

# ETSI TR 129 998-4-1 V9.0.0 (2010-01)

---

*Technical Report*

**Digital cellular telecommunications system (Phase 2+);  
Universal Mobile Telecommunications System (UMTS);  
LTE;  
Open Service Access (OSA);  
Application Programming Interface (API)  
Mapping for Open Service Access;  
Part 4: Call Control Service Mapping;  
Subpart 1: API to CAP Mapping  
(3GPP TR 29.998-04-1 version 9.0.0 Release 9)**

---



---

Reference

RTR/TSGC-0029998-04-1v900

---

Keywords

GSM, LTE, UMTS

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

**Important notice**

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

[http://portal.etsi.org/chaicor/ETSI\\_support.asp](http://portal.etsi.org/chaicor/ETSI_support.asp)

---

**Copyright Notification**

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2010.  
All rights reserved.

**DECT**<sup>TM</sup>, **PLUGTESTS**<sup>TM</sup>, **UMTS**<sup>TM</sup>, **TIPHON**<sup>TM</sup>, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

**3GPP**<sup>TM</sup> is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

**LTE**<sup>TM</sup> is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners.

**GSM**<sup>®</sup> and the GSM logo are Trade Marks registered and owned by the GSM Association.

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This Technical Report (TR) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

# Contents

|   |           |
|---|-----------|
| Intellectual Property Rights .....            | 2         |
| Foreword.....                                 | 2         |
| Foreword.....                                 | 4         |
| Introduction .....                            | 4         |
| 1 Scope .....                                 | 5         |
| 2 References .....                            | 5         |
| 3 Definitions and abbreviations.....          | 6         |
| 3.1 Definitions .....                         | 6         |
| 3.2 Abbreviations .....                       | 6         |
| 4 Generic Call Control CAMEL Call Flows ..... | 6         |
| 4.1 Call Control Manager.....                 | 6         |
| 4.1.1 enableCallNotification .....            | 6         |
| 4.1.2 disableCallNotification .....           | 7         |
| 4.1.3 changeCallNotification .....            | 8         |
| 4.1.4 getCriteria .....                       | 9         |
| 4.1.5 setCallLoadControl .....                | 9         |
| 4.1.6 callNotificationInterrupted.....        | 10        |
| 4.1.7 callNotificationContinued.....          | 11        |
| 4.1.8 callAborted .....                       | 11        |
| 4.1.9 callEventNotify .....                   | 12        |
| 4.2 Call .....                                | 14        |
| 4.2.1 routeReq.....                           | 14        |
| 4.2.2 routeRes .....                          | 18        |
| 4.2.3 routeErr .....                          | 19        |
| 4.2.4 release .....                           | 20        |
| 4.2.5 deassignCall .....                      | 21        |
| 4.2.6 getCallInfoReq.....                     | 21        |
| 4.2.7 getCallInfoRes .....                    | 22        |
| 4.2.8 getCallInfoErr .....                    | 23        |
| 4.2.9 superviseCallReq .....                  | 24        |
| 4.2.10 superviseCallRes.....                  | 24        |
| 4.2.11 superviseCallErr .....                 | 25        |
| 4.2.12 setAdviceOfCharge.....                 | 26        |
| 4.2.13 setCallChargePlan.....                 | 27        |
| 4.2.14 callFaultDetected .....                | 28        |
| 4.2.15 callEnded .....                        | 28        |
| 5 Detailed Parameter Mappings .....           | 29        |
| 5.1 TpCallMonitorMode .....                   | 29        |
| 5.2 TpCallReportType.....                     | 30        |
| 5.3 TpCallEventName .....                     | 30        |
| 5.4 TpCallAdditionalReportInfo .....          | 31        |
| <b>Annex A: Change history .....</b>          | <b>32</b> |
| History .....                                 | 33        |

## Foreword

This Technical Report has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

## Introduction

### Structure of the OSA API Mapping (3GPP TR 29.998)

The present document is part 4 subpart 1 of a multi-part deliverable covering the Open Service Access (OSA); Application Programming Interface (API) Mapping for OSA.

**Table: Overview of the OSA APIs & Protocol Mappings 29.198 & 29.998-family**

| OSA API specifications 29.198-family |   |                               |                                   |                                   |                             | OSA API Mapping - 29.998-family |  |
|--------------------------------------|---|-------------------------------|-----------------------------------|-----------------------------------|-----------------------------|---------------------------------|--|
| 29.198-01                            | Overview                                  |                               |                                   |                                   |                             | 29.998-01                       | Overview                                     |
| 29.198-02                            | Common Data Definitions                   |                               |                                   |                                   |                             | 29.998-02                       | <i>Not Applicable</i>                        |
| 29.198-03                            | Framework                                 |                               |                                   |                                   |                             | 29.998-03                       | <i>Not Applicable</i>                        |
| Call Control (CC) SCF                | 29.198-04-1<br>Common CC data definitions | 29.198-04-2<br>Generic CC SCF | 29.198-04-3<br>Multi-Party CC SCF | 29.198-04-4<br>Multi-media CC SCF | 29.198-04-5<br>Conf. CC SCF | <b>29.998-04-1</b>              | <b>Generic Call Control – CAP mapping</b>    |
|                                      |   |                               |                                   |                                   |                             | 29.998-04-2                     | <i>Generic Call Control – INAP mapping</i>   |
|                                      |   |                               |                                   |                                   |                             | 29.998-04-3                     | <i>Generic Call Control – Megaco mapping</i> |
|                                      |   |                               |                                   |                                   |                             | 29.998-04-4                     | Multiparty Call Control – ISC mapping        |
| 29.198-05                            | User Interaction SCF                      |                               |                                   |                                   |                             | 29.998-05-1                     | User Interaction – CAP mapping               |
|                                      |   |                               |                                   |                                   |                             | 29.998-05-2                     | <i>User Interaction – INAP mapping</i>       |
|                                      |   |                               |                                   |                                   |                             | 29.998-05-3                     | <i>User Interaction – Megaco mapping</i>     |
|                                      |   |                               |                                   |                                   |                             | 29.998-05-4                     | User Interaction – SMS mapping               |
| 29.198-06                            | Mobility SCF                              |                               |                                   |                                   |                             | 29.998-06-1                     | User Status and User Location – MAP mapping  |
|                                      |   |                               |                                   |                                   |                             | 29.998-06-2                     | User Status and User Location – SIP mapping  |
| 29.198-07                            | Terminal Capabilities SCF                 |                               |                                   |                                   |                             | 29.998-07                       | <i>Not Applicable</i>                        |
| 29.198-08                            | Data Session Control SCF                  |                               |                                   |                                   |                             | 29.998-08                       | Data Session Control – CAP mapping           |
| 29.198-09                            | <i>Generic Messaging SCF</i>              |                               |                                   |                                   |                             | 29.998-09                       | <i>Not Applicable</i>                        |
| 29.198-10                            | Connectivity Manager SCF                  |                               |                                   |                                   |                             | 29.998-10                       | <i>Not Applicable</i>                        |
| 29.198-11                            | Account Management SCF                    |                               |                                   |                                   |                             | 29.998-11                       | <i>Not Applicable</i>                        |
| 29.198-12                            | Charging SCF                              |                               |                                   |                                   |                             | 29.998-12                       | <i>Not Applicable</i>                        |
| 29.198-13                            | Policy Management SCF                     |                               |                                   |                                   |                             | 29.998-13                       | <i>Not Applicable</i>                        |
| 29.198-14                            | Presence & Availability Management SCF    |                               |                                   |                                   |                             | 29.998-14                       | <i>Not Applicable</i>                        |
| 29.198-15                            | Multi Media Messaging SCF                 |                               |                                   |                                   |                             | 29.998-15                       | <i>Not Applicable</i>                        |
| 29.198-16                            | Service Broker SCF                        |                               |                                   |                                   |                             | 29.998-16                       | <i>Not Applicable</i>                        |

---

# 1 Scope

The present document investigates how the OSA Call Control Interface Class methods defined in 3GPP TS 29.198-4 [5] can be mapped onto CAMEL Application Part (CAP) operations and Mobile Application Part (MAP) operations.

The mapping of the OSA API to the CAP and relevant MAP operations is considered informative, and not normative. An overview of the mapping TR is contained in the introduction of the present document as well as in 3GPP TR 29.998-1 [10].

The OSA specifications define an architecture that enables application developers to make use of network functionality through an open standardised interface, i.e. the OSA APIs. The API specification is contained in the 3GPP TS 29.198 series of specifications. An overview of these is available in the introduction of the present document as well as in 3GPP TS 29.198-1 [1]. The concepts and the functional architecture for the Open Service Access (OSA) are described by 3GPP TS 23.198 [3]. The requirements for OSA are defined in 3GPP TS 22.127 [2].

---

# 2 References

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TS 29.198-1: "Open Service Access (OSA); Application Programming Interface (API); Part 1: Overview".
- [2] 3GPP TS 22.127: "Service Requirement for the Open Service Access (OSA); Stage 1".
- [3] 3GPP TS 23.198: "Open Service Access (OSA); Stage 2".
- [4] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [5] 3GPP TS 29.198-4-1/5: "Open Service Access (OSA); Application Programming Interface (API); Part 4: Call control; Sub-part 1: Call Control Common Definitions".  
Sub-part 2: Generic Call Control SCF".  
Sub-part 3: "Multi-Party Call Control SCF".  
Sub-part 4: "Multi-Media Call Control SCF".  
Sub-part 5: "Conference call control SCF".
- [6] 3GPP TS 29.002: "Mobile Application Part (MAP) specification".
- [7] 3GPP TS 29.078: "Customised Applications for Mobile network Enhanced Logic (CAMEL); CAMEL Application Part (CAP) specification".
- [8] 3GPP TS 22.101: "Service Aspects; Service Principles".
- [9] ITU-T Recommendation Q.850: "Usage of cause and location in the Digital Subscriber Signalling System No. 1 and the Signalling System No. 7 ISDN User Part".
- [10] 3GPP TR 29.998-1: "Open Service Access (OSA); Application Programming Interface (API) Mapping for OSA; Part 1: General Issues on API Mapping".

## 3 Definitions and abbreviations

### 3.1 Definitions

For the purposes of the present document, the terms and definitions given in TS 29.198-1 [1] apply.

### 3.2 Abbreviations

For the purposes of the present document, the abbreviations given in TS 29.198-1 [1] apply.


## 4 Generic Call Control CAMEL Call Flows

### 4.1 Call Control Manager

The generic call manager interface class provides the management functions to the generic call SCFs. The application programmer can use this interface to create call objects and to enable or disable call-related event notifications.

#### 4.1.1 enableCallNotification

*enableCallNotification* is used to enable call notifications to be sent to the application.

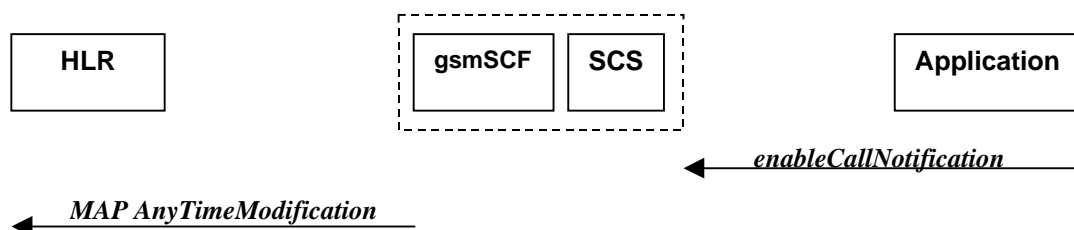

**Figure 4-1: Call Flow for enableCallNotification**

Two alternatives have been identified.

1. The application requests notifications to be enabled (see table 4-1).
2. HLR rejects CSI updates (see table 4-2).

**Table 4-1: Normal Operation**

| Pre-conditions | An agreement is established between the network operator and the service provider for the event notification to be enabled   |
|----------------|--|
| 1              | The application invokes the <i>enableCallNotification</i> method   |
| 2              | The gsmSCF sends a MAP <i>AnyTimeModification</i> to the HLR in order to Activate the necessary CAMEL Subscription Information (O-CSI, D-CSI, T-CSI, VT-CSI).<br>NOTE: CAMEL phase 3 only allows for activation/deactivation of the CSI and not modification of the contents of the CSIs.<br>The O-CSI and D-CSI will be activated if the originating address is present and the T-CSI and VT-CSI will be activated if the destination address is present. |

Table 4-2: Error condition

| Pre-conditions | gsmSCF had previously sent a MAP <i>AnyTimeModification</i> message to the HLR as a result of an <i>enableCallNotification</i> request from the application |
|----------------|---|
| 1              | HLR rejects the request to update the CSI   |
| 2              | The gsmSCF sends an internal message to the SCS to indicate the up date failure   |
| 3              | The SCS invokes the exception on <i>enableCallNotification</i>  |

Table 4-3: Parameter Mapping

| From: <i>enableCallNotification</i>  | To: MAP <i>AnyTimeModification</i>   |
|--|--|
| applInterface  |  |
| eventCriteria (TpCallEventCriteria) :  |  |
| DestinationAddress   | subscriberIdentity (see note)<br>modificationRequestFor-CSI                      |
| OriginationAddress   | subscriberIdentity (see Note)<br>modificationRequestFor-CSI                      |
| CallEventName (TpCallEventName)  | CAMEL Subscription Information:<br>- T-CSI;<br>- VT-CSI;<br>- O-CSI;<br>- D-CSI. |
| CallNotificationType   |  |
| assignmentID   |  |
|  | modificationRequestFor-SS-Info   |
|  | gsmSCF address   |
| NOTE: In case an address range is used, a separate MAP <i>AnyTimeModificationRequest</i> shall be sent for every address in the range. |  |

### 4.1.2 disableCallNotification

*disableCallNotification* is used by the application to disable call notifications.

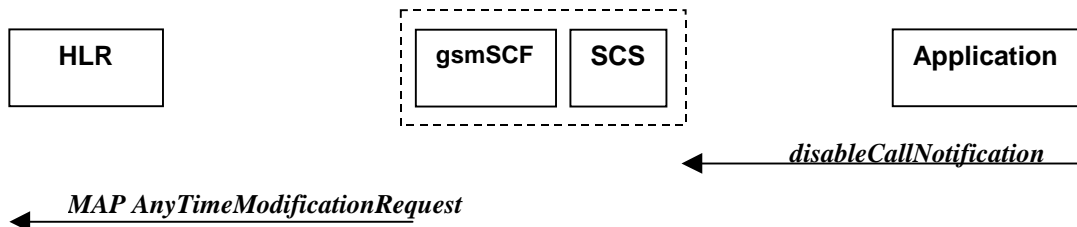


Figure 4-2: Call Flow for disableCallNotification

Table 4-4: Normal Operation

| Pre-conditions | An agreement is established between the network operator and the service provider for the event notification to be disabled  |
|----------------|--|
| 1              | The application invokes the <i>disableCallNotification</i> method  |
| 2              | The gsmSCF sends a MAP <i>AnyTimeModification</i> to the HLR in order to de-activate the CAMEL subscription Information (O-CSI, D-CSI, T-CSI, VT-CSI).<br>NOTE: CAMEL Phase 3 only allows the capability to activate/deactivate CSI and not to modify the triggering information.<br>The O-CSI and D-CSI will be deactivated if the originating address is present and the T-CSI and VT-CSI will be deactivated if the destination address is present. |




**Table 4-5: Parameter Mapping**

| From: disableCallNotification | To: MAP AnyTimeModification |
|-------------------------------|-----------------------------|
| assignmentID                  |                             |
|                               | gsmSCFAddress               |

### 4.1.3 changeCallNotification

*changeCallNotification* is used by the application to change the call notifications previously set by *enableCallNotification()*.

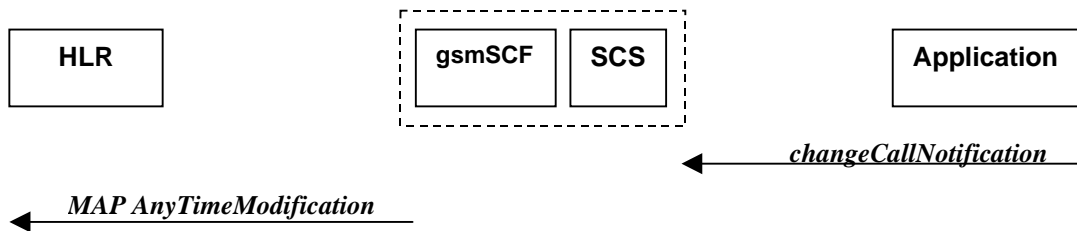

**Figure 4-3: Call Flow for changeCallNotification**

**Table 4-6: Normal Operation**

| Pre-conditions | Notifications have been enabled by the application.  |
|----------------|--|
| 1              | The application invokes the <i>changeCallNotification</i> method   |
| 2              | The gsmSCF sends a MAP <i>AnyTimeModification</i> to the HLR in order to active and de-activate the CAMEL subscription Information (O-CSI, T-CSI, VT-CSI). The SCS and gsmSCF will have to determine which CSIs to active and which to de-activate in order to reflect the changed set of notifications.<br>The O-CSI and D-CSI will be modified if the originating address is present and the T-CSI and VT-CSI will be modified if the destination address is present |

**Table 4-7: Parameter Mapping**

| From: changeCallNotification         | To: MAP AnyTimeModification  |
|--------------------------------------|--|
| assignmentID                         |  |
| eventCriteria (TpCallEventCriteria): |  |
| DestinationAddress                   | subscriberIdentity (see note)<br>modificationRequestFor-CSI  |
| OriginationAddress                   | subscriberIdentity (see note)<br>modificationRequestFor-CSI  |
| CallEventName (TpCallEventName)      | CAMEL Subscription Information:<br>- T-CSI;<br>- VT-CSI;<br>- O-CSI;<br>- D-CSI.   |
| CallNotificationType                 |  |
|                                      | modificationRequestFor-SS-Info   |
|                                      | gsmSCFAddress  |
| NOTE:                                | In case an address range is used, a separate MAP AnyTimeModificationRequest shall be sent for every address in the range |

### 4.1.4 getCriteria

*getCriteria* is used by the application to query the event criteria set with *enableCallNotification*.

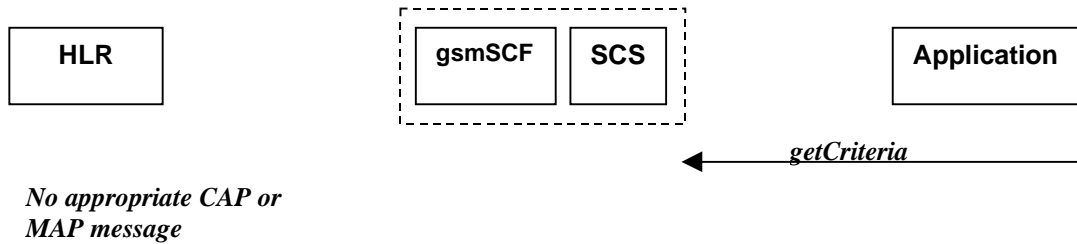


Figure 4-4: Call Flow for getCriteria

Table 4-8: Normal Operation

| Pre-conditions | Notifications have been enabled by the application    |
|----------------|---|
| 1              | The application invokes the <i>getCriteria</i> method |
| 2              | The SCS returns the criteria                          |

#### Parameter Mapping

None.

### 4.1.5 setCallLoadControl

*setCallLoadControl* is a method used to control the number of invoked methods i.e. to restrict the load placed on the application server.

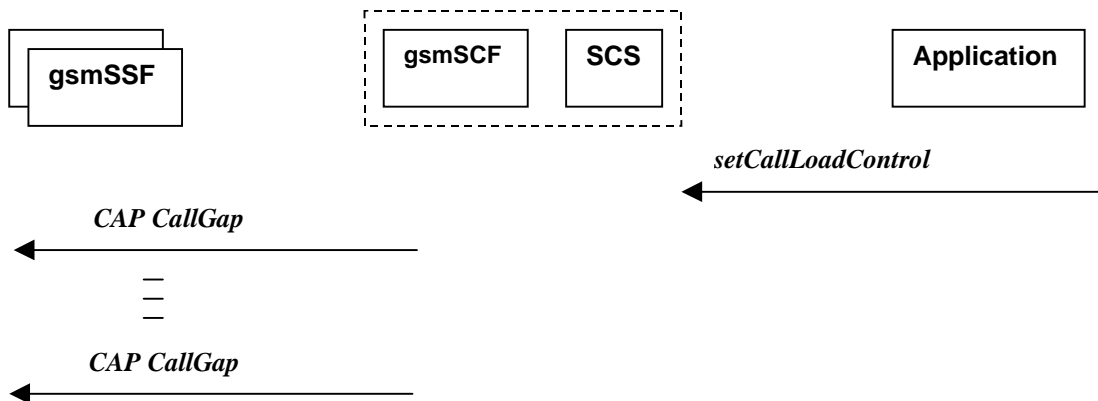


Figure 4-5: Call Flow for release

Table 4-9: Normal Operation


| Pre-conditions | Call Control Manager is in active state   |
|----------------|---|
| 1              | The application invokes the <i>setCallLoadControl</i> method  |
| 2              | The SCS sends an equivalent message to the gsmSCF   |
| 3              | The gsmSCF may invoke the CAP <b>CallGap</b> operations towards different gsmSSFs. CallGap can be sent in CAP only after the dialogue has been opened first by sending InitialDP. |

**Table 4-10: Parameter Mapping**

| From: setCallLoadControl  | To: CAP CallGap                                       |
|---|---|
| duration  | gapIndicators<br>duration                             |
| mechanism<br>callLoadControlPerInterval                                   | gapIndicators<br>gapInterval                          |
| treatment<br>ReleaseCause<br>AdditionalTreatmentInfo<br>InformationToSend | gapTreatment<br>ReleaseCause<br><br>InformationToSend |
| addressRange  | gapCriteria<br>basicGapCriteria<br>calledAddressValue |
| assignmentID  |   |

### 4.1.6 callNotificationInterrupted

*callNotificationInterrupted* indicates to the application that all event notifications have been interrupted, for example due to faults detected.

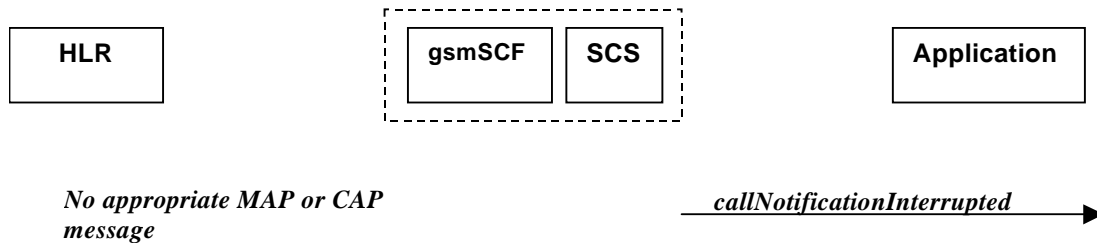

**Figure 4-6: Call Flow for callNotificationInterrupted**

**Table 4-11: Normal Operation**

| Pre-conditions | Call notifications have been enabled using the <i>enableNotification</i> method on the Call Manager interface |
|----------------|---|
| 1              | The SCS has detected, or has been informed of, a fault which prevents further events from being notified      |
| 2              | The SCS invokes the <i>callNotificationInterrupted</i> method   |

#### Parameter Mapping

None.

### 4.1.7 callNotificationContinued

*callNotificationContinued* indicates to the application that all event notifications have been previously interrupted, have now started again.

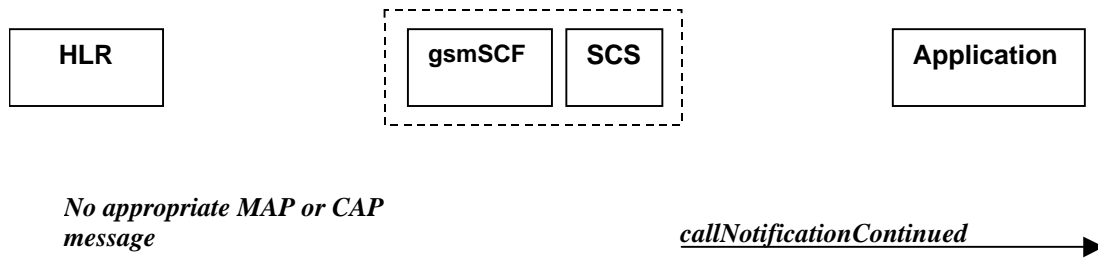


Figure 4-7: Call Flow for callNotificationContinued

Table 4-12: Normal Operation

| Pre-conditions | Call notifications have been interrupted and <i>callNotificationInterrupted</i> method has been invoked |
|----------------|---|
| 1              | The SCS detects that call notifications are again possible.   |
| 2              | The SCS invokes the <i>callNotificationContinued</i> method   |

#### Parameter Mapping

None.

### 4.1.8 callAborted

*callAborted* indicates to the application that the call object has aborted or terminated abnormally. No further communication will be possible between the call and the application.

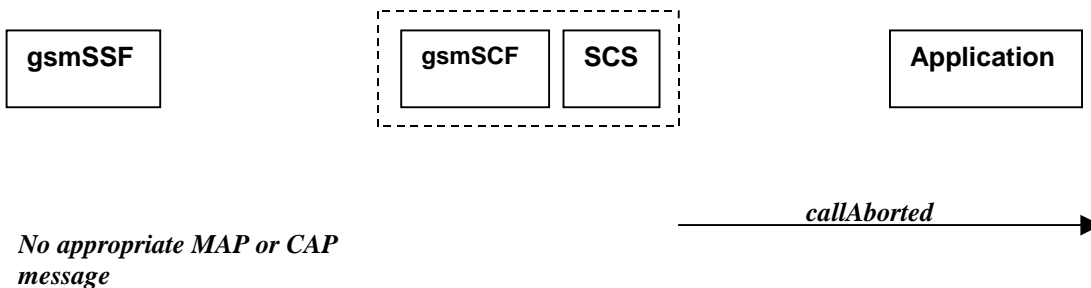


Figure 4-8: Call Flow for callAborted

Table 4-13: Normal Operation

| Pre-conditions |   |
|----------------|---|
| 1              | The SCS detect a catastrophic failure in its communication with the gsmSCF  |
| 2              | The SCS, invokes the <i>callAborted</i> method. The call running in the network may continue and will not have been affected by this failure between the gsmSCF and the SCS |

#### Parameter Mapping

None.

## 4.1.9 callEventNotify

*callEventNotify* notifies the application of the arrival of a call-related event.

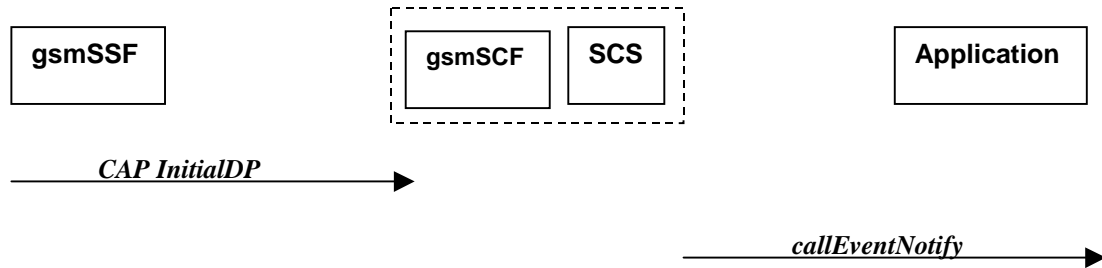


Figure 4-9: Call Flow for callEventNotify

Table 4-14: Normal Operation

| Pre-conditions | Call notifications have been enabled using the <i>enableCallNotification</i> method on the Call Manager interface  |
|----------------|--|
| 1              | A call arrives at the gsmSSF causing initial triggering to the gsmSCF CAP <i>InitialDP</i>                         |
| 2              | The gsmSCF recognizes the need for an API service and passes the triggering information to the SCS                 |
| 3              | The SCS identifies the application responsible for handling the call and invokes the <i>callEventNotify</i> method |

**Table 4-15: Parameter Mapping**

| From: CAP InitialDP                               | To: <i>callEventNotify</i>       |
|---|----------------------------------|
|   | callReference                    |
|   | eventInfo (TpCallEventInfo) :    |
|   | destinationAddress               |
| calledPartyNumber                                 |                                  |
| calledPartyBCDNumber BCD                          |                                  |
| calling Party Number                              | originatingAddress               |
| originalCalledPartyID                             | originalDestinationAddress       |
| redirectingPartyID                                | redirectingAddress               |
|   | callAppInfo (TpCallAppInfoSet) : |
|   | CallAppAlertingMechanism         |
|   | CallAppNetworkAccessType         |
|   |                                  |
| ext-BasicServiceCode (1 <sup>st</sup> priority)   | CallAppBearerService             |
|   | CallAppTeleService               |
| highLayerCompatibility (2 <sup>nd</sup> priority) | CallAppTeleService               |
| bearerCapability (2 <sup>nd</sup> priority)       | CallAppBearerService             |
| callingPartysCategory                             | CallAppPartyCategory             |
|   | CallAppPresentationAddress       |
|   | CallAppGenericInfo               |
| additionalCallingPartyNumber                      | CallAppAdditionalAddress         |
| eventTypeBCSM                                     | callEventName (see table 4-14)   |
|   | callNotificationType             |
|   | assignmentID                     |
|   | appCall                          |
| serviceKey  | (see note)                       |
| cGEncountered                                     |                                  |
| iPSSPCapabilities                                 |                                  |
| locationNumber                                    |                                  |
| redirectionInformation                            |                                  |
|   |                                  |
| iMSI  |                                  |
| subscriberState                                   |                                  |
| locationInformation                               |                                  |
| callReferenceNumber                               |                                  |
| serviceInteractionIndicatorsTwo                   |                                  |
| mscAddress  |                                  |
| timeAndTimezone                                   |                                  |
| gsm-ForwardingPending                             |                                  |
| initialDPargExtension :                           |                                  |
| naCarrierInformation                              |                                  |
| gmscAddress                                       |                                  |
| cause   |                                  |
| cug-Index   |                                  |
| cug-Interlock                                     |                                  |
| cug-OutgoingAccess                                |                                  |
| NOTE: Mapped to the method invocation.            |                                  |

Table 4-16: eventTypeBCSM mapping to callEventName

| From: CAP InitialDP parameter eventTypeBCSM  | To: callEventNotify parameter callEventName in eventInfo |
|--|--|
| <no mapping available>   | P_EVENT_NAME_UNDEFINED                                   |
| <no mapping available>   | P_EVENT_GCCS_OFFHOOK_EVENT                               |
| collectedInfo, termAttemptAuthorized   | P_EVENT_GCCS_ADDRESS_COLLECTED_EVENT                     |
| analyzedInformation  | P_EVENT_GCCS_ADDRESS_ANALYSED_EVENT                      |
| tBusy  | P_EVENT_GCCS_CALLED_PARTY_BUSY                           |
| tBusy (see note)   | P_EVENT_GCCS_CALLED_PARTY_UNREACHABLE                    |
| tNoAnswer  | P_EVENT_GCCS_NO_ANSWER_FROM_CALLED_PARTY                 |
| routeSelectFailure   | P_EVENT_GCCS_ROUTE_SELECT_FAILURE                        |
| <no mapping available>   | P_EVENT_GCCS_ANSWER_FROM_CALL_PARTY                      |
| NOTE: Depending on the value of the <i>cause</i> parameter in the <i>initialDPArg extensions</i> parameter of the InitialDP operation. |  |

## 4.2 Call

The generic call interface represents the interface to the generic call SCF. It provides a structure to allow simple and complex call behaviour.

### 4.2.1 routeReq

*routeReq* is an asynchronous method which requests routing of the call (and inherently attached parties) to the destination party, via a passive call leg.

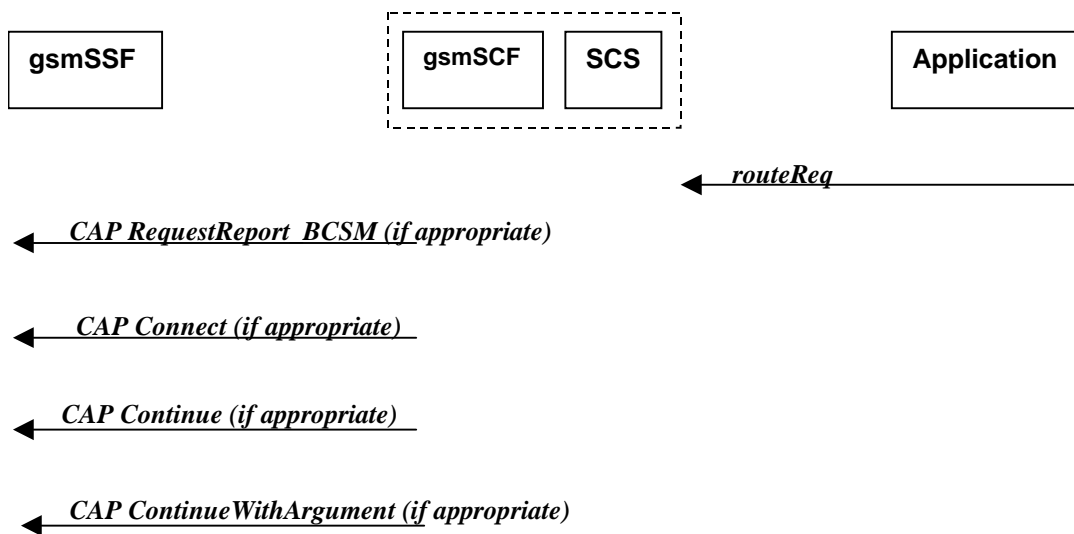


Figure 4-10: Call Flow for routeReq

Three alternatives have been identified:

1. The application changes the destination number (see table 4-17).
2. The application does not modify the destination address and does not provide any Application Information (see table 4-20).
3. The application does not modify the destination party number but modifies Application information (see table 4-23).

Table 4-17: Normal Operation

| Pre-conditions | The application has been notified of a new call and the call object exists.<br>The <i>setCallChargePlan</i> and <i>getCallInfoReq</i> methods may have been invoked |
|----------------|---|
| 1              | The application invokes the <b>routeReq</b> method  |
| 2              | The SCS sends an equivalent internal message to the gsmSCF  |
| 3              | The gsmSCF sends a CAP <b>RequestReportBCSM</b> if the application needs to be informed about the outcome of the request  |
| 4              | The gsmSCF sends a CAP <b>Connect</b> message   |

Table 4-18: Parameter Mapping

| From: routeReq  | To: CAP RequestReportBCSMEvent |
|---|--------------------------------|
| callSessionID   |                                |
| responseRequested (TpCallReportRequestSet) :  | bcsmEvent :                    |
| <b>MonitorMode</b> (TpCallMonitorMode)  | <b>monitorMode</b>             |
| <b>CallReportType</b> (TpCallReportType)  | <b>eventTypeBCSM</b>           |
| <b>AdditionalReportCriteria</b><br>(TpCallReportAdditionalCriteria):                                    | dPSpecificCriteria :           |
| noAnswerDuration  | applicationTimer               |
| serviceCode   |                                |
|   | <b>legID (see note)</b>        |
| targetAddress   |                                |
| originatingAddress  |                                |
| originalDestinationAddress  |                                |
| redirectingAddress  |                                |
| appInfo   |                                |
| callLegSessionID  |                                |
| NOTE: The legID for both the originating and the terminating leg are required for the disconnect event. |                                |



Table 4-19:

| From: routeReq               | To: CAP Connect   |
|------------------------------|---|
| callSessionID                |   |
| responseRequested            |   |
| targetAddress                | destinationRoutingAddress   |
| originatingAddress           |   |
| originalDestinationAddress   | originalCalledPartyID   |
| redirectingAddress           | redirectingPartyID  |
| appInfo (TpCallAppInfoSet) : |   |
| CallAppAlertingMechanism     | alertingPattern   |
| CallAppNetworkAccessType     |   |
| CallAppTeleService           |   |
| CallAppBearerService         |   |
| CallAppPartyCategory         | callingPartysCategory   |
| PresentationAddress          | genericNumbers (see note)   |
| CallAppGenericInfo           |   |
| CallAppAdditionalAddress     | genericNumbers  |
| callLegSessionID             |   |
|                              | serviceInteractionIndicatorsTwo   |
|                              | redirectionInformation  |
|                              | suppressionOfAnnouncement   |
|                              | oCSIAplicable   |
|                              | na-Info :   |
|                              | naCarrierInformation  |
|                              | naOliInfo   |
|                              | naChargeNumber  |
|                              | connectArgExtension :   |
|                              | cug-Interlock   |
|                              | cug-OutgoingAccess  |
|                              | nonCug-Call   |
| NOTE:                        | Operator specific function if CallAppAdditionalAddress is not used to map the genericNumbers parameter. |

Table 4-20

| Pre-conditions | The application has been notified of a new call and the call object exists.<br>The <i>setCallChargePlan</i> and <i>getCallInfoReq</i> methods may have been invoked |
|----------------|---|
| 1              | The application invokes the <b>routeReq</b> method  |
| 2              | The SCS sends an equivalent internal message to the gsmSCF  |
| 3              | The gsmSCF sends a CAP <b>RequestReportBSCM</b> if the application needs to be informed about the outcome of the request  |
| 4              | The gsmSCF sends a CAP <b>Continue</b> message  |

**Table 4-21: Parameter Mapping**

| From: routeReq  | To: CAP RequestReportBCSMEvent |
|---|--------------------------------|
| callSessionID   |                                |
| responseRequested (TpCallReportRequestSet):   | bcsmevent:                     |
| <b>MonitorMode</b> (TpCallMonitorMode)  | <b>monitorMode</b>             |
| <b>CallReportType</b> (TpCallReportType)  | <b>eventTypeBCSM</b>           |
| <b>AdditionalReportCriteria</b> (TpCallReportAdditionalCriteria):                                       | <b>dPSpecificCriteria :</b>    |
| noAnswerDuration  | applicationTimer               |
| serviceCode   |                                |
|   | legID (see note)               |
| targetAddress   |                                |
| originatingAddress  |                                |
| originalDestinationAddress  |                                |
| redirectingAddress  |                                |
| appInfo   |                                |
| callLegSessionID  |                                |
| NOTE: The legID for both the originating and the terminating leg are required for the disconnect event. |                                |

**Table 4-22**

| From: routeReq             | To: CAP Continue |
|----------------------------|------------------|
| callSessionID              |                  |
| responseRequested          |                  |
| targetAddress              |                  |
| originatingAddress         |                  |
| originalDestinationAddress |                  |
| redirectingAddress         |                  |
| appInfo                    |                  |
| callLegSessionID           |                  |

**Table 4-23**

| Pre-conditions | The application has been notified of a new call and the call object exists. The <i>setCallChargePlan</i> and <i>getCallInfoReq</i> methods may have been invoked |
|----------------|--|
| 1              | The application invokes the <b>routeReq</b> method   |
| 2              | The SCS sends an equivalent internal message to the gsmSCF   |
| 3              | The gsmSCF sends a CAP <b>RequestReportBSCM</b> if the application needs to be informed about the outcome of the request   |
| 4              | The gsmSCF sends a CAP <b>ContinueWithArgument</b> message   |

**Table 4-24: Parameter Mapping**

| From: routeReq  | To: CAP RequestReportBCSMEvent |
|---|--------------------------------|
| callSessionID   |                                |
| responseRequested (TpCallReportRequestSet):   | bcsmEvent :                    |
| <b>MonitorMode</b> (TpCallMonitorMode)  | <b>monitorMode</b>             |
| <b>CallReportType</b> (TpCallReportType)  | <b>eventTypeBCSM</b>           |
| <b>AdditionalReportCriteria</b> (TpCallReportAdditionalCriteria):                                       | <b>dPSpecificCriteria:</b>     |
| noAnswerDuration  | applicationTimer               |
| serviceCode   |                                |
|   | legID (see note)               |
| targetAddress   |                                |
| originatingAddress  |                                |
| originalDestinationAddress  |                                |
| redirectingAddress  |                                |
| appInfo   |                                |
| callLegSessionID  |                                |
| NOTE: The legID for both the originating and the terminating leg are required for the disconnect event. |                                |

**Table 4-25**

| From: routeReq  | To: CAP ContinueWithArgument      |
|---|-----------------------------------|
| callSessionID   |                                   |
| responseRequested   |                                   |
| targetAddress   |                                   |
| originatingAddress  |                                   |
| originalDestinationAddress  |                                   |
| redirectingAddress  |                                   |
| appInfo:  |                                   |
| CallAppAlertingMechanism  | alerting Pattern                  |
| CallAppNetworkAccessType  |                                   |
| CallAppTeleService  |                                   |
| CallAppBearerService  |                                   |
| CallAppPartyCategory  | callingPartysCategory             |
| PresentationAddress   | genericNumbers (see note)         |
| CallAppGenericInfo  |                                   |
| CallAppAdditionalAddress  | genericNumbers                    |
| callLegSessionID  |                                   |
|   | serviceInteractionIndicatorsTwo   |
|   | suppressionOfAnnouncement         |
|   | na-Info:                          |
|   | naCarrierInformation              |
|   | naOlInfo                          |
|   | naChargeNumber                    |
|   | continueWithArgumentArgExtension: |
|   | cug-Interlock                     |
|   | cug-OutgoingAccess                |
|   | nonCug-Call                       |
| NOTE: Operator specific function if CallAppAdditionalAddress is not used to map the genericNumbers parameter. |                                   |

### 4.2.2 routeRes

*routeRes* is an asynchronous method which indicates that the request to route the call to the destination was successful, and indicates the response of the destination party (for example, the call was answered, not answered, refused due to busy, etc.). For every trigger that was armed in the parameter **responseRequested** of the *routeReq* a *routeRes* method may be invoked.

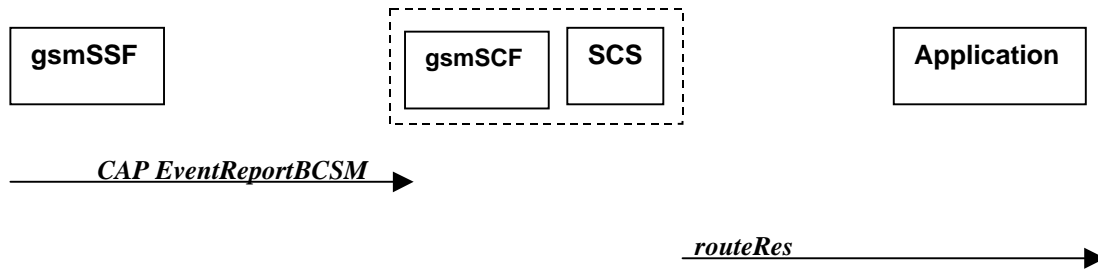


Figure 4-11: Call Flow for routeRes

Table 4-26: Normal Operation

| Pre-conditions | Call routing attempted  |
|----------------|---|
| 1              | If event reports have been requested, the gsmSSF sends a CAP <i>EventReportBCSM</i> to the gsmSCF |
| 2              | The gsmSCF sends an equivalent message to the SCS   |
| 3              | The SCS invokes the <i>routeRes</i> method  |

Table 4-27: Parameter Mapping

| From: CAP EventReportBCSM    | To: routeRes                                      |
|------------------------------|---|
|                              | callSessionID                                     |
|                              | eventReport:                                      |
| miscCallInfo                 | MonitorMode                                       |
|                              | CallEventTime                                     |
| eventTypeBCSM                | CallReportType (TpCallReportType)                 |
| legID                        |   |
| eventSpecificInformationBCSM | AdditionalReportInfo (TpCallAdditionalReportInfo) |
|                              | callLegSessionID                                  |

### 4.2.3 routeErr

*routeErr* is an asynchronous method which indicates that the request to route the call to the destination party was unsuccessful – the call could not be routed to the destination party (for example, the network was unable to route the call, parameters were incorrect, the request was refused, etc).

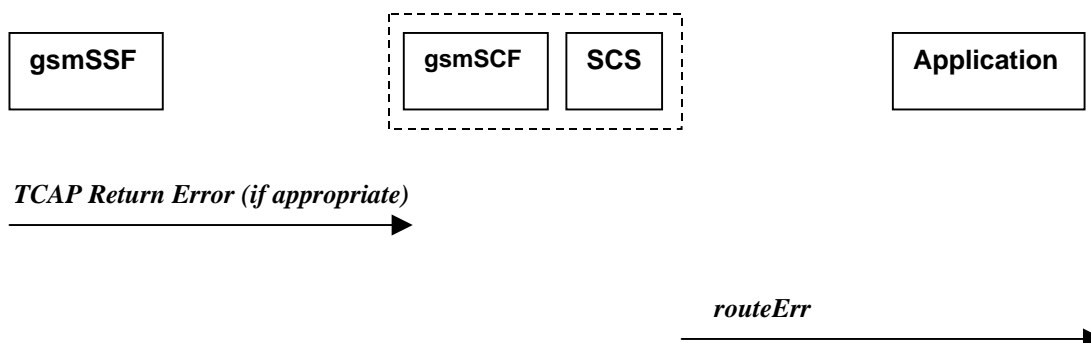


Figure 4-12: Call Flow for routeErr

Two scenarios are possible:

1. The gsmSCF receives a message from the gsmSSF indicating an error (see table 4-28).
2. The gsmSCF detects there is an error in the message from the SCS (see table 4-29).

**Table 4-28: Normal Operation**

| Pre-conditions | Call routing attempted  |
|----------------|---|
| 1              | The gsmSSF detects a call routing failure and sends an appropriate TCAP message returning an error to the gsmSCF                  |
| 2              | The gsmSCF sends an equivalent message to the SCS   |
| 3              | The SCS detects an error with the <i>routeReq</i> method, or receives a TCAP Return Error, and invokes the <i>routeErr</i> method |

**Table 4-29**


| Pre-conditions | Call routing attempted  |
|----------------|---|
| 1              | The gsmSCF detects an error in the parameters of the internal message from the SCS requesting a <i>routeReq</i> |
| 2              | The gsmSCF sends an equivalent message to the SCS   |
| 3              | The SCS invokes the <i>routeErr</i> method  |

**Table 4-30: Parameter Mapping**

| From: TCAP Return Error   | To: routeErr     |
|---------------------------|------------------|
|                           | callSessionID    |
| TC-U-ERROR<br>TC-U-REJECT | error            |
|                           | callLegSessionID |

#### 4.2.4 release

*release* is a method used to request the release of the call and associated objects.

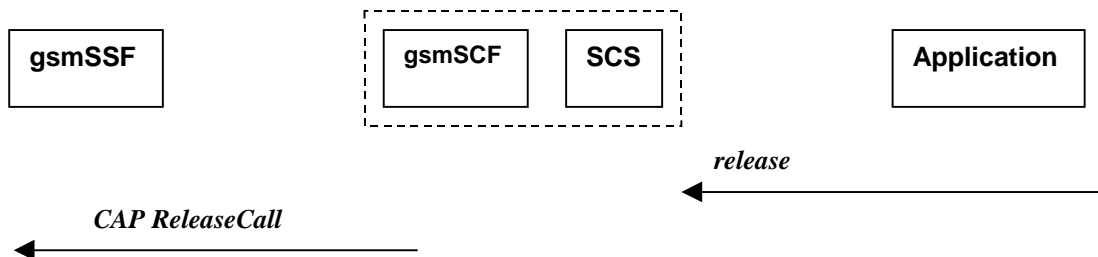

**Figure 4-13: Call Flow for release**

**Table 4-31: Normal Operation**

| Pre-conditions | Call is in progress                                     |
|----------------|---|
| 1              | The application invokes the <i>release</i> method       |
| 2              | The SCS sends an equivalent message to the gsmSCF       |
| 3              | The gsmSCF invokes the CAP <i>ReleaseCall</i> operation |

**Table 4-32: Parameter Mapping**

| From: release                                   | To: CAP ReleaseCall |
|---|---------------------|
| callSessionID                                   |                     |
| cause (TpCallReleaseCause) :                    |                     |
| value (specified in ITU-T Recommendation Q.850) | Cause               |
| location  |                     |

### 4.2.5 deassignCall

*deassignCall* is a method that requests that the relationship between the application and the call and associated objects be de-assigned. It leaves the call in progress, however, it purges the specified call object so that the application has no further control of call processing. If a call is de-assigned that has event reports or call information reports requested, then these reports will be disabled and any related information discarded.

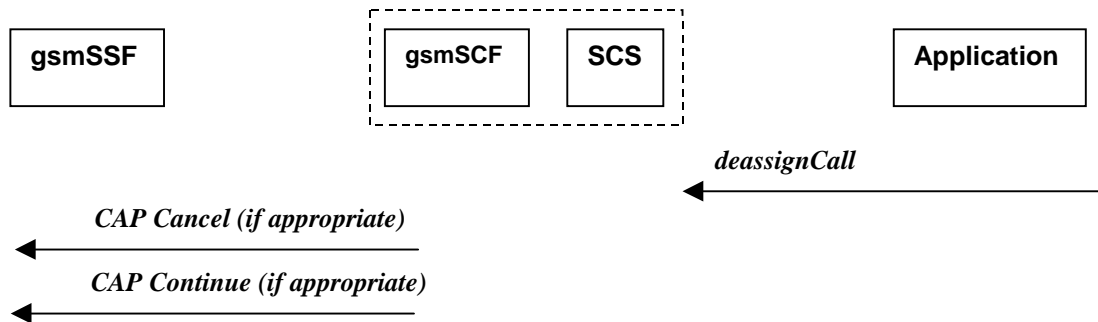


Figure 4-14: Call Flow for deassignCall

Table 4-33: Normal Operation

| Pre-conditions |  |
|----------------|--|
| 1              | The application invokes the <i>deassignCall</i> method   |
| 2              | The SCS sends an equivalent internal message to the gsmSCF   |
| 3              | The gsmSCF sends a CAP <b>Cancel</b> operation to the gsmSSF if there are any reports pending.   |
| 4              | The gsmSCF may send a CAP <b>Continue</b> to allow the interrupted call processing to continue. This is not sent if the call has already been established. |

Table 4-34: Parameter Mapping

| From: deassignCall | To: CAP Cancel |
|--------------------|----------------|
|                    | AllRequests    |
| callSessionID      |                |

Table 4-35

| From: deassignCall | To: CAP Continue |
|--------------------|------------------|
| callSessionID      |                  |

### 4.2.6 getCallInfoReq

*getCallInfoReq* is an asynchronous method that requests information associated with the call to be provided at the appropriate time (for example, to calculate charging). This method must be invoked before the call is routed to a target address. The call object will exist after the call is ended if information is required to be sent to the application at the end of the call. The information will be sent after any call event report.

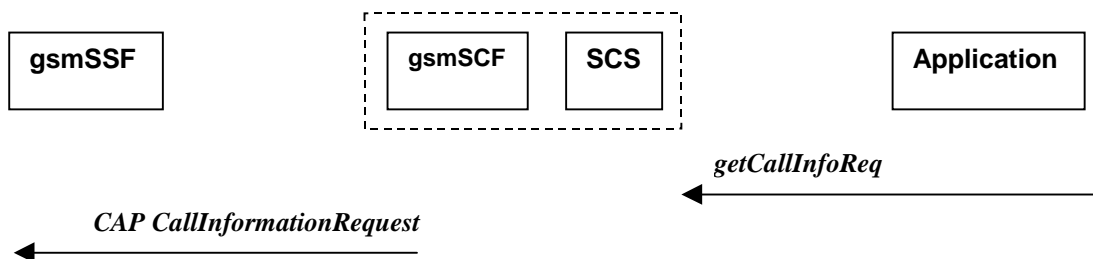


Figure 4-15: Call Flow for getCallInfoReq

**Table 4-36: Normal Operation**


| Pre-conditions |  |
|----------------|--|
| 1              | The application invokes the <i>getCallInfoReq</i> method                     |
| 2              | The SCS sends an equivalent internal message to the gsmSCF                   |
| 3              | The gsmSCF sends a CAP <i>CallInformationRequest</i> operation to the gsmSSF |

**Table 4-37: Parameter Mapping**

| From: <i>getCallInfoReq</i>                | To: CAP <i>CallInformationRequest</i>                              |
|--|--|
| callSessionID                              |  |
|  | RequestedInformationTypeList                                       |
| <b>callInfoRequested</b> (TpCallInfoType): | RequestedInformationType   |
| P_CALL_INFO_UNDEFINED                      |  |
| P_CALL_INFO_TIMES                          | callAttemptElapsedTime<br>callStopTime<br>callConnectedElapsedTime |
| P_CALL_INFO_RELEASE_CAUSE                  | releaseCause   |
| P_CALL_INFO_INTERMEDIATE                   |  |
|  | LegID  |

### 4.2.7 *getCallInfoRes*

*getCallInfoRes* is an asynchronous method that reports all the necessary information requested by the application, for example to calculate charging.

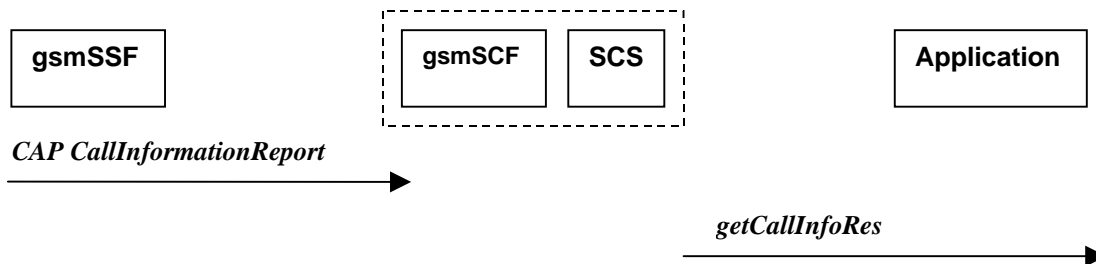

**Figure 4-16: Call Flow for *getCallInfoRes***

**Table 4-38: Normal Operation**


| Pre-conditions | Call is in progress   |
|----------------|---|
| 1              | The gsmSCF receives a CAP <i>CallInformationReport</i> from the gsmSSF                  |
| 2              | The gsmSCF sends an equivalent internal message to the SCS                              |
| 3              | The SCS identifies the correct application and invokes the <i>getCallInfoRes</i> method |

**Table 4-39: Parameter Mapping**

| From: CAP CallInformationReport                                    | To: getCallInfoRes             |
|--|--------------------------------|
|  | callSessionID                  |
| requestedInformationList   | callInfoReport :               |
| requestedInformationType :   | CallInfoType                   |
|  | P_CALL_INFO_UNDEFINED          |
| callAttemptElapsedTime<br>callStopTime<br>callConnectedElapsedTime | P_CALL_INFO_TIMES              |
| releaseCause   | P_CALL_INFO_RELEASE_CAUSE      |
|  | P_CALL_INFO_INTERMEDIATE       |
| requestedInformationValue :  |                                |
|  | CallInitiationStartTime        |
| callStopTimeValue  | CallEndTime                    |
|  | CallConnectedToResourceTime    |
|  | CallConnectedToDestinationTime |
| releaseCauseValue  | Cause                          |
| LegID  |                                |

### 4.2.8 getCallInfoErr

*getCallInfoErr* is an asynchronous method that reports that the original request was erroneous, or resulted in an error condition.

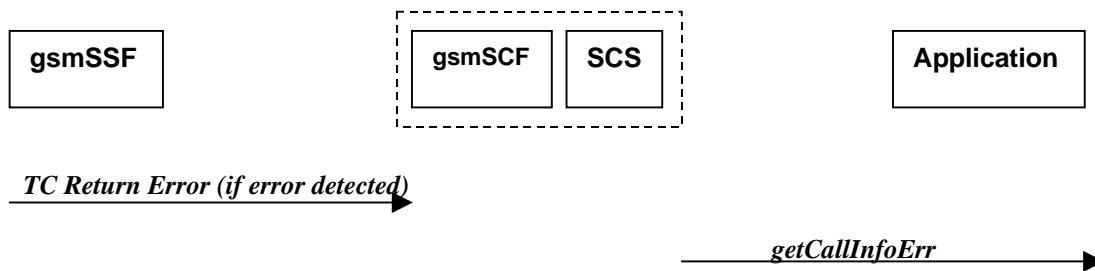

**Figure 4-17: Call Flow for getCallInfoErr**

**Table 4-40: Normal Operation**

| Pre-conditions | The application has requested information associated with a call via the <i>getCallInfoReq</i> method                         |
|----------------|---|
| 1              | A call terminates abnormally and the gsmSSF sends an error in a TCAP message to the gsmSCF, or aborts the TCAP dialogue       |
| 2              | The gsmSCF sends an equivalent message to the SCS   |
| 3              | The SCS identifies the correct applications that requested the call information and invokes the <i>getCallInfoErr</i> method. |




**Table 4-41: Parameter Mapping**

| From:         | To: <i>getCallInfoErr</i> |
|---------------|---------------------------|
| TC Primitives | <b>callSessionID</b>      |
| TC-U-ABORT    | errorIndication           |
| TC-P-ABORT    |                           |
| TC-NOTICE     |                           |
| TC-U-ERROR    |                           |
| TC-L-CANCEL   |                           |
| TC-U-CANCEL   |                           |
| TC-L-REJECT   |                           |
| TC-R-REJECT   |                           |
| TC-U-REJECT   |                           |

### 4.2.9 superviseCallReq

*superviseCallReq* is a method that is called by the application to supervise a call. The application can set a granted connection time for this call. If an application calls this method before it calls a *routeReq()* or a user interaction method the time measurement will start as soon as the call is answered by the B-party or the user interaction system.

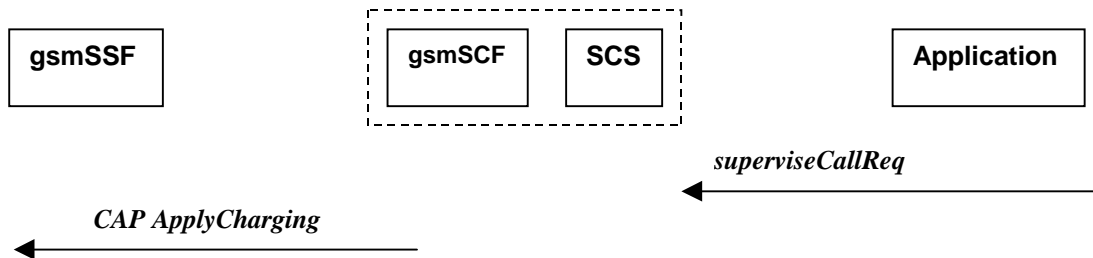

**Figure 4-18: Call Flow for superviseCallReq**

**Table 4-42: Normal Operation**

| Pre-conditions |   |
|----------------|---|
| 1              | The application invokes the <i>superviseCallReq</i> method        |
| 2              | The SCS sends an equivalent internal message to the gsmSCF        |
| 3              | The gsmSCF sends a CAP <b>ApplyCharging</b> message to the gsmSSF |

**Table 4-43: Parameter Mapping**

| From: <i>superviseCallReq</i>                 | To: CAP <b>ApplyCharging</b>         |
|---|--------------------------------------|
| callSessionID                                 |                                      |
|   | AchBillingCharging Characteristics : |
| <b>time</b>                                   | timeDurationCharging                 |
|   | - maxCallPeriodDuration              |
|   | - tariffSwitchInterval               |
| <b>treatment</b> (TpCallSuperviseTreatment) : | timeDurationCharging                 |
| P_CALL_SUPERVISE_RELEASE                      | - releaselfdurationExceeded          |
| P_CALL_SUPERVISE_RESPOND                      |                                      |
| P_CALL_SUPERVISE_APPLY_TONE                   | - tone                               |
|   | PartyToCharge                        |

### 4.2.10 superviseCallRes

*superviseCallRes* is an asynchronous method that reports a call supervision event to the application.

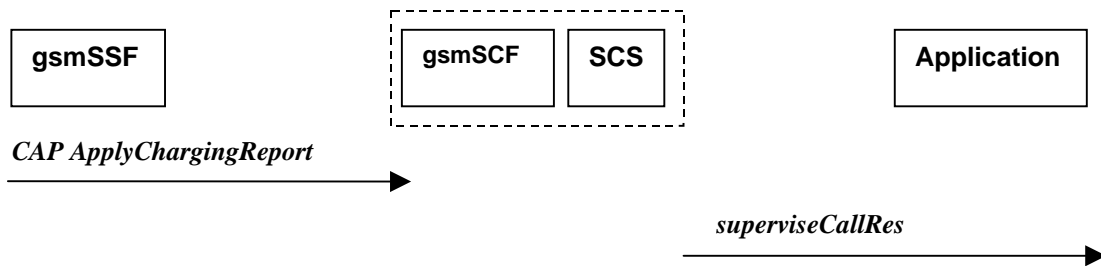


Figure 4-19: Call Flow for superviseCallRes

Table 4-44: Normal Operation

| Pre-conditions | The application has invoked the supervise Call method                                     |
|----------------|---|
| 1              | The gsmSCF receives an CAP <b>ApplyChargingReport</b> from the gsmSSF                     |
| 2              | The gsmSCF sends an equivalent internal message to the SCS                                |
| 3              | The SCS identifies the correct application and invokes the <b>superviseCallRes</b> method |

Table 4-45: Parameter Mapping

| From: CAP ApplyChargingReport | To: superviseCallRes             |
|-------------------------------|----------------------------------|
|                               | callSessionID                    |
| CallResult                    | report (TpCallSuperviseReport) : |
| - CallReleasedAtTcpExpiry     | - P_CALL_SUPERVISE_TIMEOUT       |
| - CallActive                  | - P_CALL_SUPERVISE_CALL_ENDED    |
|                               | - P_CALL_SUPERVISE_TONE_APPLIED  |
|                               | - P_CALL_SUPERVISE_UI_FINISHED   |
| CallResult                    | usedTime                         |
| - TimeInformation             |                                  |
| CallResult                    |                                  |
| - PartyToCharge               |                                  |

### 4.2.11 superviseCallErr

*superviseCallErr* is an asynchronous method that reports a call supervision error to the application.

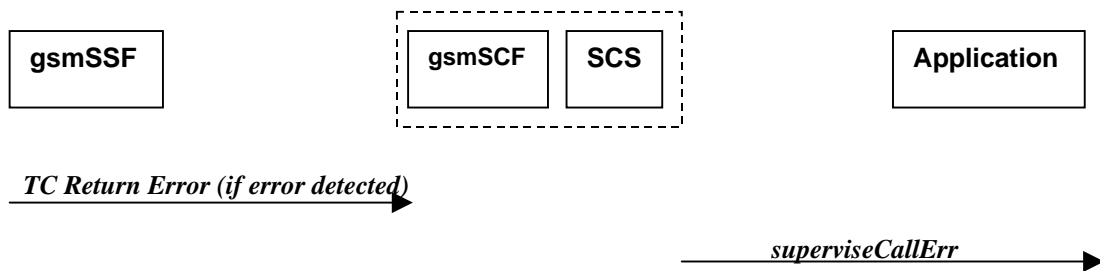


Figure 4-20: Call Flow for superviseCallErr

Table 4-46: Normal Operation


| Pre-conditions | The application has requested information associated with a call via the <i>superviseCallReq</i> method                        |
|----------------|--|
| 1              | A call terminates abnormally and the gsmSSF sends an error in a TCAP message to the gsmSCF, or aborts the TCAP dialogue        |
| 2              | The gsmSCF sends an equivalent message to the SCS  |
| 3              | The SCS identifies the correct applications that requested the call information and invokes the <b>superviseCallErr</b> method |

**Table 4-47: Parameter Mapping**

| From:  | To: <i>superviseCallErr</i>                    |
|--|--|
| <b>TC Primitives</b><br>TC-U-ABORT<br>TC-P-ABORT<br>TC-NOTICE<br>TC-U-ERROR<br>TC-L-CANCEL<br>TC-U-CANCEL<br>TC-L-REJECT<br>TC-R-REJECT<br>TC-U-REJECT | <b>callSessionID</b><br><b>errorIndication</b> |

### 4.2.12 setAdviceOfCharge

*setAdviceOfCharge* is a method that allows the application to determine the charging information that will be send to the end-users terminal.

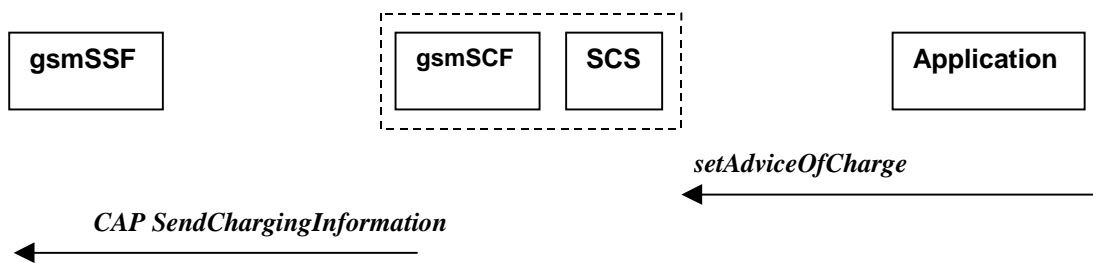

**Figure 4-21: Call Flow for setAdviceOfCharge**

**Table 4-48: Normal Operation**


| Pre-conditions |   |
|----------------|---|
| 1              | The application invokes the <b><i>setAdviceOfCharge</i></b> method              |
| 2              | The SCS sends an equivalent internal message to the gsmSCF                      |
| 3              | The gsmSCF sends a CAP <b><i>SendChargingInformation</i></b> message to the SSF |

**Table 4-49: Parameter Mapping**

| From: setAdviceOfCharge  | To: CAP SendChargingInformation  |
|--------------------------|--|
| callSessionID            |  |
| aOCInfo:<br>- CurrentCAI | SCIBillingChargingCharateristics<br>aOCBeforeAnswer<br>aOCInitial<br><br>- or -<br>SCIBillingChargingCharateristics<br>aOCAfterAnswer<br>cAI-GSM0224                                     |
| - NextCAI                | SCIBillingChargingCharateristics<br>aOCBeforeAnswer<br>aOCSubsequent<br>cAI-GSM0224  |
| tariffSwitch             | SCIBillingChargingCharateristics<br>aOCBeforeAnswer<br>aOCSubsequent<br>tariffSwitchInterval<br><br>- or -<br>SCIBillingChargingCharateristics<br>aOCAfterAnswer<br>tariffSwitchInterval |
|                          | partyToCharge  |

### 4.2.13 setCallChargePlan

*setCallChargePlan* is a method that allows the application to include charging information in network generated CDR.

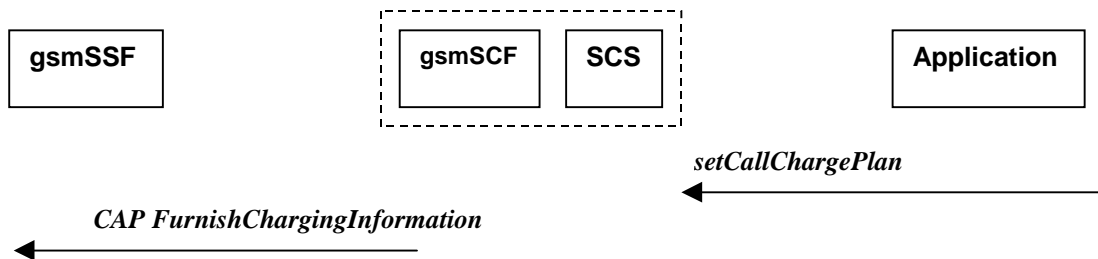

**Figure 4-22: Call Flow for setCallChargePlan**

**Table 4-50: Normal Operation**

| Pre-conditions |   |
|----------------|---|
| 1              | The application invokes the <i>setCallChargePlan</i>                        |
| 2              | The SCS sends an equivalent internal message to the gsmSCF                  |
| 3              | The gsmSCF sends a CAP <i>FurnishChargingInformation</i> message to the SSP |


**Table 4-51: Parameter Mapping**

| From: setCallChargePlan  | To: CAP FurnishChargingInformation  |
|--|---|
| callSessionID  |   |
| callChargePlan<br>ChargeOrderType<br>TransparentCharge<br>ChargePlan<br>AdditionalInfo | FCIBillingChargingCharacteristics<br>fCIBCCCAMELsequence1<br>freeFormatData       |
| callChargePlan<br>PartyToCharge  | FCIBillingChargingCharacteristics<br>fCIBCCCAMELsequence1<br>partyToCharge        |
|  | FCIBillingChargingCharacteristics<br>fCIBCCCAMELsequence1<br>appendFreeFormatData |

An alternative scenario would be to map *setCallChargePlan* method to the CAP *ApplyCharging* protocol operation.

### 4.2.14 callFaultDetected

*callFaultDetected* indicates to the application that a fault has been detected in the call.

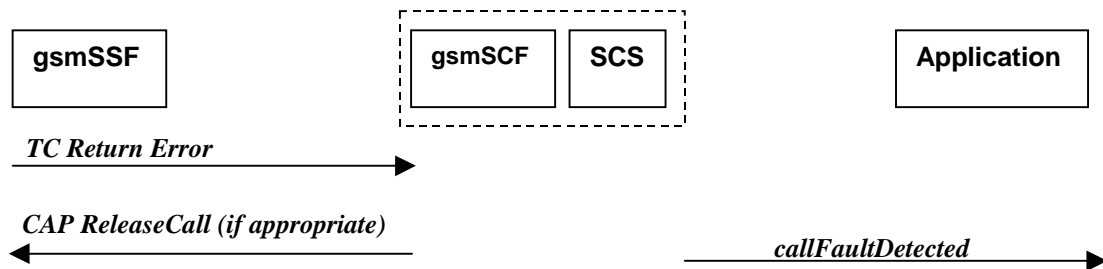

**Figure 4-23: Call Flow for callFaultDetected**

**Table 4-52: Normal Operation**

| Pre-conditions | A call exists and the SCS detects an error. No <i>routeReq</i> method has been invoked yet  |
|----------------|---|
| 1              | The gsmSSF may detect a fault and sends an appropriate dialogue error message to the gsmSCF |
| 2              | The gsmSCF may detect a fault and send an error message to the SCS                          |
| 3              | The SCS detects a fault and invokes the <i>callFaultDetected</i> method                     |
| 4              | The SCS sends an equivalent message to the gsmSCF if appropriate                            |
| 5              | The gsmSCF sends a CAP <i>ReleaseCall</i> if appropriate                                    |

**Table 4-53: Parameter Mapping**

| From: Dialogue Error | To: callFaultDetected |
|----------------------|-----------------------|
|                      | callSessionID         |
| TC_U_ABORT           | fault                 |

### 4.2.15 callEnded

*callEnded* will be invoked when the call has ended. Furthermore, the operation contains an indication on the reason why the call has been ended. Also the operation will always be invoked when the call has ended and not only when the application has requested its interest in this event.

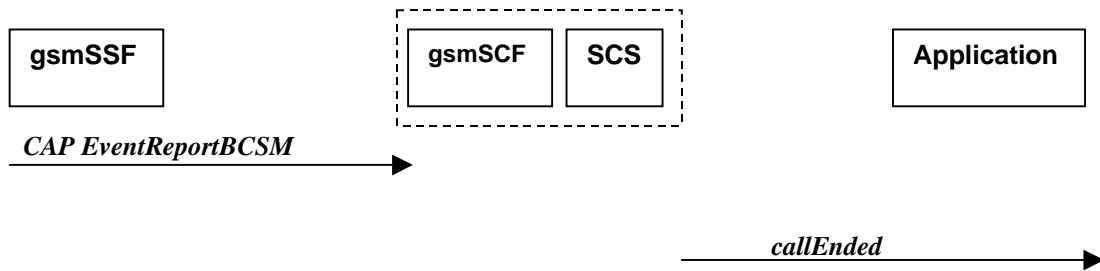


Figure 4-24: Call Flow for callEnded

Table 4-54: Normal Operation

| Pre-conditions | There is an application monitoring the call in some way   |
|----------------|---|
| 1              | The gsmSSF detects a release from the calling or called party leg. CAP eventReportBCSM is sent if requested by the gsmSCF. The BCSM event indicated may be either abandon or disconnect depending on the phase of the call. |
| 2              | The gsmSCF sends an equivalent message to the SCS.  |
| 3              | The SCS invokes the <b>callEnded</b> method.  |

Table 4-55: Parameter Mapping

| From: CAP EventReportBCSM                     | To: callEnded    |
|---|------------------|
|   | callSessionID    |
| eventTypeBCSM                                 |                  |
|   | report           |
| legID   | callLegSessionID |
| eventSpecificInformationBCSM:<br>releaseCause | cause            |
| miscCallInfo                                  |                  |

## 5 Detailed Parameter Mappings

This clause contains detailed parameter mappings for data types that are used in the Parameter Mapping tables in the previous clauses.

### 5.1 TpCallMonitorMode

Table 5-1

| TpCallMonotirMode                  | monitorMode       |
|------------------------------------|-------------------|
| P_CALL_MONITOR_MODE_INTERRUPT      | interrupted       |
| P_CALL_MONITOR_MODE_NOTIFY         | notifyAndContinue |
| P_CALL_MONITOR_MODE_DO_NOT_MONITOR | transparent       |

## 5.2 TpCallReportType

Table 5-2

| <b>TpCallReportType</b>       | <b>eventTypeBCSM</b>      |
|-------------------------------|---------------------------|
| P_CALL_REPORT_UNDEFINED       | analyzedInformation       |
| P_CALL_REPORT_PROGRESS        | <no mapping available>    |
| P_CALL_REPORT_ALERTING        | <no mapping available>    |
| P_CALL_REPORT_ANSWER          | oAnswer<br>tAnswer        |
| P_CALL_REPORT_REFUSED_BUSY    | oCalledPartyBusy<br>tBusy |
| P_CALL_REPORT_NO_ANSWER       | oNoAnswer<br>tNoAnswer    |
| P_CALL_REPORT_DISCONNECT      | tDisconnect               |
| P_CALL_REPORT_REDIRECTED      | <no mapping available>    |
| P_CALL_REPORT_SERVICE_CODE    | <no mapping available>    |
| P_CALL_REPORT_ROUTING_FAILURE | routeSelectFailure        |

## 5.3 TpCallEventName

Table 5-3

| <b>TpCallEventName</b>                   | <b>eventTypeBCSM</b>  |
|--|---|
| P_EVENT_NAME_UNDEFINED                   | <no mapping available>  |
| P_EVENT_GCCS_OFFHOOK_EVENT               | <no mapping available>  |
| P_EVENT_GCCS_ADDRESS_COLLECTED_EVENT     | O-CSI (see note)<br>O-BcsmTriggerDetectionPoint:<br>collectedInfo<br>T-CSI/VT-CSI:<br>T-BcsmTriggerDetectionPoint:<br>termAttemptAuthorized     |
| P_EVENT_GCCS_ADDRESS_ANALYSED_EVENT      | O-CSI<br>O-BcsmTriggerDetectionPoint<br>analysedInfo  |
| P_EVENT_GCCS_CALLED_PARTY_BUSY           | T-CSI/VT-CSI:<br>T-BcsmTriggerDetectionPoint:<br>tBusy  |
| P_EVENT_GCCS_CALLED_PARTY_UNREACHABLE    | mapped to the cause value returned with TBusy :<br>T-CSI/VT-CSI:<br>T-BcsmTriggerDetectionPoint:<br>tBusy                                       |
| P_EVENT_GCCS_NO_ANSWER_FROM_CALLED_PARTY | T-CSI/VT-CSI:<br>T-BcsmTriggerDetectionPoint:<br>tNoAnswer  |
| P_EVENT_GCCS_ROUTE_SELECT_FAILURE        | O-CSI:<br>O-BcsmTriggerDetectionPoint:<br>routeSelectFailure  |
| P_EVENT_GCCS_ANSWER_FROM_CALL_PARTY      | T-CSI/VT-CSI:<br>T-BcsmTriggerDetectionPoint:<br>tAnswer  |
| NOTE:                                    | O-CSI applies when the value for CallNotificationType is P_ORIGINATING, T-CSI applies when the value for CallNotificationType is P_TERMINATING. |

## 5.4 TpCallAdditionalReportInfo

Table 5-4

| TpCallAdditionalReportInfo | eventSpecificInformationBCSM   |
|----------------------------|--|
| RefusedBusy                | oCalledPartyBusy<br>busyCause<br><br>or<br><br>tBusySpecificInfo<br>busyCause<br>callForwarded (no mapping)  |
| CallDisconnect             | oDisconnectSpecificInfo<br>- releaseCause<br>tDisconnectSpecificInfo<br>- releaseCause   |
| ForwardAddress             | oAnswerSpecificInfo<br>- destinationAddress; or<br>- Call (no mapping);<br>- forwardedCall (no mapping).<br>tAnswerSpecificInfo<br>- destinationAddress; or<br>- Call (no mapping);<br>- forwardedCall (no mapping). |
| ServiceCode                | <no mapping available>   |
| RoutingFailure             | routeSelectFailureSpecificInfo<br>- failureCause   |
|                            | tNoAnswerSpecificInfo<br>- callForwarded   |



## Annex A: Change history

| Change history |       |           |     |     |   |       |       |
|----------------|-------|-----------|-----|-----|---|-------|-------|
| Date           | TSG # | TSG Doc.  | CR  | Rev | Subject/Comment   | Old   | New   |
| Mar 2001       | CN_11 | NP-010131 | 011 | --  | CR 29.998: for moving TR 29.998 from R99 to Rel 4 (N5-010159)   | 3.2.0 | 4.0.0 |
| Jun 2001       | CN_12 | NP-010371 | 001 | --  | Missing description of "setCallLoadControl mapping to CAP" (N5-010432)  | 4.0.0 | 4.1.0 |
| Sep 2001       | CN_13 | NP-010474 | 002 | --  | Updates and corrections to data mapping to CAP  | 4.1.0 | 4.2.0 |
| Jun 2002       | CN_16 | --        | --  | --  | Automatically upgraded to Rel-5 (i.e. no change/CR). The overview of the enlarged 29.198/29.998-family was updated in the Introduction. | 4.0.0 | 5.0.0 |
| Dec 2004       | CN_26 | --        | --  | --  | Automatically upgraded to Rel-6 (i.e. no change/CR). The overview of the enlarged 29.198/29.998-family was updated in the Introduction. | 5.0.0 | 6.0.0 |
| Mar 2007       | CT_35 | --        | --  | --  | Automatic upgrade to R7 (no CR needed)  | 6.0.0 | 7.0.0 |
| Dec 2008       | CT_42 | --        | --  | --  | Upgraded unchanged from Rel-7   | 7.0.0 | 8.0.0 |
| 2009-12        | -     | -         | -   | -   | Update to Rel-9 version (MCC)   | 8.0.0 | 9.0.0 |

---

## History

| <b>Document history</b> |              |             |
|-------------------------|--------------|-------------|
| V9.0.0                  | January 2010 | Publication |
|                         |              |             |
|                         |              |             |
|                         |              |             |
|                         |              |             |