

Final draft **ETSI EN 300 175-5** V1.8.0 (2004-07)

European Standard (Telecommunications series)

**Digital Enhanced Cordless Telecommunications (DECT);
Common Interface (CI);
Part 5: Network (NWK) layer**



Reference

REN/DECT-000215-5

Keywords

DECT, radio

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, send your comment to:

editor@etsi.org

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2004.
All rights reserved.

DECT™, **PLUGTESTS™** and **UMTS™** are Trade Marks of ETSI registered for the benefit of its Members.
TIPHON™ and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Contents

| | |
|---|----|
| Intellectual Property Rights | 15 |
| Foreword..... | 15 |
| 1 Scope | 16 |
| 2 References | 16 |
| 3 Definitions and abbreviations..... | 20 |
| 3.1 Definitions | 20 |
| 3.2 Abbreviations | 22 |
| 4 Overview of the NWK layer | 25 |
| 5 Overview of procedures | 27 |
| 5.1 General | 27 |
| 5.2 Overview of Call Control (CC)..... | 27 |
| 5.2.1 General..... | 27 |
| 5.2.2 Call establishment..... | 27 |
| 5.2.2.1 Call setup | 27 |
| 5.2.2.2 Service negotiation..... | 28 |
| 5.2.3 Call connect | 28 |
| 5.2.4 Call information | 28 |
| 5.2.5 Service change | 29 |
| 5.2.6 Call release..... | 29 |
| 5.3 Overview of Supplementary Services (SS) | 29 |
| 5.3.1 General..... | 29 |
| 5.3.2 Keypad protocol..... | 30 |
| 5.3.3 Feature key management protocol | 30 |
| 5.3.4 Functional protocol | 30 |
| 5.4 Overview of Connection Oriented Message Service (COMS)..... | 30 |
| 5.4.1 General..... | 30 |
| 5.4.2 COMS establishment | 31 |
| 5.4.3 Service negotiation | 31 |
| 5.4.4 COMS connect..... | 31 |
| 5.4.5 COMS data transfer | 31 |
| 5.4.6 COMS suspend and resume | 31 |
| 5.4.7 COMS release | 32 |
| 5.5 Overview of ConnectionLess Message Service (CLMS) | 32 |
| 5.5.1 Fixed length message service..... | 32 |
| 5.5.2 Variable length message service | 32 |
| 5.6 Overview of Mobility Management (MM) | 32 |
| 5.6.1 General..... | 32 |
| 5.6.2 Identity procedures | 33 |
| 5.6.3 Authentication procedures | 33 |
| 5.6.4 Location procedures..... | 34 |
| 5.6.5 Access rights procedures | 34 |
| 5.6.6 Key allocation procedure | 34 |
| 5.6.7 Parameter retrieval procedure | 34 |
| 5.6.8 Ciphering related procedure..... | 35 |
| 5.6.9 External protocol information procedure | 35 |
| 5.7 Overview of Link Control Entity (LCE) | 35 |
| 5.7.1 General..... | 35 |
| 5.7.2 Data Link Endpoint Identifier (DLEI) | 35 |
| 5.7.3 Data link establishment..... | 36 |
| 5.7.4 Data link re-establishment | 36 |
| 5.7.5 Data link release | 36 |
| 5.7.6 Data link suspend and resume..... | 36 |
| 5.7.7 Queuing of messages | 37 |

| | | |
|----------|--|----|
| 5.7.8 | Request paging..... | 37 |
| 6 | Message functional definitions..... | 37 |
| 6.1 | Overview of message structures..... | 37 |
| 6.1.1 | Messages..... | 37 |
| 6.1.2 | Information elements..... | 38 |
| 6.2 | Message summaries..... | 38 |
| 6.2.1 | Summary of CC messages..... | 38 |
| 6.2.2 | Summary of CISS messages..... | 39 |
| 6.2.3 | Summary of COMS messages..... | 39 |
| 6.2.4 | Summary of CLMS messages..... | 39 |
| 6.2.5 | Summary of MM messages..... | 40 |
| 6.2.6 | Summary of LCE messages..... | 40 |
| 6.3 | S-FORMAT message functional contents..... | 41 |
| 6.3.1 | S-FORMAT message overview..... | 41 |
| 6.3.2 | CC-messages..... | 42 |
| 6.3.2.1 | {CC-SETUP}..... | 42 |
| 6.3.2.2 | {CC-INFO}..... | 44 |
| 6.3.2.3 | {CC-SETUP-ACK}..... | 45 |
| 6.3.2.4 | {CC-CALL-PROC}..... | 46 |
| 6.3.2.5 | {CC-ALERTING}..... | 47 |
| 6.3.2.6 | {CC-CONNECT}..... | 48 |
| 6.3.2.7 | {CC-CONNECT-ACK}..... | 49 |
| 6.3.2.8 | {CC-RELEASE}..... | 49 |
| 6.3.2.9 | {CC-RELEASE-COM}..... | 50 |
| 6.3.2.10 | {CC-SERVICE-CHANGE}..... | 51 |
| 6.3.2.11 | {CC-SERVICE-ACCEPT}..... | 51 |
| 6.3.2.12 | {CC-SERVICE-REJECT}..... | 52 |
| 6.3.2.13 | {CC-NOTIFY}..... | 53 |
| 6.3.2.14 | {IWU-INFO}..... | 53 |
| 6.3.3 | SS-messages (call related and call independent)..... | 54 |
| 6.3.3.1 | {FACILITY}..... | 54 |
| 6.3.3.2 | {HOLD}..... | 54 |
| 6.3.3.3 | {HOLD-ACK}..... | 55 |
| 6.3.3.4 | {HOLD-REJECT}..... | 55 |
| 6.3.3.5 | {RETRIEVE}..... | 55 |
| 6.3.3.6 | {RETRIEVE-ACK}..... | 56 |
| 6.3.3.7 | {RETRIEVE-REJECT}..... | 56 |
| 6.3.3.8 | {CISS-REGISTER}..... | 57 |
| 6.3.3.9 | {CISS-RELEASE-COM}..... | 57 |
| 6.3.4 | COMS-messages..... | 58 |
| 6.3.4.1 | {COMS-SETUP}..... | 58 |
| 6.3.4.2 | {COMS-INFO}..... | 58 |
| 6.3.4.3 | {COMS-ACK}..... | 59 |
| 6.3.4.4 | {COMS-CONNECT}..... | 59 |
| 6.3.4.5 | {COMS-RELEASE}..... | 59 |
| 6.3.4.6 | {COMS-RELEASE-COM}..... | 60 |
| 6.3.4.7 | {COMS-NOTIFY}..... | 60 |
| 6.3.5 | CLMS-message..... | 61 |
| 6.3.5.1 | {CLMS-VARIABLE}..... | 61 |
| 6.3.6 | MM-messages..... | 62 |
| 6.3.6.1 | {ACCESS-RIGHTS-ACCEPT}..... | 62 |
| 6.3.6.2 | {ACCESS-RIGHTS-REJECT}..... | 62 |
| 6.3.6.3 | {ACCESS-RIGHTS-REQUEST}..... | 63 |
| 6.3.6.4 | {ACCESS-RIGHTS-TERMINATE-ACCEPT}..... | 63 |
| 6.3.6.5 | {ACCESS-RIGHTS-TERMINATE-REJECT}..... | 64 |
| 6.3.6.6 | {ACCESS-RIGHTS-TERMINATE-REQUEST}..... | 64 |
| 6.3.6.7 | {AUTHENTICATION-REJECT}..... | 65 |
| 6.3.6.8 | {AUTHENTICATION-REPLY}..... | 65 |
| 6.3.6.9 | {AUTHENTICATION-REQUEST}..... | 66 |
| 6.3.6.10 | {CIPHER-REJECT}..... | 66 |
| 6.3.6.11 | {CIPHER-REQUEST}..... | 67 |

| | | |
|----------|--|-----|
| 6.3.6.12 | {CIPHER-SUGGEST} | 67 |
| 6.3.6.13 | {DETACH} | 68 |
| 6.3.6.14 | {IDENTITY-REPLY} | 69 |
| 6.3.6.15 | {IDENTITY-REQUEST} | 69 |
| 6.3.6.16 | {KEY-ALLOCATE} | 70 |
| 6.3.6.17 | {LOCATE-ACCEPT} | 70 |
| 6.3.6.18 | {LOCATE-REJECT} | 71 |
| 6.3.6.19 | {LOCATE-REQUEST} | 71 |
| 6.3.6.20 | {MM-INFO-ACCEPT} | 72 |
| 6.3.6.21 | {MM-INFO-REJECT} | 72 |
| 6.3.6.22 | {MM-INFO-REQUEST} | 73 |
| 6.3.6.23 | {MM-INFO-SUGGEST} | 74 |
| 6.3.6.24 | {TEMPORARY-IDENTITY-ASSIGN} | 74 |
| 6.3.6.25 | {TEMPORARY-IDENTITY-ASSIGN-ACK} | 75 |
| 6.3.6.26 | {TEMPORARY-IDENTITY-ASSIGN-REJ} | 75 |
| 6.3.6.27 | {MM-IWU} | 76 |
| 6.3.6.28 | {MM-NOTIFY} | 76 |
| 6.3.7 | LCE-messages | 77 |
| 6.3.7.1 | {LCE-PAGE-RESPONSE} | 77 |
| 6.3.7.2 | {LCE-PAGE-REJECT} | 77 |
| 6.4 | B-FORMAT message functional contents | 78 |
| 6.4.1 | B-FORMAT message overview | 78 |
| 6.4.2 | {LCE-REQUEST-PAGE} | 78 |
| 6.4.3 | {CLMS-FIXED} | 79 |
| 7 | S-FORMAT message structures | 79 |
| 7.1 | Overview | 79 |
| 7.2 | Protocol Discrimination (PD) element | 80 |
| 7.3 | Transaction Identifier (TI) element | 80 |
| 7.4 | Message type element | 81 |
| 7.4.1 | Messages for CC | 82 |
| 7.4.2 | Messages for SS | 82 |
| 7.4.3 | Messages for COMS | 82 |
| 7.4.4 | Messages for CLMS | 83 |
| 7.4.5 | Messages for MM | 83 |
| 7.4.6 | Messages for LCE | 83 |
| 7.5 | Other information elements | 84 |
| 7.5.1 | Coding rules | 84 |
| 7.5.2 | Extensions of codesets | 86 |
| 7.5.3 | Locking shift procedure | 86 |
| 7.5.4 | Non-locking shift procedure | 87 |
| 7.5.5 | Display and keypad elements | 87 |
| 7.5.6 | Repeated elements | 87 |
| 7.6 | Fixed length information elements | 88 |
| 7.6.1 | Summary | 88 |
| 7.6.2 | Sending complete, delimiter request and use TPUI | 88 |
| 7.6.3 | Repeat indicator | 89 |
| 7.6.4 | Basic service | 89 |
| 7.6.5 | Single display | 90 |
| 7.6.6 | Single keypad | 90 |
| 7.6.7 | Release reason | 90 |
| 7.6.8 | Signal | 91 |
| 7.6.9 | Timer restart | 92 |
| 7.6.10 | Test hook control | 93 |
| 7.7 | Variable length information elements | 93 |
| 7.7.1 | Summary | 93 |
| 7.7.2 | Allocation type | 95 |
| 7.7.3 | Alphanumeric | 96 |
| 7.7.4 | Auth type | 97 |
| 7.7.5 | Call attributes | 98 |
| 7.7.6 | Call identity | 100 |
| 7.7.7 | Called party number | 101 |

| | | |
|---------|---|------------|
| 7.7.8 | Called party subaddress | 102 |
| 7.7.9 | Calling party number | 102 |
| 7.7.10 | Cipher info | 103 |
| 7.7.11 | Connection attributes | 104 |
| 7.7.12 | Connection identity | 107 |
| 7.7.13 | Duration | 108 |
| 7.7.14 | End-to-end compatibility | 109 |
| 7.7.15 | Facility | 112 |
| 7.7.16 | Feature activate | 112 |
| 7.7.17 | Feature indicate | 114 |
| 7.7.18 | Fixed identity | 116 |
| 7.7.19 | Identity type | 117 |
| 7.7.20 | Info type | 118 |
| 7.7.21 | InterWorking Unit (IWU) attributes | 119 |
| 7.7.22 | IWU packet | 124 |
| 7.7.23 | IWU to IWU | 125 |
| 7.7.24 | Key | 127 |
| 7.7.25 | Location area | 127 |
| 7.7.26 | Multi-display | 128 |
| 7.7.27 | Multi-keypad | 129 |
| 7.7.28 | NetWorK (NWK) assigned identity | 129 |
| 7.7.29 | Network parameter | 130 |
| 7.7.30 | Portable identity | 131 |
| 7.7.31 | Progress indicator | 135 |
| 7.7.32 | RAND | 136 |
| 7.7.33 | Rate parameters | 136 |
| 7.7.34 | Reject reason | 137 |
| 7.7.35 | RES | 138 |
| 7.7.36 | RS | 139 |
| 7.7.37 | Segmented info | 139 |
| 7.7.38 | Service change info | 140 |
| 7.7.39 | Service class | 141 |
| 7.7.40 | Setup capability | 142 |
| 7.7.41 | Terminal capability | 143 |
| 7.7.42 | Transit delay | 147 |
| 7.7.43 | Window size | 148 |
| 7.7.44 | ZAP field | 148 |
| 7.7.45 | Escape to proprietary | 149 |
| 7.7.46 | Model identifier | 149 |
| 7.7.47 | MMS Generic Header | 150 |
| 7.7.48 | MMS Object Header | 150 |
| 7.7.49 | MMS Extended header | 151 |
| 7.7.50 | Time-Date | 151 |
| 7.7.51 | Ext h/o indicator | 152 |
| 7.7.52 | Authentication Reject Parameter | 153 |
| 8 | B-FORMAT message structures | 153 |
| 8.1 | General | 153 |
| 8.2 | LCE request paging messages | 154 |
| 8.2.1 | Short format message | 155 |
| 8.2.2 | Long format message | 157 |
| 8.3 | CLMS-FIXED messages | 159 |
| 8.3.1 | General message structure | 159 |
| 8.3.2 | Message elements | 160 |
| 8.3.3 | Standard message structures | 161 |
| 8.3.3.1 | General | 161 |
| 8.3.3.2 | Messages using 4-bit characters | 162 |
| 8.3.3.3 | Messages using 8-bit characters | 162 |
| 9 | Call Control (CC) procedures | 162 |
| 9.1 | General | 162 |
| 9.2 | Call Control (CC) states | 165 |

| | | |
|----------|--|-----|
| 9.2.1 | States at PT | 165 |
| 9.2.1.1 | State T-00: "NULL" | 165 |
| 9.2.1.2 | State T-19: "RELEASE PENDING" | 165 |
| 9.2.1.3 | State T-10: "ACTIVE" | 165 |
| 9.2.1.4 | State T-01: "CALL INITIATED" | 165 |
| 9.2.1.5 | State T-02: "OVERLAP SENDING" | 165 |
| 9.2.1.6 | State T-03: "CALL PROCEEDING" | 165 |
| 9.2.1.7 | State T-04: "CALL DELIVERED" | 165 |
| 9.2.1.8 | State T-06: "CALL PRESENT" | 165 |
| 9.2.1.9 | State T-07: "CALL RECEIVED" | 165 |
| 9.2.1.10 | State T-08: "CONNECT PENDING" | 165 |
| 9.2.2 | States at FT | 166 |
| 9.2.2.1 | State F-00: "NULL" | 166 |
| 9.2.2.2 | State F-19: "RELEASE PENDING" | 166 |
| 9.2.2.3 | State F-10: "ACTIVE" | 166 |
| 9.2.2.4 | State F-01: "CALL-INITIATED" | 166 |
| 9.2.2.5 | State F-02: "OVERLAP SENDING" | 166 |
| 9.2.2.6 | State F-03: "CALL PROCEEDING" | 166 |
| 9.2.2.7 | State F-04: "CALL DELIVERED" | 166 |
| 9.2.2.8 | State F-06: "CALL PRESENT" | 166 |
| 9.2.2.9 | State F-07: "CALL RECEIVED" | 166 |
| 9.2.3 | Optional states (PT and FT)..... | 167 |
| 9.2.3.1 | States T-22 and F-22: "OVERLAP RECEIVING" | 167 |
| 9.2.3.2 | States T-23 and F-23: "INCOMING CALL PROCEEDING" | 167 |
| 9.3 | Call establishment procedures..... | 167 |
| 9.3.1 | PT initiated call establishment (outgoing call)..... | 167 |
| 9.3.1.1 | Call request | 167 |
| 9.3.1.2 | Call accept or reject..... | 168 |
| 9.3.1.3 | Selection of lower layer resources | 168 |
| 9.3.1.4 | Connection of U-plane | 169 |
| 9.3.1.5 | Overlap sending | 169 |
| 9.3.1.6 | Call proceeding | 170 |
| 9.3.1.7 | Call confirmation | 170 |
| 9.3.1.8 | Call connection | 171 |
| 9.3.1.9 | Expiry of timer <CC.04> | 171 |
| 9.3.2 | FT initiated call establishment (incoming call)..... | 171 |
| 9.3.2.1 | Call request | 171 |
| 9.3.2.2 | Call accept or reject..... | 172 |
| 9.3.2.3 | Selection of lower layer resources | 172 |
| 9.3.2.4 | Connection of U-plane | 173 |
| 9.3.2.5 | Overlap receiving | 173 |
| 9.3.2.6 | Call proceeding | 173 |
| 9.3.2.7 | Call confirmation | 173 |
| 9.3.2.8 | Call connection | 173 |
| 9.3.2.9 | Sending of <<TERMINAL-CAPABILITY>> | 174 |
| 9.3.2.10 | Expiry of timer <CC.04> | 174 |
| 9.4 | Call information procedures | 174 |
| 9.5 | Call release procedures..... | 174 |
| 9.5.1 | Normal call release | 174 |
| 9.5.2 | Abnormal call release | 175 |
| 9.5.3 | Release collisions..... | 176 |
| 9.6 | Service change procedures | 176 |
| 9.6.1 | General..... | 176 |
| 9.6.2 | Bandwidth changes (including reversals) | 177 |
| 9.6.3 | Service rerouting..... | 177 |
| 9.6.4 | Service suspension and resumption | 177 |
| 9.6.5 | Modulation scheme change..... | 178 |
| 9.7 | Packet mode procedures..... | 178 |
| 9.7.1 | General..... | 178 |
| 9.7.2 | PT initiated access | 178 |
| 9.7.3 | FT initiated access | 179 |
| 9.7.4 | Packet mode suspend and resume..... | 179 |

| | | |
|----------|---|-----|
| 9.7.4.1 | General | 179 |
| 9.7.4.2 | C-plane suspend and resume | 179 |
| 9.7.4.3 | U-plane suspend and resume | 179 |
| 9.8 | Emergency call procedure | 180 |
| 9.9 | Segmentation of information in CC procedures | 181 |
| 10 | Supplementary Services procedures | 182 |
| 10.1 | General | 182 |
| 10.2 | Keypad protocol | 182 |
| 10.3 | Feature key management protocol | 183 |
| 10.4 | Functional protocol | 183 |
| 10.4.1 | Separate messages approach | 183 |
| 10.4.1.1 | Hold procedures | 184 |
| 10.4.1.2 | Retrieve procedures | 184 |
| 10.4.1.3 | Auxiliary states for hold and retrieve | 184 |
| 10.4.2 | Common information element approach | 184 |
| 10.4.2.1 | Call related procedures | 185 |
| 10.4.2.2 | Call independent procedures | 185 |
| 10.4.2.3 | Connectionless Supplementary Service (CLSS) procedure | 185 |
| 10.5 | Co-existence of multiple protocols | 186 |
| 10.6 | Application protocols | 186 |
| 10.6.1 | DECT standard functional supplementary services | 186 |
| 10.6.2 | DECT specific supplementary services | 187 |
| 10.6.2.1 | Queue management | 187 |
| 10.6.2.2 | Indication of subscriber number | 188 |
| 10.6.2.3 | Control of echo control functions | 188 |
| 10.6.2.4 | Cost information | 188 |
| 11 | Connection Oriented Message Service (COMS) | 189 |
| 11.1 | General | 189 |
| 11.2 | COMS states | 189 |
| 11.2.1 | States at PT | 189 |
| 11.2.1.1 | State TS-0: "NULL" | 189 |
| 11.2.1.2 | State TS-1: "CONNECT PENDING" | 189 |
| 11.2.1.3 | State TS-2: "RELEASE PENDING" | 189 |
| 11.2.1.4 | State TS-3: "ACTIVE" | 189 |
| 11.2.2 | States at FT | 189 |
| 11.2.2.1 | State FS-0: "NULL" | 189 |
| 11.2.2.2 | State FS-1: "CONNECT PENDING" | 189 |
| 11.2.2.3 | State FS-2: "RELEASE PENDING" | 189 |
| 11.2.2.4 | State FS-3: "ACTIVE" | 190 |
| 11.3 | COMS establishment procedures | 190 |
| 11.3.1 | PT initiated COMS establishment | 190 |
| 11.3.1.1 | COMS request | 190 |
| 11.3.1.2 | COMS connection | 190 |
| 11.3.2 | FT initiated COMS establishment | 191 |
| 11.3.2.1 | COMS request | 191 |
| 11.3.2.2 | COMS connection | 191 |
| 11.4 | COMS data transfer procedures | 191 |
| 11.4.1 | Procedure at the sending side | 191 |
| 11.4.2 | Procedure at the receiving side | 192 |
| 11.5 | COMS suspend and resume procedures | 193 |
| 11.6 | COMS release procedures | 193 |
| 11.6.1 | Normal COMS release | 193 |
| 11.6.2 | Release collisions | 193 |
| 12 | ConnectionLess Message Service (CLMS) | 194 |
| 12.1 | General | 194 |
| 12.2 | CLMS states | 194 |
| 12.3 | CLMS message transmission procedures | 194 |
| 12.3.1 | Fixed length messages | 194 |
| 12.3.1.1 | Procedure in the Fixed radio Termination (FT) | 194 |
| 12.3.1.2 | Procedure in the Portable radio Termination (PT) | 195 |

| | | |
|----------|--|-----|
| 12.3.2 | Variable length messages..... | 195 |
| 12.3.2.1 | Procedure at the sending side..... | 195 |
| 12.3.2.2 | Procedure at the receiving side..... | 195 |
| 12.3.2.3 | Restrictions for portable side initiated messages..... | 196 |
| 13 | Mobility Management (MM) procedures..... | 196 |
| 13.1 | General..... | 196 |
| 13.2 | Identity procedures..... | 197 |
| 13.2.1 | Procedure for identification of PT..... | 197 |
| 13.2.2 | Procedure for temporary identity assignment..... | 198 |
| 13.3 | Authentication procedures..... | 199 |
| 13.3.1 | Authentication of a PT..... | 199 |
| 13.3.2 | Authentication of the user..... | 201 |
| 13.3.3 | Authentication of a FT..... | 201 |
| 13.4 | Location procedures..... | 202 |
| 13.4.1 | Location registration..... | 202 |
| 13.4.2 | Detach..... | 204 |
| 13.4.3 | Location update..... | 204 |
| 13.5 | Access rights procedure..... | 205 |
| 13.5.1 | Obtaining the access rights..... | 205 |
| 13.5.2 | Termination of access rights..... | 206 |
| 13.5.3 | Modification of access rights..... | 207 |
| 13.6 | Key allocation procedure..... | 208 |
| 13.7 | Parameter retrieval procedure..... | 209 |
| 13.8 | Ciphering related procedure..... | 210 |
| 13.9 | External protocol information procedure..... | 213 |
| 13.9.1 | Procedure for external protocol information initiated by the FT..... | 213 |
| 13.9.2 | Procedure for external protocol information initiated by the PT..... | 213 |
| 13.9.3 | Segmentation of information in MM procedures..... | 213 |
| 14 | Link Control Entity (LCE) procedures..... | 215 |
| 14.1 | General..... | 215 |
| 14.2 | Connection oriented link control procedures..... | 215 |
| 14.2.1 | Link establishment..... | 215 |
| 14.2.2 | Direct PT initiated link establishment..... | 216 |
| 14.2.3 | Indirect (paged) FT initiated link establishment..... | 216 |
| 14.2.4 | Direct FT initiated link establishment..... | 218 |
| 14.2.5 | Link maintenance..... | 218 |
| 14.2.6 | Link suspend and resume..... | 219 |
| 14.2.6.1 | Link suspend..... | 219 |
| 14.2.6.2 | Link resume..... | 219 |
| 14.2.7 | Link release..... | 220 |
| 14.2.7.1 | NLR notification without "partial release" as release reason..... | 220 |
| 14.2.7.2 | NLR notification with "partial release" as release reason..... | 220 |
| 14.3 | Connectionless link control procedures..... | 221 |
| 14.3.1 | Message routing..... | 221 |
| 14.3.2 | Broadcast announce procedure..... | 221 |
| 14.4 | Procedure for collective and group ringing..... | 221 |
| 14.5 | Resume paging..... | 223 |
| 15 | Management procedures..... | 223 |
| 15.1 | Lower Layer Management Entity (LLME)..... | 223 |
| 15.2 | Service mapping and negotiation..... | 224 |
| 15.2.1 | General..... | 224 |
| 15.2.2 | Prioritized list negotiation..... | 224 |
| 15.2.3 | Exchanged attribute negotiation..... | 224 |
| 15.2.4 | Operating parameter negotiation..... | 225 |
| 15.2.5 | Peer attribute negotiation..... | 225 |
| 15.3 | Service modification procedures..... | 226 |
| 15.4 | Resource management..... | 226 |
| 15.5 | Management of MM procedures..... | 226 |
| 15.6 | Call ciphering management..... | 227 |
| 15.7 | External Handover..... | 228 |

| | | |
|-----------|--|-----|
| 15.7.1 | Handover candidate procedures | 228 |
| 15.7.1.1 | General | 228 |
| 15.7.1.2 | Handover candidate indication | 228 |
| 15.7.1.3 | Handover candidate retrieval | 229 |
| 15.7.1.4 | Target FP selection..... | 229 |
| 15.7.2 | Handover reference procedure..... | 230 |
| 15.7.2.1 | General | 230 |
| 15.7.2.2 | Handover reference indication | 230 |
| 15.7.2.3 | Handover reference retrieval | 230 |
| 15.7.3 | External handover suggested by FP | 230 |
| 15.7.4 | NWK layer set up procedure..... | 231 |
| 15.7.4.1 | Handover request | 231 |
| 15.7.4.2 | Handover confirm | 231 |
| 15.7.4.3 | Handover accept..... | 231 |
| 15.7.4.4 | Handover reject | 231 |
| 15.7.4.5 | Release of old connection | 231 |
| 15.7.4.6 | Handover Fall Back..... | 232 |
| 15.7.5 | U-plane handling | 232 |
| 15.7.6 | Ciphering procedure | 233 |
| 15.7.7 | Interaction with location registration | 233 |
| 15.8 | Test management procedures | 233 |
| 15.8.1 | Test call back procedure | 234 |
| 15.8.2 | Test hook control procedures..... | 234 |
| 15.8.3 | Upper tester procedure..... | 234 |
| 15.9 | Application assistance procedures..... | 235 |
| 15.9.1 | DECT Identity Resolution (Retrieval) Procedure | 235 |
| 15.9.1.1 | FT (or HyP) initiated Connectionless Identity Resolution procedure | 235 |
| 15.9.1.2 | PT initiated Connectionless Identity Resolution procedure | 235 |
| 15.9.1.3 | Connection oriented Identity Resolution procedure..... | 236 |
| 15.9.2 | Application Address Resolution (Retrieval) Procedure..... | 236 |
| 15.9.3 | Application Parameter Allocation Procedure..... | 236 |
| 15.9.3.1 | FT initiated application parameter allocation procedure..... | 236 |
| 15.9.3.2 | PT initiated application parameter allocation procedure..... | 237 |
| 15.9.4 | Application parameter information procedure..... | 237 |
| 15.9.4.1 | FT initiated connection oriented Application parameter information procedure | 237 |
| 15.9.4.2 | PT initiated connection oriented Application parameter information procedure | 237 |
| 15.9.4.3 | FT initiated connectionless Application parameter information procedure | 238 |
| 15.9.4.4 | PT initiated connectionless Application parameter information procedure | 238 |
| 15.9.5 | Application Parameter Indication procedure | 238 |
| 16 | Primitives | 239 |
| 16.1 | Primitive types..... | 239 |
| 16.2 | Primitives to lower layer (DLC layer)..... | 239 |
| 16.3 | Primitives to IWU | 239 |
| 16.3.1 | Parameter definitions | 239 |
| 16.3.2 | MNCC primitives | 240 |
| 16.3.2.1 | MNCC_SETUP primitive | 241 |
| 16.3.2.2 | MNCC_SETUP_ACK primitive..... | 241 |
| 16.3.2.3 | MNCC_REJECT primitive | 242 |
| 16.3.2.4 | MNCC_CALL_PROC primitive..... | 242 |
| 16.3.2.5 | MNCC_ALERT primitive | 243 |
| 16.3.2.6 | MNCC_CONNECT primitive..... | 243 |
| 16.3.2.7 | MNCC_RELEASE primitive | 244 |
| 16.3.2.8 | MNCC_FACILITY primitive | 244 |
| 16.3.2.9 | MNCC_INFO primitive | 245 |
| 16.3.2.10 | MNCC_MODIFY primitive..... | 245 |
| 16.3.2.11 | MNCC_HOLD primitive | 245 |
| 16.3.2.12 | MNCC_RETRIEVE primitive | 246 |
| 16.3.2.13 | MNCC_IWU_INFO primitive | 246 |
| 16.3.3 | MNSS primitives | 246 |
| 16.3.3.1 | MNSS_SETUP primitive | 246 |
| 16.3.3.2 | MNSS_FACILITY primitive | 247 |

| | | |
|-----------------------------|---|------------|
| 16.3.3.3 | MNSS_RELEASE primitive..... | 247 |
| 16.3.4 | MNCO primitives | 247 |
| 16.3.4.1 | MNCO_SETUP primitive | 248 |
| 16.3.4.2 | MNCO_CONNECT primitive | 248 |
| 16.3.4.3 | MNCO_INFO primitive..... | 248 |
| 16.3.4.4 | MNCO_ACK primitive..... | 248 |
| 16.3.4.5 | MNCO_RELEASE primitive..... | 249 |
| 16.3.4.6 | MNCO_REJECT primitive..... | 249 |
| 16.3.5 | MNCL primitives..... | 249 |
| 16.3.5.1 | MNCL_UNITDATA primitive | 249 |
| 16.3.6 | MM primitives | 250 |
| 16.3.6.1 | MM_IDENTITY primitive | 250 |
| 16.3.6.2 | MM_IDENTITY_ASSIGN primitive | 250 |
| 16.3.6.3 | MM_AUTHENTICATE primitive | 251 |
| 16.3.6.4 | MM_LOCATE primitive | 251 |
| 16.3.6.5 | MM_DETACH primitive..... | 251 |
| 16.3.6.6 | MM_ACCESS_RIGHTS primitive..... | 252 |
| 16.3.6.7 | MM_ACCESS_RIGHTS_TERMINATE primitive..... | 252 |
| 16.3.6.8 | MM_KEY_ALLOCATE primitive..... | 252 |
| 16.3.6.9 | MM_INFO primitive..... | 253 |
| 16.3.6.10 | MM_CIPHER primitive..... | 253 |
| 16.3.6.11 | MM_IWU primitive | 253 |
| 17 | Handling of error and exception conditions | 254 |
| 17.1 | Protocol discrimination error..... | 254 |
| 17.2 | Message too short..... | 254 |
| 17.3 | Transaction identifier error..... | 254 |
| 17.3.1 | Illegal and unsupported transaction identifier value | 254 |
| 17.3.2 | Transaction identifier procedural errors and exception conditions | 254 |
| 17.3.2.1 | Unknown active CC call | 254 |
| 17.3.2.2 | Unknown active CISS call | 255 |
| 17.3.2.3 | Unknown active COMS call | 255 |
| 17.3.2.4 | Unknown active CLMS call..... | 255 |
| 17.3.2.5 | Unknown active MM transaction..... | 255 |
| 17.3.2.6 | Unknown active LCE transaction | 255 |
| 17.3.3 | Call Resource Contention | 255 |
| 17.4 | Message type or message sequence errors | 256 |
| 17.4.1 | CC message error..... | 256 |
| 17.4.2 | CISS message error..... | 256 |
| 17.4.3 | COMS or CLMS message error..... | 256 |
| 17.4.4 | MM message error..... | 256 |
| 17.4.5 | LCE message error..... | 256 |
| 17.5 | General information element errors..... | 256 |
| 17.5.1 | Information element out of sequence..... | 256 |
| 17.5.2 | Duplicated information elements | 257 |
| 17.6 | Mandatory information element errors..... | 257 |
| 17.6.1 | Mandatory information element missing in CC messages..... | 257 |
| 17.6.2 | Mandatory information element content error in CC messages..... | 257 |
| 17.6.3 | Mandatory information element error in COMS or CLMS messages | 257 |
| 17.6.4 | Mandatory information element error in MM messages..... | 258 |
| 17.6.5 | Mandatory information element error in LCE messages | 258 |
| 17.7 | Non-mandatory information element errors | 258 |
| 17.7.1 | Unrecognized information element..... | 258 |
| 17.7.2 | Non-mandatory information element content error | 258 |
| 17.8 | Data link reset..... | 259 |
| 17.9 | Data link failure..... | 259 |
| Annex A (normative): | System parameters..... | 260 |
| A.1 | CC timers..... | 260 |
| A.2 | SS timers | 261 |

| | | |
|---|--|------------|
| A.3 | COMS timers..... | 261 |
| A.4 | CLMS timer..... | 262 |
| A.5 | MM timers..... | 262 |
| A.6 | LCE timers | 264 |
| A.7 | NWK layer constants..... | 265 |
| A.8 | Restart..... | 265 |
| Annex B (normative): CC state transition tables | | 266 |
| B.1 | CC state transitions at PT side..... | 266 |
| B.1.1 | CC state table at PT side..... | 266 |
| B.1.2 | CC transition procedures at PT side | 267 |
| B.2 | CC state transitions at FT side..... | 269 |
| B.2.1 | CC state table at FT side..... | 269 |
| B.2.2 | CC transition procedures at FT side | 269 |
| Annex C (informative): DLC states as viewed by the LCE | | 272 |
| Annex D (normative): DECT standard character sets | | 273 |
| D.1 | General | 273 |
| D.2 | DECT standard 8-bit characters | 273 |
| D.2.1 | General | 273 |
| D.2.2 | Control codes..... | 274 |
| D.2.3 | Standard IA5 codes | 274 |
| D.2.4 | extended codes and escape to alternative character sets..... | 275 |
| D.3 | DECT standard 4-bit characters | 275 |
| Annex E (normative): Default coding of <<IWU-ATTRIBUTES>> and <<CALL-ATTRIBUTES>> information elements for basic speech..... | | 276 |
| Annex F (normative): Broadcast attributes coding | | 277 |
| F.1 | Higher layer capabilities..... | 277 |
| F.2 | Extended higher layer capabilities | 278 |
| Annex G (normative): Use of <<IWU-PACKET>> and <<IWU-TO-IWU>> information elements | | 279 |
| G.1 | General | 279 |
| G.2 | Sending of <<IWU-PACKET>> elements..... | 279 |
| G.2.1 | CC and MM use of <<IWU-PACKET>> | 279 |
| G.2.2 | COMS and CLMS use of <<IWU-PACKET>>..... | 279 |
| G.2.3 | Rejection of <<IWU-PACKET>> elements | 279 |
| G.3 | Use of <<IWU-TO-IWU>> elements | 280 |
| G.3.1 | Sending of <<IWU-TO-IWU>> elements..... | 280 |
| G.3.2 | Rejection of <<IWU-TO-IWU>> elements | 280 |
| Annex H (normative): Transaction identifier flags (TIF) assignment in MM procedures..... | | 281 |
| H.1 | General | 281 |
| H.2 | Nested procedures | 281 |
| H.3 | Stand alone procedures..... | 282 |
| H.3.1 | Location update procedure | 282 |
| H.3.2 | Location registration procedure with temporary identity assignment | 282 |
| H.3.3 | PT initiated cipher switching..... | 283 |

| | | |
|---|---|------------|
| H.3.4 | Key allocation | 283 |
| H.4 | External protocol information procedure | 284 |
| Annex I (normative): Distributed Communications..... | | 285 |
| I.1 | Introduction | 285 |
| I.2 | General Requirements | 285 |
| I.2.1 | DCDL-net..... | 285 |
| I.2.2 | Subscription..... | 285 |
| I.2.3 | Communication | 286 |
| I.3 | Procedure description | 287 |
| I.3.1 | HyP Identities | 287 |
| I.3.2 | Membership Access Rights Allocation | 287 |
| I.3.3 | Re-initialization of membership access rights | 288 |
| I.3.4 | Members Data Transfer | 288 |
| I.3.5 | Presence/Absence Indication | 290 |
| I.3.6 | Bandwidth management | 290 |
| I.3.7 | Direct Link Establishment | 291 |
| I.3.8 | Indirect Link Establishment | 292 |
| I.3.9 | MASTER management | 293 |
| I.3.9.1 | MASTER assign | 293 |
| I.3.9.2 | MASTER Change | 293 |
| I.3.9.3 | DCDL-net System bearer management | 293 |
| I.3.10 | Common Subscription Database management | 294 |
| I.3.10.1 | IdN | 294 |
| I.3.10.2 | RFPI, PARK and PLI..... | 294 |
| I.3.10.3 | IPUI | 295 |
| I.3.10.4 | TPUI and LAL | 295 |
| I.3.10.5 | Keys | 295 |
| I.3.11 | Handover issues..... | 296 |
| I.4 | Elements of Messages/Information Elements | 296 |
| I.4.1 | CLMS-FIXED | 296 |
| I.4.2 | IWU-TO-IWU | 297 |
| I.4.3 | Info-type | 298 |
| I.4.4 | CLMS-VARIABLE..... | 298 |
| I.5 | Examples | 298 |
| I.5.1 | General | 298 |
| I.5.2 | Example 1 | 299 |
| I.5.3 | Example 2..... | 299 |
| I.5.4 | Example 3..... | 300 |
| I.5.5 | Example 4..... | 301 |
| I.6 | Usage of PPs or FPs in DCDL-net | 302 |
| I.6.1 | General | 302 |
| I.6.2 | Requirements to FPs..... | 302 |
| I.6.2.1 | General..... | 302 |
| I.6.2.2 | Members Data Transfer | 303 |
| I.6.2.3 | Direct Link Establishment | 303 |
| I.6.3 | Requirements to PPs..... | 304 |
| I.6.3.1 | General..... | 304 |
| I.6.3.2 | Membership Access Rights Allocation..... | 304 |
| I.6.3.3 | Members Data Transfer | 304 |
| I.6.3.4 | Direct Link Establishment | 305 |
| I.6.3.5 | Indirect Link Establishment | 305 |
| Annex J (normative): Scrolling Behaviour | | 306 |
| Annex K (informative): Bibliography | | 308 |
| Annex L (informative): Change history | | 310 |

| | |
|---------------|-----|
| History | 311 |
|---------------|-----|

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Project Digital Enhanced Cordless Telecommunications (DECT), and is now submitted for the ETSI standards One-step Approval Procedure.

The present document is part 5 of a multi-part deliverable. Full details of the entire series can be found in part 1 [1].

Further details of the DECT system may be found in TR 101 178 [53] and ETR 043 [54].

| Proposed national transposition dates | |
|--|---------------------------------|
| Date of latest announcement of this EN (doa): | 3 months after ETSI publication |
| Date of latest publication of new National Standard or endorsement of this EN (dop/e): | 6 months after doa |
| Date of withdrawal of any conflicting National Standard (dow): | 6 months after doa |

1 Scope

The present document gives an introduction and overview of the complete Digital Enhanced Cordless Telecommunications (DECT) Common Interface (CI).

The present document specifies the Network (NWK) layer. The NWK layer is part 5 of the EN 300 175 and layer 3 of the DECT protocol stack.

| | | |
|----------------|------|---------------|
| Network layer | | Network layer |
| C-plane | (3) | U-plane |
| DLC layer | | DLC layer |
| C-plane | (2b) | U-plane |
| MAC layer | | |
| (2a) | | |
| Physical layer | | |
| (1) | | |

Figure 1a

The present document only specifies the C-plane (control plane) of the DECT NWK layer. It contains no specification for the U-plane (user plane) because the U-plane is null for all services at the DECT NWK layer.

The C-plane contains all of the internal signalling information, and the NWK layer protocols are grouped into the following families of procedures:

- Call Control (CC);
- Supplementary Services (SS);
- Connection Oriented Message Service (COMS);
- ConnectionLess Message Service (CLMS);
- Mobility Management (MM);
- Link Control Entity (LCE).

The present document uses the layered model principles and terminology as described in ITU-T Recommendation X.200 and ITU-T Recommendation X.210.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

- [1] ETSI EN 300 175-1: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 1: Overview".
- [2] ETSI EN 300 175-2: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 2: Physical Layer (PHL)".

- [3] ETSI EN 300 175-3: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 3: Medium Access Control (MAC) layer".
- [4] ETSI EN 300 175-4: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 4: Data Link Control (DLC) layer".
- [5] ETSI EN 300 175-6: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 6: Identities and addressing".
- [6] ETSI EN 300 175-7: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 7: Security features".
- [7] ETSI EN 300 175-8: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 8: Speech coding and transmission".
- [8] ETSI EN 300 403-1: "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Signalling network layer for circuit-mode basic call control; Part 1: Protocol specification [ITU-T Recommendation Q.931 (1993), modified]".
- [9] ETSI TS 144 018: "Digital cellular telecommunications system (Phase 2+); Mobile radio interface layer 3 specification; Radio Resource Control Protocol (3GPP TS 44.018)".
- [10] Void.
- [11] Void.
- [12] Void.
- [13] ISO/IEC 2022 (1994): "Information technology - Character code structure and extension techniques".
- [14] ETSI ETS 300 133 (all parts): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Enhanced Radio MESSaging System (ERMES)".
- [15] ETSI EN 300 001: "Attachments to the Public Switched Telephone Network (PSTN); General technical requirements for equipment connected to an analogue subscriber interface in the PSTN".
- [16] ETSI EN 300 196-1: "Integrated Services Digital Network (ISDN); Generic functional protocol for the support of supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [17] ETSI ETS 300 125: "Integrated Services Digital Network (ISDN); User-network interface data link layer specification; Application of CCITT Recommendations Q.920/I.440 and Q.921/I.441".
- [18] ITU-T Recommendation T.71: "Link access protocol balanced (LAPB) extended for half-duplex physical level facility".
- [19] ISO/IEC 8802-2: "Information technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements - Part 2: Logical link control".
- [20] ISO/IEC 8208: "Information technology - Data communications - X.25 Packet Layer Protocol for Data Terminal Equipment".
- [21] ISO/IEC 8348: "Information technology - Open Systems Interconnection - Network service definition".
- [22] ISO/IEC 8473 (all parts): "Information technology - Protocol for providing the connectionless-mode network service".
- [23] ITU-T Recommendation X.263: "Information technology - Protocol identification in the Network Layer".
- [24] ETSI EN 300 130-1: "Integrated Services Digital Network (ISDN); Malicious Call Identification (MCID) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".

- [25] ETSI EN 300 207-1: "Integrated Services Digital Network (ISDN); Diversion supplementary services; Digital Subscriber Signalling System No. One (DSS1); Part 1: Protocol specification".
- [26] ETSI EN 300 286-1: "Integrated Services Digital Network (ISDN); User-to-User Signalling (UUS) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [27] ETSI EN 300 092-1: "Integrated Services Digital Network (ISDN); Calling Line Identification Presentation (CLIP) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [28] ETSI EN 300 093-1: "Integrated Services Digital Network (ISDN); Calling Line Identification Restriction (CLIR) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [29] ETSI EN 300 097-1: "Integrated Services Digital Network (ISDN); Connected Line Identification Presentation (COLP) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [30] ETSI EN 300 098-1: "Integrated Services Digital Network (ISDN); Connected Line Identification Restriction (COLR) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [31] ETSI EN 300 359-1: "Integrated Services Digital Network (ISDN); Completion of Calls to Busy Subscriber (CCBS) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [32] ETSI EN 300 210-1: "Integrated Services Digital Network (ISDN); Freephone (FPH) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [33] ETSI EN 300 182-1: "Integrated Services Digital Network (ISDN); Advice of Charge (AOC) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [34] ETSI EN 300 061-1: "Integrated Services Digital Network (ISDN); Subaddressing (SUB) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [35] ETSI EN 300 055-1: "Integrated Services Digital Network (ISDN); Terminal Portability (TP) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [36] ETSI EN 300 058-1: "Integrated Services Digital Network (ISDN); Call Waiting (CW) supplementary service; Digital subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [37] ETSI EN 300 064-1: "Integrated Services Digital Network (ISDN); Direct Dialling In (DDI) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [38] ETSI EN 300 052-1: "Integrated Services Digital Network (ISDN); Multiple Subscriber Number (MSN) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [39] ETSI EN 300 138-1: "Integrated Services Digital Network (ISDN); Closed User Group (CUG) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [40] ETSI EN 300 369-1: "Integrated Services Digital Network (ISDN); Explicit Call Transfer (ECT) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".

- [41] ETSI EN 300 185-1: "Integrated Services Digital Network (ISDN); Conference call, add-on (CONF) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [42] ETSI EN 300 141-1: "Integrated Services Digital Network (ISDN); Call Hold (HOLD) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [43] ETSI EN 300 188-1: "Integrated Services Digital Network (ISDN); Three-Party (3PTY) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [44] ITU-T Recommendation E.182: "Application of tones and recorded announcements in telephone services".
- [45] ETSI TS 144 006: "Digital cellular telecommunications system (Phase 2+); Mobile Station - Base Stations System (MS - BSS) Interface Data Link (DL) layer specification (3GPP TS 44.006)".
- [46] ITU-T Recommendation X.25: "Interface between Data Terminal Equipment (DTE) and Data Circuit-terminating Equipment (DCE) for terminals operating in the packet mode and connected to public data networks by dedicated circuit".
- [47] ITU-T Recommendation T.70: "Network-independent basic transport service for the telematic services".
- [48] ISO/IEC 1745: "Information processing - Basic mode control procedures for data communication systems".
- [49] ISO/IEC 8859-1: "Information technology - 8-bit single-byte coded graphic character sets - Part 1: Latin alphabet No. 1".
- [50] ETSI EN 300 757: "Digital Enhanced Cordless Telecommunications (DECT); Low Rate Messaging Service (LRMS); including Short Messaging Service (SMS)".
- [51] ETSI EN 300 370: "Digital Enhanced Cordless Telecommunications (DECT); Global System for Mobile communications (GSM); DECT/GSM Interworking Profile (IWP); Access and mapping (protocol/procedure description for 3,1 kHz speech service)".
- [52] ETSI EN 300 765-1: "Digital Enhanced Cordless Telecommunications (DECT); Radio in the Local Loop (RLL) Access Profile (RAP); Part 1: Basic telephony services".
- [53] ETSI TR 101 178: "Digital Enhanced Cordless Telecommunications (DECT); A High Level Guide to the DECT Standardization".
- [54] ETSI ETR 043: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Services and facilities requirements specification".
- [55] ISO/IEC 8859-15: "Information technology - 8-bit single-byte coded graphic character sets - Part 15: Latin alphabet No. 9".
- [56] ISO/IEC 8859-7: "Information technology - 8-bit single-byte coded graphic character sets - Part 7: Latin/Greek alphabet".
- [57] ISO/IEC 8859-9: "Information technology - 8-bit single-byte coded graphic character sets - Part 9: Latin alphabet No. 5".
- [58] ITU-T Recommendation V.110: "Support by an ISDN of data terminal equipments with V-Series type interfaces".
- [59] ITU-T Recommendation V.120: "Support by an ISDN of data terminal equipment with V-Series type interfaces with provision for statistical multiplexing".
- [60] ITU-T Recommendation X.30: "Support of X.21, X.21 bis and X.20 bis based Data Terminal Equipments (DTEs) by an Integrated Services Digital Network (ISDN)".

- [61] ETSI EN 300 765-2: "Digital Enhanced Cordless Telecommunications (DECT); Radio in the Local Loop (RLL) Access Profile (RAP); Part 2: Advanced telephony services".
- [62] [ISO/IEC 646:1991](#): "Information technology - ISO 7-bit coded character set for information interchange".
- [63] ITU-T Recommendation X.400: "Message handling services: Message handling system and service overview".
- [64] ETSI TS 101 863 (all parts): "Digital Enhanced Cordless Telecommunications (DECT); DECT/UMTS Interworking Profile (IWP)".
- [65] ETSI TS 124 008: "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); Mobile radio interface Layer 3 specification; Core network protocols; Stage 3 (3GPP TS 24.008)".
- [66] ETSI EN 300 700: "Digital Enhanced Cordless Telecommunications (DECT); Wireless Relay Station (WRS)".
- [67] IETF RFC 791 (STD5): "Internet Protocol".
- [68] IETF RFC 1661 (STD51): "The Point-to-Point Protocol (PPP)".
- [69] IETF RFC 2460: "Internet Protocol, Version 6 (IPv6) Specification".
- [70] IETF RFC 2543: "SIP: Session Initiation Protocol".
- [71] ITU-T Recommendation V.42: "Error-correcting procedures for DCEs using asynchronous-to-synchronous conversion".
- [72] ETSI TS 102 265: " Digital Enhanced Cordless Telecommunications (DECT); DECT access to IP Networks".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

active terminal/member: member of a DCDL-net that is powered-up, has locked to the MASTER and has announced itself as being present to the MASTER

attach: See EN 300 175-1 [1].

authentication of PT: See EN 300 175-1 [1].

authentication of FT: See EN 300 175-1 [1].

authentication of user: See EN 300 175-1 [1].

bearer service: See EN 300 175-1 [1].

C-plane: See EN 300 175-1 [1].

call: See EN 300 175-1 [1].

Cordless Radio Fixed Part (CRFP): See EN 300 175-1 [1].

DECT Distributed communications: See EN 300 175-1 [1].

DECT Local Network (DL-net): local network comprising number of DECT terminals capable of inter-communicating which may but need not be connected to an external network

DECT Network (DNW): See EN 300 175-1 [1].

double duplex bearer: See EN 300 175-1 [1].

End System (ES): See EN 300 175-1 [1].

external handover: See EN 300 175-1 [1].

Fixed Part (DECT Fixed Part) (FP): See EN 300 175-1 [1].

Fixed radio Termination (FT): See EN 300 175-1 [1].

geographically unique: See EN 300 175-1 [1].

Global Network (GNW): See EN 300 175-1 [1].

globally unique identity: See EN 300 175-1 [1].

handover: See EN 300 175-1 [1].

Hybrid Part (HyP): See EN 300 175-1 [1].

incoming call: See EN 300 175-1 [1].

inter-cell handover: See EN 300 175-1 [1].

internal call: See EN 300 175-1 [1].

internal handover: See EN 300 175-1 [1].

interoperability: See EN 300 175-1 [1].

interoperator roaming: See EN 300 175-1 [1].

Interworking Unit (IWU): See EN 300 175-1 [1].

intracell handover: See EN 300 175-1 [1].

intraoperator roaming: See EN 300 175-1 [1].

LAPC: DLC layer C-plane protocol entity

Local Network (LNW): See EN 300 175-1 [1].

locally unique identity: See EN 300 175-1 [1].

location area: See EN 300 175-1 [1].

location registration: See EN 300 175-1 [1].

Lower Layer Management Entity (LLME): See EN 300 175-1 [1].

MAC connection (connection): See EN 300 175-1 [1].

MASTER: specially dedicated terminal determining the DCDL-net synchronization and providing means of intra DCDL-net control and exchange of information

NOTE: By definition a MASTER is always an Active terminal.

outgoing call: See EN 300 175-1 [1].

paging: See EN 300 175-1 [1].

paging area: See EN 300 175-1 [1].

Portable Application (PA): See EN 300 175-1 [1].

Portable Part (DECT Portable Part) (PP): See EN 300 175-1 [1].

Portable radio Termination (PT): See EN 300 175-1 [1].

radio end point: See EN 300 175-1 [1].

Radio Fixed Part (RFP): See EN 300 175-1 [1].

registration: See EN 300 175-1 [1].

Repeater Part (REP): See EN 300 175-1 [1].

roaming: See EN 300 175-1 [1].

roaming service: See EN 300 175-1 [1].

RS: value used to establish authentication session keys

segment: See EN 300 175-1 [1].

segmentation: See EN 300 175-1 [1].

service provider (telecommunications service provider): See EN 300 175-1 [1].

sequencing (sequence numbering): See EN 300 175-1 [1].

service call: See EN 300 175-1 [1].

subscriber (customer): See EN 300 175-1 [1].

subscription registration: See EN 300 175-1 [1].

Supplementary Services (SS): See EN 300 175-1 [1].

teleservice: See EN 300 175-1 [1].

TPUI domain: See EN 300 175-1 [1].

U-plane: See EN 300 175-1 [1].

user (of a telecommunication network): See EN 300 175-1 [1].

Wireless Relay Station (WRS): See EN 300 175-1 [1].

XRES1: an eXpected RESponse calculated by a FT

XRES2: an eXpected RESponse calculated by a PT

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

| | |
|-------|---|
| 3PTY | Three ParTY |
| AC | AuthentIcation Code |
| ACC | ACCcount number |
| ACK | ACKnowledgement |
| ADPCM | Adaptive Differential Pulse Code Modulation |
| AK | AuthentIcation Key |
| AOC | Advice Of Charge |
| ARC | Access Rights Class |
| ARD | Access Rights Details |
| ARI | Access Rights Identity |
| A-VOL | Adaptive Volume |
| BACN | Bank ACCount Number |
| BCD | Binary Coded Decimal |
| BRAT | Basic Rate Adaption Service |
| C/L | ConnectionLess mode |
| C/O | Connection Oriented mode |
| CACN | Credit Card ACCount Number |

| | |
|----------|--|
| CAP | CTM Access Profile |
| CBI | Collective Broadcast Identifier |
| CC | Call Control |
| CCBS | Completion of Calls to Busy Subscriber |
| CCEI | Call Control Endpoint Identifier |
| CD | Call Deflection |
| CFB | Call Forwarding Busy |
| CFNR | Call Forwarding No Reply |
| CFU | Call Forwarding Unconditional |
| CH | Call Hold |
| CI | Cell Identity |
| CI | Common Interface |
| CISS | Call Independent Supplementary Services |
| CK | Cipher Key |
| CLEI | CLMS Endpoint Identifier |
| CLIP | Calling Line Identification Presentation |
| CLIR | Calling Line Identification Restriction |
| CLMS | ConnectionLess Message Service |
| COEI | COMS Endpoint Identifier |
| COLP | COnnected Line identification Presentation |
| COLR | COnnected Line identification Restriction |
| COMS | COnnected Line identification Restriction |
| CONF | CONFERence call add-on |
| C-plane | Control-plane |
| CRFP | Cordless Radio Fixed Part |
| CRSS | Call Related Supplementary Services |
| CSDb | Common System Database |
| CTA | Cordless Terminal Adapter |
| CTM | Cordless Terminal Mobility |
| CUG | Closed User Group |
| CW | Call Waiting |
| DCDL-net | Distributed Communication DECT Local-network |
| DCK | Derived Cipher Key |
| DDI | Direct Dialling In |
| DLC | Data Link Control |
| DLEI | Data Link Endpoint Identifier (DLC layer) |
| DL-net | DECT Local-network |
| DNW | DECT NetWork |
| DPRS | DECT Packet Radio Service |
| DSAA | DECT Standard Authentication Algorithm |
| DTE | Data Terminal Equipment |
| DTMF | Dual Tone Multi-Frequency |
| ECT | Explicit Call Transfer |
| ELI | Extended Location Information |
| EMC | Equipment Manufacturer Code |
| ES | End System |
| ETI | Extended Transaction Identifier |
| F | Flag |
| F-CC | FT side-Call Control |
| F-IWU | FT-InterWorking Unit |
| FP | Fixed Part |
| FPH | FreePHone |
| FREL | Frame RELay service |
| FT | Fixed radio Termination |
| GAP | Generic Access Profile |
| GSM | Global System for Mobile communications |
| HyP | Hybrid Part |
| IA5 | International Alphabet No.5 |

NOTE: Defined by ITU-T Recommendation T.50.

ID Identifier

| | |
|----------------|---|
| IdN | Identity Number |
| IETF | Internet Engineering Task Force |
| IIP | Intermediate ISDN access Profile |
| IMSI | International Mobile Subscriber Identity |
| I _p | higher layer Information channel (unprotected), (logical channels to the MAC layer) |
| IP | Internet Protocol |
| IPEI | International Portable Equipment Identity |
| IPII | International Portable User Identity |
| IPv4 | Internet Protocol version 4 |
| IPv6 | Internet Protocol version 6 |
| IRV | International Reference Version |
| ISDN | Integrated Services Digital Network |
| IWU | InterWorking Unit |
| KS' | FP authentication Session Key |
| KS | PP authentication Session Key |
| LAC | Location Area Code |
| LAN | Local Area Network |
| LAPC | A reliable C-plane DLC link |
| LCE | Link Control Entity |
| LCN | Logical Connection Number |
| LLC | Logical Link Control |
| LLME | Lower Layer Management Entity |
| LLN | Logical Link Number |
| LRMS | Low Rate Messaging Service |
| LSB | Least Significant Bit |
| MAC | Medium Access Control |
| MCC | Mobile Country Code |
| MCID | Malicious Call Identification |
| MI | Message Identifier |
| MM | Mobility Management |
| MMS | Multimedia Messaging Service |
| MNC | Mobile Network Code |
| MRAP | Multimedia in Radio in the local loop Access Profile |
| MSB | Most Significant Bit |
| MSN | Multiple Subscriber Number |
| NLR | No Link Required |
| N-REJ | Noise Rejection |
| NWK | NetWork |
| OA&M | Operation Administration and Management |
| PARI | Primary Access Rights Identity |
| PARK | Portable Access Rights Key |
| PBX | Private Branch eXchange |
| P-CC | PT side-Call Control |
| PD | Protocol Discriminator |
| PDU | Protocol Data Unit |
| PLI | Park Length Indicator |
| PLMN | Public Land Mobile Network |
| PMID | Portable part MAC IDentity (MAC layer) |
| POC | Public Operator Code |
| PP | Portable Part |
| PPP | Point-to-Point Protocol |
| PSCN | Primary receiver Scan Carrier Number |
| PSN | Portable equipment Serial Number |
| PSTN | Public Switched Telephone Network |
| PT | Portable radio Termination |
| P-TMSI | Packet-Temporary Mobile Subscriber Identity |
| PUN | Portable User Number |
| PUT | Portable User Type |
| RAND-F | a RANDom challenge issued by a FT |
| RAND-P | a RANDom challenge issued by a PT |
| RAP | Radio in the local loop Access Profile |

| | |
|---------|--|
| REP | REpeater Part |
| RES1 | a RESponse calculated by a PT |
| RES2 | a RESponse calculated by a FT |
| RFC | Request For Comments |
| RFP | Radio Fixed Part |
| RPN | Radio fixed Part Number |
| SAP | Service Access Point |
| SARI | Secondary Access Rights Identity |
| SDU | Service Data Unit |
| SIP | Session Initiation Protocol |
| SMS | Short Message Service |
| SS | Supplementary Services |
| STD | STandarD |
| SUB | SUBaddressing |
| TARI | Tertiary Access Rights Identity |
| TCL | Telephone Coupling Loss |
| TDMA | Time Division Multiple Access |
| TI | Transaction Identifier |
| TMSI | Temporary Mobile Subscriber Identity |
| TP | Terminal Portability |
| TPUI | Temporary Portable User Identity |
| TV | Transaction Value |
| TVX | Transaction Value (eXtended) |
| UAK | User Authentication Key |
| UMTS | Universal Mobile Telecommunications System |
| UPI | User Personal Identification |
| U-plane | User-plane |
| UUS | User to User Signalling |
| WRS | Wireless Relay Station |

4 Overview of the NWK layer

The DECT NWK layer (layer 3) protocol contains the following groups of functions (see figure 1b).

Link Control Entity (LCE): The establishment, operation and release of a C-plane link between the fixed termination and every active portable termination.

Call Control (CC) entity: The establishment, maintenance and release of circuit switched calls.

Call Independent Supplementary Services (CISS) entity: The support of call independent supplementary services.

Connection Oriented Message Service (COMS) entity: The support of connection-oriented messages.

Connectionless Message Service (CLMS) entity: The support of connectionless messages.

Mobility Management (MM) entity: The management of identities, authentication, location updating, on-air subscription and key allocation.

In addition all of these C-plane entities interface the Lower Layer Management Entity (LLME). This provides coordination of the operations between different NWK layer entities and also between the NWK layer and the lower layers.

The CC procedures and messages used in this protocol are based on the layer 3 procedures and messages defined in EN 300 403-1 [8]. Many of the alterations adopted in I-ETS 300 022 have also been adopted here.

The other groups of procedures are also based on the similar groupings as defined in I-ETS 300 022.

Neither of these source documents can serve as a detailed reference for the present document, because DECT contains many differences. These include:

- a) the LCE, that provides a co-ordinated use of the layer 2 resources, including management of the broadcast services;
- b) the advanced data capabilities of DECT, that include the capability for asymmetric calls and for multiple instances of a call.

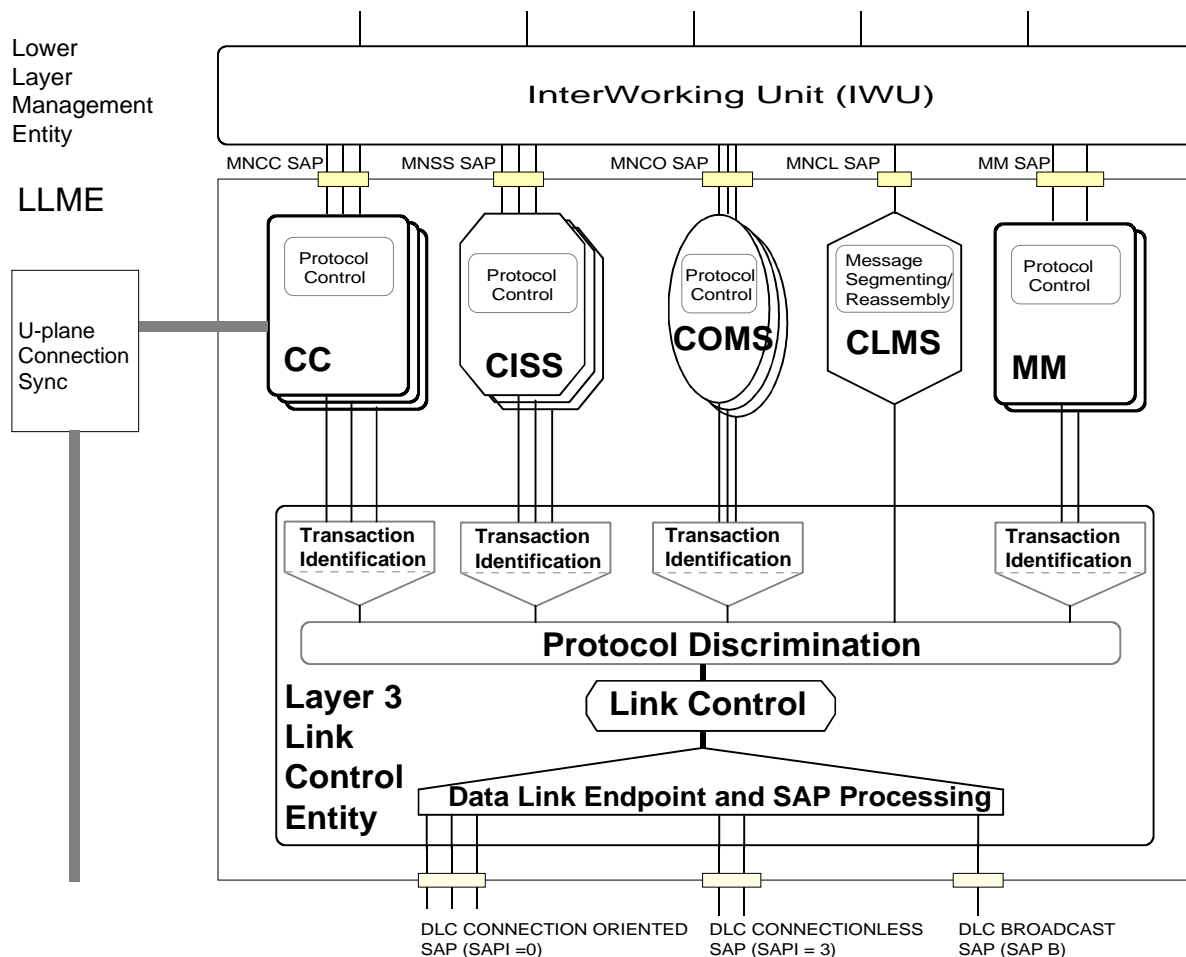


Figure 1b: C-plane model

The U-plane is completely null at the NWK layer. LU_x (x = 1 to 15) is mapped to NU_x (x = 1 to 15).

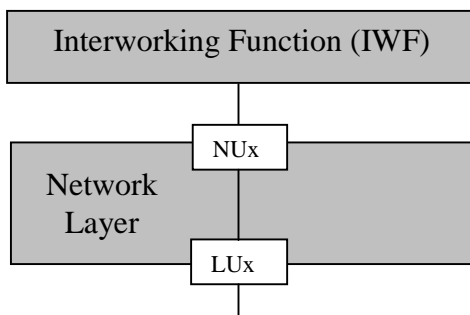


Figure 2: U-plane model

5 Overview of procedures

5.1 General

Each of the functional groupings (each entity) defined in clause 4 is described separately, and has its own set of procedures and messages.

This clause provides a short overview of the procedures and messages for each entity. The complete descriptions of messages appear in clause 6 and the detailed procedures appear in clauses 9 to 14. In the event of any conflict, the detailed message and procedure definitions shall take precedence.

As shown in the C-plane model (see figure 1b) the LCE shall provide a common foundation for all the other "higher entities". The CC, CISS, COMS, CLMS and MM are collectively described as "higher entities". The LCE shall provide a message routing service to these "higher entities", using the combination of the Data Link Control (DLC) layer DLEI and the higher entity protocol discriminator element.

The present document only considers the provision and coordination of services to a single PT. The provision of services to multiple PTs by one FT shall be understood to be based on independent operation, and is not considered any further in the present document.

Within one PT, multiple instances of the CC, CISS and COMS entities may exist but there may be only two instances of the MM and one instance of the CLMS entities as shown in figure 1b.

All of the procedures are based on the exchange of messages between peer entities. The present document uses two distinct formats of message:

- S-FORMAT messages; these messages have a similar structure to EN 300 403-1 [8] and I-ETS 300 022;
- B-FORMAT messages; these messages are specially coded to meet the physical constraints of the broadcast service. They are not similar to EN 300 403-1 [8] messages.

The LCE shall provide a common routing service for messages to and from the separate entities using information that is explicit in every S-FORMAT message and implicit in every B-FORMAT message.

B-FORMAT messages shall only be used by the LCE and CLMS entities.

5.2 Overview of Call Control (CC)

5.2.1 General

CC is the main service instance. It provides a set of procedures that allow the establishment, maintenance and release of circuit switched services. It also provides support for all call related signalling.

Each instance of CC is termed a "call". This shall be associated with one or more U-plane service instances by the LLME. Both the CC service and the associated U-plane service are required to provide the complete service to a user.

5.2.2 Call establishment

5.2.2.1 Call setup

Call setup involves the exchange of some of the following information between the originator and the responding side of the call:

- International Portable User Identity (IPUI), International Portable Equipment Identity (IPEI) or Temporary Portable User Identity (TPUI) (portable identity);
- Access Rights Identity (ARI) (fixed identity);
- called party number;

- interworking attributes;
- call attributes:
 - C-plane attributes (NWK layer and DLC layer);
 - U-plane attributes (DLC and MAC layers).

Call setup can be originated by either side (FT or PT or HyP).

NOTE 1: The HyP may initiate calls behaving as FT or PT, therefore the present document in general talks for communication between PT and FT assuming that this may be as well a HyP behaving as PT or FT. For the exact procedure related to HyP see annex I.

The IWU may request the CC entity to initiate a call setup at any time. The CC shall then submit a call setup message to the LCE, and the LCE shall determine which link establishment procedure is necessary (i.e. direct establishment, indirect establishment or none).

NOTE 2: One exception from this rule is e.g. the Collective Ringing described in clause 14.4. In this case in order to initiate a call setup, the IWU requests directly the LCE to page one or more PPs and the PP is expected to initiate a call setup which will be mapped to the call in the IWU.

This first call setup message shall define the transaction identifier for all subsequent messages (messages related to this call), and the management of these transaction identifiers is an independent task for each side.

The call setup message may not contain all of the setup information. If not, the remaining information shall be submitted in subsequent call information messages.

If the requested service is acceptable, the peer CC entity shall accept the setup and shall respond with a positive message such as setup acknowledge. This reply, and all future replies, adopt the transaction identifier defined by the initial call setup message.

If the setup is unacceptable to the peer entity, it shall reply with a call release message.

5.2.2.2 Service negotiation

Service negotiation may be supported during the call establishment phase. This possibility shall be indicated in the first call setup message. The negotiation shall involve further peer-to-peer exchanges to determine an agreed set of service attributes.

5.2.3 Call connect

The call connect procedures are used to signal that the peer-to-peer U-plane communication has been enabled. These procedures provide signalling to/from the IWUs that the U-plane exchange has started.

This final acceptance of a call by the peer entity is signalled by sending a connect message. For FT initiated calls, the FT then responds with a connect acknowledge message.

There is no guarantee of peer-to-peer U-plane establishment until this procedure has completed.

5.2.4 Call information

The call information procedures may be invoked during call establishment and also as part of an established call (i.e. during the "ACTIVE" state).

These information exchange procedures shall always be supported. Their functions include the exchange of external information (for example, between a PP application and a FP interworking unit) in a series of one or more {CC-INFO} messages. This information is handled transparently by the CC protocol.

5.2.5 Service change

The service change procedures may only be invoked as part of an established call (i.e. during the "ACTIVE" state).

These service change procedures and the related service change messages are optional and should only be supported by equipment that also supports the related LLME (control) procedures. These procedures support a restricted set of modifications to the call. Each modification shall be offered to and accepted by the peer CC before it can be initiated.

5.2.6 Call release

The call release procedure is used to release all U-plane resources and all NWK layer C-plane resources associated with one call instance. The call release procedure can be invoked in two ways:

- directly, when the call ends properly;
- indirectly, when a call timer expires.

The call release message is submitted to the LCE which decides on the exact release procedure to be used. A release confirm message then provides confirmation from the peer CC entity that the release message has been accepted.

NOTE: If any other call instances are in use to this terminal, the C-plane link will be maintained by the LCE, and only the resources associated with this one instance will be released.

5.3 Overview of Supplementary Services (SS)

5.3.1 General

SS provide additional capabilities to be used with bearer services and teleservices.

SS are divided into two types:

- Call Related Supplementary Services (CRSS);
- Call Independent Supplementary Services (CISS).

CRSS are explicitly associated with a single instance of a CC entity. This association requires that all CRSS information elements are contained in messages that use the transaction identifier of that CC-instance. CRSS shall only be invoked within a CC instance at any phase of a CC, (establish, information or release) and multiple CRSS may be invoked within a single call.

CISS may refer to all CC instances (e.g. "call forward on busy") or they may relate to services that are unconnected to any CC instances. The messages for a CISS are invoked independent of any CC instance and are identified by using independent transaction identifiers that are directly allocated by the CISS entity.

An example of CISS is the charging procedures:

- negotiation of account details;
- charge sharing;
- reverse charging;
- advice of charge;
- charge confirmation (electronic receipt).

Three generic protocols are defined for the control of SS, two of which are stimulus, the third being functional. These protocols are:

- the keypad protocol;
- the feature key management protocol;
- the functional protocol.

All three protocols can be used for both CRSS and CISS.

5.3.2 Keypad protocol

The keypad protocol is based on the use of the <<"KEYPAD">> and <<"DISPLAY">> information elements. The <<"KEYPAD">> information element may be included in the {CC-SETUP} and {CC-INFO} messages and in the CISS messages. The <<"DISPLAY">> information element may be included in various messages sent by the network to the user, as defined in clause 6.3.

This protocol applies to SS invocation in the user-to-network direction, and the keypad codes used for the invocation of an individual SS are network dependent.

The protocol is stimulus in the sense that it does not require any knowledge about the invoked SS by the PT or FT.

5.3.3 Feature key management protocol

The feature key management protocol is based on the use of the <<FEATURE-ACTIVATE>> and <<FEATURE-INDICATE>> information elements. The <<FEATURE-ACTIVATE>> information element may be included in various basic CC messages or CISS messages as specified in clause 6.3, in the user-to-network direction. The <<FEATURE-INDICATE>> information element may be included in various basic CC messages or CISS messages in the network-to-user direction.

This protocol typically applies to SS operation during calls but also allows for CISS control. CISS control is accomplished by sending a {CISS-REGISTER} or {FACILITY} message which contains a <<FEATURE-ACTIVATE>> information element. The user may send a <<FEATURE-ACTIVATE>> request at any time, and the network may send a <<FEATURE-INDICATE>> information element any time.

5.3.4 Functional protocol

Two categories of procedures are defined for the functional signalling for SS. The first category, called the separate message approach, utilizes separate message types to indicate a desired function. The hold and retrieve family of messages are identified for this category.

The second category, called the common information element procedure, utilizes the <<FACILITY>> information element and applies only to SS that do not require synchronization of resources between the user and the network. A {FACILITY}, a {CISS-REGISTER} or an existing CC message is used to carry the <<FACILITY>> information element.

Both categories are specified in a symmetrical manner and can be signalled in the network-to-user and the user-to-network directions.

The protocol is functional in the sense that it requires the knowledge of the related SS by the PT or FT supporting it. This protocol, therefore, allows for autonomous operation by the DECT network, with no user (human) intervention. The protocol does not define the man-machine-interface.

5.4 Overview of Connection Oriented Message Service (COMS)

5.4.1 General

The COMS offers a point-to-point connection oriented packet service. This service only supports packet mode calls, and offers a faster (and simpler) call establishment than the CC entity. The COMS includes the ability for rapid suspension (and resumption) of the connection, this capability is provided to allow the lower layer resources to be released during periods of inactivity (this provides a function similar to the virtual connection mode of packet communications).

5.4.2 COMS establishment

COMS call setup involves the exchange of some of the following information between the originator and the responding side of the call:

- TPUI or IPUI portable identity;
- ARI fixed identity;
- interworking attributes;
- COMS attributes (C-plane attributes for NWK layer and DLC layer).

COMS setup can be originated by either side (FT or PT).

The IWU can request a COMS entity to initiate a call setup at any time. The COMS then submits a call setup message to the LCE. The LCE then decides if any link establishment procedures are necessary (i.e. direct establishment, indirect establishment or none).

This first COMS setup message defines the transaction identifier for all subsequent messages (messages related to this call), and the management of these transaction identifiers is an independent task for each side.

If the COMS setup is successful, the complete setup message is delivered to the peer COMS entity, and if the call details are acceptable the peer responds with a connect message. This reply, and all future replies, adopt the transaction identifier defined by the initial call setup message.

If the COMS setup is unsuccessful, the originating entity will timeout. If the setup is unacceptable to the peer entity it shall reply with a release message.

5.4.3 Service negotiation

Service negotiation may be supported during the call establishment phase. This possibility shall be indicated in the first call setup message. The negotiation shall involve further peer-to-peer exchanges to determine an agreed set of service attributes.

5.4.4 COMS connect

The COMS connect procedures are used to signal that the interworking-to-interworking communication (C-plane) has been enabled. These procedures provide signalling to/from the IWUs that C-plane exchange has started.

This acceptance of a COMS call is signalled by the peer entity by sending a connect message, and the initiating side responds with a connect acknowledge message. There is no guarantee of end-to-end communication until this procedure has completed.

5.4.5 COMS data transfer

Following a successful connect, one or more packets of data can be transferred. Each packet is individually acknowledged when it is successfully delivered to the peer IWU. Long packets may be segmented, and are only delivered and acknowledged if all segments are received correctly.

The COMS data transfer allows for a small number of information (packet) formats. These formats may be used in any order and in all cases the sequence of packets shall be preserved.

5.4.6 COMS suspend and resume

These procedures are optional. They use the same (C-plane) procedures as for CC to support suspension and resumption of the lower resources.

NOTE: This service is intended to support virtual data circuits such as for ITU-T Recommendation X.25 [46] and for bursty data terminals, at low to medium data rates.

5.4.7 COMS release

The COMS release procedures are used to release all C-plane resources associated with one COMS instance. The release procedure can be invoked in two ways:

- directly, when the call ends properly;
- indirectly, when a call timer expires.

The COMS release message is submitted to the LCE which decides on the exact release procedures to be used. A release confirm message then provides confirmation from the peer COMS entity that the release message has been understood.

NOTE: If any other call instances are in use to this terminal, the C-plane link will be maintained by the LCE, and only the resources associated with this one instance will be released.

5.5 Overview of ConnectionLess Message Service (CLMS)

The CLMS offers a connectionless point-to-point or point-to-multipoint service. The CLMS may offer either or both of the following service types:

- fixed length message service;
- variable length message service.

5.5.1 Fixed length message service

This service only operates in the direction FT to PT. Messages are transmitted using the DLC broadcast services, and normally this should provide a more reliable service than the variable message service (see below) because broadcast transmissions are duplicated in the lower layers.

This service allows for the transport of structured or unstructured data, up to 160 bits.

NOTE: This is intended for group paging and broadcast information such as key system information.

5.5.2 Variable length message service

This service may operate in both directions. In the general case, a connection oriented link is not available, and the message is routed over a point-to-multipoint connectionless link.

NOTE: In the event that a connection oriented link already exists to the relevant PT, then the message may be routed over that (existing) link by the LCE.

In both cases successful delivery of the message shall not be acknowledged by the peer CLMS entity.

Only one variable message transaction to each PT is allowed at any one time.

5.6 Overview of Mobility Management (MM)

5.6.1 General

The MM entity handles functions necessary for the secure provision of DECT services and supports in particular incoming calls. These functions are necessary due to the mobile nature of the DECT user and due to highly probable fraudulent attacks upon the radio interface.

MM procedures are described in eight groups:

- a) identity procedures;
- b) authentication procedures;
- c) location procedures;
- d) access rights procedures;
- e) key allocation procedure;
- f) parameter retrieval procedure;
- g) ciphering related procedure;
- h) external protocol information procedure.

These groups are briefly described in this clause. The MM procedures themselves are described in clause 13. The management of MM procedures including the use of an MM-procedure priority list to circumvent MM-state machine deadlocks, are described in clause 15.5.

5.6.2 Identity procedures

The identity procedures are based on the DECT identities defined in EN 300 175-6 [5].

The identity procedures serve three purposes:

- to request a PT to provide specific identification parameters to the FT;
- to assign a TPUI and/or a network assigned identity to a PT;
- to delete a TPUI and/or a network assigned identity in a PT.

PT identities (IPUI and TPUI) have an important relationship to FT identities:

- an IPUI is paired with one or more ARIs. The IPUI is usable on any fixed network that supports one (or more) of the paired ARIs;
- a TPUI is paired with one IPUI within one location area. The TPUI is only valid on FTs belonging to the associated location area.

The identity procedures are always initiated by the FT, and any one of them may be initiated at any time, including during a CC-call, CISS-call or COMS-call. However, the procedure may be triggered by a PT initiated event.

5.6.3 Authentication procedures

Authentication procedures can be used in both directions:

- PT authentication defines the mechanism that is used to provide the authentication of a PT to an FT;
- FT authentication defines the mechanism that is used to provide the authentication of an FT to a PT;
- user authentication defines the mechanism that is used to provide the authentication of the user to an FT.

The authentication procedures serve two purposes:

- to check that the identity provided by the PT or FT is a true identity;
- to provide a new ciphering key to the PT and FT.

5.6.4 Location procedures

The location procedures are necessary for incoming call provision. They are designed to allow the FT to minimize location database accesses in the event that duplicated or redundant messages are received from a PT.

The location procedures are concerned with two levels of location:

- locating; reporting the position of the PT in terms of location areas to the FT;
- detaching (attaching); reporting to the FT that the PT is not ready (ready) to receive calls.

Locating is a higher level than attaching. This means that a location registration can implicitly be regarded as an automatic attachment. Location registration without changing the location area is referred to as attaching, no separate message is defined.

NOTE: "Delocation" (defined as deletion of an entry in the external location database) is not a specified function for the air interface. The decision to "delocate" is specific to each FT. It should be possible to detach without "delocating".

Three location procedures are defined:

- location registration procedure for locating and attaching;
- detach procedure for detaching;
- location update procedure which is used by the FT to request from the PT to perform location updating, e.g. after location areas have been rearranged.

5.6.5 Access rights procedures

Three procedures are defined, one for obtaining the access rights, one for terminating the access rights and one for modifying the access rights.

The procedure for obtaining the access rights is used to load down the IPUI and the Portable Access Rights Key (PARK) to the PT.

Other service specific information may also be transferred during this procedure. This is stored at the handset or/and at the base for later retrieval by the system.

NOTE: This procedure does not transfer an authentication key. If a first key had been put in (e.g. an Authentication Code (AC)), then the key allocation procedure can be used to replace this first key by an other key (e.g. the User Authentication Key (UAK)).

The procedure for terminating the access rights is used to remove a specific IPUI and all information which is related to this IPUI from the PT and from the FT or to remove a PARK from the PT and the related access rights information from the FT.

The procedure for modifying the access rights is used to change IPUI or PARK or PLI in the PT without user intervention.

5.6.6 Key allocation procedure

This procedure can be used to replace an Authentication Code (AC) by an UAK. For calculating the UAK a DECT Standard Authentication Algorithm (DSAA) is used. The AC that is used in this procedure should be as long as possible and should have at least 32 bits, but better 64 bits or more. After a successful key allocation, the used AC shall be erased.

5.6.7 Parameter retrieval procedure

This procedure may use an existing link between the PT and the FT to allow the PT to obtain additional information, which could be necessary to perform external handover to an other FT. In the case of an external handover, setting up a link to the new FT is done via the CC entity.

The procedure may be used for transmission of parameters needed in various other procedures, e.g. RPN for a WRS, DCDL-net active members specific information, dynamically assigned setup capabilities, etc.

5.6.8 Cipherring related procedure

This procedure is used to define the cipher parameters and to engage or disengage cipherring of a connection.

5.6.9 External protocol information procedure

This procedure is used to provide means for exchange of external to the DECT protocol stack information.

5.7 Overview of Link Control Entity (LCE)

5.7.1 General

The LCE is the lowest entity in the NWK layer. It performs the following tasks:

- a) supervision of lower layer link states for every data link endpoint in the C-plane;
- b) downlink routing - routing of messages to different C-plane data link endpoints (instances of S-SAP);
- c) uplink routing - routing of messages from different data link endpoints based on the protocol discriminator and the transaction identifier;
- d) queuing of messages to all C-plane data link endpoints;
- e) creation and management of {LCE-REQUEST-PAGE} messages, and submitting them to the B-SAP (see note);
- f) queuing and submission of other messages to the B-SAP;
- g) assignment of new Data Link Endpoint Identifiers (DLEI) when a successful link establishment is indicated;
- h) assignment of new NWK layer instances to existing data link endpoints;
- i) reporting data link failures to all NWK layer instances that are using that link.

NOTE: A LCE-REQUEST-PAGE message may be transmitted over an existing link if it is used for resume paging.

The link states as observed by the LCE are shown in annex C. These states are a combination of the DLC internal states plus the underlying connection. For example, the "LINK ESTABLISHED" state means that the DLC LAPC is established and the associated MAC connection is established.

5.7.2 Data Link Endpoint Identifier (DLEI)

Every message submitted to, or originated by, the LCE shall be routed to its correct DLEI. The necessary mapping should be based on two parameters:

- the IPUI or the assigned individual TPUI;
- the originating entity (CC, CISS, COMS, CLMS, MM or LCE), plus any associated transaction identifier.

This mapping should be defined as part of data link establishment.

NOTE 1: For group calls, there may be several alternative mappings (alternative acceptable values of IPUI). The link establishment procedures always create a single mapping, but the selection procedures are not defined in the present document.

NOTE 2: There is no DLEI defined for broadcast purposes. A broadcast DLEI is not required because broadcasts are clearly distinguished at the DLC and MAC layers by the use of a dedicated broadcast channel.

5.7.3 Data link establishment

A data link is only established in response to an explicit request from a higher entity. The necessary actions are slightly different at the FT and the PT.

The LCE shall request a suitable DLEI from the LLME in response to this request, using both:

- the IPUI or the assigned individual TPUI;
- the originating entity (CC, CISS, COMS, CLMS, MM or LCE), plus any associated transaction identifier.

Having obtained a DLEI, the LCE procedure shall depend on the state of that link:

- a) if the link is established, no action is required and any messages shall be immediately submitted using DL_DATA-req primitives;
- b) if the link is not established, the LCE shall determine the appropriate method of establishment. Two methods are defined:
 - direct establishment, for all PT initiations and for FT initiations where "fast DLC setup" is supported;
 - indirect establishment, for all other cases, including failure of FT initiated "fast DLC setup".

Indirect establishment uses the request paging procedures described in clause 5.7.8.

If Class B operation is requested, and there is not an established Class B link, the LCE shall automatically attempt to establish (or resume) Class B operation on one link. If Class B establishment fails, but Class A operation is offered, the LCE shall proceed with Class A operation and shall notify the initiating entity.

NOTE: Refer to EN 300 175-4 [4] for details of Class A and Class B link operation.

- c) if link establishment fails, the LCE shall discard the message and shall notify the initiating entity of this failure.

Any messages from higher entities shall be queued by the LCE during link establishment, as defined in clause 5.7.7.

5.7.4 Data link re-establishment

If the link associated with any active DLEI fails, the LCE shall notify all associated higher entities of this failure. Link re-establishment shall only be attempted in response to a request from one of these entities.

Link re-establishment may be requested at any time by one of the higher entities. The LCE shall immediately attempt to re-establish the link, and shall notify all higher entities of this event.

Any messages from higher entities shall be queued by the LCE during link re-establishment, as defined in clause 5.7.7.

5.7.5 Data link release

Under normal conditions, a data link is only released if all higher entities associated with that link have been released.

The link may be maintained for a short period after the release of the last call.

5.7.6 Data link suspend and resume

The LCE controls the suspension and resumption of each C-plane data link in response to demands from the higher entities. A link suspension shall only be requested by a CC or COMS entity, and the link shall only be suspended if no other higher entities are active. The link shall be immediately resumed if a link is requested by any of the higher entities.

During the suspend and resume procedures, any messages from higher entities shall be queued by the LCE, as defined in clause 5.7.7. The existence of queued messages for a suspended link should cause immediate resumption of that link.

NOTE: DECT standard provides two suspend/resume procedures. Data link suspend and resume which is described in the present document, and MAC suspend and resume described in EN 300 175-3 [3].

5.7.7 Queuing of messages

Messages are only queued during link establishment, link re-establishment and during link suspend and resume procedures. Once a link has been established, messages should be sent as quickly as possible.

NOTE: Following successful link establishment, messages are not queued by the LCE, but they may still be queued by the DLC layer link entity (see EN 300 175-4 [4]).

5.7.8 Request paging

Request paging is used to communicate to a portable termination that the DECT fixed termination wants to establish a link to it, wants to initiate a connectionless message service or wants a particular set of PPs to initiate ringing. The {LCE-REQUEST-PAGE} message contains very limited information (the main element is simply a shortened identity of the PT), a complete call establishment message is only exchanged after the link has been established.

NOTE: The {LCE-REQUEST-PAGE} message is a B-FORMAT message. Refer to clause 8.2.

In case of request for a link, upon receipt of a {LCE-REQUEST-PAGE} message, the LCE of the addressed PT initiates an immediate link establishment. The first message shall be a {LCE-PAGE-RESPONSE} message. This distinguishes it from an outgoing call PT initiated link establishment. This message shall contain the full IPUI or the assigned individual TPUI of the responding PT (see clause 14.2.3).

A FT shall only initiate one of these procedures to any given IPUI (or TPUI) at any one time, and the LCE is required to maintain a record of outstanding requests, and to report their success or failure to the correct originating entity (CC, CISS, COMS or MM).

This procedure should not be used when a suitable link already exists to the chosen IPUI (or TPUI), and it is the responsibility of the LLME to determine if such a link exists.

In the case of request for ringing on receipt of the {LCE-REQUEST-PAGE} message indicating "ringing" the requested PPs shall initiate ringing without link establishment. Such shall be initiated upon following answer from one of the ringing PPs. Three types of ringing are considered, "Group" when only PPs that have been assigned the received connectionless group TPUI shall ring, "Collective" when all subscribed PPs shall ring and "Group Mask" when only PPs with assigned connectionless group TPUI that matches the received group mask shall ring.

6 Message functional definitions

6.1 Overview of message structures

6.1.1 Messages

Messages are the highest level of information grouping defined in the NWK layer. Each message contains a variable set of information relating to one (NWK layer) transaction of one entity. The relevant entity and the transaction number are identified by special elements that appear in every message.

Messages are divided into groups according to the originating entities (CC, CISS, COMS, CLMS, MM or LCE). A summary of all the possible messages for each group appears in clause 6.2. These summaries includes both S-FORMAT messages and B-FORMAT messages.

Clauses 6.3 and 6.4 list the allowed functional contents of each message. Each message is defined by a table that lists the mandatory and optional information elements for that message.

The functional contents for each S-FORMAT message are listed in clause 6.3, and clause 7 contains coding details of the individual information elements for the S-FORMAT messages.

The functional contents for each B-FORMAT message are listed in clause 6.4, and clause 8 contains coding details of the individual information elements for the B-FORMAT messages.

6.1.2 Information elements

Information elements are a lower level of information grouping, where the information usually relates to one specific aspect of the transaction. Elements are defined in a general way that allows elements to be (re)used within different messages. DECT defines three types of information elements:

- DECT specific information elements;
- DECT standard information elements;
- DECT transparent information elements.

DECT specific information elements are those elements that relate exclusively to the (internal) operation of the DECT protocol. These may refer to any or all of the layers.

DECT standard information elements are those elements that relate to the interaction of the DECT protocol with the IWUs and other higher layers. DECT standard information elements provide a standard mechanism for interoperation of PTs and FTs.

There are two DECT transparent information elements, <<IWU-TO-IWU>> and <<IWU-PACKET>>, corresponding to two possible structures of external information. These information elements are provided as a general mechanism for transporting external information that is of no (internal) relevance to the DECT protocol entities.

6.2 Message summaries

6.2.1 Summary of CC messages

Table 1: CC message summary (includes call related supplementary services)

| | Direction | Clause |
|--|-----------|----------|
| Call establishment messages | | |
| {CC-SETUP} | Both | 6.3.2.1 |
| {CC-INFO} | Both | 6.3.2.2 |
| {CC-SETUP-ACK} | F=>P | 6.3.2.3 |
| {CC-CALL-PROC} | F=>P | 6.3.2.4 |
| {CC-ALERTING} | Both | 6.3.2.5 |
| {CC-NOTIFY} | F=>P | 6.3.2.13 |
| {CC-CONNECT} | Both | 6.3.2.6 |
| {CC-CONNECT-ACK} | Both | 6.3.2.7 |
| Call information phase messages | | |
| {CC-INFO} | Both | 6.3.2.2 |
| {CC-SERVICE-CHANGE} | Both | 6.3.2.10 |
| {CC-SERVICE-ACCEPT} | Both | 6.3.2.11 |
| {CC-SERVICE-REJECT} | Both | 6.3.2.12 |
| {IWU-INFO} | Both | 6.3.2.14 |
| Call related supplementary services | | |
| {FACILITY} | Both | 6.3.3.1 |
| {HOLD} | Both | 6.3.3.2 |
| {HOLD-ACK} | Both | 6.3.3.3 |
| {HOLD-REJECT} | Both | 6.3.3.4 |
| {RETRIEVE} | Both | 6.3.3.5 |
| {RETRIEVE-ACK} | Both | 6.3.3.6 |
| {RETRIEVE-REJECT} | Both | 6.3.3.7 |
| Call release messages | | |
| {CC-INFO} | Both | 6.3.2.2 |
| {CC-RELEASE} | Both | 6.3.2.8 |
| {CC-RELEASE-COM} | Both | 6.3.2.9 |

6.2.2 Summary of CISS messages

Table 2: CISS message summary

| | Direction | Clause |
|---|-----------|---------|
| CISS establishment messages {CISS-REGISTER} | Both | 6.3.3.8 |
| CISS information phase messages {FACILITY} | Both | 6.3.3.1 |
| CISS release messages {CISS-RELEASE-COM} | Both | 6.3.3.9 |

6.2.3 Summary of COMS messages

Table 3: COMS message summary

| | Direction | Clause |
|---|-----------|---------|
| COMS establishment messages {COMS-SETUP} | Both | 6.3.4.1 |
| {COMS-CONNECT} | Both | 6.3.4.4 |
| {COMS-NOTIFY} | F=>P | 6.3.4.7 |
| COMS information phase messages {COMS-INFO} | Both | 6.3.4.2 |
| {COMS-ACK} | Both | 6.3.4.3 |
| COMS release messages {COMS-RELEASE} | Both | 6.3.4.5 |
| {COMS-RELEASE-COM} | Both | 6.3.4.6 |

6.2.4 Summary of CLMS messages

Table 4: CLMS message summary

| | Direction | Clause |
|---|-----------|---------|
| CLMS information phase messages {CLMS-VARIABLE} | Both | 6.3.5.1 |
| {CLMS-FIXED} | F=>P | 6.4.3 |
| NOTE: {CLMS-FIXED} is a B-FORMAT message. | | |

6.2.5 Summary of MM messages

Table 5: MM message summary

| | Direction | Clause |
|--|-----------|----------|
| Identity messages | | |
| {TEMPORARY-IDENTITY-ASSIGN} | F=>P | 6.3.6.24 |
| {TEMPORARY-IDENTITY-ASSIGN-ACK} | P=>F | 6.3.6.25 |
| {TEMPORARY-IDENTITY-ASSIGN-REJ} | P=>F | 6.3.6.26 |
| {IDENTITY-REQUEST} | F=>P | 6.3.6.15 |
| {IDENTITY-REPLY} | P=>F | 6.3.6.14 |
| Authentication messages | | |
| {AUTHENTICATION-REQUEST} | Both | 6.3.6.9 |
| {AUTHENTICATION-REPLY} | Both | 6.3.6.8 |
| {AUTHENTICATION-REJECT} | Both | 6.3.6.7 |
| Location messages | | |
| {LOCATE-REQUEST} | P=>F | 6.3.6.19 |
| {LOCATE-ACCEPT} | F=>P | 6.3.6.17 |
| {LOCATE-REJECT} | F=>P | 6.3.6.18 |
| {DETACH} | P=>F | 6.3.6.13 |
| Access rights messages | | |
| {ACCESS-RIGHTS-REQUEST} | P=>F | 6.3.6.3 |
| {ACCESS-RIGHTS-ACCEPT} | F=>P | 6.3.6.1 |
| {ACCESS-RIGHTS-REJECT} | F=>P | 6.3.6.2 |
| {ACCESS-RIGHTS-TERMINATE-REQUEST} | Both | 6.3.6.6 |
| {ACCESS-RIGHTS-TERMINATE-ACCEPT} | Both | 6.3.6.4 |
| {ACCESS-RIGHTS-TERMINATE-REJECT} | Both | 6.3.6.5 |
| Key allocation messages | | |
| {KEY-ALLOCATE} | F=>P | 6.3.6.16 |
| Parameter retrieval messages | | |
| {MM-INFO-SUGGEST} | F=>P | 6.3.6.23 |
| {MM-INFO-REQUEST} | P=>F | 6.3.6.22 |
| {MM-INFO-ACCEPT} | F=>P | 6.3.6.20 |
| {MM-INFO-REJECT} | F=>P | 6.3.6.21 |
| Ciphering messages | | |
| {CIPHER-SUGGEST} | P=>F | 6.3.6.12 |
| {CIPHER-REQUEST} | F=>P | 6.3.6.11 |
| {CIPHER-REJECT} | Both | 6.3.6.10 |
| External protocol messages | | |
| {MM-IWU} | Both | 6.3.6.27 |
| Internal protocol information message | | |
| {MM-NOTIFY} | F=>P | 6.3.6.28 |

6.2.6 Summary of LCE messages

Table 6: LCE message summary

| | Direction | Clause |
|---|-----------|---------|
| LCE establishment messages | | |
| {LCE-REQUEST-PAGE} | F=>P | 6.4.2 |
| {LCE-PAGE-RESPONSE} | P=>F | 6.3.7.1 |
| {LCE-PAGE-REJECT} | F=>P | 6.3.7.2 |
| NOTE: {LCE-REQUEST-PAGE} is a B-FORMAT message. | | |

6.3 S-FORMAT message functional contents

6.3.1 S-FORMAT message overview

Each of the S-FORMAT message definitions includes:

- a) a brief description of the message direction and use;
- b) a table listing all the possible information elements that can be contained in the message. For each element, the table defines:
 - the name of the information element;
 - a reference to the clause where the information element is defined;
 - whether the inclusion of the information element is Mandatory (M) or Optional (O) or Not allowed (N). These inclusion rules are defined separately for each message direction. If the message is only specified for one direction, the elements are marked not applicable (-) for the other direction;
 - the range of possible lengths of the information element.
- c) further explanatory notes as required.

The information elements are always listed in their order of appearance, this order is mandatory for all instances of the message. Receiver implementations shall take account of the possibility that further information elements may be inserted in the message tables in future editions of the present document.

6.3.2 CC-messages

6.3.2.1 {CC-SETUP}

This message is sent to initiate call establishment.

Table 7: {CC-SETUP}

| Message Type | | Format | | Directions |
|---------------------------------------|----------------|----------------|----------------|---------------|
| {CC-INFO} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| Portable identity | 7.7.30 | M | M | 7 to 20 |
| Fixed identity (see note 11) | 7.7.18 | M | M | 5 to 20 |
| NWK assigned identity | 7.7.28 | N | O | 5 to 20 |
| Basic service (see note 1) | 7.6.4 | M | M | 2 |
| Repeat Indicator (see note 3) | 7.6.3 | O | O | 1 |
| IWU attributes (see note 1) | 7.7.21 | M/N | M/N | 6 to 12 |
| Repeat Indicator (see note 2) | 7.6.3 | O | O | 1 |
| Call attributes (see notes 1 and 2) | 7.7.5 | O | O | 6 to 8 |
| Repeat Indicator (see note 3) | 7.6.3 | O | O | 1 |
| Connection attributes (see note 3) | 7.7.11 | O | O | 7 to 12 |
| Cipher info | 7.7.10 | O | O | 4 to 5 |
| Connection identity | 7.7.12 | O | O | ≥ 3 |
| Repeat indicator (see note 12) | 7.6.3 | O | O | 1 |
| Facility | 7.7.15 | O | O | ≥ 4 |
| Repeat indicator (see note 12) | 7.6.3 | O | N | 1 |
| Progress Indicator | 7.7.31 | O | N | 4 |
| "Display" | 7.5.5 | O | N | ≥ 2 |
| "Keypad" (see note 10) | 7.5.5 | N | O | ≥ 2 |
| Signal (see note 5) | 7.6.8 | O | N | 2 |
| Feature Activate | 7.7.16 | N | O | 3 to 4 |
| Feature Indicate | 7.7.17 | O | N | ≥ 4 |
| Network parameter (see note 8) | 7.7.29 | O | O | ≥ 3 |
| Ext h/o indicator | 7.7.51 | O | N | 3 |
| Terminal capability | 7.7.41 | N | O | 6 to 19 |
| End-to-end compatibility (see note 9) | 7.7.14 | O | O | 3 to 6 |
| Rate parameters (see note 7) | 7.7.33 | O | O | 6 to 9 |
| Transit Delay (see note 6) | 7.7.42 | O | O | 4 |
| Window size (see note 6) | 7.7.43 | O | O | 4 to 10 |
| Calling Party Number | 7.7.9 | O | O | ≥ 3 |
| Called Party Number (see note 10) | 7.7.7 | O | O | ≥ 4 |
| Called Party Subaddr | 7.7.8 | O | O | ≥ 4 |
| Sending Complete (see note 4) | 7.6.2 | O | O | 1 |
| Repeat indicator (see note 12) | 7.6.3 | O | O | 1 |
| Segmented info (see note 13) | 7.7.37 | O | O | 4 |
| IWU-TO-IWU | 7.7.23 | O | O | ≥ 4 |
| IWU-PACKET | 7.7.22 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M | = Mandatory; | | | |
| N | = Not allowed; | | | |
| O | = Optional. | | | |

- NOTE 1: The <<IWU-ATTRIBUTES>> is mandatory if the <<BASIC-SERVICE>> element indicates "other". Neither <<IWU-ATTRIBUTES>> nor <<CALL-ATTRIBUTES>> is allowed if the <<BASIC-SERVICE>> element indicates "default attributes".
- NOTE 2: The <<REPEAT-INDICATOR>> information element may optionally be included in front of the <<CALL-ATTRIBUTES>> indicating "prioritized list" for negotiation. Up to three versions of the <<CALL-ATTRIBUTES>> element may then follow. See clause 15.2.
- NOTE 3: If more than one connection is required, a list of <<CONNECTION-ATTRIBUTES>> and or <<IWU-ATTRIBUTES>> may be included preceded by the <<REPEAT-INDICATOR>> element indicating "non-prioritized list". If the <<CONNECTION-ATTRIBUTES>> or <<IWU-ATTRIBUTES>> elements are omitted, the attributes are indirectly defined by reference to the connection(s) indicated by the <<CONNECTION-IDENTITY>> element.
- NOTE 4: Included if the PT or the FT optionally indicates that all information necessary for call establishment is included in the {CC-SETUP} message.
- NOTE 5: Optionally included if the FT optionally provides additional information describing tones.
- NOTE 6: Optionally included for data services whenever these parameters are applicable.
- NOTE 7: Mandatory for call setup of a rate adaption service (see EN 300 175-4 [4]).
- NOTE 8: Included only as part of external handover.
- NOTE 9: Mandatory for services using LU6 (ITU-T Recommendations V.110 [58] and X.30 [60] rate adaption).
- NOTE 10: Called party number information may only be conveyed in the <<CALLED-PARTY-NUMBER>> element. The <<"KEYPAD">> element may only be included to convey other call establishment information.
- NOTE 11: This information element may contain zero length contents if the setup message is used in an ARI-D (GSM/UMTS) environment.
- NOTE 12: The <<REPEAT-INDICATOR>> information element may optionally be included in front of the <<FACILITY>>, <<IWU-to-IWU>> and <<PROGRESS INDICATOR>> information elements indicating "non-prioritized list".
- NOTE 13: The <<Segmented Info>> information element shall be included in front of the <<IWU-TO-IWU>> information element whenever the <<IWU-TO-IWU>> is segmented over a number of consecutive messages.

6.3.2.2 {CC-INFO}

This message is used to transfer additional information between FT and PT both during and after call establishment.

Table 8: {CC-INFO}

| Message Type | Format | Directions | | |
|--|--------|----------------|----------------|---------------|
| {CC-INFO} | S | Both | | |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| Location area (see note 4) | 7.7.25 | N | O | ≥ 3 |
| NWK assigned identity (see note 4) | 7.7.28 | N | O | 5 to 20 |
| Repeat indicator (see note 5) | 7.6.3 | O | O | 1 |
| Facility | 7.7.15 | O | O | ≥ 4 |
| Repeat indicator (see note 5) | 7.6.3 | O | N | 1 |
| Progress Indicator | 7.7.31 | O | N | 4 |
| "Display" | 7.5.5 | O | N | ≥ 2 |
| "Keypad" (see note 1) | 7.5.5 | N | O | ≥ 2 |
| Signal | 7.6.8 | O | N | 2 |
| Feature Activate | 7.7.16 | N | O | 3 to 4 |
| Feature Indicate | 7.7.17 | O | N | ≥ 4 |
| Network parameter (see note 4) | 7.7.29 | O | O | ≥ 3 |
| Ext h/o indicator | 7.7.51 | O | N | 3 |
| Calling Party Number | 7.7.9 | O | O | ≥ 3 |
| Called Party Number (see notes 1 and 3) | 7.7.7 | O | O | ≥ 4 |
| Called Party Subaddr (see note 3) | 7.7.8 | O | O | ≥ 4 |
| Sending Complete (see note 2) | 7.6.2 | O | O | 1 |
| Test Hook Control | 7.6.10 | O | N | 2 |
| Repeat indicator (see note 5) | 7.6.3 | O | O | 1 |
| IWU-TO-IWU | 7.7.23 | O | O | ≥ 4 |
| IWU-PACKET | 7.7.22 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; N = Not allowed; O = Optional. | | | | |
| NOTE 1: The message may contain either the <<CALLED-PARTY-NUMBER>> element or the <<KEYPAD>> element, but not both. NOTE 2: Included if the PT optionally indicates completion of "OVERLAP SENDING" to the FT (or if the FT optionally indicates completion of "OVERLAP RECEIVING" to the PT). NOTE 3: Address elements are only included in messages sent in the "OVERLAP SENDING" state. NOTE 4: Included if requested as part of external handover. NOTE 5: The <<REPEAT-INDICATOR>> information element may optionally be included in front of the <<FACILITY>>, <<IWU-to-IWU>> and <<PROGRESS INDICATOR>> information elements indicating "non-prioritized list". | | | | |

6.3.2.3 {CC-SETUP-ACK}

This message is sent to indicate that call establishment has been indicated, but additional information may be required.

Table 9: {CC-SETUP-ACK}

| Message Type | | Format | | Directions |
|--|--------|----------------|----------------|---------------|
| {CC-SETUP-ACK} | | S | | F=>P |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | - | 1/2 |
| Transaction Identifier | 7.3 | M | - | 1/2 |
| Message Type | 7.4 | M | - | 1 |
| Info type (see note 3) | 7.7.20 | O | - | ≥ 3 |
| Portable identity | 7.7.30 | O | - | 7 to 20 |
| Fixed identity | 7.7.18 | O | - | 5 to 20 |
| Location area | 7.7.25 | O | - | ≥ 3 |
| IWU attributes | 7.7.21 | O | - | 6 to 12 |
| Call Attributes (see note 4) | 7.7.5 | O | - | 6 to 8 |
| Connection attributes | 7.7.11 | O | - | 7 to 12 |
| Connection identity | 7.7.12 | O | - | ≥ 3 |
| Repeat indicator (see note 7) | 7.6.3 | O | - | 1 |
| Facility | 7.7.15 | O | - | ≥ 4 |
| Repeat indicator (see note 7) | 7.6.3 | O | - | 1 |
| Progress Indicator | 7.7.31 | O | - | 4 |
| "Display" | 7.5.5 | O | - | ≥ 2 |
| Signal (see note 2) | 7.6.8 | O | - | 2 |
| Feature Indicate | 7.7.17 | O | - | ≥ 4 |
| Network parameter (see note 8) | 7.7.29 | O | - | ≥ 3 |
| Ext h/o indicator | 7.7.51 | O | - | 3 |
| Transit Delay (see note 5) | 7.7.42 | O | - | 4 |
| Window size (see note 5) | 7.7.43 | O | - | 4 to 10 |
| Delimiter request (see note 6) | 7.6.2 | O | - | 1 |
| Repeat indicator (see note 7) | 7.6.3 | O | - | 1 |
| IWU-TO-IWU | 7.7.23 | O | - | ≥ 4 |
| IWU-PACKET | 7.7.22 | O | - | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | - | ≥ 4 |
| M = Mandatory; O = Optional; - = Not applicable. | | | | |
| NOTE 1: This message may be used in the direction P=>F when using the "INCOMING CALL PROCEEDING" operations. NOTE 2: Included if the FT optionally provides additional information describing tones. NOTE 3: Included if additional external handover parameters are requested. NOTE 4: Included if prioritized list negotiation is used. NOTE 5: Included if operational parameter negotiation is used. NOTE 6: Included by the FT to request use of the <<SENDING-COMPLETE>> element by the PT. NOTE 7: The <<REPEAT-INDICATOR>> information element may optionally be included in front of the <<FACILITY>>, <<IWU-to-IWU>> and <<PROGRESS INDICATOR>> information elements indicating "non-prioritized list". NOTE 8: Included only as part of external handover. | | | | |

6.3.2.4 {CC-CALL-PROC}

This message indicates that the requested (onward) connection establishment has been initiated by the fixed side interworking unit.

Table 10: {CC-CALL-PROC}

| Message Type | Format | Directions | | |
|---|--------|----------------|----------------|---------------|
| {CC-CALL-PROC} | S | F=>P | | |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | - | 1/2 |
| Transaction Identifier | 7.3 | M | - | 1/2 |
| Message Type | 7.4 | M | - | 1 |
| IWU attributes | 7.7.21 | O | - | 5 to 12 |
| Call Attributes (see note 3) | 7.7.5 | O | - | 6 to 8 |
| Connection attributes | 7.7.11 | O | - | 7 to 12 |
| Connection identity | 7.7.12 | O | - | ≥ 3 |
| Repeat indicator (see note 5) | 7.6.3 | O | - | 1 |
| Facility | 7.7.15 | O | - | ≥ 4 |
| Repeat indicator (see note 5) | 7.6.3 | O | - | 1 |
| Progress indicator | 7.7.31 | O | - | 4 |
| "Display" | 7.5.5 | O | - | ≥ 2 |
| Signal (see note 2) | 7.6.8 | O | - | 2 |
| Feature Indicate | 7.7.17 | O | - | ≥ 4 |
| Transit Delay (see note 4) | 7.7.42 | O | - | 4 |
| Window size (see note 4) | 7.7.43 | O | - | 4 to 10 |
| Repeat indicator (see note 5) | 7.6.3 | O | - | 1 |
| IWU-TO-IWU | 7.7.23 | O | - | ≥ 4 |
| IWU-PACKET | 7.7.22 | O | - | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | - | ≥ 4 |
| M = Mandatory; O = Optional; - = Not applicable. | | | | |
| NOTE 1: This message may be used in the direction P=>F when using the "INCOMING CALL PROCEEDING" operations. NOTE 2: Included if the FT optionally provides additional information describing tones. NOTE 3: Included if prioritized list negotiation is used. NOTE 4: Included if operational parameter negotiation is used. NOTE 5: The <<REPEAT-INDICATOR>> information element may optionally be included in front of the <<FACILITY>>, <<IWU-to-IWU>> and <<PROGRESS INDICATOR>> information elements indicating "non-prioritized list". | | | | |

6.3.2.5 {CC-ALERTING}

This message is used to indicate that an initiation of alerting has been reported to the sending entity.

Table 11: {CC-ALERTING}

| Message Type | | Format | | Directions |
|---|--------|----------------|----------------|---------------|
| {CC-ALERTING} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| IWU attributes | 7.7.21 | O | O | 6 to 12 |
| Call Attributes (see note 2) | 7.7.5 | O | O | 6 to 8 |
| Connection attributes | 7.7.11 | O | O | 7 to 12 |
| Connection identity | 7.7.12 | O | O | ≥ 3 |
| Repeat indicator (see note 4) | 7.6.3 | O | O | 1 |
| Facility | 7.7.15 | O | O | ≥ 4 |
| Repeat indicator (see note 4) | 7.6.3 | O | N | 1 |
| Progress Indicator | 7.7.31 | O | N | 4 |
| "Display" | 7.5.5 | O | N | ≥ 2 |
| Signal (see note 1) | 7.6.8 | O | N | 2 |
| Feature Indicate | 7.7.17 | O | N | ≥ 4 |
| Terminal capability | 7.7.41 | N | O | 6 to 19 |
| Transit Delay (see note 3) | 7.7.42 | O | O | 4 |
| Window size (see note 3) | 7.7.43 | O | O | 4 to 10 |
| Repeat indicator (see note 4) | 7.6.3 | O | O | 1 |
| IWU-TO-IWU | 7.7.23 | O | O | ≥ 4 |
| IWU-PACKET | 7.7.22 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; N = Not allowed; O = Optional. | | | | |
| NOTE 1: Included if the FT optionally provides additional information describing tones. NOTE 2: Included if prioritized list negotiation is used. NOTE 3: Included if operational parameter negotiation is used. NOTE 4: The <<REPEAT-INDICATOR>> information element may optionally be included in front of the <<FACILITY>>, <<IWU-to-IWU>> and <<PROGRESS INDICATOR>> information elements indicating "non-prioritized list". | | | | |

6.3.2.6 {CC-CONNECT}

This message is sent by the FT to indicate completion of the connection through the DECT network, and by the PT to request such completion.

Table 12: {CC-CONNECT}

| Message Type | | Format | | Directions |
|---|--------|----------------|----------------|---------------|
| {CC-CONNECT} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| IWU attributes | 7.7.21 | O | O | 6 to 12 |
| Call Attributes (see note 2) | 7.7.5 | O | O | 6 to 8 |
| Connection attributes | 7.7.11 | O | O | 7 to 12 |
| Connection identity | 7.7.12 | O | O | ≥ 3 |
| Repeat indicator (see note 4) | 7.6.3 | O | O | 1 |
| Facility | 7.7.15 | O | O | ≥ 4 |
| Repeat indicator (see note 4) | 7.6.3 | O | N | 1 |
| Progress Indicator | 7.7.31 | O | N | 4 |
| "Display" | 7.5.5 | O | N | ≥ 2 |
| Signal (see note 1) | 7.6.8 | O | N | 2 |
| Feature Indicate | 7.7.17 | O | N | ≥ 4 |
| Network parameter (see note 5) | 7.7.29 | O | N | ≥ 3 |
| Ext h/o indicator | 7.7.51 | O | N | 3 |
| Terminal capability | 7.7.41 | N | O | 6 to 19 |
| Transit Delay (see note 3) | 7.7.42 | O | O | 4 |
| Window size (see note 3) | 7.7.43 | O | O | 4 to 10 |
| Repeat indicator (see note 4) | 7.6.3 | O | O | 1 |
| Segmented info (see note 6) | 7.7.37 | O | O | 4 |
| IWU-TO-IWU | 7.7.23 | O | O | ≥ 4 |
| IWU-PACKET | 7.7.22 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; N = Not allowed; O = Optional. | | | | |
| NOTE 1: Included if the FT optionally provides additional information describing tones. NOTE 2: Included if prioritized list negotiation is used. NOTE 3: Included if operational parameter negotiation is used. NOTE 4: The <<REPEAT-INDICATOR>> information element may optionally be included in front of the <<FACILITY>>, <<IWU-to-IWU>> and <<PROGRESS INDICATOR>> information elements indicating "non-prioritized list". NOTE 5: Included only as part of external handover. NOTE 6: The <<Segmented Info>> information element shall be included in front of the <<IWU-TO-IWU>> information element whenever the <<IWU-TO-IWU>> is segmented over a number of consecutive messages. | | | | |

6.3.2.7 {CC-CONNECT-ACK}

This message is sent by the FT to confirm completion of the connection through the DECT network, following a {CC-CONNECT} message requesting such completion. This message is also sent by the PT to confirm connection of the call following a {CC-CONNECT} message in an external handover procedure.

Table 13: {CC-CONNECT-ACK}

| Message Type | | Format | | Directions |
|--|--------|----------------|----------------|---------------|
| {CC-CONNECT-ACK} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| "Display" | 7.5.5 | O | N | ≥ 2 |
| Feature Indicate | 7.7.17 | O | N | ≥ 4 |
| Repeat indicator (see note) | 7.6.3 | O | O | 1 |
| IWU-TO-IWU | 7.7.23 | O | O | ≥ 4 |
| IWU-PACKET | 7.7.22 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; O = Optional; - = Not applicable. | | | | |
| NOTE: The <<REPEAT-INDICATOR>> information element may optionally be included in front of the <<IWU-to-IWU>> information elements indicating "non-prioritized list". | | | | |

6.3.2.8 {CC-RELEASE}

This message is sent to indicate that the sending entity wishes to release the call and the call references, and to request the receiving entity to complete a corresponding release after returning a {CC-RELEASE-COM} message.

Table 14: {CC-RELEASE}

| Message Type | | Format | | Directions |
|---|--------|----------------|----------------|---------------|
| {CC-RELEASE} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| Release Reason | 7.6.7 | O | O | 2 |
| Repeat indicator (see note 1) | 7.6.3 | O | O | 1 |
| Facility | 7.7.15 | O | O | ≥ 4 |
| Repeat indicator (see note 1) | 7.6.3 | O | O | 1 |
| Progress indicator | 7.7.31 | O | O | 4 |
| "Display" | 7.5.5 | O | N | ≥ 2 |
| Feature Indicate | 7.7.17 | O | N | ≥ 4 |
| Repeat indicator (see note 1) | 7.6.3 | O | N | 1 |
| Segmented info (see note 2) | 7.7.37 | O | O | 4 |
| IWU-TO-IWU | 7.7.23 | O | O | ≥ 4 |
| IWU-PACKET | 7.7.22 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; N = Not allowed; O = Optional. | | | | |
| NOTE 1: The <<REPEAT-INDICATOR>> information element may optionally be included in front of the <<FACILITY>>, <<IWU-to-IWU>> and <<PROGRESS INDICATOR>> information elements indicating "non-prioritized list". | | | | |
| NOTE 2: The <<Segmented Info>> information element shall be included in front of the <<IWU-TO-IWU>> information element whenever the <<IWU-TO-IWU>> is segmented over a number of consecutive messages. | | | | |

6.3.2.9 {CC-RELEASE-COM}

This message indicates that the sending entity has released the call and the call reference, and the receiving entity shall release the call and call reference.

Table 15: {CC-RELEASE-COM}

| Message Type | | Format | | Directions |
|---|--------|----------------|----------------|---------------|
| {CC-RELEASE-COM} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| Release Reason | 7.6.7 | O | O | 2 |
| Identity type (see note 3) | 7.7.19 | O | N | 4 |
| Location area (see note 3) | 7.7.25 | O | N | ≥ 3 |
| IWU attributes (see note 1) | 7.7.21 | O | O | 6 to 12 |
| Connection attributes (see note 1) | 7.7.11 | O | O | 7 to 12 |
| Repeat indicator (see note 4) | 7.6.3 | O | O | 1 |
| Facility | 7.7.15 | O | O | ≥ 4 |
| "Display" | 7.5.5 | O | N | ≥ 2 |
| Feature Indicate | 7.7.17 | O | N | ≥ 4 |
| Network parameter (see note 2) | 7.7.29 | O | N | ≥ 3 |
| Repeat indicator (see note 4) | 7.6.3 | O | O | 1 |
| Segmented info (see note 5) | 7.7.37 | O | O | 4 |
| IWU-TO-IWU | 7.7.23 | O | O | ≥ 4 |
| IWU-PACKET | 7.7.22 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; | | | | |
| N = Not allowed; | | | | |
| O = Optional. | | | | |
| NOTE 1: The <<IWU-ATTRIBUTES>> and the <CONNECTION ATTRIBUTES> elements are only included if exchanged attribute negotiation is supported. See clause 15.2.3. | | | | |
| NOTE 2: Mandatory when responding to an external handover release. | | | | |
| NOTE 3: Optional when responding to an external handover release. | | | | |
| NOTE 4: The <<REPEAT-INDICATOR>> information element may optionally be included in front of the <<FACILITY>>, and <<IWU-to-IWU>> information elements indicating "non-prioritized list". | | | | |
| NOTE 5: The <<Segmented Info>> information element shall be included in front of the <<IWU-TO-IWU>> information element whenever the <<IWU-TO-IWU>> is segmented over a number of consecutive messages. | | | | |

6.3.2.10 {CC-SERVICE-CHANGE}

This message is used to request a service change to an existing call.

Table 16: {CC-SERVICE-CHANGE}

| Message Type | | Format | | Directions |
|--|--------|----------------|----------------|---------------|
| {CC-SERVICE-CHANGE} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| Portable identity | 7.7.30 | M | M | 7 to 20 |
| IWU attributes | 7.7.21 | O | O | 6 to 12 |
| Service Change Info | 7.7.38 | M | M | 4 to 5 |
| Call attributes | 7.7.5 | O | O | 6 to 8 |
| Repeat Indicator (see note 1) | 7.6.3 | O | O | 1 |
| Connection Attributes (see note 1) | 7.7.11 | M/O | M/O | 7 to 12 |
| Connection identity (see note 2) | 7.7.12 | M/O | M/O | ≥ 3 |
| Repeat indicator (see note 3) | 7.6.3 | O | O | 1 |
| Segmented info (see note 4) | 7.7.37 | O | O | 4 |
| IWU-TO-IWU | 7.7.23 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; O = Optional. | | | | |
| NOTE 1: The <<CONNECTION-ATTRIBUTES>> element is mandatory for certain service changes. See clause 9.6. If more than one connection is affected, a list of <<CONNECTION-ATTRIBUTES>> may be included preceded by the <<REPEAT-INDICATOR>> element indicating "non-prioritized list". | | | | |
| NOTE 2: The <<CONNECTION-IDENTITY>> element is mandatory for certain service changes. See clause 9.6. | | | | |
| NOTE 3: The <<REPEAT-INDICATOR>> information element may optionally be included in front of the <<IWU-TO-IWU>> information elements indicating "non-prioritized list". | | | | |
| NOTE 4: The <<Segmented Info>> information element shall be included in front of the <<IWU-TO-IWU>> information element whenever the <<IWU-TO-IWU>> is segmented over a number of consecutive messages. | | | | |

6.3.2.11 {CC-SERVICE-ACCEPT}

This message is used to accept a service change to an existing call.

Table 17: {CC-SERVICE-ACCEPT}

| Message Type | | Format | | Directions |
|---|--------|----------------|----------------|---------------|
| {CC-SERVICE-ACCEPT} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| IWU attributes | 7.7.21 | O | O | 6 to 12 |
| Connection identity (see note 1) | 7.7.12 | O | O | ≥ 3 |
| Repeat indicator (see note 2) | 7.6.3 | O | O | 1 |
| Segmented info (see note 3) | 7.7.37 | O | O | 4 |
| IWU-TO-IWU | 7.7.23 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; O = Optional. | | | | |
| NOTE 1: The <<CONNECTION-IDENTITY>> element is mandatory for certain service changes. See clause 9.6.4. | | | | |
| NOTE 2: The <<REPEAT-INDICATOR>> information element may optionally be included in front of the <<IWU-TO-IWU>> information elements indicating "non-prioritized list". | | | | |
| NOTE 3: The <<Segmented Info>> information element shall be included in front of the <<IWU-TO-IWU>> information element whenever the <<IWU-TO-IWU>> is segmented over a number of consecutive messages. | | | | |

6.3.2.12 {CC-SERVICE-REJECT}

This message is used to reject a service change to an existing call.

Table 18: {CC-SERVICE-REJECT}

| Message Type | | Format | | Directions |
|---|--------|----------------|----------------|---------------|
| {CC-SERVICE-REJECT} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| Release Reason | 7.6.7 | O | O | 2 |
| IWU attributes | 7.7.21 | O | O | 6 to 12 |
| Connection attributes | 7.7.11 | O | O | 7 to 12 |
| Repeat indicator (see note 1) | 7.6.3 | O | O | 1 |
| Segmented info (see note 2) | 7.7.37 | O | O | 4 |
| IWU-TO-IWU | 7.7.23 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory. | | | | |
| NOTE 1: The <<REPEAT-INDICATOR>> information element may optionally be included in front of the <<IWU-TO-IWU>> information elements indicating "non-prioritized list". | | | | |
| NOTE 2: The <<Segmented Info>> information element shall be included in front of the <<IWU-TO-IWU>> information element whenever the <<IWU-TO-IWU>> is segmented over a number of consecutive messages. | | | | |

6.3.2.13 {CC-NOTIFY}

This message is used to exchange internal protocol information without causing a state change.

Table 19: {CC-NOTIFY}

| Message Type | | Format | | Directions |
|--|--------|----------------|----------------|---------------|
| {CC-NOTIFY} | | S | | F=>P |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | - | 1/2 |
| Transaction Identifier | 7.3 | M | - | 1/2 |
| Message Type | 7.4 | M | - | 1 |
| Timer Restart | 7.6.9 | O | - | 2 |
| Escape to proprietary | 7.7.45 | O | - | ≥ 4 |
| M = Mandatory; O = Optional; - = Not applicable. | | | | |

6.3.2.14 {IWU-INFO}

This message is used to exchange (or reject) external protocol information in a transparent manner.

Table 20: {IWU-INFO}

| Message Type | | Format | | Directions |
|---|--------|----------------|----------------|---------------|
| {IWU-INFO} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| Portable identity | 7.7.30 | O | O | 7 to 20 |
| MMS Generic Header | 7.7.47 | O | O | ≥ 2 |
| MMS Object Header | 7.7.48 | O | O | ≥ 2 |
| Repeat Indicator (see note 1) | 7.6.3 | O | O | 1 |
| MMS Extended Header | 7.7.49 | O | O | ≥ 2 |
| Repeat Indicator (see note 1) | 7.6.3 | O | O | 1 |
| Time-Date | 7.7.50 | O | O | 6 to 10 |
| Repeat Indicator (see note 1) | 7.6.3 | O | O | 1 |
| Calling Party Number | 7.7.9 | O | O | ≥ 3 |
| Repeat Indicator (see note 1) | 7.6.3 | O | O | 1 |
| Called Party Number | 7.7.7 | O | O | ≥ 4 |
| Called Party Subaddr | 7.7.8 | O | O | ≥ 4 |
| Segmented info | 7.7.37 | O | O | 4 |
| Alphanumeric | 7.7.3 | O | O | ≥ 4 |
| Repeat Indicator (see note 1) | 7.6.3 | O | O | 1 |
| Segmented info (see note 2) | 7.7.37 | O | O | 4 |
| IWU-TO-IWU | 7.7.23 | O | O | ≥ 4 |
| Segmented info (see note 2) | 7.7.37 | O | O | 4 |
| IWU-PACKET | 7.7.22 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; O = Optional. | | | | |
| NOTE 1: The <<REPEAT-INDICATOR>> information element may optionally be included in front of the <<MMS EXTENDED HEADER>>, <<TIME-DATE>> and <<CALLING PARTY NUMBER>> and <<CALLED PARTY NUMBER>>, and <<IWU-TO-IWU>> information elements indicating "non-prioritized list". | | | | |
| NOTE 2: The <<Segmented Info>> information element shall be included in front of the <<IWU-TO-IWU>> or <<IWU-PACKET>> information element whenever the IE is segmented over a number of consecutive messages. | | | | |

6.3.3 SS-messages (call related and call independent)

6.3.3.1 {FACILITY}

This message may be sent to request or acknowledge a supplementary service. The supplementary service to be invoked, and its associated parameters, are specified in the <<FACILITY>> information element.

Table 21: {FACILITY}

| Message Type | | Format | | Directions |
|--|--------|----------------|----------------|---------------|
| {FACILITY} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| Repeat indicator (see note) | 7.6.3 | O | O | 1 |
| Facility | 7.7.15 | O | O | ≥ 4 |
| "Display" | 7.5.5 | O | N | ≥ 2 |
| "Keypad" | 7.5.5 | N | O | ≥ 2 |
| Feature Activate | 7.7.16 | N | O | 3 to 4 |
| Feature Indicate | 7.7.17 | O | N | ≥ 4 |
| Repeat indicator (see note) | 7.6.3 | O | O | 1 |
| IWU-TO-IWU | 7.7.23 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; N = Not allowed; O = Optional. | | | | |
| NOTE: The <<REPEAT-INDICATOR>> information element may optionally be included in front of the <<FACILITY>>, and <<IWU-to-IWU>> information elements indicating "non-prioritized list". | | | | |

6.3.3.2 {HOLD}

This message is sent by the FT or PT to request the hold function for an existing call.

Table 22: {HOLD}

| Message Type | | Format | | Directions |
|---|--------|----------------|----------------|---------------|
| {HOLD} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| "Display" | 7.5.5 | O | N | ≥ 2 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; N = Not allowed; O = Optional. | | | | |

6.3.3.3 {HOLD-ACK}

This message is sent by the FT or PT to indicate that the hold function has been successfully performed.

Table 23: {HOLD-ACK}

| Message Type | | Format | Directions | |
|---|--------|----------------|----------------|---------------|
| {HOLD-ACK} | | S | Both | |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| "Display" | 7.5.5 | O | N | ≥ 2 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; N = Not allowed; O = Optional. | | | | |

6.3.3.4 {HOLD-REJECT}

This message is sent by the FT or PT to indicate the denial of a request to hold a call.

Table 24: {HOLD-REJECT}

| Message Type | | Format | Directions | |
|--|--------|----------------|----------------|---------------|
| {HOLD-REJECT} | | S | Both | |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| "Display" | 7.5.5 | O | N | ≥ 2 |
| Reject Reason | 7.7.34 | O | O | 3 |
| Repeat indicator (see note) | 7.6.3 | O | O | 1 |
| IWU-TO-IWU | 7.7.23 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; N = Not allowed; O = Optional. | | | | |
| NOTE: The <<REPEAT-INDICATOR>> information element may optionally be included in front of the <<IWU-to-IWU>> information elements indicating "non-prioritized list". | | | | |

6.3.3.5 {RETRIEVE}

This message is sent by the FT or PT to request the retrieval of a held call.

Table 25: {RETRIEVE}

| Message Type | | Format | Directions | |
|---|--------|----------------|----------------|---------------|
| {RETRIEVE} | | S | Both | |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| "Display" | 7.5.5 | O | N | ≥ 2 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; N = Not allowed; O = Optional. | | | | |

6.3.3.6 {RETRIEVE-ACK}

This message is sent by the FT or PT to indicate that the retrieve function has been successfully performed.

Table 26: {RETRIEVE-ACK}

| Message Type | | Format | Directions | |
|---|--------|----------------|----------------|---------------|
| {RETRIEVE-ACK} | | S | Both | |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| "Display" | 7.5.5 | O | N | ≥ 2 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; N = Not allowed; O = Optional. | | | | |

6.3.3.7 {RETRIEVE-REJECT}

This message is sent by the FT or PT to indicate the inability to perform the requested retrieve function.

Table 27: {RETRIEVE-REJECT}

| Message Type | | Format | Directions | |
|--|--------|----------------|----------------|---------------|
| {RETRIEVE-REJECT} | | S | Both | |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| "Display" | 7.5.5 | O | N | ≥ 2 |
| Reject Reason | 7.7.34 | O | O | 3 |
| Repeat indicator (see note) | 7.6.3 | O | O | 1 |
| IWU-TO-IWU | 7.7.23 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; N = Not allowed; O = Optional. | | | | |
| NOTE: The <<REPEAT-INDICATOR>> information element may optionally be included in front of the <<IWU-to-IWU>> information elements indicating "non-prioritized list". | | | | |

6.3.3.8 {CISS-REGISTER}

This message is sent by the FT or PT to assign a new TI for non-call associated transactions.

Table 28: {CISS-REGISTER}

| Message Type | | Format | | Directions |
|--|--------|----------------|----------------|---------------|
| {CISS-REGISTER} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| Portable identity (see note 1) | 7.7.30 | O | M | 7 to 20 |
| Repeat indicator (see note 2) | 7.6.3 | O | O | 1 |
| Facility | 7.7.15 | O | O | ≥ 4 |
| "Display" | 7.5.5 | O | N | ≥ 2 |
| "Keypad" | 7.5.5 | N | O | ≥ 2 |
| Feature Activate | 7.7.16 | N | O | 3 to 4 |
| Feature Indicate | 7.7.17 | O | N | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; | | | | |
| N = Not allowed; | | | | |
| O = Optional. | | | | |
| NOTE 1: For Call Independent Supplementary Services the FP may not be able to derive the Portable Identity if this information element is not included. | | | | |
| NOTE 2: The <<REPEAT-INDICATOR>> information element may optionally be included in front of the <<FACILITY>> information elements indicating "non-prioritized list". | | | | |

6.3.3.9 {CISS-RELEASE-COM}

This message indicates that the sending entity has released the CISS-transaction and the transaction identifier, and the receiving entity shall release the CISS-transaction and the transaction identifier.

Table 29: {CISS-RELEASE-COM}

| Message Type | | Format | | Directions |
|--|--------|----------------|----------------|---------------|
| {CISS-RELEASE-COM} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| Release Reason | 7.6.7 | O | O | 2 |
| Repeat indicator (see note) | 7.6.3 | O | O | 1 |
| Facility | 7.7.15 | O | O | ≥ 4 |
| "Display" | 7.5.5 | O | N | ≥ 2 |
| "Keypad" | 7.5.5 | N | O | ≥ 2 |
| Feature Activate | 7.7.16 | N | O | 3 to 4 |
| Feature Indicate | 7.7.17 | O | N | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; | | | | |
| N = Not allowed; | | | | |
| O = Optional. | | | | |
| NOTE: The <<REPEAT-INDICATOR>> information element may optionally be included in front of the <<FACILITY>> information elements indicating "non-prioritized list". | | | | |

6.3.4 COMS-messages

6.3.4.1 {COMS-SETUP}

This message is used to initiate a COMS call.

Table 30: {COMS-SETUP}

| Message Type | | Format | | Directions |
|--|--------|----------------|----------------|---------------|
| {COMS-SETUP} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2. | M | M | 1/2 |
| Transaction Identifier | 7.3. | M | M | 1/2 |
| Message Type | 7.4. | M | M | 1 |
| Portable identity (see note) | 7.7.30 | M | M | 7 to 20 |
| Fixed identity (see note) | 7.7.18 | M | M | 5 to 20 |
| IWU attributes | 7.7.21 | M | M | 6 to 12 |
| Connection attributes | 7.7.11 | O | O | 7 to 12 |
| "Display" | 7.5.5 | O | N | ≥ 2 |
| Called Party Number | 7.7.7 | O | O | ≥ 4 |
| Called Party Subaddr | 7.7.8 | O | O | ≥ 4 |
| IWU-TO-IWU | 7.7.23 | O | O | ≥ 4 |
| IWU-PACKET | 7.7.22 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; N = Not allowed; O = Optional. | | | | |
| NOTE: <<Portable identity>> and <<Fixed identity>> are mandatory for direct data link establishment (see clause 14.2). | | | | |

6.3.4.2 {COMS-INFO}

This message is used to transfer information as part of a COMS call.

Table 31: {COMS-INFO}

| Message Type | | Format | | Directions |
|---|--------|----------------|----------------|---------------|
| {COMS-INFO} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| "Display" | 7.5.5 | O | N | ≥ 2 |
| Segmented info (see note) | 7.7.37 | O | O | 4 |
| Alphanumeric | 7.7.3 | O | O | ≥ 4 |
| IWU-TO-IWU | 7.7.23 | O | O | ≥ 4 |
| IWU-PACKET | 7.7.22 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; N = Not allowed; O = Optional. | | | | |
| NOTE: The <<SEGMENTED-INFO>> element is used if the complete information cannot be fitted into one message. | | | | |

6.3.4.3 {COMS-ACK}

This message is used to acknowledge the successful receipt of a complete COMS message as received in one or more {COMS-INFO} messages.

Table 32: {COMS-ACK}

| Message Type | | Format | | Directions |
|---|--------|----------------|----------------|---------------|
| {COMS-ACK} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| "Display" | 7.5.5 | O | N | ≥ 2 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; N = Not allowed; O = Optional. | | | | |

6.3.4.4 {COMS-CONNECT}

The message is used in signal acceptance of a COMS call.

Table 33: {COMS-CONNECT}

| Message Type | | Format | | Directions |
|---|--------|----------------|----------------|---------------|
| {COMS-CONNECT} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| "Display" | 7.5.5 | O | N | ≥ 2 |
| IWU-TO-IWU | 7.7.23 | O | O | ≥ 4 |
| IWU-PACKET | 7.7.22 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; N = Not allowed; O = Optional. | | | | |

6.3.4.5 {COMS-RELEASE}

This message is used to indicate that the sending entity wishes to release a COMS call.

Table 34: {COMS-RELEASE}

| Message Type | | Format | | Directions |
|------------------------|----------------|----------------|----------------|---------------|
| {COMS-RELEASE} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| Release Reason | 7.6.7 | O | O | 2 |
| "Display" | 7.5.5 | O | N | ≥ 2 |
| IWU-TO-IWU | 7.7.23 | O | O | ≥ 4 |
| IWU-PACKET | 7.7.22 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M | = Mandatory; | | | |
| N | = Not allowed; | | | |
| O | = Optional. | | | |

6.3.4.6 {COMS-RELEASE-COM}

This message indicates that the sending entity has released the COMS call and that the receiving entity shall release all call references.

Table 35: {COMS-RELEASE-COM}

| Message Type | | Format | | Directions |
|------------------------|----------------|----------------|----------------|---------------|
| {COMS-RELEASE-COM} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| Release Reason | 7.6.7 | O | O | 2 |
| "Display" | 7.5.5 | O | N | ≥ 2 |
| IWU-TO-IWU | 7.7.23 | O | O | ≥ 4 |
| IWU-PACKET | 7.7.22 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M | = Mandatory; | | | |
| N | = Not allowed; | | | |
| O | = Optional. | | | |

6.3.4.7 {COMS-NOTIFY}

This message is used to exchange internal protocol information without causing a state change.

Table 36: {COMS-NOTIFY}

| Message Type | | Format | | Directions |
|------------------------|-------------------|----------------|----------------|---------------|
| {COMS-NOTIFY} | | S | | F=>P |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | - | 1/2 |
| Transaction Identifier | 7.3 | M | - | 1/2 |
| Message Type | 7.4 | M | - | 1 |
| Timer Restart | 7.6.9 | O | - | 2 |
| Escape to proprietary | 7.7.45 | O | - | ≥ 4 |
| M | = Mandatory; | | | |
| O | = Optional; | | | |
| - | = Not applicable. | | | |

6.3.5 CLMS-message

6.3.5.1 {CLMS-VARIABLE}

Table 37: {CLMS-VARIABLE}

| Message Type | | Format | | Directions |
|---------------------------|---|----------------|----------------|---------------|
| {CLMS-VARIABLE} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| Portable identity | 7.7.30 | M | M | 7 to 20 |
| MMS Generic Header | 7.7.47 | O | O | ≥ 2 |
| MMS Object Header | 7.7.48 | O | O | ≥ 2 |
| Repeat Indicator | 7.6.3 | O | O | 1 |
| MMS Extended Header | 7.7.49 | O | O | ≥ 2 |
| Repeat Indicator | 7.6.3 | O | O | 1 |
| Time-Date | 7.7.50 | O | O | 6 to 10 |
| Repeat Indicator | 7.6.3 | O | O | 1 |
| Calling Party Number | 7.7.9 | O | O | ≥ 3 |
| Repeat Indicator | 7.6.3 | O | O | 1 |
| Called Party Number | 7.7.7 | O | O | ≥ 4 |
| Called Party Subaddr | 7.7.8 | O | O | ≥ 4 |
| Segmented-Info (see note) | 7.7.37 | O | O | 4 |
| Alphanumeric | 7.7.3 | O | O | ≥ 4 |
| IWU-TO-IWU | 7.7.23 | O | O | ≥ 4 |
| IWU-PACKET | 7.7.22 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M | = Mandatory; | | | |
| O | = Optional. | | | |
| NOTE: | The <<SEGMENTED-INFO>> element is used if the complete information cannot be fitted into one message. | | | |

6.3.6 MM-messages

6.3.6.1 {ACCESS-RIGHTS-ACCEPT}

This message is sent by the FT to the PT to transfer the access rights parameters to the PT.

Table 38: {ACCESS-RIGHTS-ACCEPT}

| Message Type | | Format | | Directions |
|---------------------------------|--|----------------|----------------|---------------|
| {ACCESS-RIGHTS-ACCEPT} | | S | | F=>P |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | - | 1/2 |
| Transaction Identifier | 7.3 | M | - | 1/2 |
| Message Type | 7.4 | M | - | 1 |
| Portable identity | 7.7.30 | M | - | 7 to 20 |
| Repeat Indicator (see note) | 7.6.3 | O | - | 1 |
| Fixed identity(PARK) (see note) | 7.7.18 | M | - | 5 to 20 |
| Location area | 7.7.25 | O | - | ≥ 3 |
| AUTH-TYPE | 7.7.4 | O | - | 5 to 6 |
| Cipher info | 7.7.10 | O | - | 4 to 5 |
| ZAP field | 7.7.44 | O | - | 3 |
| Service class | 7.7.39 | O | - | 3 |
| Setup capability | 7.7.40 | O | - | 4 |
| Model identifier | 7.7.46 | O | - | 5 to 20 |
| IWU-TO-IWU | 7.7.23 | O | - | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | - | ≥ 4 |
| M | = Mandatory; | | | |
| N | = Not allowed; | | | |
| O | = Optional; | | | |
| - | = Not applicable. | | | |
| NOTE: | More than one PARK can be transmitted by using the <<REPEAT-INDICATOR>> information elements. In this case the coding for "non-prioritized list" should be used. Not more than 5 PARKs should be included. | | | |

6.3.6.2 {ACCESS-RIGHTS-REJECT}

This message is sent by the FT to the PT to indicate that the access rights parameters cannot be transferred.

Table 39: {ACCESS-RIGHTS-REJECT}

| Message Type | | Format | | Directions |
|------------------------|-------------------|----------------|----------------|---------------|
| {ACCESS-RIGHTS-REJECT} | | S | | F=>P |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | - | 1/2 |
| Transaction Identifier | 7.3 | M | - | 1/2 |
| Message Type | 7.4 | M | - | 1 |
| Reject Reason | 7.7.34 | O | - | 3 |
| Duration | 7.7.13 | O | - | 4 |
| IWU-TO-IWU | 7.7.23 | O | - | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | - | ≥ 4 |
| M | = Mandatory; | | | |
| O | = Optional; | | | |
| - | = Not applicable. | | | |

6.3.6.3 {ACCESS-RIGHTS-REQUEST}

This message is sent by the PT to the FT to request from the FT to send the access rights parameters in a subsequent {ACCESS-RIGHTS-ACCEPT} message.

Table 40: {ACCESS-RIGHTS-REQUEST}

| Message Type | | Format | | Directions |
|--|--------|----------------|----------------|---------------|
| {ACCESS-RIGHTS-REQUEST} | | S | | P=>F |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | - | M | 1/2 |
| Transaction Identifier | 7.3 | - | M | 1/2 |
| Message Type | 7.4 | - | M | 1 |
| Portable identity | 7.7.30 | - | M | 7 to 20 |
| AUTH-TYPE | 7.7.4 | - | O | 5 to 6 |
| Cipher info | 7.7.10 | - | O | 4 to 5 |
| Setup capability | 7.7.40 | - | O | 4 |
| Terminal capability | 7.7.41 | - | O | 6 to 19 |
| IWU-TO-IWU | 7.7.23 | - | O | ≥ 4 |
| Model identifier | 7.7.46 | - | O | 5 to 20 |
| Escape to proprietary | 7.7.45 | - | O | ≥ 4 |
| M = Mandatory; O = Optional; - = Not applicable. | | | | |

6.3.6.4 {ACCESS-RIGHTS-TERMINATE-ACCEPT}

This message is sent by the FT or PT to indicate that the access rights parameters have been erased.

Table 41: {ACCESS-RIGHTS-TERMINATE-ACCEPT}

| Message Type | | Format | | Directions |
|----------------------------------|--------|----------------|----------------|---------------|
| {ACCESS-RIGHTS-TERMINATE-ACCEPT} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; O = Optional. | | | | |

6.3.6.5 {ACCESS-RIGHTS-TERMINATE-REJECT}

This message is sent by the FT or PT to indicate that the access rights parameters have not been erased.

Table 42: {ACCESS-RIGHTS-TERMINATE-REJECT}

| Message Type | | Format | | Directions |
|----------------------------------|----------------|----------------|----------------|---------------|
| {ACCESS-RIGHTS-TERMINATE-REJECT} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| Reject Reason | 7.7.34 | O | O | 3 |
| Duration | 7.7.13 | O | N | 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M | = Mandatory; | | | |
| N | = Not allowed; | | | |
| O | = Optional. | | | |

6.3.6.6 {ACCESS-RIGHTS-TERMINATE-REQUEST}

This message is sent by the FT or PT to request the erasure of the access rights parameters.

Table 43: {ACCESS-RIGHTS-TERMINATE-REQUEST}

| Message Type | | Format | | Directions |
|-----------------------------------|--------------|----------------|----------------|---------------|
| {ACCESS-RIGHTS-TERMINATE-REQUEST} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| Portable identity | 7.7.30 | M | M | 7 to 20 |
| Repeat Indicator | 7.6.3 | O | O | 1 |
| Fixed identity (PARK) | 7.7.18 | O | O | 5 to 20 |
| IWU-TO-IWU | 7.7.23 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M | = Mandatory; | | | |
| O | = Optional. | | | |

A list of <<FIXED-IDENTITY>> information elements (PARKs) can be included by using the <<REPEAT-INDICATOR>> information element. In this case the coding for "non-prioritized list" shall be used. Not more than 3 PARKs should be included.

6.3.6.7 {AUTHENTICATION-REJECT}

This message is sent by the FT or PT to indicate that authentication has failed or cannot be done.

Table 44: {AUTHENTICATION-REJECT}

| Message Type | | Format | | Directions |
|--|--------|----------------|----------------|---------------|
| {AUTHENTICATION-REJECT} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| Repeat Indicator (see note) | 7.6.3 | O | O | 1 |
| AUTH-TYPE (see note) | 7.7.4 | O | O | 5 to 6 |
| Reject Reason | 7.7.34 | O | O | 3 |
| Authentication Reject Parameter | 7.7.52 | N | O | ≥ 2 |
| Repeat indicator | 7.6.3 | O | O | 1 |
| IWU-TO-IWU | 7.7.23 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; O = Optional. | | | | |
| NOTE: Instead of one <<AUTH-TYPE>> information element also a prioritized list of <<AUTH-TYPE>> information elements can be included by using the <<REPEAT-INDICATOR>> information element. Not more than 3 <<AUTH-TYPE>> information elements should be included. | | | | |

6.3.6.8 {AUTHENTICATION-REPLY}

This message is sent by the FT or PT to deliver a calculated response.

Table 45: {AUTHENTICATION-REPLY}

| Message Type | | Format | | Directions |
|--|--------|----------------|----------------|---------------|
| {AUTHENTICATION-REPLY} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| RES (see note 1) | 7.7.35 | M | M | 6 |
| RS (see notes 1 and 2) | 7.7.36 | M/O | N | 10 |
| ZAP field (see note 3) | 7.7.44 | N | M/O | 3 |
| Service class (see note 4) | 7.7.39 | N | M/O | 3 |
| Key | 7.7.24 | N | O | ≥ 4 |
| Repeat indicator | 7.6.3 | O | O | 1 |
| IWU-TO-IWU | 7.7.23 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; N = Not allowed; O = Optional. | | | | |
| NOTE 1: The length when a DECT Standard Authentication Algorithm (DSAA) is used. | | | | |
| NOTE 2: If this message is used in the FT authentication procedure and a DECT Standard Authentication Algorithm (DSAA) is used, then the <<RS>> information element is mandatory in the direction FT to PT. If this message is used in the key allocation procedure, then the <<RS>> information element should not be included. | | | | |
| NOTE 3: If the PT has stored a ZAP field that is related to the current active IPUI, then the <<ZAP-FIELD>> information element is mandatory in the direction PT to FT. | | | | |
| NOTE 4: If the PT has stored a service class that is related to the current active IPUI, then the <<SERVICE-CLASS>> information element is mandatory in the direction PT to FT. | | | | |

6.3.6.9 {AUTHENTICATION-REQUEST}

This message is sent by the FT or PT to initiate authentication of the PT or FT identity.

Table 46: {AUTHENTICATION-REQUEST}

| Message Type | | Format | | Directions |
|---|--------|----------------|----------------|---------------|
| {AUTHENTICATION-REQUEST} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| AUTH-TYPE | 7.7.4 | M | M | 5 to 6 |
| RAND (see note 1) | 7.7.32 | M | M | 10 |
| RES (see notes 1 and 3) | 7.7.35 | N | M/O | 6 |
| RS (see notes 1 and 2) | 7.7.36 | M/O | N | 10 |
| Cipher info | 7.7.10 | O | O | 4 to 5 |
| Repeat indicator | 7.6.3 | O | O | 1 |
| IWU-TO-IWU | 7.7.23 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; N = Not allowed; O = Optional. | | | | |
| NOTE 1: The length when a DECT Standard Authentication Algorithm (DSAA) is used. | | | | |
| NOTE 2: If a DECT Standard Authentication Algorithm (DSAA) is used, then the <<RS>> information element is mandatory in the direction FT to PT. | | | | |
| NOTE 3: If this message is used in the key allocation procedure, then the <<RES>> information element is mandatory in the direction PT to FT. | | | | |

6.3.6.10 {CIPHER-REJECT}

This message is sent by the PT or FT to indicate that the requested cipher switching cannot be done.

Table 47: {CIPHER-REJECT}

| Message Type | | Format | | Directions |
|---|--------|----------------|----------------|---------------|
| {CIPHER-REJECT} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| Repeat Indicator (see note) | 7.6.3 | O | O | 1 |
| Cipher info (see note) | 7.7.10 | O | O | 4 to 5 |
| Reject Reason | 7.7.34 | O | O | 3 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; O = Optional. | | | | |
| NOTE: Instead of one <<CIPHER-INFO>> information element, also a prioritized list of <<CIPHER-INFO>> information elements can be included by using the <<REPEAT-INDICATOR>> information element. Not more than 3 <<CIPHER-INFO>> information elements should be included. | | | | |

6.3.6.11 {CIPHER-REQUEST}

This message is sent by the FT to engage or disengage ciphering of a connection.

Table 48: {CIPHER-REQUEST}

| Message Type | | Format | | Directions |
|--|--------|----------------|----------------|---------------|
| {CIPHER-REQUEST} | | S | | F=>P |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | - | 1/2 |
| Transaction Identifier | 7.3 | M | - | 1/2 |
| Message Type | 7.4 | M | - | 1 |
| Cipher info | 7.7.10 | M | - | 4 to 5 |
| Call Identity | 7.7.6 | O | - | 3 to 4 |
| Connection Identity | 7.7.12 | O | - | ≥ 3 |
| IWU-TO-IWU | 7.7.23 | O | - | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | - | ≥ 4 |
| M = Mandatory; O = Optional; - = Not applicable. | | | | |

6.3.6.12 {CIPHER-SUGGEST}

This message is sent by the PT to request engaging or disengaging ciphering of a connection.

Table 49: {CIPHER-SUGGEST}

| Message Type | | Format | | Directions |
|--|--------|----------------|----------------|---------------|
| {CIPHER-SUGGEST} | | S | | P=>F |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | - | M | 1/2 |
| Transaction Identifier | 7.3 | - | M | 1/2 |
| Message Type | 7.4 | - | M | 1 |
| Cipher info | 7.7.10 | - | M | 4 to 5 |
| Call Identity | 7.7.6 | - | O | 3 to 4 |
| Connection Identity | 7.7.12 | - | O | ≥ 3 |
| IWU-TO-IWU | 7.7.23 | - | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | - | O | ≥ 4 |
| M = Mandatory; O = Optional; - = Not applicable. | | | | |

6.3.6.13 {DETACH}

This message is sent by the PT to the FT to set a deactivation indication in the network.

Table 50: {DETACH}

| Message Type | | Format | | Directions |
|---------------------------|---|----------------|----------------|---------------|
| {DETACH} | | S | | P=>F |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | - | M | 1/2 |
| Transaction Identifier | 7.3 | - | M | 1/2 |
| Message Type | 7.4 | - | M | 1 |
| Portable identity | 7.7.30 | - | M | 7 to 20 |
| NWK assigned identity | 7.7.28 | - | O | 5 to 20 |
| Network parameter | 7.7.29 | - | O | ≥ 3 |
| Repeat indicator | 7.6.3 | - | O | 1 |
| Segmented info (see note) | 7.7.37 | O | O | 4 |
| IWU-TO-IWU | 7.7.23 | - | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | - | O | ≥ 4 |
| M | = Mandatory; | | | |
| O | = Optional; | | | |
| - | = Not applicable. | | | |
| NOTE: | The <<Segmented Info>> information element shall be included in front of the <<IWU-TO-IWU>> information element whenever the <<IWU-TO-IWU>> is segmented over a number of consecutive messages. | | | |

6.3.6.14 {IDENTITY-REPLY}

This message is sent by the PT to the FT in response to an {IDENTITY-REQUEST} message providing the requested identity.

Table 51: {IDENTITY-REPLY}

| Message Type | Format | Directions | | |
|--|--------|----------------|----------------|---------------|
| {IDENTITY-REPLY} | S | P=>F | | |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | - | M | 1/2 |
| Transaction Identifier | 7.3 | - | M | 1/2 |
| Message Type | 7.4 | - | M | 1 |
| Repeat Indicator (see note 1) | 7.6.3 | - | O | 1 |
| Portable identity (see note 1) | 7.7.30 | - | O | 7 to 20 |
| Repeat Indicator (see note 2) | 7.6.3 | - | O | 1 |
| Fixed identity (see note 2) | 7.7.18 | - | O | 5 to 20 |
| Repeat Indicator (see note 3) | 7.6.3 | - | O | 1 |
| NWK assigned identity (see note 3) | 7.7.28 | - | O | 5 to 20 |
| Model Identifier | 7.7.46 | - | O | 5 to 20 |
| Network parameter | 7.7.29 | - | O | ≥ 3 |
| Repeat indicator | 7.6.3 | - | O | 1 |
| IWU-TO-IWU | 7.7.23 | - | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | - | O | ≥ 4 |
| M = Mandatory; O = Optional. | | | | |
| NOTE 1: More than one <<PORTABLE-IDENTITY>> information element can be included by using the <<REPEAT-INDICATOR>> information element. In this case the coding for "non-prioritized list" is used. | | | | |
| NOTE 2: More than one <<FIXED-IDENTITY>> information element can be included by using the <<REPEAT-INDICATOR>> information element. In this case the coding for "non-prioritized list" is used. | | | | |
| NOTE 3: More than one <<NWK-ASSIGNED-IDENTITY>> information element can be included by using the <<REPEAT-INDICATOR>> information element. In this case the coding for "non-prioritized list" is used. | | | | |
| NOTE 4: An {IDENTITY-REPLY} message without any information elements has the same meaning as an "{IDENTITY-REJECT}" message. | | | | |

6.3.6.15 {IDENTITY-REQUEST}

This message is sent by the FT to the PT to request a PT to submit the specified identity to the FT.

Table 52: {IDENTITY-REQUEST}

| Message Type | Format | Directions | | |
|---|--------|----------------|----------------|---------------|
| {IDENTITY-REQUEST} | S | F=>P | | |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | - | 1/2 |
| Transaction Identifier | 7.3 | M | - | 1/2 |
| Message Type | 7.4 | M | - | 1 |
| Repeat Indicator (see note) | 7.6.3 | M/N | - | 1 |
| Identity type (see note) | 7.7.19 | M | - | 4 |
| Network parameter | 7.7.29 | O | - | ≥ 3 |
| IWU-TO-IWU | 7.7.23 | O | - | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | - | ≥ 4 |
| M = Mandatory; N = Not allowed; O = Optional. | | | | |
| NOTE: More than one <<IDENTITY-TYPE>> information element can be included by using the <<REPEAT-INDICATOR>> information element. In this case the coding for "non-prioritized list" is used. Not more than 3 <<IDENTITY-TYPE>> information elements should be included. | | | | |

6.3.6.16 {KEY-ALLOCATE}

This message is sent by the FT to the PT to replace an authentication code by an User Authentication Key (UAK).

Table 53: {KEY-ALLOCATE}

| Message Type | | Format | Directions | |
|---|--------|----------------|----------------|---------------|
| {KEY-ALLOCATE} | | S | F=>P | |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | - | 1/2 |
| Transaction Identifier | 7.3 | M | - | 1/2 |
| Message Type | 7.4 | M | - | 1 |
| Allocation type | 7.7.2 | M | - | 4 |
| RAND (see note) | 7.7.32 | M | - | 10 |
| RS (see note) | 7.7.36 | M | - | 10 |
| Escape to proprietary | 7.7.45 | O | - | ≥ 4 |
| M = Mandatory. | | | | |
| NOTE: The length when a DECT standard authentication algorithm is used. | | | | |

6.3.6.17 {LOCATE-ACCEPT}

This message is sent by the FT to the PT to indicate that location updating or attach has been completed.

Table 54: {LOCATE-ACCEPT}

| Message Type | | Format | Directions | |
|---|--------|----------------|----------------|---------------|
| {LOCATE-ACCEPT} | | S | F=>P | |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | - | 1/2 |
| Transaction Identifier | 7.3 | M | - | 1/2 |
| Message Type | 7.4 | M | - | 1 |
| Portable identity (see note 1) | 7.7.30 | M | - | 2 to 20 |
| Location area | 7.7.25 | M | - | ≥ 3 |
| Use TPUI | 7.6.2 | O | - | 1 |
| NWK assigned identity | 7.7.28 | O | - | 5 to 20 |
| Ext h/o indicator | 7.7.51 | O | - | 3 |
| Setup capability | 7.7.40 | O | - | 4 |
| Duration | 7.7.13 | O | - | 4 |
| Repeat indicator | 7.6.3 | O | - | 1 |
| Segmented info (see note 2) | 7.7.37 | O | O | 4 |
| IWU-TO-IWU | 7.7.23 | O | - | ≥ 4 |
| Model identifier | 7.7.46 | O | - | 5 to 20 |
| Escape to proprietary | 7.7.45 | O | - | ≥ 4 |
| M = Mandatory; | | | | |
| O = Optional. | | | | |
| NOTE 1: This element may contain zero length contents if a new TPUI is not assigned. | | | | |
| NOTE 2: The <<Segmented Info>> information element shall be included in front of the <<IWU-TO-IWU>> information element whenever the <<IWU-TO-IWU>> is segmented over a number of consecutive messages. | | | | |

6.3.6.18 {LOCATE-REJECT}

This message is sent by the FT to the PT to indicate that location updating or attach has failed.

Table 55: {LOCATE-REJECT}

| Message Type | | Format | | Directions |
|---|--------|----------------|----------------|---------------|
| {LOCATE-REJECT} | | S | | F=>P |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | - | 1/2 |
| Transaction Identifier | 7.3 | M | - | 1/2 |
| Message Type | 7.4 | M | - | 1 |
| Reject Reason | 7.7.34 | O | - | 3 |
| Duration | 7.7.13 | O | - | 4 |
| Repeat indicator | 7.6.3 | O | - | 1 |
| Segmented info (see note) | 7.7.37 | O | O | 4 |
| IWU-TO-IWU | 7.7.23 | O | - | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | - | ≥ 4 |
| M = Mandatory; O = Optional; - = Not applicable. | | | | |
| NOTE: The <<Segmented Info>> information element shall be included in front of the <<IWU-TO-IWU>> information element whenever the <<IWU-TO-IWU>> is segmented over a number of consecutive messages. | | | | |

6.3.6.19 {LOCATE-REQUEST}

This message is sent by the PT to the FT either to request update of its location file or to request attach.

Table 56: {LOCATE-REQUEST}

| Message Type | | Format | | Directions |
|---|--------|----------------|----------------|---------------|
| {LOCATE-REQUEST} | | S | | P=>F |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | - | M | 1/2 |
| Transaction Identifier | 7.3 | - | M | 1/2 |
| Message Type | 7.4 | - | M | 1 |
| Portable identity | 7.7.30 | - | M | 7 to 20 |
| Fixed identity | 7.7.18 | - | O | 5 to 20 |
| Location area | 7.7.25 | - | O | ≥ 3 |
| NWK assigned identity | 7.7.28 | - | O | 5 to 20 |
| Cipher info | 7.7.10 | - | O | 4 to 5 |
| Setup capability | 7.7.40 | - | O | 4 |
| Terminal capability | 7.7.41 | - | O | 6 to 19 |
| Network parameter | 7.7.29 | - | O | ≥ 3 |
| Repeat indicator | 7.6.3 | - | O | 1 |
| Segmented info (see note) | 7.7.37 | O | O | 4 |
| IWU-TO-IWU | 7.7.23 | - | O | ≥ 4 |
| Model identifier | 7.7.46 | - | O | 5 to 20 |
| Escape to proprietary | 7.7.45 | - | O | ≥ 4 |
| M = Mandatory; O = Optional; - = Not applicable. | | | | |
| NOTE: The <<Segmented Info>> information element shall be included in front of the <<IWU-TO-IWU>> information element whenever the <<IWU-TO-IWU>> is segmented over a number of consecutive messages. | | | | |

6.3.6.20 {MM-INFO-ACCEPT}

This message is sent by the FT to the PT in response to a {MM-INFO-REQUEST} message providing the requested information.

Table 57: {MM-INFO-ACCEPT}

| Message Type | | Format | | Directions |
|---|--------|----------------|----------------|---------------|
| {MM-INFO-ACCEPT} | | S | | F=>P |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | - | 1/2 |
| Transaction Identifier | 7.3 | M | - | 1/2 |
| Message Type | 7.4 | M | - | 1 |
| Info type | 7.7.20 | O | - | ≥ 3 |
| Call Identity | 7.7.6 | O | - | 3 to 4 |
| Repeat Indicator | 7.6.3 | O | - | 1 |
| Fixed identity | 7.7.18 | O | - | 5 to 20 |
| Location area | 7.7.25 | O | - | ≥ 3 |
| NWK assigned identity | 7.7.28 | O | - | 5 to 20 |
| Network parameter | 7.7.29 | O | - | ≥ 3 |
| Duration | 7.7.13 | O | - | 4 |
| Segmented info (see note) | 7.7.37 | O | O | 4 |
| IWU-TO-IWU | 7.7.23 | O | - | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | - | ≥ 4 |
| M = Mandatory; O = Optional; - = Not applicable. | | | | |
| NOTE: The <<Segmented Info>> information element shall be included in front of the <<IWU-TO-IWU>> information element whenever the <<IWU-TO-IWU>> is segmented over a number of consecutive messages. | | | | |

6.3.6.21 {MM-INFO-REJECT}

This message is sent by the FT to indicate to the PT that the requested information cannot be sent.

Table 58: {MM-INFO-REJECT}

| Message Type | | Format | | Directions |
|---|--------|----------------|----------------|---------------|
| {MM-INFO-REJECT} | | S | | F=>P |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | - | 1/2 |
| Transaction Identifier | 7.3 | M | - | 1/2 |
| Message Type | 7.4 | M | - | 1 |
| Call Identity | 7.7.6 | O | - | 3 to 4 |
| Reject Reason | 7.7.34 | O | - | 3 |
| Segmented info (see note) | 7.7.37 | O | O | 4 |
| IWU-TO-IWU | 7.7.23 | O | - | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | - | ≥ 4 |
| M = Mandatory; O = Optional; - = Not applicable. | | | | |
| NOTE: The <<Segmented Info>> information element shall be included in front of the <<IWU-TO-IWU>> information element whenever the <<IWU-TO-IWU>> is segmented over a number of consecutive messages. | | | | |

6.3.6.22 {MM-INFO-REQUEST}

This message is sent by the PT to the FT to request information (e.g. regarding external handover) to be sent in a subsequent {MM-INFO-ACCEPT} message.

Table 59: {MM-INFO-REQUEST}

| Message Type | | Format | | Directions |
|---|--------|----------------|----------------|---------------|
| {MM-INFO-REQUEST} | | S | | P=>F |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | - | M | 1/2 |
| Transaction Identifier | 7.3 | - | M | 1/2 |
| Message Type | 7.4 | - | M | 1 |
| Info type | 7.7.20 | - | M | ≥ 3 |
| Call Identity | 7.7.6 | - | O | 3 to 4 |
| Portable identity | 7.7.30 | - | O | 7 to 20 |
| Repeat indicator | 7.6.3 | - | O | 1 |
| Fixed identity | 7.7.18 | - | O | 5 to 20 |
| Location area | 7.7.25 | - | O | ≥ 3 |
| NWK assigned identity | 7.7.28 | - | O | 5 to 20 |
| Network parameter | 7.7.29 | - | O | ≥ 3 |
| Segmented info (see note) | 7.7.37 | O | O | 4 |
| IWU-TO-IWU | 7.7.23 | - | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | - | O | ≥ 4 |
| M = Mandatory; O = Optional; - = Not applicable. | | | | |
| NOTE: The <<Segmented Info>> information element shall be included in front of the <<IWU-TO-IWU>> information element whenever the <<IWU-TO-IWU>> is segmented over a number of consecutive messages. | | | | |

6.3.6.23 {MM-INFO-SUGGEST}

This message is sent by the FT to provide information to the PT or to suggest an action to the PT, e.g. to perform location updating or access rights modification or an external handover.

Table 60: {MM-INFO-SUGGEST}

| Message Type | | Format | Directions | |
|---|--------|----------------|----------------|---------------|
| {MM-INFO-SUGGEST} | | S | F=>P | |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | - | 1/2 |
| Transaction Identifier | 7.3 | M | - | 1/2 |
| Message Type | 7.4 | M | - | 1 |
| Info type | 7.7.20 | M | - | ≥ 3 |
| Call Identity | 7.7.6 | O | - | 3 to 4 |
| Fixed identity | 7.7.18 | O | - | 5 to 20 |
| Location area | 7.7.25 | O | - | ≥ 3 |
| NWK assigned identity | 7.7.28 | O | - | 5 to 20 |
| Network parameter | 7.7.29 | O | - | ≥ 3 |
| Ext h/o indicator | 7.7.51 | O | - | 3 |
| KEY | 7.7.24 | O | - | ≥ 4 |
| Setup capability | 7.7.40 | O | - | 4 |
| Segmented info (see note) | 7.7.37 | O | O | 4 |
| IWU-TO-IWU | 7.7.23 | O | - | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | - | ≥ 4 |
| M = Mandatory; O = Optional; - = Not applicable. | | | | |
| NOTE: The <<Segmented Info>> information element shall be included in front of the <<IWU-TO-IWU>> information element whenever the <<IWU-TO-IWU>> is segmented over a number of consecutive messages. | | | | |

6.3.6.24 {TEMPORARY-IDENTITY-ASSIGN}

This message is sent by the FT to the PT to allocate a TPUI or a network assigned identity.

Table 61: {TEMPORARY-IDENTITY-ASSIGN}

| Message Type | | Format | Directions | |
|---|--------|----------------|----------------|---------------|
| {TEMPORARY-IDENTITY-ASSIGN} | | S | F=>P | |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | - | 1/2 |
| Transaction Identifier | 7.3 | M | - | 1/2 |
| Message Type | 7.4 | M | - | 1 |
| Portable identity (see note) | 7.7.30 | O | - | 7 to 20 |
| Location area | 7.7.25 | O | - | ≥ 3 |
| NWK assigned identity (see note) | 7.7.28 | O | - | 5 to 20 |
| Duration | 7.7.13 | O | - | 4 |
| Network parameter | 7.7.29 | O | - | ≥ 3 |
| Repeat indicator | 7.6.3 | O | - | 1 |
| IWU-TO-IWU | 7.7.23 | O | - | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | - | ≥ 4 |
| M = Mandatory; O = Optional; - = Not applicable. | | | | |
| NOTE: At least one identity information element is included in a {TEMPORARY-IDENTITY-ASSIGN} message. | | | | |

6.3.6.25 {TEMPORARY-IDENTITY-ASSIGN-ACK}

This message is sent by the PT to the FT to indicate that allocation of a TPUI or network assigned identity has taken place.

Table 62: {TEMPORARY-IDENTITY-ASSIGN-ACK}

| Message Type | | Format | Directions | |
|---------------------------------|---|----------------|----------------|---------------|
| {TEMPORARY-IDENTITY-ASSIGN-ACK} | | S | P=>F | |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | - | M | 1/2 |
| Transaction Identifier | 7.3 | - | M | 1/2 |
| Message Type | 7.4 | - | M | 1 |
| Segmented info (see note) | 7.7.37 | O | O | 4 |
| IWU-TO-IWU | 7.7.23 | - | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | - | O | ≥ 4 |
| M | = Mandatory; | | | |
| O | = Optional; | | | |
| - | = Not applicable. | | | |
| NOTE: | The <<Segmented Info>> information element shall be included in front of the <<IWU-TO-IWU>> information element whenever the <<IWU-TO-IWU>> is segmented over a number of consecutive messages. | | | |

6.3.6.26 {TEMPORARY-IDENTITY-ASSIGN-REJ}

This message is sent by the PT to the FT to indicate that allocation of a TPUI or network assigned identity has failed.

Table 63: {TEMPORARY-IDENTITY-ASSIGN-REJ}

| Message Type | | Format | Directions | |
|---------------------------------|-------------------|----------------|----------------|---------------|
| {TEMPORARY-IDENTITY-ASSIGN-REJ} | | S | P=>F | |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | - | M | 1/2 |
| Transaction Identifier | 7.3 | - | M | 1/2 |
| Message Type | 7.4 | - | M | 1 |
| Reject Reason | 7.7.34 | - | O | 3 |
| Escape to proprietary | 7.7.45 | - | O | ≥ 4 |
| M | = Mandatory; | | | |
| O | = Optional; | | | |
| - | = Not applicable. | | | |

6.3.6.27 {MM-IWU}

This message is used to exchange external protocol information in a transparent manner.

Table 63a: {MM-IWU}

| Message Type | | Format | | Directions |
|---|--------|----------------|----------------|---------------|
| {MM-IWU} | | S | | Both |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | M | 1/2 |
| Transaction Identifier | 7.3 | M | M | 1/2 |
| Message Type | 7.4 | M | M | 1 |
| Repeat indicator (see note 1) | 7.6.3 | O | O | 1 |
| Segmented info (see note 2) | 7.7.37 | O | O | 4 |
| IWU-IWU | 7.7.23 | O | O | ≥ 4 |
| Segmented info (see note 2) | 7.7.37 | O | O | 4 |
| IWU-PACKET | 7.7.22 | O | O | ≥ 4 |
| Escape to proprietary | 7.7.45 | O | O | ≥ 4 |
| M = Mandatory; O = Optional. | | | | |
| NOTE 1: The <<Repeat indicator>> information element may optionally be included in front of the <<IWU-TO-IWU>> information indicating "non prioritized" list. | | | | |
| NOTE 2: The <<Segmented Info>> information element shall be included in front of the <<IWU-TO-IWU>> information element whenever the <<IWU-TO-IWU>> is segmented over a number of consecutive messages. | | | | |

6.3.6.28 {MM-NOTIFY}

This message is used to exchange internal protocol information.

Table 63b: {MM-NOTIFY}

| Message Type | | Format | | Directions |
|--|--------|----------------|----------------|---------------|
| {MM-NOTIFY} | | S | | F=>P |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | - | 1/2 |
| Transaction Identifier | 7.3 | M | - | 1/2 |
| Message Type | 7.4 | M | - | 1 |
| Timer Restart | 7.6.9 | O | - | 2 |
| Escape to proprietary | 7.7.45 | O | - | ≥ 4 |
| M = Mandatory; O = Optional; - = Not applicable. | | | | |

6.3.7 LCE-messages

6.3.7.1 {LCE-PAGE-RESPONSE}

This message is sent by the PT to the FT to indicate that it has received a {LCE-REQUEST-PAGE} message.

Table 64: {LCE-PAGE-RESPONSE}

| Message Type | | Format | Directions | |
|--|--------|----------------|----------------|---------------|
| {LCE-PAGE-RESPONSE} | | S | P=>F | |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | - | M | 1/2 |
| Transaction Identifier | 7.3 | - | M | 1/2 |
| Message Type | 7.4 | - | M | 1 |
| Portable identity | 7.7.30 | - | M | 7 to 20 |
| Fixed identity | 7.7.18 | - | O | 5 to 20 |
| NWK assigned identity | 7.7.28 | - | O | 5 to 20 |
| Cipher info | 7.7.10 | - | O | 4 to 5 |
| Escape to proprietary | 7.7.45 | - | O | ≥ 4 |
| M = Mandatory; O = Optional; - = Not applicable. | | | | |

6.3.7.2 {LCE-PAGE-REJECT}

This message is sent by the FT to the PT to reject an unwanted response to a {LCE-REQUEST-PAGE} message.

Table 65: {LCE-PAGE-REJECT}

| Message Type | | Format | Directions | |
|--|--------|----------------|----------------|---------------|
| {LCE-PAGE-REJECT} | | S | F=>P | |
| Information Element | Clause | F to P message | P to F message | Length octets |
| Protocol Discriminator | 7.2 | M | - | 1/2 |
| Transaction Identifier | 7.3 | M | - | 1/2 |
| Message Type | 7.4 | M | - | 1 |
| Portable identity (see note) | 7.7.30 | M | - | 7 to 20 |
| Fixed identity | 7.7.18 | O | - | 5 to 20 |
| Reject Reason | 7.7.34 | O | - | 3 |
| Escape to proprietary | 7.7.45 | O | - | ≥ 4 |
| M = Mandatory; O = Optional; - = Not applicable. | | | | |
| NOTE: The <<PORTABLE-IDENTITY>> information element contains the full IPUI of the PT that is rejected. | | | | |

6.4 B-FORMAT message functional contents

6.4.1 B-FORMAT message overview

Each of the B-FORMAT message definitions includes:

- a) a brief description of the message direction and use;
- b) a table listing all the possible information elements that can be contained in the message. For each element, the table defines:
 - 1) the name of the information element;
 - 2) a reference to the clause where the information element is defined;
 - 3) whether the inclusion of the information element is Mandatory (M) or Optional (O) or Not allowed (N). These inclusion rules are defined separately for each message direction. If the message is only specified for one direction, the elements are marked not applicable (-) for the other direction;
 - 4) the range of possible lengths of the information element.
- c) further explanatory notes as required.

The information elements are always listed in their order of appearance, this order is mandatory for all instances of the message. Receiver implementations shall take account of the possibility that further information elements may be inserted in the message tables in future editions of the present document.

6.4.2 {LCE-REQUEST-PAGE}

This message is used by the LCE in the FT to request a PT to immediately establish a link to that FT.

Table 66: {LCE-REQUEST-PAGE}

| Message Type | | Format | | Directions |
|---|--------|----------------|----------------|---------------|
| {LCE-REQUEST-PAGE} | | B | | F=>P |
| Information Element | Clause | F to P message | P to F message | Length octets |
| LCE Header | 8.2 | M | - | 1/2 |
| Long address (see note) | 8.2 | O | - | 4 |
| Short address (see note) | 8.2 | O | - | 2 |
| M = Mandatory; O = Optional; - = Not applicable. | | | | |
| NOTE: The message shall contain either a <<LONG-ADDRESS>> element or a <<SHORT-ADDRESS>> element. | | | | |

6.4.3 {CLMS-FIXED}

This message is used by the CLMS in the FT to send application specific information to one or more PTs.

Table 67: {CLMS-FIXED}

| Message Type | | Format | Directions | |
|--|--------|----------------|----------------|---------------|
| {CLMS-FIXED} | | B | F=>P | |
| Information Element | Clause | F to P message | P to F message | Length octets |
| CLMS Header (see note 1) | 8.3.2 | M | - | 1/2 |
| Short address (see note 2) | 8.3.2 | M | - | 2 |
| Protocol Discriminator (see note 2) | 8.3.2 | M | - | 1 |
| Length Indicator (see note 3) | 8.3.2 | M/N | - | 1 |
| Data | 8.3.2 | M | - | 1 to 20 |
| Fill4 | 8.3.2 | O | - | 0 to 3 |
| M = Mandatory; N = Not allowed; O = Optional; - = Not applicable. | | | | |
| NOTE 1: This message will be fragmented into message sections suitable for transmission by the MAC broadcast message control services. NOTE 2: This element appears in all message sections. NOTE 3: These elements are mandatory for all {CLMS-FIXED} messages. They are contained in the first message section. Refer to clause 12.3.1. NOTE 4: The <<LENGTH-INDICATOR>> is mandatory for multi-section messages. It is not allowed for single-section messages. Refer to clause 12.3.1. NOTE 5: The fill field is used to adjust the total message length to an integral number of sections. Refer to clause 8.3. | | | | |

7 S-FORMAT message structures

7.1 Overview

The S-FORMAT message structures are based on the principles adopted in EN 300 403-1 [8]. Similar modifications to those adopted in I-ETS 300 022 have also been used. The detailed coding of all elements is unique to the present document.

Every message consists of the following parts:

- a) protocol discriminator;
- b) transaction identifier;
- c) message type;
- d) information elements.

Elements a), b) and c) shall be present in every message. Element d) is specific to each message type.

Elements a) and b) are combined into one octet (octet 1) of every message.

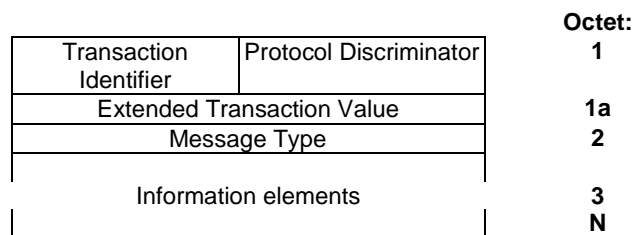


Figure 3: S-FORMAT message structures

NOTE: Octet 1a is optional, and should only be used on systems that require an extended transaction value.

7.2 Protocol Discrimination (PD) element




Figure 4: Protocol Discriminator (PD) bits

Protocol Discriminator (PD):

| Bits: | 4 | 3 | 2 | 1 | Meaning |
|----------------------------|---|---|---|---|---|
| 0 0 0 0 | | | | | Link Control Entity (LCE) messages |
| 0 0 1 1 | | | | | Call Control (CC) messages (see note 2) |
| 0 1 0 0 | | | | | Call Independent Supplementary Services (CISS) messages |
| 0 1 0 1 | | | | | Mobility Management (MM) messages |
| 0 1 1 0 | | | | | ConnectionLess Message Service (CLMS) messages |
| 0 1 1 1 | | | | | Connection Oriented Message Service (COMS) messages |
| 1 - - - | | | | | Unknown protocol entity |
| All other values reserved. | | | | | |

NOTE 1: Only bit 4 of this protocol discriminator is used in the ECMA/ETSI sense. Bits 3 to 1 are used to provide discrimination between different entities within one protocol set.

NOTE 2: CC messages include Call Related Supplementary Service (CRSS) messages.

7.3 Transaction Identifier (TI) element

The Transaction Identifier (TI) is used to distinguish multiple parallel transactions (multiple activities) associated with one PT (one value of IPU). The Transaction Identifier (TI) only applies to the associated value of Protocol Discriminator (PD), and the same value of transaction identity may be used by different protocol entities at the same time. A Transaction Identifier (TI) contains two fields, a Flag field (F) and a Transaction Value (TV) field.

The allowable values of the Transaction Value (TV) depend on the associated Protocol Discriminator (PD) according to table 68.

Table 68: Allowable range of Transaction Identifiers (TIs)

| Protocol Discriminator | Maximum number of parallel transactions | Allowable values of transaction value |
|------------------------|---|---------------------------------------|
| LCE | 1 | "0" only |
| CC | 7 + extend | "0" to "6" + extend |
| CISS | 7 | "0" to "6" |
| MM | 1 | "0" only |
| CLMS | 1 | "0" only |
| COMS | 7 | "0" to "6" |
| Unknown | Not defined | Not defined |

The TI is assigned by the side that initiates the transaction (portable side or fixed side). The protocol entities on both sides have access to the full allowable range of transaction values as given above. The same TV can be used for two simultaneous transactions that are originated from opposite sides.

The TI value of "6" shall only be used for connectionless NWK layer transactions. For the procedures see clause 10.4.2.3.




Figure 5: Transaction Identifier (TI) bits

Transaction Flag (F):

F = 0 for message from transaction originator

F = 1 for message from transaction destination

Transaction Value (TV):

Bits: 7 6 5 Meaning

0 0 0 } Valid TV

to

1 1 0 }

1 1 1 Reserved value (TV extension)

When the reserved value is used, the message shall contain an additional octet (octet 1b) containing an 8-bit Extended Transaction Value (TVX).

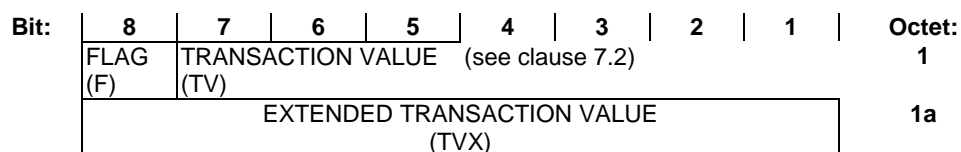


Figure 6: Extended Transaction Identifier (ETI) bits

7.4 Message type element



Figure 7: Message Identifier (MI)

The purpose of the message type is to identify the function of the message being sent. The message type is coded as shown in the following tables.

7.4.1 Messages for CC

Table 69: CC message type coding

| CC message types | Bits | | | | | | | |
|---------------------|------|---|---|---|---|---|---|---|
| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
| Reserved | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| {CC-ALERTING} | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| {CC-CALL-PROC} | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| {CC-SETUP} | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 1 |
| {CC-CONNECT} | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 |
| {CC-SETUP-ACK} | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 1 |
| {CC-CONNECT-ACK} | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 |
| {CC-SERVICE-CHANGE} | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 |
| {CC-SERVICE-ACCEPT} | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 1 |
| {CC-SERVICE-REJECT} | 0 | 0 | 1 | 0 | 0 | 0 | 1 | 1 |
| {CC-RELEASE} | 0 | 1 | 0 | 0 | 1 | 1 | 0 | 1 |
| {CC-RELEASE-COM} | 0 | 1 | 0 | 1 | 1 | 0 | 1 | 0 |
| {IWU-INFO} | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 0 |
| {CC-NOTIFY} | 0 | 1 | 1 | 0 | 1 | 1 | 1 | 0 |
| {CC-INFO} | 0 | 1 | 1 | 1 | 1 | 0 | 1 | 1 |

7.4.2 Messages for SS

Table 70: SS message type coding

| CISS message types (call independ.) | Bits | | | | | | | |
|-------------------------------------|------|---|---|---|---|---|---|---|
| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
| {CISS-RELEASE-COM} | 0 | 1 | 0 | 1 | 1 | 0 | 1 | 0 |
| {FACILITY} | 0 | 1 | 1 | 0 | 0 | 0 | 1 | 0 |
| {CISS-REGISTER} | 0 | 1 | 1 | 0 | 0 | 1 | 0 | 0 |
| CRSS message types (call related) | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
| {HOLD} | 0 | 0 | 1 | 0 | 0 | 1 | 0 | 0 |
| {HOLD-ACK} | 0 | 0 | 1 | 0 | 1 | 0 | 0 | 0 |
| {HOLD-REJECT} | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 |
| {RETRIEVE} | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 1 |
| {RETRIEVE-ACK} | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 1 |
| {RETRIEVE-REJECT} | 0 | 0 | 1 | 1 | 0 | 1 | 1 | 1 |
| {FACILITY} | 0 | 1 | 1 | 0 | 0 | 0 | 1 | 0 |

7.4.3 Messages for COMS

Table 71: COMS message type coding

| COMS message types | Bits | | | | | | | |
|--------------------|------|---|---|---|---|---|---|---|
| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
| {COMS-SETUP} | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 1 |
| {COMS-CONNECT} | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 |
| {COMS-NOTIFY} | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 |
| {COMS-RELEASE} | 0 | 1 | 0 | 0 | 1 | 1 | 0 | 1 |
| {COMS-RELEASE-COM} | 0 | 1 | 0 | 1 | 1 | 0 | 1 | 0 |
| {COMS-INFO} | 0 | 1 | 1 | 1 | 1 | 0 | 1 | 1 |
| {COMS-ACK} | 0 | 1 | 1 | 1 | 1 | 0 | 0 | 0 |

7.4.4 Messages for CLMS

Table 72: CLMS message type coding

| CLMS message types | Bits | | | | | | | |
|--------------------|----------------------|---|---|---|---|---|---|---|
| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
| {CLMS-FIXED} | ** B-FORMAT message] | | | | | | | |
| {CLMS-VARIABLE} | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |

7.4.5 Messages for MM

Table 73: MM message type coding

| MM message types | Bits | | | | | | | |
|-----------------------------------|------|---|---|---|---|---|---|---|
| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
| {AUTHENTICATION-REQUEST} | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| {AUTHENTICATION-REPLY} | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 1 |
| {KEY-ALLOCATE} | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 0 |
| {AUTHENTICATION-REJECT} | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 1 |
| {ACCESS-RIGHTS-REQUEST} | 0 | 1 | 0 | 0 | 0 | 1 | 0 | 0 |
| {ACCESS-RIGHTS-ACCEPT} | 0 | 1 | 0 | 0 | 0 | 1 | 0 | 1 |
| {ACCESS-RIGHTS-REJECT} | 0 | 1 | 0 | 0 | 0 | 1 | 1 | 1 |
| {ACCESS-RIGHTS-TERMINATE-REQUEST} | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 0 |
| {ACCESS-RIGHTS-TERMINATE-ACCEPT} | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 1 |
| {ACCESS-RIGHTS-TERMINATE-REJECT} | 0 | 1 | 0 | 0 | 1 | 0 | 1 | 1 |
| {CIPHER-REQUEST} | 0 | 1 | 0 | 0 | 1 | 1 | 0 | 0 |
| {CIPHER-SUGGEST} | 0 | 1 | 0 | 0 | 1 | 1 | 1 | 0 |
| {CIPHER-REJECT} | 0 | 1 | 0 | 0 | 1 | 1 | 1 | 1 |
| {MM-INFO-REQUEST} | 0 | 1 | 0 | 1 | 0 | 0 | 0 | 0 |
| {MM-INFO-ACCEPT} | 0 | 1 | 0 | 1 | 0 | 0 | 0 | 1 |
| {MM-INFO-SUGGEST} | 0 | 1 | 0 | 1 | 0 | 0 | 1 | 0 |
| {MM-INFO-REJECT} | 0 | 1 | 0 | 1 | 0 | 0 | 1 | 1 |
| {LOCATE-REQUEST} | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 0 |
| {LOCATE-ACCEPT} | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 |
| {DETACH} | 0 | 1 | 0 | 1 | 0 | 1 | 1 | 0 |
| {LOCATE-REJECT} | 0 | 1 | 0 | 1 | 0 | 1 | 1 | 1 |
| {IDENTITY-REQUEST} | 0 | 1 | 0 | 1 | 1 | 0 | 0 | 0 |
| {IDENTITY-REPLY} | 0 | 1 | 0 | 1 | 1 | 0 | 0 | 1 |
| {MM-IWU} | 0 | 1 | 0 | 1 | 1 | 0 | 1 | 1 |
| {TEMPORARY-IDENTITY-ASSIGN} | 0 | 1 | 0 | 1 | 1 | 1 | 0 | 0 |
| {TEMPORARY-IDENTITY-ASSIGN-ACK} | 0 | 1 | 0 | 1 | 1 | 1 | 0 | 1 |
| {TEMPORARY-IDENTITY-ASSIGN-REJ} | 0 | 1 | 0 | 1 | 1 | 1 | 1 | 1 |
| {MM-NOTIFY} | 0 | 1 | 1 | 0 | 1 | 1 | 1 | 0 |

7.4.6 Messages for LCE

Table 74: LCE message type coding

| LCE message types | Bits | | | | | | | |
|---------------------|----------------------|---|---|---|---|---|---|---|
| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
| {LCE-PAGE-RESPONSE} | 0 | 1 | 1 | 1 | 0 | 0 | 0 | 1 |
| {LCE-PAGE-REJECT} | 0 | 1 | 1 | 1 | 0 | 0 | 1 | 0 |
| {LCE-REQUEST-PAGE} | ** B-FORMAT message] | | | | | | | |

7.5 Other information elements

7.5.1 Coding rules

Two categories of information element are defined, fixed length and variable length. These categories are distinguished by the coding of bit 8 of the identifier octet.

NOTE: Although similar coding to EN 300 403-1 [[8] has been used this should not be assumed. Most information elements have been redefined and reordered and EN 300 403-1 [8] should not be used as a detailed reference.

Fixed length information elements (bit 8 = "1")

The primary set of the fixed length information elements are single octet elements, where bits {4..1} contain the information. This corresponds to EN 300 403-1 [8].

One single octet identifier is used to define a secondary set of 2 octet elements. For this secondary set only, bits {4..1} of the first octet define a secondary identifier (an extended identifier) that describes one of each double octet elements, see clause 7.6.1. Octet 2 then contains a full octet of information.




Figure 8: Single octet information element




Figure 9: Double octet information element

Variable length information elements (bit 8 = "0")

Variable length elements follow the principles defined in EN 300 403-1 [8].

The descriptions of the variable length information elements are in clause 7.7.2 onwards. There is a particular order of appearance for each variable length information element within a message. The code values of the variable length information element identifiers are assigned in ascending numerical order, according to the defined order of appearance of the elements in each message. This allows receiving equipment to detect the presence or absence of a particular information element without scanning through an entire message.

The second octet of all variable length elements indicates the total length of the contents of that element regardless of the coding of the first octet (i.e. the length is calculated starting from octet 3). This length is the natural binary coding of the number of octets of the contents, with the least significant bit in bit position 1.

An optional variable length information element may be present but empty (i.e. length of contents = "0"). This should be interpreted by the receiver as equivalent to that information element being absent.

Some information elements contain spare bits, these are generally indicated as being set to "0". In order to allow compatibility with future implementations, elements should not be rejected if these spare bits are set to "1".

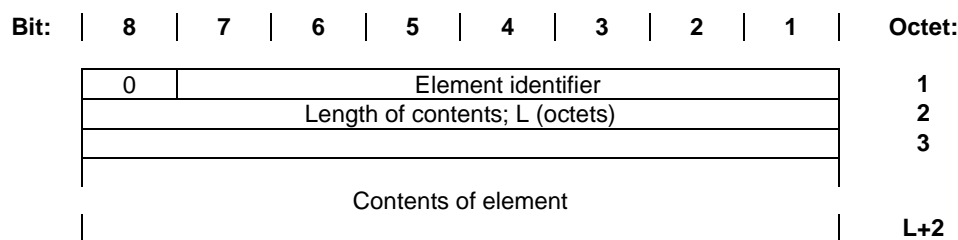


Figure 10: Variable length information element

The following rules apply to the coding of the contents of variable length information elements:

- 1) the first character (the digit) in the octet number identifies one octet or a group of octets;
- 2) each octet group is a self contained entity. The second character (the letter) in the octet number identifies the position of the octet in the group. The internal structure of an octet group may be defined in alternative ways;
- 3) an octet group is formed by using some extension mechanism. The preferred extension mechanism is to use bit 8 of each octet in the group as an extension bit. The bit value "0" indicates that the group is extended into the next octet. The bit value "1" indicates that this is the last octet of the group.

In the coding descriptions that follow, the following conventions are used:

- one octet group is described as a sequence of zero or more octets with "0/1" on bit position 8, followed by one octet with "0/1 ext" or "1" on bit position 8;
 - if any non-last octet of a described octet group has value 1, all subsequent octets shown for that octet are absent;
 - an octet group showing "0/1 ext" in bit position 8 of the last octet of that group may be extended with additional octets in later versions of the present document and equipment shall be prepared to receive such additional octets although the equipment need not to be able to act upon the contents of these octets;
 - an octet group showing "1" in bit position 8 of the last octet of that group will not be extended with additional octets in later versions of the present document;
 - an information element may be extended with additional octet groups in later versions of the present document, and equipment shall be prepared to receive additional octet groups although the equipment need not be able to act upon the contents of these octet groups.
- 4) in addition to the extension mechanism described above, an octet group may be defined by an explicit length coding either using the value in octet 2 or including a second length coding. This mechanism may be used instead of, or as well as, the preferred mechanism described above;
 - 5) in a few cases, this second length coding may define the length in bits (not octets). In this event the length of the octet group shall be minimum number of integral octets required to contain all the bits (i.e. the rounded-up value). The surplus bits shall be set to "0" by the sender and should be ignored by the receiver;
 - 6) unless otherwise stated, all fields within an information element shall be coded with the natural binary value, with the least significant bit in the lowest numbered bit position. If a field spans more than 1 octet, the information shall be arranged with the most significant bits in the lower numbered octets.

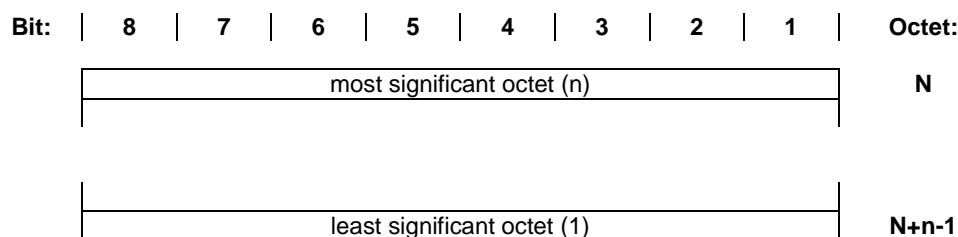


Figure 11: Structure of long fields

7.5.2 Extensions of codesets

The present document defines codeset "0". All elements listed in clauses 7.6.1 and 7.7.1 belong to codeset "0".

One value of single octet information element is reserved for shift operations as described in clauses 7.5.3 and 7.5.4. These shift operations allow an expansion of the information element coding structure to support 8 codesets.

Each codeset shall reserve the same value of single octet element for shifting from one codeset to another. The contents of this shift element identifies the codeset to be used for the next information element(s). The codeset in use at any time is referred to as the "active codeset". Codeset "0" (the codeset defined in the present document) shall be the initially active codeset at the start of every message.

The following coding rules shall apply to all codesets:

- the same basic fixed/variable length information element coding split (using octet 1, bit 8) shall be used;
- the same Identifier-Length-Contents format for variable length information elements shall be used;
- the same single/double octet coding (using octet 1, bits 5-7) for fixed length information elements shall be used;
- the same Shift fixed length information elements (according to requirements currently in clauses 7.5.2 to 7.5.4) shall be used. Other fixed length information elements may be different.

All equipment shall have the capability to recognize the shift element and to determine the length of the following information element(s). This shall enable the equipment to determine the start of a subsequent element. Equipment is not required to interpret any codesets except for codeset "0", elements from alternative codesets may be discarded without further action.

NOTE: Whenever an implementation receives an information element with an additional unexpected/undefined octet, it should not regard the information element to have invalid content/incorrect length. In order to accommodate future extension of the standards, the implementation should process the expected/defined/known octets and only discard the additional unexpected octets.

Two shift procedures shall be supported, locking shift and non-locking shift. Both procedures shall only apply to the message in which they appear (i.e. a shift shall not apply across message boundaries).

7.5.3 Locking shift procedure

The locking shift procedures uses the shift element to indicate the new active codeset. A "0" in bit position 4 indicates locking shift. The specified codeset remains active until another shift element appears or until the end of the message.

The locking shift procedure shall use the following element and coding:




Figure 12: Shift element (locking shift)

New (temporary) codeset identifier

| Bits | 3 2 1 | Meaning |
|-------------|--------------|--|
| | 0 0 0 | Initial codeset (the present document) |
| | 0 0 1 } | |
| | 0 1 0 } | Reserved |
| | 0 1 1 } | |
| | 1 - - | Escape for non-standard codeset |

This procedure shall only be used to shift to a higher number codeset than the codeset being left.

7.5.4 Non-locking shift procedure

The non-locking shift procedure uses the shift element to indicate a temporary active codeset. A "1" in bit position 4 indicates non-locking shift. The specified codeset shall only apply to the next information element (or until the end of the message). After that information element the codeset shall revert to the previous (locked) active codeset.

A non-locking shift element shall not be transmitted directly before a locking shift element. If this combination is received it shall be treated as though the locking shift element only had been received.

The non-locking shift procedure shall use the following element and coding:




Figure 13: Shift element (non-locking)

New (temporary) codeset identifier:

As for locking shift: refer to clause 7.5.3.

This procedure may be used to shift to a higher or lower numbered codeset than the codeset being left. A non-locking shift indicating the (currently) active codeset shall not of itself constitute an error.

7.5.5 Display and keypad elements

Display and keypad information can be carried in either a fixed length information element or a variable length information element:

| Fixed Length | Variable Length |
|--------------------|-------------------|
| <<SINGLE-DISPLAY>> | <<MULTI-DISPLAY>> |
| <<SINGLE-KEYPAD>> | <<MULTI-KEYPAD>> |

Whenever a message allows a <<"DISPLAY">> element or a <<"KEYPAD">> element to be included, this shall be understood to mean either one fixed length element <<SINGLE ---->> or one variable length element <<MULTI ---- >> but not both.

All <<"KEYPAD">> and <<"DISPLAY">> elements shall contain zero or more characters from the DECT standard 8 bit character set as described in annex D.

NOTE: The DECT standard character set is based on the IA5 character set.

7.5.6 Repeated elements

Most messages shall only contain one appearance of a given information element. Two exceptions to this rule are allowed, and these exceptions are marked by the inclusion of the <<REPEAT-INDICATOR>> information element. Error handling on reception of unexpectedly repeated information elements is covered in clause 17.5.2.

<<REPEAT-INDICATOR>>; coding 1.

The "non-prioritized list" coding is used when a message contains a list of repeated elements (containing different codings) which all are relevant. All elements in the list shall appear in immediate succession (i.e. there shall be no other elements in between the members of the list, and the <<REPEAT INDICATOR>> element shall immediately precede the first element of the list. These repeated lists are used for transferring a list of data, e.g. several Portable Access Rights Keys (PARKS) within one message.

<<REPEAT-INDICATOR>>; coding 2.

The "prioritized list" coding is used when a message contains a list of repeated elements (containing different codings) and inviting selection of one possibility. All elements in the list shall appear in immediate succession (i.e. there shall be no other elements in between the members of the list), and the <<REPEAT-INDICATOR>> element shall immediately precede the first element of the list. These repeated lists are used for negotiation of service, either at call establishment or during a service change.

7.6 Fixed length information elements

7.6.1 Summary

Table 75: Fixed length information elements coding

| | Bits | | | | | | | Reference | |
|------------------------------|----------|----------|----------|----------|----------|----------|----------|-----------|-------------|
| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | | 1 |
| Single Octet Elements | | | | | | | | | |
| Single Octet element | 1 | : | : | : | - | - | - | - | |
| Reserved | 1 | 0 | 0 | 0 | - | - | - | - | |
| Shift | 1 | 0 | 0 | 1 | - | - | - | - | 7.5.3/7.5.4 |
| Sending complete | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 7.6.2 |
| Delimiter request | 1 | 0 | 1 | 0 | 0 | 0 | 1 | 0 | 7.6.2 |
| Use TPUI | 1 | 0 | 1 | 0 | 0 | 0 | 1 | 1 | 7.6.2 |
| Repeat indicator | 1 | 1 | 0 | 1 | - | - | - | - | 7.6.3 |
| Double Octet element | 1 | 1 | 1 | 0 | - | - | - | - | |
| Double Octet Elements | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
| Basic Service | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 7.6.4 |
| Release Reason | 1 | 1 | 1 | 0 | 0 | 0 | 1 | 0 | 7.6.7 |
| Signal | 1 | 1 | 1 | 0 | 0 | 1 | 0 | 0 | 7.6.8 |
| Timer Restart | 1 | 1 | 1 | 0 | 0 | 1 | 0 | 1 | 7.6.9 |
| Test Hook Control | 1 | 1 | 1 | 0 | 0 | 1 | 1 | 0 | 7.6.10 |
| Single-Display | 1 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 7.6.5 |
| Single-Keypad | 1 | 1 | 1 | 0 | 1 | 0 | 0 | 1 | 7.6.6 |
| Reserved (escape) | 1 | 1 | 1 | 0 | 1 | 1 | 1 | 1 | |

7.6.2 Sending complete, delimiter request and use TPUI

The purpose of the <<SENDING-COMPLETE>> element is to optionally indicate completion of the called party number (see clause 9.3.1.5).

The purpose of the <<DELIMITER-REQUEST>> element is to optionally request the peer to return a <<SENDING-COMPLETE>> element when the called party number is completed.

The purpose of the <<USE-TPUI>> element is to optionally indicate that a PT may use TPUI in the <<portable identity>> in {CC-SETUP} and in {LCE-PAGE-RESPONSE}.




Figure 14: SENDING-COMPLETE information element




Figure 15: DELIMITER-REQUEST information element




Figure 16: USE-TPUI information element

7.6.3 Repeat indicator

The purpose of the <<REPEAT-INDICATOR>> element is to indicate how repeated information elements shall be interpreted when included in a message. The <<REPEAT-INDICATOR>> element shall be included immediately before the first occurrence of the information element which will be repeated. See clause 7.5.6.

NOTE: The use of the <<REPEAT-INDICATOR>> element in conjunction with an element that only appears once should not of itself constitute an error.




Figure 17: REPEAT-INDICATOR information element

Repeat indicator coding (octet 1):

| Bits | 4 3 2 1 | Meaning |
|------|----------------------------|---|
| | 0 0 0 1 | Non prioritized list. See clause 7.5.6. |
| | 0 0 1 0 | Prioritized list. See clause 7.5.6. |
| | All other values reserved. | |

7.6.4 Basic service

The purpose of the <<BASIC-SERVICE>> element is to indicate the basic aspects of the service requested. This element allows the user to indicate the use of default attributes, thereby reducing the length of the setup message.

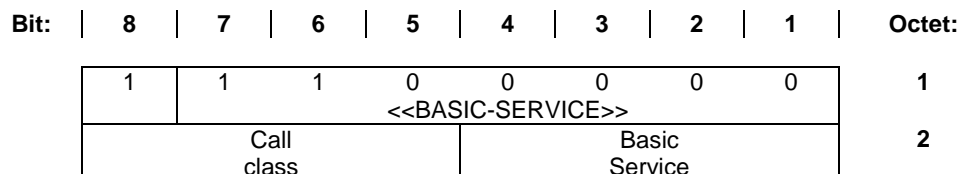


Figure 18: BASIC-SERVICE information element

Call class (octet 2):

| Bits | 8 7 6 5 | Meaning |
|------|----------------------------|--|
| | 0 1 0 0 | Message call setup |
| | 0 1 1 1 | DECT/ISDN IIP |
| | 1 0 0 0 | Normal call setup |
| | 1 0 0 1 | Internal call setup (typically used in residential environments) |
| | 1 0 1 0 | Emergency call setup |
| | 1 0 1 1 | Service call setup |
| | 1 1 0 0 | External handover call setup (see clause 9.3.1.1) |
| | 1 1 0 1 | Supplementary service call setup |
| | 1 1 1 0 | OA&M call setup |
| | All other values reserved. | |

Basic service (octet 2):

| Bits | 4 | 3 | 2 | 1 | Meaning |
|------|---|---|---|---|---|
| 0 | 0 | 0 | 0 | 0 | Basic speech default setup attributes (see note and clause 9.3.1.1) |
| 0 | 1 | 0 | 0 | 0 | DECT GSM IWP profile (Phase 2) |
| 0 | 1 | 1 | 0 | 0 | DECT UMTS IWP (TS 101 863 [64]) |
| 0 | 1 | 0 | 1 | 0 | LRMS (E-profile) service (EN 300 757 [50]) |
| 0 | 1 | 1 | 0 | 0 | GSM IWP SMS |
| 1 | 1 | 1 | 1 | 1 | Other (see clause 9.3.1.1) |

All other values reserved.

NOTE: The value of this field may be used in future standards to indicate "specific profile default setup attributes".

7.6.5 Single display

The purpose of the <<SINGLE-DISPLAY>> element is to convey display information that may be displayed by the PT. The <<SINGLE-DISPLAY>> element shall only contain DECT standard characters.




Figure 19: SINGLE-DISPLAY information element

NOTE: DECT characters are specified in annex D. These are based on IA5 characters.

7.6.6 Single keypad

The purpose of the <<SINGLE-KEYPAD>> element is to convey DECT standard characters e.g. as entered by means of a PT keypad.




Figure 20: SINGLE-KEYPAD information element

NOTE: DECT characters are specified in annex D. These are based on IA5 characters.

7.6.7 Release reason

The purpose of the <<RELEASE-REASON>> element is to convey the cause of the release. This element shall be used whenever a specific coding is indicated in the procedures. The element should also be used in all other cases.




Figure 21: RELEASE-REASON information element

Release reason coding: general values

| Value (hex) | Meaning (Reason) |
|-------------|---------------------------------------|
| 00 | Normal |
| 01 | Unexpected Message |
| 02 | Unknown Transaction Identifier |
| 03 | Mandatory information element missing |
| 04 | Invalid information element contents |
| 05 | Incompatible service |
| 06 | Service not implemented |
| 07 | Negotiation not supported |
| 08 | Invalid identity |
| 09 | Authentication failed |
| 0A | Unknown identity |
| 0B | Negotiation failed |
| 0C | Reserved |
| 0D | Timer expiry |
| 0E | Partial release |
| 0F | Unknown |

Release reason coding: user values

| Value (hex) | Meaning (Reason) |
|-------------|---------------------|
| 10 | User detached |
| 11 | User not in range |
| 12 | User unknown |
| 13 | User already active |
| 14 | User busy |
| 15 | User rejection |
| 16 | User call modify |
| 17 to 1F | Reserved |


Release reason coding: external handover values

| Value (hex) | Meaning (Reason) |
|-------------|---------------------------------|
| 20 | Reserved |
| 21 | External Handover not supported |
| 22 | Network Parameters missing |
| 23 | External Handover release |
| 24 to 2F | Reserved |

Release reason coding: temporary overload values

| Value (hex) | Meaning (Reason) |
|-------------|--------------------------------|
| 30 | Reserved |
| 31 | Overload |
| 32 | Insufficient resources |
| 33 | Insufficient bearers available |
| 34 | IWU congestion |
| 35 to 3F | Reserved |

All other values reserved.

7.6.8 Signal**Figure 22: SIGNAL information element**

Signal value coding (octet 2):

| Bits | 8 7 6 5 4 3 2 1 | Meaning |
|------|----------------------------|---|
| | 0 0 0 0 0 0 0 0 | Dial tone on (see note 3) |
| | 0 0 0 0 0 0 0 1 | Ring-back tone on (see note 4) |
| | 0 0 0 0 0 0 1 0 | Intercept tone on (see note 7) |
| | 0 0 0 0 0 0 1 1 | Network congestion tone on (see note 6) |
| | 0 0 0 0 0 1 0 0 | Busy tone on (see note 3) |
| | 0 0 0 0 0 1 0 1 | Confirm tone on (see note 5) |
| | 0 0 0 0 0 1 1 0 | Answer tone on (see note 5) |
| | 0 0 0 0 0 1 1 1 | Call waiting tone on (see note 3) |
| | 0 0 0 0 1 0 0 0 | Off-hook warning tone on (see note 5) |
| | 0 0 1 1 1 1 1 1 | Tones off |
| | 0 1 0 0 0 0 0 0 | Alerting on - pattern 0 (see note 2) |
| | 0 1 0 0 0 0 0 1 | Alerting on - pattern 1 (see note 2) |
| | 0 1 0 0 0 0 1 0 | Alerting on - pattern 2 (see note 2) |
| | 0 1 0 0 0 0 1 1 | Alerting on - pattern 3 (see note 2) |
| | 0 1 0 0 0 1 0 0 | Alerting on - pattern 4 (see note 2) |
| | 0 1 0 0 0 1 0 1 | Alerting on - pattern 5 (see note 2) |
| | 0 1 0 0 0 1 1 0 | Alerting on - pattern 6 (see note 2) |
| | 0 1 0 0 0 1 1 1 | Alerting on - pattern 7 (see note 2) |
| | 0 1 0 0 1 0 0 0 | Alerting on - continuous (see note 1) |
| | 0 1 0 0 1 1 1 1 | Alerting off |
| | All other values reserved. | |

A PT shall respond to all alerting patterns, but these may all produce the same sound.

NOTE 1: A FT may provide cadence following by sending an alternating sequence of alerting-on-continuous and alerting-off elements in {CC-INFO} messages while in the "CALL RECEIVED" state.

NOTE 2: The use of alerting patterns is FT dependent,; the resulting sound is PT dependent.

NOTE 3: This tone should be used in accordance with the description given in ITU-T Recommendation E.182 [44].

NOTE 4: This tone should be used in accordance with the "Ringing" tone description given in ITU-T Recommendation E.182 [44].

NOTE 5: No description is provided for the use of this tone. This coding is included to provide alignment to the coding provided in EN 300 403-1 [8].

NOTE 6: This tone should be used in accordance with the "congestion tone" description given in ITU-T Recommendation E.182 [44].

NOTE 7: This tone should be used in accordance with the "intrusion tone" description given in ITU-T Recommendation E.182 [44].

7.6.9 Timer restart




Figure 23: TIMER-RESTART information element

Restart value coding (octet 2):

| Bits | 8 7 6 5 4 3 2 1 | Meaning |
|------|----------------------------|---------------|
| | 0 0 0 0 0 0 0 0 | Restart timer |
| | 0 0 0 0 0 0 0 1 | Stop timer |
| | All other values reserved. | |

7.6.10 Test hook control

The purpose of the <<TEST-HOOK-CONTROL>> element is to convey the remote control of the PT hook switch for testing.




Figure 24: TEST-HOOK-CONTROL information element

Hook value coding (octet 2):

| Bits | 8 7 6 5 4 3 2 1 | Meaning |
|------|----------------------------|----------|
| | 0 0 0 0 0 0 0 0 | On-Hook |
| | 0 0 0 0 0 0 0 1 | Off-Hook |
| | All other values reserved. | |

7.7 Variable length information elements

7.7.1 Summary

Table 76 defines the coding that shall be used for the first octet of these elements, this octet uniquely identifies each element.

The reference number in the last column refers to the clause where the detailed coding of the element shall be found.

Table 76: Variable length information element coding

| Variable Length Elements | Bits | | | | | | | Reference | |
|-------------------------------|------|---|---|---|---|---|---|-----------|------------|
| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | | 1 |
| Info Type | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 7.7.20 |
| Identity type | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 7.7.19 |
| Portable identity | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 7.7.30 |
| Fixed identity | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 7.7.18 |
| Location area | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 7.7.25 |
| NWK assigned identity | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 1 | 7.7.28 |
| AUTH-TYPE | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 0 | 7.7.4 |
| Allocation type | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 1 | 7.7.2 |
| RAND | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 7.7.32 |
| RES | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 1 | 7.7.35 |
| RS | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 0 | 7.7.36 |
| IWU attributes | 0 | 0 | 0 | 1 | 0 | 0 | 1 | 0 | 7.7.21 |
| Call attributes | 0 | 0 | 0 | 1 | 0 | 0 | 1 | 1 | 7.7.5 |
| Service change info | 0 | 0 | 0 | 1 | 0 | 1 | 1 | 0 | 7.7.38 |
| Connection attributes | 0 | 0 | 0 | 1 | 0 | 1 | 1 | 1 | 7.7.11 |
| Cipher info | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 7.7.10 |
| Call identity | 0 | 0 | 0 | 1 | 1 | 0 | 1 | 0 | 7.7.6 |
| Connection identity | 0 | 0 | 0 | 1 | 1 | 0 | 1 | 1 | 7.7.12 |
| Facility | 0 | 0 | 0 | 1 | 1 | 1 | 0 | 0 | 7.7.15 |
| Progress indicator | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 0 | 7.7.31 |
| MMS Generic Header | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 7.7.47 |
| MMS Object Header | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 7.7.48 |
| MMS Extended Header | 0 | 0 | 1 | 0 | 0 | 0 | 1 | 0 | 7.7.49 |
| Time-Date | 0 | 0 | 1 | 0 | 0 | 0 | 1 | 1 | 7.7.50 |
| Multi-Display | 0 | 0 | 1 | 0 | 1 | 0 | 0 | 0 | 7.7.26 |
| Multi-Keypad | 0 | 0 | 1 | 0 | 1 | 1 | 0 | 0 | 7.7.27 |
| Feature Activate | 0 | 0 | 1 | 1 | 1 | 0 | 0 | 0 | 7.7.16 |
| Feature Indicate | 0 | 0 | 1 | 1 | 1 | 0 | 0 | 1 | 7.7.17 |
| Network parameter | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 7.7.29 |
| Ext h/o indicator | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 7.7.51 |
| ZAP field | 0 | 1 | 0 | 1 | 0 | 0 | 1 | 0 | 7.7.44 |
| Service class | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 0 | 7.7.39 |
| Key | 0 | 1 | 0 | 1 | 0 | 1 | 1 | 0 | 7.7.24 |
| Reject Reason | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 7.7.34 |
| Setup capability | 0 | 1 | 1 | 0 | 0 | 0 | 1 | 0 | 7.7.40 |
| Terminal capability | 0 | 1 | 1 | 0 | 0 | 0 | 1 | 1 | 7.7.41 |
| End-to-End compatibility | 0 | 1 | 1 | 0 | 0 | 1 | 0 | 0 | 7.7.14 |
| Rate parameters | 0 | 1 | 1 | 0 | 0 | 1 | 0 | 1 | 7.7.33 |
| Transit Delay | 0 | 1 | 1 | 0 | 0 | 1 | 1 | 0 | 7.7.42 |
| Window size | 0 | 1 | 1 | 0 | 0 | 1 | 1 | 1 | 7.7.43 |
| Calling Party Number | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 0 | 7.7.9 |
| Called Party Number | 0 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 7.7.7 |
| Called Party Subaddr | 0 | 1 | 1 | 1 | 0 | 0 | 0 | 1 | 7.7.8 |
| Duration | 0 | 1 | 1 | 1 | 0 | 0 | 1 | 0 | 7.7.13 |
| Segmented info | 0 | 1 | 1 | 1 | 0 | 1 | 0 | 1 | 7.7.37 |
| Alphanumeric | 0 | 1 | 1 | 1 | 0 | 1 | 1 | 0 | 7.7.3 |
| IWU-to-IWU | 0 | 1 | 1 | 1 | 0 | 1 | 1 | 1 | 7.7.23 |
| Model identifier | 0 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 7.7.46 |
| IWU-PACKET | 0 | 1 | 1 | 1 | 1 | 0 | 1 | 0 | 7.7.22 |
| Escape to proprietary | 0 | 1 | 1 | 1 | 1 | 0 | 1 | 1 | 7.7.45 |
| Escape for extension | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | (see note) |
| All other values are reserved | | | | | | | | | |

NOTE: When the <<ESCAPE-FOR-EXTENSION>> is used, the information element identifier is contained in octet 3 and the content of the information element follows in the subsequent octets as shown in the figure 25.

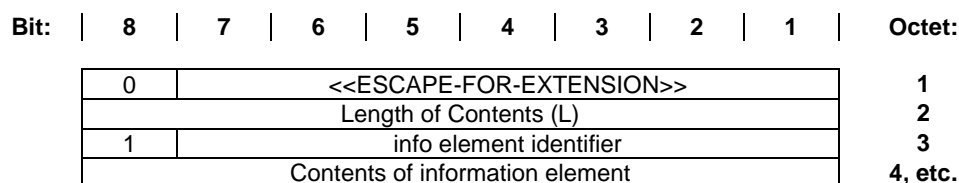


Figure 25: Information element format using ESCAPE-FOR-EXTENSION

7.7.2 Allocation type

The purpose of the <<ALLOCATION-TYPE>> information element is to define the authentication parameters for the key allocation procedure.

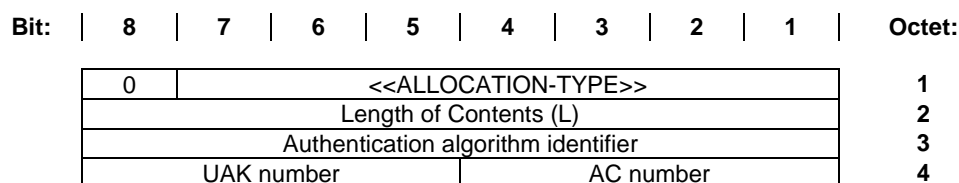


Figure 26: ALLOCATION-TYPE information element

Authentication algorithm identifier coding (octet 3):

Bits 8 7 6 5 4 3 2 1 **Meaning**
 0 0 0 0 0 0 0 1 DECT standard authentication algorithm 1
 All other values reserved.

User Authentication Key (UAK) number coding (octet 4):

Bits 8 7 6 5 **Meaning**
 Contains the binary coded number under which the allocated UAK shall be stored.
 If the MSB (bit 8) is set to 0, then the key shall be related to the active IPUI.
 If the MSB (bit 8) is set to 1, then the key shall be related to the active IPUI/PARK pair.

Authentication Code (AC) number (octet 4):

Bits 4 3 2 1 **Meaning**
 Contains the binary coded number of the selected authentication code.
 If the MSB (bit 4) is set to 0, then the key shall be related to the active IPUI.
 If the MSB (bit 4) is set to 1, then the key shall be related to the active IPUI/PARK pair.

7.7.3 Alphanumeric

The purpose of the <<ALPHANUMERIC>> element is to provide a transport mechanism for a family of alternative character sets in both directions.

This element shall not be used to carry dialling information.

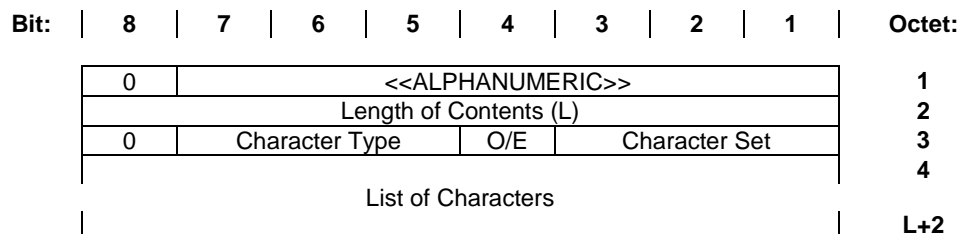


Figure 27: ALPHANUMERIC information element

Character type coding:

| Bits | 7 6 5 | Meaning (Character type) |
|------|----------------------------|---------------------------|
| | 0 0 0 | User specific |
| | 0 0 1 | Standard 8-bit characters |
| | 0 1 0 | Standard 4-bit characters |
| | All other values reserved. | |

Odd/even coding:

| Bits | 4 | Meaning |
|------|---|---------------------------|
| | 0 | Even number of characters |
| | 1 | Odd number of characters |

NOTE: The odd/even flag is only used when the character type is 4 bit. In all other cases it should be set to "even".

Standard 8-bit character set coding

Character set coding:

| Bits | 3 2 1 | Meaning (Character set) |
|------|-------|---|
| | 0 0 0 | Reserved |
| | 0 0 1 | DECT standard 8-bit characters (see annex D) |
| | 0 1 0 | IA5 characters (see ITU-T Recommendation T.50) |
| | 0 1 1 | Reserved (see ISO/IEC 2022 [13]) |
| | 1 0 0 | ERMES 7-bit characters (see ETS 300 133 [14], parts 1 to 7) |
| | 1 0 1 | Reserved [CT2/CAI characters] |
| | 1 1 0 | Standard ASCII (7 bit) characters (see ISO/IEC 646 [62]) |

All 8-bit characters shall always be coded with one character per octet. Multiple characters shall be interpreted in the order of ascending octet numbers. Characters that are originally coded in less than 8-bits shall be padded up to 8-bits as follows:

- the original character is placed in the octet, with the least significant bit in bit position "1";
- any unused bit positions are filled with "0".

Standard 4-bit character set coding

Character set coding:

| Bits | 3 2 1 | Meaning (Character set) |
|------|-------|---|
| | 0 0 0 | Reserved |
| | 0 0 1 | DECT standard 4-bit characters (see annex D) |
| | 1 0 0 | ERMES 4-bit characters (see ETS 300 133 [14]) |
| | | All other values reserved. |

4-bit characters shall always be coded with two characters per octet. Multiple characters shall be interpreted in the order of ascending octet numbers, and within each octet the high placed character (bits position 5-8) first.

7.7.4 Auth type

The purpose of the <<AUTH-TYPE>> information element is to define the authentication algorithm and the authentication key. In addition it may be used to send a ZAP increment command and/or to indicate if the cipher key shall be updated and/or sent.

| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
|------|-------------------------------------|-----------------|-----|-----|---------------------------|---|---|---|--------|
| | 0 | << AUTH-TYPE >> | | | | | | | 1 |
| | Length of Contents (L) | | | | | | | | 2 |
| | Authentication algorithm identifier | | | | | | | | 3 |
| | Proprietary algorithm identifier | | | | | | | | 3a |
| | Authentication key type | | | | Authentication key number | | | | 4 |
| | INC | 0 | TXC | UPC | Cipher key number | | | | 5 |

Figure 28: AUTH-TYPE information element

Authentication algorithm identifier coding (octet 3):

| Bits | 8 7 6 5 4 3 2 1 | Meaning |
|------|-----------------|--|
| | 0 0 0 0 0 0 0 1 | DECT standard authentication algorithm 1 |
| | 0 1 0 0 0 0 0 0 | GSM authentication algorithm |
| | 0 0 1 0 0 0 0 0 | UMTS authentication algorithm |
| | 0 1 1 1 1 1 1 1 | Escape to proprietary algorithm identifier |
| | | All other values reserved. |

Proprietary algorithm identifier (octet 3a):

This octet shall only be sent, when the authentication algorithm identifier coding (octet 3) indicates "escape to proprietary algorithm identifier".

Authentication Key (AK) type coding (octet 4):

| Bits | 8 7 6 5 | Meaning |
|------|---------|----------------------------|
| | 0 0 0 1 | User authentication key |
| | 0 0 1 1 | User personal identity |
| | 0 1 0 0 | Authentication code |
| | | All other values reserved. |

NOTE 1: The User Personal Identity (UPI) is always used in combination with an User Authentication Key (UAK), therefore the key type UPI identifies always a pair of keys (UPI plus UAK).

Authentication Key (AK) number (octet 4):

| Bits | 4 3 2 1 | Meaning |
|------|---------|--|
| | | Contains the binary coded number of the selected Authentication Key (AK) |
| | | If the MSB (bit 4) is set to 0, then the key shall be related to the active IPUI |
| | | If the MSB (bit 4) is set to 1, then the key shall be related to the active IPUI/PARK pair |

INC bit coding (octet 5):

| Bits | 8 | Meaning |
|------|---|--|
| | 0 | Leave value of the ZAP field unchanged |
| | 1 | Increment value of the ZAP field |

TXC bit coding (octet 5):

| Bits | 6 | Meaning |
|------|---|---|
| | 0 | Do not include the derived cipher key in the { AUTHENTICATION-REPLY } message |
| | 1 | Include the derived cipher key in the { AUTHENTICATION-REPLY } message |

UPC bit coding (octet 5):

| Bits | 5 | Meaning |
|------|---|--|
| | 0 | Do not store the derived cipher key |
| | 1 | Store the derived cipher key under the given cipher key number |

Cipher key number (octet 5):

| Bits | 4 3 2 1 | Meaning |
|------|---------|---|
| | | If the UPC bit is set to 1, then this field contains the binary coded number which is given to the newly derived cipher key |
| | | If the MSB (bit 4) is set to 0, then the key shall be related to the active IPUI |
| | | If the MSB (bit 4) is set to 1, then the key shall be related to the active IPUI/PARK pair |
| | | If the UPC bit is set to 0, then this field is not applicable and should be set to 0 |

NOTE 2: A derived cipher key is always related to the active IPUI and can be uniquely identified by the following three parameters, IPUI, cipher key type "derived" and cipher key number. A derived cipher key is not related to any specific cipher algorithm.

7.7.5 Call attributes

The purpose of the <<CALL-ATTRIBUTES>> element is to describe the higher layer service to be provided by the DECT protocol. The element may be repeated in a setup message when using service negotiation.

| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
|------|------------------------|---|----------------------------------|--------------------------|---|---|---|----|--------|
| 0 | << CALL-ATTRIBUTES >> | | | | | | | | 1 |
| | Length of Contents (L) | | | | | | | | 2 |
| 1 | Coding standard | | | NWK Layer Attributes | | | | | 3 |
| 1 | C-plane class | | | C-plane routing | | | | | 4 |
| 0/1 | U-plane symmetry | | | LU identification | | | | | 5 |
| 1 | 0 | 0 | LU identification F=>P direction | | | | | 5a | |
| 0/1 | U-plane class | | | U-plane frame type | | | | | 6 |
| 1 | U-plane class F=>P | | | U-plane frame type; F=>P | | | | | 6a |

Figure 29: CALL-ATTRIBUTES information element

Coding standard (octet 3):

| Bits | 7 6 | Meaning |
|------|-----|----------------------------|
| | 0 0 | DECT standard coding |
| | | All other values reserved. |

NWK layer attributes (octet 3):

| Bits | 5 4 3 2 1 | Meaning |
|------|-----------|------------------------------|
| | 0 0 0 0 0 | Undefined |
| | 0 0 0 0 1 | Basic speech |
| | 0 0 0 1 0 | DPRS |
| | 0 1 0 0 0 | DECT GSM IWP profile phase 2 |
| | 0 0 1 0 0 | DECT UMTS IWP |
| | | All other values reserved. |

C-plane class (octet 4):

| Bits | 7 6 5 | Meaning |
|------|-------|----------------------------|
| | 0 0 0 | Class U link; shared |
| | 0 1 0 | Class A link; shared |
| | 1 0 0 | Class B link; shared |
| | 1 0 1 | Class B link; independent |
| | | All other values reserved. |

C-plane routing (octet 4):

| Bits | 4 3 2 1 | Meaning |
|------|---------|--|
| | 0 0 0 0 | C _S only |
| | 0 0 0 1 | C _S preferred/C _F accepted |
| | 0 0 1 0 | C _F preferred/C _S accepted |
| | 0 1 0 0 | C _F only |
| | 1 1 0 0 | C _F only; dedicated bearer (see note) |
| | | All other values reserved. |

NOTE: When "dedicated bearer" is indicated, at least one bearer of the MAC connection is reserved for the C_F channel (i.e. not to be used for U-plane information). Otherwise, the C_F channel may be routed to either a dedicated bearer or a non-dedicated bearer (a bearer that may also carry U-plane information) (see EN 300 175-4 [4], clause 9.5.1.2 for details of dedicated bearer operation).

U-plane symmetry (octet 5):

| Bits | 7 6 | Meaning |
|------|-----|----------------------------|
| | 0 0 | Symmetric |
| | 1 0 | Asymmetric |
| | | All other values reserved. |

If symmetric, only octet 5 shall appear and this shall refer to both directions. If asymmetric octet 5 shall only refer to the direction P=>F and octet 5a shall refer to the direction F=>P.

LU identification (octet 5 and 5a):

| Bits | 5 4 3 2 1 | Meaning |
|------|-----------|----------------------------|
| | 0 0 0 0 1 | LU1 |
| | 0 0 0 1 0 | LU2 |
| | 0 0 0 1 1 | LU3 |
| | 0 0 1 0 0 | LU4 |
| | 0 0 1 0 1 | LU5 |
| | 0 0 1 1 0 | LU6 |
| | 0 0 1 1 1 | LU7 |
| | 0 1 0 0 0 | LU8 |
| | 0 1 0 0 1 | LU9 |
| | 0 1 0 1 0 | LU10 |
| | 0 1 0 1 1 | } |
| | to | }reserved for LU11 to LU15 |
| | 0 1 1 1 1 | } |
| | 1 0 0 0 0 | LU16 |
| | | All other values reserved. |

U-plane class (octets 6 and 6a):

| Bits | 7 6 5 | Meaning |
|------|----------------------------|----------------------|
| | 0 0 0 | Class 0 min_delay |
| | 0 0 1 | Class 0 normal_delay |
| | 0 1 0 | Class 1 |
| | 1 0 0 | Class 2; Go_Back_N |
| | 1 0 1 | Class 2; SElective |
| | 1 1 0 | Class 3 |
| | 1 1 1 | Not applicable |
| | All other values reserved. | |

U-plane frame type (octets 6 and 6a):

| Bits | 4 3 2 1 | Meaning |
|------|----------------------------|---------|
| | 0 0 0 1 | FU1 |
| | 0 0 1 0 | FU2 |
| | 0 0 1 1 | FU3 |
| | 0 1 0 0 | FU4 |
| | 0 1 0 1 | FU5 |
| | 0 1 1 0 | FU6 |
| | 0 1 1 1 | FU7 |
| | 1 0 0 0 | FU8 |
| | 1 0 0 1 | FU9 |
| | 1 0 1 0 | FU10a/c |
| | 1 0 1 1 | FU10b |
| | All other values reserved. | |

If symmetric is indicated in octet 5, only octet 6 shall appear and this shall refer to both directions. If asymmetric is indicated in octet 5, then octet 6 shall only refer to the direction P=>F and octet 6a shall refer to the direction F=>P.

7.7.6 Call identity

The purpose of the <<CALL-IDENTITY>> information element is to identify the call to which the message/procedure applies, e.g. to initiate ciphering of calls, to retrieve call related parameters.

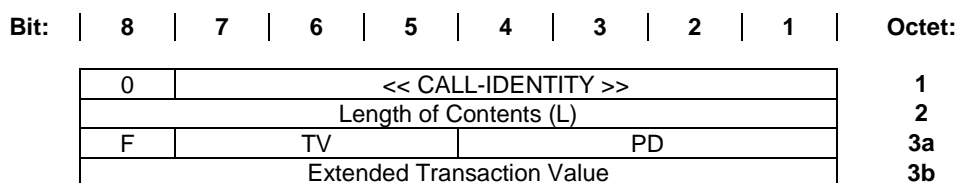


Figure 30: CALL-IDENTITY information element

The fields in this element shall be used to identify the CC, MM or COMS call that is to be ciphered. It does this by encapsulating the transaction value and protocol discriminator of the relevant call. If this element is omitted, the ciphering shall be understood to apply to all active calls.

NOTE: In general, the TI and PD will be different from the TI and PD that appear at the beginning of the message.

- for flag and transaction value coding (octet 3a) see clause 7.3;
- for protocol discriminator coding (octet 3a) see clause 7.2;
- for extended transaction value coding (octet 3b) see clause 7.3.

7.7.7 Called party number

The purpose of the <<CALLED-PARTY-NUMBER>> element is to identify the called party of a call in an en-bloc format.

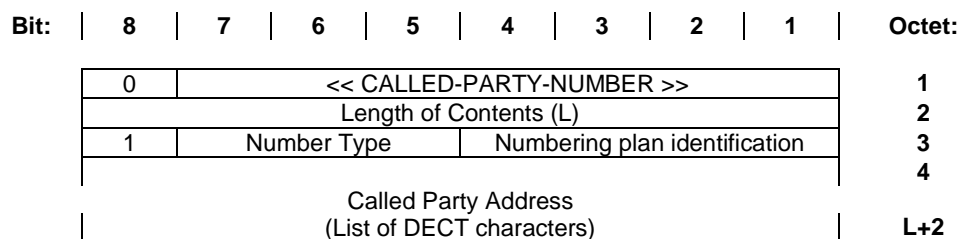


Figure 31: CALLED-PARTY-NUMBER information element

Number type (octet 3):

| Bits | 7 6 5 | Meaning |
|------|----------------------------|-------------------------|
| | 0 0 0 | Unknown |
| | 0 0 1 | International number |
| | 0 1 0 | National number |
| | 0 1 1 | Network specific number |
| | 1 0 0 | Subscriber number |
| | 1 1 0 | Abbreviated number |
| | 1 1 1 | Reserved for extension |
| | All other values reserved. | |

Numbering plan identification (octet 3):

| Bits | 4 3 2 1 | Meaning |
|------|----------------------------|--|
| | 0 0 0 0 | Unknown |
| | 0 0 0 1 | ISDN/telephony plan ITU-T Recommendations E.164/E.163 (see note 1) |
| | 0 0 1 1 | Data plan ITU-T Recommendation X.121 (see note 1) |
| | 0 1 1 1 | TCP/IP address (see note 2) |
| | 1 0 0 0 | National standard plan (see note 1) |
| | 1 0 0 1 | Private plan (see note 1) |
| | 1 0 1 0 | SIP addressing scheme, "To:" field (see RFC 2543 [70]) |
| | 1 0 1 1 | Internet character format address (see note 1) |
| | 1 1 0 0 | LAN MAC address (see note 1) |
| | 1 1 0 1 | ITU-T Recommendation X.400 [63] address (see note 1) |
| | 1 1 1 0 | Profile service specific alphanumeric identifier (see note 3) |
| | 1 1 1 1 | Reserved for extension |
| | All other values reserved. | |

NOTE 1: Standard IA5 codes (see clause D.2.3) are used. Bit number 8 is zero.

NOTE 2: The address shall be indicated as a natural binary code.

NOTE 3: The significance and format is defined in the associated profile for the selected service.

7.7.8 Called party subaddress

The purpose of the <<CALLED-PARTY-SUBADDRESS>> element is to identify the subaddress of the called party of a call.

| | | | | | | | | | | |
|-------------|--------------------------------|----------------------------|---|---|---------|---|---|---|---|---------------|
| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | Octet: |
| | 0 | << CALLED-PARTY-SUBADDR >> | | | | | | | | 1 |
| | Length of Contents (L) | | | | | | | | | 2 |
| | 1 | Subaddress Type | | | O/E ind | 0 | 0 | 0 | 0 | 3 |
| | List of Subaddress Information | | | | | | | | | 4 |
| | | | | | | | | | | L+2 |

Figure 32: CALLED-PARTY-SUBADDRESS information element

Subaddress type (octet 3):

| Bits | 7 6 5 | Meaning |
|------|----------------------------|---|
| | 0 0 0 | NSAP; ISO/IEC 8348 [21] |
| | 0 1 0 | User specified |
| | 1 0 0 | Profile service specific alphanumeric identifier (see note 1) |
| | All other values reserved. | |

NOTE 1: The significance and format is defined in the associated profile for the selected service.

Odd/even (octet 3):

| Bits | 4 | Meaning |
|------|---|--------------------------------|
| | 0 | Even number of address signals |
| | 1 | Odd number of address signals |

NOTE 2: The odd/even flag is used when the type of subaddress is "user specified" and the coding is Binary Coded Decimal (BCD). In all other cases it should be set to "even".

7.7.9 Calling party number

| | | | | | | | | | | |
|-------------|--|----------------------------|---|---|-------------------------------|---|---|---|---------------------|---------------|
| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | Octet: |
| | 0 | << CALLING-PARTY-NUMBER >> | | | | | | | | 1 |
| | Length of Contents (L) | | | | | | | | | 2 |
| | 0/1 | Number type | | | Numbering plan identification | | | | 3 | |
| | 1 | Present indicator | 0 | 0 | 0 | 0 | 0 | 0 | Screening indicator | 3a |
| | Calling Party Address (List of DECT characters) | | | | | | | | | 4 |
| | | | | | | | | | | L+2 |

Figure 33: CALLING-PARTY-NUMBER information element

Number type (octet 3):

| Bits | 7 6 5 | Meaning |
|------|----------------------------|-------------------------|
| | 0 0 0 | Unknown |
| | 0 0 1 | International number |
| | 0 1 0 | National number |
| | 0 1 1 | Network specific number |
| | 1 0 0 | Subscriber number |
| | 1 1 0 | Abbreviated number |
| | 1 1 1 | Reserved for extension |
| | All other values reserved. | |

Numbering plan identification (octet 3):

| Bits | 4 3 2 1 | Meaning |
|-------------|----------------|--|
| 0 0 0 0 | | Unknown |
| 0 0 0 1 | | ISDN/telephony plan ITU-T Recommendations E.164/E.163 (see note 1) |
| 0 0 1 1 | | Data plan Recommendation X.121 (see note 1) |
| 0 1 1 1 | | TCP/IP address (see note 2) |
| 1 0 0 0 | | National standard plan (see note 1) |
| 1 0 0 1 | | Private plan (see note 1) |
| 1 0 1 0 | | SIP addressing scheme, "From:" field (RFC 2543 [70]) |
| 1 0 1 1 | | Internet character format address (see note 1) |
| 1 1 0 0 | | LAN MAC address (see note 1) |
| 1 1 0 1 | | ITU-T Recommendation X.400 [63] address (see note 1) |
| 1 1 1 0 | | Profile service specific alphanumeric identifier (see note 3) |
| 1 1 1 1 | | Reserved for extension |

All other values reserved.

Presentation indicator (octet 3a):

| Bits | 7 6 | Meaning |
|-------------|------------|--------------------------------------|
| 0 0 | | Presentation allowed |
| 0 1 | | Presentation restricted (see note 4) |
| 1 0 | | Number not available (see note 4) |
| 1 1 | | Reserved. |

Screening indicator (octet 3a):

| Bits | 2 1 | Meaning |
|-------------|------------|------------------------------------|
| 0 0 | | User-provided, not screened |
| 0 1 | | User-provided, verified and passed |
| 1 0 | | User-provided, verified and failed |
| 1 1 | | Network provided. |

NOTE 1: Standard IA5 codes (see clause D.2.3) are used. Bit number 8 shall be set to zero.

NOTE 2: The address shall be indicated as a natural binary code.

NOTE 3: The significance and format is defined in the associated profile for the selected service.

NOTE 4: When Presentation is restricted or Number is not available the <Calling party address> may contain a default number or the octet group may be missing.

7.7.10 Cipher info

The purpose of the <<CIPHER-INFO>> information element is to indicate if a call shall be ciphered or not. In the case of ciphering it defines the cipher algorithm and the cipher key.

| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: | |
|-------------|----------------------------------|-----------------------------|---|---|-------------------|---|---|---|---------------|-----------|
| | 0 | << CIPHER-INFO >> | | | | | | | 1 | |
| | Length of Contents (L) | | | | | | | | | 2 |
| | Y/N | Cipher algorithm identifier | | | | | | | 3 | |
| | Proprietary algorithm identifier | | | | | | | | | 3a |
| | Cipher key type | | | | Cipher key number | | | | 4 | |

Figure 34: CIPHER-INFO information element

Y/N bit coding (octet 3):

| Bits | 8 | Meaning |
|-------------|----------|-------------------|
| 0 | | Disable ciphering |
| 1 | | Enable ciphering. |

Cipher algorithm identifier coding (octet 3):

| Bits | 7 6 5 4 3 2 1 | Meaning |
|------|---------------|--|
| | 0 0 0 0 0 0 1 | DECT standard cipher algorithm 1 |
| | 0 1 0 1 0 0 0 | GPRS ciphering not used |
| | 0 1 0 1 0 0 1 | GPRS encryption algorithm GEA/1 |
| | 0 1 0 1 0 1 0 | GPRS encryption algorithm GEA/2 |
| | 0 1 0 1 0 1 1 | GPRS encryption algorithm GEA/3 |
| | 0 1 0 1 1 0 0 | GPRS encryption algorithm GEA/4 |
| | 0 1 0 1 1 0 1 | GPRS encryption algorithm GEA/5 |
| | 0 1 0 1 1 1 0 | GPRS encryption algorithm GEA/6 |
| | 0 1 0 1 1 1 1 | GPRS encryption algorithm GEA/7 |
| | 1 1 1 1 1 1 1 | Escape to proprietary algorithm identifier |
| | | All other values reserved. |

Proprietary algorithm identifier (octet 3a):

This octet shall only be sent, when the cipher algorithm identifier coding (octet 3) indicates "escape to proprietary algorithm identifier".

Cipher key type coding (octet 4):

| Bits | 8 7 6 5 | Meaning |
|------|---------|----------------------------|
| | 1 0 0 1 | Derived cipher key |
| | 1 0 1 0 | Static cipher key |
| | | All other values reserved. |

Cipher key number (octet 4):

| Bits | 4 3 2 1 | Meaning |
|------|---------|--|
| | | Contains the binary coded number of the selected cipher key. |
| | | If the most significant bit (bit 4) is set to 0, then the key shall be related to the active IPUI. |
| | | If the MSB (bit 4) is set to 1, then the key shall be related to the active IPUI/PARK pair. |

NOTE: Different sets of static cipher keys could be used in different systems.

7.7.11 Connection attributes

The purpose of the <<CONNECTION-ATTRIBUTES>> element is to describe the connections that are required for the requested service.

| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
|------|------------------------|-------------------------------|---|--------------------------------|--------------------------|-----------------|---|---|--------|
| | 0 | << CONNECTION-ATTRIBUTES >> | | | | | | | 1 |
| | Length of Contents (L) | | | | | | | | 2 |
| | 1 | Symmetry | | | Connection identity | | | | 3 |
| | 0/1 | 0 | 0 | Target bearers P=>F direction | | | | | 4 |
| | 0/1 | 0 | 1 | Minimum bearers P=>F direction | | | | | 4a |
| | 0/1 | 1 | 0 | Target bearers F=>P direction | | | | | 4b |
| | 0/1 | 1 | 1 | Minimum bearers F=>P direction | | | | | 4c |
| | 0/1 | Slot size | | | MAC service | | | | 5 |
| | 1 | 0 | 0 | 0 | MAC service F=>P | | | | 5a |
| | 0/1 | CF channel attributes | | | MAC packet lifetime | | | | 6 |
| | 1 | CF channel attributes F=>P | | | MAC packet lifetime F=>P | | | | 6a |
| | 0/1 ext | A attributes | | | spare | B attributes | | | 7 |

Figure 35: CONNECTION-ATTRIBUTES information element

Symmetry:

| Bits | 7 6 5 | Meaning |
|-------------|--------------|--|
| | 0 0 1 | Symmetric connection |
| | 1 0 0 | Asymmetric F to P with 1 duplex bearer |
| | 0 1 0 | Asymmetric F to P or P to F with 1 duplex bearer |
| | 1 0 1 | Asymmetric F to P with 2 target duplex bearers |
| | 1 1 0 | Asymmetric P to F with 1 duplex bearer |
| | 1 1 1 | Asymmetric P to F with 2 target duplex bearers |
| | | All other values reserved. |

NOTE 1: A minimum of 1 duplex bearer is required for all asymmetric connections to provide the "pilot" bearer functions. Refer to EN 300 175-3 [3].

Connection identity coding (octet 3):

| Bits | 4 3 2 1 | Meaning |
|-------------|----------------|--------------------------------|
| | 0 0 0 0 | Unknown (not yet numbered) |
| | 1 N N N | Advanced connection number NNN |
| | | All other values reserved. |

NOTE 2: If already established, the (advanced) connection is identified using the Logical Connection Number (LCN) placed in position NNN.

Octets 4a, 4b and 4c are optional, but if present they shall appear in order shown. The following rules shall apply:

- if octet 4a is omitted, it shall be defaulted to the value given in octet 4;
- octets 4b and 4c shall be omitted if octet 3 indicates "symmetric";
- if octet 4c is omitted, it shall be defaulted to the value given in octet 4b.

NOTE 3: The meaning of octets 4, 4a, 4b and 4c is identified by the "bearer definition" coding in bits 7 and 6 as follows.

The Target and Minimum acceptable number of bearers specified in octet group 4 of this information element should be regarded as the range of bearers which is to be acceptable for the lifetime of the call (unless changed by a {CC-SERVICE-CHANGE} message procedure). The MAC may therefore dynamically change the number of MAC bearers during the lifetime of a call within these specified limits. If operation within the specified limits cannot be accomplished the call should be released.

Bearer definition coding (octets 4, 4a, 4b, 4c):

| Bits | 7 6 | Meaning |
|-------------|------------|---|
| | 0 0 | Target number of bearers; P=>F direction |
| | 0 1 | Minimum number of bearers; P=>F direction |
| | 1 0 | Target number of bearers; F=>P direction |
| | 1 1 | Minimum number of bearers; F=>P direction |

Number of bearers coding (octets 4, 4a, 4b, 4c):

| Bits | 5 4 3 2 1 | Meaning |
|-------------|------------------|--|
| | 0 0 0 0 0 | No U-plane |
| | n n n n n | Number of bearers ($1 \leq \text{Number} \leq 31$) |

NOTE 4: The number of bearers is coded with the natural binary value, with the least significant bit in bit position "1". Allowable values are "1" to "31".

If symmetric is indicated in octet 3, only octet 5 and 6 shall appear and these shall refer to both directions. If asymmetric is indicated in octet 3, then octet 5 and 6 shall only refer to the direction P=>F and octets 5a and 6a shall refer to the direction F=>P.

In all of these fields the "number of bearers" coding refers to the total number of individual (simplex) bearers.

MAC slot size (octet 5):

| Bits | 7 6 5 | Meaning |
|------|-------|----------------------------|
| | 0 0 0 | Half slot; $j = 0$. |
| | 1 0 0 | Full slot |
| | 1 0 1 | Double slot |
| | | All other values reserved. |

MAC service (octets 5 and 5a):

| Bits | 4 3 2 1 | Meaning |
|------|---------|----------------------------|
| | 0 0 0 0 | I_N ; minimum delay |
| | 0 0 0 1 | I_N ; normal delay |
| | 0 0 1 0 | I_P ; detect only |
| | 0 0 1 1 | I_P ; Mod-2 correct |
| | 0 1 0 0 | I_P ; encoded protected |
| | 0 1 1 0 | I_{PQ} ; detect only |
| | 0 1 1 1 | I_{PQ} ; Mod-2 correct |
| | | All other values reserved. |

 C_F channel attributes (octets 6 and 6a):

| Bits | 7 6 5 | Meaning |
|------|-------|---|
| | 0 0 0 | C_F never (CS only) |
| | 0 1 0 | C_F Demand/1 bearer (interrupting) |
| | 0 1 1 | C_F Demand/2 bearers (interrupting) |
| | 1 0 0 | C_F Reserved/1 bearer (non-interrupting) |
| | 1 0 1 | C_F Reserved/2 bearers (non-interrupting) |
| | | All other values reserved. |

NOTE 5: The C_F channel attributes indicate the intended usage of the C_F channel. In all cases the actual C_F usage is defined on a slot-by-slot basis for each connection by the DLC layer.

NOTE 6: The maximum packet lifetime (nnn) is only defined if the MAC service (octet 5 or 5a as appropriate) indicates I_P error_correct. The value "nnn" defines the allowed values of maximum packet lifetime using the coding given in clause 7.2.5.3.8 of EN 300 175-3 [3]. In this coding nnn = (0) indicates unlimited lifetime, and nnn = (1.to.7) indicates the maximum lifetime in TDMA frames. In all other cases the "Not applicable" coding is used.

MAC packet lifetime (octets 6 and 6a):

| Bits | 4 3 2 1 | Meaning |
|------|---------|--|
| | 0 0 0 0 | Not applicable |
| | 1 n n n | Maximum packet lifetime (I_P ; Mod-2 operation only) |
| | | All other values reserved. |

NOTE 7: The maximum packet lifetime (nnn) is coded with the natural binary value with the least significant bit in bit position "1". The allowable values are "0" to "7". The value "0" is interpreted as unlimited (i.e. infinite). The values "1" to "7" define the maximum lifetime in TDMA frames. Refer to EN 300 175-3 [3] for the use of this attribute.

A-field modulation scheme coding (octet 7):

| Bits | 7 6 5 | Meaning |
|------|-------|----------------------------|
| | 0 0 0 | 2-level |
| | 0 0 1 | 4-level |
| | 0 1 0 | 8-level |
| | | All other values reserved. |

(B+Z)-fields modulation scheme coding (octet 7):

| Bits | 3 2 1 | Meaning |
|------|-------|----------|
| | 0 0 0 | 2-level |
| | 0 0 1 | 4-level |
| | 0 1 0 | 8-level |
| | 0 1 1 | 16-level |
| | 1 0 1 | 64-level |

All other values reserved.

7.7.12 Connection identity

The purpose of the <<CONNECTION-IDENTITY>> element is to explicitly associate one or more U-plane link with an advanced connection (or connections) or allocate ECN for connections associated with a Broadband data link.

| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
|------|---|---------------------------|---|---|---------------------|---|---|---|--------|
| | 0 | << CONNECTION-IDENTITY >> | | | | | | | 1 |
| | Length of Contents (L) | | | | | | | | 2 |
| | U-plane link identity | | | | Connection identity | | | | 3 |
| | List of other U-plane/connection associations | | | | | | | | 3a |

Figure 36: CONNECTION-IDENTITY information element

Each octet defines an association between one U-plane link and one MAC connection (for the case of Broadband links see the end of this clause). All associations refer to one call as identified by the transaction identifier (transaction identifier information element at the start of the message).

Connection identity coding (octet 3):

| Bits | 4 3 2 1 | Meaning |
|------|---------|--------------------------------|
| | 0 0 0 0 | Unknown (not yet numbered) |
| | 1 N N N | Advanced connection number NNN |

All other values reserved.

NOTE 1: If already established, the (advanced) connection is identified using the Logical Connection Number (LCN) placed in position NNN.

Link identity coding:

| Bits | 8 7 6 5 | Meaning |
|------|---------|-------------------------|
| | 0 0 0 0 | U-plane Unnumbered link |
| | 0 1 1 1 | Broadband data link |
| | 1 N N N | U-plane Numbered link |

For further study
All other values reserved.

NOTE 2: Most calls only contain 1 unnumbered U-plane link. Numbered links use the 3-bit U-plane Link Number (ULN) placed in position NNN. Refer to EN 300 175-4 [4], clause 13.2, for details of U-plane link number coding.

Format of <<CONNECTION-IDENTITY>> element if the coding "Broadband data link" is used:

| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
|------|----------------------------|---------------------------|---|---|-----------------------|---|---|---|--------|
| | 0 | << CONNECTION-IDENTITY >> | | | | | | | 1 |
| | Length of Contents (L) | | | | | | | | 2 |
| | Broadband data link = 0111 | | | | Connection identity 1 | | | | 3 |
| | Connection identity 2 | | | | Connection identity 3 | | | | 3a |

Figure 36a

Connection identity coding (octet 3 and 3a):

| Bits | 4 | 3 | 2 | 1 | Meaning |
|------|----------------------------|---|---|---|-------------------------------------|
| | 1 | N | N | N | Logical connection number (LCN) NNN |
| | All other values reserved. | | | | |

The <Connection identity 1> indicates the LCN of the first established connection of a Broadband data link; the <Connection identity 2> and <Connection identity 3> indicate the LCN of up to two additional connections that can be associated with the same data link. A value "0000" in one of the fields of octet 3a indicates that only one additional LCN is allocated for additional connections associations.

7.7.13 Duration

The purpose of the <<DURATION>> information element is to indicate a time duration.

| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: | |
|------|------------------------|----------------|---|---|-------------|---|---|---|--------|----|
| | 0 | << Duration >> | | | | | | | 1 | |
| | Length of Contents (L) | | | | | | | | | 2 |
| | 0/1 | Lock Limits | | | Time Limits | | | | 3 | |
| | Time duration | | | | | | | | | 3a |

Figure 37: DURATION information element

Lock limits coding (octet 3):

| Bits | 7 | 6 | 5 | Meaning |
|------|---|---|---|--------------------------------------|
| | 1 | 1 | 0 | Temporary user limit (see note 1) |
| | 1 | 1 | 1 | No limits |
| | 1 | 0 | 1 | Temporary user limits 2 (see note 1) |

NOTE 1: "Temporary user limit" indicates that a time limit applies when the PP leaves the locked state with the relevant FP (see EN 300 175-6 [5]).

Time limits coding (octet 3):

| Bits | 4 | 3 | 2 | 1 | Meaning |
|------|---|---|---|---|----------------------------------|
| | 0 | 0 | 0 | 0 | Erase (time limit zero) |
| | 0 | 0 | 0 | 1 | Defined time limit 1 |
| | 0 | 0 | 1 | 0 | Defined time limit 2 |
| | 0 | 1 | 0 | 0 | Standard time limit (see note 2) |
| | 1 | 1 | 1 | 1 | Infinite |

If a defined time limit is indicated, octet 3a shall follow.

NOTE 2: If a standard time limit is indicated, the standard time limit for the relevant procedure applies.

Time duration (octet 3a)

The time duration is binary coded (bit 1 being the least significant bit). The time duration defines time in units based on the MAC layer multiframes. Multiframes are defined in EN 300 175-3 [3].

Defined time limit 1: 1 unit = 2^8 multiframes.

Defined time limit 2: 1 unit = 2^{16} multiframes (see note 3).

NOTE 3: This unit corresponds to the most significant octet of the multiframe number that may be transmitted by FPs (see EN 300 175-3 [3]).

7.7.14 End-to-end compatibility

The purpose of the <<END-TO-END-COMPATIBILITY>> element is to exchange some aspects of the end-to-end data terminal capabilities between PT and FT during call establishment.

| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
|------|---------------------------|------------|-----------|--------|--------|--------|-------|-----------------|--------|
| 0 | << END-TO-END-COMPATIB >> | | | | | | | | 1 |
| | Length of Contents (L) | | | | | | | | 2 |
| 0/1 | S/A | Neg | User rate | | | | | | 3 |
| 0/1 | Intermediate rate | | NIC tx | NIC rx | F-C tx | F-C rx | 0 spr | 3a (see note 2) | |
| 0/1 | Stop bits | | Data bits | | Parity | | | 3b | |
| 1 | Dup | Modem type | | | | | | 3c | |

NOTE 1: This information element may only be included in a {CC-SETUP} message that also contains the <<IWU-ATTRIBUTES>> element.

NOTE 2: This octet is included if the service ITU-T Recommendation V.110 [58]/X.30 [60] rate adaption is indicated in the <<IWU-ATTRIBUTES>>. Octet 3a may be included in other cases to extend into octets 3b and 3c but octet 3a should be ignored in these other cases.

Figure 38: END-TO-END-COMPATIBILITY information element

Synchronous/Asynchronous (S/A) (octet 3):

| Bits | 7 | Meaning |
|------|---|--------------|
| | 0 | Synchronous |
| | 1 | Asynchronous |

NOTE 3: Octets 3a, 3b, 3c may be omitted if octet 3 indicates "synchronous" user rates.

Negotiation (Neg) (octet 3):

| Bits | 6 | Meaning |
|------|---|---|
| | 0 | In-band negotiation not possible |
| | 1 | In band negotiation possible (see note 4) |

NOTE 4: "In band negotiation possible" is only used in the context of ITU-T Recommendation V.110 [58] and ITU-T Recommendation X.30 [60] rate adaption.

User rate coding (octet 3):

| Bits | 5 4 3 2 1 | Meaning |
|------|-----------|---|
| | 0 0 0 0 1 | 0,6 kbit/s; V.6 and X.1. |
| | 0 0 0 1 0 | 1,2 kbit/s; V.6. |
| | 0 0 0 1 1 | 2,4 kbit/s; V.6 and X.1. |
| | 0 0 1 0 0 | 3,6 kbit/s; V.6. |
| | 0 0 1 0 1 | 4,8 kbit/s; V.6 and X.1. |
| | 0 0 1 1 0 | 7,2 kbit/s; V.6. |
| | 0 0 1 1 1 | 8,0 kbit/s; I.460. |
| | 0 1 0 0 0 | 9,6 kbit/s; V.6 and X.1. |
| | 0 1 0 0 1 | 14,4 kbit/s; V.6. |
| | 0 1 0 1 0 | 16 kbit/s; I.460. |
| | 0 1 0 1 1 | 19,2 kbit/s; V.6. |
| | 0 1 1 0 0 | 32 kbit/s; I.460. |
| | 0 1 1 1 0 | 48 kbit/s; V.6 and X.1. |
| | 0 1 1 1 1 | 56 kbit/s; V.6. |
| | 1 0 0 0 0 | 64 kbit/s; X.1. |
| | 1 0 1 0 1 | 0,1345 kbit/s; X.1. |
| | 1 0 1 1 0 | 0,1 kbit/s; X.1. |
| | 1 0 1 1 1 | 0,075/1,2 kbit/s; V.6 and X.1. (see note 5) |
| | 1 1 0 0 0 | 1,2/0,075 kbit/s; V.6 and X.1. (see note 5) |
| | 1 1 0 0 1 | 0,050 kbit/s; V.6 and X.1. |
| | 1 1 0 1 0 | 0,075 kbit/s; V.6 and X.1. |
| | 1 1 0 1 1 | 0,110 kbit/s; V.6 and X.1. |
| | 1 1 1 0 0 | 0,150 kbit/s; V.6 and X.1. |
| | 1 1 1 0 1 | 0,200 kbit/s; V.6 and X.1. |
| | 1 1 1 1 0 | 0,300 kbit/s; V.6 and X.1. |
| | 1 1 1 1 1 | 12 kbit/s; V.6. |

All other values reserved.

NOTE 5: The first rate is the transmit rate in the forward direction of the call. The second rate is the transmit rate in the backward direction of the call.

NOTE 6: See ITU-T Series V Recommendations.
See ITU-T Series X Recommendations.
See ITU-T Recommendation I.460.

Intermediate rate (interim rate) (octet 3a):

| Bits | 7 6 | Meaning |
|------|-----|-----------|
| | 0 0 | Not used |
| | 0 1 | 8 kbit/s |
| | 1 0 | 16 kbit/s |
| | 1 1 | 32 kbit/s |

Network Independent Clock on transmission (NIC tx) (octet 3a):

| Bits | 5 | Meaning |
|------|---|--|
| | 0 | Not required to send data with network independent clock |
| | 1 | Required to send data with network independent clock |

NOTE 7: NIC tx refers to transmission in the forward direction of the call.

NOTE 8: See ITU-T Recommendation V.110 [58] and ITU-T Recommendation X.30 [60].

Network Independent Clock on reception (NIC rx) (octet 3a):

| Bits | 4 | Meaning |
|------|---|--|
| | 0 | Cannot accept data with Network independent clock |
| | 1 | Required to send data with Network independent clock |

NOTE 9: NIC rx refers to transmission in the backward direction of the call.

NOTE 10: See ITU-T Recommendation V.110 [58] and ITU-T Recommendation X.30 [60].

Flow-Control on transmission (F-C tx) (octet 3a):

| Bits | 3 | Meaning |
|------|---|---|
| | 0 | Not required to send data with flow control mechanism |
| | 1 | Required to send data with flow control mechanism |

NOTE 11: F-C tx refers to transmission in the forward direction of the call.

Flow-Control on reception (F-C rx) (octet 3a):

| Bits | 2 | Meaning |
|------|---|---|
| | 0 | Cannot accept data with flow control mechanism (i.e. sender does not support this optional procedure) |
| | 1 | Can accept data with flow control mechanism (i.e. sender does support this optional procedure) |

NOTE 12: F-C rx refers to transmission in the backward direction of the call.

Stop bits coding (octet 3b):

| Bits | 7 6 | Meaning |
|------|-----|----------|
| | 0 0 | Not used |
| | 0 1 | 1 bit |
| | 1 0 | 1,5 bits |
| | 1 1 | 2 bits |

Data bits coding (octet 3b):

| Bits | 5 4 | Meaning |
|------|-----|----------|
| | 0 0 | Not used |
| | 0 1 | 5 bits |
| | 1 0 | 7 bits |
| | 1 1 | 8 bits |

Parity coding (octet 3b):

| Bits | 3 2 1 | Meaning |
|------|----------------------------|-------------|
| | 0 0 0 | Odd |
| | 0 1 0 | Even |
| | 0 1 1 | None |
| | 1 0 0 | Forced to 0 |
| | 1 0 1 | Forced to 1 |
| | All other values reserved. | |

Duplex mode (Dup) (octet 3c):

| Bits | 7 | Meaning |
|------|---|-------------|
| | 0 | Half duplex |
| | 1 | Full duplex |

Modem type (octet 3c):

| Bits | 6 5 4 3 2 1 | Meaning |
|------|----------------|-----------------------------|
| | 0 0 0 0 0 0 | Reserved |
| | 0 0 0 0 0 1 | V.21 |
| | 0 0 0 0 1 0 | V.22 |
| | 0 0 0 0 1 1 | V.22 bis |
| | 0 0 0 1 0 0 | V.23 |
| | 0 0 0 1 0 1 | V.26 |
| | 0 0 0 1 1 0 | V.26 bis |
| | 0 0 0 1 1 1 | V.26 ter |
| | 0 0 1 0 0 0 | V.27 |
| | 0 0 1 0 0 1 | V.27 bis |
| | 0 0 1 0 1 0 | V.27 ter |
| | 0 0 1 0 1 1 | V.29 |
| | 0 0 1 1 0 0 | V.32 |
| | 0 0 1 1 0 1 | V.35 |
| | 1 0 0 0 0 0 to | } Reserved for national use |
| | 1 1 1 1 1 1 } | |
| | | All other values reserved. |

NOTE 13: See ITU-T Series V Recommendations.

7.7.15 Facility

The purpose of the <<FACILITY>> information element is to indicate the invocation and operation of supplementary services, identified by the corresponding operation value within the <<FACILITY>> information element.

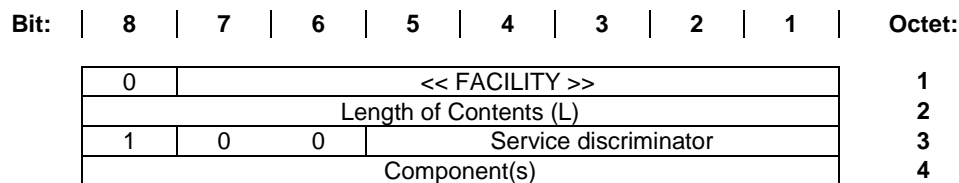


Figure 39: FACILITY information element

Service discriminator coding:

| Bits | 5 4 3 2 1 | Meaning |
|------|-----------|--|
| | 1 0 0 0 1 | Discriminator for supplementary service applications |
| | | All other values are reserved. |

Regarding the coding and the use of the components, see EN 300 196-1 [16].

7.7.16 Feature activate

The purpose of the <<FEATURE-ACTIVATE>> information element is to activate a feature as identified in the feature field.

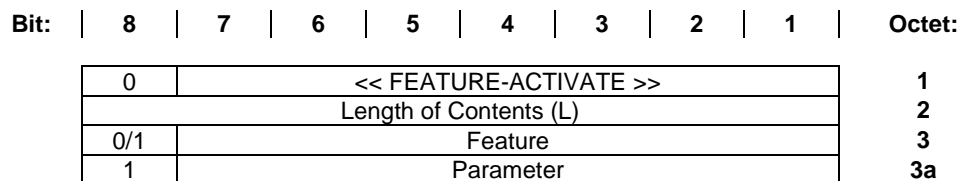


Figure 40: FEATURE-ACTIVATE information element

Feature coding (octet 3):

| Bits | 7 6 5 4 3 2 1 | Meaning | Parameter |
|------|----------------------------|-----------------------------------|-----------|
| | 0 0 0 0 0 0 1 | Register recall | no |
| | 0 0 0 1 1 1 1 | External handover switch | no |
| | 0 1 0 0 0 0 0 | Queue entry request | no |
| | 0 1 1 0 0 0 0 | Indication of subscriber number | no |
| | 1 0 0 0 0 1 0 | Feature key | yes |
| | 1 0 0 0 1 0 0 | Specific line selection | yes |
| | 1 0 0 0 1 1 1 | Specific trunk carrier selection | yes |
| | 1 0 0 1 0 0 0 | Control of echo control functions | yes |
| | 1 1 0 0 0 0 0 | Cost information | yes |
| | All other values reserved. | | |

External handover switch: indication from the PT to the FT that the call shall be immediately rerouted.

Queue entry request: request to enter outgoing call queue.

Indication of subscriber number: indication to the user of the subscriber number allocated to the user, e.g. during a temporary registration on a visited network.

Feature key:

Parameter (octet 3a)

| Value (hex) | Meaning |
|-------------|--|
| 00 | Reserved |
| nn | Feature key nn with $01 \leq nn \leq 7F$ |

Specific line selection: the ability to select a specific line (internal or external) on which to make or receive a call.

Parameter (octet 3a):

| Value (hex) | Meaning |
|-------------|--|
| 00 | General selection |
| nn | Selection nn with $01 \leq nn \leq 7F$ |

Specific trunk carrier selection: the ability to select a specific trunk carrier for a call through a global network.

Parameter (octet 3a):

| Value (hex) | Meaning |
|-------------|--|
| 00 | Default |
| nn | Selection nn with $01 \leq nn \leq 7F$ |

Control of echo control functions: the ability to connect or disconnect FP echo control functions, depending on e.g. the type of service and call routing information.

Parameter coding (octet 3a)

Bit 7 is reserved.

| Bits | 6 5 | Meaning |
|------|-----|--|
| | 0 0 | Option a) and b) disconnected (see note 1) |
| | 0 1 | Only option a) connected (see note 1) |
| | 1 0 | Only option b) connected (see note 1) |
| | 1 1 | No change (see note 1) |

| Bits | 4 3 | Meaning |
|------|-----|---|
| | 0 0 | Disconnect for requirement 2 (see note 2) |
| | 0 1 | Connect ≥ 9 dB for requirement 2 (see note 2) |
| | 1 0 | Connect reduced loss for requirement 2 (see note 2) |
| | 1 1 | No change for requirement 2 (see note 2) |

| Bits | 2 1 | Meaning |
|------|-----|---|
| | 0 0 | Disconnect for requirement 1 (see note 2) |
| | 0 1 | Connect for requirement 1 (see note 2) |
| | 1 0 | Reserved for requirement 1 (see note 2) |
| | 1 1 | No change for requirement 1 (see note 2) |

NOTE 1: Refer to EN 300 175-8 [7], clause 7.4.1.2.

NOTE 2: Refer to EN 300 175-8 [7], clause 7.10.

Cost information: indication to the user of the call charge or call tariff. It may be used to invoke activation of this feature for all calls or on call-by-call basis. In the first case it is a Call Independent Supplementary Service (CISS) and the information element is placed in one of the CISS messages (see clause 6.2.2). In the second case it is a Call Related Supplementary Service (CRSS) and the information element is placed in an allowed CC message as specified in clause 6.3.

Parameter (octet 3a):

| Bits | 7 6 5 | Meaning |
|----------------------------|-------|--|
| | 0 0 1 | DECT internal cost information |
| | 0 1 1 | Cost information for the complete connection |
| All other values reserved. | | |

Parameter (octet 3a):

| Bits | 4 3 2 1 | Meaning |
|----------------------------|---------|--|
| | 0 0 0 0 | Tariff information |
| | 0 0 0 1 | Charging pulses during the call |
| | 0 0 1 0 | Calculated amount of charge at the end of the call |
| All other values reserved. | | |

7.7.17 Feature indicate

The purpose of the <<FEATURE-INDICATE>> information element is to allow the FT to convey feature indications to the user regarding the status of an activated feature.

| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
|------|------------------------|------------------------|---|---|---|---|---|---|----------|
| | 0 | << FEATURE-INDICATE >> | | | | | | | 1 |
| | Length of Contents (L) | | | | | | | | 2 |
| | 0/1 | Feature | | | | | | | 3 |
| | 1 | Parameter | | | | | | | 3a |
| | Status indicator | | | | | | | | 4 |
| | Component(s) | | | | | | | | 5 to L+2 |

Figure 41: FEATURE-INDICATE information element

Feature coding (octet 3)

| Bits | 7 6 5 4 3 2 1 | Meaning | Parameter |
|----------------------------|---------------|-----------------------------------|-----------|
| | 0 0 0 0 0 0 1 | Register recall | no |
| | 0 0 0 1 1 1 1 | External handover switch | no |
| | 0 1 0 0 0 0 0 | Queue entry request | no |
| | 0 1 1 0 0 0 0 | Indication of subscriber number | no |
| | 1 0 0 0 0 1 0 | Feature key | yes |
| | 1 0 0 0 1 0 0 | Specific line selection | yes |
| | 1 0 0 0 1 1 1 | Specific trunk carrier selection | yes |
| | 1 0 0 1 0 0 0 | Control of echo control functions | yes |
| | 1 1 0 0 0 0 0 | Cost information | yes |
| All other values reserved. | | | |

The meaning of the features is the same as described in more detail for the <<FEATURE-ACTIVATE>> information element.

Parameter (octet 3a):

The parameter coding is the same as defined for the <<FEATURE-ACTIVATE>> information element.

The status indicator field (octet 4) identifies the current status of an activated feature.

Status indicator coding:

| Bits | 8 7 6 5 4 3 2 1 | Status | Meaning |
|----------------------------|-----------------|-------------|--|
| | 1 0 0 0 0 0 0 0 | Deactivated | Service request rejected |
| | 1 0 0 0 0 0 0 1 | Activated | Service request accepted, feature is activated |
| | 1 0 0 0 0 0 1 1 | Pending | Service request accepted, feature is pending |
| | 1 0 0 0 0 1 0 0 | Deactivated | Service busy |
| | 1 0 0 0 0 1 1 0 | Deactivated | Service unobtainable |
| All other values reserved. | | | |

Component coding (octet 5) for feature "queue entry request": the component consists of one octet. It gives the current position in the queue and is coded with the natural binary value.

Component coding (octet 5 to L+2) for feature "indication of subscriber number": the subscriber number shall be coded as a list of DECT standard characters as defined in annex D.




Figure 42: Subscriber number indication coding

Component coding (octet 5 to L+2) for feature "cost information": when the <<FEATURE-INDICATE>> information element is used to carry "cost information" then one or more components can be included. Each of these components is coded as defined below:

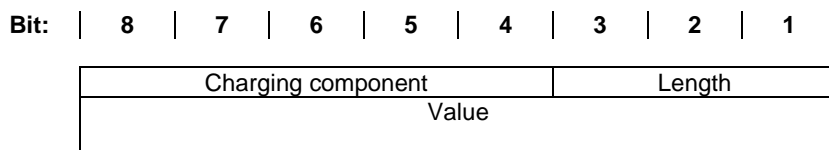


Figure 43: Cost information coding

Charging component coding:

| Bits | 8 7 6 5 4 | Name | Meaning |
|----------------------------|-----------|--------|--|
| | 0 0 0 0 0 | c0 | Reserved |
| | 0 0 0 0 1 | c1 | Units per interval |
| | 0 0 0 1 0 | c2 | Seconds per time interval |
| | 0 0 0 1 1 | c3 | Scaling factor |
| | 0 0 1 0 0 | c4 | Unit increment |
| | 0 0 1 0 1 | c5 | Units per data interval |
| | 0 0 1 1 0 | c6 | Segments per data interval |
| | 0 0 1 1 1 | c7 | Initial seconds per time interval |
| | 0 1 0 0 0 | c8 | Reserved |
| | 0 1 0 0 1 | c9 | Reserved |
| | 0 1 0 1 0 | c10 | Fixed cost for access to a specific network |
| | 0 1 0 1 1 | c11 | Calculated charged amount |
| | 0 1 1 0 0 | c12 | Fixed supplementary service cost |
| | 0 1 1 0 1 | c13 | Supplementary service cost per time interval |
| | 0 1 1 1 0 | c14 | Pulse |
| | 0 1 1 1 1 | c15 | Reserved |
| | 1 0 - - - | c16-23 | Network proprietary components |
| All other values reserved. | | | |

Component c1: this component defines the number of unit increments per interval. It is set in terms of visited location area units per interval.

Component c2: this component defines the time interval for unitization and is specified in seconds.

Component c3: this component defines the scaling factor to convert from visited location area units to home location area units. It is a dimensionless multiplier.

Component c4: this component defines the number of unit increments on receipt of the message containing the cost information. It is specified in units of the visited location area.

Component c5: this component defines the number of unit increments per data interval. It is set in terms of visited location area units per interval.

Component c6: this component defines the data usage interval for unitization.

Component c7: this component defines the initial time interval for unitization.

Component c10: this component defines a fixed cost for access to a specific network.

Component c11: this component defines the calculated cost in either the currency of the home location area or the visited location area.

Component c12: this component defines a fixed cost for a specific supplementary service.

Component c13: this component defines the cost per time interval for a specific supplementary service.

Component c14: this component represents one pulse.

Length coding: this 3 bit number defines the length of the value field in octets and is coded with the natural binary value.

Value coding: this field contains the value of the charging components and is coded with the natural binary value.

| Component | Resolution of the value |
|-----------|-------------------------|
| c1 | 0,1 |
| c2 | 0,1 |
| c3 | 0,01 |
| c4 | 0,1 |
| c5 | 0,1 |
| c6 | 1,0 |
| c7 | 0,1 |
| c10 | 0,1 |
| c11 | 0,1 |
| c12 | 0,1 |
| c13 | 0,1 |
| c14 | 0,1 |

7.7.18 Fixed identity

The purpose of the <<FIXED-IDENTITY>> information element is to transport a DECT fixed identity or a Portable Access Rights Key (PARK). Refer to EN 300 175-6 [5], describing identities and addressing.

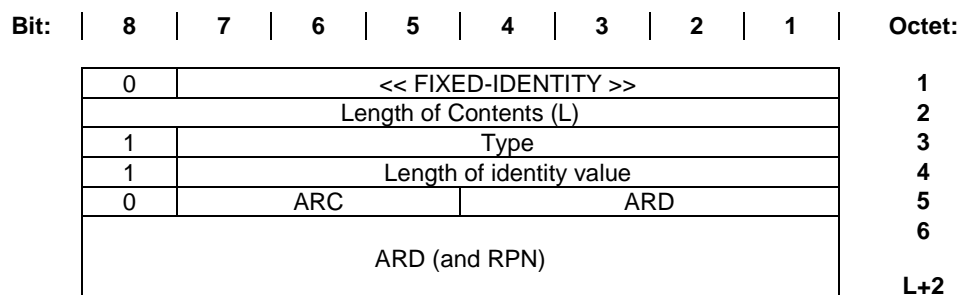


Figure 44: FIXED-IDENTITY information element

Type coding (octet 3):**Bits 7 6 5 4 3 2 1 Meaning**

0 0 0 0 0 0 0 Access rights identity
 0 0 0 0 0 0 1 Access rights identity plus radio fixed part number
 0 0 0 0 0 1 0 Access rights identity plus radio fixed part number for WRS
 0 1 0 0 0 0 0 Portable access rights key
 All other values reserved.

Length of identity value coding (octet 4): the length is defined in bits, and this is coded with the natural binary value. The least significant bit of the coding appears in bit position 1.

Length of identity value coding for identity type "ARI".
 Length of identity value coding = 1 + (number of ARI bits).
 Length of identity value coding for identity type "ARI + RPN".

Bits 7 6 5 4 3 2 1 Meaning

0 1 0 1 0 0 0 40 bits

Length of identity value coding for identity type "PARK".
 Length of identity value = 1 + PARK length indicator.

Access rights class coding (octet 5): refer to EN 300 175-6 [5].

Access Rights Details (ARD) coding (octet 5 to L+2): refer to EN 300 175-6 [5]. The MSB of the ARD is bit 4 in octet 5. The order of bit values progressively decreases as the octet number increases. Unused bits in the last octet should be coded as 0.

Radio fixed Part Number (RPN) (octet L+2): for identity type "ARI + RPN" also the RPN is contained, where the LSB of the RPN is bit 1 in octet L+2. For the identity types "ARI" and "PARK" no RPN is included. For Identity type "ARI + RPN for WRS" the RPN shall be the RPN of the WRS.

7.7.19 Identity type

The purpose of the <<IDENTITY-TYPE>> information element is to indicate a specific identity type, e.g. used by the FT when requesting for a specific PT identity. Refer to EN 300 175-6 [5].

| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
|------|------------------------|---|---|----------------|---|---|---|---|--------|
| 0 | << IDENTITY-TYPE >> | | | | | | | | 1 |
| | Length of Contents (L) | | | | | | | | 2 |
| 1 | 0 | 0 | 0 | Identity group | | | | | 3 |
| 1 | Type | | | | | | | | 4 |

Figure 45: IDENTITY-TYPE information element

Identity group coding (octet 3):**Bits 4 3 2 1****Meaning**

0 0 0 0 Portable identity
 0 0 0 1 Network assigned identity
 0 1 0 0 Fixed identity (also including the Portable Access Rights Key PARK)
 1 0 0 0 Application assigned
 1 1 1 1 Proprietary (application specific)
 All other values reserved.

Type coding for identity group "portable identity" (octet 4):

Bits 7 6 5 4 3 2 1 Meaning
 0 0 0 0 0 0 0 International Portable User Identity (IPUI)
 0 0 1 0 0 0 0 International Portable Equipment Identity (IPEI)
 0 1 0 0 0 0 0 Temporary Portable User Identity (TPUI)
 All other values reserved.

Type coding for identity group "fixed identity" (also including PARK) (octet 4):

Bits 7 6 5 4 3 2 1 Meaning
 0 0 0 0 0 0 0 Access rights identity
 0 0 0 0 0 0 1 Access rights identity plus radio fixed part number
 0 1 0 0 0 0 0 Portable Access Rights Key (PARK)
 All other values reserved.

Type coding for identity group "network assigned identity" (octet 4):

Bits 7 6 5 4 3 2 1 Meaning
 1 1 1 0 1 0 0 Temporary mobile subscriber identity
 1 1 1 1 1 1 1 Proprietary (application specific)
 All other values reserved.

Type coding for identity group "application assigned" (octet 4):

Bits 7 6 5 4 3 2 1 Meaning
 0 1 1 0 0 0 0 Ethernet (IEEE 802.3) Address
 0 1 1 0 0 0 1 Token Ring Address
 0 1 1 0 0 1 0 Internet Protocol Version 4 Address (IPv4), RFC 791 [67]
 0 1 1 0 0 1 1 Internet Protocol Version 6 Address (IPv6), RFC 2460 [69]
 All other values reserved.

7.7.20 Info type

The purpose of the <<INFO-TYPE>> information element is to indicate the type (or types) of requested or transmitted information.

| | | | | | | | | | |
|-------------|------------------------|--|---|---|---|---|---|---|---------------|
| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
| | 0 | << INFO-TYPE >> | | | | | | | 1 |
| | Length of Contents (L) | | | | | | | | 2 |
| | 0/1 ext | List of one or more parameter types | | | | | | | 3 |

Figure 46: INFO-TYPE information element

Parameter type coding (octet 3):

| Bits | 7 6 5 4 3 2 1 | Meaning |
|----------------------------|---------------|---|
| 0000000 | | Locate suggest |
| 0000001 | | Access rights modify suggest |
| 0000100 | | Authentication of PP failure |
| 0000110 | | Dynamic parameters allocation |
| 0001000 | | External handover parameters (see note) |
| 0001001 | | Location area |
| 0001010 | | Hand over reference |
| 0001011 | | Multiframe and PSCN synchronized external handover candidate |
| 0001100 | | External handover candidate |
| 0001101 | | Multiframe synchronized external handover candidate |
| 0001111 | | Multiframe, PSCN and multiframe number synchronized external handover candidate |
| 0001110 | | Non synchronized external handover candidate |
| 0010000 | | Old fixed part identity |
| 0010001 | | Old network assigned identity |
| 0010010 | | Old network assigned location area |
| 0010011 | | Old network assigned handover reference |
| 0100000 | | Billing |
| 0100001 | | Debiting |
| 0100010 | | CK transfer |
| 0100011 | | Handover failed, reversion to old channel |
| 0100100 | | OA&M call |
| 0100101 | | Distributed Communication Download |
| 0110000 | | Ethernet (IEEE 802.3) Address |
| 0110001 | | Token Ring Address |
| 0110010 | | Internet Protocol Version 4 Address (IPv4), RFC 791 [67] |
| 0110011 | | Internet Protocol Version 6 Address (IPv6), RFC 2460 [69] |
| 0110100 | | Identity allocation |
| All other values reserved. | | |

NOTE: External handover parameters includes both handover reference and external handover candidate(s).

7.7.21 InterWorking Unit (IWU) attributes

The purpose of the <<IWU-ATTRIBUTES>> element is to provide a means for service compatibility information to be exchanged (e.g. between a PP application and a FP interworking unit). This element is transferred transparently by the DECT protocol entities.

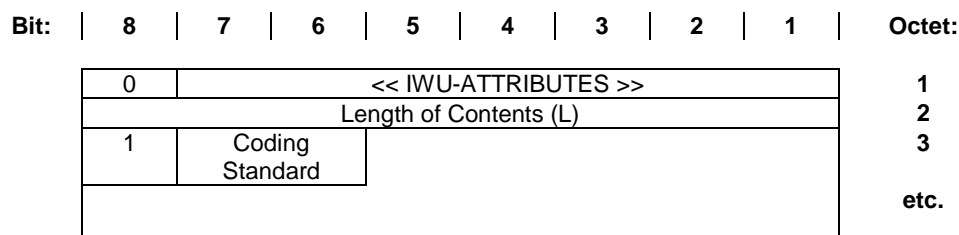


Figure 47: IWU-ATTRIBUTES information element

Coding standard (octet 3):

| Bits | 7 6 | Meaning |
|----------------------------|-----|------------------------|
| 00 | | DECT standard coding |
| 01 | | Profile defined coding |
| All other values reserved. | | |

| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
|------|-----|-----------------------|---|---|--------------------------|--------|---|---|--------|
| | 1 | 0 | 0 | Information Transfer Capability | | | | | 3 |
| | 1 | Negotiation indicator | | | External Connection Type | | | | 4 |
| | 0/1 | Transfer mode | | Information transfer rate | | | | | 5 |
| | 0/1 | Unit rate | | Rate Multiplier | | | | | 5a |
| | 0/1 | Structure | | | Configuration | Estab. | | | 5b |
| | 0/1 | Symmetry | | Information transfer rate (Dest=>Originator) | | | | | 5c |
| | 1 | Unit rate | | Rate Multiplier (Dest=>Originator) | | | | | 5d |
| | 0/1 | 0 | 0 | User protocol ID | | | | | 6 |
| | 0/1 | 1 | 1 | L3 protocol ID | | | | | 6a |
| | 0/1 | 1 | 0 | L2 protocol ID | | | | | 6b |
| | ext | | | | | | | | |

Figure 48: IWU-ATTRIBUTES information element for DECT standard coding

Information transfer capability (octet 3):

| Bits | 5 4 3 2 1 | Meaning |
|------|----------------------------|----------------------------------|
| | 0 0 0 0 0 | Speech |
| | 0 1 0 0 0 | Unrestricted digital information |
| | 0 1 0 0 1 | Restricted digital information |
| | 1 0 0 0 0 | 3,1 kHz audio |
| | 1 0 0 0 1 | 7,0 kHz audio |
| | 1 0 1 0 0 | Fax |
| | 1 1 0 0 0 | Video |
| | All other values reserved. | |

Negotiation indicator (octet 4):

| Bits | 7 6 5 | Meaning |
|------|----------------------------|--|
| | 0 0 0 | Negotiation not possible |
| | 1 0 0 | Exchanged parameter negotiation |
| | 0 1 0 | Peer attribute negotiation |
| | 1 1 0 | Exchanged attribute negotiation and Peer attribute negotiation |
| | All other values reserved. | |

External connection type (octet 4):

| Bits | 4 3 2 1 | Meaning |
|------|----------------------------|-------------------------------|
| | 0 0 0 0 | Not applicable |
| | 0 0 0 1 | Connection oriented |
| | 0 0 1 0 | Permanent Virtual Circuit |
| | 0 0 1 1 | Non-permanent Virtual Circuit |
| | 0 1 0 0 | Datagram |
| | 1 0 0 0 | Connectionless |
| | All other values reserved. | |

Transfer mode (octet 5):

| Bits | 7 6 | Meaning |
|------|----------------------------|----------------------------------|
| | 0 0 | Circuit mode |
| | 1 0 | Packet mode |
| | 1 1 | None (no transfer mode required) |
| | All other values reserved. | |

Information transfer rate (octet 5 and 5c):

| Bits | 5 4 3 2 1 | Meaning |
|------|-----------|----------------------------|
| | 0 0 0 0 0 | Packet mode calls |
| | 0 1 0 1 0 | 16 kbit/s |
| | 0 1 0 1 1 | 32 kbit/s |
| | 1 0 0 0 0 | 64 kbit/s |
| | 1 0 0 0 1 | 2 × 64 kbit/s |
| | 1 0 0 1 1 | 384 kbit/s |
| | 1 1 1 1 0 | Unspecified |
| | 1 1 1 1 1 | Defined by rate multiplier |
| | | All other values reserved. |

NOTE 1: When octet 5c is omitted, the transfer rate is symmetric. When octet 5c is included, the rate in octet 5 refers to the direction Orig=>Dest, and the rate in octet 5c refers to the reverse direction.

If the reserved coding "defined by rate multiplier" is used, then octet 5a shall follow. Octet 5d shall also follow if octet 5c is used (i.e. for asymmetric rates).

Structure (octet 5b):

| Bits | 7 6 5 | Meaning |
|------|-------|----------------------------|
| | 0 0 0 | Default |
| | 0 0 1 | 8 kHz integrity |
| | 1 0 0 | SDU integrity |
| | 1 1 1 | Unstructured |
| | | All other values reserved. |

If octet 5b is omitted, or the structure field is coded "default" the structure attribute shall be defaulted according to the following table:

| Transfer mode | Transfer capability | Structure |
|---------------|----------------------|-----------------|
| circuit | Speech | 8 kHz integrity |
| circuit | Restricted digital | 8 kHz integrity |
| circuit | 3,1 kHz audio | 8 kHz integrity |
| circuit | 7,0 kHz audio | 8 kHz integrity |
| circuit | Fax | 8 kHz integrity |
| circuit | Video | 8 kHz integrity |
| packet | Unrestricted digital | SDU integrity |

Configuration (octet 5b):

| Bits | 4 3 | Meaning |
|------|-----|----------------------------|
| | 0 0 | Point-to-point |
| | | All other values reserved. |

Establishment (octet 5b):

| Bits | 2 1 | Meaning |
|------|-----|----------------------------|
| | 0 0 | Demand |
| | | All other values reserved. |

Unit rate (octet 5a and 5d):

| Bits | 7 6 | Meaning |
|------|-----|----------------------------|
| | 0 1 | 16 kbit/s steps |
| | 1 0 | 32 kbit/s steps |
| | 1 1 | 64 kbit/s steps |
| | | All other values reserved. |

Rate multiplier (octet 5a and 5d):

| Bits | 5 4 3 2 1 | Meaning |
|------|-----------|----------------------------|
| | 0 n n n n | Number of steps |
| | | All other values reserved. |

NOTE 2: The number of steps (nnnn) relates to the unit rate defined in the same octet. The value is coded with the natural binary value, with the least significant bit in bit position "1". Allowable values for "number of steps" are "1" to "15".

Symmetry (octet 5c):

| Bits | 7 6 | Meaning |
|------|-----|----------------------------|
| | 0 0 | Bidirectional symmetric |
| | 1 0 | Unidirectional asymmetric |
| | 1 1 | Bidirectional asymmetric |
| | | All other values reserved. |

All of the user protocol identifier (octets 6, 6a, 6b) are optional, but if present they shall appear in order shown. The meaning of each octet is identified by the coding of bits 7 and 6.

Protocol identifier coding (octets 6, 6a, 6b):

| Bits | 7 6 | Meaning |
|------|-----|-------------------------------|
| | 0 0 | User protocol IDentifier (ID) |
| | 1 1 | L3 protocol ID |
| | 1 0 | L2 protocol ID |
| | | All other values reserved. |

User protocol ID (octet 6):

| Bits | 5 4 3 2 1 | Meaning |
|------|-----------|---|
| | 0 0 0 0 0 | User specific (escape) |
| | 0 0 0 0 1 | ITU-T Recommendations V.110 [58]/X.30 [60] rate adaption (see note 6) |
| | 0 0 0 1 0 | G.711 μ -law PCM |
| | 0 0 0 1 1 | G.711 A-law PCM |
| | 0 0 1 0 0 | G.721 ADPCM |
| | 0 0 1 0 1 | H.221 and H.242 |
| | 0 0 1 1 0 | H.261 Video |
| | 0 0 1 1 1 | Non-standard rate adaption |
| | 0 1 0 0 0 | V.120 [59] rate adaption |
| | 0 1 0 0 1 | X.31 rate adaption |
| | 1 0 0 0 0 | Group 3 fax |
| | 1 0 0 0 1 | Group 4 fax |
| | 1 1 0 0 0 | X.28/X.29 |
| | | All other values reserved. |

NOTE 3: If octet 6 indicates "V.110 [58]/X.30 [60] rate adaption", the setup message is also required to contain the <<END-TO-END-COMPATIBILITY>> element to define the attributes of the rate adaption service.

L3 protocol ID (octet 6a):

| Bits | 5 4 3 2 1 | Meaning |
|------|-----------|---|
| | 0 0 0 0 0 | User specific (escape) |
| | 0 0 0 1 0 | EN 300 403-1 [8] |
| | 0 0 1 1 0 | ITU-T Recommendation X.25 [46] packet layer |
| | 0 0 1 1 1 | ISO/IEC 8208 [20] (ITU-T Recommendation X.25 [46] packet level for DTE) |
| | 0 1 0 0 0 | ISO/IEC 8348 [21] (OSI C/O protocol) |
| | 0 1 0 0 1 | ISO/IEC 8473 [22] (OSI C/L service) |
| | 0 1 0 1 0 | ITU-T Recommendation T.70 [47], minimum network layer |
| | 1 0 0 1 0 | GSM TS 144 018 [9] |
| | 1 0 0 1 1 | UMTS TS 124 008 [65] |
| | | All other values reserved. |

L2 protocol ID (octet 6b):

| Bits | 5 4 3 2 1 | Meaning |
|------|-----------|---|
| | 0 0 0 0 0 | User specific (escape) |
| | 0 0 0 0 1 | Basic mode ISO/IEC 1745 [48] |
| | 0 0 0 1 0 | ITU-T Recommendation Q.921/I.441 (LAP.D)/ETS 300 125 [17] |
| | 0 0 1 1 0 | ITU-T Recommendation X.25 [46]; link layer (LAP.B) |
| | 0 0 1 1 1 | ITU-T Recommendation X.25 [46] multilink |
| | 0 1 0 0 0 | Extended LAP.BN ITU-T Recommendation T.71 [18] |
| | 0 1 1 0 0 | ISO/IEC 8802-2 [19] (LAN LLC) |
| | 1 0 0 0 1 | ISO/IEC 8802-2 [19] (see note 7) |
| | 1 0 0 1 0 | GSM TS 144 006 [45] |
| | 1 0 0 1 1 | TS 124 008 [65] |
| | 1 0 1 1 0 | ITU-T Recommendation V.42 (LAP.M) [71] |

All other values reserved.

NOTE 4: ISO/IEC 8802-2 [19] refers to LAN operation with a null layer 2 protocol (LLC not implemented).

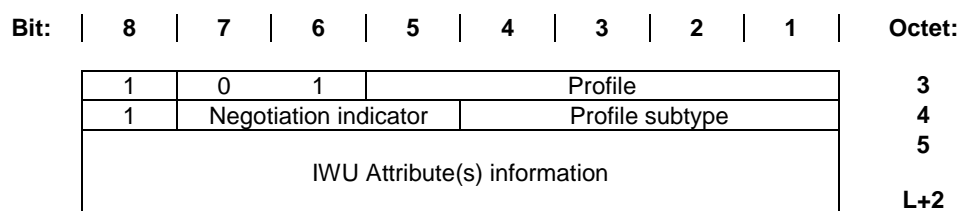


Figure 49: IWU-ATTRIBUTES information element for Profile defined coding standard

Profile (octet 3):

| Bits | 5 4 3 2 1 | Meaning |
|------|-----------|--|
| | 0 0 0 0 0 | DPRS FREL |
| | 0 0 0 0 1 | DPRS Stream |
| | 0 0 0 1 0 | D data profile |
| | 0 0 0 1 1 | LRMS (E-profile) service (EN 300 757 [50]) |
| | 0 0 1 0 0 | F data profile (historical) |
| | 0 1 0 0 0 | GSM circuit mode NT |
| | 0 1 0 0 1 | GSM circuit mode T |
| | 0 1 0 1 0 | GSM packet mode |
| | 0 1 0 1 1 | GSM messaging |
| | 0 1 1 0 0 | GSM Facsimile service group 3 |
| | 0 1 1 0 1 | CTM FP1 32 kbit/s |
| | 0 1 1 1 0 | DMAP |
| | 0 1 1 1 1 | MRAP |

All other values reserved.

Negotiation indicator (octet 4):

| Bits | 7 6 5 | Meaning |
|------|-------|--|
| | 0 0 0 | Negotiation not possible |
| | 1 0 0 | Exchanged parameter negotiation |
| | 0 1 0 | Peer attribute negotiation |
| | 1 1 0 | Exchanged attribute negotiation and Peer attribute negotiation |

All other values reserved.

Profile subtype (octet 4):**Bits 4 3 2 1 Meaning**

The coding of the profile subtype is given in the interworking annexes for the services where they are used as indicated in the profile type identifier (octet 3) above.

IWU attribute(s) information (octets 4 to L+2):

The coding of the IWU attributes is given in the interworking annexes for the services where they are used as indicated in the IWU type identifier (octet 3) above.

7.7.22 IWU packet

The purpose of the <<IWU-PACKET>> information element is to encapsulate any external frame or unstructured data such that it can be transported inside one or more CC, MM, COMS or CLMS messages.

This element may be used to encapsulate octet structured frames (e.g. frames that have an original octet structure or have had all zero insertions and flag octets removed). If the frame (or data) is too large to fit into a single <<IWU-PACKET>> element, it shall be segmented into a series of <<IWU-PACKET>> elements that are associated using the <<SEGMENTED-INFO>> element.

Refer to annex G for more details on the use of this element.

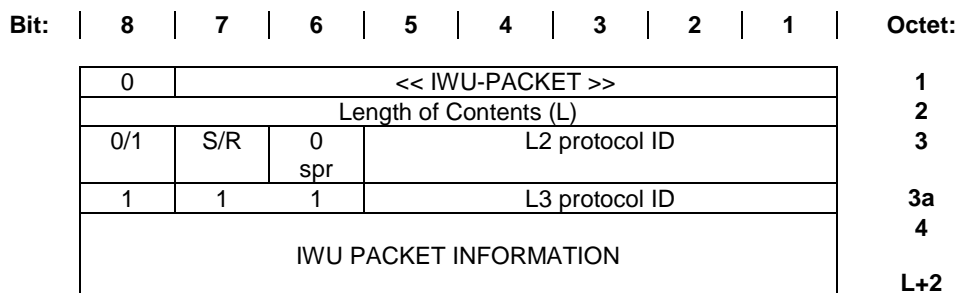


Figure 50: IWU-PACKET information element

Send/Reject (S/R) bit (octet 3):

| Bit | 7 | Meaning |
|-----|---|-------------------------|
| | 0 | Rejection of message |
| | 1 | Transmission of message |

NOTE 1: This send/reject bit is used to distinguish between the sending of a new messages (e.g. sent in the direction A=>B) and the rejection of a received message (e.g. message received by B can be rejected by sending "reject" code in direction B=>A).

L2 protocol ID coding (octet 3):

| Bits | 5 4 3 2 1 | Meaning |
|------|----------------------------|---|
| | 0 0 0 0 0 | User Specific (see note 4) |
| | 0 0 0 0 1 | Basic mode ISO/IEC 1745 [48] |
| | 0 0 0 1 0 | ITU-T Recommendation Q.921/I.441 (LAP.D)/ETS 300 125 [17] |
| | 0 0 1 1 0 | ITU-T Recommendation X.25 [46] link layer (LAP.B) |
| | 0 0 1 1 1 | ITU-T Recommendation X.25 [46] multilink |
| | 0 1 0 0 0 | Extended LAP.B |
| | 0 1 0 0 1 | IPv4 (Internet Protocol version 4) RFC 791 [67] |
| | 0 1 0 1 0 | IPv6 (Internet Protocol version 6) RFC 2460 [69] |
| | 0 1 0 1 1 | PPP (Point-to-Point Protocol) RFC 1661 [68] |
| | 0 1 1 0 0 | ISO/IEC 8802-2 [19] (LAN LLC) |
| | 1 0 0 0 1 | ISO/IEC 8802-2 [19] (see note 3) |
| | 1 0 0 1 0 | GSM TS 144 006 [45] |
| | 1 0 1 1 0 | ITU-T Recommendation V.42 (LAP.M) [71] |
| | All other values reserved. | |

L3 protocol ID coding (octet 3a):

| Bits | 5 | 4 | 3 | 2 | 1 | Meaning |
|------|---|---|---|---|---|--|
| 0 | 0 | 0 | 0 | 0 | 0 | User specific (see note 4) |
| 0 | 0 | 0 | 1 | 0 | | EN 300 403-1 [8] |
| 0 | 0 | 1 | 1 | 0 | | ITU-T Recommendation X.25 [46], packet layer |
| 0 | 0 | 1 | 1 | 1 | | ISO/IEC 8208 [20] (X.25 [46] packet level for DTE) |
| 0 | 1 | 0 | 0 | 0 | | ISO/IEC 8348 [21] (OSI C/O protocol) |
| 0 | 1 | 0 | 0 | 1 | | ISO/IEC 8473 [22] (OSI C/L service) |
| 0 | 1 | 0 | 1 | 0 | | ITU-T Recommendation T.70 [47] (minimum NWK layer) |
| 1 | 0 | 0 | 1 | 0 | | GSM TS 144 018 [9] |

All other values reserved.

NOTE 2: All the L2 protocol ID and L3 protocol ID codings are the same as the codings used for "DECT Standard coding" in the <<IWU-ATTRIBUTES>> element. See clause 7.7.21.

NOTE 3: ISO/IEC 8802-2 [19] refers to LAN operation with a null layer 2 protocol (LLC not implemented).

NOTE 4: The <<IWU-PACKET>> is structured according to the user needs.

7.7.23 IWU to IWU

The purpose of the <<IWU-TO-IWU>> element is to encapsulate any message or information element that cannot be interworked into one or more other DECT information element(s) or to exchange DECT Profile specific information between the peer interworking units.

If the message or element is too large to fit into a single <<IWU-TO-IWU>> element, it shall be segmented into a series of <<IWU-TO-IWU>> elements that are associated using the <<SEGMENTED-INFO>> element.

Refer to annex G for more details on the use of this element.

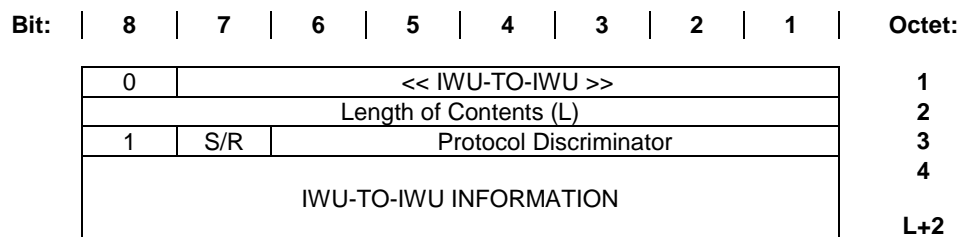


Figure 51: IWU-TO-IWU information element

Send/Reject (S/R) bit:

| Bits | 7 | Meaning |
|------|---|-------------------------|
| 0 | | Rejection of message |
| 1 | | Transmission of message |

NOTE 1: This Send/Reject (S/R) bit is used to distinguish between the sending of a new message (e.g. sent in the direction A=>B) and the rejection of a received message (e.g. message received by B can be rejected by sending "reject" code in direction B=>A).

Protocol Discriminator (PD):

| Bits | 6 5 4 3 2 1 | Meaning |
|-------------|--------------------|---|
| 0 0 0 0 0 0 | | User Specific (see note 2) |
| 0 0 0 0 0 1 | | OSI high layer protocols |
| 0 0 0 0 1 0 | | ITU-T Recommendation X.263 [23] (see note 3) |
| 0 0 0 1 0 0 | | IA5 characters |
| 0 0 0 1 1 1 | | ITU-T Recommendation V.120 [59] Rate adaption |
| 0 0 1 0 0 0 | | ITU-T Recommendation Q.931 (I.451), message |
| 0 0 1 0 0 1 | | ITU-T Recommendation Q.931 (I.451), information element(s) (see note 4) |
| 0 0 1 0 1 0 | | ITU-T Recommendation Q.931 (I.451), partial message. (see note 5) |
| 0 1 0 0 0 0 | | GSM, message/TS 144 018 [9] |
| 0 1 0 0 0 1 | | GSM, information element(s)/TS 144 018 [9] (see note 4) |
| 0 1 0 0 1 0 | | UMTS/GPRS information element(s) (note 4)/TS 124 008 [65] |
| 0 1 0 0 1 1 | | UMTS/GPRS, messages/TS 124 008 [65] |
| 0 1 0 1 0 0 | | LRMS (EN 300 757 [50]) |
| 0 1 0 1 0 1 | | RLL Access Profile (RLL access profile, EN 300 765-1 [52]) |
| 0 1 0 1 1 0 | | WRS (EN 300 700 [66]) |
| 1 0 0 0 0 0 | | DECT/ISDN Intermediate System C-plane specific |
| 1 0 0 0 0 1 | | DECT/ISDN Intermediate System U-plane specific |
| 1 0 0 0 1 0 | | DECT/ISDN Intermediate System Operation and Maintenance |
| 1 0 0 0 1 1 | | Terminal Data (see note 6) |
| 1 0 0 1 0 0 | | DECT access to IP Networks specific, TS 102 265 [72] |
| 1 1 1 1 1 1 | | Unknown |

All other values reserved.

NOTE 2: The IWU information is structured as shown in figure 52.

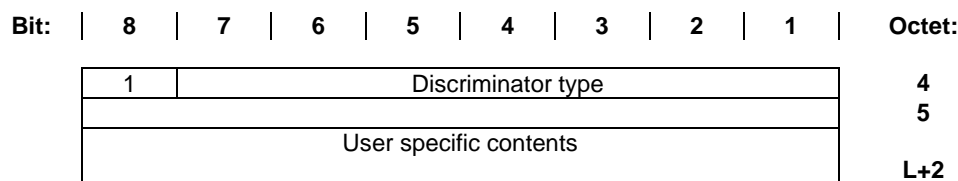
IWU-to-IWU information field (octets 4 to L+2) for Protocol Discriminator value "user specific".

Figure 52

NOTE 3: The IWU information is structured according to ITU-T Recommendation X.263 [23] (ITU-T Recommendation X.25 [46] call user data).

NOTE 4: If more than one element is included, they are interpreted in the order of appearance.

NOTE 5: The ITU-T Recommendation Q.931 (I.451) partial message excludes the protocol discriminator and the call reference.

NOTE 6: If the protocol discriminator indicates the value "Terminal data" for the content of the information element see annex I.

Discriminator type (octet 4):

| Bits | 7 6 5 4 3 2 1 | Meaning |
|---------------|----------------------|----------------|
| 0 0 0 0 0 0 0 | | Unspecified |
| 0 0 0 0 0 0 1 | | EMC |

All other values reserved.

User specific contents field (octets 5 to L+2) for Discriminator type "EMC"

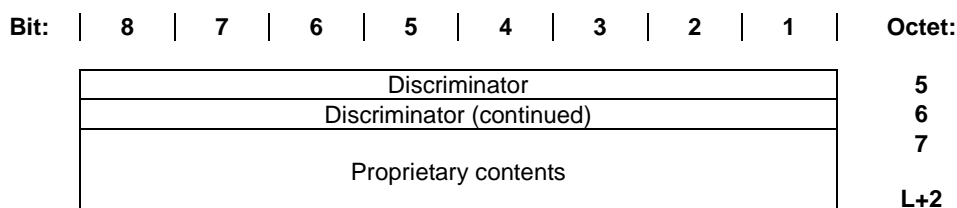


Figure 53

The discriminator consists of 2 octets (octets 5 and 6) and contains the EMC.

7.7.24 Key

The purpose of the <<KEY>> information element is to transfer a key. When sending the <<KEY>> information element a ciphered connection shall be used.

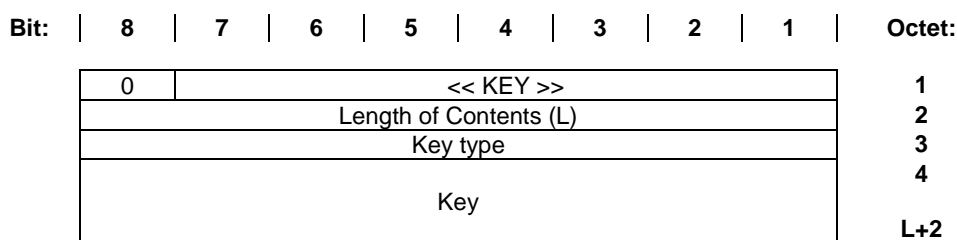


Figure 54: KEY information element

Key type coding (octet 3):

Bits 8 7 6 5 4 3 2 1 **Meaning**
 1 0 0 1 0 0 0 0 Derived Cipher Key (DCK)
 All other values reserved.

Key data field: the key data field contains the numeric value of the key. The length of the key data field is (L-1) octets as defined by the length indicator (octet 2). For a multi-octet field, the order of bit values progressively decreases as the octet number increases.

NOTE: A key K1 with $L1 > N$ bits can be mapped into a key K with N bits by taking the lower N bits of K1. A key K2 with $L2 < N$ bits can be mapped into a key K with N bits by using: $K(i) = K2(i \text{ modulo } L2)$, $0 \leq i \leq N-1$.

7.7.25 Location area

The purpose of the <<LOCATION-AREA>> information element is to provide an identification of the location area.

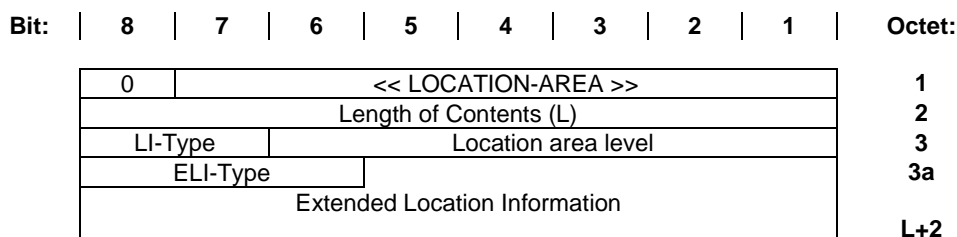


Figure 55: LOCATION-AREA information element

Location Information (LI) type coding (octet 3):

| Bits | 8 7 | Meaning |
|------|-----|--|
| | 0 0 | Reserved |
| | 0 1 | Location area level is included (octet 3) but no extended location information is included |
| | 1 0 | Only extended location information (octet 3a to octet L+2) is included the value of the location area level (octet 3) is not a valid one |
| | 1 1 | Location area level (octet 3) as well as extended location information (octet 3a to octet L+2) are included |

Location area level for LA type 01 and 11 (octet 3):

Contains a number which identifies how many bits of the PARI + RPN are relevant for this location area. The bit count starts with the MSB of the PARI + RPN.

Extended Location Information (ELI) type coding (octet 3a):

| Bits | 8 7 6 5 | Meaning |
|------|---------|--|
| | 0 1 1 1 | Location information is requested and not included; bits 1 to 4 of octet 3a should be set to 1 |
| | 1 1 1 1 | Location information |
| | | All other values reserved. |

Location information coding:

| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
|------|-----------------|---|---|---|-------------|---|---|---|--------|
| | MCC digit 2 | | | | MCC digit 1 | | | | 4 |
| | 1 | 1 | 1 | 1 | MCC digit 3 | | | | 5 |
| | MNC digit 2 | | | | MNC digit 1 | | | | 6 |
| | LAC | | | | | | | | 7 |
| | LAC (continued) | | | | | | | | 8 |
| | CI | | | | | | | | 9 |
| | CI (continued) | | | | | | | | 10 |

MCC: Mobile Country Code;
MNC: Mobile Network Code;
LAC: Location Area Code;
CI: Cell Identity.

Figure 56

NOTE: The Cell Identity (CI) is needed for external handover.

7.7.26 Multi-display

The purpose of the <<MULTI-DISPLAY>> element is to supply a list of display information that may be displayed by the PT. Multi-display elements shall only contain DECT standard characters. Multiple characters shall be interpreted in the order of ascending octet numbers.

| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
|------|--|---------------------|---|---|---|---|---|---|--------|
| | 0 | << MULTI-DISPLAY >> | | | | | | | 1 |
| | Length of Contents (L) | | | | | | | | 2 |
| | List of Display Information (DECT characters) | | | | | | | | 3 |
| | | | | | | | | | L+2 |

Figure 57: MULTI-DISPLAY information element

NOTE: DECT characters are specified in annex D. These are closely based on IA5 characters.

7.7.27 Multi-keypad

The purpose of the <<MULTI-KEYPAD>> element is to transport a list of keypad information e.g. entered by a PT keypad. Multi-keypad elements shall only contain DECT standard characters. Multiple characters shall be interpreted in the order of ascending octet numbers.

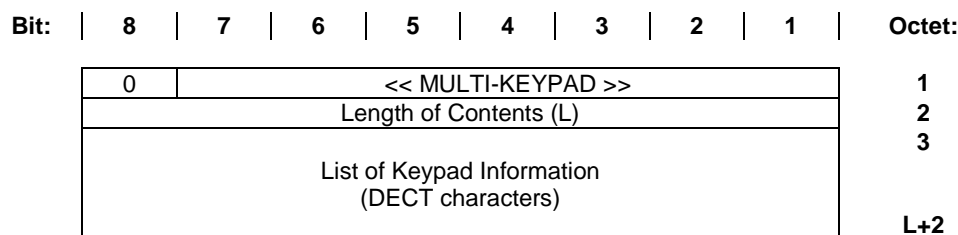


Figure 58: MULTI-KEYPAD information element

NOTE: DECT characters are specified in annex D. These are closely based on IA5 characters.

7.7.28 NetWork (NWK) assigned identity

The purpose of the <<NWK-ASSIGNED-IDENTITY>> information element is to transport a network assigned identity.

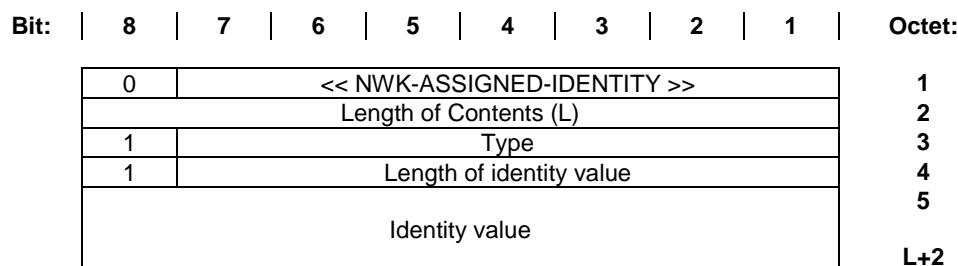


Figure 59: NWK-ASSIGNED-IDENTITY information element

Type coding (octet 3):

Bits 7 6 5 4 3 2 1 Meaning

1 1 1 0 1 0 0 Temporary Mobile Subscriber Identity (TMSI, P-TMSI)

1 1 1 1 1 1 1 Proprietary (application specific)

All other values reserved.

Length of identity value coding (octet 4): the length is defined in bits, and this is coded with the natural binary value. The least significant bit of the coding appears in bit position 1. Allowable values: 0 to 127.

Identity value coding for TMSI:

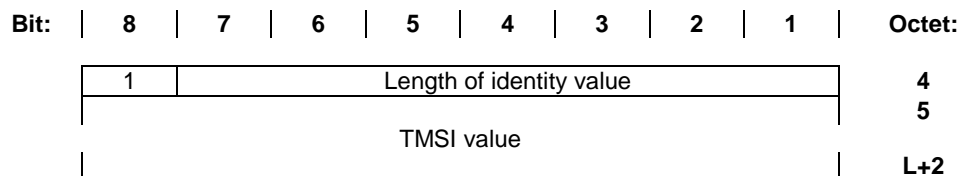



Figure 60

Length of identity value coding (octet 4): the length is defined in bits, and this is coded with the natural binary value. The least significant bit of the coding appears in bit position 1. Allowable values: 0 to 32.

TMSI value coding (octet 5 to L+2): the TMSI value shall not have more than 4 octets.

7.7.29 Network parameter

The purpose of the <<NETWORK-PARAMETER>> element is to carry network parameters.

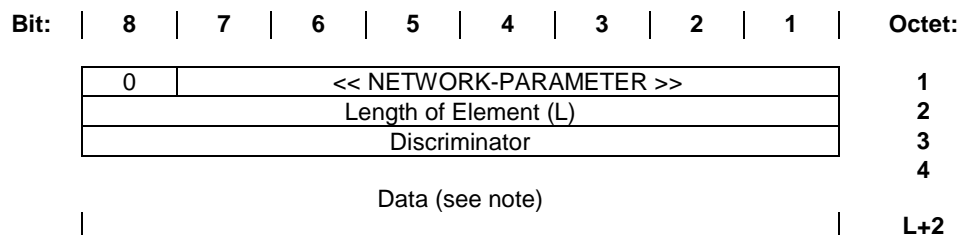

NOTE: The <data> field is not structured because information is passed transparently.

Figure 61a: NETWORK PARAMETER information element

Discriminator coding (octet 3):

| Bits | 8 7 6 5 4 3 2 1 | Meaning |
|------|----------------------------|--|
| | 0 0 0 0 1 0 0 0 | Application assigned |
| | 0 1 1 0 1 0 0 0 | Handover reference not required |
| | 0 1 1 0 1 0 0 1 | Handover reference, private network |
| | 0 1 1 0 1 0 1 0 | Handover reference, GSM network |
| | 0 1 1 0 1 0 1 1 | Handover reference, public network |
| | 0 1 1 1 1 1 1 1 | Proprietary |
| | 1 1 1 0 1 0 1 0 | Handover reference request, GSM network |
| | 1 1 1 0 1 0 1 1 | Handover reference, UMTS network |
| | 1 1 1 0 1 1 0 0 | Handover reference request, UMTS network |
| | All other values reserved. | |

Data field coding for handover reference (octet 4):

The handover reference is coded using binary representation.

Data field coding for Application assigned (octet 4+):

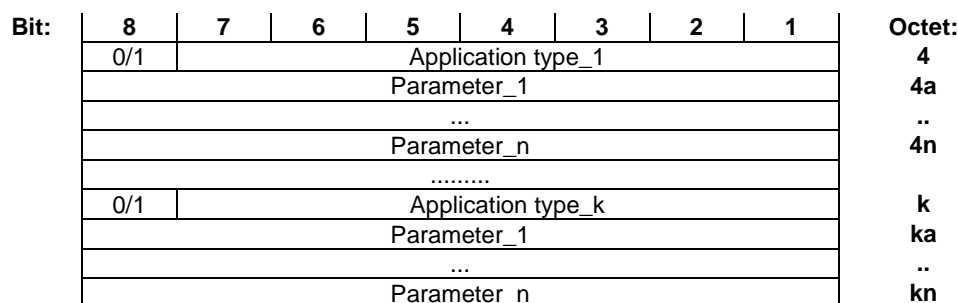


Figure 61b

A number of octet groups related to different applications may be included where each group should be defined as follows. The extension bit should be used to indicate whether more than one octet group is included following the DECT rules.

Application type (octet group 4):

| Bits | 7 6 5 4 3 2 1 | Meaning |
|------|----------------------------|---|
| | 0 1 1 0 0 0 0 | Ethernet (IEEE 802.3) Address |
| | 0 1 1 0 0 0 1 | Token Ring Address |
| | 0 1 1 0 0 1 0 | Internet Protocol Version 4 Address (IPv4), RFC 791 [67] |
| | 0 1 1 0 0 1 1 | Internet Protocol Version 6 Address (IPv6), RFC 2460 [69] |
| | All other values reserved. | |

Each parameter has structure and is coded as follows:

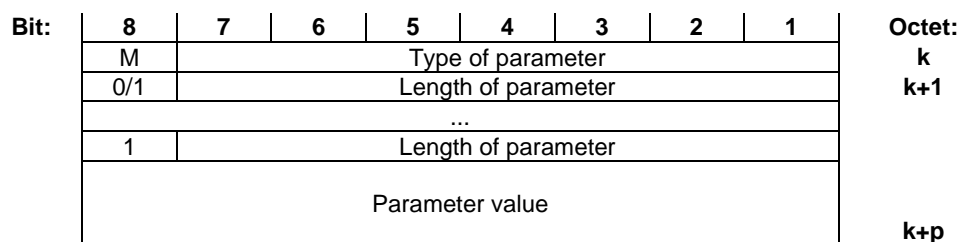


Figure 61c: Parameters fields' general structure

Type of parameter (octet k):

| | | |
|-------------|----------------------|-----------------|
| Bits | 7 6 5 4 3 2 1 | Meaning |
| | 0 0 0 0 0 0 1 | Address |
| | 0 0 0 0 0 1 0 | Other parameter |

All other values reserved.

M bit (octet k):

| | | |
|-------------|----------|--------------------|
| Bits | 8 | Meaning |
| | 0 | No more parameters |
| | 1 | More parameters |

Length of parameter (octet k+1 ...): the length is defined in bits, and this is coded with the natural binary value. The least significant bit of the coding appears in bit position 1 of the last octet containing the length. Multiple octets comprising the length are identified by the setting of the extension bit.

Parameter value coding: The Parameter value is provided in format according to the format defined in the relevant standard specifying the relevant application.

7.7.30 Portable identity

The purpose of the <<PORTABLE-IDENTITY>> information element is to transport a DECT portable identity. Refer to EN 300 175-6 [5], describing identities and addressing.

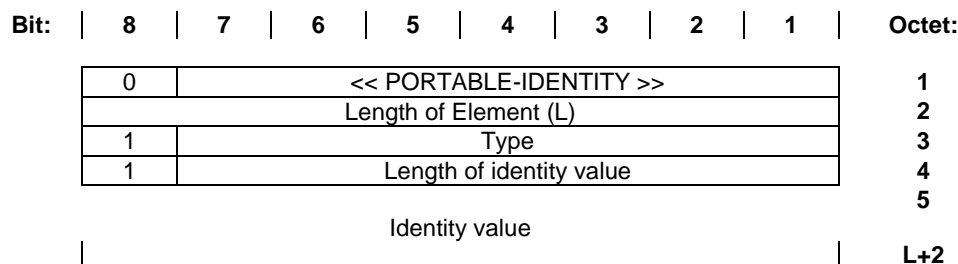



Figure 62: PORTABLE-IDENTITY information element

Identity type coding for portable identities (octet 3):

| | | |
|-------------|----------------------------|--|
| Bits | 7 6 5 4 3 2 1 | Meaning |
| | 0 0 0 0 0 0 0 | International Portable User Identity (IPUI) |
| | 0 0 1 0 0 0 0 | International Portable Equipment Identity (IPEI) |
| | 0 1 0 0 0 0 0 | Temporary Portable User Identity (TPUI) |
| | All other values reserved. | |

Length of identity value coding (octet 4): the length is defined in bits, and this is coded with the natural binary value. The least significant bit of the coding appears in bit position 1.


Allowable values: 0 to 127.

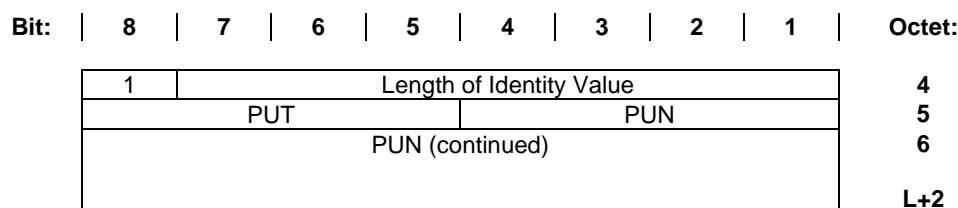Identity value coding for IPUIs:**Figure 63**

Length of identity value coding (octet 4): defines the number of valid IPUI bits.


Portable User Type (PUT) coding (octet 5): refer to EN 300 175-6 [5]. The most significant bit is in bit position 8 in octet 5.

Portable User Number (PUN) coding (octet 5 to L+2): refer to EN 300 175-6 [5]. The Most Significant Bit (MSB) is in bit position 4 in octet 5. For binary codings: the order of bit values progressively decreases as the octet number increases, and unused bits in the last octet shall be set to 0.

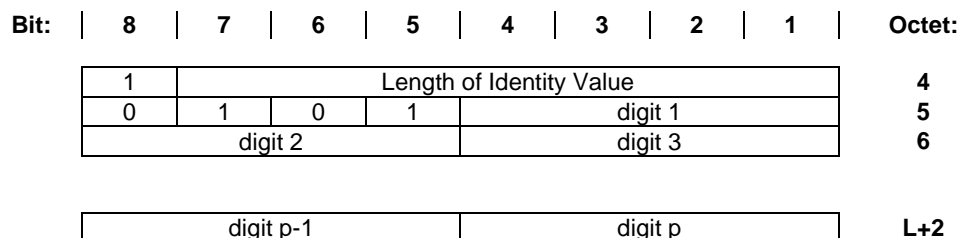Identity value coding for IPUI S containing the PSTN or ISDN number:**Figure 64**


Length of identity value coding (octet 4): defines the number of valid IPUI bits. The value equals to $4 + 4^x p$.

PSTN or ISDN number coding (octet 5 to L+2): the number is BCD coded and shall not exceed 15 digits. If the number of identity digits is even then bits 1 to 4 of the last octet shall be coded as "1111".

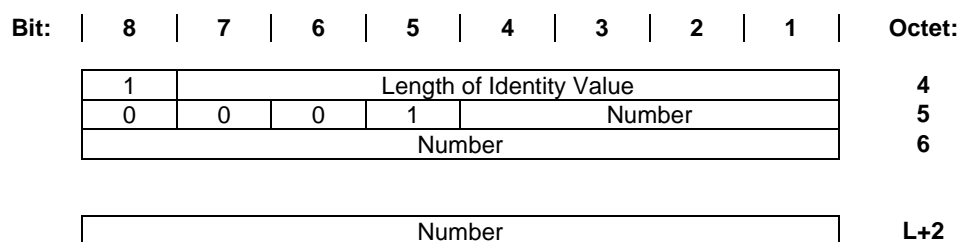Identity value coding for IPUI O containing the private number:**Figure 65**

Length of identity value coding (octet 4): defines the number of valid IPUI bits. The value equals $4 + (0 \text{ to } 60)$.


Private number coding number (octet 5 to L+2): the number is binary coded and shall not exceed 60 bits. The order of bit values progressively decreases as the octet number increases, and unused bits in the last octet shall be set to 0.

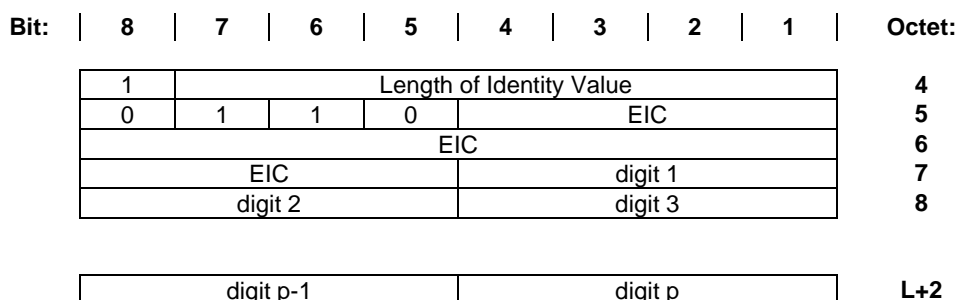Identity value coding for IPUI T containing the equipment installer's code and private extended number:**Figure 66**

Length of identity value coding (octet 4): defines the number of valid IPUI bits. The value equals to $20 + 4^x p$.

Equipment Installer's Code (EIC) (octet 5 to 7): the EIC is binary coded and is 16 bits.


Private extended number coding (octet 7 to L+2): the number is BCD coded and shall not exceed 11 digits. If the number of identity digits is even then bits 1 to 4 of the last octet shall be coded as "1111".

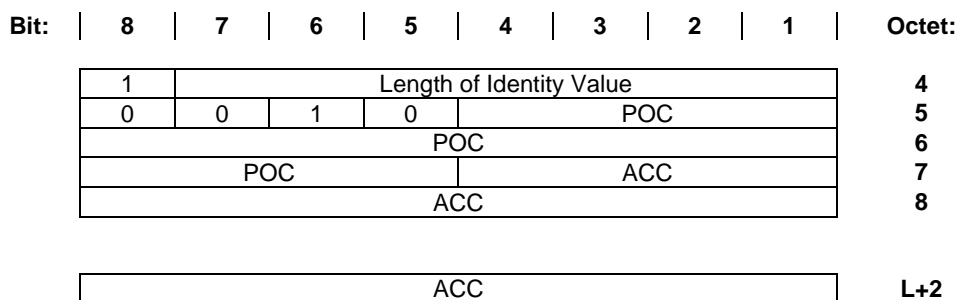Identity value coding for IPUI P containing the public operator code and the account number:**Figure 67**

Length of identity value coding (octet 4): defines the number of valid IPUI bits. The value equals to $20 + (0 \text{ to } 80)$.


Public Operator Code (POC) (octet 5 to 7): the code is binary coded and is 16 bits.

ACCcount number (ACC) coding (octet 7 to L+2): the number is binary coded and shall not exceed 80 bits. The order of bit values progressively decreases as the octet number increases, and unused bits in the last octet shall be set to 0.

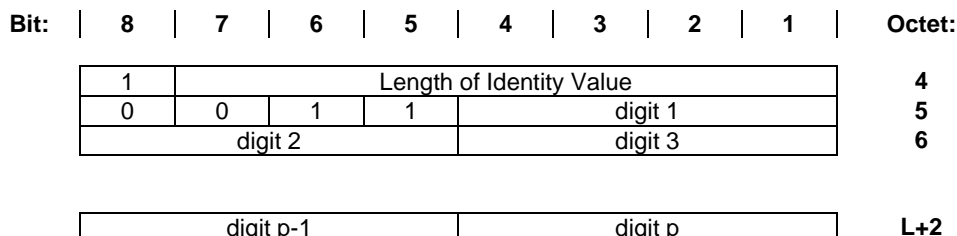Identity value coding for IPUI Q containing the bank account number:**Figure 68**


Length of identity value coding (octet 4): defines the number of valid IPUI bits. The value equals to $4 + 4^x p$.

Bank ACCount Number (BACN) coding (octet 5 to L+2): the number is BCD coded and shall not exceed 20 digits. If the number of identity digits is even then bits 1 to 4 of the last octet shall be coded as "1111".

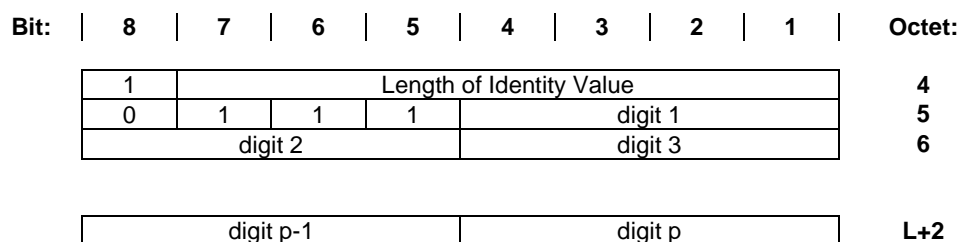Identity value coding for IPUI U containing the credit card account number:**Figure 69**


Length of identity value coding (octet 4): defines the number of valid IPUI bits. The value equals to $4 + 4^x p$.

Credit Card Account Number (CACN) coding (octet 5 to L+2): the number is BCD coded and shall not exceed 20 digits. If the number of identity digits is even then bits 1 to 4 of the last octet shall be coded as "1111".

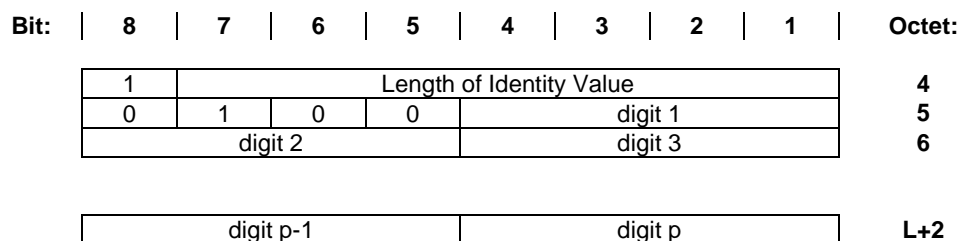Identity value coding for IPUI R containing the IMSI:**Figure 70**

Length of identity value coding (octet 4): defines the number of valid IPUI bits. The value equals to $4 + 4^x p$.

International Mobile Subscriber Identity (IMSI) coding (octet 5 to L+2): the number is BCD coded and shall not exceed 15 digits. If the number of identity digits is even then bits 1 to 4 of the last octet shall be coded as "1111".

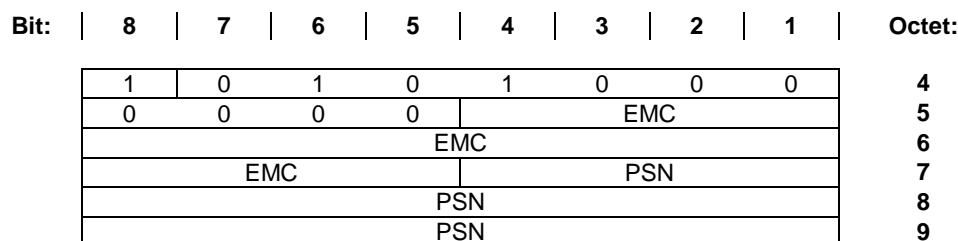Identity value coding for the IPEI (same as for IPUI N):**Figure 71**

Length of identity value coding (octet 4): the number of valid bits for IPUI N containing the IPEI is 40.

Equipment Manufacturer Code (EMC) coding (octets 5 to 7): refer to EN 300 175-6 [5]. The Most Significant Bit (MSB) is in bit position 4 in octet 5. The order of bit values progressively decreases as the octet number increases.

Portable Equipment Serial Number (PSN) coding (octets 7 to 9): refer to EN 300 175-6 [5]. The most significant bit is in bit position 4 in octet 7. The order of bit values progressively decreases as the octet number increases.

Identity value coding for TPUI:

| | | | | | | | | | |
|-------------|------------|----------|----------|----------|------------|----------|----------|----------|---------------|
| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
| | 1 | 0 | 0 | 1 | 0 | 1 | 0 | 0 | 4 |
| | 0 | 0 | 0 | 0 | TPUI value | | | | 5 |
| | TPUI value | | | | | | | | 6 |
| | TPUI value | | | | | | | | 7 |

Figure 72

Length of identity value coding (octet 4): the number of valid bits for a TPUI is 20.

Temporary Portable User Identity (TPUI) coding (octet 5 to 7): Refer to EN 300 175-6 [5]. The most significant bit is in bit position 4 in octet 5. The order of bit values progressively decreases as the octet number increases.

7.7.31 Progress indicator

The purpose of the <<PROGRESS-INDICATOR>> element is to describe an event which has occurred during the life of a call.

| | | | | | | | | | | |
|-------------|------------------------|--------------------------|----------|----------|----------|----------|----------|----------|---------------|----------|
| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: | |
| | 0 | << PROGRESS-INDICATOR >> | | | | | | | 1 | |
| | Length of Contents (L) | | | | | | | | 2 | |
| | 1 | Coding standard | 0 | Location | | | | | | 3 |
| | 1 | Progress description | | | | | | | | 4 |

Figure 73: PROGRESS-INDICATOR information element**Coding standard coding (octet 3):**

| Bits | 7 6 | Meaning |
|-------------|------------|---|
| | 0 0 | ITU-T standardized coding, as described below |
| | 0 1 | reserved for other international standards |
| | 1 0 | national standard |
| | 1 1 | standard specific to identified location |

Location coding (octet 3):

| Bits | 4 3 2 1 | Meaning |
|-------------|----------------|---|
| | 0 0 0 0 | user |
| | 0 0 0 1 | private network serving the local user |
| | 0 0 1 0 | public network serving the local user |
| | 0 1 0 0 | public network serving the remote user |
| | 0 1 0 1 | private network serving the remote user |
| | 0 1 1 1 | international network |
| | 1 0 1 0 | network beyond interworking point |
| | 1 1 1 1 | not applicable |

All other values are reserved.

Progress description coding (octet 4):

| Bits | 7 6 5 4 3 2 1 | Meaning |
|-------------|----------------------|--|
| | 0 0 0 0 0 0 1 | Call is not end-to-end ISDN, further call progress info may be available in-band |
| | 0 0 0 0 0 1 0 | Destination address is non-ISDN |
| | 0 0 0 0 0 1 1 | Origination address is non-ISDN |
| | 0 0 0 0 1 0 0 | Call has returned to the ISDN |
| | 0 0 0 0 1 0 1 | Service change has occurred |
| | 0 0 0 1 0 0 0 | In-band information or appropriate pattern now available |
| | 0 0 0 1 0 0 1 | In-band information not available |
| | 0 1 0 0 0 0 0 | Call is end-to-end PLMN/ISDN |

All other values reserved.

7.7.32 RAND

The purpose of the authentication parameter <<RAND>> information element is to provide a non predictable number to be used to calculate the authentication response signature.

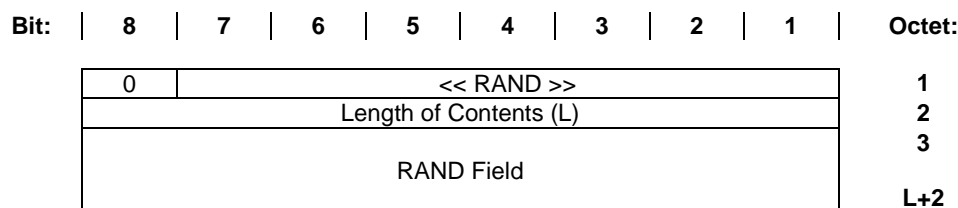


Figure 74: RAND information element

NOTE: This information element is used for either the RAND-P or the RAND-F information. The actual contents are determined by the direction of transmission.

RAND field coding (octet 3 to L+2)

RAND shall be coded with the natural binary value with the least significant bit in position 1 of octet L+2. For a multi-octet field, the order of bit values progressively decreases as the octet number increases.

7.7.33 Rate parameters

The purpose of the <<RATE-PARAMETERS>> element is to indicate the requested attributes for the Basic Rate Adaption Service (BRAT).

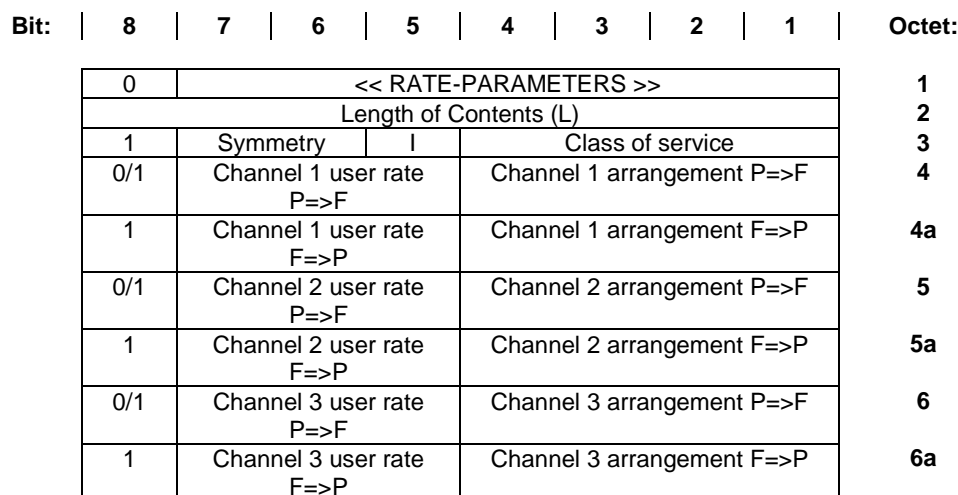


Figure 75: RATE-PARAMETERS information element

Symmetry (octet 3):

| | | |
|-------------|----------------------------|----------------|
| Bits | 7 6 | Meaning |
| | 0 0 | Symmetric |
| | 1 0 | Asymmetric |
| | All other values reserved. | |

If symmetric, only octets 4, 5 and 6 shall appear and the rates shall apply to both directions. If asymmetric octets 4, 5 and 6 shall refer to the direction P=>F; and octets 4a, 5a and 6a shall refer to the direction F=>P.

If octets 5 or 6 is omitted the channel 2 rate and/or channel 3 rate shall be understood to be 0 kbit/s.

Interleaving (I) (octet 3):

| Bits | 5 | Meaning |
|------|---|-----------------|
| | 0 | Non-interleaved |
| | 1 | Interleaved |

Class of service (octet 3):

| Bits | 4 3 2 1 | Meaning |
|------|---------|---|
| | 0 0 0 0 | I _N service |
| | 0 0 1 0 | I _P ; Class 0 service |
| | 0 1 0 0 | I _P ; Class 3 service; 0 % excess capacity |
| | 0 1 0 1 | I _P ; Class 3 service; 25 % excess capacity |
| | 0 1 1 0 | I _P ; Class 3 service; 50 % excess capacity |
| | 0 1 1 1 | I _P ; Class 3 service; 100 % excess capacity |

NOTE: The excess capacity indicated for the Class 3 services are target figures only. The actual excess capacity is defined by the connection used.

Channel arrangement (octets 4, 4a, 5, 5a, 6, 6a):

| Bits | 4 3 2 1 | Meaning |
|------|----------------------------|--------------|
| | 0 0 0 0 | User defined |
| | 0 0 0 1 | B1 |
| | 0 0 1 0 | B2 |
| | 1 0 0 0 | D1 |
| | All other values reserved. | |

Channel rate coding (octets 4, 4a, 5, 5a, 6, 6a):

| Bits | 7 6 5 | Meaning |
|------|----------------------------|-------------------------|
| | 0 0 0 | 00 kbit/s (channel off) |
| | 0 0 1 | 08 kbit/s |
| | 0 1 0 | 16 kbit/s |
| | 0 1 1 | 32 kbit/s |
| | 1 0 0 | 64 kbit/s |
| | All other values reserved. | |

7.7.34 Reject reason

The purpose of the <<REJECT-REASON>> information element is to indicate the reason why a request is rejected by the FT or PT.

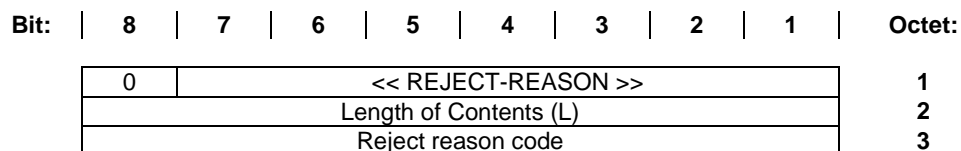


Figure 76: REJECT-REASON information element

Reject reason coding (octet 3):

| Value(hex) | Meaning (Reject reason) |
|------------|--|
| 01 | TPUI unknown |
| 02 | IPUI unknown |
| 03 | network assigned identity unknown |
| 05 | IPEI not accepted |
| 06 | IPUI not accepted |
| 10 | authentication failed |
| 11 | no authentication algorithm |
| 12 | authentication algorithm not supported |
| 13 | authentication key not supported |
| 14 | UPI not entered |
| 17 | no cipher algorithm |
| 18 | cipher algorithm not supported |
| 19 | cipher key not supported |
| 20 | incompatible service |
| 21 | false LCE reply (no corresponding service) |
| 22 | late LCE reply (service already taken) |
| 23 | invalid TPUI |
| 24 | TPUI assignment limits unacceptable |
| 2F | insufficient memory |
| 30 | overload (see note) |
| 40 | test call back: normal, en-bloc |
| 41 | test call back: normal, piecewise |
| 42 | test call back: emergency, en-bloc |
| 43 | test call back: emergency, piecewise |
| 5F | invalid message |
| 60 | information element error |
| 64 | invalid information element contents |
| 70 | timer expiry |
| 76 | PLMN not allowed |
| 80 | Location area not allowed |
| 81 | National roaming not allowed in this location area |

All other values are reserved.

NOTE: If a {LCE-PAGE-REJECT} message with the <<REJECT-REASON>> "overload" is received, the portable part should try to access an other radio fixed part belonging to the same paging area.

7.7.35 RES

The purpose of the authentication parameter <<RES>> information element is to provide the calculated authentication response signature.

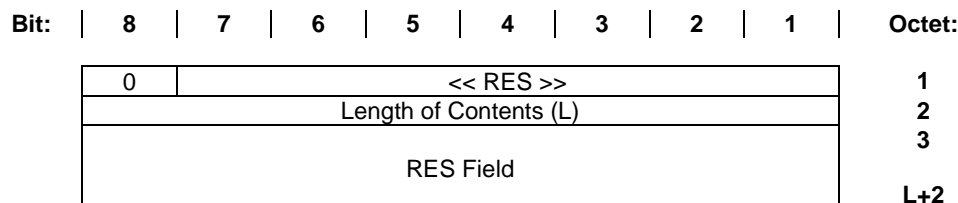


Figure 77: RES information element

NOTE: This information element is used for either the RES1 or the RES2 information. The actual contents are determined by the direction of transmission.

- RES field coding (octet 3 to 6);
- RES shall be coded with the natural binary value with the least significant bit in position 1 of octet L+2.

For a multi-octet field, the order of bit values progressively decreases as the octet number increases.

7.7.36 RS

The purpose of the authentication parameter <<RS>> information element is to provide a number to be used together with <<RAND>> and the authentication key to calculate the authentication response signature.

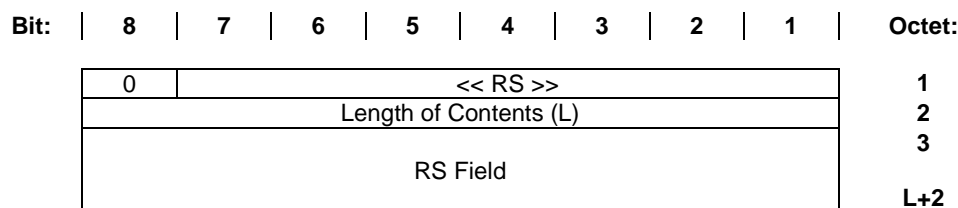


Figure 78: RS information element

- RS field coding (octet 3 to L+2);
- RS shall be coded with the natural binary value with the least significant bit in position 1 of octet L+2.

7.7.37 Segmented info

The purpose of the <<SEGMENTED-INFO>> element is to indicate that the message in which it occurs contains only part of a segmented information element. When used, this element shall always appear immediately before the segmented element to which it refers.

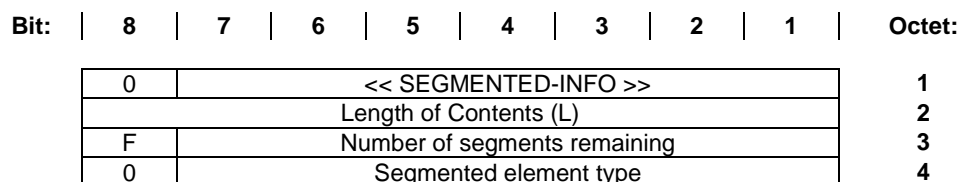


Figure 79: SEGMENTED-INFO information element

F bit coding:

| Bit | 8 | Meaning |
|-----|---|----------------------------|
| | 1 | First segment follows |
| | 0 | Subsequent segment follows |

No of segments remaining: the number of remaining segments (including the following segment) that are still to be sent. This is coded with the natural binary value, with the least significant bit in position 1.

Segmented element type: the normal coding of the segmented information element (shall only refer to a variable length information element).

If the <<segmented-info>> information element is used, then it shall only permit message segmentation with respect to a single information element only.

7.7.38 Service change info

The purpose of the <<SERVICE-CHANGE-INFO>> element is to indicate the attributes of the proposed service change.

| | | | | | | | | | |
|-------------|------------------------|---------------------------|----------|-------------|-----------------|----------|----------|----------|---------------|
| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
| | 0 | << SERVICE-CHANGE-INFO >> | | | | | | | 1 |
| | Length of Contents (L) | | | | | | | | 2 |
| | 0/1 | Coding standard | M | Change Mode | | | | | 3 |
| | 1 | Extended change mode | | | | | | | 3a |
| | 1 | A attributes | | R | B attributes | | | | 4 |

Figure 80: SERVICE-CHANGE-INFO information element

Coding standard:

| | | |
|-------------|------------|----------------------------|
| Bits | 7 6 | Meaning |
| | 0 0 | DECT standard coding |
| | | All other values reserved. |

M (Master) coding:

| | | |
|-------------|----------|---------------------------|
| Bits | 5 | Meaning |
| | 0 | Initiating side is master |
| | 1 | Receiving side is master |

Change mode coding:

| | | |
|-------------|----------------|---|
| Bits | 4 3 2 1 | Meaning |
| | 0 0 0 0 | None |
| | 0 0 0 1 | Connection Reversal |
| | 0 0 1 0 | Bandwidth change (see clause 9.6) |
| | 0 0 1 1 | Modulation scheme change (see clause 9.6) |
| | 0 1 0 0 | Rerouting (of U-plane links) (see clause 9.6) |
| | 0 1 0 1 | Bandwidth plus modulation scheme change (see clause 9.6) |
| | 0 1 1 0 | Rerouting plus bandwidth change (see clause 9.6) |
| | 0 1 1 1 | Bandwidth or modulation scheme change (see clause 9.6) |
| | 1 0 0 0 | Suspend |
| | 1 0 0 1 | Resume |
| | 1 0 1 0 | Voice/data change to data (see note 1) |
| | 1 0 1 1 | Voice/data change to voice (see note 1) |
| | 1 1 0 0 | IWU attribute change |
| | 1 1 1 0 | Profile/Basic service and IWU attributes change (see notes 1 and 2) |
| | 1 1 1 1 | Reserved for extension (see note 2) |
| | | All other values reserved. |

When using the reserved value, octet 3a shall follow containing extended coding of the service change.

Octet 4 shall only appear for "suspend" and "resume" codings.

NOTE 1: The procedures for the use of these codings are specified in the profiles for which such service changes can be supported, such as in the Mobility Class 2 Data Services Profiles.

NOTE 2: When using the "Profile/Basic service and IWU attributes change" or "reserved" value, octet 3a follows. The coding of octet 3a is dependent on the change mode codings (octet 3).

Extended change mode for "Profile/Basic service and IWU attributes change":

| | | | | | | | | | | |
|-------------|---|---|---|---|---|---|---|---|--|---------------|
| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | Octet: |
| | 1 | 0 | 0 | 0 | Coded as bits 4-1 of <<Basic service>> | | | | | 3a |

Figure 81**Figure 82: Void**

Extended change mode for "reserved" is reserved for further standardization.

A attributes coding:

| Bits | 7 6 5 | Meaning |
|-------------|--------------|----------------------------|
| | 0 0 0 | Not applicable |
| | 0 1 0 | Maintain old connection(s) |
| | 0 1 1 | Release old connection(s) |

Reset (R) coding:

| Bits | 4 | Meaning |
|-------------|----------|------------------------------|
| | 0 | Do not reset state variables |
| | 1 | Reset state variables |

B attributes coding:

| Bits | 3 2 1 | Meaning |
|-------------|--------------|-------------------------|
| | 0 0 0 | Not applicable |
| | 0 1 0 | Interrupt data transfer |
| | 0 1 1 | Maintain data transfer |

7.7.39 Service class

The purpose of the <<SERVICE-CLASS>> information element is to identify services which a PT is allowed to use.

| | | | | | | | | | | |
|-------------|------------------------|---------------------|---|---|---|---|---|---|--|---------------|
| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | Octet: |
| | 0 | << SERVICE-CLASS >> | | | | | | | | 1 |
| | Length of Contents (L) | | | | | | | | | 2 |
| | Service class field | | | | | | | | | 3 |

Figure 83: SERVICE-CLASS information element**Service class field coding (octet 3a):**

| Bits | 8 7 6 5 4 3 2 1 | Meaning |
|-------------|------------------------|---|
| | 0 0 0 0 0 0 0 1 | One nominated number only may be called |
| | 0 0 0 0 0 0 1 0 | As above and local calls are allowed |
| | 0 0 0 0 0 0 1 1 | As above and national calls are allowed |
| | 0 0 0 0 0 1 0 0 | As above and mobile and premium service calls are allowed |
| | 0 0 0 0 0 1 0 1 | As above and international calls are allowed |
| | 0 0 0 0 0 1 1 0 | As above and satellite services are allowed |

7.7.40 Setup capability

The purpose of the <<SETUP-CAPABILITY>> element is to convey some aspects of the PP call setup capabilities to the FP during location registration.

| | | | | | | | | | |
|-------------|------------------------|------------------------|----------|----------|----------|----------|----------|----------|---------------|
| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
| | 0 | << SETUP-CAPABILITY >> | | | | | | | 1 |
| | Length of Contents (L) | | | | | | | | 2 |
| | 0/1 | Protocol Discriminator | | | Setup | | Page | | 3 |
| | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 3a |
| | Spare (see note) | | | | | | | | |

NOTE: Explicit provision for extension of this element is provided. Implementors should use the 0/1 ext flag (bit 8) to detect the use of additional octets in future versions. Exact coding may be defined in relevant profiles.

Figure 84: SETUP-CAPABILITY information element

Page capability coding (octet 3):

| Bits | 2 1 | Meaning |
|------|----------------------------|---------------|
| | 0 1 | Normal paging |
| | 1 0 | Fast paging |
| | All other values reserved. | |

Setup capability coding (octet 3):

| Bits | 4 3 | Meaning |
|------|----------------------------|--------------|
| | 0 1 | Normal setup |
| | 1 0 | Fast setup |
| | All other values reserved. | |

Protocol Discriminator (octet 3):

| Bits | 7 6 5 | Meaning |
|------|----------------------------|--------------------------------|
| | 0 0 0 | Shall not be used (see note 2) |
| | 0 0 1 | DPRS (see note 3) |
| | All other values reserved. | |

NOTE 1: For backwards compatibility with terminals already using this information element complying with versions of the standard before ed4.

NOTE 2: The exact coding of the octets to follow is to be defined in the DPRS profile.

7.7.41 Terminal capability

The purpose of the <<TERMINAL-CAPABILITY>> element is to convey some aspects of the PP capabilities to the FP during call establishment.

| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
|------|--|-----|-----|-------|----------------------|-------|------|----|-----------------|
| 0 | << TERMINAL-CAPABILITY >> | | | | | | | | 1 |
| | Length of Contents (L) | | | | | | | | 2 |
| 0/1 | tone capabilities | | | | display capabilities | | | | 3 |
| 0/1 | echo parameter | | | N-REJ | | A-VOL | | | 3b (see note 1) |
| 0/1 | slot type capability | | | | | | | | 3c |
| 0/1 | Number of stored display characters (MS) | | | | | | | | 3d |
| 0/1 | Number of stored display characters (LS) | | | | | | | | 3e |
| 0/1 | Number of lines in (physical) display | | | | | | | | 3f |
| 0/1 | Number of characters/line | | | | | | | | 3g |
| 0/1 | Scrolling behaviour field | | | | | | | | 3h |
| ext | | | | | | | | | |
| 0/1 | Profile indicator_1 | | | | | | | | 4 |
| 0/1 | Profile indicator_2 | | | | | | | | 4a |
| 0/1 | Profile indicator_3 | | | | | | | | 4b |
| 0/1 | Profile indicator_4 | | | | | | | | 4c |
| 0/1 | Profile indicator_5 | | | | | | | | 4d |
| 0/1 | Profile indicator_6 | | | | | | | | 4e |
| 0/1 | Profile indicator_7 | | | | | | | | 4f |
| ext | | | | | | | | | |
| 0/1 | 0 | 0 | 0 | 0 | control codes | | | | 5 |
| | spare | | | | | | | | |
| 0/1 | escape to 8 bit character sets_1 (see note 12) | | | | | | | | 5a |
| ext | | | | | | | | | |
| 0/1 | Blind slot indication | | sp0 | sp1 | sp2 | sp3 | sp4 | 6 | |
| 1 | sp5 | sp6 | sp7 | sp8 | sp9 | sp10 | sp11 | 6a | |

Figure 85: TERMINAL-CAPABILITY information element

Display capability coding (octet 3):

| Bits | 4 3 2 1 | Meaning |
|------|---------|----------------------------|
| | 0 0 0 0 | Not applicable |
| | 0 0 0 1 | No display (see note 8) |
| | 0 0 1 0 | Numeric (see note 10) |
| | 0 0 1 1 | Numeric-plus (see note 11) |
| | 0 1 0 0 | Alphanumeric (see note 12) |
| | 0 1 0 1 | Full display (see note 13) |

All other values reserved.

Tone capability coding (octet 3):

| Bits | 7 6 5 | Meaning |
|------|-------|---|
| | 0 0 0 | Not applicable |
| | 0 0 1 | No tone capability (see note 8) |
| | 0 1 0 | dial tone only |
| | 0 1 1 | ITU-T Recommendation E.182 [44] tones supported (see note 14) |
| | 1 0 0 | Complete DECT tones supported |

All other values reserved.

Echo parameters (octet 3b):

| Bits | 7 6 5 | Meaning |
|------|-------|--|
| | 0 0 0 | Not applicable |
| | 0 0 1 | Minimum TCL (> 34 dB); (see notes 8 and 9) |
| | 0 1 0 | Full TCL (> 46 dB); (see note 9) |

All other values reserved.

Portable part ambient Noise REjection capability (N-REJ) (octet 3b):

| Bits | 4 3 | Meaning |
|------|-----|--|
| | 0 0 | Not applicable |
| | 0 1 | No noise rejection (see notes 8 and 9) |
| | 1 0 | Noise rejection provided (see note 9) |
| | 1 1 | Reserved |

Adaptive VOLume control provision (A-VOL) (octet 3b):

| Bits | 2 1 | Meaning |
|------|-----|---|
| | 0 0 | Not applicable |
| | 0 1 | No PP adaptive volume control (see notes 8 and 9) |
| | 1 0 | PP adaptive volume control used (see note 9) |
| | 1 1 | Disable FP adaptive volume control (see note 9) |

Slot type capability (octet 3c):

This is a bit pattern indicating the slot type capabilities. A "1" in a bit position indicates capability of the indicated slot type; a "0" indicates no capability.

| | |
|--------|-------------------------|
| Bit 1: | Half slot; $j = 0$ |
| Bit 4: | Full slot; (see note 3) |
| Bit 5: | Double slot |

All other bits are reserved, and should be set to "0".

Number of stored display characters (octets 3d, 3e):

Valid values for the number of stored display characters shall be in the range 0 to 16 383.

Number of lines in (physical) display (octet 3f):

Valid values for the number of lines in the physical display shall be in the range 0 to 127.

Number of Characters per line (octet 3g):

Valid values of the number of characters per line in the physical display shall be in the range 0 to 127.

Scrolling Behaviour field (octet 3h):

The value in this field indicates a specific scrolling behaviour of the display.

Scrolling Behaviour coding (octet 3h):

| Bits | 7 6 5 4 3 2 1 | Meaning |
|------|----------------------------|----------------------------|
| | 0 0 0 0 0 0 | Not specified |
| | 0 0 0 0 0 1 | Scrolling behaviour type 1 |
| | 0 0 0 0 1 0 | Scrolling behaviour type 2 |
| | All other values reserved. | |

Scrolling Behaviour types 1, 2:

Details of scrolling behaviour are included in normative annex J.

Profile indicator (octet group 4):

This is a bit mapped octet group. A "1" indicates support for the specified profile. Reserved bits shall be set to zero and shall not be checked in the receiver.

Profile Indicator_1 Coding (Octet 4):

| Bits | 7 6 5 4 3 2 1 | Meaning |
|------|---------------|---|
| | x x x x x 1 | CAP supported |
| | x x x x x 1 x | GAP supported |
| | x x x x 1 x x | DECT/GSM interworking profile supported |
| | x x x 1 x x x | ISDN End-system supported |
| | x x 1 x x x x | LRMS (EN 300 757 [50]) supported |
| | x 1 x x x x x | DPRS Stream supported |
| | 1 x x x x x x | DPRS asymmetric bearers supported |

Profile Indicator_2 Coding (Octet 4a):

| Bits | 7 6 5 4 3 2 1 | Meaning |
|------|---------------|---|
| | x x x x x x 1 | DPRS FREL supported |
| | x x x x x 1 x | Data Services Profile D, Class 2 supported |
| | x x x x 1 x x | ISDN Intermediate Access Profile supported |
| | x x x 1 x x x | DECT/UMTS-GSM interworking - UMTS-GSM Bearer service supported |
| | x x 1 x x x x | DECT/UMTS-GSM interworking - UMTS-GSM SMS service supported |
| | x 1 x x x x x | DECT/UMTS-GSM interworking - UMTS-GSM Facsimile service supported |
| | 1 x x x x x x | RAP 1 Profile (EN 300 765-1 [52]) supported |

Profile/Application Indicator_3 Coding (Octet 4b):

| Bits | 7 6 5 4 3 2 1 | Meaning |
|------|---------------|--|
| | x x x x x x 1 | DECT/GSM dual mode terminal |
| | x x x x x 1 x | WRS supported |
| | x x x x 1 x x | SMS over LRMS(EN 300 757 [50]) supported |
| | x x x 1 x x x | DMAP supported |
| | x x 1 x x x x | Multipoint CTA (EN 300 765-1 [52]) |
| | x 1 x x x x x | Ethernet supported |
| | 1 x x x x x x | Token Ring supported |

Profile/Application Indicator_4 Coding (Octet 4c):

| Bits | 7 6 5 4 3 2 1 | Meaning |
|------|---------------|---|
| | x x x x x x 1 | IP supported |
| | x x x x x 1 x | PPP supported |
| | x x x x 1 x x | V.24 supported |
| | x x x 1 x x x | C _F supported |
| | x x 1 x x x x | I _{PQ} services supported (note 2) |
| | x 1 x x x x x | RAP 2 Profile supported (EN 300 765-2 [61]) |
| | 1 x x x x x x | reserved |

Profile/Application Indicator_5 Coding (Octet 4d):

| Bits | 7 6 5 4 3 2 1 | Meaning |
|------|---------------|--|
| | x x x x x x 1 | 2-level modulation scheme supported (B+Z field) (see note 3) |
| | x x x x x 1 x | 4-level modulation scheme supported (B+Z field) |
| | x x x x 1 x x | 8-level modulation scheme supported (B+Z field) |
| | x x x 1 x x x | 16-level modulation scheme supported (B+Z field) |
| | x x 1 x x x x | 2-level modulation scheme supported (A field) |
| | x 1 x x x x x | 4-level modulation scheme supported (A field) |
| | 1 x x x x x x | 8-level modulation scheme supported (A field) |

Profile/Application Indicator_6 Coding (Octet 4e):

| Bits | 7 6 5 4 3 2 1 | Meaning |
|---------------|---------------|--|
| x x x x x x 1 | | DECT/UMTS interworking profile supported (TS 101 863 [64]) |
| x x x x x 1 x | | DECT/UMTS interworking - GPRS services supported (TS 101 863 [64]) |
| x x x x 1 x x | | reserved |
| x x x 1 x x x | | reserved |
| x x 1 x x x x | | reserved |
| x 1 x x x x x | | reserved |
| 1 x x x x x x | | reserved |

Profile/Application Indicator_7 Coding (Octet 4f):

| Bits | 7 6 5 4 3 2 1 | Meaning |
|---------------|---------------|--|
| x x x x x x 1 | | 64-level modulation scheme supported (B+Z field) |
| x x x x x 1 x | | reserved |
| x x x x 1 x x | | reserved |
| x x x 1 x x x | | reserved |
| x x 1 x x x x | | reserved |
| x 1 x x x x x | | reserved |
| 1 x x x x x x | | reserved |

Control Codes (octet 5):

This field indicates a set of DECT display control characters which the PT supports. Support for "clear display" control code is mandatory for all displays.

Control Codes coding(octet 5) (note 4):

| Bits | 3 2 1 | Meaning |
|----------------------------|-------|--|
| 0 0 0 | | Not specified |
| 0 0 1 | | 0CH (clear display) |
| 0 1 0 | | Coding 001 plus 08H to 0BH and 0DH. |
| 0 1 1 | | Coding 010 plus 02H, 03H, 06H, 07H, 19H, 1AH |
| 1 0 0 | | Coding 011 plus 0EH, 0FH |
| All other values reserved. | | |

Escape to 8 bit character sets_1 (octet 5a):

This bit mapped octet is used to indicate additional character sets which may be invoked by using escape sequences as defined in ISO/IEC 2022 [13]. A "1" indicates support for the specified character set and that the PT correctly interprets ISO/IEC 2022 [13] escape sequences, see clause D.2.4.

Escape to 8 bit character sets_1 coding(octet 5 a):

| Bits | 7 6 5 4 3 2 1 | Meaning |
|---------------|---------------|--|
| x x x x x x 1 | | Latin alphabet no 1 supported ISO/IEC 8859-1 [49] |
| x x x x x 1 x | | Latin alphabet no 9 supported ISO/IEC 8859-15 [55] |
| x x x x 1 x x | | Latin alphabet no 5 supported ISO/IEC 8859-9 [57] |
| x x x 1 x x x | | Greek alphabet supported ISO/IEC 8859-7 [56] |
| x x 1 x x x x | | reserved |
| x 1 x x x x x | | reserved |
| 1 x x x x x x | | reserved |

Blind slot indication (octet 6) (see notes 6 and 7):

| | | |
|------|-----|--|
| Bits | 7 6 | Meaning |
| | 0 0 | No blind slots |
| | 0 1 | Setup is not possible on both slots adjacent to an active slot |
| | 1 0 | Setup is not possible on every second slot |
| | 1 1 | Limitations indicated in the following bits (octet 6 and 6a) |

sp_x (octet 6 and octet 6a):

For sp_x with $0 \leq x \leq 11$:

if $sp_x = 1$: then full slot pair $\{(x),(x + 12)\}$ is not "blind", i.e. available;

else ($sp_x = 0$) full slot pair $\{(x),(x + 12)\}$ is "blind", i.e. not available.

NOTE 1: Octet 3a is intentionally absent.

NOTE 2: For the definition of the I_{PQ} services see EN 300 175-4 [4] and EN 300 175-3 [3].

NOTE 3: For definition of the modulation schemes see annex D of EN 300 175-2 [2].

NOTE 4: The display behaviour in response to some control codes may be dependent on the scrolling behaviour of the display.

NOTE 5: Void.

NOTE 6: The blind slot information applies to the same slot number of all available carriers.

NOTE 7: Older equipment might not include octet group 6. In this case one should assume that the blind slot information is unknown.

NOTE 8: This capability is assumed as the default value unless otherwise specified by a service profile, if the <<TERMINAL-CAPABILITY>> information element is omitted.

NOTE 9: Refer to EN 300 175-8 [7] for a definition of TCL, PP Adaptive Volume (A-VOL) control, PP ambient Noise Rejection (N-REJ) and the usage of these parameters.

NOTE 10: "Numeric" indicates support for at least the following characters: space, 0-9, *, #. "Numeric-plus" indicates support for at least the following characters: space, 0-9, *, #, a, b, c, d.

NOTE 11: "Alphanumeric" indicates support for at least the following characters: space, 0-9, *, #, a-z and A-Z.

NOTE 12: "Full display" indicates support for the full DECT character set. (i.e. displayable characters with character codes up to 7F).

NOTE 13: "E.182 tones supported" indicates support of all of the E.182 compatible tones identified in clause 7.6.8.

NOTE 14: More octets may follow for the indication of further profiles or character sets.

7.7.42 Transit delay

The purpose of the <<TRANSIT-DELAY>> element is to indicate the allowable delay that shall be imposed for data transmitting the DECT subnetwork.

| | | | | | | | | | | |
|------|------------------------|---------------------|----------------|---|---|---|---|---|--------|---|
| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: | |
| | 0 | << TRANSIT-DELAY >> | | | | | | | 1 | |
| | Length of Contents (L) | | | | | | | | | 2 |
| | 1 | 0 | Forward Delay | | | | | | | 3 |
| | 1 | 0 | Backward Delay | | | | | | | 4 |

Figure 86: TRANSIT-DELAY information element

Forward delay (backward delay) octet 3 (and 4): the <<TRANSIT-DELAY>> shall be coded with the natural binary value, and the result placed in the octet with the least significant bit in position 1. Delay shall be calculated in steps of 1 TDMA frame (10 ms).

Allowable values are "1" to "63".

7.7.43 Window size

The purpose of the <<DLC-U-plane-parameters>> element is to indicate (and optionally to negotiate) the window size to be used for frame transmission. replace current content with the following:

| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
|------|------------------------|-------------------------------|---|---|---|---|---|---|-----------|
| | 0 | << WINDOW SIZE >> | | | | | | | 1 |
| | Length of Contents (L) | | | | | | | | 2 |
| | 0 | Window size value (forward) | | | | | | | 3 |
| | 0/1 ext | Window size value continue | | | | | | | 3a |
| | 0/1 ext | Maximum PDU length (forward) | | | | | | | 3b |
| | 1 | SDU LAPU timer (forward) | | | | | | | 3c |
| | 0 | Window size value (backward) | | | | | | | 4 |
| | 0/1 ext | Window size value (continue) | | | | | | | 4a |
| | 0/1 ext | Maximum PDU length (backward) | | | | | | | 4b |
| | 1 | SDU LAPU timer (backward) | | | | | | | 4c |

Figure 87: WINDOW SIZE information element

If octet group 4 is omitted, the backward values shall be understood to be equal to the forward values.

Window size value (Forward and backward) octet 3 and 3a (and 4 and 4a): the <<WINDOW-SIZE>> shall be coded with the natural binary value, and the result placed starting in octet 3a (4a) with the least significant bit in position 1 of octet 3a (4a).

The value "0" shall be used to indicate "not applicable" in the event that no window size is defined for the forward direction.

Maximum (Forward and backward) PDU length (octets 3b, 4b) is coded as natural binary value and the value of this field multiplied by 60 bytes shall give the maximum size of the PDU used by a profile.

SDU LAPU timer (Forward and backward) (octet 3d, 4d) value is coded as natural binary value.

7.7.44 ZAP field

The purpose of the <<ZAP-FIELD>> information element is to provide the FT with the ZAP value, which is stored in the PT and is related to a subscription.

| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
|------|------------------------|-----------------|---|---|----------------|---|---|---|----------|
| | 0 | << ZAP-FIELD >> | | | | | | | 1 |
| | Length of Contents (L) | | | | | | | | 2 |
| | 0 | 0 | 0 | 0 | Contents field | | | | 3 |

NOTE 1: Contents field (octet 3);

NOTE 2: Contains the 4 bit ZAP value.

Figure 88: ZAP-FIELD information element

7.7.45 Escape to proprietary

The purpose of the <<ESCAPE-TO-PROPRIETARY>> information element is to send non-standardized information inside a DECT message.

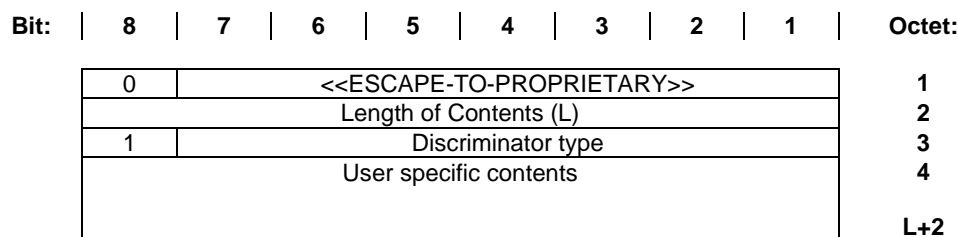


Figure 89: Information element format using ESCAPE-TO-PROPRIETARY

Discriminator type (octet 3):

Bits 7 6 5 4 3 2 1 Meaning
 0 0 0 0 0 0 0 Unspecified
 0 0 0 0 0 0 1 EMC
 All other values reserved.

User specific contents field (octets 4 to L+2) for Discriminator type "EMC":

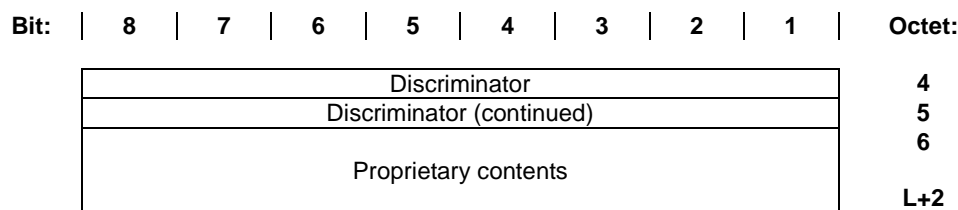


Figure 90

The discriminator consists of 2 octets (octets 4 and 5) and contains the EMC.

7.7.46 Model identifier

The purpose of <<MODEL-IDENTIFIER>> is to identify the model version of a DECT PT to the FT or vice versa.

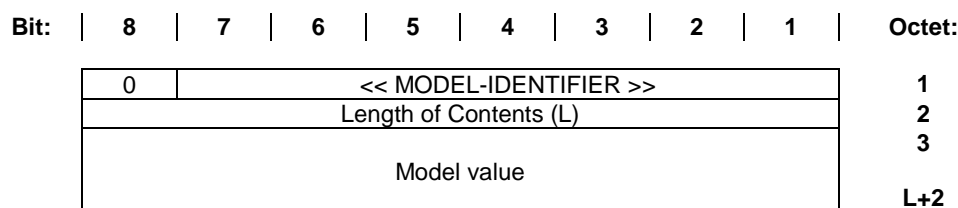


Figure 91: MODEL IDENTIFIER information element

NOTE: Model value can represent DECT MANIC+MODIC or IMEISV model identifier types. Distinction is taken based on the Length of Contents (L) information.

Model value coding for DECT MANIC +MODIC containing the EMC code and the model code:

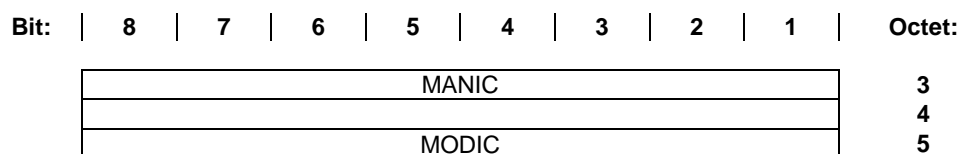


Figure 92

MANIC coding (octets 3 and 4): the field contains an EMC value allocated to a manufacturer. Generally the first allocated EMC value will be used. MANIC may be different to EMC in IPEI. The most significant bit of MANIC is in octet 3 bit 8.

MODIC coding (octet 5): the field contains an eight bit value, identifying the model version of the PT/FT. The combination of MANIC and MODIC should be unique for each hardware/software variant of a PT/FT. The most significant bit of MODIC is in octet 5 bit 8. 0 shall have the meaning of "model number not supported".

Model value for IMEISV containing the IMEISV code:

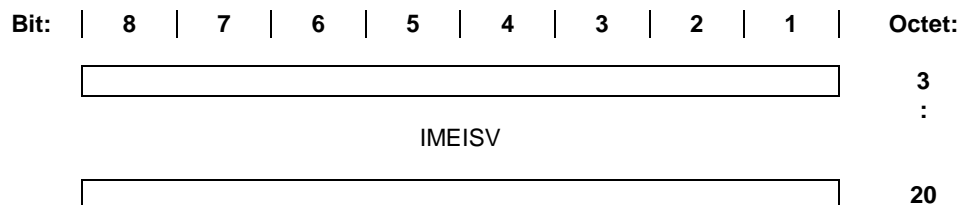


Figure 93

IMEISV coding (octets from 3 to 20): the field contents is specified in EN 300 370 [51].

7.7.47 MMS Generic Header

The usage and coding of the <<MMS Generic Header>> information element is defined in the LRMS profile EN 300 757 [50].

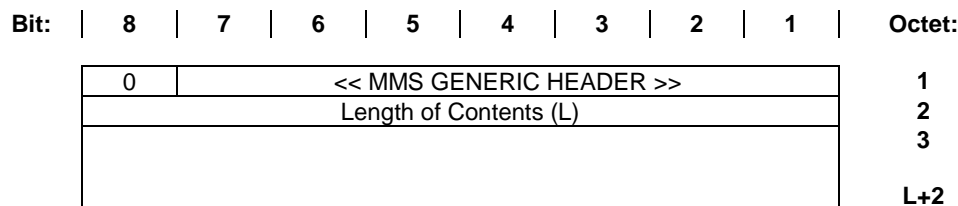


Figure 94: MMS GENERIC HEADER information element

7.7.48 MMS Object Header

The usage and coding of the <<MMS Object Header>> information element is defined in the LRMS profile EN 300 757 [50].

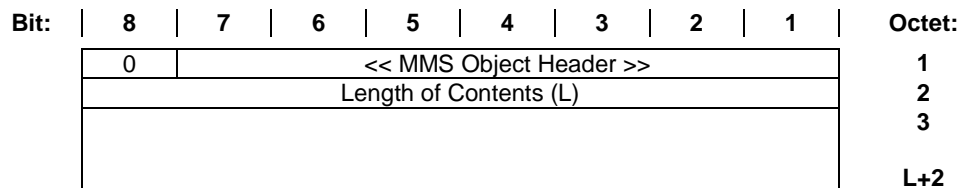


Figure 95: MMS OBJECT HEADER information element

7.7.49 MMS Extended header

The usage and coding of the <<MMS Extended Header>> information element is defined in the LRMS profile EN 300 757 [50].

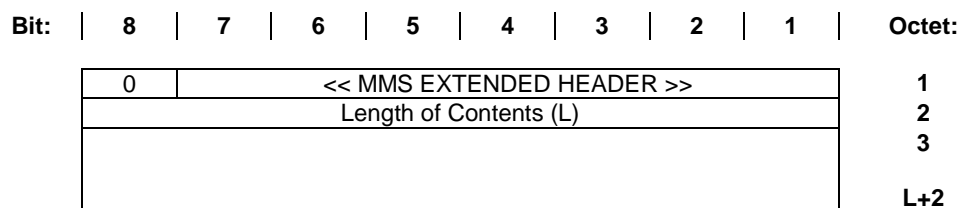


Figure 96: MMS EXTENDED HEADER information element

7.7.50 Time-Date

The usage and coding of the <<Time-Date>> is to provide a time and/or date.

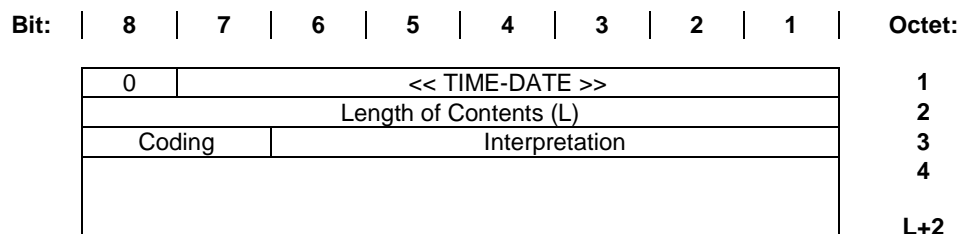


Figure 97: TIME-DATE information element

Coding (octet 3):

| Bits | 8 7 | Meaning |
|------|-----|---------------|
| | 0 1 | Time |
| | 1 0 | Date |
| | 1 1 | Time and Date |

All other values are reserved.

Coding defines how the Time-Date element is structured. The coding value 1 1 "Time and date" indicates that the all fields in octets 4 - 10 of the element are present. The coding value 0 1 "Time" indicates that the octet 4 contains <Hour>, octet 5 <Minute>, octet 6 <Second> and octet 7 <Time Zone> field thus containing only the time information. The coding value 1 0 "Date" indicates that the octets 7 - 10 are omitted and the element contains only the date information. Coding 1 1 is the default value.

Interpretation (octet 3):

| Bits | 6 5 4 3 2 1 | Meaning |
|------|-------------|--|
| | 0 0 0 0 0 0 | The current time/date |
| | 0 0 0 0 0 1 | Time duration (in Years, Months, Days and/or Hours, Minutes, Seconds, Time Zone = 0) |
| | 1 0 0 0 0 0 | The time/date at which to start forwarding/delivering the MMS message (see note) |
| | 1 0 0 0 0 1 | The time/date the MMS user data was created (see note) |
| | 1 0 0 0 1 0 | The time/date the MMS user data was last modified (see note) |
| | 1 0 0 0 1 1 | The time/date the message was received by the MCE (see note) |
| | 1 0 0 1 0 0 | The time/date the message was delivered/accessed by the End Entity (see note) |
| | 1 0 1 0 0 0 | The time/date stamp for use as an identifier (see note) |

All other values are reserved.

NOTE: These codings have specific meanings within the context of profiles.

Octets 4 to 6 coding (Time/Date element coding = 1 1 or 1 0)**Table 77**

| Octet field | Digits (Semi octets) | Octet |
|-------------|-------------------------|-------|
| Year | 2 | 4 |
| Month | 2 | 5 |
| Day | 2 | 6 |

Octets 4 to 7 coding (Time/Date element coding = 0 1)**Table 78**

| Octet field | Digits (Semi octets) | Octet |
|-------------|-------------------------|-------|
| Hour | 2 | 4 |
| Minute | 2 | 5 |
| Second | 2 | 6 |
| Time Zone | 2 | 7 |

Octets 7 to 10 coding (Time/Date element coding = 1 1)**Table 79**

| Octet field | Digits (Semi octets) | Octet |
|-------------|-------------------------|-------|
| Hour | 2 | 7 |
| Minute | 2 | 8 |
| Second | 2 | 9 |
| Time Zone | 2 | 10 |

The Time Zone indicates the difference, expressed in quarters of an hour, between the local time and GMT. In the first of the two semi-octets, the first bit represents the algebraic sign of this difference (0: positive; 1: negative).

The Time Zone code enables the receiver to calculate the equivalent time in GMT from the other semi-octets in the element, or indicate the time zone (GMT, GMT+1H, etc.), or perform other similar calculations as required by the implementation.

7.7.51 Ext h/o indicator

The purpose of <<ext h/o indicator>> is to allow the PP to identify possible external handover candidates by comparing the PARI of the FP in use and the PARI of other FPs.

| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
|------|-------------------------|------------------|---|---|---|---|---|---|--------|
| 0 | << EXT H/O INDICATOR >> | | | | | | | | 1 |
| | Length of Contents (L) | | | | | | | | 2 |
| OID | SYNC | length indicator | | | | | | | 3 |

Figure 98: EXT H/O INDICATOR information element**length indicator coding (octet 3):**

| Value | Meaning |
|---------|---|
| 0 | no handover candidates available via the <<ext. h/o indicator>> |
| 1.to.31 | 1+ ext h/o length indicator |

NOTE: In case value 0 is applied, handover candidates may still be available via the handover retrieval procedure.

The ext h/o length indicator defines how many bits of the PARI are relevant for evaluating the external handover candidate.

OID coding (octet 3):

| Bits | 8 | Meaning |
|------|---|--|
| | 0 | Other fixed part IDs not available using parameter retrieval procedure |
| | 1 | Other fixed part IDs available using parameter retrieval procedure |

SYNC coding (octet 3):

| Bits | 7 6 | Meaning |
|------|-----|---|
| | 0 0 | No synchronization, or no information provided. |
| | 0 1 | Indicates that all identified FPs are multiframe synchronized |
| | 1 0 | Indicates that all identified FPs are multiframe and PSCN synchronized |
| | 1 1 | Indicates that all identified FPs are multiframe, multiframe number and PSCN synchronized |

7.7.52 Authentication Reject Parameter

The usage and coding of the << Authentication Reject Parameter >> information element is defined in relevant profile.

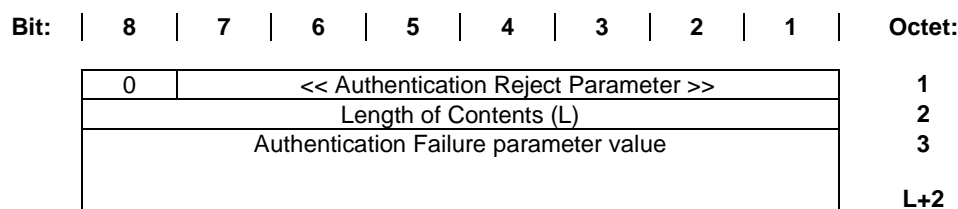


Figure 98a: Authentication Reject Parameter information element

8 B-FORMAT message structures

8.1 General

The B-FORMAT messages shall only be originated by (and supplied to) either the LCE or the CLMS entity:

| Message type | Originator |
|--------------------|------------|
| {LCE-REQUEST-PAGE} | LCE |
| {CLMS-FIXED} | CLMS |

All the messages shall be fixed length, in order to allow simple mapping of the messages on to the lower layer broadcast channels (the MAC layer BS logical channel). Refer to EN 300 175-3 [3].

All messages shall be sent to the B-SAP using the DL_BROADCAST-req or DL_EXPEDITED-req primitive. This shall use the broadcast service of the DLC.

The following formats are defined:

| Format | Frame length (octets) |
|-------------------|--------------------------------|
| - short format | 3 octets |
| - long format | 5 octets |
| - extended format | 5, 10, 15, 20, 25 or 30 octets |

Extended format messages shall be sent in a single primitive.

NOTE: Fragmentation of the message (into slot size pieces) is performed by the MAC layer. Refer to EN 300 175-3 [3].

8.2 LCE request paging messages

Request paging messages shall use one of the following formats:

- a) short format;
- b) long format.

When using short format messages, or long format messages with the IPUI address structure (see clause 8.2.2), the following default values shall apply for the missing fields:

Target number of bearers:

default value = 1.

Symmetry:

default value = symmetric connection.

Slot type:

no default value is defined;

if missing, the PT may select any suitable slot type.

MAC connection type:

no default value is defined;

the PT may select any suitable connection type.

MAC packet lifetime:

default value = unlimited.

NOTE 1: The default values are chosen so that the short format message can be used to indicate most types of single bearer duplex connection. The only exception is I_p -error-correct services that require a different packet lifetime.

For multibearer connections, or for a single bearer connection with different attributes, the long format message with TPUI address structure should be used to supply the additional service attributes. The following default attributes shall apply to this message:

Minimum number of bearers:

default value = target number of bearers.

Otherwise, the LCE header coding "unknown" shall be used. In this event only a single bearer connection of unknown service type can be established and a subsequent service modification procedure is required. Refer to EN 300 175-3 [3], clause 10.2.4.3 for more details of service modification.

NOTE 2: A subsequent service modification is essential if the LCE header coding indicates "unknown" in order to define the wanted connection attributes. Service modification may also be used in other cases (e.g. to modify a known established connection).

8.2.1 Short format message

The short format message shall contain 20 bits of information, placed into a 3 octet frame.

Short format message

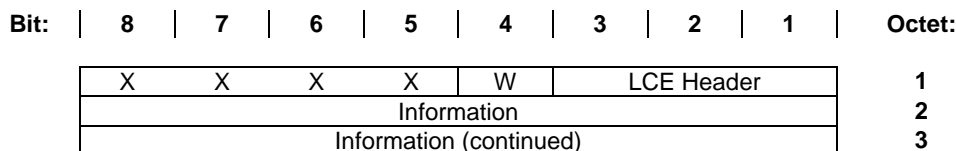


Figure 99: Short format message structure

W-bit

The W-bit coding in combination with the LCE header coding shall be used to distinguish different usage of the short format message, see below:

Bit 4
All values allowed

LCE header coding

The LCE header coding shall indicate the U-plane service (MAC service type) required. In addition it may indicate whether the message is used to start ringing at the portable part, see clause 14.4:

| Bits | 3 2 1 | U-plane service (MAC service type) |
|------|-------|--|
| | 0 0 0 | None |
| | 0 0 1 | Unknown (MAC service type) and Ringing |
| | 0 1 0 | Escape |
| | 0 1 1 | Unknown |
| | 1 0 0 | I _N -min_delay |
| | 1 0 1 | I _N -normal_delay |
| | 1 1 0 | I _P -error-detect |
| | 1 1 1 | I _P -error-correct |

NOTE 1: The coding "none" indicates that no U-plane service is required. This should be used to indicate services that only require a C-plane (e.g. MM procedures).

NOTE 2: The "I_P encoded protected"-service is not coded because this service has to be negotiated after bearer establishment.

If the paging message contains a connectionless TPUI, the U-plane coding may be used to indicate the expected service type. If the coding "unknown" is used, the PP should accept any suitable service at the indicated transmission. If the coding "none" is used, the PP should only accept C-plane connectionless services. The "none" coding is also used to announce CLMS messages.

If the coding "Unknown (MAC service type) and Ringing" is used this shall be interpreted as request for ringing according to Collective/Group ringing procedure clause 14.4 and the PP should request any suitable MAC service when it attempts to establish a link upon the outgoing call.

Octets 2 and 3

The content of octets 2 and 3 is dependent on the value of "W" and "LCE Header" and shall be interpreted as follows:

Table 80

| W | LCE Header | Octet 2 bits 5 to 8 | Octet 2 bits 1 to 4 | Octet 3 |
|---|----------------|---|--|---------|
| 1 | all except 001 | lowest 16 bits of assigned TPUI or CBI | | |
| 0 | all except 001 | lowest 16 bits of default individual TPUI | | |
| 1 | 001 | Ring pattern | group mask = sequence of "1s" or/and "0s" | |
| 0 | 001 | Ring pattern | lowest 12 bits of the assigned connectionless group TPUI or CBI | |

This reflects in two layouts of the short format paging currently defined:

| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: | |
|------|--------------------------------|---|---|---|--------------------|------------|---|---|--------|---|
| | X | X | X | X | W | LCE Header | | | 1 | |
| | ring pattern | | | | Address/Group Mask | | | | 2 | |
| | Address/Group Mask (continued) | | | | | | | | | 3 |

Figure 100: Short format message for collective or group ringing request**Ring pattern**

| Bits | 8 | 7 | 6 | 5 | Meaning |
|------|----------------------------|---|---|---|---|
| | 0 | 0 | 0 | 0 | alerting on - pattern 0 (see note 3) |
| | 0 | 0 | 0 | 1 | alerting on - pattern 1 (see note 3) |
| | 0 | 0 | 1 | 0 | alerting on - pattern 2 (see note 3) |
| | 0 | 0 | 1 | 1 | alerting on - pattern 3 (see note 3) |
| | 0 | 1 | 0 | 0 | alerting on - pattern 4 (see note 3) |
| | 0 | 1 | 0 | 1 | alerting on - pattern 5 (see note 3) |
| | 0 | 1 | 1 | 0 | alerting on - pattern 6 (see note 3) |
| | 0 | 1 | 1 | 1 | alerting on - pattern 7 (see note 3) |
| | 1 | 0 | 0 | 0 | alerting on - continuous |
| | 1 | 0 | 1 | 0 | incoming call released by the FP (see note 4) |
| | 1 | 0 | 1 | 1 | incoming call has been answered (see note 4) |
| | 1 | 1 | 1 | 1 | alerting off |
| | All other values reserved. | | | | |

A PT shall respond to all alerting patterns, but these may all produce the same sound.

NOTE 3: The use of alerting patterns is FT dependent; the resulting sound is PT dependent.

NOTE 4: The value does not represent a ring pattern but indicates stop of ringing.

Address/Group Mask

When used for group mask ringing this field shall include a sequence of 12 bits as group mask, see clause 14.4.

When used for group ringing this field shall include the lowest 12 bits of the assigned connectionless group TPUI.

When used for Collective ringing this field shall include the last 12 bits of the CBI, see EN 300 175-6 [5] clause 6.3.1.

Short format message for all other cases

| | | | | | | | | | |
|------|--------------------------|---|---|---|---|------------|---|---|--------|
| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
| | X | X | X | X | W | LCE Header | | | 1 |
| | TPUI Address | | | | | | | | 2 |
| | TPUI Address (continued) | | | | | | | | 3 |

Figure 101: Short format message for all other cases

TPUI Address

This field shall include the lowest 16 bits of the TPUI, assigned or default, in accordance of the value of "W", or the lowest 16 bits of the CBI.

Refer to EN 300 175-6 [5] for details of IPUI and TPUI.

For the address fields the order of bit values shall progressively decrease as the octet number increases.

8.2.2 Long format message

The long format message shall contain 36 bits of information, placed into a 5 octet frame. There are two structures for the long format message, and the chosen structure shall be indicated by the coding of the W bit:

| | | | | | | | | | | |
|------|---------------------|---|---|---|--------------|------------|---|---|--------|---|
| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: | |
| | X | X | X | X | W = 1 | LCE Header | | | 1 | |
| | Field 1 | | | | TPUI Address | | | | | 2 |
| | TPUI Address (cont) | | | | | | | | 3 | |
| | TPUI Address (cont) | | | | | | | | 4 | |
| | Field 2 | | | | Field 3 | | | | | 5 |

Figure 102: TPUI address structure

| | | | | | | | | | | |
|------|---------------------|---|---|---|--------------|------------|---|---|--------|---|
| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: | |
| | X | X | X | X | W = 0 | LCE Header | | | 1 | |
| | IPUI Class | | | | IPUI Address | | | | | 2 |
| | IPUI Address (cont) | | | | | | | | 3 | |
| | IPUI Address (cont) | | | | | | | | 4 | |
| | IPUI Address (cont) | | | | | | | | 5 | |

Figure 103: IPUI address structure

The address element shall be derived as follows:

W = "1": TPUI address element:

TPUI address = complete TPUI (20 bits).

W = "0": IPUI address element:

class = IPUI Class;

IPUI address = lowest 28 bits of IPUI.

For the address field, the order of bit values shall progressively decrease as the octet number increases.

LCE header coding:

Refer to clause 8.2.1.

For the TPUI address structure there are 2 distinguished interpretations depending on the value of the LCE Header.

When LCE Header \neq 010 (escape) the following coding apply:

| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
|------|---------------------|---|---|---|--------------|-----------------------|---|---|--------|
| | X | X | X | X | W = 1 | LCE Header \neq 010 | | | 1 |
| | Attributes | | | | TPUI Address | | | | 2 |
| | TPUI Address (cont) | | | | | | | | 3 |
| | TPUI Address (cont) | | | | | | | | 4 |
| | Target Bearers | | | | MAC pkt type | | | | 5 |

Figure 103a

Attributes coding:

The attributes field can contain two alternative codings that are distinguished by the setting of bit 8. This means that a paging message can specify either the slot type for symmetric connections or the asymmetric parameter.

Slot type option (Attributes):

| Bits | 8 7 6 5 | Meaning |
|------|---------|------------------|
| | 0 0 0 0 | Half slot; j = 0 |
| | 0 1 0 0 | full slot |
| | 0 1 0 1 | double slot |

Symmetry option (Attributes):

| Bits | 8 7 6 5 | Meaning |
|------|----------------------------|--|
| | 1 0 0 1 | Symmetric connection |
| | 1 1 0 0 | Asymmetric F to P with 1 duplex bearer |
| | 1 1 0 1 | Asymmetric F to P with 2 target duplex bearers |
| | 1 1 1 0 | Asymmetric P to F with 1 duplex bearer |
| | 1 1 1 1 | Asymmetric P to F with 2 target duplex bearers |
| | All other values reserved. | |

NOTE 1: The default value is assumed for the missing option.

NOTE 2: A minimum of 1 duplex bearer is required for all asymmetric connections to provide the "pilot" bearer functions. Refer to EN 300 175-3 [3].

Target bearers (advanced connections only):

| Bits | 8 7 6 5 | Meaning |
|------|---------|-----------------------------------|
| | 0 0 0 0 | Undefined: (pilot bearer only) |
| | NNNN | Target number of bearers required |

NOTE 3: The target number of bearers (NNNN) is coded with the natural binary value with the least significant bit in bit position "5". The allowable values are "1" to "15".

The target number of bearers defines the total number of paired bearers to be used for the connection. For symmetric connections this refers to the total number of duplex bearers. For asymmetric connections this refers to the total number of duplex bearers PLUS the total number of double simplex bearers.

For asymmetric connections, the direction of the double simplex bearers, and the number of duplex bearers shall be defined by using the symmetry option for "attributes" field.

MAC packet life:

| Bits | 4 3 2 1 | Meaning |
|------|---------|---|
| | 0 0 0 0 | Not applicable |
| | 1 n n n | Maximum packet lifetime (Ip; error_protect service only) |

The maximum packet lifetime (nnn) is coded with the natural binary value with the least significant bit in bit position "1". The allowable values are "0" to "7". The value "0" shall be interpreted as unlimited (i.e. infinite). The values "1" to "7" define the maximum lifetime in TDMA frames. Refer to EN 300 175-3 [3] for the use of this attribute.

When LCE Header = 010 (escape) different coding is provided as follows:

| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
|------|---------------------|---|---|---|---------------------|------------------------------|---|---|--------|
| | X | X | X | X | W = 1 | LCE Header = 010 (escape) | | | 1 |
| | Discriminator | | | | TPUI Address | | | | 2 |
| | TPUI Address (cont) | | | | | | | | 3 |
| | TPUI Address (cont) | | | | | | | | 4 |
| | spare (0000) | | | | Connection Identity | | | | 5 |

Figure 103b

Discriminator (octet 2):

| Bits | 8 7 6 5 | Meaning |
|------|----------------------------|------------------------------|
| | 0 0 0 0 | User specific |
| | 0 0 0 1 | Resume paging |
| | 0 0 1 0 | Collective and Group ringing |
| | All other values reserved. | |

Connection identity (octet 5):

| Bits | 4 3 2 1 | Meaning |
|------|---------|----------------|
| | 0 0 0 0 | Not applicable |
| | 1 n n n | LCE = n n n |

8.3 CLMS-FIXED messages

8.3.1 General message structure

Each {CLMS-FIXED} message shall contain 1 or more message sections, where each section shall contain 36 bits of information in a 5 octet frame. {CLMS-FIXED} messages can carry information equivalent to that contained in the <<ALPHANUMERIC>> information element (see clause 7.7.3) or other specific information. {CLMS-FIXED} messages shall use the extended format.

The first section of each message shall contain addressing and control information. The remaining sections shall contain any data. The contents of any given section shall be indicated by the A bit.

Each message shall only comprise complete sections, up to a maximum of 6 sections (i.e. one address section followed by up to 5 data sections). All of the sections for a complete message shall be delivered in a single primitive, and should be received in a single primitive. Refer to clause 12.3.1.

NOTE 1: The received message may be incomplete. Missing sections may not be detected by the lower layers before delivery. Missing sections may be detected by examining the length indicator element and/or the data segment numbers.

The possible data structures are defined by the protocol discriminator field.

| | | | | | | | | | |
|------|------------------------|---|---|---|-------|-------------|---|---|--------|
| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
| | X | X | X | X | A = 1 | CLMS Header | | | 1 |
| | Address | | | | | | | | 2 |
| | Address (cont) | | | | | | | | 3 |
| | Protocol Discriminator | | | | | | | | 4 |
| | Length Indicator/Data | | | | | | | | 5 |

Figure 104: CLMS-FIXED message structure: address section

NOTE 2: The contents of octets 5 is determined by the header coding.

| | | | | | | | | | |
|------|------------------|---|---|---|-------|-------------|---|---|--------|
| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
| | X | X | X | X | A = 0 | CLMS Header | | | 1 |
| | Data/Fill | | | | | | | | 2 |
| | Data/Fill (cont) | | | | | | | | 3 |
| | Data/Fill (cont) | | | | | | | | 4 |
| | Data/Fill (cont) | | | | | | | | 5 |

Figure 105: CLMS-FIXED message structure: data section

8.3.2 Message elements

A-bit coding (octet 1):

A = "1" address section
A = "0" data section

CLMS header coding (octet 1):

The header coding is different for address sections and data sections. The address section allows three types of message to be defined, a DECT standard message, or, a general alphanumeric message, or, a general bit stream message. The basic structure of the first two messages is the same, but DECT standard messages provide standard codings for the message contents.

CLMS header coding for address section:

| Bits | 3 2 1 | Message type | octet 4 | octet 5 |
|------|-------|----------------|--------------|------------------|
| | 0 0 1 | One section: | Standard | Data |
| | 0 1 0 | Multi-section: | Standard | Length indicator |
| | 0 1 1 | One section: | Bit stream | Data |
| | 1 0 0 | Multi-section: | Bit stream | Length indicator |
| | 1 0 1 | One section: | Alphanumeric | Data |
| | 1 1 0 | Multi-section: | Alphanumeric | Length indicator |

All other values reserved.

CLMS header coding for data section:

| Bits | 3 2 1 | Meaning |
|------|-------|---------------------|
| | n n n | Data section number |

The first data section shall be numbered 000. The following sections shall be numbered in ascending order.

Address (octets 2 and 3 of address section):

The address shall only be derived from a connectionless TPUI:

- address = lowest 16 bits of connectionless TPUI.

NOTE: The CLMS service requires the use of assigned TPUIs. Refer to EN 300 175-6 [5].

Protocol discriminator (octet 4 of address section):

Coding as for octet 3 of <<Bit stream>>

| | | | | | | | | | |
|-------------|----------|----------------------|----------|----------|----------|----------|----------|----------|---------------|
| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
| | 0 | Second Discriminator | | | | | | | 4 |

Figure 106: Format of Protocol Discriminator (PD)

Bits 7 6 5 4 3 2 1 Meaning

0 0 0 0 0 1 DECT Information elements coding

0 0 1 x x x x Distributed Communications

All other values reserved. The Distributed Communications in fact occupies more than one code.

When the value "DECT Information Element Coding" is used the data field shall contain only DECT information elements as coded in the present document. Multiple information elements may be included.

When the value "Distributed Communications" is used the coding of the octets is defined in annex I.

Length indicator (octet 5 of address section if multi-section): this indicates the total length of valid data in bits. The length shall be coded with the natural binary value, and the least significant bit placed in bit position 1.

| | | | | | | | | | |
|-------------|----------|----------|----------|----------|----------|----------|----------|----------|---------------|
| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
| | L8 | L7 | L6 | L5 | L4 | L3 | L2 | L1 | 5 |

Figure 107: Format of Length Indicator (LI)

Each complete data segment contains 32 bits of valid data. Therefore the most significant 3-bits shall indicate the total number of data segments.

Data/Fill (octet 5 of address section if single-section and all data sections):

| | | | | | | | | | |
|-------------|--------------|----------|----------|----------|--------------|----------|----------|----------|---------------|
| Bit: | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | Octet: |
| | Data or Fill | | | | Data or Fill | | | | * |

Figure 108: Format of Data/Fill

Each Data/Fill octet is used to carry the user information. This shall be formatted in accordance with the format indicated in the protocol discriminator octet.

All 8-bit data characters shall always be coded with one character per octet. Multiple characters shall be interpreted in the order of ascending octet numbers. Characters that are originally coded in less than 8-bits shall be padded up to 8-bits as follows:

- the original character is placed in the octet, with the least significant bit in bit position "1", and a unused bit positions are filled with "0".

4-bit data characters shall always be coded with two characters per octet. Multiple characters shall be interpreted in the order of ascending octet numbers, and within each octet the high placed character (bits position 5-8) first.

Fill characters (8-bit or 4-bit as appropriate) shall then be inserted to fill up the final octets.

A complete data segment that contains no valid data (i.e. fill only) shall not be transmitted.

8.3.3 Standard message structures

8.3.3.1 General

DECT standard messages shall only use one of the DECT standard character sets: either 4-bit characters or 8-bit characters. In both cases, the first character of the message shall be used as a message type identifier to define the meaning of the following characters.

8.3.3.2 Messages using 4-bit characters

Table 81: Messages using 4-bit characters

| Message Type | 1st character | 2nd character | Other characters |
|--|---------------|---------------|------------------|
| Tone alert | 0 | 0 to 9 | not allowed |
| Other messages are for further standardization | | | |

Message type 0: tone alert: the second character identifies one of ten possible alerting tones. The use of tones by the FT, and the resulting sound at the PT is not defined in the present document.

8.3.3.3 Messages using 8-bit characters

Table 82: Messages using 8-bit characters

| Message Type | 1st character | 2nd character | Other characters |
|--|---------------|---------------|------------------|
| 8-bit messages are for further standardization | | | |

9 Call Control (CC) procedures

9.1 General

The Call Control (CC) procedures provide mechanisms to support both circuit oriented and packet oriented services. Each independent service is called a "call" and this is controlled by an independent instance of CC. A CC always establishes circuit oriented lower resources to provide the service (i.e. uses the MAC layer connection oriented service). The CC represents a group of procedures covering all aspects of call establishment and release, and also covering a range of Call Related Supplementary Services (CRSS).

The protocol allows for multiple instances of a CC call at both the fixed termination and at the portable termination (for example, a PT may provide two or more simultaneous calls). These multiple instances are assumed to operate completely independently from each other. The possible existence of multiple instances is therefore ignored in the following clauses, which only describe the procedures for a single instance, denoted as the CC entity.

Figure 109 illustrates the states and transitions on the PT side.

Figure 110 illustrates the states and transitions on the FT side.

An alternative description of the CC state transitions is included in annex B. This contains a state transition table, plus a summary of the transition procedures. Annex B is included as a shortform summary. In the event of any discrepancy, the main text (the following clauses) take precedence.

A reliable C-plane DLC link (LAPC) shall be available before any of these CC procedures can operate. The establishment and maintenance of this link is the responsibility of the LCE and is described in clause 14.

NOTE: A "LINK PENDING" state is included in the LCE definition which is used while the LCE is waiting for DLC link establishment to complete. If a CC timer expires whilst in this state, the resulting release should be handled locally.

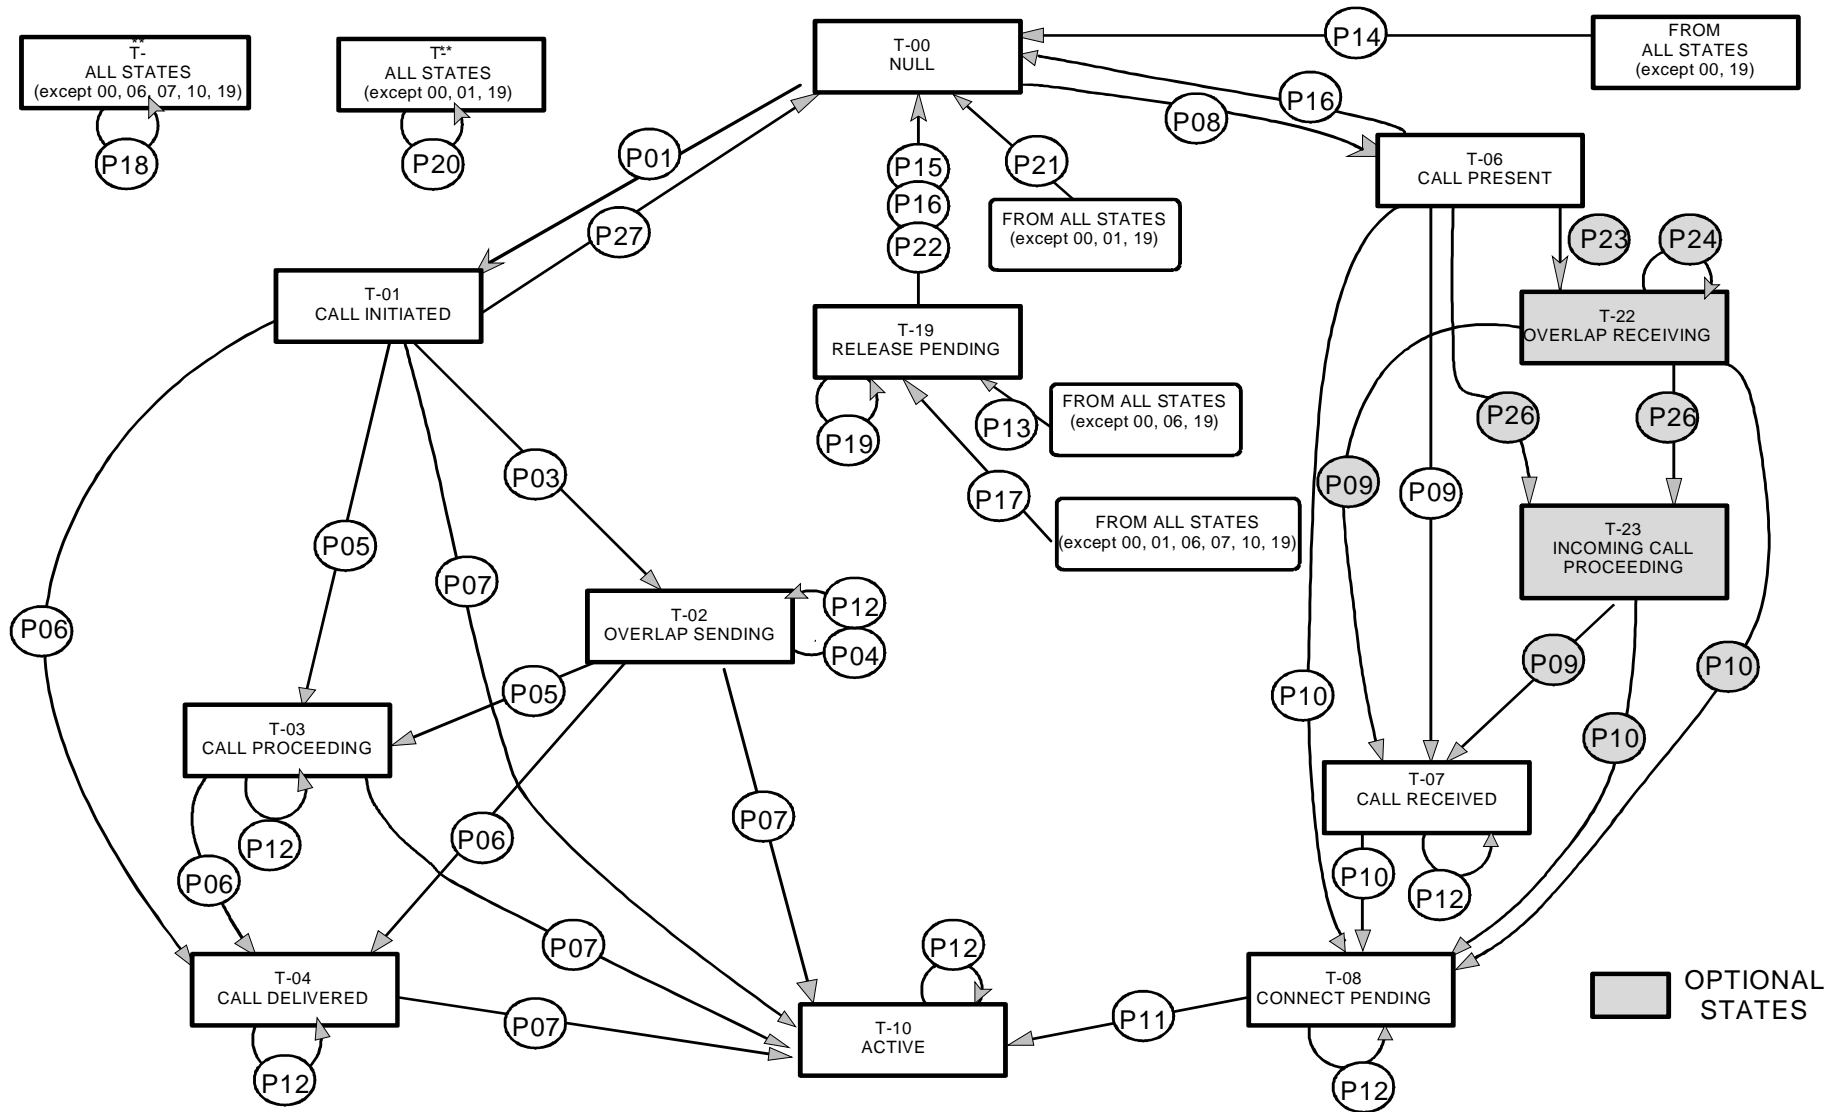


Figure 109: Call control states in the PT

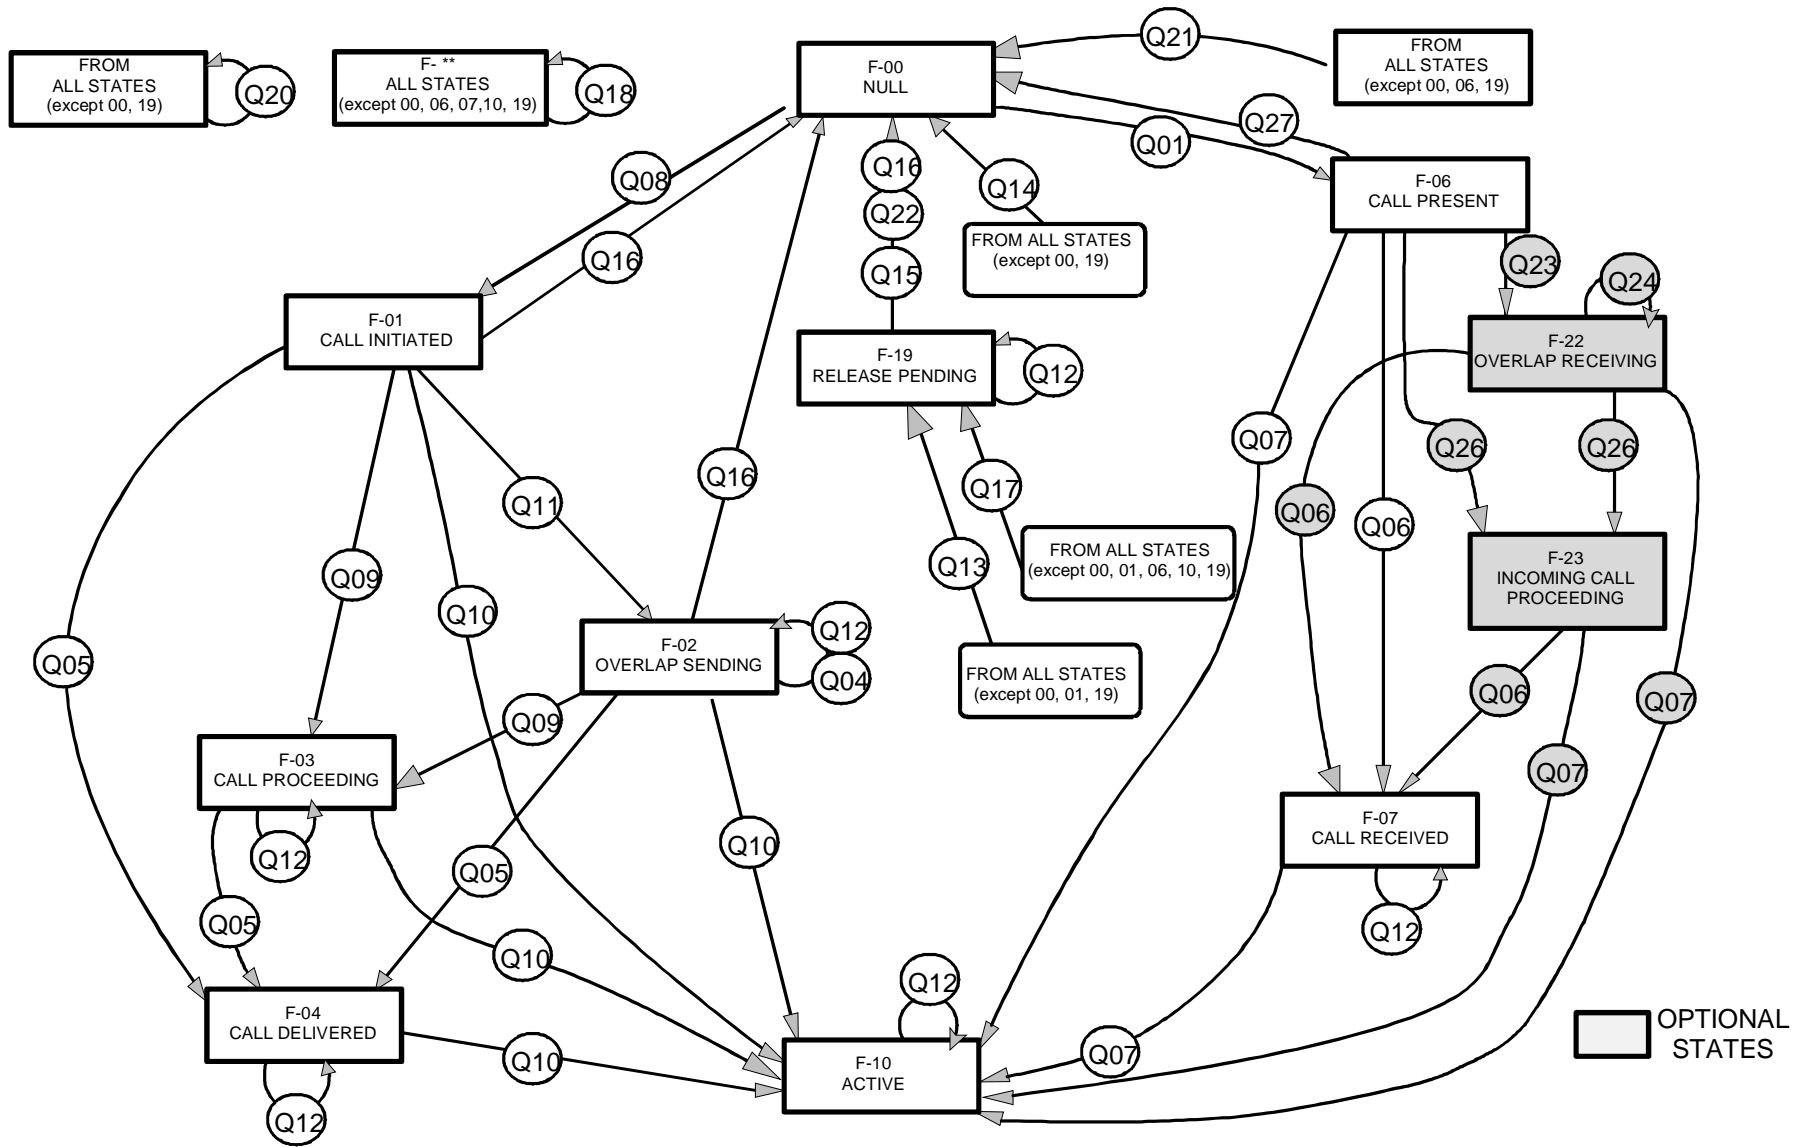


Figure 110: Call control states in the FT

9.2 Call Control (CC) states

9.2.1 States at PT

Central call states.

9.2.1.1 State T-00: "NULL"

No call exists.

9.2.1.2 State T-19: "RELEASE PENDING"

The PT has sent a release message to the FT, but has not received a response.

9.2.1.3 State T-10: "ACTIVE"

- a) The PT user has answered an incoming call;
- b) the PT has received an indication that the FT has connected a PT outgoing call.

PT originated call states (outgoing call).

9.2.1.4 State T-01: "CALL INITIATED"

A PT initiated call has been started, by sending a setup message to the FT.

9.2.1.5 State T-02: "OVERLAP SENDING"

An outgoing call is being established using "OVERLAP SENDING".

9.2.1.6 State T-03: "CALL PROCEEDING"

The PT has received a message from the FT to confirm that all setup information has been received.

9.2.1.7 State T-04: "CALL DELIVERED"

The PT has received a message from the FT that indicates that called party alerting has been started.

PT terminated call states (incoming call).

9.2.1.8 State T-06: "CALL PRESENT"

The PT has received a setup message from the FT, but has not yet responded.

9.2.1.9 State T-07: "CALL RECEIVED"

The PT has sent a message to the FT to report alerting of the user, but the user has not yet responded.

9.2.1.10 State T-08: "CONNECT PENDING"

The PT user has answered the call, but is waiting for a message from the FT giving confirmation of a U-plane connection (assumed to be an end-to-end connection).

9.2.2 States at FT

Central call states.

9.2.2.1 State F-00: "NULL"

No call exists.

9.2.2.2 State F-19: "RELEASE PENDING"

The FT has sent a release message to the PT, but has not received a response.

9.2.2.3 State F-10: "ACTIVE"

- a) The FT has allocated an incoming call to one PT;
- b) the FT has sent a message to the PT reporting connection of an outgoing call (assumed to mean that the called party has answered the outgoing call).

NOTE: The ACTIVE state is typically used for intelligent networks when the connection is completed and for PSTN when the PT goes off hook.

PT originated call states (outgoing call).

9.2.2.4 State F-01: "CALL-INITIATED"

A PT initiated call setup has been started. The FT has received a setup message from the PT, but has not yet replied.

9.2.2.5 State F-02: "OVERLAP SENDING"

A PT initiated call is being established using "OVERLAP SENDING".

NOTE: The OVERLAP SENDING state is typically used when the DECT FT wants to receive more digits from the PT. The {CC-SETUP-ACK} can originally come from the network or just locally from the FT.

9.2.2.6 State F-03: "CALL PROCEEDING"

The FT has sent a message to the PT to confirm that all setup information has been received.

NOTE: The CALL PROCEEDING state is typically used for telling the PT that the connected network is routing the call but has not started to alert.

9.2.2.7 State F-04: "CALL DELIVERED"

The FT has sent a message to the PT reporting that it has received notification that called party alerting has started.

NOTE: The CALL DELIVERED state is typically used for telling the PT that the called party is alerting.

PT terminated call states (incoming call).

9.2.2.8 State F-06: "CALL PRESENT"

The FT has sent a setup message to the PT, but has not yet received a satisfactory response.

9.2.2.9 State F-07: "CALL RECEIVED"

The FT has received a message from the PT to report that it is alerting the user (but the user has not yet responded).

9.2.3 Optional states (PT and FT)

The following states are optional. They are required for incoming calls, when DECT is being used as an intermediate network. In this case, the call is not terminated in the DECT portable termination, and these additional states are used to allow the call establishment procedures to interact with the attached network on the PT side.

9.2.3.1 States T-22 and F-22: "OVERLAP RECEIVING"

An incoming call is being established using "OVERLAP RECEIVING".

9.2.3.2 States T-23 and F-23: "INCOMING CALL PROCEEDING"

The PT has sent a message to the FT to confirm that all setup information has been received.

9.3 Call establishment procedures

9.3.1 PT initiated call establishment (outgoing call)

PT initiated call establishment is started upon receipt of a MNCC_SETUP-req primitive by the CC entity at the PT side (P-CC). This primitive shall specify the type of call required.

9.3.1.1 Call request

The P-CC entity starts the call establishment by sending a {CC-SETUP} message to its peer entity at the FT side (F-CC). This message is submitted to the LCE in the PT, and the P-CC enters "CALL INITIATED" state and starts timer P<CC.03>.

The {CC-SETUP} message shall carry a portable part identity plus a full fixed part identity (the relevant ARI) according to the identity rules given in EN 300 175-6 [5]. The portable part identity used is by default the IPUI, however, the assigned individual TPUI may be used if the FT has indicated that this is allowed. This indication is provided by the <<USE-TPUI>> information element in the {LOCATE-ACCEPT} message.

The {CC-SETUP} message shall contain the <<BASIC-SERVICE>> information element. If this element indicates "default setup attributes" the service shall be defined by the defined default codings given in annex E or in the relevant profile specification when explicitly stated and no further <<IWU-ATTRIBUTES>> or <<CALL-ATTRIBUTES>> elements shall be included. Alternatively, if the service is indicated as "other", the setup message shall also contain the <<IWU-ATTRIBUTES>> element, and optionally the <<CALL-ATTRIBUTES>> element to fully define the required service, such that all the necessary resources can be reserved and installed by the FT and the interworking unit at the FT side (F-IWU).

NOTE 1: The setup message may contain a list of attribute elements when using prioritized list negotiation. Refer to clause 15.2.2.

The PT may include the <<TERMINAL-CAPABILITY>> element in the {CC-SETUP} message. If omitted the last available values (e.g. as received in {LOCATE-REQUEST} or {ACCESS-RIGHTS-REQUEST}) should be assumed. Otherwise the default values shall be assumed.

NOTE 2: The action of a FT in response to an omitted <<TERMINAL-CAPABILITY>> element is not defined in the present document. They should be defined in the relevant profiles specifications based on DECT CI.

Emergency call establishment is described in detail in clause 9.8.

NOTE 3: The messaging call set up should be used for store and forward type of messaging applications.

9.3.1.2 Call accept or reject

Call accept:

Upon receipt of a {CC-SETUP} message, the F-CC shall enter the "CALL INITIATED" state. The F-CC entity shall examine the attributes defined in the {CC-SETUP} message and attempt to fulfil them. If it can meet the request, it shall issue a MNCC_SETUP-ind primitive to the interworking unit at the fixed side (F-IWU).

NOTE 1: Either the F-CC or the F-IWU may reject the call. The F-CC examines the <<CALL-ATTRIBUTES>> and the <<CONNECTION-ATTRIBUTES>> elements, and the F-IWU examines the <<IWU-ATTRIBUTES>> element. The call is only offered to the F-IWU after it has been accepted by the F-CC. The call may also be rejected by the local network.

If the F-IWU accepts the call it is expected to reply with one of the following primitives:

- a) a MNCC_SETUP_ACK-req primitive;
- b) a MNCC_CALL_PROC-req primitive;
- c) a MNCC_ALERT-req primitive;
- d) a MNCC_CONNECT-req primitive.

Upon receipt of one of these primitives, the F-CC shall act according to clauses 9.3.1.3 to 9.3.1.9.

Call reject:

If the F-CC cannot meet any of the setup requests, or if the {CC-SETUP} message contains errors or inconsistencies, or if the F-IWU rejects the call by responding to the MNCC_SETUP-ind primitive with a MNCC_REJECT-req primitive, the FT shall reject the call setup by sending a {CC-RELEASE-COM} message, and shall enter the "NULL" state.

The MNCC_REJECT-req may include a release reason (as provided by the F-IWU) and this should be included in the {CC-RELEASE-COM} message.

Upon receipt of the {CC-RELEASE-COM} message, the PT shall act according to clause 9.5.2.

NOTE 2: Call rejection may also occur as part of exchanged attribute service negotiation. Refer to clause 15.2.3.

Expiry of timer <CC.03>:

Timer P<CC.03> may be restarted by the FT at any time by sending a <<TIMER-RESTART>> information element in a {CC-NOTIFY} message. If timer P<CC.03> expires before a suitable reply (or a restart) is received, the P-CC should immediately reject the call by sending a {CC-RELEASE-COM} message, with the reason set to "timer expiry". It shall then issue a MNCC_REJECT-ind primitive indicating unacknowledged release (cause = local timer expiry) and shall enter the "NULL" state.

9.3.1.3 Selection of lower layer resources

The following procedures shall only be used when using advanced connections. The elements described in this clause shall be omitted when using basic connections, and this omission shall be understood to indicate a basic connection.

The PT should indicate the lower layer resources (DLC U-plane link identifier and MAC connection identifier) by including a <<CONNECTION-IDENTITY>> element in the {CC-SETUP} message. The <<CONNECTION-IDENTITY>> element may be used as well to allocate a number of MAC connection identifiers for connections that are associated with one Broadband data link (see clause 9.4 as well). If this element is included, the FT shall be obliged to use the indicated resources or shall reject the call.

NOTE 1: The attributes of the indicated connection may still be undefined (i.e. connection type "unknown") at this point. The attributes are subsequently defined by the MAC establishment procedures (PT initiated).

Alternatively <<CONNECTION-ATTRIBUTES>> elements may be used to postpone the establishment (or modification) of suitable connection(s) until the setup is accepted (e.g. if the PT is attempting to setup a second call using the C-plane resources of an existing call). In this event, the PT may include one or more <<CONNECTION-ATTRIBUTES>> elements in the {CC-SETUP} message; one element for each postponed connection. Each element contains a valid Logical Connection Number assignment (see EN 300 175-4 [4]) if it refers to an established connection (i.e. a postponed modification).

If the <<CONNECTION-IDENTITY>> element is omitted, or if it contains one or more connection identities that are indicated as "unknown" (thereby indicating that the link associations are not defined) the FT shall nonetheless reserve all of the DLC resources upon accepting the call. The FT shall then associate these DLC resources (U-plane links) to the connections by using all of the PT defined associations, and adding FT defined associations for the remaining (unknown) link associations. It shall then confirm the complete set of associations by including a <<CONNECTION-IDENTITY>> element in the first response message (i.e. {CC-SETUP-ACK}, {CC-CALL-PROC}, {CC-ALERTING} or {CC-CONNECT}). This element may be omitted if all associations have been defined by the PT in the {CC-SETUP} message.

NOTE 2: The FT may also be required to modify existing connections as indicated by the <<CONNECTION-ATTRIBUTES>> elements. In this event, the <<CONNECTION-IDENTITY>> response indicates that this modification has been initiated.

NOTE 3: "Unknown" PT assignments are intended to allow FT choice when the indicated resources require FT modification of existing connections. "Unknown" assignments may also be used in other cases, provided that all possible associations are acceptable for the PT.

Upon receipt of the first message from the FT indicating acceptance of the setup, the PT shall immediately establish all remaining connections (or modify existing connections) and shall associate all remaining U-plane links to complete the required service.

NOTE 4: In all cases, it is the responsibility of the PT to establish any new connections.

If any of the required resources are not available, the FT shall reject the call.

Both the <<CONNECTION-IDENTITY>> and the <<CONNECTION-ATTRIBUTES>> elements shall be omitted from all messages for a call establishment relating to a basic connection. If this basic connection is not already established when the {CC-SETUP} message is received, the call shall be rejected.

After the lower resources are identified the NWK layers at both sides should inform the DLC for the result sending a DL_SERVICE_MOD primitive.

9.3.1.4 Connection of U-plane

The PT is not required to request the LLME to connect its receive U-plane unless it receives a message containing the <<PROGRESS-INDICATOR>> element indicating cause no. 8 ("In-band information or appropriate pattern is now available in band"). The FT should not assume that the PT has connected the U-plane unless this message has been sent.

NOTE: If this <<PROGRESS-INDICATOR>> element is not used, the PT may delay connection of the U-plane until receipt of the {CC-CONNECT} message. See clause 9.3.1.8.

9.3.1.5 Overlap sending

"OVERLAP SENDING" is indicated if the F-CC receives a MNCC_SETUP_ACK-req primitive.

Upon receipt of this primitive, the F-CC shall send a {CC-SETUP-ACK} message to the P-CC. It shall then start timer F<CC.01> and shall enter the "OVERLAP SENDING" state. In this state it is waiting for a {CC-INFO} message (or messages) from the P-CC.

Upon receipt of the {CC-SETUP-ACK} message, the P-CC shall stop timer P<CC.03>, shall optionally start timer P<CC.04>. It shall then issue a MNCC_SETUP_ACK-ind primitive and shall enter the "OVERLAP SENDING" state.

The remainder of the setup information should now be supplied by the PP application in a series of one or more MNCC_INFO-req primitives. The P-CC shall send this information in one or more {CC-INFO} messages.

The called party number shall be supplied by the PP application in one of two ways:

- en-bloc sending, where the called party number is sent in a single variable length <<CALLED-PARTY-NUMBER>> information element;
- piecewise sending, where the called party number is sent in a series of fixed or variable length <<"KEYPAD">> information elements, contained in one or more messages (one <<"KEYPAD">> element per message).

Only one method of sending shall be used within any one call.

NOTE 1: The present document allows piecewise sending to include more than one character in each <<"KEYPAD">> information element.

NOTE 2: The length of the called party number is defined by the length of the <<CALLED-PARTY-NUMBER>> information element when this is used. If <<"KEYPAD">> information elements are used the length definition is specific to the F-IWU: it may be undefined, or it may be defined by the <<SENDING-COMPLETE>> information element.

Upon receipt of a {CC-INFO} message, the F-CC shall immediately forward the contents to the F-IWU in a MNCC_INFO-ind primitive, and shall restart timer F<CC.01>.

Call reject:

If the F-CC cannot meet any of the setup requests whilst in the "OVERLAP SENDING" state, or if a {CC-INFO} message contains errors or inconsistencies, or if the F-IWU rejects the call by responding to a MNCC_INFO-ind primitive with a MNCC_REJECT-req primitive, the FT shall reject the call setup by sending a {CC-RELEASE-COM} message, and shall enter the NULL state.

The MNCC_REJECT-req should include a release reason (as provided by the F-IWU) and this should be included in the {CC-RELEASE-COM} message.

Upon receipt of the {CC-RELEASE-COM} message, the PT shall act according to clause 9.5.2.

If timer F<CC.01> expires before a suitable primitive is received, the F-CC should immediately release the call using the release procedures defined in clause 9.5.1. The {CC-RELEASE} message should contain the reason "TIMER-EXPIRY".

9.3.1.6 Call proceeding

Upon receipt of the MNCC_CALL_PROC-req primitive, the F-CC shall stop timer F<CC.01> (if running), shall enter the "CALL PROCEEDING" state and shall send a {CC-CALL-PROC} message to the P-CC. It shall then start timer F<CC.04> (if implemented).

Upon receipt of the {CC-CALL-PROC} message, the P-CC shall stop timer P<CC.03> if running and should start timer P<CC.04> (if implemented). It shall then issue a MNCC_CALL_PROC-ind primitive and shall enter the "CALL PROCEEDING" state.

The F-IWU may also issue this primitive without receiving a complete called party number. In this event, any (subsequent) dialling shall only appear in <<"KEYPAD">> information elements. For example, in the case of queue management, see clause 10.6.2.

9.3.1.7 Call confirmation

When the F-CC receives a MNCC_ALERT-req primitive (usually meaning that user alerting has been initiated at the called destination), the F-CC may send a {CC-ALERTING} message to the P-CC. This message shall only be sent if the U-plane resources are fully installed. The F-CC shall stop timer F<CC.01> if running and shall start timer F<CC.04> (if implemented). It shall then enter the "CALL DELIVERED" state.

Upon receipt of a {CC-ALERTING} message, the P-CC shall stop timer P<CC.03> if running, and should start timer P<CC.04> if not running and if implemented. It shall then issue a MNCC_ALERT-ind primitive and shall enter the "CALL DELIVERED" state.

9.3.1.8 Call connection

Upon receiving a MNCC_CONNECT-req primitive (usually meaning that the call has been accepted by the destination), the F-CC shall request confirmation of the U-plane connection from the F-LLME. When the U-plane is confirmed, it shall stop timer F<CC.01> if running and shall send a {CC-CONNECT} message to the P-CC. It shall then enter the "ACTIVE" state.

On receipt of the {CC-CONNECT} message the P-CC shall request confirmation of the U-plane connection from the P-LLME. When the U-plane connection is confirmed, the P-CC shall stop timer P<CC.03> if running, stop timer P<CC.04> if used, and enter the "ACTIVE" state. It shall then issue a MNCC_CONNECT-ind primitive.

9.3.1.9 Expiry of timer <CC.04>

Timer P<CC.04> may be restarted by the FT at any time by sending a <<TIMER-RESTART>> information element in a {CC-NOTIFY} message. If timer P<CC.04> expires, the P-CC shall immediately release the call using the procedures described in clause 9.5.1.

Equally, if timer F<CC.04> expires, the F-CC shall immediately release the call using the procedures described in clause 9.5.1.

NOTE: The use of timer <CC.04> is optional for both PT and FT.

9.3.2 FT initiated call establishment (incoming call)

FT initiated call establishment is started upon receipt of a MNCC_SETUP-req primitive by the CC entity at the FT side (F-CC).

9.3.2.1 Call request

The F-CC entity starts the call establishment by sending a {CC-SETUP} message to its peer entity at the PT side (P-CC). This message is submitted to the LCE in the FT, and the F-CC enters "CALL PRESENT" state and starts timer F<CC.03>.

For individual calls, the {CC-SETUP} message shall carry a portable part identity plus a full fixed part identity (the relevant ARI) according to the identity rules given in EN 300 175-6 [5]. The portable part identity used is by default the IPUI, however, the assigned individual TPUI may be used if the PT used the assigned individual TPUI in the {LCE-PAGE-RESPONSE} message.

For group calls the {CC-SETUP} message shall carry either one portable part identity (IPUI or individual TPUI according to the same rules as for individual calls) or one group identity (one group TPUI) plus a full fixed part identity (the relevant ARI).

The {CC-SETUP} message shall contain the <<BASIC-SERVICE>> information element. If this element indicates "default service attributes" the service shall be defined by the defined default codings given in annex E and no further <<IWU-ATTRIBUTES>> or <<CALL-ATTRIBUTES>> elements shall be included. Alternatively, if the service is indicated as "other", the setup message shall also contain the <<IWU-ATTRIBUTES>> element, and optionally the <<CALL-ATTRIBUTES>> element to fully define the required service, such that all the necessary resources can be reserved and installed by the PT.

The following call classes are not applicable for incoming call: emergency call, external handover and service call.

NOTE: The setup message may contain a list of attribute elements when using prioritized list negotiation. Refer to clause 15.2.2.

9.3.2.2 Call accept or reject

Call accept:

Upon receipt of a {CC-SETUP} message the P-CC shall enter the "CALL PRESENT" state. The P-CC entity shall examine the attributes defined in the {CC-SETUP} message and attempt to fulfil them. If it can meet the request, it shall issue a MNCC_SETUP-ind primitive.

NOTE: Either the P-CC or an IWU application may reject the call. The P-CC examines the <<CALL-ATTRIBUTES>> and the <<CONNECTION-ATTRIBUTES>> elements, and the PP-IWU examines the <<IWU-ATTRIBUTES>> element. The call is only offered to the PP-IWU after it has been accepted by the P-CC.

If the PP-IWU accept the call, they are expected to respond to the P-CC with one of the following primitives.

For normal calls:

- a) a MNCC_ALERT-req primitive;
- b) a MNCC_CONNECT-req primitive.

For calls using "OVERLAP RECEIVING":

- c) a MNCC_SETUP_ACK-req primitive;
- d) a MNCC_CALL_PROC-req primitive.

Upon receipt of one of these primitives, the P-CC shall act according to clauses 9.3.2.3 to 9.3.2.8.

Call reject:

If the PT cannot meet any of the demands, or if the {CC-SETUP} message contains errors or inconsistencies, or if a MNCC_REJECT-req primitive is received in response to the MNCC_SETUP-ind primitive (thus indicating rejection by the PP-IWU), the P-CC entity shall reject the call setup by sending a {CC-RELEASE-COM} message, and shall enter the "NULL" state.

The MNCC_REJECT-req should include a release reason (as provided by the F-IWU) and this should be included in the {CC-RELEASE-COM} message.

Upon receipt of the {CC-RELEASE-COM} message, the FT shall act according to clause 9.5.2.

Expiry of timer <CC.03>:

If timer F<CC.03> expires before a suitable reply is received, the F-CC shall immediately reject the call by sending a {CC-RELEASE-COM} message, with the reason set to "TIMER-EXPIRY". It shall then issue a MNCC_REJECT-ind primitive indicating unacknowledged release (cause = local timer expiry) to the F-IWU and shall enter the "NULL" state.

9.3.2.3 Selection of lower layer resources

The following procedures shall only be used for advanced connections. These elements shall be omitted when using basic connections, and this omission shall be understood to indicate a basic connection.

The FT may indicate the lower layer resources (DLC U-plane link identifier and MAC connection identifier) by including a <<CONNECTION-IDENTITY>> element in the {CC-SETUP} message. The <<CONNECTION-IDENTITY>> element may be used as well to allocate a number of MAC connection identifiers for connections that are associated with one Broadband data link (see clause 9.4 as well). If this element is included, the PT shall be obliged to use the indicated resources or shall reject the call. The FT may also include the <<CONNECTION-ATTRIBUTES>> element to indicate other needed connections.

NOTE 1: The attributes of the indicated connection may still be undefined (i.e. connection type "unknown") at this point. The attributes are subsequently be defined by the MAC establishment procedures (FT initiated).

If the <<CONNECTION-ATTRIBUTES>> element indicates a connection identifier as "unknown", this indicates that the PT should immediately initiate the establishment of this connection prior to sending the first response message.

NOTE 2: The <<CONNECTION-ATTRIBUTES>> may also be used to indicate an existing connection that requires a bandwidth modification by the PT.

If the <<CONNECTION-IDENTITY>> element is omitted, or if it contains one or more connection identities that are indicated as "unknown" (thereby indicating that the link associations are not defined) the PT shall nonetheless reserve all of the DLC resources upon accepting the call. The PT shall then associate these DLC resources (U-plane links) to the connections by using all of the FT defined associations, and adding PT defined associations for the remaining (unknown) link associations. It shall then confirm the complete set of associations by including a <<CONNECTION-IDENTITY>> element in the first response message (i.e. {CC-ALERTING} or {CC-CONNECT}). This element may be omitted if all associations have been defined by the FT in the {CC-SETUP} message.

If suitable resources are not available and cannot be established the PT shall reject the call.

Both the <<CONNECTION-IDENTITY>> and the <<CONNECTION-ATTRIBUTES>> elements shall be omitted from all messages for a call establishment relating to a basic connection. If this basic connection is not already established when the {CC-SETUP} message is received, the call shall be rejected.

After the lower resources are identified the NWK layers at both sides should inform the DLC for the result sending a DL_SERVICE_MOD primitive.

9.3.2.4 Connection of U-plane

The PT is not required to request the LLME to connect its receive U-plane unless it receives a message containing the <<PROGRESS-INDICATOR>> element indicating cause no. 8 ("in-band information or appropriate pattern is now available in band"). The FT should not assume that the PT has connected the U-plane unless this message has been sent.

NOTE: If this <<PROGRESS-INDICATOR>> element is not used, the PT may delay connection of the U-plane until receiving of the {CC-CONNECT-ACK} message. See clause 9.3.2.8.

9.3.2.5 Overlap receiving

These procedures are optional, and shall only apply to PTs that implement this option.

9.3.2.6 Call proceeding

For FT initiated calls, the setup message should normally contain sufficient information to complete the call. However the F-CC may also send any supplementary information (e.g. <<"DISPLAY">> information elements) in a subsequent {CC-INFO} message (or messages) in response to MNCC_INFO-req primitives from the F-IWU.

9.3.2.7 Call confirmation

Confirmation of the call is indicated when a MNCC_ALERT-req primitive is received at the P-CC (usually indicating that user alerting has been initiated). Upon receipt of this primitive, the P-CC shall send a {CC-ALERTING} message to the F-CC and shall enter the "CALL RECEIVED" state.

The F-CC, upon receipt of the {CC-ALERTING} message shall stop timer F<CC.03> and shall start timer F<CC.04> (if implemented). It shall then issue a MNCC_ALERT-ind primitive and shall enter the "CALL RECEIVED" state.

Whilst in the "CALL-RECEIVED" state, the FT may send further information to the PT in one or more {CC-INFO} messages in response to further MNCC_INFO-req primitives. The PT should issue the contents of all these messages using MNCC_INFO-ind primitives.

NOTE: Cadence following of the PT alerting may be achieved by sending a sequence of <<SIGNAL>> elements in a series of {CC-INFO} messages.

9.3.2.8 Call connection

Connection of the call is indicated when an MNCC_CONNECT-req primitive is received by the P-CC (usually indicating that the call has been accepted by the PT user). Upon receipt of this primitive, the P-CC should request confirmation of the U-plane connection from the LLME and shall send a {CC-CONNECT} message to the F-CC. It shall then start timer P<CC.05> and enter the "CONNECT PENDING" state.

NOTE: If the U-plane is connected the receive path may be muted.

On receipt of the {CC-CONNECT} message the F-CC shall stop timer F<CC.03> if running and shall stop timer F<CC.04> if running (and if implemented). It then issues a MNCC_CONNECT-ind primitive to the F-IWU. On receipt of a MNCC_CONNECT-res primitive the FT shall request confirmation of the U-plane connection from the LLME and when confirmed it shall return a {CC-CONNECT-ACK} message to the PT and shall enter the "ACTIVE" state.

Upon receipt of the {CC-CONNECT-ACK} message the P-CC shall request the U-plane connection from the P-LLME, (if not already connected) and when confirmed it shall stop timer P<CC.05>, It then issues a MNCC_CONNECT-cfm primitive, and shall enter the "ACTIVE" state.

If timer P<CC.05> expires, the P-CC shall immediately release the call using the normal procedure described in clause 9.5.1.

9.3.2.9 Sending of <<TERMINAL-CAPABILITY>>

The PT may include the <<TERMINAL-CAPABILITY>> element in its first response message. If omitted the last available values (e.g. as received in {LOCATE-ACCEPT} or {ACCESS-RIGHTS-REQUEST}) should be assumed. Otherwise the default values shall be assumed.

NOTE: The action of a FT in response to an omitted <<TERMINAL-CAPABILITY>> element is not defined in the present document. They should be defined in the relevant profiles specifications based on DECT CI.

9.3.2.10 Expiry of timer <CC.04>

If timer F<CC.04> expires, the F-CC shall immediately release the call using the procedures described in clause 9.5.1.

NOTE: The use of timer <CC.04> is optional.

9.4 Call information procedures

While in the "ACTIVE" state, the P-CC and F-CC shall immediately transfer any information received in MNCC_INFO-req primitives, using a series of one or more {CC-INFO} messages. Upon receipt of a {CC-INFO} message, the peer CC entity shall immediately issue the contents in a MNCC_INFO-ind primitive.

If the call requires usage of a Broadband data link and the <<CONNECTION-IDENTITY>> element to allocate a number of MAC connection identifiers for connections that are associated with this Broadband data link was not sent with the {CC-SETUP} it shall be sent here. As the call information procedure takes place when a first connection has already been established, the sending entity shall include the assigned to this connection LCN as <Connection identity 1> and shall allocate one or two additional LCNs to be used for one or two additional connections respectively depending on the service requirements for the Broadband link. The receiving site shall indicate the acceptance of the allocated connection identities by submitting the same <<CONNECTION-IDENTITY>> element in opposite direction.

Service change procedures during the call information phase are described in clause 9.6.

9.5 Call release procedures

9.5.1 Normal call release

The call release procedures may be started by the CC entity at either side at any time, upon receipt of a MNCC_RELEASE-req primitive or as a result of timer expiry as described in clause 9.3.

NOTE 1: A MNCC_RELEASE-req primitive is an illegal response to a call setup. The following normal call release procedure is not followed when responding to a call setup. A FT in the "CALL INITIATED" or "OVERLAP SENDING" state responds as though rejecting the call setup and should follow the procedures defined in clauses 9.3.1.2 and 9.3.1.5 for PT initiated calls. A PT in the "CALL PRESENT" state responds as though rejecting the call setup and should follow the procedures defined in clause 9.3.2.2 for FT initiated calls.

To initiate a normal release, the starting entity sends a {CC-RELEASE} message, starts timer <CC.02>, and enters the "RELEASE PENDING" state. The release message may include an information element giving the reason for the release, if no reason is given "normal" release should be assumed.

Upon receipt of the {CC-RELEASE} message, the accepting side shall issue a MNCC_RELEASE-ind primitive to the IWU. Acceptance of the release by the IWU is indicated by a MNCC_RELEASE-res primitive. Upon receipt of this response, the CC shall send a {CC-RELEASE-COM} message. It shall then release all resources associated with the call and enter the "NULL" state.

Upon receipt of the {CC-RELEASE-COM} reply the initiating side shall issue a MNCC_RELEASE-cfm primitive indicating normal acknowledged release (cause = peer message). It shall then release all resources, stop timer <CC.02>, and enter the "NULL" state.

If timer <CC.02> expires before the receipt of a {CC-RELEASE-COM} message, the initiating side should immediately send a {CC-RELEASE-COM} message. It should then issue a MNCC_RELEASE-cfm primitive indicating an unacknowledged release (cause = local timer expiry) and should release all resources and enter the "NULL" state.

Prior to issuing the MNCC_RELEASE-res primitive, the responding side may submit a small number of MNCC_INFO-req primitives (thereby invoking {CC-INFO} messages). If a {CC-INFO} message is received by the initiating entity while in the "RELEASE PENDING" state it shall be indicated with a MNCC_INFO-ind primitive.

On receipt of MNCC_INFO-req primitive, when in F-19 state, the FT shall issue a {CC-INFO} message (e.g. thereby acknowledging supplementary services requested beforehand by the PT).

NOTE 2: The {DISCONNECT} message used by EN 300 403-1 [8] has not been introduced. However, the normal call procedure provides a similar function by allowing limited information transfer to the release initiating entity.

Both sides shall report the completion of the release of the call to their respective LCEs. This report shall be given immediately after sending the last message, the LCE shall issue the final message to the DLC before releasing the lower layer resources.

NOTE 3: If a "partial" release has been indicated in the <<RELEASE-REASON>> information element (implying that a follow-on call is expected) the CC should request a delayed release from the LCE. In this event the link should be retained for a few seconds as described in clause 14.2.7.

9.5.2 Abnormal call release

Abnormal release is indicated by the unexpected receipt of a {CC-RELEASE-COM} message (i.e. without a prior transmission of a {CC-RELEASE} message). This may occur in any state (except for the "NULL" or "RELEASE PENDING" states). An abnormal release can also be invoked by the receipt of an MNCC_REJECT-req primitive in the "RELEASE PENDING" state.

NOTE: The IWU should issue this primitive only in exceptional cases, e.g. when a RELEASE message is received from the Local network after a normal MNCC_RELEASE-req primitive has been issued or comparable exceptional cases occur inside the PP.

Upon receipt of the unexpected {CC-RELEASE-COM} message the CC entity shall issue a MNCC_REJECT-ind primitive to indicate abnormal release (cause = peer message). It shall then release all resources, stop all timers, and enter the "NULL" state.

Upon receipt of the MNCC_REJECT-req primitive, the CC entity shall stop timer <CC.02>, send a {CC-RELEASE-COM} message, release all resources and enter the "NULL" state.

Both sides shall report the completion of the release of the call to their respective LCEs. This report shall be given immediately after sending the last message, the LCE shall issue the final message to the DLC before releasing the lower layer resources.

9.5.3 Release collisions

A release collision occurs when both sides of a call issue a {CC-RELEASE} message at the same time, such that at least one of these messages is received by a CC entity that is already in the "RELEASE PENDING" state.

If either CC entity receives a {CC-RELEASE} message, while in the "RELEASE PENDING" state, the normal release procedure is not followed by that CC entity. In this event, the CC entity shall stop timer <CC.02> and shall issue a MNCC_RELEASE-cfm primitive indicating normal acknowledged release (cause = peer message). It shall report this release to the LCE, and enter the "NULL" state.

9.6 Service change procedures

9.6.1 General

When in the "ACTIVE" state, service change procedures may be used to modify some of the existing service characteristics. This may include modification of the existing MAC connection(s) and/or the association of the call to a new MAC connection and/or IWU attributes.

A service change may be indicated by the receipt of a MNCC-MODIFY-req primitive. Upon receipt of this primitive, the initiating CC entity sends a {CC-SERVICE-CHANGE} message to request the change and starts timer <CC.06>. The {CC-SERVICE-CHANGE} message shall contain a complete description of the new (requested) service using the <<SERVICE-CHANGE-INFO>>.

NOTE 1: The <<SERVICE-CHANGE-INFO>> provides codings for a set of standard service changes. Complex service changes (in particular, a switch between 2 different service mappings) may be achieved using a combination of the suspend and resume.

Upon receipt of the {CC-SERVICE-CHANGE} message, the receiving CC entity shall attempt to meet the revised proposal. If the change is possible, and if no change of the IWU attributes is requested, the receiving entity shall immediately return a {CC-SERVICE-ACCEPT}. If the change is not acceptable, the receiving entity shall respond with a {CC-SERVICE-REJECT} message.

The changes required may concern the IWU in which case upon receipt of the {CC-SERVICE-CHANGE} message, the accepting side shall issue a MNCC_MODIFY-ind primitive to the IWU. Acceptance of the change by the IWU is indicated by a MNCC_MODIFY-res primitive. Upon receipt of this response, the CC shall send a {CC-SERVICE-ACCEPT} if the change was accepted by the IWU or {CC-SERVICE-REJECT} message if the service change was rejected.

Either the CC or the IWU may reject the call. The CC examines the <<CALL-ATTRIBUTES>> and the <<CONNECTION-ATTRIBUTES>> elements, and the IWU examines the <<IWU-ATTRIBUTES>> element. The call is only offered to the IWU after it has been accepted by the CC, i.e. changes not relevant to IWU are possible.

Upon receipt of the {CC-SERVICE-ACCEPT} or the {CC-SERVICE-REJECT} message the initiating CC entity shall stop timer <CC.06>. If timer <CC.06> expires before the receipt of a {CC-SERVICE-ACCEPT} or a {CC-SERVICE-REJECT} message, the initiating side shall consider the service change procedure as failed and issue a MNCC-MODIFY-cfm primitive indicating failure.

The {CC-SERVICE-CHANGE} message may specify the master side for activation of the proposed change at the MAC layer. This shall only apply if the change may be initiated from either side, in some cases the choice of master is implicit in the change.

NOTE 2: Service changes that involve modification of an asymmetric MAC connection or change of the modulation scheme can only be initiated, at MAC layer, from one side. In these cases the master side is defined in EN 300 175-3 [3].

If the master is indicated as "receiving side", the receiving entity shall immediately activate the MAC layer changes after sending the {CC-SERVICE-ACCEPT} message. If the master is indicated as "sending side", the initiating entity shall activate the change immediately after receiving the {CC-SERVICE-ACCEPT} message.

All other changes shall be independently invoked immediately after sending or receiving the {CC-SERVICE-ACCEPT} message. Following completion of all changes, the initiating entity shall issue a MNCC-MODIFY-cfm primitive indicating success and the receiving entity shall issue a MNCC-MODIFY-ind primitive.

NOTE 3: Changes undertaken by the receiving CC without the knowledge of the IWU may result in the need for changes to the IWU attributes. After receiving the MNCC-MODIFY-ind the IWU may initiate a new service change procedure.

Service change rejection, as indicated by the sending and receipt of a {CC-SERVICE-REJECT} message, shall cause no immediate action at either side. The initiating entity shall issue a MNCC-MODIFY-cfm primitive indicating failure.

After the lower resources are agreed the NWK layers at both sides should inform the DLC for the result sending a DL_SERVICE_MOD primitive.

9.6.2 Bandwidth changes (including reversals)

The following procedures shall only be used for advanced connections.

Bandwidth changes shall be defined as changes that may be realized by modification of the existing MAC connection or connections. The <<CONNECTION-ATTRIBUTES>> element (or a list of elements) shall always be included to define the new connection bandwidths.

Bandwidth changes may be combined with establishment of new connections and/or rerouting of links by also including the <<CONNECTION-IDENTITY>> element to define the new associations. See also clause 9.6.3.

The special case of connection reversal shall be identified using the reserved coding. Both the <<CONNECTION-ATTRIBUTES>> element and the <<CONNECTION-IDENTITY>> elements may be included to specify the new connection bandwidths and/or associations. If these elements are omitted, the reversal shall be understood to apply to all relevant connections.

9.6.3 Service rerouting

The following procedures shall only be used for advanced connections.

A {CC-SERVICE-CHANGE} message may alternatively request a rerouting of the DLC U-plane elements or remove allocated connection identities in the case of broadband data links. This should only be used for packet services. The <<CONNECTION-IDENTITY>> element shall always be included to indicate the proposed connections.

The old (dis-associated) MAC connection may be released or may be maintained following an agreed rerouting. This decision shall be indicated in the <<SERVICE-CHANGE-INFO>> element. A maintained connection shall be immediately available for reuse, following completion of the service change procedure.

This procedure may be combined with a bandwidth change as described in clause 9.6.2.

9.6.4 Service suspension and resumption

The following procedures shall only be used for advanced connections.

A {CC-SERVICE-CHANGE} message may alternatively request a suspension or resumption of the DLC U-plane elements. This should only be used for packet services.

The <<CONNECTION-IDENTITY>> element may be omitted for a suspend request, in which case the suspend shall be understood to apply to all relevant U-plane elements.

The <<CONNECTION-IDENTITY>> element shall always be included in a resume request to indicate the proposed connections. The resume request may also include <<CONNECTION-ATTRIBUTES>> elements to request establishment of new connections or modification of existing connections according to the setup procedures defined in clauses 9.3.1.3 (PT initiated) or 9.3.2.3 (FT initiated). If new connections and/or associations are required as part of the resume, these shall be confirmed in the {CC-SERVICE-ACCEPT} message using the <<CONNECTION-IDENTITY>> element as defined in clauses 9.3.1.3 or 9.3.2.3.

The associated MAC connection may be released or may be maintained following an agreed suspension. This decision shall be indicated in the <<SERVICE-CHANGE-INFO>> element. A maintained connection shall be immediately available for reuse, following completion of the service change procedure.

9.6.5 Modulation scheme change

A {CC-SERVICE-CHANGE} message may request change into the modulation scheme used at the Physical layer. This should only be used for packet services.

The <<SERVICE-CHANGE-INFO>> element shall indicate "Modulation scheme change" and the <<CONNECTION-ATTRIBUTES>> information element shall be included to identify the exact details of the new modulation to be used.

The modulation scheme change can be combined with Bandwidth modification, see clause 9.6.2.

9.7 Packet mode procedures

9.7.1 General

The following procedures shall only be used for advanced connections.

This clause describes the use of the CC procedures to offer a packet mode service.

The CC service may be accessed in one of two modes:

- a) permanent access;
- b) demand assigned access.

For permanent access, the resources of all layers remain allocated. For demand assigned access the lower layer resources (MAC and physical layers) may be released during periods of inactivity using the suspend and resume procedures.

9.7.2 PT initiated access

For outgoing data calls, the user shall decide whether a circuit switched or packet switched service is required. If circuit switched access is required (case A) the normal procedures defined in clause 9.3. shall apply. The <<IWU-ATTRIBUTES>> information element shall be set appropriately.

If packet switched access is required (case B) the procedures defined in this clause shall apply.

NOTE: The service requested may not be available. The FT will clear a request for unsupported services by sending a {CC-RELEASE-COM} message, with the reason set to "service not implemented".

Packet switched PT initiated access shall use the standard CC procedures with the following exceptions:

- a) the procedures for overlap sending shall not apply;
- b) the procedures for call proceeding shall not apply;
- c) the procedures for call confirmation apply as follows:
 - upon accepting the service requested in the {CC-SETUP} message, the FT shall return a {CC-CONNECT} message to the PT and shall enter the "ACTIVE" state;
 - the {CC-CONNECT} message shall confirm installation of the requested U-plane entity;
 - upon receipt of the {CC-CONNECT} message the PT shall enter the "ACTIVE" state and shall issue a MNCC_CONNECT-ind primitive.

9.7.3 FT initiated access

For incoming data calls, the IWU shall decide whether a circuit switched or packet switched service is required. If circuit switched access is required (case A) the normal procedures defined in clause 9.3 shall apply. The <<IWU-ATTRIBUTES>> information element shall be set appropriately.

If packet switched access is required (case B) the procedures defined in this clause shall apply.

NOTE: The requested service may not be available. The PT will clear a request for unsupported services by sending a {CC-RELEASE-COM} message, with the reason set to "service not implemented".

Packet switched FT initiated access shall use the standard CC procedures with the following exceptions:

- a) the procedures for overlap receiving shall not apply;
- b) the procedures for call alerting may apply, but the receipt of a {CC-ALERTING} message shall not cause the FT to issue a MNCC_ALERT-ind primitive.

9.7.4 Packet mode suspend and resume

9.7.4.1 General

A packet mode call may optionally be suspended. The suspend procedure allows the service attributes to be reserved such that the call can be resumed more rapidly.

The suspend and resume shall use two independent procedures:

- C-plane suspend and resume, under control of the LCE;
- U-plane suspend and resume, under control of the LLME.

These procedures may be invoked independently, once the relevant call is in the "ACTIVE" state.

9.7.4.2 C-plane suspend and resume

The CC entity may request the LCE to suspend a C-plane link at any time after reaching the "ACTIVE" state. No further messages should be submitted for that link as these will invoke an immediate resumption of the link.

NOTE: The DLC suspend and resume procedures are managed by the LCE. In the case of Class A operation, all resources associated with the link are released (i.e. suspension is equivalent to release). In the case of Class B operation, all MAC and physical layer resources are released, but the DLC C-plane resources are preserved. This allows for the link to be restarted with Class B operation.

9.7.4.3 U-plane suspend and resume

U-plane suspend and resume shall use the service change procedures as described in clause 9.6. Any U-plane DLC instance may be suspended, provided that all NWK layer resources (in particular the CC transaction identifier) are preserved. A suspension shall always suspend all of the U-plane resources associated with the indicated CC instance (all resources related to the indicated TI).

Following acceptance of a service change indicating suspension of a service, all of the relevant U-plane resources shall be immediately suspended, all resources shall be preserved and all timers shall be stopped. Any associations to MAC connections shall then be removed.

Following acceptance of a service change indicating resumption of a service, the relevant U-plane resources shall be reassociated to a suitable open MAC connection. The U-plane operations shall then be resumed and all timers shall be restarted (and reset).

NOTE: The state variables of the U-plane link may be reset as part of link resumption.

9.8 Emergency call procedure

The procedure is initiated by a special manual interworking at the MMI of a DECT-Portable Part PP. This may be the dialling of "112" as known for GSM/UMTS handsets, pressing of a special "emergency call button", selecting a menu-item, dialling an emergency number, etc.

For emergency call normal outgoing call control procedures apply unless explicitly stated otherwise in this clause.

After recognition of this manual interworking the PP can decide whether:

- a) to setup a normal outgoing call and dial automatically a (preconfigured) emergency call number; or
- b) to initiate an emergency call.

Case a) is allowed only, when the handset is locked to a DECT-Fixed Part FP where it has access-rights to. Since normal outgoing call procedures as defined in clause 9.3.1 apply for this case, this clause only specifies case b) in further detail.

Case b): if the PP is not synchronized to a basestation which supports emergency calls, the PP starts to search for a DECT basestation which supports emergency calls. The PP recognizes this by reading the extended higher layer capabilities of the FP which are broadcasted by the RFPs (Radio Fixed Parts). Because it is most likely that a public DECT FP supports emergency calls, the PP tries first to synchronize to a public DECT-FP. It identifies the system being "public" using the identity ARC (Access Rights Class) which is broadcast more often than the "emergency call supported" message by the RFPs. If there is no public FP supporting emergency calls available, the handset tries to search also for private FPs supporting emergency calls.

If a PP which offers emergency calls is not in range of an FP where it has access rights to, the PP is allowed to lock to every FP in range which supports emergency calls even when no emergency call is initiated. This will shorten the time for setting up emergency calls and makes it possible to indicate the availability of the emergency call to the user.

If the PP is locked to an FP, to which it does not have access rights to, because it wants to offer the possibility of emergency calls, the PP shall not initiate any other procedure than emergency call setup towards this FP.

After having found a suitable FP or if the handset was already locked to an FP supporting emergency calls the PP tries to setup a connection using the basic bearer setup procedure as defined in EN 300 175-3 [3] clause 10.5.1.1. The bearer_request message for this procedure shall contain the emergency call PMID (Portable MAC Identity). By receiving this special PMID the FP can distinguish between normal and emergency calls from the first message received from the PP.

Emergency call requests shall only be supported for PT initiated call.

NOTE 1: If the MAC layer at the FP identifies a call being an emergency call it can forward this call to the higher layers and the Lower Layer Management Entity (LLME) may initiate the reservation of a free speech path in case of trunk limitation (e.g. if there are only 8 speech paths possible per basestation, but all of them are settled). This reservation may lead into a release of another call in case of trunk limitation. Other emergency calls should not be dropped because of this reason.

NOTE 2: This special PMID can also be used if an RFP wants to reserve its last timeslot(s) for emergency calls only.

The NWK-layer CC_SETUP Message which follows the MAC layer setup shall carry the IE <<BASIC-SERVICE>> indicating "default service attributes" (i.e. single bearer speech call only) within <basic-service> and "emergency call" within <call class>.

The NWK-layer CC_SETUP Message which follows the MAC layer setup shall carry the IE <<BASIC-SERVICE>> indicating <call class> "Emergency call" and indicate the "default service attributes" (i.e. shall only request a single bearer speech call). The IE <<Portable_ID>> should contain the IPEI of the handset or the IPUI in case the PT has access based upon an active subscription. The IE <<Fixed_ID>> shall be empty (length of contents 0).

The FP shall accept this CC_SETUP message regardless of the contents of <<FIXED_ID>> and <<PORTABLE_ID>> and proceed with the NWK layer setup-procedure.

NOTE 3: After establishment of this call, the call can, if possible, be routed to an emergency line of the local emergency centre. This can even be done by a residential or business FP by automatically dialling an emergency call number.

Once this call is established, it can only be released by the FP and not by the PP. The connection is held to be able to retrieve the location of the PP and to avoid an unwanted release of the call by accident.

If the emergency call setup procedure leads into an abnormal call release or if the FP rejects the outgoing call request the handset may search for another FP supporting emergency calls.

9.9 Segmentation of information in CC procedures

For the completion of any CC procedure the exchange of large amount of IWU information may be required. To avoid the need for DLC segmentation of the NWK layer's PDU carrying the CC message the IWU information may be segmented into a number of CC messages.

Segmentation may be applied if the CC message that is to carry the IWU information exceeds the following limits:

DOWNLINK: 58 octets;

UPLINK: 58 octets for full slot operation.

NOTE 1: These lower limits are chosen because the maximum information length of a LAPC UI frame, see EN 300 175-4 [4] is 63 octets.

Segmentation may be used in any CC procedure. The service data shall be segmented into two or more messages, and these messages shall be transmitted independently. The first segment should be carried by a CC message belonging to the procedure, whereas the second and following segments shall be carried in one or more {IWU-INFO} messages. The TI and PD determined by the running CC procedure shall be used.

If the service data is segmented, each message shall contain the <<SEGMENTED-INFO>> information element. Each message should contain the maximum amount of service data (of IWU/user information).

The CC shall then deliver the resulting message (or series of messages) in sequence to the LCE for immediate delivery. Sending/reception of a {IWU-INFO} message carrying a segmented information shall trigger restart of the running CC procedure's timer.

Upon receipt of a CC message that contains the <<SEGMENTED-INFO>> element the CC (identified by the TI+PD) shall store (buffer) the complete message. Each (segmented) message shall be stored for a maximum of <CC_segment.1> seconds. Whenever a new segmented message is received, the CC shall attempt to construct a complete message using all stored segmented messages. Any duplicated segmented messages should be discarded.

A complete message shall be identified by the receipt of all of the segments as indicated in the <<SEGMENTED-INFO>> elements. Upon detection of a complete series of segments, the CC shall map the elements into the parameters of the relevant to the CC procedure message primitive. Duplicated mandatory elements and all <<SEGMENTED-INFO>> elements shall be discarded, and the individual <<IWU-TO-IWU>> and/or <<IWU-PACKET>> elements shall be concatenated into a single message unit parameter. The primitive shall be delivered to the IWU and the CC may change its state.

NOTE 2: The <<SEGMENTED-INFO>> element in each segmented message indicates the total number of segments belonging to the complete message, plus the number of segments remaining. The latter field should be used to sequence the segments.

An example of segmentation used in an Outgoing call setup procedure is provided on figure 110a:

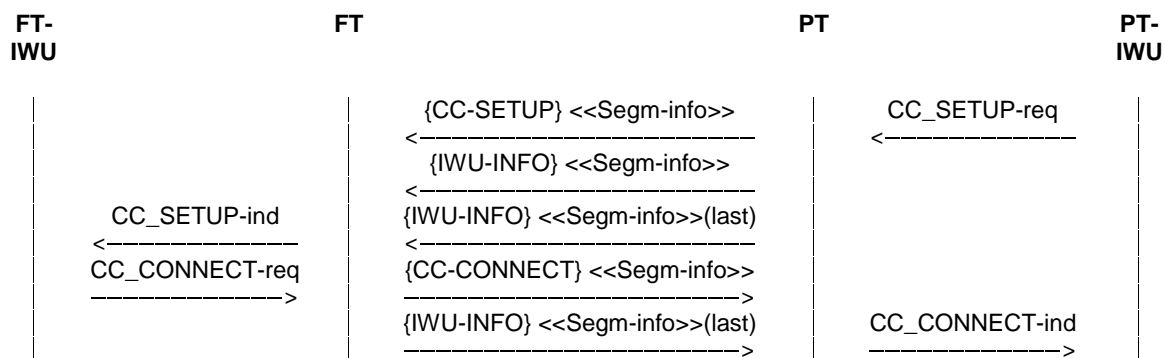


Figure 110a: Call setup with segmentation

10 Supplementary Services procedures

10.1 General

This clause describes the generic procedures for the control of all supplementary services at the user-network interface. The procedures may be used for the invocation and operation of supplementary services as part of either the CC or CISS protocol entities:

- Call Related Supplementary Services (CRSS); that operate in association with an existing CC call(s), but do not influence the states at either side of the call;
- Call Independent Supplementary Services (CISS); that operate outside of any CC calls.

Three generic protocols are defined for supplementary services:

| GENERIC NAME | PROTOCOL TYPE |
|---------------------------|---------------|
| 1) Keypad | Stimulus |
| 2) Feature key management | Stimulus |
| 3) Functional | Functional |

10.2 Keypad protocol

The keypad protocol is based on the use of the following information elements:

- <<SINGLE-KEYPAD>> } <<"KEYPAD">>
or <<MULTI-KEYPAD>> }
- <<SINGLE-DISPLAY>> } <<"DISPLAY">>
or <<MULTI-DISPLAY>> }

The CRSS and CISS uses the generic keypad protocol as follows:

- the PT sends a <<"KEYPAD">> information element to invoke a service. This element contains network dependent access codes;
- the FT sends a <<"DISPLAY">> information element that gives an indication to the PT user about the service.

These elementary steps may be repeated several times, with the FT <<"DISPLAY">> element providing a prompt for the PT user. The semantics of this dialogue are not specified.

The CRSS keypad protocol can be invoked at any phase of the associated CC call. During the establishment phase, a <<"KEYPAD">> element may only be included in the {CC-SETUP} message or a {CC-INFO} message. Subsequent elements shall always be sent in a {CC-INFO} message. A <<"DISPLAY">> element may be included in any CC message in the F=>P direction except {CC-NOTIFY} and {IWU-INFO}.

The CISS keypad protocol can be used in any of the CISS messages.

If the FT is unable to support the requested supplementary service it shall ignore the request and no further action is required. It may optionally inform the user of this rejection with one or more display messages.

This protocol does not specify the keypad codes used for the invocation of these services. These codes shall be agreed in advance, and may either adopt a common set of access codes (specified elsewhere) or may be network dependent.

10.3 Feature key management protocol

The feature key management protocol is based on the use of the following information elements:

- <<FEATURE-ACTIVATE>>;
- <<FEATURE-INDICATE>>.

These elements may be included in various CC messages or CISS messages, as defined in clause 6.

The generic feature key management protocol is used as follows:

- the PT sends a <<FEATURE-ACTIVATE>> information element to invoke a service. This element contains a feature identifier number which the network then maps onto the corresponding service as indicated by that users service profile;
- the FT responds to the activation with a <<FEATURE-INDICATE>> information element. This element contains either a feature identifier number (that correlates to the original activation) or a status indicator that reports the status of the requested service.

The feature key management protocol can be used for both call related and call independent supplementary services.

For call related supplementary services the feature protocol can be invoked by sending a <<FEATURE-ACTIVATE>> element in the {CC-SETUP} message (only during the establishment phase of the call) or a {CC-INFO} message.

For call independent supplementary services the feature protocol is invoked by sending a <<FEATURE-ACTIVATE>> element in a CISS message.

10.4 Functional protocol

Two categories of procedures are defined for the functional signalling for supplementary services. The first category, called the separate message approach, utilizes the hold and retrieve set of messages. The second category, called the common information element approach, utilizes the <<FACILITY>> information element and applies only to supplementary services that do not require synchronization of resources between the user and the network.

10.4.1 Separate messages approach

The messages defined in this clause are specified as separate functional messages for invoking specific functions which require changes of the resources. The following messages are defined:

- {HOLD};
- {HOLD-ACK};
- {HOLD-REJECT};
- {RETRIEVE};

- {RETRIEVE-ACK};
- {RETRIEVE-REJECT}.

10.4.1.1 Hold procedures

The hold function should be invoked in association with an existing call. The invocation of the hold function does not affect the existing CC state but does affect the auxiliary state.

A call hold is requested on receipt of a MNCC_HOLD-req primitive by sending the {HOLD} message. It will place the auxiliary state in the "HOLD REQUEST" state. The responding entity will send a MNCC_HOLD-ind primitive to the IWU and on receipt of a MNCC_HOLD-res primitive without "reject reason" meaning that the operation was successful shall acknowledge the request with a {HOLD-ACK} message. This will result in the auxiliary state being put in the "CALL HELD" state. If the IWU answers with MNCC_HOLD-res primitive including "Reject reason" because the requested hold function cannot be obtained, then a {HOLD-REJECT} message will be returned. This will result in the auxiliary state returning to the "IDLE" state.

The receipt of either {HOLD-ACK} or {HOLD-REJECT} message shall be acknowledged to the IWU by a MNCC_HOLD-cfm primitive indicating the success/failure of the operation.

10.4.1.2 Retrieve procedures

The retrieve function is requested on receipt of a MNCC_RETRIEVE-req primitive by sending a {RETRIEVE} message. This message may be sent while the auxiliary state is in the "CALL-HELD" state. Upon the sending the auxiliary state would go to the "RETRIEVE REQUEST" state.

On receipt of a {RETRIEVE} message the peer entity shall issue a MNCC_RETRIEVE-ind primitive to the IWU.

If a MNCC_RETRIEVE-res primitive without "Reject reason" is received meaning the "RETRIEVE-REQUEST" is successful, the {RETRIEVE-ACK} message will be returned to the peer. The auxiliary state would then return to the "IDLE" state.

If a MNCC_RETRIEVE-res primitive including "Reject reason" is received meaning the "RETRIEVE REQUEST" is not successful, the {RETRIEVE-REJECT} message will be returned. The auxiliary state would then remain in the "CALL HELD" state.

The receipt of either {RETRIEVE-ACK} or {RETRIEVE-REJECT} message shall be acknowledged to the IWU by a MNCC_RETRIEVE-cfm primitive indicating the success/failure of the operation.

10.4.1.3 Auxiliary states for hold and retrieve

There are four auxiliary states associated with the hold and retrieve functions:

- 1) IDLE;
- 2) HOLD REQUEST;
- 3) CALL HELD;
- 4) RETRIEVE REQUEST.

10.4.2 Common information element approach

The common information element approach is based on the use of the information element:

- <<FACILITY>>.

10.4.2.1 Call related procedures

The CRSS uses the generic functional protocol as follows:

- either side (PT or FT) sends a <<FACILITY>> information element to invoke a service;
- the responding side replies by returning the same <<FACILITY>> element. This reply can either accept or reject the service.

If appropriate, either side can respond to a rejection of the service by releasing the CC call, using the procedures defined in clause 9.

The facility protocol can be invoked at any phase of the associated CC call. During the establishment phase, a <<FACILITY>> element in the P=>F direction may only be included in the {CC-SETUP}, {CC-INFO}, {CC-ALERTING}, {CC-RELEASE} or {CC-RELEASE-COM} message. A <<FACILITY>> element in the F=>P direction may be included in any CC message. A {FACILITY} message may be exchanged at any phase in the associated CC call.

10.4.2.2 Call independent procedures

The functional protocol is invoked by either side on receipt of a MNSS_SETUP-req primitive, by sending a {CISS-REGISTER} message which may contain a <<FACILITY>> information element. This first message is submitted to the LCE, and the LCE is responsible for providing a duplex link to the desired PT or FT, using the procedures defined in clause 14. The CISS transaction identifier for this CISS instance is defined by this first message.

The receipt of the {CISS-REGISTER} message at the peer side shall be acknowledged to the IWU with a MNSS_SETUP-ind primitive.

All subsequent exchanges shall use the {FACILITY} message containing a single <<FACILITY>> information element. A {FACILITY} message shall be sent on receipt of a MNSS_FACILITY-req primitive and shall be acknowledged to the peer IWU by a MNSS_FACILITY-ind primitive.

Each instance of the CISS is released on receipt of a MNSS_RELEASE-req primitive using a single unacknowledged {CISS-RELEASE-COM} message. At the receiving side on receipt of a {CISS-RELEASE-COM} message a MNSS_RELEASE-ind primitive is issued.

10.4.2.3 Connectionless Supplementary Service (CLSS) procedure

Normal operation

If a point-to-point DECT link is known to exist or can be established, a connectionless transport mechanism can be used using a reliable data link connection.

The connectionless transport mechanism is based on {FACILITY} messages. The CLSS procedure shall only use the dummy TI value 6 indicating "connectionless".

Before data can be sent the originating entity shall first establish, if not already available, a reliable data link connection between the user and the network using the DL_ESTABLISH-req service primitive as described in EN 300 175-4 [4]. Completion of establishment of this connection is indicated by a DL_ESTABLISH-cfm primitive.

The {FACILITY} message is used to carry the "user" information, i.e. the component structures in the <<FACILITY>> information element. Structure and principals of coding and the procedures upon the components are described in EN 300 196-1 [16] clauses 8.1 and 8.2. Service specific coding is defined in the respective clauses of the ISDN stage 3 standards for the supplementary services.

Exceptional procedures

If a <<FACILITY>> information element is received with an invalid protocol profile, the receiving entity shall discard the {FACILITY} message.

If a {FACILITY} message is received and it does not contain the <<FACILITY>> information element, the receiving entity shall disregard the {FACILITY} message.

When a message other than {FACILITY} is received using the connectionless TI, the receiving entity shall disregard the message.

If either protocol entity receives an indication that the data link has been released or that the data link has spontaneously been reset, then the procedures as they affect the higher layer protocol are outside the scope of the present document.

The handling of layer 2 errors is supplementary service dependent and shall therefore be specified in the individual supplementary services.

10.5 Co-existence of multiple protocols

Networks may support one or more of the three generic protocols. These protocols may allow alternative methods of invoking similar supplementary services.

In general, the keypad and feature key management protocols have only local network significance, while the functional protocol may have wider significance.

NOTE: The functional protocol is the preferred method of invoking a given service, if there is a choice of methods available.

10.6 Application protocols

10.6.1 DECT standard functional supplementary services

For the functional protocol the use of the application protocol defined for ISDN is recommended. The following SS are defined (see EN 300 196-1 [16]):

- Malicious Call Identification (MCID), see EN 300 130-1 [24];
- Call Forwarding Busy (CFB), see EN 300 207-1 [25];
- Call Forwarding Unconditional (CFU), see EN 300 207-1 [25];
- User to User Signalling (UUS), see EN 300 286-1 [26];
- Calling Line Identification Presentation (CLIP), see EN 300 092-1 [27];
- Calling Line Identification Restriction (CLIR), see EN 300 093-1 [28];
- COnnected Line identification Presentation (COLP), see EN 300 097-1 [29];
- COnnected Line identification Restriction (COLR), see EN 300 098-1 [30];
- Completion of Calls to Busy Subscriber (CCBS), see EN 300 359-1 [31];
- FreePHone (FPH), see EN 300 210-1 [32];
- Advice Of Charge (AOC), see EN 300 182-1 [33];
- SUBaddressing (SUB), see EN 300 061-1 [34];
- Terminal Portability (TP), see EN 300 055-1 [35];
- Call Waiting (CW), see EN 300 058-1 [36];
- Direct Dialling In (DDI), see EN 300 064-1 [37];
- Multiple Subscriber Number (MSN), see EN 300 052-1 [38];
- Closed User Group (CUG), see EN 300 138-1 [39];
- Explicit Call Transfer (ECT), see EN 300 369-1 [40];
- Call Forwarding No Reply (CFNR), see EN 300 207-1 [25];

- Call Deflection (CD), see EN 300 207-1 [25];
- CONFerence call add-on (CONF), see EN 300 185-1 [41];
- Call Hold (CH), see EN 300 141-1 [42];
- Three ParTY (3PTY), see EN 300 188-1 [43].

NOTE: For the keypad protocol no specific application protocol is identified.

10.6.2 DECT specific supplementary services

For DECT specific supplementary services the feature key management protocol is used.

The following supplementary services are defined:

- queue management;
- indication of subscriber number;
- control of echo control functions;
- cost information.

10.6.2.1 Queue management

This service can be used to register a PP in a queue for outgoing calls, e.g. in the case of a network congestion.

If an outgoing call is requested by a PT by sending a {CC-SETUP} message and no external line is available, then the FT can respond with an allowed CC-message, which can include <<"DISPLAY">> information and/or a <<PROGRESS-INDICATOR>> information element indicating cause no. 8 ("in-band information or appropriate pattern now available") to request the PT to connect the U-plane. Upon receipt of this element, the PT should request its LLME to connect the receive U-plane, so that the user can receive verbal information.

In response to the displayed and/or verbal information about the outgoing call queue, the user can request to enter the queue or release the call.

To enter the queue the PT shall send a <<FEATURE-ACTIVATE>> information element containing a "queue entry request" e.g. in a {CC-INFO} message.

Upon receipt of the "queue entry request" the FT shall respond with a <<FEATURE-INDICATE>> information element e.g. in a {CC-INFO} message to tell if the service request has been accepted and to indicate the position in the queue.

NOTE: The FT might have to send a <<TIMER-RESTART>> with a {CC-NOTIFY} message to avoid that the CC completion timer <CC.04> in the PT expires.

If the queue position changes, then the FT shall send a new <<FEATURE-INDICATE>> information element containing the updated information about the position in the outgoing call queue. The FT can also send display and/or voice information.

The FT may send a <<PROGRESS-INDICATOR>> information element indicating cause No. 9 ("in-band information not available") to inform the PT that the verbal information has concluded. Upon receipt of this element, the PT may disable the received audio (in particular, the speech codec and audio circuits may be disabled) but the U-plane shall remain connected.

The PT may exit the queue at any time by releasing the call.

As soon as the external line is free the FT proceeds with the normal call set up procedure, by giving a dial tone or by sending a {CC-CALL-PROC} message or a {CC-ALERTING} message or a {CC-CONNECT} message, depending on the status of the call.

10.6.2.2 Indication of subscriber number

The subscriber number shall be requested by sending a <<FEATURE-ACTIVATE>> information element with the feature coding "indication of subscriber number".

Upon receipt of the <<FEATURE-ACTIVATE>> information element the FT shall respond with a <<FEATURE-INDICATE>> information element indicating if the service is accepted or rejected. If the service is accepted and activated, then the subscriber number shall be sent in a <<FEATURE-INDICATE>> information element.

10.6.2.3 Control of echo control functions

This service is used to connect or disconnect fixed part echo control functions, depending on e.g. the type of service and call routing information. See also EN 300 175-8 [7]. This service provides messages to control four FP echo control functions.

Requirement 1 and requirement 2:
(clause 7.10 of EN 300 175-8 [7]).

Option a) and option b):
(clause 7.4.1.2 of EN 300 175-8 [7]).

Requirement 1 is primarily designed to control the echo from the DECT hybrid in the case of a 2-wire connection.

Requirement 2 is primarily designed to control the echo from the far end hybrids.

Option a) is primarily designed to ensure that echo cancellers at the international switching centre are activated.

Option b) is designed for use with specific local networks (in particular connection to the GSM/UMTS mobile or fixed network) to ensure that the effective TCL from the DECT network is always in excess of 46 dB.

The exact echo control function(s) to be used depend upon the type of interface and the type of local network to which DECT is connected. These echo control functions should be disconnected when not needed to optimize the speech quality. The connect/disconnect decision (for each function) depends upon the installation and/or routing information (on a per call basis).

Where possible, all echo control function should be fully controlled by the fixed part and in many cases may be preset at installation. For particular cases (e.g. disconnection of requirement 2 for internal PBX calls) this service allows the PP to over-ride the FP control.

NOTE: All possible PP control options are provided to allow for future developments, but most of these should not be required.

Control of echo functions on a per call basis is expected to use the call routing information. This can be provided by number analysis in the PP or FP. When number analysis is provided in the PP, the messages in clause 7.7.16 may be used to transfer this information to the FP.

10.6.2.4 Cost information

This service can be used to obtain cost information such as tariffing, charging or charging pulses. It can furnish either DECT specific cost information or cost information for the complete connection including the DECT link.

The cost information shall be requested by sending a <<FEATURE-ACTIVATE>> information element with the feature coding "cost information".

The parameter in the <<FEATURE-ACTIVATE>> information element is used to request either DECT internal cost information or cost information for the complete connection and to choose between tariff information, charging pulses during the call or a calculated amount at the end of the call.

Upon receipt of the <<FEATURE-ACTIVATE>> information element the FT shall respond with a <<FEATURE-INDICATE>> information element indicating if the service is accepted or rejected. If the service is accepted and activated, then the cost information shall be sent in one or more <<FEATURE-INDICATE>> information elements containing charging components.

The support of this feature does not compel any specific tariffing principle.

11 Connection Oriented Message Service (COMS)

11.1 General

The connection oriented message service procedures only deal with packet switched connections. The COMS represents a group of procedures covering all aspects of packet mode call establishment, packet data transfer and release.

The protocol allows for multiple instances of a COMS call at both the fixed termination and at the portable termination. These multiple instances are assumed to operate completely independently from each other. The possible existence of multiple instances is therefore ignored in the following clauses, which only describe the procedures for a single instance.

A reliable C-plane DLC link (LAPC) shall be available before any of these COMS procedures can operate. The establishment and maintenance of this link is the responsibility of the LCE and is described in clause 14.

NOTE: A "LINK PENDING" state is included in the LCE definition which is used while the LCE is waiting for DLC link establishment to complete. If a COMS timer expires whilst in this state, the resulting release should be handled locally.

11.2 COMS states

11.2.1 States at PT

11.2.1.1 State TS-0: "NULL"

No call exists.

11.2.1.2 State TS-1: "CONNECT PENDING"

The PT has sent a setup message to the FT, but has not received a response.

11.2.1.3 State TS-2: "RELEASE PENDING"

The PT has sent a release message to the FT, but has not received a response.

11.2.1.4 State TS-3: "ACTIVE"

- a) The PT has answered an incoming call;
- b) the PT has received an indication that the FT has connected a PT outgoing call.

11.2.2 States at FT

11.2.2.1 State FS-0: "NULL"

No call exists.

11.2.2.2 State FS-1: "CONNECT PENDING"

The FT has sent a setup message to the PT, but has not received a response.

11.2.2.3 State FS-2: "RELEASE PENDING"

The FT has sent a release message to the PT, but has not received a response.

11.2.2.4 State FS-3: "ACTIVE"

- a) The FT has allocated an incoming call to one PT;
- b) the FT has sent a message to the PT reporting connection of an outgoing call.

11.3 COMS establishment procedures

11.3.1 PT initiated COMS establishment

11.3.1.1 COMS request

PT initiated COMS establishment is started upon receipt of a MNCO_SETUP-req primitive from the interworking unit at the PT side.

The COMS entity (P-COMS) initiates COMS establishment by sending a {COMS-SETUP} message to its peer entity (F-COMS). This message is submitted to the LCE in the PT, and the P-COMS enters the "CONNECT PENDING" state and starts timer P<COMS.03>.

The {COMS-SETUP} message shall carry all details of the interworking attributes such that all the necessary resources can be reserved and installed by the F-COMS and the F-IWU.

Call accept

The F-COMS entity shall examine the attributes defined in the {COMS-SETUP} message and attempt to fulfil them. If it can meet the request, it shall issue a MNCO_SETUP-ind primitive to the F-IWU. The F-IWU is expected to reply with a MNCO_CONNECT-req primitive, if the call is acceptable.

NOTE: Either the F-COMS or a F-IWU may reject the COMS call. The F-COMS examines the <<CONNECTION-ATTRIBUTES>> element and the F-IWU examines the <<IWU-ATTRIBUTES>> element. The call is only offered to the F-IWU after it has been accepted by the F-COMS.

Call reject

If the F-COMS cannot meet any of the setup requests, or if the {COMS-SETUP} message contains errors or inconsistencies, or if the F-IWU replies with a MNCO-REJECT-req primitive, the FT shall reject the request by sending a {COMS-RELEASE-COM} message.

Setup release

If timer P<COMS.03> expires before a suitable response is received, the P-COMS shall immediately release the call by sending a {COMS-RELEASE-COM} message, with the reason set to "timer expiry". It shall then issue a MNCO_RELEASE-ind primitive and shall enter the "NULL" state.

11.3.1.2 COMS connection

Upon receiving a MNCO_CONNECT-req primitive, the F-COMS shall complete the C-plane connection and shall send a {COMS-CONNECT} message to the P-COMS. It shall then enter the "ACTIVE" state.

On receipt of this message the P-COMS shall complete the C-plane connection. The P-COMS shall then stop timer P<COMS.03> and enter the "ACTIVE" state. It shall then issue a MNCO_CONNECT-ind primitive to the P-IWU.

11.3.2 FT initiated COMS establishment

11.3.2.1 COMS request

FT initiated COMS establishment is started upon receipt of a MNCO_SETUP-req primitive from the interworking unit at the FT side.

The COMS entity (F-COMS) initiates COMS establishment by sending a {COMS-SETUP} message to its peer entity (P-COMS). This message is submitted to the LCE in the FT, and the F-COMS enters the "CONNECT PENDING" state, and starts timer F<COMS.03>.

The {COMS-SETUP} message should carry all details of the interworking attributes such that all the necessary resources can be reserved and installed by the PT.

Call accept

The P-COMS entity shall examine the attributes defined in the {COMS-SETUP} message and attempt to fulfil them. If it can meet the request, it shall issue a MNCO_SETUP-ind primitive. A MNCO_CONNECT-req primitive will then be received in reply if the call is acceptable.

NOTE: Either the P-COMS or the PP higher layer application may reject the COMS call. The P-COMS examines the <<CONNECTION-ATTRIBUTES>> element and the PP higher layer application examines the <<IWU-ATTRIBUTES>> element. The call is only offered to the PP higher layer application after it has been accepted by the P-COMS.

Call reject

If the P-COMS cannot meet any of the setup requests, or if the {COMS-SETUP} message contains errors or inconsistencies, or if a MNCO_REJECT-req primitive is received, the P-COMS shall reject the request by sending a {COMS-RELEASE-COM} message.

Setup release

If timer F<COMS.03> expires before a suitable response is received, the F-COMS shall immediately release the call by sending a {COMS-RELEASE-COM} message, with the reason set to "timer expiry". It shall then issue a MNCO_RELEASE-ind primitive to the F-IWU and shall enter the "NULL" state.

11.3.2.2 COMS connection

Upon receiving a MNCO_CONNECT-req primitive, the P-COMS shall complete the C-plane connection and shall send a {COMS-CONNECT} message to the F-COMS. It shall then enter the "ACTIVE" state.

On receipt of this message the F-COMS shall complete the C-plane connection. The F-COMS shall then stop timer F<COMS.03> and enter the "ACTIVE" state and shall issue a MNCO_CONNECT-ind primitive to the F-IWU.

11.4 COMS data transfer procedures

11.4.1 Procedure at the sending side

This service shall only support octet structured data, using any of the defined information elements. Unstructured data shall not be supported.

Upon receipt of a MNCO_INFO-req primitive the COMS shall attempt to map the parameters into one or more of the {COMS-INFO} message elements. If no mapping is possible, the message unit shall be discarded, and no further action shall be required.

If the resulting message exceeds the following limits the service data shall be segmented into two or more messages, and these messages shall be transmitted independently.

The following message limits should be used:

DOWNLINK: 58 octets;

UPLINK: 58 octets for full slot operation.

NOTE: These lower limits are chosen because the maximum information length of a LAPC UI frame, see EN 300 175-4 [4] is 63 octets.

If the service data is segmented, each message shall contain the <<SEGMENTED-INFO>> information element, together with a duplicate of all of the mandatory elements. Each message should contain the maximum amount of service data (of user information).

The COMS shall then deliver the resulting message (or series of messages) in sequence to the LCE for immediate delivery via the connection oriented S-SAP (SAPI = "0"). The messages shall be delivered using DL_UNITDATA-req primitives, indicating the use of a Class U (unacknowledged) link.

After sending a complete message (of one or more segments) the COMS shall start timer <COMS.01> and shall wait for the final acknowledgement to be received from the peer COMS entity. No further messages shall be submitted until this acknowledgement is received. Upon receipt of this acknowledge, the COMS shall issue a MNCO_ACK-ind primitive to the IWU to indicate successful delivery.

If timer <COMS.01> expires the COMS shall resubmit the complete message starting from the first segment. Timer <COMS.01> shall be restarted after transmission of the complete message. If timer <COMS.01> expires a second time the service shall be released using the procedures defined in clause 11.6.

11.4.2 Procedure at the receiving side

Upon receipt of a {COMS-INFO} message, the COMS shall act as follows:

- a) if the message does not contain the <<SEGMENTED-INFO>> information element it shall map the elements into the parameters of a MNCO_INFO-ind primitive. It shall immediately issue the resulting primitive via the MNCO-SAP;
- b) if the message does contain the <<SEGMENTED-INFO>> element the COMS shall store (buffer) the complete message. Each (segmented) message shall be stored for a maximum of <COMS.00> seconds. Whenever a new segmented message is received, the COMS shall attempt to construct a complete message using all stored segmented messages that contain the same <<PROTOCOL-DISCRIMINATOR>> element coding. Any duplicate segmented messages should be discarded.

A complete message shall be identified by the receipt of all of the segments as indicated in the <<SEGMENTED-INFO>> elements. Upon detection of a complete series of segments, the COMS shall map the elements into the parameters of a MNCO_INFO-ind primitive. Duplicate mandatory elements and all <<SEGMENTED-INFO>> elements shall be discarded, and the individual <<ALPHANUMERIC>> and/or <<IWU-PACKET>> elements shall be concatenated into a single message unit parameter. The COMS shall immediately issue the resulting primitive via the MNCO-SAP.

NOTE: The <<SEGMENTED-INFO>> element in each segmented message indicates the total number of segments belonging to the complete message, plus the number of segments remaining. The latter field should be used to sequence the segments.

Upon issuing the complete message to the IWU, the COMS shall immediately return a {COMS-ACK} message to its peer entity using the same Class U link as used for {COMS-INFO} messages.

11.5 COMS suspend and resume procedures

A COMS call may optionally be suspended. The suspend procedure allows the service attributes to be reserved such that the call can be resumed more rapidly.

The suspend and resume shall use the standard C-plane suspend and resume procedure under control of the LCE. See clause 14.2.6.

The COMS entity may request the LCE to suspend a C-plane link at any time after reaching the "ACTIVE" state. No further messages should be submitted for that link as these will invoke an immediate resumption of the link.

NOTE: The DLC suspend and resume procedures are managed by the LCE. In the case of Class A operation, all resources associated with the link are released (i.e. suspension is equivalent to release). In the case of Class B operation, all MAC and physical layer resources are released, but the DLC C-plane resources are preserved. This allows for the link to be restarted with Class B operation.

The COMS service can be resumed by either side by submitting a new {COMS-INFO} message to the LCE. This resumption may use any suitable link.

A suspended COMS entity may be discarded without notification to the sender. Any subsequent resumption messages shall then be discarded without notification to the sender. A COMS entity may also be replaced with a new (re-established) COMS entity at any time (i.e. a COMS setup that uses the transaction identifier of an existing entity) shall always take priority and shall over-write the existing values.

11.6 COMS release procedures

11.6.1 Normal COMS release

The COMS release procedures may be started by the COMS entity at either side at any time, upon receipt of a MNCO_RELEASE-req primitive. The starting entity sends a {COMS-RELEASE} message, starts timer <COMS.02>, and enters the "RELEASE PENDING" state. The release message may include an information element giving the reason for the release: if no reason is given "normal" release should be assumed.

Upon receipt of the {COMS-RELEASE} message, the accepting side shall immediately release all resources associated with the call. It then confirms completion of the release by sending a {COMS-RELEASE-COM} message, enters the "NULL" state, and issues a MNCO_RELEASE-ind primitive. The initiating side shall wait for receipt of this {COMS-RELEASE-COM} message before it too can release all resources, stop timer <COMS.02>, and enter the "NULL" state. The initiating side shall then issue a MNCO_RELEASE-cfm primitive, indicating a normal (acknowledged) release. Both sides shall also record the release of the call in their respective LCEs.

If timer <COMS.02> expires before the receipt of a {COMS-RELEASE-COM} message, the initiating side shall release all resources, shall report the call as released to the LCE, and shall issue a MNCO_RELEASE-ind primitive indicating an abnormal time-out release.

11.6.2 Release collisions

A release collision occurs when both sides of a call issue a {COMS-RELEASE} message at the same time, such that at least one of these messages is received by a COMS entity that is already in the "RELEASE PENDING" state.

If either COMS entity receives a {COMS-RELEASE} message, while in the "RELEASE PENDING" state the normal release procedure is not followed by that COMS entity. In this event, the COMS entity immediately releases all the COMS resources, reports this release to the LCE and issues a MNCO_RELEASE-ind primitive indicating abnormal release.

12 ConnectionLess Message Service (CLMS)

12.1 General

The ConnectionLess Message Service procedures offer a connectionless packet service. The CLMS shall provide generic message formats that enable a single packet of differing types of user data to be transported. A single CLMS entity may handle messages from multiple applications.

All messages shall be handled sequentially, in the order of arrival, by a single CLMS entity. Each message shall be handled independently of all other messages. The following clauses shall describe the procedures for the transmission and reception of one message.

There are two types of CLMS messages:

- 1) fixed length messages;
- 2) variable length messages.

Fixed length messages shall be routed via the broadcast service (B-SAP), and these messages shall conform to the fixed length operation specified for this service.

Variable length messages shall be routed via the LAPC services (S-SAP) where they may be routed via a connection oriented link (SAPI = "0") or a connectionless link (SAPI = "3"). In both cases unacknowledged link operation shall be used.

A connection oriented link shall only be used if a suitable link is already established. Otherwise a connectionless link should be used. The choice of link and the establishment of these links are the responsibility of the LCE and are described in clause 14.

"LINK PENDING" state is included in the LCE definition which is used while the LCE is waiting for DLC link establishment to complete. A link in this state shall not be used for the transport of CLMS messages.

12.2 CLMS states

No states shall be defined for the CLMS entity, the CLMS shall always be ready to transmit or receive a message.

12.3 CLMS message transmission procedures

12.3.1 Fixed length messages

Fixed length CLMS messages shall use the B-FORMAT message structure.

12.3.1.1 Procedure in the Fixed radio Termination (FT)

Upon receipt of a MNCL_UNITDATA-req primitive indicating fixed length operation, the CLMS shall attempt to map the parameters into {CLMS-FIXED} message elements, using one or more message sections as appropriate. If no mapping is possible, the message unit shall be discarded, and no further action shall be required.

The CLMS shall only insert <<FILL>> elements into the final message section in order to fill that final section.

NOTE 1: The total message length is limited by the maximum number of data sections, as defined in clause 8.3.

NOTE 2: If the data completely fills the last data sections, no <<FILL>> element is added.

The CLMS shall then deliver all sections of the resulting message to the LCE for immediate delivery via the B-SAP. The message priority shall be set to "normal".

12.3.1.2 Procedure in the Portable radio Termination (PT)

Upon receipt of a {CLMS-FIXED} message, the CLMS shall check the contained address in the first section. If the address section is missing, or if the address does not match any of the PT identities the message shall be discarded.

If the address does match the CLMS shall map the remaining elements into the parameters of a MNCL_UNITDATA-ind primitive (removing any <<FILL>> elements). It shall immediately issue the resulting primitive via the MNCL-SAP.

12.3.2 Variable length messages

Variable length CLMS messages shall use the S-FORMAT message structure. However, the transaction value field is redundant and shall be set to "0" by the sending entity. This field should be ignored by the receiving entity. Four (4) complete CLMS message segments, equating to 176 characters shall be supported.

12.3.2.1 Procedure at the sending side

This service shall only support octet structured service data, using any one of the defined information elements. Unstructured data shall not be supported.

Upon receipt of a MNCL_UNITDATA-req primitive indicating variable length operation, the CLMS shall attempt to map the parameters into the {CLMS-VARIABLE} message elements. If no mapping is possible, the message unit shall be discarded, and no further action shall be required.

If the resulting message exceeds the following limits the service data shall be segmented into two or more messages, and these messages shall be transmitted independently.

The following message limits should be used:

DOWNLINK: 63 octets;

UPLINK: 63 octets for full slot operation.

NOTE: These lower limits are chosen because the maximum information length of a LAPC UI frame, see EN 300 175-4 [4], is 63 octets.

If the service data is segmented, each message shall contain the <<SEGMENTED-INFO>> information element, together with a duplicate of all of the mandatory elements. Each message should contain the maximum amount of service data (of user information).

The CLMS shall then deliver the resulting message (or series of messages) in sequence to the LCE for immediate delivery via the S-SAP.

12.3.2.2 Procedure at the receiving side

Upon receipt of a {CLMS-VARIABLE} message, the CLMS shall check the contained address. If the address does not match the message shall be discarded. If the address does match the CLMS shall:

- a) if the message does not contain the <<SEGMENTED-INFO>> information element it shall map the elements into the parameters of a MNCL_UNITDATA-ind primitive. It shall immediately issue the resulting primitive via the MNCL-SAP;
- b) if the message does contain the <<SEGMENTED-INFO>> element the CLMS shall store (buffer) the complete message. Each (segmented) message shall be stored for a maximum of <CLMS-00> seconds. Whenever a new segmented message is received, the CLMS shall attempt to construct a complete message using all stored segmented messages that contain the same <<SHORT-ADDRESS>> and <<PROTOCOL-DISCRIMINATOR> element coding. Any duplicate segmented messages may be discarded.

A complete message shall be identified by the receipt of all of the segments as indicated in the <<SEGMENTED-INFO>> elements. Upon detection of a complete series of segments, the CLMS shall map the elements into the parameters of a MNCL_UNITDATA-ind primitive. Duplicate mandatory elements and all <<SEGMENTED-INFO>> elements shall be discarded, and the individual <<ALPHANUMERIC>>, <<IWU-TO-IWU>> or <<IWU-PACKET>> information elements shall be concatenated into a single message unit parameter. The CLMS shall immediately issue the resulting primitive via the MNCL-SAP.

NOTE: The <<SEGMENTED-INFO>> element in each segmented message indicates the total number of segments belonging to the complete message, plus the number of segments remaining. The latter field should be used to sequence the segments.

12.3.2.3 Restrictions for portable side initiated messages

CLMS messages initiated from the portable side are subject to the special transmission restrictions given in EN 300 175-3 [3] when using connectionless MAC services. These restrictions introduce extra delays for messages in excess of two segments.

13 Mobility Management (MM) procedures

13.1 General

This clause describes the procedures used for mobility management at the radio interface.

The main function of the Mobility Management (MM) is to support the mobility of portable parts, such as informing the network of its present location and providing user identity confidentiality.

The MM procedures are described in eight groups:

- identity procedures;
- authentication procedures;
- location procedures;
- access rights procedures;
- key allocation procedure;
- parameter retrieval procedure;
- ciphering related procedure;
- External protocol information procedure.

Each of these procedures shall be treated as a separate transaction, with a single transaction identifier used for the whole procedure. The transaction identifier is assigned by the entity that initiates the procedure (the entity that sends the first message).

Two MM procedures are allowed at any one time, but they shall not both have been initiated by the same side. This limitation is enforced by the transaction identifiers, which allow only one value to be assigned by each side.

The priorities of the MM procedures are defined in clause 15.5 which describes the management of MM procedures.

If large amount of IWU information needs to be transmitted as part of a MM procedure the information may be segmented. For the requirements in regard of segmenting MM messages see clause 13.9.3.

13.2 Identity procedures

The identity procedures can be used:

- to request a PT to provide specific identification parameters to the FT;
- to assign a temporary portable user identity to a PT;
- to delete a temporary portable user identity in a PT;
- to assign a network assigned identity to a PT;
- to delete a network assigned identity in a PT.

The identity procedures are initiated by the FT and can be used any time.

13.2.1 Procedure for identification of PT


The identification procedure is used by the FT to request a PT to provide specific identification parameters to the FT e.g. the international portable user identity or the international portable equipment identity.

Upon receiving a MM_IDENTITY-req primitive the FT initiates the identification procedure by transferring an {IDENTITY-REQUEST} message to the PT and starts the timer <MM_ident.2>. The {IDENTITY-REQUEST} message specifies the type of the requested identity in the <<IDENTITY-TYPE>> information element. Optionally more than one <<IDENTITY-TYPE>> information element can be included by using the <<REPEAT-INDICATOR>> information element. Optionally an <<IWU-TO-IWU>> information element can be included.

Upon receipt of the {IDENTITY-REQUEST} message the PT issues a MM_IDENTITY-ind primitive. On receipt of a MM_IDENTITY-res primitive the PT sends back an {IDENTITY-REPLY} message which contains the identification parameters as requested by the FT. If more than one identity has been requested and not all of them can be provided, then the available ones shall be included in the {IDENTITY-REPLY} message. If none of the requested identification parameters can be provided, then the {IDENTITY-REPLY} message will contain no identification information. Optionally an <<IWU-TO-IWU>> information element can be included.

Upon receipt of the {IDENTITY-REPLY} message the FT shall stop the timer <MM_ident.2>. The FT issues a MM_IDENTITY-cfm primitive.

The identification procedure is supervised by the timer <MM_ident.2> in the FT. At the first expiry of timer <MM_ident.2> the FT should retransmit the {IDENTITY-REQUEST} message. If the timer <MM_ident.2> expires a second time the FT shall abort the procedure and release the transaction.

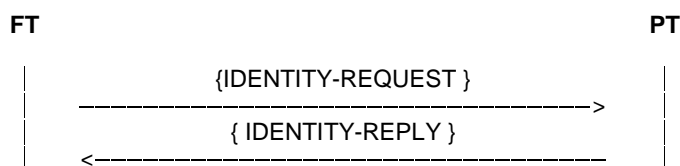

NOTE: An {IDENTITY-REPLY} message without any information elements has the function of an identity reject.

Figure 111: Procedure for identification of PT

13.2.2 Procedure for temporary identity assignment

A temporary identity may be assigned either using the procedure for temporary identity assignment, described in this clause or by the procedure for location registration, described in clause 13.4.

Upon receiving a MM_IDENTITY_ASSIGN-req primitive the FT initiates the procedure by sending a {TEMPORARY-IDENTITY-ASSIGN} message to the PT. The FT starts the timer <MM_ident.1>.

The {TEMPORARY-IDENTITY-ASSIGN} message shall contain one <<PORTABLE-IDENTITY>> information element with the Temporary Portable User Identity (TPUI) and/or one <<NWK-ASSIGNED-IDENTITY>> information element with a network assigned identity. When the message contains a <<PORTABLE-IDENTITY>> element, it may also contain an optional <<DURATION>> information element, which may contain a defined time limit and/or a lock limit for the newly assigned TPUI. It may also contain an optional <<IWU-TO-IWU>> information element. If the <<DURATION>> element is omitted, the default values of "infinite" time limit and "no limits" lock limit shall be assumed.

NOTE 1: The detailed coding of the <<DURATION>> element appears in clause 7.7.13. Refer also to EN 300 175-6 [5] for details of the application of time limits and lock limits to assigned TPUIs.

Upon receipt of a {TEMPORARY-IDENTITY-ASSIGN} message the PT issues a MM_IDENTITY_ASSIGN-ind primitive to the P-IWU.

The P-IWU replies with MM_IDENTITY_ASSIGN-res primitive indicating either "Accept" or "Reject" of the request.

On receipt of "Accept" indication PT shall send a {TEMPORARY-IDENTITY-ASSIGN-ACK} message to the FT.

On receipt of "Reject" indication PT shall send a {TEMPORARY-IDENTITY-ASSIGN-REJ} message to the FT. The {TEMPORARY-IDENTITY-ASSIGN-REJ} message can optionally contain the <<REJECT-REASON>> information element if such has been included in the "Reject" primitive.

The receipt of the {TEMPORARY-IDENTITY-ASSIGN-ACK} message should be understood by FT as following:

- PP has stored the received identities. If an individual TPUI has been assigned, then any previously assigned individual TPUI (for the relevant location area) has been replaced by the new one. If a network assigned identity has been assigned, then an earlier stored NWK assigned identity has been replaced by the new one;
- PP has erased the required identities if a <<DURATION>> information element with the value "Erase" was sent in the {TEMPORARY-IDENTITY-ASSIGN} message. (This will be the case as well if PP has no record for the identities required to be erased.)

The receipt of the {TEMPORARY-IDENTITY-ASSIGN-REJ} message should be understood by FT as following:

- PP has not stored the received identities as it is not capable of storing them;
- PP has not stored the received identities as it does not support the limits indicated in the <<DURATION>> element.

Upon receipt of a {TEMPORARY-IDENTITY-ASSIGN-ACK} message or a {TEMPORARY-IDENTITY-ASSIGN-REJ} message the FT shall stop the timer <MM_ident.1>. If a {TEMPORARY-IDENTITY-ASSIGN-ACK} message has been received the FT shall consider the assignment (or erasure) as successful. If a {TEMPORARY-IDENTITY-ASSIGN-REJ} message is received the FT shall consider the procedure to have failed. The FT issues a MM_IDENTITY_ASSIGN-cfm primitive indicating the outcome of the procedure.

NOTE 2: Each TPUI assignment is always associated to one specific IPUI and one specific location area.

The temporary identity assignment is supervised by the timer <MM_ident.1> in the FT. At the first expiry of timer <MM_ident.1> the FT should re transmit the {TEMPORARY-IDENTITY-ASSIGN} message. If the timer <MM_ident.1> expires a second time the FT shall abort the procedure and release the transaction. The FT then issues a MM_IDENTITY_ASSIGN-cfm primitive indicating failure of the procedure.

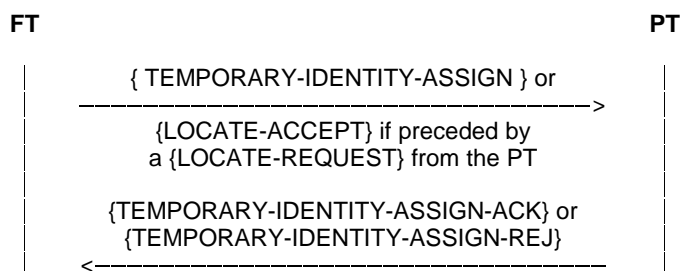


Figure 112: Temporary identity assignment

13.3 Authentication procedures

The authentication procedures can be used:

- to check that the identity provided by the PT is the correct identity;
- to authenticate the user;
- to check that the identity provided by the FT is the correct identity;
- to provide a new key for ciphering;
- to check the ZAP field provided by the PT;
- to send a ZAP command to the PT.

The authentication procedures are based on the use of the following information elements:

- <<AUTH-TYPE>>;
- <<RAND>>;
- <<RS>>;
- <<RES>>;
- <<ZAP-FIELD>>;
- <<REJECT-REASON>>.

13.3.1 Authentication of a PT

The authentication of a PT may be invoked by the FT in various cases e.g. when originating or terminating a call, activation or deactivation of a feature or supplementary service, location procedures or other MM procedures. Authentication can also be invoked during a call (in-call authentication).

Procedure for authenticating a PT:

Upon receiving a MM_AUTHENTICATE-req primitive the FT sends an { AUTHENTICATION-REQUEST } message which contains the <<AUTH-TYPE>> information element (defining the chosen authentication type and authentication key) and the <<RAND>> and <<RS>> information elements (two numbers necessary for calculating the response parameter). The <<RS>> information element is only mandatory, when a DECT standard authentication algorithm is used, for other algorithms it can be optional. The INC bit in the <<AUTH-TYPE>> information element can be used to ask the PT to increase its ZAP-register. The { AUTHENTICATION-REQUEST } message can also contain the optional <<CIPHER-INFO>> information element and an optional <<IWU-TO-IWU>> information element. The timer <MM_auth.1> is started.

Upon receipt of the {AUTHENTICATION-REQUEST} message PT issues a MM_AUTHENTICATE-ind primitive. The relevant ZAP field shall be incremented, if the INC bit in the <<AUTH-TYPE>> information element is set. If the value in the ZAP field was already at the maximum value of 0FH, then it shall be set to zero. Before incrementing the relevant ZAP field the IWU may issue a MM_AUTHENTICATE-req primitive thereby requesting PT to authenticate the FT - in this case the authentication of a PT with incrementing the ZAP field procedure, and authentication of a FT procedure shall be treated as nested procedures, see clause H.2. If the authentication of the FT fails, the ZAP field may not be incremented.

NOTE: A ZAP field is always related to one IPUI (subscription), as also an authentication key is always related to one IPUI. Therefore several ZAP fields can exist in the PT. In this procedure the relevant ZAP field is that, which is related to the same IPUI as the used authentication key.

Upon receiving a MM_AUTHENTICATE-res primitive indicating "accept" the PT shall respond by sending an {AUTHENTICATION-REPLY} message which contains the <<RES>> information element with the calculated result. If the PP has stored a ZAP field that is related to the current active IPUI, then also the <<ZAP-FIELD>> information element with the relevant ZAP value shall be included. If the PP has stored a "service class" that is related to the current active IPUI, then also the <<SERVICE-CLASS>> information element shall be included. If in the {AUTHENTICATION-REQUEST} message the TXC bit in the <<AUTH-TYPE>> information element was set, then the derived cipher key shall be sent using the <<KEY>> information element. An optional <<IWU-TO-IWU>> information element can also be included in the {AUTHENTICATION-REPLY} message. Upon receiving a MM_AUTHENTICATE-res primitive indicating "reject" the PT shall respond by sending an {AUTHENTICATION-REJECT} message containing the optional <<REJECT-REASON>> information element and one of a prioritized list of the optional <<AUTH-TYPE>> information element to propose an alternative algorithm or key.

The FT shall only request to send a derived cipher key (e.g. for GSM/UMTS) when the DECT link is already ciphered.

Upon receipt of the {AUTHENTICATION-REPLY} message or the {AUTHENTICATION-REJECT} message the FT shall stop the timer <MM_auth.1> and issue a MM_AUTHENTICATE-cfm primitive indicating the outcome of the operation. The validity of the response shall be checked. If the FT has received an {AUTHENTICATION-REPLY} message, where the <<RES>> information element contains the correct result the PT authentication shall be considered as successful. If the FT has received an {AUTHENTICATION-REPLY} message where the <<RES>> information element contains the wrong result, then in cases where the Temporary Portable User Identity (TPUI) has been used the local network may decide to initiate the identity procedure. In any case the FT may optionally communicate the failed authentication to the PT in a subsequent NWK layer message, using a <<RELEASE-REASON>> or <<REJECT-REASON>> information element. The FT issues a MM_AUTHENTICATE-cfm primitive.

If a DECT standard authentication algorithm is used, then together with the authentication result a new ciphering key is calculated. If in this case the UPC-bit in the <<AUTH-TYPE>> information element is set, this new ciphering key shall be stored and shall be given the cipher key number as indicated in the <<AUTH-TYPE>> information element.

The procedure for authenticating a PT is supervised by the timer <MM_auth.1> in the FT. At the first expiry of timer <MM_auth.1> the FT should re transmit the {AUTHENTICATION-REQUEST} message. If the timer <MM_auth.1> expires a second time the FT shall abort the procedure and release the transaction.

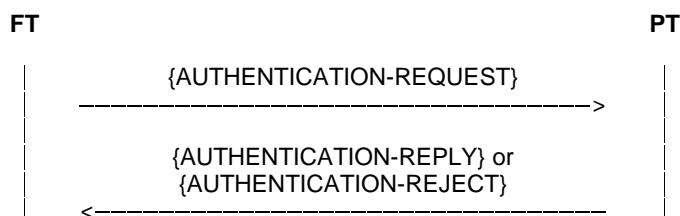


Figure 113: Authentication of the PT

13.3.2 Authentication of the user

The authentication of the user is combined with the authentication of a PT. Therefore the information elements and messages are the same as in clause 13.3.1. The only difference is that in the <<AUTH-TYPE>> information element the use of a different key is indicated. In this case part of the key is added by the user via the keypad. This keypad entry is not transmitted over the air, but locally used by the PT to calculate the authentication key, K.

The procedure is equivalent to that one described in clause 13.3.1. The timer that is used by the FT is called <MM_auth.2>, which has a longer period in order to enable the user to enter the User Personal Identity (UPI).

If user authentication procedure is started during an unfinished PT initiated procedure of lower priority, then the PT shall stop the timer of the unfinished lower priority procedure and start the <MM_auth.2> timer. The PT shall stop the <MM_auth.2> timer when it responds to the user authentication procedure by sending an {AUTHENTICATION-REPLY} or {AUTHENTICATION-REJECT} message. If the <MM_auth.2> timer expires or is stopped and the lower priority procedure has not been finished in the meantime, then the timer of the interrupted lower priority procedure shall be restarted, see clause 15.5.

13.3.3 Authentication of a FT

This authentication procedure is activated by the PT, typically when the FT is sending a ZAP-command.

Procedure for authenticating a FT:

Upon receiving a MM_AUTHENTICATE-req primitive the PT sends an {AUTHENTICATION-REQUEST} message which contains the <<AUTH-TYPE>> information element (defining the chosen authentication type) and the <<RAND>> information elements (a random number necessary for calculating the response parameter). It can also contain the optional <<CIPHER INFO>> information element and an optional <<IWU-TO-IWU>> information element. The timer <MM_auth.1> is started.

NOTE 1: The <<RES>> information element is only included when the {AUTHENTICATION-REQUEST} message is used for the key allocation procedure.

The FT, upon receiving the {AUTHENTICATION-REQUEST} message, issues an MM_AUTHENTICATE-ind primitive.

Upon receiving a MM_AUTHENTICATE-res primitive indicating "accept" the FT shall respond by sending an {AUTHENTICATION-REPLY} message which contains the <<RES>> information element with the calculated result and the <<RS>> information element with a number necessary for calculating the response parameter. The <<RS>> information element is only mandatory when a DECT standard authentication algorithm is used, for other algorithms it can be optional. An optional <<IWU-TO-IWU>> information element can also be included in the {AUTHENTICATION-REPLY} message. Upon receiving a MM_AUTHENTICATE-res primitive indicating "reject" the FT shall respond by sending an {AUTHENTICATION-REJECT} message containing one or a prioritized list of the optional <<AUTH-TYPE>> information element to propose an alternative algorithm or key and an optional <<REJECT-REASON>> information element.

Upon receipt of the {AUTHENTICATION-REPLY} message or the {AUTHENTICATION-REJECT} message the PT shall stop the timer <MM_auth.1> and issue a MM_AUTHENTICATE-cfm primitive indicating the outcome from the procedure. The validity of the response shall be checked. If the PT has received an {AUTHENTICATION-REPLY} message, where the <<RES>> information element contains the correct result the PT shall consider the FT authentication as successful.

NOTE 2: A cipher key should not be generated during FT authentication. If generated, it is not used.

The procedure for authenticating a FT is supervised by the timer <MM_auth.1> in the PT. At the first expiry of timer <MM_auth.1> the PT should retransmit the {AUTHENTICATION-REQUEST} message. If the timer <MM_auth.1> expires a second time the PT shall abort the procedure and release the transaction.

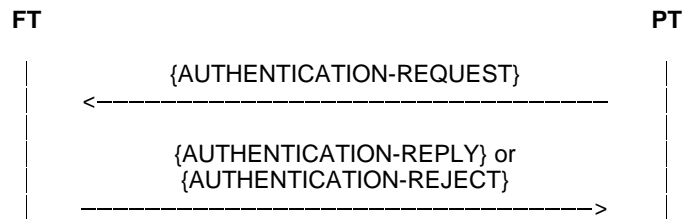


Figure 114: Authentication of a FT

NOTE 3: The procedure for authenticating a FT has the highest priority under the MM procedures and can therefore always be initiated. It restarts the MM timer in the FT of any FT initiated and yet unfinished MM procedure. See also clause 15.5.

13.4 Location procedures

Three location related procedures are defined: location registration (attach), detach and location update.

13.4.1 Location registration

The location registration procedure is used to indicate to the FT where the PT is located in terms of location areas, where a location area consists of part of one or several DECT systems.

The location registration procedure is based on the International Portable User Identity (IPUI) and is only carried out with respect to the IPUI that is active at the time. The location information that has been stored in association with inactive IPUIs is not effected.

NOTE 1: Location registration without changing the location area is referred to as attach, which is the process whereby a PT informs the FT that it is ready to receive incoming calls. Therefore the procedure for attach is the same as described in this clause.

The location registration procedure is used as follows:

Upon receiving a MM_LOCATE-req primitive the PT sends a {LOCATE-REQUEST} message containing the following information elements:

- A <<PORTABLE-IDENTITY>> information element. The portable identity may be either the IPUI or, if the extended higher layer capabilities bit a39 is set to 1, then an assigned individual TPUI may be used. A TPUI may also be used when sending a {LOCATE-REQUEST} in the same location area as a result of expiry of validity of previous location registration if indicated by <<USE-TPUI>> in the previous {LOCATE-ACCEPT}.

NOTE 2: Extended higher layer capabilities bit a39 indicates that at least one of the networks to which an FT may provide access can support access based on TPUIs. It does not indicate that all networks accessible via the FT can support TPUI access.

- If an assigned individual TPUI is used, the FT and/or an associated network, may be unable to determine the identity of the PT, resulting in a {LOCATE-REJECT} message. In this situation the PT shall re-attempt the location registration procedure using the IPUI unless there is a <<reject reason>> indicating that location registration failed for a different reason.

NOTE 3: In some situations there may be more than one PT with the same TPUI. Further procedures to determine the PT identity are required in these situations (e.g. authentication, followed by identity request if authentication fails).

- If the location area has changed, then a <<FIXED-IDENTITY>> information element with the old ARI and a <<LOCATION-AREA>> information element with the old LAL shall be included.
- If the PT has Extended Location Information (ELI), then this shall also be included in the <<LOCATION-AREA>> information element (as LI-Type 11).
- If the PT has a network assigned identity, then this shall be sent within a <<NWK-ASSIGNED-IDENTITY>> information element.

The {LOCATE-REQUEST} message can also contain an optional <<CIPHER-INFO>> information element, an optional <<SETUP-CAPABILITY>> information element, an optional <<TERMINAL-CAPABILITY>> information element and an optional <<IWU-TO-IWU>> information element. The timer <MM_locate.1> is started.

Upon receiving a {LOCATE-REQUEST} message the FT issues a MM_LOCATE-ind primitive. Upon receiving a MM_LOCATE-res primitive indicating "accept" the FT shall respond with a {LOCATE-ACCEPT} message containing the <<LOCATION-AREA>> information element with the location area level, a <<PORTABLE-IDENTITY>> information element with a new assigned individual TPUI of the PT an optional <<SETUP-CAPABILITY>> information element and an optional <<NWK-ASSIGNED-IDENTITY>> information element with a network assigned identity. If the FT is capable of dealing with call setup attempts using temporary identities, it should also include the <<USE TPUI>> information element. A <<USE TPUI>> information element only applies to the active IPUI/PARK pair.

If the FT does not want to assign TPUI it shall include the <<PORTABLE-IDENTITY>> information element with zero length contents (octet 2 = 0).

If the portable receives a <<Portable identity>> with zero length contents (octet 2 = 0), it shall maintain its currently assigned TPUI. If no TPUI has been previously assigned, it shall use its default TPUI.

The message can also contain an optional <<DURATION>> information element, which may define for how long at least the location registration and the temporary identities, if provided, are valid. Optionally an <<IWU-TO-IWU>> information element can also be included in the {LOCATE-ACCEPT} message. If a TPUI or NWK assigned identity is included, then the {LOCATE-ACCEPT} message is used to start the procedure for temporary identity assignment as described in clause 13.2.2. FT shall start timer <MM_ident.1>. Upon receiving a MM_LOCATE-res primitive indicating "reject" the FT shall respond with a {LOCATE-REJECT} message containing the optional <<REJECT-REASON>> information element.

Upon receipt of the {LOCATE-ACCEPT} message or the {LOCATE-REJECT} message the PT shall stop the timer <MM_locate.1>. The PT issues a MM_LOCATE-cfm primitive. If a correct {LOCATE-ACCEPT} message has been received, the PP shall consider the location registration as successful and shall store the received location information. If the {LOCATE-ACCEPT} message contains a TPUI or/and a network assigned identity, then the PP shall consider this as a temporary identity assignment, and shall respond according to the identity assignment criteria defined in clause 13.2.2. If it can accept the assignment, it shall store the identities and send back a MM_IDENTITY_ASSIGN-res primitive indicating "Accept" reflecting in a {TEMPORARY-IDENTITY-ASSIGN-ACK} message sent to the FT as described in clause 13.2.2. If it cannot accept the assignment, it shall send back a MM_IDENTITY_ASSIGN-res primitive indicating "Reject" reflecting in a {TEMPORARY-IDENTITY-ASSIGN-REJ} message as described in clause 13.2.2. On receipt of a {TEMPORARY-IDENTITY-ASSIGN-ACK} message or a {TEMPORARY-IDENTITY-ASSIGN-REJ} message as described in clause 13.2.2 FT issues a MM_IDENTITY_ASSIGN-cfm primitive indicating the outcome of the assignment. On receipt of {TEMPORARY-IDENTITY-ASSIGN-ACK} message or {TEMPORARY-IDENTITY-ASSIGN-REJ} message the FT shall stop timer <MM_identity.1>. If timer <MM_ident.1> expires, the FT shall abort the procedure and release the transaction.

The complete location registration procedure shall be treated as a single transaction, even when it includes an identity assignment, see clause H.3.2.

If a {LOCATE-REJECT} message has been received containing a <<DURATION>> information element, then the PT shall not initiate this procedure within this location area again before the defined time has passed. If the <<DURATION>> element indicates "Standard time limit" or cannot be understood, the PT shall wait a minimum of <MM_wait> minutes. The time starts with the reception of the {LOCATE-REJECT} message.

The location registration procedure is supervised by the timer <MM_locate.1> in the PT. At the first expiry of timer <MM_locate.1> the PT should retransmit the {LOCATE-REQUEST} message. If the timer <MM_locate.1> expires a second time the PT shall abort the procedure and release the transaction. Timer <MM_locate.1> may be restarted by the FT at any time by sending a <<TIMER-RESTART>> information element in a {MM-NOTIFY} message.

NOTE 4: Restarting of the timer may be required if the Location registration procedure involves communication with external networks or protocols before accepting or rejecting it.

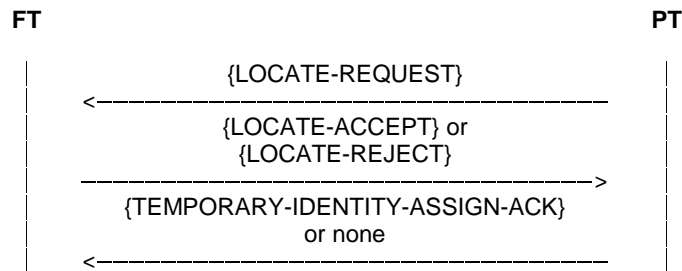


Figure 115: Location registration

NOTE 5: For fast set up also location registration is needed. In this case the size of the location area is one cell.

13.4.2 Detach

Detach is the process whereby a PT informs the FT that it is not ready to receive incoming calls.

NOTE 1: Location registration without changing the location area is referred to as "attach". Therefore the procedure for attach is the same as described in clause 13.4.1 for location registration.

The detach procedure is used as follows:

Upon receiving a MM_DETACH-req primitive the PT sends a {DETACH} message, containing the <<PORTABLE-IDENTITY>> information element with its IPUI or individual assigned TPUI. If the PT has got a network assigned identity, then this identity shall also be included, using a <<NWK-ASSIGNED-IDENTITY>> information element. Optionally an <<IWU-TO-IWU>> information element can also be included.

Upon receiving a {DETACH} message the FT issues a MM_DETACH-ind primitive.




Figure 116: Detach

NOTE 2: This message should have been preceded by a {LOCATE-REQUEST} message.

13.4.3 Location update

Location update is used by the FT to inform the PT of a modification of the location areas.

The location update procedure is used as follows:

Upon receiving a MM_INFO-req primitive the FT sends a {MM-INFO-SUGGEST} message, which contains an <<INFO-TYPE>> information element with the parameter type "locate suggest". Optionally an <<IWU-TO-IWU>> information element can be included.

Upon receipt of the {MM-INFO-SUGGEST} message the PT issues a MM_INFO-ind primitive. If the parameter type "locate suggest" is indicated in the <<INFO-TYPE>> information element, the PT shall initiate the location registration procedure as described in clause 13.4.1.




Figure 117: Location update

The locate suggest and the following location registration procedure shall be treated as two different transactions, see clause H.3.1.

13.5 Access rights procedure

13.5.1 Obtaining the access rights

The procedure for obtaining the access rights is used to load the International Portable User Identity (IPUI), the Portable Access Rights Key (PARK) and other service specific information into the PT.

The PT can then use the knowledge to:

- gain access to the system and make calls;
- recognize the system in order to receive calls.

The FT can then use the knowledge to:

- validate service requests from the PT;
- allow certain classes of service; and
- recognize calls for valid PTs in order to route calls to them.

If the access rights procedure is not supported by the FT, as indicated in the broadcast attributes and as defined in annex F, than the PT shall not initiate this procedure.

Procedure for obtaining the access rights:

Upon receiving a MM_ACCESS_RIGHTS-req primitive the PT initiates the procedure by sending an {ACCESS-RIGHTS-REQUEST} message and starts the timer <MM_access.1>. The {ACCESS-RIGHTS-REQUEST} message contains a <<PORTABLE-IDENTITY>> information element with an international portable user identity, e.g. IPUI type N with the portable's equipment number. The message can also contain an optional <<AUTH-TYPE>> information element, an optional <<CIPHER-INFO>> information element, an optional <<SETUP-CAPABILITY>> information element, an optional <<TERMINAL-CAPABILITY>> information element and an optional <<IWU-TO-IWU>> information element.

Upon receiving a {ACCESS-RIGHTS-REQUEST} message the FT issues a MM_ACCESS_RIGHTS-ind primitive. Upon receiving a MM_ACCESS_RIGHTS-res primitive indicating "accept" the FT shall respond by sending an {ACCESS-RIGHTS-ACCEPT} message containing a <<PORTABLE-IDENTITY>> information element with an international portable user identity and an <<FIXED-IDENTITY>> information element with the portable access rights key. Optionally a list of <<FIXED-IDENTITY>> information elements with further portable access rights keys can be included. Further optional information elements are the <<LOCATION-AREA>> information element with the location area level, the <<AUTH-TYPE>> information element which indicates the authentication algorithm and key, the <<CIPHER-INFO>> information element which indicates the cipher algorithm, the <<SETUP-CAPABILITY>> information element which communicates some dynamic parameters, the <<ZAP-FIELD>> information element with the ZAP value, the <<SERVICE-CLASS>> information element which defines the allowed service, and key and the <<IWU-TO-IWU>> information element with operator specific information.

NOTE: For sending the user authentication key over the air the key allocation procedure can be used. That procedure needs a first key, e.g. an authentication code which could be keyed in.

Upon receiving a MM_ACCESS_RIGHTS-res primitive indicating "reject" the FT shall respond by sending an {ACCESS-RIGHTS-REJECT} message containing the optional <<REJECT-REASON>> information element.

Upon receipt of the {ACCESS-RIGHTS-ACCEPT} message or the {ACCESS-RIGHTS-REJECT} message the PT shall stop the timer <MM_access.1>. The PT issues a MM_ACCESS_RIGHTS-cfm primitive. If an {ACCESS-RIGHTS-ACCEPT} message has been received the PT shall store the received information.

If an {ACCESS-RIGHTS-REJECT} message has been received containing a <<DURATION>> information element, then the PT shall not initiate this procedure within this location area again before the defined time has passed. If the <<DURATION>> element cannot be understood or indicates "standard time limit" the PT shall wait a minimum of <MM_wait> minutes. The time starts with the reception of the {ACCESS-RIGHTS-REJECT} message.

The procedure for obtaining access rights is supervised by the timer <MM_access.1> in the PT. At the first expiry of timer <MM_access.1> the PT should retransmit the {ACCESS-RIGHTS-REQUEST} message. If the timer <MM_access.1> expires a second time the PT shall abort the procedure and release the transaction.

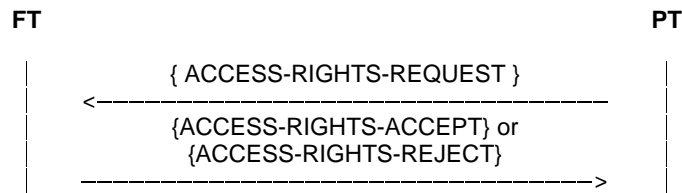


Figure 118: Obtaining of Access Rights

13.5.2 Termination of access rights

The procedure for terminating the access rights is used to remove a specific International Portable User Identity (IPUI) and all information which is related to this IPUI from the PT and FT.

The PT is then unable to:

- gain access to the system and make calls;
- recognize the system in order to receive calls.

The FT is then unable to:

- validate service requests from the PT and allow certain classes of service;
- recognize calls for valid PTs in order to route calls to them.

Procedure for terminating access rights initiated by the PT:

Upon receiving a MM_ACCESS_RIGHTS_TERMINATE-req primitive the PT initiates the procedure by sending an {ACCESS-RIGHTS-TERMINATE-REQUEST} message containing the <<PORTABLE-IDENTITY>> information element with the IPUI. The message can also contain an optional <<FIXED-IDENTITY>> information element with a portable access rights key and an optional <<IWU-TO-IWU>> information element. The timer <MM_access.2> is started.

Upon receipt of an {ACCESS-RIGHTS-TERMINATE-REQUEST} message the FT issues a MM_ACCESS_RIGHTS_TERMINATE-ind primitive. The FT may receive a MM_AUTHENTICATE-req primitive triggering the authentication the PT procedure before the terminate access rights request is answered - in this case termination of access rights procedure and authentication procedure shall be treated as nested procedures, see clause H.2. If authentication of the PT is not successful, termination of access rights request should be rejected. If the {ACCESS-RIGHTS-TERMINATE-REQUEST} message contains a PARK, then the erasure of only this PARK is requested. If the {ACCESS-RIGHTS-TERMINATE-REQUEST} message contains no PARK, then the erasure of the IPUI and all data associated with this IPUI is requested. If the FT receives a MM_ACCESS_RIGHTS_TERMINATE-res primitive indicating "accept", then the FT shall respond by sending an {ACCESS-RIGHTS-TERMINATE-ACCEPT} message. If the FT receives a MM_ACCESS_RIGHTS_TERMINATE-res primitive indicating "reject", then the FT shall respond by sending an {ACCESS-RIGHTS-TERMINATE-REJECT} message containing the optional <<REJECT-REASON>> information element.

Upon receipt of an {ACCESS-RIGHTS-TERMINATE-ACCEPT} message or an {ACCESS-RIGHTS-TERMINATE-REJECT} message the PT shall stop the timer <MM_access.2>. The PT issues a MM_ACCESS_RIGHTS_TERMINATE-cfm primitive. If an {ACCESS-RIGHTS-TERMINATE-ACCEPT} message has been received, the PT shall consider the termination of access rights as successful and delete the same data in the PP that the former {ACCESS-RIGHTS-TERMINATE-REQUEST} message requested to be deleted.

If an {ACCESS-RIGHTS-TERMINATE-REJECT} message has been received it shall be understood as the required data has not been deleted.

If an {ACCESS-RIGHTS-TERMINATE-REJECT} message has been received containing a <<DURATION>> information element, then the PP shall not initiate this procedure within this location area again before the defined time has passed. If the <<DURATION>> element indicates "standard time limit" or cannot be understood the PP shall wait a minimum of <MM_wait> minutes. The time starts with the reception of the {ACCESS-RIGHTS-TERMINATE-REJECT} message.

The PT initiated procedure for termination of access rights is supervised by the timer <MM_access.2> in the PT. At the first expiry of timer <MM_access.2> the PT should retransmit the {ACCESS-RIGHTS-TERMINATE-REQUEST} message. If the timer <MM_access.2> expires a second time the PT shall abort the procedure and release the transaction.



Figure 119: PT termination of access rights

Procedure for termination of access rights initiated by the FT:

Upon receiving a MM_ACCESS_RIGHTS_TERMINATE-req primitive the FT initiates the procedure by sending a {ACCESS-RIGHTS-TERMINATE-REQUEST} message containing the <<PORTABLE-IDENTITY>> information element with the IPUI. The message can also contain an optional <<FIXED-IDENTITY>> information element with a portable access rights key and an optional <<IWU-TO-IWU>> information element. The timer <MM_access.2> is started.

Upon receipt of the {ACCESS-RIGHTS-TERMINATE-REQUEST} message the PT issues a MM_ACCESS_RIGHTS_TERMINATE-ind primitive. The PP should authenticate the FT - in this case termination of access rights procedure and authentication procedure shall be treated as nested procedures, see clause H.2. If the authentication of the FT fails, then the PP should send an ACCESS-RIGHTS-TERMINATE-res indicating "Reject" resulting in an {ACCESS-RIGHTS-TERMINATE-REJECT} message containing the optional <<REJECT-REASON>> information element. Otherwise the PP shall, if the {ACCESS-RIGHTS-TERMINATE-REQUEST} message contains a PARK, erase this PARK and all data associated with this PARK and if the message contains no PARK, erase the IPUI and all data associated with this IPUI and send an MM_ACCESS_RIGHTS_TERMINATE-res indicating "Accept" resulting in an {ACCESS-RIGHTS-TERMINATE-ACCEPT} message being sent back to the FT.

Upon receipt of the {ACCESS-RIGHTS-TERMINATE-ACCEPT} message or the {ACCESS-RIGHTS-TERMINATE-REJECT} message the FT shall stop the timer <MM_access.2>. The FT issues a MM_ACCESS_RIGHTS_TERMINATE-cfm primitive. If an {ACCESS-RIGHTS-TERMINATE-ACCEPT} message has been received, the FT shall consider the termination of access rights as successful.

The FT initiated procedure for termination of access rights is supervised by the timer <MM_access.2> in the FT. At the first expiry of timer <MM_access.2> the FT should retransmit the {ACCESS-RIGHTS-TERMINATE-REQUEST} message. If the timer <MM_access.2> expires a second time the FT shall abort the procedure and release the transaction.



Figure 120: FT termination of access rights

13.5.3 Modification of access rights

Modification of access rights procedure is used by the FT to modify access rights stored in the PT without user intervention.

Procedure for modification of access rights:

Upon receiving a MM_INFO-req primitive the FT sends a {MM-INFO-SUGGEST} message, which contains an <<INFO-TYPE>> information element with the parameter type "access rights modify suggest".

Upon receipt of the {MM-INFO-SUGGEST} message the PT issues a MM_INFO-ind primitive. If the parameter type "access rights modify suggest" is indicated in the <<INFO-TYPE>> information element, the PT shall initiate the obtaining of access rights procedure as described in clause 13.5.1. Prior to this the PT should perform authentication of a FT as described in clause 13.3.3.

If obtaining the access rights procedure fails, the PT shall leave the access rights parameters unchanged.

13.6 Key allocation procedure

Upon receiving a MM_KEY_ALLOCATE-req primitive the FT initiates the procedure by sending a {KEY-ALLOCATE} message which shall contain the <<ALLOCATION-TYPE>> information element which indicates the Authentication algorithm identifier, the Authentication Code (AC) number to be used and the User Authentication Key (UAK) number to be derived. The message shall also contain the <<RAND>> information element with the 64-bit random number, RAND-F, and the <<RS>> information element with the 64-bit number RS. The timer <MM_key.1> is started.

NOTE 1: The authentication code which is used in this procedure should be as long as possible, at least 32 bits, but better if 64 bits or more are used.

Upon receipt of the {KEY-ALLOCATE} message the PT issues an MM_KEY_ALLOCATE-ind primitive. If the <<ALLOCATION-TYPE>> element is acceptable the PT shall use the indicated authentication code and the received numbers, RS and RAND-F, to calculate the authentication result RES1. The PT shall start timer <MM_auth.1> and respond by sending an {AUTHENTICATION-REQUEST} message including the <<AUTH-TYPE>> information element with the same parameters (Authentication algorithm identifier, Authentication Key (AK) type indicating AC, Authentication Code (AC) number) as indicated in the received <<ALLOCATION-TYPE>> information element. The PT shall also include the <<RES>> information element with the calculated result RES1 and the <<RAND>> information element with a 64-bit random number, RAND-P. If the received <<ALLOCATION-TYPE>> element is unacceptable the PT shall respond by sending an {AUTHENTICATION-REJECT} message.

Upon receipt of the {AUTHENTICATION-REJECT} message the FT shall stop the timer <MM_key.1> and consider that the key allocation procedure has failed.

Upon receipt of the {AUTHENTICATION-REQUEST} message the FT shall stop the timer <MM_key.1>. The value XRES1 is computed in the FT from the indicated authentication code, RAND-F and RS. The authentication of PT is considered as successful if $RES1 = XRES1$. If it is successful the FT shall use the original RS, the AC and the received random number RAND-P to calculate the authentication result, RES2. The FT shall store the reverse session key, KS', as new user authentication key under the UAK-number which was given in the <<ALLOCATION-TYPE>> information element in the {KEY-ALLOCATE} message. The FT marks the new UAK with "unconfirmed status". The FT shall respond by sending an {AUTHENTICATION-REPLY} message which contains the <<RES>> information element with the calculated result RES2. If the "authentication of the PT has failed", the FT shall respond by sending an {AUTHENTICATION-REJECT} message.

Upon receipt of the {AUTHENTICATION-REJECT} message the PT shall stop the timer <MM_auth.1> and consider that the key allocation procedure as failed.

Upon receipt of the {AUTHENTICATION-REPLY} message the PT shall stop the timer <MM_auth.1>. The value XRES2 is computed in the PT from the indicated authentication code, RAND-P and the original RS. The authentication of FT is considered as successful if $RES2 = XRES2$. If it is successful the PT shall store the reverse session authentication key, KS', as new user authentication key under the UAK-number which was given in the <<ALLOCATION-TYPE>> information element in the {KEY-ALLOCATE} message and erase the used Authentication Code, AC. If the authentication of the FT has failed the PT shall retain the AC, and drop the call.

NOTE 2: The reverse Session authentication Key, KS', is an intermediate result during the calculation of RES2. Refer also to EN 300 175-7 [6].

The FT shall keep the Authentication Code (AC), and shall try to use the UAK with "unconfirmed status" in a future PT authentication procedure. If this future authentication of the PT succeeds, then also the FT shall erase the AC, and the UAK will now obtain the "confirmed status". If it fails the FT shall delete this UAK.

The key allocation procedure is supervised by the timer <MM_key.1> in the FT and by the timer <MM_auth.1> in the PT. At the first expiry of timer <MM_key.1> the FT should re transmit the {KEY-ALLOCATE} message. If the timer <MM_key.1> expires a second time the FT shall abort the procedure and release the transaction. If the timer <MM_auth.1> expires the PT shall abort the procedure and release the transaction.

Successful case:

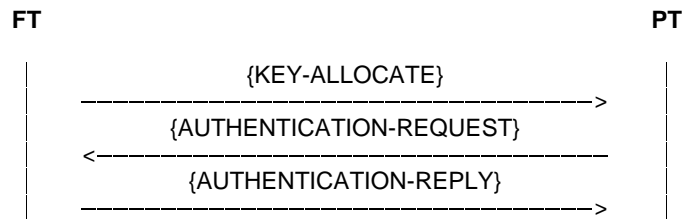


Figure 121: Successful key allocation procedure

Unsuccessful case:

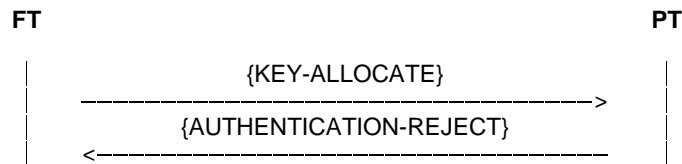


Figure 122: Unsuccessful key allocation procedure

This procedure shall not be used for roaming key allocation in a visited network.

NOTE 3: A possibility for roaming key allocation is that the visited system obtains a Session Key KS with the corresponding value RS from the home system. It can then use this session key for the authentication procedures whereas the PT can use its standard user authentication key together with RS and RAND to calculate the authentication result as normal. Refer also to EN 300 175-7 [6].

The complete key allocation procedure shall be treated as a single transaction, see clause H.3.4.

13.7 Parameter retrieval procedure

This procedure is used to exchange information between the FT and the PT. This information could be necessary for example for an external handover, where after having obtained this information the actual handover is done by the interworking unit via the call control entity and is not described in this clause. The procedure can be initiated by the FT or by the PT.

Procedure for parameter retrieval initiated by the FT:

Upon receiving a MM_INFO-req primitive the FT initiates the procedure by sending a {MM-INFO-SUGGEST} message. This message contains the <<INFO-TYPE>> information element which defines the suggested action. The coding "locate suggest" is used in the case of the location updating procedure which is described in clause 13.4.3. One of the codings "external handover parameters", "location area", "hand over reference", "external handover candidate", "synchronized external handover candidate" and "non synchronized external handover candidate" is used for the external handover procedure which is described in clause 15.7.

The {MM-INFO-SUGGEST} message can optionally also contain the following information elements:

| | |
|---------------------------|---|
| <<FIXED-IDENTITY>> | with the ARI of a proposed new FT; |
| <<LOCATION-AREA>> | with the identification of the current location area (extended location information); |
| <<SETUP-CAPABILITY>> | communicating some dynamic parameters; |
| <<NWK-ASSIGNED-IDENTITY>> | with a network assigned identity; |
| <<NETWORK-PARAMETER>> | with the value of a handover reference; |
| <<IWU-TO-IWU>> | with application specific information. |

Upon receipt of the {MM-INFO-SUGGEST} message the PT issues this information directly to the IWU by issuing a MM_INFO-ind primitive.




Figure 123: FT parameter retrieval procedure

Procedure for parameter retrieval initiated by the PT:

Upon receiving a MM_INFO-req primitive the PT initiates the procedure by sending a {MM-INFO-REQUEST} message, which contains an <<INFO-TYPE>> information element which defines the requested parameter(s) and can contain a <<PORTABLE-IDENTITY>> information element with the IPUI or individual assigned TPUI, an optional <<FIXED-IDENTITY>> information element containing ARI or PARKs identifying candidate FPs, an optional <<LOCATION-AREA>> information element with a new location area identification (extended location information), an optional <<NWK-ASSIGNED-IDENTITY>> information element with a network assigned identity, an optional <<NETWORK-PARAMETER>> information element with the value of a handover reference and an optional <<IWU-TO-IWU>> information element.

Upon receiving a {MM-INFO-REQUEST} message the FT issues a MM_INFO-ind primitive. Upon receiving a MM_INFO-res primitive indicating "accept" the FT shall respond by sending a {MM-INFO-ACCEPT} message, which can include an <<INFO-TYPE>> information element which gives some more information about specific requested parameter(s), an optional <<FIXED-IDENTITY>> information element with the ARI of a new FT, an optional <<LOCATION-AREA>> information element with the current location area identification (extended location information), an optional <<NWK-ASSIGNED-IDENTITY>> information element with a network assigned identity, an optional <<NETWORK-PARAMETER>> information element with the value of a handover reference and an optional <<IWU-TO-IWU>> information element. Upon receiving a MM_INFO-res primitive indicating "reject" the FT shall respond by sending a {MM-INFO-REJECT} message containing the optional <<REJECT-REASON>> information element.

Upon receiving a {MM-INFO-ACCEPT} message or a {MM-INFO-REJECT} message the PT issues a MM_INFO-cfm primitive.

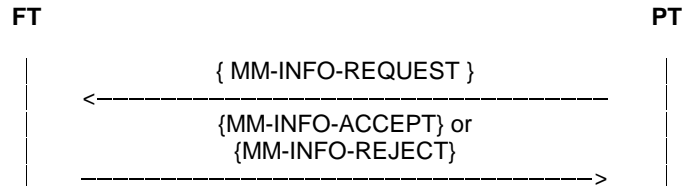


Figure 124: PT parameter retrieval procedure

The parameter retrieval procedure is supervised by the timer <MM_info.1> in the PT. At the first expiry of the timer <MM_info.1> the PT should retransmit the {MM-INFO-REQUEST} message. If the timer <MM_info.1> expires a second time, the PT shall abort the procedure and release the transaction. Timer <MM_info.1> may be restarted by the FT at any time by sending a <<TIMER-RESTART>> information element in a {MM-NOTIFY} message.

NOTE: Restarting of the timer may be required if the Parameter retrieval procedure involves communication with external networks or protocols before accepting or rejecting it.

13.8 Ciphering related procedure

This procedure is initiated by the FT or PT and is used to engage or disengage ciphering and in the case of engaging ciphering to define the cipher parameters.

NOTE: The real time start and stop of ciphering is done in the MAC layer and is always initiated by the PT.

Procedure for cipher-switching initiated by the FT:

Upon receiving a MM_CIPHER-req primitive the FT initiates the procedure by sending a {CIPHER-REQUEST} message to the PT. The {CIPHER-REQUEST} message contains a <<CIPHER-INFO>> information element with the clear/cipher flag and the identification of the cipher algorithm and cipher key. The message can also contain an optional <<CALL-IDENTITY>> information element, which identifies the call for which ciphering shall be engaged or disengaged, and an optional <<CONNECTION-IDENTITY>> information element, which identifies the connection where ciphering shall be engaged or disengaged. If neither the <<CALL-IDENTITY>> information element nor the <<CONNECTION-IDENTITY>> information element is included, then cipher-switching shall relate to all existing calls/connections between the FT and PT. Optionally an <<IWU-TO-IWU>> information element can be included. The cipher key is transferred with a DL_ENC_KEY.req primitive to the lower layer and the timer <MM_cipher.1> is started.

Upon receipt of the {CIPHER-REQUEST} message the PT issues a MM_CIPHER-ind primitive. The PT checks the clear/cipher flag and if it supports the indicated cipher algorithm and cipher key. The response of the PT is as indicated in table 83.

Table 83: Response to cipher switching initiated by the FT

| | | Current state | |
|--|----------|--|---|
| | | clear | ciphered |
| Wanted state | clear | none | EITHER Ciphering is disabled at the MAC layer OR {CIPHER-REJECT} message is sent to the FT (reject reason = incompatible service) |
| | ciphered | IF requested ciphering supported THEN a DL_ENCRYPT req primitive is issued to the DLC layer ELSE {CIPHER-REJECT} message is sent to the FT (reject reason = "no cipher algorithm" or "cipher algorithm not supported" or "cipher key not supported") | none (see note) |
| NOTE: A change of the cipher parameters of an existing and already ciphered connection is not supported. It is however possible to switch, to clear, and to start ciphering with new parameters. | | | |

If the PT (upon receipt of an MM_CIPHER-res primitive indicating "Reject") responds by sending an {CIPHER-REJECT} message, then this message may contain one or a prioritized list of the optional <<CIPHER-INFO>> information element to propose an alternative algorithm or key and an optional <<REJECT-REASON>> information element.

Upon receipt of a DL_ENCRYPT.ind primitive from the lower layer or a {CIPHER-REJECT} message from the PT the FT shall stop the timer <MM_cipher.1>. The FT issues a MM_CIPHER-cfm primitive.

If a {CIPHER-REJECT} message has been received the FT can:

- a) release the call; or
- b) proceed in the existing mode.

In the case, that switching from clear to ciphered was requested, the FT has the following additional two options:

- a) if the reject reason "cipher algorithm not supported" or the reject reason "cipher key not supported" was included, then the FT can send a new {CIPHER-REQUEST} message with a new <<CIPHER-TYPE>> information element. This element may have been received in the {CIPHER-REJECT} message;
- b) if the reject reason "cipher key not supported" was included, then the FT can perform "authentication of the PT" (and thereby establish a new cipher key) and then send a new {CIPHER-REQUEST} message.

The procedure for FT initiated cipher-switching is supervised by the timer <MM_cipher.1> in the FT. At the first expiry of timer <MM_cipher.1> the FT should retransmit the {CIPHER-REQUEST} message. If the timer <MM_cipher.1> expires a second time the FT shall abort the procedure and release the transaction.

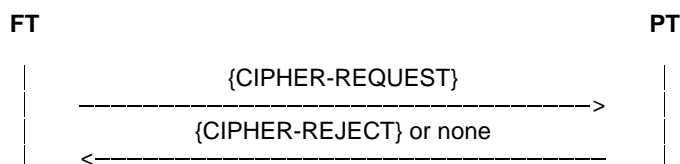


Figure 125: FT cipher switching

Procedure for cipher-switching initiated by the PT:

Upon receiving a MM_CIPHER-req primitive the PT initiates the procedure by sending a {CIPHER-SUGGEST} message to the FT. The {CIPHER-SUGGEST} message contains a <<CIPHER-INFO>> information element with the clear/cipher flag and the identification of the cipher algorithm and cipher key. The message can also contain an optional <<CALL-IDENTITY>> information element, which identifies the call for which ciphering shall be engaged or disengaged, and an optional <<CONNECTION-IDENTITY>> information element, which identifies the connection where ciphering shall be engaged or disengaged. If neither the <<CALL-IDENTITY>> information element nor the <<CONNECTION-IDENTITY>> information element is included, then cipher-switching shall relate to all existing calls/connections between the FT and PT. Optionally an <<IWU-TO-IWU>> information element can be included. The timer <MM_cipher.2> is started.

Upon receipt of the {CIPHER-SUGGEST} message the FT issues an MM_CIPHER-ind primitive to the IWU. The response of the FT is as indicated in the following table and depends on the "Accept/Reject flag" in the received MM_CIPHER-res primitive reflecting whether the requested service is supported.

Table 84: Response to cipher switching initiated by the PT

| | | Current state | |
|--|----------|--|---|
| | | clear | ciphered |
| Wanted | clear | none | If clear is allowed THEN the "procedure for cipher-switching initiated by the FT" is started by sending {CIPHER-REQUEST} message ELSE {CIPHER-REJECT} message is sent to the PT |
| state | ciphered | If requested ciphering supported THEN the "procedure for cipher-switching initiated by the FT" is started, sending {CIPHER-REQUEST} message ELSE {CIPHER-REJECT} message is sent to the PT | none (see note) |
| NOTE: A change of the cipher parameters of an existing and already ciphered connection is not supported. It is however possible to switch to clear and to start ciphering with new parameters. | | | |

Upon receipt of a {CIPHER-REQUEST} message or a {CIPHER-REJECT} message from the FT the PT shall stop the timer <MM_cipher.2>. If a {CIPHER-REQUEST} message has been received, then the PT shall respond as described in the "procedure for cipher-switching initiated by the FT".

If a {CIPHER-REJECT} message has been received, then the PT can either release the call or proceed in the existing mode. In this case the PT issues a MM_CIPHER-cfm primitive indicating "reject".

The procedure for PT initiated cipher-switching is supervised by the timer <MM_cipher.2> in the PT. At the first expiry of timer <MM_cipher.2> the PT should retransmit the {CIPHER-SUGGEST} message. If the timer <MM_cipher.2> expires a second time the PT shall abort the procedure and release the transaction.

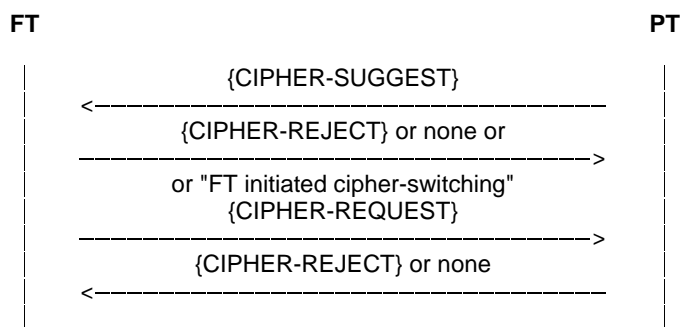


Figure 126: PT cipher switching

The complete procedure for cipher-switching initiated by the PT shall be treated as a single transaction, see clause H.3.3.

13.9 External protocol information procedure

This is used to exchange information between the FT and the PT.

The procedure can be initiated by the FT or by the PT.

13.9.1 Procedure for external protocol information initiated by the FT

Upon receiving a MM_IWU-req primitive the FT initiates the procedure by sending a {MM-IWU} message. This message may contain the optional information elements <<Repeat Indicator>>, <<IWU-TO-IWU>>, <<IWU-PACKET>> and <<Escape to Proprietary>>.

Upon receipt of the {MM-IWU} message the PT issues this information directly to the IWU by issuing a MM_IWU-ind primitive.




Figure 126a: FT external protocol information procedure

13.9.2 Procedure for external protocol information initiated by the PT

Upon receiving a MM_IWU-req primitive the PT initiates the procedure by sending a {MM-IWU} message. This message may contain the optional information elements <<Repeat Indicator>>, <<IWU-TO-IWU>>, <<IWU-PACKET>> and <<Escape to Proprietary>>.

Upon receiving a {MM-IWU} message the FT issues a MM_IWU-ind primitive.




Figure 126b: PT external protocol information procedure

13.9.3 Segmentation of information in MM procedures

For the completion of any MM procedure the exchange of large amount of IWU information may be required. To avoid the need for DLC segmentation of the NWK layer's PDU carrying the MM message the IWU information may be segmented into a number of MM messages.

Segmentation may be applied if the MM message that is to carry the IWU information exceeds the following limits:

DOWNLINK: 58 octets;

UPLINK: 58 octets for full slot operation.

NOTE 1: These lower limits are chosen because the maximum information length of a LAPC UI frame, see EN 300 175-4 [4] is 63 octets.

Segmentation may be used in any MM procedure. The service data shall be segmented into two or more messages, and these messages shall be transmitted independently. The first segment shall be carried by a MM message belonging to the procedure, whereas the second and following segments shall be carried in one or more {MM-IWU} messages. In this case the External protocol information procedure shall be considered as part of the running MM procedure. The {MM-IWU} messages shall use the TI as the message that carries the first segment (see annex H for more information).

If the service data is segmented, each message shall contain the <<SEGMENTED-INFO>> information element, together with a duplicate of all of the mandatory elements. Each message should contain the maximum amount of service data (of IWU/user information).

The MM shall then deliver the resulting message (or series of messages) in sequence to the LCE for immediate delivery. Sending/reception of a {MM-IWU} message carrying a segmented information shall trigger restart of the running MM procedure's timer.

Upon receipt of a MM message that contains the <<SEGMENTED-INFO>> element the MM shall store (buffer) the complete message. Each (segmented) message shall be stored for a maximum of <MM_segment.1> seconds. Whenever a new segmented message is received, the MM shall attempt to construct a complete message using all stored segmented messages. Any duplicated segmented messages should be discarded.

A complete message shall be identified by the receipt of all of the segments as indicated in the <<SEGMENTED-INFO>> elements. Upon detection of a complete series of segments, the MM shall map the elements into the parameters of the relevant to the MM procedure message primitive. Duplicated mandatory elements and all <<SEGMENTED-INFO>> elements shall be discarded, and the individual <<IWU-TO-IWU>> and/or <<IWU-PACKET>> elements shall be concatenated into a single message unit parameter.

NOTE 2: The <<SEGMENTED-INFO>> element in each segmented message indicates the total number of segments belonging to the complete message, plus the number of segments remaining. The latter field should be used to sequence the segments.

An example of segmentation used in a Parameter retrieval procedure is provided on figure 126c.

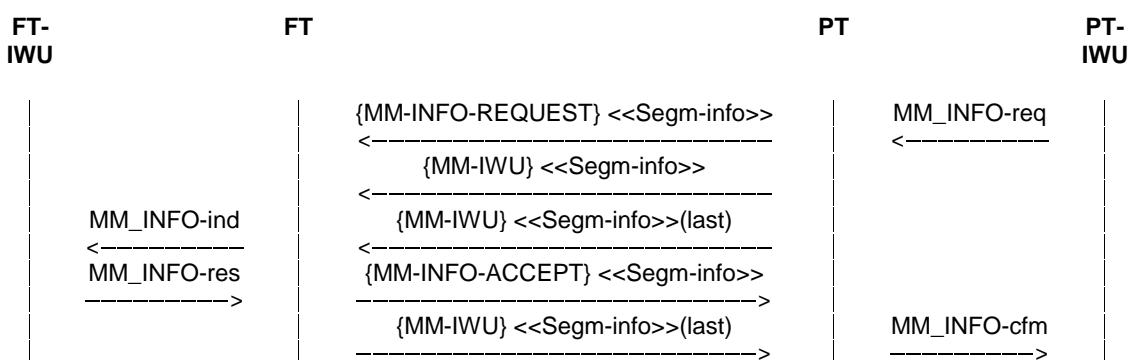


Figure 126c: External protocol information procedure used for segmentation

14 Link Control Entity (LCE) procedures

14.1 General

The Link Control Entity (LCE) is the lowest entity in the NWK layer, and all messages to and from the higher entities pass through the LCE. There is a single LCE at both the FT and the PT.

The LCE in the FT controls independent links for each PT. The main function of this single LCE is the message routing task: there is no other interaction between the links. All the LCE procedures are described in terms of one link, and multiple instances of these procedures may be required for a complete FT implementation.

NOTE 1: The following procedures describe the message routing task in terms of two identities: IPUI and TPUI. This task implies a requirement for a local "LCE routing table" that contains the legal IPUI/TPUI associations. The procedures for the creation and management of this table are not defined in the present document.

Each connection oriented link (each Class U, Class A or Class B value of LLN for every PT) can exist in one of four states. A pictorial overview of these states is given in annex C:

- "LINK RELEASED": the link is fully released.
- "LINK ESTABLISHED": the link is fully established, with a defined class of operation.
- "ESTABLISH PENDING": link establishment has been requested, but has not yet been confirmed.
- "RELEASE PENDING": link release has been requested, but has not yet been confirmed.

Each Class B link may support three additional states:

- "LINK SUSPENDED": the link is fully suspended.
- "SUSPEND PENDING": link suspend has been requested, but has not yet been confirmed.
- "RESUME PENDING": link resume has been requested, but has not yet been confirmed.

Each connectionless link (Class U only) can only exist in one state.

NOTE 2: Refer to EN 300 175-4 [4] for a description of Class U, Class A and Class B links.

The LCE operation is described in two groups of procedures:

- a) connection orientated link control;
- b) connectionless link control.

14.2 Connection oriented link control procedures

14.2.1 Link establishment

The connection oriented link control procedures are concerned with the establishment, the maintenance, the optional suspension/resumption and the release of one or more DLC C-plane links to each PT, whenever there is a demand from a higher NWK layer entity. The message from each higher layer instance shall only be routed via one link, but multiple instances may share a single link, or may use separate links.

Each C-plane link shall only be maintained while there are continued demands from the higher entities. When these demands cease (i.e. when all relevant calls are released), the LCE shall release the associated DLC link(s).

The LCE shall immediately (re) establish a DLC C-plane link, in response to the arrival of a message from any of the higher entities. This establishment of a C-plane link is the most complex part of the LCE operation. Three establishment procedures are described:

- direct PT initiated link establishment;
- indirect (paged) FT initiated link establishment;
- direct FT initiated link establishment.

NOTE: The operation of the link establishment procedures may be dependent on stored information relating to the capabilities of PTs. This information storage is described as a "LCE location table" in the following clauses. The structure of this table is not defined in the present document.

Additional messages may be queued at the originating LCE during this setup phase.

If a higher entity releases a call, whilst the initial messages are still queued (i.e. if the link is in the "ESTABLISH PENDING" state), the queued messages shall be discarded, and the link establishment shall be immediately terminated by issuing a DL_RELEASE-req primitive to the DLC layer.

14.2.2 Direct PT initiated link establishment

Direct PT initiated link establishment shall occur when the first service request is detected by the LCE in the PT. The LCE queues (stores) the associated messages, and shall issue a DL_ESTABLISH-req primitive via the S-SAP (SAPI = "0"). This primitive shall specify the class of link required and may optionally include a SDU containing the first message.

Each DL_ESTABLISH-req primitive shall be interpreted as a request for a new independent link.

If link establishment is successful the DLC replies with a DL_ESTABLISH-cfm primitive. The LCE shall now mark the link as "LINK-ESTABLISHED" and shall send any queued messages using DL_DATA-req primitives via the S-SAP (SAPI = "0").

If the F-LCE receives a DL_ESTABLISH-ind without an SDU, it should start timer <LCE.05>. This timer is stopped when a new higher entity message or DL_DATA-ind with an SDU is received. On expiry of timer <LCE.05>, when no higher entities are running, the LCE shall release the link immediately using the "abnormal" release procedure as specified in clause 14.2.7.1.

14.2.3 Indirect (paged) FT initiated link establishment

Indirect FT initiated link establishment is the normal method of FT initiated link establishment. It occurs when a new link request is received by the LCE, and no suitable link is available. As part of this request, the first message for a given PT should be passed to the LCE in the FT. The LCE shall queue (store) this initial message, and shall issue a {LCE-REQUEST-PAGE} message using either a DL_BROADCAST-req primitive or a DL_EXPEDITED-req primitive via the B-SAP. It shall then mark the link as in the "ESTABLISH PENDING" state, and shall start timer <LCE.03>.

No further indirect link establishment messages shall be generated for a PT that has a link in the "ESTABLISH PENDING" state. New requests shall be queued until the pending link establishment is either successful or has failed (timer <LCE.03> has expired).

The DL_EXPEDITED-req primitive shall only be used if the wanted PT is recorded as having a "FAST-PAGE" capability in the LCE location table. Otherwise the DL_BROADCAST-req primitive shall be used.

For individual messages, the identity used in this message shall be decided as follows:

- a) the assigned individual TPUI shall be used if available. This may be transmitted in either the short address format or the long address format;
- b) if an assigned individual TPUI is not available the identity shall depend on the address format used; either
 - the short address format shall be used. This shall contain the default individual TPUI; or
 - the long address format shall be used. This shall contain part of the IPUI.

For group messages, an assigned value of TPUI shall always be used.

Refer to EN 300 175-6 [5] for details of IPUI and TPUI. Refer to clause 8.2 of the present document, for details of the corresponding message formats.

NOTE 1: The use of a default individual TPUI or an IPUI means that the identity is not guaranteed to be unique. This allows the possibility of causing false responses from PTs. Therefore the use of assigned individual TPUIs is recommended.

If the {LCE-REQUEST-PAGE} message is successfully received by the intended PT, it shall respond with a PT initiated link establishment, using the procedure defined in clause 14.2.2. The DL_ESTABLISH-req primitive used by the PT shall contain a {LCE-PAGE-RESPONSE} message which shall contain a complete portable identity. The identity used shall be decided as follows:

- the complete IPUI shall be used by default.
- the assigned individual TPUI may be used if the FT has indicated that this is allowed. This indication is provided by the <<USE-TPUI>> information element in the {LOCATE-ACCEPT} message.

NOTE 2: If an FT permits a PT to respond with TPUI, it has no mechanism to deal with multiple responses. There is an implicit requirement on the FT to ensure that TPUI assignments are unique.

When the {LCE-REQUEST-PAGE} message contains the default individual TPUI, and the intended PT has an assigned TPUI available, the PT shall still respond with a PT initiated link establishment.

The PT response shall be regarded as a new transaction, and the LCE in the PT shall set the transaction identifier to indicate a PT initiated transaction. See clause 7.3.

The {LCE-REQUEST-PAGE} message may contain extended details of the required MAC layer service (see clause 8.2). In this event the responding PT may use these service details to start immediate establishment of the required service at the MAC layer. In all other cases, the responding PT shall only establish the minimum MAC layer service needed for a single C-plane link (i.e. a single duplex bearer).

The PT may respond to {LCE-REQUEST-PAGE} messages that contain a correct identity, even if the DLC reports an error for the message, but in this event only a single C-plane link shall be established.

NOTE 3: The possibility to reply to an errored message is allowed to improve the probability of getting the wanted response (i.e. by allowing an error) even though it also means that some false responses may exist. False responses are already possible because the use of shortened IPUIs is allowed.

If this indirect link establishment is successful the DLC at the FT shall deliver a DL_ESTABLISH-ind primitive to the originating LCE containing the {LCE-PAGE-RESPONSE} message. The LCE shall then check the identity contained in this response against a list of outstanding {LCE-REQUEST-PAGE} messages, and if the identity matches it shall mark the link as "LINK ESTABLISHED"; it shall stop timer <LCE.03> and shall send all the queued messages using DL_DATA-req primitives via the S-SAP (SAPI = "0").

NOTE 4: The MAC layer identity, PMID, is directly related to the assigned individual TPUI (if used). This identity should be available via the LLME, and may be used to identify the matching {LCE-REQUEST-PAGE} message.

NOTE 5: The LCE should only provide a consistency check of the portable identity. Further checks of identities (for validation or authentication) may occur in the higher entities.

If the identity does not match, the LCE shall immediately reject the setup by sending a {LCE-PAGE-REJECT} message, using a DL_DATA-req primitive via the S-SAP (SAPI = "0") using the same DLEI as indicated by the primitive containing the {LCE-PAGE-RESPONSE}. This FT reply shall also use the same transaction value as used by the PT in the {LCE-PAGE-RESPONSE} message.

The LCE may use the {LCE-PAGE-REJECT} to report a invalid assigned TPUI (individual or group TPUI), by using the <<REJECT-REASON>> information element to indicate "invalid TPUI". Upon receipt of this reason the PT should immediately erase the assigned TPUI.

The LCE may use the {LCE-PAGE-REJECT} to request an automatic test call back, by setting the <<REJECT-REASON>> to test call back: normal/emergency, en-bloc or test call back: normal/emergency, piecewise. See clause 15.8.

This unwanted link shall be immediately released using the "normal" release procedures defined in clause 14.2.7.

NOTE 6: The {LCE-PAGE-REJECT} message is only sent over the point-to-point link that has been established by the responding PT. It is not a broadcast message.

NOTE 7: The {LCE-REQUEST-PAGE} message may address more than one portable, when using a group identity. In this case the {LCE-PAGE-REJECT} message should be used to reject a second (and any subsequent) responses.

If timer <LCE.03> expires before the wanted link is established, the LCE should resubmit the {LCE-REQUEST-PAGE} message. Resubmitted messages shall only be issued at a lower priority than other outstanding B-FORMAT messages. A message may be resubmitted a maximum of N300 times, before it is discarded. The link shall remain in the "ESTABLISH PENDING" state until the {LCE-REQUEST-PAGE} message is discarded, thereby preventing any other setup attempts to the same PT. Upon discarding the message, the link shall be immediately marked as "LINK RELEASED" and the LLME shall be notified of the failure. A new indirect establishment may be initiated immediately.

NOTE 8: The failure of one or more indirect establishment attempts may be used to update the LCE location table such that future setup requests are rejected. Any such action is not specified as part of the present document.

If the call is released by the higher entity (usually as a result of a time-out) the message shall be immediately discarded, such that any subsequent responses shall be appear as unwanted responses, thereby invoking the reject procedures described above.

14.2.4 Direct FT initiated link establishment

Direct FT initiated link establishment can be used as an alternative to indirect FT initiated link establishment only when the intended PT has a valid entry in a LCE location table. This table entry shall specify one RFP as the likely location of the wanted PT.

NOTE: The definition of "valid entry" is a local matter and is not specified in the present document.

When the first message for a particular PT is passed to the LCE in the FT, the LCE queues (stores) the call setup message, and issues a DL_ESTABLISH-req primitive directly to the DLC layer via the S-SAP (SAPI = "0"). This primitive shall contain the correct routing information (to identify a single RFP), and this is used by the DLC layer to address the RFP to use for the setup attempt.

If link establishment is successful the DLC replies with a DL_ESTABLISH-cfm primitive. The LCE shall now mark the link as "LINK ESTABLISHED", and it shall send the original call setup message using a DL_DATA-req primitive via the S-SAP (SAPI = "0").

If this direct link establishment fails, the originating LCE may reattempt using the indirect procedures described in clause 14.2.3.

14.2.5 Link maintenance

Active link maintenance is the responsibility of the DLC layer, and no additional maintenance procedures are defined for the LCE.

The LCE has a passive responsibility to report any link failures. An unexpected link failure may occur at any time, resulting in an unexpected DL_RELEASE-ind primitive. The LCE shall report this failure immediately to all active entities. Link re-establishment shall only be attempted upon receipt of service demands from a higher entity.

NOTE: The mechanism for such reporting is internal to the DLC layer, and is not specified in the present document.

14.2.6 Link suspend and resume

A link may be suspended in response to a request from the CC or COMS entity. This request shall only activate the DLC layer suspend procedure if no other higher entities are using the link (this includes other CC or COMS entities).

A link should be resumed in response to a request from any higher entity. The arrival of a message from any higher entity shall be regarded as a request for link resumption.

Support of the suspend and resume procedures by the LCE is only required when using Class B links.

NOTE: A Class A link cannot be suspended. The LLME may command the release of the Class A link when suspending a call, this provides an equivalent function to Class B suspend.

14.2.6.1 Link suspend

The suspend procedure may be initiated by the LCE at either side (FT or PT) by issuing a DL_SUSPEND-req primitive to the DLC layer. The LCE shall then mark the link as "SUSPEND PENDING" and shall start timer <LCE.04>. Any subsequent messages for this link shall be queued until a response is received from the DLC.

At the receiving side, a request for suspension is indicated with a DL_SUSPEND-ind primitive. The receiving LCE may either accept or reject the suspension, and shall immediately indicate its' decision using a DL_SUSPEND-res primitive. If the suspension is accepted, the receiving LCE shall immediately mark the link as "LINK SUSPENDED". No further messages shall then be submitted, without first invoking link resumption. If the suspension is rejected the receiving LCE shall take no further action and may immediately continue with normal message transmission.

Acceptance or rejection of the suspension shall be indicated to the initiating LCE using a DL_SUSPEND-cfm primitive. Upon receipt of DL_SUSPEND-cfm primitive indicating acceptance, the initiating LCE shall stop timer <LCE.04> and shall mark the link as "LINK SUSPENDED".

NOTE: If there are any queued messages the link should be immediately resumed.

Upon receipt of a DL_SUSPEND-cfm primitive indicating rejection, the initiating LCE shall stop timer <LCE.04> and shall mark the link as "LINK ESTABLISHED". If there are any queued messages these shall be immediately transmitted using DL_DATA-req primitives.

14.2.6.2 Link resume

The resume procedure can be initiated by the LCE at either side (FT or PT) by issuing a DL_RESUME-req primitive to the DLC layer. The LCE shall then mark the link as "RESUME PENDING" and shall start timer <LCE.04>. All messages for this link shall be queued until a response is received from the DLC.

At the receiving side, a request for resumption is indicated with a DL_RESUME-ind primitive. The receiving LCE shall either accept the resumption or shall reject the resumption by immediately releasing the link using the "abnormal" release procedures described in clause 14.2.7.

If the resumption is accepted, the receiving LCE shall immediately return a DL_RESUME-res primitive and shall mark the link as "LINK ESTABLISHED". Successful resumption shall be reported to the initiating LCE with a DL_RESUME-cfm primitive, and on receipt of this primitive, the initiating LCE shall stop timer <LCE.04> and shall mark the link as "LINK ESTABLISHED". Any queued messages shall be immediately transmitted using DL_DATA-req primitives.

Rejection is indicated to both the receiving LCE and the initiating LCE with DL_RELEASE primitives as described in clause 14.2.7. In this event, the initiating LCE shall stop timer <LCE.04> and both entities shall mark the link as "LINK RELEASED".

NOTE: Either LCE may subsequently attempt to re-establish the link using the procedures defined in clause 14.2.1.

14.2.7 Link release

If a higher layer entity no longer requires the link, it shall indicate this to the LCE by means of notification "NLR" (No Link Required). This notification shall contain a release reason, indicating whether or not the entity requires the link to be still maintained for some time. If the link needs to be maintained for some time, the release reason shall be "partial release".

14.2.7.1 NLR notification without "partial release" as release reason

If the higher layer entity issues an NLR notification without "partial release" as release reason, then the LCE shall examine whether no other higher layer entities are using it and no LCE timers are running. If this is the case, then the LCE shall release the link using either the "normal" release procedure or the "abnormal" release procedure.

NOTE: The "normal" release is a conditional release that allows the DLC to complete transmission of any outstanding messages before releasing the link. The "abnormal" release is a request for an unconditional (immediate) release where any outstanding messages are discarded without notification. Use of the "normal" release procedure is recommended.

"Normal" release shall be initiated by the LCE at either side (FT or PT) by issuing a DL_RELEASE-req primitive to the DLC layer with the release mode parameter indicating "normal". The LCE shall then mark the link as "RELEASE PENDING", and shall start timer <LCE.01>. The DLC layer shall reply with a DL_RELEASE-cfm primitive to indicate completion of the release, and the LCE shall then mark the link as "LINK RELEASED", and shall stop timer <LCE.01>.

The DL_RELEASE-cfm primitive shall indicate the release mode achieved. A "normal" release shall indicate that the release has been successfully completed (e.g. successful acknowledgement of a Class B link released). An "abnormal" release shall indicate either an unacknowledged Class B release, or an unexpected upward release.

If timer <LCE.01> expires before the DL_RELEASE-cfm primitive is received, the initiating entity shall immediately initiate the "abnormal" release procedure as described below.

"Abnormal" release shall be initiated by the LCE at either side (FT or PT) by issuing a DL_RELEASE-req primitive to the DLC layer with the release mode parameter indicating "abnormal". The LCE shall then mark the link as "RELEASE PENDING". The DLC layer shall reply with a DL_RELEASE-cfm primitive to indicate completion of the release, and the LCE shall then mark the link as "LINK RELEASED".

A link shall not be re-established whilst in the "RELEASE PENDING" state.

14.2.7.2 NLR notification with "partial release" as release reason

If the higher layer entity issues an NLR notification with "partial release" as release reason, then the LCE shall start (or re-start if already running) timer <LCE.02>. On expiry of <LCE.02>, and if no other higher entities are using the link, and no other LCE timers are running, the LCE shall release the link immediately using the "abnormal" release procedure as specified in clause 14.2.7.1. No action shall be taken on expiry of <LCE.02> if any other higher entities are using the link, or if any other LCE timers are running.

If CC wants to clear a call using "partial release", it shall first execute a normal call release procedure as specified in clause 9.5.1, using "partial release" in the <<RELEASE-REASON>> information element in the {CC-RELEASE} message. Thereafter it shall issue an NLR notification with "partial release" as reason parameter.

CISS and CLMS shall always indicate "partial release" in their NLR notifications. The use of partial release is not required for CLSS. MM should normally indicate "partial release" in the NLR notification, except when partial release is undesirable e.g. after a location registration procedure with TPUI assignment has been made.

14.3 Connectionless link control procedures

14.3.1 Message routing

A single connectionless link may exist in the direction FT=>PT or PT=>FT. This link shall only be used by the CLMS entity.

No establishment or maintenance procedures shall be defined for this link, and the state of suitable lower resources shall be ignored by the LCE. CLMS messages shall be immediately submitted to the DLC unless the broadcast announcement procedure described in clause 14.3.2 is used.

NOTE 1: The LLME is assumed to be responsible for establishing connectionless resources in all lower layers whenever required.

CLMS messages should be sent on the connectionless link using a DL_UNIT_DATA-req primitive via the connectionless S-SAP (SAPI = "3"). However, if a suitable connection oriented link already exists in the "LINK ESTABLISHED" state, a CLMS message may be submitted over that link using a DL_UNIT_DATA-req primitive via the connection oriented S-SAP (SAPI = "0").

CLMS-FIXED messages shall be sent to the B-SAP using the DL_BROADCAST-req or DL_EXPEDITED-req primitive."

A connection oriented link shall not be established to only carry CLMS messages.

CLMS messages may be received via either the connectionless or the connection oriented SAP (SAPI = "0" or "3"). Messages shall be passed to the CLMS in their order of arrival.

NOTE 2: There are restrictions on the maximum message lengths for all CLMS messages (refer to clause 12.3.2.1). These restrictions apply directly to the CLMS operation, and no checking of message lengths is required in the LCE.

14.3.2 Broadcast announce procedure

CLMS messages in the direction FT to PT may optionally be queued in the LCE while an automatic announcement is broadcast.

This procedure shall not be used if the CLMS message is being routed over a connection oriented link (SAPI = "0").

Upon receipt of a message requiring an announcement, the LCE may queue the message. It shall then immediately issue a {LCE-REQUEST-PAGE} message indicating "none" (refer to message coding in clause 8.2.1) using a DL_BROADCAST-req or DL_EXPEDITED-req primitive via the B-SAP.

NOTE: The primitive is chosen according to the setup attributes of the relevant portable. See also clause 14.2.3.

The {LCE-REQUEST-PAGE} message shall contain the same value of connectionless TPUI as used in the CLMS message.

The LCE shall then start timer <LCE.03>, and upon expiry of this timer it shall submit the CLMS message using a DL_UNIT_DATA-req primitive via the S-SAP (SAPI = "3"), or, a DL_BROADCAST-req or DL_EXPEDITED-req primitive via the B-SAP depending on the type of CLMS message used.

14.4 Procedure for collective and group ringing

On receipt of a request from the local network for an incoming call an FP-IWU may decide to ring part or all of its PPs prior to forwarding the call.

In this case the FP-IWU shall request the LCE to send a request for ringing indicating which PPs shall ring. Either the group mask shall be used to ring all PPs having an assigned connectionless group TPUI matching the group mask, or the connectionless TPUI shall be used to ring the PPs having this connectionless TPUI assigned, or the Collective Broadcast Identifier shall be used to ring all PPs.

Upon this request the FT LCE shall send a special {LCE-REQUEST-PAGE} message see clause 8.2.1, thereby requesting all or part of the subscribed PPs as indicated to start ringing.

At the PT side on receipt of the {LCE-REQUEST-PAGE} message indicating "ringing" the LCE shall inform the P-IWU of the request.

Depending on the type of ringing requested the PP shall react as following:

If group mask ringing was requested the PP shall compare the received group mask to its assigned connectionless group TPUI (if any). The PP shall start ringing if the assigned connectionless group TPUI has in the last 12 bits "1 s" at the same bits where the mask has "1s" and shall not care for the settings of the bits in which the mask has "0s". The PP shall not ring if it has "0" in any bit position in which the relative bit in the mask has "1".

EXAMPLE 1: PP's group TPUI 12 last bits = "1100 0111 1111"
 Group mask received = "1100 0011 1111"
 Comparison decision: "MAP", PP shall ring.
 (The mask requires "1" in bits 1, 2, 3, 4, 5, 6, 11 and 12, the group TPUI has them set; bits 7 to 10 "do not care" bits.)

EXAMPLE 2: PP's group TPUI 12 last bits = "1100 0111 1111"
 Group mask received = "1111 0011 1111"
 Comparison decision: "NOT MAP", PP shall not ring.
 (The mask requires "1" in bits 1, 2, 3, 4, 5, 6, 9, 10, 11 and 12, the group TPUI has bits 9 and 10 set to "0"; bits 7 and 8 "do not care" bits.)

NOTE 1: The P-IWU reaction in the event of another call being in progress when collective or group ringing occurs up to the IWU. For example if at the time some PPs have already established a call (e.g. two PPs having internal call) the {LCE-REQUEST-PAGE} may be interpreted as an unexpected message from those PPs and ringing need not be initiated.

Similarly, the P-IWU reaction upon in the event of a call setup during collective or group ringing is also up to the IWU. For example it may reject the call-setup or it may stop ringing and allows the call setup to proceed.

NOTE 2: By choosing a specific Group mask and group TPUIs allocation an FP may ring one or several PP groups at a time.

If group ringing was requested the PP shall ring if the received connectionless group TPUI is equal to the last 12 bits of its assigned connectionless group TPUI (if any).

If Collective ringing was requested (see clause 8.2.1) the PP shall check first whether the Address field equals FFFH (CBI), and if it is true the PP shall start ringing.

When a user answers the ringing, the "off hook" shall trigger an outgoing call request. The {CC-SETUP} message shall be submitted to the P-LCE, triggering by this a direct PT link establishment, see clause 14.2.2. When the link is established the {CC-SETUP} message shall be passed to the F-LCE.

On receipt of the {CC-SETUP} message at the FT side an MNCC_SETUP-ind primitive shall be sent to the F-IWU.

At the FP-IWU this outgoing call is directly mapped to the awaiting incoming call and an MNCC_CONNECT-req primitive shall be issued to the FT which shall send a {CC-CONNECT} message to the PT.

In this case or if FP decides to release the incoming call, the F-IWU shall inform the LCE that ringing is not any longer required and the LCE shall immediately send a new {LCE-REQUEST-PAGE} message indicating "incoming call released from the FP" or "incoming call has been answered" as appropriate, thereby requesting ringing to be stopped.

Upon receipt of this message the not answering PPs shall stop ringing.

NOTE 3: To avoid infinite ringing (e.g. PP goes out of range and is not reachable for the "ring off" message) a timer should be implemented in the P-IWU. The recommended value is 120 seconds.

14.5 Resume paging

This procedure is closely related to MAC resume procedure as defined in EN 300 175-3 [3].

If MAC layer paging fails (e.g. PP has moved to another cluster) the FT LLME shall request the FT-NWK LCE for initiating a LCE resumption providing the ECN of the related link.

As result the LCE shall construct a Long Page message as defined in clause 8.2.2 using the LCE header code "escape" and the discriminator code "Resume paging". The connection identity for the connection to be resumed shall be provided.

The LCE shall issue the {LCE-REQUEST-PAGE} message using either a DL_BROADCAST-req primitive or a DL_EXPEDITED-req primitive via the B-SAP. It shall then mark the link as in the "RESUMPTION PENDING" state, and shall start timer <LCE.03>.

If timer <LCE.03> expires before the wanted link is established, the LCE should resubmit the {LCE-REQUEST-PAGE} message. Resubmitted messages shall only be issued at a lower priority than other outstanding B-FORMAT messages. A message may be resubmitted a maximum of N300 times, before it is discarded. (N300 is an application specific value. Recommended value for voice applications is 3.)

If the {LCE-REQUEST-PAGE} message is successfully received by the intended PT, it shall check whether there is a link in ACTIVE state which can be identified by the received in the paging message Connection identity. If such link exists the PT shall construct a LCE-PAGE-RESPONSE message following the rules as described in clause 14.2.3 and shall send it in a DL-DATA-req primitive over the existing link.

NOTE: The arrival of this message at PT MAC layer will consequently trigger a PT initiated connection resumption at MAC.

On receipt of the LCE-PAGE-RESPONSE (over the resumed connection) the FT-LCE shall check the identity contained in this response against a list of outstanding {LCE-REQUEST-PAGE} messages, and if the identity matches the identity associated with this link FT-LCE shall mark the link as "LINK ESTABLISHED"; it shall stop timer <LCE.03> and shall continue with normal operation (i.e. with the action that was the reason for the required resumption).

15 Management procedures

15.1 Lower Layer Management Entity (LLME)

The Lower Layer Management Entity (LLME) shall contain the following groups of procedures that are relevant to the operation of the NWK layer:

Service mapping and negotiation: mapping of the user service demands into information elements and procedures of the internal protocols. Exchange of information elements during call setup to negotiate and agree the exact service details.

Service modification: management of service modifications (including suspension and resumption) in response to changing service demands.

Resource management: coordination of the installation and control of the lower layer resources in response to service demands.

Management of MM procedures: coordination of different Mobility Management (MM) procedures to avoid deadlock conditions.

Call ciphering management: coordination of ciphering functions between the Mobility Management (MM) entity and one or more Call Control (CC) entities.

External handover management: procedures to support the transfer of parameters related to external handover.

Test management: procedures to support testing of equipment.

Application assistance: managing mapping, exchange and allocation of application related parameters.

15.2 Service mapping and negotiation

15.2.1 General

The LLME is required to map the external service demands (as indicated by the MNCC_SETUP primitive) into internal service instances. Negotiation of acceptable services may be performed at the same time using the following procedures the Call Control (CC) establishment phase.

The LLME shall map the interworking (user) service details into internal service demands and both the external attributes and the resulting internal attributes may be negotiated. If the negotiation is successful, only the agreed service details shall be passed to the lower layers (via the LLME) to invoke U-plane service installation.

Service negotiation may involve one or more of the following procedures:

- a) the prioritized list procedure to negotiate the <<CALL-ATTRIBUTES>> and/or <<CONNECTION ATTRIBUTES>> and/or <<IWU-ATTRIBUTES>> elements;
- b) the exchanged attribute procedure to negotiate the <<IWU-ATTRIBUTES>> element;
- c) the operating parameter procedure to negotiate the <<WINDOW-SIZE>> and/or the <<TRANSIT-DELAY>> elements;
- d) the peer determined negotiation procedure to negotiate the <<CALL-ATTRIBUTES>> and/or <<CONNECTION ATTRIBUTES>> and/or <<IWU-ATTRIBUTES>> elements.

15.2.2 Prioritized list negotiation

Prioritized list negotiation allows up to three choices of service mapping to be offered by the initiating entity by including repeated <<CALL-ATTRIBUTES>> and/or <<CONNECTION ATTRIBUTES>> and/or <<IWU-ATTRIBUTES>> information elements into the {CC-SETUP} message as follows:

- a <<REPEAT-INDICATOR>> element indicating "prioritized list" followed by;
- a prioritized list of up to 3 <<CALL-ATTRIBUTES>> and/or <<CONNECTION ATTRIBUTES>> and/or <<IWU-ATTRIBUTES>> elements.

Upon receipt of this message, the peer entity should choose the highest priority option that it can support, and shall confirm that choice returning the appropriate <<CALL-ATTRIBUTES>> and/or <<CONNECTION ATTRIBUTES>> and/or <<IWU-ATTRIBUTES>> elements in the first response message (i.e. {CC-SETUP-ACK}, {CC-CALL-PROC}, {CC-ALERTING} or {CC-CONNECT}). If none of the offered mappings are acceptable, the call shall be released using the normal release procedures.

15.2.3 Exchanged attribute negotiation

Exchanged attribute negotiation may be supported by interworking units in addition to or instead of prioritized list negotiation. Exchanged attribute negotiation provides a mechanism for peer (receiving) entities to suggest alternative service attributes in response to an unacceptable setup request. This response is designed to provide additional information to the initiating entity such that a subsequent reattempt (using modified service attributes) is more likely to succeed.

Exchanged attribute negotiation shall only be invoked by the receiving IWU if support of this capability is indicated in the <<IWU-ATTRIBUTES>> element (as contained in the {CC-SETUP} message), and if none of the proposed services in the {CC-SETUP} message are acceptable. In this event, the IWU shall reject the call by issuing a MNCC_REJECT-req primitive. It may include one alternative service description in this rejection using an <<IWU-ATTRIBUTES>> element indicating "exchanged parameter negotiation". This description shall indicate an alternative service from the services that are supported by that IWU. An MNCC_REJECT-req primitive which includes the <<IWU-ATTRIBUTES>> element (thus indicating it wishes to initiate the exchanged attribute negotiation procedure) and <<CONNECTION ATTRIBUTES>> shall always indicate a <<RELEASE-REASON>> of "Partial release", thereby indicating that the lower layer (LCE) resources should be maintained (see clause 14.2.7).

In the event that no alternative mapping is possible, the <<IWU-ATTRIBUTES>> element may either be omitted or, if included, it shall contain a copy of the received <<IWU-ATTRIBUTES>> element that has been modified to indicate "negotiation not possible". If exchanged parameter negotiation is not supported, the <<IWU-ATTRIBUTES>> element shall be omitted and the <<RELEASE-REASON>> element shall be included indicating "negotiation not supported".

Upon receipt of a response indicating "exchanged parameter negotiation" the initiating entity shall issue the proposed alternative service mapping to the initiating IWU in a MNCC_REJECT-ind primitive (cause = peer message). The call shall nonetheless be released, and any subsequent reattempt shall be treated as a new call instance.

15.2.4 Operating parameter negotiation

Operating parameter negotiation may be supported as part of all data services. The procedure shall involve the following information elements:

- <<WINDOW-SIZE>>;
- <<TRANSIT-DELAY>>.

If the initiating side includes one (or more) of these parameters in the {CC-SETUP} message, the peer side shall check that the offered parameters are acceptable before accepting the call. The peer side may negotiate a reduced value for one or more of the parameters by returning the modified elements in the first response message (i.e. {CC-SETUP-ACK}, {CC-CALL-PROC}, {CC-ALERTING} or {CC-CONNECT}). This message may also return unmodified parameters as formal acceptance of these unmodified values.

In all cases, the peer side shall only return a value less than or equal to the initial offer, and the initiating side should normally accept any reduced value. In exceptional circumstances, where the reduced value gives an unacceptable grade of service, the initiating side may release the call.

15.2.5 Peer attribute negotiation

Peer determined attribute negotiation may be supported by interworking units in addition to or instead of prioritized list negotiation and/or exchanged attribute negotiation. It provides a mechanism whereby the call initiating entity allows the peer (receiving) entity to redefine some of the <<IWU-ATTRIBUTES>> parameters given in the {CC-SETUP} message without requiring the release and re-establishment of the initiated call. This procedure represents a combination of the Prioritized list negotiation and the Exchanged attributes procedures.

Peer determined attribute negotiation shall only be invoked by the receiving IWU if support of this capability is indicated in the <<IWU-ATTRIBUTES>> element (as contained in the {CC-SETUP} message), and if none of the proposed services in the {CC-SETUP} message are acceptable. In this event, the IWU/PP application may choose to continue the call setup procedure by including one alternative service description in the <<IWU-ATTRIBUTES>> element in the first response message (i.e. {CC-SETUP-ACK}, {CC-CALL-PROC}, {CC-ALERTING} or {CC-CONNECT}). The peer entity shall in offering the alternative <<IWU-ATTRIBUTES>> element not change the codings of octets 3 and 4 of that element from those which it received in the <<IWU-ATTRIBUTES>> in the {CC-SETUP} message. If the peer entity cannot support the attributes specified in these octets or in any other part of the {CC-SETUP} message excluding the <<IWU-ATTRIBUTES>>, or if it does not support these procedures the call shall be released using the normal release procedures.

The initiating entity shall indicate its acceptance of these new attributes by proceeding with the normal call setup procedures. If it cannot support the new attributes the call shall be released using the normal release procedures.

15.3 Service modification procedures

Service modification procedures provide for a restricted set of modifications to an existing "ACTIVE" call, as described in clause 9.6.

The LLME is required to map the new service demands (as indicated by the MNCC-MODIFY primitive) into internal service change procedures, and the resulting mapping shall be exchanged using the {CC-SERVICE-CHANGE} message.

Following acceptance of the change, the LLME shall map the U-plane modifications into lower layer service modifications and the agreed service details shall be passed to the lower layers (via the LLME) to invoke U-plane service modification.

The LLME may also invoke C-plane suspension via the LCE.

15.4 Resource management

All the DECT network resources shall be managed and coordinated within the LLME. This clause shall only describe coordination of the resources associated with a single portable part. Any broader coordination (such as may be required in complex fixed parts) is not described.

C-plane resources are managed via the LCE, U-plane resources are managed directly via the LLME. In both cases, the detailed management procedures are not specified as part of the present document, because of the need to allow considerable implementation flexibility.

15.5 Management of MM procedures

In order to avoid possible deadlocks between different Mobility Management (MM) procedures the following rules apply:

- two MM procedures are allowed at any one time, but they shall not both have been initiated by the same side;
- if a MM procedure has not yet been finished, then a second MM procedure may only be initiated if the second MM procedure has a higher priority than the first MM procedure.
- the only exception to these two rules is the External protocol information procedure which can be initiated by any side at any time.

If a second procedure with higher priority is invoked by the side which has not invoked the first unfinished procedure, then the other side shall accept this second higher priority procedure and respond, without waiting for a completion of the lower priority procedure. In this case, completion of the higher priority procedure restarts the timer of the lower priority procedure. If the higher priority procedure is a FT initiated user authentication procedure, then the PT shall stop the timer of an unfinished PT initiated lower priority procedure and start the <MM_auth.2> timer. The PT shall stop the <MM_auth.2> timer when it responds to the user authentication procedure by sending an {AUTHENTICATION-REPLY} or {AUTHENTICATION-REJECT} message. If the <MM_auth.2> timer expires or is stopped and the lower priority procedure has not been finished in the meantime, then the timer of the interrupted lower priority procedure shall be restarted.

The event of sending/reception of a {MM-IWU} message during an unfinished MM procedure shall restart the running MM timer.

If a procedure with higher priority is invoked by the side which has already invoked a lower priority procedure, which is not yet finished, then the lower priority procedure shall be cancelled.

Priority level 1 (highest priority):

- authentication of a FT.

Priority level 2 (medium priority):

- access rights terminate, FT initiated;
- authentication of a PT;

- authentication of the user;
- ciphering related, FT initiated;
- identification of PT;
- key allocation;
- location update;
- parameter retrieval, FT initiated;
- temporary identity assignment.

Priority level 3 (lowest priority):

- access rights;
- access rights terminate, PT initiated;
- ciphering related, PT initiated;
- detach;
- location registration;
- parameter retrieval, PT initiated.

The procedures of priority level 1 and 3 are PT initiated. The procedures of priority level 2 are FT initiated.

The External protocol information procedure is not put on the priority level list. It is allowed to be initiated at any time and by any side interrupting any MM procedure. However, the procedure is allowed to interrupt a running MM procedure only if it carries information needed for the completion of the running MM procedure. In all other cases the procedure shall be run outside of other MM procedures.

NOTE: When used to carry segments of information the External protocol information procedure is considered as a part of the running MM procedure (see clause 13.9.3).

For the transaction identifier flags assignment in case of nested or stand alone MM procedures, see annex H.

For some procedures external to the MM entity, typically CC and COMS procedures, the FT can decide to perform MM procedures prior to executing the PT-initiated CC/COMS procedures. For instance the FT may want to authenticate the PT prior to sending an acknowledgement on a {CC-SETUP} message. These "interrupting" MM procedures might take more time than the expiry time of the running timers in the CC/COMS entity.

To prevent CC/COMS state machines from waiting on a response delayed by MM procedures, the FT has the possibility to restart the CC/COMS timers in the PT. To cause a timer restart, the LLME should request the CC (or COMS) entity at the FT side to send a {CC-NOTIFY} message containing the <<TIMER-RESTART>> information element.

15.6 Call ciphering management

Call ciphering shall be invoked using the MM procedures described in clause 13.8. Each MM procedure may be used to enable or disable ciphering of one instance of CC or COMS.

When a cipher change is requested, the LLME shall relay the relevant call references (TI plus PD) from the CC to the MM for inclusion in the <<CALL-IDENTITY>> element.

Following successful reception of a cipher request, the receiving side LLME shall immediately invoke ciphering on all relevant MAC connections, and if successful shall mark the connection as ciphered.

The initiating entity shall take no direct action, but shall monitor the ciphering of all relevant MAC connections, and if successful shall mark the connection as ciphered.

Once ciphered, the connection shall only be handed over to a second ciphered connection.

15.7 External Handover

External handover is the process of switching a call in progress from one Fixed Part (FP-1) to another Fixed Part (FP-2). This means the handover occurs between two independent systems, where each system has its own lower layers of protocol and has an independent set of network layer Service Access Points (SAPs). To make external handover possible, a common management entity above the two fixed parts is necessary.

This clause describes DECT procedures which can be used as part of the CC entity to support external handover. It does not specify how the fixed network performs the handover switching and it does not define the criteria that should be used to decide when to make a handover.

Handover candidate information is required to identify FPs to which external handover may be attempted. The procedures for obtaining handover candidates are defined in clause 15.7.1. A handover reference (network parameter) is, in general, required to enable the network to re-connect the new DECT connection to the existing call. Procedures for obtaining the handover reference are specified in clause 15.7.2.

External handover is PP initiated. However, the FP can maintain control by means of the handover candidate and handover reference procedures. The FP may also suggest that a PP initiates an external handover (see clause 15.7.3).

NOTE: In some configurations, the handover candidate procedures may be combined with the handover reference procedures. However, the combination of these procedures is not suitable for network configurations in which the handover reference depends on the target FP selected by the PP.

The procedures for setup of a DECT connection to a new FP, and release of the old connection are defined in clause 15.7.4.

Procedures for ciphering during an external handover are described in clause 15.7.6.

15.7.1 Handover candidate procedures

15.7.1.1 General

Before external handover can occur, the PP has to obtain handover candidates information from the FP. This enables a PP to determine to which FPs it may make an external handover. The FP may provide synchronization information, which may enable the PP to establish the new bearer, and re-initiate ciphering more rapidly.

The external handover candidate information may be obtained using either or both of the sub procedures: handover candidate indication (see clause 15.7.1.2), and, handover candidate retrieval (see clause 15.7.1.3).

Handover candidate information provided in a CC message should be regarded as call specific. Handover candidate information provided in {MM-LOCATE-ACCEPT} or {MM-INFO-SUGGEST} or {MM-INFO-ACCEPT} is valid until a change of FP.

Following a successful external handover to a new FP, any external handover candidate information stored in the PP should be considered invalid, and new handover candidate information should be obtained before attempting any further external handovers.

The FP should ensure that the indicated candidate FPs support external handover from the current FP. If the current FP supports encryption, then the FP should ensure that the indicated candidate FPs support encryption.

15.7.1.2 Handover candidate indication

The FP shall provide the PP with an <<ext h/o indicator>> in {CC-SETUP}, {CC-SETUP-ACK}, {CC-CONNECT}, {CC-INFO}, {LOCATE-ACCEPT} or {MM-INFO-SUGGEST}. Besides candidate FPs, the <<ext h/o indicator>> indicates if the identities of other FPs are available using the handover candidate retrieval procedure.

NOTE: The use of the {CC-INFO} message is preferred if inclusion of handover candidates in {CC-SETUP} would result in segmentation of the message.

15.7.1.3 Handover candidate retrieval

The PP shall not invoke this procedure if the external handover bit in the broadcast attributes, is set to 0. If the PP has received an <<ext h/o indicator>> with an OID field set to zero, the PP shall not initiate this procedure.

The PP sends an {MM-INFO-REQUEST} message with an <<info type>> information element indicating "external handover parameters". The information element may more explicitly request "multiframe synchronized external handover candidate", "multiframe, PSCN and multiframe number synchronized external handover candidate", "multiframe and PSCN synchronized external handover candidate" or "non-synchronized external handover candidate". If the PP has identified a possible candidate FP for external handover, this should be indicated in a <<fixed identity>> information element.

NOTE: The info types "multiframe synchronized external handover candidate", "multiframe, PSCN and multiframe number synchronized external handover candidate" and "multiframe and PSCN synchronized external handover candidate" are not mutually exclusive. For example, the FP response to a request for "multiframe synchronized external handover candidate" should include FPs from all of the above categories.

Upon receipt of an MM-INFO-REQUEST including a request for external handover parameters, the FP shall respond either with MM-INFO-ACCEPT or MM-INFO-REJECT, as described in the following.

The FP should respond with an {MM-INFO-ACCEPT} containing <<info type>> and one or more <<fixed identity>> information elements containing ARIs or PARKs to identify the FPs to which external handover may be attempted. The FP may also include a handover reference in a <<network parameter>> information element.

If a PARK is included, it identifies (in conjunction with the park length indicator) a range of PARIs (not SARIs or TARIs) which may be targeted for external handover. The PARK{y} included shall only be used for external handover candidate selection; it does not affect location registration. If an ARI is included, it indicates the PARIs (not SARIs or TARIs) of FPs which may be targeted for external handover.

Following a successful external handover to a new FP, any external handover candidate information stored in the PP should be considered invalid, and new handover candidates should be obtained before attempting any further external handovers.

The FP should ensure that the identified candidate FPs support external handover from the current FP. If the current FP supports encryption, then the FP should ensure that the identified candidate FPs support encryption.

The FP may respond with {MM-INFO-REJECT} if it is unable to provide any of the requested information.

15.7.1.4 Target FP selection

A PP shall not attempt external handover unless FP-1 (the current FP) has indicated that the external handover to FP-2 (the candidate FP) will be supported.

NOTE: The external handover bit indicates that external handover is possible to some FPs, but does not specify to which FPs external handover is possible. An indication of external handover supported in the broadcast attributes of a candidate FP does not guarantee that external handover is possible from the current FP.

The PP may determine which FPs it may attempt external handover to by comparing the PARI of the FP in use with the PARIs of other FPs and determining if they match in the bits indicated by the ext h/o length indicator derived from the <<ext h/o indicator>> information element.

If the PP has retrieved the identities of suitable candidate FPs, it may attempt an external handover to the indicated FPs. The retrieved identities indicate the PARIs of FPs which may be used for external handover.

15.7.2 Handover reference procedure

15.7.2.1 General

By default, a PP shall assume that a handover reference is required for external handover. An FP may indicate that a handover reference is not required using a specific coding of the <<network parameter>> information element.

The <<network parameter>> is transferred as described in clauses 15.7.2.2 and/or 15.7.2.3.

Regardless of whether the Handover reference indication or the Handover reference retrieval procedure is used, the provided handover reference value is valid until the end of the call.

By default, the handover value remains valid after the successful completion of an external handover. In case updating of the handover reference value is desired upon external handover, FP-2 should indicate a new value within a CC-INFO message following the CC-CONNECT-ACK message.

15.7.2.2 Handover reference indication

An FP connected to a network supporting external handover should send <<network parameter>> in a {CC-SETUP}, {CC-SETUP-ACK}, {CC-CONNECT} or {CC-INFO} message.

If no handover reference is required, the FP shall indicate this to the PP by sending the <<network parameter>> information element indicating "Handover reference not required".

A PP supporting the external handover procedure shall be capable of storing the data in the transmitted <<network parameter>> information element in volatile memory. The minimum PP storage requirement is 10 bytes (11 bytes if discriminator field is included). The PP may be capable of storing more than 10 bytes.

NOTE: The <<network parameter>> information element should be limited in length as much as is practicable.

15.7.2.3 Handover reference retrieval

If the PP wants to initiate an external handover, and has no handover reference, and the PP has not received <<network parameter>> indicating "handover reference not required", the PP shall retrieve a handover reference prior to initiating the external handover.

NOTE 1: This procedure applies when the PP did not receive the <<network parameter>> during call establishment or when the PP was unable to store the complete handover reference in volatile memory.

The PP shall apply the parameter retrieval procedure as described in clause 13.7 to retrieve a handover reference from FP-1. The PP shall indicate "handover reference" or "external handover parameters" in the <<info type>> information element within the {MM-INFO-REQUEST}. The PP should include the identity (if available) of its proposed external handover candidate in the {MM-INFO-REQUEST} message.

Upon reception of a MM-INFO-REQUEST including a request for external handover parameters, FP shall respond either with MM-INFO-ACCEPT or MM-INFO-REJECT, as described in the following.

The FP should respond with a {MM-INFO-ACCEPT} containing a handover reference within the <<network parameter>> information element.

NOTE 2: In some networks, it may not be possible to provide a handover reference until the FP knows the identity of the candidate FP selected by the PP.

The FP may respond with {MM-INFO-REJECT} if it is unable to provide any of the requested information.

15.7.3 External handover suggested by FP

The FP has the option to propose an external handover by using the FP initiated procedure for parameter retrieval, sending {MM-INFO-SUGGEST} containing all the information (handover reference, handover candidate) necessary to enable the PP to initiate an external handover. The PP should then initiate a handover using the procedures of clause 15.7.4.

15.7.4 NWK layer set up procedure

In the following description FP-1 is the FP in use prior to handover. FP-2 is the FP in use after handover. It is assumed that the PP already has the necessary FP identities and handover reference.

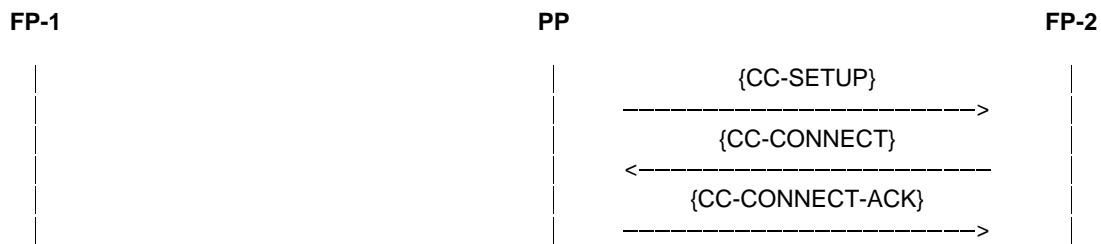


Figure 127: NWK layer set up procedure

NOTE: An entity receiving a release from its peer during external handover, should consider it to be only a release of the concerned connection (and therefore not of the associated call). Likewise, in case an entity wishes to release the entire call, it should initiate release of both network layer connections.

15.7.4.1 Handover request

The PP shall start the network layer set up procedure by sending to the FP-2 the {CC-SETUP} message indicating in the <<BASIC-SERVICE>> <Call class> field the external handover call setup (coding 1100), and including the <<NETWORK-PARAMETER>> if required.

15.7.4.2 Handover confirm

The FP-2 shall send a {CC-CONNECT} message to the PP, to show confirmation of the handover by the network. FP-2 should start timer <CC.05>.

15.7.4.3 Handover accept

The PP shall send a {CC-CONNECT-ACK} message to the FP-2, to indicate to the network that the PP accepts the handover. On receipt of {CC-CONNECT-ACK} the FP-2 stops timer <CC.05> (if used). If the timer <CC.05> expires before {CC-CONNECT-ACK} is received, the FP-2 should immediately release the new connection following the release procedures defined in clause 9.5.1.

NOTE: The receipt of {CC-CONNECT-ACK} is used to control the speech path.

15.7.4.4 Handover reject

The FP-2 may reject the handover request by responding with a {CC-RELEASE-COM} to the handover request.

NOTE: Because the connection could revert to FP-1, the PP should not erase the handover candidate/handover reference for use with FP-1 until the external handover is complete.

15.7.4.5 Release of old connection

The release procedure with the FP-1 shall be initiated as soon as the connection with the FP-2 has been established. After the FP-2 has received the {CC-CONNECT-ACK} message, the FP-1 shall initiate the release of the old connection by sending a {CC-RELEASE} message. The PP shall reply with a {CC-RELEASE-COM} message. If the PP has not received the {CC-RELEASE} message from FP-1 N400 seconds after {CC-CONNECT-ACK} message has been sent, it shall release the old link by sending a {CC-RELEASE} message. The {CC-RELEASE} message should contain a <<release reason>> indicating "external handover release". The FP-1 shall reply with a {CC-RELEASE-COM} message.

15.7.4.6 Handover Fall Back

The PP may cancel the external handover until the {CC-CONNECT-ACK} message has been sent. The PP initiates the release procedure sending a {CC-RELEASE} message to FP-2. The {CC-RELEASE} message should contain a <<release reason>> indicating "external handover release". The FP-2 shall reply with a {CC-RELEASE-COM} message. The PP shall not stop the transmission of U-plane data until the {CC-RELEASE-COM} message is received.

NOTE 1: During the handover procedure, the radio conditions may change such that the PP prefers not to proceed with the handover but remain connected to the FP-1.

NOTE 2: Because the connection could revert to FP-1, the PP should not erase the handover candidate/handover reference for use with FP-1 until the external handover is complete.

In this clause, the preferred radio connection to be used to transfer signalling information, is referred to as the primary signalling connection. During external handover, the primary signalling connection changes. Moreover, there may be another, secondary, connection that may be used to transfer signalling information.

If signalling information, e.g. keypad or display information, is transferred during external handover of the signalling connection should be as defined in table 85.

Table 85: Signalling information transferred during external handover

| Step | Event | PP-Tx | PP-Rc | FP-Rc | FP-Tx |
|------|------------------------------------|-------|-------|---------------|-------|
| 1 | PP sends {CC-SETUP} to FP-2 | FP-1 | FP-1 | FP-1 | FP-1 |
| 2 | FP-2 sends {CC-CONNECT} | FP-1 | FP-1 | FP-1 and FP-2 | - |
| 3 | PP receives {CC-CONNECT} from FP-2 | FP-1 | FP-1 | FP-1 and FP-2 | - |
| 4 | PP sends {CC-CONNECT-ACK} | FP-2 | FP-2 | FP-1 and FP-2 | - |
| 5 | FP-2 receives {CC-CONNECT-ACK} | FP-2 | FP-2 | FP-2 | FP-2 |
| 6 | PP receives {CC-RELEASE} | FP-2 | FP-2 | FP-2 | FP-2 |

During step 2 to 4, the FP should not transfer signalling information as it may result in duplicated information being received by the PP, e.g. in case the transfer delay is not the same for both connections.

NOTE 3: Alternatively, the network and PP may queue signalling information during external handover.

15.7.5 U-plane handling

External handover also involves rerouting the U-plane. The table 86 shows the recommended receive and transmit path connections for PP and FPs.

Table 86: Recommended path connections

| Step | Event | Action | PP receive path | PP transmit path | FP receive path |
|------|--------------------------------|--|-----------------|------------------|-----------------|
| 1 | PP sends {CC-SETUP} | PP starts transmission on new connection | FP-1 | FP-1 and FP-2 | FP-1 |
| 2 | FP-2 sends {CC-CONNECT} | FP-2 starts transmission | FP-1 | FP-1 and FP-2 | FP-1 or FP-2 |
| 3 | PP receives {CC-CONNECT} | | FP-1 | FP-1 and FP-2 | FP-1 or FP-2 |
| 4 | PP sends {CC-CONNECT-ACK} | PP starts receiving on new connection | FP-2 | FP-1 and FP-2 | FP-1 or FP-2 |
| 5 | FP-2 receives {CC-CONNECT-ACK} | FP-2 attaches to new connection | FP-2 | FP-1 and FP-2 | FP-2 |
| 6 | PP receives {CC-RELEASE} | PP releases old connection | FP-2 | FP-2 | FP-2 |

15.7.6 Ciphering procedure

If the connection to the FP-1 was ciphered, the connection to FP-2 shall also be ciphered.

In case the PP contains only a single cipher engine it shall delay the initiation of ciphering until the old connection is released; it shall not deactivate ciphering of the connection to FP-1 prior to initiating ciphering of the connection to FP-2.

In case the PP supports ciphering of two connections, the PP should at latest initiate ciphering upon reception of {CC-CONNECT}.

If the connection to FP-1 was ciphered, and the PP initiated ciphering fails, the PP shall re-attempt the PP-initiated ciphering procedure. This does not apply in case FP-initiated ciphering has succeeded in the mean time. The PP need not resume a PP-initiated ciphering attempt that is interrupted by a successfully completed FP initiated ciphering procedure. The PP shall release the connection if the re-attempted PP-initiated ciphering fails.

If FP-2 initiates ciphering, it shall not send {CIPHER-REQUEST} before {CC-CONNECT-ACK} has been received. If the PP receives {CIPHER-REQUEST} before the old connection is released, and is not able to simultaneously support ciphering on both connections, it may either release the old connection by sending a {CC-RELEASE-COM} message, or switch the old connection to clear mode.

If the connection to FP-1 was ciphered, and the FP-2 initiated ciphering fails, the connection shall be released by FP-2.

The PP shall not initiate deactivation of ciphering on the old connection unless upon reception of a CIPHER-REQUEST as indicated previously. This implies that, unless the PP supports ciphering on two connections, the PT shall not initiate ciphering prior to the release of the old connection.

NOTE 1: Deactivation of ciphering may result in loss of the call/connection which is likely to introduce an interruption of the speech service. For ciphering on the new connection, the same algorithm and key values which were used on the old connection from the PP to the FP-1 may be used. Alternatively a new authentication may be performed, resulting in a new cipher key.

NOTE 2: The above implies that during external handover, two cipher keys may need to be stored.

For the description of the procedure see clause 13.8.

15.7.7 Interaction with location registration

The PP which is performing an external handover should not initiate the location registration procedure until the handover is completed.

15.8 Test management procedures

The test management procedures are defined to allow for automatic testing of equipment without requiring manual intervention. These procedures shall be disabled during normal operation, but when provided they shall be active during the test standby mode.

NOTE: The procedures for entering equipment into the test standby mode are defined in EN 300 175-3 [3].

The following procedures are defined:

Test call back: the automatic generation of an outgoing call requested by the lower tester.

Test hook control: the remote control of the PTs hook switch by the lower tester. This allows automatic answering of incoming calls and automatic clearing of both incoming and outgoing calls.

Upper tester: the remote invocation of the FTs MM procedures by the lower tester.

15.8.1 Test call back procedure

The test call back procedure is used to request a PT to automatically call back. This is achieved by using the normal paging procedures, and then using {LCE-PAGE-REJECT} message including the <<REJECT-REASON>> element = test call back as in figure 128.

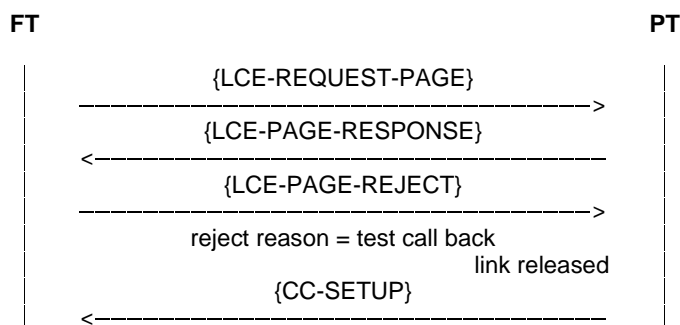


Figure 128: Test call back procedure

Upon receipt of the {LCE-PAGE-REJECT} message including the <<REJECT-REASON>> element = test call back, the PT shall perform the link release procedure as per clause 14.2.7, and then perform PT initiated call establishment as for a normal/emergency call request depending on the coding of reject reason.

The time taken for the PT to send {CC-SETUP} message upon receipt of the {LCE-PAGE-REJECT} message including the <<REJECT-REASON>> element = test call back shall be less than 10 seconds.

Dialling shall be initiated either as en-bloc or piecewise from the PT depending on the coding of reject reason and whether the PT implements piecewise dialling. Digits dialled shall be as per manufacturers declaration.

15.8.2 Test hook control procedures

Upon receipt of {CC-INFO} message during PT Call Control (CC) state T07 containing the <<TEST-HOOK-CONTROL>> element indicating hook value "off-hook", the PT shall act as though a MNCC_CONNECT-req primitive had been received and shall respond according to the procedures defined in clause 9.3.2.8.

Upon receipt of a {CC-INFO} message during PT Call Control (CC) states T02, T03, T04, T10, T08 containing a <<TEST-HOOK-CONTROL>> element indicating hook value "on-hook", the PT shall act as though a MNCC_RELEASE-req primitive had been received and shall release the call according to the procedures defined in clause 9.5.1.

15.8.3 Upper tester procedure

The upper tester procedure is used to invoke FT MM procedures as requested by the lower tester. This procedure should be implemented in the case where the MM procedures can not be invoked by other means at the test house (as declared by the manufacturer).

The LLME receives from the MAC layer the MAC test message {NETWORK-TEST}. Refer to EN 300 175-3 [3]. The coding of this message is defined in figure 129.




Figure 129: Upper tester procedure

Where:

- "id" indicates a NWK layer test message;
- "a_{ii}" indicates the bit positions in the MAC message.

Table 87: MM procedure parameters

| parameter | MM procedure invoked |
|-------------|---|
| 0000 1100 | Identification of PT |
| 0000 1110 | Temporary identity assignment |
| 0000 0000 | Authentication of PT |
| 0000 0001 | Authentication of user |
| 0000 1010 | Location update |
| 0000 0100 | Terminating access rights (FT initiated) |
| 0000 0010 | Key allocation |
| 0000 1000 | Parameter retrieval (info-suggest) |
| 0000 0110 | Ciphering (cipher-request) |
| other codes | reserved |

Upon receipt of the MAC test message, the LLME shall unconditionally invoke the indicated MM procedure within 2 seconds, by proceeding as though the equivalent MM primitive had been received. The MM procedure invoked shall use parameters as per manufacturers declaration.

15.9 Application assistance procedures

15.9.1 DECT Identity Resolution (Retrieval) Procedure

The DECT IDENTITY RESOLUTION procedure provides means for retrieving the IDENTITY of a DECT terminal, given an ADDRESS used by an application residing in or connected to this terminal.

The procedure may be used there is request for transmission of data from an application and the DECT terminal (e.g. a HyP) has knowledge for the application address of the desired recipient but does not know its DECT identity. Depending on the circumstances connectionless or connection oriented procedure may be used.

15.9.1.1 FT (or HyP) initiated Connectionless Identity Resolution procedure

The FT shall construct a Connectionless Identity Resolution REQUEST. The REQUEST shall include at least an "identity section" and an "address section". In the "identity section", the identity (or identities) of the terminals to which the REQUEST will be sent shall be included. Any identity allowed by the DECT protocol may be used and the request may be sent to all or group of terminals. In the "address section", the address (or addresses) of one or multiple applications for which the relevant DECT identities are inquired, shall be included.

Upon receipt of the REQUEST, the PTs shall check the provided with the REQUEST identity. If the identity matches to one of the PT identities, the PT shall compare the addresses provided with the REQUEST with its own application(s) addresses. If the PT finds addresses that match, the PT shall send back a Connectionless Identity Retrieval/Resolution RESPOND. The respond shall include the address (or addresses) that have been found to match and the PT's own identity.

If the identity received with the REQUEST does not match to one of the PT identities, or, if the addresses received with the REQUEST do not match to one of the PT application addresses, the PT shall ignore the request.

For the REQUEST and RESPOND the CLMS Fixed messages with <Protocol Discriminator> field set to "DECT Information Element coding" as defined in clause 8.3 should be used. For the Identity section the <<PortableIdentity>> or the <<Fixed Identity>> as defined in the present document shall be used as appropriate. For the address section, the <<Network Parameter>> information element as defined in clause 7.7.29 with <Discriminator> set to "Application Assigned" shall be used.

15.9.1.2 PT initiated Connectionless Identity Resolution procedure

The PT shall construct a Connectionless Identity Resolution REQUEST. The REQUEST shall include at least an "Address section". In the "Address section", the address (or addresses) of one or multiple applications for which the relevant DECT identities are inquired, shall be included. The PT shall send the REQUEST to the FT.

Upon receipt of the REQUEST, the FTs shall check the provided with the REQUEST addresses and shall determine whether there are addresses that match addresses of its own applications. If the FT finds addresses that match, the FT shall send back to the PT a Connectionless Identity Retrieval/Resolution RESPOND. The respond shall include the address (or addresses) that have been found to match, and the FT's own identity. Alternatively the FT may delay the RESPOND until it retrieves all identities.

If in the received REQUEST addresses are found that do not match the FT own applications addresses, the FT shall temporarily store those addresses and shall initiate a FT initiated Identity Retrieval/Resolution procedure for those addresses. When the procedure is completed and relevant identities are found the FT shall send back to the PT a Connectionless Identity Retrieval/Resolution RESPOND. The respond shall include the address (or addresses) that have been found to match, and the relevant identities.

For the REQUEST the CLMS Fixed messages with <Protocol Discriminator> field set to "DECT Information Element coding" as defined in clause 8.3 should be used. For the address section, the <<Network Parameter>> information element as defined in clause 7.7.29 with <Discriminator> set to "Application Assigned" shall be used.

15.9.1.3 Connection oriented Identity Resolution procedure

Alternatively to the connectionless procedure connection oriented procedures may be used as well. This procedure may be used for example by a HyP terminal to request address/identity mapping information which is assumed to be available at the Master.

If performed by a PP, the Parameter retrieval procedure as defined in the present document may be used. If performed by the FP, the PT Identification procedure defined in clause 13.2.1 may be used. Alternatively, exchange of {CC-INFO} messages during a call may be used. With the difference of replacing the connectionless messages with connection oriented, the procedure shall be as defined in the clauses for the connectionless case.

15.9.2 Application Address Resolution (Retrieval) Procedure

The APPLICATION AADDRESS RESOLUTION procedure provides means for retrieving the Address of an Application residing in or connected to a DECT terminal, given an DECT Identity of this terminal. An example for usage of this procedure is when the Distributed Communication is supported (see annex I) and a HyP needs to retrieve routing information for another members of the local DECT network.

The procedure implementation is similar to the described above Identity Resolution procedure with the only difference that the roles of the DECT Identity and Application addresses are replaced.

15.9.3 Application Parameter Allocation Procedure

The APPLICATION PARAMETER ALLOCATION PROCEDURE, provides means for allocating parameters (e.g. addresses) to of an Application residing in or connected to a DECT terminal.

15.9.3.1 FT initiated application parameter allocation procedure

The FT shall construct an APPLICATION-PARAMETER-ALLOCATION- REQUEST message. The REQUEST shall include at least a specially dedicated information element to indicate which application and which parameters are being assigned. The FT shall send the REQUEST to the PT.

Upon receipt of the REQUEST, the PTs shall check the provided with the REQUEST parameter and shall determine whether the parameter may be assigned to relevant application. If the indicated parameters can be assigned the PT shall send an APPLICATION-PARAMETER-ALLOCATION-ACCEPT message. If the assignment is not possible the PT shall send a APPLICATION-PARAMETER-ALLOCATION-REJECT message. The REJECT message may include a REJECT reason indicating the identified problem, and, may include one or more alternative proposals.

The Temporary Identity Assign procedure shall be used as specified in clause 13.2.2. The {TEMPORARY-IDENTITY-ASSIGN} message shall include a <<Network Parameter>> information element as defined in clause 7.7.29 with <Discriminator> set to "Application Assigned" indicating the relevant type of application and parameter.

15.9.3.2 PT initiated application parameter allocation procedure

The PT shall construct a APPLICATION-PARAMETER-ALLOCATION- REQUEST message. The REQUEST shall include at least a specially dedicated information element to indicate which application and which parameters are being assigned and in addition DECT Identity information to identify the DECT terminal to which the parameter is related. More than one identity and more than one application parameter may be provided. The PT shall send the REQUEST to the FT. IF the PT requests assignment for itself it shall include its own identity.

Upon receipt of the REQUEST, the FTs shall check the provided with the REQUEST identity and shall initiate the "FT initiated application parameter allocation procedure" (as described above) towards the terminal identified with the provided in the request identity. The outcome of this procedure the FT shall convey back to the initiating terminal by sending an APPLICATION-PARAMETER-ALLOCATION-ACCEPT or an APPLICATION-PARAMETER-ALLOCATION-REJECT message respectively.

The Parameter Retrieval procedure shall be used as specified in clause 13.7. The {MM-INFO-REQUEST} message shall include a <<Network Parameter>> information element as defined in clause 7.7.29 with <Discriminator> set to "Application Assigned" indicating the relevant type of application and parameter and a <<Portable Identity>> or <<Fixed Identity>> information element as appropriate.

15.9.4 Application parameter information procedure

The APPLICATION PARAMETER INFORMATION PROCEDURE, provides means to a DECT terminal participating in a local DECT network to request another DECT terminal to provide its application parameters, for example the address or the addresses of one or more application residing in or connected to another DECT terminal.

15.9.4.1 FT initiated connection oriented Application parameter information procedure

The FT shall construct a APPLICATION-PARAMETER-INFORMATION- REQUEST message. The REQUEST shall include at least a specially dedicated information element to indicate which application and which parameters are being requested. The FT shall send the REQUEST to the PT.

Upon receipt of the REQUEST, the PTs shall check the provided with the REQUEST parameter and shall send an APPLICATION-PARAMETER-INFORMATION-RESPOND message providing the requested parameters. If one or more of the requested parameters are not available the PT shall send APPLICATION-PARAMETER-INFORMATION-RESPOND with no application information.

The PT Identification procedure as defined in clause 13.2.1 may be used where the <<Identity Request>> message shall include an <<Identity type>> as defined in clause 7.7.19 information element and the <<Identity replay>> message shall include (when available) a <<Network Parameter>> information element as defined in clause 7.7.29 with <Discriminator> set to "Application Assigned".

15.9.4.2 PT initiated connection oriented Application parameter information procedure

The PT shall construct a APPLICATION-PARAMETER-INFORMATION- REQUEST message. The REQUEST shall include at least a specially dedicated information element to indicate which application and which parameters are being requested, as well as an identity to identify the terminal for which the information is enquired. The PT shall send the REQUEST to the FT.

Upon receipt of the REQUEST, the FTs shall check the provided with the REQUEST identity and parameter and shall determine whether it has the requested information. If the FT has the information it shall provide it back. If the information is not available the FT shall start an FT initiated information procedure towards the terminal indicated in the request. The outcome of this procedure the FT shall convey back to the initiating terminal by sending an APPLICATION-PARAMETER-INFORMATION-RESPOND or an APPLICATION-PARAMETER-INFORMATION-REJECT message respectively.

The Parameter retrieval procedure as defined in clause 13.7 shall be used. The <<MM Info Request>> message should include <<Portable Identity>> or <<Fixed Identity>> information element as appropriate, and an <<Info type>> information element indicating the application type as defined in clause 7.7.20. The <<MM Info Accept>> message shall include (when available) a <<Network Parameter>> information element as defined in clause 7.7.29 with <Discriminator> set to "Application Assigned".

15.9.4.3 FT initiated connectionless Application parameter information procedure

With this procedure the FT may request application parameters from group of terminals without establishing connections to each one of them. The FT shall construct a connectionless APPLICATION-PARAMETER-INFORMATION-REQUEST message. The REQUEST shall include an address section where for example group identity may be included when more than one terminal are requested to respond, as well as, at least a specially dedicated section to indicate which application and which parameters are being assigned. The FT shall send the REQUEST.

Upon receipt of the REQUEST, the PTs shall first check if the provided with the REQUEST address matches one of the terminals identities and if it does the terminal shall process the message and ignore it otherwise. IF the address matches, the PT shall check the provided application parameter indication and shall send an connectionless APPLICATION-PARAMETER-INFORMATION-RESPOND message providing the requested parameters. If one or more of the requested parameters are not available the PT shall send a connectionless APPLICATION-PARAMETER-INFORMATION-REJECT message. The REJECT message may include a REJECT reason indicating the identified problem.

For the REQUEST and RESPOND the CLMS Fixed messages with <Protocol Discriminator> field set to "DECT Information Element coding" as defined in clause 8.3 should be used. For the Identity section the <<PortbaleIdentity>> or the <<Fixed Identity>> as defined in the present document shall be used as appropriate. For the address section, the <<Identity type>> indicating the application type as defined in clause 7.7.19 and the <<Network Parameter>> information element as defined in clause 7.7.29 with <Discriminator> set to "Application Assigned" respectively shall be used.

15.9.4.4 PT initiated connectionless Application parameter information procedure

The PT shall construct a connectionless APPLICATION-PARAMETER-INFORMATION-REQUEST message. The REQUEST shall include at least a specially dedicated section to indicate which application and which parameters are being assigned, as well as, an Identity section to identify the terminal (or terminals) for which the information is enquired. The PT shall send the REQUEST to the FT.

Upon receipt of the REQUEST, the FTs shall check the provided with the REQUEST identity and parameter and shall determine whether it has the requested information. If the FT has the information it shall provide it back. If the information is not available the FT shall start an FT initiated information procedure towards the terminal (or terminals) indicated in the request. The outcome of this procedure the FT shall convey back to the initiating terminal by sending an connectionless APPLICATION-PARAMETER-INFORMATION-RESPOND or an APPLICATION-PARAMETER-INFORMATION-REJECT message respectively.

For the REQUEST and RESPOND the CLMS Fixed messages with <Protocol Discriminator> field set to "DECT Information Element coding" as defined in clause 8.3 should be used. For the Identity section the <<PortbaleIdentity>> or the <<Fixed Identity>> as defined in the present document shall be used as appropriate. For the address section, the <<Info type>> indicating the Application type and the <<Network Parameter>> information element as defined in clause 7.7.29 with <Discriminator> set to "Application Assigned" respectively shall be used.

15.9.5 Application Parameter Indication procedure

The APPLICATION PARAMETER INDICATION PROCEDURE provides means to a DECT terminal participating in a local DECT network to provide without request its application parameters for example the address or the addresses of one or more application residing in or connected to this terminal to another DECT terminal.

If a terminal wants to provide some of its application parameters to another DECT terminal it may either include the appropriate information element providing the application parameters in any DECT connection oriented message; or alternatively, the terminal may construct a special connectionless APPLICATION-PARAMETER-INDICATE message which includes at least a section with the identification of the application and the relevant parameters and submit it to one or more terminals using appropriate DECT identity address. The <<Network Parameter>> information element as defined in clause 7.7.29 with <Discriminator> set to "Application Assigned" respectively shall be used.

The procedure may be initiated by PT or by FT and may be used for update of the relevant entries in application/identity resolution tables. When used in a {DETACH} message the relevant entry may be deleted.

16 Primitives

16.1 Primitive types

Four primitive types may be used:

- req (request)
 - for a higher layer to request service from a lower layer;
- cfm (confirm)
 - for the layer providing the service to confirm that the activity has been completed;
- ind (indication)
 - for a layer providing a service to notify the next higher layer of any specific service related activity;
- res (response)
 - for a layer to acknowledge receipt of an indication primitive from the next lower layer.

The defined types for each category of primitive are shown as a list in curly brackets.

EXAMPLE: 7 MNCC_RELEASE- {req,cfm,ind }.

In this example, the defined types are request, confirm and indicate (but not response).

NOTE: These primitives are defined only for the purpose of describing layer-to-layer interactions. The primitives are defined as an abstract list of parameters, and their concrete realization may vary between implementations. No formal testing of primitives is intended. The following primitive definitions have no normative significance.

16.2 Primitives to lower layer (DLC layer)

The primitives used for communication to the DLC layer are described in EN 300 175-4 [4].

16.3 Primitives to IWU

This clause summarizes the primitives between the interworking unit and the NWK layer together with the list of associated parameters.

16.3.1 Parameter definitions

Endpoint identifiers: all primitives shall contain an endpoint identifier. This identifier shall be used to distinguish primitives related to different instances of call. The coding and use of these identifiers is a local matter, and is not defined in the present document. An identifier is defined for each entity as follows:

- Call Control Endpoint Identifier (CCEI);
- Supplementary Services Endpoint Identifier;
- COMS Endpoint Identifier (COEI);
- CLMS Endpoint Identifier (CLEI);
- Mobility Management Endpoint Identifier.

Message unit: each piece of higher layer (peer-to-peer) information that is included in the primitive is called a message unit. A series of one or more message units may be associated with each primitive where each separate unit is related to one information element in the corresponding NWK layer message. The list of message units is derived from the message definitions (clause 6) by reference to the information elements that may contain information from (or to) the IWU.

NOTE: The operations across the IWU/NWK layer boundary should be such that a layer sending a message can assume a temporal order of the bits within the message unit, and that the layer receiving the primitive can reconstruct the message with its assumed temporal order.

16.3.2 MNCC primitives

The following primitives are used:

- 1) MNCC_SETUP- {req, ind };
- 2) MNCC_SETUP_ACK- {req, ind };
- 3) MNCC_REJECT- {req, ind };
- 4) MNCC_CALL_PROC- {req, ind };
- 5) MNCC_ALERT- {req, ind };
- 6) MNCC_CONNECT- {req, cfm, ind, res };
- 7) MNCC_RELEASE- {req, cfm, ind, res };
- 8) MNCC_FACILITY- {req, ind };
- 9) MNCC_INFO- {req, ind };
- 10) MNCC_MODIFY- {req, cfm, ind, res };
- 11) MNCC_HOLD- {req, cfm, ind, res };
- 12) MNCC_RETRIEVE- {req, cfm, ind, res };
- 13) MNCC_IWU_INFO- {req, ind }.

16.3.2.1 MNCC_SETUP primitive

Table 88: MNCC_SETUP primitive

| PARAMETER | REQ | CFM | IND | RES |
|---|-------------------|-----|-----|-----|
| Call Control Endpoint Identifier (CCEI) | A | - | A | - |
| Message units (possible elements) | | | | |
| Basic Service | A | - | A | - |
| IWU attributes | O | - | O | - |
| Cipher info | O | - | O | - |
| Facility | O | - | O | - |
| Progress indicator | O | - | O | - |
| Display | O | - | O | - |
| Keypad | O | - | O | - |
| Signal | O | - | O | - |
| Feature activate | O | - | O | - |
| Feature indicate | O | - | O | - |
| Network parameter | O | - | O | - |
| Terminal capability | O | - | O | - |
| End-to-end compatibility | O | - | O | - |
| Rate parameters | O | - | O | - |
| Transit delay | O | - | O | - |
| Window size | O | - | O | - |
| Calling party number | O | - | O | - |
| Called party number | O | - | O | - |
| Called party subaddress | O | - | O | - |
| Sending complete | O | - | O | - |
| IWU-to-IWU | O | - | O | - |
| IWU-packet | O | - | O | - |
| A | = Always; | | | |
| O | = Optional; | | | |
| "-" | = Not applicable. | | | |

16.3.2.2 MNCC_SETUP_ACK primitive

Table 89: MNCC_SETUP_ACK primitive

| PARAMETER | REQ | CFM | IND | RES |
|---|-------------------|-----|-----|-----|
| Call Control Endpoint Identifier (CCEI) | A | - | A | - |
| Message units (possible elements) | | | | |
| Info type | O | - | O | - |
| Location area | O | - | O | - |
| Facility | O | - | O | - |
| Progress indicator | O | - | O | - |
| Display | O | - | O | - |
| Signal | O | - | O | - |
| Feature indicate | O | - | O | - |
| Transit delay | O | - | O | - |
| Window size | O | - | O | - |
| Delimiter request | O | - | O | - |
| IWU-to-IWU | O | - | O | - |
| IWU-packet | O | - | O | - |
| A | = Always; | | | |
| O | = Optional; | | | |
| "-" | = Not applicable. | | | |

16.3.2.3 MNCC_REJECT primitive

Table 90: MNCC_REJECT primitive

| PARAMETER | REQ | CFM | IND | RES |
|---|-------------------|-----|-----|-----|
| Call Control Endpoint Identifier (CCEI) | A | - | A | - |
| Cause | N | - | A | - |
| Message units (possible elements) | | | | |
| Release reason | A | - | A | - |
| Identity type | O | - | O | - |
| Location area | O | - | O | - |
| IWU attributes | O | - | O | - |
| Facility | O | - | O | - |
| Display | O | - | O | - |
| Feature indicate | O | - | O | - |
| Network parameter | O | - | O | - |
| IWU-to-IWU | O | - | O | - |
| IWU-packet | O | - | O | - |
| A | = Always; | | | |
| O | = Optional; | | | |
| "-" | = Not applicable. | | | |

The "cause" parameter shall indicate one of the following values:

- peer message (a valid peer message was received);
- local timer expiry (a local timer has expired).

The coding of this parameter is a local matter and is not specified in the present document.

16.3.2.4 MNCC_CALL_PROC primitive

Table 91: MNCC_CALL_PROC primitive

| PARAMETER | REQ | CFM | IND | RES |
|---|-------------------|-----|-----|-----|
| Call Control Endpoint Identifier (CCEI) | A | - | A | - |
| Message units (possible elements) | | | | |
| FacilityProgress indicator | O | - | O | - |
| Progress indicator | O | - | O | - |
| Display | O | - | O | - |
| Signal | O | - | O | - |
| Feature indicate | O | - | O | - |
| Transit delay | O | - | O | - |
| Window size | O | - | O | - |
| IWU-to-IWU | O | - | O | - |
| IWU-packet | O | - | O | - |
| A | = Always; | | | |
| O | = Optional; | | | |
| "-" | = Not applicable. | | | |

16.3.2.5 MNCC_ALERT primitive

Table 92: MNCC_ALERT primitive

| PARAMETER | REQ | CFM | IND | RES |
|--|-----|-----|-----|-----|
| Call Control Endpoint Identifier (CCEI) | A | - | A | - |
| Message units (possible elements) | | | | |
| Facility | O | - | O | - |
| Progress indicator | O | - | O | - |
| Display | O | - | O | - |
| Signal | O | - | O | - |
| Feature indicate | O | - | O | - |
| Terminal capability | O | - | O | - |
| Transit delay | O | - | O | - |
| Window size | O | - | O | - |
| IWU-to-IWU | O | - | O | - |
| IWU-packet | O | - | O | - |
| A = Always; O = Optional; "- " = Not applicable. | | | | |

16.3.2.6 MNCC_CONNECT primitive

Table 93: MNCC_CONNECT primitive

| PARAMETER | REQ | CFM | IND | RES |
|--|-----|-----|-----|-----|
| Call Control Endpoint Identifier (CCEI) | A | A | A | A |
| Message units (possible elements) | | | | |
| Facility | O | N | O | N |
| Progress indicator | O | N | O | N |
| Display | O | O | O | O |
| Signal | O | N | O | N |
| Feature indicate | O | O | O | O |
| Terminal capability | O | N | O | N |
| Transit delay | O | N | O | N |
| Window size | O | N | O | N |
| IWU-to-IWU | O | O | O | O |
| IWU-packet | O | O | O | O |
| A = Always; O = Optional; "- " = Not applicable; N = Not allowed. | | | | |

16.3.2.7 MNCC_RELEASE primitive

Table 94: MNCC_RELEASE primitive

| PARAMETER | REQ | CFM | IND | RES |
|---|----------------|-----|-----|-----|
| Call Control Endpoint Identifier (CCEI) | A | A | A | A |
| Cause | N | A | N | N |
| Message units (possible elements) | | | | |
| Release reason | O | O | O | O |
| Identity type | N | O | N | O |
| Location area | N | O | N | O |
| IWU attributes | N | O | N | O |
| Facility | O | O | O | O |
| Display | O | O | O | O |
| Feature indicate | O | O | O | O |
| Network parameter | N | O | N | O |
| IWU-to-IWU | O | O | O | O |
| IWU-packet | O | O | O | O |
| A | = Always; | | | |
| O | = Optional; | | | |
| N | = Not allowed. | | | |

The "cause" parameter shall indicate one of the following values:

- peer message (a valid peer message was received);
- local timer expiry (a local timer has expired).

The coding of this parameter is a local matter and is not specified in the present document.

16.3.2.8 MNCC_FACILITY primitive

Table 95: MNCC_FACILITY primitive

| PARAMETER | REQ | CFM | IND | RES |
|---|-------------------|-----|-----|-----|
| Call Control Endpoint Identifier (CCEI) | A | - | A | - |
| Message units (possible elements) | | | | |
| Facility | O | - | O | - |
| Progress indicator | O | - | O | - |
| Display | O | - | O | - |
| Keypad | O | - | O | - |
| Feature activate | O | - | O | - |
| Feature indicate | O | - | O | - |
| A | = Always; | | | |
| O | = Optional; | | | |
| "-" | = Not applicable. | | | |

16.3.2.9 MNCC_INFO primitive

Table 96: MNCC_INFO primitive

| PARAMETER | REQ | CFM | IND | RES |
|---|-------------------|-----|-----|-----|
| Call Control Endpoint Identifier (CCEI) | A | - | A | - |
| Message units (possible elements) | | | | |
| Location area | O | - | O | - |
| NWK assigned identity | O | - | O | - |
| Facility | O | - | O | - |
| Progress indicator | O | - | O | - |
| Display | O | - | O | - |
| Keypad | O | - | O | - |
| Signal | O | - | O | - |
| Feature activate | O | - | O | - |
| Feature indicate | O | - | O | - |
| Network parameter | O | - | O | - |
| Called party number | O | - | O | - |
| Called party subaddress | O | - | O | - |
| Sending complete | O | - | O | - |
| IWU-to-IWU | O | - | O | - |
| IWU-packet | O | - | O | - |
| A | = Always; | | | |
| O | = Optional; | | | |
| "-" | = Not applicable. | | | |

16.3.2.10 MNCC_MODIFY primitive

Table 97: MNCC_MODIFY primitive

| PARAMETER | REQ | CFM | IND | RES |
|---|-------------------|-----|-----|-----|
| Call Control Endpoint Identifier (CCEI) | A | A | | A |
| Success/Failure flag | N | A | | A |
| Message units (possible elements) | | | | |
| Service change info | A | O | A | O |
| IWU attributes | O | O | O | O |
| IWU-TO-IWU | O | O | O | O |
| A | = Always; | | | |
| O | = Optional; | | | |
| "-" | = Not applicable. | | | |

The Success/Failure flag shall indicate the outcome of the service modification.

16.3.2.11 MNCC_HOLD primitive

Table 98: MNCC_HOLD primitive

| PARAMETER | REQ | CFM | IND | RES |
|---|----------------|-----|-----|-----|
| Call Control Endpoint Identifier (CCEI) | A | A | A | A |
| Message units (possible elements) | | | | |
| Display | O | O | O | O |
| Reject reason | N | O | N | O |
| A | = Always; | | | |
| O | = Optional; | | | |
| N | = Not allowed. | | | |

16.3.2.12 MNCC_RETRIEVE primitive

Table 99: MNCC_RETRIEVE primitive

| PARAMETER | REQ | CFM | IND | RES |
|--|-----|-----|-----|-----|
| Call Control Endpoint Identifier (CCEI) | A | A | A | A |
| Message units (possible elements) | | | | |
| Display | O | O | O | O |
| Reject reason | N | O | N | O |
| A = Always; O = Optional; N = Not allowed. | | | | |

16.3.2.13 MNCC_IWU_INFO primitive

Table 100: MNCC_IWU_INFO primitive

| PARAMETER | REQ | CFM | IND | RES |
|---|-----|-----|-----|-----|
| Call Control Endpoint Identifier (CCEI) | A | - | A | - |
| Message units (possible elements) | | | | |
| Alphanumeric | O | - | O | - |
| IWU-TO-IWU | O | - | O | - |
| IWU-packet | O | - | O | - |
| A = Always; O = Optional; "-" = Not applicable. | | | | |

16.3.3 MNSS primitives

The following primitives are used:

- 1) MNSS_SETUP- {req, ind };
- 2) MNSS_FACILITY- {req, ind };
- 3) MNSS_RELEASE- {req, ind }.

16.3.3.1 MNSS_SETUP primitive

Table 101: MNSS_SETUP primitive

| PARAMETER | REQ | CFM | IND | RES |
|---|-----|-----|-----|-----|
| Supplementary Services Endpoint Identifier | A | - | A | - |
| Message units (possible elements) | | | | |
| Facility | O | - | O | - |
| Display | O | - | O | - |
| Keypad | O | - | O | - |
| Feature activate | O | - | O | - |
| Feature indicate | O | - | O | - |
| A = Always; O = Optional; "-" = Not applicable. | | | | |

16.3.3.2 MNSS_FACILITY primitive

Table 102: MNSS_FACILITY primitive

| PARAMETER | REQ | CFM | IND | RES |
|---|-----|-----|-----|-----|
| Supplementary Services Endpoint Identifier | A | - | A | - |
| Message units (possible elements) | | | | |
| Facility | O | - | O | - |
| Display | O | - | O | - |
| Keypad | O | - | O | - |
| Feature activate | O | - | O | - |
| Feature indicate | O | - | O | - |
| A = Always; O = Optional; "-" = not applicable. | | | | |

16.3.3.3 MNSS_RELEASE primitive

Table 103: MNSS_RELEASE primitive

| PARAMETER | REQ | CFM | IND | RES |
|---|-----|-----|-----|-----|
| Supplementary Services Endpoint Identifier | A | - | A | - |
| Message units (possible elements) | | | | |
| Release reason | O | - | O | - |
| Facility | O | - | O | - |
| Display | O | - | O | - |
| Keypad | O | - | O | - |
| Feature activate | O | - | O | - |
| Feature indicate | O | - | O | - |
| A = Always; O = Optional; "-" = Not applicable. | | | | |

16.3.4 MNCO primitives

The following primitives are used:

- 1) MNCO_SETUP- {req, ind };
- 2) MNCO_CONNECT- {req, ind };
- 3) MNCO_INFO- {req, ind };
- 4) MNCO_ACK { ind };
- 5) MNCO_RELEASE- {req, cfm, ind };
- 6) MNCO_REJECT- {req }.

16.3.4.1 MNCO_SETUP primitive

Table 104: MNCO_SETUP primitive

| PARAMETER | REQ | CFM | IND | RES |
|-----------------------------------|-------------------|-----|-----|-----|
| COMS Endpoint Identifier (COEI) | A | - | A | - |
| Message units (possible elements) | | | | |
| IWU attributes | A | - | A | - |
| Display | O | - | O | - |
| Called party number | O | - | O | - |
| Called party subaddress | O | - | O | - |
| IWU-to-IWU | O | - | O | - |
| IWU-packet | O | - | O | - |
| A | = Always; | | | |
| O | = Optional; | | | |
| "-" | = Not applicable. | | | |

16.3.4.2 MNCO_CONNECT primitive

Table 105: MNCO_CONNECT primitive

| PARAMETER | REQ | CFM | IND | RES |
|-----------------------------------|-------------------|-----|-----|-----|
| COMS Endpoint Identifier (COEI) | A | - | A | - |
| Message units (possible elements) | | | | |
| Display | O | - | O | - |
| IWU-to-IWU | O | - | O | - |
| IWU-packet | O | - | O | - |
| A | = Always; | | | |
| O | = Optional; | | | |
| "-" | = Not applicable. | | | |

16.3.4.3 MNCO_INFO primitive

Table 106: MNCO_INFO primitive

| PARAMETER | REQ | CFM | IND | RES |
|-----------------------------------|-------------------|-----|-----|-----|
| COMS Endpoint Identifier (COEI) | A | - | A | - |
| Message units (possible elements) | | | | |
| Display | O | - | O | - |
| Alphanumeric | O | - | O | - |
| IWU-to-IWU | O | - | O | - |
| IWU-packet | O | - | O | - |
| A | = Always; | | | |
| O | = Optional; | | | |
| "-" | = Not applicable. | | | |

16.3.4.4 MNCO_ACK primitive

Table 107: MNCO_ACK primitive

| PARAMETER | REQ | CFM | IND | RES |
|-----------------------------------|-------------------|-----|-----|-----|
| COMS Endpoint Identifier (COEI) | - | - | A | - |
| Message units (possible elements) | | | | |
| Display | - | - | O | - |
| A | = Always; | | | |
| O | = Optional; | | | |
| "-" | = Not applicable. | | | |

16.3.4.5 MNCO_RELEASE primitive

Table 108: MNCO_RELEASE primitive

| PARAMETER | REQ | CFM | IND | RES |
|---|-----|-----|-----|-----|
| COMS Endpoint Identifier (COEI) | A | A | A | - |
| Message units (possible elements) | | | | |
| Release reason | O | O | O | - |
| Display | O | O | O | - |
| IWU-to-IWU | O | O | O | - |
| IWU-packet | O | O | O | - |
| A = Always; O = Optional; "-" = Not applicable. | | | | |

16.3.4.6 MNCO_REJECT primitive

Table 109: MNCO_REJECT primitive

| PARAMETER | REQ | CFM | IND | RES |
|---|-----|-----|-----|-----|
| COMS Endpoint Identifier (COEI) | A | - | - | - |
| Message units (possible elements) | | | | |
| Release reason | O | - | - | - |
| Display | O | - | - | - |
| IWU-to-IWU | O | - | - | - |
| IWU-packet | O | - | - | - |
| A = Always; O = Optional; "-" = Not applicable. | | | | |

16.3.5 MNCL primitives

The following primitives are used:

- 1) MNCL_UNITDATA- {req, ind}.

16.3.5.1 MNCL_UNITDATA primitive

Table 110: MNCL_UNITDATA primitive

| PARAMETER | REQ | CFM | IND | RES |
|---|-----|-----|-----|-----|
| CLMS Endpoint Identifier (CLEI) | A | - | A | - |
| CLMS Message type (see note 1) | A | - | A | - |
| Message units (possible elements) | | | | |
| Alphanumeric | O | - | O | - |
| IWU-to-IWU (see note 2) | O | - | O | - |
| IWU-packet (see note 2) | O | - | O | - |
| A = Always; O = Optional; "-" = Not applicable. | | | | |
| NOTE 1: The CLMS message type parameter specifies the message format to be used, fixed or variable. | | | | |
| NOTE 2: If the CLMS message type is fixed, then only the Alphanumeric message unit is used. | | | | |

16.3.6 MM primitives

The following primitives are used:

- 1) MM_IDENTITY {req, cfm, ind, res};
- 2) MM_IDENTITY_ASSIGN {req, cfm, ind, res};
- 3) MM_AUTHENTICATE {req, cfm, ind, res};
- 4) MM_LOCATE {req, cfm, ind, res};
- 5) MM_DETACH {req, ind};
- 6) MM_ACCESS_RIGHTS {req, cfm, ind, res};
- 7) MM_ACCESS_RIGHTS_TERMINATE {req, cfm, ind, res};
- 8) MM_KEY_ALLOCATE {req, ind};
- 9) MM_INFO {req, cfm, ind, res};
- 10) MM_CIPHER {req, cfm, ind, res};
- 11) MM_IWU {req, ind}.

16.3.6.1 MM_IDENTITY primitive

Table 111: MM_IDENTITY primitive

| PARAMETER | REQ | CFM | IND | RES |
|---|----------------|-----|-----|-----|
| Mobility Management Endpoint Identifier | A | A | A | A |
| Message units (possible elements) | | | | |
| Identity type | A | N | A | N |
| Portable identity | N | O | N | O |
| Fixed identity | N | O | N | O |
| NWK assigned identity | N | O | N | O |
| IWU-TO-IWU | O | O | O | O |
| Model Identifier | N | O | N | O |
| A | = Always; | | | |
| O | = Optional; | | | |
| N | = Not allowed. | | | |

16.3.6.2 MM_IDENTITY_ASSIGN primitive

Table 112: MM_IDENTITY_ASSIGN primitive

| PARAMETER | REQ | CFM | IND | RES |
|---|--|-----|-----|-----|
| Mobility Management Endpoint Identifier | A | A | A | A |
| Accept/Reject flag (see note) | N | A | N | N |
| Message units (possible elements) | | | | |
| Portable identity | O | N | O | N |
| NWK assigned identity | O | N | O | N |
| Duration | O | N | O | N |
| Reject reason | N | O | N | O |
| IWU-TO-IWU | O | O | O | N |
| A | = Always; | | | |
| O | = Optional; | | | |
| N | = Not allowed. | | | |
| NOTE: | The Accept/Reject flag indicates the outcome of the procedure. | | | |

16.3.6.3 MM_AUTHENTICATE primitive

Table 113: MM_AUTHENTICATE primitive

| PARAMETER | REQ | CFM | IND | RES |
|---|--|-----|-----|-----|
| Mobility Management Endpoint Identifier | A | A | A | A |
| Accept/Reject flag (see note) | N | A | N | N |
| Message units (possible elements) | | | | |
| AUTH-TYPE | A | O | A | O |
| RAND | A | N | A | N |
| RES | O | O | O | O |
| RS | O | O | O | O |
| Cipher info | O | O | O | O |
| ZAP field | N | O | N | O |
| Service class | N | O | N | O |
| Key | N | O | N | O |
| Reject reason | N | O | N | O |
| IWU-TO-IWU | O | O | O | O |
| A | = Always; | | | |
| O | = Optional; | | | |
| N | = Not allowed. | | | |
| NOTE: | The Accept/Reject flag indicates the outcome of the procedure. | | | |

16.3.6.4 MM_LOCATE primitive

Table 114: MM_LOCATE primitive

| PARAMETER | REQ | CFM | IND | RES |
|---|--|-----|-----|-----|
| Mobility Management Endpoint Identifier | A | A | A | A |
| Accept/Reject flag (see note) | N | A | N | N |
| Message units (possible elements) | | | | |
| Portable identity | A | O | A | O |
| Fixed identity | O | N | O | N |
| Location area | O | O | O | O |
| NWK assigned identity | O | O | O | O |
| Cipher info | O | N | O | N |
| Reject reason | N | O | N | O |
| Setup capability | O | N | O | N |
| Terminal capability | O | N | O | N |
| Duration | N | O | N | O |
| IWU-TO-IWU | O | O | O | O |
| Model Identifier | O | O | O | O |
| A | = Always; | | | |
| O | = Optional; | | | |
| N | = Not allowed. | | | |
| NOTE: | The Accept/Reject flag indicates the outcome of the procedure. | | | |

16.3.6.5 MM_DETACH primitive

Table 115: MM_DETACH primitive

| PARAMETER | REQ | CFM | IND | RES |
|---|-------------------|-----|-----|-----|
| Mobility Management Endpoint Identifier | A | - | A | - |
| Message units (possible elements) | | | | |
| Portable identity | A | - | A | - |
| NWK assigned identity | O | - | O | - |
| IWU-TO-IWU | O | - | O | - |
| A | = Always; | | | |
| O | = Optional; | | | |
| "-" | = Not applicable. | | | |

16.3.6.6 MM_ACCESS_RIGHTS primitive

Table 116: MM_ACCESS_RIGHTS primitive

| PARAMETER | REQ | CFM | IND | RES |
|--|-----|-----|-----|-----|
| Mobility Management Endpoint Identifier | A | A | A | A |
| Accept/Reject flag (see note) | N | A | N | A |
| Message units (possible elements) | | | | |
| Portable identity | A | O | A | O |
| Fixed identity | N | O | N | O |
| Location area | N | O | N | O |
| AUTH-TYPE | O | O | O | O |
| Cipher info | O | O | O | O |
| Terminal capability | O | N | O | N |
| ZAP field | N | O | N | O |
| Service class | N | O | N | O |
| Model Identifier | O | N | O | N |
| Reject reason | N | O | N | O |
| Duration | N | O | N | O |
| IWU-TO-IWU | O | O | O | O |
| A = Always; O = Optional; N = Not allowed. NOTE: The Accept/Reject flag indicates the outcome of the procedure. | | | | |

16.3.6.7 MM_ACCESS_RIGHTS_TERMINATE primitive

Table 117: MM_ACCESS_RIGHTS_TERMINATE primitive

| PARAMETER | REQ | CFM | IND | RES |
|--|-----|-----|-----|-----|
| Mobility Management Endpoint Identifier | A | A | A | A |
| Accept/Reject flag (see note) | N | A | N | A |
| Message units (possible elements) | | | | |
| Portable identity | A | N | A | N |
| Fixed identity | O | N | O | N |
| Reject reason | N | O | N | O |
| Duration | N | O | N | O |
| IWU-TO-IWU | O | N | O | N |
| A = Always; O = Optional; N = Not allowed. NOTE: The Accept/Reject flag indicates the outcome of the procedure. | | | | |

16.3.6.8 MM_KEY_ALLOCATE primitive

Table 118: MM_KEY_ALLOCATE primitive

| PARAMETER | REQ | CFM | IND | RES |
|---|-----|-----|-----|-----|
| Mobility Management Endpoint Identifier | A | - | A | - |
| Message units (possible elements) | | | | |
| Allocate type | A | - | A | - |
| RAND | A | - | A | - |
| RS | A | - | A | - |
| A = Always; "- " = Not applicable. | | | | |

16.3.6.9 MM_INFO primitive

Table 119: MM_INFO primitive

| PARAMETER | REQ | CFM | IND | RES |
|--|-----|-----|-----|-----|
| Mobility Management Endpoint Identifier | A | A | A | A |
| Accept/Reject flag (see note) | N | A | N | A |
| Message units (possible elements) | | | | |
| Info type | A | O | A | O |
| Call identity | O | O | O | O |
| Portable identity | O | N | O | N |
| Fixed identity | O | O | O | O |
| Location area | O | O | O | O |
| NWK assigned identity | O | O | O | O |
| Network parameter | O | O | O | O |
| Reject reason | N | O | N | O |
| Duration | N | O | N | O |
| IWU-TO-IWU | O | O | O | O |
| A = Always; O = Optional; N = Not allowed. NOTE: The Accept/Reject flag indicates the outcome of the procedure. | | | | |

16.3.6.10 MM_CIPHER primitive

Table 120: MM_CIPHER primitive

| PARAMETER | REQ | CFM | IND | RES |
|--|-----|-----|-----|-----|
| Mobility Management Endpoint Identifier | A | A | A | A |
| Accept/Reject flag (see note) | N | A | N | A |
| Message units (possible elements) | | | | |
| Cipher info | A | O | A | O |
| Call identity | O | N | O | N |
| Connection identity | O | N | O | N |
| Reject reason | N | O | N | O |
| IWU-TO-IWU | O | N | O | N |
| A = Always; O = Optional; N = Not allowed. NOTE: The Accept/Reject flag indicates the outcome of the procedure. | | | | |

16.3.6.11 MM_IWU primitive

Table 120a: MM_IWU primitive

| PARAMETER | REQ | CFM | IND | RES |
|--|-----|-----|-----|-----|
| Mobility Management Endpoint Identifier | A | - | A | - |
| Accept/Reject flag (see note) | N | - | N | - |
| Message units (possible elements) | | | | |
| IWU-TO-IWU | O | - | O | - |
| IWU-PACKET | O | - | O | - |
| A = Always; O = Optional; N = Not allowed. NOTE: The Accept/Reject flag indicates the outcome of the procedure. | | | | |

17 Handling of error and exception conditions

All procedures transferring signalling information by using the values of protocol discriminators defined in the present document (see clause 7.2) are applicable only to those messages which pass the checks described in clauses 17.1 to 17.7.

Detailed error and exception handling procedures are implementation dependent and may vary. However, capabilities facilitating the orderly treatment of error or/and exception conditions are provided for in this clause and shall be provided in each implementation.

Clauses 17.1 to 17.7 are listed in order of precedence.

17.1 Protocol discrimination error

When a message is received with a protocol discriminator value that indicates a service that is not supported by the receiving entity, or that is coded as "unknown protocol entity", that message shall be ignored. "Ignore" means to do nothing, as if the message had never been received.

NOTE: Messages using the protocol discriminator values "unknown protocol entity" are expected to be routed to external (application specific) protocols. However, such coding represents an exception with regard to the protocols defined in the present document.

17.2 Message too short

When a message is received that is too short to contain a complete <<MESSAGE-TYPE>> information element, that message shall be ignored.

17.3 Transaction identifier error

17.3.1 Illegal and unsupported transaction identifier value

If the transaction identifier information element octet 1, bits 7 to 5 indicate an illegal value for the transaction value (i.e. a value that is not allowed in clause 7.3), then the message shall be ignored.

If the transaction identifier information element octet 1, bits 7 to 5 indicate the reserved value for TV extension, and if extended TVs are not supported by the receiving equipment, then the message shall be ignored.

17.3.2 Transaction identifier procedural errors and exception conditions

17.3.2.1 Unknown active CC call

Whenever any message except {CC-SETUP}, {CC-RELEASE}, {CC-RELEASE-COM} or (for FPs or PPs supporting the service change procedures of clause 9.6) {CC-SERVICE-CHANGE} is received specifying a transaction identifier which is not recognized as relating to an active call or to a call in progress, clearing should be initiated by sending a {CC-RELEASE-COM} message with release reason "unknown transaction identifier", using the same (unknown) transaction identifier in the returned message.

When a {CC-RELEASE} or a {CC-RELEASE-COM} message is received specifying a transaction identifier which is not recognized as relating to an active call or to a call in progress, no action should be taken.

When a {CC-SETUP} message is received specifying a transaction identifier which is not recognized as relating to an active call or to a call in progress, and with a transaction identifier flag incorrectly set to "1", this message shall be ignored.

When a {CC-SERVICE-CHANGE} message is received specifying a transaction identifier which is not recognized as relating to an active call, this message shall be ignored.

When a {CC-SETUP} message is received specifying a transaction identifier which is recognized as relating to an active call or to a call in progress, this {CC-SETUP} message shall be ignored.

17.3.2.2 Unknown active CISS call

Whenever a CISS entity receives a {FACILITY} message specifying a transaction identifier which is not recognized as relating to an active CISS-call or to a call in progress, clearing is initiated by sending a {CISS-RELEASE-COM} message with release reason "unknown transaction identifier", using the same (unknown) transaction identifier in the returned message.

17.3.2.3 Unknown active COMS call

Whenever any message except {COMS-RELEASE} or {COMS-RELEASE-COM} is received specifying a transaction identifier which is not recognized as relating to an active call or to a call in progress, clearing shall be initiated by sending a {COMS-RELEASE-COM} message with release reason "unknown transaction identifier", using the same (unknown) transaction identifier in the returned message.

When a {COMS-RELEASE} or a {COMS-RELEASE-COM} message is received specifying a transaction identifier which is not recognized as relating to an active call or to a call in progress, no action should be taken.

17.3.2.4 Unknown active CLMS call

Not applicable (there is no "ACTIVE" state for a CLMS call).

17.3.2.5 Unknown active MM transaction

Whenever a MM message is received neither specifying a transaction identifier which is recognized as relating to an initiated MM procedure nor being an allowed message initiating a new MM procedure, then this message should be ignored.

17.3.2.6 Unknown active LCE transaction

When a {LCE-PAGE-RESPONSE} message is received with a transaction identifier flag incorrectly set to "1", this message should be ignored.

17.3.3 Call Resource Contention

When a {CC-SETUP} message is received specifying a transaction identifier which is not recognized as relating to an active call or to a call in progress, one of two conditional actions shall be taken:

- if the resources exist to service the received call setup request, the request shall be handled as specified in clauses 9.3.1 and 9.3.2;
- if the resources do not exist to service the received call setup request, the request shall be rejected by sending a {CC-RELEASE-COM} message which should contain the release reason "insufficient resources", using the same (unknown) transaction value in the returned message.

17.4 Message type or message sequence errors

17.4.1 CC message error

Whenever an unexpected message, except {CC-RELEASE} or {CC-RELEASE-COM}, or an unrecognized message is received in any state, the message shall be ignored. Therefore no alternative abnormal release is allowed.

When an unexpected {CC-RELEASE} message is received (e.g. if a previous message was corrupted by undetected transmission errors), the message shall not be ignored, and the normal release procedures as specified in clause 9.5.1 shall be followed.

When an unexpected {CC-RELEASE-COM} message is received, the message shall not be ignored, and the abnormal release procedures as specified in clause 9.5.2 shall be followed.

17.4.2 CISS message error

Whenever an unexpected message, or an unrecognized message is received in any state, the message should be ignored.

17.4.3 COMS or CLMS message error

Whenever an unexpected message, or an unrecognized message is received in any state, the message should be ignored.

17.4.4 MM message error

Whenever an unexpected message, or an unrecognized message is received in any state, the message should be ignored.

17.4.5 LCE message error

Whenever an unrecognized message is received, it should be ignored.

17.5 General information element errors

The general information element error procedures may also apply to information elements in codesets other than codeset "0". In that case, the release reason information element defined for codeset "0" may be used to indicate errors in information elements other than those in codeset "0" by applying the locking or non-locking shift procedures as described in clause 7.5.4.

17.5.1 Information element out of sequence

A variable length information element which has a code value lower than the code value of the variable length information element preceding it shall be considered as an out of sequence information element.

If a message is received that contains an out of sequence information element, this information element may be ignored, and the receiving entity may continue to process the message. If this information is mandatory, and the receiving entity chooses to ignore this out of sequence information element, then the error handling procedure for missing mandatory information elements as described in clause 17.6.1 shall be followed. If the ignored information element is non-mandatory, the receiving entity shall continue to process the message.

NOTE: An implementation may choose to process all the information elements received in a message regardless of the order in which they are placed.

17.5.2 Duplicated information elements

If an information element is repeated in a message in which repetition of the information element is not expected, only the contents of information element appearing first shall be handled and all subsequent repetitions of the information element shall be ignored. When repetition of the information elements is permitted, only the contents of permitted information elements shall be handled. If the limit on repetition of information elements is exceeded, the contents of information elements appearing first up to the limit of repetitions shall be handled and all subsequent repetitions of the information element shall be ignored.

17.6 Mandatory information element errors

17.6.1 Mandatory information element missing in CC messages

When a message other than {CC-SETUP}, {CC-RELEASE} or {CC-RELEASE-COM} is received which has one or more mandatory information elements missing, the normal release procedure as described in clause 9.5.1 should be invoked. In this case, the {CC-RELEASE} message should use the release reason "mandatory information element missing".

Alternatively, the receiving entity may choose to maintain the call in which case no action should be taken on the message and no state change should occur.

When a {CC-SETUP} or {CC-RELEASE} message is received which has one or more mandatory information elements missing, a {CC-RELEASE-COM} message with release reason set to "mandatory information element missing" should be returned.

When a {CC-RELEASE-COM} message is received with a <<RELEASE-REASON>> information element missing, it shall be assumed that a {CC-RELEASE-COM} message was received with release reason "normal".

17.6.2 Mandatory information element content error in CC messages

When a message other than {CC-SETUP}, {CC-RELEASE} or {CC-RELEASE-COM} is received which has one or more mandatory information elements with invalid content, the normal release procedure as described in clause 9.5.1 should be invoked. In this case the {CC-RELEASE} message should use the release reason "invalid information element contents".

Alternatively, the receiving entity may choose to maintain the call in which case no action should be taken on the message and no state change should occur.

When a {CC-SETUP} or {CC-RELEASE} message is received which has one or more mandatory information elements with invalid content, a {CC-RELEASE-COM} message shall be returned. The message should indicate release reason "invalid information element contents".

When a {CC-RELEASE-COM} message is received with invalid content of the <<RELEASE-REASON>> information element, it will be assumed that a {CC-RELEASE-COM} message was received with release reason "normal".

This clause shall also apply to mandatory information elements with a length exceeding the maximum length (as given in clause 6).

17.6.3 Mandatory information element error in COMS or CLMS messages

When a message is received which has one or more mandatory information elements missing or has one or more mandatory information elements with invalid content, the message should be ignored.

Alternatively, when a {COMS-SETUP} message is received which has one or more mandatory information elements missing or with invalid content, a {COMS-RELEASE-COM} message with release reason "mandatory information element missing" or "invalid information element contents" as appropriate may be returned.

17.6.4 Mandatory information element error in MM messages

When a message is received which has one or more mandatory information elements missing or has one or more mandatory information elements with invalid content, the message should be ignored.

However, if the received message was a {TEMPORARY-IDENTITY-ASSIGN}, {AUTHENTICATION-REQUEST}, {LOCATE-REQUEST}, {ACCESS-RIGHTS-REQUEST}, {ACCESS-RIGHTS-TERMINATE-REQUEST}, {MM-INFO-REQUEST} or {CIPHER-REQUEST} message, then the corresponding reject message should be returned with the reject reason indicating "information element error" in the case of a missing mandatory information element, or indicating "invalid information element contents" in the case of a mandatory information element with a content error.

17.6.5 Mandatory information element error in LCE messages

When a message is received which has one or more mandatory information elements missing or has one or more mandatory information elements with invalid content, the message should be ignored.

However, if the received message is {LCE-PAGE-RESPONSE}, clearing shall be initiated by sending a {LCE-PAGE-REJECT} message.

17.7 Non-mandatory information element errors

The following clauses identify actions on information elements not recognized as mandatory.

17.7.1 Unrecognized information element

Action shall only be taken on the message and those information elements which are recognized and have valid content.

Subsequent actions in the event of an unrecognized information element are therefore determined by the sender of the unrecognized information elements.

17.7.2 Non-mandatory information element content error

When a message is received which has one or more non-mandatory information elements with invalid content, action shall only be taken on the message and those information elements which are recognized and have valid content. All other elements shall be discarded.

This clause shall also apply to non-mandatory information elements with a length exceeding the maximum length (as given in clause 6).

There are two exception to this treatment. The <<IWU-TO-IWU>> and <<IWU-PACKET>> information elements may be truncated and processed.

NOTE: The length of the <<IWU-TO-IWU>> and <<IWU-PACKET>> elements is variable up to several octets. These elements are deliberately placed at the end of all appropriate messages, such that they will be the first elements to suffer truncation in the event of buffer overflow.

17.8 Data link reset

Whenever the LCE is informed of a spontaneous data link layer reset by means of the DL_ESTABLISH-ind primitive, the following procedures apply:

- a) for CC calls in the "OVERLAP SENDING" and "OVERLAP RECEIVING" states, the entity shall initiate the normal release procedures as given in clause 9.5.1 with release reason "unknown";
- b) for CC calls in the "ACTIVE", "RELEASE PENDING" or "NULL" states no action shall be taken;
- c) for CC calls in the remaining establishment phase (states T-01, T-03, T-04, T-05, T-06, T-07, T-08, T-23 and F-01, F-03, F-04, F-06, F-07, F-23) and in any of the service change states, the call shall be maintained subject to the procedures contained in clause 9;
- d) for MM transactions, the transaction shall be maintained subject to the procedures contained in clause 13.

17.9 Data link failure

Whenever a LCE is notified by its data link entity via the DL_RELEASE-ind primitive that there is a data link layer failure, the following procedure shall apply:

- a) any calls not in the "ACTIVE" state shall be cleared internally;
- b) if the DL_RELEASE-ind primitive indicates "normal" release, any calls in the "ACTIVE" state shall also be cleared internally;
- c) if the DL_RELEASE-ind primitive indicates "abnormal" release, any calls in the "ACTIVE" state may be maintained, in which case the LCE should request link re-establishment from the DLC layer.

In case c), if the LCE requests DLC link re-establishment, it shall do this immediately by sending a DL_ESTABLISH-req primitive and shall start timer <LCE.04>. This shall only occur if at least one call is in the "ACTIVE" state. Otherwise, the LCE shall clear internally.

If timer <LCE.04> is already running, it shall not be restarted.

NOTE: If the transfer mode of the call is circuit-mode, the LCE may nonetheless choose to clear the call. If the transfer mode of the call is packet mode and the MAC layer is recognized as normal in spite of the data link failure, the LCE should not clear the call and should request data link re-establishment.

When informed of a successful DLC link re-establishment by means of the DL_ESTABLISH-cfm primitive, the LCE shall stop timer <LCE.04>.

If timer <LCE.04> expires prior to DLC link re-establishment, the LCE shall clear all of the associated calls.

Annex A (normative): System parameters

A.1 CC timers

All CC running timers except <CC.02> shall in addition to the conditions defined below be stopped upon following events:

- the <CC.02> timer is started;
- a {CC-RELEASE-COM} message is received or sent;
- the LCE is notified by the DLC via the DL_RELEASE-ind primitive that there is a data link failure.

When a timer is restarted by the means of a {CC-NOTIFY} message indicating "Timer restart" the timer shall be stopped and started from its initial value.

<CC.01> **Overlap sending timer.**

FT value: 20 seconds.

PT value: Not used.

Start: A {CC-SETUP -ACK} has been sent.

Stop: as soon as FT leaves "Overlap Sending" state.

<CC.02> **CC release timer.**

FT value: 36 seconds.

PT value: 36 seconds.

Start: A {CC-RELEASE} message is sent.

Stop: A {CC-RELEASE-COM} message is received.

<CC.03> **CC setup timer.**

FT value: 20 seconds.

PT value: 20 seconds.

Start: A {CC-SETUP} message has been sent.

Stop: An response message has been received.

<CC.04> **CC completion timer.**

FT value: 100 seconds.

PT value: 100 seconds.

Start: Refer to clause 9.3.

Stop: Refer to clause 9.3.

<CC.05> CC connect timer.

FT value: 10 seconds.

PT value: 10 seconds.

Start: A {CC-CONNECT} message has been sent.

Stop: A {CC-CONNECT-ACK} message is received.

In the direction FT-> PT {CC-CONNECT-ACK} applies only for external handover. Consequently, in the FP timer CC.05 only applies in case of external handover.

<CC_service> Service Change timer.

value: 20 seconds.

Start: {CC-SERVICE-CHANGE} message is sent.

Stop: An indication for link release from the DLC is received; A {CC-SERVICE-ACCEPT} or a {CC-SERVICE-REJECT} message is received; {CC-RELEASE}, {CC-RELEASE-COM} messages are sent or received.

<CC_segment.1> CC segments storage timer.

FT value: 5 seconds.

PT value: 5 seconds.

Start: The first segment of a segmented message is received.

Stop: The last segment is received.

A.2 SS timers

No timers defined.

A.3 COMS timers

<COMS.00> COMS storage timer.

FT value: 5 seconds.

PT value: 5 seconds.

Start: The first segment of a segmented message is received.

Stop: The last segment is received.

<COMS.01> COMS information acknowledge.

FT value: 2 seconds.

PT value: 2 seconds.

Start: A {COMS-INFO} message is sent.

Stop: A {COMS-ACK} message is received.

<COMS.02> COMS release timer.

FT value: 10 seconds.

PT value: 10 seconds.

Start: A {COMS-RELEASE} message is sent.
 Stop: A {COMS-RELEASE-COM} message is received.

<COMS.03> COMS setup timer.

FT value: 10 seconds.
 PT value: 10 seconds.
 Start: A {COMS-SETUP} message has been sent.
 Stop: An response message has been received.

A.4 CLMS timer

<CLMS.00> CLMS storage timer.

FT value: 5 seconds.
 PT value: 5 seconds.
 Start: The first segment of a segmented message has been received.
 Stop: The last segment is received.

A.5 MM timers

In addition to the conditions defined below an MM running timer except <MM_wait> shall also be stopped upon following events:

- a valid MM message has been received initiating a higher priority MM procedure, see clause 15.5;
- the LCE is notified by the DLC via the DL_RELEASE-ind primitive that there is a data link failure;
- applicable to PT only: PT sends an {AUTHENTICATION-REQUEST} message initiating the FT authentication procedure when another PT initiated MM procedure different from authentication of FT is still running.

In the case of a higher priority MM procedure interrupting a lower priority one the timer of the lower priority procedure shall be restarted on completion of the higher priority procedure starting from its initial value.

When a timer is restarted by the means of a {MM-NOTIFY} message indicating "Timer restart" the timer shall be stopped and started from its initial value. **<MM_access.1> Access rights timer.**

FT value: None.
 PT value: 60 seconds.
 Start: An {ACCESS-RIGHTS-REQUEST} message is sent.
 Stop: An {ACCESS-RIGHTS-ACCEPT} message or an {ACCESS-RIGHTS-REJECT} message is received.

<MM_access.2> Access rights termination timer.

FT value: 10 seconds.
 PT value: 20 seconds.
 Start: An {ACCESS-RIGHTS-TERMINATE-REQUEST} message is sent.

Stop: An { ACCESS-RIGHTS-TERMINATE-ACCEPT } message or an { ACCESS-RIGHTS-TERMINATE-REJECT } message is received.

<MM_auth.1> PT or FT authentication timer.

FT value: 10 seconds.

PT value: 10 seconds.

Start: An { AUTHENTICATION-REQUEST } message is sent.

Stop: An { AUTHENTICATION-REPLY } message or an { AUTHENTICATION-REJECT } message is received.

<MM_auth.2> User authentication timer.

FT value: 100 seconds.

PT value: 100 seconds.

Start: An { AUTHENTICATION-REQUEST } message is sent.

Stop: An { AUTHENTICATION-REPLY } message or an { AUTHENTICATION-REJECT } message is received.

<MM_cipher.1> FT cipher-switching timer.

FT value: 10 seconds.

PT value: None.

Start: A { CIPHER-REQUEST } message is sent.

Stop: A { CIPHER-REJECT } message or a DL_ENC_KEY-ind primitive is received.

<MM_cipher.2> PT cipher-switching timer.

FT value: None.

PT value: 10 seconds.

Start: A { CIPHER-SUGGEST } message is sent.

Stop: A { CIPHER-REQUEST } message or a { CIPHER-REJECT } message is received.

<MM_ident.1> Temporary identity PUI assignment timer.

FT value: 10 seconds.

PT value: None.

Start: A { TEMPORARY-IDENTITY-ASSIGN } message is sent.

Stop: A { TEMPORARY-IDENTITY-ASSIGN-ACK } message is received.

<MM_ident.2> Identification timer.

FT value: 10 seconds.

PT value: None.

Start: An { IDENTITY-REQUEST } message is sent.

Stop: An { IDENTITY-REPLY } message is received.

<MM_key.1> Key allocation timer.

FT value: 10 seconds.

PT value: None.

Start: A {KEY-ALLOCATE} message is sent.

Stop: An {AUTHENTICATION-REQUEST} message is received.

<MM_locate.1> Location timer.

FT value: None.

PT value: 20 seconds.

Start: A {LOCATE-REQUEST} message is sent.

Stop: A {LOCATE-ACCEPT} message or a {LOCATE-REJECT} message is received.

<MM_wait> Re-attempt timer.

FT value: None.

PT value: 5 minutes.

<MM_info.1> Parameter retrieval timer

FT value: None.

PT value: 5 seconds.

Start: A {MM-INFO-REQUEST} message is sent.

Stop: A {MM-INFO-ACCEPT} or a {MM-INFO-REJECT} message is received.

<MM_segment.1> MM segments storage timer.

FT value: 5 seconds.

PT value: 5 seconds.

Start: The first segment of a segmented message is received.

Stop: The last segment is received.

A.6 LCE timers

<LCE.01> Link release timer.

FT value: 5 seconds.

PT value: 5 seconds.

Start: A DL_RELEASE-req primitive is sent.

Stop: A DL_RELEASE-cfm primitive is received.

<LCE.02> Link maintain timer.

FT value: 10 seconds maximum, 3 seconds minimum.

PT value: 10 seconds maximum, 3 seconds minimum.

Start: A higher entity indicates partial release to the LCE.

Stop: A new higher entity message or a DL_DATA-ind with an SDU is received.

<LCE.03> {LCE-REQUEST-PAGE} message resubmission timer.

FT value: 3 seconds.

PT value: None.

Start: A {LCE-REQUEST-PAGE} message has been sent.

Stop: A matching response is received.

<LCE.04> Link suspend and resume timer.

FT value: 5 seconds.

PT value: 5 seconds.

Start: A link suspend or a link resume has been requested.

Stop: A matching response is received.

<LCE.05> DLC establish without SDU timer.

FT value: 5 seconds.

PT value: None.

Start: A DLC data link has been established after reception of a DL_ESTABLISH-ind without an SDU.

Stop: A new higher entity message or a DL_DATA-ind with an SDU is received.

A.7 NWK layer constants

N300: resubmission of an indirect link establish message.

N300 is an application specific value.

Recommended value for voice applications is 3.

N400: external handover release pending value.

Mandated value is 5.

A.8 Restart

Restart of a timer means restart from its initial value.

Annex B (normative): CC state transition tables

B.1 CC state transitions at PT side

B.1.1 CC state table at PT side

Table B.1: CC state table at PT side

| EVENT (CC message) | | STARTING STATE | | | | | | | | | | END STATE | |
|--------------------------------|--------|----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|--------------|-----|
| | | T00 | T01 | T02 | T03 | T04 | T06 | T07 | T08 | T10 | T19 | | |
| {CC-SETUP} | sent | P01 | | | | | | | | | | | T01 |
| {CC-SETUP} | rcvd | P08 | | | | | | | | | | | T06 |
| {CC-SETUP-ACK} | rcvd | | P03 | | | | | | | | | | T02 |
| {CC-CALL-PROC} | rcvd | | P05 | P05 | | | | | | | | | T03 |
| {CC-ALERTING} | rcvd | | P06 | P06 | P06 | | | | | | | | T04 |
| {CC-CONNECT} | rcvd | | P07 | P07 | P07 | P07 | | | | | | | T10 |
| {CC-CONNECT-ACK} | sent | | | | | | | | | | P28 | | T10 |
| {CC-CONNECT-ACK} | rcvd | | | | | | | | P11 | | | | T10 |
| {CC-SETUP} | accept | | | | | | P09 | | | | | | T07 |
| {CC-CONNECT} | sent | | | | | | P10 | P10 | | | | | T08 |
| {CC-INFO} | rcvd | | | P12 | P12 | P12 | | P12 | P12 | P12 | P19 | | * |
| {CC-INFO} | sent | | | P04 | P12 | P12 | | P12 | P12 | P12 | | | * |
| {CC-RELEASE} | sent | | P13 | P13 | P13 | P13 | | P13 | P13 | P13 | | | T19 |
| {CC-RELEASE} | rcvd | | | P20 | P20 | P20 | P20 | P20 | P20 | P20 | | | * |
| | | | | | | | | | | | P22 | | T00 |
| {CC-RELEASE-COM} | rcvd | | P14 | P14 | P14 | P14 | P14 | P14 | P14 | P14 | P22 | | T00 |
| {CC-RELEASE-COM} (reject) | sent | | | | | | P16 | | | | P16 | | T00 |
| {CC-RELEASE-COM} (response) | sent | | | P21 | P21 | P21 | P21 | P21 | P21 | P21 | | | T00 |
| {CC-NOTIFY} | rcvd | | P18 | P18 | P18 | P18 | | | P18 | | | | * |
| TIMEOUT | | | | P17 | P17 | P17 | | | P17 | | | | T19 |
| RELEASE TIMEOUT | | | | | | | | | | | P15 | | T00 |
| SETUP TIMEOUT | | | P27 | | | | | | | | | | T00 |

An entry "*" in the END STATE column indicates current state maintained. All unspecified events (blank entries in the above table) shall be treated according to the normal procedures given in clause 9 where defined. If not defined they shall be treated according to clause 17.4 (handling of errors for unexpected messages).

NOTE 1: States T-22 and T-23 are for further study.

NOTE 2: The PT may send CRSS ({FACILITY}) messages when in the CC state F-19. This will allow the user and network to initiate (and correspondingly acknowledge) supplementary services during call release procedure (e.g. advice of charge requested at the termination of the call).

NOTE 3: For segmentation purposes an {IWU-INFO} message can be sent/received in any state.

B.1.2 CC transition procedures at PT side

P01: MNCC_SETUP-req primitive received.

{CC-SETUP} message sent. Next state T-01.

P03: {CC-SETUP-ACK} message received. Next state T-02.

EITHER: start PT generated "dial" tone if provided;
install and connect the receive U-plane.

P04: Stop PT generated "dial" tone after first digit sent.

Send further digits. State T-02 maintained.

P05: {CC-CALL-PROC} message received. Next state T-03.

P06: {CC-ALERTING} message received. Next state T-04.

EITHER: start PT generated "called party alerting" tone;
continue to connect receive U-plane.

P07: {CC-CONNECT} message received.

Stop PT generated "called party alerting" tone.

Connect U-plane. Next state T-10.

P08: {CC-SETUP} message received.

Issue MNCC_SETUP-ind primitive. Next state T-06.

P09: MNCC_ALERT-req primitive received (user alerting has started).

Send {CC-ALERTING} message. Next state T-07.

P10: MNCC_CONNECT-req primitive received (e.g. user responds).

Send {CC-CONNECT} message. Next state T-08.

P11: {CC-CONNECT-ACK} message received. Connect U-plane (if not already connected).

Next state T-10.

P12: MNCC_INFO-req received; Send {CC-INFO} message.

or {CC-INFO} message received: issue MNCC_INFO-ind.

Current state maintained.

P13: MNCC_RELEASE-req primitive received.

{CC-RELEASE} message sent. Clear call.

Next state T-19.

P14: Receive {CC-RELEASE-COM} message.

Issue MNCC_REJECT-ind primitive. Clear call. Next state T-00.

P15: Release time-out. Send {CC-RELEASE-COM} message.

Issue MNCC_RELEASE-cfm primitive. Clear call. Next state T-00.

P16: Call rejected or MNCC_REJECT-req primitive received.

Send {CC-RELEASE-COM} message.

Clear call. Next state T-00.

P17: Send {CC-RELEASE} message. Reason = "timer expiry".

Next state T-19.

P18: {CC-NOTIFY} received.

Running timer restarted. Current state maintained.

P19: {CC-INFO} received. Issue MNCC_INFO primitive. Next state T-19.**P20: {CC-RELEASE} message received. Issue MNCC_RELEASE-ind primitive.**

Current state maintained.

P21: MNCC_RELEASE-res primitive received.

Send {CC-RELEASE-COM} message. Clear call. Next state T-00.

P22: {CC-RELEASE-COM} message or {CC-RELEASE} message received.

Issue MNCC_RELEASE-cfm primitive. Clear call. Next state T-00.

P23-P26: For further study.**P27: <CC.03> expires. Send {CC-RELEASE-COM} message.**

Issue MNCC_REJECT-ind primitive. Clear call. Next state T-00.

P28: MNCC_CONNECT-res received.

Send {CC-CONNECT-ACK} message.

Current state maintained.

ALL OTHER CASES: all unexpected messages shall be handled according to clause 9 (if described) or according to clause 17.4 (if not described).

B.2 CC state transitions at FT side

B.2.1 CC state table at FT side

Table B.2: CC state table at FT side

| EVENT (CC message) | | STARTING STATE | | | | | | | | | END |
|--------------------------------|------|----------------|-----|-----|-----|-----|-----|-----|-----|-----|-------|
| | | F00 | F01 | F02 | F03 | F04 | F06 | F07 | F10 | F19 | STATE |
| {CC-SETUP} | sent | Q01 | | | | | | | | | F06 |
| {CC-SETUP} | rcvd | Q08 | | | | | | | | | F01 |
| {CC-SETUP-ACK} | sent | | Q11 | | | | | | | | F02 |
| {CC-CALL-PROC} | sent | | Q09 | Q09 | | | | | | | F03 |
| {CC-ALERTING} | sent | | Q05 | Q05 | Q05 | | | | | | F04 |
| {CC-ALERTING} | rcvd | | | | | | Q06 | | | | F07 |
| {CC-CONNECT} | sent | | Q10 | Q10 | Q10 | Q10 | | | | | F10 |
| {CC-CONNECT} | rcvd | | | | | | Q07 | Q07 | | | F10 |
| {CC-CONNECT-ACK} | sent | | | | | | | | Q28 | | F10 |
| {CC-INFO} | sent | | | Q12 | Q12 | Q12 | | Q12 | Q12 | Q12 | * |
| {CC-INFO} | rcvd | | | Q04 | Q12 | Q12 | | Q12 | Q12 | Q12 | * |
| {CC-RELEASE} | sent | | | Q13 | Q13 | Q13 | Q13 | Q13 | Q13 | | F19 |
| {CC-RELEASE} | rcvd | | Q20 | Q20 | Q20 | Q20 | | Q20 | Q20 | Q22 | F00 |
| {CC-RELEASE-COM} | rcvd | | Q14 | Q14 | Q14 | Q14 | Q14 | Q14 | Q14 | Q22 | F00 |
| {CC-RELEASE-COM} (reject) | sent | | Q16 | Q16 | | | | | | Q16 | F00 |
| {CC-RELEASE-COM} (response) | sent | | Q21 | Q21 | Q21 | Q21 | | Q21 | Q21 | | F00 |
| {CC-NOTIFY} | sent | | Q18 | Q18 | Q18 | Q18 | | | | | * |
| TIMEOUT | | | | Q17 | Q17 | Q17 | | Q17 | | | F19 |
| RELEASE TIMEOUT | | | | | | | | | | Q15 | F00 |
| SETUP TIMEOUT | | | | | | | Q27 | | | | F00 |

An entry "*" in the END STATE column indicates current state maintained. All unspecified events (blank entries in table B.2) shall be treated according to the normal procedures given in clause 9 where defined. If not defined they shall be treated according to clause 17.4 (handling of errors for unexpected messages).

NOTE 1: States F-22 and F-23 are for further study.

NOTE 2: The FT may send CRSS ({FACILITY}) messages when in the CC state F-19. This will allow the user and network to initiate (and correspondingly acknowledge) supplementary services during call release procedure (e.g. advice of charge requested at the termination of the call).

NOTE 3: For segmentation purposes an {IWU-INFO} message can be sent/received in any state.

B.2.2 CC transition procedures at FT side

Q01: MNCC_SETUP-req primitive received.

Send {CC-SETUP} message to PT. Next state F-06.

Q04: {CC-INFO} message received.

Deliver <<KEYPAD>> element in MNCC_INFO-ind primitive.

State F-02 maintained.

Q05: MNCC_ALERT-req primitive received.

Send {CC-ALERTING} message. Next state F-04.

- Q06: {CC-ALERTING} message received.**
Issue MNCC_ALERT-ind primitive. Next state F-07.
- Q07: {CC-CONNECT} message received.**
Connect U-plane. Send {CC-CONNECT-ACK} message.
Issue MNCC_CONNECT-ind primitive. Next state F-10.
- Q08: {CC-SETUP} message received from PT.**
Issue MNCC_SETUP-ind primitive. Next state F-01.
- Q09: MNCC_CALL_PROC-req primitive received.**
Send {CC-CALL-PROC} message. Next state F-03.
- Q10: MNCC_CONNECT-req primitive received. Connect U-plane.**
Send {CC-CONNECT} message. Next state F-10.
- Q11: MNCC_SETUP_ACK-req primitive received.**
Send {CC-SETUP-ACK} message. Next state F-02.
- Q12: MNCC_INFO-req received; Send {CC-INFO} message.**
or {CC-INFO} message received: issue MNCC_INFO-ind.
Current state maintained.
- Q13: MNCC_RELEASE-req primitive received. Clear call.**
Send {CC-RELEASE} message. Next state F-19.
- Q14: Receive {CC-RELEASE-COM} message.**
Issue MNCC_REJECT-ind primitive. Clear call. Next state F-00.
- Q15: Release time-out. Send {CC-RELEASE-COM} message.**
Issue MNCC_RELEASE-cfm primitive. Clear call. Next state F-00.
- Q16: Call rejected, or MNCC_REJECT-req primitive received.**
Send {CC-RELEASE-COM} message. Clear call.
Next state F-00.
- Q17: Timer Expires. Send {CC-RELEASE} message.**
Reason = "timer expiry". Next state F-19.
- Q18: Timer needs to be restarted.**
Send {CC-NOTIFY} message. Current state maintained.
- Q20: {CC-RELEASE} message received. Issue MNCC_RELEASE-ind primitive.**
Current state maintained.
- Q21: MNCC_RELEASE-res primitive received.**
Send {CC-RELEASE-COM} message. Clear call. Next state F-00.
- Q22: {CC-RELEASE-COM} message or {CC-RELEASE} message received.**
Issue MNCC_RELEASE-cfm primitive. Clear call. Next state F-00.

Q23-Q26:For further study.

Q27: <CC.03> expires. Send {CC-RELEASE-COM} message.

Issue MNCC_REJECT-ind primitive. Clear call. Next state F-00.

Q28: {CC-CONNECT-ACK} message received.

Issue MNCC_CONNECT-cfm primitive. Stop timer <CC.05> Next state F-10.

ALL OTHER CASES: all unexpected messages shall be handled according to clause 9 (if described) or according to clause 17.4 (if not described).

Annex C (informative):
DLC states as viewed by the LCE

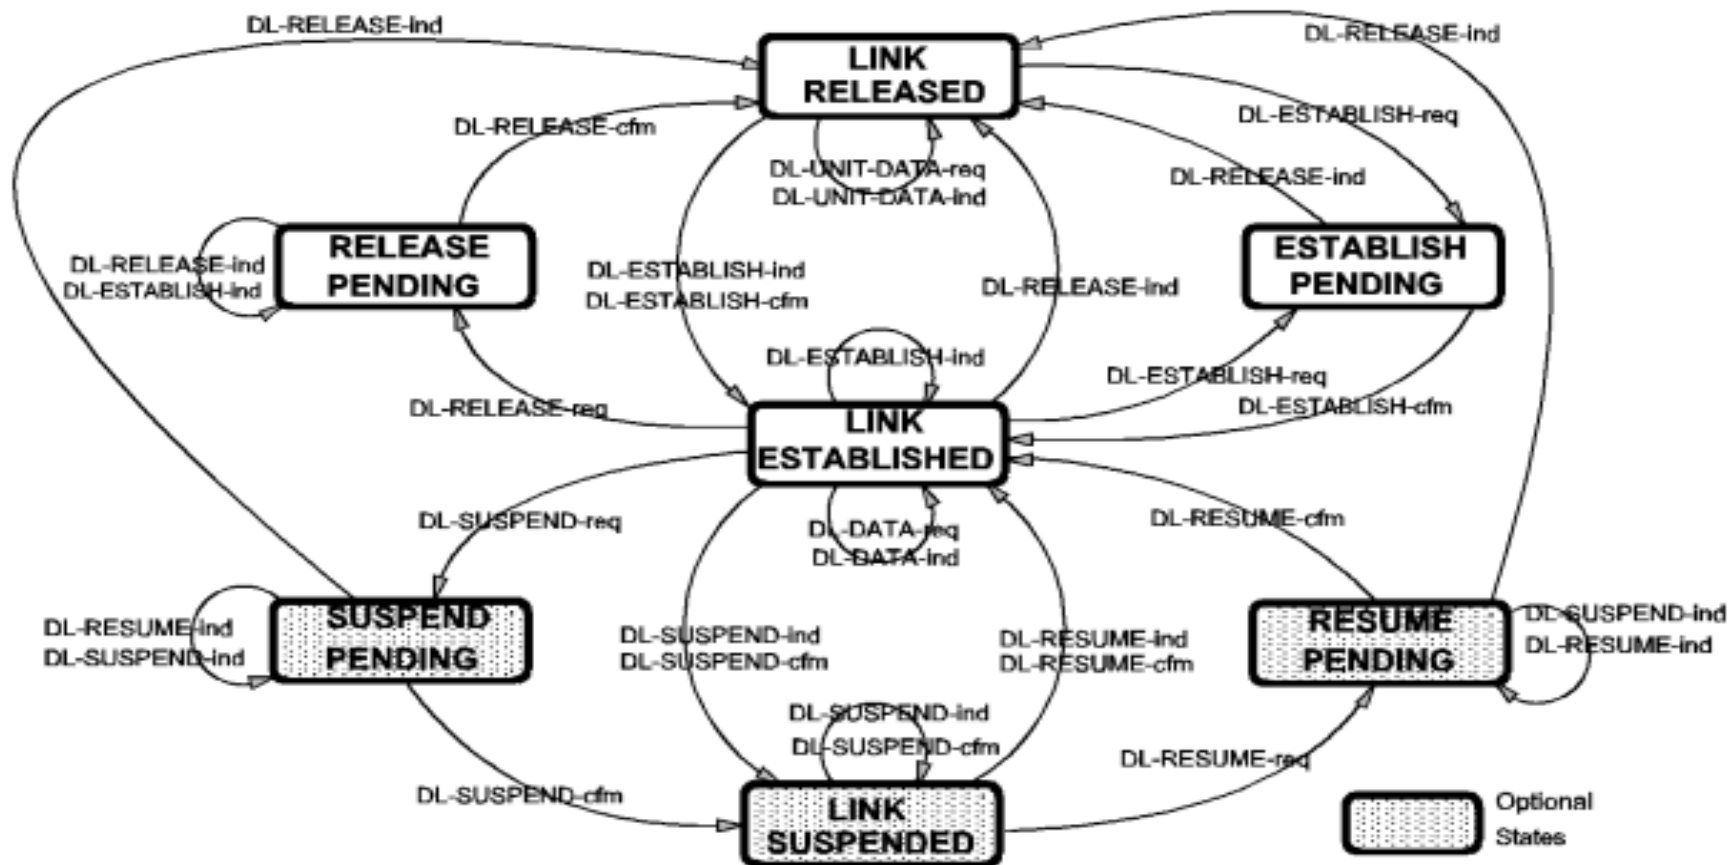


Figure C.1: DLC Link states as viewed by the LCE

Annex D (normative): DECT standard character sets

D.1 General

Two standard character sets are defined:

- DECT standard 8-bit characters;
- DECT standard 4-bit characters.

The DECT standard 8-bit characters shall be used for both dialling and display functions when contained in the following information elements:

- <<"KEYPAD">>;
- <<"DISPLAY">>;
- <<CALLED-PARTY-NUMBER>>;
- <<CALLING-PARTY-NUMBER>>.

Both the 8-bit and 4-bit DECT standard character sets may be carried in the <<ALPHANUMERIC>> information element or in the {CLMS-FIXED} message.

All of these elements may contain one or several characters.

D.2 DECT standard 8-bit characters

D.2.1 General

The first 128 characters shall use the standard IA5 characters, except for the first 32 (control) characters which are redefined as DECT "control codes".

NOTE 1: Refer to ITU-T Recommendation T.50 for details of IA5 characters.

The second 128 characters are called DECT "extended codes".

NOTE 2: The <<ALPHANUMERIC>> element allows for alternative character sets, including the complete standard IA5 character coding.

D.2.2 Control codes

Character codes 00 Hex to 1F Hex are specific to the DECT character set. They are not used in the standard IA5 sense. The following values are defined for cursor control (display purposes only) and dialling control:

Table D.1

| Code(Hex) | Control character |
|-----------|---|
| 00 | Null/cancel DTMF tone; |
| 02 | Return home; |
| 03 | Return end; |
| 05 | Dialling pause (see note 3); |
| 06 | Move forward to next column tab position (see note 1); |
| 07 | Move backward to next column tab position (see note 1); |
| 08 | Move backward one column; |
| 09 | Move forward one column; |
| 0A | Move down one row; |
| 0B | Move up one row; |
| 0C | Clear display (and return home); |
| 0D | Return (to start of current row); |
| 0E | Flash off (see note 2); |
| 0F | Flash on (see note 2); |
| 11 | XON (resume transmission); |
| 12 | Go to pulse dialling; |
| 13 | XOFF (stop transmission); |
| 14 | Go to DTMF dialling; defined tone length; |
| 15 | Register recall (see note 4) |
| 16 | Go to DTMF dialling; infinite tone length; |
| 17 | Internal call (see note 5) |
| 18 | Service call (see note 6) |
| 19 | Clear to end of display (maintain cursor position); |
| 1A | Clear to end of line (maintain cursor position); |
| 1B | ESC. ESCape in the IA5 sense; |

All other values reserved.

NOTE 1: Column tabs should be set at 10 column intervals.

NOTE 2: Flash on/Flash off is a toggle action that applies to all subsequent display characters.

NOTE 3: The duration of the dialling pause is determined by the FT.

The dialling characteristics (pulse duration and DTMF defined tone length) are determined by the FT. DTMF tones shall conform to Multi-Frequency Push Button (MFPB) tones as defined in EN 300 001 [15].

PT controlled DTMF pulse duration is supported by using "go to DTMF; infinite tone length" following by the selected digit. The tone shall be stopped upon receipt of any other character (e.g. another digit). To terminate an infinite tone with no other action the "null" character shall be used.

NOTE 4 Register recall: to seize a register (with dial tone) to permit input of further digits or other action. The transfer of dial digits towards the register should be done using the keypad protocol.

NOTE 5: A call from one user to another user within the domain of 1 FP. This is typically useful in residential environments.

NOTE 6: A call initiated by a DECT PT for entering of FT related service and adjustment procedures in a transparent way.

D.2.3 Standard IA5 codes

Character codes 20 Hex to 7F Hex shall be used in the standard IA5 sense as defined in ITU-T Recommendation T.50. The International Reference Version (IRV) characters shall be used.

D.2.4 extended codes and escape to alternative character sets

Character codes 80 Hex to FF Hex may be used for extended character sets. Extended character sets shall be designated and invoked by use of escape sequences in accordance with ISO/IEC 2022 [13] for 8-bit environments. The following requirements shall apply to ensure compatibility.

To allow independent operation of different CC/COMS/CISS instances, escape sequences in display information elements shall only affect the CC/COMS/CISS instance to which the information element relates.

Additional character sets (for which the PT indicates support in <<TERMINAL-CAPABILITY>> information element) may be designated to the G0, G1, G2 or G3 set. The DECT standard character set (IA5) shall by default be designated to the G0 set. If the PT indicates support of only one additional character set this character set shall by default be designated to the G1 set. The G0 set shall by default be invoked at the lower part of the address space and the G1 set at the upper part of the address space. Default designations and invocations shall always be used when a new CC/COMS/CISS instance is created.

A PT indicating support of more than one additional character set should be able to correctly interpret the escape sequences for designation of all supported character sets to the G1, G2 and G3 sets. Furthermore it should at least be able to correctly interpret the escape sequences for the locking-shift functions LS1R, LS2R and LS3R plus the single-shift functions SS2 and SS3. The SS2 and SS3 functions should by default be assigned to the relevant codings in the C1 control character set.

If proprietary character sets are needed they should be designated to the G3 set.

D.3 DECT standard 4-bit characters

Table D.2

| Code(Hex) | Character: |
|-----------|------------|
| 0 | 0 |
| 1 | 1 |
| 2 | 2 |
| 3 | 3 |
| 4 | 4 |
| 5 | 5 |
| 6 | 6 |
| 7 | 7 |
| 8 | 8 |
| 9 | 9 |
| B | (space) |

All other values reserved.

Annex E (normative): Default coding of <<IWU-ATTRIBUTES>> and <<CALL-ATTRIBUTES>> information elements for basic speech

Table E.1: Default coding for <<IWU-ATTRIBUTES>> information element

| Octet | Information element field | Field Value |
|-------|---------------------------------|---------------------|
| 3 | Coding standard | DECT standard |
| | Information transfer capability | Speech |
| 4 | Negotiation indicator | Not possible |
| | External connection Type | Connection oriented |
| 5 | Transfer mode | Circuit mode |
| | Information transfer rate | 32 kbit/s |
| 6 | Protocol identifier | User protocol ID |
| | User protocol ID | G.721 ADPCM |

Table E.2: Default coding for <<CALL-ATTRIBUTES>> information element

| Octet | Information element field | Field Value |
|-------|---------------------------|-------------------|
| 3 | Coding standard | DECT standard |
| | Network layer attributes | Basic speech |
| 4 | C-plane class | Class A; shared |
| | C-plane transfer rate | CS only |
| 5 | U-plane symmetry | Symmetric |
| | LU identification | LU1 |
| 6 | U-plane class | Class 0 min_delay |
| | U-plane frame type | FU1 |

Annex F (normative): Broadcast attributes coding

F.1 Higher layer capabilities

The broadcast attributes are a small set of NWK layer and DLC layer capabilities (jointly known as "higher layer capabilities") that shall be broadcast regularly as part of the MAC layer broadcast service.

NOTE 1: These "higher layer" attributes comprise a total of 20 bits of information. These bits are combined with lower layer attributes in the MAC layer to form a single MAC layer broadcast message. Refer to EN 300 175-3 [3].

Table F.1: Broadcast attributes coding

| BIT NUMBER (see note) | ATTRIBUTE ("1" means that service is available) |
|---|--|
| a32 | ADPCM/G.726 Voice service |
| a33 | GAP basic speech |
| a34 | Non-voice circuit switched service |
| a35 | Non-voice packet switched service |
| a36 | Standard authentication required |
| a37 | Standard ciphering supported |
| a38 | Location registration supported |
| a39 | SIM services available |
| a40 | Non-static Fixed Part (FP) |
| a41 | CISS services available |
| a42 | CLMS service available |
| a43 | COMS service available |
| a44 | Access rights requests supported |
| a45 | External handover supported |
| a46 | Connection handover supported |
| a47 | Reserved |
| NOTE: The bit numbers refer to the bit positions in the MAC message. Refer to clause 7.2.3.4.2 in EN 300 175-3 [3]. | |

NOTE 2: The default setting for all bits is "0"; meaning "not available".

NOTE 3: The value of any bit might change during normal operation.

F.2 Extended higher layer capabilities

If a profile is supported or a capability provided, then the bit corresponding to that profile is set to 1; otherwise (if profile/capability is not supported) the bit is set to 0.

Table F.2: Extended higher layer capabilities

| BIT NUMBER | Profile Supported |
|-------------------|---|
| a47 | ISDN Data Services |
| a46 | DPRS FREL |
| a45 | DPRS Stream |
| a44 | Data Service Profile D |
| a43 | LRMS |
| a41 | Asymmetric bearers supported |
| a40 | Emergency call supported |
| a39 | Location registration with TPUI allowed |
| a38 | Synchronization to GPS achieved |
| a37 | ISDN intermediate system |
| a36 | RAP Part 1 Profile |
| a33 | V.24 |
| a32 | PPP |
| a31 | IP |
| a30 | Token Ring |
| a29 | Ethernet |
| a28 | IP Roaming unrestricted supported |

NOTE 1: The bit numbers refer to the bit positions in the MAC message. Refer to EN 300 175-3 [3], clause 7.2.3.5.

NOTE 2: The default setting for all bits is "0"; meaning "not available".

Annex G (normative): Use of <<IWU-PACKET>> and <<IWU-TO-IWU>> information elements

G.1 General

The <<IWU-PACKET>> and <<IWU-TO-IWU>> are transparent information elements (refer to clause 6.1.2). They are defined to provide two alternative mechanisms for the transparent transportation of external information (e.g. from a PP application to an FP interworking unit). The two elements correspond to two possible structures of external information.

NOTE 1: The <<IWU-TO-IWU>> element provides a capability equivalent to the <<USER-TO-USER>> information element defined in EN 300 403-1 [8].

NOTE 2: The <<IWU-TO-IWU>> information element is used as well to exchange DECT profile specific information between the peer interworking units.

G.2 Sending of <<IWU-PACKET>> elements

G.2.1 CC and MM use of <<IWU-PACKET>>

An unsegmented <<IWU-PACKET>> may be carried in most CC and MM messages provided that each message contains at most one <<IWU-PACKET>> information element. A segmented <<IWU-PACKET>> shall only be sent in a series of {IWU-INFO} or {MM-IWU} messages, and each {IWU-INFO}/{MM-IWU} message shall contain one <<IWU-PACKET>> element preceded by a <<SEGMENTED-INFO>> element. A {IWU-INFO} message should be used if there are no suitable CC messages scheduled for transmission. A {MM-IWU} message should be used if there are no suitable MM messages scheduled for transmission.

G.2.2 COMS and CLMS use of <<IWU-PACKET>>

An unsegmented or a segmented <<IWU-PACKET>> may be sent in a series of {COMS-INFO} or {CLMS-VARIABLE} messages. If segmented, each message shall contain one <<IWU-PACKET>> element preceded by a <<SEGMENTED-INFO>> element.

G.2.3 Rejection of <<IWU-PACKET>> elements

The <<IWU-PACKET>> element shall be used to reject any <<IWU-PACKET>> element that is received but cannot be understood (i.e. contains a protocol discriminator coding that is not supported). In this event the element shall indicate rejection (using the S/R bit) and shall contain a partial echo of the message that has been rejected. This echo shall only contain the L2 protocol discriminator and the following octet (i.e. in most cases the echoed information will be truncated). A rejection element shall be returned immediately after receiving the message containing the rejected element.

G.3 Use of <<IWU-TO-IWU>> elements

G.3.1 Sending of <<IWU-TO-IWU>> elements

An unsegmented <<IWU-TO-IWU>> may be carried in most CC or MM messages. An {IWU-INFO} message may be used for transmission of unsegmented <<IWU-TO-IWU>> elements, if there are no suitable CC messages scheduled for transmission. A {MM-IWU} message should be used if there are no suitable MM messages scheduled for transmission.

A CC related segmented <<IWU-to-IWU>> shall only be sent in a sequence of {IWU-INFO} messages, and each message shall carry only one <<IWU-TO-IWU>> element, and each of these <<IWU-TO-IWU>> elements shall be preceded by a <<SEGMENTED-INFO>> element. When sent during MM procedures the first segment of a segmented <<IWU-TO-IWU>> may be included in any valid MM message, whereas the following segment shall be sent in a sequence of <<MM-IWU>> messages each message carrying only one <<IWU-TO-IWU>> element, and each of these <<IWU-TO-IWU>> elements preceded by a <<SEGMENTED-INFO>> element.

Segmented or unsegmented <<IWU-TO-IWU>> elements may be carried in {COMS-INFO} or {CLMS-VARIABLE} messages.

G.3.2 Rejection of <<IWU-TO-IWU>> elements

The <<IWU-TO-IWU>> element shall also be used to reject any <<IWU-TO-IWU>> element that is received but cannot be understood (i.e. contains a protocol discriminator coding that is not supported). In this event the element shall indicate rejection (using the S/R bit) and shall contain a partial echo of the message that has been rejected. This echo shall only contain the protocol discriminator and the first information octet of the rejected message (i.e. in most cases the echoed information will be truncated). A rejection element shall be returned immediately after receiving the message containing the rejected element.

Annex H (normative): Transaction identifier flags (TIF) assignment in MM procedures

H.1 General

Implicit in annex H is the assumption that an MM procedure may consist of one or more transactions. Each transaction is owned by a single instance of an MM entity. Each instance of an MM entity may own only a single transaction. The priority level (as it is specified in clause 15.5) relates to the transaction, and not to the procedure.

H.2 Nested procedures

TI-flags, in case of nested procedures (two procedures A and B are qualified as being nested if procedure B begins and is accomplished after procedure A has been started and before procedure A has been accomplished) shall be allocated independently.

EXAMPLE 1: A FT initiated procedure for identification of PT is interrupted by a PT initiated authentication of FT procedure.

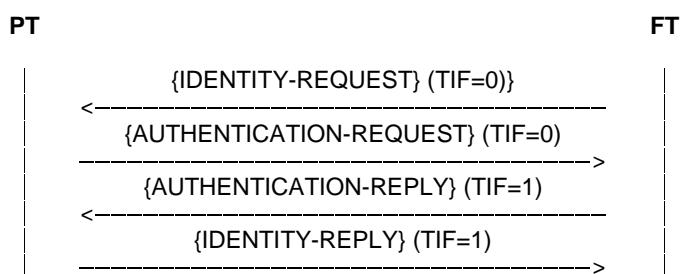


Figure H.1: Nested procedure, example 1

EXAMPLE 2: A PT initiated procedure for location registration is interrupted by a FT initiated authentication of PT procedure.

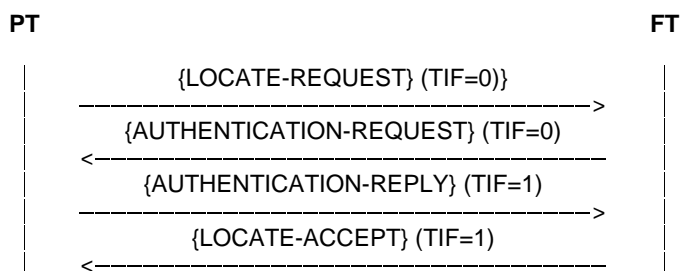


Figure H.2: Nested procedure, example 2

The setting of transaction flags shall be the same in any similar situation.

H.3 Stand alone procedures

H.3.1 Location update procedure

Location update procedure is a single procedure using two transactions that may be described as FT suggesting location registration and PT performing location registration. The TIF shall be allocated as follows:

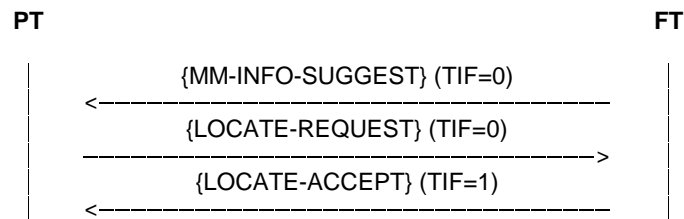


Figure H.3: Location update procedure

In the situation where the {MM-INFO-SUGGEST} interrupts a priority level 3 PT-initiated procedure the PT shall complete the interrupted procedure before initiating the location registration procedure.

H.3.2 Location registration procedure with temporary identity assignment

Location registration procedure with temporary identity assignment consists of one transaction. This transaction has priority level 3. The PT shall not attempt to authenticate the FT during this procedure. The TIF shall be allocated as follows:

Case 1:

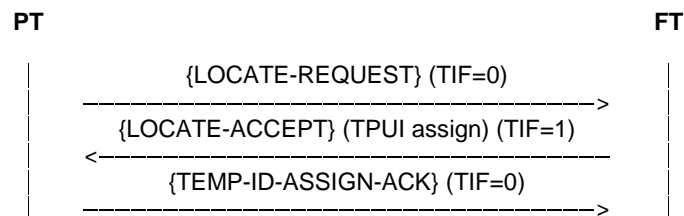


Figure H.4: TIF allocation, case 1

Case 2:

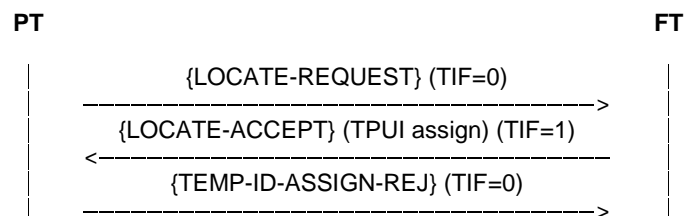


Figure H.5: TIF allocation, case 2

H.3.3 PT initiated cipher switching

Cipher switching initiated by PT procedure consists of one priority level 3 transaction. The TIF shall be allocated as follows:

Case 1:

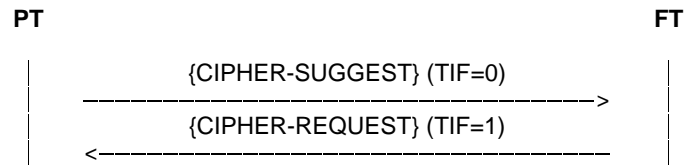


Figure H.6: PT initiated cipher switching, case 1

Case 2:

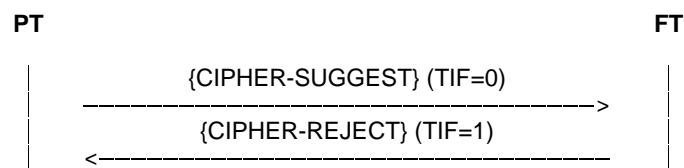


Figure H.7: PT initiated cipher switching, case 2

Case 3:

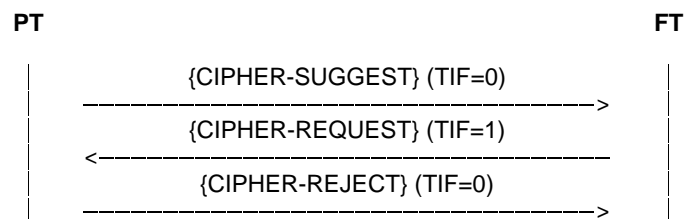


Figure H.8: PT initiated cipher switching, case 3

H.3.4 Key allocation

Key allocation procedure consists of one priority level 2 transaction. The PT shall not attempt to authenticate the FT during this procedure. The TIF shall be allocated as follows:

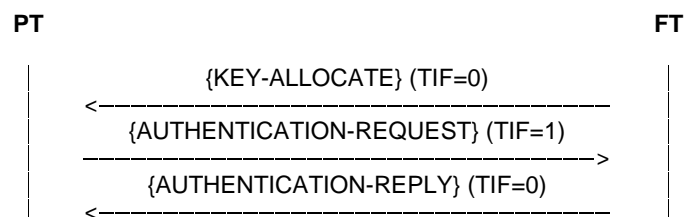


Figure H.9: Key allocation

H.4 External protocol information procedure

The External protocol information procedure represents a special case of an MM procedure that may be used as a stand alone procedure as well as a part of a running MM procedure when used to carry additional segments of information needed for the successful completion of the MM procedure.

When used as a stand alone procedure the rules specified in H.3 should apply. If used for providing additional information to a running MM procedure the {MM-IWU} message shall have the same TI as the MM message carrying the first segment of the information.

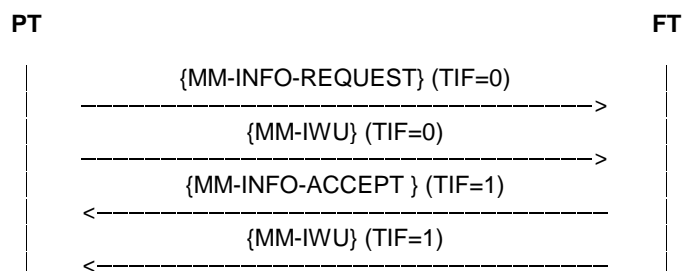


Figure H.10: Parameter retrieval procedure example

Annex I (normative): Distributed Communications

I.1 Introduction

Annex I describes the DECT concept for Distributed communications to allow direct communication between two or more terminals without relaying the communications links via a FT or WRS.

The main goal is to provide more bandwidth for a set of terminals working together in a DECT system. Though the main target are DECT DATA local networking there are no limitations enforced by the concept on applying the idea on voice terminals as well.

Some of the requirements and procedures described in annex I later on are closely related to requirements specified in other parts of EN 300 175, e.g. Part 3 - MAC. However, in order to ease the understanding the approach has been taken to keep the concept specific requirements together (i.e. in the present document) and not spread the over a number of documents.

I.2 General Requirements

I.2.1 DCDL-net

A DL-net that supports Distributed communications (DCDL-net) shall:

- have allocated a MASTER terminal to determine the intra-network synchronization and provide common for the DCDL-net information and control. If there is a terminal that is intended for constant operation (e.g. the terminal that provides voice services to an external network and is not intended to be frequently powered-down) this should be allocated as MASTER;
- maintain for the whole time of its existence a DCDL-net System Control Bearer transmitted by the MASTER; if the MASTER is to switch-off or leave it should assign another active member as the new MASTER; the System Control Bearer should be a connectionless bearer and shall continuously provide information about the currently active members; all active DCDL-net members shall synchronize to the System Control Bearer, i.e. to the MASTER and shall continuously listen to it and retrieve the necessary information to maintain its communication within the DCDL-net;
- possess (meaning every member of the DCDL-net shall independently possess) a Common Subscription Database (CSDb) including: common to all members AC, DCK, PLI and LAL (provision of every single value depends on the support of a particular feature); List with all members distinguished by their identification number (IdN); Information for all members including RFPI, PARK, IPUI and TPUI, terminal capabilities, etc.;
- provide means of control of the usage of the resource throughout the DCDL-net by advising reduction of the number of used bearers (valid for multi-bearer connections).

I.2.2 Subscription

For establishment of the necessary values in the CSDb the following rules shall apply:

- a basic ARI should be assigned to particular DCDL-net at the DCDL-net initialization; this should be the ARI of the terminal assigned to be the DCDL-net MASTER at this time;
- to become a member of a DCDL-net a terminal shall subscribe to the MASTER;
- the obtain access rights procedure shall be used to provide the PARK, PLI and IPUI; RFPI, as well as, the IdN and the TPUIs may be derived from this information;

- the location registration procedure shall be used to provide LAL, it may be used to assign the TPUI but it can be as well automatically extracted from the IPUI instead; if TPUI is assigned during location registration this shall overwrite any derived TPUI;
- if provision of encryption is supported after, subscription is accomplished, both terminals shall establish a DCK, shall cipher the link and all common for the DCDL-net keys shall be after that provided by the master to the applicant over this ciphered link - parameter retrieval procedure shall be used; parameter retrieval procedure may be used for assignment of a RFPI as well in this case the assigned value shall overwrite any derived value;
- parameter retrieval procedure shall be used for provision to the applicant of information for all DCDL-net members. If encryption is provided this procedure shall be performed over an encrypted link;
- the DCDL-net's CSDb may be re-established on user request; the MASTER shall perform modification of user parameters procedure to all members; this action should be performed with care as not all members may be active at this moment and the change may make them implicitly excluded from the DCDL-net.

1.2.3 Communication

A Terminal that wants to participate in a DL-net that supports distributed communication shall behave as follows:

- only members of a DCDL-net can communicate within the DCDL-net;
- to become a member, a terminal (behaving as a PT) shall request access rights from the MASTER of the DCDL-net; during the assignment of the membership access rights the applicant shall be allocated all necessary subscription data; its own data shall become part of the CSDb; shall obtain information for all members of the DCDL-net (independent of whether they are currently active or not);
- if a terminal is a member of a DCDL-net when it is powered-up, or switched to search for a DCDL-net MASTER it shall synchronize to the current MASTER (frame and multiframe numbers, PSCN, etc.) and shall constantly from this point of time on update its information as which member is currently active and may be accessed;
- shall announce itself to the MASTER as being active and thereby accessible;
- shall start listening for Paging, and, may start listening to all slots for a direct link establishment;
- if a terminal recognizes a specific Paging message that contains its TPUI and the Id of another terminal, it shall initiate direct link establishment to that terminal behaving as a FT in a Direct FT initiated link establishment procedure as specified in clause 14.2.4;
- if the User of a terminal wants to initiate a call and the desired terminal is currently active the User's terminal shall attempt a direct link establishment if this fails it shall request the MASTER to transmit a Paging to the desired terminal; if the desired terminal is not currently active the user shall not initiate this procedure.

It should be preferable that every active HyP terminal constantly listen to all frames thereby direct link establishment towards this terminal shall always succeed. However to allow some terminal to be part of the DCDL-net which due to power consumption would favour low duty cycle mode a special paging procedure need to be applied when such terminals need to be accessed being in low duty cycle mode.

There may be cases when direct communication between two members will not be possible, e.g. though the distance between each of them to the MASTER is acceptable, the distance between them does not allow communication. In such case the only possible way for communication will be via the MASTER.

NOTE: See clause I.5 for graphic representation of some of the communications scenarios.

I.3 Procedure description

I.3.1 HyP Identities

A HyP shall be assigned by the manufacturer a RFPI and an IPEI which should represent the two sides of the HyP.

The IPUI-N (equal to IPEI) shall be used by the HyP to request membership access rights from the DCDL-net MASTER; the RFPI may be used by the HyP for the DCDL-net ARI if a new DCDL-net is to be established and this HyP is been allocated by the user to be the MASTER, see clause I.3.10.2.

I.3.2 Membership Access Rights Allocation

For the Membership Access Rights Allocation procedure the normal DECT Obtain access Rights procedure shall be used, see clause 13.5.

The applicant shall provide its capabilities description indicated in a <<Terminal capability>>, a <<Set-up capability>> and an <<IWU-TO-IWU>> information elements included into the {ACCESS-RIGHTS-REQUEST} message.

Table I.1: Values for capability description used within the {ACCESS-RIGHTS-REQUEST} message

| | | | |
|-------------------------|--------------------------|--------------|--|
| <<Set-up capability>> | | | As defined in the present document or an applicable profile |
| <<Terminal capability>> | | | As defined in the present document or an applicable profile |
| <<IWU-TO-IWU>> | | | |
| | <S/R> | 1 | Transmission of message |
| | <Protocol discriminator> | 10011 | Terminal Data |
| | <Discriminator Type> | 0001 | HyP Information |
| | <Command/Action> | 0001 | Capabilities |
| | <Length of Contents>> | All | |
| | <Terminal type> | Any relevant | See clause I.4.2 |
| | <Extended capabilities> | Any | Any relevant, see clause I.4.2 |
| | <Terminal data> | RFPI | If the subscribing terminal is a HyP terminal that can play the role of a MASTER it shall provide its RFPI which shall be later use in case this terminals is assigned as a new master. The information provided shall be in the form of complete <<Fixed Id>> information elements as specified in clause 7.7.18, see clause I.4.2 as well |

With the {ACCESS-RIGHTS-ACCEPT} message the Applicant shall be assigned a DCDL-net related PARK, IPUI and PLI according to the values allocated for this DCDL-net. All other DCDL-net terminal specific values shall be extracted from these values. For the applicable rules see clause I.3.10.

Following immediately the Obtain access rights procedure a Location registration shall be performed and the terminal shall be assigned a LAL. This procedure shall indicate to the MASTER that the new member is accessible (i.e. the procedure shall be used with the meaning of an ATTACH procedure).

The procedure may be used to assign TPUI as well. If so used the TPUI shall be assigned according to the values allocated for this DCDL-net, see clause I.3.10.

If DCK (Encryption) is supported, a Store DCK procedure shall take place establishing a temporary (non DCDL-net) DCK. If this key was established for the first time in the DCDL-net life (i.e. the MASTER does not have a record for such key being ever established) this key should be used as a Static CK (SCK) for this DCDL-net for further ciphering procedures. Instead the MASTER may choose to derive a SCK based on some proprietary secure enough algorithm.

As soon as a SCK is available the MASTER shall provide it to the applicant always over a ciphered link (for encrypting this link the temporary DCK shall be used). The key shall be delivered to the applicant using the Parameter retrieval procedure described in clause I.3.4.

The DCDL-net system SCK may be recalculated on user request in order to provide sufficient system security - such procedure shall be MASTER originated.

I.3.3 Re-initialization of membership access rights

The DCDL-net membership access rights and hence the CSDB may be re-initialized at any time on user request or predefined periodic update procedure.

The MASTER should advice every member to initiate a new Membership Access Rights procedure during which the allocated DCDL-net related values can be assigned new. The FT initiated On air modification of user parameters by performing a FT initiated Parameter retrieval procedure as described in clause 13.7 and indicating in the <<Info type>> "access rights modify suggest".

I.3.4 Members Data Transfer

When membership access rights have been allocated to an applicant the MASTER shall provide the new member with information for the other members and their capabilities. The FT initiated parameter retrieval procedure shall be used as described in clause 13.7.

If encryption is provided the members data transfer procedures shall take place over a ciphered link.

The information related to every member shall include:

- the IdN of the member - all DCDL-net subscription related data for particular member may be derived from its IdN, see clause I.3.10;
- the member capability as provided in the {ACCESS-RIGHTS-REQUEST} message during the membership subscription including the <<Terminal capability>>, the <<Set-up>> capability and specific device information as provided in the <<iwu-to-iwu>>.

Table I.2: Values used within the {MM-INFO-SUGGEST} message

| Information element | Field within the information element | Standard values within the field/IE | Normative action/comment |
|----------------------|--------------------------------------|-------------------------------------|--|
| <<Info-type>> | | | |
| | <Length of Contents > | 1 | |
| | <ext> | 1 | |
| | <Parameter type> | 0100101 | Distributed communication download |
| <<Repeat indicator>> | | | Optional to use from the MASTER to provide information for number of members in one message. Mandatory to understand from the applicant/member |
| <<IWU-TO-IWU>> | | | |
| | <S/R> | 1 | Transmission of message |
| | <Protocol discriminator> | 100011 | Terminal Data |
| | <Discriminator Type> | 0001 | HyP Information |
| | <Command/Action> | 0001 | capabilities as provided by the <<iwu-to-iwu>> |
| | <Length of Contents>> | All | Determines whether the <Terminal data> field is included or not |
| | <Terminal type> | Any | Any relevant, see clause I.4.2 |
| | <Extended capabilities> | Any | Any relevant, see clause I.4.2 |
| | <Terminal Id> | All | IdN-Mean to distinguish different terminals |
| | <Terminal data> | | |
| | | <<Terminal Capability >> | The complete information element as received during subscription |
| | | <<Set-up capability>> | The complete information element as received during subscription |
| | | <<Fixed Id>> | If the subscribing terminal is a HyP terminal that can play the role of a MASTER its RFPI shall be provided and may later be used in case this terminals is assigned as a new master |

This procedure may be used to provide as well RFPI or/and TPUIs by including the corresponding information elements <<Fixed Id>> or/and <<Portable Id>> as defined in clauses 7.7.18 and 7.7.30 respectively, into the <Terminal data> field. The values assigned shall be in accordance with the rules provided in clause I.3.10 and if assigned shall overwrite any derived value.

As a fall back the Members Data Transfer procedure may be used by all members to refresh their information on the available members by requesting update from the MASTER. For these purposes the PT initiated parameter retrieval procedure shall be used.

Table I.3: Values used within the {MM-INFO-REQUEST} message

| Information element | Field within the information element | Standard values within the field/IE | Normative action/comment |
|---------------------|--------------------------------------|-------------------------------------|---|
| <<Info-type>> | | | |
| | <Length of Contents > | 00000001 | |
| | <ext> | 1 | |
| | <Parameter type> | 0100101 | Distributed Communication download |
| <<IWU-TO-IWU>> | | | This information element need to be included only if information for particular member is required as indicated in the <Terminal Id> field If it is not included the request shall be understood as request for information for all DCDL-net members |
| | <S/R> | 1 | Transmission of message |
| | <Protocol discriminator> | 0100011 | Terminal Data |
| | <Discriminator Type> | 0001 | HyP Information |
| | <Command/Action> | 0001 | capabilities |
| | <Length of Contents>> | All | Determines whether the <Terminal data> field is included or not |
| | <Terminal type> | Any | Any relevant, see clause I.4.2 |
| | <Extended capabilities> | Any | Any relevant, see clause I.4.2 |
| | <Terminal Id> | All | IdN - Mean to distinguish different terminals |

I.3.5 Presence/Absence Indication

A member shall indicate the MASTER whether it is accessible or not.

To indicate that it is accessible the attach (location registration) procedure shall be used.

To indicate that it is inaccessible the detach procedure shall be used.

I.3.6 Bandwidth management

When a member would like to establish a call to another member all DCDL-net bandwidth may be in use from other members or may not be sufficient for satisfactory grade of service.

To acquire some bandwidth the member shall request assistance from the MASTER.

On receipt of a bandwidth management assistance request, the MASTER shall broadcast a connectionless message to all involved in communications terminals requiring bandwidth reduction and providing maximum time during which the freed bearers shall not be re-targeted. All communicating terminals, providing that sufficient bandwidth is available to maintain the communication, shall reduce the number of used bearers in number equivalent to a duplex bearer (a peer of bearers 12 slots apart). The freed bearers may be re-targeted for use after the allocated duration time expires.

During this time the member which intended communication may establish the desired call using the freed slots.

To requests bandwidth management assistance from the MASTER the terminal in need shall send a {CLMS-VARIABLE} message to the MASTER utilizing the unused half of the double slot on which the System Control Bearer is transmitted according to the rules in EN 300 175-3 [3]. To reduce the time limits of transmission enforced by the MAC layer CL protocol, the usage of CLF channel is recommended.

Table I.4: Values used within the {CLMS-VARIABLE} message

| Information element | Field within the information element | Standard values within the field/IE | Normative action/comment |
|---------------------|--------------------------------------|-------------------------------------|--------------------------|
| <<Portable Id>> | | | "0" length |
| <<IWU-TO-IWU>> | | | |
| | <S/R> | 1 | Transmission of message |
| | <Protocol discriminator> | 0100011 | Terminal Data |
| | <Discriminator Type> | 0001 | HyP Information |
| | <Command/Action> | 1001 | Reduce number of bearers |
| | <Length of Contents>> | 00000001 | |
| | <Terminal type> | 00000000 | Unknown |
| | <Extended capabilities> | 00000000 | |
| | <Terminal Id> | All | IdN of the sender |

After reception of this request the MASTER shall request all or a set of involved in communication members to reduced the number of used bearers by sending a {CLMS-FIXED} message.

Table I.5: Values used within the {CLMS-FIXED} message for bandwidth change

| Information element | Field within the information element | Standard values within the field/IE | Normative action/comment |
|----------------------------|--------------------------------------|-------------------------------------|---|
| <<A>> | | 1 | Address section |
| <<CLMS header>> | | 011 | One section/Bit stream |
| <<Address>> | | Any | Lowest 16 bits of connectionless TPUI when one HyP is addressed, or, the last 16 bits of the CBI, see EN 300 175-6 [5] clause 6.3.1 when all the HyPs are addressed |
| <<Protocol Discriminator>> | <Identifier> | 0001 | Distributed Communications |
| | <Command/Action> | 1001 | Reduce number of bearers |
| <<Data>> | | Any | Time limit during which increase of number of used bearers is not allowed The time duration is binary coded (bit 1 being the least significant bit). The time duration defines time in units based on the MAC layer multiframes. Multiframes are defined in EN 300 175-3 [3]. 1 unit = 28 multiframes |

Whenever a terminal that is involved in communication receives this message, and, the received Connectionless TPUI matches one of the terminal's Connectionless TPUIs the Terminal shall try to reduce the number of bearers it is currently using.

At some cases however, reduction may not be possible - e.g. the lowest numbers of bearers necessary for maintaining the communication have been used. In such a case the terminal may decide to enforce a suspend procedure (if possible), or, need not to reduce the number of used bearers.

1.3.7 Direct Link Establishment

At any time an active member may initiate direct link establishment by a bearer establishment procedure as the bearer request may be placed in any slot.

For establishing a new link a HyP may use the PT initiated bearer establishment procedure as defined in EN 300 175-3 [3]. During the existence of a link the roles of the involved terminals shall be as allocated at the beginning of the link establishment.

A terminal should not attempt bearer establishment with a member that is not indicated as being currently active.

A bearer establishment may fail even the called terminal has been indicated as currently active, e.g. the called terminal is in low duty cycle mode. In such case the Indirect Link Establishment procedure should be used as described in clause I.3.8. In any case when a HyP is listening for direct link establishment it shall listen for request on any slot.

NOTE: It may happen that though 2 terminals have registered to the MASTER they still cannot establish direct communication, e.g. due to range problems when both are at opposite sides of the MASTER. In such case normally few failures of direct communication should lead to attempt of communication through the MASTER (internal call).

A MASTER may use paging for the purpose of establishing communication with another member of the DCDL-net.

I.3.8 Indirect Link Establishment

If a direct link establishment procedure to a particular terminal has failed the calling terminal shall request assistance from the MASTER by issuing a connectionless up-link requests providing the IdN of the targeted terminal, as well as, its own Id.

Table I.6: Values used within the {CLMS-VARIABLE} message

| Information element | Field within the information element | Standard values within the field/IE | Normative action/comment |
|---------------------|---|-------------------------------------|---|
| <<Portable Id>> | | | "0" length (see note) |
| <<IWU-TO-IWU>> | | | |
| | <S/R> | 1 | Transmission of message |
| | <Protocol discriminator> | 0100011 | Terminal Data |
| | <Discriminator Type> | 0001 | HyP Information |
| | <Command/Action> | 1010 | Page assistance |
| | <Length of Contents>> | 00000001 | |
| | <Target Terminal Id> | All | IdN of the intended for connection terminal |
| | <Initiator Terminal Id> | All | IdN of the seeking connection terminal |
| NOTE: | Inclusion of Portable Identity with length "0" is introduced in order to reduce the total length of the message. By this and adding the second Terminal Id the gain is 4 octets less length of the message compare to the case of providing the Caller Id in the portable identity information element. | | |

To reduce the time limits of transmission enforced by the MAC layer CL protocol, see EN 300 175-3 [3] the usage of CLF channel is recommended. The slot used for the transmission should be the reverse half of the DCDL-net System Control Bearer.

A terminal shall not initiate this procedure if the desired terminal is not indicated as currently available in the Active Members List distributed by the MASTER.

On receipt of the request the MASTER shall send a Connectionless message indication to the called terminal providing the IdN of the calling terminal. If the called terminal is not available the MASTER should ignore the request.

Table I.7: Values used within the {CLMS-FIXED} message one segment

| Information element | Field within the information element | Standard values within the field/IE | Normative action/comment |
|----------------------------|--------------------------------------|-------------------------------------|---|
| <<A>> | | 1 | Address section |
| <<CLMS header>> | | 011 | One section/Bit stream |
| <<Address>> | | Any | Lowest 16 bits of connectionless TPUI |
| <<Protocol Discriminator>> | <Identifier> | 0001 | Distributed Communications |
| | <Command/Action> | 1011 | Direct link establishment |
| <<Data>> | | Any | IdN of the terminal that requested the assistance - the receiver shall use this to identify to which terminal to initiate a direct link establishment |

The called terminal should initiate direct link establishment to the calling terminal. As it may not be for whatever reason capable of doing this, the initiating terminal should not wait for ever. It may repeat the procedure maximum 3 times and in case of all 3 attempts have failed the user should be informed for the call attempt failure.

1.3.9 MASTER management

1.3.9.1 MASTER assign

For setting up a DCDL-net a MASTER terminal is needed which shall transmit a System Control Bearer. The User shall ensure that a MASTER is available which MASTER shall start transmission of such a bearer on User request for setting-up a DCDL-net. The invocation of MASTER assign procedure is not specified and is left to the implementers assuming that User intervention shall be always required.

If a DCDL-net has been already set-up, however, during a reasonable time a member of a DCDL-net terminal cannot find the DCDL-net System Control Bearer proper indication shall be provided to the User of the terminal.

The DCDL-net System Control bearer shall be a connectionless bearer due to the fact that the DCDL-net system information it transmitted in connectionless messages.

If a member of DCDL-net has been assigned as MASTER this shall be responsible for the transmission of the Connectionless DCDL-net system bearer. This bearer shall be present if at least one member of a DCDL-net is active.

Establishment and maintenance of this bearer shall be done in accordance to the requirements of the EN 300 175-3 [3].

1.3.9.2 MASTER Change

If a MASTER is to leave the DCDL-net it should allocate any of the currently active members as its successor. Alternatively, complete re-initialization of the DCDL-net may be done, i.e. desubscribing and subscribing to a new MASTER.

For the MASTER assignment of new MASTER procedure, a connectionless message shall be sent.

Table I.8: Values used within the {CLMS-FIXED} message one segment

| Information element | Field within the information element | Standard values within the field/IE | Normative action/comment |
|----------------------------|--------------------------------------|-------------------------------------|--|
| <<A>> | | 1 | Address section |
| <<CLMS header>> | | 011 | One section/Bit stream |
| <<Address>> | | Any | Lowest 16 bits of connectionless TPUI |
| <<Protocol Discriminator>> | <Identifier> | 0001 | Distributed Communications |
| | <Command/Action> | 1100 | master change |
| <<Data>> | | Any | IdN of the terminal that is assign as new MASTER - the receiver shall use this to identify to which RFPI it needs to lock and shall modify the DCDL-net System ARI |

The current MASTER shall start a timer and shall monitor the air for a new System Control Bearer establishment - a value of 4 seconds is recommended. When such is found the current MASTER shall inform all active members for the change of the bearer position and shall close its activities-"connectionless or dummy bearer position" shall be used.

If during this time no new System bearer is found the MASTER shall request another active member to undertake its responsibilities.

1.3.9.3 DCDL-net System bearer management

The System bearer shall be a connectionless bearer as defined in EN 300 175-3 [3].

In addition to the information normally transmitted when no additional dummy bearer is available, the MASTER shall transmit specific DCDL-net members related information in regular intervals - it is recommended that the first segment of this message occurs every 4 seconds.

Table I.9: Values used within the {CLMS-FIXED} message 1st segment

| Information element | Field within the information element | Standard values within the field/IE | Normative action/comment |
|----------------------------|--------------------------------------|-------------------------------------|--|
| <<A>> | | 1 | Address section |
| <<CLMS header>> | | 100 | Multiple sections/Bit stream |
| <<Address>> | | Any | Lowest 16 bits of connectionless TPUI |
| <<Protocol Discriminator>> | <Identifier> | 0001 | Distributed Communications |
| | <Command/Action> | 1101 | active members list |
| <<Length Identifier>> | | Any | Indicates implicitly the number of data sections to follow |

Table I.10: Values used within the {CLMS-FIXED} message 2nd segment

| Information element | Field within the information element | Standard values within the field/IE | Normative action/comment |
|---------------------|--------------------------------------|-------------------------------------|----------------------------------|
| <<A>> | | 0 | Data section |
| <<CLMS header>> | | 000 | Data section number - 0 (1st) |
| <<DATA/Fill>> | | IN1 | IdN number of an active terminal |
| | | IN2/Fill | IdN number of an active terminal |
| | | IN3/Fill | IdN number of an active terminal |
| | | IN4/Fill | IdN number of an active terminal |

Table I.11: Values used within the {CLMS-FIXED} message k segment

| Information element | Field within the information element | Standard values within the field/IE | Normative action/comment |
|---------------------|--------------------------------------|-------------------------------------|----------------------------------|
| <<A>> | | 0 | Data section |
| <<CLMS header>> | | k | Data segment (k+1) |
| <<DATA/Fill>> | | IN4k+1 | IdN number of an active terminal |
| | | IN4k+2/Fill | IdN number of an active terminal |
| | | IN4k+3/Fill | IdN number of an active terminal |
| | | IN4k+4/Fill | IdN number of an active terminal |

1.3.10 Common Subscription Database management

1.3.10.1 IdN

Each member of a DCDL-net shall be assigned an Identity Number (IdN) which shall be of 8 bits length thereby providing 255 distinguishable numbers for 255 possible members of a DCDL-net.

1.3.10.2 RFPI, PARK and PLI

A DCDL-net is recognized by an ARI, a Common PARK and number of Members specific RFPIs.

For allocation of DCDL-net Common PARK and Members specific RFPIs, a DCDL-net System ARI shall be used. This shall be a unique ARI of this DCDL-net which shall be broadcasted by the MASTER and used for locking and obtaining system information. The ARI of the MASTER as assigned during manufacturing shall be used to guarantee its uniqueness.

For a given DCDL-net ARI the following rules in accordance to EN 300 175-6 [5] shall apply:

- the DCDL-net PARK should equal this ARI;
- for one cell systems or systems in which inter-cell handover is not foreseen the members specific RFPIs shall be based on an ARI that equals the DCDL-net ARI, the E bit should be set to 0 and the RPN shall equal the member's IdN (this means that if the RPN in use is only of 3 bits length the assignment of the IdN shall reflect this limitation and the unused MSB shall be set to 0);
- for multi-cell systems (determined by multi RFPs MASTER) with inter-cell handover care shall be taken during allocation providing that the MASTERS RFPs are assigned with IdNs allowing inter-cell handover and being still unique (e.g. not repeating a member IdN). See as well clause I.3.11.

NOTE: For further extension of the present document assignment of a per Member specific DCDL-net Cell Locator may be foreseen to allow Members to be multi-cell systems as well.

PLI should be assign to cover the PARI and to exclude the RPN.

I.3.10.3 IPUI

For the member specific IPUIs the IPUI type O as specified in EN 300 175-6 [5], clause 6.2.3 should be used.

Different Numbers shall be assigned to every member of the DCDL-net, these numbers shall be used to identify every particular member and provide means to derive all subscription related data.

For the assignment of these numbers the following rule apply: the 8 least significant bits shall be the IdN number and they shall be unique within the DCDL-net. The rest of the bits shall be set to "0".

I.3.10.4 TPUI and LAL

The LAL assigned during Location registration should be the same throughout the entire DCDL-net.

The individual assigned TPUI shall equal the IdN of the particular terminal with most significant bits following the rules of EN 300 175-6 [5] for individual assigned TPUI.

To perform all connectionless operations the MASTER shall assign Connectionless TPUIs to each member that equal the member's IdN with most significant bits following the rules of EN 300 175-6 [5].

I.3.10.5 Keys

A common AC shall be allocated to the DCDL-net by the user and shall be used during subscription and throughout the intra DCDL-net communication whenever authentication between two members is performed.

If encryption is supported a Static CK shall be allocated to the DCDL-net during the first subscription. Establishment of this key should be based on a Store DCK procedure performed using the AC, other proprietary establishment of this key may be applied by the MASTER as well. The resulted key shall be the SCK used by the DCDL-net for further communication.

I.3.11 Handover issues

The MASTER may decide to change the position of the System Control Bearer. The new position shall be announced. As the new position may overlap with a slot on which there is ongoing communication between two members of the DCDL-net, as soon as these members receive the new System Control Bearer slot position they should attempt to move their communication to another slot by performing bearer replacement or a bearer handover for the bearer(s) which will overlap.

I.4 Elements of Messages/Information Elements

This clause specifies in details the complete contents of the messages/information elements used by the Distributed Communication Protocol which are based on the general information elements description as specified earlier in clauses 7.7 and 8.3 and add specific Distributed Communication content.

I.4.1 CLMS-FIXED

Table I.12: Values used within the {CLMS-FIXED} message one segment

| Information element | Field within the information element | Standard values within the field/IE | Normative action/comment |
|----------------------------|--------------------------------------|-------------------------------------|--|
| <<A>> | | 1 | Address section |
| <<CLMS header>> | | 011 | One section/Bit stream |
| <<Address>> | | Any | Lowest 16 bits of connectionless TPUI |
| <<Protocol Discriminator>> | <Identifier> | 001 | Distributed Communications |
| | <Command/Action> | 1001 | Reduce number of bearers |
| | | 1010 | Page assistance |
| | | 1011 | Direct link establishment |
| | | 1100 | Master change |
| | | 1101 | Active members list |
| <<Data>> | | Any | Contents depends on the <Command/Action> field as described in relevant clause in the present document |

For constructing a multi-section {CLMS-FIXED} message the rules as defined in clause 8.3 apply.

I.4.2 IWU-TO-IWU

Table I.13: Values used within the <<IWU-TO-IWU>> Information element for <Command/action> set to "capabilities"

| | | | |
|----------------|--------------------------|----------|---|
| <<IWU-TO-IWU>> | | | Preceding octets as defined in clause 7.7.23 |
| | <ext3> | 1 | |
| | <S/R> | 1/0 | Transmission of message |
| | <Protocol discriminator> | 100011 | Terminal Data |
| | <Discriminator Type> | 0001 | HyP Information |
| | | 0000 | PP Information |
| | | 0010 | FP Information |
| | <Command/Action> | 0001 | Capabilities |
| | <Length of Contents>> | All | |
| | <Terminal type> | 00000000 | Unknown |
| | | 00000001 | PC |
| | | 00000010 | Printer |
| | | 00000011 | Scanner |
| | | 00000100 | Digital Camera |
| | | 00000101 | Modem |
| | | 00000110 | Palmheld |
| | | 00001000 | Voice |
| | | 00001001 | External line connector (e.g. an ISDN base) |
| | | *** | More to be defined |
| | <Extended capability> | | A bit mask |
| | | xxxxxxx1 | The devise is able to perform internal calls |
| | | xxxxxx1x | The devise is able to perform more than on simultaneous calls |
| | | xxxxx1xx | The devise provides access to external line |
| | <Terminal Id> | All | IdN of the concerned terminal - depends on the values indicated into the <Discriminator type> and the <Command/Action> |
| | <Terminal data> | | The information provided shall be in the form of complete information elements as specified in clause 7.7, e.g. <<Terminal capability>>, <<Key>>, <<Portable Identity>>, <<Fixed Identity>>, etc. |

Table I.14: Values used within the <<IWU-TO-IWU>> Information element for <Command/action> set to "Page Assistance"

| | | | |
|----------------|--------------------------|----------|---|
| <<IWU-TO-IWU>> | | | |
| | <S/R> | 1 | Transmission of message |
| | <Protocol discriminator> | 0100011 | Terminal Data |
| | <Discriminator Type> | 0001 | HyP Information |
| | | 0000 | PP Information |
| | <Command/Action> | 1010 | Page assistance |
| | <Length of Contents>> | 00000001 | |
| | <Target Terminal Id> | All | IdN of the intended for connection terminal |
| | <Initiator Terminal Id> | All | IdN of the seeking connection terminal |

I.4.3 Info-type

Table I.15: Values used within the <<Info type>> Information element

| | | | |
|---------------|-----------------------|----------|------------------------------------|
| <<Info-type>> | | | |
| | <Length of Contents > | 00000001 | |
| | <ext> | 1 | |
| | <Parameter type> | 0100101 | Distributed Communication download |

I.4.4 CLMS-VARIABLE

The {CLMS-VARIABLE} shall be constructed in accordance to the requirements of clause 6.3.5.1. The mandatory information elements are indicated in table I.16.

Table I.16: Values used within the {CLMS-VARIABLE} message

| Information element | Field within the information element | Standard values within the field/IE | Normative action/comment |
|---------------------|--------------------------------------|-------------------------------------|--|
| <<Portable Id>> | | | contents as specified in the related procedure |
| <<IWU-TO-IWU>> | | | contents as specified in the related procedure |

I.5 Examples

I.5.1 General

To ease understanding this clause provides some examples.

For these examples the following basic user configuration is used:

- there are two PCs - PC_1 and PC_2 which are connected to a HyP terminals each;
- there is a Printer connected to a HyP terminal, here called "Print";
- there is a Scanner connected to a HyP terminal, here called "Scan";
- there is a Digital Camcorder connected to a HyP terminal, here called "D-Cam";
- there is a GAP voice Portable, here called "Handy";
- there is a Base Station called in here "Switch" (a HyP terminal from type External Line Connector) connected to an external line;
- there is Palmheld computer (organizer, etc.) connected to a HyP terminal, here called "PalmH".

A DCDL-net has been set-up comprising all the eight DECT terminals. The Switch has been assigned as the MASTER of this DCDL-net. Consequently the Switch is transmitting the DCDL-net System Control Bearer. When powered-on all terminals (except the Switch) locked to the MASTER, synchronize, obtain all information relevant to this DCDL-net (e.g. which are the present members, etc.) and are able to set-up connection directly to desired member of the DCDL-net.

1.5.2 Example 1

In this example all except the Handy and the Switch (MASTER) terminals are switched-off. The Handy is performing a voice session through the Switch and the External network to a far-end terminal.

Using the existing spectrum of 240 slots:

- the Master is transmitting the System Control Bearer occupying a connectionless bearer - 2 slots;
- the session between the Handy and the Switch is occupying 2 slots (a duplex channel).

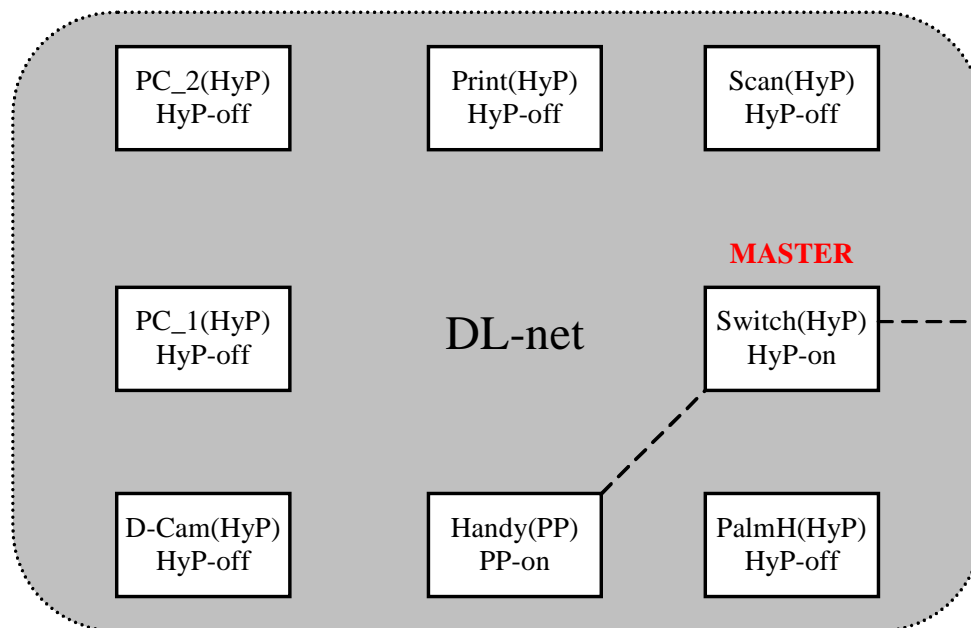


Figure 1.1: DL-net - only voice communication enabled - Handy locked to Switch

1.5.3 Example 2

In this scenario the Handy is continuing its Voice session, and, all the rest of the terminals have been switched-on.

Using the existing spectrum of 240 slots:

- the Master is transmitting the System Control Bearer occupying a connectionless bearer - 2 slots;
- the session between the Handy and the Switch is occupying 2 slots (a duplex channel);
- PC_2 is printing having a direct communication with the Printer using let us say 1 duplex and 2 simplex bearers (4 slots);
- the D-Cam is uploading images to PC_1 using another 4 slots (1 duplex and 2 simplex bearers).

All in total 12 slots are in use. For comparison, if all the links had to be performed through the Switch (a FP) 20 slots should have been in used.

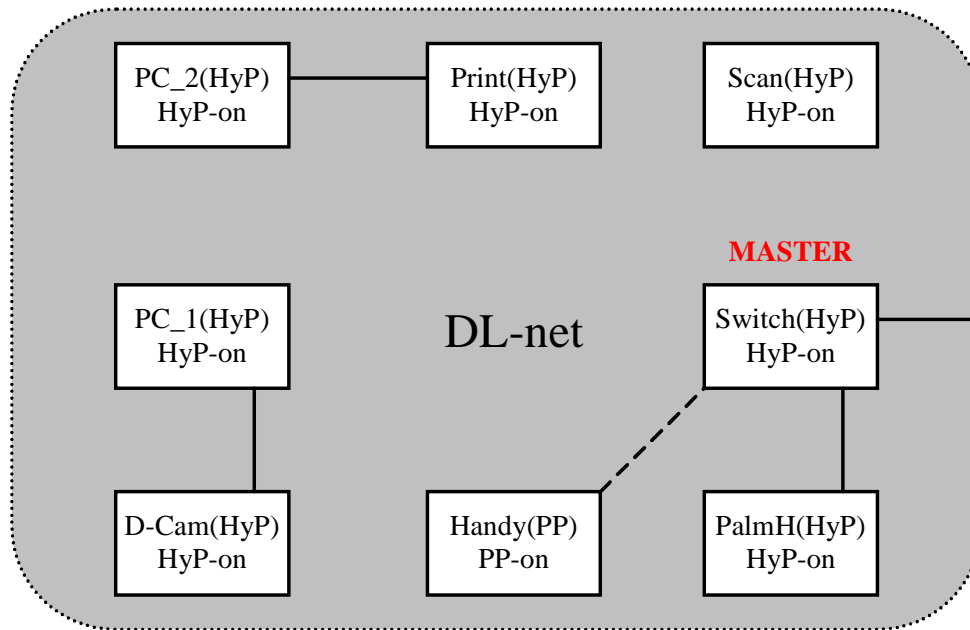


Figure I.2: DL-net communication - PC_2 prints; D-CAM uploads to PC_1; Handy locked to Switch; PalmH gets mails; Scan inactive

1.5.4 Example 3

In this scenario the Handy is continuing its Voice session, PC_2 is still printing, and, all the rest of the terminals have been switched-on.

PC_1 has established a direct link to the Print as well.

Using the existing spectrum of 240 slots:

- the Master is transmitting the System Control Bearer occupying a connectionless bearer - 2 slots;
- the session between the Handy and the Switch is occupying 2 slots (a duplex channel);
- a session between the PalmH and the Switch is occupying 2 slots (e.g. Internet session in parallel to a voice one for Switch connected to ISDN);
- PC_2 is printing having a direct communication with the Printer using let us say 1 duplex and 2 simplex bearers (4 slots);
- the PC_1 is printing using another 4 slots (1 duplex plus 2 simplex bearers);
- Print, as well as, Switch are handling two parallel links.

All in total 14 slots are in use. For comparison, if all the links had to be performed through the Switch (a FP) 22 slots should have been in used.

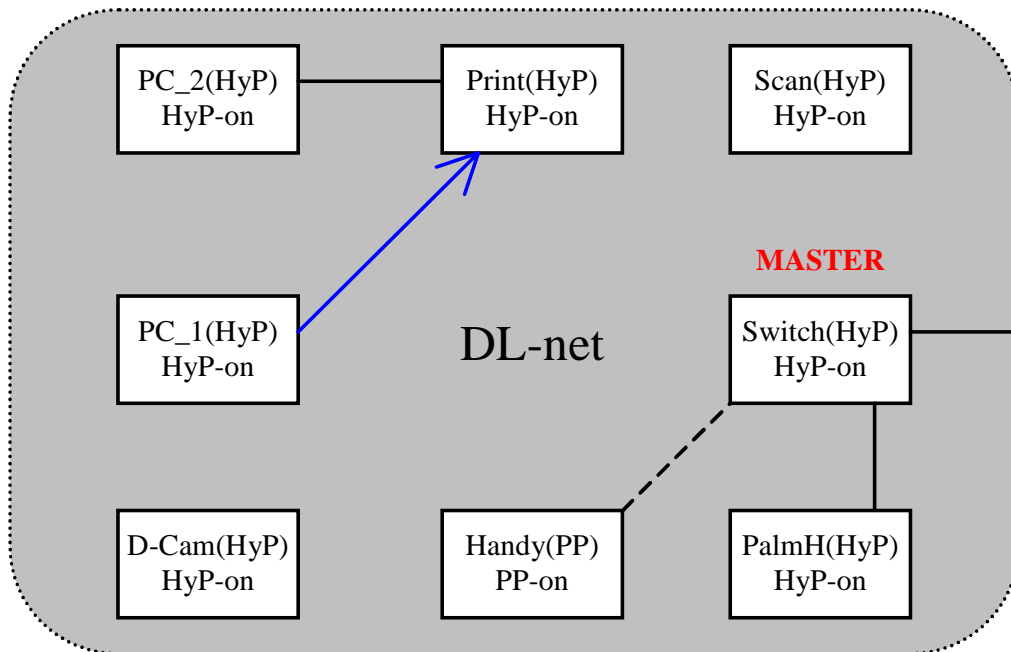


Figure I.3: DL-net communication - PC_2 prints; PC_1 prints (direct link establishment); D-CAM inactive; Handy locked to Switch; PalmH gets mails; Scan inactive

1.5.5 Example 4

In this scenario the Handy is continuing its Voice session, PC_2 is still printing and all the rest of the terminals have been switched-on.

In this special example PC_1 has not been able to successfully perform the direct link establishment procedure to Print (e.g. after being engaged with PC_2 Print does not listen to other bearer establishment attempts).

PC_1 has requested assistance from the MASTER in achieving the communication to the Print. The MASTER has send a CL message to the Print requesting it to communicate to PC_1. Print has not miss it as it is required to listen to the System Control Bearer on which the indication was transmitted.

Finally, Print has establish link to PC_1 and PC_1 is able to print.

Using the existing spectrum of 240 slots:

- the Master is transmitting the System Control Bearer occupying a connectionless bearer - 2 slots;
- the session between the Handy and the Switch is occupying 2 slots (a duplex channel);
- a session between the PalmH and the Switch is occupying 2 slots (e.g. Internet session in parallel to a voice one for Switch connected to ISDN);
- PC_2 is printing having a direct communication with the Printer using let us say 1 duplex and 2 simplex bearers (4 slots);
- the PC_1 is printing using another 15 slots (1 duplex plus 13 simplex);
- Print as well as Switch are handling two parallel links.

All in total 25 slots are in use. In order to work this scenario requires from the involved terminals usage of some same slots on different frequencies which will be possible depending on the location of the terminals.

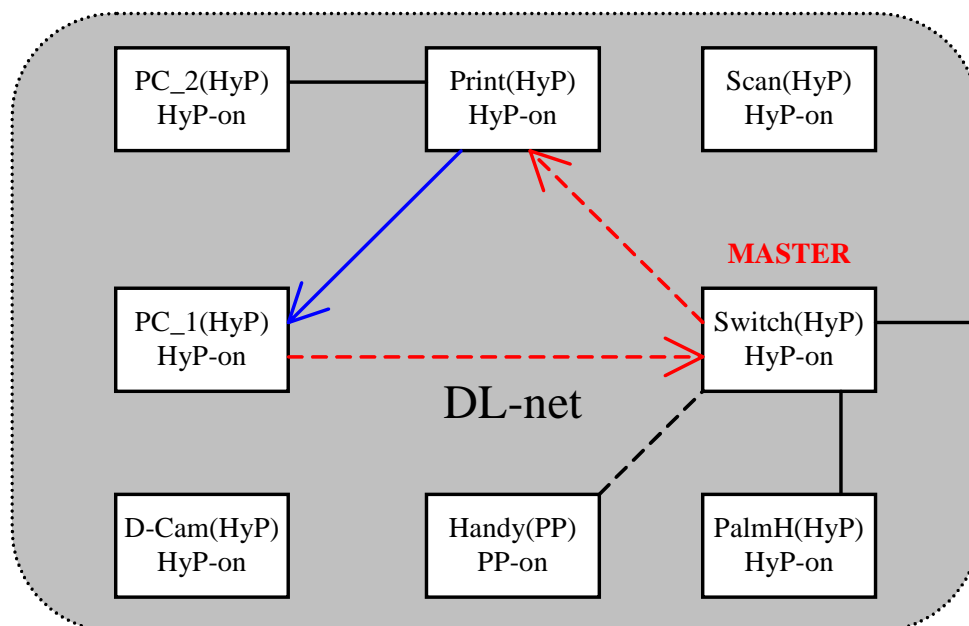


Figure I.4: DL-net communication - PC_2 prints; PC_1 prints (Indirect link establishment); D-CAM inactive; Handy locked to Switch; PalmH gets mails; Scan inactive

I.6 Usage of PPs or FPs in DCDL-net

I.6.1 General

Apart from HyPs terminals, normal PPs and FPs can become members of a DCDL-net.

Such terminals need to support some of the procedures described earlier in the present document. This clause describes the necessary requirements.

I.6.2 Requirements to FPs

I.6.2.1 General

A FP can be a member of a DCDL-net only in the role of a MASTER. To operate as MASTER a FP shall support the procedures as indicated in table I.17.

Table I.17: Support of DCDL-net procedures for a member of type FP

| Procedure | Support | Comments |
|--|---|---|
| Membership Access Rights Allocation | YES | The MASTER related issues |
| Re-initialization of membership access rights | YES | The MASTER related issues |
| Members Data Transfer | YES | The MASTER related issues |
| Presence/Absence Indication | YES | To understand and handle initiation of this |
| Bandwidth management | YES | The MASTER related issues |
| Direct Link Establishment | OPTIONAL to initiate MANDATORY to response | The MASTER related issues |
| Indirect Link Establishment | YES | The MASTER related issues |
| MASTER management - MASTER assign | YES | The MASTER related issues |
| MASTER management - MASTER Change | YES | The MASTER related issues |
| MASTER management - DCDL-net System bearer management | YES | The MASTER related issues |
| Common Subscription Database management - RFPI, PARK and PLI | YES | The MASTER related issues |
| Common Subscription Database management - IPUI | YES | The MASTER related issues |
| Common Subscription Database management - TPUI and LAL | YES | The MASTER related issues |
| Common Subscription Database management - Keys | YES | The MASTER related issues |

Modification to this procedure wherever required are described in the following clauses.

I.6.2.2 Members Data Transfer

The requirements as in clause I.3.4 shall apply with the following modification.

A FP can be distinguish from a HyP by the indication in the <Discriminator type>.

Table I.18: Discriminator type for PP

| | | | |
|----------------|----------------------|------|----------------|
| <<IWU-TO-IWU>> | | | |
| | <Discriminator Type> | 0010 | FP Information |

I.6.2.3 Direct Link Establishment

The requirements as in clause I.3.7 shall apply.

I.6.3 Requirements to PPs

I.6.3.1 General

A PP can be a member of a DCDL-net but not in the role of a MASTER. To operate as a member a PP shall support the procedures as indicated in table I.19.

Table I.19: Support of DCDL-net procedures for a member of type PP

| Procedure | Support | Comments |
|--|------------------------------------|---|
| Membership Access Rights Allocation | YES | The NON MASTER related issues |
| Re-initialization of membership access rights | YES | The NON MASTER related issues |
| Members Data Transfer | YES | The NON MASTER related issues |
| Presence/Absence Indication | YES | To be able to announce presence/absence |
| Bandwidth management | YES | The NON MASTER related issues |
| Direct Link Establishment | MANDATORY to initiate and response | The NON MASTER related issues |
| Indirect Link Establishment | YES | The NON MASTER related issues |
| MASTER management - MASTER assign | YES | The NON MASTER related issues, e.g. understanding and reacting properly to the MASTER behaviour |
| MASTER management - MASTER Change | YES | The NON MASTER related issues, e.g. understanding and reacting properly to the MASTER behaviour |
| MASTER management - DCDL-net System bearer management | YES | The NON MASTER related issues, e.g. understanding and reacting properly to the MASTER behaviour |
| Common Subscription Database management - RFPI, PARK and PLI | YES | The NON MASTER related issues, e.g. to manage the assignment/usage of related identities |
| Common Subscription Database management - IPU1 | YES | The NON MASTER related issues, e.g. to manage the assignment/usage of related identities |
| Common Subscription Database management - TPUI and LAL | YES | The NON MASTER related issues, e.g. to manage the assignment/usage of related identities |
| Common Subscription Database management - Keys | YES | The NON MASTER related issues, e.g. to manage the assignment/usage of related keys |

Modification to this procedure wherever required are described in the following clauses.

I.6.3.2 Membership Access Rights Allocation

The requirements as in clause I.3.2 shall apply with the following modification.

The PP shall indicate that this is a PP.

Table I.20: Values for capability description used within the {ACCESS-RIGHTS-REQUEST} message

| | | | |
|----------------|----------------------|------|----------------|
| <<IWU-TO-IWU>> | | | |
| | <Discriminator Type> | 0000 | PP Information |

I.6.3.3 Members Data Transfer

The requirements as in clause I.3.4 shall apply with the following modification.

A PP can be distinguish from a HyP by the indication in the <Discriminator type>:

Table I.21: Discriminator type for PP

| | | | |
|----------------|----------------------|------|----------------|
| <<IWU-TO-IWU>> | | | |
| | <Discriminator Type> | 0000 | PP Information |

I.6.3.4 Direct Link Establishment

The requirements as in clause I.3.7 shall apply with the following modification.

Normal PPs cannot initiate direct communication to another DCDL-net member. Such PTs may initiate call to another member either via the MASTER (internal call) or if they support the procedure for requesting assistance from the MASTER this can be used to indicate to the relevant terminal to start direct link to this PT.

I.6.3.5 Indirect Link Establishment

The requirements as in clause I.3.8 shall apply with the following modification.

A PP can be distinguish from a HyP by the indication in the <Discriminator type>.

Table I.22: Discriminator type for PP

| | | | |
|----------------|----------------------|------|----------------|
| <<IWU-TO-IWU>> | | | |
| | <Discriminator Type> | 0000 | PP Information |

Annex J (normative): Scrolling Behaviour

Scrolling Behaviour Types 1 and 2

When the amount of stored display data exceeds the size of the physical display, the display shall be able to show sections (windows) of the stored data. If the window starts at character x in the stored display, the x^{th} character shall appear at the home position of the display and the $(np - 1)$ subsequent characters shall be mapped, line by line, sequentially to the rest of the display (where n is the number of lines in the display and p is the number of characters per line). The allowed window positions determine whether the display scrolls by character, by line or by page.

If the display has only one row and supports scrolling behaviour type = 1 then it shall scroll by character.

If the display has more than one row and supports scrolling behaviour type = 1 then it shall scroll by line.

If the display has only one row and supports scrolling behaviour type = 2 then it shall scroll by page.

There is no distinction between line and page scrolling in a single line display. If the display has more than one row and supports display behaviour type = 2 then it shall scroll by page.

The scrolling behaviour is summarized in table J.1.

Table J.1: Scrolling behaviour types

| | Scrolling behaviour type = 1 | Scrolling behaviour type = 2 |
|---------------------|------------------------------|------------------------------|
| Single line display | scroll by character | scroll by page (see above) |
| Multi line display | scroll by line | scroll by page |

A PT display which scrolls may set its window origin as shown in table J.2. The first stored character is character 1.

Table J.2: PT display window origin settings

| Scroll type | Character | Line | Page |
|---------------|-----------|--------|---------|
| Window origin | 1 | 1 | 1 |
| | 2 | $p+1$ | $np+1$ |
| | 3 | $2p+1$ | $2np+1$ |
| | . | . | . |
| | . | . | . |
| | etc. | etc. | etc. |

where n is the number of lines in the display and p is the number of characters per line.

The effect of changing the display is to over-write existing characters. It is not possible to insert characters.

The action of the <<MULTI-DISPLAY>> information element 0CH shall be to clear the entire stored display and reset the display window and cursor to the first stored character.

The action of the <<MULTI-DISPLAY>> information element 02H shall be to reset the display window and cursor to the first stored character.

The action of the <<MULTI-DISPLAY>> information element 03H shall be to move the cursor to the end of the current display window. Any further displayable characters shall cause the display to scroll.

When a line is filled, further characters will be displayed at the beginning of a new line. A CR/LF sequence (<<MULTI-DISPLAY>> information element 0AH, 0DH) should not be sent unless a line is terminated before the end of the display line.

The cursor (indicating where the next displayable character will appear) should normally be within the visible window. However, when the display is filled, the displayed characters shall remain until a further display character is received, i.e. the cursor may not be within the visible window. When another display character is received, the PT shall move the window origin by one character, line or page as appropriate. (The character insert position within the stored display does not change.) The newly received characters are then displayed.

If the cursor is moved backwards or upwards through the display, the display shall scroll up (by character, line or page) when the cursor moves off the top of the screen. In upwards scrolling the cursor shall remain visible within the display window.

Manufacturers may incorporate automatic techniques to change display windows or may provide key sequences to allow the user to move the display windows. In either case this action shall not affect the position in the stored display at which further characters are stored and the PT shall remember the window origin prior to the action. Immediately following the receipt of a further display character, the PT shall reset its display to the window position prior to the action and the display character shall be carried out as normal.

When the FT sends messages to the display, it should ensure that the capacity of the stored display is not exceeded. If the end of the stored display is reached, further characters shall be displayed but the subsequent scrolling behaviour of the display may be unpredictable.

Annex K (informative): Bibliography

ETSI I-ETS 300 022: "Digital cellular telecommunications system (Phase 1) (GSM); Mobile radio interface; Layer 3 specification".

ITU-T Recommendation E.163: "Numbering plan for the international telephone service".

ITU-T Recommendation E.164: "The international public telecommunication numbering plan".

ITU-T Recommendation G.711: "Pulse code modulation (PCM) of voice frequencies".

ITU-T Recommendation G.721: "32 kbit/s adaptive differential pulse code modulation (ADPCM)".

ITU-T Recommendation H.221: "Frame structure for a 64 to 1920 kbit/s channel in audiovisual teleservices".

ITU-T Recommendation H.242: "System for establishing communication between audiovisual terminals using digital channels up to 2 Mbit/s".

ITU-T Recommendation H.261: "Video codec for audiovisual services at p x 64 kbit/s".

ITU-T Recommendation I.441: "ISDN user-network interface - Data link layer specification".

ITU-T Recommendation I.460: "Multiplexing, rate adaption and support of existing interfaces".

ITU-T Recommendation Q.921: "ISDN user-network interface - Data link layer specification".

ITU-T Recommendation Q.931: "ISDN user-network interface layer 3 specification for basic call control".

ITU-T Series V Recommendations: "Data communication over the telephone network".

ITU-T Recommendation V.6: "Standardization of data signalling rates for synchronous data transmission on leased telephone-type circuits".

ITU-T Recommendation V.21: "300 bits per second duplex modem standardized for use in the general switched telephone network".

ITU-T Recommendation V.22: "1200 bits per second duplex modem standardized for use in the general switched telephone network and on point-to-point 2-wire leased telephone-type circuits".

ITU-T Recommendation V.22bis: "2400 bits per second duplex modem using the frequency division technique standardized for use on the general switched telephone network and on point-to-point 2-wire leased telephone-type circuits".

ITU-T Recommendation V.23: "600/1200-baud modem standardized for use in the general switched telephone network".

ITU-T Recommendation V.26: "2400 bits per second modem standardized for use on 4-wire leased telephone-type circuits".

ITU-T Recommendation V.26bis: "2400/1200 bits per second modem standardized for use in the general switched telephone network".

ITU-T Recommendation V.26ter: "2400 bits per second duplex modem using the echo cancellation technique standardized for use on the general switched telephone network and on point-to-point 2-wire leased telephone-type circuits".

ITU-T Recommendation V.27: "4800 bits per second modem with manual equalizer standardized for use on leased telephone-type circuits".

ITU-T Recommendation V.27bis: "4800/2400 bits per second modem with automatic equalizer standardized for use on leased telephone-type circuits".

ITU-T Recommendation V.27ter: "4800/2400 bits per second modem standardized for use in the general switched telephone network".

ITU-T Recommendation V.29: "9600 bits per second modem standardized for use on point-to-point 4-wire leased telephone-type circuits".

ITU-T Recommendation V.32: "A family of 2-wire, duplex modems operating at data signalling rates of up to 9600 bit/s for use on the general switched telephone network and on leased telephone-type circuits".

ITU-T Recommendation V.35: "Data transmission at 48 kilobits per second using 60-108 kHz group band circuits".

ITU-T Series X Recommendations: "Data networks and open system communication".

ITU-T Recommendation X.121: "International numbering plan for public data networks".

ITU-T Recommendation X.28: "DTE/DCE interface for a start-stop mode Data Terminal Equipment accessing the Packet Assembly/Disassembly facility (PAD) in a public data network situated in the same country".

ITU-T Recommendation X.29: "Procedures for the exchange of control information and user data between a Packet Assembly/Disassembly (PAD) facility and a packet mode DTE or another PAD".

ITU-T Recommendation X.31: "Support of packet mode terminal equipment by an ISDN".

ITU-T Recommendation X.200: "Information technology - Open Systems Interconnection - Basic Reference Model: The basic model".

ITU-T Recommendation X.210: "Information technology - Open systems interconnection - Basic Reference Model: Conventions for the definition of OSI services".

ITU-T Recommendation T.50: "International Reference Alphabet (IRA) (Formerly International Alphabet No. 5 or IA5) - Information technology - 7-bit coded character set for information interchange".

ETSI I-ETS 300 022: " Digital cellular telecommunications system (Phase 1) (GSM); Mobile radio interface; Layer 3 specification".

IEEE 802.3: "IEEE 802.3 Systems Networking Guide: How to Optimize Your Network Using the ISO/IEC 8802-3 Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Standard".

Annex L (informative): Change history

The following table presents main changes from a published version to the next version (published or to be published).

| Subject/Comment | Old | New |
|--|------------|------------|
| The enhancement of the DECT base standard to support higher data rates includes the 16 QAM/64 QAM modulation option and the Channel Coding based on the Turbo Code Principle. | 1.6.1 | 1.7.1 |
| The enhancement of the DECT base standard to support DECT Broadband service and backwards compatible changes for support of DECT access to IP networks (TS 102 265 v010101) and some minor editorial improvements. | 1.7.1 | 1.8.1 |

History

| Document history | | |
|-------------------------|----------------|---|
| Edition 1 | October 1992 | Publication as ETS 300 175-5 (Historical) |
| Edition 2 | September 1996 | Publication as ETS 300 175-5 (Historical) |
| Edition 3 | December 1997 | Publication as ETS 300 175-5 (Historical) |
| V1.4.2 | June 1999 | Publication |
| V1.5.1 | February 2001 | Publication |
| V1.6.1 | February 2002 | Publication |
| V1.7.1 | July 2003 | Publication |
| V1.8.0 | July 2004 | One-step Approval Procedure OAP 20041112: 2004-07-14 to 2004-11-12 |