

Dynamic synchronous Transfer Mode (DTM); Part 13: System description of sub-rate DTM



Reference

DES/TISPAN-02004-DTM

Keywords

DTM, rate**ETSI**

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2005.
All rights reserved.

DECTTM, **PLUGTESTSTM** and **UMTSTM** are Trade Marks of ETSI registered for the benefit of its Members.
TIPHONTM and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPPTM is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Contents

| | |
|--|----|
| Intellectual Property Rights | 4 |
| Foreword..... | 4 |
| Introduction | 5 |
| 1 Scope | 6 |
| 2 References | 6 |
| 3 Definitions and abbreviations..... | 6 |
| 3.1 Definitions | 6 |
| 3.2 Abbreviations | 7 |
| 4 Overview | 7 |
| 5 Time Slot sub-rate sub-layer (TSs) | 7 |
| 5.1 Access point information..... | 8 |
| 5.1.1 Characteristic Information | 8 |
| 5.1.2 Adapted Information..... | 8 |
| 5.1.3 Management Information | 8 |
| 5.1.4 Timing Information..... | 9 |
| 5.2 Connection function (TSs_C)..... | 9 |
| 5.2.1 Drop switching..... | 9 |
| 5.2.2 Space switching | 9 |
| 5.2.3 Sub-rate Time Slot Transport switching | 9 |
| 5.3 Trail Termination functions (TSs_TT)..... | 9 |
| 5.3.1 Sub-rate Time Slot Trail Termination function (TSs_TT)..... | 9 |
| 5.3.1.1 Sub-rate Time Slot Trail Termination Source function (TSs_TT_So)..... | 10 |
| 5.3.1.2 Sub-rate Time Slot Trail Termination Sink function (TSs_TT_Sk)..... | 11 |
| 5.4 Adaptation functions | 12 |
| 5.4.1 Time Slot to sub-rate Time Slot Adaptation function (TS/TSs_A)..... | 12 |
| 5.4.1.1 Time Slot to sub-rate Time Slot Adaptation Source function (TS/TSs_A_So)..... | 12 |
| 5.4.1.2 Time Slot to sub-rate Time Slot Adaptation Sink function (TS/TSs_A_Sk) | 13 |
| 5.4.2 Sub-rate Time Slot to Channel 1 Adaptation function (TSs/CH1_A)..... | 14 |
| 5.4.2.1 Sub-rate Time Slot to Channel 1 Adaptation Source function (TSs/CH1_A_So)..... | 14 |
| 5.4.2.2 Sub-rate Time Slot to Channel 1 Adaptation Sink function (TSs/CH1_A_Sk) | 15 |
| 6 Sub-rate Time Slot mapping..... | 16 |
| History | 18 |

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This ETSI Standard (ES) has been produced by ETSI Technical Committee Telecommunications and Internet converged Services and Protocols for Advanced Networking (TISPAN).

The present document is part 13 of a multi-part deliverable covering the Dynamic synchronous Transfer Mode (DTM), as identified below:

- ES 201 803-1: "System description";
- ES 201 803-2: "System characteristics";
- ES 201 803-3: "Physical protocol";
- ES 201 803-4: "Mapping of DTM frames into SDH containers";
- ES 201 803-5: "Mapping of PDH over DTM";
- ES 201 803-6: "Mapping of Synchronous Digital Hierarchy (SDH) over DTM";
- ES 201 803-7: "Ethernet over DTM Mapping";
- ES 201 803-9: "Mapping of ATM over DTM";
- TR 101 803-10: "Routeing and switching of IP traffic over DTM";
- ES 201 803-11: "Mapping of video streams over DTM";
- ES 201 803-12: "Mapping of MPLS over DTM";
- ES 201 803-13: "System description of sub-rate DTM".**

Introduction

Dynamic synchronous Transfer Mode (DTM) is a time division multiplex and a circuit-switched network technique that combines switching and transport.

Part 1 describes the general properties of DTM and the DTM service over a unidirectional data channel. The overall system architecture is described and fundamental functions are identified.

Part 2 includes system aspects that are mandatory or optional for nodes from different vendors to interoperate. The interworking granularity should be at node level, such that nodes from different vendors can interoperate with regard to well-defined functions.

Part 3 specifies the physical layer for physical links based on 8B10B encoding.

Part 4 describes how DTM frames are mapped onto SDH containers.

The transport of various tributary signals is specified for PDH (part 5), SDH (part 6), Ethernet (part 7), ATM (part 9), IP (part 10), video streaming (part 11) and MPLS (part 12).

Substrate DTM is described in part 13.

1 Scope

The present document:

- specifies a method for mapping sub-rate time slots over normal time slot channels;
- specifies the characteristics of critical parameters for mapping sub-rate time slots over normal time slot channels;
- gives the terms and definitions for mapping encoding and decoding.

2 References

The following documents contain provisions, which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

- | | |
|-----|---|
| [1] | ETSI ES 201 803-1: "Dynamic synchronous Transfer Mode (DTM); Part 1: System description". |
| [2] | ETSI ES 201 803-2-3: "Dynamic synchronous Transfer Mode (DTM); Part 2: System characteristics; Sub-part 3: Transport network and channel adaptation aspects". |
| [3] | ETSI ES 201 803-2-1: "Dynamic synchronous Transfer Mode (DTM); Part 2: System characteristics; Sub-part 1: Data link aspects". |

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

sub-rate DTM: subsystem of DTM providing a fractional slot capacity as channel capacity resolution

sub-rate time slot: time slot in a sub-rate DTM super-frame

super-frame: multi-frame TDM structure

NOTE: Each frame is usually numbered, starting from the first frame in the multi-frame.

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

| | |
|-----|-----------------------------------|
| A | Adaptation function |
| AP | Access Point |
| C | Connection function |
| CHn | CHannel layer type n |
| CI | Characteristic Information |
| CK | ClocK |
| CMI | Channel Multiplex Identifier |
| CMT | Channel Map Table |
| CP | Connection Point |
| D | Data |
| DTM | Dynamic synchronous Transfer Mode |
| FS | Frame Start signal |
| MI | Management Information |
| MP | Management Point |
| SMT | Slot Map Table |
| SSF | Server Signal Fail |
| TI | Timing Information |
| TP | Timing Point |
| TS | Time Slot layer |
| TSF | Trail Signal Fail |
| TSs | sub-rate Time Slot sub-layer |
| TT | Trail Termination |

4 Overview

The sub-rate DTM system creates an overlay network over the normal DTM functionality, allowing channels to be created with a fractional capacity resolution compared to that of the normal 512 kb/s of the DTM system (ES 201 803-1 [1]). This enables efficient use of capacity for channels only requiring a fractional of the capacity and enables the same features for these channels as ordinary DTM channels allows. This overlay network is transported in ordinary time slot channels similar to tunnels, but with the distinct difference that the content is time-multiplexed inside the channel. In the overlay network only sub-rate enabled switches will be able to switch on the sub-rate layer, but the transport can occur through any number of normal DTM switches. Signalling of channels occurs using the normal DTM signalling mechanism, but for the overlay network instead of the physical network.

The sub-rate system providing the sub-rate time slot capacity of 8 kb/s will be detailed in the present document. Other sub-rates could be allowed in the future. Interaction between different sub-rates is however not directly achievable. A sub-rate of 8 kb/s will use a 64th part of a normal 512 kb/s slot capacity. In order to maintain the existing protocols, the DTM slot format is unchanged, but the frame rate is changed within the channel.

5 Time Slot sub-rate sub-layer (TSs)

The sub-rate DTM system creates a dedicated hierarchical layer in DTM adding a Time Slot sub-rate (TSs) sub-layer in the Time Slot (TS) (ES 201 803-2-3 [2]) layer (see figure 1). The sub-layer is placed over the normal Time Slot layer, but under the normal Channel layer, such that the existing channel and application functionality's can be utilized, but using a lower rate interface.

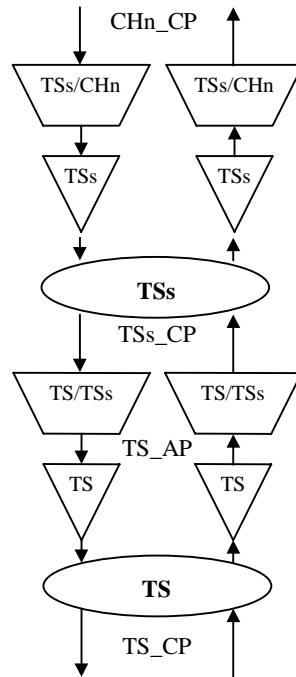


Figure 1: Time Slot sub-rate sub-layer atomic functions

5.1 Access point information

5.1.1 Characteristic Information

The Characteristic Information (CI) of the Connection Point (CP) is:

- the sub-rate time slot TDM frame TSs_CI_D being an integer multiple of sub-rate slots;
- the sub-rate time slot data clock timing TSs_CI_CK;
- the sub-rate time slot data super-frame start TSs_CI_FS;
- the sub-rate time slot data trail signal fail signal TSs_CI_SSF.

5.1.2 Adapted Information

The Adapted Information (AI) of the Adaptation Point (AP) is:

- the sub-rate time slot TDM frame TSs_AI_D being an integer multiple of sub-rate slots;
- the sub-rate time slot data clock timing TSs_AI_CK;
- the sub-rate time slot data super-frame start TSs_AI_FS;
- the sub-rate time slot data trail signal fail signal TSa_AI_SSF.

5.1.3 Management Information

The Management Information (MI) of the Management Point (MP) is:

- the connection function drop switching sub-rate time slot channel map table TSs_C_MI_CMTd;
- the connection function space sub-rate switching time slot channel map table TSs_C_MI_CMTs;
- the connection function sub-rate transport switching time slot channel map table TS_C_MI_CMTsr;

- the trail termination function server signal fail cause TSs_TT_Sk_MI_cSSF;
- the adaptation function source tunnelling slot map table TS/TSs_A_So_MI_SMT;
- the adaptation function sink tunnelling slot map table TS/TSs_A_Sk_MI_SMT.

5.1.4 Timing Information

The Timing Information (TI) of the Timing Point (TP) is:

- the sub-rate time slot data clock timing indication TSs_TI_CK;
- the sub-rate time slot super-frame start timing indication TSs_TI_FS.

5.2 Connection function (TSs_C)

The connection function of the sub-rate time slot layer (TSs_C) provides support for dropping traffic and space switching. The connection function of the time slot layer (TS_C) has an additional functionality added.

5.2.1 Drop switching

The connection function provides for drop switching of a channel by allowing the switching from an incoming channel to a sub-rate time slot trail termination. This switching is performed when the slot is marked for drop switching in the TSs_C_MI_CMTd.

5.2.2 Space switching

The connection function provides for space switching of sub-rate time slot channels TDM frame from an incoming channel to that of an outgoing channel. The channel source for an outgoing channel is specified in the TSs_C_MI_CMTs.

5.2.3 Sub-rate Time Slot Transport switching

The connection function provides for sub-rate time slot transport switching over the underlying time slot channel. It provides a sub-rate time slot channel with associated mapping to allow multiple sub-rate time slot channels to be transported through a single time slot channel.

On the source side is the tunnelled sub-rate time slot channels switched through the source TS/TSs adaptation function and TS trail termination. The output of the trail termination is then switched to the underlying time slot channel which may be space, protected or tunnel switched.

On the sink side is the time slot channel switched to the sink TS trail terminator and sink TS/TSs adaptation function. The output of the TS/TSs adaptation function provides the individual sub-rate time slot channels that where transported. These may be drop or switched.

The sub-rate time slot transport switch is controlled by the management signal TS_C_MI_CMTsr.

5.3 Trail Termination functions (TSs_TT)

The trail termination functions are empty mappings between AI and CI.

5.3.1 Sub-rate Time Slot Trail Termination function (TSs_TT)

The sub-rate time slot sub-rate trail termination provides the supervision of a sub-rate time slot channel over a time slot trail.

5.3.1.1 Sub-rate Time Slot Trail Termination Source function (TSs_TT_So)

Symbol:




Figure 2: Sub-rate Time Slot Trail Termination Source (TSs_TT_So)

Interfaces:

Table 1: TSs_TT_So Input and output signals

| Input(s) | Output(s) |
|------------|------------|
| TSs_AI_D | TSs_CI_D |
| TSs_AI_CK | TSs_CI_CK |
| TSs_AI_FS | TSs_CI_FS |
| TSs_AI_TSF | TSs_CI_SSF |

Processes and anomalies:

None.

Defects:

None.

Consequent actions:

None.

Defect correlation:

None.

Performance monitoring:

None.

Output mapping:

TSs_CI_D ← TSs_AI_D.

TSs_CI_CK ← TSs_AI_CK.

TSs_CI_FS ← TSs_AI_FS.

TSs_CI_SSF ← TSs_AI_TSF.

Fault management:

None.

Long term performance monitoring:

None.

5.3.1.2 Sub-rate Time Slot Trail Termination Sink function (TSs_TT_Sk)

Symbol:




Figure 3: Sub-rate Time Slot Trail Termination Sink (TSs_TT_Sk)

Interfaces:

Table 2: TSs_TT_Sk Input and output signals

| Input(s) | Output(s) |
|------------|-------------------|
| TSs_CI_D | TSs_AI_D |
| TSs_CI_CK | TSs_AI_CK |
| TSs_CI_FS | TSs_AI_FS |
| TSs_CI_SSF | TSs_AI_TSF |
| | TSs_TT_Sk_MI_cSSF |

Processes and anomalies:

None.

Defects:

None.

Consequent actions:

aTSF: The Trail Signal Fail action (aTSF) is asserted when the Server Signal Fail (CI_SSF) is asserted.
See ES 201 803-2-3 [2] clause 6.3.1.3.

$aTSF \leftarrow CI_SSF$.

Defect correlation:

cSSF: The Server Signal Fail cause (cSSF) is asserted when the Server Signal Fail (CI_SSF) is asserted.
See ES 201 803-2-3 [2] clause 6.4.6.2.

$cSSF \leftarrow CI_SSF$.

Performance monitoring:

None.

Output mapping:

$TSs_AI_D \leftarrow TSs_CI_D$.

$TSs_AI_CK \leftarrow TSs_CI_CK$.

$TSs_AI_FS \leftarrow TSs_CI_FS$.

$TSs_AI_TSF \leftarrow aTSF$.

$TSs_TT_Sk_MI_cSSF \leftarrow cSSF$.

Fault management:

fSSF (TT_Sk): The Server Signal Fail fault (fSSF) is asserted when the Server Signal Fail cause (cSSF) is asserted consistently for $2,5 \pm 0,5$ s and deasserted when the cSSF have been deasserted for $10 \pm 0,5$ s. See ES 201 803-2-3 [2] clause 6.6.1.4.

Long term performance monitoring:

None.

5.4 Adaptation functions

5.4.1 Time Slot to sub-rate Time Slot Adaptation function (TS/TSs_A)

The time slot to sub-rate time slot adaptation function provides the mapping of channel TDM frames of the sub-rate time slot layer in and out of the time slot layer TDM frame. Any excess slots will have Idle-marker generated.

5.4.1.1 Time Slot to sub-rate Time Slot Adaptation Source function (TS/TSs_A_So)

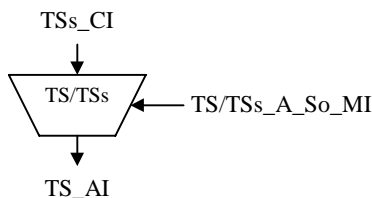
Symbol:

Figure 4: Time Slot to sub-rate Time Slot Adaptation Source (TS/TSs_A_So)

Interfaces:

Table 3: TS/TSs_A_So Input and output signals

| Input(s) | Output(s) |
|--------------------|-----------|
| TSs_CI_D | TS_AI_D |
| TSs_CI_CK | TS_AI_CK |
| TSs_CI_FS | TS_AI_FS |
| TSs_CI_SSF | TS_AI_TSF |
| TS/TSs_A_So_MI_SMT | |

Processes and anomalies:

Per TSs channel:

The TDM slot assignment of slots in the TSs_CI_D TDM frame to the sD TDM frame slots according to a slot-to-slot mapping given by the management slot table TS/TSs_A_So_MI_SMT. The slot mapping may be either the monotonic rising or arbitrary mapping. See ES 201 803-2-3 [2], clause 6.1.14.3.

The excess TDM slots in the sD TDM frame which have no mapping from the TS_CI_D TDM frame shall continuously (once per frame and slot position) be sent an Idle-marker. A sD TDM slot is marked as an excess slot in the management slot table TS/TSs_A_So_MI_SMT. See ES 201 803-2-3 [2] clause 6.1.14.3.

Common processing:

The multiplexing of slots in the sD TDM frame into the AI_D TDM frame as defined in clause 6.

Defects:

None.

Consequent actions:

None.

Defect correlation:

None.

Performance monitoring:

None.

Output mapping:

$TS_AI_D \leftarrow AI_D$.

$TS_AI_CK \leftarrow TSs_CI_CK$.

$TS_AI_FS \leftarrow TSs_CI_FS$.

$TS_AI_TSF \leftarrow TSs_CI_SSF$.

Fault management:

None.

Long term performance monitoring:

None.

5.4.1.2 Time Slot to sub-rate Time Slot Adaptation Sink function (TS/TSs_A_Sk)

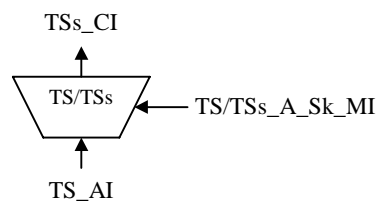
Symbol:

Figure 5: Time Slot to sub-rate Time Slot Adaptation Sink (TS/TSs_A_Sk)

Interfaces:

Table 4: TS/TSs_A_Sk Input and output signals

| Input(s) | Output(s) |
|--------------------|------------|
| TS_AI_D | TSs_CI_D |
| TS_AI_CK | TSs_CI_CK |
| TS_AI_FS | TSs_CI_FS |
| TS_AI_TSF | TSs_CI_TSF |
| TS/TSs_A_Sk_MI_SMT | |

Processes and anomalies:**Common processing:**

The monitoring of super-frame alignment pattern on data slot 0 in order to identify the initial frame of a multi-frame sub-rate transport stream according clause 6.

The demultiplexing of slots in the AI_D TDM frame into the sD TDM super-frame as defined in clause 6.

Per TSs channel:

The TDM slot access of slots in the sD TDM frame to the TSs_CI_D TDM frame for the channel according to a slot-to-slot mapping given by the management slot table TS/TSs_A_Sk_MI_SMT. The slot mapping may be either the monotonic rising or arbitrary mapping. See ES 201 803-2-3 [2], clause 6.1.14.3.

The excess TDM slots in the TS_CI_D TDM frame which have no mapping from the sD TDM frame shall continuously (once per frame and slot position) be send an Idle-marker. A TS_CI_D TDM slot is marked as an excess slot in the management slot table TS/TSs_A_Sk_MI_SMT. See ES 201 803-2-3 [2], clause 6.1.14.3.

Defects:

None.

Consequent actions:

None.

Defect correlation:

None.

Performance monitoring:

None.

Output mapping:

$TSs_CI_D \leftarrow CI_D$.

$TSs_CI_CK \leftarrow TS_AI_CK$.

$TSs_CI_FS \leftarrow TS_AI_FS$.

$TSs_CI_SSF \leftarrow TS_AI_TSF$.

Fault management:

None.

Long term performance monitoring:

None.

5.4.2 Sub-rate Time Slot to Channel 1 Adaptation function (TSs/CH1_A)

The sub-rate time slot to channel 1 adaptation function provides the mapping of channel TDM frames of the synchronous channel layer in and out of the sub-rate time slot layer TDM frame.

5.4.2.1 Sub-rate Time Slot to Channel 1 Adaptation Source function (TSs/CH1_A_So)

Symbol:




Figure 6: Sub-rate Time Slot to Channel 1 Adaptation Source (TSs/CH1_A_So)

Interfaces:**Table 5: TSs/CH1_A_So Input and output signals**

| Input(s) | Output(s) |
|------------|------------|
| CH1_CI_D | TSs_AI_D |
| CH1_CI_CK | TSs_AI_CK |
| CH1_CI_FS | TSs_AI_FS |
| CH1_CI_SSF | TSs_AI_TSF |

Processes and anomalies:

None.

Defects:

None.

Consequent actions:

None.

Defect correlation:

None.

Performance monitoring:


None.

Output mapping:TSs_AI_D \leftarrow CH1_CI_D.TSs_AI_CK \leftarrow CH1_CI_CK.TSs_AI_FS \leftarrow CH1_CI_FS.TSs_AI_TSF \leftarrow CH1_CI_SSF.**Fault management:**

None.

Long term performance monitoring:

None.

5.4.2.2 Sub-rate Time Slot to Channel 1 Adaptation Sink function (TSs/CH1_A_Sk)**Symbol:****Figure 7: Sub-rate Time Slot to Channel 1 Adaptation Sink (TSs/CH1_A_Sk)**

Interfaces:**Table 6: TSs/CH1_A_Sk Input and output signals**

| Input(s) | Output(s) |
|------------|------------|
| TSs_AI_D | CH1_CI_D |
| TSs_AI_CK | CH1_CI_CK |
| TSs_AI_FS | CH1_CI_FS |
| TSs_AI_TSF | CH1_CI_SSF |

Processes and anomalies:

None.

Defects:

None.

Consequent actions:

None.

Defect correlation:

None.

Performance monitoring:

None.

Output mapping:CH1_CI_D \leftarrow TSs_AI_D.CH1_CI_CK \leftarrow TSs_AI_CK.CH1_CI_FS \leftarrow TSs_AI_FS.CH1_CI_SSF \leftarrow TSs_AI_TSF.**Fault management:**

None.

Long term performance monitoring:

None.

6 Sub-rate Time Slot mapping

The DTM sub-rate time slot mapping creates a super-frame internal to a normal DTM channel. Within this super-frame a virtual slot number scheme is used for DTM slots of lower frame-rate. The super-frame spans M number of DTM frames. M is defined to be 64. A super-frame consisting of M = 64 slots will create a sub-rate slot capacity of 8 kb/s.

NOTE 1: Other super-frame sizes may be chosen, by selecting any other integer size of the super-frame. Integer sized being on the power of two may be preferred.

A super-frame may use one or more normal DTM slots in order to accommodate an aggregate capacity larger than M sub-rate slots. The full number of sub-rate slots is the number N of normal slots used times the super-frame size M.

A sub-rate time slot switch contains one or more virtual interfaces over which the sub-rate channels can be switched. Each virtual interface maps to a sub-rate time slot over normal time slot transport. The number of sub-rate slots on one virtual interface of a sub-rate system may be different from the number on another virtual interface of the same sub-rate system.

NOTE 2: However, switching is only defined between virtual interfaces and/or trail-terminators of the same super-frame size. Thus, if multiple sub-rate size coexists in a system, then they must be treated separately.

The sub-rate transport channels form an overlay network on top of the normal DTM functionality. The transported channel capacity available in this overlay network is quantized to the sub-rate time slot capacity (8 kb/s) rather than to the normal 512 kb/s capacity of a normal time-slot.

The super-frame enumerates the DTM frame in the numbers of 0 to M-1. The N number of slots being used for a virtual interface will be numbered 0 to N-1. Given a sub-rate slot s, the mapped super-frame be m and the mapped slot number n will be such that $s = n * M + m$. This mapping allows for dynamic changes of N without the need of re-mapping existing traffic.

NOTE 3: This is achieved when $n = s \text{ DIV } M$ and $m = s \text{ MOD } M$.

NOTE 4: The drawback of this strategy in mapping is that slot order is not necessarily time transfer order. Slot 64 will be transferred before slot 63, whereas slot 0 and slot 64 will be transferred in the same frame.

The slot 0 of the sub-rate super-frame is used as a signalling slot as well as a super-frame marker. The slot 0 usage is described in ES 201 803-2-1 [3] clause 5. By converting idle-traffic between signalling packets with a stream consisting of a dedicated DCAP-1 message providing a super-frame indication marker, encoded in the CMI field, can the super-frame slot-alignment be found and retrieved. The super-frame indication marker message holds no data. In the receiving end the DCAP-1 packets containing the super-frame indication marker shall be replaced with Idle-traffic.

History

| Document history | | |
|------------------|--------------|--|
| V1.1.1 | October 2004 | Membership Approval Procedure MV 20041224: 2004-10-26 to 2004-12-24 |
| V1.1.1 | January 2005 | Publication |
| | | |
| | | |
| | | |