

ETSI EN 300 267-4 V1.2.4 (2000-06)

European Standard (Telecommunications series)

**Integrated Services Digital Network (ISDN);
Telephony 7 kHz, videotelephony, audiographic conference
and videoconference teleservices;
Digital Subscriber Signalling System No. one (DSS1) protocol;
Part 4: Abstract Test Suite (ATS) and partial Protocol
Implementation eXtra Information for Testing (PIXIT)
proforma specification for the user**



Reference

REN/SPS-05112-4

Keywords7kHz, ATS, audio, conf, DSS1, ISDN, PIXIT,
telephony, teleservice, user, video**ETSI**

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF).

In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:

editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000.
All rights reserved.

Contents

Intellectual Property Rights.....	5
Foreword	5
1 Scope.....	6
2 References.....	6
3 Definitions and abbreviations	7
3.1 Definitions.....	7
3.2 Abbreviations.....	7
4 Introduction.....	8
5 Abstract Test Method (ATM).....	8
5.1 Description of ATM used.....	8
5.2 Conventions for test components and PCOs	9
5.3 Description of PCOs	9
5.3.1 D-channel PCO.....	9
5.3.2 B-channels PCOs.....	10
5.4 Naming conventions.....	10
5.4.1 Test cases	10
5.4.2 Variables and parameters	11
5.4.3 Trees and subtrees	11
6 Untestable test purposes.....	11
7 ATS conventions.....	12
7.1 Declarations part	12
7.1.1 Type definitions.....	12
7.1.1.1 Simple type definitions.....	12
7.1.1.2 Structured type definitions.....	12
7.1.1.2.1 TTCN structured type definitions	12
7.1.1.2.2 ASN.1 structured type definitions.....	12
7.1.1.3 ASP type definitions.....	12
7.1.1.3.1 TTCN ASP type definitions.....	12
7.1.1.3.2 ASN.1 ASP type definitions	13
7.1.1.4 PDU type definitions	13
7.1.1.4.1 TTCN PDU type definitions	13
7.1.1.4.2 ASN.1 PDU type definitions.....	13
7.1.2 Test suite constants.....	13
7.1.3 Test suite parameters.....	13
7.1.4 Variables	14
7.1.4.1 Test suite variables	14
7.1.4.2 Test case variables.....	14
7.1.5 Test suite operation definitions.....	14
7.2 Constraints part	15
7.2.1 Structured type constraint declaration	15
7.2.2 ASN.1 type constraint declaration.....	15
7.2.3 ASP type constraint declaration	15
7.2.3.1 ASN.1 ASP type constraint declaration.....	15
7.2.3.2 TTCN ASP type constraint declaration	15
7.2.4 PDU type constraint declaration.....	15
7.2.4.1 ASN.1 PDU type constraint declaration.....	15
7.2.4.2 TTCN PDU type constraint declaration	15
7.2.5 Derived constraints.....	15
7.2.6 Parameterized constraints.....	15
7.2.7 Value assignment.....	16
7.2.7.1 Specific values.....	16
7.2.7.2 Matching values.....	16

7.3	Dynamic part.....	16
7.3.1	Test cases	16
7.3.2	Test steps.....	16
7.3.3	Defaults	16
7.3.4	Synchronization.....	17
8	ATS to TP map.....	19
9	PCTR conformance	19
10	PIXIT conformance.....	19
11	ATS conformance	19
Annex A (normative): Protocol Conformance Test Report (PCTR) proforma.....		20
A.1	Identification summary	20
A.1.1	Protocol conformance test report.....	20
A.1.2	IUT identification.....	20
A.1.3	Testing environment.....	20
A.1.4	Limits and reservations.....	21
A.1.5	Comments.....	21
A.2	IUT Conformance status	21
A.3	Static conformance summary	21
A.4	Dynamic conformance summary.....	22
A.5	Static conformance review report	22
A.6	Test campaign report.....	23
A.7	Observations.....	25
Annex B (normative): Partial PIXIT proforma.....		26
B.1	Identification summary	26
B.2	Abstract test suite summary	26
B.3	Test laboratory	26
B.4	Client (of the test laboratory).....	27
B.5	System Under Test (SUT).....	27
B.6	Protocol information	28
B.6.1	Protocol identification.....	28
B.6.2	Configuration to be tested	28
B.6.3	Actions required to stimulate IUT	29
B.6.4	Test management timers	29
B.6.5	Parameter values.....	30
Annex C (normative): Abstract Test Suite (ATS).....		31
C.1	The TTCN Graphical form (TTCN.GR).....	31
C.2	The TTCN Machine Processable form (TTCN.MP)	31
Annex D (informative): General structure of ATS.....		32
	History	33

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Services and Protocols for Advanced Networks (SPAN).

The present document is part 4 of a multi-part EN covering the Digital Subscriber Signalling System No. one (DSS1) protocol specification for the Integrated Services Digital Network (ISDN) telephony 7 kHz, videotelephony, audiographic conference and videoconference teleservices, as described below:

- Part 1: "Protocol specification";
- Part 2: "Protocol Implementation Conformance Statement (PICS) proforma specification";
- Part 3: "Test Suite Structure and Test Purposes (TSS&TP) specification for the user";
- Part 4: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the user";**
- Part 5: "Test Suite Structure and Test Purposes (TSS&TP) specification for the network";
- Part 6: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the network".

National transposition dates	
Date of adoption of this EN:	26 May 2000
Date of latest announcement of this EN (doa):	31 August 2000
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	28 February 2001
Date of withdrawal of any conflicting National Standard (dow):	28 February 2001

1 Scope

The present document specifies the Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma for the User side of the T reference point or coincident S and T reference point (as defined in ITU-T Recommendation I.411 [16]) of implementations conforming to the stage three standard of the telephony 7 kHz, videotelephony, audiographic conference and videoconference teleservices for the pan-European Integrated Services Digital Network (ISDN) by means of the Digital Subscriber Signalling System No. one (DSS1) protocol, EN 300 267-1 [5].

EN 300 267-3 [7] specifies the Test Suite Structure and Test Purposes (TSS&TP) related to this ATS and partial PIXIT proforma specification. Other parts specify the TSS&TP and the ATS and partial PIXIT proforma for the Network side of the T reference point or coincident S and T reference point of implementations conforming to EN 300 267-1 [5].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

- [1] ETSI ETS 300 143: "Integrated Services Digital Network (ISDN); Audiovisual services Inband signalling procedures for audiovisual terminals using digital channels up to 2 048 kbit/s".
- [2] ETSI ETS 300 144: "Integrated Services Digital Network (ISDN); Audiovisual services; Frame structure for a 64 kbit/s to 1 920 kbit/s channel and associated syntax for inband signalling".
- [3] ETSI ETS 300 145: "Integrated Services Digital Network (ISDN); Audiovisual services; Videotelephone systems and terminal equipment operating on one or two 64 kbit/s channels".
- [4] ETSI EN 300 196-1 (V1.2): "Integrated Services Digital Network (ISDN); Generic functional protocol for the support of supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [5] ETSI EN 300 267-1 (V1.2): "Integrated Services Digital Network (ISDN); Telephony 7 kHz, videotelephony, audiographic conference and videoconference teleservices; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [6] ETSI EN 300 267-2 (V1.2): "Integrated Services Digital Network (ISDN); Telephony 7 kHz, videotelephony, audiographic conference and videoconference teleservices; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 2: Protocol Implementation Conformance Statement (PICS) proforma specification".
- [7] ETSI EN 300 267-3 (V1.2): "Integrated Services Digital Network (ISDN); Telephony 7 kHz, videotelephony, audiographic conference and videoconference teleservices; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 3: Test Suite Structure and Test Purposes (TSS&TP) specification for the user".
- [8] ETSI EN 300 403-1 (V1.2): "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Signalling network layer for circuit-mode basic call control; Part 1: Protocol specification [ITU-T Recommendation Q.931 (1993), modified]".

- [9] ETSI ETS 300 403-5: "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Signalling network layer for circuit-mode basic call control; Part 5: Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the user".
- [10] ETSI I-ETS 300 763-2: "Integrated Services Digital Network (ISDN); Audiovisual services in-band signalling testing; Part 2: Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification".
- [11] ISO/IEC 9646-1 (1994): "Information technology; Open Systems Interconnection; Conformance testing methodology and framework; Part 1: General concepts".
- [12] ISO/IEC 9646-2 (1994): "Information technology; Open Systems Interconnection; Conformance testing methodology and framework; Part 2: Abstract Test Suite specification".
- [13] ISO/IEC 9646-3 (1998): "Information technology; Open Systems Interconnection; Conformance testing methodology and framework; Part 3: The Tree and Tabular Combined Notation (TTCN)".
- [14] ISO/IEC 9646-4 (1994): "Information technology; Open Systems Interconnection; Conformance testing methodology and framework; Part 4: Test realization".
- [15] ISO/IEC 9646-5 (1994): "Information technology; Open Systems Interconnection; Conformance testing methodology and framework; Part 5: Requirements on test laboratories and clients for the conformance assessment process".
- [16] ITU-T Recommendation I.411 (1993): "ISDN user-network interfaces - Reference configurations".
- [17] ETSI EN 300 403-3 (V1.2): "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Signalling network layer for circuit-mode basic call control; Part 3: Protocol Implementation Conformance Statement (PICS) proforma specification".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the definitions given in EN 300 267-1 [5], ISO/IEC 9646, parts 1 [11] to 5 [15] and the following terms and definitions apply:

additional B-channel: second or subsequent B-channel established in a videotelephony call.

initial B-channel: first channel established in a videotelephony call.

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ASP	Abstract Service Primitive
ATM	Abstract Test Method
ATS	Abstract Test Suite
BAS	Bit rate Allocation Signal
CES	Connection Endpoint Suffix
CM	Co-ordination Message
CP	Co-ordination Point
CRC	Cyclic Redundancy Check
ExTS	Executable Test Suite
FAW	Frame Alignment Word
IUT	Implementation Under Test
LT	Lower Tester
MOT	Means Of Testing

MTC	Main Test Component
PCO	Point of Control and Observation
PCTR	Protocol Conformance Test Report
PDU	Protocol Data Unit
PICS	Protocol Implementation Conformance Statement
PIXIT	Protocol Implementation eXtra Information for Testing
PTC	Parallel Test Component
SUT	System Under Test
TP	Test Purpose
TSS	Test Suite Structure
TTCN	Tree and Tabular Combined Notation

4 Introduction

Implementations Under Test (IUTs) which are to be tested using this ATS are required to have previously been tested for conformity against and passed the test suite for EN 300 403-1 [8], and the ATS related to ETS 300 143 [1], ETS 300 144 [2] and ETS 300 145 [3] which is contained in I-ETS 300 763-2 [10].

Any messages or fields within messages which are introduced by ETS 300 403-1 [8] are included in this ATS. Behaviours in test cases have been described in such a way to be able to take into account ETS 300 403-1 [8] basic call standard. This ATS also takes into account messages defined for the supplementary services, in particular ETS 300 196-1 [4]. When such messages are received, they are ignored by the ATS as this is not within the scope of the present document.

5 Abstract Test Method (ATM)

5.1 Description of ATM used

This ATS describes the testing specification of the protocol procedures and switching functions needed to support the videotelephony, telephony 7 kHz, audiographic conference and videoconference teleservices at T or coincident S and T reference points for the user.

Testing activity will take place on the D-channel and on one or two B-channels depending on which teleservice is supported and where the service is provided. The videotelephony, audiographic conference and videoconference teleservices can employ two or more B-channels and telephony 7 kHz teleservice up to one B-channel. Only S and T reference point has an associated in-band protocol entity and has to follow requirements on B-channels.

As a consequence of testing multiple channels simultaneously, the concurrent testing method is used. A test configuration includes at least a master test component for controlling co-ordination and D-channel activity and eventually one or two PTCs for each involved B-channel. Each of the MTC and PTCs has got a Point of Control and Observation (PCO). The remote test method as defined in ISO/IEC 9646-2 [12] is applied.

5.2 Conventions for test components and PCOs

Figure 1 shows a logical view of the complete configuration of the MTC, PTCs, and PCOs. The Co-ordination Point (CP) relationships between the various components are also indicated. The test method used is very close to the test method used in I-ETS 300 763-2 [10].

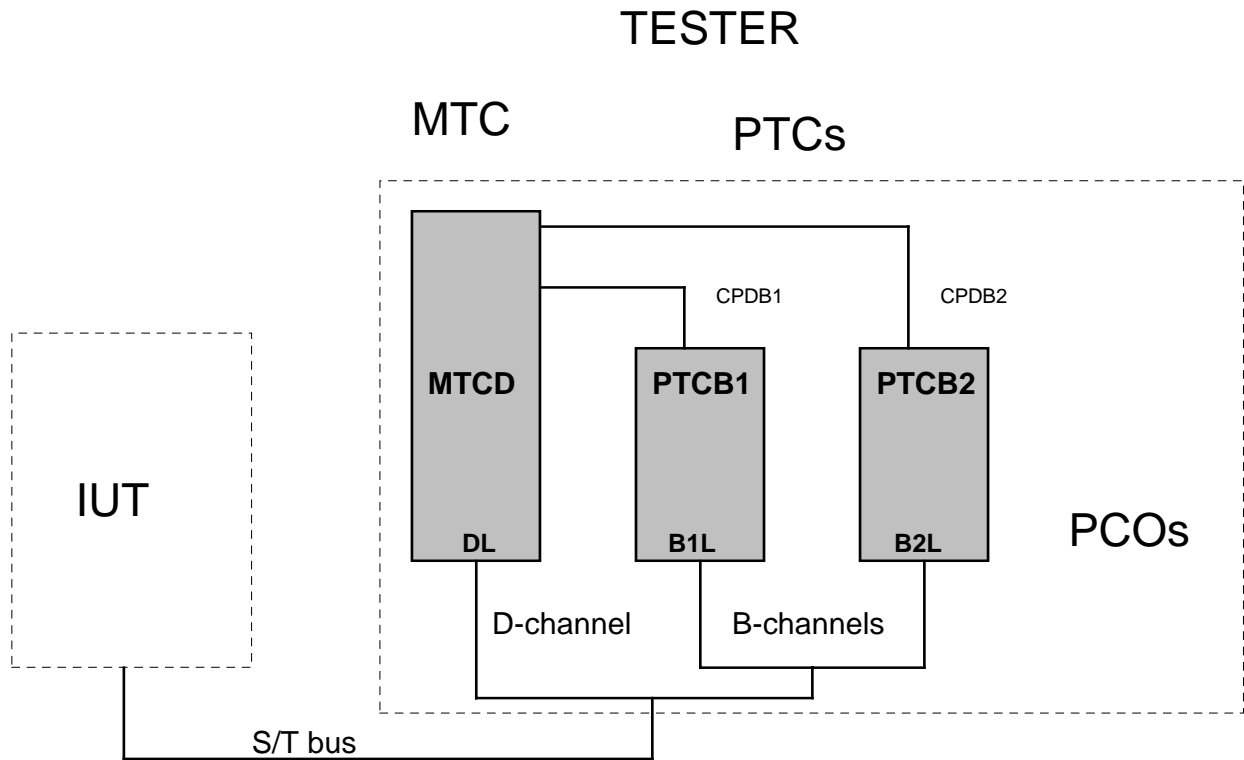


Figure 1: Multi-party test method

In a master/slave arrangement, the MTC is considered to be the master while the PTCs are the slaves.

There are communication paths or CPs between the MTC and each PTC (ie. CPDB1 and CPDB2). The MTC handles all scheduling of test components and exchanges messages with PTCs to start or to stop the running of their associated tree. Also, messages concerning more functional synchronization like advising the initial B-channel that it can expand the mode on two B-channels when the additional B-channel is set up.

5.3 Description of PCOs

The PCOs are used to control and observe the behaviour of the IUT. Preliminary test case verdicts are assigned depending on the behaviour observed at those points. The final verdict is set by the MTC at the end of the test.

5.3.1 D-channel PCO

For the D-channel, the PCO resides at the service access point between layers 2 and 3. This PCO is named "DL" (L for Lower). The same Abstract Service Primitives (ASPs) as defined in EN 300 403-5 [9] are used.

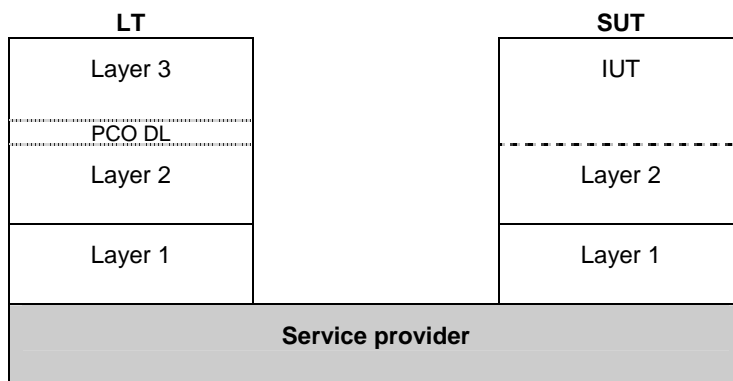


Figure 2: Remote test method

5.3.2 B-channels PCOs

For the in-band signalling protocol there is no explicit layered structure. However, there is an implicitly defined structure: a lower layer dealing with frame and multiframe structure, bit encoding of BAS codes and their corresponding CRC codes, FAW etc., and a higher layer dealing with the various sequences and procedures which make use of BAS codes to control the communication.

Lower layer PCOs and the corresponding declarations have been reused from the ATS specified in I-ETS 300 763-2 [10]. When a test case needs description behaviour at a higher layer which cannot be easily expressed at a lower layer, e.g. a complete initialization procedure, and because it is not the purpose of this ATS to check in-band signalling, references to the test step included in the ATS specified in I-ETS 300 763-2 [10] are made instead of importing all of the ASN.1 descriptions.

The audio and video signal contents in the frames and multiframes are ignored. Audio encoding/decoding is out of scope of the present document and requires specific test tools. As it is not possible to analyse the unframed mode, this is not described in the present document.

In the B-channel, frames or multiframes are required to be sent and received continuously to maintain frame alignment and this is achieved by looping until the expected frame or multiframe is received or the timer expires.

A procedure for the detection of incorrect CRC4 is described in this ATS. This depends on the detection of an ASP which is generated when the tester implements CRC4 and detects incorrect bit values in bits C1-C4.

5.4 Naming conventions

5.4.1 Test cases

Test cases have exactly the same reference as the corresponding combined test purpose, see EN 300 267-3 [7].

The structure of a test case identifier is as follows:

- CT<digit><digit><digit>_<digit><digit> test case covering a telephony 7 kHz requirement;
- CV<digit><digit><digit>_<digit><digit> test case covering a videotelephony requirement;
- CA<digit><digit><digit>_<digit><digit> test case covering an audiographic conference requirement;
- CC<digit><digit><digit>_<digit><digit> test case covering a videoconference requirement.

The digits correspond to the digits of the first Test Purpose (TP) included in the combined TP. The TPs are ordered:

- a) by type of requirement (i.e. generic, telephony 7 kHz, videotelephony, audiographic conference or videoconference);
- b) by a three digit number which specifies the relevant position in the Test Suite Structure (TSS):
 - the first digit refers to the third test group level:
 - 1) for Calling user interface (ORIG);
 - 2) for Called user interface (DEST).
 - the second digit refers to the fourth test group level:
 - 1) Valid behaviour (BV);
 - 2) Inopportune behaviour (BO).
 - the third digit refers to the fifth test group level:
 - 1) Fallback allowed (FBA);
 - 2) Fallback not allowed (FBN);
 - 3) Connection management (CMN).
- c) by a two digit sequence number:
 - the sequence number follows the order in which the TPs appear.

5.4.2 Variables and parameters

Variables used in PTCs are prefixed by the letter B.

channel nr	B_CHN1
channel nr	B_CHN2
boolean to end repeat loop	B_END_LOOP
boolean to end repeat loop	B_END_LOOP2

5.4.3 Trees and subtrees

Test step names use upper case letters and local subtrees use lower case letters.

Preamble subtrees are prefixed by "PR_" and postamble subtrees by "PO_".

6 Untestable test purposes

Combined TPs correspond only to testable TPs and are all covered by the ATS.

TPs for generic protocol requirements do not correspond to specific protocol behaviour and only describe parts of EN 300 267-1 [5] which support the telephony 7 kHz, videotelephony, audiographic conference and videoconference teleservices. These TPs have been considered as untestable.

7 ATS conventions

This clause is structured similarly to the structure of a TTCN ATS. However, the names of the subclauses are arranged in a way more suitable to the present document.

7.1 Declarations part

7.1.1 Type definitions

7.1.1.1 Simple type definitions

Where appropriate, simple types have a length, a value list or a range restriction attached.

Simple types defined as being of some string type (e.g. BITSTRING, OCTETSTRING), have a length restriction or a value list attached.

Simple types, defined as being of INTEGER type, have a value list or a range restriction attached.

7.1.1.2 Structured type definitions

7.1.1.2.1 TTCN structured type definitions

All structured type definitions are provided with a full name.

All elements in every structured type definition, defined as being of some string type (e.g. BITSTRING, OCTETSTRING), have a length restriction attached.

If an element in a structured type definition is defined as being of a referenced type, the (possible) restriction is defined in that referenced type.

For information elements, the identifier which is unique for each element, has its type defined as a simple type where the value list is restricted to the single value which is the identifier itself. This has the advantage that it allows a test system derived from this ATS to easily identify information elements embedded in messages. An ATS where information element identifiers are represented as unrestricted types can present difficulties for a derived test system in the case where it needs to find one information element embedded in a number of others and the constraints for the other elements have the any-or-omit value. In such a case the test system cannot easily find the beginning of each information element.

7.1.1.2.2 ASN.1 structured type definitions

There are no ASN.1 structured type definitions in the ATS.

7.1.1.3 ASP type definitions

7.1.1.3.1 TTCN ASP type definitions

TTCN ASP type definitions only contain one PDU or no PDU at all.

All TTCN ASP type definitions are provided with a full identifier.

Some ASPs are not parameterized as shown in the example in table 1. Such ASPs are only used for requesting or receiving service from the B-channel lower layer.

Table 1: TTCN ASP type definition SEND_UNFRAMED

TTCN ASP Type Definition		
ASP NAME : SEND_UNFRAMED		
PCO Type : BSAP		
Comments : Tester will send in unframed mode continuously until another send event occurs		
Parameter Name	Parameter Type	Comments
Detailed Comments :		

Table 2 shows an example of a parameterized ASP. All ASPs containing PDUs contain only that PDU and no other parameters.

Table 2: TTCN ASP type definition DL_DAT_RQ

TTCN ASP Type Definition		
ASP NAME : DL_DAT_RQ (DL_DATA_REQUEST)		
PCO Type : DSAP		
Comments :		
Parameter Name	Parameter Type	Comments
mun (MessageUnit)	PDU	
Detailed Comments :		

To make TTCN more readable, aliases have been defined for ASPs.

7.1.1.3.2 ASN.1 ASP type definitions

There are no ASN.1 ASP type definitions in the ATS.

7.1.1.4 PDU type definitions

7.1.1.4.1 TTCN PDU type definitions

The TTCN PDU type reflects the actual data being transferred or received. All PDUs for the D-channel are embedded in ASPs. For the B-channel, because no ASP has been defined for the in-band signalling protocol, frames or multiframe are sent and received on their own.

A meta-type ASP has been defined for all messages which do not require the fields inside to be referenced. This meta-type ASP carries the parameter type PDU. There is one meta-type ASP for send events and one for receive events, named DL_DAT_RQ and DL_DAT_IN, respectively. If certain fields of a PDU have to be referenced, then a particular ASP type has been defined for that message. For example, the call reference of an outgoing SETUP message needs to be read by the tester and therefore the ASP type DL_DAT_IN_SETUP has been defined for this event.

7.1.1.4.2 ASN.1 PDU type definitions

There are no ASN.1 PDU type definitions in the ATS.

7.1.2 Test suite constants

Each test suite constant is defined in terms of a predefined type. The values given in the value column will remain unchanged throughout the ATS.

7.1.3 Test suite parameters

Each test suite parameter is defined in terms of a predefined type or a referenced type. A referenced type is used when it is necessary to attach restrictions to these type definitions (it is not allowed to include restrictions directly in the test suite parameter table). The referenced type can have a length or value restriction attached to it in its declaration table.

7.1.4 Variables

7.1.4.1 Test suite variables

In concurrent TTCN these kind of variables can be used only by the MTC. To check that the IUT can achieve synchronization in a two B-channel communication, a shared counter is needed in order to send multiframes with the same numbering in both B-channels. PTCs PTCB1 and PTCB2, corresponding to each B-channel, are located on the same machine. Therefore, the test suite variables B_SEMAPHORE, B_SMF_COUNTER and B_SMF_ADDC_COUNTER can be accessed by both PTCs. The B_SEMAPHORE variable is used to prevent the two PTCs from updating the B_SMF_ADDC_COUNTER simultaneously. B_SMF_COUNTER and B_SMF_ADDC_COUNTER correspond to the counters for sub-multiframes sent in the initial and the additional B-channels, respectively.

7.1.4.2 Test case variables

Each test case variable is defined in terms of a predefined type or a referenced type. A referenced type is used when it is necessary to attach restrictions to these type definitions (it is not allowed to include restrictions directly in the test case variable table). The referenced type can have a length or value restriction attached to it in its declaration table.

Where test case variables are used in constraints, they are passed as formal parameters.

7.1.5 Test suite operation definitions

The description part of a test suite operation definition uses either natural language or meta C.

Table 3: Test suite operation definition ASSIGN_CHI

Test Suite Operation Definition	
Operation Name	: ASSIGN_CHI(basic, primary : CHI; basic_flag : BOOLEAN)
Result Type	: CHI
Comments	: This operation is used to assign a correct Channel identification information element to PDUs depending on the type of access that is tested.
Description	
CHI ASSIGN_CHI(basic,primary,basic_flag)	
<p>If the value of the basic_flag is set to TRUE, the result of the operation ASSIGN_CHI will be the value represented by the parameter basic which is of type CHI. Else the operation results in the value represented by the parameter primary.</p>	
<p>Examples:</p> <pre>ASSIGN_CHI(CHI1b_R1, CHI1p_R1, TRUE) = CHI1b_R1 ASSIGN_CHI(CHI1b_R1, CHI1p_R1, FALSE) = CHI1p_R1</pre>	
Detailed comments :	

The Test Suite Operation Definition shown in table 3 is used in the Constraints Part when assigning an element of type CHI a value. The CHI type can be defined in two ways depending on whether the ATS is testing Basic or Primary-rate access. To avoid duplicate types and thereby duplicate test cases this operation is used to assign a value to an element of CHI type. It takes three parameters:

```
primary:      a constraint of type CHI valid for primary rate access;
basic:        a constraint of type CHI valid for basic access;
basic_flag:   a Boolean value: TRUE if basic access is applicable, FALSE otherwise.
```

This operation returns the correct constraint according to the Boolean flag basic_flag. That constraint will then be assigned to the specific element of type CHI.

7.2 Constraints part

7.2.1 Structured type constraint declaration

For every structured type definition there exists one or more structured type constraint.

7.2.2 ASN.1 type constraint declaration

There are no ASN.1 type constraint declarations in the ATS.

7.2.3 ASP type constraint declaration

7.2.3.1 ASN.1 ASP type constraint declaration

There are no ASN.1 ASP type constraint declarations in the ATS.

7.2.3.2 TTCN ASP type constraint declaration

The PDUs to be sent or received are passed to the TTCN ASP constraint declarations Ms and Mr as parameters of meta type PDU. Only if values inside a specific PDU have to be referenced, the use of the meta type PDU is not allowed according to ISO/IEC 9646-3 [13]. In such cases different TTCN ASP constraint declarations are used, which are defined to carry only a specific type of PDU (e.g. SETUP). Table 4 shows an example of such a TTCN ASP constraint declaration.

Table 4: TTCN ASP constraint declaration Sr

TTCN ASP Constraint Declaration		
Constraint Name	: Sr(PARAM: SETUP_PDU)	
ASP Type	: DL_DAT_IN_SETUP	
Derivation Path	:	
Comments	: ASP to indicate the receipt of SETUP messages.	
Parameter Name	Parameter Value	Comments
mun	PARAM	
Detailed Comments :		

All ASP constraints have a specific value for its parameter. No matching symbols are used in ASP constraints.

7.2.4 PDU type constraint declaration

7.2.4.1 ASN.1 PDU type constraint declaration

There are no ASN.1 PDU type constraint declarations in the ATS.

7.2.4.2 TTCN PDU type constraint declaration

PDU constraints are used for assigning values or patterns to the data being sent or received.

7.2.5 Derived constraints

Derived constraints are used in the ATS for PDUs only.

7.2.6 Parameterized constraints

Parameterized constraints are used in the ATS.

7.2.7 Value assignment

7.2.7.1 Specific values

For specific value assignment both explicit values and references to explicit values are used.

7.2.7.2 Matching values

As matching values the following mechanisms are used:

Instead of value:

AnyOrOmit "*"

AnyValue "?"

SuperSet SUPERSET

Omit "-"

Inside value:

AnyOne "?"

AnyOrNone "*"

7.3 Dynamic part

7.3.1 Test cases

Each test case contains:

- as purpose, a united text of the test;
- as comment, the relevant references to EN 300 267-1 [5];
- as description, the references to the included test purposes in the corresponding combined test purpose from EN 300 267-3 [7];
- as behaviour description, at least a main tree for the MTC. Depending on the reference point which is tested and the purpose of the test, one or two test steps specify the behaviour in the B-channels. Test steps that describe B-channel behaviour are started only to check requirements at the S/T reference point and are created only for an IUT that supports requirements at this reference point.

7.3.2 Test steps

Much use has been made of test steps to avoid needless repetition of dynamic behaviour.

Behaviour description for the B-channel always employs test steps so that if the tester does not implement B-channel testing, those test steps could easily be ignored.

7.3.3 Defaults

Note the use of the RETURN statement which is defined in ISO/IEC 9646-3 [13]. This allows valid background behaviour to be handled in the default tree with a possibility to return to the original set of alternatives in the test case.

7.3.4 Synchronization

If a PTC does not finish after an extra long timer, the MTC stops all active PTCs by sending a STOP_PTC message. These co-ordination messages are captured by the PTCs in their default trees.

The MTC waits for co-ordination messages from PTCB1 to create PTCB2's tree. MTCB1 expects, before starting its postamble to release channel(s), a co-ordination message from the PTCB1 to tell it that it has ended.

The PTCs and MTC need to exchange co-ordination messages for functional reasons. PTCB1 cannot expand the communication on both channels until MTCB1 has established the call for the additional channel.

8 ATS to TP map

The identifiers used for the combined TPs are reused as test case names. Thus there is a straightforward one-to-one mapping.

9 PCTR conformance

A test laboratory, when requested by a client to produce a PCTR, is required, as specified in ISO/IEC 9646-5 [15], to produce a PCTR conformant with the PCTR template given in annex B of ISO/IEC 9646-5 [15].

Furthermore, a test laboratory, offering testing for the ATS specification contained in annex C, when requested by a client to produce a PCTR, is required to produce a PCTR conformant with the PCTR proforma contained in annex A of the present document.

A PCTR which conforms to this PCTR proforma specification shall preserve the content and ordering of the clauses contained in annex A. Clause A.6 of the PCTR may contain additional columns. If included, these shall be placed to the right of the existing columns. Text in italics may be retained by the test laboratory.

10 PIXIT conformance

A test realizer, producing an executable test suite for the ATS specification contained in annex C, is required, as specified in ISO/IEC 9646-4 [14], to produce an augmented partial PIXIT proforma conformant with this partial PIXIT proforma specification.

An augmented partial PIXIT proforma which conforms to this partial PIXIT proforma specification shall, as a minimum, have contents which are technically equivalent to annex B. The augmented partial PIXIT proforma may contain additional questions that need to be answered in order to prepare the Means Of Testing (MOT) for a particular IUT.

A test laboratory, offering testing for the ATS specification contained in annex C, is required, as specified in ISO/IEC 9646-5 [15], to further augment the augmented partial PIXIT proforma to produce a PIXIT proforma conformant with this partial PIXIT proforma specification.

A PIXIT proforma which conforms to this partial PIXIT proforma specification shall, as a minimum, have contents which are technically equivalent to annex B. The PIXIT proforma may contain additional questions that need to be answered in order to prepare the test laboratory for a particular IUT.

11 ATS conformance

The test realizer, producing MOT and ExTS for this ATS specification, shall comply with the requirements of ISO/IEC 9646-4 [14]. In particular, these concern the realization of an ExTS based on each ATS. The test realizer shall provide a statement of conformance of the MOT to this ATS specification.

An ExTS which conforms to this ATS specification shall contain test groups and test cases which are technically equivalent to those contained in the ATS in annex C. All sequences of test events comprising an abstract test case shall be capable of being realized in the executable test case. Any further checking which the test system might be capable of performing is outside the scope of this ATS specification and shall not contribute to the verdict assignment for each test case.

Test laboratories running conformance test services using this ATS shall comply with ISO/IEC 9646-5 [15].

A test laboratory which claims to conform to this ATS specification shall use an MOT which conforms to this ATS.

Annex A (normative): Protocol Conformance Test Report (PCTR) proforma

Notwithstanding the provisions of the copyright clause related to the text of the present document, ETSI grants that users of the present document may freely reproduce the PCTR proforma in this annex so that it can be used for its intended purposes and may further publish the completed PCTR.

A.1 Identification summary

A.1.1 Protocol conformance test report

PCTR number:	
PCTR date:	
Corresponding SCTR number:	
Corresponding SCTR date:	
Test laboratory identification:	
Test laboratory manager:	
Signature:	

A.1.2 IUT identification

Name:	
Version:	
Protocol specification:	EN 300 267-1
PICS:	
Previous PCTRs (if any):	

A.1.3 Testing environment

PIXIT reference number:	
ATS specification:	EN 300 267-4
Abstract test method:	Remote multi-party test method (see ISO/IEC 9646-2)
Means of testing identification:	
Dates of testing:	
Conformance log reference(s):	
Retention date for log reference(s):	

A.1.4 Limits and reservations

Additional information relevant to the technical contents or further use of the test report, or to the rights and obligations of the test laboratory and the client, may be given here. Such information may include restriction on the publication of the report.

.....

.....

.....

.....

A.1.5 Comments

Additional comments may be given by either the client or the test laboratory on any of the contents of the PCTR, for example, to note disagreement between the two parties.

.....

.....

.....

.....

A.2 IUT Conformance status

This IUT has/has not been shown by conformance assessment to be non-conforming to the specified protocol specification.

Strike the appropriate words in this sentence. If the PICS for this IUT is consistent with the static conformance requirements (as specified in clause A.3 of this report) and there are no "FAIL" verdicts to be recorded (in clause A.6) strike the words "has", otherwise strike the words "has not".

A.3 Static conformance summary

The PICS for this IUT is/is not consistent with the static conformance requirements in the specified protocol.

Strike the appropriate words in this sentence.

A.4 Dynamic conformance summary

The test campaign did / did not reveal errors in the IUT.

Strike the appropriate words in this sentence. If there are no "FAIL" verdicts to be recorded (in clause A.6 of this report) strike the word "did", otherwise strike the words "did not".

Summary of the results of groups of tests:

.....
.....
.....
.....
.....

A.5 Static conformance review report

If clause A.3 indicates non-conformance, this clause itemizes the mismatches between the PICS and the static conformance requirements of the specified protocol specification.

.....
.....
.....
.....
.....
.....

A.6 Test campaign report

ATS reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
CT111_01				
CT111_02				
CT111_03				
CT111_04				
CT111_05				
CT111_06				
CT111_07				
CT111_08				
CT111_09				
CT111_10				
CT111_11				
CT111_12				
CT112_01				
CT112_02				
CT112_03				
CT113_01				
CT113_02				
CT211_01				
CT211_03				
CT211_04				
CT211_06				
CT212_01				
CV111_01				
CV111_02				
CV111_03				
CV111_04				
CV111_05				
CV111_06				
CV111_07				
CV111_08				
CV111_09				
CV111_10				
CV111_11				
CV111_12				
CV111_13				
CV111_14				
CV111_15				
CV112_01				
CV112_02				
CV112_03				
CV113_01				
CV113_02				
CV113_03				
CV113_04				
CV113_05				
CV113_07				
CV113_08				
CV211_01				
CV211_02				
CV211_03				
CV211_07				
CV211_08				
CV211_10				
CV211_11				
CV211_12				
CV212_01				
CV213_01				
CV213_02				

ATS reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
CA111_01				
CA111_02				
CA111_03				
CA111_04				
CA111_05				
CA111_06				
CA111_07				
CA111_08				
CA111_09				
CA111_10				
CA111_11				
CA111_12				
CA111_13				
CA112_01				
CA112_02				
CA112_03				
CA113_01				
CA113_02				
CA113_03				
CA113_04				
CA113_06				
CA211_01				
CA211_02				
CA211_03				
CA211_07				
CA211_08				
CA211_10				
CA211_11				
CA211_12				
CA212_01				
CA213_01				
CA213_02				
CC111_01				
CC111_02				
CC111_03				
CC111_04				
CC111_05				
CC111_06				
CC111_07				
CC111_08				
CC111_09				
CC111_10				
CC111_11				
CC111_12				
CC111_13				
CC112_01				
CC112_02				
CC112_03				
CC113_01				
CC113_02				
CC113_03				
CC113_04				
CC113_06				
CC211_01				
CC211_02				
CC211_03				
CC211_07				
CC211_08				
CC211_10				
CC211_11				
CC211_12				
CC212_01				

Annex B (normative): Partial PIXIT proforma

Notwithstanding the provisions of the copyright clause related to the text of the present document, ETSI grants that users of the present document may freely reproduce the PIXIT proforma in this annex so that it can be used for its intended purposes and may further publish the completed PIXIT.

B.1 Identification summary

PIXIT number:

.....

Test laboratory name:

.....

Date of issue:

.....

Issued to:

.....

B.2 Abstract test suite summary

Protocol specification: EN 300 267-1.

ATS specification: EN 300 267-4.

Abstract test method: Remote multi-party test method (see ISO/IEC 9646-2).

B.3 Test laboratory

Test laboratory identification:

.....

Accreditation status of the test service:

.....

Accreditation reference:

.....

Test laboratory manager:

.....

Test laboratory contact:

.....

Means of testing:

.....

Test laboratory instructions for completion:

.....

B.4 Client (of the test laboratory)

Client identification:

.....

Client test manager:

.....

Client contact:

.....

Test facilities required:

.....

B.5 System Under Test (SUT)

Name:

.....

Version:

.....

SCS reference:

.....

Machine configuration:

.....

Operating system identification:

.....

IUT identification:

.....

PICS (all layers):

.....

.....

Limitations of the SUT:

.....

Environmental conditions:

.....

B.6 Protocol information

B.6.1 Protocol identification

Specification reference: EN 300 267-1.

Protocol version:

PICS reference:

NOTE: The PICS references should reference a completed PICS which is conformant with the PICS proforma contained in EN 300 267-2 and the PICS proforma contained in EN 300 403-3.

B.6.2 Configuration to be tested

Table B.1: Configuration to be tested

Item	Configuration	Supported) (Y/N)
1.1	Does the IUT send a RESTART message after the re-establishment of the multiple frame operation ?	
1.2	Does the IUT initiate the release of the multiple frame established operation after entering U00 ?	

B.6.3 Actions required to stimulate IUT

Table B.2: Configuration options

Item	Configuration: What actions, if possible, have to be taken to configure the IUT to ...	Supported? (Y/N)	Stimulus (action taken)
2.1	send a fallback not allowed SETUP message?		
2.2	fallback to 3,1 kHz teleservice at S/T reference point on receipt of a 7 kHz fallback allowed SETUP message (this point will correspond to an outside point for a private ISDN)?		
2.3	fallback to 3,1 kHz teleservice at S/T reference point on receipt of a videotelephony, audiographic conference or videoconference fallback allowed SETUP message (this point will correspond to an outside point for a private ISDN)?		
2.4	fallback to 7 kHz teleservice at S/T reference point on receipt of a videotelephony, audiographic conference or videoconference fallback allowed SETUP message (this point will correspond to an outside point for a private ISDN)?		
2.5	fallback to 3,1 kHz teleservice inside itself (N/A for non private ISDN) on receipt of a 7 kHz fallback allowed SETUP message?		
2.6	fallback to 3,1 kHz teleservice inside itself (N/A for non private ISDN) on receipt of a videotelephony, audiographic conference or videoconference fallback allowed SETUP message?		

B.6.4 Test management timers

Table B.3: Timer values

Item	Timer values: Give a value for the timer that is used to ...	Value (in seconds)
3.1	control test events initiated by the test operator	
3.2	control test events initiated by stimuli sent by the tester	
3.3	control the inactivity of the IUT	
3.4	wait for RESTART messages after establishment of the multiple frame operation (if 1.1 is supported)	

B.6.5 Parameter values

Table B.4: Parameter values

Item	Parameter values: Give a ...	Allowed values	Value
4.1	value for the supported length of the call reference value	BA: 1 PRA: 2	
4.2	coding of a Called party number information element, which the IUT is compatible with	N/A	
4.3	value for the preferred channel number (used in Channel identification information element) to be used for incoming calls	BA: 1..2 PRA: 1..30	
4.4	value for the preferred channel number (used in Channel identification information element) to be used for a second incoming call on the same CES when two B-channel call is supported	BA: 1..2 PRA: 1..30	

Annex C (normative): Abstract Test Suite (ATS)

This ATS has been produced using the Tree and Tabular Combined Notation (TTCN) according to ISO/IEC 9646-3.

The ATS was developed on a separate TTCN software tool and therefore the TTCN tables are not completely referenced in the table of contents. The ATS itself contains a test suite overview part which provides additional information and references (see annex D).

C.1 The TTCN Graphical form (TTCN.GR)

The TTCN.GR representation of this ATS is contained in an Adobe Portable Document Format™ file (td060.PDF contained in archive en_30026704v010204p0.ZIP) which accompanies the present document.

C.2 The TTCN Machine Processable form (TTCN.MP)

The TTCN.MP representation corresponding to this ATS is contained in an ASCII file (td059.MP contained in archive en_30026704v010204p0.ZIP) which accompanies the present document.

Annex D (informative): General structure of ATS

This annex gives a simple listing of the order of types of tables which appear in a typical supplementary service ATS. This is intended as an aid in helping readers find particular sections quickly.

Test Suite Overview

Test Suite Structure

Test Case Index

Test Step Index

Default Index

Declarations Part

Simple Type Definitions

Structured Type Definitions

ASN.1 Type Definitions

Test Suite Operation Definitions

Test Suite Parameter Declarations

Test Case Selection Expression Definitions

Test Suite Constant Declarations

Test Case Variable Declarations

PCO Declarations

Co-ordination Point Declarations

Timer Declarations

Test Component Declarations

Test Components Configuration Declarations

TTCN ASP Type Definition

TTCN PDU Type Definition

TTCN CM Type Definition

Alias Definitions

Constraints Part

Structured Type Constraint Declarations

ASN.1 Type Constraint Declarations

TTCN ASP Constraint Declarations

TTCN PDU Constraint Declarations

TTCN CM Constraint Declarations

Dynamic Part

Test Case Dynamic Behaviour

Test Step Dynamic Behaviour

Default Dynamic Behaviour

History

Document history		
Edition 1	April 1999	Publication as ETS 300 267-4
V1.2.4	August 1999	Public Enquiry PE 9955: 1999-08-18 to 1999-12-17
V1.2.4	March 2000	Vote V 20000526: 2000-03-27 to 2000-05-26
V1.2.4	June 2000	Publication