

ETSI TS 103 326 V1.2.1 (2021-07)



**Smart Body Area Network (SmartBAN);
Enhanced Ultra-Low Power Physical Layer**

Reference

RTS/SmartBAN-0017

Keywords

air interface, health, protocol

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2021.
All rights reserved.

Contents

Intellectual Property Rights	4
Foreword.....	4
Modal verbs terminology.....	4
1 Scope	5
2 References	5
2.1 Normative references	5
2.2 Informative references.....	5
3 Definition of terms, symbols and abbreviations.....	5
3.1 Terms.....	5
3.2 Symbols.....	6
3.3 Abbreviations	6
4 Introduction and Background.....	6
5 General PHY Framework.....	6
5.0 Introduction	6
5.1 Frequency Spectrum.....	6
6 Packet Formats	7
6.1 PPDU.....	7
6.1.0 PPDU Structure	7
6.1.1 Preamble	7
6.1.2 Sync.....	7
6.1.3 PLCP Header	7
6.1.3.0 PLCP Header Structure	7
6.1.3.1 Packet Length.....	8
6.1.3.2 PHY Scheme.....	8
6.1.3.3 BCH Parity Bits	8
6.1.3.4 Header Parity.....	8
6.1.4 PSDU	8
6.1.5 Frame Parity.....	8
7 Modulation and Error Control.....	8
7.1 PPDU Formation	8
7.2 Modulation	9
7.3 Repetition and FEC	9
7.3.1 Repetition.....	9
7.3.2 BCH (127,113, $t=2$) Encoding.....	10
7.3.3 BCH (36, 22, $t=2$) Encoding	10
7.4 Scrambling	10
8 Other Requirements.....	11
8.1 Packet Length.....	11
8.2 CCA.....	12
Annex A (informative): Bibliography.....	13
History	14

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Smart Body Area Network (SmartBAN).

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

1 Scope

The present document specifies the ultra-low power physical layer (PHY) SmartBAN.

The present document applies to short range, wireless communication between wearable sensors devices and the hub coordinator. The present document specifies the PHY for transmitting on the medium.

The present document describes:

- packet formats;
- modulation;
- forward error correction.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] ETSI TS 103 325 (V1.1.1) (04-2015): "Smart Body Area Network (SmartBAN); Low Complexity Medium Access Control (MAC) for SmartBAN".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the reference document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

Not applicable.

3 Definition of terms, symbols and abbreviations

3.1 Terms

Void.

3.2 Symbols

For the purposes of the present document, the following symbols apply:

D	Delay
⊕	eXclusive OR (XOR)

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

BAN	Body Area Network
BCH	Bose–Chaudhuri–Hocquenghem
CCA	Clear Channel Assessment
CRC	Cyclic Redundancy Check
ED	Energy Detection
FEC	Forward Error Correction
GFSK	Gaussian Frequency Shift Keying
IFS	Inter-Frame Spacing
ISM	Industrial, Scientific and Medical
MAC	Medium Access Control
MPDU	MAC Protocol Data Unit
PHY	Physical Layer
PLCP	Physical Layer Convergence Protocol
PPDU	PHY Protocol Data Unit
PSDU	Physical layer Service Data Unit
Sync.	Synchronization

4 Introduction and Background

Modern medical and health monitoring equipment are moving towards the trend of wireless connectivity between the data collection or control centre and the medical devices or sensors. Therefore, the need for a standardized communication interface and protocol between the actors are required. This network of actors performing some medical monitoring or functions is called a Smart Body Area Network (SmartBAN).

The present document specifies the physical layer procedure for SmartBAN.

5 General PHY Framework

5.0 Introduction

This clause provides the basic PHY framework for the nodes and hubs.

5.1 Frequency Spectrum

The frequency of operation shall fall within 2 401 - 2 481 MHz. The channels shall be arranged in blocks of 2 MHz with centre frequencies:

$$f_c = 2\,402 + 2 \times n \text{ MHz, for } n = 0 \text{ to } 39 \quad (1)$$

where n is the channel number.

Table 1 shows the mapping of the channel number to data channel number and control channel number.

Table 1: Mapping of Channel Number to Data and Control Channel Numbers


Channel Number	Centre Frequency (MHz)	Channel Type	Data Channel Number	Control Channel Number
0	2 402	Control		0
1	2 404	Data	0	
...		Data		
11	2 424	Data	10	
12	2 426	Control		1
13	2 428	Data	11	
...		Data		
38	2 478	Data	36	
39	2 480	Control		2

6 Packet Formats

6.1 PPDU

6.1.0 PPDU Structure

Figure 1 shows the PPDU structure. The PPDU consists of Preamble, Synchronization (Sync.), PLCP Header, PSDU and Frame Parity.

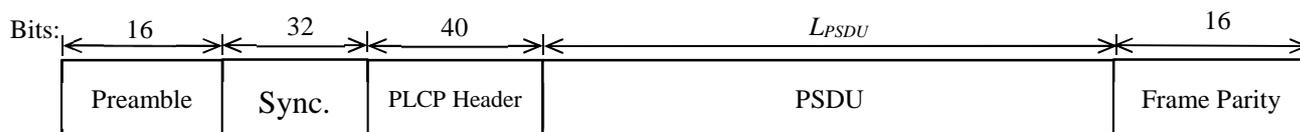**Figure 1: PPDU Structure**

6.1.1 Preamble

PPDUs have a sixteen-bit preamble used for frequency synchronization, timing synchronization, and automatic gain control.

The preamble for all PPDUs shall be 1010101010101010.

6.1.2 Sync.

The Sync. field indicates the synchronization pattern that shall be 10000111101100101000011110110010.

6.1.3 PLCP Header

6.1.3.0 PLCP Header Structure

The PLCP Header is structured as illustrated in Figure 2. The PLCP header consists of the Packet Length, PHY Scheme, Reserved, BCH Parity Bits, and the Header Parity fields.

The PLCP header may be scrambled by the procedure described in clause 7.4.

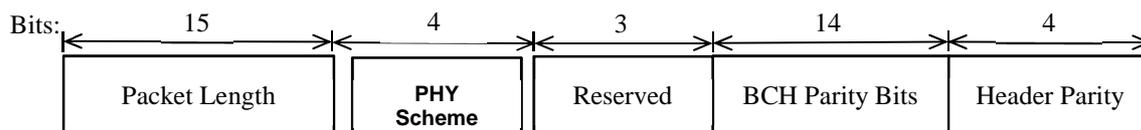


Figure 2: PLCP Header Structure

6.1.3.1 Packet Length

The packet length field indicates the length of the PSDU.

6.1.3.2 PHY Scheme

The PHY Scheme field describes the Forward Error Control (FEC) type and the repetition type the PPDU employs. The mapping of the field bits is as described in Table 2.

6.1.3.3 BCH Parity Bits

The BCH Parity Bits field is generated using a BCH (36, 22, $t = 2$) code defined in clause 7.3.3 to protect the Packet Length, PHY Scheme, and Reserved fields.

6.1.3.4 Header Parity

The Header Parity field is generated by the CRC polynomial $1 + x + x^4$ on the Packet Length, PHY Scheme, Reserved, and BCH Parity Bits fields.

Table 2: PHY Scheme field bit mapping

Field Value b0 b1	FEC Type
00	None
01	BCH (127, 113, 2)
10	Reserved
11	Reserved

Field Value b2 b3	Repetition Type
00	None
01	2
10	4
11	Reserved

6.1.4 PSDU

The Physical Layer Service Data Unit (PSDU) is either an encoded or uncoded MAC Protocol Data Unit (MPDU) as defined in clause 6.1 of ETSI TS 103 325 [1]. The MPDU may be encoded using a BCH (127, 113, $t = 2$) code. The encoding procedure is described in clause 7.3. The PSDU may be scrambled using the procedure described in clause 7.4.

6.1.5 Frame Parity

The Frame Parity field shall contain a 16 bit CRC sequence of the PSDU generated using the generator polynomial:

$$x^{16} + x^{12} + x^5 + 1 \quad (2)$$

7 Modulation and Error Control

7.1 PPDU Formation

The PPDU is formed from the following process described in Figure 3. The dashed boxes represent optional support.

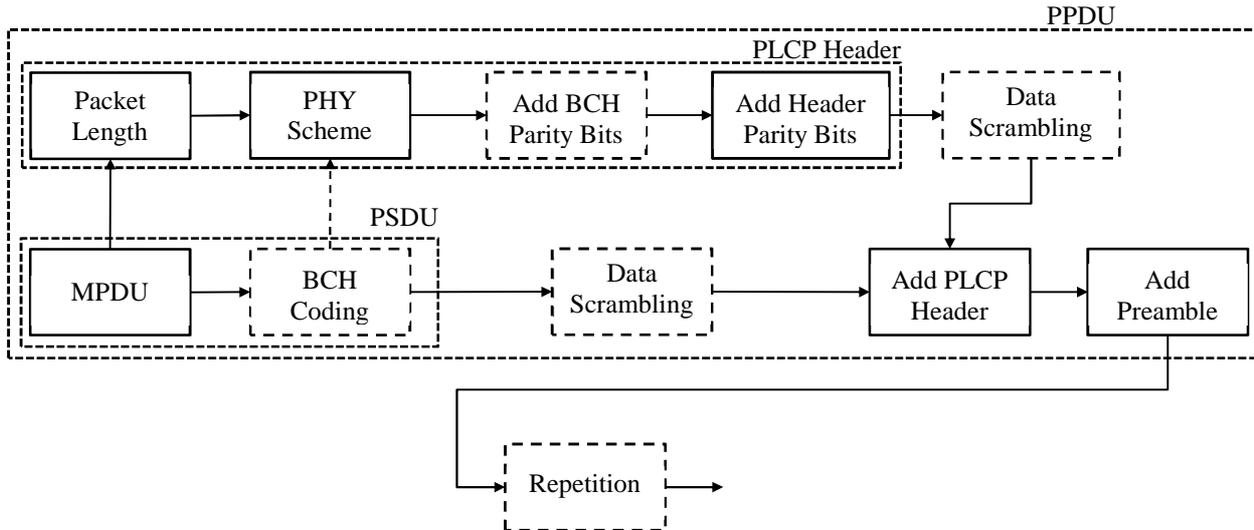


Figure 3: Transmitter Physical Layer Chain

7.2 Modulation

The modulation is Gaussian Frequency Shift Keying (GFSK) with a time-bandwidth product (BT) $BT = 0,5$, and modulation index $h = 0,5$.

A symbol rate, T_{sym} , of 1 MSymbols/s shall be supported in both Control and Data Channels. Table 3 shows the possible information rate according to the combination of symbol rate, code rate and the number of repetitions.

Table 3: PHY Throughput

Channel (Data/Control)	Information Flow	Symbol Rate (MSymbols/s)	Code Rate	Repetition	Information Rate (Mbps)
Data/Control	Downlink/Uplink	1,0	1	1	1,0
Data/Control	Downlink/Uplink	1,0	1	2	0,5
Data/Control	Downlink/Uplink	1,0	1	4	0,25
Data/Control	Downlink/Uplink	1,0	113/127	1	0,89
Data/Control	Downlink/Uplink	1,0	113/127	2	0,44
Data/Control	Downlink/Uplink	1,0	113/127	4	0,22

7.3 Repetition and FEC

7.3.1 Repetition

The hubs and nodes may implement repetition coding to reduce errors if required. Should repetition coding be implemented, this should be indicated in the PHY Scheme field in clause 6.1.3.4. Two repetition schemes should be supported, 2-repetition, repeating the entire PPDU 2 times, and 4-repetition, repeating the entire PPDU 4 times.

When repetition is employed, the original PPDU along with its repeated versions should be treated as one single PPDU.

An example of 2-repetition and 4-repetition is shown in Figure 4.

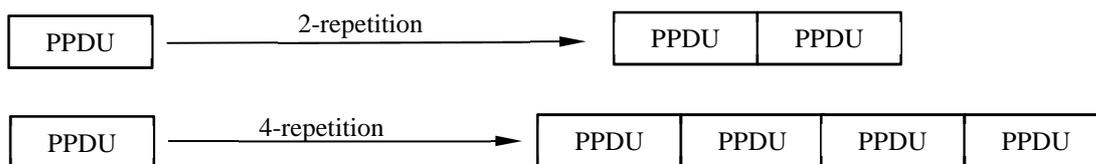


Figure 4: An example of 2-repetition and 4-repetition

7.3.2 BCH (127, 113, $t = 2$) Encoding

For error correction control of MPDU, a systematic BCH (127, 113, $t = 2$) code may be employed. t indicates the maximum number of bits that can be corrected. The generator polynomial of the BCH (127, 113, $t = 2$) code is:

$$g(x) = x^{14} + x^9 + x^8 + x^6 + x^5 + x^4 + x^2 + x + 1. \quad (3)$$

The encoding process is as follows:

- 1) Calculate the number of padding bits, $N_{padding}$. The number of padding bits depends on the length of the MPDU, L_{MPDU} , and can be calculated as:

$$N_{padding} = \left\lceil \frac{L_{MPDU}}{k} \right\rceil \times k - L_{MPDU} \quad (4)$$

where $k = 113$

- 2) Append $N_{padding}$ zero bits to the end of the MPDU.
- 3) Partition the padded MPDU into subpackets with length of k .
- 4) Compute the parity bits for each subpackets using the generator polynomial $g(x)$.
- 5) Remove $N_{padding}$ bits from the last subpacket.
- 6) Append the parity bits generated for each subpacket to each subpacket.
- 7) Reassemble the expanded subpackets in the same order they were dissembled to produce the PSDU.

7.3.3 BCH (36, 22, $t=2$) Encoding

For error correction control of the Packet Length, PHY Scheme, and Reserved fields of the PLCP header, a systematic BCH (36, 22, $t = 2$) code should be employed. The BCH code is a shortened code derived from the primitive BCH (127, 113, $t = 2$) described in clause 7.3.2. The encoding process is as follows:

- 1) Set $N_{padding} = 91$.
- 2) Append $N_{padding}$ zero bits to the end of the Packet Length, PHY Scheme, and Reserved fields, the resulting 113 bits are treated as a subpacket in clause 7.3.2.
- 3) Compute the parity bits for the subpacket using the generator polynomial $g(x)$ in equation (3),
- 4) Remove $N_{padding}$ bits from the subpacket.
- 5) Append the generated parity bits to the subpacket.

7.4 Scrambling

A data scrambler may be supported when necessary. The scrambling sequence is generated by the scrambling polynomial is $1 + x^{14} + x^{15}$, with an initial state of 000100100001010. The output of the data scrambler is:

$$x[n] = x[n-14] \oplus x[n-15] \quad (5)$$

Figure 5 shows an implementation of the data scrambler. D denotes the delay operation.

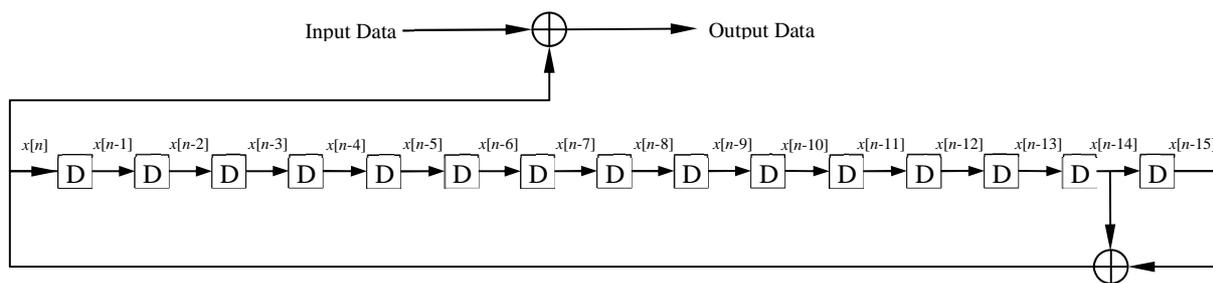


Figure 5: Data scrambler

8 Other Requirements

8.1 Packet Length

In this clause, the maximum permitted length of PPDU and MPDU are calculated.

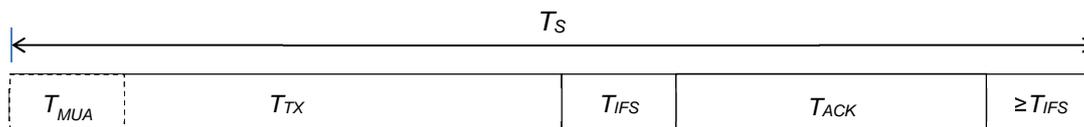


Figure 6: Channel Access Slot Structure

Each time slot is partitioned into 2 transmission phases (T_{TX} and T_{ACK}) and 2 or more transition phases. The time allocated to the initial transmission phase is dependent on several factors:

- Time for transmitting the Acknowledgement frame.
- Inter-Frame Spacing.
- Channel Access Mode.
- PHY Scheme.

The time for transmitting the Acknowledgement frame is:

$$T_{ACK} = (L_{preamble} + L_{PLCPheader} + L_{header} + L_{parity})/R_{sym} \quad (6)$$

where $L_{preamble}$, $L_{PLCPheader}$, L_{header} , L_{parity} and R_{sym} are the length (in bits) of the PHY preamble, PLCP header, MAC header, MAC parity field, and the symbol rate respectively.

Therefore, the maximum permissible time for the initial transmission phase is:

$$T_{TX,max} = (T_S - T_{MUA} - T_{ACK} - 2 \times T_{IFS})/N_{rep} \quad (7)$$

where N_{rep} is the number of time the PPDU is repeated, as indicated in PHY Scheme field in the PLCP Header. T_{MUA} is the sensing time in the Multi-use Access mode. For Scheduled and Slotted Aloha channel access modes, $T_{MUA} = 0$. Consequently, the maximum length (in bits) of the PSDU is:

$$L_{PSDU,max} = T_{TX,max} \times R_{sym} - (L_{preamble} + L_{PLCPheader}) \quad (8)$$

In the case where no BCH encoding is employed, $L_{PSDU,max} = L_{MPDU,max}$. When BCH(n, k) encoding is employed, the maximum length of the MPDU is:

$$L_{MPDU,max} = \lfloor L_{PSDU,max}/n \rfloor \times k + \kappa \quad (9)$$

where:

$$\kappa = \begin{cases} (L_{PSDU,max} \% n) - (n - k); & \text{if } (L_{PSDU,max} \% n) > (n - k), \\ 0; & \text{if } (L_{PSDU,max} \% n) < (n - k). \end{cases}$$

Hence, the maximum length of the MAC Frame Body, $L_{F,max}$ is:

$$L_{F,max} = L_{MPDU} - L_{header} - L_{parity} \quad (10)$$

8.2 CCA

The PHY should provide the capability to perform Clear Channel Assessment (CCA) in devices which support the Multi-use Access Channel Access mode according to at least one of the following three methods:

- 1) CCA Mode 1: Energy above the threshold. CCA should report a busy medium upon detecting any energy above the Energy Detection (ED) threshold.
- 2) CCA Mode 2: Carrier sense only. CCA should report a busy medium only upon the detection of a signal compliant with the present document. This signal may be above or below the ED threshold. The CCA detection time shall be $\leq T_{MUA}$.
- 3) CCA Mode 3: Carrier sense with energy above the threshold. CCA should report a busy medium using a logical combination of the following:
 - a) detection of a signal with the modulation and characteristics of the PHY that is currently in use by the device; and
 - b) energy above the ED threshold, where the logical operator may be AND or OR.

The CCA parameters are subject to the following criteria:

- The ED threshold should be -75 dBm.
- The CCA detection time should be $\leq T_{MUA}$. Any CCA procedures required by local regulatory requirements should also be supported.

Annex A (informative): Bibliography

- ETSI EN 300 328-1 (V1.3.1) (12-2001): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Wideband Transmission systems; Data transmission equipment operating in the 2,4 GHz ISM band and using spread spectrum modulation techniques; Part 1: Technical characteristics and test conditions".
- ETSI TS 103 129 (V1.1.2) (03-2014): "Digital Video Broadcasting (DVB); Framing structure, channel coding and modulation of a carrier identification system (DVB-CID) for satellite transmission".

History

Document history		
V1.1.1	April 2015	Publication
V1.2.1	July 2021	Publication