

ETSI TS 125 215 V6.0.0 (2003-12)

Technical Specification

**Universal Mobile Telecommunications System (UMTS);
Physical layer;
Measurements (FDD)
(3GPP TS 25.215 version 6.0.0 Release 6)**



Reference

RTS/TSGR-0125215v600

Keywords

UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, send your comment to:

editor@etsi.org

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2003.
All rights reserved.

DECTTM, **PLUGTESTS**TM and **UMTS**TM are Trade Marks of ETSI registered for the benefit of its Members.
TIPHONTM and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPPTM is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Contents

| | |
|---|-----------|
| Intellectual Property Rights | 2 |
| Foreword..... | 2 |
| Foreword..... | 4 |
| 1 Scope | 5 |
| 2 References | 5 |
| 3 Definitions and Abbreviations..... | 6 |
| 3.1 Definitions | 6 |
| 3.2 Abbreviations | 6 |
| 4 Control of UE/UTRAN measurements | 6 |
| 5 Measurement abilities for UTRA FDD | 7 |
| 5.1 UE measurement abilities..... | 7 |
| 5.1.1 CPICH RSCP | 7 |
| 5.1.2 PCCPCH RSCP | 7 |
| 5.1.3 UTRA carrier RSSI..... | 8 |
| 5.1.4 GSM carrier RSSI..... | 8 |
| 5.1.5 CPICH Ec/No | 8 |
| 5.1.6 Transport channel BLER | 8 |
| 5.1.7 UE transmitted power | 9 |
| 5.1.8 SFN-CFN observed time difference | 9 |
| 5.1.9 SFN-SFN observed time difference..... | 9 |
| 5.1.10 UE Rx-Tx time difference | 10 |
| 5.1.11 Observed time difference to GSM cell | 10 |
| 5.1.12 UE GPS Timing of Cell Frames for UE positioning..... | 10 |
| 5.1.13 UE GPS code phase | 10 |
| 5.2 UTRAN measurement abilities | 10 |
| 5.2.1 Received total wide band power | 11 |
| 5.2.2 SIR | 11 |
| 5.2.3 SIR _{error} | 11 |
| 5.2.4 Transmitted carrier power..... | 12 |
| 5.2.5 Transmitted code power..... | 12 |
| 5.2.6 Transport channel BER..... | 12 |
| 5.2.7 Physical channel BER..... | 12 |
| 5.2.8 Round trip time | 12 |
| 5.2.9 UTRAN GPS Timing of Cell Frames for UE positioning | 13 |
| 5.2.10 PRACH/PCPCH Propagation delay | 13 |
| 5.2.11 Acknowledged PRACH preambles..... | 13 |
| 5.2.12 Detected PCPCH access preambles | 13 |
| 5.2.13 Acknowledged PCPCH access preambles | 13 |
| 5.2.14 SFN-SFN observed time difference..... | 14 |
| 5.2.15 Transmitted carrier power of all codes not used for HS-PDSCH or HS-SCCH transmission | 14 |
| 6 Measurements for UTRA FDD | 14 |
| 6.1 UE measurements..... | 14 |
| 6.1.1 Compressed mode..... | 14 |
| 6.1.1.1 Use of compressed mode for monitoring | 14 |
| 6.1.1.2 Parameterisation of the compressed mode | 15 |
| Annex A (informative): Change history | 17 |
| History | 19 |

Foreword

This Technical Specification (TS) has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document contains the description and definition of the measurements for FDD done at the UE and network in order to support operation in idle mode and connected mode.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TS 25.211: "Physical channels and mapping of transport channels onto physical channels (FDD)".
- [2] 3GPP TS 25.212: "Multiplexing and channel coding (FDD)".
- [3] 3GPP TS 25.213: "Spreading and modulation (FDD)".
- [4] 3GPP TS 25.214: "Physical layer procedures (FDD)".
- [5] 3GPP TS 25.215: "Physical layer - Measurements (FDD)".
- [6] 3GPP TS 25.221: "Physical channels and mapping of transport channels onto physical channels (TDD)".
- [7] 3GPP TS 25.222: "Multiplexing and channel coding (TDD)".
- [8] 3GPP TS 25.223: "Spreading and modulation (TDD)".
- [9] 3GPP TS 25.224: "Physical layer procedures (TDD)".
- [10] 3GPP TS 25.301: "Radio Interface Protocol Architecture".
- [11] 3GPP TS 25.302: "Services provided by the Physical layer".
- [12] 3GPP TS 25.303: "UE functions and interlayer procedures in connected mode".
- [13] 3GPP TS 25.304: "UE procedures in idle mode".
- [14] 3GPP TS 25.331: "RRC Protocol Specification".
- [15] 3GPP TR 25.922: "Radio Resource Management Strategies".
- [16] 3GPP TR 25.923: "Report on Location Services (LCS)".
- [17] 3GPP TR 25.401: "UTRAN Overall Description".
- [18] 3GPP TS 25.101: "UE Radio transmission and Reception (FDD)".
- [19] 3GPP TS 25.104: "UTRA (BS) FDD; Radio transmission and Reception".
- [20] 3GPP TS 25.133: " Requirements for Support of Radio Resource Management (FDD)"
- [21] 3GPP TS 25.225: " Physical layer – Measurements (TDD)".

3 Definitions and Abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply.

cell portion: A geographical part of a cell for which a Node B measurement can be reported to the RNC. A cell portion is semi-static, and identical for both the UL and the DL. Within a cell, a cell portion is uniquely identified by a cell portion ID.

Note 1: a cell portion is not necessarily analogous to actual beams used for transmission and/or reception of e.g. a DPCH at the Node B.

Note 2: RNC may associate physical channels with cell portions.

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

| | |
|-------|---|
| BER | Bit Error Rate |
| BLER | Block Error Rate |
| Ec/No | Received energy per chip divided by the power density in the band |
| ISCP | Interference Signal Code Power |
| RL | Radio Link |
| RSCP | Received Signal Code Power |
| RSSI | Received Signal Strength Indicator |
| SIR | Signal to Interference Ratio |

4 Control of UE/UTRAN measurements

In this chapter the general measurement control concept of the higher layers is briefly described to provide an understanding on how L1 measurements are initiated and controlled by higher layers.

L1 provides with the measurement specifications a toolbox of measurement abilities for the UE and the UTRAN. These measurements can be differentiated in different reported measurement types: intra-frequency, inter-frequency, inter-system, traffic volume, quality and UE internal measurements (see [14]).

In the L1 measurement specifications the measurements, see chapter 5, are distinguished between measurements in the UE (the messages will be described in the RRC Protocol) and measurements in the UTRAN (the messages will be described in the NBAP and the Frame Protocol).

To initiate a specific measurement the UTRAN transmits a 'measurement control message' to the UE including a measurement ID and type, a command (setup, modify, release), the measurement objects and quantity, the reporting quantities, criteria (periodical/event-triggered) and mode (acknowledged/unacknowledged), see [14].

When the reporting criteria is fulfilled the UE shall answer with a 'measurement report message' to the UTRAN including the measurement ID and the results.

In idle mode the measurement control message is broadcast in a System Information.

Intra-frequency reporting events, traffic volume reporting events and UE internal measurement reporting events described in [14] define events which trigger the UE to send a report to the UTRAN. This defines a toolbox from which the UTRAN can choose the needed reporting events.

5 Measurement abilities for UTRA FDD

In this chapter the physical layer measurements reported to higher layers are defined. The GSM measurements are required only from the GSM capable terminals. The TDD measurements are required only from the terminals that are capable to operate in TDD mode.

5.1 UE measurement abilities

The structure of the table defining a UE measurement quantity is shown below.

| Column field | Comment |
|-----------------------|---|
| Definition | Contains the definition of the measurement. |
| Applicable for | States in which RRC state according to [14] a measurement shall be possible to perform. For RRC connected mode states information is also given on the possibility to perform the measurement on intra-frequency and/or inter-frequency. The following terms are used in the tables: Idle = Shall be possible to perform in idle mode; URA_PCH = Shall be possible to perform in URA_PCH; CELL_PCH = Shall be possible to perform in CELL_PCH; CELL_FACH = Shall be possible to perform in CELL_FACH; CELL_DCH = Shall be possible to perform in CELL_DCH; For all RRC connected mode states i.e. URA_PCH, CELL_PCH, CELL_FACH and CELL_DCH Intra appended to the RRC state = Shall be possible to perform in the corresponding RRC state on an intra-frequency cell; Inter appended to the RRC state = Shall be possible to perform in the corresponding RRC state on an inter-frequency cell. Inter-RAT appended to the RRC state = Shall be possible to perform in the corresponding RRC state on an inter-RAT cell. |

The term "antenna connector of the UE" used in this sub-clause to define the reference point for the UE measurements is defined in [18]. Performance and reporting requirements for the UE measurements are defined in [20].

5.1.1 CPICH RSCP

| | |
|-----------------------|---|
| Definition | Received Signal Code Power, the received power on one code measured on the Primary CPICH. The reference point for the RSCP shall be the antenna connector of the UE. If Tx diversity is applied on the Primary CPICH the received code power from each antenna shall be separately measured and summed together in [W] to a total received code power on the Primary CPICH. |
| Applicable for | Idle, URA_PCH intra, URA_PCH inter, CELL_PCH intra, CELL_PCH inter, CELL_FACH intra, CELL_FACH inter, CELL_DCH intra, CELL_DCH inter |

5.1.2 PCCPCH RSCP

| | |
|-----------------------|--|
| Definition | Received Signal Code Power, the received power on one code measured on the PCCPCH from a TDD cell. The reference point for the RSCP shall be the antenna connector of the UE. See [21] for further details on this measurement. |
| Applicable for | Idle, URA_PCH inter, CELL_PCH inter, CELL_FACH inter, CELL_DCH inter |

5.1.3 UTRA carrier RSSI

| | |
|-----------------------|---|
| Definition | The received wide band power, including thermal noise and noise generated in the receiver, within the bandwidth defined by the receiver pulse shaping filter. The reference point for the measurement shall be the antenna connector of the UE. |
| Applicable for | CELL_DCH intra, CELL_DCH inter |

5.1.4 GSM carrier RSSI

| | |
|-----------------------|--|
| Definition | Received Signal Strength Indicator, the wide-band received power within the relevant channel bandwidth. Measurement shall be performed on a GSM BCCH carrier. The reference point for the RSSI shall be the antenna connector of the UE. |
| Applicable for | Idle, URA_PCH inter-RAT CELL_PCH inter-RAT CELL_FACH inter-RAT CELL_DCH inter-RAT |

5.1.5 CPICH Ec/No

| | |
|-----------------------|---|
| Definition | The received energy per chip divided by the power density in the band. The CPICH Ec/No is identical to CPICH RSCP/UTRA Carrier RSSI. Measurement shall be performed on the Primary CPICH. The reference point for the CPICH Ec/No shall be the antenna connector of the UE. If Tx diversity is applied on the Primary CPICH the received energy per chip (Ec) from each antenna shall be separately measured and summed together in [Ws] to a total received chip energy per chip on the Primary CPICH, before calculating the Ec/No. |
| Applicable for | Idle, URA_PCH intra, URA_PCH inter, CELL_PCH intra, CELL_PCH inter, CELL_FACH intra, CELL_FACH inter, CELL_DCH intra, CELL_DCH inter |

5.1.6 Transport channel BLER

| | |
|-----------------------|---|
| Definition | <p>Estimation of the transport channel block error rate (BLER). The BLER estimation shall be based on evaluating the CRC of each transport block associated with the measured transport channel after RL combination. The BLER shall be computed over the measurement period as the ratio between the number of received transport blocks resulting in a CRC error and the number of received transport blocks.</p> <p>When either TFCI or guided detection is used, the measurement "Transport channel BLER" may only be requested for a transport channel when the associated CRC size is non zero and at least one transport format in the associated transport format set includes at least one transport block.</p> <p>When neither TFCI nor guided detection is used, the measurement "Transport channel BLER" may only be requested for a transport channel when the associated CRC size is non zero and all transport formats in the associated transport format set include at least one transport block.</p> <p>The measurement "Transport channel BLER" does not apply to transport channels mapped on a P-CCPCH and a S-CCPCH. The UE shall be able to perform the measurement "Transport channel BLER" on any transport channel configured such that the measurement "Transport channel BLER" can be requested as defined in this section.</p> |
| Applicable for | CELL_DCH intra |

5.1.7 UE transmitted power

| | |
|-----------------------|---|
| Definition | The total UE transmitted power on one carrier. The reference point for the UE transmitted power shall be the antenna connector of the UE. |
| Applicable for | CCELL_FACH intra, CELL_DCH intra |

5.1.8 SFN-CFN observed time difference

| | |
|-----------------------|---|
| Definition | <p>The SFN-CFN observed time difference to cell is defined as: $OFF \times 38400 + T_m$, where:</p> <p>$T_m = (T_{UE\text{Tx}} - T_0) - T_{Rx\text{SFN}}$, given in chip units with the range [0, 1, ..., 38399] chips</p> <p>$T_{UE\text{Tx}}$ is the time when the UE transmits an uplink DPCCCH/DPDCH frame.</p> <p>T_0 is defined in [1].</p> <p>$T_{Rx\text{SFN}}$ is the time at the beginning of the neighbouring P-CCPCH frame received most recent in time before the time instant $T_{UE\text{Tx}} - T_0$ in the UE. If the beginning of the neighbouring P-CCPCH frame is received exactly at $T_{UE\text{Tx}} - T_0$ then $T_{Rx\text{SFN}} = T_{UE\text{Tx}} - T_0$ (which leads to $T_m = 0$).</p> <p>and</p> <p>$OFF = (SFN - CFN_{Tx}) \bmod 256$, given in number of frames with the range [0, 1, ..., 255] frames</p> <p>CFN_{Tx} is the connection frame number for the UE transmission of an uplink DPCCCH/DPDCH frame at the time $T_{UE\text{Tx}}$.</p> <p>SFN is the system frame number for the neighbouring P-CCPCH frame received in the UE at the time $T_{Rx\text{SFN}}$.</p> <p>The reference point for the SFN-CFN observed time difference shall be the antenna connector of the UE.</p> <p>In case the inter-frequency measurement is done with compressed mode, the UE is not required to read the cell SFN of the target inter-frequency neighbour cell and the value for the parameter OFF is always reported to be 0.</p> <p>In case that the SFN measurement indicator indicates that the UE does not need to read cell SFN of the target neighbour cell, the value of the parameter OFF is always be set to 0.</p> |
| Applicable for | CELL_DCH intra, CELL_DCH inter |

5.1.9 SFN-SFN observed time difference

| | |
|-----------------------|--|
| Definition | <p>Type 1:</p> <p>The SFN-SFN observed time difference to cell is defined as: $OFF \times 38400 + T_m$, where:</p> <p>$T_m = T_{Rx\text{SFN}_j} - T_{Rx\text{SFN}_i}$, given in chip units with the range [0, 1, ..., 38399] chips</p> <p>$T_{Rx\text{SFN}_j}$ is the time at the beginning of a received neighbouring P-CCPCH frame from cell j.</p> <p>$T_{Rx\text{SFN}_i}$ is time at the beginning of the neighbouring P-CCPCH frame from cell i received most recent in time before the time instant $T_{Rx\text{SFN}_j}$ in the UE. If the next neighbouring P-CCPCH frame is received exactly at $T_{Rx\text{SFN}_j}$ then $T_{Rx\text{SFN}_j} = T_{Rx\text{SFN}_i}$ (which leads to $T_m = 0$).</p> <p>and</p> <p>$OFF = (SFN_j - SFN_i) \bmod 256$, given in number of frames with the range [0, 1, ..., 255] frames</p> <p>SFN_j is the system frame number for downlink P-CCPCH frame from cell j in the UE at the time $T_{Rx\text{SFN}_j}$.</p> <p>SFN_i is the system frame number for the P-CCPCH frame from cell i received in the UE at the time $T_{Rx\text{SFN}_i}$.</p> <p>The reference point for the SFN-SFN observed time difference type 1 shall be the antenna connector of the UE.</p> <p>Type 2:</p> <p>The relative timing difference between cell j and cell i, defined as $T_{CPICH\text{R}_j} - T_{CPICH\text{R}_i}$, where:</p> <p>$T_{CPICH\text{R}_j}$ is the time when the UE receives one Primary CPICH slot from cell j</p> <p>$T_{CPICH\text{R}_i}$ is the time when the UE receives the Primary CPICH slot from cell i that is closest in time to the Primary CPICH slot received from cell j.</p> <p>The reference point for the SFN-SFN observed time difference type 2 shall be the antenna connector of the UE.</p> |
| Applicable for | <p>Type 1: Idle, URA_PCH intra, CELL_PCH intra, CELL_FACH intra</p> <p>Type 2:</p> <p>URA_PCH intra, URA_PCH inter, CELL_PCH intra, CELL_PCH inter, CELL_FACH intra, CELL_FACH inter CELL_DCH intra, CELL_DCH inter</p> |

5.1.10 UE Rx-Tx time difference

| | |
|-----------------------|---|
| Definition | The difference in time between the UE uplink DPCCH/DPDCH frame transmission and the first detected path (in time), of the downlink DPCH frame from the measured radio link. Type 1 and Type 2 are defined. For Type 1, the reference Rx path shall be the first detected path (in time) amongst the paths (from the measured radio link) used in the demodulation process. For Type 2, the reference Rx path shall be the first detected path (in time) amongst all paths (from the measured radio link) detected by the UE. The reference path used for the measurement may therefore be different for Type 1 and Type 2. The reference point for the UE Rx-Tx time difference shall be the antenna connector of the UE. Measurement shall be made for each cell included in the active set. |
| Applicable for | CELL_DCH intra |

5.1.11 Observed time difference to GSM cell

| | |
|-----------------------|---|
| Definition | <p>The Observed time difference to GSM cell is defined as: $T_{RxGSMj} - T_{RxSFNi}$, where:</p> <p>T_{RxSFNi} is the time at the beginning of the P-CCPCH frame with SFN=0 from cell i. Cell i is an intra-frequency cell.</p> <p>T_{RxGSMj} is the time at the beginning of the GSM BCCH 51-multiframe from GSM frequency j received closest in time after the time T_{RxSFNi}. If the next GSM multiframe is received exactly at T_{RxSFNi} then $T_{RxGSMj} = T_{RxSFNi}$ (which leads to $T_{RxGSMj} - T_{RxSFNi} = 0$). The reference point for the Observed time difference to GSM cell shall be the antenna connector of the UE.</p> <p>The beginning of the GSM BCCH 51-multiframe is defined as the beginning of the first tail bit of the frequency correction burst in the first TDMA-frame of the GSM BCCH 51-multiframe, i.e. the TDMA-frame following the IDLE-frame.</p> <p>The reported time difference is calculated from the actual measurement in the UE. The actual measurement shall be based on:</p> <p>$T_{MeasGSM,j}$: The start of the first tail bit of the most recently received GSM SCH on frequency j</p> <p>$T_{MeasSFN,i}$: The start of the last P-CCPCH frame received from cell i before receiving the GSM SCH on frequency j</p> <p>For calculating the reported time difference, the frame lengths are always assumed to be 10 ms for UTRA and (60/13) ms for GSM.</p> |
| Applicable for | Idle, URA_PCH inter-RAT, CELL_PCH inter-RAT, CELL_DCH inter-RAT |

5.1.12 UE GPS Timing of Cell Frames for UE positioning

| | |
|-----------------------|---|
| Definition | The timing between cell j and GPS Time Of Week. $T_{UE-GPSj}$ is defined as the time of occurrence of a specified UTRAN event according to GPS time. The specified UTRAN event is the beginning of a particular frame (identified through its SFN) in the first detected path (in time) of the cell j CPICH, where cell j is a cell chosen by the UE. The reference point for $T_{UE-GPSj}$ shall be the antenna connector of the UE. |
| Applicable for | CELL_FACH intra, CELL_DCH intra |

5.1.13 UE GPS code phase

| | |
|-----------------------|--|
| Definition | The whole and fractional phase of the spreading code of the i^{th} GPS satellite signal. The reference point for the GPS code phase shall be the antenna connector of the UE. |
| Applicable for | Void (this measurement is not related to UTRAN/GSM signals; its applicability is therefore independent of the UE RRC state) |

5.2 UTRAN measurement abilities

The structure of the table defining a UTRAN measurement quantity is shown below.

| Column field | Comment |
|--------------|---|
| Definition | Contains the definition of the measurement. |

The term "antenna connector" used in this sub-clause to define the reference point for the UTRAN measurements refers to the "BS antenna connector" test port A and test port B as described in [19]. The term "antenna connector" refers to Rx or Tx antenna connector as described in the respective measurement definitions.

5.2.1 Received total wide band power

| | |
|-------------------|--|
| Definition | The received wide band power, including noise generated in the receiver, within the bandwidth defined by the receiver pulse shaping filter. The reference point for the measurement shall be the Rx antenna connector. In case of receiver diversity the reported value shall be linear average of the power in the diversity branches. When cell portions are defined in the cell, the total received wideband power shall be measured for each cell portion. |
|-------------------|--|

5.2.2 SIR

| | |
|-------------------|---|
| Definition | <p>Type 1: Signal to Interference Ratio, is defined as: $(RSCP/ISCP) \times SF$. The measurement shall be performed on the DPCCH of a Radio Link Set. In compressed mode the SIR shall not be measured in the transmission gap. The reference point for the SIR measurements shall be the Rx antenna connector. If the radio link set contains more than one radio link, the reported value shall be the linear summation of the SIR from each radio link of the radio link set. If Rx diversity is used in the Node B for a cell, the SIR for a radio link shall be the linear summation of the SIR from each Rx antenna for that radio link. When cell portions are defined in the cell, the SIR measurement shall be possible in each cell portion.</p> <p>where:</p> <p>RSCP = Received Signal Code Power, unbiased measurement of the received power on one code. ISCP = Interference Signal Code Power, the interference on the received signal. SF=The spreading factor used on the DPCCH.</p> <p>Type 2: Signal to Interference Ratio, is defined as: $(RSCP/ISCP) \times SF$. The measurement shall be performed on the PRACH control part. The reference point for the SIR measurements shall be the Rx antenna connector. When cell portions are defined in the cell, the SIR measurement shall be possible in each cell portion.</p> <p>where:</p> <p>RSCP = Received Signal Code Power, unbiased measurement of the received power on the code. ISCP = Interference Signal Code Power, the interference on the received signal. SF=The spreading factor used on the control part of the PRACH.</p> |
|-------------------|---|

5.2.3 SIR_{error}

| | |
|-------------------|--|
| Definition | <p>$SIR_{error} = SIR - SIR_{target_ave}$, where:</p> <p>SIR = the SIR measured by UTRAN, defined in section 5.2, given in dB.</p> <p>SIR_{target_ave} = the SIR_{target} averaged over the same time period as the SIR used in the SIR_{error} calculation. In compressed mode $SIR_{target} = SIR_{cm_target}$ shall be used when calculating SIR_{target_ave}. In compressed mode the SIR_{target_ave} shall not be calculated over the transmission gap. The averaging of SIR_{target} shall be made in a linear scale and SIR_{target_ave} shall be given in dB.</p> |
|-------------------|--|

5.2.4 Transmitted carrier power

| | |
|-------------------|--|
| Definition | Transmitted carrier power, is the ratio between the total transmitted power on one DL carrier from one UTRAN access point, and the maximum transmission power possible to use on that DL carrier at this moment of time. Total transmission power is the mean power [W] on one carrier from one UTRAN access point. Maximum transmission power is the mean power [W] on one carrier from one UTRAN access point when transmitting at the configured maximum power for the cell. Measurement shall be possible on any carrier transmitted from the UTRAN access point. The reference point for the transmitted carrier power measurement shall be the Tx antenna connector. In case of Tx diversity the transmitted carrier power is the ratio between the sum of the total transmitted powers of all branches and the maximum transmission power. When cell portions are defined in the cell, the transmitted carrier power for each cell portion shall be measured and reported to higher layers. |
|-------------------|--|

5.2.5 Transmitted code power

| | |
|-------------------|---|
| Definition | Transmitted code power, is the transmitted power on one channelisation code on one given scrambling code on one given carrier. Measurement shall be possible on the DPCCH-field of any dedicated radio link transmitted from the UTRAN access point and shall reflect the power on the pilot bits of the DPCCH-field. When measuring the transmitted code power in compressed mode all slots shall be included in the measurement, e.g. also the slots in the transmission gap shall be included in the measurement. The reference point for the transmitted code power measurement shall be the Tx antenna connector. In case of Tx diversity the transmitted code power for each branch shall be measured and summed together in [W]. |
|-------------------|---|

5.2.6 Transport channel BER

| | |
|-------------------|--|
| Definition | The transport channel BER is an estimation of the average bit error rate (BER) of the DPDCH data of a Radio Link Set. The transport channel (TrCH) BER is measured from the data considering only non-punctured bits at the input of the channel decoder in Node B. It shall be possible to report an estimate of the transport channel BER for a TrCH after the end of each TTI of the TrCH. The reported TrCH BER shall be an estimate of the BER during the latest TTI for that TrCH. |
|-------------------|--|

5.2.7 Physical channel BER

| | |
|-------------------|--|
| Definition | The Physical channel BER is an estimation of the average bit error rate (BER) on the DPCCH of a Radio Link Set. An estimate of the Physical channel BER shall be possible to be reported after the end of each TTI of any of the transferred TrCHs. The reported physical channel BER shall be an estimate of the BER averaged over the latest TTI of the respective TrCH. |
|-------------------|--|

5.2.8 Round trip time

| | |
|-------------------|---|
| Definition | Round trip time (RTT), is defined as $RTT = T_{RX} - T_{TX}$, where T_{TX} = The time of transmission of the beginning of a downlink DPCH frame to a UE. The reference point for T_{TX} shall be the Tx antenna connector. T_{RX} = The time of reception of the beginning (the first detected path, in time) of the corresponding uplink DPCCH/DPDCH frame from the UE. The reference point for T_{RX} shall be the Rx antenna connector. Measurement shall be possible on DPCH for each RL transmitted from an UTRAN access point and DPDCH/DPCCH for each RL received in the same UTRAN access point. |
|-------------------|---|

5.2.9 UTRAN GPS Timing of Cell Frames for UE positioning

| | |
|-------------------|---|
| Definition | $T_{\text{UTRAN-GPS}}$ is defined as the time of the occurrence of a specified UTRAN event according to GPS Time Of Week. The specified UTRAN event is the beginning of the transmission of a particular frame in the cell. The reference point for $T_{\text{UTRAN-GPS}}$ shall be the Tx antenna connector. |
|-------------------|---|

5.2.10 PRACH/PCPCH Propagation delay

| | |
|-------------------|---|
| Definition | <p>Propagation delay is defined as one-way propagation delay as measured during either PRACH or PCPCH access:</p> <p><u>PRACH :</u></p> <p>Propagation delay = $(T_{\text{RX}} - T_{\text{TX}} - 2560)/2$, where: T_{TX} = The transmission time of AICH access slot (n-2-AICH transmission timing), where $0 \leq (n-2-\text{AICH Transmission Timing}) \leq 14$ and AICH_Transmission_Timing can have values 0 or 1. The reference point for T_{TX} shall be the Tx antenna connector. T_{RX} = The time of reception of the beginning (the first detected path, in time) of the PRACH message from the UE at PRACH access slot n. The reference point for T_{RX} shall be the Rx antenna connector.</p> <p><u>PCPCH:</u></p> <p>Propagation delay = $(T_{\text{RX}} - T_{\text{TX}} - (L_{\text{pc-preamble}} + 1) * 2560 - (k-1) * 38400)/2$, where T_{TX} = The transmission time of CD-ICH at access slot (n-2-T_{cpch}), where $0 \leq (n-2-T_{\text{cpch}}) \leq 14$ and T_{cpch} can have values 0 or 1. The reference point for T_{TX} shall be the Tx antenna connector. T_{RX} = The time of reception of the first chip (the first detected path, in time) of the kth frame of the PCPCH message from the UE, where $k \in \{1, 2, \dots, N_{\text{Max_frames}}\}$. The reference point for T_{RX} shall be the Rx antenna connector. $N_{\text{max_frames}}$ is a higher layer parameter and defines the maximum length of the PCPCH message. The PCPCH message begins at uplink access slot $(n + L_{\text{pc-preamble}}/2)$, where $0 \leq (n + L_{\text{pc-preamble}}/2) \leq 14$ and where $L_{\text{pc-preamble}}$ can have values 0 or 8.</p> |
|-------------------|---|

5.2.11 Acknowledged PRACH preambles

| | |
|-------------------|--|
| Definition | The Acknowledged PRACH preambles measurement is defined as the total number of acknowledged PRACH preambles per access frame per PRACH. This is equivalent to the number of positive acquisition indicators transmitted per access frame per AICH. |
|-------------------|--|

5.2.12 Detected PCPCH access preambles

| | |
|-------------------|---|
| Definition | The detected PCPCH access preambles measurement is defined as the total number of detected access preambles per access frame on the PCPCHs belonging to a CPCH set. |
|-------------------|---|

5.2.13 Acknowledged PCPCH access preambles

| | |
|-------------------|--|
| Definition | The Acknowledged PCPCH access preambles measurement is defined as the total number of acknowledged PCPCH access preambles per access frame on the PCPCHs belonging to a SF. This is equivalent to the number of positive acquisition indicators transmitted for a SF per access frame per AP-AICH. |
|-------------------|--|

5.2.14 SFN-SFN observed time difference

| | |
|-------------------|--|
| Definition | <p>The relative timing difference between cell j and cell i, defined as $T_{\text{CPICHRxj}} - T_{\text{CPICHRx_i}}$, where:</p> <p>$T_{\text{CPICHRxj}}$ is the time when the LMU receives the beginning of one Primary CPICH frame from cell j and</p> <p>$T_{\text{CPICHRx_i}}$ is the time when the LMU receives the beginning of the Primary CPICH frame from cell i that is closest in time to the beginning of Primary CPICH frame received from cell j.</p> <p>The reference point for the measurements shall be the Rx antenna connector.</p> |
|-------------------|--|

5.2.15 Transmitted carrier power of all codes not used for HS-PDSCH or HS-SCCH transmission

| | |
|-------------------|--|
| Definition | <p>Transmitted carrier power of all codes not used for HS-PDSCH or HS-SCCH transmission is the ratio between the total transmitted power of all codes not used for HS-PDSCH or HS-SCCH transmission on one DL carrier from one UTRAN access point, and the maximum transmission power possible to use on that DL carrier at this moment of time. Total transmission power of all codes not used for HS-PDSCH or HS-SCCH transmission is the mean power [W] of all codes not used for HS-PDSCH or HS-SCCH transmission on one carrier from one UTRAN access point. Maximum transmission power is the mean power [W] on one carrier from one UTRAN access point when transmitting at the configured maximum power for the cell. The measurement shall be possible on any carrier transmitted from the UTRAN access point. The reference point for the transmitted carrier power measurement of all codes not used for HS-PDSCH or HS-SCCH transmission shall be the Tx antenna connector. In case of Tx diversity the transmitted carrier power of all codes not used for HS-PDSCH or HS-SCCH transmission is the ratio between the sum of the total transmitted powers of all codes not used for HS-PDSCH or HS-SCCH transmission of all branches and the maximum transmission power. When cell portions are defined in the cell, the transmitted carrier power of all codes not used for HS-PDSCH or HS-SCCH transmission for each cell portion shall be measured and reported to higher layers.</p> |
|-------------------|--|

6 Measurements for UTRA FDD

6.1 UE measurements

6.1.1 Compressed mode

6.1.1.1 Use of compressed mode for monitoring

On command from the UTRAN, a UE shall monitor cells on other FDD frequencies and on other modes and radio access technologies that are supported by the UE (i.e. TDD, GSM). To allow the UE to perform measurements, UTRAN shall command that the UE enters in compressed mode, depending on the UE capabilities.

The UE capabilities define whether a UE requires compressed mode in order to monitor cells on other FDD frequencies and on other modes and radio access technologies. UE capabilities indicate the need for compressed mode separately for the uplink and downlink and for each mode, radio access technology and frequency band.

A UE shall support compressed mode for all cases for which the UE indicates that compressed mode is required.

A UE does not need to support compressed mode for cases for which the UE indicates that compressed mode is not required. For these cases, the UE shall support an alternative means of making the measurements.

The UE shall support one single measurement purpose for one transmission gap pattern sequence. The measurement purpose of the transmission gap pattern sequence is signalled by higher layers.

The following subclause provides rules to parameterise the compressed mode.

6.1.1.2 Parameterisation of the compressed mode

In response to a request from higher layers, the UTRAN shall signal to the UE the compressed mode parameters.

A transmission gap pattern sequence consists of alternating transmission gap patterns 1 and 2, each of these patterns in turn consists of one or two transmission gaps. See figure 1.

The following parameters characterise a transmission gap pattern:

- TGSN (Transmission Gap Starting Slot Number): A transmission gap pattern begins in a radio frame, henceforward called first radio frame of the transmission gap pattern, containing at least one transmission gap slot. TGSN is the slot number of the first transmission gap slot within the first radio frame of the transmission gap pattern;
- TGL1 (Transmission Gap Length 1): This is the duration of the first transmission gap within the transmission gap pattern, expressed in number of slots;
- TGL2 (Transmission Gap Length 2): This is the duration of the second transmission gap within the transmission gap pattern, expressed in number of slots. If this parameter is not explicitly set by higher layers, then $TGL2 = TGL1$;
- TGD (Transmission Gap start Distance): This is the duration between the starting slots of two consecutive transmission gaps within a transmission gap pattern, expressed in number of slots. The resulting position of the second transmission gap within its radio frame(s) shall comply with the limitations of [2]. If this parameter is not set by higher layers, then there is only one transmission gap in the transmission gap pattern;
- TGPL1 (Transmission Gap Pattern Length): This is the duration of transmission gap pattern 1, expressed in number of frames;
- TGPL2 (Transmission Gap Pattern Length): This is the duration of transmission gap pattern 2, expressed in number of frames. If this parameter is not explicitly set by higher layers, then $TGPL2 = TGPL1$.

The following parameters control the transmission gap pattern sequence start and repetition:

- TGPRC (Transmission Gap Pattern Repetition Count): This is the number of transmission gap patterns within the transmission gap pattern sequence;
- TGCFN (Transmission Gap Connection Frame Number): This is the CFN of the first radio frame of the first pattern 1 within the transmission gap pattern sequence.

In addition to the parameters defining the positions of transmission gaps, each transmission gap pattern sequence is characterised by:

- UL/DL compressed mode selection: This parameter specifies whether compressed mode is used in UL only, DL only or both UL and DL;
- UL compressed mode method: The methods for generating the uplink compressed mode gap are spreading factor division by two or higher layer scheduling and are described in [2];
- DL compressed mode method: The methods for generating the downlink compressed mode gap are puncturing, spreading factor division by two or higher layer scheduling and are described in [2];
- downlink frame type: This parameter defines if frame structure type 'A' or 'B' shall be used in downlink compressed mode. The frame structures are defined in [2];
- scrambling code change: This parameter indicates whether the alternative scrambling code is used for compressed mode method 'SF/2'. Alternative scrambling codes are described in [3];
- RPP: Recovery Period Power control mode specifies the uplink power control algorithm applied during recovery period after each transmission gap in compressed mode. RPP can take 2 values (0 or 1). The different power control modes are described in [4];
- ITP: Initial Transmit Power mode selects the uplink power control method to calculate the initial transmit power after the gap. ITP can take two values (0 or 1) and is described in [4].

The UE shall support simultaneous compressed mode pattern sequences which can be used for different measurements. The following measurement purposes can be signalled from higher layers:

- FDD
- TDD
- GSM carrier RSSI measurement
- Initial BSIC identification
- BSIC re-confirmation.

The UE shall support one compressed mode pattern sequence for each measurement purpose while operating in FDD mode, assuming the UE needs compressed mode to perform the respective measurement. In case the UE supports several of the measurement purposes, it shall support in parallel one compressed mode pattern sequence for each supported measurement purpose where the UE needs compressed mode to perform the measurement. The capability of the UE to operate in compressed mode in uplink and downlink is given from the UE capabilities.

The GSM measurements Initial BSIC identification and BSIC re-confirmation are defined in [20].

Higher layers will ensure that the compressed mode gaps do not overlap and are not scheduled to overlap the same frame. The behaviour when an overlap occurs is described in [11]. UE is not required to support two compressed mode gaps in a frame.

In all cases, higher layers have control of individual UE parameters. Any pattern sequence can be stopped on higher layers' command.

The parameters TGSN, TGL1, TGL2, TGD, TGPL1, TGPL2, TGPRC and TGCFN shall all be integers.

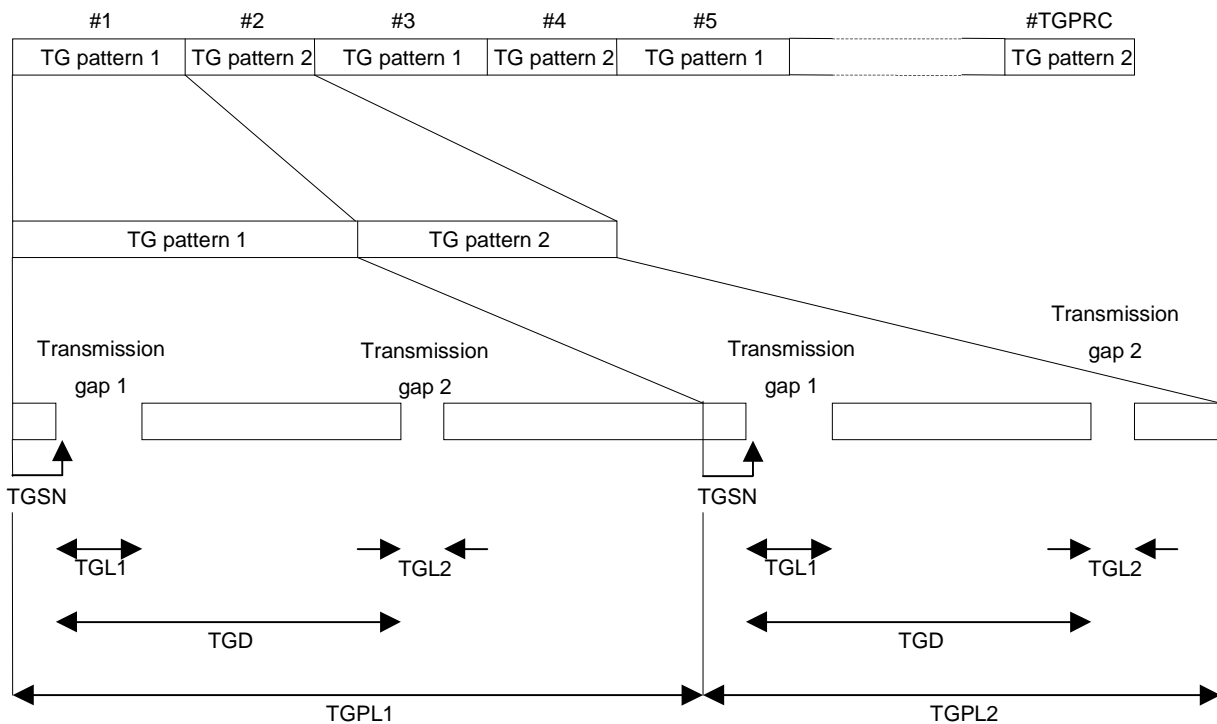


Figure 1: Illustration of compressed mode pattern parameters

Annex A (informative): Change history

| Change history | | | | | | | |
|----------------|--------|-----------|-----|-----|--|-------|-------|
| Date | TSG # | TSG Doc. | CR | Rev | Subject/Comment | Old | New |
| 14/01/00 | RAN_05 | RP-99590 | - | | Approved at TSG RAN #5 and placed under Change Control | - | 3.0.0 |
| 14/01/00 | RAN_06 | RP-99688 | 001 | 3 | Clarifications for compressed mode parameters | 3.0.0 | 3.1.0 |
| 14/01/00 | RAN_06 | RP-99689 | 002 | - | Definition of PCCPCH RSCP | 3.0.0 | 3.1.0 |
| 14/01/00 | RAN_06 | RP-99689 | 003 | - | Definition of observed time difference to GSM cell | 3.0.0 | 3.1.0 |
| 14/01/00 | RAN_06 | RP-99688 | 004 | - | Measurements are done on Primary CPICH | 3.0.0 | 3.1.0 |
| 14/01/00 | RAN_06 | RP-99689 | 005 | 1 | Physical channel BER on DPCCCH | 3.0.0 | 3.1.0 |
| 14/01/00 | RAN_06 | RP-99688 | 006 | - | Definition of SIR measurement | 3.0.0 | 3.1.0 |
| 14/01/00 | RAN_06 | RP-99689 | 007 | 2 | Ranges and resolution of timing measurements | 3.0.0 | 3.1.0 |
| 14/01/00 | RAN_06 | RP-99688 | 009 | 2 | Range and resolution for RF related measurements | 3.0.0 | 3.1.0 |
| 14/01/00 | RAN_06 | RP-99689 | 010 | 2 | New subclauses: 5.1.15 - UE GPS Timing of Cell Frames for LCS; 5.2.8 UTRAN GPS Timing of Cell Frames for LCS | 3.0.0 | 3.1.0 |
| 14/01/00 | RAN_06 | RP-99688 | 011 | - | Removal of Annex A from TS 25.215 | 3.0.0 | 3.1.0 |
| 14/01/00 | RAN_06 | RP-99688 | 013 | - | Definition of Transmitted code power | 3.0.0 | 3.1.0 |
| 14/01/00 | RAN_06 | RP-99688 | 014 | 2 | Range and resolution of BLER measurements | 3.0.0 | 3.1.0 |
| 14/01/00 | RAN_06 | RP-99688 | 015 | 2 | Range and resolution of BER measurements | 3.0.0 | 3.1.0 |
| 14/01/00 | RAN_06 | RP-99688 | 020 | - | Correction of SFN-SFN observed time difference | 3.0.0 | 3.1.0 |
| 14/01/00 | RAN_06 | RP-99688 | 021 | 1 | CFN-SFN measurement with compressed mode | 3.0.0 | 3.1.0 |
| 14/01/00 | - | - | - | - | Change history was added by the editor | 3.1.0 | 3.1.1 |
| 31/03/00 | RAN_07 | RP-000066 | 024 | 1 | Definition of Transmitted carrier power | 3.1.1 | 3.2.0 |
| 31/03/00 | RAN_07 | RP-000066 | 025 | - | Clarification of Observed time difference to GSM cell | 3.1.1 | 3.2.0 |
| 31/03/00 | RAN_07 | RP-000066 | 027 | - | Naming of BER/BLER mapping | 3.1.1 | 3.2.0 |
| 31/03/00 | RAN_07 | RP-000066 | 028 | - | Minor corrections in TS 25.215 | 3.1.1 | 3.2.0 |
| 31/03/00 | RAN_07 | RP-000066 | 029 | - | Re-definition of timing measurements | 3.1.1 | 3.2.0 |
| 31/03/00 | RAN_07 | RP-000066 | 030 | 2 | Mapping of timing measurements | 3.1.1 | 3.2.0 |
| 31/03/00 | RAN_07 | RP-000066 | 031 | - | Removal of note in Round trip time measurement | 3.1.1 | 3.2.0 |
| 31/03/00 | RAN_07 | RP-000066 | 033 | - | Removal of fixed gap position in 25.215 | 3.1.1 | 3.2.0 |
| 31/03/00 | RAN_07 | RP-000066 | 036 | 4 | Corrections to 25.215 compressed mode parameter list | 3.1.1 | 3.2.0 |
| 31/03/00 | RAN_07 | RP-000066 | 037 | 3 | Definition and range of physical channel BER | 3.1.1 | 3.2.0 |
| 31/03/00 | RAN_07 | RP-000066 | 040 | - | Clarification of CPICH measurements in Tx diversity | 3.1.1 | 3.2.0 |
| 31/03/00 | RAN_07 | RP-000066 | 042 | 1 | UTRAN RSSI measurement | 3.1.1 | 3.2.0 |
| 31/03/00 | RAN_07 | RP-000066 | 043 | 1 | UTRAN Propagation delay | 3.1.1 | 3.2.0 |
| 31/03/00 | RAN_07 | RP-000066 | 044 | 2 | Correction to subclauses: 5.1.15 UE GPS Timing of Cell Frames for LCS; 5.2.8 UTRAN GPS Timing of Cell Frames for LCS, including timing mapping | 3.1.1 | 3.2.0 |
| 31/03/00 | RAN_07 | RP-000066 | 047 | - | Removal of RSCP measurement | 3.1.1 | 3.2.0 |
| 31/03/00 | RAN_07 | RP-000066 | 048 | - | UE BER measurement removal and clarification for use of uplink compressed mode | 3.1.1 | 3.2.0 |
| 26/06/00 | RAN_08 | RP-000270 | 049 | 1 | Propagation delay for PCPCH | 3.2.0 | 3.3.0 |
| 26/06/00 | RAN_08 | RP-000270 | 050 | 1 | Maximum number of simultaneous compressed mode pattern sequences | 3.2.0 | 3.3.0 |
| 26/06/00 | RAN_08 | RP-000270 | 051 | 1 | Clarification of Physical channel BER | 3.2.0 | 3.3.0 |
| 26/06/00 | RAN_08 | RP-000270 | 052 | - | Clarification of transmitted code power | 3.2.0 | 3.3.0 |
| 26/06/00 | RAN_08 | RP-000270 | 053 | - | Editorial correction in TS 25.215 | 3.2.0 | 3.3.0 |
| 26/06/00 | RAN_08 | RP-000270 | 055 | - | Proposed CR for Measurements of RACH in FDD | 3.2.0 | 3.3.0 |
| 26/06/00 | RAN_08 | RP-000270 | 056 | - | Proposed CR for Measurements of CPCH in FDD | 3.2.0 | 3.3.0 |
| 26/06/00 | RAN_08 | RP-000270 | 057 | - | Transfer of information from TS 25.212 table 9 to TS 25.215 | 3.2.0 | 3.3.0 |
| 26/06/00 | RAN_08 | RP-000270 | 058 | - | Correction to CM parameter list | 3.2.0 | 3.3.0 |
| 26/06/00 | RAN_08 | RP-000270 | 062 | - | Clarification of radio link measurements in compressed mode | 3.2.0 | 3.3.0 |
| 26/06/00 | RAN_08 | RP-000270 | 063 | - | Clarification of the Transmitted code power measurement in Tx diversity | 3.2.0 | 3.3.0 |
| 26/06/00 | RAN_08 | RP-000270 | 064 | 1 | Removal of Range/mapping | 3.2.0 | 3.3.0 |
| 26/06/00 | RAN_08 | RP-000270 | 066 | - | Removal of UTRAN TrCH BLER measurement | 3.2.0 | 3.3.0 |
| 23/09/00 | RAN_09 | RP-000343 | 067 | - | Insertion of UTRAN SIR _{error} measurement in 25.215 | 3.3.0 | 3.4.0 |
| 23/09/00 | RAN_09 | RP-000343 | 068 | - | Reporting of UTRAN Transmitted carrier power | 3.3.0 | 3.4.0 |
| 23/09/00 | RAN_09 | RP-000343 | 070 | - | Clarification of UTRAN SIR measurement | 3.3.0 | 3.4.0 |
| 23/09/00 | RAN_09 | RP-000343 | 071 | - | Clarification of first significant path | 3.3.0 | 3.4.0 |
| 23/09/00 | RAN_09 | RP-000343 | 072 | - | Clarification of radio link set as the measured object | 3.3.0 | 3.4.0 |
| 15/12/00 | RAN_10 | RP-000541 | 069 | 3 | Support of parallel compressed mode patterns | 3.4.0 | 3.5.0 |
| 15/12/00 | RAN_10 | RP-000541 | 074 | 1 | Clarification of SIR _{error} measurement during compressed mode | 3.4.0 | 3.5.0 |
| 15/12/00 | RAN_10 | RP-000541 | 075 | 2 | Definition of UTRAN RSSI | 3.4.0 | 3.5.0 |
| 15/12/00 | RAN_10 | RP-000541 | 076 | 1 | Clarification of GPS timing measurements | 3.4.0 | 3.5.0 |
| 15/12/00 | RAN_10 | RP-000541 | 077 | 2 | Clarification of reference point for UE/UTRAN measurements | 3.4.0 | 3.5.0 |
| 15/12/00 | RAN_10 | RP-000541 | 078 | 1 | Correction to measurement "Rx-Tx time difference" | 3.4.0 | 3.5.0 |

| Change history | | | | | | | |
|----------------|--------|-----------|-----|-----|---|-------|-------|
| Date | TSG # | TSG Doc. | CR | Rev | Subject/Comment | Old | New |
| 15/12/00 | RAN_10 | RP-000541 | 080 | 1 | Clarifications to compressed mode usage | 3.4.0 | 3.5.0 |
| 16/03/01 | RAN_11 | - | - | - | Approved as Release 4 specification (v4.0.0) at TSG RAN #11 | 3.5.0 | 4.0.0 |
| 16/03/01 | RAN_11 | RP-010061 | 079 | 2 | Correction of the observed time difference to GSM measurement | 3.5.0 | 3.6.0 |
| 16/03/01 | RAN_11 | RP-010061 | 081 | - | Removal of UE SIR measurement | 3.5.0 | 3.6.0 |
| 16/03/01 | RAN_11 | RP-010061 | 082 | 1 | Correction of GSM reference | 3.5.0 | 3.6.0 |
| 16/03/01 | RAN_11 | RP-010061 | 083 | - | Correction of GPS Timing measurement | 3.5.0 | 3.6.0 |
| 16/03/01 | RAN_11 | RP-010061 | 086 | - | Correction on transport channel BLER | 3.5.0 | 3.6.0 |
| 16/03/01 | RAN_11 | RP-010072 | 085 | - | RTD measurement in UTRAN for FDD | 3.5.0 | 4.0.0 |
| 15/06/01 | RAN_12 | RP-010335 | 088 | - | Renaming of LCS measurements | 4.0.0 | 4.1.0 |
| 15/06/01 | RAN_12 | RP-010456 | 090 | 2 | Correction the TrCH BLER measurement | 4.0.0 | 4.1.0 |
| 21/09/01 | RAN_13 | RP-010521 | 096 | - | Removal of the BLER measurement of the BCH | 4.1.0 | 4.2.0 |
| 14/12/01 | RAN_14 | RP-010740 | 098 | - | Clarification of internal measurements | 4.2.0 | 4.3.0 |
| 14/12/01 | RAN_14 | RP-010740 | 103 | - | Clarification of P-CCPCH RSCP in 25.215 | 4.2.0 | 4.3.0 |
| 14/12/01 | RAN_14 | RP-010740 | 105 | - | Revised definitions of CPICH Ec/No and UTRA carrier RSSI | 4.2.0 | 4.3.0 |
| 14/12/01 | RAN_14 | RP-010745 | 099 | 2 | UE GPS code phase measurement | 4.2.0 | 4.3.0 |
| 14/12/01 | RAN_14 | RP-010745 | 106 | 1 | UTRAN SFN-SFN observed time difference measurement | 4.2.0 | 4.3.0 |
| 08/03/02 | RAN_15 | RP-020245 | 114 | 3 | Clarification of UE measurements Applicability | 4.3.0 | 4.4.0 |
| 08/03/02 | RAN_15 | RP-020048 | 116 | - | Correction to the definition of UTRAN GPS timing of cell frames for UE positioning | 4.3.0 | 4.4.0 |
| 08/03/02 | RAN_15 | RP-020048 | 117 | - | Correction to the definition of UE GPS timing of cell frames for UE positioning | 4.3.0 | 4.4.0 |
| 08/03/02 | RAN_15 | RP-020231 | 111 | 1 | Removal of channel coding option "no coding" for FDD | 4.3.0 | 4.4.0 |
| 08/03/02 | RAN_15 | - | - | - | Raised up to v5.0.0 together with other specs. | 4.4.0 | 5.0.0 |
| 18/09/02 | RAN_17 | RP-020530 | 119 | 4 | Transmitted carrier power measurement correction | 5.0.0 | 5.1.0 |
| 18/09/02 | RAN_17 | RP-020575 | 121 | - | Measurements for observed time difference to GSM cell | 5.0.0 | 5.1.0 |
| 18/09/02 | RAN_17 | RP-020575 | 130 | - | Compressed mode limitation | 5.0.0 | 5.1.0 |
| 18/09/02 | RAN_17 | RP-020558 | 128 | - | Correction of UE SFN-SFN type 1 measurement | 5.0.0 | 5.1.0 |
| 21/12/02 | RAN_18 | RP-020842 | 131 | 1 | Received Total Wide Band Power Measurement Definition | 5.1.0 | 5.2.0 |
| 26/03/03 | RAN_19 | RP-030017 | 133 | 3 | Correction of UTRAN SIR measurement definition | 5.2.0 | 5.3.0 |
| 26/03/03 | RAN_19 | RP-030081 | 134 | 1 | Non-HSDPA power measurement | 5.2.0 | 5.3.0 |
| 23/06/03 | RAN_20 | RP-030270 | 142 | - | Correction of transmitted carrier power definition in case of Tx diversity | 5.3.0 | 5.4.0 |
| 23/06/03 | RAN_20 | RP-030274 | 143 | - | Correction of transmitted carrier power of all codes not used for HS-PDSCH or HS-SCCH transmission definition in case of Tx diversity | 5.3.0 | 5.4.0 |
| 22/09/03 | RAN_21 | RP-030452 | 144 | 1 | Beamforming Enhancement related measurements | 5.4.0 | 5.5.0 |
| 07/01/04 | RAN_22 | - | - | - | Approved to promote to a Release 6 TS and created for M.1457 update | 5.5.0 | 6.0.0 |
| 07/01/04 | RAN_22 | RP-030726 | 145 | 2 | Beamforming Enhancement related measurements | 5.5.0 | 6.0.0 |
| | | | | | | | |
| | | | | | | | |

History

| Document history | | |
|-------------------------|---------------|-------------|
| V6.0.0 | December 2003 | Publication |
| | | |
| | | |
| | | |
| | | |