

ETSI TS 125 225 V9.2.0 (2010-06)

Technical Specification

**Universal Mobile Telecommunications System (UMTS);
Physical layer;
Measurements (TDD)
(3GPP TS 25.225 version 9.2.0 Release 9)**



Reference

RTS/TSGR-0125225v920

Keywords

UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2010.
All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™**, **TIPHON™**, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

LTE™ is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Contents

Intellectual Property Rights	2
Foreword.....	2
Foreword.....	5
1 Scope	6
2 References	6
3 Abbreviations	7
4 Control of UE/UTRAN measurements	7
4.1 General measurement concept.....	8
4.2 Measurements for cell selection/reselection.....	8
4.3 Measurements for Handover	8
4.4 Measurements for DCA.....	8
4.5 Measurements for timing advance.....	8
5 Measurement abilities for UTRA TDD.....	9
5.1 UE measurement abilities.....	9
5.1.1 P-CCPCH RSCP.....	10
5.1.2 CPICH RSCP.....	10
5.1.3 Timeslot ISCP.....	10
5.1.4 UTRA carrier RSSI.....	10
5.1.5 GSM carrier RSSI.....	11
5.1.6 SIR.....	11
5.1.7 CPICH Ec/No	11
5.1.8 Transport channel BLER	11
5.1.9 UE transmitted power	12
5.1.10 SFN-SFN observed time difference.....	13
5.1.11 SFN-CFN observed time difference	14
5.1.12 Observed time difference to GSM cell	14
5.1.13 UE GPS Timing of Cell Frames for UE positioning.....	15
5.1.14 Timing Advance (T_{ADV}) for 1.28Mcps TDD.....	15
5.1.15 UE GPS code phase	15
5.1.16 UE transmission power headroom (1.28Mcps option only)	16
5.1.17 UE transmission power headroom (3.84Mcps and 7.68Mcps options)	16
5.1.18 E-UTRA RSRP.....	17
5.1.19 E-UTRA RSRQ	17
5.2 UTRAN measurement abilities	17
5.2.1 RSCP	18
5.2.2 Timeslot ISCP.....	18
5.2.3 Received total wide band power	18
5.2.4 SIR.....	18
5.2.5 Transport channel BER.....	19
5.2.6 Transmitted carrier power.....	19
5.2.7 Transmitted code power.....	19
5.2.8 RX Timing Deviation	19
5.2.9 UTRAN GPS Timing of Cell Frames for UE positioning	20
5.2.10 SFN-SFN observed time difference.....	20
5.2.11 Cell Sync Burst Timing	20
5.2.12 Cell Sync Burst SIR.....	21
5.2.13 Received SYNC-UL Timing Deviation for 1.28Mcps TDD	21
5.2.14 Angle of Arrival (AOA) for 1.28Mcps TDD.....	21
5.2.15 HS-SICH reception quality.....	22
5.2.16 Transmitted carrier power of all codes not used for HS-PDSCH, HS-SCCH, E-AGCH, or E-HICH transmission	22
5.2.17 UpPTS interference (1.28Mcps TDD).....	23

Annex A (informative):	Monitoring GSM from TDD: Calculation Results	24
A.1	Low data rate traffic using 1 uplink and 1 downlink slot (for the 3.84 Mcps option)	24
A.1.1	Higher data rate traffic using more than 1 uplink and/or 1 downlink TDD timeslot	25
A.2	Low data rate traffic using 1 uplink and 1 downlink slot (for the 1.28 Mcps option)	26
A.2.1	Higher data rate traffic using more than 1 uplink and/or 1 downlink TDD timeslot (for 1.28Mcps TDD).....	27
Annex B (informative):	Change history	29
History	31

Foreword

This Technical Specification (TS) has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document contains the description and definition of the measurements done at the UE and network in TDD mode in order to support operation in idle mode and connected mode.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TS 25.211: "Physical channels and mapping of transport channels onto physical channels (FDD)".
- [2] 3GPP TS 25.212: "Multiplexing and channel coding (FDD)".
- [3] 3GPP TS 25.213: "Spreading and modulation (FDD)".
- [4] 3GPP TS 25.214: "Physical layer procedures (FDD)".
- [5] 3GPP TS 25.215: "Physical layer measurements (FDD)".
- [6] 3GPP TS 25.221: "Physical channels and mapping of transport channels onto physical channels (TDD)".
- [7] 3GPP TS 25.222: "Multiplexing and channel coding (TDD)".
- [8] 3GPP TS 25.223: "Spreading and modulation (TDD)".
- [9] 3GPP TS 25.224: "Physical layer procedures (TDD)".
- [10] 3GPP TS 25.301: "Radio Interface Protocol Architecture".
- [11] 3GPP TS 25.302: "Services provided by the Physical layer".
- [12] 3GPP TS 25.303: "UE functions and interlayer procedures in connected mode".
- [13] 3GPP TS 25.304: "UE procedures in idle mode".
- [14] 3GPP TS 25.331: "RRC Protocol Specification".
- [15] 3GPP TR 25.922: "Radio Resource Management Strategies".
- [16] 3GPP TR 25.923: "Report on Location Services (LCS)".
- [17] 3GPP TS 25.102: "UTRA (UE) TDD; Radio transmission and Reception"
- [18] 3GPP TS 25.105: "UTRA (BS) TDD; Radio transmission and Reception"
- [19] 3GPP TS 25.123: "Requirements for Support of Radio Resources Management (TDD)"
- [20] 3GPP TS 36.211: "E-UTRA; Physical Channels and Modulation"
- [21] 3GPP TS 36.214: "E-UTRA; Physical layer – Measurements"

3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

BCH	Broadcast Channel
BCCH	Broadcast Control Channel (GSM)
BER	Bit Error Rate
BLER	Block Error Rate
CFN	Connection Frame Number
CPICH	Common Pilot Channel (FDD)
CRC	Cyclic Redundancy Check
DCA	Dynamic Channel Allocation
DCH	Dedicated Channel
DPCH	Dedicated Physical Channel
E_c/N_0	Received energy per chip divided by the power density in the band
E-AGCH	E-DCH Absolute Grant Channel
E-HICH	E-DCH Hybrid ARQ Indicator Channel
E-UTRA	Evolved Universal Terrestrial Radio Access
FACH	Forward Access Channel
FCCH	Frequency Correction Channel (GSM)
FDD	Frequency Division Duplex
GSM	Global System for Mobile Communication
GPS	Global Positioning System
ISCP	Interference Signal Code Power
P-CCPCH	Primary Common Control Physical Channel
PCH	Paging Channel
PLMN	Public Land Mobile Network
PRACH	Physical Random Access Channel
PDSCH	Physical Downlink Shared Channel
PUSCH	Physical Uplink Shared Channel
RACH	Random Access Channel
RSCP	Received Signal Code Power
RSRP	Reference Signal Received Power
RSRQ	Reference Signal Received Quality
RSSI	Received Signal Strength Indicator
S-CCPCH	Secondary Common Control Physical Channel
SCH	Synchronisation Channel
SCTD	Space Code Transmit Diversity
SF	Spreading Factor
SFN	System Frame Number
SIR	Signal-to-Interference Ratio
TDD	Time Division Duplex
TDMA	Time Division Multiple Access
TrCH	Transport Channel
TTI	Transmission Time Interval
UE	User Equipment
UMTS	Universal Mobile Telecommunications System
USCH	Uplink Shared Channel
UTRA	UMTS Terrestrial Radio Access
UTRAN	UMTS Terrestrial Radio Access Network

4 Control of UE/UTRAN measurements

In this clause the general measurement control concept of the higher layers is briefly described to provide an understanding on how L1 measurements are initiated and controlled by higher layers.

4.1 General measurement concept

L1 provides with the measurement specifications a toolbox of measurement abilities for the UE and the UTRAN. These measurements can be differentiated in different measurement types: intra-frequency, inter-frequency, inter-system, traffic volume, quality and internal measurements (see [14]).

In the L1 measurement specifications the measurements are distinguished between measurements in the UE (the messages will be described in the RRC Protocol) and measurements in the UTRAN (the messages will be described in the NBAP and the Frame Protocol).

To initiate a specific measurement the UTRAN transmits a "measurement control message" to the UE including a measurement ID and type, a command (setup, modify, release), the measurement objects and quantity, the reporting quantities, criteria (periodical/event-triggered) and mode (acknowledged/unacknowledged), see [14].

When the reporting criteria is fulfilled the UE shall answer with a "measurement report message" to the UTRAN including the measurement ID and the results.

In idle mode the measurement control message is broadcast in a System Information.

Intra-frequency reporting events, traffic volume reporting events and UE internal measurement reporting events described in [14] define events which trigger the UE to send a report to the UTRAN. This defines a toolbox from which the UTRAN can choose the needed reporting events.

4.2 Measurements for cell selection/reselection

Whenever a PLMN has been selected the UE shall start to find a suitable cell to camp on, this is "cell selection".

When camped on cell the UE regularly searches for a better cell depending on the cell reselection criteria, this is called "cell reselection". The procedures for cell selection and reselection are described in [13] and the measurements carried out by the UE are explained in this specification.

4.3 Measurements for Handover

For the handover preparation the UE receives from the UTRAN a list of cells (e.g. TDD, FDD or GSM) which the UE shall monitor (see "monitored set" in [14]) in its idle timeslots.

At the beginning of the measurement process the UE shall find synchronization to the cell to measure using the synchronization channel. This is described under "cell search" in [9] if the monitored cell is a TDD cell and in [4] if it is an FDD cell.

For a TDD cell to monitor after this procedure the exact timing of the midamble of the P-CCPCH is known and the measurements can be performed. Depending on the UE implementation and if timing information about the cell to monitor is available, the UE may perform the measurements on the P-CCPCH directly without prior SCH synchronisation.

4.4 Measurements for DCA

DCA is used to optimise the resource allocation by means of a channel quality criteria or traffic parameters. The DCA measurements are configured by the UTRAN. The UE reports the measurements to the UTRAN.

For DCA no measurements are performed in idle mode in the serving TDD cell.

When connecting with the initial access the UE immediately starts measuring the ISCP of time slots which are communicated on the BCH. The measurements and the preprocessing are done while the UTRAN assigns an UL channel for the UE for signalling and measurement reporting.

In connected mode the UE performs measurements according to a measurement control message from the UTRAN.

4.5 Measurements for timing advance

To update timing advance of a moving UE the UTRAN measures "Received Timing Deviation", i.e. the time difference of the received UL transmission (PRACH, DPCH, PUSCH) in relation to its timeslot structure that means in relation to the ideal case where an UL transmission would have zero propagation delay. The measurements are reported to higher layers, where timing advance values are calculated and signalled to the UE.

5 Measurement abilities for UTRA TDD

In this clause the physical layer measurements reported to higher layers. (this may also include UE internal measurements not reported over the air-interface) are defined.

5.1 UE measurement abilities

The structure of the table defining a UE measurement quantity is shown below.

Column field	Comment
Definition	Contains the definition of the measurement.
Applicable for	<p>States in which RRC state according to [14] a measurement shall be possible to be performed. For RRC connected mode states information is also given on the possibility to perform the measurement on intra-frequency and/or inter-frequency.</p> <p>The following terms are used in the tables: Idle = Shall be possible to perform in idle mode; URA_PCH = Shall be possible to perform in URA_PCH; CELL_PCH = Shall be possible to perform in CELL_PCH; CELL_FACH = Shall be possible to perform in CELL_FACH; CELL_DCH = Shall be possible to perform in CELL_DCH;</p> <p>For all RRC connected mode states i.e. URA_PCH, CELL_PCH, CELL_FACH and CELL_DCH Intra appended to the RRC state = Shall be possible to perform in the corresponding RRC state on an intra-frequency cell; Inter appended to the RRC state = Shall be possible to perform in the corresponding RRC state on an inter-frequency cell. Inter-RAT appended to the RRC state = Shall be possible to perform in the corresponding RRC state on an inter-RAT cell.</p>

NOTE 1: Measurements for TDD which are specified on the Primary CCPCH (P-CCPCH) are carried out on the P-CCPCH or on any other beacon channel, see [6].

NOTE 2: For the beacon channels [6], the received power measurements shall be based on the received power for midamble $m^{(1)}$ if no Space Code Transmit Diversity (SCTD) is applied to the P-CCPCH and on the sum of the received powers for midambles $m^{(1)}$ and $m^{(2)}$ if SCTD is applied to the P-CCPCH.

NOTE 3: The UTRAN has to take into account the UE capabilities when specifying the timeslots to be measured in the measurement control message.

NOTE 4: The line "applicable for" indicates whether the measurement is applicable for inter-frequency and/or intra-frequency and furthermore for idle and/or connected mode.

NOTE 5: The Interference part of the SIR measurement will be dependent on the receiver implementation, and will normally be different from the Timeslot ISCP measurement.

NOTE 6: The measurement "Timeslot ISCP" is only a measure of the intercell interference.

NOTE 7: The term "antenna connector of the UE" used in this sub-clause to define the reference point for the UE measurements is defined in [17].

NOTE 8: Performance and reporting requirements for the UE measurements are defined in [19].

5.1.1 P-CCPCH RSCP

Definition	Received Signal Code Power, the received power on P-CCPCH of own or neighbour cell. The reference point for the RSCP shall be the antenna connector of the UE. If receiver diversity is in use by the UE, the reported value shall not be lower than the corresponding P-CCPCH RSCP of any of the individual diversity branches.
Applicable for	Idle, URA_PCH intra, URA_PCH inter, CELL_PCH intra, CELL_PCH inter, CELL_FACH intra, CELL_FACH inter, CELL_DCH intra, CELL_DCH inter

5.1.2 CPICH RSCP

Definition	Received Signal Code Power, the received power on one code measured on the Primary CPICH. The reference point for the RSCP shall be the antenna connector of the UE. (This measurement is used in TDD for monitoring FDD cells while camping on a TDD cell). If Tx diversity is applied on the Primary CPICH the received code power from each antenna shall be separately measured and summed together in [W] to a total received code power on the Primary CPICH.
Applicable for	Idle, URA_PCH inter, CELL_PCH inter, CELL_FACH inter, CELL_DCH inter

5.1.3 Timeslot ISCP

Definition	Interference Signal Code Power, the interference on the received signal in a specified timeslot measured on the midamble. The reference point for the ISCP shall be the antenna connector of the UE.
Applicable for	CELL_FACH intra, CELL_DCH intra

5.1.4 UTRA carrier RSSI

Definition	The received wide band power, including thermal noise and noise generated in the receiver, within the bandwidth defined by the receiver pulse shaping filter, for TDD within a specified timeslot. The reference point for the measurement shall be the antenna connector of the UE. If receiver diversity is in use by the UE, the reported value shall not be lower than the corresponding UTRA carrier RSSI of any of the individual diversity branches.
Applicable for	CELL_DCH intra, CELL_DCH inter

5.1.5 GSM carrier RSSI

Definition	Received Signal Strength Indicator, the wide-band received power within the relevant channel bandwidth Measurement shall be performed on a GSM BCCH carrier. The reference point for the RSSI shall be the antenna connector of the UE.
Applicable for	Idle, URA_PCH inter-RAT, CELL_PCH inter-RAT, CELL_FACH inter-RAT, CELL_DCH inter-RAT

5.1.6 SIR

Definition	Signal to Interference Ratio, defined as: $(RSCP/Interference) \times SF$. Where: RSCP = Received Signal Code Power, the received power on the code of a specified DPCH or PDSCH. Interference = The interference on the received signal in the same timeslot which can't be eliminated by the receiver. SF = The used spreading factor. The reference point for the SIR shall be the antenna connector of the UE. If receiver diversity is in use by the UE, the reported SIR value shall not be lower than the corresponding SIR of any of the individual diversity branches.
Applicable for	CELL_FACH intra, CELL_DCH intra

5.1.7 CPICH Ec/No

Definition	The received energy per chip divided by the power density in the band. The CPICH Ec/No is identical to CPICH RSCP/UTRA Carrier RSSI. The measurement shall be performed on the Primary CPICH. The reference point for the CPICH Ec/No shall be the antenna connector of the UE. (This measurement is used in TDD for monitoring FDD cells while camping on a TDD cell) If Tx diversity is applied on the Primary CPICH the received energy per chip (Ec) from each antenna shall be separately measured and summed together in [Ws] to a total received chip energy per chip on the Primary CPICH, before calculating the Ec/No.
Applicable for	Idle, URA_PCH inter, CELL_PCH inter, CELL_FACH inter, CELL_DCH inter

5.1.8 Transport channel BLER

Definition	Estimation of the transport channel block error rate (BLER). The BLER estimation shall be based on evaluating the CRC on each transport block.
Applicable for	CELL_DCH intra

5.1.9 UE transmitted power

Definition	The total UE transmitted power on one carrier in a specified timeslot. The reference point for the UE transmitted power shall be the antenna connector of the UE.
Applicable for	CELL_FACH intra, CELL_DCH intra

5.1.10 SFN-SFN observed time difference

<p>Definition</p>	<p>SFN-SFN observed time difference is the time difference of the reception times of frames from two cells (serving and target) measured in the UE and expressed in chips. It is distinguished by two types. Type 2 applies if the serving and the target cell have the same frame timing.</p> <p>The reference point for the SFN-SFN observed time difference type 1 and 2 shall be the antenna connector of the UE.</p> <p>Type 1: SFN-SFN observed time difference =</p> $\begin{cases} \text{OFF} \times 12800 + T_m \text{ in chips} & \text{for } 1.28 \text{ Mcps TDD} \\ \text{OFF} \times 38400 + T_m \text{ in chips} & \text{for } 3.84 \text{ Mcps TDD} \\ \text{OFF} \times 76800 + T_m \text{ in chips} & \text{for } 7.68 \text{ Mcps TDD} \end{cases}$ <p>where:</p> <p>$T_m = T_{\text{RxSFNi}} - T_{\text{RxSFNk}}$, given in chip units</p> <p>with the range $\begin{cases} [0, 1, \dots, 12799] \text{ chips} & \text{for } 1.28 \text{ Mcps TDD} \\ 0, 1, \dots, 38399 \text{ chips} & \text{for } 3.84 \text{ Mcps TDD} \\ 0, 1, \dots, 76799 \text{ chips} & \text{for } 7.68 \text{ Mcps TDD} \end{cases}$</p> <p>$T_{\text{RxSFNi}}$ = time of start (defined by the first detected path in time) of the received frame SFN_i of the serving TDD cell i.</p> <p>T_{RxSFNk} = time of start (defined by the first detected path in time) of the received frame SFN_k of the target UTRA cell k received most recently in time before the time instant T_{RxSFNi} in the UE. If this frame SFN_k of the target UTRA cell is received exactly at T_{RxSFNi} then $T_{\text{RxSFNk}} = T_{\text{RxSFNi}}$ (which leads to $T_m = 0$).</p> <p>OFF = (SFN_i - SFN_k) mod 256, given in number of frames with the range [0, 1, ..., 255] frames</p> <p>SFN_i = system frame number for downlink frame from serving TDD cell i in the UE at the time T_{RxSFNi}.</p> <p>SFN_k = system frame number for downlink frame from target UTRA cell k received in the UE at the time T_{RxSFNk}. (for FDD: the P-CCPCH frame)</p> <p>The reference point for the SFN-SFN observed time difference type 1 shall be the antenna connector of the UE.</p> <p>Type 2: SFN-SFN observed time difference = $T_{\text{Rx_Frame_cell k}} - T_{\text{Rx_Frame_cell i}}$, in chips, where</p> <p>$T_{\text{Rx_Frame_cell i}}$: time of start (defined by the first detected path in time) of the frame boundary from the serving TDD cell i.</p> <p>$T_{\text{Rx_Frame_cell k}}$: time of start (defined by the first detected path in time) of the frame boundary from the target UTRA cell k that is closest in time to the frame boundary of the serving TDD cell i.</p> <p>The reference point for the SFN-SFN observed time difference type 2 shall be the antenna connector of the UE.</p>
<p>Applicable for</p>	<p>Type 1: CELL_FACH intra</p> <p>Type 2: Idle, URA_PCH intra, URA_PCH inter, CELL_PCH intra, CELL_PCH inter, CELL_FACH intra, CELL_FACH inter, CELL_DCH intra, CELL_DCH inter</p>

5.1.11 SFN-CFN observed time difference

Definition	<p>The SFN-CFN observed time difference is defined as:</p> <p>T_m for an FDD neighbour cell (i.e. the value is reported in chips), OFF for a TDD neighbour cell (i.e the value is reported in frames), where:</p> <p>$T_m = T_{UE_{TX}} - T_{RxSFN}$, given in chip units with the range [0, 1, ..., 38399] chips.</p> <p>$T_{UE_{TX}} =$ the time at the beginning of the frame with the connection frame number CFN_{TX} considering the transmission from the UE in the serving TDD cell.</p> <p>$T_{RxSFN} =$ the time (defined by the first detected path in time) at the beginning of the frame with the system frame number SFN (for FDD neighbour cells: P-CCPCH frame is considered) received at the UE from a neighbour cell. T_{RxSFN} is the time instant most recent in time before the time instant $T_{UE_{TX}}$</p> <p>OFF = $(SFN - CFN_{TX}) \bmod 256$, given in number of frames with the range [0, 1, ..., 255] frames.</p> <p>$CFN_{TX} =$ the connection frame number for the UE transmission.</p> <p>SFN = is the system frame number for the neighbouring cell frame (for FDD neighbour cells: P-CCPCH frame) received in the UE at the time instant T_{RxSFN}.</p> <p>The reference point for the SFN-CFN observed time difference shall be the antenna connector of the UE.</p>
Applicable for	CELL_DCH intra, CELL_DCH inter

5.1.12 Observed time difference to GSM cell

Definition	<p>Observed time difference to GSM cell is reported as the time difference T_m in ms, where</p> <p>$T_m = T_{RxGSMk} - T_{RxSFN0i}$</p> <p>$T_{RxSFN0i}$: time of start (defined by the first detected path in time) of the received frame SFN=0 of the serving TDD cell i</p> <p>T_{RxGSMk}: time of start of the GSM BCCH 51-multiframe of the considered target GSM frequency k received closest in time after the time $T_{RxSFN0i}$. If the next GSM BCCH 51-multiframe is received exactly at $T_{RxSFN0i}$ then $T_{RxGSMk} = T_{RxSFN0i}$ (which leads to $T_m=0$). The beginning of the GSM BCCH 51-multiframe is defined as the beginning of the first tail bit of the frequency correction burst in the first TDMA-frame of the GSM BCCH 51-multiframe, i.e. the TDMA-frame following the IDLE-frame.</p> <p>The reference point for the Observed time difference to GSM cell shall be the antenna connector of the UE.</p> <p>The reported time difference is calculated from the actual measurement in the UE. The actual measurement shall be based on:</p> <p>$T_{MeasGSM,j}$: The start of the first tail bit of the most recently received GSM SCH on frequency j</p> <p>$T_{MeasSFN,i}$: The start of the last frame received in TDD cell i before receiving the GSM SCH on frequency j</p> <p>For calculating the reported time difference, the frame lengths are always assumed to be 10 ms for UTRA and (60/13) ms for GSM.</p>
Applicable for	Idle, URA PCH inter-RAT, CELL PCH inter-RAT, CELL_DCH Inter-RAT

5.1.13 UE GPS Timing of Cell Frames for UE positioning

Definition	$T_{UE-GPSj}$ is defined as the time of occurrence of a specified UTRAN event according to GPS Time Of Week. The specified UTRAN event is the beginning of a particular frame (identified through its SFN) in the first detected path (in time) of the cell j P-CCPCH. The reference point for $T_{UE-GPSj}$ shall be the antenna connector of the UE.
Applicable for	CELL_FACH intra, CELL_DCH intra

5.1.14 Timing Advance (T_{ADV}) for 1.28Mcps TDD

Definition	<p>The "timing advance (T_{ADV})" is the time difference</p> $T_{ADV} = T_{RX} - T_{TX}$ <p>Where</p> <p>T_{RX}: calculated beginning time of the first uplink time slot in the first subframe used by the UE with the UE timing according to the reception of start (defined by the first detected path in time) of a certain downlink time slot (for the timing it is assumed that the time slots within a sub-frame are scheduled like given in the frame structure described in 25.221 chapter5A.1)</p> <p>T_{TX}: time of the beginning of the same uplink time slot by the UE (for the timing it is assumed that the time slots within a sub-frame are scheduled like given in the frame structure described in 25.221 chapter5A.1)</p> <p>The reference point for the Timing Advance (T_{ADV}) shall be the antenna connector of the UE.</p>
Applicable for	CELL_FACH intra, CELL_DCH intra

5.1.15 UE GPS code phase

Definition	The whole and fractional phase of the spreading code of the i^{th} GPS satellite signal. The reference point for the GPS code phase shall be the antenna connector of the UE.
Applicable for	Void (this measurement is not related to UTRAN/GSM signals; its applicability is therefore independent of the UE RRC state.)

5.1.16 UE transmission power headroom (1.28Mcps option only)

Definition	<p>UE transmission power headroom (UPH) is the ratio of the maximum UE transmission power and the product of P_{e-base} power and serving cell path loss, and shall be calculated as following:</p> $UPH = \frac{P_{max,tx}}{P_{e-base} \cdot L_{Path_loss}}$ <p>where:</p> <p>$P_{max,tx} = \min \{ \text{Maximum allowed UL TX Power}, P_{max} \}$ is the UE maximum transmission power; <i>Maximum allowed UL TX Power</i> is set by UTRAN and defined in [14];</p> <p>P_{max} is the UE nominal maximum output power according to the UE power class and specified in [17] table 6.2;</p> <p>P_{e-base} is a closed-loop quantity defined in [9] and L_{Path_loss} is the serving cell path loss.</p> <p>The reference point for the UE transmission power headroom shall be the antenna connector of the UE.</p>
Applicable for	CELL_DCH intra

5.1.17 UE transmission power headroom (3.84Mcps and 7.68Mcps options)

Definition	<p>UE transmission power headroom (UPH) is the ratio of the maximum UE transmission power and a value $P_{e,norm}$, and shall be calculated as per the following:</p> $UPH = \frac{P_{max,tx}}{P_{e,norm}}$ <p>where:</p> <p>$P_{max,tx} = \min \{ \text{Maximum allowed UL TX Power}, P_{max} \}$ is the UE maximum transmission power; <i>Maximum allowed UL TX Power</i> is set by UTRAN and defined in [14];</p> <p>P_{max} is the UE nominal maximum output power according to the UE power class and specified in [17] table 6.1;</p> <p>$P_{e,norm}$ is equal to the calculated E-PUCH transmission power as defined in [9] for the case in which $\beta_e = 0$.</p> <p>The reference point for the UE transmission power headroom shall be the antenna connector of the UE.</p>
Applicable for	CELL_DCH intra

5.1.18 E-UTRA RSRP

Definition	<p>Reference signal received power (RSRP), is defined as the linear average over the power contributions (in [W]) of the resource elements that carry cell-specific reference signals within the considered measurement frequency bandwidth.</p> <p>For RSRP determination the cell-specific reference signals R_0 according to TS 36.211 [20] shall be used. If the UE can reliably detect that R_1 is available it may use R_1 in addition to R_0 to determine RSRP.</p> <p>The reference point for the RSRP shall be the antenna connector of the UE.</p> <p>If receiver diversity is in use by the UE, the reported value shall not be lower than the corresponding RSRP of any of the individual diversity branches.</p>
Applicable for	<p>Idle, URA_PCH inter-RAT CELL_PCH inter-RAT CELL_DCH inter-RAT</p>

Note 1: The number of resource elements within the considered measurement frequency bandwidth and within the measurement period that are used by the UE to determine RSRP is left up to the UE implementation with the limitation that corresponding measurement accuracy requirements have to be fulfilled.

Note 2: The power per resource element is determined from the energy received during the useful part of the symbol, excluding the CP.

5.1.19 E-UTRA RSRQ

Definition	<p>Reference Signal Received Quality (RSRQ) is defined as the ratio $N \times \text{RSRP} / (\text{E-UTRA carrier RSSI})$, where N is the number of resource blocks of the E-UTRA carrier RSSI measurement bandwidth. The measurements in the numerator and denominator shall be made over the same set of resource blocks.</p> <p>E-UTRA Carrier Received Signal Strength Indicator (RSSI), comprises the linear average of the total received power (in [W]) observed only in OFDM symbols containing reference symbols for antenna port 0, in the measurement bandwidth, over N number of resource blocks by the UE from all sources, including co-channel serving and non-serving cells, adjacent channel interference, thermal noise etc.</p> <p>The reference point for the RSRQ shall be the antenna connector of the UE.</p> <p>If receiver diversity is in use by the UE, the reported value shall not be lower than the corresponding RSRQ of any of the individual diversity branches.</p>
Applicable for	<p>Idle, URA_PCH inter-RAT CELL_PCH inter-RAT CELL_DCH inter-RAT</p>

5.2 UTRAN measurement abilities

NOTE 1: If the UTRAN supports multiple frequency bands then the measurements apply for each frequency band individually.

NOTE 2: The Interference part of the SIR measurement will be dependent on the receiver implementation, and will normally be different from the Timeslot ISCP measurement

NOTE 3: The term "antenna connector" used in this sub-clause to define the reference point for the UTRAN measurements refers to the "BS antenna connector" test port A and test port B as described in [18]. The term "antenna connector" refers to Rx or Tx antenna connector as described in the respective measurement definitions.

5.2.1 RSCP

Definition	Received Signal Code Power, the received power on one DPCH, PRACH, PUSCH, HS-SICH or E-PUCH code. The reference point for the RSCP shall be the Rx antenna connector. When Cell Portions are defined in the cell, the RSCP for each Cell Portion can be measured and reported to higher layers.
-------------------	---

5.2.2 Timeslot ISCP

Definition	Interference Signal Code Power, the interference on the received signal in a specified timeslot measured on the midamble. The reference point for the ISCP shall be the Rx antenna connector. In the case of RX antenna diversity, the average of the linear values [W] of the ISCP values measured for each antenna branch shall be reported. When Cell Portions are defined in the cell, the Timeslot ISCP for each Cell Portion can be measured and reported to higher layers.
-------------------	---

5.2.3 Received total wide band power

Definition	The received wide band power in a specified timeslot including the noise generated in the receiver, within the bandwidth defined by the receiver pulse shaping filter. The reference point for the measurement shall be the Rx antenna connector. In case of receiver diversity the reported value shall be the linear average of the power in [W] in the diversity branches. When Cell Portions are defined in the cell, the received total wide band power for each Cell Portion can be measured and reported to higher layers.
-------------------	---

5.2.4 SIR

Definition	Signal to Interference Ratio, defined as: $(RSCP/Interference) \times SF$. Where: RSCP = Received Signal Code Power, the received power on the code of a specified DPCH, PRACH, PUSCH, HS-SICH or E-PUCH. Interference = The interference on the received signal in the same timeslot which can't be eliminated by the receiver. SF = The used spreading factor. The reference point for the SIR shall be the Rx antenna connector.
-------------------	---

5.2.5 Transport channel BER

Definition	<p>The transport channel BER is an estimation of the average bit error rate (BER) of DCH or USCH data. The transport channel (TrCH) BER is measured from the data considering only non-punctured bits at the input of the channel decoder in Node B.</p> <p>It shall be possible to report an estimate of the transport channel BER for a TrCH after the end of each TTI of the TrCH. The reported TrCH BER shall be an estimate of the BER during the latest TTI for that TrCH. Transport channel BER is only required to be reported for TrCHs that are channel coded.</p>
-------------------	--

5.2.6 Transmitted carrier power

Definition	<p>Transmitted carrier power, is the ratio between the total transmitted power and the maximum transmission power.</p> <p>Total transmission power is the power [W] transmitted on one DL carrier in a specific timeslot from one UTRAN access point.</p> <p>Maximum transmission power is the power [W] on the same carrier when transmitting at the configured maximum transmission power for the cell.</p> <p>The measurement shall be possible on any carrier transmitted from the UTRAN access point. The reference point for the transmitted carrier power measurement shall be the Tx antenna connector.</p> <p>In case of Tx diversity the transmitted carrier power is the ratio between the sum of the total transmitted powers of all branches and the maximum transmission power. When Cell Portions are defined in the cell, the transmitted carrier power for each Cell Portion can be measured and reported to higher layers.</p>
-------------------	--

5.2.7 Transmitted code power

Definition	<p>Transmitted Code Power, is the transmitted power on one carrier and one channelisation code in one timeslot. The reference point for the transmitted code power measurement shall be the Tx antenna connector.</p> <p>In the case of Tx diversity the transmitted code power for each branch shall be measured and the linear sum of the values shall be reported to higher layers, i.e. only one value will be reported to higher layers.</p>
-------------------	---

5.2.8 RX Timing Deviation

Definition	<p>"RX Timing Deviation" is the time difference $TRX_{dev} = TTS - TRX_{path}$ in chips, with</p> <p>TRX_{path}: time of the reception in the Node B of the first detected uplink path (in time) to be used in the detection process. The reference point for TRX_{path} shall be the Rx antenna connector. For 1.28 Mcps TDD only the first UL timeslot in the first subframe used by the UE is used for the calculation of $T_{RX_{path}}$.</p> <p>TTS: time of the beginning of the respective slot according to the Node B internal timing</p>
-------------------	--

NOTE: This measurement can be used for timing advance calculation or location services.

5.2.9 UTRAN GPS Timing of Cell Frames for UE positioning

Definition	$T_{\text{UTRAN-GPS}}$ is defined as the time of occurrence of a specified UTRAN event according to GPS Time Of Week. The specified UTRAN event is the beginning of the transmission of a particular frame (identified through its SFN) transmitted in the cell. The reference point for $T_{\text{UTRAN-GPS}}$ shall be the Tx antenna connector.
-------------------	--

5.2.10 SFN-SFN observed time difference

Definition	<p>SFN-SFN observed time difference = $T_{\text{Rx_Frame_cell } k} - T_{\text{Rx_Frame_cell } i}$, in chips, where</p> <p>$T_{\text{Rx_Frame_cell } i}$: time of start (defined by the first detected path in time) of the frame boundary from the TDD cell i.</p> <p>$T_{\text{Rx_Frame_cell } k}$: time of start (defined by the first detected path in time) of the frame boundary from the cell k that is closest in time to the frame boundary of the TDD cell i.</p>
-------------------	--

5.2.11 Cell Sync Burst Timing

Definition	<p>Cell sync burst timing is the time of start (defined by the first detected path in time) of the cell sync burst of a neighbouring cell. This measurement is applicable for 3.84Mcps TDD and 1.28Mcps TDD. For 1.28 Mcps TDD the DwPCH represents the cell sync burst. Type 1 is used for the initial phase of Node B synchronization. Type 2 is used for the steady-state phase of Node B synchronization. Both have different range.</p> <p>The reference point for the cell sync burst timing measurement shall be the Rx antenna connector.</p> <p>Type 1: Cell sync burst timing = $T_{\text{RX}} - T_{\text{slot}}$ in chips, where</p> <p>T_{slot}: time of start of the cell sync timeslot in the frame, where the cell sync burst was received.</p> <p>T_{RX}: time of start (defined by the first detected path in time) of a cell sync burst received from the target UTRA cell.</p> <p>Type 2: Cell sync burst timing = $T_{\text{RX}} - T_{\text{slot}}$, in chips, where</p> <p>T_{slot}: time of start of the cell sync timeslot in the frame, where the cell sync burst was received.</p> <p>T_{RX}: time of start (defined by the first detected path in time) of a cell sync burst received from the target UTRA cell.</p>
-------------------	--

5.2.12 Cell Sync Burst SIR

Definition	<p>Signal to Interference Ratio for the cell sync burst, defined as: $RSCP/Interference$, where:</p> <p>$RSCP =$ Received Signal Code Power, the received power on the code and code offset of a cell sync burst.</p> <p>$Interference =$ The interference on the received signal in the same timeslot which can't be eliminated by the receiver</p> <p>This measurement is applicable for 3.84Mcps TDD and 1.28Mcps TDD.</p> <p>The reference point for the cell sync burst SIR shall be the Rx antenna connector. For 1.28 Mcps TDD the DwPCH represents the cell sync burst.</p>
-------------------	--

5.2.13 Received SYNC-UL Timing Deviation for 1.28Mcps TDD

Definition	<p>"Received SYNC-UL Timing Deviation" is the time difference</p> $UpPCH_{POS} = UpPCH_{R_{xpath}} - UpPCH_{TS}$ <p>Where</p> <p>$UpPCH_{R_{xpath}}$: time of the reception in the Node B of the SYNC-UL to be used in the uplink synchronization process</p> <p>$UpPCH_{TS}$: time instance 128 chips prior to the start of the UpPCH according to the Node B internal timing</p> <p>UE can calculate Round Trip Time (RTT) towards the UTRAN after the reception of the FPACH containing $UpPCH_{POS}$ transmitted from the UTRAN.</p> <p>Round Trip Time RTT is defined by</p> $RTT = UpPCH_{ADV} + UpPCH_{POS} - 8 * 16 T_C$ <p>Where</p> <p>$UpPCH_{ADV}$: the amount of time by which the transmission of UpPCH is advanced in time relative to the end of the guard period according to the UE Rx timing.</p>
-------------------	--

5.2.14 Angle of Arrival (AOA) for 1.28Mcps TDD

Definition	<p>AOA defines the estimated angle of a user with respect to a reference direction. The reference direction for this measurement shall be the North, positive in a counter-clockwise direction. The AOA is determined at the BS antenna for an UL channel corresponding to this UE.</p>
-------------------	---

5.2.15 HS-SICH reception quality

Definition	<p>The HS-SICH reception quality is defined via the following quantities. Each quantity is measured over the defined reporting period per UE:</p> <ul style="list-style-type: none"> • the number of expected HS-SICH transmissions from a given UE, and • the number of unsuccessful HS-SICH receptions for this same UE in the Node B. <p>The number of expected HS-SICH transmissions from any given UE shall correspond to the number of scheduled HS-SCCH transmissions to the same UE.</p> <p>Unsuccessful HS-SICH receptions shall be further divided into two categories;</p> <ul style="list-style-type: none"> • the number of failed HS-SICH receptions, and • the number of missed HS-SICH receptions <p>for a given UE counted during the reporting period.</p> <p>A failed HS-SICH reception is defined as an HS-SICH estimated to have been transmitted by the UE, but deemed not to have been received successfully by the Node B. A missed HS-SICH reception is defined as an HS-SICH estimated not to have been transmitted by the UE, if an HS-SICH transmission occasion was scheduled for the UE.</p> <p>For the HS-SICH reception quality measurement, only HS-SICH transmission occasions for the respective UE during the reporting period shall be taken into account.</p>
-------------------	---

5.2.16 Transmitted carrier power of all codes not used for HS-PDSCH, HS-SCCH, E-AGCH, or E-HICH transmission

Definition	<p>Transmitted carrier power of all codes not used for HS-PDSCH, HS-SCCH, E-AGCH or E-HICH transmission is the ratio between the total transmitted power of all codes not used for HS-PDSCH, HS-SCCH, E-AGCH or E-HICH transmission in a specified timeslot on one DL carrier from one UTRAN access point, and the maximum transmission power possible to use on that DL carrier in the timeslot. Total transmission power of all codes not used for HS-PDSCH, HS-SCCH, E-AGCH or E-HICH transmission is the sum of the mean power levels [W] of each of the codes not used for HS-PDSCH, HS-SCCH, E-AGCH or E-HICH transmission in the specified timeslot on one carrier from one UTRAN access point. Maximum transmission power is the mean power [W] in the specified timeslot on one carrier from one UTRAN access point when transmitting at the configured maximum power for the cell. The measurement shall be possible on any timeslot and carrier transmitted from the UTRAN access point. The reference point for the transmitted carrier power measurement of all codes not used for HS-PDSCH, HS-SCCH, E-AGCH or E-HICH transmission shall be the Tx antenna connector. In case of Tx diversity the transmitted carrier power of all codes not used for HS-PDSCH, HS-SCCH, E-AGCH or E-HICH transmission is the ratio between the sum of the total transmitted powers of all codes not used for HS-PDSCH, HS-SCCH, E-AGCH or E-HICH transmission of all branches and the maximum transmission power. When Cell Portions are defined in the cell, the transmitted carrier power of all codes not used for HS-PDSCH, HS-SCCH, E-AGCH or E-HICH transmission for each Cell Portion can be measured and reported to higher layers.</p>
-------------------	--

5.2.17 UpPTS interference (1.28Mcps TDD)

Definition	The level of interference in the UpPTS, defined as the difference between the mean received power in the UpPTS and the sum of the estimated mean power levels of all detected UpPCH transmissions. In the case of antenna diversity, the linear average of the UpPTS interference levels calculated for each antenna branch shall be calculated. The reference point for the UpPTS interference measurement shall be the Rx antenna connector. When Cell Portions are defined in the cell, the UpPTS interference for each Cell Portion can be measured and reported to higher layers.
-------------------	--

Annex A (informative): Monitoring GSM from TDD: Calculation Results

A.1 Low data rate traffic using 1 uplink and 1 downlink slot (for the 3.84 Mcps option)

NOTE: The section evaluates the time to acquire the FCCH if all idle slots are devoted to the tracking of a FCCH burst, meaning that no power measurements is done concurrently. The derived figures are better than those for GSM. The section does not derive though any conclusion. A conclusion may be that the use of the idle slots is a valid option. An alternative conclusion may be that this is the only mode to be used, removing hence the use of the slotted frames for low data traffic or the need for a dual receiver, if we were to considering the monitoring of GSM cells only, rather than GSM, TDD and FDD.

If a single synthesiser UE uses only one uplink and one downlink slot, e.g. for speech communication, the UE is not in transmit or receive state during 13 slots in each frame. According to the timeslot numbers allocated to the traffic, this period can be split into two continuous idle intervals A and B as shown in the figure below.

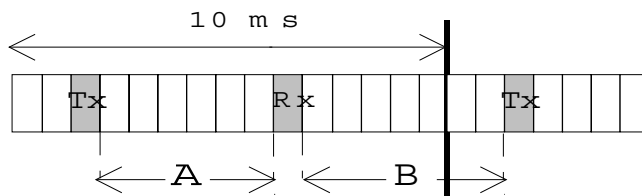


Figure A.1: Possible idle periods in a frame with two occupied timeslots

A is defined as the number of idle slots between the Tx and Rx slots and B the number of idle slots between the Rx and Tx slots. It is clear that $A+B=13$ time slots.

In the scope of low cost terminals, a [0.8] ms period is supposed to be required to perform a frequency jump from UMTS to GSM. This lets possibly two free periods of $A \cdot T_s - 1.6$ ms and $B \cdot T_s - 1.6$ ms during which the mobile station can monitor GSM, T_s being the slot period.

Following table evaluates the average synchronisation time and maximum synchronisation time, where the announced synchronisation time corresponds to the time needed to find the FCCH. The FCCH is supposed to be perfectly detected meaning that the FCCH is found if it is entirely present in the monitoring window. The FCCH being found the SCH location is unambiguously known from that point. All the 13 idle slots are assumed to be devoted to FCCH tracking and the UL traffic is supposed to occupy the time slot 0.

Table A.1: example- of average and maximum synchronisation time with two busy timeslots per frame and with 0.8 ms switching time (*)

Downlink time slot number	Number of free TS in A	Number of free TS in B	Average synchronisation time (ms)	Maximum synchronisation time (ms)
1	0	13	44	140
2	1	12	50	187
3	2	11	58	188
4	3	10	66	189
5	4	9	70	233
6	5	8	77	234
7	6	7	75	189
8	7	6	75	189
9	8	5	75	235
10	9	4	67	235
11	10	3	63	186
12	11	2	56	186
13	12	1	49	186
14	13	0	43	132

(*) All simulations have been performed with a random initial delay between GSM frames and UMTS frames.

Each configuration of TS allocation described above allows a monitoring period sufficient to acquire synchronisation.

A.1.1 Higher data rate traffic using more than 1 uplink and/or 1 downlink TDD timeslot

The minimum idle time to detect a complete FCCH burst for all possible alignments between the GSM and the TDD frame structure (called "guaranteed FCCH detection"), assuming that monitoring happens every TDD frame, can be calculated as follows (t_{FCCH} = one GSM slot):

$$t_{\min, \text{guaranteed}} = 2 \times t_{\text{synth}} + t_{FCCH} + \frac{10\text{ms}}{13} = 2 \times t_{\text{synth}} + \frac{35\text{ms}}{26}$$

- (e.g for $t_{\text{synth}}=0\text{ms}$: 3 TDD **consecutive** idle timeslots needed, for $t_{\text{synth}}=0,3\text{ms}$: 3 slots, for $t_{\text{synth}}=0,5\text{ms}$: 4 slots, for $t_{\text{synth}}=0,8\text{ms}$: 5 slots). Under this conditions the FCCH detection time can never exceed the time of 660ms.
- (For a more general consideration t_{synth} may be considered as a sum of all delays before starting monitoring is possible).
- For detecting SCH instead of FCCH (for a parallel search) the same equation applies.
- In the equation before the dual synthesiser UE is included if the synthesiser switching time is 0ms.

Table A.2: FCCH detection time for a dual synthesizer UE monitoring GSM from TDD every TDD frame

occupied slots= 15-idle slots	cases	FCCH detection time in ms	
		Average	maximum
2	105	37	189
3	455	46	327
4	1365	58	419
5	3003	72	501
6	5005	90	646
7	6435	114	660
8	6435	144	660
9	5005	175	660
10	3003	203	660
11	1365	228	660
12	455	254	660
13	105	-	-
14	15	-	-

In the table above for a given number of occupied slots in the TDD mode all possible cases of distributions of these occupied TDD slots are considered (see "cases"). For every case arbitrary alignments of the TDD and the GSM frame structure are taken into account for calculating the average FCCH detection time (only these cases are used which guarantee FCCH detection for all alignments; only the non-parallel FCCH search is reflected by the detection times in the table 2).

The term "occupied slots" means that the UE is not able to monitor in these TDD slots.

For a synthesiser switching time of one or one half TDD timeslot the number of needed consecutive idle TDD timeslots is summarized in the table below:

Table A.3: Link between the synthesiser performance and the number of free consecutive TSs for guaranteed FCCH detection, needed for GSM monitoring

One-way switching time for the synthesiser	Number of free consecutive TDD timeslots needed in the frame for a guaranteed FCCH detection
1 TS (=2560 chips)	5
0.5 TS (=1280 chips)	4
0 (dual synthesiser)	3

A.2 Low data rate traffic using 1 uplink and 1 downlink slot (for the 1.28 Mcps option)

NOTE: The section evaluates the time to acquire the FCCH if all idle slots are devoted to the tracking of a FCCH burst, meaning that no power measurements is done concurrently. The derived figures are better than those for GSM. The section does not derive though any conclusion. A conclusion may be that the use of the idle slots is a valid option. An alternative conclusion may be that this is the only mode to be used, removing hence the use of the slotted frames for low data traffic or the need for a dual receiver, if we were to considering the monitoring of GSM cells only, rather than GSM, TDD and FDD.

If a single synthesiser UE uses only one uplink and one downlink slot, e.g. for speech communication, the UE is not in transmit or receive state during 5 slots in each frame. According to the timeslot numbers allocated to the traffic, this period can be split into two continuous idle intervals A and B as shown in the figure below.

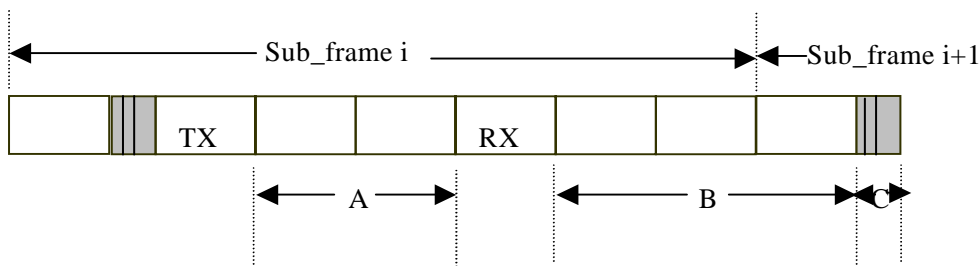


Figure A.2: Possible idle periods in a subframe with two occupied timeslots

A is defined as the number of idle slots between the Tx and Rx slots and B the number of idle slots between the Rx and Tx slots. It is clear that $A+B=5$ time slots and C is equal to the DwPTS+GP+UpPTS.

In the scope of low cost terminals, a [0.5] ms period is supposed to be required to perform a frequency jump from 1.28Mcps TDD to GSM and vice versa. This lets possibly two free periods of $A \cdot \text{Timeslots} - 1$ ms and $B \cdot \text{Timeslots} + C - 1$ ms during which the mobile station can monitor GSM, Timeslots being the slot period.

Following table evaluates the average synchronisation time and maximum synchronisation time, where the announced synchronisation time corresponds to the time needed to find the FCCH. The FCCH is supposed to be perfectly detected which means that it is entirely present in the monitoring window. The FCCH being found the SCH location is unambiguously known from that point. All the 5 idle slots and the DwPTS+GP+UpPTS are assumed to be devoted to FCCH tracking and the UL traffic is supposed to occupy the time slot 1.

Table A.4: example- of average and maximum synchronisation time with two busy timeslots per sub-frame and with 0.5 ms switching time

Downlink time slot number	Number of free Timeslots in A	Number of free Timeslots in B	Average synchronisation time (ms)	Maximum synchronisation time (ms)
0	5	0	83	231
2	0	5	75	186
3	1	4	98	232
4	2	3	185	558
5	3	2	288	656
6	4	1	110	371

(*) All simulations have been performed with a random initial delay between GSM frames and 1.28Mcps TDD sub-frames.

Each configuration of Timeslots allocation described above allows a monitoring period sufficient to acquire synchronisation.

NOTE: Considering about the frame structure of 1.28Mcps TDD, there are total 7 timeslots in each sub-frame that can be used as data traffic. If more than 1 uplink and/or 1 downlink TDD timeslot are used for data traffic, that means it will occupy at least 3 time slots, equal to $0.675 \cdot 3 = 2.205$ ms. And more time slots for traffic data means more switching point are needed to switch between the GSM and the 1.28Mcps TDD. As it was mentioned above, each switching will take 0.5ms. As a result, the idle time left for monitoring the GSM will be very little. So monitoring GSM from 1.28Mcps TDD under this situation will be considered in the future. It will need more carefully calculation and simulation.

A.2.1 Higher data rate traffic using more than 1 uplink and/or 1 downlink TDD timeslot (for 1.28Mcps TDD)

The minimum idle time to detect a complete FCCH burst for all possible alignments between the GSM and the 1.28Mcps TDD frame structure (called "guaranteed FCCH detection"), assuming that monitoring happens every sub-frame, can be calculated as follows (t_{FCCH} = one GSM slot):

$$t_{\min, \text{ guaranteed}} = 2 \times t_{\text{synth}} + t_{\text{FCCH}} + \frac{5 \text{ ms}}{13} = 2 \times t_{\text{synth}} + \frac{25 \text{ ms}}{26}$$

- (e.g for $t_{\text{synth}}=0\text{ms}$: 2 1.28Mcps TDD **consecutive** idle timeslots needed, for $t_{\text{synth}}=0.3\text{ms}$: 3 slots (or 2 slots and the DwPTS+GP+UpPTS), for $t_{\text{synth}}=0.5\text{ms}$: 3 slots, for $t_{\text{synth}}=0.8\text{ms}$: 4 slots). Under this conditions the FCCH detection time can never exceed the time of 660ms.
- (For a more general consideration t_{synth} may be considered as a sum of all delays before starting monitoring is possible).
- For detecting SCH instead of FCCH (for a parallel search) the same equation applies.
- In the equation before the dual synthesiser UE is included if the synthesiser switching time is 0ms.

Table A.5 : FCCH detection time for a single synthesizer UE monitoring GSM from 1.28Mcps TDD every sub-frame

Occupied Slots	Cases	AVERAGE FCCH detection time in ms	MAXIMUM FCCH detection time in ms
2	21	136.625	660.785
3	35	188.451	660.785
4	35	231.115	660.785
5	21	-	-
6	7	-	-
7	1	-	-

The result in the above table is based on the following assumption:

- A single synthesizer is used.
- A [0.5] ms period is supposed to be required to perform a frequency jump from 1.28Mcps TDD to GSM and vice versa.
- For a given number of occupied slots in the TDD mode all possible cases of distributions of these occupied TDD slots are considered (see "cases"). For every case arbitrary alignments of the TDD and the GSM frame structure are taken into account for calculating the average FCCH detection time (only these cases are used which guarantee FCCH detection for all alignments; only the non-parallel FCCH search is reflected by the detection times in the above table).

The term "occupied slots" means that the UE is not able to monitor in these TDD slots.

For a synthesiser switching time of one or one half TDD timeslot the number of needed consecutive idle TDD timeslots is summarized in the table below:

Table A.6 : Link between the synthesiser performance and the number of free consecutive Timeslots for guaranteed FCCH detection, needed for GSM monitoring

One-way switching time for the synthesiser	Number of free consecutive 1.28Mcps TDD timeslots needed in the sub-frame for a guaranteed FCCH detection
1 Timeslot (=864 chips)	4
0.5 Timeslot (=432 chips)	3
0 (dual synthesiser)	2

Annex B (informative): Change history

Change history							
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New
14/01/00	RAN_05	RP-99595	-	-	Approved at TSG RAN #5 and placed under Change Control	-	3.0.0
14/01/00	RAN_06	RP-99700	001	1	Primary and Secondary CCPCH in TDD	3.0.0	3.1.0
14/01/00	RAN_06	RP-99701	002	1	Block STTD capability for P-CCPCH, TDD component	3.0.0	3.1.0
14/01/00	RAN_06	RP-99700	003	1	Update concerning measurement definitions, ranges and mappings	3.0.0	3.1.0
14/01/00	-	-	-	-	Change history was added by the editor	3.1.0	3.1.1
31/03/00	RAN_07	RP-000071	004	1	Correction of CPICH measurements and "RX Timing Deviation" range	3.1.1	3.2.0
31/03/00	RAN_07	RP-000071	005	2	Editorial modifications to 25.225	3.1.1	3.2.0
31/03/00	RAN_07	RP-000071	006	1	Corrections to 25.225 Measurements for TDD	3.1.1	3.2.0
26/06/00	RAN_08	RP-000275	009	-	Clarifications on TxDiversity for UTRA TDD	3.2.0	3.3.0
26/06/00	RAN_08	RP-000275	010	-	Removal of Range/mapping	3.2.0	3.3.0
26/06/00	RAN_08	RP-000275	011	-	Removal of transport channel BLER	3.2.0	3.3.0
23/09/00	RAN_09	RP-000348	012	1	Alignment of TDD measurements with FDD : GPS related measurements	3.3.0	3.4.0
23/09/00	RAN_09	RP-000348	013	1	Alignment of TDD measurements with FDD :SFN-CFN observed time difference	3.3.0	3.4.0
23/09/00	RAN_09	RP-000348	014	-	Clarification of the Timeslot ISCP measurements	3.3.0	3.4.0
23/09/00	RAN_09	RP-000348	015	-	Terminology regarding the beacon function	3.3.0	3.4.0
23/09/00	RAN_09	RP-000348	016	-	Removal of Physical Channel BER	3.3.0	3.4.0
23/09/00	RAN_09	RP-000348	017	-	Update of TS25.225 due to recent change for FDD: Reporting of UTRAN TX carrier power	3.3.0	3.4.0
15/12/00	RAN_10	RP-000545	018	2	Corrections and Clarifications to 25.225	3.4.0	3.5.0
15/12/00	RAN_10	RP-000545	019	1	Corrections and Clarifications to 25.225	3.4.0	3.5.0
15/12/00	RAN_10	RP-000545	020	1	Clarification of measurement reference points	3.4.0	3.5.0
15/12/00	RAN_10	RP-000545	021	-	Removal of incorrect note relating to RSCP measurements	3.4.0	3.5.0
16/03/01	RAN_11	-	-	-	Approved as Release 4 specification (v4.0.0) at TSG RAN #11	3.5.0	4.0.0
16/03/01	RAN_11	RP-010066	023	-	Correction of the observed time difference to GSM measurement	3.5.0	4.0.0
16/03/01	RAN_11	RP-010073	022	-	Measurements for Node B synchronisation	3.5.0	4.0.0
16/03/01	RAN_11	RP-010071	024	1	Inclusion of 1.28Mcps TDD in TS 25.225	3.5.0	4.0.0
16/03/01	RAN_11	RP-010072	025	-	RTD measurement in UTRAN for UP-TDD	3.5.0	4.0.0
15/06/01	RAN_12	RP-010339	029	-	Renaming of LCS measurements	4.0.0	4.1.0
15/06/01	RAN_12	RP-010339	030	-	Addition to the abbreviation list	4.0.0	4.1.0
21/09/01	RAN_13	RP-010526	034	-	Clarification of the Beacon Measurement in TS25.225	4.1.0	4.2.0
21/09/01	RAN_13	RP-010707	031	1	RxTiming Deviation for 1.28 Mcps TDD	4.1.0	4.2.0
21/09/01	RAN_13	RP-010532	032	-	SFN-SFN type 1 for 1.28 Mcps TDD	4.1.0	4.2.0
14/12/01	RAN_14	RP-010743	036	1	Removal of references to Block STTD	4.2.0	4.3.0
14/12/01	RAN_14	RP-010743	040	-	Correction of measurement definition for UTRA Carrier RSSI and CPICH_Ec/No	4.2.0	4.3.0
14/12/01	RAN_14	RP-010750	038	1	Introduction of new 'UE GPS code phase' measurement	4.2.0	4.3.0
14/12/01	RAN_14	RP-010750	042	-	Corrections in annex A.2 in TS 25.225	4.2.0	4.3.0
08/03/02	RAN_15	RP-020055	041	1	Introduction of 'Node B synchronization for 1.28 Mcps TDD'	4.3.0	5.0.0
08/03/02	RAN_15	RP-020057	043	-	Introduction of 'UE Positioning Enhancements for 1.28 Mcps TDD'	4.3.0	5.0.0
07/06/02	RAN_16	RP-020312	050	2	Clarification of UE measurements Applicability	5.0.0	5.1.0
20/09/02	RAN_17	RP-020578	053	-	Correction to SFN-SFN Type 2 measurement	5.1.0	5.2.0
20/09/02	RAN_17	RP-020558	061	-	Correction of UE SFN-SFN type 1 measurement for TDD	5.1.0	5.2.0
22/12/02	RAN_18	RP-020844	064	-	Received Total Wide Band Power Measurement Definition	5.2.0	5.3.0
24/03/03	RAN_19	RP-030080	065	2	Addition of HS-SICH quality measurement for UTRA TDD	5.3.0	5.4.0
24/06/03	RAN_20	RP-030366	070	1	Power Measurement in non HSDPA codes for TDD	5.4.0	5.5.0
24/06/03	RAN_20	RP-030365	074	-	Correction of transmitted carrier power definition in case of Tx diversity	5.4.0	5.5.0
06/01/04	RAN_22	RP-030651	071	4	Definition of Transmitted Code Power and ISCP measurements in the case of antenna diversity for TDD	5.5.0	5.6.0
13/01/04	RAN_22	-	-	-	created for M.1457 update	5.6.0	6.0.0
23/03/04	RAN_23	RP-040088	069	1	Interference measurement in UpPTS for 1.28Mcps TDD	6.0.0	6.1.0
23/03/04	RAN_23	RP-040084	078	1	Clarification of TA definition for 1.28Mcps TDD	6.0.0	6.1.0
20/03/06	RAN_31	RP-060079	0079	-	Introduction of 7.68Mcps TDD option	6.1.0	7.0.0
12/06/06	RAN_32	RP-060294	0081	-	Clarify the reference point for LCR TDD TA	7.0.0	7.1.0
29/09/06	RAN_33	RP-060492	0083	-	Introduction of E-DCH for 3.84Mcps and 7.68Mcps TDD	7.1.0	7.2.0
07/03/07	RAN_35	RP-070120	087	-	Physical layerspecification of UE Power Headroom measurement	7.2.0	7.3.0
07/03/07	RAN_35	RP-070118	086	-	Introduction of E-DCH for 1.28Mcps TDD	7.2.0	7.3.0
13/03/07	RAN_35	RP-070113	085	1	Modification on the HS-SICH reception quality of HS-SICH for LCR TDD	7.2.0	7.3.0
11/09/07	RAN_37	RP-070650	088	-	Introduction of multi-frequency operation for 1.28Mcps TDD	7.3.0	7.4.0

Change history							
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New
04/03/08	RAN_39	-	-	-	Creation of Release 8 further to RAN_39 decision	7.4.0	8.0.0
09/09/08	RAN_41	RP-080667	0089	-	E-UTRA measurements for UTRA TDD – E-UTRA interworking	8.0.0	8.1.0
03/03/09	RAN_43	RP-090232	0091	2	RSRP and RSRQ Measurement Definitions	8.1.0	8.2.0
15/09/09	RAN_45	RP-090888	0092	-	Clarification on reference point of RSRP and RSRQ for EUTRA	8.2.0	8.3.0
15/09/09	RAN_45	RP-090891	0093	-	Clarification of UE measurement definitions for RX diversity of LCR TDD	8.2.0	8.3.0
01/12/09	RAN_46	RP-091175	0094	3	Introduction of Cell Portion for 1.28 Mcps TDD	8.3.0	9.0.0
16/03/10	RAN_47	RP-100205	0095	1	Modification of RSRQ definition	9.0.0	9.1.0
01/06/10	RAN_48	RP-100584	0098	-	Correction to the reference table number for nominal maximum output power for 1.28Mcps TDD	9.1.0	9.2.0

History

Document history		
V9.0.0	January 2010	Publication
V9.1.0	April 2010	Publication
V9.2.0	June 2010	Publication