



**Digital cellular telecommunications system (Phase 2+) (GSM);  
Universal Mobile Telecommunications System (UMTS);  
LTE;  
5G;  
Mandatory Speech Codec speech processing functions;  
Adaptive Multi-Rate (AMR) speech codec;  
Error concealment of lost frames  
(3GPP TS 26.091 version 17.0.0 Release 17)**



---

**Reference**

RTS/TSGS-0426091vh00

---

**Keywords**

5G,GSM,LTE,UMTS

**ETSI**

---

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

---

**Important notice**

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at [www.etsi.org/deliver](http://www.etsi.org/deliver).

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our  
Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

---

**Notice of disclaimer & limitation of liability**

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

---

**Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2022.  
All rights reserved.

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

---

# Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

# Contents

Intellectual Property Rights .....	2
Legal Notice .....	2
Modal verbs terminology.....	2
Foreword.....	4
1 Scope .....	5
2 References .....	5
3 Definitions and abbreviations.....	5
3.1 Definitions .....	5
3.2 Abbreviations .....	5
4 General .....	6
5 Requirements.....	6
5.1 Error detection.....	6
5.2 Lost speech frames .....	6
5.3 First lost SID frame .....	6
5.4 Subsequent lost SID frames.....	6
6 Example ECU/BFH Solution 1 .....	6
6.1 State Machine .....	7
6.2 Assumed Active Speech Frame Error Concealment Unit Actions .....	8
6.2.1 BFI = 0, prevBFI = 0, State = 0 .....	8
6.2.2 BFI = 0, prevBFI = 1, State = 0 or 5 .....	8
6.2.3 BFI = 1, prevBFI = 0 or 1, State = 1...6.....	9
6.2.3.1 LTP-lag update.....	9
6.2.3.2 Innovation sequence.....	9
6.3 Assumed Non-Active Speech Signal Error Concealment Unit Actions .....	10
6.3.1 General.....	10
6.3.2 Detectors.....	10
6.3.2.1 Background detector .....	10
6.3.2.2 Voicing detector .....	10
6.3.3 Background ECU Actions .....	10
6.4 Substitution and muting of lost SID frames .....	10
7 Example ECU/BFH Solution 2 .....	11
7.1 State Machine .....	11
7.2 Substitution and muting of lost speech frames .....	11
7.2.1 BFI = 0, prevBFI = 0, State = 0 .....	11
7.2.2 BFI = 0, prevBFI = 1, State = 0 or 5 .....	11
7.2.3 BFI = 1, prevBFI = 0 or 1, State = 1...6.....	12
7.2.3.1 LTP-lag update.....	12
7.2.4 Innovation sequence .....	12
7.3 Substitution and muting of lost SID frames .....	12
<b>Annex A (informative): Change history .....</b>	<b>13</b>
History .....	14

---

# Foreword

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

---

# 1 Scope

The present document defines an error concealment procedure, also termed frame substitution and muting procedure, which shall be used by the AMR speech codec receiving end when one or more lost speech or lost Silence Descriptor (SID) frames are received.

The requirements of the present document are mandatory for implementation in all networks and User Equipment (UE)s capable of supporting the AMR speech codec. It is not mandatory to follow the bit exact implementation outlined in the present document and the corresponding C source code.

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TS 26.102: "AMR Speech Codec; Interface to Iu and Uu".
- [2] 3GPP TS 26.090: "Transcoding functions".
- [3] 3GPP TS 26.093: "Source Controlled Rate operation".
- [4] 3GPP TS 26.101: "Frame Structure".

---

# 3 Definitions and abbreviations

## 3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

**N-point median operation:** consists of sorting the N elements belonging to the set for which the median operation is to be performed in an ascending order according to their values, and selecting the  $(\text{int}(N/2) + 1)$ -th largest value of the sorted set as the median value

Further definitions of terms used in the present document can be found in the references.

## 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AN	Access Network
BFH	Bad Frame Handling
BFI	Bad Frame Indication from AN
BSI_netw	Bad Sub-block Indication obtained from AN interface CRC checks
CRC	Cyclic Redundancy Check
ECU	Error Concealment Unit
medianN	N-point median operation
PDFI	Potentially Degraded Frame Indication
prevBFI	Bad Frame Indication of previous frame

RX	Receive
SCR	Source Controlled Rate (operation)
SID	Silence Descriptor frame (Background descriptor)

---

## 4 General

The purpose of the error concealment procedure is to conceal the effect of lost AMR speech frames. The purpose of muting the output in the case of several lost frames is to indicate the breakdown of the channel to the user and to avoid generating possible annoying sounds as a result from the error concealment procedure.

The network shall indicate lost speech or lost SID frames by setting the RX\_TYPE values [3] to SPEECH\_BAD or SID\_BAD. If these flags are set, the speech decoder shall perform parameter substitution to conceal errors.

The network should also indicate potentially degraded frames using the flag RX\_TYPE value SPEECH\_PROBABLY\_DEGRADED. This flag may be derived from channel quality indicators. It may be used by the speech decoder selectively depending on the estimated signal type.

The example solutions provided in paragraphs 6 and 7 apply only to bad frame handling on a complete speech frame basis. Sub-frame based error concealment may be derived using similar methods.

---

## 5 Requirements

### 5.1 Error detection

If the most sensitive bits of the AMR speech data (class A in [4]) are received in error, the network shall indicate RX\_TYPE = SPEECH\_BAD in which case the BFI flag is set. If a SID frame is received in error, the network shall indicate RX\_TYPE = SID\_BAD in which case the BFI flag is also set. The RX\_TYPE = SPEECH\_PROBABLY\_DEGRADED flag should be set appropriately using quality information from the channel decoder, in which case the PDFI flag is set.

### 5.2 Lost speech frames

Normal decoding of lost speech frames would result in very unpleasant noise effects. In order to improve the subjective quality, lost speech frames shall be substituted with either a repetition or an extrapolation of the previous good speech frame(s). This substitution is done so that it gradually will decrease the output level, resulting in silence at the output. Clauses 6, and 7 provide example solutions.

### 5.3 First lost SID frame

A lost SID frame shall be substituted by using the SID information from earlier received valid SID frames and the procedure for valid SID frames be applied as described in [3].

### 5.4 Subsequent lost SID frames

For many subsequent lost SID frames, a muting technique shall be applied to the comfort noise that will gradually decrease the output level. For subsequent lost SID frames, the muting of the output shall be maintained. Clauses 6 and 7 provide example solutions.

---

## 6 Example ECU/BFH Solution 1

The C code of the following example is embedded in the bit exact software of the codec. In the code the ECU is designed to allow subframe-by-subframe synthesis, thereby reducing the speech synthesis delay to a minimum.

## 6.1 State Machine

This example solution for substitution and muting is based on a state machine with seven states (Figure 1).

The system starts in state 0. Each time a bad frame is detected, the state counter is incremented by one and is saturated when it reaches 6. Each time a good speech frame is detected, the state counter is reset to zero, except when we are in state 6, where we set the state counter to 5. The state indicates the quality of the channel: the larger the value of the state counter, the worse the channel quality is. The control flow of the state machine can be described by the following C code (**BFI** = bad frame indicator, **State** = state variable):

```
if(BFI != 0 )
    State = State + 1;
else if(State == 6)
    State = 5;
else
    State = 0;
if(State > 6 )
    State = 6;
```

In addition to this state machine, the **Bad Frame Flag** from the previous frame is checked (**prevBFI**). The processing depends on the value of the **State**-variable. In states 0 and 5, the processing depends also on the two flags **BFI** and **prevBFI**.



The procedure can be described as follows:

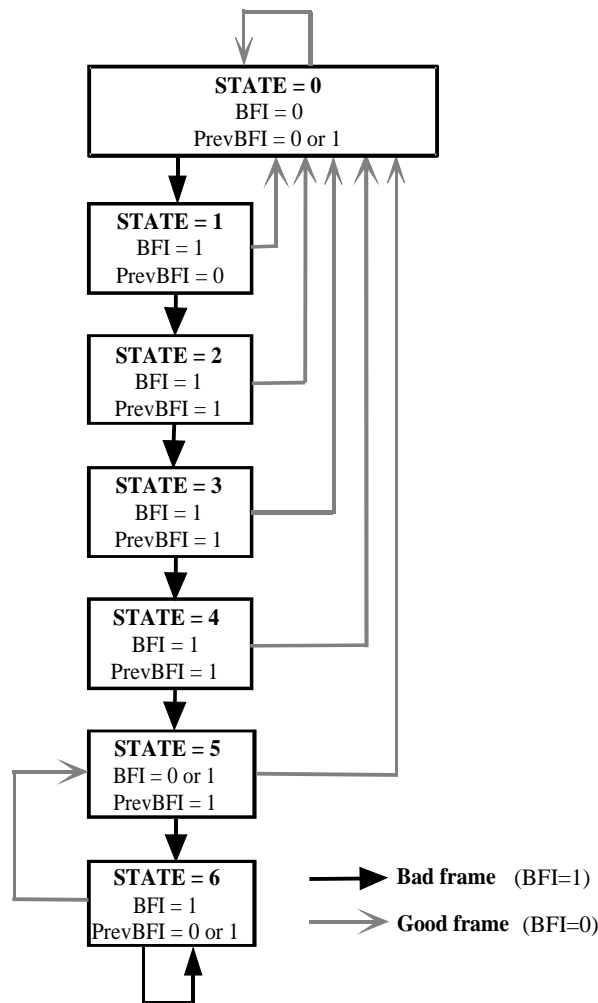


Figure 1: State machine for controlling the bad frame substitution

## 6.2 Assumed Active Speech Frame Error Concealment Unit Actions

### 6.2.1 BFI = 0, prevBFI = 0, State = 0

No error is detected in the received or in the previous received speech frame. The received speech parameters are used in the normal way in the speech synthesis. The current frame of speech parameters is saved.

### 6.2.2 BFI = 0, prevBFI = 1, State = 0 or 5

No error is detected in the received speech frame, but the previous received speech frame was bad. The LTP gain and fixed codebook gain are limited below the values used for the last received good

$$\text{subframe: } g^p = \begin{cases} g^p, & g^p \leq g^p(-1) \\ g^p(-1), & g^p > g^p(-1) \end{cases} \quad (1)$$

where  $g^p$  = current decoded LTP gain,  $g^p(-1)$  = LTP gain used for the last good subframe (BFI = 0), and

$$g^c = \begin{cases} g^c, & g^c \leq g^c(-1) \\ g^c(-1), & g^c > g^c(-1) \end{cases} \quad (2)$$

where  $g^c$  = current decoded fixed codebook gain and  $g^c(-1)$  = fixed codebook gain used for the last good subframe (BFI = 0).

The rest of the received speech parameters are used normally in the speech synthesis. The current frame of speech parameters is saved.

### 6.2.3 BFI = 1, prevBFI = 0 or 1, State = 1..6

An error is detected in the received speech frame and the substitution and muting procedure is started. The LTP gain and fixed codebook gain are replaced by attenuated values from the previous subframes:

$$g^p = \begin{cases} P(state) g^p(-1), & g^p(-1) \leq \text{median5}(g^p(-1), \dots, g^p(-5)) \\ P(state) \text{median5}(g^p(-1), \dots, g^p(-5)), & g^p(-1) > \text{median5}(g^p(-1), \dots, g^p(-5)) \end{cases} \quad (3)$$

where  $g^p$  = current decoded LTP gain,  $g^p(-1), \dots, g^p(-n)$  = LTP gains used for the last n subframes,  $\text{median5}()$  = 5-point median operation,  $P(state)$  = attenuation factor ( $P(1) = 0.98$ ,  $P(2) = 0.98$ ,  $P(3) = 0.8$ ,  $P(4) = 0.3$ ,  $P(5) = 0.2$ ,  $P(6) = 0.2$ ),  $state$  = state number, and

$$g^c = \begin{cases} C(state) g^c(-1), & g^c(-1) \leq \text{median5}(g^c(-1), \dots, g^c(-5)) \\ C(state) \text{median5}(g^c(-1), \dots, g^c(-5)), & g^c(-1) > \text{median5}(g^c(-1), \dots, g^c(-5)) \end{cases} \quad (4)$$

where  $g^c$  = current decoded fixed codebook gain,  $g^c(-1), \dots, g^c(-n)$  = fixed codebook gains used for the last n subframes,  $\text{median5}()$  = 5-point median operation,  $C(state)$  = attenuation factor ( $C(1) = 0.98$ ,  $C(2) = 0.98$ ,  $C(3) = 0.98$ ,  $C(4) = 0.98$ ,  $C(5) = 0.98$ ,  $C(6) = 0.7$ ), and  $state$  = state number.

The higher the state value is, the more the gains are attenuated. Also the memory of the predictive fixed codebook gain is updated by using the average value of the past four values in the memory:

$$\text{ener}(0) = \frac{1}{4} \sum_{i=1}^4 \text{ener}(-i) \quad (5)$$

The past LSFs are shifted towards their mean:

$$\text{lsf}_q1(i) = \text{lsf}_q2(i) = \alpha \text{past\_lsf}_q(i) + (1 - \alpha) \text{mean\_lsf}(i), \quad i = 0..9 \quad (6)$$

where  $\alpha = 0.95$ ,  $\text{lsf}_q1$  and  $\text{lsf}_q2$  are two sets of LSF-vectors for current frame,  $\text{past\_lsf}_q$  is  $\text{lsf}_q2$  from the previous frame, and  $\text{mean\_lsf}$  is the average LSF-vector. Note that two sets of LSFs are available only in the 12.2 mode.

#### 6.2.3.1 LTP-lag update

The LTP-lag values are replaced by the past value from the 4th subframe of the previous frame (12.2 mode) or slightly modified values based on the last correctly received value (all other modes).

#### 6.2.3.2 Innovation sequence

The received fixed codebook innovation pulses from the erroneous frame are used in the state in which they were received when corrupted data are received. In the case when no data were received random fixed codebook indices should be employed.

## 6.3 Assumed Non-Active Speech Signal Error Concealment Unit Actions

### 6.3.1 General

The Non-Active Speech ECU is used to reduce the negative impact of amplitude variations and tonal artefacts when using the conventional Active Speech ECU in non-voiced signals such as background noise and unvoiced speech. The background ECU actions are only used for the lower rate Speech Coding modes.

The Non-Active Speech ECU actions are done as postprocessing actions of the Active Speech ECU, actions thus ensuring that the Active Speech ECU states are continuously updated. This will guarantee instant and seamless switching to the Active Speech ECU. The detectors and state updates have to be running continuously for all speech coding modes to avoid switching problems.

Only the differences to the Active Speech ECU are stated below.

### 6.3.2 Detectors

#### 6.3.2.1 Background detector

An energy level and energy change detector is used to monitor the signal. If the signal is considered to contain background noise and only shows minor energy level changes, a flag is set. The resulting indicator is the **inBackgroundNoise** flag which indicates the signal state of the previous frame.

#### 6.3.2.2 Voicing detector

The received LTP gain is monitored and used to prevent the use of the background ECU actions in possibly voiced segments. A median filtered LTP gain value with a varying filter memory length is thresholded to provide the correct voicing decision. Additionally, a counter **voicedHangover** is used to monitor the time since a frame was presumably voiced.

### 6.3.3 Background ECU Actions

The BFI, and DFI indications are used together with the flag **inBackgroundNoise** and the counter **voicedHangover** to adjust the LTP part and the innovation part of the excitation. The actions are only taken if the previous frame has been classified as background noise and sufficient time has passed since the last voiced frame was detected.

The background ECU actions are: energy control of the excitation signal, relaxed LTP lag control, stronger limitation of the LTP gain, adjusted adaptation of the Gain-Contour-Smoothing algorithm and modified adaptation of the Anti-Sparseness Procedure.

## 6.4 Substitution and muting of lost SID frames

In the speech decoder a single frame classified as SID\_BAD shall be substituted by the last valid SID frame information and the procedure for valid SID frames be applied. If the time between SID information updates (updates are specified by SID\_UPDATE arrivals and occasionally by SID\_FIRST arrivals see 06.92) is greater than one second this shall lead to attenuation.

## 7 Example ECU/BFH Solution 2

This is an alternative example solution which is a simplified version of Example ECU/BFH Solution 1.

### 7.1 State Machine

This example solution for substitution and muting is based on a state machine with seven states (Figure 1, same state machine as in Example 1).

The system starts in state 0. Each time a bad frame is detected, the state counter is incremented by one and is saturated when it reaches 6. Each time a good speech frame is detected, the state counter is reset to zero, except when we are in state 6, where we set the state counter to 5. The state indicates the quality of the channel: the larger the state counter, the worse the channel quality is. The control flow of the state machine can be described by the following C code (**BFI** = bad frame indicator, **State** = state variable):

```

if(BFI != 0 )
    State = State + 1;
else if(State == 6)
    State = 5;
else
    State = 0;
if(State > 6 )
    State = 6;

```

In addition to this state machine, the **Bad Frame Flag** from the previous frame is checked (**prevBFI**). The processing depends on the value of the **State**-variable. In states 0 and 5, the processing depends also on the two flags **BFI** and **prevBFI**.

### 7.2 Substitution and muting of lost speech frames

#### 7.2.1 BFI = 0, prevBFI = 0, State = 0

No error is detected in the received or in the previous received speech frame. The received speech parameters are used normally in the speech synthesis. The current frame of speech parameters is saved.

#### 7.2.2 BFI = 0, prevBFI = 1, State = 0 or 5

No error is detected in the received speech frame but the previous received speech frame was bad. The LTP gain and fixed codebook gain are limited below the values used for the last received good subframe:

$$g^p = \begin{cases} g^p, & g^p \leq g^p(-1) \\ g^p(-1), & g^p > g^p(-1) \end{cases} \quad (7)$$

where  $g^p$  = current decoded LTP gain,  $g^p(-1)$  = LTP gain used for the last good subframe (BFI = 0), and

$$g^c = \begin{cases} g^c, & g^c \leq g^c(-1) \\ g^c(-1), & g^c > g^c(-1) \end{cases} \quad (8)$$

where  $g^c$  = current decoded fixed codebook-gain and  $g^c(-1)$  = fixed codebook gain used for the last good subframe (BFI = 0).

The rest of the received speech parameters are used normally in the speech synthesis. The current frame of speech parameters is saved.

### 7.2.3 BFI = 1, prevBFI = 0 or 1, State = 1...6

An error is detected in the received speech frame and the substitution and muting procedure is started. The LTP gain and fixed codebook gain are replaced by attenuated values from the previous subframes:

$$g^p = \begin{cases} P(state) g^p(-1), & g^p(-1) \leq \text{median5}(g^p(-1), \dots, g^p(-5)) \\ P(state) \text{median5}(g^p(-1), \dots, g^p(-5)), & g^p(-1) > \text{median5}(g^p(-1), \dots, g^p(-5)) \end{cases} \quad (9)$$

where  $g^p$  = current decoded LTP gain,  $g^p(-1), \dots, g^p(-n)$  = LTP gains used for the last  $n$  subframes,  $\text{median5}()$  = 5-point median operation,  $P(state)$  = attenuation factor ( $P(1) = 0.98, P(2) = 0.98, P(3) = 0.8, P(4) = 0.3, P(5) = 0.2, P(6) = 0.2$ ),  $state$  = state number, and

$$g^c = \begin{cases} C(state) g^c(-1), & g^c(-1) \leq \text{median5}(g^c(-1), \dots, g^c(-5)) \\ C(state) \text{median5}(g^c(-1), \dots, g^c(-5)), & g^c(-1) > \text{median5}(g^c(-1), \dots, g^c(-5)) \end{cases} \quad (10)$$

where  $g^c$  = current decoded fixed codebook gain,  $g^c(-1), \dots, g^c(-n)$  = fixed codebook gains used for the last  $n$  subframes,  $\text{median5}()$  = 5-point median operation,  $C(state)$  = attenuation factor ( $C(1) = 0.98, C(2) = 0.98, C(3) = 0.98, C(4) = 0.98, C(5) = 0.98, C(6) = 0.7$ ), and  $state$  = state number.

The higher the state value is, the more the gains are attenuated. Also the memory of the predictive fixed codebook gain is updated by using the average value of the past four values in the memory:

$$\text{ener}(0) = \frac{1}{4} \sum_{i=1}^4 \text{ener}(-i) \quad (11)$$

The past LSFs are used by shifting their values towards their mean:

$$\text{lsf}_q1(i) = \text{lsf}_q2(i) = \alpha \text{past\_lsf}_q(i) + (1 - \alpha) \text{mean\_lsf}(i), \quad i = 0..9 \quad (12)$$

where  $\alpha = 0.95$ ,  $\text{lsf}_q1$  and  $\text{lsf}_q2$  are two sets of LSF-vectors for current frame,  $\text{past\_lsf}_q$  is  $\text{lsf}_q2$  from the previous frame, and  $\text{mean\_lsf}$  is the average LSF-vector. Note that two sets of LSFs are available only in the 12.2 mode.

#### 7.2.3.1 LTP-lag update

The LTP-lag values are replaced by the past value from the 4th subframe of the previous frame (12.2 mode) or slightly modified values based on the last correctly received value (all other modes).

### 7.2.4 Innovation sequence

The received fixed codebook innovation pulses from the erroneous frame are used in the state in which they were received when corrupted data are received. In the case when no data were received random fixed codebook indices should be employed.

## 7.3 Substitution and muting of lost SID frames

In the speech decoder a single frame classified as SID\_BAD shall be substituted by the last valid SID frame information and the procedure for valid SID frames be applied. If the time between SID information updates (updates are specified by SID\_UPDATE arrivals and occasionally by SID\_FIRST arrivals) is greater than one second this shall lead to attenuation.

## Annex A (informative): Change history

Tdoc	SPEC	CR	RE	VER	SUBJECT	CAT	NEW
SP-99570	26.091	A001		3.0.1	Use of random excitation when RX_NODATA and not in DTX	F	3.1.0
Change history							
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New
03-2001	11				Version for Release 4		4.0.0
06-2002	16				Version for Release 5	4.0.0	5.0.0
12-2004	26				Version for Release 6	5.0.0	6.0.0
06-2007	36				Version for Release 7	6.0.0	7.0.0
12-2008	42				Version for Release 8	7.0.0	8.0.0
12-2009	46				Version for Release 9	8.0.0	9.0.0
03-2011	51				Version for Release 10	9.0.0	10.0.0
09-2012	57				Version for Release 11	10.0.0	11.0.0
09-2014	65				Version for Release 12	11.0.0	12.0.0
12-2015	70				Version for Release 13	12.0.0	13.0.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2017-03	75					Version for Release 14	14.0.0
2018-06	80					Version for Release 15	15.0.0
2020-07	-	-	-	-	-	Update to Rel-16 version (MCC)	<b>16.0.0</b>
2022-04	-	-	-	-	-	Update to Rel-17 version (MCC)	<b>17.0.0</b>

---

# History

<b>Document history</b>		
V17.0.0	May 2022	Publication