

ETSI TS 126 191 V19.0.0 (2025-10)



**Digital cellular telecommunications system (Phase 2+) (GSM);
Universal Mobile Telecommunications System (UMTS);
LTE;
5G;
Speech codec speech processing functions;
Adaptive Multi-Rate - Wideband (AMR-WB) speech codec;
Error concealment of erroneous or lost frames
(3GPP TS 26.191 version 19.0.0 Release 19)**



ReferenceRTS/TSGS-0426191vj00

Keywords5G, GSM, LTE, UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from the
[ETSI Search & Browse Standards application](#).

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver repository](#).

Users should be aware that the present document may be revised or have its status changed,
this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to
the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our
[Coordinated Vulnerability Disclosure \(CVD\)](#) program.

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2025.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the [ETSI IPR online database](#).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found at [3GPP to ETSI numbering cross-referencing](#).

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	4
1 Scope	5
2 Normative references	5
3 Definitions and abbreviations.....	5
3.1 Definitions.....	5
3.2 Abbreviations	5
4 General	6
5 Requirements.....	6
5.1 Error detection.....	6
5.2 Erroneous or lost speech frames.....	6
5.3 First lost SID frame	6
5.4 Subsequent lost SID frames.....	6
6 Example ECU/BFH Solution	6
6.1 State Machine.....	6
6.2 Substitution and muting of erroneous/lost speech frames	8
6.2.1 BFI = 0, prevBFI = 0, State = 0 or 1	8
6.2.2 BFI = 0, prevBFI = 1, State = 0 to 3	9
6.2.3 BFI = 1, prevBFI = 0 or 1, State = 1...6.....	9
6.2.3.1 LTP gain & fixed codebook gain concealment when RX_FRAME TYPE = SPEECH_BAD	9
6.2.3.2 LTP gain & fixed codebook gain concealment when RX_FRAME TYPE = SPEECH_LOST	10
6.2.3.3 ISF concealment.....	10
6.2.3.4 LTP-lag concealment	11
6.2.3.4.1 LTP-lag concealment when RX_FRAME TYPE = SPEECH_BAD.....	11
6.2.3.4.2 LTP-lag concealment when RX_FRAME TYPE = SPEECH_LOST	12
6.2.4 Innovation sequence	12
6.2.5 High-band gain (for 23.85 kbit/s mode).....	12
6.3 Substitution and muting of lost SID frames	13
Annex A (informative): Change history	14
History	15

Foreword

This Technical Specification has been produced by the 3GPP.

The present document defines an error concealment procedure, also termed frame substitution and muting procedure, of the wideband telephony speech service employing the Adaptive Multi-Rate – Wideband (AMR-WB) speech coder within the 3GPP system.

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of this TS, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 Indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the specification;

1 Scope

This specification defines an error concealment procedure, also termed frame substitution and muting procedure, which shall be used by the AMR-WB speech codec receiving end when one or more erroneous/lost speech or lost Silence Descriptor (SID) frames are received.

The requirements of this document are mandatory for implementation in all networks and User Equipment (UE)s capable of supporting the AMR-WB speech codec. It is not mandatory to follow the bit exact implementation outlined in this document and the corresponding C source code.

2 Normative references

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TS 26.202"AMR Wideband Speech Codec; Interface to RAN".
- [2] 3GPP TS 26.190"AMR Wideband Speech Codec; Transcoding functions".
- [3] 3GPP TS 26.193"AMR Wideband Speech Codec; Source Controlled Rate operation".
- [4] 3GPP TS 26.201"AMR Wideband Speech Codec; Frame structure".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of this document, the following definition applies:

N-point median operation: Consists of sorting the N elements belonging to the set for which the median operation is to be performed in an ascending order according to their values, and selecting the $(\text{int}(N/2) + 1)$ -th largest value of the sorted set as the median value.

Further definitions of terms used in this document can be found in the references.

3.2 Abbreviations

For the purposes of this document, the following abbreviations apply:

AMR-WB	Adaptive Multi Rate - WideBand
AN	Access Network
BFI	Bad Frame Indication from AN
BSI_netw	Bad Sub-block Indication obtained from AN interface CRC checks
prevBFI	Bad Frame Indication of previous frame
RX	Receive
SCR	Source Controlled Rate (operation)
SID	Silence Descriptor frame (Background noise)
CRC	Cyclic Redundancy Check
ECU	Error Concealment Unit

BFH	Bad Frame Handling
medianN	N-point median operation

4 General

The purpose of the error concealment procedure is to conceal the effect of erroneous/lost AMR-WB speech frames. The purpose of muting the output in the case of several erroneous/lost frames is to indicate the breakdown of the channel to the user and to avoid generating possible annoying sounds as a result from the error concealment procedure.

The network shall indicate erroneous/lost speech or lost SID frames by setting the RX_TYPE values [3] to SPEECH_BAD, SID_BAD or SPEECH_LOST. If these flags are set, the speech decoder shall perform parameter substitution to conceal errors.

The example solution provided in paragraph 6 apply only to bad frame handling on a complete speech frame basis. Sub-frame based error concealment may be derived using similar methods.

5 Requirements

5.1 Error detection

If the most sensitive bits of the AMR-WB speech data (class A in [4]) are received in error, the network shall indicate RX_TYPE = SPEECH_BAD in which case the BFI flag is set. When the frame is not received, the network shall indicate RX_TYPE = RX_SPEECH_LOST in which case the BFI flag is set as well. If a SID frame is received in error, the network shall indicate RX_TYPE = SID_BAD..

5.2 Erroneous or lost speech frames

Normal decoding of erroneous/lost speech frames would result in very unpleasant noise effects. In order to improve the subjective quality, erroneous/lost speech frames shall be substituted with either a repetition or an extrapolation of the previous good speech frame(s). This substitution is done so that it gradually will decrease the output level, resulting in silence at the output. Subclause 6 provides example solution.

5.3 First lost SID frame

A lost SID frame shall be substituted by using the SID information from earlier received valid SID frames and the procedure for valid SID frames be applied as described in [3].

5.4 Subsequent lost SID frames

For many subsequent lost SID frames, a muting technique shall be applied to the comfort noise that will gradually decrease the output level. For subsequent lost SID frames, the muting of the output shall be maintained. Subclause 6 provides example solutions.

6 Example ECU/BFH Solution

6.1 State Machine

This example solution for substitution and muting is based on a state machine with seven states (Figure 1).

The system starts in state 0. Each time a bad frame is detected, the state counter is incremented by one and is saturated when it reaches 6. Each time a good speech frame is detected, the state counter is right-shifted by one. The state

indicates the quality of the channel: the larger the value of the state counter, the worse the channel quality is. The control flow of the state machine can be described by the following C code (**BFI** = bad frame indicator, **State** = state variable):

```
if(BFI != 0 )
    State = State + 1;
    if(State > 6)
        State = 6;
else
    State = State >> 1;
```

In addition to this state machine, the **Bad Frame Flag** from the previous frame is checked (**prevBFI**). The processing depends on the value of the **State**-variable. In states 0 and 6, the processing depends on the **BFI** flag.

The procedure can be described as follows:

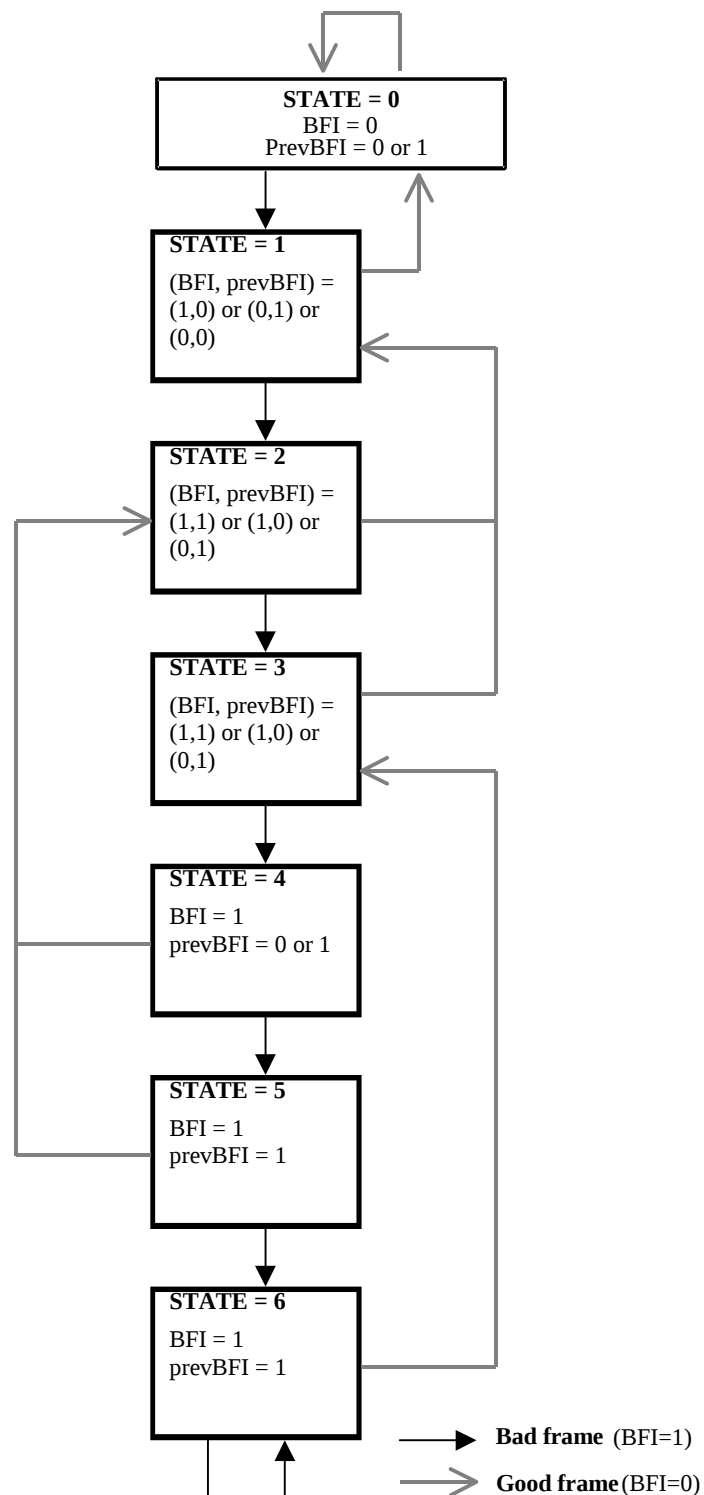


Figure 1: State machine for controlling the bad frame substitution

6.2 Substitution and muting of erroneous/lost speech frames

6.2.1 BFI = 0, prevBFI = 0, State = 0 or 1

No error is detected in the received or in the previous received speech frame. The received speech parameters are used normally in the speech synthesis. The current frame of speech parameters is saved.

6.2.2 BFI = 0, prevBFI = 1, State = 0 to 3

No error is detected in the received speech frame but the previous received speech frame was bad. The LTP gain is used normally in the speech synthesis and fixed codebook gain are limited below the values used for the last received good subframe:

$$g^c(n) = \begin{cases} g_{received}^c & , g_{received}^c \leq 100 \text{ or } g_{received}^c \leq g^c(n-1) \times 1.25 \\ 1.25 * g^c(n-1) & , \text{otherwise} \end{cases} \quad (1)$$

where

$g_{received}^c$ = current decoded fixed codebook-gain

$g^c(n-1)$ = fixed codebook gain used for the last good subframe (BFI = 0)

$g^c(n)$ = fixed codebook gain to be used for the current frame.

The rest of the received speech parameters are used normally in the speech synthesis. The current frame of speech parameters is saved.

6.2.3 BFI = 1, prevBFI = 0 or 1, State = 1...6

An error is detected in the received speech frame and the substitution and muting procedure is started.

6.2.3.1 LTP gain & fixed codebook gain concealment when RX_FRAME_TYPE = SPEECH_BAD

The LTP gain g^p and fixed codebook gain g^c are replaced by attenuated values from the previous subframes:

$$g^p = P^p(state) * median5(g^p(n-1), ..., g^p(n-5)) \quad (2)$$

$$g^c = \begin{cases} P^c(state) * median5(g^c(n-1), ..., g^c(n-5)) & , VAD_HIST \leq 2 \\ median5(g^c(n-1), ..., g^c(n-5)) & , VAD_HIST > 2 \end{cases} \quad (3)$$

where:

g^p = current decoded LTP gain,

g^c = current decoded fixed codebook gain,

$g^p(n-1), ..., g^p(n-5)$ = LTP gains used for the last 5 subframes,

$g^c(n-1), ..., g^c(n-5)$ = fixed codebook gains used for the last 5 subframes,

$median5()$ = 5-point median operation,

$P^p(state)$ = attenuation factor ($P^p(1) = 0.98$, $P^p(2) = 0.96$, $P^p(3) = 0.75$, $P^p(4) = 0.23$, $P^p(5) = 0.05$,
 $P^p(6) = 0.01$),

$P^c(state)$ = attenuation factor ($P^c(1) = 0.98$, $P^c(2) = 0.98$, $P^c(3) = 0.98$, $P^c(4) = 0.98$, $P^c(5) = 0.98$,
 $P^c(6) = 0.70$),

$state$ = state number {0..6},

VAD_HIST is number of consecutive VAD=0 decisions.

The higher the state value is, the more the gains are attenuated. Also the memory of the predictive fixed codebook gain is updated by using the average value of the past four values in the memory:

$$ener(0) = \frac{1}{4} \left[\sum_{i=1}^4 ener(n-i) \right] - 3 \quad (4)$$

6.2.3.2 LTP gain & fixed codebook gain concealment when RX_FRAME_TYPE = SPEECH_LOST

The LTP gain g^p and fixed codebook gain g^c are replaced by attenuated values from the previous subframes:

$$g^p = P^p(\text{state}) * \text{median5}(g^p(n-1), \dots, g^p(n-5)) \quad (5)$$

$$g^c = \begin{cases} P^c(\text{state}) * \text{median5}(g^c(n-1), \dots, g^c(n-5)) & , \text{VAD_HIST} \leq 2 \\ \text{median5}(g^c(n-1), \dots, g^c(n-5)) & , \text{VAD_HIST} > 2 \end{cases} \quad (6)$$

where:

g^p = current decoded LTP gain,

g^c = current decoded fixed codebook gain,

$g^p(n-1), \dots, g^p(n-5)$ = LTP gains used for the last 5 subframes,

$g^c(n-1), \dots, g^c(n-5)$ = fixed codebook gains used for the last 5 subframes,

$\text{median5}()$ = 5-point median operation,

$P^p(\text{state})$ = attenuation factor ($P^p(1) = 0.95$, $P^p(2) = 0.90$, $P^p(3) = 0.75$, $P^p(4) = 0.23$, $P^p(5) = 0.05$,
 $P^p(6) = 0.01$),

$P^c(\text{state})$ = attenuation factor ($P^c(1) = 0.50$, $P^c(2) = 0.25$, $P^c(3) = 0.25$, $P^c(4) = 0.25$, $P^c(5) = 0.15$,
 $P^c(6) = 0.01$),

state = state number {0..6},

VAD_HIST is number of consecutive VAD=0 decisions.

The higher the state value is, the more the gains are attenuated. Also the memory of the predictive fixed codebook gain is updated by using the average value of the past four values in the memory:

$$\text{ener}(0) = \frac{1}{4} \left[\sum_{i=1}^4 \text{ener}(n-i) \right] - 3 \quad (7)$$

6.2.3.3 ISF concealment

The past ISFs are shifted towards their partly adaptive mean:

$$\text{ISF}_q(i) = \alpha * \text{past_ISF}_q(i) + (1 - \alpha) * \text{ISF}_{\text{mean}}(i) \quad i = 0..16 \quad (8)$$

where

$\alpha = 0.9$,

$\text{ISF}_q(i)$ is ISF-vector for a current frame,

$\text{past_ISF}_q(i)$ is ISF-vector from the previous frame,

$\text{ISF}_{\text{mean}}(i)$ vector is combination of adaptive mean and constant mean ISF-vectors in the following manner:

$$\text{ISF}_{\text{mean}}(i) = \beta * \text{ISF}_{\text{const_mean}}(i) + (1 - \beta) * \text{ISF}_{\text{adaptive_mean}}(i), \quad i = 0..16 \quad (9)$$

where

$$\beta = 0.75,$$

$$ISF_{adaptive_mean}(i) = \frac{1}{3} \sum_{j=0}^2 past_ISF_q(i) \text{ and is updated whenever BFI}=0.$$

$ISF_{const_mean}(i)$ is a vector containing long time average of ISF-vectors.

6.2.3.4 LTP-lag concealment

The histories of five last good LTP-lags and LTP-gains are used for finding the best method to update.

6.2.3.4.1 LTP-lag concealment when RX_FRAME_TYPE = SPEECH_BAD

The usability of the received LTP lag (Q_{lag}) is defined as follows: (Predicts if the received lag is most probably very close to one that was sent and therefore its usage should not introduce any bad artifacts)

$$Q_{lag} = \begin{cases} 1 & , T_{dif} < 10 \text{ and } T_{min} - 5 < T_{received} < T_{min} + 5 \\ 1 & , g^p(n-1) > 0.5 \text{ and } g^p(n-2) > 0.5 \text{ and } T(n-1) - 10 < T_{received} < T(n-1) + 10 \\ 1 & , g_{min}^p < 0.4 \text{ and } g^p(n-1) = g_{min}^p \text{ and } T_{min} < T_{received} < T_{max} \\ 1 & , T_{dif} < 70 \text{ and } T_{min} < T_{received} < T_{max} \\ 1 & , T_{mean} < T_{received} < T_{max} \\ 0 & , otherwise \end{cases} \quad (10)$$

where:

$T(n-1)$ is LTP lag from the previous good frame,

$$T_{dif} = |T_{received} - T(n-1)|,$$

$$T_{min} = \min(T_{buffer}),$$

$$T_{max} = \max(T_{buffer}),$$

$T_{received}$ is received lag,

$$g_{min}^p = \min(g_{buffer}^p),$$

g^p is LTP gain of the current frame,

$g^p(-1)$ is LTP gain of the previous good frame,

$g^p(-2)$ is LTP gain of the frame before previous good frame,

$$T_{mean} = average(T_{buffer})$$

LPT lag value for the current frame is defined as follows:

$$T = \begin{cases} T_{received} & , Q_{lag} = 1 \\ \frac{1}{3} \sum (T_{max} + T_{max-1} + T_{max-2}) + RND(T_{max} - T_{max-2}) & , Q_{lag} = 0 \end{cases} \quad (11)$$

where:

$$T_{max} = \max(T_{buffer}),$$

T_{max-1} is second largest value in T_{buffer} ,

$T_{\max-2}$ is second largest value in T_{buffer} ,

$RND(x)$ is random value generated to range $\left[-\frac{x}{2}, +\frac{x}{2}\right]$

6.2.3.4.2 LTP-lag concealment when RX_FRAME_TYPE = SPEECH_LOST

The usability of the LTP lag from last good frame ($Q_{\text{lag}_{t-1}}$) is defined as follows: (Predicts if the received lag is most probably very close to one that was sent and therefore its usage should not introduce any bad artifacts)

$$Q_{\text{lag}_{t-1}} = \begin{cases} 1 & , g_{\min}^p > 0.5 \text{ and } T_{\text{dif}} < 10 \\ 1 & , g^p(n-1) > 0.5 \text{ and } g^p(n-2) > 0.5 \\ 0 & , \text{otherwise} \end{cases} \quad (12)$$

where:

$$g_{\min}^p = \min(g_{\text{buffer}}^p),$$

$g^p(n-1)$ is LTP gain of the previous good frame,

$g^p(n-2)$ is LTP gain of the frame before previous good frame

LPT lag value for the current frame is defined as follows:

$$T = \begin{cases} T(n-1) & , Q_{\text{lag}_{t-1}} = 1 \\ \frac{1}{3} \sum (T_{\max} + T_{\max-1} + T_{\max-2}) + RND(T_{\max} - T_{\max-2}) & , Q_{\text{lag}_{t-1}} = 0 \end{cases} \quad (13)$$

where:

$T(n-1)$ is LTP lag from the previous good frame,

$$T_{\max} = \max(T_{\text{buffer}}),$$

$T_{\max-1}$ is second largest value in T_{buffer} ,

$T_{\max-2}$ is second largest value in T_{buffer} ,

$RND(x)$ is random value generated to range $\left[-\frac{x}{2}, +\frac{x}{2}\right]$

6.2.4 Innovation sequence

When RX_FRAME_TYPE = SPEECH_BAD, the received fixed codebook innovation pulses from the erroneous frame are used as they are received.

When RX_FRAME_TYPE = SPEECH_LOST, the received fixed codebook innovation pulses from the erroneous frame are not used and the fixed codebook innovation vector is filled with random signal (values limited to range [-1, +1]).

6.2.5 High-band gain (for 23.85 kbit/s mode)

When RX_FRAME_TYPE = SPEECH_BAD or RX_FRAME_TYPE = SPEECH_LOST the received high-band energy parameter of the frame is not used and the estimation for the high-band gain is used instead. This means that in case of bad/lost speech frames, the high-band reconstruction operates in the same way for all the modes.

6.3 Substitution and muting of lost SID frames

In the speech decoder a single frame classified as SID_BAD shall be substituted by the last valid SID frame information and the procedure for valid SID frames be applied. If the time between SID information updates (updates are specified by SID_UPDATE arrivals and occasionally by SID_FIRST arrivals) is greater than one second this shall lead to attenuation.

Annex A (informative): Change history

Change history							
Date	TSG SA#	TSG Doc.	CR	Rev	Subject/Comment	Old	New
03-2001	11	SP-010086			Version 2.0.0 produced for approval		5.0.0
03-2002	15	SP-020083	001		Error concealment of high band gain in 23.85 kbit/s mode	5.0.0	5.1.0
12-2004	26				Version for Release 6	5.1.0	6.0.0
06-2007	36				Version for Release 7	6.0.0	7.0.0
12-2008	42				Version for Release 8	7.0.0	8.0.0
12-2009	46				Version for Release 9	8.0.0	9.0.0
03-2011	51				Version for Release 10	9.0.0	10.0.0
09-2012	57				Version for Release 11	10.0.0	11.0.0
09-2014	65				Version for Release 12	11.0.0	12.0.0
12-2015	70				Version for Release 13	12.0.0	13.0.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2017-03	75					Version for Release 14	14.0.0
2018-06	80					Version for Release 15	15.0.0
2020-07	-	-	-	-	-	Update to Rel-16 version (MCC)	16.0.0
2022-04	-	-	-	-	-	Update to Rel-17 version (MCC)	17.0.0
2024-03	-	-	-	-	-	Update to Rel-18 version (MCC)	18.0.0
2025-10	-	-	-	-	-	Update to Rel-19 version (MCC)	19.0.0

History

Document history		
V19.0.0	October 2025	Publication