

ETSI TS 127 002 V17.0.0 (2022-04)



**Digital cellular telecommunications system (Phase 2+) (GSM);
Universal Mobile Telecommunications System (UMTS);
Terminal Adaptation Functions (TAF) for services using
asynchronous bearer capabilities
(3GPP TS 27.002 version 17.0.0 Release 17)**



Reference

RTS/TSGC-0327002vh00

Keywords

GSM,UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our
Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2022.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	5
1 Scope	6
1.1 References	6
1.2 Abbreviations	8
1.3 Definitions.....	8
2 Reference Configuration	8
2.1 Customer Access Configuration.....	8
2.2 Terminal Adaptation Function (TAF)	8
3 Terminal Adaptation Functions for transparent services.....	9
3.1 Rate Adaptation in A/Gb mode	9
3.1.1 Rate Adaptation - R interface	9
3.1.2 Rate Adaptation - S Interface (ITU-T I.420 [14]).....	9
3.2 Interchange Circuit Signalling Mapping - ITU-T V-series interface.....	9
3.2.1 Mapping of V.24 [19] circuits to status bits.....	9
3.2.2 Single slot configurations (TCH/F9.6 or TCH/F4.8).....	10
3.2.3 Multislot configurations (TCH/F9.6 or TCH/F4.8)	10
3.2.4 Channel codings TCH/F14.4, TCH/F28.8	10
3.3 Interface Signal Levels - R interface	10
3.4 Call Establishment and Clearing Signalling Mapping.....	11
3.4.1 V-series interface Autocalling/answering	11
3.4.2 S Interface (I.420) Signalling Mapping	11
3.4.3 Call Establishment Manual Operation - Utilizing the Unrestricted Digital Capability.....	11
3.4.4 V-series interface Call Clearing.....	11
4 Terminal Adaptation Functions for non-transparent services	11
4.1 Data Structure.....	11
4.1.1 Data Structure on S Interface.....	11
4.1.2 Data Structure on R Interface	12
4.1.3 Data Structure Provided by the L2R Function to the RLP Function.....	12
4.2 Signalling Mapping	12
4.2.1 Interchange Circuit Signalling Mapping - ITU-T V-series interface	12
4.2.2 Call Establishment and Clearing Signalling Mapping	13
4.3 Flow Control	13
4.3.1 Conditions Requiring Flow Control towards the Network	13
4.3.2 Conditions Requiring Flow Control towards TE2	13
4.3.3 Local Flow Control.....	13
4.3.4 Character Orientated Protocol with No Flow Control	14
4.4 Buffers.....	14
4.4.1 TX Buffers	14
4.4.2 RX Buffers.....	14
4.5 Bit Transparency	14
4.6 Transportation of "BREAK" condition	14
4.7 Data Compression	14
5 Terminal interfacing to 3GPP TS 24.008 [8] Mapping.....	15
5.1 Mobile Originated Calls	16
5.2 Mobile Terminated Calls.....	16
5.3 Call Clearing	17
5.3.1 Mobile initiated.....	17
5.3.2 Network initiated	17
Annex A (normative): L2R Functionality	18

A.1	Introduction	18
A.2	The L2RCOP	18
A.3	Use of the L2RCOP	21
A.3.1	Radio Link Connection Control	21
A.3.2	Data Transfer	21
A.3.3	Status Transfer	21
A.3.4	Flow Control	21
A.3.5	Break	21
A.3.5.1	Normal Realization	21
A.3.5.2	Realization in case of Data Compression is used	22
Annex B (informative):	Use of a 9 pin connector as an MT2 type interface	23
Annex C (informative):	General mapping of ITU-T V.24 [19] circuits to channel status bits	24
Annex D (informative):	Change history	25
History		26

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document defines the interfaces and Terminal Adaptation Functions (TAF) integral to a Mobile Termination (MT) which enable the use of asynchronous bearer services in the PLMN and the attachment of asynchronous terminals to a MT (see 3GPP TS 24.002 [3] and 3GPP TS 23.101 [6]).

The general aspects of Terminal Adaptation Functions are contained in 3GPP TS 27.001 [10].

The present document covers support of these services for the following interfaces and procedures:

- (i) ITU-T V.14 [16] procedures.
- (ii) ITU-T V.21 [17] DTE/DCE interface.
- (iii) ITU-T V.22bis [18] DTE/DCE interface.
- (iv) ITU-T V.32 [24] DTE/DCE procedures.
- (v) ITU-T I.420 [14] S interface.
- (vi) ITU-T V.250 [22] signalling procedures.

The asynchronous data rates between the MT and the IWF are defined in 3GPP TS 22.002 [5].

NOTE: From GSM R99 onwards the following services are no longer required in a PLMN:

- the dual Bearer Services "alternate speech/data" and "speech followed by data";
- the dedicated services for PAD and Packet access;
- the BS 21 ... 26 and BS 31 ... 34.

The support of these services is still optional. The specification of these services is not within the scope of the present document. For that, the reader is referred to GSM Release 98.

NOTE: Please note that the Gb interface does not play any role in the scope of the present document although the term "A/Gb mode" is used. GERAN Iu mode is for further study.

1.1 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

- [1] Void.
- [2] 3GPP TS 43.010: "GSM Public Land Mobile Network (PLMN) connection types".
- [3] 3GPP TS 24.002: "GSM-UMTS Public Land Mobile Network (PLMN) access reference configuration".
- [4] 3GPP TS 44.021: "Rate adaption on the Mobile Station - Base Station System (MS - BSS) interface".
- [5] 3GPP TS 22.002: "Circuit Bearer Services (BS) supported by a Public Land Mobile Network (PLMN)".
- [6] 3GPP TS 23.101: "General UMTS Architecture".
- [7] 3GPP TR 23.910: "Circuit Switched Data Bearer Services".
- [8] 3GPP TS 24.008: "Mobile Radio Interface Layer 3 specification; Core Network Protocols-Stage 3".

- [9] 3GPP TS 24.022: "Radio Link Protocol (RLP) for Circuit Switched Bearer and Teleservices".
- [10] 3GPP TS 27.001: "General on Terminal Adaptation Functions (TAF) for Mobile Stations (MS)".
- [11] 3GPP TS 27.007: "AT command set for 3G User Equipment (UE)".
- [12] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [13] 3GPP TS 29.007: "General requirements on Interworking between the Public Land Mobile Network (PLMN) and the Integrated Services Digital Network (ISDN) or Public Switched Telephone Network (PSTN)".
- [14] ITU-T Recommendation I.420 (1998): "Basic user-network interface".
- [15] ITU-T Recommendation V.4 (1988): "General structure of signals of international alphabet No.5 code for character oriented data transmission over public telephone networks".
- [16] ITU-T Recommendation V.14 (1993): "Transmission of start-stop characters over synchronous bearer channels".
- [17] ITU-T Recommendation V.21 (1988): "300 bits per second duplex modem standardized for use in the general switched telephone network".
- [18] ITU-T Recommendation V.22bis (1988): "2400 bits per second duplex modem using the frequency division technique standardized for use on the general switched telephone network and on point-to-point 2-wire leased telephone-type circuits".
- [19] ITU-T Recommendation V.24 (1996): "List of definitions for interchange circuits between data terminal equipment (DTE) and data circuit-terminating equipment (DCE)".
- [20] ITU-T Recommendation V.25 (1996): "Automatic answering equipment and general procedures for automatic calling equipment on the general switched telephone network including procedures for disabling of echo control devices for both manually and automatically established calls".
- [21] Void.
- [22] ITU-T Recommendation V.250 (1999): "Serial asynchronous automatic dialling and control".
- [23] ITU-T Recommendation V.28 (1993): "Electrical characteristics for unbalanced double-current interchange circuits".
- [24] ITU-T Recommendation V.32 (1993): "A family of 2-wire, duplex modems operating at data signalling rates of up to 9600 bit/s for use in the general switched telephone network and on leased telephone-type circuits".
- [25] ITU-T Recommendation V.42 (1996): "Error-correcting procedures for DCEs using asynchronous-to-synchronous conversion".
- [26] ITU-T Recommendation V.42 bis (1990): "Data compression procedures for data circuit-terminating equipment (DCE) using error correction procedures".
- [27] ITU-T Recommendation V.110 (1996): "Support of data terminal equipments with V-Series interfaces by an integrated services digital network".
- [28] ITU-T Recommendation X.28 (1997): "DTE/DCE interface for a start-stop mode Data Terminal Equipment accessing the Packet Assembly/Disassembly facility (PAD) in a public data network situated in the same country".
- [29] Personal Computer Memory Card Association: "PCMCIA 2.1 or PC-Card 3.0 electrical specification or later revisions".

- [30] Infrared Data Association IrDA "IrPHY Physical layer signalling standard".
- [31] ISO 2110 (1989): "Data communication - 25-pole DTE/DCE interface connector and contact number assignments".
- [32] ITU-T Recommendation Q.931 (1998): "ISDN user-network interface layer 3 specification for basic call control".

1.2 Abbreviations

In addition to the abbreviations used in the present document that are listed in TR 21.905 [12] the following internal abbreviations are used:

CFI	Call Failure Indication
CRN	Call Request with Number
DIC	Disregard Incoming Call
IA5	International Alphabet no. 5
INC	INcoming Call
INV	INValid
ITU-T	ITU-Telecommunication Standardization Sector
VAL	VALid

1.3 Definitions

The term 'mobile station' (MS) in the present document is synonymous with the term 'user equipment' (UE) as defined in 3GPP TR 21.905 [12].

The term 'TE2' in the present document is synonymous with the term 'TE' as defined in 3GPP TR 21.905 [12].

The term 'MT2' in the present document is synonymous with the term 'MT' as defined in 3GPP TR 21.905 [12].

In addition to the definitions used in the present document that are listed in TR 21.905 [12] the following internal definitions are used:

A/Gb mode: indicates that the text applies only to a system or sub-system which operate in A/Gb mode of operation, i.e. with a functional division that is in accordance with the use of an A or a Gb interface between the radio access network and the core network

Iu mode: indicates that the text applies only to a system or a sub-system which operates in Iu mode of operation, i.e. with a functional division that is in accordance with the use of an Iu-CS or Iu-PS interface between the radio access network and the core network

2 Reference Configuration

3GPP TS 27.001 [10], 3GPP TS 23.101 [6] and 3GPP TS 24.002 [3] describe the basic reference configurations.

2.1 Customer Access Configuration

This configuration is as shown in figure 1 of 3GPP TS 24.002 [3]. The present document specifically refers to the Mobile Terminations (MTs) which support terminals of the type TE1 and TE2 with asynchronous capabilities. The TAF is functionally a part of an MT1, MT2 or MT0 with an integral asynchronous data capability.

2.2 Terminal Adaptation Function (TAF)

The TAF provides facilities to allow manual or automatic call control functions associated with circuit switched services. The following functions are also included:

- Conversion of electrical, mechanical, functional and procedural characteristics of the ITU-T V series and ISDN type interfaces to those required by the PLMN.

- Bit rate adaptation of the ITU-T V series data signalling rates and the ISDN 64 kbit/s to that provided in the PLMN.
- The mapping functions necessary to convert automatic calling and/or automatic answering procedures of the ITU-T recommendation V.250 [22] and parameters for asynchronous operation.
- The mapping functions necessary to convert S interface signalling to the PLMN Dm channel signalling.
- Flow control (in some cases resulting in non-transparency of data as described in 4.3).
- Layer 2 Relaying (see annex A).
- In-call modification function.
- Synchronization procedure, which means the task of synchronizing the entry to and the exit from the data transfer phase between two user terminals. This is described in 3GPP TS 27.001 [10].
- Filtering of channel control information as described in 3GPP TS 27.001 [10].
- Terminal compatibility checking.
- Splitting and combining of the data flow in case of multiple substream data configurations.

3 Terminal Adaptation Functions for transparent services

3GPP TS 43.010 [2] defines connection types for the support of transparent services in A/Gb mode whilst 3GPP TR 23.910 [7] defines connection types for transparent services in UTRAN Iu mode.

3.1 Rate Adaptation in A/Gb mode

3GPP TS 44.021 [4] describes the rate adaptation scheme to be utilized over the Base Station (BS) to Mobile Station (MS) link. 3GPP TS 43.010 [2] refers to the rate adaptation elements to be provided in the MS.

3.1.1 Rate Adaptation - R interface

This is provided as indicated in 3GPP TS 44.021 [4].

3.1.2 Rate Adaptation - S Interface (ITU-T I.420 [14])

VOID

3.2 Interchange Circuit Signalling Mapping - ITU-T V-series interface

The interchange circuit signalling at the interface between the TE2 and the MT shall conform to ITU-T Recommendation V.24 [19]. The signals required at this interface are shown in table 3.

The mapping of these signals to the pins of a 25 pin D-type connector is given in ISO 2110 [31]. The mapping for a commonly used 9 pin connector is given in annex B.

3.2.1 Mapping of V.24 [19] circuits to status bits

Status bits SA, SB and X are used to convey channel control information associated with the data bits in the data transfer state. Table 1 shows the mapping scheme between the ITU-T V.24 [19] circuit numbers and the status bits for the transparent mode. It also shows how the unused status bits should be handled. It is derived from the general mapping scheme described in annex C. A binary 0 corresponds to the ON condition, a binary 1 to the OFF condition.

The transport of these status bits by the various channel codings is described in subsequent sections.

Table 1: Mapping scheme at the MT for the transparent mode

Signal at TE2/MT interface or condition within the MT	Mapping direction: MT to IWF	Mapping direction: IWF to MT
CT 105	not mapped (note 1)	
CT 106		from status bit X (note 7)
CT 107		not mapped (note 5)
CT 108/2	not mapped (note 6)	
CT 109		from status bit SB (note 7)
CT 133	not mapped (note 2)	
always ON	to status bit SA (note 3)	
always ON	to status bit SB (note 1)	
always ON	to status bit X (note 4)	
ignored by MT		from status bit SA (note 3)
<p>NOTE 1: The SB bit towards the IWF, according to the General Mapping (annex C), could be used to carry CT 105. However, CT 105 should always be ON in the data transfer state since only duplex operation is supported. Also, many DTEs use the connector pin assigned to CT 105 for CT 133. No interchange circuit shall be mapped to the SB bit, which shall always be set to ON in the data transfer state.</p> <p>NOTE 2: CT 133 is not mapped since there is no flow control in transparent mode.</p> <p>NOTE 3: The SA bits in both directions are available only with certain channel codings. Therefore, for maximum compatibility, they should not be mapped.</p> <p>NOTE 4: The X bit towards the IWF is not mapped and shall always be set to ON in the data transfer state since there is no flow control in transparent mode.</p> <p>NOTE 5: CT 107 is controlled by the channel synchronisation process (07.01).</p> <p>NOTE 6: CT 108/2 may be used in the call setup and answering processes.</p> <p>NOTE 7: The status bits are filtered before being mapped to the ITU-T V.24 [19] circuits (3GPP TS 27.001 [10]).</p>		

3.2.2 Single slot configurations (TCH/F9.6 or TCH/F4.8)

3GPP TS 44.021 [4] refers to the frame structure and identifies the use of the status bits for the carriage of signalling information in transparent mode. The S bits are put into two groups. SA is carried by bits S1, S3, S6, S8 and SB by bits S4, S9 in the ITU-T Recommendation V.110 [27] 80-bit intermediate rate frame.

3.2.3 Multislot configurations (TCH/F9.6 or TCH/F4.8)

In transparent multislot configurations, status bits S1, S3 and the X-bit between the D12 and D13 - in the ITU-T Recommendation V.110 [27] 80-bit intermediate rate frame - are used for transferring substream numbering information. The S4-bit is used for frame synchronization between the parallel substreams (reference 3GPP TS 44.021 [4]). The remaining S bits are put into two groups. SA is carried by bits S6, S8 and SB by bit S9. The remaining X bits can be used as described in clause 3.2.1.

3.2.4 Channel codings TCH/F14.4, TCH/F28.8

For information on the mapping of the interchange circuit signalling bits in the 14,5 kbit/s multiframe structure, refer to 3GPP TS 44.021 [4]. There is no SA bit in this channel coding. Only the SB and X bits are carried.

3.3 Interface Signal Levels - R interface

The signal levels at the interface between the TE2 and the MT shall conform to ITU-T V.28 [23], or to IrDA IrPHY physical signalling standard specification [30], or to PCMCIA 2.1 [29], or to PC-Card 3.0 [29] electrical specification or to later revisions.

3.4 Call Establishment and Clearing Signalling Mapping

3.4.1 V-series interface Autocalling/answering

- These procedures are provided according to ITU-T Recommendation V.250 [22] and 3GPP TS 27.007 [11].
- For autocalling, during the call establishment phase, i.e. after signalling, calling tone according to ITU-T Recommendation V.25 [20] shall be generated in the IWF (3GPP TS 29.007 [13]).

During the call establishment phase:

- the states of the ITU-T Recommendation V.24 [19] interchange circuits shall be according to 3GPP TS 27.001 [10];
- the data and status bits from the IWF shall not be mapped;
- the data and status bits towards the IWF shall be according to 3GPP TS 27.001 [10].

3.4.2 S Interface (I.420) Signalling Mapping

Void.

3.4.3 Call Establishment Manual Operation - Utilizing the Unrestricted Digital Capability

In this case the user shall not hear network supervisory tones or answer tone. The data transfer phase shall be entered automatically.

3.4.4 V-series interface Call Clearing

This procedure is provided according to ITU-T Recommendation V.250 [22] and 3GPP TS 27.007 [11].

During the call clearing phase:

- the states of the ITU-T Recommendation V.24 [19] interchange circuits shall be according to ITU-T Recommendation V.24 [19];
- the data and status bits from the IWF shall not be mapped or used by the MT in any way;
- the data and status bits towards the IWF have no significance and may be set to 1 and OFF respectively.

4 Terminal Adaptation Functions for non-transparent services

3GPP TS 43.010 [2] defines connection types for the support of non-transparent services in A/Gb mode whilst 3GPP TR 23.910 [7] defines connection types for non-transparent services in UTRAN Iu mode.

4.1 Data Structure

4.1.1 Data Structure on S Interface

Void.

4.1.2 Data Structure on R Interface

The protocol models for this are described in 3GPP TS 43.010 [2]. The data consists of 7 or 8 bit characters with additional start and stop elements. The 7 bit data can additionally have an associated parity bit, 8 bit data cannot have an additional parity bit.

The interchange circuit signalling at the interface between the TE2 and the MT shall conform to ITU-T Recommendation V.24 [19]. The signals required at this interface are shown in table 3.

The interface shall provide inband (XON/XOFF) and out of band (CT106) flow control. The use of CT133 for out of band flow control shall be implemented according to ITU-T Recommendation V.42 [25].

4.1.3 Data Structure Provided by the L2R Function to the RLP Function

See annex A.

4.2 Signalling Mapping

4.2.1 Interchange Circuit Signalling Mapping - ITU-T V-series interface

Status bits SA, SB and X are used to convey channel control information associated with the data bits in the data transfer state. Table 2 shows the mapping scheme between the ITU-T Recommendation V.24 [19] circuit numbers and the status bits for the non-transparent mode. It also shows how the unused status bits should be handled. It is derived from the general mapping scheme described in annex C. A binary 0 corresponds to the ON condition, a binary 1 to the OFF condition.

The transport of the status bits by the L2RCOP is described in annex A.

Table 2: Mapping scheme at the MT for the non-transparent mode

Signal at TE2/MT interface or condition within the MT	Mapping direction: MT to IWF	Mapping direction: IWF to MT
CT 105	not mapped (note 1)	
CT 106 (note 4)		from status bit X (note 7)
CT 107		not mapped (note 5)
CT 108/2	not mapped (note 6)	
CT 109		from status bit SB
CT 133 (note 8)	to status bit X (notes 3,8)	
always ON	to status bit SA (note 2)	
always ON	to status bit SB (note 1)	
ignored by MT		from status bit SA (note 2)
NOTE 1: The SB bit towards the IWF, according to the General Mapping (annex C), could be used to carry CT 105. However, CT 105 should always be ON in the data transfer state since only duplex operation is supported. Also, many DTEs use the connector pin assigned to CT 105 for CT 133. No interchange circuit shall be mapped to the SB bit which shall always be set to ON in the data transfer state.		
NOTE 2: The SA bits (both directions) are not mapped since CTs 107 and 108/2 are handled locally (notes 5 and 6).		
NOTE 3: The condition of status bit X towards the IWF may also be affected by the state of the receive buffer in the MT.		
NOTE 4: The state of CT 106 (or other local flow control mechanism) may also be affected by the state of the transmit buffer in the MT and the state of the RLP (RR/RNR).		
NOTE 5: CT 107 is controlled by the channel synchronisation process (3GPP TS 27.001 [10]).		
NOTE 6: CT 108/2 may be used in the call setup and answering processes.		
NOTE 7: For inband local flow control, changes in the condition of the status bit X from the IWF also result in the sending of XON or XOFF to the DTE.		
NOTE 8: For inband local flow control, CT 133 is not mapped and the status bit X towards the IWF is controlled by the reception of XON and XOFF characters from the DTE.		

4.2.2 Call Establishment and Clearing Signalling Mapping

This is identical to the transparent case with the exception of the transparent/non-transparent element, see clause 5.

In addition, the L2R/RLP shall give an explicit indication when the link into the connected network is established. If the link fails, an explicit "link lost" indication shall be given.

4.3 Flow Control

The passage of flow control information between L2Rs is described in annex A. clauses 4.3.1, 4.3.2 and 4.3.3 describe the operation of the flow control mechanisms. These mechanisms apply for all the non-transparent services covered by the present document, with the exception of Character Orientated Protocol with No Flow Control which is treated in clause 4.3.4.

4.3.1 Conditions Requiring Flow Control towards the Network

The L2R function shall send immediately a "flow control active" indication in the following circumstances:

- (i) If the receive buffer from the radio side reaches a preset threshold (BACKPRESSURE).
- (ii) If local flow control is initiated by the TE2 (see 4.3.3 a) or c)). On receipt of this flow control indication transmission of data from the receive buffer towards the TE2 is halted.

On removal of the buffer congestion or local flow control the L2R shall send a "flow control inactive" indication.

In addition, for the local flow control condition, transmission of data from the receive buffers shall be restarted.

4.3.2 Conditions Requiring Flow Control towards TE2

The L2R functions shall immediately activate local flow control (see 4.3.3 b) or d)) under the following circumstances:

- (i) The transmit buffer reaches a pre-set threshold (BACKPRESSURE).
- (ii) The L2R receives a "flow control active" indication.

On removal of buffer congestion or receipt of L2R/RLP "flow control inactive" the local flow control shall be removed.

4.3.3 Local Flow Control

Two methods of local flow control are allowed:

Outband:

- a) From TE2: CT133 shall be turned OFF to indicate flow control active, and ON to indicate flow control inactive.
- b) From TAF: CT106 shall be turned OFF to indicate flow control active, and ON to indicate flow control inactive.

Inband:

- c) From TE2: XOFF (DC3) is sent to indicate flow control active. XON (DC1) is sent to indicate flow control inactive. The XON/XOFF characters received from the TE2 are extracted by the L2R from the data stream and are not sent across the radio interface. Where XON/XOFF is utilized then the TAF shall generate flow control active/inactive immediately, i.e. the XON/XOFF characters do not enter the transmit buffer.
- d) From TAF: As from TE2.

If the outband method is used, the L2R shall pass the DC1/DC3 characters as data, i.e. no flow control indications shall be generated on receipt of DC1/DC3.

4.3.4 Character Orientated Protocol with No Flow Control

If the users layer 2 indicates Character Orientated Protocol with no flow control then no flow control is used, i.e. the X-bit is not set to OFF and DC1/DC3 characters are passed through as data.

4.4 Buffers

4.4.1 TX Buffers

Data received on CT103 from the TE2 shall be buffered such that if the MT is unable to transfer the data over the radio path then data is not lost.

The buffer shall be capable of holding the data. Its size is up to the implementers.

When the buffer is half full, TE2 shall be flow controlled as per 4.3.2, unless Character Orientated Protocol with No Flow Control is being used (see 4.3.4).

4.4.2 RX Buffers

Data for transfer to the TE2 on CT104 shall be buffered such that if the TE2 is unable to accept data then data transferred from the MT is not lost.

The buffer size should be up to the implementers.

When the buffer becomes half full, the L2R shall send a "flow control active" indication, unless Character Orientated Protocol with No Flow Control is being used.

4.5 Bit Transparency

Void.

4.6 Transportation of "BREAK" condition

The "BREAK" condition must be recognized by the L2R function and passed immediately to the IWF. The L2R shall generate a "BREAK" condition to the TE2 on receipt of a "BREAK" indication from the IWF.

Annex A describes how the L2R shall transport the "BREAK" indication.

4.7 Data Compression

L2R optionally includes a data compression function according to ITU-T V.42bis [26] that spans from the MS to the IWF in the MSC. The error correction function is provided by RLP instead of ITU-T Recommendation V.42 [25]. RLP XID is used to negotiate compression parameters. L2R includes the ITU-T V.42bis [26] control function especially for reinitializing in case of break recognition or RLP reset and error indication by the data compression function respectively.

Table 3: Minimum set of Interchange Circuits

Circuit Number	Circuit Name	Ground	Data		Control	
			To TE2	From TE2	To TE2	From TE2
CT102	Common return	x				
CT103	Transmitted data			x		
CT104	Received data return		x			
CT105	Request to send (note 2)					x
CT106	Ready for sending				x	
CT107	Data set ready				x	
CT108/2	Data terminal ready					x
CT109	Data channel received line signal detector				x	
CT125	Calling indicator (note 1)				x	
CT133	Ready for Receiving (note 2)					x

NOTE 1: CT125 is used with the automatic answering function of the TAF.

NOTE 2: CT105 and CT133 are assigned to the same connector pin on both the standard 25 pin connector (ISO 2110) and the commonly used 9 pin connector (annex B). When this pin is used for CT133 then on the DCE (MT) side of the interface CT 105 is treated as being always in the ON condition. Similarly, when this pin is being used for CT105 then on the DCE (MT) side of the interface CT 133 is treated as being always in the ON condition. As circuit 133 is used only in duplex operation and circuit 105 is used only in half duplex operation (which is not supported by GSM or UMTS) there should be no conflict.

5 Terminal interfacing to 3GPP TS 24.008 [8] Mapping

Only those elements/messages that are of particular relevance are considered.

Interface procedures not directly mappable to 3GPP TS 24.008 [8] are not considered. Mobile management procedures of 3GPP TS 24.008 [8] are not considered applicable.

Mapping of other call establishment or clearing messages to the S interface e.g. "Call proceeding" etc. has not been included. It is assumed these can be mapped directly and as such are of no relevance to the manual interfaces.

For the Alternate speech/group 3 facsimile service the TAF shall be able to generate a "Modify" message according to the defined procedure in 3GPP TS 24.008 [8].

5.1 Mobile Originated Calls

Call establishment is initiated by the keypad or DTE action:

a) Setup

Element	Derived from
	MMI
Called Address	Keypad
Called Sub Address	Keypad
HLC	Derived from internal settings or MMI information.
LLC	Same as HLC
BC	Same as HLC 3GPP TS 27.001 [10] gives allowed values

b) Release Complete

Element	Derived from
	MMI
Cause	Display (optional)

5.2 Mobile Terminated Calls

Call establishment is initiated by receipt of Setup at the MS:

a) Setup

Element	Mapped on to
	MMI
Called Address	Display (optional)
Called Sub Address	Display (optional)
HLC	Display (optional)
LLC	Display (optional)
BC	Display (optional)

b) Call Confirm

Information for the BC element in the call confirm shall be derived from e.g. MMI or by internal settings.

c) Connect

Connect is sent in response to connect from MMI.

5.3 Call Clearing

5.3.1 Mobile initiated

Call clearing is initiated by the keypad or DTE action:

Disconnect

Element	Derived from	
	MMI	ITU-T V.250 [22]
Cause	Keypad	See clause 3.4.4

5.3.2 Network initiated

Call clearing is initiated by receipt of Disconnect at the MS:


Disconnect

Element	Mapped on to	
	MMI	ITU-T V.250 [22]
Cause	Display (optional)	Unsolicited result codes

Annex A (normative): L2R Functionality

A.1 Introduction

This annex describes the L2R functionality for non-transparent character oriented protocols. The general aspects of L2Rs are described in 3GPP TS 27.001 [10]. Figure 1 shows the 3 sub-functions of a character oriented L2R.

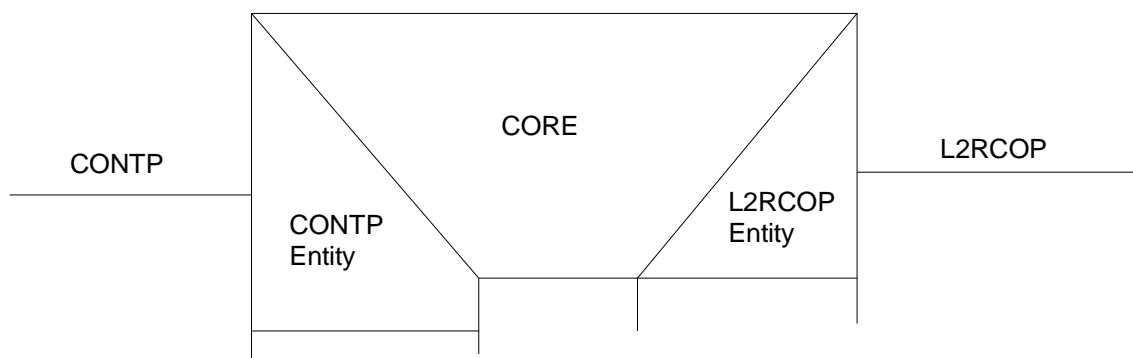

CONTP Character Oriented Non-Transparent Protocol.
 CORE Character Oriented Relay Entity.
 L2RCOP L2R Character Oriented Protocol.

Figure 1

Section 2 describes the L2R Character Oriented Protocol (L2RCOP) and clause 3 the use of the L2RCOP.

A.2 The L2RCOP

Information is transferred between L2Rs in fixed length n octet Protocol Data Units (PDUs). This corresponds to the fixed length of the RLP frame information field. The octets within the L2RCOP-PDU are numbered 0 to $n-1$; octet 0 is transmitted first. The value of n depends on the negotiated RLP version and frame type (3GPP TS 24.022[9]). The bits within the octets are numbered 1 to 8; bit 1 is transmitted first.

The RLP version value 2 indicates RLP multi-link operation. The RLP version value 0 or 1 indicates RLP single-link operation.

- Each octet contains a status octet, an information octet or fill.
 Octet 0 contains either a status octet or a user information octet.
- Octet 0 shall always contain a status octet in case at least one status octet is transported in the L2RCOP PDU. In RLP-versions 0 and 1 a PDU always carries at least one status octet. In RLP version 2 a PDU carries status octet(s) only if actual status change(s) has taken place within the period represented by the PDU. Here the L2R status flag in the RLP version 2 header is set to 1 when status octet(s) is carried in the PDU.
- Status octets contain 3 status bits and 5 address bits. In cases where two status octets within the PDU are separated by more than 23 octets, the first status octet in octet m is followed by a pointer octet in octet $m+1$ forming a two-octet status field. The pointer octet contains one reserved bit and seven address bits indicating the number of characters between the status field and the second status octet.
- The 3 status bits correspond to SA, SB and X in ITU-T Recommendation V.110 [27]. The SA, SB and X bits use bit positions 8, 7 and 6 in the status octets. When a status bit changes the current state of all three bits shall be transmitted.
- Information octets are character octets or encoded character octets.
- Character octets are coded in the following way:

- The first bit of the character received/transmitted corresponds to bit position 1 in the octet and the seventh bit corresponds to bit 7. For order of transmission of IA5 characters see ITU-T Recommendation V.4 [15].
- 7 bit characters are padded with a 0 in bit position 8. Received parity (if used) is inserted in bit position 8, if parity is not used bit 8 is set to 0.
- Any start/stop bits are removed by the L2R.
- Encoded character octets are provided by the compression function. They are encoded according to ITU-T Recommendation V.42bis [26].
- Information octets are inserted into L2RCOP-PDUs in order of transmission in octets 1 to n-1 for RLP single-link operation, in octets 1 to n-1 for RLP multi-link operation with status octet transportation, and in octets 0 to n-1 for multi-link operation with no status octet transportation.
- The address field in the status octets indicates the position of next status octet within the L2RCOP-PDU. This indicates the number of characters between status octets. Thus if two status octets are inserted into L2RCOP-PDU at offsets l and m the address value shall be defined by m-l-1. Address bit 2^0 corresponds to bit 1 in the status octets. Address bit 2^1 to bit 2 etc.
- Status octets are inserted in the character stream whenever a status change needs to be transmitted.
- Only address values 1 to n-2 ($n-2 \leq 23$) in the address field of status octets are used for addressing purposes. The implication of not allowing address value 0 to be used for addressing is that two status octets cannot be sent after each other. The remaining codes are used to indicate:
 - Last status change, remainder of L2RCOP-PDU empty. Address field value 31.
 - Last status change, remainder of L2RCOP-PDU full of characters. Address field value 30.
 - Destructive break signal, remainder of L2RCOP-PDU empty. Address field value 29.
 - Destructive break acknowledge, remainder of L2RCOP-PDU empty. Address field value 28.
 - L2RCOP-PDU contains at least two status octets which are separated by more than 23 characters; the address-field value in the first octet of the two-octet status field is 27 and the address bits in the pointer octet of the status field indicate the number of characters between the two-octet status field and the next status octet.
 - Address field values from n-1 to 26 are reserved. In case of a PDU more than 25 octets in length, address field values from 24 to 26 are reserved.
- When it is necessary to insert a status octet into the character stream when no status change has occurred, e.g. to indicate that the remainder of a L2RCOP-PDU is empty or to indicate a break signal, the current status shall be repeated.
- In case when 64 data octets are carried by a 66-octet PDU, a status octet is carried in octet 0 and another status octet within the first 24 data octets. (The first status octet gives the address of the second status octet, which carries value 30 in its address field).

Three examples of an L2RCOP PDU are shown in figure 2.

	8	7	6	5	4	3	2	1	
0	SA	SB	x	0	0	0	1	1	
1	1	1	0	0	0	1	1	1	IA5 "G" (odd parity)
2	1	1	0	1	0	0	1	1	IA5 "S" (odd parity)
3	1	1	0	0	1	1	0	1	IA5 "M" (odd parity)
4	SA	SB	x	1	1	1	1	1	(last status change, rest of PDU empty)
.									
.									
.									
n-1									

Figure 2a: Single-link RLP and multi-link RLP with status octet transfer in PDU

	8	7	6	5	4	3	2	1	
0	1	1	0	1	0	0	1	1	IA5 "S" (odd parity)
1	1	1	0	0	0	1	1	1	IA5 "G" (odd parity)
2	1	1	0	1	0	0	1	1	IA5 "S" (odd parity)
3	1	1	0	0	1	1	0	1	IA5 "M" (odd parity)
4									
.									
.									
.									
n-1	1	1	0	0	1	1	0	1	IA5 "M" (odd parity)

Figure 2b: Multi-link RLP L2RCOP PDU with no status octet transfer

	8	7	6	5	4	3	2	1	
0	SA	SB	X	0	0	0	1	1	
1	1	1	0	0	1	1	0	1	IA5 "M" (odd parity)
2	1	1	0	0	0	0	0	1	IA5 "A" (odd parity)
3	1	1	0	1	0	0	1	0	IA5 "R" (odd parity)
4	SA	SB	X	1	1	0	1	1	
5	R	0	1	0	0	0	1	1	
.									
.									
41	SA	SB	X	0	0	0	0	1	
42	1	1	0	0	1	1	0	1	IA5 "K" (odd parity)
43	SA	SB	X	1	1	1	1	0	
.									
.									
65	1	1	0	0	1	1	1	1	IA5 "O" (odd parity)

Figure 2c: A 66-octet RLP L2RCOP PDU with status octets separated by more than 23 octets

A.3 Use of the L2RCOP

The CORE relays status changes, break conditions and characters in both directions between the CONTP entity and the L2RCOP entity.

The L2RCOP entity performs the following functions.

A.3.1 Radio Link Connection Control

Given appropriate indications from the signalling mechanisms the L2RCOP entity uses the services of the radio link to establish and release the connection to its peer L2RCOP entity in the IWF.

A.3.2 Data Transfer

The L2RCOP entity shall assemble and disassemble L2RCOP-PDUs. Data characters are assembled into L2RCOP-PDUs until either:

- the PDU is full;
- the Radio Link service can accept another Radio Link service Data Unit.

L2RCOP-PDUs are transferred to the peer L2RCOP entity using the data transfer services of the radio link.

A.3.3 Status Transfer

The L2RCOP entity transfers interface status information between L2Rs using bits SA, SB and X in the status octets in L2RCOP-PDUs. Status changes are inserted in the L2RCOP-PDU in the position corresponding to the position in the character stream that the interface status change occurred. When the RLP is established or reset a L2RCOP-PDU with the current status values shall be sent.

The general mapping between ITU-T V.24 [19] interface circuit numbers and status bits is described in annex C. A binary 0 corresponds to the ON condition, a binary 1 to the OFF condition. The specific mapping at the MT for the non-transparent bearer service is given in clause 4.2.1. The mapping schemes used at the IWF are given in 3GPP TS 29.007 [13].

A.3.4 Flow Control

Flow control information is transferred between L2Rs in 2 ways, these are:

- back pressure caused by L2R buffer conditions.
- use of the X-bit in status octets:
 - flow control active, X-bit = ONE.
 - flow control inactive, X-bit = ZERO.

A.3.5 Break

The transfer of break conditions between L2Rs is via the status octets with appropriate coding of the address field. Where the "Break Signal" is generated it shall conform to the definition shown in ITU-T Recommendation X.28 [28].

A.3.5.1 Normal Realization

The L2RCOP-PDU contains the mandatory status octet coded as the Destructive Break.

Upon the receipt of the "Break Signal", the L2R shall destroy any existing data in front of the Break Signal in the same direction, and all the buffered data in the other direction. The L2R shall then pass the Break Signal immediately on.

The termination of a break condition is indicated by sending an L2RCOP-PDU containing characters.

A.3.5.2 Realization in case of Data Compression is used

If the data compression function is used L2RCOP has to ensure the synchronization of the encoder and decoder according to ITU-T Recommendation V.42bis [26].

Upon receipt of a L2RCOP-PDU containing a status octet that signals a Destructive Break L2R destroys all data in the TX and RX buffer and re-initializes the compression function. Then L2R shall transmit an L2RCOP-PDU that contains the mandatory status octet coded as the Destructive Break Acknowledge. After that L2R shall restart the data transfer.

Upon an receipt of the "Break Signal" by the CONTP, the L2R destroys any existing data in the TX and RX buffer and shall then pass the Break Signal immediately by using L2RCOP-PDU containing a status octet coded as the Destructive Break. L2R shall wait for a L2RCOP-PDU containing a mandatory status octet coded as Destructive Break Acknowledge. Following data received by the CONTP shall be stored in the TX buffer. Data received in L2RCOP-PDUs shall be discarded. After reception of the L2RCOP-PDU containing a mandatory status octet coded as Destructive Break Acknowledge L2R shall re-initialize the data compression function and restart the data transfer.

Annex B (informative): Use of a 9 pin connector as an MT2 type interface

For asynchronous data communications many of the physical pins on a standard 25 pin D-type connector (ISO 2110 [31]) are not used. As a result many communication devices have only a 9 pin connector to allow them to be made smaller. This interface is a MT2 type providing the correct ITU-T Recommendation V.24 [19] signals are supported.

Table B1 gives the pin assignments for a 9 pin connector. Two variants are permitted:

1. Outband flow control

When outband (CT 133) flow control is required, pin number 7 carries CT 133 (Ready for Receiving). In this case CT 105 is not mapped to any physical pin. On the MT2 side of the interface, CT 105 is treated as being always in the ON condition.

2. No outband flow control

When no outband (CT 133) flow control is required, pin number 7 may carry CT 105 (Request to Send). In this case CT 133 is not mapped to any physical pin. On the MT2 side of the interface, CT 133 is treated as being always in the ON condition.

Table B1: Interchange circuit mappings

ITU-T V.24 [19] Circuit Number	Circuit Name	Pin Number
CT 102	Common ground	5
CT 103	TxD	3
CT 104	RxD	2
CT 105	RTS	7 (note)
CT 106	RFS (CTS)	8
CT 107	DSR	6
CT 108/2	DTR	4
CT 109	DCD	1
CT 125	CI	9
CT 133	RFR	7 (note)
NOTE: Only one of these mappings may exist at any one time.		

Annex C (informative): General mapping of ITU-T V.24 [19] circuits to channel status bits

In the data transfer state, status bits SA, SB and X can be used to convey channel control information associated with the data bits. Table C1 shows the general mapping scheme between the ITU-T V.24 [19] circuit numbers and the status bits. A binary 0 corresponds to the ON condition, a binary 1 to the OFF condition. The specific mappings for the various PLMN bearer types are given elsewhere in the present document.

Table C1: General mapping scheme at the MT

Signal at TE2/MT interface	Status bit direction: MT to IWF	Status bit direction: IWF to MT
CT 105 (note 3)	SB	
CT 106 (note 1)		X
CT 107		SA
CT 108/2	SA	
CT 109		SB
CT 133 (note 3)	X (note 2)	
<p>NOTE 1: The condition of CT 106 may also be affected by the state of any transmit buffer in the MT.</p> <p>NOTE 2: The condition of Status bit X towards the IWF may also be affected by the state of any receive buffer in the MT.</p> <p>NOTE 3: CT105 and CT133 are assigned to the same connector pin on both the standard 25 pin connector (ISO 2110) and the commonly used 9 pin connector (annex B). When this pin is used for CT133 then on the MT side of the interface CT 105 is treated as being always in the ON condition. SB towards the IWF shall therefore also always be ON. Similarly, when this pin is being used for CT105 then on the MT side of the interface CT 133 is treated as being always in the ON condition. X towards the IWF shall therefore also always be ON. As circuit 133 is used only in duplex operation and circuit 105 is used only in half duplex operation (which is not supported by GSM or UMTS) there should be no conflict.</p>		

Annex D (informative): Change history

Change history							
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New
	Apr 1999				Transferred to 3GPP CN1	7.0.0	
	CN#03				Approved at CN#03		3.0.0
	CN#04		001		Introduction of EDGE channel codings into the specifications [E-mail approval]	3.0.0	3.1.0
	CN#06		002		Service clean-up for Release 99	3.1.0	3.2.0
	CN#07		003		UMTS Clean Up	3.2.0	3.3.0
	CN#08		004		Adaptations for UMTS	3.3.0	3.4.0
	CN#09		007		Modification from V.25bis to V.250	3.4.0	4.0.0
12-2001	CN#14	NP-010604	008	3	Terminology Clarifications requested by TSG GERAN	4.0.0	5.0.0
12-2004	CN#26				Upgraded to v6.0.0	5.0.0	6.0.0
06-2007	CT#36				Upgraded to v7.0.0	6.0.0	7.0.0
12-2008	CT#42				Upgraded to v8.0.0 due to simple upgrade without no technical change	7.0.0	8.0.0
12-2009	CT#46				Automatic upgrade from previous Release	8.0.0	9.0.0
12-2010	CT#50	CP-100779	010	1	Correcting non-specific external references	9.0.0	9.1.0
03-2011	CT#51				Automatic upgrade from previous Release version 9.1.0	9.1.0	10.0.0
03-2011	CT#51				Correction of heading and numbering made by MCC	10.0.0	10.0.1
09-2012	CT#57				Automatic upgrade from previous Release version 10.0.1	10.0.1	11.0.0
10-2014					Automatic upgrade from previous Release	11.0.0	12.0.0
12-2015					Automatic upgrade from previous Release	12.0.0	13.0.0
Change history							
Date	TSG #	TSG Doc.	CR	Rev	Cat	Subject/Comment	New
2017-03	CT#75					Automatic upgrade from previous Release	14.0.0
2018-06	CT#80					Automatic upgrade from previous Release	15.0.0
2020-06	CT#88e					Update to Rel-16 version (MCC)	16.0.0
2022-03	SA#95e	-	-	-		Update to Rel-17 version (MCC)	17.0.0

History

Document history		
V17.0.0	April 2022	Publication