

# ETSI TS 127 003 V19.0.0 (2025-10)



**Digital cellular telecommunications system (Phase 2+) (GSM);  
Universal Mobile Telecommunications System (UMTS);  
Terminal Adaptation Functions (TAF) for services using  
synchronous bearer capabilities  
(3GPP TS 27.003 version 19.0.0 Release 19)**



---

**Reference**RTS/TSGC-0327003vj00

---

---

**Keywords**GSM,UMTS

---

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

---

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

---

**Important notice**

The present document can be downloaded from the  
[ETSI Search & Browse Standards](#) application.

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver repository](#).

Users should be aware that the present document may be revised or have its status changed,  
this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to  
the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our  
[Coordinated Vulnerability Disclosure \(CVD\)](#) program.

---

**Notice of disclaimer & limitation of liability**

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

---

**Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2025.  
All rights reserved.

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the [ETSI IPR online database](#).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found at [3GPP to ETSI numbering cross-referencing](#).

---

# Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

# Contents

|                                                                                                                                |           |
|--------------------------------------------------------------------------------------------------------------------------------|-----------|
| Intellectual Property Rights .....                                                                                             | 2         |
| Legal Notice .....                                                                                                             | 2         |
| Modal verbs terminology.....                                                                                                   | 2         |
| Foreword.....                                                                                                                  | 4         |
| 1 Scope .....                                                                                                                  | 5         |
| 2 References .....                                                                                                             | 5         |
| 2.1 Abbreviations .....                                                                                                        | 7         |
| 2.2 Definitions .....                                                                                                          | 7         |
| 3 General .....                                                                                                                | 7         |
| 3.1 Customer access configuration.....                                                                                         | 7         |
| 3.2 Terminal Adaptation Function .....                                                                                         | 8         |
| 3.3 TAF Interfacing to other MT functions .....                                                                                | 8         |
| 4 Terminal Adaptation Functions for synchronous transparent services.....                                                      | 8         |
| 4.1 Rate Adaptation in A/Gb mode .....                                                                                         | 9         |
| 4.1.1 Rate adaptation - ITU-T V-series .....                                                                                   | 9         |
| 4.1.2 Rate adaptation - ITU-T X.21 .....                                                                                       | 9         |
| 4.1.3 Rate adaptation - ITU-T S-interface .....                                                                                | 9         |
| 4.2 Interchange Circuit Signalling Mapping .....                                                                               | 9         |
| 4.2.1 ITU-T V-series interchange circuit mapping .....                                                                         | 9         |
| 4.2.1.1 Multislot configurations (Channel coding TCH/F9.6 or TCH/F4.8 kbit/s).....                                             | 11        |
| 4.2.1.2 Channel coding TCH/F14.4 and TCH/F28.8 .....                                                                           | 12        |
| 4.2.2 ITU-T X.21 [23] Interchange circuit mapping.....                                                                         | 12        |
| 4.2.3 Case of ITU-T S-interface .....                                                                                          | 12        |
| 4.3 Call establishment signalling mapping at TE/MT interface .....                                                             | 12        |
| 4.3.1 ITU-T V-series interfaces .....                                                                                          | 12        |
| 4.3.1.1 Call establishment manual operation - utilizing Alternate Speech/Data or Speech followed by<br>Data Capabilities ..... | 12        |
| 4.3.1.2 Call establishment manual operation - utilizing the Unrestricted Digital Capability .....                              | 12        |
| 4.3.1.3 ITU-T V.25bis [18] auto call/auto answer .....                                                                         | 12        |
| 4.3.2 ITU-T X-series interfaces .....                                                                                          | 13        |
| 4.3.3 ITU-T S-interface (ITU-T I.420 [11]) signalling mapping .....                                                            | 13        |
| 4.3.4 X.25 Procedures Mapping .....                                                                                            | 13        |
| 5 Terminal Adaptation Functions for synchronous non-transparent services. ....                                                 | 13        |
| 6 V-series interface procedures to 3GPP TS 24.008 [7] mapping.....                                                             | 14        |
| 6.1 Mobile Originated calls .....                                                                                              | 14        |
| 6.2 Mobile Terminated calls.....                                                                                               | 14        |
| 7 ITU-T X.21 [23] interface procedures to 3GPP TS 24.008 [7] mapping.....                                                      | 15        |
| 8 Support for packet service.....                                                                                              | 15        |
| <b>Annex A (normative): L2R Functionality .....</b>                                                                            | <b>16</b> |
| <b>Annex B (informative): Change history .....</b>                                                                             | <b>17</b> |
| History .....                                                                                                                  | 18        |

---

# Foreword

This Technical Specification (TS) has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The present document defines the interfaces and Terminal Adaptation Functions (TAF) integral to a Mobile Termination (MT) which enables the attachment of synchronous terminals to a MT within the 3GPP system.

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

---

# 1 Scope

The present document defines Terminal Adaptation Functions (TAF) which are integrated in a Mobile Termination (MT) and which enable the use of synchronous bearer services in the PLMN and the attachment of Synchronous synchronous Terminals terminals to an MT (see 3GPP TS 24.002 [3]). For the case where asynchronous terminals are attached to the TAF when using synchronous bearer services in the PLMN, the reader is referred to 3GPP TS 27.002 [36] for the asynchronous MT-TAF interface specifics and to the present document for synchronous bearer service specifics on the TAF-IWF interface. The general aspects of Terminal Adaptation Functions are contained in specification 3GPP TS 27.001 [9]. The present document covers support of synchronous data services (see 3GPP TS 22.002 [6]) for the following interfaces and procedures:

- V.22 [15]                DTE/DCE Interface;
- V.22 bis [16]           DTE/DCE Interface;
- V.26 ter [19]           DTE/DCE Interface;
- X.21 bis [24]           DTE/DCE Interface;
- X.32 [30]                Procedure;
- V.25 bis [18]           Procedure;

NOTE: From R99 onwards the support of the following services are no longer required by a PLMN:

- the dual Bearer Services "alternate speech/data" and "speech followed by data";
- the dedicated services for PAD and Packet access;
- BS 21 ... 26 and BS 31 ... 34.

From REL-4 onwards the support of the following service is no longer required by a PLMN:

- the synchronous Bearer Service non-transparent (BS 30 NT).

the Teleservice Facsimile non-transparent (TS 61/62 NT) for A/Gb mode.

The support of these services is still optional. The specification of these services is not within the scope of the present document. For that, the reader is referred to GSM R98 or R99 respectively.

NOTE: Please note that the Gb interface does not play any role in the scope of the present document although the term "A/Gb mode" is used. GERAN Iu mode is for further study.

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1]                Void
- [2]                3GPP TS 43.010: "GSM Public Land Mobile Network (PLMN) connection types".
- [3]                3GPP TS 24.002: "GSM - UMTS Public Land Mobile Network (PLMN) access reference configuration "

- [4] 3GPP TS 44.021: "Rate adaption on the Mobile Station - Base Station System (MS - BSS) interface".
- [5] 3GPP TS 08.20: "Rate adaption on the Base Station System - Mobile-services Switching Centre (BSS - MSC) interface".
- [6] 3GPP TS 22.002: "Circuit Bearer Services (BS) supported by Public Land Mobile Network (PLMN)".
- [7] 3GPP TS 24.008: "Mobile Radio Interface Layer 3 specification; Core Network Protocols-Stage 3".
- [8] Void.
- [9] 3GPP TS 27.001: "General on Terminal Adaptation Functions (TAF) for Mobile Stations (MS)".
- [10] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications ".
- [11] ITU-T Recommendation I.420 (1998): "Basic user-network interface".
- [12] Void.
- [13] Void.
- [14] Void.
- [15] ITU-T Recommendation V.22 (1988): "1200 bits per second duplex modem standardized for use in the general switched telephone network and on point-to-point 2-wire leased telephone-type circuits".
- [16] ITU-T Recommendation V.22 bis (1988): "2400 bits per second duplex modem using the frequency division technique standardized for use on the general switched telephone network and on point-to-point 2-wire leased telephone-type circuits".
- [17] ITU-T Recommendation V.24 (1996): "List of definitions for interchange circuits between data terminal equipment (DTE) and data circuit-terminating equipment (DCE)".
- [18] ITU-T Recommendation V.25 bis (1996): "Synchronous and asynchronous automatic dialling procedures on switched networks".
- [19] ITU-T Recommendation V.26 ter (1988): "2400 bits per second duplex modem using the echo cancellation technique standardized for use on the general switched telephone network and on point-to-point 2-wire leased telephone-type circuits".
- [20] ITU-T Recommendation V.28 (1993): "Electrical characteristics for unbalanced double-current interchange circuits".
- [21] Void.
- [22] ITU-T Recommendation V.110 (1996): "Support of data terminal equipments with V-Series interfaces by an integrated services digital network".
- [23] Void.
- [24] Void.
- [25] Void.
- [26] Void.
- [27] Void.
- [28] Void.
- [29] Void.

- [30] ITU-T Recommendation X.32 (1996): "Interface between Data terminal Equipment (DTE) and Data Circuit-terminating Equipment (DCE) for terminals operating in packet mode and accessing a Packet-Switched Public Data Network through a public switched telephone network or an Integrated Services Digital Network or a Circuit-Switched Public Data Network".
- [31] Void.
- [32] Void.
- [33] Personal Computer Memory Card Association: "PCMCIA 2.1 or PC-Card 3.0 electrical specification or later revisions".
- [34] Infrared Data Association IrDA: "IrPHY Physical layer signalling standard".
- [35] Void.
- [36] 3GPP TS 27.002: "Terminal adaptation functions (TAF) for services using asynchronous bearer capabilities".

## 2.1 Abbreviations

In addition to the abbreviations listed below, the present document also uses terms listed in 3GPP TR 21.905 [10].

|       |                                              |
|-------|----------------------------------------------|
| IrDA  | Infrared Data Association                    |
| IrPHY | InfraredPHYsical layer                       |
| ITU-T | ITU-Telecommunication Standardization Sector |
| MUX   | Multiplexer                                  |

## 2.2 Definitions

The term 'mobile station' (MS) in the present document is synonymous with the term 'user equipment' (UE) as defined in 3GPP TR 21.905[10].

The term 'TE2' in the present document is synonymous with the term 'TE' as defined in 3GPP TR 21.905[10].

The term 'MT2' in the present document is synonymous with the term 'MT' as defined in 3GPP TR 21.905[10].

For the purposes of the present document the following internal definitions apply in addition to those given in 3GPP TS 21.905[10].

**A/Gb mode:** indicates that the text applies only to a system or sub-system which operate in A/Gb mode of operation, i.e. with a functional division that is in accordance with the use of an A or a Gb interface between the radio access network and the core network

**Iu mode:** indicates that the text applies only to a system or a sub-system which operates in Iu mode of operation, i.e. with a functional division that is in accordance with the use of an Iu-CS or Iu-PS interface between the radio access network and the core network

---

# 3 General

## 3.1 Customer access configuration

The PLMN access reference configuration is described in figure 1 of 3GPP TS 24.002 [3] and 3GPP TS 27.001 [9]. The present document specifically refers to the MTs which support terminal equipments (TE1 or TE2) that use synchronous bearer capabilities.



## 3.2 Terminal Adaptation Function

The TAF is functionally part of an MT0, MT1 or MT2 (see 3GPP TS 24.002 [3]). The terminal adaptation provides facilities to allow manual or automatic call control functions associated with circuit switched data services, in case of ITU-T V series interfaces. The following functions are included:

- conversion of electrical, mechanical, functional and procedural characteristics of the ITU-T V-series, type interfaces to those required by a PLMN;
- bit rate adaptation of ITU-T V-series and ITU-T X-series data signalling rates and the ISDN 64 kbit/s to that provided in an A/Gb mode PLMN;
- the mapping of ITU-T V.25 bis [18] AUTO CALL/AUTO ANSWER procedures to the PLMN Layer 3 signalling;
- the mapping functions necessary to convert ITU-T S-interface signalling to PLMN Layer 3 signalling;
- synchronization procedure, which means the task of synchronizing the entry to and the exit from the data transfer phase between two subscriber terminals. This is described in the specification 3GPP TS 27.001 [9];
- filtering of channel control information. This is described in the specification 3GPP TS 27.001 [9];
- compatibility checking (see 3GPP TS 27.001 [9]);
- flow control;
- in Call Modification function (see clause 4);
- splitting and combining of the data flow in case of multi substream data configurations.

## 3.3 TAF Interfacing to other MT functions

TAF interfacing is shown in figure 1.

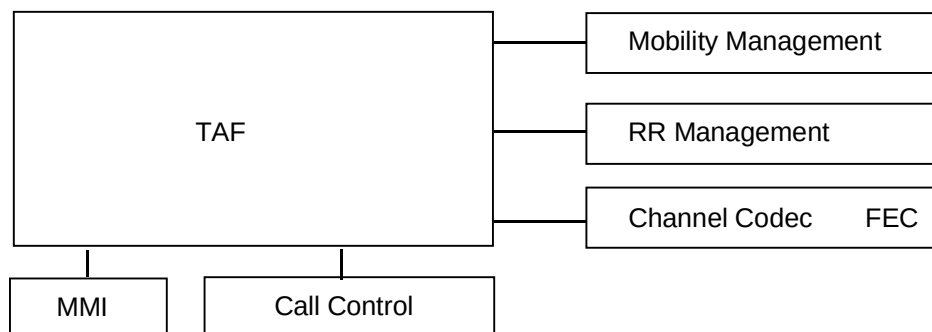


Figure 1: TAF interfacing to other MT functions

---

## 4 Terminal Adaptation Functions for synchronous transparent services


Specification 3GPP TS 43.010 [2] refers to the models for connection types supporting synchronous transparent services.

## 4.1 Rate Adaptation in A/Gb mode

Rate adaptation on the MS-BS interface is described in 3GPP TS 44.021[4]. The synchronous data services make use of the following rate adaptation functions: RA1, RA2, RA1/RA1', RA1' and in case of TCH/F28.8 usage, EDGE-MUX. See also figures 6, 7 and 8 in 3GPP TS 43.010 [2]. The D-bits of the rate adaptation frames are used to convey user data. The S- and X-bits are used to convey channel status information associated with the data bits in the data transfer state, or to carry substream numbering between the Split/Combine functions in case of mult substream operation. For the S- and X-bits, a ZERO corresponds to the ON condition, a ONE to the OFF condition.

### 4.1.1 Rate adaptation - ITU-T V-series

This is provided as indicated in specification 3GPP TS 44.021 [4]. The functions applied in this case are shown in figure 2 (see model 2b in figures 6, 7 and 8 of 3GPP TS 43.010 [2]).

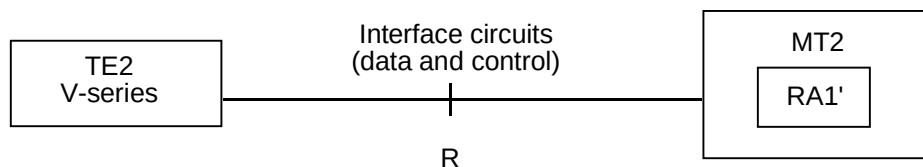

**Figure 2: Rate adaptation for V-series terminals**

### 4.1.2 Rate adaptation - ITU-T X.21

Void.

### 4.1.3 Rate adaptation - ITU-T S-interface

Void.

## 4.2 Interchange Circuit Signalling Mapping

### 4.2.1 ITU-T V-series interchange circuit mapping

The interchange circuit signalling mapping at the interface between the TE2 and the MT shall conform to ITU-T recommendation V.24 [17]. The signal levels at the interface shall conform either to ITU-T recommendation V.28 [20], or to IrDA IrPHY Physical signalling standard specification [34], or to PCMCIA 2.1 [33], or to PC-Card 3.0 [33] electrical specifications or to later revisions.

The signals required at this interface are shown in table 2.

- Specification 3GPP TS 44.021 [4] refers to the frame structure and identifies the use of status bits for the carriage of signalling information.

Status bits SA, SB and X are used to convey channel control information associated with the data bits in the data transfer state. Table 1 shows the mapping scheme between the ITU-T V.24 [17] circuit numbers and the status bits for the transparent mode. It also shows how the unused status bits should be handled. It is derived from the general mapping scheme described in annex C. A binary 0 corresponds to the ON condition, a binary 1 to the OFF condition.

The transport of these status bits by the various channel codings is described in subsequent sections.

**Table 1: Mapping scheme at the MT for the transparent mode**

| Signal at TE2/MT interface or condition within the MT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Mapping direction: MT to IWF | Mapping direction: IWF to MT |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|------------------------------|
| CT 105                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | not mapped (note 1)          |                              |
| CT 106                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                              | from status bit X (note 7)   |
| CT 107                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                              | not mapped (note 5)          |
| CT 108/2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | not mapped (note 6)          |                              |
| CT 109                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                              | from status bit SB (note 7)  |
| CT 133                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | not mapped (note 2)          |                              |
| always ON                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | to status bit SA (note 3)    |                              |
| always ON                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | to status bit SB (note 1)    |                              |
| always ON                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | to status bit X (note 4)     |                              |
| ignored by MT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                              | from status bit SA (note 3)  |
| <p>NOTE 1: The SB bit towards the IWF, according to the General Mapping (3GPP TS 27.002, annex C), could be used to carry CT 105. However, CT 105 should always be ON in the data transfer state since only duplex operation is supported. Also, many DTEs use the connector pin assigned to CT 105 for CT 133. No interchange circuit shall be mapped to the SB bit which shall always be set to ON in the data transfer state.</p> <p>NOTE 2: CT 133 is not mapped since there is no flow control in transparent mode.</p> <p>NOTE 3: The SA bits in both directions are available only with certain channel codings. Therefore, for maximum compatibility, they should not be mapped.</p> <p>NOTE 4: The X bit towards the IWF is not mapped and shall always be set to ON in the data transfer state since there is no flow control in transparent mode.</p> <p>NOTE 5: CT 107 is controlled by the channel synchronization process (3GPP TS 27.001 [9]).</p> <p>NOTE 6: CT 108/2 may be used in the call setup and answering processes.</p> <p>NOTE 7: The status bits are filtered before being mapped to the ITU-T V.24 [17] circuits (3GPP TS 27.001 [9]).</p> |                              |                              |

**Table 2: Minimum set of V-series interchange circuits**

| Circuit Number                                                | Circuit Name                               | Ground | Data   |          | Control |          |
|---------------------------------------------------------------|--------------------------------------------|--------|--------|----------|---------|----------|
|                                                               |                                            |        | to TE2 | from TE2 | to TE2  | from TE2 |
| CT102                                                         | Common Return                              | X      |        |          |         |          |
| CT103                                                         | Transmitted data                           |        |        | X        |         |          |
| CT104                                                         | Received data                              |        | X      |          |         |          |
| CT105                                                         | Request to send                            |        |        |          |         | X        |
| CT106                                                         | Ready for sending                          |        |        |          | X       |          |
| CT107                                                         | Data set ready                             |        |        |          | X       |          |
| CT108.2                                                       | Data terminal ready                        |        |        |          |         | X        |
| CT109                                                         | Data channel received line signal detector |        |        |          | X       |          |
| CT114                                                         | Transmitter signal element timing          |        |        |          | X       |          |
| CT115                                                         | Receiver signal element timing             |        |        |          | X       |          |
| CT125                                                         | Calling in-dicator (note)                  |        |        |          | X       |          |
| NOTE: CT125 is used with the AUTO ANSWER function of the TAF. |                                            |        |        |          |         |          |

**Use of Network Independent Clocking (applicable to A/Gb mode PLMN only):**

Network Independent Clocking is only applicable to calls using ITC value "3.1 kHz audio ex PLMN".

Within the **A/Gb mode PLMN** the coding of the values for bits associated with NIC is specified in 3GPP TS 44.021 [4] and 3GPP TS 08.20 [5]. In the forward (transmitting) direction the multiframes shall be coded in exact accordance with that specified in those specifications. Bit E6 is set to "1" in alternate modified ITU-T V.110 [22] frames at the transmitter. However, the use of this bit at the receiver for monitoring frame Synchronization, or any other purpose, is not specified and is left to the discretion of the implementor.

A "perfect linear block Code" is used in C1-C5, whose error correction properties may be utilized in the receiver, in order to ensure reliable operation of NIC.

The NIC sending function has to recognize when the difference between the applicable clock speed of the **A/Gb mode PLMN** and the interface speed generates a positive or negative whole bit requirement. When this positive or negative condition occurs, the NIC codewords specified in specification 3GPP TS 44.021 [4] are used to transport this condition to the receiving NIC function. Transmission of the codeword shall clear the positive or negative condition related to that codeword at the sending function. The sending function shall not send more than one positive or negative compensation within a contiguous period of time corresponding to 10 000 user data bits minus the number of user data bits necessary to make up an even number of ITU-T V.110 [22] frames. Between compensations (NIC compensation is coded in two ITU-T V.110 [22] frames). This results from the requirements to compensate for maximum clock differences of  $\pm 100$  parts per million. If the receiving function receives NIC compensations more often than a contiguous period of time corresponding to 10 000 user data bits, there is no guarantee that data will not be lost.

The NIC receiving function has to provide the capability to support the compensation requirements of the sending function. This compensation is managed by manipulating the clock speed of the interface, within the standard constraints of that interface.

Overall, the compensation functions have to be capable of managing clock tolerances of  $\pm 100$  parts per million.

The NIC function has to recognize and manage the conversion of the NIC information received incoming from an ISDN terminal Interface. The conversion has to be made to the NIC format used within the **A/Gb mode PLMN** System as defined in specifications 3GPP TS 44.021 [4] and 3GPP TS 08.20 [5]). The NIC function has to manage the conversion of the PLMN NIC format into that used within the ISDN in the traffic direction towards the ISDN terminal interface.

Due to the incompatibility between the ISDN and the **A/Gb mode PLMN** requirements NIC interworking is not provided between these two formats. as such no NIC function is required in providing interworking to the ISDN for unrestricted digital.

**Action on loss of synchronization:**

If five consecutive NIC multiframes have incorrect framing bit values in E7, the receiver shall stop applying clocking compensation to the received data. Resynchronization shall be attempted and compensation shall resume when synchronization is achieved.

**Signal element timing:**

Receiver signal element timing (CT115) is generated by MT2. In the **A/Gb mode PLMN** transparent case, this shall be synchronized to the output of RA1' function. In the UTRAN Iu mode transparent case, this shall be synchronized to output of the RLC. A transition from ON to OFF condition shall nominally indicate the centre of each signal element on CT104.

Transmitter signal element timing is generated by MT2 (CT114), this may be synchronized to CT115.

In the case of alternate Speech/Group 3 Facsimile, there may be a Channel Mode Modify during the course of the facsimile portion of the call. If this occurs, the user data rate changes and this is reflected to the ITU-T V.24 [17] interface as a change in the clock speed on CT 114 and CT 115.

**4.2.1.1 Multislot configurations (Channel coding TCH/F9.6 or TCH/F4.8 kbit/s)**

In transparent multislot configurations status bits S1, S3 and the X-bit between the D12 and D13 in the ITU-T V.110 [22] 80-bit intermediate rate frame - are used for transferring substream numbering information. The S4-bit is used for frame synchronization between the parallel substreams (ref 3GPP TS 44.021[4]).

#### 4.2.1.2 Channel coding TCH/F14.4 and TCH/F28.8

For information on the mapping of the interchange circuit signalling bits in the 14,5 multiframe structure, refer to 3GPP TS 44.021 [4].

#### 4.2.2 ITU-T X.21 [23] Interchange circuit mapping

Void.

#### 4.2.3 Case of ITU-T S-interface

Void.

### 4.3 Call establishment signalling mapping at TE/MT interface

#### 4.3.1 ITU-T V-series interfaces

##### 4.3.1.1 Call establishment manual operation - utilizing Alternate Speech/Data or Speech followed by Data Capabilities

Void.

##### 4.3.1.2 Call establishment manual operation - utilizing the Unrestricted Digital Capability

In this case the user shall not hear network supervisory tones or answer tone. The data transfer phase shall be entered automatically.

##### 4.3.1.3 ITU-T V.25bis [18] auto call/auto answer

The mapping of the ITU-T V.25bis [18] procedures to the messages of the PLMN Layer 3 signalling (3GPP TS 24.008 [7]) is defined in clause 4.

##### **Auto Call:**

This procedure is provided according to ITU-T V.25bis [18] using only circuit 108/2. A subset of ITU-T V.25bis [18] is shown in table 4. This subset gives minimum level of control and indication.

During the call establishment phase, i.e. after signalling, call tone according to ITU-T V.25 bis [18] shall be generated in the IWF, where appropriate.

##### **Auto Answer:**

This procedure is provided according to ITU-T V.25bis [18].

Table 4: Minimum set of ITU-T V.25bis [18] Call Set-up Commands and Indications

|                    | Description                                                                           | IA5Characters |
|--------------------|---------------------------------------------------------------------------------------|---------------|
| Commands from TE2  | <u>C</u> all <u>R</u> equ <u>e</u> st with <u>N</u> umber provided 0,1..9,*,#,A,B,C,D | CRN           |
|                    | <u>D</u> isregard <u>I</u> ncoming <u>C</u> all                                       | DIC           |
|                    | <u>C</u> onnect <u>I</u> ncoming <u>C</u> all                                         | CIC           |
| Indications to TE2 | <u>C</u> all <u>F</u> ailure <u>I</u> ndication                                       | CFI XX        |
|                    | XX = CB,AB,NT,FC (Note)                                                               |               |
|                    | <u>I</u> ncoming <u>C</u> all                                                         | INC           |
|                    | <u>V</u> ALid                                                                         | VAL           |
|                    | <u>I</u> NValid                                                                       | INV           |

NOTE to table 4:   CB = Local MT busy  
                      AB = Abort call  
                      NT = No answer  
                      FC = Forbidden call (\*)

(\*)       Forbidden call indication results from contravention of rules for repeat call attempts as defined by the appropriate national approval administration. It is recommended that this is the responsibility of the MT, not the TE2.

4.3.2     ITU-T X-series interfaces

Void.

4.3.3     ITU-T S-interface (ITU-T I.420 [11]) signalling mapping

Void.

4.3.4     X.25 Procedures Mapping

Void.

---

5         Terminal Adaptation Functions for synchronous non-transparent services.

Void.

## 6 V-series interface procedures to 3GPP TS 24.008 [7] mapping

Interface procedures not directly mappable to 3GPP TS 24.008 [7] (ie. ITU-T V.25 bis [18] VAL/INV) are not considered. Mobile management procedures of 3GPP TS 24.008 [7] are not considered applicable.

Mapping of other call establishment or clearing messages to the S interface e.g. "Call proceeding", etc. have not been included. It is assumed that these may be mapped directly and thus are of no relevance to the ITU-T V.25 bis [18] or manual interface.

### 6.1 Mobile Originated calls

#### a) SET-UP.

| Element            | Derived from                                                                                                                |                             |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------|-----------------------------|
|                    | MMI                                                                                                                         | ITU-T V.25 bis [18] message |
| Called Address     | Keypad                                                                                                                      | CRN/CRI/CRS                 |
| Called Sub Address | Keypad                                                                                                                      | CRI                         |
| HLC                | Derived from internal settings or MMI information.<br>Same as HLC<br>Same as HSC<br>3GPP TS 27.001 [9] gives allowed values |                             |
| LLC                |                                                                                                                             |                             |
| BC                 |                                                                                                                             |                             |
|                    |                                                                                                                             |                             |

#### b) RELEASE COMPLETE.

| Element | Derived from       |                             |
|---------|--------------------|-----------------------------|
|         | MMI                | ITU-T V.25 bis [18] message |
| Cause   | Display (optional) | CFI                         |

### 6.2 Mobile Terminated calls

Call establishment is initiated by receipt of Setup at the MS:

#### a) SET-UP.

| Element            | Mapped on to       |                             |
|--------------------|--------------------|-----------------------------|
|                    | MMI                | ITU-T V.25 bis [18] message |
| Called Address     | Display (optional) | INC                         |
| Called Sub Address | Display (optional) | Not applicable              |
| HLC                | Display (optional) | Not applicable              |
| LLC                | Display (optional) | Not applicable              |
| BC                 | Display (optional) | Not applicable              |

#### b) CALL CONFIRM.

Information for the BC element in the call confirm is derived from e.g. MMI or by internal settings.

#### c) CONNECT.

Connect is sent in response, CIC from ITU-T V.25 bis [18] or in response from MMI.

---

## 7 ITU-T X.21 [23] interface procedures to 3GPP TS 24.008 [7] mapping

Void.

---

## 8 Support for packet service

Void.



---

## Annex A (normative): L2R Functionality

Void

## Annex B (informative): Change history

| Change history |        |           |     |     |                                                                          |                                         |        |
|----------------|--------|-----------|-----|-----|--------------------------------------------------------------------------|-----------------------------------------|--------|
| Date           | TSG #  | TSG Doc.  | CR  | Rev | Subject/Comment                                                          | Old                                     | New    |
| 04-1999        |        |           |     |     | Transferred to 3GPP CN1                                                  | 6.0.0                                   |        |
|                | CN#03  |           |     |     | Approved at CN#03                                                        |                                         | 3.0.0  |
|                | CN#04  |           | 001 |     | Introduction of EDGE                                                     | 3.0.0                                   | 3.1.0  |
|                | CN#06  |           | 002 |     | Introduction of Asynchronous interface for Real-time non-transparent FAX | 3.1.0                                   | 3.2.0  |
|                | CN#06  |           | 003 |     | R99 service clean-up (also subclause 8.3 removed)                        | 3.1.0                                   | 3.2.0  |
|                | CN#07  |           | 004 |     | UMTS clean up                                                            | 3.2.0                                   | 3.3.0  |
|                | CN#08  |           | 005 |     | Adaptations for UMTS                                                     | 3.3.0                                   | 3.4.0  |
|                | CN#09  |           | 006 |     | Modification from V.25bis to V.250                                       | 3.4.0                                   | 3.5.0  |
|                | CN#10  |           | 007 |     | Removal of BS 30 NT                                                      | 3.5.0                                   | 4.0.0  |
| 03-2001        | TSG#11 | NP-010046 | 008 |     | Removal of Fax NT in GSM from Rel-4                                      | 4.0.0                                   | 4.1.0  |
| 12-2001        | TSG#14 | NP-010604 | 009 |     | Terminology clarifications as requested by TSG GERAN                     | 4.1.0                                   | 5.0.0  |
| 12-2004        | CN#26  |           |     |     | Upgraded to v6.0.0                                                       | 5.0.0                                   | 6.0.0  |
| 06-2007        | CT#36  |           |     |     | Upgraded to v7.0.0                                                       | 6.0.0                                   | 7.0.0  |
| 12-2008        | CT#42  |           |     |     | Upgraded to v8.0.0 due to simple upgrade without no technical change     | 7.0.0                                   | 8.0.0  |
| 12-2009        | CT#46  |           |     |     | Automatic upgrade from previous Release                                  | 8.0.0                                   | 9.0.0  |
| 03-2011        | CT#51  |           |     |     | Automatic upgrade from previous Release version 9.0.0                    | 9.0.0                                   | 10.0.0 |
| 03-2011        | CT#51  |           |     |     | Correction of heading and numbering made by MCC                          | 10.0.0                                  | 10.0.1 |
| 09-2012        | CT#57  |           |     |     | Automatic upgrade from previous Release version 10.0.1                   | 10.0.1                                  | 11.0.0 |
| 10-2014        |        |           |     |     | Automatic upgrade from previous Release                                  | 11.0.0                                  | 12.0.0 |
| 12-2015        |        |           |     |     | Automatic upgrade from previous Release                                  | 12.0.0                                  | 13.0.0 |
| Change history |        |           |     |     |                                                                          |                                         |        |
| Date           | TSG #  | TSG Doc.  | CR  | Rev | Cat                                                                      | Subject/Comment                         | New    |
| 2017-03        | CT#75  |           |     |     |                                                                          | Automatic upgrade from previous Release | 14.0.0 |
| 2018-06        | CT#80  |           |     |     |                                                                          | Automatic upgrade from previous Release | 15.0.0 |
| 2020-06        | CT#88e | -         | -   | -   |                                                                          | Update to Rel-16 version (MCC)          | 16.0.0 |
| 2022-03        | SA#95e | -         | -   | -   |                                                                          | Update to Rel-17 version (MCC)          | 17.0.0 |
| 2024-03        | SA#103 | -         | -   | -   |                                                                          | Update to Rel-18 version (MCC)          | 18.0.0 |
| 2025-09        | SA#109 | -         | -   | -   |                                                                          | Update to Rel-19 version (MCC)          | 19.0.0 |

---

# History

| Document history |              |             |
|------------------|--------------|-------------|
| V19.0.0          | October 2025 | Publication |
|                  |              |             |
|                  |              |             |
|                  |              |             |
|                  |              |             |