

**Integrated Services Digital Network (ISDN);
Message Waiting Indication (MWI) supplementary service;
Digital Subscriber Signalling System No. one (DSS1) protocol;
Part 6: Abstract Test Suite (ATS) and partial Protocol
Implementation eXtra Information for Testing (PIXIT) proforma
specification for the network**



Reference

DEN/SPS-05069-6 (6wdi0ipc.PDF)

Keywords

ISDN, DSS1, supplementary service, ATS, PIXIT,
user

ETSI

Postal address

F-06921 Sophia Antipolis Cedex - FRANCE

Office address

650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16
Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Internet

secretariat@etsi.fr
Individual copies of this ETSI deliverable
can be downloaded from
<http://www.etsi.org>
If you find errors in the present document, send your
comment to: editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

Contents

Intellectual Property Rights.....	5
Foreword	5
1 Scope.....	6
2 References.....	6
3 Definitions and abbreviations	7
3.1 Definitions	7
3.2 Abbreviations.....	7
4 Abstract Test Method (ATM).....	7
4.1 Description of ATM used	7
4.2 Served user test cases.....	8
4.3 Remote user test cases	8
5 Untestable test purposes.....	8
6 ATS conventions.....	9
6.1 Version of TTCN used.....	9
6.2 Use of ASN.1	9
6.2.1 Situations where ASN.1 is used	9
6.2.2 Specification of encoding rules	9
6.3 Conventions for variables and parameters	10
7 ATS to TP map	10
8 PCTR conformance.....	10
9 PIXIT conformance.....	10
10 ATS conformance	11
Annex A (normative): Protocol Conformance Test Report (PCTR) proforma.....	12
A.1 Identification summary	12
A.1.1 Protocol conformance test report.....	12
A.1.2 IUT identification	12
A.1.3 Testing environment	12
A.1.4 Limits and reservations	13
A.1.5 Comments	13

A.2	IUT conformance status	13
A.3	Static conformance summary	13
A.4	Dynamic conformance summary.....	13
A.5	Static conformance review report	14
A.6	Test campaign report.....	15
A.7	Observations.....	17
Annex B (normative): Partial PIXIT proforma.....		18
B.1	Identification summary	18
B.2	Abstract test suite summary	18
B.3	Test laboratory	18
B.4	Client (of the test laboratory).....	19
B.5	System Under Test (SUT).....	19
B.6	Protocol information	20
B.6.1	Protocol identification.....	20
B.6.2	IUT information	20
B.6.2.1	Parameter values	20
B.6.2.2	Configuration of IUT	20
B.6.2.3	Timer values.....	21
B.6.2.4	Number information parameter values	21
B.7	Basic call PIXIT items	22
B.7.1	Parameter values - information element codings	22
Annex C (normative): Abstract Test Suite (ATS).....		23
C.1	The TTCN Graphical form (TTCN.GR).....	23
C.2	The TTCN Machine Processable form (TTCN.MP)	23
Bibliography		24
History		25

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available **free of charge** from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Signalling Protocols and Switching (SPS), and is now submitted for the Public Enquiry phase of the ETSI standards Two-step Approval Procedure.

The present document is part 6 of a multi-part standard covering the Digital Subscriber Signalling System No. one (DSS1) protocol specification for the Integrated Services Digital Network (ISDN) Message Waiting Indication (MWI) supplementary service, as described below:

- Part 1: "Protocol specification";
- Part 2: "Protocol Implementation Conformance Statement (PICS) proforma specification";
- Part 3: "Test Suite Structure and Test Purposes (TSS&TP) specification for the user";
- Part 4: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the user";
- Part 5: "TSS&TP specification for the network";
- Part 6: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the network".**

Proposed national transposition dates	
Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	6 months after doa

1 Scope

The present document specifies the Abstract Test Suite (ATS) and the partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma for the Network side of the T reference point or coincident S and T reference point of implementations conforming to the stage three standard for the Message Waiting Indication (MWI) supplementary service for the pan-European Integrated Services Digital Network (ISDN) by means of the Digital Subscriber Signalling System No. one (DSS1) protocol, EN 300 745-1 [1].

EN 300 745-5 [2] specifies the Test Suite Structure and Test Purposes (TSS&TP) related to this ATS and partial PIXIT proforma specification. Other parts specify the TSS&TP and the ATS and partial PIXIT proforma for the User side of the T reference point or coincident S and T reference point of implementations conforming to EN 300 745-1 [1].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, subsequent revisions do apply.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

- [1] EN 300 745-1 (V1.2): "Integrated Services Digital Network (ISDN); Message Waiting Indication (MWI) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [2] EN 300 745-5 (V1.2): "Integrated Services Digital Network (ISDN); Message Waiting Indication (MWI) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 5: Test Suite Structure and Test Purposes (TSS&TP) specification for the network".
- [3] EN 300 196-1: "Integrated Services Digital Network (ISDN); Generic functional protocol for the support of supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [4] ISO/IEC 9646: "Information technology -- Open Systems Interconnection -- Conformance testing methodology and framework" (all parts).
- [5] TR 101 101 (V1.1): "Methods for Testing and Specification (MTS); TTCN interim version including ASN.1 1994 support [ISO/IEC 9646-3] (Second Edition Mock-up for JTC1/SC21 Review)".
- [6] ISO/IEC 8825-1: "Information technology - Encoding Rules for Abstract Syntax Notation One (ASN.1) - Part 1 : Specification of Basic Encoding Rules (BER), Canonical Encoding Rules (CER) and Distinguished Encoding Rules (DER)".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in ISO/IEC 9646 [4] apply.

3.2 Abbreviations

For the purposes of the present document, the following symbols apply:

ATM	Abstract Test Method
ATS	Abstract Test Suite
BER	Basic Encoding Rules
CM	Co-ordination Message
DSS1	Digital Subscriber Signalling System No. one
ETS	Executable Test Suite
ISDN	Integrated Services Digital Network
IUT	Implementation Under Test
MOT	Means Of Testing
MTC	Main Test Component
MWI	Message Waiting Indication
PCO	Point of Control and Observation
PCTR	Protocol Conformance Test Report
PDU	Protocol Data Unit
PICS	Protocol Implementation Conformance Statement
PIXIT	Protocol Implementation eXtra Information for Testing
PTC	Parallel Test Component
SUT	System Under Test
TP	Test Purpose
TSS&TP	Test Suite Structure and Test Purposes
TTCN	Tree and Tabular Combined Notation

4 Abstract Test Method (ATM)

4.1 Description of ATM used

The requirement for testing the network Implementation Under Test (IUT) is to focus on the behaviour of the network IUT at the user-network interface where a T reference point or coincident S and T reference point applies. Thus the IUT is the network DSS1 protocol entity at a particular user-network interface and is not the whole network.

In practice the behaviour at a single user-network interface does not occur in isolation, but depends on the activity at other user-network interfaces. Therefore a multi-party test method is used.

The general configuration used is shown in figure 1. In this ATS the PTCs act as slaves to the Main Test Component (MTC); all active behaviour at the PTCs is initiated by CMs sent by the MTC and all verdicts are assigned by the MTC (using information sent in CMs by the PTCs where appropriate). Not all components are used in every test case and the relationship between the IUT and the tester depends on the test group.

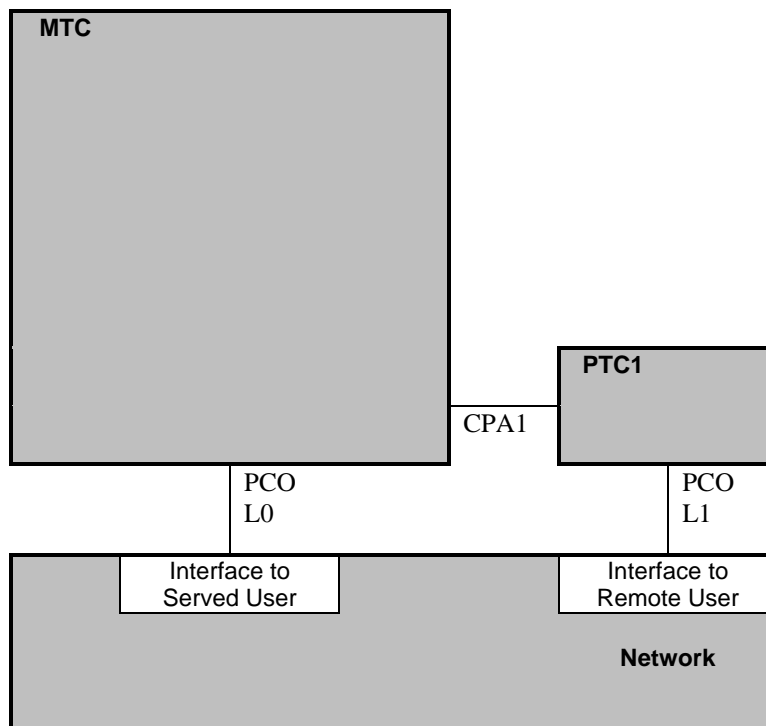


Figure 1: Multi-party test method

4.2 Served user test cases

For these test cases the IUT is connected to the MTC. The verdict depends only on the behaviour observed at the Point of Control and Observation (PCO) between the IUT and the MTC. The Parallel Test Component (PTC) is used only to provoke the IUT to send messages to the MTC or to handle behaviour at the remote user interface as a result of activity at the IUT interface.

In general the correlation of messages between the served and remote user interfaces (which is part of the functionality of the supplementary service rather than the protocol) is not tested. If a message is expected at the MTC as a result of an action at a remote user and is not received this usually leads to an inconclusive verdict.

4.3 Remote user test cases

For these test cases the IUT is the protocol entity connected to PTC1. The verdict is assigned by the MTC on the basis of behaviour reported in a Co-ordination Message (CM) by the PTC connected to the IUT and the behaviour of the served user attached to the MTC. A consequence of this is that incorrect behaviour by the served user can lead to a Fail verdict.

5 Untestable test purposes

There are no untestable test cases associated with this ATS and ATM.

6 ATS conventions

6.1 Version of TTCN used

The version of Tree and Tabular Combined Notation (TTCN) used is that defined in TR 101 101 [5].

6.2 Use of ASN.1

6.2.1 Situations where ASN.1 is used

ASN.1 has been used for three major reasons. First, types defined in ASN.1 can model problems that "pure" TTCN cannot. For instance, data structures modelling ordered or unordered sequences of data are preferably defined in ASN.1. Second, ASN.1 provides a better restriction mechanism for type definitions by using sub-type definitions. Third, it is necessary to use ASN.1 to reproduce the type definitions for remote operation components as specified in the base standards in ASN.1.

The possibility to use TTCN and ASN.1 in combination is used, i.e. referring to an ASN.1 type from a TTCN type.

6.2.2 Specification of encoding rules

There is a variation in the encoding rules applied to ASN.1 types and constraints specified in this ATS and therefore a mechanism is needed to differentiate the encoding rules. However the mechanism specified in ISO/IEC 9646-3/AM2 [4] and in TR 101 101 [5] does not facilitate definition of the encoding rules as needed for this ATS. A solution is therefore used which is broadly in the spirit of ISOIEC 9646-3/AM2 [4] in which comment fields have been used as a means of encoding rules.

For ASN.1 used in this ATS, two variations of encoding rules are used. One is the commonly known Basic Encoding Rules (BER) as specified in ISO/IEC 8825-1 [6]. In the second case the encoding is according to ISDN, i.e. the ASN.1 data types are a representation of structures contained within the ISDN specification (basic call, Generic functional protocol or individual supplementary service). For example, if octets of an information element are specified in ASN.1 as a SEQUENCE then this should be encoded in an Executable Test Suite (ETS) as any other ISDN information element specified using tabular TTCN. This ISDN encoding variation is the default encoding rule for this ATS. This means that all ASN.1 constraint tables are encoded using ISDN (non-BER) encoding unless stated otherwise. BER encoding should never be applied to an ASN.1 constraint where BER encoding has not been specified. This encoding rule is sometimes named "Direct Encoding".

For BER encoding, an indication is given in the comments field of the table header. For this ATS such indications appear in the ASN.1 type constraint declaration tables only. In the first line of the table header comment field, the notation "ASN1_Encoding: *BER*" is used.

Note that within BER, there are a number of variations for the encoding of lengths of fields. According to EN 300 196-1 [3], an IUT should be able to interpret all length forms within BER for received PDU's. When sending PDU's containing BER encoding, EN 300 196-1 [3] gives guidelines but makes no restrictions on the length forms within BER which an IUT may apply.

In this particular ATS all ASN.1 type constraints which are of type "Component" are to be encoded using BER.

Table 1: ASN.1 type constraint declaration showing use of encoding variation

ASN.1 Type Constraint Declaration	
Constraint Name	: DeactInv3
ASN.1 Type	: Component
Derivation Path	:
Comments	: ASN1_Encoding: BER Receive component: MWI Deactivate Invoke component with no optional parameters
Description	
<pre> mWIDeactivate_Components mWIDeactivate_InvokeComp { invokeID ? , operation_value globalValue mWIDeactivate, argument { receivingUserNr ? , basicservice ? } } </pre>	
Detailed comments	:

6.3 Conventions for variables and parameters

MTCA

call reference	CREF1	(to PTC1)
B channel (basic)	bch_num1	
channel nr (primary)	CH_NUM1	

7 ATS to TP map

The identifiers used for the TPs are reused as test case names. Thus there is a straightforward one-to-one mapping.

8 PCTR conformance

A test laboratory, when requested by a client to produce a Protocol Conformance Test Report (PCTR), is required, as specified in ISO/IEC 9646-5 [4], to produce a PCTR conformant with the PCTR template given in annex B of ISO/IEC 9646-5 [4].

Furthermore, a test laboratory, offering testing for the ATS specification contained in annex C, when requested by a client to produce a PCTR, is required to produce a PCTR conformant with the PCTR proforma contained in annex A.

A PCTR which conforms to this PCTR proforma specification shall preserve the content and ordering of the clauses contained in annex A. Clause A.6 of the PCTR may contain additional columns. If included, these shall be placed to the right of the existing columns. Text in *italics* may be retained by the test laboratory.

9 PIXIT conformance

A test realizer, producing an executable test suite for the ATS specification contained in annex C, is required, as specified in ISO/IEC 9646-4 [4], to produce an augmented partial PIXIT proforma conformant with this partial PIXIT proforma specification.

An augmented partial PIXIT proforma which conforms to this partial PIXIT proforma specification shall, as a minimum, have contents which are technically equivalent to annex B. The augmented partial PIXIT proforma may contain additional questions that need to be answered in order to prepare the Means Of Testing (MOT) for a particular IUT.

A test laboratory, offering testing for the ATS specification contained in annex C, is required, as specified in ISO/IEC 9646-5 [4], to further augment the augmented partial PIXIT proforma to produce a PIXIT proforma conformant with this partial PIXIT proforma specification.

A PIXIT proforma which conforms to this partial PIXIT proforma specification shall, as a minimum, have contents which are technically equivalent to annex B. The PIXIT proforma may contain additional questions that need to be answered in order to prepare the test laboratory for a particular IUT.

10 ATS conformance

The test realizer, producing MOT and ETS for this ATS specification, shall comply with the requirements of ISO/IEC 9646-4 [4]. In particular, these concern the realization of an ETS based on each ATS. The test realizer shall provide a statement of conformance of the MOT to this ATS specification.

An ETS which conforms to this ATS specification shall contain test groups and test cases which are technically equivalent to those contained in the ATS in annex C. All sequences of test events comprising an abstract test case shall be capable of being realized in the executable test case. Any further checking which the test system might be capable of performing is outside the scope of this ATS specification and shall not contribute to the verdict assignment for each test case.

Test laboratories running conformance test services using this ATS shall comply with ISO/IEC 9646-5 [4].

A test laboratory which claims to conform to this ATS specification shall use an MOT which conforms to this ATS.

Annex A (normative): Protocol Conformance Test Report (PCTR) proforma

Notwithstanding the provisions of the copyright clause related to the text of the present document, ETSI grants that users of the present document may freely reproduce the PCTR proforma in this annex so that it can be used for its intended purposes and may further publish the completed PCTR.

A.1 Identification summary

A.1.1 Protocol conformance test report

PCTR number:	
PCTR date:	
Corresponding SCTR number:	
Corresponding SCTR date:	
Test laboratory identification:	
Test laboratory manager:	
Signature:	

A.1.2 IUT identification

Name:	
Version:	
Protocol specification:	EN 300 369-1
PICS:	
Previous PCTRs (if any):	

A.1.3 Testing environment

PIXIT reference number:	
ATS specification:	EN 300 369-6
Abstract test method:	Multi-party test method (see ISO/IEC 9646-2)
Means of testing identification:	
Dates of testing:	
Conformance log reference(s):	
Retention date for log reference(s):	

A.1.4 Limits and reservations

Additional information relevant to the technical contents or further use of the test report, or to the rights and obligations of the test laboratory and the client, may be given here. Such information may include restriction on the publication of the report.

.....

.....

.....

.....

A.1.5 Comments

Additional comments may be given by either the client or the test laboratory on any of the contents of the PCTR, for example, to note disagreement between the two parties.

.....

.....

.....

.....

A.2 IUT conformance status

This IUT has / has not been shown by conformance assessment to be non-conforming to the specified protocol specification.

Strike the appropriate words in this sentence. If the PICS for this IUT is consistent with the static conformance requirements (as specified in clause A.3 of this report) and there are no "FAIL" verdicts to be recorded (in clause A.6) strike the words "has", otherwise strike the words "has not".

A.3 Static conformance summary

The Protocol Implementation Conformance Statement (PICS) for this IUT is / is not consistent with the static conformance requirements in the specified protocol.

Strike the appropriate words in this sentence.

A.4 Dynamic conformance summary

The test campaign did / did not reveal errors in the IUT.

Strike the appropriate words in this sentence. If there are no "FAIL" verdicts to be recorded (in clause A.6 of this report) strike the word "did", otherwise strike the words "did not".

Summary of the results of groups of tests:

.....

.....

.....

A.5 Static conformance review report

If clause A.3 indicates non-conformance, this clause itemizes the mismatches between the PICS and the static conformance requirements of the specified protocol specification.

.....

.....

.....

.....

.....

.....

A.6 Test campaign report

ATS reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
MWI_N01_001				
MWI_N01_002				
MWI_N01_003				
MWI_N01_004				
MWI_N01_005				
MWI_N01_006				
MWI_N01_007				
MWI_N01_008				
MWI_N01_009				
MWI_N01_010				
MWI_N01_011				
MWI_N01_012				
MWI_N02_001				
MWI_N02_002				
MWI_N02_003				
MWI_N02_004				
MWI_N02_005				
MWI_N02_006				
MWI_N02_007				
MWI_N02_008				
MWI_N02_009				
MWI_N02_010				
MWI_N03_001				
MWI_N03_002				
MWI_N03_003				
MWI_N03_004				
MWI_N03_005				
MWI_N03_006				
MWI_N04_001				
MWI_N04_002				
MWI_N04_003				
MWI_N04_004				
MWI_N04_005				
MWI_N04_006				
MWI_N04_007				
MWI_N04_008				
MWI_N04_009				
MWI_N04_010				
MWI_N04_011				
MWI_N04_012				
MWI_N05_001				
MWI_N05_002				
MWI_N05_003				
MWI_N05_004				
MWI_N05_005				
MWI_N05_006				
MWI_N05_007				
MWI_N05_008				
MWI_N05_009				
MWI_N05_010				
MWI_N06_001				
MWI_N06_002				
MWI_N06_003				
MWI_N06_004				
MWI_N06_005				
MWI_N06_006				
MWI_N06_007				
MWI_N06_008				
MWI_N06_009				
MWI_N06_010				

ATS reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
MWI_N06_011				
MWI_N07_001				
MWI_N07_002				
MWI_N07_003				
MWI_N07_004				
MWI_N07_005				
MWI_N07_006				
MWI_N07_007				
MWI_N07_008				
MWI_N07_009				
MWI_N07_010				
MWI_N07_011				

Annex B (normative): Partial PIXIT proforma

Notwithstanding the provisions of the copyright clause related to the text of the present document, ETSI grants that users of the present document may freely reproduce the partial PIXIT proforma in this annex so that it can be used for its intended purposes and may further publish the completed PIXIT.

B.1 Identification summary

PIXIT number:

.....

Test laboratory name:

.....

Date of issue:

.....

Issued to:

.....

B.2 Abstract test suite summary

Protocol specification: EN 300 745-2

ATS specification: EN 300 745-2

Abstract test method: Multi-party test method (see ISO/IEC 9646-2)

B.3 Test laboratory

Test laboratory identification:

.....

Accreditation status of the test service:

.....

Accreditation reference:

.....

Test laboratory manager:

.....

Test laboratory contact:

.....

Means of testing:

.....

Test laboratory instructions for completion:

.....

B.4 Client (of the test laboratory)

Client identification:

.....

Client test manager:

.....

Client contact:

.....

Test facilities required:

.....

B.5 System Under Test (SUT)

Name:

.....

Version:

.....

SCS reference:

.....

Machine configuration:

.....

Operating system identification:

.....

IUT identification:

.....

PICS (all layers):

.....

.....

Limitations of the SUT:

.....

Environmental conditions:

.....

B.6 Protocol information

B.6.1 Protocol identification

Specification reference: EN 300 745-1

Protocol version:

PICS reference:

NOTE: The PICS reference should reference a completed PICS which is conformant with the PICS proforma contained in EN 300 745-2.

B.6.2 IUT information

B.6.2.1 Parameter values

Table B.1: Parameter values

Item	Question	Supported? (Y/N)	Allowed values	Value
1.1	Does the IUT support basic access?		N/A	N/A
1.2	What length of Call Reference is used?		1, 2	
1.3	Indicate the basic service being used?			
1.4	Indicate the invocation mode being used?			

B.6.2.2 Configuration of IUT

Table B.2: Actions required to configure the IUT

Item	Action: What actions, if possible, have to be taken to configure the IUT ...	Supported? (Y/N)	Stimulus (action taken)
2.1	for access NOT subscribed to MWI supplementary service?		
2.2	to preclude the provision of the MWI supplementary service by the supplementary services interactions procedures?		
2.3	to have exceeded the number of controlling users?		
2.4	so that the network cannot activate MWI due to the resource being unavailable"?		
2.5	to have exceeded the number of active instances?		
2.6	to be configured in point-to-multipoint?		
2.7	to be unable to select B-channels?		
2.8	so that it may be configured with the deferred invocation mode?		
2.9	so that it may be configured with the immediate invocation mode?		
3.0	so that it may be configured with the combined invocation mode?		

B.6.2.3 Timer values

Table B.3: Timer values

Item	Timer duration	Supported? (Y/N)	Allowed values	Value
3.1	T-ACTIVATE duration in s?		(= 10)	
3.2	T-DEACTIVATE duration in s?		(= 10)	
3.3	Wait for the test operator to perform an implicit send action or to wait for a PTC to react (T_WAIT). Duration in s.		integer	
3.4	Wait for the IUT to respond to a stimulus sent by the tester (TAC). Duration in s.		integer	
3.5	Control that the IUT does not respond to a stimulus sent by the tester (TNOAC). Duration in s.		integer	
3.6	Wait for RESTART messages after establishment of the multiple frame operation (T_RESTART). Duration in s.		integer	
3.7	Does the IUT send RESTART messages after re-establishment of the multiple frame operation.		Boolean	N/A

B.6.2.4 Number information parameter values

Table B.4: Parameter values

Item	Question	Supported? (Y/N)	Value
4.1	Give the coding for a receiving user number		
4.2	Give the coding for a controlling user number		
4.3	Give the coding of a controlling user provided number		
4.4	Give the coding for an invalid receiving user number		
4.5	Give the coding for an invalid served user number		
4.6	Give the coding for an unsubscribed receiving user number		
4.7	Give the coding for the message identification		
4.8	Give the coding for an unregistered controlling user number		
4.9	Give the coding for an unsubscribed controlling user number		

B.7 Basic call PIXIT items

B.7.1 Parameter values - information element codings

Table B.5: Codings of information elements

Item	Information element: provide, if possible, ...	Supported? (Y/N)	Value
N1.1	a coding of a Bearer Capability information element, which the IUT is compatible with, for the purpose of accepting received SETUP messages and which may be used in SETUP messages to be transmitted		
N1.2	a coding of a High layer compatibility information element, which the IUT is compatible with, for the purpose of accepting received SETUP messages and which may be used in SETUP messages to be transmitted		
N1.3	a coding of a Low layer compatibility information element, which the IUT is compatible with, for the purpose of accepting received SETUP messages and which may be used in SETUP messages to be transmitted		
N1.4			
N1.4	a Called party number information element, which the IUT is compatible with, for ...		
N1.4.1	served user access		
N1.4.2	first remote user		
N1.5	preferred channel number to be used for the purpose of accepting received SETUP messages, for ... (note 1)		
N1.5.1	single call at served user side		
N1.5.2	second call at served user side		
NOTE 1: Items N1.5.1 to N1.5.2 are applicable for primary rate access only.			
NOTE 2: As this is a general table used for all supplementary services, all items N1.4.1 to N1.4.2, and N1.5.1 to N1.5.2 (if primary rate access is supported), are not always required, but should be supplied if possible.			

Annex C (normative): Abstract Test Suite (ATS)

This ATS has been produced using the Tree and Tabular Combined Notation (TTCN) according to ISO/IEC 9646-3 [4].

The ATS was developed on a separate TTCN software tool and therefore the TTCN tables are not completely referenced in the contents table. The ATS itself contains a test suite overview part which provides additional information and references .

C.1 The TTCN Graphical form (TTCN.GR)

The TTCN.GR representation of this ATS is contained in an Adobe Portable Document Format™ file (sp506961.PDF contained in archive 6wdi0ipc.ZIP) which accompanies the present document.

C.2 The TTCN Machine Processable form (TTCN.MP)

The TTCN.MP representation corresponding to this ATS is contained in an ASCII file (sp506961.MP contained in archive 6wdi0ipc.ZIP) which accompanies the present document.

NOTE: According to ISO/IEC 9646-3 [4], in case of a conflict in interpretation of the operational semantics of TTCN.GR and TTCN.MP, the operational semantics of the TTCN.GR representation takes precedence.

Bibliography

The following material, though not specifically referenced in the body of the present document (or not publicly available), gives supporting information.

- ITU-T Recommendation Q.931 (1993): "ISDN user-network interface layer 3 specification for basic call control".
- ITU-T Recommendation X.690 (1994): "Information technology – ASN.1 encoding rules: Specification of Basic Encoding Rules (BER), Canonical Encoding Rules (CER) and Distinguished Encoding Rules (DER)".
- EN 300 745-2 (V1.2): "Integrated Services Digital Network (ISDN); Message Waiting Indication (MWI) supplementary service; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 2: Protocol Implementation Conformance Statement (PICS) proforma specification".
- ETS 300 196-2: "Integrated Services Digital Network (ISDN); Generic functional protocol for the support of supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 2: Protocol Implementation Conformance Statement (PICS) proforma specification".
- EN 300 403-1: "Integrated Services Digital Network (ISDN); Digital Subscriber Signalling System No. one (DSS1) protocol; Signalling network layer for circuit-mode basic call control; Part 1: Protocol specification".

History

Document history			
V1.2.2	January 1999	Public Enquiry	PE 9918: 1999-01-01 to 1999-04-30