
ETSI TS 136 133 V8.4.0 (2009-01)

Technical Specification

LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); Requirements for support of radio resource management (3GPP TS 36.133 version 8.4.0 Release 8)

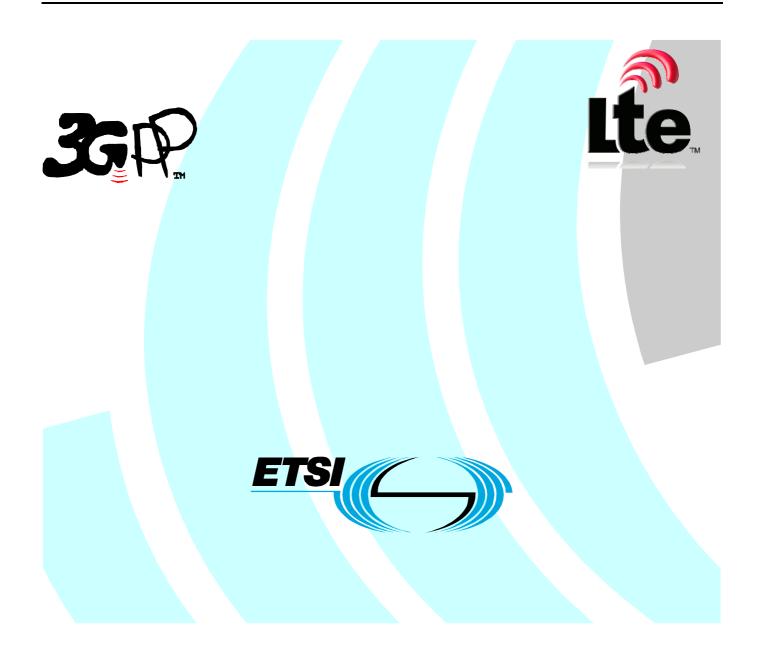

Reference RTS/TSGR-0436133v840

Keywords

LTE

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from: http://www.etsi.org

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at http://portal.etsi.org/tb/status/status.asp

If you find errors in the present document, please send your comment to one of the following services: <u>http://portal.etsi.org/chaircor/ETSI_support.asp</u>

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

> © European Telecommunications Standards Institute 2009. All rights reserved.

DECTTM, **PLUGTESTSTM**, **UMTSTM**, **TIPHON**TM, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPP[™] is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

LTE[™] is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://webapp.etsi.org/IPR/home.asp).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <u>http://webapp.etsi.org/key/queryform.asp</u>.

Contents

Intelle	ntellectual Property Rights		
Forew	ord	2	
Forew	ord	9	
1	Scope	10	
2	References	10	
	Definitions, symbols and abbreviations		
3.1	Definitions		
3.2	Symbols		
3.3	Abbreviations		
3.4	Test tolerances	13	
4	E-UTRAN RRC_IDLE state mobility	13	
4.1	Cell Selection	13	
4.2	Cell Re-selection	13	
4.2.1	Introduction		
4.2.2	Requirements		
4.2.2.1			
4.2.2.2			
4.2.2.3			
4.2.2.4			
4.2.2.5			
4.2.2.5			
4.2.2.5			
4.2.2.5			
4.2.2.5			
4.2.2.5			
4.2.2.7			
4.2.2.8			
5	E-UTRAN RRC_CONNECTED state mobility		
5.1	E-UTRAN Handover	20	
5.1.1	Introduction		
5.1.2	Requirements		
5.1.2.1			
5.1.2.1			
5.1.2.1	1		
5.2.2.2			
5.2.2.2			
5.2.2.2			
5.2.2.3			
5.2.2.3			
5.2.2.3			
5.2.2.4 5.2.2.4			
5.2.2.4	5		
5.2.2.4 5.3	Handover to other RATs		
5.3.1	E-UTRAN - UTRAN FDD Handover		
5.3.1.1			
5.3.1.1			
5.3.1.1			
5.3.2	E-UTRAN - UTRAN TDD Handover		
5.3.2.1			
5.3.2.2			
5.3.2.2			
	-		

5.3.2.2.2	Interruption time	
5.3.3	E-UTRAN - GSM Handover	25
5.3.3.1	Introduction	25
5.3.3.2	Requirements	25
5.3.3.2.1	Handover delay	
5.3.3.2.2	Interruption time	
5.4	Handover to Non-3GPP RATs	
5.4.1	E-UTRAN – HRPD Handover.	
5.4.1.1	Introduction	
5.4.1.1.1	Handover delay	
5.4.1.1.2		
	Interruption time	
5.4.2	E-UTRAN – cdma2000 1X Handover	
5.4.2.1	Introduction	
5.4.2.1.1	Handover delay	
5.4.2.1.2	Interruption time	27
6 RI	RC Connection Mobility Control	77
6.1	RRC Re-establishment	
6.1.1	Introduction	
6.1.2	Requirements	
6.1.2.1	UE Re-establishment delay requirement	
6.2	Random Access	
6.2.1	Introduction	28
6.2.2	Requirements	28
6.2.2.1	Contention based random access	28
6.2.2.1.1	Correct behaviour when receiving Random Access Response reception	28
6.2.2.1.2	Correct behaviour when not receiving Random Access Response reception	
6.2.2.1.3	Correct behaviour when receiving a NACK on msg3	
6.2.2.1.4	Correct behaviour when msg3 HARQ transmissions number reaching the maximum allowed	1
0.2.2.1.7	number	
6.2.2.1.5	Correct behaviour when receiving msg4	
6.2.2.1.6	Correct behaviour when contention Resolution timer expires	
6.2.2.2	Non-Contention based random access	
6.2.2.2.1	Correct behaviour when receiving Random Access Response	
6.2.2.2.2	Correct behaviour when not receiving Random Access Response	29
7 Ti	ming and signalling characteristics	30
7.1	UE transmit timing	
7.1.1	Introduction	
7.1.2	Requirements	
7.2	UE timer accuracy	
7.2.1	Introduction	
7.2.2	Requirements	30
7.3	Timing Advance	
7.3.1	Introduction	31
7.3.2	Requirements	31
7.3.2.1	Timing Advance adjustment delay	31
7.3.2.2	Timing Advance adjustment accuracy	31
7.4	Cell phase synchronization accuracy (TDD).	
7.4.1	Definition	
7.4.2	Minimum requirements	
7.5	Synchronization Requirements for E-UTRAN to 1xRTT and HRPD Handovers	
7.5.1	Introduction	
7.5.2	eNodeB Synchronization Requirements	
7.5.2.1		
	Synchronized E-UTRAN	
7.5.2.2	Non-Synchronized E-UTRAN	
7.6	Radio Link Monitoring	
7.6.1	Introduction	
7.6.2	Requirements	
7.6.2.1	Minimum requirement when no DRX is used	
7.6.2.2 7.6.2.3	Minimum requirement when DRX is used Minimum requirement at transitions	33

8	UE Measurements Procedures in RRC_CONNECTED State	35
8.1	General Measurement Requirements	35
8.1.1	Introduction	35
8.1.2	Requirements	35
8.1.2.1	UE measurement capability	35
8.1.2.1	.1 Monitoring of multiple layers using gaps	
8.1.2.2	E-UTRAN intra frequency measurements	
8.1.2.2	E-UTRAN FDD intra frequency measurements	
8.1.2.2	E-UTRAN TDD intra frequency measurements	
8.1.2.3	E-UTRAN inter frequency measurements	42
8.1.2.3	E-UTRAN FDD – FDD inter frequency measurements	42
8.1.2.3	E-UTRAN TDD – TDD inter frequency measurements	45
8.1.2.3	E-UTRAN TDD – FDD inter frequency measurements	
8.1.2.3	E-UTRAN FDD – TDD inter frequency measurements	49
8.1.2.4		
8.1.2.4	E-UTRAN FDD – UTRAN FDD measurements	49
8.1.2.4	E-UTRAN TDD – UTRAN FDD measurements	52
8.1.2.4	E-UTRAN TDD – UTRAN TDD measurements	52
8.1.2.4		
8.1.2.4	E-UTRAN FDD – GSM measurements	54
8.1.2.4		
8.1.2.4	E-UTRAN FDD – UTRAN FDD measurements for SON	59
8.2	Capabilities for Support of Event Triggering and Reporting Criteria	60
8.2.1	Introduction	60
8.2.2	Requirements	60
0	Maccuramenta performance requirements for UE	61
	Measurements performance requirements for UE	
9.1	E-UTRAN measurements	
9.1.2	Intra-frequency RSRP Accuracy Requirements	
9.1.2.1		
9.1.2.2		
9.1.3	Inter-frequency RSRP Accuracy Requirements	
9.1.3.1		
9.1.3.2		
9.1.4 9.1.5	RSRP Measurement Report Mapping	
9.1.5	Intra-frequency RSRQ Accuracy Requirements	
9.1.5.1	Absolute RSRQ Accuracy Inter-frequency RSRQ Accuracy Requirements	04
9.1.6.1		
9.1.6.2		
9.1.0.2		
9.1.7	RSRQ Measurement Report Mapping Power Headroom	
9.1.8.1		
9.1.8.2		
9.1.8.4		
9.2	UTRAN FDD Measurements	
9.2 9.2.1	UTRAN FDD CPICH RSCP	
9.2.1	UTRAN FDD CFICH RSCF	
9.2.2	UTRAN FDD Carler KSS1 UTRAN FDD CPICH Ec/No	
9.2.3 9.3	UTRAN TDD CHCH EC/NO	
9.3.1	UTRAN TDD P-CCPCH RSCP	
9.3.2	UTRAN TDD r-cer en RSer	
9.3.3	Void	
9.3.3 9.4	GSM Measurements	
9.4.1	GSM carrier RSSI	
9. 4 .1 9.5	CDMA2000 1x RTT Measurements	
9.5.1	CDMA2000 1x RTT Pilot Strength	
	Measurements Performance Requirements for E-UTRAN	
10.1	Received Interference Power	
10.1.1	Absolute accuracy requirement	
10.1.2	Relative accuracy requirement	71

ETSI

10.1.3 Received Interference Power measurement report mapping	71
Annex A (normative): Test Cases	
A.1 Purpose of annex	
A.2 Requirement classification for statistical testing	
A.2.1 Types of requirements in TS 36.133	
A.3 RRM test configurations	
A.3.1 Reference Measurement Channels	
A.3.1.1 PDSCH	
A.3.1.1.1 FDD	
A.3.1.1.2 TDD	
A.3.1.2 PCFICH/PDCCH/PHICH	74
A.3.1.2.1 FDD	
A.3.1.2.2 TDD	
A.3.2 OFDMA Channel Noise Generator (OCNG)	
A.3.2.1 OCNG Patterns for FDD	
A.3.2.1.1 OCNG FDD pattern 1: outer resource blocks allocationA.3.2.1.2 OCNG FDD pattern 2: full bandwidth allocation	
A.3.2.2 OCNG PDD pattern 2. Tun bandwidth anocation A.3.2.2 OCNG Patterns for TDD	
A.3.2.2.1 OCNG TDD pattern 1: outer resource blocks allocation	
A.3.2.2.2 OCNG TDD pattern 2: full bandwidth allocation	
•	
A.4 E-UTRAN RRC_IDLE state	
A.4.2 Cell Re-Selection	
A.4.2.1E-UTRAN FDD – FDD Intra frequency caseA.4.2.1.1Test Purpose and Environment	
A.4.2.1.1 Test Purpose and Environment A.4.2.1.2 Test Requirements	
A.4.2.2 E-UTRAN TDD – TDD Intra frequency case	
A.4.2.2.1 Test Purpose and Environment	
A.4.2.2.2 Test Requirements	
A.4.2.3 E-UTRÂN FDD – FDD Inter frequency case	
A.4.2.3.1 Test Purpose and Environment	
A.4.2.3.2 Test Requirements	
A.4.2.4 E-UTRAN FDD – TDD Inter frequency case	
A.4.2.5 E-UTRAN TDD – FDD Inter frequency case	
A.4.2.6 E-UTRAN TDD – TDD: Inter frequency case A.4.2.6.1 Test Purpose and Environment	
A.4.2.6.2 Test Requirements	
A.4.3 E-UTRAN to UTRAN Cell Re-Selection	
A.4.3.1 E-UTRAN FDD – UTRAN FDD:	
A.4.3.2 E-UTRAN FDD – UTRAN TDD:	
A.4.3.3 E-UTRAN TDD – UTRAN FDD:	
A.4.3.4 E-UTRAN TDD – UTRAN TDD:	
A.4.4 E-UTRAN to GSM Cell Re-Selection	
A.4.5.1 E-UTRAN FDD – GSM:	
A.4.5.2 E-UTRAN TDD – GSM:	90
A.5 E-UTRAN RRC CONNECTED Mode Mobility	
A.5.1 E-UTRAN Handover	
A.5.1.1 E-UTRAN FDD - FDD Intra frequency handover	
A.5.1.1.1 Test Purpose and Environment	
A.5.1.1.2 Test Requirements	
A.5.1.2 E-UTRAN TDD - TDD Intra frequency handover	
A.5.1.2.1Test Purpose and EnvironmentA.5.1.2.2Test Requirements	
A.5.1.2 Test Requirements A.5.1.3 E-UTRAN FDD – FDD Inter frequency handover	
A.5.1.3.1 Test Purpose and Environment	
A.5.1.3.2 Test Requirements	
A.5.1.4 E-UTRAN TDD – TDD Inter frequency handover	
A.5.1.4.1 Test Purpose and Environment	
A.5.1.4.2 Test Requirements	

A.6	RRC Connection Control	98
A.7	Timing and Signalling Characteristics	99
A.7.1	UE Transmit Timing	
	-	
A.8	UE Measurements Procedures.	
A.8.1	E-UTRAN FDD Intra-frequency Measurements	99
A.8.1.		00
4.0.1	in asynchronous cells	
A.8.1.		
A.8.1.		100
A.8.1.		100
A.8.1.	in synchronous cells	
A.8.1.	•	
A.8.2	E-UTRAN TDD Intra-frequency Measurements	
A.8.2.		102
11.0.2.	conditions in synchronous cells	102
A.8.2.		
A.8.2.		
A.8.3	E-UTRAN FDD - FDD Inter-frequency Measurements	
A.8.3.		
	conditions in asynchronous cells	104
A.8.3.	•	
A.8.3.	1.2 Test Requirements	106
A.8.4	E-UTRAN TDD - TDD Inter-frequency Measurements	
A.8.4.		
	conditions in synchronous cells	106
A.8.4.	1.1 Test Purpose and Environment	106
A.8.4.	1.2 Test Requirements	108
A.9	Measurement Performance Requirements	100
A.9 A.9.1	RSRP	
A.9.1 A.9.1.		
A.9.1.		
A.9.1.	•	
A.9.1.	F	
A.9.1.	1	
A.9.1.	1 5	
A.9.1.		
A.9.1.	1	
A.9.1.	· · · · · · · · · · · · · · · · · · ·	
A.9.1.	- 1 5	
A.9.1.	1	
A.9.1.		
A.9.1.4		
A.9.1.4		
A.9.1.4	4.2 Test parameters	115
A.9.1.4		
A.9.2	RSRQ	
A.9.2.	1 FDD Intra frequency case	117
A.9.2.	1.1 Test Purpose and Environment	117
A.9.2.	1.2 Test parameters	117
A.9.2.	1	
A.9.2.	1 5	
A.9.2.		
A.9.2.	1	
A.9.2.	1	
A.9.2.		
A.9.2.	1	
A.9.2.	1	
A.9.2.	1	
A.9.2.4	4 TDD—TDD Inter frequency case	123

A.9.2.4.1	Test Purpose	e and Environment	
A.9.2.4.2	Test paramet	eters	
A.9.2.4.3		ements	
Annex B (inf		Change history:	
Annex D (in	or man ve).	Change mstory.	······································
History			

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document specifies requirements for support of Radio Resource Management for the FDD and TDD modes of [Evolved UTRA]. These requirements include requirements on measurements in UTRAN and the UE as well as requirements on node dynamical behaviour and interaction, in terms of delay and response characteristics.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.
- [1] 3GPP TS 36.304: "Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) procedures in idle mode"
- [2] 3GPP TS 36.331: "Evolved Universal Terrestrial Radio Access (E-UTRA); Radio Resource Control (RRC) protocol specification".
- [3] 3GPP TS 36.213: "Evolved Universal Terrestrial Radio Access (E-UTRA); Physical layer procedures"
- [4] 3GPP TS 36.214: "Evolved Universal Terrestrial Radio Access (E-UTRA); Physical layer; Measurements"
- [5] 3GPP TS 36.101: "Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) radio transmission and reception"
- [6] 3GPP TS 25.302: "Services provided by the Physical Layer".
- [7] 3GPP TS 25.331: "RRC Protocol Specification".
- [8] 3GPP TS 45.008: "Radio subsystem link control".
- [9] 3GPP TS 45.005: "Radio transmission and reception".
- [10] 3GPP TS 45.010: "Radio subsystem synchronization".
- [11] 3GPP2 C.S0024-B: 'cdma2000 High Rate Packet Data Air Interface Specification'.
- [12] 3GPP2 C.S0002-D: 'Physical Layer Standard for cdma2000 Spread Spectrum Systems Release A'.
- [13] 3GPP2 C.S0024-B: 'Recommended Minimum Performance Standards for cdma2000 High Rate Packet Data Access Terminal'.
- [14] 3GPP2 C.S0011-C: 'Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Mobile Stations'.
- [15] 3GPP2 C.S0005-D: Upper Layer (Layer 3) Signaling Specification for cdma2000 Spread Spectrum Systems
- [16] 3GPP TS 36.211: "Evolved Universal Terrestrial Radio Access (E-UTRA); Physical Channels and Modulation'

- [17] 3GPP TS 36.321: 'Evolved Universal Terrestrial Radio Access (E-UTRA); Medium Access Control (MAC) protocol specification'.
- [18] 3GPP TS 25.133: "Requirements for Support of Radio Resource Management (FDD)".
- [19] 3GPP TS 25.123: "Requirements for Support of Radio Resource Management (TDD)".
- [20] 3GPP TS 25.214: "Physical layer procedures (FDD)".
- [21] 3GPP TS 36.312: 'Evolved Universal Terrestrial Radio Access (E-UTRA); Multiplexing and channel coding'.
- [22] 3GPP TS 36.302: "Evolved Universal Terrestrial Radio Access (E-UTRA); Services provided by the physical layer"

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in TR 21.905 [x] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in TR 21.905 [x].

3.2 Symbols

For the purposes of the present document, the following symbols apply:

[]	Values included in square bracket must be considered for further studies, because it means that a decision about that value was not taken.
BW _{Channel}	Channel bandwidth, defined in TS 36.101 subclause 3.2
CPICH_Ec	Average energy per PN chip for the CPICH
CPICH_Ec/Io	The ratio of the received energy per PN chip for the CPICH to the total received power
011011_20,10	spectral density at the UE antenna connector.
Ec	Average energy per PN chip.
Ês	Received energy per RE (power normalized to the subcarrier spacing) during the
	useful part of the symbol, i.e. excluding the cyclic prefix, at the UE antenna connector
Іо	The total received power density, including signal and interference, as measured at the
	UE antenna connector.
Ioc	The power spectral density (integrated in a noise bandwidth equal to the chip rate and
	normalized to the chip rate) of a band limited noise source (simulating interference from
	cells, which are not defined in a test procedure) as measured at the UE antenna
	connector.
Iot	The received power spectral density of the total noise and interference for a certain RE
	(power integrated over the RE and normalized to the subcarrier spacing) as measured at
	the UE antenna connector
N_{oc}	The power spectral density of a white noise source (average power per RE normalised
	to the subcarrier spacing), simulating interference from cells that are not defined in a
	test procedure, as measured at the UE antenna connector
S	Defined in TS 36.304, subclause 5.2.3.2 for E-UTRAN
SCH_Ec/Ior	The ratio of the transmit energy per PN chip of the SCH to the total transmit power
	spectral density at the UTRA Node B antenna connector
SCH_RP	Received (linear) average power of the resource elements that carry E-UTRA
	synchronisation signal, measured at the UE antenna connector $S_{ServingCcell}$ Defined in
	TS 36.304
Sintersearch	Defined in TS 25.304, subclause 5.2.6.1.5
Sintrasearch	Defined in TS 25.304, subclause 5.2.6.1.5 for UTRAN and in TS 36.304, subclause
	5.2.4.7 for E-UTRAN
Snonintrasearch	Defined in TS 36.304, subclause 5.2.4.7
SsearchRAT	Defined in TS 25.304, subclause 5.2.6.1.5

Thresh _{x, high}	Defined in TS 36.304, subclause 5.2.4.7
Thresh _{x, low}	Defined in TS 36.304, subclause 5.2.4.7
Thresh _{serving, low}	Defined in TS 36.304, subclause 5.2.4.7
$T_{RE\text{-}ESTABLISH\text{-}REQ}$	The RRC Re-establishment delay requirement, the time between the moment when erroneous CRCs are applied, to when the UE starts to send preambles on the PRACH.
Treselection	Defined in TS 25.304, subclause 5.2.6.1.5
Treselection _{RAT}	Defined in TS 36.304, subclause 5.2.4.7
Treselection _{EUTRAN}	Defined in TS 36.304, subclause 5.2.4.7
Treselection _{UTRAN}	Defined in TS 36.304, subclause 5.2.4.7
Treselection _{GERAN}	Defined in TS 36.304, subclause 5.2.4.7
T _s	Basic time unit, defined in TS 36.211, clause 4

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [x] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [x].

1x RTT AWGN	CDMA2000 1x Radio Transmission Technology Additive White Gaussian Noise
BCCH	Broadcast Control Channel
BCH	Broadcast Channel
CPICH	Common Pilot Channel
CPICH Ec/No	CPICH Received energy per chip divided by the power density in the band
DCCH	Dedicated Control Channel
DL	Downlink
DRX	Discontinuous Reception
DTCH	Dedicated Traffic Channel
eNB	E-UTRAN NodeB
E-UTRA	Evolved UTRA
E-UTRAN	Evolved UTRAN
FDD	Frequency Division Duplex
GERAN	GSM EDGE Radio Access Network
GSM	Global System for Mobile communication
HO	Handover
HRPD	High Rate Packet Data
OCNG	OFDMA Channel Noise Generator
OFDM	Orthogonal Frequency Division Multiplexing
OFDMA	Orthogonal Frequency Division Multiple Access
PBCH	Physical Broadcast Channel
P-CCPCH	Primary Common Control Physical Channel
PCFICH	Physical Control Format Indicator CHannel
PDCCH	Physical Downlink Control CHannel
PDSCH	Physical Downlink Shared CHannel
PHICH	Physical Hybrid-ARQ Indicator CHannel
PLMN	Public Land Mobile Network
PRACH	Physical Random Access CHannel
PUCCH	Physical Uplink Control CHannel
PUSCH	Physical Uplink Shared Channel
RSCP	Received Signal Code Power
RSRP	Reference Signal Received Power
RSRQ	Reference Signal Received Quality
RSSI	Received Signal Strength Indicator
QAM	Quadrature Amplitude Modulation
RACH	Random Access Channel

RAT	Radio Access Technology
RNC	Radio Network Controller
RRC	Radio Resource Control
RRM	Radio Resource Management
SCH	Synchronization Channel
SFN	System Frame Number
SON	Self Optimized Network
TDD	Time Division Duplex
TTI	Transmission Time Interval
UE	User Equipment
UL	Uplink
UMTS	Universal Mobile Telecommunication System
UTRA	Universal Terrestrial Radio Access
UTRAN	Universal Terrestrial Radio Access Network

3.4 Test tolerances

4 E-UTRAN RRC_IDLE state mobility

4.1 Cell Selection

After a UE has switched on and a PLMN has been selected, the Cell selection process takes place, as described in TS36.304. This process allows the UE to select a suitable cell where to camp on in order to access available services. In this process the UE can use stored information (*Stored information cell selection*) or not (*Initial cell selection*).

4.2 Cell Re-selection

4.2.1 Introduction

The cell reselection procedure allows the UE to select a more suitable cell and camp on it.

When the UE is in either *Camped Normally* state or *Camped on Any Cell* state on a cell, the UE shall attempt to detect, synchronise, and monitor intra-frequency, inter-frequency and inter-RAT cells indicated by the serving cell. For intra-frequency and inter-frequency cells the serving cell may not provide explicit neighbour list but carrier frequency information and bandwidth information only. UE measurement activity is also controlled by measurement rules defined in TS36.304, allowing the UE to limit its measurement activity.

4.2.2 Requirements

[Editor"s Note: Requirements for multiple Tx antennas are still FFS. So far only 1Tx antenna case has been considered. The number of Tx antennas and possibly CP length may need to be provided per frequency layer. Details are FFS. Low mobility and high mobility requirements are still FFS]

The UE shall search every layer of higher priority at least every $T_{higher_priority_search} = (60 * N_{layers})$ seconds, where N_{layers} is the total number of configured higher priority E-UTRA, UTRA FDD, UTRA TDD, CDMA2000 1x and HRPD carrier frequencies and is additionally increased by one if GSM is configured as a higher priority.

Editors note: The measurement of cells that are detected in this search is still to be described.

4.2.2.1 Measurement and evaluation of serving cell

The UE shall measure the RSRP level of the serving cell and evaluate the cell selection criterion S defined in [1] for the serving cell at least every DRX cycle.

The UE shall filter the RSRP measurements of the serving cell using at least [2] measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by, at least [DRX cycle/2].

If the UE has evaluated in N_{serv} consecutive DRX cycles that the serving cell does not fulfil the cell selection criterion S, the UE shall initiate the measurements of all neighbour cells indicated by the serving cell, regardless of the measurement rules currently limiting UE measurement activities.

If the UE has not found any new suitable cell based on searches and measurements of the neighbour cells indicated in the measurement control system information for 10 s, the UE shall initiate cell selection procedures for the selected PLMN as defined in [1].

After this 10 s period a UE in RRC_IDLE state is considered to be "out of service area" and shall perform actions according to [1].

DRX cycle length [s]	N _{serv} [number of DRX cycles]
0.32	4
0.64	4
1.28	2
2.56	2

Table 4.2.2.1-1: Nserv

0..

4.2.2.2 Void

4.2.2.3 Measurements of intra-frequency E-UTRAN cells

The UE shall be able to identify new intra-frequency cells and perform RSRP measurements of identified intrafrequency cells without an explicit intra-frequency neighbour list containing physical layer cell identities.

The UE shall be able to evaluate whether a newly detectable intra-frequency cell meets the reselection criteria defined in TS36.304 within $T_{detect,EUTRAN_Intra}$ when that Treselection=0. An intra frequency cell is considered to be detectable if:

- RSRP \geq -TBD dBm and \hat{E} s/Iot > [-3] dB,
- SCH \hat{I} or \geq -TBD dBm and SCH \hat{E} s/Iot > [-3] dB.

The UE shall measure RSRP at least every $T_{measure,EUTRAN_Intra}$ (see table 4.2.2.3-1) for intra-frequency cells that are identified and measured according to the measurement rules.

The UE shall filter RSRP measurements of each measured intra-frequency cell using at least [2] measurements. Within the set of measurements used for the filtering, [at least two measurements] shall be spaced by at least $T_{measure,EUTRAN_Intra}/2$

For an intra-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the intra-frequency cell has met reselection criterion defined [1] within $T_{evaluate,E-UTRAN_{intra}}$ when $T_{reselection} = 0$ as specified in table 4.2.2.3-1.

If $T_{reselection}$ timer has a non zero value and the intra-frequency cell is better ranked than the serving cell, the UE shall evaluate this intra-frequency cell for the $T_{reselection}$ time. If this cell remains better ranked within this duration, then the UE shall reselect that cell.

DRX cycle length [s]	T _{detect,EUTRAN_Intra} [s] (number of DRX cycles)	T _{measure,EUTRAN_Intra} [s] (number of DRX cycles)	T _{evaluate,E-UTRAN_intra} [s] (number of DRX cycles)
0.32	[11.52 (36)]	[1.28 (4)]	[5.12 (16)]
0.64	[17.92 (28)]	[1.28 (2)]	[5.12 (8)]
1.28	[32(25)]	[1.28 (1)]	[6.4 (5)]
2.56	[58.88 (23)]	[2.56 (1)]	[7.68 (3)]

Table 4.2.2.3-1 : T_{detect,EUTRAN_Intra}, T_{measure,EUTRAN_Intra} and T_{evaluate, E-UTRAN_intra}

4.2.2.4 Measurements of inter-frequency E-UTRAN cells

The UE shall be able to identify new inter-frequency cells and perform RSRP measurements of identified interfrequency cells if carrier frequency information is provided by the serving cell, even if no explicit neighbour list with physical layer cell identities is provided.

If the S_{ServingCell}of the E-UTRA serving cell (or other cells on the same frequency layer) is greater than S_{nonintrasearch} then

- the UE may not search for, or measure inter-frequency or inter-RAT layers of equal or lower priority.
- the UE shall search for inter-frequency layers of higher priority at least every T_{higher_priority_search} where T_{higher_priority_search} is described in section 4.2.2.

If the $S_{ServingCell}$ of the E-UTRA serving cell is less than or equal to $S_{nonintrasearch}$ then the UE shall search for and measure inter-frequency layers of higher, equal or lower priority in preparation for possible reselection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority layers is not reduced and shall be the same as that defined below for a lower or equal priority interfrequency layers.

The UE shall be able to evaluate whether a newly detectable lower or equal priority inter-frequency cell meets the reselection criteria defined in TS36.304 within $K_{carrier} * T_{detect,EUTRAN_Inter}$ if at least carrier frequency information is provided for inter-frequency neighbour cells by the serving cells when $T_{reselection} = 0$. The parameter $K_{carrier}$ is the number of E-UTRA inter-frequency carriers indicated by the serving cell. An inter-frequency cell is considered to be detectable if:

- RSRP \geq -TBD dBm and \hat{E} s/Iot > [-3] dB,
- SCH_RP > -TBD dBm and SCH $\hat{E}s/Iot > [-3] dB$.

When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{measure,E}$. $UTRAN_Inter$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this section shall still be met by the UE before it makes any determination that it may stop measuring the cell. If the UE detects on a E-UTRA carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall measure RSRP at least every $K_{carrier} * T_{measure,EUTRAN_Inter}$ (see table 4.2.2.3-1) for identified lower or equal priority inter-frequency cells. If the UE detects on a E-UTRA carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall filter RSRP measurements of each measured higher, lower and equal priority inter-frequency cell using at least [2] measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $[T_{measure,EUTRAN_Inter}/2]$.

The UE shall not consider a E-UTRA neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an inter-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the inter-frequency cell has met reselection criterion defined TS 36.304 within $K_{carrier} * T_{evaluate,E-UTRAN_Inter}$ when $T_{reselection} = 0$ as specified in table 4.2.2.4-1.

If $T_{reselection}$ timer has a non zero value and the inter-frequency cell is better ranked than the serving cell, the UE shall evaluate this inter-frequency cell for the $T_{reselection}$ time. If this cell remains better ranked within this duration, then the UE shall reselect that cell.

DRX cycle length [s]	T _{detect,EUTRAN_Inter} [s] (number of DRX cycles)	T _{measure,EUTRAN_Inter} [s] (number of DRX cycles)	T _{evaluate,E} - UTRAN_Inter [s] (number of DRX cycles)
0.32	[11.52 (36)]	[1.28 (4)]	[5.12 (16)]
0.64	[17.92 (28)]	[1.28 (2)]	[5.12 (8)]
1.28	[32(25)]	[1.28 (1)]	[6.4 (5)]
2.56	[58.88 (23)]	[2.56 (1)]	[7.68 (3)]

Table 4.2.2.4-1 : $T_{detect,EUTRAN_Inter}$, $T_{measure,EUTRAN_Inter}$ and $T_{evaluate,E-UTRAN_Inter}$

4.2.2.5 Measurements of inter-RAT cells

If the S_{ServingCell} of the E-UTRA serving cell (or other cells on the same frequency layer) is greater than S_{nonintrasearch} then

- the UE may not search for, or measure inter-RAT layers of equal or lower priority.
- the UE shall search for inter-RAT layers of higher priority at least every T_{higher_priority_search} where T_{higher_priority_search} is described in section 4.2.2.

If the $S_{\text{ServingCell}}$ of the E-UTRA serving cell is less than or equal to $S_{\text{nonintrasearch}}$ then the UE shall search for and measure inter-RAT layers of higher, equal or lower priority in preparation for possible reselection. In this scenario, the minimum rate at which the UE is required to search for and measure such layers is not reduced and shall be the same as that defined below for lower priority RATs.

4.2.2.5.1 Measurements of UTRAN FDD cells

When the measurement rules indicate that UTRA FDD cells are to be measured, the UE shall measure CPICH Ec/Io and CPICH RSCP of detected UTRA FDD cells in the neighbour cell list at the minimum measurement rate specified in this section. The parameter $N_{UTRA_carrier}$ is the number of carriers used for all UTRA FDD cells in the neighbour cell list. The UE shall filter CPICH Ec/Io and CPICH RSCP measurements of each measured UTRA FDD cell using at least [2] measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least half the minimum specified measurement period.

The UE shall evaluate whether newly detectable UTRA FDD cells have met the reselection criteria in TS 36.304 within time ($N_{UTRA_carrier}$) * $T_{detectUTRA_FDD}$ except when UTRA FDD is of higher priority than the currently selected E-UTRAN frequency layer and the $S_{servingCell}$ of the E-UTRA serving cell (or other cells on the same frequency layer) is greater than $S_{nonintrasearch}$ when Treselection_{RAT} = 0.

Cells which have been detected shall be measured at least every $(N_{UTRA_carrier}) * T_{measureUTRA_FDD}$ except when UTRA FDD is of or higher priority than the currently selected E-UTRAN frequency layer and the $S_{ServingCell}$ of the E-UTRA serving cell (or other cells on the same frequency layer) is greater than $S_{nonintrasearch}$.

When higher priority UTRA FDD cells are found by the higher priority search, they shall be measured at least every $T_{measure,UTRA_FDD}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this section shall still be met by the UE before it makes any determination that it may stop measuring the cell.

For a cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that an already identified UTRA FDD cell has met reselection criterion defined in 3GPP TS 36.304 [1] within (N_{UTRA_carrier}) * T_{evaluateUTRA_FDD} when T_{reselection} = 0 as specified in table 4.2.2.5.1-1.

DRX cycle length [s]	T _{detect} UTRA_FDD [S]	T _{measureUTRA_FDD} [s] (number of DRX cycles)	T _{evaluateUTRA_FDD} [s] (number DRX cycles)	of
0.32		5.12 (16)	15.36 (48)	
0.64	30	5.12 (8)	15.36 (24)	
1.28		6.4(5)	19.2 (15)	
2.56	60	7.68 (3)	23.04 (9)	

Table 4.2.2.5.1-1: $T_{detectUTRA_FDD}$, $T_{measureUTRA_FDD}$, and $T_{evaluateUTRA_FDD}$

4.2.2.5.2 Measurements of UTRAN TDD cells

When the measurement rules indicate that UTRA TDD cells are to be measured, the UE shall measure P-CCPCH RSCP of detected UTRA TDD cells in the neighbour cell list at the minimum measurement rate specified in this section. The parameter $N_{UTRA_carrier_TDD}$ is the number of carriers used for all UTRA TDD cells in the neighbour cell list. The UE shall filter P-CCPCH RSCP measurements of each measured UTRA TDD cell using at least [2] measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least half the minimum specified measurement period. P-CCPCH RSCP of UTRAN TDD cells shall not be filtered over a longer period than that specified in table 4.2.2.5.2-1.

The UE shall evaluate whether newly detectable UTRA TDD cells have met the reselection criteria in TS 36.304 within time $(N_{UTRA_carrier_TDD}) * T_{detectUTRA_TDD}$ except when UTRA TDD is of equal to, or higher priority than the currently selected E-UTRAN frequency layer and the S_{ServingCell} of the E-UTRA serving cell (or other cells on the same frequency layer) is greater than S_{nonintrasearch} when T_{reselection} = 0.

Cells which have been detected shall be measured at least every $(N_{UTRA_carrier_TDD}) * T_{measureUTRA_TDD}$ except when UTRA TDD is of higher priority than the currently selected E-UTRAN frequency layer and the $S_{ServingCell}$ of the E-UTRA serving cell (or other cells on the same frequency layer) is greater than $S_{nonintrasearch}$.

When higher priority UTRA TDD cells are found by the higher priority search, they shall be measured at least every $T_{measure,UTRA_TDD}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this section shall still be met by the UE before it makes any determination that it may stop measuring the cell.

For a cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the UTRA TDD cell has met reselection criterion defined in [1] within $N_{UTRA_carrier_TDD}$ * $T_{evaluateUTRA_TDD}$ when $T_{reselection} = 0$ as specified in table 4.2.2.5.2-1.

For non-identified UTRA TDD cells, the filtering shall be such that the UE shall be capable of evaluating that a non-identified a UTRA TDD cell has met reselection criterion defined in 3GPP TS 36.304 [1] within $T_{detectUTRA_TDD} = [60]$ seconds from the moment the UTRA TDD cell has met the reselection criterion.

DRX cycle length [s]	T _{measureUTRA_TDD} [s] (number of DRX cycles)	T _{evaluate} UTRA_TDD
0.32	5.12 (16)	15.36 (48)
0.64	5.12 (8)	15.36 (24)
1.28	6.4 (5)	19.2 (15)
2.56	7.68 (3)	23.04 (9)

Table 4.2.2.5.2-1: T_{measureUTRA_TDD} and T_{evaluateUTRA_TDD}

4.2.2.5.3 Measurements of GSM cells

If the $S_{ServingCell}$ of the E-UTRA serving cell is greater than $S_{nonintrasearch}$ then

- the UE may not search for, or measure GSM cells if the priority of GSM is lower than the serving cell.
- the UE shall search for and measure GSM cells if the priority of GSM is higher than the serving cell. The minimum rate at which the UE is required to search for and measure such layers may be reduced in this scenario to maintain UE battery life.

If the $S_{\text{ServingCell}}$ of the E-UTRA serving cell is less than or equal to $S_{\text{nonintrasearch}}$ then the UE shall measure, according to the measurement rules defined in [1], at least every $T_{\text{measure,GSM}}$ (see table 4.2.2.5.3-1):

- if a detailed neighbour cell list is provided, the signal level of the GSM BCCH carrier of each GSM neighbour cell indicated in the measurement control system information of the serving cell; or
- if only BCCH carriers are provided, the signal level of the GSM BCCH carriers indicated in the measurement control system information of the serving cell.

Note : If it is concluded that only blacklist, or only whitelist can be used for reselection to GSM then one of these bullets can be deleted.

If the RSRP of the E-UTRA serving cell is greater than $\text{Thresh}_{\text{serving}_high,x}$ then the UE shall search for GSM BCCH carrier at least every $\text{T}_{\text{higher}_priority_search}$ where $\text{T}_{\text{higher}_priority_search}$ is described in section 4.2.2. When higher priority GSM BCCH carriers are found by the higher priority search, they shall be measured at least every $\text{T}_{\text{measure},GSM}$, and the UE shall decode the BSIC of the GSM BCCH carrier. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection, or to continuously verify the BSIC of the GSM BCCH carrier every 30s. However, the minimum measurement filtering requirements specified later in this section shall still be met by the UE before it makes any determination that it may stop measuring the cell.

The UE shall maintain a running average of 4 measurements for each GSM BCCH carrier. The measurement samples for each cell shall be as far as possible uniformly distributed over the averaging period.

If continuous GSM measurements are required by the measurement rules in [1], the UE shall attempt to verify the BSIC at least every 30 seconds for each of the 4 strongest GSM BCCH carriers. If a change of BSIC is detected for one GSM cell then that GSM BCCH carrier shall be treated as a new GSM neighbour cell. If the UE detects on a BCCH carrier a BSIC which is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform BSIC re-confirmation for that cell.

The UE shall not consider the GSM BCCH carrier in cell reselection, if the UE cannot demodulate the BSIC of that GSM BCCH carrier. Additionally, the UE shall not consider a GSM neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

DRX	T _{measure,GSM}	
cycle	[s] (number	
length	of DRX	
[s]	cycles)	
0.32	[5.12 (16)]	
0.64	[5.12 (8)]	
1.28	[6.4(5)]	
2.56	[7.68 (3)]	

Table 4.2.2.5.3-1: T_{detect,GSM}, T_{measure,GSM},

4.2.2.5.4 Measurements of HRPD cells

In order to perform measurement and cell reselection to HRPD cell, the UE shall acquire the timing of HRPD cells.

When the measurement rules indicate that HRPD cells are to be measured, the UE shall measure CDMA2000 HRPD Pilot Strength of HRPD cells in the neighbour cell list at the minimum measurement rate specified in this section.

The parameter "Number of HRPD Neighbor Frequency", which is transmitted on E-UTRAN BCCH, is the number of carriers used for all HRPD cells in the neighbour cell list.

When the RSRP of the E-UTRA serving cell (or other cells on the same frequency layer) is lower than "HRPD Start Measuring E-UTRAN Rx Power Strength Threshold" and HRPD is of lower priority than the currently selected E-UTRAN frequency layer, the UE shall measure CDMA2000 HRPD Pilot Strength of the HRPD cells at least every (Number of HRPD Neighbor Frequency)*T_{measureHRPD}. In case HRPD is of higher priority than the currently selected E-UTRAN frequency layer the UE shall measure HRPD cells at least every (Number of HRPD Neighbor Frequency)*T_{measureHRPD} cells at least every (Number of HRPD Neighbor Frequency)* T_{higher_proirty_search}. The parameter T_{higher_proirty_search} is defined in section 4.2.2.

The UE shall be capable of evaluating that the HRPD cell has met cell reselection criterion defined in [1] within $T_{evaluateHRPD}$.

Table 4.2.2.5.4-1 gives values of $T_{measureHRPD}$ and $T_{evaluateHRPD}$.

DRX cycle length [s]	T _{measureHRPD} [s] (number of DRX cycles)	T _{evaluateHRPD} [s] (number of DRX cycles)
0.32	5.12 (16)	15.36 (48)
0.64	5.12 (8)	15.36 (24)
1.28	6.4 (5)	19.2 (15)
2.56	7.68 (3)	23.04 (9)

Table 4.2.2.5.4-1:	T _{measureHRPD and}	F evaluateHRPD
--------------------	------------------------------	-----------------------

4.2.2.5.5 Measurements of cdma2000 1X

In order to perform measurement and cell reselection to cdma2000 1X cell, the UE shall acquire the timing of cdma2000 1X cells.

When the measurement rules indicate that cdma2000 1X cells are to be measured, the UE shall measure cdma2000 1x RTT Pilot Strength of cdma2000 1X cells in the neighbour cell list at the minimum measurement rate specified in this section.

The parameter "Number of CDMA2000 1X Neighbor Frequency", which is transmitted on E-UTRAN BCCH, is the number of carriers used for all cdma2000 1X cells in the neighbour cell list.

When the RSRP of the E-UTRA serving cell (or other cells on the same frequency layer) is lower than "CDMA2000 1X Start Measuring E-UTRAN Rx Power Strength Threshold" and cdma2000 1X is of lower priority than the currently selected E-UTRAN frequency layer, the UE shall measure Pilot Ec/Io of the CDMA2000 1X cells at least every (Number of CDMA2000 1X Neighbor Frequency)*T_{measureCDMA2000_1X}. In case cdma2000 1X is of higher priority than the currently selected E-UTRAN frequency layer, the UE shall measure cdma2000 1X cells at least every (Number of CDMA2000 1X Neighbor Frequency) and the currently selected E-UTRAN frequency layer, the UE shall measure cdma2000 1X cells at least every (Number of CDMA2000 1X Neighbor Frequency)* T_{higher_proirty_search}. The parameter T_{higher_proirty_search} is defined in section 4.2.2.

The UE shall be capable of evaluating that the cdma2000 1X cell has met cell reselection criterion defined in [1] within $T_{evaluateCDMA2000_{1}X}$.

Table 4.2.2.5.5-1 gives values of T_{measureCDMA2000_1X} and T_{evaluateCDMA2000_1X}.

DRX cycle length [s]	T _{measureCDMA2000_1X} [s] (number of DRX cycles)	T _{evaluateCDMA2000_1X} [s] (number of DRX cycles)
0.32	5.12 (16)	15.36 (48)
0.64	5.12 (8)	15.36 (24)
1.28	6.4 (5)	19.2 (15)
2.56	7.68 (3)	23.04 (9)

Table 4.2.2.5.5-1: TmeasureCDMA2000 1X and TevaluateCDMA2000 1X

4.2.2.6 Evaluation of cell re-selection criteria

The UE shall evaluate the intra-frequency, inter-frequency and inter-RAT cell reselection criteria defined in [1] at least every DRX cycle.

4.2.2.7 Maximum interruption in paging reception

UE shall perform the cell re-selection with minimum interruption in monitoring downlink channels for paging reception.

At intra-frequency and inter-frequency cell re-selection, the UE shall monitor the downlink of serving cell for paging reception until the UE is capable to start monitoring downlink channels of the target intra-frequency cell for paging reception. The interruption time shall not exceed $T_{SI-EUTRA} + 50$ ms.

At inter-RAT cell re-selection, the UE shall monitor the downlink of serving cell for paging reception until the UE is capable to start monitoring downlink channels for paging reception of the target inter-frequency cell. For E-UTRAN to UTRA cell re-selection the interruption time must not exceed $T_{SI-UTRA} + 50$ ms. For E-UTRAN to GSM cell re-selection the interruption time must not exceed $T_{BCCH} + 50$ ms.

 $T_{SI-EUTRA}$ is the time required for receiving all the relevant system information data according to the reception procedure and the RRC procedure delay of system information blocks defined in [2] for a E-UTRAN cell.

 $T_{SI-UTRA}$ is the time required for receiving all the relevant system information data according to the reception procedure and the RRC procedure delay of system information blocks defined in [7] for a UTRAN cell.

T_{BCCH} is the maximum time allowed to read BCCH data from a GSM cell defined in [8].

These requirements assume sufficient radio conditions, so that decoding of system information can be made without errors and does not take into account cell re-selection failure.

At cell re-selection to HRPD, the UE shall monitor the downlink of serving cell for paging reception until the UE is capable of starting to monitor downlink channels for paging reception of the target HRPD cell. For HRPD cell reselection the interruption time must not exceed $T_{SI-HRPD} + 50$ ms.

 $T_{SI-HRPD}$ is the time required for receiving all the relevant system information data according to the reception procedure and the upper layer (Layer 3) procedure delay of system information blocks defined in [15] in for HRPD cell.

At cell re-selection to cdma2000 1X, the UE shall monitor the downlink of serving cell for paging reception until the UE is capable of starting to monitor downlink channels for paging reception of the target cdma2000 1X cell. For cdma2000 1X cell re-selection the interruption time must not exceed $T_{SI-cdma2000_1X} + 50$ ms.

 $T_{SI-cdma2000_1X}$ is the time required for receiving all the relevant system information data according to the reception procedure and the upper layer (Layer 3) procedure delay of system information blocks defined in [15] for cdma2000 1X cell.

4.2.2.8 void

5 E-UTRAN RRC_CONNECTED state mobility

- 5.1 E-UTRAN Handover
- 5.1.1 Introduction
- 5.1.2 Requirements
- 5.1.2.1 E-UTRAN FDD FDD

The requirements in this section are applicable to both intra-frequency and inter-frequency handovers.

3GPP TS 36.133 version 8.4.0 Release 8

21

5.1.2.1.1 Handover delay

Procedure delays for all procedures that can command a handover are specified in [2].

When the UE receives a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ seconds from the end of the last TTI containing the RRC command.

Where:

 $D_{handover}$ equals the maximum RRC procedure delay to be defined in section 11.2 in 3GPP TS 36.331 [2] plus the interruption time stated in section 5.1.2.1.2.

5.1.2.1.2 Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay. This requirement applies when UE is not required to perform any synchronisation procedure before transmitting on the new PRACH.

When intra-frequency or inter-frequency handover is commanded, the interruption time shall be less than Tinterrupt

$$T_{interrupt} = T_{search} + T_{IU} + 20 ms$$

Where:

 T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then $T_{search} = 0$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

 T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to 30 ms.

NOTE: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in Section 8.1.2.2.1 for intra-frequency handover and Section 8.1.2.3.1 for inter-frequency handover.

5.2.2.2 E-UTRAN FDD – TDD

The requirements in this section are applicable to handover from FDD to TDD. The requirements in this section shall apply to UE supporting FDD and TDD.

The requirements in section 5.2.2.4 apply for this section.

5.2.2.2.1	(Void)
-----------	--------

5.2.2.2.2 (Void)

5.2.2.3 E-UTRAN TDD – FDD

The requirements in this section are applicable to handover from TDD to FDD. The requirements in this section shall apply to UE supporting FDD and TDD.

The requirements in section 5.1.2.1 apply for this section.

oid)

5.2.2.3.2 (Void)

5.2.2.4 E-UTRAN TDD – TDD

The requirements in this section are applicable to both intra-frequency and inter-frequency handovers.

5.2.2.4.1 Handover delay

Procedure delays for all procedures that can command a handover are specified in 3GPP TS 36.331 [2].

When the UE receives a RRC message implying handover, the UE shall be ready to start the transmission of the new uplink UpPTS or PRACH channel within $D_{handover}$ seconds from the end of the last TTI containing the RRC command.

Where:

 $D_{handover}$ equals the maximum RRC procedure delay to be defined in section 11.2 in 3GPP TS36.331 [2] plus the interruption time stated in section 5.1.2.4.2.

5.2.2.4.2 Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new UpPTS or PRACH, excluding the RRC procedure delay. This requirement applies when UE is not required to perform any synchronisation procedure before transmitting on the new UpPTS or PRACH.

When intra-frequency or inter-frequency handover is commanded, the interruption time shall be less than Tinterrupt

$$T_{interrupt} = T_{search} + T_{IU} + 20 \text{ ms}$$

Where

 T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then $T_{search} = 0$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

 T_{IU} is the interruption uncertainty in acquiring the first available UpPTS or PRACH occasion in the new cell. T_{IU} can be up to 30 ms.

NOTE: The actual value of T_{IU} shall depend upon the UpPTS or PRACH configuration used in the target cell.

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in Section 8.1.2.2.2 for intra-frequency handover and Section 8.1.2.3.4 for inter-frequency handover.

5.3 Handover to other RATs

5.3.1 E-UTRAN - UTRAN FDD Handover

5.3.1.1 Introduction

Editor"s note: The hard handover procedure is assumed to be initiated by E-UTRAN by sending a MOBILITY FROM E-UTRA RRC command.

5.3.1.1.1 Handover delay

Procedure delay is specified in section 11.2 in 3GPP TS36.331 [2].

When the UE receives a RRC message implying handover to UTRAN with the activation time "now" or earlier than RRC procedure delay seconds from the end of the last E-UTRAN TTI containing the RRC command, the UE shall be ready to start the transmission of the new UTRA uplink DPCCH within D_{handover} seconds from the end of the last E-UTRAN TTI containing the RRC MOBILITY FROM E-UTRA command.

[Editor"s note: An accurate definition for the concept of "activation time" is still needed]

If the access is delayed to an indicated activation time later than E-UTRAN RRC procedure delay seconds from the end of the last TTI containing the E-UTRAN RRC command, the UE shall be ready to start the transmission of the new uplink DPCCH at the designated activation time + interruption time.

where:

- D_{handover} equals the RRC procedure delay defined in section 11.2 in 3GPP TS 36.331 [2] plus the interruption time stated in section 5.3.1.1.2.

5.3.1.1.2 Interruption time

The interruption time, i.e. the time between the last TTI containing a transport block on the E-UTRAN PDSCCH and the time the UE starts transmission of the new uplink DPCCH depends on whether the target cell is known for the UE or not. The target cell is known if it has been measured by the UE during the last 5 seconds otherwise it is unknown. The UE shall always perform a UTRA synchronisation procedure as part of the handover procedure.

If the target cell is known the interruption time shall be less than Tinterrupt1

$$T_{interrupt1} = T_{IU} + T_{sync} + 50 + 10 * F_{max} ms$$

If the target cell is unknown the interruption time shall be less than Tinterrupt2

$$T_{interrupt2} = T_{IU} + T_{sync} + 150 + 10 * F_{max} ms$$

This requirement shall be met, provided that there is one target cell in the MOBILITY FROM E-UTRA command. Performance requirements for E-UTRA to UTRA soft handover are not specified. When UE is connected to an E-UTRA cell, UTRA SFN timing measurements are not reported. This implies that the timing of the DPCH of the UTRA target cells in the active set cannot be configured by UTRAN to guarantee that all target cells fall within the UE reception window of T_0 +/- 148 chips.

Where:

T_{IU}	is the interruption uncertainty when changing the timing from the E-UTRAN to the new UTRAN cell. T_{IU} can be up to one UTRA frame (10 ms).
F _{max}	denotes the maximum number of radio frames within the transmission time intervals of all transport channels that are multiplexed into the same CCTrCH on the UTRA target cell.
T _{sync}	is the time required for measuring the downlink DPCCH channel as stated in 3GPP TS 25.214 section 4.3.1.2 [20]. In case higher layers indicate the usage of a post-verification period $T_{sync}=0$ ms. Otherwise $T_{sync}=40$ ms.

The phase reference is the primary CPICH.

The requirements in this section assume that N312 has the smallest possible value i.e. only one insync is required.

5.3.2 E-UTRAN - UTRAN TDD Handover

5.3.2.1 Introduction

The purpose of inter-RAT handover from E-UTRAN to UTRAN TDD is to change the radio access mode from E-UTRAN to UTRAN TDD. The handover procedure is initiated from E-UTRAN with a RRC message that implies a hard handover as described in [2].

5.3.2.2 Requirements

The requirements in this section shall apply to UE supporting E-UTRAN and UTRAN TDD.

5.3.2.2.1 Handover delay

RRC procedure performance values for all RRC procedures that can command a hard handover are specified in [2].

When the UE receives a RRC message implying E-UTRAN/UTRAN TDD handover with the activation time "now" or earlier than RRC procedure delay seconds from the end of the last TTI containing the RRC command, the UE shall be ready to start the transmission of the new uplink DPCH or the SYNC-UL within D_{handover} seconds from the end of the last TTI containing the RRC MOBILITY FROM E-UTRA command.

If the access is delayed to an indicated activation time later than RRC procedure delay seconds from the end of the last TTI containing the RRC command, the UE shall be ready to start the transmission of the new uplink DPCH at the designated activation time + interruption time.

Where:

- D_{handover} equals the RRC procedure performance value as defined in [2] plus the interruption time stated in section 5.3.2.2.

5.3.2.2.2 Interruption time

The interruption time, i.e. the time between the end of the last TTI containing a transport block on the E-UTRAN PDCCH and the time the UE starts transmission of the new uplink DPCH or the SYNC-UL, is dependent on whether the target cell is known for the UE or not. The UE shall always perform a UTRA synchronisation procedure as part of the handover procedure.

If the target cell has been measured by the UE during the last 5 seconds, the interruption time shall be less than Tinterrupt1

$$\Gamma_{\text{interrupt1}} = T_{\text{offset}} + T_{\text{UL}} + 30*F_{\text{SFN}} + [20] + 10*F_{\text{max}} \text{ ms}$$

If the target cell has not been measured by the UE during the last 5 seconds, the interruption time shall be less than $T_{interrupt2}$

$$\Gamma_{\text{interrupt2}} = T_{\text{offset}} + T_{\text{UL}} + 30 * F_{\text{SFN}} + [180] + 10 * F_{\text{max}} \text{ ms}$$

Where:

T _{offset}	Equal to 10 ms, the frame timing uncertainty between the old cell and the target cell and the time that can elapse until the appearance of a Beacon channel
T _{UL}	Equal to 10 ms, the time that can elapse until the appearance of the UL timeslot in the target cell
F _{SFN}	Equal to 1 if SFN decoding is required and equal to 0 otherwise
F _{max}	denotes the maximum number of radio frames within the transmission time intervals of all transport channels that are multiplexed into the same CCTrCH.

The interruption time requirements for an unknown target cell shall apply only if the signal quality of the unknown target cell is sufficient for successful synchronisation with one attempt.

5.3.3 E-UTRAN - GSM Handover

5.3.3.1 Introduction

The purpose of inter-RAT handover from E-UTRAN to GSM is to transfer a connection between the UE and E-UTRAN to GSM. The handover procedure is initiated from E-UTRAN with a RRC message (MOBILITY FROM E-UTRA). The procedure is described in in 3GPP TS 36.331 [2].

5.3.3.2 Requirements

The requirements in this section shall apply to UE supporting E-UTRAN and GSM.

The requirements given below in Tables 5.3.3.2.1-1 and 5.3.3.2.2-1 for the case where the UE has not synchronised to the GSM cell before receiving the RRC MOBILITY FROM E-UTRA command are valid when the signal quality of the GSM cell is sufficient for successful synchronisation with one attempt. If the UE is unable to synchronise to the GSM cell on the first attempt, it shall continue to search for synchronisation information for up to 800 ms duration. If after 800 ms the UE has not synchronised to the GSM cell it shall follow the handover failure procedure specified in [2].

5.3.3.2.1 Handover delay

When the UE receives a RRC MOBILITY FROM E-UTRA command with the activation time "now" or earlier than RRC procedure delay (see below) from the end of the last TTI containing the RRC command, the UE shall be ready to transmit (as specified in [10]) on the channel of the new RAT within the value in table 5.3.3.2.1-1 from the end of the last TTI containing the RRC command.

If the access is delayed to an indicated activation time later than RRC procedure delay from the end of the last TTI containing the RRC command, the UE shall be ready to transmit (as specified in [10]) on the channel of the new RAT at the designated activation time + interruption time.

The UE shall process the RRC procedures for the MOBILITY FROM E-UTRA command within 50 ms, which is noted as RRC procedure delay. If the activation time is used, it corresponds to the CFN of the E-UTRAN channel.

Table 5.3.3.2.1-1: E-UTRAN/GSM handover - handover delay

UE synchronisation status	handover delay [ms]
The UE has synchronised to the GSM cell before the	90
RRC MOBILITY FROM E-UTRA COMMAND is received	
The UE has not synchronised to the GSM cell before	190
the RRC MOBILITY FROM E-UTRA COMMAND is	
received	

5.3.3.2.2 Interruption time

The interruption time, i.e. the time between the end of the last TTI containing a transport block on the old channel and the time the UE is ready to transmit on the new channel, shall be less than the value in table 5.3.3.2.2-1.

Table 5.3.3.2.2-1: E-UTRAN/GSM handover - interruption time

Synchronisation status	Interruption time [ms]
The UE has synchronised to the GSM cell before the	40
RRC MOBILITY FROM E-UTRA COMMAND is received	
The UE has not synchronised to the GSM cell before	140
the RRC MOBILITY FROM E-UTRA COMMAND is	
received	

5.4 Handover to Non-3GPP RATs

5.4.1 E-UTRAN – HRPD Handover

5.4.1.1 Introduction

The handover procedure from E-UTRAN to HRPD is initiated when E-UTRAN sends handover command to the UE through dedicated RRC signalling.

5.4.1.1.1 Handover delay

The handover delay $(D_{handover})$ is defined as the sum of the RRC procedure delay, which is defined in [2] in section [TBD] and the interruption time specified in section 5.4.1.1.2.

When the UE receives a RRC message implying handover to HRPD, the UE shall be ready to start the transmission of the new reverse control channel in HRPD within $D_{handover}$ from the end of the last E-UTRAN TTI containing the RRC command.

5.4.1.1.2 Interruption time

The interruption time, i.e. the time between the last TTI containing a transport block on the E-UTRAN PDSCH and the time the UE starts transmission of the reverse control channel in HRPD depends on whether the target cell is known to the UE or not.

An HRPD cell is known if it has been measured by the UE during the last 5 seconds otherwise it is unknown. Under the reference conditions specified in sub-clause 6.6 of [13], the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{IU} + [40] + [10] * KC * SW_K + [10] * OC * SW_O ms$$

Where:

- T_{IU} It is the interruption uncertainty when changing the timing from the E-UTRAN to the new HRPD cell. T_{IU} can be up to one HRPD frame (26.66 ms).
- SW_K is SW_K = $\left[\frac{\text{srch}_win_k}{60}\right]$ where srch_win_k is the number of HRPD chips indicated by the

search window for known target HRPD cells in the message

SW₀ is SW₀ = $\left[\frac{\text{srch}_win_o}{60}\right]$ where srch_win_o is the number of HRPD chips indicated by the search window for unknown target HRPD cells in the message

KC It is the number of known target HRPD cells in the message, and

OC It is the number of unknown target HRPD cells in the message.

Note: An additional delay in the interruption time may occur due to the reverse link silence interval [11], which is specific to HRPD.

5.4.2 E-UTRAN – cdma2000 1X Handover

5.4.2.1 Introduction

The handover procedure from E-UTRAN to cdma2000 1X is initiated when E-UTRAN sends handover command to the UE through dedicated RRC signalling.

5.4.2.1.1 Handover delay

The handover delay $(D_{handover})$ is defined as the sum of the RRC procedure delay, which is defined in [2] in section [TBD] and the interruption time specified in section 5.4.2.1.2.

When the UE receives a RRC message implying handover to cdma2000 1X, the UE shall be ready to start the transmission of the new reverse control channel in cdma2000 1X within $D_{handover}$ from the end of the last E-UTRAN TTI containing the RRC command.

5.4.2.1.2 Interruption time

The interruption time, i.e. the time between the last TTI containing a transport block on the E-UTRAN PDSCH and the time the UE starts transmission of the reverse control channel in cdma2000 1X depends on whether the target cell is known to the UE or not.

A cdma2000 1X cell is known if it has been measured by the UE during the last 5 seconds otherwise it is unknown. Under the reference conditions specified in sub-clause 4.2.1 of [14], the interruption time shall be less than $T_{interrupt}$:

$$T_{interrupt} = T_{IU} + [40] + [10] * KC * SW_K + [10] * OC * SW_O ms$$

Where:

$$T_{IU}$$
It is the interruption uncertainty when changing the timing from the E-UTRAN to the new
cdma2000 1X cell. T_{IU} can be up to one cdma2000 1X frame (20 ms). SW_K is $SW_K = \left[\frac{\text{srch}_win}{60}\right]$ where srch_win_k is the number of cdma2000 1x chips indicated by
the search window for known target cdma2000 1x cells in the message SW_O is $SW_O = \left[\frac{\text{srch}_win}{60}\right]$ where srch_win_o is the number of cdma2000 1x chips indicated by
the search window for unknown target cdma2000 1x cells in the message SW_O is $SW_O = \left[\frac{\text{srch}_win}{60}\right]$ where srch_win_o is the number of cdma2000 1x chips indicated by
the search window for unknown target cdma2000 1x cells in the messageKCIt is the number of known target cdma2000 1X cells in the message, and
OCOCIt is the number of unknown target cdma2000 1X cells in the message.

6 RRC Connection Mobility Control

6.1 RRC Re-establishment

The requirements in this section are applicable to both E-UTRAN FDD and TDD.

6.1.1 Introduction

RRC connection re-establishment is initiated when a UE in RRC connected mode looses RRC connection due to any of these reasons: radio link failure, handover failure or radio link problem. The RRC es-tablishment procedure is specified in section 5.3.7 in TS 36.331 [2].

6.1.2 Requirements

In RRC connected mode the UE shall be capable of sending *RRCConnectionReestablishmentRequest* message within $T_{re-establish_delay}$ seconds from the moment it detects a loss in RRC connection. The total RRC connection delay ($T_{re-establish_delay}$) shall be less than:

 $T_{re-establish_delay} = T_{RRC_re-establish_procedure_delay} + T_{UL_grant} + T_{UE_re-establish_delay}$

 $T_{RRC_re-establish_procedure_delay}$: It is the RRC procedure delay as specified in TS 36.331 [2].

 T_{UL_grant} : It is the time required to acquire and process uplink grant from the target cell. The uplink grant is required to transmit *RRCConnectionReestablishmentRequest* message.

The UE re-establishment delay ($T_{UE_re-establish_delay}$) is specified in section 6.1.2.1.

6.1.2.1 UE Re-establishment delay requirement

The UE re-establishment delay ($T_{UE_re-establish_delay}$) is the time between the moments when any of the conditions requiring RRC re-estbalishment as defined in section 5.3.7 in TS 36.331 [2] is detected by the UE to the time when the UE sends PRACH to the target cell. The UE re-establishment delay ($T_{UE_re-establish_delay}$) requirement shall be less than:

 $T_{UE-re-establish_delay} = 50 \text{ ms} + N_{freq} * Tsearch + T_{SI} + T_{PRACH}$

T_{search}: It is the time required by the UE to search the target cell.

 $T_{\text{search}} = \text{It is [100] ms if the target cell is known by the UE; the target cell is known if it has been measured by the UE in the last 5 seconds.$

 $T_{search} = It$ is 800 ms if the target cell is unknown by the UE; the target cell is unknown if it has not been measured by the UE in the last 5 seconds.

 $T_{SI} = 0$ in the cases where UE doesn"t need to read system information. Otherwise, T_{SI} is the time required for receiving all the relevant system information according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 36.331 [2] for E-UTRAN cell.

 T_{PRACH} = The additional delay caused by the random access procedure; it will be at least 10 ms due to random access occasion and there might be additional delay due to ramping procedure.

 N_{freq} : It is the total number of E-UTRA frequencies to be monitored for RRC re-establishment; $N_{freq} = 1$ if the target cell is known.

There is no requirement if the target cell does not contain the UE context.

6.2 Random Access

6.2.1 Introduction

The random access procedure is used when establishing the layer 1 communication between the UE and E-UTRAN. The random access is specified in section 6 of TS 36.213[3] and the control of the RACH transmission is specified in section 5.1 of TS 36.321[17].

6.2.2 Requirements

The UE shall have capability to calculate PRACH transmission power according to the PRACH power formula defined in TS 36.213[3] and apply this power level at the first preamble or additional preambles. The absolute power applied to the first preamble shall have an accuracy as specified in table x of TS 36.101[5]. The relative power applied to additional preambles shall have an accuracy as specified in table x of 36.101[5].

The UE shall indicate a Random Access problem to upper layers and transmit a preamble with the calculated PRACH transmission power if the maximum number of preamble transmission counter has been reached.

6.2.2.1 Contention based random access

6.2.2.1.1 Correct behaviour when receiving Random Access Response reception

The UE shall stop monitoring for Random Access Response(s) and transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

6.2.2.1.2 Correct behaviour when not receiving Random Access Response reception

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the TTI window [RA_WINDOW_BEGIN—RA_WINDOW_END].

6.2.2.1.3 Correct behaviour when receiving a NACK on msg3

The UE shall re-transmit the msg3 upon the reception of a NACK on msg3.

6.2.2.1.4 Correct behaviour when msg3 HARQ transmissions number reaching the maximum allowed number

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the backoff time expires.

6.2.2.1.5 Correct behaviour when receiving msg4

The UE shall send ACK if the Contention Resolution is successful.

The UE shall indicate recovery from a Random Access problem to upper layers if the PREAMBLE_TRANSMISSION_COUNTER is greater than PREAMBLE_TRANS_MAX when the Contention Resolution is successful.

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the backoff time expires if the UE Contention Resolution Identity included in the MAC control element does not match the CCCH SDU transmitted in the uplink message.

6.2.2.1.6 Correct behaviour when contention Resolution timer expires

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the backoff time expires if notification of a reception of a PDCCH transmission is not received from lower layers until the Contention Resolution Timer expires.

6.2.2.2 Non-Contention based random access

6.2.2.2.1 Correct behaviour when receiving Random Access Response

The UE shall stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall re-transmit the preamble with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

6.2.2.2.2 Correct behaviour when not receiving Random Access Response

The UE shall re-transmit the preamble with the calculated PRACH transmission power.

7 Timing and signalling characteristics

7.1 UE transmit timing

7.1.1 Introduction

The UE shall have capability to follow the frame timing change of the connected eNode B. The uplink frame transmission takes place approximately $(N_{TA} + N_{TA \text{ offset}}) \times T_s$ seconds before the reception of the first detected path (in time) of the corresponding downlink frame from the reference cell UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are defined in the following requirements.

7.1.2 Requirements

The UE initial transmission timing error shall be less than or equal to $[\pm 12^*T_s]$ seconds. This requirement applies when it is the first transmission in a DRX cycle for PUCCH, PUSCH and SRS or it is the PRACH transmission. The reference point for the UE initial transmit timing control requirement shall be the downlink timing minus $(N_{TA} + N_{TA \text{ offset}}) \times T_s$ seconds. The downlink timing is defined as the time when [the first detected path (in time)] of the corresponding downlink frame is received from the reference cell. N_{TA} is defined as 0 for PRACH and difference between UE transmit timing and the Downlink timing when the last timing advance in section 7.3 was applied for other channels.

When it is not the first transmission in a DRX cycle or there is no DRX cycle, and when it is the transmission for PUCCH, PUSCH and SRS transmission, the UE shall be capable of changing the transmission timing according to the received downlink frame except when the timing advance in section 7.3 is applied. When the transmission timing error between the UE and the reference timing exceeds $[\pm 12*T_s]$ seconds the UE is required to adjust its timing to within $[\pm 12*T_s]$ seconds. The reference timing shall be $(N_{TA} + N_{TA \text{ offset}}) \times T_s$ seconds before the downlink timing. All adjustments made to the UE timing shall follow these rules:

- 1) The maximum amount of the timing change in one adjustment shall be $[2*T_s]$ seconds.
- 2) The minimum adjustment rate shall be $[7*T_s]$ seconds per second.
- 3) The maximum adjustment rate shall be $[2*T_s]$ seconds per [200ms].

Taking into account the timing change in one adjustment can be less than [2*Ts] seconds and considering [800*d] ms period, the UE transmit timing shall not change in excess of $[\pm 8*d*T_S]$ seconds from the timing at the beginning of this [800*d] ms period, where $[0 \le d \le 1/4]$.

7.2 UE timer accuracy

7.2.1 Introduction

UE timers are used in different protocol entities to control the UE behaviour.

7.2.2 Requirements

For UE timers specified in section 7.3 in [2], UE shall comply with the timer accuracies according to Table 7.2.2-1.

The requirements are only related to the actual timing measurements internally in the UE. They do not include the following:

- Inaccuracy in the start and stop conditions of a timer (e.g. UE reaction time to detect that start and stop conditions of a timer is fulfilled), or
- Inaccuracies due to restrictions in observability of start and stop conditions of a UE timer (e.g. TTI alignment when UE sends messages at timer expiry).

Timer value [s]	Accuracy
timer value < [4]	±[0.1s]

± [2.5%]

timer value \geq [4]

Table 7.2.2-1

7.3 **Timing Advance**

7.3.1 Introduction

The timing advance is initiated from E-UTRAN with MAC message that implies and adjustment of the timing advance, see 3GPP TS 36.321 [17] section 5.2.

7.3.2 Requirements

7.3.2.1 Timing Advance adjustment delay

UE shall adjust the timing of its uplink transmission timing at sub-frame n+6 for a timing advancement command received in sub-frame n.

7.3.2.2 Timing Advance adjustment accuracy

The UE shall adjust the timing of its transmissions with an relative accuracy better than or equal to $[\pm 4^* T_s \text{ seconds}]$ to the signalled timing advance value compared to the timing of preceding uplink transmission. The timing advance command is expressed in multiples of $16*T_S$ and is relative to the current uplink timing.

7.4 Cell phase synchronization accuracy (TDD)

7.4.1 Definition

Cell phase synchronization accuracy is defined as the maximum absolute deviation in frame start timing between any pair of cells on the same frequency that have overlapping coverage areas.

7.4.2 Minimum requirements

The cell phase synchronization accuracy measured at BS antenna connectors shall be better than the requirement specified in table 7.4.2-1.

	Table 7.4.2-1		
Cell Type	Cell Radius	Requirement	
Small cell	≤ 3 km	≤ 3 μs	
Large cell	> 3 km	≤ 10 μs	

Synchronization Requirements for E-UTRAN to 1xRTT and 7.5 **HRPD** Handovers

7.5.1 Introduction

This section contains the synchronization requirements for eNodeB capable of supporting E-UTRAN to CDMA 1xRTT and HRPD handovers. To facilitate E-UTRAN to CDMA 1xRTT and HRPD handovers, the CDMA System Time

reference needs to be provided to the UE in order for the UE to report the pilot PN phases of the target 1xRTT or HRPD cells. This is achieved through the SIB8 message broadcasted by the serving eNodeB:

If the eNodeB is synchronized to the GPS time then the size of CDMA System Time information is 39 bits and the unit is 10 ms based on a 1.2288 Mcps chip rate.

If the eNodeB is not synchronized to the GPS time then the size of CDMA System Time information is 49 bits and the unit is 8 CDMA chips based on 1.2288 Mcps chip rate.

The CDMA system time reference provided by the serving eNodeB has to be within a certain level of accuracy in order to facilitate accurate reporting of the pilot PN phases of the target 1xRTT or HRPD cells and enable reliable handover to the 1xRTT or HRPD networks.

7.5.2 eNodeB Synchronization Requirements

7.5.2.1 Synchronized E-UTRAN

The eNodeB shall be synchronized to the GPS time. With external source of CDMA System Time disconnected, the eNodeB shall maintain the timing accuracy within $\pm 10 \mu s$ of CDMA System Time for a period of not less than 8 hours.

The timing deviation between the SFN boundary at or immediately after the ending boundary of the SI-window in which *SystemInformationBlockType8* (containing the broadcasted CDMA System Time with 10-ms granularity) is transmitted and the broadcasted CDMA System Time shall be within 10 µs.

7.5.2.2 Non-Synchronized E-UTRAN

The timing deviation between the SFN boundary at or immediately after the end of the boundary of the SI-window in which *SystemInformationBlockType8* (containing the broadcasted CDMA System Time with 8-chip granularity) is transmitted and the broadcasted CDMA System Time shall be within 10 μ s. With external source of CDMA System Time disconnected the SFN boundary at or immediately after the broadcasted CDMA System Time in the SIB8 message shall maintain the timing accuracy within ±10 μ s of CDMA System Time for a period of not less than 8 hours.

7.6 Radio Link Monitoring

7.6.1 Introduction

The UE shall monitor the downlink link quality based on the cell-specific reference signal in order to detect the downlink radio link quality of the serving cell as specified in [3].

The UE shall estimate the downlink radio link quality and compare it to the thresholds Q_{out} and Q_{in} for the purpose of monitoring downlink radio link quality of the serving cell.

The threshold Q_{out} is defined as the level at which the downlink radio link cannot be reliably received and shall correspond to [10%] block error rate of a hypothetical PDCCH transmission taking into account the PCFICH errors with transmission parameters specified in Table 7.6.1-1.

The threshold Q_{in} is defined as the level at which the downlink radio link quality can be significantly more reliably received than at Q_{out} and shall correspond to [2%] block error rate of a hypothetical PDCCH transmission taking into account the PCFICH errors with transmission parameters specified in Table 7.6.1-2.

Table 7.6.1-1 PDCCH/PCFICH transmission parameters for out-of-sync

M symbols

Ηz

	h ≤ [5] MHz	
	IHz	
:)	Ηz	
ergy to average RS RE energy	ration (1x2)	
	ration (2x2) and (4x2)	
ergy to average RS RE energy	ration (1x2)	
	ration (2x2) and (4x2)	
s defined in section 5.3.3.1.3 in 3GPP TS 36.212 [21].		

²CFICH transmission corresponding to the number of control symbols shall be

Table 7.6.1-2 PDCCH/PCFICH transmission parameters for in-sync

M symbols	Hz	
	h ≤ [5] MHz	
	IHz	
:)		
ergy to average RS RE energy	ration (1x2)	
	uration (2x2) and (4x2)	
nergy to average RS RE energy	ration (1x2)	
	ration (2x2) and (4x2)	
s defined in section 5.3.3.1.4 in 3GPP TS 36.212 [21].		

²CFICH transmission corresponding to the number of control symbols shall be

7.6.2 Requirements

7.6.2.1 Minimum requirement when no DRX is used

When the downlink radio link quality estimated over the last [200] ms period becomes worse than the threshold Q_{out} , Layer 1 of the UE shall send an out-of-sync indication to the higher layers within [200] ms Q_{out} evaluation period. A Layer 3 filter shall be applied to the out-of-sync indications as specified in [2].

When the downlink radio link quality estimated over the last [100] ms period becomes better than the threshold Q_{in} , Layer 1 of the UE shall send an in-sync indication to the higher layers within [100] ms Q_{in} evaluation period. A L3 filter shall be applied to the in-sync indications as specified in [2].

The out-of-sync and in-sync evaluations shall be performed as specified in section 4.2.1 in [3]. Two successive indications from Layer 1 shall be separated by at least [10] ms.

The transmitter power shall be turned off within [40] ms after expiry of T310 timer as specified in section 5.3.11 in [2].

7.6.2.2 Minimum requirement when DRX is used

When DRX is used the Q_{out} evaluation period ($T_{Evaluate}Q_{out_DRX}$) is specified in Table 7.6.2.2-1 will be used.

When the downlink radio link quality estimated over the last $T_{Evaluate}Q_{out_DRX}$ [s] period becomes worse than the threshold Q_{out} , Layer 1 of the UE shall send out-of-sync indication to the higher layers within $T_{Evaluate}Q_{out_DRX}$ [s] evaluation period. A Layer 3 filter shall be applied to the out-of-sync indications as specified in [2].

When the downlink radio link quality estimated over the last $T_{Evaluate}Q_{in_DRX}$ [s] period becomes better than the threshold Q_{in} , Layer 1 of the UE shall send in-sync indications to the higher layers within $T_{Evaluate}Q_{in_DRX}$ [s] evaluation period. A L3 filter shall be applied to the in-sync indications as specified in [2].

The out-of-sync and in-sync evaluations shall be performed as specified in section 4.2.1 in [3]. Two successive indications from Layer 1 shall be separated by at least max([10] ms, DRX_cycle_length).

Upon start of T310 timer as specified in section 5.3.11 in [2], the UE shall monitor the link for recovery using the evaluation period and Layer 1 indication interval corresponding to the non-DRX mode until the expiry of T310 timer.

The transmitter power shall be turned off within [40] ms after expiry of T310 counter as specified in section 5.3.11 in [2].

7.6.2.3 Minimum requirement at transitions

The out-of-sync and in-sync evaluations shall be performed as specified in section 4.2.1 in [3]. Two successive indications from Layer 1 shall be separated by at least max([10] ms, DRX_cycle_length).

[Editor"s note:

The following text captures the working assumption on the UE behaviour at transitions.

When the UE transitions between DRX and non-DRX or when DRX cycle periodicity changes, for a duration of time equal to the evaluation period corresponding to the second mode after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation periods corresponding to the first mode and the second mode. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second mode. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation.]

DRX cycle length (s)	T _{Evaluate} _Q _{out_DRX} (s) (DRX cycles)	
≤0.04	[Note (20)]	
0.08	[0.8 (10)]	
0.16	[1.6 (10)]	
0.32	[3.2 (10)]	
0.64	[6.4 (10)]	
1.28	[6.4 (5)]	
2.56	[12.8 (5)]	
Note: Evaluation period length in time depends on the length of the DRX		
cycle in use		

Table 7.6.2.2-1: Qout Evaluation Period in DRX

DRX cycle length (s)	T _{Evaluate} _Q _{in_DRX} (s) (DRX cycles)	
≤0.04	[Note (10)]	
0.08	[0.48 (6)]	
0.16	[0.96 (6)]	
0.32	[1.92 (6)]	
0.64	[3.84 (6)]	
1.28	[3.84 (3)]	
2.56	[7.68 (3)]	
Note: Evaluation period length in time depends on the length of the DRX		
cycle in use	-	

8 UE Measurements Procedures in RRC_CONNECTED State

8.1 General Measurement Requirements

8.1.1 Introduction

This section contains requirements on the UE regarding measurement reporting in RRC_CONNECTED state. The requirements are split in E-UTRA intra frequency, E-UTRA inter frequency, Inter-RAT UTRA FDD, UTRA TDD and GSM measurements. These measurements may be used by the E-UTRAN, e.g. for handover decisions. The measurement quantities are defined in [4], the measurement model is defined in [22] and measurement accuracies are specified in section 9. Control of measurement reporting is specified in [2].

8.1.2 Requirements

8.1.2.1 UE measurement capability

If the UE requires transmission gaps to identify and measure inter-frequency and/or inter-RAT cells, in order for the requirements in the following subsections to apply the E-UTRAN must provide a single transmission gap pattern with constant gap duration for concurrent monitoring of all frequency layers and RATs.

During the monitoring gaps the UE:

- shall not transmit any data
- is not expected to tune its receiver on the E-UTRAN serving carrier frequency.

Inter-frequency and inter-RAT measurement requirements within this section rely on the UE being configured with one monitoring gap pattern. UEs shall only support those measurement gap patterns listed in Table 8.1.2.1-1 that are relevant to its measurement capabilities.

Gap Pattern Id	Transmission Gap Length (TGL, ms)	Transmission Gap Repetition Period (TGRP, ms)	Minimum available time for inter-frequency and inter-RAT measurements during 480ms period (Tinter1, ms)	Measurement Purpose
0	6	40	60	Inter-Frequency E-UTRAN FDD and TDD, UTRAN FDD, GERAN, LCR TDD, HRPD, CDMA2000 1x
1	6	80	30	Inter-Frequency E-UTRAN FDD and TDD, UTRAN FDD, GERAN, LCR TDD, HRPD, CDMA2000 1x

 Table 8.1.2.1-1: Gap Pattern Configurations supported by the UE

[Editor"s note: Further patterns still need to be defined in order to fulfil all required Inter-RAT monitoring purposes.]

The requirements in section 9 are applicable for a UE performing measurements according to this section.

8.1.2.1.1 Monitoring of multiple layers using gaps

When monitoring of multiple inter-frequency E-UTRAN and inter-RAT (UTRAN, GSM) using gaps is configured, the UE shall be capable of performing one measurement of the configured measurement type (RSRP, RSRQ, UTRAN TDD P-CCPCH RSCP, UTRAN FDD CPICH measurements, GSM carrier RSSI, etc.) of detected cells on all the layers

The effective total number of frequencies being monitored is

 $N_{freq} = N_{freq, E-UTRA} + N_{freq, UTRA} + M_{gsm}$

where

 $N_{\mbox{freq, E-UTRA}}$ is the number of E-UTRA carriers being monitored (FDD and TDD)

 $N_{\text{freq},\text{UTRA}}$ is the number of UTRA carriers being monitored (FDD and TDD)

 M_{GSM} is an integer which is a function of the number of GSM carriers on which measurements are being performed. M_{GSM} is equal to 0 if no GSM carrier is being monitored. For a TGRP of 40 ms, M_{GSM} is equal to 1 if cells on up to 32 GSM carriers are being measured. For a TGRP of 80 ms, M_{GSM} is equal to [ceil($N_{carriers,GSM}$ /20)] where $N_{carriers,GSM}$ is the number of GSM carriers on which cells are being measured.

[Editor"s note: If additional gap patterns with periodicities other than 40 ms or 80 ms are added, M_{GSM} would need to be defined for them.]

[Editor"s note: Requirements for measurements on other RATs (cdma2000 and HRPD) when multiple layers are being monitored will need to be included into this section when the individual requirements for those RATs are defined in Section 8.1.2.]

[Editor"s note: A mandatory behaviour on how the UE utilizes monitoring gaps for the different layers will not be specified in 36.133.]

8.1.2.1.1.1 Maximum allowed layers for multiple monitoring

The UE shall be capable of monitoring using gaps a total of at least 7 carrier frequency layers comprising of any allowed combination of E-UTRA FDD, E-UTRA TDD, UTRA FDD, UTRA TDD and GSM layers (one GSM layer corresponds to 32 cells). The minimum performance requirements on the number of carriers which shall be monitored for each individual RAT are also applicable when multiple monitoring is used.

8.1.2.2 E-UTRAN intra frequency measurements

The UE shall be able to identify new intra-frequency cells and perform RSRP measurements of identified intrafrequency cells without an explicit intra-frequency neighbour cell list containing physical layer cell identities. During the RRC_CONNECTED state the UE shall continuously measure identified intra frequency cells and additionally search for and identify new intra frequency cells.

8.1.2.2.1 E-UTRAN FDD intra frequency measurements

8.1.2.2.1.1 E-UTRAN intra frequency measurements when no DRX is used

When no DRX is in use the UE shall be able to identify a new detectable FDD intra frequency cell within

$$T_{\text{identify intra}} = T_{\text{basic identify } E-UTRA_FDD, \text{ intra}} \cdot \frac{T_{\text{Measurement Period, Intra}}}{T_{\text{Intra}}} \quad ms$$

where

T_{basic identify E-UTRA FDD, intra} is 800 ms

A cell shall be considered detectable when

- RSRP related side condition given in Section 9.1 are fulfilled for a corresponding Band,
- SCH_RP \geq -127 dBm for Bands 1, 4, 6, 10 and SCH $\hat{E}s/Iot \geq$ 6 dB.
- SCH_RP|_{dBm} \geq -126 dBm for Band [9] and SCH \hat{E} s/Iot \geq 6 dB,
- SCH_RP $|_{dBm} \ge -125$ dBm for Bands 2, 5, 7, 11, 17 and SCH $\hat{E}s/Iot \ge -6$ dB,
- SCH_RP $|_{dBm} \ge -124$ dBm for Bands 3, 8, 12, 13, 14 and SCH $\hat{E}s/Iot \ge -6$ dB.

T_{Measurement Period,Intra} = 200 ms. The measurement period for Intra frequency RSRP measurements.

 T_{Intra} : This is the minimum time that is available for intra frequency measurements, during the measurement period with an arbitrarily chosen timing. Time is assumed to be available for performing intra frequency measurements whenever the receiver is guaranteed to be active on the intra frequency carrier.

Identification of a cell shall include detection of the cell and additionally performing a single measurement with measurement period of $T_{Measurement_Period Intra}$. If higher layer filtering is used, an additional cell identification delay can be expected.

In the RRC_CONNECTED state the measurement period for intra frequency measurements is 200 ms. When no measurement gaps are activated, the UE shall be capable of performing RSRPand RSRQ measurements for 8 identified-intra-frequency cells, and the UE physical layer shall be capable of reporting measurements to higher layers with the measurement period of 200 ms. When measurement gaps are activated the UE shall be capable of performing measurements for at least $Y_{measurement intra}$ cells, where $Y_{measurement intra}$ is defined in the following equation. If the UE has identified more than $Y_{measurement intra}$ cells, the UE shall perform measurements of all identified cells but the reporting rate of RSRP and RSRQ measurements of cells from UE physical layer to higher layers may be decreased.

$$\mathbf{Y}_{\text{measurement intra}} = Floor \left\{ X_{\text{basic measurement FDD}} \cdot \frac{\mathbf{T}_{\text{Intra}}}{\mathbf{T}_{\text{Measurement_Period, Intra}}} \right\} \text{ cells}$$

where

 $X_{\text{basic measurement FDD}} = 8$ (cells)

 $T_{Measurement_Period Intra} = 200 \text{ ms.}$ The measurement period for Intra frequency RSRP measurements.

 T_{Intra} : This is the time that is available for intra frequency measurements, during the measurement period with an arbitrarily chosen timing. Time is assumed to be available for performing intra frequency measurements whenever the receiver is guaranteed to be active on the intra frequency carrier.

The measurement accuracy for all measured cells shall be as specified in the sub-clause 9.1.

8.1.2.2.1.1.1 Measurement Reporting Requirements

8.1.2.2.1.1.1.1 Periodic Reporting

Reported measurements contained in periodically triggered measurement reports shall meet the requirements in section 9.

8.1.2.2.1.1.1.2 Event-triggered Periodic Reporting

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements in section 9.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in section 8.1.2.2.1.1.1.3 Event Triggered Reporting.

8.1.2.2.1.1.1.3 Event Triggered Reporting

Reported measurements contained in event triggered measurement reports shall meet the requirements in section 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: [2] x TTI_{DCCH} . This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than T $_{identify intra}$ defined in Section 8.1.2.2.1.1 When L3 filtering is used an additional delay can be expected.

If a cell has been detectable at least for the time period $T_{identify_intra}$ and then enters or leaves the reporting range, the event triggered measurement reporting delay shall be less than $T_{Measurement_Period Intra}$ provided the timing to that cell has not changed more than [FFS] while transmission gap has not been available and the L3 filter has not been used.

8.1.2.2.1.2 E-UTRAN intra frequency measurements when DRX is used

When DRX is in use the UE shall be able to identify a new detectable FDD intra frequency cell within $T_{identify_intra}$ as shown in table 8.1.2.2.1.2-1

DRX cycle length (s)	T _{identify_intra} (s) (DRX cycles)	
≤0.04	0.8 (Note1)	
0.04 <drx-< td=""><td>[Note2 (40)]</td></drx-<>	[Note2 (40)]	
cycle≤0.08		
0.08 <drx-< td=""><td>[Note2(20)]</td></drx-<>	[Note2(20)]	
cycle≤2.56		
Note1: Number of DRX cycle		
depends upon the DRX cycle in use		
Note2: Time depends upon the DRX		
cycle in use		

Table 8.1.2.2.1.2-1: Requirement to identify a newly detectable FDD intrafrequency cell

A cell shall be considered detectable when

- RSRP related side condition given in Section 9.1 are fulfilled for a corresponding Band,
- SCH_RP \geq -127 dBm for Bands 1, 4, 6, 10 and SCH $\hat{E}s/Iot \geq$ 6 dB.
- SCH_RP|_{dBm} \geq -126 dBm for Band 9 and SCH Ês/Iot \geq 6 dB,
- SCH_RP $|_{dBm} \ge$ -125 dBm for Bands 2, 5, 7, 11, 17 and SCH $\hat{E}s/Iot \ge$ 6 dB,
- SCH_RP $|_{dBm} \ge -124$ dBm for Bands 3, 8, 12, 13, 14 and SCH $\hat{E}s/Iot \ge -6$ dB.

In the RRC_CONNECTED state with DRX cycles of 80ms or greater the measurement period for intra frequency measurements is $T_{measure_intra}$ as shown in table 8.1.2.2.1.2-2. The UE shall be capable of performing RSRP measurements for [8] identified-intra-frequency cells, and the UE physical layer shall be capable of reporting measurements to higher layers with the measurement period of $T_{measure_intra}$.

Table 8.1.2.2.1.2-2: Requirement to measure FDD intrafrequency cells

DRX cycle length (s)	T _{measure_intra} (s) (DRX cycles)	
≤0.04	0.2 (Note1)	
0.04 <drx-< td=""><td>Note2 (5)</td></drx-<>	Note2 (5)	
cycle≤2.56		
Note1: Number of DRX cycle		
depends upon the DRX cycle in use		
Note2: Time depends upon the DRX		
cycle in use		

The measurement accuracy for all measured cells shall be as specified in the sub-clause 9.1.

8.1.2.2.1.2.1 Measurement Reporting Requirements

8.1.2.2.1.1.2.1 Periodic Reporting

Reported measurements contained in periodically triggered measurement reports shall meet the requirements in section 9.

8.1.2.2.1.1.2.2 Event-triggered Periodic Reporting

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements in section 9.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in section 8.1.2.2.1.1.2.3 Event Triggered Reporting.

8.1.2.2.1.1.2.3 Event Triggered Reporting

Reported measurements contained in event triggered measurement reports shall meet the requirements in section 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: [2] x TTI_{DCCH} . This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than T $_{identify_{intra}}$ defined in Section 8.1.2.2.1.1 When L3 filtering is used an additional delay can be expected.

If a cell has been detectable at least for the time period $T_{identify_intra}$ and then enters or leaves the reporting range, the event triggered measurement reporting delay shall be less than $T_{measure_intra}$ provided the timing to that cell has not changed more than [FFS] while transmission gap has not been available and the L3 filter has not been used.

8.1.2.2.2 E-UTRAN TDD intra frequency measurements

8.1.2.2.2.1 E-UTRAN intra frequency measurements when no DRX is used

When no DRX is in use the UE shall be able to identify a new detectable TDD intra frequency cell within

$$T_{\text{identify intra}} = T_{\text{basic identify } E-UTRA_TDD, \text{ intra}} \cdot \frac{T_{\text{Measurement Period, Intra}}}{T_{\text{Intra}}} \quad ms$$

where

T_{basic_identify_E-UTRA_TDD, intra} is [800] ms

A cell shall be considered detectable when

- RSRP related side condition given in Section 9.1 are fulfilled for a corresponding Band,
- SCH_RP \geq -127 dBm for Bands 33, 34, 35, 36, 37, 38, 39, 40 and SCH $\hat{E}_s/Iot \geq$ 6 dB.

 $T_{\text{Measurement}_Period Intra} = [200]$ ms. The measurement period for Intra frequency RSRP measurements.

 T_{Intra} : This is the minimum time that is available for intra frequency measurements, during the measurement period with an arbitrarily chosen timing.

If higher layer filtering is used, an additional cell identification delay can be expected.

In the RRC_CONNECTED state the measurement period for intra frequency measurements is [200] ms. When no measurement gaps are activated, the UE shall be capable of performing RSRP measurements for [8] identified-intra-frequency cells, and the UE physical layer shall be capable of reporting measurements to higher layers with the measurement period of [200] ms. When measurement gaps are activated the UE shall be capable of performing measurements to higher layers with the measurements for at least $Y_{measurement intra}$ cells, where $Y_{measurement intra}$ is defined in the following equation. If the UE has identified more than $Y_{measurement intra}$ cells, the UE shall perform measurements of all identified cells but the reporting rate of RSRP measurements of cells from UE physical layer to higher layers may be decreased.

$$Y_{\text{measurement intra}} = Floor \left\{ X_{\text{basic measurement TDD}} \cdot \frac{T_{\text{Intra}}}{T_{\text{Measurement_Period, Intra}}} \right\} \text{cells}$$

where

 $X_{\text{basic measurement TDD}} = [8] \text{ (cells)}$

T_{Measurement_Period Intra} = [200] ms. The measurement period for Intra frequency RSRP measurements.

 T_{Intra} : This is the minimum time that is available for intra frequency measurements, during the measurement period with an arbitrarily chosen timing.

The measurement accuracy for all measured cells shall be as specified in the sub-clause 9.1.

8.1.2.2.2.1.1 Measurement Reporting Requirements

8.1.2.2.2.1.1.1 Periodic Reporting

Reported measurements contained in periodically triggered measurement reports shall meet the requirements in section 9.

8.1.2.2.2.1.1.2 Event-triggered Periodic Reporting

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements in section 9.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in section 8.1.2.2.2.1.1.3 Event Triggered Reporting.

8.1.2.2.2.1.1.3 Event Triggered Reporting

Reported measurements contained in event triggered measurement reports shall meet the requirements in section 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: [2] x TTI_{DCCH} . This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than T $_{identify intra}$ defined in Section 8.1.2.2.2.1 When L3 filtering is used an additional delay can be expected.

If a cell has been detectable at least for the time period $T_{identify_intra}$ and then enters or leaves the reporting range, the event triggered measurement reporting delay shall be less than $T_{Measurement_Period Intra}$ provided the timing to that cell has not changed more than [FFS] Ts while transmission gap has not been available and the L3 filter has not been used.

8.1.2.2.2.2 E-UTRAN intra frequency measurements when DRX is used

When DRX is in use the UE shall be able to identify a new detectable TDD intra frequency cell within $T_{identify_{intra}}$ as shown in table 8.1.2.2.2.2-1

DRX cycle length (s)	T _{identify_intra} (s) (DRX cycles)		
≤0.04	0.8 (Note1)		
0.04 <drx-< td=""><td>[Note2 (40)]</td></drx-<>	[Note2 (40)]		
cycle≤0.08			
0.08 <drx-< td=""><td>[Note2(20)]</td></drx-<>	[Note2(20)]		
cycle≤2.56			
Note1: Number of DRX cycle			
depends upon the DRX cycle in use			
Note2: Time depends upon the DRX			
cycle in use			

A cell shall be considered detectable when

- RSRP related side condition given in Section 9.1 are fulfilled for a corresponding Band,
- SCH_RP \geq -127 dBm for Bands 33, 34, 35, 36, 37, 38, 39, 40 and SCH $\hat{E}_s/Iot \geq$ 6 dB.

In the RRC_CONNECTED state with DRX cycles of 80ms or greater the measurement period for intra frequency measurements is $T_{measure_intra}$ as shown in table 8.1.2.2.2.2.2. The UE shall be capable of performing RSRP measurements for [8] identified-intra-frequency cells and the UE physical layer shall be capable of reporting measurements to higher layers with the measurement period of $T_{measure_intra}$.

Table 8.1.2.2.2.2-2: Requirement to measure TDD intra frequency cells

DRX cycle length (s)	T _{identify_intra} (s) (DRX cycles)	
≤0.04	0.8 (Note1)	
0.04 <drx-< td=""><td>[Note2 (40)]</td></drx-<>	[Note2 (40)]	
cycle≤0.08		
0.08 <drx-< td=""><td>[Note2(20)]</td></drx-<>	[Note2(20)]	
cycle≤2.56		
Note1: Number of DRX cycle		
depends upon the DRX cycle in use		
Note2: Time depends upon the DRX		
cycle in use		

The measurement accuracy for all measured cells shall be as specified in the sub-clause 9.1.

8.1.2.2.2.1 Measurement Reporting Requirements

8.1.2.2.2.2.1.1 Periodic Reporting

Reported measurements contained in periodically triggered measurement reports shall meet the requirements in section 9.

8.1.2.2.2.1.2 Event-triggered Periodic Reporting

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements in section 9.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in section 8.1.2.2.2.2.1.3 Event Triggered Reporting.

8.1.2.2.2.2.1.3 Event Triggered Reporting

Reported measurements contained in event triggered measurement reports shall meet the requirements in section 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: [2] x TTI_{DCCH} . This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than T $_{identify_{intra}}$ defined in Section 8.1.2.2.2.2 When L3 filtering is used an additional delay can be expected.

If a cell has been detectable at least for the time period $T_{identify_intra}$ and then enters or leaves the reporting range, the event triggered measurement reporting delay shall be less than $T_{measure_intra}$ provided the timing to that cell has not changed more than [FFS] Ts while transmission gap has not been available and the L3 filter has not been used.

8.1.2.3 E-UTRAN inter frequency measurements

The UE shall be able to identify new inter-frequency cells and perform RSRP measurements of identified interfrequency cells if carrier frequency information is provided by the serving cell, even if no explicit neighbour list with physical layer cell identities is provided.

8.1.2.3.1 E-UTRAN FDD – FDD inter frequency measurements

8.1.2.3.1.1 E-UTRAN FDD – FDD inter frequency measurements when no DRX is used

When transmission gaps are scheduled the UE shall be able to identify a new FDD inter-frequency within $T_{Identify_Inter}$ according to the following expression:

$$T_{Identify_Inter} = T_{Basic_Identify_Inter} \cdot \frac{480}{T_{Inter}} \cdot N_{freq} \quad ms$$

Where:

 $T_{Basic_Identify_Inter} = 480$ ms. It is the time period used in the inter frequency equation where the maximum allowed time for the UE to identify a new FDD inter-frequency cell is defined.

 N_{freq} and T_{inter1} are defined in section 8.1.2.1.1

A cell shall be considered detectable provided following conditions are fulfilled:

- RSRP related side condition given in Section 9.1 are fulfilled for a corresponding Band,
- SCH_RP|_{dBm} \ge -127 dBm for Bands 1, 4, 6, 10 and SCH \hat{E} s/Iot \ge -4 dB,
- SCH_RP|_{dBm} \geq -126 dBm for Band 9 and SCH \hat{E} s/Iot \geq -4 dB,
- SCH_RP $|_{dBm} \ge -125$ dBm for Bands 2, 5, 7, 11, 17 and SCH $\hat{E}s/Iot \ge -4$ dB,
- SCH_RP $|_{dBm} \ge -124$ dBm for Bands 3, 8, 12, 13, 14 and SCH_RP/Iot > -4 dB.

When transmission gaps are scheduled for FDD inter frequency measurements the UE physical layer shall be capable of reporting measurements to higher layers with measurement accuracy as specified in sub-clause 9.1.3 with measurement period given by table 8.1.2.3.1.1-1.

Configuration	Physical Layer Measurement period: T _{Measurement_Period_Inter_FDD} [ms]	Measurement bandwidth [RB]
0	480 x N _{freq}	6
1 (Note)	240 x N _{freq}	50
TBD	TBD	TBD

Table 8.1.2.3.1.1-1: RSRP measurement period and measurement bandwidth

Where:

 N_{freq} and T_{inter1} are defined in section 8.1.2.1.1

The UE shall be capable of performing RSRP and RSRQ measurements of at least 4 inter-frequency cells per FDD inter-frequency for up to 3 FDD inter-frequencies and the UE physical layer shall be capable of reporting RSRP and RSRQ measurements to higher layers with the measurement period defined in Table 8.1.2.3.1-1.

8.1.2.3.1.1.1 Measurement Reporting Requirements

8.1.2.3.1.1.1.1 Periodic Reporting

Reported measurements contained in periodically triggered measurement reports shall meet the requirements in section 9.

8.1.2.3.1.1.1.2 Event-triggered Periodic Reporting

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements in section 9.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in section 8.1.2.2.5 Event Triggered Reporting.

8.1.2.3.1.1.1.3 Event Triggered Reporting

Reported measurements contained in event triggered measurement reports shall meet the requirements in section 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $[2] \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than T $_{identify-inter}$ defined in Section 8.1.2.2.1.1 When L3 filtering is used an additional delay can be expected.

If a cell has been detectable at least for the time period $T_{identify_inter}$ and then enters or leaves the reporting range, the event triggered measurement reporting delay shall be less than $T_{Measurement_Period_Inter_FDD}$ provided the timing to that cell has not changed more than [FFS] while transmission gap has not been available and the L3 filter has not been used.

8.1.2.3.1.2 E-UTRAN FDD – FDD inter frequency measurements when DRX is used

When DRX is in use the UE shall be able to identify a new detectable E-UTRAN FDD inter frequency cell within $T_{identify_inter}$ as shown in table 8.1.2.3.1.2-1

DRX	Tidentify_inter (s) (DRX cycles)			
cycle	Gap period	Gap period		
length (s)	= 40 ms	= 80 ms		
≤0.04	Non DRX	Non DRX		
	Requirements	Requirements		
	in section	in section		
	8.1.2.3.1.1	8.1.2.3.1.1		
	are applicable	are applicable		
0.08	[3.84*N _{freq}	[7.68*N _{freq}		
	(48*N _{freq})]	(96*N _{freq})]		
0.16	[3.84*N _{freq}	[7.68*N _{freq}		
	(24*N _{freq})]	(48*N _{freq})]		
0.32	[6.4*N _{freq}	[7.68*N _{freq}		
	(20*N _{freq})]	(24*N _{freq})]		
0.64	[12.8*N _{freq}	[12.8*N _{freq}		
	(20*N _{freq})]	(20*N _{freq})]		
1.28	[25.6*N _{freq}	[25.6*N _{freq}		
	(20*N _{freq})]	(20*N _{freq})]		
2.56	[51.2*N _{freq}	[51.2*N _{freq}		
	(20*N _{freq})]	(20*N _{freq})]		

A cell shall be considered detectable provided following conditions are fulfilled:

- RSRP related side condition given in Section 9.1 are fulfilled for a corresponding Band.
- SCH_RP|_{dBm} \geq -127 dBm for Bands 1, 4, 6, 10, 33, 34, 35, 36, 37, 38, 39 and 40 and SCH $\hat{E}s/Iot \geq -4 dB$,
- SCH_RP|_{dBm} \ge -126 dBm for Band 9 and SCH $\hat{E}s/Iot \ge$ -4 dB,
- SCH_RP $|_{dBm} \ge -125$ dBm for Bands 2, 5, 7, 11, 17 and SCH $\hat{E}s/Iot \ge -4$ dB,
- SCH_RP $|_{dBm} \ge -124$ dBm for Bands 3, 8, 13, 14 and SCH $\hat{E}s/Iot \ge -4$ dB.

The UE shall be capable of performing RSRP and RSRQ measurements of at least 4 inter-frequency cells per FDD inter-frequency for up to 3 FDD inter-frequencies and the UE physical layer shall be capable of reporting RSRP and RSRQ measurements to higher layers with the measurement period defined in table 8.1.2.3.1.2-2.

Table 8.1.2.3.1.2-2: Requirement to measure FDD interfrequency cells

DRX cycle length (s)	T _{measure_inter} (s) (DRX cycles)	
≤0.04	Non DRX	
	Requirements in	
	section 8.1.2.3.1.1	
	are applicable	
0.04 <drx-< td=""><td>0.48*N_{freq} (6*N_{freq})</td></drx-<>	0.48*N _{freq} (6*N _{freq})	
cycle≤0.08		
0.08 <drx-< td=""><td>Note (5*N_{freq})</td></drx-<>	Note (5*N _{freq})	
cycle≤0.16		
Note: Time depends upon the DRX		
cycle in use		

The measurement accuracy for all measured cells shall be as specified in the sub-clause 9.1.

8.1.2.3.1.2.1 Measurement Reporting Requirements

8.1.2.3.1.1.2.1 Periodic Reporting

Reported measurements contained in periodically triggered measurement reports shall meet the requirements in section 9.

8.1.2.3.1.1.2.2 Event-triggered Periodic Reporting

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements in section 9.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in section 8.1.2.2.5 Event Triggered Reporting.

8.1.2.3.1.1.2.3 Event Triggered Reporting

Reported measurements contained in event triggered measurement reports shall meet the requirements in section 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: [2] x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify_{inter}}$ defined in Section 8.1.2.2.1.1 When L3 filtering is used an additional delay can be expected.

If a cell has been detectable at least for the time period $T_{identify_inter}$ and then enters or leaves the reporting range, the event triggered measurement reporting delay shall be less than $T_{measure_inter}$ provided the timing to that cell has not changed more than [FFS] while transmission gap has not been available and the L3 filter has not been used.

8.1.2.3.2 E-UTRAN TDD – TDD inter frequency measurements

8.1.2.3.2.1 E-UTRAN TDD – TDD inter frequency measurements when no DRX is used

When transmission gaps are scheduled the UE shall be able to identify a new TDD inter-frequency within $T_{Identify_Inter}$ according to the following expression:

$$\Gamma_{\text{Identify_Inter}} = T_{\text{Basic_Identify_Inter}} \cdot \frac{480}{T_{\text{Inter}1}} \cdot N_{freq} \quad ms$$

Where:

 $T_{Basic_Identify_Inter} = 480$ ms. It is the time period used in the inter frequency equation where the maximum allowed time for the UE to identify a new TDD inter-frequency cell is defined.

 N_{freq} and T_{inter1} are defined in section 8.1.2.1.1

A cell shall be considered detectable provided following conditions are fulfilled:

- RSRP related side condition given in Section 9.1 are fulfilled for a corresponding Band,
- SCH_RP|_{dBm} \geq -127 dBm for Bands 33, 34, 35, 36, 37, 38, 39, 40 and SCH $\hat{E}s/Iot \geq$ -4 dB,

When transmission gaps are scheduled for TDD inter frequency measurements the UE physical layer shall be capable of reporting measurements to higher layers with measurement accuracy as specified in sub-clause 9.1.3 with measurement period ($T_{Measurement_Period_TDD_Inter$) given by table 8.1.2.3.2.1-1:

Configuration	Measurement bandwidth [RB]	Number of UL/DL sub- frames per half frame (5 ms)		DwPTS		T _{Measurement_} Period_TDD _Inter [ms]
		DL	UL	Normal CP	Extended CP	
0	6	2	2	$19760 \cdot T_s$	$20480 \cdot T_s$	480 x N _{freq}
1 (Note 1)	50	2	2	$19760 \cdot T_s$	$20480 \cdot T_s$	240 x N _{freq}
Note 1: This configuration is optional						
Note 2: T _s is defined in 3GPP TS 36.211 [16]						

Table 8.1.2.3.2.1-1: T_{Measurement_Period_TDD_Inter} for different configurations

Where:

 N_{freq} is defined in section 8.1.2.1.1.

The UE shall be capable of performing RSRP and RSRQ measurements of at least 4 inter-frequency cells per TDD inter-frequency for up to 3 TDD inter-frequencies and the UE physical layer shall be capable of reporting RSRP and RSRQ measurements to higher layers with the measurement period $T_{Measurement_Period_TDD_Inter}$.

8.1.2.3.2.1.1 Measurement Reporting Requirements

8.1.2.3.2.1.1.1 Periodic Reporting

Reported measurements contained in periodically triggered measurement reports shall meet the requirements in section 9.

8.1.2.3.2.1.1.2 Event-triggered Periodic Reporting

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements in section 9.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in section 8.1.2.3.2.1.1.3 Event Triggered Reporting.

8.1.2.3.2.1.1.3 Event Triggered Reporting

Reported measurements contained in event triggered measurement reports shall meet the requirements in section 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: [2] x TTI_{DCCH} . This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{Identify_Inter}$ defined in Section 8.1.2.3.2.1 When L3 filtering is used an additional delay can be expected.

If a cell has been detectable at least for the time period $T_{Identify_Inter}$ and then enters or leaves the reporting range, the event triggered measurement reporting delay shall be less than $T_{Measurement_Period_TDD_Inter}$ provided the timing to that cell has not changed more than [FFS] Ts while transmission gap has not been available and the L3 filter has not been used.

8.1.2.3.2.2 E-UTRAN TDD – TDD inter frequency measurements when DRX is used

When DRX is in use the UE shall be able to identify a new detectable E-UTRAN TDD inter frequency cell within $T_{identify_{inter}}$ as shown in table 8.1.2.3.2.2-1

DRX	Tidentify_inter (s) (DRX cycles)					
cycle	Gap period =	Gap period =				
length (s)	40 ms	80 ms				
≤0.04	Non DRX	Non DRX				
	Requirements	Requirements				
	in section	in section				
	8.1.2.3.1.1 are	8.1.2.3.1.1 are				
	applicable	applicable				
0.08	[3.84*N _{freq}	[7.68*N _{freq}				
	(48*N _{freq})]	(96*N _{freq})]				
0.16	[3.84*N _{freq}	[7.68*N _{freq}				
	(24*N _{freq})]	(48*N _{freq})]				
0.32	[6.4*N _{freq}	[7.68*N _{freq}				
	(20*N _{freq})]	(24*N _{freq})]				
0.64	[12.8*N _{freq}	[12.8*N _{freq}				
	(20*N _{freq})]	(20*N _{freq})]				
1.28	[25.6*N _{freq}	[25.6*N _{freq}				
	(20*N _{freq})]	(20*N _{freq})]				
2.56	[51.2*N _{freq}	[51.2*N _{freq}				
	(20*N _{freq})]	(20*N _{freq})]				

A cell shall be considered detectable provided following conditions are fulfilled:

- RSRP related side condition given in Section 9.1 are fulfilled for a corresponding Band.
- SCH_RP|_{dBm} \ge -127 dBm for Bands 33, 34, 35, 36, 37, 38, 39, 40 and SCH $\hat{E}s/Iot \ge -4 dB$,

The UE shall be capable of performing RSRP and RSRQ measurements of at least 4 inter-frequency cells per TDD inter-frequency for up to 3 TDD inter-frequencies and the UE physical layer shall be capable of reporting RSRP and RSRQ measurements to higher layers with the measurement period defined in Table 8.1.2.3.2.2-2.

DRX cycle length (s)	T _{measure_inter} (s) (DRX cycles)	
≤0.04	Non DRX	
	Requirements in	
	section 8.1.2.3.1.1	
	are applicable	
[0.04 <drx-< td=""><td>0.48*N_{freq} (6*N_{freq})</td></drx-<>	0.48*N _{freq} (6*N _{freq})	
cycle≤0.08]		
0.08 <drx-< td=""><td>Note (5*N_{freq})</td></drx-<>	Note (5*N _{freq})	
cycle≤2.56]		
Note: Time depends upon the DRX		
cycle in use		

The measurement accuracy for all measured cells shall be as specified in the sub-clause 9.1.

8.1.2.3.2.2.1 Measurement Reporting Requirements

8.1.2.3.2.2.1.1 Periodic Reporting

Reported measurements contained in periodically triggered measurement reports shall meet the requirements in section 9.

8.1.2.3.2.2.1.2 Event-triggered Periodic Reporting

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements in section 9.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in section 8.1.2.3.2.2.1.3 Event Triggered Reporting.

8.1.2.3.2.2.1.3 Event Triggered Reporting

Reported measurements contained in event triggered measurement reports shall meet the requirements in section 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: [2] x TTI_{DCCH} . This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{Identify_Inter}$ defined in Section 8.1.2.3.2.2 When L3 filtering is used an additional delay can be expected.

If a cell has been detectable at least for the time period $T_{Identify_Inter}$ and then enters or leaves the reporting range, the event triggered measurement reporting delay shall be less than $T_{measure_inter}$ provided the timing to that cell has not changed more than [FFS] Ts while transmission gap has not been available and the L3 filter has not been used.

8.1.2.3.3 E-UTRAN TDD – FDD inter frequency measurements

8.1.2.3.3.1 E-UTRAN TDD – FDD inter frequency measurements when no DRX is used

The requirements in this section shall apply to UE supporting FDD and TDD.

The requirements in section 8.1.2.3.1.1 also apply for this section.

8.1.2.3.3.2 E-UTRAN TDD – FDD inter frequency measurements when DRX is used

The requirements in this section shall apply to UE supporting FDD and TDD.

The requirements in section 8.1.2.3.1.2 also apply for this section.

8.1.2.3.3.2 (Void)

8.1.2.3.4 E-UTRAN FDD – TDD inter frequency measurements

8.1.2.3.4.1 E-UTRAN FDD – TDD inter frequency measurements when no DRX is used

The requirements in this section shall apply to UE supporting FDD and TDD.

The requirements in section 8.1.2.3.2.1 also apply for this section.

8.1.2.3.4.2 E-UTRAN FDD – TDD inter frequency measurements when DRX is used

The requirements in this section shall apply to UE supporting FDD and TDD.

The requirements in section 8.1.2.3.2.2 also apply for this section.

8.1.2.4 Inter RAT measurements

8.1.2.4.1 E-UTRAN FDD – UTRAN FDD measurements

8.1.2.4.1.1 E-UTRAN FDD – UTRAN FDD measurements when no DRX is used

8.1.2.4.1.1.1 Identification of a new UTRA FDD cell

When explicit neighbour list is provided and no DRX is used the UE shall be able to identify a new detectable cell belonging to the monitored set within

$$T_{\text{identify, UTRA_FDD}} = T_{\text{basic_identify_UTRA_FDD}} \cdot \frac{480}{T_{\text{interl}}} \cdot N_{Freq} \quad ms$$

A cell shall be considered detectable when

- CPICH Ec/Io \geq -20 dB,
- SCH_Ec/Io ≥ -17 dB for at least one channel tap and SCH_Ec/Ior is equally divided between primary synchronisation code and secondary synchronisation code. When L3 filtering is used an additional delay can be expected.

8.1.2.4.1.1.2 UE UTRA FDD CPICH measurement capability

.

When transmission gaps are scheduled for UTRA FDD inter RAT measurements the UE physical layer shall be capable of reporting measurements to higher layers with measurement accuracy as specified in Section 9.2 with measurement period given by

$$\mathbf{T}_{\text{measurement}_UTRA_FDD} = Max \left\{ \mathbf{T}_{\text{Measurement}_Period UTRA_FDD}, \mathbf{T}_{\text{basic}_measurement}_UTRA_FDD} \cdot \frac{480}{\mathbf{T}_{\text{interl}}} \cdot N_{Freq} \right\} ms$$

If the UE does not need measurement gaps to perform UTRA FDD measurements, the measurement period for UTRA FDD measurements is 480 ms.

The UE shall be capable of performing UTRA FDD CPICH measurements for $X_{basic measurementUTRA_FDD}$ inter-frequency cells per FDD frequency of the monitored set, and the UE physical layer shall be capable of reporting measurements to higher layers with the measurement period of $T_{Measurement_UTRA_FDD}$.

 $X_{\text{basic measurement UTRA_FDD}} = 6$

 $T_{Measurement_Period UTRA_FDD} = 480$ ms. The period used for calculating the measurement period $T_{measurement_UTRA_FDD}$ for UTRA FDD CPICH measurements.

 $T_{\text{basic_identify}_UTRA_FDD} = 300 \text{ ms.}$ This is the time period used in the inter RAT equation where the maximum allowed time for the UE to identify a new UTRA FDD cell is defined.

 $T_{\text{basic_measurement_UTRA_FDD}} = 50$ ms. This is the time period used in the equation for defining the measurement period for inter RAT CPICH measurements.

N_{freq} and T_{inter1} are defined in section 8.1.2.1.1

8.1.2.4.1.1.3 Periodic Reporting

Reported measurements in periodically triggered measurement reports shall meet the requirements in section 9.

8.1.2.4.1.1.4 Event Triggered Reporting

Reported measurements in event triggered measurement reports shall meet the requirements in section 9.

The UE shall not send any event triggered measurement reports, as long as the reporting criteria is not fulfilled.

The measurement reporting delay is defined as the time between any event that will trigger a measurement report until the UE starts to transmit the measurement report over the Uu interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is twice the TTI of the uplink DCCH. This measurement reporting delay excludes a delay uncertainty for the uplink DCCH. This measurement reporting delay excludes a delay uncertainty is twice the TTI of the uplink DCCH. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify, UTRA_FDD}$ defined in Section 8.1.2.4.1.1.1 When L3 filtering is used an additional delay can be expected.

8.1.2.4.1.2 E-UTRAN FDD – UTRAN FDD measurements when DRX is used

When explicit neighbour list is provided and DRX is used the UE shall be able to identify a new detectable cell belonging to the neighbour cell list within $T_{identify,UTRA_FDD}$ as shown in table 8.1.2.4.1.2-1

DRX cycle length (s)	T _{identify_inter} (s) (DRX cycles)		
	Gap period	Gap period	
	= 40 ms	= 80 ms	
≤0.04	Non DRX	Non DRX	
	Requirements	Requirements	
	in section	in section	
	8.1.2.3.1.1	8.1.2.3.1.1	
	are applicable	are applicable	
0.04 <drx-< td=""><td>3.2* N_{freq}</td><td>7.2* N_{freq}</td></drx-<>	3.2* N _{freq}	7.2* N _{freq}	
cycle≤0.08	(40* N _{freq})	(90* N _{freq})	
0.08 <drx-< td=""><td>3.2* N_{freq}</td><td>7.2* N_{freq}</td></drx-<>	3.2* N _{freq}	7.2* N _{freq}	
cycle≤0.16	(20* N _{freq})	(45* N _{freq})	
0.16 <drx-< td=""><td>6.4* N_{freq}</td><td>7.36* N_{freq}</td></drx-<>	6.4* N _{freq}	7.36* N _{freq}	
cycle≤0.32	(20* N _{freg})	(23* N _{freq})	
0.32 <drx-< td=""><td>Note (20*</td><td>Note</td></drx-<>	Note (20*	Note	
cycle≤2.56	N _{freq})	(20* N _{freq})	
Note: Time depends upon the DRX cycle in			
use			

Table 8.1.2.4.1.2	-1: Requireme	ent to identify	y a newly detectab	le UTRA FDD cell
	DBX avala	т	(c) (DBX avalac)	

A cell shall be considered detectable provided following conditions are fulfilled: A cell shall be considered detectable when

- CPICH Ec/Io \geq -20 dB,
- SCH_Ec/Io ≥ -17 dB for at least one channel tap and SCH_Ec/Ior is equally divided between primary synchronisation code and secondary synchronisation code. When L3 filtering is used an additional delay can be expected.

The UE shall be capable of performing RSCP and Ec/Io measurements of at least 6 UTRA cells per UTRA FDD carrier for up to 3 UTRA FDD carriers and the UE physical layer shall be capable of reporting RSCP and Ec/Io measurements to higher layers with the measurement period defined in table 8.1.2.3.1.2-2.

DRX cycle length (s)	T _{measure_inter} (s) (DRX cycles)	
≤0.04	Non DRX	
	Requirements in	
	section 8.1.2.4.1.1	
	are applicable	
0.04 <drx-< td=""><td>0.48*N_{freq} (6*N_{freq})</td></drx-<>	0.48*N _{freq} (6*N _{freq})	
cycle≤0.08		
0.04 <drx-< td=""><td>Note (5*N_{freq})</td></drx-<>	Note (5*N _{freq})	
cycle≤2.56		
Note: Time depends upon the DRX		
cycle in use		

Table 8.1.2.4.1.2-2: Requirement to measure UTRA FDD cells

The measurement accuracy for all measured cells shall be as specified in the sub-clause 9.1.

8.1.2.4.1.2.1 Periodic Reporting

Reported measurements in periodically triggered measurement reports shall meet the requirements in section 9.

8.1.2.4.1.2.2 Event Triggered Reporting

Reported measurements in event triggered measurement reports shall meet the requirements in section 9.

The UE shall not send any event triggered measurement reports, as long as the reporting criteria is not fulfilled.

The measurement reporting delay is defined as the time between any event that will trigger a measurement report until the UE starts to transmit the measurement report over the Uu interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is twice the TTI of the uplink DCCH. This measurement reporting delay excludes a delay uncertainty for the uplink DCCH. This measurement reporting delay excludes a delay uncertainty is twice the TTI of the uplink DCCH. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify,UTRA_FDD}$ defined in Section 8.1.2.4.1.2 When L3 filtering is used an additional delay can be expected.

8.1.2.4.2 E-UTRAN TDD – UTRAN FDD measurements

The requirements in section 8.1.2.4.1 also apply for this section.

8.1.2.4.2.1	E-UTRAN TDD – UTRAN FDD measurements when no DRX is used	
8.1.2.4.2.2	E-UTRAN TDD – UTRAN FDD measurements when DRX is used	
8.1.2.4.3	E-UTRAN TDD – UTRAN TDD measurements	
8.1.2.4.3.1	E-UTRAN TDD – UTRAN TDD measurements when no DRX is used	
8.1.2.4.3.1.1	Identification of a new UTRA TDD cell	
XX 71 1		

When explicit neighbour list is provided and no DRX is used the UE shall be able to identify a new detectable cell belonging to the monitored set within

$$T_{\text{identify, UTRA_TDD}} = Max \left\{ 5000, T_{\text{basic identify UTRA_TDD}} \cdot \frac{480}{T_{\text{interl}}} \cdot N_{Freq} \right\} ms$$

If the UE does not require transmit gap to perform inter-RAT UTRA TDD measurements, the UE shall be able to identify a new detectable inter-RAT UTRA TDD cell belonging to the monitored set within 5000 ms.

A cell shall be considered detectable when

- P-CCPCH Ec/Io \geq -8 dB,
- DwPCH_Ec/Io \geq -5 dB.

When L3 filtering is used an additional delay can be expected.

8.1.2.4.3.1.2 UE UTRA TDD P-CCPCH RSCP measurement capability

When transmission gaps are scheduled for UTRA TDD inter RAT measurements the UE physical layer shall be capable of reporting measurements to higher layers with measurement accuracy as specified in Section 9.3 with measurement period given by

$$T_{\text{measurement UTRA_TDD}} = Max \left\{ T_{\text{Measurement_Period UTRA_TDD}}, T_{\text{basic measurement UTRA_TDD}} \cdot \frac{480}{T_{\text{inter1}}} \cdot N_{Freq} \right\} ms$$

If the UE does not need measurement gaps to perform UTRA TDD measurements, the measurement period for UTRA TDD measurements is 480 ms.

The UE shall be capable of performing UTRA TDD P-CCPCH RSCP measurements for $X_{basic measurementUTRA_TDD}$ interfrequency cells per TDD frequency of the monitored set for up to 3 UTRA TDD carrier frequencies, and the UE physical layer shall be capable of reporting measurements to higher layers with the measurement period of $T_{Measurement_UTRA_TDD}$.

$X_{\text{basic measurement TDDinter}} = 6$

 $T_{Measurement_Period UTRA_TDD} = 480$ ms is the period used for calculating the measurement period $T_{measurement_UTRA_TDD}$ for UTRA TDD P-CCPCH RSCP measurements.

 $T_{\text{basic_identify}_UTRA_TDD} = 800 \text{ ms}$ is the time period used in the inter RAT equation where the maximum allowed time for the UE to identify a new UTRA TDD cell is defined.

 $T_{\text{basic_measurement_UTRA_TDD}} = 50 \text{ ms}$ is the time period used in the equation for defining the measurement period for inter RAT P-CCPCH RSCP measurements.

 N_{freq} and T_{inter1} are defined in section 8.1.2.1.1

8.1.2.4.3.2 E-UTRAN TDD – UTRAN TDD measurements when DRX is used

When explicit neighbour list is provided and DRX is used the UE shall be able to identify a new detectable cell belonging to the neighbour cell list within $T_{identify,UTRA TDD}$ as shown in table 8.1.2.4.3.2-1

DRX	Tidentify_inter (s) (DRX cycles)			
cycle	Gap period =	Gap period =		
length	40 ms	80 ms		
(s)				
≤0.04	Non DRX	Non DRX		
	Requirements	Requirements		
	in section	in section		
	8.1.2.4.3.1	8.1.2.4.3.1		
	are applicable	are applicable		
0.08	3.2* N _{freq}	7.2* N _{freq}		
	(40* N _{freq})	(90* N _{freq})		
0.16	3.2* N _{freq}	7.2* N _{freq}		
	(20* N _{freq})	(45* N _{freq})		
0.32	6.4* N _{freq}	7.36* N _{freq}		
	(20* N _{freq})	(23* N _{freq})		
0.64	12.8 * N _{freq}	12.8 * N _{freq}		
	(20* N _{freq})	(20* N _{freq})		
1.28	25.6 * N _{freq}	25.6* N _{freq}		
	(20* N _{freq})	(20* N _{freq})		
2.56	51.2* N _{freg}	51.2* N _{freq}		
	(20* N _{freq})	(20* N _{freq})		

 Table 8.1.2.4.3.2-1: Requirement to identify a newly detectable UTRA TDD cell

A cell shall be considered detectable provided following conditions are fulfilled: A cell shall be considered detectable when

- P-CCPCH Ec/Io \geq -8 dB,
- DwPCH_Ec/Io \geq -5 dB.

When L3 filtering is used an additional delay can be expected.

The UE shall be capable of performing UTRA TDD P-CCPCH RSCP measurements of at least 6 UTRA cells per UTRA TDD carrier for up to 3 UTRA TDD carriers and the UE physical layer shall be capable of reporting measurements to higher layers with the measurement period defined in table 8.1.2.4.3.2-2.

DRX cycle length (s)	T _{measure_inter} (s) (DRX cycles)	
≤0.04	Non DRX	
	Requirements in	
	section 8.1.2.4.3.1	
	are applicable	
0.08	0.48*N _{freq} (6*N _{freq})	
0.16	0.8*N _{freq} (5*N _{freq})	
0.32	1.6*N _{freq} (5*N _{freq})	
0.64	3.2*N _{freq} (5*N _{freq})	
1.28	6.4*N _{freq} (5*N _{freq})	
2.56	12.8*N _{freq} (5*N _{freq})	

Table 8.1.2.4.3.2-2: Requirement to measure UTRA TDD cells

The measurement accuracy for all measured cells shall be as specified in the sub-clause 9.1.

8.1.2.4.4 E-UTRAN FDD – UTRAN TDD measurements

The requirements in section 8.1.2.4.3 also apply for this section.

8.1.2.4.5 E-UTRAN FDD – GSM measurements

8.1.2.4.5.1 E-UTRAN FDD – GSM measurements when no DRX is used

[Editor"s note: GERAN neighbour cell list requirement should be added]

The requirements in this section apply only to UE supporting E-UTRAN FDD and GSM.

Measurements on GSM cells can be requested with BSIC verified or BSIC non-verified.

In RRC_CONNECTED state when a supported transmission gap pattern sequence according to Table 8.1.2.1-1 is configured by E-UTRAN the UE shall continuously measure GSM cells, search for new GSM cells given in the monitored set and re-confirm the BSIC for already detected cells. During DRX periods the UE may use other periods of time outside the specified measurement gap patterns.

8.1.2.4.5.1.1 GSM carrier RSSI

This measurement shall be based on measurement gaps allocated for GSM carrier RSSI measurement as described in section 8.1.2.1. A UE supporting GSM measurements shall measure minimum number of 10 GSM carrier RSSI measurement samples ($N_{GSM \text{ carrier RSSI}}$) per measurement gap. In RRC_CONNECTED state the measurement period, $T_{Measurement Period, GSM}$, for the GSM carrier RSSI measurement is 480 ms.

The UE shall meet the measurement accuracy requirements stated for RXLEV in [8], when the given measurement time allows the UE to take at least 3 GSM carrier RSSI samples per GSM carrier in the monitored set during the measurement period.

In case the UE is not able to acquire the required number of samples per GSM carrier during one measurement period, when at least 25% of the monitoring gaps available for GSM monitoring purposes are used for GSM RSSI purposes the UE shall measure as many GSM carriers as possible during that measurement period using at least 3 samples per GSM carrier. The GSM carriers that were not measured during that measurement period shall be measured in the following measurement periods.

8.1.2.4.5.1.2 BSIC verification

Measurements on a GSM cell can be requested with BSIC verified or BSIC non-verified. If GSM measurements are requested with BSIC verified the UE shall be able to report the GSM cells with BSIC verified for those cells where the verification of BSIC has been successful.

If no BSIC verification is required then 100% of the measurement gaps available for GSM monitoring shall be used for GSM RSSI purposes.

The procedure for BSIC verification on a GSM cell can be divided into the following two tasks:

- **Initial BSIC identification:** Includes searching for the BSIC and decoding the BSIC for the first time when there is no knowledge about the relative timing between the E-UTRAN FDD and GSM cells. The UE shall trigger the initial BSIC identification within the available transmission gap pattern sequence. The requirements for BSIC re-confirmation can be found in section **8**,1,2,4,5,1,2,1,
- **BSIC re-confirmation:** Tracking and decoding the BSIC of a GSM cell after initial BSIC identification is performed. The UE shall trigger the BSIC re-confirmation within the available transmission gap pattern. The requirements for BSIC re-confirmation can be found in section **8.1.2.4.5.1.2.2**.

If the network requests measurements on a GSM cell with BSIC verified, the UE shall behave as follows:

- The UE shall perform GSM carrier RSSI measurements according to section 8.1.2.4.5.1 when a transmission gap pattern sequence is activated.
- The UE shall perform measurement reporting as defined in [2].
- The UE shall perform BSIC identification if BSIC verified measurements are activated by RRC. The UE shall use the most recently available GSM carrier RSSI measurement results for arranging GSM cells in signal strength order for performing BSIC identification.
- The UE shall perform BSIC re-confirmation on all the GSM cells that have been successfully identified.

- The UE shall perform all configured event evaluation for event-triggered reporting after the BSIC has been verified for a GSM cell. The UE shall use the most recently available GSM carrier RSSI measurement results in event evaluation and event-triggered reporting.
- Event-triggered and periodic reports shall be triggered according to [2].

The BSIC of a GSM cell is considered to be 'verified' if the UE has decoded the SCH of the BCCH carrier and identified the BSIC at least one time (initial BSIC identification). Once a GSM cell has been identified the BSIC shall be re-confirmed at least once every $8*T_{re-confirm,GSM}$ seconds. Otherwise the BSIC of the GSM cell is considered as "non-verified". If a transmission gap pattern sequence is deactivated by the network after BSIC has been identified or verified, the UE shall consider the BSIC as non-verified.

 $T_{identify,GSM}$ indicates the maximum time allowed for the UE to decode the unknown BSIC of the GSM cell in one GSM BCCH carrier in the initial BSIC identification procedure.

 $T_{re-confirm,GSM}$ indicates the maximum time allowed for the re-confirmation of the BSIC of one GSM cell in the BSIC re-confirmation procedure.

The UE shall be able to decode a BSIC within a transmission gap when the time difference between the middle of the received GSM synchronisation burst at the UE and the middle of the effective transmission gap is within the limits specified in table 8.1.2.4.5.

Table 8.1.2.4.5.1.2-1: The gap length and maximum time difference for BSIC verification

Gap length [ms]	Maximum time difference [µs]
6	± 2350 μs

The UE shall be able to perform BSIC verification at levels down to the reference sensitivity level or reference interference levels as specified in [9].

8.1.2.4.5.1.2.1 Initial BSIC identification

This measurement shall be made on GSM cells that are requested with BSIC verified. The measurement shall be based on the measurement gaps used for Initial BSIC identification as described in section 8.1.2.4.5.1.2

The UE shall continuously attempt to decode the BSIC of SCH on the BCCH carrier of the 8 strongest BCCH carriers of the GSM cells indicated in the Inter-RAT cell info list. The UE shall give priority for BSIC decoding attempts in decreasing signal strength order to BCCH carriers with unknown BSIC. The strongest BCCH carrier is defined as the BCCH carrier having the highest measured GSM carrier RSSI value.

If the BSIC of the GSM BCCH carrier has been successfully decoded the UE shall immediately continue BSIC identification with the next GSM BCCH carrier, in signal strength order, with unknown BSIC. The GSM cell for which the BSIC has been successfully identified shall be moved to the BSIC re-confirmation procedure.

If the UE has not successfully decoded the BSIC of the GSM BCCH carrier within T_{identify,GSM} ms, the UE shall abort the BSIC identification attempts for that GSM BCCH carrier. The UE shall continue to try to perform BSIC identification of the next GSM BCCH carrier in signal strength order. The GSM BCCH carrier for which the BSIC identification failed shall not be re-considered for BSIC identification until BSIC identification attempts have been made for all the rest of the 8 strongest GSM BCCH carriers in the monitored set with unknown BSIC.

 $T_{identify,GSM}$ values are given for a set of reference gap patterns in table 8.1.2.4.5.1.2.1-1. The requirements in the table represent the time required to guarantee at least two attempts to decode the BSIC for one GSM BCCH carrier.

Number	T _{identify,gsm} (ms)		T _{reconfirm,gsm} (ms)	
of carriers				
other	40ms gap	80ms gap	40ms gap	80ms gap
than	configuration	configuration	configuration	configuration
GSM	(ID 0)	(ID 1)	(ID 0)	(ID 1)
0	2160	5040	1920	4800

Table 8.1.2.4.5.1.2.1-1

1	[5040]	[14080]	[5040]	[13760]
2	[5040]	[17280]	[5040]	[16800]
		No		No
3	[12240]	requirement	[11880]	requirement
		No		No
4	[17280]	requirement	[16800]	requirement
		No		No
5	[17280]	requirement	[16800]	requirement

8.1.2.4.5.1.2.2 BSIC re-confirmation

The UE shall maintain the timing information of up to 8 identified GSM cells. Initial timing information is obtained from the initial BSIC identification. The timing information shall be updated every time the BSIC is decoded.

For each measurement gap used for GSM BSIC reconfirmation as described in section 8.1.2.4.5.1.2, the UE shall attempt to decode the BSIC falling within the measurement gap according to table 8.1.2.4.5.1.2.1-1. If more than one BSIC can be decoded within the same measurement gap, priority shall be given to the least recently decoded BSIC.

If the UE fails to decode the BSIC after two successive attempts or if the UE has not been able to re-confirm the BSIC for a GSM cell within $T_{re-confirm,GSM}$ seconds, the UE shall abort the BSIC re-confirmation attempts for that GSM cell. The GSM cell shall be treated as a new GSM cell with unidentified BSIC and the GSM cell shall be moved to the initial BSIC identification procedure, see section 8.1.2.4.5.1.2.1.

8.1.2.4.5.1.3 Periodic Reporting

Reported measurements in periodically triggered measurement reports shall meet the requirements in section [2].

8.1.2.4.5.1.4 Event Triggered Reporting

Reported measurements in event triggered measurement reports shall meet the requirements in section [2].

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH.

The event triggered reporting delay requirement is valid when the UE for each GSM carrier in the monitored set can take the required number of samples during the measurement period $T_{Measurement Period, GSM}$ (see section 8.1.2.4.5.1).

When no BSIC verification is required, the event triggered measurement reporting delay for a GSM carrier measured without L3 filtering shall be less than $2*T_{Measurement Period, GSM}$, where $T_{Measurement Period, GSM}$ is defined in section 8.1.2.4.5.1. When L3 filtering is used an additional delay can be expected.

When BSIC verification is required, the event triggered measurement reporting delay for a GSM cell with verified BSIC, measured without L3 filtering shall be less than $2*T_{Measurement Period, GSM}$, where $T_{Measurement Period, GSM}$ is defined in section 8.1.2.4.5.1. When L3 filtering is used an additional delay can be expected. For a GSM cell with non-verified BSIC an additional delay according to section 8.1.2.4.5.1 (Initial BSIC identification) can be expected.

8.1.2.4.5.2 E-UTRAN FDD – GSM measurements when DRX is used

The requirements in this section apply only to UE supporting E-UTRAN FDD and GSM.

Measurements on GSM cells can be requested with BSIC verified or BSIC non-verified.

In RRC_CONNECTED state when a supported transmission gap pattern sequence according to Table 8.1.2.1-1 is configured by E-UTRAN the UE shall continuously measure GSM cells, search for new GSM cells given in the monitored set and re-confirm the BSIC for already detected cells. During DRX periods the UE may use other periods of time outside the specified measurement gap patterns. The UE is not required to make measurements of GSM cells during DRX periods if a measurement gap pattern has not been configured.

8.1.2.4.5.2.1 GSM carrier RSSI

This measurement shall be based on measurement gaps allocated for GSM carrier RSSI measurement as described in section 8.1.2.1. A UE supporting GSM measurements shall measure minimum number of 10 GSM carrier RSSI measurement samples ($N_{GSM carrier RSSI}$) per DRX cycle. In RRC_CONNECTED state the measurement period, $T_{Measurement Period, GSM}$, for the GSM carrier RSSI measurement is shown in table 8.1.2.4.5.2.1-1.

DRX cycle length (s)	T _{measure,GSM} (s) (DRX cycles)
≤0.04	Non DRX
	Requirements are
	applicable
[0.08]	0.48 (6)
[0.16]	0.8 (5)
[0.32]	1.6 (5)
[0.64]	3.2 (5)
[1.28]	6.4 (5)
[2.56]	12.8 (5)

The UE shall meet the measurement accuracy requirements stated for RXLEV in [8], when the given measurement time allows the UE to take at least 3 GSM carrier RSSI samples per GSM carrier in the monitored set during the measurement period.

In case the UE is not able to acquire the required number of samples per GSM carrier during one measurement period, the UE shall measure as many GSM carriers as possible during that measurement period using at least 3 samples per GSM carrier. The GSM carriers that were not measured during that measurement period shall be measured in the following measurement periods.

8.1.2.4.5.2.2 BSIC verification

Measurements on a GSM cell can be requested with BSIC verified or BSIC non-verified. If GSM measurements are requested with BSIC verified the UE shall be able to report the GSM cells with BSIC verified for those cells where the verification of BSIC has been successful.

The procedure for BSIC verification on a GSM cell can be divided into the following two tasks:

- **Initial BSIC identification:** Includes searching for the BSIC and decoding the BSIC for the first time when there is no knowledge about the relative timing between the E-UTRAN FDD and GSM cells.
- **BSIC re-confirmation:** Tracking and decoding the BSIC of a GSM cell after initial BSIC identification is performed. The UE shall trigger the BSIC re-confirmation within the available transmission gap pattern

If the network requests measurements on a GSM cell, the UE shall behave as follows:

- The UE shall perform GSM carrier RSSI measurements according to section 8.1.2.4.5.2.1 when a transmission gap pattern sequence is activated.
- The UE shall perform measurement reporting as defined in [2].
- The UE shall perform BSIC identification if BSIC verified measurements are activated by RRC. The UE shall use the most recently available GSM carrier RSSI measurement results for arranging GSM cells in signal strength order for performing BSIC identification.
- The UE shall perform BSIC re-confirmation on all the GSM cells that have been successfully identified.
- The UE shall perform all configured event evaluation for event-triggered reporting after the BSIC has been verified for a GSM cell. The UE shall use the most recently available GSM carrier RSSI measurement results in event evaluation and event-triggered reporting.
- Event-triggered and periodic reports shall be triggered according to[2].

The BSIC of a GSM cell is considered to be 'verified' if the UE has decoded the SCH of the BCCH carrier and identified the BSIC at least one time (initial BSIC identification). Once a GSM cell has been identified the BSIC shall be re-confirmed at least once every 30 seconds. Otherwise the BSIC of the GSM cell is considered as "non-verified".

The UE shall be able to perform BSIC verification at levels down to the reference sensitivity level or reference interference levels as specified in [9].

8.1.2.4.5.2.2.1 Initial BSIC identification

This measurement shall be made on GSM cells that are requested with BSIC verified.

The UE shall make at least one attempt every 30s to decode the BSIC of SCH on the BCCH carrier of the 8 strongest BCCH carriers of the GSM cells indicated in the Inter-RAT cell info list. The UE shall give priority for BSIC decoding attempts in decreasing signal strength order to BCCH carriers with unknown BSIC. The strongest BCCH carrier is defined as the BCCH carrier having the highest measured GSM carrier RSSI value.

If the BSIC of the GSM BCCH carrier has been successfully decoded the UE shall continue BSIC identification with the next GSM BCCH carrier, in signal strength order, with unknown BSIC. The GSM cell for which the BSIC has been successfully identified shall be moved to the BSIC re-confirmation procedure.

8.1.2.4.5.2.2.2 BSIC re-confirmation

The UE shall maintain the timing information of up to 8 identified GSM cells. Initial timing information is obtained from the initial BSIC identification. The timing information shall be updated every time the BSIC is decoded.

At least every 30 seconds, the UE shall attempt to decode the BSIC of each identified GSM cell.

If the UE fails to decode the BSIC after two successive attempts or if the UE has not been able to re-confirm the BSIC for a GSM cell within 60 seconds, the UE shall abort the BSIC re-confirmation attempts for that GSM cell. The GSM cell shall be treated as a new GSM cell with unidentified BSIC and the GSM cell shall be moved to the initial BSIC identification procedure, see section 8.1.2.4.5.2.2.1.

8.1.2.4.5.2.3 Periodic Reporting

Reported measurements in periodically triggered measurement reports shall meet the requirements in section [2].

8.1.2.4.5.2.4 Event Triggered Reporting

Reported measurements in event triggered measurement reports shall meet the requirements in section [2].

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH.

The event triggered reporting delay requirement is valid when the UE for each GSM carrier in the monitored set can take the required number of samples during the measurement period $T_{Measurement Period, GSM}$ (see section 8.1.2.4.5.2.1).

When no BSIC verification is required, the event triggered measurement reporting delay for a GSM carrier measured without L3 filtering shall be less than $2*T_{Measurement Period, GSM}$, where $T_{Measurement Period, GSM}$ is defined in section 8.1.2.4.5.2.1. When L3 filtering is used an additional delay can be expected.

When BSIC verification is required, the event triggered measurement reporting delay for a GSM cell with verified BSIC, measured without L3 filtering shall be less than $2*T_{Measurement Period, GSM}$, where $T_{Measurement Period, GSM}$ is defined in section 8.1.2.4.5.2.1. When L3 filtering is used an additional delay can be expected. For a GSM cell with non-verified BSIC an additional delay according to section 8.1.2.4.5.2.1 (Initial BSIC identification) can be expected.

8.1.2.4.6 E-UTRAN TDD – GSM measurements

[Editor"s note: GERAN neighbour cell list requirement should be added]

The requirements in section 8.1.2.4.5 also apply for this section.

8.1.2.4.7 E-UTRAN FDD – UTRAN FDD measurements for SON

8.1.2.4.7.1 Identification of a new UTRA FDD cell for SON

No explicit neighbour list is provided to the UE for identifying a UTRA cell for SON. The UE shall identify and report only the strongest cell when requested by the network for the purpose of SON.

8.1.2.4.7.1.1 Requirements when no DRX is used

When no DRX is used the UE shall be able to identify a new cell within:

 $\mathbf{T}_{\text{identify, UTRA_FDD}} = \mathbf{T}_{\text{basic_identify_UTRA_FDD}} \cdot \frac{480}{\text{Tinter1}} \cdot N_{\textit{Freq}} \quad \textit{ms}$

 $T_{\text{basic_identify}_UTRA_FDD} = [300]$ ms. This is the time period used in the above equation where the maximum allowed time for the UE to identify a new UTRA FDD cell is defined.

A cell shall be considered identifiable following conditions are fulfilled:

- CPICH Ec/Io \geq [-20] dB,
- SCH_Ec/Io ≥ [-17] dB for at least one channel tap and SCH_Ec/Ior is equally divided between primary synchronisation code and secondary synchronisation code. When L3 filtering is used an additional delay can be expected.

[Editor"s note: The maximum time limit on UE for searching UTRA cell for SON in non DRX shall be introduced; details are FFS]

8.1.2.4.7.1.2 Requirements when DRX is used

[Editor"s note: The requirements in DRX are FFS. The maximum time limit on UE for searching UTRA cell for SON in DRX shall be introduced; details are FFS]

8.1.2.4.7.1.3 Reporting Delay

The UE shall not report the physical cell identity of an identifiable cell for SON as long as the reporting criteria are not fulfilled.

The reporting delay is defined as the time between the identification of the strongest cell for SON until the UE starts to transmit its physical cell identity over the Uu interface. This requirement assumes that the reporting of the physical cell identity is not delayed by other RRC signalling on the DCCH. This reporting delay excludes a delay uncertainty resulted when inserting the physical cell identity of the strongest cell for SON to the TTI of the uplink DCCH. The delay uncertainty is twice the TTI of the uplink DCCH. This reporting delay excludes any delay caused by unavailability of UL resources for UE sending the physical cell identity of the strongest cell for SON.

The reporting delay of the physical cell identity of the strongest cell for SON without L3 filtering shall be less than $T_{identify, UTRA_FDD}$ defined in section 8.1.2.4.7.1.1 and in section 8.1.2.4.7.1.2 for non DRX and DRX cases respectively. When L3 filtering is used an additional delay can be expected.

8.2 Capabilities for Support of Event Triggering and Reporting Criteria

8.2.1 Introduction

This section contains requirements on UE capabilities for support of event triggering and reporting criteria. As long as the measurement configuration does not exceed the requirements stated in section 8.x.2, the UE shall meet the performance requirements defined in section 9.

The UE can be requested to make measurements under different measurement identities defined in 3GPP TS 36.331 [2]. Each measurement identity corresponds to either event based reporting, periodic reporting or no reporting. In case of event based reporting, each measurement identity is associated with one or more events, each identified with an event identity. In case of periodic reporting, a measurement identity is associated with one periodic reporting criterion. In case of no reporting, a measurement identity is associated with one no reporting criterion.

The purpose of this section is to set some limits on the number of different event, periodic and no reporting criteria the UE may be requested to track in parallel.

8.2.2 Requirements

In this section a reporting criterion corresponds to either one event (in the case of event based reporting), or one periodic reporting criterion (in case of periodic reporting), or one no reporting criterion (in case of no reporting). For event based reporting, each instance of event, with the same or different event identities, is counted as separate reporting criterion in table 8.x.2-1.

The UE shall be able to support in parallel per category up to E_{cat} reporting criteria according to table 8.x.2-1. For the measurement categories belonging to measurements on: E-UTRA intra-frequency cells, E-UTRA inter frequency cells, and inter-RAT per supported RAT, the UE need not support more than 21 reporting criteria in total.

Table 8.2.2-1: Requirements for re	porting crite	eria per measurement category	

Measurement category	E _{cat}	Note
Intra-frequency	9	E-UTRA intra-frequency cells
Inter-frequency	7	E-UTRA inter-frequency cells
Inter-RAT (E-UTRAN FDD or TDD, UTRAN FDD,	5	Only applicable for UE with this (inter-RAT)
UTRAN TDD, GSM, cdma2000 1 x RTT and HRPD)		capability. This requirement ($E_{cat} = 5$) is per
		supported RAT.

9 Measurements performance requirements for UE

One of the key services provided by the physical layer is the measurements used to trigger or perform a multitude of functions. Both the UE and the E-UTRAN are required to perform measurements. The physical layer measurement model and a complete list of measurements is specified in TBD. The physical layer measurements for are described and defined in [4]. In this clause for each measurement the relevant requirements on the measurement period, reporting range, granularity and performance in terms of accuracy are specified.

Since the UE reference sensitivity requirements are different depending on supported band, this is noted in each case with definition of the range Io for each frequency band. Definitions of each frequency bands can be found in [5].

The accuracy requirements in this clause are applicable for AWGN radio propagation conditions and assume independent interference (noise) at each receiver antenna port.

[Editor"s Note: Requirements for multiple Tx antennas are still FFS. So far only 1Tx antenna case has been considered]

9.1 E-UTRAN measurements

- in state RRC_CONNECTED
- performing measurements with appropriate measurement gaps as defined in Section 8.1.2.1.
- that is synchronised to the cell that is measured.

The reported measurement result after layer 1 filtering shall be an estimate of the average value of the measured quantity over the measurement period. The reference point for the measurement result after layer 1 filtering is referred to as point B in the measurement model described in TBD.

The accuracy requirements in this clause are valid for the reported measurement result after layer 1 filtering. The accuracy requirements are verified from the measurement report at point D in the measurement model having the higher layer filtering disabled.

9.1.2 Intra-frequency RSRP Accuracy Requirements

9.1.2.1 Absolute RSRP Accuracy

The absolute accuracy of RSRP is defined as the RSRP measured from a cell on the same frequency as that of the serving cell.

The accuracy requirements in Table 9.1.2.1-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

Conditions defined in 36.101 Section 7.3 for reference sensitivity are fulfilled.

RSRP|dBm≥ -127 dBm for Bands 1, 4, 6, 10, 33, 34, 35, 36, 37, 38, 39, 40,

RSRP|dBm \geq -126 dBm for Bands 9,

 $RSRP|_{dBm} \ge -125 dBm$ for Bands 2, 5, 7, 11, 17,

 $RSRP|_{dBm} \ge -124 \text{ dBm}$ for Bands 3, 8, 12, 13, 14.

Parameter	Unit	nit Accuracy [dB]		Conditions ¹					
		Normal condition	Extreme condition	Bands 1, 4, 6, 10, 33, 34, 35, 36, 37, 38, 39, 40	Bands 2, 5, 7, 11, 17	Bands 3, 8, 12, 13, 14	Band 9		
				lo	lo	lo	lo		
RSRP for Ês/lot ≥	dBm	±6	±9	-	-	-	-		
-6 dB				121dBm/15kHz	119dBm/15kHz	118dBm/15kHz	120dBm/15kHz		
				70dBm/	50dBm/	50dBm/	50dBm/		
				BW _{Channel}	BW Channel	BW _{Channel}	BW _{Channel}		
RSRP for Ês/lot ≥	dBm	±8	±11	-70dBm/	-70dBm/	-70dBm/	-70dBm/		
-6 dB				BW _{Channel}	119dBm/15kHz	118dBm/15kHz	120dBm/15kHz		
				50dBm/	50dBm/	50dBm/	50dBm/		
				BW _{Channel}	BW Channel	BW _{Channel}	BW _{Channel}		

Note 1. Io is assumed to have constant EPRE across the bandwidth.

9.1.2.2 Relative Accuracy of RSRP

The relative accuracy of RSRP is defined as the RSRP measured from one cell compared to the RSRP measured from another cell on the same frequency.

The accuracy requirements in Table 9.1.2.2-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

Conditions defined in 36.101 Section 7.3 for reference sensitivity are fulfilled.

 $RSRP1,2|_{dBm} \ge -127 \text{ dBm}$ for Bands 1, 4, 6, 10, 33, 34, 35, 36, 37, 38, 39, 40,

RSRP1,2 $|_{dBm} \ge -126 \text{ dBm}$ for Bands 9,

RSRP1,2|_{dBm}≥ -125 dBm for Bands 2, 5, 7, 11, 17,

 $RSRP1,2|_{dBm} \ge -124 \text{ dBm}$ for Bands 3, 8, 12, 13, 14.

Parameter	Unit	Accura	cy [dB]		Condi	itions ¹	
		Normal condition	Extreme condition	Bands 1, 4, 6, 10, 33, 34, 35, 36, 37, 38, 39, 40	Bands 2, 5, 7, 11, 17	Bands 3, 8, 12, 13, 14	Band 9
				lo	lo	lo	lo
RSRP for Ês/lot	dBm	±2	±3	-	-	-	-
> -3 dB				121dBm/15kHz	119dBm/15kHz	118dBm/15kHz	120dBm/15kHz
				50dBm/	50dBm/	50dBm/	50dBm/
				BW _{Channel}	BW _{Channel}	BW _{Channel}	BW _{Channel}
RSRP for Ês/lot ≥	dBm	<u>±3</u>	±3	-	-	-	-
-6 dB				121dBm/15kHz	119dBm/15kHz	118dBm/15kHz	120dBm/15kHz
				50dBm/	50dBm/	50dBm/	50dBm/
				BW _{Channel}	BW _{Channel}	BW _{Channel}	BW _{Channel}

Note 1. Io is assumed to have constant EPRE across the bandwidth.

9.1.3 Inter-frequency RSRP Accuracy Requirements

9.1.3.1 Absolute RSRP Accuracy

The absolute accuracy of RSRP is defined as the RSRP measured from a cell that has different carrier frequency from the serving cell.

The accuracy requirements in Table 9.1.3.1-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

Conditions defined in 36.101 Section 7.3 for reference sensitivity are fulfilled.

RSRP|dBm≥ -127 dBm for Bands 1, 4, 6, 10, 33, 34, 35, 36, 37, 38, 39, 40,

RSRP|dBm \geq -126 dBm for Bands 9,

RSRP|dBm \ge -125 dBm for Bands 2, 5, 7, 11, 17,

RSRP|dBm≥ -124 dBm for Bands 3, 8, 12, 13, 14

Parameter	Unit	Accura	cy [dB]	Conditions ¹				
		Normal condition	Extreme condition	Bands 1, 4, 6, 10, 33, 34, 35, 36, 37, 38, 39, 40	Bands 2, 5, 7, 11, 17	Bands 3, 8, 12, 13, 14	Band 9	
				lo	lo	lo	lo	
RSRP for Ês/lot ≥	dBm	±6	<u>±9</u>	-	-	-	-	
-6 dB				121dBm/15kHz	119dBm/15kHz	118dBm/15kHz	120dBm/15kHz	
				70dBm/	70dBm/	70dBm/	70dBm/	
				BW _{Channel}	BW _{Channel}	BW _{Channel}	BW _{Channel}	
RSRP for Ês/lot ≥	dBm	±8	±11	-70dBm/	-70dBm/	-70dBm/	-70dBm/	
-6 dB				BW _{Channel}	BW _{Channel}	BW _{Channel}	BW _{Channel}	
				50dBm/	50dBm/	50dBm/	50dBm/	
				BW _{Channel}	BW _{Channel}	BW _{Channel}	BW _{Channel}	
Note 1. lo is assun	ned to h	ave constant I	EPRE across	the bandwidth.				

Table 9.1.3.1-1: RSRP Inter frequency absolute accuracy

9.1.3.2 Relative Accuracy of RSRP

The relative accuracy of RSRP in inter frequency case is defined as the RSRP measured from one cell compared to the RSRP measured from another cell on a different frequency.

The accuracy requirements in Table 9.1.3.2-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

Conditions defined in 36.101 Section 7.3 for reference sensitivity are fulfilled.

 $RSRP1|_{dBm} \ge -127 \text{ dBm if } RSRP1 \text{ is on Bands } 1, 4, 6, 10, 33, 34, 35, 36, 37, 38, 39, 40,$

 $RSRP1|_{dBm} \ge -126 dBm$ if RSRP1 is on Band 9,

 $RSRP1|_{dBm} \ge -125 dBm \text{ if } RSRP1 \text{ is on Bands } 2, 5, 7, 11, 17,$

 $RSRP1|_{dBm} \ge -124 \text{ dBm if } RSRP1 \text{ is on Bands } 3, 8, 12, 13, 14,$

RSRP2_{|dBm} ≥ -127 dBm if RSRP2 is on Bands 1, 4, 6, 10, 33, 34, 35, 36, 37, 38, 39, 40

 $RSRP2|_{dBm} \ge -126 \text{ dBm if } RSRP2 \text{ is on Band 9},$

 $RSRP2|_{dBm} \ge -125 dBm \text{ if } RSRP2 \text{ is on Bands } 2, 5, 7, 11, 17,$

 $RSRP2|_{dBm} \ge -125 dBm$ if RSRP2 is on Bands 3, 8, 12, 13, 14

$$\left| RSRP1 \right|_{dBm} - RSRP2 \Big|_{dBm} \right| \le 27 \, dB$$

| Channel 1_Io -Channel 2_Io | \leq 20 dB

Parameter Unit		Accuracy [dB]		Conditions ¹				
		Normal condition	Extreme condition	RSRP is on Bands 1, 4, 6, 10, 33, 34, 35, 36, 37, 38, 39 and 40	RSRP is on Bands 2, 5, 7, 11, 17	RSRP is on Bands 3, 8, 12, 13, 14	RSRP is on Band 9	
				lo	lo	lo	lo	
RSRP for Ês/lot	dBm			-121dBm/15kHz	-119dBm/15kHz	-118dBm/15kHz	-120dBm/15kHz	
> -6dB		±6	±6	50dBm/	50dBm/	50dBm/	50dBm/	
				BW _{Channel}	BW _{Channel}	BW _{Channel}	BW _{Channel}	

Table 9.1.3.2-1: RSRP Inter frequency relative accuracy

Note 1. Io is assumed to have constant EPRE across the bandwidth.

9.1.4 RSRP Measurement Report Mapping

The reporting range of RSRP is defined from -140 dBm to -44 dBm with 1 dB resolution.

The mapping of measured quantity is defined in Table 9.1.4-1. The range in the signalling may be larger than the guaranteed accuracy range.

Reported value	Measured quantity value	Unit
RSRP_00	RSRP < -140	dBm
RSRP_01	-140 ≤ RSRP < -139	dBm
RSRP_02	-139 ≤ RSRP < -138	dBm
RSRP_95	-46 ≤ RSRP < -45	dBm
RSRP_96	-45 ≤ RSRP < -44	dBm
RSRP_97	-44 ≤ RSRP	dBm

Table 9.1.4-1: RSRP measurement report mapping

9.1.5 Intra-frequency RSRQ Accuracy Requirements

9.1.5.1 Absolute RSRQ Accuracy

The absolute accuracy of RSRQ is defined as the RSRQ measured from a cell on the same frequency as that of the serving cell.

The accuracy requirements in Table 9.1.5.1-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

Conditions defined in 36.101 Section 7.3 for reference sensitivity are fulfilled.

RSRP|dBm≥ -127 dBm for Bands 1, 4, 6, 10, 33, 34, 35, 36, 37, 38, 39, 40,

RSRP|dBm \geq -126 dBm for Bands 9,

 $RSRP|_{dBm} \ge -125 dBm$ for Bands 2, 5, 7, 11, 17,

 $RSRP|_{dBm} \ge -124 \text{ dBm}$ for Bands 3, 8, 12, 13, 14,

Parameter	Unit	Unit Accuracy [dB]		Conditions ¹					
				condition condition	Bands 1, 4, 6, 10, 33, 34, 35, 36, 37, 38, 39, 40	Bands 2, 5, 7, 11, 17	Bands 3, 8, 12, 13, 14	Band 9	
				lo	lo	lo	lo		
RSRQ when RSRP	dBm	± 2.5	± 4	-	-	-	-		
Ês/lot > -3 dB				121dBm/15kHz	119dBm/15kHz	118dBm/15kHz	120dBm/15kHz		
				50dBm/	50dBm/	50dBm/	50dBm/		
				BW _{Channel}	BW _{Channel}	BW _{Channel}	BW _{Channel}		
RSRQ when RSRP	dBm	± 3.5	± 4	-	-	-	-		
Ês/lot ≥ -6 dB				121dBm/15kHz	119dBm/15kHz	118dBm/15kHz	120dBm/15kHz		
				50dBm/	50dBm/	50dBm/	50dBm/		
				BW _{Channel}	BW _{Channel}	BW _{Channel}	BW _{Channel}		

9.1.6 Inter-frequency RSRQ Accuracy Requirements

9.1.6.1 Absolute RSRQ Accuracy

The absolute accuracy of RSRQ is defined as the RSRQ measured from a cell that has different carrier frequency from the serving cell.

The accuracy requirements in Table 9.1.6.1-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

Conditions defined in 36.101 Section 7.3 for reference sensitivity are fulfilled.

RSRP|dBm≥ -127 dBm for Bands 1, 4, 6, 10, 33, 34, 35, 36, 37, 38, 39, 40,

RSRP|dBm \geq -126 dBm for Bands 9,

 $RSRP|_{dBm} \ge -125 dBm$ for Bands 2, 5, 7, 11, 17,

 $RSRP|_{dBm} \ge -124 \text{ dBm}$ for Bands 3, 8, 12, 13, 14.

Parameter	Unit	Accuracy [dB]		Conditions ¹			
		Normal condition	Extreme condition	Bands 1, 4, 6, 10, 33, 34, 35, 36, 37, 38, 39, 40	Bands 2, 5, 7, 11, 17	Bands 3, 8, 12, 13, 14	Bands 9
				lo	lo	lo	lo
RSRQ when RSRP	dBm	± 2.5	± 4	-	-	-	-
Ês/lot > -3 dB				121dBm/15kHz	119dBm/15kHz	118dBm/15kHz	120dBm/15kHz
				50dBm/	50dBm/	50dBm/	50dBm/
				BW Channel	BW Channel	BW _{Channel}	BW Channel
RSRQ when RSRP	dBm	± 3.5	± 4	-	-	-	-
Ês/lot ≥ -6 dB				121dBm/15kHz	119dBm/15kHz	118dBm/15kHz	120dBm/15kHz
				50dBm/	50dBm/	50dBm/	50dBm/
				BW _{Channel}	BW _{Channel}	BW _{Channel}	BW _{Channel}
Note 1. lo is assumed	Note 1. Io is assumed to have constant EPRE across the bandwidth.						

Table 9.1.6.1-1: RSRQ Inter frequency absolute accuracy

9.1.6.2 Relative Accuracy of RSRQ

The relative accuracy of RSRQ in inter frequency case is defined as the RSRQ measured from one cell compared to the RSRQ measured from another cell on a different frequency.

The accuracy requirements in Table 9.1.6.2-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

Conditions defined in 36.101 Section 7.3 for reference sensitivity are fulfilled.

 $RSRP1|_{dBm} \ge -127 \ dBm \ if \ RSRP1 \ is \ on \ Band \ 1, 4, 6, 10, 33, 34, 35, 36, 37, 38, 39, 40,$

 $\text{RSRP1}|_{\text{dBm}} \ge -126 \text{ dBm if RSRP1}$ is on Band 9,

 $RSRP1|_{dBm} \ge -125 dBm$ if RSRP1 is on Bands 2, 5, 7, 11, 17,

 $RSRP1|_{dBm} \ge -124 \text{ dBm if } RSRP1 \text{ is on Bands } 3, 8, 12, 13, 14,$

 $RSRP2|_{dBm} \ge -127 \text{ dBm if } RSRP2 \text{ is on Bands } 1, 4, 6, 10, 33, 34, 35, 36, 37, 38, 39, 40,$

 $RSRP2|_{dBm} \ge -126 dBm$ if RSRP2 is on Band 9,

 $RSRP2|_{dBm} \ge -125 dBm$ if RSRP2 is on Bands 2, 5, 7, 11, 17,

 $RSRP2|_{dBm} \ge -125 dBm$ if RSRP2 is on Bands 3, 8, 12, 13, 14

 $\left|RSRP1\right|_{dBm} - RSRP2\right|_{dBm} \le 27 dB$

| Channel 1_Io -Channel 2_Io | \leq 20 dB

Parameter	Unit	Accuracy [dB]		Conditions ¹			
		Normal condition	Extreme condition	RSRQ is on Bands 1, 4, 6, 10, 33, 34, 35, 36, 37, 38, 39, 40	RSRQ is on Bands 2, 5, 7, 11, 17	RSRQ is on Bands 3, 8, 12, 13 …	RSRQ is on Band 9
				lo	lo		
RSRQ when RSRP	dBm	± 3	± 4	-	-	-	-
Ês/lot > -3 dB				121dBm/15kH	119dBm/15kHz	118dBm/15kHz	120dBm/15kHz
				z50dBm] /	50dBm/	50dBm/	50dBm/
				BW_{Channel}	BW Channel	BW _{Channel}	BW _{Channel}
RSRQ when RSRP	dBm	± 4	± 4	-	-	-	-
Ês/lot ≥ -6 dB				121dBm/15kH	119dBm/15kHz	118dBm/15kHz	120dBm/15kHz
				z50dBm] <mark>/</mark>	50dBm/	50dBm/	50dBm/
				BW _{Channel}	BW Channel	BW _{Channel}	BW Channel
Note 1. lo is assumed	d to have	constant EF	RE across t	he bandwidth.			

Table 9.1.6.2-1: RSRQ	Inter frequenc	y relative accuracy
-----------------------	----------------	---------------------

9.1.7 RSRQ Measurement Report Mapping

The reporting range of RSRQ is defined from -19.5 dB to -3 with 0.5 dB resolution.

The mapping of measured quantity is defined in table 9.1.7-1. The range in the signalling may be larger than the guaranteed accuracy range.

Reported value	Measured quantity value	Unit			
RSRQ_00	RSRQ < -19.5	dB			
RSRQ_01	-19.5 ≤ RSRQ < -19	dB			
RSRQ_02	-19 ≤ RSRQ < -18.5	dB			
RSRQ_32	-4 ≤ RSRQ < -3.5	dB			
RSRQ_33	-3.5 ≤ RSRQ < -3	dB			
RSRQ_34	-3 ≤ RSRQ	dB			

Table 9.1.7-1: RSRQ measurement report mapping

9.1.8 Power Headroom

The power headroom (PH), expressed in dB, is defined as the difference between the nominal UE maximum transmit power and the estimated power for PUSCH transmission according to section 5.1.1.1 in TS 36.213.

9.1.8.1 Period

The reported power headroom shall be estimated over 1 subframe. The power headroom shall be estimated only in a subframe where PUSCH is transmitted.

9.1.8.2 Reporting Delay

The power headroom reporting delay is defined as the time between the end of the power headroom estimation period and the time when the UE starts transmitting the power headroom over the radio interface. The reporting delay of the power headroom shall be [0 ms], which is applicable for all configured triggering mechanisms for power headroom reporting.

9.1.8.4 Report Mapping

The power headroom reporting range is from -23 ...+40 dB. Table 9.1.8.4-1 defines the report mapping.

Reported value	Measured quantity value (dB)
POWER_HEADROOM_0	-23 ≤ PH < -22
POWER_HEADROOM_1	-22 ≤ PH < -21
POWER_HEADROOM_2	-21 ≤ PH < -20
POWER_HEADROOM_3	-20 ≤ PH < -19
POWER_HEADROOM_4	-19 ≤ PH < -18
POWER_HEADROOM_5	-18 ≤ PH < -17
POWER_HEADROOM_57	$34 \le PH < 35$
POWER_HEADROOM_58	$35 \le PH < 36$
POWER_HEADROOM_59	$36 \le PH < 37$
POWER_HEADROOM_60	37 ≤ PH < 38
POWER_HEADROOM_61	38 ≤ PH < 39
POWER_HEADROOM_62	$39 \le PH < 40$
POWER_HEADROOM_63	PH ≥ 40

9.2 UTRAN FDD Measurements

- in state RRC_CONNECTED
- performing measurements according to section 8.1.2.4.1 with appropriate measurement gaps

- that is synchronised to the cell that is measured.

The reported measurement result after layer 1 filtering shall be an estimate of the average value of the measured quantity over the measurement period. The reference point for the measurement result after layer 1 filtering is referred to as point B in the measurement model described in 3GPP TS 25.302 [6].

The accuracy requirements in this clause are valid for the reported measurement result after layer 1 filtering. The accuracy requirements are verified from the measurement report at point D in the measurement model having the layer 3 filtering disabled.

9.2.1 UTRAN FDD CPICH RSCP

NOTE: This measurement is for handover between E-UTRAN and UTRAN FDD.

The requirements in this section are valid for terminals supporting this capability.

The measurement period for RRC_CONNECTED state is specified in section 8.1.2.4.1.

In RRC_CONNECTED state the accuracy requirements shall be the same as the inter-frequency measurement accuracy requirements for FDD CPICH RSCP in 3GPP TS 25.133 [cc].

If the UE, in RRC_CONNECTED state, needs measurement gaps to perform UTRAN FDD measurements, the UTRAN FDD measurement procedure and measurement gap pattern stated in section 8.1.2.4.1 shall apply.

The reporting range and mapping specified for FDD CPICH RSCP in 3GPP TS 25.133 [cc] shall apply.

9.2.2 UTRAN FDD carrier RSSI

NOTE: This measurement is for handover between E-UTRAN and UTRAN FDD.

The requirements in this section are valid for terminals supporting this capability.

The measurement period for RRC_CONNECTED state is equal to the measurement period for FDD CPICH measurements, whose measurement period is specified in section 8.1.2.4.1.

In RRC_CONNECTED state the accuracy requirements shall be the same as the inter-frequency measurement accuracy requirements for FDD carrier RSSI in 3GPP TS 25.133 [cc.

If the UE, in RRC_CONNECTED state, needs measurement gaps to perform UTRAN FDD measurements, the UTRAN FDD measurement procedure and measurement gap pattern stated in section 8.1.2.4.1 shall apply.

The reporting range and mapping specified for FDD carrier RSSI in 3GPP TS 25.133 [cc] shall apply.

9.2.3 UTRAN FDD CPICH Ec/No

NOTE: This measurement is for handover between E-UTRAN and UTRAN FDD.

The requirements in this section are valid for terminals supporting this capability.

The measurement period for RRC_CONNECTED state is specified in section 8.1.2.4.1.

In RRC_CONNECTED state the accuracy requirements shall be the same as the inter-frequency measurement accuracy requirements for FDD CPICH Ec/No in 3GPP TS 25.133 [cc].

If the UE, in RRC_CONNECTED state, needs measurement gaps to perform UTRAN FDD measurements, the UTRAN FDD measurement procedure and measurement gap pattern stated in section 8.1.2.4.1 shall apply.

The reporting range and mapping specified for FDD CPICH Ec/No in 3GPP TS 25.133 [cc] shall apply.

9.3 UTRAN TDD Measurements

- in state RRC_CONNECTED
- performing measurements according to section 8.1.2.4.3 with appropriate measurement gaps
- that is synchronised to the cell that is measured.

The reported measurement result after layer 1 filtering shall be an estimate of the average value of the measured quantity over the measurement period. The reference point for the measurement result after layer 1 filtering is referred to as point B in the measurement model described in 3GPP TS 25.302 [6].

The accuracy requirements in this clause are valid for the reported measurement result after layer 1 filtering. The accuracy requirements are verified from the measurement report at point D in the measurement model having the layer 3 filtering disabled.

9.3.1 UTRAN TDD P-CCPCH RSCP

NOTE: This measurement is for handover between E-UTRAN and UTRAN TDD.

The requirements in this section are valid for terminals supporting this capability.

The measurement period for RRC_CONNECTED state is specified in section 8.1.2.4.3.

In RRC_CONNECTED state the accuracy requirements shall be the same as the inter-frequency measurement accuracy requirements for TDD P-CCPCH in 3GPP TS 25.123 [19].

If the UE, in RRC_CONNECTED state, needs measurement gaps to perform UTRAN TDD measurements, the UTRAN TDD measurement procedure and measurement gap pattern stated in section 8.1.2.4.3 shall apply.

The reporting range and mapping specified for TDD P-CCPCH RSCP in 3GPP TS 25.123 [19] shall apply.

9.3.2 UTRAN TDD carrier RSSI

NOTE: This measurement is for handover between E-UTRAN and UTRAN TDD.

The requirements in this section are valid for terminals supporting this capability.

The measurement period for RRC_CONNECTED state is equal to the measurement period for TDD P-CCPCH RSCP measurement, whose measurement period is specified in section 8.1.2.4.3.

In RRC_CONNECTED state the accuracy requirements shall be the same as the inter-frequency measurement accuracy requirements for TDD carrier RSSI in 3GPP TS 25.123 [19].

If the UE, in RRC_CONNECTED state, needs measurement gaps to perform UTRAN TDD measurements, the UTRAN TDD measurement procedure and measurement gap pattern stated in section 8.1.2.4.3 shall apply.

The reporting range and mapping specified for TDD carrier RSSI in 3GPP TS 25.123 [19] shall apply.

9.3.3 Void

9.4 GSM Measurements

- in state RRC_CONNECTED
- performing measurements according to section 8.1.2.4.5 with appropriate measurement gaps

- that is synchronised to the cell that is measured.

The reported measurement result after layer 1 filtering shall be an estimate of the average value of the measured quantity over the measurement period. The reference point for the measurement result after layer 1 filtering is referred to as point B in the measurement model described in 3GPP TS 25.302 [6].

The accuracy requirements in this clause are valid for the reported measurement result after layer 1 filtering. The accuracy requirements are verified from the measurement report at point D in the measurement model having the layer 3 filtering disabled.

9.4.1 GSM carrier RSSI

NOTE: This measurement is for handover between E-UTRAN and GSM.

The requirements in this section are valid for terminals supporting this capability.

The measurement period for RRC_CONNECTED state is specified in section 8.1.2.4.5.

In RRC_CONNECTED state the measurement accuracy requirements for RXLEV in TS 45.008 [8] shall apply.

If the UE, in RRC_CONNECED state, needs measurement gaps to perform GSM measurements, the GSM measurement procedure and measurement gap pattern stated in section 8.1.2.4.5 shall apply.

The reporting range and mapping specified for RXLEV in TS 45.008 [8] shall apply.

9.5 CDMA2000 1x RTT Measurements

The requirements in this clause are applicable for a UE:

- in RRC_CONNECTED state.
- synchronised to the cell that is measured.

9.5.1 CDMA2000 1x RTT Pilot Strength

NOTE: This measurement is for handover between E-UTRAN and cdma2000 1 x RTT.

The requirements in this section are valid for terminals supporting this capability.

CDMA2000 1xRTT Pilot Strength defined in sub-clause 5.1.10 of [4] shall meet the performance requirement defined in sub-clause 3.2.4 of [14] on the cdma2000 1xRTT neighbour cells indicated by the serving eNode B.

The CDMA2000 1xRTT Pilot Strength measurement reporting delay corresponding to the 90% measurement success rate shall not be larger than the $T_{basic_measurement_CDMA2000_1x} = 100$ ms.

If measurement gaps are required for CDMA2000 1xRTT Pilot Strength measurement then the time value $T_{\text{basic}_measurement_CDMA2000_1x}$ shall be appropriately scaled by multiplying it with a scale factor S_{gap} , which is based on the measurement gap pattern in use as defined in Table 9.5.1-1.

Та	ble	9.5.1	-1:	Gap	Pattern	Specific	Scale F	actor
----	-----	-------	-----	-----	---------	----------	---------	-------

Gap Pattern Id	S _{gap}
0	32/3
1	64/3

10 Measurements Performance Requirements for E-UTRAN

10.1 Received Interference Power

The measurement period shall be 100 ms.

10.1.1 Absolute accuracy requirement

Table 10.2.1-1: Received Interference Power absolute accuracy						
Paramete	r Unit	Unit Accuracy Conditions				
		[dB]	lob [dBm/180 kHz]			
lob	dBm/180	kHz ± 4	-11796			

10.1.2 Relative accuracy requirement

The relative accuracy is defined as the Received Interference Power measured at one frequency compared to the Received Interference Power measured from the same frequency at a different time.

Parameter	Unit	Accuracy	Conditions
		[dB]	lob [dBm/180 kHz]
lob	dBm/180 kHz	± 0.5	-11796
			AND for changes $\leq \pm 9.0 \text{ dB}$

10.1.3 Received Interference Power measurement report mapping

The reporting range for Received Interference Power (RIP) is from -126 ... -75 dBm.

In table 10.2.3-1 the mapping of measured quantity is defined. The range in the signalling may be larger than the guaranteed accuracy range.

	Table 10.2.3-1. Received interference Fower measurement reporting range					
Reported value	Measured quantity value	Unit				
RTWP_LEV _000	RIP < -126.0	dBm				
RTWP_LEV _001	-126.0 ≤ RIP < -125.9	dBm				
RTWP_LEV _002	-125.9 ≤ RIP < -125.8	dBm				
RTWP_LEV _509	-75.2 ≤ RIP < -75.1	dBm				
RTWP_LEV _510	-75.1 ≤ RIP < -75.0	dBm				
RTWP_LEV _511	-75.0 ≤ RIP	dBm				

Table 10.2.3-1: Received Interference Power measurement reporting range

Annex A (normative): Test Cases

A.1 Purpose of annex

A.2 Requirement classification for statistical testing

- A.2.1 Types of requirements in TS 36.133
- A.3 RRM test configurations
- A.3.1 Reference Measurement Channels
- A.3.1.1 PDSCH
- A.3.1.1.1 FDD

Table A.3.1.1.1-1: PDSCH Reference Measurement Channels for FDD

Parameter	Unit		Value				
Reference channel					[R.0 FDD]		
Channel bandwidth	MHz	1.4	3	5	10	15	20
Number of transmitter antennas					1		
Allocated resource blocks					24		
Allocated subframes per Radio Frame					10		
Modulation					QPS K		
Target Coding Rate					1/3		
Information Bit Payload							
For Sub-Frames 1,2,3,4,6,7,8,9	Bits				2088		
For Sub-Frame 5	Bits				2088		
For Sub-Frame 0	Bits				1736		
Number of Code Blocks per subframe					1		
Binary Channel Bits Per Sub-Frame							
For Sub-Frames 1,2,3,4,6,7,8,9	Bits				6624		
For Sub-Frame 5	Bits				6336		
For Sub-Frame 0	Bits				5784		
Max. Throughput averaged over 1 frame	Mbps				2.17		

Note 1: 2 symbols allocated to PDCCH for 10 MHz channel BW.

Note 2: Reference signal, synchronization signals and PBCH allocated as defined in 3GPP TS 36.211 [16].

Note 3: If necessary the information bit payload size can be adjusted to facilitate the test implementation.

A.3.1.1.2 TDD

Parameter	Unit			Va	lue		
Reference channel					[R.0		
					TDD]		
Channel bandwidth	MHz	1.4	3	5	10	15	20
Number of transmitter antennas					1		
Allocated resource blocks					24		
Allocated subframes per Radio Frame					10		
Modulation					QPS		
					K		
Target Coding Rate					1/3		
Information Bit Payload							
For Sub-Frames 4,9	Bits				2088		
For Sub-Frame 5	Bits				2088		
For Sub-Frame 0	Bits				2088		
For Sub-Frame 1, 6 (DwPTS)	Bits				1736		
Number of Code Blocks per subframe					1		
Binary Channel Bits Per Sub-Frame							
For Sub-Frames 4,9	Bits				6624		
For Sub-Frame 5	Bits				6480		
For Sub-Frame 0	Bits				5928		
For Sub-Frame 1, 6 (DwPTS)	Bits				5328		
Max. Throughput averaged over 1 frame	Mbps				1.204		
Note 1: 2 symbols allocated to PDCCH for		nnel BW					
Note 2: Reference signal, synchronization	signals and	PBCH al	located	as define	ed in 3GP	P TS 36	.211
[16].	-						
Note 3: If necessary the information bit pa	yload size c	an be adj	usted to	facilitate	e the test		
implementation.	-	-					

Table A.3.1.1.2-1: PDSCH Reference Measurement Channels for TDD

73

A.3.1.2 PCFICH/PDCCH/PHICH

A.3.1.2.1 FDD

Parameter	Unit	Valu	le
Reference channel			[R.6 FDD]
Channel bandwidth	MHz		10
Number of transmitter antennas	MHz		1
Control region OFDM symbols ^{Note1}	symbols		2
Aggregation level	CCE		8
DCI Format			Note 3
Cell ID			Note 4
Payload (without CRC)	Bits		Note 5
Note 1: The control region consists of Note 2: DCI formats are defined in 3G Note 3: DCI format shall depend upon Note 4: Cell ID shall depend upon the Note 5: Payload size shall depend upon	PP TS 36.212. the test confi test configura	ration. on.	

A.3.1.2.2 TDD

Table A.3.1.2.2-1: PCFICH/PDCCH/PHICH Reference Channel for TDD

Parameter	Unit	Value						
Reference channel		[R.6						
		TDD]						
Channel bandwidth	MHz	10						
Number of transmitter antennas	MHz	1						
Control region OFDM symbols ^{Note1}	symbols	2						
Aggregation level	CCE	8						
DCI Format		Note 3						
Cell ID		Note 4						
Payload (without CRC)	Bits	Note 5						
Note 1: The control region consists of	PCFICH, PH	CH and PDCCH.						
Note 2: DCI formats are defined in 3GF	PP TS 36.212							
Note 3: DCI format shall depend upon	Note 3: DCI format shall depend upon the test configuration.							
Note 4: Cell ID shall depend upon the								
Note 5: Payload size shall depend upo	on the test co	nfiguration.						

ETSI

A.3.2 OFDMA Channel Noise Generator (OCNG)

A.3.2.1 OCNG Patterns for FDD

A.3.2.1.1 OCNG FDD pattern 1: outer resource blocks allocation


Table A.3.2.1.1-1: OP.1 FDD: OCNG FDD Pattern 1

on	itive power level $\gamma_{_{PRB}}$ [dB]	lata
	[44] Subframe	
	9	
	ol region OFDM symbols ^{Note 2}	
	gth	
2	CP length	
9	С С	
[74]	Note 1: Each physical resource block (PRB) is assigned to The data to reach virtual UE shall be uncorrelated with da over the period of any measurement. The data shall be Q	ata from other virtual UEs
	parameter $\gamma_{_{PRB}}$ is used to scale the power of PDSCH.	
[75]	Note 2: The control region consists of PCFICH, PHICH and OFDM symbols belonging to the control region may vary	
1701		

[76] N: Normal

A.3.2.1.2 OCNG FDD pattern 2: full bandwidth allocation

Table A.3.2.1.2-1: OP.2 FDD: OCNG FDD Pattern 2

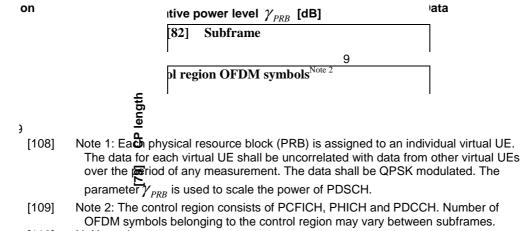


[110] N: Normal

A.3.2.2 OCNG Patterns for TDD

A.3.2.2.1 OCNG TDD pattern 1: outer resource blocks allocation

Table A.3.2.2.1-1: OP.1 TDD: OCNG TDD Pattern 1 for 5ms downlink-to-uplink switch-point periodicity

n

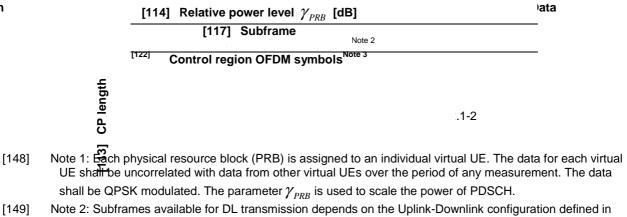


- Table 4.2-2 in 3GPP TS 36.211 [16].

 [150]

 Note 3: The control region consists of PCFICH, PHICH and PDCCH. Number of OFDM symbols belonging to
- the control region may vary between subframes.
- [151] N: Normal

Table A.3.2.2.1-2: OP.1 TDD: OCNG TDD Pattern 1 for special subframe configuration with 5ms downlink-to-uplink switch-point periodicity

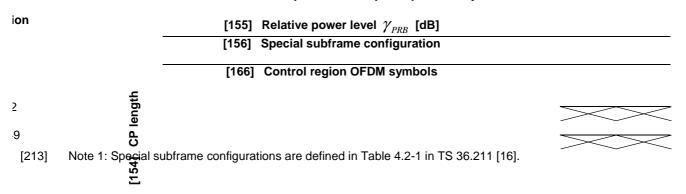

A.3.2.2.2 OCNG TDD pattern 2: full bandwidth allocation

Table A.3.2.2.2-1: OP.2 TDD: OCNG TDD Pattern 2 for 5ms downlink-to-uplink switch-point periodicity



	[217] Relative power level $\gamma_{_{PRB}}$ [dB]		Data	
	[220] Subframe			
	[225] Control region OFDM symbols			
	length	2.2-2	1	
245]	Note 1: Bech physical resource block (PRB) is assigned to an ir	ndividual virtual UE. The da	ata for each virtu	al UE


[245] Note 1: Bech physical resource block (PRB) is assigned to an individual virtual UE. The data for each virtual UE shall be uncorrelated with data from other virtual UEs over the period of any measurement. The data shall be QPSK Godulated. The parameter $\gamma_{\rm pres}$ is used to scale the power of PDSCH

QPSK \Re odulated. The parameter γ_{PRB} is used to scale the power of PDSCH. [246] Note 2: Subframes available for DL transmission depends on the Uplink-Downlink configuration in Table 4.2-2 in 3GPP TS 36.211 [16].

[248] N: Normal

^[247] Note 3: The control region consists of PCFICH, PHICH and PDCCH. Number of OFDM symbols belonging to the control region may vary between subframes.

Table A.3.2.2.2-2: OP.2 TDD: OCNG TDD Pattern 2 for special subframe configuration with 5ms downlink-to-uplink switch-point periodicity

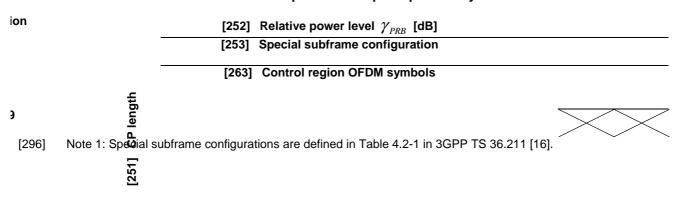

A.4 E-UTRAN RRC_IDLE state

- A.4.2 Cell Re-Selection
- A.4.2.1 E-UTRAN FDD FDD Intra frequency case

A.4.2.1.1 Test Purpose and Environment

This test is to verify the requirement for the FDD-FDD intra frequency cell reselection requirements specified in section 4.2.2.3.

The test scenario comprises of 1 E-UTRA FDD carrier and 2 cells as given in tables A.4.2.1.1-1 and A.4.2.1.1-2. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. At T1 the UE is camped on to cell 1. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

F	Parameter	Unit	Value	Comment
Initial	Active cell		Cell1	
condition	Neighbour cells		Cell2	
Final condition	Visited cell		Cell2	
-	F Channel Number		1	Only one FDD carrier frequency is used.
Channel B	andwidth (BW _{channel})	MHz	10	
Time offset	t between cells		3 ms	Asynchronous cells
Access Ba	Access Barring Information		Not Sent	No additional delays in random access procedure.
PRACH co	PRACH configuration		4	As specified in table 5.7.1-2 in 3GPP TS 36.211
DRX cycle	length	S	1.28	The value shall be used for all cells in the
_	-			test.
T1		S	15	T1 need to be defined so that cell re-
				selection reaction time is taken into
				account.
T2		S	15	T2 need to be defined so that cell re-
				selection reaction time is taken into
				account.

Table A.4.2.1.1-1: General test parameters for FDD intra frequency cell reselection test case

Parameter	Unit	C	cell 1		Cell 2	
		T1 T2		T1	T2	
E-UTRA RF Channel			1		1	
Number						
BW _{channel}	MHz		10	10		
OCNG Patterns						
defined in A.3.2.1.1		OP	.2 FDD	O	P.2 FDD	
(OP.2 FDD)						
PBCH_RA						
PBCH_RB						
PSS_RA						
SSS_RA						
PCFICH_RB						
PHICH_RA						
PHICH_RB	dB	dB 0			0	
PDCCH_RA						
PDCCH_RB						
PDSCH_RA						
PDSCH_RB						
OCNG_RA ^{Note 1}						
OCNG_RB ^{Note 1}						
Qrxlevmin	dBm	-140	-140	-140	-140	
Pcompensation	dB	0	0	0	0	
Qhysts	dB	0	0	0	0	
Qoffset _{s, n}	dB	0	0	0	0	
Cell_selection_and_						
reselection_quality_		R	SRP		RSRP	
measurement						
$\hat{\mathbf{E}}_{s}/\mathbf{I}_{ot}$	dB	2.36	-3.33	-3.33	2.36	
N _{oc}	dBm/15 kHz			-98	•	
RSRP	dBm/15 kHz	-87	-90	-90	-87	
Treselection	n s 0 0		0	0	0	
Sintrasearch	dB	No	ot sent		lot sent	
Propagation			A	ŴGN		
Condition						
Note 1: OCNG shall be	used such that bo	oth cells are	fully allocated a	nd a constan	t total	
	power spectral der					

Table A.4.2.1.1-2: Cell specific test parameters for FDD intra frequency cell reselection test case in AWGN

A.4.2.1.2 Test Requirements

The cell reselection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay can be expressed as: $T_{evaluateFDD,intra} + T_{SI}$,

Where:

T _{evaluateFDD,intra}	See Table 4.2.2.3-1 in section 4.2.2.3
T _{SI}	Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8 s in the test case.

A.4.2.2 E-UTRAN TDD – TDD Intra frequency case

A.4.2.2.1 Test Purpose and Environment

This test is to verify the requirement for the TDD-TDD intra frequency cell reselection requirements specified in section 4.2.2.3.

The test scenario comprises of 1 E-UTRA TDD carrier and 2 cells as given in tables A.4.2.2.1-1 and A.4.2.2.1-2. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. At T1 the UE is camped on to cell 1. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.4.2.2.1-1: General test parameters for TDD intra frequency cell re-selection test case

F	Parameter		Value	Comment
Initial	Active cell		Cell1	
condition	Neighbour cells		Cell2	
Final condition	Visited cell		Cell2	
E-UTRA R	F Channel Number		1	Only one TDD carrier frequency is used.
Channel Ba	andwidth (BW _{channel})	MHz	10	
Time offset	t between cells		3 μs	Synchronous cells
Access Ba	rring Information	-	Not Sent	No additional delays in random access procedure.
Special sul	oframe configuration		6	As specified in table 4.2-1 in 3GPP TS 36.211
Uplink-dow	Uplink-downlink configuration		1	As specified in table 4.2-2 in 3GPP TS 36.21
PRACH co	nfiguration index		53	As specified in table 5.7.1-3 in 3GPP TS 36.211
DRX cycle	length	S	1.28	The value shall be used for all cells in the test.
T1		S	15	T1 need to be defined so that cell re-selection
				reaction time is taken into account.
T2		S	15	T2 need to be defined so that cell re-selection
				reaction time is taken into account.

Parameter	Unit	(Cell 1		Cell 2	
		T1	T2	T1	T2	
E-UTRA RF Channel		1		1		
Number						
BW _{channel}	MHz		10		10	
OCNG Pattern						
defined in A.3.2.2.1		OF	2.2 TDD	OP	.2 TDD	
(OP.2 TDD)						
PBCH_RA						
PBCH_RB						
PSS_RA						
SSS_RA						
PCFICH_RB						
PHICH_RA						
PHICH_RB	dB		0	0		
PDCCH_RA						
PDCCH_RB						
PDSCH_RA						
PDSCH_RB						
OCNG_RA ^{Note 1}						
OCNG_RB ^{Note 1}						
Qrxlevmin	dBm		-140	-140		
Pcompensation	dB		0		0	
Qhyst _s	dB		0	0		
Qoffset _{s, n}	dB		0	0		
Cell_selection_and_		_		_		
reselection_quality_		ŀ	RSRP	RSRP		
measurement	ID	0.00	0.00	0.00	0.00	
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	dB	2.36	-3.33	-3.33	2.36	
N _{oc}	dBm/15 kHz			-98		
RSRP	dBm/15 kHz	-87	-90	-90	-87	
Treselection	S	0 0		0	0	
Sintrasearch	dB	N	ot sent		ot sent	
Propagation				ŴGN		
Condition						
Note 1: OCNG shall be	used such that bo	oth cells are	fully allocated a	ind a constant	total	
transmitted power spec	ctral density is achi	eved for all	OFDM symbols			

Table A.4.2.2.1-2: Cell specific test parameters for TDD intra frequency cell re-selection test case in AWGN

A.4.2.2.2 Test Requirements

The cell reselection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay can be expressed as: $T_{evaluateFDD,intra} + T_{SI}$,

Where:

T _{evaluateFDD,intra}	See Table 4.2.2.3-1 in section 4.2.2.3
T _{SI}	Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8 s in the test case.

A.4.2.3 E-UTRAN FDD – FDD Inter frequency case

A.4.2.3.1 Test Purpose and Environment

This test is to verify the requirement for the FDD-FDD inter-frequency cell reselection requirements specified in section 4.2.2.4.

The test scenario comprises of 2 E-UTRA FDD cells on 2 different carriers as given in tables A.4.2.3.1-1 and A.4.2.3.1-2. The test consists of two successive time periods, with time duration of T1 andT2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. At T1 the UE is camped on to cell 1. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.4.2.3.1-1: General test parameters for FDD-FDD inter frequency cell re-selection test case

	Parameter		Value	Comment				
Initial condition	Active cell		Cell2	UE shall be forced to cell 2 in the initialisation phase, so that reselection to cell 1 occurs during the first T1 phase				
T1 end	Neighbour cells		Cell1	UE shall perform reselection to cell 1 during T1				
condition	Neighbour cell		Cell2					
T2 end condition	Neighbour cell		Cell2	UE shall perform reselection to cell 2 during T2				
E-UTRA R	F Channel Number		1, 2	Two FDD carrier frequencies are used.				
Time offset	t between cells		3 ms	Asynchronous cells				
PRACH co	onfiguration		4	As specified in table 5.7.1-2 in TS 36.211				
Access Ba	Access Barring Information		ccess Barring Information		ess Barring Information		Not Sent	No additional delays in random access procedure.
DRX cycle	length	S	1.28	The value shall be used for all cells in the test.				
T1		S		T1 need to be defined so that cell re-selection reaction time is taken into account.				
T2		S	75	T2 need to be defined so that cell re-selection reaction time is taken into account.				

Parameter	Unit		Cell 1	(Cell 2	
		T1	T1 T2		T2	
E-UTRA RF Channel			1		2	
number						
BW _{channel}	MHz		10		10	
OCNG Patterns defined in						
A.3.2.1.1 (OP.2 FDD)		O	P.2 FDD	OF	P.2 FDD	
PBCH_RA	dB					
PBCH_RB	dB					
PSS_RA	dB					
SSS_RA	dB					
PCFICH_RB	dB					
PHICH_RA	dB		_		_	
PHICH_RB	dB		0		0	
PDCCH_RA	dB					
PDCCH_RB	dB					
PDSCH_RA	dB					
PDSCH_RB	dB					
OCNG_RA ^{Note 1}	dB					
OCNG_RB ^{Note 1}	dB					
Qrxlevmin	dBm		-140	-140		
N _{oc}	dBm/15 kHz		-(98		
RSRP	dBm/15 KHz	-87	-87	-100	-89	
$\hat{\mathbf{E}}_{s}/\mathbf{I}_{ot}$	dB	11	11	-2	9	
TreselectionEUTRAN	S		0		0	
Snonintrasearch	dB	Not sent		N	ot sent	
Thresh _{x, high}	dB	48			48	
Thresh _{serving, low}	dB	44			44	
Thresh _{x, low}	dB		50		50	
Propagation Condition			AW	'GN		
Note 1: OCNG shall be used	such that both ce	lls are fully a	allocated and a co	onstant total t	ransmitted	
power spectral der	sity is achieved for	or all OFDM	symbols.			

Table A.4.2.3.1-2: Cell specific test parameters for FDD-FDD inter-frequency cell reselection test case in AWGN

A.4.2.3.2 Test Requirements

The cell reselection delay to higher priority is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to higher priority shall be less than 68 s.

The cell reselection delay to lower priority is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to lower priority shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluateFDD,intra} + T_{SI}$, and to lower priority cell can be expressed as: $T_{evaluateFDD,intra} + T_{SI}$,

Where:

$T_{higher_priority_search}$	See section 4.2.2
T _{evaluateFDD,inter}	See Table 4.2.2.4-1 in section 4.2.2.4

T_{SI} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s for higher priority cell search and 7.68 s for lower priority cell search, allow 68 s for higher priority cell and 8 s for lower priority cell in the test case.

A.4.2.4 E-UTRAN FDD – TDD Inter frequency case

A.4.2.5 E-UTRAN TDD – FDD Inter frequency case

A.4.2.6 E-UTRAN TDD – TDD: Inter frequency case

A.4.2.6.1 Test Purpose and Environment

This test is to verify the requirement for the TDD-TDD inter-frequency cell reselection requirements specified in section 4.2.2.4.

The test scenario comprises of 2 E-UTRA TDD cells on 2 different carriers as given in tables A.4.2.6.1-1 and A.4.2.6.1-2. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. At T1 the UE is camped on to cell 1. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1. Furthermore, UE has not registered with network for the tracking area containing cell 2.

	Parameter		Parameter Unit Value		Value	Comment
Initial condition	Active cell		Cell2	UE shall be forced to cell 2 in the initialisation phase, so that reselection to cell 1 occurs during the first T1 phase		
T1 end	Neighbour cells		Cell1	UE shall perform reselection to cell 1 during T1		
condition	Neighbour cell		Cell2			
T2 end condition	Neighbour cell		Cell2	UE shall perform reselection to cell 2 during T2		
E-UTRA R	A RF Channel Number 1, 2		1, 2	Two TDD carrier frequencies are used.		
Time offse	t between cells		3 μs	Synchronous cells		
Access Ba	rring Information	-	Not Sent	No additional delays in random access procedure.		
Special su	bframe configuration		6	As specified in table 4.2-1 in 3GPP TS 36.211		
Uplink-dow	olink-downlink configuration		1	As specified in table 4.2-2 in 3GPP TS 36.211		
PRACH co	ACH configuration index		53	As specified in table 5.7.1-3 in 3GPP TS 36.211		
DRX cycle	DRX cycle length		1.28	The value shall be used for all cells in the test.		
T1		S	15	T1 need to be defined so that cell re-selection reaction time is taken into account.		
T2	T2		75	T2 need to be defined so that cell re-selection reaction time is taken into account.		

Table A.4.2.6.1-1: General test parameters for TDD-TDD inter frequency cell reselection test case

Parameter	Unit	C	ell 1	C	Cell 2	
		T1	T2	T1	T2	
E-UTRA RF Channel			1		2	
number						
BW _{channel}	MHz		10		10	
OCNG Pattern defined in						
A.3.2.2.1 (OP.2 TDD)		OP.	.2 TDD	OP.	.2 TDD	
PBCH_RA	dB					
PBCH_RB	dB					
PSS_RA	dB					
SSS_RA	dB					
PCFICH_RB	dB					
PHICH_RA	dB		0		0	
PHICH_RB	dB					
PDCCH_RA	dB					
PDCCH_RB	dB					
PDSCH_RA	dB					
PDSCH_RB	dB					
OCNG_RA ^{Note 1}	dB					
OCNG_RB ^{Note 1}	dB					
Qrxlevmin	dBm	-	·140	-	140	
N _{oc}	dBm/15 kHz			-98		
RSRP	dBm/15 KHz	-87	-87	-100	-89	
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	dB	11	11	-2	9	
TreselectionEUTRAN	S		0		0	
Snonintrasearch	dB	No	ot sent	No	ot sent	
Thresh _{x, high}	dB	48			48	
Thresh _{serving, low}	dB	44		44		
Thresh _{x, low}	dB		50		50	
Propagation Condition			Ą	WGN		
Note 1: OCNG shall be use	d such that both cel	ls are fully a	llocated and a	constant total t	ransmitted	
	ensity is achieved for					

Table A.4.2.6.1-2: Cell specific test parameters for TDD-TDD inter-frequency cell reselection test case in AWGN

A.4.2.6.2 Test Requirements

The cell reselection delay to higher priority is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to higher priority shall be less than 68 s.

The cell reselection delay to lower priority is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to lower priority shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluateFDD,intra} + T_{SI}$, and to lower priority cell can be expressed as: $T_{evaluateFDD,intra} + T_{SI}$,

Where:

$T_{higher_priority_search}$	See section 4.2.2
T _{evaluateFDD,inter}	See Table 4.2.2.4-1 in section 4.2.2.4

T_{SI} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s for higher priority cell search and 7.68 s for lower priority cell search, allow 68 s for higher priority cell and 8 s for lower priority cell in the test case.

A.4.3 E-UTRAN to UTRAN Cell Re-Selection

- A.4.3.1 E-UTRAN FDD UTRAN FDD:
- A.4.3.2 E-UTRAN FDD UTRAN TDD:
- A.4.3.3 E-UTRAN TDD UTRAN FDD:
- A.4.3.4 E-UTRAN TDD UTRAN TDD:
- A.4.4 E-UTRAN to GSM Cell Re-Selection
- A.4.5.1 E-UTRAN FDD GSM:
- A.4.5.2 E-UTRAN TDD GSM:

A.5 E-UTRAN RRC CONNECTED Mode Mobility

A.5.1 E-UTRAN Handover

A.5.1.1 E-UTRAN FDD - FDD Intra frequency handover

A.5.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the FDD-FDD intra frequency handover requirements specified in section 5.1.2.1.

The test scenario comprises of 1 E-UTRA FDD carrier and 2 cells as given in tables A.5.1.1.1-1 and A.5.1.1.1-2. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2.

E-UTRAN shall send a RRC message implying handover to cell 2. The RRC message implying handover shall be sent to the UE during period T2, after the UE has reported Event A3. T3 is defined as the end of the last TTI containing the RRC message implying handover.

Table A.5.1.1.1-1: General test parameters for E-UTRAN FDD-FDD intra frequency handover test case

Parameter		Unit	Value	Comment
PDSCH parameters			DL Reference Measurement Channel R.0 FDD	As specified in section A.3.1.1.1
PCFICH/PDCCH/F	PHICH parameters		DL Reference Measurement Channel R.6 FDD	As specified in section A.3.1.2.1
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
E-UTRA RF Chani	nel Number		1	Only one FDD carrier frequency is used.
Channel Bandwidt	h (BW _{channel})	MHz	10	
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		S	0	
Filter coefficient			0	L3 filtering is not used
DRX				OFF
CP length			Normal	
Access Barring Inf	ormation	-	Not Sent	No additional delays in random access procedure.
PRACH configuration			4	As specified in table 5.7.1-2 in TS 36.211
Time offset between cells			3 ms	Asynchronous cells
T1		S	5	
T2		S	≤5	
Т3		S	1	

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	Т3	T1	T2	T3
E-UTRA RF Channel			1			1	
Number							
BW _{channel}	MHz		10			10	
OCNG Patterns		OP.1	OP.1	OP.2	OP.2 FDD	OP.2 FDD	OP.1 FDD
defined in A.3.2.1.1		FDD	FDD	FDD			
(OP.1 FDD) and in							
A.3.2.1.2 (OP.2 FDD)							
PBCH_RA	dB						
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PCFICH_RB	dB						
PHICH_RA	dB						
PHICH_RB	dB		0			0	
PDCCH_RA	dB		0			0	
PDCCH_RB	dB						
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA ^{Note 1}	dB						
OCNG_RB ^{Note 1}	dB						
$\hat{\mathbf{E}}_{s}/\mathbf{I}_{ot}$	dB	8	-3.3	-3.3	-Infinity	2.36	2.36
N _{oc}	dBm/15 KHz	-98					
RSRP	dBm/15 KHz	-90	-90	-90	- Infinity	-87	-87
Propagation Condition		AWGN					
Note 1: OCNG shall be u density is ach	ised such that bo ieved for all OFD		fully allocate	d and a cons	stant total trans	mitted power s	pectral

Table A.5.1.1.1-2: Cell specific test parameters for E-UTRAN FDD-FDD intra frequency handover test case

A.5.1.1.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than [RRC procedure delay] + 35 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

A.5.1.2 E-UTRAN TDD - TDD Intra frequency handover

A.5.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the TDD-TDD intra frequency handover requirements specified in section 5.2.2.4.

The test scenario comprises of 1 E-UTRA TDD carrier and 2 cells as given in tables A.5.1.2.1-1 and A.5.1.2.1-2. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2.

E-UTRAN shall send a RRC message implying handover to cell 2. The RRC message implying handover shall be sent to the UE during period T2, after the UE has reported Event A3. T3 is defined as the end of the last TTI containing the RRC message implying handover.

Table A.5.1.2.1-1: General test parameters for E-UTRAN TDD-TDD Intra frequency handover test case

Para	ameter	Unit	Value	Comment
			DL Reference Measurement	
PDSCH parameter	S		Channel R.0 TDD	As specified in section A.3.1.1.2
			DL Reference Measurement	
PCFICH/PDCCHP	HICH parameters		Channel R.6 TDD	As specified in section A.3.1.2.2
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
E-UTRA RF Chanr	nel Number		1	Only one TDD carrier frequency is used.
Channel Bandwidth	n (BW _{channel})	MHz	10	
A3-Offset	<u> </u>	dB	0	
Hysteresis		dB	0	
Time To Trigger		S	0	
Filter coefficient			0	L3 filtering is not used
DRX				OFF
CP length			Normal	
Access Barring Info	ormation	-	Not Sent	No additional delays in random access procedure.
Special subframe of	configuration		6	As specified in table 4.2-1 in TS 36.211
Uplink-downlink co	nfiguration		1	As specified in table 4.2-2 in TS 36.211
PRACH configuration index			53	As specified in table 5.7.1-3 in TS 36.211
Time offset between cells			3 μs	Synchronous cells
T1		S	5	
T2		S	≤5	
Т3		S	1	

Parameter	Unit Cell 1				Cell 2			
		T1	T2	Т3	T1	T2	T3	
E-UTRA RF Channel			1			1		
Number								
BW _{channel}	MHz		10			10		
OCNG Patterns		OP.1	OP.1	OP.2	OP.2 TDD	OP.2 TDD	OP.1 TDD	
defined in A.3.2.1.1		TDD	TDD	TDD				
(OP.1 TDD) and in								
A.3.2.1.2 (OP.2 TDD)								
PBCH_RA	dB							
PBCH_RB	dB							
PSS_RA	dB							
SSS_RA	dB							
PCFICH_RB	dB							
PHICH_RA	dB							
PHICH_RB	dB		0			0		
PDCCH_RA	dB		0			0		
PDCCH_RB	dB							
PDSCH_RA	dB							
PDSCH_RB	dB							
OCNG_RA ^{Note 1}	dB							
OCNG_RB ^{Note 1}	dB							
\hat{E}_{s}/I_{ot}	dB	8	-3.3	-3.3	-Infinity	2.36	2.36	
N _{oc}	dBm/15 KHz				-98	·		
RSRP	dBm/15 KHz	-90	-90	-90	- Infinity	-87	-87	
Propagation Condition		AWGN						
Note 1: OCNG shall be u density is ach	ised such that bo ieved for all OFD		fully allocate	d and a con	stant total trans	mitted power s	pectral	

Table A.5.1.2.1-2: Cell specific test parameters for E-UTRAN TDD-TDD Intra frequency handover test case

A.5.1.2.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than [RRC procedure delay] + 35 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

A.5.1.3 E-UTRAN FDD – FDD Inter frequency handover

A.5.1.3.1 Test Purpose and Environment

This test is to verify the requirement for the FDD-FDD inter-frequency handover requirements specified in section 5.1.2.1.

The test scenario comprises of two E-UTRA FDD carriers and one cell on each carrier as given in tables A.5.1.3.1-1 and A.5.1.3.1-2. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 8.1.2.1-1 is configured before T2 begins to enable inter-frequency monitoring.

A RRC message implying handover shall be sent to the UE during period T2, after the UE has reported Event A3. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.5.1.3.1-1: General test parameters for E-UTRAN FDD-FDD Inter frequency handover test case

Par	ameter	Unit	Value	Comment
PDSCH parameters			DL Reference Measurement	As specified in section A.3.1.1.1
			Channel R.0 FDD	
PCFICH/PDCCH/I	PHICH parameters		DL Reference Measurement	As specified in section A.3.1.2.1
			Channel R.6 FDD	
Initial conditions	Active cell		Cell 1	Cell 1 is on RF channel number 1
	Neighbouring cell		Cell 2	Cell 2 is on RF channel number 2
Final condition	Active cell		Cell 2	
E-UTRA RF chanr	nel number		1, 2	Two FDD carriers are used
Channel Bandwidt	h (BW _{channel})	MHz	10	
Gap Pattern Id			1	As specified in 3GPP TS 36.133
				section 8.1.2.1.
A3-Offset	A3-Offset		0	
Hysteresis		dB	0	
TimeToTrigger		dB	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Non-DRX test
PRACH configurat	lion		4	As specified in table 5.7.1-2 in 3GPP TS 36.211
Access Barring Inf	ormation	-	Not sent	No additional delays in random
				access procedure
Time offset between cells			3 ms	Asynchronous cells
Gap pattern configuration Id			0	As specified in Table 8.1.2.1-1
				started before T2 starts
T1		S	5	
T2		S	≤5	
T3		S	1	

Parameter	Unit	Unit Cell 1			Cell 2			
		T1	T2	Т3	T1	T2	T3	
E-UTRA RF Channel			1		2			
number								
BW _{channel}	MHz		10			10		
OCNG Patterns		OP.1	OP.1	OP.2 FDD	OP.2	OP.2 FDD	OP.1 FDD	
defined in A.3.2.1.1		FDD	FDD		FDD			
(OP.1 FDD) and in								
A.3.2.1.2 (OP.2 FDD)								
PBCH_RA	dB							
PBCH_RB	dB							
PSS_RA	dB							
SSS_RA	dB							
PCFICH_RB	dB							
PHICH_RA	dB					-		
PHICH_RB	dB		0			0		
PDCCH_RA	dB							
PDCCH_RB	dB							
PDSCH_RA	dB							
PDSCH_RB	dB							
OCNG_RA ^{Note 1}	dB							
OCNG_RB ^{Note 1}	dB							
\hat{E}_{s}/I_{ot}	dB	4	4	4	-Infinity	y 7	7	
N_{oc}	dBm/15 kHz	-98						
RSRP	dBm/15 KHz	-94	-94	-94	-Infinity	y -91	-91	
Propagation Condition	AWGN							
Note 1: OCNG shall be u	used such that both r all OFDM symbo		fully allocate	d and a consta	nt total trans	mitted power s	pectral density	

Table A.5.1.3.1-2: Cell specific test parameters for E-UTRAN FDD-FDD Inter frequency handover test case

A.5.1.3.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than [RRC procedure delay] + 35 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

A.5.1.4 E-UTRAN TDD – TDD Inter frequency handover

A.5.1.4.1 Test Purpose and Environment

This test is to verify the requirement for the FDD-FDD intra frequency handover requirements specified in section 5.2.2.4.

The test scenario comprises of 1 E-UTRA FDD carrier and 2 cells as given in tables Table A.5.1.4.1-1 and Table A.5.1.4.1-2. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2.

E-UTRAN shall send a RRC message implying handover to cell 2. The RRC message implying handover shall be sent to the UE during period T2, after the UE has reported Event A3.

Table A.5.1.4.1-1: General test parameters for E-UTRAN TDD-TDD Inter frequency handover test case

Parameter		Unit	Value	Comment
			DL Reference Measurement	
PDSCH parameters			Channel R.0 TDD	As specified in section A.3.1.1.2
			DL Reference Measurement	
PCFICH/PDCCH/	PHICH		Channel R.6 TDD	As specified in section A.3.1.2.2
parameters				
Gap Pattern Id			1	As specified in 3GPP TS 36.133 section 8.1.2.1.
Initial conditions	Active cell		Cell 1	
	Neighbour cell		Cell 2	
Final conditions	Active cell		Cell 2	
E-UTRA RF chan	nel number		1, 2	Two TDD carriers are used
Channel Bandwid	lth (BW _{channel})	MHz	10	
A3-Offset		dB	0	
Hysteresis		dB	0	
Time to Trigger		ms	0	
Filter coefficient			0	
DRX				OFF
CP length			Normal	
Access Barring In	formation	-	Not Sent	No additional delays in random access procedure.
Special subframe	configuration		6	As specified in table 4.2-1 in 3GPP TS 36.211
Uplink-downlink configuration			1	As specified in table 4.2-2 in 3GPP TS 36.211
PRACH configuration			53	As specified in table 5.7.1-3 in 3GPP TS 36.211
Time offset betwe	en cells		3 μs	Synchronous cells
T1		S	5	
T2		S	≤5	
Т3		S	1	

Parameter	Unit		Cell 1			Cell 2	
		T1	T2	Т3	T1	T2	Т3
E-UTRA RF Channel			1			2	
number							
BW _{channel}	MHz		10			10	
OCNG Patterns		OP.1	OP.1	OP.2 FDD	OP.2	OP.2 FDD	OP.1 FDD
defined in A.3.2.1.1		FDD	FDD		FDD		
(OP.1 FDD) and in							
A.3.2.1.2 (OP.2 FDD)							
PBCH_RA	dB						
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PCFICH_RB	dB						
PHICH_RA	dB		_			_	
PHICH_RB	dB		0			0	
PDCCH_RA	dB						
PDCCH_RB	dB						
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA ^{Note 1}	dB						
OCNG_RB ^{Note 1}	dB						
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{oc}}$	dB	4	4	4	-Infinity	7	7
N_{oc}	dBm/15 kHz	-98					
RSRP	dBm/15 KHz	-94 -94 -94 -infinity -91 -9					-91
Propagation Condition	AWGN						
			Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table A.5.1.4.1-2: Cell specific test parameters for E-UTRAN TDD-TDD Inter frequency handover test case

A.5.1.4.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than [RRC procedure delay] + 35 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

A.6 RRC Connection Control

A.7 Timing and Signalling Characteristics

A.7.1 UE Transmit Timing

A.8 UE Measurements Procedures

A.8.1 E-UTRAN FDD Intra-frequency Measurements

A.8.1.1 E-UTRAN FDD-FDD intra-frequency event triggered reporting under fading propagation conditions in asynchronous cells

A.8.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the FDD intra-frequency cell search requirements in section 8.1.2.2.1.1.

The test parameters are given in Table A.8.1.1.1-1 and A.8.1.1.1-2 below. In the measurement control information it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 2.

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference Measurement	As specified in section A.3.1.1.1
		Channel R.0 FDD	
PCFICH/PDCCH/PHICH		DL Reference Measurement	As specified in section A.3.1.2.1
parameters		Channel R.6 FDD	
Active cell		Cell 1	
Neighbour cell		Cell 2	Cell to be identified.
E-UTRA RF Channel		1	One FDD carrier frequency is used.
Number			
Channel Bandwidth	MHz	10	
(BW _{channel})			
A3-Offset	dB	-3	
CP length		Normal	
Hysteresis	dB	0	
Time To Trigger	S	0	
Filter coefficient		0	L3 filtering is not used
DRX			OFF
Time offset between cells		3 ms	Asynchronous cells
T1	S	5	
T2	S	5	

Table A.8.1.1.1-1: General test parameters for E-UTRAN FDD-FDD intra-frequency event triggered reporting under fading propagation conditions in asynchronous cells

Parameter	Unit	Ce	ll 1	Cell 2		
		T1	T2	T1	T2	
E-UTRA RF Channel					1	
Number						
BW _{channel}	MHz	1	0		10	
OCNG Patterns						
defined in A.3.2.1.1		OP.1	FDD	O	P.2 FDD	
(OP.1 FDD) and in						
A.3.2.1.2 (OP.2 FDD)						
PBCH_RA	dB					
PBCH_RB	dB					
PSS_RA	dB					
SSS_RA	dB			0		
PCFICH_RB	dB					
PHICH_RA	dB	()			
PHICH_PB	dB					
PDCCH_RA	dB					
PDCCH_PB	dB					
PDSCH_RA	dB					
PDSCH_RB	dB					
OCNG_RA ^{Note 1}	dB					
OCNG_RB ^{Note 1}	dB				1	
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	dB	4	-3.79	-Infinity	1.54	
N_{oc}	dBm/15 KHz	-98				
RSRP	dBm/15 KHz	-94	-94	-Infinity	-91	
SCH_RP	dBm/15 KHz	-94	-94	-Infinity	-91	
Propagation Condition	ETU70					
Note 1: OCNG shall be u	sed such that bo	oth cells are fully	allocated and a	a constant total	transmitted	
	I density is achie					
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						

Table A.8.1.1.1-2: Cell specific test parameters for E-UTRAN FDD-FDD intra-frequency event triggered reporting under fading propagation conditions in asynchronous cells

A.8.1.1.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.1.2 E-UTRAN FDD-FDD intra-frequency event triggered reporting under fading propagation conditions in synchronous cells

A.8.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the FDD intra-frequency cell search requirements in section 8.1.2.2.1.1

The test parameters are given in Table A.8.1.2.1-1 and A.8.1.2.1-2 below. In the measurement control information it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 2.

Table A.8.1.2.1-1: General test parameters for E-UTRAN FDD-FDD intra-frequency event triggered reporting under fading propagation conditions in synchronous cells

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference Measurement Channel R.0 FDD	As specified in section A.3.1.1.1
PCFICH/PDCCH/PHICH		DL Reference Measurement	As specified in section A.3.1.2.1
parameters		Channel R.6 FDD	
Active cell		Cell 1	
Neighbour cell		Cell 2	Cell to be identified.
E-UTRA RF Channel		1	One FDD carrier frequency is used.
Number			
Channel Bandwidth	MHz	10	
(BW _{channel})			
A3-Offset	dB	-3	
CP length		Normal	
Hysteresis	dB	0	
Time To Trigger	dB	0	
Filter coefficient		0	L3 filtering is not used
DRX			OFF
Time offset between cells		3 μs	Synchronous cells
T1	S	5	
T2	S	5	

Parameter	Unit	C	Cell 1		Cell 2		
		T1	T2	T1	T2		
E-UTRA RF Channel			1		1		
Number							
BW _{channel}	MHz		10		10		
OCNG Patterns							
defined in A.3.2.1.1		OP.	1 FDD	OP.	.2 FDD		
(OP.1 FDD) and in							
A.3.2.1.2 (OP.2 FDD)							
PBCH_RA	dB						
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PCFICH_RB	dB		0	0			
PHICH_RA	dB		0				
PHICH_RB	dB						
PDCCH_RA	dB						
PDCCH_RB	dB						
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA ^{Note 1}	dB						
OCNG_RB ^{Note 1}	dB		1				
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	dB	4	-3.79	-Infinity	1.54		
N_{oc}	dBm/15 KHz	-98					
RSRP	dBm/15 KHz	-94	-94	-Infinity	-91		
SCH_RP	dBm/15 KHz	-94	-94	-Infinity	-91		
Propagation Condition				ETU70			
Note 1: OCNG shall be u	sed such that both	cells are fully a	located and a co	onstant total trans	mitted power		
spectral densi	ty is achieved for all	OFDM symbo	s.				
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.							

Table A.8.1.2.1-2: Cell specific test parameters for E-UTRAN FDD-FDD intra-frequency event triggered reporting under fading propagation conditions in synchronous cells

A.8.1.2.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.2 E-UTRAN TDD Intra-frequency Measurements

A.8.2.1 E-UTRAN TDD-TDD intra-frequency event triggered reporting under fading propagation conditions in synchronous cells

A.8.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in section 8.1.2.2.2.1.

The test parameters are given in Table A.8.2.1.1-1 and A.8.2.1.1-2 below. In the measurement control information it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 2.

Table A.8.2.1.1-1: General test parameters for E-UTRAN TDD-TDD intra-frequency event triggered reporting under fading propagation conditions in synchronous cells

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference Measurement Channel R.0 TDD	As specified in section A.3.1.1.2
PCFICH/PDCCH/PHICH parameters		DL Reference Measurement Channel R.6 TDD	As specified in section A.3.1.2.2
Active cell		Cell 1	
Neighbour cell		Cell 2	Cell to be identified.
E-UTRA RF Channel Number		1	One TDD carrier frequency is used.
Channel Bandwidth (BW _{channel})	MHz	10	
A3-Offset	dB	-3	
CP length		Normal	
Special subframe configuration		6	As specified in table 4.2-1 in TS 36.211. The same configuration in both cells
Uplink-downlink configuration		1	As specified in table 4.2-2 in TS 36.211. The same configuration in both cells
Hysteresis	dB	0	
Time To Trigger	S	0	
Filter coefficient		0	L3 filtering is not used
DRX			OFF
Time offset between cells		3 μs	Synchronous cells
T1	S	5	
T2	S	5	

Parameter	Unit	C	Cell 1		Cell 2		
		T1	T2	T1	T2		
E-UTRA RF Channel			1		1		
Number							
BW _{channel}	MHz		10		10		
OCNG Pattern defined							
in A.3.2.2.1 (OP.1		OP.	1 TDD	OP.	2 TDD		
TDD) and in A.3.2.2.2							
(OP.2)							
PBCH_RA	dB						
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PCFICH_RB	dB			0			
PHICH_RA	dB		0				
PHICH_RB	dB		0				
PDCCH_RA	dB						
PDCCH_RB	dB						
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA ^{Note 1}	dB						
OCNG_RB ^{Note 1}	dB						
N_{oc}	dBm/15 kHz			-98			
RSRP	dBm/15 kHz	-94	-94	-Infinity	-91		
\hat{E}_{s}/I_{ot}	dB	4	4	-Infinity	7		
SCH_RP	dBm/15 kHz	-94	-94	-Infinity	-91		
Propagation Condition	Propagation Condition ETU70						
Note 1: OCNG shall be u				onstant total transi	mitted power		
	ty is achieved for all						
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.							

Table A.8.2.1.1-2: Cell specific test parameters for E-UTRAN TDD-TDD intra-frequency event triggered reporting under fading propagation conditions in synchronous cells

A.8.2.1.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.3 E-UTRAN FDD - FDD Inter-frequency Measurements

A.8.3.1 E-UTRAN FDD-FDD Inter-frequency event triggered reporting under fading propagation conditions in asynchronous cells

A.8.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the FDD-FDD inter-frequency cell search requirements in section 8.1.2.3.

The test parameters are given in Tables A.8.3.1.1-1 and A.8.3.1.1-2. In this test, there are two cells on different carrier frequencies and gap pattern configuration # 0 as defined in Table 8.1.2.1-1 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 2.

Table A.8.3.1.1-1: General test parameters for E-UTRAN FDD-FDD inter-frequency event triggered reporting in fading propagation conditions

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference Measurement Channel R.0 FDD	As specified in section A.3.1.1.1
PCFICH/PDCCH/PHICH		DL Reference Measurement	As specified in section A.3.1.2.1
parameters		Channel R.6 FDD	
E-UTRA RF Channel		1, 2	Two TDD carrier frequencies are used.
Number			
Channel Bandwidth	MHz	10	
(BW _{channel})			
Active cell		Cell 1	Cell 1 is on RF channel number 1
Neighbour cell		Cell 2	Cell 2 is on RF channel number 2
Gap Pattern Id		0	As specified in 3GPP TS 36.133 section
			8.1.2.1.
A3-Offset	dB	-3	
Hysteresis	dB	0	
CP length		Normal	
TimeToTrigger	S	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF
Time offset between cells		3 ms	Asynchronous cells
T1	S	5	
T2	S	5	

Parameter	Unit	Cell 1		(Cell 2		
		T1	T2	T1	T2		
E-UTRA RF Channel			1		2		
Number							
BW _{channel}	MHz	1	0		10		
OCNG Patterns							
defined in A.3.2.1.1		OP.1	FDD	OP	P.2 FDD		
(OP.1 FDD) and in							
A.3.2.1.2 (OP.2 FDD)							
PBCH_RA	dB						
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PCFICH_RB	dB			0			
PHICH_RA	dB		_				
PHICH_RB	dB	()				
PDCCH_RA	dB						
PDCCH_RB	dB						
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA ^{Note 1}	dB						
OCNG_RB ^{Note 1}	dB						
N_{oc}	dBm/15 kHz			-98			
RSRP	dBm/15 kHz	-94	-94	-Infinity	-91		
$\mathbf{\hat{E}}_{s}/\mathbf{I}_{ot}$	dB	4	4	-Infinity	7		
SCH_RP	dBm/15 kHz	-94	-94	-Infinity	-91		
Propagation Condition			E	TU70			
Note 1: OCNG shall be u	sed such that both	cells are fully all	ocated and a co	onstant total trans	smitted power		
	ty is achieved for all						
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.							

Table A.8.3.1.1-2: Cell specific test parameters for E-UTRAN FDD-FDD inter-frequency event triggered reporting under fading propagation conditions in synchronous cells

A.8.3.1.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 3840 ms from the beginning of time period T2.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.4 E-UTRAN TDD - TDD Inter-frequency Measurements

A.8.4.1 E-UTRAN TDD-TDD Inter-frequency event triggered reporting under fading propagation conditions in synchronous cells

A.8.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD-TDD inter-frequency cell search requirements in section 8.1.2.3.4.

The test parameters are given in Table A.8.4.1.1-1 and A.8.4.1.1-2 below. In the measurement control information it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 2.

Table A.8.4.1.1-1: General test parameters for E-UTRAN TDD-TDD inter-frequency event triggered reporting in fading propagation conditions

Parameter	Unit	Value	Comment
		DL Reference Measurement	
PDSCH parameters		Channel R.0 TDD	As specified in section A.3.1.1.2
PCFICH/PDCCH/PHICH parameters		DL Reference Measurement Channel R.6 TDD	As specified in section A.3.1.2.2
Gap Pattern Id		1	As specified in 3GPP TS 36.133 section 8.1.2.1.
Special subframe configuration		6	As specified in table 4.2-1 in TS 36.211. The same configuration in both cells
Uplink-downlink configuration		1	As specified in 3GPP TS 36.211 section 4.2 Table 4.2-2
CP length		Normal	
E-UTRA RF Channel Number		1, 2	Two TDD carrier frequencies are used.
Channel Bandwidth (BW _{channel})	MHz	10	
Active cell		Cell 1	Cell 1 is on RF channel number 1
Neighbour cell		Cell 2	Cell 2 is on RF channel number 2
A3-Offset	dB	-3	
Hysteresis	dB	0	
TimeToTrigger	dB	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	
Time offset between cells		3 μs	Synchronous cells
T1	S	5	
T2	S	10	

Parameter	Unit	Cell 1		Cell 2		
		T1	T2	T1	T2	
E-UTRA RF Channel		1		2		
Number						
BW _{channel}	MHz	10		10		
OCNG Pattern defined						
in A.3.2.2.1 (OP.1		OP.1 TDD		OP.2 TDD		
TDD) and in A.3.2.2.2						
(OP.2)						
PBCH_RA	dB					
PBCH_RB	dB					
PSS_RA	dB					
SSS_RA	dB					
PCFICH_RB	dB					
PHICH_RA	dB	0		0		
PHICH_RB	dB					
PDCCH_RA	dB					
PDCCH_RB	dB					
PDSCH_RA	dB					
PDSCH_RB	dB					
OCNG_RA ^{Note 1}	dB					
OCNG_RB ^{Note 1}	dB					
${ m \hat{E}}_{ m s}/{ m I}_{ m ot}$	dB	4	4	-Infinity	7	
N_{oc}	dBm/15 kHz	-98				
RSRP	dBm/15 kHz	-94	-94	-Infinity	-91	
SCH_RP	dBm/15 kHz	-94	-94	-infinity	-91	
Propagation Condition		ETU70				
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power						
spectral density is achieved for all OFDM symbols.						
Note 2: The resources for uplink transmission are assigned to the UE priori to the start of time period T2.						

Table A.8.4.1.1-2: Cell specific test parameters for E-UTRAN TDD-TDD inter-frequency event triggered reporting under fading propagation conditions in synchronous cells

A.8.4.1.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 7680 ms from the beginning of time period T2.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.9 Measurement Performance Requirements

A.9.1 RSRP

A.9.1.1 FDD Intra frequency case

A.9.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Sections 9.1.2 and 9.1.3 for FDD intra frequency measurements.

A.9.1.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Both absolute and relative accuracy of RSRP intra frequency measurements are tested by using the parameters in Table A.9.1.1.2-1. In all test cases, Cell 1 is the serving cell and Cell 2 the target cell.

P	arameter	Unit	Tes		Tes		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
	hannel Number	N41 1				1	1	
BW _{channel}		MHz		0		0	10	
Measurement	bandwidth	n _{PRB}	22—27		22-	-27	22-	-27
	ence measurement		R.0	-	R.0	-	R.0	-
	ed in A.3.1.1.1		FDD		FDD		FDD	
PDSCH alloca	ation	n _{PRB}	13—36	-	13—36	-	13—36	-
	CH/PHICH Reference							
A.3.1.2.1	channel defined in		R.6	FDD	R.6	FDD	R.6	FDD
	ns defined in A.3.2.1.1		OP.1	OP.2	OP.1	OP.2	OP.1	OP.2
(OP.1 FDD) a FDD)	nd A.3.2.1.2 (OP.2		FDD	FDD	FDD	FDD	FDD	FDD
PBCH_RA								
PBCH_RB		1						
PSS_RA]						1
SSS_RA]						1
PCFICH_RB								1
PHICH_RA								1
PHICH_RB		dB	0	0	0	0	0	0
PDCCH_RA								1
PDCCH_RB								1
PDSCH_RA]						1
PDSCH_RB]						1
OCNG_RA ^{Note}	91							1
OCNG_RB ^{Note}	91							1
	Bands 1, 4, 6 and 10						-116	
$N_{\scriptscriptstyle oc}$ Note2	Bands 2, 5, 7 and 11	dBm/15 kHz	-106	-106	-88	-88	-114 -113 -115	
	Bands 3, 8, 13,							
	Band 9	-						
Ês/lot	Danu 9	dB	2.5	-6	2.5	-6	0.5	-5.76
L3/101	Bands 1, 4, 6 and 10		2.0	-0	2.0	-0	-113	-117
RSRP ^{Note3}	Bands 2, 5, 7 and 11	dBm/15 kHz	-100	-105	-82	-87	-111	-115
	Bands 3, 8, 13,	-					-110	-115
	Band 9						-112	-117
	Bands 1, 4, 6 and 10.							.52
lo ^{Note3}	Bands 2, 5, 7 and 11	dBm/9 MHz	-70	-70	-52	-52	-79	.52
	Bands 3, 8, 13,	1					-78	8.52
	Band 9	1).52
Propagation c		_	AW	GN	۸۱۸	'GN		/GN
			AVV		- AVV	UN		

Table A.9.1.1.2-1: RSRP\ FDD Intra frequency test parameters

subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: RSRP and lo levels have been derived from other parameters for information purposes. They are not

settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.9.1.1.3 Test Requirements

The RSRP measurement accuracy shall fulfil the requirements in sections 9.1.2 and 9.1.3.

A.9.1.2 TDD Intra frequency case

A.9.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Sections 9.1.2 and 9.1.3 for TDD intra frequency measurements.

A.9.1.2.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Both absolute and relative accuracy of RSRP intra frequency measurements are tested by using the parameters in Table A.9.1.2.2-1. In all test cases, Cell 1 is the serving cell and Cell 2 the target cell.

Doe	ameter	Unit	Tes			st 2	Test 3	
		Unit	Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
E-UTRA RF Ch	annel Number		1			1		1
BW _{channel}		MHz	1	10		0	10	
Special subfran configuration ^{Not}	ne e1		e	6	6	6	6	
Uplink/downlink	c configuration ^{Note1}		1			1		1
Measurement b		n _{PRB}	22–	-27	22-	-27	22-	-27
PDSCH Refere channel defined	nce measurement d in A.3.1.1.2		R.0 TDD	-	R.0 TDD	-	R.0 TDD	-
PDSCH allocat	ion	n _{PRB}	13—36	-	13—36	-	13—36	-
PDCCH/PCFIC Reference mea defined in A.3.1	surement channel		R.6	TDD	R.6	TDD	R.6	TDD
OCNG Patterns A.3.2.2.1 (OP.1 A.3.2.2.2 (OP.2	TDD) and		OP.1 TDD	OP.2 TDD	OP.1 TDD	OP.2 TDD	OP.1 TDD	OP.2 TDD
A.3.2.2.2 (OP.2 TDD) PBCH_RA PBCH_RB PSS_RA SSS_RA PCFICH_RB PHICH_RA PHICH_RA PDCCH_RA PDCCH_RA PDSCH_RA PDSCH_RA PDSCH_RB OCNG_RA ^{Note2} OCNG_RB ^{Note2}		dB	0	0	0	0	0	0
$N_{_{oc}}$ Note3	Bands 33, 34, 35, 36, 37, 38, 39 and 40	dBm/15 kHz	-106	-106	-88	-88	-1	16
Ês/lot		dB	2.5	-6	2.5	-6	0.5	-5.76
RSRP ^{Note4}	Bands 33, 34, 35, 36, 37, 38, 39 and 40	dBm/15 kHz	-100	-105	-82	-87	-113	-117
o ^{Note4} Bands 33, 34, 35, 36, 37, 38, 39 and 40		dBm/9 MHz	-70	-70	-52	-52	-81	.52
	ndition		AW		AW		AW	

density is achieved for all OFDM symbols. Note 3: Interference from other cells and noise sources not specified in the test is assumed to be constant over

subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 4: RSRP and lo levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 5: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.9.1.2.3 Test Requirements

The RSRP measurement accuracy shall fulfil the requirements in sections 9.1.2 and 9.1.3.

A.9.1.3 FDD—FDD Inter frequency case

A.9.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Sections 9.1.2 and 9.1.3 for FDD—FDD inter frequency measurements.

A.9.1.3.2 Test parameters

In this set of test cases the cells are on different carrier frequencies. Both absolute and relative accuracy of RSRP intra frequency measurements are tested by using the parameters in Table A.9.1.3.2-1 In all test cases, Cell 1 is the serving cell and Cell 2 the target cell. The inter frequency measurements are supported by a measurement gap.

		•				
F	Parameter	Unit		st 1		st 2
		Unit	Cell 1	Cell 2	Cell 1	Cell 2
E-UTRA RF Ch	hannel Number		1	2	1	2
BW _{channel}		MHz	10	10	10	10
Measurement g	gap configuration		0	-	0	-
Measurement I	bandwidth	n _{PRB}	22-	-27	22—27	
PDSCH Refere	ence measurement d in A.3.1.1.1		R.0 FDD	-	R.0 FDD	-
PDSCH allocat		n _{PRB}	13—36	-	13—36	-
	CH/PHICH Reference channel defined in		R.6	FDD	R.6	FDD
	s defined in A.3.2.1.1		OP.1	OP.2	OP.1	OP.2
	d A.3.2.1.2 (OP.2 FDD)		FDD	FDD	FDD	FDD
PBCH RA						
PBCH_RB						
PSS_RA						
SSS RA						
PCFICH_RB						
PHICH RA						
PHICH_RB		dB	0	0	0	0
PDCCH RA			•			Ũ
PDCCH_RB						
PDSCH_RA						
PDSCH RB						
OCNG_RANot	01					
OCNG RBNot						
	Bands 1, 4, 6 and					
	10.		-88.65	-88.65	-109	-116
$N_{_{oc}}$ Note2	Bands 2, 5, 7 and	dBm/15 kHz			-107	-114
	11 Dan da 0, 0, 40	-				
	Bands 3, 8, 13,	+			-106	-113
ê "	Band 9	5	40	10	-108	-115
Ês/lot		dB	10	10	14	-5
	Bands 1, 4, 6 and 10.			-78.65	-95	-121
RSRP ^{Note3}	Bands 2, 5, 7 and 11	dBm/15 kHz	-78.65		-93	-119
	Bands 3, 8, 13,	1			-92	-118
	Band 9	1			-94	-120
	Bands 1, 4, 6 and 10.				-67.05	-87.03
lo ^{Note3}	Bands 2, 5, 7 and	dBm/9 MHz	-49.5	-49.5	-65.05	-85.03
	11 Randa 2, 9, 12	-		-		
	Bands 3, 8, 13,	ł			-64.05	-84.03
Dropogation	Band 9		A14		-66.05	-86.03
Propagation co				/GN		'GN
specti	shall be used such that b ral density is achieved for	all OFDM symbols.				
	rence from other cells and		•			
over s fulfille	subcarriers and time and s d.	anali de modelled as	AWGIN OF a	phiohuare b		
Note 3: RSRP	and lo levels have been c		arameters fo	r informatio	n purposes.	They are
	minimum requirements ar		ig independe	ent interfere	nce and nois	se at each

Table A.9.1.3.2-1: RSRP FDD—FDD Inter frequency tes	t parameters

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.9.1.3.3 Test Requirements

The RSRP measurement accuracy shall fulfil the requirements in sections 9.1.2 and 9.1.3.

A.9.1.4 TDD—TDD Inter frequency case

A.9.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Sections 9.1.2 and 9.1.3 for TDD—TDD inter frequency measurements.

A.9.1.4.2 Test parameters

In this set of test cases the cells are on different carrier frequencies. Both absolute and relative accuracy of RSRP intra frequency measurements are tested by using the parameters in Table A.9.1.4.2-1. In all test cases, Cell 1 is the serving cell and Cell 2 the target cell. The inter frequency measurements are supported by a measurement gap.

			-		-	
Pa	rameter	Unit		st 1		st 2
	and Maria I.		Cell 1	Cell 2	Cell 1	Cell 2
E-UTRA RF Cha	nnel Number		1	2	1	2
BW _{channel}	e: Note1	MHz	10	10	10	10
Special subframe	e configuration ^{Note1}			6	e	6
Uplink-downlink o				1	1	
Measurement ga	p configuration		0	-	0	-
Measurement ba		n _{PRB}		27		-27
PDSCH Reference			R.0	-	R.0	_
channel defined i	n A.3.1.1.2		TDD		TDD	
PDSCH allocation	n	n_{PRB}	13—36	-	13—36	-
PDCCH/PCFICH	/PHICH Reference			•		
measurement cha	annel defined in		R.6	TDD	R.6	TDD
A.3.1.2.2						
	defined in A.3.2.2.1		OP.1	OP.2	OP.1	OP.2
(OP.1 TDD) and	A.3.2.2.2 (OP.2 TDD)		TDD	TDD	TDD	TDD
PBCH_RA						
PBCH_RB						
PSS_RA						
SSS_RA						
PCFICH_RB						
PHICH_RA					0	0
PHICH RB		dB	0	0		
PDCCH_RA		. GD			Ũ	Ũ
PDCCH_RB						
PDSCH_RA						
PDSCH RB						
OCNG_RA ^{Note2}						
OCNG RB ^{Note2}						
	Danda 22, 24, 25					
$N_{_{oc}}$ Note3	Bands 33, 34, 35,	dDrev /4 C tot to	00.05	00.05	400	440
00	36, 37, 38, 39 and 40	dBm/15 kHz	-88.65	-88.65	-109	-116
Ês/lot	40	dB	10	10	14	-5
L3/101	Bands 33, 34, 35,	uБ	10	10	14	-5
RSRP ^{Note4}	36, 37, 38, 39 and	dBm/15 kHz	-78.65	-78.65	-95	-121
NON!	40.		-70.00	-70.05	-35	-121
	Bands 33, 34, 35,					
Io ^{Note4}	36, 37, 38, 39 and	dBm/9 MHz	-49.5	-49.5	-67.05	-87.03
10	40		40.0	40.0	-07.00	07.00
Propagation cond	-	-	۵۱۸	/GN	AW	GN
	al subframe and uplink-	downlink configurat				
36.211.		sommin connyular		5100 - 1.∠-1 al	13 1 .2 2 11 0	
	hall be used such that b	oth cells are fully all	ocated and a	a constant to	otal transmit	ted power
	density is achieved for					ponor
	nce from other cells and		specified in t	he test is as	sumed to be	e constant
	ocarriers and time and s					
	scamers and time and s	mail be modelled as		φριοριίαιe μ		
fulfilled.		anivad frame atheres	romotore fo	r informat' -		Thou
	d lo levels have been d		arameters fo	r intormation	n purposes.	i ney are
	able parameters themse		a indonan-l-	nt interform	non and net-	o of coch
	inimum requirements ar	e specified assumin	g independe	ent interrerel	nce and hols	se at each
receiver	antenna port.					

Table A.9.1.4.2-1: RSRP TDD—TDD Inter frequency test parameters

A.9.1.4.3 Test Requirements

The RSRP measurement accuracy shall fulfil the requirements in sections 9.1.2 and 9.1.3.

A.9.2 RSRQ

A.9.2.1 FDD Intra frequency case

A.9.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Sections 9.1.5 and 9.1.6.

A.9.2.1.2 Test parameters

In this test case all cells are on the same carrier frequency. The absolute accuracy of RSRQ intra frequency measurement is tested by using the parameters in Table A.9.2.1.2-1. In all test cases, Cell 1 is the serving cell and Cell 2 the target cell.

P:	arameter	Unit		st 1		st 2	Test 3		
		Unit	Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2	
E-UTRA RF Cha	annel Number	N411-		1		1			
BW _{channel}		MHz	1	0	1	0	1	0	
Measurement ba		$n_{\scriptscriptstyle PRB}$		-27	22—27		22—27		
PDSCH Referer channel defined	ice measurement in A.3.1.1.1		R.0 FDD	-	R.0 FDD	-	R.0 FDD	-	
PDSCH allocation		n _{PRB}	13—36	-	13—36	-	13—36	-	
PDCCH/PCFICH/PHICH Reference measurement channel defined in A.3.1.2.1			R.6	FDD	R.6	FDD	R.6	FDD	
	defined in A.3.2.1.1 A.3.2.1.2 (OP.2 FDD)		OP.1 FDD	OP.2 FDD	OP.1 FDD	OP.2 FDD	OP.1 FDD	OP.2 FDD	
PBCH_RA									
PBCH_RB									
PSS_RA									
SSS_RA									
PCFICH_RB									
PHICH_RA									
PHICH_RB		dB	0	0	0	0	0	0	
PDCCH_RA									
PDCCH_RB									
PDSCH_RA									
PDSCH_RB									
OCNG_RA ^{Note1}									
OCNG_RB ^{Note1}									
$N_{\scriptscriptstyle oc}$ Note2	Bands 1, 4, 6 and 10.						-1	16	
	Bands 2, 5, 7 and 11	dBm/15 kHz	-84.76	-84.76	-103.85	-103.85	-1	14	
	Bands 3, 8, 13,						-1	13	
	Band 9						-1	15	
Ês/lot		dB	3	3	-4.7	-4.7	-5.4	-5.4	
	Bands 1, 4, 6 and 10.						-120	-120	
RSRP ^{Note3}	Bands 2, 5, 7 and 11	dBm/15 kHz	-81.76	-81.76	-106.75	-106.75	-118	-118	
	Bands 3, 8, 13,						-117	-117	
	Band 9 Bands 1, 4, 6 and						-119	-119	
RSRQ ^{Note3}	10. Bands 2, 5, 7 and	dB	-14.77	-14.77	-16.76	-16.76	-17.33	-17.3	
hong	11 Bands 3, 8, 13,				10110	10.10	11.00	11.00	
	Band 9								
	Bands 1, 4, 6 and 10.						-85	.67	
lo ^{Note3}	Bands 2, 5, 7 and 11	dBm/9 MHz	-50	-50	-73	-73	-83	.67	
	Bands 3, 8, 13,						-82	.67	
Band 9								.67	
Propagation con		-	AW	'GN	AW	'GN		'GN	
Note 1: OCNG s achieve	hall be used such that be ed for all OFDM symbols. nce from other cells and		ocated and a	a constant t		-	pectral dens	sity is	
time an	d shall be modelled as A RSRP and lo levels have	WGN of appropriate	e power for	N_{oc} to be	fulfilled.				

parameters themselves. Note 4: RSRP and RSRQ minimum requirements are specified assuming independent interference and noise at each receiver

antenna port.

A.9.2.1.3 **Test Requirements**

The RSRQ measurement accuracy shall fulfil the requirements in Sections 9.1.5 and 9.1.6.

A.9.2.2 TDD Intra frequency case

A.9.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Sections 9.1.5 and 9.1.6.

A.9.2.2.2 Test parameters

In this test case all cells are on the same carrier frequency. The absolute accuracy of RSRQ intra frequency measurement is tested by using the parameters in Table A.9.2.2.2-1. In all test cases, Cell 1 is the serving cell and Cell 2 the target cell.

P	arameter	Unit		st 1		st 2	Test 3		
		Unit	Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2	
E-UTRA RF Cha	annel Number					1	1		
BW _{channel}		MHz		0	10		10		
	e configuration ^{Note1}		(5	6		6		
Uplink-downlink	configuration ^{Note1}			1	1		1		
Measurement ba	andwidth	n _{PRB}	22-	-27	22-	27	22-	-27	
PDSCH Referer channel defined	nce measurement in A.3.1.1.2		R.0 TDD	-	R.0 TDD	-	R.0 TDD	-	
PDSCH allocation	วท	n _{PRB}	13—36	-	13—36	-	13—36	-	
PDCCH/PCFICI	H/PHICH Reference								
measurement cl	nannel defined in		R.6	TDD	R.6	TDD	R.6	TDD	
A.3.1.2.2									
OCNG Patterns	defined in A.3.2.2.1		OP.1	OP.2	OP.1	OP.2	OP.1	OP.2	
	A.3.2.2.2 (OP.2 TDD)		TDD	TDD	TDD	TDD	TDD	TDD	
PBCH RA	· · · · /		1						
PBCH_RB									
PSS RA									
SSS RA									
PCFICH RB									
				0	0	0	0	0	
PHICH_RA									
PHICH_RB		dB	0						
PDCCH_RA									
PDCCH_RB									
PDSCH_RA									
PDSCH_RB									
OCNG_RA ^{Note2}									
OCNG RB ^{Note2}									
A Noto?	Bands 33, 34, 35,								
$N_{_{oc}}$ Note3	36, 37, 38, 39 and 40	dBm/15 kHz	-84.76	-84.76	-103.85	-103.85	-1	16	
Ês/lot	1	dB	3	3	-4.7	-4.7	-5.4	-5.4	
RSRP ^{Note4}	Bands 33, 34, 35, 36, 37, 38, 39 and 40	dBm/15 kHz	-81.76	-81.76	-106.75	-106.75	-120	-120	
RSRQ ^{Note4}	Bands 33, 34, 35, 36, 37, 38, 39 and 40	dB	-14.77	-14.77	-16.76	-16.76	-17.33	-17.33	
lo ^{Note4}	Bands 33, 34, 35, 36, 37, 38, 39 and 40	dBm/9 MHz	-50	-50	-73 -73		-85.67		
Propagation cor		-		'GN		'GN		/GN	
Note 2: OCNG s achieve	cial subframe and uplink- shall be used such that be ed for all OFDM symbols. ence from other cells and	oth cells are fully all	located and a	a constant to	otal transmit	ted power s	pectral dens		

Table A.9.2.2.2-1: RSRQ TDD Intra frequency test parameters

te 3: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 4: RSRQ, RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 5: RSRP and RSRQ minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.9.2.2.3 Test Requirements

The RSRQ measurement accuracy shall fulfil the requirements in Sections 9.1.5 and 9.1.6.

A.9.2.3 FDD—FDD Inter frequency case

A.9.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Sections 9.1.5 and 9.1.6.

A.9.2.3.2 Test parameters

In this test case the two cells are on different carrier frequencies and measurement gaps are provided. Both RSRQ inter frequency absolute and relative accuracy requirements are tested by using test parameters in Table A.9.2.3.2-1. In all tests, Cell 1 is the serving cell and Cell 2 the target cell.

	Parameter	l In:4	Tes	st 1	Te	st 2	Tes	t 3
ŀ	Parameter	Unit	Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
E-UTRA RF CI	hannel Number		1	2	1	2	1	2
BW _{channel}		MHz	10	10	10	10	10	10
	gap configuration		0	-	0	-	0	-
					-			
Measurement		n _{PRB}	22—27		22-	27	22—27	
channel define	ence measurement d in A.3.1.1.1		R.0 FDD	-	R.0 FDD	-	R.0 FDD	-
PDSCH allocat		n _{PRB}	13—36	-	13—36	-	13—36	-
	CH/PHICH Reference channel defined in		R.6	FDD	R.6	FDD	R.6 F	DD
	s defined in A.3.2.1.1 nd A.3.2.1.2 (OP.2 FDD)		OP.1 FDD	OP.2 FDD	OP.1 FDD	OP.2 FDD	OP.1 FDD	OP.2 FDD
PBCH_RA								
PBCH RB								
PSS_RA								
SSS RA								
PCFICH_RB								
PHICH_RA								
		15		_	_			-
PHICH_RB		dB	0	0	0	0	0	0
PDCCH_RA								
PDCCH_RB								
PDSCH_RA								
PDSCH_RB								
OCNG_RA ^{Note1}								
OCNG_RB ^{Note1}								
_	Bands 1, 4, 6 and						110	110
A T Noto?	10.	dBm/15 kHz	-80				-119	-119
$N_{_{oc}}$ Note2	Bands 2, 5, 7 and 11			-80	-104	-104	-117	-117
	Bands 3, 8, 13,						-116	-116
	Band 9						-118	-118
Ês/lot		dB	-1.75	-1.75	-4.7	-4.7	-4.5	-4.5
20,101	Bands 1, 4, 6 and 10.						-123.50	-123.5
RSRP ^{Note3}	Bands 2, 5, 7 and	dBm/15 kHz	-81.75	-81.75	-108.70	-108.70	-121.50	-121.5
	11 Dan da 0, 0, 40						400.50	400.5
	Bands 3, 8, 13,						-120.50	-120.5
	Band 9						-122.50	-122.5
	Bands 1, 4, 6 and 10.							
RSRQ ^{Note3}	Bands 2, 5, 7 and 11	dB	-14.76	-14.76	-16.76	-16.76	-16.61	-16.61
	Bands 3, 8, 13,							
	Band 9							
	Bands 1, 4, 6 and 10.						-89.90	-89.90
lo ^{Note3}	Bands 2, 5, 7 and 11	dBm/9 MHz	-50	-50	-74.95	-74.95	-87.90	-87.90
	Bands 3, 8, 13,	1					-86.90	-86.90
	Band 9	1					-88.90	-88.90
Propagation of			۸۱۸	/GN	A1A	/GN	-00.90 AW(
Propagation co	shall be used such that b	oth colle are full					AVV	
achiev Note 2: Interfer	ved for all OFDM symbols rence from other cells and and shall be modelled as A	noise sources r	not specified	in the test i	s assumed to			-

Table A.9.2.3.2-1: RSRQ FDD—FDD Inter frequency test parameters

time and shall be modelled as AWGN of appropriate power for IV_{oc} to be fulfilled. Note 3: RSRQ, RSRP and lo levels have been derived from other parameters for information purposes. They are not settable

parameters themselves. Note 4: RSRP and RSRQ minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.9.2.3.3 Test Requirements

The RSRQ measurement accuracy shall fulfil the requirements in Sections 9.1.5 and 9.1.6.

A.9.2.4 TDD—TDD Inter frequency case

A.9.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Sections 9.1.5 and 9.1.6.

A.9.2.4.2 Test parameters

In this test case the two cells are on different carrier frequencies and measurement gaps are provided. Both RSRQ inter frequency absolute and relative accuracy requirements are tested by using test parameters in Table A.9.2.4.2-1. In all tests, Cell 1 is the serving cell and Cell 2 the target cell.

D	arameter	Unit	Tes	st 1	Tes	t 2	Test 3		
_		Unit	Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2	
E-UTRA RF Cha	annel Number		1	2	1	2	1	2	
BW _{channel}		MHz	10	10	10	10	10	10	
Measurement ga	ap configuration		6	-	6	-		-	
Special subfram	e configuration Note1		()	0		(0	
Uplink-downlink	configuration Note1			1	1			1	
Measurement ba	andwidth	n _{PRB}	22-	-27	22—	-27	22-	-27	
PDSCH Referer channel defined	nce measurement		R.0 TDD	-	R.0 TDD	-	R.0 TDD	-	
PDSCH allocation	on	$n_{\scriptscriptstyle PRB}$	13—36	-	13—36	-	13—36	-	
	H/PHICH Reference hannel defined in		R.6	TDD	R.6 T	DD	R.6	TDD	
	defined in A.3.2.2.1		OP.1	OP.2	OP.1	OP.2	OP.1	OP.2	
	A.3.2.2.2 (OP.2 TDD)		TDD	TDD	TDD	TDD	TDD	TDD	
PBCH RA	(3 2)		1						
PBCH RB									
PSS RA									
SSS RA									
PCFICH_RB									
PHICH_RA									
PHICH_RB		dB	0	0	0	0	0	0	
PDCCH_RA									
PDCCH_RB									
PDSCH_RA									
PDSCH_RB									
OCNG_RA ^{Note2}									
OCNG_RB ^{Note2}									
	Bands 33, 34, 35,								
$N_{_{oc}}$ Note3	36, 37, 38, 39 and 40	dBm/15 kHz	-80	-80	-104	-104	-119	-119	
Ês/lot		dB	-1.75	-1.75	-4.7	-4.7	-4.5	-4.5	
RSRP ^{Note4}	Bands 33, 34, 35, 36, 37, 38, 39 and 40	dBm/15 kHz	-81.75	-81.75	-108.70	- 108.70	-123.50	-123.5	
RSRQ ^{Note4}	Bands 33, 34, 35, 36, 37, 38, 39 and 40	dB	-14.76	-14.76	-16.76	-16.76	-16.61	-16.61	
lo ^{Note4}	Bands 33, 34, 35, 36, 37, 38, 39 and 40	dBm/9 MHz	-50	-50	-74.95	-74.95	-89.90	-89.90	
Propagation con	ndition	-	AW		AWO			/GN	
Note 1: For spec	cial subframe and uplink- shall be used such that bo							sity is	
achieve	ed for all OFDM symbols. ence from other cells and i								

Table A 9.2.4.2-1: RSRQ TDD—TDD Inter frequency test parameters

time and shall be modelled as AWGN of appropriate power for $\,N_{_{oc}}\,$ to be fulfilled.

Note 4: RSRQ, RSRP and lo levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 5: RSRP and RSRQ minimum requirements are specified assuming independent interference and noise at each receiver

ote 5: RSRP and RSRQ minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.9.2.4.3 Test Requirements

The RSRQ measurement accuracy shall fulfil the requirements in Sections 9.1.5 and 9.1.6.

124

Annex B (informative): Change history:

					Change History		
Date	TSG#	TSG Doc.	CR	Rev	Subject	Old	New
		RP-071037			Approved version in TSG RAN#38	-	8.0.0
2008-03	RP#39	RP-080123	2		Updates of TS36.133	8.0.0	8.1.0
		RP-080325			Updates of TS36.133	8.1.0	8.2.0
		RP-080644			E-UTRAN TDD intra frequency measurements when DRX is used	8.2.0	8.3.0
2008-09	RP#41	RP-080644	800	1	E-UTRAN TDD - UTRAN TDD measurements	8.2.0	8.3.0
2008-09	RP#41	RP-080644	012		RSRQ reporting Range		8.3.0
2008-09	RP#41	RP-080644	018	1	Interfrequency and UTRA interRAT DRX peformance requirements	8.2.0	8.3.0
2008-09	RP#41	RP-080644	020	1	Additions to UE transmit timing requirements	8.2.0	8.3.0
2008-09	RP#41	RP-080644	043		Received interference power measurement performance requirement	8.2.0	8.3.0
2008-09	RP#41	RP-080644	044		Cell Synchronization requirement for E-UTRA TDD	8.2.0	8.3.0
2008-09	RP#41	RP-080644	047		Power Headroom Requirements	8.2.0	8.3.0
2008-09	RP#41	RP-080644	048		Event Triggering and Reporting Criteria Capability Requirements	8.2.0	8.3.0
2008-09	RP#41	RP-080642	004		Correction of E-UTRAN to UTRAN TDD handover	8.2.0	8.3.0
2008-09	RP#41	RP-080642	016	1	Definition of Symbols	8.2.0	8.3.0
2008-09	RP#41	RP-080642	019	1	Idle mode requirements updates	8.2.0	8.3.0
2008-09	RP#41	RP-080642	021	1	General updates to 36.133	8.2.0	8.3.0
		RP-080642			Handover requirements for E-UTRAN to cdma200 HRPD/1x	8.2.0	8.3.0
		RP-080642			Inter-frequency and inter-RAT measurement requirements for multiple layer monitoring		8.3.0
		RP-080642		1	Side conditions for UE measurement procedures and measurement performance requirements		8.3.0
		RP-080642			Correction to cell reselection Requirement from E-UTRAN to HRPD/cdma200 1x		8.3.0
		RP-080642		1	IRAT Measurement requirements in TS 36.133		8.3.0
		RP-080713		1	Corrections to Handover requirements		8.3.0
2008-09	RP#41	RP-080713	028		Measurement reporting requirements		8.3.0
		RP-080713		2	RRC re-establishment requirements		8.3.0
		RP-080713			Correction to UE measurement requirements		8.3.0
		RP-080713			Correction for the definition of interruption time		8.3.0
		RP-080713		1	Correction to idle mode higher priority search requirements		8.3.0
		RP-080713			E-UTRAN TDD inter frequency measurement requirements		8.3.0
		RP-080713					8.3.0
		RP-080919			Introduction of 700MHz Bands 12, 14 and 17		8.4.0
		RP-080928		1	CR to 36.133 on Radio Link Failure Monitoring		8.4.0
		RP-080929		-	Correction to idle mode requirements		8.4.0
		RP-080929			Definition of out of service area		8.4.0
		RP-080929			Measurement requirements for UTRAN TDD cells in idle state		8.4.0
		RP-080929		2	Correction of Inter-RAT UTRA cell reselection requirement		8.4.0
		RP-080929			Correction of E_UTRAN cell measurement requirements in idle state		8.4.0
		RP-080930			Correction to HO Requirements		8.4.0
		RP-080931			Random access requirements		8.4.0
		RP-080932			Cell phase synchronization error for large cell		8.4.0
		RP-080932		4	Synchronization Requirements for E-UTRAN to 1xRTT and HRPD Handovers		8.4.0
		RP-080933		·	E-UTRAN TDD-TDD intra/inter frequency measurement reporting requirements		8.4.0
		RP-080933			E-UTRAN FDD – UTRAN FDD Measurement reporting requirements		8.4.0
		RP-080933			Measurement requirement for E-UTRAN TDD to UTRAN TDD/FDD when DRX is used		8.4.0
		RP-080933		<u> </u>	Interfrequency and GSM measurement performance requirements in large DRX		8.4.0
		RP-080933		1	Correction of implementation margin for transmission gap.		8.4.0
		RP-080933			Alignement of DRX cycle dependent requirements		8.4.0
		RP-080933		1	Alignement of side conditions for mobility measurements		8.4.0
		RP-080933		1	Measurement models in RRC_CONNECTED		8.4.0
		RP-080933		1	Limitation of maximum number of layers for multiple monitoring		8.4.0
		RP-080933		1	GSM Cell identification requirements for parallel monitoring		8.4.0
		RP-080933		ŀ –	UE transmit timing requirement		8.4.0
		RP-080933			Correction of TS 36.133 section 8.1.2.1.1.		8.4.0
		RP-080934			Correction to RSRQ Report Mapping		8.4.0
2008-12			86		Missing side conditions for RSRP and RSRQ		8.4.0
		RP-080935		1	Phase I RRM Test Cases		8.4.0
2008-12			80	1	Test Configuration for RRM Tests: Measurement Reference Channels and OCNG		8.4.0
		RP-080936		-	Cdma200 1xRTT Measurement Requirements		8.4.0
2008-12	RP#42	RP-080937	74	1	E-UTRA to UTRA cell search requirements for SON		8.4.0
2000-12	111 #42	11-000931	/ +	L '		0.5.0	0.4.0

125

History

Document history		
V8.2.0	November 2008	Publication
V8.3.0	November 2008	Publication
V8.4.0	January 2009	Publication