# ETSI TS 136 141 V11.9.0 (2014-07)



LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); Base Station (BS) conformance testing (3GPP TS 36.141 version 11.9.0 Release 11)



Reference RTS/TSGR-0436141vb90

Keywords

LTE

#### ETSI

#### 650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

#### Important notice

The present document can be downloaded from: http://www.etsi.org

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at http://portal.etsi.org/tb/status/status.asp

If you find errors in the present document, please send your comment to one of the following services: <u>http://portal.etsi.org/chaircor/ETSI\_support.asp</u>

#### **Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI. The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2014. All rights reserved.

**DECT<sup>™</sup>**, **PLUGTESTS<sup>™</sup>**, **UMTS<sup>™</sup>** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members. **3GPP<sup>™</sup>** and **LTE<sup>™</sup>** are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

**GSM**® and the GSM logo are Trade Marks registered and owned by the GSM Association.

# Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://ipr.etsi.org).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

# Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <u>http://webapp.etsi.org/key/queryform.asp</u>.

# Modal verbs terminology

In the present document "shall", "shall not", "should", "should not", "may", "may not", "need", "need not", "will", "will not", "can" and "cannot" are to be interpreted as described in clause 3.2 of the <u>ETSI Drafting Rules</u> (Verbal forms for the expression of provisions).

"must" and "must not" are NOT allowed in ETSI deliverables except when used in direct citation.

# Contents

Intellectual Property Rights			
Forew	Foreword2		
Moda	l verbs terminology	2	
Forew	vord	12	
1	Scope	13	
2	References	13	
3	Definitions, symbols and abbreviations		
3.1	Definitions		
3.2	Symbols		
3.3	Abbreviations	18	
4	General test conditions and declarations	19	
4.1	Measurement uncertainties and Test Requirements	20	
4.1.1	General		
4.1.2	Acceptable uncertainty of Test System		
4.1.2.1			
4.1.2.2			
4.1.2.3			
4.1.2.3	Interpretation of measurement results		
4.1.5			
	Base station classes		
4.3	Regional requirements		
4.4	Selection of configurations for testing		
4.5	BS Configurations		
4.5.1	Transmit configurations		
4.5.1.1	1		
4.5.2	Receive configurations		
4.5.2.1	Reception with multiple receiver antenna connectors, receiver diversity		
4.5.3	Duplexers		
4.5.4	Power supply options		
4.5.5	Ancillary RF amplifiers		
4.5.6	BS with integrated Iuant BS modem	35	
4.5.7	BS using antenna arrays		
4.5.7.1			
4.5.7.2			
4.6	Manufacturer"s declarations of regional and optional requirements		
4.6.1	Operating band and frequency range		
4.6.2	Channel bandwidth		
4.6.3	Base station output power		
4.6.4	Spurious emissions Category		
4.6.5	Additional operating band unwanted emissions		
4.6.6			
	Co-existence with other systems		
4.6.7	Co-location with other base stations		
4.6.8	Manufacturer's declarations of supported RF configurations		
4.7	Specified frequency range and supported channel bandwidth		
4.7.1	RF bandwidth position for multi-carrier and/or CA testing		
4.7.2	Aggregated channel bandwidth position for Contiguous CA occupied bandwidth testing		
4.8	Format and interpretation of tests		
4.9	Applicability of requirements		
4.10	Test configurations for multi-carrier and/or CA operation		
4.10.1	ETC1: Contiguous spectrum operation		
4.10.1.	1 ETC1 generation		
4.10.1.	•		
4.10.2	ETC2: Contiguous CA occupied bandwidth		
4.10.2.			
	-		

4.10.2.2	ETC2 power allocation	
4.10.3	ETC3: Non-contiguous spectrum operation	43
4.10.3.1	ETC3 generation	
4.10.3.2	ETC3 power allocation	44
4.10.3.2	4 VOID	44
4.10.4	ETC4: Multi-band test configuration for full carrier allocation	
4.10.4.1	ETC4 generation	
4.10.4.2	•	
4.10.5	ETC5: Multi-band test configuration with high PSD per carrier	
4.10.5.1	ETC5 generation	
4.10.5.2		
4.11	Applicability of test configurations	
4.12	Requirements for BS capable of multi-band operation	
5 (	Dperating bands and channel arrangement	
5.1	General	
5.2	Void	
5.3	Void	49
5.4	Void	49
5.5	Operating bands	49
5.6	Channel bandwidth	
5.7	Channel arrangement	
5.7.1	Channel spacing	
5.7.1A	CA Channel spacing	
5.7.2	Channel raster	
5.7.3	Carrier frequency and EARFCN	
5.8	Requirements for contiguous and non-contiguous spectrum	
6 T	Fransmitter characteristics	
6.1	General	57
6.1.1	E-UTRA Test Models	
6.1.1.1	E-UTRA Test Model 1.1 (E-TM1.1)	57
6.1.1.2	E-UTRA Test Model 1.2 (E-TM1.2)	
6.1.1.3	E-UTRA Test Model 2 (E-TM2)	61
6.1.1.4	E-UTRA Test Model 3.1 (E-TM3.1).	
6.1.1.5	E-UTRA Test Model 3.2 (E-TM3.2)	
6.1.1.6	E-UTRA Test Model 3.3 (E-TM3.3)	
6.1.2	Data content of Physical channels and Signals	
6.1.2.1	Reference signals	
6.1.2.2	Primary Synchronization signal	
6.1.2.3	Secondary Synchronization signal	
6.1.2.4	PBCH	
6.1.2.5	PCFICH	
6.1.2.6	PHICH.	
6.1.2.7	PDCCH	
6.1.2.8	PDSCH	
6.2	Base station output power	
6.2.1	Definition and applicability	
6.2.2	Minimum Requirement	
6.2.3	Test purpose	
6.2.4	Method of test	
6.2.4.1		
6.2.4.1 6.2.4.2	Initial conditions	
••=••	Procedure	
6.2.5	Test Requirements	
6.2.6	Home BS output power for adjacent UTRA channel protection	
6.2.6.1	Definition and applicability	
6.2.6.2	Minimum Requirement	
6.2.6.3	Test purpose	
6.2.6.4	Method of test	
6.2.6.4.1		
6.2.6.4.2		
6.2.6.5	Test Requirements	74

6.2.7	Home BS output power for adjacent E-UTRA channel protection	
6.2.7.1	Definition and applicability	
6.2.7.2	Minimum Requirement	75
6.2.7.3	Test purpose	76
6.2.7.4	Method of test	76
6.2.7.4.1	Initial conditions	76
6.2.7.4.2	Procedure	76
6.2.7.5	Test Requirements	77
6.2.8	Home BS output power for co-channel E-UTRA protection	77
6.2.8.1	Definition and applicability	
6.2.8.2	Minimum Requirement	
6.2.8.3	Test purpose	
6.2.8.4	Method of test	
6.2.8.4.1	Initial conditions	
6.2.8.4.2	Procedure	
6.2.8.5	Test Requirements	
6.3	Output power dynamics	
6.3.1	RE Power control dynamic range	
6.3.1.1	Definition and applicability	
6.3.1.2	Minimum Requirement	
6.3.1.3	Method of test	
6.3.2	Total power dynamic range	
6.3.2.1	Definition and applicability	
6.3.2.2	Minimum Requirement	
6.3.2.3	Test purpose	
6.3.2.4	Method of test	
6.3.2.4.1	Initial conditions	
6.3.2.4.2	Procedure	
6.3.2.5	Test Requirement	
6.4	Transmit ON/OFF power	
6.4.1	Transmitter OFF power	
6.4.1.1	Definition and applicability	
6.4.1.2	Minimum Requirement	
6.4.1.3	Test purpose	
6.4.1.4	Method of test	
6.4.1.4.1	Void	
6.4.1.4.2	Void	
6.4.1.5	Test requirement	
6.4.2	Transmitter transient period	
6.4.2.1	Definition and applicability	
6.4.2.2	Minimum Requirement	
6.4.2.3	Test purpose	
6.4.2.4	Method of test	
6.4.2.4.1	Initial conditions	
6.4.2.4.2	Procedure	
6.4.2.5	Test requirement	
6.5	Transmitted signal quality	
6.5.1		
6.5.1.1	Frequency error Definition and applicability	
6.5.1.2	Minimum Requirement	
6.5.1.3	1	
	Test purpose	
6.5.1.4 6.5.1.5	Method of test	
6.5.1.5 6.5.2	Test requirement	
6.5.2 6.5.2.1	Error Vector Magnitude	
6.5.2.1	Definition and applicability	
	Minimum Requirement	
6.5.2.3	Test purpose	
6.5.2.4	Method of test	
6.5.2.4.1	Initial conditions	
6.5.2.4.2	Procedure	
6.5.2.5	Test requirement	
6.5.3	Time alignment error	86

6.5.3.1	Definition and applicability	
6.5.3.2	Minimum Requirement	
6.5.3.3	Test Purpose	86
6.5.3.4	Method of Test	86
6.5.3.4.1	Initial Conditions	86
6.5.3.4.2	Procedure	
6.5.3.5	Test Requirement	87
6.5.4	DL RS power	87
6.5.4.1	Definition and applicability	87
6.5.4.2	Minimum Requirement	87
6.5.4.3	Test purpose	
6.5.4.4	Method of test	88
6.5.4.4.1	Initial conditions	88
6.5.4.4.2	Procedure	
6.5.4.5	Test requirement	
6.6	Unwanted emissions	
6.6.1	Occupied bandwidth	
6.6.1.1	Definition and applicability	
6.6.1.2	Minimum Requirements	
6.6.1.3	Test purpose	
6.6.1.4	Method of test	
6.6.1.4.1	Initial conditions	
6.6.1.4.2	Procedure	
6.6.1.5	Test requirements	
6.6.2	Adjacent Channel Leakage power Ratio (ACLR)	
6.6.2.1	Definition and applicability	
6.6.2.2	Minimum Requirement	
6.6.2.3	Test purpose	
6.6.2.4	Method of test	
6.6.2.4.1	Initial conditions	
6.6.2.4.2	Procedure	
6.6.2.5	Test Requirement	
6.6.2.6	Cumulative ACLR test requirement in non-contiguous spectrum	
6.6.3	Operating band unwanted emissions	
6.6.3.1	Definition and applicability	
6.6.3.2	Minimum Requirement	
6.6.3.3	Test purpose	
6.6.3.4	Method of test	
6.6.3.4.1	Initial conditions	
6.6.3.4.2	Procedure	
6.6.3.5	Test requirement	
6.6.3.5.1	Test requirements for Wide Area BS (Category A)	
6.6.3.5.2	Test requirements for Wide Area BS (Category B)	
6.6.3.5.2.1		
6.6.3.5.2.2		
6.6.3.5.2A		
6.6.3.5.2B 6.6.3.5.2C		
6.6.3.5.2C		
6.6.4	Additional requirements Transmitter spurious emissions	
6.6.4.1	1	
6.6.4.2	Definition and applicability Minimum Requirements	
6.6.4.3	Test Purpose	
6.6.4.4	Method of Test	
6.6.4.4.1	Initial conditions	
6.6.4.4.2	Procedure	
6.6.4.5	Test requirements	
6.6.4.5.1	Spurious emissions (Category A)	
6.6.4.5.2	Spurious emissions (Category A)	
6.6.4.5.3	Protection of the BS receiver of own or different BS	
6.6.4.5.4	Co-existence with other systems in the same geographical area	
6.6.4.5.5	Co-location with other base stations	

6.7	Transmitter intermodulation	135
6.7.1	Definition and applicability	
6.7.2	Minimum Requirement	
6.7.2A		
6.7.3	Test purpose	
6.7.4	Method of test	
6.7.4.1		
6.7.4.2	Procedures	
6.7.5	Test Requirements	
6.7.6	Additional test requirements for Band 41	
7	Receiver characteristics	137
7.1	General	
7.2	Reference sensitivity level	
7.2.1	Definition and applicability	
7.2.2	Minimum Requirement	
7.2.3	Test purpose	
7.2.4	Method of testing	
7.2.4.1	•	
7.2.4.2		
7.2.5	Test requirement	
7.3	Dynamic range	
7.3.1	Definition and applicability	
7.3.2	Minimum Requirement	
7.3.3	Test purpose	
7.3.4	Method of testing	
7.3.4.1	Initial conditions	
7.3.4.2	Procedure	
7.3.5	Test Requirements	
7.4	In-channel selectivity	
7.4.1	Definition and applicability	
7.4.2	Minimum Requirement	
7.4.3	Test purpose	
7.4.4	Method of testing	
7.4.4.1		
7.4.4.2		
7.4.5	Test Requirements	
7.5	Adjacent Channel Selectivity (ACS) and narrow-band blocking	
7.5.1	Definition and applicability	
7.5.2 7.5.3	Minimum Requirement Test purpose	
7.5.3	Method of test	
7.5.4.1		
7.5.4.1		
7.5.4.2		
7.5.4.5	Test Requirements	
7.6	Blocking	
7.6.1	Definition and applicability	
7.6.2	Minimum Requirements	
7.6.3	Test purpose	
7.6.4	Method of test	
7.6.4.1		
7.6.4.2		
7.6.5	Test Requirements	
7.6.5.1		
7.6.5.2		
7.7	Receiver spurious emissions	
7.7.1	Definition and applicability	
7.7.2	Minimum Requirements	
7.7.3	Test purpose	
7.7.4	Method of test	
7.7.4.1	Initial conditions	

7.7.4.2	Procedure	164
7.7.5	Test requirements	
7.8	Receiver intermodulation	
7.8.1	Definition and applicability	
7.8.2	Minimum Requirement.	
7.8.3	Test purpose	
7.8.4	Method of test	
7.8.4.1		
7.8.4.1	Initial conditions	
	Procedures	
7.8.5	Test requirements	
8 Pe	rformance requirement	
8.1	General	
8.2	Performance requirements for PUSCH	
8.2.1	Performance requirements of PUSCH in multipath fading propagation conditions transmission or	
0.2.1	single antenna port	
8.2.1.1	Definition and applicability	
8.2.1.2	Minimum Requirement	
8.2.1.2		
8.2.1.3	Test Purpose Method of test	
8.2.1.4.1	Initial Conditions	
8.2.1.4.2	Procedure	
8.2.1.5	Test Requirement	
8.2.1A	Performance requirements of PUSCH in multipath fading propagation conditions transmission or	
	two antenna ports	
8.2.1A.1	Definition and applicability	
8.2.1A.2	Minimum Requirement	
8.2.1A.3	Test Purpose	180
8.2.1A.4	Method of test	
8.2.1A.4.	1 Initial Conditions	
8.2.1A.4.	2 Procedure	
8.2.1A.5	Test Requirement	
8.2.2	Performance requirements for UL timing adjustment	
8.2.2.1	Definition and applicability	
8.2.2.2	Minimum Requirement	
8.2.2.3	Test Purpose	
8.2.2.4	Method of test	
8.2.2.4.1	Initial Conditions	
8.2.2.4.2	Procedure	
8.2.2.5	Test Requirement	
8.2.3	Performance requirements for HARQ-ACK multiplexed on PUSCH	
8.2.3.1	Definition and applicability	
8.2.3.2	Minimum Requirement	
8.2.3.3	Test Purpose	
8.2.3.3	Method of test	
8.2.3.4	Initial Conditions	
8.2.3.4.1		
	Procedure	
8.2.3.5	Test Requirement	
8.2.4	Performance requirements for High Speed Train conditions	
8.2.4.1	Definition and applicability	
8.2.4.2	Minimum Requirement	
8.2.4.3	Test Purpose	
8.2.4.4	Method of test	
8.2.4.4.1	Initial Conditions	
8.2.4.4.2	Procedure	
8.2.4.5	Test Requirement	
8.3	Performance requirements for PUCCH	
8.3.1	ACK missed detection for single user PUCCH format 1a transmission on single antenna port	
8.3.1.1	Definition and applicability	
8.3.1.2	Minimum Requirement	
8.3.1.3	Test purpose	
8.3.1.4	Method of test	

8.3.1.4.1	Initial Conditions	
8.3.1.4.2	Procedure	
8.3.1.5	Test Requirement	
8.3.2	CQI performance requirements for PUCCH format 2 transmission on single antenna port	
8.3.2.1	Definition and applicability	
8.3.2.2	Minimum Requirement	
8.3.2.3	Test purpose	
8.3.2.4	Method of test	
8.3.2.4.1	Initial Conditions	
8.3.2.4.2	Procedure	
8.3.2.5	Test Requirement	
8.3.3	ACK missed detection for multi user PUCCH format 1a	
8.3.3.1	Definition and applicability	
8.3.3.2	Minimum Requirement	
8.3.3.3	Test purpose	
8.3.3.4	Method of test	
8.3.3.4.1	Initial Conditions	
8.3.3.4.2	Procedure	
8.3.3.5	Test Requirement	
8.3.4	ACK missed detection for PUCCH format 1b with Channel Selection	
8.3.4.1	Definition and applicability	
8.3.4.2	Minimum Requirement	
8.3.4.3	Test purpose	
8.3.4.4	Method of test	
8.3.4.4.1	Initial Conditions	
8.3.4.4.2	Procedure	
8.3.4.5	Test Requirement	
8.3.5	ACK missed detection for PUCCH format 3	
8.3.5.1	Definition and applicability	
8.3.5.2	Minimum Requirement	
8.3.5.3	Test purpose	
8.3.5.4	Method of test	
8.3.5.4.1		
8.3.5.4.1 8.3.5.4.2	Initial Conditions	
8.3.5.4.2 8.3.5.5	Procedure	
8.3.6	Test Requirement NACK to ACK detection for PUCCH format 3	
8.3.6.1	Definition and applicability	
8.3.6.2	Minimum Requirement	
8.3.6.3	Test purpose	
8.3.6.4	Method of test	
8.3.6.4.1	Initial Conditions	
8.3.6.4.2	Procedure	
8.3.6.5	Test Requirement	
8.3.7	ACK missed detection for PUCCH format 1a transmission on two antenna ports	
8.3.7.1	Definition and applicability	
8.3.7.2	Minimum Requirement	
8.3.7.3	Test purpose	
8.3.7.4	Method of test	
8.3.7.4.1	Initial Conditions	
8.3.7.4.2	Procedure	
8.3.7.5	Test Requirement	
8.3.8	CQI performance requirements for PUCCH format 2 transmission on two antenna ports	
8.3.8.1	Definition and applicability	
8.3.8.2	Minimum Requirement	
8.3.8.3	Test purpose	
8.3.8.4	Method of test	
8.3.8.4.1	Initial Conditions	
8.3.8.4.2	Procedure	
8.3.8.5	Test Requirement	
8.3.9	CQI performance requirements for PUCCH format 2 with DTX detection	
8.3.9.1	Definition and applicability	
8.3.9.2	Minimum Requirement	202

8.39.4       Method of test       202         8.39.4.1       Initial Conditions       202         8.39.5       Test Requirement       203         8.39.5       Test Requirement on PRACH       203         8.4.1       PRACH false alarm probability usid missed detection       203         8.4.1       PRACH false alarm probability usid missed detection       203         8.4.1.2       Minimum Requirement       203         8.4.1.3       Test purpose       204         8.4.1.4       Initial Conditions       204         8.4.1.4       Procedure       204         8.4.1.4       Procedure       204         8.4.1.5       Test Requirement       206         A.1       Fixed Reference Channels for reference sensitivity and inchannel selectivity (QPSK, R=1/3)       206         A.2       Fixed Reference Channels for performance requirements (16QAM 3/4)       208         A.5       Fixed Reference Channels for performance requirements (64QAM 5/6)       208         A.6 <td< th=""><th>8.3.9.3</th><th>1 1</th><th></th></td<>	8.3.9.3	1 1	
8.39.4.2       Procedure.       202         8.39.5       Test Requirements for PRACH.       203         8.4.1       PRACH false alarm probability and missed detection.       203         8.4.1       Pefinition and applicability.       203         8.4.1.2       Minimum Requirement.       203         8.4.1.2       Minimum Requirement.       203         8.4.1.4       Method of test.       204         8.4.1.4       Initial Conditions.       204         8.4.1.4.1       Initial Conditions.       204         8.4.1.4.2       Procedure.       204         8.4.1.4.1       Initial Conditions.       204         8.4.1.4.2       Procedure.       204         8.4.1.4.3       Test Requirement.       205         A.1       Fixed Reference Channels for reference sensitivity and inchannel selectivity (QPSK, R=1/3).       206         A.1       Fixed Reference Channels for performance requirements (QPSK 1/3).       207         A.3       Fixed Reference Channels for performance requirements (I6QAM 3/4).       208         A.5       Fixed Reference Channels for performance requirements (64QAM 5/6).       208         A.6       PRACH Test preambles       208         A.7       Fixed Reference Channels for UL timing adjustme			
83.9.5       Test Requirement       203         84.1       PRACH false alarm probability and missed detection       203         84.1.1       Definition and applicability       203         84.1.2       Minimum Requirement       203         84.1.3       Test purpose       204         84.1.4       Minitoum Requirement       204         84.1.5       Test Requirement       204         84.1.4.1       Initial Conditions       204         84.1.4.2       Procedure       204         84.1.4.3       Test Requirement       204         84.1.4.2       Procedure       204         84.1.5       Test Requirement       205         Annex A (normative):       Reference Measurement channels       206         A.1       Fixed Reference Channels for reference sensitivity and inchannel selectivity (QPSK, R=1/3)       206         A.2       Fixed Reference Channels for dynamic range (16QAM, R=2/3)       207         A.3       Fixed Reference Channels for performance requirements (04QAM 3/4)       208         A.5       Fixed Reference Channels for Performance requirements (64QAM 5/6)       208         A.6       PRACH Test preambles       208         A.7       Fixed Reference Channels for UL timing adjustment (Scenario 2) <td></td> <td></td> <td></td>			
8.4       Performance requirements for PRACH       203         8.4.1       PRACH false alarm probability and missed detection       203         8.4.1.2       Minimum Requirement       203         8.4.1.3       Test purpose       204         8.4.1.4       Method of test       204         8.4.1.4       Intial Conditions       204         8.4.1.4       Procedure       204         8.4.1.4       Procedure       204         8.4.1.5       Test Reprose       206         A.1.5       Test Reprose       206         A.1.6       Reference Channels for reference sensitivity and inchannel selectivity (QPSK, R=1/3)       206         A.2       Fixed Reference Channels for performance requirements (IQAM, R=2/3)       207         A.3       Fixed Reference Channels for performance requirements (I6QAM 3/4)       208         A.5       Fixed Reference Channels for UL timing adjustment (Scenario 1)       209         A.6       PR			
8.4.1       PRACH false alarm probability and missed detection       203         8.4.1.1       Definition and applicability.       203         8.4.1.2       Minimum Requirement       203         8.4.1.3       Test purpose       204         8.4.1.4       Method of test       204         8.4.1.4       Initial Conditions       204         8.4.1.4.1       Initial Conditions       204         8.4.1.5       Test Requirement       204         8.4.1.5       Test Requirement       205         Annex A (normative):       Reference Measurement channels       206         A.0       General       206         A.1       Fixed Reference Channels for reference sensitivity and inchannel selectivity (QPSK, R=1/3)       206         A.2       Fixed Reference Channels for dynamic range (16QAM, R=2/3)       207         A.3       Fixed Reference Channels for performance requirements (GPSK 1/3)       207         A.4       Fixed Reference Channels for performance requirements (6QAM 3/4)       208         A.5       Fixed Reference Channels for UL timing adjustment (Scenario 1)       209         A.6       PRACH Test preambles       208         A.7       Fixed Reference Channels for UL timing adjustment (Scenario 2)       209 <t< td=""><td></td><td></td><td></td></t<>			
8.4.1.1       Definition and applicability			
8.4.1.2       Minimum Requirement       203         8.4.1.3       Test purpose       204         8.4.1.4       Method of test       204         8.4.1.4       Minimum Requirement       204         8.4.1.4.1       Initial Conditions       204         8.4.1.4.2       Procedure       204         8.4.1.5       Test Requirement       204         8.4.1.5       Test Requirement       205         Annex A (normative):       Reference Measurement channels       206         A.1       Fixed Reference Channels for reference sensitivity and inchannel selectivity (QPSK, R=1/3)       206         A.2       Fixed Reference Channels for dynamic range (16QAM, R=2/3)       207         A.3       Fixed Reference Channels for performance requirements (QPSK 1/3)       207         A.4       Fixed Reference Channels for performance requirements (GAQAM 5/6)       208         A.5       Fixed Reference Channels for UL timing adjustment (Scenario 1)       209         A.6       PRACH Test preambles       208         A.7       Fixed Reference Channels for UL timing adjustment (Scenario 2)       209         A.8       Fixed Reference Channels for UL timing adjustment (Scenario 2)       209         A.9       Multi user PUCCH test       210	- · ·		
84.1.3       Test purpose       204         84.1.4       Method of test       204         84.1.4.1       Initial Conditions       204         84.1.4.2       Procedure       204         84.1.5       Test Requirement       205         Annex A (normative):       Reference Measurement channels       206         A.1       Fixed Reference Channels for reference sensitivity and inchannel selectivity (QPSK, R=1/3)       206         A.2       Fixed Reference Channels for performance requirements (QPSK 1/3)       207         A.3       Fixed Reference Channels for performance requirements (I6QAM 3/4)       208         A.5       Fixed Reference Channels for performance requirements (I6QAM 5/6)       208         A.6       PRACH Test preambles       208         A.7       Fixed Reference Channels for UL timing adjustment (Scenario 1)       209         A.8       Fixed Reference Channels for UL timing adjustment (Scenario 2)       209         A.9       Multi user PUCCH test       210         A.10       PUCCH transmission on two antenna ports test.       210         Annex B (normative):       Propagation conditions       211         B.1       Static propagation conditions       213         B.3       High speed train condition       212			
84.1.4       Method of test       204         84.1.4.1       Initial Conditions       204         84.1.5       Test Requirement       204         84.1.5       Test Requirement       205         Annex A (normative):       Reference Measurement channels       206         A.0       General       206         A.1       Fixed Reference Channels for reference sensitivity and inchannel selectivity (QPSK, R=1/3)       206         A.2       Fixed Reference Channels for dynamic range (16QAM, R=2/3)       207         A.3       Fixed Reference Channels for performance requirements (QPSK 1/3)       207         A.4       Fixed Reference Channels for performance requirements (16QAM 3/4)       208         A.5       Fixed Reference Channels for performance requirements (64QAM 5/6)       208         A.6       PRACH Test preambles       208         A.7       Fixed Reference Channels for UL timing adjustment (Scenario 1)       209         A.8       Fixed Reference Channels for UL timing adjustment (Scenario 2)       209         A.9       Multi user PUCCH test       210         A.10       PUCCH transmission on two antenna ports test       210         Annex B (normative):       Propagation conditions       211         B.1       Static propagation conditions </td <td></td> <td>•</td> <td></td>		•	
8.4.1.4.2       Procedure.       204         8.4.1.5       Test Requirement       205         Annex A (normative):       Reference Measurement channels       206         A.0       General       206         A.1       Fixed Reference Channels for reference sensitivity and inchannel selectivity (QPSK, R=1/3)       206         A.2       Fixed Reference Channels for dynamic range (16QAM, R=2/3)       207         A.3       Fixed Reference Channels for performance requirements (0PSK 1/3)       207         A.4       Fixed Reference Channels for performance requirements (16QAM 3/4)       208         A.5       Fixed Reference Channels for performance requirements (64QAM 5/6)       208         A.6       PRACH Test preambles       208         A.7       Fixed Reference Channels for UL timing adjustment (Scenario 1)       209         A.8       Fixed Reference Channels for UL timing adjustment (Scenario 2)       209         A.9       Multi user PUCCH test       210         A.10       PUCCH transmission on two antenna ports test.       210         Annex B (normative):       Propagation conditions       211         B.1       Static propagation conditions       213         B.5.1       Definition of MINO Correlation Matrices       214         B.5.2		1 1	
8.4.1.5       Test Requirement       205         Annex A (normative):       Reference Measurement channels       206         A.0       General       206         A.1       Fixed Reference Channels for reference sensitivity and inchannel selectivity (QPSK, R=1/3)       207         A.2       Fixed Reference Channels for yerformance requirements (QPSK 1/3)       207         A.3       Fixed Reference Channels for performance requirements (QPSK 1/3)       207         A.4       Fixed Reference Channels for performance requirements (16QAM 3/4)       208         A.5       Fixed Reference Channels for performance requirements (64QAM 5/6)       208         A.6       PRACH Test preambles       208         A.7       Fixed Reference Channels for UL timing adjustment (Scenario 1)       209         A.8       Fixed Reference Channels for UL timing adjustment (Scenario 2)       209         A.9       Multi user PUCCH test       210         A.10       PUCCH transmission on two antenna ports test       210         Annex B (normative):       Propagation conditions       211         B.1       Static propagation conditions       211         B.3       High speed train condition       212         B.4       Moving propagation conditions       213         B.5.1	8.4.1.4	Initial Conditions	204
Annex A (normative):       Reference Measurement channels       206         A.0       General       206         A.1       Fixed Reference Channels for reference sensitivity and inchannel selectivity (QPSK, R=1/3).       206         A.2       Fixed Reference Channels for dynamic range (16QAM, R=2/3).       207         A.3       Fixed Reference Channels for performance requirements (QPSK 1/3)       207         A.4       Fixed Reference Channels for performance requirements (16QAM 3/4)       208         A.5       Fixed Reference Channels for performance requirements (64QAM 5/6)       208         A.6       PRACH Test preambles       208         A.7       Fixed Reference Channels for UL timing adjustment (Scenario 1)       209         A.8       Fixed Reference Channels for UL timing adjustment (Scenario 2)       209         A.9       Multi user PUCCH test       210         A.10       PUCCH transmission on two antenna ports test       210         Annex B (normative):       Propagation conditions       211         B.1       Static propagation conditions       211         B.3       High speed train condition       211         B.4       Moving propagation conditions       213         B.5       Multi-Antenna channel models       214         B.5.1	8.4.1.4		
A.0       General       206         A.1       Fixed Reference Channels for reference sensitivity and inchannel selectivity (QPSK, R=1/3).       206         A.2       Fixed Reference Channels for dynamic range (16QAM, R=2/3).       207         A.3       Fixed Reference Channels for performance requirements (QPSK 1/3).       207         A.4       Fixed Reference Channels for performance requirements (16QAM 3/4).       208         A.5       Fixed Reference Channels for performance requirements (6QAM 5/6).       208         A.6       PRACH Test preambles       209         A.7       Fixed Reference Channels for UL timing adjustment (Scenario 1)       209         A.8       Fixed Reference Channels for UL timing adjustment (Scenario 2)       209         A.9       Multi user PUCCH test       210         A.10       PUCCH transmission on two antenna ports test.       210         A.10       PUCCH transmission on two antenna ports test.       211         B.1       Static propagation conditions       211         B.2       Multi-path fading propagation conditions       213         B.5       Multi-path fading propagation conditions       214         B.5.1       Definition of MIMO Correlation Matrices       214         B.5.2       MIMO Correlation Matrices at High, Medium and Low Level	8.4.1.5	5 Test Requirement	205
A.1       Fixed Reference Channels for reference sensitivity and inchannel selectivity (QPSK, R=1/3)	Anne	x A (normative): Reference Measurement channels	206
A.2       Fixed Reference Channels for dynamic range (16QAM, R=2/3).       207         A.3       Fixed Reference Channels for performance requirements (16QAM 3/4)       208         A.4       Fixed Reference Channels for performance requirements (16QAM 3/4)       208         A.5       Fixed Reference Channels for performance requirements (64QAM 5/6)       208         A.6       PRACH Test preambles       208         A.7       Fixed Reference Channels for UL timing adjustment (Scenario 1)       209         A.8       Fixed Reference Channels for UL timing adjustment (Scenario 2)       209         A.9       Multi user PUCCH test.       210         A.10       PUCCH transmission on two antenna ports test.       210         Annex B (normative):       Propagation conditions       211         B.1       Static propagation conditions       211         B.3       High speed train conditions       212         B.4       Moving propagation conditions       213         B.5       Multi-Antenna channel models       214         B.5.1       Definition of MIMO Correlation Matrices       214         B.5.2       MIMO Correlation Matrices at High, Medium and Low Level       215         Annex D (normative):       Characteristics of the interfering signals       218	A.0	General	206
A.3       Fixed Reference Channels for performance requirements (QPSK 1/3)       207         A.4       Fixed Reference Channels for performance requirements (16QAM 3/4)       208         A.5       Fixed Reference Channels for performance requirements (64QAM 5/6)       208         A.6       PRACH Test preambles       208         A.7       Fixed Reference Channels for UL timing adjustment (Scenario 1)       209         A.8       Fixed Reference Channels for UL timing adjustment (Scenario 2)       209         A.9       Multi user PUCCH test.       210         A.10       PUCCH transmission on two antenna ports test.       210         Annex B (normative):       Propagation conditions       211         B.1       Static propagation conditions       211         B.3       High speed train conditions       212         B.4       Moving propagation conditions       213         B.5       Multi-Antenna channel models       214         B.5.1       Definition of MIMO Correlation Matrices       214         B.5.2       MIMO Correlation Matrices at High, Medium and Low Level       215         Annex C (normative):       Characteristics of the interfering signals       218         Annex D (normative):       Environmental requirements for the BS equipment       219	A.1	Fixed Reference Channels for reference sensitivity and inchannel selectivity (QPSK, R=1/3)	206
A.4       Fixed Reference Channels for performance requirements (16QAM 3/4)       208         A.5       Fixed Reference Channels for performance requirements (64QAM 5/6)       208         A.6       PRACH Test preambles       208         A.7       Fixed Reference Channels for UL timing adjustment (Scenario 1)       209         A.8       Fixed Reference Channels for UL timing adjustment (Scenario 2)       209         A.9       Multi user PUCCH test       210         A.10       PUCCH transmission on two antenna ports test       210         Annex B (normative):       Propagation conditions       211         B.1       Static propagation condition       211         B.3       High speed train condition       212         B.4       Moving propagation conditions       213         B.5.1       Definition of MIMO Correlation Matrices       214         B.5.2       MIMO Correlation Matrices at High, Medium and Low Level       215         Annex D (normative):       Characteristics of the interfering signals       218         Annex D (normative):       Environmental requirements for the BS equipment       219         D.1       General       219       219         D.3       Extreme test environment       219         D.4       Vibration       <	A.2	Fixed Reference Channels for dynamic range (16QAM, R=2/3)	207
A.5       Fixed Reference Channels for performance requirements (64QAM 5/6)       208         A.6       PRACH Test preambles       208         A.7       Fixed Reference Channels for UL timing adjustment (Scenario 1)       209         A.8       Fixed Reference Channels for UL timing adjustment (Scenario 2)       209         A.9       Multi user PUCCH test.       210         A.10       PUCCH transmission on two antenna ports test.       210         Annex B (normative):       Propagation conditions.       211         B.1       Static propagation condition       211         B.2       Multi-path fading propagation conditions       211         B.3       High speed train conditions       213         B.4       Moving propagation conditions       214         B.5.1       Definition of MIMO Correlation Matrices       214         B.5.2       MIMO Correlation Matrices at High, Medium and Low Level       215         Annex D (normative):       Characteristics of the interfering signals       219         D.1       General       219         D.2       Normal test environment       219         D.3       Extreme test environment       219         D.4       Vibration       220	A.3	Fixed Reference Channels for performance requirements (QPSK 1/3)	207
A.6       PRACH Test preambles       .208         A.7       Fixed Reference Channels for UL timing adjustment (Scenario 1)       .209         A.8       Fixed Reference Channels for UL timing adjustment (Scenario 2)       .209         A.9       Multi user PUCCH test.       .210         A.10       PUCCH transmission on two antenna ports test.       .210         Annex B (normative):       Propagation conditions       .211         B.1       Static propagation condition       .211         B.2       Multi-path fading propagation conditions       .211         B.3       High speed train conditions       .211         B.4       Moving propagation conditions       .213         B.5       Multi-Antenna channel models       .214         B.5.1       Definition of MIMO Correlation Matrices       .214         B.5.2       MIMO Correlation Matrices at High, Medium and Low Level       .215         Annex D (normative):       Characteristics of the interfering signals       .218         Annex D (normative):       Environmental requirements for the BS equipment       .219         D.1       General       .219       .219         D.3       Extreme test environment       .219         D.4       Vibration       .220 <td>A.4</td> <td>Fixed Reference Channels for performance requirements (16QAM 3/4)</td> <td>208</td>	A.4	Fixed Reference Channels for performance requirements (16QAM 3/4)	208
A.7       Fixed Reference Channels for UL timing adjustment (Scenario 1)       .209         A.8       Fixed Reference Channels for UL timing adjustment (Scenario 2)       .209         A.9       Multi user PUCCH test.       .210         A.10       PUCCH transmission on two antenna ports test.       .210         Annex B (normative):       Propagation conditions.       .211         B.1       Static propagation condition       .211         B.2       Multi-path fading propagation conditions.       .211         B.3       High speed train condition.       .212         B.4       Moving propagation conditions.       .213         B.5       Multi-Antenna channel models.       .214         B.5.1       Definition of MIMO Correlation Matrices       .214         B.5.2       MIMO Correlation Matrices at High, Medium and Low Level       .215         Annex C (normative):       Characteristics of the interfering signals.       .218         Annex D (normative):       Environmental requirements for the BS equipment       .219         D.1       General       .219       .219         D.3       Extreme temperature       .219         D.4       Vibration       .220	A.5	Fixed Reference Channels for performance requirements (64QAM 5/6)	208
A.7       Fixed Reference Channels for UL timing adjustment (Scenario 1)       .209         A.8       Fixed Reference Channels for UL timing adjustment (Scenario 2)       .209         A.9       Multi user PUCCH test.       .210         A.10       PUCCH transmission on two antenna ports test.       .210         Annex B (normative):       Propagation conditions.       .211         B.1       Static propagation condition       .211         B.2       Multi-path fading propagation conditions.       .211         B.3       High speed train condition.       .212         B.4       Moving propagation conditions.       .213         B.5       Multi-Antenna channel models.       .214         B.5.1       Definition of MIMO Correlation Matrices       .214         B.5.2       MIMO Correlation Matrices at High, Medium and Low Level       .215         Annex C (normative):       Characteristics of the interfering signals.       .218         Annex D (normative):       Environmental requirements for the BS equipment       .219         D.1       General       .219       .219         D.3       Extreme temperature       .219         D.4       Vibration       .220	A.6	PRACH Test preambles	208
A.8       Fixed Reference Channels for UL timing adjustment (Scenario 2)       .209         A.9       Multi user PUCCH test.       .210         A.10       PUCCH transmission on two antenna ports test.       .210         Annex B (normative):       Propagation conditions.       .211         B.1       Static propagation condition       .211         B.2       Multi-path fading propagation conditions       .211         B.3       High speed train condition       .212         B.4       Moving propagation conditions       .213         B.5       Multi-Antenna channel models       .214         B.5.1       Definition of MIMO Correlation Matrices       .214         B.5.2       MIMO Correlation Matrices at High, Medium and Low Level       .215         Annex C (normative):       Characteristics of the interfering signals       .218         Annex D (normative):       Environmental requirements for the BS equipment       .219         D.1       General       .219       .219         D.3       Extreme test environment       .219         D.4       Vibration       .220	A.7		
A.9       Multi user PUCCH test.       210         A.10       PUCCH transmission on two antenna ports test.       210         Annex B (normative):       Propagation conditions.       211         B.1       Static propagation condition       211         B.2       Multi-path fading propagation conditions       211         B.3       High speed train condition.       212         B.4       Moving propagation conditions.       213         B.5       Multi-Antenna channel models       214         B.5.1       Definition of MIMO Correlation Matrices       214         B.5.2       MIMO Correlation Matrices at High, Medium and Low Level       215         Annex C (normative):       Characteristics of the interfering signals       218         Annex D (normative):       Environmental requirements for the BS equipment       219         D.1       General       219         D.3       Extreme test environment       219         D.4       Vibration       220	A.8		
Annex B (normative):       Propagation conditions.       211         B.1       Static propagation condition.       211         B.2       Multi-path fading propagation conditions       211         B.3       High speed train condition.       211         B.4       Moving propagation conditions.       213         B.4       Moving propagation conditions.       213         B.5       Multi-Antenna channel models.       214         B.5.1       Definition of MIMO Correlation Matrices       214         B.5.2       MIMO Correlation Matrices at High, Medium and Low Level       215         Annex C (normative):       Characteristics of the interfering signals       218         Annex D (normative):       Environmental requirements for the BS equipment       219         D.1       General       219         D.3       Extreme test environment       219         D.4       Vibration       220	A.9		
Annex B (normative):       Propagation conditions.       211         B.1       Static propagation condition.       211         B.2       Multi-path fading propagation conditions       211         B.3       High speed train condition.       211         B.4       Moving propagation conditions.       213         B.4       Moving propagation conditions.       213         B.5       Multi-Antenna channel models.       214         B.5.1       Definition of MIMO Correlation Matrices       214         B.5.2       MIMO Correlation Matrices at High, Medium and Low Level       215         Annex C (normative):       Characteristics of the interfering signals       218         Annex D (normative):       Environmental requirements for the BS equipment       219         D.1       General       219         D.3       Extreme test environment       219         D.4       Vibration       220	A.10		
B.1       Static propagation condition       211         B.2       Multi-path fading propagation conditions       211         B.3       High speed train condition       212         B.4       Moving propagation conditions       213         B.5       Multi-Antenna channel models       214         B.5.1       Definition of MIMO Correlation Matrices       214         B.5.2       MIMO Correlation Matrices at High, Medium and Low Level       215         Annex C (normative):       Characteristics of the interfering signals       218         Annex D (normative):       Environmental requirements for the BS equipment       219         D.1       General       219         D.3       Extreme test environment       219         D.4       Vibration       220			
B.2       Multi-path fading propagation conditions       211         B.3       High speed train condition       212         B.4       Moving propagation conditions       213         B.5       Multi-Antenna channel models       214         B.5.1       Definition of MIMO Correlation Matrices       214         B.5.2       MIMO Correlation Matrices at High, Medium and Low Level       215         Annex C (normative):       Characteristics of the interfering signals       218         Annex D (normative):       Environmental requirements for the BS equipment       219         D.1       General       219         D.2       Normal test environment       219         D.3       Extreme test environment       219         D.4       Vibration       220			
B.3       High speed train condition       212         B.4       Moving propagation conditions       213         B.5       Multi-Antenna channel models       214         B.5.1       Definition of MIMO Correlation Matrices       214         B.5.2       MIMO Correlation Matrices at High, Medium and Low Level       215         Annex C (normative):       Characteristics of the interfering signals       218         Annex D (normative):       Environmental requirements for the BS equipment       219         D.1       General       219         D.2       Normal test environment       219         D.3       Extreme test environment       219         D.4       Vibration       220			
B.4       Moving propagation conditions.       213         B.5       Multi-Antenna channel models       214         B.5.1       Definition of MIMO Correlation Matrices       214         B.5.2       MIMO Correlation Matrices at High, Medium and Low Level       215         Annex C (normative):       Characteristics of the interfering signals       218         Annex D (normative):       Environmental requirements for the BS equipment       219         D.1       General       219         D.2       Normal test environment       219         D.3       Extreme test environment       219         D.4       Vibration       220	-	Multi-path fading propagation conditions	211
B.5       Multi-Antenna channel models       214         B.5.1       Definition of MIMO Correlation Matrices       214         B.5.2       MIMO Correlation Matrices at High, Medium and Low Level       215         Annex C (normative):       Characteristics of the interfering signals       218         Annex D (normative):       Environmental requirements for the BS equipment       219         D.1       General       219         D.2       Normal test environment       219         D.3       Extreme test environment       219         D.4       Vibration       220			
B.5.1 Definition of MIMO Correlation Matrices       214         B.5.2 MIMO Correlation Matrices at High, Medium and Low Level       215         Annex C (normative):       Characteristics of the interfering signals       218         Annex D (normative):       Environmental requirements for the BS equipment       219         D.1       General       219         D.2       Normal test environment       219         D.3       Extreme test environment       219         D.4       Vibration       220			
B.5.2       MIMO Correlation Matrices at High, Medium and Low Level       .215         Annex C (normative):       Characteristics of the interfering signals       .218         Annex D (normative):       Environmental requirements for the BS equipment       .219         D.1       General       .219         D.2       Normal test environment       .219         D.3       Extreme test environment       .219         D.3.1       Extreme temperature       .219         D.4       Vibration       .220			
Annex C (normative):Characteristics of the interfering signals			
Annex D (normative):       Environmental requirements for the BS equipment			
D.1General219D.2Normal test environment219D.3Extreme test environment219D.3.1Extreme temperature219D.4Vibration220			
D.2Normal test environment219D.3Extreme test environment219D.3.1Extreme temperature219D.4Vibration220			
D.3Extreme test environment			
D.3.1Extreme temperature219D.4Vibration220			
D.4 Vibration			
D.5 Power supply	D.5	Power supply	
D.6 Measurement of test environments			
Annex E (normative): General rules for statistical testing	Anne	x E (normative): General rules for statistical testing	221

Anne	ex F (normative):	Global In-Channel TX-Test	222
F.1	General		222
F.2.1	Basic principle		222
F.2.2			
F.2.3			
F.2.4			
F.2.5			
F.3.1 F.3.2		n processindow	
г.з.2 F.3.3		X power	
F.3.4		n	
F.4.1			
F.4.2			
F.4.2.	1 Averaged EVM (	TDD)	228
Anne	ex G (informative):	Test Tolerances and Derivation of Test Requirements	229
G.1	Measurement of transm	nitter	230
G.2	Measurement of receiv	/er	234
G.3	Measurement of Perfor	rmance Requirements	237
Anne	ex H (Informative):	E-UTRAN Measurement Test Cases	239
	ex I (Informative):	Measurement system set-up	
I.1			240
I.1.1		ower, output power dynamics, transmitted signal quality, Frequency error, EVM, nted emissions	240
I.1.2		lulation	
I.1.2 I.1.3			
I.1.4		ver for adjacent channel protection	
I.1.5	Home BS output pow	ver for co-channel E-UTRA protection	241
I.2	Receiver		242
I.2.1		level	
I.2.2			
I.2.3		Ι	
I.2.4		lectivity (ACS) and narrowband blocking	
I.2.5		ics	
I.2.6		ission	
I.2.7		acteristics	
I.3	Performance requirem	ent	247
I.3.1		nents for PRACH in static conditions	
I.3.2		nents for PUSCH, PRACH, single user PUCCH in multipath fading conditions and	
122	for High Speed Train	conditions	247
I.3.3		nents for multi user PUCCH in multipath fading conditions	
I.3.4 I.3.5	Performance requirer	nent for UL timing adjustment nents for PUCCH transmission on two antenna ports in multipath fading	
I.3.6		nents for PUSCH transmission on two antenna ports in multipath fading conditions	
	ex J (Informative):		
J.1		Unwanted emission requirements for multi-carrier b5	
J.2		ferent E-UTRA channel bandwidths	
J.3		UTRA and UTRA	
	ex K (informative):	Change history	
		Change history	
11500	- J	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	

# Foreword

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

# 1 Scope

The present document specifies the Radio Frequency (RF) test methods and conformance requirements for E-UTRA Base Stations (BS) operating either in the FDD mode (used in paired bands) or the TDD mode (used in unpaired bands). These have been derived from, and are consistent with the E-UTRA Base Station (BS) specifications defined in [2].

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.
- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications.
- [2] 3GPP TS 36 104: "E-UTRA Base Station (BS) radio transmission and reception".
- [3] ITU-R Recommendation M.1545, 'Measurement uncertainty as it applies to test limits for the terrestrial component of International Mobile Telecommunications-2000'.
- [4] ITU-R recommendation SM.328: "Spectra and bandwidth of emissions".
- [5] ITU-R recommendation SM.329: "Unwanted emissions in the spurious domain ".
- [6] IEC 60721-3-3 (2002): "Classification of environmental conditions Part 3: Classification of groups of environmental parameters and their severities Section 3: Stationary use at weather protected locations".
- [7] IEC 60721-3-4 (1995): "Classification of environmental conditions Part 3: Classification of groups of environmental parameters and their severities - Section 4: Stationary use at non-weather protected locations".
- [8] IEC 60068-2-1 (2007): "Environmental testing Part 2: Tests. Tests A: Cold".
- [9] IEC 60068-2-2 (2007): "Environmental testing Part 2: Tests. Tests B: Dry heat".
- [10] IEC 60068-2-6 (2007): "Environmental testing Part 2: Tests Test Fc: Vibration (sinusoidal)".
- [11] 3GPP TR 25.942: "RF system scenarios".
- [12] 3GPP TS 36.211: "Evolved Universal Terrestrial Radio Access (E-UTRA); Physical Channels and Modulation".
- [13] 3GPP TS 36.212: "Evolved Universal Terrestrial Radio Access (E-UTRA); Multiplexing and channel coding".
- [14] 3GPP TR 36.942: "E-UTRA RF system scenarios".
- [15] 3GPP TS 25.104: "Base Station (BS) radio transmission and Reception (FDD)".
- [16] 3GPP TS 36.213: "Evolved Universal Terrestrial Radio Access (E-UTRA); Physical layer procedures".
- [17] 3GPP TS 25.141: "Base Station (BS) conformance testing (FDD)".

[18] 3GPP TS 37.141: " E-UTRA, UTRA and GSM/EDGE; Multi-Standard Radio (MSR) Base Station (BS) conformance testing".

# 3 Definitions, symbols and abbreviations

# 3.1 Definitions

For the purposes of the present document, the terms and definitions given in TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in TR 21.905 [1].

**Aggregated Channel Bandwidth:** The RF bandwidth in which a Base Station transmits and receives multiple contiguously aggregated carriers. The aggregated channel bandwidth is measured in MHz.

Base Station RF bandwidth edge: The frequency of one of the edges of the Base Station RF bandwidth.

Base station receive period: The time during which the base station is receiving data subframes or UpPTS.

**Base Station RF bandwidth:** The bandwidth in which a Base Station transmits and receives multiple carriers within a supported operating band.

Carrier: The modulated waveform conveying the E-UTRA or UTRA (WCDMA) physical channels

**Carrier aggregation:** aggregation of two or more component carriers in order to support wider transmission bandwidths

**Carrier aggregation band:** a set of one or more operating bands across which multiple carriers are aggregated with a specific set of technical requirements

NOTE: Carrier aggregation band(s) for an E-UTRA BS is declared by the manufacturer according to the designations in Tables 5.5-2 to 5.5-4

**Channel bandwidth:** The RF bandwidth supporting a single E-UTRA RF carrier with the transmission bandwidth configured in the uplink or downlink of a cell. The channel bandwidth is measured in MHz and is used as a reference for transmitter and receiver RF requirements.

Channel edge: The lowest and highest frequency of the E-UTRA carrier, separated by the channel bandwidth.

**Contiguous carriers:** a set of two or more carriers configured in a spectrum block where there are no RF requirements based on co-existence for un-coordinated operation within the spectrum block.

Contiguous spectrum: Spectrum consisting of a contiguous block of spectrum with no sub-block gap(s).

DL RS power: The resource element power of Downlink Reference Symbol.

Downlink operating band: The part of the operating band designated for downlink.

**Highest Carrier:** The carrier with the highest carrier centre frequency transmitted/received in a specified operating band.

**Inter RF bandwidth gap:** The frequency gap between two consecutive RF bandwidths that are placed within two supported operating bands.

Inter-band carrier aggregation: carrier aggregation of component carriers in different operating bands.

NOTE: Carriers aggregated in each band can be contiguous or non-contiguous.

Intra-band contiguous carrier aggregation: contiguous carriers aggregated in the same operating band.

Intra-band non-contiguous carrier aggregation: non-contiguous carriers aggregated in the same operating band.

**Lower Edge:** The lowest frequency in the Base station RF bandwidth, or the lowest frequency in the channel bandwidth of a single E-UTRA carrier, used as a frequency reference point for transmitter and receiver requirements.

**Lower sub-block edge:** The frequency at the lower edge of one sub-block. It is used as a frequency reference point for both transmitter and receiver requirements.

Lowest Carrier: The carrier with the lowest carrier centre frequency transmitted/received in a specified operating band.

Maximum Base Station RF bandwidth: The maximum RF bandwidth supported by a BS within each supported operating band.

**Maximum output power:** The mean power level per carrier of the base station measured at the antenna connector in a specified reference condition.

Maximum radio bandwidth: Maximum frequency difference between the upper edge of the highest used carrier and the lower edge of the lowest used carrier.

Maximum throughput: The maximum achievable throughput for a reference measurement channel.

**Mean power:** When applied to E-UTRA transmission this is the power measured in the channel bandwidth of the carrier. The period of measurement shall be at least one subframe (1ms), unless otherwise stated.

**Multi-band Base Station:** Base Station characterized by the ability of its transmitter and/or receiver to process two or more carriers in common active RF components simultaneously, where at least one carrier is configured at a different non-overlapping operating band than the other carrier(s).

**Multi-carrier transmission configuration:** A set of one or more contiguous or non-contiguous carriers that a BS is able to transmit simultaneously according to the manufacturer"s specification.

**Multi-band transmitter:** Transmitter characterized by the ability to process two or more carriers in common active RF components simultaneously, where at least one carrier is configured at a different non-overlapping operating band than the other carrier(s).

**Multi-band receiver:** Receiver characterized by the ability to process two or more carriers in common active RF components simultaneously, where at least one carrier is configured at a different non-overlapping operating band than the other carrier(s).

Non-contiguous spectrum: Spectrum consisting of two or more sub-blocks separated by sub-block gap(s).

**Occupied bandwidth:** The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage  $\beta/2$  of the total mean power of a given emission.

**Operating band:** A frequency range (paired or unpaired) that is defined with a specific set of technical requirements, in which E-UTRA operates.

NOTE: The operating band(s) for an E-UTRA BS is declared by the manufacturer according to the designations in Table 5.5-1.

**Output power:** The mean power of one carrier of the base station, delivered to a load with resistance equal to the nominal load impedance of the transmitter.

**Rated output power:** Rated output power of the base station is the mean power level per carrier that the manufacturer has declared to be available at the antenna connector.

**RE power control dynamic range:** The difference between the power of a RE and the average RE power for a BS at maximum output power for a specified reference condition.

Reference bandwidth: The bandwidth in which an emission level is specified.

**RRC filtered mean power:** The mean power as measured through a root raised cosine filter with roll-off factor  $\alpha$  and a bandwidth equal to the chip rate of the radio access mode.

NOTE 1: The RRC filtered mean power of a perfectly modulated W-CDMA signal is 0.246 dB lower than the mean power of the same signal.

**Sub-block:** This is one contiguous allocated block of spectrum for transmission and reception by the same Base Station. There may be multiple instances of sub-blocks within an RF bandwidth.

Sub-block bandwidth: The bandwidth of one sub-block.

**Sub-block gap:** A frequency gap between two consecutive sub-blocks within an RF bandwidth, where the RF requirements in the gap are based on co-existence for un-coordinated operation.

**Synchronized operation:** Operation of TDD in two different systems, where no simultaneous uplink and downlink occur.

**Throughput:** The number of payload bits successfully received per second for a reference measurement channel in a specified reference condition.

**Total power dynamic range:** The difference between the maximum and the minimum transmit power of an OFDM symbol for a specified reference condition.

Total RF bandwidth: Maximum sum of RF bandwidths in all supported operating bands.

**Transmission bandwidth:** Bandwidth of an instantaneous transmission from a UE or BS, measured in Resource Block units.

**Transmission bandwidth configuration:** The highest transmission bandwidth allowed for uplink or downlink in a given channel bandwidth, measured in Resource Block units.

Transmitter OFF period: The time period during which the BS transmitter is not allowed to transmit.

**Transmitter ON period:** The time period during which the BS transmitter is transmitting data and/or reference symbols, i.e. data subframes or DwPTS.

**Transmitter transient period:** The time period during which the transmitter is changing from the OFF period to the ON period or vice versa.

**Unsynchronized operation:** Operation of TDD in two different systems, where the conditions for synchronized operation are not met.

Uplink operating band: The part of the operating band designated for uplink.

**Upper Edge:** The highest frequency in the Base Station RF Bandwidth or the highest frequency in the channel bandwidth of a single E-UTRA carrier; used as a frequency reference point for transmitter and receiver requirements.

**Upper sub-block edge:** The frequency at the upper edge of one sub-block. It is used as a frequency reference point for both transmitter and receiver requirements.

# 3.2 Symbols

For the purposes of the present document, the following symbols apply:

α	Roll-off factor
β	Percentage of the mean transmitted power emitted outside the occupied bandwidth on the assigned
	channel
$BW_{Channel}$	Channel bandwidth
BW <sub>Channel_CA</sub>	Aggregated channel bandwidth, expressed in MHz. BW <sub>Channel_CA</sub> = F <sub>edge_high</sub> - F <sub>edge_low</sub> .
BW <sub>Channel,block</sub>	Sub-block bandwidth, expressed in MHz. BW <sub>Channel,block</sub> = F <sub>edge,block,high</sub> - F <sub>edge,block,low</sub> .
$BW_{Config}$	Transmission bandwidth configuration, expressed in MHz, where $BW_{Config} = N_{RB} \times 180 \text{ kHz}$ in the
6	uplink and BWConfig = $15 \text{ kHz} + \text{NRB x} 180 \text{ kHz}$ in the downlink.
CA_X	Contiguous intra-band CA for band X where X is the applicable E-UTRA operating band
CA_X-X	Non-contiguous intra band CA for band X where X is the applicable E-UTRA operating band
CA_X-Y	CA for band X and Band Y where X and Y are the applicable E-UTRA operating band
f	Frequency
$\Delta f$	Separation between the channel edge frequency and the nominal -3dB point of the measuring filter
	closest to the carrier frequency
$\Delta f_{max}$	The largest value of $\Delta f$ used for defining the requirement
F <sub>C</sub>	Carrier centre frequency
C	1

#### 3GPP TS 36.141 version 11.9.0 Release 11

$F_{C,block, high}$	Center frequency of the highest transmitted/received carrier in a sub-block.
$F_{C,block, low}$	Center frequency of the lowest transmitted/received carrier in a sub-block.
$F_{C_{high}}$	The carrier centre frequency of the highest carrier, expressed in MHz.
$F_{C_{low}}$	The carrier centre frequency of the lowest carrier, expressed in MHz.
$F_{edge_{low}}$	The lower edge of aggregated channel bandwidth, expressed in MHz. $F_{edge_low} = F_{C_low} - F_{offset}$ .
$F_{edge_high}$	The upper edge of aggregated channel bandwidth, expressed in MHz. $F_{edge\_high} = F_{C\_high} + F_{offset.}$
$F_{edge,block,low}$	The lower sub-block edge, where $F_{edge,block,low} = F_{C,block,low} - F_{offset}$ .
$F_{edge,block,high}$	The upper sub-block edge, where $F_{edge,block,high} = F_{C,block,high} + F_{offset}$ .
F <sub>offset</sub>	Frequency offset from $F_{C_{high}}$ to the upper edge or from $F_{C,block, high}$ to the upper sub-block edge,
onder	$F_{C_{low}}$ to the lower edge or from $F_{C,block,low}$ to the lower sub-block edge.
F <sub>filter</sub>	Filter centre frequency
f_offset	Separation between the channel edge frequency and the centre of the measuring filter
f_offset <sub>max</sub>	The maximum value of f_offset used for defining the requirement
E <sub>A</sub> :	EPRE (energy per resource element) of PDSCH REs (resource elements) type A, i.e. REs in
	OFDM symbols that do not include reference symbols
$E_B$ :	EPRE of PDSCH REs type B, i.e. REs in OFDM symbols that include reference symbols
E <sub>RS</sub> :	EPRE of reference symbols REs
$F_{DL_{low}}$	The lowest frequency of the downlink operating band
$\mathrm{F}_{\mathrm{DL}_{\mathrm{high}}}$	The highest frequency of the downlink operating band The lowest frequency of the uplink operating band
F <sub>UL_low</sub> F <sub>UL_high</sub>	The highest frequency of the uplink operating band
N <sub>DL</sub>	Downlink EARFCN
N <sub>Offs-DL</sub>	Offset used for calculating downlink EARFCN
N <sub>Offs-UL</sub>	Offset used for calculating uplink EARFCN
$N_{ m ID}^{ m cell}$	Physical layer cell identity
$N_{CS}$	Number of Cyclic shifts for preamble generation in PRACH
$N_{\rm RB}$	Transmission bandwidth configuration, expressed in units of Resource Blocks
$N_{ m RB}^{ m DL}$	Downlink bandwidth configuration, expressed in multiples of $N_{\rm sc}^{\rm RB}$
N <sub>UL</sub>	Uplink EARFCN
$N_{\rm sc}^{ m RB}$	Resource block size in the frequency domain, expressed as a number of subcarriers
n <sub>f</sub>	System frame number
$n_{\rm PRB}$	Physical resource block number
n <sub>RNTI</sub>	Radio network temporary identifier
n <sub>s</sub>	Slot number within a radio frame
р	Antenna port number
Pd	Probability of PRACH preamble detection
Pfa	Total probability of false detection of the PRACH preamble
Pout	Output power Declared emission level for channel N
P <sub>EM,N</sub> Pmax	Maximum total output power
Pmax, c	Maximum total output power Maximum carrier output power
P <sub>REFSENS</sub>	Reference sensitivity power level
q	Code word number
T <sub>A</sub>	Timing advance command, as defined in [16]
$T_{s}$	Basic time unit, as defined in [12]
$W_{gap}$	Sub-block gap or inter RF bandwidth gap size
'' gap	Sub Slock Sup of miler for build width Sup size

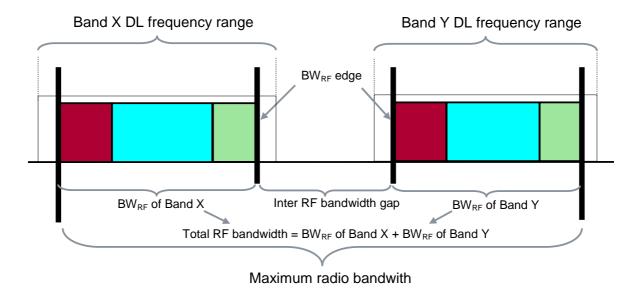


Figure 3.2-1 Illustration of maximum radio bandwidth and Total RF bandwidth for Multi-band Base Station

# 3.3 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [1].

AC	Alternating Current
ACLR	Adjacent Channel Leakage Ratio
CACLR	Cumulative ACLR
ACK	Acknowledgement (in HARQ protocols)
ACS	Adjacent Channel Selectivity
ATT	Attenuator
AWGN	Additive White Gaussian Noise
В	Bottom RF channel (for testing purposes)
BS	Base Station
С	Contiguous
CA	Carrier Aggregation
BW	Bandwidth
CCE	Control Channel Element
СР	Cyclic prefix
CW	Continuous Wave
DC	Direct Current
DFT	Discrete Fourier Transformation
DTT	Digital Terrestrial Television
DUT	Device Under Test
EPRE	Energy per resource element
E-TM	E-UTRA Test Model
E-UTRA	Evolved UTRA
EARFCN	E-UTRA Absolute Radio Frequency Channel Number
EPA	Extended Pedestrian A model
ETC	E-UTRA Test Configuration
ETU	Extended Typical Urban model
EVA	Extended Vehicular A model
EVM	Error Vector Magnitude
FDD	Frequency Division Duplex
FFT	Fast Fourier Transformation
FRC	Fixed Reference Channel

#### 3GPP TS 36.141 version 11.9.0 Release 11

19

царо	Hybrid Automatic Depost Dequest
HARQ	Hybrid Automatic Repeat Request
ICS	In-Channel Selectivity
IQ ITU D	In-phase - Quadrature phase
ITU-R	Radiocommunication Sector of the ITU
Iuant	E-Node B internal logical interface between the implementation specific O&M function and the
<b>T</b> A	RET antennas and TMAs control unit function of the E-Node B
LA	Local Area
Μ	Middle RF channel (for testing purposes)
MC	Multi-carrier
MIMO	Multiple Input Multiple Output
MCS	Modulation and Coding Scheme
MR	Medium Range
NC	Non-Contiguous
OBW	Occupied Band Width
OFDM	Orthogonal Frequency Division Multiplex
OOB	Out-Of-Band
PBCH	Physical Broadcast Channel
PCFICH	Physical control format indicator channel
PDCCH	Physical downlink control channel
PDSCH	Physical downlink shared channel
PHICH	Physical hybrid-ARQ indicator channel
PUCCH	Physical Uplink Control CHannel
PRACH	Physical Random Access Channel
PRB	Physical Resource Block
PSD	Power Spectral Density
QAM	Quadrature Amplitude Modulation
QPSK	Quadrature Phase-Shift Keying
RAT	Radio Access Technology
RB	Resource Block
RE	Resource Element
REG	Resource Element Group
RF	Radio Frequency
RS	Reference Symbol
RX	Receive
RRC	Root Raised Cosine
SNR	Signal-to-Noise Ratio
SQRT	SQuare RooT
SQICI	Single Carrier
SRS	Sounding Reference Signal
T	Top RF channel (for testing purposes)
TA	Timing Advance
TC	Test Configuration
TDD	
TT	Time Division Duplex Test Tolerance
TX	Transmit
UE	
UE UMTS	User Equipment Universal Mobile Telecommunications System
UTRA	•
WA	UMTS Terrestrial Radio Access Wide Area
WV A	W LUC ALCA

# 4 General test conditions and declarations

Many of the tests in this specification measure a parameter relative to a value that is not fully specified in the E-UTRA specifications. For these tests, the Minimum Requirement is determined relative to a nominal value specified by the manufacturer.

Certain functions of a BS are optional in the E-UTRA specifications. Some requirements for the BS may be regional as listed in subclause 4.3.

When specified in a test, the manufacturer shall declare the nominal value of a parameter, or whether an option is supported.

# 4.1 Measurement uncertainties and Test Requirements

### 4.1.1 General

The requirements of this clause apply to all applicable tests in this specification.

The Minimum Requirements are given in 36.104 [2] and test requirements are given in this specification. Test Tolerances are defined in Annex G of this specification. Test Tolerances are individually calculated for each test. The Test Tolerances are used to relax the Minimum Requirements in 36.104 [2] to create Test Requirements.

### 4.1.2 Acceptable uncertainty of Test System

The maximum acceptable uncertainty of the Test System is specified below for each test, where appropriate. The Test System shall enable the stimulus signals in the test case to be adjusted to within the specified tolerance and the equipment under test to be measured with an uncertainty not exceeding the specified values. All tolerances and uncertainties are absolute values, and are valid for a confidence level of 95 %, unless otherwise stated.

A confidence level of 95% is the measurement uncertainty tolerance interval for a specific measurement that contains 95% of the performance of a population of test equipment.

For RF tests, it should be noted that the uncertainties in subclause 4.1.2 apply to the Test System operating into a nominal 50 ohm load and do not include system effects due to mismatch between the DUT and the Test System.

### 4.1.2.1 Measurement of transmitter

Subclause	Maximum Test System Uncertainty	Derivation of Test System Uncertainty
6.2. Base station output	±0.7 dB, f ≤ 3.0GHz	
power	±1.0 dB, 3.0GHz < f ≤ 4.2GHz	
6.3.2 Total power dynamic	± 0.4 dB	Relative error of two OFDM
range		Symbol TX power (OSTP)
5		measurements
6.4.1 Transmitter OFF	±2.0 dB, f ≤ 3.0GHz	
power	±2.5 dB, 3.0GHz < f ≤ 4.2GHz	
6.4.2 Transmitter transient	N/A	
period		
6.5.1 Frequency error	± 12 Hz	
6.5.2 EVM	±1%	
6.5.3 Time alignment error	± 25 ns	
6.5.4 DL RS power	±0.8 dB, f ≤ 3.0GHz	
·	±1.1 dB, 3.0GHz < f ≤ 4.2GHz	
6.6.1 Occupied bandwidth	1.4MHz, 3MHz Channel BW: 30kHz	
	5MHz, 10MHz Channel BW: 100kHz	
	15MHz, ≥20MHz: Channel BW: 300kHz	
6.6.2 Adjacent Channel	ACLR ±0.8 dB	
Leakage power Ratio	Absolute power ±2.0 dB, f ≤ 3.0GHz	
(ACLR)	Absolute power ±2.5 dB, 3.0GHz < f ≤ 4.2GHz	
	CACLR±0.8 dB	
	Absolute power $\pm 2.0$ dB, f $\leq 3.0$ GHz	
	Absolute power ±2.5 dB, 3.0GHz < f ≤ 4.2GHz	
6.6.3 Operating band	±1.5 dB, f ≤ 3.0GHz	
unwanted emissions	±1.8 dB, 3.0GHz < f ≤ 4.2GHz	
6.6.4.5.1 Transmitter	9 kHz < f ≤ 4 GHz: ±2.0 dB	
spurious emissions,	4 GHz < f ≤ 19 GHz: ±4.0 dB	
Mandatory Requirements		
6.6.4.5.2 Transmitter	9 kHz < f ≤ 4 GHz:±2.0 dB	
spurious emissions,	4 GHz < f ≤ 19 GHz:±4.0 dB	
Mandatory Requirements		
6.6.4.5.3 Transmitter	±3.0 dB	
spurious emissions,		
Protection of BS receiver		
6.6.4.5.4 Transmitter	$\pm 2.0 \text{ dB for} > -60 \text{dBm}, f \le 3.0 \text{GHz}$	
spurious emissions,	±2.5 dB, 3.0GHz < f ≤ 4.2GHz	
Additional spurious	$\pm 3.0 \text{ dB for} \leq -60 \text{dBm}, f \leq 3.0 \text{GHz}$	
emissions requirements	±3.5 dB, 3.0GHz < f ≤ 4.2GHz	
6.6.4.5.5 Transmitter	± 3.0 dB	
spurious emissions, Co-		
location		
6.7 Transmitter	The value below applies only to the interference signal	The uncertainty of interferer has
intermodulation (interferer	and is unrelated to the measurement uncertainty of the	double the effect on the result
requirements)	tests (6.6.2, 6.6.3 and 6.6.4) which have to be carried	due to the frequency offset.
	out in the presence of the interferer.	
	. 1.0 dD	
	±1,0 dB	

Table 4.1.2-1: Maximum Test S	vstem Uncertainty	of for transmitter tests
	ystern oncertainty	

### 4.1.2.2 Measurement of receiver

#### Table 4.1.2-2: Maximum Test System Uncertainty for receiver tests

Subclause	Maximum Test System Uncertainty <sup>1</sup>	Derivation of Test System Uncertainty
7.2 Reference sensitivity	±0.7 dB, f ≤ 3.0GHz	
level	±1.0 dB, 3.0GHz < f ≤ 4.2GHz	

7.3 Dynamic range	±0.3 dB	Overall system uncertainty for static conditions is equal to signal-to-noise ratio uncertainty. Signal-to-noise ratio uncertainty ±0.3 dB
		Definitions of signal-to-noise ratio, AWGN and related constraints are given in Table 4.1.2-3.
7.4 In-channel selectivity	±1.4 dB, f ≤ 3.0GHz ±1.8 dB, 3.0GHz < f ≤ 4.2GHz	Overall system uncertainty comprises three quantities: 1. Wanted signal level error
		<ol> <li>Interferer signal level error</li> <li>Additional impact of interferer leakage</li> </ol>
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared to provide the ratio error of the two signals. The interferer leakage effect is systematic, and is added aritmetically.
		Test System uncertainty = [SQRT (wanted_level_error <sup>2</sup> + interferer_level_error <sup>2</sup> )] + leakage effect.
		$\label{eq:started} \begin{array}{l} f \leq 3.0 GHz \\ Wanted signal level \pm 0.7 dB \\ Interferer signal level \pm 0.7 dB \\ 3.0 GHz < f \leq 4.2 GHz \\ Wanted signal level \pm 1.0 dB \\ Interferer signal level \pm 1.0 dB \end{array}$
		f ≤ 4.2GHz Impact of interferer leakage 0.4dB.

7.5 Adjacent Channel Selectivity (ACS) and	±1.4 dB, f ≤ 3.0GHz ±1.8 dB, 3.0GHz < f ≤ 4.2GHz	Overall system uncertainty comprises three quantities:
narrow-band blocking		<ol> <li>Wanted signal level error</li> <li>Interferer signal level error</li> <li>Additional impact of interferer ACLR</li> </ol>
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared to provide the ratio error of the two signals. The interferer ACLR effect is systematic, and is added aritmetically.
		Test System uncertainty = [SQRT (wanted_level_error <sup>2</sup> + interferer_level_error <sup>2</sup> )] + ACLR effect.
		$f \le 3.0$ GHz Wanted signal level $\pm 0.7$ dB Interferer signal level $\pm 0.7$ dB $3.0$ GHz < $f \le 4.2$ GHz Wanted signal level $\pm 1.0$ dB Interferer signal level $\pm 1.0$ dB
		f ≤ 4.2GHz Impact of interferer ACLR 0.4dB. See Note 2.

7.6.5.2 Blocking (Co- location with other base stations)	In-band blocking, using modulated interferer:         ±1.6 dB, f ≤ 3.0GHz         ±2.0 dB, 3.0GHz < f ≤ 4.2GHz	Overall system uncertainty can have these contributions:1. Wanted signal level error2. Interferer signal level error3. Interferer ACLR4. Interferer broadband noiseItems 1 and 2 are assumed to be uncorrelated so can be root sum squared to provide the ratio error of the two signals. The Interferer ACLR or Broadband noise effect is 
location with other base	±2.5 dB, f ≤ 3.0GHz	Broadband noise 0.1dBCo-location blocking, using CW interferer: $f \le 3.0$ GHz $f \le 3.0$ GHzWanted signal level $\pm 0.7$ dB $3.0$ GHz < f $\le 4.2$ GHzWanted signal level $\pm 1.0$ dB
7.7 Deceiver and		f ≤ 4.2GHz Interferer signal level: ± 2.0dB Interferer ACLR not applicable Impact of interferer Broadband noise 0.4dB
7.7 Receiver spurious emissions	30 MHz $\leq$ f $\leq$ 4 GHz: $\pm$ 2.0 dB 4 GHz $<$ f $\leq$ 19 GHz: $\pm$ 4.0 dB	
emissions	4 GHZ < I ≤ 19 GHZ. ±4.0 ub	

700	·			
7.8 Receiver intermodulation	on	±1.8 dB, f ≤ 3.0GHz ±2.4 dB, 3.0GHz < f ≤ 4.2GHz	7	Overall system uncertainty comprises four quantities:
	5		_	<ol> <li>Wanted signal level error</li> <li>CW Interferer level error</li> <li>Modulated Interferer level error</li> <li>Impact of interferer ACLR</li> </ol>
				The effect of the closer CW signal has twice the effect.
				Items 1, 2 and 3 are assumed to be uncorrelated so can be root sum squared to provide the combined effect of the three signals. The interferer ACLR effect is systematic, and is added aritmetically.
				Test System uncertainty = SQRT [(2 x CW_level_error) <sup>2</sup> +(mod interferer_level_error) <sup>2</sup> +(wanted signal_level_error) <sup>2</sup> ] + ACLR effect.
				$\label{eq:constraint} \begin{array}{l} f \leq 3.0 \mathrm{GHz} \\ \text{Wanted signal level } \pm 0.7 \mathrm{dB} \\ \text{CW Interferer level } \pm 0.5 \mathrm{dB} \\ \text{Mod Interferer level } \pm 0.7 \mathrm{dB} \\ 3.0 \mathrm{GHz} < f \leq 4.2 \mathrm{GHz} \\ \text{Wanted signal level } \pm 1.0 \mathrm{dB} \\ \text{CW Interferer level } \pm 0.7 \mathrm{dB} \\ \text{Mod Interferer level } \pm 1.0 \mathrm{dB} \\ \end{array}$
				f ≤ 4.2GHz Impact of interferer ACLR 0.4dB
		noted, only the Test System s		
Note 2: The a) b)	e Test equipm The wanted The same wa according to	easurements due to finite test ent ACLR requirement for a sp signal to noise ratio for Referen anted signal to (noise + interfer the ACS test conditions	becified uncertainty contribunce sensitivity is calculated rence) ratio is then assume	ution is calculated as below: I based on a 5dB noise figure ed at the desensitisation level
c) d)	channel inter	subtracted from the total (noise ference. From this an equivale tion from the Test equipment A	ent BS ACS figure can be c	btained
e)	interference.		uipment ACLR which is 10	.2 dB bettter than the BS ACS
	ljacent channel			
E-l	UTRA 3MHz cł	channel bandwidth: 56dB hannel bandwidth: 56dB hannel bandwidth and above:	56dB	
E-l E-l	UTRA 3MHz cł	<u>cking</u> channel bandwidth: 65dB hannel bandwidth: 61dB hannel bandwidth and above:	59dB	

# 4.1.2.3 Measurement of performance requirement

### Table 4.1.2-3: Maximum Test System Uncertainty for Performance Requirements

Subclause	Maximum Test System Uncertainty <sup>1</sup>	Derivation of Test System Uncertainty
8.2.1 Performance requirements of PUSCH in multipath fading propagation	± 0.6 dB	Overall system uncertainty for fading conditions comprises two quantities:
conditions transmission on single antenna port		<ol> <li>Signal-to-noise ratio uncertainty</li> <li>Fading profile power uncertainty</li> </ol>
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty <sup>2</sup> + Fading profile power uncertainty <sup>2</sup> )]
		Signal-to-noise ratio uncertainty $\pm 0.3$ dB Fading profile power uncertainty $\pm 0.5$ dB
8.2.1A Performance requirements of PUSCH in multipath fading propagation conditions transmission on two antenna	± 0.8 dB	Overall system uncertainty for fading conditions comprises two quantities:
ports		<ol> <li>Signal-to-noise ratio uncertainty</li> <li>Fading profile power uncertainty</li> </ol>
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty <sup>2</sup> + Fading profile power uncertainty <sup>2</sup> )]
		Signal-to-noise ratio uncertainty $\pm 0.3$ dB Fading profile power uncertainty $\pm 0.7$ dB for MIMO
8.2.2 Performance requirements for UL timing adjustment	± 0.6 dB	Overall system uncertainty for fading conditions comprises two quantities:
		<ol> <li>Signal-to-noise ratio uncertainty</li> <li>Fading profile power uncertainty</li> </ol>
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty <sup>2</sup> + Fading profile power uncertainty <sup>2</sup> )]
		Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.5 dB
	± 0.3 dB	Overall system uncertainty for static conditions is equal to signal-to-noise ratio uncertainty.
		Signal-to-noise ratio uncertainty ±0.3 dB

	0.0.15	
8.2.3 Performance requirements for HARQ-ACK multiplexed on PUSCH	± 0.6 dB	Overall system uncertainty for fading conditions comprises two quantities:
		<ol> <li>Signal-to-noise ratio uncertainty</li> <li>Fading profile power uncertainty</li> </ol>
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty <sup>2</sup> + Fading profile power uncertainty <sup>2</sup> )]
		Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.5 dB
8.2.4 Performance requirements for High Speed Train conditions	± 0.3 dB	Overall system uncertainty for static conditions is equal to signal-to-noise ratio uncertainty.
		Signal-to-noise ratio uncertainty ±0.3 dB
8.3.1 ACK missed detection for single user PUCCH format 1a transmission on	± 0.6 dB	Overall system uncertainty for fading conditions comprises two quantities:
single antenna port		<ol> <li>Signal-to-noise ratio uncertainty</li> <li>Fading profile power uncertainty</li> </ol>
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty <sup>2</sup> + Fading profile power uncertainty <sup>2</sup> )]
		Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.5 dB
8.3.2 CQI missed detection for PUCCH format 2 transmission on single antenna	± 0.6 dB	Overall system uncertainty for fading conditions comprises two quantities:
port		<ol> <li>Signal-to-noise ratio uncertainty</li> <li>Fading profile power uncertainty</li> </ol>
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty <sup>2</sup> + Fading profile power uncertainty <sup>2</sup> )]
		Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.5 dB
8.3.3 ACK missed detection for multi user PUCCH format 1a	± 0.6 dB	Overall system uncertainty for fading conditions comprises two quantities:
		<ol> <li>Signal-to-noise ratio uncertainty</li> <li>Fading profile power uncertainty</li> </ol>
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty <sup>2</sup> + Fading profile power uncertainty <sup>2</sup> )]
		Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.5 dB

8.3.4 ACK missed detection for PUCCH	± 0.6 dB	Overall system uncertainty for fading
format 1b with Channel Selection	± 0.0 dB	conditions comprises two quantities:
		<ol> <li>Signal-to-noise ratio uncertainty</li> <li>Fading profile power uncertainty</li> </ol>
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty <sup>2</sup> + Fading profile power uncertainty <sup>2</sup> )]
		Signal-to-noise ratio uncertainty $\pm 0.3$ dB Fading profile power uncertainty $\pm 0.5$ dB
8.3.5 ACK missed detection for PUCCH format 3	± 0.6 dB	Overall system uncertainty for fading conditions comprises two quantities:
		<ol> <li>Signal-to-noise ratio uncertainty</li> <li>Fading profile power uncertainty</li> </ol>
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty <sup>2</sup> + Fading profile power uncertainty <sup>2</sup> )]
		Signal-to-noise ratio uncertainty $\pm 0.3$ dB Fading profile power uncertainty $\pm 0.5$ dB
8.3.6 NACK to ACK detection for PUCCH format 3	± 0.6 dB	Overall system uncertainty for fading conditions comprises two quantities:
		<ol> <li>Signal-to-noise ratio uncertainty</li> <li>Fading profile power uncertainty</li> </ol>
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty <sup>2</sup> + Fading profile power uncertainty <sup>2</sup> )]
		Signal-to-noise ratio uncertainty $\pm 0.3$ dB Fading profile power uncertainty $\pm 0.5$ dB
8.3.7 ACK missed detection for PUCCH format 1a transmission on two antenna	± 0.8 dB	Overall system uncertainty for fading conditions comprises two quantities:
ports		<ol> <li>Signal-to-noise ratio uncertainty</li> <li>Fading profile power uncertainty</li> </ol>
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty <sup>2</sup> + Fading profile power uncertainty <sup>2</sup> )]
		Signal-to-noise ratio uncertainty $\pm 0.3$ dB Fading profile power uncertainty $\pm 0.7$ dB for Tx diversity

8.3.8 CQI performance requirements for PUCCH format 2 transmission on two antenna ports	± 0.8 dB	Overall system uncertainty for fading conditions comprises two quantities: 1. Signal-to-noise ratio uncertainty
		<ul><li>2. Fading profile power uncertainty</li><li>Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:</li></ul>
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty <sup>2</sup> + Fading profile power uncertainty <sup>2</sup> )]
		Signal-to-noise ratio uncertainty $\pm 0.3$ dB Fading profile power uncertainty $\pm 0.7$ dB for Tx diversity
8.3.9 CQI performance requirements for PUCCH format 2 with DTX detection	± 0.6 dB for one antenna port	Overall system uncertainty for fading conditions comprises two quantities:
	± 0.8 dB for two antenna ports	<ol> <li>Signal-to-noise ratio uncertainty</li> <li>Fading profile power uncertainty</li> </ol>
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty <sup>2</sup> + Fading profile power uncertainty <sup>2</sup> )]
		Signal-to-noise ratio uncertainty $\pm 0.3$ dB Fading profile power uncertainty $\pm 0.5$ dB for transmission on one antenna port and $\pm 0.7$ dB for transmission on two antenna ports
8.4.1 PRACH false alarm probability and missed detection	± 0.6 dB	Overall system uncertainty for fading conditions comprises two quantities:
		<ol> <li>Signal-to-noise ratio uncertainty</li> <li>Fading profile power uncertainty</li> </ol>
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared:
		Test System uncertainty = [SQRT (Signal-to- noise ratio uncertainty <sup>2</sup> + Fading profile power uncertainty <sup>2</sup> )]
		Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.5 dB
	± 0.3 dB	Overall system uncertainty for static conditions is equal to signal-to-noise ratio uncertainty.
		Signal-to-noise ratio uncertainty ±0.3 dB

AWGN Bandwidth	≥ 1.08MHz, 2.7MHz, 4.5MHz, 9MHz, 13.5MHz, 18MHz;		
	N <sub>RB</sub> x 180kHz according to BW <sub>Config</sub>		
AWGN absolute power uncertainty, averaged over	±1.5 dB		
BW <sub>Config</sub>			
AWGN flatness and signal flatness, max deviation for any Resource Block, relative to average over BW <sub>Config</sub>	±2 dB		
AWGN flatness over BW <sub>Channel</sub> , max deviation for any	+2 dB		
Resource Block, relative to average over BW <sub>Config</sub>			
AWGN flatness and signal flatness, max difference	±0.5 dB		
between adjacent Resource Blocks			
AWGN peak to average ratio	≥10 dB @0.001%		
Signal-to noise ratio uncertainty, averaged over uplink	±0.3 dB		
transmission Bandwidth			
Fading profile power uncertainty	Test-specific		
Fading profile delay uncertainty, relative to frame	±5 ns (excludes absolute errors related to baseband		
timing	timing)		

4.1.3 Interpretation of measurement results

The measurement results returned by the Test System are compared - without any modification - against the Test Requirements as defined by the Shared Risk principle.

The Shared Risk principle is defined in ITU-R M.1545 [3].

The actual measurement uncertainty of the Test System for the measurement of each parameter shall be included in the test report.

The recorded value for the Test System uncertainty shall be, for each measurement, equal to or lower than the appropriate figure in subclause 4.1.2 of this specification.

If the Test System for a test is known to have a measurement uncertainty greater than that specified in subclause 4.1.2, it is still permitted to use this apparatus provided that an adjustment is made as follows.

Any additional uncertainty in the Test System over and above that specified in subclause 4.1.2 shall be used to tighten the Test Requirement, making the test harder to pass. (For some tests e.g. receiver tests, this may require modification of stimulus signals). This procedure (defined in Annex G) will ensure that a Test System not compliant with subclause 4.1.2 does not increase the chance of passing a device under test where that device would otherwise have failed the test if a Test System compliant with subclause 4.1.2 had been used.

### 4.2 Base station classes

The requirements in this specification apply to Wide Area Base Station, Medium Range Base Station, Local Area Base Station and Home Base Station unless other wise stated.

Wide Area Base Stations are characterised by requirements derived from Macro Cell scenarios with a BS to UE minimum coupling loss equals to 70 dB. The Wide Area Base Station class has the same requirements as the base station for General Purpose application in Release 8.

Medium Range Base Stations are characterised by requirements derived from Micro Cell scenarios with a BS to UE minimum coupling loss equals to 53 dB.

Local Area Base Stations are characterised by requirements derived from Pico Cell scenarios with a BS to UE minimum coupling loss equal to 45 dB.

Home Base Stations are characterised by requirements derived from Femto Cell scenarios.

The manufacturer shall declare the intended class of the BS under test.

# 4.3 Regional requirements

Some requirements in the present document may only apply in certain regions either as optional requirements or set by local and regional regulation as mandatory requirements. It is normally not stated in the 3GPP specifications under what exact circumstances that the requirements apply, since this is defined by local or regional regulation.

Table 4.3-1 lists all requirements that may be applied differently in different regions.

Clause number	Requirement	Comments	
5.5	Operating bands	Some bands may be applied regionally.	
5.6	Channel bandwidth	Some channel bandwidths may be applied regionally.	
5.7	Channel arrangement	The requirement is applied according to what operating bands in Clause 5.5 that are supported by the BS.	
6.2.	Base station maximum output power	In certain regions, the minimum requirement for normal conditions may apply also for some conditions outside the range of conditions defined as normal. In certain regions, additional regional requirement specified in subclause 6.2.2 in [1] is applied for rated output power declared by the manufacturer.	
6.6.3.5.1	Operating band unwanted emissions (Category A)	This requirement is mandatory for regions where Category A limits for spurious emissions, as defined in ITU-R Recommendation SM.329 [5] apply.	
6.6.3.5.2	Operating band unwanted emissions (Category B)	This requirement is mandatory for regions where Category B limits for spurious emissions, as defined in ITU-R Recommendation SM.329 [5], apply.	
6.6.3.5.3	Additional requirements	These requirements may apply in certain regions as additional Operating band unwanted emission limits.	
6.6.4.5.1	Spurious emissions (Category A)	This requirement is mandatory for regions where Category A limits for spurious emissions, as defined in ITU-R Recommendation SM.329 [5] apply.	
6.6.4.5.2	Spurious emissions (Category B)	This requirement is mandatory for regions where Category B limits for spurious emissions, as defined in ITU-R Recommendation SM.329 [5], apply.	
6.6.4.5.4	Additional spurious emission requirements	These requirements may be applied for the protection of system operating in frequency ranges other than the E-UTRA BS operating band.	
6.6.4.5.5	Co-location with other base stations	These requirements may be applied for the protection of other BS receivers when a BS operating in another frequency band is co-located with an E-UTRA BS.	
6.7.2A	Additional requirements for Band 41	These requirements may apply in certain regions for Band 41.	
6.7.6	Additional test requirements for Band 41	These requirements may apply in certain regions for Band 41.	
7.6.5.2	Co-location with other base stations	These requirements may be applied for the protection of the BS receivers when a BS operating in another frequency band is co located with an E-UTRA BS.	

Table 4.3-1: List of region	nal requirements
-----------------------------	------------------

# 4.4 Selection of configurations for testing

Most tests in the present document are only performed for a subset of the possible combinations of test conditions. For instance:

- Not all transceivers in the configuration may be specified to be tested;
- Only one RF channel may be specified to be tested;
- Not all channel bandwidths may be specified to be tested.

# 4.5 BS Configurations

### 4.5.1 Transmit configurations

Unless otherwise stated, the transmitter characteristics in clause 6 are specified at the BS antenna connector (test port A) with a full complement of transceivers for the configuration in normal operating conditions. If any external apparatus such as a TX amplifier, a filter or the combination of such devices is used, requirements apply at the far end antenna connector (test port B).

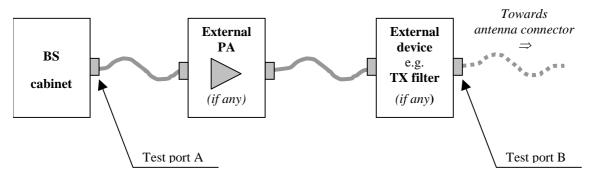


Figure 4.5-1: Transmitter test ports

#### 4.5.1.1 Transmission with multiple transmitter antenna connectors

Unless otherwise stated, for the tests in clause 6 of the present document, the requirement applies for each transmitter antenna connector in the case of transmission with multiple transmitter antenna connectors.

Transmitter requirements are tested at the antenna connector, with the remaining antenna connector(s) being terminated. If the manufacturer has declared the transmitter paths to be equivalent, it is sufficient to measure the signal at any one of the transmitter antenna connectors,.

### 4.5.2 Receive configurations

Unless otherwise stated, the receiver characteristics in clause 7 are specified at the BS antenna connector (test port A) with a full complement of transceivers for the configuration in normal operating conditions. If any external apparatus such as a RX amplifier, a filter or the combination of such devices is used, requirements apply at the far end antenna connector (test port B).

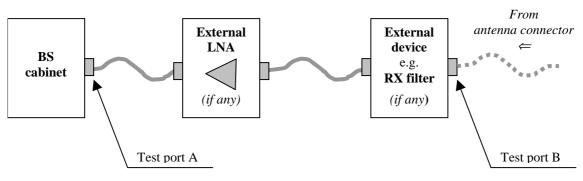


Figure 4.5-2: Receiver test ports

#### 4.5.2.1 Reception with multiple receiver antenna connectors, receiver diversity

For the tests in clause 7 of the present document, the requirement applies at each receiver antenna connector for receivers with antenna diversity or in the case of multi-carrier reception with multiple receiver antenna connectors.

Receiver requirements are tested at the antenna connector, with the remaining receiver(s) disabled or their antenna connector(s) being terminated. If the manufacturer has declared the receiver paths to be equivalent, it is sufficient to apply the specified test signal at any one of the receiver antenna connectors.

For a multi-band BS, multi-band tests for ACS, blocking and intermodulation are performed with the interferer(s) applied to each antenna connector mapped to the receiver for the wanted signal(s), however only to one antenna at a time. Antenna connectors to which no signals are applied are terminated.

### 4.5.3 Duplexers

The requirements of the present document shall be met with a duplexer fitted, if a duplexer is supplied as part of the BS. If the duplexer is supplied as an option by the manufacturer, sufficient tests should be repeated with and without the duplexer fitted to verify that the BS meets the requirements of the present document in both cases.

The following tests shall be performed with the duplexer fitted, and without it fitted if this is an option:

- 1) subclause 6.2, base station output power, for the highest static power step only, if this is measured at the antenna connector;
- 2) subclause 6.6, unwanted emissions; outside the BS transmit band;
- 3) subclause 6.6.4.5.3, protection of the BS receiver;
- 4) subclause 6.7, transmit intermodulation; for the testing of conformance, the carrier frequencies should be selected to minimize intermodulation products from the transmitters falling in receive channels.

The remaining tests may be performed with or without the duplexer fitted.

- NOTE 1: When performing receiver tests with a duplexer fitted, it is important to ensure that the output from the transmitters does not affect the test apparatus. This can be achieved using a combination of attenuators, isolators and filters.
- NOTE 2: When duplexers are used, intermodulation products will be generated, not only in the duplexer but also in the antenna system. The intermodulation products generated in the antenna system are not controlled by 3GPP specifications, and may degrade during operation (e.g. due to moisture ingress). Therefore, to ensure continued satisfactory operation of a BS, an operator will normally select EARFCNs to minimize intermodulation products falling on receive channels. For testing of complete conformance, an operator may specify the EARFCNs to be used.

### 4.5.4 Power supply options

If the BS is supplied with a number of different power supply configurations, it may not be necessary to test RF parameters for each of the power supply options, provided that it can be demonstrated that the range of conditions over

which the equipment is tested is at least as great as the range of conditions due to any of the power supply configurations.

This applies particularly if a BS contains a DC rail which can be supplied either externally or from an internal mains power supply. In this case, the conditions of extreme power supply for the mains power supply options can be tested by testing only the external DC supply option. The range of DC input voltages for the test should be sufficient to verify the performance with any of the power supplies, over its range of operating conditions within the BS, including variation of mains input voltage, temperature and output current.

# 4.5.5 Ancillary RF amplifiers

The requirements of the present document shall be met with the ancillary RF amplifier fitted. At tests according to clauses 6 and 7 for TX and RX respectively, the ancillary amplifier is connected to the BS by a connecting network (including any cable(s), attenuator(s), etc.) with applicable loss to make sure the appropriate operating conditions of the ancillary amplifier and the BS. The applicable connecting network loss range is declared by the manufacturer. Other characteristics and the temperature dependence of the attenuation of the connecting network are neglected. The actual attenuation value of the connecting network is chosen for each test as one of the applicable extreme values. The lowest value is used unless otherwise stated.

Sufficient tests should be repeated with the ancillary amplifier fitted and, if it is optional, without the ancillary RF amplifier to verify that the BS meets the requirements of the present document in both cases.

When testing, the following tests shall be repeated with the optional ancillary amplifier fitted according to the table below, where x denotes that the test is applicable:

Receiver Tests	Subclause	TX amplifier only	RX amplifier only	TX/RX amplifiers combined (Note)
	7.2		Х	Х
	7.5 (Narrowband blocking)		Х	Х
	7.6		Х	Х
	7.7		Х	Х
	7.8		Х	
Transmitter	6.2	Х		Х
Tests	6.6.1	Х		Х
	6.6.2	Х		Х
	6.6.3	Х		Х
	6.6.4	Х		Х
	6.7	Х		Х

Table 4.5-1: Tests applicable to Ancillary RF Amplifiers

NOTE: Combining can be by duplex filters or any other network. The amplifiers can either be in RX or TX branch or in both. Either one of these amplifiers could be a passive network.

In test according to subclauses 6.2 and 7.2 highest applicable attenuation value is applied.

### 4.5.6 BS with integrated luant BS modem

Unless otherwise stated, for the tests in the present document, the integrated Iuant BS modem shall be switched off. Spurious emissions according to clauses 6.6.4 and 7.7 shall be measured only for frequencies above 20MHz with the integrated Iuant BS modem switched on.

### 4.5.7 BS using antenna arrays

A BS may be configured with a multiple antenna port connection for some or all of its transceivers or with an antenna array related to one cell (not one array per transceiver). This subclause applies to a BS which meets at least one of the following conditions:

- the transmitter output signals from one or more transceiver appear at more than one antenna port; or

- there is more than one receiver antenna port for a transceiver or per cell and an input signal is required at more than one port for the correct operation of the receiver thus the outputs from the transmitters as well as the inputs to the receivers are directly connected to several antennas (known as "aircombining"); or
- transmitters and receivers are connected via duplexers to more than one antenna.

In case of diversity or spatial multiplexing, multiple antennas are not considered as an antenna array.

If a BS is used, in normal operation, in conjunction with an antenna system which contains filters or active elements which are necessary to meet the E-UTRA requirements, the conformance tests may be performed on a system comprising the BS together with these elements, supplied separately for the purposes of testing. In this case, it must be demonstrated that the performance of the configuration under test is representative of the system in normal operation, and the conformance assessment is only applicable when the BS is used with the antenna system.

For conformance testing of such a BS, the following procedure may be used.

#### 4.5.7.1 Receiver tests

For each test, the test signals applied to the receiver antenna connectors shall be such that the sum of the powers of the signals applied equals the power of the test signal(s) specified in the test.

An example of a suitable test configuration is shown in figure 4.5.7.1-1.

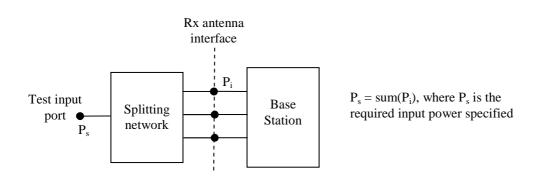



Figure 4.5.7.1-1: Receiver test set-up

For spurious emissions from the receiver antenna connector, the test may be performed separately for each receiver antenna connector.

#### 4.5.7.2 Transmitter tests

For each test, the test signals applied to the transmitter antenna connectors ( $\mathbf{P}_i$ ) shall be such that the sum of the powers of the signals applied equals the power of the test signal(s) ( $\mathbf{P}_s$ ) specified in the test. This may be assessed by separately measuring the signals emitted by each antenna connector and summing the results, or by combining the signals and performing a single measurement. The characteristics (e.g. amplitude and phase) of the combining network should be such that the power of the combined signal is maximised.

An example of a suitable test configuration is shown in figure 4.5.7.2-1.

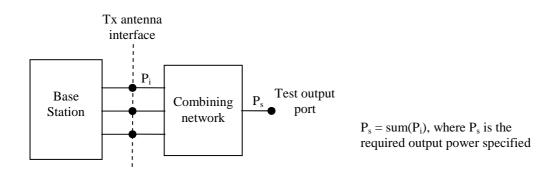

#### Figure 4.5.7.2-1: Transmitter test set-up

For Intermodulation attenuation, the test may be performed separately for each transmitter antenna connector.

# 4.6 Manufacturer"s declarations of regional and optional requirements

### 4.6.1 Operating band and frequency range

The manufacturer shall declare which operating band(s) specified in clause 5.5 that is supported by the BS under test and if applicable, which frequency ranges within the operating band(s) that the base station can operate in. Requirements for other operating bands and frequency ranges need not be tested.

The manufacturer shall declare which operating band(s) specified in clause 5.5 are supported by the BS under test for carrier aggregation.

### 4.6.2 Channel bandwidth

The manufacturer shall declare which of the channel bandwidths specified in TS36.104 [2] subclause 5.6 that are supported by the BS under test. Requirements for other channel bandwidths need not be tested.

### 4.6.3 Base station output power

The manufacturer shall declare for the BS under test the rated output power for each supported transmit channel bandwidth.

### 4.6.4 Spurious emissions Category

The manufacturer shall declare one of the following:

- a) The BS is tested against Category A limits for spurious emissions, as defined in ITU-R Recommendation SM.329 [5]. In this case
  - conformance with the operating band unwanted emissions requirements in clause 6.6.3.5.1 is mandatory, and the requirements specified in clause 6.6.3.5.2 need not be tested..
  - conformance with the spurious emissions requirements in clause 6.6.4.5.1 is mandatory, and the requirements specified in clause 6.6.4.5.2 need not be tested.
- b) The BS is tested against Category B limits for spurious emissions, as defined in ITU-R Recommendation SM.329 [5]. In this case,

- conformance with the operating band unwanted emissions requirements in clause 6.6.3.5.2 is mandatory, and the requirements specified in clause 6.6.3.5.1 need not be tested.
- conformance with the spurious emissions requirements in clause 6.6.4.5.2 is mandatory, and the requirements specified in clause 6.6.4.5.1 need not be tested.

### 4.6.5 Additional operating band unwanted emissions

The manufacturer shall declare whether the BS under test is intended to operate in geographic areas where the additional operating band unwanted emission limits defined in clause 6.6.3.5.3 apply. If this is the case, compliance with the test requirement specified in Tables 6.6.3.5.3-1, 6.6.3.5.3-2 or 6.6.3.5.3-3 are mandatory; otherwise these requirements need not be tested.

For a BS declared to support Band 20 and to operate in geographic areas within the CEPT in which frequencies are allocated to broadcasting (DTT) service, the manufacturer shall additionally declare the following quantities associated with the applicable test conditions of Table 6.6.3.5.3-4 and information in annex G of [2] :

 $P_{EM,N}$  Declared emission level for channel N

P<sub>10MHz</sub> Maximum output Power in 10 MHz

For a BS declared to support Band 24 and intended to operate in geographic areas in which the conditions for emissions falling into the 1559-1610 MHz band according to FCC Order DA 10-534 apply, the manufacturer shall additionally declare the following quantities associated with the applicable test conditions of Table 6.6.4.5.4-4:

 $P_{E_1kHz}$  Declared emission level (measurement bandwidth = 1kHz)

 $P_{E_1MHz}$  Declared emission level (measurement bandwidth = 1MHz)

### 4.6.6 Co-existence with other systems

The manufacturer shall declare whether the BS under test is intended to operate in geographic areas where one or more of the systems GSM850, GSM900, DCS1800, PCS1900, UTRA FDD, UTRA TDD, E-UTRA and/or PHS operating in another band are deployed. If this is the case, compliance with the applicable test requirement for spurious emissions specified in clause 6.6.4.5.4 shall be tested.

### 4.6.7 Co-location with other base stations

The manufacturer shall declare whether the BS under test is intended to operate co-located with base stations of one or more of the systems GSM850, GSM900, DCS1800, PCS1900, UTRA FDD, UTRA TDD and/or E-UTRA operating in another band. If this is the case,

- compliance with the applicable test requirement for spurious emissions specified in clause 6.6.4.5.5 shall be tested.
- compliance with the applicable test requirement for receiver blocking specified in clause 7.6 shall be tested.

### 4.6.8 Manufacturer's declarations of supported RF configurations

The manufacturer shall declare which operational configurations the BS supports by declaring the following parameters:

- Support of the BS in non-contiguous spectrum operation. If the BS does not support non-contiguous spectrum operation below shall not be declared.
- The supported operating bands defined in subclause 5.5;
- The frequency range within the above operating band(s) supported by the BS;
- The maximum Base Station RF bandwidth supported by a BS within each operating band;
  - for contiguous spectrum operation

#### 3GPP TS 36.141 version 11.9.0 Release 11

- for non-contiguous spectrum operation
- The supported operating configurations (multi-carrier, carrier aggregation, and/or single carrier) within each operating band.
- The supported component carrier combinations at nominal channel spacing within each operating band and subblock.
- -The rated output power per carrier;
  - for contiguous spectrum operation
  - for non-contiguous spectrum operation
    - NOTE: Different rated output powers may be declared for different operating configurations.
- The rated total output power as a sum of all carriers;
  - for contiguous spectrum operation
  - for non-contiguous spectrum operation
- Maximum number of supported carriers within each band;
  - for contiguous spectrum operation
  - for non-contiguous spectrum operation

If the rated total output power and total number of supported carriers are not simultaneously supported, the manufacturer shall declare the following additional parameters:

- The reduced number of supported carriers at the rated total output power;
- The reduced total output power at the maximum number of supported carriers.

For BS capable of multi-band operation, the parameters above shall be declared for each supported operating band, in which declarations of the maximum Base Station RF bandwidth, the rated output power per carrier, the rated total output power and maximum number of supported carriers are applied for single-band operation only. In addition the manufacturer shall declare the following additional parameters for BS capable of multi-band operation:

- Supported operating band combinations of the BS
- Supported operating band(s) of each antenna connector
- Support of multi-band transmitter and/or multi-band receiver, including mapping to antenna connector(s)
- Total number of supported carriers for the declared band combinations of the BS
- Maximum number of supported carriers per band in multi-band operation
- Total RF bandwidth of transmitter and receiver for the declared band combinations of the BS
- Maximum RF bandwidth of each supported operating band in multi-band operation
- Maximum radio bandwidth in transmit and receive direction for the declared band combinations of the BS
- Any other limitations under simultaneous operation in the declared band combinations of the BS which have any impact on the test configuration generation
- Total output power as a sum over all supported operating bands in the declared band combinations of the BS
- Maximum supported power difference between any two carriers in any two different supported operating bands
- The rated output power per carrier in multi-band operation
- Rated total output power of each supported operating band in multi-band operation

# 4.7 Specified frequency range and supported channel bandwidth

Unless otherwise stated, the test shall be performed with a lowest and the highest bandwidth supported by the BS. The manufacturer shall declare that the requirements are fulfilled for all other bandwidths supported by the BS which are not tested.

The manufacturer shall declare:

- which of the operating bands defined in subclause 5.5 are supported by the BS.
- the frequency range within the above frequency band(s) supported by the BS.
- the channel bandwidths supported by the BS

For CA specific testing in section 4.7.2, the manufacturer"s declaration in section 4.6.8 will be applied.

For the single carrier testing many tests in this TS are performed with appropriate frequencies in the bottom, middle and top channels of the supported frequency range of the BS. These are denoted as RF channels B (bottom), M (middle) and T (top).

Unless otherwise stated, the test shall be performed with a single carrier at each of the RF channels B, M and T.

When a test is performed by a test laboratory, the EARFCNs to be used for RF channels B, M and T shall be specified by the laboratory. The laboratory may consult with operators, the manufacturer or other bodies.

When a test is performed by a manufacturer, the EARFCNs to be used for RF channels B, M and T may be specified by an operator.

### 4.7.1 RF bandwidth position for multi-carrier and/or CA testing

Many tests in this TS are performed with the maximum RF bandwidth located at the bottom, middle and top of the supported frequency range in each operating band. These are denoted as  $B_{RFBW}$ (bottom),  $M_{RFBW}$  (middle) and  $T_{RFBW}$  (top).

Unless otherwise stated, the test shall be performed at B<sub>RFBW</sub>, M<sub>RFBW</sub> and T<sub>RFBW</sub> defined as following:

- B<sub>RFBW</sub>: maximum RF bandwidth located at the bottom of the supported frequency range in each operating band;
- M<sub>RFBW</sub>: maximum RF bandwidth located in the middle of the supported frequency range in each operating band;
- T<sub>RFBW</sub>: maximum RF bandwidth located at the top of the supported frequency range in each operating band.

For BS capable of dual-band operation, unless otherwise stated, the test shall be performed at  $B_{RFBW}T''_{RFBW}$  and  $B''_{RFBW}T_{RFBW}$  defined as following:

- B<sub>RFBW</sub>\_ T"<sub>RFBW</sub>: the RF bandwidths located at the bottom of the supported frequency range in the lower operating band and at the highest possible simultaneous frequency position, within the maximum radio bandwidth, in the upper operating band.
- B"<sub>RFBW</sub>\_T<sub>RFBW</sub>: the RF bandwidths located at the top of the supported frequency range in the upper operating band and at the lowest possible simultaneous frequency position, within the maximum radio bandwidth, in the lower operating band.
- NOTE:  $B_{RFBW}T"_{RFBW} = B"_{RFBW}T_{RFBW} = B_{RFBW}T_{RFBW}$  when the declared maximum radio bandwidth spans both operating bands.  $B_{RFBW}T_{RFBW}$  means the RF bandwidths are located at the bottom of the supported frequency range in the lower operating band and at the top of the supported frequency range in the upper operating band.

When a test is performed by a test laboratory, the position of  $B_{RFBW}$ ,  $M_{RFBW}$  and  $T_{RFBW}$  in each supported operating band, as well as the position of  $B_{RFBW}$ .  $T''_{RFBW}$  and  $B''_{RFBW}$ .  $T_{RFBW}$  in the supported operating band combinations, shall be specified by the laboratory. The laboratory may consult with operators, the manufacturer or other bodies.

# 4.7.2 Aggregated channel bandwidth position for Contiguous CA occupied bandwidth testing

Occupied bandwidth test in this TS is performed with the aggregated channel bandwidth located at the bottom, middle and top of the supported frequency range in the operating band. These are denoted as  $B_{BW Channel CA}$  (bottom),  $M_{BW Channel CA}$  (middle) and  $T_{BW Channel CA}$  (top) for contiguous spectrum operation.

Unless otherwise stated, the test for contiguous spectrum operation shall be performed at  $B_{BW Channel CA}$ ,  $M_{BW Channel CA}$  and  $T_{BW Channel CA}$  defined as following:

- B<sub>BW Channel CA</sub>: aggregated channel bandwidth located at the bottom of the supported frequency range in each operating band;
- M<sub>BW Channel CA</sub>: aggregated channel bandwidth located close in the middle of the supported frequency range in each operating band, with the center frequency of each component carrier aligned to the channel raster;
- T<sub>BW Channel CA</sub>: aggregated channel bandwidth located at the top of the supported frequency range in each operating band.

When a test is performed by a test laboratory, the position of  $B_{BW Channel CA}$ ,  $M_{BW Channel CA}$  and  $T_{BW Channel CA}$  for contiguous spectrum operation in the operating band shall be specified by the laboratory. The laboratory may consult with operators, the manufacturer or other bodies.

### 4.8 Format and interpretation of tests

Each test in the following clauses has a standard format:

#### X Title

All tests are applicable to all equipment within the scope of the present document, unless otherwise stated.

#### X.1 Definition and applicability

This subclause gives the general definition of the parameter under consideration and specifies whether the test is applicable to all equipment or only to a certain subset. Required manufacturer declarations may be included here.

#### X.2 Minimum Requirement

This subclause contains the reference to the subclause to the 3GPP reference (or core) specification which defines the Minimum Requirement.

#### X.3 Test Purpose

This subclause defines the purpose of the test.

#### X.4 Method of test

#### X.4.1 Initial conditions

This subclause defines the initial conditions for each test, including the test environment, the RF channels to be tested and the basic measurement set-up.

#### X.4.2 Procedure

This subclause describes the steps necessary to perform the test and provides further details of the test definition like point of access (e.g. test port), domain (e.g. frequency-span), range, weighting (e.g. bandwidth), and algorithms (e.g. averaging).

#### X.5 Test Requirement

This subclause defines the pass/fail criteria for the equipment under test. See subclause 4.1.2.5 Interpretation of measurement results.

### 4.9 Applicability of requirements

For BS that is E-UTRA (single-RAT) capable only, the requirements in the present document are applicable and additional conformance to TS 37.141 [18] is optional. For a BS additionally conforming to TS 37.141 [18], conformance to some of the RF requirements in the present document can be demonstrated through the corresponding requirements in TS 37.141 [18] as listed in Table 4.9-1

Table 4.9-1: Alternative RF test requirements for a BS additionally conforming to TS 37.141 [18]

RF requirement	Clause in the present document	Alternative clause in TS 37.141 [18]		
Base station output power	6.2.5	6.2.1.5		
Transmit ON/OFF power	6.4	6.4		
Unwanted emissions				
Transmitter spurious emissions	6.6.4.5	6.6.1.5 (except for 6.6.1.5.3)		
Operating band unwanted	6.6.3.5.1, 6.6.3.5.2	6.6.2.5 (except for		
emissions	(NOTE 1)	6.6.2.5.3 and 6.6.2.5.4)		
Transmitter intermodulation	6.7.5	6.7.5.1		
Narrowband blocking	7.5.5	7.4.5.2		
Blocking	7.6.5.1	7.4.5.1		
Out-of-band blocking	7.6.5.1	7.5.5.1		
Co-location with other base stations	7.6.5.2	7.5.5.2		
Receiver spurious emissions	7.7.5	7.6.5.1		
Intermodulation	7.8.5	7.7.5.1		
Narrowband intermodulation 7.8.5 7.7.5.2				
NOTE 1: This does not apply when the lowest or highest carrier frequency is configured as 1.4 or 3 MHz carrier in bands of Band Category 1 or 3 according to clause 4.4 in TS 37.141 [18].				

### 4.10 Test configurations for multi-carrier and/or CA operation

The test configurations shall be constructed using the methods defined below, subject to the parameters declared by the manufacturer for the supported RF configurations as listed in subclause 4.6.8. The test configurations to use for conformance testing are defined for each supported RF configuration in subclause 4.11.

The applicable test models for generation of the carrier transmit test signal are defined in subclause 6.1.1.

### 4.10.1 ETC1: Contiguous spectrum operation

The purpose of test configuration ETC1 is to test all BS requirements excluding CA occupied bandwidth.

For ETC1 used in receiver tests only the two outermost carriers within each supported operating band need to be generated by the test equipment.

#### 4.10.1.1 ETC1 generation

ETC1 shall be constructed on a per band basis using the following method:

- Declared maximum supported RF bandwidth for contiguous spectrum operation shall be used;
- Select the narrowest supported carrier and place it adjacent to the lower edge of the RF bandwidth. Place a 5 MHz carrier adjacent to the upper edge of the RF bandwidth.
- For transmitter tests, select as many 5 MHz carriers that the BS supports within a band and fit in the rest of the declared maximum supported RF bandwidth. Place the carriers adjacent to each other starting from the upper edge of the RF bandwidth. The nominal carrier spacing defined in subclause 5.7 shall apply;
- If 5 MHz carriers are not supported by the BS the narrowest supported channel BW shall be selected instead.

The test configuration should be constructed on a per band basis for all component carriers of the inter-band CA bands declared to be supported by the BS and are transmitted using the same antenna port. All configured component carriers are transmitted simultaneously in the tests where the transmitter should be on.

#### 4.10.1.2 ETC1 power allocation

For a BS declared to support MC operation,

Set the power of each carrier to the same level so that the sum of the carrier powers equals the rated total output power according to the manufacturer"s declaration in subclause 4.6.8.

For a BS declared to support only CA operation,

Set the power spectral density of each carrier to the same level so that the sum of the carrier powers equals the rated total output power according to the manufacturer"s declaration in subclause 4.6.8.

### 4.10.2 ETC2: Contiguous CA occupied bandwidth

ETC2 in thissub clause is used to test CA occupied bandwidth.

### 4.10.2.1 ETC2 generation

The CA specific test configuration should be constructed on a per band basis using the following method:

- All component carrier combinations supported by the BS, which have different sum of channel bandwidth of component carrier, shall be tested. For all component carrier combinations which have the same sum of channel bandwidth of component carriers, only one of the component carrier combinations shall be tested.
- Of all component carrier combinations which have same sum of channel bandwidth of component carrier, select those with the narrowest carrier at the lower edge.
- Of the combinations selected in the previous step, select one with the narrowest carrier at the upper edge.
- If there are multiple combinations fulfilling previous steps, select the one with the smallest number of component carrier.
- If there are multiple combinations fulfilling previous steps, select the one with the widest carrier being adjacent to the lowest carrier.
- If there are multiple combinations fulfilling previous steps, select the one with the widest carrier being adjacent to the highest carrier
- If there are multiple combinations fulfilling previous steps, select the one with the widest carrier being adjacent to the carrier which has been selected in the previous step.
- If there are multiple combinations fulfilling previous steps, repeat the previous step until there is only one combination left.
- The nominal carrier spacing defined in subclause 5.7.1A shall apply.

#### 4.10.2.2 ETC2 power allocation

Set the power spectral density of each carrier to be the same level so that the sum of the carrier powers equals the rated total output power for E-UTRA according to the manufacturer's declaration in subclause 4.6.8.

### 4.10.3 ETC3: Non-contiguous spectrum operation

The purpose of ETC3 is to test all BS requirements excluding CA occupied bandwidth.

For ETC3 used in receiver tests, outermost carriers for each sub-block need to be generated by the test equipment.

### 4.10.3.1 ETC3 generation

ETC3 is constructed on a per band basis using the following method:

- The RF bandwidth shall be the maximum supported RF bandwidth for non-contiguous spectrum operation. The RF bandwidth consists of one sub-block gap and two sub-blocks located at the edges of the declared maximum supported RF bandwidth.
- For transmitter tests, place a 5MHz carrier adjacent to the upper edge of the RF bandwidth and a 5MHz carrier adjacent to the lower edge of the RF bandwidth. If 5 MHz carriers are not supported by the BS, the narrowest supported channel BW shall be selected instead.
- For receiver tests, place a 5MHz carrier adjacent to the upper edge of the RF bandwidth and a 5MHz carrier adjacent to the lower edge of the RF bandwidth. If 5 MHz E-UTRA carriers are not supported by the BS, the narrowest supported channel BW shall be selected instead.
- For single-band operation receiver tests, if the remaining gap is at least 15 MHz plus two times the channel BW used in the previous step and the BS supports at least 4 carriers, place a carrier of this BW adjacent to each already placed carrier for each sub-block. The nominal carrier spacing defined in subclause 5.7 shall apply.
- The sub-block edges adjacent to the sub-block gap shall be determined using the specified F<sub>Offset</sub> for the carrier adjacent to the sub-block gap.

#### 4.10.3.2 ETC3 power allocation

Set the power of each carrier to the same level so that the sum of the carrier powers equals the rated total output power according to the manufacturer"s declaration in subclause 4.6.8.

#### 4.10.3.24 VOID

### 4.10.4 ETC4: Multi-band test configuration for full carrier allocation

The purpose of ETC4 is to test multi-band operation aspects considering maximum supported number of carriers.

#### 4.10.4.1 ETC4 generation

ETC4 is based on re-using the existing test configuration applicable per band involved in multi-band operation. It is constructed using the following method:

- The RF bandwidth of each supported operating band in multi-band operation shall be the declared maximum RF bandwidth of each supported operating band in multi-band operation.
- The number of carriers of each supported operating band shall be the declared maximum number of supported carriers of each supported operating band in multi-band operation. Carriers shall first be placed at the outermost edges of the declared maximum radio bandwidth. Additional carriers shall next be placed at the edges of the RF bandwidths, if possible.
- The allocated RF bandwidth of the outermost bands shall be located at the outermost edges of the declared maximum radio bandwidth.
- Each concerned band shall be considered as an independent band and the corresponding ETC1 shall be generated in each band. The mirror image of the single-band test configuration shall be used in the highest band being tested for the BS to ensure a narrowband carrier being placed at both edges of the BS maximum radio bandwidth.
- If a multi-band BS supports only 3 carriers, two carriers shall be placed in one band according to ETC1 while the remaining carrier shall be placed at the edge of the maximum radio bandwidth in the other band.
- If the sum of the maximum RF bandwidth of each supported operating bands is larger than the declared total RF bandwidth of transmitter and receiver for the declared band combinations of the BS, repeat the steps above for test configurations where the RF bandwidth of one of the operating band shall be reduced so that the total RF bandwidth of transmitter and receiver is not exceeded and vice versa.

- If the sum of the maximum number of supported carrier of each supported operating bands in multi-band operation is larger than the declared total number of supported carriers for the declared band combinations of the BS, repeat the steps above for test configurations where in each test configuration the number of carriers of one of the operating band shall be reduced so that the total number of supported carriers is not be exceeded and vice versa.

#### 4.10.4.2 ETC4 power allocation

Unless otherwise stated, set the power of each carrier in all supported operating bands to the same power so that the sum of the carrier powers equals the total output power according to the manufacturer"s declaration.

If the allocated power of a supported operating band(s) exceeds the declared rated total output power of the operating band(s) in multi-band operation, the exceeded part shall, if possible, be reallocated into the other band(s). If the power allocated for a carrier exceeds the rated output power declared for that carrier, the exceeded power shall, if possible, be reallocated into the other carriers.

### 4.10.5 ETC5: Multi-band test configuration with high PSD per carrier

The purpose of ETC5 is to test multi-band operation aspects considering higher PSD cases with reduced number of carriers.

#### 4.10.5.1 ETC5 generation

ETC5 is based on re-using the existing test configuration applicable per band involved in multi-band operation. It is constructed using the following method:

- The RF bandwidth of each supported operating band in multi-band operation shall be the declared maximum RF bandwidth of each supported operating band in multi-band operation.
- The allocated RF bandwidth of the outermost bands shall be located at the outermost edges of the declared maximum radio bandwidth.
- The maximum number of carriers is limited to two per band. Carriers shall first be placed at the outermost edges of the declared maximum radio bandwidth. Additional carriers shall next be placed at the edges of the RF bandwidths, if possible.
- Narrowest supported E-UTRA channel bandwidth shall be used in the test configuration.
- Each concerned band shall be considered as an independent band and the corresponding ETC3 shall be generated in each band. The mirror image of the single-band test configuration shall be used in the highest band being tested for the BS to ensure a narrowband carrier being placed at both edges of the BS maximum radio bandwidth.
- If the sum of the maximum RF bandwidth of each supported operating bands is larger than the declared total RF bandwidth of transmitter and receiver for the declared band combinations of the BS, repeat the steps above for test configurations where the RF bandwidth of one of the operating band shall be reduced so that the total RF bandwidth of transmitter and receiver is not exceeded and vice versa.

#### 4.10.5.2 ETC5 power allocation

Unless otherwise stated, set the power of each carrier in all supported operating bands to the same power so that the sum of the carrier powers equals the total output power according to the manufacturer"s declaration.

If the allocated power of a supported operating band(s) exceeds the declared rated total output power of the operating band(s) in multi-band operation, the exceeded part shall, if possible, be reallocated into the other band(s). If the power allocated for a carrier exceeds the rated output power declared for that carrier, the exceeded power shall, if possible, be reallocated into the other carriers.

## 4.11 Applicability of test configurations

The present subclause defines for each RF test requirement the set of mandatory test configurations which shall be used for demonstrating conformance. The applicable test configurations are specified in the tables below for each the supported RF configuration, which shall be declared according to subclause 4.6.8. The generation and power allocation for each test configuration is defined in subclause 4.10.

For a BS declared to be capable of single carrier operation only, a single carrier (SC) shall be used for testing.

For a BS declared to be capable of multi-carrier and/or CA operation in contiguous spectrum operation in single band only, the test configurations in Table 4.11-1 shall be used for testing.

# Table 4.11-1: Test configurations for a BS capable of multi-carrier and/or CA operation in contiguous spectrum in single band only

BS test case	Contiguous spectrum capable BS
6.2 Base station output power	ETC1
6.3 Output power dynamics	
6.3.1 RE Power control dynamic range	Tested with Error Vector Magnitude
6.3.2 Total power dynamic range	SC
6.4 Transmit ON/OFF power (only applied for E-UTRA TDD BS)	ETC1
6.5 Transmitted signal quality	-
6.5.1 Frequency error	Tested with Error Vector Magnitude
6.5.2 Error Vector Magnitude	ETC1
6.5.3 Time alignment error	ETC1
6.5.4 DL RS power	SC
6.6 Unwanted emissions	-
6.6.1 Occupied bandwidth	SC, ETC2 (Note)
6.6.2 Adjacent Channel Leakage power Ratio (ACLR)	ETC1
6.6.3 Operating band unwanted emissions	ETC1
6.6.4 Transmitter spurious emissions	ETC1
6.7 Transmitter intermodulation	ETC1
7.2 Reference sensitivity level	SC
7.3 Dynamic range	SC
7.4 In-channel selectivity	SC
7.5 Adjacent Channel Selectivity(ACS) and narrow-band blocking	ETC1
7.6 Blocking	ETC1
7.7 Receiver spurious emissions	ETC1
7.8 Receiver intermodulation	ETC1
Note: ETC2 is only applicable when contiguous CA is su	

For a BS declared to be capable of multi-carrier and/or CA operation in contiguous and non-contiguous spectrum in single band and where the parameters in the manufacture"s declaration according to subclause 4.6.8 are identical for contiguous (C) and non-contiguous (NC) spectrum operation, the test configurations in the second column of Table 4.11-2 shall be used for testing.

For a BS declared to be capable of multi-carrier and/or CA operation in contiguous and non-contiguous spectrum and in single band where the parameters in the manufacture's declaration according to subclause 4.6.8 are not identical for contiguous and non-contiguous spectrum operation, the test configurations in the third column of Table 4.11-2 shall be used for testing.

BS test case	C and NC capable BS with identical parameters	C and NC capable BS with different parameters
6.2 Base station output power	ETC1	ÉTC1, ETC3
6.3 Output power dynamics		
6.3.1 RE Power control dynamic	Tested with Error Vector	Tested with Error Vector
range	Magnitude	Magnitude
6.3.2 Total power dynamic range	SC	SC
6.4 Transmit ON/OFF power (only applied for E-UTRA TDD BS)	ETC1	ETC1, ETC3
6.5 Transmitted signal quality	-	-
6.5.1 Frequency error	Tested with Error Vector Magnitude	Tested with Error Vector Magnitude
6.5.2 Error Vector Magnitude	ETC1	ETC1, ETC3
6.5.3 Time alignment error	ETC1	ETC1, ETC3
6.5.4 DL RS power	SC	SC
6.6 Unwanted emissions	-	-
6.6.1 Occupied bandwidth	SC, ETC2 (Note)	SC, ETC2 (Note)
6.6.2 Adjacent Channel Leakage power Ratio (ACLR)	ETC1, ETC3	ETC1, ETC3
6.6.2.2 Cumulative ACLR requirement in non-contiguous spectrum	ETC3	ETC3
6.6.3 Operating band unwanted emissions	ETC1, ETC3	ETC1, ETC3
6.6.4 Transmitter spurious emissions	ETC3	ETC1, ETC3
6.7 Transmitter intermodulation	Same TC as used in 6.6	Same TC as used in 6.6
7.2 Reference sensitivity level	SC	SC
7.3 Dynamic range	SC	SC
7.4 In-channel selectivity	SC	SC
7.5 Adjacent Channel Selectivity(ACS) and narrow-band blocking	ETC3	ETC1, ETC3
7.6 Blocking	ETC3	ETC1, ETC3
7.7 Receiver spurious emissions	ETC3	ETC1, ETC3
7.8 Receiver intermodulation	ETC3	ETC1, ETC3
Note: ETC2 is only applicable when	n contiguous CA is supported.	

# Table 4.11-2: Test configuration for a BS capable of multi-carrier and/or CA operation in both contiguous and non-contiguous spectrum in single band

For a BS declared to be capable of multi-band operation, the test configuration in Table 4.11-3 shall be used for testing. In the case where multiple bands are mapped on common antenna connector, the test configuration in the second column of Table 4.11-3 shall be used. In the case where multiple bands are mapped on separate antenna connectors, the test configuration in the third column of Table 4.11-3 shall be used.

BS test case	Test configuration			
	Common antenna connector	Separate antenna connector		
6.2 Base station output power	ETC1/3 (Note 1), ETC4	ETC1/3 (Note 1), ETC4		
6.3 Output power dynamics				
6.3.1 RE Power control dynamic range	Tested with Error Vector Magnitude	Tested with Error Vector Magnitude		
6.3.2 Total power dynamic range	SC	SC		
6.4 Transmit ON/OFF power (only applied for E-UTRA TDD BS)	ETC4	ETC4		
6.5 Transmitted signal quality				
6.5.1 Frequency error	Tested with Error Vector Magnitude	Tested with Error Vector Magnitude		
6.5.2 Error Vector Magnitude	ETC1/3 (Note 1), ETC4	ETC1/3 (Note 1), ETC4		
6.5.3 Time alignment error	ETC1/3 (Note 1), ETC5 (Note 2)	ETC1/3 (Note 1), ETC5 (Note 2)		
6.5.4 DL RS power	SC	SC		
6.6 Unwanted emissions				
6.6.1 Occupied bandwidth	SC, ETC2 (Note 3)	SC, ETC2 (Note 3)		
6.6.2 Adjacent Channel Leakage power Ratio (ACLR)	ETC1/3 (Note 1), ETC5 (Note 4)	ETC1/3 (Note 1, 5), ETC5 (Note 4, 5)		
6.6.2.6 Cumulative ACLR requirement in non-contiguous spectrum	ETC3 (Note 1), ETC5 (Note 4)	ETC3 (Note 1, 5)		
6.6.3 Operating band unwanted emissions	ETC1/3 (Note 1), ETC5	ETC1/3 (Note 1, 5), ETC5 (Note 5)		
6.6.4 Transmitter spurious emissions	ETC1/3 (Note 1), ETC5	ETC1/3 (Note 1, 5), ETC5 (Note 5)		
6.7 Transmitter intermodulation	ETC1/3 (Note 1)	ETC1/3 (Note 1, 5)		
7.2 Reference sensitivity level	SC	SC		
7.3 Dynamic range	SC	SC		
7.4 In-channel selectivity	SC	SC		
7.5 Adjacent Channel Selectivity(ACS) and narrow-band blocking	ETC5	ETC1/3 (Note 1), ETC5 (Note 6)		
7.6 Blocking	ETC5	ETC1/3 (Note 1), ETC5 (Note 6)		
7.7 Receiver spurious emissions	ETC1/3 (Note 1), ETC5	ETC1/3 (Note 1, 5), ETC5 (Note 5)		
7.8 Receiver intermodulation ETC5 ETC1/3 (Note ETC5 (Note ETC5) (N				
Note 1:       ETC1 and/or ETC3 shall be applied in each supported of 4.11-2.         Note 2:       ETC5 is only applicable when inter-band CA is supported to 0.12 and 0.12	ed.			
Note 4:ETC5 may be applied for Inter RF bandwidth gap only.Note 5:Single-band requirement apply to each antenna connec band operation test. For single-band operation test, otherNote 6:ETC5 is only applicable for multi-band receiver.				

#### Table 4.11-3: Test configuration for a BS capable of multi-band operation

### Requirements for BS capable of multi-band operation 4.12

For BS capable of multi-band operation, the RF requirements in clause 6 and 7 apply for each supported operating band unless otherwise stated. For some requirements it is explicitly stated that specific additions or exclusions to the requirement apply for BS capable of multi-band operation.

For BS capable of multi-band operation, various structures in terms of combinations of different transmitter and receiver implementations (multi-band or single band) with mapping of transceivers to one or more antenna port(s) in different ways are possible. In the case where multiple bands are mapped on separate antenna connectors, the following applies:

- Single-band ACLR, operating band unwanted emissions, transmitter spurious emissions, transmitter intermodulation and receiver spurious emissions requirements apply to each antenna connector.
- If the BS is configured for single-band operation, single-band requirements shall apply to the antenna connector configured for single-band operation and no exclusions or provisions for multi-band capable BS are applicable. Single-band requirements are tested separately at the antenna connector configured for single-band operation, with all other antenna connectors terminated.

For a BS capable of multi-band operation supporting bands for TDD, the RF requirements in the present specification assume synchronized operation, where no simultaneous uplink and downlink occur between the supported operating bands.

# 5 Operating bands and channel arrangement

### 5.1 General

The channel arrangements presented in this clause are based on the operating bands and channel bandwidths defined in the present release of specifications.

NOTE: Other operating bands and channel bandwidths may be considered in future releases.

- 5.2 Void
- 5.3 Void
- 5.4 Void

### 5.5 Operating bands

E-UTRA is designed to operate in the operating bands defined in Table 5.5-1.

E-UTRA Operating Band	Uplink (UL) operating band BS receive UE transmit FuL_low - FuL_high		Downlink (DL) operating band BS transmit UE receive F <sub>DL_low</sub> - F <sub>DL_high</sub>			Duplex Mode	
1	1920 MHz	_	1980 MHz	2110 MHz		2170 MHz	FDD
2	1850 MHz	_	1910 MHz	1930 MHz	_	1990 MHz	FDD
3	1710 MHz	_	1785 MHz	1805 MHz	_	1880 MHz	FDD
4	1710 MHz	_	1755 MHz	2110 MHz	_	2155 MHz	FDD
5	824 MHz	_	849 MHz	869 MHz	_	894MHz	FDD
6 <sup>1</sup>	830 MHz	_	840 MHz	875 MHz	_	885 MHz	FDD
7	2500 MHz	_	2570 MHz	2620 MHz	_	2690 MHz	FDD
8	880 MHz	_	915 MHz	925 MHz	_	960 MHz	FDD
9	1749.9 MHz	_	1784.9 MHz	1844.9 MHz	_	1879.9 MHz	FDD
10	1710 MHz	_	1770 MHz	2110 MHz	_	2170 MHz	FDD
11	1427.9 MHz	_	1447.9 MHz	1475.9 MHz	_	1495.9 MHz	FDD
12	699 MHz	_	716 MHz	729 MHz	_	746 MHz	FDD
13	777 MHz	_	787 MHz	746 MHz	_	756 MHz	FDD
14	788 MHz	_	798 MHz	758 MHz	_	768 MHz	FDD
15	Reserved		700 11112	Reserved		100 101 12	FDD
16	Reserved			Reserved			FDD
17	704 MHz		716 MHz	734 MHz		746 MHz	FDD
18	815 MHz	_	830 MHz	860 MHz	_	875 MHz	FDD
19	830 MHz	_	845 MHz	875 MHz	_	890 MHz	FDD
20	832 MHz	_	862 MHz	791 MHz	_	821 MHz	FDD
21	1447.9 MHz	_	1462.9 MHz	1495.9 MHz	_	1510.9 MHz	FDD
22	3410 MHz	_	3490 MHz	3510 MHz	_	3590 MHz	FDD
23	2000 MHz	_	2020 MHz	2180 MHz	_	2200 MHz	FDD
24	1626.5 MHz	_	1660.5 MHz	1525 MHz	_	1559 MHz	FDD
25	1850 MHz	_	1915 MHz	1930 MHz	_	1995 MHz	FDD
26	814 MHz	_	849 MHz	859 MHz	_	894 MHz	FDD
27	807 MHz	_	824 MHz	852 MHz	_	869 MHz	FDD
28	703 MHz	_	748 MHz	758 MHz	_	803 MHz	FDD
29	100 11112	N/A		717 MHz	_	728 MHz	FDD(Note2)
		1 1/7 1				120 11112	100(10002)
33	1900 MHz	_	1920 MHz	1900 MHz	_	1920 MHz	TDD
34	2010 MHz	_	2025 MHz	2010 MHz	_	2025 MHz	TDD
35	1850 MHz	_	1910 MHz	1850 MHz	_	1910 MHz	TDD
36	1930 MHz	_	1990 MHz	1930 MHz	_	1990 MHz	TDD
37	1910 MHz	_	1930 MHz	1910 MHz	_	1930 MHz	TDD
38	2570 MHz	_	2620 MHz	2570 MHz	_	2620 MHz	TDD
39	1880 MHz	_	1920 MHz	1880 MHz	_	1920 MHz	TDD
40	2300 MHz	_	2400 MHz	2300 MHz	_	2400 MHz	TDD
41	2496 MHz	_	2690 MHz	2496 MHz	_	2690 MHz	TDD
42	3400 MHz	_	3600 MHz	3400 MHz	_	3600 MHz	TDD
43	3600 MHz	_	3800 MHz	3600 MHz	_	3800 MHz	TDD
44	703 MHz	_	803 MHz	703 MHz	_	803 MHz	TDD
Note 1:       Band 6 is not applicable.         Note 2:       Restricted to E-UTRA operation when carrier aggregation is configured. The downlink operating band is paired with the uplink operating band (external) of the carrier aggregation configuration that is supporting the configured Pcell.							

Table 5.5-1 E-	UTRA ope	ating bands
----------------	----------	-------------

E-UTRA is designed to operate for the carrier aggregation bands defined in Tables 5.5-2 to 5.5-4.

Table	e 5.5-2. Intra-band contigu	ous carrier aggregation ba	ands
	CA Band	E-UTRA operating band	

	L-OTICA Operating band
CA_1	1
CA_7	7
CA_38	38
CA_40	40
CA_41	41

#### Table 5.5-3. Inter-band carrier aggregation bands

CA Band	E-UTRA operating bands
CA_1-5	1 5
CA_1-18	1 18
CA_1-19	<u>1</u> 19
CA_1-21	1 21
CA_2-17	2 17
CA_2-29	2 29
CA_3-5	3
CA_3-7	3 7
CA_3-8	3
CA_3-20	3 20
CA_4-5	4 5
CA_4-7	4 7
CA_4-12	4 12
CA_4-13	4 13
CA_4-17	4 17
CA_4-29	4 29
CA_5-12	5
CA_5-17	5
CA_7-20	7 20
CA_8-20	8 20
CA_11-18	11 18

CA Band	E-UTRA operating band
CA_25-25	25
CA_41-41	41

 Table 5.5-4. Intra-band non-contiguous carrier aggregation bands

## 5.6 Channel bandwidth

Requirements in present document are specified for the channel bandwidths listed in Table 5.6-1.

Table 5.6-1: Transmission bandwidth configuration N<sub>RB</sub> in E-UTRA channel bandwidths

Channel bandwidth BW <sub>Channel</sub> [MHz]	1.4	3	5	10	15	20
Transmission bandwidth configuration N <sub>RB</sub>	6	15	25	50	75	100

Figure 5.6-1 shows the relation between the Channel bandwidth ( $BW_{Channel}$ ) and the Transmission bandwidth configuration ( $N_{RB}$ ). The channel edges are defined as the lowest and highest frequencies of the carrier separated by the channel bandwidth, i.e. at  $F_C$  +/-  $BW_{Channel}$ /2.


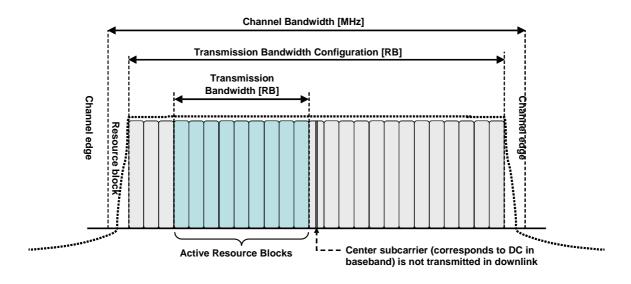


Figure 5.6-1: Definition of Channel Bandwidth and Transmission Bandwidth Configuration for one E-UTRA carrier.

Figure 5.6-2 illustrates the aggregated channel bandwidth for intra-band carrier aggregation.


Aggregated Channel Bandwidth, BW<sub>channel\_CA</sub> [MHz]

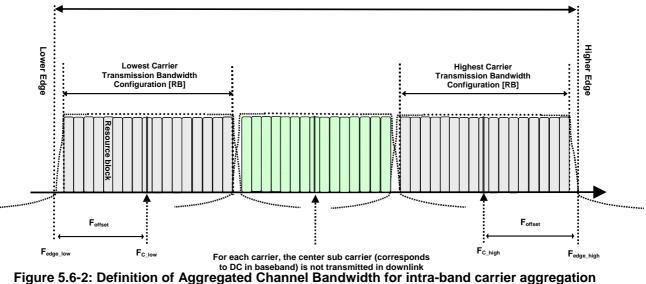

The lower edge of the Aggregated Channel Bandwidth ( $BW_{Channel\_CA}$ ) is defined as  $F_{edge\_low} = F_{C\_low} - F_{offset}$ . The upper edge of the aggregated channel bandwidth is defined as  $F_{edge\_high} = F_{C\_high} + F_{offset}$ . The Aggregated Channel Bandwidth,  $BW_{Channel\_CA}$ , is defined as follows:

$$BW_{Channel_{CA}} = F_{edge_{high}} - F_{edge_{low}} [MHz]$$

Figure 5.6-3 illustrates the sub-block bandwidth for a BS operating in non-contiguous spectrum.

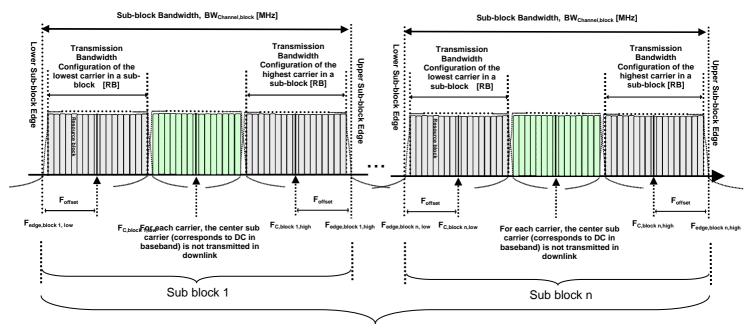

Base Station RF Bandwidth

#### Figure 5.6-3 Definition of Sub-block Bandwidth for intra-band non-contiguous spectrum

The lower sub-block edge of the Sub-block Bandwidth (BW<sub>Channel,block</sub>) is defined as  $F_{edge,block, low} = F_{C,block,low} - F_{offset}$ . The upper sub-block edge of the Sub-block Bandwidth is defined as  $F_{edge,block,high} = F_{C,block,high} + F_{offset}$ . The Sub-block Bandwidth, BW<sub>Channel,block</sub>, is defined as follows:

 $BW_{Channel,block} = F_{edge,block,high} - F_{edge,block,low}$  [MHz]

 $F_{offset}$  is defined in Table 5.6-2 below where  $BW_{Channel}$  is defined in Table 5.6-1.

Table 5.6-2: Definition of Foffset

Channel Bandwidth of the Lowest or Highest Carrier: BW <sub>Channel</sub> [MHz]	F <sub>offset</sub> [MHz]
5, 10, 15, 20	BW <sub>Channel</sub> /2

- NOTE 1: F<sub>offset</sub> is calculated separately for the Lower Edge/Lower Sub-block Edge and the Upper Edge of the Aggregated Channel Bandwidth/Sub-block Bandwidth.
- NOTE 2: The values of BW<sub>Channel\_CA</sub>/Sub-block Bandwidth for UE and BS are the same if the channel bandwidths of lowest and the highest component carriers are identical.

### 5.7 Channel arrangement

### 5.7.1 Channel spacing

The spacing between carriers will depend on the deployment scenario, the size of the frequency block available and the channel bandwidths. The nominal channel spacing between two adjacent E-UTRA carriers is defined as following:

Nominal Channel spacing =  $(BW_{Channel(1)} + BW_{Channel(2)})/2$ 

where  $BW_{Channel(1)}$  and  $BW_{Channel(2)}$  are the channel bandwidths of the two respective E-UTRA carriers. The channel spacing can be adjusted to optimize performance in a particular deployment scenario.

### 5.7.1A CA Channel spacing

For intra-band contiguously aggregated carriers the channel spacing between adjacent component carriers shall be multiple of 300 kHz.

The nominal channel spacing between two adjacent aggregated E-UTRA carriers is defined as follows:

Nominal channel spacing = 
$$\left[\frac{BW_{Channel(1)} + BW_{Channel(2)} - 0.1 |BW_{Channel(1)} - BW_{Channel(2)}|}{0.6}\right] 0.3$$

where  $BW_{Channel(1)}$  and  $BW_{Channel(2)}$  are the channel bandwidths of the two respective E-UTRA component carriers according to Table 5.6-1 with values in MHz. The channel spacing for intra-band contiguous carrier aggregation can be adjusted to any multiple of 300 kHz less than the nominal channel spacing to optimize performance in a particular deployment scenario.

### 5.7.2 Channel raster

The channel raster is 100 kHz for all bands, which means that the carrier centre frequency must be an integer multiple of 100 kHz.

### 5.7.3 Carrier frequency and EARFCN

The carrier frequency in the uplink and downlink is designated by the E-UTRA Absolute Radio Frequency Channel Number (EARFCN) in the range 0 - 65535. The relation between EARFCN and the carrier frequency in MHz for the downlink is given by the following equation, where  $F_{DL_{low}}$  and  $N_{Offs-DL}$  are given in table 5.7.3-1 and  $N_{DL}$  is the downlink EARFCN.

$$F_{DL} = F_{DL\_low} + 0.1(N_{DL} - N_{Offs-DL})$$

#### 3GPP TS 36.141 version 11.9.0 Release 11

55

The relation between EARFCN and the carrier frequency in MHz for the uplink is given by the following equation where  $F_{UL_{low}}$  and  $N_{Offs-UL}$  are given in table 5.7.3-1 and  $N_{UL}$  is the uplink EARFCN.

 $F_{UL} = F_{UL \ low} + 0.1(N_{UL} - N_{Offs\text{-}UL})$ 

E-UTRA		Downlink			Uplink	
perating Band	F <sub>DL_low</sub> [MHz]	$N_{Offs-DL}$	Range of N <sub>DL</sub>	F <sub>UL_low</sub> [MHz]		Range of Nu
1	2110	0	0 - 599	1920	18000	18000 - 1859
2	1930	600	600 - 1199	1850	18600	18600 - 1919
3	1805	1200	1200 - 1949	1710	19200	19200 - 1994
4	2110	1950	1950 – 2399	1710	19950	19950 - 2039
5	869	2400	2400 - 2649	824	20400	20400 - 2064
6	875	2650	2650 - 2749	830	20650	20650 - 2074
7	2620	2750	2750 – 3449	2500	20750	20750 - 2144
8	925	3450	3450 - 3799	880	21450	21450 - 2179
9	1844.9	3800	3800 - 4149	1749.9	21800	21800 - 2214
10	2110	4150	4150 – 4749	1710	22150	22150 - 2274
11	1475.9	4750	4750 – 4949	1427.9	22750	22750 - 2294
12	729	5010	5010 - 5179	699	23010	23010 - 231
13	746	5180	5180 - 5279	777	23180	23180 - 232
14	758	5280	5280 - 5379	788	23280	23280 - 233
17	734	5730	5730 - 5849	704	23730	23730 - 2384
18	860	5850	5850 - 5999	815	23850	23850 - 2399
19	875	6000	6000 - 6149	830	24000	24000 - 2414
20	791	6150	6150 - 6449	832	24150	24150 - 2444
21	1495.9	6450	6450 - 6599	1447.9	24450	24450 - 2459
22	3510	6600	6600-7399	3410	24600	24600-2539
23	2180	7500	7500 – 7699	2000	25500	25500 - 2569
24	1525	7700	7700 – 8039	1626.5	25700	25700 - 2603
25	1930	8040	8040 - 8689	1850	26040	26040 - 2668
26	859	8690	8690 - 9039	814	26690	26690 - 2703
27	852	9040	9040 - 9209	807	27040	27040 - 272
28	758	9210	9210 - 9659	703	27210	27210 - 276
29 <sup>2</sup>	717	9660	9660 - 9769		N/A	
33	1900	36000	36000 - 36199	1900	36000	36000 - 3619
34	2010	36200	36200 - 36349	2010	36200	36200 - 3634
35	1850	36350	36350 - 36949	1850	36350	36350 - 3694
36	1930	36950	36950 - 37549	1930	36950	36950 - 3754
37	1910	37550	37550 - 37749	1910	37550	37550 - 3774
38	2570	37750	37750 - 38249	2570	37750	37750 - 3824
39	1880	38250	38250 - 38649	1880	38250	38250 - 3864
40	2300	38650	38650 - 39649	2300	38650	38650 - 3964
41	2496	39650	39650 - 41589	2496	39650	39650 - 4158
42	3400	41590	41590 - 43589	3400	41590	41590 - 435
43	3600	43590	43590 - 45589	3600	43590	43590 - 4558
44	703	45590	45590 - 46589	703	45590	45590 - 465
			ate carrier frequencienting band edge shall			

channel numbers at the lower operating band edge and the last 6, 14 channel numbers at the upper operating band edge shall not be used for channel bandwidths of 1.4, 3, 5, 10, 15 and 20 MHz respectively. NOTE 2: Restricted to E-UTRA operation when carrier aggregation is configured.

#### 5.8 Requirements for contiguous and non-contiguous spectrum

A spectrum allocation where the BS operates can either be contiguous or non-contiguous. Unless otherwise stated, the requirements in the present specification apply for BS configured for both contiguous spectrum operation and noncontiguous spectrum operation.

For BS operation in non-contiguous spectrum, some requirements apply also inside the sub-block gaps. For each such requirement, it is stated how the limits apply relative to the sub-block edges.

# 6 Transmitter characteristics

### 6.1 General

General test conditions for transmitter tests are given in Clause 4, including interpretation of measurement results and configurations for testing. BS configurations for the tests are defined in Clause 4.5, while Annex H provides an informative description of E-UTRAN test cases.

#### 6.1.1 E-UTRA Test Models

The set-up of physical channels for transmitter tests shall be according to one of the E-UTRA test models (E-TM) below. A reference to the applicable test model is made within each test.

The following general parameters are used by all E-UTRA test models:

- The test models are defined for a single antenna port (using p = 0); 1 code word (q = 0), 1 layer, precoding is not used; unless specified otherwise
- Duration is 10 subframes (10 ms)
- Normal CP
- Virtual resource blocks of localized type, no intra-subframe hopping for PDSCH
- UE-specific reference signals are not used

Power settings of physical channels are defined by physical channel EPRE relative to the EPRE of the RS. The relative accuracy of the physical channel EPRE as referred to the EPRE of the RS shall have a tolerance of  $\pm 0.5$  dB.

For E-UTRA TDD, test models are derived based on the uplink/downlink configuration 3 and special subframe configuration 8 defined in TS36.211, i.e. as showing in the table 6.1.1-1. Number of frames for the test models is 2.

#### Table 6.1.1-1: Configurations of TDD eNB test models

Downlink-to- Uplink Switch-point		UL/DL sub- dio frame (10 s)	DwPTS	GP	UpPTS
periodicity	DL UL				
10ms	6 3		$24144 \cdot T_s$	$2192 \cdot T_s$	$4384 \cdot T_s$

#### 6.1.1.1 E-UTRA Test Model 1.1 (E-TM1.1)

This model shall be used for tests on:

- BS output power
- Unwanted emissions
  - Occupied bandwidth
  - ACLR
  - Operating band unwanted emissions
  - Transmitter spurious emissions
- Transmitter intermodulation
- RS absolute accuracy

Parameter	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
Reference, Synchronisation Signals		1				
RS boosting, $P_B = E_B/E_A$	1	1	1	1	1	1
Synchronisation signal EPRE / E <sub>RS</sub> [dB]	0.000	0.000	0.000	0.000	0.000	0.000
Reserved EPRE / E <sub>RS</sub> [dB]	-inf	-inf	-inf	-inf	-inf	-inf
PBCH						
PBCH EPRE / E <sub>RS</sub> [dB]	0.000	0.000	0.000	0.000	0.000	0.000
Reserved EPRE / E <sub>RS</sub> [dB]	-inf	-inf	-inf	-inf	-inf	-inf
PCFICH						
# of symbols used for control channels	2	1	1	1	1	1
PCFICH EPRE / E <sub>RS</sub> [dB]	3.222	0	0	0	0	0
PHICH						
# of PHICH groups	1	1	1	2	2	3
# of PHICH per group	2	2	2	2	2	2
PHICH BPSK symbol power / E <sub>RS</sub> [dB]	-3.010	-3.010	-3.010	-3.010	-3.010	-3.010
PHICH group EPRE / E <sub>RS</sub> [dB]	0	0	0	0	0	0
PDCCH			•	•		•
# of available REGs	23	23	43	90	140	187
# of PDCCH	2	2	2	5	7	10
# of CCEs per PDCCH	1	1	2	2	2	2
# of REGs per CCE	9	9	9	9	9	9
# of REGs allocated to PDCCH	18	18	36	90	126	180
# of <nil> REGs added for padding</nil>	5	5	7	0	14	7
PDCCH REG EPRE / E <sub>RS</sub> [dB]	0.792	2.290	1.880	1.065	1.488	1.195
<nil> REG EPRE / E<sub>RS</sub> [dB]</nil>	-inf	-inf	-inf	-inf	-inf	-inf
PDSCH						
# of QPSK PDSCH PRBs which are boosted	6	15	25	50	75	100
$PRB P_A = E_A / E_{RS} [dB]$	0	0	0	0	0	0
# of QPSK PDSCH PRBs which are de-boosted	0	0	0	0	0	0
$PRB \; P_{A} = E_{A} / E_{RS}  [dB]$	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.

Table 6.1.1.1-1: Physical channel parameters of E-TM1.1

### 6.1.1.2 E-UTRA Test Model 1.2 (E-TM1.2)

This model shall be used for tests on:

- Unwanted emissions
  - ACLR
  - Operating band unwanted emissions

#### Table 6.1.1.2-1: Physical channel parameters of E-TM1.2

Parameter	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
Reference, Synchronisation Signals						
RS boosting, $P_B = E_B/E_A$	1	1	1	1	1	1
Synchronisation signal EPRE / E <sub>RS</sub> [dB]	0.000	-4.730	-4.730	-4.730	-4.730	-4.730
Reserved EPRE / E <sub>RS</sub> [dB]	-inf	-inf	-inf	-inf	-inf	-inf
PBCH						
PBCH EPRE / E <sub>RS</sub> [dB]	0.000	-4.730	-4.730	-4.730	-4.730	-4.730
Reserved EPRE / E <sub>RS</sub> [dB]	-inf	-inf	-inf	-inf	-inf	-inf
PCFICH				1		

# of symbols used for control channels	2	1	1	1	1	1
PCFICH EPRE / E <sub>RS</sub> [dB]	3.222	0	0	0	0	0
PHICH				•	•	
# of PHICH groups	1	1	1	2	2	3
# of PHICH per group	2	2	2	2	2	2
PHICH BPSK symbol power / E <sub>RS</sub> [dB]	-3.010	-3.010	-3.010	-3.010	-3.010	-3.010
PHICH group EPRE / E <sub>RS</sub> [dB]	0	0	0	0	0	0
PDCCH				•	•	
# of available REGs	23	23	43	90	140	187
# of PDCCH	2	2	2	5	7	10
# of CCEs per PDCCH	1	1	2	2	2	2
# of REGs per CCE	9	9	9	9	9	9
# of REGs allocated to PDCCH	18	18	36	90	126	180
# of dummy REGs added for padding	5	5	7	0	14	7
PDCCH REG EPRE / E <sub>RS</sub> [dB]	0.792	2.290	1.880	1.065	1.488	1.195
<nil> REG EPRE / E<sub>RS</sub> [dB]</nil>	-inf	-inf	-inf	-inf	-inf	-inf
PDSCH	·		·			
# of QPSK PDSCH PRBs which are boosted	2	6	10	20	30	40
$PRB P_A = E_A / E_{RS} [dB]$	3 (*)	3	3	3	3	3
# of QPSK PDSCH PRBs which are de-boosted	4	9	15	30	45	60
$PRB \; P_{A} = E_{A} / E_{RS} [dB]$	-2.990 (*)	-4.730	-4.730	-4.730	-4.730	-4.730

Note (\*): in subframes containing PBCH or synchronisation signal REs, no PRB boosting/deboosting shall be applied, i.e. PRB  $P_A = E_A/E_{RS} = 0$  [dB]

	Subframe	Subframe	Subframe	Subframe	Subframe	Subframe	Subframe	Subframe	Subframe	Subframe
	0	1	2	3	4	5	6	7	8	9
1.4 MHz	N.A.	13	13	23	2 5	N.A.	0 2	0 5	2 5	15
3 MHz	0 1 2 11 12 13	0 4 10 11 12 13	0356 1113	0 1 4 5 7 12	02349 10	1 2 3 11 12 14	4 6 8 11 13 14	2 5 6 12 13 14	03478 11	1 3 4 5 11 12
5 MHz	0 1 3 6 7 8 16 18 20 21	0 1 4 5 9 10 12 17 18 24	0 1 2 12 13 14 19 20 23 24	0 5 8 12 13 15 17 20 21 24	0 4 6 7 12 13 15 16 22 23	0 1 2 3 8 16 18 21 22 24	1 3 5 7 9 10 12 15 21 22	0 1 2 3 7 10 14 18 20 21	1 4 8 9 10 12 15 16 18 20	1 2 3 5 6 9 10 13 16 17
10 MHz	1 2 7 8 9 10 11 16 20 31 32 33 35 36 39 40 42 46 47 48	5 6 7 9 11 15 20 21 22 24 25 27 34 35 36 37 40 44 46 49	3 5 11 12 14 17 18 19 20 22 26 27 28 29 31 34 38 41 42 49	1 2 3 5 8 14 16 22 23 26 28 30 32 34 38 41 42 45 46 47	0 3 6 7 8 9 10 12 13 16 18 21 23 31 33 41 42 45 46 47	0 2 3 4 5 7 9 10 11 12 15 19 20 28 29 30 31 34 36 48	0 1 4 6 8 9 10 16 17 19 20 21 24 29 30 31 35 37 38 47	2 3 4 5 6 9 10 12 16 17 19 22 24 25 26 30 34 37 42 48	7 9 14 15 16 21 22 28 30 31 32 34 35 41 42 43 44 46 48 49	11 13 16 17 18 21 24 27 28 29 30 32 37 38 40 42 45 47 48 49
15 MHz	0 1 2 3 5 7 8 9 12 18 19 20 21 23 24 25 29 30 31 32 33 42 47 48 49 63 65 68 71 73	0 1 3 4 5 6 7 11 18 20 21 24 26 30 31 38 46 47 49 50 51 53 54 57 60 67 68 70 73 74	2 11 12 15 18 21 22 24 25 26 29 32 33 34 42 45 46 47 50 51 52 54 58 59 60 64 68 70 72 74	2 3 4 7 9 11 12 15 17 20 24 27 33 34 35 39 42 43 45 46 48 56 59 60 62 67 70 71 73 74	4 5 6 8 13 17 22 25 27 29 31 32 33 34 35 41 44 46 48 50 52 56 59 60 64 67 69 70 71 74	0 2 3 4 7 8 18 20 23 24 25 27 29 42 43 45 47 49 50 54 56 60 62 65 66 67 70 71 72 73	2 11 14 15 18 25 26 28 30 31 32 33 36 37 38 39 41 43 45 50 53 54 58 59 62 65 67 68 70 71	3 4 7 12 19 23 24 26 27 28 30 33 34 35 41 42 49 53 54 58 59 60 61 62 65 67 69 70 71 73	0 3 8 9 10 13 14 15 17 18 19 22 23 24 25 26 27 32 37 39 47 50 53 56 61 63 69 71 73 74	0 3 7 8 11 13 14 16 18 23 25 30 32 35 44 46 47 48 53 55 57 59 61 62 64 67 68 69 70 71
20 MHz	$\begin{array}{c} 0\ 6\ 10\ 13\\ 15\ 16\ 20\\ 23\ 25\ 28\\ 29\ 30\ 31\\ 32\ 33\ 39\\ 41\ 42\ 44\\ 45\ 54\ 56\\ 57\ 63\ 66\\ 67\ 68\ 76\end{array}$	1 3 7 9 10 13 19 20 21 22 23 25 26 27 30 33 34 35 36 47 49 50 51 53 55 57 60 61	$\begin{array}{c} 1 & 2 & 3 & 6 & 8 \\ 10 & 11 & 15 \\ 16 & 17 & 19 \\ 21 & 25 & 26 \\ 28 & 29 & 32 \\ 35 & 39 & 41 \\ 42 & 43 & 44 \\ 51 & 52 & 54 \\ 60 & 64 & 69 \end{array}$	5 7 9 10 12 15 16 21 23 24 27 28 29 30 33 34 35 36 39 47 49 54 55 56 57 64 66 70	2 3 4 5 6 7 14 17 19 21 22 24 26 37 42 44 47 49 51 56 57 62 63 65 67 70 71 73 76	1 2 5 6 8 9 12 13 21 22 25 26 28 32 35 39 40 43 45 46 57 59 61 62 64 66 68 71 73	$\begin{array}{c} 0 & 10 & 11 \\ 0 & 1 & 23 & 5 \\ 8 & 9 & 10 & 12 \\ 22 & 25 & 26 \\ 27 & 29 & 31 \\ 32 & 33 & 36 \\ 38 & 39 & 43 \\ 45 & 49 & 53 \\ 55 & 59 & 62 \\ 63 & 64 & 71 \end{array}$	0 1 3 4 5 7 11 18 19 20 21 26 27 29 30 31 33 35 39 40 41 43 44 46 47 50 53 55 56	$\begin{array}{c} 2 & 3 & 4 & 7 \\ 11 & 13 & 15 \\ 16 & 24 & 25 \\ 27 & 29 & 35 \\ 36 & 40 & 43 \\ 44 & 45 & 46 \\ 51 & 52 & 55 \\ 56 & 57 & 63 \\ 64 & 65 & 68 \end{array}$	0 4 7 8 10 11 16 18 22 26 29 32 35 37 43 44 46 47 48 49 53 54 57 59 60 61 64 66

### Table 6.1.1.2-2: Numbers ( $\mathit{n}_{\rm PRB}$ ) of the boosted PRBs (FDD)

77 79 82	64 68 76	76 79 81	72 76 77	77 81 83	77 78 84	72 73 75	62 64 66	71 77 78	67 69 70
84 85 88	77 80 83	84 86 88	80 81 86	85 86 87	85 86 93	77 78 81	67 69 70	81 82 83	76 78 81
92 94 95	84 86 87	89 90 93	87 90 91	89 94 95	94 95 96	84 89 97	72 74 92	84 85 86	84 87 89
97 98 99	89 95 99	94 99	92 98 99	97 99	97 99	98	93 98	90 94 98	91 95 96

Table 6.1.1.2-3: Numbers (  $\mathit{n}_{\rm PRB}$  ) of the boosted PRBs (TDD)

Frame1	Subframe 0	Subframe 1	Subframe 5	Subframe 6	Subframe 7	Subframe 8	Subframe 9
1.4 MHz	N.A.	N.A.	N.A.	N.A	4 5	2 5	03
3 MHz	0 1 3 11 12 14	1 2 3 11 12 14	0 1 2 3 1113	1 3 11 12 13 14	1 4 8 10 11 12	16891112	023456
5 MHz	1 2 5 8 17 18 19 21 23 24	1 3 5 6 7 17 19 20 23 24	0 3 4 5 8 17 18 19 21 22	2 3 6 7 8 17 18 19 20 24	1 2 11 13 15 17 18 19 20 21	1 2 4 5 6 7 8 9 10 12	1 3 4 8 10 12 16 19 20 22
10 MHz	2 4 6 7 10 11 13 17 18 19 34 35 37 38 41 42 46 47 48 49	1 3 6 7 9 11 14 15 17 18 19 28 29 30 35 37 38 39 43 44	3 4 5 6 10 11 12 14 16 18 30 34 35 36 37 39 40 41 43 48	2 4 6 7 8 9 10 13 14 16 19 20 21 29 32 34 39 41 44 45	2 4 7 12 14 16 20 21 24 26 28 29 34 41 43 44 45 46 47 48	2 5 8 9 11 12 13 16 18 21 22 23 27 29 30 31 32 33 46 47	1 4 7 11 12 13 14 15 20 21 27 31 34 37 38 41 42 46 48 49
15 MHz	3 5 6 9 10 13 15 17 20 23 25 26 27 28 29 33 44 45 51 53 56 57 58 61 63 66 70 71 73 74	1 5 7 8 9 10 11 13 15 19 21 24 26 42 45 46 51 52 53 55 56 57 58 59 60 61 62 64 65 72	3 4 6 7 9 10 11 13 14 15 16 20 22 24 25 28 31 32 33 43 49 52 55 58 61 62 66 67 70 73	3 4 7 8 12 13 14 16 18 19 20 22 24 27 28 30 32 41 42 43 44 46 49 50 51 65 67 68 69 71	2 6 8 9 10 11 13 16 18 19 21 22 26 30 31 41 45 46 47 48 51 55 57 58 62 63 64 69 73 74	0 2 7 11 13 17 19 20 23 27 28 31 39 40 41 43 45 46 47 48 51 55 57 58 63 65 66 70 71 73	1 2 3 7 8 9 10 12 13 17 19 21 22 23 24 28 30 32 37 40 41 46 48 53 56 58 61 65 69 73
20 MHz	2 4 7 8 12 13 14 18 20 21 23 27 28 31 34 35 37 38 39 44 46 53 56 58 60 68 70 71 74 75 76 78 82 85 87 88 93 95 97 99	4 5 6 7 8 9 10 11 12 14 17 19 20 22 25 27 28 29 32 33 37 38 41 43 53 58 61 65 69 70 73 74 78 79 80 82 83 86 90 97	4 5 9 11 13 14 16 19 22 24 25 27 29 32 33 37 40 42 43 45 46 53 54 57 58 62 66 67 68 69 83 86 88 89 90 91 92 93 95 97	2 3 8 9 10 11 12 14 15 17 18 22 24 26 28 30 35 36 40 41 42 53 55 60 61 62 63 64 65 68 74 77 82 84 85 87 93 97 98 99	0 3 10 13 14 17 23 25 27 28 30 31 36 37 38 40 41 43 49 50 54 55 57 58 60 61 63 64 70 74 76 77 81 84 85 87 88 94 95 98	2 3 4 10 11 12 15 18 21 22 23 26 30 31 32 36 37 39 40 41 42 43 48 50 53 54 56 58 61 64 66 71 72 77 81 82 89 92 98 99	4 9 12 13 17 19 20 21 22 29 31 36 37 39 40 41 42 46 48 49 54 56 57 60 64 66 73 74 75 80 83 86 87 89 90 92 94 96 98 99

Frame2	Subframe 0	Subframe 1	Subframe 5	Subframe 6	Subframe 7	Subframe 8	Subframe 9
1.4 MHz	N.A.	N.A.	N.A.	N.A	4 5	12	13
3 MHz	0 1 2 11 12 13	0 1 2 3 13 14	0 1 2 3 12 14	0 1 2 3 11 13	03461012	269111314	1 5 7 9 13 14
5 MHz	1 2 3 8 17 20	12456716	1246816	0356717	2 3 8 10 13 15	04671314	0 2 5 9 14 18
	21 22 23 24	17 22 23	18 21 23 24	19 20 21 24	16 21 23 24	15 16 19 24	19 21 22 23
10 MHz	1456811	0 1 7 15 18 19	12568911	6 7 10 11 15	2 4 10 11 18	689101114	2578914
	12 13 15 17	20 21 29 30	13 14 15 16	18 19 20 21	20 23 24 28	15 16 18 19	16 18 23 30
	20 28 30 31	32 34 35 37	18 20 30 32	28 29 33 35	30 32 37 40	20 21 23 24	32 33 34 37
	32 42 43 46	38 40 42 43	33 40 41 46	36 38 40 41	41 43 44 45	27 28 36 37	41 42 44 45
	48 49	44 47	49	43 44 49	46 47 48	47 49	46 49
15 MHz	3 7 10 11 15	8 9 11 12 14	1 3 9 11 13 17	02461011	0135911	0458910	1 5 8 9 10 13
	16 17 23 27	15 17 22 23	21 22 23 24	13 14 15 16	14 15 16 19	12 13 15 20	14 15 20 21
	29 30 31 32	24 27 28 29	25 28 29 46	17 20 22 23	24 25 26 27	22 30 32 33	23 26 27 28
	42 43 48 49	31 41 42 45	48 49 51 52	28 29 43 44	28 31 33 34	35 37 38 42	29 32 33 34
	50 53 54 57	48 51 54 55	53 54 55 57	46 47 51 53	38 40 42 43	44 45 46 47	39 43 44 57
	60 62 64 65	56 62 63 67	61 64 65 67	54 56 59 61	46 48 50 52	48 51 52 55	60 62 64 65
	66 67 69 72	68 70 71 73	68 72 73 74	63 69 71 72	59 61 67 74	59 60 66 69	69 71 72 73
	74	74					
20 MHz	1 4 10 14 15	0135812	02456711	0246711	3567916	1 4 7 10 13 18	0123578
	17 18 19 23	14 15 17 19	12 13 14 16	12 13 17 18	20 21 23 24	19 25 26 27	10 11 15 19
	29 30 31 32	20 22 23 25	19 20 21 27	19 20 27 28	25 26 31 32	28 30 32 35	20 21 24 26
	33 37 38 39	26 28 29 30	30 32 33 35	31 35 37 38	35 37 41 42	37 38 41 46	28 31 32 33
	42 46 55 61	37 38 39 45	37 41 44 46	40 43 45 56	43 44 46 48	47 50 51 52	34 44 45 54
	64 65 66 68	58 59 62 63	53 56 58 60	57 59 63 68	51 54 59 60	53 54 57 60	58 59 61 63
	69 70 72 73	68 71 72 75	61 62 64 65	70 71 77 79	61 62 64 67	62 70 71 73	65 67 69 70
	76 82 83 84	78 82 84 85	67 68 70 73	80 82 85 87	76 77 78 79	78 79 81 83	77 85 88 89
	86 89 90 93	91 92 93 94	79 82 90 92	89 92 95 96	82 84 86 87	84 87 91 95	90 92 94 98
	95 97 99	96 98	98	97 98	88 95	98 99	99

### 6.1.1.3 E-UTRA Test Model 2 (E-TM2)

This model shall be used for tests on:

- Total power dynamic range (lower OFDM symbol power limit at min power),
  - EVM of single 64QAM PRB allocation (at min power)
  - Frequency error (at min power)

#### Table 6.1.1.3-1: Physical channel parameters of E-TM2

Parameter	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
Reference, Synchronisation Signals	•					
RS boosting, $P_B = E_B/E_A$	1	1	1	1	1	1
Synchronisation signal EPRE / E <sub>RS</sub> [dB]	0.000	0.000	0.000	0.000	0.000	0.000
Reserved EPRE / E <sub>RS</sub> [dB]	-inf	-inf	-inf	-inf	-inf	-inf
PBCH						
PBCH EPRE / E <sub>RS</sub> [dB]	0.000	0.000	0.000	0.000	0.000	0.000
Reserved EPRE / E <sub>RS</sub> [dB]	-inf	-inf	-inf	-inf	-inf	-inf
PCFICH						
# of symbols used for control channels	2	1	1	1	1	1
PCFICH EPRE / E <sub>RS</sub> [dB]	0	0	0	0	0	0
PHICH						
# of PHICH groups	1	1	1	2	2	3
# of PHICH per group	2	2	2	2	2	2
PHICH BPSK symbol power / E <sub>RS</sub> [dB]	-3.010	-3.010	-3.010	-3.010	-3.010	-3.010
PHICH group EPRE / E <sub>RS</sub> [dB]	0	0	0	0	0	0
PDCCH	•					
# of available REGs	23	23	43	90	140	187
# of PDCCH	1	1	1	1	1	1
# of CCEs per PDCCH	1	1	2	2	2	2
# of REGs per CCE	9	9	9	9	9	9
# of REGs allocated to PDCCH	9	9	18	18	18	18
# of <nil> REGs added for padding</nil>	14	14	25	72	122	169
PDCCH REG EPRE / E <sub>RS</sub> [dB]	0	0	0	0	0	0
<nil> REG EPRE / E<sub>RS</sub>[dB]</nil>	-inf	-inf	-inf	-inf	-inf	-inf
PDSCH				•		
# of 64QAM PDSCH PRBs within a slot for which EVM is measured	1	1	1	1	1	1
$PRB P_A = E_A / E_{RS} [dB]$	0	0	0	0	0	0
# of PDSCH PRBs which are not allocated	5	14	24	49	74	99
$PRB \; P_{A} = E_{A} / E_{RS}  [dB]$	-inf	-inf	-inf	-inf	-inf	-inf

Table 6.1.1.3-2: Numbers ( $n_{PRB}$ ) of the allocated PRB (64QAM) (FDD)

	Subframe 0	Subframe 1	Subframe 2	Subframe 3	Subframe 4	Subframe 5	Subframe 6	Subframe 7	Subframe 8	Subframe 9
1.4 MHz	4	1	1	2	5	3	0	0	5	4
3 MHz	13	11	13	5	9	14	6	13	0	1

5 MHz	8	17	21	8	22	2	9	14	0	13
10 MHz	16	36	19	26	42	30	17	48	9	0
15 MHz	32	46	18	72	22	4	31	58	27	3
20 MHz	63	34	44	7	94	2	97	19	56	32

Table 6.1.1.3-3: Numbers ( $n_{\rm PRB}$ ) of the allocated PRB (64QAM) (TDD)

Frame1	Subframe 0	Subframe 1	Subframe 5	Subframe 6	Subframe 7	Subframe 8	Subframe 9
1.4 MHz	4	5	5	2	0	0	3
3 MHz	10	14	12	5	0	1	7
5 MHz	17	24	21	8	1	2	12
10 MHz	35	49	42	17	2	4	25
15 MHz	53	74	63	26	3	6	38
20 MHz	71	99	85	35	4	8	51

Frame2	Subframe 0	Subframe 1	Subframe 5	Subframe 6	Subframe 7	Subframe 8	Subframe 9
1.4 MHz	4	5	2	1	3	1	4
3 MHz	11	14	5	3	8	3	11
5 MHz	18	23	8	5	13	5	19
10 MHz	37	46	17	10	26	11	38
15 MHz	56	70	25	15	40	17	57
20 MHz	75	93	34	20	53	23	76

### 6.1.1.4 E-UTRA Test Model 3.1 (E-TM3.1)

This model shall be used for tests on:

- Output power dynamics
  - Total power dynamic range (upper OFDM symbol power limit at max power with all 64QAM PRBs allocated)
- Transmitted signal quality
  - Frequency error
  - EVM for 64QAM modulation (at max power)

Parameter	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
Reference, Synchronisation Signals	÷					
RS boosting, $P_B = E_B/E_A$	1	1	1	1	1	1
Synchronisation signal EPRE / E <sub>RS</sub> [dB]	0.000	0.000	0.000	0.000	0.000	0.000
Reserved EPRE / E <sub>RS</sub> [dB]	-inf	-inf	-inf	-inf	-inf	-inf
PBCH		•	•		•	•
PBCH EPRE / E <sub>RS</sub> [dB]	0.000	0.000	0.000	0.000	0.000	0.000
Reserved EPRE / E <sub>RS</sub> [dB]	-inf	-inf	-inf	-inf	-inf	-inf
PCFICH		•	•		•	•
# of symbols used for control channels	2	1	1	1	1	1
PCFICH EPRE / E <sub>RS</sub> [dB]	3.222	0	0	0	0	0
PHICH	•	•	•		•	

#### Table 6.1.1.4-1: Physical channel parameters of E-TM3.1

# of PHICH groups	1	1	1	2	2	3
# of PHICH per group	2	2	2	2	2	2
PHICH BPSK symbol power / E <sub>RS</sub> [dB]	-3.010	-3.010	-3.010	-3.010	-3.010	-3.010
PHICH group EPRE / E <sub>RS</sub> [dB]	0	0	0	0	0	0
PDCCH						
# of available REGs	23	23	43	90	140	187
# of PDCCH	2	2	2	5	7	10
# of CCEs per PDCCH	1	1	2	2	2	2
# of REGs per CCE	9	9	9	9	9	9
# of REGs allocated to PDCCH	18	18	36	90	126	180
# of <nil> REGs added for padding</nil>	5	5	7	0	14	7
PDCCH REG EPRE / E <sub>RS</sub> [dB]	0.792	2.290	1.880	1.065	1.488	1.195
<nil> REG EPRE / E<sub>RS</sub>[dB]</nil>	-inf	-inf	-inf	-inf	-inf	-inf
PDSCH						
# of 64QAM PDSCH PRBs within a slot for which EVM is measured	6	15	25	50	75	100
$PRB P_A = E_A / E_{RS} [dB]$	0	0	0	0	0	0
# of PDSCH PRBs within a slot for which EVM is not measured (used for power balancing only)	0	0	0	0	0	0
$PRB \ P_{A} = E_{A} / E_{RS} [dB]$	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.

### 6.1.1.5 E-UTRA Test Model 3.2 (E-TM3.2)

This model shall be used for tests on:

- Transmitted signal quality
  - Frequency error
  - EVM for 16QAM modulation

#### Table 6.1.1.5-1: Physical channel parameters of E-TM3.2

Parameter	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
Reference, Synchronisation Signals		1				
RS boosting, $P_B = E_B/E_A$	1	1	1	1	1	1
Synchronisation signal EPRE / E <sub>RS</sub> [dB]	0.000	1.573	2.426	2.426	3.005	2.426
Reserved EPRE / E <sub>RS</sub> [dB]	-inf	-inf	-inf	-inf	-inf	-inf
PBCH						
PBCH EPRE / E <sub>RS</sub> [dB]	0.000	1.573	2.426	2.426	3.005	2.426
Reserved EPRE / E <sub>RS</sub> [dB]	-inf	-inf	-inf	-inf	-inf	-inf
PCFICH	•					
# of symbols used for control channels	2	1	1	1	1	1
PCFICH EPRE / E <sub>RS</sub> [dB]	3.222	0	0	0	0	0
PHICH	•					
# of PHICH groups	1	1	1	2	2	3
# of PHICH per group	2	2	2	2	2	2
PHICH BPSK symbol power / E <sub>RS</sub> [dB]	-3.010	-3.010	-3.010	-3.010	-3.010	-3.010
PHICH group EPRE / E <sub>RS</sub> [dB]	0	0	0	0	0	0
PDCCH	•					
# of available REGs	23	23	43	90	140	187
# of PDCCH	2	2	2	5	7	10
# of CCEs per PDCCH	1	1	2	2	2	2
# of REGs per CCE	9	9	9	9	9	9
# of REGs allocated to PDCCH	18	18	36	90	126	180
# of <nil> REGs added for padding</nil>	5	5	7	0	14	7

#### ETSI TS 136 141 V11.9.0 (2014-07)

PDCCH REG EPRE / E <sub>RS</sub> [dB]	0.792	2.290	1.880	1.065	1.488	1.195
<nil> REG EPRE / E<sub>RS</sub>[dB]</nil>	-inf	-inf	-inf	-inf	-inf	-inf
PDSCH						•
# of 16QAM PDSCH PRBs within a slot for which EVM is measured	4	7	15	30	50	60
$PRB \; P_{A} = E_{A} / E_{RS} [dB]$	-3 (*)	-3	-3	-3	-3	-3
# of QPSK PDSCH PRBs within a slot for which EVM is not measured (used for power balancing only)	2	8	10	20	25	40
$PRB \; P_{A} = E_{A} / E_{RS} \; [dB]$	3.005 (*)	1.573	2.426	2.426	3.005	2.426

Note (\*): in subframes containing PBCH or synchronisation signal REs, no PRB boosting/deboosting shall be applied, i.e. PRB  $P_A = E_A/E_{RS} = 0$  [dB]

	Subframe									
	0	1	2	3	4	5	6	7	8	9
1.4 MHz	1345	1235	0134	1235	0235	0124	0125	0245	1235	0135
3	0123	03410	02356	01457	02349	0123	4568	2569	03478	12345
MHz	11 12 13	11 12 13	11 13	10 12	10 13	11 12 14	11 13 14	12 13 14	9 11	11 12
5	01346	01234	01237	0568	01246	01234	13457	01234	1489	12345
MHz	7 8 16 17	56910	8 9 10 12	10 11 12	7 12 13	67816	9 10 11	7 8 10 13	10 11 12	691011
	18 19 20	12 13 17	13 14 19	13 15 17	14 15 16	17 18 21	12 13 14	14 18 19	13 15 16	12 13 16
	21 23 24	18 20 24	20 23 24	18 20 21 22 24	17 22 23 24	22 23 24	15 21 22 24	20 21 24	18 20 22 23 24	17 21 23
10	12345	01245	01345	01235	03678	02345	01345	01234	25789	1369
MHz	678910	67910	6 7 11 12	6 8 12 14	9 10 12	7 9 10 11	68910	567910	10 11 14	11 13 15
	11 15 16	11 13 15	14 17 18	15 16 17	13 15 16	12 13 14	13 14 16	12 14 16	15 16 17	16 17 18
	17 20 21	18 20 21	19 20 21	18 22 23	17 18 21	15 19 20	17 18 19	17 18 19	21 22 27	21 24 25
	28 30 31	22 24 25	22 24 25	26 28 29	23 25 28	28 29 30	20 21 23	22 24 25	28 29 30	26 27 28
	32 33 35	27 28 29	26 27 28	30 32 34	31 33 37	31 34 36	24 29 30	26 27 28	31 32 34	29 30 32
	36 39 40	34 35 36	29 31 32	35 38 39	38 39 41	37 38 39	31 32 35	30 31 32	35 37 38	34 37 38
	42 44 46	37 40 43	34 38 41	40 41 42	42 44 45	40 42 44	37 38 39	34 37 42	41 42 43	39 40 41
	47 48	44 46 49	42 45 49	45 46 47	46 47 48 49	45 48 49	40 47 48	45 48	44 46 48 49	42 45 47 48 49
15	01235	01234	12349	23467	24568	02345	01239	01345	01237	01378
MHz	678912	567811	11 12 13	9 11 12	10 13 15	781112	11 12 14	67811	891012	11 13 14
	14 16 17	18 20 21	14 15 17	14 15 17	16 17 18	14 16 18	15 17 18	12 14 19	13 14 15	16 18 19
	18 19 20	24 25 26	18 20 21	18 20 22	20 22 24 25 26 27	20 22 23	20 23 25	20 21 23 24 26 27	17 18 19 21 22 23	20 21 22
	21 23 24 25 26 28	27 29 30 31 33 36	22 24 25 26 28 29	24 25 27 28 29 30	25 26 27 28 29 30	24 25 27 28 29 30	26 28 29 30 31 32	24 26 27 28 30 31	21 22 23 24 25 26	23 25 27 28 29 30
	29 30 31	37 38 39	31 32 33	31 33 34	31 32 33	31 33 42	33 36 37	33 34 35	27 28 29	32 34 35
	32 33 41	40 43 45	34 40 42	35 38 39	34 35 38	43 45 46	38 39 41	38 40 41	32 33 34	36 40 41
	42 45 47	46 47 48	43 44 45	40 42 43	40 41 44	47 48 49	42 43 45	42 44 45	36 37 39	42 43 44
	48 49 50	49 50 51	46 47 48	45 46 47	45 46 47	50 51 53	46 50 52	46 49 51	40 43 46	45 46 47
	52 53 56	53 54 55	50 51 52	48 49 55	48 50 51	54 56 58	53 54 57	52 53 54	47 48 49	48 50 51
	57 60 62	57 58 59	54 56 58	56 59 60	52 53 54	60 61 62	58 59 60	55 58 59	50 53 54	53 54 55
	63 64 65	60 61 65	59 60 61	61 62 63	56 59 60	63 64 65	61 62 63	60 61 62	56 61 62	57 59 61
	67 68 69	67 68 69	62 63 64	65 66 67	63 64 67	66 67 68	64 65 67	63 65 67	63 66 68	62 63 64
	70 71 72 73	70 71 73 74	68 70 71 72 73 74	68 69 70 71 73 74	69 70 71 72 73 74	69 70 71 72 73	68 70 71 72 73 74	69 70 71 72 73	69 71 72 73 74	66 67 68 69 70 71
20	01467	13567	01236	5679	02345	12568	01235	01345	23457	03467
MHz	8 9 10 11	9 10 13	8 10 11	10 12 14	671112	9 11 12	8 9 10 12	7 8 10 11	9 11 13	8 10 11
	13 14 15	17 19 20	15 16 17	15 16 17	14 15 17	13 15 21	13 14 16	15 18 19	15 16 17	13 16 18
	16 20 21	21 22 23	19 21 22	21 22 23	19 21 22	22 25 26	22 25 26	20 21 26	21 23 24	21 22 23
	22 23 25	24 25 26	23 25 26	24 27 28	24 26 32	27 28 29	27 28 29	27 29 30	25 27 28	25 26 28
	26 28 29	27 28 30	28 29 30	29 30 31	36 37 40	30 31 32	31 32 33	31 33 35	29 31 33	29 32 35
	30 31 32	32 33 34	32 33 35	33 34 35	42 43 44	34 35 38	34 36 37	37 38 39	35 36 40	36 37 38
	33 34 36	35 36 39	38 39 40	36 37 39	47 48 49	39 40 41	38 39 43	40 41 43	42 43 44	43 44 46
	39 41 42	41 47 48	41 42 43	41 44 45	50 51 54	43 44 45	44 45 46	44 45 46	45 46 48	47 48 49
	44 45 54	49 50 51	44 46 49	47 49 50	56 57 60	46 53 57	48 49 52	47 48 49	49 51 52	53 54 57
	56 57 58	53 54 55	51 52 53	53 54 55	62 63 65	58 59 61	53 55 59	50 52 53	53 54 55	58 59 60
	60 61 63 66 67 68	57 58 59 60 61 64	54 57 59 60 62 63	56 57 59 64 65 66	66 67 70 71 73 76	62 63 64 65 66 68	61 62 63 64 70 71	55 56 58 60 62 64	56 57 59 61 63 64	61 64 66 67 68 69
	72 75 76	60 61 64 65 67 68	60 62 63 64 65 67	64 65 66 68 70 72	77 78 79	69 71 72	72 73 74	60 62 64 65 66 67	65 68 71	70 72 76
	77 79 81	75 76 77	69 71 72	75 76 77	81 82 83	73 75 77	75 77 78	69 70 71	76 77 78	77 78 80
	82 84 85	79 80 81	73 76 79	80 81 84	84 85 86	78 80 82	80 81 82	72 73 74	81 82 83	81 82 83

### Table 6.1.1.5-2: Numbers ( $n_{\rm PRB}$ ) of the 16QAM PRBs (FDD)

87 88 91	83 84 86	81 84 86	85 86 87	87 89 91	83 84 85	84 86 89	81 83 84	84 85 86	84 86 87
92 94 95	87 89 90	88 89 90	90 91 92	94 95 96	86 93 94	90 91 93	86 92 93	87 90 91	88 89 91
97 98 99	91 93 95	92 93 94	94 95 97	97 98 99	95 96 97	97 98 99	94 96 98	93 94 98	92 94 95
	99	99	98 99		99			99	96

## Table 6.1.1.5-3: Numbers ( $\mathit{n_{\rm PRB}}$ ) of the 16QAM PRBs (TDD)

Frame1	Subframe 0	Subframe 1	Subframe 5	Subframe 6	Subframe 7	Subframe 8	Subframe 9
1.4 MHz	0 3 4 5	1 2 3 4	0 1 2 4	0 1 3 4	0245	2345	1245
3 MHz	0 1 2 3 11 12	0 1 2 3 11 12	0 1 2 3 11 12	0 1 2 3 11 12	1 2 7 8 10 13	2346813	0368910
	14	13	14	13	14	14	14
5 MHz	12345678	02345678	12345678	12345678	1246789	02356710	0234678
	17 18 19 20	17 18 19 20	16 17 18 19	16 17 20 21	11 14 15 16	13 15 16 17	13 14 15 16
	21 23 24	21 22 24	20 21 22	22 23 24	18 21 23 24	19 20 21 24	19 21 23 24
10 MHz	1234679	23456789	2456789	14567811	0125678	24567910	25678910
	10 11 13 14	10 11 12 13	11 12 13 14	12 13 14 15	11 13 14 15	11 15 18 19	11 14 15 16
	15 17 18 19	14 16 17 18	16 18 20 21	17 19 20 21	16 18 20 21	20 21 24 25	18 19 20 21
	28 29 30 34	19 21 30 32	28 29 30 31	28 29 30 31	24 25 27 30	26 28 29 30	23 27 28 30
	35 37 38 39	34 35 36 37	32 33 34 41	32 34 37 38	32 34 35 37	32 33 35 36	32 33 34 37
	41 42 44 46	39 40 41 43	43 44 45 46	41 42 44 46	38 40 41 43	38 40 41 43	41 42 44 45
	47 48 49	45 48	47 48 49	47 48 49	46 47 49	44 48 49	46 47 49
15 MHz	13456789	2346789	01236789	37891011	0123469	0134589	1345789
	10 11 13 15	10 11 12 13	10 11 12 13	12 13 14 15	10 11 13 14	10 11 12 13	10 12 13 14
	16 17 19 20	14 15 16 18	16 17 18 19	16 17 22 23	15 16 17 20	14 15 16 19	15 16 17 19
	21 22 23 24	19 20 22 24	20 21 22 23	24 27 28 29	21 22 23 24	20 22 24 25	20 21 23 26
	25 26 27 28	25 27 28 30	24 26 27 28	30 31 32 41	25 28 29 34	26 27 28 31	27 28 29 30
	29 33 42 44	31 32 41 42	30 31 32 41	42 43 45 46	37 43 44 46	32 33 34 35	31 32 33 34
	45 46 51 52	43 44 45 46	43 45 46 47	48 49 50 53	47 48 49 51	36 37 38 40	36 37 38 39
	53 55 56 57	48 49 50 51	48 51 53 55	54 55 56 57	52 53 54 55	42 43 44 45	42 43 44 45
	58 59 60 61	52 55 58 61	56 57 58 61	58 60 61 62	57 59 61 62	46 47 48 50	46 52 53 57
	62 63 64 65	62 63 65 66	62 63 64 65	63 64 65 66	63 64 65 67	51 52 55 56	58 59 60 62
	66 70 71 72	67 68 69 70	66 69 70 71	67 68 69 70	68 69 70 71	59 60 61 66	63 64 65 69
	73 74	71 73 74	73 74	71 72 73 74	72 73 74	67 69 74	71 72 73
20 MHz	2456789	2458910	0234910	1 4 9 10 12 13	0134578	02456711	1345679
	10 11 12 13	11 12 13 14	11 12 13 14	14 15 17 18	12 13 14 15	12 13 14 16	10 13 16 18
	14 17 18 19	16 17 18 19	15 17 18 21	19 20 21 22	17 19 20 22	17 18 19 20	20 21 24 25
	20 21 22 23	22 24 25 26	22 23 24 25	23 29 30 31	23 25 26 28	21 23 27 28	26 27 28 30
	25 27 28 29	27 29 30 32	26 27 28 30	32 33 36 37	30 31 33 35	30 31 32 35	31 32 35 37
	31 32 33 34	33 36 37 38	31 32 35 36	39 40 41 42	37 38 39 41	37 38 40 43	38 41 42 43
	35 37 38 39	40 41 42 43	37 38 40 41	43 46 53 54	45 48 49 50	44 45 46 47	44 46 47 48
	43 44 46 53	45 46 53 54	42 43 53 54	55 56 57 58	51 58 59 62	50 51 53 56	50 51 52 53
	56 58 60 61	55 57 58 60	55 57 60 61	60 61 64 66	63 65 67 68	57 58 59 60	54 57 59 60
	68 69 70 71	62 64 65 66	63 64 65 66	68 69 71 72	69 70 71 72	61 62 63 64	61 62 64 67
	73 74 75 76	67 68 69 74	68 70 74 76	73 74 75 80	73 75 76 78	65 68 70 71	70 71 73 76
	78 79 80 82	78 82 83 84	77 81 82 84	82 83 84 86	82 84 85 86	73 77 79 80	77 78 79 81
	83 85 86 87	86 88 89 90	85 87 88 89	87 89 90 92	89 90 91 92	82 85 87 89	82 84 86 87
	88 93 95 97	91 92 93 95	93 94 95 97	93 94 95 96	93 94 96 97 98	92 95 96 97	88 91 95 98
	99	97 99	98 99	98 99	90	98	99

Frame2	Subframe 0	Subframe 1	Subframe 5	Subframe 6	Subframe 7	Subframe 8	Subframe 9
1.4 MHz	0 2 4 5	1 2 4 5	0 1 3 4	0 2 3 5	0124	1234	1235
3 MHz	0 1 2 3 12 13	0 1 2 3 11 12	1 2 3 11 12 13	0 1 2 11 12 13	2478910	0134513	0468911
	14	13	14	14	11	14	12
5 MHz	0234567	01234578	1234578	0134578	01367912	2345679	01345810
	16 17 18 19	16 17 18 19	16 17 18 20	16 17 18 19	14 17 18 20	11 12 14 15	11 12 14 16
	20 21 22 23	20 23 24	21 22 23 24	20 21 22 24	21 22 23 24	17 18 21 24	17 20 22 24
10 MHz	0126789	02346789	01235678	12345689	1 2 3 5 6 13	0125912	01234578
	11 13 14 15	10 11 12 15	9 10 13 14 15	10 11 12 13	14 15 16 17	13 14 16 17	9 10 12 13 14
	16 19 29 30	16 17 18 19	16 18 20 21	15 16 17 18	19 20 23 25	18 22 25 26	15 16 18 22
	32 34 35 36	20 29 31 33	28 29 30 31	19 21 30 35	26 27 29 30	27 28 29 30	27 28 29 30
	37 38 39 41	34 35 36 37	32 34 35 39	38 39 40 41	31 32 33 35	31 33 35 36	31 32 33 34
	42 43 44 45	42 45 46 47	40 41 42 44	42 43 46 47	38 39 40 41	38 39 41 42	42 43 45 46
	47 48 49	48 49	46	48 49	43 44 47 49	44 45 47 49	49
15 MHz	01234567	12345678	01245678	01234567	1345679	1 3 4 6 7 8 10	01256710
	8 10 11 14 15	9 10 11 13 14	9 10 11 12 13	8 9 10 11 13	10 11 12 14	11 13 14 15	11 12 16 17
	16 18 19 20	15 16 18 20	14 15 16 18	14 15 16 17	15 16 17 18	21 22 23 24	18 19 22 23
	21 23 24 25	21 22 23 27	20 22 24 25	18 19 21 23	19 20 21 22	26 27 28 29	25 27 28 29
	26 27 28 31	28 29 30 33	26 29 32 33	24 26 29 30	24 26 29 30	30 31 32 35	30 31 33 34
	32 33 41 43	42 43 45 46	44 45 46 49	33 41 42 45	32 33 34 35	39 40 43 44	35 36 37 39
	44 45 46 47	47 49 50 51	50 51 52 55	46 47 49 50	36 38 39 41	45 46 47 48	40 43 45 46
	48 50 52 53	54 55 56 58	56 57 58 59	51 53 54 55	42 44 45 47	49 50 51 52	47 48 49 50

	55 57 58 59	59 60 61 64	60 61 63 64	56 57 58 60	48 49 50 52	53 54 55 56	52 54 55 56
	61 63 65 66	65 66 68 69	65 66 68 69	62 63 66 67	55 56 57 61	57 58 59 60	58 61 62 63
	67 68 69 71	70 71 72 73	70 71 72 73	69 71 72 73	62 63 69 70	63 64 65 66	64 66 67 68
	74	74	74	74	71 73 74	68 71 74	69 71 73
20 MHz	01234578	02347810	0124567	01234678	0124689	0123789	3467910
	9 10 11 15 17	11 12 13 14	10 11 12 13	9 12 13 15 16	10 11 14 15	13 15 16 21	11 12 13 14
	19 20 21 24	15 16 17 18	14 15 16 18	18 19 20 22	18 19 20 21	23 24 25 29	15 17 19 22
	26 27 28 29	19 20 22 24	19 20 21 23	24 25 27 28	25 29 31 32	30 31 33 34	23 25 26 27
	31 32 33 34	25 27 30 35	24 25 29 32	29 30 32 35	34 36 37 38	36 37 38 39	33 34 37 39
	36 37 44 45	37 39 41 42	33 34 40 42	39 40 42 43	40 41 42 47	40 41 42 44	40 41 43 45
	54 56 57 58	44 53 56 57	43 44 45 46	44 57 59 60	52 53 54 57	45 46 47 48	46 47 48 49
	59 60 61 63	59 61 62 63	53 54 55 57	61 63 64 65	58 59 60 62	49 52 53 57	50 53 55 56
	65 67 68 69	66 67 69 70	59 60 61 62	66 67 68 69	63 64 65 67	60 62 63 64	58 60 61 62
	70 73 77 79	73 74 75 76	63 67 68 71	70 72 73 74	68 69 70 71	65 66 69 72	63 65 69 71
	83 85 86 87	77 78 79 80	72 73 75 77	75 76 81 82	73 74 75 76	73 74 75 77	72 73 74 76
	88 89 90 91	81 82 84 85	81 82 84 85	83 84 88 89	77 78 79 80	81 82 83 84	77 78 79 80
	92 93 94 95	86 88 89 90	87 91 92 93	90 92 94 95	84 85 86 87	86 88 89 90	82 83 85 87
	96 98 99	91 92 94 96	95 96 97 98	97 98 99	88 90 92 95	91 92 93 95	91 92 94 95
		98	99		99	97	96 99

### 6.1.1.6 E-UTRA Test Model 3.3 (E-TM3.3)

This model shall be used for tests on:

- Transmitted signal quality
  - Frequency error
  - EVM for QPSK modulation

### Table 6.1.1.6-1: Physical channel parameters of E-TM3.3

Parameter	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
Reference, Synchronisation Signals						
RS boosting, $P_B = E_B/E_A$	1	1	1	1	1	1
Synchronisation signal EPRE / E <sub>RS</sub> [dB]	0.000	2.189	2.580	2.427	2.477	2.427
Reserved EPRE / E <sub>RS</sub> [dB]	-inf	-inf	-inf	-inf	-inf	-inf
PBCH						
PBCH EPRE / E <sub>RS</sub> [dB]	0.000	2.189	2.580	2.427	2.477	2.427
Reserved EPRE / E <sub>RS</sub> [dB]	-inf	-inf	-inf	-inf	-inf	-inf
PCFICH						
# of symbols used for control channels	2	1	1	1	1	1
PCFICH EPRE / E <sub>RS</sub> [dB]	3.222	0	0	0	0	0
PHICH						
# of PHICH groups	1	1	1	2	2	3
# of PHICH per group	2	2	2	2	2	2
PHICH BPSK symbol power / E <sub>RS</sub> [dB]	-3.010	-3.010	-3.010	-3.010	-3.010	-3.010
PHICH group EPRE / E <sub>RS</sub> [dB]	0	0	0	0	0	0
PDCCH				1		
# of available REGs	23	23	43	90	140	187
# of PDCCH	2	2	2	5	7	10
# of CCEs per PDCCH	1	1	2	2	2	2
# of REGs per CCE	9	9	9	9	9	9
# of REGs allocated to PDCCH	18	18	36	90	126	180
# of <nil> REGs added for padding</nil>	5	5	7	0	14	7
PDCCH REG EPRE / E <sub>RS</sub> [dB]	0.792	2.290	1.880	1.065	1.488	1.195
<nil> REG EPRE / E<sub>RS</sub>[dB]</nil>	-inf	-inf	-inf	-inf	-inf	-inf
PDSCH			1	•	1	
# of QPSK PDSCH PRBs within a slot for which EVM is measured	3	7	13	25	38	50
$PRB \; P_{A} = E_{A} / E_{RS} [dB]$	-6 (*)	-6	-6	-6	-6	-6

# of 16QAM PDSCH PRBs within a slot for which EVM is not measured (used for power balancing only)	3	8	12	25	37	50	
$PRB \; P_{A} = E_{A} / E_{RS} \; [dB]$	2.427 (*)	2.189	2.580	2.427	2.477	2.427	l

Note (\*): in subframes containing PBCH or synchronisation signal REs, no PRB boosting/deboosting shall be applied, i.e. PRB  $P_A = E_A/E_{RS} = 0$  [dB]

	Subframe	Subframe	Subframe	Subframe	Subframe	Subframe	Subframe	Subframe	Subframe	Subframe
	0	1	2	3	4	5	6	7	8	9
1.4 MHz	235	123	013	123	235	125	025	025	125	135
3 MHz	0 1 2 3 11 12 13	0 3 4 10 11 12 13	02356 1113	0 1 4 5 7 10 12	0 2 3 4 9 10 13	0 1 2 3 11 12 14	4 5 6 8 11 13 14	2 5 6 9 12 13 14	03478 911	1 2 3 4 5 11 12
5 MHz	0 1 3 6 7 8 16 17 18 20 21 23 24	0 1 2 4 5 6 9 10 12 17 18 20 24	0 1 2 3 9 10 12 13 14 19 20 23 24	0 5 6 8 10 12 13 15 17 18 20 21 24	0 2 4 6 7 12 13 15 16 17 22 23 24	0 1 2 3 4 6 7 8 16 18 21 22 24	1 3 4 5 7 9 10 11 12 15 21 22 24	0 1 2 3 4 7 10 14 18 19 20 21 24	1 4 8 9 10 11 12 13 15 16 18 20 23	1 2 3 4 5 6 9 10 11 13 16 17 23
10 MHz	1 2 3 5 6 7 8 9 10 11 15 16 20 28 31 32 33 35 36 39 40 42 46 47 48	1 2 4 5 6 7 9 11 15 18 20 21 22 24 25 27 29 34 35 36 37 40 44 46 49	0 3 5 6 11 12 14 17 18 19 20 21 22 24 25 26 27 28 29 31 34 38 41 42 49	0 1 2 3 5 6 8 14 16 18 22 23 26 28 30 32 34 38 39 40 41 42 45 46 47	0 3 6 7 8 9 10 12 13 16 17 18 21 23 25 31 33 37 41 42 45 46 47 48 49	0 2 3 4 5 7 9 10 11 12 13 15 19 20 28 29 30 31 34 36 37 42 44 48 49	0 1 4 5 6 8 9 10 13 16 17 18 19 20 21 24 29 30 31 32 35 37 38 39 47	0 2 3 4 5 6 7 9 10 12 16 17 18 19 22 24 25 26 30 31 34 37 42 45 48	5 7 8 9 14 15 16 21 22 27 28 30 31 32 34 35 37 38 41 42 43 44 46 48 49	3 9 11 13 16 17 18 21 24 27 28 29 30 32 34 37 38 39 40 41 42 45 47 48 49
15 MHz	$\begin{array}{c} 0 \ 1 \ 2 \ 3 \ 5 \\ 6 \ 7 \ 8 \ 9 \ 12 \\ 16 \ 17 \ 18 \\ 19 \ 20 \ 21 \\ 23 \ 24 \ 25 \\ 28 \ 29 \ 30 \\ 31 \ 32 \ 33 \\ 42 \ 47 \ 48 \\ 49 \ 53 \ 60 \\ 63 \ 65 \ 67 \\ 68 \ 70 \ 71 \\ 73 \end{array}$	0 1 3 4 5 6 7 8 11 18 20 21 24 25 26 27 29 30 31 38 46 47 49 50 51 53 54 55 57 59 60 61 67 68 69 70 73 74	2 11 12 13 15 17 18 21 22 24 25 26 29 31 32 33 34 40 42 45 46 47 50 51 52 54 58 59 60 61 62 63 64 68 70 71 72 74	2 3 4 6 7 9 11 12 15 17 20 24 27 30 33 34 35 38 39 42 43 45 46 48 49 55 56 59 60 61 62 65 67 69 70 71 73 74	4 5 6 8 10 13 17 22 25 26 27 28 29 30 31 32 33 34 35 38 41 44 46 48 50 52 53 54 56 59 60 64 67 69 70 71 73 74	0 2 3 4 7 8 11 14 18 20 23 24 25 27 29 42 43 45 46 47 48 49 50 51 54 56 60 62 63 65 66 67 68 69 70 71 72 73	1 2 9 11 14 15 18 25 26 28 29 30 31 32 33 36 37 38 39 41 43 45 46 50 53 54 58 59 60 62 63 65 67 68 70 71 72 73	3 4 6 7 8 11 12 19 20 23 24 26 27 28 30 33 34 35 40 41 42 46 49 51 53 54 58 59 60 61 62 65 67 69 70 71 72 73	0 1 2 3 7 8 9 10 13 14 15 17 18 19 22 23 24 25 26 27 28 32 36 37 39 46 47 50 53 56 61 62 63 68 69 71 73 74	0 3 7 8 11 13 14 16 18 19 23 25 27 28 29 30 32 35 41 42 44 46 47 48 50 53 55 57 59 61 62 64 66 67 68 69 70 71
20 MHz	0 1 4 6 10 13 14 15 16 20 22 23 25 26 28 29 30 31 32 33 36 39 41 42 44 45 54 56 57 60 63 66 67 68 72 76 77 79 82 84 85 87 88 91 92 94 95 97 98	$\begin{array}{c} 1 \ 3 \ 7 \ 9 \\ 10 \ 13 \ 19 \\ 20 \ 21 \ 22 \\ 23 \ 24 \ 25 \\ 26 \ 27 \ 30 \\ 33 \ 34 \ 35 \\ 36 \ 47 \ 48 \\ 49 \ 50 \ 51 \\ 53 \ 54 \ 55 \\ 57 \ 59 \ 60 \\ 61 \ 64 \ 65 \\ 67 \ 68 \ 75 \\ 76 \ 77 \ 80 \\ 81 \ 83 \ 84 \\ 86 \ 87 \ 89 \\ 90 \ 93 \ 95 \\ 99 \end{array}$	$\begin{array}{c} 1 2 3 6 8 \\ 10 11 15 \\ 16 17 19 \\ 21 25 26 \\ 28 29 30 \\ 32 33 35 \\ 38 39 40 \\ 41 42 43 \\ 44 46 49 \\ 51 52 54 \\ 60 62 63 \\ 64 65 69 \\ 72 76 79 \\ 81 84 86 \\ 88 89 90 \\ 93 94 99 \end{array}$	$\begin{array}{c} 5\ 7\ 9\ 10\\ 12\ 14\ 15\\ 16\ 21\ 22\\ 23\ 24\ 27\\ 28\ 29\ 30\\ 33\ 34\ 35\\ 36\ 37\ 39\\ 41\ 44\ 45\\ 47\ 49\ 54\\ 55\ 56\ 57\\ 64\ 66\ 68\\ 70\ 72\ 76\\ 77\ 80\ 81\\ 85\ 86\ 87\\ 90\ 91\ 92\\ 94\ 95\ 98\\ 99\end{array}$	$\begin{array}{c} 2 \ 3 \ 4 \ 5 \ 6 \\ 7 \ 14 \ 15 \\ 17 \ 19 \ 21 \\ 22 \ 24 \ 26 \\ 37 \ 40 \ 42 \\ 43 \ 44 \ 47 \\ 49 \ 51 \ 54 \\ 56 \ 57 \ 60 \\ 62 \ 63 \ 65 \\ 66 \ 67 \ 70 \\ 71 \ 73 \ 76 \\ 77 \ 78 \ 81 \\ 82 \ 83 \ 84 \\ 85 \ 86 \ 87 \\ 89 \ 94 \ 95 \\ 96 \ 97 \ 99 \end{array}$	$\begin{array}{c} 1\ 2\ 5\ 6\ 8\\ 9\ 12\ 13\\ 21\ 22\ 25\\ 26\ 27\ 28\\ 29\ 31\ 32\\ 34\ 35\ 39\\ 40\ 43\ 45\\ 46\ 53\ 57\\ 59\ 61\ 62\\ 63\ 64\ 66\\ 68\ 69\ 71\\ 73\ 75\ 77\\ 78\ 82\ 83\\ 84\ 85\ 86\\ 93\ 94\ 95\\ 96\ 97\ 99\end{array}$	$\begin{array}{c} 0 \ 1 \ 2 \ 3 \ 5 \\ 8 \ 9 \ 10 \ 12 \\ 13 \ 22 \ 25 \\ 26 \ 27 \ 29 \\ 31 \ 32 \ 33 \\ 36 \ 37 \ 38 \\ 39 \ 43 \ 45 \\ 48 \ 49 \ 52 \\ 53 \ 55 \ 59 \\ 62 \ 63 \ 64 \\ 71 \ 72 \ 73 \\ 74 \ 75 \ 77 \\ 78 \ 81 \ 82 \\ 84 \ 86 \ 89 \\ 91 \ 93 \ 97 \\ 98 \ 99 \end{array}$	$\begin{array}{c} 0 \ 1 \ 3 \ 4 \ 5 \\ 7 \ 10 \ 11 \\ 15 \ 18 \ 19 \\ 20 \ 21 \ 26 \\ 27 \ 29 \ 30 \\ 31 \ 33 \ 35 \\ 39 \ 40 \ 41 \\ 43 \ 44 \ 46 \\ 47 \ 49 \ 50 \\ 53 \ 55 \ 56 \\ 62 \ 64 \ 65 \\ 66 \ 67 \ 69 \\ 70 \ 71 \ 72 \\ 74 \ 83 \ 84 \\ 86 \ 92 \ 93 \\ 94 \ 96 \ 98 \end{array}$	$\begin{array}{c} 2\ 3\ 4\ 7\ 9\\ 11\ 13\ 15\\ 16\ 24\ 25\\ 27\ 29\ 31\\ 33\ 35\ 36\\ 40\ 43\ 44\\ 45\ 46\ 49\\ 51\ 52\ 53\\ 54\ 55\ 56\\ 57\ 59\ 63\\ 64\ 65\ 68\\ 71\ 77\ 78\\ 81\ 82\ 83\\ 84\ 85\ 86\\ 90\ 91\ 93\\ 94\ 98\ 99\end{array}$	$\begin{array}{c} 0 \ 4 \ 6 \ 7 \ 8 \\ 10 \ 11 \ 13 \\ 16 \ 18 \ 21 \\ 22 \ 23 \ 26 \\ 29 \ 32 \ 35 \\ 36 \ 37 \ 43 \\ 44 \ 46 \ 47 \\ 48 \ 49 \ 53 \\ 54 \ 57 \ 59 \\ 60 \ 61 \ 64 \\ 66 \ 67 \ 68 \\ 69 \ 70 \ 72 \\ 76 \ 78 \ 80 \\ 81 \ 82 \ 84 \\ 87 \ 89 \ 91 \\ 92 \ 95 \ 96 \end{array}$

### Table 6.1.1.6-2: Numbers ( $\mathit{n}_{\rm PRB}$ ) of the QPSK PRBs (FDD)

Table 6.1.1.6-3: Numbers (  $n_{\rm PRB}$  ) of the QPSK PRBs (TDD)

Frame1	Subframe 0	Subframe 1	Subframe 5	Subframe 6	Subframe 7	Subframe 8	Subframe 9
1.4 MHz	1 3 4	1 4 5	0 1 2	0 2 4	245	034	125
3 MHz	0 1 2 3 11 12	0 1 2 3 11 12	0 1 2 3 11 12	0 1 2 3 11 12	1 2 7 8 10 13	2346813	0368910
	14	13	14	13	14	14	14
5 MHz	12356817	01234578	1235678	1234568	1 2 3 8 12 13	1 4 5 6 7 10	1246789

	18 19 20 21	17 18 19 20	17 18 19 20	16 17 19 20	14 17 20 21	11 13 14 15	14 16 18 21
	23 24	22	21 24	22 23	22 23 24	16 22 23	23 24
10 MHz	2346710	1345679	2346789	25891112	1456711	01567811	1256811
	11 13 15 17	10 12 14 16	10 11 13 14	13 14 16 18	12 13 14 15	12 13 15 19	13 14 15 16
	18 19 29 30	17 28 30 34	16 18 19 20	20 21 28 29	17 20 21 26	20 26 28 29	18 20 21 24
	34 35 37 38	35 36 37 38	21 29 32 34	30 31 32 33	27 31 32 34	30 31 32 37	25 27 30 32
	39 41 42 46	39 40 41 43	39 41 43 44	34 42 44 45	37 38 41 42	38 42 43 44	34 35 37 40
	47 48 49	44 48	45 46	46 47 49	46 48 49	47 49	43 46 47
15 MHz	1356910	3456789	3 4 7 8 10 11	2678910	0123789	3 7 10 11 13	1 3 8 9 11 12
	11 13 15 17	10 13 14 15	12 13 14 16	11 13 16 17	10 11 12 17	15 16 17 23	13 14 15 17
	20 21 23 24	16 19 20 21	18 19 20 22	18 19 20 21	19 21 22 23	27 29 30 31	22 23 24 25
	25 26 27 28	22 24 25 28	24 25 27 28	22 23 26 30	24 27 28 30	32 35 36 37	28 29 30 31
	29 33 42 44	31 32 33 43	30 32 41 42	31 41 43 45	31 32 37 40	40 42 43 45	34 37 40 41
	45 51 52 53	45 46 49 51	43 44 45 46	46 47 48 51	41 45 48 51	46 48 49 50	42 46 48 49
	56 57 58 61	52 55 58 59	48 50 51 62	55 57 58 62	53 55 56 57	53 54 57 60	51 54 55 56
	62 63 65 66	60 61 62 64	65 67 68 69	63 64 65 69	58 61 63 65	62 64 65 66	61 62 63 67
	70 71 73 74	66 67 72	70 71 73 74	70 71 73 74	66 70 73	67 68 69 72	70 71 73 74
						74	
20 MHz	2478910	45678911	23458910	0 2 3 4 10 11	4 9 12 13 15	0 1 4 10 12 14	0134578
	11 12 13 14	12 13 14 16	11 12 14 15	12 13 14 17	17 19 20 21	15 17 18 19	12 13 14 15
	18 20 21 23	17 19 20 22	17 18 19 22	18 22 23 25	22 29 30 31	23 28 29 30	17 19 20 22
	25 27 28 31	25 27 29 33	24 26 27 28	26 27 28 30	36 37 39 40	31 32 33 37	23 25 26 30
	32 34 35 37	37 38 40 41	30 32 35 36	31 32 36 37	41 42 43 46	38 39 42 46	32 33 35 37
	38 39 44 46	42 43 44 45	37 40 41 42	38 40 41 43	48 49 50 53	55 61 64 65	38 39 41 44
	53 56 58 60	53 54 57 58	46 53 55 58	54 55 57 58	54 56 57 58	66 68 69 70	45 48 49 50
	61 68 69 70	61 62 65 67	60 61 62 63	60 61 63 64	60 64 66 71	71 72 73 74	51 58 59 62
	71 74 75 76	68 70 73 78	64 65 66 68	66 68 70 74	72 73 74 75	76 78 82 83	63 67 68 70
	78 79 80 82	80 82 83 86	74 77 82 84	76 77 81 82	80 82 83 86	84 85 86 89	72 75 82 84
	83 85 87 88	88 89 90 91	85 87 92 93	84 85 87 88	87 89 90 92	90 91 93 94	85 90 92 93
	93 95 97 99	93 95 97	97 98 99	92 94 95 98	94 95 96 98	96 97 98 99	94 96 98
					99		

Frame2	Subframe 0	Subframe 1	Subframe 5	Subframe 6	Subframe 7	Subframe 8	Subframe 9
1.4 MHz	1 2 3	1 3 5	0 1 4	0 3 4	134	245	012
3 MHz	0 1 2 3 12 13	0 1 2 3 11 12	1 2 3 11 12 13	0 1 2 11 12 13	2478910	0134513	0468911
	14	13	14	14	11	14	12
5 MHz	0235678	0234567	01234567	1234578	1235710	1 4 5 9 11 13	34578910
	16 17 19 20	16 18 19 22	17 18 20 21	16 17 19 20	12 14 16 18	15 18 20 21	11 12 13 14
	21 24	23 24	23	22 24	20 21 24	22 23 24	18 24
10 MHz	2567910	2468910	02578911	01246789	02367810	01256789	0136910
	11 15 19 20	11 14 15 16	14 15 16 18	11 13 14 18	11 12 15 16	10 15 16 17	13 14 20 21
	21 28 29 30	18 19 20 21	19 32 33 34	19 29 34 35	19 20 22 24	18 22 23 25	22 23 25 28
	32 33 35 36	28 30 32 37	36 38 41 42	36 39 41 42	25 29 31 33	26 28 29 30	29 30 31 34
	38 40 41 43	40 43 44 45	43 44 45 46	44 45 47 48	35 37 42 46	31 32 39 41	35 36 39 40
	44 48 49	46 47 49	48 49	49	47 49	46	42 44 47
15 MHz	02346910	0134589	0158910	23457810	1234578	01234567	13568910
	11 13 14 15	10 12 14 15	13 14 15 20	12 15 16 17	14 18 19 20	8 11 13 14 15	11 13 14 16
	16 17 20 21	16 19 20 22	21 23 26 27	18 19 23 24	21 24 25 27	16 20 21 23	18 20 22 28
	22 23 28 29	24 25 26 27	28 29 30 32	26 28 30 31	28 33 35 38	24 27 33 35	29 30 35 36
	43 44 48 51	28 29 31 33	33 42 43 44	32 33 41 44	40 43 45 46	41 43 44 45	37 38 42 43
	52 53 54 55	42 43 46 47	45 47 51 52	45 46 47 48	47 50 52 53	47 48 50 51	46 47 49 50
	57 59 61 63	48 50 51 52	55 57 59 60	50 52 53 57	55 58 61 62	52 64 65 68	51 55 56 59
	64 65 67 68	56 59 61 67	62 64 65 66	58 59 61 63	63 65 66 67	69 70 71 73	60 61 68 69
	70 72 73	69 71 74	69 71 72 73	65 66 71	68 71 74	74	72 73 74
20 MHz	0256711	34567910	0 1 2 3 4 5 10	12345789	02371112	01256810	12346789
	12 13 14 16	13 16 20 21	11 15 18 19	11 15 17 19	13 14 15 16	11 12 13 14	15 18 19 20
	17 18 19 20	23 24 25 26	20 21 24 25	20 21 22 24	17 18 19 20	15 16 20 21	21 23 24 25
	21 27 28 30	28 30 31 32	26 27 28 32	27 28 29 30	22 25 27 30	24 27 29 33	28 29 30 32
	31 35 37 38	35 37 38 41	33 34 37 44	31 32 33 36	35 37 39 42	34 39 40 42	35 39 44 45
	40 43 44 45	42 43 44 46	54 57 58 59	41 44 45 56	44 48 49 52	43 46 48 50	47 48 51 53
	46 53 56 57	53 54 59 60	60 61 62 63	57 61 62 63	53 59 62 63	54 59 60 61	55 57 60 61
	59 60 61 62	61 62 64 67	65 67 70 71	66 67 68 69	67 69 73 74	66 70 71 75	62 63 67 68
	63 64 65 68	70 71 76 77	73 77 78 83	73 79 80 82	75 76 77 78	76 78 79 82	72 73 74 75
	70 73 77 79	78 79 81 82	84 85 88 89	85 86 87 91	79 80 81 84	84 85 87 89	76 77 81 90
	80 82 85 87	84 86 87 88	90 91 92 94	92 93 95 96	85 86 88 91	90 91 95 96	92 93 95 96
	89 92 95 97	95 98 99	95 98 99	98 99	92 94 96 98	97 98 99	97 99

### 6.1.2 Data content of Physical channels and Signals

Randomisation of the data content is obtained by utilizing the length-31 Gold sequence scrambling of TS36.211, Clause 7.2 [12] which is invoked by all physical channels prior to modulation and mapping to the RE grid. An appropriate number of "0" bits shall be generated prior to the scrambling.

In case multiple carriers are configured with E-TMs, the  $N_{\rm 1D}^{\rm cell}$  shall be incremented by 1 for each additional configured carrier.

Initialization of the scrambler and RE-mappers as defined in TS36.211 [12] use the following additional parameters:

- $n_{\rm f} = 0$  (used for PBCH)
- The E-TM shall start when  $n_s = 0$
- $N_{\rm ID}^{\rm cell} = 1$  for the lowest configured carrier,  $N_{\rm ID}^{\rm cell} = 2$  for the 2<sup>nd</sup> lowest configured carrier,...,  $N_{\rm ID}^{\rm cell} = n$  for the n<sup>th</sup> configured carrier
- p = 0 (data generated according to definitions in TS36.211 for antenna port 0). p = 0 shall be used for the generation of the E-TM data, even if the signal is transmitted on a physical port other than port 0.
- q = 0 (single code word)

#### 6.1.2.1 Reference signals

Sequence generation, modulation and mapping to REs according to TS36.211, clause 6.10.1

#### 6.1.2.2 Primary Synchronization signal

Sequence generation, modulation and mapping to REs according to TS36.211, clause 6.11.1

### 6.1.2.3 Secondary Synchronization signal

Sequence generation, modulation and mapping to REs according to TS36.211, clause 6.11.2

#### 6.1.2.4 PBCH

- 240 REs (480 bits) are available for PBCH for the duration of the E-UTRA test models (1 frame, 10 ms)
- Generate 480 bits of "all 0" data
- Initialize scrambling generator for each invocation of the E-TM, i.e. set always  $n_f = 0$
- Perform scrambling according to TS36.211, clause 6.6.1 of the 480 bits
- Perform modulation according to TS36.211, clause 6.6.2
- Perform mapping to REs according to TS36.211, clause 6.6.4

#### 6.1.2.5 PCFICH

- Generate 32 bit CFI codeword according to TS36.212, clause 5.3.4.
- Perform scrambling according to TS36.211, clause 6.7.1
- Perform modulation according to TS36.211, clause 6.7.2
- Perform mapping to REs according to TS36.211, clause 6.7.4

#### 6.1.2.6 PHICH

- PHICH duration is assumed as "Normal" according to TS36.211, clause 6.9.3
- Set  $N_{\rm g} = 1/6$  to obtain  $N_{\rm PHICH}^{\rm group}$ , see TS36.211, clause 6.9
- Use 2 PHICH per group,  $n_{\text{PHICH}}^{\text{seq}} = 0, 4$
- For frame structure type 2 the factor  $m_i$  shall not be set as per TS36.211, Table 6.9-1, but instead shall be set to  $m_i = 1$  for all transmitted subframes (Note).

- For each subframe the required amount of HARQ Indicators (HI) is as follows:  $N_{PHICH}^{group}$  \*(2 PHICH per group).
- Generate this amount of HIs using "0" data for each HI.
- Generate 3 bit HI codeword according to TS36.212, clause 5.3.5
- Perform scrambling and modulation according to TS36.211, clause 6.9.1
- Perform mapping to REs according to TS36.211, clause 6.9.3

Note: this is in order to preserve commonality between FDD and TDD E-TM.

#### 6.1.2.7 PDCCH

- For each subframe the required amount of bits for all PDCCHs is as follows: (# of PDCCH)\*(# of CCE per PDCCH)\* (9 REG per CCE)\*(4 RE per REG)\*(2 bits per RE) with these parameters according to the E-TM definitions in subclause 6.1.1
- Generate this amount of bits according to "all 0" data
- Numbering of CCEs shall be according to TS36.211, clause 6.8.1. Mapping of PDCCHs to the available CCEs is performed as follows: First PDCCH is mapped to CCE(0), second PDCCH to CCE(0+ "# of CCEs per PDCCH"), ... etc. The remaining resources not used for PDCCH are treated as <NIL> REGs according to TS36.211, clause 6.8.2
- Perform PDCCH multiplexing and scrambling according to TS36.211, clause 6.8.2
- Perform modulation according to TS36.211, clause 6.8.3
- Perform mapping to REs according to TS36.211, clause 6.8.5

### 6.1.2.8 PDSCH

- For each subframe generate the required amount of bits for all PRBs according to "all 0" data
- PRB numbering is according to TS36.211, clause 6.2.3
- E-TMs utilize 1 user or 2 user PDSCH transmissions distinguished by  $n_{\text{RNTI}}$ . For each E-TM, PRBs are mapped to

users ( $n_{\text{RNTI}}$ ) according to their respective PRB attribute as follows:

	n <sub>RNTI</sub>
E-TM1.1	0 for all PRBs
E-TM1.2	0 for boosted PRBs or those with $P_A = 0dB$
	1 for de-boosted PRBs
E-TM2	0 for all PRBs
E-TM3.1	0 for all PRBs
E-TM3.2	0 for QPSKPRBs
	1 for 16QAM PRBs
E-TM3.3	0 for 16QAM PRBs
	1 for QPSK PRBs

#### Table 6.1.2.8-1: Mapping of PRBs to $n_{\text{RNTI}}$ for each E-TM

- The required amount of PDSCH "0" bits within a subframes and allocated PRBs shall be generated for each user
- Perform user specific scrambling according to TS36.211, clause 6.3.1. This makes use of  $n_{\text{RNTI}}$ .
- Perform modulation of the scrambled bits with the modulation scheme defined for each user according to TS36.211, clause 6.3.2
- Perform mapping of the complex-valued symbols to PRBs according to TS36.211, clause 6.3.5

### 6.2 Base station output power

### 6.2.1 Definition and applicability

Output power, Pout, of the base station is the mean power of one carrier delivered to a load with resistance equal to the nominal load impedance of the transmitter.

The maximum total output power (Pmax), of the base station is the mean power level measured at the antenna connector during the transmitter ON period in a specified reference condition.

Rated total output power of the base station is the mean power for BS operating in single carrier, multi-carrier, or carrier aggregation configurations that the manufacturer has declared to be available at the antenna connector during the transmitter ON period.

Base station maximum output power (Pmax,c), of the base station is the mean power level per carrier measured at the antenna connector during the transmitter ON period in a specified reference condition.

Rated output power, PRAT, of the base station is the mean power level per carrier for BS operating in single carrier, multi-carrier, or carrier aggregation configurations that the manufacturer has declared to be available at the antenna connector during the transmitter ON period.

NOTE: Different PRATs may be declared for different configurations

In certain regions, the minimum requirement for normal conditions may apply also for some conditions outside the ranges defined for the Normal test environment in Annex D.

The rated output power, PRAT, of the BS shall be as specified in Table 6.2.1-1

	BS class	PRAT	
	Wide Area BS	- (note)	
	Medium Range BS	<u>&lt;</u> + 38 dBm	
	Local Area BS	<u>&lt;</u> + 24 dBm	
	Home BS	<ul> <li>≤ + 20 dBm (for one transmit antenna port)</li> <li>≤ + 17 dBm (for two transmit antenna ports)</li> <li>≤ + 14 dBm (for four transmit antenna ports)</li> <li>&lt; + 11 dBm (for eight transmit antenna ports)</li> </ul>	
NOTE:	There is no upper limit required for the rated output power of the Wide Area Base Station.		

#### Table 6.2.1-1: Base Station rated output power

### 6.2.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.2.

### 6.2.3 Test purpose

The test purpose is to verify the accuracy of the maximum output power across the frequency range and under normal and extreme conditions for all transmitters in the BS.

### 6.2.4 Method of test

#### 6.2.4.1 Initial conditions

Test environment: normal; see Annex D2.

RF channels to be tested for single carrier: B, M and T; see subclause 4.7

RF bandwidth positions to be tested for multi-carrier and/or CA:  $B_{RFBW}$ ,  $M_{RFBW}$  and  $T_{RFBW}$  in single-band operation, see subclause 4.7.1;  $B_{RFBW}$ -T"<sub>RFBW</sub> and B"<sub>RFBW</sub>-T<sub>RFBW</sub> in multi-band operation, see subclause 4.7.1.

In addition, on one RF channel or RF bandwidth position in case of multi-carrier and/or CA only, the test shall be performed under extreme power supply as defined in Annex D.5.

NOTE: Tests under extreme power supply also test extreme temperature.

1) Connect the power measuring equipment to the base station antenna connector as shown in Annex I.1.1.

# 6.2.4.2 Procedure

1) For a BS declared to be capable of single carrier operation only, set the base station to transmit a signal according to E-TM1.1.

For a BS declared to be capable of multi-carrier and/or CA operation, set the base station to transmit according to E-TM1.1 on all carriers configured using the applicable test configuration and corresponding power setting specified in sub-clause 4.10 and 4.11.

2) Measure the mean power for each carrier at the antenna connector.

In addition, for a multi-band capable BS, the following steps shall apply:

- 3) For multi-band capable BS and single band tests, repeat the steps above per involved band where single band test configurations and test models shall apply with no carrier activated in the other band.
- 4) For multi-band capable BS with separate antenna connector, the antenna connector not being under test in case of single-band or multi-band test shall be terminated.

# 6.2.5 Test Requirements

In normal conditions, the measurement result in step 2 of 6.2.4.2 shall remain:

within +2.7 dB and –2.7 dB of the manufacturer's rated output power for carrier frequency  $f \leq 3.0 GHz.$ 

within +3.0 dB and –3.0 dB of the manufacturer's rated output power for carrier frequency 3.0GHz <  $f \leq 4.2GHz.$ 

In extreme conditions, measurement result in step 2 of 6.2.4.2 shall remain:

within +3.2 dB and –3.2 dB of the manufacturer's rated output power for carrier frequency  $f \leq 3.0 GHz.$ 

- within +3.5 dB and –3.5 dB of the manufacturer's rated output power for carrier frequency  $3.0GHz < f \le 4.2GHz$ .
- NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance are given in Annex G.

# 6.2.6 Home BS output power for adjacent UTRA channel protection

# 6.2.6.1 Definition and applicability

The Home BS shall be capable of adjusting the transmitter output power to minimize the interference level on the adjacent channels licensed to other operators in the same geographical area while optimize the Home BS coverage. These requirements are only applicable to Home BS. The requirements in this clause are applicable for AWGN radio propagation conditions.

The output power, Pout, of the Home BS shall be as specified in Table 6.2.6-1 under the following input conditions:

- CPICH Êc, measured in dBm, is the code power of the Primary CPICH on one of the adjacent channels present at the Home BS antenna connector for the CPICH received on the adjacent channels. If Tx diversity is applied on

the Primary CPICH, CPICH Êc shall be the sum in [W] of the code powers of the Primary CPICH transmitted from each antenna.

- Ioh, measured in dBm, is the total received power density, including signals and interference but excluding the own Home BS signal, present at the Home BS antenna connector on the Home BS operating channel.

In case that both adjacent channels are licensed to other operators, the most stringent requirement shall apply for Pout. In the case when one of the adjacent channels is licensed to an E-UTRA operator while the other adjacent channel is licensed to a UTRA operator, the more stringent requirement of this subclause and subclause 6.2.7 shall apply for Pout. In case the Home BS''s operating channel and both adjacent channels are licensed to the same operator, the requirements of this clause do not apply.

The input conditions defined for the requirements in this section are specified at the antenna connector of the Home BS. For Home BS receivers with diversity, the requirements apply to each antenna connector separately, with the other one(s) terminated or disabled. The requirements are otherwise unchanged. For Home BS(s) without measurement capability, a reference antenna with a gain of 0 dBi is assumed for converting these power levels into field strength requirements.

#### Table 6.2.6-1: Home BS output power for adjacent operator UTRA channel protection

Input Conditions	Output power, Pout
Ioh > CPICH Êc + 43 dB And CPICH Êc ≥ -105dBm	≤ 10 dBm
loh ≤ CPICH Êc + 43 dB and CPICH Êc ≥ -105dBm	≤ max(8 dBm, min(20 dBm, CPICH Êc + 100 dB))

- NOTE 1: The Home BS transmitter output power specified in Table 6.2.6-1 assumes a Home BS reference antenna gain of 0 dBi, an target outage zone of 47dB around the Home BS for an UE on the adjacent channel, with an allowance of 2 dB for measurement errors, an ACIR of 33 dB, an adjacent channel UE CPICH Ec/Io target of -18 dB and the same CPICH Êc value at the adjacent channel UE as for the Home BS.
- NOTE 2: For CPICH  $\hat{E}c < -105$  dBm, the requirements in subclause 6.2 apply.
- NOTE 3: The output power Pout is the sum transmit power across all the antenna connectors of the Home BS, with each transmit power measured at the respective antenna connectors.

#### 6.2.6.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.2.3.

## 6.2.6.3 Test purpose

The test purpose is to verify the capability of the Home BS to adjust the transmitter output power according to the input conditions, as specified in Table 6.2.6-1, across the frequency range and under normal and extreme conditions for all transmitters in the BS.

### 6.2.6.4 Method of test

#### 6.2.6.4.1 Initial conditions

Test environment: normal; see Annex D2.

RF channels to be tested for single carrier: M; see subclause 4.7.

In addition, on one UARFCN only, the test shall be performed under extreme power supply as defined in Annex D.5.

NOTE: Tests under extreme power supply also test extreme temperature.

Signal generators delivering co-channel and adjacent channel interferers are switched off.

1) Set-up the equipment as shown as shown in Annex I.1.4.

2) The Home BS is configured such that the adjacent channel is known to belong to another operator.

#### 6.2.6.4.2 Procedure

- 1) Connect the combined downlink interfering signals (referred to as point D in Figure I.1-4) to the dedicated measurement port (referred to as point 1 in Figure I.1-4) if available, otherwise connect to point 2.
- Configure the signal generator for co-channel interference to transmit AWGN over a bandwidth according to BW<sub>Config</sub> centred on RF channel M.
- Configure the signal generator for adjacent channel DL signal to transmit test model 1 in subclause 6.1.1.1 in [17] at the centre frequency equal to RF channel M + BW<sub>Channel</sub>/2 + 2.5 MHz.
- 4) Switch on signal generators delivering co-channel and adjacent channel interferers, and adjust the ATT1 and ATT2 such that CPICH  $\hat{E}c = -80 \text{ dBm}$  and Ioh = -50 dBm.
- 5) Trigger the Home BS power adjustment mechanism.
- 6) Configure the Home BS to transmit a signal according to E-TM1.1.
- NOTE: The signal shall be transmitted with the maximum allowed output power.
- Measure Home BS output power, Pout, and check it is below the required value according to the CPICH Êc and Ioh values determined in step 4.
- 8) Repeat steps 3) to 7) with the frequency in step 3 set to RF channel M BW<sub>Channel</sub> /2 2.5 MHz.
- 9) Repeat steps 3) to 8) with different settings for ATT1 and ATT2 to arrive the CPICH Êc and Ioh pairs as specified in Table 6.2.6-2.

Test Case	CPICH Êc (dBm)	loh (dBm)
2	-90	-60
3	-100	-70
4	-100	-50

#### Table 6.2.6-2: CPICH Êc and loh pairs

#### 6.2.6.5 Test Requirements

In normal operating conditions, the output power, Pout, of the Home BS shall be equal to or less than:

the value specified in Table 6.2.6-1 plus 2.7 dB for carrier frequency  $f \le 3.0$ GHz.

the value specified in Table 6.2.6-1 plus 3.0 dB for carrier frequency 3.0GHz < f  $\leq$  4.2GHz.

In extreme operating conditions, the output power, Pout, of the Home BS shall be equal to or less than:

the value specified in Table 6.2.6-1 plus 3.2 dB for carrier frequency  $f \le 3.0$ GHz.

the value specified in Table 6.2.6-1 plus 3.5 dB for carrier frequency 3.0GHz < f  $\leq$  4.2GHz.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance are given in Annex G.

# 6.2.7 Home BS output power for adjacent E-UTRA channel protection

# 6.2.7.1 Definition and applicability

The Home BS shall be capable of adjusting the transmitter output power to minimize the interference level on the adjacent channels licensed to other operators in the same geographical area while optimize the Home BS coverage. These requirements are only applicable to Home BS. The requirements in this clause are applicable for AWGN radio propagation conditions.

The output power, Pout, of the Home BS shall be as specified in Table 6.2.7-1 under the following input conditions:

- CRS Ês, measured in dBm, is the Reference Signal Received Power per resource element on one of the adjacent channels present at the Home BS antenna connector for the Reference Signal received on the adjacent channels. For CRS Ês determination, the cell-specific reference signal R0 according TS 36.211 [12] shall be used. If the Home BS can reliably detect that multiple TX antennas are used for transmission on the adjacent channel, it may use the average in [W] of the CRS Êc on all detected antennas.
- Ioh, measured in dBm, is the total received power density, including signals and interference but excluding the own Home BS signal, present at the Home BS antenna connector on the Home BS operating channel.

In case that both adjacent channels are licensed to other operators, the most stringent requirement shall apply for Pout. In the case when one of the adjacent channels is licensed to an E-UTRA operator while the other adjacent channel is licensed to a UTRA operator, the more stringent requirement of this subclause and subclause 6.2.6 shall apply for Pout. In case the Home BS"s operating channel and both adjacent channels are licensed to the same operator, the requirements of this clause do not apply.

The input conditions defined for the requirements in this section are specified at the antenna connector of the Home BS. For Home BS receivers with diversity, the requirements apply to each antenna connector separately, with the other one(s) terminated or disabled. The requirements are otherwise unchanged. For Home BS(s) without measurement capability, a reference antenna with a gain of 0 dBi is assumed for converting these power levels into field strength requirements.

Input Conditions	Output power, Pout
loh > CRS Ês +	≤ 10 dBm
$10 \cdot \log_{10} \left( N_{RB}^{DL} \cdot N_{sc}^{RB}  ight)$	
+ 30 dB	
and CRS Ês ≥ -127dBm	
loh ≤ CRS Ês +	≤ max(8 dBm, min(20 dBm,
$10 \cdot \log_{10} \left( N_{RB}^{DL} \cdot N_{sc}^{RB} \right)$	CRS Ês +
+ 30  dB	$10 \cdot \log_{10} \left( N_{RB}^{DL} \cdot N_{sc}^{RB} \right)$
and CRS Ês ≥ -127dBm	+ 85 dB))

#### Table 6.2.7-1: Home BS output power for adjacent operator E-UTRA channel protection

- NOTE 1: The Home BS transmitter output power specified in Table 6.2.7-1 assumes a Home BS reference antenna gain of 0 dBi, an target outage zone of 47dB around the Home BS for an UE on the adjacent channel, with an allowance of 2 dB for measurement errors, an ACIR of 30 dB, an adjacent channel UE £s/Iot target of -6 dB and the same CRS £s value at the adjacent channel UE as for the Home BS.
- NOTE 2: For CRS  $\hat{E}s < -127$  dBm, the requirements in subclause 6.2 apply.
- NOTE 3: The output power Pout is the sum transmit power across all the antenna connectors of the Home BS, with each transmit power measured at the respective antenna connectors.
- NOTE 4:  $N_{RB}^{DL}$  is the number of downlink resource blocks in the own Home BS channel.

NOTE 5:  $N_{sc}^{RB}$  is the number of subcarriers in a resource block,  $N_{sc}^{RB} = 12$ .

# 6.2.7.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.2.4.

# 6.2.7.3 Test purpose

The test purpose is to verify the capability of the Home BS to adjust the transmitter output power according to the input conditions, as specified in Table 6.2.7-1, across the frequency range and under normal and extreme conditions for all transmitters in the BS.

## 6.2.7.4 Method of test

#### 6.2.7.4.1 Initial conditions

Test environment: normal; see Annex D2.

RF channels to be tested for single carrier: M; see subclause 4.7.

In addition, on one EARFCN only, the test shall be performed under extreme power supply as defined in Annex D.5.

NOTE: Tests under extreme power supply also test extreme temperature.

Signal generators delivering co-channel and adjacent channel interferers are switched off.

- 1) Set-up the equipment as shown as shown in Annex I.1.4.
- 2) The Home BS is configured such that the adjacent channel is known to belong to another operator.

#### 6.2.7.4.2 Procedure

- 1) Connect the combined downlink interfering signals (referred to as point D in Figure I.1-4) to the dedicated measurement port (referred to as point 1 in Figure I.1-4) if available, otherwise connect to point 2.
- Configure the signal generator for co-channel interference to transmit AWGN over a bandwidth according to BW<sub>Config</sub> centred on RF channel M.
- 3) Configure the signal generator for adjacent channel DL signal to transmit a signal according to E-TM1.1 at the centre frequency equal to RF channel M + BW<sub>Channel</sub> MHz.
- 4) Switch on signal generators delivering co-channel and adjacent channel interferers, and adjust the ATT1 and ATT2 such that CRS  $\hat{E}s = -65 10 \cdot \log_{10} (N_{RB}^{DL} \cdot N_{sc}^{RB})$  dBm and Ioh = -50 dBm.
- 5) Trigger the Home BS power adjustment mechanism.
- 6) Configure the Home BS to transmit a signal according to E-TM1.1.

NOTE: The signal shall be transmitted with the maximum allowed output power.

- 7) Measure Home BS output power, Pout, and check it is below the required value according to the CRS Ês and Ioh values determined in step 4.
- 8) Repeat steps 3) to 7) with the frequency in step 3 set to RF channel M BW<sub>Channel</sub> MHz.
- Repeat steps 3) to 8) with different settings for ATT1 and ATT2 to arrive the CRS Ês and Ioh pairs as specified in Table 6.2.7-2.

Test Case	CRS Ês (dBm)	loh (dBm)
2	-75 - $10 \cdot \log_{10} \left( N_{RB}^{DL} \cdot N_{sc}^{RB} \right)$	-60
3	-90 - $10 \cdot \log_{10} \left( N_{RB}^{DL} \cdot N_{sc}^{RB} \right)$	-70
4	-90 - $10 \cdot \log_{10} \left( N_{RB}^{DL} \cdot N_{sc}^{RB} \right)$	-50

Table 6.2.7-2: CRS Ês and loh pairs

### 6.2.7.5 Test Requirements

In normal operating conditions, the output power, Pout, of the Home BS shall be equal to or less than:

the value specified in Table 6.2.7-1 plus 2.7 dB for carrier frequency f  $\leq$  3.0GHz.

the value specified in Table 6.2.6-1 plus 3.0 dB for carrier frequency 3.0GHz < f  $\leq$  4.2GHz.

In extreme operating conditions, the output power, Pout, of the Home BS shall be equal to or less than:

the value specified in Table 6.2.7-1 plus 3.2 dB for carrier frequency  $f \le 3.0$ GHz.

the value specified in Table 6.2.6-1 plus 3.5 dB for carrier frequency 3.0GHz < f  $\leq$  4.2GHz.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance are given in Annex G.

# 6.2.8 Home BS output power for co-channel E-UTRA protection

## 6.2.8.1 Definition and applicability

To minimize the co-channel DL interference to non-CSG macro UEs operating in close proximity while optimizing the CSG Home BS coverage, Home BS may adjust its output power according to the requirements set out in this clause. These requirements are only applicable to Home BS. The requirements in this clause are applicable for AWGN radio propagation conditions.

For Home BS that supports the requirements in this clause, the output power, Pout, of the Home BS shall be as specified in Table 6.2.8-1 under the following input conditions:

- CRS Ês, measured in dBm, is the Reference Signal Received Power per resource element present at the Home BS antenna connector received from the co-channel Wide Area BS. For CRS Ês determination, the cell-specific reference signal R0 according TS 36.211 [12] shall be used. If the Home BS can reliably detect that multiple TX antenna ports are used for transmission by the co-channel Wide Area Base Station, it may use the average in [W] of the CRS Ês on all detected TX antenna ports, including R0.
- Ioh, measured in dBm, is the total received DL power, including all interference but excluding the own Home BS signal, present at the Home BS antenna connector on the Home BS operating channel.
- Iob, measured in dBm, is the uplink received interference power, including thermal noise, within one physical resource block"s bandwidth of  $N_{sc}^{RB}$  resource elements as defined in TS 36.214, present at the Home BS antenna connector on the Home BS operating channel.

The input conditions defined for the requirements in this section are specified at the antenna connector of the Home BS. For Home BS receivers with diversity, the requirements apply to each antenna connector separately, with the other one(s) terminated or disabled. The requirements are otherwise unchanged. For Home BS(s) without measurement capability, a reference antenna with a gain of 0 dBi is assumed for converting these power levels into field strength requirements.

Input Conditions	Output power, Pout
loh (DL) > CRS Ês + 10log <sub>10</sub> ( $N_{RB}^{DL}$ $N_{sc}^{RB}$ ) + 30 dB	≤ 10 dBm
and	
Option 1: CRS Ês ≥ -127 dBm or	
Option 2: CRS Ês ≥ -127 dBm and lob > -103 dBm	
loh (DL) ≤ CRS Ês + 10log <sub>10</sub> ( $N_{RB}^{DL} N_{sc}^{RB}$ ) + 30 dB	≤ max (Pmin, min (Pmax, CRS Ês +
	$10\log_{10}(N_{RB}^{DL} N_{sc}^{RB}) + X))$
and	
Option 1: CRS Ês ≥ -127 dBm or	30 dB ≤ X ≤ 70 dB Pmin = - 10 dBm
Option 2. CRS Ês ≥ -127 dBm and lob > -103 dBm	

#### Table 6.2.8-1: Home BS output power for co-channel E-UTRA channel protection

- Note 1: Only the option supported by the Home BS shall be tested.
- Note 2: For CRS  $\hat{E}s < -127$ dBm, or Iob  $\leq -103$  dBm when Option 2 is supported, the requirements in sub-clauses 6.2.1 and 6.2.2 apply.
- Note 3: The output power Pout is the sum of transmits power across all the antennas of the Home BS, with each transmit power measured at the respective antenna connectors.
- Note 4:  $N_{RB}^{DL}$  is the number of downlink resource blocks in the own Home BS channel.
- Note 5:  $N_{sc}^{RB}$  is the number of subcarriers in a resource block,  $N_{sc}^{RB} = 12$ .
- Note 6: X is a network configurable parameter.
- Note 7: Pmin can be lower dependent on the Home BS total dynamic range.
- Note8: Other input conditions and output power to be applied for network scenarios other than co-channel E-UTRA macro channel protection shall not be precluded.

#### 6.2.8.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.2.5.

#### 6.2.8.3 Test purpose

The test purpose is to verify the capability of the Home BS to adjust the transmitter output power according to the input conditions, as specified in Table 6.2.8-1, across the frequency range and under normal and extreme conditions for all transmitters in the BS. For Home BS that supports the requirements in this clause, only the option in Table 6.2.8-1 supported by the Home BS shall be tested.

# 6.2.8.4 Method of test

#### 6.2.8.4.1 Initial conditions

Test environment: normal; see Annex D2.

RF channels to be tested for single carrier: M; see subclause 4.7.

In addition, on one EARFCN only, the test shall be performed under extreme power supply as defined in Annex D.5.

NOTE: Tests under extreme power supply also test extreme temperature.

Signal generator delivering co-channel interferers is switched off.

- 1) Set-up the equipment as shown in Annex I.1.5, base on the option supported by Home BS.
- 2) The co-channel interference should be configured containing at least signals from a neighbouring Marco BS. For option 2 of Table 6.2.8-1, additional signal generator needed to deliver the MUE UL signal.

#### 6.2.8.4.2 Procedure

- 1) Connect the downlink co-channel interfering signals (referred to as point D in Figure I.1-5) to the dedicated measurement port (referred to as point 1 in Figure I.1-5) if available, otherwise connect to point 2. Specifically for option 2 of Table 6.2.8-1, connect the UL interference to point 2 for UL receiving on the figure of I.1.5-b.
- Configure the signal generator for co-channel interference to transmit AWGN over a bandwidth according to BW<sub>Config</sub> centred on RF channel M.
- 3) Configure the X as 30 dB. Switch on signal generators delivering interferers, and adjust the ATT such that CRS  $\hat{E}s = -10 10\log_{10}(N_{RB}^{DL} N_{sc}^{RB})$  dBm and Ioh = -50 dBm.
- 4) Trigger the Home BS power adjustment mechanism.
- 5) Configure the Home BS to transmit a signal according to E-TM1.1.
- NOTE: The signal shall be transmitted with the maximum allowed output power.
- 6) Measure Home BS output power, Pout, and check it is below the required value according to the CRS Ês and Ioh values determined in step 4. The value of Pmin for testing is -10dBm.
- 7) Repeat steps 4) to 6) with different settings for ATT to arrive the input parameter pairs as specified in Table 6.2.8-2 or 6.2.8-3, basing the option of Table 6.2.8-1 supported by the Home BS.

Test Case	CRS Ês (dBm)	loh (dBm)
1	-20- 10log <sub>10</sub> ( $N_{ m RB}^{ m DL}$ $N_{ m sc}^{ m RB}$ )	-60
2	Pmin-30 -10log <sub>10</sub> ( $N_{\rm RB}^{ m DL}$ $N_{ m sc}^{ m RB}$ )	-70
3	-90 - 10log <sub>10</sub> ( $N_{\rm RB}^{\rm DL}$ $N_{\rm sc}^{\rm RB}$ )	-50

Table 6.2.8-2: CRS Es and loh pairs for option 1

Table 6.2.8-3: CRS Es, loh and lok	pairs for option 2
------------------------------------	--------------------

Test Case	CRS Ês (dBm)	loh (dBm)	lob (dBm)
1	-20 - 10log <sub>10</sub> ( $N_{\rm RB}^{\rm DL}$ $N_{\rm sc}^{\rm RB}$ )	-60	-98
2	Pmin-30 -10log <sub>10</sub> ( $N_{\rm RB}^{\rm DL}$ $N_{\rm sc}^{\rm RB}$ )	-70	-98
3	-90 - 10log <sub>10</sub> ( $N_{ m RB}^{ m DL}$ $N_{ m sc}^{ m RB}$ )	-50	-98

### 6.2.8.5 Test Requirements

In normal operating conditions, the output power, Pout, of the Home BS shall be equal to or less than the value specified in Table 6.2.8-1 plus 2.7 dB.

In extreme operating conditions, the output power, Pout, of the Home BS shall be equal to or less than the value specified in Table 6.2.8-1 plus 3.2 dB.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance are given in Annex G.

# 6.3 Output power dynamics

The requirements in subclause 6.3 apply during the transmitter ON period.

# 6.3.1 RE Power control dynamic range

# 6.3.1.1 Definition and applicability

The RE power control dynamic range is the difference between the power of an RE and the average RE power for a BS at maximum output power for a specified reference condition. Unwanted emissions (as specified in subclause 6.6) and Transmit modulation quality (as specified in subclause 6.5) shall be maintained within the whole power control dynamic range.

# 6.3.1.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.3.1.1.

## 6.3.1.3 Method of test

No specific test or test requirements are defined for RE Power control dynamic range. The Error Vector Magnitude test, as described in subclause 6.5.2 provides sufficient test coverage for this requirement.

# 6.3.2 Total power dynamic range

# 6.3.2.1 Definition and applicability

The total power dynamic range is the difference between the maximum and the minimum transmit power of an OFDM symbol for a specified reference condition.

NOTE: The upper limit of the dynamic range is the OFDM symbol power for a BS at maximum output power. The lower limit of the dynamic range is the OFDM symbol power for a BS when one resource block is transmitted. The OFDM symbol shall carry PDSCH and not contain RS, PBCH or synchronisation signals.

### 6.3.2.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.3.2.1.

# 6.3.2.3 Test purpose

The test purpose is to verify that the total power dynamic range is met as specified by the minimum requirement.

## 6.3.2.4 Method of test

#### 6.3.2.4.1 Initial conditions

Test environment: normal; see Annex D.2.

RF channels to be tested for single carrier: B, M and T; see subclause 4.7.

Connect the signal analyzer to the base station antenna connector as shown in Annex I.1.1.

#### 6.3.2.4.2 Procedure

1) Set-up BS transmission at maximum total power as specified by the supplier. Channel set-up shall be according to E-TM 3.1.

- 2) Measure the average OFDM symbol power as defined in Annex F.
- 3) Set the BS to transmit a signal according to E-TM 2.

4) Measure the average OFDM symbol power as defined in Annex F. The measured OFDM symbols shall not contain RS, PBCH or synchronisation signals.

In addition, for a multi-band capable BS, the following steps shall apply:

- 5) For multi-band capable BS and single band tests, repeat the steps above per involved band where single carrier test models shall apply with no carrier activated in the other band.
- 6) For multi-band capable BS with separate antenna connector, the antenna connector not being under test shall be terminated.

# 6.3.2.5 Test Requirement

The downlink (DL) total power dynamic range for each E-UTRA carrier shall be larger than or equal to the level in Table 6.3.2-1.

E-UTRA channel bandwidth (MHz)	Total power dynamic range (dB)
1.4	7.3
3	11.3
5	13.5
10	16.5
15	18.3
20	19.6

#### Table 6.3.2-1 E-UTRA BS total power dynamic range, paired spectrum

- NOTE 1: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test is defined in Annex G. The explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.
- NOTE2: Additional test requirements for the Error Vector Magnitude (EVM) at the lower limit of the dynamic range are defined in subclause 6.5.2

# 6.4 Transmit ON/OFF power

The requirements in section 6.4 are only applied for E-UTRA TDD BS.

# 6.4.1 Transmitter OFF power

## 6.4.1.1 Definition and applicability

Transmitter OFF power is defined as the mean power measured over 70 us filtered with a square filter of bandwidth equal to the transmission bandwidth configuration of the BS  $(BW_{Config})$  centred on the assigned channel frequency during the transmitter OFF period.

For BS supporting intra-band contiguous CA, the transmitter OFF power is defined as the mean power measured over 70 us filtered with a square filter of bandwidth equal to the Aggregated Channel Bandwidth  $BW_{Channel\_CA}$  centred on  $(F_{edge\_high}+F_{edge\_low})/2$  during the transmitter OFF period.

#### 6.4.1.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.4.1.1.

## 6.4.1.3 Test purpose

The purpose of this test is to verify the E-UTRA BS transmitter OFF power is within the limit of the minimum requirement.

## 6.4.1.4 Method of test

Requirement is tested together with transmitter transient period, as described in subclause 6.4.2.4.

6.4.1.4.1	Void

6.4.1.4.2 Void

# 6.4.1.5 Test requirement

The conformance testing of transmit OFF power is included in the conformance testing of transmitter transient period; therefore, see subclause 6.4.2.5 for test requirements.

# 6.4.2 Transmitter transient period

# 6.4.2.1 Definition and applicability

The transmitter transient period is the time period during which the transmitter is changing from the OFF period to the ON period or vice versa. The transmitter transient period is illustrated in Figure 6.4.2.1-1.

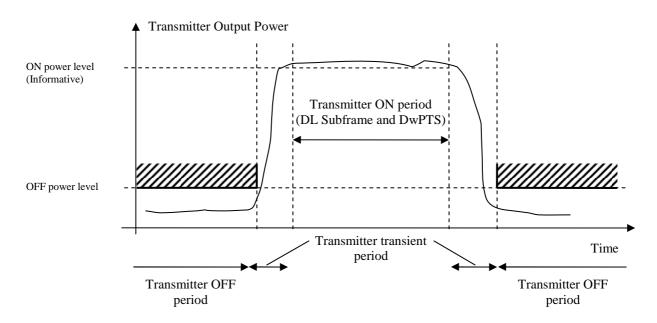


Figure 6.4.2.1-1 Illustration of the relations of transmitter ON period, transmitter OFF period and transmitter transient period.

## 6.4.2.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.4.2.1.

### 6.4.2.3 Test purpose

The purpose of this test is to verify the E-UTRA BS transmitter transient periods are within the limit of the minimum requirement.

## 6.4.2.4 Method of test

#### 6.4.2.4.1 Initial conditions

Test environment: normal; see Annex D.2.

RF channels to be tested for single carrier: M; see subclause 4.7.

RF bandwidth positions to be tested for multi-carrier and/or CA:  $M_{RFBW}$  in single-band operation, see subclause 4.7.1;  $B_{RFBW}$ -T"<sub>RFBW</sub> and B"<sub>RFBW</sub>-T<sub>RFBW</sub> in multi-band operation, see subclause 4.7.1.

Connect the signal analyzer to the BS antenna connector as shown in Annex I.1.1.

As a general rule, the resolution bandwidth of the measuring equipment should be equal to the measurement bandwidth. However, to improve measurement accuracy, sensitivity, efficiency and avoiding e.g. carrier leakage, the resolution bandwidth may be smaller than the measurement bandwidth. When the resolution bandwidth is smaller than the measurement bandwidth, the result should be integrated over the measurement bandwidth in order to obtain the equivalent noise bandwidth of the measurement bandwidth.

#### 6.4.2.4.2 Procedure

1) For a BS declared to be capable of single carrier operation only, set the BS to transmit a signal according to E-TM1.1 at manufacturer"s declared rated output power.

For a BS declared to be capable of multi-carrier and/or CA operation, set the BS to transmit according to E-TM1.1 on all carriers configured using the applicable test configuration and corresponding power setting specified in sub-clause 4.10 and 4.11.

- Measure the mean power spectral density over 70µs filtered with a square filter of bandwidth equal to the RF bandwidth of the BS centred on the central frequency of the RF bandwidth. 70µs average window centre is set from 35µs after end of one transmitter ON period + 17µs to 35µs before start of next transmitter ON period 17µs.
- 3) For BS supporting contiguous CA, measure the mean power spectral density over 70 $\mu$ s filtered with a square filter of bandwidth equal to the Aggregated Channel Bandwidth BW<sub>Channel\_CA</sub> centred on (F<sub>edge\_high</sub>+F<sub>edge\_low</sub>)/2. 70 $\mu$ s average window centre is set from 35 $\mu$ s after end of one transmitter ON period + 17 $\mu$ s to 35 $\mu$ s before start of next transmitter ON period 17 $\mu$ s.

In addition, for a multi-band capable BS, the following steps shall apply:

4) For multi-band capable BS with separate antenna connector, the antenna connector not being under test shall be terminated.

### 6.4.2.5 Test requirement

The measured mean power spectral density shall be less than -83dBm/MHz for carrier frequency  $f \le 3.0$ GHz.

The measured mean power spectral density shall be less than -82.5dBm/MHz for carrier frequency 3.0GHz < f  $\leq$  4.2GHz.

For BS capable of multi-band operation, the requirement is only applicable during the transmitter OFF period in all supported operating bands.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance are given in Annex G.

# 6.5 Transmitted signal quality

The requirements in subclause 6.5 apply to the transmitter ON period.

# 6.5.1 Frequency error

# 6.5.1.1 Definition and applicability

Frequency error is the measure of the difference between the actual BS transmit frequency and the assigned frequency. The same source shall be used for RF frequency and data clock generation.

It is not possible to verify by testing that the data clock is derived from the same frequency source as used for RF generation. This may be confirmed by the manufacturer"s declaration.

# 6.5.1.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.5.1.

## 6.5.1.3 Test purpose

To verify that the Frequency Error is within the limit of the minimum requirement.

## 6.5.1.4 Method of test

Requirement is tested together with Error Vector Magnitude test, as described in subclause 6.5.2.

### 6.5.1.5 Test requirement

The modulated carrier frequency of each E-UTRA carrier configured by the BS shall be accurate to within the accuracy range given in Table 6.5.1-1 observed over a period of one subframe (1ms).

BS class	Accuracy
Wide Area BS	± (0.05 ppm + 12 Hz)
Medium Range BS	± (0.1 ppm + 12 Hz)
Local Area BS	± (0.1 ppm + 12 Hz)
Home BS	± (0.25 ppm + 12 Hz)

Table 6.5.1-1: Frequency error test requirement

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance are given in Annex G.

# 6.5.2 Error Vector Magnitude

# 6.5.2.1 Definition and applicability

The Error Vector Magnitude is a measure of the difference between the ideal symbols and the measured symbols after the equalization. This difference is called the error vector. The equaliser parameters are estimated as defined in Annex F. The EVM result is defined as the square root of the ratio of the mean error vector power to the mean reference power expressed in percent.

### 6.5.2.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.5.2.

# 6.5.2.3 Test purpose

The test purpose is to verify that the Error Vector Magnitude is within the limit specified by the minimum requirement.

## 6.5.2.4 Method of test

#### 6.5.2.4.1 Initial conditions

Test environment: normal; see Annex D.2.

RF channels to be tested for single carrier: B, M and T; see subclause 4.7.

RF bandwidth positions to be tested for multi-carrier and/or CA:  $B_{RFBW}$ ,  $M_{RFBW}$  and  $T_{RFBW}$  in single-band operation, see subclause 4.7.1;  $B_{RFBW}$ -T"<sub>RFBW</sub> and B"<sub>RFBW</sub>-T<sub>RFBW</sub> in multi-band operation, see subclause 4.7.1.

Connect the signal analyzer to the base station antenna connector as shown in Annex I.1.1.

## 6.5.2.4.2 Procedure

 For a BS declared to be capable of single carrier operation only, set the BS to transmit a signal according to E-TM 3.1 at manufacturer"s declared rated output power.

For a BS declared to be capable of multi-carrier and/or CA operation, set the BS to transmit according to E-TM3.1 on all carriers configured using the applicable test configuration and corresponding power setting specified in sub-clause 4.10 and 4.11.

- 2) Measure the EVM and frequency error as defined in Annex F.
- 3) Repeat steps 2 and 3 for E-TM 3.2, E-TM 3.3 and E-TM 2. For E-TM2 the OFDM symbol power shall be at the lower limit of the dynamic range according to the test procedure in subclause 6.3.2.4.2 and test requirements in subclause 6.3.2.5.

In addition, for a multi-band capable BS, the following steps shall apply:

- 4) For multi-band capable BS and single band tests, repeat the steps above per involved band where single band test configurations and test models shall apply with no carrier activated in the other band.
- 5) For multi-band capable BS with separate antenna connector, the antenna connector not being under test in case of single-band or multi-band test shall be terminated.

#### 6.5.2.5 Test requirement

The EVM of each E-UTRA carrier for different modulation schemes on PDSCH shall be less than the limits in table 6.5.2.5-1:

Modulation scheme for PDSCH	Required EVM [%]
QPSK	18.5 %
16QAM	13.5 %
64QAM	9 %

#### Table 6.5.2.5-1 EVM requirements

The EVM requirement shall be applicable within a time period around the centre of the CP therefore the EVM requirement is tested against the maximum of the RMS average of 10 subframes at the two window W extremities.

Table 6.5.2.5-2 specifies EVM window length (W) for normal CP, the cyclic prefix length  $N_{cp}$  is 160 for symbols 0 and 144 for symbols 1-6.

Channel Bandwidth MHz	FFT size	Cyclic prefix length for symbols 0 in FFT samples	Cyclic prefix length for symbols 1-6 in FFT samples	EVM window length <i>W</i>	Ratio of <i>W</i> to total CP for symbols 1-6* [%]
1.4	128	10	9	5	55.6
3	256	20	18	12	66.7
5	512	40	36	32	88.9
10	1024	80	72	66	91.7
15	1536	120	108	102	94.4
20	2048	160	144	136	94.4
* Note: These percentages are informative and apply to symbols 1 through 6. Symbol 0 has a longer CP and therefore a lower percentage.					

#### Table 6.5.2.5-2 EVM window length for normal CP

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test is defined in Annex G. The explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

# 6.5.3 Time alignment error

## 6.5.3.1 Definition and applicability

Frames of the LTE signals present at the BS transmitter antenna port(s) are not perfectly aligned in time. In relation to each other, the RF signals present at the BS transmitter antenna port(s) experience certain timing differences.

For a specific set of signals/transmitter configuration/transmission mode, time alignment error (TAE) is defined as the largest timing difference between any two signals. This test is only applicable for eNode B supporting TX diversity MIMO transmission, carrier aggregation and their combinations.

#### 6.5.3.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.5.3.

# 6.5.3.3 Test Purpose

To verify that the timing alignment error in TX diversity, MIMO transmission, carrier aggregation and their combinations is within the limit specified by the minimum requirement.

# 6.5.3.4 Method of Test

#### 6.5.3.4.1 Initial Conditions

Test environment: normal; see Annex D.2.

RF channels to be tested for single carrier: M; see subclause 4.7.

RF bandwidth positions to be tested for multi-carrier and/or CA:  $M_{RFBW}$  in single-band operation, see subclause 4.7.1;  $B_{RFBW}$ -T"<sub>RFBW</sub> and B"<sub>RFBW</sub>-T<sub>RFBW</sub> in multi-band operation, see subclause 4.7.1.

1) Connect two base station RF antenna ports to the measurement equipment according to Annex I.1.3. If available terminate the other unused antenna ports.

#### 6.5.3.4.2 Procedure

1) Set the base station to transmit E-TM1.1 or any DL signal using TX diversity, MIMO transmission or carrier aggregation.

NOTE: For TX diversity and MIMO transmission, different ports may be configured in E-TM (using p = 0 and 1).

For a BS declared to be capable of single carrier operation only, set the BS to transmit according to manufacturer"s declared rated output power.

If the BS supports intra band contiguous or non-contiguous Carrier Aggregation set the base station to transmit using the applicable test configuration and corresponding power setting specified in sub-clause 4.10 and 4.11.

If the BS supports inter-band carrier aggregation set the base station to transmit, for each band, a single carrier or all carriers, using the applicable test configuration and corresponding power setting specified in sub clause 4.10 and 4.11.

- 2) Measure the time alignment error between the reference symbols on the carrier(s) from active antenna port(s).
- 3) Repeat the step 1 and 2 for any other possible configuration of transmit antennas.

In addition, for a multi-band capable BS, the following steps shall apply:

- 4) For multi-band capable BS and single band tests, repeat the steps above per involved band where single band test configurations and test models shall apply with no carrier activated in the other band.
- 5) For multi-band capable BS with separate antenna connector, the antenna connector not being under test in case of single-band or multi-band test shall be terminated.

## 6.5.3.5 Test Requirement

For MIMO or TX diversity transmissions, at each carrier frequency, TAE shall not exceed 90 ns.

For intra-band carrier aggregation, with or without MIMO or TX diversity, TAE shall not exceed 155 ns.

For intra-band non-contiguous carrier aggregation, with or without MIMO or TX diversity, TAE shall not exceed 285 ns.

For inter-band carrier aggregation, with or without MIMO or TX diversity, TAE shall not exceed 285 ns.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance are given in Annex G.

# 6.5.4 DL RS power

### 6.5.4.1 Definition and applicability

DL RS power is the resource element power of Downlink Reference Symbol.

The absolute DL RS power is indicated on the DL-SCH. The absolute accuracy is defined as the maximum deviation between the DL RS power indicated on the DL-SCH and the DL RS power of each E-UTRA carrier at the BS antenna connector.

### 6.5.4.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.5.4.

## 6.5.4.3 Test purpose

The test purpose is to verify that the DL RS power is within the limit specified by the minimum requirement.

### 6.5.4.4 Method of test

#### 6.5.4.4.1 Initial conditions

Test environment: normal; see Annex D.2.

RF channels to be tested for single carrier: B, M and T; see subclause 4.7.

Connect the signal analyzer to the base station antenna connector as shown in Annex I.1.1.

### 6.5.4.4.2 Procedure

Set-up BS transmission at manufacturer's declared rated output power. Channel set-up shall be according to E-TM 1.1.

Measure the RS transmitted power according to annex F.

In addition, for a multi-band capable BS, the following steps shall apply:

- For multi-band capable BS and single band tests, repeat the steps above per involved band where single carrier test models shall apply with no carrier activated in the other band.
- For multi-band capable BS with separate antenna connector, the antenna connector not being under test shall be terminated.

### 6.5.4.5 Test requirement

DL RS power of each E-UTRA carrier shall be:

within  $\pm$  2.9 dB of the DL RS power indicated on the DL-SCH for carrier frequency f  $\leq$  3.0GHz.

within  $\pm$  3.2 dB of the DL RS power indicated on the DL-SCH for carrier frequency 3.0GHz < f  $\leq$  4.2GHz.

- NOTE 1: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test is defined in Annex G. The explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.
- NOTE 2: PDSCH in E-TM1.1 is configured as "all 0" and DL RS power is not indicated on PDSCH during the measurement. The absolute DL RS power indicated on the DL-SCH can be calculated as  $Pmax, c 10log_{10}(12*N_{RB})$  dBm, where  $N_{RB}$  is the transmission bandwidth configuration of E-TM1.1.

# 6.6 Unwanted emissions

Unwanted emissions consist of out-of-band emissions and spurious emissions [5]. Out of band emissions are unwanted emissions immediately outside the channel bandwidth resulting from the modulation process and non-linearity in the transmitter but excluding spurious emissions. Spurious emissions are emissions which are caused by unwanted transmitter effects such as harmonics emission, parasitic emission, intermodulation products and frequency conversion products, but exclude out of band emissions.

The out-of-band emissions requirement for the BS transmitter is specified both in terms of Adjacent Channel Leakage power Ratio (ACLR) and Operating band unwanted emissions. The Operating band unwanted emissions define all unwanted emissions in each supported downlink operating band plus the frequency ranges 10 MHz above and 10 MHz below each band. Unwanted emissions outside of this frequency range are limited by a spurious emissions requirement.

For a BS supporting multi-carrier and/or CA, the unwanted emissions requirements apply to channel bandwidths of the outermost carrier larger than or equal to 5 MHz.

There is in addition a requirement for occupied bandwidth.

# 6.6.1 Occupied bandwidth

# 6.6.1.1 Definition and applicability

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage  $\beta/2$  of the total mean transmitted power.

The value of  $\beta/2$  shall be taken as 0.5%.

# 6.6.1.2 Minimum Requirements

The minimum requirement is in TS 36.104 [2] subclause 6.6.1.

# 6.6.1.3 Test purpose

The occupied bandwidth, defined in the Radio Regulations of the International Telecommunication Union ITU, is a useful concept for specifying the spectral properties of a given emission in the simplest possible manner; see also ITU-R Recommendation SM.328 [4]. The test purpose is to verify that the emission of the BS does not occupy an excessive bandwidth for the service to be provided and is, therefore, not likely to create interference to other users of the spectrum beyond undue limits.

# 6.6.1.4 Method of test

### 6.6.1.4.1 Initial conditions

Test environment: normal; see Annex D.2.

RF channels to be tested for single carrier: B, M and T; see subclause 4.7.

Aggregated channel bandwidth positions to be tested for contiguous carrier aggregation:  $B_{BW Channel CA}$ ,  $M_{BW Channel CA}$ ,  $M_{$ 

- 1) Connect the Measurement device to the BS antenna connector as shown in Annex I.1.1.
- 2) For a BS declared to be capable of single carrier operation, start transmission according to E-TM1.1 at manufacturer"s declared rated output power.

For a BS declared to be capable of contiguous carrier aggregation operation, set the base station to transmit according to E-TM1.1 on all carriers configured using the applicable test configuration and corresponding power setting specified in sub-clause 4.10 and 4.11.

### 6.6.1.4.2 Procedure

1) Measure the spectrum emission of the transmitted signal using at least the number of measurement points, and across a span, as listed in Table 6.6.1.4.2-1. The selected resolution bandwidth (RBW) filter of the analyser shall be 30 kHz or less.

Channel bandwidth BW <sub>Channel</sub> [MHz]	1.4	3	5	10	15	20	>20
Span [MHz]	10	10	10	20	30	40	$2 \times BW_{Channel\_CA}$
Minimum number of measurement points	1429	667	400	400	400	400	$\left[\frac{2 \times BW_{Channel\_CA}}{100 kHz}\right]$

 Table 6.6.1.4.2-1 Span and number of measurement points for OBW measurements

- NOTE: The detection mode of the spectrum analyzer will not have any effect on the result if the statistical properties of the out-of-OBW power are the same as those of the inside-OBW power. Both are expected to have the Rayleigh distribution of the amplitude of Gaussian noise. In any case where the statistics are not the same, though, the detection mode must be power responding. The analyser may be set to respond to the average of the power (root-mean-square of the voltage) across the measurement cell.
- 2) Compute the total of the power, P0, (in power units, not decibel units) of all the measurement cells in the measurement span. Compute P1, the power outside the occupied bandwidth on each side. P1 is half of the total power outside the bandwidth. P1 is half of (100 % (occupied percentage)) of P0. For the occupied percentage of 99 %, P1 is 0.005 times P0.
- 3) Determine the lowest frequency, f1, for which the sum of all power in the measurement cells from the beginning of the span to f1 exceeds P1.
- 4) Determine the highest frequency, f2, for which the sum of all power in the measurement cells from f2 to the end of the span exceeds P1.
- 5) Compute the occupied bandwidth as  $f_2 f_1$ .

In addition, for a multi-band capable BS, the following steps shall apply:

- 6) For multi-band capable BS and single band tests, repeat the steps above per involved band where single carrier test models shall apply, with no carrier activated in the other band. In addition, when contiguous CA is supported, single band test configurations and test models shall apply with no carrier activated in the other band.
- 7) For multi-band capable BS with separate antenna connector, the antenna connector not being under test shall be terminated.

#### 6.6.1.5 Test requirements

The occupied bandwidth for each E-UTRA carrier shall be less than the channel bandwidth as defined in Table 5.6-1. For contiguous CA, the occupied bandwidth shall be less than or equal to the Aggregated Channel Bandwidth as defined in subclause 5.6.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance are given in Annex G.

# 6.6.2 Adjacent Channel Leakage power Ratio (ACLR)

### 6.6.2.1 Definition and applicability

Adjacent Channel Leakage power Ratio (ACLR) is the ratio of the filtered mean power centred on the assigned channel frequency to the filtered mean power centred on an adjacent channel frequency.

The requirements shall apply outside the Base Station RF bandwidth or maximum radio bandwidth edges whatever the type of transmitter considered (single carrier, multi-carrier and/or CA). It applies for all transmission modes foreseen by the manufacturer's specification.

For a BS operating in non-contiguous spectrum, the ACLR also applies for the first adjacent channel inside any subblock gap with a gap size  $W_{gap} \ge 15$  MHz. The ACLR requirement for the second adjacent channel applies inside any sub-block gap with a gap size  $W_{gap} \ge 20$  MHz. The CACLR requirement in subclause 6.6.2.6 applies in sub block gaps for the frequency ranges defined in Table 6.6.2-5/6.

F or a BS operating in multiple bands, where multiple bands are mapped onto the same antenna connector, the ACLR also applies for the first adjacent channel inside any inter RF bandwidth gap with a gap size  $W_{gap} \ge 15$ MHz. The ACLR requirement for the second adjacent channel applies inside any inter RF bandwidth gap with a gap size  $W_{gap} \ge 20$  MHz. The CACLR requirement in subclause 6.6.2.6 applies in inter RF bandwidth gaps for the frequency ranges defined in Table 6.6.2-5/6.

The requirement applies during the transmitter ON period.

### 6.6.2.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.6.2.1

### 6.6.2.3 Test purpose

To verify that the adjacent channel leakage power ratio requirement shall be met as specified by the minimum requirement.

### 6.6.2.4 Method of test

#### 6.6.2.4.1 Initial conditions

Test environment: normal; see Annex D.2.

RF channels to be tested for single carrier: B, M and T; see subclause 4.7.

RF bandwidth positions to be tested for multi-carrier and/or CA:  $B_{RFBW}$ ,  $M_{RFBW}$  and  $T_{RFBW}$  in single-band operation see subclause 4.7.1;  $B_{RFBW}$ -T"<sub>RFBW</sub> and B"<sub>RFBW</sub>-T<sub>RFBW</sub> in multi-band operation, see subclause 4.7.1.

- 1) Connect measurement device to the base station antenna connector as shown in Annex I.1.1.
- 2) The measurement device characteristics shall be:
  - measurement filter bandwidth: defined in subclause 6.6.2.5;
  - detection mode: true RMS voltage or true average power.
- 3) For a BS declared to be capable of single carrier operation only, set the base station to transmit a signal according to E-TM1.1 at manufacturer"s declared rated output power.

For a BS declared to be capable of multi-carrier and/or CA operation, set the base station to transmit according to E-TM1.1 on all carriers configured using the applicable test configuration and corresponding power setting specified in sub-clause 4.10 and 4.11.

4) Set carrier frequency within the frequency band supported by BS.

#### 6.6.2.4.2 Procedure

- Measure Adjacent channel leakage power ratio for the frequency offsets both side of channel frequency as specified in Table 6.6.2-1 (Paired spectrum case) or Table 6.6.2-2 (Unpaired spectrum case) respectively. In multiple carrier case only offset frequencies below the lowest and above the highest carrier frequency used shall be measured.
- 2) For the ACLR requirement applied inside sub-block gap for non-contiguous spectrum operation or inside inter RF bandwidth gap for multi-band operation:
  - a) Measure ACLR inside sub-block gap or inter RF bandwidth gap as specified in subclause 6.6.2.5, if applicable.
  - b) Measure CACLR inside sub-block gap or inter RF bandwidth gap as specified in subclause 6.6.2.6, if applicable.
- 3) Repeat the test with the channel set-up according to E-TM1.2.

In addition, for a multi-band capable BS, the following steps shall apply:

- 4) For multi-band capable BS and single band tests, repeat the steps above per involved band where single band test configurations and test models shall apply with no carrier activated in the other band.
- 5) For multi-band capable BS with separate antenna connector, the antenna connector not being under test in case of single-band or multi-band test shall be terminated.

# 6.6.2.5 Test Requirement

The ACLR is defined with a square filter of bandwidth equal to the transmission bandwidth configuration of the transmitted signal ( $BW_{Config}$ ) centred on the assigned channel frequency and a filter centred on the adjacent channel frequency according to the tables below.

For Category A Wide Area BS, either the ACLR limits in the tables below or the absolute limit of -13 dBm/MHz apply, whichever is less stringent.

For Category B Wide Area BS, either the ACLR limits in the tables below or the absolute limit of -15 dBm/MHz apply, whichever is less stringent.

For Medium Range BS, either the ACLR limits in the tables below or the absolute limit of -25 dBm/MHz shall apply, whichever is less stringent.

For Local Area BS, either the ACLR limits in the tables below or the absolute limit of -32dBm/MHz shall apply, whichever is less stringent.

For Home BS, either the ACLR limits in the tables below or the absolute limit of -50dBm/MHz apply, whichever is less stringent.

For operation in paired spectrum, the ACLR shall be higher than the value specified in Table 6.6.2-1.

Channel bandwidth of E-UTRA lowest (highest) carrier transmitted BW <sub>Channel</sub> [MHz]	BS adjacent channel centre frequency offset below the lowest or above the highest carrier centre frequency transmitted	Assumed adjacent channel carrier (informative)	Filter on the adjacent channel frequency and corresponding filter bandwidth	ACLR limit	
1.4, 3.0, 5, 10, 15, 20	BW <sub>Channel</sub>	E-UTRA of same BW	Square (BW <sub>Config</sub> )	44.2 dB	
	2 x BW <sub>Channel</sub>	E-UTRA of same BW	Square (BW <sub>Config</sub> )	44.2 dB	
	BW <sub>Channel</sub> /2 + 2.5 MHz	3.84 Mcps UTRA	RRC (3.84 Mcps)	44.2	
				dB	
	BW <sub>Channel</sub> /2 + 7.5 MHz	3.84 Mcps UTRA	RRC (3.84 Mcps)	44.2	
				dB	
NOTE 1:       BW <sub>Channel</sub> and BW <sub>Config</sub> are the channel bandwidth and transmission bandwidth configuration of the E-UTRA lowest (highest) carrier transmitted on the assigned channel frequency.         NOTE 2:       The RRC filter shall be equivalent to the transmit pulse shape filter defined in [15], with a chip rate as defined in this table.					

Table 6.6.2-1: Base Station ACLR in paired spectrum

For operation in unpaired spectrum, the ACLR shall be higher than the value specified in Table 6.6.2-2.

Channel bandwidth of E-UTRA lowest (highest) carrier transmitted BW <sub>Channel</sub> [MHz]	BS adjacent channel centre frequency offset below the lowest or above the highest carrier centre frequency transmitted	Assumed adjacent channel carrier (informative)	Filter on the adjacent channel frequency and corresponding filter bandwidth	ACLR limit	
1.4, 3.0	BW <sub>Channel</sub>	E-UTRA of same BW	Square (BW <sub>Config</sub> )	44.2 dB	
,	2 x BW <sub>Channel</sub>	E-UTRA of same BW	Square (BW <sub>Config</sub> )	44.2 dB	
	BW <sub>Channel</sub> /2 + 0.8 MHz	1.28 Mcps UTRA	RRC (1.28 Mcps)	44.2 dB	
	BW <sub>Channel</sub> /2 + 2.4 MHz	1.28 Mcps UTRA	RRC (1.28 Mcps)	44.2 dB	
5, 10, 15, 20	BW <sub>Channel</sub>	E-UTRA of same BW	Square (BW <sub>Config</sub> )	44.2 dB	
	2 x BW <sub>Channel</sub>	E-UTRA of same BW	Square (BW <sub>Config</sub> )	44.2 dB	
	BW <sub>Channel</sub> /2 + 0.8 MHz	1.28 Mcps UTRA	RRC (1.28 Mcps)	44.2 dB	
	BW <sub>Channel</sub> /2 + 2.4 MHz	1.28 Mcps UTRA	RRC (1.28 Mcps)	44.2 dB	
	BW <sub>Channel</sub> /2 + 2.5 MHz	3.84 Mcps UTRA	RRC (3.84 Mcps)	44.2 dB	
	BW <sub>Channel</sub> /2 + 7.5 MHz	3.84 Mcps UTRA	RRC (3.84 Mcps)	44.2 dB	
	BW <sub>Channel</sub> /2 + 5 MHz	7.68 Mcps UTRA	RRC (7.68 Mcps)	44.2 dB	
	BW <sub>Channel</sub> /2 + 15 MHz	7.68 Mcps UTRA	RRC (7.68 Mcps)	44.2 dB	
<ul> <li>NOTE 1: BW<sub>Channel</sub> and BW<sub>Config</sub> are the channel bandwidth and transmission bandwidth configuration of the E-UTRA lowest (highest) carrier transmitted on the assigned channel frequency.</li> <li>NOTE 2: The RRC filter shall be equivalent to the transmit pulse shape filter defined in [15], with a chip rate as defined in this table.</li> </ul>					

 Table 6.6.2-2: Base Station ACLR in unpaired spectrum with synchronized operation

For operation in non-contiguous paired spectrum or multiple bands, the ACLR shall be higher than the value specified in Table 6.6.2-3.

Sub-block or inter RF bandwidth gap size (W <sub>gap</sub> ) where the limit applies	BS adjacent channel centre frequency offset below or above the sub-block edge or the RF bandwidth edge (inside the gap)	Assumed adjacent channel carrier (informative)	Filter on the adjacent channel frequency and corresponding filter bandwidth	ACLR limit
W <sub>gap</sub> ≥ 15 MHz	2.5 MHz	3.84 Mcps UTRA	RRC (3.84 Mcps)	44.2 dB
W <sub>gap</sub> ≥ 20 MHz	7.5 MHz	3.84 Mcps UTRA	RRC (3.84 Mcps)	44.2 dB
	C filter shall be equivalent e as defined in this table.	to the transmit pulse sh	ape filter defined in TS 25.104	[15], with a

For operation in non-contiguous unpaired spectrum or multiple bands, the ACLR shall be higher than the value specified in Table 6.6.2-4.

Table 6.6.2-4: Base Station ACLR in non-contiguous unpaired spectrum or multiple bands

Sub-block or inter RF bandwidth gap size (W <sub>gap</sub> ) where the limit applies	BS adjacent channel centre frequency offset below or above the sub-block edge or the RF bandwidth edge (inside the gap)	Assumed adjacent channel carrier (informative)	Filter on the adjacent channel frequency and corresponding filter bandwidth	ACLR limit
W <sub>gap</sub> ≥ 15 MHz	2.5 MHz	5MHz E-UTRA	Square (BW <sub>Config</sub> )	44.2 dB
W <sub>gap</sub> ≥ 20 MHz	7.5 MHz	5MHz E-UTRA	Square (BW <sub>Config</sub> )	44.2 dB

## 6.6.2.6 Cumulative ACLR test requirement in non-contiguous spectrum

The following test requirement applies for the sub-block or inter RF bandwidth gap sizes listed in Table 6.6.2-5,

- Inside a sub-block gap within an operating band for a BS operating in non-contiguous spectrum.- Inside an inter RF bandwidth gap for a BS operating in multiple bands, where multiple bands are mapped on the same antenna connector.

The Cumulative Adjacent Channel Leakage power Ratio (CACLR) in a sub-block gap or inter RF bandwidth gap is the ratio of:

- a) the sum of the filtered mean power centred on the assigned channel frequencies for the two carriers adjacent to each side of the sub-block gap or inter RF bandwidth gap, and
- b) the filtered mean power centred on a frequency channel adjacent to one of the respective sub-block edges or RF bandwidth edges.

The assumed filter for the adjacent channel frequency is defined in Table 6.6.2-5/6. Filters on the assigned channels are defined in Table 6.6.2-7.

For Wide Area Category A BS, either the CACLR limits in Table 6.6.2-5/6 or the absolute limit of -13dBm/MHz apply, whichever is less stringent.

For Wide Area Category B BS, either the CACLR limits in Table 6.6.2-5/6 or the absolute limit of -15dBm/MHz apply, whichever is less stringent.

For Medium Range BS, either the CACLR limits in Table 6.6.2-5/6 or the absolute limit of -25 dBm/MHz shall apply, whichever is less stringent.

For Local Area BS, either the CACLR limits in Table 6.6.2-5/6 or the absolute limit of -32 dBm/MHz shall apply, whichever is less stringent.

For operation in non-contiguous spectrum or multiple bands, the CACLR for E-UTRA carriers located on either side of the sub-block gap or inter RF bandwidth gap shall be higher than the value specified in Table 6.6.2-5/6.

Sub-block or inter RF bandwidth gap size (W <sub>gap</sub> ) where the limit applies	BS adjacent channel centre frequency offset below or above the sub-block edge or the RF bandwidth edge (inside the gap)	Assumed adjacent channel carrier (informative)	Filter on the adjacent channel frequency and corresponding filter bandwidth	CACLR limit	
5 MHz ≤ W <sub>gap</sub> < 15 MHz	2.5 MHz	3.84 Mcps UTRA	RRC (3.84 Mcps)	44.2 dB	
10 MHz < W <sub>gap</sub> < 20 MHz	7.5 MHz	3.84 Mcps UTRA	RRC (3.84 Mcps)	44.2 dB	

Sub-block or inter RF bandwidth gap size (W <sub>gap</sub> ) where the limit applies	BS adjacent channel centre frequency offset below or above the sub-block edge or the RF bandwidth edge (inside the gap)	Assumed adjacent channel carrier (informative)	Filter on the adjacent channel frequency and corresponding filter bandwidth	CACLR limit
5 MHz ≤ W <sub>gap</sub> < 15 MHz	2.5 MHz	5MHz E-UTRA carrier	Square (BW <sub>Config</sub> )	44.2 dB
10 MHz < W <sub>gap</sub> < 20 MHz	7.5 MHz	5MHz E-UTRA carrier	Square (BW <sub>Config</sub> )	44.2 dB

Table 6.6.2-6: Base Station CACLR in non-contiguous unpaired spectrum or multiple bands

#### Table 6.6.2-7: Filter parameters for the assigned channel

RAT of the carrier adjacent to the sub-block or inter RF bandwidth gap	Filter on the assigned channel frequency and corresponding filter bandwidth
E-UTRA	E-UTRA of same BW

NOTE: If the above Test Requirements differ from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance are given in Annex G.

# 6.6.3 Operating band unwanted emissions

## 6.6.3.1 Definition and applicability

Unless otherwise stated, the Operating band unwanted emission limits are defined from 10 MHz below the lowest frequency of each supported downlink operating band up to 10 MHz above the highest frequency of each supported downlink operating band (see Table 5.5-1).

The requirements shall apply whatever the type of transmitter considered (single carrier, multi-carrier and/or CA) and for all transmission modes foreseen by the manufacturer's specification. In addition, for a BS operating in non-contiguous spectrum, the requirements apply inside any sub-block gap.

For BS capable of multi-band operation where multiple bands are mapped on separate antenna connectors, the singleband requirements apply and the cumulative evaluation of the emission limit in the inter RF bandwidth gap are not applicable.

The unwanted emission limits in the part of the downlink operating band that falls in the spurious domain are consistent with ITU-R Recommendation SM.329 [5].

For a multi-carrier E-UTRA BS or BS configured for intra-band contiguous or non-contiguous carrier aggregation the definitions above apply to the lower edge of the carrier transmitted at the lowest carrier frequency and the upper edge of the carrier transmitted at the highest carrier frequency within a specified operating band.

For Wide Area BS, the requirements of either subclause 6.6.3.5.1 (Category A limits) or subclause 6.6.3.5.2 (Category B limits) shall apply.

For Local Area BS, the requirements of subclause 6.6.3.5.2A shall apply (Category A and B).

For Home BS, the requirements of subclause 6.6.3.5.2B shall apply (Category A and B).

For Medium Range BS, the requirements in subclause 6.6.3.5.2C shall apply (Category A and B).

The application of either Category A or Category B limits shall be the same as for Transmitter spurious emissions (Mandatory Requirements) in subclause 6.6.4.5.

For Category B Operating band unwanted emissions, there are two options for the limits that may be applied regionally. Either the limits in subclause 6.6.3.5.2.1 or subclause 6.6.3.5.2.2 shall be applied.

### 6.6.3.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.6.3.

#### 6.6.3.3 Test purpose

This test measures the emissions of the BS, close to the assigned channel bandwidth of the wanted signal, while the transmitter is in operation.

# 6.6.3.4 Method of test

#### 6.6.3.4.1 Initial conditions

Test environment: normal; see Annex D.2.

RF channels to be tested for single carrier: B, M and T; see subclause 4.7.

RF bandwidth positions to be tested for multi-carrier and/or CA:  $B_{RFBW}$ ,  $M_{RFBW}$  and  $T_{RFBW}$  in single-band operation, see subclause 4.7.1;  $B_{RFBW}$ -T"<sub>RFBW</sub> and B"<sub>RFBW</sub>-T<sub>RFBW</sub> in multi-band operation, see subclause 4.7.1.

1) Connect the signal analyzer to the base station antenna connector as shown in Annex I.1.1.

As a general rule, the resolution bandwidth of the measuring equipment should be equal to the measurement bandwidth. However, to improve measurement accuracy, sensitivity, efficiency and avoiding e.g. carrier leakage, the resolution bandwidth may be smaller than the measurement bandwidth. When the resolution bandwidth is smaller than the measurement bandwidth, the result should be integrated over the measurement bandwidth in order to obtain the equivalent noise bandwidth of the measurement bandwidth.

2) Detection mode: True RMS.

#### 6.6.3.4.2 Procedure

1) For a BS declared to be capable of single carrier operation only, set the BS transmission at manufacturer"s declared rated output power. Channel set-up shall be according to E-TM 1.1.

For a BS declared to be capable of multi-carrier and/or CA operation, set the base station to transmit according to E-TM1.1 on all carriers configured using the applicable test configuration and corresponding power setting specified in sub-clause 4.10 and 4.11.

- 2) Step the centre frequency of the measurement filter in contiguous steps and measure the emission within the specified frequency ranges with the specified measurement bandwidth.
- 3) Repeat the test with the channel set-up according to E-TM 1.2

In addition, for a multi-band capable BS, the following steps shall apply:

- 4) For multi-band capable BS and single band tests, repeat the steps above per involved band where single band test configurations and test models shall apply with no carrier activated in the other band.
- 5) For multi-band capable BS with separate antenna connector, the antenna connector not being under test in case of single-band or multi-band test shall be terminated.

#### 6.6.3.5 Test requirement

The measurement results in step 2 of 6.6.3.4.2 shall not exceed the maximum levels specified in the tables below, where:

- $\Delta f$  is the separation between the channel edge frequency and the nominal -3dB point of the measuring filter closest to the carrier frequency.
- f\_offset is the separation between the channel edge frequency and the centre of the measuring filter.
- f\_offset<sub>max</sub> is the offset to the frequency 10 MHz outside the downlink operating band.
- $\Delta f_{max}$  is equal to f\_offset<sub>max</sub> minus half of the bandwidth of the measuring filter.

For BS operating in multiple bands, inside any inter RF bandwidth gaps with  $W_{gap} < 20$  MHz, emissions shall not exceed the cumulative sum of the test requirements specified at the RF bandwidth edges on each side of the inter RF bandwidth gap. The test requirement for RF bandwidth edge is specified in Tables 6.6.3.5.1-1 to 6.6.3.5.3-3 below, where in this case:

- $\Delta f$  is the separation between the RF bandwidth edge frequency and the nominal -3 dB point of the measuring filter closest to the RF bandwidth edge.
- f\_offset is the separation between the RF bandwidth edge frequency and the centre of the measuring filter.
- f\_offset<sub>max</sub> is equal to the inter RF bandwidth gap divided by two.
- $\Delta f_{max}$  is equal to f\_offset<sub>max</sub> minus half of the bandwidth of the measuring filter.

In addition inside any sub-block gap for a BS operating in non-contiguous spectrum, measurement results shall not exceed the cumulative sum of the test requirements specified for the adjacent sub blocks on each side of the sub block gap. The test requirement for each sub block is specified in Tables 6.6.3.5.1-1 to 6.6.3.5.3-3 below, where in this case:

- $\Delta f$  is the separation between the sub block edge frequency and the nominal -3 dB point of the measuring filter closest to the sub block edge.
- f\_offset is the separation between the sub block edge frequency and the centre of the measuring filter.
- f\_offset<sub>max</sub> is equal to the sub block gap bandwidth divided by two.
- $\Delta f_{max}$  is equal to f\_offset<sub>max</sub> minus half of the bandwidth of the measuring filter.

## 6.6.3.5.1 Test requirements for Wide Area BS (Category A)

For E-UTRA BS operating in Bands 5, 6, 8, 12, 13, 14, 17, 18, 19, 26, 27, 28, 29, 44 emissions shall not exceed the maximum levels specified in Tables 6.6.3.5.1-1 to 6.6.3.5.1-3.

# Table 6.6.3.5.1-1: Wide Area BS operating band unwanted emission limits for 1.4 MHz channelbandwidth (E-UTRA bands <1GHz) for Category A</td>

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)		
0 MHz ≤ ∆f < 1.4 MHz	$0.05 \text{ MHz} \le f_{offset} < 1.45 \text{ MHz}$	$+0.5dBm - \frac{10}{1.4} \cdot \left(\frac{f \_offset}{MHz} - 0.05\right) dB$	100 kHz		
$1.4 \text{ MHz} \le \Delta f < 2.8 \text{ MHz}$	$1.45 \text{ MHz} \le f_{offset} < 2.85 \text{ MHz}$	-9.5 dBm	100 kHz		
$2.8 \text{ MHz} \le \Delta f \le \Delta f_{max}$	2.85 MHz $\leq$ f_offset < f_offset <sub>max</sub>	-13 dBm	100 kHz		
NOTE 1: For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is Δf ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -13dBm/100kHz.					

NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap < 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.

# Table 6.6.3.5.1-2: Wide Area BS operating band unwanted emission limits for 3 MHz channel bandwidth (E-UTRA bands <1GHz) for Category A</th>

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 3 MHz	0.05 MHz $\leq$ f_offset < 3.05 MHz	$-3.5dBm - \frac{10}{3} \cdot \left(\frac{f \_offset}{MHz} - 0.05\right) dB$	100 kHz
$3 \text{ MHz} \le \Delta f < 6 \text{ MHz}$	$3.05 \text{ MHz} \le f_\text{offset} < 6.05 \text{ MHz}$	-13.5 dBm	100 kHz
$6 \text{ MHz} \le \Delta f \le \Delta f \text{max}$	6.05 MHz ≤ f_offset < f_offsetmax	-13 dBm	100 kHz
NOTE 1: For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is ∆f ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -13dBm/100kHz.			
inter RF bandy		F bandwidth gap < 20MHz the test requirem ve sum of contributions from adjacent sub-b	

# Table 6.6.3.5.1-3: Wide Area BS operating band unwanted emission limits for 5, 10, 15 and 20 MHz channel bandwidth (E-UTRA bands <1GHz) for Category A

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 5 MHz	0.05 MHz ≤ f_offset < 5.05 MHz	$-5.5dBm - \frac{7}{5} \cdot \left(\frac{f \_ offset}{MHz} - 0.05\right) dB$	100 kHz
5 MHz $\leq \Delta f < min(10 MHz, \Delta f_{max})$	5.05 MHz $\leq$ f_offset < min(10.05 MHz, f_offset <sub>max</sub> )	-12.5 dBm	100 kHz
10 MHz $\leq \Delta f \leq \Delta f_{max}$	$10.05 \text{ MHz} \le f_\text{offset} < f_\text{offset}_{max}$	-13 dBm (Note 6)	100 kHz
10 MHz ≤ Δf ≤ Δf <sub>max</sub> 10.05 MHz ≤ f_offset < f_offset, and the field of the sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub-block gap. Exception is Δf ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -13dBm/100kHz.		each side of the block gap, ent within the	

For E-UTRA BS operating in Bands 1, 2, 3, 4, 7, 9, 10, 11, 21, 23, 24, 25, 33, 34, 35, 36, 37, 38, 39, 40, 41, emissions shall not exceed the maximum levels specified in Tables 6.6.3.5.1-4, 6.6.3.5.1-5 and 6.6.3.5.1-6:

For E-UTRA BS operating in Bands 22, 42, 43, emissions shall not exceed the maximum levels specified in Tables 6.6.3.5.1-4a, 6.6.3.5.1-5a and 6.6.3.5.1-6a:

# Table 6.6.3.5.1-4: Wide Area BS operating band unwanted emission limits for 1.4 MHz channel bandwidth (1GHz < E-UTRA bands ≤ 3GHz) for Category A

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 1.4 MHz	0.05 MHz $\leq$ f_offset < 1.45 MHz	$+0.5dBm - \frac{10}{1.4} \cdot \left(\frac{f \_offset}{MHz} - 0.05\right) dB$	100 kHz
1.4 MHz ≤ ∆f < 2.8 MHz	1.45 MHz ≤ f_offset < 2.85 MHz	-9.5 dBm	100 kHz
$2.8 \text{ MHz} \le \Delta f \le \Delta f_{max}$	3.3 MHz $\leq$ f_offset < f_offset <sub>max</sub>	-13 dBm	1MHz
NOTE 1: For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is ∆f ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -13dBm/1MHz.			each side of the
NOTE 2: For BS suppor inter RF bandw	ting multi-band operation with inter RI	F bandwidth gap < 20MHz the test requirem ve sum of contributions from adjacent sub-b	

# Table 6.6.3.5.1-4a: Wide Area BS operating band unwanted emission limits for 1.4 MHz channel bandwidth (E-UTRA bands >3GHz) for Category A

Measurement bandwidth (Note 3)			
100 kHz			
100 kHz			
1MHz			
$2.8 \text{ MHz} \le \Delta f \le \Delta f_{max}$ $3.3 \text{ MHz} \le f_{o} \text{offset} < f_{o} \text{offset}_{max}$ $-13 \text{ dBm}$ $1\text{MHz}$ NOTE 1:For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is $\Delta f \ge 10$ MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -13dBm/1MHz.NOTE 2:For BS supporting multi-band operation with inter RF bandwidth gap < 20MHz the test requirement within the			

NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap < 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.

# Table 6.6.3.5.1-5: Wide Area BS operating band unwanted emission limits for 3 MHz channel bandwidth (1GHz < E-UTRA bands ≤ 3GHz) for Category A

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
$0 \text{ MHz} \le \Delta f < 3 \text{ MHz}$	0.05 MHz $\leq$ f_offset < 3.05 MHz	$-3.5dBm - \frac{10}{3} \cdot \left(\frac{f \_offset}{MHz} - 0.05\right) dB$	100 kHz
$3 \text{ MHz} \le \Delta f < 6 \text{ MHz}$	$3.05 \text{ MHz} \le f_\text{offset} < 6.05 \text{ MHz}$	-13.5 dBm	100 kHz
$6 \text{ MHz} \le \Delta f \le \Delta f_{max}$	$6.5 \text{ MHz} \leq f_{offset} < f_{offset_{max}}$	-13 dBm	1MHz
NOTE 1:       For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is Δf ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -13dBm/1MHz.         NOTE 2:       For BS supporting multi-band operation with inter RF bandwidth gap < 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each			each side of the block gap, ent within the
side of the inte	er RF bandwidth gap.		

# Table 6.6.3.5.1-5a: Wide Area BS operating band unwanted emission limits for 3 MHz channel bandwidth (E-UTRA bands >3GHz) for Category A

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
0 MHz ≤ $\Delta f$ < 3 MHz	0.05 MHz $\leq$ f_offset < 3.05 MHz	$-3.2dBm - \frac{10}{3} \cdot \left(\frac{f \_offset}{MHz} - 0.05\right) dB$	100 kHz
3 MHz ≤ ∆f < 6 MHz	3.05 MHz ≤ f_offset < 6.05 MHz	-13.2 dBm	100 kHz
$6 \text{ MHz} \leq \Delta f \leq \Delta f_{max}$	$6.5 \text{ MHz} \le f_{offset} < f_{offset}_{max}$	-13 dBm	1MHz
sub-block gap	s is calculated as a cumulative sum of	ation within any operating band the test req contributions from adjacent sub blocks on djacent sub blocks on each side of the sub-	each side of the

where the test requirement within sub-block gaps shall be -13dBm/1MHz.

NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap < 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.

# Table 6.6.3.5.1-6: Wide Area BS operating band unwanted emission limits for 5, 10, 15 and 20 MHz channel bandwidth (1GHz < E-UTRA bands ≤ 3GHz) for Category A

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 5 MHz	0.05 MHz $\leq$ f_offset < 5.05 MHz	$-5.5dBm - \frac{7}{5} \cdot \left(\frac{f \_offset}{MHz} - 0.05\right) dB$	100 kHz
5 MHz $\leq \Delta f < min(10 MHz, \Delta f_{max})$	$5.05 \text{ MHz} \le f_\text{offset} < min(10.05 \text{ MHz}, f_\text{offset}_max)$	-12.5 dBm	100 kHz
10 MHz $\leq \Delta f \leq \Delta f_{max}$	$10.5 \text{ MHz} \leq f_\text{offset} < f_\text{offset}_{max}$	-13 dBm (Note 6)	1MHz
sub-block gap sub block gap where the test NOTE 2: For BS suppor inter RF band	10 MHz ≤ Δf ≤ Δf <sub>max</sub> 10.5 MHz ≤ f_offset < f_offset < f_offset_max       -13 dBm (Note 6)       1MHz         NOTE 1:       For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is Δf ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -13dBm/1MHz.         NOTE 2:       For BS supporting multi-band operation with inter RF bandwidth gap < 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.		

# Table 6.6.3.5.1-6a: Wide Area BS operating band unwanted emission limits for 5, 10, 15 and 20 MHz channel bandwidth (E-UTRA bands >3GHz) for Category A

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 5 MHz	0.05 MHz ≤ f_offset < 5.05 MHz	$-5.2dBm - \frac{7}{5} \cdot \left(\frac{f \_ offset}{MHz} - 0.05\right) dB$	100 kHz
5 MHz $\leq \Delta f < min(10 MHz, \Delta f_{max})$	$5.05 \text{ MHz} \le f_\text{offset} < min(10.05 \text{ MHz}, f_\text{offset}_max)$	-12.2 dBm	100 kHz
10 MHz $\leq \Delta f \leq \Delta f_{max}$	10.5 MHz ≤ f_offset < f_offset <sub>max</sub>	-13 dBm (Note 6)	1MHz
sub-block gap sub block gap where the test NOTE 2: For BS suppor inter RF band	10 MHz ≤ Δf ≤ Δf <sub>max</sub> 10.5 MHz ≤ f_offset < f_offset < f_offset_max       -13 dBm (Note 6)       1MHz         NOTE 1:       For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is Δf ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -13dBm/1MHz.         NOTE 2:       For BS supporting multi-band operation with inter RF bandwidth gap < 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.		

# 6.6.3.5.2 Test requirements for Wide Area BS (Category B)

For Category B Operating band unwanted emissions, there are two options for the limits that may be applied regionally. Either the limits in subclause 6.6.3.5.2.1 or subclause 6.6.3.5.2.2 shall be applied.

## 6.6.3.5.2.1 Category B test requirements (Option 1)

For E-UTRA BS operating in Bands 5, 8, 12, 13, 14, 17, 20, 26, 27, 28, 29, 44 emissions shall not exceed the maximum levels specified in Tables 6.6.3.5.2.1-1 to 6.6.3.5.2.1-3:

# Table 6.6.3.5.2.1-1: Wide Area BS operating band unwanted emission limits for 1.4 MHz channel bandwidth (E-UTRA bands <1GHz) for Category B</th>

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)	
0 MHz ≤ $\Delta$ f < 1.4 MHz	0.05 MHz $\leq$ f_offset < 1.45 MHz	$+0.5dBm - \frac{10}{1.4} \cdot \left(\frac{f \_offset}{MHz} - 0.05\right) dB$	100 kHz	
1.4 MHz ≤ ∆f < 2.8 MHz	1.45 MHz ≤ f_offset < 2.85 MHz	-9.5 dBm	100 kHz	
$2.8 \text{ MHz} \le \Delta f \le \Delta f_{max}$	2.85 MHz $\leq$ f_offset < f_offset <sub>max</sub>	-16 dBm	100 kHz	
	NOTE 1: For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the			
	Exception is $\Delta f \ge 10$ MHz from both a requirement within sub-block gaps sh	djacent sub blocks on each side of the sub- all be -16dBm/100kHz.	block gap,	
		F bandwidth gap < 20MHz the test requirem		
	vidth gaps is calculated as a cumulativ r RF bandwidth gap.	ve sum of contributions from adjacent sub-b	locks on each	

# Table 6.6.3.5.2.1-2: Wide Area BS operating band unwanted emission limits for 3 MHz channel bandwidth (E-UTRA bands <1GHz) for Category B</th>

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
$0 \text{ MHz} \le \Delta f < 3 \text{ MHz}$	0.05 MHz $\leq$ f_offset < 3.05 MHz	$-3.5dBm - \frac{10}{3} \cdot \left(\frac{f\_offset}{MHz} - 0.05\right) dB$	100 kHz
$3 \text{ MHz} \le \Delta f < 6 \text{ MHz}$	$3.05 \text{ MHz} \le f_{\text{offset}} < 6.05 \text{ MHz}$	-13.5 dBm	100 kHz
$6 \text{ MHz} \leq \Delta f \leq \Delta f_{max}$	$6.05 \text{ MHz} \le f_\text{offset} < f_\text{offset}_{max}$	-16 dBm	100 kHz
NOTE 1: For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is Δf ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -16dBm/100kHz.			each side of the
inter RF band		F bandwidth gap < 20MHz the test requirem ve sum of contributions from adjacent sub-b	

# Table 6.6.3.5.2.1-3: Wide Area BS operating band unwanted emission limits for 5, 10, 15 and 20 MHz channel bandwidth (E-UTRA bands <1GHz) for Category B

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 5 MHz	0.05 MHz $\leq$ f_offset < 5.05 MHz	$-5.5dBm - \frac{7}{5} \cdot \left(\frac{f \_ offset}{MHz} - 0.05\right) dB$	100 kHz
5 MHz ≤ Δf <	5.05 MHz $\leq$ f_offset <	-12.5 dBm	100 kHz
min(10 MHz, $\Delta f_{max}$ )	min(10.05 MHz, f_offset <sub>max</sub> )		
10 MHz $\leq \Delta f \leq \Delta f_{max}$	10.05 MHz ≤ f_offset < f_offset <sub>max</sub>	-16 dBm (Note 6)	100 kHz
<ul> <li>NOTE 1: For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is ∆f ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -16dBm/100kHz.</li> <li>NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap &lt; 20MHz the test requirement within the</li> </ul>			
	width gaps is calculated as a cumulativer RF bandwidth gap.	ve sum of contributions from adjacent sub-b	locks on each

For E-UTRA BS operating in Bands 1, 2, 3, 4, 7, 10, 25, 33, 34, 35, 36, 37, 38, 39, 40, 41, emissions shall not exceed the maximum levels specified in Tables 6.6.3.5.2.1-4, 6.6.3.5.2.1-5 and 6.6.3.5.2.1-6:

For E-UTRA BS operating in Bands 22, 42, 43, emissions shall not exceed the maximum levels specified in Tables 6.6.3.5.2.1-4a, 6.6.3.5.2.1-5a and 6.6.3.5.2.1-6a:

# Table 6.6.3.5.2.1-4: Wide Area BS operating band unwanted emission limits for 1.4 MHz channel bandwidth (1GHz < E-UTRA bands ≤ 3GHz) for Category B

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 1.4 MHz	$0.05 \text{ MHz} \le f_{offset} < 1.45 \text{ MHz}$	$+0.5dBm - \frac{10}{1.4} \cdot \left(\frac{f \_offset}{MHz} - 0.05\right) dB$	100 kHz
$1.4 \text{ MHz} \le \Delta f < 2.8 \text{ MHz}$	1.45 MHz ≤ f_offset < 2.85 MHz	-9.5 dBm	100 kHz
2.8 MHz $\leq \Delta f \leq \Delta f_{max}$	3.3 MHz $\leq$ f_offset < f_offset <sub>max</sub>	-15 dBm	1MHz
sub-block gaps	is calculated as a cumulative sum of	ation within any operating band the test required for the test required for the test required for the sub- djacent sub blocks on each side of the sub-	each side of the

where the test requirement within sub-block gaps shall be -15dBm/1MHz. NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap < 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.

# Table 6.6.3.5.2.1-4a: Wide Area BS operating band unwanted emission limits for 1.4 MHz channel bandwidth (E-UTRA bands >3GHz) for Category B

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)	
0 MHz ≤ ∆f < 1.4 MHz	$0.05 \text{ MHz} \le f_{offset} < 1.45 \text{ MHz}$	$+0.8dBm - \frac{10}{1.4} \cdot \left(\frac{f \_offset}{MHz} - 0.05\right) dB$	100 kHz	
1.4 MHz ≤ ∆f < 2.8 MHz	1.45 MHz ≤ f_offset < 2.85 MHz	-9.2 dBm	100 kHz	
$2.8 \text{ MHz} \le \Delta f \le \Delta f_{max}$	3.3 MHz $\leq$ f_offset < f_offset <sub>max</sub>	-15 dBm	1MHz	
NOTE 1: For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is Δf ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -15dBm/1MHz.				
inter RF bandv	NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap < 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.			

# Table 6.6.3.5.2.1-5: Wide Area BS operating band unwanted emission limits for 3 MHz channel bandwidth (1GHz < E-UTRA bands ≤ 3GHz) for Category B

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
$0 \text{ MHz} \le \Delta f < 3 \text{ MHz}$	0.05 MHz ≤ f_offset < 3.05 MHz	$-3.5dBm - \frac{10}{3} \cdot \left(\frac{f \_ offset}{MHz} - 0.05\right) dB$	100 kHz
$3 \text{ MHz} \le \Delta f < 6 \text{ MHz}$	3.05 MHz ≤ f_offset < 6.05 MHz	-13.5 dBm	100 kHz
$6 \text{ MHz} \leq \Delta f \leq \Delta f_{max}$	$6.5 \text{ MHz} \le f_{offset} < f_{offset}_{max}$	-15 dBm	1MHz
sub-block gap	s is calculated as a cumulative sum of	ation within any operating band the test require contributions from adjacent sub blocks on	each side of the

sub block gap. Exception is  $\Delta f \ge 10$ MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -15dBm/1MHz.

NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap < 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.

# Table 6.6.3.5.2.1-5a: Wide Area BS operating band unwanted emission limits for 3 MHz channel bandwidth (E-UTRA bands >3GHz) for Category B

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 3 MHz	0.05 MHz $\leq$ f_offset < 3.05 MHz	$-3.2dBm - \frac{10}{3} \cdot \left(\frac{f \_offset}{MHz} - 0.05\right) dB$	100 kHz
$3 \text{ MHz} \le \Delta f < 6 \text{ MHz}$	3.05 MHz ≤ f_offset < 6.05 MHz	-13.2 dBm	100 kHz
$6 \text{ MHz} \leq \Delta f \leq \Delta f_{max}$	$6.5 \text{ MHz} \leq f_{offset} < f_{offset}_{max}$	-15 dBm	1MHz
<ul> <li>NOTE 1: For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is Δf ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -15dBm/1MHz.</li> <li>NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap &lt; 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.</li> </ul>			

# Table 6.6.3.5.2.1-6: Wide Area BS operating band unwanted emission limits for 5, 10, 15 and 20 MHz channel bandwidth (1GHz < E-UTRA bands ≤ 3GHz) for Category B

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 5 MHz	0.05 MHz ≤ f_offset < 5.05 MHz	$-5.5dBm - \frac{7}{5} \cdot \left(\frac{f \_ offset}{MHz} - 0.05\right) dB$	100 kHz
5 MHz ≤ Δf < min(10 MHz, Δf <sub>max</sub> )	5.05 MHz ≤ f_offset < min(10.05 MHz, f_offset <sub>max</sub> )	-12.5 dBm	100 kHz
10 MHz $\leq \Delta f \leq \Delta f_{max}$	$10.5 \text{ MHz} \le f_\text{offset} < f_\text{offset}_{max}$	-15 dBm (Note 6)	1MHz
NOTE 1:       For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is Δf ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -15dBm/1MHz.         NOTE 2:       For BS supporting multi-band operation with inter RF bandwidth gap < 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.			each side of the block gap, ent within the

# Table 6.6.3.5.2.1-6a: Wide Area BS operating band unwanted emission limits for 5, 10, 15 and 20 MHz channel bandwidth (E-UTRA bands >3GHz) for Category B

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 5 MHz	0.05 MHz $\leq$ f_offset < 5.05 MHz	$-5.2dBm - \frac{7}{5} \cdot \left(\frac{f \_ offset}{MHz} - 0.05\right) dB$	100 kHz
5 MHz ≤ ∆f <	5.05 MHz $\leq$ f_offset <	-12.2 dBm	100 kHz
min(10 MHz, ∆f <sub>max</sub> )	min(10.05 MHz, f_offset <sub>max</sub> )		
10 MHz $\leq \Delta f \leq \Delta fmax$	10.5 MHz $\leq$ f_offset < f_offsetmax	-15 dBm (Note 6)	1MHz
NOTE 1: For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is ∆f ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -15dBm/1MHz.			
inter RF bandy		F bandwidth gap < 20MHz the test requirem ve sum of contributions from adjacent sub-b	

# 6.6.3.5.2.2 Category B (Option 2)

The limits in this subclause are intended for Europe and may be applied regionally for BS operating in band 1, 3, 8, 33 or 34.

For a BS operating in band 1, 3, 8, 33 or 34, emissions shall not exceed the maximum levels specified in Table 6.6.3.5.2.2-1 below for 5, 10, 15 and 20 MHz channel bandwidth:

# Table 6.6.3.5.2.2-1: Regional Wide Area BS operating band unwanted emission limits in band 1, 3, 8,33 or 34 for 5, 10, 15 and 20 MHz channel bandwidth for Category B

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)	
$0 \text{ MHz} \le \Delta f < 0.2 \text{ MHz}$	$0.015MHz \le f_offset < 0.215MHz$	-12.5dBm	30 kHz	
0.2 MHz ≤ ∆f < 1 MHz	0.215MHz ≤ f_offset < 1.015MHz	$-12.5dBm - 15 \cdot \left(\frac{f \_ offset}{MHz} - 0.215\right) dB$	30 kHz	
(Note 5)	1.015MHz ≤ f_offset < 1.5 MHz	-24.5dBm	30 kHz	
1 MHz $\leq \Delta f \leq$ min( 10 MHz , $\Delta f_{max}$ )	1.5 MHz ≤ f_offset < min(10.5 MHz, f_offset <sub>max</sub> )	-11.5dBm	1 MHz	
10 MHz $\leq \Delta f \leq \Delta f_{max}$	10.5 MHz ≤ f_offset < f_offset <sub>max</sub>	-15 dBm (Note 6)	1 MHz	
NOTE 1: For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is ∆f ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -15dBm/1MHz.				
NOTE 2: For BS suppor	rting multi-band operation with inter RI	F bandwidth gap < 20MHz the test requirem	ent within the	

inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.

For a BS operating in band 1, 3, 8, 33 or 34, emissions shall not exceed the maximum levels specified in Table 6.6.3.5.2.2-2 below for 3 MHz channel bandwidth:

# Table 6.6.3.5.2.2-2: Regional Wide Area BS operating band unwanted emission limits in band 1, 3, 8,33 or 34 for 3 MHz channel bandwidth for Category B

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 0.05 MHz	0.015 MHz ≤ f_offset < 0.065 MHz	$6.5dBm - 60 \cdot \left(\frac{f_{offset}}{MHz} - 0.015\right) dB$	30 kHz
0.05 MHz ≤ ∆f < 0.15 MHz	0. 065 MHz ≤ f_offset < 0.165 MHz	$3.5dBm - 160 \cdot \left(\frac{f_{offset}}{MHz} - 0.065\right) dB$	30 kHz
$0.15 \text{ MHz} \le \Delta f < 0.2 \text{ MHz}$	0.165MHz ≤ f_offset < 0.215MHz	-12.5dBm	30 kHz
0.2 MHz ≤ ∆f < 1 MHz	0.215MHz ≤ f_offset < 1.015MHz	$-12.5 dBm - 15 \cdot \left(\frac{f - offset}{MHz} - 0.21\right)$	30 kHz
(Note 5)	1.015MHz ≤ f_offset < 1.5 MHz	-24.5dBm	30 kHz
$1 \text{ MHz} \le \Delta f \le 6 \text{ MHz}$	$1.5MHz \le f_{offset} < 6.5 MHz,$	-11.5dBm	1 MHz
$6 \text{ MHz} \leq \Delta f \leq \Delta f_{max}$	$6.5 \text{ MHz} \le f_\text{offset} < f_\text{offset}_{max}$	-15 dBm	1 MHz
sub-block gaps is sub block gap. Exc where the test req NOTE 2: For BS supporting	Ing non-contiguous spectrum operation with calculated as a cumulative sum of contrib ception is $\Delta f ≥ 10MHz$ from both adjacent uirement within sub-block gaps shall be - multi-band operation with inter RF bandw in gaps is calculated as a cumulative sum F bandwidth gap.	utions from adjacent sub blocks on e sub blocks on each side of the sub-l 15dBm/1MHz. vidth gap < 20MHz the test requirem	each side of the block gap, ent within the

For a BS operating in band 1, 3, 8, 33 or 34, emissions shall not exceed the maximum levels specified in Table 6.6.3.5.2.2-3 below for 1.4 MHz channel bandwidth:

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 0.05 MHz	0.015 MHz ≤ f_offset < 0.065 MHz	$6.5dBm - 60 \cdot \left(\frac{f_{offset}}{MHz} - 0.015\right) dB$	30 kHz
0.05 MHz ≤ ∆f < 0.15 MHz	0. 065 MHz ≤ f_offset < 0.165 MHz	$3.5dBm - 160 \cdot \left(\frac{f_{offset}}{MHz} - 0.065\right) dB$	30 kHz
$0.15 \text{ MHz} \le \Delta f < 0.2 \text{ MHz}$	0.165MHz ≤ f_offset < 0.215MHz	-12.5 dBm	30 kHz
0.2 MHz ≤ ∆f < 1 MHz	0.215MHz ≤ f_offset < 1.015MHz	$-12.5dBm - 15 \cdot \left(\frac{f - offset}{MHz} - 0.21\right)$	30 kHz
(Note 5)	1.015MHz ≤ f_offset < 1.5 MHz	-24.5 dBm	30 kHz
$1 \text{ MHz} \le \Delta f \le 2.8 \text{ MHz}$	$1.5 \text{ MHz} \le f_{offset} < 3.3 \text{ MHz}$	-11.5 dBm	1 MHz
2.8 MHz $\leq \Delta f \leq \Delta f_{max}$	3.3 MHz ≤ f_offset < f_offset <sub>max</sub>	-15 dBm	1 MHz

# Table 6.6.3.5.2.2-3: Regional Wide Area BS operating band unwanted emission limits in band 1, 3, 8,33 or 34for 1.4 MHz channel bandwidth for Category B

NOTE 1: For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is ∆f ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -15dBm/1MHz.

NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap < 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.

# 6.6.3.5.2A Test requirements for Local Area BS (Category A and B)

For Local Area BS in E-UTRA bands  $\leq$ 3GHz, emissions shall not exceed the maximum levels specified in Tables 6.6.3.5.2A-1, 6.6.3.5.2A-2 and 6.6.3.5.2A-3.

For Local Area BS in E-UTRA bands >3GHz, emissions shall not exceed the maximum levels specified in Tables 6.6.3.5.2A-1a, 6.6.3.5.2A-2a and 6.6.3.5.2A-3a.

# Table 6.6.3.5.2A-1: Local Area BS operating band unwanted emission limits for 1.4 MHz channel bandwidth (E-UTRA bands ≤3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 1.4 MHz	0.05 MHz ≤ f_offset < 1.45 MHz	$-19.5dBm - \frac{10}{1.4} \left(\frac{f \_ offset}{MHz} - 0.05\right) dB$	100 kHz
1.4 MHz ≤ ∆f < 2.8 MHz	1.45 MHz ≤ f_offset < 2.85 MHz	-29.5 dBm	100 kHz
2.8 MHz $\leq \Delta f \leq \Delta f_{max}$	2.85 MHz $\leq$ f_offset < f_offset <sub>max</sub>	-31 dBm	100 kHz
<ul> <li>NOTE 1: For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is ∆f ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -31 dBm/100 kHz.</li> <li>NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap &lt; 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.</li> </ul>			

# Table 6.6.3.5.2A-1a: Local Area BS operating band unwanted emission limits for 1.4 MHz channel bandwidth (E-UTRA bands >3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)	
0 MHz ≤ ∆f < 1.4 MHz	0.05 MHz $\leq$ f_offset < 1.45 MHz	$-19.2dBm - \frac{10}{1.4} \cdot \left(\frac{f \_ offset}{MHz} - 0.05\right) dB$	100 kHz	
1.4 MHz ≤ ∆f < 2.8 MHz	1.45 MHz ≤ f_offset < 2.85 MHz	-29.2 dBm	100 kHz	
$2.8 \text{ MHz} \le \Delta f \le \Delta f_{max}$	2.85 MHz $\leq$ f_offset < f_offset <sub>max</sub>	-31 dBm	100 kHz	
NOTE 1: For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is Δf ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap,				
	where the test requirement within sub-block gaps shall be -31 dBm/100 kHz.			
NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap < 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.				

# Table 6.6.3.5.2A-2: Local Area BS operating band unwanted emission limits for 3 MHz channel bandwidth (E-UTRA bands ≤3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 3 MHz	0.05 MHz ≤ f_offset < 3.05 MHz	$-23.5dBm - \frac{10}{3} \left( \frac{f \_ offset}{MHz} - 0.05 \right) dB$	100 kHz
$3 \text{ MHz} \le \Delta f < 6 \text{ MHz}$	3.05 MHz ≤ f_offset < 6.05 MHz	-33.5 dBm	100 kHz
$6 \text{ MHz} \leq \Delta f \leq \Delta f_{max}$	$6.05 \text{ MHz} \leq f_\text{offset} < f_\text{offset}_{max}$	-35 dBm	100 kHz
<ul> <li>NOTE 1: For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is Δf ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -35 dBm/100 kHz.</li> <li>NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap &lt; 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the sub-block gap.</li> </ul>			

## Table 6.6.3.5.2A-2a: Local Area BS operating band unwanted emission limits for 3 MHz channel bandwidth (E-UTRA bands >3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
$0 \text{ MHz} \le \Delta f < 3 \text{ MHz}$	0.05 MHz $\leq$ f_offset < 3.05 MHz	$-23.2dBm - \frac{10}{3} \cdot \left(\frac{f \_ offset}{MHz} - 0.05\right) dB$	100 kHz
3 MHz ≤ ∆f < 6 MHz	$3.05 \text{ MHz} \le f_{\text{offset}} < 6.05 \text{ MHz}$	-33.2 dBm	100 kHz
$6 \text{ MHz} \leq \Delta f \leq \Delta f_{max}$	$6.05 \text{ MHz} \le f_\text{offset} < f_\text{offset}_{max}$	-35 dBm	100 kHz
sub-block gap	s is calculated as a cumulative sum of	ation within any operating band the test requir contributions from adjacent sub blocks on djacent sub blocks on each side of the sub-	each side of the

where the test requirement within sub-block gaps shall be -35 dBm/100 kHz.

NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap < 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.

# Table 6.6.3.5.2A-3: Local Area BS operating band unwanted emission limits for 5, 10, 15 and 20 MHz channel bandwidth (E-UTRA bands ≤3GHz)

Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
0.05 MHz $\leq$ f_offset < 5.05 MHz	$-28.5dBm - \frac{7}{5} \left( \frac{f \_ offset}{MHz} - 0.05 \right) dB$	100 kHz
$5.05 \text{ MHz} \le f_\text{offset} < min(10.05 \text{ MHz}, f_\text{offset}_{max})$	-35.5 dBm	100 kHz
10.05 MHz $\leq$ f_offset < f_offset <sub>max</sub>	-37 dBm (Note 6)	100 kHz
10 MHz ≤ Δf ≤ Δf <sub>max</sub> 10.05 MHz ≤ f_offset < f_offset < f_offset_max		
	measurement filter centre frequency, f_offset $0.05 \text{ MHz} \leq f_offset < 5.05 \text{ MHz}$ $5.05 \text{ MHz} \leq f_offset < 5.05 \text{ MHz}$ $5.05 \text{ MHz} \leq f_offset < f_offset_{max}$ $10.05 \text{ MHz} \leq f_offset < f_offset_{max}$ orting non-contiguous spectrum operasis calculated as a cumulative sum of Exception is $\Delta f \geq 10 \text{ MHz}$ from both a requirement within sub-block gaps sh ting multi-band operation with inter RI	measurement filter centre frequency, f_offset $-28.5dBm - \frac{7}{5} \left( \frac{f - offset}{MHz} - 0.05 \right) dB$ $0.05 \text{ MHz} \le f_offset < 5.05 \text{ MHz}$ $-28.5dBm - \frac{7}{5} \left( \frac{f - offset}{MHz} - 0.05 \right) dB$ $5.05 \text{ MHz} \le f_offset < 0.05 \text{ MHz}$ $-35.5 \text{ dBm}$ $10.05 \text{ MHz} \le f_offset < f_offset_{max}$ $-37 \text{ dBm}$ (Note 6)orting non-contiguous spectrum operation within any operating band the test requises is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub-requirement within sub-block gaps shall be -37 dBm/100 kHz.ting multi-band operation with inter RF bandwidth gap < 20MHz the test requirement

# Table 6.6.3.5.2A-3a: Local Area BS operating band unwanted emission limits for 5, 10, 15 and 20 MHz channel bandwidth (E-UTRA bands >3GHz)

Frequency offset of measurement filter -3dB point, ∆f	measurement filter centre	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 5 MHz	0.05 MHz $\leq$ f_offset < 5.05 MHz	$-28.2dBm - \frac{7}{5} \cdot \left(\frac{f \_ offset}{MHz} - 0.05\right) dB$	100 kHz
$5 \text{ MHz} \le \Delta f < \\ \min(10 \text{ MHz}, \Delta f_{max})$	5.05 MHz $\leq$ f_offset < min(10.05 MHz, f_offset <sub>max</sub> )	-35.2 dBm	100 kHz
10 MHz $\leq \Delta f \leq \Delta f_{max}$	$10.05 \text{ MHz} \le f_\text{offset} < f_\text{offset}_{max}$	-37 dBm (Note 6)	100 kHz
NOTE 1:       For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is Δf ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -37 dBm/100 kHz.         NOTE 2:       For BS supporting multi-band operation with inter RF bandwidth gap < 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.			

#### 6.6.3.5.2B Test requirements for Home BS (Category A and B)

For Home BS in E-UTRA bands  $\leq$ 3GHz, emissions shall not exceed the maximum levels specified in Tables 6.6.3.5.2B-1, 6.6.3.5.2B-2 and 6.6.3.5.2B-3.

For Home BS in E-UTRA bands >3GHz, emissions shall not exceed the maximum levels specified in Tables 6.6.3.5.2B-1a, 6.6.3.5.2B-2a and 6.6.3.5.2B-3a.

# Table 6.6.3.5.2B-1: Home BS operating band unwanted emission limits for 1.4 MHz channel bandwidth (E-UTRA bands ≤3GHz)

Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 3)
$0.05 \text{ MHz} \le f_\text{offset} < 1.45 \text{ MHz}$	$-28.5dBm + \frac{6}{1.4} \left(\frac{f \_ offset}{MHz} - 0.05\right) dB$	100 kHz
1.45 MHz ≤ f_offset < 2.85 MHz	-34.5 dBm	100 kHz
$3.3 \text{ MHz} \leq f\_offset < f\_offset_{max}$	$\begin{cases} P - 52dB, \ 2dBm \le P \le 20dBm \\ 50dPm, \ P \le 2dPm \end{cases}$	1MHz
	measurement filter centre frequency, f_offset0.05 MHz ≤ f_offset < 1.45 MHz	measurement filter centre frequency, f_offset-28.5dBm + $\frac{6}{1.4} \left( \frac{f_offset}{MHz} - 0.05 \right) dB$ 0.05 MHz $\leq$ f_offset < 1.45 MHz

# Table 6.6.3.5.2B-1a: Home BS operating band unwanted emission limits for 1.4 MHz channel bandwidth (E-UTRA bands >3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 1.4 MHz	$0.05 \text{ MHz} \le f_{offset} < 1.45 \text{ MHz}$	$-28.2dBm - \frac{6}{1.4} \cdot \left(\frac{f \_offset}{MHz} - 0.05\right) dB$	100 kHz
1.4 MHz ≤ ∆f < 2.8 MHz	1.45 MHz ≤ f_offset < 2.85 MHz	-34.2 dBm	100 kHz
$2.8 \text{ MHz} \leq \Delta f \leq \Delta f_{max}$	3.3 MHz $\leq$ f_offset < f_offset <sub>max</sub>	$\begin{cases} P - 52dB, \ 2\text{dBm} \le P \le 20\text{dBm} \\ -50dBm, \ P < 2\text{dBm} \end{cases}$	1MHz

# Table 6.6.3.5.2B-2: Home BS operating band unwanted emission limits for 3 MHz channel bandwidth (E-UTRA bands ≤3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 3 MHz	$0.05 \text{ MHz} \le f_{offset} < 3.05 \text{ MHz}$	$-32.5dBm - 2\left(\frac{f - offset}{MHz} - 0.05\right)dB$	100 kHz
3 MHz ≤ Δf < 6 MHz	3.05 MHz ≤ f_offset < 6.05 MHz	-38.5 dBm	100 kHz
$6 \text{ MHz} \leq \Delta f \leq \Delta f_{max}$	$6.5 \text{ MHz} \leq f\_offset < f\_offset_{max}$	$\int P - 52 dB$ , $2 dBm \le P \le 20 dBm$	1MHz
		_−50 <i>dBm</i> , P<2dBm	

# Table 6.6.3.5.2B-2a: Home BS operating band unwanted emission limits for 3 MHz channel bandwidth(E-UTRA bands >3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 3 MHz	$0.05 \text{ MHz} \le f_{offset} < 3.05 \text{ MHz}$	$-32.2dBm - 2 \cdot \left(\frac{f \_offset}{MHz} - 0.05\right) dB$	100 kHz
$3 \text{ MHz} \le \Delta f < 6 \text{ MHz}$	3.05 MHz ≤ f_offset < 6.05 MHz	-38.2 dBm	100 kHz
$6 \text{ MHz} \leq \Delta f \leq \Delta f_{\text{max}}$	$6.5 \text{ MHz} \leq f\_offset < f\_offset_{max}$	$\int P - 52 dB$ , $2 dBm \le P \le 20 dBm$	1MHz
		_−50 <i>dBm</i> , P<2dBm	

## Table 6.6.3.5.2B-3: Home BS operating band unwanted emission limits for 5, 10, 15 and 20 MHz channel bandwidth (E-UTRA bands ≤3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 3)
$0 \text{ MHz} \le \Delta f < 5 \text{ MHz}$	0.05 MHz ≤ f_offset < 5.05 MHz	$-34.5dBm - \frac{6}{5} \left( \frac{f \_ offset}{MHz} - 0.05 \right) dB$	100 kHz
5 MHz $\leq \Delta f < min(10)$ MHz, $\Delta f_{max}$	5.05 MHz ≤ f_offset < min(10.05 MHz, f_offset <sub>max</sub> )	-40.5 dBm	100 kHz
10 MHz $\leq \Delta f \leq \Delta f_{max}$	10.5 MHz ≤ f_offset < f_offset <sub>max</sub>	$\begin{cases} P-52dB, \ 2dBm \le P \le 20dBm\\ -50dBm, \ P < 2dBm\\ (Note 6) \end{cases}$	1MHz

# Table 6.6.3.5.2B-3a: Home BS operating band unwanted emission limits for 5, 10, 15 and 20 MHz channel bandwidth (E-UTRA bands >3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 5 MHz	0.05 MHz ≤ f_offset < 5.05 MHz	$-34.2dBm - \frac{6}{5} \cdot \left(\frac{f \_offset}{MHz} - 0.05\right) dB$	100 kHz
5 MHz ≤ ∆f < min(10 MHz, Δf <sub>max</sub> )	5.05 MHz ≤ f_offset < min(10.05 MHz, f_offset <sub>max</sub> )	-40.2 dBm	100 kHz
$10 \text{ MHz} \le \Delta f \le \Delta f_{max}$	10.5 MHz $\leq$ f_offset < f_offset <sub>max</sub>	$\begin{cases} P - 52dB, \ 2\text{dBm} \le P \le 20\text{dBm} \\ -50dBm, \ P < 2\text{dBm} \end{cases}$	1MHz
		(Note 6)	

#### 6.6.3.5.2C Test requirements for Medium Range BS (Category A and B)

For Medium Range BS in E-UTRA bands  $\leq$ 3GHz, emissions shall not exceed the maximum levels specified in Tables 6.6.3.5.2C-1, 6.6.3.5.2C-2, 6.6.3.5.2C-3, 6.6.3.5.2C-4, 6.6.3.5.2C-5 and 6.6.3.5.2C-6.

For Medium Range BS in E-UTRA bands >3GHz, emissions shall not exceed the maximum levels specified in Tables 6.6.3.5.2C-1a, 6.6.3.5.2C-2a, 6.6.3.5.2C-3a, 6.6.3.5.2C-4a, 6.6.3.5.2C-5a and 6.6.3.5.2C-6a.

# Table 6.6.3.5.2C-1: Medium Range BS operating band unwanted emission limits for 1.4 MHz channel bandwidth, 31 <P ≤ 38 dBm (E-UTRA bands ≤3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 1.4 MHz	0.05 MHz ≤ f_offset < 1.45 MHz	$P-43.5dB - \frac{10}{1.4} \left( \frac{f \_offset}{MHz} - 0.05 \right) dB$	100 kHz
$1.4 \text{ MHz} \le \Delta f < 2.8 \text{ MHz}$	1.45 MHz ≤ f_offset < 2.85 MHz	P-53.5dB	100 kHz
$2.8 \text{ MHz} \le \Delta f \le \Delta f_{max}$	2.85 MHz $\leq$ f_offset < f_offset <sub>max</sub>	-25dBm	100 kHz
NOTE 1: For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is Δf ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap,			
NOTE 2: For BS suppor inter RF bandw	where the test requirement within sub-block gaps shall be -25dBm/100kHz. NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap < 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.		

# Table 6.6.3.5.2C-1a: Medium Range BS operating band unwanted emission limits for 1.4 MHz channel bandwidth, 31 <P ≤ 38 dBm (E-UTRA bands >3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 1.4 MHz	0.05 MHz ≤ f_offset < 1.45 MHz	$P-43.2dB - \frac{10}{1.4} \left( \frac{f \_ offset}{MHz} - 0.05 \right) dB$	100 kHz
1.4 MHz ≤ ∆f < 2.8 MHz	1.45 MHz ≤ f_offset < 2.85 MHz	P-53.2dB	100 kHz
2.8 MHz $\leq \Delta f \leq \Delta f_{max}$	2.85 MHz $\leq$ f_offset < f_offset <sub>max</sub>	-25dBm	100 kHz
NOTE 1: For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the			
sub block gap.	Exception is $\Delta f \ge 10$ MHz from both a	djacent sub blocks on each side of the sub-	block gap,

where the test requirement within sub-block gaps shall be -25dBm/100kHz.

NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap < 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.

# Table 6.6.3.5.2C-2: Medium Range BS operating band unwanted emission limits for 1.4 MHz channel bandwidth, P ≤ 31 dBm (E-UTRA bands ≤3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 1.4 MHz	0.05 MHz ≤ f_offset < 1.45 MHz	$-12.5 \text{dBm} - \frac{10}{1.4} \left( \frac{f \_offset}{MHz} - 0.05 \right) \text{dB}$	100 kHz
$1.4 \text{ MHz} \le \Delta f < 2.8 \text{ MHz}$	1.45 MHz ≤ f_offset < 2.85 MHz	-22.5 dBm	100 kHz
$2.8 \text{ MHz} \le \Delta f \le \Delta f_{max}$	2.85 MHz $\leq$ f_offset < f_offset <sub>max</sub>	-25dBm	100 kHz
sub-block gaps	NOTE 1: For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the		
sub block gap. Exception is ∆f ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -25dBm/100kHz.			
NOTE 2: For BS suppor	NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap < 20MHz the test requirement within the		ent within the
		ve sum of contributions from adjacent sub-b	locks on each
side of the inte	r RF bandwidth gap.		

# Table 6.6.3.5.2C-2a: Medium Range BS operating band unwanted emission limits for 1.4 MHz channel bandwidth, $P \le 31$ dBm (E-UTRA bands >3GHz)

Frequency offset of measurement         Frequency offset of measurement filter centre           filter -3dB point, Δf         frequency, f_offset		Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
$0 \text{ MHz} \le \Delta f < 1.4 \text{ MHz}$	$0.05 \text{ MHz} \le f_{offset} < 1.45 \text{ MHz}$	$-12.2 dBm - \frac{10}{1.4} \left( \frac{f \_offset}{MHz} - 0.05 \right) dB$	100 kHz
1.4 MHz ≤ ∆f < 2.8 MHz	1.45 MHz ≤ f_offset < 2.85 MHz	-22.2 dBm	100 kHz
$2.8 \text{ MHz} \le \Delta f \le \Delta f_{max}$	2.85 MHz $\leq$ f_offset < f_offset <sub>max</sub>	-25dBm	100 kHz
NOTE 1: For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is ∆f ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -25dBm/100kHz.			

NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap < 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.

# Table 6.6.3.5.2C-3: Medium Range BS operating band unwanted emission limits for 3 MHz channel bandwidth, 31 <P ≤ 38 dBm (E-UTRA bands ≤3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
$0 \text{ MHz} \le \Delta f < 3 \text{ MHz}$	0.05 MHz ≤ f_offset < 3.05 MHz	$P-47.5 dB - \frac{10}{3} \left( \frac{f - offset}{MHz} - 0.05 \right) dB$	100 kHz
3 MHz ≤ ∆f < 6 MHz	3.05 MHz ≤ f_offset < 6.05 MHz	P-57.5dB	100 kHz
$6 \text{ MHz} \leq \Delta f \leq \Delta f_{max}$	$6.05 \text{ MHz} \le f_\text{offset} < f_\text{offset}_{max}$	Min(P-59dB, -25dBm)	100 kHz
		ation within any operating band the test requ	
		f contributions from adjacent sub blocks on djacent sub blocks on each side of the sub-	

where the test requirement within sub-block gaps shall be Min(P-59dB, -25dBm)/100kHz.

NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap < 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.

# Table 6.6.3.5.2C-3a: Medium Range BS operating band unwanted emission limits for 3 MHz channel bandwidth, 31 <P ≤ 38 dBm (E-UTRA bands >3GHz)

Frequency offset of measurement         Frequency offset of measurement filter centre           filter -3dB point, Δf         frequency, f_offset		Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 3 MHz	0.05 MHz ≤ f_offset < 3.05 MHz	$P-47.2 dB - \frac{10}{3} \left( \frac{f - offset}{MHz} - 0.05 \right) dB$	100 kHz
$3 \text{ MHz} \le \Delta f < 6 \text{ MHz}$	$3.05 \text{ MHz} \le f_\text{offset} < 6.05 \text{ MHz}$	P-57.2dB	100 kHz
$6 \text{ MHz} \le \Delta f \le \Delta f_{max}$	$6.05 \text{ MHz} \leq f_\text{offset} < f_\text{offset}_{max}$	Min(P-59dB, -25dBm)	100 kHz
NOTE 1: For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is ∆f ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be Min(P-59dB, -25dBm)/100kHz.			
NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap < 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.			

# Table 6.6.3.5.2C-4: Medium Range BS operating band unwanted emission limits for 3 MHz channel bandwidth, P ≤ 31 dBm (E-UTRA bands ≤3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
$0 \text{ MHz} \le \Delta f < 3 \text{ MHz}$	0.05 MHz ≤ f_offset < 3.05 MHz	$-16.5 \text{dBm} - \frac{10}{3} \left( \frac{f \_ offset}{MHz} - 0.05 \right) dB$	100 kHz
3 MHz ≤ ∆f < 6 MHz	3.05 MHz ≤ f_offset < 6.05 MHz	-26.5 dBm	100 kHz
$6 \text{ MHz} \leq \Delta f \leq \Delta f_{max}$	$6.05 \text{ MHz} \le f_\text{offset} < f_\text{offset}_{max}$	-28 dBm	100 kHz
		ation within any operating band the test required to the test required to the test required to the test of the test required to the test of test o	

sub block gap. Exception is  $\Delta f \ge 10$  MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -28dBm/100kHz.

NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap < 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.

# Table 6.6.3.5.2C-4a: Medium Range BS operating band unwanted emission limits for 3 MHz channel bandwidth, $P \le 31 \text{ dBm}$ (E-UTRA bands >3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
$0 \text{ MHz} \le \Delta f < 3 \text{ MHz}$	0.05 MHz ≤ f_offset < 3.05 MHz	$-16.2 \text{dBm} - \frac{10}{3} \left( \frac{f \_ offset}{MHz} - 0.05 \right) dB$	100 kHz
3 MHz ≤ ∆f < 6 MHz	3.05 MHz ≤ f_offset < 6.05 MHz	-26.2 dBm	100 kHz
$6 \text{ MHz} \leq \Delta f \leq \Delta f_{max}$	6.05 MHz ≤ f_offset < f_offset <sub>max</sub>	-28 dBm	100 kHz
		ation within any operating band the test request for the test request for the test request sub blocks on	

sub block gap. Exception is  $\Delta f \ge 10$  MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -28dBm/100kHz.

NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap < 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.

# Table 6.6.3.5.2C-5: Medium Range BS operating band unwanted emission limits for 5, 10, 15 and 20 MHz channel bandwidth, $31 < P \le 38$ dBm (E-UTRA bands $\le 3$ GHz)

measureme	equency offset of measurementFrequency offset of measurement filter centre frequency, f_offset		Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 5	MHz	0.05 MHz ≤ f_offset < 5.05 MHz	$P-51.5 dB - \frac{7}{5} \left( \frac{f - offset}{MHz} - 0.05 \right) dB$	100 kHz
5 MHz ≤ ∆f < m MHz, Δf <sub>max</sub>	· ·	5.05 MHz $\leq$ f_offset < min(10.05 MHz, f_offset <sub>max</sub> )	P-58.5dB	100 kHz
10 MHz $\leq \Delta f \leq$	∖f <sub>max</sub>	$10.05 \text{ MHz} \leq f\_offset < f\_offset_{max}$	Min(P-60dB, -25dBm) (Note 6)	100 kHz
<ul> <li>NOTE 1: For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is ∆f ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be Min(P-60dB, -25dBm)/100kHz.</li> <li>NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap &lt; 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.</li> </ul>				

# Table 6.6.3.5.2C-5a: Medium Range BS operating band unwanted emission limits for 5, 10, 15 and 20 MHz channel bandwidth, $31 < P \le 38$ dBm (E-UTRA bands >3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 5 MHz	0.05 MHz ≤ f_offset < 5.05 MHz	$P-51.2dB - \frac{7}{5} \left( \frac{f \_ offset}{MHz} - 0.05 \right) dB$	100 kHz
5 MHz ≤ ∆f < min(10 MHz, Δf <sub>max</sub> )	5.05 MHz ≤ f_offset < min(10.05 MHz, f_offset <sub>max</sub> )	P-58.2dB	100 kHz
10 MHz $\leq \Delta f \leq \Delta f_{max}$	$10.05 \text{ MHz} \leq f_\text{offset} < f_\text{offset}_{max}$	Min(P-60dB, -25dBm) (Note 6)	100 kHz
<ul> <li>NOTE 1: For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is ∆f ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be Min(P-60dB, -25dBm)/100kHz.</li> <li>NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap &lt; 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each</li> </ul>			

side of the inter RF bandwidth gap.

# Table 6.6.3.5.2C-6: Medium Range BS operating band unwanted emission limits for 5, 10, 15 and 20 MHz channel bandwidth, $P \le 31$ dBm (E-UTRA bands $\le 3GHz$ )

Frequency offset of measurement         Frequency offset of measurement filter centre           filter -3dB point, Δf         frequency, f_offset		Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
$0 \text{ MHz} \le \Delta f < 5 \text{ MHz} \qquad 0.05 \text{ MHz} \le f_{\text{offset}} < 5.05$		$-20.5 \text{ dBm} - \frac{7}{5} \left( \frac{f \_ offset}{MHz} - 0.05 \right) dB$	100 kHz
5 MHz ≤ ∆f < min(10 MHz, Δf <sub>max</sub> )	5.05 MHz ≤ f_offset < min(10.05 MHz, f_offset <sub>max</sub> )	-27.5 dBm	100 kHz
$10 \text{ MHz} \le \Delta f \le \Delta f_{max} \qquad 10.05 \text{ MHz} \le f_{offset} < f_{offset}_{max}$		-29 dBm (Note 6)	100 kHz
<ul> <li>NOTE 1: For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is ∆f ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -29dBm/100kHz.</li> <li>NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap &lt; 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.</li> </ul>			

# Table 6.6.3.5.2C-6a: Medium Range BS operating band unwanted emission limits for 5, 10, 15 and 20 MHz channel bandwidth, $P \le 31$ dBm (E-UTRA bands >3GHz)

Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement (Note 1, 2)	Measurement bandwidth (Note 3)
0 MHz ≤ ∆f < 5 MHz	0.05 MHz ≤ f_offset < 5.05 MHz	$-20.2 \text{ dBm} - \frac{7}{5} \left( \frac{f \_ offset}{MHz} - 0.05 \right) dB$	100 kHz
5 MHz $\leq \Delta f < min(10)$ MHz, $\Delta f_{max}$	5.05 MHz ≤ f_offset < min(10.05 MHz, f_offset <sub>max</sub> )	-27.2 dBm	100 kHz
$10 \text{ MHz} \le \Delta f \le \Delta f_{max} \qquad 10.05 \text{ MHz} \le f_{offset} < f_{offset}_{max}$		-29 dBm (Note 6)	100 kHz
<ul> <li>NOTE 1: For a BS supporting non-contiguous spectrum operation within any operating band the test requirement within sub-block gaps is calculated as a cumulative sum of contributions from adjacent sub blocks on each side of the sub block gap. Exception is ∆f ≥ 10MHz from both adjacent sub blocks on each side of the sub-block gap, where the test requirement within sub-block gaps shall be -29dBm/100kHz.</li> <li>NOTE 2: For BS supporting multi-band operation with inter RF bandwidth gap &lt; 20MHz the test requirement within the inter RF bandwidth gaps is calculated as a cumulative sum of contributions from adjacent sub-blocks on each side of the inter RF bandwidth gap.</li> </ul>			

#### 6.6.3.5.3 Additional requirements

In certain regions the following requirement may apply. For E-UTRA BS operating in Bands 5, 26, 27 or 28, emissions shall not exceed the maximum levels specified in Tables 6.6.3.5.3-1.

Channel bandwidth	Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 3)
1.4 MHz	$0 \text{ MHz} \le \Delta f < 1 \text{ MHz}$	0.005 MHz ≤ f_offset < 0.995 MHz	-14 dBm	10 kHz
3 MHz	0 MHz ≤ ∆f < 1 MHz	0.015 MHz ≤ f_offset < 0.985 MHz	-13 dBm	30 kHz
5 MHz	$0 \text{ MHz} \le \Delta f < 1 \text{ MHz}$	0.015 MHz ≤ f_offset < 0.985 MHz	-15 dBm	30 kHz
10 MHz	$0 \text{ MHz} \le \Delta f < 1 \text{ MHz}$	$0.05 \text{ MHz} \le f_{offset} < 0.95 \text{ MHz}$	-13 dBm	100 kHz
15 MHz	$0 \text{ MHz} \le \Delta f < 1 \text{ MHz}$	$0.05 \text{ MHz} \le f_{offset} < 0.95 \text{ MHz}$	-13 dBm	100 kHz
20 MHz	$0 \text{ MHz} \le \Delta f < 1 \text{ MHz}$	$0.05 \text{ MHz} \le f_{offset} < 0.95 \text{ MHz}$	-13 dBm	100 kHz
All	1 MHz $\leq \Delta f < \Delta f_{max}$	1.05 MHz ≤ f_offset < f_offset <sub>max</sub>	-13 dBm	100 kHz

In certain regions the following requirement may apply. For E-UTRA BS operating in Bands 2, 4, 10, 23, 25, 35, 36, 41, emissions shall not exceed the maximum levels specified in Table 6.6.3.5.3-2.

Table 6.6.3.5.3-2: Additional	operating band unwanted	l emission limits for E-UTRA bands>1GHz
-------------------------------	-------------------------	---

Channel bandwidth	Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 3)
1.4 MHz	$0 \text{ MHz} \le \Delta f < 1 \text{ MHz}$	0.005 MHz ≤ f_offset < 0.995 MHz	-14 dBm	10 kHz
3 MHz	$0 \text{ MHz} \le \Delta f < 1 \text{ MHz}$	0.015 MHz ≤ f_offset < 0.985 MHz	-13 dBm	30 kHz
5 MHz	$0 \text{ MHz} \le \Delta f < 1 \text{ MHz}$	0.015 MHz ≤ f_offset < 0.985 MHz	-15 dBm	30 kHz
10 MHz	$0 \text{ MHz} \le \Delta f < 1 \text{ MHz}$	0.05 MHz ≤ f_offset < 0.95 MHz	-13 dBm	100 kHz
15 MHz	$0 \text{ MHz} \le \Delta f < 1 \text{ MHz}$	$0.05 \text{ MHz} \le f_{offset} < 0.95 \text{ MHz}$	-15 dBm	100 kHz
20 MHz	$0 \text{ MHz} \le \Delta f < 1 \text{ MHz}$	$0.05 \text{ MHz} \le f_{offset} < 0.95 \text{ MHz}$	-16 dBm	100 kHz
All	1 MHz $\leq \Delta f < \Delta f_{max}$	$1.5 \text{ MHz} \le f_\text{offset} < f_\text{offset}_{max}$	-13 dBm	1 MHz

In certain regions the following requirement may apply. For E-UTRA BS operating in Bands 12, 13, 14, 17, 29 emissions shall not exceed the maximum levels specified in Table 6.6.3.5.3-3.

# Table 6.6.3.5.3-3: Additional operating band unwanted emission limits for E-UTRA (bands 12, 13, 14, 17 and 29)

Channel bandwidth	Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 3)
All	0 MHz ≤ ∆f < 100 kHz	0.015 MHz ≤ f_offset < 0.085 MHz	-13 dBm	30 kHz
All	100 kHz $\leq \Delta f < \Delta f_{max}$	150 kHz $\leq$ f_offset < f_offset <sub>max</sub>	-13 dBm	100 kHz

In certain regions, the following requirements may apply to an E-UTRA TDD BS operating in the same geographic area and in the same operating band as another E-UTRA TDD system without synchronisation. For this case the emissions shall not exceed -52 dBm/MHz in each supported downlink operating band, except in:

- The frequency range from 10 MHz below the lower channel edge to the frequency 10 MHz above the upper channel edge of each supported band.

In certain regions the following requirement may apply for protection of DTT. For E-UTRA BS operating in Band 20, the level of emissions in the band 470-790 MHz, measured in an 8MHz filter bandwidth on centre frequencies  $F_{filter}$  according to Table 6.6.3.3-4, shall not exceed the maximum emission level  $P_{EM,N}$  declared by the manufacturer. This requirement applies in the frequency range 470-790 MHz even though part of the range falls in the spurious domain.

Table 6.6.3.5.3-4: Declared emissions levels for protection of DTT

Filter centre frequency,	Measurement	Declared emission level
F <sub>filter</sub>	bandwidth	[dBm]
F <sub>filter</sub> = 8*N + 306 (MHz); 21 ≤ N ≤ 60	8 MHz	P <sub>EM,N</sub>

Note: The regional requirement is defined in terms of EIRP (effective isotropic radiated power), which is dependent on both the BS emissions at the antenna connector and the deployment (including antenna gain and feeder loss). The requirement defined above provides the characteristics of the base station needed to verify compliance with the regional requirement. Compliance with the regional requirement can be determined using the method outlined in Annex G of [2].

In certain regions the following requirement may apply for the protection of systems operating in frequency bands adjacent to band 1 as defined in clause 5.5, in geographic areas in which both an adjacent band service E-UTRA are deployed.

The power of any spurious emission shall not exceed:

Operating Band	Frequency range	Maximum Level	Measurement Bandwidth
1	2100-2105 MHz	-30 + 3.4 · (f - 2100 MHz) dBm	1 MHz
	2175-2180 MHz	-30 + 3.4 · (2180 MHz - f) dBm	1 MHz

 Table 6.6.3.5.3-5: Emissions limits for protection of adjacent band services

In regions where FCC regulation applies, requirements for protection of GPS according to FCC Order DA 10-534 applies for operation in Band 24. The following normative requirement covers the base station, to be used together with other information about the site installation to verify compliance with the requirement in FCC Order DA 10-534. The requirement applies to BS operating in Band 24 to ensure that appropriate interference protection is provided to the 1559 – 1610 MHz band. This requirement applies to the frequency range 1559-1610 MHz, even though part of this range falls within the spurious domain.

The level of emissions in the 1559 – 1610 MHz band, measured in measurement bandwidth according to Table 6.6.3.5.3-6 shall not exceed the maximum emission levels  $P_{E_{\perp}IMHz}$  and  $P_{E_{\perp}IkHz}$  declared by the manufacturer.

Table 6.6.3.5.3-6: Declared emissions levels for protection of the 1559-1610 MHz band

Operating Band	Frequency range	Declared emission level [dBW] (Measurement bandwidth = 1 MHz)	Declared emission level [dBW] of discrete emissions of less than 700 Hz bandwidth (Measurement bandwidth = 1 kHz)
24	1559 - 1610 MHz	P <sub>E_1MHz</sub>	P <sub>E_1kHz</sub>

Note: The regional requirement in FCC Order DA 10-534 is defined in terms of EIRP (effective isotropic radiated power), which is dependent on both the BS emissions at the antenna connector and the deployment (including antenna gain and feeder loss). The EIRP level is calculated using:  $P_{EIRP} = P_E + G_{ant}$  where  $P_E$  denotes the BS unwanted emission level at the antenna connector,  $G_{ant}$  equals the BS antenna gain minus feeder loss. The requirement defined above provides the characteristics of the base station needed to verify compliance with the regional requirement.

The following requirement may apply to E-UTRA BS operating in Band 41 in certain regions. Emissions shall not exceed the maximum levels specified in Table 6.6.3.5.3-7.

Table 6.6.3.5.3-7: A	dditional operating l	band unwanted	emission limits for Band 41

Channel bandwidth	Frequency offset of measurement filter -3dB point, ∆f	Frequency offset of measurement filter centre frequency, f_offset	Test requirement	Measurement bandwidth (Note 5)	
10 MHz	10 MHz ≤ ∆f < 20 MHz	10.5 MHz ≤ f_offset < 19.5 MHz	-22 dBm	1 MHz	
20 MHz 20 MHz ≤ ∆f < 40 MHz		20.5 MHz ≤ f_offset < 39.5 MHz	-22 dBm	1 MHz	
NOTE: This requirement applies for E-UTRA carriers allocated within 2545-2575MHz.					

The following notes are common to all subclauses in 6.6.3.5:

- NOTE 3: As a general rule, the resolution bandwidth of the measuring equipment should be equal to the measurement bandwidth. However, to improve measurement accuracy, sensitivity and efficiency, the resolution bandwidth can be smaller than the measurement bandwidth. When the resolution bandwidth is smaller than the measurement bandwidth, the result should be integrated over the measurement bandwidth in order to obtain the equivalent noise bandwidth of the measurement bandwidth.
- NOTE 4: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test is defined in Annex G. The explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.
- NOTE 5: This frequency range ensures that the range of values of f\_offset is continuous.

NOTE 6: The requirement is not applicable when  $\Delta f_{max} < 10$  MHz.

NOTE 7: For Home BS, the parameter P is defined as the aggregated maximum power of all transmit antenna ports of Home BS.

### 6.6.4 Transmitter spurious emissions

#### 6.6.4.1 Definition and applicability

Spurious emissions are emissions which are caused by unwanted transmitter effects such as harmonics emission, parasitic emission, intermodulation products and frequency conversion products, but exclude out of band emissions. This is measured at the base station antenna connector.

The transmitter spurious emission limits apply from 9 kHz to 12.75 GHz, excluding the frequency range from 10 MHz below the lowest frequency of the downlink operating band up to 10 MHz above the highest frequency of the downlink operating band (see Table 5.5-1). For BS capable of multi-band operation where multiple bands are mapped on the same antenna connector, this exclusion applies for each supported operating band. For BS capable of multi-band operation where multiple bands are mapped on separate antenna connectors, the single-band requirements apply and the multi-band exclusions and provisions are not applicable.

Exceptions are the requirements in Table 6.6.4.5.4-2, Table 6.6.4.5.4-3, Table 6.6.4.5.4-4, and specifically stated exceptions in Table 6.6.4.5.4-1 and Table 6.6.4.5.4-1a that apply also closer than 10 MHz from the downlink operating band. For some operating bands the upper frequency limit is higher than 12.75 GHz.

The requirements shall apply whatever the type of transmitter considered (single carrier, multi-carrier and/or CA). It applies for all transmission modes foreseen by the manufacturer's specification.

Unless otherwise stated, all requirements are measured as mean power (RMS).

#### 6.6.4.2 Minimum Requirements

The minimum requirement is in TS 36.104 [2] subclause 6.6.4.

#### 6.6.4.3 Test Purpose

This test measures conducted spurious emission from the E-UTRA BS transmitter antenna connector, while the transmitter is in operation.

#### 6.6.4.4 Method of Test

#### 6.6.4.4.1 Initial conditions

Test environment: normal; see Annex D.2.

RF channels to be tested for single carrier: B, M and T; see subclause 4.7.

- RF bandwidth positions to be tested for multi-carrier and/or CA:  $B_{RFBW}$ ,  $M_{RFBW}$  and  $T_{RFBW}$  in single-band operation, see subclause 4.7.1;  $B_{RFBW}$ \_T"<sub>RFBW</sub> and B"<sub>RFBW</sub>\_T<sub>RFBW</sub> in multi-band operation, see subclause 4.7.1.
  - 1) Connect the BS antenna connector to a measurement receiver according to Annex I.1.1 using an attenuator or a directional coupler if necessary
  - 2) Measurements shall use a measurement bandwidth in accordance to the conditions in TS 36.104 [2] subclause 6.6.4.
  - 3) Detection mode: True RMS.
  - 4) Configure the BS with transmitter(s) active.

#### 6.6.4.4.2 Procedure

1) For a BS declared to be capable of single carrier operation only, set the BS to transmit a signal according to E-TM1.1 at manufacturer's declared rated output power.

For a BS declared to be capable of multi-carrier and/or CA operation, set the base station to transmit according to E-TM1.1 on all carriers configured using the applicable test configuration and corresponding power setting specified as in sub-clause 4.10 and 4.11.

2) Measure the emission at the specified frequencies with specified measurement bandwidth and note that the measured value does not exceed the specified value.

In addition, for a multi-band capable BS, the following steps shall apply:

- 3) For multi-band capable BS and single band tests, repeat the steps above per involved band where single band test configurations and test models shall apply with no carrier activated in the other band.
- 4) For multi-band capable BS with separate antenna connector, the antenna connector not being under test in case of single-band or multi-band test shall be terminated.

#### 6.6.4.5 Test requirements

The measurement result in step 2 of 6.6.4.4.2 shall not exceed the maximum level specified in Table 6.6.4.5.1-1 to Table 6.6.4.5.6-1 if applicable for the BS under test.

NOTE: If a Test Requirement in this clause differs from the corresponding Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance are given in Annex G.

As mandatory requirement, either subclause 6.6.4.5.1 (Category A limits) or subclause 6.6.4.5.2 (Category B limits) shall apply. The application of either Category A or Category B limits shall be the same as for Operating band unwanted emissions in subclause 6.6.3.

#### 6.6.4.5.1 Spurious emissions (Category A)

The power of any spurious emission shall not exceed the limits in Table 6.6.4.5.1-1.

Frequency range	Maximum level	Measurement Bandwidth	Note	
9kHz - 150kHz		1 kHz	Note 1	
150kHz - 30MHz		10 kHz	Note 1	
30MHz - 1GHz		100 kHz	Note 1	
1GHz – 12.75 GHz	-13 dBm	1 MHz	Note 2	
12.75 GHz – 5 <sup>th</sup> harmonic	-13 0511	1 MHz	Note 2, Note 3	
of the upper frequency edge of the DL operating band in GHz				
NOTE 1: Bandwidth as in ITU-R SM.329 [5], s4.1				
NOTE 2: Bandwidth as in ITU-R SM.329 [5], s4.1. Upper frequency as in ITU-R SM.329 [5], s2.5 table 1				
NOTE 3: Applies only for Bands 22, 42 and 43.				

Table 6.6.4.5.1-1: BS Spurious emission limits, Category A

#### 6.6.4.5.2 Spurious emissions (Category B)

The power of any spurious emission shall not exceed the limits in Table 6.6.4.5.2-1.

Frequency range	Maximum Level	Measurement Bandwidth	Note		
$9 \text{ kHz} \leftrightarrow 150 \text{ kHz}$	-36 dBm	1 kHz	Note 1		
150 kHz $\leftrightarrow$ 30 MHz	-36 dBm	10 kHz	Note 1		
$30 \text{ MHz} \leftrightarrow 1 \text{ GHz}$	-36 dBm	100 kHz	Note 1		
$1 \text{ GHz} \leftrightarrow 12.75 \text{ GHz}$	-30 dBm	1 MHz	Note 2		
12.75 GHz ↔ 5 <sup>th</sup> harmonic of the upper frequency edge of the DL operating band in GHz	-30 dBm	1 MHz	Note 2, Note 3		
NOTE 1: Bandwidth as in ITU-R SM.329 [5], s4.1					
NOTE 2: Bandwidth as in ITU-R SM.329 [5], s4.1. Upper frequency as in ITU-R SM.329 [5], s2.5 table 1					
NOTE 3: Applies only for Bands 22	2, 42 and 43.				

#### Table 6.6.4.5.2-1: BS Spurious emissions limits, Category B

#### 6.6.4.5.3 Protection of the BS receiver of own or different BS

This requirement shall be applied for E-UTRA FDD operation in paired operating bands in order to prevent the receivers of the BSs being desensitised by emissions from a BS transmitter. It is measured at the transmit antenna port for any type of BS which has common or separate Tx/Rx antenna ports.

The power of any spurious emission shall not exceed the limits in Table 6.6.4.5.3-1.

	Frequency range	Maximum Level	Measurement Bandwidth	Note
Wide Area BS	F <sub>UL_low</sub> – F <sub>UL_high</sub>	-96 dBm	100 kHz	
Medium Range BS	F <sub>UL_low</sub> – F <sub>UL_high</sub>	-91 dBm	100 kHz	
Local Area BS	F <sub>UL_low</sub> – F <sub>UL_high</sub>	-88 dBm	100 kHz	
Home BS	F <sub>UL_low</sub> – F <sub>UL_high</sub>	-88 dBm	100 kHz	

Table 6.6.4.5.3-1: BS Spurious emissions limits for protection of the BS receiver

#### 6.6.4.5.4 Co-existence with other systems in the same geographical area

#### 6.6.4.5.4.1 Void

These requirements may be applied for the protection of system operating in frequency ranges other than the E-UTRA BS operating band. The limits may apply as an optional protection of such systems that are deployed in the same geographical area as the E-UTRA BS, or they may be set by local or regional regulation as a mandatory requirement for an E-UTRA operating band. It is in some cases not stated in the present document whether a requirement is mandatory or under what exact circumstances that a limit applies, since this is set by local or regional regulation. An overview of regional requirements in the present document is given in Clause 4.3.

Some requirements may apply for the protection of specific equipment (UE, MS and/or BS) or equipment operating in specific systems (GSM, CDMA, UTRA, E-UTRA, etc.) as listed below. The power of any spurious emission shall not exceed the limits of Table 6.6.4.5.4-1 for a BS where requirements for co-existence with the system listed in the first column apply. For BS capable of multi-band operation the exclusions and conditions in the Note column of Table 6.6.4.5.4-1 apply for each supported operating band. For BS capable of multi-band operation where multiple bands are mapped on separate antenna connectors, the exclusions and conditions in the Note column of Table 6.6.4.5.4-1 apply for the operating band supported at that antenna connector.

# Table 6.6.4.5.4-1: BS Spurious emissions limits for E-UTRA BS for co-existence with systems operating in other frequency bands

System type for E-UTRA to co-exist with	Frequency range for co-existence requirement	Maximu m Level	Measurement Bandwidth	Note
GSM900	921 - 960 MHz	-57 dBm	100 kHz	This requirement does not apply to E-UTRA BS operating in band 8
	876 - 915 MHz	-61 dBm	100 kHz	For the frequency range 880-915 MHz, this requirement does not apply to E-UTRA BS operating in band 8, since it is already covered by the requirement in subclause 6.6.4.5.3.
DCS1800	1805 - 1880 MHz	-47 dBm	100 kHz	This requirement does not apply to E-UTRA BS operating in band 3.
	1710 - 1785 MHz	-61 dBm	100 kHz	This requirement does not apply to E-UTRA BS operating in band 3, since it is already covered by the requirement in subclause 6.6.4.5.3.
PCS1900	1930 - 1990 MHz	-47 dBm	100 kHz	This requirement does not apply to E-UTRA BS operating in frequency band 2, band 25 or band 36.
	1850 - 1910 MHz	-61 dBm	100 kHz	This requirement does not apply to E-UTRA BS operating in frequency band 2 or 25, since it is already covered by the requirement in subclause 6.6.4.5.3. This requirement does not apply to E-UTRA BS operating in frequency band 35.
GSM850 or CDMA850	869 - 894 MHz	-57 dBm	100 kHz	This requirement does not apply to E-UTRA BS operating in frequency band 5 or 26. This requirement applies to E-UTRA BS operating in Band 27 for the frequency range 879-894 MHz.
	824 - 849 MHz	-61 dBm	100 kHz	This requirement does not apply to E-UTRA BS operating in frequency band 5 or 26, since it is already covered by the requirement in subclause 6.6.4.5.3. For E-UTRA BS operating in Band 27, it applies 3 MHz below the Band 27 downlink operating band.
UTRA FDD Band I or	2110 - 2170 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 1,
E-UTRA Band 1	1920 - 1980 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 1, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band II or	1930 - 1990 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 2 or 25.
E-UTRA Band 2	1850 - 1910 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 2 or 25, since it is already covered by the requirement in subclause 6.6.4.5.3
UTRA FDD Band III or E-UTRA Band 3	1805 - 1880 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 3.
5	1710 - 1785 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 3 or 9, since it is already covered by the requirement in subclause 6.6.4.5.3. For E-UTRA BS operating in band 9, it applies for 1710 MHz to 1749.9 MHz and 1784.9 MHz to 1785 MHz, while the rest is covered in sub-clause 6.6.4.5.3.
UTRA FDD Band IV or	2110 - 2155 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 4 or 10
E-UTRA Band 4	1710 - 1755 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 4 or 10, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band V or E-UTRA Band 5	869 - 894 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 5 or 26. This requirement applies to E-UTRA BS operating in Band 27 for the frequency range 879-894 MHz.
	824 - 849 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 5 or 26, since it is already covered by the requirement in subclause 6.6.4.5.3. For E-UTRA BS operating in Band 27, it applies 3 MHz below the Band 27 downlink operating band.

UTRA FDD Band VI, XIX or	860 - 890 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 6, 18, 19.
E-UTRA Band 6, 18, 19	815 - 830 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 18, since it is already covered by the requirement in subclause 6.6.4.5.3.
	830 - 845 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 6, 19, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band VII or	2620 - 2690 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 7.
E-UTRA Band 7	2500 - 2570 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 7, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band VIII or	925 - 960 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 8.
E-UTRA Band 8	880 - 915 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 8, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band IX or E-UTRA Band	1844.9 - 1879.9 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 3 or 9.
9	1749.9 - 1784.9 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 3 or 9, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band X or	2110 - 2170 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 4 or 10
E-UTRA Band 10	1710 - 1770 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 10, since it is already covered by the requirement in subclause 6.6.4.5.3. For E-UTRA BS operating in Band 4, it applies for 1755 MHz to 1770 MHz, while the rest is covered in sub-clause 6.6.4.5.3.
UTRA FDD Band XI or XXI	1475.9 - 1510.9 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 11 or 21
E-UTRA Band 11 or 21	1427.9 - 1447.9 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 11, since it is already covered by the requirement in subclause 6.6.4.5.3.
	1447.9 - 1462.9 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 21, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band XII or	729 - 746 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 12.
E-UTRA Band 12	699 - 716 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 12, since it is already covered by the requirement in subclause 6.6.4.5.3. For E-UTRA BS operating in Band 29, it applies 1 MHz below the Band 29 downlink operating band (Note 6)
UTRA FDD Band XIII or	746 - 756 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 13.
E-UTRA Band 13	777 - 787 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 13, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band XIV or	758 - 768 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 14.
E-UTRA Band 14	788 - 798 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 14, since it is already covered by the requirement in subclause 6.6.4.5.3.
E-UTRA Band 17	734 - 746 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 17.
	704 - 716 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 17, since it is already covered by the requirement in subclause 6.6.4.5.3. For E-UTRA BS operating in Band 29, it applies 1 MHz below the Band 29 downlink operating band (Note 6)
UTRA FDD Band XX or	791 - 821 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 20.

E-UTRA Band 20	832 - 862 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS operating in band 20, since it is already covered by the
UTRA FDD	3510 – 3590 MHz	-52 dBm	1 MHz	requirement in subclause 6.6.4.5.3. This requirement does not apply to E-UTRA BS
Band XXII or				operating in band 22 or 42.
E-UTRA Band	3410 – 3490 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS
22				operating in band 22, since it is already covered by the
				requirement in subclause 6.6.4. 5.3. This requirement
				does not apply to E-UTRA BS operating in Band 42
E-UTRA Band	2180 - 2200 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS
23				operating in band 23.
	2000 - 2020 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS
				operating in band 23, since it is already covered by the
				requirement in subclause 6.6.4.5.3. This requirement
				does not apply to BS operating in Bands 2 or 25,
				where the limits are defined separately.
	2000 – 2010 MHz	-30 dBm	1 MHz	This requirement only applies to E-UTRA BS operating
	2010 – 2020 MHz	-49 dBm	1 MHz	in Band 2 or Band 25. This requirement applies
	2010 2020 10112	io abiii	1 101112	starting 5 MHz above the Band 25 downlink operating
				band. (Note 4)
E-UTRA Band	1525 – 1559 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS
24	1020 - 1000 Will 12	-52 ubm	1 1011 12	operating in band 24.
24	1626.5 - 1660.5	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS
		-49 ubiii		
	MHz			operating in band 24, since it is already covered by the
	4000 4005 MUL-		4 1411-	requirement in subclause 6.6.4.5.3.
UTRA FDD	1930 - 1995 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS
Band XXV or		10.15		operating in band 2 or 25
E-UTRA Band	1850 - 1915 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS
25				operating in band 25, since it is already covered by the
				requirement in subclause 6.6.4.5.3. For E-UTRA BS
				operating in Band 2, it applies for 1910 MHz to
				1915 MHz, while the rest is covered in sub-clause
				6.6.4.5.3.
UTRA FDD	859 – 894 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS
Band XXVI or				operating in band 5 or 26. This requirement applies to
E-UTRA Band				E-UTRA BS operating in Band 27 for the frequency
26				range 879-894 MHz.
	814 – 849 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS
				operating in band 26, since it is already covered by the
				requirement in subclause 6.6.5.3. For E-UTRA BS
				operating in Band 5, it applies for 814 MHz to
				824 MHz, while the rest is covered in sub-clause 6.6.4.
				5.3. For E-UTRA BS operating in Band 27, it applies
				3 MHz below the Band 27 downlink operating band.
E-UTRA Band	852 – 869 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS
27				operating in Band 5, 26 or 27.
	807 – 824 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS
				operating in Band 27, since it is already covered by
				the requirement in subclause 6.6.4.5.3. For E-UTRA
				BS operating in Band 26, it applies for 807 MHz to
				814 MHz, while the rest is covered in sub-clause
				6.6.4.5.3. This requirement also applies to E-UTRA BS
				operating in Band 28, starting 4 MHz above the Band
				28 downlink operating band (Note 5).
E-UTRA Band	758 - 803 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS
28		-92 UDIII		
20			4 NALI-	operating in band 28 or 44.
	703 - 748 MHz	-49 dBm	1 MHz	This requirement does not apply to E-UTRA BS
				operating in band 28, since it is already covered by the
				requirement in subclause 6.6.4.5.3. This requirement
	747 700 1411		4 1411	does not apply to E-UTRA BS operating in Band 44.
E-UTRA Band	717 – 728 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS
29				operating in Band 29
UTRA TDD	1900 – 1920 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS
Band a) or E-				operating in Band 33.
UTRA Band 33				
UTRA TDD	2010 – 2025 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS
Band a) or E-				operating in Band 34.
UTRA Band 34				-

UTRA TDD	1850 – 1910 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS
Band b) or E-				operating in Band 35.
UTRA Band 35				
UTRA TDD	1930 – 1990 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS
Band b) or E-				operating in Band 2 and 36.
UTRA Band 36				
UTRA TDD	1910 – 1930 MHz	-52 dBm	1 MHz	This is not applicable to E-UTRA BS operating in Band
Band c) or E-				37. This unpaired band is defined in ITU-R M.1036,
UTRA Band 37				but is pending any future deployment.
UTRA TDD	2570 – 2620 MHz	-52 dBm	1 MHz	This requirement does not apply to E-UTRA BS
Band d) or E-				operating in Band 38.
UTRA Band 38				
UTRA TDD	1880 – 1920MHz	-52 dBm	1 MHz	This is not applicable to E-UTRA BS operating in Band
Band f) or E-				39.
UTRA Band 39				
UTRA TDD	2300 – 2400MHz	-52 dBm	1 MHz	This is not applicable to E-UTRA BS operating in Band
Band e) or E-				40.
UTRA Band 40				
E-UTRA Band	2496 – 2690 MHz	-52 dBm	1 MHz	This is not applicable to E-UTRA BS operating in Band
41				41.
E-UTRA Band	3400 – 3600 MHz	-52 dBm	1 MHz	This is not applicable to E-UTRA BS operating in Band
42				42 or 43.
E-UTRA Band	3600 – 3800 MHz	-52 dBm	1 MHz	This is not applicable to E-UTRA BS operating in Band
43				42 or 43.
E-UTRA Band	703 - 803 MHz	-52 dBm	1 MHz	This is not applicable to E-UTRA BS operating in Band
44				28 or 44
NOTE 4: This r	equirement does not	apply to a	Band 2 E-UTRA	BS of an earlier release. In addition, it does not apply to
				a strong die stange 04 Desemption 0040 withigh is yng greedd dite

an E-UTRA Band 2 BS from an earlier release manufactured before 31 December, 2012, which is upgraded to support Rel-10 features, where the upgrade does not affect existing RF parts of the radio unit related to this requirement.

- NOTE 1: As defined in the scope for spurious emissions in this clause, except for the cases where the noted requirements apply to a BS operating in Band 25, Band 27, Band 28 or Band 29, the co-existence requirements in Table 6.6.4.5.4-1 do not apply for the 10 MHz frequency range immediately outside the downlink operating band (see Table 5.5-1). Emission limits for this excluded frequency range may be covered by local or regional requirements.
- NOTE 2: Table 6.6.4.5.4-1 assumes that two operating bands, where the frequency ranges in Table 5.5-1 would be overlapping, are not deployed in the same geographical area. For such a case of operation with overlapping frequency arrangements in the same geographical area, special co-existence requirements may apply that are not covered by the 3GPP specifications.
- NOTE 3: TDD base stations deployed in the same geographical area, that are synchronized and use the same or adjacent operating bands can transmit without additional co-existence requirements. For unsynchronized base stations, special co-existence requirements may apply that are not covered by the 3GPP specifications.
- NOTE 5: For E-UTRA Band 28 BS, specific solutions may be required to fulfil the spurious emissions limits for E-UTRA BS for co-existence with E-UTRA Band 27 UL operating band.
- NOTE 6: For E-UTRA Band 29 BS, specific solutions may be required to fulfil the spurious emissions limits for E-UTRA BS for co-existence with UTRA Band XII or E-UTRA Band 12 UL operating band or E-UTRA Band 17 UL operating band.

The power of any spurious emission shall not exceed the limits of Table 6.6.4.5.4-1a for a Home BS where requirements for co-existence with a Home BS type listed in the first column apply.

# Table 6.6.4.5.4-1a: Home BS Spurious emissions limits for co-existence with Home BS operating in<br/>other frequency bands

Type of coexistence BS	Frequency range for co- location requirement	Maximum Level	Measurement Bandwidth	Note
UTRA FDD Band I or E- UTRA Band 1	1920 - 1980 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 1, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band II or E- UTRA Band 2	1850 - 1910 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 2 or 25, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band III or E- UTRA Band 3	1710 - 1785 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 3, since it is already covered by the requirement in subclause 6.6.4.5.3. For Home BS operating in band 9, it applies for 1710 MHz to 1749.9 MHz and 1784.9 MHz to 1785 MHz, while the rest is covered in sub-clause 6.6.4.5.3.
UTRA FDD Band IV or E- UTRA Band 4	1710 - 1755 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 4 or 10, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band V or E- UTRA Band 5	824 - 849 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 5 or 26, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band VI, XIX or E-UTRA Band 6, 18, 19	815 - 830 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 18, since it is already covered by the requirement in subclause 6.6.4.5.3.
	830 - 845 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 6, 19, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band VII or E- UTRA Band 7	2500 - 2570 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 7, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band VIII or E-UTRA Band 8	880 - 915 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 8, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band IX or E- UTRA Band 9	1749.9 - 1784.9 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 3 or 9, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band X or E- UTRA Band 10	1710 - 1770 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 10, since it is already covered by the requirement in subclause 6.6.4.5.3. For Home BS operating in Band 4, it applies for 1755 MHz to 1770 MHz, while the rest is covered in sub-clause 6.6.4.5.3.
UTRA FDD Band XI, XXI or E-UTRA Band 11, 21	1427.9 - 1447.9 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 11, since it is already covered by the requirement in subclause 6.6.4.5.3.
	1447.9 - 1462.9 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 21, since it is already covered by the requirement in subclause 6.6.4.5.3.

UTRA FDD Band XII or E-UTRA Band 12	699 - 716 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 12, since it is already covered by the requirement in subclause 6.6.4.5.3. For Home BS operating in Band 29, it applies 1 MHz below the Band 29 downlink operating band (Note 5)
UTRA FDD Band XIII or E-UTRA Band 13	777 - 787 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 13, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band XIV or E-UTRA Band 14	788 - 798 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 14, since it is already covered by the requirement in subclause 6.6.4.5.3.
E-UTRA Band 17	704 - 716 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 17, since it is already covered by the requirement in subclause 6.6.4.5.3. For Home BS operating in Band 29, it applies 1 MHz below the Band 29 downlink operating band (Note 5)
UTRA FDD Band XX or E- UTRA Band 20	832 - 862 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 20, since it is already covered by the requirement in subclause 6.6.4.5.3.
UTRA FDD Band XXII or E-UTRA Band 22	3410 - 3490 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 22, since it is already covered by the requirement in sub-clause 6.6.4. 5.3. This requirement does not apply to Home BS operating in Band 42
E-UTRA Band 23	2000 - 2020 MHz	TBD	TBD	This requirement does not apply to Home BS operating in band 23, since it is already covered by the requirement in sub-clause 6.6.4.5.3.
E-UTRA Band 24	1626.5 – 1660.5 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 24, since it is already covered by the requirement in sub-clause 6.6.4.5.3.
UTRA FDD Band XXV or E-UTRA Band 25	1850 - 1915 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 25, since it is already covered by the requirement in sub-clause 6.6.4.5.3.
UTRA FDD Band XXVI or E-UTRA Band 26	814 - 849 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 26, since it is already covered by the requirement in sub-clause 6.6.4. 5.3. For Home BS operating in Band 5, it applies for 814 MHz to 824 MHz, while the rest is covered in sub-clause 6.6.4.2.
E-UTRA Band 27	807 - 824 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 27, since it is already covered by the requirement in sub-clause 6.6.4.5.3. For Home BS operating in Band 26, it applies for 807 MHz to 814 MHz, while the rest is covered in sub-clause 6.6.4.5.3. This requirement also applies to E-UTRA BS operating in Band 28, starting 4 MHz above the Band 28 downlink operating band (Note 4).

E-UTRA Band 28	703 – 748 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in band 28, since it is already covered by the requirement in sub-clause 6.6.4.5.3. This requirement does not apply to Home BS operating in Band 44.
UTRA TDD Band a) or E- UTRA Band 33	1900 - 1920 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in Band 33.
UTRA TDD Band a) or E- UTRA Band 34	2010 - 2025 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in Band 34.
UTRA TDD Band b) or E- UTRA Band 35	1850 - 1910 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in Band 35.
UTRA TDD Band b) or E- UTRA Band 36	1930 - 1990 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in Band 2 and 36.
UTRA TDD Band c) or E- UTRA Band 37	1910 - 1930 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in Band 37. This unpaired band is defined in ITU-R M.1036, but is pending any future deployment.
UTRA TDD Band d) or E- UTRA Band 38	2570 - 2620 MHz	-71 dBm	100 kHz	This requirement does not apply to Home BS operating in Band 38.
UTRA TDD Band f) or E- UTRA Band 39	1880 - 1920MHz	-71 dBm	100 kHz	This is not applicable to Home BS operating in Band 39.
UTRA TDD Band e) or E- UTRA Band 40	2300 - 2400MHz	-71 dBm	100 kHz	This is not applicable to Home BS operating in Band 40.
E-UTRA Band 41	2496 – 2690 MHz	-71 dBm	100 kHz	This is not applicable to Home BS operating in Band 41.
E-UTRA Band 42	3400 - 3600 MHz	-71 dBm	100 kHz	This is not applicable to Home BS operating in Band 42 or 43
E-UTRA Band 43	3600 - 3800 MHz	-71 dBm	100 kHz	This is not applicable to Home BS operating in Band 42 or 43
E-UTRA Band 44	703 - 803 MHz	-71 dBm	100 kHz	This is not applicable to Home BS operating in Band 28 or 44

- NOTE 1: As defined in the scope for spurious emissions in this clause, except for the cases where the noted requirements apply to a BS operating in Band 27, Band 28 or Band 29, the coexistence requirements in Table 6.6.4.5.4-1a do not apply for the 10 MHz frequency range immediately outside the Home BS transmit frequency range of a downlink operating band (see Table 5.5-1). Emission limits for this excluded frequency range may be covered by local or regional requirements.
- NOTE 2: Table 6.6.4.5.4-1a assumes that two operating bands, where the frequency ranges in Table 5.5-1 would be overlapping, are not deployed in the same geographical area. For such a case of operation with overlapping frequency arrangements in the same geographical area, special co-existence requirements may apply that are not covered by the 3GPP specifications.
- NOTE 3: TDD base stations deployed in the same geographical area, that are synchronized and use the same or adjacent operating bands can transmit without additional co-existence requirements. For unsynchronized base stations, special co-existence requirements may apply that are not covered by the 3GPP specifications.
- NOTE 4: For E-UTRA Band 28 BS, specific solutions may be required to fulfil the spurious emissions limits for E-UTRA BS for co-existence with E-UTRA Band 27 UL operating band. NOTE 5: For E-UTRA Band 29 BS, specific solutions may be required to fulfil the spurious emissions limits for E-UTRA BS for co-existence with UTRA Band XII or E-UTRA Band 12 UL operating band or E-UTRA Band 17 UL operating band.

The following requirement may be applied for the protection of PHS. This requirement is also applicable at specified frequencies falling between 10 MHz below the lowest BS transmitter frequency of the downlink operating band and 10 MHz above the highest BS transmitter frequency of the downlink operating band (see Table 5.5-1).

The power of any spurious emission shall not exceed:

#### Table 6.6.4.5.4-2: E-UTRA BS Spurious emissions limits for BS for co-existence with PHS

Frequency range	Maximum Level	Measurement Bandwidth	Note
1884.5 - 1915.7 MHz	-41 dBm	300 kHz	Applicable when co-existence with PHS system operating in 1884.5 -1915.7MHz

The following requirement shall be applied to BS operating in Bands 13 and 14 to ensure that appropriate interference protection is provided to 700 MHz public safety operations. This requirement is also applicable at the frequency range from 10 MHz below the lowest frequency of the BS transmitter operating band up to 10 MHz above the highest frequency of the BS transmitter operating band. The power of any spurious emission shall not exceed:

Operating Band	Band	Maximum Level	Measurement Bandwidth	Note
13	763 - 775 MHz	-46 dBm	6.25 kHz	
13	793 - 805 MHz	-46 dBm	6.25 kHz	
14	769 - 775 MHz	-46 dBm	6.25 kHz	
14	799 - 805 MHz	-46 dBm	6.25 kHz	

#### Table 6.6.4.5.4-4: Void

The following requirement shall be applied to BS operating in Band 26 to ensure that appropriate interference protection is provided to 800 MHz public safety operations. This requirement is also applicable at the frequency range from 10 MHz below the lowest frequency of the BS downlink operating band up to 10 MHz above the highest frequency of the BS downlink operating band.

The power of any spurious emission shall not exceed:

#### Table 6.6.4.5.4-5: BS Spurious emissions limits for protection of 800 MHz public safety operations

Operating Band	Frequency range	Maximum Level	Measurement Bandwidth	Note
26	851 - 859 MHz	-13 dBm	100 kHz	Applicable for offsets > 37.5kHz from the channel edge

The following requirement may apply to E-UTRA BS operating in Band 41 in certain regions. This requirement is also applicable at the frequency range from 10 MHz below the lowest frequency of the BS downlink operating band up to 10 MHz above the highest frequency of the BS downlink operating band.

The power of any spurious emission shall not exceed:

#### Table 6.6.4.5.4-6: Additional E-UTRA BS Spurious emissions limits for Band 41

Frequency range	Maximum Level	Measurement Bandwidth	Note		
2505MHz – 2535MHz	-42dBm	1 MHz			
2535MHz – 2630MHz	-22dBm	1 MHz	Applicable at offsets ≥ 250% of channel bandwidth from carrier frequency		
2630MHz – 2655MHz	-30dBm	1 MHz			
NOTE: This requirement applies for 10 or 20 MHz E-UTRA carriers allocated within 2545-2575MHz.					

#### 6.6.4.5.5 Co-location with other base stations

These requirements may be applied for the protection of other BS receivers when GSM900, DCS1800, PCS1900, GSM850, CDMA850, UTRA FDD, UTRA TDD and/or E-UTRA BS are co-located with an E-UTRA BS.

The requirements assume a 30 dB coupling loss between transmitter and receiver and are based on co-location with base stations of the same class.

The power of any spurious emission shall not exceed the limits of Table 6.6.4.5.5-1 for a Wide Area BS where requirements for co-location with a BS type listed in the first column apply. For BS capable of multi-band operation, the exclusions and conditions in the Note column of Table 6.6.4.5.5-1 apply for each supported operating band. For BS capable of multi-band operation where multiple bands are mapped on separate antenna connectors, the exclusions and conditions in the Note column of Table 6.6.4.5.5-1 apply for the operating band supported at that antenna connector.

Type of co-located BS	Frequency range for co-	Maximum	Measurement	Note
	location requirement	Level	Bandwidth	
Macro GSM900	876-915 MHz	-98 dBm	100 kHz	
Macro DCS1800	1710 - 1785 MHz	-98 dBm	100 kHz	
Macro PCS1900	1850 - 1910 MHz	-98 dBm	100 kHz	
Macro GSM850 or	824 - 849 MHz	-98 dBm	100 kHz	
CDMA850				
WA UTRA FDD Band I or	1920 - 1980 MHz	-96 dBm	100 kHz	
E-UTRA Band 1				
WA UTRA FDD Band II	1850 - 1910 MHz	-96 dBm	100 kHz	
or E-UTRA Band 2				
WA UTRA FDD Band III	1710 - 1785 MHz	-96 dBm	100 kHz	
or E-UTRA Band 3				
WA UTRA FDD Band IV	1710 - 1755 MHz	-96 dBm	100 kHz	
or E-UTRA Band 4				
WA UTRA FDD Band V	824 - 849 MHz	-96 dBm	100 kHz	
or E-UTRA Band 5			400.111	
WA UTRA FDD Band VI,	830 - 845 MHz	-96 dBm	100 kHz	
XIX or				
E-UTRA Band 6, 19	0500 0570 MU	00 10	400 111-	
WA UTRA FDD Band VII	2500 - 2570 MHz	-96 dBm	100 kHz	
or E-UTRA Band 7	880 - 915 MHz	06 dDm	100 1/11-	
WA UTRA FDD Band VIII	880 - 915 MHZ	-96 dBm	100 kHz	
or E-UTRA Band 8 WA UTRA FDD Band IX	1749.9 - 1784.9 MHz	-96 dBm	100 kHz	
or E-UTRA Band 9	1749.9 - 1784.9 MHZ	-90 UDIII		
WA UTRA FDD Band X	1710 - 1770 MHz	-96 dBm	100 kHz	
or E-UTRA Band 10		-30 abiii		
WA UTRA FDD Band XI	1427.9 –1447.9 MHz	-96 dBm	100 kHz	
or E-UTRA Band 11		SO GDIII		
WA UTRA FDD Band XII	699 - 716 MHz	-96 dBm	100 kHz	
or				
E-UTRA Band 12				
WA UTRA FDD Band XIII	777 - 787 MHz	-96 dBm	100 kHz	
or				
E-UTRA Band 13				
WA UTRA FDD Band XIV	788 - 798 MHz	-96 dBm	100 kHz	
or				
E-UTRA Band 14				
WA E-UTRA Band 17	704 - 716 MHz	-96 dBm	100 kHz	
WA E-UTRA Band 18	815 - 830 MHz	-96 dBm	100 kHz	
WA UTRA FDD Band XX	832 - 862 MHz	-96 dBm	100 kHz	
E-UTRA Band 20				
WA E-UTRA Band 24	1626.5 – 1660.5 MHz	-96 dBm	100 kHz	
WA UTRA FDD Band XXI	1447.9 – 1462.9 MHz	-96 dBm	100 kHz	
or				
E-UTRA Band 21	2440 2400 MUL	00 -10	400 515	This is a st
WA UTRA FDD Band	3410 – 3490 MHz	-96 dBm	100 kHz	This is not
XXII or E-UTRA Band 22				applicable to E- UTRA BS operating
				in Band 42
WA E-UTRA Band 23	2000 - 2020 MHz	-96 dBm	100 kHz	
WA E-UTRA Band 23 WA UTRA FDD Band	814 – 849 MHz	-96 dBm	100 kHz	
XXVI or		-30 0011		
E-UTRA Band 26				
WA E-UTRA Band 27	807 - 824 MHz	-96 dBm	100 kHz	

Table 6.6.4.5.5-1: BS Spurious emissions limits for Wide	Area BS co-located with another BS
--	------------------------------------

WA E-UTRA Band 28	703 – 748 MHz	-96 dBm	100 kHz	This is not
				applicable to E-
				UTRA BS operating
	4000 4000 MUL	00 - 10	400 111-	in Band 44
WA UTRA TDD Band a) or E-UTRA Band 33	1900 - 1920 MHz	-96 dBm	100 kHz	This is not
OF E-OTRA Band 33				applicable to E-
				UTRA BS operating in Band 33
WA UTRA TDD Band a)	2010 - 2025 MHz	-96 dBm	100 kHz	This is not
or E-UTRA Band 34	2010 - 2023 10112	-90 ubiii	TOO KI IZ	applicable to E-
				UTRA BS operating
				in Band 34
WA UTRA TDD Band b)	1850 – 1910 MHz	-96 dBm	100 kHz	This is not
or E-UTRA Band 35		00 02		applicable to E-
				UTRA BS operating
				in Band 35
WA UTRA TDD Band b)	1930 - 1990 MHz	-96 dBm	100 kHz	This is not
or E-UTRA Band 36				applicable to E-
				UTRA BS operating
				in Band 2 and 36
WA UTRA TDD Band c)	1910 - 1930 MHz	-96 dBm	100 kHz	This is not
or E-UTRA Band 37				applicable to E-
				UTRA BS operating
				in Band 37. This
				unpaired band is
				defined in ITU-R
				M.1036, but is
				pending any future
WA UTRA TDD Band d)	2570 – 2620 MHz	-96 dBm	100 kHz	deployment. This is not
or E-UTRA Band 38	2570 - 2020 WH 12	-90 ubiii	TOO KI IZ	applicable to E-
or E offict Band of				UTRA BS operating
				in Band 38.
WA UTRA TDD Band f)	1880 – 1920MHz	-96 dBm	100 kHz	This is not
or E-UTRA Band 39				applicable to E-
				UTRA BS operating
				in Band 33 and 39
WA UTRA TDD Band e)	2300 – 2400MHz	-96 dBm	100 kHz	This is not
or E-UTRA Band 40				applicable to E-
				UTRA BS operating
				in Band 40
WA E-UTRA Band 41	2496 – 2690 MHz	-96 dBm	100 kHz	This is not
				applicable to E-
				UTRA BS operating
	2400 2000 MUL-		100 111-	in Band 41
WA E-UTRA Band 42	3400 – 3600 MHz	-96 dBm	100 kHz	This is not
				applicable to E- UTRA BS operating
				in Band 42 or 43
WA E-UTRA Band 43	3600 – 3800 MHz	-96 dBm	100 kHz	This is not
		JUGDIN		applicable to E-
				UTRA BS operating
				in Band 42 or 43
WA E-UTRA Band 44	703 – 803 MHz	-96 dBm	100 kHz	This is not
		-		applicable to E-
				UTRA BS operating
				in Band 28 or 44
·I		•		•

The power of any spurious emission shall not exceed the limits of Table 6.6.4.5.5-2 for a Local Area BS where requirements for co-location with a BS type listed in the first column apply. For BS capable of multi-band operation, the exclusions and conditions in the Note column of Table 6.6.4.5.5-2 apply for each supported operating band. For BS capable of multi-band operation where multiple bands are mapped on separate antenna connectors, the exclusions and conditions in the Note column of Table 6.6.4.5.5-2 apply for the operating band supported at that antenna connector.

#### Table 6.6.4.5.5-2: BS Spurious emissions limits for Local Area BS co-located with another BS

Type of co-located BS	Frequency range for co-	Maximum	Measurement	Note
	location requirement	Level	Bandwidth	
Pico GSM900	876-915 MHz	-70 dBm	100 kHz	
Pico DCS1800	1710 - 1785 MHz	-80 dBm	100 kHz	
Pico PCS1900	1850 - 1910 MHz	-80 dBm	100 kHz	
Pico GSM850	824 - 849 MHz	-70 dBm	100 kHz	
LA UTRA FDD Band I or E- UTRA Band 1	1920 - 1980 MHz	-88 dBm	100 kHz	
LA UTRA FDD Band II or E-UTRA Band 2	1850 - 1910 MHz	-88 dBm	100 kHz	
LA UTRA FDD Band III or E-UTRA Band 3	1710 - 1785 MHz	-88 dBm	100 kHz	
LA UTRA FDD Band IV or E-UTRA Band 4	1710 - 1755 MHz	-88 dBm	100 kHz	
LA UTRA FDD Band V or E-UTRA Band 5	824 - 849 MHz	-88 dBm	100 kHz	
LA UTRA FDD Band VI, XIX or E-UTRA Band 6, 19	830 - 845 MHz	-88 dBm	100 kHz	
LA UTRA FDD Band VII or E-UTRA Band 7	2500 - 2570 MHz	-88 dBm	100 kHz	
LA UTRA FDD Band VIII or E-UTRA Band 8	880 - 915 MHz	-88 dBm	100 kHz	
LA UTRA FDD Band IX or E-UTRA Band 9	1749.9 - 1784.9 MHz	-88 dBm	100 kHz	
LA UTRA FDD Band X or E-UTRA Band 10	1710 - 1770 MHz	-88 dBm	100 kHz	
LA UTRA FDD Band XI or E-UTRA Band 11	1427.9 - 1447.9 MHz	-88 dBm	100 kHz	
LA UTRA FDD Band XII or E-UTRA Band 12	699 - 716 MHz	-88 dBm	100 kHz	
LA UTRA FDD Band XIII or E-UTRA Band 13	777 - 787 MHz	-88 dBm	100 kHz	
LA UTRA FDD Band XIV or E-UTRA Band 14	788 - 798 MHz	-88 dBm	100 kHz	
LA E-UTRA Band 17	704 - 716 MHz	-88 dBm	100 kHz	
LA E-UTRA Band 18	815 - 830 MHz	-88 dBm	100 kHz	
LA UTRA FDD Band XX or E-UTRA Band 20	832 - 862 MHz	-88 dBm	100 kHz	
LA UTRA FDD Band XXI or E-UTRA Band 21	1447.9 – 1462.9 MHz	-88 dBm	100 kHz	
LA UTRA FDD Band XXII or E-UTRA Band 22	3410 – 3490 MHz	-88 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 42
LA E-UTRA Band 23	2000 - 2020 MHz	-88 dBm	100 kHz	
LA E-UTRA Band 24	1626.5 – 1660.5 MHz	-88 dBm	100 kHz	
LA UTRA FDD Band XXV or E-UTRA Band 25	1850 – 1915 MHz	-88 dBm	100 kHz	
LA UTRA FDD Band XXVI or	814 – 849 MHz	-88 dBm	100 kHz	
E-UTRA Band 26 LA E-UTRA Band 27	807 - 824 MHz	-88 dBm	100 kHz	
LA E-UTRA Band 27	703 – 748 MHz	-88 dBm	100 KHz	This is not
				applicable to E- UTRA BS operating in Band 44
LA UTRA TDD Band a) or E-UTRA Band 33	1900 - 1920 MHz	-88 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 33
LA UTRA TDD Band a) or E-UTRA Band 34	2010 - 2025 MHz	-88 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 34

LA UTRA TDD Band b) or E-UTRA Band 35	1850 – 1910 MHz	-88 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 35
LA UTRA TDD Band b) or E-UTRA Band 36	1930 - 1990 MHz	-88 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 2 and 36
LA UTRA TDD Band c) or E-UTRA Band 37	1910 - 1930 MHz	-88 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 37. This unpaired band is defined in ITU-R M.1036, but is pending any future deployment.
LA UTRA TDD Band d) or E-UTRA Band 38	2570 – 2620 MHz	-88 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 38.
LA UTRA TDD Band f) or E-UTRA Band 39	1880 – 1920MHz	-88 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 33 and 39
LA UTRA TDD Band e) or E-UTRA Band 40	2300 – 2400MHz	-88 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 40
LA E-UTRA Band 41	2496 – 2690 MHz	-88 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 41
LA E-UTRA Band 42	3400 – 3600 MHz	-88 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 42 or 43
LA E-UTRA Band 43	3600 – 3800 MHz	-88 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 42 or 43
LA E-UTRA Band 44	703 – 803 MHz	-88 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 28 or 44

The power of any spurious emission shall not exceed the limits of Table 6.6.4.5.5-3 for a Medium Range BS where requirements for co-location with a BS type listed in the first column apply. For BS capable of multi-band operation, the exclusions and conditions in the Note column of Table 6.6.4.5.5-3 apply for each supported operating band. For BS capable of multi-band operation where multiple bands are mapped on separate antenna connectors, the exclusions and conditions in the Note column of Table 6.6.4.5.5-3 apply for the operating band supported at that antenna connector.

Type of co-located BS	Frequency range for co-	Maximum	Measurement	Note
	location requirement	Level	Bandwidth	
Micro/MR GSM900	876-915 MHz	-91 dBm	100 kHz	
Micro/MR DCS1800	1710 - 1785 MHz	-91 dBm	100 kHz	
Micro/MR PCS1900	1850 - 1910 MHz	-91 dBm	100 kHz	
Micro/MR GSM850	824 - 849 MHz	-91 dBm	100 kHz	
MR UTRA FDD Band I or	1920 - 1980 MHz	-91 dBm	100 kHz	
E-UTRA Band 1	4050 4040 MU		400 111-	
MR UTRA FDD Band II or E-UTRA Band 2	1850 - 1910 MHz	-91 dBm	100 kHz	
MR UTRA FDD Band III or E-UTRA Band 3	1710 - 1785 MHz	-91 dBm	100 kHz	
MR UTRA FDD Band IV or E-UTRA Band 4	1710 - 1755 MHz	-91 dBm	100 kHz	
MR UTRA FDD Band V or E-UTRA Band 5	824 - 849 MHz	-91 dBm	100 kHz	
MR UTRA FDD Band VI, XIX or E-UTRA Band 6, 19	830 - 850 MHz	-91 dBm	100 kHz	
MR UTRA FDD Band VII or E-UTRA Band 7	2500 - 2570 MHz	-91 dBm	100 KHz	
MR UTRA FDD Band VIII or E-UTRA Band 8	880 - 915 MHz	-91 dBm	100 KHz	
MR UTRA FDD Band IX or E-UTRA Band 9	1749.9 - 1784.9 MHz	-91 dBm	100 KHz	
MR UTRA FDD Band X or E-UTRA Band 10	1710 - 1770 MHz	-91 dBm	100 kHz	
MR UTRA FDD Band XI or E-UTRA Band 11	1427.9 - 1447.9 MHz	-91 dBm	100 kHz	
MR UTRA FDD Band XII or E-UTRA Band 12	699 - 716 MHz	-91 dBm	100 kHz	
MR UTRA FDD Band XIII or E-UTRA Band 13	777 - 787 MHz	-91 dBm	100 kHz	
MR UTRA FDD Band XIV or E-UTRA Band 14	788 - 798 MHz	-91 dBm	100 kHz	
MR E-UTRA Band 17	704 - 716 MHz	-91 dBm	100 kHz	
MR E-UTRA Band 18	815 - 830 MHz	-91 dBm	100 KHz	
MR UTRA FDD Band XX or E-UTRA Band 20	832 - 862 MHz	-91 dBm	100 KHz	
MR UTRA FDD Band XXI or E-UTRA Band 21	1447.9 - 1462.9 MHz	-91 dBm	100 KHz	
MR UTRA FDD Band XXII or E-UTRA Band 22	3410 – 3490 MHz	-91 dBm	100 kHz	This is not applicable to E- UTRA BS operating in Band 42
MR E-UTRA Band 23	2000 - 2020 MHz	-91 dBm	100 kHz	
MR E-UTRA Band 24	1626.5 – 1660.5 MHz	-91 dBm	100 KHz	
MR UTRA FDD Band XXV or E-UTRA Band 25	1850 – 1915 MHz	-91 dBm	100 kHz	
MR UTRA FDD Band XXVI or E-UTRA Band 26	814 – 849 MHz	-91 dBm	100 kHz	
MR E-UTRA Band 27	807 - 824 MHz	-91 dBm	100 kHz	
MR E-UTRA Band 28	703 – 748 MHz	-91 dBm	100 KHz	This is not applicable to E- UTRA BS operating in Band 44

#### Table 6.6.4.5.5-3: BS Spurious emissions limits for Medium range BS co-located with another BS

MR E-UTRA Band 33	1900 - 1920 MHz	-91 dBm	100 kHz	This is not
				applicable to E-
				UTRA BS operating
	0040 0005 141	04 15	400.111	in Band 33
MR E-UTRA Band 34	2010 - 2025 MHz	-91 dBm	100 kHz	This is not
				applicable to E-
				UTRA BS operating
	1050 1010 MU	0.4 /D	400111	in Band 34
MR E-UTRA Band 35	1850 – 1910 MHz	-91 dBm	100 kHz	This is not
				applicable to E-
				UTRA BS operating
	1930 - 1990 MHz	-91 dBm	100 kHz	in Band 35 This is not
MR E-UTRA Band 36	1930 - 1990 MHZ	-91 dBm	100 KHZ	
				applicable to E-
				UTRA BS operating
MD E LITDA Band 27	1010 1020 MU-	-91 dBm	100 kHz	in Band 2 and 36
MR E-UTRA Band 37	1910 - 1930 MHz	-91 UDIII		This is not applicable to E-
				UTRA BS operating
				in Band 37. This
				unpaired band is
				defined in ITU-R
				M.1036, but is
				pending any future
				deployment.
MR E-UTRA Band 38	2570 – 2620 MHz	-91 dBm	100 kHz	This is not
		or abiii	100 14 12	applicable to E-
				UTRA BS operating
				in Band 38.
MR E-UTRA Band 39	1880 – 1920MHz	-91 dBm	100 kHz	This is not
				applicable to E-
				UTRA BS operating
				in Band 33 and 39
MR E-UTRA Band 40	2300 – 2400MHz	-91 dBm	100 kHz	This is not
				applicable to E-
				UTRA BS operating
				in Band 40
MR E-UTRA Band 41	2496 – 2690 MHz	-91 dBm	100 kHz	This is not
				applicable to E-
				UTRA BS operating
				in Band 41
MR E-UTRA Band 42	3400 – 3600 MHz	-91 dBm	100 kHz	This is not
				applicable to E-
				UTRA BS operating
			400	in Band 42 or 43
MR E-UTRA Band 43	3600 – 3800 MHz	-91 dBm	100 kHz	This is not
				applicable to E-
				UTRA BS operating
	700 000 1411	04 15	400.111	in Band 42 or 43
MR E-UTRA Band 44	703 – 803 MHz	-91 dBm	100 kHz	This is not
				applicable to E-
				UTRA BS operating
				in Band 28 or 44

- NOTE 1: As defined in the scope for spurious emissions in this clause, the co-location requirements in Table 6.6.4.5.5-1 to Table 6.6.4.5.5-3 do not apply for the 10 MHz frequency range immediately outside the BS transmit frequency range of a downlink operating band (see Table 5.5-1). The current state-of-the-art technology does not allow a single generic solution for co-location with other system on adjacent frequencies for 30dB BS-BS minimum coupling loss. However, there are certain site-engineering solutions that can be used. These techniques are addressed in TR 25.942 [11].
- NOTE 2: Tables 6.6.4.5.5-1 to 6.6.4.5.5-3 assume that two operating bands, where the corresponding eNode B transmit and receive frequency ranges in Table 5.3-1 would be overlapping, are not deployed in the same geographical area. For such a case of operation with overlapping frequency arrangements in the same geographical area, special co-location requirements may apply that are not covered by the 3GPP specifications.

NOTE 3: Co-located TDD base stations that are synchronized and using the same or adjacent operating band can transmit without special co-locations requirements. For unsynchronized base stations, special co-location requirements may apply that are not covered by the 3GPP specifications.

## 6.7 Transmitter intermodulation

### 6.7.1 Definition and applicability

The transmitter intermodulation requirement is a measure of the capability of the transmitter to inhibit the generation of signals in its non linear elements caused by presence of the own transmit signal and an interfering signal reaching the transmitter via the antenna. The requirement applies during the transmitter ON period and the transmitter transient period.

For BS capable of multi-band operation where multiple bands are mapped on separate antenna connectors, the singleband requirements apply regardless of the interfering signals position relative to the inter RF bandwidth gap.

The transmit intermodulation level is the power of the intermodulation products when an E-UTRA signal of channel bandwidth 5 MHz as an interfering signal is injected into an antenna connector at a mean power level of 30 dB lower than that of the mean power of the wanted signal.

The wanted signal is E-UTRA single carrier, or multi-carrier, or multiple contiguously aggregated carriers, for both contiguous and non-contiguous spectrum operation. The interfering signal centre frequency offset from the wanted signal carrier centre frequency shall be as in Table 6.7.1-1.

#### Table 6.7.1-1 Interfering signal centre frequency offset from wanted signal carrier centre frequency

Parameter	Value	
Interfering signal centre frequency offset from	± 2.5 MHz	
the lower (upper) edge of the wanted signal or	± 7.5 MHz	
edge of sub-block inside a sub-block gap	± 12.5 MHz	
NOTE 1: Interfering signal positions that are partially or completely outside of the downlink operating band of		
base station are excluded from the requirement, unless the interfering signal positions fall within th		
frequency range of adjacent downlink operating bands in the same geographical area.		
NOTE 2: NOTE 1 is not applied in Band 1, 3, 8,	9, 11, 18, 19, 21, 28, 34 in certain regions.	

The wanted signal channel bandwidth  $BW_{Channel}$  shall be the maximum channel bandwidth supported by the base station.

The requirements shall apply whatever the type of transmitter considered (single carrier, multi-carrier and/or CA). It applies for all transmission modes foreseen by the manufacturer's specification.

In case that none of the interfering signal positions according to the conditions of Table 6.7.1-1 is applicable, a wanted signal channel bandwidth  $BW_{Channel}$  less than the maximum channel bandwidth supported by the base station shall be selected so that at least one applicable interfering signal position according to Table 6.7.1-1 is obtained. If the BS does not support any channel bandwidths less than the maximum supported bandwidth, an interfering signal outside or partly outside the downlink operating band shall used.

### 6.7.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 6.7.1.

### 6.7.2A Additional requirement for Band 41

The additional requirement for Band 41 in certain regions is in TS 36.104 [2] subclause 6.7.2.

### 6.7.3 Test purpose

The test purpose is to verify the ability of the BS transmitter to restrict the generation of intermodulation products in its non-linear elements caused by presence of the wanted signal and an interfering signal reaching the transmitter via the antenna to below specified levels.

### 6.7.4 Method of test

#### 6.7.4.1 Initial conditions

Test environment: normal; see Annex D.2.

RF channels to be tested for single carrier: B, M and T; see subclause 4.7.

RF bandwidth positions to be tested for multi-carrier and/or CA: B<sub>RFBW</sub>, M<sub>RFBW</sub> and T<sub>RFBW</sub>; see subclause 4.7.1.

Connect the signal analyzer to the base station antenna connector as shown in Annex I.1.2.

#### 6.7.4.2 Procedures

1) For a BS declared to be capable of single carrier operation only, generate the wanted signal according to E-TM1.1 at manufacturer"s declared rated output power.

For a BS declared to be capable of multi-carrier and/or CA operation, set the base station to transmit according to E-TM1.1 on all carriers configured using the applicable test configuration and corresponding power setting specified in sub-clause 4.10 and 4.11.

- 2) Generate the interfering signal according to E-TM1.1, with 5 MHz channel bandwidth and a centre frequency offset according to the conditions of Table 6.7.1-1 but exclude interference frequencies that are outside of the allocated downlink operating band or interference frequencies that are not completely within the sub-block gap.
- 3) Adjust ATT1 so that level of the E-UTRA modulated interfering signal is as defined in subclause 6.7.5.
- 4) Perform the Out-of-band emission tests as specified in subclauses 6.6.2 and 6.6.3, for all third and fifth order intermodulation products which appear in the frequency ranges defined in subclauses 6.6.2 and 6.6.3. The width of the intermodulation products shall be taken into account.
- 5) Perform the Transmitter spurious emissions test as specified in subclause 6.6.4, for all third and fifth order intermodulation products which appear in the frequency ranges defined in subclause 6.6.4. The width of the intermodulation products shall be taken into account.
- 6) Verify that the emission level does not exceed the required level with the exception of interfering signal frequencies.
- 7) Repeat the test for the remaining interfering signal centre frequency offset s according to the conditions of Table 6.7.1-1.

In addition, for a multi-band capable BS, the following steps shall apply:

- 8) For multi-band capable BS and single band tests, repeat the steps above per involved band where single band test configurations and test models shall apply with no carrier activated in the other band.
- 9) For multi-band capable BS with separate antenna connector, the antenna connector not being under test shall be terminated.
- NOTE: The third order intermodulation products are centred at 2F1±F2 and 2F2±F1. The fifth order intermodulation products are centred at 3F1±2F2, 3F2±2F1, 4F1±F2, and 4F2±F1 where F1 represents the wanted signal centre frequency and F2 represents the interfering signal centre frequency. The widths of intermodulation products are:
  - $(n*BW_{Channel} + m*5MHz)$  for the nF1±mF2 products
  - $(n*5MHz + m*BW_{Channel})$  for the nF2±mF1 products

## 6.7.5 Test Requirements

In the frequency range relevant for this test, the transmit intermodulation level shall not exceed the out-of-band emission requirements of subclauses 6.6.2 and 6.6.3 and transmitter spurious emissions requirements of subclause 6.6.4 in the presence of a E-UTRA modulated interfering signal with a mean power 30 dB below the mean power of the wanted signal.

The requirement is always applicable outside the Base Station RF bandwidth or maximum radio bandwidth. The interfering signal offset is defined relative to the lower (upper) or maximum radio bandwidth edges.

For a BS operating in non-contiguous spectrum, the requirement is also applicable inside a sub-block gap for interfering signal offsets where the interfering signal falls completely within the sub-block gap. The interfering signal offset is defined relative to the sub-block edges.

For a BS capable of multi-band operation, the requirement applies relative to the RF bandwidth edges of each supported operating band. In case the inter RF bandwidth gap is less than 15 MHz, the requirement in the gap applies only for interfering signal offsets where the interfering signal falls completely within the inter RF bandwidth gap.

The measurements for out-of-band emissions and spurious emission requirements due to intermodulation can be limited to the frequency ranges of all third and fifth order intermodulation products, excluding the channel bandwidths of the wanted and interfering signals.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test is defined in Annex G. The explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

### 6.7.6 Additional test requirements for Band 41

In the frequency range relevant for this test, the transmitter intermodulation level shall not exceed the maximum levels according to Table 6.6.3.5.3-7 in the presence of a wanted signal and an interfering signal according to Table 6.7.2-1 in TS 36.104 [2] for a BS operating in Band 41. The measurement may be limited to frequencies on which third and fifth order intermodulation products appear, considering the width of these products.

7 Receiver characteristics

## 7.1 General

General test conditions for receiver tests are given in Clause 4, including interpretation of measurement results and configurations for testing. BS configurations for the tests are defined in Clause 4.5, while Annex H provides an informative description of E-UTRAN test cases.

Unless otherwise stated the requirements in clause 7 apply during the base station receive period.

The throughput requirements defined for the receiver characteristics in this clause do not assume HARQ transmissions.

When the BS is configured to receive multiple carriers, all the throughput requirements are applicable for each received carrier. For ACS, blocking and intermodulation characteristics, the negative offsets of the interfering signal apply relative to the lower edge and positive offsets of the interfering signal apply relative to the upper edge.

## 7.2 Reference sensitivity level

### 7.2.1 Definition and applicability

The reference sensitivity power level  $P_{REFSENS}$  is the minimum mean power received at the antenna connector at which a throughput requirement shall be met for a specified reference measurement channel.

The test is set up according to Annex I.2.1 and performed without interfering signal power applied to the BS antenna connector. For duplex operation, the measurement configuration principle is indicated for one duplex branch in Annex I.2.1. The reference point for signal power is at the input of the receiver (antenna connector).

### 7.2.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 7.2.1.

### 7.2.3 Test purpose

To verify that at the BS Reference sensitivity level the throughput requirement shall be met for a specified reference measurement channel.

### 7.2.4 Method of testing

#### 7.2.4.1 Initial conditions

Test environment: normal; see subclause D.2

RF channels to be tested for single carrier: B, M and T; see subclause 4.7.

The following additional tests shall be performed:

- a) On each of B, M and T, the test shall be performed under extreme power supply as defined in subclause D.5
- NOTE: Tests under extreme power supply also test extreme temperature.
- 1) Connect the test equipment as shown in Annex I.2.1.

#### 7.2.4.2 Procedure

- 1) For FDD BS start BS transmission according to E-TM 1.1 at manufacturer"s declared rated output power
- 2) Set the test signal mean power as specified in table 7.2-1 for Wide Area BS, in Table 7.2-2 for Local Area BS, in Table 7.2-3 for Home BS and in Table 7.2-4 for Medium Range BS.
- 3) Measure the throughput according to Annex E.
- 4) Repeat the measurement for the other RX port(s).

In addition, for a multi-band capable BS, the following steps shall apply:

- 5) For multi-band capable BS and single band tests, repeat the steps above per involved band where single carrier test models shall apply with no carrier activated in the other band.
- 6) For multi-band capable BS with separate antenna connector, the antenna connector not being under test shall be terminated.

### 7.2.5 Test requirement

For each measured E-UTRA carrier, the throughput shall be  $\geq 95\%$  of the maximum throughput of the reference measurement channel as specified in Annex A.1 with parameters specified in Table 7.2-1 for Wide Area BS, in Table 7.2-2 for Local Area BS, in Table 7.2-3 for Home BS and in Table 7.2-4 for Medium Range BS.

E-UTRA channel bandwidth [MHz]	Reference measurement channel	Reference sensitivity power level, PREFS [dBm]		
• •		f ≤ 3.0GHz	3.0GHz < f ≤ 4.2GHz	
1.4	FRC A1-1 in Annex A.1	-106.1	-105.8	
3	FRC A1-2 in Annex A.1	-102.3	-102.0	
5	FRC A1-3 in Annex A.1	-100.8	-100.5	
10	FRC A1-3 in Annex A.1*	-100.8	-100.5	
15	FRC A1-3 in Annex A.1*	-100.8	-100.5	
20	FRC A1-3 in Annex A.1*	-100.8	-100.5	
Note*: P <sub>REFSENS</sub> is the power level of a single instance of the reference measurement channel. This requirement shall be met for each consecutive application of a single instance of FRC A1-3 mapped to disjoint frequency ranges with a width of 25 Resource Blocks each.				

Table 7.2-1: Wide Area BS reference sensitivity levels

Table 7.2-2: Loca	al Area BS referenc	e sensitivity levels
-------------------	---------------------	----------------------

E-UTRA channel bandwidth [MHz]	Reference measurement channel	Reference sensitivity power level PREFSENS [dBm]	
		f ≤ 3.0GHz	3.0GHz < f ≤ 4.2GHz
1.4	FRC A1-1 in Annex A.1	-98.1	-97.8
3	FRC A1-2 in Annex A.1	-94.3	-94.0
5	FRC A1-3 in Annex A.1	-92.8	-92.5
10	FRC A1-3 in Annex A.1*	-92.8	-92.5
15	FRC A1-3 in Annex A.1*	-92.8	-92.5
20	FRC A1-3 in Annex A.1*	-92.8	-92.5
shall be met for eac	power level of a single instance of the re ch consecutive application of a single ins of 25 resource blocks each		

Table 7.2-3: Home	e BS reference	sensitivity	levels
-------------------	----------------	-------------	--------

channe	E-UTRA I bandwidth [MHz]	Reference measurement channel		sensitivity power level, PREFSENS [dBm]
			f ≤ 3.0GHz	3.0GHz < f ≤ 4.2GHz
	1.4	FRC A1-1 in Annex A.1	-98.1	-97.8
	3	FRC A1-2 in Annex A.1	-94.3	-94.0
	5	FRC A1-3 in Annex A.1	-92.8	-92.5
	10	FRC A1-3 in Annex A.1*	-92.8	-92.5
	15	FRC A1-3 in Annex A.1*	-92.8	-92.5
	20	FRC A1-3 in Annex A.1*	-92.8	-92.5
Note*:				

E-UTRA channel bandwidth [MHz]	Reference measurement channel		sensitivity power level, PREFSENS [dBm]	
		f ≤ 3.0GHz	3.0GHz < f ≤ 4.2GHz	
1.4	FRC A1-1 in Annex A.1	-101.1	-100.8	
3	FRC A1-2 in Annex A.1	-97.3	-97.0	
5	FRC A1-3 in Annex A.1	-95.8	-95.5	
10	FRC A1-3 in Annex A.1*	-95.8	-95.5	
15	FRC A1-3 in Annex A.1*	-95.8	-95.5	
20	FRC A1-3 in Annex A.1*	-95.8	-95.5	
Note*: P <sub>REFSENS</sub> is the power level of a single instance of the reference measurement channel. This requirement shall be met for each consecutive application of a single instance of FRC A1-3 mapped to disjoint frequency ranges with a width of 25 resource blocks each				

Table 7.2-4: Medium Range BS reference sensitivity levels

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The relationship between Minimum Requirements and Test Requirements is defined in subclause 4.1 and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

## 7.3 Dynamic range

### 7.3.1 Definition and applicability

The dynamic range is specified as a measure of the capability of the receiver to receive a wanted signal in the presence of an interfering signal inside the received channel bandwidth. In this condition a throughput requirement shall be met for a specified reference measurement channel. The interfering signal for the dynamic range requirement is an AWGN signal.

### 7.3.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 7.3.1.

### 7.3.3 Test purpose

To verify that at the BS receiver dynamic range, the relative throughput shall fulfil the specified limit.

### 7.3.4 Method of testing

#### 7.3.4.1 Initial conditions

Test environment: normal; see subclause D.2

RF channels to be tested for single carrier: B, M and T; see subclause 4.7

1) Connect the test equipment as shown in Annex I.2.2.

#### 7.3.4.2 Procedure

For each supported E-UTRA channel BW:

- 1) Adjust the signal generator for the wanted signal as specified in Table 7.3-1 for Wide Area BS, in Table 7.3-2 for Local Area BS, in Table 7.3-3 for Home BS and in table 7.3-4 for Medium Range BS.
- 2) Adjust the AWGN generator level as specified in Table 7.3-1 for Wide Area BS, in Table 7.3-2 for Local Area BS, in Table 7.3-3 for Home BS and in table 7.3-4 for Medium Range BS and set the frequency to the same frequency as the tested channel.

- 3) Measure the throughput according to Annex E and verify that it is within the specified level.
- 4) Repeat the measurement for the other RX port(s).

In addition, for a multi-band capable BS, the following steps shall apply:

- 5) For multi-band capable BS and single band tests, repeat the steps above per involved band with no carrier activated in the other band.
- 6) For multi-band capable BS with separate antenna connector, the antenna connector not being under test shall be terminated.

### 7.3.5 Test Requirements

For each measured E-UTRA carrier, the throughput shall be  $\geq 95\%$  of the maximum throughput of the reference measurement channel as specified in Annex A with parameters specified in Table 7.3-1 for Wide Area BS, in Table 7.3-2 for Local Area BS, in Table 7.3-3 for Home BS and in Table 7.3-4 for Medium Range BS.

E-UTRA channel bandwidth [MHz]	Reference measurement channel	Wanted signal mean power [dBm]	Interfering signal mean power [dBm] / BW <sub>Config</sub>	Type of interfering signal
1.4	FRC A2-1 in Annex A.2	-76.0	-88.7	AWGN
3	FRC A2-2 in Annex A.2	-72.1	-84.7	AWGN
5	FRC A2-3 in Annex A.2	-69.9	-82.5	AWGN
10	FRC A2-3 in Annex A.2*	-69.9	-79.5	AWGN
15	FRC A2-3 in Annex A.2*	-69.9	-77.7	AWGN
20	FRC A2-3 in Annex A.2*	-69.9	-76.4	AWGN
Note*: The wanted signal mean power is the power level of a single instance of				
the reference measurement channel. This requirement shall be met for				
each consecutive application of a single instance of FRC A2-3 mapped to				
disjoint frequency ranges with a width of 25 resource blocks each				

Table 7.3-1: Wide Area BS dynamic range

E-UTRA channel bandwidth [MHz]	Reference measurement channel	Wanted signal mean power [dBm]	Interfering signal mean power [dBm] / BWConfig	Type of interfering signal
1.4	FRC A2-1 in Annex A.2	-68.0	-80.7	AWGN
3	FRC A2-2 in Annex A.2	-64.1	-76.7	AWGN
5	FRC A2-3 in Annex A.2	-61.9	-74.5	AWGN
10	FRC A2-3 in Annex A.2*	-61.9	-71.5	AWGN
15	FRC A2-3 in Annex A.2*	-61.9	-69.7	AWGN
20	FRC A2-3 in Annex A.2*	-61.9	-68.4	AWGN
Note*: The wanted signal mean power is the power level of a single instance of the reference measurement channel. This requirement shall be met for each consecutive application of a single instance of FRC A2-3 mapped to disjoint frequency ranges with a width of 25 resource blocks each				

#### Table 7.3-2: Local Area BS dynamic range

Table 7.3-3: Home BS dynamic range

E-UTRA channel bandwidth [MHz]	Reference measurement channel	Wanted signal mean power [dBm]	Interfering signal mean power [dBm] / BW <sub>Config</sub>	Type of interfering signal
1.4	FRC A2-1 in Annex A.2	-31.5	-44.2	AWGN
3	FRC A2-2 in Annex A.2	-27.6	-40.2	AWGN
5	FRC A2-3 in Annex A.2	-25.4	-38	AWGN
10	FRC A2-3 in Annex A.2*	<b>-25</b> . 4	-35	AWGN
15	FRC A2-3 in Annex A.2*	<b>-25</b> . 4	-33.2	AWGN
20	FRC A2-3 in Annex A.2*	-25.4	-31.9	AWGN
Note*: The wanted signal mean power is the power level of a single instance of the reference measurement channel. This requirement shall be met for each consecutive application of a single instance of FRC A2-3 mapped to disjoint frequency ranges with a width of 25 resource blocks each				

E-UTRA channel bandwidth [MHz]	Reference measurement channel	Wanted signal mean power [dBm]	Interfering signal mean power [dBm] / BWConfig	Type of interfering signal
1.4	FRC A2-1 in Annex A.2	-71.0	-83.7	AWGN
3	FRC A2-2 in Annex A.2	-67.1	-79.7	AWGN
5	FRC A2-3 in Annex A.2	-64.9	-77.5	AWGN
10	FRC A2-3 in Annex A.2*	-64.9	-74.5	AWGN
15	FRC A2-3 in Annex A.2*	-64.9	-72.7	AWGN
20	FRC A2-3 in Annex A.2*	-64.9	-71.4	AWGN
Note*: The wanted signal mean power is the power level of a single instance of				
the reference measurement channel. This requirement shall be met for				
each consecutive application of a single instance of FRC A2-3 mapped to disjoint frequency ranges with a width of 25 resource blocks each				

Table 7.3-4: Medium Range BS dynamic range

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The relationship between Minimum Requirements and Test Requirements is defined in subclause 4.1 and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

### 7.4 In-channel selectivity

### 7.4.1 Definition and applicability

In-channel selectivity (ICS) is a measure of the receiver ability to receive a wanted signal at its assigned Resource Block locations in the presence of an interfering signal received at a larger power spectral density. In this condition a throughput requirement shall be met for a specified reference measurement channel. The interfering signal shall be an E-UTRA signal as specified in Annex C and shall be time aligned with the wanted signal.

### 7.4.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 7.4.1.

### 7.4.3 Test purpose

The purpose of this test is to verify the BS receiver ability to suppress the IQ leakage.

### 7.4.4 Method of testing

#### 7.4.4.1 Initial conditions

Test environment: normal; see subclause D.2.

RF channels to be tested for single carrier: B, M and T; see subclause 4.7

1) Connect the test equipment as shown in Annex I.2.3.

#### 7.4.4.2 Procedure

For each supported E-UTRA channel BW:

- 1) Adjust the signal generator for the wanted signal as specified in Table 7.4-1 for Wide Area BS, in Table 7.4-2 for Local Area BS, in Table 7.4-3 for Home BS and in Table 7.4-4 for Medium Range BS on one side of the F<sub>C</sub>.
- 2) Adjust the signal generator for the interfering signal as specified in Table 7.4-1 for Wide Area BS, in Table 7.4-2 for Local Area BS, in Table 7.4-3 for Home BS and in Table 7.4-4 for Medium Range BS at opposite side of the F<sub>C</sub> and adjacent to the wanted signal.
- 3) Measure the throughput according to Annex E.
- 4) Repeat the measurement with the wanted signal on the other side of the  $F_C$ , and the interfering signal at opposite side of the  $F_C$  and adjacent to the wanted signal.
- 5) Repeat the measurement for the other RX port(s).

In addition, for a multi-band capable BS, the following steps shall apply:

- 6) For multi-band capable BS and single band tests, repeat the steps above per involved band with no carrier activated in the other band.
- 7) For multi-band capable BS with separate antenna connector, the antenna connector not being under test shall be terminated.

## 7.4.5 Test Requirements

For each measured E-UTRA carrier, the throughput shall be  $\geq 95\%$  of the maximum throughput of the reference measurement channel as specified in Annex A with parameters specified in Table 7.4-1 for Wide Area BS, in Table7.4-2 for Local Area BS, in Table 7.4-3 for Home BS and in Table 7.4-4 for Medium Range BS.

E-UTRA channel bandwidth (MHz)	Reference measurement channel	Wanted signal mean power [dBm]		Interfering signal mean power [dBm]	Type of interfering signal
		f ≤ 3.0GHz	3.0GHz < f ≤ 4.2GHz		
1.4	A1-4 in Annex A.1	-105.5	-105.1	-87	1.4 MHz E-UTRA signal, 3 RBs
3	A1-5 in Annex A.1	-100.7	-100.3	-84	3 MHz E-UTRA signal, 6 RBs
5	A1-2 in Annex A.1	-98.6	-98.2	-81	5 MHz E-UTRA signal, 10 RBs
10	A1-3 in Annex A.1	-97.1	-96.7	-77	10 MHz E-UTRA signal, 25 RBs
15	A1-3 in Annex A.1*	-97.1	-96.7	-77	15 MHz E-UTRA signal, 25 RBs*
20	A1-3 in Annex A.1*	-97.1	-96.7	-77	20 MHz E-UTRA signal, 25 RBs*
Note*: Wanted and interfering signal are placed adjacently around Fc					

Table 7.4-1 Wide Area BS in-channel selectivity

E-UTRA channel bandwidth (MHz)	Reference measurement channel	Wanted signal mean power [dBm]		Interfering signal mean power [dBm]	Type of interfering signal
		f ≤ 3.0GHz	3.0GHz < f ≤ 4.2GHz		
1.4	A1-4 in Annex A.1	-97.5	-97.1	-79	1.4 MHz E-UTRA signal, 3 RBs
3	A1-5 in Annex A.1	-92.7	-92.3	-76	3 MHz E-UTRA signal, 6 RBs
5	A1-2 in Annex A.1	-90.6	-90.2	-73	5 MHz E-UTRA signal, 10 RBs
10	A1-3 in Annex A.1	-89.1	-88.7	-69	10 MHz E-UTRA signal, 25 RBs
15	A1-3 in Annex A.1*	-89.1	-88.7	-69	15 MHz E-UTRA signal, 25 RBs*
20	A1-3 in Annex A.1*	-89.1	-88.7	-69	20 MHz E-UTRA signal, 25 RBs*
Note*: Wanted and interfering signal are placed adjacently around Fc					

## Table 7.4-2 Local Area BS in-channel selectivity

E-UTRA channel bandwidth (MHz)	Reference measurement channel	Wanted signal mean power [dBm]		Interfering signal mean power [dBm]	Type of interfering signal
		f ≤ 3.0GHz	3.0GHz < f ≤ 4.2GHz		
1.4	A1-4 in Annex A.1	-97.5	-97.1	-79	1.4 MHz E-UTRA signal, 3 RBs
3	A1-5 in Annex A.1	-92.7	-92.3	-76	3 MHz E-UTRA signal, 6 RBs
5	A1-2 in Annex A.1	-90.6	-90.2	-73	5 MHz E-UTRA signal, 10 RBs
10	A1-3 in Annex A.1	-89.1	-88.7	-69	10 MHz E-UTRA signal, 25 RBs
15	A1-3 in Annex A.1*	-89.1	-88.7	-69	15 MHz E-UTRA signal, 25 RBs*
20	A1-3 in Annex A.1*	-89.1	-88.7	-69	20 MHz E-UTRA signal, 25 RBs*
Note*: Wanted and interfering signal are placed adjacently around Fc					

E-UTRA channel bandwidth (MHz)	Reference measurement channel	Wanted signal mean power [dBm]		Interfering signal mean power [dBm]	Type of interfering signal
		f ≤ 3.0GHz	3.0GHz < f ≤ 4.2GHz		
1.4	A1-4 in Annex A.1	-100.5	-100.1	-82	1.4 MHz E-UTRA signal, 3 RBs
3	A1-5 in Annex A.1	-95.7	-95.3	-79	3 MHz E-UTRA signal, 6 RBs
5	A1-2 in Annex A.1	-93.6	-93.2	-76	5 MHz E-UTRA signal, 10 RBs
10	A1-3 in Annex A.1	-92.1	-91.7	-72	10 MHz E-UTRA signal, 25 RBs
15	A1-3 in Annex A.1*	-92.1	-91.7	-72	15 MHz E-UTRA signal, 25 RBs*
20	A1-3 in Annex A.1*	-92.1	-91.7	-72	20 MHz E-UTRA signal, 25 RBs*
Note*: Wanted and interfering signal are placed adjacently around Fc					

 Table 7.4-4 Medium Range BS in-channel selectivity

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The relationship between Minimum Requirements and Test Requirements is defined in subclause 4.1 and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

# 7.5 Adjacent Channel Selectivity (ACS) and narrow-band blocking

## 7.5.1 Definition and applicability

Adjacent channel selectivity (ACS) is a measure of the receiver"s ability to receive a wanted signal at its assigned channel frequency in the presence of an adjacent channel signal with a specified centre frequency offset of the interfering signal to the band edge of a victim system.

The interfering signal shall be an E-UTRA signal as specified in Annex C.

## 7.5.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 7.5.

## 7.5.3 Test purpose

The test purpose is to verify the ability of the BS receiver filter to suppress interfering signals in the channels adjacent to the wanted channel.

### 7.5.4 Method of test

#### 7.5.4.1 Initial conditions

Test environment: normal; see subclause D.2.

RF channels to be tested for single carrier: B, M and T; see subclause 4.7.

RF bandwidth positions to be tested for multi-carrier and/or CA:  $M_{RFBW}$  in single-band operation, see subclause 4.7.1;  $B_{RFBW}$ -T"<sub>RFBW</sub> and B"<sub>RFBW</sub>-T<sub>RFBW</sub> in multi-band operation, see subclause 4.7.1.

1) Set-up the measurement system as shown in Annex I.2.4.

## 7.5.4.2 Procedure for Adjacent Channel Selectivity

- 1) Generate the wanted signal using the applicable test configuration specified in subclause 4.10 and 4.11 and adjust the input level to the base station under test to the level specified in Table 7.5-3 for Wide Area BS, in Table7.5-4 for Local Area BS, in Table 7.5-5 for Home BS and in Table 7.5-6 for Medium Range BS.
- 2) Set-up the interfering signal at the adjacent channel frequency and adjust the interfering signal level at the base station input to the level defined in Table 7.5-3 for Wide Area BS, in Table7.5-4 for Local Area BS, in Table 7.5-5 for Home BS and in Table 7.5-6 for Medium Range BS.
- 3) Measure the throughput according to Annex E, for multi-carrier and/or CA operation the throughput shall be measured for relevant carriers specified by the test configuration specified in subclause 4.10 and 4.11.
- 4) Repeat the test for the port(s), which was (were) terminated.

In addition, for a multi-band capable BS with separate antenna connectors, the following steps shall apply:

- 5) For single band tests, repeat the steps above per involved band where single band test configurations shall apply with no carrier activated in the other band.
- 6) The interfering signal shall first be applied on the same port as the wanted signal. The test shall be repeated with the interfering signal applied on the other port (if any) mapped to the same receiver as the wanted signal. Any antenna connector with no signal applied in case of single-band or multi-band test shall be terminated.
- 7) Repeat step 6) with the wanted signal for the other band(s) applied on the respective port(s).

## 7.5.4.3 Procedure for narrow-band blocking

1) For FDD BS declared to be capable of single carrier operation only, start BS transmission according to E-TM 1.1 at manufacturer"s declared rated output power.

For a FDD BS declared to be capable of multi-carrier and/or CA operation, set the BS to transmit according to E-TM 1.1 on all carriers configured using the applicable test configuration and corresponding power setting specified in sub-clause 4.10 and 4.11.

- 2) Generate the wanted signal using the applicable test configuration specified in subclause 4.10 and 4.11 and adjust the input level to the base station under test to the level specified in Table 7.5-1.
- 3) Adjust the interfering signal level at the base station input to the level defined in Table 7.5-1. Set-up and sweep the interfering RB centre frequency offset to the channel edge of the wanted signal according to Table 7.5-2.
- 4) Measure the throughput according to Annex E, for multi-carrier and/or CA operation the throughput shall be measured for relevant carriers specified by the test configuration specified in subclause 4.11.
- 5) Repeat the test for the port(s), which was (were) terminated.

In addition, for a multi-band capable BS with separate antenna connectors, the following steps shall apply:

- 6) For single band tests, repeat the steps above per involved band where single band test configurations and test models shall apply with no carrier activated in the other band.
- 7) The interfering signal shall first be applied on the same port as the wanted signal. The test shall be repeated with the interfering signal applied on the other port (if any) mapped to the same receiver as the wanted signal. Any antenna connector with no signal applied in case of single-band or multi-band test shall be terminated.
- 8) Repeat step 7) with the wanted signal for the other band(s) applied on the respective port(s).

## 7.5.5 Test Requirements

For each measured E-UTRA carrier, the throughput shall be  $\ge 95\%$  of the maximum throughput of the reference measurement channel.

For Wide Area BS, the wanted and the interfering signal coupled to the BS antenna input are specified in Table 7.5-1 and 7.5-2 for narrowband blocking and 7.5-3 for ACS. The reference measurement channel for the wanted signal is specified in Table 7.2-1 for each channel bandwidth and further specified in Annex A.

For Medium Range BS, the wanted and the interfering signal coupled to the BS antenna input are specified in Tables 7.5-1 and 7.5-2 for narrowband blocking and in Table 7.5-6 for ACS. The reference measurement channel for the wanted signal is specified in Table 7.2-4 for each channel bandwidth and further specified in Annex A.

For Local Area BS, the wanted and the interfering signal coupled to the BS antenna input are specified in Tables 7.5-1 and 7.5-2 for narrowband blocking and 7.5-4 for ACS. The reference measurement channel for the wanted signal is specified in Table 7.2-2 for each channel bandwidth and further specified in Annex A.

For Home BS, the wanted and the interfering signal coupled to the BS antenna input are specified in Table 7.5-1 and 7.5-2 for narrowband blocking and 7.5-5 for ACS. The reference measurement channel for the wanted signal is specified in Table 7.2-3 for each channel bandwidth and further specified in Annex A.

The ACS and narrowband blocking requirement is applicable outside the Base Station RF bandwidth or maximum radio bandwidth edges. The interfering signal offset is defined relative to the lower (upper) or maximum radio bandwidth edges.

For a BS operating in non-contiguous spectrum within any operating band, the ACS requirement applies in addition inside any sub-block gap, in case the sub-block gap size is at least as wide as the E-UTRA interfering signal in Tables 7.5-3, 7.5-4 and 7.5-6. The interfering signal offset is defined relative to the sub-block edges inside the sub-block gap.

For a BS capable of multi-band operation, the ACS requirement applies in addition inside any inter RF bandwidth gap, in case the inter RF bandwidth gap size is at least as wide as the E-UTRA interfering signal in Tables 7.5-3, 7.5-4 and 7.5-6. The interfering signal offset is defined relative to the RF bandwidth edges inside the inter RF bandwidth gap.

For a BS operating in non-contiguous spectrum within any operating band, the narrowband blocking requirement applies in addition inside any sub-block gap, in case the sub-block gap size is at least as wide as the channel bandwidth of the E-UTRA interfering signal in Table 7.5-2. The interfering signal offset is defined relative to the sub-block edges inside the sub-block gap.

For a BS capable of multi-band operation, the narrowband blocking requirement applies in addition inside any inter RF bandwidth gap, in case the inter RF bandwidth gap size is at least as wide as the E-UTRA interfering signal in Table 7.5-2. The interfering signal offset is defined relative to the RF bandwidth edges inside the inter RF bandwidth gap.

	Wanted signal mean power [dBm]	Interfering signal mean power [dBm]	Type of interfering signal		
Wide Area BS	P <sub>REFSENS</sub> + 6dB*	-49	See Table 7.5-2		
Medium Range BS	P <sub>REFSENS</sub> + 6dB*	-44	See Table 7.5-2		
Local Area BS	P <sub>REFSENS</sub> +6dB*	-41	See Table 7.5-2		
Home BS	P <sub>REFSENS</sub> + 14dB*	-33	See Table 7.5-2		
Note*: P <sub>REFSENS</sub> depends on the channel bandwidth as specified in TS 36.104 [2] subclause 7.2.1.					

Table 7.5-1: Narrowband blocking requirement

E-UTRA channel BW of the lowest (highest) carrier received [MHz]	Interfering RB centre frequency offset to the lower (upper) edge or sub-block edge inside a sub-block gap [kHz]	Type of interfering signal			
1.4	±(252.5+m*180), m=0, 1, 2, 3, 4, 5	1.4 MHz E-UTRA signal, 1 RB*			
3	±(247.5+m*180), m=0, 1, 2, 3, 4, 7, 10, 13	3 MHz E-UTRA signal, 1 RB*			
5	±(342.5+m*180), m=0, 1, 2, 3, 4, 9, 14, 19, 24	5 MHz E-UTRA signal, 1 RB*			
10	±(347.5+m*180), m=0, 1, 2, 3, 4, 9, 14, 19, 24	5 MHz E-UTRA signal, 1 RB*			
15	±(352.5+m*180), m=0, 1, 2, 3, 4, 9, 14, 19, 24	5 MHz E-UTRA signal, 1 RB*			
20	±(342.5+m*180), m=0, 1, 2, 3, 4, 9, 14, 19, 24	5 MHz E-UTRA signal, 1 RB*			
Note*: Interfering signal consisting of one resource block is positioned at the stated offset, the channel bandwidth of the interfering signal is located adjacently to the lower (upper) edge.					

Table 7.5-2: Interfering signal for Narrowband blocking requirement

E-UTRA channel bandwidth of the lowest (highest) carrier received [MHz]	Wanted signal mean power [dBm]	Interfering signal mean power [dBm]	Interfering signal centre frequency offset from the lower (upper) edge or sub-block edge inside a sub-block gap [MHz]	Type of interfering signal		
1.4	P <sub>REFSENS</sub> + 11dB*	-52	±0.7025	1.4MHz E-UTRA signal		
3	P <sub>REFSENS</sub> + 8dB*	-52	±1.5075	3MHz E-UTRA signal		
5	P <sub>REFSENS</sub> + 6dB*	-52	±2.5025	5MHz E-UTRA signal		
10	P <sub>REFSENS</sub> + 6dB*	-52	±2.5075	5MHz E-UTRA signal		
15	P <sub>REFSENS</sub> + 6dB*	-52	±2.5125	5MHz E-UTRA signal		
20	P <sub>REFSENS</sub> + 6dB*	-52	±2.5025	5MHz E-UTRA signal		
Note*: P <sub>F</sub>	Note*: P <sub>REFSENS</sub> depends on the channel bandwidth as specified in TS 36.104 [2] subclause 7.2.1.					

E-UTRA channel bandwidth of the lowest (highest) carrier received [MHz]	Wanted signal mean power [dBm]	Interfering signal mean power [dBm]	Interfering signal centre frequency offset from the lower (upper) edge or sub-block edge inside a sub-block gap [MHz]	Type of interfering signal	
1.4	P <sub>REFSENS</sub> + 11dB*	-44	±0.7025	1.4MHz E-UTRA signal	
3	P <sub>REFSENS</sub> + 8dB*	-44	±1.5075	3MHz E-UTRA signal	
5	P <sub>REFSENS</sub> + 6dB*	-44	±2.5025	5MHz E-UTRA signal	
10	P <sub>REFSENS</sub> + 6dB*	-44	±2.5075	5MHz E-UTRA signal	
15	P <sub>REFSENS</sub> + 6dB*	-44	±2.5125	5MHz E-UTRA signal	
20	P <sub>REFSENS</sub> + 6dB*	-44	±2.5025	5MHz E-UTRA signal	
Note*: PREFSENS depends on the channel bandwidth as specified in TS 36.104 [2] subclause 7.2.1.					

Table 7.5-4: Adjacent channel selectivity for Local Area BS

Table 7.5-5: Adjacent channel selectivity for Home BS

E-UTRA channel bandwidth [MHz]	Wanted signal mean power [dBm]	Interfering signal mean power [dBm]	Interfering signal centre frequency offset from the channel edge of the wanted signal [MHz]	Type of interfering signal	
1.4	P <sub>REFSENS</sub> + 27dB*	-28	0.7025	1.4MHz E-UTRA signal	
3	P <sub>REFSENS</sub> + 24dB*	-28	1.5075	3MHz E-UTRA signal	
5	P <sub>REFSENS</sub> + 22dB*	-28	2.5025	5MHz E-UTRA signal	
10	P <sub>REFSENS</sub> + 22dB*	-28	2.5075	5MHz E-UTRA signal	
15	P <sub>REFSENS</sub> + 22dB*	-28	2.5125	5MHz E-UTRA signal	
20	P <sub>REFSENS</sub> + 22dB*	-28	2.5025	5MHz E-UTRA signal	
Note*: P <sub>REFSENS</sub> depends on the channel bandwidth as specified in TS 36.104 [2] subclause 7.2.1.					

E-UTRA channel bandwidth of the lowest (highest) carrier received [MHz]	Wanted signal mean power [dBm]	Interfering signal mean power [dBm]	Interfering signal centre frequency offset from the lower (upper) edge or sub-block edge inside a sub-block gap [MHz]	Type of interfering signal		
1.4	P <sub>REFSENS</sub> + 11dB*	-47	±0.7025	1.4MHz E-UTRA signal		
3	P <sub>REFSENS</sub> + 8dB*	-47	±1.5075	3MHz E-UTRA signal		
5	P <sub>REFSENS</sub> + 6dB*	-47	±2.5025	5MHz E-UTRA signal		
10	P <sub>REFSENS</sub> + 6dB*	-47	±2.5075	5MHz E-UTRA signal		
15	P <sub>REFSENS</sub> + 6dB*	-47	±2.5125	5MHz E-UTRA signal		
20	P <sub>REFSENS</sub> + 6dB*	-47	±2.5025	5MHz E-UTRA signal		
Note*: P <sub>F</sub>	Note*: P <sub>REFSENS</sub> depends on the channel bandwidth as specified in TS 36.104 [2] subclause 7.2.1.					

Table 7.5-6: Adjacent channel selectivity for Medium Range BS

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The relationship between Minimum Requirements and Test Requirements is defined in subclause 4.1 and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

## 7.6 Blocking

## 7.6.1 Definition and applicability

The blocking characteristics is a measure of the receiver ability to receive a wanted signal at its assigned channel in the presence of an unwanted interferer, which are either a 1.4MHz, 3MHz or 5MHz E-UTRA signal for in-band blocking or a CW signal for out-of-band blocking. The interfering E-UTRA signal shall be as specified in Annex C.

The blocking performance requirement applies as specified in the Tables 7.6-1, 7.6-1a, 7.6-1b, 7.6-1c and 7.6-2 in clause 7.6.5.

## 7.6.2 Minimum Requirements

The minimum requirement is in TS 36.104 [2] subclause 7.6.1.

## 7.6.3 Test purpose

The test stresses the ability of the BS receiver to withstand high-level interference from unwanted signals at specified frequency offsets without undue degradation of its sensitivity.

## 7.6.4 Method of test

#### 7.6.4.1 Initial conditions

Test environment: normal; see subclause D.2.

RF channels to be tested for single carrier: M see subclause 4.7. The BS shall be configured to operate as close to the centre of the operating band (see Table 5.5-1) as possible.

RF bandwidth positions to be tested for multi-carrier and/or CA:  $M_{RFBW}$  in single-band operation, see subclause 4.7.1;  $B_{RFBW}$ -T"<sub>RFBW</sub> and B"<sub>RFBW</sub>-T<sub>RFBW</sub> in multi-band operation, see subclause 4.7.1.

In addition, in multi-band operation:

- For B<sub>RFBW</sub>\_T"<sub>RFBW</sub>, out-of-band blocking testing above the highest operating band may be omitted
- For B"<sub>RFBW</sub>\_T<sub>RFBW</sub>, out-of-band blocking testing below the lowest operating band may be omitted

Channel bandwidths to be tested:

- a) In the interferer frequency range ( $F_{UL\_low}$ -20) MHz to ( $F_{UL\_high}$ +20) MHz the requirement shall be tested with the lowest and the highest bandwidth supported by the BS.
- b) In the interferer frequency ranges 1 MHz to ( $F_{UL\_low}$ -20) MHz and ( $F_{UL\_high}$ +20) MHz to 12750 MHz the requirement shall be tested only with the lowest bandwidth supported by the BS.
- 1) Connect the signal generator for the wanted signal and the signal generator for the interfering signal to the antenna connector of one Rx port as shown in Annex I.2.5.
- 2) Terminate any other Rx port(s) not under test.
- Generate the wanted signal according to reference measurement channel in annex A.1 to the BS under test. The level of the wanted signal measured at the BS antenna connector shall be set to the level specified in subclause 7.6.5.

#### 7.6.4.2 Procedure

1) For FDD BS capable of single carrier operation only, start BS transmission according to E-TM 1.1 at manufacturer's declared rated output power.

For a FDD BS declared to be capable of multi-carrier and/or CA operation, set the BS to transmit according to E-TM 1.1 on all carriers configured using the applicable test configuration and corresponding power setting specified in sub-clause 4.10 and 4.11.

The transmitter may be turned off for the out-of-band blocker tests when the frequency of the blocker is such that no IM2 or IM3 products fall inside the bandwidth of the wanted signal.

- 2) Adjust the signal generators to the type of interfering signals, levels and the frequency offsets as specified in Tables 7.6-1, 7.6-2 and 7.6-3 for Wide Area BS, in Tables 7.6-1a, 7.6-2 and 7.6-4 for Local Area BS, in Table 7.6-1b and 7.6-2 for Home BS and in Table 7.6-1c, 7.6.2 and 7.6-5 for Medium Range BS. The E-UTRA interfering signal shall be swept with a step size of 1 MHz starting from the minimum offset to the channel edges of the wanted signal as specified in Table 7.6-2. The CW interfering signal shall be swept with a step size of 1 MHz within the range specified in Table 7.6-1 and 7.6-3 for Wide Area BS, in Table 7.6-1a and 7.6-4 for Local Area BS, in Table 7.6-1b for Home BS and in Table 7.6-1c and 7.6-5 for Medium Range.
- 3) Measure the throughput of the wanted signal at the BS receiver according to Annex E, for multi-carrier and/or CA operation the throughput shall be measured for relevant carriers specified by the test configuration specified in subclause 4.10 and 4.11.
- 4) Interchange the connections of the BS Rx ports and repeat the measurements according to steps (1) to (3).

In addition, for a multi-band capable BS with separate antenna connectors, the following steps shall apply:

- 5) For single band tests, repeat the steps above per involved band where single band test configurations and test models shall apply with no carrier activated in the other band.
- 6) The interfering signal shall first be applied on the same port as the wanted signal. The test shall be repeated with the interfering signal applied on the other port (if any) mapped to the same receiver as the wanted signal. Any antenna connector with no signal applied in case of single-band or multi-band test shall be terminated.
- 7) Repeat step 6) with the wanted signal for the other band(s) applied on the respective port(s).

## 7.6.5 Test Requirements

### 7.6.5.1 General requirement

For each measured E-UTRA carrier, the throughput shall be  $\geq 95\%$  of the maximum throughput of the reference measurement channel, with a wanted and an interfering signal coupled to BS antenna input using the parameters in Tables 7.6-1, 7.6-1a, 7.6-1b, 7.6-1c and 7.6-2. The reference measurement channel for the wanted signal is specified in Tables 7.2-1, 7.2-2, 7.2-3 and 7.2-4 for each channel bandwidth and further specified in Annex A.

The blocking requirement is applicable outside the Base Station RF bandwidth or maximum radio bandwidth edges. The interfering signal offset is defined relative to the lower (upper) or maximum radio bandwidth edges.

For a BS operating in non-contiguous spectrum within any operating band, the blocking requirement applies in addition inside any sub-block gap, in case the sub-block gap size is at least as wide as twice the interfering signal minimum offset in Table 7.6-2. The interfering signal offset is defined relative to the sub-block edges inside the sub-block gap.

For a BS capable of multi-band operation, the requirement in the in-band blocking frequency ranges applies for each supported operating band. The requirement applies in addition inside any inter RF bandwidth gap, in case the inter RF bandwidth gap size is at least as wide as twice the interfering signal minimum offset in Table 7.6-2.

For a BS capable of multi-band operation, the requirement in the out-of-band blocking frequency ranges apply for each operating band, with the exception that the in-band blocking frequency ranges of all supported operating bands according to Tables 7.6-1, 7.6-1a and 7.6-1c shall be excluded from the out-of-band blocking requirement.

Operating Band		nal [MHz]	m	nterfering Signal ean power [dBm]	Wanted Signal mean power [dBm] *	Interfering signal centre frequency minimum frequency offset from the lower (upper) edge or sub-block edge inside a sub- block gap [MHz]	Type of Interfering Signal
1-7, 9-11, 13, 14, 18,	(F <sub>UL_low</sub> -20)	to (F <sub>UL_high</sub>	+20)	-43	P <sub>REFSENS</sub> +6dB**	See table 7.6-2	See table 7.6-2
19, 21-23, 24, 27, 33- 44	1 (F <sub>UL_high</sub> +20)	to (F <sub>UL_low</sub> - to 12750	20)	-15	P <sub>REFSENS</sub> +6dB	_	CW carrier
8, 26, 28	(F <sub>UL_low</sub> -20)	to (F <sub>UL_high</sub>	+10)	-43	P <sub>REFSENS</sub> +6dB**	See table 7.6-2	See table 7.6-2
	1 (F <sub>UL_high</sub> +10)	to (F <sub>UL_low</sub> to 12750	-20)	-15	P <sub>REFSENS</sub> +6dB		CW carrier
12	(F <sub>UL_low</sub> -20)	to (F <sub>UL_high</sub>	+13)	-43	P <sub>REFSENS</sub> +6dB**	See table 7.6-2	See table 7.6-2
	1 (F <sub>UL_high</sub> +13)	to (F <sub>UL_low</sub> to 12750	-20)	-15	P <sub>REFSENS</sub> +6dB		CW carrier
17	(F <sub>UL_low</sub> -20)	to (F <sub>UL_high</sub>	+18)	-43	P <sub>REFSENS</sub> +6dB**	See table 7.6-2	See table 7.6-2
	1 (F <sub>UL_high</sub> +18)	to (F <sub>UL_low</sub> to 12750	-20)	-15	P <sub>REFSENS</sub> +6dB		CW carrier
20	(F <sub>UL_low</sub> -11)	to $(F_{UL_high})$	+20)	-43	P <sub>REFSENS</sub> +6dB**	See table 7.6-2	See table 7.6-2
	1 (F <sub>UL_high</sub> +20)	to (F <sub>UL_low</sub> to 12750	-11)	-15	P <sub>REFSENS</sub> +6dB	—	CW carrier
25	(F <sub>UL_low</sub> -20)	to $(F_{UL_high})$	+15)	-43	P <sub>REFSENS</sub> +6dB**	See table 7.6-2	See table 7.6-2
	1 (F <sub>UL_high</sub> +15)	to (F <sub>UL_low</sub> 12750	-20)	-15	P <sub>REFSENS</sub> +6dB	—	CW carrier
Note**: Fo	REFSENS depends	of multiband op f the operating	peration, ir	n case of inte		subclause 7.2.1. not in the in-band blo the wanted signal me	

Table 7.6-1: Blocking performance requirement for Wide Area BS

equal to PREFSENS + 1.4 dB.

NOTE: Table 7.6-1 assumes that two operating bands, where the downlink operating band (see Table 5.5-1) of one band would be within the in-band blocking region of the other band, are not deployed in the same geographical area.

Operating Band		ency nal [N	of Interfering /Hz]	Interfering Signal mean power [dBm]	Wanted Signal mean power [dBm] *	Interfering signal centre frequency minimum frequency offset from the lower(upper) edge or sub- block edge inside a sub- block gap [MHz]	Type of Interfering Signal
1-7, 9-11, 13-14,	(F <sub>UL_low</sub> -20)	to	(F <sub>UL_high</sub> +20)	-35	P <sub>REFSENS</sub> +6dB**	See table 7.6-2	See table 7.6-2
18,19,21- 23, 24, 27, 33-44	1 (F <sub>UL_high</sub> +20)	to to	(F <sub>UL_low</sub> -20) 12750	-15	P <sub>REFSENS</sub> +6dB	—	CW carrier
8, 26, 28	(F <sub>UL_low</sub> -20)	to	$(F_{UL_high} + 10)$	-35	P <sub>REFSENS</sub> +6dB**	See table 7.6-2	See table 7.6-2
	1 (F <sub>UL_high</sub> +10)	to to	(F <sub>UL_low</sub> -20) 12750	-15	P <sub>REFSENS</sub> +6dB		CW carrier
12	(F <sub>UL_low</sub> -20)	to	(F <sub>UL_high</sub> +13)	-35	P <sub>REFSENS</sub> +6dB**	See table 7.6-2	See table 7.6-2
	1 (F <sub>UL_high</sub> +13)	to to	(F <sub>UL_low</sub> -20) 12750	-15	P <sub>REFSENS</sub> +6dB		CW carrier
17	(F <sub>UL_low</sub> -20)	to	(F <sub>UL_high</sub> +18)	-35	P <sub>REFSENS</sub> +6dB**	See table 7.6-2	See table 7.6-2
	1 (F <sub>UL_high</sub> +18)	to to	(F <sub>UL_low</sub> -20) 12750	-15	P <sub>REFSENS</sub> +6dB	—	CW carrier
20	(F <sub>UL_low</sub> -11)	to	$(F_{UL_high} + 20)$	-35	P <sub>REFSENS</sub> +6dB**	See table 7.6-2	See table 7.6-2
	1 (F <sub>UL_high</sub> +20)	to to	(F <sub>UL_low</sub> -11) 12750	-15	P <sub>REFSENS</sub> +6dB	—	CW carrier
25	(F <sub>UL_low</sub> -20)	to	$(F_{UL_high} + 15)$	-35	P <sub>REFSENS</sub> +6dB**	See table 7.6-2	See table 7.6-2
	1 (F <sub>UL_high</sub> +15)	to	(F <sub>UL_low</sub> -20) 12750	-15	P <sub>REFSENS</sub> +6dB	_	CW carrier
Note**: Fo	or a BS capable	of mu	Itiband operatio	n, in case of inte		ubclause 7.2.1. not in the in-band blo the wanted signal me	

NOTE: Table 7.6-1a assumes that two operating bands, where the downlink operating band (see Table 5.5-1) of one band would be within the in-band blocking region of the other band, are not deployed in the same geographical area.

Operating Band		ency nal [N	of Interfering IHz]	Interfering Signal mean power [dBm]	Wanted Signal mean power [dBm] *	Interfering signal centre frequency minimum frequency offset from the channel edge of the wanted signal [MHz]	Type of Interfering Signal
1-7, 9-11, 13, 14,	(F <sub>UL_low</sub> -20)	to	$(F_{UL_high} + 20)$	-27	P <sub>REFSENS</sub> +14dB	See table 7.6-2	See table 7.6-2
18,19, 21- 23, 24, 27, 33-44	1 (F <sub>∪L_high</sub> +20)	to to	(F <sub>UL_low</sub> -20) 12750	-15	P <sub>REFSENS</sub> +14dB	—	CW carrier
8, 26, 28	(F <sub>UL_low</sub> -20)	to	$(F_{UL_high} + 10)$	-27	P <sub>REFSENS</sub> +14dB	See table 7.6-2	See table 7.6-2
	1 (F <sub>UL_high</sub> +10)	to to	(F <sub>UL_low</sub> -20) 12750	-15	P <sub>REFSENS</sub> +14dB	—	CW carrier
12	(F <sub>UL_low</sub> -20)	to	$(F_{UL_high} + 13)$	-27	P <sub>REFSENS</sub> +14dB	See table 7.6-2	See table 7.6-2
	1 (F <sub>UL_high</sub> +13)	to to	(F <sub>UL_low</sub> -20) 12750	-15	P <sub>REFSENS</sub> +14dB	_	CW carrier
17	(F <sub>UL_low</sub> -20)	to	$(F_{UL_{high}} + 18)$	-27	P <sub>REFSENS</sub> +14dB	See table 7.6-2	See table 7.6-2
	1 (F <sub>UL_high</sub> +18)	to to	(F <sub>UL_low</sub> -20) 12750	-15	P <sub>REFSENS</sub> +14dB		CW carrier
20	(F <sub>UL_low</sub> -11)	to	$(F_{UL_high} + 20)$	-27	P <sub>REFSENS</sub> +14dB	See table 7.6-2	See table 7.6-2
	1 (F <sub>UL_high</sub> +20)	to to	(F <sub>UL_low</sub> -11) 12750	-15	P <sub>REFSENS</sub> +14dB	—	CW carrier
25	(F <sub>UL_low</sub> -20)	to	$(F_{UL_high} + 15)$	-27	P <sub>REFSENS</sub> +14dB	See table 7.6-2	See table 7.6-2
	1 (F <sub>UL high</sub> +15)	to	(F <sub>UL_low</sub> -20) 12750	-15	P <sub>REFSENS</sub> +14dB	—	CW carrier
Note*: P <sub>F</sub>	REFSENS depends	on th	e channel band	width as specifie	d in TS 36.104 [2] s	ubclause 7.2.1.	

NOTE: Table 7.6-1b assumes that two operating bands, where the downlink operating band (see Table 5.5-1) of one band would be within the in-band blocking region of the other band, are not deployed in the same geographical area.

Operating Band	Centre Freque Sigr	ency d nal [Mi		Interfering Signal mean power [dBm]	Wanted Signal mean power [dBm] *	Interfering signal centre frequency minimum frequency offset to the lower (higher) edge or sub-block edge inside a sub- block gap [MHz]	Type of Interfering Signal
1-7, 9-11, 13, 14,	(F <sub>UL_low</sub> -20)	to	$(F_{UL_high} + 20)$	-38	P <sub>REFSENS</sub> +6dB**	See table 7.6-2	See table 7.6-2
18,19, 21- 23, 24, 27, 33-44	1 (F <sub>UL_high</sub> +20)	to to	(F <sub>UL_low</sub> -20) 12750	-15	P <sub>REFSENS</sub> +6dB		CW carrier
8, 26, 28	(F <sub>UL_low</sub> -20)	to	$(F_{UL_high} + 10)$	-38	P <sub>REFSENS</sub> +6dB**	See table 7.6-2	See table 7.6-2
	1 (F <sub>UL_high</sub> +10)	to to	(F <sub>UL_low</sub> -20) 12750	-15	P <sub>REFSENS</sub> +6dB	—	CW carrier
12	(F <sub>UL_low</sub> -20)	to	$(F_{UL_high} + 13)$	-38	P <sub>REFSENS</sub> +6dB**	See table 7.6-2	See table 7.6-2
	1 (F <sub>UL_high</sub> +13)	to to	(F <sub>UL_low</sub> -20) 12750	-15	P <sub>REFSENS</sub> +6dB		CW carrier
17	(F <sub>UL_low</sub> -20)	to	$(F_{UL_high} + 18)$	-38	P <sub>REFSENS</sub> +6dB**	See table 7.6-2	See table 7.6-2
	1 (F <sub>UL_high</sub> +18)	to to	(F <sub>UL_low</sub> -20) 12750	-15	P <sub>REFSENS</sub> +6dB		CW carrier
20	(F <sub>UL_low</sub> -11)	to	(F <sub>UL_high</sub> +20)	-38	P <sub>REFSENS</sub> +6dB**	See table 7.6-2	See table 7.6-2
	1 (F <sub>UL_high</sub> +20)	to to	(F <sub>UL_low</sub> -11) 12750	-15	P <sub>REFSENS</sub> +6dB	—	CW carrier
25	(F <sub>UL_low</sub> -20)	to	$(F_{UL_high} + 15)$	-38	P <sub>REFSENS</sub> +6dB**	See table 7.6-2	See table 7.6-2
	1 (F <sub>UL_high</sub> +15)	to to	(F <sub>UL_low</sub> -20) 12750	-15	P <sub>REFSENS</sub> +6dB	—	CW carrier
Note**: Fo	or a BS capable	of mult f the o	tiband operatio	n, in case of inte		subclause 7.2.1. not in the in-band blo the wanted signal me	

Table 7.6-1c: Blocking performance	requirement for Medium Range BS

NOTE: Table 7.6-1c assumes that two operating bands, where the downlink operating band (see Table 5.5-1) of one band would be within the in-band blocking region of the other band, are not deployed in the same geographical area.

E-UTRA channel BW of the lowest (highest) carrier received [MHz]	Interfering signal centre frequency minimum offset to the lower (upper) edge or sub-block edge inside a sub- block gap [MHz]	Type of interfering signal
1.4	±2.1	1.4MHz E-UTRA signal
3	±4.5	3MHz E-UTRA signal
5	±7.5	5MHz E-UTRA signal
10	±7.5	5MHz E-UTRA signal
15	±7.5	5MHz E-UTRA signal
20	±7.5	5MHz E-UTRA signal

Table 7.6-2: Interfering signals for blocking performance requirement

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The relationship between Minimum Requirements and Test Requirements is defined in subclause 4.1 and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

#### 7.6.5.2 Co-location with other base stations

This additional blocking requirement may be applied for the protection of E-UTRA BS receivers when GSM, CMDA, UTRA or E-UTRA BS operating in a different frequency band are co-located with an E-UTRA BS. The requirement is applicable to all channel bandwidths supported by the E-UTRA BS.

The requirements in this clause assume a 30 dB coupling loss between interfering transmitter and E-UTRA BS receiver and are based on co-location with base stations of the same class.

For each measured E-UTRA carrier, the throughput shall be  $\geq 95\%$  of the maximum throughput of the reference measurement channel, with a wanted and an interfering signal coupled to BS antenna input using the parameters in Table 7.6-3 for Wide Area BS, in Table 7.6-4 for Local Area BS and in Table 7.6-5 for Medium Range BS. The reference measurement channel for the wanted signal is specified in Tables 7.2-1, 7.2-2 and 7.2-4 for each channel bandwidth and further specified in Annex A.

Co-located BS type	Centre Frequency of Interfering Signal (MHz)	Interfering Signal mean power (dBm)	Wanted Signal mean power (dBm)	Type of Interfering Signal
Macro GSM850 or CDMA850	869 – 894	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
Macro GSM900	921 – 960	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
Macro DCS1800	1805 – 1880	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
Macro PCS1900	1930 – 1990	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA UTRA FDD Band I or E-UTRA Band 1	2110 - 2170	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA UTRA FDD Band II or E-UTRA Band 2	1930 – 1990	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA UTRA FDD Band III or E-UTRA Band 3	1805 – 1880	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA UTRA FDD Band IV or E-UTRA Band 4	2110 – 2155	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA UTRA FDD Band V or E-UTRA Band 5	869 – 894	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA UTRA FDD Band VI or E-UTRA Band 6	875 – 885	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA UTRA FDD Band VII or E-UTRA Band 7	2620 – 2690	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA UTRA FDD Band VIII or E-UTRA Band 8	925 – 960	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA UTRA FDD Band IX or E-UTRA Band 9	1844.9 – 1879.9	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA UTRA FDD Band X or E-UTRA Band 10	2110 – 2170	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA UTRA FDD Band XI or E-UTRA Band 11	1475.9 –1495.9	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA UTRA FDD Band XII or E-UTRA Band 12	729 - 746	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA UTRA FDD Band XIIII or E-UTRA Band 13	746 - 756	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA UTRA FDD Band XIV or E-UTRA Band 14	758 - 768	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA E-UTRA Band 17	734 - 746	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA E-UTRA Band 18	860 - 875	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA UTRA FDD Band XIX or E-UTRA Band 19	875 - 890	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA UTRA FDD Band XX or E-UTRA Band 20	791 - 821	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA E-UTRA Band 24	1525 – 1559	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA UTRA FDD Band XXI or E-UTRA Band 21	1495.9 – 1510.9	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA UTRA FDD Band XXII or E-UTRA Band 22	3510 – 3590	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA E-UTRA Band 23	2180-2200	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA UTRA FDD Band XXV or E-UTRA Band 25	1930 – 1995	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA UTRA FDD Band XXVI or E-UTRA Band 26	859 – 894	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA E-UTRA Band 27	852 - 869	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA E-UTRA Band 28	758 – 803	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA E-UTRA Band 29	717 – 728	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA UTRA TDD Band a) or E-UTRA in Band 33	1900-1920	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA UTRA TDD Band a) or E-UTRA in Band 34	2010-2025	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA UTRA TDD Band b) or E-UTRA in Band 35	1850-1910	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier
WA UTRA TDD Band b) or E-UTRA in Band 36	1930-1990	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier

## Table 7.6-3: Blocking performance requirement for E-UTRA Wide Area BS when co-located with BS in other frequency bands.

WA UTRA	A TDD Band c) or	1910-1930	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier		
	A TDD Band d) or	2570-2620	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier		
WA UTRA E-UTRA E	A TDD Band f) or Band 39	1880-1920	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier		
WA UTRA E-UTRA E	A TDD Band e) or Band 40	2300-2400	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier		
WA E-UT	RA Band 41	2496-2690	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier		
WA E-UT	RA Band 42	3400 - 3600	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier		
WA E-UT	RA Band 43	3600 - 3800	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier		
WA E-UT	RA Band 44	703-803	+16	P <sub>REFSENS</sub> + 6dB*	CW carrier		
Note*:	Note*: PREFSENS is related to the channel bandwidth and specified in TS 36.104 [2] subclause 7.2.1.						
NOTE 1:				nts do not apply when t			
		le any of the support		coperating band or in th	ne to MHZ		
					ring signal		
	For a BS operating in band 13 the requirements do not apply when the interfering signal falls within the frequency range 768-797 MHz.						
				o not apply when the in	terfering		
			•	ands and the Base Stati	•		
	synchronized.		in it op or a mig we				
NOTE 2:		ns of bands may not l	be possible to co	site based on the requ	irements		
	above. The current state-of-the-art technology does not allow a single generic solution for co-location of UTRA TDD or E-UTRA TDD with E-UTRA FDD on adjacent frequencies						
				here are certain site-en	-		
		1 0		-			
solutions that can be used. These techniques are addressed in TR 25.942 [11].							

Co-located BS type	Centre Frequency of Interfering Signal (MHz)	Interfering Signal mean power (dBm)	Wanted Signal mean power (dBm)	Type of Interfering Signal
Pico GSM850	869 - 894	-7	P <sub>REFSENS</sub> + 6dB*	CW carrier
Pico GSM900	921 – 960	-7	P <sub>REFSENS</sub> + 6dB*	CW carrier
Pico DCS1800	1805 - 1880	-4	P <sub>REFSENS</sub> + 6dB*	CW carrier
Pico PCS1900	1930 - 1990	-4	P <sub>REFSENS</sub> + 6dB*	CW carrier
LA UTRA FDD Band I or E-				
UTRA Band 1	2110 – 2170	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
LA UTRA FDD Band II or E-UTRA Band 2	1930 – 1990	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
LA UTRA FDD Band III or E-UTRA Band 3	1805 – 1880	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
LA UTRA FDD Band IV or E-UTRA Band 4	2110 – 2155	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
LA UTRA FDD Band V or E-UTRA Band 5	869 - 894	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
LA UTRA FDD Band VI or E-UTRA Band 6	875 – 885	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
LA UTRA FDD Band VII or E-UTRA Band 7	2620 – 2690	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
LA UTRA FDD Band VIII or	925 – 960	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
E-UTRA Band 8 LA UTRA FDD Band IX or	1844.9 – 1879.9	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
E-UTRA Band 9 LA UTRA FDD Band X or	2110 - 2170	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
E-UTRA Band 10 LA UTRA FDD Band XI or	1475.9 - 1495.9	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
E-UTRA Band 11 LA UTRA FDD Band XII or	729 - 746	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
E-UTRA Band 12 LA UTRA FDD Band XIIII	746 - 756	-6		CW carrier
or E-UTRA Band 13 LA UTRA FDD Band XIV			P <sub>REFSENS</sub> + 6dB*	
or E-UTRA Band 14	758 - 768	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
LA E-UTRA Band 17	734 - 746	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
LA E-UTRA Band 18	860 - 875	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
LA UTRA FDD Band XIX or E-UTRA Band 19	875 - 890	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
LA UTRA FDD Band XX or E-UTRA Band 20	791 - 821	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
LA UTRA FDD Band XXI or E-UTRA Band 21	1495.9 – 1510.9	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
LA UTRA FDD Band XXII	3510 – 3590	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
or E-UTRA Band 22	2120 2200	6	Decome L 6dD*	CW corrier
LA E-UTRA Band 23 LA E-UTRA Band 24	2180-2200 1525 - 1559	-6 -6	P <sub>REFSENS</sub> + 6dB* P <sub>REFSENS</sub> + 6dB*	CW carrier CW carrier
LA UTRA FDD Band XXV	1930 – 1995	-0 -6	P <sub>REFSENS</sub> + 6dB*	CW carrier
or E-UTRA Band 25 LA UTRA FDD Band XXVI		-6		
or E-UTRA Band 26	859 - 894		P <sub>REFSENS</sub> + 6dB*	CW carrier
LA E-UTRA Band 27	852 - 869	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
LA E-UTRA Band 28	758 – 803	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
LA E-UTRA Band 29	717 – 728	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
LA UTRA TDD Band a) or E-UTRA Band 33	1900-1920	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
LA UTRA TDD Band a) or E-UTRA Band 34	2010-2025	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
LA UTRA TDD Band b) or E-UTRA Band 35	1850-1910	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
LA UTRA TDD Band b) or E-UTRA Band 36	1930-1990	-6	PREFSENS + 6dB*	CW carrier
LA UTRA TDD Band c) or	1910-1930	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier
			· ILLI OLING · OUD	0041101

## Table 7.6-4: Blocking performance requirement for Local Area BS when co-located with BS in other frequency bands.

	1	r	1				
E-UTRA Band 37							
LA UTRA TDD in Band d)	2570-2620	-6	PREESENS + 6dB*	CW carrier			
or E-UTRA Band 38	2570-2020	-0	FREESENS + OUB	CW camer			
LA UTRA TDD in Band f)	1880-1920	-6		CW carrier			
or E-UTRA Band 39	1000-1920	-0	P <sub>REFSENS</sub> + 6dB*	Cw camer			
LA UTRA TDD in Band e)	0000 0400	0					
or E-UTRA Band 40	2300-2400	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier			
LA E-UTRA Band 41	2496-2690	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier			
LA E-UTRA Band 42	3400 - 3600	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier			
LA E-UTRA Band 43	3600 - 3800	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier			
LA E-UTRA Band 44	703-803	-6	P <sub>REFSENS</sub> + 6dB*	CW carrier			
Note*: PREFSENS is related	d to the channel band	width and specif	fied in TS 36.104 [2] su	bclause			
7.2.1.							
NOTE 1: Except for a BS of	perating in Band 13,	these requireme	nts do not apply when t	the			
			coperating band or in the				
	de any of the support						
	For a BS operating in band 13 the requirements do not apply when the interfering signal						
	quency range 768-79		,	5 5			
			o not apply when the in	terferina			
			ands and the Base Stat				
synchronized.		J					
5	,						
	above. The current state-of-the-art technology does not allow a single generic solution for						
	co-location of UTRA TDD or E-UTRA TDD with E-UTRA FDD on adjacent frequencies for						
			are certain site-enginee				
			essed in TR 25.942 [11				
				1.			

MICCOURT GSM850         #69 = 894         +8         PREFERS + 6dB*         CW carrier           MICROVIR DCS1800         1805 - 1880         +8         PREFERS + 6dB*         CW carrier           MICROVIR DCS1900         1930 - 1990         +8         PREFERS + 6dB*         CW carrier           MICROVIR PCS1900         1930 - 1990         +8         PREFERS + 6dB*         CW carrier           MICROVIR PCS1900         1930 - 1990         +8         PREFERS + 6dB*         CW carrier           MI UTRA FDD Band I or         1930 - 1990         +8         PREFERS + 6dB*         CW carrier           MI UTRA FDD Band V or         2110 - 2155         +8         PREFERS + 6dB*         CW carrier           MI UTRA FDD Band V or         2110 - 2155         +8         PREFERS + 6dB*         CW carrier           MI UTRA FDD Band V or         2110 - 2155         +8         PREFERS + 6dB*         CW carrier           MI UTRA FDD Band V or         2620 - 2690         +8         PREFERS + 6dB*         CW carrier           MR UTRA FDD Band VII or         2620 - 2690         +8         PREFERS + 6dB*         CW carrier           MR UTRA FDD Band XI or         1844.9 - 1879.9         +8         PREFERS + 6dB*         CW carrier           MR UTRA FDD Band XI or	Co-located BS type	Centre Frequency of Interfering Signal (MHz)	Interfering Signal mean power (dBm)	Wanted Signal mean power (dBm)	Type of Interfering Signal
Micro/MR GSM900         921 - 960         +8         Paresens + 6dB*         CW carrier           Micro/MR PCS1900         1805 - 1880         +8         Paresens + 6dB*         CW carrier           MICO/MR PCS1900         1930 - 1990         +8         Paresens + 6dB*         CW carrier           MR UTRA FDD Band II or         2110 - 2170         +8         Paresens + 6dB*         CW carrier           MR UTRA FDD Band II or         1930 - 1990         +8         Paresens + 6dB*         CW carrier           MR UTRA FDD Band V or         2110 - 2155         +8         Paresens + 6dB*         CW carrier           MR UTRA FDD Band V or         2110 - 2155         +8         Paresens + 6dB*         CW carrier           MR UTRA FDD Band V or         869 - 894         +8         Paresens + 6dB*         CW carrier           MR UTRA FDD Band VI or         2620 - 2690         +8         Paresens + 6dB*         CW carrier           MR UTRA FDD Band VI or         252 - 960         +8         Paresens + 6dB*         CW carrier           HW UTRA FDD Band XI or         2110 - 2170         +8         Paresens + 6dB*         CW carrier           HW UTRA FDD Band XI or         2110 - 2170         +8         Paresens + 6dB*         CW carrier           HW UTRA FDD Band XI or </td <td>Micro/MR GSM850</td> <td></td> <td></td> <td>PRESENS + 6dB*</td> <td>CW carrier</td>	Micro/MR GSM850			PRESENS + 6dB*	CW carrier
MicroVIR DCS1800         1805 - 1880         +8         PREFERS + 6dB*         CW carrier           MICOVIR PCS1900         1930 - 1990         +8         PREFERS + 6dB*         CW carrier           MR UTRA FDD Band I or E-UTRA Band 1         2110 - 2170         +8         PREFERS + 6dB*         CW carrier           MR UTRA FDD Band II or E-UTRA Band 2         1930 - 1990         +8         PREFERS + 6dB*         CW carrier           MR UTRA FDD Band II or E-UTRA Band 3         1805 - 1880         +8         PREFERS + 6dB*         CW carrier           MR UTRA FDD Band IV or E-UTRA Band 4         2110 - 2155         +8         PREFERS + 6dB*         CW carrier           MR UTRA FDD Band Vor E-UTRA Band 5         869 - 894         +8         PREFERS + 6dB*         CW carrier           MR UTRA FDD Band Vor E-UTRA Band 7         2620 - 2690         +8         PREFERS + 6dB*         CW carrier           MR UTRA FDD Band VII or E-UTRA Band 1         2620 - 2690         +8         PREFERS + 6dB*         CW carrier           MR UTRA FDD Band XVII         2620 - 2690         +8         PREFERS + 6dB*         CW carrier           MR UTRA FDD Band XVII         1844.9 - 1879.9         +8         PREFERS + 6dB*         CW carrier           MR UTRA FDD Band XII or E-UTRA Band 12         729 - 746         +8					
MicroWR PCS1900         1930 - 1990         +8         PREFERS + 6dB*         CW carrier           IRW UTRA FDD Band I or E-UTRA Band 2         2110 - 2170         +8         PREFERS + 6dB*         CW carrier           IRW UTRA FDD Band III or E-UTRA Band 2         1930 - 1990         +8         PREFERS + 6dB*         CW carrier           IRW UTRA FDD Band III or E-UTRA Band 2         1805 - 1880         +8         PREFERS + 6dB*         CW carrier           IRW UTRA FDD Band Vor E-UTRA Band 4         2110 - 2155         +8         PREFERS + 6dB*         CW carrier           IRW UTRA FDD Band Vor E-UTRA Band 5         869 - 894         +8         PREFERS + 6dB*         CW carrier           IRW UTRA FDD Band Vor E-UTRA Band 6         875 - 885         +8         PREFERS + 6dB*         CW carrier           IRW UTRA FDD Band VII or E-UTRA Band 6         226 - 2690         +8         PREFERS + 6dB*         CW carrier           IRW UTRA FDD Band XI or E-UTRA Band 10         225 - 960         +8         PREFERS + 6dB*         CW carrier           IRW UTRA FDD Band XI or E-UTRA Band 10         1844.9 - 1879.9         +8         PREFERS + 6dB*         CW carrier           IRW UTRA FDD Band XI or E-UTRA Band 11         1475.9 -1495.9         +8         PREFERS + 6dB*         CW carrier           IRW UTRA FDD Band XII or E-UTRA B			-		
INR_UTRA_FDD Band I or E-UTRA Band 1         2110 - 2170         +8         PREFSENS + 6dB*         CW carrier           INR_UTRA_FDD Band II or E-UTRA Band 2         1930 - 1990         +8         PREFSENS + 6dB*         CW carrier           INR_UTRA_FDD Band III or E-UTRA Band 3         1805 - 1880         +8         PREFSENS + 6dB*         CW carrier           INR_UTRA_FDD Band IV or E-UTRA Band 4         2110 - 2155         +8         PREFSENS + 6dB*         CW carrier           INR_UTRA_FDD Band IV or E-UTRA Band 6         869 - 894         +8         PREFSENS + 6dB*         CW carrier           INR_UTRA_FDD Band VI or E-UTRA Band 6         875 - 885         +8         PREFSENS + 6dB*         CW carrier           INR_UTRA_FDD Band VII or E-UTRA Band 9         2250 - 960         +8         PREFSENS + 6dB*         CW carrier           INR_UTRA_FDD Band VII or E-UTRA Band 10         1844.9 - 1879.9         +8         PREFSENS + 6dB*         CW carrier           INR_UTRA_FDD Band X or E-UTRA Band 10         1475.9 -1495.9         +8         PREFSENS + 6dB*         CW carrier           INR_UTRA_FDD Band XI or E-UTRA Band 11         746 - 756         +8         PREFSENS + 6dB*         CW carrier           INR_UTRA_FDD Band XI or E-UTRA Band 12         758 - 768         +8         PREFSENS + 6dB*         CW carrier					
E-UTRA Band 1         2110 - 2170         +8         PREFSENS + 6dB*         CW carrier           IMR UTRA FDD Band III or E-UTRA Band 2         1930 - 1990         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band III or E-UTRA Band 3         1805 - 1880         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band V or E-UTRA Band 4         2110 - 2155         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band V or E-UTRA Band 6         869 - 894         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band VI or E-UTRA Band 6         875 - 885         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band VII or E-UTRA Band 8         2620 - 2690         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band VII or E-UTRA Band 8         2620 - 2690         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band X or E-UTRA Band 10         1844.9 - 1879.9         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band X or E-UTRA Band 10         2110 - 2170         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band XII or E-UTRA Band 11         1475.9 - 1495.9         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band XII or		1930 - 1990	+0	FREFSENS + OUD	CW carrier
E-UTRA Band 2         1930 - 1990         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band III or E-UTRA Band 3         1805 - 1880         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band IV or E-UTRA Band 4         2110 - 2155         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band V or E-UTRA Band 5         869 - 894         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band VI or E-UTRA Band 6         875 - 885         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band VII or E-UTRA Band 3         2620 - 2690         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band VII or E-UTRA Band 9         2620 - 2690         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band XII or E-UTRA Band 1X or E-UTRA Band 1X or E-UTRA Band 1X or         1844.9 - 1879.9         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band XI or E-UTRA Band 11         1475.9 - 1495.9         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band XII or E-UTRA Band 12         729 - 746         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band XII or E-UTRA Band 12         734 - 766         +8         PREFSENS + 6dB*         CW carrier <t< td=""><td>E-UTRA Band 1</td><td>2110 – 2170</td><td>+8</td><td>P<sub>REFSENS</sub> + 6dB*</td><td>CW carrier</td></t<>	E-UTRA Band 1	2110 – 2170	+8	P <sub>REFSENS</sub> + 6dB*	CW carrier
E-UTRA Band 3         1805 - 1880         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band IV or E-UTRA Band 4         2110 - 2155         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band V or E-UTRA Band 5         869 - 894         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band VI or E-UTRA Band 6         875 - 885         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band VII or E-UTRA Band 7         2620 - 2690         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band VII or E-UTRA Band 8         925 - 960         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band X or E-UTRA Band 10         1844.9 - 1879.9         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band X or E-UTRA Band 10         2110 - 2170         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band XI or E-UTRA Band 11         1475.9 - 1495.9         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band XI or E-UTRA Band 11         746 - 756         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band XIV or E-UTRA Band 12         758 - 768         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band XIV or E-UTRA	E-UTRA Band 2	1930 – 1990	+8	P <sub>REFSENS</sub> + 6dB*	CW carrier
$\begin{array}{c c c c c c c c c c c c c c c c c c c $		1805 – 1880	+8	P <sub>REFSENS</sub> + 6dB*	CW carrier
IME UTRA FDD Band V or E-UTRA Band 5869 - 894+8 $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band VI or E-UTRA Band 6875 - 885+8 $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band VII or E-UTRA Band 72620 - 2690+8 $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band VII or E-UTRA Band 8925 - 960+8 $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XI or E-UTRA Band 91844.9 - 1879.9+8 $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band X or E-UTRA Band 102110 - 2170+8 $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XI or E-UTRA Band 111475.9 - 1495.9+8 $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XI or E-UTRA Band 11729 - 746+8 $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XII or C E-UTRA Band 12729 - 746+8 $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XIII or E-UTRA Band 13746 - 756+8 $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XIV or E-UTRA Band 14758 - 768+8 $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 13860 - 875+8 $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XXI or E-UTRA Band 12791 - 821+8 $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XXI or E-UTRA Band 211495.9 - 1510.9+8 $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XXII or E-UTRA Band 22150.9 - 1510.9+8 $P_{REFSENS} + 6dB^*$ </td <td></td> <td>2110 – 2155</td> <td>+8</td> <td>P<sub>REFSENS</sub> + 6dB*</td> <td>CW carrier</td>		2110 – 2155	+8	P <sub>REFSENS</sub> + 6dB*	CW carrier
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	MR UTRA FDD Band V or	869 – 894	+8	P <sub>REFSENS</sub> + 6dB*	CW carrier
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	MR UTRA FDD Band VI or	875 – 885	+8	P <sub>REFSENS</sub> + 6dB*	CW carrier
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	MR UTRA FDD Band VII or	2620 – 2690	+8	P <sub>REFSENS</sub> + 6dB*	CW carrier
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $	MR UTRA FDD Band VIII or	925 – 960	+8	P <sub>REFSENS</sub> + 6dB*	CW carrier
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $	MR UTRA FDD Band IX or	1844.9 – 1879.9	+8	P <sub>REFSENS</sub> + 6dB*	CW carrier
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	MR UTRA FDD Band X or	2110 – 2170	+8	P <sub>REFSENS</sub> + 6dB*	CW carrier
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	MR UTRA FDD Band XI or	1475.9 –1495.9	+8	P <sub>REFSENS</sub> + 6dB*	CW carrier
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	MR UTRA FDD Band XII or	729 - 746	+8	P <sub>REFSENS</sub> + 6dB*	CW carrier
MR UTRA FDD Band XIV or E-UTRA Band 14         758 - 768         +8         PREFSENS + 6dB*         CW carrier           MR E-UTRA Band 17         734 - 746         +8         PREFSENS + 6dB*         CW carrier           MR E-UTRA Band 18         860 - 875         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band XIX or E-UTRA Band 19         875 - 890         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band XX or E-UTRA Band 20         791 - 821         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band XXI or E-UTRA Band 21         1495.9 - 1510.9         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band XXI or E-UTRA Band 21         1495.9 - 1510.9         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band XXI or E-UTRA Band 23         2180 - 2200         +8         PREFSENS + 6dB*         CW carrier           MR E-UTRA Band 23         2180 - 2200         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band XXV or E-UTRA Band 24         1525 - 1559         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band XXV or E-UTRA Band 26         1930 - 1995         +8         PREFSENS + 6dB*         CW carrier           MR UTRA FDD Band XXV or E-UTRA Band 26 <t< td=""><td>MR UTRA FDD Band XIIII</td><td>746 - 756</td><td>+8</td><td>P<sub>REFSENS</sub> + 6dB*</td><td>CW carrier</td></t<>	MR UTRA FDD Band XIIII	746 - 756	+8	P <sub>REFSENS</sub> + 6dB*	CW carrier
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$		758 - 768	+8	P <sub>REFSENS</sub> + 6dB*	CW carrier
MR UTRA FDD Band XIX or E-UTRA Band 19 $875 - 890$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XX or E-UTRA Band 20 $791 - 821$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XXI or E-UTRA Band 21 $1495.9 - 1510.9$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XXII or E-UTRA Band 22 $3510 - 3590$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XXII or E-UTRA Band 22 $3510 - 3590$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 23 $2180 - 2200$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XXV or E-UTRA Band 24 $1525 - 1559$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XXV or E-UTRA Band 25 $1930 - 1995$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XXVI or E-UTRA Band 26 $859 - 894$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 27 $852 \cdot 869$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 28 $758 - 803$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 29 $717 - 728$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 33 $1900 - 1920$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 35 $1850 - 1910$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 36 $1930 - 1990$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 36 $1930 - 1990$ $+$	MR E-UTRA Band 17	734 - 746	+8	P <sub>REFSENS</sub> + 6dB*	CW carrier
MR UTRA FDD Band XIX or E-UTRA Band 19 $875 - 890$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XX or E-UTRA Band 20 $791 - 821$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XXI or E-UTRA Band 21 $1495.9 - 1510.9$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XXII or E-UTRA Band 22 $3510 - 3590$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XXII or E-UTRA Band 23 $2180 - 2200$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 24 $1525 - 1559$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XXV or E-UTRA Band 25 $1930 - 1995$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XXVI or E-UTRA Band 26 $1930 - 1995$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XXVI or E-UTRA Band 26 $859 - 894$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 27 $852 \cdot 869$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 28 $758 - 803$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 29 $717 - 728$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 33 $1900 - 1920$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 35 $1850 - 1910$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 36 $1930 - 1990$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 36 $1930 - 1990$	MR E-UTRA Band 18	860 - 875	+8		
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$			+8		CW carrier
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	MR UTRA FDD Band XX or	791 - 821	+8	P <sub>REFSENS</sub> + 6dB*	CW carrier
MR UTRA FDD Band XXII or E-UTRA Band 22 $3510 - 3590$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 23 $2180 - 2200$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 24 $1525 - 1559$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XXV or E-UTRA Band 25 $1930 - 1995$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR UTRA FDD Band XXVI or E-UTRA Band 26 $859 - 894$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 26 $859 - 894$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 27 $852 - 869$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 28 $758 - 803$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 29 $717 - 728$ $+8$ $PREFSENS + 6dB^*$ CW carrierMR E-UTRA Band 33 $1900 - 1920$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 34 $2010 - 2025$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 36 $1930 - 1990$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 36 $1930 - 1990$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 37 $1910 - 1930$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrierMR E-UTRA Band 38 $2570 - 2620$ $+8$ $P_{REFSENS} + 6dB^*$ CW carrier	MR UTRA FDD Band XXI	1495.9 – 1510.9	+8	P <sub>REFSENS</sub> + 6dB*	CW carrier
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	MR UTRA FDD Band XXII	3510 – 3590	+8	P <sub>REFSENS</sub> + 6dB*	CW carrier
$\begin{array}{c c c c c c c c c c c c c c c c c c c $		2180 - 2200	+8	PREFERENC + 6dR*	CW carrier
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $					
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$	MR UTRA FDD Band XXV				
$\begin{array}{c c c c c c c c c c c c c c c c c c c $	MR UTRA FDD Band XXVI	859 – 894	+8	P <sub>REFSENS</sub> + 6dB*	CW carrier
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $		852 - 860	+8	PREFORME + 6dR*	CW carrier
$\begin{array}{c c c c c c c c c c c c c c c c c c c $					
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $					
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $					
MR E-UTRA Band 35         1850-1910         +8         P <sub>REFSENS</sub> + 6dB*         CW carrier           MR E-UTRA Band 36         1930-1990         +8         P <sub>REFSENS</sub> + 6dB*         CW carrier           MR E-UTRA Band 37         1910-1930         +8         P <sub>REFSENS</sub> + 6dB*         CW carrier           MR E-UTRA Band 37         1910-200         +8         P <sub>REFSENS</sub> + 6dB*         CW carrier           MR E-UTRA Band 38         2570-2620         +8         P <sub>REFSENS</sub> + 6dB*         CW carrier					
MR E-UTRA Band 37         1910-1930         +8         P <sub>REFSENS</sub> + 6dB*         CW carrier           MR E-UTRA Band 38         2570-2620         +8         P <sub>REFSENS</sub> + 6dB*         CW carrier					
MR E-UTRA Band 37         1910-1930         +8         P <sub>REFSENS</sub> + 6dB*         CW carrier           MR E-UTRA Band 38         2570-2620         +8         P <sub>REFSENS</sub> + 6dB*         CW carrier	MR F-UTRA Band 36	1930-1990	+8	PRESENC + 6dB*	CW carrier
MR E-UTRA Band 38         2570-2620         +8         P <sub>REFSENS</sub> + 6dB*         CW carrier					
MR E-UTRA Band 39 1880-1920 +8 P <sub>REFSENS</sub> + 6dB* CW carrier					

## Table 7.6-5: Blocking performance requirement for E-UTRA Medium Range BS when co-located with BS in other frequency bands.

MR E-UT	RA Band 40	2300-2400	+8	P <sub>REFSENS</sub> + 6dB*	CW carrier		
MR E-UT	MR E-UTRA Band 41 2496 - 26		+8	P <sub>REFSENS</sub> + 6dB*	CW carrier		
MR E-UT	RA Band 42	3400-3600	+8	P <sub>REFSENS</sub> + 6dB*	CW carrier		
MR E-UT	RA Band 43	3600-3800	+8	P <sub>REFSENS</sub> + 6dB*	CW carrier		
MR E-UT	RA Band 44	703-803	+8	P <sub>REFSENS</sub> + 6dB*	CW carrier		
Note*:	P <sub>REFSENS</sub> is related 7.2.1.	to the channel band	width and specif	ied in TS 36.104 [2] sul	oclause		
NOTE 1:	Except for a BS op	erating in Band 13, t	hese requireme	nts do not apply when t	he		
				operating band or in th			
		e any of the support					
				apply when the interfer	ing signal		
		uency range 768-79					
	•			o not apply when the int	erfering		
	For BS operating in Band 42 or 43, the requirements do not apply when the interfering signal falls within the Band 42 or 43 uplink operating bands and the Base Stations are						
	signal rais within the band 42 of 45 uplink operating bands and the base stations are synchronized.						
NOTE 2	OTE 2: Some combinations of bands may not be possible to co-site based on the requirements						
110122.	above. The current state-of-the-art technology does not allow a single generic solution for						
	co-location of UTRA TDD or E-UTRA TDD with E-UTRA FDD on adjacent frequencies for						
	30dB BS-BS minimum coupling loss. However, there are certain site-engineering						
	solutions that can be used. These techniques are addressed in TR 25.942 [11].						

## 7.7 Receiver spurious emissions

## 7.7.1 Definition and applicability

The spurious emissions power is the power of emissions generated or amplified in a receiver that appear at the BS receiver antenna connector. The requirements apply to all BS with separate RX and TX antenna ports. The test shall be performed when both TX and RX are on, with the TX port terminated.

For TDD BS with common RX and TX antenna port the requirement applies during the Transmitter OFF period. For FDD BS with common RX and TX antenna port the transmitter spurious emission as specified in clause 6.6.4 is valid.

For BS capable of multi-band operation where multiple bands are mapped on separate antenna connectors, the singleband requirements apply and the excluded frequency range is only applicable for the operating band supported on each antenna connector.

## 7.7.2 Minimum Requirements

The minimum requirement is in TS 36.104 [2] subclause 7.7.1.

## 7.7.3 Test purpose

The test purpose is to verify the ability of the BS to limit the interference caused by receiver spurious emissions to other systems.

## 7.7.4 Method of test

#### 7.7.4.1 Initial conditions

Test environment: normal; see subclause D.2.

RF channels to be tested for single carrier: M, see subclause 4.7.

RF bandwidth positions to be tested for multi-carrier and/or CA:  $M_{RFBW}$  in single-band operation, see subclause 4.7.1;  $B_{RFBW}$ -T"<sub>RFBW</sub> and B"<sub>RFBW</sub>-T<sub>RFBW</sub> in multi-band operation, see subclause 4.7.1.

- 1) Connect a measurement receiver to the BS antenna connector as shown in Annex I.2.6.
- 2) Enable the BS receiver.

3) Terminate the BS Tx antenna connector as shown in Annex I.2.6.

#### 7.7.4.2 Procedure

1) For a FDD BS declared to be capable of single carrier operation only, start BS transmission according to E-TM 1.1 at manufacturer's declared rated output power.

For a FDD BS declared to be capable of multi-carrier and/or CA operation, set the BS to transmit according to E-TM 1.1 on all carriers configured using the applicable test configuration and corresponding power setting specified in sub-clause 4.10 and 4.11.

- 2) Set measurement equipment parameters as specified in table 7.7-1.
- 3) Measure the spurious emissions over each frequency range described in subclause 7.7.5.
- 4) Repeat the test for the Rx port(s), which was (were) terminated.

In addition, for a multi-band capable BS, the following steps shall apply:

- 5) For multi-band capable BS and single band tests, repeat the steps above per involved band where single band test configurations and test models shall apply with no carrier activated in the other band.
- 6) For multi-band capable BS with separate antenna connector, the antenna connector not being under test in case of single-band or multi-band test shall be terminated.

## 7.7.5 Test requirements

The power of any spurious emission shall not exceed the levels in Table 7.7-1.

In addition to the requirements in Table 7.7-1, the power of any spurious emission shall not exceed the levels specified for Protection of the E-UTRA FDD BS receiver of own or different BS in Clause 6.6.4.5.3 and for Co-existence with other systems in the same geographical area in Clause 6.6.4.5.4. In addition, the co-existence requirements for co-located base stations specified in subclause 6.6.4.5.5 may also be applied.

Frequency range	Maximum level	Measurement Bandwidth	Note
30MHz - 1 GHz	-57 dBm	100 kHz	
1 GHz - 12.75 GHz	-47 dBm	1 MHz	
12.75 GHz - 5 <sup>th</sup> harmonic of the upper frequency edge of the UL operating band in GHz	-47 dBm	1 MHz	Applies only for Bands 22, 42 and 43.
2.5 * BW <sub>Channel</sub> al channel bandwid However, freque supported downl of the BS suppor requirement. For BS capable of supported operation	bove the last ca lth according to ncies that are m ink operating ba ted downlink op of multi-band op ting bands. For irate antenna co ncy range is only	rrier frequency transm Table 5.6-1, may be e ore than 10 MHz belo and or more than 10 M erating band (see Tal eration, the excluded BS capable of multi-b nnectors, the single-b	he first carrier frequency and hitted by the BS, where BW <sub>Channel</sub> is the excluded from the requirement. by the lowest frequency of any of the BS MHz above the highest frequency of any ble 5.5-1) shall not be excluded from the frequency range applies for all and operation where multiple bands are band requirements apply and the berating band supported on each

Table 7.7-1: General spurious emission test requirement

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The relationship between Minimum Requirements and Test Requirements is defined in subclause 4.1 and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

## 7.8 Receiver intermodulation

## 7.8.1 Definition and applicability

Third and higher order mixing of the two interfering RF signals can produce an interfering signal in the band of the desired channel. Intermodulation response rejection is a measure of the capability of the receiver to receive a wanted signal on its assigned channel frequency in the presence of two interfering signals which have a specific frequency relationship to the wanted signal. Interfering signals shall be a CW signal and an E-UTRA signal as specified in Annex C.

## 7.8.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 7.8.1.

## 7.8.3 Test purpose

The test purpose is to verify the ability of the BS receiver to inhibit the generation of intermodulation products in its non-linear elements caused by the presence of two high-level interfering signals at frequencies with a specific relationship to the frequency of the wanted signal.

## 7.8.4 Method of test

#### 7.8.4.1 Initial conditions

Test environment: normal; see subclause D.2.

RF channels to be tested for single carrier: B, M and T; see subclause 4.7.

RF bandwidth positions to be tested for multi-carrier and/or CA:  $B_{RFBW}$  and  $T_{RFBW}$  in single-band operation, see subclause 4.7.1;  $B_{RFBW}$  and  $B''_{RFBW}$  and  $B''_{RFBW}$  in multi-band operation, see subclause 4.7.1.

1) Set-up the measurement system as shown in Annex I.2.7.

#### 7.8.4.2 Procedures

- 1) Generate the wanted signal using the applicable test configuration specified in subclause 4.10 and 4.11 and adjust the signal level to the BS under test to the level specified in Table 7.8-1.
- 2) Adjust the signal generators to the type of interfering signals, levels and the frequency offsets as specified in Table 7.8-2 for intermodulation requirement and Table 7.8-3, Table 7.8-4, Table 7.8-5 and Table 7.8-6 for narrowband intermodulation requirement.
- 3) Adjust the signal generators to obtain the specified level of interfering signal at the BS input.
- 4) Measure the throughput according to Annex E, for multi-carrier and/or CA operation the throughput shall be measured for relevant carriers specified by the test configuration specified in subclause 4.10 and 4.11.
- 5) Repeat the test for the port(s) which was (were) terminated.

In addition, for a multi-band capable BS with separate antenna connectors, the following steps shall apply:

6) For single band tests, repeat the steps above per involved band where single band test configurations shall apply with no carrier activated in the other band.

- 7) The interfering signal shall first be applied on the same port as the wanted signal. The test shall be repeated with the interfering signal applied on the other port (if any) mapped to the same receiver as the wanted signal. Any antenna connector with no signal applied in case of single-band or multi-band test shall be terminated.
- 8) Repeat step 7) with the wanted signal for the other band(s) applied on the respective port(s).

## 7.8.5 Test requirements

For each measured E-UTRA carrier, the throughput shall be  $\geq$  95% of the maximum throughput of the reference measurement channel, with a wanted signal at the assigned channel frequency and two interfering signals with the conditions specified in Table 7.8-1 and Table 7.8-2 for intermodulation performance and in Table 7.8-3, Table 7.8-4, Table 7.8-5 and Table 7.8-6 for narrowband intermodulation performance. The reference measurement channel for the wanted signal is specified in Table 7.2-1, Table7.2-2, Table 7.2-3 and Table 7.2-4 for each channel bandwidth and further specified in Annex A.

The receiver intermodulation requirement is applicable outside the Base Station RF bandwidth or maximum radio bandwidth edges. The interfering signal offset is defined relative to the lower (upper) or maximum radio bandwidth edges.

For a BS operating in non-contiguous spectrum within any operating band, the narrowband intermodulation requirement applies in addition inside any sub-block gap in case the sub-block gap is at least as wide as the channel bandwidth of the E-UTRA interfering signal in Table 7.8-3. The interfering signal offset is defined relative to the sub-block edges inside the sub-block gap. The requirement applies separately for both sub-blocks.

For a BS capable of multi-band operation, the intermodulation requirement applies in addition inside any inter RF bandwidth gap, in case the gap size is at least twice as wide as the E-UTRA interfering signal centre frequency offset from the RF bandwidth edge.

For a BS capable of multi-band operation, the narrowband intermodulation requirement applies in addition inside any inter RF bandwidth gap in case the gap size is at least as wide as the E-UTRA interfering signal in Tables 7.8-3, 7.8-4 and 7.8-6. The interfering signal offset is defined relative to the RF bandwidth edges inside the inter RF bandwidth gap.

BS type	Wanted signal mean power [dBm]	Interfering signal mean power [dBm]	Type of interfering signal	
Wide Area BS	P <sub>REFSENS</sub> + 6dB*	-52		
Medium Range BS	P <sub>REFSENS</sub> + 6dB*	-47		
Local Area BS	P <sub>REFSENS</sub> + 6dB*	-44	See Table 7.8-2	
Home BS P <sub>REFSENS</sub> + 14dB*		-36		
Note*: PREFSENS depends on the channel bandwidth as specified in TS 36.104 [2] subclause 7.2.1. For E-UTRA channel bandwidths 10, 15 and 20 MHz this requirement shall apply only for a FRC A1-3 mapped to the frequency range at the channel edge adjacent to the interfering signals.				

#### Table 7.8-1: Intermodulation performance requirement

E-UTRA channel bandwidth of the lowest (highest) carrier received [MHz]	Interfering signal centre frequency offset from the lower (upper) edge [MHz]	Type of interfering signal
1.4	±2.1	CW
1.4	±4.9	1.4MHz E-UTRA signal
3	±4.5	CW
5	±10.5	3MHz E-UTRA signal
5	±7.5	CW
5	±17.5	5MHz E-UTRA signal
10	±7. 375	CW
10	±17.5	5MHz E-UTRA signal
15	±7.25	CW
15	±17.5	5MHz E-UTRA signal
20	±7.125	CW
20	±17.5	5MHz E-UTRA signal

## Table 7.8-2: Interfering signal for Intermodulation performance requirement

E-UTRA channel bandwidth of the lowest (highest) carrier received [MHz]	Wanted signal mean power [dBm]	Interfering signal mean power [dBm]	Interfering RB centre frequency offset from the lower (upper) edge or sub-block edge inside a sub-block gap [kHz]	Type of interfering signal
		-52	±270	CW
1.4	P <sub>REFSENS</sub> + 6dB*	-52	±790	1.4 MHz E-UTRA signal, 1 RB**
		-52	±270	CW
3	P <sub>REFSENS</sub> + 6dB*	-52	±780	3.0 MHz E-UTRA signal, 1 RB**
_		-52	±360	CW
5	P <sub>REFSENS</sub> + 6dB*	-52	±1060	5 MHz E-UTRA signal, 1 RB**
10	P <sub>REFSENS</sub> + 6dB*	-52	±325	CW
10	(***)	-52	±1240	5 MHz E-UTRA signal, 1 RB**
15	PREFSENS + 6dB*	-52	±380	CW
15	(***)	-52	±1600	5MHz E-UTRA signal, 1 RB**
	20 P <sub>REFSENS</sub> + 6dB* (***)	-52	±345	CW
		-52	±1780	5MHz E-UTRA signal, 1 RB**
<ul> <li>Note*: P<sub>REFSENS</sub> is related to the channel bandwidth as specified in TS 36.104 [2] subclause 7.2.1.</li> <li>Note**: Interfering signal consisting of one resource block positioned at the stated offset, the channel bandwidth of the interfering signal is located adjacently to the lower (upper) edge.</li> <li>Note***: This requirement shall apply only for a FRC A1-3 mapped to the frequency range at the channel edge adjacent to the interfering signals</li> </ul>				

E-UTRA channel bandwidth of the lowest (highest) carrier received [MHz]	Wanted signal mean power [dBm]	Interfering signal mean power [dBm]	Interfering RB centre frequency offset from the lower (upper) edge or sub-block edge inside a sub-block [kHz]	Type of interfering signal
1.4		-44	±270	CW
1.4	P <sub>REFSENS</sub> + 6dB*	-44	±790	1.4 MHz E-UTRA signal, 1 RB**
		-44	±275	CW
3	P <sub>REFSENS</sub> + 6dB*	-44	±790	3.0 MHz E-UTRA signal, 1 RB**
-		-44	±360	CW
5	P <sub>REFSENS</sub> + 6dB*	-44	±1060	5 MHz E-UTRA signal, 1 RB**
10	P <sub>REFSENS</sub> + 6dB*	-44	±415	CW
10	(***)	-44	±1420	5 MHz E-UTRA signal, 1 RB**
15	15 P <sub>REFSENS</sub> + 6dB* (***)	-44	±380	CW
15		-44	±1600	5MHz E-UTRA signal, 1 RB**
20	20 P <sub>REFSENS</sub> + 6dB* (***)	-44	±345	CW
20		-44	±1780	5MHz E-UTRA signal, 1 RB**

Table 7.8-4: Narrowband intermodulation	performance req	uirement for Local Ar	ea BS
Table 7.0-4. Nanowband Intermodulation	periormance req	function Local Ar	

Note\*: Note\*\*: PREFSENS is related to the channel bandwidth as specified in TS 36.104 [2] subclause 7.2.1.

Interfering signal consisting of one resource block positioned at the stated offset, the channel bandwidth of the interfering signal is located adjacently to the lower (upper) edge.

Note\*\*\*: This requirement shall apply only for a FRC A1-3 mapped to the frequency range at the channel edge adjacent to the interfering signals

E-UTRA channel bandwidt [MHz]	Wanted signal mean	Interfering signal mean power [dBm]	Interfering RB centre frequency offset from the channel edge of the wanted signal [kHz]	Type of interfering signal	
		-36	270	CW	
1.4	P <sub>REFSENS</sub> + 14dB*	-36	790	1.4 MHz E-UTRA signal, 1 RB**	
		-36	270	CW	
3	P <sub>REFSENS</sub> + 14dB*	-36	780	3.0 MHz E-UTRA signal, 1 RB**	
		-36	360	CW	
5	P <sub>REFSENS</sub> + 14dB*	-36	1060	5 MHz E-UTRA signal, 1 RB**	
		-36	325	CW	
10	P <sub>REFSENS</sub> + 14dB* (***)	-36	1240	5 MHz E-UTRA signal, 1 RB**	
		-36	380	CW	
15	P <sub>REFSENS</sub> + 14dB* (***)	-36	1600	5MHz E-UTRA signal, 1 RB**	
		-36	345	CW	
20	P <sub>REFSENS</sub> + 14dB* (***)	-36	1780	5MHz E-UTRA signal, 1 RB**	
Note*: Note**: Note***:	ote**: Interfering signal consisting of one resource block positioned at the stated offset, the channel bandwidth of the interfering signal is located adjacently to the channel bandwidth of the wanted signal.				

Table 7.8-5: Narrowband intermodulation	performance req	uirement for Home BS
Table 1.0-5. Natiowballd intermodulation	periormance rec	

E-UTRA channel bandwidth of the lowest (highest) carrier received [MHz]	Wanted signal mean power [dBm]	Interfering signal mean power [dBm]	Interfering RB centre frequency offset to the lower (higher) edge or sub-block edge inside a sub-block gap [kHz]	Type of interfering signal	
		-47	±270	CW	
1.4	P <sub>REFSENS</sub> + 6dB*	-47	±790	1.4 MHz E-UTRA signal, 1 RB**	
		-47	±270	CW	
3	P <sub>REFSENS</sub> + 6dB*	-47	±780	3.0 MHz E-UTRA signal, 1 RB**	
		-47	±360	CW	
5	P <sub>REFSENS</sub> + 6dB*	-47	±1060	5 MHz E-UTRA signal, 1 RB**	
		-47	±325	CW	
10	P <sub>REFSENS</sub> + 6dB* (***)	-47	±1240	5 MHz E-UTRA signal, 1 RB**	
	P <sub>REFSENS</sub> + 6dB*	-47	±380	CW	
15	(***)	-47	±1600	5MHz E-UTRA signal, 1 RB**	
	P <sub>REFSENS</sub> + 6dB*	-47	±345	CW	
20	20 (***)	-47	±1780	5MHz E-UTRA signal, 1 RB**	
Note**: In tl Note***:	Note**: Interfering signal consisting of one resource block positioned at the stated offset, the channel bandwidth of the interfering signal is located adjacently to the lower (higher) edge.				

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The relationship between Minimum Requirements and Test Requirements is defined in subclause 4.1 and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

## 8 Performance requirement

## 8.1 General

Performance requirements are specified for a number of test environments and multipath channel classes.

Unless stated otherwise, performance requirements apply for a single carrier only. Performance requirements for a BS supporting carrier aggregation are defined in terms of single carrier requirements. The requirements only apply to those measurement channels that are supported by the base station.

The performance requirements for High Speed Train conditions defined in Annex B.3 are optional.

The performance requirements for UL timing adjustment scenario 2 defined in Annex B.4 are optional.

For BS with receiver antenna diversity the required SNR shall be applied separately at each antenna port.

In tests performed with signal generators a synchronization signal may be provided, from the base station to the signal generator, to enable correct timing of the wanted signal.

For tests in clause 8 the transmitter may be off.

## 8.2 Performance requirements for PUSCH

# 8.2.1 Performance requirements of PUSCH in multipath fading propagation conditions transmission on single antenna port

#### 8.2.1.1 Definition and applicability

The performance requirement of PUSCH is determined by a minimum required throughput for a given SNR. The required throughput is expressed as a fraction of maximum throughput for the FRCs listed in Annex A. The performance requirements assume HARQ re-transmissions.

A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths and not supporting carrier aggregation only the tests for the lowest and the highest channel bandwidths supported by the BS are applicable.

For a BS supporting carrier aggregation only the CC combination with largest aggregated bandwidth and the largest number of component carriers is used for the test. For this CC combination the tests using full PRB allocation FRC are conducted on per CC basis and measured by the required SNR levels corresponding to the bandwidths used on the different CCs.

For a BS supporting carrier aggregation the tests with single PRB FRC are conducted on any single component carrier only.

#### 8.2.1.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.2.1.1.

#### 8.2.1.3 Test Purpose

The test shall verify the receiver's ability to achieve throughput under multipath fading propagation conditions for a given SNR.

#### 8.2.1.4 Method of test

#### 8.2.1.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7.

1) Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.2.

#### 8.2.1.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth, defined in Table 8.2.1.4.2-1.

Table 8.2.1.4.2-1: AWGN power level at the BS input

Channel bandwidth [MHz]	AWGN power level
1.4	-92.7dBm / 1.08MHz
3	-88.7dBm / 2.7MHz
5	-86.5dBm / 4.5MHz
10	-83.5dBm / 9MHz
15	-81.7dBm / 13.5MHz
20	-80.4dBm / 18MHz

2) The characteristics of the wanted signal shall be configured according to the corresponding UL reference measurement channel defined in annex A and the test parameters in Table 8.2.1.4.2-2. For reference channels using 1 resource block the resource block in the middle of the channel bandwidth shall be used. In case the number of resource blocks in the channel bandwidth are even the one in the middle with lower number is to be used for testing.

Table 8.2.1.4.2-2 Test	t parameters for	testing PUSCH
------------------------	------------------	---------------

Parameter	Value
Maximum number of HARQ transmissions	4
RV sequence	0, 2, 3, 1, 0, 2, 3, 1
Uplink-downlink allocation for TDD	Configuration 1 (2:2)

- 3) The multipath fading emulators shall be configured according to the corresponding channel model defined in annex B.
- 4) Adjust the equipment so that required SNR specified in Table 8.2.1.5-1 to 8.2.1.5-6 is achieved at the BS input.
- 5) For each of the reference channels in Table 8.2.1.5-1 to 8.2.1.5-6 applicable for the base station, measure the throughput, according to annex E.

#### 8.2.1.5 Test Requirement

The throughput measured according to subclause 8.2.1.4.2 shall not be below the limits for the SNR levels specified in Table 8.2.1.5-1 to 8.2.1.5-6.

Number of TX antennas	Number of RX antennas	Cyclic prefix	Propagation conditions and correlation matrix (Annex B)	FRC (Annex A)	Fraction of maximum throughput	SNR [dB]
1	2	Normal	EPA 5Hz Low	A3-2	30%	-3.5
					70%	0.7
				A4-3	70%	11.2
				A5-2	70%	18.3
			EVA 5Hz Low	A3-1	30%	-2.1
					70%	2.4
				A4-1	30%	5.0
					70%	11.9
				A5-1	70%	19.2
			EVA 70Hz	A3-2	30%	-3.3
			Low		70%	1.3
				A4-3	30%	4.6
					70%	12.5
			ETU 70Hz*	A3-1	30%	-1.8
			Low		70%	3.0
			ETU 300Hz*	A3-1	30%	-1.6
			Low		70%	3.5
		Extended	ETU 70Hz*	A4-2	30%	5.4
			Low		70%	14.1
	4	Normal	EPA 5Hz Low	A3-2	30%	-6.0
			-		70%	-2.5
				A4-3	70%	7.7
		A5-2EVA 5Hz LowA3-1		A5-2	70%	15.0
			A3-1	30%	-4.4	
					70%	-0.7
				A4-1	30%	1.9
					70%	8.4
				A5-1	70%	16.0
			EVA 70Hz	A3-2	30%	-5.7
			Low		70%	-2.1
				A4-3	30%	1.4
					70%	8.9
			ETU 70Hz*	A3-1	30%	-4.2
			Low		70%	-0.4
			ETU 300Hz*	A3-1	30%	-4.0
			Low		70%	0.0
		Extended	ETU 70Hz*	A4-2	30%	2.2
			Low		70%	10.5
Note*: Not applica	able for Local Area	BS and Home BS			·	

Table 8.2.1.5-1 Test requirements for PUSCH, 1.4 MHz Channel Bandwidth

Number of TX antennas	Number of RX antennas	Cyclic prefix	Propagation conditions and correlation matrix (Annex B)	FRC (Annex A)	Fraction of maximum throughput	SNR [dB]
1	2	Normal	EPA 5Hz Low	A3-3	30%	-3.5
				F	70%	0.7
				A4-4	70%	11.5
				A5-3	70%	18.7
			EVA 5Hz Low	A3-1	30%	-2.2
				_	70%	2.4
				A4-1	30%	4.9
				_	70%	12.1
				A5-1	70%	19.4
			EVA 70Hz	A3-3	30%	-3.4
			Low	Γ	70%	1.2
				A4-4	30%	5.3
				····	70%	13.1
			ETU 70Hz*	0Hz* A3-1	30%	-1.9
			Low		70%	3.0
		ETU 300Hz* Low	A3-1	30%	-1.6	
				70%	3.5	
		Extended	ETU 70Hz*	A4-2	30%	5.3
			Low		70%	14.1
	4	Normal	EPA 5Hz Low	A3-3	30%	-6.2
					70%	-2.8
				A4-4	70%	8.3
				A5-3	70%	15.0
			EVA 5Hz Low	A3-1	30%	-4.4
					70%	-0.7
				A4-1	30%	1.8
					70%	8.4
				A5-1	70%	16.0
			EVA 70Hz	A3-3	30%	-5.9
			Low		70%	-2.3
				A4-4	30%	2.2
					70%	9.3
			ETU 70Hz*	A3-1	30%	-4.2
			Low		70%	-0.3
			ETU 300Hz*	A3-1	30%	-4.0
			Low		70%	0.0
		Extended	ETU 70Hz*	A4-2	30%	2.1
	cable for Local Are		Low		70%	10.5

Table 8.2.1.5-3 Test requirements for PUSCH, 5 MHz Channel Bandwidth

Number of TX antennas	Number of RX antennas	Cyclic prefix	Propagation conditions and correlation matrix (Annex B)	FRC (Annex A)	Fraction of maximum throughput	SNR [dB]
1	1 2	Normal	EPA 5Hz Low	A3-4	30%	-4.1
					70%	-0.1
				A4-5	70%	11.0
				A5-4	70%	18.6
			EVA 5Hz Low	A3-1	30%	-2.1
					70%	2.4
				A4-1	30%	4.9
					70%	12.1
				A5-1	70%	19.2

			EVA 70Hz	A3-4	30%	-3.9
			Low	7.5-4	70%	0.5
			2011	A4-5	30%	4.9
				74-5	70%	12.9
			ETU 70Hz*	A3-1	30%	-1.9
			Low	A3-1	70%	3.0
			ETU 300Hz*	A3-1	30%	-1.6
			Low	7.5-1	70%	3.5
		Extended	ETU 70Hz*	A4-2	30%	5.4
		LAtended	Low	74-2	70%	14.1
	4	Normal	EPA 5Hz Low	A3-4	30%	-6.5
	4	Normai		A3-4	70%	-3.2
			-	A4-5	70%	8.2
			-	A5-4	70%	15.0
			EVA 5Hz Low	A3-4 A3-1	30%	-4.5
				A3-1	70%	-0.8
			-	A4-1	30%	1.8
				74-1	70%	8.5
			-	A5-1	70%	16.1
			EVA 70Hz	A3-4	30%	-6.3
			Low	A3-4	70%	-0.3
			2000	A4-5	30%	1.8
				A4-5	70%	8.9
			ETU 70Hz*	A3-1	30%	-4.2
			Low	A3-1	70%	-4.2
			ETU 300Hz*	A3-1	30%	-4.0
			Low	A3-1	70%	0.0
		Extended	ETU 70Hz*	A4-2	30%	2.2
		Exterided	Low	A4-2	<u> </u>	10.5
Note*: Not applicable	for Loool Area	PS and Home D			10%	10.5
note . Not applicable	FIUL LUCALATE		۵.			

Number of TX antennas	Number of RX antennas	Cyclic prefix	Propagation conditions and correlation matrix (Annex B)	FRC (Annex A)	Fraction of maximum throughput	SNR [dB]
1	2	Normal	EPA 5Hz Low	A3-5	30%	-3.6
					70%	0.2
				A4-6	70%	11.4
				A5-5	70%	18.9
			EVA 5Hz Low	A3-1	30%	-2.1
					70%	2.5
				A4-1	30%	4.9
					70%	12.0
				A5-1	70%	19.4
			EVA 70Hz	A3-5	30%	-3.5
			Low		70%	0.7
				A4-6	30%	5.1
					70%	13.2
			ETU 70Hz*	A3-1	30%	-1.9
			Low		70%	3.0
			ETU 300Hz* Low	A3-1	30%	-1.6
					70%	3.5
		Extended	ded ETU 70Hz* A	A4-2	30%	5.4
			Low		70%	14.2
	4	Normal	EPA 5Hz Low	A3-5	30%	-6.2
					70%	-2.9
				A4-6	70%	8.1
				A5-5	70%	15.3
			EVA 5Hz Low	A3-1	30%	-4.4
					70%	-0.6
				A4-1	30%	1.8
					70%	8.5
				A5-1	70%	16.1
			EVA 70Hz	A3-5	30%	-6.1
			Low		70%	-2.3
				A4-6	30%	1.3
					70%	8.6
			ETU 70Hz*	A3-1	30%	-4.2
			Low	F F	70%	-0.3
			ETU 300Hz*	A3-1	30%	-4.0
			Low	F	70%	0.0
		Extended	ETU 70Hz*	A4-2	30%	2.3
			Low		70%	10.9

Table 8.2.1.5-4 Test requirements for PUSCH, 10 MHz Channel Bandwidth

Number of TX antennas	Number of RX antennas	Cyclic prefix	Propagation conditions and correlation matrix (Annex B)	FRC (Annex A)	Fraction of maximum throughput	SNR [dB]
1	2	Normal	EPA 5Hz Low	A3-6	30%	-3.9
					70%	-0.2
				A4-7	70%	11.9
				A5-6	70%	19.4
			EVA 5Hz Low	A3-1	30%	-2.2
					70%	2.4
				A4-1	30%	4.8
					70%	12.0
				A5-1	70%	19.3
			EVA 70Hz	A3-6	30%	-3.9
			Low		70%	0.3
				A4-7	30%	4.8
					70%	13.5
			ETU 70Hz*	A3-1	30%	-1.9
			Low		70%	3.0
			ETU 300Hz*	A3-1	30%	-1.6
			Low		70%	3.5
		Extended ETU 70Hz*	A4-2	30%	5.5	
			Low		70%	14.2
	4	Normal	EPA 5Hz Low	A3-6	30%	-6.6
					70%	-3.2
				A4-7	70%	8.2
				A5-6	70%	15.6
			EVA 5Hz Low	A3-1	30%	-4.4
					70%	-0.6
				A4-1	30%	1.8
					70%	8.5
				A5-1	70%	16.3
			EVA 70Hz	A3-6	30%	-6.4
			Low		70%	-2.7
				A4-7	30%	1.3
					70%	9.1
			ETU 70Hz*	A3-1	30%	-4.2
			Low		70%	-0.4
			ETU 300Hz*	A3-1	30%	-4.0
			Low		70%	0.0
		Extended	ETU 70Hz*	A4-2	30%	2.2
	cable for Local Are			<u> </u>	70%	10.7

Table 8.2.1.5-5 Test requirements for PUSCH, 15 MHz Channel Bandwidth

Number of TX antennas	Number of RX antennas	Cyclic prefix	Propagation conditions and correlation matrix (Annex B)	FRC (Annex A)	Fraction of maximum throughput	SNR [dB]
1 2	2	Normal	EPA 5Hz Low	A3-7	30%	-3.6
					70%	0.2
				A4-8	70%	12.1
				A5-7	70%	20.3
			EVA 5Hz Low	A3-1	30%	-2.1
					70%	2.4
				A4-1	30%	4.9
					70%	12.1
				A5-1	70%	19.3
			EVA 70Hz	A3-7	30%	-3.5
			Low		70%	0.8
				A4-8	30%	4.8
					70%	13.6
			ETU 70Hz* Low	A3-1	30%	-1.8
					70%	3.0
			ETU 300Hz* Low	A3-1	30%	-1.5
					70%	3.5
		Extended ETU 70Hz*	A4-2	30%	5.3	
			Low		70%	14.2
	4	Normal	EPA 5Hz Low	A3-7	30%	-6.2
					70%	-2.9
				A4-8	70%	8.1
				A5-7	70%	16.5
			EVA 5Hz Low	A3-1	30%	-4.5
					70%	-0.7
				A4-1	30%	1.8
					70%	8.5
				A5-1	70%	16.2
			EVA 70Hz	A3-7	30%	-6.1
			Low		70%	-2.3
				A4-8	30%	1.3
					70%	9.2
			ETU 70Hz*	A3-1	30%	-3.8
			Low		70%	-0.3
			ETU 300Hz*	A3-1	30%	-4.0
			Low		70%	-0.1
		Extended	ETU 70Hz*	A4-2	30%	2.2
			Low		70%	10.6

Table 8.2.1.5-6 Test requirements for PUSCH, 20 MHz Channel Bandwidth

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

# 8.2.1A Performance requirements of PUSCH in multipath fading propagation conditions transmission on two antenna ports

#### 8.2.1A.1 Definition and applicability

The performance requirement of PUSCH is determined by a minimum required throughput for a given SNR. The required throughput is expressed as a fraction of maximum throughput for the FRCs listed in Annex A. The performance requirements assume HARQ re-transmissions.

A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidths supported by the BS are applicable.

For the tests on two antenna ports the HARQ retransmissions for multiple codewords are independent.

#### 8.2.1A.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.2.1.1.

#### 8.2.1A.3 Test Purpose

The test shall verify the receiver's ability to achieve throughput of two layer spatial multiplexing transmission under multipath fading propagation conditions for a given SNR.

#### 8.2.1A.4 Method of test

#### 8.2.1A.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7.

1) Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.6.

#### 8.2.1A.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth, defined in Table 8.2.1A.4.2-1.

Channel bandwidth [MHz]	AWGN power level
1.4	-92.7dBm / 1.08MHz
3	-88.7dBm / 2.7MHz
5	-86.5dBm / 4.5MHz
10	-83.5dBm / 9MHz
15	-81.7dBm / 13.5MHz
20	-80.4dBm / 18MHz

#### Table 8.2.1A.4.2-1: AWGN power level at the BS input

2) The characteristics of the wanted signal shall be configured according to the corresponding UL reference measurement channel defined in annex A and the test parameters in Table 8.2.1A.4.2-2. For reference channels using 1 resource block the resource block in the middle of the channel bandwidth shall be used. In case the number of resource blocks in the channel bandwidth are even the one in the middle with lower number is to be used for testing.

Table 8.2.1A.4.2-2	Test parameters	for testing PUSCH
--------------------	-----------------	-------------------

Parameter	Value
Maximum number of HARQ transmissions	4
RV sequence	0, 2, 3, 1, 0, 2, 3, 1
Uplink-downlink allocation for TDD	Configuration 1 (2:2)

- 3) The multipath fading emulators shall be configured according to the corresponding channel model defined in annex B.
- 4) Adjust the equipment so that required SNR specified in Table 8.2.1A.5-1 to 8.2.1A.5-6 is achieved at the BS input.

5) For each of the reference channels in Table 8.2.1A.5-1 to 8.2.1A.5-6 applicable for the base station, measure the throughput, according to annex E.

#### 8.2.1A.5 Test Requirement

The throughput measured according to subclause 8.2.1A.4.2 shall not be below the limits for the SNR levels specified in Table 8.2.1A.5-1 to 8.2.1A.5-6.

Table 8.2.1A.5-1 Test requirements for PUSCH, 1.4 MHz Channel Bandwidth

Number of TX antennas	Number of RX antennas	Cyclic prefix	Propagation conditions and correlation matrix (Annex B)	FRC (Annex A)	Fraction of maximum throughput	SNR [dB]
2	2	Normal	EPA 5Hz Low	A3-2	70%	[5.4]
				A4-3	70%	18.5
	4	Normal	EPA 5Hz Low	A3-2	70%	0.7
				A4-3	70%	12.7

Table 8.2.1A.5-2 Test requirements for PUSCH, 3 MHz Channel Bandwidth

Number of TX antennas	Number of RX antennas	Cyclic prefix	Propagation conditions and correlation matrix (Annex B)	FRC (Annex A)	Fraction of maximum throughput	SNR [dB]
2	2	Normal	EPA 5Hz Low	A3-3	70%	5.2
				A4-4	70%	18.4
	4	Normal	EPA 5Hz Low	A3-3	70%	1.1
				A4-4	70%	12.6

Table 8.2.1A.5-3 Test requirements for PUSCH, 5 MHz Channel Bandwidth

Number of TX antennas	Number of RX antennas	Cyclic prefix	Propagation conditions and correlation matrix (Annex B)	FRC (Annex A)	Fraction of maximum throughput	SNR [dB]
2	2	Normal	EPA 5Hz Low	A3-4	70%	4.5
				A4-5	70%	19.0
	4	Normal	EPA 5Hz Low	A3-4	70%	0.3
				A4-5	70%	12.7

Table 8.2.1A.5-4 Test requirements for PUSCH, 10 MHz Channel Bandwidth

Number of TX antennas	Number of RX antennas	Cyclic prefix	Propagation conditions and correlation matrix (Annex B)	FRC (Annex A)	Fraction of maximum throughput	SNR [dB]
2	2	Normal	EPA 5Hz Low	A3-5	70%	5.0
				A4-6	70%	19.4
	4	Normal	EPA 5Hz Low	A3-5	70%	1.0
				A4-6	70%	12.8

Number of TX antennas	Number of RX antennas	Cyclic prefix	Propagation conditions and correlation matrix (Annex B)	FRC (Annex A)	Fraction of maximum throughput	SNR [dB]
2	2	Normal	EPA 5Hz Low	A3-6	70%	4.5
				A4-7	70%	20.2
	4	Normal	EPA 5Hz Low	A3-6	70%	0.6
				A4-7	70%	13.5

Table 8.2.1A.5-5 Test requirements for PUSCH, 15 MHz Channel Bandwidth

#### Table 8.2.1A.5-6 Test requirements for PUSCH, 20 MHz Channel Bandwidth

Number of TX antennas	Number of RX antennas	Cyclic prefix	Propagation conditions and correlation matrix (Annex B)	FRC (Annex A)	Fraction of maximum throughput	SNR [dB]
2	2	Normal	EPA 5Hz Low	A3-7	70%	5.2
				A4-8	70%	20.5
	4	Normal	EPA 5Hz Low	A3-7	70%	1.3
				A4-8	70%	13.5

# 8.2.2 Performance requirements for UL timing adjustment

## 8.2.2.1 Definition and applicability

The performance requirement of PUSCH is determined by a minimum required throughput measured for the moving UE at given SNR. The required throughput is expressed as 70% of maximum throughput for the FRCs listed in Annex A. The performance requirements assume HARQ re-transmissions.

In the tests for UL timing adjustment, two signals are configured, one being transmitted by moving UE and the other being transmitted by stationary UE. The transmission of SRS from UE is optional. FRC parameters in Table A.7-1 and Table A.8-1 are applied for both UEs. The received power for both UEs is the same. The resource blocks allocated for both UEs are consecutive. In Scenario 2, Doppler shift is not taken into account.

A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidths supported by the BS are applicable.

This requirement shall not be applied to Local Area BS and Home BS.

#### 8.2.2.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.2.2.1.

## 8.2.2.3 Test Purpose

The test shall verify the receiver's ability to achieve throughput measured for the moving UE at given SNR under moving propagation conditions.

#### 8.2.2.4 Method of test

#### 8.2.2.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7.

1) Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.4.

## 8.2.2.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth, defined in Table 8.2.2.4.2-1.

Channel bandwidth [MHz]	AWGN power level
1.4	-92.7 dBm / 1.08MHz
3	-88.7 dBm / 2.7MHz
5	-86.5 dBm / 4.5MHz
10	-83.5 dBm / 9MHz
15	-81.7 dBm / 13.5MHz
20	-80.4 dBm / 18MHz

Table 8.2.2.4.2-1: AWGN power level at the BS input

2) The characteristics of the wanted signals (transmitted by moving UE) shall be configured according to the corresponding UL reference measurement channel defined in Annex A and the test parameters in Table 8.2.2.4.2-2.

Table 8.2.2.4.2-2 Test	parameters for testing	UL timing adjustment
------------------------	------------------------	----------------------

Parameter	Value
Maximum number of HARQ transmissions	4
RV sequence	0, 2, 3, 1, 0, 2, 3, 1
Uplink-downlink allocation for TDD	Configuration 1 (2:2)
Subframes in which PUSCH is transmitted	For FDD: subframe #0, #2, #4, #6, and #8 in radio frames For TDD: Subframe #2, #3, #7, #8 in each radio frame
Subframes in which sounding RS is transmitted (Note 1)	For FDD: subframe #1 in radio frames For TDD: UpPTS in each radio frame
Note 1. The transmission of SRS is optional.	

- 3) The multipath fading emulators shall be configured according to the corresponding channel model defined in Annex B.
- 4) Adjust the equipment so that required SNR specified in Table 8.2.2.5-1 is achieved at the BS input.
- 5) For each of the reference channels in Table 8.2.2.5-1 applicable for the base station, measure the throughput, according to Annex E.

#### 8.2.2.5 Test Requirement

The throughput measured for the moving UE according to subclause 8.2.2.4.2 shall not be below the limits for the SNR levels specified in Table 8.2.2.5-1.

Number of TX antennas	Number of RX antennas	Cyclic prefix	Channel Bandwidth [MHz]	Moving propagation conditions and correlation matrix (Annex B)	FRC (Annex A)	SNR [dB]						
			1.4	Scenario 1 Low	A7-1	13.7						
			1.4	Scenario 2 Low	A8-1	-1.6						
			3	Scenario 1 Low	A7-2	14.0						
			3	Scenario 2 Low	A8-2	-1.2						
										5	Scenario 1 Low	A7-3
1	2	Normal	5	Scenario 2 Low	A8-3	-1.3						
I	2	Normai	10	Scenario 1 Low	A7-4	14.4						
			10	Scenario 2 Low	A8-4	-1.5						
			15	Scenario 1 Low	A7-5	14.6						
			15	Scenario 2 Low	A8-5	-1.5						
			20	Scenario 1 Low	A7-6	14.5						
			20	Scenario 2 Low	A8-6	-1.5						

Table 8.2.2.5-1 Test requirements for UL timing adjustment

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test is defined in subclause 4.1 and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

# 8.2.3 Performance requirements for HARQ-ACK multiplexed on PUSCH

## 8.2.3.1 Definition and applicability

The performance requirement of HARQ-ACK multiplexed on PUSCH is determined by the two parameters: probability of false detection of the ACK and the probability of detection of ACK. The performance is measured by the required SNR at probability of detection equal to 0.99. The probability of false detection of the ACK shall be 0.01 or less at PUSCH power settings presented in table 8.2.3.5-1.

The probability of detection of ACK on PUSCH is defined as conditional probability of detection of the ACK when the ACK is transmitted on PUSCH allocated RE.

The probability of false detection of the ACK on PUSCH is defined as a conditional probability of erroneous detection of the ACK when data only is sent on PUSCH allocated RE, where HARQ-ACK can be allocated (i.e. by puncturing data). Pseudo-random data shall be used as an input for PUSCH coding and modulation purposes.

These tests shall be performed on one of RE"s, where HARQ-ACK information was multiplexed on PUSCH.

In the test for HARQ-ACK multiplexed on PUSCH data is punctured by HARQ-ACK information in both slots within a subframe on symbols as specified in 36.212 [13] subclause 5.2.2.8. Amount of resources for HARQ-ACK information is calculated according to 36.212 [13] subclause 5.2.2.6. None of CQI, RI nor SRS is to be transmitted in these tests. Tests are performed for one bit HARQ-ACK information (O = 1).

This test is applied for QPSK 1/3 and 16QAM 3/4 modulation and coding schemes, with appropriate fixed reference channels for performance requirement applied as presented in table 8.2.3.5-1. Normal CP, 2 Rx antennas and ETU70 propagation conditions shall be used for this test.

A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidths supported by the BS are applicable.

# 8.2.3.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.2.4.1.

# 8.2.3.3 Test Purpose

The test shall verify the receiver's ability to detect HARQ-ACK information multiplexed on PUSCH under multipath fading propagation conditions for a given SNR.

# 8.2.3.4 Method of test

## 8.2.3.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7.

1) Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.2.

#### 8.2.3.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth, defined in Table 8.2.3.4.2-1.

Channel bandwidth [MHz]	AWGN power level
1.4	-92.7 dBm / 1.08MHz
3	-88.7 dBm / 2.7MHz
5	-86.5 dBm / 4.5MHz
10	-83.5 dBm / 9MHz
15	-81.7 dBm / 13.5MHz
20	-80.4 dBm / 18MHz

#### Table 8.2.3.4.2-1: AWGN power level at the BS input

- 2) The characteristics of the wanted signal shall be configured according to the corresponding UL reference measurement channel defined in Annex A and details presented in chapter 8.2.3.1. For reference channels using 1 resource block the RB in the middle of the channel bandwidth should be used. In case the number of resource blocks in the channel bandwidth are even the one in the middle with lower number is to be used for testing.
- 3) The multipath fading emulators shall be configured according to ETU70 channel model defined in Annex B.2.
- 4) Adjust the equipment so that required SNR specified in Table 8.2.3.5-1 is achieved at the BS input during the ACK transmissions.
- 5) The signal generator sends a test pattern on one of RE"s where HARQ-ACK information can be multiplexed on PUSCH with the pattern outlined in figure 8.2.3.4.2-1. The following statistics are kept: the number of ACKs detected during data only transmissions and the number of missed ACKs during PUSCH with ACK transmission.

PUSCH	PUSCH	PUSCH	PUSCH	PUSCH	•••
(data only)	with ACK	(data only)	with ACK	(data only)	

#### Figure 8.2.3.4.2-1 Test signal pattern for HARQ-ACK multiplexed on PUSCH demodulation tests

#### 8.2.3.5 Test Requirement

The fraction of falsely detected ACKs measured according to subclause 8.2.3.4.2 shall be less than 1% and the fraction of correctly detected ACKs shall be larger than 99% for the SNR listed in table 8.2.3.5-1.

Number of TX antennas	Number of RX antennas	Cyclic Prefix	Propagation conditions and correlation matrix (Annex B)	Channel Bandwidth [MHz]	FRC (Annex A)	$I_{\textit{offset}}^{\textit{HARQ-ACK}}$	SNR [dB]
1	2	Normal	EVA 5* Low	1.4	A.3-1	8	7.4
					A.4-3	5	14.2
				3	A.3-1	8	7.4
					A.4-4	5	13.7
				5	A.3-1	8	7.5
					A.4-5	5	13
				10	A.3-1	8	7.4
					A.4-6	5	13
				15	A.3-1	8	7.4
					A.4-7	5	12.6
				20	A.3-1	8	7.4
					A.4-8	5	12.5
			ETU70** Low	1.4	A.3-1	8	7.2
					A.4-3	5	14.4
				3	A.3-1	8	7.2
					A.4-4	5	13.5
				5	A.3-1	8	7.1
					A.4-5	5	13.1
				10	A.3-1	8	7.2
					A.4-6	5	12.9
				15	A.3-1	8	7.3
					A.4-7	5	12.7
				20	A.3-1	8	7.1
					A.4-8	5	12.6
	applicable for W applicable for L		and Medium Range BS. and Home BS.				

Table 8.2.3.5-1 Test requirements for HARQ-ACK multiplexed on PUSCH

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

# 8.2.4 Performance requirements for High Speed Train conditions

## 8.2.4.1 Definition and applicability

The performance requirement of PUSCH for High Speed Train conditions is determined by a minimum throughput for a given SNR. The required throughput is expressed as 30% and 70% of maximum throughput for the FRCs listed in Annex A. The performance requirements assume HARQ retransmissions and are applied for normal CP.

A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidths supported by the BS are applicable.

The performance requirements for High Speed Train conditions are optional.

This requirement shall not be applied to Local Area BS and Home BS.

#### 8.2.4.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.2.3.1

#### 8.2.4.3 Test Purpose

The test shall verify the receiver"s ability to achieve throughput under High Speed Train conditions for a given SNR.

#### 8.2.4.4 Method of test

#### 8.2.4.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7.

1) Connect the BS tester generating the wanted signal, channel simulators and AWGN generators to all BS antenna connectors (depending on HST scenario) via a combining network as shown in Annex I.3.2.

#### 8.2.4.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth, defined in Table 8.2.4.4.2-1.

Channel bandwidth [MHz]	AWGN power level
1.4	-92.7 dBm / 1.08MHz
3	-88.7 dBm / 2.7MHz
5	-86.5 dBm / 4.5MHz
10	-83.5 dBm / 9MHz
15	-81.7 dBm / 13.5MHz
20	-80.4 dBm / 18MHz

#### Table 8.2.4.4.2-1: AWGN power level at the BS input

2) The characteristics of the wanted signal shall be configured according to the corresponding UL reference measurement channel defined in Annex A and the test parameters in Table 8.2.4.4.2-2.

Parameter	Value
Maximum number of HARQ transmissions	4
RV sequence	0, 2, 3, 1, 0, 2, 3, 1
Uplink-downlink allocation for TDD	Configuration 1 (2:2)
Subframes in which PUSCH is transmitted	For FDD: subframe #0 and #8 in radio frames for which SFN mod 4 = 0 subframe #6 in radio frames for which SFN mod 4 = 1 subframe #4 in radio frames for which SFN mod 4 = 2 subframe #2 in radio frames for which SFN mod 4 = 3 For TDD: Subframe #2 in each radio frames
Subframes in which PUCCH is transmitted (Note1, Note 2)	For FDD: subframe #5 in radio frames For TDD: Subframe #3 in each radio frame
NOTE 1: The configuration of PUCCH (format	t 2) is optional.
NOTE 2: The SNR values per antenna shall b	e set to -4.5 dB and -1.5 dB for Scenario 1 and 3, respectively.

3) The channel simulators shall be configured according to the corresponding channel model defined in Annex B.3.

- 4) Adjust the equipment so that required SNR specified in Table 8.2.4.5-1 is achieved at the BS input.
- 5) For each of the reference channels in Table 8.2.4.5-1 applicable for the base station, measure the throughput, according to Annex E.

#### 3GPP TS 36.141 version 11.9.0 Release 11

188

#### 8.2.4.5 Test Requirement

The throughput measured according to subclause 8.2.4.4.2 shall not be below the limits for the SNR levels specified in Table 8.2.4.5-1.

Channel Bandwidth [MHz]	FRC (Annex A)	Number of TX antennas	Number of RX antennas	Propagation conditions and correlation matrix (Annex B)	Fraction of maximum throughput	SNR [dB]
			1	HST Scenario 3	<u> </u>	-1.2 2.2
1.4	A3-2			HST Scenario 1	30%	-3.6
			2	Low	70%	-0.3
			1	HST Scenario 3	30%	-1.8
3	A3-3				70%	1.9
			2	HST Scenario 1 Low	<u> </u>	-4.2 -0.7
			4		30%	-2.3
5	A3-4		1	HST Scenario 3	70%	1.6
5	A3-4		2	HST Scenario 1	30%	-4.8
		1	2	Low	70%	-1.1
			1	HST Scenario 3	30%	-2.4
10	A3-5				70%	1.5
-			2	HST Scenario 1	30%	-5.1
				Low	70%	-1.2
			1	HST Scenario 3	<u> </u>	-2.4 1.5
15	A3-6			HST Scenario 1	30%	-4.9
			2	Low	70%	-4.9
			4	-	30%	-2.4
20	A3-7		1	HST Scenario 3	70%	1.5
20	A3-7		2	HST Scenario 1	30%	-5.0
			2	Low	70%	-1.1

Table 8.2.4.5-1: Test requirements for High Speed Train conditions

# 8.3 Performance requirements for PUCCH

# 8.3.1 ACK missed detection for single user PUCCH format 1a transmission on single antenna port

#### 8.3.1.1 Definition and applicability

The performance requirement of single user PUCCH for ACK missed detection is determined by the two parameters: probability of false detection of the ACK and the probability of detection of ACK. The performance is measured by the required SNR at probability of detection equal to 0.99. The probability of false detection of the ACK shall be 0.01 or less.

The probability of false detection of the ACK is defined as a conditional probability of erroneous detection of the ACK when input is only noise.

The probability of detection of ACK is defined as conditional probability of detection of the ACK when the signal is present.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

The test is applicable to all BS. A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidth supported by the BS are applicable.

ACK/NACK repetitions are disabled for PUCCH transmission.

#### 8.3.1.2 **Minimum Requirement**

The minimum requirement is in TS 36.104 [2] subclause 8.3.1.1 and 8.3.2.1.

#### 8.3.1.3 Test purpose

The test shall verify the receiver's ability to detect ACK under multipath fading propagation conditions for a given SNR.

#### 8.3.1.4 Method of test

8.3.1.4.1 **Initial Conditions** 

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7

1) Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.2.

#### 8.3.1.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth defined in Table 8.3.1.4.2-1.

Channel bandwidth [MHz]	AWGN power level
1.4	-89.7 dBm / 1.08MHz
3	-85.7 dBm / 2.7MHz
5	-83.5 dBm / 4.5MHz
10	-80.5 dBm / 9MHz
15	-78.7 dBm / 13.5MHz
20	-77.4 dBm / 18MHz

Table 8.3.1.4.2-1: AWGN power level at the BS input

- 2) The characteristics of the wanted signal shall be configured according to TS 36.211 [12].
- 3) The multipath fading emulators shall be configured according to the corresponding channel model defined in Annex B.
- 4) Adjust the equipment so that the SNR specified in Table 8.3.1.5-1 is achieved at the BS input during the ACK transmissions.
- 5) The signal generator sends a test pattern with the pattern outlined in figure 8.3.1.4.2-1. The following statistics are kept: the number of ACKs detected in the idle periods and the number of missed ACKs.

ACK		ACK		ACK	***
-----	--	-----	--	-----	-----

Figure 8.3.1.4.2-1 Test signal pattern for single user PUCCH format 1a demodulation tests

## 8.3.1.5 Test Requirement

The fraction of falsely detected ACKs shall be less than 1% and the fraction of correctly detected ACKs shall be larger than 99% for the SNR listed in Table 8.3.1.5-1.

Number	Number	Cyclic	Propagation		Chann	el Band	width / SN	NR [dB]	
of TX antennas	of RX antennas	Prefix	conditions and correlation matrix (Annex B)	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
1	2	Normal	EPA 5 Low	-1.9	-3.3	-4.2	-4.8	-4.7	-4.5
		[	EVA 5 Low	-3.9	-4.5	-4.5	-4.4	-4.5	-4.5
		[	EVA 70 Low	-4.3	-4.6	-4.6	-4.5	-4.6	-4.5
			ETU 300* Low	-4.4	-4.5	-4.3	-4.4	-4.6	-4.6
		Extended	ETU 70* Low	-3.6	-3.7	-3.5	-3.7	-3.6	-3.7
	4	Normal	EPA 5 Low	-7.3	-7.8	-8.1	-8.3	-8.3	-8.4
			EVA 5 Low	-8.2	-8.5	-8.5	-8.2	-8.3	-8.3
		[	EVA 70 Low	-8.3	-8.4	-8.4	-8.2	-8.4	-8.2
		[ [	ETU 300* Low	-8.1	-8.3	-8.1	-8.1	-8.3	-8.2
		Extended	ETU 70* Low	-7.3	-7.5	-7.3	-7.5	-7.4	-7.4
Note*: Not	applicable fo	r Local Area	BS and Home BS.						

#### Table 8.3.1.5-1 Required SNR for single user PUCCH format 1a demodulation tests

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

# 8.3.2 CQI performance requirements for PUCCH format 2 transmission on single antenna port

## 8.3.2.1 Definition and applicability

The performance requirement of PUCCH format 2 for CQI is determined by the block error probability (BLER) of CQI. The performance is measured by the required SNR at BLER of 1%.

The CQI block error probability is defined as the conditional probability of incorrectly decoding the CQI information when the CQI information is sent. All CQI information shall be decoded (no exclusion due to DTX).

The test is applicable to all BS. A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidths supported by the BS are applicable.

#### 8.3.2.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.3.3.1.

## 8.3.2.3 Test purpose

The test shall verify the receiver"s ability to detect CQI under multipath fading propagation conditions for a given SNR.

## 8.3.2.4 Method of test

#### 8.3.2.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7

#### 3GPP TS 36.141 version 11.9.0 Release 11

191

1) Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.2.

#### 8.3.2.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth defined in Table 8.3.2.4.2-1.

Channel bandwidth [MHz]	AWGN power level
1.4	-89.7 dBm / 1.08MHz
3	-85.7 dBm / 2.7MHz
5	-83.5 dBm / 4.5MHz
10	-80.5 dBm / 9MHz
15	-78.7 dBm / 13.5MHz
20	-77.4 dBm / 18MHz

Table 8.3.2.4.2-1: AWGN power level at the BS input

- 2) The characteristics of the wanted signal shall be configured according to TS 36.211. The CQI information bit payload per sub-frame is equal to 4 bits.
- 3) The multipath fading emulators shall be configured according to the corresponding channel model defined in Annex B.
- 4) Adjust the equipment so that the SNR specified in Table 8.3.2.5-1 is achieved at the BS input during the CQI transmissions.
- 5) The signal generator sends a test pattern with the pattern outlined in figure 8.3.2.4.2-1. The following statistics are kept: the number of incorrectly decoded CQI.

CQI CQI ••
------------

#### Figure 8.3.2.4.2-1 Test signal pattern for PUCCH format 2 demodulation tests

#### 8.3.2.5 Test Requirement

The fraction of incorrectly decoded CQIs shall be less than 1% for the SNR listed in Table 8.3.2.5-1.

Number	Number	Cyclic	Propagation		Char	nel Bandw	/idth / SNR	[dB]			
of TX antennas	of RX antennas	Prefix	conditions and correlation matrix (Annex B)	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz		
1	2	Normal	EVA 5* Low	-3.1	-3.5	-3.8	-3.4	-3.6	-3.6		
			ETU 70** Low	-3.3	-3.8	-3.6	-3.8	-3.8	-3.8		
Note*: Not applicable for Wide Area BS and Medium Range BS.											
Note**:											

Table 8.3.2.5-1 Required SNR for PUCCH format 2 demodulation tests

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

# 8.3.3 ACK missed detection for multi user PUCCH format 1a

# 8.3.3.1 Definition and applicability

The performance requirement of multi user PUCCH for ACK missed detection is determined by the two parameters: probability of false detection of the ACK and the probability of detection of ACK on the wanted signal. The performance is measured by the required SNR at probability of detection equal to 0.99. The probability of false detection of the ACK shall be 0.01 or less. These probabilities are measured on the wanted signal at presence of three interfering signals as specified in section 8.3.3.4.2.

The probability of false detection of the ACK is defined as a conditional probability of erroneous detection of the ACK when input is only noise and the interfering signals are present.

The probability of detection of ACK is defined as conditional probability of detection of the ACK when the signal is present.

The test is applicable to all BS. A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidths supported by the BS are applicable.

Multi user PUCCH test is performed only for 2 Rx antennas, Normal CP and for ETU70 propagation conditions.

ACK/NACK repetitions are disabled for PUCCH transmission.

#### 8.3.3.2 Minimum Requirement

The minimum requirements are in TS 36.104 [2] subclause 8.3.1.1 and 8.3.4.1.

#### 8.3.3.3 Test purpose

The test shall verify the receiver's ability to detect ACK on the wanted signal at presence of three interfering signals as specified in section 8.3.3.4.2, under multipath fading propagation conditions for a given SNR.

#### 8.3.3.4 Method of test

#### 8.3.3.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7.

- Connect the BS tester generating the wanted and all interfering signals, multipath fading simulators and AWGN generators to both BS antenna connectors for 2Rx diversity reception via a combining network as shown in Annex I.3.3.
- 2) Interconnect attenuators for relative power setting purposes for all transmitting branches (wanted signal and all interferers, separately).

#### 8.3.3.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth defined in Table 8.3.3.4.2-1.

Channel bandwidth [MHz]	AWGN power level
1.4	-89.7 dBm / 1.08MHz
3	-85.7 dBm / 2.7MHz
5	-83.5 dBm / 4.5MHz
10	-80.5 dBm / 9MHz
15	-78.7 dBm / 13.5MHz
20	-77.4 dBm / 18MHz

 Table 8.3.3.4.2-1: AWGN power level at the BS input

2) In multi user PUCCH test, four signals are configured: one wanted signal and three interferers, which are transmitted via separate fading paths using relative power settings presented in Annex A.9.

All signals are transmitted on the same PUCCH resources, with different PUCCH channel indices, as presented in Annex A.9.

The characteristics of the all signals (i.e. wanted and all interferers) shall be configured according to 36.211 [12].

- 3) The multipath fading emulators shall be configured according to ETU70 propagation conditions defined in Annex B.
- 4) Adjust the equipment so that the SNR specified in Table 8.3.3.5-1 is achieved at the BS input during the ACK transmissions on the wanted signal.
- 5) The signal generator sends a test pattern with the pattern outlined in figure 8.3.3.4.2-1. This statement is valid for the wanted PUCCH signal. All interferers are present for all subframes. The following statistics are kept: the number of ACKs detected in the idle periods and the number of missed ACKs on the wanted PUCCH signal.

ACK ACK ACK	•••
-------------	-----

#### Figure 8.3.3.4.2-1 Test signal pattern for multi user PUCCH demodulation tests

#### 8.3.3.5 Test Requirement

The fraction of falsely detected ACKs on the wanted signal shall be less than 1% and the fraction of correctly detected ACKs shall be larger than 99% for the SNR listed in Table 8.3.3.5-1.

Number	Number	Cyclic	Propagation		Channe	el Bandv	vidth / S	NR [dB]		
of TX antennas	of RX antennas	Prefix	conditions and correlation matrix (Annex B)	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
1	2	Normal	ETU 70* Low	-3.5	-3.8	-3.8	-4.0	-4.0	-3.8	
Note*: Not a	Note*: Not applicable for Local Area BS and Home BS.									

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

# 8.3.4 ACK missed detection for PUCCH format 1b with Channel Selection

#### 8.3.4.1 Definition and applicability

The performance requirement of PUCCH format 1b with Channel Selection for ACK missed detection is determined by the two parameters: probability of false detection of the ACK and the probability of detection of ACK. The performance is measured by the required SNR at probability of detection equal to 0.99. The probability of false detection of the ACK shall be 0.01 or less.

The probability of false detection of the ACK is defined as a conditional probability of erroneous detection of the ACK at particular channel when input is only noise.

The probability of detection of ACK is defined as conditional probability of detection of the ACK when the ACK was sent at particular channel.

The test is applicable to all BS. A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidth supported by the BS are applicable.

The number of encoded ACK/NACK bits per sub-frame is equal to 4 bits (AAAA),

ACK/NACK repetitions are disabled for PUCCH transmission.

#### 8.3.4.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.3.1.1 and 8.3.5.1.

#### 8.3.4.3 Test purpose

The test shall verify the receiver's ability to detect ACK bits under multipath fading propagation conditions for a given SNR.

#### 8.3.4.4 Method of test

8.3.4.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7

1) Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.2.

#### 8.3.4.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth defined in Table 8.3.4.4.2-1.

Tal	ble 8.3.4.4.2-1: AWGN pow	ver level at the BS inp	out
	Channel bandwidth [MHz]	AWGN power level	

Channel bandwidth [MHz]	AWGN power level
10	-80.5 dBm / 9MHz
15	-78.7 dBm / 13.5MHz
20	-77.4 dBm / 18MHz

- 2) The characteristics of the wanted signal shall be configured according to TS 36.211 [12].
- 3) The multipath fading emulators shall be configured according to the corresponding channel model defined in Annex B.
- 4) Adjust the equipment so that the SNR specified in Table 8.3.4.5-1 is achieved at the BS input during the AAAA codeword transmissions.
- 5) The signal generator sends AAAA codeword in regular time periods. The following statistics are kept: the number of ACK bits falsely detected in the idle periods and the number of missed ACK bits. Each falsely detected ACK bit in the idle periods is accounted as one error for the statistics of false ACK detection, and each missed ACK bit is accounted as one error for the statistics of missed ACK detection.

# 8.3.4.5 Test Requirement

The fraction of falsely detected ACK bits shall be less than 1% and the fraction of correctly detected ACK bits shall be larger than 99% for the SNR listed in Table 8.3.4.5-1.

Number of TX	Number of RX	Cyclic Prefix	Propagation conditions and	nnel Ban	dwidth / SNR [dB]				
antennas	antennas	FIGUX	correlation matrix (Annex B)	1.4MHz	3MHz	5MHz	10 MHz	15MHz	20MHz
1	2	Normal	EPA 5 Low	-	-	-	-3,9	-4,0	-4,0
			EVA70 Low	-	-	-	-3,7	-3,9	-3,9
	4	Normal	EPA 5 Low	-	-	-	-7,8	-7,9	-8,0
			EVA70 Low	-	-	-	-7,7	-7,9	-7.9

Table 8.3.4.5-1 Required SNR for PUCCH format 1b with Channel Selection demodulation tests

# 8.3.5 ACK missed detection for PUCCH format 3

# 8.3.5.1 Definition and applicability

The performance requirement of PUCCH format 3 for ACK missed detection is determined by the two parameters: probability of false detection of the ACK and the probability of detection of ACK. The performance is measured by the required SNR at probability of detection equal to 0.99. The probability of false detection of the ACK shall be 0.01 or less.

The probability of false detection of the ACK is defined as a conditional probability of erroneous detection of the ACK at particular bit position when input is only noise.

The probability of detection of ACK is defined as conditional probability of detection of the ACK when the ACK was sent at particular bit position. Each missed ACK bit is counted as one error.

The test is applicable to all BS. A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidth supported by the BS are applicable.

The number of encoded ACK/NACK bits per sub-frame is defined for two cases as presented below:

- 4AN bits: applicable for FDD and TDD
- 16AN bits : applicable for TDD

ACK/NACK repetitions are disabled for PUCCH transmission. Random codeword selection is assumed.

# 8.3.5.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.3.1.1 and 8.3.6.1.

# 8.3.5.3 Test purpose

The test shall verify the receiver's ability to detect ACK bits in codeword's from applicable codebook being randomly selected, under multipath fading propagation conditions for a given SNR.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

#### 8.3.5.4 Method of test

8.3.5.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7

1) Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.2.

#### 8.3.5.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth defined in Table 8.3.5.4.2-1.

Table 8.3.5.4.2-1: AWGN power level at the BS input

Channel bandwidth [MHz]	AWGN power level
10	-80.5 dBm / 9MHz
15	-78.7 dBm / 13.5MHz
20	-77.4 dBm / 18MHz

- 2) The characteristics of the wanted signal shall be configured according to TS 36.211 [12].
- 3) The multipath fading emulators shall be configured according to the corresponding channel model defined in Annex B.
- 4) Adjust the equipment so that the SNR specified in Table 8.3.5.5-1 or 8.3.5.5-2 is achieved at the BS input during the codeword"s transmissions.
- 5) The signal generator sends random codewords from applicable codebook, in regular time periods. The following statistics are kept: the number of ACK bits falsely detected in the idle periods and the number of missed ACK bits. Each falsely detected ACK bit in the idle periods is accounted as one error for the statistics of false ACK detection, and each missed ACK bit is accounted as one error for the statistics of missed ACK detection.

## 8.3.5.5 Test Requirement

The fraction of falsely detected ACK bits shall be less than 1% and the fraction of correctly detected ACK bits shall be larger than 99% for the SNR listed in Tables 8.3.5.5-1 and 8.3.5.5-2.

Number of TX	Number of RX	Cyclic Prefix	Propagation conditions and	Channel Bandwidth / SNR [dB]						
antennas	antennas	FIGIA	correlation matrix (Annex	1.4MHz	3MHz	5MHz	10 MHz	15MHz	20MHz	
			В)							
1	2	Normal	EPA 5 Low	-	-	-	-3,1	-3,2	-3,2	
				EVA70 Low	-	-	-	-2,9	-3,0	-3,1
	4	Normal	EPA 5 Low	-	-	-	-6,7	-6,8	-6,9	
			EVA70 Low	-	-	-	-6,6	-6,7	-6,7	

Number	Number Number of Cyclic Propagation of TX RX Prefix conditions and		Channel Bandwidth / SNR [dB]						
antenna s	antennas	Flelix	correlation matrix (Annex B)	1.4MHz	3MHz	5MHz	10 MHz	15MHz	20MHz
1	2	Normal	EPA 5 Low	-	-	-	-0,7	-0,6	-0,6
			EVA70 Low	-	-	-	-0,2	-0,3	-0,3
	4	Normal	EPA 5 Low	-	-	-	-4,7	-4,7	-4,8
			EVA70 Low	-	-	-	-4,4	-4,5	-4,5

 Table 8.3.5.5-2 Required SNR for PUCCH format 3 demodulation tests, 16AN bits

# 8.3.6 NACK to ACK detection for PUCCH format 3

#### 8.3.6.1 Definition and applicability

The performance requirement of PUCCH format 3 for NACK to ACK detection is determined by the two parameters: probability of false detection of the ACK and the NACK to ACK detection probability. The performance is measured by the required SNR at probability of the NACK to ACK detection equal to 0.001 or less. The probability of false detection of the ACK shall be 0.01 or less.

The probability of false detection of the ACK is defined as a conditional probability of erroneous detection of the ACK at particular bit position when input is only noise. Each false bit detection is counted as one error.

The NACK to ACK detection probability is the probability of detecting an ACK bit when an NACK bit was sent on particular bit position. Each NACK bit erroneously detected as ACK bit is counted as one error. Erroneously detected NACK bits in the definition do not contain the NACK bits which are mapped from DTX, i.e. NACK bits received when DTX is sent should not be considered.

The test is applicable to all BS. A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidth supported by the BS are applicable.

The number of encoded ACK/NACK bits per sub-frame is defined as presented below, with random codeword selection assumed:

• 16AN bits: applicable for TDD

ACK/NACK repetitions are disabled for PUCCH transmission. Random codeword selection is assumed.

#### 8.3.6.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.3.1.1 and 8.3.6.1.

#### 8.3.6.3 Test purpose

The test shall verify the receiver"s ability not to falsely detect NACK bits, transmitted in codeword randomly selected from applicable codebook, as ACK bits under multipath fading propagation conditions for a given SNR.

#### 8.3.6.4 Method of test

8.3.6.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

1) Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.2.

#### 8.3.6.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth defined in Table 8.3.6.4.2-1.

#### Table 8.3.6.4.2-1: AWGN power level at the BS input

Channel bandwidth [MHz]	AWGN power level			
10	-80.5 dBm / 9MHz			
15	-78.7 dBm / 13.5MHz			
20	-77.4 dBm / 18MHz			

- 2) The characteristics of the wanted signal shall be configured according to TS 36.211 [12].
- 3) The multipath fading emulators shall be configured according to the corresponding channel model defined in Annex B.
- 4) Adjust the equipment so that the SNR specified in Table 8.3.6.5-1 is achieved at the BS input during the codeword"s transmissions.
- 5) The signal generator sends random codeword from applicable codebook, in regular time periods. The following statistics are kept: the number of ACK bits detected in the idle periods and the number of NACK bits detected as ACK.

## 8.3.6.5 Test Requirement

The fraction of falsely detected ACK bits shall be less than 1% and the fraction of NACK bits falsely detected as ACK shall be less than 0,1% for the SNR listed in Tables 8.3.6.5-1.

Number of TX	Number	Number         Cyclic         Propagation           of RX         Prefix         conditions and			Channel Bandwidth / SNR [dB]						
antennas	antennas	FIEIX	correlation matrix (Annex B)	1.4MHz	3MHz	5MHz	10 MHz	15MHz	20MHz		
1	2	Normal	EPA 5 Low	-	-	-	2,0	2,2	2,1		
			EVA70 Low	-	-	-	2,7	2,5	2,5		
	4	Normal	EPA 5 Low	-	-	-	-2,5	-2,7	-2,9		
			EVA70 Low	-	-	-	-2,3	-2,5	-2,6		

 Table 8.3.6.5-1 Required SNR for PUCCH format 3 demodulation tests, 16AN bits

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

# 8.3.7 ACK missed detection for PUCCH format 1a transmission on two antenna ports

## 8.3.7.1 Definition and applicability

The performance requirement of PUCCH for ACK missed detection is determined by the two parameters: probability of false detection of the ACK and the probability of detection of ACK. The performance is measured by the required SNR at probability of detection equal to 0.99. The probability of false detection of the ACK shall be 0.01 or less.

The probability of false detection of the ACK is defined as a conditional probability of erroneous detection of the ACK when input is only noise.

The probability of detection of ACK is defined as conditional probability of detection of the ACK when the signal is present.

The test is applicable to all BS. A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidth supported by the BS are applicable.

ACK/NACK repetitions are disabled for PUCCH transmission.

#### 8.3.7.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.3.1.1 and 8.3.2.1.

#### 8.3.7.3 Test purpose

The test shall verify the receiver's ability to detect ACK under multipath fading propagation conditions for a given SNR.

#### 8.3.7.4 Method of test

#### 8.3.7.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7

1) Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.5.

#### 8.3.7.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth defined in Table 8.3.7.4.2-1.

Channel bandwidth [MHz]	AWGN power level
1.4	-89.7 dBm / 1.08MHz
3	-85.7 dBm / 2.7MHz
5	-83.5 dBm / 4.5MHz
10	-80.5 dBm / 9MHz
15	-78.7 dBm / 13.5MHz
20	-77.4 dBm / 18MHz

Table 8.3.7.4.2-1: AWGN power level at the BS input

- Signals transmitted on two antenna ports are on the same PUCCH resource block with different channel indices as presented in Annex A.10. The characteristics of the wanted signal shall be configured according to TS 36.211 [12].
- 3) The multipath fading emulators shall be configured according to the corresponding channel model defined in Annex B.
- 4) Adjust the equipment so that the SNR specified in Table 8.3.7.5-1 is achieved at the BS input during the ACK transmissions.
- 5) The signal generator sends a test pattern with the pattern outlined in figure 8.3.7.4.2-1. The following statistics are kept: the number of ACKs detected in the idle periods and the number of missed ACKs.

ACK		ACK		ACK	•••
-----	--	-----	--	-----	-----

Figure 8.3.7.4.2-1: Test signal pattern for PUCCH format 1a demodulation tests

## 8.3.7.5 Test Requirement

The fraction of falsely detected ACKs shall be less than 1% and the fraction of correctly detected ACKs shall be larger than 99% for the SNR listed in Table 8.3.7.5-1.

Number	Number	Cyclic	Propagation	Channel Bandwidth / SNR [dB]						
of TX antennas	of RX antennas	Prefix	conditions and correlation matrix (Annex B)	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
2	2	Normal	EPA 5 Low	-3.8	-4.1	-5.6	-5.7	-5.7	-5.9	
			EVA 70 Low	-5.0	-5.1	-5.6	-5.1	-5.6	-5.6	
	4	Normal	EPA 5 Low	-7.7	-7.7	-8.5	-8.7	-8.7	-8.7	
			EVA 70 Low	-8.2	-8.4	-8.5	-8.5	-8.6	-8.7	

Table 8.3.7.5-1: Required SNR for single user PUCCH fo	ormat 1a demodulation tests
--	-----------------------------

# 8.3.8 CQI performance requirements for PUCCH format 2 transmission on two antenna ports

## 8.3.8.1 Definition and applicability

The performance requirement of PUCCH format 2 for CQI is determined by the block error probability (BLER) of CQI. The performance is measured by the required SNR at BLER of 1%.

The CQI block error probability is defined as the conditional probability of incorrectly decoding the CQI information when the CQI information is sent. All CQI information shall be decoded (no exclusion due to DTX).

The test is applicable to all BS. A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidths supported by the BS are applicable.

## 8.3.8.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.3.2.1.

## 8.3.8.3 Test purpose

The test shall verify the receiver"s ability to detect CQI under multipath fading propagation conditions for a given SNR.

## 8.3.8.4 Method of test

8.3.8.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7

1) Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.5.

#### 8.3.8.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth defined in Table 8.3.8.4.2-1.

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

Channel bandwidth [MHz]	AWGN power level				
1.4	-89.7 dBm / 1.08MHz				
3	-85.7 dBm / 2.7MHz				
5	-83.5 dBm / 4.5MHz				
10	-80.5 dBm / 9MHz				
15	-78.7 dBm / 13.5MHz				
20	-77.4 dBm / 18MHz				

 Table 8.3.8.4.2-1: AWGN power level at the BS input

- 2) Signals transmitted on two antenna ports are on the same PUCCH resource block with different channel indices as presented in Annex A.10. The characteristics of the wanted signal shall be configured according to TS 36.211. The CQI information bit payload per sub-frame is equal to 4 bits.
- 3) The multipath fading emulators shall be configured according to the corresponding channel model defined in Annex B.
- 4) Adjust the equipment so that the SNR specified in Table 8.3.8.5-1 is achieved at the BS input during the CQI transmissions.
- 5) The signal generator sends a test pattern with the pattern outlined in figure 8.3.8.4.2-1. The following statistics are kept: the number of incorrectly decoded CQI.

CQI

CQI	CQI	•••
		]

#### Figure 8.3.8.4.2-1 Test signal pattern for PUCCH format 2 demodulation tests

#### 8.3.8.5 Test Requirement

The fraction of incorrectly decoded CQIs shall be less than 1% for the SNR listed in Table 8.3.8.5-1.

Number	Number	Cyclic	Propagation							
of TX antennas	of RX antennas	Prefix	conditions and correlation matrix (Annex B)	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
2	2	Normal	EVA 5 Low	-4.9	-4.8	-5.1	-5.0	-5.1	-5.1	

#### Table 8.3.8.5-1 Required SNR for PUCCH format 2 demodulation tests

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

# 8.3.9 CQI performance requirements for PUCCH format 2 with DTX detection

## 8.3.9.1 Definition and applicability

The requirements in this subclause apply to a BS supporting PUCCH format 2 with DTX. It is optional for a BS to support PUCCH format 2 with DTX.

A BS may meet the PUCCH format 2 requirements specified in Section 8.3.9 instead of requirements specified in Section 8.3.2 and Section 8.3.8 for single antenna port and two antenna ports, respectively.

The performance requirement of PUCCH format 2 for CQI is determined by the block error probability (BLER) of CQI. The CQI block error probability (BLER) is defined as the sum of the:

- conditional probability of incorrectly decoding the CQI information when the CQI information is sent and

- conditional probability of detecting UE transmission as DTX, when the CQI information is sent.

The CQI false alarm probability is defined as the conditional probability of false detecting the CQI information transmitted from UE when no CQI information is sent.

The performance is measured by the required SNR at CQI BLER of 1% and CQI false alarm rate of 10%.

A test for a specific channel bandwidth is only applicable if the BS supports it.

For a BS supporting multiple channel bandwidths only the tests for the lowest and the highest channel bandwidths supported by the BS are applicable.

#### 8.3.9.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.3.8.1.

#### 8.3.9.3 Test purpose

The test shall verify the receiver's ability to detect CQI under multipath fading propagation conditions for a given SNR.

#### 8.3.9.4 Method of test

#### 8.3.9.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7

 Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.2 for single transmit antenna port, and in Annex I.3.5 for two antenna ports.

#### 8.3.9.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth defined in Table 8.3.9.4.2-1.

Channel bandwidth [MHz]	AWGN power level			
1.4	-89.7 dBm / 1.08MHz			
3	-85.7 dBm / 2.7MHz			
5	-83.5 dBm / 4.5MHz			
10	-80.5 dBm / 9MHz			
15	-78.7 dBm / 13.5MHz			
20	-77.4 dBm / 18MHz			

Table 8.3.9.4.2-1: AWGN power level at the BS input

- For two antenna ports, transmitted signals are on the same PUCCH resource block with different channel indices as presented in Annex A.10. The characteristics of the wanted signal shall be configured according to TS 36.211. The CQI information bit payload per sub-frame is equal to 4 bits.
- 3) The multipath fading emulators shall be configured according to the corresponding channel model defined in Annex B.
- 4) Adjust the equipment so that the SNR specified in Table 8.3.9.5-1 is achieved at the BS input during the CQI transmissions.
- 5) The signal generator sends a test pattern with the pattern outlined in figure 8.3.9.4.2-1. The following statistics are kept: the number of incorrectly decoded CQI, and the number of incorrectly detected DTX.

CQI		CQI		CQI	•••
-----	--	-----	--	-----	-----

#### Figure 8.3.9.4.2-1 Test signal pattern for PUCCH format 2 demodulation tests

#### 8.3.9.5 Test Requirement

The CQI false alarm probability and the CQI block error probability shall not exceed 10% and 1%, respectively, at the SNR given in table 8.3.9.5-1.

Number	Number	Cyclic	Cyclic Propagation Channel Bandwidth / SNR [dB]						
of TX antennas	of RX antennas	Prefix	conditions and correlation matrix (Annex B)	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
1	2	Normal	EVA 5* Low	-3.1	-3.4	-3.8	-3.4	-3.6	-3.6
			ETU 70** Low	-3.1	-3.4	-3.1	-3.5	-3.3	-3.5
2	2	Normal	EVA 5 Low	-4.5	-4.4	-4.7	-4.6	-4.5	-4.7
Note*: Not	Note*: Not applicable for Wide Area BS and Medium Range BS.								
Note**: Not	applicable fo	r Local Area	BS and Home BS	S.					

#### Table 8.3.9.5-1 Required SNR for PUCCH format 2 demodulation tests with DTX detection

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

# 8.4 Performance requirements for PRACH

# 8.4.1 PRACH false alarm probability and missed detection

## 8.4.1.1 Definition and applicability

The performance requirement of PRACH for preamble detection is determined by the two parameters: total probability of false detection of the preamble (Pfa) and the probability of detection of preamble (Pd). The performance is measured by the required SNR at probability of detection, Pd of 99%. Pfa shall be 0.1% or less.

Pfa is defined as a conditional total probability of erroneous detection of the preamble (i.e. erroneous detection from any detector) when input is only noise.

Pd is defined as conditional probability of detection of the preamble when the signal is present. The erroneous detection consists of several error cases – detecting different preamble than the one that was sent, not detecting a preamble at all or correct preamble detection but with the wrong timing estimation. For AWGN, a timing estimation error occurs if the estimation error of the timing of the strongest path is larger than 1.04us. For ETU70, a timing estimation error occurs if the estimation error of the timing of the strongest path is larger than 2.08us. The strongest path for the timing estimation error refers to the strongest path (i.e. average of the delay of all paths having the same highest gain = 310ns for ETU) in the power delay profile.

The normal mode test is applicable to all BS. The high speed mode test is applicable to high speed BS.

## 8.4.1.2 Minimum Requirement

The minimum requirement is in TS 36.104 [2] subclause 8.4.1.1 and 8.4.2.1.

#### 3GPP TS 36.141 version 11.9.0 Release 11

204

#### 8.4.1.3 Test purpose

The test shall verify the receiver's ability to detect PRACH preamble under multipath fading propagation conditions for a given SNR.

#### 8.4.1.4 Method of test

#### 8.4.1.4.1 Initial Conditions

Test environment: Normal, see subclause D.2.

RF channels to be tested: M; see subclause 4.7

 Connect the BS tester generating the wanted signal, multipath fading simulators and AWGN generators to all BS antenna connectors for diversity reception via a combining network as shown in Annex I.3.1 or Annex I.3.2 as applicable.

#### 8.4.1.4.2 Procedure

1) Adjust the AWGN generator, according to the channel bandwidth.

Channel bandwidth [MHz]	AWGN power level
1.4	-89.7 dBm / 1.08MHz
3	-85.7 dBm / 2.7MHz
5	-83.5 dBm / 4.5MHz
10	-80.5 dBm / 9MHz
15	-78.7 dBm / 13.5MHz
20	-77.4 dBm / 18MHz

Table 8.4.1.4.2-1	: AWGN power	level at the BS input
-------------------	--------------	-----------------------

- 2) The characteristics of the wanted signal shall be configured according to the corresponding UL reference measurement channel defined in Annex A.
- 3) The multipath fading emulators shall be configured according to the corresponding channel model defined in Annex B.
- 4) Adjust the frequency offset of the test signal according to Table 8.4.1.5-1 or 8.4.1.5-2.
- 5) Adjust the equipment so that the SNR specified in Table 8.4.1.5-1 or 8.4.1.5-2 is achieved at the BS input during the PRACH preambles.
- 6) The test signal generator sends a preamble and the receiver tries to detect the preamble. This pattern is repeated as illustrated in figure 8.4.1.4.2-1. The preambles are sent with certain timing offsets as described below. The following statistics are kept: the number of preambles detected in the idle period and the number of missed preambles.

Preamble	Prear	ble • •

#### Figure 8.4.1.4.2-1 PRACH preamble test pattern

The timing offset base value is set to 50% of Ncs. This offset is increased within the loop, by adding in each step a value of 0.1us, until the end of the tested range, which is 0.9us. Then the loop is being reset and the timing offset is set again to 50% of Ncs. The timing offset scheme is presented in Figure 8.4.1.4.2-2.

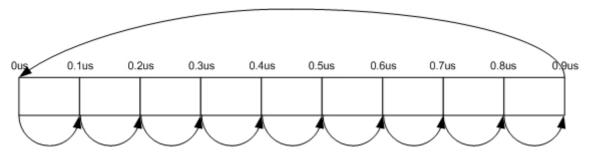


Figure 8.4.1.4.2-2 Timing offset scheme

## 8.4.1.5 Test Requirement

Pfa shall not exceed 0.1%. Pd shall not be below 99% for the SNRs in Table 8.4.1.5-1 and 8.4.1.5-2.

Number of	Number	Propagation	Frequency			SNR [dB]		
TX antennas	of RX antennas	conditions and correlation matrix (Annex B)	offset	Burst format 0	Burst format 1	Burst format 2	Burst format 3	Burst format 4
1	2	AWGN	0	-13.9	-13.9	-16.1	-16.2	-6.9
		ETU 70 Low*	270 Hz	-7.4	-7.2	-9.4	-9.5	0.5
	4	AWGN	0	-16.6	-16.4	-18.7	-18.5	-9.5
		ETU 70 Low*	270 Hz	-11.5	-11.1	-13.5	-13.3	-4.5
Note*: Not appli	cable for Loc	al Area BS and Home I	BS.					

The requirements in Table 8.4.1.5-2 shall not be applied to Local Area BS and Home BS

Number of	Number of	Propagation	opagation Frequency SNR [dB]				
TX antennas	RX antennas	conditions and correlation matrix (Annex B)	offset	Burst format 0	Burst format 1	Burst format 2	Burst format 3
1	2	AWGN	0	-13.8	-13.9	-16.0	-16.3
	[	ETU 70 Low	270 Hz	-6.8	-6.7	-8.7	-8.9
		AWGN	625 Hz	-12.1	-12.0	-14.1	-14.1
		AWGN	1340 Hz	-13.1	-13.2	-15.2	-15.4
	4	AWGN	0	-16.6	-16.3	-18.6	-18.5
		ETU 70 Low	270 Hz	-11.2	-10.8	-13.1	-13.1
		AWGN	625 Hz	-14.6	-14.3	-16.5	-16.5
		AWGN	1340 Hz	-15.6	-15.2	-17.5	-17.5

NOTE: If the above Test Requirement differs from the Minimum Requirement then the Test Tolerance applied for this test is non-zero. The Test Tolerance for this test and the explanation of how the Minimum Requirement has been relaxed by the Test Tolerance is given in Annex G.

# Annex A (normative): Reference Measurement channels

# A.0 General

The parameters for the reference measurement channels are specified in clause A.1 for reference sensitivity and inchannel selectivity and in clause A.2 for dynamic range.

A schematic overview of the encoding process for the reference measurement channels is provided in Figure A0-1.

Receiver requirements in the present document are defined with a throughput stated relative to the Maximum throughput of the FRC. The Maximum throughput for an FRC equals the Payload size \* the Number of uplink subframes per second. For FDD, 1000 uplink sub-frames per second are used.

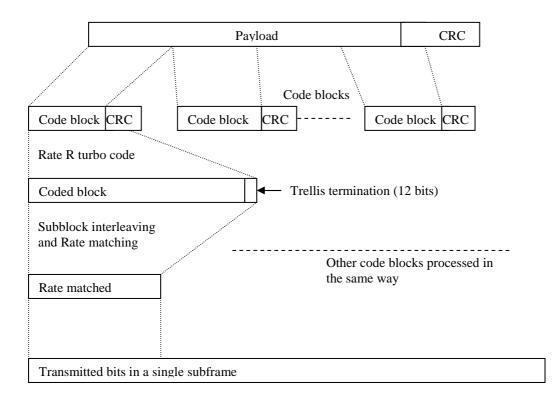


Figure A0-1. Schematic overview of the encoding process

# A.1 Fixed Reference Channels for reference sensitivity and in--channel selectivity (QPSK, R=1/3)

The parameters for the reference measurement channels are specified in Table A.1-1 for reference sensitivity and in-channel selectivity

Reference channel	A1-1	A1-2	A1-3	A1-4	A1-5
Allocated resource blocks	6	15	25	3	9
DFT-OFDM Symbols per subframe	12	12	12	12	12
Modulation	QPSK	QPSK	QPSK	QPSK	QPSK
Code rate	1/3	1/3	1/3	1/3	1/3
Payload size (bits)	600	1544	2216	256	936
Transport block CRC (bits)	24	24	24	24	24
Code block CRC size (bits)	0	0	0	0	0
Number of code blocks - C	1	1	1	1	1
Coded block size including 12bits trellis termination (bits)	1884	4716	6732	852	2892
Total number of bits per sub-frame	1728	4320	7200	864	2592
Total symbols per sub-frame	864	2160	3600	432	1296

 Table A.1-1 FRC parameters for reference sensitivity and in-channel selectivity

# A.2 Fixed Reference Channels for dynamic range (16QAM, R=2/3)

The parameters for the reference measurement channels are specified in Table A.2-1 for dynamic range.

Reference channel	A2-1	A2-2	A2-3
Allocated resource blocks	6	15	25
DFT-OFDM Symbols per subframe	12	12	12
Modulation	16QAM	16QAM	16QAM
Code rate	2/3	2/3	2/3
Payload size (bits)	2344	5992	9912
Transport block CRC (bits)	24	24	24
Code block CRC size (bits)	0	0	24
Number of code blocks – C	1	1	2
Coded block size including 12bits trellis	7116	18060	14988
termination (bits)			
Total number of bits per sub-frame	3456	8640	14400
Total symbols per sub-frame	864	2160	3600

#### Table A.2-1 FRC parameters for dynamic range

# A.3 Fixed Reference Channels for performance requirements (QPSK 1/3)

Table A.3-1 FRC parameter	s for performance	requirements	(QPSK 1/3)
---------------------------	-------------------	--------------	------------

Reference channel	A3-1	A3-2	A3-3	A3-4	A3-5	A3-6	A3-7
Allocated resource blocks	1	6	15	25	50	75	100
DFT-OFDM Symbols per subframe	12	12	12	12	12	12	12
Modulation	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK
Code rate	1/3	1/3	1/3	1/3	1/3	1/3	1/3
Payload size (bits)	104	600	1544	2216	5160	6712	10296
Transport block CRC (bits)	24	24	24	24	24	24	24
Code block CRC size (bits)	0	0	0	0	0	24	24
Number of code blocks - C	1	1	1	1	1	2	2
Coded block size including 12bits trellis termination (bits)	396	1884	4716	6732	15564	10188	15564
Total number of bits per sub-frame	288	1728	4320	7200	14400	21600	28800
Total symbols per sub-frame	144	864	2160	3600	7200	10800	14400

# A.4 Fixed Reference Channels for performance requirements (16QAM 3/4)

Reference channel	A4-1	A4-2	A4-3	A4-4	A4-5	A4-6	A4-7	A4-8
Allocated resource blocks	1	1	6	15	25	50	75	100
DFT-OFDM Symbols per subframe	12	10	12	12	12	12	12	12
Modulation	16QAM							
Code rate	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4
Payload size (bits)	408	376	2600	6456	10680	21384	32856	43816
Transport block CRC (bits)	24	24	24	24	24	24	24	24
Code block CRC size (bits)	0	0	0	24	24	24	24	24
Number of code blocks - C	1	1	1	2	2	4	6	8
Coded block size including 12bits trellis termination (bits)	1308	1212	7884	9804	16140	16140	16524	16524
Total number of bits per sub-frame	576	480	3456	8640	14400	28800	43200	57600
Total symbols per sub-frame	144	120	864	2160	3600	7200	10800	14400

A.5 Fixed Reference Channels for performance requirements (64QAM 5/6)

#### Table A.5-1 FRC parameters for performance requirements (64QAM 5/6)

Reference channel	A5-1	A5-2	A5-3	A5-4	A5-5	A5-6	A5-7
Allocated resource blocks	1	6	15	25	50	75	100
DFT-OFDM Symbols per subframe	12	12	12	12	12	12	12
Modulation	64QAM						
Code rate	5/6	5/6	5/6	5/6	5/6	5/6	5/6
Payload size (bits)	712	4392	11064	18336	36696	55056	75376
Transport block CRC (bits)	24	24	24	24	24	24	24
Code block CRC size (bits)	0	0	24	24	24	24	24
Number of code blocks - C	1	1	2	3	6	9	13
Coded block size including 12bits trellis termination (bits)	2220	13260	16716	18444	18444	18444	17484
Total number of bits per sub-frame	864	5184	12960	21600	43200	64800	86400
Total symbols per sub-frame	144	864	2160	3600	7200	10800	14400

# A.6 PRACH Test preambles

#### Table A.6-1 Test preambles for Normal Mode

Burst format	Ncs	Logical sequence index	v
0	13	22	32
1	167	22	2
2	167	22	0
3	0	22	0
4	10	0	0

Burst format	Ncs	Logical sequence index	v
0	15	384	0
1	202	384	0
2	202	384	0
3	237	384	0

Table A.6-2 Test preambles for High speed Mode

# A.7 Fixed Reference Channels for UL timing adjustment (Scenario 1)

Table A.7-1 FRC parameters for	UL timing adjustment (	Scenario 1)
--------------------------------	------------------------	-------------

Reference channel	A7-1	A7-2	A7-3	A7-4	A7-5	A7-6
Allocated resource blocks	3	6	12	25	25	25
DFT-OFDM Symbols per subframe	12	12	12	12	12	12
Modulation	16QAM	16QAM	16QAM	16QAM	16QAM	16QAM
Code rate	3/4	3/4	3/4	3/4	3/4	3/4
Payload size (bits)	1288	2600	5160	10680	10680	10680
Transport block CRC (bits)	24	24	24	24	24	24
Code block CRC size (bits)	0	0	0	24	24	24
Number of code blocks - C	1	1	1	2	2	2
Coded block size including 12bits trellis termination (bits)	3948	7884	15564	16140	16140	16140
Total number of bits per sub-frame	1728	3456	6912	14400	14400	14400
Total symbols per sub-frame	432	864	1728	3600	3600	3600
SRS bandwidth configuration (See TS 36.211, 5.5.3) (Note 1)	7	5	3	2	5	2
SRS-Bandwidth b (See TS 36.211, 5.5.3) (Note 1, 2)	0	0	0	0	0	1
Note 1. The transmission of SRS is optional Note 2. PUSCH resource blocks shall be included in SRS resource blocks						

# A.8 Fixed Reference Channels for UL timing adjustment (Scenario 2)

#### Table A.8-1 FRC parameters for UL timing adjustment (Scenario 2)

Reference channel	A8-1	A8-2	A8-3	A8-4	A8-5	A8-6
Allocated resource blocks	3	6	12	25	25	25
DFT-OFDM Symbols per subframe	12	12	12	12	12	12
Modulation	QPSK	QPSK	QPSK	QPSK	QPSK	QPSK
Code rate	1/3	1/3	1/3	1/3	1/3	1/3
Payload size (bits)	256	600	1224	2216	2216	2216
Transport block CRC (bits)	24	24	24	24	24	24
Code block CRC size (bits)	0	0	0	0	0	0
Number of code blocks - C	1	1	1	1	1	1
Coded block size including 12bits trellis termination (bits)	852	1884	3756	6732	6732	6732
Total number of bits per sub-frame	864	1728	3456	7200	7200	7200
Total symbols per sub-frame	432	864	1728	3600	3600	3600
SRS bandwidth configuration (See TS 36.211, 5.5.3) (Note 1)	7	5	3	2	5	2
SRS-Bandwidth b (See TS 36.211, 5.5.3) (Note 1, 2)	0	0	0	0	0	1
Note 1. The transmission of SRS is optional Note 2. PUSCH resource blocks shall be included in SRS resource blocks						

# A.9 Multi user PUCCH test

#### Table A.9-1 Test parameters for multi user PUCCH case

	Resource index for PUCCH formats 1/1a/1b $n_{\rm PUCCH}^{(1)}$	Relative power [dB]	Relative timing [ns]			
Tested signal	2	-	-			
Interferer 1	1	0				
Interferer 2	7	-3	0			
Interferer 3	14	3				
NOTE1: The following parameters shall be used $N_{\rm ID}^{\rm cell} = 150$ , $N_{\rm cs}^{(1)} = 0$ and $\Delta_{\rm shift}^{\rm PUCCH} = 2$ .						
NOTE2: All above listed signals are transmitted on the same PUCCH resource block, with different PUCCH resource indices as presented above.						

# A.10 PUCCH transmission on two antenna ports test

#### Table A.10-1 Test parameters for PUCCH transmission on two antenna ports case

	PUCCH format	Resource indices for two antenna ports		
	Format 1a	$n_{\text{PUCCH}}^{(1,p=p_0)} = 1, n_{\text{PUCCH}}^{(1,p=p_1)} = 2$		
	Format 2	$n_{\text{PUCCH}}^{(2, p=p_0)} = 1, n_{\text{PUCCH}}^{(2, p=p_1)} = 2$		
NOTE1:	NOTE1: The following parameters shall be used $N_{\text{ID}}^{\text{cell}} = 150$ , $N_{\text{cs}}^{(1)} = 0$ . For PUCCH format 1a, $\Delta_{\text{shift}}^{\text{PUCCH}} = 2$ is			
NOTE2:	assumed.			

# Annex B (normative): Propagation conditions

# B.1 Static propagation condition

The propagation for the static performance measurement is an Additive White Gaussian Noise (AWGN) environment. No fading or multi-paths exist for this propagation model.

# B.2 Multi-path fading propagation conditions

Tables B.2-1 - B.2-3 show multi-path delay profiles that are used for the performance measurements in multi-path fading environment. All taps have classical Doppler spectrum, defined as:

(CLASS)

$$S(f) \propto 1/(1 - (f/f_D)^2)^{0.5}$$
 for  $f \in -f_D, f_D$ .

Excess tap delay [ns]	Relative power [dB]
0	0.0
30	-1.0
70	-2.0
90	-3.0
110	-8.0
190	-17.2
410	-20.8

#### Table B.2-1 Extended Pedestrian A model (EPA)

Table B.2-2 Extended	Vehicular	A model	(EVA)
----------------------	-----------	---------	-------

Excess tap delay [ns]	Relative power [dB]
0	0.0
30	-1.5
150	-1.4
310	-3.6
370	-0.6
710	-9.1
1090	-7.0
1730	-12.0
2510	-16.9

#### Table B.2-3 Extended Typical Urban model (ETU)

Excess tap delay [ns]	Relative power [dB]
0	-1.0
50	-1.0
120	-1.0
200	0.0
230	0.0
500	0.0
1600	-3.0
2300	-5.0
5000	-7.0

A multipath fading propagation condition is defined by a combination of a multi-path delay profile and a maximum Doppler frequency  $f_D$  which is either 5, 70 or 300 Hz. In addition, 200 Hz Doppler frequency is specified for UL timing adjustment performance requirement.

# B.3 High speed train condition

High speed train conditions are as follows:

Scenario 1: Open space

Scenario 3: Tunnel for multi-antennas

The high speed train conditions for the test of the baseband performance are two non-fading propagation channels in both scenarios. For BS with Rx diversity defined in scenario 1, the Doppler shift variation is the same between antennas.

Doppler shift for both scenarios is given by:

$$f_s(t) = f_d \cos \theta(t) \tag{B.3.1}$$

where  $f_s(t)$  is the Doppler shift and  $f_d$  is the maximum Doppler frequency. The cosine of angle  $\theta(t)$  is given by:

$$\cos\theta(t) = \frac{D_s/2 - vt}{\sqrt{D_{\min}^2 + (D_s/2 - vt)^2}}, \ 0 \le t \le D_s/v$$
(B.3.2)

$$\cos\theta(t) = \frac{-1.5D_s + vt}{\sqrt{D_{\min}^2 + (-1.5D_s + vt)^2}}, \ D_s/v < t \le 2D_s/v$$

(B.3.3)

$$\cos\theta(t) = \cos\theta(t \mod (2D_s/v)), \ t > 2D_s/v \tag{B.3.4}$$

where  $D_s/2$  is the initial distance of the train from BS, and  $D_{\min}$  is BS-Railway track distance, both in meters; v is the velocity of the train in m/s, t is time in seconds.

Doppler shift and cosine angle is given by equations B.3.1 and B.3.2-B.3.4 respectively, where the required input parameters listed in Table B.3-1 and the resulting Doppler shift is shown in Figure B.3-1 and B.3-2 are applied for all frequency bands.

Parameter	Value		
	Scenario 1	Scenario 3	
$D_s$	1000 m	300 m	
$D_{\min}$	50 m	2 m	
v	350 km/h	300 km/h	
$f_d$	1340 Hz	1150 Hz	

#### Table B.3-1: Parameters for high speed train conditions

NOTE1: Parameters for HST conditions in table B.3-1 including  $f_d$  and Doppler shift trajectories presented on figures B.3-1 and B.3-2 were derived for Band 1.


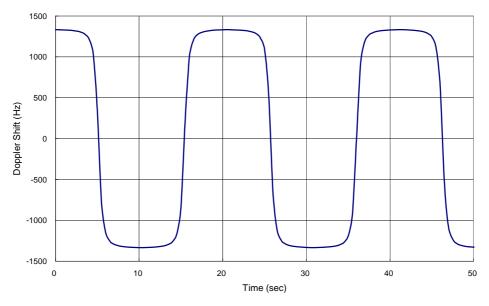


Figure B.3-1: Doppler shift trajectory for scenario 1



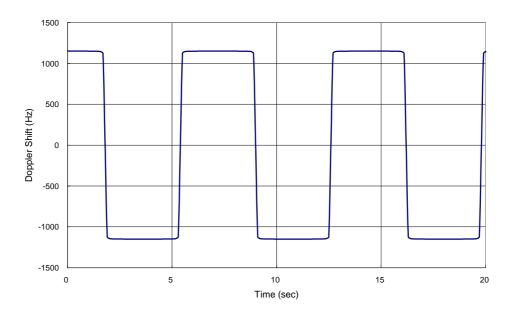

# B.4 Moving propagation conditions

Figure B.4-1 illustrates the moving propagation conditions for the test of the UL timing adjustment performance. The time difference between the reference timing and the first tap is according Equation (B.4-1). The timing difference between moving UE and stationary UE is equal to  $\Delta \tau - (T_A - 31) \times 16T_s$ . The relative timing among all taps is fixed. The parameters for the moving propagation conditions are shown in Table B.4-1.

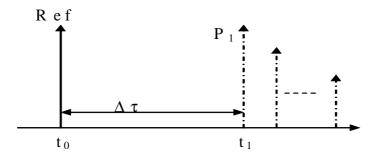


Figure B.4-1: Moving propagation conditions

$$\Delta \tau = \frac{A}{2} \cdot \sin(\Delta \omega \cdot t) \tag{B.4-1}$$

#### Table B.4-1: Parameters for UL timing adjustment

Parameter	Scenario 1	Scenario 2	
Channel model	Stationary UE: AWGN Moving UE: ETU200	AWGN	
UE speed	120 km/h	350 km/h	
CP length	Normal	Normal	
А	10 μs	10 μs	
Δω	0.04 s <sup>-1</sup>	0.13 s <sup>-1</sup>	

- NOTE 1: Multipath fading propagation conditions for Scenario 1 were derived for Band 1 with additional rounding applied to the Doppler frequency calculated for the specified UE speed.
- NOTE 2: In Scenario 2, the UE speed is only used to calculate  $\Delta \omega$  and the Doppler shift is not applied to the channel.

# B.5 Multi-Antenna channel models

# **B.5.1 Definition of MIMO Correlation Matrices**

Table B.5.1-1 defines the correlation matrix for the eNodeB:

	One antenna	Two antennas	Four antennas
eNode B Correlation	$R_{eNB} = 1$	$R_{eNB} = \begin{pmatrix} 1 & \alpha \\ \alpha^* & 1 \end{pmatrix}$	$R_{eNB} = \begin{pmatrix} 1 & \alpha^{\frac{1}{9}} & \alpha^{\frac{4}{9}} & \alpha \\ \alpha^{\frac{1}{9}} & 1 & \alpha^{\frac{1}{9}} & \alpha^{\frac{4}{9}} \\ \alpha^{\frac{4}{9}} & \alpha^{\frac{1}{9}} & 1 & \alpha^{\frac{1}{9}} \\ \alpha^{\ast} & \alpha^{\frac{4}{9}} & \alpha^{\frac{1}{9}} & 1 \end{pmatrix}$

#### Table B.5.1-1 eNodeB correlation matrix

Table B.5.1-2 defines the correlation matrix for the UE:

	One antenna	Two antennas	Four antennas
UE Correlation	$R_{UE} = 1$	$R_{UE} = \begin{pmatrix} 1 & \beta \\ \beta^* & 1 \end{pmatrix}$	$R_{UE} = \begin{pmatrix} 1 & \beta^{\frac{1}{9}} & \beta^{\frac{4}{9}} & \beta \\ \beta^{\frac{1}{9}^{*}} & 1 & \beta^{\frac{1}{9}} & \beta^{\frac{4}{9}} \\ \beta^{\frac{4}{9}^{*}} & \beta^{\frac{1}{9}^{*}} & 1 & \beta^{\frac{1}{9}} \\ \beta^{*} & \beta^{\frac{4}{9}^{*}} & \beta^{\frac{1}{9}^{*}} & 1 \end{pmatrix}$

Table B.5.1-3 defines the channel spatial correlation matrix  $R_{spat}$ . The parameters  $\alpha$  and  $\beta$  in Table B.5.1-3 defines the spatial correlation between the antennas at the eNodeB and UE.

1x2 case	$R_{spat} = R_{eNB} = \begin{pmatrix} 1 & \alpha \\ \alpha^* & 1 \end{pmatrix}$
2x2 case	$R_{spat} = R_{UE} \otimes R_{eNB} = \begin{bmatrix} 1 & \beta \\ \beta^* & 1 \end{bmatrix} \otimes \begin{bmatrix} 1 & \alpha \\ \alpha^* & 1 \end{bmatrix} = \begin{bmatrix} 1 & \alpha & \beta & \beta\alpha \\ \alpha^* & 1 & \beta\alpha^* & \beta \\ \beta^* & \beta^*\alpha & 1 & \alpha \\ \beta^*\alpha^* & \beta^* & \alpha^* & 1 \end{bmatrix}$
2x4 case	$R_{spat} = R_{UE} \otimes R_{eNB} = \begin{bmatrix} 1 & \beta \\ \beta^* & 1 \end{bmatrix} \otimes \begin{bmatrix} 1 & \alpha^{\frac{1}{9}} & \alpha^{\frac{3}{9}} & \alpha \\ \alpha^{\frac{1}{9}} & 1 & \alpha^{\frac{1}{9}} & \alpha^{\frac{4}{9}} \\ \alpha^{\frac{4}{9}} & \alpha^{\frac{1}{9}} & 1 & \alpha^{\frac{1}{9}} \end{bmatrix}$
4x4 case	$R_{spat} = R_{UE} \otimes R_{eNB} = \begin{pmatrix} 1 & \beta^{\frac{1}{9}} & \beta^{\frac{4}{9}} & \beta \\ \beta^{\frac{1}{9^{*}}} & 1 & \beta^{\frac{1}{9}} & \beta^{\frac{4}{9}} \\ \beta^{\frac{4}{9^{*}}} & \beta^{\frac{1}{9^{*}}} & 1 & \beta^{\frac{1}{9}} \\ \beta^{\frac{4}{9^{*}}} & \beta^{\frac{4}{9^{*}}} & \beta^{\frac{1}{9^{*}}} & 1 \end{pmatrix} \otimes \begin{bmatrix} 1 & \alpha^{\frac{1}{9}} & \alpha^{\frac{4}{9}} & \alpha \\ \alpha^{\frac{1}{9^{*}}} & 1 & \alpha^{\frac{1}{9}} & \alpha^{\frac{4}{9}} \\ \alpha^{\frac{4}{9^{*}}} & \alpha^{\frac{1}{9^{*}}} & 1 & \alpha^{\frac{1}{9}} \\ \alpha^{\frac{4}{9^{*}}} & \alpha^{\frac{4}{9^{*}}} & \alpha^{\frac{1}{9^{*}}} & 1 \end{bmatrix}$

Table B.5.1-3:  $R_{spat}$  correlation matrices

For cases with more antennas at either eNodeB or UE or both, the channel spatial correlation matrix can still be expressed as the Kronecker product of  $R_{UE}$  and  $R_{eNB}$  according to  $R_{spat} = R_{UE} \otimes R_{eNB}$ .

# B.5.2 MIMO Correlation Matrices at High, Medium and Low Level

The  $\alpha$  and  $\beta$  for different correlation types are given in Table B.5.2-1.

Low correlation		Medium Correlation		High Correlation		
	α	β	α	β	α	β
	0	0	0.9	0.3	0.9	0.9

The correlation matrices for high, medium and low correlation are defined in Table B.5.2-2, B.5.2-3 and B.5.2-4 as below.

The values in Table B.5.2-2 have been adjusted for the 2x4 and 4x4 high correlation cases to insure the correlation matrix is positive semi-definite after round-off to 4 digit precision. This is done using the equation:

$$\mathbf{R}_{high} = [\mathbf{R}_{spatial} + aI_n]/(1+a)$$

Where the value 'a' is a scaling factor such that the smallest value is used to obtain a positive semi-definite result. For the 2x4 high correlation case, a=0.00010. For the 4x4 high correlation case, a=0.00012.

The same method is used to adjust the 4x4 medium correlation matrix in Table B.5.2-3 to insure the correlation matrix is positive semi-definite after round-off to 4 digit precision with a =0.00012.

1x2 case	$R_{high} = \begin{pmatrix} 1 & 0.9 \\ 0.9 & 1 \end{pmatrix}$							
2x2 case	$R_{high} = \begin{pmatrix} 1 & 0.9 & 0.9 & 0.81 \\ 0.9 & 1 & 0.81 & 0.9 \\ 0.9 & 0.81 & 1 & 0.9 \\ 0.81 & 0.9 & 0.9 & 1 \end{pmatrix}$							
2x4 case	$R_{high} = \begin{bmatrix} 1.0000 & 0.9883 & 0.9542 & 0.8999 & 0.8999 & 0.8894 & 0.8587 & 0.8099 \\ 0.9883 & 1.0000 & 0.9883 & 0.9542 & 0.8894 & 0.8999 & 0.8894 & 0.8587 \\ 0.9542 & 0.9883 & 1.0000 & 0.9883 & 0.8587 & 0.8894 & 0.8999 & 0.8894 \\ 0.8999 & 0.9542 & 0.9883 & 1.0000 & 0.8099 & 0.8587 & 0.8894 & 0.8999 \\ 0.8999 & 0.8894 & 0.8587 & 0.8099 & 1.0000 & 0.9883 & 0.9542 & 0.8999 \\ 0.8999 & 0.8894 & 0.8587 & 0.8099 & 1.0000 & 0.9883 & 0.9542 & 0.8999 \\ 0.8999 & 0.8894 & 0.8587 & 0.8894 & 0.9542 & 0.9883 & 0.9542 \\ 0.8587 & 0.8894 & 0.8999 & 0.8894 & 0.9542 & 0.9883 & 1.0000 & 0.9883 \\ 0.8099 & 0.8587 & 0.8894 & 0.8999 & 0.8999 & 0.9542 & 0.9883 & 1.0000 \end{bmatrix}$							
4x4 case	$R_{high} = \begin{bmatrix} 1.0000 \ 0.9882 \ 0.9541 \ 0.8999 \ 0.9882 \ 0.9767 \ 0.9430 \ 0.8894 \ 0.9541 \ 0.9430 \ 0.9105 \ 0.8587 \ 0.8999 \ 0.8894 \ 0.8587 \ 0.8999 \ 0.8894 \ 0.8587 \ 0.8999 \ 0.8894 \ 0.8587 \ 0.8999 \ 0.8894 \ 0.8587 \ 0.8999 \ 0.8894 \ 0.8587 \ 0.8999 \ 0.8894 \ 0.8587 \ 0.9541 \ 0.9882 \ 1.0000 \ 0.9882 \ 0.9767 \ 0.9882 \ 0.9767 \ 0.9105 \ 0.9430 \ 0.9541 \ 0.9430 \ 0.8587 \ 0.8894 \ 0.8999 \ 0.8894 \ 0.8999 \ 0.8894 \ 0.8999 \ 0.8894 \ 0.8999 \ 0.8894 \ 0.8999 \ 0.8894 \ 0.8999 \ 0.8894 \ 0.8999 \ 0.9541 \ 0.9882 \ 1.0000 \ 0.9882 \ 0.9767 \ 0.9105 \ 0.9430 \ 0.9541 \ 0.9430 \ 0.9541 \ 0.9430 \ 0.9541 \ 0.9430 \ 0.9541 \ 0.9430 \ 0.9541 \ 0.9430 \ 0.9541 \ 0.9430 \ 0.9105 \ 0.8894 \ 0.8999 \ 0.8894 \ 0.8999 \ 0.8894 \ 0.8999 \ 0.8894 \ 0.8999 \ 0.9882 \ 0.9767 \ 0.9430 \ 0.9541$							

Table B.5.2-2: MIMO correlation matrices for high correlation

1x2 case					N/A				
2x2 case		R	$_{medium} = \begin{vmatrix} 0\\0 \end{vmatrix}$	.9000 1 .3000 0	.9000 .0000 .2700 .3000	$\begin{array}{c} 0.3000 \\ 0.2700 \\ 1.0000 \\ 0.9000 \end{array}$	$\begin{array}{c} 0.2700 \\ 0.3000 \\ 0.9000 \\ 1.0000 \end{array} \right)$		
2x4 case	R <sub>medium</sub> =	$\left(\begin{array}{c}1.0000\\0.9884\\0.9543\\0.9000\\0.3000\\0.2965\\0.2863\\0.2700\end{array}\right)$	1.0000 0.9884 0.9543 0.2965 0.3000 0.2965	0.9884 1.0000 0.9884 0.2863 0.2965 0.3000	9000 ( 0.9543 0.9884 1.0000 0.2700 0.2863 0.2965 0.3000	0.3000 0.2965 0.2863 0.2700 1.0000 0.9884 0.9543 0.9000	$\begin{array}{c} 0.2965 \\ 0.3000 \\ 0.2965 \\ 0.2863 \\ 0.9884 \\ 1.0000 \\ 0.9884 \\ 0.9543 \end{array}$	$\begin{array}{cccc} 0.2863 & 0 \\ 0.2965 \\ 0.3000 \\ 0.2965 \\ 0.9543 \\ 0.9884 \\ 1.0000 \\ 0.9884 \end{array}$	$\begin{array}{c} 0.2700\\ 0.2863\\ 0.2965\\ 0.3000\\ 0.9000\\ 0.9543\\ 0.9884\\ 1.0000 \end{array}$
4x4 case	$R_{medium} = \begin{pmatrix} 1.0000\\ 0.98\\ 0.95\\ 0.89\\ 0.87\\ 0.86\\ 0.83\\ 0.78\\ 0.57\\ 0.55\\ 0.52\\ 0.30\\ 0.29\\ 0.28\\ 0.27 \end{pmatrix}$	82         1.0000         0.9882           41         0.9882         1.0000           99         0.9541         0.9882           47         0.8645         0.8347           45         0.8747         0.8645           47         0.8645         0.8747           50         0.8347         0.8645           55         0.5787         0.5858           80         0.5787         0.5855           70         0.5558         0.5787           88         0.5787         0.5855           70         0.5258         0.5787           00         0.2965         0.2862           65         0.3000         0.2965           62         0.2965         0.3000	0.9541 0.8645 0.9882 0.8347	0.8747 0.8643 0.8645 0.8747 0.8347 0.8643 0.9882 0.9543 1.0000 0.9882 0.9882 1.0000 0.9541 0.9883 0.8645 0.8347 0.8645 0.8347 0.8347 0.8643 0.8347 0.8643 0.8347 0.5588 0.5787 0.5588	5         0.8347         0.2           7         0.8645         0.2           5         0.8747         0.2           1         0.8999         0.3           2         0.9541         0.3           2         0.9541         0.3           2         1.0000         0.7           7         0.7872         1.6           5         0.8347         0.9           5         0.8347         0.3           6         0.8747         0.3           5         0.8747         0.3           6         0.5270         0.3           7         0.5588         0.3           5         0.5787         0.3	5787         0.5855           5588         0.5787           5270         0.5588           8747         0.8645           8845         0.8747           8847         0.8645           7872         0.8347           0000         0.9882           9882         1.0000           9882         1.0082           8999         0.9541           8747         0.8645           8645         0.8747           8347         0.8645	0.5787 0.5588 0.5855 0.5787 0.5787 0.5855 0.8347 0.7872 0.8645 0.8347 0.8747 0.8645 0.8645 0.8747	0.2862         0.2965           0.2700         0.2862           0.5855         0.5787           0.5787         0.5855           0.588         0.5787           0.5270         0.5588           0.8747         0.8645           0.8347         0.8645           0.8747         0.8347           0.8347         0.8645           0.7872         0.8347	0.2965         0.2862           0.3000         0.2965           0.2965         0.3000           0.5588         0.5270           0.5787         0.5588           0.5855         0.5787           0.5787         0.5855           0.8347         0.7872           0.8645         0.8347           0.8645         0.8747           0.8645         0.8747           0.9541         0.8999           0.9882         0.9582

Table B.5.2-3: MIMO correlation matrices for medium correlation

Table B.5.2-4: MIMO correlation matrices for low correlation

1x2 case	$R_{low} = \mathbf{I}_2$
1x4 case	$R_{low} = \mathbf{I}_4$
2x2 case	$R_{low} = \mathbf{I}_4$
2x4 case	$R_{low} = \mathbf{I}_8$
4x4 case	$R_{low} = \mathbf{I}_{16}$

In Table B.5.2-4,  $\mathbf{I}_d$  is a  $d \times d$  identity matrix.

NOTE: For completeness, the 1x2 cases were defined for high, medium and low correlation but for Rel-8 onwards for 1Tx, performance requirements exist only for low correlation.

# Annex C (normative): Characteristics of the interfering signals

#### <Text will be added.>

The interfering signal shall be a PUSCH containing data and reference symbols. Normal cyclic prefix is used. The data content shall be uncorrelated to the wanted signal and modulated according to clause 5 of TS36.211. Mapping of PUSCH modulation to receiver requirement are specified in Table C.1.

Receiver requirement	Modulation
In-channel selectivity	16QAM
Adjacent channel selectivity	QPSK
and narrow-band blocking	
Blocking	QPSK
Receiver intermodulation	QPSK

#### Table C.1.: Modulation of the interfering signal

# Annex D (normative): Environmental requirements for the BS equipment

# D.1 General

For each test in the present document, the environmental conditions under which the BS is to be tested are defined.

## D.2 Normal test environment

When a normal test environment is specified for a test, the test should be performed within the minimum and maximum limits of the conditions stated in Table D.1.

Condition	Minimum	Maximum			
Barometric pressure	86 kPa	106 kPa			
Temperature	15°C	30°C			
Relative Humidity	20 %	85 %			
Power supply	Nominal, as declared by the manufacturer				
Vibration	Negligible				

#### Table D.1: Limits of conditions for Normal Test Environment

The ranges of barometric pressure, temperature and humidity represent the maximum variation expected in the uncontrolled environment of a test laboratory. If it is not possible to maintain these parameters within the specified limits, the actual values shall be recorded in the test report.

NOTE: This may, for instance, be the case for measurements of radiated emissions performed on an open field test site.

## D.3 Extreme test environment

The manufacturer shall declare one of the following:

- 1) the equipment class for the equipment under test, as defined in the IEC 60 721-3-3 [6];
- 2) the equipment class for the equipment under test, as defined in the IEC 60 721-3-4 [7];
- 3) the equipment that does not comply to the mentioned classes, the relevant classes from IEC 60 721 documentation for Temperature, Humidity and Vibration shall be declared.
- NOTE: Reduced functionality for conditions that fall out side of the standard operational conditions are not tested in the present document. These may be stated and tested separately.

#### D.3.1 Extreme temperature

When an extreme temperature test environment is specified for a test, the test shall be performed at the standard minimum and maximum operating temperatures defined by the manufacturer's declaration for the equipment under test.

#### Minimum temperature:

The test shall be performed with the environment test equipment and methods including the required environmental phenomena into the equipment, conforming to the test procedure of IEC 60 068-2-1 [8].

#### Maximum temperature:

The test shall be performed with the environmental test equipment and methods including the required environmental phenomena into the equipment, conforming to the test procedure of IEC 60 068-2-2 [9].

NOTE: It is recommended that the equipment is made fully operational prior to the equipment being taken to its lower operating temperature.

### D.4 Vibration

When vibration conditions are specified for a test, the test shall be performed while the equipment is subjected to a vibration sequence as defined by the manufacturer's declaration for the equipment under test. This shall use the environmental test equipment and methods of inducing the required environmental phenomena in to the equipment, conforming to the test procedure of IEC 60 068-2-6 [10]. Other environmental conditions shall be within the ranges specified in clause D.2.

NOTE: The higher levels of vibration may induce undue physical stress in to equipment after a prolonged series of tests. The testing body should only vibrate the equipment during the RF measurement process.

## D.5 Power supply

When extreme power supply conditions are specified for a test, the test shall be performed at the standard upper and lower limits of operating voltage defined by manufacturer's declaration for the equipment under test.

#### **Upper voltage limit:**

The equipment shall be supplied with a voltage equal to the upper limit declared by the manufacturer (as measured at the input terminals to the equipment). The tests shall be carried out at the steady state minimum and maximum temperature limits declared by the manufacturer for the equipment, to the methods described in IEC 60 068-2-1 [8] Test Ab/Ad and IEC 60 068-2-2 [9] Test Bb/Bd: Dry Heat.

#### Lower voltage limit:

The equipment shall be supplied with a voltage equal to the lower limit declared by the manufacturer (as measured at the input terminals to the equipment). The tests shall be carried out at the steady state minimum and maximum temperature limits declared by the manufacturer for the equipment, to the methods described in IEC 60 068-2-1 [8] Test Ab/Ad and IEC 60 068-2-2 [9] Test Bb/Bd: Dry Heat.

### D.6 Measurement of test environments

The measurement accuracy of the BS test environments defined in Annex D, Test environments shall be.

Pressure:	±5 kPa.
Temperature:	±2 degrees.
Relative Humidity:	±5 %.
DC Voltage:	±1,0 %.
AC Voltage:	±1,5 %.
Vibration:	10 %.
Vibration frequency:	0,1 Hz.

The above values shall apply unless the test environment is otherwise controlled and the specification for the control of the test environment specifies the uncertainty for the parameter.

# Annex E (normative): General rules for statistical testing

<Text will be added.>

### Annex F (normative): Global In-Channel TX-Test

### F.1 General

The global in-channel Tx test enables the measurement of all relevant parameters that describe the in-channel quality of the output signal of the TX under test in a single measurement process.

The parameters describing the in-channel quality of a transmitter, however, are not necessarily independent. The algorithm chosen for description inside this annex places particular emphasis on the exclusion of all interdependencies among the parameters.

### F.2.1 Basic principle

The process is based on the comparison of the actual **output signal of the TX under test**, received by an ideal receiver, with a **reference signal**, that is generated by the measuring equipment and represents an ideal error free received signal. All signals are represented as equivalent (generally complex) baseband signals.

The description below uses numbers and illustrations as examples. These numbers are taken from frame structure 1 with normal CP length and a transmission bandwidth configuration of  $N_{\rm RB} = 100$ . The application of the text below, however, is not restricted to this parameterset.

### F.2.2 Output signal of the TX under test

The output signal of the TX under test is acquired by the measuring equipment and stored for further processing. It is sampled at a sampling rate of 30.72 Msps and it is named z(v). In the time domain it comprises at least 1 frame:: z(v). It is modelled as a signal with the following parameters: demodulated data content, carrier frequency, amplitude and phase for each subcarrier.

### F.2.3 Reference signal

Two types of reference signal are defined:

The reference signal  $i_1(v)$  is constructed by the measuring equipment according to the relevant TX specifications, using the following parameters: demodulated data content, nominal carrier frequency, nominal amplitude and phase for each subcarrier. It is represented as a sequence of samples at a sampling rate of 30.72 Msps in the time domain. The structure of the signal is described in the testmodells.

The reference signal  $i_2(v)$  is constructed by the measuring equipment according to the relevant TX specifications, using the following parameters: restricted data content: nominal Reference Symbols and the Primary Synchronisation Channel, (all other modulation symbols are set to 0 V), nominal carrier frequency, nominal amplitude and phase for each applicable subcarrier, nominal timing. It is represented as a sequence of samples at a sampling rate of 30.72 Msps in the time domain.

### F.2.4 Measurement results

The measurement results, achieved by the global in channel TX test are the following:

- Carrier Frequency error
- EVM (Error Vector Magnitude)
- Resource Element TX power

- RS TX power (RSTP)
- OFDM Symbol TX power (OSTP)

Other side results are: residual amplitude- and phase response of the TX chain after equalisation.

### F.2.5 Measurement points

Resource element TX power is measured after the FFT as described below. EVM is calculated after the Equalizer (Ampl./ Phase correction). The result of the frequency synchronisation is the frequency offset. It is performed in the pre- and/or post-FFT domain. The FFT window of 2048 samples out of 2194 samples (data +CP) in the time domain is selected in the box CP removal.

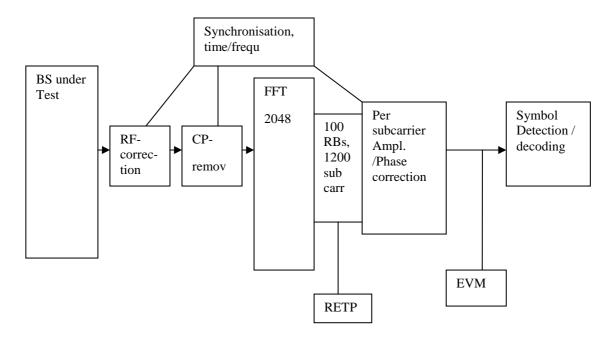


Figure E.2.5-1: Measurement points

### F.3.1 Pre FFT minimization process

**Sample Timing, Carrier Frequency** in z(v) are varied in order to minimise the difference between z(v) and  $i_1(v)$ , after the amplitude ratio of z(v) and  $i_1(v)$  has been scaled. Best fit (minimum difference) is achieved when the RMS difference value between z(v) and i(v) is an absolute minimum.

The carrier frequency variation is the measurement result: Carrier Frequency Error.

From the acquired samples one carrier frequency error can be derived.

Note 1. The minimisation process, to derive the RF error can be supported by Post FFT operations. However the minimisation process defined in the pre FFT domain comprises all acquired samples (i.e. it does not exclude the samples inbetween the FFT widths and it does not exclude the bandwidth outside the transmission bandwidth configuration.

Note 2. The algorithm would allow to derive Carrier Frequency error and Sample Frequency error of the TX under test separately. However there are no requirements for Sample Frequeny error. Hence the algorithm models the RF and the sample frequency commonly (not independently). It returns one error and does not distinuish between both.

After this process the samples z(v) are called  $z^0(v)$ .

### F.3.2 Timing of the FFT window

The FFT window length is 2048 samples per OFDM symbol. 140 FFTs (286720 samples) cover less than the acquired number of samples (30720 samples in 10 subframes) The position in time for FFT must be determined.

In an ideal signal, the FFT may start at any instant within the cyclic prefix without causing an error. The TX filter, however, reduces the window. The EVM requirements shall be met within a window W<CP. There are three different instants for FFT:

Centre of the reduced window, called  $\Delta \tilde{c}$ ,  $\Delta C - W/2$  and  $\Delta C + W/2$ ,

The BS shall transmit a signal according to the Test models, intended for EVM. The primary synchronisation signal and the reference signal shall be used to find the centre of the FFT window.

The timing of the measured signal is determined in the pre FFT domain as follows, using  $z^{0}(v)$  and  $i_{2}(v)$ :

- 1. The measured signal is delay spread by the TX filter. Hence the distinct boarders between the OFDM symbols and between Data and CP are also spread and the timing is not obvious.
- 2. In the Reference Signal  $i_2(v)$  the timing is known.
- 3. Correlation between (1.) and (2.) will result in a correlation peak. The meaning of the correlation peak is approx. the 'impulse response' of the TX filter. The meaning of 'impulse response' assumes that the autocorrelation of the reference signal i<sub>2</sub>(v) is a Dirac peak and that the correlation between the reference signal i<sub>2</sub>(v) and the data in the measured signal is 0. The correlation peak, (the highest, or in case of more than one highest, the earliest) indicates the timing in the measured signal.

The number of samples, used for FFT is reduced compared to  $z^{0}(v)$ . This subset of samples is called z''(v).

From the acquired samples one timing can be derived.

The timing of the centre  $\Delta \tilde{c}$  with respect to the different CP length in a slot is as follows: (Frame structure 1, normal CP length)

 $\Delta \tilde{c}$  is on T<sub>f</sub>=72 within the CP of length 144 (in OFDM symbol 1 to 6)

 $\Delta \tilde{c}$  is on T<sub>f</sub>=88 (=160-72) within the CP of length 160 (in OFDM symbol 0)

#### F.3.3 Resource Element TX power

Perform FFT (z"(v)) with the FFT window timing  $\Delta \tilde{c}$ The result is called Z"(t,f). The RE TX power is then defined as:

$$RETP = |Z'(t, f)|^2 15 KHz$$

From this the Reference Signal Transmit power (RSTP) is derives as follows:

$$RSTP = \frac{1}{n} \sum_{\substack{RS \ RE \ Iocations \\ within \ subframe}} RETP ,$$

It is an average power and accumulates the powers of the reference symbols within a sub frame divided by n, the number of reference symbols within a sub frame.

From RETP the OFDM Symbol TX power (OSTP) is derived as follows:

$$OSTP = \sum_{\substack{all \ N_{RE}^{DL} N_{sc}^{RE} \ RE \ locations \\ of \ 4th \ symbol \ within \ subframe}} \sum_{k} RETP$$

It accumulates all sub carrier powers of the 4th OFDM symbol. The 4th (out of 14 OFDM symbols within a subframe (in case of frame type 1, normal CP length)) contains exclusively PDSCH.

From the acquired samples 10 values for each RSTP and OSTP can be derived.

#### F.3.4 Post FFT equalisation

Perform 140 FFTs on z''(v), one for each OFDM symbol comprising the full frame with the FFT window timing  $\Delta \tilde{c}$ . (in case of frame type 1, normal CP length) The result is an array of samples, 140 in the time axis t times 2048 in the frequency axis f.

The equalizer coefficients  $\tilde{a}(f)$  and  $\tilde{\varphi}(f)$  are determined as follows:

1. Calculate the complex ratios (amplitude and phase) of the post-FFT acquired signal Z'(t, f) and the post-FFT Ideal signal  $I_2(t, f)$ , for each reference symbol, over 10 subframes. This process creates a set of complex ratios:

$$a(t, f).e^{j\varphi(t, f)} = \frac{Z'(t, f)}{I_2(t, f)}$$

2. Perform time averaging at each reference signal subcarrier of the complex ratios, the time-averaging length is 10 subframes. Prior to the averaging of the phases  $\varphi(t_i, f)$  an unwrap operation must be performed according to

the following definition: The unwrap operation corrects the radian phase angles of  $\varphi(t_i, f)$  by adding multiples of 2\*PI when absolute phase jumps between consecutive time instances  $t_i$  are greater then or equal to the jump tolerance of PI radians. This process creates an average amplitude and phase for each reference signal subcarrier (i.e. every third subcarrier with the exception of the reference subcarrier spacing across the DC subcarrier).

$$a(f) = \frac{\sum_{i=1}^{N} a(t_i, f)}{N}$$
$$\varphi(f) = \frac{\sum_{i=1}^{N} \varphi(t_i, f)}{N}$$

Where *N* is the number of reference symbol time-domain locations  $t_i$  from Z"(f,t) for each reference signal subcarrier f.

- 3. The equalizer coefficients for amplitude and phase  $\hat{a}(f)$  and  $\hat{\varphi}(f)$  at the reference signal subcarriers are obtained by computing the moving average in the frequency domain of the time-averaged reference signal subcarriers, i.e. every third subcarrier. The moving average window size is 19. For reference subcarriers at or near the edge of the channel the window size is reduced accordingly as per figure F. 3.4.
- 4. Perform linear interpolation from the equalizer coefficients  $\hat{a}(f)$  and  $\hat{\varphi}(f)$  to compute coefficients  $\tilde{a}(f)$ ,  $\tilde{\varphi}(f)$  for each subcarrier.

The equalized samples are called  $Z''_{eq}(f,t)$ .

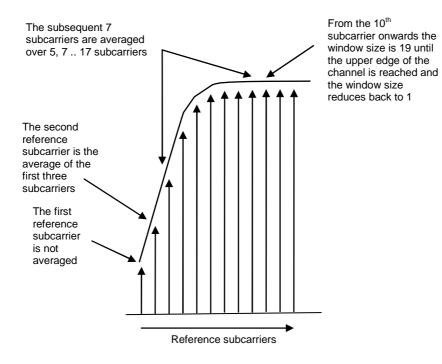


Figure F.3.4-1: Reference subcarrier smoothing in the frequency domain

### F.4.1 EVM

For EVM create two sets of  $Z''_{eq}(f,t)$ , according to the timing ' $\Delta C - W/2$  and  $\Delta C + W/2$ ', using the equalizer coefficients from F.3.4.

The equivalent ideal samples are calculated form  $i_1(v)$  (clause F.2.3) and are called I(f,t).

The EVM is the difference between the ideal waveform and the measured and equalized waveform.

$$EVM = \sqrt{\frac{\sum_{t \in T} \sum_{f \in F(t)} |Z_{eq}'(f, t) - I(f, t)|^2}{\sum_{t \in T} \sum_{f \in F(t)} |I(f, t)|^2}},$$

where

T is the set of symbols with the considered modulation scheme being active within the subframe,

F(t) is the set of subcarriers within the  $N_{\rm SC}^{\rm RB}$  resource blocks with the considered modulation scheme being active in symbol *t*,

I(t, f) is the ideal signal reconstructed by the measurement equipment in accordance with relevant Test models,

 $Z'_{eq}(t, f)$  is the equalized signal under test.

Note1: Although the basic unit of measurement is one subframe, the equalizer is calculated over the entire 10 subframes measurement period to reduce the impact of noise in the reference symbols.

Note 2: Applicability of EVM calculation:

One EVM value is associated to 12 subcarriers times 1 subframe = pair of 2 RBs = 168 resource elements.

But only a reduced number of REs in this pair of 2 RBs contribute to EVM. Those are the PDSCH REs, containing the considered modulation scheme. Only those pairs of 2 RBs are evaluated with respect to EVM, which contain the maximum number of PDSCH REs. (EVM-relevant location in the time/frequency grid) The others are not evaluated.

In specific: For bandwidth 1.4 MHz: Only the pairs of 2 RBs containing 138 PDSCH REs are used for EVM. Only those 138 REs contribute to EVM All pairs of 2 RBs, which contain less than 138 PDSCH REs, are not evaluated with respect to EVM. For all other Bandwidths: Only the pairs of 2 RBs containing 150 PDSCH REs are used for EVM. Only those 150 REs contribute to EVM

All pairs of 2 RBs, which contain less than 150 PDSCH REs, are not evaluated with respect to EVM.

This restriction serves to avoid weighted averaging in F.4.2.

### F.4.2 Averaged EVM

EVM is averaged over all allocated EVM relevant locations in the frequency domain, and 10 consecutive downlink subframes (10 ms):

(The locations in the time-frequency grid are occupied irregularly, see Fig F.4.2-1)

EVM is derived by: square the EVM results F.4.1, sum the squares over all EVM relevant locations in the time/frequency grid, divide the sum by the number of EVM relevant locations, square-root the quotient.


The EVM requirements should be tested against the maximum of the average EVM at the window W extremities of the EVM measurements:

Thus  $\text{EVM}_1$  is calculated using  $\Delta \tilde{t} = \Delta \tilde{t}_l$  in the expressions above and  $\text{EVM}_h$  is calculated using  $\Delta \tilde{t} = \Delta \tilde{t}_h$ . (1 and h, low and high. Where l is the timing  $\Delta C - W/2$  and and high is the timing  $\Delta C + W/2$ )

Thus we get:

 $EVM_{final} = \max(\overline{EVM}_1, \overline{EVM}_h)$ 

For TDD special fields (DwPTS and GP) are not included in the averaging.

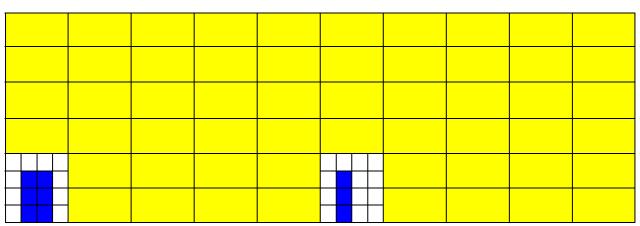

15 RBs

+		_							
						_			 
-									
-									

10 subframes  $\rightarrow$ 

Yellow: 136 EVM-relevant locations in the time/frequency grid

Blue: non PDSCH REs

White: RBs with non-maximum number of PDSCH REs

#### Figure F.4.2-1: Applicability of EVM calculation Example: E-TM1.x, E-TM3.x, 3MHz

#### F.4.2.1 Averaged EVM (TDD)

For TDD the averaging in the time domain can be calculated from subframes of different frames and should have a minimum of 10 subframes averaging length. TDD special fields (DwPTS and GP) are not included in the averaging.

 $EVM_{\text{frame}}$  is derived by: Square the EVM results in a frame. Relevant for EVM are subframes in a frame, which are active in the DL, *Ndl*. Within these subframes, those RBs are relevant, that carry the maximum number of PDSCH REs (same as FDD). Sum the squares, divide the sum by the number of EVM relevant locations, square-root the quotient. (RMS)

The EVM<sub>frame</sub> is calculated, using the maximum of  $\overline{EVM}_{\text{frame}}$  at the window W extremities. Thus  $\overline{EVM}_{\text{frame,l}}$  is calculated using  $\Delta \tilde{t} = \Delta \tilde{t}_{l}$  and  $\overline{EVM}_{\text{frame,h}}$  is calculated using  $\Delta \tilde{t} = \Delta \tilde{t}_{h}$ . (I and h, low and high. Where I is the timing  $\Delta C - W/2$  and and high is the timing  $\Delta C + W/2$ )

$$EVM_{frame} = \max(\overline{EVM}_{frame,l}, \overline{EVM}_{frame,h})$$

In order to unite at least 10 subframes, consider the minimum integer number of radio frames, containing at least 10 EVM relevant subframes. Unite by RMS.

$$\overline{EVM} = \sqrt{\frac{1}{N_{frame}} \sum_{k=1}^{N_{frame}} EVM_{frame,k}^2}, \quad N_{frame} = \left\lceil \frac{10}{N_{dl}} \right\rceil$$

The result, EVM, is compared against the limit.

### Annex G (informative): Test Tolerances and Derivation of Test Requirements

The Test Requirements in this specification have been calculated by relaxing the Minimum Requirements of the core specification using the Test Tolerances defined here. When the Test Tolerance is zero, the Test Requirement will be the same as the Minimum Requirement. When the Test Tolerance is non-zero, the Test Requirements will differ from the Minimum Requirements, and the formula used for this relaxation is given in the following tables.

The Test Tolerances are derived from Test System uncertainties, regulatory requirements and criticality to system performance. As a result, the Test Tolerances may sometimes be set to zero.

The test tolerances should not be modified for any reason e.g. to take account of commonly known test system errors (such as mismatch, cable loss, etc.).

Note that a formula for applying Test Tolerances is provided for all tests, even those with a test tolerance of zero. This is necessary in the case where the Test System uncertainty is greater than that allowed in clause 4.1.2. In this event, the excess error shall be subtracted from the defined test tolerance in order to generate the correct tightened Test Requirements as defined in this Annex.

[FFS: For example, a Test System having 0.9 dB uncertainty for test 6.2 Base Station maximum output power (which is 0.2 dB above the limit specified in clause 4.1.2) would subtract 0.2 dB from the Test Tolerance of 0.7 dB defined in this Annex. This new test tolerance of 0.5 dB would then be applied to the Minimum Requirement using the formula defined in Table G.2-1 to give a new range of  $\pm 2.5$  dB of the manufacturer's rated output power.

Using this same approach for the case where a test had a test tolerance of 0 dB, an excess error of 0.2 dB would result in a modified test tolerance of -0.2 dB.]

# G.1 Measurement of transmitter

Test	Minimum Requirement in TS 36.104	Test Tolerance (TT)	Test Requirement in TS 36.141
6.2 Base station			Formula:
maximum output power			Upper limit + TT, Lower limit - TT
	In normal conditions: within ±2 dB of manufacturer's	Normal and extreme conditions:	In normal conditions: within +2.7 dB and -2.7 dB of the manufacturer's rated output power, f $\leq$ 3.0GHz
	rated output power	0.7 dB, f ≤ 3.0GHz	within +3.0 dB and -3.0 dB of the manufacturer's rated output power, 3.0GHz < f $\leq$ 4.2GHz
	In extreme conditions:	1.0 dB, 3.0GHz < f ≤ 4.2GHz	In extreme conditions: within +3.2 dB and -3.2 dB of the manufacturer's rated output power, $f \le 3.0$ GHz within +3.5 dB and -3.5 dB of the manufacturer's rated
	within ±2.5 dB of manufacturer's rated output power		output power, $3.0$ GHz < f $\leq$ 4.2GHz
6.3.2 Total power dynamic range	Total power	0.4 dB	Formula: Total power dynamic range – TT (dB)
	dynamic range (dB): 1.4 MHz E- UTRA: 7.7 3 MHz E-UTRA: 11.7		1.4 MHz E-UTRA: 7.3 3 MHz E-UTRA: 11.3 5 MHz E-UTRA: 13.5 10 MHz E-UTRA: 16.5 15 MHz E-UTRA: 18.3
	5 MHz E-UTRA: 13.9 10 MHz E-UTRA: 16.9 15 MHz E-UTRA: 18.7 20 MHz E-UTRA: 20		20 MHz E-UTRA: 19.6
6.4.1 Transmitter OFF power	-85dBm/MHz.	2 dB, f ≤ 3.0GHz	Formula: Minimum Requirement + TT
		2.5 dB, 3.0GHz < f ≤ 4.2GHz	
6.4.2 Transmitter transient period	Transmitter transient period : off to on: 17 us on to off: 17 us	N/A	Minimum Requirement
6.5.1 Frequency error	Frequency error limit ±0.05 ppm	12 Hz	Formula: Frequency Error limit + TT 0.05 ppm + 12 Hz
6.5.2 EVM	EVM limit: QPSK: 17.5 % 16QAM: 12.5 % 64QAM: 8 %	1 %	Formula: EVM limit + TT QPSK: 18.5 % 16QAM: 13.5 % 64QAM: 9 %
6.5.3 Time alignment error	Time alignment error within 65 ns	25 ns	Formula: Time alignment error limit + TT 90 ns

6.5.4 DL RS power	DL RS power shall be within ±2.1 dB	0.8 dB, f ≤ 3.0GHz 1.1 dB, 3.0GHz < f ≤ 4.2GHz	Formula: Upper limit + TT Lower limit - TT DL RS power shall be within $\pm 2.9$ dB, f $\leq 3.0$ GHz DL RS power shall be within $\pm 3.2$ dB, $3.0$ GHz < f $\leq 4.2$ GHz
6.6.1 Occupied bandwidth	1.4 MHz 3 MHz 5 MHz 10 MHz 15 MHz 20 MHz	0 kHz	Formula: Minimum Requirement + TT
6.6.2 Adjacent Channel Leakage power Ratio (ACLR)	Paired spectrum ACLR: 45 dB for E-UTRA 45 dB for UTRA Unpaired spectrum ACLR: 45 dB for E-UTRA 45 dB for 1.28 Mcps UTRA 45 dB for 3.84 Mcps UTRA 45 dB for 7.82 Mcps UTRA	0.8 dB 0.8 dB 0.8 dB 0.8 dB 0.8 dB 0.8 dB 0.8 dB	Formula: ACLR Minimum Requirement - TT Absolute limit +TT Paired spectrum ACLR: 44.2 dB 44.2 dB Unpaired spectrum ACLR: 44.2 dB 44.2 dB 44.2 dB 44.2 dB
	CACLR: 45 dB Absolute limit - 13dBm / MHz Absolute limit -15dBm / MHz	0.8 dB 0 dB 0 dB	CACLR: 44.2 dB Absolute limit -13dBm / MHz Absolute limit -15dBm / MHz
6.6.3 Operating band unwanted emissions	$\label{eq:spectral_series} \hline For Wide Area \\ \underline{BS:} \\ \hline \\ \hline \\ \underline{BS:} \\ \hline \\ $	1.5dB 0dB 1.5dB 0dB 1.5dB 0dB	Formula: Minimum Requirement + TT
	<u>Category A,</u> <u>bands &gt; 1GHz</u> For 1.4MHz BW:	1.5dB, f ≤ 3.0GHz	

1		
Offsets < 2.8MHz -1dBm to -11dBm / 100kHz Offsets ≥ 2.8MHz	1.8dB, 3.0GHz < f ≤ 4.2GHz	
-13dBm / 1MHz For 3MHz BW: Offsets < 6MHz -5dBm to -15dBm	0dB 1.5dB, f ≤ 3.0GHz 1.8dB,	
/ 100kHz Offsets ≥ 6MHz -13dBm / 1MHz	3.0GHz < f ≤ 4.2GHz 0dB	
For 5, 10, 15, 20MHz BW: Offsets < 10MHz -7dBm to -14dBm / 100kHz Offsets ≥ 10MHz	1.5dB, f ≤ 3.0GHz 1.8dB, 3.0GHz < f ≤ 4.2GHz	
-13dBm / 1MHz	0dB	
<u>Category B,</u> <u>bands &lt; 1GHz</u> For 1.4MHz BW: Offsets < 2.8MHz -1dBm to -11dBm / 100kHz Offsets ≥ 2.8MHz	1.5dB	
-16dBm / 100kHz For 3MHz BW: Offsets < 6MHz -5dBm to -15dBm / 100kHz Offsets ≥ 6MHz	0dB 1.5dB	
-16dBm / 100kHz For 5, 10, 15, 20MHz BW: Offsets < 10MHz -7dBm to -14dBm / 100kHz Offsets ≥ 10MHz -16dBm / 100kHz	0dB 1.5dB 0dB	
<u>Category B,</u> <u>bands &gt; 1GHz</u> For 1.4MHz BW: Offsets < 2.8MHz -1dBm to -11dBm / 100kHz Offsets ≥ 2.8MHz -15dBm / 1MHz	1.5dB, f ≤ 3.0GHz 1.8dB, 3.0GHz < f ≤ 4.2GHz 0dB	
For 3MHz BW: Offsets < 6MHz -5dBm to -15dBm / 100kHz	1.5dB, f ≤ 3.0GHz 1.8dB, 3.0GHz < f ≤ 4.2GHz	
Offsets ≥ 6MHz -15dBm / 1MHz	0dB	
For 5, 10, 15, 20MHz BW: Offsets < 10MHz -7dBm to -14dBm / 100kHz Offsets ≥ 10MHz	1.5dB, f ≤ 3.0GHz 1.8dB, 3.0GHz < f ≤ 4.2GHz	

	-15dBm / 1MHz	0dB	
		UUB	
	For Home BS:		
	Category A and B: For 1.4MHz BW: Offsets < 2.8MHz -30dBm to - 36dBm / 100kHz Offsets ≥ 2.8MHz -50 dBm to - 32dBm / 1MHz	1.5dB, f ≤ 3.0GHz 1.8dB, 3.0GHz < f ≤ 4.2GHz 0dB	
	For 3MHz BW: Offsets < 6MHz -34dBm to - 40dBm / 100kHz	1.5dB, f ≤ 3.0GHz 1.8dB, 3.0GHz < f	
	Offsets ≥ 6MHz -50dBm to - 32dBm / 1MHz	≤ 4.2GHz 0dB	
	For 5, 10, 15, 20MHz BW: Offsets < 10MHz -36dBm to - 42dBm / 100kHz Offsets ≥ 10MHz -50dBm to - 32dBm / 1MHz	1.5dB, f ≤ 3.0GHz 1.8dB, 3.0GHz < f ≤ 4.2GHz 0dB	
	<u>Additional Reqts,</u> <u>bands &lt; 1GHz</u> All BWs:	0dB	
	<u>Additional Reqts,</u> <u>bands &gt; 1GHz</u> All BWs:	0dB	
	Additional Reqts bands 12,13,14 All BWs: Additional Reqts bands 20 All BWs:	0dB 0dB	
6.6.4.5.1 Transmitter	Category A	0dB	Formula:
spurious emissions, Mandatory Requirements	9 kHz ≤ f < 150 kHz: -13dBm / 1kHz		Minimum Requirement + TT
	150 kHz ≤ f < 30 MHz: -13dBm / 10 kHz		
	30 MHz ≤ f < 1 GHz: -13dBm / 100 kHz		
	1 GHz ≤ f < 12.75 GHz: -13dBm / 1 MHz		
6.6.4.5.2 Transmitter spurious emissions, Mandatory Requirements	<u>Category B</u> 9 kHz ≤ f < 150 kHz: -36dBm / 1 kHz	0dB	Formula: Minimum Requirement + TT
	150 kHz ≤ f < 30 MHz:		

		1	1
	-36dBm / 10 kHz		
	30 MHz ≤ f < 1		
	GHz:		
	-36dBm / 100 kHz		
	1 GHz ≤ f < 12.75 GHz: -36dBm / 1 MHz		
6.6.4.5.3 Transmitter	-96dBm / 100 kHz	0dB	Formula:
spurious emissions, Protection of BS receiver			Minimum Requirement + TT
6.6.4.5.4 Transmitter	Levels from -	0dB	Formula:
spurious emissions,	61dBm to -41dBm	UdB	Minimum Requirement + TT
Additional spurious emissions requirements	Bandwidths from 6.25 kHz to 1MHz		
	See TS 36.104 [2] for details		
6.6.4.5.5 Transmitter spurious emissions,	Levels from - 98dBm to -96dBm	0dB	Formula: Minimum Requirement + TT
Co-location	Bandwidth 100 kHz		
	See TS 36.104 [2] for details		
6.7 Transmitter	Wanted signal	0dB	Formula: Ratio + TT
intermodulation	level - interferer		
(interferer	level = 30dB		Wanted signal level - interferer level = 30 + 0dB
requirements)			
This tolerance applies			
to the stimulus and not			
the measurements			
defined in 6.6.2, 6.6.3			
and 6.6.4.			

# G.2 Measurement of receiver

#### Table G.2-1: Derivation of Test Requirements (Receiver tests)

Test	Minimum Requirement in TS 36.104	Test Tolerance (TT)	Test Requirement in TS 36.141
------	-------------------------------------	---------------------------	-------------------------------

7.2 Reference sensitivity	Reference sensitivity power		Formula: Reference sensitivity power
level	level:		level + TT
	-106.8 dBm for 1.4 MHz BW -103.0 dBm for 3 MHz BW -101.5 dBm for 5 MHz BW -101.5 dBm for 10 MHz BW -101.5 dBm for 15 MHz BW -101.5 dBm for 20 MHz BW	f ≤ 3.0GHz 0.7 dB 0.7 dB 0.7 dB 0.7 dB 0.7 dB 0.7 dB 0.7 dB	f ≤ 3.0GHz -106.1 dBm for 1.4 MHz BW -102.3 dBm for 3 MHz BW -100.8 dBm for 5 MHz BW -100.8 dBm for 10 MHz BW -100.8 dBm for 15 MHz BW -100.8 dBm for 20 MHz BW
		3.0GHz < f ≤ 4.2GHz 1.0 dB	3.0GHz < f ≤ 4.2GHz -105.8 dBm for 1.4 MHz BW -102.0 dBm for 3 MHz BW -100.5 dBm for 5 MHz BW -100.5 dBm for 10 MHz BW -100.5 dBm for 15 MHz BW -100.5 dBm for 20 MHz BW
	T-put limit = 95% of maximum for the Ref Meas channel		T-put limit unchanged
7.3 Dynamic range	Wanted signal power for Wide Area BS:		Formula: Wanted signal power + TT
	-76.3 dBm for 1.4 MHz BW -72.4 dBm for 3 MHz BW -70.2 dBm for 5 MHz BW -70.2 dBm for 10 MHz BW -70.2 dBm for 15 MHz BW -70.2 dBm for 20 MHz BW	0.3 dB 0.3 dB 0.3 dB 0.3 dB 0.3 dB 0.3 dB	-76.0 dBm for 1.4 MHz BW -72.1 dBm for 3 MHz BW -69.9 dBm for 5 MHz BW -69.9 dBm for 10 MHz BW -69.9 dBm for 15 MHz BW -69.9 dBm for 20 MHz BW Interferer signal power unchanged
	Wanted signal power for Home BS:		T-put limit unchanged
	-31.8 dBm for 1.4 MHz BW -27.9 dBm for 3 MHz BW -25.7 dBm for 5 MHz BW -25.7 dBm for 10 MHz BW -25.7 dBm for 15 MHz BW -25.7 dBm for 20 MHz BW		
	T-put limit = 95% of maximum for the Ref Meas channel		
7.4 In-channel selectivity	Wanted signal power:		Formula: Wanted signal power + TT
	-106.9 dBm for 1.4 MHz BW -102.1 dBm for 3 MHz BW -100.0 dBm for 5 MHz BW -98.5 dBm for 10 MHz BW -98.5 dBm for 15 MHz BW -98.5 dBm for 20 MHz BW	f ≤ 3.0GHz 1.4 dB 1.4 dB 1.4 dB 1.4 dB 1.4 dB 1.4 dB 1.4 dB	f ≤ 3.0GHz -105.5 dBm for 1.4 MHz BW -100.7 dBm for 3 MHz BW -98.6 dBm for 5 MHz BW -97.1 dBm for 10 MHz BW -97.1 dBm for 15 MHz BW -97.1 dBm for 20 MHz BW
		3.0GHz < f ≤ 4.2GHz 1.8 dB	3.0GHz < f ≤ 4.2GHz -105.1 dBm for 1.4 MHz BW -100.3 dBm for 3 MHz BW -98.2 dBm for 5 MHz BW -96.7 dBm for 10 MHz BW -96.7 dBm for 15 MHz BW -96.7 dBm for 20 MHz BW
	T-put limit = 95% of maximum for the Ref Meas channel		Interferer signal power unchanged T-put limit unchanged

7.5 Adjacent Channel Selectivity (ACS) and narrow-band blocking	Narrowband blocking: Wanted signal power, all BWs: (PREFSENS + 6 dB)Interferer signal power, all BWs: -49dBmAdjacent channel selectivity: Wanted signal power For 1.4 MHz BW: (PREFSENS + 11dB) 	0 dB	Formula: Wanted signal power + TT <u>Narrowband blocking:</u> all BWs: (P <sub>REFSENS</sub> + 6 dB) Interferer signal power unchanged <u>Adjacent channel selectivity:</u> Wanted signal power For 1.4 MHz BW: (P <sub>REFSENS</sub> + 11dB) For 3 MHz BW: (P <sub>REFSENS</sub> + 8dB) For 5 MHz, 10MHz, 15MHz and 20MHz BW: (P <sub>REFSENS</sub> + 6dB) Interferer signal power unchanged T-put limit unchanged
7.6.5.1 Blocking (General requirements)	In-band blockingWanted signal power, all BWs: (PREFSENS + 6 dB)Interferer signal power, all BWs: -43dBmOut of band blocking Wanted signal power, all BWs: (PREFSENS + 6 dB)Interferer signal power, all BWs: -15dBm CWT-put limit = 95% of maximum for the Ref Meas channel	0 dB	Formula: Wanted signal power + TT, all BWs: (P <sub>REFSENS</sub> + 6 dB) Interferer signal power unchanged T-put limit unchanged
7.6.5.2 Blocking (Co- location with other base stations) 7.7 Receiver spurious	Co-located blocking Wanted signal power, all BWs: (PREFSENS + 6 dB)Interferer signal power, all BWs: +16dBmT-put limit = 95% of maximum for the Ref Meas channel -57dBm / 100 kHz	0 dB	Formula: Wanted signal power + TT, all BWs: (PREFSENS + 6 dB) Interferer signal power unchanged T-put limit unchanged Formula:
emissions	-47dBm / 1 MHz		Minimum Requirement + TT Emission requirements unchanged
7.8 Receiver intermodulation	Wanted signal power, all BWs: (P <sub>REFSENS</sub> + 6dB) CW Interferer power, all BWs: -52 dBm Modulated_Interferer power:, all BWs: -52 dBm T-put limit = 95% of maximum for the Ref Meas channel	0 dB	Formula: Wanted signal power + TT, all BWs: ( P <sub>REFSENS</sub> + 6dB) CW Interferer signal power unchanged Modulated Interferer signal power unchanged T-put limit unchanged

# G.3 Measurement of Performance Requirements

#### Table G.3-1: Derivation of Test Requirements (Performance tests)

Test	Minimum Requirement in TS 36.104	Test Tolerance (TT)	Test Requirement in TS 36.141
8.2.1 Performance requirements of PUSCH in multipath fading propagation conditions transmission on single antenna port	SNRs as specified	0.6dB	Formula: SNR + TT T-put limit unchanged
8.2.1A Performance requirements of PUSCH in multipath fading propagation conditions transmission on two antenna ports	SNRs as specified	0.8dB	Formula: SNR + TT T-put limit unchanged
8.2.2 Performance requirements for UL timing adjustment	SNRs as specified	0.6dB for fading cases 0.3dB for AWGN cases	Formula: SNR + TT T-put limit unchanged
8.2.3 Performance requirements for HARQ- ACK multiplexed on PUSCH	SNRs as specified	0.6dB	Formula: SNR + TT False ACK limit unchanged Correct ACK limit unchanged
8.2.4 Performance requirements for High Speed Train conditions	SNRs as specified	0.3dB	Formula: SNR + TT T-put limit unchanged
8.3.1 ACK missed detection for single user PUCCH format 1a transmission on single antenna port	SNRs as specified	0.6dB	Formula: SNR + TT False ACK limit unchanged Correct ACK limit unchanged
8.3.2 CQI missed detection for PUCCH format 2 transmission on single antenna port	SNRs as specified	0.6dB	Formula: SNR + TT False CQI limit unchanged Correct CQI limit unchanged
8.3.3 ACK missed detection for multi user PUCCH format 1a	SNRs as specified	0.6dB	Formula: SNR + TT False ACK limit unchanged Correct ACK limit unchanged
8.3.4 ACK missed detection for PUCCH format 1b with Channel Selection	SNRs as specified	0.6 dB	Formula: SNR + TT False ACK limit unchanged Correct ACK limit unchanged
8.3.5 ACK missed detection for PUCCH format 3	SNRs as specified	0.6 dB	Formula: SNR + TT False ACK limit unchanged Correct ACK limit unchanged
8.3.6 NACK to ACK detection for PUCCH format 3	SNRs as specified	0.6 dB	Formula: SNR + TT False ACK limit unchanged Correct NACK limit unchanged
8.3.7 ACK missed detection for PUCCH format 1a transmission on two antenna ports	SNRs as specified	0.8dB	Formula: SNR + TT False ACK limit unchanged Correct ACK limit unchanged
8.3.8 CQI performance requirements for PUCCH format 2 transmission on two antenna ports	SNRs as specified	0.8dB	Formula: SNR + TT False ACK limit unchanged Correct ACK limit unchanged

8.3.9 CQI missed	SNRs as specified	0.6 dB for	Formula: SNR + TT
detection for PUCCH format 2 with DTX detection		one antenna port	False CQI limit unchanged Correct CQI limit unchanged
		0.8 dB for	
		two antenna	
		ports	
8.4.1 PRACH false alarm	SNRs as specified	0.6dB for	Formula: SNR + TT
probability and missed detection		fading cases	PRACH False detection limit
detection		0.3dB for	unchanged
		AWGN	PRACH detection limit unchanged
		cases	

# Annex H (Informative): E-UTRAN Measurement Test Cases

<Text will be added.>

## Annex I (Informative): Measurement system set-up

Example of measurement system set-ups are attached below as an informative annex.

### I.1 Transmitter

I.1.1 Base station output power, output power dynamics, transmitted signal quality, Frequency error, EVM, DL RS power, Unwanted emissions

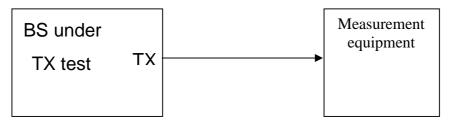


Figure I.1-1: Measuring system Set-up for base station output power, output power dynamics, transmitted signal quality, Frequency error, EVM, DL RS power, Unwanted emissions

### I.1.2 Transmitter intermodulation

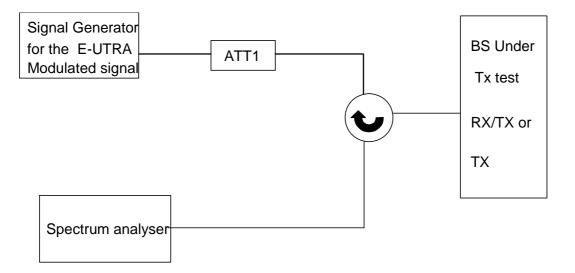


Figure I.1-2: Measuring system Set-up for Transmitter intermodulation

### I.1.3 Time alignment error


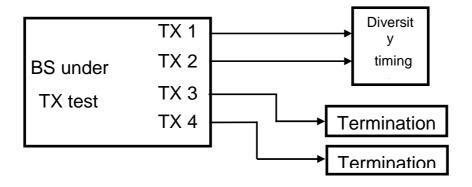


Figure I.1-3: Measuring system Set-up for Test of Time alignment error


### I.1.4 Home BS output power for adjacent channel protection

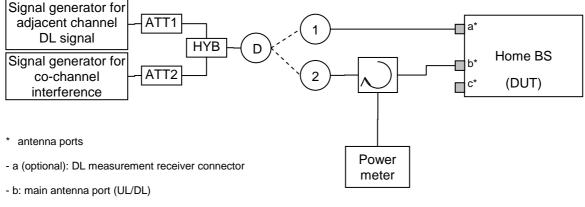

- c (optional): diversity antenna port


Figure I.1-4: Measuring system set-up for Home BS output power for adjacent channel protection

I.1.5 Home BS output power for co-channel E-UTRA protection

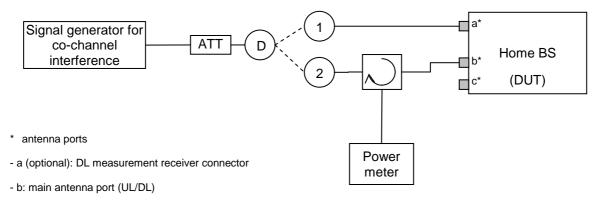

- c (optional): diversity antenna port

Figure I.1-5: (Option 1) Measuring system set-up for Home BS output power for co-channel E-UTRA protection

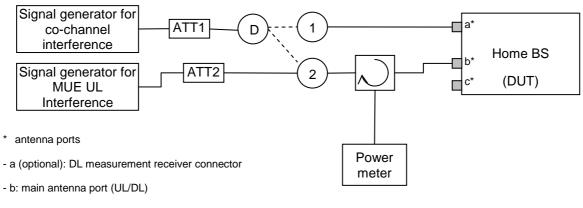


- c (optional): diversity antenna port

Figure I.1-6: (Option 2) Measuring system set-up for Home BS output power for co-channel E-UTRA protection

### I.2 Receiver

NOTE: No HARQ feedback is done for any receiver test in Annex I.2.

### I.2.1 Reference sensitivity level

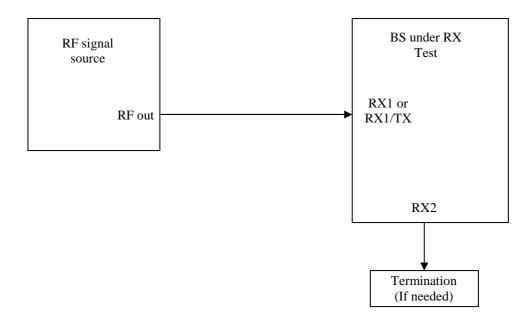

#### Figure I.2-1: Measuring system Set-up for Base Station Reference sensitivity level Test

### I.2.2 Dynamic range

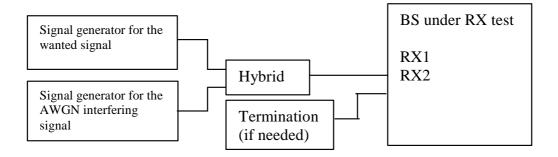


Figure I.2-2: Measuring system Set-up for Dynamic range

### I.2.3 In-channel selectivity

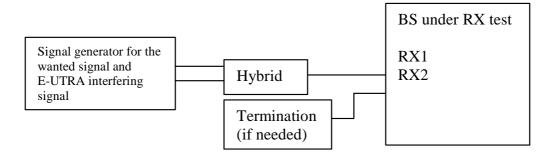


Figure I.2-3: Measuring system Set-up for In-channel selectivity

# I.2.4 Adjacent Channel Selectivity (ACS) and narrowband blocking

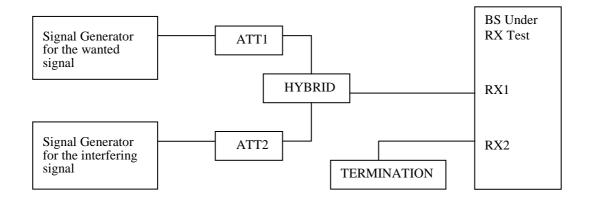


Figure I.2-4: Measuring system Set-up for Adjacent channel selectivity and narrowband blocking

### I.2.5 Blocking characteristics

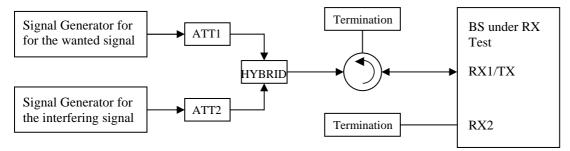


Figure I.2-5: Measuring system Set-up for Blocking characteristics

### I.2.6 Receiver spurious emission

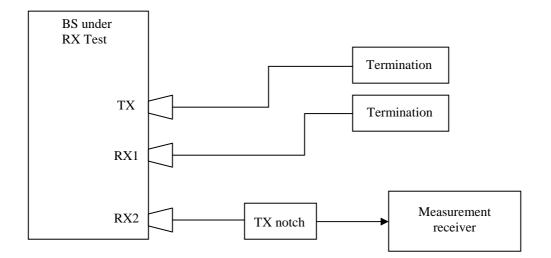


Figure I.2-6: Measuring system Set-up for Receiver spurious emission

### I.2.7 Intermodulation characteristics

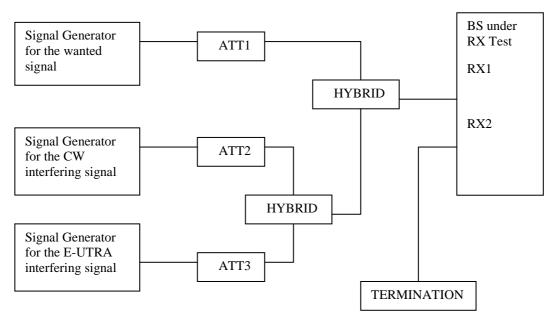


Figure I.2-7: Measuring system Set-up for intermodulation characteristics

### I.3 Performance requirement

### I.3.1 Performance requirements for PRACH in static conditions


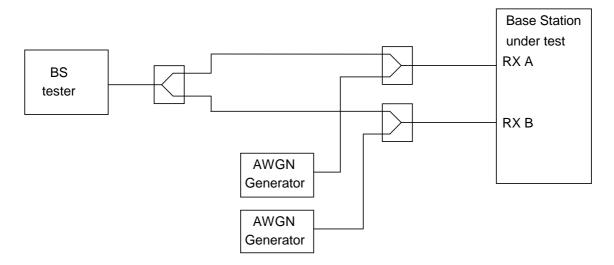


Figure I.3-1: Functional set-up for performance requirements for PRACH in static conditions for BS with Rx diversity (2 Rx case shown)

I.3.2 Performance requirements for PUSCH, PRACH, single user PUCCH in multipath fading conditions and for High Speed Train conditions

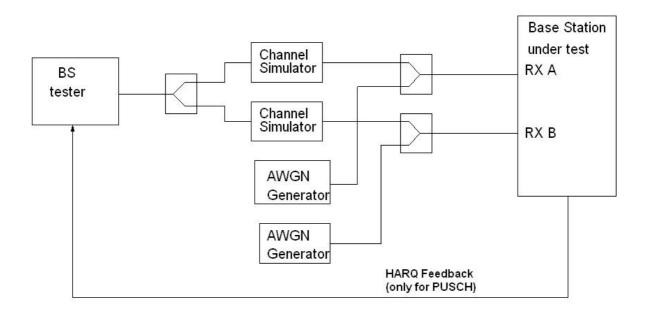

# Figure I.3-2: Functional set-up for performance requirements for PUSCH, PRACH, single user PUCCH in multipath fading conditions and for High Speed Train conditions for BS with Rx diversity (2 Rx case shown)

- NOTE 1: For HST tests which are specified in static conditions, the Channel Simulators are assumed to simulate the Doppler shift.
- NOTE 2: The HARQ Feedback could be done as an RF feedback or as a digital feedback. The HARQ Feedback should be error free.

# I.3.3 Performance requirements for multi user PUCCH in multipath fading conditions


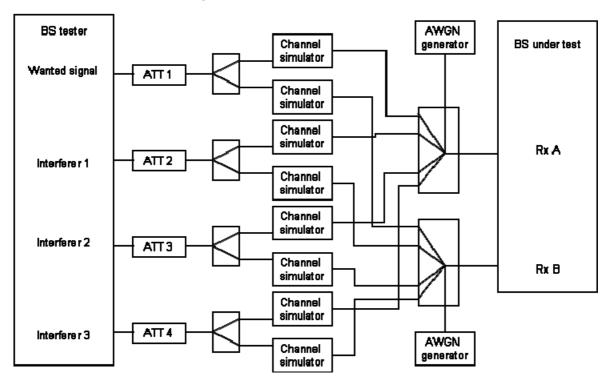


Figure I.3-3: Functional set-up for performance requirements for multi user PUCCH in multipath fading conditions

### I.3.4 Performance requirement for UL timing adjustment

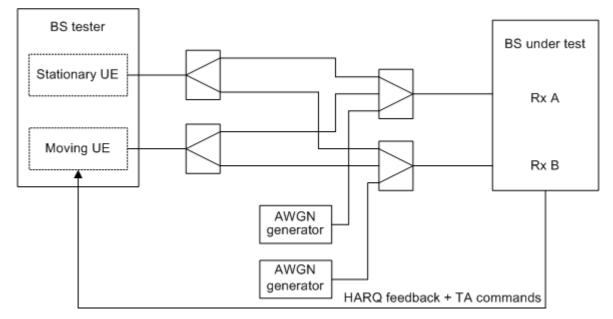

# Figure I.3-4: Functional set-up for performance requirement for UL timing adjustment (Scenario 2 case shown)

- NOTE 1: In case of UL timing adjustment Scenario 1, channel simulators needs to be used for fading and Doppler shift emulation.
- NOTE 2: The HARQ feedback and TA commands could be done as an RF feedback or as a digital feedback. The HARQ feedback and TA commands should be error free.
- I.3.5 Performance requirements for PUCCH transmission on two antenna ports in multipath fading conditions

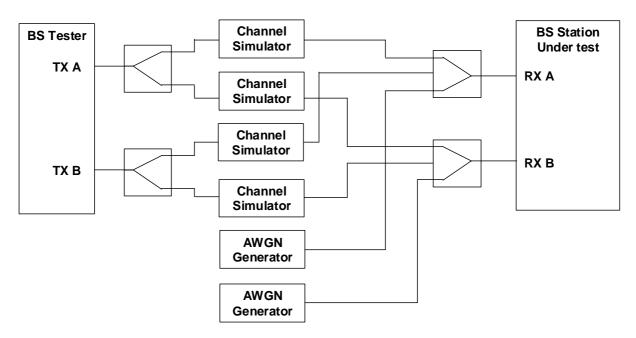


Figure I.3-5: Functional set-up for performance requirements for PUCCH transmission on two antenna ports in multipath fading conditions (2 Rx case shown)

I.3.6 Performance requirements for PUSCH transmission on two antenna ports in multipath fading conditions

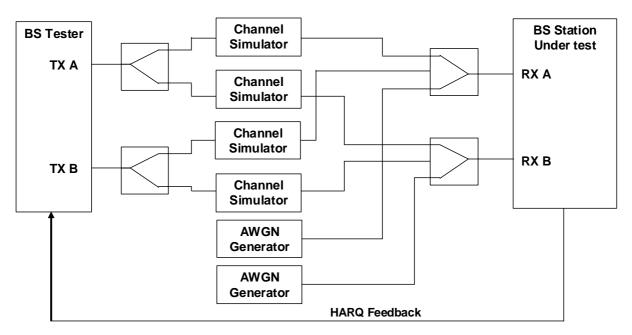


Figure I.3-6: Functional set-up for performance requirements for PUSCH transmission on two antenna ports in multipath fading conditions (2 Rx case shown)

# Annex J (Informative): Unwanted emission requirements for multi-carrier BS

### J.1 General

In section 6.6, unwanted emission requirements for single carrier or multi-carrier BS are specified. This multi-carrier BS corresponds to a multi-carrier BS for E-UTRA, or a BS supporting intra-band contiguous CA. The following two pragmatic scenarios are considered in this annex:

- multi-carrier BS of different E-UTRA channel bandwidths, covering all scenarios except the channel bandwidth of the outermost carrier less than 5 MHz
- multi-carrier BS of E-UTRA and UTRA, covering all scenarios except the channel bandwidth of the outermost carrier less than 5 MHz.

All scenarios for channel bandwidths of the outermost carrier less than 5 MHz are for further study. Only multi-carrier BS with contiguous carriers are considered. The guidelines below assumes that the power spectral density of the multiple carriers is the same. All other combinations of multiple carriers are ffs.

Note 1: Further information and analysis for these scenarios can be found in TR 36.942 [14].

### J.2 Multi-carrier BS of different E-UTRA channel bandwidths

For a multi-carrier E-UTRA BS transmitting a group of carriers of different channel bandwidths, the channel bandwidth of the outermost carriers ( $\geq$ 5 MHz) should be considered for ACLR and Operating band unwanted emission requirements. That is, the corresponding requirements for the channel bandwidth of each of the outermost carriers should be applied at the respective side of the group of transmitted carriers.

## J.3 Multi-carrier BS of E-UTRA and UTRA

For a multi-carrier BS transmitting a group of carriers of E-UTRA and UTRA, the RAT being used on the outermost carriers ( $\geq 5 \ MHz$ ) should be considered for ACLR and Operating band unwanted emission requirements. That is, the corresponding requirements for the RAT being used on each of the outermost carriers should be applied at the respective side of the group of transmitted carriers.

# Annex K (informative): Change history

					Change history		
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New
2007-08	RAN4#44	R4-071503			TS skeleton created from 3GPP TS template.	-	0.0.1
2008-02	RAN4#46	R4-080004			Text proposals for section 2 to 4 (R4-072237) and Annex A (R4-072048), which were agreed at RAN4#45, are incorporated.	0.0,1	0.1.0
2008-02	RAN4#46	R4-080446			Section for In-channel selectivity (new 7.4) is inserted and following sections are re-numbered. Editorial corrections are made in section	0.1,0	0.1.1
					1, 3.2, 4,3, Table 4.3-1, 4.5.2.1, 4.6, 4.6.3, 4.6.4, 4.6.5 and A.2.		
2008-02	RAN4#46	R4-080508			Text proposals in R4-080447, R4-080058, R4-080453, R4- 080047, R4-080048, R4-080049, R4-080050, R4-080051, R4- 080444, R4-080501, R4-080044, R4-080045 and R4-080046 are incorporated with modifications agreed in the first round discussion in RAN4#46 meeting. Overlapped parts in R4-080058 and R4-	0.1.1	0.2.0
2000.02	DANI4#4C	D4 000050			080044 for Annx A, R4-080444 and R4-080501 for section 8 are merged by the editor.	0.0.0	0.0.4
2008-03	RAN4#46 bis	R4-080659			Editorial correction on section 8 is made: Text proposals for section 8 in R4-080444 are removed and the text proposal in R4-080501 is applied. Some editorial corrections are applied.	0.2.0	0.2.1
2008-04	RAN4#46 bis	R4-080828			Text proposals agreed in R4-080583,R4-080617,R4-080663,R4-080664,R4-080666,R4-080584,,R4-080660,R4-080792,R4-080586,R4-080587,R4-080564,R4-080566 and R4-0806007 are incorporated with some editorial modifications.	0.2.1	0.3.0
2008-05	RAN4#47	R4-080844			Text proposals agreed in R4-080803,R4-0799,R4-0800,R4-080801 and R4-080826 are incorporated with editorial modifications.	0.3.0	0.4.0
2008-05	RAN4#47	R4-081198			Text proposals agreed in R4-081055, R4-081007, R4-081070, R4-081170, R4-080924, R4-080888, R4-081176, R4-080853, R4-080854, R4-080855, R4-081056, R4-080889 and R4-081178 are incorporated.	0.4.0	0.5.0
2008-05	RAN#40	RP-080381			Presented for information as V1.0.0.	0.5.0	1.0.0
2008-05	RAN#40	RP-080456			Editorial corrections on the formats in order to comply with the drafting rule of 3GPP.	1.0.0	1.0.1
2008-06	RAN4#47 bis	R4-081255			Correction in section 6.5.1.5, which was incorrectly proposed in R4- 081226, is made. Editorial corrections on 6.5.3.4.1 and 8.4.1.4.2 are made.	1.0.1	1.0.2
2008-06	RAN4#47 bis	R4-081256			Text proposals agreed in R4-081184 and R4-081187 are incorporated.	1.0.2	1.1.0
2008-06	RAN4#47 bis	R4-081329			Editorial corrections in Table 8.4.1.5-2.	1.1.0	1.1.1
2008-08	RAN4#48	R4-081832			Text proposals agreed in the following documents are incorporated: R4-081377, R4-081547, R4-081282, R4-081284, R4-081652, R4- 081502, R4-081283, R4-081650, R4-081268, R4-081269, R4- 081270, R4-081653, R4-081272, R4-081645, R4-081481, R4- 081281, R4-081322.		1.2.0
2008-08	RAN4#48	R4-082185			Text proposals agreed in the following documents are incorporated: R4-081832, R4-082087, R4-082093, R4-081847, R4-081965, R4-081967, R4-081944, R4-081709, 4-082109, R4-081711, R4-081712, R4-082090, R4-081714, R4-081715, R4-081834, R4-082135, R4-082173, R4-082160, R4-082171	1.2.0	1.3.0
2008-09	RAN#41	RP-080715			Typo in Table 8.4.1.5-1 (section 8.4.1.5) , which was brought in at V1.1.0 when implementing R4-081187 is corrected.	1.3.0	2.0.0
2008-09 2008-12	RAN#41 RAN #42	RP-080715 RP-080915	10		Presented for approval as V2.0.0 Correction to the figure with the Transmision Bandwidth configuration	2.0.0 8.0.0	8.0.0 8.1.0
2008-12	RAN #42	RP-080916	14		Modification to EARFCN	8.0.0	8.1.0
2008-12		RP-080919			Introduction of Band 17	8.0.0	8.1.0
2008-12	RAN #42		27		Update of total dynamic range limits	8.0.0	8.1.0
2008-12	RAN #42	RP-080921	28		Update of TDD-FDD coexistance requirements	8.0.0	8.1.0
2008-12	RAN #42	RP-080922	30		PRACH demodulation requirements update	8.0.0	8.1.0
2008-12	RAN #42	RP-090923	4		General corrections in section 7-Annexes	8.0.0	8.1.0
2008-12	RAN #42	RP-080923	12	<u> </u>	General corrections in sections 4-6	8.0.0	8.1.0
2008-12	RAN #42	RP-080923	19	1	Corrections to references, definitions symbols and abbreviations	8.0.0	8.1.0
2008-12	RAN #42		20	1	Corrections to clause 4 and 5	8.0.0	8.1.0
2008-12	RAN #42	RP-080923	21	2	Correction to clause 6	8.0.0	8.1.0
2008-12	RAN #42	RP-080923	22	1	Correction to clause 7	8.0.0	8.1.0
2008-12	RAN #42		23		Correction to clause 8	8.0.0	8.1.0
2008-12	RAN #42		24		Correction to Annex G	8.0.0	8.1.0
2008-12	RAN #42	RP-080924	5	L	Correction of EVM test condition related to total power dynamic	8.0.0	8.1.0

	[		1	1	100000		
2008-12	RAN #42	RP-080924	8		range Addition of BS transmit ON/OFF power tests	8.0.0	8.1.0
	RAN #42	RP-080924	11		Clarification on emission requirements	8.0.0	8.1.0
			32		E-UTRA TDD test models	8.0.0	8.1.0
		RP-080924	17		Correction to transmitter intermodulation test	8.0.0	8.1.0
	RAN #42	RP-080924	26		Correction to E-UTRA test models	8.0.0	8.1.0
	RAN #42	RP-080925	25		EVM averaging for TDD in the global in channel TX test	8.0.0	8.1.0
		RP-080926	1	1	eNB performance test requirement for UL timing adjustment	8.0.0	8.1.0
	RAN #42	RP-080926	2	1	eNB performance test requirement for PUCCH format 2	8.0.0	8.1.0
	RAN #42	RP-080926		1	eNB performance test requirements for Multi User PUCCH	8.0.0	8.1.0
	RAN #42	RP-080926	31		eNB performance requirements for HARQ ACK multiplexed on	8.0.0	8.1.0
			-		PUSCH		
2008-12	RAN #42	RP-080927	9		eNB performance test requirements for High Speed Train conditions	8.0.0	8.1.0
2008-12	RAN #42	RP-080927	15	1	Clarification of eNB HST propagation conditions (36.141, rel-8)	8.0.0	8.1.0
	RAN #42	RP-080927	7	1	Correction of Doppler shift trajectories equations for HST conditions		8.1.0
	RAN #43	RP-090173	54		Clarification of EARFCN for 36.141	8.1.0	8.2.0
		RP-090175	55	1	Regional requirement on maximum rated power for Band 34	8.1.0	8.2.0
	RAN #43	RP-090177	43		Clarification of the BS performance test w.r.t PUCCH ACK/NACK	8.1.0	8.2.0
2000 00			10		Repetition configuration	0.1.0	0.2.0
2009-03	RAN #43	RP-090177	48		PUSCH ACK/NAK simulation assumptions finalization for	8.1.0	8.2.0
0000.00	DANL #40	DD 000477	50		simulations with implementation margins	0.4.0	0.0.0
2009-03	RAN #43	RP-090177	53		HARQ-ACK multiplexed on PUSCH performance requirement results	8.1.0	8.2.0
2009-03	RAN #43	RP-090178	36		Correction of clause 4.	8.1.0	8.2.0
2009-03	RAN #43	RP-090178	39		Correction and update of Annex G.	8.1.0	8.2.0
2009-03	RAN #43	RP-090179	34		Corrections related to E-UTRA test models	8.1.0	8.2.0
2009-03	RAN #43	RP-090179	35		Correction of E-UTRAN TDD eNodeB test models	8.1.0	8.2.0
2009-03	RAN #43	RP-090179	37		Correction and update of clause 6.	8.1.0	8.2.0
2009-03	RAN #43	RP-090179	40		Clarification of PHS band including the future plan	8.1.0	8.2.0
2009-03	RAN #43	RP-090179	45		Correction to transmitter intermodulation test	8.1.0	8.2.0
2009-03	RAN #43	RP-090179	49		Unsynchronized TDD coexistence requirements	8.1.0	8.2.0
	RAN #43	RP-090179	51		Correction to unwanted emission limit for 3MHz(E-UTRA bands <	8.1.0	8.2.0
					1GHz) for Category A		
2009-03	RAN #43	RP-090180	42	1	Correction to BS reciever test requirements	8.1.0	8.2.0
2009-03	RAN #43	RP-090180	56		eNB ACS frequency offset	8.1.0	8.2.0
2009-03	RAN #43	RP-090181	38		Correction of clause 8.	8.1.0	8.2.0
		RP-090181	41		Modifications on parameter settings for some demodulation test cases.	8.1.0	8.2.0
2009-03	RAN #43	RP-090181	44		AWGN level for UL demodulation performance tests	8.1.0	8.2.0
	RAN #44	RP-090544	61		Clarification of requirements for multicarrier BS. (Technically	8.2.0	8.3.0
2000 00			0.		Endorsed CR in R4-50bis - R4-091445)	0.2.0	0.0.0
2009-05	RAN #44	RP-090545	62		Correction of test models for E-UTRAN. (Technically Endorsed CR	8.2.0	8.3.0
0000.05	DANL #44	DD 000545			in R4-50bis - R4-091461)		
		RP-090545			Test system uncertainty for Transmitter intermodulation	8.2.0	8.3.0
		RP-090545	67		Adding test model for transmit ON/OFF test	8.2.0	8.3.0
	RAN #44	RP-090545	68		Correction to DL RS power	8.2.0	8.3.0
	RAN #44	RP-090545	64r1		Addition of missing Test Tolerances for transmitter tests	8.2.0	8.3.0
		RP-090545	70		Test system uncertainty for Receiver dynamic range	8.2.0	8.3.0
2009-05	RAN #44	RP-090545	58		CR 36.141 ACS frequency offset. (Technically Endorsed CR in R4- 50bis - R4-091330)	8.2.0	8.3.0
2009-05	RAN #44	RP-090545	63r2		Test Tolerances for Performance test cases	8.2.0	8.3.0
	RAN #44	RP-090545	59		UL timing adjustment measurement system set-up. (Technically	8.2.0	8.3.0
2000.05			60		Endorsed CR in R4-50bis - R4-091414) UL timing adjustment performance requirement clarifications.	000	0.2.0
2009-05	RAN #44	RP-090545	60		(Technically Endorsed CR in R4-50bis - R4-091438)	8.2.0	8.3.0
	RAN #44	RP-090559	57		Introduction of Extended LTE800 requirements. (Technically Endorsed CR in R4-50bis - R4-091064)	8.3.0	9.0.0
	RAN	RP-090833			Clarification of the multi user PUCCH performance determintion	9.0.0	9.1.0
	#45 DAN		072		(R43-51Cat F Endorsed CR in: R4-092227)	0.0.0	0.4.0
	RAN #45	RP-090833	074		Clarification of the UL timing adjustment performance determination (R43-51Cat F Endorsed CR in: R4-092229)	9.0.0	9.1.0
2009-09	RAN	RP-090833				9.0.0	9.1.0
	#45 RAN	RP-090833	076		Receiver intermodulation clarification	9.0.0	9.1.0
	#45		078		Corrections to E-UTRA Rx requirements		
	RAN #45	RP-090826	079		Correction of spurious emission requirements for LTE800	9.0.0	9.1.0
	RAN	RP-090833	513			9.0.0	9.1.0
	#45		081		Clarifications on testing UL timing adjustment requirements	-	
2009-09	RAN	RP-090833				9.0.0	9.1.0
2009-09		RP-090833 RP-090833	083 092		Correction on reference of extreme power supply LTE operating band unwanted emissions revision	9.0.0	9.1.0 9.1.0

-		1	1			1	
	#45						
2009-12	DD 40	DD 004000	005		Introduction of Extended LTE1500 requirements for TS36.141		0.0.0
2000 40	RP-46	RP-091286	095		(Technically endorsed at RAN 4 52bis in R4-093637)	9.1.0	9.2.0
2009-12	RP-46	DD 001067	000		Clarification of the test method for blocking (Technically endorsed	010	0.2.0
2009-12	KP-40	RP-091267	098		at RAN 4 52bis in R4-093769) Adding missing EARFCN for band 33 and 34 (Technically endorsed	9.1.0	9.2.0
2009-12	RP-46	RP-091267	100		at RAN 4 52bis in R4-093770)	9.1.0	9.2.0
2009-12	KF-40	KF-091207	100		Incorrect FRC A3-2 Coded block size (Technically endorsed at	9.1.0	9.2.0
2009-12	RP-46	RP-091267	102		RAN 4 52bis in R4-093771)	9.1.0	9.2.0
2009-12	111-40	111-031207	102		LTE operating band unwanted emissions correction (Technically	5.1.0	3.2.0
2009-12	RP-46	RP-091266	104		endorsed at RAN 4 52bis in R4-093802)	9.1.0	9.2.0
2009-12	111-40	101-001200	104		HARQ feedback clarification addition (Annex B) (Technically	5.1.0	5.2.0
2003-12	RP-46	RP-091267	106		endorsed at RAN 4 52bis in R4-093997)	9.1.0	9.2.0
2009-12		141 001201	100		Clarification on Spurious emissions limits for BS co-existed with	0.1.0	0.2.0
2003 12	RP-46	RP-091266	108		another BS (Technically endorsed at RAN 4 52bis in R4-094012)	9.1.0	9.2.0
2009-12	1	11 00 200			Corrections to ICS requirement (Technically endorsed at RAN 4	00	0.2.0
2000 12	RP-46	RP-091265	109		52bis in R4-093640)	9.1.0	9.2.0
2009-12	RP-46	RP-091270	111	1	Clarification on PRACH False alarm probability	9.1.0	9.2.0
2009-12	RP-46	RP-091295	112	1	E-UTRA BS classification	9.1.0	9.2.0
2009-12	RP-46	RP-091295	113	1	Home eNode B maximum output power	9.1.0	9.2.0
2009-12	RP-46	RP-091295	114	1	Home eNode B in-channel selectivity requirement	9.1.0	9.2.0
2009-12	RP-46	RP-091295	115	1	Home eNode B receiver intermodulation requirement	9.1.0	9.2.0
2009-12	RP-46	RP-091295 RP-091269	117	1	UL Timing Adjustment test clarifications	9.1.0	9.2.0
2009-12	RP-46		117	-	Multi-path fading propagation conditions reference correction	9.1.0	9.2.0
	17-40	RP-091266	119			9.1.0	9.2.0
2009-12	RP-46	PD 001265	121		Corrections on frequency range of unwanted emissions	010	9.2.0
2000 40		RP-091265	121	4	requirements	9.1.0	
2009-12	RP-46	RP-091266	122	1	Correction to the transmitter intermodulation	9.1.0	9.2.0
2009-12	RP-46	RP-091276	124		Testing in case of Rx diversity, Tx diversity and MIMO	9.1.0	9.2.0
2009-12	RP-46	RP-091295	130	1	Home eNode B ACLR requirement	9.1.0	9.2.0
2009-12	RP-46	RP-091295	131	1	Home eNode B ACS and narrow band blocking requirement	9.1.0	9.2.0
2009-12	RP-46	RP-091295	132	1	Home eNode B Blocking requirement	9.1.0	9.2.0
2009-12	RP-46	RP-091294	133	1	Home eNode B dynamic range requirement	9.1.0	9.2.0
2009-12	RP-46	RP-091294	134	1	Home eNode B frequency error requirement	9.1.0	9.2.0
2009-12	RP-46	RP-091294	135	2	Home eNode B performance requirement	9.1.0	9.2.0
2009-12	RP-46	RP-091294	136	1	Home eNode B operating band unwanted emissions requirement	9.1.0	9.2.0
2009-12	RP-46	RP-091294	137	1	Home eNode B reference sensitivity level requirement	9.1.0	9.2.0
2009-12	RP-46	RP-091294	138	2	Home eNode B spurious emission requirement	9.1.0	9.2.0
2009-12	RP-46	RP-091284	140	2	Inclusion of Band 20 BS Test parameters	9.1.0	9.2.0
2009-12	RP-46	RP-091267	144	1	Applicability of uncertainty for transmitter transient period	9.1.0	9.2.0
2010-03	RP-47	RP-100252	174		Correction of the frequency range for unwanted emmissions limits	9.2.0	9.3.0
					(cat-B/option 2/BW 3MHz)		
2010-03	RP-47	RP-100252	171		Correction of Band 4 and 10 co-existence requirement	9.2.0	9.3.0
2010-03	RP-47	RP-100275	148		Dynamic range requirement for Local Area BS	9.2.0	9.3.0
2010-03	RP-47	RP-100275	149	1	In-channel selectivity for Local Area BS	9.2.0	9.3.0
2010-03	RP-47	RP-100275	150		ACS and narrow band blocking for Local Area BS	9.2.0	9.3.0
2010-03	RP-47	RP-100275	151		Receiver intermodulation for Local Area BS	9.2.0	9.3.0
2010-03	RP-47	RP-100275	152		Performance requirement for Local Area BS	9.2.0	9.3.0
2010-03	RP-47	RP-100275	153		E-UTRA BS classification	9.2.0	9.3.0
2010-03	RP-47	RP-100275	154		Maximum output power for Pico NodeB	9.2.0	9.3.0
2010-03	RP-47	RP-100275	155		Frequency error requirement for Pico NodeB	9.2.0	9.3.0
2010-03	RP-47	RP-100275	156		Reference sensitivity level requirement for Pico NodeB	9.2.0	9.3.0
2010-03	RP-47	RP-100275	158		ACLR requirement for Pico NodeB	9.2.0	9.3.0
2010-03	RP-47	RP-100275	159	<u> </u>	Operating band unwanted emissions requirement for Pico NodeB	9.2.0	9.3.0
2010-03	RP-47	RP-100275	147	1	Spurious emissions requirement for Local Area BS	9.2.0	9.3.0
2010-03	RP-47	RP-100275	147	2	Blocking requirement for Pico NodeB	9.2.0	9.3.0
2010-03	RP-47 RP-47	RP-100275 RP-100263	157	-	Correction of DTT protection requirement	9.2.0	9.3.0
2010-03	RP-47 RP-47	RP-100263 RP-100266	161			9.2.0	
2010-03	INF-4/	11-100200	101		Operating band unwanted emissions requirement for Home eNodeB	9.2.0	9.3.0
2010 02	RP-47	DD 100066	160	1		0.2.0	0.2.0
2010-03		RP-100266	160	1	Dynamic range requirement for Home eNodeB	9.2.0	9.3.0
2010-03	RP-47	RP-100266	162		Corrections of additional spurious emissions and blocking requirements for HeNB	9.2.0	9.3.0
2010-03	RP-47	RP-100266	166		Home BS Output Power Conformance Testing for Adjacent	0.2.0	0.2.0
2010-03	RP-47	RP-100266	100			9.2.0	9.3.0
2010.00	47	DD 400074	175		Channel Protection	0.0.0	0.0.0
2010-03	RP-47	RP-100274	175		Requirements for HARQ-ACK multiplexed on PUSCH for E-UTRA	9.2.0	9.3.0
0040.00	DD (7		470	<u> </u>	LA and Home BS	0.0.0	0.0.0
2010-03	RP-47	RP-100274	176		CQI missed detection requirements for PUCCH format 2 for E-	9.2.0	9.3.0
0040.00	DD 47		405	4	UTRA LA and Home BS	0.0.0	0.0.0
2010-03	RP-47	RP-100274	165	1	Corrections to the receiver intermodulation requirements	9.2.0	9.3.0
2010-06	RP-48	RP-100621	180	<u> </u>	Clarification on narrowband blocking requirements	9.3.0	9.4.0
2010-06	RP-48	RP-100621	470		Spurious emissions limits and blocking requirements for	9.3.0	9.4.0
0040.00	<b>DD</b> (2		178	<u> </u>	coexistence with CDMA850		0.1.0
2010-06	RP-48	RP-100621	183	1	Correction to the FRC for PUSCH 1.4M requirements	9.3.0	9.4.0

2010-06	RP-48	RP-100625	191	1	Clarification of applicability of requirements for multi-carrier BS	9.3.0	9.4.0
2010-06	RP-48	RP-100631	186	·	Co-existence with services in adjacent frequency bands	9.3.0	9.4.0
2010-09	RP-49	RP-100916	193		Clarifications on Base Station transmit and receive configurations	9.4.0	9.5.0
2010-09	RP-49	RP-100920	196		UL Timing Adjustment: Stationary UE propagation channel clarification	9.4.0	9.5.0
2010-09	RP-49	RP-100917	198	1	Modification on testing of time mask of E-UTRA TDD base station in R9	9.4.0	9.5.0
2010-09	RP-49	RP-100916	207		Adding operating unwanted emissions test to tests applicable to Ancillary RF Amplifiers	9.4.0	9.5.0
2010-09	RP-49	RP-100928	194		CR LTE_TDD_2600_US spectrum band definition additions to TS 36.141	9.5.0	10.0.0
2010-12	RP-50	RP-101327	224		Band 12 channel arrangement correction on 36.141		10.1.0
2010-12	RP-50	RP-101328			PUCCH format 2 performance requirements definition clarification		10.1.0
2010-12	RP-50	RP-101328			Correction on multi user PUCCH test		10.1.0
2010-12	RP-50	RP-101342	213		Equaliser coefficient derivation for Global In-Channel TX-Test	10.0.0	
2010-12	RP-50 RP-50	RP-101342 RP-101356	221 211	3	Correction of applicability of requirements CR UMTS/LTE-3500 TDD spectrum band definition additions for	10.0.0	10.1.0
2010-12	KF-30	KF-101330	211	5	BS to TS 36.141	10.0.0	10.1.0
2010-12	RP-50	RP-101362	209	3	Introduction of L-band in TS36.141	10.0.0	10.1.0
2011-04	RP-51	RP-110336		-	Receiver spurious emissions reference correction	10.1.0	
2011-04	RP-51	RP-110337	247	2	Power off test tolerance	10.1.0	10.2.0
2011-04	RP-51		248	1	TS 36.141 subclause 6.5.4: DL RS Power		10.2.0
2011-04	RP-51		251	1	Correction of the test port description for TS 36.141 Rel-10	10.1.0	
2011-04	RP-51	RP-110357		2	Band 42 and 43 co-existence for UMTS/LTE 3500 (TDD) for TS 36.141	10.1.0	10.2.0
2011-04	RP-51	RP-110344	255	-	Operating band unwanted emissions for Band 1, 33 and 34 (TS 36.141)	10.1.0	10.2.0
2011-06	RP-52	RP-110794	261		Modifications to Band 3 to allow LTE Band 3 operation in Japan (Rel-10 TS36.141 CR)	10.2.0	10.3.0
2011-06	RP-52	RP-110807	262		Carrier Aggregation for LTE in TS 36.141 / general requirements	10.2.0	
2011-06	RP-52	RP-110807	264		Carrier Aggregation for LTE in TS 36.141 / receiver requirements	10.2.0	
2011-06	RP-52 RP-52	RP-110802 RP-110796	266 267		Co-existence/co-location between Band 42 and 43 in TS 36.141 Harmonization of co-existence between Home BS and WA BS in	10.2.0	10.3.0 10.3.0
			_		36.141		
2011-06	RP-52 RP-52	RP-110804 RP-110807	258 263	1	Expanded 1900 MHz addition to 36.141	10.2.0	10.3.0
2011-06 2011-06	RP-52 RP-52		265	1	Carrier Aggregation for LTE in TS 36.141 / transmitter requirements Add 2GHz S-Band (Band 23) in 36.141		10.3.0
2011-06	RP-52	RP-110813	205	1	Fixing the misalignment of Band 24 GPS Coexistence	10.2.0	10.3.0
	_			ľ	specifications between 36.104 and 36.141		
2011-09	RP-53	RP-111252	290		Band 3/III operation in Japan		10.4.0
2011-09	RP-53 RP-53	RP-111255 RP-111255	207	1	Uncertainties and Test Tolerances for 3000MHz to 4200MHz Band 42 and 43 for LTE 3500 (TDD) correction to TS 36.141		10.4.0
2011-09	RP-53	RP-111255	292	1	Add Band 22/XXII for LTE/UMTS 3500 (FDD) to TS 36.141		10.4.0
2011-09	RP-53	RP-111260	277	1	Test tolerance for UL-MIMO performance test cases		10.4.0
2011-09	RP-53	RP-111260	278	2	Performance requirements for UL-MIMO	10.3.0	
2011-09	RP-53	RP-111262	282		Specifying acceptable uncertainty of OBW test in CA	10.3.0	10.4.0
2011-09	RP-53	RP-111262	285	1	CR to TS 36.141 Test requirements of Operating Band Unwanted Emissions	10.3.0	10.4.0
2011-09	RP-53	RP-111262	286	2	Correction for TS 36.141	10.3.0	
2011-09	RP-53	RP-111262			Co-existence and co-location corrections in 36.141		10.4.0
2011-09	RP-53	RP-111266		3	TS36.141 CR: on PUSCH tests		10.4.0
2011-09 2011-12	RP-53 RP-54	RP-111266 RP-111684	283 295		CA PUCCH performance requirements for 36.141 Corrections of CA uplink performance test cases in TS36.141	10.3.0	10.4.0 10.5.0
2011-12	RP-54	KF-111004	295		CA PUCCH performance requirements with test tolerance updates	10.4.0	10.5.0
		RP-111691	296		for 36.141	10.4.0	10.5.0
2011-12	RP-54	RP-111734	297		Clarification of general blocking requirements for co-existence in TS 36.141	10.4.0	10.5.0
2011-12	RP-54	RP-111693	298		Home BS Output Power for co-channel E-UTRA protection for 36.141	10.4.0	10.5.0
2011-12	RP-54	RP-111693	300		Update on Home BS Output Power for co-channel E-UTRA protection for 36.141	10.4.0	10.5.0
2011-12	RP-54	RP-111735			Corrections to 3500 MHz	10.4.0	10.5.0
2011-12	RP-54	RP-111686	302	1	TS36.141 CR: on Multi-Antenna channel models	10.4.0	10.5.0
2011-12	RP-54	RP-111690	303		Test procedure clarification for ACK false detection of multi-user PUCCH format 1a	10.4.0	
2011-12	RP-54	RP-111687		3	TX ON or OFF CR 36.141		10.5.0
2011-12	RP-54	RP-111733	305	4	Correction of frequency range for spurious emission requirements		10.5.0
2012-03 2012-03	RP-55 RP-55	RP-120303 RP-120304	309 311	1	Clarification on test procedure for BS In-channel selectivity test Definition of synchronized operation		10.6.0 10.6.0
2012-03	RP-55				Finalizing Home BS Output Power parameters for co-channel E-		
		RP-120205	312	1			
2012-03	RP-55	RP-120295 RP-120298		1	UTRA protection in 36.141 Addition of Band 23 HeNB specifications in 36.141	10.5.0	10.6.0

2012-03	RP-55	RP-120305		_	Introduction of Band 26/XXVI to TS 36.141	10.6.0	
2012-06	RP-56	RP-120788	319	2	Introduction of intra-band non-contiguous operation in TS 36.141	11.0.0	
2012-06	RP-56	RP-120773	320		Introduction of CA band combination Band1 + Band19 to TS 36.104	11.0.0	11.1.0
2012-06	RP-56	RP-120770	323		Editorial corrections in Home BS output power tests	11.0.0	-
2012-06	RP-56	RP-120780	325	1	Editorial corrections in TS 36.141	11.0.0	
2012-06	RP-56	RP-120788	330		Introduction of time alignment error test requirement for intra-band non-contiguous carrier aggregation	11.0.0	11.1.0
2012-06	RP-56	RP-120793	331		Introduction of APAC700(FDD) into TS 36.141	11.0.0	11.1.0
2012-06	RP-56		335		Editorial correction of the TDD eNB test model configuration in TS	11.0.0	11.1.0
2012.06	RP-56	RP-120795 RP-120793	336		36.141 Introduction of Band 44	11.0.0	11 1 0
2012-06	RP-56	RP-120793 RP-120782	330		Time alignment error headline	11.0.0	
2012-06	RP-56	RP-120783	338	1	Time alignment procedure in TS 36.141		-
2012-06	RP-56	KF-120703	341	1	Introduction of CA band combination Band4 + Band13 to TS	11.0.0 11.0.0	
		RP-120773			36.141		
2012-06	RP-56	RP-120773	342		Introduction of CA band combination Band4 + Band17 to TS 36.141	11.0.0	11.1.0
2012-06	RP-56	RP-120792	343	3	Introduction of E850_LB (Band 27) to TS 36.141	11.0.0	11.1.0
2012-06	RP-56	RP-120764	348		Correction of PHS protection requirements for TS 36.141	11.0.0	
2012-09	RP-57	RP-121305	350		Clarification of inter-band CA test configuration generation	11.1.0	11.2.0
2012-09	RP-57	RP-121328	351		Introduction of CA band combination Band2 + Band17 to TS 36.141	11.1.0	11.2.0
2012-09	RP-57	RP-121321	352		Correction to intra-band non-contiguous carrier aggregation bands	11.1.0	11.2.0
2012-09	RP-57	RP-121336	353		acronym Introduction of CA band combination Band1 + Band21 to TS	11.1.0	11.2.0
0040.55	D.D		0- ·		36.141	44.5-	44.5.5
2012-09	RP-57	RP-121327	354	<u> </u>	Introduction of CA_B7_B20 in 36.141	11.1.0	-
2012-09	RP-57	RP-121301	357		Introduction of Japanese regulatory requirements for LTE band 8 in 36.141 R11	11.1.0	11.2.0
2012-09	RP-57	RP-121334	359	1	Add requirements for inter-band CA of B_1-18 in TS36.141	11.1.0	
2012-09	RP-57	RP-121339		1	TS 36.141 CR for CA_7	11.1.0	11.2.0
2012-09	RP-57	RP-121308	361	2	Reusing band 41 requirements for the Japan 2.5G TDD band	11.1.0	
2012-09	RP-57	RP-121330	362	1	Introduction of CA band combination Band3 + Band5 to TS 36.141	11.1.0	11.2.0
2012-09	RP-57	RP-121322	363	1	Intra-band non-contiguous CA BS receiver requirement	11.1.0	
2012-09	RP-57	RP-121300	369		Modificaitions of frequency ranges on spurious emission requirements for Band 6, 18, 19	11.1.0	11.2.0
2012-09	RP-57	RP-121332	370		Introduction of CA band combination Band3 + Band20 to TS 36.141	11.1.0	11.2.0
2012-09	RP-57	RP-121332	372		Introduction of CA band combination Band8 + Band20 to TS 36.104	11.1.0	11.2.0
2012-09	RP-57	RP-121324	373		Introduction of CA B3 B7 in 36.141	11.1.0	11.2.0
2012-12	RP-58	RP-121885	374		Introduction of CA band combination Band3 + Band8 to TS 36.141	11.2.0	
2012-12	RP-58	RP-121891	375		Introduction of CA band combination Band4 + Band5 to TS 36.141	11.2.0	11.3.0
2012-12	RP-58	RP-121897	376		Introduction of CA band combination Band5 + Band17 to TS 36.141	11.2.0	
2012-12	RP-58	RP-121855	381	<u> </u>	Modification of ouput power requirement for LA E-UTRA BS	11.2.0	11.3.0
2012-12	RP-58	RP-121000	384	1	Modification on E-UTRA BS transmitter requirements	11.2.0	
2012-12	RP-58	RP-121867	385	Ľ.	Clean up of specification R11	11.2.0	
2012-12	RP-58	RP-121867	388		Cleanup of 36.141 performance	11.2.0	
2012-12	RP-58	RP-121900	389		Implementing NC CA in all LTE Power Classes	11.2.0	
2012-12	RP-58	RP-121895	390		Introduction of CA_B5_B12 in 36.141	11.2.0	
2012-12	RP-58	RP-121911	391		Correcting missing figure and subclause numbering in TS 36.141	11.2.0	
2012-12	RP-58	RP-121900	393		Correction to intra-band non-contiguous carrier aggregation bands acronym	11.2.0	
2012-12	RP-58	RP-121853	395		CR to add the rated ouput power for 8 Tx antennas	11.2.0	11.3.0
2012-12	RP-58	RP-121867	398		Correction to test requirements of operating band unwanted	11.2.0	
2012-12	RP-58	RP-121900	400		emissions Further corrections for NC CA in LTE LA BS	11.2.0	11 2 0
	RP-56 RP-58	RP-121900 RP-121907	400	1	CR for TS 36.141 transmitter characteristics (Clause 6) due to	11.2.0	
2012-12	1				introduction of Medium Range BS Introduction of inter-band CA_4-12 into TS 36.141		
		DD 101000	100			11.2.0	
2012-12	RP-58	RP-121888	402		Introduction of inter-band CA 11 19 into TS 26 141	11 2 0	
2012-12 2012-12 2012-12 2012-12	RP-58 RP-58 RP-58	RP-121888 RP-121883 RP-121907	402 403 404		Introduction of inter-band CA_11-18 into TS 36.141 Introduction of new BS classes to E-UTRA test specification	11.2.0 11.2.0	
2012-12 2012-12 2012-12	RP-58 RP-58	RP-121883 RP-121907	403 404	1	Introduction of new BS classes to E-UTRA test specification (performance part)	11.2.0	11.3.0
2012-12 2012-12 2012-12 2012-12	RP-58	RP-121883 RP-121907 RP-121907	403	1	Introduction of new BS classes to E-UTRA test specification (performance part) E-UTRA MR BS receiver requirement	11.2.0 11.2.0	11.3.0 11.3.0
2012-12	RP-58 RP-58 RP-58	RP-121883 RP-121907	403 404 405	1	Introduction of new BS classes to E-UTRA test specification (performance part) E-UTRA MR BS receiver requirement Introduction of medium range BS class to TS 36.141 (clause 1-5) Allowing two antenna ports configuration in TAE test procedure for	11.2.0 11.2.0 11.2.0	11.3.0 11.3.0
2012-12 2012-12 2012-12 2012-12 2012-12 2012-12	RP-58 RP-58 RP-58 RP-58	RP-121883 RP-121907 RP-121907 RP-121907	403 404 405 407	1	Introduction of new BS classes to E-UTRA test specification (performance part) E-UTRA MR BS receiver requirement Introduction of medium range BS class to TS 36.141 (clause 1-5) Allowing two antenna ports configuration in TAE test procedure for MIMO and Tx diversity Replace TBD with final requirements for PUCCH format 2 with DTX	11.2.0 11.2.0 11.2.0 11.2.0	11.3.0 11.3.0 11.3.0
2012-12 2012-12 2012-12 2012-12 2012-12 2012-12 2012-12	RP-58 RP-58 RP-58 RP-58 RP-58	RP-121883           RP-121907           RP-121907           RP-121907           RP-121901	403 404 405 407 408	1	Introduction of new BS classes to E-UTRA test specification (performance part) E-UTRA MR BS receiver requirement Introduction of medium range BS class to TS 36.141 (clause 1-5) Allowing two antenna ports configuration in TAE test procedure for MIMO and Tx diversity	11.2.0 11.2.0 11.2.0 11.2.0	11.3.0 11.3.0 11.3.0 11.3.0 11.3.0

2012-12	RP-58	RP-121867	415		Clarification of BS RF channels to be tested for ACLR	11.2.0	11.3.0
2012-12	RP-58	RP-121911	416	1	Correction of BS test configuration table	-	11.3.0
2012-12	RP-58	RP-121893	417		Introduction of inter-band CA_4-7 into TS 36.141		11.3.0
2012-12	RP-58	RP-121902	418		Introduction of Band 29		11.3.0
2013-03	RP-59	RP-130306		1	TS 36.141 CR for CA_38		11.4.0
2013-03	RP-59	RP-130366	038 8	2	Cleanup of 36.141 performance.	11.3.0	11.4.0
2013-03	RP-59	RP-130266	421		Correction of BS performance conformance tests	11.3.0	11.4.0
2013-03	RP-59	RP-130274	424	1	Correction of UEM requirements in TS 36.141		11.4.0
2013-03	RP-59	RP-130274	425		Correction to MSR BS classes conformance test requirements		11.4.0
2013-03	RP-59	RP-130274	426		Correction to LTE BS classes performance requirements		11.4.0
2013-03	RP-59	RP-130284	428	1	Alignment of terminology for intra-band non-contiguous CA requirement	11.3.0	11.4.0
2013-03	RP-59	RP-130268	430		Correction to test requirements for PUSCH with 20 MHz channel bandwidth	11.3.0	11.4.0
2013-03	RP-59	RP-130287	431	1	Band 41 requirements for operation in Japan	11.3.0	11.4.0
2013-03	RP-59	RP-130284	432	1	Further corrections for non-contiguous spectrum operation in TS36.141		11.4.0
2013-06	RP-60	RP-130769	433		Add the receiver requirements test procedure for Medium Range BS in TS36.141	11.4.0	11.5.0
2013-06	RP-60	RP-130770	434		Clarifications on transmitter spurious emission test in TS36.141	11.4.0	11.5.0
2013-06	RP-60	RP-130770	435		Further correct some mistakes for non-contiguous spectrum operation in TS36.141	11.4.0	11.5.0
2013-06	RP-60	RP-130766	441		CR on TAE for inter-band CA	11.4.0	11.5.0
2013-06	RP-60	RP-130767	442	1	Editorial correction of inter band CA table to TS 36.141		11.5.0
2013-06	RP-60	RP-130770	443		Addidtion of Bands for intra-band non-contiguous CA for 36.141	11.4.0	11.5.0
2013-06	RP-60	RP-130770	444		Clarification on non-contiguous spectrum operation test configuration	11.4.0	11.5.0
2013-06	RP-60	RP-130769	446		Modification on co-location spurious emission requirement for Medium Range BS	11.4.0	11.5.0
2013-06	RP-60	RP-130769	447	1	Modification on co-location blocking requirement for E-UTRA Medium Range BS	11.4.0	11.5.0
2013-06	RP-60	RP-130765	454		CR for UL-MIMO conformance test	11.4.0	11.5.0
09-2013	RP-61	RP-131282	460		Editorial correction for the UL-MIMO channel model	11.5.0	11.6.0
09-2013	RP-61	RP-131280	464		Add the Receiver Blocking test procedure for Home BS to TS36.141	11.5.0	11.6.0
10-2013					Correction of the change history table	11.6.0	11.6.1
12-2013	RP-62	RP-131939	486		Correction to PUSCH test requirement		11.7.0
12-2013	RP-62	RP-131931	501		Consideration on CA OBW requirement	11.6.1	11.7.0
12-2013	RP-62	RP-131930	507		Clarification for CACLR in TS36.141	11.6.1	11.7.0
03-2014	RP-63	RP-140375	522		Correction of abbreviations for negative acknowledgement		11.8.0
03-2014	RP-63	RP-140375	512	1	Corrections in TS 36.141		11.8.0
03-2014	RP-63	RP-140372	517	1	Introduction of multi-band BS testing to TS 36.141 (Clauses 1 - 5)	11.7.0	
03-2014	RP-63	RP-140372	519	1	Introduction of test requirements for multi-band operation with conformance test improvement for multi-carrier testing (36.141, section 6 and 7)	11.7.0	11.8.0
06-2014	RP-64	RP-140913	524	1	Multi-band corrections in 36.141 chapter 6		11.9.0
06-2014	RP-64	RP-140913		1	Multi-band corrections in 36.141 chapter 7		11.9.0
06-2014	RP-64	RP-140913	535		Corrections of multi-band BS testing to TS 36.141 (Clauses 1 - 5)		11.9.0
06-2014	RP-64		597		Correction on manufacturer's declaration in TS36.141		11.9.0
06-2014	RP-64	RP-140913		1	Clarification on definitions and ACLR requirement in TS36.141		11.9.0
06-2014	RP-64	RP-140914	537	1	Band 29 correction	11.8.0	11.9.0

# History

Document history		
V11.2.0	November 2012	Publication
V11.3.0	February 2013	Publication
V11.4.0	April 2013	Publication
V11.5.0	July 2013	Publication
V11.6.1	October 2013	Publication
V11.7.0	January 2014	Publication
V11.8.0	April 2014	Publication
V11.9.0	July 2014	Publication