



**LTE;  
Evolved Universal Terrestrial Radio Access (E-UTRA);  
Physical channels and modulation  
(3GPP TS 36.211 version 19.1.0 Release 19)**



---

**Reference**RTS/TSGR-0136211vj10

---

---

**Keywords**LTE

---

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

---

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

---

**Important notice**

The present document can be downloaded from the  
[ETSI Search & Browse Standards](#) application.

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver](#) repository.

Users should be aware that the present document may be revised or have its status changed,  
this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to  
the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our  
[Coordinated Vulnerability Disclosure \(CVD\)](#) program.

---

**Notice of disclaimer & limitation of liability**

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

---

**Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2025.  
All rights reserved.

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the [ETSI IPR online database](#).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Legal Notice

This Technical Specification (TS) has been produced by the ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found at [3GPP to ETSI numbering cross-referencing](#).

---

# Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

# Contents

|                                                                       |    |
|-----------------------------------------------------------------------|----|
| Intellectual Property Rights .....                                    | 2  |
| Legal Notice .....                                                    | 2  |
| Modal verbs terminology.....                                          | 2  |
| Foreword.....                                                         | 9  |
| 1 Scope .....                                                         | 10 |
| 2 References .....                                                    | 10 |
| 3 Symbols and abbreviations.....                                      | 11 |
| 3.1 Symbols.....                                                      | 11 |
| 3.2 Abbreviations .....                                               | 15 |
| 4 Frame structure.....                                                | 15 |
| 4.1 Frame structure type 1 for FDD .....                              | 16 |
| 4.2 Frame structure type 2 .....                                      | 17 |
| 4.3 Frame structure type 3 .....                                      | 18 |
| 4.4 Frame structure type 1 for IoT NTN TDD .....                      | 19 |
| 5 Uplink.....                                                         | 20 |
| 5.1 Overview .....                                                    | 20 |
| 5.1.1 Physical channels.....                                          | 20 |
| 5.1.2 Physical signals.....                                           | 20 |
| 5.2 Slot structure and physical resources.....                        | 20 |
| 5.2.1 Resource grid.....                                              | 20 |
| 5.2.2 Resource elements .....                                         | 22 |
| 5.2.3 Resource blocks .....                                           | 22 |
| 5.2.4 Narrowbands and widebands .....                                 | 22 |
| 5.2.5 Guard period for narrowband and wideband retuning .....         | 23 |
| 5.3 Physical uplink shared channel .....                              | 25 |
| 5.3.1 Scrambling.....                                                 | 25 |
| 5.3.2 Modulation.....                                                 | 26 |
| 5.3.2A Layer mapping.....                                             | 27 |
| 5.3.2A.1 Layer mapping for transmission on a single antenna port..... | 27 |
| 5.3.2A.2 Layer mapping for spatial multiplexing .....                 | 27 |
| 5.3.3 Transform precoding.....                                        | 28 |
| 5.3.3A Precoding .....                                                | 28 |
| 5.3.3A.1 Precoding for transmission on a single antenna port.....     | 28 |
| 5.3.3A.2 Precoding for spatial multiplexing .....                     | 28 |
| 5.3.4 Mapping to physical resources.....                              | 30 |
| 5.4 Physical uplink control channel.....                              | 36 |
| 5.4.1 PUCCH formats 1, 1a and 1b .....                                | 37 |
| 5.4.2 PUCCH formats 2, 2a and 2b .....                                | 40 |
| 5.4.2A PUCCH format 3 .....                                           | 41 |
| 5.4.2B PUCCH format 4 .....                                           | 43 |
| 5.4.2C PUCCH format 5 .....                                           | 43 |
| 5.4.3 Mapping to physical resources.....                              | 44 |
| 5.4A Short Physical Uplink Control Channel .....                      | 47 |
| 5.4A.1 General.....                                                   | 47 |
| 5.4A.2 SPUCCH formats 1,1a,1b.....                                    | 47 |
| 5.4A.2.1 Slot-SPUCCH .....                                            | 47 |
| 5.4A.2.2 Subslot-SPUCCH.....                                          | 48 |
| 5.4A.3 SPUCCH format 3 .....                                          | 49 |
| 5.4A.3.1 Slot-SPUCCH .....                                            | 49 |
| 5.4A.4 SPUCCH format 4 .....                                          | 49 |
| 5.4A.4.1 Slot-SPUCCH .....                                            | 49 |
| 5.4A.4.2 Subslot-SPUCCH.....                                          | 50 |
| 5.4A.5 Mapping to physical resources.....                             | 50 |

|            |                                                                                   |     |
|------------|-----------------------------------------------------------------------------------|-----|
| 5.5        | Reference signals.....                                                            | 53  |
| 5.5.1      | Generation of the reference signal sequence.....                                  | 53  |
| 5.5.1.1    | Base sequences of length $3N_{sc}^{RB}$ or larger.....                            | 54  |
| 5.5.1.2    | Base sequences of length less than $3N_{sc}^{RB}$ .....                           | 55  |
| 5.5.1.3    | Group hopping .....                                                               | 58  |
| 5.5.1.4    | Sequence hopping .....                                                            | 59  |
| 5.5.1.5    | Determining virtual cell identity for sequence generation .....                   | 59  |
| 5.5.2      | Demodulation reference signal .....                                               | 60  |
| 5.5.2.1    | Demodulation reference signal for PUSCH .....                                     | 60  |
| 5.5.2.1.1  | Reference signal sequence.....                                                    | 60  |
| 5.5.2.1.2  | Mapping to physical resources .....                                               | 64  |
| 5.5.2.1A   | Demodulation reference signal for PUSCH with sub-PRB allocations.....             | 65  |
| 5.5.2.1A.1 | Reference signal sequence using modulation schemes other than $\pi/2$ -BPSK ..... | 65  |
| 5.5.2.1A.2 | Reference signal sequence using $\pi/2$ -BPSK modulation scheme.....              | 66  |
| 5.5.2.1A.3 | Group hopping.....                                                                | 67  |
| 5.5.2.1A.4 | Mapping to physical resources .....                                               | 67  |
| 5.5.2.2    | Demodulation reference signal for PUCCH.....                                      | 68  |
| 5.5.2.2.1  | Reference signal sequence.....                                                    | 68  |
| 5.5.2.2.2  | Mapping to physical resources .....                                               | 70  |
| 5.5.2.3    | Demodulation reference signal for SPUCCH.....                                     | 70  |
| 5.5.2.3.1  | Reference signal sequence.....                                                    | 70  |
| 5.5.2.3.2  | Mapping to physical resources .....                                               | 71  |
| 5.5.3      | Sounding reference signal.....                                                    | 73  |
| 5.5.3.1    | Sequence generation.....                                                          | 73  |
| 5.5.3.1.1  | Sequence generation for basic SRS .....                                           | 73  |
| 5.5.3.1.2  | Sequence generation for additional SRS .....                                      | 73  |
| 5.5.3.2    | Mapping to physical resources .....                                               | 74  |
| 5.5.3.2.1  | Mapping to physical resources for basic SRS .....                                 | 74  |
| 5.5.3.2.2  | Mapping to physical resources for additional SRS.....                             | 76  |
| 5.5.3.3    | Sounding reference signal subframe configuration .....                            | 77  |
| 5.6        | SC-FDMA baseband signal generation .....                                          | 79  |
| 5.6A       | SC-FDMA baseband signal generation for PUSCH using sub-PRB allocations.....       | 80  |
| 5.6A.1     | Modulation schemes other than $\pi/2$ -BPSK.....                                  | 80  |
| 5.6A.2     | Modulation scheme $\pi/2$ -BPSK .....                                             | 80  |
| 5.7        | Physical random access channel.....                                               | 81  |
| 5.7.1      | Time and frequency structure .....                                                | 81  |
| 5.7.2      | Preamble sequence generation.....                                                 | 88  |
| 5.7.3      | Baseband signal generation.....                                                   | 92  |
| 5.8        | Modulation and upconversion .....                                                 | 94  |
| 6          | Downlink.....                                                                     | 95  |
| 6.1        | Overview .....                                                                    | 95  |
| 6.1.1      | Physical channels.....                                                            | 95  |
| 6.1.2      | Physical signals.....                                                             | 95  |
| 6.2        | Slot structure and physical resource elements .....                               | 96  |
| 6.2.1      | Resource grid.....                                                                | 96  |
| 6.2.2      | Resource elements .....                                                           | 97  |
| 6.2.3      | Resource blocks .....                                                             | 98  |
| 6.2.3.1    | Virtual resource blocks of localized type .....                                   | 99  |
| 6.2.3.2    | Virtual resource blocks of distributed type .....                                 | 99  |
| 6.2.4      | Resource-element groups (REGs).....                                               | 100 |
| 6.2.4A     | Enhanced Resource-Element Groups (EREGs).....                                     | 101 |
| 6.2.4B     | Short Resource-Element Groups (SREGs) .....                                       | 101 |
| 6.2.5      | Guard period for half-duplex FDD operation .....                                  | 101 |
| 6.2.6      | Guard Period for TDD Operation .....                                              | 102 |
| 6.2.7      | Narrowbands and widebands .....                                                   | 102 |
| 6.2.8      | Guard period for narrowband and wideband retuning .....                           | 103 |
| 6.3        | General structure for downlink physical channels.....                             | 103 |
| 6.3.1      | Scrambling.....                                                                   | 104 |
| 6.3.2      | Modulation.....                                                                   | 105 |
| 6.3.3      | Layer mapping.....                                                                | 105 |
| 6.3.3.1    | Layer mapping for transmission on a single antenna port.....                      | 105 |

|           |                                                                                                   |     |
|-----------|---------------------------------------------------------------------------------------------------|-----|
| 6.3.3.2   | Layer mapping for spatial multiplexing .....                                                      | 106 |
| 6.3.3.3   | Layer mapping for transmit diversity .....                                                        | 107 |
| 6.3.4     | Precoding .....                                                                                   | 107 |
| 6.3.4.1   | Precoding for transmission on a single antenna port .....                                         | 107 |
| 6.3.4.2   | Precoding for spatial multiplexing using antenna ports with cell-specific reference signals ..... | 108 |
| 6.3.4.2.1 | Precoding without CDD .....                                                                       | 108 |
| 6.3.4.2.2 | Precoding for large delay CDD .....                                                               | 108 |
| 6.3.4.2.3 | Codebook for precoding and CSI reporting .....                                                    | 109 |
| 6.3.4.3   | Precoding for transmit diversity .....                                                            | 110 |
| 6.3.4.4   | Precoding for spatial multiplexing using antenna ports with UE-specific reference signals .....   | 111 |
| 6.3.5     | Mapping to resource elements .....                                                                | 112 |
| 6.4       | Physical downlink shared channel .....                                                            | 113 |
| 6.4.1     | Physical downlink shared channel for BL/CE UEs .....                                              | 115 |
| 6.4.2     | Slot/subslot-based physical downlink shared channel .....                                         | 118 |
| 6.5       | Physical multicast channel .....                                                                  | 120 |
| 6.5.1     | Cyclic shift for PMCH .....                                                                       | 120 |
| 6.5.2     | Frequency-domain interleaving .....                                                               | 121 |
| 6.6       | Physical broadcast channel .....                                                                  | 122 |
| 6.6.1     | Scrambling .....                                                                                  | 122 |
| 6.6.2     | Modulation .....                                                                                  | 122 |
| 6.6.3     | Layer mapping and precoding .....                                                                 | 123 |
| 6.6.4     | Mapping to resource elements .....                                                                | 123 |
| 6.6.4.1   | PBCH repetition in the cell acquisition subframe .....                                            | 124 |
| 6.7       | Physical control format indicator channel .....                                                   | 125 |
| 6.7.1     | Scrambling .....                                                                                  | 125 |
| 6.7.2     | Modulation .....                                                                                  | 125 |
| 6.7.3     | Layer mapping and precoding .....                                                                 | 126 |
| 6.7.4     | Mapping to resource elements .....                                                                | 126 |
| 6.8       | Physical downlink control channel .....                                                           | 126 |
| 6.8.1     | PDCCH formats .....                                                                               | 126 |
| 6.8.2     | PDCCH multiplexing and scrambling .....                                                           | 126 |
| 6.8.3     | Modulation .....                                                                                  | 127 |
| 6.8.4     | Layer mapping and precoding .....                                                                 | 127 |
| 6.8.5     | Mapping to resource elements .....                                                                | 127 |
| 6.8A      | Enhanced physical downlink control channel .....                                                  | 128 |
| 6.8A.1    | EPDCCH formats .....                                                                              | 129 |
| 6.8A.2    | Scrambling .....                                                                                  | 130 |
| 6.8A.3    | Modulation .....                                                                                  | 130 |
| 6.8A.4    | Layer mapping and precoding .....                                                                 | 130 |
| 6.8A.5    | Mapping to resource elements .....                                                                | 131 |
| 6.8B      | MTC physical downlink control channel .....                                                       | 132 |
| 6.8B.1    | MPDCCH formats .....                                                                              | 132 |
| 6.8B.2    | Scrambling .....                                                                                  | 133 |
| 6.8B.3    | Modulation .....                                                                                  | 133 |
| 6.8B.4    | Layer mapping and precoding .....                                                                 | 133 |
| 6.8B.5    | Mapping to resource elements .....                                                                | 133 |
| 6.8C      | Short physical downlink control channel (SPDCCH) .....                                            | 137 |
| 6.8C.1    | SPDCCH formats .....                                                                              | 137 |
| 6.8C.2    | Scrambling .....                                                                                  | 139 |
| 6.8C.3    | Modulation .....                                                                                  | 139 |
| 6.8C.4    | Layer mapping and precoding .....                                                                 | 139 |
| 6.8C.5    | Mapping to resource elements .....                                                                | 139 |
| 6.9       | Physical hybrid ARQ indicator channel .....                                                       | 141 |
| 6.9.1     | Modulation .....                                                                                  | 142 |
| 6.9.2     | Resource group alignment, layer mapping and precoding .....                                       | 142 |
| 6.9.3     | Mapping to resource elements .....                                                                | 144 |
| 6.10      | Reference signals .....                                                                           | 146 |
| 6.10.1    | Cell-specific Reference Signal (CRS) .....                                                        | 146 |
| 6.10.1.1  | Sequence generation .....                                                                         | 146 |
| 6.10.1.2  | Mapping to resource elements .....                                                                | 147 |
| 6.10.2    | MBSFN reference signals .....                                                                     | 149 |
| 6.10.2.1  | Sequence generation .....                                                                         | 149 |

|            |                                                                                |     |
|------------|--------------------------------------------------------------------------------|-----|
| 6.10.2.1.1 | Sequence generation for 15 kHz and 7.5 kHz subcarrier spacing .....            | 149 |
| 6.10.2.1.2 | Sequence generation for 1.25 kHz subcarrier spacing.....                       | 150 |
| 6.10.2.1.3 | Sequence generation for 2.5 kHz subcarrier spacing.....                        | 150 |
| 6.10.2.1.4 | Sequence generation for 0.37 kHz subcarrier spacing.....                       | 150 |
| 6.10.2.2   | Mapping to resource elements.....                                              | 150 |
| 6.10.2.2.1 | Mapping to resource elements for 15 kHz and 7.5 kHz subcarrier spacing .....   | 150 |
| 6.10.2.2.2 | Mapping to resource elements for 1.25 kHz.....                                 | 152 |
| 6.10.2.2.3 | Mapping to resource elements for 2.5 kHz subcarrier spacing.....               | 152 |
| 6.10.2.2.4 | Mapping to resource elements for 0.37 kHz subcarrier spacing.....              | 153 |
| 6.10.3     | UE-specific reference signals associated with PDSCH .....                      | 153 |
| 6.10.3.1   | Sequence generation.....                                                       | 154 |
| 6.10.3.2   | Mapping to resource elements.....                                              | 155 |
| 6.10.3A    | Demodulation reference signals associated with EPDCCH, MPDCCH, or SPDCCH ..... | 162 |
| 6.10.3A.1  | Sequence generation.....                                                       | 163 |
| 6.10.3A.2  | Mapping to resource elements.....                                              | 164 |
| 6.10.4     | Positioning reference signals .....                                            | 166 |
| 6.10.4.1   | Sequence generation.....                                                       | 166 |
| 6.10.4.2   | Mapping to resource elements.....                                              | 166 |
| 6.10.4.3   | Positioning reference signal subframe configuration .....                      | 169 |
| 6.10.5     | CSI reference signals .....                                                    | 169 |
| 6.10.5.1   | Sequence generation.....                                                       | 170 |
| 6.10.5.2   | Mapping to resource elements.....                                              | 170 |
| 6.10.5.3   | CSI reference signal subframe configuration .....                              | 179 |
| 6.11       | Synchronization signals.....                                                   | 179 |
| 6.11.1     | Primary synchronization signal (PSS) .....                                     | 179 |
| 6.11.1.1   | Sequence generation.....                                                       | 179 |
| 6.11.1.2   | Mapping to resource elements.....                                              | 180 |
| 6.11.2     | Secondary synchronization signal (SSS) .....                                   | 180 |
| 6.11.2.1   | Sequence generation.....                                                       | 181 |
| 6.11.2.2   | Mapping to resource elements.....                                              | 182 |
| 6.11.3     | Resynchronization signal (RSS) .....                                           | 183 |
| 6.11.3.1   | Sequence generation.....                                                       | 183 |
| 6.11.3.2   | Mapping to resource elements.....                                              | 183 |
| 6.11A      | Discovery signal .....                                                         | 184 |
| 6.11B      | MTC wake-up signal (MWUS).....                                                 | 185 |
| 6.11B.1    | Sequence generation .....                                                      | 185 |
| 6.11B.2    | Mapping to resource elements .....                                             | 185 |
| 6.12       | OFDM baseband signal generation .....                                          | 186 |
| 6.13       | Modulation and upconversion .....                                              | 186 |
| 7          | Generic functions .....                                                        | 188 |
| 7.1        | Modulation mapper .....                                                        | 188 |
| 7.1.1      | BPSK .....                                                                     | 188 |
| 7.1.2      | QPSK .....                                                                     | 188 |
| 7.1.3      | 16QAM .....                                                                    | 188 |
| 7.1.4      | 64QAM .....                                                                    | 189 |
| 7.1.5      | 256QAM .....                                                                   | 191 |
| 7.1.6      | 1024QAM .....                                                                  | 192 |
| 7.2        | Pseudo-random sequence generation.....                                         | 192 |
| 8          | Timing .....                                                                   | 192 |
| 8.1        | Uplink-downlink frame timing.....                                              | 193 |
| 9          | Sidelink.....                                                                  | 195 |
| 9.1        | Overview .....                                                                 | 195 |
| 9.1.1      | Physical channels.....                                                         | 195 |
| 9.1.2      | Physical signals.....                                                          | 195 |
| 9.1.3      | Handling of simultaneous sidelink and uplink/downlink transmissions .....      | 195 |
| 9.2        | Slot structure and physical resources.....                                     | 196 |
| 9.2.1      | Resource grid.....                                                             | 196 |
| 9.2.2      | Resource elements .....                                                        | 196 |
| 9.2.3      | Resource blocks .....                                                          | 197 |
| 9.2.4      | Resource pool .....                                                            | 197 |

|          |                                                 |     |
|----------|-------------------------------------------------|-----|
| 9.2.5    | Guard period .....                              | 197 |
| 9.3      | Physical Sidelink Shared Channel .....          | 197 |
| 9.3.1    | Scrambling .....                                | 197 |
| 9.3.2    | Modulation .....                                | 198 |
| 9.3.3    | Layer mapping .....                             | 198 |
| 9.3.4    | Transform precoding .....                       | 198 |
| 9.3.5    | Precoding .....                                 | 198 |
| 9.3.6    | Mapping to physical resources .....             | 198 |
| 9.4      | Physical Sidelink Control Channel .....         | 199 |
| 9.4.1    | Scrambling .....                                | 199 |
| 9.4.2    | Modulation .....                                | 199 |
| 9.4.3    | Layer mapping .....                             | 199 |
| 9.4.4    | Transform precoding .....                       | 199 |
| 9.4.5    | Precoding .....                                 | 199 |
| 9.4.6    | Mapping to physical resources .....             | 199 |
| 9.5      | Physical Sidelink Discovery Channel .....       | 200 |
| 9.5.1    | Scrambling .....                                | 200 |
| 9.5.2    | Modulation .....                                | 200 |
| 9.5.3    | Layer mapping .....                             | 200 |
| 9.5.4    | Transform precoding .....                       | 200 |
| 9.5.5    | Precoding .....                                 | 200 |
| 9.5.6    | Mapping to physical resources .....             | 200 |
| 9.6      | Physical Sidelink Broadcast Channel .....       | 201 |
| 9.6.1    | Scrambling .....                                | 201 |
| 9.6.2    | Modulation .....                                | 201 |
| 9.6.3    | Layer mapping .....                             | 201 |
| 9.6.4    | Transform precoding .....                       | 201 |
| 9.6.5    | Precoding .....                                 | 201 |
| 9.6.6    | Mapping to physical resources .....             | 201 |
| 9.7      | Sidelink Synchronization Signals .....          | 201 |
| 9.7.1    | Primary sidelink synchronization signal .....   | 202 |
| 9.7.1.1  | Sequence generation .....                       | 202 |
| 9.7.1.2  | Mapping to resource elements .....              | 202 |
| 9.7.2    | Secondary sidelink synchronization signal ..... | 202 |
| 9.7.2.1  | Sequence generation .....                       | 202 |
| 9.7.2.2  | Mapping to resource elements .....              | 202 |
| 9.8      | Demodulation reference signals .....            | 202 |
| 9.9      | SC-FDMA baseband signal generation .....        | 204 |
| 9.10     | Timing .....                                    | 204 |
| 10       | Narrowband IoT .....                            | 205 |
| 10.0     | General .....                                   | 205 |
| 10.0.1   | Frame structure .....                           | 205 |
| 10.0.1.1 | Frame structure type 1 .....                    | 205 |
| 10.0.1.2 | Frame structure type 2 .....                    | 205 |
| 10.1     | Uplink .....                                    | 206 |
| 10.1.1   | Overview .....                                  | 206 |
| 10.1.1.1 | Physical channels .....                         | 206 |
| 10.1.1.2 | Physical signals .....                          | 206 |
| 10.1.2   | Slot structure and physical resources .....     | 206 |
| 10.1.2.1 | Resource grid .....                             | 206 |
| 10.1.2.2 | Resource elements .....                         | 207 |
| 10.1.2.3 | Resource unit .....                             | 207 |
| 10.1.3   | Narrowband physical uplink shared channel ..... | 208 |
| 10.1.3.1 | Scrambling .....                                | 208 |
| 10.1.3.2 | Modulation .....                                | 208 |
| 10.1.3.3 | Layer mapping .....                             | 209 |
| 10.1.3.4 | Transform precoding .....                       | 209 |
| 10.1.3.5 | Precoding .....                                 | 209 |
| 10.1.3.6 | Mapping to physical resources .....             | 209 |
| 10.1.4   | Demodulation reference signal .....             | 211 |
| 10.1.4.1 | Reference signal sequence .....                 | 211 |

|                               |                                                         |            |
|-------------------------------|---------------------------------------------------------|------------|
| 10.1.4.1.1                    | Reference signal sequence for $N_{sc}^{RU} = 1$ .....   | 211        |
| 10.1.4.1.2                    | Reference signal sequence for $N_{sc}^{RU} > 1$ .....   | 213        |
| 10.1.4.1.3                    | Group hopping.....                                      | 214        |
| 10.1.4.2                      | Mapping to physical resources.....                      | 215        |
| 10.1.5                        | SC-FDMA baseband signal generation.....                 | 215        |
| 10.1.6                        | Narrowband physical random-access channel .....         | 216        |
| 10.1.6.1                      | Time and frequency structure.....                       | 216        |
| 10.1.6.2                      | Baseband signal generation.....                         | 220        |
| 10.1.7                        | Modulation and upconversion.....                        | 220        |
| 10.2                          | Downlink.....                                           | 220        |
| 10.2.1                        | Overview .....                                          | 220        |
| 10.2.1.1                      | Physical channels .....                                 | 220        |
| 10.2.1.2                      | Physical signals .....                                  | 221        |
| 10.2.2                        | Slot structure and physical resource elements .....     | 221        |
| 10.2.2.1                      | Resource grid .....                                     | 221        |
| 10.2.2.2                      | Resource elements.....                                  | 221        |
| 10.2.2.3                      | Guard period for half-duplex FDD operation.....         | 221        |
| 10.2.2.4                      | Guard period for TDD operation.....                     | 221        |
| 10.2.3                        | Narrowband physical downlink shared channel .....       | 221        |
| 10.2.3.1                      | Scrambling .....                                        | 221        |
| 10.2.3.2                      | Modulation.....                                         | 222        |
| 10.2.3.3                      | Layer mapping and precoding.....                        | 222        |
| 10.2.3.4                      | Mapping to resource elements.....                       | 222        |
| 10.2.4                        | Narrowband physical broadcast channel.....              | 224        |
| 10.2.4.1                      | Scrambling .....                                        | 224        |
| 10.2.4.2                      | Modulation.....                                         | 224        |
| 10.2.4.3                      | Layer mapping and precoding.....                        | 224        |
| 10.2.4.4                      | Mapping to resource elements.....                       | 224        |
| 10.2.5                        | Narrowband physical downlink control channel.....       | 225        |
| 10.2.5.1                      | NPDCCH formats .....                                    | 225        |
| 10.2.5.2                      | Scrambling .....                                        | 225        |
| 10.2.5.3                      | Modulation.....                                         | 225        |
| 10.2.5.4                      | Layer mapping and precoding.....                        | 225        |
| 10.2.5.5                      | Mapping to resource elements.....                       | 225        |
| 10.2.6                        | Narrowband reference signal (NRS).....                  | 227        |
| 10.2.6.1                      | Sequence generation.....                                | 230        |
| 10.2.6.2                      | Mapping to resource elements.....                       | 230        |
| 10.2.6A                       | Narrowband positioning reference signal (NPRS).....     | 231        |
| 10.2.6A.1                     | Sequence generation.....                                | 232        |
| 10.2.6A.2                     | Mapping to resource elements.....                       | 232        |
| 10.2.6A.3                     | NPRS subframe configuration .....                       | 233        |
| 10.2.6B                       | Narrowband wake up signal (NWUS).....                   | 234        |
| 10.2.6B.1                     | Sequence generation.....                                | 234        |
| 10.2.6B.2                     | Mapping to resource elements.....                       | 234        |
| 10.2.7                        | Synchronization signals .....                           | 235        |
| 10.2.7.1                      | Narrowband primary synchronization signal (NPSS) .....  | 235        |
| 10.2.7.1.1                    | Sequence generation .....                               | 235        |
| 10.2.7.1.2                    | Mapping to resource elements .....                      | 235        |
| 10.2.7.2                      | Narrowband secondary synchronization signal (NSSS)..... | 236        |
| 10.2.7.2.1                    | Sequence generation .....                               | 236        |
| 10.2.7.2.2                    | Mapping to resource elements .....                      | 236        |
| 10.2.8                        | OFDM baseband signal generation.....                    | 237        |
| 10.2.9                        | Modulation and upconversion.....                        | 238        |
| <b>Annex A (informative):</b> | <b>Change history .....</b>                             | <b>239</b> |
| History .....                 |                                                         | 250        |

---

# Foreword

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

---

# 1 Scope

The present document describes the physical channels for evolved UTRA.

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] TS 36.201: "Evolved Universal Terrestrial Radio Access (E-UTRA); LTE physical layer; General description".
- [3] TS 36.212: "Evolved Universal Terrestrial Radio Access (E-UTRA); Multiplexing and channel coding".
- [4] TS 36.213: "Evolved Universal Terrestrial Radio Access (E-UTRA); Physical layer procedures".
- [5] TS 36.214: "Evolved Universal Terrestrial Radio Access (E-UTRA); Physical layer; Measurements".
- [6] TS 36.104: "Evolved Universal Terrestrial Radio Access (E-UTRA); Base Station (BS) radio transmission and reception".
- [7] TS 36.101: "Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) radio transmission and reception".
- [8] TS 36.321, "Evolved Universal Terrestrial Radio Access (E-UTRA); Medium Access Control (MAC) protocol specification".
- [9] TS 36.331, "Evolved Universal Terrestrial Radio Access (E-UTRA); Radio Resource Control (RRC) Protocol specification"
- [10] TS 36.304, "Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) procedures in idle mode"
- [11] TS 37.213: "Physical layer procedures for shared spectrum channel access"
- [12] TS 36.300: "Evolved Universal Terrestrial Radio Access (E-UTRA) and Evolved Universal Terrestrial Radio Access Network (E-UTRAN); Overall description; Stage 2"

## 3 Symbols and abbreviations

### 3.1 Symbols

For the purposes of the present document, the following symbols apply:

|                                        |                                                                                                                     |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| $(k, l)$                               | Resource element with frequency-domain index $k$ and time-domain index $l$                                          |
| $a_{k,l}^{(p)}$                        | Value of resource element $(k, l)$ [for antenna port $p$ ]                                                          |
| $D$                                    | Matrix for supporting cyclic delay diversity                                                                        |
| $D_{\text{RA}}$                        | Density of random access opportunities per radio frame                                                              |
| $f_0$                                  | Carrier frequency                                                                                                   |
| $f_{\text{RA}}$                        | PRACH resource frequency index within the considered time-domain location                                           |
| $f_{\text{PRB,hop}}^{\text{PRACH}}$    | PRACH frequency hopping offset, expressed as a number of resource blocks                                            |
| $l_{\text{NPDCCHstart}}$               | Start symbol in slot 0 for NPDCCH                                                                                   |
| $l_{\text{NPDSCHstart}}$               | Start symbol in slot 0 for NPDSCH                                                                                   |
| $M_{\text{sc}}^{\text{PSBCH}}$         | Bandwidth for PSBCH transmission, expressed as a number of subcarriers                                              |
| $M_{\text{RB}}^{\text{PSBCH}}$         | Bandwidth for PSBCH transmission, expressed as a number of resource blocks                                          |
| $M_{\text{sc}}^{\text{PSCCH}}$         | Bandwidth for PSCCH transmission, expressed as a number of subcarriers                                              |
| $M_{\text{RB}}^{\text{PSCCH}}$         | Bandwidth for PSCCH transmission, expressed as a number of resource blocks                                          |
| $M_{\text{sc}}^{\text{PSDCH}}$         | Bandwidth for PSDCH transmission, expressed as a number of subcarriers                                              |
| $M_{\text{RB}}^{\text{PSDCH}}$         | Bandwidth for PSDCH transmission, expressed as a number of resource blocks                                          |
| $M_{\text{sc}}^{\text{PSSCH}}$         | Scheduled bandwidth for PSSCH transmission, expressed as a number of subcarriers                                    |
| $M_{\text{RB}}^{\text{PSSCH}}$         | Scheduled bandwidth for PSSCH transmission, expressed as a number of resource blocks                                |
| $M_{\text{sc}}^{\text{PUSCH}}$         | Scheduled bandwidth for uplink transmission, expressed as a number of subcarriers                                   |
| $M_{\text{RB}}^{\text{PUSCH}}$         | Scheduled bandwidth for uplink transmission, expressed as a number of resource blocks                               |
| $M_{\text{rep}}^{\text{NPUSCH}}$       | Scheduled number of repetitions of a NPUSCH transmission                                                            |
| $M_{\text{rep}}^{\text{NPDSCH}}$       | Scheduled number of repetitions of a NPDSCH transmission                                                            |
| $M_{\text{sc}}^{\text{NPUSCH}}$        | Scheduled bandwidth for uplink NPUSCH transmission, expressed as a number of subcarriers                            |
| $M_{\text{identical}}^{\text{NPUSCH}}$ | Number of repetitions of identical slots for NPUSCH                                                                 |
| $M_{\text{bit}}^{(q)}$                 | Number of coded bits to transmit on a physical channel [for codeword $q$ ]                                          |
| $M_{\text{symb}}^{(q)}$                | Number of modulation symbols to transmit on a physical channel [for codeword $q$ ]                                  |
| $M_{\text{symb}}^{\text{layer}}$       | Number of modulation symbols to transmit per layer for a physical channel                                           |
| $M_{\text{symb}}^{\text{ap}}$          | Number of modulation symbols to transmit per antenna port for a physical channel                                    |
| $M_{\text{sc}}^{\text{RU}}$            | Number of consecutive subcarriers in an UL resource unit for PUSCH sub-PRB allocation                               |
| $M_{\text{slots}}^{\text{UL}}$         | Number of slots in an UL resource unit for PUSCH sub-PRB allocation                                                 |
| $M_{\text{symb}}^{\text{UL}}$          | Number of SC-FDMA symbols in an uplink slot for PUSCH sub-PRB allocation                                            |
|                                        | Number of subcarriers in the frequency domain for PUSCH sub-PRB allocation                                          |
| $M_{\text{seq}}^{\text{RU}}$           | Number of reference signal sequences available for the UL resource unit size for PUSCH sub-PRB allocation           |
| $M_{\text{RU}}$                        | Number of scheduled UL resource units for PUSCH sub-PRB allocation                                                  |
| $N$                                    | A constant equal to 2048 for $\Delta f = 15$ kHz , 4096 for $\Delta f = 7.5$ kHz and 8192 for $\Delta f = 3.75$ kHz |
| $N_{\text{CP},l}$                      | Downlink cyclic prefix length for OFDM symbol $l$ in a slot                                                         |
| $N_{\text{CS}}$                        | Cyclic shift value used for random access preamble generation                                                       |

|                       |                                                                                                                                                                                   |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $N_{cs}^{(1)}$        | Number of cyclic shifts used for PUCCH formats 1/1a/1b in a resource block with a mix of formats 1/1a/1b and 2/2a/2b                                                              |
| $N_{RB}^{(2)}$        | Bandwidth available for use by PUCCH formats 2/2a/2b, expressed in multiples of $N_{sc}^{RB}$                                                                                     |
| $N_{RB}^{HO}$         | The offset used for PUSCH frequency hopping, expressed in number of resource blocks (set by higher layers)                                                                        |
| $N_{ID}^{cell}$       | Physical layer cell identity                                                                                                                                                      |
| $N_{ID}^{Ncell}$      | Narrowband physical layer cell identity                                                                                                                                           |
| $N_{ID}^{MBSFN}$      | MBSFN area identity                                                                                                                                                               |
| $N_{ID}^{SL}$         | Physical layer sidelink synchronization identity                                                                                                                                  |
| $N_{ID}^{PRS}$        | Positioning reference signal identity                                                                                                                                             |
| $N_{RB}^{DL}$         | Downlink bandwidth configuration, expressed in multiples of $N_{sc}^{RB}$                                                                                                         |
| $N_{RB}^{min, DL}$    | Smallest downlink bandwidth configuration, expressed in multiples of $N_{sc}^{RB}$                                                                                                |
| $N_{RB}^{max, DL}$    | Largest downlink bandwidth configuration, expressed in multiples of $N_{sc}^{RB}$                                                                                                 |
| $N_{RB}^{UL}$         | Uplink bandwidth configuration, expressed in multiples of $N_{sc}^{RB}$                                                                                                           |
| $N_{RB}^{min, UL}$    | Smallest uplink bandwidth configuration, expressed in multiples of $N_{sc}^{RB}$                                                                                                  |
| $N_{RB}^{max, UL}$    | Largest uplink bandwidth configuration, expressed in multiples of $N_{sc}^{RB}$                                                                                                   |
| $N_{RB}^{SL}$         | Sidelink bandwidth configuration, expressed in multiples of $N_{sc}^{RB}$                                                                                                         |
| $N_{RSS}$             | Duration of RSS measured in subframes                                                                                                                                             |
| $N_{SF}$              | Number of scheduled subframes for NPDSCH transmission                                                                                                                             |
| $N_{symb}^{NPSS}$     | Number of symbols for NPSS in a subframe                                                                                                                                          |
| $N_{symb}^{NSSS}$     | Number of symbols for NSSS in a subframe                                                                                                                                          |
| $N_{sc}^{RU}$         | Number of consecutive subcarriers in an UL resource unit for NB-IoT                                                                                                               |
| $N_{seq}^{RU}$        | Number of reference signal sequences available for the UL resource unit size                                                                                                      |
| $N_{RU}$              | Number of scheduled UL resource units for NB-IoT                                                                                                                                  |
| $N_{NB}^{UL}$         | Total number of uplink narrowbands                                                                                                                                                |
| $N_{WB}^{UL}$         | Total number of uplink widebands                                                                                                                                                  |
| $N_{sc}^{UL}$         | Number of subcarriers in the frequency domain for NB-IoT                                                                                                                          |
| $N_{acc}$             | Number of consecutive absolute subframes over which the scrambling sequence stays the same                                                                                        |
| $N_{abs}^{PUSCH}$     | Total number of absolute subframes a PUSCH with repetition spans expressed as a number of absolute subframes                                                                      |
| $N_{rep}^{PUSCH}$     | Number of repetitions of a PUSCH transmission                                                                                                                                     |
| $N_{NB}^{ch, UL}$     | Number of consecutive absolute subframes over which PUCCH or PUSCH stays at the same narrowband before hopping to another narrowband, expressed as a number of absolute subframes |
| $f_{NB, hop}^{PUSCH}$ | Narrowband offset between one narrowband and the next narrowband a PUSCH hops to, expressed as a number of uplink narrowbands                                                     |
| $N_{abs}^{PUCCH}$     | Total number of absolute subframes a PUCCH with repetition spans, expressed as a number of absolute subframes                                                                     |
| $N_{rep}^{PUCCH}$     | Number of repetitions of a PUCCH transmission                                                                                                                                     |
| $N_{rep}^{PRACH}$     | Number of PRACH repetitions per preamble transmission attempt                                                                                                                     |
| $N_{sf}^{RA}$         | Number of subframes allowed for preamble transmission within a 1024-frame interval                                                                                                |
| $N_{start}^{PRACH}$   | PRACH starting subframe periodicity                                                                                                                                               |
| $N_{rep}^{NPRACH}$    | Number of NPRACH repetitions per preamble transmission attempt                                                                                                                    |
| $N_{period}^{NPRACH}$ | NPRACH resource periodicity                                                                                                                                                       |

|                                       |                                                                                                                                                                                    |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $N_{\text{scoffset}}^{\text{NPRACH}}$ | Frequency location of the first sub-carrier allocated to NPRACH                                                                                                                    |
| $N_{\text{sc}}^{\text{NPRACH}}$       | Number of sub-carriers allocated to NPRACH                                                                                                                                         |
| $N_{\text{sc\_cont}}^{\text{NPRACH}}$ | Number of starting sub-carriers allocated for UE initiated random access                                                                                                           |
| $N_{\text{start}}^{\text{NPRACH}}$    | NPRACH starting subframe                                                                                                                                                           |
| $N_{\text{MSG3}}^{\text{NPRACH}}$     | Fraction for starting subcarrier index for UE support for multi-tone msg3 transmission                                                                                             |
| $N_{\text{gap,period}}$               | Periodicity for NPDSCH/NPDCCH gaps                                                                                                                                                 |
| $N_{\text{gap,duration}}$             | Duration for NPDSCH/NPDCCH gaps                                                                                                                                                    |
| $N_{\text{gap,threshold}}$            | Threshold for applying NPDSCH/NPDCCH gaps                                                                                                                                          |
| $N_{\text{NB}}^{\text{DL}}$           | Total number of downlink narrowbands                                                                                                                                               |
| $N_{\text{WB}}^{\text{DL}}$           | Total number of downlink widebands                                                                                                                                                 |
| $N_{\text{abs}}^{\text{PDSCH}}$       | Total number of absolute subframes a PDSCH with repetition spans, expressed as a number of absolute subframes                                                                      |
| $N_{\text{rep}}^{\text{PDSCH}}$       | Number of repetitions of a PDSCH transmission                                                                                                                                      |
| $N_{\text{NB}}^{\text{ch,DL}}$        | Number of consecutive absolute subframes over which MPDCCH or PDSCH stays at the same narrowband before hopping to another narrowband, expressed as a number of absolute subframes |
| $N_{\text{hop}}^{\text{ch,DL}}$       | Number of narrowbands over which MPDCCH or PDSCH frequency hops                                                                                                                    |
| $f_{\text{hop}}^{\text{DL}}$          | Narrowband offset between one narrowband and the next narrowband an MPDCCH or PDSCH hops to, expressed as a number of downlink narrowbands                                         |
| $N_{\text{PDSCH}}^{\text{SIB1-BR}}$   | Number of times a PDSCH carrying SIB1-BR is transmitted over 8 radio frames                                                                                                        |
| $N_{\text{abs}}^{\text{MPDCCH}}$      | Total number of absolute subframes a MPDCCH with repetition spans, expressed as a number of absolute subframes                                                                     |
| $N_{\text{rep}}^{\text{MPDCCH}}$      | Number of repetitions of a MPDCCH transmission                                                                                                                                     |
| $N_{\text{abs,ss}}^{\text{MPDCCH}}$   | Total number of absolute subframes a MPDCCH search space with maximum repetition level spans, expressed as a number of absolute subframes                                          |
| $N_{\text{rep,ss}}^{\text{MPDCCH}}$   | Maximum repetition level of a MPDCCH search space                                                                                                                                  |
| $N_{\text{ECCE}}^{\text{MPDCCH}}$     | Number of ECCEs in a subframe for one MPDCCH                                                                                                                                       |
| $N_{\text{symb}}^{\text{DL}}$         | Number of OFDM symbols in a downlink slot                                                                                                                                          |
| $N_{\text{symb}}^{\text{UL}}$         | Number of SC-FDMA symbols in an uplink slot                                                                                                                                        |
| $N_{\text{symb}}^{\text{retune}}$     | Number of symbols in a guard period for narrowband or wideband retuning                                                                                                            |
| $N_{\text{slots}}^{\text{UL}}$        | Number of consecutive slots in an UL resource unit for NB-IoT                                                                                                                      |
| $N_{\text{symb}}^{\text{SL}}$         | Number of SC-FDMA symbols in a sidelink slot                                                                                                                                       |
| $N_{\text{sc}}^{\text{RB}}$           | Resource block size in the frequency domain, expressed as a number of subcarriers                                                                                                  |
| $N_{\text{sb}}$                       | Number of sub-bands for PUSCH frequency-hopping with predefined hopping pattern                                                                                                    |
| $N_{\text{RB}}^{\text{sb}}$           | Size of each sub-band for PUSCH frequency-hopping with predefined hopping pattern, expressed as a number of resource blocks                                                        |
| $N_{\text{sc}}^{\text{RA}}$           | Size of narrow-band random-access resource in number of subcarriers                                                                                                                |
| $N_{\text{SP}}$                       | Number of downlink to uplink switch points within the radio frame                                                                                                                  |
| $N_{\text{RS}}^{\text{PUCCH}}$        | Number of reference symbols per slot for PUCCH                                                                                                                                     |
| $N_{\text{RS}}^{\text{SPUCCH}}$       | Number of reference symbols per subslot or per slot for SPUCCH                                                                                                                     |
| $N_{\text{TA}}$                       | Timing offset between uplink and downlink radio frames at the UE, expressed in units of $T_s$                                                                                      |
| $N_{\text{offset}}^{\text{TA}}$       | Fixed timing advance offset, expressed in units of $T_s$                                                                                                                           |
| $N_{\text{TA,SL}}$                    | Timing offset between sidelink and timing reference frames at the UE, expressed in units of $T_s$                                                                                  |
| $n_{\text{PUCCH}}^{(1,\tilde{p})}$    | Resource index for PUCCH formats 1/1a/1b                                                                                                                                           |

|                                     |                                                                                                            |
|-------------------------------------|------------------------------------------------------------------------------------------------------------|
| $n_{\text{PUCCH}}^{(2,\tilde{p})}$  | Resource index for PUCCH formats 2/2a/2b                                                                   |
| $n_{\text{PUCCH}}^{(3,\tilde{p})}$  | Resource index for PUCCH format 3                                                                          |
| $n_{\text{PDCCH}}$                  | Number of PDCCHs present in a subframe                                                                     |
| $n_{\text{PRB}}$                    | Physical resource block number                                                                             |
| $n_{\text{PRB}}^{\text{RA}}$        | First physical resource block occupied by PRACH resource considered                                        |
| $n_{\text{PRB}}^{\text{RA,offset}}$ | First physical resource block available for PRACH                                                          |
| $n_{\text{PRB,RSS}}$                | Lowest PRB number of RSS                                                                                   |
| $n_{\text{sc}}^{\text{RA}}$         | Subcarrier occupied by NPRACH resource considered                                                          |
| $n_{\text{VRB}}$                    | Virtual resource block number                                                                              |
| $n_{\text{RNTI}}$                   | Radio network temporary identifier                                                                         |
| $n_{\text{ID}}^{\text{SA}}$         | Sidelink group destination identity                                                                        |
| $n_{\text{f}}$                      | System frame number                                                                                        |
| $n_{\text{s}}$                      | Slot number within a radio frame                                                                           |
| $n_{\text{sf}}^{\text{abs}}$        | Absolute subframe number                                                                                   |
| $n_{\text{sf}}^{\text{RA}}$         | Index for subframes allowed for preamble transmission                                                      |
| $O_{\text{RSS}}$                    | Starting frame offset of RSS in each RSS period                                                            |
| $P$                                 | Number of antenna ports used for transmission of a channel                                                 |
| $p$                                 | Antenna port number                                                                                        |
| $P_{\text{RSS}}$                    | Period of RSS measured in frames                                                                           |
| $q$                                 | Codeword number                                                                                            |
| $r_{\text{RA}}$                     | Index for PRACH versions with same preamble format and PRACH density                                       |
| $Q_m$                               | Modulation order: 1 for $\pi/2$ -BPSK, 2 for QPSK, 4 for 16QAM, 6 for 64QAM and 8 for 256QAM transmissions |
| $s_l^{(p)}(t)$                      | Time-continuous baseband signal for antenna port $p$ and SC-FDMA/OFDM symbol $l$ in a slot                 |
| $t_{\text{RA}}^{(0)}$               | Radio frame indicator index of PRACH opportunity                                                           |
| $t_{\text{RA}}^{(1)}$               | Half frame index of PRACH opportunity within the radio frame                                               |
| $t_{\text{RA}}^{(2)}$               | Uplink subframe number for start of PRACH opportunity within the half frame                                |
| $T_{\text{f}}$                      | Radio frame duration                                                                                       |
| $T_{\text{s}}$                      | Basic time unit                                                                                            |
| $T_{\text{slot}}$                   | Slot duration                                                                                              |
| $W$                                 | Precoding matrix for downlink spatial multiplexing                                                         |
| $\beta_{\text{PRACH}}$              | Amplitude scaling for PRACH                                                                                |
| $\beta_{\text{NPRACH}}$             | Amplitude scaling for NPRACH                                                                               |
| $\beta_{\text{PUCCH}}$              | Amplitude scaling for PUCCH                                                                                |
| $\beta_{\text{PUSCH}}$              | Amplitude scaling for PUSCH                                                                                |
| $\beta_{\text{NPUSCH}}$             | Amplitude scaling for NPUSCH                                                                               |
| $\beta_{\text{SPUCCH}}$             | Amplitude scaling for SPUCCH                                                                               |
| $\beta_{\text{SRS}}$                | Amplitude scaling for sounding reference symbols                                                           |
| $\Delta f$                          | Subcarrier spacing                                                                                         |
| $\Delta f_{\text{RA}}$              | Subcarrier spacing for the random access preamble                                                          |
| $v$                                 | Number of transmission layers                                                                              |

## 3.2 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [1].

|        |                                                             |
|--------|-------------------------------------------------------------|
| CCE    | Control Channel Element                                     |
| CDD    | Cyclic Delay Diversity                                      |
| CRS    | Cell-specific Reference Signal                              |
| CSI    | Channel-State Information                                   |
| DCI    | Downlink Control Information                                |
| DM-RS  | Demodulation Reference Signal                               |
| ECCE   | Enhanced Control Channel Element                            |
| EPDCCH | Enhanced Physical Downlink Control CHannel                  |
| EREG   | Enhanced Resource-Element Group                             |
| MPDCCH | MTC Physical Downlink Control Channel                       |
| MWUS   | MTC Wake-Up Signal                                          |
| NCCE   | Narrowband Control Channel Element                          |
| NPBCH  | Narrowband Physical Broadcast CHannel                       |
| NPDCCH | Narrowband Physical Downlink Control CHannel                |
| NPDSCH | Narrowband Physical Downlink Shared CHannel                 |
| NPRACH | Narrowband Physical Random Access CHannel                   |
| NPUSCH | Narrowband Physical Uplink Shared CHannel                   |
| NPRS   | Narrowband Positioning Reference Signal                     |
| NPSS   | Narrowband Primary Synchronization Signal                   |
| NSSS   | Narrowband Secondary Synchronization Signal                 |
| NRS    | Narrowband Reference Signal PBCH Physical Broadcast CHannel |
| NTN    | Non-Terrestrial Networks                                    |
| PCFICH | Physical Control Format Indicator CHannel                   |
| PDCCH  | Physical Downlink Control CHannel                           |
| PDSCH  | Physical Downlink Shared CHannel                            |
| PHICH  | Physical Hybrid-ARQ Indicator CHannel                       |
| PMCH   | Physical Multicast CHannel                                  |
| PRACH  | Physical Random Access CHannel                              |
| PRB    | Physical Resource Block                                     |
| PRG    | Precoding Resource Block Group                              |
| PRS    | Positioning Reference Signal                                |
| PSBCH  | Physical Sidelink Broadcast CHannel                         |
| PSCCH  | Physical Sidelink Control CHannel                           |
| PSDCH  | Physical Sidelink Discovery CHannel                         |
| PSSCH  | Physical Sidelink Shared CHannel                            |
| PUCCH  | Physical Uplink Control CHannel                             |
| PUSCH  | Physical Uplink Shared CHannel                              |
| REG    | Resource-Element Group                                      |
| RSS    | Resynchronization Signal                                    |
| SCCE   | Short Control Channel Element                               |
| SCG    | Secondary Cell Group                                        |
| SPDCCH | Short Physical Downlink Control CHannel                     |
| SPUCCH | Short Physical Uplink Control CHannel                       |
| SREG   | Short Resource-Element Group                                |
| SRS    | Sounding Reference Signal                                   |
| VRB    | Virtual Resource Block                                      |

---

## 4 Frame structure

Throughout this specification, unless otherwise noted, the size of various fields in the time domain is expressed as a number of time units  $T_s = 1/(15000 \times 2048)$  seconds.

Downlink, uplink and sidelink transmissions are organized into radio frames with  $T_f = 307200 \times T_s = 10$  ms duration. Three radio frame structures are supported:

- Type 1, applicable to FDD and IoT NTN TDD only,
- Type 2, applicable to TDD only,
- Type 3, applicable to LAA secondary cell operation only.

NOTE: LAA secondary cell operation only applies to frame structure type 3.

Transmissions in multiple cells can be aggregated where up to 31 secondary cells can be used in addition to the primary cell. Unless otherwise noted, the description in this specification applies to each of the up to 32 serving cells. In case of multi-cell aggregation, different frame structures can be used in the different serving cells.

## 4.1 Frame structure type 1 for FDD

Frame structure type 1 is applicable to both full duplex and half duplex FDD only. Each radio frame is  $T_f = 307200 \cdot T_s = 10$  ms long and consists of 10 subframes of length  $30720 \cdot T_s = 1$  ms, numbered from 0 to 9.

Subframe  $i$  in frame  $n_f$  has an absolute subframe number  $n_{sf}^{abs} = 10n_f + i$  where  $n_f$  is the system frame number.

For subframes using  $\Delta f = 2.5$  kHz,  $\Delta f = 7.5$  kHz, or  $\Delta f = 15$  kHz, subframe  $i$  is defined as two slots,  $2i$  and  $2i+1$ , of length  $T_{slot} = 15360 \cdot T_s = 0.5$  ms each.

For subframes using  $\Delta f = 1.25$  kHz, subframe  $i$  is defined as one slot,  $2i$ , of length  $T_{slot} = 30720 \cdot T_s = 1$  ms.

For transmissions using  $\Delta f = 1/(82944T_s) \approx 0.37$  kHz, a slot has a length of  $92160T_s = 3$  ms. There are 13 slots, numbered in increasing order from 0 to 12, in a 40 ms period starting at  $n_f \bmod 4 = 0$  with slot 0 starting at  $30720T_s$  in the 40 ms period.

For subframes using  $\Delta f = 15$  kHz, the subframe can further be divided into six subslots according to Table 4.1-1. Downlink subslot pattern 1 is applied if the number of symbols used for PDCCH is equal to 1 or 3 and downlink subslot pattern 2 is applied if the number of symbols used for PDCCH is equal to 2. For system bandwidths  $N_{RB}^{DL} \leq 10$ , subslot transmission is not supported in case 4 symbols used for PDCCH.

For FDD, 10 subframes, 20 slots, or up to 60 subslots are available for downlink transmission and 10 subframes, 20 slots, or up to 60 subslots are available for uplink transmissions in each 10 ms interval. Uplink and downlink transmissions are separated in the frequency domain. In half-duplex FDD operation, the UE cannot transmit and receive at the same time while there are no such restrictions in full-duplex FDD.

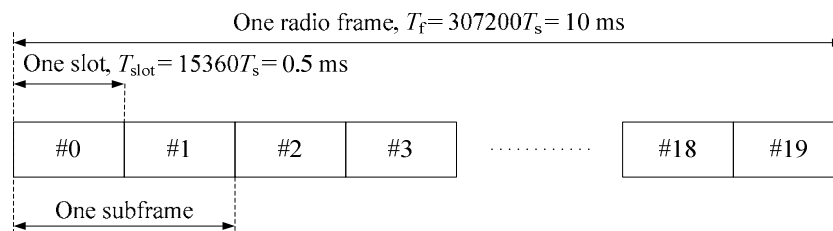


Figure 4.1-1: Frame structure type 1 (assuming  $\Delta f \in \{2.5, 7.5, 15\}$  kHz).

Table 4.1-1: SC-FDMA/OFDM symbols in different subslots of subframe  $i$

| Subslot number             | 0       | 1       | 2    | 3      | 4    | 5       |
|----------------------------|---------|---------|------|--------|------|---------|
| Slot number                | $2i$    |         |      | $2i+1$ |      |         |
| Uplink subslot pattern     | 0, 1, 2 | 3, 4    | 5, 6 | 0, 1   | 2, 3 | 4, 5, 6 |
| Downlink subslot pattern 1 | 0, 1, 2 | 3, 4    | 5, 6 | 0, 1   | 2, 3 | 4, 5, 6 |
| Downlink subslot pattern 2 | 0, 1    | 2, 3, 4 | 5, 6 | 0, 1   | 2, 3 | 4, 5, 6 |

## 4.2 Frame structure type 2

Frame structure type 2 is applicable to TDD only. Each radio frame of length  $T_f = 307200 \cdot T_s = 10$  ms consists of two half-frames of length  $153600 \cdot T_s = 5$  ms each. Each half-frame consists of five subframes of length  $30720 \cdot T_s = 1$  ms. Each subframe  $i$  is defined as two slots,  $2i$  and  $2i + 1$ , of length  $T_{\text{slot}} = 15360 \cdot T_s = 0.5$  ms each. Subframe  $i$  in frame  $n_f$  has an absolute subframe number  $n_{\text{sf}}^{\text{abs}} = 10n_f + i$  where  $n_f$  is the system frame number.

The uplink-downlink configuration in a cell may vary between frames and controls in which subframes uplink or downlink transmissions may take place in the current frame. The uplink-downlink configuration in the current frame is obtained according to Clause 13 in [4].

The supported uplink-downlink configurations are listed in Table 4.2-2 where, for each subframe in a radio frame, "D" denotes a downlink subframe reserved for downlink transmissions, "U" denotes an uplink subframe reserved for uplink transmissions and "S" denotes a special subframe with the three fields DwPTS, GP and UpPTS. The length of DwPTS and UpPTS is given by Table 4.2-1 subject to the total length of DwPTS, GP and UpPTS being equal to  $30720 \cdot T_s = 1$  ms where  $X$  is the number of additional SC-FDMA symbols in UpPTS provided by the higher layer parameter *srs-UpPtsAdd* if configured otherwise  $X$  is equal to 0. The UE is not expected to be configured with 2 additional UpPTS SC-FDMA symbols for special subframe configurations {3, 4, 7, 8} for normal cyclic prefix in downlink and special subframe configurations {2, 3, 5, 6} for extended cyclic prefix in downlink and 4 additional UpPTS SC-FDMA symbols for special subframe configurations {1, 2, 3, 4, 6, 7, 8} for normal cyclic prefix in downlink and special subframe configurations {1, 2, 3, 5, 6} for extended cyclic prefix in downlink.

Uplink-downlink configurations with both 5 ms and 10 ms downlink-to-uplink switch-point periodicity are supported.

- In case of 5 ms downlink-to-uplink switch-point periodicity, the special subframe exists in both half-frames.
- In case of 10 ms downlink-to-uplink switch-point periodicity, the special subframe exists in the first half-frame only.

Subframes 0 and 5 and DwPTS are always reserved for downlink transmission. For special subframe configurations 1, 2, 3, 4, 6, 7 and 8, DwPTS is split into two parts, of which the first part is a slot and the second part is of  $X$ -symbol duration within the second slot. Downlink subframes, downlink slots in the downlink subframe and DwPTS, and the  $X$ -symbol duration in the second slot of DwPTS are available for downlink transmission. The  $X$ -symbol transmission opportunity is only available for special subframe configuration 3,4 and 8.

UpPTS and the subframe immediately following the special subframe are always reserved for uplink transmission. Uplink subframes, uplink slots and UpPTS with special subframe configuration 10 are available for uplink transmission. Note that UpPTS with special subframe configuration 10 are not available for SPUCCH transmission.

In case multiple cells are aggregated, the UE may assume that the guard period of the special subframe in the cells using frame structure type 2 have an overlap of at least  $1456 \cdot T_s$ .

In case multiple cells with different uplink-downlink configurations in the current radio frame are aggregated and the UE is not capable of simultaneous reception and transmission in the aggregated cells, the following constraints apply:

- if the subframe in the primary cell is a downlink subframe, the UE shall not transmit any signal or channel on a secondary cell in the same subframe
- if the subframe in the primary cell is an uplink subframe, the UE is not expected to receive any downlink transmissions on a secondary cell in the same subframe
- if the subframe in the primary cell is a special subframe and the same subframe in a secondary cell is a downlink subframe, the UE is not expected to receive PDSCH/EPDCCH/PMCH/PRS transmissions in the secondary cell in the same subframe, and the UE is not expected to receive any other signals on the secondary cell in OFDM symbols that overlaps with the guard period or UpPTS in the primary cell.

For frame structure type 2, the higher-layer parameters for symbol-level resource reservation for BL/CE UEs (*symbolBitmap1* and *symbolBitmap2*) do not apply to special subframes.

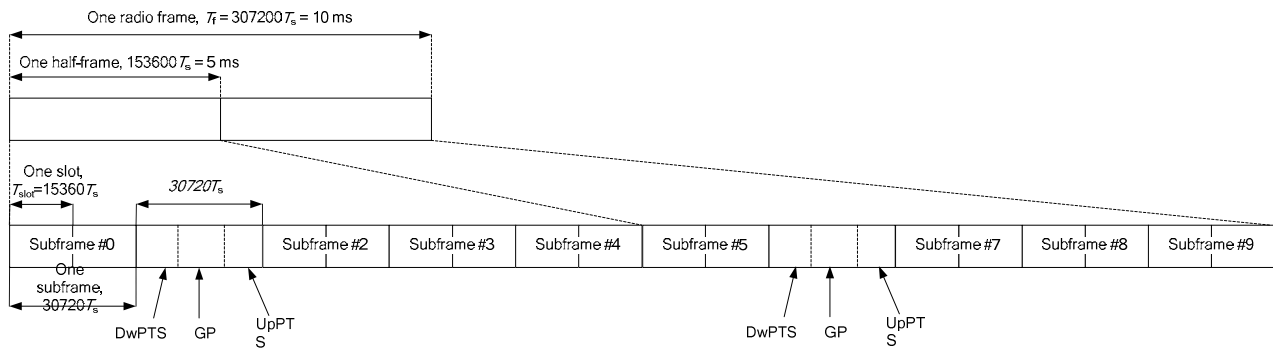


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity)

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

| Special subframe configuration n | Normal cyclic prefix in downlink |                                |                                  | Extended cyclic prefix in downlink |                                |                                  |
|----------------------------------|----------------------------------|--------------------------------|----------------------------------|------------------------------------|--------------------------------|----------------------------------|
|                                  | DwPTS                            | UpPTS                          |                                  | DwPTS                              | UpPTS                          |                                  |
|                                  |                                  | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |                                    | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |
| 0                                | $6592 \cdot T_s$                 | $(1 + X) \cdot 2192 \cdot T_s$ | $(1 + X) \cdot 2560 \cdot T_s$   | $7680 \cdot T_s$                   | $(1 + X) \cdot 2192 \cdot T_s$ | $(1 + X) \cdot 2560 \cdot T_s$   |
| 1                                | $19760 \cdot T_s$                |                                |                                  | $20480 \cdot T_s$                  |                                |                                  |
| 2                                | $21952 \cdot T_s$                |                                |                                  | $23040 \cdot T_s$                  |                                |                                  |
| 3                                | $24144 \cdot T_s$                |                                |                                  | $25600 \cdot T_s$                  |                                |                                  |
| 4                                | $26336 \cdot T_s$                |                                |                                  | $7680 \cdot T_s$                   |                                |                                  |
| 5                                | $6592 \cdot T_s$                 | $(2 + X) \cdot 2192 \cdot T_s$ | $(2 + X) \cdot 2560 \cdot T_s$   | $20480 \cdot T_s$                  | $(2 + X) \cdot 2192 \cdot T_s$ | $(2 + X) \cdot 2560 \cdot T_s$   |
| 6                                | $19760 \cdot T_s$                |                                |                                  | $23040 \cdot T_s$                  |                                |                                  |
| 7                                | $21952 \cdot T_s$                |                                |                                  | $12800 \cdot T_s$                  |                                |                                  |
| 8                                | $24144 \cdot T_s$                |                                |                                  | -                                  | -                              | -                                |
| 9                                | $13168 \cdot T_s$                |                                |                                  | -                                  | -                              | -                                |
| 10                               | $13168 \cdot T_s$                | $13152 \cdot T_s$              | $12800 \cdot T_s$                | -                                  | -                              | -                                |

Table 4.2-2: Uplink-downlink configurations

| Uplink-downlink configuration | Downlink-to-Uplink Switch-point periodicity | Subframe number |   |   |   |   |   |   |   |   |   |
|-------------------------------|---------------------------------------------|-----------------|---|---|---|---|---|---|---|---|---|
|                               |                                             | 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| 0                             | 5 ms                                        | D               | S | U | U | U | D | S | U | U | U |
| 1                             | 5 ms                                        | D               | S | U | U | D | D | S | U | U | D |
| 2                             | 5 ms                                        | D               | S | U | D | D | D | S | U | D | D |
| 3                             | 10 ms                                       | D               | S | U | U | U | D | D | D | D | D |
| 4                             | 10 ms                                       | D               | S | U | U | D | D | D | D | D | D |
| 5                             | 10 ms                                       | D               | S | U | D | D | D | D | D | D | D |
| 6                             | 5 ms                                        | D               | S | U | U | U | D | S | U | U | D |

### 4.3 Frame structure type 3

Frame structure type 3 is applicable to LAA secondary cell operation with normal cyclic prefix only. Each radio frame is  $T_f = 307200 \cdot T_s = 10$  ms long and consists of 20 slots of length  $T_{\text{slot}} = 15360 \cdot T_s = 0.5$  ms, numbered from 0 to 19. A subframe is defined as two consecutive slots where subframe  $i$  consists of slots  $2i$  and  $2i + 1$ .

The 10 subframes within a radio frame are available for downlink or uplink transmissions. Downlink transmissions occupy one or more consecutive subframes, starting anywhere within a subframe and ending with the last subframe either fully occupied or following one of the DwPTS durations in Table 4.2-1. Uplink transmissions occupy one or more consecutive subframes.

## 4.4 Frame structure type 1 for IoT NTN TDD

Frame structure type 1 is applicable to IoT NTN TDD in band 249. Each radio frame is  $T_f = 307200T_s = 10$  ms long and consists of 10 subframes of length  $30720T_s = 1$  ms, numbered from 0 to 9. Subframe  $i$  in frame  $n_f$  has an absolute subframe number  $n_{sf}^{abs} = 10n_f + i$  where  $n_f$  is the system frame number.

The frame structure for IoT NTN TDD, at the uplink time synchronization reference point defined in clause 16.1.2 of TS 36.213 [4] consists of  $D = 8$  consecutive downlink subframes, followed by 50 consecutive guard period subframes, followed by  $U = 8$  consecutive uplink subframes, followed by 24 consecutive guard period subframes in each 90 ms interval.

- The UE shall not assume any signal or channel being transmitted in subframes other than downlink subframes 3, 4, 5, 6, 7, 8, 9, and 0 across two consecutive radio frames.
- The UE shall not transmit any signal or channel on a subframe other than the 8 consecutive uplink subframes.

## 5 Uplink

### 5.1 Overview

The smallest resource unit for uplink transmissions is denoted a resource element and is defined in clause 5.2.2.

#### 5.1.1 Physical channels

An uplink physical channel corresponds to a set of resource elements carrying information originating from higher layers and is the interface defined between TS 36.212 [3] and the present document TS 36.211.

The following uplink physical channels are defined:

- Physical Uplink Shared Channel, PUSCH
- Physical Uplink Control Channel, PUCCH
- Short Physical Uplink Control Channel, SPUCCH
- Physical Random Access Channel, PRACH

#### 5.1.2 Physical signals

An uplink physical signal is used by the physical layer but does not carry information originating from higher layers. The following uplink physical signals are defined:

- Reference signal

## 5.2 Slot structure and physical resources

### 5.2.1 Resource grid

The transmitted signal in each slot is described by one or several resource grids of  $N_{RB}^{UL} N_{sc}^{RB}$  subcarriers and  $N_{symb}^{UL}$  SC-FDMA symbols. The resource grid is illustrated in Figure 5.2.1-1. The quantity  $N_{RB}^{UL}$  depends on the uplink transmission bandwidth configured in the cell and shall fulfil

$$N_{RB}^{min, UL} \leq N_{RB}^{UL} \leq N_{RB}^{max, UL}$$

where  $N_{RB}^{min, UL} = 6$  and  $N_{RB}^{max, UL} = 110$  are the smallest and largest uplink bandwidths, respectively, supported by the current version of this specification. The set of allowed values for  $N_{RB}^{UL}$  is given by TS 36.101 [7].

The number of SC-FDMA symbols in a slot depends on the cyclic prefix length configured by the higher layer parameter *UL-CyclicPrefixLength* and is given in Table 5.2.3-1.

An antenna port is defined such that the channel over which a symbol on the antenna port is conveyed can be inferred from the channel over which another symbol on the same antenna port is conveyed. There is one resource grid per antenna port. The antenna ports used for transmission of a physical channel or signal depends on the number of antenna ports configured for the physical channel or signal as shown in Table 5.2.1-1. The index  $\tilde{p}$  is used throughout clause 5 when a sequential numbering of the antenna ports is necessary.

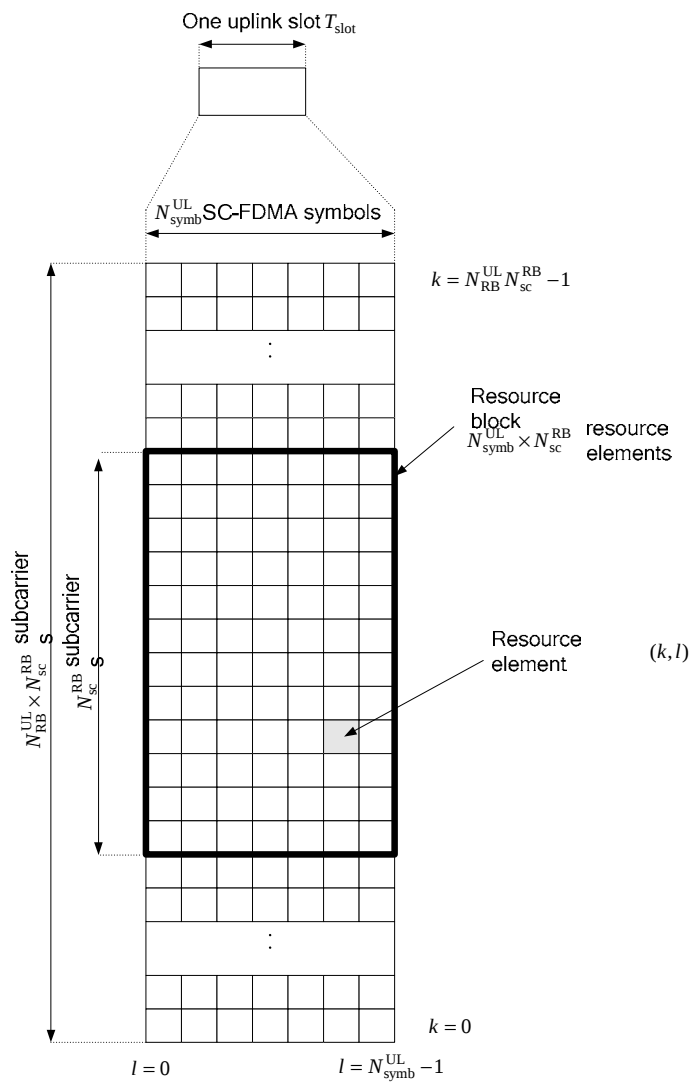


Figure 5.2.1-1: Uplink resource grid

Table 5.2.1-1: Antenna ports used for different physical channels and signals

| Physical channel or signal | Index $\tilde{p}$ | Antenna port number $p$ as a function of the number of antenna ports configured for the respective physical channel/signal |     |    |
|----------------------------|-------------------|----------------------------------------------------------------------------------------------------------------------------|-----|----|
|                            |                   | 1                                                                                                                          | 2   | 4  |
| PUSCH                      | 0                 | 10                                                                                                                         | 20  | 40 |
|                            | 1                 | -                                                                                                                          | 21  | 41 |
|                            | 2                 | -                                                                                                                          | -   | 42 |
|                            | 3                 | -                                                                                                                          | -   | 43 |
| SRS                        | 0                 | 10                                                                                                                         | 20  | 40 |
|                            | 1                 | -                                                                                                                          | 21  | 41 |
|                            | 2                 | -                                                                                                                          | -   | 42 |
|                            | 3                 | -                                                                                                                          | -   | 43 |
| PUCCH, SPUCCH              | 0                 | 100                                                                                                                        | 200 | -  |
|                            | 1                 | -                                                                                                                          | 201 | -  |

## 5.2.2 Resource elements

Each element in the resource grid is called a resource element and is uniquely defined by the index pair  $(k, l)$  in a slot where  $k = 0, \dots, N_{\text{RB}}^{\text{UL}} N_{\text{sc}}^{\text{RB}} - 1$  and  $l = 0, \dots, N_{\text{symb}}^{\text{UL}} - 1$  are the indices in the frequency and time domains, respectively.

Resource element  $(k, l)$  on antenna port  $p$  corresponds to the complex value  $a_{k,l}^{(p)}$ .

When there is no risk for confusion, or no particular antenna port is specified, the index  $p$  may be dropped.

Quantities  $a_{k,l}^{(p)}$  corresponding to resource elements not used for transmission of a physical channel or a physical signal in a slot shall be set to zero.

## 5.2.3 Resource blocks

A physical resource block is defined as  $N_{\text{symb}}^{\text{UL}}$  consecutive SC-FDMA symbols in the time domain and  $N_{\text{sc}}^{\text{RB}}$  consecutive subcarriers in the frequency domain, where  $N_{\text{symb}}^{\text{UL}}$  and  $N_{\text{sc}}^{\text{RB}}$  are given by Table 5.2.3-1.

A physical resource block in the uplink thus consists of  $N_{\text{symb}}^{\text{UL}} \times N_{\text{sc}}^{\text{RB}}$  resource elements, corresponding to one slot in the time domain and 180 kHz in the frequency domain.

**Table 5.2.3-1: Resource block parameters**

| Configuration          | $N_{\text{sc}}^{\text{RB}}$ | $N_{\text{symb}}^{\text{UL}}$ |
|------------------------|-----------------------------|-------------------------------|
| Normal cyclic prefix   | 12                          | 7                             |
| Extended cyclic prefix | 12                          | 6                             |

The relation between the physical resource block number  $n_{\text{PRB}}$  in the frequency domain and resource elements  $(k, l)$  in a slot is given by

$$n_{\text{PRB}} = \left\lfloor \frac{k}{N_{\text{sc}}^{\text{RB}}} \right\rfloor$$

## 5.2.3A Resource unit

Resource units are used to describe the mapping of PUSCH using sub-PRB allocations to resource elements for BL/CE UEs. A resource unit is defined as  $M_{\text{symb}}^{\text{UL}} M_{\text{slots}}^{\text{UL}}$  SC-FDMA symbols in the time domain and  $M_{\text{sc}}^{\text{RU}}$  consecutive subcarriers in the frequency domain, where  $M_{\text{sc}}^{\text{RU}}$  and  $M_{\text{symb}}^{\text{UL}}$  are given by Table 5.2.3A-1.

**Table 5.2.3A-1: Supported combinations of  $M_{\text{sc}}^{\text{RU}}$ ,  $M_{\text{slots}}^{\text{UL}}$ , and  $M_{\text{symb}}^{\text{UL}}$  for PUSCH using sub-PRB allocations for Frame Structure type 1 and Frame Structure type 2.**

| Physical channel | $\Delta f$ | Modulation scheme | $M_{\text{sc}}^{\text{UL}}$ | $M_{\text{sc}}^{\text{RU}}$ | $M_{\text{slots}}^{\text{UL}}$ | $M_{\text{symb}}^{\text{UL}}$ | Comment                     |
|------------------|------------|-------------------|-----------------------------|-----------------------------|--------------------------------|-------------------------------|-----------------------------|
| PUSCH            | 15 kHz     | $\pi/2$ -BPSK     | 12                          | 3                           | 16                             | 7                             | 2 out of 3 subcarriers used |
|                  |            | QPSK              |                             | 3                           | 8                              |                               |                             |
|                  |            |                   |                             | 6                           | 4                              |                               |                             |

## 5.2.4 Narrowbands and widebands

A narrowband is defined as six non-overlapping consecutive physical resource blocks in the frequency domain. The total number of uplink narrowbands in the uplink transmission bandwidth configured in the cell is given by

$$N_{\text{NB}}^{\text{UL}} = \left\lfloor \frac{N_{\text{RB}}^{\text{UL}}}{6} \right\rfloor$$

The narrowbands are numbered  $n_{NB} = 0, \dots, N_{NB}^{UL} - 1$  in order of increasing physical resource-block number where narrowband  $n_{NB}$  is composed of physical resource-block indices

$$\begin{cases} 6n_{NB} + i_0 + i & \text{if } N_{RB}^{UL} \bmod 2 = 0 \\ 6n_{NB} + i_0 + i & \text{if } N_{RB}^{UL} \bmod 2 = 1 \text{ and } n_{NB} < N_{NB}^{UL}/2 \\ 6n_{NB} + i_0 + i + 1 & \text{if } N_{RB}^{UL} \bmod 2 = 1 \text{ and } n_{NB} \geq N_{NB}^{UL}/2 \end{cases}$$

where

$$i = 0, 1, \dots, 5$$

$$i_0 = \left\lfloor \frac{N_{RB}^{UL}}{2} \right\rfloor - \frac{6N_{NB}^{UL}}{2}$$

If  $N_{NB}^{UL} \geq 4$ , a wideband is defined as four non-overlapping narrowbands in the frequency domain. The total number of uplink widebands in the uplink transmission bandwidth configured in the cell is given by

$$N_{WB}^{UL} = \left\lfloor \frac{N_{NB}^{UL}}{4} \right\rfloor$$

and the widebands are numbered  $n_{WB} = 0, \dots, N_{WB}^{UL} - 1$  in order of increasing narrowband number where wideband  $n_{WB}$  is composed of narrowband indices  $4n_{WB} + i$  where  $i = 0, 1, \dots, 3$ .

If  $N_{NB}^{UL} < 4$ , then  $N_{WB}^{UL} = 1$  and the single wideband is composed of the  $N_{NB}^{UL}$  non-overlapping narrowband(s).

### 5.2.5 Guard period for narrowband and wideband retuning

For BL/CE UEs, a guard period of at most  $N_{\text{synd}}^{\text{retune}}$  SC-FDMA symbols is created for Tx-to-Tx frequency retuning between two consecutive subframes.

- If the higher layer parameter *ce-RetuningSymbols* is set, then  $N_{\text{synd}}^{\text{retune}}$  equals *ce-RetuningSymbols*, otherwise  $N_{\text{synd}}^{\text{retune}} = 2$ .
- If the higher layer parameter *ce-pusch-maxBandwidth-config* is set to 5 MHz, then the rules for guard period creation defined in the remainder of this clause do not apply for retuning between narrowbands but for retuning between widebands and for transmissions involving multiple widebands.
- If a UE is configured with higher layer parameter *ce-PUSCH-FlexibleStartPRB-AllocConfig* and the allocation resources are not fully within one narrowband, the rules for guard period creation defined in the remainder of this clause apply for retuning between tuning narrowbands, where
  - In case of CEModeA, the tuning narrowband is defined as the 6 consecutive PRBs starting from  $RB_{start}$  defined in 8.1.1 of [4] with the center frequency set in the middle.
  - In case of CEModeB, the tuning narrowband is defined as the 6 consecutive PRBs with the center frequency set in the middle of allocated two PRBs.
- If the UE retunes from a first narrowband carrying PUSCH to a second narrowband carrying PUSCH, or if the UE retunes from a first narrowband carrying PUCCH to a second narrowband carrying PUCCH,
  - if  $N_{\text{synd}}^{\text{retune}} = 1$ , a guard period is created by the UE not transmitting the last SC-FDMA symbol in the first subframe;
  - if  $N_{\text{synd}}^{\text{retune}} = 2$ , a guard period is created by the UE not transmitting the last SC-FDMA symbol in the first subframe and the first SC-FDMA symbol in the second subframe.

- If the UE retunes from a first narrowband carrying PUCCH to a second narrowband carrying PUSCH,
  - if the PUCCH uses a shortened PUCCH format and  $N_{\text{symb}}^{\text{retune}} = 1$ , a guard period is created by the UE not transmitting the last SC-FDMA symbol in the first subframe;
  - if the PUCCH uses a shortened PUCCH format and  $N_{\text{symb}}^{\text{retune}} = 2$ , a guard period is created by the UE not transmitting the last SC-FDMA symbol in the first subframe and the first SC-FDMA symbol in the second subframe;
  - if the PUCCH uses a normal PUCCH format, a guard period is created by the UE not transmitting the first  $N_{\text{symb}}^{\text{retune}}$  SC-FDMA symbols in the second subframe.
- If the UE retunes from a first narrowband carrying PUSCH to a second narrowband carrying PUCCH,
  - a guard period is created by the UE not transmitting the last  $N_{\text{symb}}^{\text{retune}}$  SC-FDMA symbols in the first subframe.
- For CEModeA, if the PUSCH is associated with C-RNTI or SPS C-RNTI and the higher layer parameter *ce-pusch-maxBandwidth-config* is set to 5 MHz,
  - If the PUSCH resource allocation is within a 5 MHz wideband, the center frequency of the transmission bandwidth is the center frequency of the wideband;
  - If the PUSCH resource allocation spans two 5 MHz widebands, the center frequency of transmission bandwidth is in the center of PUSCH resource allocation.

Furthermore, for BL/CE UEs configured with the higher layer parameter *srs-UpPtsAdd*, a guard period of at most  $N_{\text{symb}}^{\text{retune}}$  SC-FDMA symbols is created for Tx-to-Tx frequency retuning between a first special subframe and a second uplink subframe for frame structure type 2 according to:


- If the UE retunes from a first narrowband carrying SRS in the last UpPTS symbol to a second narrowband carrying PUSCH,
  - a guard period is created by the UE not transmitting the first  $N_{\text{symb}}^{\text{retune}}$  SC-FDMA symbols in the second subframe.
- If the UE retunes from a first narrowband carrying SRS in the last but one UpPTS symbol, but not in the last UpPTS symbol, to a second narrowband carrying PUSCH,
  - if  $N_{\text{symb}}^{\text{retune}} = 1$ , a guard period is created by the UE not transmitting the last UpPTS symbol in the first subframe;
  - if  $N_{\text{symb}}^{\text{retune}} = 2$ , a guard period is created by the UE not transmitting the last UpPTS symbol in the first subframe and the first SC-FDMA symbol in the second subframe.
- If the UE retunes from a first narrowband carrying SRS to a second narrowband carrying PUCCH,
  - if  $N_{\text{symb}}^{\text{retune}} = 1$ , a guard period is created by the UE not transmitting the last UpPTS symbol in the first subframe;
  - if  $N_{\text{symb}}^{\text{retune}} = 2$ , a guard period is created by the UE not transmitting the last UpPTS symbol in the first subframe and the first SC-FDMA symbol in the second subframe.

For  $N_{\text{symb}}^{\text{retune}} > 0$ , and for SRS transmission in a special subframe, a BL/CE UE is not expected to be configured with a first SRS transmission in symbol  $l$  and a second SRS transmission in any of symbols  $\{l+1, \dots, l+N_{\text{symb}}^{\text{retune}}\}$  if the first SRS transmission and the second SRS transmission use different narrowbands.

## 5.3 Physical uplink shared channel

The baseband signal representing the physical uplink shared channel is defined in terms of the following steps:

- scrambling
- modulation of scrambled bits to generate complex-valued symbols
- mapping of the complex-valued modulation symbols onto one or several transmission layers
- transform precoding to generate complex-valued symbols
- precoding of the complex-valued symbols
- mapping of precoded complex-valued symbols to resource elements
- generation of complex-valued time-domain SC-FDMA signal for each antenna port

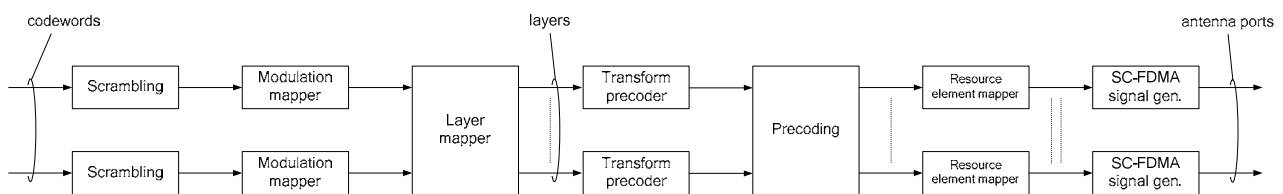

**Figure 5.3-1: Overview of uplink physical channel processing**

### 5.3.1 Scrambling

For each codeword  $q$ , the block of bits  $b^{(q)}(0), \dots, b^{(q)}(M_{\text{bit}}^{(q)} - 1)$ , where  $M_{\text{bit}}^{(q)}$  is the number of bits transmitted in codeword  $q$  on the physical uplink shared channel in subframe(s)/slot/subslot, shall be scrambled with a UE-specific scrambling sequence prior to modulation, resulting in a block of scrambled bits  $\tilde{b}^{(q)}(0), \dots, \tilde{b}^{(q)}(M_{\text{bit}}^{(q)} - 1)$  according to the following pseudo code

Set  $i = 0$

while  $i < M_{\text{bit}}^{(q)}$

if  $b^{(q)}(i) = x$  // ACK/NACK or Rank Indication placeholder bits

$\tilde{b}^{(q)}(i) = 1$

else

if  $b^{(q)}(i) = y$  // ACK/NACK or Rank Indication repetition placeholder bits

$\tilde{b}^{(q)}(i) = \tilde{b}^{(q)}(i-1)$

else // Data or channel quality coded bits, Rank Indication coded bits or ACK/NACK coded bits

$\tilde{b}^{(q)}(i) = (b^{(q)}(i) + c^{(q)}(i)) \bmod 2$

end if

end if

$i = i + 1$

end while

where  $x$  and  $y$  are tags defined in TS 36.212 [3] clause 5.2.2.6 and where the scrambling sequence  $c^{(q)}(i)$  is given by clause 7.2. The scrambling sequence generator shall be initialised with  $c_{\text{init}} = n_{\text{RNTI}} \cdot 2^{14} + q \cdot 2^{13} + \lfloor n_s/2 \rfloor \cdot 2^9 + N_{\text{ID}}^{\text{cell}}$  at the start of each subframe where  $n_{\text{RNTI}}$  corresponds to the RNTI associated with the PUSCH transmission as described in clause 8 in TS 36.213 [4]. For AUL PUSCH,  $n_{\text{RNTI}} = 0$ .

For BL/CE UEs,

- if the PUSCH transmission is using sub-PRB allocations, the scrambling sequence generator shall be initialised with

$$c_{\text{init}} = n_{\text{RNTI}} \cdot 2^{14} + q \cdot 2^{13} + \left\lfloor \left\lfloor \frac{i}{M_{\text{RU}} \cdot M_{\text{slots}}^{\text{UL}} / 2} \right\rfloor \bmod 10 \right\rfloor \cdot 2^9 + N_{\text{ID}}^{\text{cell}}$$

at the first valid uplink subframe of every  $M_{\text{RU}} \cdot M_{\text{slots}}^{\text{UL}} / 2$  subframes comprising the allocated UL resource unit(s), where  $i = 0, 1, \dots, N - 1$ , and  $N$  is the number of BL/CE UL subframes for the PUSCH transmission as determined in clause 8.0 in [4].

- otherwise, the same scrambling sequence is applied per subframe to PUSCH for a given block of  $N_{\text{acc}}$  subframes. The subframe number of the first subframe in each block of  $N_{\text{acc}}$  consecutive subframes, denoted as  $n_{\text{abs},1}$ , satisfies  $n_{\text{abs},1} \bmod N_{\text{acc}} = 0$ . For the  $j^{\text{th}}$  block of  $N_{\text{acc}}$  subframes, the scrambling sequence generator shall be initialised with

$$c_{\text{init}} = n_{\text{RNTI}} \cdot 2^{14} + q \cdot 2^{13} + [(j_0 + j)N_{\text{acc}} \bmod 10] \cdot 2^9 + N_{\text{ID}}^{\text{cell}}$$

where

$$j = 0, 1, \dots, \left\lfloor \frac{i_0 + N_{\text{abs}}^{\text{PUSCH}} - 1}{N_{\text{acc}}} \right\rfloor - j_0$$

$$j_0 = \lfloor i_0 / N_{\text{acc}} \rfloor$$

and  $i_0$  is the absolute subframe number of the first uplink subframe intended for PUSCH. The PUSCH transmission spans  $N_{\text{abs}}^{\text{PUSCH}}$  consecutive subframes including subframes that are not BL/CE UL subframes where the UE postpones the PUSCH transmission. For a BL/CE UE configured in CEModeA,  $N_{\text{acc}} = 1$ . For a BL/CE UE configured with CEModeB,  $N_{\text{acc}} = 4$  for frame structure type 1 and  $N_{\text{acc}} = 5$  for frame structure type 2.

For PUSCH with a subframe duration, up to two codewords can be transmitted in one subframe, i.e.,  $q \in \{0, 1\}$ . In the case of single-codeword transmission,  $q = 0$ .

### 5.3.2 Modulation

For each codeword  $q$ , the block of scrambled bits  $\tilde{b}^{(q)}(0), \dots, \tilde{b}^{(q)}(M_{\text{bit}}^{(q)} - 1)$  shall be modulated as described in clause 7.1, resulting in a block of complex-valued symbols  $d^{(q)}(0), \dots, d^{(q)}(M_{\text{symb}}^{(q)} - 1)$ . Table 5.3.2-1 specifies the modulation mappings applicable for the physical uplink shared channel. For sub-PRB allocations only  $\pi/2$  BPSK and QPSK are supported.

**Table 5.3.2-1: Uplink modulation schemes**

| Physical channel | Modulation schemes                       |
|------------------|------------------------------------------|
| PUSCH            | $\pi/2$ BPSK, QPSK, 16QAM, 64QAM, 256QAM |

### 5.3.2A Layer mapping

The complex-valued modulation symbols for each of the codewords to be transmitted are mapped onto one or two layers. Complex-valued modulation symbols  $d^{(q)}(0), \dots, d^{(q)}(M_{\text{symb}}^{(q)} - 1)$  for codeword  $q$  shall be mapped onto the layers  $x(i) = [x^{(0)}(i) \ \dots \ x^{(v-1)}(i)]^T$ ,  $i = 0, 1, \dots, M_{\text{symb}}^{\text{layer}} - 1$  where  $v$  is the number of layers and  $M_{\text{symb}}^{\text{layer}}$  is the number of modulation symbols per layer.

#### 5.3.2A.1 Layer mapping for transmission on a single antenna port

For transmission on a single antenna port, a single layer is used,  $v = 1$ , and the mapping is defined by

$$x^{(0)}(i) = d^{(0)}(i)$$

with  $M_{\text{symb}}^{\text{layer}} = M_{\text{symb}}^{(0)}$ .

#### 5.3.2A.2 Layer mapping for spatial multiplexing

For spatial multiplexing, the layer mapping shall be done according to Table 5.3.2A.2-1. The number of layers  $v$  is less than or equal to the number of antenna ports  $P$  used for transmission of the physical uplink shared channel. The case of a single codeword mapped to multiple layers is only applicable when the number of antenna ports used for PUSCH is four, except for slot-PUSCH and subslot-PUSCH transmission where a single codeword is used irrespective of the number of layers.

**Table 5.3.2A.2-1: Codeword-to-layer mapping for spatial multiplexing**

| Number of layers                                   | Number of codewords | Codeword-to-layer mapping<br>$i = 0, 1, \dots, M_{\text{symb}}^{\text{layer}} - 1$                                         |                                                                                          |
|----------------------------------------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| 1                                                  | 1                   | $x^{(0)}(i) = d^{(0)}(i)$                                                                                                  | $M_{\text{symb}}^{\text{layer}} = M_{\text{symb}}^{(0)}$                                 |
| 2                                                  | 1                   | $x^{(0)}(i) = d^{(0)}(2i)$<br>$x^{(1)}(i) = d^{(0)}(2i+1)$                                                                 | $M_{\text{symb}}^{\text{layer}} = M_{\text{symb}}^{(0)} / 2$                             |
| 2                                                  | 2                   | $x^{(0)}(i) = d^{(0)}(i)$<br>$x^{(1)}(i) = d^{(1)}(i)$                                                                     | $M_{\text{symb}}^{\text{layer}} = M_{\text{symb}}^{(0)} = M_{\text{symb}}^{(1)}$         |
| 3                                                  | 2                   | $x^{(0)}(i) = d^{(0)}(i)$<br>$x^{(1)}(i) = d^{(1)}(2i)$<br>$x^{(2)}(i) = d^{(1)}(2i+1)$                                    | $M_{\text{symb}}^{\text{layer}} = M_{\text{symb}}^{(0)} = M_{\text{symb}}^{(1)} / 2$     |
| 4                                                  | 2                   | $x^{(0)}(i) = d^{(0)}(2i)$<br>$x^{(1)}(i) = d^{(0)}(2i+1)$<br>$x^{(2)}(i) = d^{(1)}(2i)$<br>$x^{(3)}(i) = d^{(1)}(2i+1)$   | $M_{\text{symb}}^{\text{layer}} = M_{\text{symb}}^{(0)} / 2 = M_{\text{symb}}^{(1)} / 2$ |
| 4 <sup>1</sup>                                     | 1 <sup>1</sup>      | $x^{(0)}(i) = d^{(0)}(4i)$<br>$x^{(1)}(i) = d^{(0)}(4i+1)$<br>$x^{(2)}(i) = d^{(0)}(4i+2)$<br>$x^{(3)}(i) = d^{(0)}(4i+3)$ | $M_{\text{symb}}^{\text{layer}} = M_{\text{symb}}^{(0)} / 4$                             |
| NOTE 1: Only used for slot-PUSCH and subslot-PUSCH |                     |                                                                                                                            |                                                                                          |

### 5.3.3 Transform precoding

For each layer  $\lambda = 0, 1, \dots, \nu - 1$  the block of complex-valued symbols  $x^{(\lambda)}(0), \dots, x^{(\lambda)}(M_{\text{symb}}^{\text{layer}} - 1)$  is divided into  $M_{\text{symb}}^{\text{layer}} / M_{\text{sc}}^{\text{PUSCH}}$  sets, each corresponding to one SC-FDMA symbol. Transform precoding shall be applied according to

$$y^{(\lambda)}(l \cdot M_{\text{sc}}^{\text{PUSCH}} + k) = \frac{1}{\sqrt{M_{\text{sc}}^{\text{PUSCH}}}} \sum_{i=0}^{M_{\text{sc}}^{\text{PUSCH}} - 1} x^{(\lambda)}(l \cdot M_{\text{sc}}^{\text{PUSCH}} + i) e^{-j \frac{2\pi i k}{M_{\text{sc}}^{\text{PUSCH}}}}$$

$$k = 0, \dots, M_{\text{sc}}^{\text{PUSCH}} - 1$$

$$l = 0, \dots, M_{\text{symb}}^{\text{layer}} / M_{\text{sc}}^{\text{PUSCH}} - 1$$

resulting in a block of complex-valued symbols  $y^{(\lambda)}(0), \dots, y^{(\lambda)}(M_{\text{symb}}^{\text{layer}} - 1)$ . The variable  $M_{\text{sc}}^{\text{PUSCH}} = M_{\text{RB}}^{\text{PUSCH}} \cdot N_{\text{sc}}^{\text{RB}}$ , where  $M_{\text{RB}}^{\text{PUSCH}}$  represents the bandwidth of the PUSCH in terms of resource blocks, and shall fulfil

$$M_{\text{RB}}^{\text{PUSCH}} = 2^{\alpha_2} \cdot 3^{\alpha_3} \cdot 5^{\alpha_5} \leq N_{\text{RB}}^{\text{UL}}$$

where  $\alpha_2, \alpha_3, \alpha_5$  is a set of non-negative integers.

In case of PUSCH transmissions using sub-PRB allocations for BL/CE UEs, the variable  $M_{\text{sc}}^{\text{PUSCH}} = M_{\text{sc}}^{\text{RU}} + Q_m - 2$ .

#### 5.3.3A Precoding

The precoder takes as input a block of vectors  $[y^{(0)}(i) \ \dots \ y^{(\nu-1)}(i)]^T$ ,  $i = 0, 1, \dots, M_{\text{symb}}^{\text{layer}} - 1$  from the transform precoder and generates a block of vectors  $[z^{(0)}(i) \ \dots \ z^{(P-1)}(i)]^T$ ,  $i = 0, 1, \dots, M_{\text{symb}}^{\text{ap}} - 1$  to be mapped onto resource elements.

##### 5.3.3A.1 Precoding for transmission on a single antenna port

For transmission on a single antenna port, precoding is defined by

$$z^{(0)}(i) = y^{(0)}(i)$$

where  $i = 0, 1, \dots, M_{\text{symb}}^{\text{ap}} - 1$ ,  $M_{\text{symb}}^{\text{ap}} = M_{\text{symb}}^{\text{layer}}$ .

##### 5.3.3A.2 Precoding for spatial multiplexing

Precoding for spatial multiplexing is only used in combination with layer mapping for spatial multiplexing as described in clause 5.3.2A.2. Spatial multiplexing supports  $P = 2$  or  $P = 4$  antenna ports where the set of antenna ports used for spatial multiplexing is  $p \in \{20, 21\}$  and  $p \in \{40, 41, 42, 43\}$ , respectively.

Precoding for spatial multiplexing is defined by

$$\begin{bmatrix} z^{(0)}(i) \\ \vdots \\ z^{(P-1)}(i) \end{bmatrix} = W \begin{bmatrix} y^{(0)}(i) \\ \vdots \\ y^{(\nu-1)}(i) \end{bmatrix}$$

where  $i = 0, 1, \dots, M_{\text{symb}}^{\text{ap}} - 1$ ,  $M_{\text{symb}}^{\text{ap}} = M_{\text{symb}}^{\text{layer}}$ .

The precoding matrix  $W$  of size  $P \times \nu$  is given by one of the entries in Table 5.3.3A.2-1 for  $P = 2$  and by Tables 5.3.3A.2-2 through 5.3.3A.2-5 for  $P = 4$  where the entries in each row are ordered from left to right in increasing order of codebook indices.

**Table 5.3.3A.2-1: Codebook for transmission on antenna ports {20,21}**

| Codebook index | Number of layers                                           |                                                                   |
|----------------|------------------------------------------------------------|-------------------------------------------------------------------|
|                | $v = 1$                                                    | $v = 2$                                                           |
| 0              | $\frac{1}{\sqrt{2}} \begin{bmatrix} 1 \\ 1 \end{bmatrix}$  | $\frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix}$ |
| 1              | $\frac{1}{\sqrt{2}} \begin{bmatrix} 1 \\ -1 \end{bmatrix}$ | -                                                                 |
| 2              | $\frac{1}{\sqrt{2}} \begin{bmatrix} 1 \\ j \end{bmatrix}$  | -                                                                 |
| 3              | $\frac{1}{\sqrt{2}} \begin{bmatrix} 1 \\ -j \end{bmatrix}$ | -                                                                 |
| 4              | $\frac{1}{\sqrt{2}} \begin{bmatrix} 1 \\ 0 \end{bmatrix}$  | -                                                                 |
| 5              | $\frac{1}{\sqrt{2}} \begin{bmatrix} 0 \\ 1 \end{bmatrix}$  | -                                                                 |

**Table 5.3.3A.2-2: Codebook for transmission on antenna ports {40,41,42,43} with  $v = 1$** 

| Codebook index | Number of layers $v = 1$                                      |                                                                |                                                                 |                                                                |                                                                |                                                                |                                                                |                                                                |
|----------------|---------------------------------------------------------------|----------------------------------------------------------------|-----------------------------------------------------------------|----------------------------------------------------------------|----------------------------------------------------------------|----------------------------------------------------------------|----------------------------------------------------------------|----------------------------------------------------------------|
| 0 – 7          | $\frac{1}{2} \begin{bmatrix} 1 \\ 1 \\ 1 \\ -1 \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 1 \\ 1 \\ j \\ j \end{bmatrix}$   | $\frac{1}{2} \begin{bmatrix} 1 \\ 1 \\ -1 \\ 1 \end{bmatrix}$   | $\frac{1}{2} \begin{bmatrix} 1 \\ 1 \\ -j \\ -j \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 1 \\ j \\ 1 \\ j \end{bmatrix}$   | $\frac{1}{2} \begin{bmatrix} 1 \\ j \\ j \\ 1 \end{bmatrix}$   | $\frac{1}{2} \begin{bmatrix} 1 \\ j \\ -1 \\ -j \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 1 \\ j \\ -j \\ -1 \end{bmatrix}$ |
| 8 – 15         | $\frac{1}{2} \begin{bmatrix} 1 \\ -1 \\ 1 \\ 1 \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 1 \\ -1 \\ j \\ -j \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 1 \\ -1 \\ -1 \\ -1 \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 1 \\ -1 \\ -j \\ j \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 1 \\ -j \\ 1 \\ -j \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 1 \\ -j \\ j \\ -1 \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 1 \\ -j \\ -1 \\ j \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 1 \\ -j \\ -j \\ 1 \end{bmatrix}$ |
| 16 – 23        | $\frac{1}{2} \begin{bmatrix} 1 \\ 0 \\ 1 \\ 0 \end{bmatrix}$  | $\frac{1}{2} \begin{bmatrix} 1 \\ 0 \\ -1 \\ 0 \end{bmatrix}$  | $\frac{1}{2} \begin{bmatrix} 1 \\ 0 \\ j \\ 0 \end{bmatrix}$    | $\frac{1}{2} \begin{bmatrix} 1 \\ 0 \\ -j \\ 0 \end{bmatrix}$  | $\frac{1}{2} \begin{bmatrix} 0 \\ 1 \\ 0 \\ 1 \end{bmatrix}$   | $\frac{1}{2} \begin{bmatrix} 0 \\ 1 \\ 0 \\ -1 \end{bmatrix}$  | $\frac{1}{2} \begin{bmatrix} 0 \\ 1 \\ 0 \\ j \end{bmatrix}$   | $\frac{1}{2} \begin{bmatrix} 0 \\ 1 \\ 0 \\ -j \end{bmatrix}$  |

**Table 5.3.3A.2-3: Codebook for transmission on antenna ports {40,41,42,43} with  $v = 2$** 

| Codebook index | Number of layers $v = 2$                                                       |                                                                               |                                                                               |                                                                                |
|----------------|--------------------------------------------------------------------------------|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| 0 – 3          | $\frac{1}{2} \begin{bmatrix} 1 & 0 \\ 1 & 0 \\ 0 & 1 \\ 0 & -j \end{bmatrix}$  | $\frac{1}{2} \begin{bmatrix} 1 & 0 \\ 1 & 0 \\ 0 & 1 \\ 0 & j \end{bmatrix}$  | $\frac{1}{2} \begin{bmatrix} 1 & 0 \\ -j & 0 \\ 0 & 1 \\ 0 & 1 \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 1 & 0 \\ -j & 0 \\ 0 & 1 \\ 0 & -1 \end{bmatrix}$ |
| 4 – 7          | $\frac{1}{2} \begin{bmatrix} 1 & 0 \\ -1 & 0 \\ 0 & 1 \\ 0 & -j \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 1 & 0 \\ -1 & 0 \\ 0 & 1 \\ 0 & j \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 1 & 0 \\ j & 0 \\ 0 & 1 \\ 0 & 1 \end{bmatrix}$  | $\frac{1}{2} \begin{bmatrix} 1 & 0 \\ j & 0 \\ 0 & 1 \\ 0 & -1 \end{bmatrix}$  |

|         |                                                                              |                                                                               |                                                                               |                                                                                |
|---------|------------------------------------------------------------------------------|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| 8 – 11  | $\frac{1}{2} \begin{bmatrix} 1 & 0 \\ 0 & 1 \\ 1 & 0 \\ 0 & 1 \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 1 & 0 \\ 0 & 1 \\ 1 & 0 \\ 0 & -1 \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 1 & 0 \\ 0 & 1 \\ -1 & 0 \\ 0 & 1 \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 1 & 0 \\ 0 & 1 \\ -1 & 0 \\ 0 & -1 \end{bmatrix}$ |
| 12 – 15 | $\frac{1}{2} \begin{bmatrix} 1 & 0 \\ 0 & 1 \\ 0 & 1 \\ 1 & 0 \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 1 & 0 \\ 0 & 1 \\ 0 & -1 \\ 1 & 0 \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 1 & 0 \\ 0 & 1 \\ 0 & 1 \\ -1 & 0 \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 1 & 0 \\ 0 & 1 \\ 0 & -1 \\ -1 & 0 \end{bmatrix}$ |

**Table 5.3.3A.2-4: Codebook for transmission on antenna ports {40,41,42,43} with  $v = 3$** 

| Codebook index | Number of layers $v = 3$                                                                     |                                                                                               |                                                                                              |                                                                                               |
|----------------|----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| 0 – 3          | $\frac{1}{2} \begin{bmatrix} 1 & 0 & 0 \\ 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 1 & 0 & 0 \\ -1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 1 & 0 & 0 \\ 0 & 0 & 1 \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ -1 & 0 & 0 \\ 0 & 0 & 1 \end{bmatrix}$ |
| 4 – 7          | $\frac{1}{2} \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \\ 1 & 0 & 0 \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \\ -1 & 0 & 0 \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 0 & 1 & 0 \\ 1 & 0 & 0 \\ 1 & 0 & 0 \\ 0 & 0 & 1 \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 0 & 1 & 0 \\ 1 & 0 & 0 \\ -1 & 0 & 0 \\ 0 & 0 & 1 \end{bmatrix}$ |
| 8 – 11         | $\frac{1}{2} \begin{bmatrix} 0 & 1 & 0 \\ 1 & 0 & 0 \\ 0 & 0 & 1 \\ 1 & 0 & 0 \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 0 & 1 & 0 \\ 1 & 0 & 0 \\ 0 & 0 & 1 \\ -1 & 0 & 0 \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ 1 & 0 & 0 \\ 1 & 0 & 0 \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ 1 & 0 & 0 \\ -1 & 0 & 0 \end{bmatrix}$ |

**Table 5.3.3A.2-5: Codebook for transmission on antenna ports {40,41,42,43} with  $v = 4$** 

| Codebook index | Number of layers $v = 4$                                                                                     |
|----------------|--------------------------------------------------------------------------------------------------------------|
| 0              | $\frac{1}{2} \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$ |

### 5.3.4 Mapping to physical resources

For each antenna port  $p$  used for transmission of the PUSCH in a subframe the block of complex-valued symbols  $z^{(\tilde{p})}(0), \dots, z^{(\tilde{p})}(M_{\text{symb}}^{\text{ap}} - 1)$  shall be multiplied with the amplitude scaling factor  $\beta_{\text{PUSCH}}$  in order to conform to the transmit power  $P_{\text{PUSCH}}$  specified in clause 5.1.1.1 in TS 36.213 [4], and mapped in sequence starting with  $z^{(\tilde{p})}(0)$  to physical resource blocks on antenna port  $p$  and assigned for transmission of PUSCH. The relation between the index  $\tilde{p}$  and the antenna port number  $p$  is given by Table 5.2.1-1. The mapping to resource elements  $(k, l)$  corresponding to the physical resource blocks assigned for transmission shall fulfil the following criteria:

- not used for transmission of reference signals, and
- not part of the last SC-FDMA symbol in a subframe, if the UE transmits SRS in the same subframe in the same serving cell, and

- not part of the last SC-FDMA symbol in a subframe configured with cell-specific SRS for non-BL/CE UEs and BL/CE UEs in CEModeA, if the PUSCH transmission partly or fully overlaps with the cell-specific SRS bandwidth, and
- not part of an SC-FDMA symbol reserved for possible trigger type 1 SRS transmission as specified in [4] in a UE-specific aperiodic SRS subframe in the same serving cell, and
- not part of an SC-FDMA symbol reserved for possible trigger type 0 SRS transmission as specified in [4] in a UE-specific periodic SRS subframe in the same serving cell when the UE is configured with multiple TAGs
- not part of the first SC-FDMA symbol in a subframe if the associated DCI indicates PUSCH starting position '01', '10', or '11' and does not indicate PUSCH mode 2.
- not part of the first SC-FDMA symbol in the second slot in a subframe if the associated DCI indicates PUSCH starting position '01', '10', or '11' and PUSCH mode 2.
- not part of the last SC-FDMA symbol in a subframe if the associated DCI indicates PUSCH ending symbol '1' and does not indicate PUSCH mode 3.
- not part of the second slot in a subframe if the associated DCI indicates PUSCH ending symbol '0' and PUSCH mode 3.
- not part of SC-FDMA symbols 5 to 13 in a subframe if the associated DCI indicates PUSCH ending symbol '1' and PUSCH mode 3.

The mapping to resource elements  $(k, l)$  shall be in increasing order of first the index  $k$ , then the index  $l$ . The mapping starts with the first slot in an uplink subframe, except for slot-PUSCH, subslot-PUSCH transmission, or PUSCH mode 2.

In case of PUSCH transmissions using sub-PRB allocations for BL/CE UEs, the mapping starts over in every valid uplink subframe composing an UL resource unit.

In case of slot-PUSCH, the mapping shall start at  $l = 0$  in the slot assigned for transmission.

In case of PUSCH mode 2, the mapping shall start at  $l = 0$  in the second slot of the subframe assigned for transmission.

In case of subslot-PUSCH, the mapping shall start at symbol  $l$  where the start of the mapping is dependent on the uplink subslot number in the subframe assigned for transmission and the *DMRS-pattern* field in the related uplink DCI format [3] according to Table 5.3.4-1 where starting symbol index "4" for subslot #5 is applied if the UE has indicated the capability *ul-pattern-ddd-r15*.

**Table 5.3.4-1: Starting symbol index for subslot-PUSCH transmission**

| <i>DMRS-pattern</i> field in uplink-related DCI format [3] | Uplink subslot number |    |    |    |    |    |
|------------------------------------------------------------|-----------------------|----|----|----|----|----|
|                                                            | #0                    | #1 | #2 | #3 | #4 | #5 |
| 00                                                         | 1                     | 4  | 6  | 1  | 3  | 5  |
| 01                                                         | 0                     | 3  | 5  | 0  | 2  | 4  |
| 10                                                         | –                     | 3  | –  | 0  | 2  | –  |
| 11                                                         | –                     | 3  | –  | –  | 2  | –  |

In case of a semi-persistently scheduled subslot-PUSCH, and semi-persistent scheduling (i.e. higher layer parameter *sps-ConfigUL-STTI* is configured, see TS 36.331 [9]) with a configured periodicity of 1 subslot (i.e. *semiPersistSchedIntervalUL-STTI* set to *sTTI1*), the mapping shall start at symbol  $l$  depending on the *DMRS-pattern* field in the related uplink DCI format [3] according to Table 5.3.4-2.

In case of a semi-persistently scheduled subslot-PUSCH and semi-persistent scheduling (the higher layer parameter *sps-ConfigUL-STTI-r15* is configured, see TS 36.331 [9]) with repetitions enabled (the higher layer parameter *totalNumberPUSCH-SPS-STTI-UL-Repetitions* is configured), the mapping shall start at symbol  $l$  depending on the *DMRS-pattern* field in the related uplink DCI format [3] according to Table 5.3.4-2.

**Table 5.3.4-2: Starting symbol index for subslot-PUSCH transmission in case of semi-persistent scheduling with a configured periodicity of 1 subslot**

| <i>DMRS-pattern</i> field in uplink-related DCI format [3] | Uplink subslot number |    |    |    |    |    |
|------------------------------------------------------------|-----------------------|----|----|----|----|----|
|                                                            | #0                    | #1 | #2 | #3 | #4 | #5 |
| 00                                                         | 1                     | 4  | 6  | 1  | 3  | 5  |
| 10                                                         | 1                     | 3  | 6  | 0  | 3  | 5  |

In case of subslot-PUSCH and semi-persistent scheduling with a configured periodicity longer than 1 subslot the mapping shall start at symbol  $l$  according to the first row of Table 5.3.4-2 (i.e. equivalent to a signalling of *DMRS-pattern* field set to '00').

For the UpPTS, the mapping shall start at symbol  $l = 1$  and if *dmrsLess-UpPts* is set to true the mapping shall end at symbol  $l = \text{symPUSCH\_UpPts}$  in the second slot of a special subframe, otherwise, the mapping shall end at symbol  $l = \text{symPUSCH\_UpPts} + 1$  in the second slot of a special subframe.

For BL/CE UEs, the PUSCH transmission is restricted as follows:

- For CEModeA, if the PUSCH is associated with C-RNTI or SPS C-RNTI and the higher layer parameter *ce-pusch-maxBandwidth-config* is set to 5 MHz, the maximum number of allocatable PRBs for PUSCH is 24 PRBs. The allocatable PRBs include the PRBs belonging to the narrowbands defined in clause 5.2.4 and the odd PRB at the center of the uplink system bandwidth in case of odd total number of uplink PRBs. If a resource assignment or frequency hopping would result in a PUSCH resource allocation outside the allocatable PRBs then the PUSCH transmission in that subframe is dropped.
- For all other cases, the maximum number of allocatable PRBs for PUSCH is 6 PRBs restricted to one of the narrowbands defined in clause 5.2.4.

For BL/CE UEs in CEModeB, resource elements in the last SC-FDMA symbol in a subframe configured with cell-specific SRS shall be counted in the PUSCH mapping but not used for transmission of the PUSCH.

For BL/CE UEs, if one or more SC-FDMA symbol(s) are left empty due to guard period for narrowband or wideband retuning, the affected SC-FDMA symbol(s) shall be counted in the PUSCH mapping but not used for transmission of the PUSCH.

For a UE configured with SRS carrier switching, if the first symbol in a subframe overlaps with an SRS transmission (including any interruption due to uplink or downlink RF retuning time) in a carrier without PUSCH/PUCCH, the resource elements in the first SC-FDMA symbol shall be counted in the PUSCH mapping but not used for transmission of PUSCH.

For a UE configured with SRS carrier switching, if the last symbol in a subframe is counted in the PUSCH mapping and the last symbol in the subframe overlaps with an SRS transmission (including any interruption due to uplink or downlink RF retuning time) in a carrier without PUSCH/PUCCH, the resource elements in the last SC-FDMA symbol shall be counted in the PUSCH mapping but not used for transmission of PUSCH.

For a UE configured with SRS carrier switching, if the last symbol in a subframe is not counted in the PUSCH mapping and the second-to-last symbol in the subframe overlaps with an SRS transmission (including any interruption due to uplink or downlink RF retuning time) in a carrier without PUSCH/PUCCH, the resource elements in the second-to-last SC-FDMA symbol shall be counted in the PUSCH mapping but not used for transmission of PUSCH.

For a UE configured with PUSCH Mode 1, if DCI indicates PUSCH mode 1 enabled and the corresponding transmission of PUSCH starts in the second slot of a subframe, the resource elements in the first slot of the subframe shall be counted in the PUSCH mapping but not used for transmission of PUSCH.

For a UE configured with autonomous uplink,

- if the UE indicates PUSCH ending symbol '1' in uplink control information, or *endingSymbolAUL* is set to '12', the resource elements in the last SC-FDMA symbol shall be counted in the PUSCH mapping but not used for transmission of PUSCH;
- if the UE indicates PUSCH starting symbol '1' in uplink control information, the resource elements in the first SC-FDMA symbol shall be counted in the PUSCH mapping but not used for transmission of PUSCH.

If uplink frequency-hopping is disabled or the resource blocks allocated for PUSCH transmission are not contiguous in frequency, the set of physical resource blocks to be used for transmission is given by  $n_{\text{PRB}} = n_{\text{VRB}}$  where  $n_{\text{VRB}}$  is obtained from the uplink scheduling grant as described in clause 8.1 in TS 36.213 [4].

If uplink frequency-hopping with type 1 PUSCH hopping is enabled, the set of physical resource blocks to be used for transmission is given by clause 8.4.1 in TS 36.213 [4].

If uplink frequency-hopping with predefined hopping pattern is enabled, the set of physical resource blocks to be used for transmission in slot  $n_s$  is given by the scheduling grant together with a predefined pattern according to

$$\begin{aligned}\tilde{n}_{\text{PRB}}(n_s) &= (\tilde{n}_{\text{VRB}} + f_{\text{hop}}(i) \cdot N_{\text{RB}}^{\text{sb}} + ((N_{\text{RB}}^{\text{sb}} - 1) - 2(\tilde{n}_{\text{VRB}} \bmod N_{\text{RB}}^{\text{sb}})) \cdot f_m(i)) \bmod (N_{\text{RB}}^{\text{sb}} \cdot N_{\text{sb}}) \\ i &= \begin{cases} \lfloor n_s/2 \rfloor & \text{inter-subframe hopping} \\ n_s & \text{intra and inter-subframe hopping} \end{cases} \\ n_{\text{PRB}}(n_s) &= \begin{cases} \tilde{n}_{\text{PRB}}(n_s) & N_{\text{sb}} = 1 \\ \tilde{n}_{\text{PRB}}(n_s) + \lfloor N_{\text{RB}}^{\text{HO}}/2 \rfloor & N_{\text{sb}} > 1 \end{cases} \\ \tilde{n}_{\text{VRB}} &= \begin{cases} n_{\text{VRB}} & N_{\text{sb}} = 1 \\ n_{\text{VRB}} - \lfloor N_{\text{RB}}^{\text{HO}}/2 \rfloor & N_{\text{sb}} > 1 \end{cases}\end{aligned}$$

where  $n_{\text{VRB}}$  is obtained from the scheduling grant as described in clause 8.1 in TS 36.213 [4]. The parameter *pusch-HoppingOffset*,  $N_{\text{RB}}^{\text{HO}}$ , is provided by higher layers. The size  $N_{\text{RB}}^{\text{sb}}$  of each sub-band is given by,

$$N_{\text{RB}}^{\text{sb}} = \begin{cases} N_{\text{RB}}^{\text{UL}} & N_{\text{sb}} = 1 \\ \lfloor (N_{\text{RB}}^{\text{UL}} - N_{\text{RB}}^{\text{HO}} - N_{\text{RB}}^{\text{HO}} \bmod 2) / N_{\text{sb}} \rfloor & N_{\text{sb}} > 1 \end{cases}$$

where the number of sub-bands  $N_{\text{sb}}$  is given by higher layers. The function  $f_m(i) \in \{0,1\}$  determines whether mirroring is used or not. The parameter *Hopping-mode* provided by higher layers determines if hopping is "inter-subframe" or "intra and inter-subframe".

The hopping function  $f_{\text{hop}}(i)$  and the function  $f_m(i)$  are given by

$$\begin{aligned}f_{\text{hop}}(i) &= \begin{cases} 0 & N_{\text{sb}} = 1 \\ (f_{\text{hop}}(i-1) + \sum_{k=i-10+1}^{i-10+9} c(k) \times 2^{k-(i-10+1)}) \bmod N_{\text{sb}} & N_{\text{sb}} = 2 \\ (f_{\text{hop}}(i-1) + \left( \sum_{k=i-10+1}^{i-10+9} c(k) \times 2^{k-(i-10+1)} \right) \bmod (N_{\text{sb}} - 1) + 1) \bmod N_{\text{sb}} & N_{\text{sb}} > 2 \end{cases} \\ f_m(i) &= \begin{cases} i \bmod 2 & N_{\text{sb}} = 1 \text{ and intra and inter-subframe hopping} \\ \text{CURRENT\_TX\_NB} \bmod 2 & N_{\text{sb}} = 1 \text{ and inter-subframe hopping} \\ c(i \cdot 10) & N_{\text{sb}} > 1 \end{cases}\end{aligned}$$

where  $f_{\text{hop}}(-1) = 0$  and the pseudo-random sequence  $c(i)$  is given by clause 7.2 and CURRENT\_TX\_NB indicates the transmission number for the transport block transmitted in slot  $n_s$  as defined in [8]. The pseudo-random sequence generator shall be initialised with  $c_{\text{init}} = N_{\text{ID}}^{\text{cell}}$  for frame structure type 1 and  $c_{\text{init}} = 2^9 \cdot (n_f \bmod 4) + N_{\text{ID}}^{\text{cell}}$  for frame structure type 2 at the start of each frame.

For BL/CE UEs, the PRB resources for PUSCH transmission in the first subframe are obtained from the DCI as described in clauses 5.3.3.1.10 and 5.3.3.1.11 in [3], or from higher layers in *PUR-Config* when PUSCH is transmitted using preconfigured uplink resources. Each of the  $N_{\text{TB}} \geq 1$  PUSCH codewords is transmitted with  $N_{\text{rep}}^{\text{PUSCH}} \geq 1$  repetitions, where  $N_{\text{TB}}$  is the number of transport blocks defined in clause 8.0 of TS 36.213 [4]. The PUSCH

transmission spans  $N_{abs}^{PUSCH} \geq N_{TB} N_{rep}^{PUSCH}$  consecutive subframes, including subframes that are not BL/CE UL subframes where the UE postpones the PUSCH transmission if  $N_{rep}^{PUSCH} > 1$ .

- If uplink resource reservation is enabled for the UE as specified in [9], and the Resource reservation field in the DCI is set to 1, then in case of PUSCH transmission with  $N_{rep}^{PUSCH} > 1$  associated with C-RNTI or SPS C-RNTI using UE-specific MPDCCH search space including PUSCH transmission without a corresponding MPDCCH,
- In a subframe that is fully reserved as defined in clause 8.0 in [4], the PUSCH transmission is postponed until the next BL/CE uplink subframe that is not fully reserved.
- In a subframe that is partially reserved, the reserved SC-FDMA symbols shall be counted in the PUSCH mapping but not used for transmission of the PUSCH.
- In case the UE is a BL/CE UE configured with higher layer parameter *ce-PUSCH-SubPRB-Config-r15* or *subPRB-Allocation* in *PUR-PUSCH-Config*, the PUSCH transmission spans  $N_{abs}^{PUSCH} \geq N_{TB} N_{rep}^{PUSCH} M_{RU} M_{slots}^{UL} / 2$  consecutive subframes including subframes that are not BL/CE UL subframes where the UE postpones the PUSCH transmission, where  $N_{TB}$  is the number of scheduled TBs if *ce-PUSCH-MultiTB-Config* is enabled and multiple TBs are scheduled, otherwise  $N_{TB} = 1$ .
- For BL/CE UE in CEModeA,
  - If PUSCH is transmitted using preconfigured uplink resources,
    - PUSCH frequency hopping is enabled when the higher layer parameter *pur-PUSCH-FreqHopping* is set, otherwise frequency hopping is disabled.
  - Else, if PUSCH scheduled by DCI format 6-0A is associated with PUR-RNTI,
    - PUSCH frequency hopping is enabled when the higher layer parameter *pur-PUSCH-FreqHopping* is set and the frequency hopping flag in DCI format 6-0A indicates frequency hopping, otherwise frequency hopping is disabled.
  - Else,
    - PUSCH frequency hopping is enabled when the higher-layer parameter *pusch-HoppingConfig* is set and the frequency hopping flag in DCI format 6-0A indicates frequency hopping, otherwise frequency hopping is disabled.
- For BL/CE UE in CEModeB,
  - If PUSCH is transmitted using preconfigured uplink resources,
    - PUSCH frequency hopping is enabled when the higher layer parameter *pur-PUSCH-FreqHopping* is set, otherwise frequency hopping is disabled.
  - Else, if PUSCH scheduled by DCI format 6-0B is associated with PUR-RNTI,
    - PUSCH frequency hopping is enabled when the higher layer parameter *pur-PUSCH-FreqHopping* is set, otherwise frequency hopping is disabled.
  - Else,
    - PUSCH frequency hopping is enabled when the higher-layer parameter *pusch-HoppingConfig* is set, otherwise frequency hopping is disabled.
- If frequency hopping is not enabled for PUSCH, all PUSCH repetitions are located at the same PRB resources.
- If a BL/CE UE is configured with higher layer parameter *ce-PUSCH-FlexibleStartPRB-AllocConfig*, the UE is not expected to have the frequency hopping enabled for PUSCH with the resource allocation including the center PRB not belonging to any narrowband.
- If frequency hopping is enabled for PUSCH and the UE is not configured with CEModeA and higher layer parameter *ce-PUSCH-FlexibleStartPRB-AllocConfig*,

- PUSCH is transmitted in uplink subframe  $i$  within the  $N_{\text{abs}}^{\text{PUSCH}}$  consecutive subframes using the same number of consecutive PRBs as in the previous subframe starting from the PRB resources of the narrowband  $n_{\text{NB}}^{(i)}$  with the same RIV as that of narrowband  $n_{\text{NB}}^{(i_0)}$ . The narrowband  $n_{\text{NB}}^{(i)}$  is defined as

$$n_{\text{NB}}^{(i)} = \begin{cases} n_{\text{NB}}^{(i_0)} & \text{if } \left\lfloor i/N_{\text{NB}}^{\text{ch,UL}} - j_0 \right\rfloor \bmod 2 = 0 \\ \left( n_{\text{NB}}^{(i_0)} + f_{\text{NB,hop}}^{\text{PUSCH}} \right) \bmod N_{\text{NB}}^{\text{UL}} & \text{if } \left\lfloor i/N_{\text{NB}}^{\text{ch,UL}} - j_0 \right\rfloor \bmod 2 = 1 \end{cases}$$

$$j_0 = \left\lfloor i_0 / N_{\text{NB}}^{\text{ch,UL}} \right\rfloor$$

$$i_0 \leq i \leq i_0 + N_{\text{abs}}^{\text{PUSCH}} - 1$$

where  $i_0$  is the absolute subframe number of the first UL subframe intended for carrying the PUSCH and  $N_{\text{NB}}^{\text{ch,UL}}$  and  $f_{\text{NB,hop}}^{\text{PUSCH}}$  are cell-specific higher-layer parameters. For the  $N_{\text{abs}}^{\text{PUSCH}}$  consecutive subframes, the UE shall not transmit PUSCH in subframe  $i$  if it is not a BL/CE UL subframe.

- If frequency hopping is enabled for PUSCH and the UE is configured with CEModeA and higher layer parameter *ce-PUSCH-FlexibleStartPRB-AllocConfig*,
  - Except when the PUSCH resource allocation includes the center PRB not belonging to any narrowband, PUSCH is transmitted in uplink subframe  $i$  within the  $N_{\text{abs}}^{\text{PUSCH}}$  consecutive subframes using the same number of consecutive PRBs as in the previous subframe, where  $n_{\text{NB}}^{(i_0)}$  is the narrowband index that starting PRB located in the absolute subframe number of the first UL subframe  $i_0$ , defined as
    - If  $N_{\text{RB}}^{\text{UL}} \bmod 2 = 0$  or  $N_{\text{RB}}^{\text{UL}} \bmod 2 = 1$  with  $RB_{\text{START}} < \left\lfloor N_{\text{RB}}^{\text{UL}} / 2 \right\rfloor$ ,  $n_{\text{NB}}^{(i_0)} = \left\lfloor \frac{RB_{\text{START}} - l_e}{6} \right\rfloor$
    - If  $N_{\text{RB}}^{\text{UL}} \bmod 2 = 1$  with  $RB_{\text{START}} > \left\lfloor N_{\text{RB}}^{\text{UL}} / 2 \right\rfloor$ ,  $n_{\text{NB}}^{(i_0)} = \left\lfloor \frac{RB_{\text{START}} - l_e - 1}{6} \right\rfloor$

where  $l_e = \left\lfloor \frac{N_{\text{RB}}^{\text{UL}}}{2} \right\rfloor - \frac{6N_{\text{NB}}^{\text{UL}}}{2}$  is the number of edge PRB(s) not belonging to narrowbands in one side of system bandwidth  $N_{\text{RB}}^{\text{UL}}$ ,  $N_{\text{NB}}^{\text{UL}}$  is the number of narrowbands, the starting PRB index  $RB_{\text{START}}$  and the length  $L_{\text{CRBS}}$  of the allocated resources are defined in clause 8.1.1 of [4]. After hopping, the narrowband  $n_{\text{NB}}^{(i)}$  in subframe  $i$  is defined as

$$n_{\text{NB}}^{(i)} = \begin{cases} n_{\text{NB}}^{(i_0)} & \text{if } \left\lfloor i/N_{\text{NB}}^{\text{ch,UL}} - j_0 \right\rfloor \bmod 2 = 0 \\ \left( n_{\text{NB}}^{(i_0)} + f_{\text{NB,hop}}^{\text{PUSCH}} \right) \bmod N_{\text{NB}}^{\text{UL}} & \text{if } \left\lfloor i/N_{\text{NB}}^{\text{ch,UL}} - j_0 \right\rfloor \bmod 2 = 1 \end{cases}$$

$$j_0 = \left\lfloor i_0 / N_{\text{NB}}^{\text{ch,UL}} \right\rfloor$$

$$i_0 \leq i \leq i_0 + N_{\text{abs}}^{\text{PUSCH}} - 1$$

where  $N_{\text{NB}}^{\text{ch,UL}}$  and  $f_{\text{NB,hop}}^{\text{PUSCH}}$  are cell-specific higher-layer parameters. For the  $N_{\text{abs}}^{\text{PUSCH}}$  consecutive subframes, the UE shall not transmit PUSCH in subframe  $i$  if it is not a BL/CE UL subframe. After hopping, the resource blocks have the same relative location of starting PRB in  $n_{\text{NB}}^{(i)}$  as in narrowband  $n_{\text{NB}}^{(i_0)}$ .

- If frequency hopping is enabled for PUSCH and the UE is configured with higher layer parameter *ce-PUSCH-FlexibleStartPRB-AllocConfig*,
  - If a frequency hopping leads to a split resource allocation, where some PRB(s) is (are) on one edge and some PRB(s) is (are) on the other edge of the system bandwidth, the PUSCH transmission is dropped in that subframe.
  - If a frequency hopping leads to a resource allocation, where some PRB(s) is (are) not belonging to any narrowband, the PUSCH transmission is dropped in that subframe.

For BL/CE UEs, for PUSCH transmission corresponding to the random access response grant and its retransmission, frequency hopping of the PUSCH is enabled when higher layer parameter *rar-HoppingConfig* is set. Further

- if PRACH CE level 0 or 1 is used for the last PRACH attempt,  $N_{\text{NB}}^{\text{ch,UL}}$  is set to the higher layer parameter *interval-ULHoppingConfigCommonModeA*;

- if PRACH CE level 2 or 3 is used for the last PRACH attempt,  $N_{NB}^{ch,UL}$  is set to the higher layer parameter *interval-ULHoppingConfigCommonModeB*.

For BL/CE UEs in CEModeB, for PUSCH transmission not associated with Temporary C-RNTI, for frame structure type 1, after a transmission duration of  $256 \cdot 30720T_s$  time units (which may include subframes that are not BL/CE UL subframes), a gap of  $40 \cdot 30720T_s$  time units shall be inserted, according to the UE capability *ue-CE-NeedULGaps*, as specified in TS 36.331 [9]. BL/CE UL subframes within the gap of  $40 \cdot 30720T_s$  time units shall be counted for the PUSCH resource mapping but not used for transmission of the PUSCH.

For BL/CE UEs, for PUSCH transmission associated with Temporary C-RNTI for frame structure type 1, and if PRACH CE level 2 or 3 is used for the last PRACH attempt, after a transmission duration of  $256 \cdot 30720T_s$  time units (which may include subframes that are not BL/CE UL subframes), a gap of  $40 \cdot 30720T_s$  time units shall be inserted. BL/CE UL subframes within the gap of  $40 \cdot 30720T_s$  time units shall be counted for the PUSCH resource mapping but not used for transmission of the PUSCH.

For UEs configured with *PUSCH-EnhancementsConfig*, the number of PUSCH subframe repetitions  $N_{rep}^{PUSCH}$  and the PRB resources for PUSCH transmission in the first subframe are obtained from the DCI as described in clause 5.3.3.1.1C in [3]. The PUSCH transmission spans  $N_{abs}^{PUSCH} \geq N_{rep}^{PUSCH}$  consecutive subframes, including DL subframes where the UE postpones the PUSCH transmission in the case of frame structure type 2. PUSCH frequency hopping is enabled when the higher-layer parameters *pusch-HoppingOffsetPUSCH-Enh* and *interval-ULHoppingPUSCH-Enh* are set and the frequency hopping flag in DCI format 0C indicates frequency hopping, otherwise frequency hopping is disabled. If frequency hopping is not enabled for PUSCH, the PUSCH repetitions are located at the same PRB resources as in the first subframe. If frequency hopping is enabled for PUSCH, PUSCH is transmitted in uplink subframe  $i$  within the  $N_{rep}^{PUSCH}$  consecutive subframes using the PRB resources starting at PRB index  $n_{PRB}^{(i)}$

$$n_{PRB}^{(i)} = \begin{cases} n_{PRB}^{(i_0)} & \text{if } \left\lfloor \frac{i}{N_{PRB,hop}^{PUSCH}} - j_0 \right\rfloor \bmod 2 = 0 \\ \left( n_{PRB}^{(i_0)} + f_{PRB,hop}^{PUSCH} \right) \bmod N_{PRB}^{UL} & \text{if } \left\lfloor \frac{i}{N_{PRB,hop}^{PUSCH}} - j_0 \right\rfloor \bmod 2 = 1 \end{cases}$$

$$j_0 = \left\lfloor \frac{i_0}{N_{PRB,hop}^{PUSCH}} \right\rfloor, i_0 \leq i \leq i_0 + N_{abs}^{PUSCH} - 1$$

where  $i_0$  is the absolute subframe number of the first UL subframe carrying the PUSCH and  $N_{PRB,hop}^{PUSCH}$  is given by the higher-layer parameter *interval-ULHoppingPUSCH-Enh* and  $f_{PRB,hop}^{PUSCH}$  is given by the higher-layer parameter *pusch-HoppingOffsetPUSCH-Enh*.

For BL/CE UEs communicating over NTN, for PUSCH transmission, for frame structure type 1, after a transmission duration of  $N_{segment}^{precompensation}$  time units (which may include subframes that are not BL/CE UL subframes), a transmission gap of  $N_{gap}^{precompensation}$  time units shall be counted for the PUSCH resource mapping but not used for transmission of the PUSCH, according to the single UE capability *ntn-SegmentedPrecompensationGaps-r17*, as specified in 3GPP TS 36.331 [9]. The quantity  $N_{segment}^{precompensation}$  is provided by higher layers, and the quantity  $N_{gap}^{precompensation}$  is configured by higher layers based on the UE capability, if signalled.

## 5.4 Physical uplink control channel

The physical uplink control channel, PUCCH, carries uplink control information. Simultaneous transmission of PUCCH and PUSCH from the same UE is supported if enabled by higher layers. For frame structure type 2, the PUCCH is not transmitted in the UpPTS field.

The physical uplink control channel supports multiple formats as shown in Table 5.4-1 with different number of bits per subframe, where  $M_{RB}^{PUCCH4}$  represents the bandwidth of the PUCCH format 4 as defined by clause 5.4.2B, and  $N_0^{PUCCH}$  and  $N_1^{PUCCH}$  are defined in Table 5.4.2C-1.

Formats 2a and 2b are supported for normal cyclic prefix only.

**Table 5.4-1: Supported PUCCH formats**

| PUCCH format | Modulation scheme | Number of bits per subframe, $M_{\text{bit}}$                                                                           |
|--------------|-------------------|-------------------------------------------------------------------------------------------------------------------------|
| 1            | N/A               | N/A                                                                                                                     |
| 1a           | BPSK              | 1                                                                                                                       |
| 1b           | QPSK              | 2                                                                                                                       |
| 2            | QPSK              | 20                                                                                                                      |
| 2a           | QPSK+BPSK         | 21                                                                                                                      |
| 2b           | QPSK+QPSK         | 22                                                                                                                      |
| 3            | QPSK              | 48                                                                                                                      |
| 4            | QPSK              | $M_{\text{RB}}^{\text{PUCCH4}} \cdot N_{\text{sc}}^{\text{RB}} \cdot (N_0^{\text{PUCCH}} + N_1^{\text{PUCCH}}) \cdot 2$ |
| 5            | QPSK              | $N_{\text{sc}}^{\text{RB}} \cdot (N_0^{\text{PUCCH}} + N_1^{\text{PUCCH}})$                                             |

All PUCCH formats use a cyclic shift,  $n_{\text{cs}}^{\text{cell}}(n_s, l)$ , which varies with the symbol number  $l$  and the slot number  $n_s$  according to

$$n_{\text{cs}}^{\text{cell}}(n_s, l) = \sum_{i=0}^7 c(8N_{\text{symb}}^{\text{UL}} \cdot n_s + 8l + i) \cdot 2^i$$

where the pseudo-random sequence  $c(i)$  is defined by clause 7.2. The pseudo-random sequence generator shall be initialized with  $c_{\text{init}} = n_{\text{ID}}^{\text{RS}}$ , where  $n_{\text{ID}}^{\text{RS}}$  is given by clause 5.5.1.5 with  $N_{\text{ID}}^{\text{cell}}$  corresponding to the primary cell, at the beginning of each radio frame.

The physical resources used for PUCCH format 1/1a/1b and PUCCH format 2/2a/2b depends on two parameters,  $N_{\text{RB}}^{(2)}$  and  $N_{\text{cs}}^{(1)}$ , given by higher layers.

The variable  $N_{\text{RB}}^{(2)} \geq 0$  denotes the bandwidth in terms of resource blocks that are available for use by PUCCH formats 2/2a/2b transmission in each slot. The variable  $N_{\text{cs}}^{(1)}$  denotes the number of cyclic shift used for PUCCH formats 1/1a/1b in a resource block used for a mix of formats 1/1a/1b and 2/2a/2b. The value of  $N_{\text{cs}}^{(1)}$  is an integer multiple of  $\Delta_{\text{shift}}^{\text{PUCCH}}$  within the range of  $\{0, 1, \dots, 7\}$ , where  $\Delta_{\text{shift}}^{\text{PUCCH}}$  is provided by higher layers. No mixed resource block is present if  $N_{\text{cs}}^{(1)} = 0$ . At most one resource block in each slot supports a mix of formats 1/1a/1b and 2/2a/2b.

Resources used for transmission of PUCCH formats 1/1a/1b, 2/2a/2b, 3, 4, and 5 are represented by the non-negative

indices  $n_{\text{PUCCH}}^{(1, \tilde{p})}$ ,  $n_{\text{PUCCH}}^{(2, \tilde{p})} < N_{\text{RB}}^{(2)} N_{\text{sc}}^{\text{RB}} + \left\lceil \frac{N_{\text{cs}}^{(1)}}{8} \right\rceil \cdot (N_{\text{sc}}^{\text{RB}} - N_{\text{cs}}^{(1)} - 2)$ ,  $n_{\text{PUCCH}}^{(3, \tilde{p})}$ ,  $n_{\text{PUCCH}}^{(4)}$  and  $n_{\text{PUCCH}}^{(5)}$ , respectively.

### 5.4.1 PUCCH formats 1, 1a and 1b

For PUCCH format 1, information is carried by the presence/absence of transmission of PUCCH from the UE. In the remainder of this clause,  $d(0) = 1$  shall be assumed for PUCCH format 1.

For PUCCH formats 1a and 1b, one or two explicit bits are transmitted, respectively. The block of bits  $b(0), \dots, b(M_{\text{bit}} - 1)$  shall be modulated as described in Table 5.4.1-1, resulting in a complex-valued symbol  $d(0)$ . The modulation schemes for the different PUCCH formats are given by Table 5.4-1.

The complex-valued symbol  $d(0)$  shall be multiplied with a cyclically shifted length  $N_{\text{seq}}^{\text{PUCCH}} = 12$  sequence  $r_{u,v}^{(\alpha_{\tilde{p}})}(n)$  for each of the  $P$  antenna ports used for PUCCH transmission according to

$$y^{(\tilde{p}, \delta)}(n) = \frac{1}{\sqrt{P}} d(0) \cdot r_{u,v}^{(\alpha_{\tilde{p}}, \delta)}(n), \quad n = 0, 1, \dots, N_{\text{seq}}^{\text{PUCCH}} - 1$$

where  $r_{u,v}^{(\alpha_{\tilde{p}}, \delta)}(n)$  is defined by clause 5.5.1 with  $M_{\text{sc}}^{\text{RS}} = N_{\text{seq}}^{\text{PUCCH}}$  and  $\delta = 0$ . The antenna-port specific cyclic shift  $\alpha_{\tilde{p}}$  varies between symbols and slots as defined below.

The block of complex-valued symbols  $y^{(\tilde{p})}(0), \dots, y^{(\tilde{p})}(N_{\text{seq}}^{\text{PUCCH}} - 1)$  shall be scrambled by  $S(n_s)$  and block-wise spread with the antenna-port specific orthogonal sequence  $w_{n_{\text{oc}}^{(\tilde{p})}}(i)$  according to

$$z^{(\tilde{p})}(m' \cdot N_{\text{SF}}^{\text{PUCCH}} \cdot N_{\text{seq}}^{\text{PUCCH}} + m \cdot N_{\text{seq}}^{\text{PUCCH}} + n) = S(n_s) \cdot w_{n_{\text{oc}}^{(\tilde{p})}}(m) \cdot y^{(\tilde{p})}(n)$$

where

$$\begin{aligned} m &= 0, \dots, N_{\text{SF}}^{\text{PUCCH}} - 1 \\ n &= 0, \dots, N_{\text{seq}}^{\text{PUCCH}} - 1 \\ m' &= 0, 1 \end{aligned}$$

and

$$S(n_s) = \begin{cases} 1 & \text{if } n_{\tilde{p}}'(n_s) \bmod 2 = 0 \\ e^{j\pi/2} & \text{otherwise} \end{cases}$$

with  $N_{\text{SF}}^{\text{PUCCH}}$  for the two slots in a subframe given by Table 5.4.1-1a. The sequence  $w_{n_{\text{oc}}^{(\tilde{p})}}(i)$  is given by Table 5.4.1-2 and Table 5.4.1-3 and  $n_{\tilde{p}}'(n_s)$  is defined below.

Resources used for transmission of PUCCH format 1, 1a and 1b are identified by a resource index  $n_{\text{PUCCH}}^{(1, \tilde{p})}$  from which the orthogonal sequence index  $n_{\text{oc}}^{(\tilde{p})}(n_s)$  and the cyclic shift  $\alpha_{\tilde{p}}(n_s, l)$  are determined according to

$$n_{\text{oc}}^{(\tilde{p})}(n_s) = \begin{cases} \left\lfloor n_{\tilde{p}}'(n_s) \cdot \Delta_{\text{shift}}^{\text{PUCCH}} / N' \right\rfloor & \text{for normal cyclic prefix} \\ 2 \cdot \left\lfloor n_{\tilde{p}}'(n_s) \cdot \Delta_{\text{shift}}^{\text{PUCCH}} / N' \right\rfloor & \text{for extended cyclic prefix} \end{cases}$$

$$\alpha_{\tilde{p}}(n_s, l) = 2\pi \cdot n_{\text{cs}}^{(\tilde{p})}(n_s, l) / N_{\text{sc}}^{\text{RB}}$$

$$n_{\text{cs}}^{(\tilde{p})}(n_s, l) = \begin{cases} \left[ n_{\text{cs}}^{\text{cell}}(n_s, l) + (n_{\tilde{p}}'(n_s) \cdot \Delta_{\text{shift}}^{\text{PUCCH}} + (n_{\text{oc}}^{(\tilde{p})}(n_s) \bmod \Delta_{\text{shift}}^{\text{PUCCH}})) \bmod N' \right] \bmod N_{\text{sc}}^{\text{RB}} & \text{for normal cyclic prefix} \\ \left[ n_{\text{cs}}^{\text{cell}}(n_s, l) + (n_{\tilde{p}}'(n_s) \cdot \Delta_{\text{shift}}^{\text{PUCCH}} + n_{\text{oc}}^{(\tilde{p})}(n_s) / 2) \bmod N' \right] \bmod N_{\text{sc}}^{\text{RB}} & \text{for extended cyclic prefix} \end{cases}$$

where

$$\begin{aligned} N' &= \begin{cases} N_{\text{cs}}^{(1)} & \text{if } n_{\text{PUCCH}}^{(1, \tilde{p})} < c \cdot N_{\text{cs}}^{(1)} / \Delta_{\text{shift}}^{\text{PUCCH}} \\ N_{\text{sc}}^{\text{RB}} & \text{otherwise} \end{cases} \\ c &= \begin{cases} 3 & \text{normal cyclic prefix} \\ 2 & \text{extended cyclic prefix} \end{cases} \end{aligned}$$

The resource indices within the two resource blocks in the two slots of a subframe to which the PUCCH is mapped are given by

$$n_{\tilde{p}}'(n_s) = \begin{cases} n_{\text{PUCCH}}^{(1, \tilde{p})} & \text{if } n_{\text{PUCCH}}^{(1, \tilde{p})} < c \cdot N_{\text{cs}}^{(1)} / \Delta_{\text{shift}}^{\text{PUCCH}} \\ (n_{\text{PUCCH}}^{(1, \tilde{p})} - c \cdot N_{\text{cs}}^{(1)} / \Delta_{\text{shift}}^{\text{PUCCH}}) \bmod (c \cdot N_{\text{sc}}^{\text{RB}} / \Delta_{\text{shift}}^{\text{PUCCH}}) & \text{otherwise} \end{cases}$$

for  $n_s \bmod 2 = 0$  and by

$$n_{\tilde{p}}'(n_s) = \begin{cases} \left[ c(n_{\tilde{p}}'(n_s - 1) + 1) \right] \bmod (cN_{\text{sc}}^{\text{RB}} / \Delta_{\text{shift}}^{\text{PUCCH}} + 1) - 1 & n_{\text{PUCCH}}^{(1, \tilde{p})} \geq c \cdot N_{\text{cs}}^{(1)} / \Delta_{\text{shift}}^{\text{PUCCH}} \\ \left\lfloor h_{\tilde{p}} / c \right\rfloor + (h_{\tilde{p}} \bmod c) N' / \Delta_{\text{shift}}^{\text{PUCCH}} & \text{otherwise} \end{cases}$$

for  $n_s \bmod 2 = 1$ , where  $h_{\tilde{p}} = (n_{\tilde{p}}'(n_s - 1) + d) \bmod (cN' / \Delta_{\text{shift}}^{\text{PUCCH}})$ , with  $d = 2$  for normal CP and  $d = 0$  for extended CP.

The parameter *deltaPUCCH-Shift*  $\Delta_{\text{shift}}^{\text{PUCCH}}$  is provided by higher layers.

**Table 5.4.1-1: Modulation symbol  $d(0)$  for PUCCH formats 1a and 1b**

| PUCCH format | $b(0), \dots, b(M_{\text{bit}} - 1)$ | $d(0)$ |
|--------------|--------------------------------------|--------|
| 1a           | 0                                    | 1      |
|              | 1                                    | -1     |
| 1b           | 00                                   | 1      |
|              | 01                                   | $-j$   |
|              | 10                                   | $j$    |
|              | 11                                   | -1     |

**Table 5.4.1-1a: The quantity  $N_{\text{SF}}^{\text{PUCCH}}$  for PUCCH formats 1a and 1b**

| PUCCH format      | $N_{\text{SF}}^{\text{PUCCH}}$ |             |
|-------------------|--------------------------------|-------------|
|                   | first slot                     | second slot |
| normal 1/1a/1b    | 4                              | 4           |
| shortened 1/1a/1b | 4                              | 3           |
|                   |                                |             |
|                   |                                |             |

**Table 5.4.1-2: Orthogonal sequences  $[w(0) \ \dots \ w(N_{\text{SF}}^{\text{PUCCH}} - 1)]$  for  $N_{\text{SF}}^{\text{PUCCH}} = 4$**

| Sequence index $n_{\text{oc}}^{(\tilde{p})}(n_s)$ | Orthogonal sequences $[w(0) \ \dots \ w(N_{\text{SF}}^{\text{PUCCH}} - 1)]$ |
|---------------------------------------------------|-----------------------------------------------------------------------------|
| 0                                                 | $[+1 \ +1 \ +1 \ +1]$                                                       |
| 1                                                 | $[+1 \ -1 \ +1 \ -1]$                                                       |
| 2                                                 | $[+1 \ -1 \ -1 \ +1]$                                                       |

**Table 5.4.1-3: Orthogonal sequences  $[w(0) \ \dots \ w(N_{\text{SF}}^{\text{PUCCH}} - 1)]$  for  $N_{\text{SF}}^{\text{PUCCH}} = 3$**

| Sequence index $n_{\text{oc}}^{(\tilde{p})}(n_s)$ | Orthogonal sequences $[w(0) \ \dots \ w(N_{\text{SF}}^{\text{PUCCH}} - 1)]$ |
|---------------------------------------------------|-----------------------------------------------------------------------------|
| 0                                                 | $[1 \ 1 \ 1]$                                                               |
| 1                                                 | $[1 \ e^{j2\pi/3} \ e^{j4\pi/3}]$                                           |
| 2                                                 | $[1 \ e^{j4\pi/3} \ e^{j2\pi/3}]$                                           |

### 5.4.2 PUCCH formats 2, 2a and 2b

The block of bits  $b(0), \dots, b(19)$  shall be scrambled with a UE-specific scrambling sequence, resulting in a block of scrambled bits  $\tilde{b}(0), \dots, \tilde{b}(19)$  according to

$$\tilde{b}(i) = (b(i) + c(i)) \bmod 2$$

where the scrambling sequence  $c(i)$  is given by clause 7.2. The scrambling sequence generator shall be initialised with  $c_{\text{init}} = (\lfloor n_s/2 \rfloor + 1) \cdot (2N_{\text{ID}}^{\text{cell}} + 1) \cdot 2^{16} + n_{\text{RNTI}}$  at the start of each subframe where  $n_{\text{RNTI}}$  is C-RNTI.

The block of scrambled bits  $\tilde{b}(0), \dots, \tilde{b}(19)$  shall be QPSK modulated as described in clause 7.1, resulting in a block of complex-valued modulation symbols  $d(0), \dots, d(9)$ .

Each complex-valued symbol  $d(0), \dots, d(9)$  shall be multiplied with a cyclically shifted length  $N_{\text{seq}}^{\text{PUCCH}} = 12$  sequence  $r_{u,v}^{(\alpha_{\tilde{p}}, \delta)}(n)$  for each of the  $P$  antenna ports used for PUCCH transmission according to

$$z^{(\tilde{p})}(N_{\text{seq}}^{\text{PUCCH}} \cdot n + i) = \frac{1}{\sqrt{P}} d(n) \cdot r_{u,v}^{(\alpha_{\tilde{p}}, \delta)}(i)$$

$$n = 0, 1, \dots, 9$$

$$i = 0, 1, \dots, N_{\text{sc}}^{\text{RB}} - 1$$

where  $r_{u,v}^{(\alpha_{\tilde{p}}, \delta)}(i)$  is defined by clause 5.5.1 with  $M_{\text{sc}}^{\text{RS}} = N_{\text{seq}}^{\text{PUCCH}}$  and  $\delta = 0$ .

Resources used for transmission of PUCCH formats 2/2a/2b are identified by a resource index  $n_{\text{PUCCH}}^{(2, \tilde{p})}$  from which the cyclic shift  $\alpha_{\tilde{p}}(n_s, l)$  is determined according to

$$\alpha_{\tilde{p}}(n_s, l) = 2\pi \cdot n_{\text{cs}}^{(\tilde{p})}(n_s, l) / N_{\text{sc}}^{\text{RB}}$$

where

$$n_{\text{cs}}^{(\tilde{p})}(n_s, l) = (n_{\text{cs}}^{\text{cell}}(n_s, l) + n'_{\tilde{p}}(n_s)) \bmod N_{\text{sc}}^{\text{RB}}$$

and

$$n'_{\tilde{p}}(n_s) = \begin{cases} n_{\text{PUCCH}}^{(2, \tilde{p})} \bmod N_{\text{sc}}^{\text{RB}} & \text{if } n_{\text{PUCCH}}^{(2, \tilde{p})} < N_{\text{sc}}^{\text{RB}} N_{\text{RB}}^{(2)} \\ (n_{\text{PUCCH}}^{(2, \tilde{p})} + N_{\text{cs}}^{(1)} + 1) \bmod N_{\text{sc}}^{\text{RB}} & \text{otherwise} \end{cases}$$

for  $n_s \bmod 2 = 0$  and by

$$n'_{\tilde{p}}(n_s) = \begin{cases} \left[ N_{\text{sc}}^{\text{RB}} (n'_{\tilde{p}}(n_s - 1) + 1) \right] \bmod (N_{\text{sc}}^{\text{RB}} + 1) - 1 & \text{if } n_{\text{PUCCH}}^{(2, \tilde{p})} < N_{\text{sc}}^{\text{RB}} N_{\text{RB}}^{(2)} \\ (N_{\text{sc}}^{\text{RB}} - 2 - n_{\text{PUCCH}}^{(2, \tilde{p})}) \bmod N_{\text{sc}}^{\text{RB}} & \text{otherwise} \end{cases}$$

for  $n_s \bmod 2 = 1$ .

For PUCCH formats 2a and 2b, supported for normal cyclic prefix only, the bit(s)  $b(20), \dots, b(M_{\text{bit}} - 1)$  shall be modulated as described in Table 5.4.2-1 resulting in a single modulation symbol  $d(10)$  used in the generation of the reference-signal for PUCCH format 2a and 2b as described in clause 5.5.2.2.1.

**Table 5.4.2-1: Modulation symbol  $d(10)$  for PUCCH formats 2a and 2b**

| PUCCH format | $b(20), \dots, b(M_{\text{bit}} - 1)$ | $d(10)$ |
|--------------|---------------------------------------|---------|
| 2a           | 0                                     | 1       |
|              | 1                                     | -1      |

|    |    |      |
|----|----|------|
| 2b | 00 | 1    |
|    | 01 | $-j$ |
|    | 10 | $j$  |
|    | 11 | $-1$ |

### 5.4.2A PUCCH format 3

The block of bits  $b(0), \dots, b(M_{\text{bit}} - 1)$  shall be scrambled with a UE-specific scrambling sequence, resulting in a block of scrambled bits  $\tilde{b}(0), \dots, \tilde{b}(M_{\text{bit}} - 1)$  according to

$$\tilde{b}(i) = (b(i) + c(i)) \bmod 2$$

where the scrambling sequence  $c(i)$  is given by clause 7.2. The scrambling sequence generator shall be initialised with  $c_{\text{init}} = (\lfloor n_s/2 \rfloor + 1) \cdot (2N_{\text{ID}}^{\text{cell}} + 1) \cdot 2^{16} + n_{\text{RNTI}}$  at the start of each subframe where  $n_{\text{RNTI}}$  is the C-RNTI.

The block of scrambled bits  $\tilde{b}(0), \dots, \tilde{b}(M_{\text{bit}} - 1)$  shall be QPSK modulated as described in Clause 7.1, resulting in a block of complex-valued modulation symbols  $d(0), \dots, d(M_{\text{symb}} - 1)$  where  $M_{\text{symb}} = M_{\text{bit}}/2 = 2N_{\text{sc}}^{\text{RB}}$ .

The complex-valued symbols  $d(0), \dots, d(M_{\text{symb}} - 1)$  shall be block-wise spread with the orthogonal sequences  $w_{n_{\text{oc},0}}^{(\tilde{p})}(i)$  and  $w_{n_{\text{oc},1}}^{(\tilde{p})}(i)$  resulting in  $N_{\text{SF},0}^{\text{PUCCH}} + N_{\text{SF},1}^{\text{PUCCH}}$  sets of  $N_{\text{sc}}^{\text{RB}}$  values each according to

$$y_n^{(\tilde{p})}(i) = \begin{cases} w_{n_{\text{oc},0}}^{(\tilde{p})}(\bar{n}) \cdot e^{j\pi \lfloor n_{\text{cs}}^{\text{cell}}(n_s, l)/64 \rfloor / 2} \cdot d(i) & n < N_{\text{SF},0}^{\text{PUCCH}} \\ w_{n_{\text{oc},1}}^{(\tilde{p})}(\bar{n}) \cdot e^{j\pi \lfloor n_{\text{cs}}^{\text{cell}}(n_s, l)/64 \rfloor / 2} \cdot d(N_{\text{sc}}^{\text{RB}} + i) & \text{otherwise} \end{cases}$$

$$\bar{n} = n \bmod N_{\text{SF},0}^{\text{PUCCH}}$$

$$n = 0, \dots, N_{\text{SF},0}^{\text{PUCCH}} + N_{\text{SF},1}^{\text{PUCCH}} - 1$$

$$i = 0, 1, \dots, N_{\text{sc}}^{\text{RB}} - 1$$

where  $N_{\text{SF},0}^{\text{PUCCH}} = N_{\text{SF},1}^{\text{PUCCH}} = 5$  for both slots in a subframe using normal PUCCH format 3 and  $N_{\text{SF},0}^{\text{PUCCH}} = 5$ ,

$N_{\text{SF},1}^{\text{PUCCH}} = 4$  holds for the first and second slot, respectively, in a subframe using shortened PUCCH format 3. The orthogonal sequences  $w_{n_{\text{oc},0}}^{(\tilde{p})}(i)$  and  $w_{n_{\text{oc},1}}^{(\tilde{p})}(i)$  are given by Table 5.4.2A-1. Resources used for transmission of PUCCH format 3 are identified by a resource index  $n_{\text{PUCCH}}^{(3, \tilde{p})}$  from which the quantities  $n_{\text{oc},0}^{(\tilde{p})}$  and  $n_{\text{oc},1}^{(\tilde{p})}$  are derived according to

$$n_{\text{oc},0}^{(\tilde{p})} = n_{\text{PUCCH}}^{(3, \tilde{p})} \bmod N_{\text{SF},1}^{\text{PUCCH}}$$

$$n_{\text{oc},1}^{(\tilde{p})} = \begin{cases} (3n_{\text{oc},0}^{(\tilde{p})}) \bmod N_{\text{SF},1}^{\text{PUCCH}} & \text{if } N_{\text{SF},1}^{\text{PUCCH}} = 5 \\ n_{\text{oc},0}^{(\tilde{p})} \bmod N_{\text{SF},1}^{\text{PUCCH}} & \text{otherwise} \end{cases}$$

Each set of complex-valued symbols shall be cyclically shifted according to

$$\tilde{y}_n^{(\tilde{p})}(i) = y_n^{(\tilde{p})}((i + n_{\text{cs}}^{\text{cell}}(n_s, l)) \bmod N_{\text{sc}}^{\text{RB}})$$

where  $n_{\text{cs}}^{\text{cell}}(n_s, l)$  is given by Clause 5.4,  $n_s$  is the slot number within a radio frame and  $l$  is the SC-FDMA symbol number within a slot.

The shifted sets of complex-valued symbols shall be transform precoded according to

$$z^{(\tilde{p})}(n \cdot N_{\text{sc}}^{\text{RB}} + k) = \frac{1}{\sqrt{P}} \frac{1}{\sqrt{N_{\text{sc}}^{\text{RB}}}} \sum_{i=0}^{N_{\text{sc}}^{\text{RB}}-1} \tilde{y}_n^{(\tilde{p})}(i) e^{-j \frac{2\pi i k}{N_{\text{sc}}^{\text{RB}}}}$$

$$k = 0, \dots, N_{\text{sc}}^{\text{RB}} - 1$$

$$n = 0, \dots, N_{\text{SF},0}^{\text{PUCCH}} + N_{\text{SF},1}^{\text{PUCCH}} - 1$$

where  $P$  is the number of antenna ports used for PUCCH transmission, resulting in a block of complex-valued symbols  $z^{(\tilde{p})}(0), \dots, z^{(\tilde{p})}\left((N_{\text{SF},0}^{\text{PUCCH}} + N_{\text{SF},1}^{\text{PUCCH}})N_{\text{sc}}^{\text{RB}} - 1\right)$ .

**Table 5.4.2A-1: The orthogonal sequence  $w_{n_{\text{oc}}}(i)$**

| Sequence index $n_{\text{oc}}$ | Orthogonal sequence $[w_{n_{\text{oc}}}(0) \ \dots \ w_{n_{\text{oc}}}(N_{\text{SF}}^{\text{PUCCH}} - 1)]$ |                                    |
|--------------------------------|------------------------------------------------------------------------------------------------------------|------------------------------------|
|                                | $N_{\text{SF}}^{\text{PUCCH}} = 5$                                                                         | $N_{\text{SF}}^{\text{PUCCH}} = 4$ |
| 0                              | $[1 \ 1 \ 1 \ 1 \ 1]$                                                                                      | $[+1 \ +1 \ +1 \ +1]$              |
| 1                              | $[1 \ e^{j2\pi/5} \ e^{j4\pi/5} \ e^{j6\pi/5} \ e^{j8\pi/5}]$                                              | $[+1 \ -1 \ +1 \ -1]$              |
| 2                              | $[1 \ e^{j4\pi/5} \ e^{j8\pi/5} \ e^{j2\pi/5} \ e^{j6\pi/5}]$                                              | $[+1 \ +1 \ -1 \ -1]$              |
| 3                              | $[1 \ e^{j6\pi/5} \ e^{j2\pi/5} \ e^{j8\pi/5} \ e^{j4\pi/5}]$                                              | $[+1 \ -1 \ -1 \ +1]$              |
| 4                              | $[1 \ e^{j8\pi/5} \ e^{j6\pi/5} \ e^{j4\pi/5} \ e^{j2\pi/5}]$                                              | -                                  |

### 5.4.2B PUCCH format 4

The block of bits  $b(0), \dots, b(M_{\text{bit}} - 1)$  shall be scrambled with a UE-specific scrambling sequence, resulting in a block of scrambled bits  $\tilde{b}(0), \dots, \tilde{b}(M_{\text{bit}} - 1)$  according to

$$\tilde{b}(i) = (b(i) + c(i)) \bmod 2$$

where the scrambling sequence  $c(i)$  is given by clause 7.2. The scrambling sequence generator shall be initialised with  $c_{\text{init}} = (\lfloor n_s/2 \rfloor + 1) \cdot (2N_{\text{ID}}^{\text{cell}} + 1) \cdot 2^{16} + n_{\text{RNTI}}$  at the start of each subframe where  $n_{\text{RNTI}}$  is the C-RNTI.

The block of scrambled bits  $\tilde{b}(0), \dots, \tilde{b}(M_{\text{bit}} - 1)$  shall be QPSK modulated as described in Clause 7.1, resulting in a block of complex-valued modulation symbols  $d(0), \dots, d(M_{\text{symb}} - 1)$  where  $M_{\text{symb}} = M_{\text{bit}}/2$ .

The block of complex-valued symbols  $d(0), \dots, d(M_{\text{symb}} - 1)$  is divided into  $N_0^{\text{PUCCH}} + N_1^{\text{PUCCH}}$  sets, each corresponding to one SC-FDMA symbol. Transform precoding shall be applied according to

$$z^{(\tilde{p})}(l \cdot M_{\text{sc}}^{\text{PUCCH4}} + k) = \frac{1}{\sqrt{M_{\text{sc}}^{\text{PUCCH4}}}} \sum_{i=0}^{M_{\text{sc}}^{\text{PUCCH4}} - 1} d(l \cdot M_{\text{sc}}^{\text{PUCCH4}} + i) e^{-j \frac{2\pi k i}{M_{\text{sc}}^{\text{PUCCH4}}}}$$

$$k = 0, \dots, M_{\text{sc}}^{\text{PUCCH4}} - 1$$

$$l = 0, \dots, N_0^{\text{PUCCH}} + N_1^{\text{PUCCH}} - 1$$

where  $\tilde{p} = 0$ ,  $N_0^{\text{PUCCH}}$  and  $N_1^{\text{PUCCH}}$  are given by Table 5.4.2C-1 for normal PUCCH format 4 and shortened PUCCH format 4, resulting in a block of complex-valued symbols  $z^{(\tilde{p})}(0), \dots, z^{(\tilde{p})}(M_{\text{symb}} - 1)$ . The variable

$M_{\text{sc}}^{\text{PUCCH4}} = M_{\text{RB}}^{\text{PUCCH4}} \cdot N_{\text{sc}}^{\text{RB}}$ , where  $M_{\text{RB}}^{\text{PUCCH4}}$  represents the bandwidth of the PUCCH format 4 in terms of resource blocks, shall fulfil

$$M_{\text{RB}}^{\text{PUCCH4}} = 2^{\alpha_2} \cdot 3^{\alpha_3} \cdot 5^{\alpha_5} \leq N_{\text{RB}}^{\text{UL}}$$

where  $\alpha_2, \alpha_3, \alpha_5$  is a set of non-negative integers.

### 5.4.2C PUCCH format 5

The block of bits  $b(0), \dots, b(M_{\text{bit}} - 1)$  shall be scrambled with a UE-specific scrambling sequence, resulting in a block of scrambled bits  $\tilde{b}(0), \dots, \tilde{b}(M_{\text{bit}} - 1)$  according to

$$\tilde{b}(i) = (b(i) + c(i)) \bmod 2$$

where the scrambling sequence  $c(i)$  is given by clause 7.2. The scrambling sequence generator shall be initialised with  $c_{\text{init}} = (\lfloor n_s/2 \rfloor + 1) \cdot (2N_{\text{ID}}^{\text{cell}} + 1) \cdot 2^{16} + n_{\text{RNTI}}$  at the start of each subframe where  $n_{\text{RNTI}}$  is the C-RNTI.

The block of scrambled bits  $\tilde{b}(0), \dots, \tilde{b}(M_{\text{bit}} - 1)$  shall be QPSK modulated as described in Clause 7.1, resulting in a block of complex-valued modulation symbols  $d(0), \dots, d(M_{\text{symb}} - 1)$  where  $M_{\text{symb}} = M_{\text{bit}}/2$ .

The complex-valued symbols  $d(0), \dots, d(M_{\text{symb}} - 1)$  shall be divided into  $N_0^{\text{PUCCH}} + N_1^{\text{PUCCH}}$  sets, each corresponding to one SC-FDMA symbol. Block-wise spreading shall be applied according to

$$y_n(i) = w_{n_{\text{oc}}}(i) \cdot d(i \bmod N_{\text{sc}}^{\text{RB}} / N_{\text{SF}}^{\text{PUCCH}} + n \cdot N_{\text{sc}}^{\text{RB}} / N_{\text{SF}}^{\text{PUCCH}})$$

$$n = 0, \dots, N_0^{\text{PUCCH}} + N_1^{\text{PUCCH}} - 1$$

$$i = 0, 1, \dots, N_{\text{sc}}^{\text{RB}} - 1$$

where  $N_{\text{SF}}^{\text{PUCCH}} = 2$ ,  $N_0^{\text{PUCCH}}$  and  $N_1^{\text{PUCCH}}$  are given by Table 5.4.2C-1 for normal PUCCH format 5 and shortened PUCCH format 5, and  $w_{n_{\text{oc}}}(i)$  is given by Table 5.4.2C-2 with  $n_{\text{oc}}$  provided by higher layers.

The block-wise spread complex-valued symbols shall be transform precoded according to

$$z^{(\tilde{p})}(n \cdot N_{\text{sc}}^{\text{RB}} + k) = \frac{1}{\sqrt{N_{\text{sc}}^{\text{RB}}}} \sum_{i=0}^{N_{\text{sc}}^{\text{RB}}-1} y_n(i) e^{-j \frac{2\pi i k}{N_{\text{sc}}^{\text{RB}}}}$$

$$k = 0, \dots, N_{\text{sc}}^{\text{RB}} - 1$$

$$n = 0, \dots, N_0^{\text{PUCCH}} + N_1^{\text{PUCCH}} - 1$$

where  $\tilde{p} = 0$ , resulting in a block of complex-valued symbols  $z^{(\tilde{p})}(0), \dots, z^{(\tilde{p})}((N_0^{\text{PUCCH}} + N_1^{\text{PUCCH}})N_{\text{sc}}^{\text{RB}} - 1)$ .

**Table 5.4.2C-1: The quantities  $N_0^{\text{PUCCH}}$  and  $N_1^{\text{PUCCH}}$**

| PUCCH format type      | Normal cyclic prefix |                      | Extended cyclic prefix |                      |
|------------------------|----------------------|----------------------|------------------------|----------------------|
|                        | $N_0^{\text{PUCCH}}$ | $N_1^{\text{PUCCH}}$ | $N_0^{\text{PUCCH}}$   | $N_1^{\text{PUCCH}}$ |
| Normal PUCCH format    | 6                    | 6                    | 5                      | 5                    |
| Shortened PUCCH format | 6                    | 5                    | 5                      | 4                    |

**Table 5.4.2C-2: Orthogonal sequences  $w_{n_{\text{oc}}}(i)$**

| $n_{\text{oc}}$ | Orthogonal sequences $[w_{n_{\text{CDM}}}(0) \dots w_{n_{\text{CDM}}}(N_{\text{sc}}^{\text{RB}} - 1)]$ |
|-----------------|--------------------------------------------------------------------------------------------------------|
| 0               | [+1 +1 +1 +1 +1 +1 +1 +1 +1 +1 +1 +1]                                                                  |
| 1               | [+1 +1 +1 +1 +1 +1 -1 -1 -1 -1 -1 -1]                                                                  |

### 5.4.3 Mapping to physical resources

The block of complex-valued symbols  $z^{(\tilde{p})}(i)$  shall be multiplied with the amplitude scaling factor  $\beta_{\text{PUCCH}}$  in order to conform to the transmit power  $P_{\text{PUCCH}}$  specified in Clause 5.1.2.1 in TS 36.213 [4], and mapped in sequence starting with  $z^{(\tilde{p})}(0)$  to resource elements. PUCCH uses one or more resource block in each of the two slots in a subframe.

Within the physical resource block(s) used for transmission, the mapping of  $z^{(\tilde{p})}(i)$  to resource elements  $(k, l)$  on antenna port  $p$  and not used for transmission of reference signals shall be in increasing order of first  $k$ , then  $l$  and finally the slot number, starting with the first slot in the subframe. The relation between the index  $\tilde{p}$  and the antenna port number  $p$  is given by Table 5.2.1-1.

For non-BL/CE UEs, except for PUCCH format 4, the physical resource blocks to be used for transmission of PUCCH in slot  $n_s$  are given by

$$n_{\text{PRB}} = \begin{cases} \left\lfloor \frac{m}{2} \right\rfloor & \text{if } (m + n_s \bmod 2) \bmod 2 = 0 \\ N_{\text{RB}}^{\text{UL}} - 1 - \left\lfloor \frac{m}{2} \right\rfloor & \text{if } (m + n_s \bmod 2) \bmod 2 = 1 \end{cases}$$

For BL/CE UEs, PUCCH is transmitted with  $N_{\text{rep}}^{\text{PUCCH}} \geq 1$  repetitions.

- The BL/CE UE is not expected to transmit with  $N_{\text{rep}}^{\text{PUCCH}} > 1$  when *ce-PDSCH-14HARQ-Config* is configured.

The PUCCH transmission spans  $N_{\text{abs}}^{\text{PUCCH}} \geq N_{\text{rep}}^{\text{PUCCH}}$  consecutive subframes, including subframes that are not BL/CE UL subframes where the UE postpones the PUCCH transmission if  $N_{\text{rep}}^{\text{PUCCH}} > 1$ . If the BL/CE UE is configured with *ce-HARQ-AckDelay-r17* indicating Alt-2e, the UE does not postpone the PUCCH transmission.

- The quantity  $N_{\text{rep}}^{\text{PUCCH}}$  is given
  - by the higher layer parameter *pucch-NumRepetitionCE-Format1* for PUCCH format 1/1a and *pucch-NumRepetitionCE-Format2* for PUCCH format 2/2a/2b, if configured. Otherwise
  - by the higher-layer parameter *pucch-NumRepetitionCE-Msg4-Level0-r13*, *pucch-NumRepetitionCE-Msg4-Level1-r13*, *pucch-NumRepetitionCE-Msg4-Level2-r13* or *pucch-NumRepetitionCE-Msg4-Level3-r13*.
- If uplink resource reservation is enabled for the UE as specified in [9], then in case of PUCCH transmission with  $N_{\text{rep}}^{\text{PUCCH}} > 1$  associated with C-RNTI or SPS C-RNTI using UE-specific MPDCCH search space including PUCCH transmission without a corresponding MPDCCH,
  - In a subframe that is fully reserved as defined in clause 8.0 in [4], the PUCCH transmission is postponed until the next BL/CE uplink subframe that is not fully reserved.
  - In a subframe that is partially reserved, the reserved SC-FDMA symbols shall be counted in the PUCCH mapping but not used for transmission of the PUCCH.

The physical resource blocks to be used for transmission of PUCCH in subframe  $i$  within the  $N_{\text{abs}}^{\text{PUCCH}}$  consecutive subframes are given by

$$n_{\text{PRB}}(i) = \begin{cases} m'(j)/2 & \text{if } m'(j) \bmod 2 = 0 \\ \lfloor N_{\text{RB}}^{\text{UL}} - 1 - \lfloor m'(j)/2 \rfloor \rfloor & \text{if } m'(j) \bmod 2 = 1 \end{cases}$$

$$m'(j) = \begin{cases} m & \text{if } j \bmod 2 = 0 \\ m+1 & \text{if } j \bmod 2 = 1 \text{ and } m \bmod 2 = 0 \\ m-1 & \text{if } j \bmod 2 = 1 \text{ and } m \bmod 2 = 1 \end{cases}$$

$$j = \left\lfloor \frac{i}{N_{\text{NB}}^{\text{ch,UL}}} \right\rfloor$$

$$i_0 \leq i \leq i_0 + N_{\text{abs}}^{\text{PUCCH}} - 1$$

where  $i_0$  is the absolute subframe number of the first uplink subframe intended for PUCCH.

The variable  $m$  depends on the PUCCH format.

- Formats 1, 1a and 1b:

$$m = \begin{cases} N_{\text{RB}}^{(2)} & \text{if } n_{\text{PUCCH}}^{(1,\tilde{p})} < c \cdot N_{\text{cs}}^{(1)} / \Delta_{\text{shift}}^{\text{PUCCH}} \\ \left\lfloor \frac{n_{\text{PUCCH}}^{(1,\tilde{p})} - c \cdot N_{\text{cs}}^{(1)} / \Delta_{\text{shift}}^{\text{PUCCH}}}{c \cdot N_{\text{sc}}^{\text{RB}} / \Delta_{\text{shift}}^{\text{PUCCH}}} \right\rfloor + N_{\text{RB}}^{(2)} + \left\lceil \frac{N_{\text{cs}}^{(1)}}{8} \right\rceil & \text{otherwise} \end{cases}$$

$$c = \begin{cases} 3 & \text{normal cyclic prefix} \\ 2 & \text{extended cyclic prefix} \end{cases}$$

- Formats 2, 2a and 2b:

$$m = \left\lfloor n_{\text{PUCCH}}^{(2,\tilde{p})} / N_{\text{sc}}^{\text{RB}} \right\rfloor$$

- Format 3:

$$m = \left\lfloor n_{\text{PUCCH}}^{(3,\tilde{p})} / N_{\text{SF},0}^{\text{PUCCH}} \right\rfloor$$

- Format 5 (non-BL/CE UEs only):

$$m = n_{\text{PUCCH}}^{(5)}$$

For non-BL/CE UEs, for PUCCH format 4, the physical resource blocks to be used for transmission of PUCCH in slot  $n_s$  are given by

$$n_{\text{PRB}} = \begin{cases} m & \text{if } n_s \bmod 2 = 0 \\ N_{\text{RB}}^{\text{UL}} - 1 - m & \text{if } n_s \bmod 2 = 1 \end{cases}$$

$$m = n_{\text{PUCCH}}^{(4)}, n_{\text{PUCCH}}^{(4)} + 1, \dots, n_{\text{PUCCH}}^{(4)} + M_{\text{RB}}^{\text{PUCCH4}} - 1$$

where  $M_{\text{RB}}^{\text{PUCCH4}}$  is obtained from [4].

Mapping of modulation symbols for the physical uplink control channel for PUCCH formats 1 – 3 is illustrated in Figure 5.4.3-1.

In case of simultaneous transmission of sounding reference signal and PUCCH format 1, 1a, 1b, 3, 4 or 5 when there is one serving cell configured, the shortened PUCCH format shall be used where the last SC-FDMA symbol in the second slot of a subframe shall be left empty.

In case of guard period for narrowband or wideband retuning for BL/CE UEs, if an SC-FDMA symbol is left empty due to guard period, the SC-FDMA symbol shall be counted in the PUCCH mapping but not used for transmission of the PUCCH. The SC-FDMA symbol affected by the guard period can be the first SC-FDMA symbol in the first slot of a subframe and/or the last SC-FDMA symbol in the second slot of a subframe.

For BL/CE UEs communicating over NTN, for PUCCH transmission, for frame structure type 1, after a transmission duration of  $N_{\text{segment}}^{\text{precompensation}}$  time units (which may include subframes that are not BL/CE UL subframes), a transmission gap of  $N_{\text{gap}}^{\text{precompensation}}$  time units shall be counted for the PUCCH resource mapping but not used for transmission of the PUCCH, according to the single UE capability *ntn-SegmentedPrecompensationGaps-r17*, as specified in 3GPP TS 36.331 [9]. The quantity  $N_{\text{segment}}^{\text{precompensation}}$  is provided by higher layers, and the quantity  $N_{\text{gap}}^{\text{precompensation}}$  is configured by higher layers based on the UE capability, if signalled.

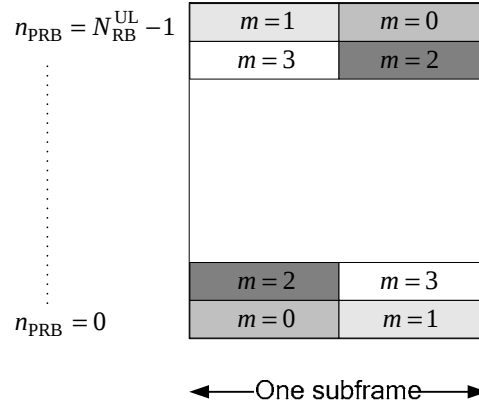


Figure 5.4.3-1: Mapping to physical resource blocks for PUCCH formats 1 – 3 for non-BL/CE UEs.

## 5.4A Short Physical Uplink Control Channel

### 5.4A.1 General

The short physical uplink control channel, SPUCCH, carries uplink control information. Simultaneous transmission of SPUCCH and PUSCH from the same UE where both SPUCCH and PUSCH is using either slot or subslot transmission is supported if enabled by higher layers (see *simultaneousPUCCH-PUSCH* in TS 36.331 [9]). For frame structure type 2 and in UpPTS, transmission of SPUCCH is not supported.

SPUCCH supports multiple formats as shown in Table 5.4A-1 and Table 5.4A-2 with different number of bits carried by each SPUCCH.

**Table 5.4A-1: SPUCCH formats for slot transmission**

| SPUCCH format | Modulation scheme | Number of bits per slot, $M_{\text{bit}}$                                                                      |
|---------------|-------------------|----------------------------------------------------------------------------------------------------------------|
| 1             | N/A               | N/A                                                                                                            |
| 1a            | BPSK              | 1                                                                                                              |
| 1b            | QPSK              | 2                                                                                                              |
| 3             | QPSK              | 24                                                                                                             |
| 4             | QPSK              | $M_{\text{RB}}^{\text{SPUCCH4}} \cdot N_{\text{sc}}^{\text{RB}} \cdot N_{\text{slot}}^{\text{SPUCCH}} \cdot 2$ |

**Table 5.4A-2: SPUCCH formats for subslot transmission**

| SPUCCH format | Modulation scheme | Number of bits per subslot, $M_{\text{bit}}$                                                                      |
|---------------|-------------------|-------------------------------------------------------------------------------------------------------------------|
| 1             | N/A               | N/A                                                                                                               |
| 1a            | N/A               | 1                                                                                                                 |
| 1b            | N/A               | 2                                                                                                                 |
| 4             | QPSK              | $M_{\text{RB}}^{\text{SPUCCH4}} \cdot N_{\text{sc}}^{\text{RB}} \cdot N_{\text{subslot}}^{\text{SPUCCH}} \cdot 2$ |

The quantity  $M_{\text{RB}}^{\text{SPUCCH4}}$  represents the bandwidth of the SPUCCH format 4 as defined by clause 5.4A.4.1, and  $N_{\text{slot}}^{\text{SPUCCH}}$  and  $N_{\text{subslot}}^{\text{SPUCCH}}$  are defined in Table 5.4A.4.1-1 and Table 5.4A.4.2-1, respectively.

SPUCCH formats 1/1a/1b use a cyclic shift,  $n_{\text{cs}}^{\text{cell}}(n_s, l)$ , which varies with the symbol number  $l$  and the slot number  $n_s$  as described in clause 5.4.

### 5.4A.2 SPUCCH formats 1,1a,1b

#### 5.4A.2.1 Slot-SPUCCH

Slot-SPUCCH format 1, 1a, 1b can be configured by higher layers to either have frequency hopping enabled or disabled (see *n1SlotSPUCCH-FH-AN-List* and *n1SlotSPUCCH-NoFH-AN-List* in TS 36.331 [9]).

In case slot-SPUCCH format 1, 1a, 1b and frequency hopping is enabled, the scrambled and block-wise spread complex-valued symbols  $z^{(\tilde{p})}$  are generated as described in clause 5.4.1 for PUCCH format 1/1a/1b where  $S(n_s) = 1$ ,  $m' = 0$  and  $w(m) = +1$ .

In case slot-SPUCCH format 1, 1a, 1b and frequency hopping is disabled, the scrambled and block-wise spread complex-valued symbols  $z^{(\tilde{p})}$  are generated as described in clause 5.4.1 for PUCCH format 1/1a/1b where  $m' = 0$ .

Irrespective of frequency hopping being enabled or disabled,  $N_{\text{SF}}^{\text{PUCCH}}$  is applied as described in clause 5.4.1 for the slot in which the slot-SPUCCH is transmitted in, i.e. either in the first or the second slot of the subframe.

Resources used for transmission of slot-SPUCCH format 1, 1a and 1b are identified by a resource index  $n_{\text{SPUCCH}}^{(1, \tilde{p})}$  from which the cyclic shift  $\alpha_{\tilde{p}}(n_s, l)$  is derived:

$$\alpha_{\tilde{p}}(n_s, l) = 2\pi \cdot n_{cs}^{(\tilde{p})}(n_s, l) / N_{sc}^{RB},$$

In case frequency hopping is enabled, the cyclic shift is determined as described in clause 5.4.2, assuming the condition  $n_{PUCCH}^{(2, \tilde{p})} < N_{sc}^{RB} N_{RB}^{(2)}$  is fulfilled.

In case frequency hopping is disabled, the resource index  $n_{SPUCCH}^{(1, \tilde{p})}$  also indicates the orthogonal sequence index  $n_{oc}^{(\tilde{p})}(n_s)$ . Both the cyclic shift and the orthogonal sequence index is in this case determined as described in clause 5.4.1.

### 5.4A.2.2 Subslot-SPUCCH

For subslot-SPUCCH formats 1a and 1b, one or two bits are communicated by SPUCCH resource selection. The resource set available for selection are configured by higher layers (see *n1SubslotSPUCCH-AN-List* and *sr-SubslotSPUCCH-ResourceList* in TS 36.331 [9]). For subslot-SPUCCH format 1, information is carried by the presence/absence of transmission of subslot-SPUCCH from the UE.

The sequence  $y^{(\tilde{p}, \delta)}(n)$  is generated as described in clause 5.4.1, assuming  $d(0) = 1$ .

The block of complex-valued symbols  $y^{(\tilde{p})}(0), \dots, y^{(\tilde{p})}(N_{seq}^{PUCCH} - 1)$  shall be scrambled by  $S(n_s) = 1$  as described in clause 5.4.1 assuming  $w_{n_{oc}^{(\tilde{p})}}(i) = 1$ ,  $m' = 0$ , and with  $N_{SF}^{PUCCH}$  replaced by  $N_{SF}^{SPUCCH}$ , defined in Table 5.4A.2.2-1.

**Table 5.4A.2.2-1: The quantity  $N_{SF}^{SPUCCH}$  for subslot-SPUCCH formats 1a and 1b**

| SPUCCH format type      | Subslot number in subframe | $N_{SF}^{SPUCCH}$ |
|-------------------------|----------------------------|-------------------|
| Normal SPUCCH format    | 1,2,3,4                    | 2                 |
| Normal SPUCCH format    | 0,5                        | 3                 |
| Shortened SPUCCH format | 5                          | 2                 |

Resources used for transmission of SPUCCH format 1, 1a and 1b are identified by a resource index  $n_{SPUCCHi}^{(1, \tilde{p})}$  from which the cyclic shift  $\alpha_{\tilde{p}}(n_s, l)$  is determined, as described in clause 5.4.2, assuming the condition  $n_{PUCCH}^{(2, \tilde{p})} < N_{sc}^{RB} N_{RB}^{(2)}$  is fulfilled. The resource set for subslot-SPUCCH format 1/1a/1b is configured by higher layers (see *n1SubslotSPUCCH-AN-List* in TS 36.331 [9]):

- subslot-SPUCCH format 1:  $n_{SPUCCHi}^{(1, \tilde{p})}, i \in \{0\}$
- subslot-SPUCCH format 1a:  $n_{SPUCCHi}^{(1, \tilde{p})}, i \in \{0, 1\}$
- subslot-SPUCCH format 1b:  $n_{SPUCCHi}^{(1, \tilde{p})}, i \in \{0, 1, 2, 3\}$

Each resource indicates (a) bit state(s) as defined by Table 5.4A.2.2-2.

**Table 5.4A.2.2-2: Subslot-SPUCCH resource for formats 1a and 1b**

| PUCCH format | $b(0), \dots, b(M_{bit} - 1)$ | $n_{SPUCCHi}^{(1, \tilde{p})}$  |
|--------------|-------------------------------|---------------------------------|
| 1            | -                             | $n_{SPUCCH,0}^{(1, \tilde{p})}$ |
| 1a           | 0                             | $n_{SPUCCH,0}^{(1, \tilde{p})}$ |
|              | 1                             | $n_{SPUCCH,1}^{(1, \tilde{p})}$ |
| 1b           | 00                            | $n_{SPUCCH,0}^{(1, \tilde{p})}$ |
|              | 10                            | $n_{SPUCCH,1}^{(1, \tilde{p})}$ |
|              | 01                            | $n_{SPUCCH,2}^{(1, \tilde{p})}$ |
|              | 11                            | $n_{SPUCCH,3}^{(1, \tilde{p})}$ |

### 5.4A.3 SPUCCH format 3

#### 5.4A.3.1 Slot-SPUCCH

The complex-valued modulation symbols  $d(0), \dots, d(M_{\text{symb}} - 1)$  shall be generated as described in clause 5.4.2A.

Depending on if the slot-SPUCCH is transmitted in the first or the second slot of the subframe, different block-wise spreading with the orthogonal sequences  $w_{n_{\text{oc},0}}^{(\tilde{p})}(i)$  or  $w_{n_{\text{oc},1}}^{(\tilde{p})}(i)$  is applied. Each spreading results in  $N_{\text{SF}}^{\text{SPUCCH}}$  sets of  $N_{\text{sc}}^{\text{RB}}$  values each according to:

$$y_n^{(\tilde{p})}(i) = \begin{cases} w_{n_{\text{oc},0}}^{(\tilde{p})}(n) \cdot e^{j\pi \lfloor n_{\text{cs}}^{\text{cell}}(n_s, l) / 64 \rfloor / 2} \cdot d(i) & \text{if } n_s \bmod 2 = 0 \\ w_{n_{\text{oc},1}}^{(\tilde{p})}(n) \cdot e^{j\pi \lfloor n_{\text{cs}}^{\text{cell}}(n_s, l) / 64 \rfloor / 2} \cdot d(i) & \text{otherwise} \end{cases}$$

$$n = 0, \dots, N_{\text{SF}}^{\text{SPUCCH}} - 1$$

$$i = 0, 1, \dots, N_{\text{sc}}^{\text{RB}} - 1$$

where

- $N_{\text{SF}}^{\text{SPUCCH}} = N_{\text{SF},0}^{\text{PUCCH}}$  (see clause 5.4.2A) if transmitted in the first slot, and  $N_{\text{SF}}^{\text{SPUCCH}} = N_{\text{SF},1}^{\text{PUCCH}}$  (see clause 5.4.2A), if transmitted in the second slot.
- The orthogonal sequences  $w_{n_{\text{oc},0}}^{(\tilde{p})}(i)$  and  $w_{n_{\text{oc},1}}^{(\tilde{p})}(i)$  are given by Table 5.4.2A-1

Resources used for transmission of SPUCCH format 3 are identified by a resource index  $n_{\text{SPUCCH}}^{(3,\tilde{p})}$  from which the quantities  $n_{\text{oc},0}^{(\tilde{p})}$  and  $n_{\text{oc},1}^{(\tilde{p})}$  are derived according to clause 5.4A.3 by replacing  $n_{\text{PUCCH}}^{(3,\tilde{p})}$  with  $n_{\text{SPUCCH}}^{(3,\tilde{p})}$ .

Each set of complex-valued symbols shall be cyclically shifted and transform precoded according to clause 5.4.2A with  $N_{\text{SF},0}^{\text{PUCCH}} + N_{\text{SF},1}^{\text{PUCCH}}$  replaced by  $N_{\text{SF}}^{\text{SPUCCH}}$  in the transform precoding.

### 5.4A.4 SPUCCH format 4

#### 5.4A.4.1 Slot-SPUCCH

The block of bits  $b(0), \dots, b(M_{\text{bit}} - 1)$  shall be scrambled according to clause 5.4.2B.

The block of scrambled bits  $\tilde{b}(0), \dots, \tilde{b}(M_{\text{bit}} - 1)$  shall be QPSK modulated as described in Clause 7.1, resulting in a block of complex-valued modulation symbols  $d(0), \dots, d(M_{\text{symb}} - 1)$  where  $M_{\text{symb}} = M_{\text{bit}} / 2$ .

The block of complex-valued symbols  $d(0), \dots, d(M_{\text{symb}} - 1)$  is divided into  $N_{\text{slot}}^{\text{SPUCCH}}$  (defined in Table 5.4A.4.1-1) sets, each corresponding to one SC-FDMA symbol. Transform precoding shall be applied according to clause 5.4.2B replacing  $M_{\text{sc}}^{\text{PUCCH4}}$  with  $M_{\text{sc}}^{\text{SPUCCH4}}$  and replacing  $N_0^{\text{PUCCH}} + N_1^{\text{PUCCH}}$  with  $N_{\text{slot}}^{\text{SPUCCH}}$ .

The variable  $M_{\text{sc}}^{\text{SPUCCH4}} = M_{\text{RB}}^{\text{SPUCCH4}} \cdot N_{\text{sc}}^{\text{RB}}$ , where  $M_{\text{RB}}^{\text{SPUCCH4}}$  represents the bandwidth of the SPUCCH format 4 in terms of resource blocks in the frequency domain, and is determined by higher layer signalling (*n4numberOfPRB-r15*, see TS 36.213 [4, Table 10.1.1-2] and TS 36.331 [9]), and shall fulfil

$$M_{\text{RB}}^{\text{SPUCCH4}} = 2^{\alpha_2} \cdot 3^{\alpha_3} \cdot 5^{\alpha_5} \leq N_{\text{RB}}^{\text{UL}},$$

where,  $\alpha_2, \alpha_3, \alpha_5$  is a set of non-negative integers.

**Table 5.4A.4.1-1: The quantity  $N_{\text{slot}}^{\text{SPUCCH}}$ .**

| SPUCCH format type      | $N_{\text{slot}}^{\text{SPUCCH}}$ |
|-------------------------|-----------------------------------|
| Normal SPUCCH format    | 5                                 |
| Shortened SPUCCH format | 4                                 |

#### 5.4A.4.2 Subslot-SPUCCH

For subslot-SPUCCH the procedure of slot-SPUCCH in clause 5.4A.4.1 is followed except that:

- the block of complex-valued symbols  $d(0), \dots, d(M_{\text{sym}} - 1)$  is divided into  $N_{\text{subslot}}^{\text{SPUCCH}}$  (defined in Table 5.4A.4.2-1) sets, instead of  $N_{\text{slot}}^{\text{SPUCCH}}$  sets, and,
- $N_{\text{slot}}^{\text{SPUCCH}}$  is replaced by  $N_{\text{subslot}}^{\text{SPUCCH}}$ , in the transform precoding.

**Table 5.4A.4.2-1: The quantity  $N_{\text{subslot}}^{\text{SPUCCH}}$ .**

| SPUCCH format type      | Subslot number in subframe | $N_{\text{subslot}}^{\text{SPUCCH}}$ |
|-------------------------|----------------------------|--------------------------------------|
| Normal SPUCCH format    | 1,2,3,4                    | 1                                    |
| Normal SPUCCH format    | 0,5                        | 2                                    |
| Shortened SPUCCH format | 5                          | 1                                    |

#### 5.4A.5 Mapping to physical resources

The block of complex-valued symbols  $z^{(\tilde{p})}(i)$  shall be multiplied with the amplitude scaling factor  $\beta_{\text{SPUCCH}}$  in order to conform to the transmit power  $P_{\text{SPUCCH}}$  specified in Clause 5.1.2.1 of TS 36.213 [4], and mapped in sequence starting with  $z^{(\tilde{p})}(0)$  to resource elements.

SPUCCH uses one or more resource block in the frequency domain and is mapped to either a slot or a subslot in the time domain. Within the physical resource block(s) used for transmission, the mapping of  $z^{(\tilde{p})}(i)$  to resource elements  $(k, l)$  on antenna port  $p$  and not used for transmission of reference signals shall be in increasing order of first  $k$ , then  $l$ .

The starting symbol  $l$  for each subslot number is provided by Table 5.4A.4.5-1 for subslot-SPUCCH.

For slot-SPUCCH the starting symbol is  $l=0$  for the slot the SPUCCH is transmitted in.

**Table 5.4A.5-1: Starting symbol for subslot-SPUCCH mapping**

|                | Subslot number |   |   |   |   |   |
|----------------|----------------|---|---|---|---|---|
|                | 0              | 1 | 2 | 3 | 4 | 5 |
| Format 1/1a/1b | 0              | 3 | 5 | 0 | 2 | 4 |
| Format 4       | 1              | 4 | 6 | 1 | 3 | 5 |

The relation between the index  $\tilde{p}$  and the antenna port number  $p$  is given by Table 5.2.1-1.

The physical resource blocks ( $n_{\text{PRB}}$ ) within which the transmission of SPUCCH is carried out in slot  $n_s$  depends on the SPUCCH format and whether frequency hopping is enabled or not.

In case of slot-SPUCCH format 1, 1a, 1b and frequency hopping disabled, the PRB used is determined as described in clause 5.4.3 for PUCCH format 1, 1a, 1b.

In case of slot-SPUCCH format 3, the PRB used is given by

$$n_{\text{PRB}} = \begin{cases} \left\lfloor \frac{m}{2} \right\rfloor & \text{if } (m + n_s \bmod 2) \bmod 2 = 0 \\ N_{\text{RB}}^{\text{UL}} - 1 - \left\lfloor \frac{m}{2} \right\rfloor & \text{if } (m + n_s \bmod 2) \bmod 2 = 1 \end{cases}$$

For the other SPUCCH formats, it is determined by Table 5.4A.5-2, Table 5.4A.5-3 and Table 5.4A.5-4.

**Table 5.4A.5-2:  $n_{\text{PRB}}$  for slot-SPUCCH format 1, 1a, 1b with frequency hopping enabled**

| Slot number       | Slot-SPUCCH format                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                   | Format 1/1a/1b with frequency hopping enabled                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| $n_s \bmod 2 = 0$ | $\left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 0, 1 \text{ or } 2$ $N_{\text{RB}}^{\text{UL}} - 1 - \left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 3, 4, 5 \text{ or } 6$ $\text{for } (m + n_s \bmod 2) \bmod 2 = 0$ $N_{\text{RB}}^{\text{UL}} - 1 - \left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 0, 1 \text{ or } 2$ $\left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 3, 4, 5 \text{ or } 6$ $\text{for } (m + n_s \bmod 2) \bmod 2 = 1$ |
| $n_s \bmod 2 = 1$ | $\left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 0, 1, 2 \text{ or } 3$ $N_{\text{RB}}^{\text{UL}} - 1 - \left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 4, 5 \text{ or } 6$ $\text{for } (m + n_s \bmod 2) \bmod 2 = 0$ $N_{\text{RB}}^{\text{UL}} - 1 - \left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 0, 1, 2 \text{ or } 3$ $\left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 4, 5 \text{ or } 6$ $\text{for } (m + n_s \bmod 2) \bmod 2 = 1$ |

**Table 5.4A.5-3:  $n_{\text{PRB}}$  for slot-SPUCCH format 4**

| Slot number       | Slot-SPUCCH format                                                                                                           |
|-------------------|------------------------------------------------------------------------------------------------------------------------------|
|                   | Format 4                                                                                                                     |
| $n_s \bmod 2 = 0$ | $m \quad \text{for } l = 0, 1 \text{ or } 2$ $N_{\text{RB}}^{\text{UL}} - 1 - m \quad \text{for } l = 3, 4, 5 \text{ or } 6$ |
| $n_s \bmod 2 = 1$ | $m \quad \text{for } l = 4, 5 \text{ or } 6$ $N_{\text{RB}}^{\text{UL}} - 1 - m \quad \text{for } l = 0, 1, 2 \text{ or } 3$ |

**Table 5.4A.5-4:  $n_{\text{PRB}}$  for subslot-SPUCCH format 1, 1a, 1b, 4**

| Subslot number | SPUCCH format                                                                                                                                                                                                    |                                |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
|                | Format 1/1a/1b                                                                                                                                                                                                   | Format 4                       |
| 0              | $\left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 0$ $N_{\text{RB}}^{\text{UL}} - 1 - \left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 1, 2$ $\text{for } (m + n_s \bmod 2) \bmod 2 = 0$ | $m \quad \text{for } l = 1, 2$ |

|   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                |
|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
|   | $N_{RB}^{UL} - 1 - \left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 0$ $\left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 1, 2$ <p style="text-align: center;"><math>\text{for } (m + n_s \bmod 2) \bmod 2 = 1</math></p>                                                                                                                                                                                                                                                  |                                |
| 1 | $\left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 4$ $N_{RB}^{UL} - 1 - \left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 3$ <p style="text-align: center;"><math>\text{for } (m + n_s \bmod 2) \bmod 2 = 0</math></p> $N_{RB}^{UL} - 1 - \left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 4$ $\left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 3$ <p style="text-align: center;"><math>\text{for } (m + n_s \bmod 2) \bmod 2 = 1</math></p>       | $m \quad \text{for } l = 4$    |
| 2 | $\left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 5$ $N_{RB}^{UL} - 1 - \left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 6$ <p style="text-align: center;"><math>\text{for } (m + n_s \bmod 2) \bmod 2 = 0</math></p> $N_{RB}^{UL} - 1 - \left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 5$ $\left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 6$ <p style="text-align: center;"><math>\text{for } (m + n_s \bmod 2) \bmod 2 = 1</math></p>       | $m \quad \text{for } l = 6$    |
| 3 | $\left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 1$ $N_{RB}^{UL} - 1 - \left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 0$ <p style="text-align: center;"><math>\text{for } (m + n_s \bmod 2) \bmod 2 = 0</math></p> $N_{RB}^{UL} - 1 - \left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 1$ $\left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 0$ <p style="text-align: center;"><math>\text{for } (m + n_s \bmod 2) \bmod 2 = 1</math></p>       | $m \quad \text{for } l = 1$    |
| 4 | $\left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 2$ $N_{RB}^{UL} - 1 - \left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 3$ <p style="text-align: center;"><math>\text{for } (m + n_s \bmod 2) \bmod 2 = 0</math></p> $N_{RB}^{UL} - 1 - \left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 2$ $\left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 3$ <p style="text-align: center;"><math>\text{for } (m + n_s \bmod 2) \bmod 2 = 1</math></p>       | $m \quad \text{for } l = 3$    |
| 5 | $\left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 5, 6$ $N_{RB}^{UL} - 1 - \left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 4$ <p style="text-align: center;"><math>\text{for } (m + n_s \bmod 2) \bmod 2 = 0</math></p> $N_{RB}^{UL} - 1 - \left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 5, 6$ $\left\lfloor \frac{m}{2} \right\rfloor \quad \text{for } l = 4$ <p style="text-align: center;"><math>\text{for } (m + n_s \bmod 2) \bmod 2 = 1</math></p> | $m \quad \text{for } l = 5, 6$ |

The variable  $m$  depends on the SPUCCH format as defined in Table 5.4A.5-5.

**Table 5.4A.5-5:  $m$  for SPUCCH**

| SPUCCH Format |                  | $m$                                                                                                                                                                                                                                                                                                                                                                           |
|---------------|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Slot          | Format 1, 1a, 1b | Frequency hopping disabled:<br>see derivation of $m$ for PUCCH format 1, 1a, 1b in clause 5.4.3 replacing $n_{\text{PUCCH}}^{(1,\tilde{p})}$ with $n_{\text{SPUCCH}}^{(1,\tilde{p})}$<br>Frequency hopping enabled:<br>see derivation of $m$ for PUCCH format 2, 2a, 2b in clause 5.4.3 replacing $n_{\text{PUCCH}}^{(2,\tilde{p})}$ with $n_{\text{SPUCCH}}^{(1,\tilde{p})}$ |
|               | Format 3         | $\lfloor n_{\text{SPUCCH}}^{(3,\tilde{p})} / N_{\text{SF},0}^{\text{PUCCH}} \rfloor$                                                                                                                                                                                                                                                                                          |
|               | Format 4         | $m = n_{\text{SPUCCH}}^{(4)}, n_{\text{SPUCCH}}^{(4)} + 1, \dots, n_{\text{SPUCCH}}^{(4)} + M_{\text{RB}}^{\text{SPUCCH4}} - 1$                                                                                                                                                                                                                                               |
| Subslot       | Format 1, 1a, 1b | see derivation of $m$ for PUCCH format 2, 2a, 2b in clause 5.4.3 replacing $n_{\text{PUCCH}}^{(2,\tilde{p})}$ with $n_{\text{SPUCCH},i}^{(1,\tilde{p})}$                                                                                                                                                                                                                      |
|               | Format 4         | $m = n_{\text{SPUCCH}}^{(4)}, n_{\text{SPUCCH}}^{(4)} + 1, \dots, n_{\text{SPUCCH}}^{(4)} + M_{\text{RB}}^{\text{SPUCCH4}} - 1$                                                                                                                                                                                                                                               |

In case of subslot-SPUCCH, there is a configuration restriction that each SPUCCH resource in the resource set, of up to four resources,  $n_{\text{SPUCCH},i}^{(1,\tilde{p})}, i \in \{0,1,2,3\}$ , shall map to the same pair of PRBs ( $n_{\text{PRB}}$ ). This restriction applies separately to each of  $n1\text{SubslotSPUCCH-AN-List}$  and  $sr\text{-SubslotSPUCCH-Resource}$  in TS 36.331 [9].

In case of simultaneous transmission of sounding reference signal and SPUCCH when there is one serving cell configured, the shortened SPUCCH format shall be used where the last SC-FDMA symbol in the second slot of a subframe shall be left empty.

## 5.5 Reference signals

Two types of uplink reference signals are supported:

- Demodulation reference signal, associated with transmission of PUSCH or (S)PUCCH
- Sounding reference signal, not associated with transmission of PUSCH or (S)PUCCH

The same set of base sequences is used for demodulation and sounding reference signals.

### 5.5.1 Generation of the reference signal sequence

Reference signal sequence  $r_{u,v}^{(\alpha,\delta)}(n)$  is defined by a cyclic shift  $\alpha$  of a base sequence  $\bar{r}_{u,v}(n)$  according to

$$r_{u,v}^{(\alpha,\delta)}(n) = e^{j\alpha\left(n + \delta \frac{\varpi \bmod 2}{2}\right)} \bar{r}_{u,v}(n), \quad 0 \leq n < M_{\text{sc}}^{\text{RS}}$$

where

- $M_{\text{sc}}^{\text{RS}} = mN_{\text{sc}}^{\text{RB}} / 2^{\delta}$  is the length of the reference signal sequence,  $1 \leq m \leq N_{\text{RB}}^{\text{max, UL}}$ ,  $\varpi$  is defined in clause 5.5.2.1.2, and,
- $\delta=1$  when either
  - the higher-layer parameter *ul-DMRS-IFDMA* is set and the most recent uplink-related DCI contains the *Cyclic Shift Field mapping table for DMRS bit* field which is set to 1 to indicate the use of Table 5.5.2.1.1-3, or,
  - the *Cyclic Shift Field mapping table for DMRS bit* is set to 1 in the most recent uplink-related DCI format 7 which indicates the use of Table 5.5.2.1.1-4, and
- $\delta=0$  otherwise.

Multiple reference signal sequences are defined from a single base sequence through different values of  $\alpha$ .

Base sequences  $\bar{r}_{u,v}(n)$  are divided into groups, where  $u \in \{0,1,\dots,29\}$  is the group number and  $v$  is the base sequence number within the group, such that each group contains one base sequence ( $v=0$ ) of each length  $M_{sc}^{RS} = mN_{sc}^{RB}$ ,  $1 \leq m \leq 5$  and two base sequences ( $v=0,1$ ) of each length  $M_{sc}^{RS} = mN_{sc}^{RB}$ ,  $6 \leq m \leq N_{RB}^{\max, UL}$ . The sequence group number  $u$  and the number  $v$  within the group may vary in time as described in clauses 5.5.1.3 and 5.5.1.4, respectively. The definition of the base sequence  $\bar{r}_{u,v}(0), \dots, \bar{r}_{u,v}(M_{sc}^{RS}-1)$  depends on the sequence length  $M_{sc}^{RS}$ .

#### 5.5.1.1 Base sequences of length $\geq 3N_{sc}^{RB}$ or larger

For  $M_{sc}^{RS} \geq 3N_{sc}^{RB}$ , the base sequence  $\bar{r}_{u,v}(0), \dots, \bar{r}_{u,v}(M_{sc}^{RS}-1)$  is given by

$$\bar{r}_{u,v}(n) = x_q(n \bmod N_{ZC}^{RS}), \quad 0 \leq n < M_{sc}^{RS}$$

where the  $q^{\text{th}}$  root Zadoff-Chu sequence is defined by

$$x_q(m) = e^{-j \frac{\pi q m(m+1)}{N_{ZC}^{RS}}}, \quad 0 \leq m \leq N_{ZC}^{RS} - 1$$

with  $q$  given by

$$q = \lfloor \bar{q} + 1/2 \rfloor + v \cdot (-1)^{\lfloor 2\bar{q} \rfloor}$$

$$\bar{q} = N_{ZC}^{RS} \cdot (u+1)/31$$

The length  $N_{ZC}^{RS}$  of the Zadoff-Chu sequence is given by the largest prime number such that  $N_{ZC}^{RS} < M_{sc}^{RS}$ .

### 5.5.1.2 Base sequences of length less than $3N_{sc}^{RB}$

For  $M_{sc}^{RS} = N_{sc}^{RB}$ ,  $M_{sc}^{RS} = 2N_{sc}^{RB}$ ,  $M_{sc}^{RS} = N_{sc}^{RB}/2$ , and  $M_{sc}^{RS} = 3N_{sc}^{RB}/2$ , the base sequence is given by

$$\bar{r}_{u,v}(n) = e^{j\varphi(n)\pi/4}, \quad 0 \leq n \leq M_{sc}^{RS} - 1$$

where the value of  $\varphi(n)$  is given by Table 5.5.1.2-1, Table 5.5.1.2-2, Table 5.5.1.2-3, and Table 5.5.1.2-4 for

$M_{sc}^{RS} = N_{sc}^{RB}$ ,  $M_{sc}^{RS} = 2N_{sc}^{RB}$ ,  $M_{sc}^{RS} = N_{sc}^{RB}/2$ , and  $M_{sc}^{RS} = 3N_{sc}^{RB}/2$ , respectively. For  $M_{sc}^{RS} = 5N_{sc}^{RB}/2$ , the base sequence  $\bar{r}_{u,v}(0), \dots, \bar{r}_{u,v}(M_{sc}^{RS} - 1)$  is given by

$$\bar{r}_{u,v}(n) = e^{-j\frac{\pi(u+1)(n+1)(n+2)}{31}}, \quad 0 \leq n \leq M_{sc}^{RS} - 1$$

**Table 5.5.1.2-1: Definition of  $\varphi(n)$  for  $M_{sc}^{RS} = N_{sc}^{RB}$ .**

| $u$ | $\varphi(0), \dots, \varphi(11)$ |    |    |    |    |    |    |    |    |    |    |    |
|-----|----------------------------------|----|----|----|----|----|----|----|----|----|----|----|
| 0   | -1                               | 1  | 3  | -3 | 3  | 3  | 1  | 1  | 3  | 1  | -3 | 3  |
| 1   | 1                                | 1  | 3  | 3  | 3  | -1 | 1  | -3 | -3 | 1  | -3 | 3  |
| 2   | 1                                | 1  | -3 | -3 | -3 | -1 | -3 | -3 | 1  | -3 | 1  | -1 |
| 3   | -1                               | 1  | 1  | 1  | 1  | -1 | -3 | -3 | 1  | -3 | 3  | -1 |
| 4   | -1                               | 3  | 1  | -1 | 1  | -1 | -3 | -1 | 1  | -1 | 1  | 3  |
| 5   | 1                                | -3 | 3  | -1 | -1 | 1  | 1  | -1 | -1 | 3  | -3 | 1  |
| 6   | -1                               | 3  | -3 | -3 | -3 | 3  | 1  | -1 | 3  | 3  | -3 | 1  |
| 7   | -3                               | -1 | -1 | -1 | 1  | -3 | 3  | -1 | 1  | -3 | 3  | 1  |
| 8   | 1                                | -3 | 3  | 1  | -1 | -1 | -1 | 1  | 1  | 3  | -1 | 1  |
| 9   | 1                                | -3 | -1 | 3  | 3  | -1 | -3 | 1  | 1  | 1  | 1  | 1  |
| 10  | -1                               | 3  | -1 | 1  | 1  | -3 | -3 | -1 | -3 | -3 | 3  | -1 |
| 11  | 3                                | 1  | -1 | -1 | 3  | 3  | -3 | 1  | 3  | 1  | 3  | 3  |
| 12  | 1                                | -3 | 1  | 1  | -3 | 1  | 1  | 1  | -3 | -3 | -3 | 1  |
| 13  | 3                                | 3  | -3 | 3  | -3 | 1  | 1  | 3  | -1 | -3 | 3  | 3  |
| 14  | -3                               | 1  | -1 | -3 | -1 | 3  | 1  | 3  | 3  | 3  | -1 | 1  |
| 15  | 3                                | -1 | 1  | -3 | -1 | -1 | 1  | 1  | 3  | 1  | -1 | -3 |
| 16  | 1                                | 3  | 1  | -1 | 1  | 3  | 3  | 3  | -1 | -1 | 3  | -1 |
| 17  | -3                               | 1  | 1  | 3  | -3 | 3  | -3 | -3 | 3  | 1  | 3  | -1 |
| 18  | -3                               | 3  | 1  | 1  | -3 | 1  | -3 | -3 | -1 | -1 | 1  | -3 |
| 19  | -1                               | 3  | 1  | 3  | 1  | -1 | -1 | 3  | -3 | -1 | -3 | -1 |
| 20  | -1                               | -3 | 1  | 1  | 1  | 1  | 3  | 1  | -1 | 1  | -3 | -1 |
| 21  | -1                               | 3  | -1 | 1  | -3 | -3 | -3 | -3 | -3 | 1  | -1 | -3 |
| 22  | 1                                | 1  | -3 | -3 | -3 | -3 | -1 | 3  | -3 | 1  | -3 | 3  |
| 23  | 1                                | 1  | -1 | -3 | -1 | -3 | 1  | -1 | 1  | 3  | -1 | 1  |
| 24  | 1                                | 1  | 3  | 1  | 3  | 3  | -1 | 1  | -1 | -3 | -3 | 1  |
| 25  | 1                                | -3 | 3  | 3  | 1  | 3  | 3  | 1  | -3 | -1 | -1 | 3  |
| 26  | 1                                | 3  | -3 | -3 | 3  | -3 | 1  | -1 | -1 | 3  | -1 | -3 |
| 27  | -3                               | -1 | -3 | -1 | -3 | 3  | 1  | -1 | 1  | 3  | -3 | -3 |
| 28  | -1                               | 3  | -3 | 3  | -1 | 3  | 3  | -3 | 3  | 3  | -1 | -1 |
| 29  | 3                                | -3 | -3 | -1 | -1 | -3 | -1 | 3  | -3 | 3  | 1  | -1 |

**Table 5.5.1.2-2: Definition of  $\varphi(n)$  for  $M_{sc}^{RS} = 2N_{sc}^{RB}$**

| $u$ | $\varphi(0), \dots, \varphi(23)$ |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|----------------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | -1                               | 3  | 1  | -3 | 3  | -1 | 1  | 3  | -3 | 3  | 1  | 3  | -3 | 3  | 1  | 1  | -1 | 1  | 3  | -3 | 3  | -3 | -1 | -3 |
| 1   | -3                               | 3  | -3 | -3 | -3 | 1  | -3 | -3 | 3  | -1 | 1  | 1  | 1  | 3  | 1  | -1 | 3  | -3 | -3 | 1  | 3  | 1  | 1  | -3 |
| 2   | 3                                | -1 | 3  | 3  | 1  | 1  | -3 | 3  | 3  | 3  | 3  | 1  | -1 | 3  | -1 | 1  | 1  | -1 | -3 | -1 | -1 | 1  | 3  | 3  |
| 3   | -1                               | -3 | 1  | 1  | 3  | -3 | 1  | 1  | -3 | -1 | -1 | 1  | 3  | 1  | 3  | 1  | -1 | 3  | 1  | 1  | -3 | -1 | -3 | -1 |
| 4   | -1                               | -1 | -1 | -3 | -3 | -1 | 1  | 1  | 3  | 3  | -1 | 3  | -1 | 1  | -1 | -3 | 1  | -1 | -3 | -3 | 1  | -3 | -1 | -1 |
| 5   | -3                               | 1  | 1  | 3  | -1 | 1  | 3  | 1  | -3 | 1  | -3 | 1  | 1  | -1 | -1 | 3  | -1 | -3 | 3  | -3 | -3 | 1  | 1  | 1  |
| 6   | 1                                | 1  | -1 | -1 | 3  | -3 | -3 | 3  | -3 | 1  | -1 | -1 | 1  | -1 | 1  | 1  | -1 | -3 | -1 | 1  | -1 | 3  | -1 | -3 |
| 7   | -3                               | 3  | 3  | -1 | -1 | -3 | -1 | 3  | 1  | 3  | 1  | 3  | 1  | 1  | -1 | 3  | 1  | -1 | 1  | 3  | -3 | -1 | -1 | 1  |

|    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 8  | -3 | 1  | 3  | -3 | 1  | -1 | -3 | 3  | -3 | 3  | -1 | -1 | -1 | -1 | 1  | -3 | -3 | -3 | 1  | -3 | -3 | -3 | 1  | -3 |
| 9  | 1  | 1  | -3 | 3  | 3  | -1 | -3 | -1 | 3  | -3 | 3  | 3  | 3  | -1 | 1  | 1  | -3 | 1  | -1 | 1  | 1  | -3 | 1  | 1  |
| 10 | -1 | 1  | -3 | -3 | 3  | -1 | 3  | -1 | -1 | -3 | -3 | -3 | -1 | -3 | -3 | 1  | -1 | 1  | 3  | 3  | -1 | 1  | -1 | 3  |
| 11 | 1  | 3  | 3  | -3 | -3 | 1  | 3  | 1  | -1 | -3 | -3 | -3 | 3  | 3  | -3 | 3  | 3  | -1 | -3 | 3  | -1 | 1  | -3 | 1  |
| 12 | 1  | 3  | 3  | 1  | 1  | 1  | -1 | -1 | 1  | -3 | 3  | -1 | 1  | 1  | -3 | 3  | 3  | -1 | -3 | 3  | -3 | -1 | -3 | -1 |
| 13 | 3  | -1 | -1 | -1 | -1 | -3 | -1 | 3  | 3  | 1  | -1 | 1  | 3  | 3  | 3  | -1 | 1  | 1  | -3 | 1  | 3  | -1 | -3 | 3  |
| 14 | -3 | -3 | 3  | 1  | 3  | 1  | -3 | 3  | 1  | 3  | 1  | 1  | 3  | 3  | -1 | -1 | -3 | 1  | -3 | -1 | 3  | 1  | 1  | 3  |
| 15 | -1 | -1 | 1  | -3 | 1  | 3  | -3 | 1  | -1 | -3 | -1 | 3  | 1  | 3  | 1  | -1 | -3 | -3 | -1 | -1 | -3 | -3 | -3 | -1 |
| 16 | -1 | -3 | 3  | -1 | -1 | -1 | -1 | 1  | 1  | -3 | 3  | 1  | 3  | 3  | 1  | -1 | 1  | -3 | 1  | -3 | 1  | 1  | -3 | -1 |
| 17 | 1  | 3  | -1 | 3  | 3  | -1 | -3 | 1  | -1 | -3 | 3  | 3  | 3  | -1 | 1  | 1  | 3  | -1 | -3 | -1 | 3  | -1 | -1 | -1 |
| 18 | 1  | 1  | 1  | 1  | 1  | -1 | 3  | -1 | -3 | 1  | 1  | 3  | -3 | 1  | -3 | -1 | 1  | 1  | -3 | -3 | 3  | 1  | 1  | -3 |
| 19 | 1  | 3  | 3  | 1  | -1 | -3 | 3  | -1 | 3  | 3  | 3  | -3 | 1  | -1 | 1  | -1 | -3 | -1 | 1  | 3  | -1 | 3  | -3 | -3 |
| 20 | -1 | -3 | 3  | -3 | -3 | -3 | -1 | -1 | -3 | -1 | -3 | 3  | 1  | 3  | -3 | -1 | 3  | -1 | 1  | -1 | 3  | -3 | 1  | -1 |
| 21 | -3 | -3 | 1  | 1  | -1 | 1  | -1 | 1  | -1 | 3  | 1  | -3 | -1 | 1  | -1 | 1  | -1 | -1 | 3  | 3  | -3 | -1 | 1  | -3 |
| 22 | -3 | -1 | -3 | 3  | 1  | -1 | -3 | -1 | -3 | -3 | 3  | -3 | 3  | -3 | -1 | 1  | 3  | 1  | -3 | 1  | 3  | 3  | -1 | -3 |
| 23 | -1 | -1 | -1 | -1 | 3  | 3  | 3  | 1  | 3  | 3  | -3 | 1  | 3  | -1 | 3  | -1 | 3  | 3  | -3 | 3  | 1  | -1 | 3  | 3  |
| 24 | 1  | -1 | 3  | 3  | -1 | -3 | 3  | -3 | -1 | -1 | 3  | -1 | 3  | -1 | -1 | 1  | 1  | 1  | 1  | -1 | -1 | -3 | -1 | 3  |
| 25 | 1  | -1 | 1  | -1 | 3  | -1 | 3  | 1  | 1  | -1 | -1 | -3 | 1  | 1  | -3 | 1  | 3  | -3 | 1  | 1  | -3 | -3 | -1 | -1 |
| 26 | -3 | -1 | 1  | 3  | 1  | 1  | -3 | -1 | -1 | -3 | 3  | -3 | 3  | 1  | -3 | 3  | -3 | 1  | -1 | 1  | -3 | 1  | 1  | 1  |
| 27 | -1 | -3 | 3  | 3  | 1  | 1  | 3  | -1 | -3 | -1 | -1 | -1 | 3  | 1  | -3 | -3 | -1 | 3  | -3 | -1 | -3 | -1 | -3 | -1 |
| 28 | -1 | -3 | -1 | -1 | 1  | -3 | -1 | -1 | 1  | -1 | -3 | 1  | 1  | -3 | 1  | -3 | -3 | 3  | 1  | 1  | -1 | 3  | -1 | -1 |
| 29 | 1  | 1  | -1 | -1 | -3 | -1 | 3  | -1 | 3  | -1 | 1  | 3  | 1  | -1 | 3  | 1  | 3  | -3 | -3 | 1  | -1 | -1 | 1  | 3  |

Table 5.5.1.2-3: Definition of  $\varphi(n)$  for  $M_{sc}^{RS} = N_{sc}^{RB} / 2$ 

| $u$ | $\varphi(0), \dots, \varphi(5)$ |    |    |    |    |    |    |
|-----|---------------------------------|----|----|----|----|----|----|
| 0   | -1                              | -3 | 3  | -3 | 3  | 3  | -3 |
| 1   | -1                              | 3  | -1 | 1  | 1  | 1  | 1  |
| 2   | 3                               | -1 | -3 | -3 | 1  | 3  | 3  |
| 3   | 3                               | -1 | -1 | 1  | -1 | -1 | -1 |
| 4   | -1                              | -1 | -3 | 1  | -3 | -1 | -1 |
| 5   | 1                               | 3  | -3 | -1 | -3 | 3  | 3  |
| 6   | -3                              | 3  | -1 | -1 | 1  | -3 | -3 |
| 7   | -1                              | -3 | -3 | 1  | 3  | 3  | 3  |
| 8   | 3                               | -1 | -1 | 3  | 1  | 3  | 3  |
| 9   | 3                               | -3 | 3  | 1  | -1 | 1  | 1  |
| 10  | -3                              | 1  | -3 | -3 | -3 | -3 | -3 |
| 11  | -3                              | -3 | -3 | 1  | -3 | -3 | -3 |
| 12  | 3                               | -3 | 1  | -1 | -3 | -3 | -3 |
| 13  | 3                               | -3 | 3  | -1 | -1 | -3 | -3 |
| 14  | 3                               | -1 | 1  | 3  | 3  | 1  | 1  |
| 15  | -1                              | 1  | -1 | -3 | 1  | 1  | 1  |
| 16  | -3                              | -1 | -3 | -1 | 3  | 3  | 3  |
| 17  | 1                               | -1 | 3  | -3 | 3  | 3  | 3  |
| 18  | 1                               | 3  | 1  | 1  | -3 | 3  | 3  |
| 19  | -1                              | -3 | -1 | -1 | 3  | -3 | -3 |
| 20  | 3                               | -1 | -3 | -1 | -1 | -3 | -3 |
| 21  | 3                               | 1  | 3  | -3 | -3 | 1  | 1  |
| 22  | 1                               | 3  | -1 | -1 | 1  | -1 | -1 |
| 23  | -3                              | 1  | -3 | 3  | 3  | 3  | 3  |
| 24  | 1                               | 3  | -3 | 3  | -3 | 3  | 3  |
| 25  | -1                              | -1 | 1  | -3 | 1  | -1 | -1 |
| 26  | 1                               | -3 | -1 | -1 | 3  | 1  | 1  |
| 27  | -3                              | -1 | -1 | 3  | 1  | 1  | 1  |
| 28  | -1                              | 3  | -3 | -3 | -3 | 3  | 3  |
| 29  | 3                               | 1  | -1 | 1  | 3  | 1  | 1  |

Table 5.5.1.2-4: Definition of  $\varphi(n)$  for  $M_{sc}^{RS} = 3 N_{sc}^{RB} / 2$ 

| $u$ | $\varphi(0), \dots, \varphi(17)$ |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|----------------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | -3                               | -3 | -3 | -3 | -3 | -1 | 1  | -1 | -3 | 3  | -1 | 3  | -1 | 3  | -3 | -1 | -1 | 3  |
| 1   | -3                               | -3 | -3 | -3 | -3 | -1 | 1  | -1 | 1  | -3 | -3 | -3 | 1  | -1 | 3  | -3 | -3 | 1  |
| 2   | -3                               | -3 | -3 | -3 | -3 | -1 | 1  | 1  | 3  | -3 | 1  | 1  | -3 | 1  | -3 | 3  | 1  | -1 |
| 3   | -3                               | -3 | -3 | -3 | -3 | -1 | 1  | 3  | -3 | -1 | 3  | -1 | 3  | 1  | -1 | -3 | 3  | -3 |
| 4   | -3                               | -3 | -3 | -3 | -3 | -1 | 3  | -3 | -1 | 1  | -1 | -3 | 3  | 3  | 1  | -3 | 1  | -1 |
| 5   | -3                               | -3 | -3 | -3 | -3 | 1  | -3 | -3 | -3 | -3 | 1  | 1  | 1  | -3 | 1  | 1  | -3 | -3 |

|    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 6  | -3 | -3 | -3 | -3 | -3 | 1  | -3 | -3 | 1  | 1  | -3 | -3 | -3 | 1  | -1 | 3  | -1 | 3  |
| 7  | -3 | -3 | -3 | -3 | -3 | 1  | -3 | -1 | 3  | -1 | 3  | 3  | -1 | -1 | 1  | 3  | 3  | -1 |
| 8  | -3 | -3 | -3 | -3 | -3 | 1  | -1 | -1 | -1 | -3 | 3  | -1 | 3  | -3 | 3  | -1 | 1  | 3  |
| 9  | -3 | -3 | -3 | -3 | -3 | 3  | -3 | 1  | -1 | 3  | -3 | 3  | 3  | -1 | -3 | 1  | 1  | -3 |
| 10 | -3 | -3 | -3 | -3 | -3 | 3  | -1 | -3 | -3 | 1  | 1  | 3  | -3 | -1 | 3  | -1 | 3  | 1  |
| 11 | -3 | -3 | -3 | -3 | -3 | 3  | 3  | -1 | -1 | -1 | 3  | 1  | -3 | 3  | -1 | 1  | -3 | 1  |
| 12 | -3 | -3 | -3 | -3 | -1 | -3 | -3 | -3 | 1  | 3  | 1  | -1 | 3  | -3 | -1 | -3 | 1  | 1  |
| 13 | -3 | -3 | -3 | -3 | -1 | -3 | -3 | 1  | -1 | -1 | 3  | -3 | -3 | 1  | 3  | 1  | -3 | 1  |
| 14 | -3 | -3 | -3 | -3 | -1 | -3 | -3 | 1  | 3  | -3 | -1 | 3  | 1  | 3  | -1 | 3  | -1 | -3 |
| 15 | -3 | -3 | -3 | -3 | -1 | -3 | -1 | 3  | -3 | 1  | -3 | 1  | -1 | -3 | -3 | 1  | 1  | 3  |
| 16 | -3 | -3 | -3 | -3 | -1 | -1 | 3  | -3 | 3  | -1 | -3 | 1  | 1  | -1 | -3 | -1 | 3  | -3 |
| 17 | -3 | -3 | -3 | -3 | -1 | -1 | 3  | -1 | -3 | 1  | 3  | -1 | -3 | -3 | 1  | 3  | -1 | 1  |
| 18 | -3 | -3 | -3 | -3 | -1 | 3  | -1 | -1 | 3  | 3  | -1 | -3 | 1  | 1  | 1  | -1 | -3 | -1 |
| 19 | -3 | -3 | -3 | -3 | -1 | 3  | 1  | -3 | -1 | -3 | 3  | 1  | -1 | 3  | -1 | 1  | 3  | -1 |
| 20 | -3 | -3 | -3 | -3 | 1  | -3 | -3 | 3  | 1  | 1  | -3 | -1 | 1  | 3  | 3  | -1 | 3  | -1 |
| 21 | -3 | -3 | -3 | -3 | 1  | -3 | 1  | 3  | 1  | -1 | -1 | 3  | 3  | -1 | 1  | 1  | -3 | 3  |
| 22 | -3 | -3 | -3 | -3 | 1  | -3 | 3  | -3 | -1 | 3  | 1  | 1  | -1 | -1 | 3  | 3  | -1 | 3  |
| 23 | -3 | -3 | -3 | -3 | 1  | -3 | 3  | -1 | 3  | -3 | -1 | -1 | -1 | 1  | -3 | -3 | 3  | 1  |
| 24 | -3 | -3 | -3 | -3 | 1  | 1  | 3  | 1  | 1  | -1 | 3  | 1  | 1  | 3  | -1 | -3 | 1  | 3  |
| 25 | -3 | -3 | -3 | -3 | 1  | 3  | 3  | 3  | 1  | -3 | 1  | -3 | -3 | 3  | -3 | 1  | -1 | -3 |
| 26 | -3 | -3 | -3 | -3 | 3  | 1  | 3  | 3  | -1 | 3  | -3 | -3 | -1 | 3  | -1 | -1 | -3 | 1  |
| 27 | -3 | -3 | -3 | -1 | -3 | -3 | -1 | -1 | -3 | 3  | 3  | 1  | -3 | -1 | -1 | 3  | 1  | -3 |
| 28 | -3 | -3 | -3 | -1 | -3 | 1  | -1 | 1  | -3 | 3  | 1  | -3 | -1 | 1  | 3  | 1  | -1 | -1 |
| 29 | -3 | -3 | -3 | -1 | -3 | 3  | 1  | 1  | -1 | -1 | 1  | 3  | 1  | -3 | 1  | -3 | -1 | 1  |

### 5.5.1.3 Group hopping

The sequence-group number  $u$  in slot  $n_s$  is defined by a group hopping pattern  $f_{gh}(n_s)$  and a sequence-shift pattern  $f_{ss}$  according to

$$u = (f_{gh}(n_s) + f_{ss}) \bmod 30$$

There are 17 different hopping patterns and 30 different sequence-shift patterns. Sequence-group hopping can be enabled or disabled by means of the cell-specific parameter *Group-hopping-enabled* provided by higher layers. Sequence-group hopping for PUSCH can be disabled for a certain UE through the higher-layer parameter *Disable-sequence-group-hopping* despite being enabled on a cell basis unless the PUSCH transmission corresponds to a Random Access Response Grant or a retransmission of the same transport block as part of the contention based random access procedure.

The group-hopping pattern  $f_{gh}(n_s)$  may be different for PUSCH, (S)PUCCH and SRS and is given by

$$f_{gh}(n_s) = \begin{cases} 0 & \text{if group hopping is disabled} \\ \left( \sum_{i=0}^7 c(8n_s + i) \cdot 2^i \right) \bmod 30 & \text{if group hopping is enabled} \end{cases}$$

where the pseudo-random sequence  $c(i)$  is defined by clause 7.2. The pseudo-random sequence generator shall be

initialized with  $c_{\text{init}} = \left\lfloor \frac{n_{\text{ID}}^{\text{RS}}}{30} \right\rfloor$  at the beginning of each radio frame where  $n_{\text{ID}}^{\text{RS}}$  is given by clause 5.5.1.5.

The sequence-shift pattern  $f_{ss}$  definition differs between PUCCH, PUSCH and SRS.

For SPUCCH/PUCCH, the sequence-shift pattern  $f_{ss}^{\text{PUCCH}}$  is given by  $f_{ss}^{\text{PUCCH}} = n_{\text{ID}}^{\text{RS}} \bmod 30$  where  $n_{\text{ID}}^{\text{RS}}$  is given by clause 5.5.1.5.

For PUSCH, the sequence-shift pattern  $f_{ss}^{\text{PUSCH}}$  is given by  $f_{ss}^{\text{PUSCH}} = (N_{\text{ID}}^{\text{cell}} + \Delta_{ss}) \bmod 30$ , where  $\Delta_{ss} \in \{0,1,\dots,29\}$  is configured by higher layers, if no value for  $n_{\text{ID}}^{\text{PUSCH}}$  is provided by higher layers or if the PUSCH transmission corresponds to a Random Access Response Grant or a retransmission of the same transport block as part of the contention based random access procedure, otherwise it is given by  $f_{ss}^{\text{PUSCH}} = n_{\text{ID}}^{\text{RS}} \bmod 30$  with  $n_{\text{ID}}^{\text{RS}}$  given by clause 5.5.1.5.

For SRS, the sequence-shift pattern  $f_{ss}^{\text{SRS}}$  is given by  $f_{ss}^{\text{SRS}} = n_{\text{ID}}^{\text{RS}} \bmod 30$  where  $n_{\text{ID}}^{\text{RS}}$  is given by clause 5.5.1.5.

#### 5.5.1.4 Sequence hopping

Sequence hopping only applies for reference-signals of length  $M_{sc}^{RS} \geq 6 N_{sc}^{RB}$ .

For reference-signals of length  $M_{sc}^{RS} < 6 N_{sc}^{RB}$ , the base sequence number  $v$  within the base sequence group is given by  $v=0$ .

For reference-signals of length  $M_{sc}^{RS} \geq 6 N_{sc}^{RB}$ , the base sequence number  $v$  within the base sequence group in slot  $n_s$  is defined by

$$v = \begin{cases} c(n_s) & \text{if group hopping is disabled and sequence hopping is enabled} \\ 0 & \text{otherwise} \end{cases}$$

where the pseudo-random sequence  $c(i)$  is given by clause 7.2. The parameter *Sequence-hopping-enabled* provided by higher layers determines if sequence hopping is enabled or not. Sequence hopping for PUSCH can be disabled for a certain UE through the higher-layer parameter *Disable-sequence-group-hopping* despite being enabled on a cell basis unless the PUSCH transmission corresponds to a Random Access Response Grant or a retransmission of the same transport block as part of the contention based random access procedure.

For PUSCH or SPUCCH/PUCCH format 4 transmission with  $\geq 6$  RBs, the pseudo-random sequence generator shall be

initialized with  $c_{init} = \left\lfloor \frac{n_{ID}^{RS}}{30} \right\rfloor \cdot 2^5 + f_{ss}^{PUSCH}$  at the beginning of each radio frame where  $n_{ID}^{RS}$  is given by clause 5.5.1.5.

For SRS, the pseudo-random sequence generator shall be initialized with  $c_{init} = \left\lfloor \frac{n_{ID}^{RS}}{30} \right\rfloor \cdot 2^5 + (n_{ID}^{RS} + \Delta_{ss}) \bmod 30$  at the beginning of each radio frame where  $n_{ID}^{RS}$  is given by clause 5.5.1.5 and  $\Delta_{ss}$  is given by clause 5.5.1.3.

#### 5.5.1.5 Determining virtual cell identity for sequence generation

The definition of  $n_{ID}^{RS}$  depends on the type of transmission.

Transmissions associated with PUSCH:

- $n_{ID}^{RS} = N_{ID}^{cell}$  if no value for  $n_{ID}^{PUSCH}$  is configured by higher layers or if the PUSCH transmission corresponds to a Random Access Response Grant or a retransmission of the same transport block as part of the contention based random access procedure,
- $n_{ID}^{RS} = n_{ID}^{PUSCH}$  otherwise.

Transmissions associated with SPUCCH/PUCCH:

- $n_{ID}^{RS} = N_{ID}^{cell}$  if no value for  $n_{ID}^{PUCCH}$  is configured by higher layers,
- $n_{ID}^{RS} = n_{ID}^{PUCCH}$  otherwise.

Basic sounding reference signals:

- $n_{ID}^{RS} = n_{ID}^{SRS}$  if the higher-layer parameter *srs-VirtualCellID* is configured and *srs-VirtualCellID-AllSRS* is configured as *TRUE*, where  $n_{ID}^{SRS}$  equals the higher-layer parameter *srs-VirtualCellID*
- $n_{ID}^{RS} = N_{ID}^{cell}$  otherwise.

Additional sounding reference signals:

- $n_{ID}^{RS} = N_{ID}^{cell}$  if no value for  $n_{ID}^{SRS}$  is configured by the higher-layer parameter *srs-VirtualCellID*
- $n_{ID}^{RS} = n_{ID}^{SRS}$  otherwise.

## 5.5.2 Demodulation reference signal

### 5.5.2.1 Demodulation reference signal for PUSCH

#### 5.5.2.1.1 Reference signal sequence

The PUSCH demodulation reference signal sequence  $r_{\text{PUSCH}}^{(\lambda)}(\cdot)$  associated with layer  $\lambda \in \{0, 1, \dots, v-1\}$  is defined by

$$r_{\text{PUSCH}}^{(\lambda)}(m \cdot M_{\text{sc}}^{\text{RS}} + n) = w^{(\lambda)}(m) r_{u,v}^{(\alpha_i, \delta)}(n)$$

where

$$m = \begin{cases} 0 & \text{for special subframe and (sub)slot - PUSCH} \\ 0, 1 & \text{otherwise} \end{cases}$$

$$n = 0, \dots, M_{\text{sc}}^{\text{RS}} - 1$$

and  $M_{\text{sc}}^{\text{RS}} = M_{\text{sc}}^{\text{PUSCH}} / 2$  if

- the higher-layer parameter *ul-DMRS-IFDMA* is set and the most recent uplink-related DCI contains the *Cyclic Shift Field mapping table for DMRS bit* field which is set to 1 to indicate the use of Table 5.5.2.1.1-3, or,
- the *Cyclic Shift Field mapping table for DMRS bit* field is set to 1 in the most recent uplink-related DCI format 7 which indicates the use of Table 5.5.2.1.1-4, or,
- subslot-PUSCH/slot-PUSCH for the transport block is semi-persistently scheduled (i.e. higher layer parameter *sps-ConfigUL-STTI* is configured, see TS 36.331 [9]), and *ifdma-Config-SPS* is set.

In all other cases,  $M_{\text{sc}}^{\text{RS}} = M_{\text{sc}}^{\text{PUSCH}}$ .

Clause 5.5.1 defines the sequence  $r_{u,v}^{(\alpha_i, \delta)}(0), \dots, r_{u,v}^{(\alpha_i, \delta)}(M_{\text{sc}}^{\text{RS}} - 1)$  where, for PUSCH demodulation reference signal sequence,  $\delta=1$  when

- the higher-layer parameter *ul-DMRS-IFDMA* is set and the most recent uplink-related DCI contains the *Cyclic Shift Field mapping table for DMRS bit* field which is set to 1 to indicate the use of Table 5.5.2.1.1-3, or,
- the *Cyclic Shift Field mapping table for DMRS bit* field is set to 1 in the most recent uplink-related DCI format 7 which indicates the use of Table 5.5.2.1.1-4, or,
- subslot-PUSCH/slot-PUSCH for the transport block is semi-persistently scheduled (i.e. higher layer parameter *sps-ConfigUL-STTI* is configured, see TS 36.331 [9]), and *ifdma-Config-SPS* is set.

In all other cases,  $\delta=0$ .

The orthogonal sequence  $w^{(\lambda)}(m)$  is given by  $w^{(\lambda)}(m) = 1$  for subslot-PUSCH/slot-PUSCH. In all other cases, it is given by  $\begin{bmatrix} w^{(\lambda)}(0) & w^{(\lambda)}(1) \end{bmatrix} = \begin{bmatrix} 1 & 1 \end{bmatrix}$  for DCI format 0 if the higher-layer parameter *Activate-DMRS-with OCC* is not set or if the temporary C-RNTI was used to transmit the most recent uplink-related DCI for the transport block associated with the corresponding PUSCH transmission. Otherwise,

- if higher-layer parameter *ul-DMRS-IFDMA* is not set,  $w^{(\lambda)}(m)$  is given by Table 5.5.2.1.1-1 using the cyclic shift field in the most recent uplink-related DCI [3],
- if higher-layer parameter *ul-DMRS-IFDMA* is set and the *Cyclic Shift Field mapping table for DMRS bit* field is not present in the most recent uplink-related DCI,  $w^{(\lambda)}(m)$  is given by Table 5.5.2.1.1-1 using the cyclic shift field in the most recent uplink-related DCI,
- if higher-layer parameter *ul-DMRS-IFDMA* is set and the *Cyclic Shift Field mapping table for DMRS bit* field is present in the most recent uplink-related DCI,  $w^{(\lambda)}(m)$  is given by Table 5.5.2.1.1-1 using the cyclic shift field

in the most recent uplink-related DCI when the *Cyclic Shift Field mapping table for DMRS bit* field is set to 0, and

- if higher-layer parameter *ul-DMRS-IFDMA* is set and the *Cyclic Shift Field mapping table for DMRS bit* field is present in the most recent uplink-related DCI,  $w^{(\lambda)}(m)$  is given by Table 5.5.2.1.1-3 using the cyclic shift field in the most recent uplink-related DCI when the *Cyclic Shift Field mapping table for DMRS bit* field is set to 1.

The cyclic shift  $\alpha_\lambda$  in a slot  $n_s$  is given as  $\alpha_\lambda = 0$  if the ul-V-SPS-RNTI-r14 was used to transmit the most recent uplink-related DCI for the transport block associated with the corresponding PUSCH transmission. For PUSCH transmissions not using sub-PRB allocations, if *pusch-CyclicShift* in higher layer parameter *PUR-PUSCH-Config* is configured, then for PUSCH (re)transmission corresponding to preconfigured uplink resource it provides the value of  $n_{cs,\lambda}$  and the cyclic shift  $\alpha_\lambda$  in a slot  $n_s$  is given as  $\alpha_\lambda = 2\pi n_{cs,\lambda}/12$ .

Otherwise, the cyclic shift  $\alpha_\lambda$  in a slot  $n_s$  is given as  $\alpha_\lambda = 2\pi n_{cs,\lambda}/12$  with

$$n_{cs,\lambda} = (n_{\text{DMRS}}^{(1)} + n_{\text{DMRS},\lambda}^{(2)} + (1 + \delta)n_{\text{PN}}(n_s)) \bmod 12$$

where the value of  $n_{\text{DMRS}}^{(1)}$  is given by Table 5.5.2.1.1-2 according to the parameter *cyclicShift* provided by higher layers. For non-BL/CE UEs  $n_{\text{DMRS},\lambda}^{(2)}$  is given using the most recent uplink-related DCI TS 36.212 [3] for the transport block associated with the corresponding PUSCH transmission, except for subslot-PUSCH/slot-PUSCH, as follows:

- if the higher-layer parameter *ul-DMRS-IFDMA* is not set,  $n_{\text{DMRS},\lambda}^{(2)}$  is given by Table 5.5.2.1.1-1 using the cyclic shift field in the most recent uplink-related DCI,
- if higher-layer parameter *ul-DMRS-IFDMA* is set and the *Cyclic Shift Field mapping table for DMRS bit* field is not present in the most recent uplink-related DCI,  $n_{\text{DMRS},\lambda}^{(2)}$  is given by Table 5.5.2.1.1-1 using the cyclic shift field in the most recent uplink-related DCI,
- if higher-layer parameter *ul-DMRS-IFDMA* is set and the *Cyclic Shift Field mapping table for DMRS bit* field is present in the most recent uplink-related DCI,  $n_{\text{DMRS},\lambda}^{(2)}$  is given by Table 5.5.2.1.1-1 using the cyclic shift field in the most recent uplink-related DCI when the *Cyclic Shift Field mapping table for DMRS bit* field is set to 0, and
- if higher-layer parameter *ul-DMRS-IFDMA* is set and the *Cyclic Shift Field mapping table for DMRS bit* field is present in the most recent uplink-related DCI,  $n_{\text{DMRS},\lambda}^{(2)}$  is given by Table 5.5.2.1.1-3 using the cyclic shift field in the most recent uplink-related DCI when the *Cyclic Shift Field mapping table for DMRS bit* field is set to 1.

For subslot-PUSCH/slot-PUSCH for non-BL/CE UEs,  $n_{\text{DMRS},\lambda}^{(2)}$  is given by Table 5.5.2.1.1-4, using the cyclic shift field in the most recent uplink-related DCI. If the *Cyclic Shift Field mapping table for DMRS bit* field is set to 0,  $\varpi$  in Table 5.5.2.1.1-4 is ignored. If the *Cyclic Shift Field mapping table for DMRS bit* field is set to 1, both  $n_{\text{DMRS},\lambda}^{(2)}$  and  $\varpi$  are given by Table 5.5.2.1.1-4.

For BL/CE UEs, a cyclic shift field of '000' shall be assumed when determining  $n_{\text{DMRS},\lambda}^{(2)}$  from Table 5.5.2.1.1-1.

For subframe-based PUSCH transmission, the first row of Table 5.5.2.1.1-1 shall be used to obtain  $n_{\text{DMRS},0}^{(2)}$  and  $w^{(\lambda)}(m)$  if there is no uplink-related DCI for the same transport block associated with the corresponding PUSCH transmission, and

- if the initial PUSCH for the same transport block is semi-persistently scheduled and *cyclicShiftSPS* is not configured, or
- if the initial PUSCH for the same transport block is scheduled by the random-access response grant.

An exception applies if subframe-based PUSCH for the transport block is semi-persistently scheduled and the higher-layer parameter *cyclicShiftSPS* is configured. In this case, the value of  $n_{\text{DMRS},0}^{(2)}$  is given by Table 5.5.2.1.1-1 according to the higher-layer parameter *cyclicShiftSPS*.

An exception applies if subslot-PUSCH/slot-PUSCH for the transport block is semi-persistently scheduled (see TS 36.331, *sps-ConfigUL-sTTI*). In this case:

- $n_{\text{DMRS},0}^{(2)}$  is given by Table 5.5.2.1.1-1 according to the higher-layer parameter *cyclicShiftSPS-STTI* if the higher layer parameter *ifdma-Config-SPS* is not set, and,
- $n_{\text{DMRS},0}^{(2)}$  and  $\varpi$  are given by Table 5.5.2.1.1-3 according to the higher-layer parameter *cyclicShiftSPS-STTI* if the higher layer parameter *ifdma-Config-SPS* is set.

The quantity  $n_{\text{PN}}(n_s)$  is given by

$$n_{\text{PN}}(n_s) = \sum_{i=0}^7 c(8N_{\text{symb}}^{\text{UL}} \cdot n_s + i) \cdot 2^i$$

where the pseudo-random sequence  $c(i)$  is defined by clause 7.2. The application of  $c(i)$  is cell-specific. The pseudo-random sequence generator shall be initialized with  $c_{\text{init}}$  at the beginning of each radio frame. The quantity  $c_{\text{init}}$  is

given by  $c_{\text{init}} = \left\lfloor \frac{N_{\text{ID}}^{\text{cell}}}{30} \right\rfloor \cdot 2^5 + \left( (N_{\text{ID}}^{\text{cell}} + \Delta_{\text{ss}}) \bmod 30 \right)$  if no value for  $N_{\text{ID}}^{\text{csh\_DMRS}}$  is configured by higher layers for

PUSCH/(S)PUCCH format 4/PUCCH format 5 or the PUSCH transmission corresponds to a Random Access Response Grant or a retransmission of the same transport block as part of the contention based random access procedure,

otherwise it is given by  $c_{\text{init}} = \left\lfloor \frac{N_{\text{ID}}^{\text{csh\_DMRS}}}{30} \right\rfloor \cdot 2^5 + (N_{\text{ID}}^{\text{csh\_DMRS}} \bmod 30)$ .

The vector of reference signals shall be precoded according to

$$\begin{bmatrix} \tilde{r}_{\text{PUSCH}}^{(0)} \\ \vdots \\ \tilde{r}_{\text{PUSCH}}^{(P-1)} \end{bmatrix} = W \begin{bmatrix} r_{\text{PUSCH}}^{(0)} \\ \vdots \\ r_{\text{PUSCH}}^{(v-1)} \end{bmatrix}$$

where  $P$  is the number of antenna ports used for PUSCH transmission.

For PUSCH transmission using a single antenna port,  $P=1$ ,  $W=1$  and  $v=1$ .

For spatial multiplexing,  $P=2$  or  $P=4$  and the precoding matrix  $W$  shall be identical to the precoding matrix used in clause 5.3.3A.2 for precoding of the PUSCH in the same subframe.

**Table 5.5.2.1.1-1: Mapping of Cyclic Shift Field in uplink-related DCI format to  $n_{\text{DMRS},\lambda}^{(2)}$  and**

$$\begin{bmatrix} w^{(\lambda)}(0) & w^{(\lambda)}(1) \end{bmatrix}$$

| Cyclic Shift Field in uplink-related DCI format [3] | $n_{\text{DMRS},\lambda}^{(2)}$ |               |               |               | $\begin{bmatrix} w^{(\lambda)}(0) & w^{(\lambda)}(1) \end{bmatrix}$ |                                        |                                        |                                        |
|-----------------------------------------------------|---------------------------------|---------------|---------------|---------------|---------------------------------------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|
|                                                     | $\lambda = 0$                   | $\lambda = 1$ | $\lambda = 2$ | $\lambda = 3$ | $\lambda = 0$                                                       | $\lambda = 1$                          | $\lambda = 2$                          | $\lambda = 3$                          |
| 000                                                 | 0                               | 6             | 3             | 9             | $\begin{bmatrix} 1 & 1 \end{bmatrix}$                               | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ |
| 001                                                 | 6                               | 0             | 9             | 3             | $\begin{bmatrix} 1 & -1 \end{bmatrix}$                              | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  |
| 010                                                 | 3                               | 9             | 6             | 0             | $\begin{bmatrix} 1 & -1 \end{bmatrix}$                              | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  |

|     |    |    |    |    |                                        |                                        |                                        |                                        |
|-----|----|----|----|----|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|
| 011 | 4  | 10 | 7  | 1  | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  |
| 100 | 2  | 8  | 5  | 11 | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  |
| 101 | 8  | 2  | 11 | 5  | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ |
| 110 | 10 | 4  | 1  | 7  | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ |
| 111 | 9  | 3  | 0  | 6  | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ |

Table 5.5.2.1.1-2: Mapping of *cyclicShift* to  $n_{\text{DMRS}}^{(1)}$  values

| cyclicShift | $n_{\text{DMRS}}^{(1)}$ |
|-------------|-------------------------|
| 0           | 0                       |
| 1           | 2                       |
| 2           | 3                       |
| 3           | 4                       |
| 4           | 6                       |
| 5           | 8                       |
| 6           | 9                       |
| 7           | 10                      |

Table 5.5.2.1.1-3: Mapping of Cyclic Shift Field in uplink-related DCI format to  $n_{\text{DMRS}\lambda}^{(2)}$ ,  $\varpi$ , and

$$\begin{bmatrix} w^{(\lambda)}(0) & w^{(\lambda)}(1) \end{bmatrix}$$

| Cyclic Shift Field in<br>uplink-related DCI format [3] | $\varpi$ | $n_{\text{DMRS}\lambda}^{(2)}$ |             |             |             | $\begin{bmatrix} w^{(\lambda)}(0) & w^{(\lambda)}(1) \end{bmatrix}$ |                                        |                                        |                                        |
|--------------------------------------------------------|----------|--------------------------------|-------------|-------------|-------------|---------------------------------------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|
|                                                        |          | $\lambda=0$                    | $\lambda=1$ | $\lambda=2$ | $\lambda=3$ | $\lambda=0$                                                         | $\lambda=1$                            | $\lambda=2$                            | $\lambda=3$                            |
| 000                                                    | 1        | 0                              | 6           | 3           | 9           | $\begin{bmatrix} 1 & 1 \end{bmatrix}$                               | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ |
| 001                                                    | 1        | 6                              | 0           | 9           | 3           | $\begin{bmatrix} 1 & -1 \end{bmatrix}$                              | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  |
| 010                                                    | 1        | 3                              | 9           | 6           | 0           | $\begin{bmatrix} 1 & -1 \end{bmatrix}$                              | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  |
| 011                                                    | 0        | 4                              | 10          | 7           | 1           | $\begin{bmatrix} 1 & 1 \end{bmatrix}$                               | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  |
| 100                                                    | 0        | 2                              | 8           | 5           | 11          | $\begin{bmatrix} 1 & 1 \end{bmatrix}$                               | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  |
| 101                                                    | 0        | 8                              | 2           | 11          | 5           | $\begin{bmatrix} 1 & -1 \end{bmatrix}$                              | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ |
| 110                                                    | 0        | 10                             | 4           | 1           | 7           | $\begin{bmatrix} 1 & -1 \end{bmatrix}$                              | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ |
| 111                                                    | 1        | 9                              | 3           | 0           | 6           | $\begin{bmatrix} 1 & 1 \end{bmatrix}$                               | $\begin{bmatrix} 1 & 1 \end{bmatrix}$  | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ | $\begin{bmatrix} 1 & -1 \end{bmatrix}$ |

Table 5.5.2.1.1-4:  $n_{\text{DMRS}\lambda}^{(2)}$  for subslot-PUSCH/slot-PUSCH

| Cyclic Shift Field in<br>uplink-related DCI format [3] | $n_{\text{DMRS}, \lambda}^{(2)}$ |             |             |             | $\varpi$    |             |             |             |
|--------------------------------------------------------|----------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
|                                                        | $\lambda=0$                      | $\lambda=1$ | $\lambda=2$ | $\lambda=3$ | $\lambda=0$ | $\lambda=1$ | $\lambda=2$ | $\lambda=3$ |
| 0                                                      | 0                                | 6           | 3           | 9           | 0           | 0           | 1           | 1           |
| 1                                                      | 6                                | 0           | 9           | 3           | 1           | 1           | 0           | 0           |

### 5.5.2.1.2 Mapping to physical resources

For each antenna port used for transmission of the PUSCH, the sequence  $\tilde{r}_{\text{PUSCH}}^{(\tilde{p})}(\cdot)$  shall be multiplied with the amplitude scaling factor  $\sqrt{1+\delta}\beta_{\text{PUSCH}}$  and mapped in sequence starting with  $\tilde{r}_{\text{PUSCH}}^{(\tilde{p})}(0)$  to the resource blocks.

- $\delta=1$  when either
  - the higher-layer parameter *ul-DMRS-IFDMA* is set and the most recent uplink-related DCI contains the *Cyclic Shift Field mapping table for DMRS bit* field which is set to 1 to indicate the use of Table 5.5.2.1.1-3, or
  - the *Cyclic Shift Field mapping table for DMRS bit* field is set to 1 in the most recent uplink-related DCI format 7 which indicates the use of Table 5.5.2.1.1-4, and
- $\delta=0$  otherwise.

If higher-layer parameter *ul-DMRS-IFDMA* is set and the most recent uplink-related DCI contains the *Cyclic Shift Field mapping table for DMRS bit* field which is set to 1 to indicate the use of Table 5.5.2.1.1-3, the mapping to resource elements  $(k,l)$ , with  $l=3$  for normal cyclic prefix and  $l=2$  for extended cyclic prefix, in the subframe shall be in increasing order of first  $k$  for all values of  $k$  satisfying  $k \bmod 2 = \varnothing$ , then the slot number. The quantity  $\varnothing$  is given by Table 5.5.2.1.1-3 using the cyclic shift field in the most recent uplink-related DCI.

In case of slot-PUSCH, the mapping to resource elements  $(k,l)$ , with  $l=3$  for normal cyclic prefix, in the slot of the subframe where slot-PUSCH is transmitted shall be in increasing order of first  $k$  for all values of  $k$ , except if the *Cyclic Shift Field mapping table for DMRS bit* field is set to 1 in the most recent uplink-related DCI format 7, which indicates the use of Table 5.5.2.1.1-4. In this case the mapping to resource element shall be in increasing order of first  $k$  only for values of  $k$  satisfying  $k \bmod 2 = \varnothing$ .

In case of subslot-PUSCH, the mapping to resource elements  $(k,l)$ , in the subframe shall be in increasing order of first  $k$  for all values of  $k$ , except if the *Cyclic Shift Field mapping table for DMRS bit* field is set to 1 in the most recent uplink-related DCI format 7, which indicates the use of Table 5.5.2.1.1-4. In this case the mapping to resource element shall be in increasing order of first  $k$  only for values of  $k$  satisfying  $k \bmod 2 = \varnothing$ . The value of  $l$  depends on the uplink subslot number and the *DMRS-pattern* field in the most recent uplink-related DCI, according to Table 5.5.2.1.2-1, or according to Table 5.5.2.1.2-2 in case of semi-persistent scheduling of subslot-PUSCH (i.e. higher layer parameter *sps-ConfigUL-STTI-r15* is configured, see TS 36.331 [9]) and with a configured periodicity of 1 subslot (i.e. *semiPersistSchedIntervalUL-STTI-r15* set to *STTI1*). In case of subslot-PUSCH and semi-persistent scheduling with a configured periodicity longer than 1 subslot, the mapping shall start at symbol  $l$  according to the first row of Table 5.5.2.1.2-2 (i.e. equivalent to a signalling of *DMRS-pattern* field set to '00'). In case no value of  $l$  is defined for the uplink subslot number, and in case no valid starting symbol index (see table 5.3.4-1), no reference signal is transmitted associated with the uplink-related DCI format.

**Table 5.5.2.1.2-1: The quantity  $l$  for subslot-PUSCH**

| <i>DMRS-pattern</i> field in uplink-related DCI format [3] | Uplink subslot number |    |    |    |    |    |
|------------------------------------------------------------|-----------------------|----|----|----|----|----|
|                                                            | #0                    | #1 | #2 | #3 | #4 | #5 |
| 00                                                         | 0                     | 3  | 5  | 0  | 2  | 4  |
| 01                                                         | 2                     | 4  | -  | 1  | 3  | -  |
| 10                                                         | -                     | -  | -  | 2  | -  | -  |
| 11                                                         | -                     | 5  | -  | -  | 4  | -  |

**Table 5.5.2.1.2-2: The quantity  $l$  for subslot-PUSCH for semi-persistent scheduling**

| <i>DMRS-pattern</i> field in uplink-related DCI format [3] | Uplink subslot number |    |    |    |    |    |
|------------------------------------------------------------|-----------------------|----|----|----|----|----|
|                                                            | #0                    | #1 | #2 | #3 | #4 | #5 |
| 00                                                         | 0                     | 3  | 5  | 0  | 2  | 4  |
| 10                                                         | 0                     | 5  | 5  | 2  | 2  | 4  |

For all other cases, the set of physical resource blocks used in the mapping process and the relation between the index  $\tilde{p}$  and the antenna port number  $p$  shall be identical to the corresponding PUSCH transmission as defined in clause 5.3.4.

The mapping to resource elements  $(k, l)$ , with  $l = 3$ , or with  $l$  according to Table 5.5.2.1.2-1 for subslot-PUSCH, for normal cyclic prefix and  $l = 2$  for extended cyclic prefix, in the subframe shall be in increasing order of first  $k$ , then the slot number, except for slot-PUSCH and subslot-PUSCH where the reference signal is only mapped to the slot where the slot-PUSCH/subslot-PUSCH is transmitted). No DM-RS shall be transmitted in UpPTS if *dmrsLess-UpPts* is set to true.

For BL/CE UEs, if uplink resource reservation is enabled for the UE as specified in [9], and the Resource reservation field in the DCI is set to 1, then in case of PUSCH transmission with  $N_{\text{rep}}^{\text{PUSCH}} > 1$  associated with C-RNTI or SPS C-RNTI using UE-specific MPDCCH search space including PUSCH transmission without a corresponding MPDCCH,

- In a subframe that is fully reserved as defined in clause 8.0 in [4], the demodulation reference signal transmission is postponed until the next BL/CE uplink subframe that is not fully reserved.
- In a subframe that is partially reserved, the demodulation reference signal transmission in a SC-FDMA symbol that is reserved is dropped.

### 5.5.2.1A Demodulation reference signal for PUSCH with sub-PRB allocations

#### 5.5.2.1A.1 Reference signal sequence using modulation schemes other than $\pi/2$ -BPSK

The reference signal sequence  $r_{\text{PUSCH}}(n)$  for  $M_{\text{sc}}^{\text{RU}} > 1$  is defined by a cyclic shift  $\alpha$  of a base sequence according to

$$r_{\text{PUSCH}}(n) = e^{j\alpha n} e^{j\phi(n)\pi/4}$$

$$0 \leq n < M_{\text{sc}}^{\text{RU}},$$

where  $\phi(n)$  is given by Tables 5.5.2.1A.1-1 and 5.5.2.1A.1-2 for  $M_{\text{sc}}^{\text{RU}} = 3$  and  $M_{\text{sc}}^{\text{RU}} = 6$ , respectively. The cyclic shift  $\alpha$  is derived from higher layer parameters *threeTone-CyclicShift* and *sixTone-CyclicShift*, respectively, as defined in Table 5.5.2.1A.1-3.

If group hopping is enabled, the base sequence index  $u$  is given by clause 5.5.2.1A.3.

If group hopping is not enabled, the base sequence index  $u$  is given by

- $N_{\text{ID}}^{\text{cell}} \bmod 12$  for  $M_{\text{sc}}^{\text{RU}} = 3$
- $N_{\text{ID}}^{\text{cell}} \bmod 14$  for  $M_{\text{sc}}^{\text{RU}} = 6$

**Table 5.5.2.1A.1-1: Definition of  $\phi(n)$  for  $M_{\text{sc}}^{\text{RU}} = 3$**

| $u$ | $\phi(0), \dots, \phi(2)$ |    |    |
|-----|---------------------------|----|----|
| 0   | 1                         | -3 | -3 |
| 1   | 1                         | -3 | -1 |
| 2   | 1                         | -3 | 3  |
| 3   | 1                         | -1 | -1 |
| 4   | 1                         | -1 | 1  |
| 5   | 1                         | -1 | 3  |
| 6   | 1                         | 1  | -3 |
| 7   | 1                         | 1  | -1 |
| 8   | 1                         | 1  | 3  |
| 9   | 1                         | 3  | -1 |
| 10  | 1                         | 3  | 1  |
| 11  | 1                         | 3  | 3  |

**Table 5.5.2.1A.1-2: Definition of  $\phi(n)$  for  $M_{sc}^{RU} = 6$** 

| $u$ | $\phi(0), \dots, \phi(5)$ |    |    |    |    |    |
|-----|---------------------------|----|----|----|----|----|
| 0   | 1                         | 1  | 1  | 1  | 3  | -3 |
| 1   | 1                         | 1  | 3  | 1  | -3 | 3  |
| 2   | 1                         | -1 | -1 | -1 | 1  | -3 |
| 3   | 1                         | -1 | 3  | -3 | -1 | -1 |
| 4   | 1                         | 3  | 1  | -1 | -1 | 3  |
| 5   | 1                         | -3 | -3 | 1  | 3  | 1  |
| 6   | -1                        | -1 | 1  | -3 | -3 | -1 |
| 7   | -1                        | -1 | -1 | 3  | -3 | -1 |
| 8   | 3                         | -1 | 1  | -3 | -3 | 3  |
| 9   | 3                         | -1 | 3  | -3 | -1 | 1  |
| 10  | 3                         | -3 | 3  | -1 | 3  | 3  |
| 11  | -3                        | 1  | 3  | 1  | -3 | -1 |
| 12  | -3                        | 1  | -3 | 3  | -3 | -1 |
| 13  | -3                        | 3  | -3 | 1  | 1  | -3 |

**Table 5.5.2.1A.1-3: Definition of  $\alpha$** 

| $M_{sc}^{RU} = 3$<br><i>threeTone-CyclicShift</i> |          | $M_{sc}^{RU} = 6$<br><i>sixTone-CyclicShift</i> |          |
|---------------------------------------------------|----------|-------------------------------------------------|----------|
|                                                   | $\alpha$ |                                                 | $\alpha$ |
| 0                                                 | 0        | 0                                               | 0        |
| 1                                                 | $2\pi/3$ | 1                                               | $2\pi/6$ |
| 2                                                 | $4\pi/3$ | 2                                               | $4\pi/6$ |
| -                                                 | -        | 3                                               | $8\pi/6$ |

### 5.5.2.1A.2 Reference signal sequence using $\pi/2$ -BPSK modulation scheme

For  $M_{sc}^{RU} = 3$  using  $\pi/2$ -BPSK modulation scheme,  $N_{ID}^{cell} \bmod 2$  is used to determine which 2 of 3 subcarriers will be used:

- 0 indicates that the two subcarriers having the lowest indices among the three allocated are utilized.
- 1 indicates that the two subcarriers having the highest indices among the three allocated are utilized.

The reference signal sequences  $\bar{r}_{u1}(n)$  and  $\bar{r}_{u2}(n)$  for  $M_{sc}^{RU} = 3$  using 2 out of 3 subcarriers are defined by

$$\bar{r}_{u1}(n) = \frac{1}{\sqrt{2}}(1+j)(1-2c(n))w(n \bmod 16), \quad 0 \leq n < N_{rep}^{PUSCH}M_{slots}^{UL}M_{RU}$$

$$\bar{r}_{u2}(n) = (-1)^n \left( \frac{1}{\sqrt{2}}(1+j)(1-2c(n))w(n \bmod 16) \right), \quad 0 \leq n < N_{rep}^{PUSCH}M_{slots}^{UL}M_{RU}$$

where the binary sequence  $c(n)$  is defined by clause 7.2 and shall be initialised with  $c_{init} = 35$  at the start of the PUSCH transmission using sub-PRB allocations for BL/CE UEs. The quantity  $w(n)$  is given by Table 5.5.2.1A.2-1 where  $u = N_{ID}^{cell} \bmod 16$  if group hopping is not enabled, and by clause 5.5.2.1A.3 if group hopping is enabled for PUSCH using sub-PRB allocations for BL/CE UEs.

**Table 5.5.2.1A.2-1: Definition of  $w(n)$** 

| $u$ | $w(0), \dots, w(15)$ |    |    |    |    |    |    |    |   |    |    |    |    |    |    |    |
|-----|----------------------|----|----|----|----|----|----|----|---|----|----|----|----|----|----|----|
| 0   | 1                    | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1 | 1  | 1  | 1  | 1  | 1  | 1  | 1  |
| 1   | 1                    | -1 | 1  | -1 | 1  | -1 | 1  | -1 | 1 | -1 | 1  | -1 | 1  | -1 | 1  | -1 |
| 2   | 1                    | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1 | 1  | -1 | -1 | 1  | 1  | -1 | -1 |
| 3   | 1                    | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1 | -1 | -1 | 1  | 1  | -1 | -1 | 1  |
| 4   | 1                    | 1  | 1  | 1  | -1 | -1 | -1 | -1 | 1 | 1  | 1  | 1  | -1 | -1 | -1 | -1 |
| 5   | 1                    | -1 | 1  | -1 | -1 | 1  | -1 | 1  | 1 | -1 | 1  | -1 | -1 | 1  | -1 | 1  |
| 6   | 1                    | 1  | -1 | -1 | -1 | -1 | 1  | 1  | 1 | 1  | -1 | -1 | -1 | -1 | 1  | 1  |

|    |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 7  | 1 | -1 | -1 | 1  | -1 | 1  | 1  | -1 | 1  | -1 | -1 | 1  | -1 | 1  | 1  | -1 |
| 8  | 1 | 1  | 1  | 1  | 1  | 1  | 1  | 1  | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 |
| 9  | 1 | -1 | 1  | -1 | 1  | -1 | 1  | -1 | -1 | 1  | -1 | 1  | -1 | 1  | -1 | 1  |
| 10 | 1 | 1  | -1 | -1 | 1  | 1  | -1 | -1 | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  |
| 11 | 1 | -1 | -1 | 1  | 1  | -1 | -1 | 1  | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 |
| 12 | 1 | 1  | 1  | 1  | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | 1  | 1  | 1  | 1  |
| 13 | 1 | -1 | 1  | -1 | -1 | 1  | -1 | 1  | -1 | 1  | -1 | 1  | 1  | -1 | 1  | -1 |
| 14 | 1 | 1  | -1 | -1 | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | 1  | 1  | -1 | -1 |
| 15 | 1 | -1 | -1 | 1  | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | 1  | -1 | -1 | 1  |

The reference signal sequences for PUSCH using sub-PRB allocations for BL/CE UEs is given by clause 5.3.3, where  $\bar{r}_{u1}(n)$  and  $\bar{r}_{u2}(n)$  correspond to the complex-valued symbols at the input of the transform precoding. The resulting complex-valued symbols at the output of the transform precoding correspond to the sequence  $r(\cdot)$  which is mapped to physical resources as described in clause 5.5.2.1A.4.

### 5.5.2.1A.3 Group hopping

For the reference signal for PUSCH transmission using sub-PRB allocations for BL/CE UEs, sequence-group hopping can be enabled where the sequence-group number  $u$  in slot  $n_s$  of a radio frame  $n_f$  is defined by a group hopping pattern  $f_{gh}(n')$  and a sequence-shift pattern  $f_{ss}$  according to

$$u = (f_{gh}(n') + f_{ss}) \bmod M_{\text{seq}}^{\text{RU}}$$

where the number of reference signal sequences available for each resource unit size,  $M_{\text{seq}}^{\text{RU}}$  is given by Table 5.5.2.1A.3-1.

**Table 5.5.2.1A.3-1: Definition of  $M_{\text{seq}}^{\text{RU}}$**

| Modulation Scheme | $M_{\text{sc}}^{\text{RU}}$ | $M_{\text{seq}}^{\text{RU}}$ |
|-------------------|-----------------------------|------------------------------|
| $\pi/2$ -BPSK     | 3                           | 16                           |
| QPSK              | 3                           | 12                           |
|                   | 6                           | 14                           |

Sequence-group hopping can be enabled or disabled as described in clause 5.5.1.3.

The group-hopping pattern  $f_{gh}(n')$  is given by

$$f_{gh}(n') = (\sum_{i=0}^7 c(8n' + i) \cdot 2^i) \bmod M_{\text{seq}}^{\text{RU}}$$

where  $n' = n_s$  for  $M_{\text{sc}}^{\text{RU}} > 1$  using QPSK modulation scheme. When  $M_{\text{sc}}^{\text{RU}} = 3$  using  $\pi/2$ -BPSK modulation scheme, for frame structure type 1,  $n'$  is the slot number  $n_s$  of the first slot of the resource unit, and for frame structure type 2,  $n'$  is the frame number  $n_f$  of the first slot of the resource unit. The pseudo-random sequence  $c(i)$  is defined by clause 7.2.

The pseudo-random sequence generator shall be initialized with  $c_{\text{init}} = \lfloor N_{\text{ID}}^{\text{cell}} / M_{\text{seq}}^{\text{RU}} \rfloor$  at the beginning of the resource unit for  $M_{\text{sc}}^{\text{RU}} = 3$  using  $\pi/2$ -BPSK modulation scheme and in every even slot for  $M_{\text{sc}}^{\text{RU}} > 1$  using QPSK modulation scheme.

The sequence-shift pattern  $f_{ss}$  is given by

$$f_{ss}(n_s) = (N_{\text{ID}}^{\text{cell}} + \Delta_{ss}) \bmod M_{\text{seq}}^{\text{RU}}$$

where  $\Delta_{ss} = 0$ .

### 5.5.2.1A.4 Mapping to physical resources

The sequence  $r(\cdot)$  shall be multiplied with the amplitude scaling factor  $\beta_{\text{PUSCH}}$  and mapped in sequence starting with  $r(0)$  to the sub-carriers.

The set of sub-carriers used in the mapping process shall be identical to the corresponding PUSCH transmissions using sub-PRB allocations for BL/CE UEs as defined in clause 5.3.4.

The mapping to resource elements  $(k, l)$  shall be in increasing order of first  $k$ , then  $l$ , and finally the slot number. The value of the symbol index  $l$  in a slot is 3.

For BL/CE UEs, if uplink resource reservation is enabled for the UE as specified in [9], and the Resource reservation field in the DCI is set to 1, then in case of PUSCH transmission with  $N_{\text{rep}}^{\text{PUSCH}} > 1$  associated with C-RNTI or SPS C-RNTI using UE-specific MPDCCH search space including PUSCH transmission without a corresponding MPDCCH,

- In a subframe that is fully reserved as defined in clause 8.0 in [4], the demodulation reference signal transmission is postponed until the next BL/CE uplink subframe that is not fully reserved.
- In a subframe that is partially reserved, the demodulation reference signal transmission in a SC-FDMA symbol that is reserved is dropped.

## 5.5.2.2 Demodulation reference signal for PUCCH

### 5.5.2.2.1 Reference signal sequence

The PUCCH demodulation reference signal sequence  $r_{\text{PUCCH}}^{(\tilde{p})}(\cdot)$  for PUCCH formats 1, 1a, 1b, 2, 2a, 2b, and 3 is defined by

$$r_{\text{PUCCH}}^{(\tilde{p})}(m' N_{\text{RS}}^{\text{PUCCH}} M_{\text{sc}}^{\text{RS}} + m M_{\text{sc}}^{\text{RS}} + n) = \frac{1}{\sqrt{P}} \bar{w}^{(\tilde{p})}(m) z(m) r_{u,v}^{(\alpha_{\tilde{p}}, \delta)}(n)$$

where

$$\begin{aligned} m &= 0, \dots, N_{\text{RS}}^{\text{PUCCH}} - 1 \\ n &= 0, \dots, M_{\text{sc}}^{\text{RS}} - 1 \\ m' &= 0, 1 \end{aligned}$$

and  $p$  is the number of antenna ports used for PUCCH transmission. For PUCCH formats 2a and 2b,  $z(m)$  equals  $d(10)$  for  $m = 1$ , where  $d(10)$  is defined in clause 5.4.2. For all other cases,  $z(m) = 1$ .

The sequence  $r_{u,v}^{(\alpha_{\tilde{p}})}(n)$  is given by clause 5.5.1 with  $M_{\text{sc}}^{\text{RS}} = 12$  and  $\delta = 0$  where the expression for the cyclic shift  $\alpha_{\tilde{p}}$  is determined by the PUCCH format.

For PUCCH formats 1, 1a and 1b,  $\alpha_{\tilde{p}}(n_s, l)$  is given by

$$\begin{aligned} \bar{n}_{\text{oc}}^{(\tilde{p})}(n_s) &= \left\lfloor n_{\tilde{p}}'(n_s) \cdot \Delta_{\text{shift}}^{\text{PUCCH}} / N' \right\rfloor \\ \alpha_{\tilde{p}}(n_s, l) &= 2\pi \cdot \bar{n}_{\text{cs}}^{(\tilde{p})}(n_s, l) / N_{\text{sc}}^{\text{RB}} \\ \bar{n}_{\text{cs}}^{(\tilde{p})}(n_s, l) &= \begin{cases} \left[ n_{\text{cs}}^{\text{cell}}(n_s, l) + \left( n_{\tilde{p}}'(n_s) \cdot \Delta_{\text{shift}}^{\text{PUCCH}} + \left( \bar{n}_{\text{oc}}^{(\tilde{p})}(n_s) \bmod \Delta_{\text{shift}}^{\text{PUCCH}} \right) \right) \bmod N' \right] \bmod N_{\text{sc}}^{\text{RB}} & \text{for normal cyclic prefix} \\ \left[ n_{\text{cs}}^{\text{cell}}(n_s, l) + \left( n_{\tilde{p}}'(n_s) \cdot \Delta_{\text{shift}}^{\text{PUCCH}} + \bar{n}_{\text{oc}}^{(\tilde{p})}(n_s) \right) \bmod N' \right] \bmod N_{\text{sc}}^{\text{RB}} & \text{for extended cyclic prefix} \end{cases} \end{aligned}$$

where  $n_{\tilde{p}}'(n_s)$ ,  $N'$ ,  $\Delta_{\text{shift}}^{\text{PUCCH}}$  and  $n_{\text{cs}}^{\text{cell}}(n_s, l)$  are defined by clause 5.4.1. The number of reference symbols per slot  $N_{\text{RS}}^{\text{PUCCH}}$  and the sequence  $\bar{w}(n)$  are given by Table 5.5.2.2.1-1 and 5.5.2.2.1-2, respectively.

For PUCCH formats 2, 2a and 2b,  $\alpha_{\tilde{p}}(n_s, l)$  is defined by clause 5.4.2. The number of reference symbols per slot  $N_{\text{RS}}^{\text{PUCCH}}$  and the sequence  $\bar{w}^{(\tilde{p})}(n)$  are given by Table 5.5.2.2.1-1 and 5.5.2.2.1-3, respectively.

For PUCCH format 3,  $\alpha_{\tilde{p}}(n_s, l)$  is given by

$$\alpha_{\tilde{p}}(n_s, l) = 2\pi \cdot n_{\text{cs}}^{(\tilde{p})}(n_s, l) / N_{\text{sc}}^{\text{RB}}$$

$$n_{\text{cs}}^{(\tilde{p})}(n_s, l) = \left( n_{\text{cs}}^{\text{cell}}(n_s, l) + n'_{\tilde{p}}(n_s) \right) \bmod N_{\text{sc}}^{\text{RB}}$$

where  $n'_{\tilde{p}}(n_s)$  is given by Table 5.5.2.2.1-4 and  $n_{\text{oc},0}^{(\tilde{p})}$  and  $n_{\text{oc},1}^{(\tilde{p})}$  for the first and second slot in a subframe, respectively, are obtained from clause 5.4.2A. The number of reference symbols per slot  $N_{\text{RS}}^{\text{PUCCH}}$  and the sequence  $\bar{w}(n)$  are given by Table 5.5.2.2.1-1 and 5.5.2.2.1-3, respectively.

**Table 5.5.2.2.1-1: Number of PUCCH demodulation reference symbols per slot  $N_{\text{RS}}^{\text{PUCCH}}$**

| PUCCH format | Normal cyclic prefix | Extended cyclic prefix |
|--------------|----------------------|------------------------|
| 1, 1a, 1b    | 3                    | 2                      |
| 2, 3         | 2                    | 1                      |
| 2a, 2b       | 2                    | N/A                    |

**Table 5.5.2.2.1-2: Orthogonal sequences  $\left[ \bar{w}^{(\tilde{p})}(0) \dots \bar{w}^{(\tilde{p})}(N_{\text{RS}}^{\text{PUCCH}} - 1) \right]$  for PUCCH formats 1, 1a and 1b**

| Sequence index $\bar{n}_{\text{oc}}^{(\tilde{p})}(n_s)$ | Normal cyclic prefix              | Extended cyclic prefix |
|---------------------------------------------------------|-----------------------------------|------------------------|
| 0                                                       | $[1 \ 1 \ 1]$                     | $[1 \ 1]$              |
| 1                                                       | $[1 \ e^{j2\pi/3} \ e^{j4\pi/3}]$ | $[1 \ -1]$             |
| 2                                                       | $[1 \ e^{j4\pi/3} \ e^{j2\pi/3}]$ | N/A                    |

**Table 5.5.2.2.1-3: Orthogonal sequences  $\left[ \bar{w}^{(\tilde{p})}(0) \dots \bar{w}^{(\tilde{p})}(N_{\text{RS}}^{\text{PUCCH}} - 1) \right]$  for PUCCH formats 2, 2a, 2b and 3.**

| Normal cyclic prefix | Extended cyclic prefix |
|----------------------|------------------------|
| $[1 \ 1]$            | $[1]$                  |

**Table 5.5.2.2.1-4: Relation between  $n_{\text{oc}}^{(\tilde{p})}$  and  $n'_{\tilde{p}}(n_s)$  for PUCCH format 3.**

| $n_{\text{oc}}^{(\tilde{p})}$ | $n'_{\tilde{p}}(n_s)$ |                       |
|-------------------------------|-----------------------|-----------------------|
|                               | $N_{\text{SF},1} = 5$ | $N_{\text{SF},1} = 4$ |
| 0                             | 0                     | 0                     |
| 1                             | 3                     | 3                     |
| 2                             | 6                     | 6                     |
| 3                             | 8                     | 9                     |
| 4                             | 10                    | N/A                   |

The PUCCH demodulation reference signal sequence  $r_{\text{PUCCH}}^{(\tilde{p})}(\cdot)$  for PUCCH formats 4 and 5 is defined by

$$r_{\text{PUCCH}}^{(\tilde{p})}(m \cdot M_{\text{sc}}^{\text{RS}} + n) = r_{u,v}^{(\alpha, \delta)}(n)$$

where

$$\begin{aligned} \tilde{p} &= 0 \\ m &= 0, 1 \\ n &= 0, \dots, M_{\text{sc}}^{\text{RS}} - 1 \end{aligned}$$

and

$$M_{sc}^{RS} = \begin{cases} M_{sc}^{PUCCH4} & \text{for PUCCH format 4} \\ N_{sc}^{RB} & \text{for PUCCH format 5} \end{cases}$$

Clause 5.5.1 defines the sequence  $r_{u,v}^{(\alpha_\lambda, \delta)}(0), \dots, r_{u,v}^{(\alpha_\lambda, \delta)}(M_{sc}^{RS} - 1)$  where  $\delta = 0$ .

The cyclic shift  $\alpha_\lambda$  in a slot  $n_s$  is given as  $\alpha_\lambda = 2\pi m_{cs,\lambda}/12$  with

$$n_{cs,\lambda} = (n_{DMRS}^{(1)} + n_{DMRS}^{(2)} + n_{PN}(n_s)) \bmod 2$$

where the values of  $n_{DMRS}^{(1)}$  and  $n_{PN}(n_s)$  are given by Clause 5.5.2.1.1 and

$$n_{DMRS}^{(2)} = \begin{cases} 0 & \text{PUCCH format 4} \\ 0 & \text{PUCCH format 5 with } n_{oc} = 0 \\ 6 & \text{PUCCH format 5 with } n_{oc} = 1 \end{cases}$$

with  $n_{oc}$  obtained as described in clause 5.4.2C.

### 5.5.2.2.2 Mapping to physical resources

The sequence  $r_{PUCCH}^{(\tilde{p})}(\cdot)$  shall be multiplied with the amplitude scaling factor  $\beta_{PUCCH}$  and mapped in sequence starting with  $r_{PUCCH}^{(\tilde{p})}(0)$  to resource elements  $(k, l)$  on antenna port  $p$ . The mapping shall be in increasing order of first  $k$ , then  $l$  and finally the slot number. The set of values for  $k$  and the relation between the index  $\tilde{p}$  and the antenna port number  $p$  shall be identical to the values used for the corresponding PUCCH transmission. The values of the symbol index  $l$  in a slot are given by Table 5.5.2.2.2-1.

**Table 5.5.2.2.2-1: Demodulation reference signal location for different PUCCH formats.**

| PUCCH format | Set of values for $l$ |                        |
|--------------|-----------------------|------------------------|
|              | Normal cyclic prefix  | Extended cyclic prefix |
| 1, 1a, 1b    | 2, 3, 4               | 2, 3                   |
| 2, 3         | 1, 5                  | 3                      |
| 2a, 2b       | 1, 5                  | N/A                    |
| 4, 5         | 3                     | 2                      |

For BL/CE UEs, if uplink resource reservation is enabled for the UE as specified in [9], then in case of PUCCH transmission with  $N_{rep}^{PUCCH} > 1$  associated with C-RNTI or SPS C-RNTI using UE-specific MPDCCH search space including PUCCH transmission without a corresponding MPDCCH,

- In a subframe that is fully reserved as defined in clause 8.0 in [4], the demodulation reference signal transmission is postponed until the next BL/CE uplink subframe that is not fully reserved.
- In a subframe that is partially reserved, the demodulation reference signal transmission in a SC-FDMA symbol that is reserved is dropped.

### 5.5.2.3 Demodulation reference signal for SPUCCH

#### 5.5.2.3.1 Reference signal sequence

The SPUCCH demodulation reference signal sequence  $r_{SPUCCH}^{(\tilde{p})}(t)$  for subslot-SPUCCH format 4, and, slot-SPUCCH formats 1, 1a, 1b, 3 and 4 is as defined for  $r_{PUCCH}^{(\tilde{p})}(\cdot)$  in clause 5.5.2.2.1 for PUCCH format 1, 1a, 1b, 2, 2a, 2b and 3,

using the parameter settings in Table 5.5.2.3.1-1, and with the number of reference symbols  $N_{RS}^{PUCCH}$  replaced by  $N_{RS}^{SPUCCH}$  and given by Table 5.5.2.3.1-2.

NOTE: Subslot-SPUCCH format 1/1a/1b does not employ a reference signal based design.

The sequence  $r_{u,v}^{(\alpha_{\tilde{p}})}(n)$  is given by clause 5.5.1 with  $\delta = 0$ , where the expression for the cyclic shift  $\alpha$  is determined depending on the SPUCCH format, see table 5.5.2.3.1-3.

**Table 5.5.2.3.1-1: Parameters for SPUCCH demodulation reference signal**

| SPUCCH format |           | Frequency hopping | $m'$ | $M_{sc}^{RS}$      | $\overline{w}^{(\tilde{p})}(m)$                | $z(m)$ |
|---------------|-----------|-------------------|------|--------------------|------------------------------------------------|--------|
| Slot          | 1, 1a, 1b | Disabled          | 0    | 12                 | See Table 5.5.2.2.1-2 for normal cyclic prefix | 1      |
|               |           | Enabled           | 0    | 12                 | 1                                              | 1      |
|               | 3         | Disabled          | 0    | 12                 | See clause 5.5.2.2.2                           | 1      |
|               | 4         | Enabled           | 0    | $M_{sc}^{SPUCCH4}$ | 1                                              | 1      |
| Subslot       | 4         | Disabled          | 0    | $M_{sc}^{SPUCCH4}$ | 1                                              | 1      |

**Table 5.5.2.3.1-2: Number of SPUCCH demodulation reference symbols  $N_{RS}^{SPUCCH}$  per slot or per subslot**

| SPUCCH format |           | Frequency hopping   | $N_{RS}^{SPUCCH}$ |
|---------------|-----------|---------------------|-------------------|
| Slot          | 1, 1a, 1b | Enabled or disabled | 3                 |
|               | 3         | Disabled            | 2                 |
|               | 4         | Enabled             | 2                 |
| Subslot       | 4         | Disabled            | 1                 |

**Table 5.5.2.3.1-3:  $\alpha$**

| SPUCCH format |           | Frequency hopping   | $\alpha$                                                                                                                                                 |
|---------------|-----------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Slot          | 1, 1a, 1b | Enabled or disabled | see $\alpha_{\tilde{p}}$ in clause 5.4A.2                                                                                                                |
|               | 3         | Disabled            | see $\alpha_{\tilde{p}}$ for PUCCH format 3 in clause 5.5.2.2.1 and determining $n_{oc,0}^{(\tilde{p})}$ and $n_{oc,1}^{(\tilde{p})}$ in clause 5.4A.3.1 |
|               | 4         | Enabled             | see $\alpha_{\lambda}$ for PUCCH format 4 in clause 5.5.2.2.1                                                                                            |
| Subslot       | 4         | Disabled            | see $\alpha_{\lambda}$ for PUCCH format 4 in clause 5.5.2.2.1                                                                                            |

### 5.5.2.3.2 Mapping to physical resources

The sequence  $r_{PSUCC\tilde{p}}^{(\tilde{p})}(l)$  shall be multiplied with the amplitude scaling factor  $\beta_{SPUCCH}$  and mapped in sequence starting with  $r_{SPUCCH}^{(\tilde{p})}(0)$  to resource elements  $(k,l)$  on antenna port  $p$ . The mapping shall be in increasing order of first  $k$ , then  $l$ . The set of values for  $k$  and the relation between the index  $\tilde{p}$  and the antenna port number  $p$  shall be identical to the values used for the corresponding SPUCCH transmission. The values of the symbol index  $l$  in a slot and a subslot are given by Table 5.5.2.3.2-1 and Table 5.5.2.3.2-2 respectively.

**Table 5.5.2.3.2-1: Demodulation reference signal location for different slot-SPUCCH formats**

| SPUCCH format | Frequency hopping | Slot                                | Set of values for $l$ |
|---------------|-------------------|-------------------------------------|-----------------------|
| 1, 1a, 1b     | Enabled           | 1 <sup>st</sup>                     | 1, 4, 5               |
|               |                   | 2 <sup>nd</sup>                     | 1, 2, 5               |
|               | Disabled          | 1 <sup>st</sup> and 2 <sup>nd</sup> | 2, 3, 4               |
| 3             | Disabled          | 1 <sup>st</sup> and 2 <sup>nd</sup> | 1, 5                  |
| 4             | Enabled           | 1 <sup>st</sup> and 2 <sup>nd</sup> | 1, 5                  |

Table 5.5.2.3.2-2: Demodulation reference signal location for different subslot-SPUCCH formats

| SPUCCH format | Subslot number in subframe | Slot            | <i>l</i> |
|---------------|----------------------------|-----------------|----------|
| 4             | 0                          | 1 <sup>st</sup> | 0        |
|               | 1                          | 1 <sup>st</sup> | 3        |
|               | 2                          | 1 <sup>st</sup> | 5        |
|               | 3                          | 2 <sup>nd</sup> | 0        |
|               | 4                          | 2 <sup>nd</sup> | 2        |
|               | 5                          | 2 <sup>nd</sup> | 4        |

### 5.5.3 Sounding reference signal

Two types of sounding reference signals can be configured:

- basic sounding reference signal, supporting periodic or aperiodic transmission
- additional sounding reference signal, supporting aperiodic transmission only

Basic SRS corresponds to either SRS trigger type 0 or type 1 in clause 8.2 of [4]. Additional SRS corresponds to SRS trigger type 2 in clause 8.2 of [4].

#### 5.5.3.1 Sequence generation

##### 5.5.3.1.1 Sequence generation for basic SRS

The sounding reference signal sequence  $r_{\text{SRS}}^{(\tilde{p})}(n) = r_{u,v}^{(\alpha_{\tilde{p}}, \delta)}(n)$  is defined by clause 5.5.1, where  $u$  is the sequence-group number defined in clause 5.5.1.3,  $v$  is the base sequence number defined in clause 5.5.1.4, and  $\delta = 0$ . The cyclic shift  $\alpha_{\tilde{p}}$  of the sounding reference signal is given as

$$\alpha_{\tilde{p}} = 2\pi \frac{n_{\text{SRS}}^{\text{cs}, \tilde{p}}}{n_{\text{SRS}}^{\text{cs}, \max}}$$

$$n_{\text{SRS}}^{\text{cs}, \tilde{p}} = \left( n_{\text{SRS}}^{\text{cs}} + \frac{n_{\text{SRS}}^{\text{cs}, \max} \tilde{p}}{N_{\text{ap}}} \right) \bmod n_{\text{SRS}}^{\text{cs}, \max},$$

$$\tilde{p} \in \{0, 1, \dots, N_{\text{ap}} - 1\}$$

where  $n_{\text{SRS}}^{\text{cs}} = \{0, 1, \dots, n_{\text{SRS}}^{\text{cs}, \max} - 1\}$  is configured separately for periodic and each configuration of aperiodic sounding by the higher-layer parameters *cyclicShift* and *cyclicShift-ap*, respectively, for each UE and  $N_{\text{ap}}$  is the number of antenna ports used for sounding reference signal transmission. The parameter  $n_{\text{SRS}}^{\text{cs}, \max} = 8$  if  $K_{\text{TC}} = 2$ , otherwise  $n_{\text{SRS}}^{\text{cs}, \max} = 12$ . The parameter  $K_{\text{TC}}$  is given by the higher layer parameter *transmissionCombNum* if configured, otherwise  $K_{\text{TC}} = 2$ .

##### 5.5.3.1.2 Sequence generation for additional SRS

The sounding reference signal  $r_{\text{SRS}}^{(\tilde{p})}(n)$  is defined by clause 5.5.3.1.1 with the following exceptions

- $n_{\text{SRS}}^{\text{cs}}$  is given by the higher-layer parameter *srs-CyclicShiftAdd*
- $N_{\text{ap}}$  is given by the higher-layer parameter *srs-AntennaPortAdd*
- $K_{\text{TC}}$  is given by the higher-layer parameter *srs-TransmissionCombNumAdd*
- the function  $f_{\text{gh}}$  in clause 5.5.1.3 is given by

$$f_{\text{gh}}(n_s, l) = \begin{cases} 0 & \text{if group hopping is disabled} \\ \left( \sum_{i=0}^7 2^i c(8(n_s N_{\text{symb}}^{\text{UL}} + l) + i) \right) \bmod 30 & \text{if group hopping is enabled} \end{cases}$$

where  $l$  is the SC-FDMA symbol index within the slot  $n_s$  and  $N_{\text{symb}}^{\text{UL}}$  is the number of SC-FDMA symbols per slot

- the function  $v$  in clause 5.5.1.4 is given by

$$v = \begin{cases} c(n_s N_{\text{symb}}^{\text{UL}} + l) & \text{if group hopping is disabled and sequence hopping is enabled} \\ 0 & \text{otherwise} \end{cases}$$

### 5.5.3.2 Mapping to physical resources

#### 5.5.3.2.1 Mapping to physical resources for basic SRS

The sequence shall be multiplied with the amplitude scaling factor  $\beta_{\text{SRS}}$  in order to conform to the transmit power  $P_{\text{SRS}}$  specified in clause 5.1.3.1 in TS 36.213 [4], and mapped in sequence starting with  $r_{\text{SRS}}^{(\tilde{p})}(0)$  to resource elements  $(k, l)$  on antenna port  $p$  according to

$$a_{K_{\text{TC}}k' + k_0^{(p)}, l}^{(p)} = \begin{cases} \frac{1}{\sqrt{N_{\text{ap}}}} \beta_{\text{SRS}} r_{\text{SRS}}^{(\tilde{p})}(k') & k' = 0, 1, \dots, M_{\text{sc}, b}^{\text{RS}} - 1 \\ 0 & \text{otherwise} \end{cases}$$

where  $N_{\text{ap}}$  is the number of antenna ports used for sounding reference signal transmission and the relation between the index  $\tilde{p}$  and the antenna port  $p$  is given by Table 5.2.1-1. The set of antenna ports used for sounding reference signal transmission is configured independently for periodic and each configuration of aperiodic sounding. The quantity  $k_0^{(p)}$  is the frequency-domain starting position of the sounding reference signal and for  $b = B_{\text{SRS}}$  and  $M_{\text{sc}, b}^{\text{RS}}$  is the length of the sounding reference signal sequence defined as

$$M_{\text{sc}, b}^{\text{RS}} = m_{\text{SRS}, b} N_{\text{sc}}^{\text{RB}} / K_{\text{TC}}$$

where  $m_{\text{SRS}, b}$  is given by Table 5.5.3.2-1 through Table 5.5.3.2-4 for each uplink bandwidth  $N_{\text{RB}}^{\text{UL}}$ . The cell-specific parameter *srs-BandwidthConfig*,  $C_{\text{SRS}} \in \{0, 1, 2, 3, 4, 5, 6, 7\}$  and the UE-specific parameter *srs-Bandwidth*,  $B_{\text{SRS}} \in \{0, 1, 2, 3\}$  are given by higher layers. For UpPTS,  $m_{\text{SRS}, 0}$  shall be reconfigured to  $m_{\text{SRS}, 0}^{\text{max}} = \max_{c \in C_{\text{SRS}}} \{m_{\text{SRS}, 0}^c\} \leq (N_{\text{RB}}^{\text{UL}} - 6N_{\text{RA}})$  if this reconfiguration is enabled by the cell-specific parameter *srsMaxUpPts* given by higher layers, otherwise if the reconfiguration is disabled  $m_{\text{SRS}, 0}^{\text{max}} = m_{\text{SRS}, c}$  where  $c$  is a SRS BW configuration and  $C_{\text{SRS}}$  is the set of SRS BW configurations from the Tables 5.5.3.2-1 to 5.5.3.2-4 for each uplink bandwidth  $N_{\text{RB}}^{\text{UL}}$ ,  $N_{\text{RA}}$  is the number of format 4 PRACH in the addressed UpPTS and derived from Table 5.7.1-4.

The frequency-domain starting position  $k_0^{(p)}$  is defined by

$$k_0^{(p)} = \bar{k}_0^{(p)} + \sum_{b=0}^{B_{\text{SRS}}} K_{\text{TC}} M_{\text{sc}, b}^{\text{RS}} n_b$$

where for normal uplink subframes  $\bar{k}_0^{(p)}$  is defined by

$$\bar{k}_0^{(p)} = \left\lfloor N_{\text{RB}}^{\text{UL}} / 2 \right\rfloor - m_{\text{SRS}, 0} N_{\text{sc}}^{\text{RB}} + k_{\text{TC}}^{(p)}$$

and for UpPTS by

$$\bar{k}_0^{(p)} = \begin{cases} (N_{\text{RB}}^{\text{UL}} - m_{\text{SRS}, 0}^{\text{max}}) N_{\text{sc}}^{\text{RB}} + k_{\text{TC}}^{(p)} & \text{if } ((n_f \bmod 2) \cdot (2 - N_{\text{SP}}) + n_{\text{hf}}) \bmod 2 = 0 \\ k_{\text{TC}}^{(p)} & \text{otherwise} \end{cases}$$

The quantity  $k_{\text{TC}}^{(p)} \in \{0, 1, \dots, K_{\text{TC}} - 1\}$  is given by

$$k_{\text{TC}}^{(p)} = \begin{cases} 1 - \bar{k}_{\text{TC}} & \text{if } n_{\text{SRS}}^{\text{cs}} \in \{4, 5, 6, 7\} \text{ and } \tilde{p} \in \{1, 3\} \text{ and } N_{\text{ap}} = 4 \\ \bar{k}_{\text{TC}} & \text{otherwise} \end{cases}$$

where the relation between the index  $\tilde{p}$  and the antenna port  $p$  is given by Table 5.2.1-1,  $\bar{k}_{\text{TC}} \in \{0, 1, \dots, K_{\text{TC}} - 1\}$  is given by the UE-specific parameter *transmissionComb* or *transmissionComb-ap* for periodic and each configuration of aperiodic transmission, respectively, provided by higher layers for the UE, and  $n_b$  is frequency position index. The

variable  $n_{\text{hf}}$  is equal to 0 for UpPTS in the first half frame and equal to 1 for UpPTS in the second half frame of a radio frame.

The frequency hopping of the sounding reference signal is configured by the parameter  $b_{\text{hop}} \in \{0,1,2,3\}$ , provided by higher-layer parameter *srs-HoppingBandwidth*. Frequency hopping is not supported for aperiodic transmission, except for additional SRS. If frequency hopping of the sounding reference signal is not enabled (i.e.,  $b_{\text{hop}} \geq B_{\text{SRS}}$ ), the frequency position index  $n_b$  remains constant (unless re-configured) and is defined by  $n_b = \lfloor 4n_{\text{RRC}}/m_{\text{SRS},b} \rfloor \bmod N_b$  where the parameter  $n_{\text{RRC}}$  is given by higher-layer parameters *freqDomainPosition* and *freqDomainPosition-ap* for periodic and each configuration of aperiodic transmission, respectively. If frequency hopping of the sounding reference signal is enabled (i.e.,  $b_{\text{hop}} < B_{\text{SRS}}$ ), the frequency position indexes  $n_b$  are defined by

$$n_b = \begin{cases} \lfloor 4n_{\text{RRC}}/m_{\text{SRS},b} \rfloor \bmod N_b & b \leq b_{\text{hop}} \\ \{F_b(n_{\text{SRS}}) + \lfloor 4n_{\text{RRC}}/m_{\text{SRS},b} \rfloor\} \bmod N_b & \text{otherwise} \end{cases}$$

where  $N_b$  is given by Table 5.5.3.2-1 through Table 5.5.3.2-4 for each uplink bandwidth  $N_{\text{RB}}^{\text{UL}}$ ,

$$F_b(n_{\text{SRS}}) = \begin{cases} (N_b/2) \left\lfloor \frac{n_{\text{SRS}} \bmod \Pi_{b'=b_{\text{hop}}}^b N_{b'}}{\Pi_{b'=b_{\text{hop}}}^{b-1} N_{b'}} \right\rfloor + \left\lfloor \frac{n_{\text{SRS}} \bmod \Pi_{b'=b_{\text{hop}}}^b N_{b'}}{2\Pi_{b'=b_{\text{hop}}}^{b-1} N_{b'}} \right\rfloor & \text{if } N_b \text{ even} \\ \lfloor N_b/2 \rfloor \lfloor n_{\text{SRS}} / \Pi_{b'=b_{\text{hop}}}^{b-1} N_{b'} \rfloor & \text{if } N_b \text{ odd} \end{cases}$$

where  $N_{b_{\text{hop}}} = 1$  regardless of the  $N_b$  value on Table 5.5.3.2-1 through Table 5.5.3.2-4, and

$$n_{\text{SRS}} = \begin{cases} 2N_{\text{SP}}n_f + 2(N_{\text{SP}} - 1) \left\lfloor \frac{n_s}{10} \right\rfloor + \left\lfloor \frac{T_{\text{offset}}}{T_{\text{offset\_max}}} \right\rfloor, & \text{for 2 ms SRS periodicity of frame structure type 2} \\ \lfloor (n_f \times 10 + \lfloor n_s/2 \rfloor) / T_{\text{SRS}} \rfloor, & \text{otherwise} \end{cases}$$

counts the number of UE-specific SRS transmissions, where  $T_{\text{SRS}}$  is UE-specific periodicity of SRS transmission defined in clause 8.2 of TS 36.213 [4],  $T_{\text{offset}}$  is SRS subframe offset defined in Table 8.2-2 of TS 36.213 [4] and  $T_{\text{offset\_max}}$  is the maximum value of  $T_{\text{offset}}$  for a certain configuration of SRS subframe offset.

The sounding reference signal shall be transmitted in the last symbol of the uplink subframe.

**Table 5.5.3.2-1:  $m_{\text{SRS},b}$  and  $N_b$ ,  $b = 0,1,2,3$ , values for the uplink bandwidth of  $6 \leq N_{\text{RB}}^{\text{UL}} \leq 40$**

| SRS bandwidth configuration<br>$C_{\text{SRS}}$ | SRS-Bandwidth<br>$B_{\text{SRS}} = 0$ |       | SRS-Bandwidth<br>$B_{\text{SRS}} = 1$ |       | SRS-Bandwidth<br>$B_{\text{SRS}} = 2$ |       | SRS-Bandwidth<br>$B_{\text{SRS}} = 3$ |       |
|-------------------------------------------------|---------------------------------------|-------|---------------------------------------|-------|---------------------------------------|-------|---------------------------------------|-------|
|                                                 | $m_{\text{SRS},0}$                    | $N_0$ | $m_{\text{SRS},1}$                    | $N_1$ | $m_{\text{SRS},2}$                    | $N_2$ | $m_{\text{SRS},3}$                    | $N_3$ |
| 0                                               | 36                                    | 1     | 12                                    | 3     | 4                                     | 3     | 4                                     | 1     |
| 1                                               | 32                                    | 1     | 16                                    | 2     | 8                                     | 2     | 4                                     | 2     |
| 2                                               | 24                                    | 1     | 4                                     | 6     | 4                                     | 1     | 4                                     | 1     |
| 3                                               | 20                                    | 1     | 4                                     | 5     | 4                                     | 1     | 4                                     | 1     |
| 4                                               | 16                                    | 1     | 4                                     | 4     | 4                                     | 1     | 4                                     | 1     |
| 5                                               | 12                                    | 1     | 4                                     | 3     | 4                                     | 1     | 4                                     | 1     |
| 6                                               | 8                                     | 1     | 4                                     | 2     | 4                                     | 1     | 4                                     | 1     |
| 7                                               | 4                                     | 1     | 4                                     | 1     | 4                                     | 1     | 4                                     | 1     |

**Table 5.5.3.2-2:  $m_{\text{SRS},b}$  and  $N_b$ ,  $b = 0,1,2,3$ , values for the uplink bandwidth of  $40 < N_{\text{RB}}^{\text{UL}} \leq 60$**

| SRS bandwidth configuration<br>$C_{\text{SRS}}$ | SRS-Bandwidth<br>$B_{\text{SRS}} = 0$ |       | SRS-Bandwidth<br>$B_{\text{SRS}} = 1$ |       | SRS-Bandwidth<br>$B_{\text{SRS}} = 2$ |       | SRS-Bandwidth<br>$B_{\text{SRS}} = 3$ |       |
|-------------------------------------------------|---------------------------------------|-------|---------------------------------------|-------|---------------------------------------|-------|---------------------------------------|-------|
|                                                 | $m_{\text{SRS},0}$                    | $N_0$ | $m_{\text{SRS},1}$                    | $N_1$ | $m_{\text{SRS},2}$                    | $N_2$ | $m_{\text{SRS},3}$                    | $N_3$ |
| 0                                               | 48                                    | 1     | 24                                    | 2     | 12                                    | 2     | 4                                     | 3     |
| 1                                               | 48                                    | 1     | 16                                    | 3     | 8                                     | 2     | 4                                     | 2     |
| 2                                               | 40                                    | 1     | 20                                    | 2     | 4                                     | 5     | 4                                     | 1     |
| 3                                               | 36                                    | 1     | 12                                    | 3     | 4                                     | 3     | 4                                     | 1     |

|   |    |   |    |   |   |   |   |   |
|---|----|---|----|---|---|---|---|---|
| 4 | 32 | 1 | 16 | 2 | 8 | 2 | 4 | 2 |
| 5 | 24 | 1 | 4  | 6 | 4 | 1 | 4 | 1 |
| 6 | 20 | 1 | 4  | 5 | 4 | 1 | 4 | 1 |
| 7 | 16 | 1 | 4  | 4 | 4 | 1 | 4 | 1 |

**Table 5.5.3.2-3:**  $m_{\text{SRS},b}$  and  $N_b$ ,  $b=0,1,2,3$ , values for the uplink bandwidth of  $60 < N_{\text{RB}}^{\text{UL}} \leq 80$ 

| SRS bandwidth configuration<br>$C_{\text{SRS}}$ | SRS-Bandwidth<br>$B_{\text{SRS}} = 0$ |       | SRS-Bandwidth<br>$B_{\text{SRS}} = 1$ |       | SRS-Bandwidth<br>$B_{\text{SRS}} = 2$ |       | SRS-Bandwidth<br>$B_{\text{SRS}} = 3$ |       |
|-------------------------------------------------|---------------------------------------|-------|---------------------------------------|-------|---------------------------------------|-------|---------------------------------------|-------|
|                                                 | $m_{\text{SRS},0}$                    | $N_0$ | $m_{\text{SRS},1}$                    | $N_1$ | $m_{\text{SRS},2}$                    | $N_2$ | $m_{\text{SRS},3}$                    | $N_3$ |
| 0                                               | 72                                    | 1     | 24                                    | 3     | 12                                    | 2     | 4                                     | 3     |
| 1                                               | 64                                    | 1     | 32                                    | 2     | 16                                    | 2     | 4                                     | 4     |
| 2                                               | 60                                    | 1     | 20                                    | 3     | 4                                     | 5     | 4                                     | 1     |
| 3                                               | 48                                    | 1     | 24                                    | 2     | 12                                    | 2     | 4                                     | 3     |
| 4                                               | 48                                    | 1     | 16                                    | 3     | 8                                     | 2     | 4                                     | 2     |
| 5                                               | 40                                    | 1     | 20                                    | 2     | 4                                     | 5     | 4                                     | 1     |
| 6                                               | 36                                    | 1     | 12                                    | 3     | 4                                     | 3     | 4                                     | 1     |
| 7                                               | 32                                    | 1     | 16                                    | 2     | 8                                     | 2     | 4                                     | 2     |

**Table 5.5.3.2-4:**  $m_{\text{SRS},b}$  and  $N_b$ ,  $b=0,1,2,3$ , values for the uplink bandwidth of  $80 < N_{\text{RB}}^{\text{UL}} \leq 110$ 

| SRS bandwidth configuration<br>$C_{\text{SRS}}$ | SRS-Bandwidth<br>$B_{\text{SRS}} = 0$ |       | SRS-Bandwidth<br>$B_{\text{SRS}} = 1$ |       | SRS-Bandwidth<br>$B_{\text{SRS}} = 2$ |       | SRS-Bandwidth<br>$B_{\text{SRS}} = 3$ |       |
|-------------------------------------------------|---------------------------------------|-------|---------------------------------------|-------|---------------------------------------|-------|---------------------------------------|-------|
|                                                 | $m_{\text{SRS},0}$                    | $N_0$ | $m_{\text{SRS},1}$                    | $N_1$ | $m_{\text{SRS},2}$                    | $N_2$ | $m_{\text{SRS},3}$                    | $N_3$ |
| 0                                               | 96                                    | 1     | 48                                    | 2     | 24                                    | 2     | 4                                     | 6     |
| 1                                               | 96                                    | 1     | 32                                    | 3     | 16                                    | 2     | 4                                     | 4     |
| 2                                               | 80                                    | 1     | 40                                    | 2     | 20                                    | 2     | 4                                     | 5     |
| 3                                               | 72                                    | 1     | 24                                    | 3     | 12                                    | 2     | 4                                     | 3     |
| 4                                               | 64                                    | 1     | 32                                    | 2     | 16                                    | 2     | 4                                     | 4     |
| 5                                               | 60                                    | 1     | 20                                    | 3     | 4                                     | 5     | 4                                     | 1     |
| 6                                               | 48                                    | 1     | 24                                    | 2     | 12                                    | 2     | 4                                     | 3     |
| 7                                               | 48                                    | 1     | 16                                    | 3     | 8                                     | 2     | 4                                     | 2     |

### 5.5.3.2.2 Mapping to physical resources for additional SRS

An additional SRS spans one or more SC-FDMA symbols in the time domain, where

- the starting SC-FDMA symbol  $l_0$  within the subframe is given by the higher-layer parameter *srs-StartPosAdd*;
- the duration  $N$  in number of SC-FDMA symbols, including potential guard symbols, is given by the higher-layer parameter *srs-DurationAdd*.

Mapping to physical resources shall be done according to clause 5.5.3.2.1 with the following exceptions:

- frequency hopping between SC-FDMA symbols is supported and if a UE is configured by higher layer parameter *srs-GuardSymbolFH-Add*, a guard symbol is added between every frequency hop;
- antenna switching within a subframe is supported and if a UE is configured by higher layer parameter *srs-GuardSymbolAS-Add*, a guard symbol is added between every antenna switching;
- $n_{\text{SRS}} = \lfloor l'/R \rfloor$  where  $l'$  is the additional SRS transmission number not counting guard symbol(s) within the subframe with  $l' = 0$  corresponding to the starting SC-FDMA symbol  $l_0$ , and  $R \in \{1,2,3,4,6,7,8,9,12,13\}$  is the repetition factor given by the higher-layer parameter *srs-RepNumAdd*;
- $B_{\text{SRS}}$  is given by the higher-layer parameter *srs-BandwidthAdd*;
- $b_{\text{hop}}$  is given by the higher-layer parameter *srs-HoppingBandwidthAdd*;
- $N_{\text{FH}}$  is the number of frequency hops with the same antenna/antenna pair for additional SRS, derived from  $N = RN_{\text{FH}} + (N_{\text{FH}} - 1)G_{\text{FH}}$  if antenna switching is not configured for additional SRS, and from  $N = RN_{\text{AS}}N_{\text{FH}} +$

$(N_{AS} - 1)G_{AS} + (N_{FH} - 1)N_{AS}G_{FH} + (N_{AS} - 1)(1 - G_{AS})G_{FH}$  if antenna switching is configured for additional SRS, where  $R$  is the repetition factor given by the higher-layer parameter *srs-RepNumAdd*,  $N_{AS}$  is the number of antenna switches for additional SRS defined in 8.2 of [4],  $G_{AS} \in \{0, 1\}$  is the guard-symbol configuration for antenna switching given by the higher-layer parameter *srs-GuardSymbolAS*,  $G_{FH} \in \{0, 1\}$  is the guard symbol configuration for frequency hopping given by the higher-layer parameter *srs-GuardSymbolFH*, and  $N$  is given by the higher-layer parameter *srs-DurationAdd*;

- $n_{RRC}$  is given by the higher-layer parameter *srs-FreqDomainPosAdd*;
- $N_{ap}$  is given by the higher-layer parameter *srs-AntennaPortAdd*;
- $n_{SRS}^{cs}$  is given by the higher-layer parameter *srs-CyclicShiftAdd*;
- $K_{TC}$  is given by the higher-layer parameter *srs-TransmissionCombNumAdd*;
- $\bar{k}_{TC}$  is given by the higher-layer parameter *srs-TransmissionCombAdd*.

### 5.5.3.3 Sounding reference signal subframe configuration

The cell-specific subframe configuration period  $T_{SFC}$  and the cell-specific subframe offset  $\Delta_{SFC}$  for the transmission of sounding reference signals are listed in Tables 5.5.3.3-1 and 5.5.3.3-2, for frame structures type 1 and 2 respectively, where the parameter *srs-SubframeConfig* is provided by higher layers. Sounding reference signal subframes are the subframes satisfying  $\lfloor n_s / 2 \rfloor \bmod T_{SFC} \in \Delta_{SFC}$ . For frame structure type 2, a sounding reference signal is transmitted only in uplink subframes or UpPTS.

**Table 5.5.3.3-1: Frame structure type 1 sounding reference signal subframe configuration**

| srs-SubframeConfig | Binary | Configuration Period<br>$T_{SFC}$ (subframes) | Transmission offset<br>$\Delta_{SFC}$ (subframes) |
|--------------------|--------|-----------------------------------------------|---------------------------------------------------|
| 0                  | 0000   | 1                                             | {0}                                               |
| 1                  | 0001   | 2                                             | {0}                                               |
| 2                  | 0010   | 2                                             | {1}                                               |
| 3                  | 0011   | 5                                             | {0}                                               |
| 4                  | 0100   | 5                                             | {1}                                               |
| 5                  | 0101   | 5                                             | {2}                                               |
| 6                  | 0110   | 5                                             | {3}                                               |
| 7                  | 0111   | 5                                             | {0,1}                                             |
| 8                  | 1000   | 5                                             | {2,3}                                             |
| 9                  | 1001   | 10                                            | {0}                                               |
| 10                 | 1010   | 10                                            | {1}                                               |
| 11                 | 1011   | 10                                            | {2}                                               |
| 12                 | 1100   | 10                                            | {3}                                               |
| 13                 | 1101   | 10                                            | {0,1,2,3,4,6,8}                                   |
| 14                 | 1110   | 10                                            | {0,1,2,3,4,5,6,8}                                 |
| 15                 | 1111   | reserved                                      | reserved                                          |

**Table 5.5.3.3-2: Frame structure type 2 sounding reference signal subframe configuration**

| srs-SubframeConfig | Binary | Configuration Period<br>$T_{SFC}$ (subframes) | Transmission offset<br>$\Delta_{SFC}$ (subframes) |
|--------------------|--------|-----------------------------------------------|---------------------------------------------------|
| 0                  | 0000   | 5                                             | {1}                                               |
| 1                  | 0001   | 5                                             | {1, 2}                                            |
| 2                  | 0010   | 5                                             | {1, 3}                                            |
| 3                  | 0011   | 5                                             | {1, 4}                                            |
| 4                  | 0100   | 5                                             | {1, 2, 3}                                         |
| 5                  | 0101   | 5                                             | {1, 2, 4}                                         |
| 6                  | 0110   | 5                                             | {1, 3, 4}                                         |
| 7                  | 0111   | 5                                             | {1, 2, 3, 4}                                      |
| 8                  | 1000   | 10                                            | {1, 2, 6}                                         |
| 9                  | 1001   | 10                                            | {1, 3, 6}                                         |
| 10                 | 1010   | 10                                            | {1, 6, 7}                                         |
| 11                 | 1011   | 10                                            | {1, 2, 6, 8}                                      |

|    |      |          |              |
|----|------|----------|--------------|
| 12 | 1100 | 10       | {1, 3, 6, 9} |
| 13 | 1101 | 10       | {1, 4, 6, 7} |
| 14 | 1110 | reserved | reserved     |
| 15 | 1111 | reserved | reserved     |

## 5.6 SC-FDMA baseband signal generation

This clause applies to all uplink physical signals and uplink physical channels except the physical random access channel and PUSCH using sub-PRB allocations for BL/CE UEs.

The time-continuous signal  $s_l^{(p)}(t)$  for antenna port  $p$  in SC-FDMA symbol  $l$  in an uplink slot is defined by

$$s_l^{(p)}(t) = \sum_{k=-\lfloor N_{RB}^{UL} N_{sc}^{RB} / 2 \rfloor}^{\lfloor N_{RB}^{UL} N_{sc}^{RB} / 2 \rfloor - 1} a_{k^{(-)},l}^{(p)} \cdot e^{j2\pi(k+1/2)\Delta f(t - N_{CP,l}T_s)}$$

for  $0 \leq t < (N_{CP,l} + N) \times T_s$  where  $k^{(-)} = k + \lfloor N_{RB}^{UL} N_{sc}^{RB} / 2 \rfloor$ ,  $N = 2048$ ,  $\Delta f = 15$  kHz and  $a_{k,l}^{(p)}$  is the content of resource element  $(k, l)$  on antenna port  $p$ .

For frame structure type 3, if the associated DCI indicates PUSCH starting position other than '00' or if 'autonomous PUSCH' is configured,  $s_l^{(p)}(t), l=0$  is given by

$$s_0^{(p)}(t) = \begin{cases} 0 & 0 \leq t < N_{start}^{FS3} T_s \\ -s_1^{(p)}(t - N_{CP,0} T_s) & N_{start}^{FS3} T_s \leq t < (N_{CP,0} + N) T_s \end{cases}$$

where

$$N_{start}^{FS3} = \begin{cases} 768 & \text{if the associated DCI indicates PUSCH starting position '01'} \\ 768 + N_{TA} & \text{if the associated DCI indicates PUSCH starting position '10'} \\ N_{CP,0} + N & \text{if the associated DCI indicates PUSCH starting position '11'} \end{cases}$$

and where  $N_{start}^{FS3}$  is given by TS36.213 [4] if 'autonomous PUSCH' is configured.

The quantity  $N_{TA}$  is given by clause 8.1. The UE behaviour if  $N_{start}^{FS3} > N_{CP,0} + N$  is undefined.

The SC-FDMA symbols in a slot shall be transmitted in increasing order of  $l$ , starting with  $l = 0$ , where SC-FDMA symbol  $l > 0$  starts at time  $\sum_{l'=0}^{l-1} (N_{CP,l'} + N) T_s$  within the slot.

Table 5.6-1 lists the values of  $N_{CP,l}$  that shall be used.

**Table 5.6-1: SC-FDMA parameters**

| Configuration          | Cyclic prefix length $N_{CP,l}$ |
|------------------------|---------------------------------|
| Normal cyclic prefix   | 160 for $l = 0$                 |
|                        | 144 for $l = 1, 2, \dots, 6$    |
| Extended cyclic prefix | 512 for $l = 0, 1, \dots, 5$    |

## 5.6A SC-FDMA baseband signal generation for PUSCH using sub-PRB allocations

### 5.6A.1 Modulation schemes other than $\pi/2$ -BPSK

For  $M_{sc}^{RU} > 1$ , the time-continuous signal  $s_l^{(p)}(t)$  for antenna port  $p$  in SC-FDMA symbol  $l$  in an uplink slot is defined by clause 5.6 with  $N_{RB}^{UL}N_{sc}^{RB}$  replaced by  $M_{sc}^{UL}$ .

### 5.6A.2 Modulation scheme $\pi/2$ -BPSK

For  $M_{sc}^{RU} = 3$  and  $\pi/2$ -BPSK modulation only 2-of-3 adjacent subcarriers are selected as described in 5.5.2.1A.2. The time-continuous signal  $s_{k,l}(t)$  in SC-FDMA symbol  $l$  in an uplink slot is defined by

$$\begin{aligned} s_{k,l}(t) &= s_{sc1}(t) + s_{sc2}(t) \\ s_{sc1}(t) &= a_{k^{(-)},l} e^{j\phi_{k,l}} e^{j2\pi(k+1/2)\Delta f(t - N_{CP,l}T_s)} \\ s_{sc2}(t) &= a_{k^{(-)+1,l} } e^{j\phi_{k,l}} e^{j2\pi(k+3/2)\Delta f(t - N_{CP,l}T_s)} \\ k^{(-)} &= k + \left\lfloor M_{sc}^{UL} / 2 \right\rfloor \end{aligned}$$

for  $0 \leq t < (N_{CP,l} + N)T_s$  where  $N = 2048$ ,  $\Delta f = 15$  kHz,  $N_{CP,l}$  is given by Table 5.6-1, and  $a_{k^{(-)},l}$  and  $a_{k^{(-)+1,l}}$  are respectively the modulation value for subcarrier index  $k^{(-)}$  and  $k^{(-)} + 1$  for symbol  $l$ , and the values of  $k$  used on  $s_{sc1}(t)$  and  $s_{sc2}(t)$  are respectively obtained by subtracting  $\left\lfloor M_{sc}^{UL} / 2 \right\rfloor$  from the resulting set of allocated subcarriers as described in Table 8.1.6-1 of [4], and  $k^{(-)}$  represents the lower subcarrier index among the selected subcarriers and  $k^{(-)} + 1$  is the subcarrier index adjacent to it. The phase rotation  $\phi$  is given by

$$\begin{aligned} \phi &= \frac{\pi}{2}(\tilde{l} \bmod 2) + \varphi_{avg_k}(\tilde{l}) \\ \varphi_{avg_k}(\tilde{l}) &= \varphi_{avg_k}(\tilde{l} - 1) + 2\pi\Delta f(k + 1)(N + N_{CP,l})T_s \text{ when } \tilde{l} > 0 \\ \varphi_{avg_k}(0) &= 0 \\ \tilde{l} &= 0, 1, \dots, N_{TB}N_{rep}^{PUSCH}M_{RU}M_{slots}^{UL}M_{symb}^{UL} - 1 \\ l &= \tilde{l} \bmod M_{symb}^{UL} \end{aligned}$$


where  $N_{TB}$  is the number of transport blocks defined in clause 8.0 of TS 36.213 [4]. If  $N_{TB} > 1$  and interleaving between codewords is applied according to clause 8.0 of TS 36.213 [4], then the symbol counter  $\tilde{l}$  is reset at the start of the first PUSCH codeword transmission and incremented for each symbol during the transmission of the  $N_{TB}$  PUSCH codewords. For other cases, the symbol counter  $\tilde{l}$  is reset at the start of each PUSCH codeword transmission and incremented for each symbol during the transmission of the PUSCH codeword.

The SC-FDMA symbols in a slot shall be transmitted in increasing order of  $l$ , starting with  $l = 0$ , where SC-FDMA symbol  $l > 0$  starts at time  $\sum_{l'=0}^{l-1} (N_{CP,l'} + N)T_s$  within the slot.

## 5.7 Physical random access channel

### 5.7.1 Time and frequency structure

The physical layer random access preamble, illustrated in Figure 5.7.1-1, consists of a cyclic prefix of length  $T_{CP}$  and a sequence part of length  $T_{SEQ}$ . The parameter values are listed in Table 5.7.1-1 and depend on the frame structure and the random access configuration. Higher layers control the preamble format.



**Figure 5.7.1-1: Random access preamble format**

**Table 5.7.1-1: Random access preamble parameters**

| Preamble format                                                                                                                                                                                                       | $T_{CP}$          | $T_{SEQ}$                 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------------------|
| 0                                                                                                                                                                                                                     | $3168 \cdot T_s$  | $24576 \cdot T_s$         |
| 1                                                                                                                                                                                                                     | $21024 \cdot T_s$ | $24576 \cdot T_s$         |
| 2                                                                                                                                                                                                                     | $6240 \cdot T_s$  | $2 \cdot 24576 \cdot T_s$ |
| 3                                                                                                                                                                                                                     | $21024 \cdot T_s$ | $2 \cdot 24576 \cdot T_s$ |
| 4 (see Note)                                                                                                                                                                                                          | $448 \cdot T_s$   | $4096 \cdot T_s$          |
| NOTE: Frame structure type 2 and special subframe configurations with UpPTS lengths $4384 \cdot T_s$ and $5120 \cdot T_s$ only assuming that the number of additional SC-FDMA symbols in UpPTS X in Table 4.2-1 is 0. |                   |                           |

The transmission of a random access preamble, if triggered by the MAC layer, is restricted to certain time and frequency resources. These resources are enumerated in increasing order of the subframe number within the radio frame and the physical resource blocks in the frequency domain such that index 0 correspond to the lowest numbered physical resource block and subframe within the radio frame. PRACH resources within the radio frame are indicated by a PRACH configuration index, where the indexing is in the order of appearance in Table 5.7.1-2 and Table 5.7.1-4.

For non-BL/CE UEs there are up to two PRACH configurations in a cell. The first PRACH configuration is configured by higher layers with a PRACH configuration index (*prach-ConfigurationIndex*) and a PRACH frequency offset  $n_{PRB\ offset}^{RA}$  (*prach-FrequencyOffset*). The second PRACH configuration (if any) is configured by higher layers with a PRACH configuration index (*prach-ConfigurationIndexHighSpeed*) and a PRACH frequency offset  $n_{PRB\ offset}^{RA}$  (*prach-FrequencyOffsetHighSpeed*).

For BL/CE UEs, for each PRACH coverage enhancement level, there is a PRACH configuration configured by higher layers with a PRACH configuration index (*prach-ConfigurationIndex*), a PRACH frequency offset  $\bar{n}_{PRB\ offset}^{RA}$  (*prach-FrequencyOffset*), a number of PRACH repetitions per attempt  $N_{rep}^{PRACH}$  (*numRepetitionPerPreambleAttempt*) and optionally a PRACH starting subframe periodicity  $N_{start}^{PRACH}$  (*prach-StartingSubframe*). PRACH of preamble format 0-3 is transmitted  $N_{rep}^{PRACH} \geq 1$  times, whereas PRACH of preamble format 4 is transmitted one time only.

For BL/CE UEs and for each PRACH coverage enhancement level, if frequency hopping is enabled for a PRACH configuration by the higher-layer parameter *prach-HoppingConfig*, the value of the parameter  $n_{PRB\ offset}^{RA}$  depends on the SFN and the PRACH configuration index and is given by

- In case the PRACH configuration index is such that a PRACH resource occurs in every radio frame when calculated as below from Table 5.7.1-2 or Table 5.7.1-4,

$$n_{PRB\ offset}^{RA} = \begin{cases} \bar{n}_{PRB\ offset}^{RA} & \text{if } n_f \bmod 2 = 0 \\ \left( \bar{n}_{PRB\ offset}^{RA} + f_{PRB, hop}^{PRACH} \right) \bmod N_{RB}^{UL} & \text{if } n_f \bmod 2 = 1 \end{cases}$$

- otherwise

$$n_{\text{PRB offset}}^{\text{RA}} = \begin{cases} \bar{n}_{\text{PRB offset}}^{\text{RA}} & \text{if } \left\lfloor \frac{n_f \bmod 4}{2} \right\rfloor = 0 \\ \left( \bar{n}_{\text{PRB offset}}^{\text{RA}} + f_{\text{PRB, hop}}^{\text{PRACH}} \right) \bmod N_{\text{RB}}^{\text{UL}} & \text{if } \left\lfloor \frac{n_f \bmod 4}{2} \right\rfloor = 1 \end{cases}$$

where  $n_f$  is the system frame number corresponding to the first subframe for each PRACH repetition,  $f_{\text{PRB, hop}}^{\text{PRACH}}$  corresponds to a cell-specific higher-layer parameter *prach-HoppingOffset*. If frequency hopping is not enabled for the PRACH configuration then  $n_{\text{PRB offset}}^{\text{RA}} = \bar{n}_{\text{PRB offset}}^{\text{RA}}$ .

For frame structure type 1 with preamble format 0-3, for each of the PRACH configurations there is at most one random access resource per subframe.

Table 5.7.1-2 lists the preamble formats according to Table 5.7.1-1 and the subframes in which random access preamble transmission is allowed for a given configuration in frame structure type 1. The start of the random access preamble shall be aligned with the start of the corresponding uplink subframe at the UE assuming  $N_{\text{TA}} = 0$ , where  $N_{\text{TA}}$  is defined in clause 8.1. For PRACH configurations 0, 1, 2, 15, 16, 17, 18, 31, 32, 33, 34, 47, 48, 49, 50 and 63 the UE may for handover purposes assume an absolute value of the relative time difference between radio frame  $i$  in the current cell and the target cell of less than  $153600 \cdot T_s$ .

The first physical resource block  $n_{\text{PRB}}^{\text{RA}}$  allocated to the PRACH opportunity considered for preamble formats 0, 1, 2 and 3 is defined as  $n_{\text{PRB}}^{\text{RA}} = n_{\text{PRB offset}}^{\text{RA}}$ .

**Table 5.7.1-2: Frame structure type 1 random access configuration for preamble formats 0-3**

| PRACH Configuration Index | Preamble Format | System frame number | Subframe number              | PRACH Configuration Index | Preamble Format | System frame number | Subframe number |
|---------------------------|-----------------|---------------------|------------------------------|---------------------------|-----------------|---------------------|-----------------|
| 0                         | 0               | Even                | 1                            | 32                        | 2               | Even                | 1               |
| 1                         | 0               | Even                | 4                            | 33                        | 2               | Even                | 4               |
| 2                         | 0               | Even                | 7                            | 34                        | 2               | Even                | 7               |
| 3                         | 0               | Any                 | 1                            | 35                        | 2               | Any                 | 1               |
| 4                         | 0               | Any                 | 4                            | 36                        | 2               | Any                 | 4               |
| 5                         | 0               | Any                 | 7                            | 37                        | 2               | Any                 | 7               |
| 6                         | 0               | Any                 | 1, 6                         | 38                        | 2               | Any                 | 1, 6            |
| 7                         | 0               | Any                 | 2, 7                         | 39                        | 2               | Any                 | 2, 7            |
| 8                         | 0               | Any                 | 3, 8                         | 40                        | 2               | Any                 | 3, 8            |
| 9                         | 0               | Any                 | 1, 4, 7                      | 41                        | 2               | Any                 | 1, 4, 7         |
| 10                        | 0               | Any                 | 2, 5, 8                      | 42                        | 2               | Any                 | 2, 5, 8         |
| 11                        | 0               | Any                 | 3, 6, 9                      | 43                        | 2               | Any                 | 3, 6, 9         |
| 12                        | 0               | Any                 | 0, 2, 4, 6, 8                | 44                        | 2               | Any                 | 0, 2, 4, 6, 8   |
| 13                        | 0               | Any                 | 1, 3, 5, 7, 9                | 45                        | 2               | Any                 | 1, 3, 5, 7, 9   |
| 14                        | 0               | Any                 | 0, 1, 2, 3, 4, 5, 6, 7, 8, 9 | 46                        | N/A             | N/A                 | N/A             |
| 15                        | 0               | Even                | 9                            | 47                        | 2               | Even                | 9               |
| 16                        | 1               | Even                | 1                            | 48                        | 3               | Even                | 1               |
| 17                        | 1               | Even                | 4                            | 49                        | 3               | Even                | 4               |
| 18                        | 1               | Even                | 7                            | 50                        | 3               | Even                | 7               |
| 19                        | 1               | Any                 | 1                            | 51                        | 3               | Any                 | 1               |
| 20                        | 1               | Any                 | 4                            | 52                        | 3               | Any                 | 4               |
| 21                        | 1               | Any                 | 7                            | 53                        | 3               | Any                 | 7               |
| 22                        | 1               | Any                 | 1, 6                         | 54                        | 3               | Any                 | 1, 6            |
| 23                        | 1               | Any                 | 2, 7                         | 55                        | 3               | Any                 | 2, 7            |
| 24                        | 1               | Any                 | 3, 8                         | 56                        | 3               | Any                 | 3, 8            |
| 25                        | 1               | Any                 | 1, 4, 7                      | 57                        | 3               | Any                 | 1, 4, 7         |
| 26                        | 1               | Any                 | 2, 5, 8                      | 58                        | 3               | Any                 | 2, 5, 8         |
| 27                        | 1               | Any                 | 3, 6, 9                      | 59                        | 3               | Any                 | 3, 6, 9         |
| 28                        | 1               | Any                 | 0, 2, 4, 6, 8                | 60                        | N/A             | N/A                 | N/A             |
| 29                        | 1               | Any                 | 1, 3, 5, 7, 9                | 61                        | N/A             | N/A                 | N/A             |
| 30                        | N/A             | N/A                 | N/A                          | 62                        | N/A             | N/A                 | N/A             |
| 31                        | 1               | Even                | 9                            | 63                        | 3               | Even                | 9               |

For frame structure type 2 with preamble formats 0-4, for each of the PRACH configurations there might be multiple random access resources in an UL subframe (or UpPTS for preamble format 4) depending on the UL/DL configuration [see table 4.2-2]. Table 5.7.1-3 lists PRACH configurations allowed for frame structure type 2 where the configuration index corresponds to a certain combination of preamble format, PRACH density value,  $D_{RA}$  and version index,  $r_{RA}$ . For frame structure type 2 with PRACH configuration indices 0, 1, 2, 20, 21, 22, 30, 31, 32, 40, 41, 42, 48, 49, 50, or with PRACH configuration indices 51, 53, 54, 55, 56, 57 in UL/DL configuration 3, 4, 5, the UE may for handover purposes assume an absolute value of the relative time difference between radio frame  $i$  in the current cell and the target cell is less than  $153600 \cdot T_s$ .

**Table 5.7.1-3: Frame structure type 2 random access configurations for preamble formats 0-4**

| PRACH configuration Index | Preamble Format | Density Per 10 ms $D_{RA}$ | Version $r_{RA}$ | PRACH configuration Index | Preamble Format | Density Per 10 ms $D_{RA}$ | Version $r_{RA}$ |
|---------------------------|-----------------|----------------------------|------------------|---------------------------|-----------------|----------------------------|------------------|
| 0                         | 0               | 0.5                        | 0                | 32                        | 2               | 0.5                        | 2                |
| 1                         | 0               | 0.5                        | 1                | 33                        | 2               | 1                          | 0                |
| 2                         | 0               | 0.5                        | 2                | 34                        | 2               | 1                          | 1                |
| 3                         | 0               | 1                          | 0                | 35                        | 2               | 2                          | 0                |
| 4                         | 0               | 1                          | 1                | 36                        | 2               | 3                          | 0                |
| 5                         | 0               | 1                          | 2                | 37                        | 2               | 4                          | 0                |
| 6                         | 0               | 2                          | 0                | 38                        | 2               | 5                          | 0                |
| 7                         | 0               | 2                          | 1                | 39                        | 2               | 6                          | 0                |
| 8                         | 0               | 2                          | 2                | 40                        | 3               | 0.5                        | 0                |
| 9                         | 0               | 3                          | 0                | 41                        | 3               | 0.5                        | 1                |
| 10                        | 0               | 3                          | 1                | 42                        | 3               | 0.5                        | 2                |
| 11                        | 0               | 3                          | 2                | 43                        | 3               | 1                          | 0                |
| 12                        | 0               | 4                          | 0                | 44                        | 3               | 1                          | 1                |
| 13                        | 0               | 4                          | 1                | 45                        | 3               | 2                          | 0                |
| 14                        | 0               | 4                          | 2                | 46                        | 3               | 3                          | 0                |
| 15                        | 0               | 5                          | 0                | 47                        | 3               | 4                          | 0                |
| 16                        | 0               | 5                          | 1                | 48                        | 4               | 0.5                        | 0                |
| 17                        | 0               | 5                          | 2                | 49                        | 4               | 0.5                        | 1                |
| 18                        | 0               | 6                          | 0                | 50                        | 4               | 0.5                        | 2                |
| 19                        | 0               | 6                          | 1                | 51                        | 4               | 1                          | 0                |
| 20                        | 1               | 0.5                        | 0                | 52                        | 4               | 1                          | 1                |
| 21                        | 1               | 0.5                        | 1                | 53                        | 4               | 2                          | 0                |
| 22                        | 1               | 0.5                        | 2                | 54                        | 4               | 3                          | 0                |
| 23                        | 1               | 1                          | 0                | 55                        | 4               | 4                          | 0                |
| 24                        | 1               | 1                          | 1                | 56                        | 4               | 5                          | 0                |
| 25                        | 1               | 2                          | 0                | 57                        | 4               | 6                          | 0                |
| 26                        | 1               | 3                          | 0                | 58                        | N/A             | N/A                        | N/A              |
| 27                        | 1               | 4                          | 0                | 59                        | N/A             | N/A                        | N/A              |
| 28                        | 1               | 5                          | 0                | 60                        | N/A             | N/A                        | N/A              |
| 29                        | 1               | 6                          | 0                | 61                        | N/A             | N/A                        | N/A              |
| 30                        | 2               | 0.5                        | 0                | 62                        | N/A             | N/A                        | N/A              |
| 31                        | 2               | 0.5                        | 1                | 63                        | N/A             | N/A                        | N/A              |

Table 5.7.1-4 lists the mapping to physical resources for the different random access opportunities needed for a certain PRACH density value,  $D_{RA}$ . Each quadruple of the format  $(f_{RA}, t_{RA}^{(0)}, t_{RA}^{(1)}, t_{RA}^{(2)})$  indicates the location of a specific random access resource, where  $f_{RA}$  is a frequency resource index within the considered time instance,  $t_{RA}^{(0)} = 0, 1, 2$  indicates whether the resource is reoccurring in all radio frames, in even radio frames, or in odd radio frames, respectively,  $t_{RA}^{(1)} = 0, 1$  indicates whether the random access resource is located in first half frame or in second half frame, respectively, and where  $t_{RA}^{(2)}$  is the uplink subframe number where the preamble starts, counting from 0 at the first uplink subframe between 2 consecutive downlink-to-uplink switch points, with the exception of preamble format 4 where  $t_{RA}^{(2)}$  is denoted as (\*). The start of the random access preamble formats 0-3 shall be aligned with the start of the corresponding uplink subframe at the UE assuming  $N_{TA} = 0$  and the random access preamble format 4 shall start  $4832 \cdot T_s$  before the end of the UpPTS at the UE, where the UpPTS is referenced to the UE's uplink frame timing assuming  $N_{TA} = 0$ .

The random access opportunities for each PRACH configuration shall be allocated in time first and then in frequency if and only if time multiplexing is not sufficient to hold all opportunities of a PRACH configuration needed for a certain density value  $D_{RA}$  without overlap in time. For preamble format 0-3, the frequency multiplexing shall be done according to

$$n_{PRB}^{RA} = \begin{cases} n_{PRB \text{ offset}}^{RA} + 6 \left\lfloor \frac{f_{RA}}{2} \right\rfloor, & \text{if } f_{RA} \bmod 2 = 0 \\ N_{RB}^{UL} - 6 - n_{PRB \text{ offset}}^{RA} - 6 \left\lfloor \frac{f_{RA}}{2} \right\rfloor, & \text{otherwise} \end{cases}$$

where  $N_{RB}^{UL}$  is the number of uplink resource blocks,  $n_{PRB}^{RA}$  is the first physical resource block allocated to the PRACH opportunity considered and where  $n_{PRB \text{ offset}}^{RA}$  is the first physical resource block available for PRACH.

For preamble format 4, the frequency multiplexing shall be done according to

$$n_{PRB}^{RA} = \begin{cases} 6 f_{RA}, & \text{if } ((n_f \bmod 2) \times (2 - N_{SP}) + t_{RA}^{(1)}) \bmod 2 = 0 \\ N_{RB}^{UL} - 6(f_{RA} + 1), & \text{otherwise} \end{cases}$$

where  $n_f$  is the system frame number and where  $N_{SP}$  is the number of DL to UL switch points within the radio frame.

For BL/CE UEs, only a subset of the subframes allowed for preamble transmission are allowed as starting subframes for the  $N_{rep}^{PRACH}$  repetitions. The allowed starting subframes for a PRACH configuration are determined as follows:

- Enumerate the subframes that are allowed for preamble transmission for the PRACH configuration as  $n_{sf}^{RA} = 0, \dots, N_{sf}^{RA} - 1$  where  $n_{sf}^{RA} = 0$  and  $n_{sf}^{RA} = N_{sf}^{RA} - 1$  correspond to the two subframes allowed for preamble transmission with the smallest and the largest absolute subframe number  $n_{sf}^{abs}$ , respectively.
- If a PRACH starting subframe periodicity  $N_{start}^{PRACH}$  is not provided by higher layers, the periodicity of the allowed starting subframes in terms of subframes allowed for preamble transmission is  $N_{rep}^{PRACH}$ . The allowed starting subframes defined over  $n_{sf}^{RA} = 0, \dots, N_{sf}^{RA} - 1$  are given by  $jN_{rep}^{PRACH}$  where  $j = 0, 1, 2, \dots$
- If a PRACH starting subframe periodicity  $N_{start}^{PRACH}$  is provided by higher layers, it indicates the periodicity of the allowed starting subframes in terms of subframes allowed for preamble transmission. The allowed starting subframes defined over  $n_{sf}^{RA} = 0, \dots, N_{sf}^{RA} - 1$  are given by  $jN_{start}^{PRACH} + N_{rep}^{PRACH}$  where  $j = 0, 1, 2, \dots$
- No starting subframe defined over  $n_{sf}^{RA} = 0, \dots, N_{sf}^{RA} - 1$  such that  $n_{sf}^{RA} > N_{sf}^{RA} - N_{rep}^{PRACH}$  is allowed.

Each random access preamble occupies a bandwidth corresponding to 6 consecutive resource blocks for both frame structures.

**Table 5.7.1-4: Frame structure type 2 random access preamble mapping in time and frequency**

| PRACH<br>configuration Index<br>(See Table 5.7.1-3) | UL/DL configuration (See Table 4.2-2)                                      |                                                                            |                                                                            |                                                                            |                                                                            |                                                                            |                                                                            |
|-----------------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------------------------------------|
|                                                     | 0                                                                          | 1                                                                          | 2                                                                          | 3                                                                          | 4                                                                          | 5                                                                          | 6                                                                          |
| 0                                                   | (0,1,0,2)                                                                  | (0,1,0,1)                                                                  | (0,1,0,0)                                                                  | (0,1,0,2)                                                                  | (0,1,0,1)                                                                  | (0,1,0,0)                                                                  | (0,1,0,2)                                                                  |
| 1                                                   | (0,2,0,2)                                                                  | (0,2,0,1)                                                                  | (0,2,0,0)                                                                  | (0,2,0,2)                                                                  | (0,2,0,1)                                                                  | (0,2,0,0)                                                                  | (0,2,0,2)                                                                  |
| 2                                                   | (0,1,1,2)                                                                  | (0,1,1,1)                                                                  | (0,1,1,0)                                                                  | (0,1,0,1)                                                                  | (0,1,0,0)                                                                  | N/A                                                                        | (0,1,1,1)                                                                  |
| 3                                                   | (0,0,0,2)                                                                  | (0,0,0,1)                                                                  | (0,0,0,0)                                                                  | (0,0,0,2)                                                                  | (0,0,0,1)                                                                  | (0,0,0,0)                                                                  | (0,0,0,2)                                                                  |
| 4                                                   | (0,0,1,2)                                                                  | (0,0,1,1)                                                                  | (0,0,1,0)                                                                  | (0,0,0,1)                                                                  | (0,0,0,0)                                                                  | N/A                                                                        | (0,0,1,1)                                                                  |
| 5                                                   | (0,0,0,1)                                                                  | (0,0,0,0)                                                                  | N/A                                                                        | (0,0,0,0)                                                                  | N/A                                                                        | N/A                                                                        | (0,0,0,1)                                                                  |
| 6                                                   | (0,0,0,2)<br>(0,0,1,2)                                                     | (0,0,0,1)<br>(0,0,1,1)                                                     | (0,0,0,0)<br>(0,0,1,0)                                                     | (0,0,0,1)<br>(0,0,0,2)                                                     | (0,0,0,0)<br>(0,0,0,1)                                                     | (0,0,0,0)<br>(1,0,0,0)                                                     | (0,0,0,2)<br>(0,0,1,1)                                                     |
| 7                                                   | (0,0,0,1)<br>(0,0,1,1)                                                     | (0,0,0,0)<br>(0,0,1,0)                                                     | N/A                                                                        | (0,0,0,0)<br>(0,0,0,2)                                                     | N/A                                                                        | N/A                                                                        | (0,0,0,1)<br>(0,0,1,0)                                                     |
| 8                                                   | (0,0,0,0)<br>(0,0,1,0)                                                     | N/A                                                                        | N/A                                                                        | (0,0,0,0)<br>(0,0,0,1)                                                     | N/A                                                                        | N/A                                                                        | (0,0,0,0)<br>(0,0,1,1)                                                     |
| 9                                                   | (0,0,0,1)<br>(0,0,0,2)<br>(0,0,1,2)                                        | (0,0,0,0)<br>(0,0,0,1)<br>(0,0,1,1)                                        | (0,0,0,0)<br>(0,0,1,0)<br>(1,0,0,0)                                        | (0,0,0,0)<br>(0,0,0,1)<br>(0,0,0,2)                                        | (0,0,0,0)<br>(0,0,0,1)<br>(1,0,0,1)                                        | (0,0,0,0)<br>(1,0,0,0)<br>(2,0,0,0)                                        | (0,0,0,1)<br>(0,0,0,2)<br>(0,0,1,1)                                        |
| 10                                                  | (0,0,0,0)<br>(0,0,1,0)<br>(0,0,1,1)                                        | (0,0,0,1)<br>(0,0,1,0)<br>(0,0,1,1)                                        | (0,0,0,0)<br>(0,0,1,0)<br>(1,0,1,0)                                        | N/A                                                                        | (0,0,0,0)<br>(0,0,0,1)<br>(1,0,0,0)                                        | N/A                                                                        | (0,0,0,0)<br>(0,0,0,2)<br>(0,0,1,0)                                        |
| 11                                                  | N/A                                                                        | (0,0,0,0)<br>(0,0,0,1)<br>(0,0,1,0)                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | (0,0,0,1)<br>(0,0,1,0)<br>(0,0,1,1)                                        |
| 12                                                  | (0,0,0,1)<br>(0,0,0,2)<br>(0,0,1,1)<br>(0,0,1,2)                           | (0,0,0,0)<br>(0,0,0,1)<br>(0,0,1,0)<br>(0,0,1,1)                           | (0,0,0,0)<br>(0,0,1,0)<br>(1,0,0,0)<br>(1,0,1,0)                           | (0,0,0,0)<br>(0,0,0,1)<br>(0,0,0,2)<br>(1,0,0,2)                           | (0,0,0,0)<br>(0,0,0,1)<br>(1,0,0,0)<br>(1,0,0,1)                           | (0,0,0,0)<br>(1,0,0,0)<br>(2,0,0,0)<br>(3,0,0,0)                           | (0,0,0,1)<br>(0,0,0,2)<br>(0,0,1,0)<br>(0,0,1,1)                           |
| 13                                                  | (0,0,0,0)<br>(0,0,0,2)<br>(0,0,1,0)<br>(0,0,1,2)                           | N/A                                                                        | N/A                                                                        | (0,0,0,0)<br>(0,0,0,1)<br>(0,0,0,2)<br>(1,0,0,1)                           | N/A                                                                        | N/A                                                                        | (0,0,0,0)<br>(0,0,0,1)<br>(0,0,0,2)<br>(0,0,1,1)                           |
| 14                                                  | (0,0,0,0)<br>(0,0,0,1)<br>(0,0,1,0)<br>(0,0,1,1)                           | N/A                                                                        | N/A                                                                        | (0,0,0,0)<br>(0,0,0,1)<br>(0,0,0,2)<br>(1,0,0,0)                           | N/A                                                                        | N/A                                                                        | (0,0,0,0)<br>(0,0,0,2)<br>(0,0,1,0)<br>(0,0,1,1)                           |
| 15                                                  | (0,0,0,0)<br>(0,0,0,1)<br>(0,0,0,2)<br>(0,0,1,1)<br>(0,0,1,2)              | (0,0,0,0)<br>(0,0,0,1)<br>(0,0,1,0)<br>(0,0,1,1)<br>(1,0,0,1)              | (0,0,0,0)<br>(0,0,1,0)<br>(1,0,0,0)<br>(1,0,1,0)<br>(2,0,0,0)              | (0,0,0,0)<br>(0,0,0,1)<br>(0,0,0,2)<br>(1,0,0,1)<br>(1,0,0,2)              | (0,0,0,0)<br>(0,0,0,1)<br>(1,0,0,0)<br>(1,0,0,1)<br>(2,0,0,1)              | (0,0,0,0)<br>(1,0,0,0)<br>(2,0,0,0)<br>(3,0,0,0)<br>(4,0,0,0)              | (0,0,0,0)<br>(0,0,0,1)<br>(0,0,0,2)<br>(0,0,1,0)<br>(0,0,1,1)              |
| 16                                                  | (0,0,0,1)<br>(0,0,0,2)<br>(0,0,1,0)<br>(0,0,1,1)<br>(0,0,1,2)              | (0,0,0,0)<br>(0,0,0,1)<br>(0,0,1,0)<br>(0,0,1,1)<br>(1,0,1,1)              | (0,0,0,0)<br>(0,0,1,0)<br>(1,0,0,0)<br>(1,0,1,0)<br>(2,0,1,0)              | (0,0,0,0)<br>(0,0,0,1)<br>(0,0,0,2)<br>(1,0,0,0)<br>(1,0,0,2)              | (0,0,0,0)<br>(0,0,0,1)<br>(1,0,0,0)<br>(1,0,0,1)<br>(2,0,0,0)              | N/A                                                                        | N/A                                                                        |
| 17                                                  | (0,0,0,0)<br>(0,0,0,1)<br>(0,0,0,2)<br>(0,0,1,0)<br>(0,0,1,2)              | (0,0,0,0)<br>(0,0,0,1)<br>(0,0,1,0)<br>(0,0,1,1)<br>(1,0,0,0)              | N/A                                                                        | (0,0,0,0)<br>(0,0,0,1)<br>(0,0,0,2)<br>(1,0,0,0)<br>(1,0,0,1)              | N/A                                                                        | N/A                                                                        | N/A                                                                        |
| 18                                                  | (0,0,0,0)<br>(0,0,0,1)<br>(0,0,0,2)<br>(0,0,1,0)<br>(0,0,1,1)<br>(0,0,1,2) | (0,0,0,0)<br>(0,0,0,1)<br>(0,0,1,0)<br>(0,0,1,1)<br>(1,0,0,1)<br>(1,0,1,1) | (0,0,0,0)<br>(0,0,1,0)<br>(1,0,0,0)<br>(1,0,1,0)<br>(2,0,0,0)<br>(2,0,1,0) | (0,0,0,0)<br>(0,0,0,1)<br>(0,0,0,2)<br>(1,0,0,0)<br>(1,0,0,1)<br>(1,0,0,2) | (0,0,0,0)<br>(0,0,0,1)<br>(1,0,0,0)<br>(1,0,0,1)<br>(2,0,0,0)<br>(2,0,0,1) | (0,0,0,0)<br>(1,0,0,0)<br>(2,0,0,0)<br>(3,0,0,0)<br>(4,0,0,0)<br>(5,0,0,0) | (0,0,0,0)<br>(0,0,0,1)<br>(0,0,0,2)<br>(0,0,1,0)<br>(0,0,1,1)<br>(1,0,0,2) |
| 19                                                  | N/A                                                                        | (0,0,0,0)<br>(0,0,0,1)<br>(0,0,1,0)<br>(0,0,1,1)<br>(1,0,0,0)<br>(1,0,1,0) | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | (0,0,0,0)<br>(0,0,0,1)<br>(0,0,0,2)<br>(0,0,1,0)<br>(0,0,1,1)<br>(1,0,1,1) |
| 20 / 30                                             | (0,1,0,1)                                                                  | (0,1,0,0)                                                                  | N/A                                                                        | (0,1,0,1)                                                                  | (0,1,0,0)                                                                  | N/A                                                                        | (0,1,0,1)                                                                  |
| 21 / 31                                             | (0,2,0,1)                                                                  | (0,2,0,0)                                                                  | N/A                                                                        | (0,2,0,1)                                                                  | (0,2,0,0)                                                                  | N/A                                                                        | (0,2,0,1)                                                                  |
| 22 / 32                                             | (0,1,1,1)                                                                  | (0,1,1,0)                                                                  | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | (0,1,1,0)                                                                  |
| 23 / 33                                             | (0,0,0,1)                                                                  | (0,0,0,0)                                                                  | N/A                                                                        | (0,0,0,1)                                                                  | (0,0,0,0)                                                                  | N/A                                                                        | (0,0,0,1)                                                                  |
| 24 / 34                                             | (0,0,1,1)                                                                  | (0,0,1,0)                                                                  | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | (0,0,1,0)                                                                  |
| 25 / 35                                             | (0,0,0,1)<br>(0,0,1,1)                                                     | (0,0,0,0)<br>(0,0,1,0)                                                     | N/A                                                                        | (0,0,0,1)<br>(1,0,0,1)                                                     | (0,0,0,0)<br>(1,0,0,0)                                                     | N/A                                                                        | (0,0,0,1)<br>(0,0,1,0)                                                     |
| 26 / 36                                             | (0,0,0,1)<br>(0,0,1,1)<br>(1,0,0,1)                                        | (0,0,0,0)<br>(0,0,1,0)<br>(1,0,0,0)                                        | N/A                                                                        | (0,0,0,1)<br>(1,0,0,1)<br>(2,0,0,1)                                        | (0,0,0,0)<br>(1,0,0,0)<br>(2,0,0,0)                                        | N/A                                                                        | (0,0,0,1)<br>(0,0,1,0)<br>(1,0,0,1)                                        |

|               |                                                                            |                                                                            |                                                                            |                                                                            |                                                                            |                                                                            |                                                                            |
|---------------|----------------------------------------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------------------------------------|
| 27 / 37       | (0,0,0,1)<br>(0,0,1,1)<br>(1,0,0,1)<br>(1,0,1,1)                           | (0,0,0,0)<br>(0,0,1,0)<br>(1,0,0,0)<br>(1,0,1,0)                           | N/A                                                                        | (0,0,0,1)<br>(1,0,0,1)<br>(2,0,0,1)<br>(3,0,0,1)                           | (0,0,0,0)<br>(1,0,0,0)<br>(2,0,0,0)<br>(3,0,0,0)                           | N/A                                                                        | (0,0,0,1)<br>(0,0,1,0)<br>(1,0,0,1)<br>(1,0,1,0)                           |
| 28 / 38       | (0,0,0,1)<br>(0,0,1,1)<br>(1,0,0,1)<br>(1,0,1,1)<br>(2,0,0,1)              | (0,0,0,0)<br>(0,0,1,0)<br>(1,0,0,0)<br>(1,0,1,0)<br>(2,0,0,0)              | N/A                                                                        | (0,0,0,1)<br>(1,0,0,1)<br>(2,0,0,1)<br>(3,0,0,1)<br>(4,0,0,1)              | (0,0,0,0)<br>(1,0,0,0)<br>(2,0,0,0)<br>(3,0,0,0)<br>(4,0,0,0)              | N/A                                                                        | (0,0,0,1)<br>(0,0,1,0)<br>(1,0,0,1)<br>(1,0,1,0)<br>(2,0,0,1)              |
| 29 / 39       | (0,0,0,1)<br>(0,0,1,1)<br>(1,0,0,1)<br>(1,0,1,1)<br>(2,0,0,1)<br>(2,0,1,1) | (0,0,0,0)<br>(0,0,1,0)<br>(1,0,0,0)<br>(1,0,1,0)<br>(2,0,0,0)<br>(2,0,1,0) | N/A                                                                        | (0,0,0,1)<br>(1,0,0,1)<br>(2,0,0,1)<br>(3,0,0,1)<br>(4,0,0,1)<br>(5,0,0,1) | (0,0,0,0)<br>(1,0,0,0)<br>(2,0,0,0)<br>(3,0,0,0)<br>(4,0,0,0)<br>(5,0,0,0) | N/A                                                                        | (0,0,0,1)<br>(0,0,1,0)<br>(1,0,0,1)<br>(1,0,1,0)<br>(2,0,0,1)<br>(2,0,1,0) |
| 40            | (0,1,0,0)                                                                  | N/A                                                                        | N/A                                                                        | (0,1,0,0)                                                                  | N/A                                                                        | N/A                                                                        | (0,1,0,0)                                                                  |
| 41            | (0,2,0,0)                                                                  | N/A                                                                        | N/A                                                                        | (0,2,0,0)                                                                  | N/A                                                                        | N/A                                                                        | (0,2,0,0)                                                                  |
| 42            | (0,1,1,0)                                                                  | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        |
| 43            | (0,0,0,0)                                                                  | N/A                                                                        | N/A                                                                        | (0,0,0,0)                                                                  | N/A                                                                        | N/A                                                                        | (0,0,0,0)                                                                  |
| 44            | (0,0,1,0)                                                                  | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        |
| 45            | (0,0,0,0)<br>(0,0,1,0)                                                     | N/A                                                                        | N/A                                                                        | (0,0,0,0)<br>(1,0,0,0)                                                     | N/A                                                                        | N/A                                                                        | (0,0,0,0)<br>(1,0,0,0)                                                     |
| 46            | (0,0,0,0)<br>(0,0,1,0)<br>(1,0,0,0)                                        | N/A                                                                        | N/A                                                                        | (0,0,0,0)<br>(1,0,0,0)<br>(2,0,0,0)                                        | N/A                                                                        | N/A                                                                        | (0,0,0,0)<br>(1,0,0,0)<br>(2,0,0,0)                                        |
| 47            | (0,0,0,0)<br>(0,0,1,0)<br>(1,0,0,0)<br>(1,0,1,0)                           | N/A                                                                        | N/A                                                                        | (0,0,0,0)<br>(1,0,0,0)<br>(2,0,0,0)<br>(3,0,0,0)                           | N/A                                                                        | N/A                                                                        | (0,0,0,0)<br>(1,0,0,0)<br>(2,0,0,0)<br>(3,0,0,0)                           |
| 48            | (0,1,0,*)                                                                  | (0,1,0,*)                                                                  | (0,1,0,*)                                                                  | (0,1,0,*)                                                                  | (0,1,0,*)                                                                  | (0,1,0,*)                                                                  | (0,1,0,*)                                                                  |
| 49            | (0,2,0,*)                                                                  | (0,2,0,*)                                                                  | (0,2,0,*)                                                                  | (0,2,0,*)                                                                  | (0,2,0,*)                                                                  | (0,2,0,*)                                                                  | (0,2,0,*)                                                                  |
| 50            | (0,1,1,*)                                                                  | (0,1,1,*)                                                                  | (0,1,1,*)                                                                  | N/A                                                                        | N/A                                                                        | N/A                                                                        | (0,1,1,*)                                                                  |
| 51            | (0,0,0,*)                                                                  | (0,0,0,*)                                                                  | (0,0,0,*)                                                                  | (0,0,0,*)                                                                  | (0,0,0,*)                                                                  | (0,0,0,*)                                                                  | (0,0,0,*)                                                                  |
| 52            | (0,0,1,*)                                                                  | (0,0,1,*)                                                                  | (0,0,1,*)                                                                  | N/A                                                                        | N/A                                                                        | N/A                                                                        | (0,0,1,*)                                                                  |
| 53            | (0,0,0,*)<br>(0,0,1,*)                                                     | (0,0,0,*)<br>(0,0,1,*)                                                     | (0,0,0,*)<br>(0,0,1,*)                                                     | (0,0,0,*)<br>(1,0,0,*)                                                     | (0,0,0,*)<br>(1,0,0,*)                                                     | (0,0,0,*)<br>(1,0,0,*)                                                     | (0,0,0,*)<br>(0,0,1,*)                                                     |
| 54            | (0,0,0,*)<br>(0,0,1,*)<br>(1,0,0,*)                                        | (0,0,0,*)<br>(0,0,1,*)<br>(1,0,0,*)                                        | (0,0,0,*)<br>(0,0,1,*)<br>(1,0,0,*)                                        | (0,0,0,*)<br>(1,0,0,*)<br>(2,0,0,*)                                        | (0,0,0,*)<br>(1,0,0,*)<br>(2,0,0,*)                                        | (0,0,0,*)<br>(1,0,0,*)<br>(2,0,0,*)                                        | (0,0,0,*)<br>(0,0,1,*)<br>(1,0,0,*)                                        |
| 55            | (0,0,0,*)<br>(0,0,1,*)<br>(1,0,0,*)<br>(1,0,1,*)                           | (0,0,0,*)<br>(0,0,1,*)<br>(1,0,0,*)<br>(1,0,1,*)                           | (0,0,0,*)<br>(0,0,1,*)<br>(1,0,0,*)<br>(1,0,1,*)                           | (0,0,0,*)<br>(1,0,0,*)<br>(2,0,0,*)<br>(3,0,0,*)                           | (0,0,0,*)<br>(1,0,0,*)<br>(2,0,0,*)<br>(3,0,0,*)                           | (0,0,0,*)<br>(1,0,0,*)<br>(2,0,0,*)<br>(3,0,0,*)                           | (0,0,0,*)<br>(0,0,1,*)<br>(1,0,0,*)<br>(1,0,1,*)                           |
| 56            | (0,0,0,*)<br>(0,0,1,*)<br>(1,0,0,*)<br>(1,0,1,*)<br>(2,0,0,*)              | (0,0,0,*)<br>(0,0,1,*)<br>(1,0,0,*)<br>(1,0,1,*)<br>(2,0,0,*)              | (0,0,0,*)<br>(0,0,1,*)<br>(1,0,0,*)<br>(1,0,1,*)<br>(2,0,0,*)              | (0,0,0,*)<br>(1,0,0,*)<br>(2,0,0,*)<br>(3,0,0,*)<br>(4,0,0,*)              | (0,0,0,*)<br>(1,0,0,*)<br>(2,0,0,*)<br>(3,0,0,*)<br>(4,0,0,*)              | (0,0,0,*)<br>(1,0,0,*)<br>(2,0,0,*)<br>(3,0,0,*)<br>(4,0,0,*)              | (0,0,0,*)<br>(0,0,1,*)<br>(1,0,0,*)<br>(1,0,1,*)<br>(2,0,0,*)              |
| 57            | (0,0,0,*)<br>(0,0,1,*)<br>(1,0,0,*)<br>(1,0,1,*)<br>(2,0,0,*)<br>(2,0,1,*) | (0,0,0,*)<br>(0,0,1,*)<br>(1,0,0,*)<br>(1,0,1,*)<br>(2,0,0,*)<br>(2,0,1,*) | (0,0,0,*)<br>(0,0,1,*)<br>(1,0,0,*)<br>(1,0,1,*)<br>(2,0,0,*)<br>(2,0,1,*) | (0,0,0,*)<br>(1,0,0,*)<br>(2,0,0,*)<br>(3,0,0,*)<br>(4,0,0,*)<br>(5,0,0,*) | (0,0,0,*)<br>(1,0,0,*)<br>(2,0,0,*)<br>(3,0,0,*)<br>(4,0,0,*)<br>(5,0,0,*) | (0,0,0,*)<br>(1,0,0,*)<br>(2,0,0,*)<br>(3,0,0,*)<br>(4,0,0,*)<br>(5,0,0,*) | (0,0,0,*)<br>(0,0,1,*)<br>(1,0,0,*)<br>(1,0,1,*)<br>(2,0,0,*)<br>(2,0,1,*) |
| 58            | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        |
| 59            | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        |
| 60            | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        |
| 61            | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        |
| 62            | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        |
| 63            | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        | N/A                                                                        |
| NOTE: * UpPTS |                                                                            |                                                                            |                                                                            |                                                                            |                                                                            |                                                                            |                                                                            |

## 5.7.2 Preamble sequence generation

The random access preambles are generated from Zadoff-Chu sequences with zero correlation zone, generated from one or several root Zadoff-Chu sequences. The network configures the set of preamble sequences the UE is allowed to use.

There are up to two sets of 64 preambles available in a cell where Set 1 corresponds to higher layer PRACH configuration using *prach-ConfigurationIndex* and *prach-FrequencyOffset* and Set 2, if configured, corresponds to higher layer PRACH configuration using *prach-ConfigurationIndexHighSpeed* and *prach-FrequencyOffsetHighSpeed*. The set of 64 preamble sequences in a cell is found by including first, in the order of increasing cyclic shift, all the available cyclic shifts of a root Zadoff-Chu sequence with the logical index *rootSequenceIndexHighSpeed* (for Set 2, if configured) or with the logical index *RACH\_ROOT\_SEQUENCE* (for Set 1), where both *rootSequenceIndexHighSpeed* (if configured) and *RACH\_ROOT\_SEQUENCE* are broadcasted as part of the System Information. Additional preamble sequences, in case 64 preambles cannot be generated from a single root Zadoff-Chu sequence, are obtained from the root sequences with the consecutive logical indexes until all the 64 sequences are found.

The logical root sequence order is cyclic: the logical index 0 is consecutive to 837. The relation between a logical root sequence index and physical root sequence index  $u$  is given by Tables 5.7.2-4 and 5.7.2-5 for preamble formats 0 – 3 and 4, respectively.

The  $u^{\text{th}}$  root Zadoff-Chu sequence is defined by

$$x_u(n) = e^{-j \frac{\pi u n(n+1)}{N_{\text{ZC}}}}, \quad 0 \leq n \leq N_{\text{ZC}} - 1$$

where the length  $N_{\text{ZC}}$  of the Zadoff-Chu sequence is given by Table 5.7.2-1. From the  $u^{\text{th}}$  root Zadoff-Chu sequence, random access preambles with zero correlation zones of length  $N_{\text{CS}} - 1$  are defined by cyclic shifts according to

$$x_{u,v}(n) = x_u((n + C_v) \bmod N_{\text{ZC}})$$

where the cyclic shift is given by

$$C_v = \begin{cases} vN_{\text{CS}} & v = 0, 1, \dots, \lfloor N_{\text{ZC}}/N_{\text{CS}} \rfloor - 1, N_{\text{CS}} \neq 0 & \text{for unrestricted sets} \\ 0 & N_{\text{CS}} = 0 & \text{for unrestricted sets} \\ d_{\text{start}}^{\text{RA}} \lfloor v/n_{\text{shift}}^{\text{RA}} \rfloor + (v \bmod n_{\text{shift}}^{\text{RA}})N_{\text{CS}} & v = 0, 1, \dots, w-1 & \text{for restricted sets type A and B} \\ \overline{\overline{d}}_{\text{start}}^{\text{RA}} + (v-w)N_{\text{CS}} & v = w, \dots, w + \overline{\overline{n}}_{\text{shift}}^{\text{RA}} - 1 & \text{for restricted sets type B} \\ \overline{\overline{d}}_{\text{start}}^{\text{RA}} + (v-w-\overline{\overline{n}}_{\text{shift}}^{\text{RA}})N_{\text{CS}} & v = w + \overline{\overline{n}}_{\text{shift}}^{\text{RA}}, \dots, w + \overline{\overline{n}}_{\text{shift}}^{\text{RA}} + \overline{\overline{n}}_{\text{shift}}^{\text{RA}} - 1 & \text{for restricted sets type B} \end{cases}$$

$$w = n_{\text{shift}}^{\text{RA}} n_{\text{group}}^{\text{RA}} + \overline{\overline{n}}_{\text{shift}}^{\text{RA}}$$

and  $N_{\text{CS}}$  is given by Tables 5.7.2-2 and 5.7.2-3 for preamble formats 0-3 and 4, respectively, where the higher-layer parameters *zeroCorrelationZoneConfig* and *zeroCorrelationZoneConfigHighSpeed* shall be used for PRACH preamble Set 1 and Set 2 (if configured), respectively. Restricted set type B shall be used for PRACH preamble Set 2 (if configured), and the parameter *High-speed-flag* provided by higher layers determines if unrestricted set or restricted set type A shall be used for PRACH preamble Set 1.

The variable  $d_u$  is the cyclic shift corresponding to a Doppler shift of magnitude  $1/T_{\text{SEQ}}$  and is given by

$$d_u = \begin{cases} p & 0 \leq p < N_{\text{ZC}}/2 \\ N_{\text{ZC}} - p & \text{otherwise} \end{cases}$$

where  $p$  is the smallest non-negative integer that fulfils  $(pu) \bmod N_{\text{ZC}} = 1$ . The parameters for restricted sets of cyclic shifts depend on  $d_u$ .

For restricted set type A and  $N_{\text{CS}} \leq d_u < N_{\text{ZC}}/3$ , the parameters are given by

$$\begin{aligned}
n_{\text{shift}}^{\text{RA}} &= \lfloor d_u / N_{\text{CS}} \rfloor \\
d_{\text{start}} &= 2d_u + n_{\text{shift}}^{\text{RA}} N_{\text{CS}} \\
n_{\text{group}}^{\text{RA}} &= \lfloor N_{\text{ZC}} / d_{\text{start}} \rfloor \\
\bar{n}_{\text{shift}}^{\text{RA}} &= \max\left(\lfloor (N_{\text{ZC}} - 2d_u - n_{\text{group}}^{\text{RA}} d_{\text{start}}) / N_{\text{CS}} \rfloor, 0\right)
\end{aligned}$$

For restricted set type A and  $N_{\text{ZC}}/3 \leq d_u \leq (N_{\text{ZC}} - N_{\text{CS}})/2$ , the parameters are given by

$$\begin{aligned}
n_{\text{shift}}^{\text{RA}} &= \lfloor (N_{\text{ZC}} - 2d_u) / N_{\text{CS}} \rfloor \\
d_{\text{start}} &= N_{\text{ZC}} - 2d_u + n_{\text{shift}}^{\text{RA}} N_{\text{CS}} \\
n_{\text{group}}^{\text{RA}} &= \lfloor d_u / d_{\text{start}} \rfloor \\
\bar{n}_{\text{shift}}^{\text{RA}} &= \min\left(\max\left(\lfloor (d_u - n_{\text{group}}^{\text{RA}} d_{\text{start}}) / N_{\text{CS}} \rfloor, 0\right), n_{\text{shift}}^{\text{RA}}\right)
\end{aligned}$$

For restricted set type B and  $N_{\text{CS}} \leq d_u < N_{\text{ZC}}/5$ , the parameters are given by

$$\begin{aligned}
n_{\text{shift}}^{\text{RA}} &= \lfloor d_u / N_{\text{CS}} \rfloor \\
d_{\text{start}} &= 4d_u + n_{\text{shift}}^{\text{RA}} N_{\text{CS}} \\
n_{\text{group}}^{\text{RA}} &= \lfloor N_{\text{ZC}} / d_{\text{start}} \rfloor \\
\bar{n}_{\text{shift}}^{\text{RA}} &= \max\left(\lfloor (N_{\text{ZC}} - 4d_u - n_{\text{group}}^{\text{RA}} d_{\text{start}}) / N_{\text{CS}} \rfloor, 0\right)
\end{aligned}$$

For restricted set type B and  $N_{\text{ZC}}/5 \leq d_u \leq (N_{\text{ZC}} - N_{\text{CS}})/4$ , the parameters are given by

$$\begin{aligned}
n_{\text{shift}}^{\text{RA}} &= \lfloor (N_{\text{ZC}} - 4d_u) / N_{\text{CS}} \rfloor \\
d_{\text{start}} &= N_{\text{ZC}} - 4d_u + n_{\text{shift}}^{\text{RA}} N_{\text{CS}} \\
n_{\text{group}}^{\text{RA}} &= \lfloor d_u / d_{\text{start}} \rfloor \\
\bar{n}_{\text{shift}}^{\text{RA}} &= \min\left(\max\left(\lfloor (d_u - n_{\text{group}}^{\text{RA}} d_{\text{start}}) / N_{\text{CS}} \rfloor, 0\right), n_{\text{shift}}^{\text{RA}}\right)
\end{aligned}$$

For restricted set type B and  $(N_{\text{ZC}} + N_{\text{CS}})/4 \leq d_u < 2N_{\text{ZC}}/7$ , the parameters are given by

$$\begin{aligned}
n_{\text{shift}}^{\text{RA}} &= \lfloor (4d_u - N_{\text{ZC}}) / N_{\text{CS}} \rfloor \\
d_{\text{start}} &= 4d_u - N_{\text{ZC}} + n_{\text{shift}}^{\text{RA}} N_{\text{CS}} \\
\bar{d}_{\text{start}} &= N_{\text{ZC}} - 3d_u + n_{\text{group}}^{\text{RA}} d_{\text{start}} + \bar{n}_{\text{shift}}^{\text{RA}} N_{\text{CS}} \\
\bar{\bar{d}}_{\text{start}} &= N_{\text{ZC}} - 2d_u + n_{\text{group}}^{\text{RA}} d_{\text{start}} + \bar{\bar{n}}_{\text{shift}}^{\text{RA}} N_{\text{CS}} \\
n_{\text{group}}^{\text{RA}} &= \lfloor d_u / d_{\text{start}} \rfloor \\
\bar{n}_{\text{shift}}^{\text{RA}} &= \max\left(\lfloor (N_{\text{ZC}} - 3d_u - n_{\text{group}}^{\text{RA}} d_{\text{start}}) / N_{\text{CS}} \rfloor, 0\right) \\
\bar{\bar{n}}_{\text{shift}}^{\text{RA}} &= \left\lfloor \min\left(d_u - n_{\text{group}}^{\text{RA}} d_{\text{start}}, 4d_u - N_{\text{ZC}} - \bar{n}_{\text{shift}}^{\text{RA}} N_{\text{CS}}\right) / N_{\text{CS}} \right\rfloor \\
\bar{\bar{\bar{n}}}_{\text{shift}}^{\text{RA}} &= \left\lfloor \left(1 - \min(1, \bar{n}_{\text{shift}}^{\text{RA}})\right) \left(d_u - n_{\text{group}}^{\text{RA}} d_{\text{start}}\right) + \min(1, \bar{\bar{n}}_{\text{shift}}^{\text{RA}}) \left(4d_u - N_{\text{ZC}} - \bar{n}_{\text{shift}}^{\text{RA}} N_{\text{CS}}\right) / N_{\text{CS}} \right\rfloor - \bar{\bar{n}}_{\text{shift}}^{\text{RA}}
\end{aligned}$$

For restricted set type B and  $2N_{\text{ZC}}/7 \leq d_u \leq (N_{\text{ZC}} - N_{\text{CS}})/3$ , the parameters are given by

$$\begin{aligned}
n_{\text{shift}}^{\text{RA}} &= \lfloor (N_{\text{ZC}} - 3d_u) / N_{\text{CS}} \rfloor \\
d_{\text{start}} &= N_{\text{ZC}} - 3d_u + n_{\text{shift}}^{\text{RA}} N_{\text{CS}} \\
\bar{d}_{\text{start}} &= d_u + n_{\text{group}}^{\text{RA}} d_{\text{start}} + \bar{n}_{\text{shift}}^{\text{RA}} N_{\text{CS}} \\
\bar{\bar{d}}_{\text{start}} &= 0 \\
n_{\text{group}}^{\text{RA}} &= \lfloor d_u / d_{\text{start}} \rfloor \\
\bar{n}_{\text{shift}}^{\text{RA}} &= \max(\lfloor (4d_u - N_{\text{ZC}} - n_{\text{group}}^{\text{RA}} d_{\text{start}}) / N_{\text{CS}} \rfloor, 0) \\
\bar{\bar{n}}_{\text{shift}}^{\text{RA}} &= \lfloor \min(d_u - n_{\text{group}}^{\text{RA}} d_{\text{start}}, N_{\text{ZC}} - 3d_u - \bar{n}_{\text{shift}}^{\text{RA}} N_{\text{CS}}) / N_{\text{CS}} \rfloor \\
\bar{\bar{\bar{n}}}_{\text{shift}}^{\text{RA}} &= 0
\end{aligned}$$

For restricted set type B and  $(N_{\text{ZC}} + N_{\text{CS}}) / 3 \leq d_u < 2N_{\text{ZC}} / 5$ , the parameters are given by

$$\begin{aligned}
n_{\text{shift}}^{\text{RA}} &= \lfloor (3d_u - N_{\text{ZC}}) / N_{\text{CS}} \rfloor \\
d_{\text{start}} &= 3d_u - N_{\text{ZC}} + n_{\text{shift}}^{\text{RA}} N_{\text{CS}} \\
\bar{d}_{\text{start}} &= 0 \\
\bar{\bar{d}}_{\text{start}} &= 0 \\
n_{\text{group}}^{\text{RA}} &= \lfloor d_u / d_{\text{start}} \rfloor \\
\bar{n}_{\text{shift}}^{\text{RA}} &= \max(\lfloor (N_{\text{ZC}} - 2d_u - n_{\text{group}}^{\text{RA}} d_{\text{start}}) / N_{\text{CS}} \rfloor, 0) \\
\bar{\bar{n}}_{\text{shift}}^{\text{RA}} &= 0 \\
\bar{\bar{\bar{n}}}_{\text{shift}}^{\text{RA}} &= 0
\end{aligned}$$

For restricted set type B and  $2N_{\text{ZC}} / 5 \leq d_u \leq (N_{\text{ZC}} - N_{\text{CS}}) / 2$ , the parameters are given by

$$\begin{aligned}
n_{\text{shift}}^{\text{RA}} &= \lfloor (N_{\text{ZC}} - 2d_u) / N_{\text{CS}} \rfloor \\
d_{\text{start}} &= 2(N_{\text{ZC}} - 2d_u) + n_{\text{shift}}^{\text{RA}} N_{\text{CS}} \\
\bar{d}_{\text{start}} &= 0 \\
\bar{\bar{d}}_{\text{start}} &= 0 \\
n_{\text{group}}^{\text{RA}} &= \lfloor (N_{\text{ZC}} - d_u) / d_{\text{start}} \rfloor \\
\bar{n}_{\text{shift}}^{\text{RA}} &= \max(\lfloor (3d_u - N_{\text{ZC}} - n_{\text{group}}^{\text{RA}} d_{\text{start}}) / N_{\text{CS}} \rfloor, 0) \\
\bar{\bar{n}}_{\text{shift}}^{\text{RA}} &= 0 \\
\bar{\bar{\bar{n}}}_{\text{shift}}^{\text{RA}} &= 0
\end{aligned}$$

For all other values of  $d_u$ , there are no cyclic shifts in the restricted set.

**Table 5.7.2-1: Random access preamble sequence length**

| Preamble format | $N_{\text{ZC}}$ |
|-----------------|-----------------|
| 0 – 3           | 839             |
| 4               | 139             |

**Table 5.7.2-2:  $N_{\text{CS}}$  for preamble generation (preamble formats 0-3)**

| zeroCorrelationZoneConfig,<br>zeroCorrelationZoneConfigHighSpeed | $N_{\text{CS}}$ value |                       |                       |
|------------------------------------------------------------------|-----------------------|-----------------------|-----------------------|
|                                                                  | Unrestricted set      | Restricted set type A | Restricted set type B |

|    |     |     |     |
|----|-----|-----|-----|
| 0  | 0   | 15  | 15  |
| 1  | 13  | 18  | 18  |
| 2  | 15  | 22  | 22  |
| 3  | 18  | 26  | 26  |
| 4  | 22  | 32  | 32  |
| 5  | 26  | 38  | 38  |
| 6  | 32  | 46  | 46  |
| 7  | 38  | 55  | 55  |
| 8  | 46  | 68  | 68  |
| 9  | 59  | 82  | 82  |
| 10 | 76  | 100 | 100 |
| 11 | 93  | 128 | 118 |
| 12 | 119 | 158 | 137 |
| 13 | 167 | 202 | -   |
| 14 | 279 | 237 | -   |
| 15 | 419 | -   | -   |

Table 5.7.2-3:  $N_{CS}$  for preamble generation (preamble format 4)

| zeroCorrelationZoneConfig | $N_{CS}$ value |
|---------------------------|----------------|
| 0                         | 2              |
| 1                         | 4              |
| 2                         | 6              |
| 3                         | 8              |
| 4                         | 10             |
| 5                         | 12             |
| 6                         | 15             |
| 7                         | N/A            |
| 8                         | N/A            |
| 9                         | N/A            |
| 10                        | N/A            |
| 11                        | N/A            |
| 12                        | N/A            |
| 13                        | N/A            |
| 14                        | N/A            |
| 15                        | N/A            |

Table 5.7.2-4: Root Zadoff-Chu sequence order for preamble formats 0 – 3

| Logical root sequence number | Physical root sequence number $u$<br>(in increasing order of the corresponding logical sequence number)                                                                                                                                                                                                                |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0–23                         | 129, 710, 140, 699, 120, 719, 210, 629, 168, 671, 84, 755, 105, 734, 93, 746, 70, 769, 60, 779, 2, 837, 1, 838                                                                                                                                                                                                         |
| 24–29                        | 56, 783, 112, 727, 148, 691                                                                                                                                                                                                                                                                                            |
| 30–35                        | 80, 759, 42, 797, 40, 799                                                                                                                                                                                                                                                                                              |
| 36–41                        | 35, 804, 73, 766, 146, 693                                                                                                                                                                                                                                                                                             |
| 42–51                        | 31, 808, 28, 811, 30, 809, 27, 812, 29, 810                                                                                                                                                                                                                                                                            |
| 52–63                        | 24, 815, 48, 791, 68, 771, 74, 765, 178, 661, 136, 703                                                                                                                                                                                                                                                                 |
| 64–75                        | 86, 753, 78, 761, 43, 796, 39, 800, 20, 819, 21, 818                                                                                                                                                                                                                                                                   |
| 76–89                        | 95, 744, 202, 637, 190, 649, 181, 658, 137, 702, 125, 714, 151, 688                                                                                                                                                                                                                                                    |
| 90–115                       | 217, 622, 128, 711, 142, 697, 122, 717, 203, 636, 118, 721, 110, 729, 89, 750, 103, 736, 61, 778, 55, 784, 15, 824, 14, 825                                                                                                                                                                                            |
| 116–135                      | 12, 827, 23, 816, 34, 805, 37, 802, 46, 793, 207, 632, 179, 660, 145, 694, 130, 709, 223, 616                                                                                                                                                                                                                          |
| 136–167                      | 228, 611, 227, 612, 132, 707, 133, 706, 143, 696, 135, 704, 161, 678, 201, 638, 173, 666, 106, 733, 83, 756, 91, 748, 66, 773, 53, 786, 10, 829, 9, 830                                                                                                                                                                |
| 168–203                      | 7, 832, 8, 831, 16, 823, 47, 792, 64, 775, 57, 782, 104, 735, 101, 738, 108, 731, 208, 631, 184, 655, 197, 642, 191, 648, 121, 718, 141, 698, 149, 690, 216, 623, 218, 621                                                                                                                                             |
| 204–263                      | 152, 687, 144, 695, 134, 705, 138, 701, 199, 640, 162, 677, 176, 663, 119, 720, 158, 681, 164, 675, 174, 665, 171, 668, 170, 669, 87, 752, 169, 670, 88, 751, 107, 732, 81, 758, 82, 757, 100, 739, 98, 741, 71, 768, 59, 780, 65, 774, 50, 789, 49, 790, 26, 813, 17, 822, 13, 826, 6, 833                            |
| 264–327                      | 5, 834, 33, 806, 51, 788, 75, 764, 99, 740, 96, 743, 97, 742, 166, 673, 172, 667, 175, 664, 187, 652, 163, 676, 185, 654, 200, 639, 114, 725, 189, 650, 115, 724, 194, 645, 195, 644, 192, 647, 182, 657, 157, 682, 156, 683, 211, 628, 154, 685, 123, 716, 139, 700, 212, 627, 153, 686, 213, 626, 215, 624, 150, 689 |

|         |                                                                                                                                                                                                                                                                                                                                                         |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 328–383 | 225, 614, 224, 615, 221, 618, 220, 619, 127, 712, 147, 692, 124, 715, 193, 646, 205, 634, 206, 633, 116, 723, 160, 679, 186, 653, 167, 672, 79, 760, 85, 754, 77, 762, 92, 747, 58, 781, 62, 777, 69, 770, 54, 785, 36, 803, 32, 807, 25, 814, 18, 821, 11, 828, 4, 835                                                                                 |
| 384–455 | 3, 836, 19, 820, 22, 817, 41, 798, 38, 801, 44, 795, 52, 787, 45, 794, 63, 776, 67, 772, 72, 767, 76, 763, 94, 745, 102, 737, 90, 749, 109, 730, 165, 674, 111, 728, 209, 630, 204, 635, 117, 722, 188, 651, 159, 680, 198, 641, 113, 726, 183, 656, 180, 659, 177, 662, 196, 643, 155, 684, 214, 625, 126, 713, 131, 708, 219, 620, 222, 617, 226, 613 |
| 456–513 | 230, 609, 232, 607, 262, 577, 252, 587, 418, 421, 416, 423, 413, 426, 411, 428, 376, 463, 395, 444, 283, 556, 285, 554, 379, 460, 390, 449, 363, 476, 384, 455, 388, 451, 386, 453, 361, 478, 387, 452, 360, 479, 310, 529, 354, 485, 328, 511, 315, 524, 337, 502, 349, 490, 335, 504, 324, 515                                                        |
| 514–561 | 323, 516, 320, 519, 334, 505, 359, 480, 295, 544, 385, 454, 292, 547, 291, 548, 381, 458, 399, 440, 380, 459, 397, 442, 369, 470, 377, 462, 410, 429, 407, 432, 281, 558, 414, 425, 247, 592, 277, 562, 271, 568, 272, 567, 264, 575, 259, 580                                                                                                          |
| 562–629 | 237, 602, 239, 600, 244, 595, 243, 596, 275, 564, 278, 561, 250, 589, 246, 593, 417, 422, 248, 591, 394, 445, 393, 446, 370, 469, 365, 474, 300, 539, 299, 540, 364, 475, 362, 477, 298, 541, 312, 527, 313, 526, 314, 525, 353, 486, 352, 487, 343, 496, 327, 512, 350, 489, 326, 513, 319, 520, 332, 507, 333, 506, 348, 491, 347, 492, 322, 517      |
| 630–659 | 330, 509, 338, 501, 341, 498, 340, 499, 342, 497, 301, 538, 366, 473, 401, 438, 371, 468, 408, 431, 375, 464, 249, 590, 269, 570, 238, 601, 234, 605                                                                                                                                                                                                    |
| 660–707 | 257, 582, 273, 566, 255, 584, 254, 585, 245, 594, 251, 588, 412, 427, 372, 467, 282, 557, 403, 436, 396, 443, 392, 447, 391, 448, 382, 457, 389, 450, 294, 545, 297, 542, 311, 528, 344, 495, 345, 494, 318, 521, 331, 508, 325, 514, 321, 518                                                                                                          |
| 708–729 | 346, 493, 339, 500, 351, 488, 306, 533, 289, 550, 400, 439, 378, 461, 374, 465, 415, 424, 270, 569, 241, 598                                                                                                                                                                                                                                            |
| 730–751 | 231, 608, 260, 579, 268, 571, 276, 563, 409, 430, 398, 441, 290, 549, 304, 535, 308, 531, 358, 481, 316, 523                                                                                                                                                                                                                                            |
| 752–765 | 293, 546, 288, 551, 284, 555, 368, 471, 253, 586, 256, 583, 263, 576                                                                                                                                                                                                                                                                                    |
| 766–777 | 242, 597, 274, 565, 402, 437, 383, 456, 357, 482, 329, 510                                                                                                                                                                                                                                                                                              |
| 778–789 | 317, 522, 307, 532, 286, 553, 287, 552, 266, 573, 261, 578                                                                                                                                                                                                                                                                                              |
| 790–795 | 236, 603, 303, 536, 356, 483                                                                                                                                                                                                                                                                                                                            |
| 796–803 | 355, 484, 405, 434, 404, 435, 406, 433                                                                                                                                                                                                                                                                                                                  |
| 804–809 | 235, 604, 267, 572, 302, 537                                                                                                                                                                                                                                                                                                                            |
| 810–815 | 309, 530, 265, 574, 233, 606                                                                                                                                                                                                                                                                                                                            |
| 816–819 | 367, 472, 296, 543                                                                                                                                                                                                                                                                                                                                      |
| 820–837 | 336, 503, 305, 534, 373, 466, 280, 559, 279, 560, 419, 420, 240, 599, 258, 581, 229, 610                                                                                                                                                                                                                                                                |

Table 5.7.2-5: Root Zadoff-Chu sequence order for preamble format 4

| Logical root<br>sequence number | Physical root sequence number $u$<br>(in increasing order of the corresponding logical sequence number) |     |    |     |    |     |    |     |    |     |    |     |    |     |    |     |    |     |    |     |
|---------------------------------|---------------------------------------------------------------------------------------------------------|-----|----|-----|----|-----|----|-----|----|-----|----|-----|----|-----|----|-----|----|-----|----|-----|
|                                 | 1                                                                                                       | 138 | 2  | 137 | 3  | 136 | 4  | 135 | 5  | 134 | 6  | 133 | 7  | 132 | 8  | 131 | 9  | 130 | 10 | 129 |
| 0 – 19                          | 11                                                                                                      | 128 | 12 | 127 | 13 | 126 | 14 | 125 | 15 | 124 | 16 | 123 | 17 | 122 | 18 | 121 | 19 | 120 | 20 | 119 |
| 20 – 39                         | 21                                                                                                      | 118 | 22 | 117 | 23 | 116 | 24 | 115 | 25 | 114 | 26 | 113 | 27 | 112 | 28 | 111 | 29 | 110 | 30 | 109 |
| 40 – 59                         | 31                                                                                                      | 108 | 32 | 107 | 33 | 106 | 34 | 105 | 35 | 104 | 36 | 103 | 37 | 102 | 38 | 101 | 39 | 100 | 40 | 99  |
| 60 – 79                         | 41                                                                                                      | 98  | 42 | 97  | 43 | 96  | 44 | 95  | 45 | 94  | 46 | 93  | 47 | 92  | 48 | 91  | 49 | 90  | 50 | 89  |
| 80 – 99                         | 51                                                                                                      | 88  | 52 | 87  | 53 | 86  | 54 | 85  | 55 | 84  | 56 | 83  | 57 | 82  | 58 | 81  | 59 | 80  | 60 | 79  |
| 100 – 119                       | 61                                                                                                      | 78  | 62 | 77  | 63 | 76  | 64 | 75  | 65 | 74  | 66 | 73  | 67 | 72  | 68 | 71  | 69 | 70  | -  | -   |
| 120 – 137                       |                                                                                                         |     |    |     |    |     |    |     |    |     |    |     |    |     |    |     |    |     |    |     |
| 138 – 837                       | N/A                                                                                                     |     |    |     |    |     |    |     |    |     |    |     |    |     |    |     |    |     |    |     |

### 5.7.3 Baseband signal generation

The time-continuous random access signal  $s(t)$  is defined by

$$s(t) = \beta_{\text{PRACH}} \sum_{k=0}^{N_{\text{ZC}}-1} \sum_{n=0}^{N_{\text{ZC}}-1} x_{u,v}(n) \cdot e^{-j \frac{2\pi n k}{N_{\text{ZC}}}} \cdot e^{j 2\pi (k + \varphi + K(k_0 + \frac{1}{2})) \Delta f_{\text{RA}} (t - T_{\text{CP}})}$$


where  $0 \leq t < T_{\text{SEQ}} + T_{\text{CP}}$ ,  $\beta_{\text{PRACH}}$  is an amplitude scaling factor in order to conform to the transmit power  $P_{\text{PRACH}}$  specified in clause 6.1 in TS 36.213 [4], and  $k_0 = n_{\text{PRB}}^{\text{RA}} N_{\text{sc}}^{\text{RB}} - N_{\text{RB}}^{\text{UL}} N_{\text{sc}}^{\text{RB}} / 2$ . The location in the frequency domain is controlled by the parameter  $n_{\text{PRB}}^{\text{RA}}$  is derived from clause 5.7.1. The factor  $K = \Delta f / \Delta f_{\text{RA}}$  accounts for the difference in subcarrier spacing between the random access preamble and uplink data transmission. The variable  $\Delta f_{\text{RA}}$ , the subcarrier spacing for the random access preamble, and the variable  $\varphi$ , a fixed offset determining the frequency-domain location of the random access preamble within the physical resource blocks, are both given by Table 5.7.3-1.

Table 5.7.3-1: Random access baseband parameters

| Preamble format | $\Delta f_{\text{RA}}$ | $\varphi$ |
|-----------------|------------------------|-----------|
| 0 – 3           | 1250 Hz                | 7         |
| 4               | 7500 Hz                | 2         |

## 5.8 Modulation and upconversion

Modulation and upconversion to the carrier frequency of the complex-valued SC-FDMA baseband signal for each antenna port or the complex-valued PRACH baseband signal is shown in Figure 5.8-1. The filtering required prior to transmission is defined by the requirements in TS 36.101 [7].

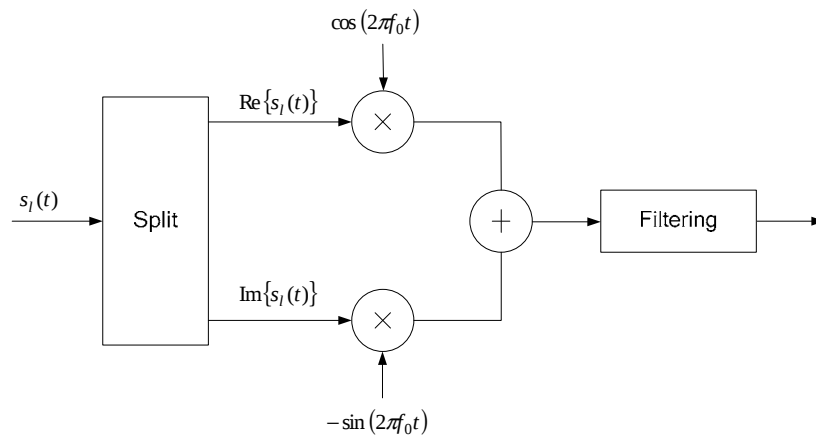

**Figure 5.8-1: Uplink modulation**

---

## 6 Downlink

### 6.1 Overview

The smallest time-frequency unit for downlink transmission is denoted a resource element and is defined in clause 6.2.2.

A subset of the downlink subframes in a radio frame can be configured as MBSFN subframes by higher layers. For  $\Delta f \approx 0.37$  kHz the MBSFN region is defined as one slot of 3 ms. Except for  $\Delta f \approx 0.37$  kHz, each MBSFN subframe is divided into a non-MBSFN region and an MBSFN region.

- For subframes using  $\Delta f = 15$  kHz, the non-MBSFN region spans the first one or two OFDM symbols in an MBSFN subframe where the length of the non-MBSFN region is given according to Clause 6.7.
- For subframes using  $\Delta f = 7.5$  kHz,  $\Delta f = 2.5$  kHz,  $\Delta f = 1.25$  kHz, or slots using  $\Delta f \approx 0.37$  kHz, the non-MBSFN region is of zero size.
- The MBSFN region in an MBSFN subframe is defined as the OFDM symbols not used for the non-MBSFN region.

For an MBMS-dedicated cell, subframes where PSS/SSS/PBCH or PDSCH carrying system information are transmitted with  $\Delta f = 15$  kHz are non-MBSFN subframes.

For frame structure type 3, MBSFN configuration shall not be applied to downlink subframes in which at least one OFDM symbol is not occupied or discovery signal is transmitted.

Unless otherwise specified, transmission in each downlink subframe shall use the same cyclic prefix length as used for downlink subframe #0.

#### 6.1.1 Physical channels

A downlink physical channel corresponds to a set of resource elements carrying information originating from higher layers and is the interface defined between TS 36.212 [3] and the present document TS 36.211.

The following downlink physical channels are defined:

- Physical Downlink Shared Channel, PDSCH
- Physical Broadcast Channel, PBCH
- Physical Multicast Channel, PMCH
- Physical Control Format Indicator Channel, PCFICH
- Physical Downlink Control Channel, PDCCH
- Physical Hybrid ARQ Indicator Channel, PHICH
- Enhanced Physical Downlink Control Channel, EPDCCH
- MTC Physical Downlink Control Channel, MPDCCH
- Short Physical Downlink Control Channel, SPDCCH

#### 6.1.2 Physical signals

A downlink physical signal corresponds to a set of resource elements used by the physical layer but does not carry information originating from higher layers. The following downlink physical signals are defined:

- Reference signal

- Synchronization signal
- Discovery signal
- MTC wake-up signal, MWUS

## 6.2 Slot structure and physical resource elements

### 6.2.1 Resource grid

The transmitted signal in each slot is described by one or several resource grids of  $N_{RB}^{DL} N_{sc}^{RB}$  subcarriers and  $N_{symb}^{DL}$  OFDM symbols. The resource grid structure is illustrated in Figure 6.2.2-1. The quantity  $N_{RB}^{DL}$  depends on the downlink transmission bandwidth configured in the cell and shall fulfil

$$N_{RB}^{min,DL} \leq N_{RB}^{DL} \leq N_{RB}^{max,DL}$$

where  $N_{RB}^{min,DL} = 6$  and  $N_{RB}^{max,DL} = 110$  are the smallest and largest downlink bandwidths, respectively, supported by the current version of this specification.

The set of allowed values for  $N_{RB}^{DL}$  is given by TS 36.104 [6]. The number of OFDM symbols in a slot depends on the cyclic prefix length and subcarrier spacing configured and is given in Table 6.2.3-1.

An antenna port is defined such that the channel over which a symbol on the antenna port is conveyed can be inferred from the channel over which another symbol on the same antenna port is conveyed. For MBSFN reference signals, positioning reference signals, UE-specific reference signals associated with PDSCH, demodulation reference signals associated with SPDCCH, and demodulation reference signals associated with EPDCCH, there are limits given below within which the channel can be inferred from one symbol to another symbol on the same antenna port. There is one resource grid per antenna port. The set of antenna ports supported depends on the reference signal configuration in the cell:

- Cell-specific reference signals support a configuration of one, two, or four antenna ports and are transmitted on antenna ports  $p = 0$ ,  $p \in \{0,1\}$ , and  $p \in \{0,1,2,3\}$ , respectively.
- MBSFN reference signals are transmitted on antenna port  $p = 4$ . The channel over which a symbol on antenna port  $p = 4$  is conveyed can be inferred from the channel over which another symbol on the same antenna port is conveyed only if the two symbols correspond to subframes (slots in case of 0.37 kHz subcarrier spacing) of the same MBSFN area.
- UE-specific reference signals associated with PDSCH intended for non-BL/CE UE are transmitted on antenna port(s)  $p = 5$ ,  $p = 7$ ,  $p = 8$ , or one or several of  $p \in \{7,8,9,10,11,12,13,14\}$ . The channel over which a symbol on one of these antenna ports is conveyed can be inferred from the channel over which another symbol on the same antenna port is conveyed only if the two symbols are within the same subframe and in the same PRG when PRB bundling is used or in the same PRB pair when PRB bundling is not used.
- UE-specific reference signals associated with PDSCH intended for BL/CE UE are transmitted on one or several of antenna port(s)  $p \in \{7,8,9,10,11,12,13,14\}$ . The channel over which a symbol on one of these antenna ports is conveyed can be inferred from the channel over which another symbol on the same antenna port is conveyed only if the two symbols are in the same set of  $N_{NB}^{ch,DL}$  consecutive subframes and have the same PRB index.
- Demodulation reference signals associated with EPDCCH are transmitted on one or several of  $p \in \{107,108,109,110\}$ . The channel over which a symbol on one of these antenna ports is conveyed can be inferred from the channel over which another symbol on the same antenna port is conveyed only if the two symbols are in the same PRB pair.
- Demodulation reference signals associated with MPDCCH are transmitted on one or several of  $p \in \{107,108,109,110\}$ . The channel over which a symbol on one of these antenna ports is conveyed can be inferred from the channel over which another symbol on the same antenna port is conveyed only if the two

symbols are in the same set of  $N_{\text{NB}}^{\text{ch,DL}}$  consecutive subframes and have the same PRB index.

- Demodulation reference signals associated with SPDCCH are transmitted on  $p \in \{107\}$ .
- Positioning reference signals are transmitted on antenna port  $p = 6$ . The channel over which a symbol on antenna port  $p = 6$  is conveyed can be inferred from the channel over which another symbol on the same antenna port is conveyed only within one positioning reference signal occasion consisting of  $N_{\text{PRS}}$  consecutive downlink subframes, where  $N_{\text{PRS}}$  is configured by higher layers.
- CSI reference signals support a configuration of 1, 2, 4, 8, 12, 16, 20, 24, 28, or 32 antenna ports and are transmitted on antenna ports  $p = 15$ ,  $p = 15, 16$ ,  $p = 15, \dots, 18$ ,  $p = 15, \dots, 22$ ,  $p = 15, \dots, 26$ ,  $p = 15, \dots, 30$ ,  $p = 15, \dots, 34$ ,  $p = 15, \dots, 38$ ,  $p = 15, \dots, 42$  and  $p = 15, \dots, 46$ , respectively.

Two antenna ports are said to be quasi co-located if the large-scale properties of the channel over which a symbol on one antenna port is conveyed can be inferred from the channel over which a symbol on the other antenna port is conveyed. The large-scale properties include one or more of delay spread, Doppler spread, Doppler shift, average gain, and average delay.

## 6.2.2 Resource elements

Each element in the resource grid for antenna port  $p$  is called a resource element and is uniquely identified by the index pair  $(k, l)$  in a slot where  $k = 0, \dots, N_{\text{RB}}^{\text{DL}} N_{\text{sc}}^{\text{RB}} - 1$  and  $l = 0, \dots, N_{\text{syml}}^{\text{DL}} - 1$  are the indices in the frequency and time domains, respectively. Resource element  $(k, l)$  on antenna port  $p$  corresponds to the complex value  $a_{k,l}^{(p)}$ .

When there is no risk for confusion, or no particular antenna port is specified, the index  $p$  may be dropped.

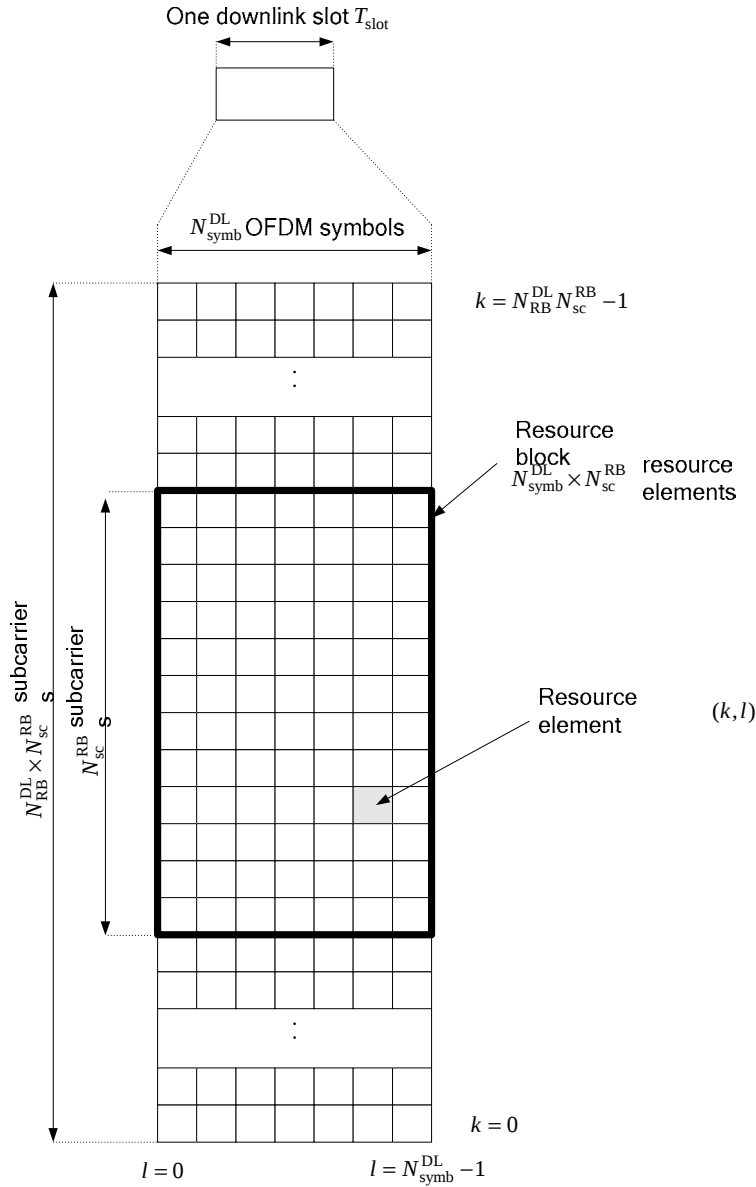


Figure 6.2.2-1: Downlink resource grid

### 6.2.3 Resource blocks

Resource blocks are used to describe the mapping of certain physical channels to resource elements. Physical and virtual resource blocks are defined.

A physical resource block is defined as  $N_{\text{symb}}^{\text{DL}}$  consecutive OFDM symbols in the time domain and  $N_{\text{sc}}^{\text{RB}}$  consecutive subcarriers in the frequency domain, where  $N_{\text{symb}}^{\text{DL}}$  and  $N_{\text{sc}}^{\text{RB}}$  are given by Table 6.2.3-1. A physical resource block thus consists of  $N_{\text{symb}}^{\text{DL}} \times N_{\text{sc}}^{\text{RB}}$  resource elements, corresponding to one slot in the time domain and 180 kHz in the frequency domain.

Physical resource blocks are numbered from 0 to  $N_{\text{RB}}^{\text{DL}} - 1$  in the frequency domain. The relation between the physical resource block number  $n_{\text{PRB}}$  in the frequency domain and resource elements  $(k, l)$  in a slot is given by

$$n_{\text{PRB}} = \left\lfloor \frac{k}{N_{\text{sc}}^{\text{RB}}} \right\rfloor$$

**Table 6.2.3-1: Physical resource blocks parameters**

| Configuration          |                             | $N_{sc}^{RB}$ | $N_{symb}^{DL}$ |
|------------------------|-----------------------------|---------------|-----------------|
| Normal cyclic prefix   | $\Delta f = 15$ kHz         | 12            | 7               |
| Extended cyclic prefix | $\Delta f = 15$ kHz         |               | 6               |
|                        | $\Delta f = 7.5$ kHz        | 24            | 3               |
|                        | $\Delta f = 2.5$ kHz        | 72            | 1               |
|                        | $\Delta f = 1.25$ kHz       | 144           | 1               |
|                        | $\Delta f \approx 0.37$ kHz | 486           | 1               |

Except for subcarrier spacing  $\Delta f = 1.25$  kHz and  $\Delta f \approx 0.37$  kHz, a physical resource-block pair is defined as the two physical resource blocks in one subframe having the same physical resource-block number  $n_{PRB}$ .

A virtual resource block is of the same size as a physical resource block. Two types of virtual resource blocks are defined:

- Virtual resource blocks of localized type
- Virtual resource blocks of distributed type

For each type of virtual resource blocks, a pair of virtual resource blocks over two slots in a subframe is assigned together by a single virtual resource block number,  $n_{VRB}$ .

#### 6.2.3.1 Virtual resource blocks of localized type

Virtual resource blocks of localized type are mapped directly to physical resource blocks such that virtual resource block  $n_{VRB}$  corresponds to physical resource block  $n_{PRB} = n_{VRB}$ . Virtual resource blocks are numbered from 0 to  $N_{VRB}^{DL} - 1$ , where  $N_{VRB}^{DL} = N_{RB}^{DL}$ .

#### 6.2.3.2 Virtual resource blocks of distributed type

Virtual resource blocks of distributed type are mapped to physical resource blocks as described below.

**Table 6.2.3.2-1: RB gap values**

| System BW ( $N_{RB}^{DL}$ ) | Gap ( $N_{gap}$ )                   |                                     |
|-----------------------------|-------------------------------------|-------------------------------------|
|                             | 1 <sup>st</sup> Gap ( $N_{gap,1}$ ) | 2 <sup>nd</sup> Gap ( $N_{gap,2}$ ) |
| 6-10                        | $\lceil N_{RB}^{DL} / 2 \rceil$     | N/A                                 |
| 11                          | 4                                   | N/A                                 |
| 12-19                       | 8                                   | N/A                                 |
| 20-26                       | 12                                  | N/A                                 |
| 27-44                       | 18                                  | N/A                                 |
| 45-49                       | 27                                  | N/A                                 |
| 50-63                       | 27                                  | 9                                   |
| 64-79                       | 32                                  | 16                                  |
| 80-110                      | 48                                  | 16                                  |

The parameter  $N_{gap}$  is given by Table 6.2.3.2-1. For  $6 \leq N_{RB}^{DL} \leq 49$ , only one gap value  $N_{gap,1}$  is defined and  $N_{gap} = N_{gap,1}$ . For  $50 \leq N_{RB}^{DL} \leq 110$ , two gap values  $N_{gap,1}$  and  $N_{gap,2}$  are defined. Whether  $N_{gap} = N_{gap,1}$  or  $N_{gap} = N_{gap,2}$  is signaled as part of the downlink scheduling assignment as described in TS 36.212 [3].

Virtual resource blocks of distributed type are numbered from 0 to  $N_{VRB}^{DL} - 1$ , where

$$N_{VRB}^{DL} = N_{VRB,gap1}^{DL} = 2 \cdot \min(N_{gap}, N_{RB}^{DL} - N_{gap}) \text{ for } N_{gap} = N_{gap,1} \text{ and } N_{VRB}^{DL} = N_{VRB,gap2}^{DL} = \lfloor N_{RB}^{DL} / 2N_{gap} \rfloor \cdot 2N_{gap} \text{ for } N_{gap} = N_{gap,2}$$

$$N_{\text{gap}} = N_{\text{gap},2}.$$

Consecutive  $\tilde{N}_{\text{VRB}}^{\text{DL}}$  VRB numbers compose a unit of VRB number interleaving, where  $\tilde{N}_{\text{VRB}}^{\text{DL}} = N_{\text{VRB}}^{\text{DL}}$  for  $N_{\text{gap}} = N_{\text{gap},1}$  and  $\tilde{N}_{\text{VRB}}^{\text{DL}} = 2N_{\text{gap}}$  for  $N_{\text{gap}} = N_{\text{gap},2}$ . Interleaving of VRB numbers of each interleaving unit is performed with 4 columns and  $N_{\text{row}}$  rows, where  $N_{\text{row}} = \lceil \tilde{N}_{\text{VRB}}^{\text{DL}} / (4P) \rceil \cdot P$ , and  $P$  is RBG size as described in TS 36.213 [4]. VRB numbers are written row by row in the rectangular matrix, and read out column by column.  $N_{\text{null}}$  nulls are inserted in the last  $N_{\text{null}} / 2$  rows of the 2<sup>nd</sup> and 4<sup>th</sup> column, where  $N_{\text{null}} = 4N_{\text{row}} - \tilde{N}_{\text{VRB}}^{\text{DL}}$ . Nulls are ignored when reading out. The VRB numbers mapping to PRB numbers including interleaving is derived as follows:

For even slot number  $n_s$ ;

$$\tilde{n}_{\text{PRB}}(n_s) = \begin{cases} \tilde{n}'_{\text{PRB}} - N_{\text{row}} & , N_{\text{null}} \neq 0 \text{ and } \tilde{n}_{\text{VRB}} \geq \tilde{N}_{\text{VRB}}^{\text{DL}} - N_{\text{null}} \text{ and } \tilde{n}_{\text{VRB}} \bmod 2 = 1 \\ \tilde{n}'_{\text{PRB}} - N_{\text{row}} + N_{\text{null}} / 2 & , N_{\text{null}} \neq 0 \text{ and } \tilde{n}_{\text{VRB}} \geq \tilde{N}_{\text{VRB}}^{\text{DL}} - N_{\text{null}} \text{ and } \tilde{n}_{\text{VRB}} \bmod 2 = 0 \\ \tilde{n}''_{\text{PRB}} - N_{\text{null}} / 2 & , N_{\text{null}} \neq 0 \text{ and } \tilde{n}_{\text{VRB}} < \tilde{N}_{\text{VRB}}^{\text{DL}} - N_{\text{null}} \text{ and } \tilde{n}_{\text{VRB}} \bmod 4 \geq 2 \\ \tilde{n}_{\text{PRB}} & , \text{otherwise} \end{cases},$$

$$\text{where } \tilde{n}'_{\text{PRB}} = 2N_{\text{row}} \cdot (\tilde{n}_{\text{VRB}} \bmod 2) + \lfloor \tilde{n}_{\text{VRB}} / 2 \rfloor + \tilde{N}_{\text{VRB}}^{\text{DL}} \cdot \lfloor n_{\text{VRB}} / \tilde{N}_{\text{VRB}}^{\text{DL}} \rfloor,$$

$$\text{and } \tilde{n}''_{\text{PRB}} = N_{\text{row}} \cdot (\tilde{n}_{\text{VRB}} \bmod 4) + \lfloor \tilde{n}_{\text{VRB}} / 4 \rfloor + \tilde{N}_{\text{VRB}}^{\text{DL}} \cdot \lfloor n_{\text{VRB}} / \tilde{N}_{\text{VRB}}^{\text{DL}} \rfloor,$$

where  $\tilde{n}_{\text{VRB}} = n_{\text{VRB}} \bmod \tilde{N}_{\text{VRB}}^{\text{DL}}$  and  $n_{\text{VRB}}$  is obtained from the downlink scheduling assignment as described in TS 36.213 [4].

For odd slot number  $n_s$ ;

$$\tilde{n}_{\text{PRB}}(n_s) = (\tilde{n}_{\text{PRB}}(n_s - 1) + \tilde{N}_{\text{VRB}}^{\text{DL}} / 2) \bmod \tilde{N}_{\text{VRB}}^{\text{DL}} + \tilde{N}_{\text{VRB}}^{\text{DL}} \cdot \lfloor n_{\text{VRB}} / \tilde{N}_{\text{VRB}}^{\text{DL}} \rfloor$$

Then, for all  $n_s$ ;

$$n_{\text{PRB}}(n_s) = \begin{cases} \tilde{n}_{\text{PRB}}(n_s), & \tilde{n}_{\text{PRB}}(n_s) < \tilde{N}_{\text{VRB}}^{\text{DL}} / 2 \\ \tilde{n}_{\text{PRB}}(n_s) + N_{\text{gap}} - \tilde{N}_{\text{VRB}}^{\text{DL}} / 2, & \tilde{n}_{\text{PRB}}(n_s) \geq \tilde{N}_{\text{VRB}}^{\text{DL}} / 2 \end{cases}.$$

Virtual resource blocks of distributed type are not applicable to BL/CE UEs.

## 6.2.4 Resource-element groups (REGs)

Resource-element groups are used for defining the mapping of control channels to resource elements.

A resource-element group is represented by the index pair  $(k', l')$  of the resource element with the lowest index  $k$  in the group with all resource elements in the group having the same value of  $l$ . The set of resource elements  $(k, l)$  in a resource-element group depends on the number of cell-specific reference signals configured as described below with  $k_0 = n_{\text{PRB}} \cdot N_{\text{sc}}^{\text{RB}}$ ,  $0 \leq n_{\text{PRB}} < N_{\text{RB}}^{\text{DL}}$ .

- In the first OFDM symbol of the first slot in a subframe the two resource-element groups in physical resource block  $n_{\text{PRB}}$  consist of resource elements  $(k, l = 0)$  with  $k = k_0 + 0, k_0 + 1, \dots, k_0 + 5$  and  $k = k_0 + 6, k_0 + 7, \dots, k_0 + 11$ , respectively.
- In the second OFDM symbol of the first slot in a subframe in case of one or two cell-specific reference signals configured, the three resource-element groups in physical resource block  $n_{\text{PRB}}$  consist of resource elements  $(k, l = 1)$  with  $k = k_0 + 0, k_0 + 1, \dots, k_0 + 3$ ,  $k = k_0 + 4, k_0 + 5, \dots, k_0 + 7$  and  $k = k_0 + 8, k_0 + 9, \dots, k_0 + 11$ , respectively.
- In the second OFDM symbol of the first slot in a subframe in case of four cell-specific reference signals configured, the two resource-element groups in physical resource block  $n_{\text{PRB}}$  consist of resource elements

$(k, l = 1)$  with  $k = k_0 + 0, k_0 + 1, \dots, k_0 + 5$  and  $k = k_0 + 6, k_0 + 7, \dots, k_0 + 11$ , respectively.

- In the third OFDM symbol of the first slot in a subframe, the three resource-element groups in physical resource block  $n_{\text{PRB}}$  consist of resource elements  $(k, l = 2)$  with  $k = k_0 + 0, k_0 + 1, \dots, k_0 + 3$ ,  $k = k_0 + 4, k_0 + 5, \dots, k_0 + 7$  and  $k = k_0 + 8, k_0 + 9, \dots, k_0 + 11$ , respectively.
- In the fourth OFDM symbol of the first slot in a subframe in case of normal cyclic prefix, the three resource-element groups in physical resource block  $n_{\text{PRB}}$  consist of resource elements  $(k, l = 3)$  with  $k = k_0 + 0, k_0 + 1, \dots, k_0 + 3$ ,  $k = k_0 + 4, k_0 + 5, \dots, k_0 + 7$  and  $k = k_0 + 8, k_0 + 9, \dots, k_0 + 11$ , respectively.
- In the fourth OFDM symbol of the first slot in a subframe in case of extended cyclic prefix, the two resource-element groups in physical resource block  $n_{\text{PRB}}$  consist of resource elements  $(k, l = 3)$  with  $k = k_0 + 0, k_0 + 1, \dots, k_0 + 5$  and  $k = k_0 + 6, k_0 + 7, \dots, k_0 + 11$ , respectively.

Mapping of a symbol-quadruplet  $\langle z(i), z(i+1), z(i+2), z(i+3) \rangle$  onto a resource-element group represented by resource-element  $(k', l')$  is defined such that elements  $z(i)$  are mapped to resource elements  $(k, l)$  of the resource-element group not used for cell-specific reference signals in increasing order of  $i$  and  $k$ . In case a single cell-specific reference signal is configured, cell-specific reference signals shall be assumed to be present on antenna ports 0 and 1 for the purpose of mapping a symbol-quadruplet to a resource-element group, otherwise the number of cell-specific reference signals shall be assumed equal to the actual number of antenna ports used for cell-specific reference signals. The UE shall not make any assumptions about resource elements assumed to be reserved for reference signals but not used for transmission of a reference signal.

For frame structure type 3, if the higher layer parameter *subframeStartPosition* indicates 's07' and the downlink transmission starts in the second slot of a subframe, the above definition applies to the second slot of that subframe instead of the first slot.

## 6.2.4A Enhanced Resource-Element Groups (EREGs)

EREGs are used for defining the mapping of enhanced control channels to resource elements.

There are 16 EREGs, numbered from 0 to 15, per physical resource block pair. Number all resource elements, except resource elements carrying DM-RS for antenna ports  $p = \{107, 108, 109, 110\}$  for normal cyclic prefix or  $p = \{107, 108\}$  for extended cyclic prefix, in a physical resource-block pair cyclically from 0 to 15 in an increasing order of first frequency, then time. All resource elements with number  $i$  in that physical resource-block pair constitutes EREG number  $i$ .

For frame structure type 3, if the higher layer parameter *subframeStartPosition* indicates 's07' and the downlink transmission starts in the second slot of a subframe, the above definition applies to the second slot of that subframe instead of the first slot.

## 6.2.4B Short Resource-Element Groups (SREGs)

Short resource-element groups (SREGs) are used for defining the mapping of short control channels to resource elements.

One SREG is composed of all resource elements in a physical resource block in a given OFDM symbol. The set of resource elements  $(k, l)$  in an SREG in physical resource block  $n_{\text{PRB}}$  consist of resource elements with

$k = k_0 + 0, k_0 + 1, \dots, k_0 + 11$  with  $k_0 = n_{\text{PRB}} \cdot N_{\text{sc}}^{\text{RB}}$ ,  $0 \leq n_{\text{PRB}} < N_{\text{RB}}^{\text{DL}}$ , all having the same value of  $l$ .

## 6.2.5 Guard period for half-duplex FDD operation

For type A half-duplex FDD operation, a guard period is created by the UE by

- not receiving the last part of a downlink subframe immediately preceding an uplink subframe from the same UE.

For type B half-duplex FDD operation, guard periods, each referred to as a half-duplex guard subframe, are created by the UE by

- not receiving a downlink subframe immediately preceding an uplink subframe from the same UE, and
- not receiving a downlink subframe immediately following an uplink subframe from the same UE.

## 6.2.6 Guard Period for TDD Operation

For frame structure type 2, the GP field in Figure 4.2-1 serves as a guard period.

## 6.2.7 Narrowbands and widebands

A narrowband is defined as six non-overlapping consecutive physical resource blocks in the frequency domain. The total number of downlink narrowbands in the downlink transmission bandwidth configured in the cell is given by

$$N_{\text{NB}}^{\text{DL}} = \left\lfloor \frac{N_{\text{RB}}^{\text{DL}}}{6} \right\rfloor$$

The narrowbands are numbered  $n_{\text{NB}} = 0, \dots, N_{\text{NB}}^{\text{DL}} - 1$  in order of increasing physical resource-block number where narrowband  $n_{\text{NB}}$  is composed of physical resource-block indices

$$\begin{cases} 6n_{\text{NB}} + i_0 + i + \bar{i} & \text{if } N_{\text{RB}}^{\text{DL}} \bmod 2 = 0 \\ 6n_{\text{NB}} + i_0 + i + \bar{i} & \text{if } N_{\text{RB}}^{\text{DL}} \bmod 2 = 1 \text{ and } n_{\text{NB}} < N_{\text{NB}}^{\text{DL}}/2 \\ 6n_{\text{NB}} + i_0 + i + 1 + \bar{i} & \text{if } N_{\text{RB}}^{\text{DL}} \bmod 2 = 1 \text{ and } n_{\text{NB}} \geq N_{\text{NB}}^{\text{DL}}/2 \end{cases}$$

where

$$i = 0, 1, \dots, 5$$

$$i_0 = \left\lfloor \frac{N_{\text{RB}}^{\text{DL}}}{2} \right\rfloor - \frac{6N_{\text{NB}}^{\text{DL}}}{2}$$

and  $\bar{i}$  is according to Table 6.2.7-1 for the narrowbands used for PDSCH resource allocation in CEModeB if the higher-layer parameter *ce-PDSCH-FlexibleStartPRB-AllocConfig* is set, otherwise  $\bar{i} = 0$ .

If  $N_{\text{NB}}^{\text{DL}} \geq 4$ , a wideband is defined as four non-overlapping narrowbands in the frequency domain. The total number of downlink widebands in the downlink transmission bandwidth configured in the cell is given by

$$N_{\text{WB}}^{\text{DL}} = \left\lfloor \frac{N_{\text{NB}}^{\text{DL}}}{4} \right\rfloor$$

and the widebands are numbered  $n_{\text{WB}} = 0, \dots, N_{\text{WB}}^{\text{DL}} - 1$  in order of increasing narrowband number where wideband  $n_{\text{WB}}$  is composed of narrowband indices  $4n_{\text{WB}} + i$  where  $i = 0, 1, \dots, 3$ .

If  $N_{\text{NB}}^{\text{DL}} < 4$ , then  $N_{\text{WB}}^{\text{DL}} = 1$  and the single wideband is composed of the  $N_{\text{NB}}^{\text{DL}}$  non-overlapping narrowband(s).

**Table 6.2.7-1: Shift of narrowbands for PDSCH resource allocation in CEModeB when higher layer parameter *ce-PDSCH-FlexibleStartPRB-AllocConfig* is set.**

| System bandwidth $N_{\text{RB}}^{\text{DL}}$ | Shift of narrowband $\bar{i}$                                       |
|----------------------------------------------|---------------------------------------------------------------------|
| 6                                            | 0                                                                   |
| 15                                           | -1 for narrowband #0;<br>0 for narrowband #1                        |
| 25                                           | 0 for narrowbands 0, 1;<br>- 1 for narrowband 2, 3                  |
| 50                                           | - 1 for all narrowbands                                             |
| 75                                           | -1 for narrowbands 0, 1, ..., 5;<br>0 for narrowbands 6, 7, ..., 11 |
| 100                                          | -2 for all narrowbands.                                             |

## 6.2.8 Guard period for narrowband and wideband retuning

For BL/CE UEs, a guard period of at most  $N_{\text{symb}}^{\text{retune}}$  OFDM symbols is created for Rx-to-Rx and Tx-to-Rx frequency retuning between two consecutive subframes.

- If the higher layer parameter *ce-RetuningSymbols* is set, then  $N_{\text{symb}}^{\text{retune}}$  equals *ce-RetuningSymbols*, otherwise  $N_{\text{symb}}^{\text{retune}} = 2$ .
- If the higher layer parameter *ce-pdsch-maxBandwidth-config* is set to 5 MHz, then the rules for guard period creation defined in the remainder of this clause apply not for retuning between narrowbands but for retuning between widebands and for transmissions involving multiple widebands.
- If the UE is configured with CEModeA and higher layer parameter *ce-PDSCH-FlexibleStartPRB-AllocConfig*, the rules for guard period creation defined in the remainder of this clause apply for retuning between tuning narrowbands defined for the allocation resources not fully within one narrowband defined in Clause 6.2.7 as the consecutive 6PRBs starting from  $RB_{\text{start}}$  if  $RB_{\text{start}}$  is aligned with RBG boundary, or the consecutive 6PRBs ending at  $RB_{\text{start}} + L_{\text{CRBs}} - 1$  if  $RB_{\text{start}} + L_{\text{CRBs}} - 1$  is aligned with RBG boundary, where  $RB_{\text{start}}$  and  $L_{\text{CRBs}}$  are defined in Table 7.1.6.3-2 [4].
- If the UE is configured with CEModeB and higher layer parameter *ce-PDSCH-FlexibleStartPRB-AllocConfig*, the rules for guard period creation defined in the remainder of this clause apply for retuning between the tuning narrowband defined as the narrowband shifted according to Table 6.2.7-1.
- If the UE retunes from a first downlink narrowband to a second downlink narrowband with a different center frequency, a guard period is created by the UE not receiving at most  $N_{\text{symb}}^{\text{retune}}$  OFDM symbols in the second narrowband.
- If the UE retunes from a first uplink narrowband to a second downlink narrowband with a different center frequency for frame structure type 2, a guard period is created by the UE not receiving at most  $N_{\text{symb}}^{\text{retune}}$  OFDM symbols in the second narrowband.

Furthermore, for BL/CE UEs configured with the higher layer parameter *srs-UpPtsAdd*, a guard period of at most  $N_{\text{symb}}^{\text{retune}}$  OFDM or SC-FDMA symbols is created for Rx-to-Tx frequency retuning within a special subframe for frame structure type 2. Primarily, the TDD guard period (GP) specified in clause 4.2 serves as the guard period for narrowband retuning, and if GP is not sufficient then additional guard period is created by the UE according to:

- If SRS is configured to be transmitted in the first UpPTS symbol, the additional guard period is created by the UE not receiving at most  $N_{\text{symb}}^{\text{retune}}$  DwPTS symbols in the first narrowband.
- If SRS is configured to be transmitted in the second UpPTS symbol but not in the first UpPTS symbol, the additional guard period is created by the UE primarily by not transmitting the first UpPTS symbol and (if  $N_{\text{symb}}^{\text{retune}} = 2$ ) secondarily by not receiving the last DwPTS symbol.


## 6.3 General structure for downlink physical channels

This clause describes a general structure, applicable to more than one physical channel.

The baseband signal representing a downlink physical channel is defined in terms of the following steps:

- scrambling of coded bits in each of the codewords to be transmitted on a physical channel
- modulation of scrambled bits to generate complex-valued modulation symbols
- mapping of the complex-valued modulation symbols onto one or several transmission layers
- precoding of the complex-valued modulation symbols on each layer for transmission on the antenna ports
- mapping of complex-valued modulation symbols for each antenna port to resource elements

- generation of complex-valued time-domain OFDM signal for each antenna port

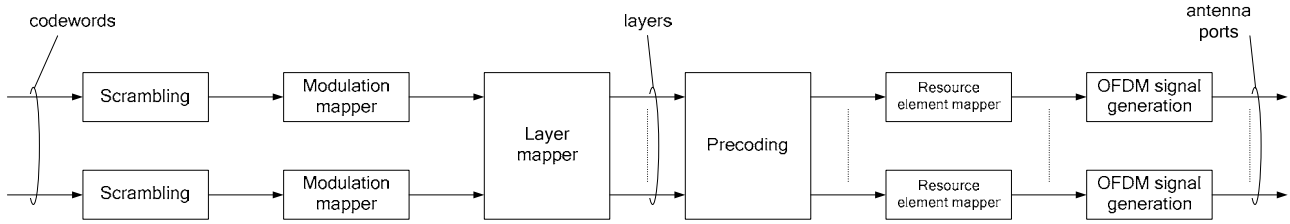

**Figure 6.3-1: Overview of physical channel processing**

### 6.3.1 Scrambling

For each codeword  $q$ , the block of bits  $b^{(q)}(0), \dots, b^{(q)}(M_{\text{bit}}^{(q)} - 1)$ , where  $M_{\text{bit}}^{(q)}$  is the number of bits in codeword  $q$  transmitted on the physical channel in one subframe/slot/subslot, shall be scrambled prior to modulation, resulting in a block of scrambled bits  $\tilde{b}^{(q)}(0), \dots, \tilde{b}^{(q)}(M_{\text{bit}}^{(q)} - 1)$  according to

$$\tilde{b}^{(q)}(i) = (b^{(q)}(i) + c^{(q)}(i)) \bmod 2$$

where the scrambling sequence  $c^{(q)}(i)$  is given by clause 7.2. The scrambling sequence generator shall be initialised at the start of each subframe, where the initialisation value of  $c_{\text{init}}$  depends on the transport channel type according to

$$c_{\text{init}} = \begin{cases} n_{\text{RNTI}} \cdot 2^{14} + q \cdot 2^{13} + \lfloor n_s/2 \rfloor \cdot 2^9 + N_{\text{ID}}^{\text{cell}} & \text{for PDSCH} \\ \lfloor n_s/2 \rfloor \cdot 2^9 + N_{\text{ID}}^{\text{MBSFN}} & \text{for PMCH} \end{cases}$$

where  $n_{\text{RNTI}}$  corresponds to the RNTI associated with the PDSCH transmission as described in clause 7.1 TS 36.213 [4].

For BL/CE UEs, the same scrambling sequence is applied per subframe to PDSCH for a given block of  $N_{\text{acc}}$  subframes. The subframe number of the first subframe in each block of  $N_{\text{acc}}$  consecutive subframes, denoted as  $n_{\text{abs},1}$ , satisfies  $(n_{\text{abs},1} + i_{\Delta}) \bmod N_{\text{acc}} = 0$ . For the  $j^{\text{th}}$  block of  $N_{\text{acc}}$  subframes, the scrambling sequence generator shall be initialised with

$$c_{\text{init}} = n_{\text{RNTI}} \cdot 2^{14} + q \cdot 2^{13} + [(j_0 + j)N_{\text{acc}} \bmod 10] \cdot 2^9 + N_{\text{ID}}^{\text{cell}}$$

where

$$\begin{aligned} j &= 0, 1, \dots, \left\lfloor \frac{i_0 + N_{\text{abs}}^{\text{PDSCH}} + i_{\Delta} - 1}{N_{\text{acc}}} \right\rfloor - j_0 \\ j_0 &= \lfloor (i_0 + i_{\Delta}) / N_{\text{acc}} \rfloor \\ i_{\Delta} &= \begin{cases} 0, & \text{for frame structure type 1 or } N_{\text{acc}} = 1 \\ N_{\text{acc}} - 2, & \text{for frame structure type 2 and } N_{\text{acc}} = 10 \end{cases} \end{aligned}$$

and  $i_0$  is the absolute subframe number of the first downlink subframe intended for PDSCH. The PDSCH transmission spans  $N_{\text{abs}}^{\text{PDSCH}}$  consecutive subframes including subframes that are not BL/CE DL subframes where the PDSCH transmission is postponed.

For BL/CE UEs,

- if the PDSCH is carrying SIB1-BR

- $N_{\text{acc}} = 1$
- else if the PDSCH is carrying SI message (except for SIB1-BR) or if the PDSCH transmission is associated with P-RNTI or SC-RNTI:
  - $N_{\text{acc}} = 4$  for frame structure type 1 and  $N_{\text{acc}} = 10$  for frame structure type 2
- otherwise
  - $N_{\text{acc}} = 1$  for UEs assuming CEModeA (according to the definition in Clause 12 of [4]) or configured with CEModeA
  - $N_{\text{acc}} = 4$  for frame structure type 1 and  $N_{\text{acc}} = 10$  for frame structure type 2 for UEs assuming CEModeB (according to the definition in Clause 12 of [4]) or configured with CEModeB

For PDSCH with a subframe duration, up to two codewords can be transmitted in one subframe, i.e.,  $q \in \{0,1\}$ . In the case of single codeword transmission,  $q$  is equal to zero.

## 6.3.2 Modulation

For each codeword  $q$ , the block of scrambled bits  $\tilde{b}^{(q)}(0), \dots, \tilde{b}^{(q)}(M_{\text{bit}}^{(q)} - 1)$  shall be modulated as described in clause 7.1 using one of the modulation schemes in Table 6.3.2-1, resulting in a block of complex-valued modulation symbols  $d^{(q)}(0), \dots, d^{(q)}(M_{\text{symp}}^{(q)} - 1)$ .

**Table 6.3.2-1: Modulation schemes**

| Physical channel | Modulation schemes                  |
|------------------|-------------------------------------|
| PDSCH            | QPSK, 16QAM, 64QAM, 256QAM, 1024QAM |
| PMCH             | QPSK, 16QAM, 64QAM, 256QAM          |

## 6.3.3 Layer mapping

The complex-valued modulation symbols for each of the codewords to be transmitted are mapped onto one or several layers. Complex-valued modulation symbols  $d^{(q)}(0), \dots, d^{(q)}(M_{\text{symp}}^{(q)} - 1)$  for codeword  $q$  shall be mapped onto the layers  $x(i) = [x^{(0)}(i) \ \dots \ x^{(v-1)}(i)]^T$ ,  $i = 0, 1, \dots, M_{\text{symp}}^{\text{layer}} - 1$  where  $v$  is the number of layers and  $M_{\text{symp}}^{\text{layer}}$  is the number of modulation symbols per layer, unless  $v = 2$  and "MUST interference presence and power ratio (*MUSTIdx*)" signalled in the associated DCI is '00' for only one codeword in which case  $x(i) = [\alpha^{(0)} x^{(0)}(i) \ \alpha^{(1)} x^{(1)}(i)]^T$ , where  $\alpha^{(j)} = \sqrt{\frac{2(1-\beta)}{2-\beta}}$  for the layer  $j$  for which *MUSTIdx* is '00', and  $\alpha^{(j)} = \sqrt{\frac{2}{2-\beta}}$  for the layer  $j$  for which *MUSTIdx* is not '00'. The value of  $\beta$  is determined from Table 6.3.3-1 using *MUSTIdx* and the modulation order of the codeword for which *MUSTIdx* is not '00'.

**Table 6.3.3-1: Values for  $\beta$**

| <i>MUSTIdx</i> | <i>Modulation order</i> |           |         |
|----------------|-------------------------|-----------|---------|
|                | QPSK                    | 16QAM     | 64QAM   |
| 01             | 8/10                    | 32/42     | 128/170 |
| 10             | 50/58                   | 144.5/167 | 40.5/51 |
| 11             | 264.5/289               | 128/138   | 288/330 |

### 6.3.3.1 Layer mapping for transmission on a single antenna port

For transmission on a single antenna port, a single layer is used,  $v = 1$ , and the mapping is defined by

$$x^{(0)}(i) = d^{(0)}(i)$$

with  $M_{\text{symb}}^{\text{layer}} = M_{\text{symb}}^{(0)}$ .

### 6.3.3.2 Layer mapping for spatial multiplexing

For spatial multiplexing, the layer mapping shall be done according to Table 6.3.3.2-1. The number of layers  $\nu$  is less than or equal to the number of antenna ports  $P$  used for transmission of the physical channel. The case of a single codeword mapped to multiple layers is only applicable when the number of cell-specific reference signals is four or when the number of UE-specific reference signals is two or larger. For subslot/slot-PDSCH, the number of codewords is always one.

**Table 6.3.3.2-1: Codeword-to-layer mapping for spatial multiplexing**

| Number of layers | Number of codewords | Codeword-to-layer mapping<br>$i = 0, 1, \dots, M_{\text{symb}}^{\text{layer}} - 1$                                                                                                                                                                                                |
|------------------|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                | 1                   | $x^{(0)}(i) = d^{(0)}(i)$ $M_{\text{symb}}^{\text{layer}} = M_{\text{symb}}^{(0)}$                                                                                                                                                                                                |
| 2                | 1                   | $x^{(0)}(i) = d^{(0)}(2i)$<br>$x^{(1)}(i) = d^{(0)}(2i+1)$ $M_{\text{symb}}^{\text{layer}} = M_{\text{symb}}^{(0)} / 2$                                                                                                                                                           |
| 2                | 2                   | $x^{(0)}(i) = d^{(0)}(i)$<br>$x^{(1)}(i) = d^{(1)}(i)$ $M_{\text{symb}}^{\text{layer}} = M_{\text{symb}}^{(0)} = M_{\text{symb}}^{(1)}$                                                                                                                                           |
| 3                | 1                   | $x^{(0)}(i) = d^{(0)}(3i)$<br>$x^{(1)}(i) = d^{(0)}(3i+1)$<br>$x^{(2)}(i) = d^{(0)}(3i+2)$ $M_{\text{symb}}^{\text{layer}} = M_{\text{symb}}^{(0)} / 3$                                                                                                                           |
| 3                | 2                   | $x^{(0)}(i) = d^{(0)}(i)$<br>$x^{(1)}(i) = d^{(1)}(2i)$<br>$x^{(2)}(i) = d^{(1)}(2i+1)$ $M_{\text{symb}}^{\text{layer}} = M_{\text{symb}}^{(0)} = M_{\text{symb}}^{(1)} / 2$                                                                                                      |
| 4                | 1                   | $x^{(0)}(i) = d^{(0)}(4i)$<br>$x^{(1)}(i) = d^{(0)}(4i+1)$<br>$x^{(2)}(i) = d^{(0)}(4i+2)$<br>$x^{(3)}(i) = d^{(0)}(4i+3)$ $M_{\text{symb}}^{\text{layer}} = M_{\text{symb}}^{(0)} / 4$                                                                                           |
| 4                | 2                   | $x^{(0)}(i) = d^{(0)}(2i)$<br>$x^{(1)}(i) = d^{(0)}(2i+1)$<br>$x^{(2)}(i) = d^{(1)}(2i)$<br>$x^{(3)}(i) = d^{(1)}(2i+1)$ $M_{\text{symb}}^{\text{layer}} = M_{\text{symb}}^{(0)} / 2 = M_{\text{symb}}^{(1)} / 2$                                                                 |
| 5                | 2                   | $x^{(0)}(i) = d^{(0)}(2i)$<br>$x^{(1)}(i) = d^{(0)}(2i+1)$<br>$x^{(2)}(i) = d^{(1)}(3i)$<br>$x^{(3)}(i) = d^{(1)}(3i+1)$<br>$x^{(4)}(i) = d^{(1)}(3i+2)$ $M_{\text{symb}}^{\text{layer}} = M_{\text{symb}}^{(0)} / 2 = M_{\text{symb}}^{(1)} / 3$                                 |
| 6                | 2                   | $x^{(0)}(i) = d^{(0)}(3i)$<br>$x^{(1)}(i) = d^{(0)}(3i+1)$<br>$x^{(2)}(i) = d^{(0)}(3i+2)$<br>$x^{(3)}(i) = d^{(1)}(3i)$<br>$x^{(4)}(i) = d^{(1)}(3i+1)$<br>$x^{(5)}(i) = d^{(1)}(3i+2)$ $M_{\text{symb}}^{\text{layer}} = M_{\text{symb}}^{(0)} / 3 = M_{\text{symb}}^{(1)} / 3$ |

|   |   |                                                                                                                                                                                                                                                          |                                                                                          |
|---|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| 7 | 2 | $x^{(0)}(i) = d^{(0)}(3i)$<br>$x^{(1)}(i) = d^{(0)}(3i+1)$<br>$x^{(2)}(i) = d^{(0)}(3i+2)$<br>$x^{(3)}(i) = d^{(1)}(4i)$<br>$x^{(4)}(i) = d^{(1)}(4i+1)$<br>$x^{(5)}(i) = d^{(1)}(4i+2)$<br>$x^{(6)}(i) = d^{(1)}(4i+3)$                                 | $M_{\text{symp}}^{\text{layer}} = M_{\text{symp}}^{(0)} / 3 = M_{\text{symp}}^{(1)} / 4$ |
| 8 | 2 | $x^{(0)}(i) = d^{(0)}(4i)$<br>$x^{(1)}(i) = d^{(0)}(4i+1)$<br>$x^{(2)}(i) = d^{(0)}(4i+2)$<br>$x^{(3)}(i) = d^{(0)}(4i+3)$<br>$x^{(4)}(i) = d^{(1)}(4i)$<br>$x^{(5)}(i) = d^{(1)}(4i+1)$<br>$x^{(6)}(i) = d^{(1)}(4i+2)$<br>$x^{(7)}(i) = d^{(1)}(4i+3)$ | $M_{\text{symp}}^{\text{layer}} = M_{\text{symp}}^{(0)} / 4 = M_{\text{symp}}^{(1)} / 4$ |

### 6.3.3.3 Layer mapping for transmit diversity

For transmit diversity, the layer mapping shall be done according to Table 6.3.3.3-1. There is only one codeword and the number of layers  $\nu$  is equal to the number of antenna ports  $P$  used for transmission of the physical channel.

**Table 6.3.3.3-1: Codeword-to-layer mapping for transmit diversity**

| Number of layers | Number of codewords | Codeword-to-layer mapping                                                                                                  |                                                                                                                                                                                                                                                                                                                                                    |
|------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                  |                     | $i = 0, 1, \dots, M_{\text{symp}}^{\text{layer}} - 1$                                                                      |                                                                                                                                                                                                                                                                                                                                                    |
| 2                | 1                   | $x^{(0)}(i) = d^{(0)}(2i)$<br>$x^{(1)}(i) = d^{(0)}(2i+1)$                                                                 | $M_{\text{symp}}^{\text{layer}} = M_{\text{symp}}^{(0)} / 2$                                                                                                                                                                                                                                                                                       |
| 4                | 1                   | $x^{(0)}(i) = d^{(0)}(4i)$<br>$x^{(1)}(i) = d^{(0)}(4i+1)$<br>$x^{(2)}(i) = d^{(0)}(4i+2)$<br>$x^{(3)}(i) = d^{(0)}(4i+3)$ | $M_{\text{symp}}^{\text{layer}} = \begin{cases} M_{\text{symp}}^{(0)} / 4 & \text{if } M_{\text{symp}}^{(0)} \bmod 4 = 0 \\ (M_{\text{symp}}^{(0)} + 2) / 4 & \text{if } M_{\text{symp}}^{(0)} \bmod 4 \neq 0 \end{cases}$<br>If $M_{\text{symp}}^{(0)} \bmod 4 \neq 0$ two null symbols shall be appended to $d^{(0)}(M_{\text{symp}}^{(0)} - 1)$ |

## 6.3.4 Precoding

The precoder takes as input a block of vectors  $x(i) = [x^{(0)}(i) \ \dots \ x^{(\nu-1)}(i)]^T$ ,  $i = 0, 1, \dots, M_{\text{symp}}^{\text{layer}} - 1$  from the layer mapping and generates a block of vectors  $y(i) = [\dots \ y^{(p)}(i) \ \dots]^T$ ,  $i = 0, 1, \dots, M_{\text{symp}}^{\text{ap}} - 1$  to be mapped onto resources on each of the antenna ports, where  $y^{(p)}(i)$  represents the signal for antenna port  $p$ .

### 6.3.4.1 Precoding for transmission on a single antenna port

For transmission on a single antenna port, precoding is defined by

$$y^{(p)}(i) = x^{(0)}(i)$$

where  $p \in \{0, 4, 5, 7, 8, 11, 13, 107, 108, 109, 110\}$  is the number of the single antenna port used for transmission of the

physical channel and  $i = 0, 1, \dots, M_{\text{symb}}^{\text{ap}} - 1$ ,  $M_{\text{symb}}^{\text{ap}} = M_{\text{symb}}^{\text{layer}}$ .

### 6.3.4.2 Precoding for spatial multiplexing using antenna ports with cell-specific reference signals

Precoding for spatial multiplexing using antenna ports with cell-specific reference signals is only used in combination with layer mapping for spatial multiplexing as described in clause 6.3.3.2. Spatial multiplexing supports two or four antenna ports and the set of antenna ports used is  $p \in \{0, 1\}$  or  $p \in \{0, 1, 2, 3\}$ , respectively.

#### 6.3.4.2.1 Precoding without CDD

Without Cyclic Delay Diversity (CDD), precoding for spatial multiplexing is defined by

$$\begin{bmatrix} y^{(0)}(i) \\ \vdots \\ y^{(P-1)}(i) \end{bmatrix} = W(i) \begin{bmatrix} x^{(0)}(i) \\ \vdots \\ x^{(v-1)}(i) \end{bmatrix}$$

where the precoding matrix  $W(i)$  is of size  $P \times v$  and  $i = 0, 1, \dots, M_{\text{symb}}^{\text{ap}} - 1$ ,  $M_{\text{symb}}^{\text{ap}} = M_{\text{symb}}^{\text{layer}}$ .

For spatial multiplexing, the values of  $W(i)$  shall be selected among the precoder elements in the codebook configured in the eNodeB and the UE. The eNodeB can further confine the precoder selection in the UE to a subset of the elements in the codebook using codebook subset restrictions. The configured codebook shall be selected from Table 6.3.4.2.3-1 or 6.3.4.2.3-2.

#### 6.3.4.2.2 Precoding for large delay CDD

For large-delay CDD, precoding for spatial multiplexing is defined by

$$\begin{bmatrix} y^{(0)}(i) \\ \vdots \\ y^{(P-1)}(i) \end{bmatrix} = W(i) D(i) U \begin{bmatrix} x^{(0)}(i) \\ \vdots \\ x^{(v-1)}(i) \end{bmatrix}$$

where the precoding matrix  $W(i)$  is of size  $P \times v$  and  $i = 0, 1, \dots, M_{\text{symb}}^{\text{ap}} - 1$ ,  $M_{\text{symb}}^{\text{ap}} = M_{\text{symb}}^{\text{layer}}$ . The diagonal size-  $v \times v$  matrix  $D(i)$  supporting cyclic delay diversity and the size-  $v \times v$  matrix  $U$  are both given by Table 6.3.4.2.2-1 for different numbers of layers  $v$ .

The values of the precoding matrix  $W(i)$  shall be selected among the precoder elements in the codebook configured in the eNodeB and the UE. The eNodeB can further confine the precoder selection in the UE to a subset of the elements in the codebook using codebook subset restriction. The configured codebook shall be selected from Table 6.3.4.2.3-1 or 6.3.4.2.3-2.

For 2 antenna ports, the precoder is selected according to  $W(i) = C_1$  where  $C_1$  denotes the precoding matrix corresponding to precoder index 0 in Table 6.3.4.2.3-1.

For 4 antenna ports, the UE may assume that the eNodeB cyclically assigns different precoders to different vectors  $[x^{(0)}(i) \dots x^{(v-1)}(i)]^T$  on the physical downlink shared channel as follows. A different precoder is used every  $v$  vectors, where  $v$  denotes the number of transmission layers in the case of spatial multiplexing. In particular, the

precoder is selected according to  $W(i) = C_k$ , where  $k$  is the precoder index given by  $k = \left( \left\lfloor \frac{i}{v} \right\rfloor \bmod 4 \right) + 1 \in \{1, 2, 3, 4\}$

and  $C_1, C_2, C_3, C_4$  denote precoder matrices corresponding to precoder indices 12, 13, 14 and 15, respectively, in Table 6.3.4.2.3-2.

**Table 6.3.4.2.2-1: Large-delay cyclic delay diversity**

| Number of layers $\nu$ | $U$                                                                                                                                                                                                                | $D(i)$                                                                                                                            |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| 2                      | $\frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 1 \\ 1 & e^{-j2\pi/2} \end{bmatrix}$                                                                                                                                       | $\begin{bmatrix} 1 & 0 \\ 0 & e^{-j2\pi/2} \end{bmatrix}$                                                                         |
| 3                      | $\frac{1}{\sqrt{3}} \begin{bmatrix} 1 & 1 & 1 \\ 1 & e^{-j2\pi/3} & e^{-j4\pi/3} \\ 1 & e^{-j4\pi/3} & e^{-j8\pi/3} \end{bmatrix}$                                                                                 | $\begin{bmatrix} 1 & 0 & 0 \\ 0 & e^{-j2\pi/3} & 0 \\ 0 & 0 & e^{-j4\pi/3} \end{bmatrix}$                                         |
| 4                      | $\frac{1}{2} \begin{bmatrix} 1 & 1 & 1 & 1 \\ 1 & e^{-j2\pi/4} & e^{-j4\pi/4} & e^{-j6\pi/4} \\ 1 & e^{-j4\pi/4} & e^{-j8\pi/4} & e^{-j12\pi/4} \\ 1 & e^{-j6\pi/4} & e^{-j12\pi/4} & e^{-j18\pi/4} \end{bmatrix}$ | $\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & e^{-j2\pi/4} & 0 & 0 \\ 0 & 0 & e^{-j4\pi/4} & 0 \\ 0 & 0 & 0 & e^{-j6\pi/4} \end{bmatrix}$ |

### 6.3.4.2.3 Codebook for precoding and CSI reporting

For transmission on two antenna ports,  $p \in \{0,1\}$ , and for the purpose of CSI reporting based on two antenna ports  $p \in \{0,1\}$  or  $p \in \{15,16\}$ , the precoding matrix  $W(i)$  shall be selected from Table 6.3.4.2.3-1 or a subset thereof. For the closed-loop spatial multiplexing transmission mode defined in TS 36.213 [4], the codebook index 0 is not used when the number of layers is  $\nu = 2$ .

**Table 6.3.4.2.3-1: Codebook for transmission on antenna ports  $\{0,1\}$  and for CSI reporting based on antenna ports  $\{0,1\}$  or  $\{15,16\}$** 

| Codebook index | Number of layers $\nu$                                     |                                                                   |
|----------------|------------------------------------------------------------|-------------------------------------------------------------------|
|                | 1                                                          | 2                                                                 |
| 0              | $\frac{1}{\sqrt{2}} \begin{bmatrix} 1 \\ 1 \end{bmatrix}$  | $\frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix}$ |
| 1              | $\frac{1}{\sqrt{2}} \begin{bmatrix} 1 \\ -1 \end{bmatrix}$ | $\frac{1}{2} \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix}$       |
| 2              | $\frac{1}{\sqrt{2}} \begin{bmatrix} 1 \\ j \end{bmatrix}$  | $\frac{1}{2} \begin{bmatrix} 1 & 1 \\ j & -j \end{bmatrix}$       |
| 3              | $\frac{1}{\sqrt{2}} \begin{bmatrix} 1 \\ -j \end{bmatrix}$ | -                                                                 |

For transmission on four antenna ports,  $p \in \{0,1,2,3\}$ , the precoding matrix  $W$  shall be selected from Table 6.3.4.2.3-2 or a subset thereof. For the purpose of CSI reporting based on four antenna ports  $p \in \{0,1,2,3\}$  or  $p \in \{15,16,17,18\}$ , the precoding matrix  $W$  shall be selected from Table 6.3.4.2.3-2 or a subset thereof except for *alternativeCodeBookEnabledFor4TX-r12* = *TRUE* in which case the precoding matrix  $W$  shall be selected from Tables 7.2.4-0A, 7.2.4-0B, 7.2.4-0C, 7.2.4-0D in [4] or a subset thereof, and except for *advancedCodebookEnabled* = *TRUE* in which case the precoding matrix  $W$  shall be selected from Table 7.2.4-17C in [4] or a subset thereof. The quantity  $W_n^{\{s\}}$  denotes the matrix defined by the columns given by the set  $\{s\}$  from the expression  $W_n = I - 2u_n u_n^H / u_n^H u_n$  where  $I$  is the  $4 \times 4$  identity matrix and the vector  $u_n$  is given by Table 6.3.4.2.3-2.

**Table 6.3.4.2.3-2: Codebook for transmission on antenna ports  $\{0,1,2,3\}$  and for CSI reporting based on antenna ports  $\{0,1,2,3\}$  or  $\{15,16,17,18\}$** 

| Codebook index | $u_n$                        | Number of layers $\nu$ |                           |                            |                      |
|----------------|------------------------------|------------------------|---------------------------|----------------------------|----------------------|
|                |                              | 1                      | 2                         | 3                          | 4                    |
| 0              | $u_0 = [1 \ -1 \ -1 \ -1]^T$ | $W_0^{\{1\}}$          | $W_0^{\{14\}} / \sqrt{2}$ | $W_0^{\{124\}} / \sqrt{3}$ | $W_0^{\{1234\}} / 2$ |

|    |                                                                   |                  |                            |                             |                       |
|----|-------------------------------------------------------------------|------------------|----------------------------|-----------------------------|-----------------------|
| 1  | $u_1 = [1 \quad -j \quad 1 \quad j]^T$                            | $W_1^{\{1\}}$    | $W_1^{\{12\}}/\sqrt{2}$    | $W_1^{\{123\}}/\sqrt{3}$    | $W_1^{\{1234\}}/2$    |
| 2  | $u_2 = [1 \quad 1 \quad -1 \quad 1]^T$                            | $W_2^{\{1\}}$    | $W_2^{\{12\}}/\sqrt{2}$    | $W_2^{\{123\}}/\sqrt{3}$    | $W_2^{\{3214\}}/2$    |
| 3  | $u_3 = [1 \quad j \quad 1 \quad -j]^T$                            | $W_3^{\{1\}}$    | $W_3^{\{12\}}/\sqrt{2}$    | $W_3^{\{123\}}/\sqrt{3}$    | $W_3^{\{3214\}}/2$    |
| 4  | $u_4 = [1 \quad (-1-j)/\sqrt{2} \quad -j \quad (1-j)/\sqrt{2}]^T$ | $W_4^{\{1\}}$    | $W_4^{\{14\}}/\sqrt{2}$    | $W_4^{\{124\}}/\sqrt{3}$    | $W_4^{\{1234\}}/2$    |
| 5  | $u_5 = [1 \quad (1-j)/\sqrt{2} \quad j \quad (-1-j)/\sqrt{2}]^T$  | $W_5^{\{1\}}$    | $W_5^{\{14\}}/\sqrt{2}$    | $W_5^{\{124\}}/\sqrt{3}$    | $W_5^{\{1234\}}/2$    |
| 6  | $u_6 = [1 \quad (1+j)/\sqrt{2} \quad -j \quad (-1+j)/\sqrt{2}]^T$ | $W_6^{\{1\}}$    | $W_6^{\{13\}}/\sqrt{2}$    | $W_6^{\{134\}}/\sqrt{3}$    | $W_6^{\{1324\}}/2$    |
| 7  | $u_7 = [1 \quad (-1+j)/\sqrt{2} \quad j \quad (1+j)/\sqrt{2}]^T$  | $W_7^{\{1\}}$    | $W_7^{\{13\}}/\sqrt{2}$    | $W_7^{\{134\}}/\sqrt{3}$    | $W_7^{\{1324\}}/2$    |
| 8  | $u_8 = [1 \quad -1 \quad 1 \quad 1]^T$                            | $W_8^{\{1\}}$    | $W_8^{\{12\}}/\sqrt{2}$    | $W_8^{\{124\}}/\sqrt{3}$    | $W_8^{\{1234\}}/2$    |
| 9  | $u_9 = [1 \quad -j \quad -1 \quad -j]^T$                          | $W_9^{\{1\}}$    | $W_9^{\{14\}}/\sqrt{2}$    | $W_9^{\{134\}}/\sqrt{3}$    | $W_9^{\{1234\}}/2$    |
| 10 | $u_{10} = [1 \quad 1 \quad 1 \quad -1]^T$                         | $W_{10}^{\{1\}}$ | $W_{10}^{\{13\}}/\sqrt{2}$ | $W_{10}^{\{123\}}/\sqrt{3}$ | $W_{10}^{\{1324\}}/2$ |
| 11 | $u_{11} = [1 \quad j \quad -1 \quad j]^T$                         | $W_{11}^{\{1\}}$ | $W_{11}^{\{13\}}/\sqrt{2}$ | $W_{11}^{\{134\}}/\sqrt{3}$ | $W_{11}^{\{1324\}}/2$ |
| 12 | $u_{12} = [1 \quad -1 \quad -1 \quad 1]^T$                        | $W_{12}^{\{1\}}$ | $W_{12}^{\{12\}}/\sqrt{2}$ | $W_{12}^{\{123\}}/\sqrt{3}$ | $W_{12}^{\{1234\}}/2$ |
| 13 | $u_{13} = [1 \quad -1 \quad 1 \quad -1]^T$                        | $W_{13}^{\{1\}}$ | $W_{13}^{\{13\}}/\sqrt{2}$ | $W_{13}^{\{123\}}/\sqrt{3}$ | $W_{13}^{\{1324\}}/2$ |
| 14 | $u_{14} = [1 \quad 1 \quad -1 \quad -1]^T$                        | $W_{14}^{\{1\}}$ | $W_{14}^{\{13\}}/\sqrt{2}$ | $W_{14}^{\{123\}}/\sqrt{3}$ | $W_{14}^{\{3214\}}/2$ |
| 15 | $u_{15} = [1 \quad 1 \quad 1 \quad 1]^T$                          | $W_{15}^{\{1\}}$ | $W_{15}^{\{12\}}/\sqrt{2}$ | $W_{15}^{\{123\}}/\sqrt{3}$ | $W_{15}^{\{1234\}}/2$ |

For the purpose of CSI reporting for 8, 12, 16, 20, 24, 28, and 32 CSI reference signals the codebooks are given in clause 7.2.4 of TS 36.213 [4].

### 6.3.4.3 Precoding for transmit diversity

Precoding for transmit diversity is only used in combination with layer mapping for transmit diversity as described in clause 6.3.3.3. The precoding operation for transmit diversity is defined for two and four antenna ports.

For transmission on two antenna ports,  $p \in \{0,1\}$ , the output  $y(i) = [y^{(0)}(i) \quad y^{(1)}(i)]^T$ ,  $i = 0,1,\dots,M_{\text{symb}}^{\text{ap}} - 1$  of the precoding operation is defined by

$$\begin{bmatrix} y^{(0)}(2i) \\ y^{(1)}(2i) \\ y^{(0)}(2i+1) \\ y^{(1)}(2i+1) \end{bmatrix} = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 0 & j & 0 \\ 0 & -1 & 0 & j \\ 0 & 1 & 0 & j \\ 1 & 0 & -j & 0 \end{bmatrix} \begin{bmatrix} \text{Re}(x^{(0)}(i)) \\ \text{Re}(x^{(1)}(i)) \\ \text{Im}(x^{(0)}(i)) \\ \text{Im}(x^{(1)}(i)) \end{bmatrix}$$

for  $i = 0,1,\dots,M_{\text{symb}}^{\text{layer}} - 1$  with  $M_{\text{symb}}^{\text{ap}} = 2M_{\text{symb}}^{\text{layer}}$ .

For rank=1 transmission on two antenna ports,  $p \in \{7,8\}$ , the output  $y(i) = [y^{(7)}(i) \quad y^{(8)}(i)]^T$ ,  $i = 0,1,\dots,M_{\text{symb}}^{\text{ap}} - 1$  of the precoding operation is defined by

$$\begin{bmatrix} y^{(\bar{p})}(2i) \\ y^{(\bar{p}+1)}(2i) \\ y^{(\bar{p})}(2i+1) \\ y^{(\bar{p}+1)}(2i+1) \end{bmatrix} = \begin{bmatrix} 1 & j & 0 & 0 \\ 0 & 0 & -1 & j \\ 0 & 0 & 1 & j \\ 1 & -j & 0 & 0 \end{bmatrix} \begin{bmatrix} \text{Re}(x^{(0)}(i)) \\ \text{Im}(x^{(0)}(i)) \\ \text{Re}(x^{(1)}(i)) \\ \text{Im}(x^{(1)}(i)) \end{bmatrix}$$

where  $\bar{p} = 7$ .

For transmission on four antenna ports,  $p \in \{0,1,2,3\}$ , the output  $y(i) = [y^{(0)}(i) \quad y^{(1)}(i) \quad y^{(2)}(i) \quad y^{(3)}(i)]^T$ ,

$i = 0, 1, \dots, M_{\text{symb}}^{\text{ap}} - 1$  of the precoding operation is defined by

$$\begin{bmatrix} y^{(0)}(4i) \\ y^{(1)}(4i) \\ y^{(2)}(4i) \\ y^{(3)}(4i) \\ y^{(0)}(4i+1) \\ y^{(1)}(4i+1) \\ y^{(2)}(4i+1) \\ y^{(3)}(4i+1) \\ y^{(0)}(4i+2) \\ y^{(1)}(4i+2) \\ y^{(2)}(4i+2) \\ y^{(3)}(4i+2) \\ y^{(0)}(4i+3) \\ y^{(1)}(4i+3) \\ y^{(2)}(4i+3) \\ y^{(3)}(4i+3) \end{bmatrix} = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 0 & 0 & 0 & j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & -j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & j & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & -1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & -j & 0 \end{bmatrix} \begin{bmatrix} \text{Re}\{x^{(0)}(i)\} \\ \text{Re}\{x^{(1)}(i)\} \\ \text{Re}\{x^{(2)}(i)\} \\ \text{Re}\{x^{(3)}(i)\} \\ \text{Im}\{x^{(0)}(i)\} \\ \text{Im}\{x^{(1)}(i)\} \\ \text{Im}\{x^{(2)}(i)\} \\ \text{Im}\{x^{(3)}(i)\} \end{bmatrix}$$

for  $i = 0, 1, \dots, M_{\text{symb}}^{\text{layer}} - 1$  with  $M_{\text{symb}}^{\text{ap}} = \begin{cases} 4M_{\text{symb}}^{\text{layer}} & \text{if } M_{\text{symb}}^{(0)} \bmod 4 = 0 \\ (4M_{\text{symb}}^{\text{layer}}) - 2 & \text{if } M_{\text{symb}}^{(0)} \bmod 4 \neq 0 \end{cases}$ .

#### 6.3.4.4 Precoding for spatial multiplexing using antenna ports with UE-specific reference signals

Precoding for spatial multiplexing using antenna ports with UE-specific reference signals is only used in combination with layer mapping for spatial multiplexing as described in clause 6.3.3.2. Spatial multiplexing using antenna ports with UE-specific reference signals supports up to eight antenna ports.

If the higher-layer parameter *dmrs-tableAlt* is set to TRUE and the set of antenna ports  $p = \{11, 13\}$  is used for two layers transmission, the precoding operation for transmission on the two antenna ports is defined by

$$\begin{bmatrix} y^{(11)}(i) \\ y^{(13)}(i) \end{bmatrix} = \begin{bmatrix} x^{(0)}(i) \\ x^{(1)}(i) \end{bmatrix}$$

where  $i = 0, 1, \dots, M_{\text{symb}}^{\text{ap}} - 1$ ,  $M_{\text{symb}}^{\text{ap}} = M_{\text{symb}}^{\text{layer}}$ .

If the higher-layer parameter *semiOpenLoop* is set to TRUE for subframe PDSCH or the higher-layer parameter *semiOpenLoop-STTI* is set to TRUE for slot/subslot PDSCH and the set of antenna ports  $p = 7, 8$  is used for rank=2 transmission, the precoding operation for transmission on the two antenna ports is defined by

$$\begin{bmatrix} y^{(\bar{p})}(i) \\ y^{(\bar{p}+1)}(i) \end{bmatrix} = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & j & 1 & j \\ e^{j\theta_n} & je^{j\theta_n} & -e^{j\theta_n} & -je^{j\theta_n} \end{bmatrix} \begin{bmatrix} \text{Re}\{x^{(0)}(i)\} \\ \text{Im}\{x^{(0)}(i)\} \\ \text{Re}\{x^{(1)}(i)\} \\ \text{Im}\{x^{(1)}(i)\} \end{bmatrix}$$

where  $\bar{p} = 7$  and  $\theta_n = \pi(i \bmod 2)/2$ .

If the number of codewords is two and the DCI associated with the scheduled PDSCH is of Format 2D and the 'PDSCH RE Mapping and Quasi-Co-Location indicator' field in the DCI indicates a higher-layer configured PDSCH-RE-MappingQCL containing two sets of parameters, the precoding operation for transmission on  $\nu$  antenna ports is defined by

$$\begin{bmatrix} y^{(p_0)}(i) \\ \vdots \\ y^{(p_{v-1})}(i) \end{bmatrix} = \begin{bmatrix} x^{(0)}(i) \\ \vdots \\ x^{(v-1)}(i) \end{bmatrix}$$

where  $i = 0, 1, \dots, M_{\text{symb}}^{\text{ap}} - 1$ ,  $M_{\text{symb}}^{\text{ap}} = M_{\text{symb}}^{\text{layer}}$  and set of antenna ports  $p_j$  used is given by Table 6.3.4.4-1.

**Table 6.3.4.4-1: Layer-to-port mapping for two-codeword transmission when PDSCH-RE-MappingQCL contains two sets of parameters**

| Number of layers $v$ | Layer-to-port mapping $[p_0 \ \dots \ p_{v-1}]$ |
|----------------------|-------------------------------------------------|
| 2                    | [7 8]                                           |
| 3                    | [7 9 10]                                        |
| 4                    | [7 8 9 10]                                      |
| 5                    | [7 8 9 10 12]                                   |
| 6                    | [7 8 11 9 10 12]                                |
| 7                    | [7 8 11 9 10 12 14]                             |
| 8                    | [7 8 11 13 9 10 12 14]                          |

Otherwise, the set of antenna ports used is  $p = 7, 8, \dots, v+6$  and the precoding operation for transmission on  $v$  antenna ports is defined by

$$\begin{bmatrix} y^{(7)}(i) \\ y^{(8)}(i) \\ \vdots \\ y^{(6+v)}(i) \end{bmatrix} = \begin{bmatrix} x^{(0)}(i) \\ x^{(1)}(i) \\ \vdots \\ x^{(v-1)}(i) \end{bmatrix}$$

where  $i = 0, 1, \dots, M_{\text{symb}}^{\text{ap}} - 1$ ,  $M_{\text{symb}}^{\text{ap}} = M_{\text{symb}}^{\text{layer}}$ .

### 6.3.5 Mapping to resource elements

For each of the antenna ports used for transmission of the physical channel, the block of complex-valued symbols  $y^{(p)}(0), \dots, y^{(p)}(M_{\text{symb}}^{\text{ap}} - 1)$  shall conform to the downlink power allocation specified in clause 5.2 in TS 36.213 [4] and be mapped in sequence starting with  $y^{(p)}(0)$  to resource elements  $(k, l)$  which meet all of the following criteria in the current subframe:

- they are in the physical resource blocks corresponding to the virtual resource blocks assigned for transmission, and
- they are not used for transmission of the core part of PBCH, synchronization signals, and
- they are assumed by the UE not to be used for cell-specific reference signals, where the positions of the cell-specific reference signals are given by clause 6.10.1.2 with the number of antenna ports for and the frequency shift of cell-specific reference signals derived as described in clause 6.10.1.2 4, and

The mapping to resource elements  $(k, l)$  on antenna port  $p$  not reserved for other purposes shall be in increasing order of first the index  $k$  over the assigned physical resource blocks and then the index  $l$ , starting with the first slot in a subframe.

For BL/CE UEs, if the higher layer parameter *ce-punctured-subcarriers-DL* is configured, then in case of MPDCCH or PDSCH transmission associated with C-RNTI or SPS C-RNTI,

- The parameter *ce-punctured-subcarriers-DL* indicates the number of subcarriers (1 or 2) and their position (lower or higher edge) to puncture at the downlink narrowband edges:

- If the value is '00', then the number of punctured subcarriers on the higher edge of narrowbands above the DC subcarrier is 2 and the number of punctured subcarriers on the higher edge of narrowbands below the DC subcarrier is 1.
- If the value is '01', then the number of punctured subcarriers on the higher edge of narrowbands above the DC subcarrier is 1 and the number of punctured subcarriers on the higher edge of narrowbands below the DC subcarrier is 0.
- If the value is '10', then the number of punctured subcarriers on the lower edge of narrowbands above the DC subcarrier is 0 and the number of punctured subcarriers on the lower edge of narrowbands below the DC subcarrier is 1.
- If the value is '11', then the number of punctured subcarriers on the lower edge of narrowbands above the DC subcarrier is 1 and the number of punctured subcarriers on the lower edge of narrowbands below the DC subcarrier is 2.
- In the mapping to resource elements, when a subcarrier  $k$  is punctured according to the above, the resource elements  $(k,l)$  shall be counted but not used for transmission.
- The subcarrier puncturing is applied to transmission of the following physical signals and channels when the transmission is aligned with a narrowband edge.
  - MPDCCH
  - PDSCH
  - CSI reference signals
- No subcarrier puncturing is applied to transmissions that are not aligned with a narrowband edge.

## 6.4 Physical downlink shared channel

The physical downlink shared channel shall be processed and mapped to resource elements as described in clause 6.3 with the following additions and exceptions:

- In resource blocks in which UE-specific reference signals are not transmitted, the PDSCH shall be transmitted on the same set of antenna ports as the PBCH, which is one of  $\{0\}$ ,  $\{0,1\}$ , or  $\{0,1,2,3\}$ .
- In resource blocks in which UE-specific reference signals are transmitted, the PDSCH shall be transmitted on antenna port(s)  $\{5\}$ ,  $\{7\}$ ,  $\{8\}$ ,  $\{11\}$ ,  $\{13\}$ ,  $\{11,13\}$ ,  $p \in \{7,8,\dots,v+6\}$ , or the antenna ports listed in Table 6.3.4.4-1, where  $v$  is the number of layers used for transmission of the PDSCH.
- If PDSCH is transmitted in MBSFN subframes as defined in TS 36.213 [4], the PDSCH shall be transmitted on one or several of antenna port(s)  $p \in \{7,8,\dots,v+6\}$  or on the antenna ports indicated in Table 6.3.4.4-1, where  $v$  is the number of layers used for transmission of the PDSCH.
- PDSCH is not mapped to resource elements used for UE-specific reference signals associated with PDSCH
- In mapping to resource elements, the same positions of the cell-specific reference shall be assumed for all antenna ports on which the PDSCH is transmitted and the positions of the cell-specific reference signals are given by clause 6.10.1.2 with the number of antenna ports and the frequency shift of the cell-specific reference signals derived as described in clause 6.10.1.2, unless indicated otherwise in clause 7.1.9 in TS 36.213 [4],
  - if one set of parameters for cell-specific reference signal positions are provided by clause 7.1.9 in TS 36.213 [4], the values of these parameters are used for all antenna ports whereon the PDSCH is transmitted in the resource blocks indicated by the relevant DCI.
  - if two sets of parameters for cell-specific reference signal positions are provided by clause 7.1.9 in TS 36.213 [4], the first set of parameters are used for the set of antenna ports associated with PDSCH codeword  $q = 0$  while the second set of parameters are used for the set of antenna ports associated with PDSCH codeword  $q = 1$ , according to codeword-to-layer mapping and layer-to-port mapping in Clause 6.3.3.2 and Clause 6.3.4.4, respectively.

- If the DCI associated with the PDSCH uses the C-RNTI or semi-persistent C-RNTI, PDSCH modulation symbols on the indicated antenna ports are not mapped to resource elements assumed by the UE to be used for transmission of:
  - zero-power CSI reference signals, where the positions of the CSI reference signals assumed for each antenna port are given by clause 6.10.5.2. The configuration for zero power CSI reference signals is
    - obtained as described in clause 6.10.5.2 and used for all antenna ports whereon the PDSCH is transmitted, unless indicated otherwise in clause 7.1.9 in TS 36.213 [4]
    - if one set of parameters for zero power CSI reference signal configuration is provided by clause 7.1.9 in TS 36.213 [4], the values of these parameters are used for all antenna ports on which the PDSCH is transmitted in the resource blocks indicated by the corresponding DCI scheduling the PDSCH, and
    - if two sets of parameters for zero power CSI reference signal configuration are provided by clause 7.1.9 in TS 36.213 [4], the first set of parameters are used for the set of antenna ports associated with PDSCH codeword  $q = 0$  while the second set of parameters are used for the set of antenna ports associated with PDSCH codeword  $q = 1$ , according to codeword-to-layer mapping and layer-to-port mapping in Clause 6.3.3.2 and Clause 6.3.4.4, respectively.
  - obtained by higher-layer configuration of up to five reserved CSI-RS resources as part of the discovery signal configuration following the procedure for zero-power CSI-RS in clause 6.10.5.2.
- non-zero-power CSI reference signals for CSI reporting, except for non-zero power CSI reference signals configured by *csi-RS-ConfigNZP-ApList*, where the positions of the non-zero-power CSI reference signals for CSI reporting are given by clause 6.10.5.2. The configuration for non-zero power CSI reference signals is obtained as described in clause 6.10.5.2.
- PDSCH is not mapped to any physical resource-block pair(s) carrying an EPDCCH associated with the PDSCH.
- PDSCH with subframe duration on antenna port 7, 8, 9, 10, 11, 12, 13 or 14 is not mapped to any physical resource-block pair(s) carrying PBCH or synchronization signals.
- Frame structure type 1, PDSCH on antenna port 5 is not mapped to any physical resource-block pair(s) carrying PBCH or synchronization signals.
- Frame structure type 2, PDSCH on antenna port 5 is not mapped to any physical resource-block pair(s) carrying PBCH.
- For frame structure type 1 and 2, the index  $l$  in the first slot in a subframe fulfils  $l \geq l_{\text{DataStart}}$  where  $l_{\text{DataStart}}$  is given by clause 7.1.6.4 of TS 36.213 [4].
- For frame structure type 3,
  - if the higher layer parameter *subframeStartPosition* indicates 's07' and the downlink transmission starts in the second slot of a subframe
    - the index  $l$  in the second slot in a subframe fulfils  $l \geq l_{\text{DataStart}}$  where  $l_{\text{DataStart}}$  is given by clause 7.1.6.4 of TS 36.213 [4],
  - otherwise
    - the index  $l$  in the first slot in a subframe fulfils  $l \geq l_{\text{DataStart}}$  where  $l_{\text{DataStart}}$  is given by clause 7.1.6.4 of TS 36.213 [4],
- In mapping to resource elements, if the DCI associated with the PDSCH uses the C-RNTI or semi-persistent C-RNTI, and transmit diversity according to clause 6.3.4.3 is used, and if the higher-layer parameter *semiOpenLoop* is not set and if the DCI associated with the PDSCH is not of format 7, resource elements in an OFDM symbol assumed by the UE to contain CSI-RS shall be used in the mapping if and only if all of the following criteria are fulfilled:
  - there is an even number of resource elements for the OFDM symbol in each resource block assigned for transmission, and

- the complex-valued symbols  $y^{(p)}(i)$  and  $y^{(p)}(i+1)$ , where  $i$  is an even number, can be mapped to resource elements  $(k,l)$  and  $(k+n,l)$  in the same OFDM symbol with  $n < 3$ .
- In mapping to resource elements, if the DCI associated with the PDSCH uses C-RNTI or semi-persistent C-RNTI and if the higher-layer parameter *semiOpenLoop* is set for subframe PDSCH or the higher-layer parameter *semiOpenLoop-STTI* is set for slot/subslot PDSCH or if the DCI associated with the PDSCH is of format 7 and transmit diversity according to clause 6.3.4.3 is used, a pair of resource elements  $(k',l)$ ,  $(k'+n,l)$  shall be used in the mapping if and only if
  - the complex-valued symbols  $y^{(p)}(i)$  and  $y^{(p)}(i+1)$  can be mapped to resource elements  $(k',l)$  and  $(k'+n,l)$  in the same OFDM symbol and the same PRB with  $n < 3$ , where  $i$  is an even number and  $k'$  starts from 0 at the lowest subcarrier of the PRB.

### 6.4.1 Physical downlink shared channel for BL/CE UEs

For BL/CE UEs, the following additions and exceptions hold in addition to those in clause 6.4:

- The maximum number of allocatable PRBs for PDSCH is restricted as follows:
  - If the PDSCH is associated with C-RNTI or SPS C-RNTI and the higher layer parameter *ce-pdsch-maxBandwidth-config* is set,
    - if the higher layer parameter *ce-pdsch-maxBandwidth-config* is set to 20 MHz, the maximum number of allocatable PRBs for PDSCH is 96 PRBs restricted to the narrowbands defined in clause 6.2.7;
    - if the higher layer parameter *ce-pdsch-maxBandwidth-config* is set to 5 MHz, the maximum number of allocatable PRBs for PDSCH is 24 PRBs restricted to no more than four of the narrowbands defined in clause 6.2.7.
  - If the PDSCH is associated with G-RNTI and the higher layer parameter *pdsch-MaxBandwidth-SC-MTCH* is set to 24 PRBs, the maximum number of allocatable PRBs for PDSCH is 24 PRBs restricted to no more than four of the narrowbands defined in clause 6.2.7.
  - For all other cases, the maximum number of allocatable PRBs for PDSCH is 6 PRBs restricted to one of the narrowbands defined in clause 6.2.7.
- Resource elements occupied by CSI reference signals shall be counted in the PDSCH mapping but not used for transmission of the PDSCH.
- Resource elements belonging to synchronization signals, the core part of PBCH, PBCH repetitions, or resource elements reserved for reference signals in the mapping operation of PBCH but not used for transmission of reference signals, shall be counted in the PDSCH mapping but not used for transmission of the PDSCH.
- PRB pairs occupied by RSS shall be counted in the PDSCH mapping but not used for transmission of the PDSCH.
- For BL/CE UEs in CEModeB configured in transmission mode 9, in MBSFN subframe(s), resource elements that correspond to the positions of cell-specific reference signals as in subframe #0 shall not be counted in the PDSCH mapping and not used for transmission of the PDSCH.
- Resource elements belonging to PRBs in which PRS is transmitted (including PRS muted subframes) shall be counted in the PDSCH mapping but not used for transmission of the PDSCH.
- If the higher layer parameter *ce-punctured-subcarriers-DL* is configured, and the DCI associated with the PDSCH uses C-RNTI or SPS C-RNTI, and transmit diversity according to clause 6.3.4.3 is used,
  - In the mapping to resource elements, when the complex-valued symbols  $y^{(p)}(i)$  and  $y^{(p)}(i+1)$ , where  $i$  is an even number, are mapped to resource elements  $(k,l)$  and  $(k+n,l)$  in the same OFDM symbol with  $n < 3$ , then if *ce-punctured-subcarriers-DL* indicates that any of  $(k,l)$  and  $(k+n,l)$  shall be counted but not used for transmission, the UE shall assume that both  $(k,l)$  and  $(k+n,l)$  are counted but not used for transmission.

- If PDSCH transmission in the LTE control region is configured by higher layer parameter *transmissionInControlChRegion*, after the initial mapping of the PDSCH to resource elements  $(k, l)$  starting from  $l = l_{\text{DataStart}}$  in the first slot to the last OFDM symbol available for downlink transmission in the subframe has been performed, the mapping shall continue with resource elements  $(k, l)$  not reserved for cell-specific reference signals in increasing order of first the index  $k$  over the assigned physical resource blocks and then the index  $l$  starting from  $l = 0$  in the first slot to  $l = l_{\text{DataStart}} - 1$  in the first slot, where  $l_{\text{DataStart}}$  is given by clause 7.1.6.4 of TS 36.213 [4].

For BL/CE UEs, if the PDSCH is not carrying SIB1-BR the PRB resources for PDSCH transmission in the first subframe are obtained from the DCI as described in clauses 5.3.3.1.12, 5.3.3.1.13, and 5.5.1.3.14 in [3], or provided by higher layers. Each of the  $N_{TB} \geq 1$  PDSCH codewords is transmitted with  $N_{\text{rep}}^{\text{PDSCH}} \geq 1$  repetitions, where  $N_{TB}$  is the number of transport blocks defined in clause 7.1.11 of TS 36.213 [4]. The PDSCH transmission spans  $N_{\text{abs}}^{\text{PDSCH}} \geq N_{TB} N_{\text{rep}}^{\text{PDSCH}}$  consecutive subframes, including subframes that are not BL/CE DL subframes where the PDSCH transmission is postponed.

- If downlink resource reservation is enabled for the UE as specified in [9], and the Resource reservation field in the DCI is set to 1, then in case of PDSCH transmission associated with C-RNTI or SPS C-RNTI using UE-specific MPDCCH search space including PDSCH transmission without a corresponding MPDCCH,
- In a subframe that is fully reserved as defined in clause 7.1 in [4], the PDSCH transmission is postponed until the next BL/CE downlink subframe that is not fully reserved.
- In a subframe that is partially reserved, the reserved resource elements shall be counted in the PDSCH mapping but not used for transmission of the PDSCH.
- If frequency hopping is not enabled for PDSCH, all PDSCH repetitions are located at the same PRB resources, and
- if frequency hopping is enabled for PDSCH, the PDSCH shall be transmitted in subframe  $i$  within the  $N_{\text{abs}}^{\text{PDSCH}}$  consecutive downlink subframes using the PRB resources of the narrowband  $n_{\text{NB}}^{(i)}$  with the same RIV as that of narrowband  $n_{\text{NB}}^{(i_0)}$ . The narrowband  $n_{\text{NB}}^{(i)}$  is defined as

$$n_{\text{NB}}^{(i)} = \left( n_{\text{NB}}^{(i_0)} + \left( \left\lfloor \frac{i + i_{\Delta}}{N_{\text{NB}}^{\text{ch,DL}}} - j_0 \right\rfloor \bmod N_{\text{NB,hop}}^{\text{ch,DL}} \right) \cdot f_{\text{NB,hop}}^{\text{DL}} \right) \bmod N_{\text{NB}}^{\text{DL}}$$

$$j_0 = \left\lfloor (i_0 + i_{\Delta}) / N_{\text{NB}}^{\text{ch,DL}} \right\rfloor$$

$$i_0 \leq i \leq i_0 + N_{\text{abs}}^{\text{PDSCH}} - 1$$

$$i_{\Delta} = \begin{cases} 0, & \text{for frame structure type 1} \\ N_{\text{NB}}^{\text{ch,DL}} - 2, & \text{for frame structure type 2} \end{cases}$$

where  $i_0$  is the absolute subframe number of the first downlink subframe intended for PDSCH and  $N_{\text{NB}}^{\text{ch,DL}}$ ,  $N_{\text{NB,hop}}^{\text{ch,DL}}$  and  $f_{\text{NB,hop}}^{\text{DL}}$  are cell-specific higher-layer parameters. For PDSCH carrying SI other than SIB1-BR and for PDSCH associated with P-RNTI, if *interval-DLHoppingConfigCommonModeB* is signalled in SIB1-BR, then the frequency hopping granularity  $N_{\text{NB}}^{\text{ch,DL}}$  is set to *interval-DLHoppingConfigCommonModeB*; otherwise,  $N_{\text{NB}}^{\text{ch,DL}}$  is set to *interval-DLHoppingConfigCommonModeA* signalled in SIB1-BR.

For BL/CE UE in CEModeA, frequency hopping of PDSCH associated with C-RNTI or SPS C-RNTI is enabled when higher layer parameter *mpdcch-pdsch-HoppingConfig* is set and the frequency hopping flag in DCI format 6-1A indicates frequency hopping, otherwise, frequency hopping of is not enabled. For BL/CE UE in CEModeB, frequency hopping of PDSCH associated with C-RNTI or SPS C-RNTI is enabled when higher layer parameter *mpdcch-pdsch-HoppingConfig* is set, otherwise, frequency hopping of is not enabled.

The UE shall not expect PDSCH in subframe  $i$  if it is not a BL/CE DL subframe.

For BL/CE UEs, if the PDSCH carries SIB1-BR, the PDSCH transmission is repeated periodically in every period of 8 radio frames, where a period starts with a radio frame with  $n_f \bmod 8 = 0$  where  $n_f$  is the system frame number. The PDSCH is transmitted  $N_{\text{PDSCH}}^{\text{SIB1-BR}}$  times in each period of 8 frames, Let  $\{s_j\}$  be the set of narrowbands, excluding

narrowbands overlapping with the 72 center subcarriers for  $N_{RB}^{DL} > 15$ , and ordered in increasing order of narrowband index. The PDSCH transmission cycles through the set  $\{s_i\}$  of narrowbands in increasing order of  $i$ , starting with  $i=0$  for the first subframe, according to

$$\begin{aligned}
 n_{NB} &= s_j \\
 j &= \left( N_{ID}^{cell} \bmod N_{NB}^S + i \cdot \left\lfloor N_{NB}^S / m \right\rfloor \right) \bmod N_{NB}^S \\
 i &= 0, 1, \dots, m-1 \\
 m &= \begin{cases} 1 & N_{RB}^{DL} < 12 \\ 2 & 12 \leq N_{RB}^{DL} \leq 50 \\ 4 & 50 < N_{RB}^{DL} \end{cases}
 \end{aligned}$$

where  $N_{NB}^S$  is the number of narrowbands in the set  $\{s_i\}$ .

The set of frames and subframes used for SIB1-BR transmission in each period are given by Tables 6.4.1-1 and 6.4.1-2.

**Table 6.4.1-1: The set of frames and subframes for SIB1-BR for  $N_{RB}^{DL} \leq 15$ .**

| $N_{SIB1-BR}^{PDSCH}$ | $N_{ID}^{cell} \bmod 2$ | Frame structure type 1 |          | Frame structure type 2 |          |
|-----------------------|-------------------------|------------------------|----------|------------------------|----------|
|                       |                         | $n_f \bmod 2$          | $n_{sf}$ | $n_f \bmod 2$          | $n_{sf}$ |
| 4                     | 0                       | 0                      | 4        | 1                      | 5        |
|                       | 1                       | 1                      | 4        | 1                      | 5        |

**Table 6.4.1-2: The set of frames and subframes for SIB1-BR for  $N_{RB}^{DL} > 15$ .**

| $N_{SIB1-BR}^{PDSCH}$ | $N_{ID}^{cell} \bmod 2$ | Frame structure type 1 |          | Frame structure type 2 |          |
|-----------------------|-------------------------|------------------------|----------|------------------------|----------|
|                       |                         | $n_f \bmod 2$          | $n_{sf}$ | $n_f \bmod 2$          | $n_{sf}$ |
| 4                     | 0                       | 0                      | 4        | 1                      | 5        |
|                       | 1                       | 1                      | 4        | 1                      | 0        |
| 8                     | 0                       | 0, 1                   | 4        | 0, 1                   | 5        |
|                       | 1                       | 0, 1                   | 9        | 0, 1                   | 0        |
| 16                    | 0                       | 0, 1                   | 4, 9     | 0, 1                   | 0, 5     |
|                       | 1                       | 0, 1                   | 0, 9     | 0, 1                   | 0, 5     |

BL/CE UEs may assume the same precoding matrix being used for a PRB across a block of  $N_{NB}^{ch,DL}$  consecutive subframes when UE-specific reference signals are transmitted together with the PDSCH, where the subframe number of the first subframe in each block of  $N_{NB}^{ch,DL}$  consecutive subframes, denoted as  $n_{abs,1}$ , satisfies  $(n_{abs,1} + i_{\Delta}) \bmod N_{NB}^{ch,DL} = 0$ .

For PDSCH transmission associated with SI-RNTI or P-RNTI to BL/CE UEs, frequency hopping of the PDSCH is enabled when higher layer parameter *si-HoppingConfigCommon* is set.

For PDSCH transmission associated with PUR-RNTI to BL/CE UEs using UE-specific MPDCCH search space, frequency hopping of the PDSCH is enabled when higher layer parameter *pur-PDSCH-FreqHopping* is set.

For PDSCH transmission associated with RA-RNTI or temporary C-RNTI to BL/CE UEs, frequency hopping of the PDSCH is enabled when higher layer parameter *rar-HoppingConfig* is set. Further

- if PRACH CE level 0 or 1 is used for the last PRACH attempt,  $N_{NB}^{ch,DL}$  is set to the higher layer parameter *interval-DlHoppingConfigCommonModeA*;
- if PRACH CE level 2 or 3 is used for the last PRACH attempt,  $N_{NB}^{ch,DL}$  is set to the higher layer parameter *interval-DlHoppingConfigCommonModeB*.

For PDSCH transmission associated with SC-RNTI to BL/CE UEs, frequency hopping of the PDSCH is enabled when higher layer parameter *mpdcch-pdsch-HoppingConfig-SC-MCCH* is set. Further

- if *mpdcch-pdsch-HoppingConfig-SC-MCCH* is set to CEModeA,  $N_{NB}^{ch,DL}$  is set to the higher layer parameter *interval-DIHoppingConfigCommonModeA*;
- if *mpdcch-pdsch-HoppingConfig-SC-MCCH* is set to CEModeB,  $N_{NB}^{ch,DL}$  is set to the higher layer parameter *interval-DIHoppingConfigCommonModeB*.

For PDSCH transmission associated with G-RNTI to BL/CE UEs,

- if the higher layer parameter *mpdcch-pdsch-CEmodeConfig-SC-MTCH* is set to CEModeA,
  - if the higher layer parameter *mpdcch-pdsch-HoppingConfig-SC-MTCH* is set and the frequency hopping flag in DCI format 6-1A indicates frequency hopping, then frequency hopping of the PDSCH is enabled and  $N_{NB}^{ch,DL}$  is set to the higher layer parameter *interval-DIHoppingConfigCommonModeA*, otherwise frequency hopping is not enabled;
- if the higher layer parameter *mpdcch-pdsch-CEmodeConfig-SC-MTCH* is set to CEModeB,
  - if the higher layer parameter *mpdcch-pdsch-HoppingConfig-SC-MTCH* is set, then frequency hopping of the PDSCH is enabled and  $N_{NB}^{ch,DL}$  is set to the higher layer parameter *interval-DIHoppingConfigCommonModeB*, otherwise frequency hopping is not enabled.

## 6.4.2 Slot/subslot-based physical downlink shared channel

For slot or subslot-based PDSCH, in this specification referred to as slot-PDSCH and subslot-PDSCH respectively, the following additions and exceptions hold in addition to those in clause 6.4:

- PDSCH is not mapped to resource elements of SCCEs used by the associated SPDCCH, or resource elements used for UE-specific reference signals associated with SPDCCH
- In case of slot-PDSCH:
  - the mapping to resource elements  $(k, l)$  on antenna port  $p$  not reserved for other purposes shall be in increasing order of first the index  $k$  over the assigned physical resource blocks and then the index  $l$ , for the slot of the assigned physical resources in the subframe, and
  - in case of UE-specific reference signals, the PDSCH is not mapped to any physical resource blocks carrying PBCH.
- In case of subslot-PDSCH:
  - the mapping to resource elements  $(k, l)$  on antenna port  $p$  not reserved for other purposes shall be in increasing order of first the index  $k$  over the assigned physical resource blocks and then the index  $l$ , starting from  $l_0$  given in Table 6.4.2-1. The starting value  $l_0$  and the value range of  $l$  depends on the number of symbols used for PDCCH and the subslot number in the subframe, according to Table 6.4.2-1, and
  - in case of UE-specific reference signals,
    - the PDSCH is not mapped to any physical resource blocks in frequency domain carrying PBCH or synchronization signals for the OFDM symbols of the given subslot.
    - and in case the DCI associated with the subslot-PDSCH indicates the absence of the UE-specific reference signals (see *DMRS position indicator* field in TS 36.212 [3]), the PDSCH is not mapped to any physical resource blocks in frequency domain that carried PBCH or synchronization signals for the OFDM symbols of the previous subslot.

**Table 6.4.2-1: Starting value of index  $l$ , i.e.  $l_0$ , for subslot PDSCH**

| Number of symbols used for PDCCH | Downlink subslot index |    |    |    |    |    |
|----------------------------------|------------------------|----|----|----|----|----|
|                                  | #0                     | #1 | #2 | #3 | #4 | #5 |
| 1                                | 1                      | 3  | 5  | 0  | 2  | 4  |
| 2                                | -                      | 2  | 5  | 0  | 2  | 4  |

|   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|
| 3 | - | 3 | 5 | 0 | 2 | 4 |
|---|---|---|---|---|---|---|

- For PDSCH associated with UE-specific reference signals,
  - the PDSCH shall only be mapped to physical resource blocks in frequency domain assigned for PDSCH transmission where the assignment maps to both physical resource blocks of a PRG.
  - the subslot-PDSCH shall not be mapped to the physical resource blocks of a PRG in case the resource elements of the associated SPDCCH are mapped to those physical resource blocks.
- In addition, the following additions and exceptions related to L1 signaling and/or higher layer configuration controlling rate-matching around SPDCCH resources hold:
  - PDSCH is not mapped to resource elements belonging to a SPDCCH resource set configured with higher layer parameter *rateMatchingMode* indicating 'm2' if either this SPDCCH resource set is not configured with higher layer parameter *spdcch-L1-ReuseIndication* or it is configured with higher layer parameter *spdcch-L1-ReuseIndication* 'n1' or 'n2' indicating '0' for the SPDCCH resource set.
  - PDSCH is not mapped to resource elements belonging to a SPDCCH resource set configured with higher layer parameter *rateMatchingMode* indicating 'm3' if the SPDCCH associated with PDSCH is found in this SPDCCH resource set and if either this SPDCCH resource set is not configured with higher layer parameter *spdcch-L1-ReuseIndication* or it is configured with higher layer parameter *spdcch-L1-ReuseIndication* 'n1' or 'n2' indicating '0' for the SPDCCH resource set. If the SPDCCH associated with PDSCH is found on a candidate belonging to two SPDCCH resource sets, the SPDCCH is assumed to be found in both SPDCCH resource sets.
  - PDSCH is not mapped to resource elements belonging to a SPDCCH resource set configured with higher layer parameter *rateMatchingMode* indicating 'm4' if the SPDCCH associated with PDSCH is not found in this SPDCCH resource set and if either this SPDCCH resource set is not configured with higher layer parameter *spdcch-L1-ReuseIndication* or it is configured with higher layer parameter *spdcch-L1-ReuseIndication* 'n1' or 'n2' indicating '0' for the SPDCCH resource set.
  - PDSCH is not mapped to resource elements belonging to a SPDCCH resource set configured with higher layer parameter *spdcch-L1-ReuseIndication* 'n0' if the bit of the Used/Unused SPDCCH resource indication field corresponding to this SPDCCH resource set in the DCI format 7 associated with PDSCH is set to 1.
  - PDSCH is not mapped to resource elements belonging to  $\text{SCCE}\# \left( \left\lfloor \frac{N_{\text{SCCE},m}}{2} \right\rfloor - 1 \right)$  of a SPDCCH resource set configured with higher layer parameter *spdcch-L1-ReuseIndication* 'n1' or 'n2' indicating '2' for the SPDCCH resource set if the most significant bit of the Used/Unused SPDCCH resource indication field in the DCI format 7 associated with PDSCH is set to 1.
  - PDSCH is not mapped to resource elements belonging to  $\text{SCCE}\# \left\lfloor \frac{N_{\text{SCCE},m}}{2} \right\rfloor$  to  $\text{SCCE}\# (N_{\text{SCCE},m} - 1)$  of a SPDCCH resource set configured with higher layer parameter *spdcch-L1-ReuseIndication* 'n1' or 'n2' indicating '2' for the SPDCCH resource set if the least significant bit of the Used/Unused SPDCCH resource indication field in the DCI format 7 associated with PDSCH is set to 1.
  - It should be noted that not mapping PDSCH to resource elements belonging to a SPDCCH resource set holds irrespective of other indications (*spdcch-L1-ReuseIndication* or *rateMatchingMode*) associated with other SPDCCH resource sets (if configured).
  - For a UE with the higher-layer parameter *blindSlotSubslotPDSCH-Repetitions* set to TRUE and PDSCH associated with a downlink assignment sent on PDCCH/SPDCCH with DCI format 7 indicating  $k$  transmissions, the rate-matching around SPDCCH resources if applicable for PDSCH in the  $k - 1$  valid slots/subslots following the slot/subslot containing the downlink assignment follows
    - the rate-matching around SPDCCH resources of the PDSCH in the slot/subslot containing the downlink assignment, if the DCI format 7 indicating  $k$  transmissions is received on SPDCCH.
    - the rate-matching around SPDCCH resources of the PDSCH in the SPDCCH resource set according to

*rateMatchingMode* indicating 'm2', if configured by higher layers, if the DCI format 7 indicating  $k$  transmissions is received on PDCCH. For other configurations of *rateMatchingMode*, no rate-matching around SPDCH resources for PDSCH in the  $k - 1$  valid slots/subslots following the PDCCH with DCI format 7 indicating  $k$  PDSCH transmissions is applied..

## 6.5 Physical multicast channel

The physical multicast channel shall be processed and mapped to resource elements as described in clause 6.3 with the following exceptions:

- No transmit diversity scheme is specified.
- Layer mapping and precoding shall be done assuming a single antenna port and the transmission shall use antenna port 4.
- The PMCH can only be transmitted in the MBSFN region. For PMCH with  $\Delta f = 15$  kHz, the index  $l$  in the first slot in the MBSFN subframe fulfils  $l \geq l_{\text{PMCHStart}}$  where  $l_{\text{PMCHStart}}$  is equal to the value given by the higher layer parameter *non-MBSFNregionLength* [9].
- The PMCH shall use extended cyclic prefix.
- The PMCH is not mapped to resource elements used for transmission of MBSFN reference signals.
- In clause 6.3.1, for  $\Delta f = 1.25$  kHz and  $\Delta f \approx 0.37$  kHz, the scrambling generator shall be initialised at the start of each slot.
- For  $\Delta f = 1/(82944T_s) \approx 0.37$  kHz the following exception applies to clause 6.3.5:
  - The text "which meet all of the following criteria in the current subframe" shall be replaced by "which meet all of the following criteria in the current slot"
  - The mapping to resource elements  $(k, l)$  on antenna port  $p$  not reserved for other purposes shall be in increasing order of first the index  $k$  over the assigned physical resource blocks and then the index  $l$ .
- For PMCH symbols belonging to an MBSFN area with  $N_{\text{RB}}^{\text{PMCH}}$  configured,  $N_{\text{RB}}^{\text{DL}}$  shall be replaced by  $N_{\text{RB}}^{\text{PMCH}}$  in clauses 6.3, 6.10.2, and 6.12.
- If cyclic shifting is configured by the higher-layer parameter XXX,
  - cyclic shifting according to clause 6.5.1 shall be applied
  - modulation in clause 6.3.2 shall use  $\bar{b}(0), \dots, \bar{b}(M_{\text{bit}} - 1)$  instead of  $\tilde{b}(0), \dots, \tilde{b}(M_{\text{bit}} - 1)$
- If frequency-domain interleaving is configured by the higher-layer parameter XXX,
  - block interleaving according to clause 6.5.2 shall be applied
  - mapping to resource elements in clause 6.3.5 shall use  $\tilde{y}^{(p)}(0), \dots, \tilde{y}^{(p)}(M_{\text{symp}}^{\text{ap}} - 1)$  instead of  $y^{(p)}(0), \dots, y^{(p)}(M_{\text{symp}}^{\text{ap}} - 1)$

### 6.5.1 Cyclic shift for PMCH

The input to the cyclic shift is the block of bits  $\tilde{b}(0), \dots, \tilde{b}(M_{\text{bit}} - 1)$  defined in clause 6.3.1 and the output is a block of bits  $\bar{b}(0), \dots, \bar{b}(M_{\text{bit}} - 1)$ .

The block of bits  $\tilde{b}(0), \dots, \tilde{b}(M_{\text{bit}} - 1)$  shall be cyclically shifted by  $X_i$  bits to form the block  $\bar{b}(0), \dots, \bar{b}(M_{\text{bit}} - 1)$  according to

$$\bar{b}(n) = \tilde{b}((n - X_i) \bmod M_{\text{bit}})$$

where

- $X_i$  is given by

- if the higher-layer parameter *pmch-CyclicShiftAlpha* is set to *alpha1* or *alpha2*

$$X_i = \sum_{r=C-S_i}^{C-1} E_r$$

$$S_i = i\alpha \bmod C$$

- if the higher-layer parameter *pmch-CyclicShiftAlpha* is set to *alpha3*

$$X_i = A_i(n_f, n_{sf}) \left\lfloor \frac{N_{sc} Q_m}{N} \right\rfloor$$

$$A_i(n_f, n_{sf}) = \left( \sum_{m=0}^7 c(8(10(n_f \bmod 128) + n_{sf}) + m) 2^m \right) \bmod N$$

where the pseudo-random sequence  $c(i)$  is defined by clause 7.2 and shall be initialized with  $c_{\text{init}} = N_{\text{ID}}^{\text{MBSFN}}$  at the beginning of each radio frame for which  $n_f \bmod 128 = 0$ , the number of subcarriers available in one OFDM symbol for PMCH is given by  $N_{sc} = M_{\text{bit}} / (Q_m L)$ , and  $Q_m$  is the modulation order.

- $i \in \{0, 1, \dots, N - 1\}$  denotes the  $i^{\text{th}}$  subframe to which the transport block is mapped
- $N$  is the number of subframes to which the transport block is mapped
- $E_r$  is the number of bits in the  $r^{\text{th}}$  codeblock within a subframe as defined in TS 36.212 [3]
- $C$  is the number of codeblocks in the transport block
- $\alpha$  is given by
  - if the higher-layer parameter XXX is set to *alphaOne*

$$\alpha = 1$$

- if the higher-layer parameter XXX is set to *alphaOther*

$$\alpha = \left\lfloor \frac{C}{NL} \right\rfloor$$

- $L$  is the number of OFDM symbols used for the PMCH transmission.

## 6.5.2 Frequency-domain interleaving

The input to the interleaver is the block of complex-valued symbols  $y^{(p)}(0), \dots, y^{(p)}(M_{\text{symb}}^{\text{ap}} - 1)$  defined in clause 6.3.4.1 and the output from the interleaver is a block of complex-valued symbols  $\tilde{y}^{(p)}(0), \dots, \tilde{y}^{(p)}(M_{\text{symb}}^{\text{ap}} - 1)$ .

Interleaving shall be performed as follows:

- Divide the block of complex-valued symbols  $y^{(p)}(0), \dots, y^{(p)}(M_{\text{symb}}^{\text{ap}} - 1)$  into  $L$  sets such that set  $l \in \{0, 1, \dots, L - 1\}$  contains the complex-valued symbols to be mapped to OFDM symbol  $l$
- For each of the sets  $l = 0, 1, \dots, L - 1$ 
  - Set the number of columns  $K$  of the block interleaver to

$$K = \frac{C}{\text{gcd}(L, C)}$$

where

- $L$  is the number of OFDM symbols used for the PMCH transmission
- $C$  is the number of codeblocks as defined in clause 5.1.2 of [36.212]
- $\text{gcd}(u, v)$  denotes the greatest common divisor of  $u$  and  $v$

- Set the number of rows of the block interleaver  $R$  to the smallest integer fulfilling

$$M_l \leq RK$$

where

- $M_l$  is the number of resources elements available for mapping of complex-valued modulation symbols in OFDM symbol  $l$
- Write the modulation symbols  $y^{(p)}(i)$  in set  $l$  column-wise into the block interleaver in increasing order of  $i$ , starting with column 0 and row 0 and in increasing order of first the row number and then the column number. If  $M_l < RK$ , append <NULL> elements to fill the size- $RK$  block interleaver.
- If  $\sqrt{RK} - K + 1 > 0$ , permute the rows such that row  $r_i$  is moved to row  $i$  where

$$r_i = \begin{cases} r_{i-1} + d & r_{i-1} \leq R - d - 1 \\ \lfloor id/R \rfloor & \text{otherwise} \end{cases}$$

$$d = \left\lceil R / \left\lfloor \frac{R}{\lfloor \sqrt{RK} - K + 1 \rfloor} \right\rfloor \right\rceil$$

$$r_0 = 0$$

$$1 \leq i \leq R - 1$$

- Cyclically shift the columns of row  $r$  with an offset  $s_r$  given by

$$s_r = \left( (-1)^r \left\lfloor \frac{r+1}{2} \right\rfloor \right) \bmod K$$

$$r = 0, 1, \dots, R - 1$$

- Read the interleaved modulation symbols  $\tilde{y}^{(p)}(i)$  in set  $l$  row-wise from the block interleaver in increasing order of  $i$ , starting with column 0 and row 0 and in increasing order of first the column number and then the row number, discarding any <NULL> elements.

## 6.6 Physical broadcast channel

The PBCH is not transmitted for frame structure type 3.

### 6.6.1 Scrambling

The block of bits  $b(0), \dots, b(M_{\text{bit}} - 1)$ , where  $M_{\text{bit}}$ , the number of bits transmitted on the physical broadcast channel, equals 1920 for normal cyclic prefix and 1728 for extended cyclic prefix, shall be scrambled with a cell-specific sequence prior to modulation, resulting in a block of scrambled bits  $\tilde{b}(0), \dots, \tilde{b}(M_{\text{bit}} - 1)$  according to

$$\tilde{b}(i) = (b(i) + c(i)) \bmod 2$$

where the scrambling sequence  $c(i)$  is given by clause 7.2. The scrambling sequence shall be initialised with

$c_{\text{init}} = N_{\text{ID}}^{\text{cell}}$  in each radio frame fulfilling  $n_f \bmod 4 = 0$ . For an MBMS-dedicated cell, the scrambling sequence shall be initialised with  $c_{\text{init}} = 2^9 + N_{\text{ID}}^{\text{cell}}$  in each radio frame fulfilling  $n_f \bmod 16 = 0$ .

### 6.6.2 Modulation

The block of scrambled bits  $\tilde{b}(0), \dots, \tilde{b}(M_{\text{bit}} - 1)$  shall be modulated as described in clause 7.1, resulting in a block of complex-valued modulation symbols  $d(0), \dots, d(M_{\text{symb}} - 1)$ . Table 6.6.2-1 specifies the modulation mappings applicable for the physical broadcast channel.

**Table 6.6.2-1: PBCH modulation schemes.**

| Physical channel | Modulation schemes |
|------------------|--------------------|
| PBCH             | QPSK               |

### 6.6.3 Layer mapping and precoding

The block of modulation symbols  $d(0), \dots, d(M_{\text{symb}} - 1)$  shall be mapped to layers according to one of clauses 6.3.3.1 or 6.3.3.3 with  $M_{\text{symb}}^{(0)} = M_{\text{symb}}$  and precoded according to one of clauses 6.3.4.1 or 6.3.4.3, resulting in a block of vectors  $y(i) = [y^{(0)}(i) \ \dots \ y^{(P-1)}(i)]^T$ ,  $i = 0, \dots, M_{\text{symb}} - 1$ , where  $y^{(p)}(i)$  represents the signal for antenna port  $p$  and where  $p = 0, \dots, P-1$  and the number of antenna ports for cell-specific reference signals  $P \in \{1, 2, 4\}$ .

### 6.6.4 Mapping to resource elements

The block of complex-valued symbols  $y^{(p)}(0), \dots, y^{(p)}(M_{\text{symb}} - 1)$  for each antenna port shall

- for an MBMS-dedicated cell, be transmitted during 4 consecutive radio frames fulfilling  $n_f \bmod 4 = 0$ , starting in each radio frame fulfilling  $n_f \bmod 16 = 0$ , and
- otherwise, be transmitted during 4 consecutive radio frames, starting in each radio frame fulfilling  $n_f \bmod 4 = 0$ .

The block of complex-valued symbols shall be mapped in sequence starting with  $y(0)$  to resource elements  $(k, l)$  constituting the core set of PBCH resource elements. The mapping to resource elements  $(k, l)$  not reserved for transmission of reference signals shall be in increasing order of first the index  $k$ , then the index  $l$  in slot 1 in subframe 0 and finally the radio frame number. The resource-element indices are given by

$$k = \frac{N_{\text{RB}}^{\text{DL}} N_{\text{sc}}^{\text{RB}}}{2} - 36 + k', \quad k' = 0, 1, \dots, 71$$

$$l = 0, 1, \dots, 3$$

where resource elements reserved for reference signals shall be excluded. The mapping operation shall assume cell-specific reference signals for antenna ports 0-3 being present irrespective of the actual configuration. The UE shall assume that the resource elements assumed to be reserved for reference signals in the mapping operation above but not used for transmission of reference signal are not available for PDSCH or MPDCCH transmission. The UE shall not make any other assumptions about these resource elements.

For an MBMS-dedicated cell configured with repetition, the physical broadcast channel shall be repeated as described in clause 6.6.4.1.

For an MBMS-dedicated cell configured with CAS muting, the physical broadcast channel shall only be transmitted in the first  $4K_{\text{CAS}}$  frames, starting in frames fulfilling  $n_f \bmod 16N_{\text{CAS}} = 0$  where  $N_{\text{CAS}} \in \{2, 4, 8, 16\}$  and  $K_{\text{CAS}} \in \{4, 5, 6, \dots, 63\}$  are given by the higher-layer parameter *cas-MutingConfig*.

If a cell is configured with repetition of the physical broadcast channel

- symbols mapped to core resource element  $(k, l)$  in slot 1 in subframe 0 within a radio frame  $n_f$  according to the mapping operation above, and
- cell-specific reference signals in OFDM symbols  $l$  in slot 1 in subframe 0 within a radio frame  $n_f$  with  $l$  according to the mapping operation above

shall additionally be mapped to resource elements  $(k, l')$  in slot number  $n'_s$  within radio frame  $n_f - i$  unless resource element  $(k, l')$  is used by CSI reference signals.

For frame structure type 1,  $l'$ ,  $n'_s$ , and  $i$  are given by Table 6.6.4-1.

For frame structure type 2,

- if  $N_{\text{RB}}^{\text{DL}} > 15$ ,  $l'$  and  $n'_s$  are given by Table 6.6.4-2 and  $i = 0$ ;

- if  $7 \leq N_{RB}^{DL} \leq 15$ ,  $l'$  and  $n'_s$  are given by Table 6.6.4-2 and  $i=0$ , except that repetitions with  $n'_s = 10$  and  $n'_s = 11$  are not applied.

For both frame structure type 1 and frame structure type 2, repetition of the physical broadcast channel is not applicable if  $N_{RB}^{DL} = 6$ .

Resource elements already reserved or used for transmission of cell-specific reference signals in absence of repetition shall not be used for additional mapping of cell-specific reference signals.

**Table 6.6.4-1: Frame offset, slot and symbol number triplets for repetition of PBCH for frame structure type 1.**

| $l$ | Frame offset, slot and symbol number triplets $(i, n'_s, l')$ |                              |
|-----|---------------------------------------------------------------|------------------------------|
|     | Normal cyclic prefix                                          | Extended cyclic prefix       |
| 0   | (1,18,3), (1,19,0), (1,19,4), (0,0,4)                         | (1,18,3), (1,19,0), (1,19,5) |
| 1   | (1,18,4), (1,19,1), (1,19,5), (0,1,4)                         | (1,18,4), (1,19,1), (0,0,3)  |
| 2   | (1,18,5), (1,19,2), (1,19,6), (0,1,5)                         | (1,18,5), (1,19,2), (0,1,4)  |
| 3   | (1,18,6), (1,19,3), (0,0,3), (0,1,6)                          | (1,19,3), (1,19,4), (0,1,5)  |

**Table 6.6.4-2: Slot and symbol number pairs for repetition of PBCH for frame structure type 2.**

| $l$ | Slot and symbol number pairs $(n'_s, l')$ |                        |
|-----|-------------------------------------------|------------------------|
|     | Normal cyclic prefix                      | Extended cyclic prefix |
| 0   | (0,3), (1,4), (10,3), (11,0), (11,4)      | (0,3), (10,3), (11,0)  |
| 1   | (0,4), (1,5), (10,4), (11,1), (11,5)      | (0,4), (10,4), (11,1)  |
| 2   | (0,5), (10,5), (11,2)                     | (0,5), (10,5), (11,2)  |
| 3   | (0,6), (10,6), (11,3)                     | (1,4), (11,3), (11,4)  |

#### 6.6.4.1 PBCH repetition in the cell acquisition subframe

For a MBMS-dedicated cell with  $N_{RB}^{DL} > 6$ ,

- symbols mapped to core resource element  $(k, l)$  in slot 1 in subframe 0 within a radio frame  $n_f$  according to the mapping operation in clause 6.6.4, and
- cell-specific reference signals in OFDM symbols  $l$  in slot 1 in subframe 0 within a radio frame  $n_f$  with  $l$  according to the mapping operation in clause 6.6.4

shall additionally be multiplied by  $\theta_{k,l'}$  and mapped to resource elements  $(k, l')$  in slot number  $n'_s$  within radio frame  $n_f$  where  $l'$  and  $n'_s$  are given by Table 6.6.4.1-1 in frames fulfilling

- $n_f \bmod 4 = 0$  for  $25 \leq N_{RB}^{DL}$ ;
- $n_f \bmod 8 = 4$  for  $6 < N_{RB}^{DL} < 25$

Resource elements already reserved or used for transmission of cell-specific reference signals in absence of repetition shall not be used for additional mapping of cell-specific reference signals.

The quantity  $\theta_{k,l'}$  is given by

$$\theta_{k,l'} = e^{j\pi c(2k')/2} e^{j\pi c(2k'+1)}$$

where the relationship between  $k'$  and  $k$  is defined in clause 6.6.4, and the pseudo-random sequence  $c(i)$  is given by clause 7.2 and initialized for each OFDM symbol  $l'$  with

$$c_{\text{init}} = 2^{13} \left( (N_{\text{ID}}^{\text{cell}} + 1)(N_{\text{symb}}^{\text{DL}} n'_s + l' + 1) \right) + 2^4 N_{\text{ID}}^{\text{cell}} + (N_{\text{symb}}^{\text{DL}} n'_s + l')$$

**Table 6.6.4.1-1: Slot and symbol number pair for repetition of PBCH.**

| $l$ | Slot and symbol number pair ( $n'_s, l'$ ) |                        |
|-----|--------------------------------------------|------------------------|
|     | Normal cyclic prefix                       | Extended cyclic prefix |
| 0   | (0, 4)                                     | -                      |
| 1   | (1, 4)                                     | (0, 3)                 |
| 2   | (1, 5)                                     | (1, 4)                 |
| 3   | (0, 3), (1, 6)                             | (1, 5)                 |

## 6.7 Physical control format indicator channel

The physical control format indicator channel carries information about the number of OFDM symbols used for transmission of PDCCHs in a subframe. The set of OFDM symbols possible to use for PDCCH in a subframe is given by Table 6.7-1.

**Table 6.7-1: Number of OFDM symbols used for PDCCH**

| Subframe                                                                                                                                                              | Number of OFDM symbols for PDCCH<br>when $N_{RB}^{DL} > 10$ | Number of OFDM symbols for PDCCH<br>when $N_{RB}^{DL} \leq 10$ |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|----------------------------------------------------------------|
| Subframe 1 and 6 for frame structure type 2 or a subframe for frame structure type 3 with the same duration as the DwPTS duration of a special subframe configuration | 1, 2                                                        | 2                                                              |
| MBSFN subframes with $\Delta f = 15$ kHz and configured with 1 or 2 cell-specific antenna ports                                                                       | 1, 2                                                        | 2                                                              |
| MBSFN subframes with $\Delta f = 15$ kHz and configured with 4 cell-specific antenna ports                                                                            | 2                                                           | 2                                                              |
| MBSFN subframes with $\Delta f \in \{7.5, 2.5, 1.25\}$ kHz or MBSFN slots with $\Delta f \approx 0.37$ kHz                                                            | 0                                                           | 0                                                              |
| Non-MBSFN subframes (except subframe 6 for frame structure type 2) configured with positioning reference signals                                                      | 1, 2, 3                                                     | 2, 3                                                           |
| All other cases                                                                                                                                                       | 1, 2, 3                                                     | 2, 3, 4                                                        |

The UE may assume the PCFICH is transmitted when the number of OFDM symbols for PDCCH is greater than zero unless stated otherwise in [4, clause 12].

### 6.7.1 Scrambling

The block of bits  $b(0), \dots, b(31)$  transmitted in one subframe shall be scrambled with a cell-specific sequence prior to modulation, resulting in a block of scrambled bits  $\tilde{b}(0), \dots, \tilde{b}(31)$  according to

$$\tilde{b}(i) = (b(i) + c(i)) \bmod 2$$

where the scrambling sequence  $c(i)$  is given by clause 7.2. The scrambling sequence generator shall be initialised with  $c_{\text{init}} = (\lfloor n_s/2 \rfloor + 1) \cdot (2N_{ID}^{\text{cell}} + 1) \cdot 2^9 + N_{ID}^{\text{cell}}$  at the start of each subframe.

### 6.7.2 Modulation

The block of scrambled bits  $\tilde{b}(0), \dots, \tilde{b}(31)$  shall be modulated as described in clause 7.1, resulting in a block of complex-valued modulation symbols  $d(0), \dots, d(15)$ . Table 6.7.2-1 specifies the modulation mappings applicable for the physical control format indicator channel.

**Table 6.7.2-1: PCFICH modulation schemes**

| Physical channel | Modulation schemes |
|------------------|--------------------|
| PCFICH           | QPSK               |

### 6.7.3 Layer mapping and precoding

The block of modulation symbols  $d(0), \dots, d(15)$  shall be mapped to layers according to one of clauses 6.3.3.1 or 6.3.3.3 with  $M_{\text{symb}}^{(0)} = 16$  and precoded according to one of clauses 6.3.4.1 or 6.3.4.3, resulting in a block of vectors

$y(i) = [y^{(0)}(i) \ \dots \ y^{(P-1)}(i)]^T$ ,  $i = 0, \dots, 15$ , where  $y^{(p)}(i)$  represents the signal for antenna port  $p$  and where  $p = 0, \dots, P-1$  and the number of antenna ports for cell-specific reference signals  $P \in \{1, 2, 4\}$ . The PCFICH shall be transmitted on the same set of antenna ports as the PBCH.

### 6.7.4 Mapping to resource elements

The mapping to resource elements is defined in terms of quadruplets of complex-valued symbols. Let

$z^{(p)}(i) = \langle y^{(p)}(4i), y^{(p)}(4i+1), y^{(p)}(4i+2), y^{(p)}(4i+3) \rangle$  denote symbol quadruplet  $i$  for antenna port  $p$ . For each of the antenna ports, symbol quadruplets shall be mapped in increasing order of  $i$  to the four resource-element groups in the first OFDM symbol in a downlink subframe or DwPTS with the representative resource-element as defined in clause 6.2.4 given by

$$\begin{aligned} z^{(p)}(0) & \text{ is mapped to the resource - element group represented by } k = \bar{k} \\ z^{(p)}(1) & \text{ is mapped to the resource - element group represented by } k = \bar{k} + \left\lfloor N_{\text{RB}}^{\text{DL}} / 2 \right\rfloor \cdot N_{\text{sc}}^{\text{RB}} / 2 \\ z^{(p)}(2) & \text{ is mapped to the resource - element group represented by } k = \bar{k} + \left\lfloor 2N_{\text{RB}}^{\text{DL}} / 2 \right\rfloor \cdot N_{\text{sc}}^{\text{RB}} / 2 \\ z^{(p)}(3) & \text{ is mapped to the resource - element group represented by } k = \bar{k} + \left\lfloor 3N_{\text{RB}}^{\text{DL}} / 2 \right\rfloor \cdot N_{\text{sc}}^{\text{RB}} / 2 \end{aligned}$$

where the additions are modulo  $N_{\text{RB}}^{\text{DL}} N_{\text{sc}}^{\text{RB}}$ ,

$$\bar{k} = (N_{\text{sc}}^{\text{RB}} / 2) \cdot (N_{\text{ID}}^{\text{cell}} \bmod 2N_{\text{RB}}^{\text{DL}})$$

and  $N_{\text{ID}}^{\text{cell}}$  is the physical-layer cell identity as given by clause 6.11.

## 6.8 Physical downlink control channel

### 6.8.1 PDCCH formats

The physical downlink control channel carries scheduling assignments and other control information. A physical control channel is transmitted on an aggregation of one or several consecutive control channel elements (CCEs), where a control channel element corresponds to 9 resource element groups. The number of resource-element groups not assigned to PCFICH or PHICH is  $N_{\text{REG}}$ . The CCEs available in the system are numbered from 0 to  $N_{\text{CCE}} - 1$ , where  $N_{\text{CCE}} = \lfloor N_{\text{REG}} / 9 \rfloor$ . The PDCCH supports multiple formats as listed in Table 6.8.1-1 where PDCCH format 4 is supported only for non-MBSFN subframes in an MBMS-dedicated cell. A PDCCH consisting of  $n$  consecutive CCEs may only start on a CCE fulfilling  $i \bmod n = 0$ , where  $i$  is the CCE number.

Multiple PDCCHs can be transmitted in a subframe.

**Table 6.8.1-1: Supported PDCCH formats**

| PDCCH format | Number of CCEs | Number of resource-element groups | Number of PDCCH bits |
|--------------|----------------|-----------------------------------|----------------------|
| 0            | 1              | 9                                 | 72                   |
| 1            | 2              | 18                                | 144                  |
| 2            | 4              | 36                                | 288                  |
| 3            | 8              | 72                                | 576                  |
| 4            | 16             | 144                               | 1152                 |

### 6.8.2 PDCCH multiplexing and scrambling

The block of bits  $b^{(i)}(0), \dots, b^{(i)}(M_{\text{bit}}^{(i)} - 1)$  on each of the control channels to be transmitted in a subframe, where  $M_{\text{bit}}^{(i)}$  is the number of bits in one subframe to be transmitted on physical downlink control channel number  $i$ , shall be multiplexed, resulting in a block of bits

$b^{(0)}(0), \dots, b^{(0)}(M_{\text{bit}}^{(0)} - 1), b^{(1)}(0), \dots, b^{(1)}(M_{\text{bit}}^{(1)} - 1), \dots, b^{(n_{\text{PDCCH}}-1)}(0), \dots, b^{(n_{\text{PDCCH}}-1)}(M_{\text{bit}}^{(n_{\text{PDCCH}}-1)} - 1)$ , where  $n_{\text{PDCCH}}$  is the number of PDCCHs transmitted in the subframe.

The block of bits  $b^{(0)}(0), \dots, b^{(0)}(M_{\text{bit}}^{(0)} - 1), b^{(1)}(0), \dots, b^{(1)}(M_{\text{bit}}^{(1)} - 1), \dots, b^{(n_{\text{PDCCH}}-1)}(0), \dots, b^{(n_{\text{PDCCH}}-1)}(M_{\text{bit}}^{(n_{\text{PDCCH}}-1)} - 1)$  shall be scrambled with a cell-specific sequence prior to modulation, resulting in a block of scrambled bits  $\tilde{b}(0), \dots, \tilde{b}(M_{\text{tot}} - 1)$  according to

$$\tilde{b}(i) = (b(i) + c(i)) \bmod 2$$

where the scrambling sequence  $c(i)$  is given by clause 7.2. The scrambling sequence generator shall be initialised with  $c_{\text{init}} = \lfloor n_s / 2 \rfloor 2^9 + N_{\text{ID}}^{\text{cell}}$  at the start of each subframe.

CCE number  $n$  corresponds to bits  $b(72n), b(72n+1), \dots, b(72n+71)$ . If necessary, <NIL> elements shall be inserted in the block of bits prior to scrambling to ensure that the PDCCHs starts at the CCE positions as described in

TS 36.213 [4] and to ensure that the length  $M_{\text{tot}} = 8N_{\text{REG}} \geq \sum_{i=0}^{n_{\text{PDCCH}}-1} M_{\text{bit}}^{(i)}$  of the scrambled block of bits matches the amount of resource-element groups not assigned to PCFICH or PHICH.

### 6.8.3 Modulation

The block of scrambled bits  $\tilde{b}(0), \dots, \tilde{b}(M_{\text{tot}} - 1)$  shall be modulated as described in clause 7.1, resulting in a block of complex-valued modulation symbols  $d(0), \dots, d(M_{\text{symb}} - 1)$ . Table 6.8.3-1 specifies the modulation mappings applicable for the physical downlink control channel.

**Table 6.8.3-1: PDCCH modulation schemes**

| Physical channel | Modulation schemes |
|------------------|--------------------|
| PDCCH            | QPSK               |

### 6.8.4 Layer mapping and precoding

The block of modulation symbols  $d(0), \dots, d(M_{\text{symb}} - 1)$  shall be mapped to layers according to one of clauses 6.3.3.1 or 6.3.3.3 with  $M_{\text{symb}}^{(0)} = M_{\text{symb}}$  and precoded according to one of clauses 6.3.4.1 or 6.3.4.3, resulting in a block of vectors

$y(i) = [y^{(0)}(i) \ \dots \ y^{(P-1)}(i)]^T$ ,  $i = 0, \dots, M_{\text{symb}} - 1$  to be mapped onto resources on the antenna ports used for transmission, where  $y^{(p)}(i)$  represents the signal for antenna port  $p$ . The PDCCH shall be transmitted on the same set of antenna ports as the PBCH.

### 6.8.5 Mapping to resource elements

The mapping to resource elements is defined by operations on quadruplets of complex-valued symbols. Let  $z^{(p)}(i) = \langle y^{(p)}(4i), y^{(p)}(4i+1), y^{(p)}(4i+2), y^{(p)}(4i+3) \rangle$  denote symbol quadruplet  $i$  for antenna port  $p$ .

The block of quadruplets  $z^{(p)}(0), \dots, z^{(p)}(M_{\text{quad}} - 1)$ , where  $M_{\text{quad}} = M_{\text{symb}} / 4$ , shall be permuted resulting in  $w^{(p)}(0), \dots, w^{(p)}(M_{\text{quad}} - 1)$ . The permutation shall be according to the sub-block interleaver in clause 5.1.4.2.1 of TS 36.212 [3] with the following exceptions:

- the input and output to the interleaver is defined by symbol quadruplets instead of bits

- interleaving is performed on symbol quadruplets instead of bits by substituting the terms "bit", "bits" and "bit sequence" in clause 5.1.4.2.1 of TS 36.212 [3] by "symbol quadruplet", "symbol quadruplets" and "symbol-quadruplet sequence", respectively

<NULL> elements at the output of the interleaver in TS 36.212 [3] shall be removed when forming

$w^{(p)}(0), \dots, w^{(p)}(M_{\text{quad}}-1)$ . Note that the removal of <NULL> elements does not affect any <NIL> elements inserted in clause 6.8.2.

The block of quadruplets  $w^{(p)}(0), \dots, w^{(p)}(M_{\text{quad}}-1)$  shall be cyclically shifted, resulting in

$$\bar{w}^{(p)}(0), \dots, \bar{w}^{(p)}(M_{\text{quad}}-1) \text{ where } \bar{w}^{(p)}(i) = w^{(p)}\left((i + N_{\text{ID}}^{\text{cell}}) \bmod M_{\text{quad}}\right).$$

Mapping of the block of quadruplets  $\bar{w}^{(p)}(0), \dots, \bar{w}^{(p)}(M_{\text{quad}}-1)$  is defined in terms of resource-element groups, specified in clause 6.2.4, according to steps 1–10 below:

- 1) Initialize  $m' = 0$  (resource-element group number)
- 2) Initialize  $k' = 0$
- 3) Initialize  $l' = 0$
- 4) If the resource element  $(k', l')$  represents a resource-element group and the resource-element group is not assigned to PCFICH or PHICH then perform step 5 and 6, else go to step 7
- 5) Map symbol-quadruplet  $\bar{w}^{(p)}(m')$  to the resource-element group represented by  $(k', l')$  for each antenna port  $p$
- 6) Increase  $m'$  by 1
- 7) Increase  $l'$  by 1
- 8) Repeat from step 4 if  $l' < L$ , where  $L$  corresponds to the number of OFDM symbols used for PDCCH transmission. The quantity  $L$  is obtained from
  - the sequence transmitted on the PCFICH, or
  - the higher-layer parameter *cfi-SubframeMBSFN-r15* for DCI formats other than DCI format 7 in a MBSFN subframe, or
  - the higher-layer parameter *cfi-SlotSubslotMBSFN-r15* for DCI format 7 in a MBSFN subframe, or
  - the higher-layer parameter *cfi-SubframeNonMBSFN-r15* for DCI formats other than DCI format 7 in a non-MBSFN subframe, or
  - the higher-layer parameter *cfi-SlotSubslotNonMBSFN-r15* for DCI format 7 in a non-MBSFN subframe, or
  - the higher-layer parameter *cfi-PatternSubframe-r15* for DCI formats other than DCI format 7 in one subframe for frame structure 2, or
  - the higher-layer parameter *cfi-PatternSlotSubslot-r15* for DCI formats 7 in one subframe for frame structure 2.
- 9) Increase  $k'$  by 1
- 10) Repeat from step 3 if  $k' < N_{\text{RB}}^{\text{DL}} \cdot N_{\text{sc}}^{\text{RB}}$

PDCCHs shall not be transmitted in MBSFN subframes with zero-size non-MBSFN region.

## 6.8A Enhanced physical downlink control channel

For frame structure type 3, for a subframe with the same duration as the DwPTS duration of a special subframe configuration, the enhanced physical downlink control channel is defined the same as that for the corresponding special subframe configuration.

### 6.8A.1 EPDCCH formats

The enhanced physical downlink control channel (EPDCCH) carries scheduling assignments. An enhanced physical downlink control channel is transmitted using an aggregation of one or several consecutive enhanced control channel elements (ECCEs) where each ECCE consists of multiple enhanced resource element groups (REGs), defined in clause 6.2.4A. The number of ECCEs used for one EPDCCH depends on the EPDCCH format as given by Table 6.8A.1-2 and the number of REGs per ECCE is given by Table 6.8A.1-1. Both localized and distributed transmission is supported.

An EPDCCH can use either localized or distributed transmission, differing in the mapping of ECCEs to REGs and PRB pairs.

A UE shall monitor multiple EPDCCHs as defined in TS 36.213 [4]. One or two sets of physical resource-block pairs which a UE shall monitor for EPDCCH transmissions can be configured. All EPDCCH candidates in EPDCCH set

$X_m$  use either only localized or only distributed transmission as configured by higher layers. Within EPDCCH set

$X_m$  in subframe  $i$ , the ECCEs available for transmission of EPDCCHs are numbered from 0 to  $N_{ECCE,m,i} - 1$  and ECCE number  $n$  corresponds to

- REGs numbered  $(n \bmod N_{ECCE}^{RB}) + jN_{ECCE}^{RB}$  in PRB index  $\lfloor n / N_{ECCE}^{RB} \rfloor$  for localized mapping, and
- REGs numbered  $\lfloor n / N_{RB}^{X_m} \rfloor + jN_{ECCE}^{RB}$  in PRB indices  $(n + j \max(1, N_{RB}^{X_m} / N_{ECCE}^{REG})) \bmod N_{RB}^{X_m}$  for distributed mapping,

where  $j = 0, 1, \dots, N_{ECCE}^{REG} - 1$ ,  $N_{ECCE}^{REG}$  is the number of REGs per ECCE, and  $N_{ECCE}^{RB} = 16 / N_{ECCE}^{REG}$  is the number of ECCEs per resource-block pair. The physical resource-block pairs constituting EPDCCH set  $X_m$  are in this paragraph assumed to be numbered in ascending order from 0 to  $N_{RB}^{X_m} - 1$ .

**Table 6.8A.1-1: Number of REGs per ECCE,  $N_{ECCE}^{REG}$**

| Normal cyclic prefix |                                         |                                                   | Extended cyclic prefix |                                               |
|----------------------|-----------------------------------------|---------------------------------------------------|------------------------|-----------------------------------------------|
| Normal subframe      | Special subframe, configuration 3, 4, 8 | Special subframe, configuration 1, 2, 6, 7, 9, 10 | Normal subframe        | Special subframe, configuration 1, 2, 3, 5, 6 |
| 4                    |                                         |                                                   | 8                      |                                               |

**Table 6.8A.1-2: Supported EPDCCH formats**

| EPDCCH format | Number of ECCEs for one EPDCCH, $N_{ECCE}^{EPDCCH}$ |                          |                        |                          |
|---------------|-----------------------------------------------------|--------------------------|------------------------|--------------------------|
|               | Case A                                              |                          | Case B                 |                          |
|               | Localized transmission                              | Distributed transmission | Localized transmission | Distributed transmission |
| 0             | 2                                                   | 2                        | 1                      | 1                        |
| 1             | 4                                                   | 4                        | 2                      | 2                        |
| 2             | 8                                                   | 8                        | 4                      | 4                        |
| 3             | 16                                                  | 16                       | 8                      | 8                        |
| 4             | -                                                   | 32                       | -                      | 16                       |

Case A in Table 6.8A.1-2 is used when the conditions corresponding to case 1 in clause 9.1.4 of TS 36.213 [4] are satisfied, otherwise case B is used. The quantity  $n_{EPDCCH}$  for a particular UE and referenced in TS 36.213 [4] is defined

as the number of downlink resource elements  $(k,l)$  available for EPDCCH transmission in a physical resource-block pair configured for possible EPDCCH transmission of EPDCCH set  $X_0$  and fulfilling all of the following criteria:

- they are part of any one of the 16 EREGs in the physical resource-block pair, and
- they are assumed by the UE not to be used for cell-specific reference signals, where the positions of the cell-specific reference signals are given by clause 6.10.1.2 with the number of antenna ports for and the frequency shift of cell-specific reference signals derived as described in clause 6.10.1.2 unless other values for these parameters are provided by clause 9.1.4.3 in TS 36.213 [4], and-
- they are assumed by the UE not to be used for transmission of CSI reference signals, where the positions of the CSI reference signals are given by clause 6.10.5.2 with the configuration for zero power CSI reference signals obtained as described in clause 6.10.5.2 unless other values are provided by clause 9.1.4.3 in TS 36.213 [4], and with the configuration for non-zero power CSI reference signals obtained as described in clause 6.10.5.2, and
- for frame structure type 1 and 2, the index  $l$  in the first slot in a subframe fulfils  $l \geq l_{\text{EPDCCHStart}}$  where  $l_{\text{EPDCCHStart}}$  is given by clause 9.1.4.1 of TS 36.213 [4], and
- for frame structure type 3,
  - if the higher layer parameter *subframeStartPosition* indicates 's07' and if the downlink transmission starts in the second slot of a subframe
    - the index  $l$  in the second slot in the subframe fulfils  $l \geq l_{\text{EPDCCHStart}}$  where  $l_{\text{EPDCCHStart}}$  is given by clause 9.1.4.1 of TS 36.213 [4],
  - otherwise
    - the index  $l$  in the first slot in the subframe fulfils  $l \geq l_{\text{EPDCCHStart}}$  where  $l_{\text{EPDCCHStart}}$  is given by clause 9.1.4.1 of TS 36.213 [4].

## 6.8A.2 Scrambling

The block of bits  $b(0), \dots, b(M_{\text{bit}} - 1)$  to be transmitted on an EPDCCH in a subframe shall be scrambled, resulting in a block of scrambled bits  $\tilde{b}(0), \dots, \tilde{b}(M_{\text{bit}} - 1)$  according to

$$\tilde{b}(i) = (b(i) + c(i)) \bmod 2$$

where the UE-specific scrambling sequence  $c(i)$  is given by clause 7.2. The scrambling sequence generator shall be initialized with  $c_{\text{init}} = \lfloor n_s/2 \rfloor \cdot 2^9 + n_{\text{ID},m}^{\text{EPDCCH}}$  where  $m$  is the EPDCCH set number.

## 6.8A.3 Modulation

The block of scrambled bits  $\tilde{b}(0), \dots, \tilde{b}(M_{\text{bit}} - 1)$  shall be modulated as described in clause 7.1, resulting in a block of complex-valued modulation symbols  $d(0), \dots, d(M_{\text{synd}} - 1)$ . Table 6.8A.3-1 specifies the modulation mappings applicable for the enhanced physical downlink control channel.

**Table 6.8A.3-1: EPDCCH modulation schemes**

| Physical channel | Modulation schemes |
|------------------|--------------------|
| EPDCCH           | QPSK               |

## 6.8A.4 Layer mapping and precoding

The block of complex-valued modulation symbols shall be mapped to a single layer and precoded according to 6.3.4.1

as for  $y(i) = d(i)$ ,  $i = 0, \dots, M_{\text{symb}} - 1$ .

## 6.8A.5 Mapping to resource elements

The block of complex-valued symbols  $y(0), \dots, y(M_{\text{symb}} - 1)$  shall be mapped in sequence starting with  $y(0)$  to resource elements  $(k, l)$  on the associated antenna port which meet all of the following criteria:

- they are part of the EREGs assigned for the EPDCCH transmission, and
- they are assumed by the UE not to be used for cell-specific reference signals, where the positions of the cell-specific reference signals are given by clause 6.10.1.2 with the number of antenna ports for and the frequency shift of cell-specific reference signals derived as described in clause 6.10.1.2 unless other values for these parameters are provided by clause 9.1.4.3 in TS 36.213 [4], and
- they are assumed by the UE not to be used for transmission of:
  - zero-power CSI reference signals, where the positions of the CSI reference signals are given by clause 6.10.5.2. The configuration for zero power CSI reference signals is
    - obtained as described in clause 6.10.5.2 unless other values are provided by clause 9.1.4.3 in TS 36.213 [4], and
    - obtained by higher-layer configuration of up to five reserved CSI-RS resources as part of the discovery signal configuration following the procedure for zero-power CSI-RS in clause 6.10.5.2.
  - non-zero-power CSI reference signals for CSI reporting, except for non-zero power CSI reference signals configured by *csi-RS-ConfigNZP-ApList*, with the configuration for non-zero power CSI reference signals for CSI reporting obtained as described in clause 6.10.5.2, and
- for frame structure type 1 and 2, the index  $l$  in the first slot in a subframe fulfils  $l \geq l_{\text{EPDCCHStart}}$  where  $l_{\text{EPDCCHStart}}$  is given by clause 9.1.4.1 of TS 36.213 [4], and
- for frame structure type 3,
  - if the higher layer parameter *subframeStartPosition* indicates 's07' and if the downlink transmission starts in the second slot of a subframe
    - the index  $l$  in the second slot in the subframe fulfils  $l \geq l_{\text{EPDCCHStart}}$  where  $l_{\text{EPDCCHStart}}$  is given by clause 9.1.4.1 of TS 36.213 [4],
  - otherwise
    - the index  $l$  in the first slot in the subframe fulfils  $l \geq l_{\text{EPDCCHStart}}$  where  $l_{\text{EPDCCHStart}}$  is given by clause 9.1.4.1 of TS 36.213 [4].

The mapping to resource elements  $(k, l)$  on antenna port  $p$  meeting the criteria above shall be in increasing order of first the index  $k$  and then the index  $l$ , starting with the first slot and ending with the second slot in a subframe.

For localized transmission, the single antenna port  $p$  to use is given by Table 6.8A.5-1 with

$$n' = n_{\text{ECCE}, \text{low}} \bmod N_{\text{ECCE}}^{\text{RB}} + n_{\text{RNTI}} \bmod \min(N_{\text{ECCE}}^{\text{EPDCCH}}, N_{\text{ECCE}}^{\text{RB}})$$

where  $n_{\text{ECCE}, \text{low}}$  is the lowest ECCE index used by this EPDCCH transmission in the EPDCCH set,  $n_{\text{RNTI}}$  equals the C-RNTI, and  $N_{\text{ECCE}}^{\text{EPDCCH}}$  is the number of ECCEs used for this EPDCCH.

**Table 6.8A.5-1: Antenna port to use for localized EPDCCH transmission**

|  | Normal cyclic prefix | Extended cyclic prefix |
|--|----------------------|------------------------|
|--|----------------------|------------------------|

| $n'$ | Normal subframes,<br>Special subframes,<br>configurations 3, 4, 8 | Special subframes,<br>configurations 1, 2, 6, 7, 9, 10 | Any subframe |
|------|-------------------------------------------------------------------|--------------------------------------------------------|--------------|
| 0    | 107                                                               | 107                                                    | 107          |
| 1    | 108                                                               | 109                                                    | 108          |
| 2    | 109                                                               | -                                                      | -            |
| 3    | 110                                                               | -                                                      | -            |

For distributed transmission, each resource element in an EREG is associated with one out of two antenna ports in an alternating manner, starting with antenna port 107, where  $p \in \{107, 109\}$  for normal cyclic prefix and  $p \in \{107, 108\}$  for extended cyclic prefix.

## 6.8B MTC physical downlink control channel

### 6.8B.1 MPDCCH formats

The MPDCCH formats are defined as in Clause 6.8A.1 with the following exceptions:

- The term EPDCCH is replaced by MPDCCH.
- The MTC physical downlink control channel carries downlink control information and is transmitted across  $N_{\text{rep}}^{\text{MPDCCH}} \geq 1$  consecutive BL/CE DL subframes. Within each of the  $N_{\text{rep}}^{\text{MPDCCH}}$  BL/CE DL subframes an MPDCCH is transmitted using an aggregation of one or several consecutive enhanced control channel elements (ECCEs) where each ECCE consists of multiple enhanced resource element groups (EREGs), defined in clause 6.2.4A.
- For frame structure type 2,
  - If repetition is not configured for the MPDCCH, the number of EREGs per ECCE is given by Table 6.8A.1-1. If repetition is configured for the MPDCCH, the number of EREGs per ECCE is given by Table 6.8B.1-1.
  - For those special subframes where the MPDCCH is not supported, these special subframes are considered BL/CE DL subframes for both MPDCCH and PDSCH transmission, only if they are indicated as BL/CE DL subframe by higher layer signalling.
- For an MPDCCH associated with 2 or 4 PRBs, if repetition is not configured for the MPDCCH, the supported MPDCCH formats are given by Table 6.8A.1-2. Otherwise, the supported MPDCCH formats are given by Table 6.8B.1-2. However, for MPDCCH format 5, the equation defining the relation between ECCE index and EREG index does not apply and the number of ECCEs refers to the MPDCCH mapping to the REs of the 2+4 PRB set as defined in Clause 6.8B.5.

**Table 6.8B.1-1: Number of EREGs per ECCE,  $N_{\text{EREG}}^{\text{ECCE}}$  for frame structure type 2.**

| Normal cyclic prefix |                                            | Extended cyclic prefix |                                                     |
|----------------------|--------------------------------------------|------------------------|-----------------------------------------------------|
| Normal subframe      | Special subframe,<br>configuration 3, 4, 8 | Normal subframe        | Special subframe,<br>configuration 1, 2, 3, 5,<br>6 |
| 4                    |                                            | 8                      |                                                     |

**Table 6.8B.1-2: Supported MPDCCH formats**

| MPDCCH<br>format | Number of ECCEs in a subframe for one MPDCCH, $N_{\text{ECCE}}^{\text{MPDCCH}}$ |                             |                                   |                             |
|------------------|---------------------------------------------------------------------------------|-----------------------------|-----------------------------------|-----------------------------|
|                  | $N_{\text{EREG}}^{\text{ECCE}}=4$                                               |                             | $N_{\text{EREG}}^{\text{ECCE}}=8$ |                             |
|                  | Localized<br>transmission                                                       | Distributed<br>transmission | Localized<br>transmission         | Distributed<br>transmission |
| 0                | 2                                                                               | 2                           | 1                                 | 1                           |
| 1                | 4                                                                               | 4                           | 2                                 | 2                           |
| 2                | 8                                                                               | 8                           | 4                                 | 4                           |

|   |    |    |    |    |
|---|----|----|----|----|
| 3 | 16 | 16 | 8  | 8  |
| 4 | -  | -  | -  | -  |
| 5 | 24 | 24 | 12 | 12 |

## 6.8B.2 Scrambling

Scrambling shall be performed according to Clause 6.8A.2 with EPDCCH replaced by MPDCCH except that the same scrambling sequence is applied per subframe to MPDCCH for a given block of  $N_{\text{acc}}$  subframes and  $m$  is the MPDCCH set number. For an MPDCCH associated with a 2+4 PRB set as defined in [4],  $m=0$  is used to generate the scrambling sequence for mapping to REs in 6 PRBs as well as 2 PRBs and 4 PRBs.

The subframe number of the first subframe in each block of  $N_{\text{acc}}$  consecutive subframes, denoted as  $n_{\text{abs},1}$ , satisfies  $(n_{\text{abs},1} + i_{\Delta}) \bmod N_{\text{acc}} = 0$ . For the  $j^{\text{th}}$  block of  $N_{\text{acc}}$  subframes, the scrambling sequence generator shall be initialised with

$$c_{\text{init}} = \begin{cases} [(j_0 + j)N_{\text{acc}} \bmod 10] \cdot 2^9 + N_{\text{ID}}^{\text{cell}} & \text{for Type1 - Common, Type2 - common} \\ [(j_0 + j)N_{\text{acc}} \bmod 10] \cdot 2^9 + n_{\text{ID},m}^{\text{MPDCCH}} & \text{otherwise} \end{cases}$$

where

$$\begin{aligned} j &= 0, 1, \dots, \left\lfloor \frac{i_0 + N_{\text{abs}}^{\text{MPDCCH}} + i_{\Delta} - 1}{N_{\text{acc}}} \right\rfloor - j_0 \\ j_0 &= \lfloor (i_0 + i_{\Delta}) / N_{\text{acc}} \rfloor \\ i_{\Delta} &= \begin{cases} 0, & \text{for frame structure type 1 or } N_{\text{acc}} = 1 \\ N_{\text{acc}} - 2, & \text{for frame structure type 2 and } N_{\text{acc}} = 10 \end{cases} \end{aligned}$$

and  $i_0$  is the absolute subframe number of the first downlink subframe intended for the MPDCCH. The MPDCCH transmission spans  $N_{\text{abs}}^{\text{MPDCCH}}$  consecutive subframes, including subframes that are not BL/CE DL subframes where the MPDCCH transmission is postponed.

For BL/CE UEs,

- if the MPDCCH transmission is associated with P-RNTI or SC-RNTI:
  - $N_{\text{acc}} = 4$  for frame structure type 1 and  $N_{\text{acc}} = 10$  for frame structure type 2
- otherwise
  - $N_{\text{acc}} = 1$  for UEs assuming CEModeA (according to the definition in Clause 12 of [4]) or configured with CEModeA;
  - $N_{\text{acc}} = 4$  for frame structure type 1 and  $N_{\text{acc}} = 10$  for frame structure type 2 for UEs assuming CEModeB (according to the definition in Clause 12 of [4]) or configured with CEModeB.

## 6.8B.3 Modulation

Modulation shall be performed according to 6.8A.3 with EPDCCH replaced by MPDCCH.

## 6.8B.4 Layer mapping and precoding

Layer mapping and precoding shall be done according to Clause 6.8A.4 with EPDCCH replaced by MPDCCH.

## 6.8B.5 Mapping to resource elements

Mapping to resource elements shall be done according to Clause 6.8A.5 with the following exceptions:

- The term EPDCCH shall be replaced by MPDCCH.
- The mapping shall be repeated across each of the  $N_{\text{rep}}^{\text{MPDCCH}}$  BL/CE DL subframes.
- $N_{\text{ECCE}}^{\text{MPDCCH}}$  is the number of ECCEs used for this MPDCCH in the first of the  $N_{\text{rep}}^{\text{MPDCCH}}$  subframes.
- For an MPDCCH associated with a 2+4 PRB set as defined in [4], the mapping to resource elements  $(k, l)$  on antenna port  $p$  shall be in increasing order of first the index  $k$  and then the index  $l$  over the 6 PRBs for MPDCCH format 5 and over the 2 or 4 PRBs for the other MPDCCH formats.
- For localized transmission and MPDCCH format 5, the single antenna port  $p$  to use is given by Table 6.8A.5-1 with

$$n' = n_{\text{RNTI}} \bmod N_{\text{ECCE}}^{\text{RB}}$$

where  $n_{\text{RNTI}}$  equals the C-RNTI.

- Resource elements occupied by CSI reference signals shall be counted in the MPDCCH mapping but not used for transmission of the MPDCCH.
- PRB pairs occupied by RSS shall be counted in the MPDCCH mapping but not used for transmission of the MPDCCH.
- Resource elements belonging to PRBs in which PRS is transmitted (including PRS muted subframes) shall be counted in the MPDCCH mapping but not used for transmission of the MPDCCH.
- A BL/CE UE not configured with higher layer parameter *ce-pdsch-maxBandwidth-config* and not configured with higher layer parameter *ce-PDSCH-FlexibleStartPRB-AllocConfig* may assume there is no MPDCCH transmission which uses overlapping sets of subframes as PDSCH transmissions to that UE, where the MPDCCH is located at a different narrowband than the PDSCH.
- A BL/CE UE configured with higher layer parameter *ce-pdsch-maxBandwidth-config* may assume that there is no MPDCCH transmission which uses overlapping sets of subframes as PDSCH transmissions to that UE, where the MPDCCH transmission and PDSCH transmission in any of the overlapping subframes span a PRB region larger than  $X$  contiguous PRBs where  $X=25$  if *ce-pdsch-maxBandwidth-config* is set to 5 MHz and  $X=100$  if *ce-pdsch-maxBandwidth-config* is set to 20 MHz.
- A BL/CE UE configured with higher layer parameter *ce-PDSCH-FlexibleStartPRB-AllocConfig* may assume there is no MPDCCH transmission in MPDCCH candidates not fully contained within the tuning narrowband defined for PDSCH in Clause 6.2.8.
- For BL/CE UEs in CEModeB, in MBSFN subframe(s), resource elements that correspond to the positions of cell-specific reference signals as in subframe #0 shall not be counted in the MPDCCH mapping and not used for transmission of the MPDCCH.
- Resource elements belonging to synchronization signals, the core part of PBCH, PBCH repetitions, or resource elements reserved for reference signals in the mapping operation of PBCH but not used for transmission of reference signals, shall be counted in the MPDCCH mapping but not used for transmission of the MPDCCH.
- If MPDCCH transmission in the LTE control region is configured by the higher layer parameter *transmissionInControlChRegion*,
  - For frame structure type 1 and frame structure type 2 except special subframe configuration 9 or 10,
    - Symbols used for transmission of MPDCCH or demodulation signals associated with MPDCCH and mapped to resource element  $(k, l)$  in the second slot, where  $l \in \{0..l_{\text{MPDCCHStart}} - 1\}$ , shall additionally be mapped to resource element  $(k, l)$  in the first slot.
  - For frame structure type 2 and special subframe configuration 9 or 10,
    - Symbols used for transmission of MPDCCH or demodulation signals associated with MPDCCH and mapped to resource element  $(k, l + 4)$  in the first slot, where  $l \in \{0..l_{\text{MPDCCHStart}} - 1\}$ , shall additionally

be mapped to resource element  $(k, l)$  in the first slot, if resource element  $(k, l)$  in the first slot is not used for cell-specific reference signals.

- In the subframes where an MPDCCH or its associated PDSCH is transmitted in response to a physical random access transmission initiated by a PDCCH order, the UE shall receive the MPDCCH or its associated PDSCH, and assume no other UE-specific reception is needed.
- For MPDCCH transmission associated with C-RNTI or TPC-PUCCH-RNTI or TPC-PUSCH-RNTI or SPS C-RNTI that are not configured to use the Type2-MPDCCH common search space, frequency hopping of the MPDCCH is enabled when higher layer parameter *mpdcch-pdsch-HoppingConfig* is set.
- For MPDCCH transmission associated with PUR-RNTI using UE-specific MPDCCH search space, frequency hopping of the MPDCCH is enabled when *mpdcch-FreqHopping* in higher layer parameter *PUR-MPDCCH-Config* is set.
- For MPDCCH transmission associated with Type2-MPDCCH common search space, frequency hopping of the MPDCCH is enabled when higher layer parameter *rar-HoppingConfig* is set. Further
  - if PRACH CE level 0 or 1 is used for the last PRACH attempt,  $N_{NB}^{ch, DL}$  is set to the higher layer parameter *interval-DIHoppingConfigCommonModeA*;
  - if PRACH CE level 2 or 3 is used for the last PRACH attempt,  $N_{NB}^{ch, DL}$  is set to the higher layer parameter *interval-DIHoppingConfigCommonModeB*.
- For MPDCCH transmission associated with SC-RNTI, frequency hopping of the MPDCCH is enabled when higher layer parameter *mpdcch-pdsch-HoppingConfig-SC-MCCH* is set. Further
  - if *mpdcch-pdsch-HoppingConfig-SC-MCCH* is set to CEModeA,  $N_{NB}^{ch, DL}$  is set to the higher layer parameter *interval-DIHoppingConfigCommonModeA*;
  - if *mpdcch-pdsch-HoppingConfig-SC-MCCH* is set to CEModeB,  $N_{NB}^{ch, DL}$  is set to the higher layer parameter *interval-DIHoppingConfigCommonModeB*.
- For MPDCCH transmission associated with G-RNTI, frequency hopping of the MPDCCH is enabled when higher layer parameter *mpdcch-pdsch-HoppingConfig-SC-MTCH* is set. Further
  - if *mpdcch-pdsch-CEmodeConfig-SC-MTCH* is set to CEModeA,  $N_{NB}^{ch, DL}$  is set to the higher layer parameter *interval-DIHoppingConfigCommonModeA*;
  - if *mpdcch-pdsch-CEmodeConfig-SC-MTCH* is set to CEModeB,  $N_{NB}^{ch, DL}$  is set to the higher layer parameter *interval-DIHoppingConfigCommonModeB*.
- The narrowband  $n_{NB}^{(i_{0,ss})}$  for MPDCCH transmission in the first subframe of MPDCCH search space is provided by higher layers. Starting subframe configuration of a search space where UE monitors an MPDCCH is also provided by higher layers. The MPDCCH search space uses  $N_{repss}^{MPDCCH} \geq 1$  subframes, spanning  $N_{abss}^{MPDCCH} \geq N_{repss}^{MPDCCH}$  consecutive subframes, including subframes that are not BL/CE DL subframes where the MPDCCH transmission is postponed.
  - If downlink resource reservation is enabled for the UE as specified in [9], then in case of MPDCCH transmission associated with C-RNTI or SPS C-RNTI using UE-specific MPDCCH search space,
    - In a subframe that is fully reserved as defined in clause 7.1 in [4], the MPDCCH transmission is postponed until the next BL/CE downlink subframe that is not fully reserved.
    - In a subframe that is partially reserved, the reserved resource elements shall be counted in the MPDCCH mapping but not used for transmission of the MPDCCH.
  - If frequency hopping is not enabled for MPDCCH, the repetitions of an MPDCCH candidate are located at the same PRB resources in the same narrowband  $n_{NB}^{(i_{0,ss})}$ , and

- if frequency hopping is enabled for MPDCCH, an MPDCCH candidate shall be transmitted in absolute subframe  $i$  using the same PRB resources within each narrowband  $n_{NB}^{(i)}$

$$n_{NB}^{(i)} = \left( n_{NB}^{(i_{0,ss})} + \left( \left\lfloor \frac{i + i_{\Delta}}{N_{NB}^{ch,DL}} - j_0 \right\rfloor \bmod N_{NB,hop}^{ch,DL} \right) \cdot f_{NB,hop}^{DL} \right) \bmod N_{NB}^{DL}$$

$$j_0 = \left\lfloor (i_{0,ss} + i_{\Delta}) / N_{NB}^{ch,DL} \right\rfloor$$

$$i_{0,ss} \leq i \leq i_{0,ss} + N_{abs,ss}^{MPDCCH} - 1$$

$$i_{\Delta} = \begin{cases} 0, & \text{for frame structure type 1} \\ N_{NB}^{ch,DL} - 2, & \text{for frame structure type 2} \end{cases}$$

where  $i_{0,ss}$  is the absolute subframe number of the first downlink subframe of MPDCCH search space, and  $N_{NB,hop}^{ch,DL}$ ,  $N_{NB}^{ch,DL}$  and  $f_{NB,hop}^{DL}$  are cell-specific higher-layer parameters. The UE shall not expect MPDCCH transmission in absolute subframe  $i$  if it is not a BL/CE DL subframe.

- The UE may assume the same precoding matrix being used for a PRB across a block of  $N_{NB}^{ch,DL}$  consecutive subframes for MPDCCH, where the subframe number of the first subframe in each block of  $N_{NB}^{ch,DL}$  consecutive subframes, denoted as  $n_{abs,1}$  satisfies  $(n_{abs,1} + i_{\Delta}) \bmod N_{NB}^{ch,DL} = 0$ .
- If *crs-ChEstMPDCCH-ConfigCommon* or *crs-ChEstMPDCCH-ConfigDedicated* is configured by higher layers, the relation between the MPDCCH and CRS antenna ports is defined as follows:
  - When one CRS port is configured by the eNB, the antenna port(s) used for MPDCCH transmission are equivalent to CRS port 0.
  - For distributed transmission and when two CRS ports are configured by the eNB, the relation between the symbols transmitted on the antenna ports used for MPDCCH transmission and CRS ports 0 – 1 is defined by the precoder matrix for single-layer transmission in Table 6.3.4.2.3-1 using codebook index 0 for antenna port 107 and codebook index 1 for antenna port 109.
  - For distributed transmission and when four CRS ports are configured by the eNB, in absolute subframe  $n_{abs}$  and resource block index  $n_{PRB}$  within one or two MPDCCH PRB sets where UE monitors an MPDCCH, the relation between the symbols transmitted on the antenna ports used for MPDCCH transmission and CRS ports 0 – 3 is defined by the precoder matrix for single-layer transmission in Table 6.3.4.2.3-2 using codebook index  $i$  for antenna port 107 and codebook index  $i + 1$  for antenna port 109, where

$$i = 12 + 2 \left( \left( \left\lfloor \frac{n_{abs} + i_{\Delta}}{N_{NB}^{ch,DL}} \right\rfloor + n_{PRB} \right) \bmod 2 \right)$$

- For localized transmission, when two CRS ports are configured by the eNB and predefined mapping type is used, in absolute subframe  $n_{abs}$  and resource block index  $n_{PRB}$  within one or two MPDCCH PRB sets where UE monitors an MPDCCH, the relation between the symbols transmitted on the antenna port used for MPDCCH transmission and CRS ports 0 – 1 is defined by the precoder matrix for single-layer transmission in Table 6.3.4.2.3-1, with codebook index  $i$ , where

$$i = \left( \left\lfloor \frac{n_{abs} + i_{\Delta}}{N_{NB}^{ch,DL}} \right\rfloor + n_{PRB} \right) \bmod 2$$

- For localized transmission, when four CRS ports are configured by the eNB and predefined mapping type is used, in absolute subframe  $n_{abs}$  and resource block index  $n_{PRB}$  within one or two MPDCCH PRB sets where UE monitors an MPDCCH, the relation between the symbols transmitted on the antenna port used for MPDCCH transmission and CRS ports 0 – 3 is given by the precoder matrix for single-layer transmission in Table 6.3.4.2.3-2 using codebook index  $i$  where

$$i = 12 + \left( \left( \left\lfloor \frac{n_{\text{abs}} + i_{\Delta}}{n_{\text{NB}}^{\text{ch,DL}}} \right\rfloor + \Delta_{\text{PRB}}(n_{\text{PRB}} \bmod 4) \right) \bmod 4 \right)$$

$$[\Delta_{\text{PRB}}(0) \ \Delta_{\text{PRB}}(1) \ \Delta_{\text{PRB}}(2) \ \Delta_{\text{PRB}}(3)] = [0 \ 2 \ 1 \ 3]$$

- For localized transmission and when CSI-based or reciprocity-based mapping type is used, the relation between the symbols transmitted on the antenna port used for MPDCCH transmission and the CRS ports is given in [4]. When it is indicated in [4] that the antenna port is changed for an MPDCCH candidate with aggregation level 2, the antenna port shall be replaced by the antenna port determined for an MPDCCH candidate with aggregation level 4 in the same search space.
- NOTE:  $n_{\text{PRB}} = 0, \dots, K - 1$ , with  $K = 6$  for  $N_{\text{RB}}^{\text{'Xp}} = 2 + 4$ , and  $K = N_{\text{RB}}^{\text{'Xp}}$  otherwise, where the ordering of PRBs within the PRB set(s) is in increasing order of PRB index.

The UE may assume that an MPDCCH associated with the P-RNTI is transmitted on the set  $\{s_j\}$  of narrowbands where  $\{s_j\}$  is defined in Clause 6.4.1. For a UE monitoring an MPDCCH associated with the P-RNTI, the first MPDCCH narrowband is given by  $s_m$  where  $m = (\tilde{N}_{\text{NB}}^{\text{p}} + N_{\text{ID}}^{\text{cell}}) \bmod N_{\text{NB}}^{\text{S}}$ ,  $\tilde{N}_{\text{NB}}^{\text{p}} \in \{0, 1, \dots, N_{\text{NB}}^{\text{p}} - 1\}$  is the Paging Narrowband (PN) obtained according to [10], and  $N_{\text{NB}}^{\text{p}}$  is the higher-layer parameter *paging-narrowBands*.

- If the higher-layer parameter *si-HoppingConfigCommon* disables frequency hopping for an MPDCCH associated with P-RNTI, each MPDCCH candidate shall be located in the same PRB in narrowband  $s_m$  where  $m = (\tilde{N}_{\text{NB}}^{\text{p}} + N_{\text{ID}}^{\text{cell}}) \bmod N_{\text{NB}}^{\text{S}}$ .
- If the higher-layer parameter *si-HoppingConfigCommon* enables frequency hopping for an MPDCCH with P-RNTI, an MPDCCH candidate shall be located in narrowband  $s_j$  in absolute subframe  $i$  using the same PRB resources within each narrowband  $s_j$  where

$$j = \left( (\tilde{N}_{\text{NB}}^{\text{p}} + N_{\text{ID}}^{\text{cell}}) + \left( \left\lfloor \frac{i + i_{\Delta}}{N_{\text{NB}}^{\text{ch,DL}}} - j_0 \right\rfloor \bmod N_{\text{NB,hop}}^{\text{ch,DL}} \right) \cdot f_{\text{NB,hop}}^{\text{DL}} \right) \bmod N_{\text{NB}}^{\text{S}}$$

$$j_0 = \left\lfloor (i_{0,\text{ss}} + i_{\Delta}) / N_{\text{NB}}^{\text{ch,DL}} \right\rfloor$$

$$i_{0,\text{ss}} \leq i \leq i_{0,\text{ss}} + N_{\text{abs,ss}}^{\text{MPDCCH}} - 1$$

$$i_{\Delta} = \begin{cases} 0, & \text{for frame structure type 1} \\ N_{\text{NB}}^{\text{ch,DL}} - 2, & \text{for frame structure type 2} \end{cases}$$

where  $i_{0,\text{ss}}$  is the absolute subframe number of the first downlink subframe of MPDCCH search space

according to locations of paging opportunity subframes, and  $N_{\text{NB,hop}}^{\text{ch,DL}}$ ,  $N_{\text{NB}}^{\text{ch,DL}}$  and  $f_{\text{NB,hop}}^{\text{DL}}$  are cell-specific higher-layer parameters. For MPDCCH associated with P-RNTI, if *interval-DIHoppingConfigCommonModeB* is signalled in SIB1-BR, then the frequency hopping granularity  $N_{\text{NB}}^{\text{ch,DL}}$  is set to *interval-DIHoppingConfigCommonModeB*; otherwise,  $N_{\text{NB}}^{\text{ch,DL}}$  is set to *interval-DIHoppingConfigCommonModeA* signalled in SIB1-BR.

The UE shall not expect MPDCCH transmission in absolute subframe  $i$  if it is not a BL/CE DL subframe.

## 6.8C Short physical downlink control channel (SPDCCH)

### 6.8C.1 SPDCCH formats

The short physical downlink control channel (SPDCCH) carries scheduling assignments and other control information for subslot PDSCH, slot-PDSCH, subslot-PUSCH, and slot-PUSCH. A SPDCCH is transmitted using an aggregation of

one or several consecutive short control channel elements (SCCEs) where each SCCE consists of multiple short resource element groups (SREGs), defined in clause 6.2.4B. The number of resource elements used for one SPDCCH depends on the SPDCCH format as given by Table 6.8C.1-2 and the number of SREGs per SCCE is given by Table 6.8C.1-1.

**Table 6.8C.1-1: Number of SREGs per SCCE,  $N_{\text{SREG}}^{\text{SCCE}}$**

|                                               | $N_{\text{SREG}}^{\text{SCCE}}$                                              |
|-----------------------------------------------|------------------------------------------------------------------------------|
| CRS based SPDCCH                              | 4                                                                            |
| DMRS based SPDCCH                             | 4 for a 2-symbol SPDCCH <sup>1</sup><br>6 for a 3-symbol SPDCCH <sup>1</sup> |
| NOTE 1: see table 6.8C.5-1 and table 6.8C.5-2 |                                                                              |

**Table 6.8C.1-2: Supported SPDCCH formats**

| SPDCCH format | Number of SCCEs for one SPDCCH, $N_{\text{SCCE}}^{\text{SPDCCH}}$ |
|---------------|-------------------------------------------------------------------|
| 0             | 1                                                                 |
| 1             | 2                                                                 |
| 2             | 4                                                                 |
| 3             | 8                                                                 |

A UE shall monitor multiple SPDCCHs as defined in TS 36.213 [4]. One or two resource sets which a UE shall monitor for SPDCCH transmissions in a slot/subslot can be configured. The SPDCCH can use either localized or distributed transmission. All SPDCCH candidates in SPDCCH set  $X_m$  use either only localized or only distributed transmission as configured by higher layers (see *transmissionType* in TS 36.331 [9]). Similarly, all SPDCCH candidates in SPDCCH set  $X_m$  use either only CRS-based demodulation or only DMRS-based demodulation as configured by higher layers (see *spdcch-SetReferenceSig* in TS 36.331 [9]). For a resource set with CRS-based SPDCCH, the distributed transmission is implemented at the SREG level, i.e. in the SCCE-to-SREG mapping. For a resource set with DMRS-based SPDCCH, the distributed transmission is implemented at the SCCE level, i.e. in the SPDCCH candidate-to-SCCE mapping.

The number of OFDM symbols spanned by a SPDCCH resource set  $X_m$  configured with CRS based demodulation can be configured to be one or two.

For slot based transmission, the number of OFDM symbols spanned by each SPDCCH candidate of a resource set  $X_m$  configured with DMRS-based demodulation is fixed to 2. For subslot based transmission, the number of OFDM symbols spanned by each SPDCCH candidate of a resource set  $X_m$  configured with DMRS-based demodulation is equal to the number of OFDM symbols used for the subslot based PDSCH transmission (which depends on the starting symbol index, as specified in Table 6.4.2-1).

The physical resource blocks in frequency domain constituting SPDCCH set  $X_m$  are in this paragraph assumed to be numbered in ascending order from 0 to  $N_{\text{RB}}^{X_m} - 1$ . For a CRS-based SPDCCH, SREGs within an SPDCCH set  $x_m$  are numbered in a frequency-first time-second manner from 0 to  $N_{\text{os}}^{X_m} N_{\text{RB}}^{X_m} - 1$ , where  $N_{\text{os}}^{X_m}$  is the number of configured OFDM symbols (OS). The frequency-first, time-second mapping of the SREGs within a SPDCCH set is performed from the lowest resource block in frequency domain to the highest resource blocks in frequency domain for the first symbol, and from the highest resource block in frequency domain to the lowest resource block in frequency domain for the second symbol. For a DMRS-based SPDCCH, SREGs within an SPDCCH set  $x_m$  are numbered in a time-first frequency-second manner from 0 to  $N_{\text{os}}^{X_m} N_{\text{RB}}^{X_m} - 1$ .

Within CRS-based SPDCCH set  $X_m$ , the SCCEs available for transmission of SPDCCHs are numbered from 0 to

$N_{SCCE,m} - 1$  where  $N_{SCCE,m} = \left\lfloor N_{OS}^{X_m} N_{RB}^{X_m} / N_{SREG}^{SCCE} \right\rfloor$  for localized mapping and  $N_{SCCE,m} = N_{OS}^{X_m} \left\lfloor N_{RB}^{X_m} / N_{SREG}^{SCCE} \right\rfloor$  for distributed mapping. Within DMRS-based SPDCCH set  $X_m$ , the SCCEs available for transmission of SPDCCHs are numbered from 0 to  $N_{SCCE,m} - 1$  where  $N_{SCCE,m} = \left\lfloor N_{OS}^{X_m} N_{RB}^{X_m} / N_{SREG}^{SCCE} \right\rfloor$ . The SCCE number  $n$  corresponds

- SREGs numbered  $n \cdot N_{SREG}^{SCCE} + j$  for localized SPDCCH mapping with CRS and DMRS based demodulation and for distributed SPDCCH mapping with DMRS-based demodulation

- SREGs numbered  $n \bmod \left\lfloor \frac{N_{RB}^{X_m}}{N_{SREG}^{SCCE}} \right\rfloor + \left\lfloor \frac{n}{\left\lfloor \frac{N_{RB}^{X_m}}{N_{SREG}^{SCCE}} \right\rfloor} \right\rfloor \cdot N_{RB}^{X_m} + j \cdot \left\lfloor \frac{N_{RB}^{X_m}}{N_{SREG}^{SCCE}} \right\rfloor$  for distributed SPDCCH mapping with CRS-

based demodulation.

where  $j = 0, \dots, N_{SREG}^{SCCE} - 1$  and  $N_{SREG}^{SCCE}$  is the number of SREGs per SCCE.

NOTE:  $N_{RB}^{X_m}$  represents the number of SREGs per each configured OFDM symbol in the SPDCCH resource set  $X_m$  and  $N_{OS}^{X_m} N_{RB}^{X_m}$  is the total number of SREGs in SPDCCH resource set  $X_m$ .

## 6.8C.2 Scrambling

The block of bits  $b(0), \dots, b(M_{\text{bit}} - 1)$  to be transmitted on an SPDCCH in a subframe shall be scrambled, resulting in a block of scrambled bits  $\tilde{b}(0), \dots, \tilde{b}(M_{\text{bit}} - 1)$  according to

$$\tilde{b}(i) = (b(i) + c(i)) \bmod 2$$

where the UE-specific scrambling sequence  $c(i)$  is given by clause 7.2. The scrambling sequence generator shall be initialized with  $c_{\text{init}} = \left\lfloor n_s / 2 \right\rfloor \cdot 2^9 + n_{\text{ID},m}^{\text{SPDCCH}}$  where  $m$  is the SPDCCH resource set number.

## 6.8C.3 Modulation

The block of scrambled bits  $\tilde{b}(0), \dots, \tilde{b}(M_{\text{tot}} - 1)$  shall be modulated as described in clause 7.1, resulting in a block of complex-valued modulation symbols  $d(0), \dots, d(M_{\text{symb}} - 1)$ . Table 6.8C.3-1 specifies the modulation mappings applicable for the physical downlink control channel.

**Table 6.8C.3-1: SPDCCH modulation schemes**

| Physical channel | Modulation schemes |
|------------------|--------------------|
| SPDCCH           | QPSK               |

## 6.8C.4 Layer mapping and precoding

In case of CRS based SPDCCH, layer mapping and precoding shall be done according to clause 6.8.4 with PDCCH replaced by SPDCCH.

In case of DMRS based SPDCCH the layer mapping and precoding shall be done according to clause 6.8A.4.

## 6.8C.5 Mapping to resource elements

The mapping to resource elements is defined by operations on vectors of complex-valued symbols. Let

$y(i) = [y^{(0)}(i) \dots y^{(P-1)}(i)]^T$  denotes symbol vector  $i$  and  $y^{(p)}(i)$  represents the signal for antenna port  $p$ .

The block of vectors  $y(i) = [y^{(0)}(i) \dots y^{(P-1)}(i)]^T$ ,  $i = 0, \dots, M_{\text{symb}} - 1$  shall be mapped in sequence starting with  $y(0)$  to resource elements  $(k, l)$  on the associated antenna port(s) which meet all of the following criteria:

- they are part of the SREGs assigned for the SPDCCH transmission, and
- they are assumed by the UE not to be used for cell-specific reference signals, where the positions of the cell-specific reference signals are given by clause 6.10.1.2 with the number of antenna ports and the frequency shift of cell-specific reference signals derived as described in clause 6.10.1.2 unless other values for these parameters are provided by clause 9.1.4.3 in TS 36.213 [4], and
- they are assumed by the UE not to be used for transmission of:
  - UE-specific reference signal associated with SPDCCH
  - zero-power CSI reference signals, where the positions of the CSI reference signals are given by clause 6.10.5.2. The configuration for zero power CSI reference signals is
    - obtained as described in clause 6.10.5.2 unless other values are provided by clause 9.1.4.3 in TS 36.213 [4], and
    - obtained by higher-layer configuration of up to five reserved CSI-RS resources as part of the discovery signal configuration following the procedure for zero-power CSI-RS in clause 6.10.5.2.
  - non-zero-power CSI reference signals for CSI reporting with the configuration for non-zero power CSI reference signals for CSI reporting obtained as described in clause 6.10.5.2.
- The set of indices of  $l$  where the SPDCCH can be mapped to is dependent on if slot or subslot based SPDCCH is used, the subslot number, if CRS or DMRS based SPDCCH is configured and the number of symbols used for PDCCH. In case CRS based SPDCCH is configured, the set of indices is also dependent on the number of symbols,  $N_{\text{CRS}}^{\text{SPDCCH}}$ , configured by higher layers (see *spdcch-NoOfSymbols* in TS 36.331 [9]), that the SPDCCH is mapped over.
  - For slot-SPDCCH and for frame structure type 1 and 2, the set of indices of  $l$  for the second slot in the subframe is given in Table 6.8C.5-1. It can be noted that no SPDCCH is transmitted in the first slot of the subframe, where the DCI instead is carried in PDCCH, see [3].
  - For subslot-SPDCCH and for frame structure type 1, the set of indices of  $l$  for a given downlink subslot number in a subframe is given in Table 6.8C.5-2. It can be noted that for subslot number 0 where no SPDCCH is transmitted, and the DCI is instead carried in PDCCH, see [3].

If  $y(i)$  has been precoded according to clause 6.3.4.3 and if there is an uneven number of resource elements per PRB that fulfil all the above criteria,  $y(i)$  is not mapped to the resource element of the PRB with largest  $k$ .

Resource elements belonging to synchronization signals, the core part of PBCH, PBCH repetitions, or resource elements reserved for reference signals in the mapping operation of PBCH but not used for transmission of reference signals, shall be assumed available in the SPDCCH mapping but not used for transmission of SPDCCH.

NOTE: For DMRS based SPDCCH, the UE is not required to use the PRGs of size 2 (see TS 36.213 [4]) which is/are partially overlapped with PBCH/PSS/SSS for SPDCCH monitoring.

For DMRS based SPDCCH, the mapping to resource elements  $(k, l)$  on antenna port  $p$ , meeting the criteria above, shall be in increasing order of first the index  $k$  and then the index  $l$ .

For localized and distributed CRS based SPDCCH, the SREGs of a SPDCCH candidate are first interleaved according to step 1 below and then the modulated symbols are mapped to resource elements  $(k, l)$  of the interleaved SREGs according to step 2 below.

- Step 1: Perform a block interleaver on the SREGs building the SPDCCH candidate, where the number of rows equal to the number of SCCEs for the SPDCCH candidate and the number of columns equal to 4 (i.e. the number of SREGs in an SCCE). The SREGs are written into the matrix row by row and read out column by column.
- Step 2: The modulated symbols are mapped in sequence starting with  $y^{(p)}(0)$  to resource elements  $(k,l)$  on antenna port  $p$  in increasing order of the index  $k$ , meeting the criteria above, over the interleaved SREGs in the order given by the block interleaver of step 1.

**Table 6.8C.5-1: Set of indices of  $l$  for slot-SPDCCH**

| DMRS based SPDCCH | CRS based SPDCCH       |                        |
|-------------------|------------------------|------------------------|
|                   | $N_{CRS}^{SPDCCH} = 1$ | $N_{CRS}^{SPDCCH} = 2$ |
| $\{0,1\}$         | $\{0\}$                | $\{0,1\}$              |

**Table 6.8C.5-2: Set of indices of  $l$  for subslot-SPDCCH**

| Number of symbols used for PDCCH | Subslot index | Set of indices of $l$ |                        |                        |
|----------------------------------|---------------|-----------------------|------------------------|------------------------|
|                                  |               | DMRS based SPDCCH     | CRS based SPDCCH       |                        |
|                                  |               |                       | $N_{CRS}^{SPDCCH} = 1$ | $N_{CRS}^{SPDCCH} = 2$ |
| 1 or 3                           | 1             | $\{3,4\}$             | $\{3\}$                | $\{3,4\}$              |
| 2                                | 1             | $\{2,3,4\}$           | $\{2\}$                | $\{2,3\}$              |
| 1, 2 or 3                        | 2             | $\{5,6\}$             | $\{5\}$                | $\{5,6\}$              |
| 1, 2 or 3                        | 3             | $\{0,1\}$             | $\{0\}$                | $\{0,1\}$              |
| 1, 2 or 3                        | 4             | $\{2,3\}$             | $\{2\}$                | $\{2,3\}$              |
| 1, 2 or 3                        | 5             | $\{4,5,6\}$           | $\{4\}$                | $\{4,5\}$              |

## 6.9 Physical hybrid ARQ indicator channel

The PHICH carries the hybrid-ARQ ACK/NACK. Multiple PHICHs mapped to the same set of resource elements constitute a PHICH group, where PHICHs within the same PHICH group are separated through different orthogonal sequences. A PHICH resource is identified by the index pair  $(n_{PHICH}^{group}, n_{PHICH}^{seq})$ , where  $n_{PHICH}^{group}$  is the PHICH group number and  $n_{PHICH}^{seq}$  is the orthogonal sequence index within the group.

For frame structure type 1 and type 3, the number of PHICH groups  $N_{PHICH}^{group}$  is constant in all subframes and given by

$$N_{PHICH}^{group} = \begin{cases} \left\lceil N_g (N_{RB}^{DL}/8) \right\rceil & \text{for normal cyclic prefix} \\ 2 \cdot \left\lceil N_g (N_{RB}^{DL}/8) \right\rceil & \text{for extended cyclic prefix} \end{cases}$$

where  $N_g \in \{1/6, 1/2, 1, 2\}$  is provided by higher layers. The index  $n_{PHICH}^{group}$  ranges from 0 to  $N_{PHICH}^{group} - 1$ .

For frame structure type 2, the number of PHICH groups may vary between subframes and is given by  $m_i \cdot N_{PHICH}^{group}$  where  $N_{PHICH}^{group}$  is given by the expression above and  $m_i$  is given by Table 6.9-1 with the uplink-downlink configuration provided by the higher-layer parameter *subframeAssignment*. The index  $n_{PHICH}^{group}$  in a subframe with non-zero PHICH resources ranges from 0 to  $m_i \cdot N_{PHICH}^{group} - 1$ .

**Table 6.9-1: The factor  $m_i$  for frame structure type 2**

| Uplink-downlink configuration | Subframe number $i$ |   |   |   |   |   |   |   |   |   |
|-------------------------------|---------------------|---|---|---|---|---|---|---|---|---|
|                               | 0                   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| 0                             | 2                   | 1 | 0 | 0 | 0 | 2 | 1 | 0 | 0 | 0 |
| 1                             | 0                   | 1 | 0 | 0 | 1 | 0 | 1 | 0 | 0 | 1 |

|   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|
| 2 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 0 |
| 3 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 |
| 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 |
| 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| 6 | 1 | 1 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 1 |

### 6.9.1 Modulation

The block of bits  $b(0), \dots, b(M_{\text{bit}} - 1)$  transmitted on one PHICH in one subframe shall be modulated as described in clause 7.1, resulting in a block of complex-valued modulation symbols  $z(0), \dots, z(M_s - 1)$ , where  $M_s = M_{\text{bit}}$ . Table 6.9.1-1 specifies the modulation mappings applicable for the physical hybrid ARQ indicator channel.

**Table 6.9.1-1: PHICH modulation schemes.**

| Physical channel | Modulation schemes |
|------------------|--------------------|
| PHICH            | BPSK               |

The block of modulation symbols  $z(0), \dots, z(M_s - 1)$  shall be symbol-wise multiplied with an orthogonal sequence and scrambled, resulting in a sequence of modulation symbols  $d(0), \dots, d(M_{\text{symb}} - 1)$  according to

$$d(i) = w(i \bmod N_{\text{SF}}^{\text{PHICH}}) \cdot (1 - 2c(i)) \cdot z(\lfloor i / N_{\text{SF}}^{\text{PHICH}} \rfloor)$$

where

$$\begin{aligned}
 i &= 0, \dots, M_{\text{symb}} - 1 \\
 M_{\text{symb}} &= N_{\text{SF}}^{\text{PHICH}} \cdot M_s \\
 N_{\text{SF}}^{\text{PHICH}} &= \begin{cases} 4 & \text{normal cyclic prefix} \\ 2 & \text{extended cyclic prefix} \end{cases}
 \end{aligned}$$

and  $c(i)$  is a cell-specific scrambling sequence generated according to clause 7.2. The scrambling sequence generator shall be initialised with  $c_{\text{init}} = (\lfloor n_s/2 \rfloor + 1) \cdot (2N_{\text{ID}}^{\text{cell}} + 1) \cdot 2^9 + N_{\text{ID}}^{\text{cell}}$  at the start of each subframe.

The sequence  $[w(0) \ \dots \ w(N_{\text{SF}}^{\text{PHICH}} - 1)]$  is given by Table 6.9.1-2 where the sequence index  $n_{\text{PHICH}}^{\text{seq}}$  corresponds to the PHICH number within the PHICH group.

**Table 6.9.1-2: Orthogonal sequences  $[w(0) \ \dots \ w(N_{\text{SF}}^{\text{PHICH}} - 1)]$  for PHICH**

| Sequence index<br>$n_{\text{PHICH}}^{\text{seq}}$ | Orthogonal sequence                                        |                                                              |
|---------------------------------------------------|------------------------------------------------------------|--------------------------------------------------------------|
|                                                   | Normal cyclic prefix<br>$N_{\text{SF}}^{\text{PHICH}} = 4$ | Extended cyclic prefix<br>$N_{\text{SF}}^{\text{PHICH}} = 2$ |
| 0                                                 | $[+1 \ +1 \ +1 \ +1]$                                      | $[+1 \ +1]$                                                  |
| 1                                                 | $[+1 \ -1 \ +1 \ -1]$                                      | $[+1 \ -1]$                                                  |
| 2                                                 | $[+1 \ +1 \ -1 \ -1]$                                      | $[+j \ +j]$                                                  |
| 3                                                 | $[+1 \ -1 \ -1 \ +1]$                                      | $[+j \ -j]$                                                  |
| 4                                                 | $[+j \ +j \ +j \ +j]$                                      | -                                                            |
| 5                                                 | $[+j \ -j \ +j \ -j]$                                      | -                                                            |
| 6                                                 | $[+j \ +j \ -j \ -j]$                                      | -                                                            |
| 7                                                 | $[+j \ -j \ -j \ +j]$                                      | -                                                            |

### 6.9.2 Resource group alignment, layer mapping and precoding

The block of symbols  $d(0), \dots, d(M_{\text{symb}} - 1)$  should be first aligned with resource element group size, resulting in a block of symbols  $d^{(0)}(0), \dots, d^{(0)}(c \cdot M_{\text{symb}} - 1)$ , where  $c = 1$  for normal cyclic prefix; and  $c = 2$  for extended cyclic prefix.

For normal cyclic prefix,  $d^{(0)}(i) = d(i)$ , for  $i = 0, \dots, M_{\text{symb}} - 1$ .

For extended cyclic prefix,

$$\begin{bmatrix} d^{(0)}(4i) & d^{(0)}(4i+1) & d^{(0)}(4i+2) & d^{(0)}(4i+3) \end{bmatrix}^T = \begin{cases} \begin{bmatrix} d(2i) & d(2i+1) & 0 & 0 \end{bmatrix}^T & n_{\text{PHICH}}^{\text{group}} \bmod 2 = 0 \\ \begin{bmatrix} 0 & 0 & d(2i) & d(2i+1) \end{bmatrix}^T & n_{\text{PHICH}}^{\text{group}} \bmod 2 = 1 \end{cases}$$

for  $i = 0, \dots, (M_{\text{symb}}/2) - 1$ .

The block of symbols  $d^{(0)}(0), \dots, d^{(0)}(c \cdot M_{\text{symb}} - 1)$  shall be mapped to layers and precoded, resulting in a block of vectors  $y(i) = [y^{(0)}(i) \ \dots \ y^{(P-1)}(i)]^T$ ,  $i = 0, \dots, c \cdot M_{\text{symb}} - 1$ , where  $y^{(p)}(i)$  represents the signal for antenna port  $p$ ,  $p = 0, \dots, P - 1$  and the number of cell-specific reference signals  $P \in \{1, 2, 4\}$ . The layer mapping and precoding operation depends on the cyclic prefix length and the number of antenna ports used for transmission of the PHICH. The PHICH shall be transmitted on the same set of antenna ports as the PBCH.

For transmission on a single antenna port,  $P = 1$ , layer mapping and precoding are defined by clauses 6.3.3.1 and 6.3.4.1, respectively, with  $M_{\text{symb}}^{(0)} = c \cdot M_{\text{symb}}$ .

For transmission on two antenna ports,  $P = 2$ , layer mapping and precoding are defined by clauses 6.3.3.3 and 6.3.4.3, respectively, with  $M_{\text{symb}}^{(0)} = c \cdot M_{\text{symb}}$ .

For transmission on four antenna ports,  $P = 4$ , layer mapping is defined by clause 6.3.3.3 with  $M_{\text{symb}}^{(0)} = c \cdot M_{\text{symb}}$  and precoding by

$$\begin{bmatrix} y^{(0)}(4i) \\ y^{(1)}(4i) \\ y^{(2)}(4i) \\ y^{(3)}(4i) \\ y^{(0)}(4i+1) \\ y^{(1)}(4i+1) \\ y^{(2)}(4i+1) \\ y^{(3)}(4i+1) \\ y^{(0)}(4i+2) \\ y^{(1)}(4i+2) \\ y^{(2)}(4i+2) \\ y^{(3)}(4i+2) \\ y^{(0)}(4i+3) \\ y^{(1)}(4i+3) \\ y^{(2)}(4i+3) \\ y^{(3)}(4i+3) \end{bmatrix} = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 0 & 0 & 0 & j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & -j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & j & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & -1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & -j & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix} \begin{bmatrix} \text{Re}(x^{(0)}(i)) \\ \text{Re}(x^{(1)}(i)) \\ \text{Re}(x^{(2)}(i)) \\ \text{Re}(x^{(3)}(i)) \\ \text{Im}(x^{(0)}(i)) \\ \text{Im}(x^{(1)}(i)) \\ \text{Im}(x^{(2)}(i)) \\ \text{Im}(x^{(3)}(i)) \end{bmatrix}$$

if  $(i + n_{\text{PHICH}}^{\text{group}}) \bmod 2 = 0$  for normal cyclic prefix, or  $(i + \lfloor n_{\text{PHICH}}^{\text{group}}/2 \rfloor) \bmod 2 = 0$  for extended cyclic prefix, where  $n_{\text{PHICH}}^{\text{group}}$  is the PHICH group number and  $i = 0, 1, 2$ , and by

$$\begin{bmatrix} y^{(0)}(4i) \\ y^{(1)}(4i) \\ y^{(2)}(4i) \\ y^{(3)}(4i) \\ y^{(0)}(4i+1) \\ y^{(1)}(4i+1) \\ y^{(2)}(4i+1) \\ y^{(3)}(4i+1) \\ y^{(0)}(4i+2) \\ y^{(1)}(4i+2) \\ y^{(2)}(4i+2) \\ y^{(3)}(4i+2) \\ y^{(0)}(4i+3) \\ y^{(1)}(4i+3) \\ y^{(2)}(4i+3) \\ y^{(3)}(4i+3) \end{bmatrix} = \frac{1}{\sqrt{2}} \begin{bmatrix} 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & j & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & -j & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & j & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & -1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & j \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & -j & 0 \end{bmatrix} \begin{bmatrix} \text{Re}\{x^{(0)}(i)\} \\ \text{Re}\{x^{(1)}(i)\} \\ \text{Re}\{x^{(2)}(i)\} \\ \text{Re}\{x^{(3)}(i)\} \\ \text{Im}\{x^{(0)}(i)\} \\ \text{Im}\{x^{(1)}(i)\} \\ \text{Im}\{x^{(2)}(i)\} \\ \text{Im}\{x^{(3)}(i)\} \end{bmatrix}$$

otherwise for  $i = 0, 1, 2$ .

### 6.9.3 Mapping to resource elements

The sequence  $\bar{y}^{(p)}(0), \dots, \bar{y}^{(p)}(M_{\text{symb}}^{(0)} - 1)$  for each of the PHICH groups is defined by

$$\bar{y}^{(p)}(n) = \sum y_i^{(p)}(n)$$

where the sum is over all PHICHs in the PHICH group and  $y_i^{(p)}(n)$  represents the symbol sequence from the  $i$ :th PHICH in the PHICH group.

PHICH groups are mapped to PHICH mapping units.

For normal cyclic prefix, the mapping of PHICH group  $m$  to PHICH mapping unit  $m'$  is defined by

$$\tilde{y}_{m'}^{(p)}(n) = \bar{y}_m^{(p)}(n)$$

where

$$m' = m = \begin{cases} 0, 1, \dots, N_{\text{PHICH}}^{\text{group}} - 1 & \text{for frame structure type 1 and type 3} \\ 0, 1, \dots, m_i \cdot N_{\text{PHICH}}^{\text{group}} - 1 & \text{for frame structure type 2} \end{cases}$$

and where  $m_i$  is given by Table 6.9-1.

For extended cyclic prefix, the mapping of PHICH group  $m$  and  $m+1$  to PHICH mapping unit  $m'$  is defined by

$$\tilde{y}_{m'}^{(p)}(n) = \bar{y}_m^{(p)}(n) + \bar{y}_{m+1}^{(p)}(n)$$

where

$$m' = m / 2$$

$$m = \begin{cases} 0, 2, \dots, N_{\text{PHICH}}^{\text{group}} - 2 & \text{for frame structure type 1} \\ 0, 2, \dots, m_i \cdot N_{\text{PHICH}}^{\text{group}} - 2 & \text{for frame structure type 2} \end{cases}$$

and where  $m_i$  is given by Table 6.9-1.

Let  $z^{(p)}(i) = \langle \tilde{y}^{(p)}(4i), \tilde{y}^{(p)}(4i+1), \tilde{y}^{(p)}(4i+2), \tilde{y}^{(p)}(4i+3) \rangle$ ,  $i = 0,1,2$  denote symbol quadruplet  $i$  for antenna port  $p$ .

Mapping to resource elements is defined in terms of symbol quadruplets according to steps 1–10 below:

- 1) For each value of  $l'$
- 2) Let  $n_{l'}$  denote the number of resource element groups not assigned to PCFICH in OFDM symbol  $l'$
- 3) Number the resource-element groups not assigned to PCFICH in OFDM symbol  $l'$  from 0 to  $n_{l'} - 1$ , starting from the resource-element group with the lowest frequency-domain index.
- 4) Initialize  $m' = 0$  (PHICH mapping unit number)
- 5) For each value of  $i = 0,1,2$
- 6) Symbol-quadruplet  $z^{(p)}(i)$  from PHICH mapping unit  $m'$  is mapped to the resource-element group represented by  $(k', l')_i$  as defined in clause 6.2.4 where the indices  $k'_i$  and  $l'_i$  are given by steps 7 and 8 below:
- 7) The time-domain index  $l'_i$  is given by

$$l'_i = \begin{cases} 0 & \text{normal PHICH duration, all subframes} \\ \lfloor m'/2 \rfloor + i + 1 \bmod 2 & \text{extended PHICH duration, MBSFN subframes} \\ \lfloor m'/2 \rfloor + i + 1 \bmod 2 & \text{extended PHICH duration, subframe 1 and 6 in frame structure type 2} \\ \lfloor m'/2 \rfloor + i + 1 \bmod 2 & \text{extended PHICH duration,} \\ i & \text{subframe with the same duration as the DwPTS duration of a special subframe configuration in frame structure type 3} \\ & \text{otherwise} \end{cases}$$

- 8) Set the frequency-domain index  $k'_i$  to the resource-element group assigned the number  $\bar{n}_i$  in step 3 above, where  $\bar{n}_i$  is given by

$$\bar{n}_i = \begin{cases} \left( \left\lfloor N_{\text{ID}}^{\text{cell}} \cdot n_{l'_i} / n_1 \right\rfloor + m' \right) \bmod n_{l'_i} & i = 0 \\ \left( \left\lfloor N_{\text{ID}}^{\text{cell}} \cdot n_{l'_i} / n_1 \right\rfloor + m' + \left\lfloor n_{l'_i} / 3 \right\rfloor \right) \bmod n_{l'_i} & i = 1 \\ \left( \left\lfloor N_{\text{ID}}^{\text{cell}} \cdot n_{l'_i} / n_1 \right\rfloor + m' + \left\lfloor 2n_{l'_i} / 3 \right\rfloor \right) \bmod n_{l'_i} & i = 2 \end{cases}$$

in case of extended PHICH duration in MBSFN subframes, or extended PHICH duration in subframes 1 and 6 for frame structure type 2, or extended PHICH duration in subframe with the same duration as the DwPTS duration of a special subframe configuration in frame structure type 3 and by

$$\bar{n}_i = \begin{cases} \left( \left\lfloor N_{\text{ID}}^{\text{cell}} \cdot n_{l'_i} / n_0 \right\rfloor + m' \right) \bmod n_{l'_i} & i = 0 \\ \left( \left\lfloor N_{\text{ID}}^{\text{cell}} \cdot n_{l'_i} / n_0 \right\rfloor + m' + \left\lfloor n_{l'_i} / 3 \right\rfloor \right) \bmod n_{l'_i} & i = 1 \\ \left( \left\lfloor N_{\text{ID}}^{\text{cell}} \cdot n_{l'_i} / n_0 \right\rfloor + m' + \left\lfloor 2n_{l'_i} / 3 \right\rfloor \right) \bmod n_{l'_i} & i = 2 \end{cases}$$

otherwise.

- 9) Increase  $m'$  by 1.
- 10) Repeat from step 5 until all PHICH mapping units have been assigned.

The PHICH duration is configurable by higher layers according to Table 6.9.3-1.

The PHICH shall not be transmitted in MBSFN subframes with zero-size non-MBSFN region.

Table 6.9.3-1: PHICH duration in MBSFN and non-MBSFN subframes

| PHICH duration | Non-MBSFN subframes                                 |                                                                                                                             |                 | MBSFN subframes |
|----------------|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------|
|                | Subframes 1 and 6 in case of frame structure type 2 | Subframe with the same duration as the DwPTS duration of a special subframe configuration in case of frame structure type 3 | All other cases |                 |
| Normal         | 1                                                   | 1                                                                                                                           | 1               | 1               |
| Extended       | 2                                                   | 2                                                                                                                           | 3               | 2               |

## 6.10 Reference signals

Six types of downlink reference signals are defined:

- Cell-specific Reference Signal (CRS)
- MBSFN reference signal
- UE-specific Reference Signal (DM-RS) associated with PDSCH
- DeModulation Reference Signal (DM-RS) associated with EPDCCH or MPDCCH
- Positioning Reference Signal (PRS)
- CSI Reference Signal (CSI-RS)

There is one reference signal transmitted per downlink antenna port.

### 6.10.1 Cell-specific Reference Signal (CRS)

The UE may assume cell-specific reference signals are, unless otherwise stated in [4, clause 12], transmitted in

- all downlink subframes for frame structure type 1,
- all downlink subframes and DwPTS for frame structure type 2,
- non-empty subframes for frame structure type 3

in a cell supporting PDSCH transmission.

If special subframe configuration 10 is configured by the higher layer signalling *ssp10-CRS-LessDwPTS*, the UE cannot assume that cell specific reference signals are transmitted in the 5<sup>th</sup> OFDM symbol of the special subframe.

Cell-specific reference signals are transmitted on one or several of antenna ports 0 to 3.

Cell-specific reference signals are transmitted in subframes where  $\Delta f = 15$  kHz only.

#### 6.10.1.1 Sequence generation

The reference-signal sequence  $r_{l,n_s}(m)$  is defined by

$$r_{l,n_s}(m) = \frac{1}{\sqrt{2}}(1 - 2 \cdot c(2m)) + j \frac{1}{\sqrt{2}}(1 - 2 \cdot c(2m+1)), \quad m = 0, 1, \dots, 2N_{\text{RB}}^{\text{max,DL}} - 1$$

where  $n_s$  is the slot number within a radio frame and  $l$  is the OFDM symbol number within the slot. The pseudo-random sequence  $c(i)$  is defined in clause 7.2. The pseudo-random sequence generator shall be initialised with

$c_{\text{init}} = 2^{10} \cdot (7 \cdot (n'_s + 1) + l + 1) \cdot (2 \cdot N_{\text{ID}}^{\text{cell}} + 1) + 2 \cdot N_{\text{ID}}^{\text{cell}} + N_{\text{CP}}$  at the start of each OFDM symbol where

$$n'_s = \begin{cases} 10 \lfloor n_s / 10 \rfloor + n_s \bmod 2 & \text{for frame structure type 3 when the CRS is part of a DRS} \\ n_s & \text{otherwise} \end{cases}$$

$$N_{\text{CP}} = \begin{cases} 1 & \text{for normal CP} \\ 0 & \text{for extended CP} \end{cases}$$

### 6.10.1.2 Mapping to resource elements

The reference signal sequence  $r_{l,n_s}(m)$  shall be mapped to complex-valued modulation symbols  $a_{k,l}^{(p)}$  used as reference symbols for antenna port  $p$  in slot  $n_s$  according to

$$a_{k,l}^{(p)} = r_{l,n_s}(m')$$

where

$$k = 6m + (v + v_{\text{shift}}) \bmod 6$$

$$l = \begin{cases} 0, N_{\text{syml}}^{\text{DL}} - 3 & \text{if } p \in \{0,1\} \\ 1 & \text{if } p \in \{2,3\} \end{cases}$$

$$m = 0, 1, \dots, 2 \cdot N_{\text{RB}}^{\text{DL}} - 1$$

$$m' = m + N_{\text{RB}}^{\text{max,DL}} - N_{\text{RB}}^{\text{DL}}$$

The variables  $v$  and  $v_{\text{shift}}$  define the position in the frequency domain for the different reference signals where  $v$  is given by


$$v = \begin{cases} 0 & \text{if } p = 0 \text{ and } l = 0 \\ 3 & \text{if } p = 0 \text{ and } l \neq 0 \\ 3 & \text{if } p = 1 \text{ and } l = 0 \\ 0 & \text{if } p = 1 \text{ and } l \neq 0 \\ 3(n_s \bmod 2) & \text{if } p = 2 \\ 3 + 3(n_s \bmod 2) & \text{if } p = 3 \end{cases}$$

The cell-specific frequency shift is given by  $v_{\text{shift}} = N_{\text{ID}}^{\text{cell}} \bmod 6$ .

Resource elements  $(k, l)$  used for transmission of cell-specific reference signals on any of the antenna ports in a slot shall not be used for any transmission on any other antenna port in the same slot and set to zero.

In an MBSFN subframe, cell-specific reference signals shall only be transmitted in the non-MBSFN region of the MBSFN subframe.

Figures 6.10.1.2-1 and 6.10.1.2-2 illustrate the resource elements used for reference signal transmission according to the above definition. The notation  $R_p$  is used to denote a resource element used for reference signal transmission on antenna port  $p$ .

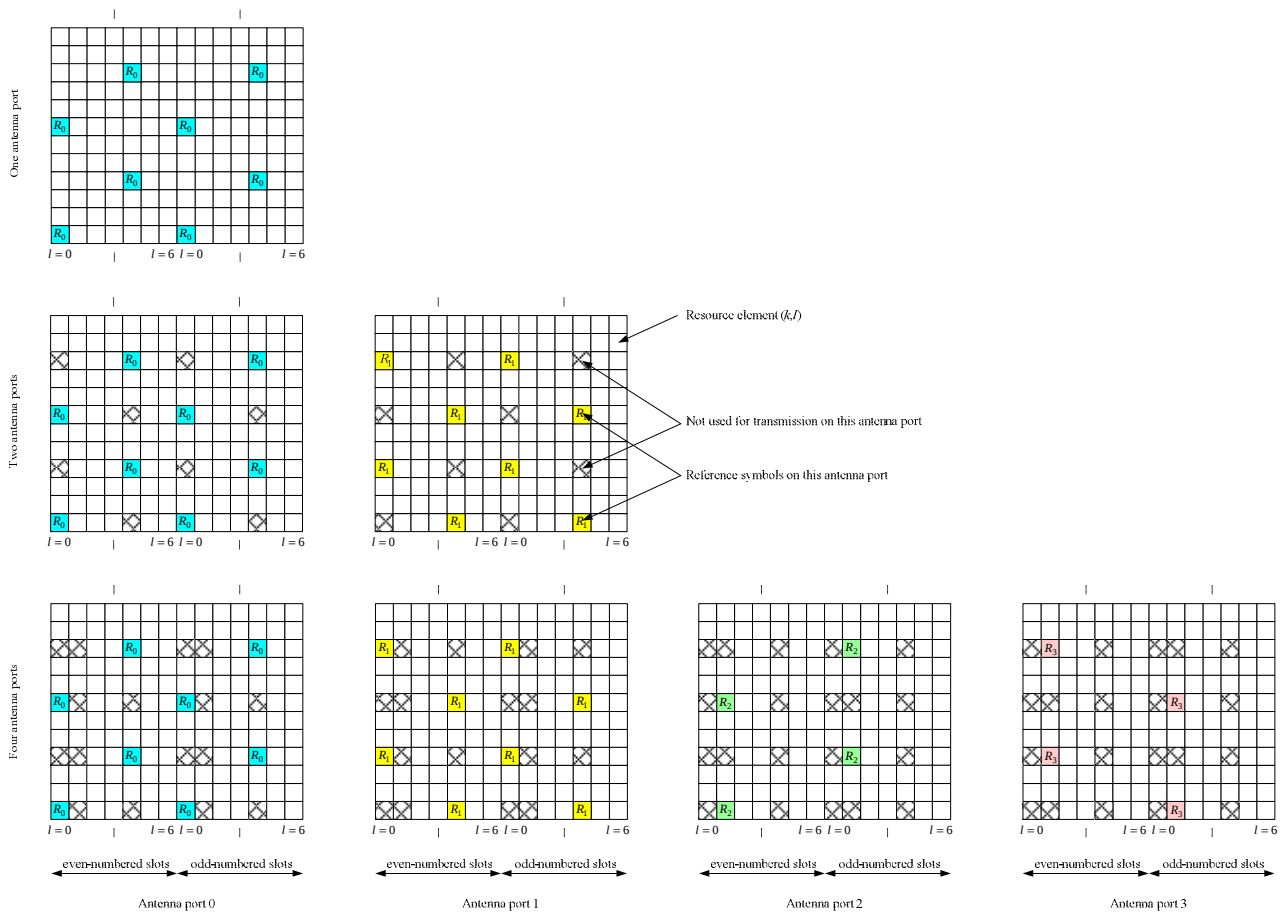

**Figure 6.10.1.2-1. Mapping of downlink reference signals (normal cyclic prefix)**

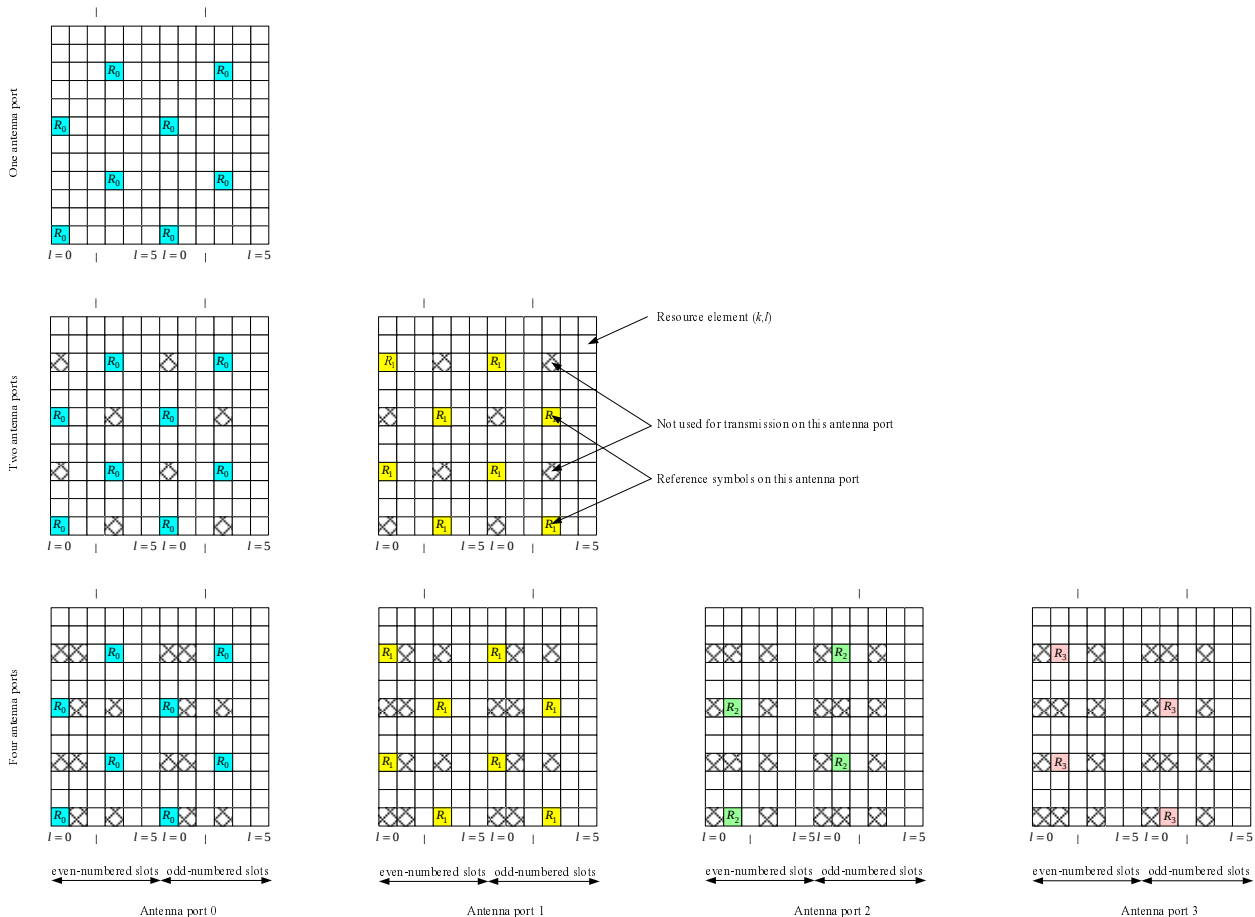


Figure 6.10.1.2-2. Mapping of downlink reference signals (extended cyclic prefix)

## 6.10.2 MBSFN reference signals

MBSFN reference signals shall be transmitted in the MBSFN region of MBSFN subframes/slots only when the PMCH is transmitted. MBSFN reference signals are transmitted on antenna port 4.

For an MBMS-dedicated carrier configured with a single MBSFN area, and for a PMCH transmitted with 0.37 kHz subcarrier spacing in slot  $n$ , which is indicated to contain MCCH by higher layer parameter *MCCH-Config*:

- for MBSFN reference signal pattern type 1, the UE may assume that MBSFN reference signals associated with the same  $N_{ID}^{MBSFN}$  are present in the three preceding slots to slot  $n$ .
- for MBSFN reference signal pattern type 2, the UE may assume that MBSFN reference signals associated with the same  $N_{ID}^{MBSFN}$  are present in the preceding slot to slot  $n$ .

MBSFN reference signals are defined for extended cyclic prefix only.

### 6.10.2.1 Sequence generation

#### 6.10.2.1.1 Sequence generation for 15 kHz and 7.5 kHz subcarrier spacing

The MBSFN reference-signal sequence  $r_{l,n_s}(m)$  is defined by

$$r_{l,n_s}(m) = \frac{1}{\sqrt{2}}(1 - 2 \cdot c(2m)) + j \frac{1}{\sqrt{2}}(1 - 2 \cdot c(2m+1)), \quad m = 0, 1, \dots, 6N_{RB}^{\max, DL} - 1$$

where  $n_s$  is the slot number within a radio frame and  $l$  is the OFDM symbol number within the slot. The pseudo-random sequence  $c(i)$  is defined in clause 7.2. The pseudo-random sequence generator shall be initialised with

$c_{\text{init}} = 2^9 \cdot (7 \cdot (n_s + 1) + l + 1) \cdot (2 \cdot N_{\text{ID}}^{\text{MBSFN}} + 1) + N_{\text{ID}}^{\text{MBSFN}}$  at the start of each OFDM symbol.

#### 6.10.2.1.2 Sequence generation for 1.25 kHz subcarrier spacing

The MBSFN reference-signal sequence  $r_{l,n_{\text{sf}}}(m)$  is defined by

$$r_{l,n_{\text{sf}}}(m) = \frac{1}{\sqrt{2}}(1 - 2 \cdot c(2m)) + j \frac{1}{\sqrt{2}}(1 - 2 \cdot c(2m+1)), \quad m = 0, 1, \dots, 24N_{\text{RB}}^{\text{max,DL}} - 1$$

where  $n_{\text{sf}}$  is the subframe number within a radio frame and  $l$  is the OFDM symbol number within the subframe. The pseudo-random sequence  $c(i)$  is defined in clause 7.2. The pseudo-random sequence generator shall be initialised with  $c_{\text{init}} = 2^9 \cdot (7 \cdot (n_{\text{sf}} + 1) + l + 1) \cdot (2 \cdot N_{\text{ID}}^{\text{MBSFN}} + 1) + N_{\text{ID}}^{\text{MBSFN}}$  at the start of each OFDM symbol.

#### 6.10.2.1.3 Sequence generation for 2.5 kHz subcarrier spacing

The MBSFN reference-signal sequence  $r_{l,n_{\text{sf}}}(m)$  is defined by

$$r_{l,n_{\text{sf}}}(m) = \frac{1}{\sqrt{2}}(1 - 2c(2m)) + j \frac{1}{\sqrt{2}}(1 - 2c(2m+1))$$

$$m = 0, 1, \dots, 18N_{\text{RB}}^{\text{max,DL}} - 1$$

where  $n_{\text{sf}}$  is the subframe number within a radio frame and  $l$  is the OFDM symbol number within the subframe. The pseudo-random sequence  $c(i)$  is defined in clause 7.2. The pseudo-random sequence generator shall be initialised with

$$c_{\text{init}} = 2^9(7(n_{\text{sf}} + 1) + l + 1)(2N_{\text{ID}}^{\text{MBSFN}} + 1) + N_{\text{ID}}^{\text{MBSFN}}$$

#### 6.10.2.1.4 Sequence generation for 0.37 kHz subcarrier spacing

The MBSFN reference-signal sequence  $r_{l,n_s}(m)$  is defined by

$$r_{l,n_s}(m) = \frac{1}{\sqrt{2}}(1 - 2c(2m)) + j \frac{1}{\sqrt{2}}(1 - 2c(2m+1))$$

$$m = 0, 1, \dots, \frac{N_{\text{sc}}^{\text{RB}}}{12} N_{\text{RB}}^{\text{max,DL}} - 1 \quad \text{for MBSFN reference signal pattern type 1}$$

$$m = 0, 1, \dots, \frac{N_{\text{sc}}^{\text{RB}}}{6} N_{\text{RB}}^{\text{max,DL}} - 1 \quad \text{for MBSFN reference signal pattern type 2}$$

where  $n_s$  is the 3 ms slot number within the 40 ms period and  $l$  is the OFDM symbol number within the slot. The pseudo-random sequence  $c(i)$  is defined in clause 7.2. The pseudo-random sequence generator shall be initialised with

$$c_{\text{init}} = 2^9(7(n_s + 1) + l + 1)(2N_{\text{ID}}^{\text{MBSFN}} + 1) + N_{\text{ID}}^{\text{MBSFN}}$$

### 6.10.2.2 Mapping to resource elements

#### 6.10.2.2.1 Mapping to resource elements for 15 kHz and 7.5 kHz subcarrier spacing

The reference-signal sequence  $r_{l,n_s}(m')$  in OFDM symbol  $l$  shall be mapped to complex-valued modulation symbols  $a_{k,l}^{(p)}$  with  $p = 4$  according to

$$a_{k,l}^{(p)} = r_{l,n_s}(m')$$

where


$$k = \begin{cases} 2m & \text{if } l \neq 0 \text{ and } \Delta f = 15 \text{ kHz} \\ 2m+1 & \text{if } l = 0 \text{ and } \Delta f = 15 \text{ kHz} \\ 4m & \text{if } l \neq 0 \text{ and } \Delta f = 7.5 \text{ kHz} \\ 4m+2 & \text{if } l = 0 \text{ and } \Delta f = 7.5 \text{ kHz} \end{cases}$$

$$l = \begin{cases} 2 & \text{if } n_s \bmod 2 = 0 \text{ and } \Delta f = 15 \text{ kHz} \\ 0,4 & \text{if } n_s \bmod 2 = 1 \text{ and } \Delta f = 15 \text{ kHz} \\ 1 & \text{if } n_s \bmod 2 = 0 \text{ and } \Delta f = 7.5 \text{ kHz} \\ 0,2 & \text{if } n_s \bmod 2 = 1 \text{ and } \Delta f = 7.5 \text{ kHz} \end{cases}$$


$$m = 0, 1, \dots, 6N_{\text{RB}}^{\text{DL}} - 1$$

$$m' = m + 3(N_{\text{RB}}^{\text{max,DL}} - N_{\text{RB}}^{\text{DL}})$$

Figure 6.10.2.2-1 illustrates the resource elements used for MBSFN reference signal transmission in case of  $\Delta f = 15 \text{ kHz}$ . In case of  $\Delta f = 7.5 \text{ kHz}$ , the MBSFN reference signal shall be mapped to resource elements according to Figure 6.10.2.2-3. The notation  $R_p$  is used to denote a resource element used for reference signal transmission on antenna port  $p$ .

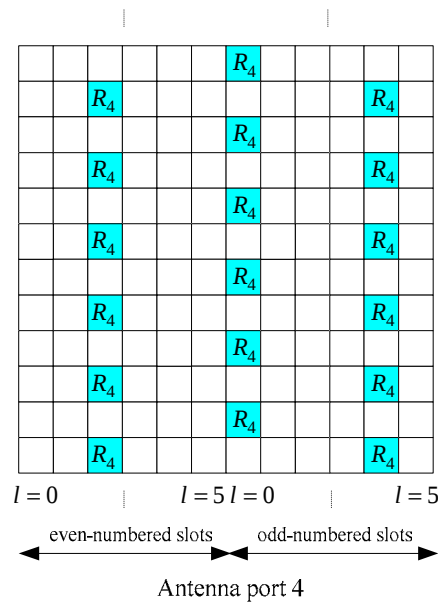

**Figure 6.10.2.2-1: Mapping of MBSFN reference signals (extended cyclic prefix,  $\Delta f = 15 \text{ kHz}$ )**

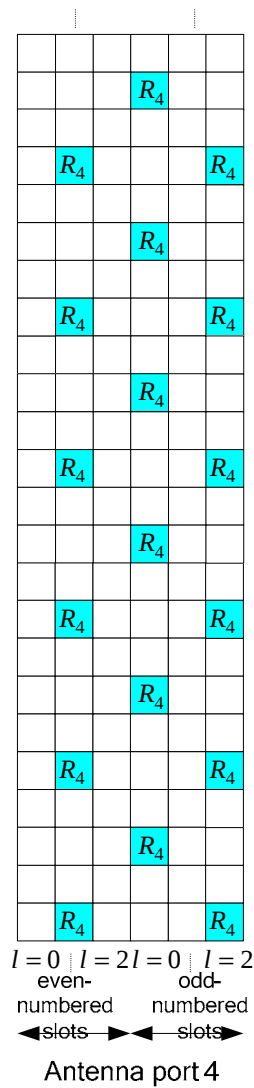

**Figure 6.10.2.2-3: Mapping of MBSFN reference signals (extended cyclic prefix,  $\Delta f = 7.5$  kHz)**

#### 6.10.2.2.2 Mapping to resource elements for 1.25 kHz

The reference-signal sequence  $r_{l,n_{sf}}(m')$  in OFDM symbol  $l$  shall be mapped to complex-valued modulation symbols  $a_{k,l}^{(p)}$  with  $p = 4$  according to

$$a_{k,l}^{(p)} = r_{l,n_{sf}}(m')$$

where

$$k = \begin{cases} 6m & \text{if } n_{sf} \bmod 2 = 0 \\ 6m + 3 & \text{if } n_{sf} \bmod 2 = 1 \end{cases}$$

$$l = 0$$

$$m = 0, 1, \dots, 24N_{RB}^{DL} - 1$$

$$m' = m + 3(N_{RB}^{max,DL} - N_{RB}^{DL})$$

#### 6.10.2.2.3 Mapping to resource elements for 2.5 kHz subcarrier spacing

The reference-signal sequence  $r_{l,n_{sf}}(m')$  in OFDM symbol  $l$  shall be mapped to complex-valued modulation symbols

$a_{k,l}^{(p)}$  with  $p = 4$  according to

$$a_{k,l}^{(p)} = r_{l,n_{sf}}(m')$$

where

$$\begin{aligned} k &= \begin{cases} 4m & \text{if } l = 0 \\ 4m + 2 & \text{if } l = 1 \end{cases} \\ l &= 0, 1 \\ m &= 0, 1, \dots, \frac{N_{sc}^{RB}}{4} N_{RB}^{DL} - 1 \\ m' &= m + \frac{N_{sc}^{RB}}{4} \Delta \\ \Delta &= \frac{N_{RB}^{max,DL} - N_{RB}^{DL}}{2} \end{aligned}$$

#### 6.10.2.2.4 Mapping to resource elements for 0.37 kHz subcarrier spacing

The reference-signal sequence  $r_l(m')$  in OFDM symbol  $l$  shall be mapped to complex-valued modulation symbols  $a_{k,l}^{(p)}$  with  $p = 4$  according to

$$a_{k,l}^{(p)} = r_{l,n_s}(m')$$

when

$$0 \leq k < N_{sc}^{RB} N_{RB}^{DL}$$

and where  $\tilde{n}_s$  is the 3ms absolute slot number, defined as  $\tilde{n}_s = n_s + 13 \lfloor n_f/4 \rfloor$ ,  $n_s$  is the 3 ms slot number as defined in clause 4.1 and

- for MBSFN reference signal pattern type 1

$$\begin{aligned} k &= 12 \left( m' - \left\lfloor \frac{N_{sc}^{RB}}{12} \Delta \right\rfloor \right) + 3(\tilde{n}_s \bmod 4) \\ l &= 0 \\ \Delta &= \frac{N_{RB}^{max,DL} - N_{RB}^{DL}}{2} \\ m' &= 0, 1, \dots, \frac{N_{sc}^{RB}}{12} N_{RB}^{max,DL} - 1 \end{aligned}$$

- for MBSFN reference signal pattern type 2

$$\begin{aligned} k &= 6 \left( m' - \left\lfloor \frac{N_{sc}^{RB}}{6} \Delta \right\rfloor \right) + 3(\tilde{n}_s \bmod 2) \\ l &= 0 \\ \Delta &= \frac{N_{RB}^{max,DL} - N_{RB}^{DL}}{2} \\ m' &= 0, 1, \dots, \frac{N_{sc}^{RB}}{6} N_{RB}^{max,DL} - 1 \end{aligned}$$

### 6.10.3 UE-specific reference signals associated with PDSCH

UE-specific reference signals associated with PDSCH

- are transmitted on antenna port(s)  $p=5$ ,  $p=7$ ,  $p=8$ ,  $p=11$ ,  $p=13$ ,  $p=\{11,13\}$ ,  $p=7,8,\dots,v+6$ , or on the antenna ports indicated in Table 6.3.4.4-1, where  $v$  is the number of layers used for transmission of the PDSCH;
- are present and are a valid reference for PDSCH demodulation only if the PDSCH transmission is associated with the corresponding antenna port according to clause 7.1 of TS 36.213 [4];

- are transmitted only on the physical resource blocks upon which the corresponding PDSCH is mapped.

A UE-specific reference signal associated with PDSCH is not transmitted in resource elements  $(k, l)$  in which one of the physical channels or physical signals other than the UE-specific reference signals defined in 6.1 are transmitted using resource elements with the same index pair  $(k, l)$  regardless of their antenna port  $p$ .

A UE-specific reference signal associated with subslot-PDSCH or slot-PDSCH is only transmitted in physical resource blocks in frequency domain assigned for PDSCH transmission where

- the assignment maps to both physical resource blocks of a given PRG (see clause 6.4.2);
- in case of subslot-PDSCH, the associated SPDCCH is not mapped to resource elements of a given PRG assigned for PDSCH transmission (see clause 6.4.2)..

For frame structure type 3, for PDSCH in a subframe with the same duration as the DwPTS duration of a special subframe configuration, the UE-specific reference signals are defined the same as that for the corresponding special subframe configuration.

### 6.10.3.1 Sequence generation

For antenna port 5, the UE-specific reference-signal sequence  $r_{n_s}(m)$  is defined by

$$r_{n_s}(m) = \frac{1}{\sqrt{2}}(1 - 2 \cdot c(2m)) + j \frac{1}{\sqrt{2}}(1 - 2 \cdot c(2m+1)), \quad m = 0, 1, \dots, 12N_{\text{RB}}^{\text{PDSCH}} - 1$$

where  $N_{\text{RB}}^{\text{PDSCH}}$  denotes the assigned bandwidth in resource blocks of the corresponding PDSCH transmission. The pseudo-random sequence  $c(i)$  is defined in clause 7.2. The pseudo-random sequence generator shall be initialised with  $c_{\text{init}} = (\lfloor n_s/2 \rfloor + 1) \cdot (2N_{\text{ID}}^{\text{cell}} + 1) \cdot 2^{16} + n_{\text{RNTI}}$  at the start of each subframe where  $n_{\text{RNTI}}$  is as described in clause 7.1 TS 36.213 [4].

For any of the antenna ports  $p \in \{7, 8, \dots, 14\}$ , the reference-signal sequence  $r(m)$  is defined by

$$r(m) = \frac{1}{\sqrt{2}}(1 - 2 \cdot c(2m)) + j \frac{1}{\sqrt{2}}(1 - 2 \cdot c(2m+1)), \quad m = \begin{cases} 0, 1, \dots, 12N_{\text{RB}}^{\text{max,DL}} - 1 & \text{normal cyclic prefix} \\ 0, 1, \dots, 16N_{\text{RB}}^{\text{max,DL}} - 1 & \text{extended cyclic prefix} \end{cases}$$

The pseudo-random sequence  $c(i)$  is defined in clause 7.2. The pseudo-random sequence generator shall be initialised with

$$c_{\text{init}} = (\lfloor n_s/2 \rfloor + 1) \cdot (2n_{\text{ID}}^{(n_{\text{SCID}})} + 1) \cdot 2^{16} + n_{\text{SCID}}$$

at the start of each subframe.

For BL/CE UEs, the same scrambling sequence is applied per subframe to the UE-specific reference-signal sequence for a given block of  $N_{\text{acc}}$  subframes. The subframe number of the first subframe in each block of  $N_{\text{acc}}$  consecutive subframes, denoted as  $n_{\text{abs},1}$ , satisfies  $(n_{\text{abs},1} + i_{\Delta}) \bmod N_{\text{acc}} = 0$ . For the  $j^{\text{th}}$  block of  $N_{\text{acc}}$  subframes, the scrambling sequence generator shall be initialised with

$$c_{\text{init}} = ((j_0 + j)N_{\text{acc}} \bmod 10 + 1) \cdot (2N_{\text{ID}}^{\text{cell}} + 1) \cdot 2^{16} + n_{\text{SCID}}$$

where

$$j = 0, 1, \dots, \left\lfloor \frac{i_0 + N_{\text{abs}}^{\text{PDSCH}} + i_{\Delta} - 1}{N_{\text{acc}}} \right\rfloor - j_0$$

$$j_0 = \lfloor (i_0 + i_{\Delta}) / N_{\text{acc}} \rfloor$$

$$i_{\Delta} = \begin{cases} 0, & \text{for frame structure type 1 or } N_{\text{acc}} = 1 \\ N_{\text{acc}} - 2, & \text{for frame structure type 2 and } N_{\text{acc}} = 10 \end{cases}$$

and  $i_0$  is the absolute subframe number of the first downlink subframe intended for PDSCH. The PDSCH transmissions span  $N_{\text{abs}}^{\text{PDSCH}}$  consecutive subframes, including subframes that are not BL/CE DL subframes where the PDSCH transmission is postponed. For a BL/CE UE configured in CEModeA,  $N_{\text{acc}} = 1$ . For a BL/CE UE configured with CEModeB,  $N_{\text{acc}} = 4$  for frame structure type 1 and  $N_{\text{acc}} = 10$  for frame structure type 2.

The quantities  $n_{\text{ID}}^{(i)}$ ,  $i = 0, 1$ , are given by

- $n_{\text{ID}}^{(i)} = N_{\text{ID}}^{\text{cell}}$  if no value for  $n_{\text{ID}}^{\text{DMRS},i}$  is provided by higher layers or if DCI format 1A, 2B or 2C is used for the DCI associated with the PDSCH transmission
- $n_{\text{ID}}^{(i)} = n_{\text{ID}}^{\text{DMRS},i}$  otherwise

The value of  $n_{\text{SCID}}$  is zero unless specified otherwise. For a PDSCH transmission on ports 7 or 8,  $n_{\text{SCID}}$  is given by the DCI format 2B, 2C, 2D, 6-1A, 7-1E, 7-1F and 7-1G in TS 36.212 [3] associated with the PDSCH transmission. In the case of DCI format 2B or 7-1E,  $n_{\text{SCID}}$  is indicated by the scrambling identity field according to Table 6.10.3.1-1. In the case of DCI format 2C or 2D,  $n_{\text{SCID}}$  is given by Table 5.3.3.1.5C-1, Table 5.3.3.1.5C-2 or Table 5.3.3.1.5C-6 in TS 36.212 [3]. In the case of DCI format 7-1F or 7-1G,  $n_{\text{SCID}}$  is given by Table 5.3.3.1.22-1, Table 5.3.3.1.22-2, Table 5.3.3.1.22-3 or Table 5.3.3.1.5C-6 in TS 36.212 [3]. For a PDSCH transmission on ports 11 or 13,  $n_{\text{SCID}}$  is given by the DCI format 2C or 2D in TS 36.212 [3] associated with the PDSCH transmission where  $n_{\text{SCID}}$  is given by Table 5.3.3.1.5C-2 in TS 36.212 [3].

**Table 6.10.3.1-1: Mapping of scrambling identity field in DCI format 2B to  $n_{\text{SCID}}$  values for antenna ports 7 and 8**

| Scrambling identity field in DCI format 2B (TS 36.212 [3]) | $n_{\text{SCID}}$ |
|------------------------------------------------------------|-------------------|
| 0                                                          | 0                 |
| 1                                                          | 1                 |

### 6.10.3.2 Mapping to resource elements

For antenna port 5, in a physical resource block with frequency-domain index  $n_{\text{PRB}}$  assigned for the corresponding PDSCH transmission, the reference signal sequence  $r_{n_s}(m)$  shall be mapped to complex-valued modulation symbols  $a_{k,l}^{(p)}$  with  $p = 5$  in a subframe according to:

Normal cyclic prefix:

$$a_{k,l}^{(p)} = r_{n_s}(3 \cdot l' \cdot N_{\text{RB}}^{\text{PDSCH}} + m')$$

$$k = (k') \bmod N_{\text{sc}}^{\text{RB}} + N_{\text{sc}}^{\text{RB}} \cdot n_{\text{PRB}}$$

$$k' = \begin{cases} 4m' + v_{\text{shift}} & \text{if } l \in \{2, 3\} \\ 4m' + (2 + v_{\text{shift}}) \bmod 4 & \text{if } l \in \{5, 6\} \end{cases}$$

$$l = \begin{cases} 3 & l' = 0 \\ 6 & l' = 1 \\ 2 & l' = 2 \\ 5 & l' = 3 \end{cases}$$

$$l' = \begin{cases} 0, 1 & \text{if } n_s \bmod 2 = 0 \\ 2, 3 & \text{if } n_s \bmod 2 = 1 \end{cases}$$

$$m' = 0, 1, \dots, 3N_{\text{RB}}^{\text{PDSCH}} - 1$$

Extended cyclic prefix:

$$a_{k,l}^{(p)} = r_{n_s} (4 \cdot l' \cdot N_{\text{RB}}^{\text{PDSCH}} + m')$$

$$k = (k') \bmod N_{\text{sc}}^{\text{RB}} + N_{\text{sc}}^{\text{RB}} \cdot n_{\text{PRB}}$$

$$k' = \begin{cases} 3m' + v_{\text{shift}} & \text{if } l = 4 \\ 3m' + (2 + v_{\text{shift}}) \bmod 3 & \text{if } l = 1 \end{cases}$$

$$l = \begin{cases} 4 & l' \in \{0, 2\} \\ 1 & l' = 1 \end{cases}$$

$$l' = \begin{cases} 0 & \text{if } n_s \bmod 2 = 0 \\ 1, 2 & \text{if } n_s \bmod 2 = 1 \end{cases}$$

$$m' = 0, 1, \dots, 4N_{\text{RB}}^{\text{PDSCH}} - 1$$

where  $m'$  is the counter of UE-specific reference signal resource elements within a respective OFDM symbol of the PDSCH transmission.

The cell-specific frequency shift is given by  $v_{\text{shift}} = N_{\text{ID}}^{\text{cell}} \bmod 3$ .

The mapping shall be in increasing order of the frequency-domain index  $n_{\text{PRB}}$  of the physical resource blocks assigned for the corresponding PDSCH transmission. The quantity  $N_{\text{RB}}^{\text{PDSCH}}$  denotes the assigned bandwidth in resource blocks of the corresponding PDSCH transmission.

Figure 6.10.3.2-1 illustrates the resource elements used for UE-specific reference signals for normal cyclic prefix for antenna port 5.

Figure 6.10.3.2-2 illustrates the resource elements used for UE-specific reference signals for extended cyclic prefix for antenna port 5.

The notation  $R_p$  is used to denote a resource element used for reference signal transmission on antenna port  $p$ .


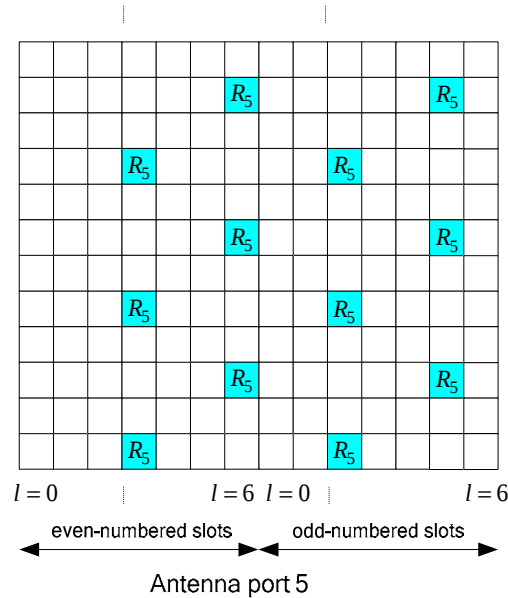


Figure 6.10.3.2-1: Mapping of UE-specific reference signals, antenna port 5 (normal cyclic prefix)

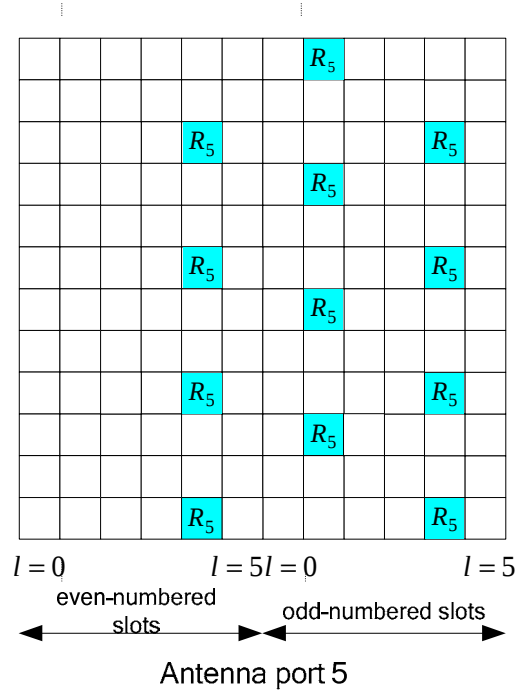

**Figure 6.10.3.2-2: Mapping of UE-specific reference signals, antenna port 5 (extended cyclic prefix)**

For antenna ports  $p = 7$ ,  $p = 8$ ,  $p = 11$ ,  $p = 13$ ,  $p = \{11, 13\}$ ,  $p = 7, 8, \dots, v+6$ , or the antenna ports indicated in Table 6.3.4.4-1 in a physical resource block with frequency-domain index  $n_{\text{PRB}}$  assigned for the corresponding PDSCH transmission, a part of the reference signal sequence  $r(m)$  shall be mapped to complex-valued modulation symbols  $a_{k,l}^{(p)}$  in a subframe according to

Normal cyclic prefix:

$$a_{k,l}^{(p)} = w_p(l') \cdot r(3 \cdot l' \cdot N_{\text{RB}}^{\text{max,DL}} + 3 \cdot n_{\text{PRB}} + m')$$

where

$$w_p(i) = \begin{cases} \bar{w}_p(i) & (m' + n_{\text{PRB}}) \bmod 2 = 0 \\ \bar{w}_p(3-i) & (m' + n_{\text{PRB}}) \bmod 2 = 1 \end{cases}$$

$$k = 5m' + N_{\text{sc}}^{\text{RB}} n_{\text{PRB}} + k'$$

$$k' = \begin{cases} 1 & p \in \{7, 8, 11, 13\} \\ 0 & p \in \{9, 10, 12, 14\} \end{cases}$$

$$l = \begin{cases} l' \bmod 2 + 2 & \text{if in a special subframe with configuration 3, 4, 8, 9 or 10 (see Table 4.2 - 1)} \\ l' \bmod 2 + 2 + 3 \lfloor l' / 2 \rfloor & \text{if in a special subframe with configuration 1, 2, 6, or 7 (see Table 4.2 - 1)} \\ l' \bmod 2 + 5 & \text{if not in a special subframe} \end{cases}$$

$$l' = \begin{cases} 0, 1, 2, 3 & \text{if } n_s \bmod 2 = 0 \text{ and in a special subframe with configuration 1, 2, 6, or 7 (see Table 4.2 - 1)} \\ 0, 1 & \text{if } n_s \bmod 2 = 0 \text{ and not in special subframe with configuration 1, 2, 6, or 7 (see Table 4.2 - 1)} \\ 2, 3 & \text{if } n_s \bmod 2 = 1 \text{ and not in special subframe with configuration 1, 2, 6, or 7 (see Table 4.2 - 1)} \end{cases}$$

$$m' = 0, 1, 2$$

The sequence  $\bar{w}_p(i)$  is given by Table 6.10.3.2-1.

**Table 6.10.3.2-1: The sequence  $\bar{w}_p(i)$  for normal cyclic prefix**

| Antenna port $p$ | $\bar{w}_p(0)$ $\bar{w}_p(1)$ $\bar{w}_p(2)$ $\bar{w}_p(3)$ |
|------------------|-------------------------------------------------------------|
| 7                | [+1 +1 +1 +1]                                               |
| 8                | [+1 -1 +1 -1]                                               |
| 9                | [+1 +1 +1 +1]                                               |
| 10               | [+1 -1 +1 -1]                                               |
| 11               | [+1 +1 -1 -1]                                               |
| 12               | [-1 -1 +1 +1]                                               |
| 13               | [+1 -1 -1 +1]                                               |
| 14               | [-1 +1 +1 -1]                                               |

Extended cyclic prefix:

$$a_{k,l}^{(p)} = w_p(l' \bmod 2) \cdot r(4 \cdot l' \cdot N_{\text{RB}}^{\text{max,DL}} + 4 \cdot n_{\text{PRB}} + m')$$

where

$$w_p(i) = \begin{cases} \bar{w}_p(i) & m' \bmod 2 = 0 \\ \bar{w}_p(1-i) & m' \bmod 2 = 1 \end{cases}$$

$$k = 3m' + N_{\text{sc}}^{\text{RB}} n_{\text{PRB}} + k'$$

$$k' = \begin{cases} 1 & \text{if } n_s \bmod 2 = 0 \text{ and } p \in \{7,8\} \\ 2 & \text{if } n_s \bmod 2 = 1 \text{ and } p \in \{7,8\} \end{cases}$$

$$l = l' \bmod 2 + 4$$

$$l' = \begin{cases} 0,1 & \text{if } n_s \bmod 2 = 0 \text{ and in a special subframe with configuration 1, 2, 3, 5 or 6 (see Table 4.2 - 1)} \\ 0,1 & \text{if } n_s \bmod 2 = 0 \text{ and not in a special subframe} \\ 2,3 & \text{if } n_s \bmod 2 = 1 \text{ and not in a special subframe} \end{cases}$$

$$m' = 0,1,2,3$$

The sequence  $\bar{w}_p(i)$  is given by Table 6.10.3.2-2.

**Table 6.10.3.2-2: The sequence  $\bar{w}_p(i)$  for extended cyclic prefix and for slot/subslot-PDSCH**

| Antenna port $p$ | $\bar{w}_p(0)$ $\bar{w}_p(1)$ |
|------------------|-------------------------------|
| 7                | [+1 +1]                       |
| 8                | [-1 +1]                       |
| 9                | [+1 +1]                       |
| 10               | [-1 +1]                       |

For extended cyclic prefix, UE-specific reference signals are not supported on antenna ports 9 to 14.

For slot-PDSCH transmission, the baseline pattern (see 'Baseline' in Figure 6.10.3.2-2A) of UE-specific reference signals is defined as follows. It is applied in MBSFN subframes.

$$a_{k,l}^{(p)} = w_p(l') \cdot r(3 \cdot l' \cdot N_{\text{RB}}^{\text{max,DL}} + 3 \cdot n_{\text{PRB}} + m')$$

where

$$w_p(i) = \begin{cases} \bar{w}_p(i) & m' \bmod 2 = 0 \\ \bar{w}_p(1-i) & m' \bmod 2 = 1 \end{cases}$$

$$m' = 0,1,2$$

- $l' = 0, 1$
- $l = l_0 + l'$
- $k' = \begin{cases} 1 & p \in \{7, 8\} \\ 0 & p \in \{9, 10\} \end{cases}$
- $k = 5m' + N_{sc}^{RB} n_{PRB} + k'$


and

- $l_0 = 3$  if the slot where the PDSCH is transmitted in ( $n_s$ ) fulfils  $n_s \bmod 2 = 0$
- $l_0 = 2$  if the slot where the PDSCH is transmitted in ( $n_s$ ) fulfils  $n_s \bmod 2 = 1$

The sequence  $\bar{w}_p(i)$  is given by Table 6.10.3.2-2.

For slot-PDSCH transmission in normal subframes,  $a_{k,l}^{(p)}$  is generated as for the baseline slot-PDSCH UE-specific reference signal pattern for the same values of  $l$ , while  $k$  is given by  $k = N_{sc}^{RB} n_{PRB} + k'$  and depends on the cell-specific frequency shift  $v_{\text{shift}}$  as follows (see 'v0', 'v1' and 'v2' in Figure 6.10.3.2-2A for  $v_{\text{shift}} \bmod 3 = 0$ ,  $v_{\text{shift}} \bmod 3 = 1$ , and  $v_{\text{shift}} \bmod 3 = 2$ , respectively):

- For  $v_{\text{shift}} \bmod 3 = 0$ ,  $k' = \begin{cases} 2, 7, 11 & p \in \{7, 8\} \\ 1, 5, 10 & p \in \{9, 10\} \end{cases}$
- For  $v_{\text{shift}} \bmod 3 = 1$ ,  $k' = \begin{cases} 2, 6, 11 & p \in \{7, 8\} \\ 0, 5, 9 & p \in \{9, 10\} \end{cases}$
- For  $v_{\text{shift}} \bmod 3 = 2$ ,  $k' = \begin{cases} 1, 6, 10 & p \in \{7, 8\} \\ 0, 4, 9 & p \in \{9, 10\} \end{cases}$

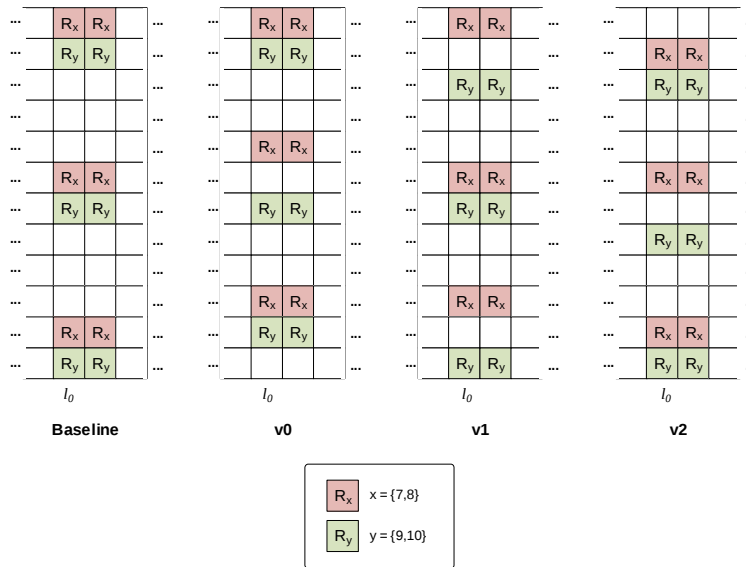

**Figure 6.10.3.2-2A: Mapping of UE-specific reference signals for slot-PDSCH, antenna ports 7, 8, 9 and 10 (normal cyclic prefix)**

For subslot-PDSCH transmission, the baseline pattern (see 'Baseline' in Figure 6.10.3.2-2B) of UE-specific reference signals is defined as follows. It is applied if the presence of UE-specific reference signals is indicated in the DCI associated with the subslot-PDSCH (see *DMRS position indicator* field in TS 36.212 [3]), and in downlink subslots where the baseline pattern, including all the REs associated with  $p \in \{7, 8\}$  if the parameter *maxLayersMIMO-STTI* is configured with 2 layers, or  $p \in \{7, 8, 9, 10\}$  if the parameter *maxLayersMIMO-STTI* is configured with 4 layers, has

no overlapping resource element with CRS and no overlapping resource element with configured zero-power and non-zero-power CSI reference signals:

$$a_{k,l}^{(p)} = w_p(l') \cdot r(2 \cdot l' \cdot N_{\text{RB}}^{\text{max,DL}} + 2 \cdot n_{\text{PRB}} + m')$$

where

$$w_p(i) = \begin{cases} \bar{w}_p(i) & m' \bmod 2 = 0 \\ \bar{w}_p(1-i) & m' \bmod 2 = 1 \end{cases}$$

$$k = 7m' + N_{\text{sc}}^{\text{RB}} n_{\text{PRB}} + k' + 2 \cdot (n_{\text{PRB}} \bmod 2)$$

$$k' = \begin{cases} 1 & p \in \{7,8\} \\ 0 & p \in \{9,10\} \end{cases}$$

$$l = l' + l_0 \text{ (see Table 6.4.2 - 1)}$$


$$l' = 0,1$$

$$m' = 0,1$$

The sequence  $\bar{w}_p(i)$  is given by Table 6.10.3.2-2. For subslot-PDSCH transmission in normal subframes, in downlink subslots where the baseline pattern, including all the REs associated with  $p \in \{7,8\}$  if the parameter *maxLayersMIMO-STTI* is configured with 2 layers, or  $p \in \{7,8,9,10\}$  if the parameter *maxLayersMIMO-STTI* is configured with 4 layers, has overlapping resource elements with configured zero-power or non-zero-power CSI reference signals or has overlapping resource elements with CRS, if the presence of UE-specific reference signals is indicated in the DCI associated (see *DMRS position indicator* field in TS 36.212 [3]) with the subslot-PDSCH, a shifted pattern of UE-specific reference signals is applied. In the shifted pattern,  $a_{k,l}^{(p)}$  is generated as for the baseline subslot-PDSCH UE-specific reference signal pattern for the same value of  $l$ , while  $k$  is given by  $k = N_{\text{sc}}^{\text{RB}} n_{\text{PRB}} + k'$  and depends on the cell-specific frequency shift  $v_{\text{shift}}$  as follows (see also 'v0', 'v1' and 'v2' in Figure 6.10.3.2-2B for  $v_{\text{shift}} \bmod 3 = 0$ ,  $v_{\text{shift}} \bmod 3 = 1$ , and  $v_{\text{shift}} \bmod 3 = 2$ , respectively):

$$\begin{aligned} \text{- For } v_{\text{shift}} \bmod 3 = 0, k' &= \begin{cases} 2, 8 & p \in \{7, 8\} \text{ and } n_{\text{PRB}} \bmod 2 = 0 \\ 4, 11 & p \in \{7, 8\} \text{ and } n_{\text{PRB}} \bmod 2 = 1 \\ 1, 7 & p \in \{9, 10\} \text{ and } n_{\text{PRB}} \bmod 2 = 0 \\ 2, 10 & p \in \{9, 10\} \text{ and } n_{\text{PRB}} \bmod 2 = 1 \end{cases} \\ \text{- For } v_{\text{shift}} \bmod 3 = 1, k' &= \begin{cases} 2, 8 & p \in \{7, 8\} \text{ and } n_{\text{PRB}} \bmod 2 = 0 \\ 3, 11 & p \in \{7, 8\} \text{ and } n_{\text{PRB}} \bmod 2 = 1 \\ 0, 6 & p \in \{9, 10\} \text{ and } n_{\text{PRB}} \bmod 2 = 0 \\ 2, 9 & p \in \{9, 10\} \text{ and } n_{\text{PRB}} \bmod 2 = 1 \end{cases} \\ \text{- For } v_{\text{shift}} \bmod 3 = 2, k' &= \begin{cases} 1, 9 & p \in \{7, 8\} \text{ and } n_{\text{PRB}} \bmod 2 = 0 \\ 3, 10 & p \in \{7, 8\} \text{ and } n_{\text{PRB}} \bmod 2 = 1 \\ 0, 7 & p \in \{9, 10\} \text{ and } n_{\text{PRB}} \bmod 2 = 0 \\ 1, 9 & p \in \{9, 10\} \text{ and } n_{\text{PRB}} \bmod 2 = 1 \end{cases} \end{aligned}$$

For subslot-PDSCH transmission in MBSFN subframes, in downlink subslots where the baseline pattern, including all the REs associated with  $p \in \{7,8\}$  if the parameter *maxLayersMIMO-STTI* is configured with 2 layers, or  $p \in \{7,8,9,10\}$  if the parameter *maxLayersMIMO-STTI* is configured with 4 layers, has overlapping resource elements with configured zero-power or non-zero-power CSI reference signals, if the presence of UE-specific reference signals is indicated in the DCI associated (see *DMRS position indicator* field in TS 36.212 [3]) with the subslot-PDSCH, the shifted pattern of UE-specific reference signals for  $v_{\text{shift}} = 0$ , as defined above, is applied (see 'v0' in Figure 6.10.3.2-2B for  $v_{\text{shift}} \bmod 3 = 0$ ).

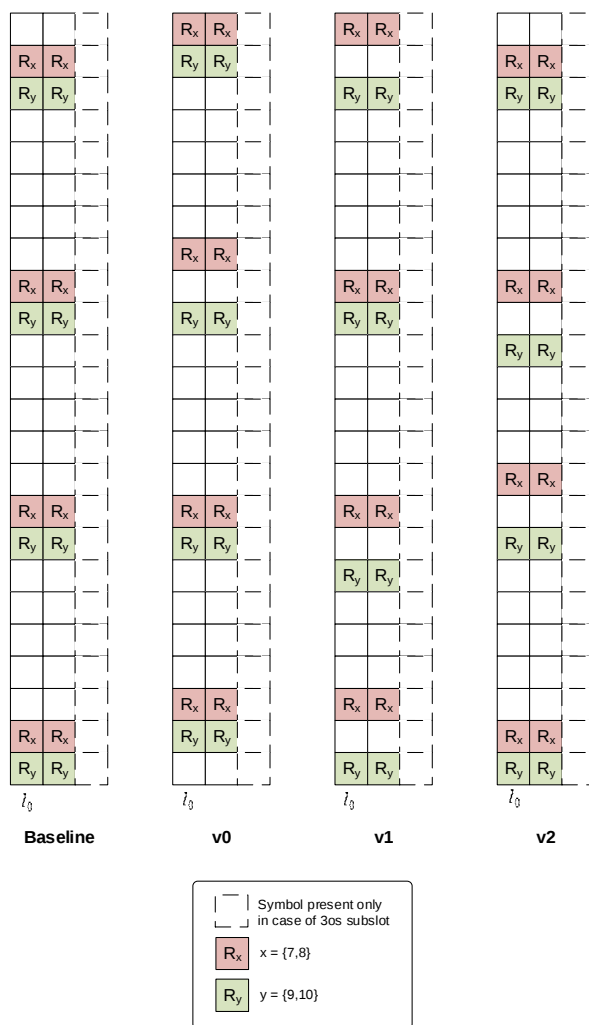

**Figure 6.10.3.2-2B: Mapping of UE-specific reference signals for subslot-PDSCH, antenna ports 7, 8, 9 and 10 (normal cyclic prefix)**

Resource elements  $(k, l)$  used for transmission of UE-specific reference signals to one UE on any of the antenna ports in the set  $S$ , where  $S = \{7,8,11,13\}$  or  $S = \{9,10,12,14\}$  shall

- not be used for transmission of PDSCH on any antenna port in the same slot, and
- not be used for UE-specific reference signals to the same UE on any antenna port other than those in  $S$  in the same slot.

Figure 6.10.3.2-3 illustrates the resource elements used for UE-specific reference signals for normal cyclic prefix for antenna ports 7, 8, 9 and 10. Figure 6.10.3.2-4 illustrates the resource elements used for UE-specific reference signals for extended cyclic prefix for antenna ports 7, 8.

For BL/CE UEs, if downlink resource reservation is enabled for the UE as specified in [9], and the Resource reservation field in the DCI is set to 1, then in case of PDSCH transmission associated with C-RNTI or SPS C-RNTI using UE-specific MPDCCH search space including PDSCH transmission without a corresponding MPDCCH,

- If all OFDM symbols in a PRB are reserved, the demodulation reference signal transmission in that PRB is dropped.

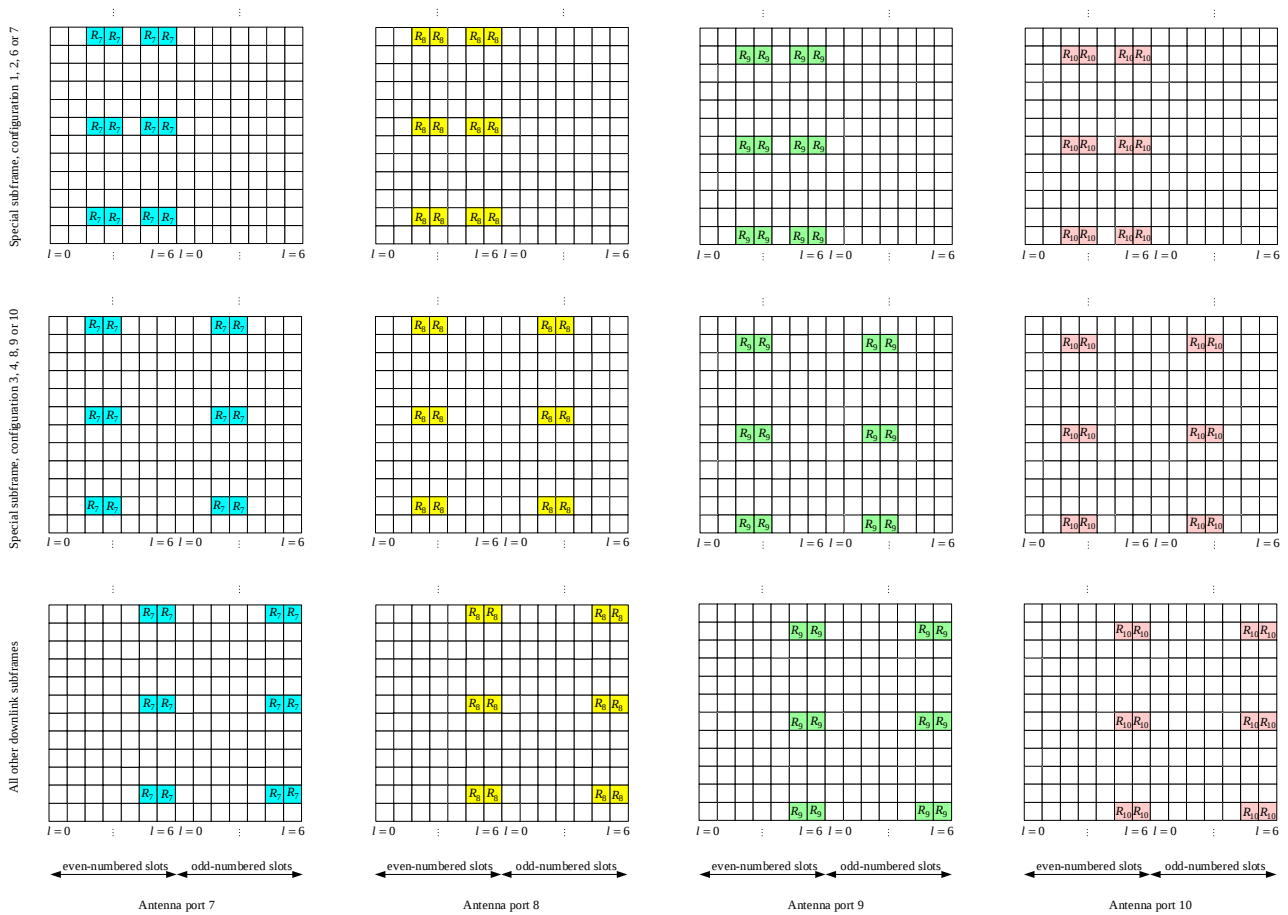


Figure 6.10.3.2-3: Mapping of UE-specific reference signals, antenna ports 7, 8, 9 and 10 (normal cyclic prefix)

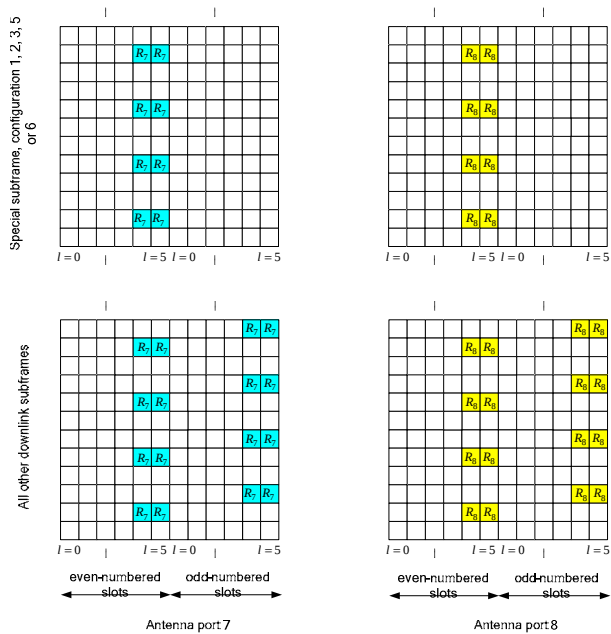


Figure 6.10.3.2-4: Mapping of UE-specific reference signals, antenna ports 7 and 8 (extended cyclic prefix)

### 6.10.3A Demodulation reference signals associated with EPDCCH, MPDCCH, or SPDCCH

The demodulation reference signal associated with EPDCCH/MPDCCH/SPDCCH

- is transmitted on the same antenna port  $p \in \{107, 108, 109, 110\}$  as the associated EPDCCH/MPDCCH/SPDCCH physical resource;
- is present and is a valid reference for EPDCCH/MPDCCH/SPDCCH demodulation only if the EPDCCH/MPDCCH/SPDCCH transmission is associated with the corresponding antenna port;
- is transmitted only on the physical resource blocks upon which the corresponding EPDCCH/MPDCCH/SPDCCH is mapped.

A demodulation reference signal associated with EPDCCH/MPDCCH/SPDCCH is not transmitted in resource elements  $(k, l)$  in which one of the physical channels or physical signals other than the demodulation reference signals defined in 6.1 are transmitted using resource elements with the same index pair  $(k, l)$  regardless of their antenna port  $p$ .

### 6.10.3A.1 Sequence generation

For any of the antenna ports  $p \in \{107, 108, 109, 110\}$ , the reference-signal sequence  $r(m)$  is defined by

$$r(m) = \frac{1}{\sqrt{2}} (1 - 2 \cdot c(2m)) + j \frac{1}{\sqrt{2}} (1 - 2 \cdot c(2m+1)), \quad m = \begin{cases} 0, 1, \dots, 12N_{\text{RB}}^{\text{max,DL}} - 1 & \text{normal cyclic prefix} \\ 0, 1, \dots, 16N_{\text{RB}}^{\text{max,DL}} - 1 & \text{extended cyclic prefix} \end{cases}.$$

For non-BL/CE UEs, the pseudo-random sequence  $c(n)$  is defined in clause 7.2. The pseudo-random sequence generator shall be initialised with

$$c_{\text{init}} = (\lfloor n_s / 2 \rfloor + 1) \cdot (2n_{\text{ID},i}^{\text{xPDCCCH}} + 1) \cdot 2^{16} + n_{\text{SCID}}^{\text{xPDCCCH}}$$

at the start of each subframe where

- $n_{\text{ID},i}^{\text{xPDCCCH}}$  and  $n_{\text{SCID}}^{\text{xPDCCCH}}$  shall be replaced by  $n_{\text{ID},i}^{\text{EPDCCCH}}$  and  $n_{\text{SCID}}^{\text{EPDCCCH}}$ , respectively, for the EPDCCH
- $n_{\text{ID},i}^{\text{xPDCCCH}}$  and  $n_{\text{SCID}}^{\text{xPDCCCH}}$  shall be replaced by  $n_{\text{ID},i}^{\text{SPDCCCH}}$  and  $n_{\text{SCID}}^{\text{SPDCCCH}}$ , respectively, for the SPDCCCH
- $n_{\text{SCID}}^{\text{EPDCCCH}} = 2$ ,  $n_{\text{SCID}}^{\text{SPDCCCH}} = 2$ , and
- $n_{\text{ID},i}^{\text{EPDCCCH}}$  is configured by higher layers.

The EPDCCH/SPDCCCH set to which the EPDCCH/SPDCCCH associated with the demodulation reference signal belong is denoted  $i \in \{0, 1\}$ .

For BL/CE UEs, the same scrambling sequence is applied per subframe to the demodulation reference signal associated with MPDCCH for a given block of  $N_{\text{acc}}$  subframes. The subframe number of the first subframe in each block of  $N_{\text{acc}}$  consecutive subframes, denoted as  $n_{\text{abs},1}$  satisfies  $(n_{\text{abs},1} + i_{\Delta}) \bmod N_{\text{acc}} = 0$ . For the  $j^{\text{th}}$  block of  $N_{\text{acc}}$  subframes, the scrambling sequence generator shall be initialised with

$$c_{\text{init}} = \begin{cases} ((j_0 + j)N_{\text{acc}} \bmod 0 + 1) \cdot (2n_{\text{ID},i}^{\text{MPDCCCH}} + 1) \cdot 2^{16} + n_{\text{SCID}}^{\text{MPDCCCH}} & \text{otherwise} \\ ((j_0 + j)N_{\text{acc}} \bmod 0 + 1) \cdot (2N_{\text{ID}}^{\text{cell}} + 1) \cdot 2^{16} + n_{\text{SCID}}^{\text{MPDCCCH}} & \text{for Type 1 Common and Type 2 Common} \end{cases} \quad \text{where}$$

$$j = 0, 1, \dots, \left\lfloor \frac{i_0 + N_{\text{abs}}^{\text{MPDCCCH}} + i_{\Delta} - 1}{N_{\text{acc}}} \right\rfloor - j_0$$

$$j_0 = \lfloor (i_0 + i_{\Delta}) / N_{\text{acc}} \rfloor$$

$$i_{\Delta} = \begin{cases} 0, & \text{for frame structure type 1 or } N_{\text{acc}} = 1 \\ N_{\text{acc}} - 2, & \text{for frame structure type 2 and } N_{\text{acc}} = 10 \end{cases}$$

and  $i_0$  is the absolute subframe number of the first downlink subframe intended for MPDCCH. The MPDCCH transmissions span  $N_{\text{abs}}^{\text{MPDCCH}}$  consecutive subframes, including subframes that are not BL/CE DL subframes where the MPDCCH transmission is postponed.

For BL/CE UEs,

- if the MPDCCH transmission is associated with P-RNTI or SC-RNTI:
  - $N_{\text{acc}} = 4$  for frame structure type 1 and  $N_{\text{acc}} = 10$  for frame structure type 2
- otherwise
  - $N_{\text{acc}} = 1$  for UEs assuming CEModeA (according to the definition in Clause 12 of [4]) or configured with CEModeA.
  - $N_{\text{acc}} = 4$  for frame structure type 1 and  $N_{\text{acc}} = 10$  for frame structure type 2 for UEs assuming CEModeB (according to the definition in Clause 12 of [4]) or configured with CEModeB.

The quantities  $n_{\text{SCID}}^{\text{MPDCCH}} = 2$  and  $n_{\text{ID}i}^{\text{MPDCCH}}$  are configured by higher layers. The MPDCCH set to which the MPDCCH associated with the demodulation reference signal belong is denoted  $i \in \{0,1\}$ . For an MPDCCH associated with a 2+4 PRB set as defined in [4],  $i=0$  is used to generate the scrambling sequence for the 6 PRBs as well as for the 2 PRBs and 4 PRBs.

### 6.10.3A.2 Mapping to resource elements

For the antenna port  $p \in \{107,108,109,110\}$  in a physical resource block  $n_{\text{PRB}}$  assigned for the associated EPDCCH/MPDCCH, a part of the reference signal sequence  $r(m)$  shall be mapped to complex-valued modulation symbols  $a_{k,l}^{(p)}$  in a subframe according to

Normal cyclic prefix:

$$a_{k,l}^{(p)} = w_p(l') \cdot r(3 \cdot l' \cdot N_{\text{RB}}^{\text{maxDL}} + 3 \cdot n_{\text{PRB}} + m')$$

where

$$w_p(i) = \begin{cases} \overline{w}_p(i) & (m' + n_{\text{PRB}}) \bmod 2 = 0 \\ \overline{w}_p(3-i) & (m' + n_{\text{PRB}}) \bmod 2 = 1 \end{cases}$$

$$k = 5m' + N_{\text{sc}}^{\text{RB}} n_{\text{PRB}} + k'$$

$$k' = \begin{cases} 1 & p \in \{107,108\} \\ 0 & p \in \{109,110\} \end{cases}$$

$$l = \begin{cases} l' \bmod 2 + 2 & \text{if in a special subframe with configuration 3, 4, 8, 9 or 10 (see Table 4.2 - 1)} \\ l' \bmod 2 + 2 + 3 \lfloor l' / 2 \rfloor & \text{if in a special subframe with configuration 1, 2, 6, or 7 (see Table 4.2 - 1)} \\ l' \bmod 2 + 5 & \text{if not in a special subframe} \end{cases}$$

$$l' = \begin{cases} 0,1,2,3 & \text{if } n_s \bmod 2 = 0 \text{ and in a special subframe with configuration 1, 2, 6, or 7 (see Table 4.2 - 1)} \\ 0,1 & \text{if } n_s \bmod 2 = 0 \text{ and not in special subframe with configuration 1, 2, 6, or 7 (see Table 4.2 - 1)} \\ 2,3 & \text{if } n_s \bmod 2 = 1 \text{ and not in special subframe with configuration 1, 2, 6, or 7 (see Table 4.2 - 1)} \end{cases}$$

$$m' = 0,1,2$$

The sequence  $\overline{w}_p(i)$  is given by Table 6.10.3A.2-1.

**Table 6.10.3A.2-1: The sequence  $\overline{w}_p(i)$  for normal cyclic prefix**

| Antenna port $p$ | $\left[\overline{w}_p(0) \quad \overline{w}_p(1) \quad \overline{w}_p(2) \quad \overline{w}_p(3)\right]$ |
|------------------|----------------------------------------------------------------------------------------------------------|
| 107              | $[+1 \quad +1 \quad +1 \quad +1]$                                                                        |
| 108              | $[+1 \quad -1 \quad +1 \quad -1]$                                                                        |
| 109              | $[+1 \quad +1 \quad +1 \quad +1]$                                                                        |
| 110              | $[+1 \quad -1 \quad +1 \quad -1]$                                                                        |

Extended cyclic prefix:

$$a_{k,l}^{(p)} = w_p(l' \bmod 2) \cdot r(4 \cdot l' \cdot N_{\text{RB}}^{\text{max, DL}} + 4 \cdot n_{\text{PRB}} + m')$$

where

$$w_p(i) = \begin{cases} \overline{w}_p(i) & m' \bmod 2 = 0 \\ \overline{w}_p(1-i) & m' \bmod 2 = 1 \end{cases}$$

$$k = 3m' + N_{\text{sc}}^{\text{RB}} n_{\text{PRB}} + k'$$

$$k' = \begin{cases} 1 & \text{if } n_s \bmod 2 = 0 \text{ and } p \in \{107, 108\} \\ 2 & \text{if } n_s \bmod 2 = 1 \text{ and } p \in \{107, 108\} \end{cases}$$

$$l = l' \bmod 2 + 4$$

$$l' = \begin{cases} 0, 1 & \text{if } n_s \bmod 2 = 0 \text{ and in a special subframe with configuration 1, 2, 3, 5 or 6 (see Table 4.2 -1)} \\ 0, 1 & \text{if } n_s \bmod 2 = 0 \text{ and not in a special subframe} \\ 2, 3 & \text{if } n_s \bmod 2 = 1 \text{ and not in a special subframe} \end{cases}$$

$$m' = 0, 1, 2, 3$$

The sequence  $\overline{w}_p(i)$  is given by Table 6.10.3A.2-2.

**Table 6.10.3A.2-2: The sequence  $\overline{w}_p(i)$  for extended cyclic prefix**

| Antenna port $p$ | $\left[\overline{w}_p(0) \quad \overline{w}_p(1)\right]$ |
|------------------|----------------------------------------------------------|
| 107              | $[+1 \quad +1]$                                          |
| 108              | $[-1 \quad +1]$                                          |

For extended cyclic prefix, demodulation reference signals are not supported on antenna ports 109 to 110.

For the antenna port  $p=107$  in a physical resource block  $n_{\text{PRB}}$  assigned for the SPDCCH, a part of the reference signal sequence  $r(m)$  shall be mapped to complex-valued modulation symbols  $a_{k,l}^{(p)}$  in a subframe according to the procedure used for UE-specific reference signals associated with subslot-PDSCH on antenna port 7 described in clause 6.10.3.2 with the following amendments:

- for slot-SPDCCH,  $l=l'$ ,
- for slot-SPDCCH in MBSFN subframes, the procedure used for the baseline pattern of UE-specific reference signals associated with subslot-PDSCH is applied
- for slot-SPDCCH in normal subframes, the procedure used for the shifted pattern of UE-specific reference signals associated with subslot-PDSCH depending on the cell-specific frequency shift  $v_{\text{shift}}$  is applied.

Resource elements  $(k, l)$  used for transmission of demodulation reference signals to one UE on any of the antenna ports in the set  $S$ , where  $S = \{107, 108\}$  or  $S = \{109, 110\}$  shall

- not be used for transmission of EPDCCH/MPDCCH on any antenna port in the same slot, and
- not be used for demodulation reference signals to the same UE on any antenna port other than those in  $S$  in the

same slot.

Replacing antenna port numbers 7 – 10 by 107 – 110 in Figure 6.10.3.2-3 provides an illustration of the resource elements used for demodulation reference signals associated with EPDCCH/MPDCCH for normal cyclic prefix. Replacing antenna port numbers 7 – 8 by 107 – 108 in Figure 6.10.3.2-4 provides an illustration of the resource elements used for demodulation reference signals associated with EPDCCH/MPDCCH for extended cyclic prefix.

For frame structure type 3, for EPDCCH in a subframe with the same duration as the DwPTS duration of a special subframe configuration, the mapping of the demodulation reference signals to the resource elements is the same as that for the corresponding special subframe configuration.

For BL/CE UEs, if downlink resource reservation is enabled for the UE as specified in [9], then in case of MPDCCH transmission associated with C-RNTI or SPS C-RNTI using UE-specific MPDCCH search space,

- If all OFDM symbols in a PRB are reserved, the demodulation reference signal transmission in that PRB is dropped.

## 6.10.4 Positioning reference signals

Positioning reference signals shall only be transmitted in resource blocks in downlink subframes configured for positioning reference signal transmission. If both normal and MBSFN subframes are configured as positioning subframes within a cell, the OFDM symbols in a MBSFN subframe configured for positioning reference signal transmission shall use the same cyclic prefix as used for subframe #0. If only MBSFN subframes are configured as positioning subframes within a cell, the OFDM symbols configured for positioning reference signals in the MBSFN region of these subframes shall use extended cyclic prefix length. In a subframe configured for positioning reference signal transmission, the starting positions of the OFDM symbols configured for positioning reference signal transmission shall be identical to those in a subframe in which all OFDM symbols have the same cyclic prefix length as the OFDM symbols configured for positioning reference signal transmission.

Positioning reference signals are transmitted on antenna port 6.

The positioning reference signals shall not be mapped to resource elements  $(k, l)$  allocated to the core part of the PBCH, PSS or SSS regardless of their antenna port  $p$ .

Positioning reference signals are defined for  $\Delta f = 15\text{ kHz}$  only.

### 6.10.4.1 Sequence generation

The reference-signal sequence  $r_{l,n_s}(m)$  is defined by

$$r_{l,n_s}(m) = \frac{1}{\sqrt{2}}(1 - 2 \cdot c(2m)) + j \frac{1}{\sqrt{2}}(1 - 2 \cdot c(2m+1)), \quad m = 0, 1, \dots, 2N_{\text{RB}}^{\text{max,DL}} - 1$$

where  $n_s$  is the slot number within a radio frame,  $l$  is the OFDM symbol number within the slot. The pseudo-random sequence  $c(i)$  is defined in clause 7.2. The pseudo-random sequence generator shall be initialised with

$c_{\text{init}} = 2^{28} \cdot \lfloor N_{\text{ID}}^{\text{PRS}} / 512 \rfloor + 2^{10} \cdot (7 \cdot (n_s + 1) + l + 1) \cdot (2 \cdot (N_{\text{ID}}^{\text{PRS}} \bmod 512) + 1) + 2 \cdot (N_{\text{ID}}^{\text{PRS}} \bmod 512) + N_{\text{CP}}$  at the start of each OFDM symbol where  $N_{\text{ID}}^{\text{PRS}} \in \{0, 1, \dots, 4095\}$  equals  $N_{\text{ID}}^{\text{cell}}$  unless configured by higher layers and where

$$N_{\text{CP}} = \begin{cases} 1 & \text{for normal CP} \\ 0 & \text{for extended CP} \end{cases}$$

### 6.10.4.2 Mapping to resource elements

If PRS frequency hopping is not configured by higher layers, the reference signal sequence  $r_{l,n_s}(m)$  shall be mapped to complex-valued modulation symbols  $a_{k,l}^{(p)}$  used as reference signal for antenna port  $p = 6$  in slot  $n_s$  according to

$$a_{k,l}^{(p)} = r_{l,n_s}(m')$$

where

Normal cyclic prefix:

$$\begin{aligned}
 k &= 6(m + N_{\text{RB}}^{\text{DL}} - N_{\text{RB}}^{\text{PRS}}) + (6 - l + v_{\text{shift}}) \bmod 6 \\
 l &= \begin{cases} 3,5,6 & \text{if } n_s \bmod 2 = 0 \\ 1,2,3,5,6 & \text{if } n_s \bmod 2 = 1 \text{ and (1 or 2 PBCH antenna ports)} \\ 2,3,5,6 & \text{if } n_s \bmod 2 = 1 \text{ and (4 PBCH antenna ports)} \end{cases} \\
 m &= 0, 1, \dots, 2 \cdot N_{\text{RB}}^{\text{PRS}} - 1 \\
 m' &= m + N_{\text{RB}}^{\text{max,DL}} - N_{\text{RB}}^{\text{PRS}}
 \end{aligned}$$

Extended cyclic prefix:

$$\begin{aligned}
 k &= 6(m + N_{\text{RB}}^{\text{DL}} - N_{\text{RB}}^{\text{PRS}}) + (5 - l + v_{\text{shift}}) \bmod 6 \\
 l &= \begin{cases} 4,5 & \text{if } n_s \bmod 2 = 0 \\ 1,2,4,5 & \text{if } n_s \bmod 2 = 1 \text{ and (1 or 2 PBCH antenna ports)} \\ 2,4,5 & \text{if } n_s \bmod 2 = 1 \text{ and (4 PBCH antenna ports)} \end{cases} \\
 m &= 0, 1, \dots, 2 \cdot N_{\text{RB}}^{\text{PRS}} - 1 \\
 m' &= m + N_{\text{RB}}^{\text{max,DL}} - N_{\text{RB}}^{\text{PRS}}
 \end{aligned}$$

The bandwidth for positioning reference signals  $N_{\text{RB}}^{\text{PRS}}$  is configured by higher layers and the cell-specific frequency shift is given by  $v_{\text{shift}} = N_{\text{ID}}^{\text{PRS}} \bmod 6$  where  $N_{\text{ID}}^{\text{PRS}} = N_{\text{ID}}^{\text{cell}}$  if no value for  $N_{\text{ID}}^{\text{PRS}}$  is configured by higher layers.

If PRS frequency hopping is configured by higher layers, a PRS frequency hopping configuration provided by higher layers contains the following:

- The length of the PRS occasion group,  $L_{\text{GROUP}}^{\text{PRS}}$
- Number of PRS frequency hopping bands,  $N_{\text{BAND}}^{\text{PRS}}$
- $n_i^{\text{RB}}$  defined as twice the starting PRB index of PRS frequency hopping band  $i$  where
  - $n_i^{\text{RB}} = N_{\text{RB}}^{\text{DL}} - N_{\text{RB}}^{\text{PRS}}$  if  $i = 0$ ,
  - $n_i^{\text{RB}} = 2 \cdot \tilde{n}_i^{\text{RB}}$  where  $\tilde{n}_i^{\text{RB}}$  is the index of the first PRB in the PRS frequency hopping narrowband configured by higher layers if  $i \in \{1, \dots, N_{\text{BAND}}^{\text{PRS}} - 1\}$

If PRS frequency hopping is configured by higher layers, the reference signal sequence  $r_{l, n_s}(m)$  in the PRS occasion  $j$ ,  $j = 0, \dots, L_{\text{GROUP}}^{\text{PRS}} - 1$ , in the PRS occasion group shall be mapped to complex-valued modulation symbols  $a_{k,l}^{(p)}$  used as reference signal for antenna port  $p = 6$  in slot  $n_s$  according to

$$a_{k,l}^{(p)} = r_{l, n_s}(m')$$

where

- for normal cyclic prefix

$$\begin{aligned}
 i &= j \bmod N_{\text{BAND}}^{\text{PRS}} \\
 k &= 6 \left( m + n_1^{\text{RB}} \right) + (6 - l + v_{\text{shift}}) \bmod 6 \\
 l &= \begin{cases} 3, 5, 6 & \text{if } n_s \bmod 2 = 0 \\ 1, 2, 3, 5, 6 & \text{if } n_s \bmod 2 = 1 \text{ and (1 or 2 PBCH antenna ports)} \\ 2, 3, 5, 6 & \text{if } n_s \bmod 2 = 1 \text{ and (4 PBCH antenna ports)} \end{cases} \\
 m &= 0, 1, \dots, 2 \cdot N_{\text{RB}}^{\text{PRS}} - 1 \\
 m' &= m + n_1^{\text{RB}} + N_{\text{RB}}^{\text{max, DL}} - N_{\text{RB}}^{\text{DL}}
 \end{aligned}$$

- for extended cyclic prefix

$$\begin{aligned}
 i &= j \bmod N_{\text{BAND}}^{\text{PRS}} \\
 k &= 6 \left( m + n_1^{\text{RB}} \right) + (5 - l + v_{\text{shift}}) \bmod 6 \\
 l &= \begin{cases} 4, 5 & \text{if } n_s \bmod 2 = 0 \\ 1, 2, 4, 5 & \text{if } n_s \bmod 2 = 1 \text{ and (1 or 2 PBCH antenna ports)} \\ 2, 4, 5 & \text{if } n_s \bmod 2 = 1 \text{ and (4 PBCH antenna ports)} \end{cases} \\
 m &= 0, 1, \dots, 2 \cdot N_{\text{RB}}^{\text{PRS}} - 1 \\
 m' &= m + n_1^{\text{RB}} + N_{\text{RB}}^{\text{max, DL}} - N_{\text{RB}}^{\text{DL}}
 \end{aligned}$$


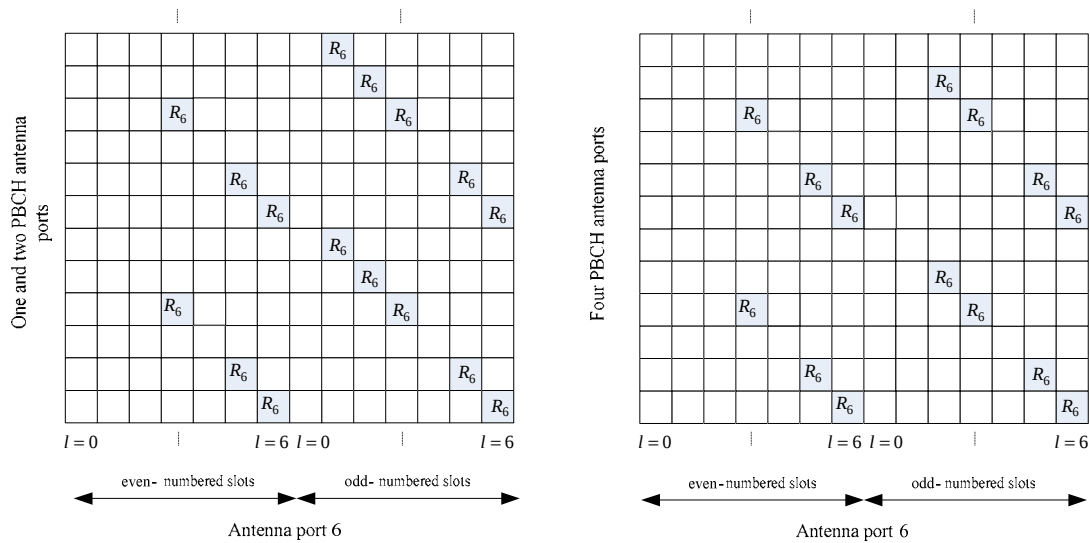


Figure 6.10.4.2-1: Mapping of positioning reference signals (normal cyclic prefix)

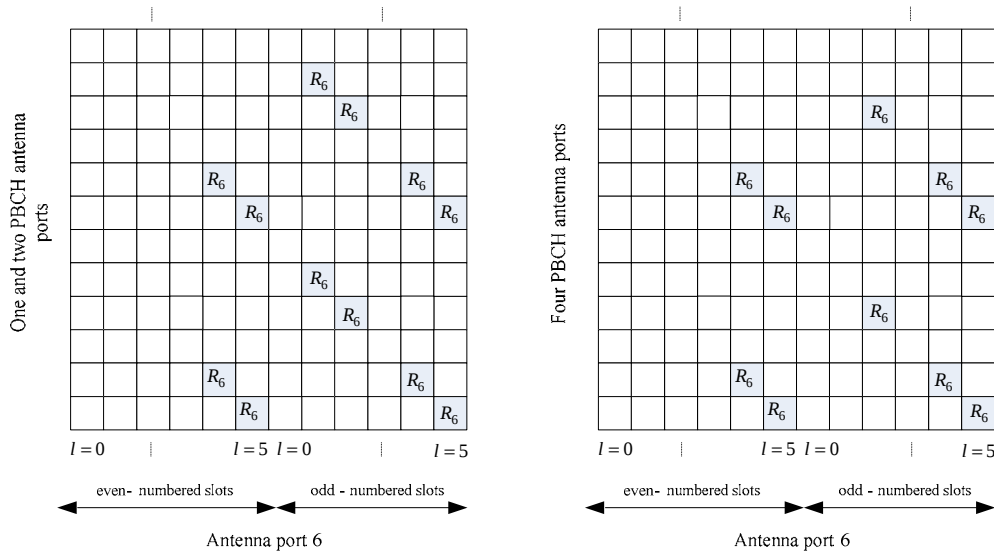

**Figure 6.10.4.2-2: Mapping of positioning reference signals (extended cyclic prefix)**

#### 6.10.4.3 Positioning reference signal subframe configuration

The subframe configuration period  $T_{\text{PRS}}$  and the subframe offset  $\Delta_{\text{PRS}}$  for the transmission of positioning reference signals are listed in Table 6.10.4.3-1. The PRS configuration index  $I_{\text{PRS}}$  is configured by higher layers. Positioning reference signals are transmitted only in configured DL subframes. Positioning reference signals shall not be transmitted in DwPTS. Positioning reference signals shall be transmitted in  $N_{\text{PRS}}$  consecutive downlink subframes, where  $N_{\text{PRS}}$  is configured by higher layers.

The positioning reference signal instances, for the first subframe of the  $N_{\text{PRS}}$  downlink subframes, shall satisfy  $(10 \times n_f + \lfloor n_s / 2 \rfloor - \Delta_{\text{PRS}}) \bmod T_{\text{PRS}} = 0$ .

**Table 6.10.4.3-1: Positioning reference signal subframe configuration**

| PRS configuration Index $I_{\text{PRS}}$ | PRS periodicity $T_{\text{PRS}}$<br>(subframes) | PRS subframe offset $\Delta_{\text{PRS}}$<br>(subframes) |
|------------------------------------------|-------------------------------------------------|----------------------------------------------------------|
| 0 – 159                                  | 160                                             | $I_{\text{PRS}}$                                         |
| 160 – 479                                | 320                                             | $I_{\text{PRS}} - 160$                                   |
| 480 – 1119                               | 640                                             | $I_{\text{PRS}} - 480$                                   |
| 1120 – 2399                              | 1280                                            | $I_{\text{PRS}} - 1120$                                  |
| 2400 – 2404                              | 5                                               | $I_{\text{PRS}} - 2400$                                  |
| 2405 – 2414                              | 10                                              | $I_{\text{PRS}} - 2405$                                  |
| 2415 – 2434                              | 20                                              | $I_{\text{PRS}} - 2415$                                  |
| 2435 – 2474                              | 40                                              | $I_{\text{PRS}} - 2435$                                  |
| 2475 – 2554                              | 80                                              | $I_{\text{PRS}} - 2475$                                  |
| 2555-4095                                | Reserved                                        |                                                          |

#### 6.10.5 CSI reference signals

CSI reference signals are transmitted on 1, 2, 4, 8, 12, 16, 20, 24, 28, or 32 antenna ports using  $p=15$ ,  $p=15,16$ ,  $p=15,\dots,18$ ,  $p=15,\dots,22$ ,  $p=15,\dots,26$ ,  $p=15,\dots,30$ ,  $p=15,\dots,34$ ,  $p=15,\dots,38$ ,  $p=15,\dots,42$  and  $p=15,\dots,46$ , respectively.

For CSI reference signals using more than eight antenna ports,  $N_{\text{res}}^{\text{CSI}} > 1$  CSI-RS configurations in the same subframe, numbered from 0 to  $N_{\text{res}}^{\text{CSI}} - 1$ , where value 0 corresponds to the configured *resourceConfig-r11* or *resourceConfig-r10*

and value  $k$  ( $k > 0$ ) corresponds to the configured  $k$ -th entry of *NZP-ResourceConfig-r13* from an aggregated list consisting of *nzp-resourceConfigList-r13* followed by *nzp-resourceConfigListExt-r14* (if configured), are aggregated to obtain  $N_{\text{res}}^{\text{CSI}} N_{\text{ports}}^{\text{CSI}}$  antenna ports in total. Each CSI-RS configuration in such an aggregation corresponds to

$N_{\text{ports}}^{\text{CSI}} \in \{4, 8\}$  antenna ports and one of the configurations in the range 0-19 in Table 6.10.5.2-1 for normal cyclic prefix, and one of the configurations in the range 0-15 in Table 6.10.5.2-2 for extended cyclic prefix. The supported configurations of aggregated CSI-RS configurations are shown in Table 6.10.5-1. If the higher layer parameter *NZP-TransmissionComb* is not configured,  $N_{\text{res}}^{\text{CSI}}$  unique CSI-RS configurations from Table 6.10.5.2-1 for normal cyclic prefix and from Table 6.10.5.2-2 for extended cyclic prefix are aggregated to form 12, 16, 20, 24, 28, or 32 antenna ports.

For CSI reference signals using more than sixteen antenna ports, when higher layer parameter *NZP-TransmissionComb* is configured, the number of unique CSI-RS configurations from Table 6.10.5.2-1 for normal cyclic prefix and from Table 6.10.5.2-2 for extended cyclic prefix that are aggregated to form 20, 24, 28, or 32 antenna ports can be less than or equal to  $N_{\text{res}}^{\text{CSI}}$ . The number of antenna ports within each such unique CSI-RS resource configuration is an integer multiple of  $N_{\text{ports}}^{\text{CSI}}$ .

CSI reference signals are defined for  $\Delta f = 15$  kHz only.

**Table 6.10.5-1: Aggregation of CSI-RS configurations.**

| Total number of antenna ports<br>$N_{\text{res}}^{\text{CSI}} N_{\text{ports}}^{\text{CSI}}$ | Number of antenna ports per CSI-RS configuration<br>$N_{\text{ports}}^{\text{CSI}}$ | Number of CSI-RS configurations<br>$N_{\text{res}}^{\text{CSI}}$ |
|----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------|
| 12                                                                                           | 4                                                                                   | 3                                                                |
| 16                                                                                           | 8                                                                                   | 2                                                                |
| 20                                                                                           | 4                                                                                   | 5                                                                |
| 24                                                                                           | 8                                                                                   | 3                                                                |
| 28                                                                                           | 4                                                                                   | 7                                                                |
| 32                                                                                           | 8                                                                                   | 4                                                                |

### 6.10.5.1 Sequence generation

The reference-signal sequence  $r_{l,n_s}(m)$  is defined by

$$r_{l,n_s}(m) = \frac{1}{\sqrt{2}}(1 - 2 \cdot c(2m)) + j \frac{1}{\sqrt{2}}(1 - 2 \cdot c(2m+1)), \quad m = 0, 1, \dots, N_{\text{RB}}^{\text{max,DL}} - 1$$

where  $n_s$  is the slot number within a radio frame and  $l$  is the OFDM symbol number within the slot. The pseudo-random sequence  $c(i)$  is defined in clause 7.2. The pseudo-random sequence generator shall be initialised with  $c_{\text{init}} = 2^{10} \cdot (7 \cdot (n'_s + 1) + l + 1) \cdot (2 \cdot N_{\text{ID}}^{\text{CSI}} + 1) + 2 \cdot N_{\text{ID}}^{\text{CSI}} + N_{\text{CP}}$  at the start of each OFDM symbol where

$$n'_s = \begin{cases} 10 \lfloor n_s / 10 \rfloor + n_s \bmod 2 & \text{for frame structure type 3 when the CSI-RS is part of a DRS} \\ n_s & \text{otherwise} \end{cases}$$

$$N_{\text{CP}} = \begin{cases} 1 & \text{for normal CP} \\ 0 & \text{for extended CP} \end{cases}$$

The quantity  $N_{\text{ID}}^{\text{CSI}}$  equals  $N_{\text{ID}}^{\text{cell}}$  unless configured by higher layers.

### 6.10.5.2 Mapping to resource elements

In subframes configured for CSI reference signal transmission, the reference signal sequence  $r_{l,n_s}(m)$  shall be mapped to complex-valued modulation symbols  $a_{k,l}^{(p)}$  used as reference symbols on antenna port  $p$ . The mapping depends on the higher-layer parameter *CDMType*.

For the case of *CDMType* is not configured or is configured to CDM2:

$$a_{k,l}^{(p')} = w_{l''} \cdot r_{l,n_s}(m')$$

where

$$k = k' + 12m + \begin{cases} -0 & \text{for } p' \in \{15,16\}, \text{ normal cyclic prefix} \\ -6 & \text{for } p' \in \{17,18\}, \text{ normal cyclic prefix} \\ -1 & \text{for } p' \in \{19,20\}, \text{ normal cyclic prefix} \\ -7 & \text{for } p' \in \{21,22\}, \text{ normal cyclic prefix} \\ -0 & \text{for } p' \in \{15,16\}, \text{ extended cyclic prefix} \\ -3 & \text{for } p' \in \{17,18\}, \text{ extended cyclic prefix} \\ -6 & \text{for } p' \in \{19,20\}, \text{ extended cyclic prefix} \\ -9 & \text{for } p' \in \{21,22\}, \text{ extended cyclic prefix} \end{cases}$$

$$l = l' + \begin{cases} l'' & \text{CSI referencesignal configurations 0 - 19, normal cyclic prefix} \\ 2l'' & \text{CSI referencesignal configurations 20 - 31, normal cyclic prefix} \\ l'' & \text{CSI referencesignal configurations 0 - 27, extended cyclic prefix} \end{cases}$$

$$w_{l''} = \begin{cases} 1 & p' \in \{15,17,19,21\} \\ (-1)^{l''} & p' \in \{16,18,20,22\} \end{cases}$$

$$l'' = 0,1$$

$$m' = m + \left\lfloor \frac{N_{\text{RB}}^{\text{max,DL}} - N_{\text{RB}}^{\text{DL}}}{2} \right\rfloor$$

For the case of *CDMType* equal to CDM4:

$$a_{k,l}^{(p')} = w_{p'}(i) \cdot r_{l,n_s}(m')$$

where

$$k = k' + 12m - \begin{cases} k'' & \text{for } p' \in \{15,16,19,20\}, \text{ normal cyclic prefix, } N_{\text{ports}}^{\text{CSI}} = 8 \\ k'' + 6 & \text{for } p' \in \{17,18,21,22\}, \text{ normal cyclic prefix, } N_{\text{ports}}^{\text{CSI}} = 8 \\ 6k'' & \text{for } p' \in \{15,16,17,18\}, \text{ normal cyclic prefix, } N_{\text{ports}}^{\text{CSI}} = 4 \end{cases}$$

$$l = l' + \begin{cases} l'' & \text{CSI referencesignal configurations 0 - 19, normal cyclic prefix} \\ 2l'' & \text{CSI referencesignal configurations 20 - 31, normal cyclic prefix} \end{cases}$$

$$l'' = 0,1$$

$$k'' = 0,1$$

$$i = 2k'' + l''$$

$$m' = m + \left\lfloor \frac{N_{\text{RB}}^{\text{max,DL}} - N_{\text{RB}}^{\text{DL}}}{2} \right\rfloor$$

and where  $w_{p'}(i)$  is given by Table 6.10.5.2-0.

**Table 6.10.5.2-0: The sequence  $w_{p'}(i)$  for CDM4.**

| $N_{\text{ports}}^{\text{CSI}} = 4$ | $N_{\text{ports}}^{\text{CSI}} = 8$ | $p'$        |             |             |             |
|-------------------------------------|-------------------------------------|-------------|-------------|-------------|-------------|
|                                     |                                     | $w_{p'}(0)$ | $w_{p'}(1)$ | $w_{p'}(2)$ | $w_{p'}(3)$ |

|    |       |                                                 |
|----|-------|-------------------------------------------------|
| 15 | 15,17 | $\begin{bmatrix} 1 & 1 & 1 & 1 \end{bmatrix}$   |
| 16 | 16,18 | $\begin{bmatrix} 1 & -1 & 1 & -1 \end{bmatrix}$ |
| 17 | 19,21 | $\begin{bmatrix} 1 & 1 & -1 & -1 \end{bmatrix}$ |
| 18 | 20,22 | $\begin{bmatrix} 1 & -1 & -1 & 1 \end{bmatrix}$ |

If neither of the higher-layer parameters *NZP-FrequencyDensity* and *NZP-TransmissionComb* are configured,  
 $m = 0, 1, \dots, N_{RB}^{DL} - 1$ .

If the UE is configured with one or more of the parameters *NZP-FrequencyDensity* and *NZP-TransmissionComb*,

- if either *NZP-FrequencyDensity* equals 1,  $m = 0, 1, \dots, N_{RB}^{DL} - 1$
- if *NZP-FrequencyDensity* equals 1/2 and *NZP-TransmissionComb* equals 0,  
 $m = 0, 2, \dots, N_{RB}^{DL} - 1 - ((N_{RB}^{DL} - 1) \bmod 2)$
- if *NZP-FrequencyDensity* equals 1/2 and *NZP-TransmissionComb* equals 1,  
 $m = 1, 3, \dots, N_{RB}^{DL} - 1 - ((N_{RB}^{DL} - 2) \bmod 2)$
- if *NZP-FrequencyDensity* equals 1/3 and *NZP-TransmissionComb* equals 0,  
 $m = 0, 3, \dots, N_{RB}^{DL} - 1 - ((N_{RB}^{DL} - 1) \bmod 3)$
- if *NZP-FrequencyDensity* equals 1/3 and *NZP-TransmissionComb* equals 1,  
 $m = 1, 4, \dots, N_{RB}^{DL} - 1 - ((N_{RB}^{DL} - 2) \bmod 3)$
- if *NZP-FrequencyDensity* equals 1/3 and *NZP-TransmissionComb* equals 2,  
 $m = 2, 5, \dots, N_{RB}^{DL} - 1 - ((N_{RB}^{DL} - 3) \bmod 3)$

The quantity  $(k', l')$  and the necessary conditions on  $n_s$  are given by Tables 6.10.5.2-1 and 6.10.5.2-2 for normal and extended cyclic prefix, respectively.

The relation between the antenna port number  $p$  and the quantity  $p'$  depends on the number of CSI-RS antenna ports:

- for CSI reference signals using up to eight antenna ports,  $p = p'$
- for CSI reference signals using more than eight antenna ports when the higher-layer parameter *CDMType* equals *CDM2*

$$p = \begin{cases} p' + \frac{N_{ports}^{CSI}}{2} i' & \text{for } p' \in \{15, \dots, 15 + N_{ports}^{CSI}/2 - 1\} \\ p' + \frac{N_{ports}^{CSI}}{2} (i' + N_{res}^{CSI} - 1) & \text{for } p' \in \{15 + N_{ports}^{CSI}/2, \dots, 15 + N_{ports}^{CSI} - 1\} \end{cases}$$

where  $i' \in \{0, 1, \dots, N_{res}^{CSI} - 1\}$  is the CSI-RS resource number.

- for CSI reference signals using more than eight antenna ports when the higher-layer parameter *CDMType* equals *CDM4*, antenna port number  $p = i' N_{ports}^{CSI} + p'$  where  $p' \in \{15, 16, \dots, 15 + N_{ports}^{CSI} - 1\}$  for CSI-RS resource number  $i' \in \{0, 1, \dots, N_{res}^{CSI} - 1\}$ .

For the case of *CDMType* equal to *CDM8* and the number of CSI-RS antenna ports equal to 32:

$$a_{k,l}^{(p)} = w_p(i) \cdot r_{l,n_s}(m')$$

where

$$\begin{aligned}
k &= k' + 12m + \begin{cases} -0 & \text{for } p' \in \{15, 16\}, \text{ normal cyclic prefix} \\ -6 & \text{for } p' \in \{17, 18\}, \text{ normal cyclic prefix} \\ -1 & \text{for } p' \in \{19, 20\}, \text{ normal cyclic prefix} \\ -7 & \text{for } p' \in \{21, 22\}, \text{ normal cyclic prefix} \\ -0 & \text{for } p' \in \{15, 16\}, \text{ extended cyclic prefix} \\ -3 & \text{for } p' \in \{17, 18\}, \text{ extended cyclic prefix} \\ -6 & \text{for } p' \in \{19, 20\}, \text{ extended cyclic prefix} \\ -9 & \text{for } p' \in \{21, 22\}, \text{ extended cyclic prefix} \end{cases} \\
l &= l' + \begin{cases} l'' & \text{CSI referencesignal configurations 0 - 19, normal cyclic prefix} \\ 2l'' & \text{CSI referencesignal configurations 20 - 31, normal cyclic prefix} \\ l'' & \text{CSI referencesignal configurations 0 - 27, extended cyclic prefix} \end{cases} \\
l'' &= 0, 1 \\
q &= \begin{cases} 0 & \text{if } k - k' - 12m = -0, \text{ normal cyclic prefix} \\ 1 & \text{if } k - k' - 12m = -6, \text{ normal cyclic prefix} \\ 2 & \text{if } k - k' - 12m = -1, \text{ normal cyclic prefix} \\ 3 & \text{if } k - k' - 12m = -7, \text{ normal cyclic prefix} \\ 0 & \text{if } k - k' - 12m = -0, \text{ extended cyclic prefix} \\ 1 & \text{if } k - k' - 12m = -3, \text{ extended cyclic prefix} \\ 2 & \text{if } k - k' - 12m = -6, \text{ extended cyclic prefix} \\ 3 & \text{if } k - k' - 12m = -9, \text{ extended cyclic prefix} \end{cases} \\
m' &= m + \left\lfloor \frac{N_{\text{RB}}^{\text{max,DL}} - N_{\text{RB}}^{\text{DL}}}{2} \right\rfloor \\
m &= 0, 1, \dots, N_{\text{RB}}^{\text{DL}} - 1
\end{aligned}$$

The resource elements for the  $\bar{q}^{\text{th}}$  CDM8 pattern, where  $\bar{q} = 0, 1, 2, 3$ , are determined by aggregating pairs of resource elements  $(k, l)$  satisfying  $q = \bar{q}$  from the  $N_{\text{res}}^{\text{CSI}}$  aggregated CSI-RS configurations, where at most one pair of resource elements is drawn from each of the  $N_{\text{res}}^{\text{CSI}}$  aggregated CSI-RS configurations. For the case of *CDMType* equal to *CDM8* and the number of CSI-RS antenna ports equal to 32, the aggregated CSI-RS configurations from Table 6.10.5.2-1 for normal cyclic prefix and from Table 6.10.5.2-2 for extended cyclic prefix are restricted to one of  $\{0, 1, 2, 3\}$ ,  $\{0, 2, 3, 4\}$ , or  $\{1, 2, 3, 4\}$ . Antenna port number  $p = i' N_{\text{ports}}^{\text{CSI}} + p'$  where  $p' \in \{15, 16, \dots, 15 + N_{\text{ports}}^{\text{CSI}} - 1\}$  for CSI-RS resource number  $i' \in \{0, 1, \dots, N_{\text{res}}^{\text{CSI}} - 1\}$ . The sequence  $w_p(i)$  is given by Table 6.10.5.2-0A, where  $i = 2i' + l''$ .

**Table 6.10.5.2-0A: The sequence  $w_p(i)$  for CDM8 with 32 CSI-RS antenna ports.**

| $p$            | $[w_p(0) \ w_p(1) \ w_p(2) \ w_p(3) \ w_p(4) \ w_p(5) \ w_p(6) \ w_p(7)]$ |
|----------------|---------------------------------------------------------------------------|
| 15, 17, 19, 21 | $[1 \ 1 \ 1 \ 1 \ 1 \ 1 \ 1 \ 1]$                                         |
| 16, 18, 20, 22 | $[1 \ -1 \ 1 \ -1 \ 1 \ -1 \ 1 \ -1]$                                     |
| 23, 25, 27, 29 | $[1 \ 1 \ -1 \ -1 \ 1 \ 1 \ -1 \ -1]$                                     |
| 24, 26, 28, 30 | $[1 \ -1 \ -1 \ 1 \ 1 \ -1 \ -1 \ 1]$                                     |
| 31, 33, 35, 37 | $[1 \ 1 \ 1 \ 1 \ -1 \ -1 \ -1 \ -1]$                                     |
| 32, 34, 36, 38 | $[1 \ -1 \ 1 \ -1 \ -1 \ 1 \ -1 \ 1]$                                     |
| 39, 41, 43, 45 | $[1 \ 1 \ -1 \ -1 \ -1 \ -1 \ 1 \ 1]$                                     |

|                |                                       |
|----------------|---------------------------------------|
| 40, 42, 44, 46 | $[1 \ -1 \ -1 \ 1 \ -1 \ 1 \ 1 \ -1]$ |
|----------------|---------------------------------------|

For the case of *CDMType* equal to *CDM8* and the number of CSI-RS antenna ports equal to 24:

$$a_{k,l}^{(p)} = w_p(i) \cdot r_{l,n_s}(m')$$

where

$$\begin{aligned}
 k &= k' + 12m - \begin{cases} k'' & \text{for } p' \in \{15, 16, 19, 20\}, \text{ normal cyclic prefix, } N_{\text{ports}}^{\text{CSI}} = 8 \\ k'' + 6 & \text{for } p' \in \{17, 18, 21, 22\}, \text{ normal cyclic prefix, } N_{\text{ports}}^{\text{CSI}} = 8 \end{cases} \\
 l &= l' + \begin{cases} l'' & \text{CSI reference signal configurations 0-19, normal cyclic prefix} \\ 2l'' & \text{CSI reference signal configurations 20-31, normal cyclic prefix} \end{cases} \\
 l'' &= 0, 1 \\
 k'' &= 0, 1 \\
 q &= \begin{cases} 0 & \text{if } k - k' - 12m + k'' = 0, \text{ normal cyclic prefix,} \\ 1 & \text{if } k - k' - 12m + k'' = -6, \text{ normal cyclic prefix} \end{cases} \\
 m' &= m + \left\lfloor \frac{N_{\text{RB}}^{\text{max,DL}} - N_{\text{RB}}^{\text{DL}}}{2} \right\rfloor \\
 m &= 0, 1, \dots, N_{\text{RB}}^{\text{DL}} - 1
 \end{aligned}$$

For the case of *CDMType* equal to *CDM8* and the number of CSI-RS antenna ports equal to 24, the aggregated CSI-RS configurations from Table 6.10.5.2-1 for normal cyclic prefix are restricted to  $\{1, 2, 3\}$  in that order. Resource elements for CDM8 patterns are determined as follows:

- Aggregating resource element quadruplet  $(k, l)$  satisfying  $q=0$  from CSI-RS configuration 1 with resource element quadruplet  $(k, l)$  satisfying  $q=0$  from CSI-RS configuration 2
- Aggregating resource element quadruplet  $(k, l)$  satisfying  $q=0$  from CSI-RS configuration 3 with resource element quadruplet  $(k, l)$  satisfying  $q=1$  from CSI-RS configuration 1
- Aggregating resource element quadruplet  $(k, l)$  satisfying  $q=1$  from CSI-RS configuration 2 with resource element quadruplet  $(k, l)$  satisfying  $q=1$  from CSI-RS configuration 3

Antenna port number  $p = i' N_{\text{ports}}^{\text{CSI}} + p'$  where  $p' \in \{15, 16, \dots, 15 + N_{\text{ports}}^{\text{CSI}} - 1\}$  for CSI-RS resource number

$i' \in \{0, 1, \dots, N_{\text{res}}^{\text{CSI}} - 1\}$ . The sequence  $w_p(i)$  is given by Table 6.10.5.2-0B. The sequence index  $i$  is determined as follows:

- For resource element quadruplet  $(k, l)$  satisfying  $q=0$  from CSI-RS configuration 1, resource element quadruplet  $(k, l)$  satisfying  $q=1$  from CSI-RS configuration 2, or resource element quadruplet  $(k, l)$  satisfying  $q=0$  from CSI-RS configuration 3,  $i = 2k'' + l''$ .
- For resource element quadruplet  $(k, l)$  satisfying  $q=1$  from CSI-RS configuration 1, resource element quadruplet  $(k, l)$  satisfying  $q=0$  from CSI-RS configuration 2, or resource element quadruplet  $(k, l)$  satisfying  $q=1$  from CSI-RS configuration 3,  $i = 2k'' + l'' + 4$ .

**Table 6.10.5.2-0B: The sequence  $w_p(i)$  for CDM8 with 24 CSI-RS antenna ports.**

|     |                                                                           |
|-----|---------------------------------------------------------------------------|
| $p$ | $[w_p(0) \ w_p(1) \ w_p(2) \ w_p(3) \ w_p(4) \ w_p(5) \ w_p(6) \ w_p(7)]$ |
|-----|---------------------------------------------------------------------------|

|            |                                       |
|------------|---------------------------------------|
| 15, 25, 31 | $[1 \ 1 \ 1 \ 1 \ 1 \ 1 \ 1 \ 1]$     |
| 16, 26, 32 | $[1 \ -1 \ 1 \ -1 \ 1 \ -1 \ 1 \ -1]$ |
| 19, 29, 35 | $[1 \ 1 \ -1 \ -1 \ 1 \ 1 \ -1 \ -1]$ |
| 20, 30, 36 | $[1 \ -1 \ -1 \ 1 \ 1 \ -1 \ -1 \ 1]$ |
| 17, 23, 33 | $[1 \ 1 \ 1 \ 1 \ -1 \ -1 \ -1 \ -1]$ |
| 18, 24, 34 | $[1 \ -1 \ 1 \ -1 \ -1 \ 1 \ -1 \ 1]$ |
| 21, 27, 37 | $[1 \ 1 \ -1 \ -1 \ -1 \ -1 \ 1 \ 1]$ |
| 22, 28, 38 | $[1 \ -1 \ -1 \ 1 \ -1 \ 1 \ 1 \ -1]$ |

Multiple CSI reference signal configurations can be used in a given cell. A UE can be configured with multiple sets of CSI reference signals,

- one or more configurations for CSI reporting for which the UE shall assume non-zero transmission power for the CSI-RS, and
- zero or more configurations for which the UE shall assume zero transmission power, and
- zero or more configurations valid across the system downlink bandwidth as part of the discovery signals for which the UE shall assume non-zero transmission power for the CSI-RS.

The CSI-RS configurations for which the UE shall assume non-zero transmission power are provided by higher layers.

The CSI-RS configurations for which the UE shall assume zero transmission power in a subframe are given by a bitmap derived according to clause 7.2.7 in TS 36.213 [4]. For each bit set to one in the 16-bit bitmap, the UE shall assume zero transmission power for the resource elements corresponding to the four CSI reference signal column in Tables 6.10.5.2-1 and 6.10.5.2-2 for normal and extended cyclic prefix, respectively, except for resource elements that overlap with those for which the UE shall assume non-zero transmission power CSI-RS as configured by higher layers. The most significant bit corresponds to the lowest CSI reference signal configuration index and subsequent bits in the bitmap correspond to configurations with indices in increasing order.

CSI reference signals not corresponding to higher layer configured parameters *csi-RS-ConfigNZP-ApList* or *csi-RS-ConfigZP-ApList* can only occur in

- downlink slots where  $n_s \bmod 2$  fulfils the condition in Tables 6.10.5.2-1 and 6.10.5.2-2 for normal and extended cyclic prefix, respectively, and
- where the subframe number fulfils the conditions in clause 6.10.5.3.

CSI reference signals corresponding to either higher layer configured parameter *csi-RS-ConfigNZP-ApList* or *csi-RS-ConfigZP-ApList* can only occur in

- downlink slots where  $n_s \bmod 2$  fulfils the condition in Tables 6.10.5.2-1 and 6.10.5.2-2 for normal and extended cyclic prefix, respectively.

The UE shall assume that CSI reference signals are not transmitted

- in the DwPTS for special subframe configuration 0, 5, 9 and 10 for normal cyclic prefix and special subframe configuration 0, 4 and 7 for extended cyclic prefix, in case of frame structure type 2,
- in the DwPTS for normal CP for the case of *CDMType* equal to *CDM8* and the number of CSI-RS antenna ports equal to 24,
- in subframes where PDSCH/EPDCCH transmission starts in the second slot of a subframe for frame structure type 3,
- in subframes where PDSCH/EPDCCH transmission ends prior to the end of a subframe for frame structure type

3,

- in an empty subframe where there is no PDSCH or discovery signal transmission for frame structure type 3,
- in subframes where transmission of a CSI-RS would collide with *SystemInformationBlockType1* messages,
- in the primary cell in subframes configured for transmission of paging messages in the primary cell for any UE with the cell-specific paging configuration.

For special subframe configuration {1, 2, 6, or 7}, a UE does not expect to be configured with one of CSI-RS configurations {1, 2, 3, 4, 6, 7, 8, 9, 12, 13, 14, 15, 16, 17} in DwPTS for normal CP.

The UE shall assume that none of the CSI reference signals corresponding to a CSI reference signal configuration are transmitted in subframes where transmission of any of those CSI reference signals would collide with transmission of synchronization signals or the core part of PBCH.

Resource elements  $(k, l)$  used for transmission of CSI reference signals on any of the antenna ports in the set  $S$ , where  $S = \{15\}$ ,  $S = \{15,16\}$ ,  $S = \{17,18\}$ ,  $S = \{19,20\}$ ,  $S = \{21,22\}$ ,  $S = \{23,24\}$ ,  $S = \{25,26\}$ ,  $S = \{27,28\}$ ,  $S = \{29,30\}$ ,  $S = \{31,32\}$ ,  $S = \{33,34\}$ ,  $S = \{35,36\}$ ,  $S = \{37,38\}$ ,  $S = \{39,40\}$ ,  $S = \{41,42\}$ ,  $S = \{43,44\}$  or  $S = \{45,46\}$  shall not be used for transmission of PDSCH on any antenna port in the same slot if higher layer parameter *CDMType* is not configured, or is configured to *CDM2*.

Resource elements  $(k, l)$  used for transmission of CSI reference signals on any of the antenna ports in the set  $S$ , where

- $S = \{15,16,17,18\}$ ,  $S = \{19,20,21,22\}$  or  $S = \{23,24,25,26\}$  for CSI reference signals on 12 ports, or
- $S = \{15,16,19,20\}$ ,  $S = \{17,18,21,22\}$ ,  $S = \{23,24,27,28\}$  or  $S = \{25,26,29,30\}$  for CSI reference signals on 16 ports, or
- $S = \{15,16,17,18\}$ ,  $S = \{19,20,21,22\}$ ,  $S = \{23,24,25,26\}$ ,  $S = \{27,28,29,30\}$  or  $S = \{31,32,33,34\}$  for CSI reference signals on 20 ports, or
- $S = \{15,16,19,20\}$ ,  $S = \{17,18,21,22\}$ ,  $S = \{23,24,27,28\}$ ,  $S = \{25,26,29,30\}$ ,  $S = \{31,32,35,36\}$  or  $S = \{33,34,37,38\}$  for CSI reference signals on 24 ports, or
- $S = \{15,16,17,18\}$ ,  $S = \{19,20,21,22\}$ ,  $S = \{23,24,25,26\}$ ,  $S = \{27,28,29,30\}$ ,  $S = \{31,32,33,34\}$ ,  $S = \{35,36,37,38\}$  or  $S = \{39,40,41,42\}$  for CSI reference signals on 28 ports, or
- $S = \{15,16,19,20\}$ ,  $S = \{17,18,21,22\}$ ,  $S = \{23,24,27,28\}$ ,  $S = \{25,26,29,30\}$ ,  $S = \{31,32,35,36\}$ ,  $S = \{33,34,37,38\}$ ,  $S = \{39,40,43,44\}$  or  $S = \{41,42,45,46\}$  for CSI reference signals on 32 ports

shall not be used for transmission of PDSCH on any antenna port in the same slot if higher layer parameter *CDMType* is configured to *CDM4*.

Resource elements  $(k, l)$  used for transmission of CSI reference signals on any of the antenna ports in the set  $S$ , where

- $S = \{15,16,19,20,23,24,27,28\}$ ,  $S = \{17,18,21,22,31,32,35,36\}$  or  $S = \{25,26,29,30,33,34,37,38\}$  for CSI reference signals on 24 ports, or
- $S = \{15,16,23,24,31,32,39,40\}$ ,  $S = \{17,18,25,26,33,34,41,42\}$ ,  $S = \{19,20,27,28,35,36,43,44\}$  or  $S = \{21,22,29,30,37,38,45,46\}$  for CSI reference signals on 32 ports

shall not be used for transmission of PDSCH on any antenna port in the same slot if higher layer parameter *CDMType* is configured to *CDM8*.

The mapping for CSI reference signal configuration 0 is illustrated in Figures 6.10.5.2-1 and 6.10.5.2-2.

Table 6.10.5.2-1: Mapping from CSI reference signal configuration to  $(k', l')$  for normal cyclic prefix

| CSI-RS config. | Number of CSI reference signals configured |        |                                |        |                               |        |                                |        |                               |        |                                |        |
|----------------|--------------------------------------------|--------|--------------------------------|--------|-------------------------------|--------|--------------------------------|--------|-------------------------------|--------|--------------------------------|--------|
|                | 1 or 2                                     |        |                                |        | 4                             |        |                                |        | 8                             |        |                                |        |
|                | Normal subframe<br>$(k', l')$              | $n'_s$ | Special subframe<br>$(k', l')$ | $n'_s$ | Normal subframe<br>$(k', l')$ | $n'_s$ | Special subframe<br>$(k', l')$ | $n'_s$ | Normal subframe<br>$(k', l')$ | $n'_s$ | Special subframe<br>$(k', l')$ | $n'_s$ |
| 0              | (9,5)                                      | 0      | (9,5)                          | 0      | (9,5)                         | 0      | (9,5)                          | 0      | (9,5)                         | 0      | (9,5)                          | 0      |
| 1              | (11,2)                                     | 1      | (11,5)                         | 0      | (11,2)                        | 1      | (11,5)                         | 0      | (11,2)                        | 1      | (11,5)                         | 0      |
| 2              | (9,2)                                      | 1      | (9,2)                          | 1      | (9,2)                         | 1      | (9,2)                          | 1      | (9,2)                         | 1      | (9,2)                          | 1      |
| 3              | (7,2)                                      | 1      | (7,5)                          | 0      | (7,2)                         | 1      | (7,5)                          | 0      | (7,2)                         | 1      | (7,5)                          | 0      |
| 4              | (9,5)                                      | 1      |                                |        | (9,5)                         | 1      |                                |        | (9,5)                         | 1      |                                |        |
| 5              | (8,5)                                      | 0      | (8,5)                          | 0      | (8,5)                         | 0      | (8,5)                          | 0      |                               |        |                                |        |
| 6              | (10,2)                                     | 1      | (10,5)                         | 0      | (10,2)                        | 1      | (10,5)                         | 0      |                               |        |                                |        |
| 7              | (8,2)                                      | 1      | (8,2)                          | 1      | (8,2)                         | 1      | (8,2)                          | 1      |                               |        |                                |        |
| 8              | (6,2)                                      | 1      | (6,5)                          | 0      | (6,2)                         | 1      | (6,5)                          | 0      |                               |        |                                |        |
| 9              | (8,5)                                      | 1      |                                |        | (8,5)                         | 1      |                                |        |                               |        |                                |        |
| 10             | (3,5)                                      | 0      | (3,5)                          | 0      |                               |        |                                |        |                               |        |                                |        |
| 11             | (2,5)                                      | 0      | (2,5)                          | 0      |                               |        |                                |        |                               |        |                                |        |
| 12             | (5,2)                                      | 1      | (5,5)                          | 0      |                               |        |                                |        |                               |        |                                |        |
| 13             | (4,2)                                      | 1      | (4,5)                          | 0      |                               |        |                                |        |                               |        |                                |        |
| 14             | (3,2)                                      | 1      | (3,2)                          | 1      |                               |        |                                |        |                               |        |                                |        |
| 15             | (2,2)                                      | 1      | (2,2)                          | 1      |                               |        |                                |        |                               |        |                                |        |
| 16             | (1,2)                                      | 1      | (1,5)                          | 0      |                               |        |                                |        |                               |        |                                |        |
| 17             | (0,2)                                      | 1      | (0,5)                          | 0      |                               |        |                                |        |                               |        |                                |        |
| 18             | (3,5)                                      | 1      |                                |        |                               |        |                                |        |                               |        |                                |        |
| 19             | (2,5)                                      | 1      |                                |        |                               |        |                                |        |                               |        |                                |        |
| 20             | (11,1)                                     | 1      |                                |        | (11,1)                        | 1      |                                |        | (11,1)                        | 1      |                                |        |
| 21             | (9,1)                                      | 1      |                                |        | (9,1)                         | 1      |                                |        | (9,1)                         | 1      |                                |        |
| 22             | (7,1)                                      | 1      |                                |        | (7,1)                         | 1      |                                |        | (7,1)                         | 1      |                                |        |
| 23             | (10,1)                                     | 1      |                                |        | (10,1)                        | 1      |                                |        |                               |        |                                |        |
| 24             | (8,1)                                      | 1      |                                |        | (8,1)                         | 1      |                                |        |                               |        |                                |        |
| 25             | (6,1)                                      | 1      |                                |        | (6,1)                         | 1      |                                |        |                               |        |                                |        |
| 26             | (5,1)                                      | 1      |                                |        |                               |        |                                |        |                               |        |                                |        |
| 27             | (4,1)                                      | 1      |                                |        |                               |        |                                |        |                               |        |                                |        |
| 28             | (3,1)                                      | 1      |                                |        |                               |        |                                |        |                               |        |                                |        |
| 29             | (2,1)                                      | 1      |                                |        |                               |        |                                |        |                               |        |                                |        |
| 30             | (1,1)                                      | 1      |                                |        |                               |        |                                |        |                               |        |                                |        |
| 31             | (0,1)                                      | 1      |                                |        |                               |        |                                |        |                               |        |                                |        |

Note:  $n'_s = n_s \bmod 2$ . Configurations 0 – 19 for normal subframes are available for frame structure types 1, 2 and 3. Configurations 20 – 31 and configurations for special subframes are available for frame structure type 2 only.

Table 6.10.5.2-2: Mapping from CSI reference signal configuration to  $(k', l')$  for extended cyclic prefix.

| CSI-RS<br>config. | Number of CSI reference signals configured |        |                     |        |                    |        |                     |        |                    |        |                     |        |
|-------------------|--------------------------------------------|--------|---------------------|--------|--------------------|--------|---------------------|--------|--------------------|--------|---------------------|--------|
|                   | 1 or 2                                     |        |                     |        | 4                  |        |                     |        | 8                  |        |                     |        |
|                   | Normal<br>subframe                         |        | Special<br>subframe |        | Normal<br>subframe |        | Special<br>subframe |        | Normal<br>Subframe |        | Special<br>subframe |        |
|                   | $(k', l')$                                 | $n'_s$ | $(k', l')$          | $n'_s$ | $(k', l')$         | $n'_s$ | $(k', l')$          | $n'_s$ | $(k', l')$         | $n'_s$ | $(k', l')$          | $n'_s$ |
| 0                 | (11,4)                                     | 0      | (11,4)              | 0      | (11,4)             | 0      | (11,4)              | 0      | (11,4)             | 0      | (11,4)              | 0      |
| 1                 | (9,4)                                      | 0      | (9,4)               | 0      | (9,4)              | 0      | (9,4)               | 0      | (9,4)              | 0      | (9,4)               | 0      |
| 2                 | (10,4)                                     | 1      |                     |        | (10,4)             | 1      |                     |        | (10,4)             | 1      |                     |        |
| 3                 | (9,4)                                      | 1      |                     |        | (9,4)              | 1      |                     |        | (9,4)              | 1      |                     |        |
| 4                 | (5,4)                                      | 0      | (5,4)               | 0      | (5,4)              | 0      | (5,4)               | 0      |                    |        |                     |        |
| 5                 | (3,4)                                      | 0      | (3,4)               | 0      | (3,4)              | 0      | (3,4)               | 0      |                    |        |                     |        |
| 6                 | (4,4)                                      | 1      |                     |        | (4,4)              | 1      |                     |        |                    |        |                     |        |
| 7                 | (3,4)                                      | 1      |                     |        | (3,4)              | 1      |                     |        |                    |        |                     |        |
| 8                 | (8,4)                                      | 0      | (8,4)               | 0      |                    |        |                     |        |                    |        |                     |        |
| 9                 | (6,4)                                      | 0      | (6,4)               | 0      |                    |        |                     |        |                    |        |                     |        |
| 10                | (2,4)                                      | 0      | (2,4)               | 0      |                    |        |                     |        |                    |        |                     |        |
| 11                | (0,4)                                      | 0      | (0,4)               | 0      |                    |        |                     |        |                    |        |                     |        |
| 12                | (7,4)                                      | 1      |                     |        |                    |        |                     |        |                    |        |                     |        |
| 13                | (6,4)                                      | 1      |                     |        |                    |        |                     |        |                    |        |                     |        |
| 14                | (1,4)                                      | 1      |                     |        |                    |        |                     |        |                    |        |                     |        |
| 15                | (0,4)                                      | 1      |                     |        |                    |        |                     |        |                    |        |                     |        |
| 16                | (11,1)                                     | 1      | (11,1)              | 1      | (11,1)             | 1      | (11,1)              | 1      | (11,1)             | 1      | (11,1)              | 1      |
| 17                | (10,1)                                     | 1      | (10,1)              | 1      | (10,1)             | 1      | (10,1)              | 1      | (10,1)             | 1      | (10,1)              | 1      |
| 18                | (9,1)                                      | 1      | (9,1)               | 1      | (9,1)              | 1      | (9,1)               | 1      | (9,1)              | 1      | (9,1)               | 1      |
| 19                | (5,1)                                      | 1      | (5,1)               | 1      | (5,1)              | 1      | (5,1)               | 1      |                    |        |                     |        |
| 20                | (4,1)                                      | 1      | (4,1)               | 1      | (4,1)              | 1      | (4,1)               | 1      |                    |        |                     |        |
| 21                | (3,1)                                      | 1      | (3,1)               | 1      | (3,1)              | 1      | (3,1)               | 1      |                    |        |                     |        |
| 22                | (8,1)                                      | 1      | (8,1)               | 1      |                    |        |                     |        |                    |        |                     |        |
| 23                | (7,1)                                      | 1      | (7,1)               | 1      |                    |        |                     |        |                    |        |                     |        |
| 24                | (6,1)                                      | 1      | (6,1)               | 1      |                    |        |                     |        |                    |        |                     |        |
| 25                | (2,1)                                      | 1      | (2,1)               | 1      |                    |        |                     |        |                    |        |                     |        |
| 26                | (1,1)                                      | 1      | (1,1)               | 1      |                    |        |                     |        |                    |        |                     |        |
| 27                | (0,1)                                      | 1      | (0,1)               | 1      |                    |        |                     |        |                    |        |                     |        |

Note:  $n'_s = n_s \bmod 2$ . Configurations 0 – 15 for normal subframes are available for both frame structure type 1 and type 2. Configurations 16 – 27 and configurations for special subframes are available for frame structure type 2 only.

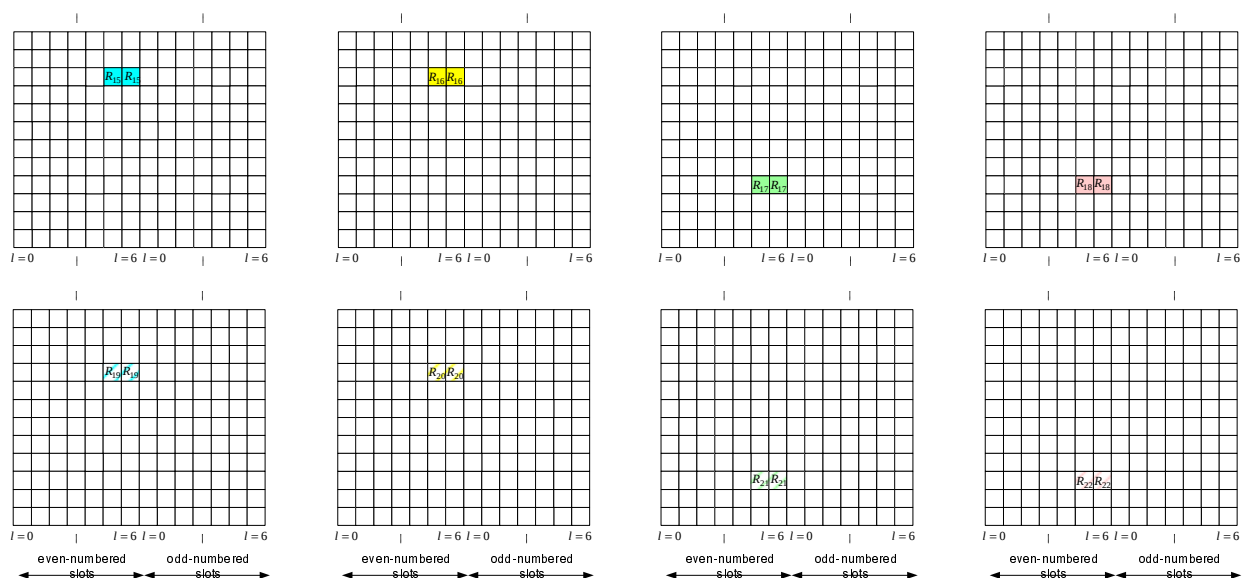


Figure 6.10.5.2-1: Mapping of CSI reference signals (CSI configuration 0, normal cyclic prefix)

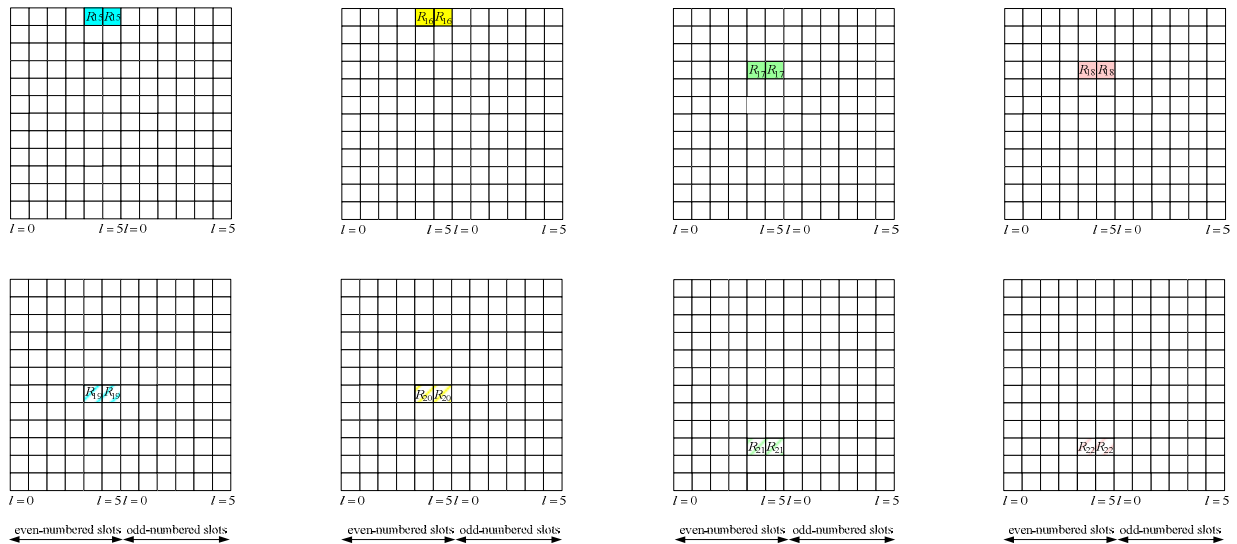


Figure 6.10.5.2-2: Mapping of CSI reference signals (CSI configuration 0, extended cyclic prefix)

### 6.10.5.3 CSI reference signal subframe configuration

The subframe configuration period  $T_{\text{CSI-RS}}$  and the subframe offset  $\Delta_{\text{CSI-RS}}$  for the occurrence of CSI reference signals are listed in Table 6.10.5.3-1. The parameter  $I_{\text{CSI-RS}}$  can be configured separately for CSI reference signals for which the UE shall assume non-zero and zero transmission power. Subframes containing CSI reference signals that do not correspond to either higher layer configured parameter *csi-RS-ConfigNZP-ApList* or *csi-RS-ConfigZP-ApList* shall satisfy  $(10n_f + \lfloor n_s/2 \rfloor - \Delta_{\text{CSI-RS}}) \bmod T_{\text{CSI-RS}} = 0$ .

Table 6.10.5.3-1: CSI reference signal subframe configuration

| CSI-RS-SubframeConfig $I_{\text{CSI-RS}}$ | CSI-RS periodicity $T_{\text{CSI-RS}}$<br>(subframes) | CSI-RS subframe offset $\Delta_{\text{CSI-RS}}$<br>(subframes) |
|-------------------------------------------|-------------------------------------------------------|----------------------------------------------------------------|
| 0 – 4                                     | 5                                                     | $I_{\text{CSI-RS}}$                                            |
| 5 – 14                                    | 10                                                    | $I_{\text{CSI-RS}} - 5$                                        |
| 15 – 34                                   | 20                                                    | $I_{\text{CSI-RS}} - 15$                                       |
| 35 – 74                                   | 40                                                    | $I_{\text{CSI-RS}} - 35$                                       |
| 75 – 154                                  | 80                                                    | $I_{\text{CSI-RS}} - 75$                                       |

## 6.11 Synchronization signals

There are 504 unique physical-layer cell identities. The physical-layer cell identities are grouped into 168 unique physical-layer cell-identity groups, each group containing three unique identities. The grouping is such that each physical-layer cell identity is part of one and only one physical-layer cell-identity group. A physical-layer cell identity  $N_{\text{ID}}^{\text{cell}} = 3N_{\text{ID}}^{(1)} + N_{\text{ID}}^{(2)}$  is thus uniquely defined by a number  $N_{\text{ID}}^{(1)}$  in the range of 0 to 167, representing the physical-layer cell-identity group, and a number  $N_{\text{ID}}^{(2)}$  in the range of 0 to 2, representing the physical-layer identity within the physical-layer cell-identity group.

### 6.11.1 Primary synchronization signal (PSS)

#### 6.11.1.1 Sequence generation

The sequence  $d(n)$  used for the primary synchronization signal is generated from a frequency-domain Zadoff-Chu sequence according to

$$d_u(n) = \begin{cases} e^{-j\frac{\pi u n(n+1)}{63}} & n = 0, 1, \dots, 30 \\ e^{-j\frac{\pi u (n+1)(n+2)}{63}} & n = 31, 32, \dots, 61 \end{cases}$$

where the Zadoff-Chu root sequence index  $u$  is given by Table 6.11.1.1-1.

**Table 6.11.1.1-1: Root indices for the primary synchronization signal**

| $N_{ID}^{(2)}$ | Root index $u$ |
|----------------|----------------|
| 0              | 25             |
| 1              | 29             |
| 2              | 34             |

### 6.11.1.2 Mapping to resource elements

The mapping of the sequence to resource elements depends on the frame structure. The UE shall not assume that the primary synchronization signal is transmitted on the same antenna port as any of the downlink reference signals. The UE shall not assume that any transmission instance of the primary synchronization signal is transmitted on the same antenna port, or ports, used for any other transmission instance of the primary synchronization signal.

The sequence  $d(n)$  shall be mapped to the resource elements according to

$$a_{k,l} = d(n), \quad n = 0, \dots, 61$$

$$k = n - 31 + \frac{N_{RB}^{DL} N_{sc}^{RB}}{2}$$

For frame structure type 1, the primary synchronization signal shall be mapped to the last OFDM symbol in slots 0 and 10.

For frame structure type 2, the primary synchronization signal shall be mapped to the third OFDM symbol in subframes 1 and 6. Resource elements  $(k, l)$  in the OFDM symbols used for transmission of the primary synchronization signal where

$$k = n - 31 + \frac{N_{RB}^{DL} N_{sc}^{RB}}{2}$$

$$n = -5, -4, \dots, -1, 62, 63, \dots, 66$$

are reserved and not used for transmission of the primary synchronization signal.

For frame structure type 3, the primary synchronization signal shall be mapped according to frame structure type 1 with the following exceptions:

- the primary synchronization signal shall be transmitted only if the corresponding subframe is non-empty and at least 12 OFDM symbols are transmitted,
- a primary synchronization signal being part of a discovery signal shall be transmitted in the last OFDM symbol of the first slot of a discovery signal occasion.

For an MBMS-dedicated cell, the primary synchronization signal shall be mapped according to frame structure type 1 with following exception:

- the primary synchronization signal shall be transmitted in slot 0 in subframes fulfilling  $n_f \bmod 4 = 0$  only.

For an MBMS-dedicated cell configured with CAS muting, the primary synchronization signal shall only be transmitted in the first  $4K_{CAS}$  frames, starting in frames fulfilling  $n_f \bmod 16N_{CAS} = 0$  where  $N_{CAS} \in \{2, 4, 8, 16\}$  and  $K_{CAS} \in \{4, 5, 6, \dots, 63\}$  are given by the higher-layer parameter *cas-MutingConfig*.

### 6.11.2 Secondary synchronization signal (SSS)

### 6.11.2.1 Sequence generation

The sequence  $d(0), \dots, d(61)$  used for the second synchronization signal is an interleaved concatenation of two length-31 binary sequences. The concatenated sequence is scrambled with a scrambling sequence given by the primary synchronization signal.

The combination of two length-31 sequences defining the secondary synchronization signal differs between subframes according to

$$d(2n) = \begin{cases} s_0^{(m_0)}(n)c_0(n) & \text{in subframes 0, 1, 2, 3, 4} \\ s_1^{(m_1)}(n)c_0(n) & \text{in subframes 5, 6, 7, 8, 9} \end{cases}$$

$$d(2n+1) = \begin{cases} s_1^{(m_1)}(n)c_1(n)z_1^{(m_0)}(n) & \text{in subframes 0, 1, 2, 3, 4} \\ s_0^{(m_0)}(n)c_1(n)z_1^{(m_1)}(n) & \text{in subframes 5, 6, 7, 8, 9} \end{cases}$$

where  $0 \leq n \leq 30$ . The indices  $m_0$  and  $m_1$  are derived from the physical-layer cell-identity group  $N_{\text{ID}}^{(1)}$  according to

$$m_0 = m' \bmod 31$$

$$m_1 = (m_0 + \lfloor m'/31 \rfloor + 1) \bmod 31$$

$$m' = N_{\text{ID}}^{(1)} + q(q+1)/2, \quad q = \left\lfloor \frac{N_{\text{ID}}^{(1)} + q'(q'+1)/2}{30} \right\rfloor, \quad q' = \lfloor N_{\text{ID}}^{(1)}/30 \rfloor$$

where the output of the above expression is listed in Table 6.11.2.1-1.

The two sequences  $s_0^{(m_0)}(n)$  and  $s_1^{(m_1)}(n)$  are defined as two different cyclic shifts of the m-sequence  $\tilde{s}(n)$  according to

$$s_0^{(m_0)}(n) = \tilde{s}((n + m_0) \bmod 31)$$

$$s_1^{(m_1)}(n) = \tilde{s}((n + m_1) \bmod 31)$$

where  $\tilde{s}(i) = 1 - 2x(i)$ ,  $0 \leq i \leq 30$ , is defined by

$$x(\bar{i} + 5) = (x(\bar{i} + 2) + x(\bar{i})) \bmod 2, \quad 0 \leq \bar{i} \leq 25$$

with initial conditions  $x(0) = 0$ ,  $x(1) = 0$ ,  $x(2) = 0$ ,  $x(3) = 0$ ,  $x(4) = 1$ .

The two scrambling sequences  $c_0(n)$  and  $c_1(n)$  depend on the primary synchronization signal and are defined by two different cyclic shifts of the m-sequence  $\tilde{c}(n)$  according to

$$c_0(n) = \tilde{c}((n + N_{\text{ID}}^{(2)}) \bmod 31)$$

$$c_1(n) = \tilde{c}((n + N_{\text{ID}}^{(2)} + 3) \bmod 31)$$

where  $N_{\text{ID}}^{(2)} \in \{0, 1, 2\}$  is the physical-layer identity within the physical-layer cell identity group  $N_{\text{ID}}^{(1)}$  and  $\tilde{c}(i) = 1 - 2x(i)$ ,  $0 \leq i \leq 30$ , is defined by

$$x(\bar{i} + 5) = (x(\bar{i} + 3) + x(\bar{i})) \bmod 2, \quad 0 \leq \bar{i} \leq 25$$

with initial conditions  $x(0) = 0$ ,  $x(1) = 0$ ,  $x(2) = 0$ ,  $x(3) = 0$ ,  $x(4) = 1$ .

The scrambling sequences  $z_1^{(m_0)}(n)$  and  $z_1^{(m_1)}(n)$  are defined by a cyclic shift of the m-sequence  $\tilde{z}(n)$  according to

$$z_1^{(m_0)}(n) = \tilde{z}((n + (m_0 \bmod B)) \bmod B)$$

$$z_1^{(m_1)}(n) = \tilde{z}((n + (m_1 \bmod B)) \bmod B)$$

where  $m_0$  and  $m_1$  are obtained from Table 6.11.2.1-1 and  $\tilde{z}(i) = 1 - 2x(i)$ ,  $0 \leq i \leq 30$ , is defined by

$$x(\bar{i} + 5) = (x(\bar{i} + 4) + x(\bar{i} + 2) + x(\bar{i} + 1) + x(\bar{i})) \bmod 2, \quad 0 \leq \bar{i} \leq 25$$

with initial conditions  $x(0) = 0$ ,  $x(1) = 0$ ,  $x(2) = 0$ ,  $x(3) = 0$ ,  $x(4) = 1$ .

**Table 6.11.2.1-1: Mapping between physical-layer cell-identity group  $N_{ID}^{(1)}$  and the indices  $m_0$  and  $m_1$**

| $N_{ID}^{(1)}$ | $m_0$ | $m_1$ | $N_{ID}^{(1)}$ | $m_0$ | $m_1$ | $N_{ID}^{(1)}$ | $m_0$ | $m_1$ | $N_{ID}^{(1)}$ | $m_0$ | $m_1$ | $N_{ID}^{(1)}$ | $m_0$ | $m_1$ |
|----------------|-------|-------|----------------|-------|-------|----------------|-------|-------|----------------|-------|-------|----------------|-------|-------|
| 0              | 0     | 1     | 34             | 4     | 6     | 68             | 9     | 12    | 102            | 15    | 19    | 136            | 22    | 27    |
| 1              | 1     | 2     | 35             | 5     | 7     | 69             | 10    | 13    | 103            | 16    | 20    | 137            | 23    | 28    |
| 2              | 2     | 3     | 36             | 6     | 8     | 70             | 11    | 14    | 104            | 17    | 21    | 138            | 24    | 29    |
| 3              | 3     | 4     | 37             | 7     | 9     | 71             | 12    | 15    | 105            | 18    | 22    | 139            | 25    | 30    |
| 4              | 4     | 5     | 38             | 8     | 10    | 72             | 13    | 16    | 106            | 19    | 23    | 140            | 0     | 6     |
| 5              | 5     | 6     | 39             | 9     | 11    | 73             | 14    | 17    | 107            | 20    | 24    | 141            | 1     | 7     |
| 6              | 6     | 7     | 40             | 10    | 12    | 74             | 15    | 18    | 108            | 21    | 25    | 142            | 2     | 8     |
| 7              | 7     | 8     | 41             | 11    | 13    | 75             | 16    | 19    | 109            | 22    | 26    | 143            | 3     | 9     |
| 8              | 8     | 9     | 42             | 12    | 14    | 76             | 17    | 20    | 110            | 23    | 27    | 144            | 4     | 10    |
| 9              | 9     | 10    | 43             | 13    | 15    | 77             | 18    | 21    | 111            | 24    | 28    | 145            | 5     | 11    |
| 10             | 10    | 11    | 44             | 14    | 16    | 78             | 19    | 22    | 112            | 25    | 29    | 146            | 6     | 12    |
| 11             | 11    | 12    | 45             | 15    | 17    | 79             | 20    | 23    | 113            | 26    | 30    | 147            | 7     | 13    |
| 12             | 12    | 13    | 46             | 16    | 18    | 80             | 21    | 24    | 114            | 0     | 5     | 148            | 8     | 14    |
| 13             | 13    | 14    | 47             | 17    | 19    | 81             | 22    | 25    | 115            | 1     | 6     | 149            | 9     | 15    |
| 14             | 14    | 15    | 48             | 18    | 20    | 82             | 23    | 26    | 116            | 2     | 7     | 150            | 10    | 16    |
| 15             | 15    | 16    | 49             | 19    | 21    | 83             | 24    | 27    | 117            | 3     | 8     | 151            | 11    | 17    |
| 16             | 16    | 17    | 50             | 20    | 22    | 84             | 25    | 28    | 118            | 4     | 9     | 152            | 12    | 18    |
| 17             | 17    | 18    | 51             | 21    | 23    | 85             | 26    | 29    | 119            | 5     | 10    | 153            | 13    | 19    |
| 18             | 18    | 19    | 52             | 22    | 24    | 86             | 27    | 30    | 120            | 6     | 11    | 154            | 14    | 20    |
| 19             | 19    | 20    | 53             | 23    | 25    | 87             | 0     | 4     | 121            | 7     | 12    | 155            | 15    | 21    |
| 20             | 20    | 21    | 54             | 24    | 26    | 88             | 1     | 5     | 122            | 8     | 13    | 156            | 16    | 22    |
| 21             | 21    | 22    | 55             | 25    | 27    | 89             | 2     | 6     | 123            | 9     | 14    | 157            | 17    | 23    |
| 22             | 22    | 23    | 56             | 26    | 28    | 90             | 3     | 7     | 124            | 10    | 15    | 158            | 18    | 24    |
| 23             | 23    | 24    | 57             | 27    | 29    | 91             | 4     | 8     | 125            | 11    | 16    | 159            | 19    | 25    |
| 24             | 24    | 25    | 58             | 28    | 30    | 92             | 5     | 9     | 126            | 12    | 17    | 160            | 20    | 26    |
| 25             | 25    | 26    | 59             | 0     | 3     | 93             | 6     | 10    | 127            | 13    | 18    | 161            | 21    | 27    |
| 26             | 26    | 27    | 60             | 1     | 4     | 94             | 7     | 11    | 128            | 14    | 19    | 162            | 22    | 28    |
| 27             | 27    | 28    | 61             | 2     | 5     | 95             | 8     | 12    | 129            | 15    | 20    | 163            | 23    | 29    |
| 28             | 28    | 29    | 62             | 3     | 6     | 96             | 9     | 13    | 130            | 16    | 21    | 164            | 24    | 30    |
| 29             | 29    | 30    | 63             | 4     | 7     | 97             | 10    | 14    | 131            | 17    | 22    | 165            | 0     | 7     |
| 30             | 0     | 2     | 64             | 5     | 8     | 98             | 11    | 15    | 132            | 18    | 23    | 166            | 1     | 8     |
| 31             | 1     | 3     | 65             | 6     | 9     | 99             | 12    | 16    | 133            | 19    | 24    | 167            | 2     | 9     |
| 32             | 2     | 4     | 66             | 7     | 10    | 100            | 13    | 17    | 134            | 20    | 25    | -              | -     | -     |
| 33             | 3     | 5     | 67             | 8     | 11    | 101            | 14    | 18    | 135            | 21    | 26    | -              | -     | -     |

### 6.11.2.2 Mapping to resource elements

The mapping of the sequence to resource elements depends on the frame structure. In a subframe for frame structure type 1 and 3 and in a half-frame for frame structure type 2, the same antenna port as for the primary synchronization signal shall be used for the secondary synchronization signal.

For an MBMS-dedicated cell configured with CAS muting, the secondary synchronization signal shall only be transmitted in the first  $4K_{CAS}$  frames, starting in frames fulfilling  $n_f \bmod 16N_{CAS} = 0$  where  $N_{CAS} \in \{2, 4, 8, 16\}$  and  $K_{CAS} \in \{4, 5, 6, \dots, 63\}$  are given by the higher-layer parameter *cas-MutingConfig*.

The sequence  $d(n)$  shall be mapped to resource elements according to

$$a_{k,l} = d(n), \quad n = 0, \dots, 61$$

$$k = n - 31 + \frac{N_{\text{RB}}^{\text{DL}} N_{\text{sc}}^{\text{RB}}}{2}$$

$$l = \begin{cases} N_{\text{symb}}^{\text{DL}} - 2 & \text{in slots 0 and 10} & \text{for frame structure type 1 except for an MBMS- dedicated cell} \\ N_{\text{symb}}^{\text{DL}} - 1 & \text{in slots 1 and 11} & \text{for frame structure type 2} \\ N_{\text{symb}}^{\text{DL}} - 2 & \text{in slots where the PSS is transmitted} & \text{for frame structure type 3} \\ N_{\text{symb}}^{\text{DL}} - 2 & \text{in slots where the PSS is transmitted} & \text{for an MBMS- dedicated cell} \end{cases}$$

Resource elements  $(k, l)$  where

$$k = n - 31 + \frac{N_{\text{RB}}^{\text{DL}} N_{\text{sc}}^{\text{RB}}}{2}$$

$$l = \begin{cases} N_{\text{symb}}^{\text{DL}} - 2 & \text{in slots 0 and 10} & \text{for frame structure type 1 except for an MBMS - dedicated cell} \\ N_{\text{symb}}^{\text{DL}} - 1 & \text{in slots 1 and 11} & \text{for frame structure type 2} \\ N_{\text{symb}}^{\text{DL}} - 2 & \text{in slots where the PSS is transmitted} & \text{for frame structure type 3} \\ N_{\text{symb}}^{\text{DL}} - 2 & \text{in slots where the PSS is transmitted} & \text{for an MBMS - dedicated cell} \end{cases}$$

$$n = -5, -4, \dots, -1, 62, 63, \dots, 66$$

are reserved and not used for transmission of the secondary synchronization signal.

### 6.11.3 Resynchronization signal (RSS)

#### 6.11.3.1 Sequence generation

The resynchronization signal (RSS) is transmitted in  $N_{\text{RSS}}$  subframes numbered  $i = 0, 1, \dots, N_{\text{RSS}} - 1$ , where the RSS duration  $N_{\text{RSS}}$  is configured by higher layers. The sequence  $d_i(n)$  used for the  $i$ th RSS subframe is generated according to

$$d_i(n) = \frac{1-2c(2n)}{\sqrt{2}} + j b(i) \frac{1-2c(2n+1)}{\sqrt{2}}, \quad n = 0, 1, \dots, 263$$

where the pseudo-random sequence  $c(n)$  is defined in clause 7.2. The pseudo-random sequence generator shall be initialised each subframe with  $c_{\text{init}} = N_{\text{ID}}^{\text{cell}} + 2^9 u$ , where  $u$  equals the value of the higher-layer parameter *systemInfoUnchanged-BR-r15* as set in subframe  $i = 0$ .  $b(i)$  is given by Table 6.11.3.1-1.

**Table 6.11.3.1-1: Definition of  $b(i)$ .**

| $N_{\text{RSS}}$ | $b(0), b(1), \dots, b(N_{\text{RSS}} - 1)$                                                                         |
|------------------|--------------------------------------------------------------------------------------------------------------------|
| 8                | [ 1, 1, -1, 1, -1, -1, 1, 1 ]                                                                                      |
| 16               | [ 1, 1, -1, -1, 1, -1, 1, 1, 1, -1, -1, 1, 1, -1, 1, -1 ]                                                          |
| 32               | [ -1, -1, 1, 1, -1, 1, 1, -1, 1, -1, -1, -1, 1, 1, 1, -1, -1, -1, 1, -1, 1, -1, 1, 1, -1, -1, 1, 1, -1, -1 ]       |
| 40               | [ 1, -1, -1, 1, -1, -1, 1, 1, 1, -1, 1, -1, 1, 1, -1, -1, -1, 1, -1, -1, -1, 1, 1, 1, -1, -1, 1, -1, 1, -1, 1, 1 ] |

#### 6.11.3.2 Mapping to resource elements

If only one CRS port is configured in a cell, the UE may assume that the same antenna port is used for all subframes in an RSS transmission in the cell. Otherwise, the UE may assume that the same antenna port is used for RSS transmission in absolute subframes  $2n$  and  $2n + 1$  and  $n = 0, 1, \dots$

An RSS is transmitted in  $N_{\text{RSS}}$  consecutive BL/CE DL subframes, starting in the first BL/CE DL subframe in a radio frame satisfying

$$(n_f \bmod \frac{P_{\text{RSS}}}{10}) = O_{\text{RSS}}$$

where the RSS periodicity  $P_{\text{RSS}}$  and the RSS time offset  $O_{\text{RSS}}$  are configured by higher layers. In frequency domain, the RSS frequency location is assigned to the 24 subcarriers in the physical resource blocks numbers  $n_{\text{PRB,RSS}}$  and  $n_{\text{PRB,RSS}} + 1$ , as configured by higher layers.

In each subframe  $i$  used for RSS transmission, the RSS sequence  $d_i(n)$  shall be mapped to resource elements  $(k, l)$  in sequence, starting with  $d_i(0)$  in increasing order of first the index  $k = 0, 1, \dots, 2N_{\text{sc}}^{\text{RB}} - 1$ , over the 24 assigned subcarriers and then the index  $l = 3, 4, \dots, 2N_{\text{symb}}^{\text{DL}} - 1$ .

A resource element  $(k, l)$  overlapping with resource elements where cell-specific reference signals according to clause 6.10 are transmitted shall not be used for RSS transmission but is counted in the mapping process. Additionally, an RSS subframe is dropped if any RSS PRB pair overlaps with any PRB pair carrying PSS, SSS, PBCH or PDSCH associated with SI-RNTI. In frame structure type 2, those special subframes, indicated as BL/CE DL subframes by higher layer *fdd-DownlinkOrTddSubframeBitmapBR*, are not counted in RSS mapping and are not used for transmission of RSS.

## 6.11A Discovery signal

A discovery signal occasion for a cell consists of a period with a duration of

- one to five consecutive subframes for frame structure type 1
- two to five consecutive subframes for frame structure type 2
- 12 OFDM symbols within one non-empty subframe for frame structure type 3

where the UE in the downlink subframes may assume presence of a discovery signal consisting of

- cell-specific reference signals on antenna port 0 in all downlink subframes and in DwPTS of all special subframes in the period for frame structure type 1 and 2
- cell specific reference signals on antenna port 0 when higher layer parameters indicate only one configured antenna port for cell specific reference signals for a serving cell using frame structure type 3
- cell specific reference signals on antenna port 0 and antenna port 1 when higher layer parameters indicate at least two configured antenna ports for cell specific reference signals for a serving cell using frame structure type 3
- cell specific reference signals on antenna port 0 and antenna port 1 when higher layer configured parameter *presenceAntennaPort1* is signalled to be 1, for a neighbour cell when using frame structure type 3
- primary synchronization signal in the first subframe of the period for frame structure types 1 and 3 or the second subframe of the period for frame structure type 2,
- secondary synchronization signal in the first subframe of the period, and
- non-zero-power CSI reference signals in zero or more subframes in the period. The configuration of non-zero-power CSI reference signals part of the discovery signal is obtained as described in clause 6.10.5.2

For frame structures 1 and 2 the UE may assume a discovery signal occasion once every *dmtc-Periodicity*.

For frame structure type 3, the UE may assume a discovery signal occasion may occur in any subframe within the discovery signals measurement timing configuration in clause 5.5.2.10 of [9].

For frame structure type 3, simultaneous transmission of a discovery signal and PDSCH/PDCCH/EPDCCH may occur in subframes 0 and 5 only.

For frame structure type 3, the UE may assume that a discovery signal occasion occurs in the first subframe containing a primary synchronization signal, secondary synchronization signal and cell-specific reference signals within the discovery measurement timing configuration in clause 5.5.2.10 of [9].

## 6.11B MTC wake-up signal (MWUS)

### 6.11B.1 Sequence generation

The MWUS sequence  $w(m)$  in subframe  $x=0,1,\dots,M-1$  is defined by

$$w(m) = \theta_{n_f, n_s}(m') e^{-j \frac{\pi u n(n+1)}{131}} e^{j \frac{2\pi g m}{132}}$$

$$m = 0, 1, \dots, 131$$

$$m' = m + 132x$$

$$n = m \bmod 132$$

$$\theta_{n_f, n_s}(m') = \begin{cases} 1 & \text{if } c_{n_f, n_s}(2m') = 0 \text{ and } c_{n_f, n_s}(2m' + 1) = 0 \\ -1 & \text{if } c_{n_f, n_s}(2m') = 0 \text{ and } c_{n_f, n_s}(2m' + 1) = 1 \\ j & \text{if } c_{n_f, n_s}(2m') = 1 \text{ and } c_{n_f, n_s}(2m' + 1) = 0 \\ -j & \text{if } c_{n_f, n_s}(2m') = 1 \text{ and } c_{n_f, n_s}(2m' + 1) = 1 \end{cases}$$

$$u = (N_{\text{ID}}^{\text{cell}} \bmod 126) + 3$$

where  $M$  is the actual duration of MWUS as defined in [4]. For a UE not configured with group MWUS,  $g = 0$ . For a UE configured with group MWUS,  $g = 14(N_{\text{group}}^{\text{WUS}} + 1)$  for  $0 \leq N_{\text{group}}^{\text{WUS}} \leq 7$ , where  $N_{\text{group}}^{\text{WUS}}$  is determined by the UE group to which the UE is associated as determined by higher layers [10]. In a resource that is not shared with non-group MWUS, the common MWUS sequence shall be determined by  $g = 126$ . In a resource that is shared with non-group MWUS, the common MWUS sequence is determined by higher layers [9].

The scrambling sequence  $c_{n_f, n_s}(i)$ ,  $i = 0, 1, \dots, 2 \cdot 132M - 1$  is given by clause 7.2, and shall be initialized at the start of the MWUS with

$$c_{\text{init\_WUS}} = (N_{\text{ID}}^{\text{cell}} + 1) \left( \left( 10n_{f, \text{start\_PO}} + \left\lfloor \frac{n_{s, \text{start\_PO}}}{2} \right\rfloor \right) \bmod 2048 + 1 \right) 2^9 + N_{\text{ID}}^{\text{cell}} + N_{\text{ID}}^{\text{resource}} \cdot 2^{29}$$

where  $n_{f, \text{start\_PO}}$  is the first frame of the first PO to which the MWUS is associated,  $n_{s, \text{start\_PO}}$  is the first slot of the first PO to which the MWUS is associated and  $N_{\text{ID}}^{\text{resource}}$  indicates the group MWUS resource to which the UE is associated. For a UE not configured with group MWUS,  $N_{\text{ID}}^{\text{resource}} = 0$ , whereas for a UE configured with group MWUS,  $N_{\text{ID}}^{\text{resource}}$  is determined by higher layers [10].

### 6.11B.2 Mapping to resource elements

The same antenna port shall be used for all symbols of the MWUS within a subframe. The UE shall not assume that the MWUS is transmitted on the same antenna port as any of the downlink reference signals or synchronization signals. If only one CRS port is configured by the eNB, the UE may assume the transmission of all MWUS subframes is using the same antenna port; otherwise, the UE may assume the same antenna port is used for MWUS transmission in downlink subframes  $w0 + 2n$  and  $w0 + 2n + 1$ , where  $w0$  is the first downlink subframe of the MWUS transmission as specified in [4], and  $n=0, 1, \dots$

The MWUS bandwidth is 2 consecutive PRBs, the frequency location of the lowermost PRB with  $N_{\text{ID}}^{\text{resource}} = 0$  is signaled by higher layers. For both PRB pairs in the frequency domain, for which MWUS is defined, the MWUS sequence  $w(m)$  shall be mapped to resource elements  $(k, l)$  in sequence, starting with  $w(0)$  in increasing order of first the index  $k = 0, 1, \dots, N_{\text{sc}}^{\text{RB}} - 1$ , over the 12 assigned subcarriers and then the index  $l = 3, 4, \dots, 2N_{\text{sym}}^{\text{DL}} - 1$  in each subframe in which MWUS is transmitted.

The MWUS sequence is mapped to the set of subframes in the actual MWUS duration as defined in [4], where in a subframe in which an MWUS PRB pair overlaps with any PRB pair carrying PSS, SSS, RSS, PBCH or PDSCH associated with SI-RNTI is transmitted, the subframe is counted in the MWUS mapping but not used for transmission of MWUS. In frame structure type 2, those special subframes, indicated as BL/CE DL subframes by higher layer *fdd-DownlinkOrTddSubframeBitmapBR*, are not counted in MWUS mapping and are not used for transmission of MWUS.

A resource element  $(k, l)$  overlapping with resource elements where cell-specific reference signals according to clause

6.10 are transmitted shall not be used for MWUS transmission but is counted in the mapping process.

## 6.12 OFDM baseband signal generation

The time-continuous signal  $s_l^{(p)}(t)$  on antenna port  $p$  in OFDM symbol  $l$  in a downlink slot is defined by

$$s_l^{(p)}(t) = \sum_{k=-\lfloor N_{\text{RB}}^{\text{DL}} N_{\text{sc}}^{\text{RB}} / 2 \rfloor}^{-1} a_{k^{(-)},l}^{(p)} \cdot e^{j2\pi k \Delta f (t - N_{\text{CP},l} T_s)} + \sum_{k=1}^{\lfloor N_{\text{RB}}^{\text{DL}} N_{\text{sc}}^{\text{RB}} / 2 \rfloor} a_{k^{(+)},l}^{(p)} \cdot e^{j2\pi k \Delta f (t - N_{\text{CP},l} T_s)}$$

for  $0 \leq t < (N_{\text{CP},l} + N) \times T_s$  where  $k^{(-)} = k + \lfloor N_{\text{RB}}^{\text{DL}} N_{\text{sc}}^{\text{RB}} / 2 \rfloor$  and  $k^{(+)} = k + \lfloor N_{\text{RB}}^{\text{DL}} N_{\text{sc}}^{\text{RB}} / 2 \rfloor - 1$ . The variable  $N$  equals 2048 for  $\Delta f = 15$  kHz subcarrier spacing, 4096 for  $\Delta f = 7.5$  kHz subcarrier spacing, 12288 for  $\Delta f = 2.5$  kHz, 24576 for  $\Delta f = 1.25$  kHz subcarrier spacing, and 82944 for  $\Delta f = 1/(82944 T_s) \approx 0.37$  kHz.

For frame structure type 3, if PDCCH is to be transmitted in a subframe starting with OFDM symbol  $s_0^{(p)}(t)$  based on the received uplink control information that indicates channel occupancy time sharing '1' as specified in [11], OFDM symbol  $s_l^{(p)}(t), l = 13$  in the previous subframe may be transmitted, given by

$$s_{13}^{(p)}(t) = \begin{cases} 0 & 0 \leq t < 768 T_s \\ s_0^{(p)}(t - N_{\text{CP},13} T_s) & 768 T_s \leq t < (N_{\text{CP},13} + N) T_s \end{cases}$$

The OFDM symbols in a slot shall be transmitted in increasing order of  $l$ , starting with  $l = 0$ , where OFDM symbol  $l > 0$  starts at time  $\sum_{l'=0}^{l-1} (N_{\text{CP},l'} + N) T_s$  within the slot. In case the first OFDM symbol(s) in a slot use normal cyclic prefix and the remaining OFDM symbols use extended cyclic prefix, the starting position the OFDM symbols with extended cyclic prefix shall be identical to those in a slot where all OFDM symbols use extended cyclic prefix. Thus there will be a part of the time slot between the two cyclic prefix regions where the transmitted signal is not specified. For  $\Delta f = 1.25$  kHz, there is one OFDM symbol per slot and one slot per subframe. For  $\Delta f \approx 0.37$  kHz, there is one OFDM symbol per slot and one slot per 3ms.

Table 6.12-1 lists the value of  $N_{\text{CP},l}$  that shall be used. Note that different OFDM symbols within a slot in some cases have different cyclic prefix lengths.

In case NB-IoT is supported, the OFDM baseband signal generation is defined in clause 10.2.8.

**Table 6.12-1: OFDM parameters**

| Configuration          |                             | Cyclic prefix length $N_{\text{CP},l}$          |
|------------------------|-----------------------------|-------------------------------------------------|
| Normal cyclic prefix   | $\Delta f = 15$ kHz         | 160 for $l = 0$<br>144 for $l = 1, 2, \dots, 6$ |
|                        | $\Delta f = 15$ kHz         | 512 for $l = 0, 1, \dots, 5$                    |
| Extended cyclic prefix | $\Delta f = 7.5$ kHz        | 1024 for $l = 0, 1, 2$                          |
|                        | $\Delta f = 2.5$ kHz        | 3072 for $l = 0$                                |
|                        | $\Delta f = 1.25$ kHz       | 6144 for $l = 0$                                |
|                        | $\Delta f \approx 0.37$ kHz | 9216 for $l = 0$                                |

## 6.13 Modulation and upconversion

Modulation and upconversion to the carrier frequency of the complex-valued OFDM baseband signal for each antenna port is shown in Figure 6.13-1. The filtering required prior to transmission is defined by the requirements in TS 36.104 [6].

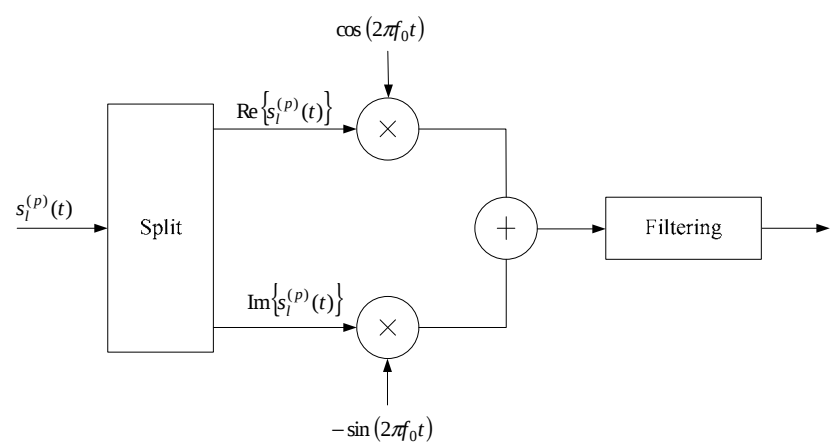


Figure 6.13-1: Downlink modulation

## 7 Generic functions

### 7.1 Modulation mapper

The modulation mapper takes binary digits, 0 or 1, as input and produces complex-valued modulation symbols,  $x$  as output.

#### 7.1.1 BPSK

In case of BPSK modulation, a single bit,  $b(i)$ , is mapped to a complex-valued modulation symbol  $x=I+jQ$  according to Table 7.1.1-1.

**Table 7.1.1-1: BPSK modulation mapping**

| $b(i)$ | $I$           | $Q$           |
|--------|---------------|---------------|
| 0      | $1/\sqrt{2}$  | $1/\sqrt{2}$  |
| 1      | $-1/\sqrt{2}$ | $-1/\sqrt{2}$ |

#### 7.1.2 QPSK

In case of QPSK modulation, pairs of bits,  $b(i), b(i+1)$ , are mapped to complex-valued modulation symbols  $x$  according to Table 7.1.2-1 where  $x = I + jQ$  unless "MUST interference presence and power ratio (*MUSTIdx*)" is

signalled in the associated DCI and is not '00' in which case  $x = e^{j\phi_0\pi}c(I-d) + e^{j(\phi_1+1/2)\pi}c(Q-d)$  where  $c$  and  $d$  are determined from *MUSTIdx* using Table 7.1.2-2, and each  $\phi_0, \phi_1 \in \{0,1\}$  is selected by eNB independently of  $b(i), b(i+1)$ .

**Table 7.1.2-1: QPSK modulation mapping**

| $b(i), b(i+1)$ | $I$           | $Q$           |
|----------------|---------------|---------------|
| 00             | $1/\sqrt{2}$  | $1/\sqrt{2}$  |
| 01             | $1/\sqrt{2}$  | $-1/\sqrt{2}$ |
| 10             | $-1/\sqrt{2}$ | $1/\sqrt{2}$  |
| 11             | $-1/\sqrt{2}$ | $-1/\sqrt{2}$ |

**Table 7.1.2-2: Values for  $C$  and  $d$  for QPSK**

| <i>MUSTIdx</i> | $c$             | $d$              |
|----------------|-----------------|------------------|
| 01             | $\sqrt{1/5}$    | $\sqrt{2}$       |
| 10             | $2/\sqrt{29}$   | $5/(2\sqrt{2})$  |
| 11             | $7\sqrt{1/578}$ | $23/(7\sqrt{2})$ |

#### 7.1.3 16QAM

In case of 16QAM modulation, quadruplets of bits,  $b(i), b(i+1), b(i+2), b(i+3)$ , are mapped to complex-valued

modulation symbols  $x$  according to Table 7.1.3-1 where  $x = I + jQ$  unless "MUST interference presence and power ratio ( $MUSTIdx$ )" is signalled in the associated DCI and is not '00' in which case  $x = e^{j\phi_0\pi}c(I-d) + e^{j(\phi_0+1/2)\pi}c(Q-d)$  where  $c$  and  $d$  are determined from  $MUSTIdx$  using Table 7.1.3-2, and each  $\phi_0, \phi_1 \in \{0,1\}$  is selected by eNB independently of  $b(i), b(i+1), b(i+2), b(i+3)$ .

**Table 7.1.3-1: 16QAM modulation mapping**

| $b(i), b(i+1), b(i+2), b(i+3)$ | $I$            | $Q$            |
|--------------------------------|----------------|----------------|
| 0000                           | $1/\sqrt{10}$  | $1/\sqrt{10}$  |
| 0001                           | $1/\sqrt{10}$  | $3/\sqrt{10}$  |
| 0010                           | $3/\sqrt{10}$  | $1/\sqrt{10}$  |
| 0011                           | $3/\sqrt{10}$  | $3/\sqrt{10}$  |
| 0100                           | $1/\sqrt{10}$  | $-1/\sqrt{10}$ |
| 0101                           | $1/\sqrt{10}$  | $-3/\sqrt{10}$ |
| 0110                           | $3/\sqrt{10}$  | $-1/\sqrt{10}$ |
| 0111                           | $3/\sqrt{10}$  | $-3/\sqrt{10}$ |
| 1000                           | $-1/\sqrt{10}$ | $1/\sqrt{10}$  |
| 1001                           | $-1/\sqrt{10}$ | $3/\sqrt{10}$  |
| 1010                           | $-3/\sqrt{10}$ | $1/\sqrt{10}$  |
| 1011                           | $-3/\sqrt{10}$ | $3/\sqrt{10}$  |
| 1100                           | $-1/\sqrt{10}$ | $-1/\sqrt{10}$ |
| 1101                           | $-1/\sqrt{10}$ | $-3/\sqrt{10}$ |
| 1110                           | $-3/\sqrt{10}$ | $-1/\sqrt{10}$ |
| 1111                           | $-3/\sqrt{10}$ | $-3/\sqrt{10}$ |

**Table 7.1.3-2: Values for  $C$  and  $d$  for 16QAM**

| $MUSTIdx$ | $c$             | $d$               |
|-----------|-----------------|-------------------|
| 01        | $\sqrt{5/21}$   | $2\sqrt{2/5}$     |
| 10        | $3\sqrt{5/334}$ | $17/(3\sqrt{10})$ |
| 11        | $\sqrt{5/69}$   | $4\sqrt{2/5}$     |

## 7.1.4 64QAM

In case of 64QAM modulation, hexuplets of bits,  $b(i), b(i+1), b(i+2), b(i+3), b(i+4), b(i+5)$ , are mapped to complex-valued modulation symbols  $x$  according to Table 7.1.4-1 where  $x = I + jQ$  unless "MUST interference presence and power ratio ( $MUSTIdx$ )" is signalled in the associated DCI and is not '00' in which case

$x = e^{j\phi_0\pi}c(I-d) + e^{j(\phi_0+1/2)\pi}c(Q-d)$  where  $c$  and  $d$  are determined from  $MUSTIdx$  using Table 7.1.4-2, and each  $\phi_0, \phi_1 \in \{0,1\}$  is selected by eNB independently of  $b(i), b(i+1), b(i+2), b(i+3), b(i+4), b(i+5)$ .

Table 7.1.4-1: 64QAM modulation mapping

| $b(i), b(i+1), b(i+2), b(i+3), b(i+4), b(i+5)$ | $I$           | $Q$            | $b(i), b(i+1), b(i+2), b(i+3), b(i+4), b(i+5)$ | $I$            | $Q$            |
|------------------------------------------------|---------------|----------------|------------------------------------------------|----------------|----------------|
| 000000                                         | $3/\sqrt{42}$ | $3/\sqrt{42}$  | 100000                                         | $-3/\sqrt{42}$ | $3/\sqrt{42}$  |
| 000001                                         | $3/\sqrt{42}$ | $1/\sqrt{42}$  | 100001                                         | $-3/\sqrt{42}$ | $1/\sqrt{42}$  |
| 000010                                         | $1/\sqrt{42}$ | $3/\sqrt{42}$  | 100010                                         | $-1/\sqrt{42}$ | $3/\sqrt{42}$  |
| 000011                                         | $1/\sqrt{42}$ | $1/\sqrt{42}$  | 100011                                         | $-1/\sqrt{42}$ | $1/\sqrt{42}$  |
| 000100                                         | $3/\sqrt{42}$ | $5/\sqrt{42}$  | 100100                                         | $-3/\sqrt{42}$ | $5/\sqrt{42}$  |
| 000101                                         | $3/\sqrt{42}$ | $7/\sqrt{42}$  | 100101                                         | $-3/\sqrt{42}$ | $7/\sqrt{42}$  |
| 000110                                         | $1/\sqrt{42}$ | $5/\sqrt{42}$  | 100110                                         | $-1/\sqrt{42}$ | $5/\sqrt{42}$  |
| 000111                                         | $1/\sqrt{42}$ | $7/\sqrt{42}$  | 100111                                         | $-1/\sqrt{42}$ | $7/\sqrt{42}$  |
| 001000                                         | $5/\sqrt{42}$ | $3/\sqrt{42}$  | 101000                                         | $-5/\sqrt{42}$ | $3/\sqrt{42}$  |
| 001001                                         | $5/\sqrt{42}$ | $1/\sqrt{42}$  | 101001                                         | $-5/\sqrt{42}$ | $1/\sqrt{42}$  |
| 001010                                         | $7/\sqrt{42}$ | $3/\sqrt{42}$  | 101010                                         | $-7/\sqrt{42}$ | $3/\sqrt{42}$  |
| 001011                                         | $7/\sqrt{42}$ | $1/\sqrt{42}$  | 101011                                         | $-7/\sqrt{42}$ | $1/\sqrt{42}$  |
| 001100                                         | $5/\sqrt{42}$ | $5/\sqrt{42}$  | 101100                                         | $-5/\sqrt{42}$ | $5/\sqrt{42}$  |
| 001101                                         | $5/\sqrt{42}$ | $7/\sqrt{42}$  | 101101                                         | $-5/\sqrt{42}$ | $7/\sqrt{42}$  |
| 001110                                         | $7/\sqrt{42}$ | $5/\sqrt{42}$  | 101110                                         | $-7/\sqrt{42}$ | $5/\sqrt{42}$  |
| 001111                                         | $7/\sqrt{42}$ | $7/\sqrt{42}$  | 101111                                         | $-7/\sqrt{42}$ | $7/\sqrt{42}$  |
| 010000                                         | $3/\sqrt{42}$ | $-3/\sqrt{42}$ | 110000                                         | $-3/\sqrt{42}$ | $-3/\sqrt{42}$ |
| 010001                                         | $3/\sqrt{42}$ | $-1/\sqrt{42}$ | 110001                                         | $-3/\sqrt{42}$ | $-1/\sqrt{42}$ |
| 010010                                         | $1/\sqrt{42}$ | $-3/\sqrt{42}$ | 110010                                         | $-1/\sqrt{42}$ | $-3/\sqrt{42}$ |
| 010011                                         | $1/\sqrt{42}$ | $-1/\sqrt{42}$ | 110011                                         | $-1/\sqrt{42}$ | $-1/\sqrt{42}$ |
| 010100                                         | $3/\sqrt{42}$ | $-5/\sqrt{42}$ | 110100                                         | $-3/\sqrt{42}$ | $-5/\sqrt{42}$ |
| 010101                                         | $3/\sqrt{42}$ | $-7/\sqrt{42}$ | 110101                                         | $-3/\sqrt{42}$ | $-7/\sqrt{42}$ |
| 010110                                         | $1/\sqrt{42}$ | $-5/\sqrt{42}$ | 110110                                         | $-1/\sqrt{42}$ | $-5/\sqrt{42}$ |
| 010111                                         | $1/\sqrt{42}$ | $-7/\sqrt{42}$ | 110111                                         | $-1/\sqrt{42}$ | $-7/\sqrt{42}$ |
| 011000                                         | $5/\sqrt{42}$ | $-3/\sqrt{42}$ | 111000                                         | $-5/\sqrt{42}$ | $-3/\sqrt{42}$ |
| 011001                                         | $5/\sqrt{42}$ | $-1/\sqrt{42}$ | 111001                                         | $-5/\sqrt{42}$ | $-1/\sqrt{42}$ |
| 011010                                         | $7/\sqrt{42}$ | $-3/\sqrt{42}$ | 111010                                         | $-7/\sqrt{42}$ | $-3/\sqrt{42}$ |
| 011011                                         | $7/\sqrt{42}$ | $-1/\sqrt{42}$ | 111011                                         | $-7/\sqrt{42}$ | $-1/\sqrt{42}$ |
| 011100                                         | $5/\sqrt{42}$ | $-5/\sqrt{42}$ | 111100                                         | $-5/\sqrt{42}$ | $-5/\sqrt{42}$ |
| 011101                                         | $5/\sqrt{42}$ | $-7/\sqrt{42}$ | 111101                                         | $-5/\sqrt{42}$ | $-7/\sqrt{42}$ |

|        |               |                |        |                |                |
|--------|---------------|----------------|--------|----------------|----------------|
| 011110 | $7/\sqrt{42}$ | $-5/\sqrt{42}$ | 111110 | $-7/\sqrt{42}$ | $-5/\sqrt{42}$ |
| 011111 | $7/\sqrt{42}$ | $-7/\sqrt{42}$ | 111111 | $-7/\sqrt{42}$ | $-7/\sqrt{42}$ |

Table 7.1.4-2: Values for  $C$  and  $d$  for 64QAM

| <i>MUSTIdx</i> | $c$            | $d$            |
|----------------|----------------|----------------|
| 01             | $\sqrt{21/85}$ | $4\sqrt{2/21}$ |
| 10             | $\sqrt{7/34}$  | $3\sqrt{3/14}$ |
| 11             | $\sqrt{7/55}$  | $2\sqrt{6/7}$  |

## 7.1.5 256QAM

In case of 256QAM modulation, octuplets of bits,  $b(i), b(i+1), b(i+2), b(i+3), b(i+4), b(i+5), b(i+6), b(i+7)$ , are mapped to complex-valued modulation symbols  $x = (I + jQ)/\sqrt{170}$  according to Table 7.1.5-1.

Table 7.1.5-1: 256QAM modulation mapping

| $b(i), \dots, b(i+7)$ | $I$ | $Q$ | $b(i), \dots, b(i+7)$ | $I$ | $Q$ | $b(i), \dots, b(i+7)$ | $I$ | $Q$ | $b(i), \dots, b(i+7)$ | $I$ | $Q$ |
|-----------------------|-----|-----|-----------------------|-----|-----|-----------------------|-----|-----|-----------------------|-----|-----|
| 00000000              | 5   | 5   | 01000000              | 5   | -5  | 10000000              | -5  | 5   | 11000000              | -5  | -5  |
| 00000001              | 5   | 7   | 01000001              | 5   | -7  | 10000001              | -5  | 7   | 11000001              | -5  | -7  |
| 00000010              | 7   | 5   | 01000010              | 7   | -5  | 10000010              | -7  | 5   | 11000010              | -7  | -5  |
| 00000011              | 7   | 7   | 01000011              | 7   | -7  | 10000011              | -7  | 7   | 11000011              | -7  | -7  |
| 00000100              | 5   | 3   | 01000100              | 5   | -3  | 10000100              | -5  | 3   | 11000100              | -5  | -3  |
| 00000101              | 5   | 1   | 01000101              | 5   | -1  | 10000101              | -5  | 1   | 11000101              | -5  | -1  |
| 00000110              | 7   | 3   | 01000110              | 7   | -3  | 10000110              | -7  | 3   | 11000110              | -7  | -3  |
| 00000111              | 7   | 1   | 01000111              | 7   | -1  | 10000111              | -7  | 1   | 11000111              | -7  | -1  |
| 00001000              | 3   | 5   | 01001000              | 3   | -5  | 10001000              | -3  | 5   | 11001000              | -3  | -5  |
| 00001001              | 3   | 7   | 01001001              | 3   | -7  | 10001001              | -3  | 7   | 11001001              | -3  | -7  |
| 00001010              | 1   | 5   | 01001010              | 1   | -5  | 10001010              | -1  | 5   | 11001010              | -1  | -5  |
| 00001011              | 1   | 7   | 01001011              | 1   | -7  | 10001011              | -1  | 7   | 11001011              | -1  | -7  |
| 00001100              | 3   | 3   | 01001100              | 3   | -3  | 10001100              | -3  | 3   | 11001100              | -3  | -3  |
| 00001101              | 3   | 1   | 01001101              | 3   | -1  | 10001101              | -3  | 1   | 11001101              | -3  | -1  |
| 00001110              | 1   | 3   | 01001110              | 1   | -3  | 10001110              | -1  | 3   | 11001110              | -1  | -3  |
| 00001111              | 1   | 1   | 01001111              | 1   | -1  | 10001111              | -1  | 1   | 11001111              | -1  | -1  |
| 00010000              | 5   | 11  | 01010000              | 5   | -11 | 10010000              | -5  | 11  | 11010000              | -5  | -11 |
| 00010001              | 5   | 9   | 01010001              | 5   | -9  | 10010001              | -5  | 9   | 11010001              | -5  | -9  |
| 00010010              | 7   | 11  | 01010010              | 7   | -11 | 10010010              | -7  | 11  | 11010010              | -7  | -11 |
| 00010011              | 7   | 9   | 01010011              | 7   | -9  | 10010011              | -7  | 9   | 11010011              | -7  | -9  |
| 00010100              | 5   | 13  | 01010100              | 5   | -13 | 10010100              | -5  | 13  | 11010100              | -5  | -13 |
| 00010101              | 5   | 15  | 01010101              | 5   | -15 | 10010101              | -5  | 15  | 11010101              | -5  | -15 |
| 00010110              | 7   | 13  | 01010110              | 7   | -13 | 10010110              | -7  | 13  | 11010110              | -7  | -13 |
| 00010111              | 7   | 15  | 01010111              | 7   | -15 | 10010111              | -7  | 15  | 11010111              | -7  | -15 |
| 00011000              | 3   | 11  | 01011000              | 3   | -11 | 10011000              | -3  | 11  | 11011000              | -3  | -11 |
| 00011001              | 3   | 9   | 01011001              | 3   | -9  | 10011001              | -3  | 9   | 11011001              | -3  | -9  |
| 00011010              | 1   | 11  | 01011010              | 1   | -11 | 10011010              | -1  | 11  | 11011010              | -1  | -11 |
| 00011011              | 1   | 9   | 01011011              | 1   | -9  | 10011011              | -1  | 9   | 11011011              | -1  | -9  |
| 00011100              | 3   | 13  | 01011100              | 3   | -13 | 10011100              | -3  | 13  | 11011100              | -3  | -13 |
| 00011101              | 3   | 15  | 01011101              | 3   | -15 | 10011101              | -3  | 15  | 11011101              | -3  | -15 |
| 00011110              | 1   | 13  | 01011110              | 1   | -13 | 10011110              | -1  | 13  | 11011110              | -1  | -13 |
| 00011111              | 1   | 15  | 01011111              | 1   | -15 | 10011111              | -1  | 15  | 11011111              | -1  | -15 |
| 00100000              | 11  | 5   | 01100000              | 11  | -5  | 10100000              | -11 | 5   | 11100000              | -11 | -5  |
| 00100001              | 11  | 7   | 01100001              | 11  | -7  | 10100001              | -11 | 7   | 11100001              | -11 | -7  |
| 00100010              | 9   | 5   | 01100010              | 9   | -5  | 10100010              | -9  | 5   | 11100010              | -9  | -5  |
| 00100011              | 9   | 7   | 01100011              | 9   | -7  | 10100011              | -9  | 7   | 11100011              | -9  | -7  |
| 00100100              | 11  | 3   | 01100100              | 11  | -3  | 10100100              | -11 | 3   | 11100100              | -11 | -3  |
| 00100101              | 11  | 1   | 01100101              | 11  | -1  | 10100101              | -11 | 1   | 11100101              | -11 | -1  |
| 00100110              | 9   | 3   | 01100110              | 9   | -3  | 10100110              | -9  | 3   | 11100110              | -9  | -3  |
| 00100111              | 9   | 1   | 01100111              | 9   | -1  | 10100111              | -9  | 1   | 11100111              | -9  | -1  |

|          |    |    |          |    |     |          |     |    |          |     |     |
|----------|----|----|----------|----|-----|----------|-----|----|----------|-----|-----|
| 00101000 | 13 | 5  | 01101000 | 13 | -5  | 10101000 | -13 | 5  | 11101000 | -13 | -5  |
| 00101001 | 13 | 7  | 01101001 | 13 | -7  | 10101001 | -13 | 7  | 11101001 | -13 | -7  |
| 00101010 | 15 | 5  | 01101010 | 15 | -5  | 10101010 | -15 | 5  | 11101010 | -15 | -5  |
| 00101011 | 15 | 7  | 01101011 | 15 | -7  | 10101011 | -15 | 7  | 11101011 | -15 | -7  |
| 00101100 | 13 | 3  | 01101100 | 13 | -3  | 10101100 | -13 | 3  | 11101100 | -13 | -3  |
| 00101101 | 13 | 1  | 01101101 | 13 | -1  | 10101101 | -13 | 1  | 11101101 | -13 | -1  |
| 00101110 | 15 | 3  | 01101110 | 15 | -3  | 10101110 | -15 | 3  | 11101110 | -15 | -3  |
| 00101111 | 15 | 1  | 01101111 | 15 | -1  | 10101111 | -15 | 1  | 11101111 | -15 | -1  |
| 00110000 | 11 | 11 | 01110000 | 11 | -11 | 10110000 | -11 | 11 | 11110000 | -11 | -11 |
| 00110001 | 11 | 9  | 01110001 | 11 | -9  | 10110001 | -11 | 9  | 11110001 | -11 | -9  |
| 00110010 | 9  | 11 | 01110010 | 9  | -11 | 10110010 | -9  | 11 | 11110010 | -9  | -11 |
| 00110011 | 9  | 9  | 01110011 | 9  | -9  | 10110011 | -9  | 9  | 11110011 | -9  | -9  |
| 00110100 | 11 | 13 | 01110100 | 11 | -13 | 10110100 | -11 | 13 | 11110100 | -11 | -13 |
| 00110101 | 11 | 15 | 01110101 | 11 | -15 | 10110101 | -11 | 15 | 11110101 | -11 | -15 |
| 00110110 | 9  | 13 | 01110110 | 9  | -13 | 10110110 | -9  | 13 | 11110110 | -9  | -13 |
| 00110111 | 9  | 15 | 01110111 | 9  | -15 | 10110111 | -9  | 15 | 11110111 | -9  | -15 |
| 00111000 | 13 | 11 | 01111000 | 13 | -11 | 10111000 | -13 | 11 | 11111000 | -13 | -11 |
| 00111001 | 13 | 9  | 01111001 | 13 | -9  | 10111001 | -13 | 9  | 11111001 | -13 | -9  |
| 00111010 | 15 | 11 | 01111010 | 15 | -11 | 10111010 | -15 | 11 | 11111010 | -15 | -11 |
| 00111011 | 15 | 9  | 01111011 | 15 | -9  | 10111011 | -15 | 9  | 11111011 | -15 | -9  |
| 00111100 | 13 | 13 | 01111100 | 13 | -13 | 10111100 | -13 | 13 | 11111100 | -13 | -13 |
| 00111101 | 13 | 15 | 01111101 | 13 | -15 | 10111101 | -13 | 15 | 11111101 | -13 | -15 |
| 00111110 | 15 | 13 | 01111110 | 15 | -13 | 10111110 | -15 | 13 | 11111110 | -15 | -13 |
| 00111111 | 15 | 15 | 01111111 | 15 | -15 | 10111111 | -15 | 15 | 11111111 | -15 | -15 |

### 7.1.6 1024QAM

In case of 1024QAM modulation, 10-tuplets of bits,

$b(i), b(i+1), b(i+2), b(i+3), b(i+4), b(i+5), b(i+6), b(i+7), b(i+8), b(i+9)$ , are mapped to complex-valued modulation symbols  $x$  according to

$$x = \frac{1}{\sqrt{682}} \left\{ (1-2b(i)) \left[ 16 - (1-2b(i+2)) \left[ 8 - (1-2b(i+4)) \left[ 4 - (1-2b(i+6)) \left[ 2 - (1-2b(i+8)) \right] \right] \right] \right] \right. \right. \\ \left. \left. + j(1-2b(i+1)) \left[ 16 - (1-2b(i+3)) \left[ 8 - (1-2b(i+5)) \left[ 4 - (1-2b(i+7)) \left[ 2 - (1-2b(i+9)) \right] \right] \right] \right] \right] \right\}$$

## 7.2 Pseudo-random sequence generation

Pseudo-random sequences are defined by a length-31 Gold sequence. The output sequence  $c(n)$  of length  $M_{\text{PN}}$ , where  $n = 0, 1, \dots, M_{\text{PN}} - 1$ , is defined by


$$\begin{aligned} c(n) &= (x_1(n + N_C) + x_2(n + N_C)) \bmod 2 \\ x_1(n + 31) &= (x_1(n + 3) + x_1(n)) \bmod 2 \\ x_2(n + 31) &= (x_2(n + 3) + x_2(n + 2) + x_2(n + 1) + x_2(n)) \bmod 2 \end{aligned}$$

where  $N_C = 1600$  and the first m-sequence shall be initialized with  $x_1(0) = 1, x_1(n) = 0, n = 1, 2, \dots, 30$ . The initialization of the second m-sequence is denoted by  $c_{\text{init}} = \sum_{i=0}^{30} x_2(i) \cdot 2^i$  with the value depending on the application of the sequence.

## 8 Timing

## 8.1 Uplink-downlink frame timing

Transmission of the uplink radio frame number  $i$  from the UE shall start  $T_{TA} = (N_{TA} + N_{TA,offset} + N_{TA,adj}^{common} + N_{TA,adj}^{UE})T_s$  seconds before the start of the corresponding downlink radio frame at the UE.

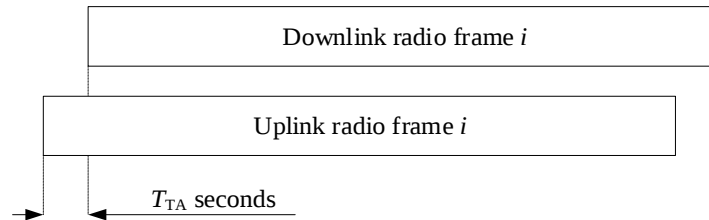

**Figure 8.1-1: Uplink-downlink timing relation**

Except for the cases mentioned in Table 8.1-1, Table 8.1-2 and Table 8.1-3, the range of  $N_{TA}$  is:  $0 \leq N_{TA} \leq 20512$ .

For frame structure type 1  $N_{TA,offset} = 0$  and for frame structure type 2  $N_{TA,offset} = 624$  unless stated otherwise in [4]. Note that not all slots in a radio frame may be transmitted. One example hereof is TDD, where only a subset of the slots in a radio frame is transmitted.

$N_{TA}$  is defined in different ranges depending on the UE configuration according to Table 8.1-1, Table 8.1-2 and Table 8.1-3. In case of subslot based transmission (Table 8.1-2 and Table 8.1-3), the UE is configured by higher layer signalling a processing timeline and an associated range of timing advance.

The quantity  $N_{TA,adj}^{common}$  is derived from the higher-layer parameters  $TACommon$ ,  $TACommonDrift$ , and  $TACommonDriftVariation$  if configured (see Clause 4.2.3 in TS 36.213 [4]), otherwise  $N_{TA,adj}^{common} = 0$ .

The quantity  $N_{TA,adj}^{UE}$  is computed by the UE based on UE position and serving satellite-ephemeris-related higher-layers parameters if configured, otherwise  $N_{TA,adj}^{UE} = 0$ .

**Table 8.1-1: Ranges of  $N_{TA}$  for a UE configured with SCG, short processing time or slot-based transmission in both DL and UL**

| Range of $N_{TA}$         | Condition                                                                                                                           |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| $0 \leq N_{TA} \leq 4096$ | if the UE is configured with a SCG                                                                                                  |
| $0 \leq N_{TA} \leq 6144$ | if the UE is configured with <i>shortProcessingTime</i> (see TS 36.331 [9])                                                         |
| $0 \leq N_{TA} \leq 9520$ | if the UE is configured with <i>dl-STTI-Length</i> and <i>ul-STTI-Length</i> (see TS 36.331 [9]) set to 'slot' for the serving cell |

**Table 8.1-2: Ranges of  $N_{TA}$  for a UE configured with subslot-based transmission in both DL and UL (*dl-STTI-Length* and *ul-STTI-Length*, see TS 36.331 [9]. set to 'subslot')**

| Range of $N_{TA}$          | proc-Timeline |
|----------------------------|---------------|
| $0 \leq N_{TA} \leq 2048$  | nplus4set1    |
| $0 \leq N_{TA} \leq 10816$ | nplus6set1    |
| $0 \leq N_{TA} \leq 5120$  | nplus6set2    |
| $0 \leq N_{TA} \leq 13888$ | nplus8set2    |
| NOTE 1: See TS 36.331 [9]  |               |

**Table 8.1-3: Ranges of  $N_{TA}$  for a UE configured with subslot-based transmission in DL and slot-**

based transmission in UL (*dl-STTI-Length* and *ul-STTI-Length*, see TS 36.331 [9], set to 'subslot' and 'slot', respectively)

| Range of $N_{TA}$         | proc-Timeline |
|---------------------------|---------------|
| $0 \leq N_{TA} \leq 2048$ | nplus4set1    |
| $0 \leq N_{TA} \leq 9520$ | nplus6set1    |
| $0 \leq N_{TA} \leq 5120$ | nplus6set2    |
| $0 \leq N_{TA} \leq 9520$ | nplus8set2    |
| NOTE 1: See TS 36.331 [9] |               |

In all other cases the range of  $N_{TA}$  is:  $0 \leq N_{TA} \leq 20512$  .

## 9 Sidelink

### 9.1 Overview

A sidelink is used for ProSe direct communication and ProSe direct discovery between UEs.

#### 9.1.1 Physical channels

A sidelink physical channel corresponds to a set of resource elements carrying information originating from higher layers and is the interface defined between TS 36.212 [3] and the present document TS 36.211. The following sidelink physical channels are defined:

- Physical Sidelink Shared Channel, PSSCH
- Physical Sidelink Control Channel, PSCCH
- Physical Sidelink Discovery Channel, PSDCH
- Physical Sidelink Broadcast Channel, PSBCH

Generation of the baseband signal representing the different physical sidelink channels is illustrated in Figure 5.3-1.

#### 9.1.2 Physical signals

A sidelink physical signal is used by the physical layer but does not carry information originating from higher layers. The following sidelink physical signals are defined:

- Demodulation reference signal
- Synchronization signal

#### 9.1.3 Handling of simultaneous sidelink and uplink/downlink transmissions

For a given frequency, on an uplink subframe included in *discTxGapConfig* [9], a UE shall not transmit an uplink transmission that is not a PRACH transmission and that is partly or completely overlapping in time with a PSDCH transmission or a SLSS transmission for PSDCH by the same UE. Else, for a given carrier frequency and sidelink transmission mode 1 or 2 or sidelink discovery, a UE shall not transmit a sidelink signal or channel overlapping partly or completely in time with an uplink transmission from the same UE.

For a given carrier frequency, no PSDCH, PSCCH, or PSSCH transmission shall occur from a UE in a sidelink subframe configured for synchronization purposes by the higher-layer parameters

- *syncOffsetIndicator1* or *syncOffsetIndicator2* in [9] if the UE has no serving cell fulfilling the S criterion according to [10, clause 5.2.3.2], or
- *syncOffsetIndicator* in *commSyncConfig* or *discSyncConfig* which includes *txParameters* in [9] if the UE has a serving cell fulfilling the S criterion according to [10, clause 5.2.3.2]. The UE may assume the same configuration in *commSyncConfig* and *discSyncConfig*.

For a given carrier frequency, with the exception of PSSCH transmissions with transmission mode 1 and same sidelink cyclic prefix as PUSCH, no sidelink transmissions shall occur in sidelink subframe  $n$  from a UE if uplink SRS is transmitted from the same UE in uplink subframe  $n$ .

A UE with limited transmission capabilities, on an uplink subframe included in *discTxGapConfig* [9], shall first prioritize a PSDCH transmission or a SLSS transmission for PSDCH over an uplink transmission that is not a PRACH transmission. Else, a UE with limited transmission capabilities shall at a given time first prioritize uplink transmissions, followed by sidelink transmission mode 1 or 2 or sidelink discovery.

A UE with limited transmission capabilities shall at a given time prioritize sidelink communication transmissions (PSSS, SSSS, PSBCH, PSSCH, PSCCH) over sidelink discovery transmissions (PSDCH).

A UE with limited reception capabilities, on a downlink subframe included in *discRxGapConfig* [9], shall first prioritize reception of PSDCH or 11reception of SLSS for PSDCH over downlink reception. Else, a UE with limited reception capabilities shall at a given time first prioritize downlink reception over sidelink reception.

A UE with limited reception capabilities shall at a given time first prioritize sidelink communication reception, sidelink discovery reception on carriers configured by the eNodeB, and last sidelink discovery reception on carriers not configured by the eNodeB.

## 9.2 Slot structure and physical resources

Sidelink transmissions are organized into radio frames with a duration of  $T_f$ , each consisting of 20 slots of duration  $T_{\text{slot}}$ . A sidelink subframe consists of two consecutive slots, starting with an even-numbered slot.

### 9.2.1 Resource grid

A transmitted physical channel or signal in a slot is described by a resource grid of  $N_{\text{RB}}^{\text{SL}} N_{\text{sc}}^{\text{RB}}$  subcarriers and  $N_{\text{symp}}^{\text{SL}}$  SC-FDMA symbols. The sidelink bandwidth  $N_{\text{RB}}^{\text{SL}} = N_{\text{RB}}^{\text{UL}}$  if the S criterion according to [10, clause 5.2.3.2] is fulfilled for a serving cell having the same uplink carrier frequency as the sidelink, otherwise a preconfigured value is used [9].

The sidelink cyclic prefix is configured independently for type 1 discovery, type 2B discovery, sidelink transmission mode 1, sidelink transmission mode 2, control signalling, and PSBCH and synchronization signals. Configuration is per resource pool for discovery, sidelink transmission mode 2, and control signalling. The PSBCH and synchronization signals always use the same cyclic prefix.

Only normal cyclic prefix is supported for PSSCH, PSCCH, PSBCH, and synchronization signals for a sidelink configured with transmission mode 3 or 4.

The resource grid is illustrated in Figure 5.2.1-1.

An antenna port is defined such that the channel over which a symbol on the antenna port is conveyed can be inferred from the channel over which another symbol on the same antenna port is conveyed. There is one resource grid per antenna port. The antenna ports used for transmission of a physical channel or signal are shown in Table 9.2.1-1.

**Table 9.2.1-1: Antenna ports used for different physical channels and signals**

| Physical channel or signal | Antenna port number |
|----------------------------|---------------------|
| PSSCH                      | 1000                |
| PSCCH                      | 1000                |
| PSDCH                      | 1000                |
| PSBCH                      | 1010                |
| Synchronization signals    | 1020                |

### 9.2.2 Resource elements

Each element in the resource grid is called a resource element and is uniquely defined by the index pair  $(k, l)$  in a slot where  $k = 0, \dots, N_{\text{RB}}^{\text{SL}} N_{\text{sc}}^{\text{RB}} - 1$  and  $l = 0, \dots, N_{\text{symp}}^{\text{SL}} - 1$  are the indices in the frequency and time domains, respectively.

Resource element  $(k, l)$  on antenna port  $p$  corresponds to the complex value  $a_{k,l}^{(p)}$ . When there is no risk for confusion, or no particular antenna port is specified, the index  $p$  may be dropped.

Quantities  $a_{k,l}^{(p)}$  corresponding to resource elements not used for transmission of a physical channel or a physical signal in a slot shall be set to zero.

### 9.2.3 Resource blocks

A physical resource block is defined as  $N_{\text{symb}}^{\text{SL}}$  consecutive SC-FDMA symbols in the time domain and  $N_{\text{sc}}^{\text{RB}}$  consecutive subcarriers in the frequency domain, where  $N_{\text{symb}}^{\text{SL}}$  and  $N_{\text{sc}}^{\text{RB}}$  are given by Table 9.2.3-1. A physical resource block in the sidelink thus consists of  $N_{\text{symb}}^{\text{SL}} \times N_{\text{sc}}^{\text{RB}}$  resource elements, corresponding to one slot in the time domain and 180 kHz in the frequency domain.

**Table 9.2.3-1: Resource block parameters**

| Configuration          | $N_{\text{sc}}^{\text{RB}}$ | $N_{\text{symb}}^{\text{SL}}$ |
|------------------------|-----------------------------|-------------------------------|
| Normal cyclic prefix   | 12                          | 7                             |
| Extended cyclic prefix | 12                          | 6                             |

The relation between the physical resource block number  $n_{\text{PRB}}$  in the frequency domain and resource elements  $(k, l)$  in a slot is given by

$$n_{\text{PRB}} = \left\lfloor \frac{k}{N_{\text{sc}}^{\text{RB}}} \right\rfloor$$

### 9.2.4 Resource pool

The subframe pools and resource block pools are defined in [4].

For PSSCH, the number of the current slot in the subframe pool  $n_{\text{ss}}^{\text{PSSCH}} = 2n_{\text{ssf}}^{\text{PSSCH}} + i$ , where  $i \in \{0,1\}$  is the number of the current slot within the current sidelink subframe  $n_{\text{ssf}}^{\text{PSSCH}} = j \bmod 10$  with  $j$  equal to the subscript of  $l_j^{\text{PSSCH}}$ , defined in clauses 14.1.4 and 14.2.3 of [4] for sidelink transmission modes 1 and 2, respectively; and where  $i \in \{0,1\}$  is the number of the current slot within the current sidelink subframe  $n_{\text{ssf}}^{\text{PSSCH}} = k \bmod 10$  with  $k$  equal to the subscript of  $t_k^{\text{SL}}$ , defined in clauses 14.1.1.5 of [4] for sidelink transmission modes 3 and 4.

### 9.2.5 Guard period

The last SC-FDMA symbol in a sidelink subframe serves as a guard period and shall not be used for sidelink transmission.

## 9.3 Physical Sidelink Shared Channel

### 9.3.1 Scrambling

The block of bits  $b(0), \dots, b(M_{\text{bit}} - 1)$ , where  $M_{\text{bit}}$  is the number of bits transmitted on the physical sidelink shared channel in one subframe shall be scrambled according to clause 5.3.1.

The scrambling sequence generator shall be initialised with  $c_{\text{init}} = n_{\text{ID}}^{\text{X}} \cdot 2^{14} + n_{\text{ssf}}^{\text{PSSCH}} \cdot 2^9 + 510$  at the start of every PSSCH subframe where

- for sidelink transmission modes 1 and 2,  $n_{\text{ID}}^{\text{X}} = n_{\text{ID}}^{\text{SA}}$  is destination identity obtained from the sidelink control channel, and
- for sidelink transmission modes 3 and 4,  $n_{\text{ID}}^{\text{X}} = \sum_{i=0}^{L-1} p_i \cdot 2^{L-1-i}$  with  $p$  and  $L$  given by clause 5.1.1 in [3] equals the decimal representation of CRC on the PSSCH transmitted in the same subframe as the PSSCH.

### 9.3.2 Modulation

Modulation shall be done according to clause 5.3.2. Table 9.3.2-1 specifies the modulation mappings applicable for the physical sidelink shared channel.

**Table 9.3.2-1: PSSCH modulation schemes**

| Physical channel | Modulation schemes |
|------------------|--------------------|
| PSSCH            | QPSK, 16QAM, 64QAM |

### 9.3.3 Layer mapping

Layer mapping shall be done according to clause 5.3.2A assuming a single antenna port,  $v=1$ .

### 9.3.4 Transform precoding

Transform precoding shall be done according to clause 5.3.3 with  $M_{RB}^{PUSCH}$  and  $M_{sc}^{PUSCH}$  replaced by  $M_{RB}^{PSSCH}$  and  $M_{sc}^{PSSCH}$ , respectively.

### 9.3.5 Precoding

Precoding shall be done according to clause 5.3.3A assuming a single antenna port,  $v=1$ .

### 9.3.6 Mapping to physical resources

The block of complex-valued symbols  $z(0), \dots, z(M_{\text{symb}}^{\text{ap}} - 1)$  shall be multiplied with the amplitude scaling factor  $\beta_{\text{PSSCH}}$  in order to conform to the transmit power  $P_{\text{PSSCH}}$  specified in [4], and mapped in sequence starting with  $z(0)$  to physical resource blocks on antenna port  $p$  and assigned for transmission of PSSCH. The mapping to resource elements  $(k, l)$  corresponding to the physical resource blocks assigned for transmission and not used for transmission of reference signals shall be in increasing order of first the index  $k$ , then the index  $l$ , starting with the first slot in the subframe. If Transmission Format of SCI format 1 is set to 1, the resource elements in the last SC-FDMA symbol within a subframe shall not be considered in the mapping process. Otherwise, the resource elements in the last SC-FDMA symbol within a subframe shall be counted in the mapping process but not transmitted.

If sidelink frequency hopping is disabled the set of physical resource blocks to be used for transmission is given by  $n_{\text{PRB}} = n'_{\text{VRB}}$  where  $n'_{\text{VRB}}$  is obtained from [4, clause 14.1.1.2.1].

If sidelink frequency hopping with type 1 hopping is enabled, the set of physical resource blocks to be used for transmission is given by [4].

If sidelink frequency hopping with predefined hopping pattern is enabled, the set of physical resource blocks to be used for transmission is given by the sidelink control information together with a predefined pattern in clause 5.3.4 with the following exceptions:

- only inter-subframe hopping shall be used
- the number of subbands  $N_{\text{sb}} \in \{1, 2, 4\}$  is given by higher layers as described in [4, clause 14.1.1.2]
- the quantity  $N_{\text{RB}}^{\text{HO}} \in \{0, \dots, 110\}$  is given by higher layers as described in [4, clause 14.1.1.2]
- the quantity  $n_s = n_{\text{ss}}^{\text{PSSCH}}$  where  $n_{\text{ss}}^{\text{PSSCH}}$  is given by clause 9.2.4
- the quantity  $\text{CURRENT\_TX\_NB} = n_{\text{ssf}}^{\text{PSSCH}}$
- the pseudo-random sequence generator is initialized at the start of each slot fulfilling  $n_{\text{ss}}^{\text{PSSCH}} = 0$  with the initialization value  $c_{\text{init}} \in \{0, 1, \dots, 503, 510\}$  given by *hoppingParameter-r12* in [9]

- the quantity  $n_{\text{VRB}}$  shall be replaced by  $n'_{\text{VRB}}$ , given by [4, clause 14.1.1.2.1]
- for sidelink transmission mode 1
  - $N_{\text{RB}}^{\text{UL}} = N_{\text{RB}}^{\text{SL}}$
- for sidelink transmission mode 2
  - $N_{\text{RB}}^{\text{UL}} = M_{\text{RB}}^{\text{PSSCH\_RP}}$  where  $M_{\text{RB}}^{\text{PSSCH\_RP}}$  is given by [4, clause 14.1.3]
  - the quantity  $n_{\text{PRB}}$  shall be replaced by  $n'_{\text{PRB}}$ , given by [4, clause 14.1.1.4]
  - the physical resource block to use for transmission  $n_{\text{PRB}} = m_{n_{\text{PRB}}}^{\text{PSSCH}}$  with  $m_j^{\text{PSSCH}}$  given by [4, clause 14.1.3]

## 9.4 Physical Sidelink Control Channel

### 9.4.1 Scrambling

The block of bits  $b(0), \dots, b(M_{\text{bit}} - 1)$ , where  $M_{\text{bit}}$  is the number of bits transmitted on the physical sidelink control channel in one subframe shall be scrambled according to clause 5.3.1.

The scrambling sequence generator shall be initialised with  $c_{\text{init}} = 510$  at the start of every PSCCH subframe.

### 9.4.2 Modulation

Modulation shall be done according to clause 5.3.2. Table 9.4.2-1 specifies the modulation mappings applicable for the physical sidelink control channel.

**Table 9.4.2-1: PSCCH modulation schemes**

| Physical channel | Modulation schemes |
|------------------|--------------------|
| PSCCH            | QPSK               |

### 9.4.3 Layer mapping

Layer mapping shall be done according to clause 5.3.2A assuming a single antenna port,  $\nu = 1$ .

### 9.4.4 Transform precoding

Transform precoding shall be done according to clause 5.3.3 with  $M_{\text{RB}}^{\text{PUSCH}}$  and  $M_{\text{sc}}^{\text{PUSCH}}$  replaced by  $M_{\text{RB}}^{\text{PSCCH}}$  and  $M_{\text{sc}}^{\text{PSCCH}}$ , respectively.

### 9.4.5 Precoding

Precoding shall be done according to clause 5.3.3A assuming a single antenna port,  $\nu = 1$ .

### 9.4.6 Mapping to physical resources

The block of complex-valued symbols  $z(0), \dots, z(M_{\text{symb}}^{\text{ap}} - 1)$  shall be multiplied with the amplitude scaling factor  $\beta_{\text{PSCCH}}$  in order to conform to the transmit power  $P_{\text{PSCCH}}$  specified in [4], and mapped in sequence starting with  $z(0)$  to physical resource blocks on antenna port  $p$  and assigned for transmission of PSCCH. The mapping to resource elements  $(k, l)$  corresponding to the physical resource blocks assigned for transmission and not used for transmission of

reference signals shall be in increasing order of first the index  $k$ , then the index  $l$ , starting with the first slot in the subframe. Resource elements in the last SC-FDMA symbol within a subframe shall be counted in the mapping process but not transmitted.

## 9.5 Physical Sidelink Discovery Channel

### 9.5.1 Scrambling

The block of bits  $b(0), \dots, b(M_{\text{bit}} - 1)$ , where  $M_{\text{bit}}$  is the number of bits transmitted on the physical sidelink discovery channel in one subframe shall be scrambled according to clause 5.3.1.

The scrambling sequence generator shall be initialised with  $c_{\text{init}} = 510$  at the start of each PSDCH subframe.

### 9.5.2 Modulation

Modulation shall be done according to clause 5.3.2. Table 9.5.2-1 specifies the modulation mappings applicable for the physical sidelink discovery channel.

**Table 9.5.2-1: Sidelink modulation schemes**

| Physical channel | Modulation schemes |
|------------------|--------------------|
| PSDCH            | QPSK               |

### 9.5.3 Layer mapping

Layer mapping shall be done according to clause 5.3.2A assuming a single antenna port,  $v=1$ .

### 9.5.4 Transform precoding

Transform precoding shall be done according to clause 5.3.3 with  $M_{\text{RB}}^{\text{PUSCH}}$  and  $M_{\text{sc}}^{\text{PUSCH}}$  replaced by  $M_{\text{RB}}^{\text{PSDCH}}$  and  $M_{\text{sc}}^{\text{PSDCH}}$ , respectively.

### 9.5.5 Precoding

Precoding shall be done according to clause 5.3.3A assuming a single antenna port,  $v=1$ .

### 9.5.6 Mapping to physical resources

The block of complex-valued symbols  $z(0), \dots, z(M_{\text{symb}}^{\text{ap}} - 1)$  shall be multiplied with the amplitude scaling factor  $\beta_{\text{PSDCH}}$  in order to conform to the transmit power  $P_{\text{PSDCH}}$  specified in [4], and mapped in sequence starting with  $z(0)$  to physical resource blocks on antenna port  $p$  and assigned for transmission of PSDCH. The mapping to resource elements  $(k, l)$  corresponding to the physical resource blocks assigned for transmission and not used for transmission of reference signals shall be in increasing order of first the index  $k$ , then the index  $l$ , starting with the first slot in the subframe. Resource elements in the last SC-FDMA symbol within a subframe shall be counted in the mapping process but not transmitted.

The set of physical resource blocks that shall be used are given by [4, clause 14.3.1].

## 9.6 Physical Sidelink Broadcast Channel

### 9.6.1 Scrambling

The block of bits  $b(0), \dots, b(M_{\text{bit}} - 1)$ , where  $M_{\text{bit}}$  is the number of bits transmitted on the physical sidelink broadcast channel in one subframe, shall be scrambled according to clause 5.3.1. The scrambling sequence generator shall be initialised at the start of every PSBCH subframe with  $c_{\text{init}} = N_{\text{ID}}^{\text{SL}}$ .

### 9.6.2 Modulation

Modulation shall be done according to clause 5.3.2. Table 9.6.2-1 specifies the modulation mappings applicable for the physical sidelink broadcast channel.

**Table 9.6.2-1: PSBCH modulation schemes**

| Physical channel | Modulation schemes |
|------------------|--------------------|
| PSBCH            | QPSK               |

### 9.6.3 Layer mapping

Layer mapping shall be done according to clause 5.3.2A assuming a single antenna port,  $v=1$ .

### 9.6.4 Transform precoding

Transform precoding shall be done according to clause 5.3.3 with  $M_{\text{RB}}^{\text{PUSCH}}$  and  $M_{\text{sc}}^{\text{PUSCH}}$  replaced by  $M_{\text{RB}}^{\text{PSBCH}}$  and  $M_{\text{sc}}^{\text{PSBCH}}$ , respectively.

### 9.6.5 Precoding

Precoding shall be done according to clause 5.3.3A assuming a single antenna port,  $v=1$ .

### 9.6.6 Mapping to physical resources

The block of complex-valued symbols  $z(0), \dots, z(M_{\text{symb}}^{\text{ap}} - 1)$  shall be multiplied with the amplitude scaling factor  $\beta_{\text{PSBCH}}$  in order to conform to the transmit power  $P_{\text{PSBCH}}$  specified in [4], and mapped in sequence starting with  $z(0)$  to physical resource blocks on antenna port  $p$ . The PSBCH shall use the same set of resource blocks as the synchronization signal. The mapping to resource elements  $(k, l)$  corresponding to the physical resource blocks used for the PSBCH and not used for transmission of reference signals or synchronization signals shall be in increasing order of first the index  $k$ , then the index  $l$ , starting with the first slot in the subframe. The resource-element index  $k$  given by

$$k = k' - 36 + \frac{N_{\text{RB}}^{\text{SL}} N_{\text{sc}}^{\text{RB}}}{2}, \quad k' = 0, 1, \dots, 71$$

Resource elements in the last SC-FDMA symbol within a subframe should be counted in the mapping process but not transmitted.

## 9.7 Sidelink Synchronization Signals

A physical-layer sidelink synchronization identity is represented by  $N_{\text{ID}}^{\text{SL}} \in \{0, 1, \dots, 335\}$ , divided into two sets  $\text{id\_net}$  and  $\text{id\_oon}$  consisting of identities  $\{0, 1, \dots, 167\}$  and  $\{168, 169, \dots, 335\}$ , respectively.

### 9.7.1 Primary sidelink synchronization signal

The primary sidelink synchronization signal is transmitted in two adjacent SC-FDMA symbols in the same subframe.

#### 9.7.1.1 Sequence generation

Each of the two sequences  $d_i(0), \dots, d_i(61), i=1,2$  used for the primary sidelink synchronization signal in the two SC-FDMA symbols is given by clause 6.11.1.1 with root index  $u=26$  if  $N_{\text{ID}}^{\text{SL}} \leq 167$  and  $u=37$  otherwise.

#### 9.7.1.2 Mapping to resource elements

The sequence  $d_i(n)$  shall be multiplied with the amplitude scaling factor  $\sqrt{72/62} \cdot \beta_{\text{PSBCH}}$  and mapped to resource elements on antenna port 1020 in the first slot in the subframe according to

$$a_{k,l} = d_i(n), \quad n = 0, \dots, 61$$

$$k = n - 31 + \frac{N_{\text{RB}}^{\text{SL}} N_{\text{sc}}^{\text{RB}}}{2}$$

$$l = \begin{cases} 1, 2 & \text{normal cyclic prefix} \\ 0, 1 & \text{extended cyclic prefix} \end{cases}$$

### 9.7.2 Secondary sidelink synchronization signal

The secondary sidelink synchronization signal is transmitted in two adjacent SC-FDMA symbols in the same subframe.

#### 9.7.2.1 Sequence generation

Each of the two sequences  $d_i(0), \dots, d_i(61), i=1,2$  used for the secondary sidelink synchronization signal is given by clause 6.11.2.1 assuming

- subframe 0 with  $N_{\text{ID}}^{(1)} = N_{\text{ID}}^{\text{SL}} \bmod 168$  and  $N_{\text{ID}}^{(2)} = \lfloor N_{\text{ID}}^{\text{SL}} / 168 \rfloor$  for transmission modes 1 and 2, and
- subframe 5 for transmission modes 3 and 4.

#### 9.7.2.2 Mapping to resource elements

The sequence  $d_i(n)$  shall be multiplied with the amplitude scaling factor  $\beta_{\text{SSSS}}$  in order to conform to the transmit power specified in clause 14.4 in TS 36.213 [4] and mapped to resource elements on antenna port 1020 in the second slot in the subframe according to

$$a_{k,l} = d_i(n), \quad n = 0, \dots, 61$$

$$k = n - 31 + \frac{N_{\text{RB}}^{\text{SL}} N_{\text{sc}}^{\text{RB}}}{2}$$

$$l = \begin{cases} 4, 5 & \text{normal cyclic prefix} \\ 3, 4 & \text{extended cyclic prefix} \end{cases}$$

## 9.8 Demodulation reference signals

Demodulation reference signals associated with PSSCH, PSCCH, PSDCH, and PSBCH transmission shall be transmitted according to PUSCH in clause 5.5.2.1 with the following exceptions:

- The parameters in Tables 9.8-1, 9.8-2, and 9.8-3 shall be used.
- The term PUSCH shall be replaced by PSSCH, PSCCH, PSDCH or PSBCH, depending on the physical channel to which the reference signal is associated.

- Antenna ports are given by Table 9.2-1.
- The set of physical resource blocks used in the mapping process shall be identical to the corresponding PSSCH/PSCCH/PSDCH/PSBCH transmission.
- The index  $k$  in the mapping process in clause 5.5.2.1.2 corresponding to the case where higher-layer parameter *ul-DMRS-IFDMA* is not set shall be identical to that for the corresponding PSSCH/PSCCH/PSDCH/PSBCH transmission.
- For sidelink transmission modes 3 and 4 on the PSSCH and PSCCH, the mapping shall use  $l=2$  and  $l=5$  for the first slot in the subframe and  $l=1$  and  $l=4$  for the second slot in the subframe.
- For sidelink transmission modes 3 and 4 on the PSBCH, the mapping shall use  $l=4$  and  $l=6$  for the first slot in the subframe and  $l=2$  for the second slot in the subframe.
- For sidelink transmission modes 1 and 2, the pseudo-random sequence generator in clause 5.5.1.3 shall be initialized at the start of each slot fulfilling  $n_{ss}^{PSSCH} = 0$ . For sidelink transmission modes 3 and 4 the pseudo-random sequence generator in clause 5.5.1.3 shall be initialized at the start of each slot fulfilling  $n_{ss}^{PSSCH} \bmod 2 = 0$ .
- For sidelink transmission modes 3 and 4 on the PSCCH, the cyclic shift  $n_{cs,\lambda}$  to be applied for all DM-RS in a subframe shall be chosen according to clause 14.2.1 of [4].
- For sidelink transmission modes 1 and 2 and sidelink discovery, the quantity  $m$  in clause 5.5.2.1.1 takes the values  $m=0,1$  and for sidelink transmission modes 3 and 4, the quantity  $m$  in clause 5.5.2.1.1 takes the values  $m=0,1,2,3$  for PSSCH and  $m=0,1,2$  for PSBCH.
- For sidelink transmission modes 3 and 4, the quantity  $n_{ID}^X$  equals the decimal representation of CRC on the PSCCH transmitted in the same subframe as the PSSCH according to  $n_{ID}^X = \sum_{i=0}^{L-1} p_i \cdot 2^{L-1-i}$  with  $p$  and  $L$  given by clause 5.1.1 in [3].

**Table 9.8-1: Reference signal parameters for PSSCH.**

| Parameter in clause 5.5.2.1 |                      | Sidelink transmission modes 1 and 2                                                                                                                                | PSSCH<br>Sidelink transmission modes 3 and 4                                                                                                                                                         |
|-----------------------------|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Group hopping               |                      | enabled                                                                                                                                                            | enabled                                                                                                                                                                                              |
|                             | $n_{ID}^{RS}$        | $n_{ID}^{SA}$                                                                                                                                                      | $n_{ID}^X$                                                                                                                                                                                           |
|                             | $n_s$                | $n_{ss}^{PSSCH}$                                                                                                                                                   | $2n_{ss}^{PSSCH}$ first DM-RS symbol in a slot<br>$2n_{ss}^{PSSCH} + 1$ second DM-RS symbol in a slot                                                                                                |
|                             | $f_{ss}$             | $n_{ID}^{SA} \bmod 30$                                                                                                                                             | $\lfloor n_{ID}^X / 16 \rfloor \bmod 30$                                                                                                                                                             |
| Sequence hopping            |                      | disabled                                                                                                                                                           | disabled                                                                                                                                                                                             |
| Cyclic shift                | $n_{cs,\lambda}$     | $\lfloor n_{ID}^{SA} / 2 \rfloor \bmod 8$                                                                                                                          | $\lfloor n_{ID}^X / 2 \rfloor \bmod 8$                                                                                                                                                               |
| Orthogonal sequence         | $w^{\lambda}(\cdot)$ | $\begin{bmatrix} +1 & +1 \\ +1 & -1 \end{bmatrix}$ if $n_{ID}^{SA} \bmod 2 = 0$<br>$\begin{bmatrix} +1 & +1 \\ +1 & -1 \end{bmatrix}$ if $n_{ID}^{SA} \bmod 2 = 1$ | $\begin{bmatrix} +1 & +1 & +1 & +1 \\ +1 & -1 & +1 & -1 \end{bmatrix}$ if $n_{ID}^X \bmod 2 = 0$<br>$\begin{bmatrix} +1 & +1 & +1 & +1 \\ +1 & -1 & +1 & -1 \end{bmatrix}$ if $n_{ID}^X \bmod 2 = 1$ |
| Reference signal length     | $M_{sc}^{RS}$        | $M_{sc}^{PSSCH}$                                                                                                                                                   | $M_{sc}^{PSSCH}$                                                                                                                                                                                     |
| Number of layers            | $\nu$                | 1                                                                                                                                                                  | 1                                                                                                                                                                                                    |
| Number of antenna ports     | $P$                  | 1                                                                                                                                                                  | 1                                                                                                                                                                                                    |

**Table 9.8-2: Reference signal parameters for PSCCH.**

| Parameter in clause 5.5.2.1 | PSCCH |
|-----------------------------|-------|
|-----------------------------|-------|

|                         |                      | Sidelink transmission modes 1 and 2 | Sidelink transmission modes 3 and 4 |
|-------------------------|----------------------|-------------------------------------|-------------------------------------|
| Group hopping           |                      | disabled                            | disabled                            |
|                         | $n_{ID}^{RS}$        | -                                   | -                                   |
|                         | $n_s$                | -                                   | -                                   |
|                         | $f_{ss}$             | 0                                   | 8                                   |
| Sequence hopping        |                      | disabled                            | disabled                            |
| Cyclic shift            | $n_{cs,\lambda}$     | 0                                   | {0, 3, 6, 9}                        |
| Orthogonal sequence     | $[w^\lambda(\cdot)]$ | $[+1 \ +1]$                         | $[+1 \ +1 \ +1 \ +1]$               |
| Reference signal length | $M_{sc}^{RS}$        | $M_{sc}^{PSCCH}$                    | $M_{sc}^{PSCCH}$                    |
| Number of layers        | $\nu$                | 1                                   | 1                                   |
| Number of antenna ports | $P$                  | 1                                   | 1                                   |

Table 9.8-3: Reference signal parameters for PSDCH and PSBCH.

| Parameter in clause 5.5.2.1 | PSDCH            | PSBCH                                                                                |                                                                                                |
|-----------------------------|------------------|--------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
|                             |                  | Sidelink transmission modes 1 and 2                                                  | Sidelink transmission modes 3 and 4                                                            |
| Group hopping               | disabled         | disabled                                                                             | disabled                                                                                       |
| $f_{ss}$                    | 0                | $\lfloor N_{ID}^{SL}/16 \rfloor \bmod 30$                                            | $\lfloor N_{ID}^{SL}/16 \rfloor \bmod 30$                                                      |
| Sequence hopping            | disabled         | disabled                                                                             | disabled                                                                                       |
| Cyclic shift                | 0                | $\lfloor N_{ID}^{SL}/2 \rfloor \bmod 8$                                              | $\lfloor N_{ID}^{SL}/2 \rfloor \bmod 8$                                                        |
| (Orthogonal) sequence       | $[+1 \ +1]$      | $[+1 \ +1]$ if $N_{ID}^{SL} \bmod 2 = 0$<br>$[+1 \ -1]$ if $N_{ID}^{SL} \bmod 2 = 1$ | $[+1 \ +1 \ +1]$ if $N_{ID}^{SL} \bmod 2 = 0$<br>$[+1 \ -1 \ +1]$ if $N_{ID}^{SL} \bmod 2 = 1$ |
| Reference signal length     | $M_{sc}^{PSDCH}$ | $M_{sc}^{PSBCH}$                                                                     | $M_{sc}^{PSBCH}$                                                                               |
| Number of layers            | 1                | 1                                                                                    | 1                                                                                              |
| Number of antenna ports     | 1                | 1                                                                                    | 1                                                                                              |

## 9.9 SC-FDMA baseband signal generation

The time-continuous signal  $s_l^{(p)}(t)$  for antenna port  $p$  in SC-FDMA symbol  $l$  in a sidelink slot is defined by clause 5.6 with  $N_{RB}^{UL}$  replaced by  $N_{RB}^{SL}$ .

The cyclic prefix length for each sidelink channel or signal may differ from that configured for uplink transmissions.

## 9.10 Timing

Transmission of a sidelink radio frame number  $i$  from the UE shall start  $(N_{TA, SL} + N_{TA, offset}) \cdot T_s$  seconds before the start of the corresponding timing reference frame at the UE. The UE is not required to receive sidelink or downlink transmissions earlier than  $624 T_s$  after the end of a sidelink transmission.

For PSDCH transmission and sidelink synchronization signal transmission for PSDCH:

if the UE has a serving cell fulfilling the S criterion according to [10, clause 5.2.3.2]

- the timing of reference radio frame  $i$  equals that of downlink radio frame  $i$  of the cell  $c$  as given in Clause 14.3.1 of [4] and
- $N_{TA, offset}$  is given by clause 8.1,

otherwise

- the timing of reference radio frame  $i$  is implicitly obtained from [4] and
- $N_{TA \text{ offset}} = 0$ .


For all other sidelink transmissions:

if the UE has a serving cell fulfilling the S criterion according to [10, clause 5.2.3.2]

- the timing of reference radio frame  $i$  equals that of downlink radio frame  $i$  in the cell with the same uplink carrier frequency as the sidelink and
- $N_{TA \text{ offset}}$  is given by clause 8.1,

otherwise

- the timing of reference radio frame  $i$  is implicitly obtained from [4] and
- $N_{TA \text{ offset}} = 0$ .

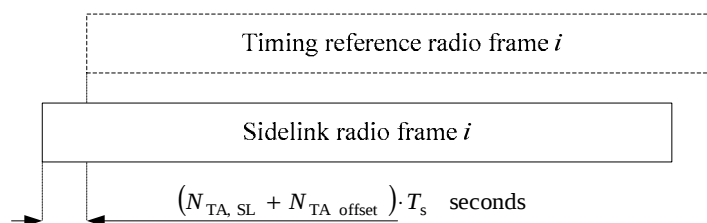

**Figure 9.9-1: Sidelink timing relation.**

The quantity  $N_{TA, SL}$  differs between channels and signals according to

$$N_{TA, SL} = \begin{cases} N_{TA} & \text{for PSSCH in sidelink transmission mode 1} \\ 0 & \text{for all other cases} \end{cases}$$

## 10 Narrowband IoT

### 10.0 General

#### 10.0.1 Frame structure

##### 10.0.1.1 Frame structure type 1

Frame structure type 1 is applicable to FDD and IoT NTN TDD operation only.

##### 10.0.1.2 Frame structure type 2

Frame structure type 2 is applicable to TDD operation only.

The following restrictions apply:

- Uplink-downlink configuration 0 and 6 are not supported.
- UpPTS is not used for NPUSCH or NPRACH.
- DwPTS and UpPTS in special subframe configuration 10 is not used for transmissions.

- On an NB-IoT carrier for which higher-layer parameter *operationModeInfo* indicates *inband-SamePCI* or *inband-DifferentPCI*, or higher-layer parameter *inbandCarrierInfo* is present, or on an NB-IoT carrier for *SystemInformationBlockType1-NB* for which *sib1-carrierInfo* indicates *non-anchor* and the value of the higher layer parameter *sib-GuardbandInfo* is set to *sib-GuardbandInbandSamePCI* or *sib-GuardbandinbandDiffPCI*, DwPTS in special subframe configuration 0 and 5 for normal cyclic prefix is not used for NPDCCH and NPDSCH transmission, in addition when *npdsch-16QAM-Config-r17* is configured DwPTS in special subframe configuration 9 for normal cyclic prefix is not used for NPDSCH transmission with 16QAM.
- Higher-layer parameter *symbolBitmap* does not apply to special subframes.

## 10.1 Uplink

### 10.1.1 Overview

#### 10.1.1.1 Physical channels

The following narrowband physical channels are defined:

- Narrowband Physical Uplink Shared Channel, NPUSCH
- Narrowband Physical Random-Access Channel, NPRACH

#### 10.1.1.2 Physical signals


The following uplink narrowband physical signals are defined:

- Narrowband demodulation reference signal

### 10.1.2 Slot structure and physical resources

#### 10.1.2.1 Resource grid

A transmitted physical channel or signal in a slot is described by one or several resource grids of  $N_{sc}^{UL}$  subcarriers and  $N_{symb}^{UL}$  SC-FDMA symbols. The resource grid is illustrated in Figure 10.1.2.1-1. The slot number within a radio frame is denoted  $n_s$  where  $n_s \in \{0,1,...,19\}$  for  $\Delta f = 15$  kHz and  $n_s \in \{0,1,...,4\}$  for  $\Delta f = 3.75$  kHz .

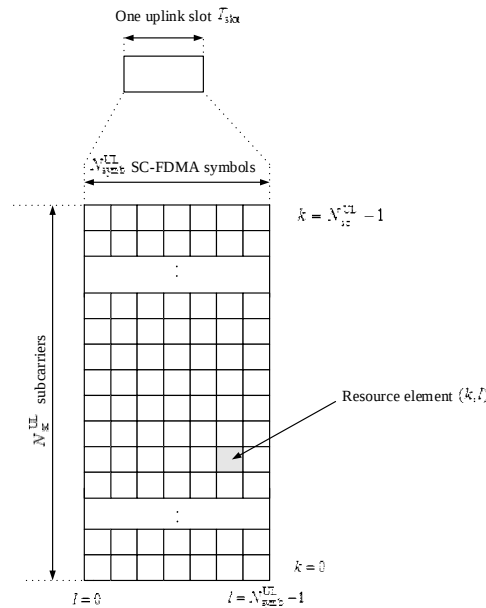

**Figure 10.1.2.1-1: Uplink resource grid for NB-IoT**

The uplink bandwidth in terms of subcarriers  $N_{sc}^{UL}$ , and the slot duration  $T_{slot}$  are given in Table 10.1.2.1-1.

**Table 10.1.2.1-1: NB-IoT parameters.**

| Subcarrier spacing    | $N_{sc}^{UL}$ | $T_{slot}$  |
|-----------------------|---------------|-------------|
| $\Delta f = 3.75$ kHz | 48            | $61440 T_s$ |
| $\Delta f = 15$ kHz   | 12            | $15360 T_s$ |

A single antenna port  $p = 0$  is used for all uplink transmissions.

### 10.1.2.2 Resource elements

Each element in the resource grid is called a resource element and is uniquely defined by the index pair  $(k, l)$  in a slot where  $k = 0, \dots, N_{sc}^{UL} - 1$  and  $l = 0, \dots, N_{symb}^{UL} - 1$  are the indices in the frequency and time domains, respectively.

Resource element  $(k, l)$  corresponds to the complex value  $a_{k,l}$ . Quantities  $a_{k,l}$  corresponding to resource elements not used for transmission of a physical channel or a physical signal in a slot shall be set to zero.

### 10.1.2.3 Resource unit

Resource units are used to describe the mapping of the NPUSCH to resource elements. A resource unit is defined as  $N_{symb}^{UL} N_{slots}^{UL}$  SC-FDMA symbols in the time domain and  $N_{sc}^{RU}$  consecutive subcarriers in the frequency domain, where  $N_{sc}^{RU}$  and  $N_{symb}^{UL}$  are given by Tables 10.1.2.3-1 and 10.1.2.3-2 for frame structure types 1 and 2, respectively.

**Table 10.1.2.3-1: Supported combinations of  $N_{sc}^{RU}$ ,  $N_{slots}^{UL}$ , and  $N_{symb}^{UL}$  for frame structure type 1.**

| NPUSCH format | $\Delta f$ | $N_{sc}^{RU}$ | $N_{slots}^{UL}$ | $N_{symb}^{UL}$ |
|---------------|------------|---------------|------------------|-----------------|
| 1             | 3.75 kHz   | 1             | 16               | 7               |
|               | 15 kHz     | 1             | 16               |                 |

|   |          |    |   |
|---|----------|----|---|
| 2 | 3.75 kHz | 3  | 8 |
|   |          | 6  | 4 |
|   |          | 12 | 2 |
|   |          | 1  | 4 |
|   |          | 1  | 4 |

**Table 10.1.2.3-2: Supported combinations of  $N_{sc}^{RU}$ ,  $N_{slots}^{UL}$ , and  $N_{symb}^{UL}$  for frame structure type 2.**

| NPUSCH format | $\Delta f$ | Supported uplink-downlink configurations | $N_{sc}^{RU}$ | $N_{slots}^{UL}$ | $N_{symb}^{UL}$ |
|---------------|------------|------------------------------------------|---------------|------------------|-----------------|
| 1             | 3.75 kHz   | 1, 4                                     | 1             | 16               | 7               |
|               | 15 kHz     | 1, 2, 3, 4, 5                            | 1             | 16               |                 |
|               |            |                                          | 3             | 8                |                 |
|               |            |                                          | 6             | 4                |                 |
|               |            |                                          | 12            | 2                |                 |
| 2             | 3.75 kHz   | 1, 4                                     | 1             | 4                |                 |
|               | 15 kHz     | 1, 2, 3, 4, 5                            | 1             | 4                |                 |

### 10.1.3 Narrowband physical uplink shared channel

The narrowband physical uplink shared channel supports two formats:

- NPUSCH format 1, used to carry the UL-SCH
- NPUSCH format 2, used to carry uplink control information

#### 10.1.3.1 Scrambling

Scrambling shall be done according to clause 5.3.1.

For a UE communicating over NTN in FDD operation and if the higher layer parameter *npusch-OCC-Enabled* is configured, OCC is indicated as enabled in DCI Format N0 as described in [3], and  $M_{rep}^{NPUSCH} \geq 2$ , the scrambling sequence shall be reinitialized with

$$c_{init} = n_{RNTI} \cdot 2^{14} + (n_f \bmod 2) \cdot 2^{13} + \lfloor n_s/2 \rfloor \cdot 2^9 + N_{ID}^{Ncell}$$

after every  $M_{identical}^{NPUSCH} N_{identical}^{NPUSCH}$  transmissions of the codeword with  $n_s$  and  $n_f$  set to the first slot and the frame, respectively, used for the transmission of the repetition. The quantity  $N_{identical}^{NPUSCH}$  is given by clause 10.1.3.6.

Otherwise, the scrambling sequence generator shall be initialised with

$$c_{init} = n_{RNTI} \cdot 2^{14} + (n_f \bmod 2) \cdot 2^{13} + \lfloor n_s/2 \rfloor \cdot 2^9 + N_{ID}^{Ncell}$$

where  $n_s$  is the first slot of the transmission of the codeword. In case of NPUSCH repetitions, the scrambling sequence shall be reinitialised according to the above formula after every  $M_{identical}^{NPUSCH}$  transmissions of the codeword with  $n_s$  and  $n_f$  set to the first slot and the frame, respectively, used for the transmission of the repetition. The quantity  $M_{identical}^{NPUSCH}$  is given by clause 10.1.3.6.

#### 10.1.3.2 Modulation

Modulation shall be done according to clause 5.3.2 resulting in a block of modulated symbols

$d^{(q)}(0), \dots, d^{(q)}(M_{symb}^{(q)} - 1)$ . Table 10.1.3.2-1 specifies the modulation mappings applicable for the narrowband physical uplink shared channel.

The block of modulated symbols shall be multiplied with a code  $c_{SR}$  resulting in a block of modulation symbols

$\bar{d}^{(q)}(0), \dots, \bar{d}^{(q)}(M_{symb}^{(q)} - 1)$  according to

$$\bar{d}^{(q)}(i) = c_{SR}(i) d^{(q)}(i)$$

where

- $c_{\text{SR}}(i) = (-1)^i, i = 0, 1, \dots, 15$  in case a positive scheduling request according to [4] is to be transmitted using NPUSCH format 2
- $c_{\text{SR}}(i) = 1$  otherwise

**Table 10.1.3.2-1: NPUSCH modulation schemes**

| NPUSCH format | $N_{\text{sc}}^{\text{RU}}$ | Modulation scheme |
|---------------|-----------------------------|-------------------|
| 1             | 1                           | BPSK, QPSK        |
|               | >1                          | QPSK, 16QAM       |
| 2             | 1                           | BPSK              |

### 10.1.3.3 Layer mapping

Layer mapping shall be done according to clause 5.3.2A with  $\nu=1$  using  $\bar{d}^{(q)}(0), \dots, \bar{d}^{(q)}(M_{\text{symb}}^{(q)} - 1)$  instead of  $d^{(q)}(0), \dots, d^{(q)}(M_{\text{symb}}^{(q)} - 1)$ .

### 10.1.3.4 Transform precoding

Transform precoding shall be done according to clause 5.3.3 with  $M_{\text{RB}}^{\text{PUSCH}} = 1$  and  $M_{\text{sc}}^{\text{PUSCH}}$  replaced by  $M_{\text{sc}}^{\text{NPUSCH}}$ .

### 10.1.3.5 Precoding

Precoding shall be done according to clause 5.3.3A assuming a single antenna port.

### 10.1.3.6 Mapping to physical resources

Each NPUSCH codeword can be mapped to one or more than one resource units,  $N_{\text{RU}}$ , as given by clause 16.5.1.2 of TS 36.213 [4], each of which shall be transmitted  $M_{\text{rep}}^{\text{NPUSCH}}$  times.

The block of complex-valued symbols  $z(0), \dots, z(M_{\text{symb}}^{\text{ap}} - 1)$  shall be multiplied with the amplitude scaling factor  $\beta_{\text{NPUSCH}}$  in order to conform to the transmit power  $P_{\text{NPUSCH}}$  specified in [4], and mapped in sequence starting with  $z(0)$  to subcarriers assigned for transmission of NPUSCH. The mapping to resource elements  $(k, l)$  corresponding to the subcarriers assigned for transmission and not used for transmission of reference signals, shall be in increasing order of first the index  $k$ , then the index  $l$ , starting with the first slot in the assigned resource unit.

After mapping to  $N_{\text{slots}}$  slots, the  $N_{\text{slots}}$  slots shall be repeated  $M_{\text{identical}}^{\text{NPUSCH}} - 1$  additional times, before continuing the mapping of  $z(\cdot)$  to the following slot, where

$$M_{\text{identical}}^{\text{NPUSCH}} = \begin{cases} \min\left(\left\lceil M_{\text{rep}}^{\text{NPUSCH}} / 2 \right\rceil, 4\right) & N_{\text{sc}}^{\text{RU}} > 1 \\ 1 & N_{\text{sc}}^{\text{RU}} = 1 \end{cases}$$

$$N_{\text{slots}} = \begin{cases} 1 & \Delta f = 3.75 \text{ kHz} \\ 2 & \Delta f = 15 \text{ kHz} \end{cases}$$

For a UE communicating over NTN in FDD operation, if the higher layer parameter *npusch-OCC-Enabled* is configured, OCC is indicated as enabled in DCI Format N0 as described in [3], and  $M_{\text{rep}}^{\text{NPUSCH}} \geq 2$ ,

- For  $\Delta f = 15 \text{ kHz}$ , after mapping to a slot, the slot shall be repeated  $M_{\text{identical}}^{\text{NPUSCH}} - 1$  additional times and pairs of slots shall be multiplied by  $q(m)$  before continuing the mapping of  $z(\cdot)$  to the following slot, the process repeats for all the slots in the NPUSCH format 1 transmission before OCC is applied, where for  $N_{\text{sc}}^{\text{RU}} = 1$ ,  $M_{\text{OCC}} = 2$ ,

$N_{\text{identical}}^{\text{NPUSCH}} = M_{\text{OCC}}$ , and  $q(m)$  equals  $[+1 \quad +1]$  or  $[+1 \quad -1]$  as indicated by the DCI Format N0 as described in TS36.212 [3].

- For  $\Delta f = 3.75$  kHz, after mapping to a data symbol, the data symbol shall be repeated  $N_{\text{identical}}^{\text{NPUSCH}} - 1$  additional times and pairs of data symbols shall be multiplied by  $q(m)$  while skipping the DMRS symbol and guard period within the slot, before continuing the mapping of  $z(\cdot)$  to the following data symbol, the process repeats for all the data symbols in the NPUSCH Format 1 transmission before OCC is applied, where for  $N_{\text{sc}}^{\text{RU}} = 1$ ,  $M_{\text{OCC}} = 2$ ,  $N_{\text{identical}}^{\text{NPUSCH}} = M_{\text{OCC}}$ , and  $q(m)$  equals  $[+1 \quad +1]$  or  $[+1 \quad -1]$  as indicated by the DCI Format N0 as described in TS36.212 [3].

For NPUSCH Format 1 and 2 on frame structure type 2 with  $\Delta f = 3.75$  kHz ,

- the NPUSCH transmission is carried out in the first set of  $N_{\text{slots}}$  slots spanning over two contiguous uplink subframes not overlapping with any uplink subframe configured as invalid;
- for TDD configuration 1 and 4, if the starting position for the NPUSCH is indicated as the second of the two contiguous uplink subframes, the NPUSCH transmission is postponed until the start of two consecutive uplink subframes.

If a mapping to  $N_{\text{slots}}$  slots or a repetition of the mapping contains a resource element which overlaps with

- any configured NPRACH resource according to *nprach-ParametersList* in *SystemInformationBlockType2-NB*, or
- any configured NPRACH resource according to *nprach-ParametersList* given by *ul-ConfigList* in *SystemInformationBlockType22-NB* and if the UE indicates *multiCarrier-NPRACH* as supported, or
- any configured NPRACH resource according to *nprach-ParametersList* given by *ul-ConfigListMixed* in *SystemInformationBlockType22-NB* and if the UE indicates *multiCarrier-NPRACH* and *mixedOperationMode* as supported, or
- any configured NPRACH resource according to *nprach-ParametersListFmt2* in *SystemInformationBlockType2-NB* and if the UE indicates *nprach-Format2* as supported, or
- any configured NPRACH resource according to *nprach-ParametersListFmt2* given by *ul-ConfigList* in *SystemInformationBlockType23-NB* and if the UE indicates *multiCarrier-NPRACH* and *nprach-Format2* as supported, or
- any configured NPRACH resource according to *nprach-ParametersListFmt2* given by *ul-ConfigListMixed* in *SystemInformationBlockType23-NB* and if the UE indicates *multiCarrier-NPRACH*, *mixedOperationMode* and *nprach-Format2* as supported, or
- any configured NPRACH resource according to *nprach-ParametersListTDD* in *SystemInformationBlockType2-NB*, or
- any configured NPRACH resource according to *nprach-ParametersListTDD* in *SystemInformationBlockType22-NB* and if the UE indicates *multiCarrier-NPRACH* as supported, or
- any configured NPRACH resource configured for Early Data Transmission and if the NPUSCH transmission is during an Early Data Transmission procedure [12, Clause 7.3b],

then,

- for  $\Delta f = 3.75$  kHz ,
  - if a UE communicating over NTN in FDD operation, and the higher layer parameter *npusch-OCC-Enabled* is configured, and OCC is indicated as enabled in DCI Format N0 as described in [3], and  $M_{\text{rep}}^{\text{NPUSCH}} \geq 2$ , then the NPUSCH transmission in overlapped  $N_{\text{slots}}$  slots is postponed until the next  $N_{\text{slots}}$  slots starting with the first slot satisfying  $(5n_f + n_s) \bmod 4 = 0$  and not overlapping with any configured NPRACH resource,
  - otherwise, the NPUSCH transmission in overlapped  $N_{\text{slots}}$  slots is postponed until the next  $N_{\text{slots}}$  slots not overlapping with any configured NPRACH resource.

- for  $\Delta f = 15$  kHz the NPUSCH transmission in overlapped  $N_{\text{slots}}$  slots is postponed until the next  $N_{\text{slots}}$  slots starting with the first slot satisfying  $n_s \bmod 2 = 0$  and not overlapping with any configured NPRACH resource.

NPRACH gaps as defined in clause 10.1.6.1 are not part of the NPRACH resource. For frame structure type 2, the valid uplink subframes which are not used for NPRACH transmission when it is not possible to map G symbol groups back-to-back are not part of the NPRACH resource. The mapping of  $z(0), \dots, z(M_{\text{symb}}^{\text{ap}} - 1)$  is then repeated until

$M_{\text{rep}}^{\text{NPUSCH}} N_{\text{RU}} N_{\text{slots}}^{\text{UL}}$  slots have been transmitted. After transmissions and/or postponements due to NPRACH of  $256 \cdot 30720 T_s$  time units, for frame structure type 1 for FDD, a gap of  $40 \cdot 30720 T_s$  time units shall be inserted where the NPUSCH transmission is postponed. The portion of a postponement due to NPRACH which coincides with a gap is counted as part of the gap.

When higher layer parameter *npusch-AllSymbols* is set to false, resource elements in SC-FDMA symbols overlapping with a symbol configured with SRS according to *srs-SubframeConfig* shall be counted in the NPUSCH mapping but not used for transmission of the NPUSCH. When higher layer parameter *npusch-AllSymbols* is set to true, all symbols are transmitted.

If higher layer parameter *resourceReservationConfigUL* is configured, then in case of NPUSCH format 1 transmission associated with C-RNTI or SPS C-RNTI using UE-specific NPDCCH search space with the Resource reservation field in the DCI set to 1 including NPUSCH format 1 transmission without a corresponding NPDCCH, or in case of NPUSCH format 2 transmission associated with C-RNTI using UE-specific NPDCCH search space,

- In a subframe for  $\Delta f = 15$  kHz or a slot for  $\Delta f = 3.75$  kHz that is overlapping with any fully reserved uplink subframe as defined in clause 16.5 in [4],
  - for  $\Delta f = 15$  kHz, the NPUSCH transmission is postponed until the next NB-IoT uplink subframe that is not fully reserved.
  - for  $\Delta f = 3.75$  kHz, the NPUSCH transmission in the slot is postponed until the next slot spanning over two contiguous uplink subframes not overlapping with any uplink subframe that is fully reserved.
- In a subframe for  $\Delta f = 15$  kHz or a slot for  $\Delta f = 3.75$  kHz that is not overlapping with any fully reserved uplink subframe, any SC-FDMA symbols overlapping with reserved symbols shall be counted in the NPUSCH mapping but not used for transmission of the NPUSCH.

For a UE communicating over NTN, after transmissions (and/or postponements due to NPRACH) of  $N_{\text{segment}}^{\text{precompensation}}$  time units, for frame structure type 1 for FDD, a transmission gap of  $N_{\text{gap}}^{\text{precompensation}}$  time units shall be counted for the NPUSCH resource mapping but not used for transmission of the NPUSCH according to the UE capability *ntn-SegmentedPrecompensationGaps-r17* as specified in 3GPP TS 36.331 [9]. The quantity  $N_{\text{segment}}^{\text{precompensation}}$  is provided by higher layers, and the quantity of  $N_{\text{gap}}^{\text{precompensation}}$  is configured by higher layers based on the UE capability if signalled.

## 10.1.4 Demodulation reference signal

### 10.1.4.1 Reference signal sequence

#### 10.1.4.1.1 Reference signal sequence for $N_{\text{sc}}^{\text{RU}} = 1$

The reference signal sequence  $\bar{r}_u(n)$  for  $N_{\text{sc}}^{\text{RU}} = 1$  is defined by

$$\bar{r}_u(n) = \frac{1}{\sqrt{2}} (1 + j) (1 - 2c(n)) w(n \bmod 16), \quad 0 \leq n < M_{\text{rep}}^{\text{NPUSCH}} N_{\text{slots}}^{\text{UL}} N_{\text{RU}}$$

where the binary sequence  $c(n)$  is defined by clause 7.2 and shall be initialised with  $c_{\text{init}} = 35$  at the start of the NPUSCH transmission. The quantity  $w(n)$  is given by Table 10.1.4.1.1-1 where  $u = N_{\text{ID}}^{\text{Ncell}} \bmod 16$  for NPUSCH format 2, and for NPUSCH format 1 if group hopping is not enabled, and by clause 10.1.4.1.3 if group hopping is enabled for NPUSCH format 1.

**Table 10.1.4.1.1-1: Definition of  $w(n)$** 

| $u$ | $w(0), \dots, w(15)$ |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|----------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1                    | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  |
| 1   | 1                    | -1 | 1  | -1 | 1  | -1 | 1  | -1 | 1  | -1 | 1  | -1 | 1  | -1 | 1  | -1 |
| 2   | 1                    | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 |
| 3   | 1                    | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | -1 | 1  |
| 4   | 1                    | 1  | 1  | 1  | -1 | -1 | -1 | -1 | 1  | 1  | 1  | 1  | -1 | -1 | -1 | -1 |
| 5   | 1                    | -1 | 1  | -1 | -1 | 1  | -1 | 1  | 1  | -1 | 1  | -1 | -1 | 1  | -1 | 1  |
| 6   | 1                    | 1  | -1 | -1 | -1 | -1 | 1  | 1  | 1  | 1  | -1 | -1 | -1 | -1 | 1  | 1  |
| 7   | 1                    | -1 | -1 | 1  | -1 | 1  | 1  | -1 | 1  | -1 | -1 | 1  | -1 | 1  | 1  | -1 |
| 8   | 1                    | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | -1 | -1 | -1 | -1 | -1 | -1 | -1 |
| 9   | 1                    | -1 | 1  | -1 | 1  | -1 | 1  | -1 | -1 | 1  | -1 | 1  | -1 | 1  | -1 | 1  |
| 10  | 1                    | 1  | -1 | -1 | 1  | 1  | -1 | -1 | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  |
| 11  | 1                    | -1 | -1 | 1  | 1  | -1 | -1 | 1  | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 |
| 12  | 1                    | 1  | 1  | 1  | -1 | -1 | -1 | -1 | -1 | -1 | -1 | -1 | 1  | 1  | 1  | 1  |
| 13  | 1                    | -1 | 1  | -1 | -1 | 1  | -1 | 1  | -1 | 1  | -1 | 1  | 1  | -1 | 1  | -1 |
| 14  | 1                    | 1  | -1 | -1 | -1 | -1 | 1  | 1  | -1 | -1 | 1  | 1  | 1  | 1  | -1 | -1 |
| 15  | 1                    | -1 | -1 | 1  | -1 | 1  | 1  | -1 | -1 | 1  | 1  | -1 | 1  | -1 | -1 | 1  |

The reference signal sequence for NPUSCH format 1 is given by:

$$r_u(n) = \bar{r}_u(n)$$

The reference signal sequence for NPUSCH format 2 is given by

$$r_u(3n + m) = \bar{w}(m) \bar{r}_u(n), \quad m = 0, 1, 2$$

where  $\bar{w}(m)$  is defined in Table 5.5.2.2.1-2 with the sequence index chosen according to  $(\sum_{i=0}^7 c(8n' + i) \cdot 2^i) \bmod 3$  with  $c_{\text{init}} = N_{\text{ID}}^{\text{Ncell}}$ . For frame structure type 1,  $n' = n_s$ . For frame structure type 2,  $n' = (n_s + n_f) \bmod 5$  for  $\Delta f = 3.75$  kHz and  $n' = (n_s + n_f) \bmod 20$  for  $\Delta f = 15$  kHz.

#### 10.1.4.1.1.1 OCC reference signal sequence for $N_{\text{sc}}^{\text{RU}} = 1$ with $\Delta f = 15$ kHz

For a UE communicating over NTN, the OCC reference signal sequence  $\bar{r}_{u,\text{OCC}}(n)$  for  $N_{\text{sc}}^{\text{RU}} = 1$  is defined by

$$\begin{aligned} \bar{r}_{u,\text{OCC}}(M_{\text{OCC}}n + m) &= \bar{r}_u(n)q(m) \\ n &= 0, 1, \dots, (M_{\text{rep}}^{\text{NPUSCH}} N_{\text{slots}}^{\text{UL}} N_{\text{RU}}) / M_{\text{OCC}} - 1 \end{aligned}$$

where

- $M_{\text{OCC}} = 2$
- $M_{\text{rep}}^{\text{NPUSCH}} \geq 2$
- $m = 0, 1$
- the subcarrier indication field in the DCI selects one of
  - $q(m) = [1 \quad 1]$
  - $q(m) = [1 \quad -1]$

For NPUSCH format 1 transmission with  $\Delta f = 15$  kHz, the start of the NPUSCH Format 1 transmission is as described in clause 16.5.1 of [4], when OCC is applied, after the start of the NPUSCH Format 1 transmission the DMRS symbols are transmitted according to  $\bar{r}_{u,\text{OCC}}(M_{\text{OCC}}n + m)$ .

#### 10.1.4.1.1.2 OCC reference signal sequence for $N_{\text{sc}}^{\text{RU}} = 1$ with $\Delta f = 3.75$ kHz

For a UE communicating over NTN, the OCC reference signal sequence  $\bar{r}_{u,\text{OCC}}(n)$  for  $N_{\text{sc}}^{\text{RU}} = 1$  is defined by

$$\bar{r}_{u,\text{OCC}}(n) = \begin{cases} \bar{r}_u(n') & \text{if } \lfloor n/M_{\text{OCC}} \rfloor \bmod M_{\text{OCC}} = p \\ 0 & \text{otherwise} \end{cases}$$

$$n = 0, 1, \dots, M_{\text{rep}}^{\text{NPUSCH}} N_{\text{slots}}^{\text{UL}} N_{\text{RU}} - 1$$

$$n' = n - \lfloor n/M_{\text{OCC}} \rfloor - p$$

where

- $M_{\text{OCC}} = 2$
- $M_{\text{rep}}^{\text{NPUSCH}} \geq 2$
- $p = 1$  if the DCI indicates OCC sequence [1 1], otherwise  $p = 0$ .

#### 10.1.4.1.2 Reference signal sequence for $N_{\text{sc}}^{\text{RU}} > 1$

The reference signal sequences  $r_u(n)$  for  $N_{\text{sc}}^{\text{RU}} > 1$  is defined by a cyclic shift  $\alpha$  of a base sequence according to

$$r_u(n) = e^{j\alpha n} e^{j\phi(n)\pi/4}, \quad 0 \leq n < N_{\text{sc}}^{\text{RU}},$$

where  $\phi(n)$  is given by Table 10.1.4.1.2-1 for  $N_{\text{sc}}^{\text{RU}} = 3$ , Table 10.1.4.1.2-2 for  $N_{\text{sc}}^{\text{RU}} = 6$  and Table 5.5.1.2-1 for  $N_{\text{sc}}^{\text{RU}} = 12$ .

If group hopping is not enabled, the base sequence index  $u$  is given by higher layer parameters *threeTone-BaseSequence*, *sixTone-BaseSequence*, and *twelveTone-BaseSequence* for  $N_{\text{sc}}^{\text{RU}} = 3$ ,  $N_{\text{sc}}^{\text{RU}} = 6$ , and  $N_{\text{sc}}^{\text{RU}} = 12$ , respectively. If not signalled by higher layers, the base sequence is given by

$$u = \begin{cases} N_{\text{ID}}^{\text{Ncell}} \bmod 12 & \text{for } N_{\text{sc}}^{\text{RU}} = 3 \\ N_{\text{ID}}^{\text{Ncell}} \bmod 14 & \text{for } N_{\text{sc}}^{\text{RU}} = 6 \\ N_{\text{ID}}^{\text{Ncell}} \bmod 30 & \text{for } N_{\text{sc}}^{\text{RU}} = 12 \end{cases}$$

If group hopping is enabled, the base sequence index  $u$  is given by clause 10.1.4.1.3.

The cyclic shift  $\alpha$  for  $N_{\text{sc}}^{\text{RU}} = 3$  and  $N_{\text{sc}}^{\text{RU}} = 6$  is derived from higher layer parameters *threeTone-CyclicShift* and *sixTone-CyclicShift*, respectively, as defined in Table 10.1.4.1.2-3. For  $N_{\text{sc}}^{\text{RU}} = 12$ , if *npusch-CyclicShift* in *PUR-Config-NB* is configured for NPUSCH (re)transmission corresponding to preconfigured uplink resource it provides the value of  $n_{\text{cs}}$  and the cyclic shift  $\alpha$  in a slot  $n_s$  is given as  $\alpha = 2\pi n_{\text{cs}}/12$ , otherwise  $\alpha = 0$ .

**Table 10.1.4.1.2-1: Definition of  $\phi(n)$  for  $N_{\text{sc}}^{\text{RU}} = 3$**

| $u$ | $\phi(0), \phi(1), \phi(2)$ |    |    |
|-----|-----------------------------|----|----|
| 0   | 1                           | -3 | -3 |
| 1   | 1                           | -3 | -1 |
| 2   | 1                           | -3 | 3  |
| 3   | 1                           | -1 | -1 |
| 4   | 1                           | -1 | 1  |
| 5   | 1                           | -1 | 3  |
| 6   | 1                           | 1  | -3 |
| 7   | 1                           | 1  | -1 |
| 8   | 1                           | 1  | 3  |
| 9   | 1                           | 3  | -1 |
| 10  | 1                           | 3  | 1  |
| 11  | 1                           | 3  | 3  |

**Table 10.1.4.1.2-2: Definition of  $\phi(n)$  for  $N_{\text{sc}}^{\text{RU}} = 6$**

| $u$ | $\phi(0), \dots, \phi(5)$ |   |   |   |   |    |
|-----|---------------------------|---|---|---|---|----|
| 0   | 1                         | 1 | 1 | 1 | 3 | -3 |

|    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|
| 1  | 1  | 1  | 3  | 1  | -3 | 3  |
| 2  | 1  | -1 | -1 | -1 | 1  | -3 |
| 3  | 1  | -1 | 3  | -3 | -1 | -1 |
| 4  | 1  | 3  | 1  | -1 | -1 | 3  |
| 5  | 1  | -3 | -3 | 1  | 3  | 1  |
| 6  | -1 | -1 | 1  | -3 | -3 | -1 |
| 7  | -1 | -1 | -1 | 3  | -3 | -1 |
| 8  | 3  | -1 | 1  | -3 | -3 | 3  |
| 9  | 3  | -1 | 3  | -3 | -1 | 1  |
| 10 | 3  | -3 | 3  | -1 | 3  | 3  |
| 11 | -3 | 1  | 3  | 1  | -3 | -1 |
| 12 | -3 | 1  | -3 | 3  | -3 | -1 |
| 13 | -3 | 3  | -3 | 1  | 1  | -3 |

**Table 10.1.4.1.2-3: Definition of  $\alpha$** 

| $N_{sc}^{RU} = 3$            |            | $N_{sc}^{RU} = 6$          |            |
|------------------------------|------------|----------------------------|------------|
| <i>threeTone-CyclicShift</i> | $\alpha$   | <i>sixTone-CyclicShift</i> | $\alpha$   |
| 0                            | 0          | 0                          | 0          |
| 1                            | $2\pi / 3$ | 1                          | $2\pi / 6$ |
| 2                            | $4\pi / 3$ | 2                          | $4\pi / 6$ |
|                              |            | 3                          | $8\pi / 6$ |

#### 10.1.4.1.3 Group hopping

For the reference signal for NPUSCH format 1, sequence-group hopping can be enabled where the sequence-group number  $u$  in slot  $n_s$  of a radio frame  $n_f$  is defined by a group hopping pattern  $f_{gh}(n')$  and a sequence-shift pattern  $f_{ss}$  according to

$$u = (f_{gh}(n') + f_{ss}) \bmod N_{seq}^{RU}$$

where the number of reference signal sequences available for each resource unit size,  $N_{seq}^{RU}$  is given by Table 10.1.4.1.3-1.

**Table 10.1.4.1.3-1: Definition of  $N_{seq}^{RU}$** 

| $N_{sc}^{RU}$ | $N_{seq}^{RU}$ |
|---------------|----------------|
| 1             | 16             |
| 3             | 12             |
| 6             | 14             |
| 12            | 30             |

Sequence-group hopping can be enabled or disabled by means of the cell-specific parameter *groupHoppingEnabled* provided by higher layers. Sequence-group hopping for NPUSCH can be disabled for a certain UE through the higher-layer parameter *groupHoppingDisabled* despite being enabled on a cell basis unless the NPUSCH transmission corresponds to a Random Access Response Grant or a retransmission of the same transport block as part of the contention based random access procedure.

The group-hopping pattern  $f_{gh}(n')$  is given by

$$f_{gh}(n') = (\sum_{i=0}^7 c(8n' + i) \cdot 2^i) \bmod N_{seq}^{RU}$$

where  $n' = n_s$  for  $N_{sc}^{RU} > 1$ . When  $N_{sc}^{RU} = 1$ , for frame structure type 1,  $n'$  is the slot number  $n_s$  of the first slot of the resource unit and for frame structure type 2,  $n'$  is the frame number  $n_f$  of the first slot of the resource unit. The pseudo-

random sequence  $c(i)$  is defined by clause 7.2. The pseudo-random sequence generator shall be initialized with  $c_{\text{init}} = \lfloor N_{\text{ID}}^{\text{Ncell}} / N_{\text{seq}}^{\text{RU}} \rfloor$  at the beginning of the resource unit for  $N_{\text{sc}}^{\text{RU}} = 1$  and in every even slot for  $N_{\text{sc}}^{\text{RU}} > 1$ .

The sequence-shift pattern  $f_{\text{ss}}$  is given by

$$f_{\text{ss}} = (N_{\text{ID}}^{\text{Ncell}} + \Delta_{\text{ss}}) \bmod N_{\text{seq}}^{\text{RU}}$$

where  $\Delta_{\text{ss}} \in \{0, 1, \dots, 29\}$  is given by higher-layer parameter *groupAssignmentNPUSCH*. If no value is signalled,  $\Delta_{\text{ss}} = 0$ .

#### 10.1.4.2 Mapping to physical resources

The sequence  $r(\cdot)$  shall be multiplied with the amplitude scaling factor  $\beta_{\text{NPUSCH}}$  and mapped in sequence starting with  $r(0)$  to the sub-carriers.

The set of sub-carriers used in the mapping process shall be identical to the corresponding NPUSCH transmission as defined in clause 10.1.3.6.

The mapping to resource elements  $(k, l)$  shall be in increasing order of first  $k$ , then  $l$ , and finally the slot number. The values of the symbol index  $l$  in a slot are given in Table 10.1.4.2-1.

**Table 10.1.4.2-1: Demodulation reference signal location for NPUSCH.**

| NPUSCH format | Values for $l$        |                     |
|---------------|-----------------------|---------------------|
|               | $\Delta f = 3.75$ kHz | $\Delta f = 15$ kHz |
| 1             | 4                     | 3                   |
| 2             | 0,1,2                 | 2,3,4               |

If higher layer parameter *resourceReservationConfigUL* is configured, then in case of NPUSCH format 1 transmission associated with C-RNTI or SPS C-RNTI using UE-specific NPDCCH search space and the Resource reservation field in the DCI is set to 1 including NPUSCH format 1 transmission without a corresponding NPDCCH, or in case of NPUSCH format 2 transmission associated with C-RNTI using UE-specific NPDCCH search space,

- In a subframe for  $\Delta f = 15$  kHz or a slot for  $\Delta f = 3.75$  kHz that is overlapping with any fully reserved uplink subframe as defined in clause 16.5 in [4],
  - for  $\Delta f = 15$  kHz, the demodulation reference signal transmission is postponed until the next NB-IoT uplink subframe that is not fully reserved.
  - for  $\Delta f = 3.75$  kHz, the demodulation reference signal transmission in the slot is postponed until the next slot spanning over two contiguous uplink subframes not overlapping with any uplink subframe that is fully reserved.
- In a subframe for  $\Delta f = 15$  kHz or a slot for  $\Delta f = 3.75$  kHz that is not overlapping with any fully reserved uplink subframe, any demodulation reference signal transmission in SC-FDMA symbols overlapping with reserved symbols is dropped.

#### 10.1.5 SC-FDMA baseband signal generation

For  $N_{\text{sc}}^{\text{RU}} > 1$ , the time-continuous signal  $s_l(t)$  in SC-FDMA symbol  $l$  in a slot is defined by clause 5.6 with the quantity  $N_{\text{RB}}^{\text{UL}} N_{\text{sc}}^{\text{RB}}$  replaced by  $N_{\text{sc}}^{\text{UL}}$ .

For  $N_{\text{sc}}^{\text{RU}} = 1$ , the time-continuous signal  $s_{k,l}(t)$  for sub-carrier index  $k$  in SC-FDMA symbol  $l$  in an uplink slot is defined by

$$s_{k,l}(t) = a_{k^{(-)},l} \cdot e^{j\phi_{k,l}} \cdot e^{j2\pi(k+1/2)\Delta f(t - N_{CP,l}T_s)}$$

$$k^{(-)} = k + \left\lfloor N_{sc}^{UL}/2 \right\rfloor$$

for  $0 \leq t < (N_{CP,l} + N)T_s$  where parameters for  $\Delta f = 15$  kHz and  $\Delta f = 3.75$  kHz are given in Table 10.1.5-1,  $a_{k^{(-)},l}$  is the modulation value of symbol  $l$ , and the phase rotation  $\phi_{k,l}$  is defined by

$$\phi_{k,j} = \rho(\tilde{l} \bmod 2) + \varphi_k(\tilde{l})$$

$$\rho = \begin{cases} \frac{\pi}{2} & \text{for BPSK} \\ \frac{\pi}{4} & \text{for QPSK} \end{cases}$$

$$\varphi_k(\tilde{l}) = \begin{cases} 0 & \tilde{l} = 0 \\ \varphi_k(\tilde{l} - 1) + 2\pi\Delta f(k + 1/2)(N + N_{CP,l})T_s & \tilde{l} > 0 \end{cases}$$

$$\tilde{l} = 0, 1, \dots, N_{TB} M_{rep}^{NPUSCH} N_{RU} N_{slots}^{UL} N_{symp}^{UL} - 1$$

$$l = \tilde{l} \bmod N_{symp}^{UL}$$

where  $N_{TB}$  is the number of transport blocks defined in 16.5.1 of TS 36.213 [4]. If  $N_{TB} > 1$  and interleaving between codewords is applied according to clause 16.5.1 of TS 36.213 [4], then the symbol counter  $\tilde{l}$  is reset at the start of the first NPUSCH codeword transmission and incremented for each symbol during the transmission of the  $N_{TB}$  NPUSCH codewords. For other cases, the symbol counter  $\tilde{l}$  is reset to 0 at the start of each NPUSCH codeword transmission and incremented for each symbol during the transmission of the NPUSCH codeword.

**Table 10.1.5-1: SC-FDMA parameters for  $N_{sc}^{RU} = 1$**

| Parameter                       | $\Delta f = 3.75$ kHz | $\Delta f = 15$ kHz                             |
|---------------------------------|-----------------------|-------------------------------------------------|
| $N$                             | 8192                  | 2048                                            |
| Cyclic prefix length $N_{CP,l}$ | 256                   | 160 for $l = 0$<br>144 for $l = 1, 2, \dots, 6$ |
| Set of values for $k$           | -24, -23, ..., 23     | -6, -5, ..., 5                                  |

The SC-FDMA symbols in a slot shall be transmitted in increasing order of  $l$ , starting with  $l = 0$ , where SC-FDMA symbol  $l > 0$  starts at time  $\sum_{l'=0}^{l-1} (N_{CP,l'} + N)T_s$  within the slot. For  $\Delta f = 3.75$  kHz, the remaining  $2304T_s$  in  $T_{slot}$  are not transmitted and used for guard period.

Only normal CP is supported for Narrowband IoT uplink in this release of the specification.

## 10.1.6 Narrowband physical random-access channel

### 10.1.6.1 Time and frequency structure

The physical layer random access preamble is based on single-subcarrier frequency-hopping symbol groups. A symbol group is illustrated in Figure 10.1.6.1-1, consisting of a cyclic prefix of length  $T_{CP}$  and a sequence of  $N$  identical symbols with total length  $T_{SEQ}$ . The total number of symbol groups in a preamble repetition unit is denoted by  $P$ . The number of time-contiguous symbol groups is given by  $G$ .

The parameter values for frame structures 1 and 2 are listed in Tables 10.1.6.1-1 and 10.1.6.1-2, respectively.

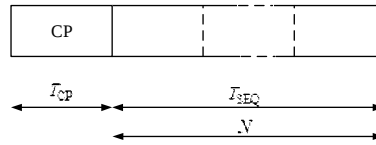


Figure 10.1.6.1-1: Random access symbol group

Table 10.1.6.1-1: Random access preamble parameters for frame structure type 1

| Preamble format                                                    | $G$ | $P$ | $N$ | $T_{CP}$   | $T_{SEQ}$          |
|--------------------------------------------------------------------|-----|-----|-----|------------|--------------------|
| 0                                                                  | 4   | 4   | 5   | $2048T_s$  | $5 \cdot 8192T_s$  |
| 1                                                                  | 4   | 4   | 5   | $8192T_s$  | $5 \cdot 8192T_s$  |
| 2 (note 1)                                                         | 6   | 6   | 3   | $24576T_s$ | $3 \cdot 24576T_s$ |
| Note 1: Not used for IoT NTN TDD operation with frame structure 1. |     |     |     |            |                    |

Table 10.1.6.1-2: Random access preamble parameters for frame structure type 2

| Preamble format | Supported uplink-downlink configurations | $G$ | $P$ | $N$ | $T_{CP}$  | $T_{SEQ}$         |
|-----------------|------------------------------------------|-----|-----|-----|-----------|-------------------|
| 0               | 1, 2, 3, 4, 5                            | 2   | 4   | 1   | $4768T_s$ | $1 \cdot 8192T_s$ |
| 1               | 1, 4                                     | 2   | 4   | 2   | $8192T_s$ | $2 \cdot 8192T_s$ |
| 2               | 3                                        | 2   | 4   | 4   | $8192T_s$ | $4 \cdot 8192T_s$ |
| 0-a             | 1, 2, 3, 4, 5                            | 3   | 6   | 1   | $1536T_s$ | $1 \cdot 8192T_s$ |
| 1-a             | 1, 4                                     | 3   | 6   | 2   | $3072T_s$ | $2 \cdot 8192T_s$ |

The preamble consisting of  $P$  symbol groups shall be transmitted  $N_{\text{rep}}^{\text{NPRACH}}$  times.

For IoT NTN TDD operation with frame structure 1, a preamble repetition unit shall be fully transmitted within the 8 consecutive uplink subframes of the 90 ms interval described in clause 4.4, whereas the transmission of a preamble repetition unit that is partially or not within the 8 consecutive uplink subframes shall be postponed until the next 8 consecutive uplink subframes of the 90 ms interval.

For frame structure type 2, when an invalid uplink subframe overlaps the transmission of  $G$  symbol groups without a gap, the  $G$  symbol groups are dropped. For frame structure type 2, the transmission of  $G$  symbol groups are aligned with the subframe boundary.

The transmission of a random-access preamble, if triggered by the MAC layer, is restricted to certain time and frequency resources.

A NPRACH configuration provided by higher layers contains the following:

- NPRACH resource periodicity  $N_{\text{period}}^{\text{NPRACH}}$  (*nprach-Periodicity*),
- frequency location of the first subcarrier allocated to NPRACH  $N_{\text{sc}^{\text{offset}}}^{\text{NPRACH}}$  (*nprach-SubcarrierOffset*),
- number of subcarriers allocated to NPRACH  $N_{\text{sc}}^{\text{NPRACH}}$  (*nprach-NumSubcarriers*),

- number of starting sub-carriers allocated to UE initiated random access  $N_{\text{sc\_cont}}^{\text{NPRACH}}$  (*nprach-NumCBRA-StartSubcarriers*),
- number of NPRACH repetitions per attempt  $N_{\text{rep}}^{\text{NPRACH}}$  (*numRepetitionsPerPreambleAttempt*),
- NPRACH starting time  $N_{\text{start}}^{\text{NPRACH}}$  (*nprach-StartTime*),
- Fraction for calculating starting subcarrier index for the range of NPRACH subcarriers reserved for indication of UE support for multi-tone msg3 transmission  $N_{\text{MSG3}}^{\text{NPRACH}}$  (*nprach-SubcarrierMSG3-RangeStart*).

NPRACH transmission can start only  $N_{\text{start}}^{\text{NPRACH}} \cdot 30720 T_s$  time units after the start of a radio frame fulfilling  $n_f \bmod (N_{\text{period}}^{\text{NPRACH}}/10) = 0$ . For frame structure type 1 for FDD, after transmissions of  $4 \cdot 64(T_{\text{CP}} + T_{\text{SEQ}})$  time units for preamble formats 0 and 1, or  $16 \cdot 6(T_{\text{CP}} + T_{\text{SEQ}})$  time units for preamble format 2, a gap of  $40 \cdot 30720 T_s$  time units shall be inserted.

NPRACH configurations where  $N_{\text{scoffset}}^{\text{NPRACH}} + N_{\text{sc}}^{\text{NPRACH}} > N_{\text{sc}}^{\text{UL}}$  are invalid.

The NPRACH starting subcarriers allocated to UE initiated random access are split in two sets of subcarriers,  $\{0, 1, \dots, \lfloor N_{\text{sc\_cont}}^{\text{NPRACH}} N_{\text{MSG3}}^{\text{NPRACH}} \rfloor - 1\}$  and  $\{\lfloor N_{\text{sc\_cont}}^{\text{NPRACH}} N_{\text{MSG3}}^{\text{NPRACH}} \rfloor, \dots, N_{\text{sc\_cont}}^{\text{NPRACH}} - 1\}$ , where the second set, if present, indicate UE support for multi-tone msg3 transmission.

The frequency location of the NPRACH transmission is constrained within  $N_{\text{sc}}^{\text{RA}} = 12$  sub-carriers, and within  $N_{\text{sc}}^{\text{RA}} = 36$  subcarriers when preamble format 2 as described in Table 10.1.6.1-1 is configured. Frequency hopping shall be used within the 12 subcarriers and 36 subcarriers when preamble format 2 as described in Table 10.1.6.1-1 is configured, where the frequency location of the  $i^{\text{th}}$  symbol group is given by  $n_{\text{sc}}^{\text{RA}}(i) = n_{\text{start}} + \tilde{n}_{\text{sc}}^{\text{RA}}(i)$  where  $n_{\text{start}} = N_{\text{scoffset}}^{\text{NPRACH}} + \lfloor n_{\text{init}} / N_{\text{sc}}^{\text{RA}} \rfloor \cdot N_{\text{sc}}^{\text{RA}}$ . The quantity  $\tilde{n}_{\text{sc}}^{\text{RA}}(i)$  depends on the frame structure.

For frame structure type 1:

- if  $G = 4, P = 4$  for preamble formats 0 and 1 as described in Table 10.1.6.1-1:

$$\tilde{n}_{\text{sc}}^{\text{RA}}(i) = \begin{cases} (\tilde{n}_{\text{sc}}^{\text{RA}}(0) + f(i/4)) \bmod N_{\text{sc}}^{\text{RA}} & i \bmod 4 = 0 \text{ and } i > 0 \\ \tilde{n}_{\text{sc}}^{\text{RA}}(i-1) + 1 & i \bmod 4 = 1, 3 \text{ and } \tilde{n}_{\text{sc}}^{\text{RA}}(i-1) \bmod 2 = 0 \\ \tilde{n}_{\text{sc}}^{\text{RA}}(i-1) - 1 & i \bmod 4 = 1, 3 \text{ and } \tilde{n}_{\text{sc}}^{\text{RA}}(i-1) \bmod 2 = 1 \\ \tilde{n}_{\text{sc}}^{\text{RA}}(i-1) + 6 & i \bmod 4 = 2 \text{ and } \tilde{n}_{\text{sc}}^{\text{RA}}(i-1) < 6 \\ \tilde{n}_{\text{sc}}^{\text{RA}}(i-1) - 6 & i \bmod 4 = 2 \text{ and } \tilde{n}_{\text{sc}}^{\text{RA}}(i-1) \geq 6 \end{cases}$$

$$f(t) = \left( f(t-1) + \left( \sum_{n=10t+1}^{10t+9} c(n) 2^{n-(10t+1)} \right) \bmod (N_{\text{sc}}^{\text{RA}} - 1) + 1 \right) \bmod N_{\text{sc}}^{\text{RA}}$$

$$f(-1) = 0$$

where  $\tilde{n}_{\text{sc}}^{\text{RA}}(0) = n_{\text{init}} \bmod N_{\text{sc}}^{\text{RA}}$  with  $n_{\text{init}}$  being the subcarrier selected by the MAC layer from  $\{0, 1, \dots, N_{\text{sc}}^{\text{NPRACH}} - 1\}$ , and the pseudo random sequence  $c(n)$  is given by clause 7.2. The pseudo random sequence generator shall be initialised with  $c_{\text{init}} = N_{\text{ID}}^{\text{Ncell}}$ .

- if  $G = 6, P = 6$  for preamble format 2 as described in Table 10.1.6.1-1:

$$\tilde{n}_{SC}^{RA}(i) = \begin{cases} (\tilde{n}_{SC}^{RA}(0) + f(i/6)) \bmod N_{sc}^{RA} & i \bmod 6 = 0 \text{ and } i > 0 \\ \tilde{n}_{SC}^{RA}(i-1) + 1 & i \bmod 6 = 1, 5 \text{ and } \tilde{n}_{SC}^{RA}(i-1) \bmod 2 = 0 \\ \tilde{n}_{SC}^{RA}(i-1) - 1 & i \bmod 6 = 1, 5 \text{ and } \tilde{n}_{SC}^{RA}(i-1) \bmod 2 = 1 \\ \tilde{n}_{SC}^{RA}(i-1) + 3 & i \bmod 6 = 2, 4 \text{ and } \lfloor \tilde{n}_{SC}^{RA}(i-1)/3 \rfloor \bmod 2 = 0 \\ \tilde{n}_{SC}^{RA}(i-1) - 3 & i \bmod 6 = 2, 4 \text{ and } \lfloor \tilde{n}_{SC}^{RA}(i-1)/3 \rfloor \bmod 2 = 1 \\ \tilde{n}_{SC}^{RA}(i-1) + 18 & i \bmod 6 = 3 \text{ and } \tilde{n}_{SC}^{RA}(i-1) < 18 \\ \tilde{n}_{SC}^{RA}(i-1) - 18 & i \bmod 6 = 3 \text{ and } \tilde{n}_{SC}^{RA}(i-1) \geq 18 \end{cases}$$

$$f(t) = (f(t-1) + (\sum_{n=10t+1}^{10t+9} c(n) 2^{n-(10t+1)}) \bmod (N_{sc}^{RA} - 1) + 1) \bmod N_{sc}^{RA}$$

$$f(-1) = 0$$

where  $\tilde{n}_{SC}^{RA}(0) = n_{init} \bmod N_{sc}^{RA}$  with  $n_{init}$  being the subcarrier selected by the MAC layer from  $\{0, 1, \dots, N_{sc}^{NPRACH} - 1\}$ , and the pseudo random sequence  $c(n)$  is given by clause 7.2. The pseudo random sequence generator shall be initialised with  $c_{init} = N_{ID}^{Ncell}$ .

For frame structure type 2:

- if  $G = 2, P = 4$  for preamble formats 0, 1, and 2 as described in Table 10.1.6.1-2:

$$\tilde{n}_{SC}^{RA}(i) = \begin{cases} Y & i \bmod 8 = 0, 2 \text{ and } i > 0 \\ \tilde{n}_{SC}^{RA}(i-1) + 1 & i \bmod 8 = 1 \text{ and } \tilde{n}_{SC}^{RA}(i-1) = 0, 2, 4, 6, 8, 10 \\ \tilde{n}_{SC}^{RA}(i-1) - 1 & i \bmod 8 = 1 \text{ and } \tilde{n}_{SC}^{RA}(i-1) = 1, 3, 5, 7, 9, 11 \\ \tilde{n}_{SC}^{RA}(i-1) + 6 & i \bmod 8 = 3 \text{ and } \tilde{n}_{SC}^{RA}(i-1) = 0, 1, 2, 3, 4, 5 \\ \tilde{n}_{SC}^{RA}(i-1) - 6 & i \bmod 8 = 3 \text{ and } \tilde{n}_{SC}^{RA}(i-1) = 6, 7, 8, 9, 10, 11 \\ 2 \lfloor \frac{Y}{2} \rfloor + 1 & i \bmod 8 = 4 \text{ and } \tilde{n}_{SC}^{RA}(i-4) = 0, 2, 4, 6, 8, 10 \\ 2 \lfloor \frac{Y}{2} \rfloor & i \bmod 8 = 4 \text{ and } \tilde{n}_{SC}^{RA}(i-4) = 1, 3, 5, 7, 9, 11 \\ \tilde{n}_{SC}^{RA}(i-1) - 1 & i \bmod 8 = 5 \text{ and } \tilde{n}_{SC}^{RA}(i-1) = 1, 3, 5, 7, 9, 11 \\ \tilde{n}_{SC}^{RA}(i-1) + 1 & i \bmod 8 = 5 \text{ and } \tilde{n}_{SC}^{RA}(i-1) = 0, 2, 4, 6, 8, 10 \\ Y \bmod 6 + 6 & i \bmod 8 = 6 \text{ and } \tilde{n}_{SC}^{RA}(i-4) = 0, 1, 2, 3, 4, 5 \\ Y \bmod 6 & i \bmod 8 = 6 \text{ and } \tilde{n}_{SC}^{RA}(i-4) = 6, 7, 8, 9, 10, 11 \\ \tilde{n}_{SC}^{RA}(i-1) - 6 & i \bmod 8 = 7 \text{ and } \tilde{n}_{SC}^{RA}(i-1) = 6, 7, 8, 9, 10, 11 \\ \tilde{n}_{SC}^{RA}(i-1) + 6 & i \bmod 8 = 7 \text{ and } \tilde{n}_{SC}^{RA}(i-1) = 0, 1, 2, 3, 4, 5 \end{cases}$$

$$Y = (\tilde{n}_{SC}^{RA}(0) + f(i/2)) \bmod N_{sc}^{RA}$$

$$f(t) = (f(t-1) + (\sum_{n=10t+1}^{10t+9} c(n) 2^{n-(10t+1)}) \bmod (N_{sc}^{RA} - 1) + 1) \bmod N_{sc}^{RA}$$

$$f(-1) = 0$$

where  $\tilde{n}_{SC}^{RA}(0) = n_{init} \bmod N_{sc}^{RA}$  with  $n_{init}$  being the subcarrier selected by the MAC layer from  $\{0, 1, \dots, N_{sc}^{NPRACH} - 1\}$ , and the pseudo random sequence  $c(n)$  is given by clause 7.2. The pseudo random sequence generator shall be initialised with  $c_{init} = N_{ID}^{Ncell}$ .

- if  $G = 3, P = 6$  for preamble formats 0-a, 1-a, as described in Table 10.1.6.1-2:

$$\tilde{n}_{SC}^{RA}(i) = \begin{cases} (\tilde{n}_{SC}^{RA}(0) + f(i/3)) \bmod N_{sc}^{RA} & i \bmod 6 = 0, 3 \text{ and } i > 0 \\ \tilde{n}_{SC}^{RA}(i-1) + 1 & i \bmod 6 = 1 \text{ and } \tilde{n}_{SC}^{RA}(i-1) = 0, 2, 4, 6, 8, 10 \\ \tilde{n}_{SC}^{RA}(i-1) - 1 & i \bmod 6 = 2 \text{ and } \tilde{n}_{SC}^{RA}(i-1) = 0, 2, 4, 6, 8, 10 \\ \tilde{n}_{SC}^{RA}(i-1) - 1 & i \bmod 6 = 1 \text{ and } \tilde{n}_{SC}^{RA}(i-1) = 1, 3, 5, 7, 9, 11 \\ \tilde{n}_{SC}^{RA}(i-1) + 1 & i \bmod 6 = 2 \text{ and } \tilde{n}_{SC}^{RA}(i-1) = 1, 3, 5, 7, 9, 11 \\ \tilde{n}_{SC}^{RA}(i-1) + 6 & i \bmod 6 = 4 \text{ and } \tilde{n}_{SC}^{RA}(i-1) = 0, 1, 2, 3, 4, 5 \\ \tilde{n}_{SC}^{RA}(i-1) - 6 & i \bmod 6 = 5 \text{ and } \tilde{n}_{SC}^{RA}(i-1) = 0, 1, 2, 3, 4, 5 \\ \tilde{n}_{SC}^{RA}(i-1) - 6 & i \bmod 6 = 4 \text{ and } \tilde{n}_{SC}^{RA}(i-1) = 6, 7, 8, 9, 10, 11 \\ \tilde{n}_{SC}^{RA}(i-1) + 6 & i \bmod 6 = 5 \text{ and } \tilde{n}_{SC}^{RA}(i-1) = 6, 7, 8, 9, 10, 11 \end{cases}$$

$$f(t) = (f(t-1) + (\sum_{n=10t+1}^{10t+9} c(n) 2^{n-(10t+1)}) \bmod (N_{sc}^{RA} - 1) + 1) \bmod N_{sc}^{RA}$$

$$f(-1) = 0$$

where  $\tilde{n}_{SC}^{RA}(0) = n_{init} \bmod N_{sc}^{RA}$  with  $n_{init}$  being the subcarrier selected by the MAC layer from  $\{0, 1, \dots, N_{sc}^{NPRACH} - 1\}$ , and the pseudo random sequence  $c(n)$  is given by clause 7.2. The pseudo random sequence generator shall be initialised with  $c_{init} = N_{ID}^{Ncell}$ .

### 10.1.6.2 Baseband signal generation

The time-continuous random-access signal  $s_i(t)$  for symbol group  $i$  is defined by

$$s_i(t) = \beta_{NPRACH} e^{j2\pi(n_{SC}^{RA}(i) + K k_0 + 1/2)\Delta f_{RA}(t - T_{CP})}$$

where  $0 \leq t \leq T_{SEQ} + T_{CP}$ ,  $\beta_{NPRACH}$  is an amplitude scaling factor in order to conform to the transmit power  $P_{NPRACH}$  specified in clause 16.3.1 in TS 36.213 [4],  $k_0 = -N_{sc}^{UL}/2$ ,  $K = \Delta f / \Delta f_{RA}$  accounts for the difference in subcarrier spacing between the random access preamble and uplink data transmission, and the location in the frequency domain controlled by the parameter  $n_{SC}^{RA}(i)$  is derived from clause 10.1.6.1. The variable  $\Delta f_{RA}$  is given by Table 10.1.6.2-1.

**Table 10.1.6.2-1: Random access baseband parameters**

| Preamble format | $\Delta f_{RA}$        |                        |
|-----------------|------------------------|------------------------|
|                 | Frame Structure Type 1 | Frame Structure Type 2 |
| 0, 1            | 3.75 kHz               |                        |
| 0-a, 1-a        |                        | 3.75 kHz               |
| 2               | 1.25 kHz               | 3.75 kHz               |

### 10.1.7 Modulation and upconversion

Modulation and upconversion to the carrier frequency of the complex-valued baseband signal or the complex-valued NPRACH baseband signal is shown in Figure 5.8-1. The filtering required prior to transmission is defined by the requirements in TS 36.101 [7].

## 10.2 Downlink

### 10.2.1 Overview

#### 10.2.1.1 Physical channels

A downlink narrowband physical channel corresponds to a set of resource elements carrying information originating from higher layers and is the interface defined between TS 36.212 [3] and the present document TS 36.211.

The following downlink physical channels are defined:

- Narrowband Physical Downlink Shared Channel, NPDSCH

- Narrowband Physical Broadcast Channel, NPBCH
- Narrowband Physical Downlink Control Channel, NPDCCH

### 10.2.1.2 Physical signals

A downlink narrowband physical signal corresponds to a set of resource elements used by the physical layer but does not carry information originating from higher layers. The following downlink physical signals are defined:

- Narrowband reference signal, NRS
- Narrowband synchronization signal
- Narrowband positioning reference signal, NPRS
- Narrowband wake up signal, NWUS

## 10.2.2 Slot structure and physical resource elements

### 10.2.2.1 Resource grid

The transmitted signal on one antenna port in each slot is described by a resource grid of size one resource block as defined in clause 6.2.3.

Only  $\Delta f = 15$  kHz is supported.

Narrowband positioning reference signals are transmitted on antenna port  $p = 2006$ . The channel over which a symbol on antenna port  $p = 2006$  is conveyed can be inferred from the channel over which another symbol on the same antenna port is conveyed only within  $M$  consecutive subframes where

- if the higher layer parameter *nprsBitmap* is configured,  $M$  equals the length of the *nprsBitmap*;
- if the higher layer parameter *nprsBitmap* is not configured,  $M = N_{\text{NPRS}}$  where  $N_{\text{NPRS}}$  is configured by higher layers.

### 10.2.2.2 Resource elements

Resource elements are defined according to clause 6.2.2.

### 10.2.2.3 Guard period for half-duplex FDD operation

Only type-B half-duplex FDD operation is supported.

### 10.2.2.4 Guard period for TDD operation

For frame structure type 2, if a NB-IoT UE is configured with higher layer parameter *twoHARQ-ProcessesConfig*, a guard period is created by the UE by

- not receiving the first part of the first OFDM symbol of a downlink subframe immediately following an uplink subframe from the same UE for 15-kHz subcarrier spacing on an NB-IoT carrier for which higher-layer parameter *operationModeInfo* indicates *guardband* or *standalone*, or higher-layer parameter *inbandCarrierInfo* is not present.

## 10.2.3 Narrowband physical downlink shared channel

### 10.2.3.1 Scrambling

Scrambling shall be done according to clause 6.3.1. If the NPDSCH is carrying the BCCH, the scrambling sequence generator shall be initialised with  $c_{\text{init}} = n_{\text{RNTI}} \cdot 2^{15} + (N_{\text{ID}}^{\text{Ncell}} + 1)((n_f \bmod 61) + 1)$ . Otherwise, the scrambling sequence

generator shall be initialised with  $c_{\text{init}} = n_{\text{RNTI}} \cdot 2^{14} + n_f \bmod 2 \cdot 2^{13} + \lfloor n_s/2 \rfloor \cdot 2^9 + N_{\text{ID}}^{\text{Ncell}}$  where  $n_s$  is the first slot of the transmission of the codeword.

In case of NPDSCH repetitions and the NPDSCH carrying the BCCH, the scrambling sequence generator shall be reinitialized according to the expression above for each repetition.

In case of NPDSCH repetitions and the NPDSCH is not carrying the BCCH, the scrambling sequence generator shall be reinitialized according to the expression above after every  $\min(M_{\text{rep}}^{\text{NPDSCH}}, 4)$  transmission of the codeword with  $n_s$  and  $n_f$  set to the first slot and the frame, respectively, used for the transmission of the repetition.

### 10.2.3.2 Modulation

Modulation shall be done according to clause 6.3.2 using one of the modulation schemes in Table 10.2.3-1

**Table 10.2.3-1: Modulation schemes**

| Physical channel | Modulation schemes |
|------------------|--------------------|
| NPDSCH           | QPSK, 16QAM        |

### 10.2.3.3 Layer mapping and precoding

Layer mapping and precoding shall be done according to clause 6.6.3 using the same set of antenna ports as the NPBCH.

### 10.2.3.4 Mapping to resource elements

Each NPDSCH codeword can be mapped to one or more than one subframes,  $N_{\text{SF}}$ , as given by clause 16.4.1.3 of TS 36.213 [4], each of which shall be transmitted  $M_{\text{rep}}^{\text{NPDSCH}}$  times.

For each of the antenna ports used for transmission of the physical channel, the block of complex-valued symbols  $y^{(p)}(0), \dots, y^{(p)}(M_{\text{symb}}^{\text{ap}} - 1)$  shall be mapped to resource elements  $(k, l)$  which meet all of the following criteria in the current subframe:

- the subframe is not used for transmission of NPBCH, NPSS, or NSSS, and
- except in a special subframe when  $M_{\text{rep}}^{\text{NPDSCH}} > 1$ , they are assumed by the UE not to be used for NRS, and
- they are not overlapping with resource elements used for CRS as defined in clause 6 (if any), and
- the index  $l$  in the first slot in a subframe fulfils  $l \geq l_{\text{DataStart}}$  where  $l_{\text{DataStart}}$  is given by clause 16.4.1.4 of TS 36.213 [4], and
- in addition, for frame structure type 2
  - in a special subframe, if  $M_{\text{rep}}^{\text{NPDSCH}} = 1$ , they are in DwPTS
  - in a special subframe, if  $M_{\text{rep}}^{\text{NPDSCH}} > 1$ , they are not NRS locations in subframes which are not special subframes.

The mapping of  $y^{(p)}(0), \dots, y^{(p)}(M_{\text{symb}}^{\text{ap}} - 1)$  in sequence starting with  $y^{(p)}(0)$  to resource elements  $(k, l)$  on antenna port  $p$  meeting the criteria above shall be in increasing order of first the index  $k$  and then the index  $l$ , starting with the first slot and ending with the second slot in a subframe. For NPDSCH not carrying BCCH, after mapping to a subframe, the subframe shall be repeated for  $\min(M_{\text{rep}}^{\text{NPDSCH}}, 4) - 1$  additional subframes, before continuing the mapping of  $y^{(p)}(\cdot)$  to the following subframe.

The resource elements in a special subframe that are not part of DwPTS are counted but not used in the mapping if  $M_{\text{rep}}^{\text{NPDSCH}} > 1$ . When  $l = N_{\text{sy mb}}^{\text{DL}} - 5, N_{\text{sy mb}}^{\text{DL}} - 4$ , the resource elements in a special subframe assumed by the UE for NRSs are counted but not used in the mapping if  $M_{\text{rep}}^{\text{NPDSCH}} > 1$ .

For frame structure type 1,

- for NPDSCH associated with C-RNTI when *interferenceRandomisationConfig* is used according to [9], or
- for NPDSCH associated with RA-RNTI, TC-RNTI or P-RNTI and transmitted in an NB-IoT carrier configured by *SystemInformationBlockType22-NB*, or
- for NPDSCH associated with C-RNTI in an NB-IoT carrier configured by *SystemInformationBlockType22-NB* when *RadioResourceConfigDedicted-NB* is not configured by higher layer, or
- for NPDSCH associated with PUR-RNTI/G-RNTI/ SC-RNTI, or

for frame structure type 2,

- for NPDSCH not carrying the BCCH,

define  $y_{n_f, n_s}^{(p)}(0), \dots, y_{n_f, n_s}^{(p)}(S-1)$  as the block of complex-valued symbols mapped to subframe number  $\lfloor n_s/2 \rfloor$  and radio frame number  $n_f$ . Each complex-valued symbol  $y_{n_f, n_s}^{(p)}(i)$  shall be multiplied with  $\theta_{n_f, n_s}(i)$  before its transmission, with

$$\theta_{n_f, n_s}(i) = \begin{cases} 1, & \text{if } c_{n_f, n_s}(2i) = 0 \text{ and } c_{n_f, n_s}(2i+1) = 0 \\ -1, & \text{if } c_{n_f, n_s}(2i) = 0 \text{ and } c_{n_f, n_s}(2i+1) = 1 \\ j, & \text{if } c_{n_f, n_s}(2i) = 1 \text{ and } c_{n_f, n_s}(2i+1) = 0 \\ -j, & \text{if } c_{n_f, n_s}(2i) = 1 \text{ and } c_{n_f, n_s}(2i+1) = 1 \end{cases}$$

where the scrambling sequence  $c_{n_f, n_s}(j)$ ,  $j = 0, \dots, 2S-1$  is given by clause 7.2 and shall be initialized at the start of each subframe with  $c_{\text{init}} = (n_{\text{RNTI}} + 1)(10n_f + \lfloor n_s/2 \rfloor) \bmod 61 + 1 \cdot 2^9 + N_{\text{ID}}^{\text{Ncell}}$ .

The mapping of  $y^{(p)}(0), \dots, y^{(p)}(M_{\text{sy mb}}^{\text{ap}} - 1)$  is then repeated until  $M_{\text{rep}}^{\text{NPDSCH}} N_{\text{SF}}$  subframes have been transmitted. For frame structure type 2, the resource elements in a special subframe that are not part of DwPTS are counted but not used in the repetition. When  $l = N_{\text{sy mb}}^{\text{DL}} - 5, N_{\text{sy mb}}^{\text{DL}} - 4$ , the resource elements in a special subframe assumed by the UE for NRSs are counted but not used in the repetition.

For NPDSCH carrying BCCH, the  $y^{(p)}((k-1)M_{\text{sy mb}}^{\text{ap}}), \dots, y^{(p)}(kM_{\text{sy mb}}^{\text{ap}} - 1)$  is mapped to  $N_{\text{SF}}$  subframes in sequence and then repeated until  $M_{\text{rep}}^{\text{NPDSCH}} N_{\text{SF}}$  subframes have been transmitted, where

- $k = 2$  for mapping NPDSCH carrying *SystemInformationBlockType1-NB* to subframe #3 for frame structure type 1;
- $k = 1$  otherwise.

The NPDSCH transmission can be configured by higher layers with transmission gaps where the NPDSCH transmission is postponed. There are no gaps in the NPDSCH transmission if  $R_{\text{max}} < N_{\text{gap, threshold}}$  where  $N_{\text{gap, threshold}}$  is given by the higher layer parameter *dl-GapThreshold* and  $R_{\text{max}}$  is given by [4]. The gap starting frame and subframe is given by  $(10n_f + \lfloor n_s/2 \rfloor) \bmod N_{\text{gap, period}} = 0$  where the gap periodicity,  $N_{\text{gap, period}}$ , is given by the higher layer parameter *dl-GapPeriodicity*. The gap duration in number of subframes is given by  $N_{\text{gap, duration}} = N_{\text{gap, coeff}} N_{\text{gap, period}}$ , where  $N_{\text{gap, coeff}}$  is given by the higher layer parameter *dl-GapDurationCoeff*. For NPDSCH carrying the BCCH there are no gaps in the transmission.

The UE shall not expect NPDSCH in subframe  $i$  if it is not a NB-IoT downlink subframe, except for transmissions of NPDSCH carrying *SystemInformationBlockType1-NB* in

- subframes 3 and 4 for frame structure type 1; and

- subframes 0, 4, and 5 for frame structure type 2.

In case of NPDSCH transmissions, in subframes that are not NB-IoT downlink subframes, the NPDSCH transmission is postponed until the next NB-IoT downlink subframe.

If higher layer parameter *resourceReservationConfigDL* is configured, then in case of NPDSCH transmission associated with C-RNTI using UE-specific NPDCCH search space with the Resource reservation field in the DCI set to 1,

- In a subframe that is fully reserved as defined in clause 16.4 in [4], the NPDSCH transmission is postponed until the next NB-IoT downlink subframe that is not fully reserved.
- In a subframe that is partially reserved, the reserved OFDM symbols shall be counted in the NPDSCH mapping but not used for transmission of the NPDSCH.

## 10.2.4 Narrowband physical broadcast channel

### 10.2.4.1 Scrambling

Scrambling shall be done according to clause 6.6.1 with  $M_{\text{bit}}$  denoting the number of bits to be transmitted on the NPBCH.  $M_{\text{bit}}$  equals 1600 for normal cyclic prefix. The scrambling sequence shall be initialised with  $c_{\text{init}} = N_{\text{ID}}^{\text{Ncell}}$  in radio frames fulfilling  $n_f \bmod 64 = 0$ .

### 10.2.4.2 Modulation

Modulation shall be done according to clause 6.6.2 using the modulation scheme in Table 10.2.4.2-1

**Table 10.2.4.2-1: Modulation schemes for NPBCH**

| Physical channel | Modulation schemes |
|------------------|--------------------|
| NPBCH            | QPSK               |

### 10.2.4.3 Layer mapping and precoding

Layer mapping and precoding shall be done according to clause 6.6.3 with  $P \in \{1, 2\}$ . The UE shall assume antenna ports 2000 and 2001 are used for the transmission of the narrowband physical broadcast channel.

### 10.2.4.4 Mapping to resource elements

The block of complex-valued symbols  $y^{(p)}(0), \dots, y^{(p)}(M_{\text{symb}} - 1)$  for each antenna port is transmitted in subframe 0 for frame structure type 1 or subframe 9 for frame structure type 2 during 64 consecutive radio frames starting in each radio frame fulfilling  $n_f \bmod 64 = 0$ . The quantity  $M_{\text{symb}} = 800$  for normal cyclic prefix. Define  $y_f^{(p)}(0), \dots, y_f^{(p)}(K - 1)$  as the block of complex-valued symbols to be transmitted in subframe 0 for frame structure type 1 or subframe 9 for frame structure type 2 of radio frame  $f = n_f \bmod 64$ , as  $y_f^{(p)}(i) = \theta_f(i) y^{(p)}(K \lfloor f/8 \rfloor + i)$ ,  $i = 0, \dots, 99$  with  $K = 100$  for normal cyclic prefix, and

$$\theta_f(i) = \begin{cases} 1, & \text{if } c_f(2i) = 0 \text{ and } c_f(2i + 1) = 0 \\ -1, & \text{if } c_f(2i) = 0 \text{ and } c_f(2i + 1) = 1 \\ j, & \text{if } c_f(2i) = 1 \text{ and } c_f(2i + 1) = 0 \\ -j, & \text{if } c_f(2i) = 1 \text{ and } c_f(2i + 1) = 1 \end{cases}$$

where the scrambling sequence  $c_f(j)$ ,  $j = 0, \dots, 199$  is given by clause 7.2, and shall be initialized at the start of each

radio frame with  $c_{\text{init}} = (N_{\text{ID}}^{\text{Ncell}} + 1)(n_f \bmod 8 + 1)^3 \cdot 2^9 + N_{\text{ID}}^{\text{Ncell}}$ . The block of complex-valued symbols

$y_f^{(p)}(0), \dots, y_f^{(p)}(K - 1)$  shall be mapped in sequence starting with  $y_f^{(p)}(0)$  to resource elements  $(k, l)$ . The mapping to

resource elements  $(k, l)$  not reserved for transmission of reference signals shall be in increasing order of first the index  $k$ , then the index  $l$ . The first three OFDM symbols in a subframe shall not be used in the mapping process.

For the purpose of the mapping, the UE shall assume cell-specific reference signals for antenna ports 0-3 and narrowband reference signals for antenna ports 2000 and 2001 being present irrespective of the actual configuration. The frequency shift of the cell-specific reference signals shall be calculated by replacing  $N_{ID}^{cell}$  with  $N_{ID}^{Ncell}$  in the calculation of  $v_{shift}$  in clause 6.10.1.2.

## 10.2.5 Narrowband physical downlink control channel

### 10.2.5.1 NPDCCH formats

The narrowband physical downlink control channel carries control information. A narrowband physical control channel is transmitted on an aggregation of one or two consecutive narrowband control channel elements (NCCEs), where a narrowband control channel element corresponds to 6 consecutive subcarriers in a subframe where NCCE 0 occupies subcarriers 0 through 5 and NCCE 1 occupies subcarriers 6 through 11. The NPDCCH supports multiple formats as listed in Table 10.2.5.1-1. For NPDCCH format 1, both NCCEs belong to the same subframe.

One or two NPDCCHs can be transmitted in a subframe.

**Table 10.2.5.1-1: Supported NPDCCH formats**

| NPDCCH format | Number of NCCEs |
|---------------|-----------------|
| 0             | 1               |
| 1             | 2               |

### 10.2.5.2 Scrambling

Scrambling shall be done according to clause 6.8.2. The scrambling sequence shall be initialised at the start of subframe  $k_0$  according to [4] Clause 16.6 and after every 4<sup>th</sup> NPDCCH subframe with  $c_{init} = \lfloor n_s / 2 \rfloor 2^9 + N_{ID}^{Ncell}$  where  $n_s$  is the first slot of the NPDCCH subframe in which scrambling is (re-)initialized.

### 10.2.5.3 Modulation

Modulation shall be done according to clause 6.8.3 using the modulation scheme in Table 10.2.5.3-1

**Table 10.2.5.3-1: Modulation schemes**

| Physical channel | Modulation schemes |
|------------------|--------------------|
| NPDCCH           | QPSK               |

### 10.2.5.4 Layer mapping and precoding

Layer mapping and precoding shall be done according to clause 6.6.3 using the same set of antenna ports as the NPBCH.

### 10.2.5.5 Mapping to resource elements

The block of complex-valued symbols  $y(0), \dots, y(M_{\text{symb}} - 1)$  shall be mapped in sequence starting with  $y(0)$  to resource elements  $(k, l)$  on the associated antenna port which meet all of the following criteria:

- they are part of the NCCE(s) assigned for the NPDCCH transmission, and
- they are not used for transmission of NPBCH, NPSS, or NSSS, and
- except in a special subframe when NPDCCH is transmitted in more than one subframe, they are assumed by the UE not to be used for NRS, and

- they are not overlapping with resource elements used for CRS as defined in clause 6 (if any), and
- the index  $l$  in the first slot in a subframe fulfils  $l \geq l_{\text{NPDCCHStar } t}$  where  $l_{\text{NPDCCHStar } t}$  is given by clause 16.6.1 of TS 36.213 [4],
- in addition, for frame structure Type 2,
  - in a special subframe where the NPDCCH is transmitted in one subframe, they are in DwPTS
  - in a special subframe where the NPDCCH is transmitted in more than one subframe, they are not NRS locations when the subframe is not a special subframe.

The mapping to resource elements  $(k, l)$  on antenna port  $p$  meeting the criteria above shall be in increasing order of first the index  $k$  and then the index  $l$ , starting with the first slot and ending with the second slot in a subframe. Denote  $y_{n_f, n_s}(0), \dots, y_{n_f, n_s}(T-1)$  as the complex-valued symbols that are mapped to resource elements meeting the criteria above in subframe  $\lfloor n_s/2 \rfloor$ , with the insertion of <NIL> elements in the locations of resource elements which are not part of the NCCE(s) assigned for the NPDCCH transmission.

If the NPDCCH is transmitted in more than one subframe, the resource elements in a special subframe that are not part of DwPTS are counted but not used in the mapping. When  $l = N_{\text{symbol}}^{\text{DL}} - 5, N_{\text{symbol}}^{\text{DL}} - 4$ , the resource elements in a special subframe assumed by the UE for NRSs are counted but not used in the mapping if the NPDCCH is transmitted in more than one subframe.

For frame structure type 1,

- for NPDCCH associated with RA-RNTI, TC-RNTI or
- for P-RNTI and transmitted in an NB-IoT carrier configured by *SystemInformationBlockType22-NB*, or
- for NPDCCH associated with C-RNTI in an NB-IoT carrier configured by *SystemInformationBlockType22-NB* when *RadioResourceConfigDedicated-NB* is not configured by higher layer, or
- for NPDCCH associated with PUR-RNTI/G-RNTI/ SC-RNTI, or
- for NPDCCH associated with C-RNTI or SPS C-RNTI when *interferenceRandomisationConfig* is used according to [9], or

for frame structure type 2,

each complex-valued symbol  $y_{n_f, n_s}(i), i = 0, \dots, T-1$  shall be multiplied with  $\theta_{n_f, n_s}(i), i = 0, \dots, T-1$  where

$$\theta_{n_f, n_s}(i) = \begin{cases} 1, & \text{if } c_{n_f, n_s}(2i) = 0 \text{ and } c_{n_f, n_s}(2i+1) = 0 \\ -1, & \text{if } c_{n_f, n_s}(2i) = 0 \text{ and } c_{n_f, n_s}(2i+1) = 1 \\ j, & \text{if } c_{n_f, n_s}(2i) = 1 \text{ and } c_{n_f, n_s}(2i+1) = 0 \\ -j, & \text{if } c_{n_f, n_s}(2i) = 1 \text{ and } c_{n_f, n_s}(2i+1) = 1 \end{cases}$$

where the scrambling sequence  $c_{n_f, n_s}(j), j = 0, \dots, 2T-1$  is given by clause 7.2 and shall be initialized at the start of each subframe with  $c_{\text{init}} = (N_{\text{ID}}^{\text{Ncell}} + 1) \left( (10 n_f + \lfloor n_s / 2 \rfloor) \bmod 8192 + 1 \right) 2^9 + N_{\text{ID}}^{\text{Ncell}}$ .

The NPDCCH transmission can be configured by higher layers with transmissions gaps where the NPDCCH transmission is postponed. The configuration is the same as described for NPDSCH in clause 10.2.3.4.

The UE shall not expect NPDCCH in subframe  $i$  if it is not a NB-IoT downlink subframe. In case of NPDCCH transmissions, in subframes that are not NB-IoT downlink subframes, the NPDCCH transmission is postponed until the next NB-IoT downlink subframe.

If higher layer parameter *resourceReservationConfigDL* is configured, then in case of NPDCCH transmission associated with C-RNTI or SPS C-RNTI using UE-specific NPDCCH search space,

- In a subframe that is fully reserved as defined in clause 16.4 in [4], the NPDCCH transmission is postponed until the next NB-IoT downlink subframe that is not fully reserved.
- In a subframe that is partially reserved, the reserved OFDM symbols shall be counted in the NPDCCH mapping but not used for transmission of the NPDCCH.

## 10.2.6 Narrowband reference signal (NRS)

Before a UE obtains *operationModeInfo*:

- If frame structure type 1 is used, the UE may assume narrowband reference signals (NRSs) are transmitted in subframes #0 and #4 and in subframes #9 not containing NSSS.
- If frame structure type 2 is used, the UE may assume narrowband reference signals (NRSs) are transmitted in subframes #9 and in subframes #0 not containing NSSS.

On an NB-IoT carrier for which a UE receives higher-layer parameter *operationModeInfo* indicating *guardband* or *standalone*.

- If frame structure type 1 is used, before the UE obtains *SystemInformationBlockType1-NB*, the UE may assume narrowband reference signals are transmitted in subframes #0, #1, #3, #4 and in subframes #9 not containing NSSS.
- If frame structure type 2 is used, before the UE obtains *SystemInformationBlockType1-NB*, the UE may assume narrowband reference signals are transmitted in subframes #9, and in subframes #0 not containing NSSS, and in subframes #4 if subframes #4 is configured for *SystemInformationBlockType1-NB* transmissions.
- If frame structure type 1 is used, after the UE obtains *SystemInformationBlockType1-NB*, the UE may assume narrowband reference signals are transmitted in subframes #0, #1, #3, #4, subframes #9 not containing NSSS, and in NB-IoT downlink subframes.
- If frame structure type 2 is used, after the UE obtains *SystemInformationBlockType1-NB*, the UE may assume narrowband reference signals are transmitted in subframes #9, subframes #0 not containing NSSS, in subframes #4 if subframes #4 is configured for *SystemInformationBlockType1-NB* transmissions, and in NB-IoT downlink subframes.

On an NB-IoT carrier for *SystemInformationBlockType1-NB* for which *sib1-carrierInfo-NB* indicates *non-anchor* for frame structure type 2, before the UE obtains *SystemInformationBlockType1-NB*, the UE may assume narrowband reference signals are transmitted in subframes #0 and #5. After the UE obtains *SystemInformationBlockType1-NB*, the UE may assume narrowband reference signals are transmitted in subframes #0, #5, and in NB-IoT downlink subframes indicated by *tdd-SI-SubframesBitmap*.

On an NB-IoT carrier for which *DL-CarrierConfigCommon-NB* is present and no *inbandCarrierInfo* is present.

- If frame structure type 1 is used and when an NB-IoT UE is configured by higher layers to decode NPDCCH with CRC scrambled by the P-RNTI and higher-layer indicates *nrs-NonAnchorConfig* is enabled, the UE first determines the starting subframe of NPDCCH search space associated with NRS transmission according to [10].
  - If higher-layer *nB* is configured as *fourT*, the UE may assume NRSs are transmitted in the 10<sup>th</sup> NB-IoT DL subframe before the determined starting subframe of NPDCCH search space.
  - If higher-layer *nB* is configured as *twoT*, the UE may assume NRSs are transmitted in the 9<sup>th</sup> and 10<sup>th</sup> NB-IoT DL subframes before the determined starting subframe of NPDCCH search space.
  - If higher-layer *nB* is configured as *oneT*, the UE may assume NRSs are transmitted in the 6<sup>th</sup>, 7<sup>th</sup>, 8<sup>th</sup>, 9<sup>th</sup> and 10<sup>th</sup> NB-IoT DL subframes before the determined starting subframe of NPDCCH search space.
  - For other *nB* values, the UE may assume NRSs are transmitted in 10 NB-IoT DL subframes before the determined starting subframe of NPDCCH search space.
- When an NB-IoT UE is configured by higher layers to decode NPDCCH with CRC scrambled by the P-RNTI, the UE may assume NRSs are transmitted in the NPDCCH candidate where the UE finds a DCI with CRC scrambled by the P-RNTI. The UE may also assume NRSs are transmitted in 10 NB-IoT DL subframes before and in 4 NB-IoT DL subframes after the NPDCCH candidate where the UE finds a DCI with CRC scrambled by the P-RNTI, where NB-IoT DL subframes without NRS are not counted. If the DCI with CRC scrambled by the

P-RNTI schedules a NPDSCH, the UE may assume NRSs are transmitted in the NB-IoT DL subframes carrying the NPDSCH as well as in 4 NB-IoT DL subframes before and after the scheduled NPDSCH, where NB-IoT DL subframes without NRS are not counted.

- During the window controlled by higher layers where the UE shall attempt to decode the NPDCCH with DCI scrambled by RA-RNTI (see [8], clause 5.1.4), the UE may assume NRSs are transmitted in the Type-2 CSS configured by higher layers, as well as in 10 NB-IoT DL subframes before and in 4 NB-IoT DL subframes after each Type-2 CSS, where NB-IoT DL subframes without NRS are not counted. If a DCI scrambled by the RA-RNTI is detected, the UE may assume NRSs are transmitted in the NPDSCH scheduled by the DCI scrambled by the RA-RNTI, as well as in 4 NB-IoT DL subframes before and after the scheduled NPDSCH, where NB-IoT DL subframes without NRS are not counted. In addition, when the UE attempts to decode a DCI with CRC scrambled by the RA-RNTI as well as receiving the NPDSCH scheduled by the DCI scrambled by the RA-RNTI, the UE may assume NRSs are transmitted in subframes #0, #1, #3, #4 and #9.
- During random access procedure, when an NB-IoT UE is configured by higher layers to decode NPDCCH with CRC scrambled by the temporary C-RNTI and/or the C-RNTI, before the DCI scrambled by temporary C-RNTI and/or C-RNTI is detected, the UE may assume NRSs are transmitted in the Type-2 CSS configured by higher layers, as well as in 10 NB-IoT DL subframes before the start of each Type-2 CSS and in 4 NB-IoT DL subframes after the end of each Type-2 CSS until the mac-ContentionResolutionTimer expires, where NB-IoT DL subframes without NRS are not counted. If a DCI scrambled by the temporary C-RNTI or C-RNTI is detected, the UE may assume NRSs are transmitted in the NPDSCH scheduled by the DCI scrambled by the temporary C-RNTI or C-RNTI as well as in 4 NB-IoT DL subframes before and after the scheduled NPDSCH, where NB-IoT DL subframes without NRS are not counted.
- An NB-IoT UE may assume NRSs are transmitted in NB-IoT DL subframes that are used for Type1A-NPDCCH common search space, and Type2A-NPDCCH common search space, as well as in 10 NB-IoT DL subframes prior and in 4 NB-IoT DL subframes after each Type1A-NPDCCH common search space and Type2A-NPDCCH common search space. A UE may assume NRSs are transmitted in NB-IoT DL subframes carrying NPDSCH scheduled by DCI CRC scrambled by G-RNTI or SC-RNTI as well as 4 NB-IoT DL subframes prior and after the scheduled NPDSCH, where NB-IoT DL subframes without NRS are not counted.
- In other cases, if frame structure typ1 is used, the UE may assume NRSs are transmitted in subframes #0, #1, #3, #4, #9, and in NB-IoT downlink subframes and shall not expect NRSs in other downlink subframes.

On an NB-IoT carrier for which a UE receives higher-layer parameter *operationModeInfo* indicating *inband-SamePCI* or *inband-DifferentPCI*.

- If frame structure type 1 is used, before the UE obtains *SystemInformationBlockType1-NB*, the UE may assume narrowband reference signals are transmitted in subframes #0, #4 and in subframes #9 not containing NSSS, and in subframes #3 which contain *SystemInformationBlockType1-NB* when *additionalTransmissionSIB1* is configured as TRUE.
- If frame structure type 2 is used, before the UE obtains *SystemInformationBlockType1-NB*, the UE may assume narrowband reference signals are transmitted in subframes #9, and in subframes #0 not containing NSSS, and in subframes #4 if subframes #4 is configured for *SystemInformationBlockType1-NB* transmissions.
- If frame structure type 1 is used, after the UE obtains *SystemInformationBlockType1-NB*, the UE may assume narrowband reference signals are transmitted in subframes #0, #4, subframes #9 not containing NSSS, subframes #3 which contain *SystemInformationBlockType1-NB* when *additionalTransmissionSIB1* is configured as TRUE, and in NB-IoT downlink subframes.
- If frame structure type 2 is used, after the UE obtains *SystemInformationBlockType1-NB*, the UE may assume narrowband reference signals are transmitted in subframes #9, subframes #0 not containing NSSS, in subframes #4 if subframes #4 is configured for *SystemInformationBlockType1-NB* transmissions, and in NB-IoT downlink subframes

On an NB-IoT carrier for which *DL-CarrierConfigCommon-NB* is present and *inbandCarrierInfo* is present:

- If frame structure type 1 is used, when an NB-IoT UE is configured by higher layers to decode NPDCCH with CRC scrambled by the P-RNTI and higher-layer indicates *nrs-NonAnchorConfig* is enabled, the UE first determines the starting subframe of NPDCCH search space associated with NRS transmission according to [10].
- If higher-layer *nB* is configured as *fourT*, the UE may assume NRSs are transmitted in the 10<sup>th</sup> NB-IoT DL subframe before the determined starting subframe of NPDCCH search space.

- If higher-layer  $nB$  is configured as *twoT*, the UE may assume NRSs are transmitted in 9<sup>th</sup> and 10<sup>th</sup> NB-IoT DL subframes before the determined starting subframe of NPDCCH search space.
- If higher-layer  $nB$  is configured as *oneT*, the UE may assume NRSs are transmitted in 6<sup>th</sup>, 7<sup>th</sup>, 8<sup>th</sup>, 9<sup>th</sup> and 10<sup>th</sup> NB-IoT DL subframes before the determined starting subframe of NPDCCH search space.
- For other  $nB$  values, the UE may assume NRSs are transmitted in 10 NB-IoT DL subframes before the determined starting subframe of NPDCCH search space.
- When an NB-IoT UE is configured by higher layers to decode NPDCCH with CRC scrambled by the P-RNTI, the UE may assume NRSs are transmitted in the NPDCCH candidate where the UE finds a DCI with CRC scrambled by the P-RNTI. The UE may also assume NRSs are transmitted in 10 NB-IoT DL subframes before and in 4 NB-IoT DL subframes after the NPDCCH candidate, where NB-IoT DL subframes without NRS are not counted. If the DCI with CRC scrambled by the P-RNTI schedules a NPDSCH, the UE may assume NRSs are transmitted in the NB-IoT DL subframes carrying the NPDSCH as well as 4 NB-IoT DL subframes before and after the scheduled NPDSCH, where NB-IoT DL subframes without NRS are not counted.
- During the window controlled by higher layers where the UE shall attempt to decode the NPDCCH with DCI scrambled by RA-RNTI (see [8], clause 5.1.4), the UE may assume NRSs are transmitted in the Type-2 CSS configured by higher layers, as well as in 10 NB-IoT DL subframes before and in 4 NB-IoT DL subframes after each Type-2 CSS, where NB-IoT DL subframes without NRS are not counted. If a DCI scrambled by the RA-RNTI is detected, the UE may assume NRSs are transmitted in the NPDSCH scheduled by the DCI scrambled by the RA-RNTI, as well as in 4 NB-IoT DL subframes before and after the scheduled NPDSCH, where NB-IoT DL subframes without NRS are not counted. In addition, when the UE attempts to decode a DCI with CRC scrambled by the RA-RNTI as well as receiving the NPDSCH scheduled by the DCI scrambled by the RA-RNTI, the UE may assume NRSs are transmitted in subframes #0, #4 and #9.
- During random access procedure, when an NB-IoT UE is configured by higher layers to decode NPDCCH with CRC scrambled by the temporary C-RNTI and/or the C-RNTI, before the DCI scrambled by temporary C-RNTI and/or C-RNTI is detected, the UE may assume NRSs are transmitted in the Type-2 CSS configured by higher layers, as well as in 10 NB-IoT DL subframes before the start of each Type-2 CSS and in 4 NB-IoT DL subframes after the end of each Type-2 CSS until the mac-ContentionResolutionTimer expires, where NB-IoT DL subframes without NRS are not counted. If a DCI scrambled by the temporary C-RNTI or C-RNTI is detected, the UE may assume NRSs are transmitted in the NPDSCH scheduled by the DCI scrambled by the temporary C-RNTI or C-RNTI as well as in 4 NB-IoT DL subframes before and after the scheduled NPDSCH, where NB-IoT DL subframes without NRS are not counted.
- An NB-IoT UE may assume NRSs are transmitted in NB-IoT DL subframes that are used for Type1A-NPDCCH common search space, and Type2A-NPDCCH common search space, as well as in 10 NB-IoT DL subframes prior and in 4 NB-IoT DL subframes after each Type1A-NPDCCH common search space and Type2A-NPDCCH common search space, where NB-IoT DL subframes without NRS are not counted. A UE may assume NRSs are transmitted in NB-IoT DL subframes carrying NPDSCH scheduled by DCI CRC scrambled by G-RNTI or SC-RNTI as well as in 4 NB-IoT DL subframes prior and after the scheduled NPDSCH, where NB-IoT DL subframes without NRS are not counted.
- In other cases, if frame structure type 1 is used, the UE may assume NRSs are transmitted in subframes #0, #4, #9, and in NB-IoT downlink subframes and shall not expect NRSs in other downlink subframes.

On an NB-IoT carrier for which *DL-CarrierConfigDedicated-NB* is present and no *inbandCarrierInfo* is present:

- If frame structure type 1 is used, the UE may assume NRSs are transmitted in subframes #0, #1, #3, #4, #9, and in NB-IoT downlink subframes and shall not expect NRSs in other downlink subframes.

On an NB-IoT carrier for which *DL-CarrierConfigDedicated-NB* is present and *inbandCarrierInfo* is present:

- If frame structure type 1 is used, the UE may assume NRSs are transmitted in subframes #0, #4, #9, and in NB-IoT downlink subframes and shall not expect NRSs in other downlink subframes.

An NB-IoT UE may assume NRSs are not transmitted in subframes that are configured by higher layer parameter *nprsBitmap* for narrowband positioning reference signal transmission.

### 10.2.6.1 Sequence generation

The narrowband reference sequence shall be initialised according to clause 6.10.1.1 where  $N_{ID}^{cell}$  is replaced with  $N_{ID}^{Ncell}$ .

### 10.2.6.2 Mapping to resource elements

Narrowband reference signals are transmitted on one or two antenna ports  $p \in \{2000, 2001\}$ .

If the higher layer indicates UE may assume that  $N_{ID}^{cell}$  is equal to  $N_{ID}^{Ncell}$ , UE may assume

- the number of antenna ports for the cell-specific reference signals as defined in clause 6.10.1 is the same as for the narrowband reference signals,
- the antenna ports for cell-specific reference signals  $\{0, 1\}$  are equivalent to antenna ports for narrowband reference signals  $\{2000, 2001\}$ , respectively, and
- the cell-specific reference signals are available in all subframes where the narrowband reference signals are available.

If the higher layer does not indicate UE may assume that  $N_{ID}^{cell}$  is equal to  $N_{ID}^{Ncell}$ , UE may assume

- the number of antenna port for the cell-specific reference signals as defined in clause 6.10.1 is obtained from the higher layer parameter *eutra-NumCRS-Ports*,
- the cell-specific reference signals are available in all subframes where the narrowband reference signals are available, and

the cell-specific frequency shift for cell-specific reference signals as defined in clause 6.10.1.2 is given by  $v_{shift} = N_{ID}^{Ncell} \bmod 6$ .

The reference signal sequence  $r_{l,n_s}(m)$  shall be mapped to complex-valued modulation symbols  $a_{k,l}^{(p)}$  used as reference symbols for antenna port  $p$  in slot  $n_s$  according to

$$a_{k,l}^{(p)} = r_{l,n_s}(m')$$

where

$$\begin{aligned} k &= 6m + (v + v_{shift}) \bmod 6 \\ l &= N_{symb}^{DL} - 2, N_{symb}^{DL} - 1 \\ m &= 0, 1 \\ m' &= m + N_{RB}^{max,DL} - 1 \end{aligned}$$

When frame structure type 2 is used, the following values of  $l$  apply for the generation of NRSs in special subframes

- $l = N_{symb}^{DL} - 5, N_{symb}^{DL} - 4$  in each slot for special subframe configurations  $\{3, 4, 8\}$
- $l = N_{symb}^{DL} - 5, N_{symb}^{DL} - 4$  in the first slot for special subframe configurations  $\{9, 10\}$
- $l = N_{symb}^{DL} - 2, N_{symb}^{DL} - 1$  in the first slot for special subframe configurations  $\{1, 2, 6, 7\}$ .

The variables  $v$  and  $v_{shift}$  define the position in the frequency domain for the different reference signals where  $v$  is given by

$$v = \begin{cases} 0 & \text{if } p = 2000 \text{ and } l \in \{N_{\text{symb}}^{\text{DL}} - 2, N_{\text{symb}}^{\text{DL}} - 5\} \\ 3 & \text{if } p = 2000 \text{ and } l \in \{N_{\text{symb}}^{\text{DL}} - 1, N_{\text{symb}}^{\text{DL}} - 4\} \\ 3 & \text{if } p = 2001 \text{ and } l \in \{N_{\text{symb}}^{\text{DL}} - 2, N_{\text{symb}}^{\text{DL}} - 5\} \\ 0 & \text{if } p = 2001 \text{ and } l \in \{N_{\text{symb}}^{\text{DL}} - 1, N_{\text{symb}}^{\text{DL}} - 4\} \end{cases}$$


The cell-specific frequency shift is given by  $v_{\text{shift}} = N_{\text{ID}}^{\text{Ncell}} \bmod 6$ .

Resource elements  $(k, l)$  used for transmission of narrowband reference signals on any of the antenna ports in a slot shall not be used for any transmission on any other antenna port in the same slot and set to zero.

Narrowband reference signals shall not be transmitted in subframes containing NPSS or NSSS.

For frame structure type 2, narrowband reference signals shall not be transmitted in special subframe for configurations 0 and 5.

Figure 10.2.6.2-1 illustrates the resource elements used for reference signal transmission according to the above definition. The notation  $R_p$  is used to denote a resource element used for reference signal transmission on antenna port  $p$ .

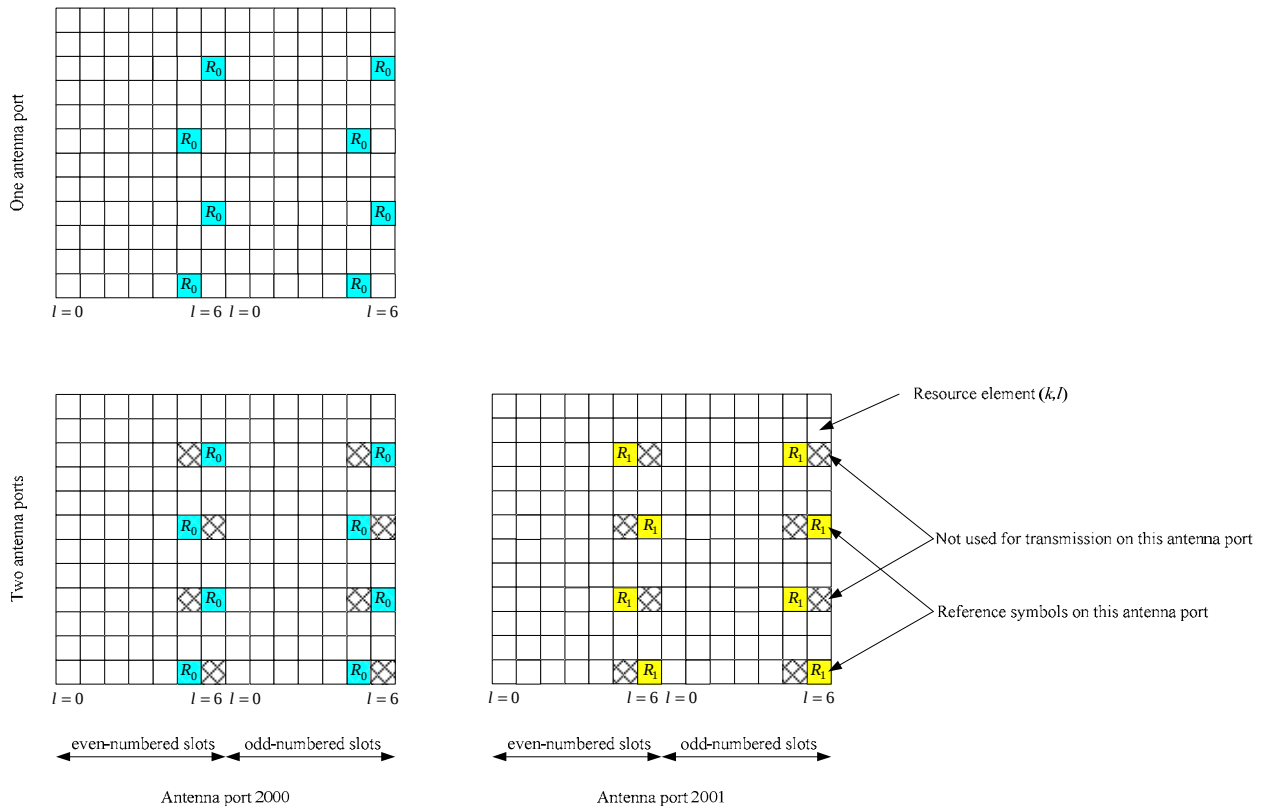

**Figure 10.2.6.2-1. Mapping of downlink narrowband reference signals (normal cyclic prefix)**

## 10.2.6A Narrowband positioning reference signal (NPRS)

Narrowband positioning reference signals (NPRSs) shall only be transmitted in resource blocks in NB-IoT carriers configured for NPRS transmission. In a subframe configured for NPRS transmission, the starting positions of the OFDM symbols configured for NPRS transmission shall be identical to those in a subframe in which all OFDM symbols have the same cyclic prefix length as the OFDM symbols configured for NPRS transmission. NPRS are defined for  $\Delta f = 15$  kHz and normal CP only.

NPRSs are transmitted on antenna port 2006.

### 10.2.6A.1 Sequence generation

The NPRS sequence  $r_{l,n_s}(m)$  is defined by

$$r_{l,n_s}(m) = \frac{1}{\sqrt{2}}(1 - 2 \cdot c(2m)) + j \frac{1}{\sqrt{2}}(1 - 2 \cdot c(2m+1)), \quad m = 0, 1, \dots, 2N_{\text{RB}}^{\text{max,DL}} - 1$$

where  $n_s$  is the slot number within a radio frame,  $l$  is the OFDM symbol number within the slot. The pseudo-random sequence  $c(i)$  is defined in clause 7.2. The pseudo-random sequence generator shall be initialised with

$$c_{\text{init}} = 2^{28} \cdot \lfloor N_{\text{ID}}^{\text{NPRS}} / 512 \rfloor + 2^{10} \cdot (7 \cdot (n_s + 1) + l + 1) \cdot (2 \cdot (N_{\text{ID}}^{\text{NPRS}} \bmod 512) + 1) + 2 \cdot (N_{\text{ID}}^{\text{NPRS}} \bmod 512) + N_{\text{CP}}$$

at the start of each OFDM symbol where  $N_{\text{ID}}^{\text{NPRS}} \in \{0, 1, \dots, 4095\}$  equals  $N_{\text{ID}}^{\text{Ncell}}$  unless configured by higher layers and where  $N_{\text{CP}} = 1$ .

### 10.2.6A.2 Mapping to resource elements

For an NB-IoT carrier which is configured for NPRS transmission, the reference signal sequence  $r_{l,n_s}(m)$  shall be mapped to complex-valued modulation symbols  $a_{k,l}^{(p)}$  used as reference signal for antenna port  $p$  in slot  $n_s$  according to, for Type 1 NPRS:

$$a_{k,l}^{(p)} = r_{l,n_s}(m')$$

or for Type 2 NPRS:

$$a_{k,l}^{(p)} = r_{l,n_s}((m' + 2(n_f \bmod 64)) \bmod 220)$$

according to higher layer configuration, where

- when the higher layer parameter *operationModeInfoNPRS* for the configured NB-IoT carrier is set to in-band

$$\begin{aligned} k &= 6m + (6 - l + v_{\text{shift}}) \bmod 6 \\ l &= \begin{cases} 3, 5, 6 & \text{if } n_s \bmod 2 = 0 \\ 1, 2, 3, 5, 6 & \text{if } n_s \bmod 2 = 1 \text{ and (1 or 2 PBCH antenna ports)} \\ 2, 3, 5, 6 & \text{if } n_s \bmod 2 = 1 \text{ and (4 PBCH antenna ports)} \end{cases} \\ m &= 0, 1 \\ m' &= m + 2 \cdot n_{\text{PRB}}' + N_{\text{RB}}^{\text{max,DL}} - \tilde{n} \end{aligned}$$


where  $n_{\text{PRB}}'$  is signalled by higher layers *nprs-SequenceInfo*, and  $\tilde{n} = 1$  if the higher layer parameter *nprs-SequenceInfo* indicates  $N_{\text{RB}}^{\text{DL}}$  is odd, and  $\tilde{n} = 0$  if the higher layer parameter *nprs-SequenceInfo* indicates  $N_{\text{RB}}^{\text{DL}}$  is even.

- when the higher layer parameter *operationModeInfoNPRS* for the configured NB-IoT carrier is set to standalone or guard-band


$$\begin{aligned} k &= 6m + (6 - l + v_{\text{shift}}) \bmod 6 \\ l &= 0, 1, 2, 3, 4, 5, 6 \\ m &= 0, 1 \\ m' &= m + N_{\text{RB}}^{\text{max,DL}} - 1 \end{aligned}$$

and where  $v_{\text{shift}} = N_{\text{ID}}^{\text{NPRS}} \bmod 6$ . If  $N_{\text{ID}}^{\text{NPRS}}$  is not configured by higher layers,  $N_{\text{ID}}^{\text{NPRS}} = N_{\text{ID}}^{\text{Ncell}}$ . The number of PBCH antenna ports is signalled by higher layers.

If higher layer parameter *nprsBitmap* is not configured, resource elements in OFDM symbols 5 and 6 in each slot shall not be used for transmission of NPRS. If the configured periodicity of Type 1 NPRS is equal to that of Type 2 NPRS, the UE is not expected to be configured with overlapped resource elements between Type 1 NPRS and Type 2 NPRS. Otherwise, a resource element configured for Type 1 NPRS shall not be used for Type 2 NPRS.

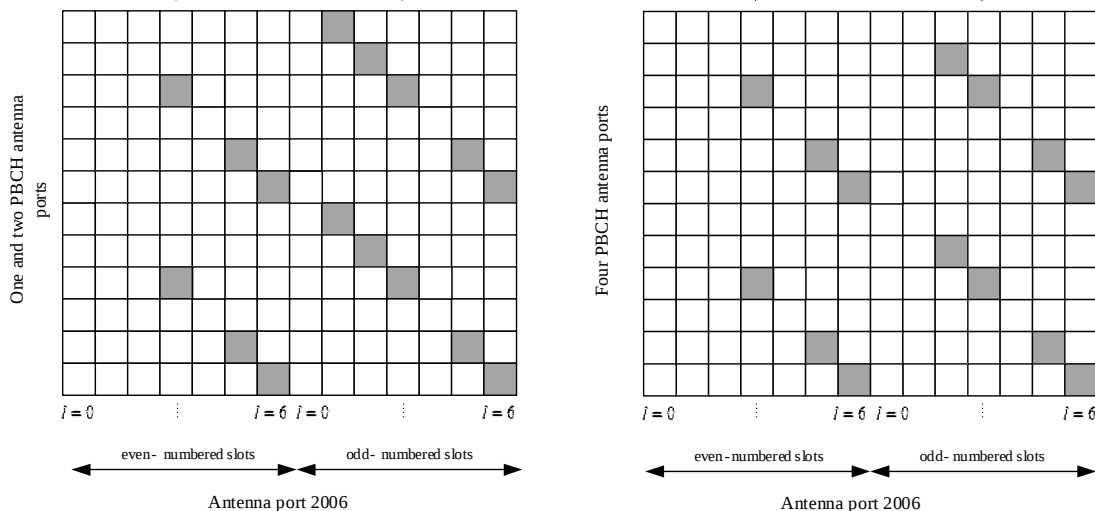

**Figure 10.2.6A.2-1: Mapping of NPRS (*operationModeInfoNPRS* is set to in-band, *nprsBitmap* configured)**

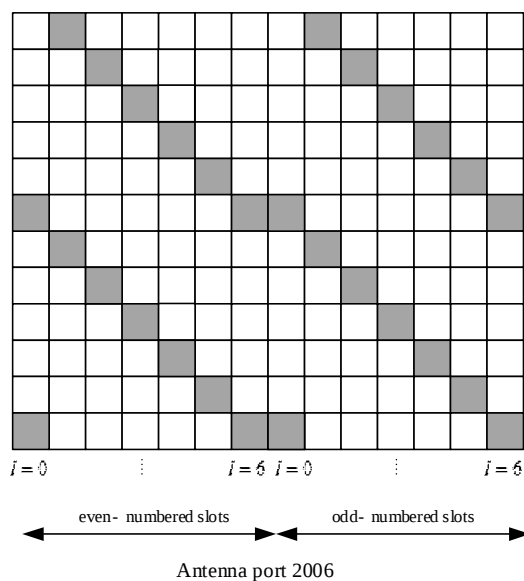

**Figure 10.2.6A.2-2: Mapping of NPRS (*operationModeInfoNPRS* is set to standalone or guard-band, *nprsBitmap* configured)**

### 10.2.6A.3 NPRS subframe configuration

On a NB-IoT DL carrier configured for NPRS transmission, an NB-IoT UE can assume NPRSs are transmitted in DL subframes configured by all higher layer parameters *nprsBitmap*, the NB-IoT carrier-specific subframe configuration period  $T_{\text{NPRS}}$ , the NB-IoT-carrier-specific starting subframe offset  $\alpha_{\text{NPRS}}$ , and the number of consecutive downlink subframes  $N_{\text{NPRS}}$  where NPRS shall be transmitted. If frame structure type 2 is used, the UE shall not assume NPRSs are transmitted in special subframes.

- If  $T_{\text{NPRS}}$ ,  $\alpha_{\text{NPRS}}$ , and  $N_{\text{NPRS}}$  are not configured for an NB-IoT downlink carrier configured for NPRS transmission, an NB-IoT UE shall assume NPRSs are transmitted in downlink subframes configured by higher layer parameter  $nprsBitmap$ .
- If  $nprsBitmap$  is not configured for an NB-IoT downlink carrier configured for NPRS transmission, an NB-IoT UE shall assume NPRSs are transmitted in downlink subframes configured by the higher layer parameters  $T_{\text{NPRS}}$ ,  $\alpha_{\text{NPRS}}$ , and  $N_{\text{NPRS}}$ .
- If the higher layer parameter  $operationModeInfoNPRS$  for the configured NB-IoT carrier is set to in-band, the higher layer parameters  $nprsBitmap$  shall be configured.
- If  $T_{\text{NPRS}}$ ,  $\alpha_{\text{NPRS}}$ , and  $N_{\text{NPRS}}$  are configured, the NPRS instances in the first subframe of the  $N_{\text{NPRS}}$  downlink subframes, shall satisfy  $(10n_f + \lfloor n_s / 2 \rfloor - \alpha_{\text{NPRS}} T_{\text{NPRS}}) \bmod T_{\text{NPRS}} = 0$ .

The NPRSs shall not be mapped to resource elements  $(k, l)$  allocated to resource blocks of NPBCH, NPSS, NSSS, or *SystemInformationBlock-Type1-NB* regardless of their antenna port  $p$ .

## 10.2.6B Narrowband wake up signal (NWUS)

### 10.2.6B.1 Sequence generation

The NWUS sequence  $w(m)$  in subframe  $x = 0, 1, \dots, M - 1$  is defined by

$$w(m) = \theta_{n_f n_s}(m') \cdot e^{-\frac{j\pi u n(n+1)}{131}} e^{\frac{j2\pi g m}{132}}$$

$$m = 0, 1, \dots, 131$$

$$m' = m + 132x$$

$$n = m \bmod 132$$

$$\theta_{n_f n_s}(m') = \begin{cases} 1, & \text{if } c_{n_f n_s}(2m') = 0 \text{ and } c_{n_f n_s}(2m' + 1) = 0 \\ -1, & \text{if } c_{n_f n_s}(2m') = 0 \text{ and } c_{n_f n_s}(2m' + 1) = 1 \\ j, & \text{if } c_{n_f n_s}(2m') = 1 \text{ and } c_{n_f n_s}(2m' + 1) = 0 \\ -j, & \text{if } c_{n_f n_s}(2m') = 1 \text{ and } c_{n_f n_s}(2m' + 1) = 1 \end{cases}$$

$$u = (N_{\text{ID}}^{\text{Ncell}} \bmod 126) + 3$$

where  $M$  is the actual duration of NWUS as defined in [4]. For a UE not configured with group NWUS,  $g = 0$ . For a UE configured with group NWUS,  $g = 14(N_{\text{group}}^{\text{NWUS}} + 1)$  for  $0 \leq N_{\text{group}}^{\text{NWUS}} \leq 7$ , where  $N_{\text{group}}^{\text{NWUS}}$  is determined by the UE group to which the UE is associated as determined by higher layers [10]. In a resource that is not shared with non-group NWUS, the common NWUS sequence shall be determined by  $g = 126$ . In a resource that is shared with non-group NWUS, the common NWUS sequence is determined by higher layers [9].

The scrambling sequence  $c_{n_f n_s}(i)$ ,  $i = 0, 1, \dots, 2 \cdot 132M - 1$  is given by clause 7.2, and shall be initialized at the start of the NWUS with

$$c_{\text{init\_WUS}} = (N_{\text{ID}}^{\text{Ncell}} + 1) \left( \left( 10n_{f,\text{start\_PO}} + \left\lfloor \frac{n_{s,\text{start\_PO}}}{2} \right\rfloor \right) \bmod 2048 + 1 \right) 2^9 + N_{\text{ID}}^{\text{Ncell}} + N_{\text{ID}}^{\text{resource}} \cdot 2^{29}$$

where  $n_{f,\text{start\_PO}}$  is the first frame of the first PO to which the NWUS is associated,  $n_{s,\text{start\_PO}}$  is the first slot of the first PO to which the NWUS is associated and  $N_{\text{ID}}^{\text{resource}}$  indicates the group NWUS resource to which the UE is associated. For a UE not configured with group NWUS,  $N_{\text{ID}}^{\text{resource}} = 0$ , whereas for a UE configured with group NWUS,  $N_{\text{ID}}^{\text{resource}}$  is determined by higher layers [10].

### 10.2.6B.2 Mapping to resource elements

The same antenna port shall be used for all symbols of the NWUS within a subframe. The UE shall not assume that the NWUS is transmitted on the same antenna port as any of the downlink reference signals or synchronization signals. If only one NRS port is configured by the eNB, the UE may assume the transmission of all NWUS subframes is using the

same antenna port; otherwise, the UE may assume the same antenna port is used for NWUS transmission in DL subframes  $w_0+2n$  and  $w_0+2n+1$ , where  $w_0$  is the first DL subframe of the NWUS transmission as specified in [4], and  $n=0,1,\dots$

The NWUS sequence is mapped to the set of subframes in the actual NWUS duration as defined in [4], where in a subframe #4 in which *SystemInformationBlockType1-NB* is transmitted or a subframe in which an SI message is transmitted, the subframe is counted in the NWUS mapping but not used for transmission of NWUS. On an NB-IoT carrier for which a UE receives higher-layer parameter *operationModeInfo* indicating *inband-SamePCI*, *inband-DifferentPCI*, *guardband* or *standalone* or on an NB-IoT carrier for which *DL-CarrierConfigCommon-NB* is present, the NWUS sequence  $w(m)$  shall be mapped to resource elements  $(k, l)$  in sequence, starting with  $w(0)$  in increasing order of first the index  $k = 0, 1, \dots, N_{sc}^{RB} - 1$ , over the 12 assigned subcarriers and then the index  $l = 3, 4, \dots, 2N_{sym}^{DL} - 1$  in each subframe in which NWUS is transmitted.

Additionally, on an NB-IoT carrier for which a UE receives higher-layer parameter *operationModeInfo* indicating *guardband* or *standalone*, or on an NB-IoT carrier for which *DL-CarrierConfigCommon-NB* is present and no *inbandCarrierInfo* is present, the resource mapping for the first three OFDM symbols in the subframe is performed as follows:

- The resource element  $(k, 7)$  is mapped to resource element  $(k, 0)$  of every index  $k$  over 12 assigned subcarriers
- The resource element  $(k, 8)$  is mapped to resource element  $(k, 1)$  of every index  $k$  over 12 assigned subcarriers
- The resource element  $(k, 9)$  is mapped to resource element  $(k, 2)$  of every index  $k$  over 12 assigned subcarriers

A resource element  $(k, l)$  overlapping with resource elements where cell-specific reference signals according to clause 6.10 are transmitted or NRSs according to clause 10.2.6 are transmitted shall not be used for NWUS transmission but is counted in the mapping process.

## 10.2.7 Synchronization signals

There are 504 unique physical-layer cell identities indicated by the narrowband secondary synchronization signal.

### 10.2.7.1 Narrowband primary synchronization signal (NPSS)

#### 10.2.7.1.1 Sequence generation

The sequence  $d_l(n)$  used for the narrowband primary synchronization signal is generated from a frequency-domain Zadoff-Chu sequence according to

$$d_l(n) = S(l) \cdot e^{-j \frac{\pi u n(n+1)}{11}}, \quad n = 0, 1, \dots, 10$$

where the Zadoff-Chu root sequence index  $u=5$  and  $S(l)$  for different symbol indices  $l$  is given by Table 10.2.7.1.1-1.

**Table 10.2.7.1.1-1: Definition of  $S(l)$ .**

| Cyclic prefix length | $S(3), \dots, S(13)$ |   |   |   |    |    |   |   |   |   |    |   |
|----------------------|----------------------|---|---|---|----|----|---|---|---|---|----|---|
| Normal               | 1                    | 1 | 1 | 1 | -1 | -1 | 1 | 1 | 1 | 1 | -1 | 1 |

#### 10.2.7.1.2 Mapping to resource elements

The same antenna port shall be used for all symbols of the narrowband primary synchronization signal within a subframe.

UE shall not assume that the narrowband primary synchronization signal is transmitted on the same antenna port as any of the downlink reference signals. The UE shall not assume that the transmissions of the narrowband primary synchronization signal in a given subframe use the same antenna port, or ports, as the narrowband primary synchronization signal in any other subframe.



The UE shall not assume that the narrowband secondary synchronization signal is transmitted on the same antenna port as any of the downlink reference signals. The UE shall not assume that the transmissions of the narrowband secondary synchronization signal in a given subframe use the same antenna port, or ports, as the narrowband secondary synchronization signal in any other subframe.

If indicated by higher layer, a UE may assume different precoders are applied for NSSS transmission in a number of consecutive NSSS occasions signalled by higher layer.

The sequence  $d(n)$  shall be mapped to resource elements  $(k, l)$  in sequence starting with  $d(0)$  in increasing order of first the index  $k$  over the 12 assigned subcarriers and then the index  $l$  over the assigned last  $N_{\text{symb}}^{\text{NSSS}}$  symbols of subframe 9 for frame structure type 1 or subframe 0 for frame structure type 2 in radio frames fulfilling  $n_f \bmod 2 = 0$ , where  $N_{\text{symb}}^{\text{NSSS}}$  is given by Table 10.2.7.2.2-1.

**Table 10.2.7.2.2-1: NSSS number of symbols**

| Cyclic prefix length | $N_{\text{symb}}^{\text{NSSS}}$ |
|----------------------|---------------------------------|
| Normal               | 11                              |

For resource elements  $(k, l)$  overlapping with resource elements where cell-specific reference signals according to clause 6.10 are transmitted, the corresponding sequence element  $d(n)$  is not used for the NSSS but counted in the mapping process.

## 10.2.8 OFDM baseband signal generation

For an NB-IoT carrier

- for which the higher layer parameter *operationModeInfo* indicates 'inband-DifferentPCI' and for all NB-IoT downlink physical channels and signals except NPRS,
- for which the higher layer parameter *operationModeInfo* indicates 'Guardband' or 'Standalone',
- for an NB-IoT carrier for which the higher layer parameter *CarrierConfigDedicated-NB* or *DL-CarrierConfigCommon-NB* is present and no *inbandCarrierInfo* is present, or
- for an NB-IoT carrier for which the higher layer parameters *CarrierConfigDedicated-NB* or *DL-CarrierConfigCommon-NB* is present and *inbandCarrierInfo* is present and the higher layers do not indicate  $N_{\text{ID}}^{\text{cell}}$  is the same as  $N_{\text{ID}}^{\text{cell}}$  and for all NB-IoT downlink physical channels and signals except NPRS,

the time-continuous signal  $s_l^{(p)}(t)$  on antenna port  $p$  in OFDM symbol  $l$  in a downlink slot is defined by

$$s_l^{(p)}(t) = \sum_{k=-\lfloor N_{\text{sc}}^{\text{RB}}/2 \rfloor}^{\lfloor N_{\text{sc}}^{\text{RB}}/2 \rfloor - 1} a_{k^{(-)}, l}^{(p)} \cdot e^{j2\pi(k+1/2)\Delta f(t - N_{\text{CP}, l} T_s)}$$

for  $0 \leq t < (N_{\text{CP}, l} + N) \times T_s$  where  $k^{(-)} = k + \lfloor N_{\text{sc}}^{\text{RB}}/2 \rfloor$ ,  $N = 2048$ ,  $\Delta f = 15 \text{ kHz}$  and  $a_{k, l}^{(p)}$  is the content of resource element  $(k, l)$  on antenna port  $p$ .

Otherwise, the time-continuous signal  $s_{l'}^{(p)}(t)$  on antenna port  $p$  in OFDM symbol  $l'$ , where

$l' = l + N_{\text{symb}}^{\text{DL}}(n_s \bmod 4) \in \{0, \dots, 27\}$  is the OFDM symbol index from the start of the last even-numbered subframe, is defined by

$$s_{l'}^{(p)}(t) = \sum_{k=-\lfloor N_{\text{RB}}^{\text{DL}} N_{\text{sc}}^{\text{RB}}/2 \rfloor}^{-1} e^{j\theta_{k^{(-)}, l'}} a_{k^{(-)}, l'}^{(p)} \cdot e^{j2\pi k \Delta f \left( t - N_{\text{CP}, l' \bmod N_{\text{symb}}^{\text{DL}}} T_s \right)} + \sum_{k=1}^{\lfloor N_{\text{RB}}^{\text{DL}} N_{\text{sc}}^{\text{RB}}/2 \rfloor} e^{j\theta_{k^{(+)}, l'}} a_{k^{(+)}, l'}^{(p)} \cdot e^{j2\pi k \Delta f \left( t - N_{\text{CP}, l' \bmod N_{\text{symb}}^{\text{DL}}} T_s \right)}$$

for  $0 \leq t < (N_{CP,l} + N) \times T_s$  where  $k^{(-)} = k + \lfloor N_{RB}^{DL} N_{sc}^{RB} / 2 \rfloor$  and  $k^{(+)} = k + \lfloor N_{RB}^{DL} N_{sc}^{RB} / 2 \rfloor - 1$ ,

$$\theta_{k,l'} = j2\pi f_{NB-IoT} T_s \left( l' N + \sum_{i=0}^{l'} N_{CP,i \bmod 7} \right) \text{ if resource element } (k, l') \text{ is used for Narrowband IoT except for NPRS, and}$$

0 otherwise including NPRS. The quantity  $f_{NB-IoT}$  is the frequency location of the center of the Narrowband IoT PRB minus the frequency location of the center of the LTE signal.

Only normal CP is supported for Narrowband IoT downlink in this release of the specification.

## 10.2.9 Modulation and upconversion

Modulation and upconversion to the carrier frequency of the complex-valued OFDM baseband signal for each antenna port is shown in Figure 6.13-1. The filtering required prior to transmission is defined by the requirements in TS 36.104 [6].

# Annex A (informative): Change history

| Change history |       |           |      |     |                                                                                                                                                         |       |       |
|----------------|-------|-----------|------|-----|---------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|
| Date           | TSG # | TSG Doc.  | CR   | Rev | Subject/Comment                                                                                                                                         | Old   | New   |
| 2006-09-24     | -     | -         | -    | -   | Draft version created                                                                                                                                   | -     | 0.0.0 |
| 2006-10-09     | -     | -         | -    | -   | Updated skeleton                                                                                                                                        | 0.0.0 | 0.0.1 |
| 2006-10-13     | -     | -         | -    | -   | Endorsed by RAN1                                                                                                                                        | 0.0.1 | 0.1.0 |
| 2006-10-23     | -     | -         | -    | -   | Inclusion of decision from RAN1#46bis                                                                                                                   | 0.1.0 | 0.1.1 |
| 2006-11-06     | -     | -         | -    | -   | Updated editor 's version                                                                                                                               | 0.1.1 | 0.1.2 |
| 2006-11-09     | -     | -         | -    | -   | Updated editor 's version                                                                                                                               | 0.1.2 | 0.1.3 |
| 2006-11-10     | -     | -         | -    | -   | Endorsed by RAN1#47                                                                                                                                     | 0.1.3 | 0.2.0 |
| 2006-11-27     | -     | -         | -    | -   | Editor 's version, including decisions from RAN1#47                                                                                                     | 0.2.0 | 0.2.1 |
| 2006-12-14     | -     | -         | -    | -   | Updated editor 's version                                                                                                                               | 0.2.1 | 0.2.2 |
| 2007-01-15     | -     | -         | -    | -   | Updated editor 's version                                                                                                                               | 0.2.2 | 0.2.3 |
| 2007-01-19     | -     | -         | -    | -   | Endorsed by RAN1#47bis                                                                                                                                  | 0.2.3 | 0.3.0 |
| 2007-02-01     | -     | -         | -    | -   | Editor 's version, including decisions from RAN1#47bis                                                                                                  | 0.3.0 | 0.3.1 |
| 2007-02-12     | -     | -         | -    | -   | Updated editor 's version                                                                                                                               | 0.3.1 | 0.3.2 |
| 2007-02-16     | -     | -         | -    | -   | Endorsed by RAN1#48                                                                                                                                     | 0.3.2 | 0.4.0 |
| 2007-02-16     | -     | -         | -    | -   | Editor 's version, including decisions from RAN1#48                                                                                                     | 0.4.0 | 0.4.1 |
| 2007-02-21     | -     | -         | -    | -   | Updated editor 's version                                                                                                                               | 0.4.1 | 0.4.2 |
| 2007-03-03     | RP_35 | RP-070169 | -    | -   | For information at RAN#35                                                                                                                               | 0.4.2 | 1.0.0 |
| 2007-04-25     | -     | -         | -    | -   | Editor 's version, including decisions from RAN1#48bis and RAN1 TDD Ad Hoc                                                                              | 1.0.0 | 1.0.1 |
| 2007-05-03     | -     | -         | -    | -   | Updated editor 's version                                                                                                                               | 1.0.1 | 1.0.2 |
| 2007-05-08     | -     | -         | -    | -   | Updated editor 's version                                                                                                                               | 1.0.2 | 1.0.3 |
| 2007-05-11     | -     | -         | -    | -   | Updated editor 's version                                                                                                                               | 1.0.3 | 1.0.4 |
| 2007-05-11     | -     | -         | -    | -   | Endorsed by RAN1#49                                                                                                                                     | 1.0.4 | 1.1.0 |
| 2007-05-15     | -     | -         | -    | -   | Editor 's version, including decisions from RAN1#49                                                                                                     | 1.1.0 | 1.1.1 |
| 2007-06-05     | -     | -         | -    | -   | Updated editor 's version                                                                                                                               | 1.1.1 | 1.1.2 |
| 2007-06-25     | -     | -         | -    | -   | Endorsed by RAN1#49bis                                                                                                                                  | 1.1.2 | 1.2.0 |
| 2007-07-10     | -     | -         | -    | -   | Editor 's version, including decisions from RAN1#49bis                                                                                                  | 1.2.0 | 1.2.1 |
| 2007-08-10     | -     | -         | -    | -   | Updated editor 's version                                                                                                                               | 1.2.1 | 1.2.2 |
| 2007-08-20     | -     | -         | -    | -   | Updated editor 's version                                                                                                                               | 1.2.2 | 1.2.3 |
| 2007-08-24     | -     | -         | -    | -   | Endorsed by RAN1#50                                                                                                                                     | 1.2.3 | 1.3.0 |
| 2007-08-27     | -     | -         | -    | -   | Editor 's version, including decisions from RAN1#50                                                                                                     | 1.3.0 | 1.3.1 |
| 2007-09-05     | -     | -         | -    | -   | Updated editor 's version                                                                                                                               | 1.3.1 | 1.3.2 |
| 2007-09-08     | RP_37 | RP-070729 | -    | -   | For approval at RAN#37                                                                                                                                  | 1.3.2 | 2.0.0 |
| 12/09/07       | RP_37 | RP-070729 | -    | -   | Approved version                                                                                                                                        | 2.0.0 | 8.0.0 |
| 28/11/07       | RP_38 | RP-070949 | 0001 | -   | Introduction of optimized FS2 for TDD                                                                                                                   | 8.0.0 | 8.1.0 |
| 28/11/07       | RP_38 | RP-070949 | 0002 | -   | Introduction of scrambling sequences, uplink reference signal sequences, secondary synchronization sequences and control channel processing             | 8.0.0 | 8.1.0 |
| 05/03/08       | RP_39 | RP-080219 | 0003 | 1   | Update of uplink reference-signal hopping, downlink reference signals, scrambling sequences, DwPTS/UpPTS lengths for TDD and control channel processing | 8.1.0 | 8.2.0 |
| 28/05/08       | RP_40 | RP-080432 | 0004 | -   | Correction of the number of subcarriers in PUSCH transform precoding                                                                                    | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0005 | -   | Correction of PHICH mapping                                                                                                                             | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0006 | -   | Correction of PUCCH resource index for PUCCH format 2                                                                                                   | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0007 | 3   | Correction of the predefined hopping pattern for PUSCH                                                                                                  | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0008 | -   | Non-binary hashing functions                                                                                                                            | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0009 | 1   | PUCCH format 1                                                                                                                                          | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0010 | 1   | CR on Uplink DM RS hopping                                                                                                                              | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0012 | 1   | Correction to limitation of constellation size of ACK transmission in PUSCH                                                                             | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0015 | 1   | PHICH mapping for one and two antenna ports in extended CP                                                                                              | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0016 | 1   | Correction of PUCCH in absent of mixed format                                                                                                           | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0017 | -   | Specification of CCE size and PHICH resource indication                                                                                                 | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0018 | 3   | Correction of the description of frame structure type 2                                                                                                 | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0019 | -   | On Delta <sup>pucch</sup> shift correction                                                                                                              | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0021 | -   | Corrections to Secondary Synchronization Signal Mapping                                                                                                 | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0022 | -   | Downlink VRB mapping to PRB for distributed transmission                                                                                                | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0023 | -   | Clarification of modulation symbols to REs mapping for DVRB                                                                                             | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0024 | 1   | Consideration on the scrambling of PDSCH                                                                                                                | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0025 | -   | Corrections to Initialization of DL RS Scrambling                                                                                                       | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0026 | 1   | CR on Downlink RS                                                                                                                                       | 8.2.0 | 8.3.0 |

| Change history |       |           |      |     |                                                                                                        |       |       |
|----------------|-------|-----------|------|-----|--------------------------------------------------------------------------------------------------------|-------|-------|
| Date           | TSG # | TSG Doc.  | CR   | Rev | Subject/Comment                                                                                        | Old   | New   |
| 28/05/08       | RP_40 | RP-080432 | 0027 | -   | CR on Uplink RS                                                                                        | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0028 | 1   | Fixed timing advance offset for LTE TDD and half-duplex FDD                                            | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0029 | 1   | Timing of random access preamble format 4                                                              | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0030 | 1   | Uplink sounding RS bandwidth configuration                                                             | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0031 | -   | Use of common RS when UE-specific RS are configured                                                    | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0032 | 1   | Uplink RS Updates                                                                                      | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0033 | -   | Orthogonal cover sequence for shortened PUCCH format 1a and 1b                                         | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0034 | -   | Clarification of PDCCH mapping                                                                         | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0035 | -   | TDD PRACH time/frequency mapping                                                                       | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0036 | -   | Cell Specific Uplink Sounding RS Subframe Configuration                                                | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0038 | -   | PDCCH length for carriers with mixed MBSFN and Unicast Traffic                                         | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0040 | -   | Correction to the scrambling sequence generation for PUCCH, PCFICH, PHICH, MBSFN RS and UE specific RS | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0041 | -   | PDCCH coverage in narrow bandwidths                                                                    | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0042 | -   | Closed-Loop and Open-Loop Spatial Multiplexing                                                         | 8.2.0 | 8.3.0 |
| 28/05/08       | RP_40 | RP-080432 | 0043 | -   | Removal of small-delay CDD                                                                             | 8.2.0 | 8.3.0 |
| 09/09/08       | RP_41 | RP-080668 | 48   | 1   | Frequency Shifting of UE-specific RS                                                                   | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 49   | 1   | Correction of PHICH to RE mapping in extended CP subframe                                              | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 50   | -   | Corrections to for handling remaining Res                                                              | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 51   | -   | PRACH configuration for frame structure type 1                                                         | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 52   | 2   | Correction of PUCCH index generation formula                                                           | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 53   | -   | Orthogonal cover sequence for shortened PUCCH format 1a and 1b                                         | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 54   | -   | Correction of mapping of ACK/NAK to binary bit values                                                  | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 56   | 2   | Remaining issues on SRS hopping                                                                        | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 57   | 1   | Correction of $n_{cs}(n_s)$ and OC/CS remapping for PUCCH formats 1/1a/1b and 2/2a/2b                  | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 59   | -   | Corrections to Rank information scrambling in Uplink Shared Channel                                    | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 60   | -   | Definition on the slot number for frame structure type 2                                               | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 61   | -   | Correction of the Npucch sequence upper limit for the formats 1/1a/1b                                  | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 62   | 1   | Clarifications for DMRS parameters                                                                     | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 63   | -   | Correction of $n_{prs}$                                                                                | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 64   | 1   | Introducing missing L1 parameters to 36.211                                                            | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 65   | 3   | Clarification on reception of synchronization signals                                                  | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 66   | -   | Correction to the downlink/uplink timing                                                               | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 67   | -   | ACK/NAK Scrambling scheme on PUCCH                                                                     | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 68   | -   | DCI format1C                                                                                           | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 69   | -   | Refinement for REG Definition for $n = 4$                                                              | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 71   | -   | Correcting Ncs value for PRACH preamble format 0-3                                                     | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 73   | -   | Correction of the half duplex timing advance offset value                                              | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 74   | -   | Correction to Precoding for Transmit Diversity                                                         | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 75   | -   | Clarification on number of OFDM symbols used for PDCCH                                                 | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 77   | -   | Number of antenna ports for PDSCH                                                                      | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 78   | -   | Correction to Type 2 PUSCH predetermined hopping for $N_{sb}=1$ operation                              | 8.3.0 | 8.4.0 |
| 09/09/08       | RP_41 | RP-080668 | 79   | -   | PRACH frequency location                                                                               | 8.3.0 | 8.4.0 |
| 03/12/08       | RP_42 | RP-081074 | 70   | 1   | Correction for the definition of UE-specific reference signals                                         | 8.4.0 | 8.5.0 |
| 03/12/08       | RP_42 | RP-081074 | 72   | 2   | Corrections to precoding for large delay CDD                                                           | 8.4.0 | 8.5.0 |
| 03/12/08       | RP_42 | RP-081074 | 80   | -   | Correction to the definition of $n_{bar\_oc}$ for extended CP                                          | 8.4.0 | 8.5.0 |
| 03/12/08       | RP_42 | RP-081074 | 81   | 1   | Specification of reserved REs not used for RS                                                          | 8.4.0 | 8.5.0 |
| 03/12/08       | RP_42 | RP-081074 | 82   | 2   | Clarification of the random access preamble transmission timing                                        | 8.4.0 | 8.5.0 |
| 03/12/08       | RP_42 | RP-081074 | 83   | 1   | Indexing of PRACH resources within the radio frame                                                     | 8.4.0 | 8.5.0 |
| 03/12/08       | RP_42 | RP-081074 | 84   | 6   | Alignment of RAN1/RAN2 specification                                                                   | 8.4.0 | 8.5.0 |
| 03/12/08       | RP_42 | RP-081074 | 86   | -   | Clarification on scrambling of ACK/NAK bits for PUCCH format 2a/2b                                     | 8.4.0 | 8.5.0 |
| 03/12/08       | RP_42 | RP-081074 | 87   | -   | Correction of introduction of shortened SR                                                             | 8.4.0 | 8.5.0 |
| 03/12/08       | RP_42 | RP-081074 | 88   | -   | Corrections to 36.211                                                                                  | 8.4.0 | 8.5.0 |
| 03/12/08       | RP_42 | RP-081074 | 89   | -   | Clarification on PUSCH DM RS Cyclic Shift Hopping                                                      | 8.4.0 | 8.5.0 |
| 03/12/08       | RP_42 | RP-081074 | 92   | 1   | Correction to the uplink DM RS assignment                                                              | 8.4.0 | 8.5.0 |
| 03/12/08       | RP_42 | RP-081074 | 93   | -   | Clarify the RNTI used in scrambling sequence initialization                                            | 8.4.0 | 8.5.0 |
| 03/12/08       | RP_42 | RP-081074 | 94   | 1   | On linkage Among UL Power Control Parameters                                                           | 8.4.0 | 8.5.0 |
| 03/12/08       | RP_42 | RP-081074 | 95   | -   | Clarification on PUSCH pre-determined hopping pattern                                                  | 8.4.0 | 8.5.0 |
| 03/12/08       | RP_42 | RP-081074 | 96   | -   | Clarification of SRS sequence-group and base sequence number                                           | 8.4.0 | 8.5.0 |
| 03/12/08       | RP_42 | RP-081074 | 97   | 1   | SRS subframe configuration                                                                             | 8.4.0 | 8.5.0 |
| 03/12/08       | RP_42 | RP-081074 | 98   | -   | Remaining SRS details for TDD                                                                          | 8.4.0 | 8.5.0 |
| 03/12/08       | RP_42 | RP-081074 | 99   | -   | Clarifying UL VRB Allocation                                                                           | 8.4.0 | 8.5.0 |

| Change history |       |           |     |     |                                                                                                    |        |        |
|----------------|-------|-----------|-----|-----|----------------------------------------------------------------------------------------------------|--------|--------|
| Date           | TSG # | TSG Doc.  | CR  | Rev | Subject/Comment                                                                                    | Old    | New    |
| 03/12/08       | RP_42 | RP-081074 | 100 | -   | Clarification on PUCCH resource hopping                                                            | 8.4.0  | 8.5.0  |
| 03/12/08       | RP_42 | RP-081074 | 101 | -   | Correction for definition of Qm and a pseudo code syntax error in Scrambling.                      | 8.4.0  | 8.5.0  |
| 03/12/08       | RP_42 | RP-081074 | 105 | 1   | Remaining Issues on SRS of TDD                                                                     | 8.4.0  | 8.5.0  |
| 03/12/08       | RP_42 | RP-081074 | 106 | -   | Correction of reference to RAN4 specification of supported uplink bandwidth                        | 8.4.0  | 8.5.0  |
| 03/12/08       | RP_42 | RP-081074 | 107 | -   | General corrections to SRS                                                                         | 8.4.0  | 8.5.0  |
| 03/12/08       | RP_42 | RP-081074 | 109 | 2   | Correction to PCFICH specification                                                                 | 8.4.0  | 8.5.0  |
| 03/12/08       | RP_42 | RP-081074 | 110 | 1   | Correction to Layer Mapping for Transmit Diversity with Four Antenna Ports                         | 8.4.0  | 8.5.0  |
| 03/12/08       | RP_42 | RP-081074 | 111 | -   | Correction of the mapping of cyclic shift filed in DCI format 0 to the dynamic cyclic shift offset | 8.4.0  | 8.5.0  |
| 03/12/08       | RP_42 | RP-081074 | 112 | -   | DRS collision handling                                                                             | 8.4.0  | 8.5.0  |
| 03/12/08       | RP_42 | RP-081074 | 113 | -   | Clarification to enable reuse of non-active PUCCH CQI RBs for PUSCH                                | 8.4.0  | 8.5.0  |
| 03/12/08       | RP_42 | RP-081074 | 114 | 1   | PUSCH Mirror Hopping operation                                                                     | 8.4.0  | 8.5.0  |
| 03/12/08       | RP_42 | RP-081074 | 108 | 1   | Extended and normal cyclic prefix in DL and UL for LTE TDD                                         | 8.4.0  | 8.5.0  |
| 04/03/09       | RP_43 | RP-090234 | 115 | 1   | Alignment of PRACH configuration index for FS type 1 and type 2                                    | 8.5.0  | 8.6.0  |
| 04/03/09       | RP_43 | RP-090234 | 118 | 1   | Clarification for DRS Collision handling                                                           | 8.5.0  | 8.6.0  |
| 04/03/09       | RP_43 | RP-090234 | 121 | 1   | Removing inverse modulo operation                                                                  | 8.5.0  | 8.6.0  |
| 04/03/09       | RP_43 | RP-090234 | 123 | 1   | Clarification on the use of preamble format 4                                                      | 8.5.0  | 8.6.0  |
| 04/03/09       | RP_43 | RP-090234 | 124 | -   | Clarification of RNTI used in scrambling sequence                                                  | 8.5.0  | 8.6.0  |
| 04/03/09       | RP_43 | RP-090234 | 125 | 1   | Clarifying PDCCH RE mapping                                                                        | 8.5.0  | 8.6.0  |
| 04/03/09       | RP_43 | RP-090234 | 126 | -   | Correction of preamble format 4 timing                                                             | 8.5.0  | 8.6.0  |
| 04/03/09       | RP_43 | RP-090234 | 127 | 2   | Corrections to SRS                                                                                 | 8.5.0  | 8.6.0  |
| 04/03/09       | RP_43 | RP-090234 | 128 | 2   | Clarification of PDSCH Mapping to Resource Elements                                                | 8.5.0  | 8.6.0  |
| 04/03/09       | RP_43 | RP-090234 | 129 | 1   | Alignment with correct ASN1 parameter names                                                        | 8.5.0  | 8.6.0  |
| 04/03/09       | RP_43 | RP-090234 | 130 | -   | Correction to PUCCH format 1 mapping to physical resources                                         | 8.5.0  | 8.6.0  |
| 04/03/09       | RP_43 | RP-090234 | 132 | -   | Correction to type-2 PUSCH hopping                                                                 | 8.5.0  | 8.6.0  |
| 04/03/09       | RP_43 | RP-090234 | 134 | -   | Alignment of SRS configuration                                                                     | 8.5.0  | 8.6.0  |
| 27/05/09       | RP_44 | RP-090527 | 135 | -   | Correction on UE behavior for PRACH 20ms periodicity                                               | 8.6.0  | 8.7.0  |
| 15/09/09       | RP_45 | RP-090888 | 137 | 1   | Clarification on DMRS sequence for PUSCH                                                           | 8.7.0  | 8.8.0  |
| 15/09/09       | RP_45 | RP-090888 | 138 | 1   | Correction to PHICH resource mapping for TDD and to PHICH scrambling                               | 8.7.0  | 8.8.0  |
| 01/12/09       | RP_46 | RP-091168 | 142 | -   | Clarification of the transmit condition for UE specific reference signals                          | 8.8.0  | 8.9.0  |
| 01/12/09       | RP_46 | RP-091172 | 139 | 2   | Introduction of LTE positioning                                                                    | 8.9.0  | 9.0.0  |
| 01/12/09       | RP_46 | RP-091177 | 140 | 3   | Editorial corrections to 36.211                                                                    | 8.9.0  | 9.0.0  |
| 01/12/09       | RP_46 | RP-091257 | 141 | 1   | Introduction of enhanced dual layer transmission                                                   | 8.9.0  | 9.0.0  |
| 16/03/10       | RP_47 | RP-100209 | 144 | 1   | Removal of square brackets on positioning subframe periodicities                                   | 9.0.0  | 9.1.0  |
| 16/03/10       | RP_47 | RP-100209 | 145 | -   | Clarification of the CP length of empty OFDM symbols in PRS subframes                              | 9.0.0  | 9.1.0  |
| 16/03/10       | RP_47 | RP-100210 | 146 | -   | Clarification of MBSFN subframe definition                                                         | 9.0.0  | 9.1.0  |
| 07/12/10       | RP_50 | RP-101320 | 148 | -   | Introduction of Rel-10 LTE-Advanced features in 36.211                                             | 9.1.0  | 10.0.0 |
| 15/03/11       | RP_51 | RP-110254 | 149 | 1   | Correction on UE behavior for PRACH preamble format 4                                              | 10.0.0 | 10.1.0 |
| 15/03/11       | RP_51 | RP-110256 | 150 | -   | Corrections to Rel-10 LTE-Advanced features in 36.211                                              | 10.0.0 | 10.1.0 |
| 01/06/11       | RP_52 | RP-110818 | 153 | 2   | PUSCH interaction with periodic SRS                                                                | 10.1.0 | 10.2.0 |
| 01/06/11       | RP_52 | RP-110819 | 154 | 1   | Correction on describing PUCCH format 3                                                            | 10.1.0 | 10.2.0 |
| 01/06/11       | RP_52 | RP-110821 | 155 | 3   | Correction on codebooks for CSI-RS based feedback for up to 4 CSI-RS ports.                        | 10.1.0 | 10.2.0 |
| 01/06/11       | RP_52 | RP-110821 | 156 | -   | Correction on overlapping non-zero-power and zero-power CSI-RS configurations                      | 10.1.0 | 10.2.0 |
| 01/06/11       | RP_52 | RP-110821 | 157 | -   | Correction on CSI-RS configuration                                                                 | 10.1.0 | 10.2.0 |
| 01/06/11       | RP_52 | RP-110821 | 158 | -   | PDSCH transmission in MBSFN subframes                                                              | 10.1.0 | 10.2.0 |
| 01/06/11       | RP_52 | RP-110823 | 159 | -   | Correction on implicit derivation of transmission comb per antenna port for SRS                    | 10.1.0 | 10.2.0 |
| 01/06/11       | RP_52 | RP-110823 | 160 | -   | Uplink DMRS sequence in RACH procedure                                                             | 10.1.0 | 10.2.0 |
| 15/09/11       | RP_53 | RP-111229 | 162 | -   | Corrections on DMRS for Extended CP                                                                | 10.2.0 | 10.3.0 |
| 15/09/11       | RP_53 | RP-111228 | 163 | -   | Clarification of applicability of precoding power scaling factors for PDSCH                        | 10.2.0 | 10.3.0 |
| 15/09/11       | RP_53 | RP-111228 | 164 | -   | Correction to modulation and upconversion on PRACH                                                 | 10.2.0 | 10.3.0 |
| 15/09/11       | RP_53 | RP-111229 | 165 | -   | Clarification on cyclic prefix of PDSCH in MBSFN subframes                                         | 10.2.0 | 10.3.0 |
| 15/09/11       | RP_53 | RP-111229 | 166 | 3   | Corrections on indication in scrambling identity field in DCI format 2B and 2C                     | 10.2.0 | 10.3.0 |
| 05/12/11       | RP_54 | RP-111668 | 167 | -   | A correction to PDSCH precoding for CQI calculation                                                | 10.3.0 | 10.4.0 |
| 05/12/11       | RP_54 | RP-111668 | 168 | -   | Correction to figure of CSI-RS pattern in extended-CP subframe                                     | 10.3.0 | 10.4.0 |
| 13/06/12       | RP_56 | RP-120736 | 169 | -   | Correction to resource mapping for PDSCH                                                           | 10.4.0 | 10.5.0 |
| 13/06/12       | RP_56 | RP-120739 | 171 | -   | Correction for DMRS group hopping and sequence hopping                                             | 10.4.0 | 10.5.0 |
| 13/06/12       | RP_56 | RP-120738 | 172 | -   | Correction to assumed CSI-RS transmissions in subframes used for paging                            | 10.4.0 | 10.5.0 |

| Change history |       |           |     |     |                                                                                |        |        |
|----------------|-------|-----------|-----|-----|--------------------------------------------------------------------------------|--------|--------|
| Date           | TSG # | TSG Doc.  | CR  | Rev | Subject/Comment                                                                | Old    | New    |
| 04/09/12       | RP_57 | RP-121274 | 170 | 4   | Introduction of an additional special subframe configuration                   | 10.5.0 | 11.0.0 |
| 04/09/12       | RP_57 | RP-121272 | 173 | -   | Inclusion of Rel-11 features                                                   | 10.5.0 | 11.0.0 |
| 04/12/12       | RP_58 | RP-121839 | 175 | -   | Correction to assumed CSI-RS transmissions in secondary cells                  | 11.0.0 | 11.1.0 |
| 04/12/12       | RP_58 | RP-121846 | 176 | -   | Correction to assumed CSI-RS transmissions in secondary cells                  | 11.0.0 | 11.1.0 |
| 26/02/13       | RP_59 | RP-130254 | 178 | -   | Clarification of CSI RS mapping to resource elements                           | 11.1.0 | 11.2.0 |
| 26/02/13       | RP_59 | RP-130254 | 180 | -   | Correction to CSI Reference Signals                                            | 11.1.0 | 11.2.0 |
| 26/02/13       | RP_59 | RP-130255 | 181 | -   | Additional clarifications/corrections for introducing Rel-11 features          | 11.1.0 | 11.2.0 |
| 11/06/13       | RP_60 | RP-130752 | 182 | -   | Correction to EPDCCH PRB pair indication                                       | 11.2.0 | 11.3.0 |
| 11/06/13       | RP_60 | RP-130752 | 183 | -   | CR on collision between EPDCCH and PSS/SSS/PBCH                                | 11.2.0 | 11.3.0 |
| 03/09/13       |       |           |     |     | MCC clean-up                                                                   | 11.3.0 | 11.4.0 |
| 03/09/13       | RP_60 | RP-131250 | 185 | -   | Correction to QCL behaviour on CRS                                             | 11.3.0 | 11.4.0 |
| 03/12/13       | RP_62 | RP-131894 | 186 | -   | Correction on the derivation of the non-MBSFN region by PCFICH                 | 11.4.0 | 11.5.0 |
| 03/12/13       | RP_62 | RP-131896 | 184 | 3   | Introduction of Rel 12 feature for Downlink MIMO Enhancement                   | 11.5.0 | 12.0.0 |
| 03/03/14       | RP_63 | RP-140286 | 187 | -   | On PMCH starting symbol in an MBSFN subframe                                   | 12.0.0 | 12.1.0 |
| 10/06/14       | RP_64 | RP-140858 | 189 | -   | CR on antenna port definitions                                                 | 12.1.0 | 12.2.0 |
| 10/06/14       | RP_64 | RP-140858 | 190 | 1   | Clarification of downlink subframes                                            | 12.1.0 | 12.2.0 |
| 10/06/14       | RP_64 | RP-140862 | 191 | -   | Inclusion of eIMTA, TDD-FDD CA, and coverage enhancements                      | 12.1.0 | 12.2.0 |
| 10/09/14       | RP_65 | RP-141485 | 192 | -   | Inclusion of low-cost MTC and 256QAM                                           | 12.2.0 | 12.3.0 |
| 10/09/14       | RP_65 | RP-141477 | 194 | -   | CR on port 5 UE-specific reference signal when PDSCH is overlapped with EPDCCH | 12.2.0 | 12.3.0 |
| 08/12/14       | RP_66 | RP-142098 | 195 | 3   | Clarification of PUSCH rate matching with SRS                                  | 12.3.0 | 12.4.0 |
| 08/12/14       | RP_66 | RP-142106 | 197 | 4   | Inclusion of small-cell enhancements                                           | 12.3.0 | 12.4.0 |
| 09/03/15       | RP_67 | RP-150366 | 196 | 7   | Inclusion of ProSe                                                             | 12.4.0 | 12.5.0 |
| 09/03/15       | RP_67 | RP-150364 | 198 | -   | Correction on 256QAM applicability to PMCH                                     | 12.4.0 | 12.5.0 |
| 09/03/15       | RP_67 | RP-150364 | 199 | -   | Correction of discovery signal transmission                                    | 12.4.0 | 12.5.0 |
| 15/06/15       | RP_68 | RP-150935 | 201 | -   | Alignment of ProSe parameters                                                  | 12.5.0 | 12.6.0 |
| 14/09/15       | RP_69 | RP-151465 | 203 | -   | Clarification on SRS BW configuration                                          | 12.6.0 | 12.7.0 |
| 07/12/15       | RP_70 | RP-152036 | 209 | 1   | Modify max TA for dual connectivity                                            | 12.7.0 | 12.8.0 |
| 07/12/15       | RP_70 | RP-152025 | 206 | 2   | Introduction of EB/FD-MIMO                                                     | 12.8.0 | 13.0.0 |
| 07/12/15       | RP_70 | RP-152027 | 208 | 1   | Introduction of Rel-13 eCA                                                     | 12.8.0 | 13.0.0 |
| 07/12/15       | RP_70 | RP-152125 | 204 | 2   | eD2D CR for 36.211                                                             | 12.8.0 | 13.0.0 |
| 07/12/15       | RP_70 | RP-152258 | 205 | 4   | Introduction of LAA                                                            | 12.8.0 | 13.0.0 |

| Change history |         |           |     |     |     |                                                                        |             |
|----------------|---------|-----------|-----|-----|-----|------------------------------------------------------------------------|-------------|
| Date           | Meeting | TDoc      | CR  | Rev | Cat | Subject/Comment                                                        | New version |
| 2016-03        | RAN#71  | RP-160359 | 210 | -   | F   | Alignment eD2D CR for 36.211                                           | 13.1.0      |
| 2016-03        | RAN#71  | RP-160367 | 212 | -   | F   | Clarification on PDSCH collision with PSS/SSS/PBCH                     | 13.1.0      |
| 2016-03        | RAN#71  | RP-160357 | 213 | -   | F   | Correction on support of CA with up to 32 CCs                          | 13.1.0      |
| 2016-03        | RAN#71  | RP-160357 | 214 | -   | F   | Correction on PUCCH format 4 and 5                                     | 13.1.0      |
| 2016-03        | RAN#71  | RP-160360 | 217 | -   | F   | Correction on DRS subframe in 36.211                                   | 13.1.0      |
| 2016-03        | RAN#71  | RP-160360 | 218 | -   | F   | Correction on EPDCCH start symbol in LAA                               | 13.1.0      |
| 2016-03        | RAN#71  | RP-160360 | 219 | -   | F   | Correction to MBSFN subframe configuration                             | 13.1.0      |
| 2016-03        | RAN#71  | RP-160358 | 220 | -   | F   | CR on CSI-RS configuration for more than eight antenna ports in 36.211 | 13.1.0      |
| 2016-03        | RAN#71  | RP-160358 | 221 | -   | F   | CR on mismatch between 36.211 and 36.331                               | 13.1.0      |
| 2016-03        | RAN#71  | RP-160358 | 222 | -   | F   | Clarification on additional SC-FDMA symbols in UpPTS for SRS           | 13.1.0      |
| 2016-03        | RAN#71  | RP-160358 | 223 | -   | F   | Correction on Precoding and definition of DMRS ports                   | 13.1.0      |
| 2016-03        | RAN#71  | RP-160361 | 207 | 9   | B   | Introduction of LC/CE MTC                                              | 13.1.0      |
| 2016-06        | RAN#72  | RP-161063 | 216 | 2   | F   | CR on CSI-RS transmission in DwPTS                                     | 13.2.0      |
| 2016-06        | RAN#72  | RP-161067 | 224 | 8   | B   | Introduction of NB-IoT                                                 | 13.2.0      |
| 2016-06        | RAN#72  | RP-161066 | 229 | 2   | F   | Collision between PSS/SSS/PBCH and MPDCCH/PDSCH for MTC                | 13.2.0      |

|         |        |           |     |   |   |                                                                                              |        |
|---------|--------|-----------|-----|---|---|----------------------------------------------------------------------------------------------|--------|
| 2016-06 | RAN#72 | RP-161066 | 230 | - | F | DMRS initialization of CSS for MTC                                                           | 13.2.0 |
| 2016-06 | RAN#72 | RP-161066 | 231 | - | F | Missing words in PRACH starting subframe paragraph for MTC                                   | 13.2.0 |
| 2016-06 | RAN#72 | RP-161065 | 232 | - | F | Correction to EPDCCH procedures for LAA FS 3                                                 | 13.2.0 |
| 2016-06 | RAN#72 | RP-161063 | 233 | - | F | Clarification on PDSCH mapping to resource elements                                          | 13.2.0 |
| 2016-06 | RAN#72 | RP-161063 | 234 | - | F | CR on CSI-RS description in TS 36.211                                                        | 13.2.0 |
| 2016-06 | RAN#72 | RP-161065 | 235 | - | F | Corrections on the support of ending partial subframe in LAA                                 | 13.2.0 |
| 2016-06 | RAN#72 | RP-161063 | 236 | - | F | Clarification of CSI-RS on extended CP                                                       | 13.2.0 |
| 2016-06 | RAN#72 | RP-161063 | 237 | - | F | Correction on description about UpPTS length for preamble format 4 for PRACH                 | 13.2.0 |
| 2016-06 | RAN#72 | RP-161066 | 238 | - | F | Correction to TS 36.211 for eMTC                                                             | 13.2.0 |
| 2016-06 | RAN#72 | RP-161066 | 239 | - | F | Narrow band hopping                                                                          | 13.2.0 |
| 2016-06 | RAN#72 | RP-161066 | 240 | 1 | F | CR on MPDCCH format for Rmax=1 and 2/4 PRBs                                                  | 13.2.0 |
| 2016-06 | RAN#72 | RP-161066 | 241 | 1 | F | Correction on RE mapping in MBSFN subframe for BL/CE UEs in CEModeB                          | 13.2.0 |
| 2016-06 | RAN#72 | RP-161063 | 242 | - | F | Correction on the description about DMRS                                                     | 13.2.0 |
| 2016-06 | RAN#72 | RP-161066 | 243 | - | F | CR for TS36.211 related to 2+4 PRB set                                                       | 13.2.0 |
| 2016-06 | RAN#72 | RP-161065 | 244 | - | F | CR on UE assumptions on number of CRS ports in DRS                                           | 13.2.0 |
| 2016-06 | RAN#72 | RP-161066 | 245 | - | F | Some corrections for eMTC                                                                    | 13.2.0 |
| 2016-06 | RAN#72 | RP-161066 | 247 | - | F | Clarification of MPDCCH over empty CRS tones in PBCH repetition                              | 13.2.0 |
| 2016-06 | RAN#72 | RP-161066 | 248 | - | F | Scrambling sequence initialization                                                           | 13.2.0 |
| 2016-06 | RAN#72 | RP-161066 | 249 | - | F | On MPDCCH AL for 8 EREGs per ECCE in TS 36.211                                               | 13.2.0 |
| 2016-06 | RAN#72 | RP-161066 | 250 | - | F | Overriding of valid-invalid subframes for R=1                                                | 13.2.0 |
| 2016-06 | RAN#72 | RP-161066 | 251 | - | F | Scrambling Sequence for paging MPDCCH and PDSCH                                              | 13.2.0 |
| 2016-06 | RAN#72 | RP-161066 | 252 | - | F | Scrambling sequence initialization for PDSCH                                                 | 13.2.0 |
| 2016-09 | RAN#73 | RP-161563 | 253 | - | F | Correction on DMRS for NB-IoT in TS 36.211                                                   | 13.3.0 |
| 2016-09 | RAN#73 | RP-161563 | 254 | 1 | F | Correction on NPRACH in TS 36.211                                                            | 13.3.0 |
| 2016-09 | RAN#73 | RP-161563 | 255 | - | F | Correction on SC-FDMA signal generation for NB-IoT in TS 36.211                              | 13.3.0 |
| 2016-09 | RAN#73 | RP-161563 | 256 | - | F | Corrections to RRC parameter names for NB-IoT in TS 36.211                                   | 13.3.0 |
| 2016-09 | RAN#73 | RP-161562 | 259 | - | F | MPDCCH search-space with Temporary C-RNTI                                                    | 13.3.0 |
| 2016-09 | RAN#73 | RP-161563 | 260 | - | F | Correction on NPBCH in TS 36.211                                                             | 13.3.0 |
| 2016-09 | RAN#73 | RP-161563 | 261 | 1 | F | Correction on UL collisions in TS 36.211                                                     | 13.3.0 |
| 2016-09 | RAN#73 | RP-161563 | 262 | 1 | F | Correction on NPSS mapping in TS 36.211                                                      | 13.3.0 |
| 2016-09 | RAN#73 | RP-161563 | 263 | 1 | F | Corrections on the presence of NRS for standalone and guard band operation mode in TS 36.211 | 13.3.0 |
| 2016-09 | RAN#73 | RP-161561 | 264 | - | F | Correction on the determination of EPDCCH starting position                                  | 13.3.0 |
| 2016-09 | RAN#73 | RP-161563 | 265 | - | F | Corrections on NPDCCH scrambling in TS 36.211                                                | 13.3.0 |
| 2016-09 | RAN#73 | RP-161562 | 272 | 1 | F | Frequency hopping for SI and paging messages for BL/CE UE                                    | 13.3.0 |
| 2016-09 | RAN#73 | RP-161562 | 275 | - | F | Scrambling of DL DMRS for BL/CE UE                                                           | 13.3.0 |
| 2016-09 | RAN#73 | RP-161562 | 276 | - | F | Enable cross-subframe channel estimation for BL/CE UE                                        | 13.3.0 |
| 2016-09 | RAN#73 | RP-161562 | 278 | - | F | Frequency hopping interval for MPDCCH during random access for BL/CE UE                      | 13.3.0 |

|         |        |           |      |   |   |                                                                                                                            |        |
|---------|--------|-----------|------|---|---|----------------------------------------------------------------------------------------------------------------------------|--------|
| 2016-09 | RAN#73 | RP-161565 | 279  | - | F | CR on the correction from SC-FDFMA to SC-FDMA                                                                              | 13.3.0 |
| 2016-09 | RAN#73 | RP-161561 | 280  | - | F | Correction for PHICH resource reservation on the LAA cell in 36.211 for Rel-13 LAA                                         | 13.3.0 |
| 2016-09 | RAN#73 | RP-161562 | 281  | - | F | Correction on MPDCCH transmission without repetition in special subframes                                                  | 13.3.0 |
| 2016-09 | RAN#73 | RP-161563 | 282  | 1 | F | Introduction of a reserved range of NPRACH sub-carriers for contention based access                                        | 13.3.0 |
| 2016-09 | RAN#73 | RP-161562 | 283  | - | F | Clarification of valid subframe in eMTC                                                                                    | 13.3.0 |
| 2016-09 | RAN#73 | RP-161563 | 284  | - | F | Correction of NB-IoT antenna port mapping                                                                                  | 13.3.0 |
| 2016-09 | RAN#73 | RP-161562 | 285  | - | F | Clarification on PRACH system frame number                                                                                 | 13.3.0 |
| 2016-09 | RAN#73 | RP-161562 | 286  | - | F | PUCCH retuning with puncturing for BL/CE UE                                                                                | 13.3.0 |
| 2016-09 | RAN#73 | RP-161563 | 287  | 1 | F | Phase difference between NRS and CRS                                                                                       | 13.3.0 |
| 2016-09 | RAN#73 | RP-161825 | 288  | 1 | B | Continuous uplink transmission in eMTC                                                                                     | 13.3.0 |
| 2016-09 | RAN#73 | RP-161571 | 266  | 2 | B | Introduction of eLAA                                                                                                       | 14.0.0 |
| 2016-09 | RAN#73 | RP-161570 | 267  | 2 | B | Introduction of V2V support                                                                                                | 14.0.0 |
| 2016-12 | RAN#74 | RP-162368 | 0297 | - | F | CR on start timing of PUSCH                                                                                                | 14.1.0 |
| 2016-12 | RAN#74 | RP-162358 | 0298 | - | A | Correction to DMRS for MPDCCH associated with P-RNTI – Rel-14                                                              | 14.1.0 |
| 2016-12 | RAN#74 | RP-162359 | 0300 | - | A | Clarification on NPRACH and NPUSCH collision                                                                               | 14.1.0 |
| 2016-12 | RAN#74 | RP-162358 | 0302 | 1 | A | Clarification on i_0 value                                                                                                 | 14.1.0 |
| 2016-12 | RAN#74 | RP-162358 | 0304 | - | A | Correction of PRACH starting subframes for eMTC                                                                            | 14.1.0 |
| 2016-12 | RAN#74 | RP-162359 | 0306 | - | A | Correction of NPRACH frequency hopping                                                                                     | 14.1.0 |
| 2016-12 | RAN#74 | RP-162358 | 0307 | - | A | Correction on MPDCCH transmission without repetition                                                                       | 14.1.0 |
| 2016-12 | RAN#74 | RP-162358 | 0308 | - | A | Correction of typos due to wrong implementation of CR0283 "Clarification of valid subframe in eMTC "                       | 14.1.0 |
| 2016-12 | RAN#74 | RP-162356 | 0309 | - | A | Correction on NZP CSI-RS aggregation for Class A                                                                           | 14.1.0 |
| 2016-12 | RAN#74 | RP-162367 | 0310 | 2 | B | Introduction of performance enhancements for high speed scenario                                                           | 14.1.0 |
| 2016-12 | RAN#74 | RP-162450 | 0311 | - | B | Introduction of further indoor positioning enhancements                                                                    | 14.1.0 |
| 2016-12 | RAN#74 | RP-162365 | 0312 | 1 | B | Introduction of Multiuser Superposition Transmission (MUST)                                                                | 14.1.0 |
| 2016-12 | RAN#74 | RP-162359 | 0316 | 1 | A | Correction on NPDSCH Mapping to resource elements in 36.211                                                                | 14.1.0 |
| 2016-12 | RAN#74 | RP-162358 | 0320 | - | A | UL gap applicability for CE Mode A                                                                                         | 14.1.0 |
| 2016-12 | RAN#74 | RP-162355 | 0322 | - | A | CR on pseudo-random sequence generator for PUCCH format 4 and PUCCH format 5 and sequence group hopping for PUCCH format 4 | 14.1.0 |
| 2016-12 | RAN#74 | RP-162359 | 0324 | - | A | Clarification on vShift value for CRS                                                                                      | 14.1.0 |
| 2016-12 | RAN#74 | RP-162359 | 0326 | - | A | Correction to OFDM baseband signal generation of NB-IoT                                                                    | 14.1.0 |
| 2016-12 | RAN#74 | RP-162358 | 0327 | - | A | Mapping of MPDCCH and PDSCH                                                                                                | 14.1.0 |
| 2016-12 | RAN#74 | RP-162364 | 0328 | - | B | Introduction of SRS switching between LTE component carriers                                                               | 14.1.0 |
| 2016-12 | RAN#74 | RP-162366 | 0329 | - | F | Corrections for V2V                                                                                                        | 14.1.0 |
| 2017-03 | RAN#75 | RP-170605 | 0330 | 1 | B | Introduction of Uplink Capacity Enhancements for LTE                                                                       | 14.2.0 |
| 2017-03 | RAN#75 | RP-170608 | 0331 | 1 | B | Introduction of eMBMS enhancements for LTE                                                                                 | 14.2.0 |
| 2017-03 | RAN#75 | RP-170623 | 0332 | 2 | B | Introduction of Further Enhanced MTC for LTE                                                                               | 14.2.0 |
| 2017-03 | RAN#75 | RP-170624 | 0333 | 3 | B | Introduction of NB-IoT enhancements                                                                                        | 14.2.0 |
| 2017-03 | RAN#75 | RP-170622 | 0334 | 2 | B | Introduction of V2X                                                                                                        | 14.2.0 |

|         |        |           |      |   |   |                                                                                                            |        |
|---------|--------|-----------|------|---|---|------------------------------------------------------------------------------------------------------------|--------|
| 2017-03 | RAN#75 | RP-170607 | 0335 | 2 | B | Introduction of eFD-MIMO                                                                                   | 14.2.0 |
| 2017-03 | RAN#75 | RP-170625 | 0336 | 2 | B | Introduction of Voice and Video enhancement for LTE                                                        | 14.2.0 |
| 2017-03 | RAN#75 | RP-170610 | 0338 | 2 | A | Correction on the scrambling of NPDSCH carrying the BCCH                                                   | 14.2.0 |
| 2017-03 | RAN#75 | RP-170609 | 0340 | - | A | Frequency hopping in eMTC                                                                                  | 14.2.0 |
| 2017-03 | RAN#75 | RP-170609 | 0342 | - | A | Retuning gap with shortened PUCCH format for BL/CE UE                                                      | 14.2.0 |
| 2017-03 | RAN#75 | RP-170609 | 0344 | - | A | Parameters for number of PUCCH repetitions for Msg4 for BL/CE UE – Superseded by CR0332r2                  | 14.2.0 |
| 2017-03 | RAN#75 | RP-170609 | 0346 | - | A | Clarification on repetition and starting subframe of the MPDCCH search space                               | 14.2.0 |
| 2017-03 | RAN#75 | RP-170615 | 0347 | - | F | CR for SRS switching in 36.211                                                                             | 14.2.0 |
| 2017-03 | RAN#75 | RP-170617 | 0348 | - | F | CR on the new restricted sets of cyclic shifts for PRACH for high speed in 36.211                          | 14.2.0 |
| 2017-03 | RAN#75 | RP-170612 | 0352 | - | A | Correction on single layer precoding for EPCCCH                                                            | 14.2.0 |
| 2017-03 | RAN#75 | RP-170610 | 0354 | - | A | NPBCH symbol rotation for interference randomization in NB-IoT                                             | 14.2.0 |
| 2017-03 | RAN#75 | RP-170617 | 0355 | - | F | Correction to PRACH resource configuration for high speed scenario in TS 36.211                            | 14.2.0 |
| 2017-06 | RAN#76 | RP-171205 | 0356 | - | F | Correction on baseband generation for paging/random access non-anchor carriers                             | 14.3.0 |
| 2017-06 | RAN#76 | RP-171204 | 0357 | - | F | Correction of reference to PRS occasion group for OTDOA enhancements                                       | 14.3.0 |
| 2017-06 | RAN#76 | RP-171204 | 0358 | - | F | Center frequency for PUSCH allocation in larger bandwidth mode in FeMTC                                    | 14.3.0 |
| 2017-06 | RAN#76 | RP-171205 | 0359 | - | F | Clarification of NRS presence                                                                              | 14.3.0 |
| 2017-06 | RAN#76 | RP-171194 | 0360 | - | F | Clarification and Correction on IFDMA UL-DMRS for eFD-MIMO                                                 | 14.3.0 |
| 2017-06 | RAN#76 | RP-171199 | 0363 | - | A | Clarification on PDSCH collision with PSS/SSS in TDD                                                       | 14.3.0 |
| 2017-06 | RAN#76 | RP-171195 | 0364 | - | F | Clarification on CDM-8 pattern for 24-ports CSI-RS in DwPTS                                                | 14.3.0 |
| 2017-06 | RAN#76 | RP-171192 | 0365 | - | F | Correction on PUSCH symbol locations in UpPTS for UL capacity enhancement in TS 36.211                     | 14.3.0 |
| 2017-06 | RAN#76 | RP-171196 | 0366 | - | A | CR on correction of PRACH transmission across SFN boundary                                                 | 14.3.0 |
| 2017-06 | RAN#76 | RP-171204 | 0367 | - | F | Correction on resource mapping in case of retuning in 36.211                                               | 14.3.0 |
| 2017-06 | RAN#76 | RP-171197 | 0369 | 1 | A | Correction on NB-IoT DMRS definition in 36.211                                                             | 14.3.0 |
| 2017-06 | RAN#76 | RP-171197 | 0371 | 1 | A | Correction on NB-IoT SC-FDMA baseband signal generation in 36.211                                          | 14.3.0 |
| 2017-06 | RAN#76 | RP-171197 | 0373 | - | A | Clarification on the definition of the nprach-NumCBRA-StartSubcarriers                                     | 14.3.0 |
| 2017-06 | RAN#76 | RP-171204 | 0374 | - | F | Parallel reception of MPDCCH and PDSCH for BL/CE UE                                                        | 14.3.0 |
| 2017-06 | RAN#76 | RP-171194 | 0375 | - | F | CR for precoding for spatial multiplexing using antenna ports with UE-specific reference signals in 36.211 | 14.3.0 |
| 2017-06 | RAN#76 | RP-171194 | 0376 | - | F | Correction to CSI-RS configuration                                                                         | 14.3.0 |
| 2017-06 | RAN#76 | RP-171196 | 0378 | - | A | Clarification of frequency hopping for "PDCCH order " initiated PUSCH                                      | 14.3.0 |
| 2017-06 | RAN#76 | RP-171196 | 0380 | - | A | Correction on determination of number of repetitions PUCCH format 1                                        | 14.3.0 |
| 2017-06 | RAN#76 | RP-171204 | 0381 | - | F | Correction on PRS hopping                                                                                  | 14.3.0 |
| 2017-06 | RAN#76 | RP-171205 | 0383 | - | F | NRS presence assumptions on unicast non-anchor carriers                                                    | 14.3.0 |
| 2017-09 | RAN#77 | RP-171646 | 0384 | - | F | Correction of RRC parameter name for non-anchor carriers                                                   | 14.4.0 |
| 2017-09 | RAN#77 | RP-171638 | 0386 | 1 | F | Corrections on CDM8 sequence for 24 and 32 CSI-RS ports and CDM4 sequence                                  | 14.4.0 |
| 2017-09 | RAN#77 | RP-171645 | 0387 | - | F | PRS and PDSCH/MPDCCH collision                                                                             | 14.4.0 |
| 2017-09 | RAN#77 | RP-171640 | 0389 | - | A | NPUSCH transmission during NPRACH gaps                                                                     | 14.4.0 |
| 2017-09 | RAN#77 | RP-171639 | 0391 | - | A | MPDCCH Frequency hopping for RRC connected contention-based RACH                                           | 14.4.0 |

|         |        |           |      |   |   |                                                                                                              |        |
|---------|--------|-----------|------|---|---|--------------------------------------------------------------------------------------------------------------|--------|
| 2017-09 | RAN#77 | RP-171646 | 0392 | 1 | F | Interference randomization for NPDCCH and NPDSCH                                                             | 14.4.0 |
| 2017-12 | RAN#78 | RP-172688 | 0395 | - | A | Clarification on DMRS ports associated with PDSCH                                                            | 14.5.0 |
| 2017-12 | RAN#78 | RP-172680 | 0396 | - | A | Correction on MPDCCH frequency hopping                                                                       | 14.5.0 |
| 2017-12 | RAN#78 | RP-172685 | 0397 | - | F | SRS to SRS retuning in UpPTS                                                                                 | 14.5.0 |
| 2017-12 | RAN#78 | RP-172679 | 0398 | - | F | Correction on power boosting for UL DMRS                                                                     | 14.5.0 |
| 2017-12 | RAN#78 | RP-172680 | 0402 | - | A | Correction on scrambling sequence identity for 2+4 PRBs sets in MPDCCH                                       | 14.5.0 |
| 2017-12 | RAN#78 | RP-172680 | 0404 | - | A | Correction on resource elements reserved for CRS for PBCH with repetition                                    | 14.5.0 |
| 2017-12 | RAN#78 | RP-172677 | 0405 | - | F | Introduction of new UE behavior for special subframe configuration 10                                        | 14.5.0 |
| 2017-12 | RAN#78 | RP-172691 | 0406 | - | F | Correction for PUSCH puncturing in SRS carrier switching                                                     | 14.5.0 |
| 2017-12 | RAN#78 | RP-172679 | 0407 | - | F | Correction on the scale factor for semi-OL rank-1                                                            | 14.5.0 |
| 2017-12 | RAN#78 | RP-172680 | 0409 | - | A | UE uplink gap capability signaling description                                                               | 14.5.0 |
| 2017-12 | RAN#78 | RP-172693 | 0385 | 4 | B | Introduction of shortened processing time and shortened TTI into 36.211, s03-05                              | 15.0.0 |
| 2017-12 | RAN#78 | RP-172693 | 0399 | 2 | B | Introduction of shortened processing time and shortened TTI into 36.211, s06-08                              | 15.0.0 |
| 2018-03 | RAN#79 | RP-180195 | 0400 | 1 | B | Introduction of feCoMP into 36.211                                                                           | 15.1.0 |
| 2018-03 | RAN#79 | RP-180191 | 0416 | - | A | Clarification on the NPRACH starting subcarrier partitioning for multi-tone Msg3 transmission                | 15.1.0 |
| 2018-03 | RAN#79 | RP-180189 | 0418 | - | A | Correction on CDM-8 Sequence Mapping for 24 and 32 ports                                                     | 15.1.0 |
| 2018-03 | RAN#79 | RP-180190 | 0419 | - | A | Clarification on PUSCH and PDSCH scrambling for BL/CE UEs                                                    | 15.1.0 |
| 2018-03 | RAN#79 | RP-180190 | 0420 | - | A | Clarification on the hopping parameter for PUSCH transmission corresponding to the RAR grant                 | 15.1.0 |
| 2018-03 | RAN#79 | RP-180199 | 0422 | - | A | Interference randomization in CSS                                                                            | 15.1.0 |
| 2018-03 | RAN#79 | RP-180187 | 0424 | - | A | Correction on DM-RS in DwPTS in special subframe configuration 10                                            | 15.1.0 |
| 2018-03 | RAN#79 | RP-180191 | 0427 | - | A | Clarification on NPDCCH RE mapping                                                                           | 15.1.0 |
| 2018-06 | RAN#80 | RP-181163 | 0430 | 1 | A | Correction on DMRS scrambling ID for semi-open loop transmission                                             | 15.2.0 |
| 2018-06 | RAN#80 | RP-181173 | 0431 | - | B | Introduction of enhancements for high capacity stationary wireless link and introduction of 1024 QAM for LTE | 15.2.0 |
| 2018-06 | RAN#80 | RP-181169 | 0434 | - | A | Correction on PUSCH hopping parameter for eVoLTE                                                             | 15.2.0 |
| 2018-06 | RAN#80 | RP-181181 | 0437 | - | A | Collision with NPRACH in non-anchor carriers                                                                 | 15.2.0 |
| 2018-06 | RAN#80 | RP-181181 | 0439 | - | A | On NRS presence in non-anchor carriers                                                                       | 15.2.0 |
| 2018-06 | RAN#80 | RP-181170 | 0440 | 1 | F | Corrections to sTTI and SPT implementation                                                                   | 15.2.0 |
| 2018-06 | RAN#80 | RP-181180 | 0441 | 1 | B | Introduction of enhancements to operation in unlicensed spectrum                                             | 15.2.0 |
| 2018-06 | RAN#80 | RP-181167 | 0444 | 1 | A | Clarification on CSI-RS resource aggregation                                                                 | 15.2.0 |
| 2018-06 | RAN#80 | RP-181174 | 0447 | - | B | Introduction of Even Further Enhanced MTC for LTE                                                            | 15.2.0 |
| 2018-06 | RAN#80 | RP-181166 | 0448 | - | B | Introduction Rel-15 Further NB-IoT enhancements                                                              | 15.2.0 |
| 2018-06 | RAN#80 | RP-181168 | 0449 | - | F | Correction on layer-to-port mapping for feCoMP                                                               | 15.2.0 |
| 2018-06 | RAN#80 | RP-181177 | 0450 | - | B | Introduction of HRLLC into 36.211                                                                            | 15.2.0 |
| 2018-09 | RAN#81 | RP-181792 | 0451 | - | B | Introduction of eV2X                                                                                         | 15.3.0 |
| 2018-09 | RAN#81 | RP-181796 | 0453 | - | A | Correction for interference randomization for NB-IoT                                                         | 15.3.0 |
| 2018-09 | RAN#81 | RP-181796 | 0455 | - | A | Correction to NPRS mapping                                                                                   | 15.3.0 |
| 2018-09 | RAN#81 | RP-181795 | 0456 | - | F | Correction on DL CP extension for FeLAA in 36.211                                                            | 15.3.0 |

|         |          |           |      |   |   |                                                                                                           |        |
|---------|----------|-----------|------|---|---|-----------------------------------------------------------------------------------------------------------|--------|
| 2018-09 | RAN#81   | RP-181795 | 0457 | - | F | Correction to determination of ending symbol for AUL transmissions                                        | 15.3.0 |
| 2018-09 | RAN#81   | RP-181780 | 0459 | - | A | Rate matching for aperiodic CSI-RS                                                                        | 15.3.0 |
| 2018-09 | RAN#81   | RP-181787 | 0460 | - | F | Corrections to sTTI and SPT                                                                               | 15.3.0 |
| 2018-09 | RAN#81   | RP-181791 | 0461 | - | F | Corrections to eMTC                                                                                       | 15.3.0 |
| 2018-09 | RAN#81   | RP-181783 | 0462 | - | F | Corrections to NB-IoT                                                                                     | 15.3.0 |
| 2018-09 | RAN#81   | RP-181793 | 0463 | - | F | Corrections to HRLLC                                                                                      | 15.3.0 |
| 2018-12 | RAN#82   | RP-182518 | 0465 | - | A | Correction on aperiodic CSI-RS resource mapping in 36.211                                                 | 15.4.0 |
| 2018-12 | RAN#82   | RP-182518 | 0467 | - | A | Correction to non-coded NZP CSI-RS resource configurations                                                | 15.4.0 |
| 2018-12 | RAN#82   | RP-182524 | 0468 | 1 | F | Corrections to LTE-MTC                                                                                    | 15.4.0 |
| 2018-12 | RAN#82   | RP-182519 | 0469 | 1 | F | Corrections to NB-IoT                                                                                     | 15.4.0 |
| 2018-12 | RAN#82   | RP-182518 | 0471 | - | A | Clarification on cyclic shift field mapping table for DMRS bit field in DCI format 0/4                    | 15.4.0 |
| 2018-12 | RAN#82   | RP-182526 | 0472 | - | F | Correction on rate-matching around SPDCCH resources for PDSCH repetition                                  | 15.4.0 |
| 2018-12 | RAN#82   | RP-182522 | 0473 | - | F | Correction on the number of CCEs for DMRS-based SPDCCH                                                    | 15.4.0 |
| 2018-12 | RAN#82   | RP-182522 | 0474 | - | F | Correction of SPDCCH rate-matching description                                                            | 15.4.0 |
| 2019-03 | RAN#83   | RP-190434 | 0476 | - | F | Correction of higher layer signalling for special subframe configuration 10                               | 15.5.0 |
| 2019-03 | RAN#83   | RP-190437 | 0477 | - | F | DMRS sequence index for PUSCH sub-PRB allocation for LTE-MTC                                              | 15.5.0 |
| 2019-03 | RAN#83   | RP-190436 | 0478 | - | F | CR on DMRS mapping for SPDCCH                                                                             | 15.5.0 |
| 2019-06 | RAN#84   | RP-191269 | 0479 | - | F | Correction on NPRACH baseband signal generation                                                           | 15.6.0 |
| 2019-06 | RAN#84   | RP-191270 | 0480 | - | F | Handling of invalid PRB for frequency hopping of BL/CE UEs with PUSCH CE Mode A and flexible starting PRB | 15.6.0 |
| 2019-06 | RAN#84   | RP-191272 | 0483 | - | A | Correction for PUSCH frequency hopping in eMTC                                                            | 15.6.0 |
| 2019-06 | RAN#84   | RP-191273 | 0485 | - | A | Correction for PUSCH frequency hopping in VoLTE enhancements                                              | 15.6.0 |
| 2019-09 | RAN#85   | RP-191939 | 0487 | - | F | Correction for PDSCH starting position in a subframe of FS3                                               | 15.7.0 |
| 2019-09 | RAN#85   | RP-191937 | 0490 | - | A | Clarification on localized MPDCCH DMRS port for 2+4 PRB set                                               | 15.7.0 |
| 2019-09 | RAN#85   | RP-191945 | 0491 | - | F | Correction on higher layer parameter configuring short TTI length in 36.211                               | 15.7.0 |
| 2019-09 | RAN#85   | RP-191936 | 0492 | - | F | Correction on DMRS for NPUSCH Format 2 in TDD NB-IoT                                                      | 15.7.0 |
| 2019-12 | RAN#86   | RP-192620 | 0495 | - | A | Clarification to postponing in subframes that are not BL/CE subframes                                     | 15.8.0 |
| 2019-12 | RAN#86   | RP-192618 | 0497 | - | F | PUSCH frequency hopping configured with CEModeB and flexible starting PRB allocation                      | 15.8.0 |
| 2019-12 | RAN#86   | RP-192618 | 0498 | - | F | Correction of MWUS sequence generation                                                                    | 15.8.0 |
| 2019-12 | RAN#86   | RP-192632 | 0500 | - | A | Correction on interference randomization on non-anchor carrier for NB-IoT                                 | 15.8.0 |
| 2019-12 | RAN#86   | RP-192647 | 0501 | - | B | Introduction of additional MTC enhancements for LTE                                                       | 16.0.0 |
| 2019-12 | RAN#86   | RP-192648 | 0502 | - | B | Introduction of Additional enhancements for NB-IoT                                                        | 16.0.0 |
| 2019-12 | RAN#86   | RP-192649 | 0503 | - | B | Introduction of DL MIMO efficiency enhancements for LTE                                                   | 16.0.0 |
| 2019-12 | RAN#86   | RP-192650 | 0504 | - | B | Introduction of LTE terrestrial broadcast                                                                 | 16.0.0 |
| 2020-03 | RAN#87-e | RP-200202 | 0507 | - | A | Correction on the resource block pair definition for 1.25 kHz subcarrier spacing                          | 16.1.0 |
| 2020-03 | RAN#87-e | RP-200178 | 0509 | - | A | Correction on Rel-15 NWUS/MWUS                                                                            | 16.1.0 |
| 2020-03 | RAN#87-e | RP-200196 | 0510 | - | F | Miscellaneous corrections for Rel-16 LTE-MTC features in 36.211                                           | 16.1.0 |

|         |          |           |      |   |   |                                                                      |        |
|---------|----------|-----------|------|---|---|----------------------------------------------------------------------|--------|
| 2020-03 | RAN#87-e | RP-200197 | 0511 | - | F | Miscellaneous corrections for Rel-16 NB-IoT features in 36.211       | 16.1.0 |
| 2020-03 | RAN#87-e | RP-200199 | 0512 | - | F | Corrections to LTE terrestrial broadcast                             | 16.1.0 |
| 2020-03 | RAN#87-e | RP-200198 | 0513 | - | F | Corrections to DL MIMO efficiency enhancements for LTE               | 16.1.0 |
| 2020-06 | RAN#88-e | RP-200704 | 0518 | - | A | Correction on NRS presence in non-anchor carriers for NB-IoT         | 16.2.0 |
| 2020-06 | RAN#88-e | RP-200681 | 0519 | - | A | CR on WUS transmission in TDD special subframe                       | 16.2.0 |
| 2020-06 | RAN#88-e | RP-200681 | 0525 | - | A | CR on clarification of RSS transmission                              | 16.2.0 |
| 2020-06 | RAN#88-e | RP-200681 | 0527 | - | A | CR on scrambling initialization for sub-PRB PUSCH                    | 16.2.0 |
| 2020-06 | RAN#88-e | RP-200703 | 0532 | - | A | Correction on MBSFN region start symbol index of a MBSFN subframe    | 16.2.0 |
| 2020-06 | RAN#88-e | RP-200699 | 0533 | - | F | Corrections for Rel-16 NB-IoT features in 36.211                     | 16.2.0 |
| 2020-06 | RAN#88-e | RP-200701 | 0534 | 1 | F | Corrections to LTE terrestrial broadcast                             | 16.2.0 |
| 2020-06 | RAN#88-e | RP-200698 | 0535 | - | F | Corrections to Rel-16 LTE-MTC features in 36.211                     | 16.2.0 |
| 2020-06 | RAN#88-e | RP-200700 | 0536 | 1 | F | Corrections to DL MIMO efficiency enhancements for LTE               | 16.2.0 |
| 2020-09 | RAN#89-e | RP-201821 | 0538 | - | A | Correction on semi-open-loop                                         | 16.3.0 |
| 2020-09 | RAN#89-e | RP-201818 | 0539 | - | F | Correction for PBCH repetition                                       | 16.3.0 |
| 2020-09 | RAN#89-e | RP-201818 | 0540 | - | F | Correction on MBSFN region                                           | 16.3.0 |
| 2020-09 | RAN#89-e | RP-201816 | 0541 | - | F | Corrections on NPDSCH/NPDCCH interference randomization              | 16.3.0 |
| 2020-09 | RAN#89-e | RP-201816 | 0542 | - | F | Correction on NPDSCH                                                 | 16.3.0 |
| 2020-09 | RAN#89-e | RP-201817 | 0543 | - | F | Correction on higher layer parameters for additional SRS in 36.211   | 16.3.0 |
| 2020-09 | RAN#89-e | RP-201817 | 0544 | - | F | Correction on terminology of additional SRS                          | 16.3.0 |
| 2020-09 | RAN#89-e | RP-201815 | 0545 | - | F | Multi-TB scheduling and PUR spanning PUSCH transmission in LTE-MTC   | 16.3.0 |
| 2020-09 | RAN#89-e | RP-201816 | 0546 | - | F | Correction on terms and higher layer parameters for NB-IoT in 36.211 | 16.3.0 |
| 2020-12 | RAN#90-e | RP-202394 | 0547 | - | F | CR on LTE-based 5G Terrestrial Broadcast                             | 16.4.0 |
| 2020-12 | RAN#90-e | RP-202394 | 0548 | - | F | Correction for 0.37kHz SCS                                           | 16.4.0 |
| 2020-12 | RAN#90-e | RP-202400 | 0550 | - | A | Corrections on interference randomization for NB-IoT SPS             | 16.4.0 |
| 2020-12 | RAN#90-e | RP-202393 | 0551 | - | F | Corrections on additional SRS symbols                                | 16.4.0 |
| 2020-12 | RAN#90-e | RP-202391 | 0552 | - | F | Alignment corrections for Rel-16 features                            | 16.4.0 |
| 2021-03 | RAN#91-e | RP-210060 | 0554 | - | A | Correction for support of 1024QAM for PDSCH                          | 16.5.0 |
| 2021-06 | RAN#92-e | RP-211241 | 0555 | - | F | Clarification of PUSCH PRB resources for PUR in LTE-MTC              | 16.6.0 |
| 2021-06 | RAN#92-e | RP-211242 | 0556 | - | F | Correction on DMRS cyclic shift for PUR in NB-IoT                    | 16.6.0 |
| 2021-06 | RAN#92-e | RP-211246 | 0557 | - | F | Correction for 0.37kHz SCS                                           | 16.6.0 |
| 2021-09 | RAN#93-e | RP-211848 | 0559 | 1 | F | Correction on PUSCH cyclic shift for eMTC PUR                        | 16.7.0 |
| 2021-09 | RAN#93-e | RP-211849 | 0561 | - | A | Clarification on NPUSCH postponement for NB-IoT                      | 16.7.0 |
| 2021-12 | RAN#94-e | RP-212974 | 0562 | - | B | Introduction of additional enhancements for NB-IoT and LTE-MTC       | 17.0.0 |
| 2021-12 | RAN#94-e | RP-212976 | 0563 | - | B | Introduction of NB-IoT/eMTC support in Non-Terrestrial Networks      | 17.0.0 |

|         |          |           |      |   |   |                                                                                                               |        |
|---------|----------|-----------|------|---|---|---------------------------------------------------------------------------------------------------------------|--------|
| 2021-12 | RAN#94-e | RP-212975 | 0564 | - | B | Introduction of new bandwidths for LTE-based 5G terrestrial broadcast                                         | 17.0.0 |
| 2022-03 | RAN#95-e | RP-220260 | 0566 | - | F | Correction to NB-IoT and LTE-MTC over NTN                                                                     | 17.1.0 |
| 2022-03 | RAN#95-e | RP-220258 | 0567 | - | F | Correction to additional enhancements for NB-IoT and eMTC                                                     | 17.1.0 |
| 2022-06 | RAN#96   | RP-221609 | 0568 | - | F | Correction to NB-IoT and LTE-MTC over NTN                                                                     | 17.2.0 |
| 2022-06 | RAN#96   | RP-221608 | 0569 | - | F | Correction to additional enhancements for NB-IoT and eMTC                                                     | 17.2.0 |
| 2023-03 | RAN#99   | RP-230448 | 0571 | - | F | CR on correction of UE capability parameter name in 36.211                                                    | 17.3.0 |
| 2023-09 | RAN#101  | RP-232454 | 0573 | - | A | Correction on SRS identity for additional SRS symbols                                                         | 17.4.0 |
| 2024-03 | SA#103   |           |      |   |   | Update to Rel-18 version (MCC)                                                                                | 18.0.0 |
| 2024-04 | SA#103   |           |      |   |   | MCC correction as v18.0.0 was promoted from v17.0.0 instead of the latest version of the spec, namely v17.4.0 | 18.0.1 |
| 2025-06 | RAN#108  | RP-251589 | 0574 | - | B | Introduction of IoT_NTN_Ph3                                                                                   | 19.0.0 |
| 2025-06 | RAN#108  | RP-251569 | 0575 | - | B | Introduction of IoT_NTN_TDD                                                                                   | 19.0.0 |
| 2025-06 | RAN#108  | RP-251570 | 0576 | - | B | Introduction of LTE-based 5G Broadcast Phase 2                                                                | 19.0.0 |
| 2025-09 | RAN#109  | RP-252634 | 0577 | 1 | B | Introduction of TEI19 for LTE-based 5G Broadcast [5GB CSMuting]                                               | 19.1.0 |
| 2025-09 | RAN#109  | RP-252638 | 0578 | - | F | Corrections to IoT_NTN_Ph3                                                                                    | 19.1.0 |
| 2025-09 | RAN#109  | RP-252624 | 0579 | - | F | Corrections to IoT_NTN_TDD                                                                                    | 19.1.0 |
| 2025-09 | RAN#109  | RP-252625 | 0580 | - | F | Corrections to LTE_terr_bcast_Ph2                                                                             | 19.1.0 |

---

# History

| Version | Date         | Status      |
|---------|--------------|-------------|
| V19.1.0 | October 2025 | Publication |
|         |              |             |
|         |              |             |
|         |              |             |
|         |              |             |