

Final draft **ETSI EN 301 025-1** V1.3.1 (2006-09)

European Standard (Telecommunications series)

**Electromagnetic compatibility
and Radio spectrum Matters (ERM);
VHF radiotelephone equipment for general communications
and associated equipment for Class "D"
Digital Selective Calling (DSC);
Part 1: Technical characteristics and
methods of measurement**



ReferenceREN/ERM-TG26-074-1

Keywordsmaritime, radio, traffic, VHF

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2006.
All rights reserved.

DECTTM, **PLUGTESTS**TM and **UMTS**TM are Trade Marks of ETSI registered for the benefit of its Members.
TIPHONTM and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPPTM is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Contents

Intellectual Property Rights	9
Foreword.....	9
1 Scope	10
2 References	10
3 Definitions, symbols and abbreviations	11
3.1 Definitions	11
3.2 Symbols.....	11
3.3 Abbreviations	11
4 General and operational requirements.....	12
4.1 General	12
4.2 Composition	12
4.3 Construction	12
4.4 Controls and indicators.....	13
4.5 Facilities for coding and decoding of DSC	13
4.5.1 Call functions.....	13
4.5.2 MANUAL calls	14
4.5.3 Distress calls	14
4.5.4 ALL SHIPS calls	15
4.5.5 Incoming calls.....	15
4.5.6 Other calls.....	15
4.6 DSC display.....	15
4.7 Handset and loudspeaker.....	15
4.8 Safety precautions	16
4.9 Labelling.....	16
4.10 Warm up.....	16
5 Technical requirements	16
5.1 Switching time.....	16
5.2 Class of emission and modulation characteristics	16
5.3 Facilities for DSC transmission and reception	16
5.3.1 General.....	16
5.3.2 Decoding.....	17
5.3.3 Free channel transmission.....	17
5.3.4 Automatic acknowledgement.....	17
5.3.5 Automatic re-transmission of distress calls	17
5.4 Ships identity - MMSI and Group MMSI	17
5.5 Entry of position information	18
5.6 Alarm circuits.....	18
5.6.1 Distress and urgency.....	18
5.6.2 Other categories	18
5.6.3 Acoustic alarms	18
5.6.4 Cancellation of alarms	18
5.7 Multiple watch facilities	18
5.7.1 General.....	18
5.7.2 Scanning provisions	19
5.7.3 Scanning characteristics.....	19
6 General conditions of measurement	19
6.1 Arrangements for test signals applied to the receiver input.....	19
6.2 Squelch.....	20
6.3 Transmission time limitation	20
6.4 Normal test modulation	20
6.5 Artificial antenna.....	20
6.6 Arrangements for test signals applied to the transmitter input	20
6.7 Test channels.....	20

6.8	Generation and examination of the digital selective call signal	20
6.9	Standard test signals for DSC	21
6.10	Determination of the symbol error ratio in the output of the receiving part	21
6.11	Measurement uncertainty and interpretation of the measured results	21
6.11.1	Measurement uncertainty	21
6.11.2	Interpretation of the measurement results	22
6.12	Test conditions, power sources, and ambient temperatures	22
6.12.1	Normal and extreme test conditions	22
6.12.2	Test power source	22
6.13	Normal test conditions	22
6.13.1	Normal temperature and humidity	22
6.13.2	Normal power sources	22
6.13.2.1	Battery power source	22
6.13.2.2	Other power sources	23
6.14	Extreme test conditions	23
6.14.1	Extreme temperatures	23
6.14.2	Extreme values of test power sources	23
6.14.2.1	Battery power source	23
6.14.2.2	Other power sources	23
6.15	Procedure for tests at extreme temperatures	23
7	Environmental tests	23
7.1	Introduction	23
7.2	Procedure	23
7.3	Performance check	24
7.4	Vibration test	24
7.4.1	Definition	24
7.4.2	Method of measurement	24
7.4.3	Requirement	25
7.5	Temperature tests	25
7.5.1	Definition	25
7.5.2	Dry heat	25
7.5.2.1	Definition	25
7.5.2.2	Method of measurement	25
7.5.2.3	Requirement	25
7.5.3	Damp heat	25
7.5.3.1	Definition	25
7.5.3.2	Method of measurement	25
7.5.3.3	Requirement	25
7.5.4	Low temperature	26
7.5.4.1	Definition	26
7.5.4.2	Method of measurement	26
7.5.4.3	Requirement	26
8	Transmitter	26
8.1	Frequency error	26
8.1.1	Definition	26
8.1.2	Method of measurement	26
8.1.3	Limits	26
8.2	Carrier power	26
8.2.1	Definition	26
8.2.2	Method of measurement	27
8.2.3	Limits	27
8.2.3.1	Normal test conditions	27
8.2.3.2	Extreme test conditions	27
8.3	Frequency deviation	27
8.3.1	Definition	27
8.3.2	Maximum permissible frequency deviation	27
8.3.2.1	Method of measurement	27
8.3.2.2	Limits	27
8.3.3	Reduction of frequency deviation at modulation frequencies above 3 kHz	28
8.3.3.1	Method of measurement	28

8.3.3.2	Limits	28
8.4	Sensitivity of the modulator, including microphone	29
8.4.1	Definition	29
8.4.2	Method of measurement	29
8.4.3	Limits	29
8.5	Audio frequency response	29
8.5.1	Definition	29
8.5.2	Method of measurement	29
8.5.3	Limit	29
8.6	Audio frequency harmonic distortion of the emission	30
8.6.1	Definition	30
8.6.2	Method of measurement	30
8.6.2.1	Normal test conditions	30
8.6.2.2	Extreme test conditions	30
8.6.3	Limits	31
8.7	Adjacent channel power	31
8.7.1	Definition	31
8.7.2	Method of measurement	31
8.7.3	Limits	31
8.8	Conducted spurious emissions conveyed to the antenna	32
8.8.1	Definition	32
8.8.2	Method of measurement	32
8.8.3	Limit	32
8.9	Cabinet radiation and conducted spurious emissions other than those conveyed to the antenna	32
8.9.1	Definitions	32
8.9.2	Method of measurement	32
8.9.3	Limits	33
8.10	Transient frequency behaviour of the transmitter	33
8.10.1	Definitions	33
8.10.2	Method of measurement	34
8.10.3	Limits	36
8.11	Residual modulation of the transmitter	36
8.11.1	Definition	36
8.11.2	Method of measurement	36
8.11.3	Limit	36
8.12	Frequency error (demodulated DSC signal)	36
8.12.1	Definition	36
8.12.2	Method of measurement	37
8.12.3	Limits	37
8.13	Modulation index for DSC	37
8.13.1	Definition	37
8.13.2	Method of measurement	37
8.13.3	Limits	37
8.14	Modulation rate for DSC	37
8.14.1	Definition	37
8.14.2	Method of measurement	37
8.14.3	Limits	37
8.15	Testing of generated call sequences	38
8.15.1	Definition	38
8.15.2	Method of measurement	38
8.15.3	Requirement	38
8.16	Testing of free channel transmission on DSC channel 70	38
8.16.1	Definition	38
8.16.2	Method of measurement	38
8.16.3	Requirement	38
9	Radiotelephone receiver	39
9.1	Harmonic distortion and rated audio-frequency output power	39
9.1.1	Definition	39
9.1.2	Methods of measurement	39
9.1.3	Limits	39
9.2	Audio frequency response	39

9.2.1	Definition.....	39
9.2.2	Method of measurement	39
9.2.3	Limits.....	40
9.3	Maximum usable sensitivity.....	40
9.3.1	Definition.....	40
9.3.2	Method of measurement	40
9.3.3	Limits.....	41
9.4	Co-channel rejection.....	41
9.4.1	Definition.....	41
9.4.2	Method of measurement	41
9.4.3	Limit	41
9.5	Adjacent channel selectivity.....	41
9.5.1	Definition.....	41
9.5.2	Method of measurement	42
9.5.3	Limits.....	42
9.6	Spurious response rejection.....	42
9.6.1	Definition.....	42
9.6.2	Method of measurement	42
9.6.3	Limit	42
9.7	Intermodulation response	43
9.7.1	Definition.....	43
9.7.2	Method of measurement	43
9.7.3	Limit	43
9.8	Blocking or desensitization	43
9.8.1	Definition.....	43
9.8.2	Method of measurement	43
9.8.3	Limit	44
9.9	Spurious emissions	44
9.9.1	Definition.....	44
9.9.2	Method of measuring the power level	44
9.9.3	Limit	44
9.10	Receiver radiated spurious emissions.....	44
9.10.1	Definition.....	44
9.10.2	Method of measurements.....	44
9.10.3	Limit	45
9.11	Receiver residual noise level.....	45
9.11.1	Definition.....	45
9.11.2	Method of measurement	45
9.11.3	Limit	45
9.12	Squelch operation.....	46
9.12.1	Definition.....	46
9.12.2	Method of measurement	46
9.12.3	Limits.....	46
9.13	Squelch hysteresis	46
9.13.1	Definition.....	46
9.13.2	Method of measurement	47
9.13.3	Limit	47
9.14	Multiple watch characteristic	47
9.14.1	Definition.....	47
9.14.2	Method of measurement	47
9.14.3	Limits.....	47
10	Receiver for DSC decoder.....	48
10.1	Maximum usable sensitivity.....	48
10.1.1	Definition.....	48
10.1.2	Method of measurement	48
10.1.3	Limits.....	48
10.2	Co-channel rejection.....	48
10.2.1	Definition.....	48
10.2.2	Method of measurement	48
10.2.3	Limits.....	48
10.3	Adjacent channel selectivity.....	48

10.3.1	Definition.....	48
10.3.2	Method of measurement	49
10.3.3	Limits.....	49
10.4	Spurious response and blocking immunity.....	49
10.4.1	Definition.....	49
10.4.2	Method of measurement	49
10.4.3	Limits.....	49
10.5	Intermodulation response	50
10.5.1	Definition.....	50
10.5.2	Method of measurement	50
10.5.3	Limits.....	50
10.6	Dynamic range	50
10.6.1	Definition.....	50
10.6.2	Method of measurement	50
10.6.3	Limit	50
10.7	Spurious emissions	50
10.7.1	Definition.....	50
10.7.2	Method of measuring the power level	51
10.7.3	Limit	51
10.8	Verification of correct decoding of various types of DSC calls	51
10.8.1	Definition.....	51
10.8.2	Method of measurement	51
10.8.3	Requirement.....	51
10.9	Reaction to VTS and AIS channel management DSC transmissions	51
10.9.1	Definition.....	51
10.9.2	Method of measurement	52
10.9.3	Requirement.....	52
10.10	Simultaneous reception	52
10.10.1	Definition.....	52
10.10.2	Method of measurement	52
10.10.3	Limits.....	52
11	Electromagnetic compatibility	52
11.1	Emissions and immunity tests	52
Annex A (normative):	DSC Calls	53
Annex B (normative):	Measuring receiver for adjacent channel power measurement.....	54
B.1	Power measuring receiver specification.....	54
B.1.1	IF filter	54
B.1.2	Attenuation indicator	55
B.1.3	r.m.s. value indicator	55
B.1.4	Oscillator and amplifier.....	55
Annex C (normative):	Radiated measurement.....	56
C.1	Test sites and general arrangements for measurements involving the use of radiated fields	56
C.1.1	Anechoic chamber.....	56
C.1.2	Anechoic chamber with a ground plane	57
C.1.3	OATS	58
C.1.4	Test antenna.....	59
C.1.5	Substitution antenna	59
C.1.6	Measuring antenna	60
C.2	Guidance on the use of radiation test sites	60
C.2.1	Verification of the test site	60
C.2.2	Preparation of the EUT.....	60
C.2.3	Power supplies to the EUT	60
C.2.4	Volume control setting for analogue speech tests	60
C.2.5	Range length.....	61
C.2.6	Site preparation	61
C.3	Coupling of signals.....	62

C.3.1	General	62
C.3.2	Data signals	62
C.3.3	Speech and analogue signals	62
C.3.3.1	Acoustic coupler description.....	62
C.3.3.2	Calibration	63
Annex D (informative):	Description of the equipment.....	64
History		65

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM), and is now submitted for the ETSI standards One-step Approval Procedure.

The present document is part 1 of a multi-part deliverable covering the Electromagnetic compatibility and Radio spectrum Matters (ERM); VHF radiotelephone equipment for general communications and associated equipment for Class "D" Digital Selective Calling (DSC), as identified below:

- Part 1: "Technical characteristics and methods of measurement";**
- Part 2: "Harmonized EN under article 3.2 of the R&TTE Directive";
- Part 3: "Harmonized EN under article 3.3 (e) of the R&TTE Directive".

Proposed national transposition dates	
Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	6 months after doa

1 Scope

The present document covers the minimum requirements for general communication for shipborne fixed installations using a VHF radiotelephone operating in certain frequency bands allocated to the maritime mobile service using both 25 kHz and 12,5 kHz channels with associated equipment for DSC - class D.

These requirements include the relevant provisions of the ITU Radio Regulations, appendix 18 [1], ITU-R Recommendation M.493-11 [5] (where class D is defined), M.825-3 [8] and incorporate the relevant guidelines of the IMO as detailed in MSC/Circ.803 [9].

The present document also specifies technical characteristics, methods of measurement and required test results.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

- [1] ITU Radio Regulations (2004), appendix 18: "Table of transmitting frequencies in the VHF maritime mobile band".
- [2] ITU-T Recommendation E.161 (2001): "Arrangement of digits, letters and symbols on telephones and other devices that can be used for gaining access to a telephone network".
- [3] ITU-T Recommendation O.41 (1994): "Psophometer for use on telephone-type circuits".
- [4] CENELEC EN 61162-1 (2000): "Maritime navigation and radiocommunication equipment and systems - Digital interfaces - Part 1: Single talker and multiple listeners".
- [5] ITU-R Recommendation M.493-11 (2004): "Digital selective-calling system for use in the maritime mobile service".
- [6] ETSI TR 100 028 (all parts): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics".
- [7] ITU-R Recommendation SM 332-4: "Selectivity of receivers".
- [8] ITU-R Recommendation M.825-3 (1998): "Characteristics of a transponder system using digital selective calling techniques for use with vessel traffic services and ship-to-ship identification".
- [9] MSC/Circ.803: "Participation of non-SOLAS ships in the Global Maritime Distress and Safety System (GMDSS)".
- [10] ITU-R Recommendation M.821-1 (1997): "Optional expansion of the digital selective-calling system for use in the maritime mobile service".
- [11] ITU-R Recommendation M.1371-1 (2001): "Technical characteristics for a universal shipborne automatic identification system using time division multiple access in the VHF maritime mobile band".
- [12] ETSI EN 301 843-2 (V1.2.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for marine radio equipment and services; Part 2: Specific conditions for VHF radiotelephone transmitters and receivers".

- [13] ITU-R Recommendation M.1084-4 (2001): "Interim solutions for improved efficiency in the use of the band 156-174 MHz by stations in the maritime mobile service".
- [14] IEC 60489-3: "Methods of measurement for radio equipment used in the mobile services; Part 3: Receivers for A3E or F3E emissions" Edition 2.0 (1988) appendix F".
- [15] ANSI C63.5 (1988): "American National Standard for Calibration of Antennas Used for Radiated Emission Measurements in Electromagnetic Interference (EMI) Control".
- [16] ETSI TR 102 273 (all parts): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Improvement on Radiated Methods of Measurement (using test site) and evaluation of the corresponding measurement uncertainties Part 1: Uncertainties in the measurement of mobile radio".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

block: to inhibit a function by making it inaccessible from the user interface

carrier frequency: frequency to which the transmitter or receiver is tuned

class D: intended to provide minimum facilities for VHF DSC distress, urgency and safety as well as routine calling and reception, not necessarily in full accordance with IMO GMDSS carriage requirements for VHF installations (ITU-R Recommendation M.493-11 [5])

frequency deviation: difference between the instantaneous frequency of the modulated RF signal and the carrier frequency

G2B: phase-modulation with digital information, with a sub-carrier for DSC operation

G3E: phase-modulation (frequency modulation with a pre-emphasis of 6 dB/octave) for speech

modulation index: ratio between the frequency deviation and the frequency of the modulation signal

3.2 Symbols

For the purposes of the present document, the following symbols apply:

λ lambda (wavelength)

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ad	amplitude difference
AIS	universal shipborne Automatic Identification System
DSC	Digital Selective Calling
e.m.f.	electromotive force
EPIRB	Emergency Position Indicating Radio Beacon
EUT	Equipment Under Test
fd	frequency difference
FM	Frequency Modulation
GGA	Global positioning system fixed data
GLL	Geographic position Latitude/Longitude
GNS	Global Navigation System
GPS	Global Positioning System
IF	Intermediate Frequency

MMSI	Maritime Mobile Service Identity
OATS	Open Area Test Site
ppm	parts per million
r.m.s.	root mean square
RF	Radio Frequency
RMC	Recommended Minimum specific GPS/transit data
SINAD	Signal + Noise + Distortion to Noise + Distortion
VHF	Very High Frequency
VSWR	Voltage Standing Wave Ratio
VTSS	Vessel Traffic System

4 General and operational requirements

4.1 General

The manufacturer shall declare that compliance to the requirements of clause 4 is achieved and shall provide relevant documentation.

4.2 Composition

The equipment shall, as a minimum, include:

- a VHF radiotelephone transmitter;
- a VHF radiotelephone receiver;
- a dedicated channel 70 watchkeeping receiver for DSC decoder;
- a DSC encoder; and
- a DSC decoder.

4.3 Construction

All controls shall be of sufficient size to enable the usual control functions to be easily performed and the number of controls should be the minimum necessary for simple and satisfactory operation.

Adequately detailed operating instructions shall be provided with the equipment.

The equipment shall be capable of operating on single frequency and two-frequency channels with manual control (simplex).

The equipment shall be able to operate on all channels defined in appendix 18 to the Radio Regulations [1], noting in particular footnotes m) and e) .

Additional VHF channels for maritime use outside those defined by appendix 18 to the Radio Regulations may also be provided where permitted by relevant administrations. These channels shall be clearly identified for use as relating to the relevant administration(s) and accessed through a positive action(s) for enabling use of these channel(s) but means shall be provided to block any or all of these additional channels if required by the relevant administration(s).

If 12,5 kHz channels are implemented in the equipment it shall be in accordance with ITU-R Recommendation M.1084-4 [13].

The equipment shall be so designed that use of channel 70 for purposes other than DSC is prevented, and that use of channels AIS1 and AIS2 for purposes other than AIS is prevented.

It shall not be possible to transmit while any frequency synthesizer used within the transmitter is out of lock.

It shall not be possible to transmit during channel switching operations.

4.4 Controls and indicators

The user shall not have access to any control which, if wrongly set, might impair the technical characteristics of the equipment.

If the equipment can be operated from more than one position, the control unit provided at the position from where the vessel is normally navigated shall have priority and the individual control units shall be provided with an indicator showing whether the equipment is in operation.

The following controls or functions shall be provided:

- DISTRESS BUTTON (see clause 4.5.3): the default shall be an undesignated distress message;
- CALL (see clause 4.5.1): the default (initial display) shall be an individual call;
- CANCEL: to revert to the initial display or to silence the aural alarm and visual indication used to indicate receipt of a DSC alert. The cancel function shall take place automatically after a maximum of 5 min of inactivity;
- ENTER/Accept/OK: for accepting a menu item;
- a means of easily entering MMSI for calling and manual position information. If a numeric key pad is provided this shall conform to ITU-T Recommendation E.161 [2];
- ALPHA - NUMERIC DISPLAY (see clause 4.5);
- on/off switch for the entire installation with a visual indication that the installation is in operation:
- a manual non-locking push-to-talk switch to operate the transmitter with a visual indication that the transmitter is activated and facilities to limit the transmission time to a maximum of 5 min. A short audible alarm and a visual indication may be provided to show when the transmission will be automatically terminated within the next 10 s. It shall be possible to reoperate the push to talk switch and reactivate the transmitter after a 10 s period;
- a switch for reducing transmitter output power to no more than 1 W, on both telephony and DSC, with a visual indication that low power is selected;
- an audio-frequency power volume control;
- a squelch control;
- a control for dimming to extinction the equipment illumination with the exception of a visual indicator (see clause 4.5.3);
- controls for multiple watch facilities, if provided (see clause 5.7).

The equipment shall have means to select manually a channel and shall indicate the designator (where applicable), as shown in appendix 18 to the Radio Regulations [1], of the channel at which the installation is set. The channel designator shall be legible irrespective of the external lighting conditions.

Channel 16 shall be distinctively marked. Selection of channel 16, shall be preferably by readily accessible means (e.g. a distinctively marked key). Selection of channel 16 by any means shall automatically set the transmitter output power to maximum. This power level may subsequently be reduced by manual user control if required.

Where the capability for automatically switching a radiotelephone channel on receipt of a DSC call exists, a means for disabling that capability should be provided. This capability should be provided for all calls other than individual station calls of category distress or urgency.

4.5 Facilities for coding and decoding of DSC

4.5.1 Call functions

The facilities for coding and composition of calls shall be so arranged that it is possible for the operator quickly and precisely to enter a call. The types of DSC calls provided in this equipment are specified in annex A.

The CALL functions (see clause 4.4) shall permit selection of the following functions:

- INDIVIDUAL: for making a call to a specific MMSI;
- GROUP: for making a call to a specific Group MMSI (see clause 5.4);
- ALL SHIPS URGENCY/SAFETY: for making all ships calls;
- RECEIVED CALLS: for retrieving stored incoming DSC calls;
- OTHER: for equipment housekeeping functions.

If INDIVIDUAL is selected, either a MANUAL call (see clause 4.5.2) or a DIRECTORY call shall be selected. The DIRECTORY list shall have a facility for at least 10 entries. Their MMSIs shall be programmable.

4.5.2 MANUAL calls

The MANUAL call facility shall permit the entry of a MMSI. If the called station is a coast station (i.e. MMSI commencing 00) no further information shall be requested from the operator. If the called station is a ship station the equipment shall request input of a channel number. The equipment shall assist the operator by suggesting a suitable inter-ship channel.

NOTE: In appendix 18 of the Radio Regulations channels 6, 8, 72 and 77 are reserved solely for intership communications. Channels 9, 10, 13, 15, 17, 67, 69 and 73 may also be used for intership communications but are also available for port operations and ship movement.

4.5.3 Distress calls

It shall only be possible to transmit distress DSC calls by means of a single dedicated button which is used for no other purpose. This button shall not be any key of ITU-T Recommendation E.161 [2] digital input panel or an ISO keyboard provided on the equipment. This button shall be red in colour and marked "DISTRESS" and protected against inadvertent operation with an individual, non-removable, spring loaded cover. Where a non-transparent protective lid or cover is used, it shall also be marked "DISTRESS". It shall not be necessary for the user to remove seals or to break the lid or cover in order to operate the distress button.

The operation of the distress button shall generate a visible and audible indication (see clause 5.6.3). The distress button shall be kept pressed for at least 3 s. A flashing light and an intermittent acoustic signal shall start immediately. After the 3 s, the transmission of the distress alert is initiated and the indication becomes steady.

The distress alert initiation shall require at least two independent actions. Lifting the protective lid or cover is considered as the first action. Pressing the distress button is considered as the second independent action.

It shall also be possible to manually compose a distress alert, in which case the default nature of distress shall be the undesignated distress. Distress alerts whether default or manually composed shall only be transmitted by keying the distress button.

The equipment shall be capable of receiving and displaying any designated nature of distress, but shall not be capable of transmitting a nature of distress of EPIRB (symbol 112), see ITU-R Recommendation M.493-11 [5].

Initiation of a distress call shall automatically have priority over any other operation of the equipment. The equipment shall automatically select channel 70 and the maximum transmitter power.

The distress call shall automatically be transmitted five times in succession with no intervals between the individual calls so that bit synchronization between the transmitter and receiver of the call can be maintained. Each call shall include the appropriate dot pattern.

Following the distress call sequence, a DSC expansion message giving enhanced position resolution according to ITU-R Recommendation M.821-1 [10] shall be transmitted.

After the transmission of the distress call sequence including the DSC expansion message the equipment shall automatically tune to channel 16 and select the maximum transmitter power.

4.5.4 ALL SHIPS calls

It shall only be possible to transmit ALL SHIPS URGENCY and ALL SHIPS SAFETY calls by means of deliberate actions, such as two levels of menu instructions.

After the transmission of the all ships call, the equipment shall automatically tune to channel 16 and select the maximum transmitter power.

4.5.5 Incoming calls

The DSC equipment shall be provided with suitable facilities for converting incoming calls with relevant address content to visual form in plain language. The contents of at least the last 10 received DSC calls shall be stored until read manually from the RECEIVED CALL menu.

In the case of an incompatible working channel request, the unit shall reply "Unable to comply" with 104 as the first telecommand and 108 as the second telecommand.

In the case of a received individual call, the radio shall be capable of identifying if the requested working channel identified in the call is programmed in memory.

If this channel is programmed the radio shall display the call details and compose an "Able to comply" acknowledgement which shall only be transmitted manually. Switching to the channel identified shall only be performed after a manual "Able to comply" acknowledgement has been transmitted.

If this channel is not programmed the radio shall display the call details and compose an "Unable to comply" acknowledgement with 104 as the first telecommand and 108 as the second telecommand. This acknowledgement may be automatic.

In the case of incoming distress and urgency calls the radiotelephone shall be capable of switching to channel 16 and automatically selecting the maximum transmitter power.

4.5.6 Other calls

If automatic response to polling or position reporting calls is included, means for disabling those responses shall be provided.

4.6 DSC display

The equipment shall be provided with facilities which show the functions currently available, prompts the operator if an incorrect operation is attempted, displays error messages and displays incoming and logged calls.

The equipment shall be provided with facilities for visual indication, and possible manual correction of the user programmable information content of the call before the call is sent.

There shall be an indication that received incoming messages are present in memory.

Display of geographic position and time shall be readily available. The equipment shall be provided with facilities to display the last entered position.

For DSC displays located on the handset, the display should be easily read from a distance of 40 cm. For DSC displays located on the transceiver unit, the display should be easily read from 85 cm.

The DSC display must be capable of continuously displaying a complete enhanced position according to ITU-R Recommendation M.821-1 [10].

4.7 Handset and loudspeaker

The equipment shall be fitted with a telephone handset or microphone, and an integral loudspeaker and/or a socket for an external loudspeaker. Where there are connections to external loudspeakers, these shall also relay acoustic alarms.

During transmission in simplex operation the receiver output shall be muted.

4.8 Safety precautions

Measures shall be taken to protect the equipment against the effects of excessive current or excessive voltage.

Measures shall be taken to prevent any damage that might arise from an accidental reversal of polarity of the electrical power source.

Means shall be provided for earthing exposed metallic parts of the equipment.

No damage to the equipment shall occur when the antenna terminals are placed on open circuit or short circuit for the period permitted by the push-to-talk switch in clause 4.4.

In order to provide protection against damage due to the build-up of static voltages at the antenna terminals, there shall be a d.c. path from the antenna terminals to chassis not exceeding 100 k Ω .

The information in programmable memory devices and the vessel's identity and information inherent to the DSC process shall be stored in non-volatile memory devices.

4.9 Labelling

All controls, instruments, indicators and terminals shall be clearly labelled.

Details of the power supply from which the equipment is intended to operate shall be clearly indicated on the equipment together with the serial number of the equipment.

All units of the equipment shall be clearly marked on the exterior with the identification of the manufacturer and type designation of the equipment.

The compass safe distance shall be stated on the equipment or in the user document.

4.10 Warm up

After being switched on, the equipment shall be operational within 5 s.

5 Technical requirements

5.1 Switching time

The channel switching arrangement shall be such that the time necessary to manually change over from using one of the channels to using any other channel does not exceed 5 s.

The time necessary to change over from transmission to reception or vice versa, shall not exceed 0,3 s.

5.2 Class of emission and modulation characteristics

The equipment shall use phase modulation, G3E (frequency modulation with pre-emphasis of 6 dB/octave) for speech, and G2B for DSC signalling.

The equipment shall be designed to operate with a channel separations of both 12,5 kHz and 25 kHz.

5.3 Facilities for DSC transmission and reception

5.3.1 General

The equipment shall comprise the necessary facilities for coding and transmission of DSC on channel 70 and for decoding and conversion of the information content of received DSC to visual form in plain language.

The equipment may be either:

- a) an independent unit for connection to an associated radiotelephone; or
- b) mechanically and electrically integrated in such radio equipment.

However in both cases the DSC equipment shall be capable of automatic channel switching in the radio equipment.

The watchkeeping receiver part of the DSC equipment shall be designed for continuous operation on channel 70 but the receiver need not operate when the transmitter is in use.

5.3.2 Decoding

The DSC equipment shall be so designed that in the decoding process use shall be made of parity bits for error detection, time diversity repetitions and error check characters in the received call as specified in ITU-R Recommendation M.493-11 [5].

5.3.3 Free channel transmission

The DSC equipment shall be provided with facilities which, except for distress calls, automatically delay the transmission of DSC until the calling channel 70 is free.

5.3.4 Automatic acknowledgement

The equipment shall not be provided with facilities for automatic transmission of acknowledgements (see clause 4.5.5).

5.3.5 Automatic re-transmission of distress calls

Where no DSC distress acknowledgement is received, the equipment shall automatically re-transmit the distress call attempt on channel 70 after a random delay of between 3 ½ and 4 ½ min from the beginning of the previous call.

After the transmission of each distress call attempt the equipment shall automatically re-tune to channel 16 and select the maximum transmitter power.

This sequence shall be continued until a DSC distress acknowledgement has been received, or until the automatic transmission of the distress call is discontinued manually. This manual operation shall not interrupt the transmission of any distress call attempt in progress.

Means shall be provided for transmitting the distress call attempt again by manual intervention at any time.

A visual indication shall be provided that a distress alert is in automatic retransmit mode. An audible indication shall be provided during retransmission.

5.4 Ships identity - MMSI and Group MMSI

The equipment shall be capable of storing permanently a ship's 9 digit Maritime Mobile Service Identity (MMSI) number which shall be inserted automatically in the call. The 10th digit shall be added automatically set to zero. It shall not be possible to change the identity number using any combination of operator controls. The ship's MMSI shall be readily accessible to the operator, either displayed at equipment power-up, or by a simple action of the operator. It shall not be possible to transmit any DSC call until the ship's MMSI has been stored.

Facilities shall be provided to permit the operator to program and store a Group MMSI number to enable the equipment to recognize calls addressed to both the ship's MMSI and the Group MMSI. These facilities shall limit the number of operator programmable digits to 8 and the leading zero shall be automatically inserted by the equipment.

5.5 Entry of position information

Means shall be provided for manual entry of the geographical position information and of the time when this position information was valid. In addition, facilities for automatic entry and encoding of the geographical position and time information shall be provided. Such facilities shall conform with EN 61162-1 [4]. As a minimum, the sentences GLL, GGA, RMC and GNS shall be recognized.

No connection of, or failure within, any external circuits shall disable the DSC equipment. When no position information has been entered either manually or due to the failure of any automatic system or the absence of a valid external data stream (EN 61162-1 [4]), the operator shall be aurally or visually prompted for a manual input of position. This prompt shall be repeated every 4 h.

If the position information has not been updated for 23,5 h the position shall default to the repeated digit "9" as specified in ITU-R Recommendation M.493-11 [5].

5.6 Alarm circuits

5.6.1 Distress and urgency

The equipment shall be provided with a specific acoustic alarm and a visual indication, activated automatically when a call with format specifier distress or category distress or urgency has been received. If the acoustic alarm is intermittent, it shall be repeated at least every 5 s. It shall not be possible to disable these alarm circuits.

The alarm for distress and urgency calls shall be distinguishable from the tone for safety and routine calls.

The alarm should not be activated where duplicate distress relay calls are received within 1 hour. A duplicate distress relay call is one having format specifier all ships or geographic area that contains identical message information to that of the initiating distress alert, and an identical distress MMSI.

5.6.2 Other categories

The equipment shall be provided with an acoustic alarm and a visual indication, activated automatically on receipt of calls of categories other than distress and urgency. It shall not be possible to disable the acoustic alarm circuit.

5.6.3 Acoustic alarms

The acoustic alarm shall initially be of a power that is clearly distinguishable, but not interfere with, radiotelephone communications. If not manually cancelled within 10 s, the power shall rise to a level of at least 80 dB(A) at a distance of 1 m from the equipment.

5.6.4 Cancellation of alarms

A means of manual cancellation of alarms shall be provided. In the event that an alarm is not cancelled manually, then automatic cancellation shall take place after 2 min.

5.7 Multiple watch facilities

5.7.1 General

The VHF radiotelephone equipment may be provided with multiple watch facilities on traffic channels but operation using DSC shall always take precedence. It shall not be possible to adopt scanning techniques on channel 70.

5.7.2 Scanning provisions

Equipment having multiple watch facilities shall comply with the following:

- the equipment shall include a provision for the automatic scanning of a priority channel and one additional channel. Facilities for the automatic sequential change of the additional channel may be provided;
- the priority channel is that channel which will be sampled even if there is a signal on the additional channel and on which the receiver will lock during the time a signal is detected;
- the additional channel is that channel which will be monitored during the periods the equipment is not sampling or receiving signals on the priority channel;
- provision shall be included to switch the scanning facility on and off by means of a manually operated control. In addition it shall be ensured that the receiver remains on the same channel as the transmitter for the entire duration of any communication, e.g. the scanning facility may be switched off automatically when the handset is off its hook;
- selection of the additional channel and selection, if provided, of the priority channel shall be possible at the operating position of the receiver or transceiver. If selection of the priority channel is not provided, the priority channel shall be channel 16;
- when the scanning facility is in operation, the channel number of both channels on which the equipment is operating shall be indicated;
- in a transceiver, transmission shall not be possible when the scanning facility is operating. When the scanning facility is switched off, both transmitter and receiver shall be tuned automatically to the selected additional channel;
- a transceiver shall be provided with a single manual control (e.g. push-button) in order to switch the equipment quickly for operation on the priority channel;
- at the operating position of a transceiver the selected additional channel shall be clearly indicated as being the operational channel of the equipment.

5.7.3 Scanning characteristics

When the scanning facility is switched on, the priority channel shall be sampled with a sampling period of not more than 2 s.

If a signal is detected on the priority channel the receiver shall remain on this channel for the duration of that signal.

If a signal is detected on the additional channel the sampling of the priority channel shall continue, thus interrupting the reception on the channel for periods as short as possible and not greater than 150 ms.

The design of the receiver shall provide for its proper functioning during the period the priority channel is sampled since the receiving conditions on the priority channel may differ from those on the additional channel.

In the absence of a signal on the priority channel, and, during reception of a signal on the additional channel, the duration of each listening period on this channel shall be at least 850 ms.

Means shall be provided to indicate the channel on which a signal is being received.

6 General conditions of measurement

6.1 Arrangements for test signals applied to the receiver input

Test signal sources shall be connected to the receiver input in such a way that the impedance presented to the receiver input is 50 Ω , irrespective of whether one or more test signals are applied to the receiver simultaneously.

The levels of the test signals shall be expressed in terms of the electromotive force (e.m.f.) at the terminals to be connected to the receiver.

The nominal frequency of the receiver is the carrier frequency of the selected channel.

6.2 Squelch

Unless otherwise specified, the receiver squelch facility shall be made inoperative for the duration of the conformance tests.

6.3 Transmission time limitation

Unless otherwise specified, the transmitter push-to-talk timer shall be deactivated for test purposes.

6.4 Normal test modulation

For normal test modulation, the modulation frequency shall be:

- 25 kHz channels: 1 kHz and the frequency deviation shall be ± 3 kHz.
- 12,5 kHz channels: 1 kHz and the frequency deviation shall be $\pm 1,5$ kHz.

For DSC conformance testing and maintenance purposes, the equipment shall have facilities not accessible to the operator to generate a continuous B or Y signal and dot pattern.

Additionally for conformance testing, the VHF equipment shall have facilities not accessible to the operator for generating an unmodulated carrier.

6.5 Artificial antenna

When tests are carried out with an artificial antenna, this shall be a non-reactive, non-radiating 50 Ω load.

6.6 Arrangements for test signals applied to the transmitter input

For the purposes of the present document, the audio frequency modulating signal applied to the transmitter shall be produced by a signal generator applied to the connection terminals replacing the microphone transducer.

6.7 Test channels

Conformance tests for 25 kHz channel operation shall be made on channel 16.

Conformance tests for 12,5 kHz channel operation shall be made on channel 276.

Conformance tests for DSC operation shall be made on channel 70.

6.8 Generation and examination of the digital selective call signal

During the conformance tests the DSC signals generated by the equipment shall be examined by means of calibrated apparatus for decoding and printing out the information content of the signals.

The decoding part of the equipment may be provided with a printer or an output terminal for connecting an external printer.

The equipment delivered for the purposes of testing shall be provided with a printer or an output terminal for connecting a printer or computer for registration of the decoded call sequences. Details concerning such output signals to an external printer or computer shall be agreed between the manufacturer and the testing laboratory.

The facilities of the equipment for reception and/or decoding of DSC shall be examined by feeding DSC signals from a calibrated DSC generator.

6.9 Standard test signals for DSC

The standard test signal for a VHF DSC decoder shall be a phase-modulated signal at VHF channel 70 with modulation index = 2. The modulating signal shall have a nominal frequency of 1 700 Hz and a frequency shift of ± 400 Hz with a modulation rate of 1 200 baud.

Standard test signals shall consist of a series of identical call sequences, each of which contain a known number of information symbols (format specifier, address, category, identification etc. of ITU-R Recommendation M.493-11 [5]).

Standard test signals shall be of sufficient length for the measurements to be performed or it shall be possible to repeat them without interruption to make the measurements.

6.10 Determination of the symbol error ratio in the output of the receiving part

The information content of the decoded call sequence displayed at the readout device of the receiving part shall be divided into blocks, each of which corresponds to one information symbol in the applied test signal (see clause 6.9). The total number of incorrect information symbols relative to the total number of information symbols shall be registered. In the present document, bit error ratio measurements are taken to be equivalent to symbol error ratio measurements.

6.11 Measurement uncertainty and interpretation of the measured results

6.11.1 Measurement uncertainty

Table 1: Maximum values of absolute measurement uncertainties

Parameter	Maximum uncertainty
Radio Frequency (RF)	$\pm 1 \times 10^{-7}$
RF power/level	$\pm 0,75$ dB
Maximum frequency deviation:	
- within 300 Hz to 6 kHz of modulation frequency	± 5 %
- within 6 kHz to 25 kHz of modulation frequency	± 3 dB
Deviation limitation	± 5 %
Adjacent channel power	± 5 dB
Conducted spurious emission of transmitter	± 4 dB
Audio output power	$\pm 0,5$ dB
Amplitude characteristics of receiver limiter	$\pm 1,5$ dB
Sensitivity at 20 dB SINAD	± 3 dB
Conducted emission of receiver	± 3 dB
Two-signal measurement	± 4 dB
Three-signal measurement	± 3 dB
Transmitter transient time	± 20 %
Transmitter transient frequency	± 250 Hz

6.11.2 Interpretation of the measurement results

The interpretation of the results recorded in a test report for the measurements described in the present document shall be as follows:

- the measured value related to the corresponding limit will be used to decide whether an equipment meets the requirements of the present document;
- the value of the measurement uncertainty for the measurement of each parameter shall be included in the test report;
- the recorded value of the measurement uncertainty shall be, for each measurement, equal to or lower than the figures in table 1.

For the test methods, according to the present document, the measurement uncertainty figures shall be calculated in accordance with TR 100 028 [6] and shall correspond to an expansion factor (coverage factor) $k = 1,96$ or $k = 2$ (which provide confidence levels of respectively 95 % and 95,45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)).

Table 1 is based on such expansion factors.

6.12 Test conditions, power sources, and ambient temperatures

6.12.1 Normal and extreme test conditions

Conformance tests shall be made under normal test conditions and also, where stated, under extreme test conditions (see clauses 6.14.1 and 6.14.2 applied simultaneously).

6.12.2 Test power source

During conformance testing, the equipment shall be supplied from a test power source capable of producing normal and extreme test voltages as specified in clauses 6.13.2 and 6.14.2.

The internal impedance of the test power source shall be low enough for its effect on the test results to be negligible. For the purpose of testing, the power source voltage shall be measured at the input terminals of the equipment.

During testing, the power source voltages shall be maintained within a tolerance of ± 3 % relative to the voltage level at the beginning of each test.

6.13 Normal test conditions

6.13.1 Normal temperature and humidity

The normal temperature and humidity conditions for tests shall be a combination of temperature and humidity within the following ranges:

- temperature: $+15^{\circ}\text{C}$ to $+35^{\circ}\text{C}$;
- relative humidity: 20 % to 75 %.

Where the relative humidity is less than 20 %, it shall be stated in the test report.

6.13.2 Normal power sources

6.13.2.1 Battery power source

Where the equipment is designed to operate from a battery, the normal test voltage shall be the nominal voltage of the battery (12 V, 24 V, etc.).

6.13.2.2 Other power sources

For operation from other power sources the normal test voltage shall be that declared by the manufacturer.

6.14 Extreme test conditions

Unless otherwise stated the extreme test conditions means that the EUT shall be tested at the upper temperature and at the upper limit of the supply voltage applied simultaneously, and at the lower temperature and the lower limit of the supply voltage applied simultaneously.

6.14.1 Extreme temperatures

For tests at extreme temperatures, measurements shall be made in accordance with clause 6.15, at a lower temperature of -15°C and an upper temperature of $+55^{\circ}\text{C}$.

6.14.2 Extreme values of test power sources

6.14.2.1 Battery power source

Where the equipment is designed to operate from a battery, the extreme test voltages shall be 1,3 and 0,9 times the nominal voltage of the battery (12 V, 24 V etc.).

6.14.2.2 Other power sources

For operation from other sources the extreme test voltages shall be those declared by the manufacturer.

6.15 Procedure for tests at extreme temperatures

The equipment shall be switched off during the temperature stabilizing periods.

Before conducting tests at the upper temperature, the equipment shall be placed in the test chamber and left until thermal equilibrium is reached. The equipment shall then be switched on in the high power transmit condition for at least 30 min. The equipment shall meet the requirements of the present document after this period.

For tests at the lower temperature, the equipment shall be left in the test chamber until thermal equilibrium is reached and shall then be switched to the standby or receive position for one minute, after which the equipment shall meet the requirements of the present document.

7 Environmental tests

7.1 Introduction

Environmental tests shall be carried out before tests are performed on the same equipment with respect to the other requirements of the present document.

7.2 Procedure

Unless otherwise stated, the EUT shall be connected to an electrical power source during the periods for which it is specified that electrical tests shall be carried out. These tests shall be performed using the normal test voltage (see clause 6.13.2).

7.3 Performance check

Where the term "performance check" is used, this shall be taken to mean a visual inspection of the equipment, a test of the transmitter output power and frequency error, and the receiver sensitivity to show that the equipment is functioning and that there is no visible damage or deterioration.

- a) For the transmitter:
 - The transmitter shall be connected to the artificial antenna (see clause 6.5) and tuned to channel 16. The measurements shall be made in the absence of modulation with the power switch set at maximum. The output power shall be between 6 W and 25 W, and the frequency error shall be less than $\pm 1,5$ kHz.
- b) For the Radiotelephone receiver:
 - A test signal at a carrier frequency equal to the nominal frequency of the receiver, modulated by the normal test modulation (see clause 6.4) shall be applied to the receiver input with a level of +12 dB μ V. The SINAD ratio at the receiver output shall be equal to or greater than 20 dB.
- c) For the DSC receiver:
 - A standard DSC test signal (see clause 6.9) shall be applied to the receiver input. The symbol error ratio in the decoder output shall be determined as described in clause 6.10 and the input level shall be reduced until the symbol error ratio is 10^{-2} . The level of the input signal (maximum usable sensitivity) shall be less than +6 dB μ V.

7.4 Vibration test

7.4.1 Definition

This test determines the ability of equipment to withstand vibration without resulting in mechanical weakness or degradation in performance.

7.4.2 Method of measurement

The EUT, complete with any shock and vibration absorbers with which it is provided, shall be clamped to the vibration table by its normal means of support and in its normal attitude. Provision may be made to reduce or nullify any adverse effect on equipment performance which could be caused by the presence of an electromagnetic field due to the vibration unit.

The equipment shall be subjected to sinusoidal vertical vibration at all frequencies between:

- 5 Hz and 13,2 Hz with an excursion of ± 1 mm ± 10 % (7 m/s² maximum acceleration at 13,2 Hz);
- 13,2 Hz and 100 Hz with a constant maximum acceleration of 7 m/s².

The frequency sweep rate shall be slow enough to allow the detection of resonances in any part of the equipment.

A resonance search shall be carried out throughout the test. If any resonance of the equipment had $Q \geq 5$ measured relative to the base of the vibration table, the equipment shall be subjected to a further vibration endurance test at each resonant frequency at the vibration level specified in the test with a duration of 2 h. If resonances occur only with $Q < 5$, the further endurance test shall be carried out at one single observed resonant frequency. If no resonance occurs, the endurance test shall be carried out at a frequency of 30 Hz.

The performance check shall be carried out at the end of each 2 hour endurance test period.

The procedure shall be repeated with vibration in each of two mutually perpendicular directions in the horizontal plane.

After conducting the vibration tests, the equipment shall be inspected for any mechanical deterioration.

7.4.3 Requirement

The equipment shall meet the requirements of the performance check. There shall be no harmful deterioration of the equipment visible.

7.5 Temperature tests

7.5.1 Definition

The immunity against the effects of temperature is the ability of the equipment to maintain the specified mechanical and electrical performance after the following tests have been carried out. The maximum rate of raising or reducing the temperature of the chamber in which the equipment is being tested shall be 1°C/min.

7.5.2 Dry heat

7.5.2.1 Definition

This test determines the ability of equipment to be operated at high ambient temperatures and operate through temperature changes.

7.5.2.2 Method of measurement

The EUT shall be placed in a chamber at normal room temperature and relative humidity. The EUT and, if appropriate, any climatic control devices with which it is provided shall then be switched on. The temperature shall then be raised to and maintained at +55°C ($\pm 3^\circ\text{C}$). At the end of the period of 10 h to 16 h at +55°C ($\pm 3^\circ\text{C}$), the EUT shall be subjected to a performance check. The temperature of the chamber shall be maintained at +55°C ($\pm 3^\circ\text{C}$) during the whole of the performance check period. At the end of the test, the EUT shall be returned to normal environmental conditions or to those at the start of the next test.

7.5.2.3 Requirement

The equipment shall meet the requirements of the performance check.

7.5.3 Damp heat

7.5.3.1 Definition

This test determines the ability of equipment to be operated under conditions of high humidity.

7.5.3.2 Method of measurement

The EUT shall be placed in a chamber at normal room temperature and relative humidity. The temperature shall then be raised to +40°C ($\pm 2^\circ\text{C}$), and the relative humidity raised to 93 % (± 3 %) over a period of 3 h $\pm 0,5$ h. These conditions shall be maintained for a period of 10 h to 16 h. Any climatic control devices provided in the EUT may be switched on at the conclusion of this period.

The EUT shall be switched on 30 min later, or after such period as agreed with the manufacturer, and shall be kept operational for at least 2 h during which period the EUT shall be subjected to the performance check. The temperature and relative humidity of the chamber shall be maintained as specified during the whole test period.

At the end of the test period and with the EUT still in the chamber, the chamber shall be brought to room temperature in not less than 1 h. At the end of the test the EUT shall be returned to normal environmental conditions or to those required at the start of the next test.

7.5.3.3 Requirement

The equipment shall meet the requirements of the performance check.

7.5.4 Low temperature

7.5.4.1 Definition

This test determines the ability of equipment to be operated at low temperatures. It also allows equipment to demonstrate an ability to start up at low ambient temperatures.

7.5.4.2 Method of measurement

The EUT shall be placed in a chamber at normal room temperature and relative humidity. The temperature shall then be reduced to, and be maintained at, -15°C ($\pm 3^{\circ}\text{C}$) for a period of 10 h to 16 h. Any climatic control devices provided in the EUT may be switched on at the conclusion of this period. The EUT shall be switched on 30 min later, or after such period as agreed by the manufacturer, and shall be kept operational for at least 2 h during which period the EUT shall be subjected to a performance check. The temperature of the chamber shall be maintained at -15°C ($\pm 3^{\circ}\text{C}$) during the whole of the test period. At the end of the test the EUT shall be returned to normal environmental conditions or to those required at the start of the next test.

7.5.4.3 Requirement

The equipment shall meet the requirements of the performance check.

8 Transmitter

All tests on the transmitter shall be carried out with the output power switch set at its maximum except where otherwise stated.

8.1 Frequency error

8.1.1 Definition

The frequency error is the difference between the measured carrier frequency and its nominal value.

8.1.2 Method of measurement

The carrier frequency shall be measured in the absence of modulation, with the transmitter connected to an artificial antenna (see clause 6.5) and tuned to channel 16.

Measurements shall be made under normal test conditions (see clause 6.13) and under extreme test conditions (see clauses 6.14.1 and 6.14.2 applied simultaneously).

This test shall be carried out with the output power switch being set at both maximum and minimum.

8.1.3 Limits

The frequency error shall be within $\pm 1,5$ kHz.

8.2 Carrier power

8.2.1 Definition

The carrier power is the mean power delivered to the artificial antenna during one radio frequency cycle in the absence of modulation.

The rated output power is the carrier power declared by the manufacturer.

8.2.2 Method of measurement

The transmitter shall be connected to an artificial antenna (see clause 6.5) and the power delivered to this artificial antenna shall be measured. The measurements shall be made on channel 16, the highest frequency channel and the lowest frequency channel under normal test conditions (see clause 6.13) and channel 16 under extreme test conditions (see clauses 6.14.1 and 6.14.2 applied simultaneously).

During the test on channel 16, a check should be made that the power output falls to zero after the maximum continuous transmission time has elapsed (see clause 4.4).

8.2.3 Limits

8.2.3.1 Normal test conditions

With the output power switch set at maximum, the carrier power shall remain between 6 W and 25 W and be within $\pm 1,5$ dB of the rated output power under normal test conditions. The output power shall never however exceed 25 W.

With the output power switch set at minimum the carrier power shall remain between 0,1 W and 1 W.

The maximum continuous transmission time shall be between 5 min and 6 min.

8.2.3.2 Extreme test conditions

With the output power switch set at maximum, the carrier power shall remain between 6 W and 25 W and be within +2 dB, -3 dB of the rated output power under extreme conditions. The output power shall never however exceed 25 W.

With the output power switch set at minimum the carrier power shall remain between 0,1 W and 1 W.

The maximum continuous transmission time shall be between 5 min and 6 min.

8.3 Frequency deviation

8.3.1 Definition

For the purposes of the present document, the frequency deviation is the difference between the instantaneous frequency of the modulated radio frequency signal and the carrier frequency.

8.3.2 Maximum permissible frequency deviation

8.3.2.1 Method of measurement

The frequency deviation shall be measured at the output with the transmitter connected to an artificial antenna (see clause 6.5) and tuned to channel 16, by means of a deviation meter capable of measuring the maximum deviation, including that due to any harmonics and intermodulation products which may be generated in the transmitter.

The modulation frequency shall be varied between 100 Hz and 3 kHz. The level of this test signal shall be 20 dB above the level which produces normal test modulation (see clause 6.4). This test shall be carried out with the output power switch set at both maximum and minimum.

8.3.2.2 Limits

The maximum permissible frequency deviation shall be:

- 25 kHz channels: ± 5 kHz.
- 12,5 kHz channels: $\pm 2,5$ kHz.

8.3.3 Reduction of frequency deviation at modulation frequencies above 3 kHz

8.3.3.1 Method of measurement


The transmitter shall operate under normal test conditions (see clause 6.13) connected to a load as specified in clause 6.5. The transmitter shall be modulated by the normal test modulation (see clause 6.4). With the input level of the modulation signal being kept constant, the modulation frequency shall be varied between 3 kHz (see note) and a frequency equal to the channel separation for which the equipment is intended and the frequency deviation shall be measured.

NOTE: 2,55 kHz for transmitters intended for 12,5 kHz channel separation.

8.3.3.2 Limits

The frequency deviation at modulation frequencies between 3,0 kHz (for equipment operating with 25 kHz channel separations) or 2,55 kHz (for equipment operating with 12,5 kHz channel separation) and 6,0 kHz shall not exceed the frequency deviation at a modulation frequency of 3,0 kHz/2,55 kHz. At 6,0 kHz the deviation shall be not more than 30,0 % of the maximum permissible frequency deviation.

The frequency deviation at modulation frequencies between 6,0 kHz and a frequency equal to the channel separation for which the equipment is intended shall not exceed that given by a linear representation of the frequency deviation (dB) relative to the modulation frequency, starting at the 6,0 kHz limit and having a slope of -14,0 dB per octave. These limits are illustrated in figure 1.

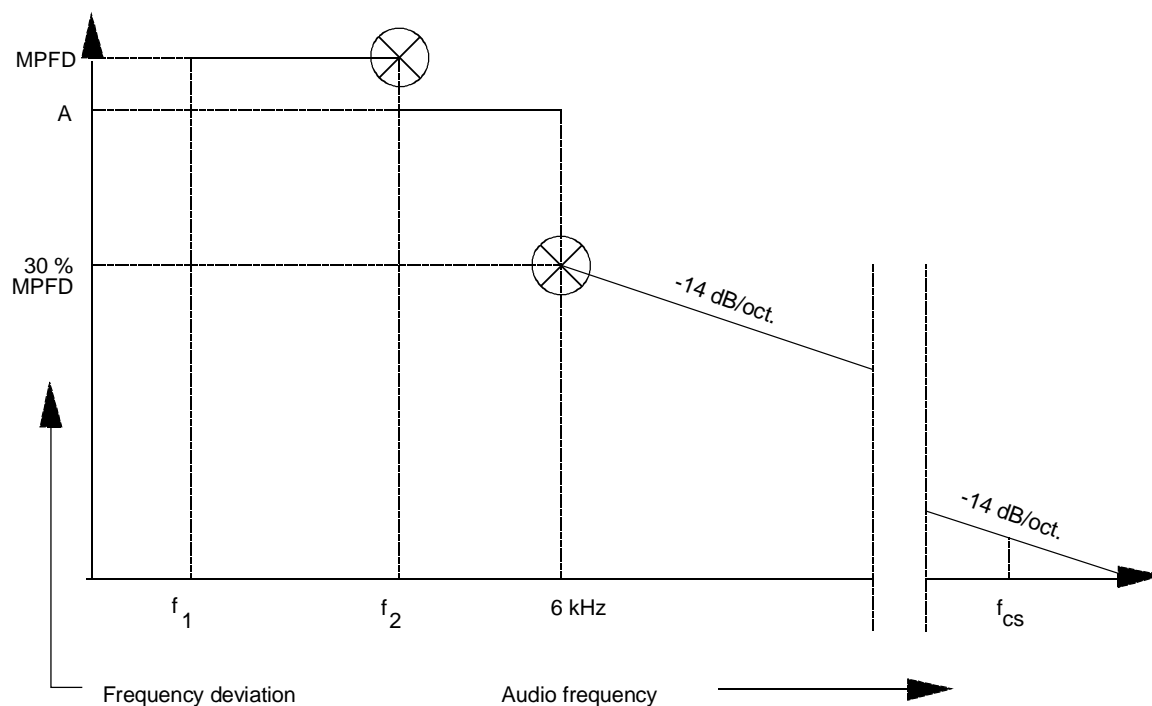

NOTE:

Abbreviations:

f_1 lowest appropriate frequency

f_2 3,0 kHz (for 25 kHz channel separation), or
2,55 kHz (for 12,5 kHz channel separation)

MPFD maximum permissible frequency deviation, clause 8.3.2.1

A measured frequency deviation at f_2

f_{cs} frequency equal to channel separation

Figure 1: Frequency deviation

8.4 Sensitivity of the modulator, including microphone

8.4.1 Definition

This characteristic expresses the capability of the transmitter to produce sufficient modulation when an audio frequency signal corresponding to the normal mean speech level is applied to the microphone.

8.4.2 Method of measurement

An acoustic signal with a frequency of 1 kHz and sound level of 94 dB(A) shall be applied to the microphone. The resulting deviation shall be measured.

8.4.3 Limits

The resulting frequency deviation shall be between $\pm 1,5$ kHz and ± 3 kHz.

8.5 Audio frequency response

8.5.1 Definition

The audio frequency response is the frequency deviation of the transmitter as a function of the modulating frequency.

8.5.2 Method of measurement

A modulating signal at a frequency of 1 kHz shall be applied to the transmitter and the deviation shall be measured at the output. The audio input level shall be adjusted so that the frequency deviation is ± 1 kHz. This is the reference point in figure 2 (1 kHz corresponds to 0 dB).

The modulation frequency shall then be varied between 300 Hz and 3 kHz (see note), with the level of the audio frequency signal being kept constant and equal to the value specified above.

NOTE: 2,55 kHz for transmitters intended for 12,5 kHz channel separation.

8.5.3 Limit

The audio frequency response shall be within +1 dB and -3 dB of a 6 dB/octave line passing through the reference point (see figure 2). The upper limit frequency shall be 2,55 kHz for 12,5 kHz channels.

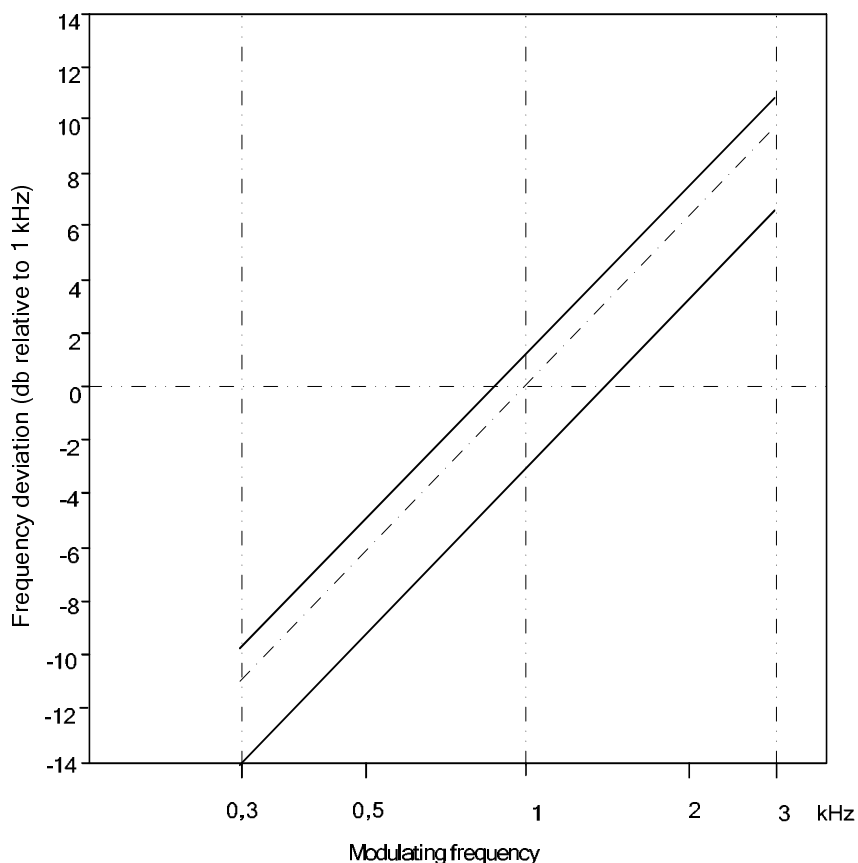


Figure 2: Audio frequency response

8.6 Audio frequency harmonic distortion of the emission

8.6.1 Definition

The harmonic distortion of the emission modulated by any audio frequency signal is defined as the ratio, expressed as a percentage, of the root mean square (r.m.s) voltage of all the harmonic components of the fundamental frequency to the total r.m.s. voltage of the signal after linear demodulation.

8.6.2 Method of measurement

The RF signal produced by the transmitter shall be applied via an appropriate coupling device to a linear demodulator with a de-emphasis network of 6 dB per octave. This test shall be carried out on a 25 kHz channel with the output power switch at both maximum and minimum.

8.6.2.1 Normal test conditions

Under normal test conditions (see clause 6.13) the RF signal shall be modulated successively at frequencies of 300 Hz, 500 Hz and 1 kHz with a constant modulation index of 3.

The distortion of the audio frequency signal shall be measured at all the frequencies specified above.

8.6.2.2 Extreme test conditions

Under extreme test conditions (see clauses 6.14.1 and 6.14.2 applied simultaneously), the measurements shall be carried out at 1 kHz with a frequency deviation of ± 3 kHz.

8.6.3 Limits

The harmonic distortion shall not exceed 10 %.

8.7 Adjacent channel power

8.7.1 Definition

The adjacent channel power is that part of the total power output of a transmitter under defined conditions of modulation which falls within a specified passband centred on the nominal frequency of either of the adjacent channels. This power is the sum of the mean power produced by the modulation hum and noise of the transmitter.

8.7.2 Method of measurement

The adjacent channel power can be measured with a power measuring receiver which conforms to annex B (referred to in clause 8.7.2 and annex B as the "receiver") ITU-R Recommendation SM 332-4 [7]:

- a) The transmitter shall be operated at the carrier power determined in clause 8.2 under normal test conditions. The output of the transmitter shall be linked to the input of the "receiver" by a connecting device such that the impedance presented to the transmitter is 50 Ω and the level at the "receiver" input is appropriate.
- b) With the transmitter unmodulated, the tuning of the "receiver" shall be adjusted so that a maximum response is obtained. This is the 0 dB response point. The "receiver" attenuator setting and the reading of the meter shall be recorded.

The measurement may be made with the transmitter modulated with normal test modulation, in which case this fact shall be recorded with the test results.

- c) The tuning of the "receiver" shall be adjusted away from the carrier so that the "receiver" -6 dB response nearest to the transmitter carrier frequency is located at a displacement from the nominal carrier frequency of 17 kHz for 25 kHz channels or 8,25 kHz for 12,5 kHz channels.
- d) The transmitter shall be modulated with 1,25 kHz at a level which is 20 dB higher than that required to produce ± 3 kHz deviation for 25 kHz channels or $\pm 1,5$ kHz deviation for 12,5 kHz channels.
- e) The "receiver" variable attenuator shall be adjusted to obtain the same meter reading as in step b) or a known relation to it.
- f) The ratio of adjacent channel power to carrier power is the difference between the attenuator settings in steps b) and e), corrected for any differences in the reading of the meter.
- g) The measurement shall be repeated with the "receiver" tuned to the other side of the carrier.

The measurement may be made with the transmitter modulated with normal test modulation, in which case this fact shall be recorded with the test results.

8.7.3 Limits

The adjacent channel power shall not exceed a value of:

- 25 kHz channel: 70 dB below the carrier power of the transmitter without any need to be below 0,2 μ W.
- 12,5 kHz channel: 60 dB below the carrier power of the transmitter without any need to be below 0,2 μ W.

8.8 Conducted spurious emissions conveyed to the antenna

8.8.1 Definition

Conducted spurious emissions are emissions on a frequency or frequencies which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out of band emissions.

8.8.2 Method of measurement

Conducted spurious emissions shall be measured with the unmodulated transmitter connected to the artificial antenna (see clause 6.5).

The measurements shall be made over a range from 9 kHz to 2 GHz, excluding the channel on which the transmitter is operating and its adjacent channels.

The measurements for each spurious emission shall be made using a tuned radio measuring instrument or a spectrum analyser.

8.8.3 Limit

The power of any conducted spurious emission on any discrete frequency shall not exceed 0,25 μ W.

8.9 Cabinet radiation and conducted spurious emissions other than those conveyed to the antenna

8.9.1 Definitions

Cabinet radiation consists of emissions at frequency, radiated by the equipment cabinet and structures.

Conducted spurious emissions other than those conveyed to the antenna are emissions at frequencies, other than those of the carrier and the sideband components resulting from the wanted modulation process, which are produced by conduction in the wiring and accessories used with the equipment.

8.9.2 Method of measurement

On a test site, selected from annex C, the equipment shall be placed at the specified height on a non-conducting support and in position closest to normal use as declared by the manufacturer.

The transmitter antenna connector shall be connected to on artificial antenna, clause 6.5.

The test antenna shall be orientated for vertical polarization and the length of the test antenna shall be chosen to correspond to the instantaneous frequency of the measuring receiver.

The output of the test antenna shall be connected to a measuring receiver.

The transmitter shall be switched on without modulation, and measuring receiver shall be tuned over the frequency range 30 MHz to 2 GHz, except for the channel on which the transmitter is intended to operate and its adjacent channels.

At each frequency at which a spurious component is detected:

- a) the test antenna shall be raised and lowered through the specified range of heights until a maximum signal level is detected on the measuring receiver;
- b) the transmitter shall be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver;

- c) the maximum signal level detected by the measuring receiver shall be noted;
- d) the transmitter shall be replaced by a substitution antenna as defined in annex C;
- e) the substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the spurious component detected;
- f) the substitution antenna shall be connected to a calibrated signal generator;
- g) the frequency of the calibrated signal generator shall be set to the frequency of the spurious component detected;
- h) the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver, if necessary;
- i) the test antenna shall be raised and lowered through the specified range of heights to ensure that the maximum signal is received;
- j) the input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver that is equal to the level noted while the spurious component was measured, corrected for the change of input attenuator setting of the measuring receiver;
- k) the input level to the substitution antenna shall be recorded as power level, corrected for the change of input attenuator setting of the measuring receiver;
- l) the measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization;
- m) the measure of the effective radiated power of the spurious components is larger of the two power levels recorded for spurious component at the input to the substitution antenna, corrected for the gain of the antenna if necessary;
- n) the measurements shall be repeated with the transmitter on stand-by.

8.9.3 Limits

When the transmitter is in stand-by the cabinet radiation and spurious emissions shall not exceed 2 nW.

When the transmitter is in operation the cabinet radiation and spurious emissions shall not exceed 0,25 μ W.

8.10 Transient frequency behaviour of the transmitter

8.10.1 Definitions


The transient frequency behaviour of the transmitter is the variation in time of the transmitter frequency difference from the nominal frequency of the transmitter when the RF output power is switched on and off.

- t_{on} : according to the method of measurement described in clause 8.9.2 the switch-on instant t_{on} of a transmitter is defined by the condition when the output power, measured at the antenna terminal, exceeds 0,1 % of the nominal power;
- t_1 : period of time starting at t_{on} and finishing according to table 2;
- t_2 : period of time starting at the end of t_1 and finishing according to table 2;
- t_{off} : switch-off instant defined by the condition when the nominal power falls below 0,1 % of the nominal power;
- t_3 : period of time that finishing at t_{off} and starting according to table 2.

Table 2: Time periods

t_1 (ms)	5,0
t_2 (ms)	20,0
t_3 (ms)	5,0

8.10.2 Method of measurement

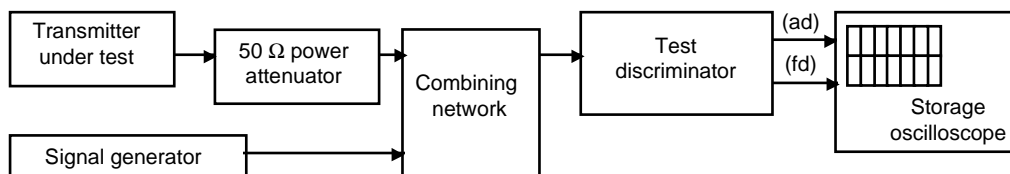**Figure 3: Measurement arrangement**

Two signals shall be connected to the test discriminator via a combining network (see clause 6.1).

The transmitter shall be connected to a 50 Ω power attenuator.

A test signal generator shall be connected to the second input of the combining network.

The test signal shall be adjusted to the nominal frequency of the transmitter.

The test signal shall be modulated by a frequency of 1 kHz with a deviation of ± 25 kHz.

The test signal level shall be adjusted to correspond to 0,1 % of the power of the transmitter under test measured at the input of the test discriminator. This level shall be maintained throughout the measurement.

The amplitude difference (ad) and the frequency difference (fd) output of the test discriminator shall be connected to a storage oscilloscope.

The storage oscilloscope shall be set to display the channel corresponding to the (fd) input up to ± 25 kHz.

The storage oscilloscope shall be set to a sweep rate of 10 ms/division and set so that the triggering occurs at one division from the left edge of the display.

The display shall show the 1 kHz test signal continuously.

The storage oscilloscope shall then be set to trigger on the channel corresponding to the amplitude difference (ad) input at a low input level, rising.

The transmitter shall then be switched on, without modulation, to produce the trigger pulse and a picture on the display.

The result of the change in the ratio of power between the test signal and the transmitter output will, due to the capture ratio of the test discriminator, produce two separate sides on the picture, one showing the 1 kHz test signal, the other the frequency difference of the transmitter versus time.

The moment when the 1 kHz test signal is completely suppressed is considered to provide t_{on} .

The periods of time t_1 and t_2 as defined in table 2 shall be used to define the appropriate template.

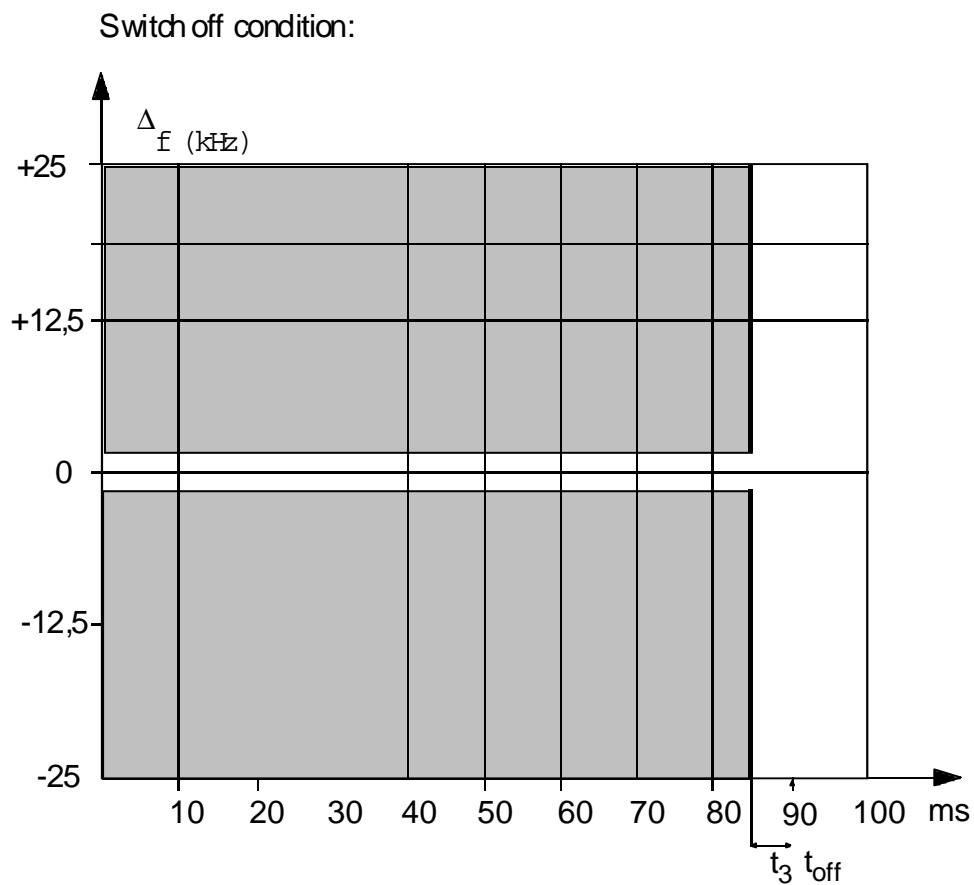
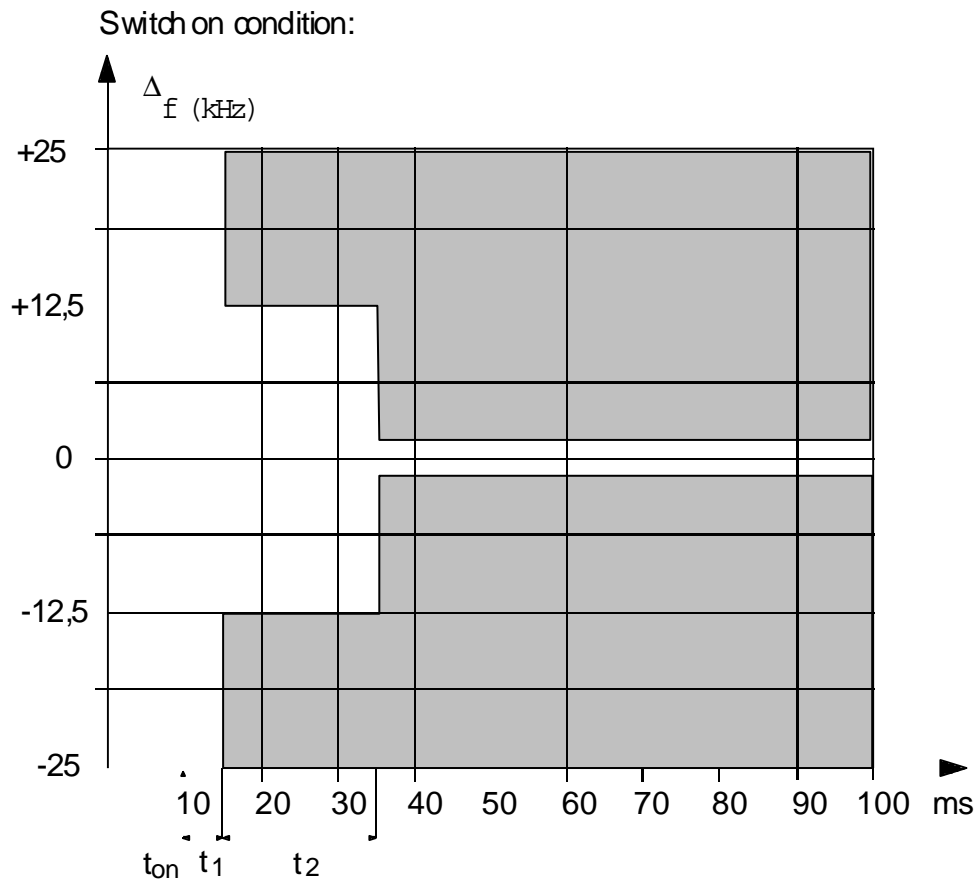


Figure 4: Storage oscilloscope view t_1 , t_2 and t_3

The result shall be recorded as frequency difference versus time.

The transmitter shall remain switched on.

The storage oscilloscope shall be set to trigger on the channel corresponding to the amplitude difference (ad) input at a high input level, decaying and set so that the triggering occurs at 1 division from the right edge of the display.

The transmitter shall then be switched off.

The moment when the 1 kHz test signal starts to rise is considered to provide t_{off} .

The period of time t_3 as defined in table 2 shall be used to define the appropriate template.

The result shall be recorded as frequency difference versus time.

8.10.3 Limits

During the periods of time t_1 and t_3 the frequency difference shall not exceed ± 25 kHz.

The frequency difference after the end of t_2 shall be within the limit of the frequency error given in clause 8.1.

During the period of time t_2 the frequency difference shall not exceed $\pm 12,5$ kHz.

Before the start of t_3 the frequency difference shall be within the limit of the frequency error given in clause 8.1.

8.11 Residual modulation of the transmitter

8.11.1 Definition

The residual modulation of the transmitter is the ratio, in dB, of the demodulated RF signal in the absence of wanted modulation, to the demodulated RF signal produced when the normal test modulation is applied.

8.11.2 Method of measurement

The normal test modulation defined in clause 6.4 shall be applied to the transmitter. The high frequency signal produced by the transmitter shall be applied, via an appropriate coupling device, to a linear demodulator with a de-emphasis network of 6 dB per octave. The time constant of this de-emphasis network shall be at least 750 μ s.

Precautions shall be taken to avoid the effects of emphasizing the low audio frequencies produced by internal noise.

The signal shall be measured at the demodulator output using an r.m.s. voltmeter.

The modulation shall then be switched off and the level of the residual audio frequency signal at the output shall be measured again.

8.11.3 Limit

The residual modulation shall not exceed -40 dB on either 12,5 kHz or 25 kHz channels.

8.12 Frequency error (demodulated DSC signal)

8.12.1 Definition

The frequency error for the B- and the Y-state is the difference between the measured frequency from the demodulator and the nominal values.

8.12.2 Method of measurement

The transmitter shall be connected to the artificial antenna as specified in clause 6.5 and a suitable FM demodulator. The transmitter shall be set to channel 70.

The transmitter shall be set to transmit a continuous B- or Y- state.

The measurement shall be performed by measuring the demodulated output, for both the continuous B- and Y-state.

The measurements shall be carried out under normal test conditions (see clause 6.13) and extreme test conditions (see clauses 6.14.1 and 6.14.2 applied simultaneously).

8.12.3 Limits

The measured frequency from the demodulator at any time for the B-state shall be within $2\ 100\ \text{Hz} \pm 10\ \text{Hz}$ and for the Y-state within $1\ 300\ \text{Hz} \pm 10\ \text{Hz}$.

8.13 Modulation index for DSC

8.13.1 Definition

This test measures the modulation index in the B and Y states.

8.13.2 Method of measurement

The transmitter shall be set to transmit continuous B and then Y signals. The frequency deviations shall be measured.

8.13.3 Limits

The modulation index shall be $2,0 \pm 10\ \%$.

8.14 Modulation rate for DSC

8.14.1 Definition

The modulation rate is the bit stream speed measured in bit/s.

8.14.2 Method of measurement

The transmitter shall be set to transmit continuous dot pattern.

The RF output terminal of the transmitter, suitably attenuated, shall be connected via a linear FM demodulator to a calibrated FSK demodulator. The output of the FSK demodulator shall be limited in bandwidth by a low pass filter with a cut-off frequency of 1 kHz and a slope of 12 dB/octave.

The frequency of the output shall be measured.

8.14.3 Limits

The frequency shall be $600\ \text{Hz} \pm 30\ \text{ppm}$ corresponding to a modulation rate of 1 200 baud.

8.15 Testing of generated call sequences

8.15.1 Definition

Generated call sequences are calls which comply with the requirements of ITU-R Recommendation M.493-11 [5].

8.15.2 Method of measurement

The output of the transmitter shall be suitably connected to a calibrated apparatus for decoding and printing out the information content of the call sequences generated by the equipment.

The transmitter shall be set to transmit DSC calls as specified in annex A.

8.15.3 Requirement

The requirements of ITU-R Recommendation M.493-11 [5] regarding message composition and content shall be met.

The generated calls shall be analysed with the calibrated apparatus for correct configuration of the signal format, including time diversity.

It shall be verified that, after transmission of a DSC call, the transmitter re-tunes to the original channel. However in the case of a distress call the transmitter shall tune to channel 16 and automatically select the maximum power.

The telecommands used and the channels tested for switching shall be stated in the test report.

8.16 Testing of free channel transmission on DSC channel 70

8.16.1 Definition

This test verifies that the transmitter has a facility to prevent transmission of DSC calls if channel 70 is busy, except in case of distress and safety calls.

8.16.2 Method of measurement

The output of the transmitter shall be suitably connected to a calibrated apparatus for decoding and printing out the information content of the call sequences generated by the equipment.

The receiver input is connected to a signal generator. The signal generator is set to the frequency of channel 70 (156,525 MHz) and the RF signal shall be modulated by a standard DSC signal, see clause 6.9. The test is performed at an RF level; of +6 dB μ V (e.m.f).

If the receiver input and transmitter output are combined in the same port it is necessary to combine the calibrated apparatus for decoding and printing out the information content of the call sequences and the signal generator through a suitable combining network, see clause 6.1. It may be necessary to protect the signal generator against the power output from the equipment through an attenuator.

The signal generator output shall be turned on. The transmitter shall be set to transmit DSC calls as specified in annex A.

Then the signal generator output shall be turned off.

8.16.3 Requirement

If the format specifier is distress or the category is either distress, urgency or safety in the transmitted DSC call, the call shall be transmitted while the signal generator output is still on.

Otherwise the call shall not be transmitted until the signal generator output has been turned off.

9 Radiotelephone receiver

9.1 Harmonic distortion and rated audio-frequency output power

9.1.1 Definition

The harmonic distortion at the receiver output is defined as the ratio, expressed as a percentage, of the total r.m.s. voltage of all the harmonic components of the modulation audio frequency to the total r.m.s. voltage of the signal delivered by the receiver.

The rated audio frequency output power is the value stated by the manufacturer to be the maximum power available at the output, for which all the requirements of the present document are met.

9.1.2 Methods of measurement

Test signals at levels of +60 dB μ V (e.m.f.) and +100 dB μ V (e.m.f.), at a carrier frequency equal to the nominal frequency of the receiver and modulated by the normal test modulation (see clause 6.4) shall be applied in succession to the receiver input under the conditions specified in clause 6.1.

For each measurement, the receiver's audio-frequency volume control shall be set so as to obtain, in a resistive load which simulates the receiver's operating load, the rated audio frequency output power (see clause 9.1.1). The value of this load shall be stated by the manufacturer.

Under normal test conditions (see clause 6.13) the test signal shall be modulated successively at 300 Hz, 500 Hz and 1 kHz with a constant modulation index of 3 (ratio between the frequency deviation and the modulation frequency). The harmonic distortion and audio frequency output power shall be measured at all the frequencies specified above.

9.1.3 Limits

The rated audio-frequency output power shall be at least:

- 2 W in a loudspeaker;
- 1 mW in the handset earphone.

The harmonic distortion shall not exceed 10 %.

9.2 Audio frequency response

9.2.1 Definition

The audio frequency response is defined as the variation in the receiver's audio frequency output level as a function of the modulation frequency of the radio frequency signal with constant deviation applied to its input.

9.2.2 Method of measurement

A test signal of +60 dB μ V (e.m.f.), at a carrier frequency equal to the nominal frequency of the receiver and modulated with normal test modulation (see clause 6.4) shall be applied to the receiver antenna port under the conditions specified in clause 6.1.

The receiver's audiofrequency power control shall be set so as to produce a power level equal to 50 % of the rated output power (see clause 9.1). This setting shall remain unchanged during the test.

The frequency deviation shall then be reduced to ± 1 kHz and the audio output is the reference point in figure 5 (1 kHz corresponds to 0 dB).

The frequency deviation shall remain constant while the modulation frequency is varied between 300 Hz and 3 kHz and the output level shall then be measured.

The measurement shall be repeated with a test signal at frequencies 1,5 kHz above and below the nominal frequency of the receiver.

9.2.3 Limits

The audio frequency response shall not deviate by more than +1 dB or -3 dB from a characteristic giving the output level as a function of the audio frequency, decreasing by 6 dB per octave and passing through the measured point at 1 kHz (see figure 5).

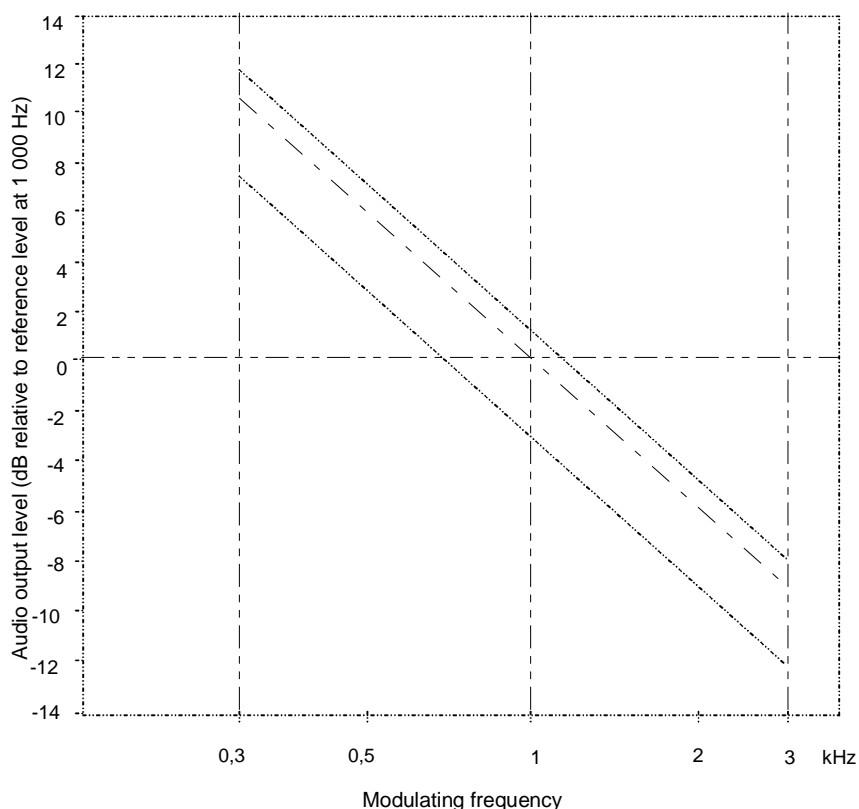


Figure 5: Audio frequency response

9.3 Maximum usable sensitivity

9.3.1 Definition

The maximum usable sensitivity of the receiver is the minimum level of the signal (e.m.f.) at the nominal frequency of the receiver which, when applied to the receiver input with normal test modulation (see clause 6.4), will produce:

- in all cases, an audio frequency output power equal to 50 % of the rated output power (see clause 9.1); and
- a Signal + Noise + Distortion to Noise + Distortion (SINAD) ratio of 20 dB, measured at the receiver output through a psophometric telephone filtering network such as described in ITU-T Recommendation O.41 [3].

9.3.2 Method of measurement

A test signal at a carrier frequency equal to the nominal frequency of the receiver, modulated by the normal test modulation (see clause 6.4) shall be applied to the receiver input. An audio frequency load and a measuring instrument for measuring SINAD ratio (through a psophometric network as specified in clause 9.3.1) shall be connected to the receiver output terminals.

The level of the test signal shall be adjusted until a SINAD ratio of 20 dB is obtained, using the psophometric network and with the receiver's audio-frequency power control adjusted to produce 50 % of the rated output power. Under these conditions, the level of the test signal at the input is the value of the maximum usable sensitivity.

The measurements shall be made under normal test conditions (see clause 6.13) and under extreme test conditions (see clauses 6.14.1 and 6.14.2 applied simultaneously).

A receiver output power variation of ± 3 dB relative to 50 % of the rated output power may be allowed for sensitivity measurements under extreme test conditions.

9.3.3 Limits

The maximum usable sensitivity for either 25 kHz or 12,5 kHz channels shall not exceed +6 dB μ V (e.m.f.) under normal test conditions and +12 dB μ V (e.m.f.) under extreme test conditions.

9.4 Co-channel rejection

9.4.1 Definition

The co-channel rejection is a measure of the capability of the receiver to receive a wanted modulated signal without exceeding a given degradation due to the presence of an unwanted modulated signal, both signals being at the nominal frequency of the receiver.

9.4.2 Method of measurement

The two input signals shall be connected to the receiver via a combining network (see clause 6.1). The wanted signal shall have normal test modulation (see clause 6.4). The unwanted signal shall be modulated by 400 Hz with a deviation of ± 3 kHz (see note). Both input signals shall be at the nominal frequency of the receiver under test and the measurement repeated for displacements of the unwanted signal of ± 3 kHz see note).

The wanted input signal shall be set to the value corresponding to the measured maximum usable sensitivity (see clause 9.3). The amplitude of the unwanted input signal shall then be adjusted until the SINAD ratio (psophometrically weighted) at the output of the receiver is reduced to 14 dB.

The co-channel rejection ratio shall be expressed as the ratio in dB of the level of the unwanted signal to the level of the wanted signal at the receiver input for which the specified reduction in SINAD ratio occurs.

NOTE: For 12,5 kHz channels the frequency deviation and the displacement of the unwanted signal shall be $\pm 1,5$ kHz.

9.4.3 Limit

The co-channel rejection ratio, at any frequency of the unwanted signal within the specified range, shall be between:

- -10 dB and 0 dB for 25 kHz channels;
- -12 dB and 0 dB for 12,5 kHz channels.

9.5 Adjacent channel selectivity

9.5.1 Definition

The adjacent channel selectivity is a measure of the capability of the receiver to receive a wanted modulated signal without exceeding a given degradation due to the presence of an unwanted modulated signal which differs in frequency from the wanted signal by the nominal channel spacing.

9.5.2 Method of measurement

The two input signals shall be applied to the receiver input via a combining network (see clause 6.1). The wanted signal shall be at the nominal frequency of the receiver and shall have normal test modulation (see clause 6.4). The unwanted signal shall be modulated by 400 Hz with a deviation of ± 3 kHz for 25 kHz channels or $\pm 1,5$ kHz for 12,5 kHz channels, and shall be at the frequency of the channel immediately above that of the wanted signal.

The wanted input signal level shall be set to the value corresponding to the maximum usable sensitivity. The amplitude of the unwanted input signal shall then be adjusted until the SINAD ratio at the receiver output, psophometrically weighted, is reduced to 14 dB. The measurement shall be repeated with an unwanted signal at the frequency of the channel below that of the wanted signal.

The adjacent channel selectivity shall be expressed as the lower value of the ratios in dB for the upper and lower adjacent channels of the level of the unwanted signal to the level of the wanted signal.

The measurements shall then be repeated under extreme test conditions (see clauses 6.14.1 and 6.14.2 applied simultaneously) with the wanted signal set to the value corresponding to the maximum usable sensitivity under these conditions.

9.5.3 Limits

25 kHz channels: the adjacent channel selectivity shall be not less than 70 dB under normal test conditions and not less than 60 dB under extreme test conditions.

12,5 kHz channels: the adjacent channel selectivity shall be not less than 60 dB under normal test conditions and not less than 50 dB under extreme test conditions.

9.6 Spurious response rejection

9.6.1 Definition

The spurious response rejection is a measure of the capability of the receiver to discriminate between the wanted modulated signal at the nominal frequency and an unwanted signal at any other frequency at which a response is obtained.

9.6.2 Method of measurement

Two input signals shall be applied to the receiver input via a combining network (see clause 6.1). The wanted signal shall be at the nominal frequency of the receiver and shall have normal test modulation (see clause 6.4).

The unwanted signal shall be modulated by 400 Hz with a deviation of ± 3 kHz.

The wanted input signal level shall be set to the value corresponding to the maximum usable sensitivity. The amplitude of the unwanted input signal shall be adjusted to an e.m.f. of +86 dB μ V. The frequency shall then be swept over the frequency range from 100 kHz to 2 000 MHz.

At any frequency at which a response is obtained, the input level shall be adjusted until the SINAD ratio psophometrically weighted, is reduced to 14 dB.

The spurious response rejection ratio shall be expressed as the ratio in dB between the unwanted signal and the wanted signal at the receiver input when the specified reduction in the SINAD ratio is obtained.

9.6.3 Limit

At any frequency separated from the nominal frequency of the receiver by more than 25 kHz, the spurious response rejection ratio shall be not less than 70 dB.

9.7 Intermodulation response

9.7.1 Definition

The intermodulation response is a measure of the capability of a receiver to receive a wanted modulated signal without exceeding a given degradation due to the presence of two or more unwanted signals with a specific frequency relationship to the wanted signal frequency.

9.7.2 Method of measurement

Three signal generators, A, B and C shall be connected to the receiver via a combining network (see clause 6.1). The wanted signal, represented by signal generator A shall be at the nominal frequency of the receiver and shall have normal test modulation (see clause 6.4). The unwanted signal from signal generator B shall be unmodulated and adjusted to the frequency 50 kHz above (or below) the nominal frequency of the receiver. The second unwanted signal from signal generator C shall be modulated by 400 Hz with a deviation of ± 3 kHz, and adjusted to a frequency 100 kHz above (or below) the nominal frequency of the receiver.

The wanted input signal shall be set to a value corresponding to the maximum usable sensitivity. The amplitude of the two unwanted signals shall be maintained equal and shall be adjusted until the SINAD ratio at the receiver output, psophometrically weighted, is reduced to 14 dB. The frequency of signal generator B shall be adjusted slightly to produce the maximum degradation of the SINAD ratio. The level of the two unwanted test signals shall be readjusted to restore the SINAD ratio of 14 dB. The intermodulation response ratio shall be expressed as the ratio in dB between the two unwanted signals and the wanted signal at the receiver input, when the specified reduction in the SINAD ratio is obtained.

9.7.3 Limit

The intermodulation response ratio shall be greater than 68 dB.

9.8 Blocking or desensitization

9.8.1 Definition

Blocking is a change (generally a reduction) in the wanted output power of the receiver or a reduction of the SINAD ratio due to an unwanted signal on another frequency.

9.8.2 Method of measurement

Two input signals shall be applied to the receiver via a combining network (see clause 6.1). The modulated wanted signal shall be at the nominal frequency of the receiver and shall have normal test modulation (see clause 6.4). Initially the unwanted signal shall be switched off and the wanted signal set to the value corresponding to the maximum usable sensitivity.

The output power of the wanted signal shall be adjusted, where possible, to 50 % of the rated output power and in the case of stepped volume controls, to the first step that provides an output power of at least 50 % of the rated output power. The unwanted signal shall be unmodulated and the frequency shall be swept between +1 MHz and +10 MHz, and also between -1 MHz and -10 MHz, relative to the nominal frequency of the receiver. For practical reasons the measurements will be carried out at frequency offsets of the unwanted signal at approximately 1MHz, 2MHz, 5MHz and 10MHz.

The input level of the unwanted signal, at all frequencies in the specified ranges, shall be so adjusted that the unwanted signal causes:

- a) a reduction of 3 dB in the output level of the wanted signal; or
- b) a reduction to 14 dB of the SINAD ratio at the receiver output using a psophometric telephone filtering network such as described in ITU-T Recommendation O.41 [3] whichever occurs first. This level shall be noted.

9.8.3 Limit

The blocking level for any frequency within the specified ranges, shall be not less than 90 dB μ V (e.m.f.), except at frequencies on which spurious responses are found (see clause 9.6).

9.9 Spurious emissions

9.9.1 Definition

Spurious emissions from the receiver are components at any frequency, present at the receiver input port.

The level of spurious emissions shall be measured as the power level at the antenna.

9.9.2 Method of measuring the power level

Spurious emissions shall be measured as the power level of any discrete signal at the input terminals of the receiver. The receiver input terminals are connected to a spectrum analyser or selective voltmeter having an input impedance of 50 Ω and the receiver is switched on.

If the detecting device is not calibrated in terms of power input, the level of any detected components shall be determined by a substitution method using a signal generator.

The measurements shall extend over the frequency range of 9 kHz to 2 GHz.

9.9.3 Limit

The power of any spurious emission shall not exceed 2 nW at any frequency in the range between 9 kHz and 2 GHz.

9.10 Receiver radiated spurious emissions

9.10.1 Definition

Radiated spurious emissions from the receiver are components at any frequency radiated by the equipment cabinet and the structure. This test is performed for both the telephony receiver and the DSC receiver.

9.10.2 Method of measurements

On a test site, selected from annex C, the equipment shall be placed at the specified height on a non-conducting support and in position closest to normal use as declared by the manufacturer.

The test antenna shall be orientated for vertical polarization and the length of the test antenna shall be chosen to correspond to the instantaneous frequency of the measuring receiver.

The output of the test antenna shall be connected to a measuring receiver.

The receiver shall be switched on without modulation, and measuring receiver shall be tuned over the frequency range 30 MHz to 2 GHz.

At each frequency at which a spurious component is detected:

- a) the test antenna shall be raised and lowered through the specified range of heights until a maximum signal level is detected on the measuring receiver;
- b) the receiver shall be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver;
- c) the maximum signal level detected by the measuring receiver shall be noted;
- d) the receiver shall be replaced by a substitution antenna as defined in annex C;

- e) the substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the spurious component detected;
- f) the substitution antenna shall be connected to a calibrated signal generator;
- g) the frequency of the calibrated signal generator shall be set to the frequency of the spurious component detected;
- h) the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver, if necessary;
- i) the test antenna shall be raised and lowered through the specified range of heights to ensure that the maximum signal is received;
- j) the input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver that is equal to the level noted while the spurious component was measured, corrected for the change of input attenuator setting of the measuring receiver;
- k) the input level to the substitution antenna shall be recorded as power level, corrected for the change of input attenuator setting of the measuring receiver;
- l) the measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization;
- m) the measure of the effective radiated power of the spurious components is larger of the two power levels recorded for spurious component at the input to the substitution antenna, corrected for the gain of the antenna if necessary.

9.10.3 Limit

The power of any spurious radiation shall not exceed 2 nW at any frequency in the range between 30 MHz and 2 GHz.

9.11 Receiver residual noise level

9.11.1 Definition

The receiver residual noise level is defined as the ratio, in dB, of the audio-frequency power of the noise and hum resulting from spurious effects of the power supply system or from other causes, to the audio-frequency power produced by a high-frequency signal of average level, modulated by the normal test modulation and applied to the receiver input.

9.11.2 Method of measurement

A test signal with a level of +30 dB μ V (e.m.f.) at a carrier frequency equal to the nominal frequency of the receiver, and modulated by the normal test modulation specified in clause 6.4, shall be applied to the receiver input. An audio frequency load shall be connected to the output terminals of the receiver. The audio frequency power control shall be set so as to produce the rated output power level conforming to clause 9.1.

The output signal shall be measured by a r.m.s. voltmeter having a -6 dB bandwidth of at least 20 kHz. The modulation shall then be switched off and the audio-frequency output level measured again.

9.11.3 Limit

The receiver residual noise level shall not exceed -40 dB.

9.12 Squelch operation

9.12.1 Definition

The purpose of the squelch facility is to mute the receiver audio output signal when the level of the signal at the receiver input is less than a given value.

9.12.2 Method of measurement

a) All equipment:

With the squelch facility switched off, a test signal of +30 dB μ V, at a carrier frequency equal to the nominal frequency of the receiver and modulated by the normal test modulation specified in clause 6.4, shall be applied to the input terminals of the receiver. An audio frequency load and a psophometric filtering network (clause 9.3.1) shall be connected to the output terminals of the receiver. The receiver's audio frequency power control shall be set so as to produce the rated output power defined in clause 9.1.

The output signal shall be measured with the aid of an rms voltmeter.

The input signal shall then be suppressed, the squelch facility switched on and the audio frequency output level measured again.

b) Equipment with a preset or automatic squelch:

With the squelch facility switched off again, a test signal modulated by the normal test modulation shall be applied to the receiver input at a level of +6 dB μ V (e.m.f) and the receiver shall be set to produce at least 50 % of the rated output power. The level of the input signal shall then be reduced and the squelch facility shall be switched on. The input signal shall then be increased until the above-mentioned output power is reached. The SINAD ratio and the input level shall then be measured.

c) Equipment with a user operated continuously variable squelch:

With the squelch facility switched off, a test signal with normal test modulation shall be applied to the receiver input at a level of +6 dB μ V (e.m.f), and the receiver shall be set to produce at least 50 % of the rated audio output power. The level of the input signal shall then be reduced and the squelch facility shall be switched on. The squelch shall then be at its maximum position and the level of the input signal increased until the output power returns to at least 50 % of the rated audio output power.

9.12.3 Limits

Under the conditions specified in a) clause 9.12.2, the audio frequency output power shall not exceed -40 dB relative to the rated output power.

Under the conditions specified in b) clause 9.12.2, the input level shall not exceed +6 dB μ V (e.m.f.) and the SINAD ratio shall be at least 20 dB.

Under the conditions specified in c) clause 9.12.2, the input signal shall not exceed +6 dB μ V (e.m.f.) when the control is set at maximum.

9.13 Squelch hysteresis

9.13.1 Definition

Squelch hysteresis is the difference in dB between the receiver input signal levels at which the squelch opens and closes.

9.13.2 Method of measurement

If there is any squelch control on the exterior of the equipment it shall be placed in its maximum muted position. With the squelch facility switched on, an unmodulated input signal at a carrier frequency equal to the nominal frequency of the receiver shall be applied to the input of the receiver at a level sufficiently low to avoid opening the squelch. The input signal shall be increased at the level just opening the squelch. This input level shall be recorded. With the squelch still open, the level of the input signal shall be slowly decreased until the squelch mutes the receiver audio output again.

9.13.3 Limit

The squelch hysteresis shall be between 3 dB and 6 dB.

9.14 Multiple watch characteristic

9.14.1 Definition

The scanning period is the time between the start of two successive samples of the priority channel in the absence of a signal on that channel.

The dwell time on the priority channel is the time between the start and finish of any sample of the priority channel in the absence of a signal on that channel.

The dwell time on the additional channel is the time between the start and finish of any sample of the additional channel.

9.14.2 Method of measurement

The equipment shall be adjusted to scan the priority channel and one additional channel.

The squelch shall be operational and so adjusted that the receiver just mutes on both the channels.

A test signal at the carrier frequency equal to the nominal frequency of the additional channel of the receiver, modulated by the normal test modulation (see clause 6.4) shall be connected to the receiver via a combining network (see clause 6.1). A second test signal with a frequency equal to the nominal frequency of the priority channel having no modulation shall be connected to the receiver via the other input of the combining network. The level of the two test signals shall be +12 dB μ V (e.m.f.) at the receiver input.

A storage oscilloscope shall be connected to the audio output. Initially the output of the test signal on the priority channel shall be switched off. The scanning process is started and the output observed on the oscilloscope. The gap between and the duration of the audio bursts shall be measured. Now the test signal on the priority channel shall be switched on and the scanning shall stop on the priority channel after the last burst and within the dwell time on the priority channel. The measurement shall be carried out where the additional channel is a simplex channel and repeated where it is a duplex channel.

The measurements shall be made under normal and under extreme test conditions.

9.14.3 Limits

The scanning period shall not exceed 2 s.

The dwell time on the priority channel shall not exceed 150 ms.

The dwell time on the additional channel shall be between 850 ms and 2 s as indicated by the time of the gap between two output bursts.

10 Receiver for DSC decoder

10.1 Maximum usable sensitivity

10.1.1 Definition

The maximum usable sensitivity of the receiver is the minimum level of the signal (e.m.f.) at the nominal frequency of the receiver which when applied to the receiver input with a test modulation will produce a bit error ratio of 10^{-2} .

10.1.2 Method of measurement

DSC standard test signal (see clause 6.9) containing DSC calls shall be applied to the receiver input. The input level shall be $0 \text{ dB}\mu\text{V}$ under normal test conditions (see clause 6.13) and $+6 \text{ dB}\mu\text{V}$ under extreme test conditions (see clauses 6.14.1 and 6.14.2 applied simultaneously).

The measurement shall be repeated under normal test conditions at the nominal carrier frequency $\pm 1,5 \text{ kHz}$.

The bit error ratio in the decoder output shall be determined as described in clause 6.10.

10.1.3 Limits

The bit error ratio shall be equal to or less than 10^{-2} .

10.2 Co-channel rejection

10.2.1 Definition

The co-channel rejection is a measure of the capability of the receiver to receive a wanted modulated signal without exceeding a given degradation due to the presence of an unwanted modulated signal, both signals being at the nominal frequency of the receiver.

10.2.2 Method of measurement

The two input signals shall be connected to the receiver input terminal via a combining network (see clause 6.1). The wanted signal shall be the DSC standard test signal (see clause 6.9) containing DSC calls. The level of the wanted signal shall be $+3 \text{ dB}\mu\text{V}$. The unwanted signal shall be modulated by 400 Hz with a deviation of $\pm 3 \text{ kHz}$. Both input signals shall be at the nominal frequency of the receiver under test and the measurement shall be repeated for displacements of the unwanted signal of up to $\pm 3 \text{ kHz}$.

The input level of the unwanted signal shall be $-5 \text{ dB}\mu\text{V}$.

The bit error ratio in the decoder output shall be determined as described in clause 6.10.

10.2.3 Limits

The bit error ratio shall be equal to or less than 10^{-2} .

10.3 Adjacent channel selectivity

10.3.1 Definition

The adjacent channel selectivity is a measure of the capability of the receiver to receive a wanted modulated signal without exceeding a given degradation due to the presence of an unwanted modulated signal which differs in frequency from the wanted signal by 25 kHz .

10.3.2 Method of measurement

The two input signals shall be connected to the receiver input terminal via a combining network (see clause 6.1).

The wanted signal shall be the DSC standard test signal (see clause 6.9) containing DSC calls. The level of the wanted signal shall be +3 dB μ V under normal test conditions and +9 dB μ V under extreme test conditions.

The unwanted signal shall be modulated to 400 Hz with a deviation of ± 3 kHz. The unwanted signal shall be tuned to the centre frequency of the upper adjacent channel. The input level of the unwanted signal shall be 73 dB μ V under normal test conditions and 63 dB μ V under extreme test conditions.

The bit error ratio in the decoder output shall be determined as described in clause 6.10.

The measurement shall be repeated with the unwanted signal tuned to the centre frequency of the lower adjacent channel.

The measurement shall be carried out under normal test conditions (see clause 6.13) and under extreme test conditions (see clauses 6.14.1 and 6.14.2 applied simultaneously).

10.3.3 Limits

The bit error ratio shall be equal to or less than 10^{-2} .

10.4 Spurious response and blocking immunity

10.4.1 Definition

The spurious response and blocking immunity is a measure of the capability of the receiver to receive a wanted modulated signal without exceeding a given degradation due to the presence of an unwanted modulated signal with frequencies outside the pass band of the receiver.

10.4.2 Method of measurement

The two input signals shall be connected to the receiver input terminal via a combining network (see clause 6.1).

The wanted signal shall be the DSC standard test signal (see clause 6.9) containing DSC calls. The level of the wanted signal shall be +3 dB μ V.

For the spurious response test the unwanted signal shall be unmodulated. The frequency shall be varied over the range 9 kHz to 2 GHz with the exception of the channel of the wanted signal and its adjacent channels. The unwanted signal level shall be 73 dB μ V. Where spurious response occurs, the bit error ratio shall be determined.

For the blocking test the unwanted signal shall be unmodulated. The frequency shall be varied between -10 MHz and -1 MHz and also between +1 MHz and +10 MHz relative to the nominal frequency of the wanted signal. The unwanted signal shall be at a level of 93 dB μ V. Where blocking occurs, the bit error ratio shall be determined.

The bit error ratio in the decoder output shall be determined as described in clause 6.10.

10.4.3 Limits

The bit error ratio shall be equal to or less than 10^{-2} .

10.5 Intermodulation response

10.5.1 Definition

The intermodulation response is a measure of the capability of the receiver to receive a wanted modulated signal without exceeding a given degradation due to the presence of two or more unwanted signals with a specific frequency relationship to the wanted signal frequency.

10.5.2 Method of measurement

The three input signals shall be connected to the receiver input terminal via a combining network (see clause 6.1).

The wanted signal represented by signal generator A shall be at the nominal frequency of the receiver and shall be the DSC standard test signal (see clause 6.9) containing DSC calls. The level of the wanted signal shall be +3 dB μ V.

The unwanted signals shall be applied, both at the same level. The unwanted signal from signal generator B shall be unmodulated and adjusted to a frequency 50 kHz above (or below) the nominal frequency of the receiver. The second unwanted signal from signal generator C shall be modulated by 400 Hz with a deviation of ± 3 kHz and adjusted to a frequency 100 kHz above (or below) the nominal frequency of the receiver.

The input level of the unwanted signals shall be 68 dB μ V.

The bit error ratio in the decoder output shall be determined as described in clause 6.10.

10.5.3 Limits

The bit error ratio shall be equal to or less than 10^{-2} .

10.6 Dynamic range

10.6.1 Definition

The dynamic range of the equipment is the range from the minimum to the maximum level of a radio frequency input signal at which the bit error ratio in the output of the decoder does not exceed a specified value.

10.6.2 Method of measurement

A test signal in accordance with the DSC standard test signal (see clause 6.9) containing consecutive DSC calls, shall be applied to the receiver input. The level of the test signal shall alternate between 100 dB μ V and 0 dB μ V.

The bit error ratio in the decoder output shall be determined as described in clause 6.10.

10.6.3 Limit

The bit error ratio shall be equal to or less than 10^{-2} .

10.7 Spurious emissions

10.7.1 Definition

Spurious emissions from the receiver are components at any frequency, present at the receiver input port.

The level of spurious emissions shall be measured as the power level at the antenna.

10.7.2 Method of measuring the power level

Spurious emissions shall be measured as the power level of any discrete signal at the input terminals of the receiver. The receiver input terminals are connected to a spectrum analyser or selective voltmeter having an input impedance of 50 Ω and the receiver is switched on.

If the detecting device is not calibrated in terms of power input, the level of any detected components shall be determined by a substitution method using a signal generator.

The measurements shall extend over the frequency range of 9 kHz to 2 GHz.

10.7.3 Limit

The power of any spurious emission shall not exceed 2 nW at any frequency in the range between 9 kHz and 2 GHz.

10.8 Verification of correct decoding of various types of DSC calls

10.8.1 Definition

DSC call sequences are calls that comply with ITU-R Recommendation M.493-11 [5].

10.8.2 Method of measurement

The input terminal of the receiver shall be suitably connected to a calibrated apparatus for generation of digital selective call signals.

DSC calls as specified in annex A shall be applied to the receiver.

10.8.3 Requirement

The requirements of ITU-R Recommendation M.493-11 [5] regarding message composition and content shall be met.

The decoded call sequences at the output of the receiver shall be examined for correct technical format, including error-check characters.

When receiver measurements are made by use of a printer or a computer, a check shall be made to ensure accordance between printer output and display indication.

It shall be verified that the equipment is capable of switching to a channel identified in the DSC call.

The telecommands used and channels tested for switching shall be stated in the test report.

10.9 Reaction to VTS and AIS channel management DSC transmissions

10.9.1 Definition

VTS and AIS channel management DSC transmissions are any DSC transmissions that are in accordance with ITU-R Recommendation M.825-3 [8] or ITU-R Recommendation M.1371-1 [11].

10.9.2 Method of measurement

The input terminal of the receiver shall be connected as per clause 10.8.2. DSC polling and regional channel management in accordance with Annex 3 of ITU-R Recommendation M.1371-1 [11] shall be applied to the receiver. A DSC transmission of format specifier symbol 112 and then with 116, category symbol 103, and otherwise similar to a distress call described in table 4 of ITU-R Recommendation M.493-11 [5] shall also be made.

10.9.3 Requirement

The equipment shall not sound an alarm, display a message (an accurate, informative display is permissible but not required), transmit a response or suggest a transmitted response, lock up, or require operator intervention.

10.10 Simultaneous reception

10.10.1 Definition

Simultaneous reception is the ability of the unit to correctly receive DSC traffic and radiotelephony traffic at the same time.

10.10.2 Method of measurement

The radiotelephone shall be set for operation on channel 16.

Two input signals shall be connected to the receiver input terminal via combining network (see clause 6.1).

The radiotelephone test signal shall be at a carrier frequency equal to the nominal frequency of the receiver, modulated by the normal test modulation (see clause 6.4) shall be applied to the receiver input.

An audiofrequency load and a measuring instrument for measuring SINAD ratio (through a psophometric network as specified in clause 9.3.1) shall be connected to the receiver output terminals.

The radiotelephone test signal level shall be set for +20 dB μ V.

The SINAD shall be measured with and without the presence of the DSC test signal.

The DSC standard test signal input level shall be 0 dB μ V (see clause 6.9) containing DSC calls.

The bit error ratio in the decoder output shall be determined as described in clause 6.10.

10.10.3 Limits

For radiotelephony operation the SINAD ratio shall be no less than 20 dB in the presence of the DSC test signal.

The DSC bit error ratio shall be equal to or less than 10^{-2} .

11 Electromagnetic compatibility

11.1 Emissions and immunity tests

Emissions and immunity shall be determined as specified in EN 301 843-2 [12] and comply to the limits contained therein.

Annex A (normative): DSC Calls

Table A.1: DSC calls

Format Specifier	Category	1st Telecommand (Symbol No.)	Receive	Transmit
Distress		F3E/G3E simplex (100)	X	X
All ships	Distress	Distress Ack (110)	X	
All ships	Distress	Distress Relay (112)	X	
All ships	Urgency	F3E/G3E simplex (100)	X	X
All ships	Safety	F3E/G3E simplex (100)	X	X
Individual	Urgency	F3E/G3E simplex (100)	X	
Individual	Safety	F3E/G3E simplex (100)	X	
Individual	Routine	F3E/G3E simplex (100)	X	X
Individual	Routine	Unable to comply (104)	X	X
Group	Routine	F3E/G3E simplex (100)	X	X
2 nd Telecommand Transmit and Receive (126) No information Transmit and Receive (108) Unable to use proposed channel				

Table A.2: DSC calls to ITU-R Recommendation M.821-1

Expansion data specifier	Receive	Transmit
100 Enhanced position resolution	X	X

Annex B (normative): Measuring receiver for adjacent channel power measurement

B.1 Power measuring receiver specification

The power measuring receiver consists of a mixer, an IF filter, an oscillator, an amplifier, a variable attenuator and an r.m.s. value indicator. Instead of the variable attenuator with the r.m.s. value indicator it is also possible to use an r.m.s. voltmeter calibrated in dB. The technical characteristics of the power measuring receiver are given below (see also ITU-R Recommendation SM 332-4 [7]).

B.1.1 IF filter

The IF filter shall be within the limits of the following selectivity characteristics.

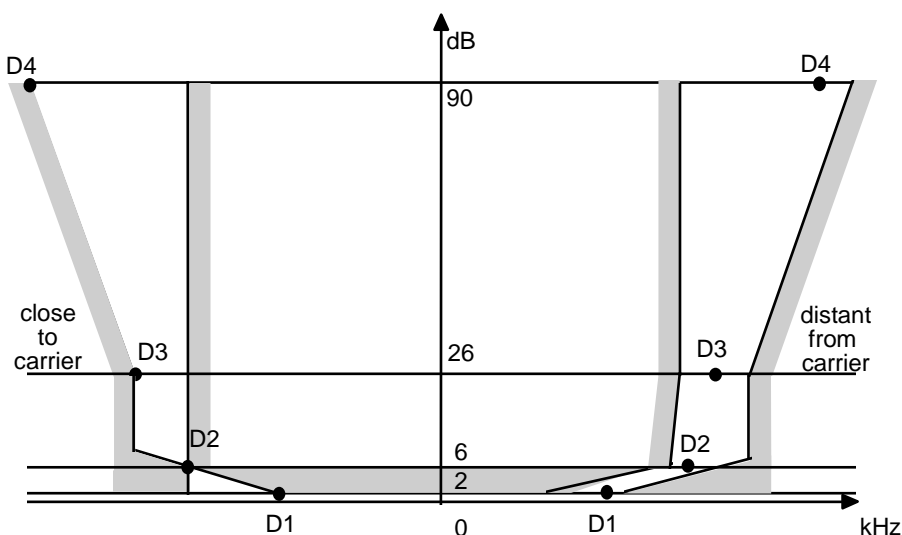


Figure B.1: IF filter characteristics

The selectivity characteristics shall keep the frequency separations shown in table B.1 from the nominal centre frequency of the adjacent channel.

Table B.1: Selectivity characteristic

Channel separation (kHz)	Frequency separation of filter curve from nominal centre frequency of adjacent channel (kHz)			
	D1	D2	D3	D4
12,5	3	4,25	5,5	9,5
25	5	8,0	9,25	13,25

The attenuation points shall not exceed following tolerances shown in table B.2.

Table B.2: Tolerance of attenuation points close to carrier

Channel separation (kHz)	Tolerance range (kHz)			
	D1	D2	D3	D4
12,5	+1,35	±0,1	-1,35	-5,35
25	+3,1	±0,1	-1,35	-5,35

Table B.3: Tolerance of attenuation points distant from the carrier

Channel separation (kHz)	Tolerance range (kHz)			
	D1	D2	D3	D4
12,5	±2,0	±2,0	±2,0	+2,0 -6,0
25	±3,5	±3,5	±3,5	+3,5 -7,5

The minimum attenuation of the filter outside the 90 dB attenuation points shall be equal to or greater than 90 dB.

B.1.2 Attenuation indicator

The attenuation indicator shall have a minimum range of 80 dB and a reading accuracy of 1 dB. With a view to future regulations an attenuation of 90 dB or more is recommended.

B.1.3 r.m.s. value indicator

The instrument shall accurately indicate non-sinusoidal signals in ratio of up to 10:1 between peak value and r.m.s. value.

B.1.4 Oscillator and amplifier

The oscillator and the amplifier shall be designed in such a way that the measurement of the adjacent channel power of a low-noise unmodulated transmitter, whose self-noise has a negligible influence on the measurement result, yields a measured value of less than -90 dB.

Annex C (normative): Radiated measurement

C.1 Test sites and general arrangements for measurements involving the use of radiated fields

This normative annex introduces three most commonly available test sites, an anechoic chamber, an anechoic chamber with a ground plane and an Open Area Test Site (OATS), which may be used for radiated tests. These test sites are generally referred to as free field test sites. Both absolute and relative measurements can be performed in these sites. Where absolute measurements are to be carried out, the chamber should be verified. A detailed verification procedure is described in TR 102 273 [16] relevant parts 2, 3 and 4.

NOTE: To ensure reproducibility and traceability of radiated measurements only these test sites should be used in test measurements.

C.1.1 Anechoic chamber

An anechoic chamber is an enclosure, usually shielded, whose internal walls, floor and ceiling are covered with radio absorbing material, normally of the pyramidal urethane foam type. The chamber usually contains an antenna support at one end and a turntable at the other. A typical anechoic chamber is shown in figure C.1.

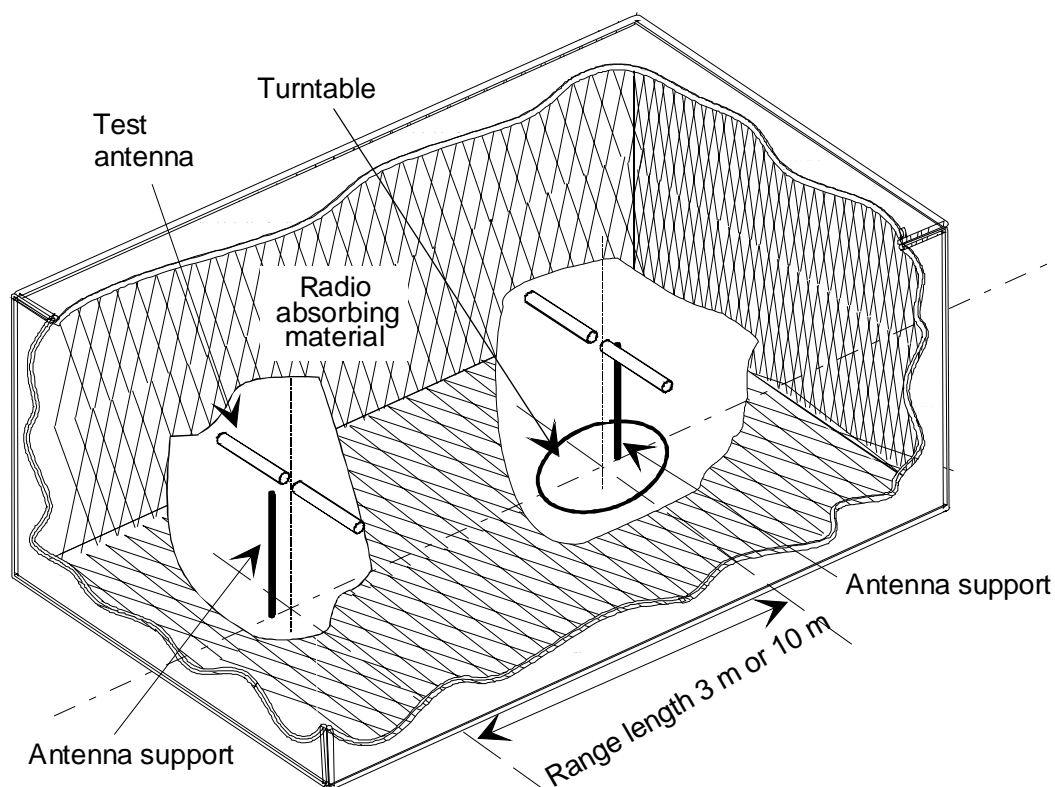


Figure C.1: A typical anechoic chamber

The chamber shielding and radio absorbing material work together to provide a controlled environment for testing purposes. This type of test chamber attempts to simulate free space conditions.

The shielding provides a test space, with reduced levels of interference from ambient signals and other outside effects, whilst the radio absorbing material minimizes unwanted reflections from the walls and ceiling which can influence the measurements. In practice it is relatively easy for shielding to provide high levels (80 dB to 140 dB) of ambient interference rejection, normally making ambient interference negligible.

A turntable is capable of rotation through 360° in the horizontal plane and it is used to support the test sample (EUT) at a suitable height (e.g. 1 m) above the ground plane. The chamber shall be large enough to allow the measuring distance of at least 3 m or $2(d_1+d_2)^2/\lambda$ (m), whichever is greater (see clause C.2.5). The distance used in actual measurements shall be recorded with the test results.

The anechoic chamber generally has several advantages over other test facilities. There is minimal ambient interference, minimal floor, ceiling and wall reflections and it is independent of the weather. It does however have some disadvantages which include limited measuring distance and limited lower frequency usage due to the size of the pyramidal absorbers. To improve low frequency performance, a combination structure of ferrite tiles and urethane foam absorbers is commonly used.

All types of emission, sensitivity and immunity testing can be carried out within an anechoic chamber without limitation.

C.1.2 Anechoic chamber with a ground plane

An anechoic chamber with a ground plane is an enclosure, usually shielded, whose internal walls and ceiling are covered with radio absorbing material, normally of the pyramidal urethane foam type. The floor, which is metallic, is not covered and forms the ground plane. The chamber usually contains an antenna mast at one end and a turntable at the other. A typical anechoic chamber with a ground plane is shown in figure C.2.

This type of test chamber attempts to simulate an ideal OATS whose primary characteristic is a perfectly conducting ground plane of infinite extent.

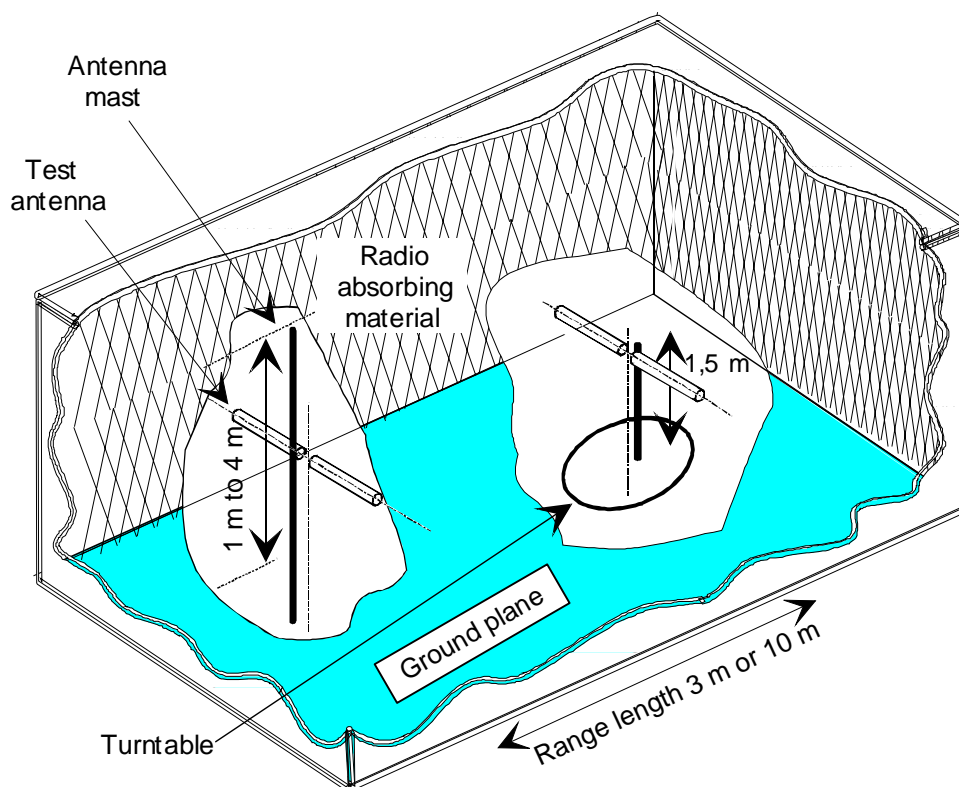


Figure C.2: A typical anechoic chamber with a ground plane

In this facility the ground plane creates the wanted reflection path, such that the signal received by the receiving antenna is the sum of the signals from both the direct and reflected transmission paths. This creates a unique received signal level for each height of the transmitting antenna (or EUT) and the receiving antenna above the ground plane.

The antenna mast provides a variable height facility (from 1 to 4 m) so that the position of the test antenna can be optimized for maximum coupled signal between antennas or between an EUT and the test antenna.

A turntable is capable of rotation through 360° in the horizontal plane and it is used to support the test sample (EUT) at a specified height, usually 1,5 m. above the ground plane. The chamber shall be large enough to allow the measuring distance of at least 3 m or $2(d_1+d_2)^2/\lambda$ (m), whichever is greater (see clause C.2.5). The distance used in actual measurements shall be recorded with the test results.

Emission testing involves firstly "peaking" the field strength from the EUT by raising and lowering the receiving antenna on the mast (to obtain the maximum constructive interference of the direct and reflected signals from the EUT) and then rotating the turntable for a "peak" in the azimuth plane. At this height of the test antenna on the mast, the amplitude of the received signal is noted. Secondly the EUT is replaced by a substitution antenna (positioned at the EUT's phase or volume centre) which is connected to a signal generator. The signal is again "peaked" and the signal generator output adjusted until the level, noted in stage one, is again measured on the receiving device.

Receiver sensitivity tests over a ground plane also involve "peaking" the field strength by raising and lowering the test antenna on the mast to obtain the maximum constructive interference of the direct and reflected signals, this time using a measuring antenna which has been positioned where the phase or volume centre of the EUT will be during testing. A transform factor is derived. The test antenna remains at the same height for stage two, during which the measuring antenna is replaced by the EUT. The amplitude of the transmitted signal is reduced to determine the field strength level at which a specified response is obtained from the EUT.

C.1.3 OATS

An OATS comprises a turntable at one end and an antenna mast of variable height at the other end above a ground plane which, in the ideal case, is perfectly conducting and of infinite extent. In practice, whilst good conductivity can be achieved, the ground plane size has to be limited. A typical OATS is shown in figure C.3.

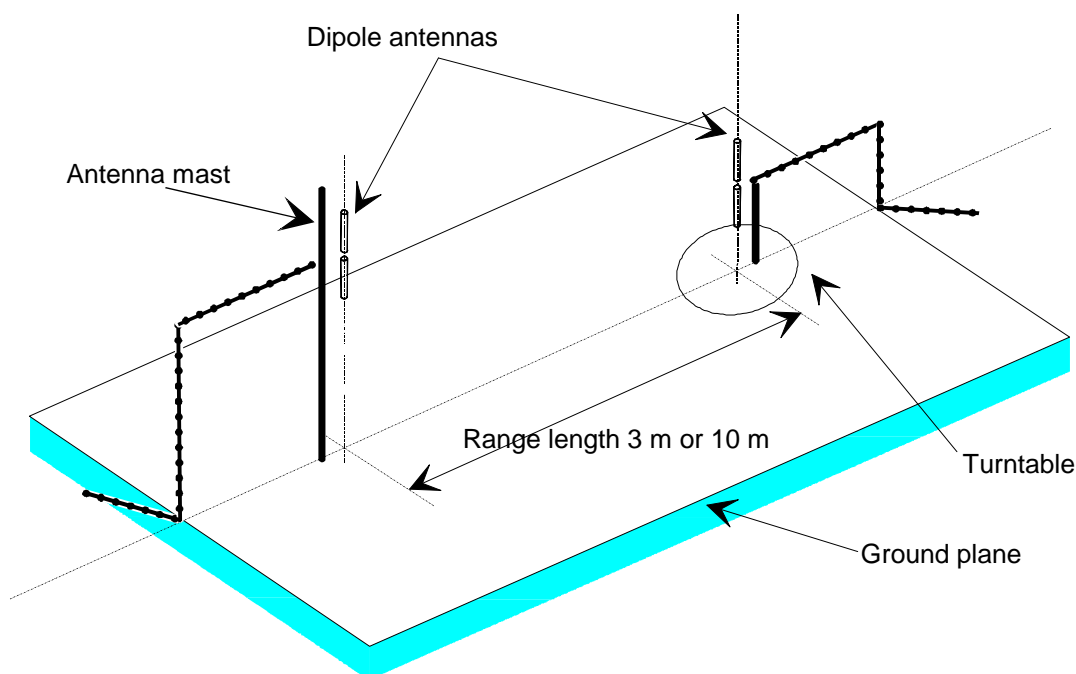


Figure C.3: A typical OATS

The ground plane creates a wanted reflection path, such that the signal received by the receiving antenna is the sum of the signals received from the direct and reflected transmission paths. The phasing of these two signals creates a unique received level for each height of the transmitting antenna (or EUT) and the receiving antenna above the ground plane.

Site qualification concerning antenna positions, turntable, measurement distance and other arrangements are same as for anechoic chamber with a ground plane. In radiated measurements an OATS is also used by the same way as anechoic chamber with a ground plane.

Typical measuring arrangement common for ground plane test sites is presented in figure C.4.

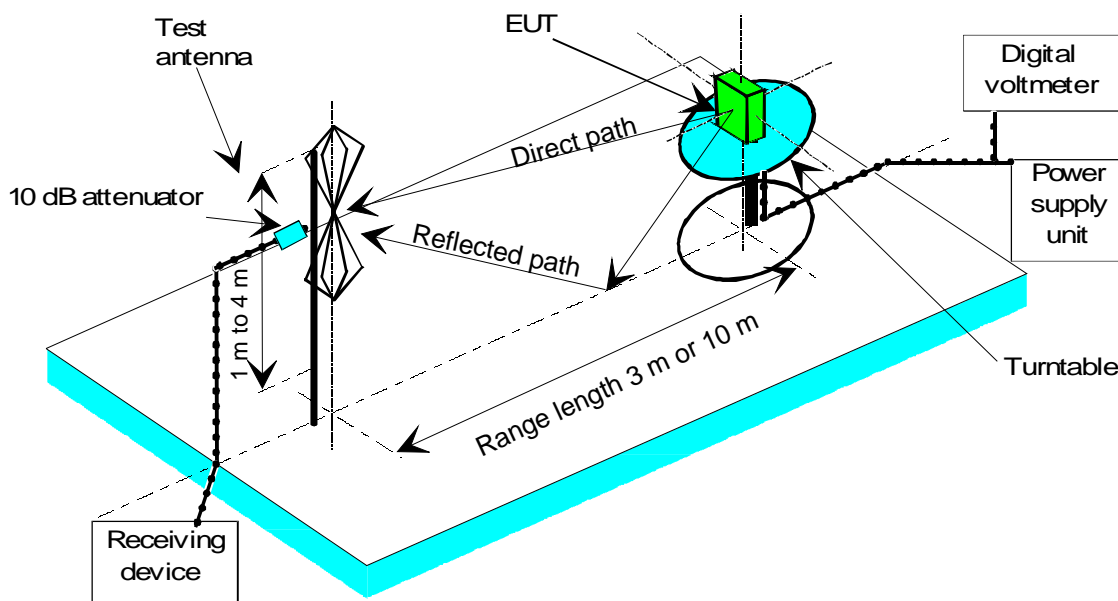


Figure C.4: Measuring arrangement on ground plane test site (OATS set-up for spurious emission testing)

C.1.4 Test antenna

A test antenna is always used in radiated test methods. In emission tests (i.e. frequency error, effective radiated power, spurious emissions and adjacent channel power) the test antenna is used to detect the field from the EUT in one stage of the measurement and from the substitution antenna in the other stage. When the test site is used for the measurement of receiver characteristics (i.e. sensitivity and various immunity parameters) the antenna is used as the transmitting device.

The test antenna should be mounted on a support capable of allowing the antenna to be used in either horizontal or vertical polarization which, on ground plane sites (i.e. anechoic chambers with ground planes and OATS), should additionally allow the height of its centre above the ground to be varied over the specified range (usually 1 m to 4 m).

In the frequency band 30 MHz to 1 000 MHz, dipole antennas (constructed in accordance with ANSI C63.5 [15]) are generally recommended. For frequencies of 80 MHz and above, the dipoles should have their arm lengths set for resonance at the frequency of test. Below 80 MHz, shortened arm lengths are recommended. For spurious emission testing, however, a combination of bicones and log periodic dipole array antennas (commonly termed "log periodics") could be used to cover the entire 30 MHz to 1 000 MHz band. Above 1 000 MHz, waveguide horns are recommended although, again, log periodics could be used.

NOTE: The gain of a horn antenna is generally expressed relative to an isotropic radiator.

C.1.5 Substitution antenna

The substitution antenna is used to replace the EUT for tests in which a transmitting parameter (i.e. frequency error, effective radiated power, spurious emissions and adjacent channel power) is being measured. For measurements in the frequency band 30 MHz to 1 000 MHz, the substitution antenna should be a dipole antenna (constructed in accordance with ANSI C63.5 [15]). For frequencies of 80 MHz and above, the dipoles should have their arm lengths set for resonance at the frequency of test. Below 80 MHz, shortened arm lengths are recommended. For measurements above 1 000 MHz, a waveguide horn is recommended. The centre of this antenna should coincide with either the phase centre or volume centre (as specified in the test method) of the EUT it has replaced.

C.1.6 Measuring antenna

The measuring antenna is used in tests on an EUT in which a receiving parameter (i.e. sensitivity and various immunity tests) is being measured. Its purpose is to enable a measurement of the electric field strength in the vicinity of the EUT. For measurements in the frequency band 30 MHz to 1 000 MHz, the measuring antenna should be a dipole antenna (constructed in accordance with ANSI C63.5 [15]). For frequencies of 80 MHz and above, the dipoles should have their arm lengths set for resonance at the frequency of test. Below 80 MHz, shortened arm lengths are recommended. The centre of this antenna should coincide with either the phase centre or volume centre (as specified in the test method) of the EUT.

C.2 Guidance on the use of radiation test sites

This clause details procedures, test equipment arrangements and verification that should be carried out before any of the radiated test are undertaken. These schemes are common to all types of test sites described in this annex.

C.2.1 Verification of the test site

No test should be carried out on a test site which does not possess a valid certificate of verification. The verification procedures for the different types of test sites described in this annex (i.e. anechoic chamber, anechoic chamber with a ground plane and OATS) are given in TR 102 273 [16] parts 2, 3 and 4, respectively.

C.2.2 Preparation of the EUT

The manufacturer should supply information about the EUT covering the operating frequency, polarization, supply voltage(s) and the reference face. Additional information, specific to the type of EUT should include, where relevant, carrier power, CSP, whether different operating modes are available (e.g. high and low power modes) and if operation is continuous or is subject to a maximum test duty cycle (e.g. 1 m on, 4 m off).

Where necessary, a mounting bracket of minimal size should be available for mounting the EUT on the turntable. This bracket should be made from low conductivity, low relative dielectric constant (i.e. less than 1,5) material(s) such as expanded polystyrene, balsawood, etc.

C.2.3 Power supplies to the EUT

All tests should be performed using power supplies wherever possible, including tests on EUT designed for battery-only use. In all cases, power leads should be connected to the EUT's supply terminals (and monitored with a digital voltmeter) but the battery should remain present, electrically isolated from the rest of the equipment, possibly by putting tape over its contacts.

The presence of these power cables can, however, affect the measured performance of the EUT. For this reason, they should be made to be "transparent" as far as the testing is concerned. This can be achieved by routing them away from the EUT and down to the either the screen, ground plane or facility wall (as appropriate) by the shortest possible paths. Precautions should be taken to minimize pick-up on these leads (e.g. the leads could be twisted together, loaded with ferrite beads at 0,15 m spacing or otherwise loaded).

Details shall be included in the test report.

C.2.4 Volume control setting for analogue speech tests

Unless otherwise stated, in all receiver measurements for analogue speech the receiver volume control where possible, should be adjusted to give at least 50 % of the rated audio output power. In the case of stepped volume controls, to volume control should be set to the first step that provides an output power of at least 50 % of the rated audio output power. This control should not be readjusted between normal and extreme test conditions in tests.

C.2.5 Range length

The range length for all these types of test facility should be adequate to allow for testing in the far-field of the EUT i.e. it should be equal to or exceed:

$$\frac{2(d_1+d_2)^2}{\lambda}$$

where:

- d_1 is the largest dimension of the EUT/dipole after substitution (m);
- d_2 is the largest dimension of the test antenna (m);
- λ is the test frequency wavelength (m).

It should be noted that in the substitution part of this measurement, where both test and substitution antennas are half wavelength dipoles, this minimum range length for far-field testing would be:

$$2\lambda$$

It should be noted in the test report when either of these conditions is not met so that the additional measurement uncertainty can be incorporated into the results.

NOTE 1: **For the fully anechoic chamber**, no part of the volume of the EUT should, at any angle of rotation of the turntable, fall outside the "quiet zone" of the chamber at the nominal frequency of the test.

NOTE 2: The "quiet zone" is a volume within the anechoic chamber (without a ground plane) in which a specified performance has either been proven by test, or is guaranteed by the designer/manufacture. The specified performance is usually the reflectivity of the absorbing panels or a directly related parameter (e.g. signal uniformity in amplitude and phase). It should be noted however that the defining levels of the quiet zone tend to vary.

NOTE 3: **For the anechoic chamber with a ground plane**, a full height scanning capability, i.e. 1 m to 4 m, should be available for which no part of the test antenna should come within 1 m of the absorbing panels. For both types of **anechoic chamber**, the reflectivity of the absorbing panels should not be worse than -5 dB.

NOTE 4: **For both the anechoic chamber with a ground plane and the OATS**, no part of any antenna should come within 0,25 m of the ground plane at any time throughout the tests. Where any of these conditions cannot be met, measurements should not be carried out.

C.2.6 Site preparation

The cables for both ends of the test site should be routed horizontally away from the testing area for a minimum of 2 m (unless, in the case both types of **anechoic chamber**, a back wall is reached) and then allowed to drop vertically and out through either the ground plane or screen (as appropriate) to the test equipment. Precautions should be taken to minimize pick up on these leads (e.g. dressing with ferrite beads, or other loading). The cables, their routing and dressing should be identical to the verification set-up.

NOTE: For ground reflection test sites (**i.e. anechoic chambers with ground planes and OATS**) which incorporate a cable drum with the antenna mast, the 2 m requirement may be impossible to comply with.

Calibration data for all items of test equipment should be available and valid. For test, substitution and measuring antennas, the data should include gain relative to an isotropic radiator (or antenna factor) for the frequency of test. Also, the VSWR of the substitution and measuring antennas should be known.

The calibration data on all cables and attenuators should include insertion loss and VSWR throughout the entire frequency range of the tests. All VSWR and insertion loss figures should be recorded in the log book results sheet for the specific test.

Where correction factors/tables are required, these should be immediately available.

For all items of test equipment, the maximum errors they exhibit should be known along with the distribution of the error e.g.:

- cable loss: $\pm 0,5$ dB with a rectangular distribution;
- measuring receiver: 1,0 dB (standard deviation) signal level accuracy with a Gaussian error distribution.

At the start of measurements, system checks should be made on the items of test equipment used on the test site.

C.3 Coupling of signals

C.3.1 General

The presence of leads in the radiated field may cause a disturbance of that field and lead to additional measurement uncertainty. These disturbances can be minimized by using suitable coupling methods, offering signal isolation and minimum field disturbance (e.g. optical and acoustic coupling).

C.3.2 Data signals

Isolation can be provided by the use of optical, ultra sonic or infra red means. Field disturbance can be minimized by using a suitable fibre optic connection. Ultra sonic or infra red radiated connections require suitable measures for the minimization of ambient noise.

C.3.3 Speech and analogue signals

Where an audio output socket is not available an acoustic coupler should be used.

When using the acoustic coupler, care should be exercised that possible ambient noise does not influence the test result.

C.3.3.1 Acoustic coupler description

The acoustic coupler comprises a plastic funnel, an acoustic pipe and a microphone with a suitable amplifier. The materials used to fabricate the funnel and pipe should be of low conductivity and of low relative dielectric constant (i.e. less than 1,5).

- the acoustic pipe should be long enough to reach from the EUT to the microphone which should be located in a position that will not disturb the RF field. The acoustic pipe should have an inner diameter of about 6 mm and a wall thickness of about 1,5 mm and should be sufficiently flexible so as not to hinder the rotation of the turntable;
- the plastic funnel should have a diameter appropriate to the size of the loudspeaker in the EUT, with soft foam rubber glued to its edge, it should be fitted to one end of the acoustic pipe and the microphone should be fitted to the other end. It is very important to fix the centre of the funnel in a reproducible position relative to the EUT, since the position of the centre has a strong influence on the frequency response that will be measured. This can be achieved by placing the EUT in a close fitting acoustic mounting jig, supplied by the manufacturer, of which the funnel is an integral part;

- the microphone should have a response characteristic flat within 1 dB over a frequency range of 50 Hz to 20 kHz, a linear dynamic range of at least 50 dB. The sensitivity of the microphone and the receiver audio output level should be suitable to measure a signal to noise ratio of at least 40 dB at the nominal audio output level of the EUT. Its size should be sufficiently small to couple to the acoustic pipe;
- the frequency correcting network should correct the frequency response of the acoustic coupler so that the acoustic SINAD measurement is valid (see IEC 60489-3 [14] appendix F).

C.3.3.2 Calibration

The aim of the calibration of the acoustic coupler is to determine the acoustic SINAD ratio which is equivalent to the SINAD ratio at the receiver output.

Annex D (informative): Description of the equipment

The emphasis in the present document is on simplicity of operation. The VHF equipment uses DSC controllers based on Class D which will probably be integrated in the VHF radio equipment but in any event will have the capability to select the radio channels automatically. An input for position information in EN 61162-1 [4] format is a requirement and the use of automatic position updating is to be encouraged.

Distress calls may only be made by means of a protected dedicated button. Furthermore channel 16 is required to be selected automatically after transmission of a distress or urgency call or receipt of a distress, distress relay, or urgency call.

Routine calls require only the input of the called MMSI and a channel number in the case of a ship to ship call. For incoming calls the radio is required to select automatically the channel number given in the message. Means are provided for the user to enter a temporary group MMSI to permit calling amongst a group of related vessels.

The intended aim of designers of equipment to the present document is that it should take no longer than 10 min for an operator to learn to use the equipment. This is achieved by the provision of clear simple menus with the most frequently used functions at the top of the menu tree.

As an aid to safety, it is a requirement, in order to prevent the transmission of DSC calls from an unidentifiable ship, that DSC operation is inhibited on a new equipment until the vessel's own MMSI has been entered.

Equipment designed to the present document is fitted with a 50 Ω external antenna socket or connector for use on board vessels and operates in the bands between 156 MHz and 174 MHz allocated to the maritime mobile service as detailed in appendix 18 to the Radio Regulations [1].

History

Document history		
V1.1.1	August 1998	Publication as EN 301 025
V1.1.2	August 2000	Publication
V1.2.1	September 2004	Publication
V1.3.1	September 2006	One-step Approval Procedure OAP 20070119: 2006-09-20 to 2007-01-19