ETSI TS 136 521-3 V9.5.0 (2011-11)



LTE;

Evolved Universal Terrestrial Radio Access (E-UTRA);
User Equipment (UE) conformance specification;
Radio transmission and reception;
Part 3: Radio Resource Management (RRM)
conformance testing
(3GPP TS 36.521-3 version 9.5.0 Release 9)



Reference RTS/TSGR-0536521-3v950 Keywords LTE

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from: <u>http://www.etsi.org</u>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

http://portal.etsi.org/tb/status/status.asp

If you find errors in the present document, please send your comment to one of the following services: http://portal.etsi.org/chaircor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2011. All rights reserved.

DECTTM, **PLUGTESTS**TM, **UMTS**TM and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members. **3GPP**TM and **LTE**TM are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://ipr.etsi.org).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under http://webapp.etsi.org/key/queryform.asp.

Contents

Intelle	ectual Property Rights	2
Forew	ord	2
Forew	ord	22
Introd	uction	22
1	Scope	23
2	References	23
3	Definitions, symbols and abbreviations	24
3.1	Definitions	24
3.2	Symbols	24
3.3	Abbreviations	25
	Requirements for support of RRM	
3A.1	General	
3A.2	Requirements Classification for Statistical Testing	
3A.3	RRM Test Configurations	
3A.3.1		
3A.3.2		
3A.3.3		
3A.3.4	1 ,	
3A.3.5	Operating band configuration	28
4	E-UTRAN RRC_IDLE State Mobility	20
4 4.1	E-UTRAN Cell Selection	
4.2	E-UTRAN Cell Re-Selection	
4.2.1 4.2.1.1	E-UTRAN FDD - FDD cell re-selection intra frequency case	
	r r r	
4.2.1.2 4.2.1.3	T I	
4.2.1.3 4.2.1.4	1	
	•	
4.2.1.4 4.2.1.4		
	· · · · · · · · · · · · · · · · · · ·	
4.2.1.4	6	
4.2.1.5	1	
4.2.2	E-UTRAN TDD - TDD cell re-selection intra frequency case	
4.2.2.1	1 1	
4.2.2.2	11 *	
4.2.2.3	1	
4.2.2.4 4.2.2.4	1	
4.2.2.4	1	
4.2.2.4		
4.2.2.5	1	
4.2.3	E-UTRAN FDD - FDD cell re-selection inter frequency case	
4.2.3.1	1 1	
4.2.3.2	11 *	
4.2.3.3	1	
4.2.3.4	1	
4.2.3.4		
4.2.3.4	<u>.</u>	
4.2.3.4	č	
4.2.3.5	1	
4.2.4	E-UTRAN FDD - TDD cell re-selection inter frequency case	
4.2.5	E-UTRAN TDD - FDD cell re-selection inter frequency case	
4.2.6	E-UTRAN TDD - TDD cell re-selection inter frequency case	43

4.2.6.1	Test purpose	
4.2.6.2	Test applicability	
4.2.6.3	Minimum conformance requirements	
4.2.6.4	Test description	
4.2.6.4.1	Initial conditions	
4.2.6.4.2	Test procedure	
4.2.6.4.3	Message contents	
4.2.6.5	Test requirement	
	E-UTRAN to UTRAN Cell Re-Selection	
4.3.1	E-UTRAN FDD - UTRAN FDD cell re-selection	
4.3.1.1 4.3.1.1.1	E-UTRA FDD - UTRAN FDD cell reselection: UTRA FDD is of higher priority Test purpose	
4.3.1.1.2	• •	
4.3.1.1.2	Test applicability	
4.3.1.1.3	Test description	
4.3.1.1.4 4.3.1.1.4.1		
4.3.1.1.4.1		
4.3.1.1.4.3	<u>*</u>	
4.3.1.1.5	Test requirement	
4.3.1.2	E-UTRAN FDD - UTRAN FDD cell re-selection: UTRA FDD is of lower priority	
4.3.1.2.1	Test purpose	
4.3.1.2.2	Test applicability	
4.3.1.2.3	Minimum conformance requirements.	
4.3.1.2.4	Test description	
4.3.1.2.4.1	•	
4.3.1.2.4.2		
4.3.1.2.4.3		
4.3.1.2.5	Test requirement	5€
4.3.1.3	E-UTRAN FDD - UTRAN FDD cell re-selection in fading propagation conditions: UTRA FDD	
	is of lower priority	57
4.3.1.3.1	Test purpose	
4.3.1.3.2	Test applicability	
4.3.1.3.3	Minimum conformance requirements	58
4.3.1.3.4	Test description	58
4.3.1.3.4.1	Initial conditions	58
4.3.1.3.4.2	Test procedure	59
4.3.1.3.4.3	ϵ	
4.3.1.3.5	Test requirement	
4.3.2	E-UTRAN FDD - UTRAN TDD cell re-selection	
4.3.2.1	Test purpose	
4.3.2.2	Test applicability	
4.3.2.3	Minimum conformance requirements	
4.3.2.3.1	3.84Mcps TDD option	
4.3.2.3.2	1.28Mcps TDD option	
4.3.2.3.3	7.68Mcps TDD option	
4.3.2.4 4.3.2.4.1	Test description	
4.3.2.4.1	3.84Mcps TDD option	
4.3.2.4.2 4.3.2.4.2.1	1.28Mcps TDD option	
4.3.2.4.2.1		
4.3.2.4.2.3	1	
4.3.2.4.3	7.68 Mcps TDD option	
4.3.2.5	Test requirement	
4.3.2.5.1	3.84Mcps TDD option	
4.3.2.5.2	1.28Mcps TDD option	
4.3.2.5.3	7.68 Mcps TDD option	
4.3.3	E-UTRAN TDD - UTRAN FDD cell re-selection	
4.3.3.1	Test purpose	
4.3.3.2	Test applicability	
4.3.3.3	Minimum conformance requirements	
4.3.3.4	Test description	
4.3.3.4.1	Initial conditions	

4.3.3.4.2	Test procedure	69
4.3.3.4.3	Message contents	
4.3.3.5	Test requirement	
4.3.4	E-UTRAN TDD - UTRAN TDD cell re-selection	71
4.3.4.1	E-UTRA TDD - UTRAN TDD cell re-selection : UTRA is of higher priority	
4.3.4.1.1	Test purpose	
4.3.4.1.2	Test applicability	
4.3.4.1.3	Minimum conformance requirements	
4.3.4.1.4	Test description	
4.3.4.1.4.1		
4.3.4.1.4.2	T · · · · · · · · · · · · · · · · · · ·	
4.3.4.1.4.3		
4.3.4.1.5	Test requirement	
4.3.4.2	E-UTRAN TDD - UTRAN TDD cell re-selection: UTRA is of lower priority	
4.3.4.2.1	Test purpose	
4.3.4.2.2	Test applicability	
4.3.4.2.3	Minimum conformance requirements	
4.3.4.2.4	Test description	
4.3.4.2.4.1		
4.3.4.2.4.2	ı	
4.3.4.2.4.3 4.3.4.2.5	Message contents	
4.3.4.2.3	EUTRA TDD-UTRA TDD cell reselection in fading propagation conditions: UTRA TDD is of	
т.э.т.э	lower prioritylower priority	
4.3.4.3.1	Test purpose	
4.3.4.3.2	Test applicability	
4.3.4.3.3	Minimum conformance requirements	
4.3.4.3.4	Test description	
4.3.4.3.4.1		
4.3.4.3.4.2		
4.3.4.3.4.3		
4.3.4.3.5	Test requirement	
4.4	E-UTRAN to GSM Cell Re-Selection	85
4.4.1	E-UTRAN FDD - GSM cell re-selection	85
4.4.1.1	Test purpose	
4.4.1.2	Test applicability	
4.4.1.3	Minimum conformance requirements	
4.4.1.4	Test description	
4.4.1.4.1	Initial conditions	
4.4.1.4.2	Test procedure	
4.4.1.4.3	Message contents	
4.4.1.5	Test requirement	
4.4.2	E-UTRAN TDD - GSM cell re-selection	
4.4.2.1 4.4.2.2	Test purpose	
4.4.2.2 4.4.2.3	Test applicability	
4.4.2.3 4.4.2.4	Minimum conformance requirements	
4.4.2.4 4.4.2.4.1	Test description	
4.4.2.4.1 4.4.2.4.2	Test procedure	
4.4.2.4.2	Message contents	
4.4.2.5	Test requirement	
4.5	E-UTRAN to HRPD Cell Re-Selection.	
4.5.1	E-UTRAN FDD - HRPD Cell re-selection.	
4.5.1.1	E-UTRAN FDD - HRPD Cell Reselection: HRPD is of Lower Priority	
4.5.1.1.1	Test purpose	
4.5.1.1.2	Test applicability	
4.5.1.1.3	Minimum conformance requirements	
4.5.1.1.4	Test description	
4.5.1.1.5	Test requirement	
4.6	E-UTRAN to cdma2000 1xRTT Cell Re-Selection	
4.6.1	E-UTRAN FDD - cdma2000 1xRTT Cell re-selection	
4611	F-UTRAN FDD - cdma2000 by Cell Reselection; cdma2000 by is of Lower Priority	97

4.6.1.1.	1 1	
4.6.1.1.	11	
4.6.1.1.	1	
4.6.1.1.	T T T T T T T T T T T T T T T T T T T	
4.6.1.1.	.5 Test requirements	99
5	E-UTRAN RRC_CONNECTED State Mobility	100
5.1	E-UTRAN Handover	
5.1.1	E-UTRAN FDD-FDD Handover intra frequency case	
5.1.1.1	Test purpose	
5.1.1.2		
5.1.1.3	F F J	
5.1.1.4	<u> •</u>	
5.1.1.4.	•	
5.1.1.4.		
5.1.1.4.		
5.1.1.5	\mathcal{C}	
5.1.2	E-UTRAN TDD-TDD Handover intra frequency case	
5.1.2.1		
5.1.2.2		
5.1.2.3	Minimum conformance requirements	
5.1.2.4		
5.1.2.4.	•	
5.1.2.4.	.2 Test procedure	107
5.1.2.4.	.3 Message contents	108
5.1.2.5	Test requirement	109
5.1.3	E-UTRAN FDD-FDD Handover inter frequency case	111
5.1.3.1	Test purpose	111
5.1.3.2	11	111
5.1.3.3	Minimum conformance requirements	111
5.1.3.4	Test description	111
5.1.3.4.		
5.1.3.4.	1 · · · · · · · · · · · · · · · · · · ·	
5.1.3.4.	$\boldsymbol{\mathcal{C}}$	
5.1.3.5	4	
5.1.4	E-UTRAN TDD-TDD Handover inter frequency case	
5.1.4.1	Test purpose	116
5.1.4.2	11 -	
5.1.4.3	Minimum conformance requirements	
5.1.4.4	Test description	
5.1.4.4.		
5.1.4.4.	1	
5.1.4.4.	ϵ	
5.1.4.5	4	
5.1.5	E-UTRAN FDD-FDD inter frequency Handover: unknown target cell	
5.1.5.1	Test purpose	
5.1.5.2	11 -	
5.1.5.3	•	
5.1.5.4	1	
5.1.5.4.		
5.1.5.4.	1	
5.1.5.4.	e e e e e e e e e e e e e e e e e e e	
5.1.5.5	Test requirement	
5.1.6	E-UTRAN TDD-TDD inter frequency handover: unknown target cell	
5.1.6.1	Test applies hillity	
5.1.6.2		
5.1.6.3	1	
5.1.6.4	1	
5.1.6.4.		
5.1.6.4.	1	
5.1.6.4. 5.1.6.5	e e e e e e e e e e e e e e e e e e e	
1 1 0 7	Test requirement	128

5.2	Handover from E-UTRAN to other RATs	130
5.2.1	E-UTRAN FDD - UTRAN FDD handover	130
5.2.1.1	Test purpose	130
5.2.1.2	Test applicability	130
5.2.1.3	Minimum conformance requirements	
5.2.1.4	Test description	
5.2.1.4.1	Initial conditions	
5.2.1.4.2	Test procedure	
5.2.1.4.3	Message contents	
5.2.1.5	Test requirement	
5.2.2	E-UTRAN TDD - UTRAN FDD handover	
5.2.2.1	Test purpose	
5.2.2.2	Test applicability	
5.2.2.3	Minimum conformance requirements	
5.2.2.4	Test description	
5.2.2.4.1	Initial conditions	
5.2.2.4.2	Test procedure	
5.2.2.4.3	Message contents	
5.2.2.5	Test requirement	
5.2.3	E-UTRAN FDD - GSM handover	
5.2.3.1	Test purpose	
5.2.3.2	Test applicability	
5.2.3.3	Minimum conformance requirements	
5.2.3.4	Test description	
5.2.3.4.1	Initial conditions	
5.2.3.4.2	Test procedure	
5.2.3.4.2	Message contents	
5.2.3.4.5	Test requirement	
5.2.4	E-UTRAN TDD - UTRAN TDD handover	
5.2.4.1	Test purpose	
5.2.4.1	Test applicability	
5.2.4.2	Minimum conformance requirements	
5.2.4.3	Test description	
5.2.4.4.1	Initial conditions	
5.2.4.4.1	Test procedure	
5.2.4.4.2	Message contents	
5.2.4.5	Test requirement	
5.2.4.5 5.2.5	E-UTRAN FDD - UTRAN TDD handover	
5.2.5.1 5.2.5.2	Test purpose	
	Test applicability	
5.2.5.3	Minimum conformance requirements	
5.2.5.3.1	3.84Mcps TDD option	
5.2.5.3.2	1.28Mcps TDD option	
5.2.5.3.2	7.68 Mcps TDD option	
5.2.5.4	Test description	
5.2.5.4.1	3.84Mcps TDD option	
5.2.5.4.2	1.28Mcps TDD option	
5.2.5.4.3	7.68 Mcps TDD option	
5.2.5.5	Test requirement	
5.2.5.5.1	3.84Mcps TDD option	
5.2.5.5.2	1.28Mcps TDD option	
5.2.5.5.2	7.68 Mcps TDD option	
5.2.6	E-UTRA TDD - GSM handover	
5.2.6.1	Test purpose	
5.2.6.2	Test applicability	
5.2.6.3	Minimum conformance requirements	
5.2.6.4	Test description	
5.2.6.4.1	Initial conditions	
5.2.6.4.2	Test procedure	
5.2.6.4.3	Message contents	
5.2.6.5	Test requirement	
527	F-UTRAN FDD - UTRAN FDD handover: unknown target cell	160

5.2.7.1	Test purpose	169
5.2.7.2	Test applicability	169
5.2.7.3	Minimum conformance requirements	169
5.2.7.4	Test description	170
5.2.7.4.1	Initial conditions	170
5.2.7.4.2	Test procedure	170
5.2.7.4.3	Message contents	
5.2.7.5	Test requirement	
5.2.8	E-UTRAN FDD - GSM handover: unknown target cell	
5.2.8.1	Test purpose	
5.2.8.2	Test applicability	
5.2.8.3	Minimum conformance requirements	
5.2.8.4	Test description	
5.2.8.4.1	Initial conditions	
5.2.8.4.2	Test procedure	
5.2.8.4.3	Message contents	
5.2.8.5	Test requirement	
5.2.8.5 5.2.9	E-UTRAN TDD - GSM handover: unknown target cell	
5.2.9.1		
	Test purpose	
5.2.9.2	Test applicability	
5.2.9.3	Minimum conformance requirements	
5.2.9.4	Test description	
5.2.9.4.1	Initial conditions	
5.2.9.4.2	Test procedure	
5.2.9.4.3	Message contents	
5.2.9.5	Test requirement	
5.2.10	E-UTRAN TDD - UTRAN TDD handover: unknown target cell	
5.2.10.1	Test purpose	
5.2.10.2	Test applicability	
5.2.10.3	Minimum conformance requirements	
5.2.10.4	Test description	
5.2.10.4.1	Initial conditions	185
5.2.10.4.2	Test procedure	186
5.2.10.4.3	Message contents	187
5.2.10.5	Test requirement	188
	Handover from E-UTRAN to non-3GPP RATs	189
5.3.1	E-UTRAN FDD - HRPD handover	189
5.3.1.1	Test purpose	190
5.3.1.2	Test applicability	190
5.3.1.3	Minimum conformance requirements	
5.3.1.4	Test description	190
5.3.1.4.1	Initial conditions	
5.3.1.4.2	Test procedure	191
5.3.1.4.3	Message contents	192
5.3.1.5	Test requirement	
5.3.2	E-UTRAN FDD - cdma2000 1xRTT handover	
5.3.2.1	Test purpose	
5.3.2.2	Test applicability	
5.3.2.3	Minimum conformance requirements	
5.3.2.4	Test description	
5.3.2.4.1	Initial conditions	
5.3.2.4.2	Test procedure	
5.3.2.4.3	Message contents	
5.3.2.5	Test requirement	
5.3.3	E-UTRAN FDD - HRPD handover: unknown target cell	
5.3.3.1	Test purpose	
5.3.3.2	Test applicability	
5.3.3.2 5.3.3.3	Minimum conformance requirements	
5.3.3.4	<u>-</u>	
5.3.3.4 5.3.3.4.1	Test description	
5.3.3.4.2 5.3.3.4.3	Test procedure	
J.J.J.4.3	IVIESSAGE COMEMIS	/U ⁻

5.3.3.5	Test requirement	
5.3.4	E-UTRAN FDD - cdma2000 1xRTT handover: unknown target cell	
5.3.4.1	Test purpose	
5.3.4.2	Test applicability	
5.3.4.3	Minimum conformance requirements	
5.3.4.4	Test description	205
5.3.4.4.		205
5.3.4.4.		206
5.3.4.4.3	3 Message contents	207
5.3.4.5	Test requirement	207
6 I	RRC Connection Mobility Control	200
6.1 6.1.1	RRC Re-establishment	
6.1.1.1	E-UTRAN FDD Intra-frequency RRC Re-establishment	
6.1.1.2	Test emblishility	
6.1.1.3	Test applicability	
6.1.1.4	Minimum conformance requirements	
6.1.1.4 6.1.1.4.1	Test description	
6.1.1.4.		
6.1.1.4.	r	
	\boldsymbol{c}	
6.1.1.5 6.1.2	Test requirement	
6.1.2.1	Test purpose	
6.1.2.1		
6.1.2.3	Test applicability	
6.1.2.4	Minimum conformance requirements	
6.1.2.4	Test description	
6.1.2.4.		
6.1.2.4.3		
6.1.2.5	Test requirement	
6.1.3	E-UTRAN TDD Intra-frequency RRC Re-establishment	
6.1.3.1	Test purpose	
6.1.3.2	Test applicability	
6.1.3.3	Minimum conformance requirements	
6.1.3.4	Test description	
6.1.3.4.	<u>*</u>	
6.1.3.4.		
6.1.3.4.3	•	
6.1.3.5	Test requirement	220
6.1.4	E-UTRAN TDD Inter-frequency RRC Re-establishment	
6.1.4.1	Test purpose	
6.1.4.2	Test applicability	
6.1.4.3	Minimum conformance requirements	
6.1.4.4	Test description	
6.1.4.4.		
6.1.4.4.2		
6.1.4.4.3	*	
6.1.4.5	Test requirement	
6.2	Random Access	
6.2.1	E-UTRAN FDD - Contention Based Random Access Test	
6.2.1.1	Test purpose	
6.2.1.2	Test applicability	
6.2.1.3	Minimum conformance requirements	
6.2.1.4	Test description	
6.2.1.4.	•	
6.2.1.4.2		
6.2.1.4.3	•	
6.2.1.5	Test requirement	
6.2.2	E-UTRAN FDD - Non-Contention Based Random Access Test	
6.2.2.1	Test purpose	
6222	Test applicability	232

6.2.2.3	Minimum conformance requirements	232
6.2.2.4	Test description	233
6.2.2.4.1	Initial conditions	233
6.2.2.4.2	Test procedure	233
6.2.2.4.3	Message contents	
6.2.2.5	Test requirement	
6.2.3	E-UTRAN TDD - Contention Based Random Access Test	
6.2.3.1	Test purpose	
6.2.3.2	Test applicability	
6.2.3.3	Minimum conformance requirements	
6.2.3.4 6.2.3.4.1	Test description	
	Initial conditions	
6.2.3.4.2	Test procedure	
6.2.3.4.3	Message contents	
6.2.3.5	Test requirement	
6.2.4	E-UTRAN TDD - Non-Contention Based Random Access Test	
6.2.4.1	Test purpose	
6.2.4.2	Test applicability	
6.2.4.3	Minimum conformance requirements	
6.2.4.4	Test description	245
6.2.4.4.1	Initial conditions	
6.2.4.4.2	Test procedure	
6.2.4.4.3	Message contents	246
6.2.4.5	Test requirement	247
7 Tr:	(a) (a) (b) (b) (c) (c)	240
	iming and Signalling Characteristics	
7.1	UE Transmit Timing	
7.1.1	E-UTRAN FDD - UE Transmit Timing Accuracy	
7.1.1.1	Test purpose	
7.1.1.2	Test applicability	
7.1.1.3	Minimum conformance requirements	
7.1.1.4	Test description	
7.1.1.4.1	Initial conditions	
7.1.1.4.2	Test procedure	
7.1.1.4.3	Message contents	
7.1.1.5	Test requirement	
7.1.2	E-UTRAN TDD - UE Transmit Timing Accuracy	
7.1.2.1	Test purpose	
7.1.2.2	Test applicability	
7.1.2.3	Minimum conformance requirements	
7.1.2.4	Test description	257
7.1.2.4.1	Initial conditions	257
7.1.2.4.2	Test procedure	258
7.1.2.4.3	Message contents	258
7.1.2.5	Test requirement	260
7.2	UE Timing Advance	263
7.2.1	E-UTRAN FDD - UE Timing Advance Adjustment Accuracy	
7.2.1.1	Test purpose	
7.2.1.2	Test applicability	
7.2.1.3	Minimum conformance requirements	
7.2.1.4	Test description	
7.2.1.4.1	Initial conditions	
7.2.1.4.2	Test procedure	
7.2.1.4.3	Message contents	
7.2.1.5	Test requirement	
7.2.2	E-UTRAN TDD - UE Timing Advance Adjustment Accuracy	
7.2.2.1	Test purpose	
7.2.2.2	Test applicability	
7.2.2.3	Minimum conformance requirements	
7.2.2.3	Test description	
7.2.2.4	Initial conditions	
7.2.2.4.1	Test procedure	20d
4 /.	LUNE DEVICATION	209

7.2.2.4.3	Message contents	270
7.2.2.5	Test requirement	
7.3	Radio Link Monitoring	272
7.3.1	E-UTRAN FDD Radio Link Monitoring Test for Out-of-sync	272
7.3.1.1	Test purpose	272
7.3.1.2	Test applicability	272
7.3.1.3	Minimum conformance requirements	272
7.3.1.4	Test description	273
7.3.1.4.1	Initial conditions	273
7.3.1.4.2	Test procedure	275
7.3.1.4.3	Message contents	275
7.3.1.5	Test requirement	
7.3.2	E-UTRAN FDD Radio Link Monitoring Test for In-sync	278
7.3.2.1	Test purpose	
7.3.2.2	Test applicability	279
7.3.2.3	Minimum conformance requirements	279
7.3.2.4	Test description	279
7.3.2.4.1	Initial conditions	279
7.3.2.4.2	Test procedure	282
7.3.2.4.3	Message contents	
7.3.2.5	Test requirement	
7.3.3	E-UTRAN TDD Radio Link Monitoring Test for Out-of-sync	
7.3.3.1	Test purpose	284
7.3.3.2	Test applicability	285
7.3.3.3	Minimum conformance requirements	285
7.3.3.4	Test description	285
7.3.3.4.1	Initial conditions	285
7.3.3.4.2	Test procedure	287
7.3.3.4.3	Message contents	287
7.3.3.5	Test requirement	289
7.3.4	E-UTRAN TDD Radio Link Monitoring Test for In-sync	290
7.3.4.1	Test purpose	290
7.3.4.2	Test applicability	291
7.3.4.3	Minimum conformance requirements	
7.3.4.4	Test description	291
7.3.4.4.1	Initial conditions	
7.3.4.4.2	Test procedure	
7.3.4.4.3	Message contents	
7.3.4.5	Test requirement	
7.3.5	E-UTRAN FDD Radio Link Monitoring Test for Out-of-sync in DRX	
7.3.5.1	Test purpose	
7.3.5.2	Test applicability	
7.3.5.3	Minimum conformance requirements	
7.3.5.4	Test description	
7.3.5.4.1	Initial conditions	
7.3.5.4.2	Test procedure	
7.3.5.4.3	Message contents	
7.3.5.5	Test requirement	
7.3.6	E-UTRAN FDD Radio Link Monitoring Test for In-sync in DRX	
7.3.6.1	Test purpose	
7.3.6.2	Test applicability	
7.3.6.3	Minimum conformance requirements	
7.3.6.4	Test description	
7.3.6.4.1	Initial conditions	
7.3.6.4.2	Test procedure	
7.3.6.4.3	Message contents	
7.3.6.5	Test requirement	
7.3.7	E-UTRAN TDD Radio Link Monitoring Test for Out-of-sync in DRX	
7.3.7.1	Test purpose	
7.3.7.2	Test applicability	
7.3.7.3	Minimum conformance requirements	
7371	Test description	310

7.3.7.4.1	Initial conditions	311
7.3.7.4.2	Test procedure	312
7.3.7.4.3	Message contents	
7.3.7.5	Test requirement	
7.3.8	E-UTRAN TDD Radio Link Monitoring Test for In-sync in DRX	
7.3.8.1	Test purpose	
7.3.8.2	Test applicability	
7.3.8.3	Minimum conformance requirements	
7.3.8.4	Test description	
7.3.8.4.1	Initial conditions	
7.3.8.4.2	Test procedure	
7.3.8.4.3	Message contents	
7.3.8.5	Test requirement	
	E Measurements Procedures	
8.1	E-UTRAN FDD intra frequency measurements.	324
8.1.1	E-UTRAN FDD-FDD intra frequency event triggered reporting under fading propagation conditions	22.4
0.4.4.4	in asynchronous cells	
8.1.1.1	Test purpose	
8.1.1.2	Test applicability	
8.1.1.3	Minimum conformance requirements	
8.1.1.4	Test description	
8.1.1.4.1	Initial conditions	
8.1.1.4.2	Test procedure	
8.1.1.4.3	Message contents	
8.1.1.5	Test requirement	328
8.1.2	E-UTRAN FDD-FDD intra frequency event triggered reporting under fading propagation conditions	
	in synchronous cells	330
8.1.2.1	Test purpose	330
8.1.2.2	Test applicability	330
8.1.2.3	Minimum conformance requirements	
8.1.2.4	Test description	
8.1.2.4.1	Initial conditions	
8.1.2.4.2	Test procedure	
8.1.2.4.3	Message contents	
8.1.2.5	Test requirement	
8.1.3	E-UTRAN FDD-FDD intra frequency event triggered reporting under fading propagation conditions	
011.0	in synchronous cells with DRX	336
8.1.3.1	Test purpose	
8.1.3.2	Test applicability	336
8.1.3.3	Minimum conformance requirements	
8.1.3.4	Test description	
8.1.3.4.1	Initial conditions	
8.1.3.4.2	Test procedure	
8.1.3.4.3	Message contents	
8.1.3.5	Test requirement	
8.1.4	Void	
8.2	E-UTRAN TDD intra frequency measurements	343
8.2.1	E-UTRAN TDD-TDD intra-frequency event triggered reporting under fading propagation	
	conditions in synchronous cells	
8.2.1.1	Test purpose	343
8.2.1.2	Test applicability	343
8.2.1.3	Minimum conformance requirements	
8.2.1.4	Test description	344
8.2.1.4.1	Initial conditions	344
8.2.1.4.2	Test procedure	345
8.2.1.4.3	Message contents	
8.2.1.5	Test requirement	
8.2.2	E-UTRAN TDD-TDD intra-frequency event triggered reporting under fading propagation	
	conditions in synchronous cells with DRX	348
8.2.2.1	Test purpose	
8 2 2 2	Test applicability	348

8.2.2.3	Minimum conformance requirements	348
8.2.2.4	Test description	
8.2.2.4.1	Initial conditions	350
8.2.2.4.2	Test procedure	351
8.2.2.4.3	Message contents	351
8.2.2.5	Test requirement	354
8.3	E-UTRAN FDD-FDD Inter-frequency Measurements	356
8.3.1	E-UTRAN FDD-FDD Inter-frequency event triggered reporting under fading propagation	
	conditions in asynchronous cells	356
8.3.1.1	Test purpose	356
8.3.1.2	Test applicability	356
8.3.1.3	Minimum conformance requirements	356
8.3.1.4	Test description	357
8.3.1.4.1	Initial conditions	
8.3.1.4.2	Test procedure	
8.3.1.4.3	Message contents	
8.3.1.5	Test requirement	361
8.3.2	E-UTRAN FDD-FDD Inter-frequency event triggered reporting when DRX is used under fading	
	propagation conditions in asynchronous cells	
8.3.2.1	Test purpose	
8.3.2.2	Test applicability	
8.3.2.3	Minimum conformance requirements	
8.3.2.4	Test description	
8.3.2.4.1	Initial conditions	
8.3.2.4.2	Test procedure	
8.3.2.4.3	Message contents	
8.3.2.5	Test requirement	369
8.3.3	E-UTRAN FDD-FDD Inter frequency event triggered reporting under AWGN propagation	
	conditions in asynchronous cells with DRX when L3 filtering is used	
8.3.3.1	Test purpose	
8.3.3.2	Test applicability	
8.3.3.3	Minimum conformance requirements	
8.3.3.4	Test description	
8.3.3.4.1	Initial conditions	
8.3.3.4.2	Test procedure	
8.3.3.4.3	Message contents	
8.3.3.5	Test requirement	
8.4	E-UTRAN TDD-TDD inter frequency measurements	3/8
8.4.1	E-UTRAN TDD-TDD Inter-frequency event triggered reporting under fading propagation	276
0 1 1 1	conditions in synchronous cells	
8.4.1.1	Test purpose	
8.4.1.2 8.4.1.3	Test applicability	
8.4.1.4	Test description	
8.4.1.4.1		
8.4.1.4.1	Initial conditions	
8.4.1.4.3	Message contents	
8.4.1.5	Test requirement	
8.4.2	E-UTRAN TDD-TDD Inter-frequency event triggered reporting when DRX is used under fading	302
0.4.2	propagation conditions in synchronous cells	384
8.4.2.1	Test purpose	
8.4.2.2	Test applicability	
8.4.2.3	Minimum conformance requirements	
8.4.2.4	Test description	
8.4.2.4.1	Initial conditions	
8.4.2.4.2	Test procedure	
8.4.2.4.3	Message contents	
8.4.2.5	Test requirement	
8.4.3	E-UTRAN TDD-TDD inter-frequency event triggered reporting under AWGN propagation	
	conditions in synchronous cells with DRX when L3 filtering is used	392
8.4.3.1	Test purpose	
8/132	Test applicability	300

8.4.3.3	Minimum conformance requirements	392
8.4.3.4	Test description	
8.4.3.4.1	Initial conditions	
8.4.3.4.2	Test procedure	
8.4.3.4.3		
	Message contents	
8.4.3.5	Test requirement	
8.5	E-UTRAN FDD - UTRAN measurements	
8.5.1	E-UTRAN FDD - UTRAN FDD event triggered reporting under fading propagation conditions	
8.5.1.1	Test purpose	
8.5.1.2	Test applicability	
8.5.1.3	Minimum conformance requirements	
8.5.1.4	Test description	403
8.5.1.4.1	Initial conditions	403
8.5.1.4.2	Test procedure	404
8.5.1.4.3	Message contents	405
8.5.1.5	Test requirement	
8.5.2	E-UTRAN FDD - UTRAN FDD SON ANR cell search reporting under AWGN propagation	
	conditions.	408
8.5.2.1	Test purpose	
8.5.2.2	Test applicability	
8.5.2.3	Minimum conformance requirements	
8.5.2.4	Test description	
8.5.2.4.1	Initial conditions	
8.5.2.4.2	Test procedure	
8.5.2.4.3	Message contents	
8.5.2.5	Test requirement	413
8.5.3	E-UTRAN FDD - UTRAN FDD event triggered reporting when DRX is used under fading	
	propagation conditions	
8.5.3.1	Test purpose	414
8.5.3.2	Test applicability	414
8.5.3.3	Minimum conformance requirements	415
8.5.3.4	Test description	416
8.5.3.4.1	Initial conditions	
8.5.3.4.2	Test procedure	
8.5.3.4.3	Message contents	
8.5.3.5	Test requirement	
8.6	E-UTRAN TDD - UTRAN FDD measurements	
8.6.1	E-UTRAN TDD - UTRAN FDD event triggered reporting under fading propagation conditions	
8.6.1.1	Test purpose	
8.6.1.2	Test applicability	
8.6.1.3	Minimum conformance requirements	
8.6.1.4	Test description	
8.6.1.4.1	Initial conditions	
8.6.1.4.2	Test procedure	
8.6.1.4.3	Message contents	
8.6.1.5	Test requirement	
8.7	E-UTRAN TDD - UTRAN measurements	
8.7.1	E-UTRAN TDD - UTRAN TDD event triggered reporting under fading propagation conditions	430
8.7.1.1	Test purpose	430
8.7.1.2	Test applicability	430
8.7.1.3	Minimum conformance requirements	430
8.7.1.4	Test description	
8.7.1.4.1	Initial conditions	
8.7.1.4.2	Test procedure	
8.7.1.4.3	Message contents	
8.7.1.5	Test requirement	
8.7.1.3	E-UTRAN TDD - UTRAN TDD cell search when DRX is used under fading propagation condition	
8.7.2.1	Test purpose	
8.7.2.2	Test applicability	
8.7.2.3	Minimum conformance requirements	
8.7.2.4 8.7.2.4.1	Test description	438 138
x / //II	Initial Conditions	/1 4 5

8.7.2.4.2	Test procedure	439
8.7.2.4.3	Message contents	
8.7.2.5	Test requirement	443
8.7.3	E-UTRAN TDD - UTRAN TDD SON ANR cell search reporting under AWGN propagation	
	conditions	446
8.7.3.1	Test purpose	446
8.7.3.2	Test applicability	446
8.7.3.3	Minimum conformance requirements	
8.7.3.4	Test description	447
8.7.3.4.1	Initial conditions	447
8.7.3.4.2	Test procedure	
8.7.3.4.3	Message contents	
8.7.3.5	Test requirement	
8.8	E-UTRAN FDD - GSM measurements	
8.8.1	E-UTRAN FDD - GSM event triggered reporting in AWGN	
8.8.1.1	Test purpose	
8.8.1.2	Test applicability	
8.8.1.3	Minimum conformance requirements	
8.8.1.4	Test description	
8.8.1.4.1	Initial conditions	
8.8.1.4.2	Test procedure	
8.8.1.4.3	Message contents	
8.8.1.5	Test requirement	
8.8.2 8.8.2.1	E-UTRAN FDD - GSM event triggered reporting when DRX is used in AWGN	
8.8.2.2	Test purpose Test applicability	
8.8.2.3	Minimum conformance requirements	
8.8.2.4	Test description	
8.8.2.4.1	Initial conditions	
8.8.2.4.2	Test procedure	
8.8.2.4.3	Message contents	
8.8.2.5	Test requirement	
8.9	E-UTRAN FDD - UTRAN TDD measurements	
8.9.1	E-UTRAN FDD - UTRAN TDD event triggered reporting under fading propagation conditions	
8.9.1.1	Test purpose	
8.9.1.2	Test applicability	467
8.9.1.3	Minimum requirement	467
8.9.1.4	Test description	
8.9.1.4.1	Initial conditions	
8.9.1.4.2	Test procedure	
8.9.1.4.3	Message contents	
8.9.1.5	Test requirement	
8.10	E-UTRAN TDD - GSM measurements	
8.10.1	E-UTRAN TDD - GSM event triggered reporting in AWGN	
8.10.1.1	Test purpose	
8.10.1.2	Test applicability	
8.10.1.3	Minimum conformance requirements	
8.10.1.4	Test description	
8.10.1.4.1 8.10.1.4.2	Initial conditions	
8.10.1.4.2	1	
8.10.1.5	Test requirement	
8.10.1.3	E-UTRAN TDD-GSM event triggered reporting when DRX is used in AWGN	
8.10.2.1	Test purpose	
8.10.2.2	Test applicability	
8.10.2.3	Minimum conformance requirements	
8.10.2.4	Test description	
8.10.2.4.1	Initial conditions	
8.10.2.4.2		484
8.10.2.4.3		
8.10.2.5	Test requirement	
Q 11	Monitoring of Multiple Layers	490

8.11.1	Multiple E-UTRAN FDD-FDD Inter-frequency event triggered reporting under fading propagation	
0.11.1	conditions	
8.11.1.	T T	
8.11.1.	TI	
8.11.1.	- 1 · · · · · · · · · · · · · · · · · ·	
8.11.1.	r	
8.11.1.		
8.11.1.	- I	
8.11.1.		
8.11.1.	1 1	497
8.11.2	E-UTRAN TDD - E-UTRAN TDD and E-UTRAN TDD Inter-frequency event triggered reporting	400
0.11.0	under fading propagation conditions	
8.11.2.		
8.11.2.	TI	
8.11.2.	- 1 · · · · · · · · · · · · · · · · · ·	
8.11.2.	F	
8.11.2.		
8.11.2.	1	
8.11.2.		
8.11.2.	- 1 · · · · 1	503
8.11.3	E-UTRAN FDD-FDD Inter-frequency and UTRAN FDD event triggered reporting under fading	
	propagation conditions	
8.11.3	T T	
8.11.3.	11 3	
8.11.3.	1	
8.11.3.	1	
8.11.3.		
8.11.3.		
8.11.3.	4.3 Message contents	509
8.11.3.	- · · · 1	
8.11.4	InterRAT E-UTRA TDD to E-UTRA TDD and UTRA TDD cell search	
8.11.4	1 1	
8.11.4.	2 Test applicability	515
8.11.4.	3 Minimum conformance requirements	515
8.11.4.	4 Test description	518
8.11.4.		
8.11.4.	1	
8.11.4.	ϵ	
8.11.4.	1	523
8.11.5	Combined E-UTRAN FDD - E-UTRA FDD and GSM cell search. E-UTRA cells in fading; GSM	
	cell in static propagation conditions.	525
8.11.5	1 Test purpose	526
8.11.5.	2 Test applicability	526
8.11.5.	3 Minimum conformance requirements	526
8.11.5.	4 Test description	529
8.11.5.	4.1 Initial conditions	529
8.11.5.	4.2 Test procedure	530
8.11.5.	4.3 Message contents	531
8.11.5.	5 Test requirement	531
8.11.6	Combined E-UTRAN TDD - E-UTRA TDD and GSM cell search. E-UTRA cells in fading; GSM	
	cell in static propagation conditions	533
8.11.6		
8.11.6.	• •	
8.11.6.		
8.11.6.	•	
8.11.6.	•	
8.11.6		
8.11.6.	•	
8.11.6.	5 Test requirement	538
9	Measurement Performance Requirements	510
-	<u>*</u>	
9.1	RSRP	34 J

9.1.1	FDD Intra frequency RSRP Accuracy	541
9.1.1.1	FDD Intra Frequency Absolute RSRP Accuracy	541
9.1.1.1.1	Test purpose	541
9.1.1.1.2	Test applicability	541
9.1.1.1.3	Minimum conformance requirements	541
9.1.1.1.4	Test description	542
9.1.1.1.4.1	Initial conditions	542
9.1.1.1.4.2	Test procedure	542
9.1.1.1.4.3	Message contents	542
9.1.1.1.5	Test requirement	543
9.1.1.2	FDD Intra Frequency Relative Accuracy of RSRP	545
9.1.1.2.1	Test purpose	545
9.1.1.2.2	Test applicability	545
9.1.1.2.3	Minimum conformance requirements	545
9.1.1.2.4	Test description	546
9.1.1.2.4.1	Initial conditions	546
9.1.1.2.4.2	Test procedure	546
9.1.1.2.4.3	Message contents	547
9.1.1.2.5	Test requirement	547
9.1.2	TDD Intra frequency RSRP Accuracy	
9.1.2.1	TDD Intra Frequency Absolute RSRP Accuracy	
9.1.2.1.1	Test purpose	550
9.1.2.1.2	Test applicability	550
9.1.2.1.3	Minimum conformance requirements	550
9.1.2.1.4	Test description	
9.1.2.1.4.1	Initial conditions	551
9.1.2.1.4.2	Test procedure	551
9.1.2.1.5	Test requirement	
9.1.2.2	TDD Intra Frequency Relative Accuracy of RSRP	
9.1.2.2.1	Test purpose	
9.1.2.2.2	Test applicability	
9.1.2.2.3	Minimum conformance requirements	
9.1.2.2.4	Test description	
9.1.2.2.4.1	Initial conditions	
9.1.2.2.4.2	Test procedure	
9.1.2.2.4.3	Message contents	
9.1.2.2.5	Test requirement	
9.1.3	FDD Inter frequency RSRP Accuracy	
9.1.3.1	FDD - FDD Inter Frequency Absolute RSRP Accuracy	
9.1.3.1.1	Test purpose	
9.1.3.1.2	Test applicability	
9.1.3.1.3	Minimum conformance requirements	
9.1.3.1.4	Test description	
9.1.3.1.4.1	Initial conditions	
9.1.3.1.4.2	Test procedure	
9.1.3.1.4.3	Message contents	
9.1.3.1.5	Test requirement	
9.1.3.2	FDD - FDD Inter Frequency Relative Accuracy of RSRP	
9.1.3.2.1	Test purpose	
9.1.3.2.2	Test applicability	
9.1.3.2.3	Minimum conformance requirements	
9.1.3.2.4	Test description	
9.1.3.2.4.1	Initial conditions	
9.1.3.2.4.2 9.1.3.2.4.3	Test procedure	
	Message contents	
9.1.3.2.5	Test requirement	
9.1.4	TDD Inter frequency RSRP Accuracy	
9.1.4.1	TDD - TDD Inter Frequency Absolute RSRP Accuracy	
9.1.4.1.1	Test purpose	
9.1.4.1.2 9.1.4.1.3	Test applicability	
9.1.4.1.3	Minimum conformance requirements	

9.1.4.1.4.1	Initial conditions	
9.1.4.1.4.2	Test procedure	
9.1.4.1.4.3	Message contents	
9.1.4.1.5	Test requirement	
9.1.4.2	TDD - TDD Inter Frequency Relative Accuracy of RSRP	
9.1.4.2.1	Test purpose	
9.1.4.2.2	Test applicability	
9.1.4.2.3	Minimum conformance requirements	
9.1.4.2.4	Test description	
9.1.4.2.4.1	Initial conditions	
9.1.4.2.4.2	Test procedure	
9.1.4.2.4.3	Message contents	
9.1.4.2.5	Test requirement	
	SRQ	
9.2.1	FDD Intra frequency RSRQ Accuracy	
9.2.1.1	FDD Intra Frequency Absolute RSRQ Accuracy	
9.2.1.1.1	Test purpose	
9.2.1.1.2	Test applicability	
9.2.1.1.3 9.2.1.1.4	Minimum conformance requirements	
9.2.1.1.4	Test description	
9.2.1.1.4.1	Initial conditions	
9.2.1.1.4.2	•	
9.2.1.1.3	Test requirement	
9.2.2.1	TDD Intra Frequency Absolute RSRQ Accuracy	
9.2.2.1.1	Test purpose	
9.2.2.1.1	Test applicability	
9.2.2.1.3	Minimum conformance requirements	
9.2.2.1.4	Test description	
9.2.2.1.4.1	Initial conditions	
9.2.2.1.4.2	Test procedure	
9.2.2.1.4.3	Message contents	
9.2.2.1.5	Test requirement	
9.2.3	FDD - FDD Inter frequency RSRQ Accuracy	
9.2.3.1	FDD - FDD Inter Frequency Absolute RSRQ Accuracy	
9.2.3.1.1	Test purpose	
9.2.3.1.2	Test applicability	
9.2.3.1.3	Minimum conformance requirements	
9.2.3.1.4	Test description	586
9.2.3.1.4.1	Initial conditions	586
9.2.3.1.4.2	Test procedure	586
9.2.3.1.4.3	Message contents	587
9.2.3.1.5	Test requirement	
9.2.3.2	FDD - FDD Inter Frequency Relative Accuracy of RSRQ	590
9.2.3.2.1	Test purpose	
9.2.3.2.2	Test applicability	
9.2.3.2.3	Minimum conformance requirements	
9.2.3.2.4	Test description	
9.2.3.2.4.1	Initial conditions	
9.2.3.2.4.2	Test procedure	
9.2.3.2.4.3	Message contents	
9.2.3.2.5	Test requirement	
9.2.4	TDD - TDD Inter frequency RSRQ Accuracy	
9.2.4.1	TDD - TDD Inter Frequency Absolute RSRQ Accuracy	
9.2.4.1.1 9.2.4.1.2	Test applieshility	
9.2.4.1.2 9.2.4.1.3	Test applicability	
9.2.4.1.3	Minimum conformance requirements	
9.2.4.1.4	Initial conditions	
9.2.4.1.4.1	Test procedure	
9.2.4.1.4.2	Message contents	
9.2.4.1.5	Test requirement	
,,_, T.1.J	100t requirement	

9.2.4.2	TDD - TDD Inter Frequency Relative Accuracy of RSRQ	599
9.2.4.2.1	Test purpose	599
9.2.4.2.2	Test applicability	
9.2.4.2.3	Minimum conformance requirements	599
9.2.4.2.4	Test description	600
9.2.4.2.4.1	Initial conditions	600
9.2.4.2.4.2	Test procedure	600
9.2.4.2.4.3	Message contents	601
9.2.4.2.5	Test requirement	
9.3	UTRA FDD CPICH RSCP	603
9.3.1	E-UTRAN FDD - UTRA FDD CPICH RSCP absolute accuracy	603
9.3.1.1	Test purpose	603
9.3.1.2	Test applicability	
9.3.1.3	Minimum conformance requirements	
9.3.1.4	Test description	
9.3.1.4.1	Initial conditions	
9.3.1.4.2	Test procedure	
9.3.1.4.3	Message contents	
9.3.1.5	Test requirement	
9.3.2	E-UTRAN TDD - UTRA FDD CPICH RSCP absolute accuracy	
9.3.2.1	Test purpose	
9.3.2.2	Test applicability	
9.3.2.3	Minimum conformance requirements	
9.3.2.4	Test description	
9.3.2.4.1	Initial conditions	
9.3.2.4.2	Test procedure	
9.3.2.4.3	Message contents	
	st requirement	
9.4	UTRAN FDD CPICH Ec/No	
9.4.1	E-UTRAN FDD - UTRA FDD CPICH Ec/No absolute accuracy	
9.4.1.1	Test purpose	
9.4.1.2	Test applicability	
9.4.1.3	Minimum conformance requirements	
9.4.1.4	Test description	
9.4.1.4.1	Initial conditions	
9.4.1.4.2	Test procedure	
9.4.1.4.3	Message contents	
9.4.1.5	Test requirement	
9.4.2	E-UTRAN TDD - UTRA FDD CPICH Ec/No absolute accuracy	
9.4.2.1	Test purpose	
9.4.2.2	Test applicability	
9.4.2.3	Minimum conformance requirements	
9.4.2.4	Test description	
9.4.2.4.1	Initial conditions	
9.4.2.4.2	Test procedure	
9.4.2.4.3	Message contents	
9.4.2.5	Test requirement	
9.5	Void	
9.6	GSM carrier RSSI	
9.6.1	GSM RSSI absolute accuracy for E-UTRAN FDD	
9.6.2	GSM RSSI absolute accuracy for E-UTRAN TDD	
9.6.2.1	Test purpose	
9.6.2.2	Test applicability	
9.6.2.3	Minimum conformance requirements	
9.6.2.4	Test description	
9.6.2.4.1	Initial conditions	
9.6.2.4.2	Test procedure	
9.6.2.4.3	Message contents.	
9.6.2.5	Test requirement	
		
Annex A	(normative): Measurement Channels	633

A.1 A.1.1 A.1.2	FDD		633
A.2	PCFICH/PDCCH/PH	ICH	635
A.2.1			
A.2.2			
A.3	PUSCH		635
Anne	ex B (normative):	Propagation Conditions	637
B.0	No interference		637
B.1	Static propagation con	ndition	637
B.2	Multi-path fading Pro	pagation Conditions	637
Anne	ex C (normative):	Downlink Physical Channels	638
C.0	Downlink signal		638
C.1	General		638
C.2	Set-up		638
Anne	ex D (normative):	OFDMA Channel Noise Generator (OCNG)	639
D.1	OCNG Patterns for F	DD	639
D.1.1		1: outer resource blocks allocation in 10 MHz	
D.1.2		2: full bandwidth allocation in 10 MHz	
D.1.3		3: outer resource blocks allocation in 1.4 MHz	
D.1.4		4: full bandwidth allocation in 1.4 MHz	
D.1.5 D.1.6		5: outer resource blocks allocation in 10 MHz (without MBSFN)	
D.1.0 D.1.7		7: full bandwidth allocation in 1.4 MHz (without MBSFN)	
D.2	_	DD	
D.2.1		1: outer resource blocks allocation in 10 MHz	
D.2.1 D.2.2		2: full bandwidth allocation in 10 MHz	
D.2.3		3: outer resource blocks allocation in 1.4 MHz	
D.2.4		4: full bandwidth allocation in 1.4 MHz	
Anne	ex E (normative):	Cell configuration mapping	648
Anne	ex F:	Measurement uncertainties and Test Tolerances	653
F.1	Acceptable uncertaint	ty of Test System (normative)	653
F.1.1		environments	
F.1.2	Measurement of RR	M requirements	654
F.2	Interpretation of meas	surement results (normative)	662
F.3		erivation of Test Requirements (informative)	
F.3.1 F.3.2		environments	
Anne	ex G (normative):	Statistical Testing	678
G.1	· · · · · · · · · · · · · · · · · · ·		
G.2	Statistical testing of d	elay and UE measurement performance in RRM tests	678
G.2.1			
G.2.2			
G.2.3		of the pass fail limits	
G.2.4		les	
G.2.5		1-1	
G.2.6	i est conditions for c	lelay tests and UE measurement performance	680

G.X	Theory to derive the	numbers in Table G.2.3-1 (Informative)	680
Anne	ex H (normative):	Default Message Contents	681
H.1	Common contents o	f system information messages exceptions	681
H.2 H.2.1 H.2.2 H.2.3 H.2.4 H.2.5	System informatio System informatio System informatio System informatio	f system information blocks exceptions	ion681 ion682 683)687
H.3 H.3.1		ges and information elements contents exceptions	688
H.3.2	configuration RRC messages and	d information elements contents exceptions for E-UTRAN cell re-selection and	
H.3.3		l information elements contents exceptions for E-UTRAN inter-RAT handover	
H.3.4		d information elements exceptions for E-UTRAN UE transmit timing accuracy and adjustment accuracy	
H.3.5	RRC messages and	d information elements contents exceptions for E-UTRAN RSRP and RSRQ	
H.3.6	RRC messages and	d information elements contents exceptions for E-UTRAN inter frequency handover frequency cell search	er
H.3.7	RRC messages and	I information elements contents exceptions for E-UTRAN inter frequency and E-Γ cell search when DRX is used	
Anne	x I: Change h	istory	705
Histo			

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

Introduction

The present document is part 3 of a multi-parts TS:

3GPP TS 36.521-1 [10]: Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) conformance specification Radio transmission and reception; Part 1: Conformance Testing.

3GPP TS 36.521-2 [23]: Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) conformance specification Radio transmission and reception; Part 2: Implementation Conformance Statement (ICS).

3GPP TS 36.521-3: Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) conformance specification Radio transmission and reception; Part 3: Radio Resource Management (RRM) conformance testing.

1 Scope

The present document specifies the measurement procedures for the conformance test of the user equipment (UE) that contain requirements for support of RRM (Radio Resource Management) as part of the 3G Long Term Evolution (3G LTE).

The requirements are listed in different clauses only if the corresponding parameters deviate. More generally, tests are only applicable to those mobiles that are intended to support the appropriate functionality. To indicate the circumstances in which tests apply, this is noted in the "test applicability" part of the test.

For example only Release 8 and later UE declared to support LTE shall be tested for this functionality. In the event that for some tests different conditions apply for different releases, this is indicated within the text of the test itself.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

[1]	3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
[2]	3GPP TS 36.101: "E-UTRA UE radio transmission and reception".
[3]	ITU-R Recommendation SM.329-10, "Unwanted emissions in the spurious domain".
[4]	3GPP TS 36.133: "E-UTRA requirements for support of radio resource management".
[5]	3GPP TS 36.331: "E-UTRA Radio Resource Control (RRC): protocol specification".
[6]	3GPP TS 36.304: "E-UTRA UE procedures in idle mode".
[7]	3GPP TS 36.508: "Common test environments for User Equipment (UE)".
[8]	3GPP TS 36.213: "E-UTRA Physical layer procedures".
[9]	3GPP TS 36.211: "E-UTRA Physical Channels and Modulation".
[10]	3GPP TS 36.521-1: "User Equipment (UE) conformance specification Radio transmission and reception. Part 1: Conformance Testing".
[11]	3GPP TS 36.321: "E-UTRA Medium Access Control (MAC): protocol specification".
[12]	3GPP TS 36.214: "E-UTRA Physical layer - Measurements".
[13]	3GPP TS 45.010: "Radio subsystem synchronization".
[14]	3GPP TS 36.306: "E-UTRA UE radio access capabilities".
[15]	3GPP TS 45.008: "Radio subsystem link control".
[16]	3GPP TS 45.005: "Radio transmission and reception"
[17]	3GPP2 C.S0033-B: "Recommended Minimum Performance Standards for cdma2000 High Rate Packet Data Access Terminal".

[18]	3GPP2 C.S0024-B: "cdma2000 High Rate Packet Data Air Interface Specification".
[19]	3GPP2 C.S0011-C: "Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Mobile Stations"
[20]	3GPP TR 36.903: "Derivation of test tolerances for Radio Resource Management (RRM) conformance tests ".
[21]	3GPP TS 25.133: "Requirements for Support of Radio Resource Management (FDD)".
[22]	3GPP TS 25.123: "Requirements for Support of Radio Resource Management (TDD)".
[23]	3GPP TS 36.521-2: "Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) conformance specification; Radio transmission and reception; Part 2: Implementation Conformance Statement (ICS)".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in TR 21.905 [1].

Channel edge: The lowest and highest frequency of the carrier, separated by the channel bandwidth.

Channel bandwidth: The RF bandwidth supporting a single E-UTRA RF carrier with the transmission bandwidth configured in the uplink or downlink of a cell. The channel bandwidth is measured in MHz and is used as a reference for transmitter and receiver RF requirements.

Maximum throughput: The maximum achievable throughput for a reference measurement channel.

Maximum Output Power: The mean power level per carrier of UE measured at the antenna connector in a specified reference condition.

Mean power: When applied to E-UTRA transmission this is the power measured in the operating system bandwidth of the carrier. The period of measurement shall be at least one subframe (1ms) unless otherwise stated.

Occupied bandwidth: The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage $\beta/2$ of the total mean power of a given emission.

Output power: The mean power of one carrier of the UE, delivered to a load with resistance equal to the nominal load impedance of the transmitter.

Throughput: The number of payload bits successfully received per second for a reference measurement channel in a specified reference condition.

Transmission bandwidth: Bandwidth of an instantaneous transmission from a UE or BS, measured in Resource Block units.

Transmission bandwidth configuration: The highest transmission bandwidth allowed for uplink or downlink in a given channel bandwidth, measured in Resource Block units.

3.2 Symbols

For the purposes of the present document, the following symbols apply:

BW_{Channel} Channel bandwidth, defined in TS 36.101 subclause 3.2

CPICH_Ec Average energy per PN chip for the CPICH

CPICH_Ec/Io The ratio of the received energy per PN chip for the CPICH to the total received power

spectral density at the UE antenna connector.

Ec Average energy per PN chip

Ês Received energy per RE (power normalized to the subcarrier spacing) during the useful

part of the symbol, i.e. excluding the cyclic prefix, at the UE antenna connector

Io The total received power density, including signal and interference, as measured at the

UE antenna connector.

Ioc The power spectral density (integrated in a noise bandwidth equal to the chip rate and

normalized to the chip rate) of a band limited noise source (simulating interference from

cells, which are not defined in a test procedure) as measured at the UE antenna

connector.

Iot The received power spectral density of the total noise and interference for a certain RE

(power integrated over the RE and normalized to the subcarrier spacing) as measured at

the UE antenna connector

 $N_{\rm oc}$ The power spectral density of a white noise source (average power per RE normalised

to the subcarrier spacing), simulating interference from cells that are not defined in a

test procedure, as measured at the UE antenna connector

 n_{PRB} Physical Resource Block number as defined in subclause 3.1 in 3GPP TS 36.211. P_{CMAX} Configured UE transmitted power as defined in subclause 6.2.5 in 3GPP TS 36.101.

S Defined in TS 36.304, subclause 5.2.3.2 for E-UTRAN

SCH_Ec/Ior The ratio of the transmit energy per PN chip of the SCH to the total transmit power

spectral density at the UTRA Node B antenna connector

SCH_RP Received (linear) average power of the resource elements that carry E-UTRA

synchronisation signal, measured at the UE antenna connector

S_{ServingCcell} Defined in TS 36.304

Sintersearch Defined in TS 25.304, subclause 5.2.6.1.5

Sintrasearch Defined in TS 25.304, subclause 5.2.6.1.5 for UTRAN and in TS 36.304, subclause

5.2.4.7 for E-UTRAN

T_{RE-ESTABLISH-REQ} The RRC Re-establishment delay requirement, the time between the moment when

erroneous CRCs are applied, to when the UE starts to send preambles on the PRACH.

 $\begin{array}{lll} Treselection & Defined in TS 25.304, subclause 5.2.6.1.5 \\ Treselection_{RAT} & Defined in TS 36.304, subclause 5.2.4.7 \\ Treselection_{EUTRAN} & Defined in TS 36.304, subclause 5.2.4.7 \\ Treselection_{UTRAN} & Defined in TS 36.304, subclause 5.2.4.7 \\ Treselection_{GERAN} & Defined in TS 36.304, subclause 5.2.4.7 \\ T_S & Basic time unit, defined in TS 36.211, clause 4 \\ \end{array}$

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [1].

1x RTT CDMA2000 1x Radio Transmission Technology

ARQ Automatic Repeat Request
AWGN Additive White Gaussian Noise
BCCH Broadcast Control Channel
BCH Broadcast Channel

BS Base Station

BSIC Base transceiver Station Identity Code
CCCH SDU Common Control Channel SDU
CCTrCH Coded Composite Transport Channel

CFN Connection Frame Number CPICH Common Pilot Channel

CPICH Ec/No CPICH received energy per chip divided by the power density in the band

C-RNTI Cell RNTI

CQI Channel Quality Indicator

DL Downlink

DCCH Dedicated Control Channel
DPCH Dedicated Physical Channel

DPCCH Dedicated Physical Control Channel

DRX Discontinuous Reception
DTX Discontinuous Transmission

EARFCN E-UTRA Absolute Radio Frequency Channel Number

EPRE Energy Per Resource Element

E-UTRA Evolved UMTS Terrestrial Radio Access

E-UTRAN Evolved UMTS Terrestrial Radio Access Network

FDD Frequency Division Duplex FRC Fixed Reference Channel

GSM Global System for Mobile communication

HARQ Hybrid Automatic Repeat Request

HO Handover

HRPD High Rate Packet Data MAC Medium Access Control

OCNG OFDMA Channel Noise Generator

OFDM Orthogonal Frequency Division Multiplexing
OFDMA Orthogonal Frequency Division Multiple Access

PBCH Physical Broadcast Channel
PCCH Paging Control Channel

P-CCPCH Primary Common Control Physical Channel
PCFICH Physical Control Format Indicator Channel
PDCCH Physical Downlink Control Channel
PDSCH Physical Downlink Shared Channel

PHICH Physical Hybrid ARQ Indictor Channel
PLMN Public Land Mobile Network

PMI Precoding Matrix Indicator
PRACH Physical Random Access Channel
PUCCH Physical Uplink Control Channel
PUSCH Physical Uplink Shared Channel
RACH Random Access Channel
RAT Radio Access Channel

REFSENS Reference Sensitivity power level

r.m.s Root Mean Square RNC Radio Network Controller

RNTI Radio Network Temporary Identifier

RRC Radio Resource Control
RRM Radio Resource Management
RSRP Reference Signal Received Power
RSRQ Reference Signal Received Quality
RSSI Received Signal Strength Indicator

SCH Synchronization Channel Service Data Unit **SDU** SFN System Frame Number Signal-to-Noise Ratio **SNR** SON Self Organizing Network Sounding Reference Signal SRS Time Division Duplex **TDD** TTI Transmission Time Interval

UE User Equipment

UL Uplink

UMTS Universal Mobile Telecommunications System

UTRA UMTS Terrestrial Radio Access

UTRAN UMTS Terrestrial Radio Access Network

3A Requirements for support of RRM

3A.1 General

Radio Resource Management (RRM) ensures the efficient use of the available radio resources and also provides mechanisms that enable E-UTRAN to meet radio resource related requirements. The requirements that are tested include:

- Idle mode, the cell re-selection algorithms that are controlled by the setting of parameters (thresholds and hysteresis values) that define the best cell and/or determine when the UE should select a new cell
- The configuration of the UE measurement and reporting procedures that are transmitted via dedicated signalling in connected mode
- Connected mode, the mobility of radio connections that has to be supported
- Handover decisions that may be based on UE or eNB measurements
- Inter-RAT RRM, the management of radio resources in connection with inter-RAT mobility, e.g. Inter-RAT handover

Inter frequency and inter-RAT test cases are performed without frequency overlapping between cells required in the test. For bands with bandwidth not accommodating all the cells required in the test without frequency overlapping, inter band testing shall be done according subclause 3A.3.5. If the UE does not support the combination given in subclause 3A.3.5, the relevant tests are applicable only to the bands with the necessary bandwidth.

For test cases in clauses 4, 5, 6, 7, 8, 9 the initial conditions of the downlink physical channels signal levels and downlink physical channels required are specified in Annex C.0.

Unless otherwise mentioned, in those test case where delay is the test criteria, if HARQ or even RLC retransmission happens and is detected by SS, the extra delay due to retransmission shall be excluded in the delay calculation before making a pass or fail judgement on the UE in the test.

3A.2 Requirements Classification for Statistical Testing

The test requirements are expressed as absolute requirements with a single value stating the requirement or expressed as a success rate. The statistical nature depends on the type of test requirement. Some have large statistical variations, while others are not statistical in nature at all. When testing a parameter with a statistical nature, a confidence level is set. This establishes the probability that a Device Under Test (DUT) passing the test actually meets the test requirement and determines how many times a test have to be repeated and what the pass and fail criteria is. The statistical significance shall be set according to Annex G.

3A.3 RRM Test Configurations

The cell configuration of cells described in the test cases shall be set according to TS 36.508 [7] section 4.4.7.

3A.3.1 UE with Single or Multiple Antenna Connector

For testing a UE with more than one E-UTRA antenna connector, the connection diagram configurations are described in TS 36.508 [7] Annex A for the case of 2 E-UTRA RX antennas. For UEs with more than one E-UTRA antenna connector the fading of the signals and the AWGN signals applied to each receiver antenna connector shall be uncorrelated. The levels of the test signal applied to each of the antenna connectors shall be as defined in the respective test cases.

For testing a UE with a single E-UTRA antenna connector, the connection diagram configurations are not described in TS 36.508 [7] Annex A. If the E-UTRA UE supports only single RX antenna, the RX diversity connector in the diagram is not applicable.

3A.3.2 Test configuration for Inter band testcases

It is allowed to use separate AWGN generators for the different bands in interband test cases, although the connection diagrams in 36.508 Annex A display one wideband AWGN generator per DUT antenna connector. When interband testcases are also inter RAT, then it is necessary to use separated AWGN generators per RAT because of different noise density in different RATs. This is displayed accordingly in the connections in 36.508 Annex A.

3A.3.3 Test configuration for Inter RAT testcases

Editor's note: The impact on measurements on the non-LTE RAT needs to be evaluated for the receive diversity and non-receive diversity configurations.

The DUT may employ common antennas for different RATs or separated ones, leading to different connections. The diagrams in 36.508 Annex A display only the connections with common antennas for different RATs without excluding the separate case. Note that in case of separate antennas, also separate AWGNs and faders are necessary, if applicable.

The non E-UTRA RATs are undefined with respect to the RX antenna configuration. The diagrams in 36.508 Annex A display RX diversity with 2 antennas for the non E-UTRA RATs without excluding the single antenna case. If the non E-UTRA RAT support only single RX antenna, the RX diversity connector in the diagram is not applicable.

For UEs with more than one non-E-UTRA antenna connector the fading of the signals and the AWGN signals applied to each receiver antenna connector shall be uncorrelated. The levels of the test signal applied to each of the antenna connectors shall be as defined in the respective test cases.

With respect to the non E-UTRAN cell and AWGN, the diagrams in 36.508 Annex A are fully equipped, even if for certain RATs (e.g. GSM) the AWGN generator may be not applicable.

3A.3.4 UE with Multiband Capability

The Radio Resource Management performance of a UE in sections 4 - 8 is considered to be independent from all bands. Therefore, the required performance in the respective test cases can be verified in one of the bands supported by the UE, with the exception of inter-band testing requirements in clause 3A.1. The test cases in section 9 are considered to be band dependant and are therefore applicable in all of the supported bands in the UE.

3A.3.5 Operating band configuration

Inter-band configuration is not affecting the test purpose since the minimum requirements are valid regardless of band. Band combinations defined in table 3A.3.5-1 shall be used for testing.

Table 3A.3.5-1: Inter-band configuration

Band under test	Additional band
5	4
11	1
12	4
13	4
14	4
17	4
18	1
19	1
21	1

Note 1: The band under test should contain the interfrequency (neighbour) cell.

Note 2: The additional band should contain the serving cell of the test. If more than one inter-frequency cell is needed, that cell should be on the additional band.

Note 3: For inter-RAT tests, the E-UTRAN cell is on the additional band, and the non-E-UTRAN cell is on the band under test.

Note 4: Bands 5 and 11 only need inter-band configuration in test cases where 3 cells are required

4 E-UTRAN RRC_IDLE State Mobility

After the UE has switched on and a PLMN has been selected, the cell selection process takes place. This process allows the UE to select a suitable cell where to camp on in order to access available services. In this process the UE can use stored information (*Stored information cell selection*) or not (*Initial cell selection*).

When the UE is in either Camped Normally state or Camped on Any Cell state on a cell, the UE attempts to detect, synchronise, and monitor intra-frequency, inter-frequency and inter-RAT cells indicated by the serving cell, the cell reselection evaluation process takes place. This process allows the UE to select a more suitable cell and camp on it. In this process the UE measurement activity is controlled by measurement rules defined in TS 36.304 [6] clause 5.2.4.2, allowing the UE to limit its measurement activity.

4.1 E-UTRAN Cell Selection

Editor's note: There are currently no tests defined for E-UTRAN cell selection.

4.2 E-UTRAN Cell Re-Selection

4.2.1 E-UTRAN FDD - FDD cell re-selection intra frequency case

4.2.1.1 Test purpose

To verify that when the current and target cell operates on the same carrier frequency the UE is able to search and measure cells to meet the intra-frequency cell re-selection requirements.

4.2.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

4.2.1.3 Minimum conformance requirements

The cell re-selection delay shall be less than $T_{evaluate E-UTRAN_Intra} + T_{SI-EUTRA}$ in RRC_IDLE state.

The UE shall be able to identify new intra-frequency cells and perform RSRP measurement of identified intra-frequency cells without an explicit intra-frequency neighbour list containing physical layer cell identities.

The UE shall be able to evaluate whether a newly detectable intra-frequency cell meets the re-selection criteria defined in TS 36.304 [6] within $T_{\text{detect, EUTRAN_Intra}}$ as defined in table 4.2.2.3-1 of TS 36.133 [4] clause 4.2.2.3 when Treselection = 0 provided that the cell is at least 3 dB better ranked.

The UE shall measure RSRP at least every $T_{measure,EUTRAN_Intra}$ as defined in table 4.2.2.3-1 of TS 36.133 [4] clause 4.2.2.3 for intra-frequency cells that are identified and measured according to the measurement rules.

The UE shall filter RSRP measurement of each measured intra-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,EUTRAN\ Intra}/2$.

For an intra-frequency cell that has been already detected, but that has not been re-selected to, the filtering shall be such that the UE shall be capable of evaluating that the intra-frequency cell has met the re-selection criterion defined in TS 36.304 [6] within $T_{evaluateFDD,Intra}$ as defined in table 4.2.2.3-1 of TS 36.133 [4] clause 4.2.2.3 when Treselection = 0 provided that the cell is at least 3 dB better ranked. When evaluating cells for re-selection, the side conditions are RSRP and SCh apply to both serving and non-serving intra-frequency cells.

If Treselection timer has a non-zero value and the intra-frequency cell is better ranked than the serving cell, the UE shall evaluate this intra-frequency cell for the Treselection time. If this cell remains better ranked within this duration, then the UE shall re-select that cell.

The UE shall evaluate the intra-frequency cell re-selection criteria as defined in TS 36.304 [6] at least every DRX cycle. The DRX cycle length is 1.28 seconds. When a non-zero value of Treselection is used, the UE shall only perform reselection on an evaluation which occurs simultaneously to, or later than the expiry of the Treselection timer.

At intra-frequency cell re-selection, the UE shall monitor the downlink of serving cell for paging reception until the UE is capable to start monitoring downlink channels of the target intra-frequency cell for paging reception. The interruption time shall not exceed $T_{SI\text{-}EUTRA} + 50$ ms. $T_{SI\text{-}EUTRA}$ is the time required for receiving all the relevant system information data according to the reception procedure and the RRC procedure delay of system information blocks as defined in TS 36.331 [5] for a E-UTRAN cell.

For idle mode cell re-selection purposes, the UE shall be capable of monitoring at least:

- Intra-frequency carrier

In addition to the requirements defined in TS 36.133 [4] clause 4.2.2.9 a UE in RRC_IDLE state shall be capable of monitoring a total of at least 8 carrier frequency layers, which includes serving layer, comprising of any defined in TS 36.133 [4] clause 4.2.2.9 combination of E-UTRA FDD, E-UTRA TDD, UTRA FDD, UTRA TDD, GSM (one GSM layer corresponds to 32 cells), cdma2000 1x and HRPD layers.

The normative reference for this requirement is TS 36.133 [4] clause 4.2.2.3 and A.4.2.1.

4.2.1.4 Test description

4.2.1.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14.

- 2. The general test parameter settings are set up according to Table 4.2.1.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 4.2.1.4.3
- 5. There is one E-UTRA FDD carrier and two cells specified in the test. Cell 1 is the cell used for registration with the power level set according to Annex C.0 and C.1 for this test.

Table 4.2.1.4.1-1: General Test Parameters for E-UTRAN FDD-FDD intra cell re-selection test case

Parameter		Unit	Value	Comment
Initial Active cell			Cell1	
condition	Neighbour cells		Cell2	
T2 end	Active cell		Cell2	
condition	Neighbour cells		Cell1	
Final condition	Visited cell		Cell1	
E-UTRA R	F Channel Number		1	Only one FDD carrier frequency is used.
Channel B	andwidth (BW _{channel})	MHz	10	
Time offset	t between cells		3 ms	Asynchronous cells 3ms or 92160*Ts
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
PRACH configuration			4	As specified in table 5.7.1-2 in 3GPP TS 36.211 [9]
DRX cycle length		S	1.28	The value shall be used for all cells in the test.
T1		S	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2		S	40	T2 need to be defined so that cell re- selection reaction time is taken into account.
ТЗ		S	15	T3 need to be defined so that cell re- selection reaction time is taken into account.

4.2.1.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The UE is requested to monitor the neighbouring cell on one E-UTRA FDD carrier. In the test there are three successive time periods, with time duration of T1, T2 and T3 respectively. Only Cell 1 is already identified by the UE prior to the start of the test, i.e. Cell 2 is not identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing Cell 2.

- 1. Ensure the UE is in State 2A according to TS 36.508 [7] clause 4.5.2A. Set Cell 2 physical cell identity = initial cell 2 physical cell identity.
- 2. Set the parameters according to T1 in Table 4.2.1.5-1. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for one iteration of the test procedure loop.
- 4. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 4.2.1.5-1.
- 5. The SS waits for random access requests information from the UE to perform cell re-selection to a newly detectable cell, Cell 2.

- 6. If the UE responds on the newly detectable cell, Cell 2 during time duration T2 within 34 seconds from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 7. After the UE has re-selected Cell 2, or when T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 4.2.1.5-1.
- 8. The SS waits for random access requests information from the UE to perform cell re-selection to an already detected cell, Cell 1.
- 9. If the UE responds on the already detected cell, Cell 1 during time duration T3 within 8 seconds from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 10. After the UE has re-selected Cell 1, or when T3 expires, repeat step 2-9 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

4.2.1.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 4.2.1.4.3-1: Common Exception messages for E-UTRAN FDD-FDD intra cell re-selection test

Default Message Contents			
Common contents of system information	Table H.2.1-1		
blocks exceptions	Table H.2.1-2		
Default RRC messages and information	Table H.3.2-1		
elements contents exceptions			

4.2.1.5 Test requirement

Tables 4.2.1.4.1-1 and 4.2.1.5-1 defines the primary level settings including test tolerances for E-UTRAN FDD-FDD intra-frequency cell re-selection test case.

Table 4.2.1.5-1: Cell Specific Test requirement Parameters for E-UTRAN FDD-FDD intra frequency cell re-selection test case

Parameter	Unit	Cell 1			Cell 2			
		T1	T2	T3	T1	T2	Т3	
E-UTRA RF Channel		1			1			
Number								
BW _{channel}	MHz		10		10			
OCNG Patterns								
defined in D.1.2 (OP.2		OP.2 FDD			OP.2 FDD			
FDD)								
PBCH_RA								
PBCH_RB								
PSS_RA								
SSS_RA								
PCFICH_RB								
PHICH_RA								
PHICH_RB	dB		0			0		
PDCCH_RA								
PDCCH_RB								
PDSCH_RA								
PDSCH_RB								
OCNG_RA ^{Note 1}								
OCNG_RB ^{Note 1}								

Qrxlevmin	dBm	-140	-140	-140	-140	-140	-140
Pcompensation	dB	0	0	0	0	0	0
Qhysts	dB	0	0	0	0	0	0
Qoffset _{s, n}	dB	0	0	0	0	0	0
Cell_selection_and_re selection_quality_mea surement			RSRP			RSRP	
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	dB	16.00	-3.55	3.24	-infinity	3.24	-3.55
$N_{oc}^{ m Note~2}$	dBm/15 kHz	-98					
\hat{E}_s/N_{oc}	dB	16.00	13.00	16.45	-infinity	16.45	13.00
RSRP Note 3	dBm/15 kHz	-82.00	-85.00	-81. 55	-infinity	-81. 55	-85.00
Treselection	S	0	0	0	0	0	0
Sintrasearch	dB	Not sent			Not sent		
Propagation Condition		AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

The cell re-selection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to a newly detectable cell test requirement in this case is expressed as:

 $Cell \ re-selection \ delay \ to \ a \ newly \ detectable \ cell = T_{detect,E-UTRAN_Intra} + T_{SI-EUTRA}$

 $T_{detect,E-UTRAN\ Intra} = 32 \text{ s}$; as specified in TS 36.133 [4] clause 4.2.2.3.

 $T_{SI-EUTRA}$ = 1280 ms; maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell is assumed in this test; as specified in TS 36.133 [4] clause 4.2.2.3

The cell re-selection delay to a newly detectable cell shall be less than a total of 34 seconds in this test case (note: this gives a total of 33.28 seconds but the test allows 34 seconds).

The cell re-selection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to an already detected cell test requirement in this case is expressed as:

 $Cell\ re-selection\ to\ an\ already\ detected\ cell\ delay = T_{evaluate,E-UTRAN_Intra} + T_{SI-EUTRAN_Intra} + T_{SI-EUTRAN_INTA} + T_{SI-EUTRAN_I$

 $T_{evaluate,E-UTRAN\ Intra} = 6.40\ s$; as specified in TS 36.133 [4] clause 4.2.2.3.

 $T_{SI\text{-}EUTRA} = 1280 \text{ ms}$; maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell is assumed in this test; as specified in TS 36.133 [4] clause 4.2.2.3

The cell re-selection delay to an already detected cell shall be less than a total of 8 seconds in this test case (note: this gives a total of 7.68 seconds but the test allows 8 seconds).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{ac} to be fulfilled.

Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

4.2.2 E-UTRAN TDD - TDD cell re-selection intra frequency case

4.2.2.1 Test purpose

To verify that when the current and target cell operates on the same carrier frequency the UE is able to search and measure cells to meet the intra-frequency cell re-selection requirements.

4.2.2.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

4.2.2.3 Minimum conformance requirements

The cell re-selection delay shall be less than $T_{evaluate,E-UTRAN_Intra} + T_{SI-EUTRA}$ in RRC_IDLE state.

The UE shall be able to identify new intra-frequency cells and perform RSRP measurement of identified intra-frequency cells without an explicit intra-frequency neighbour list containing physical layer cell identities.

The UE shall be able to evaluate whether a newly detectable intra-frequency cell meets the re-selection criteria defined in TS 36.304 [6] within $T_{detect,EUTRAN_Intra}$ as defined in table 4.2.2.3-1 of TS 36.133 [4] clause 4.2.2.3 when Treselection = 0.

The UE shall measure RSRP at least every $T_{measure, EUTRAN_Intra}$ as defined in table 4.2.2.3-1 of TS 36.133 [4] clause 4.2.2.3 for intra-frequency cells that are identified and measured according to the measurement rules.

The UE shall filter RSRP measurements of each measured intra-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,EUTRAN_Intra/2}$.

For an intra-frequency cell that has been already detected, but that has not been re-selected to, the filtering shall be such that the UE shall be capable of evaluating that the intra-frequency cell has met the re-selection criterion defined in TS 36.304 [6] within $T_{evaluate,E-UTRAN_Intra}$ as defined in table 4.2.2.3-1 of TS 36.133 [4] clause 4.2.2.3 when Treselection = 0 provided that the cell is at least 3 dB better ranked. When evaluating cells for reselection, the side conditions for RSRP and SCH apply to both serving and non-serving intra-frequency cells.

If Treselection timer has a non-zero value and the intra-frequency cell is better ranked than the serving cell, the UE shall evaluate this intra-frequency cell for the Treselection time. If this cell remains better ranked within this duration, then the UE shall re-select that cell.

The UE shall evaluate the intra-frequency cell re-selection criteria as defined in TS 36.304 [6] at least every DRX cycle. The DRX cycle length is 1.28 seconds.

At intra-frequency cell re-selection, the UE shall monitor the downlink of serving cell for paging reception until the UE is capable to start monitoring downlink channels of the target intra-frequency cell for paging reception. The interruption time shall not exceed $T_{SI\text{-}EUTRA} + 50$ ms. $T_{SI\text{-}EUTRA}$ is the time required for receiving all the relevant system information data according to the reception procedure and the RRC procedure delay of system information blocks as defined in TS 36.331 [5] for a E-UTRAN cell.

The normative reference for this requirement is TS 36.133 [4] clause 4.2.2.3 and A.4.2.2.

4.2.2.4 Test description

4.2.2.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

1. Connect the SS (node B emulator) and AWGN noise source to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14.

- 2. The general test parameter settings are set up according to Table 4.2.2.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 4.2.2.4.3.
- 5. There is one E-UTRA TDD carrier and two cells specified in the test. Cell 1 is the cell used for registration with the power level set according to Table clause C.0 and C.1 for this test.

Table 4.2.2.4.1-1: General Test Parameters for E-UTRAN TDD-TDD intra cell re-selection test case

Parameter		Unit	Value	Comment		
Initial condition	Active cell		Cell1			
	Neighbour cells		Cell2			
T2 end	Active cell		Cell2			
condition	Neighbour cells		Cell1			
Final condition	Visited cell		Cell1			
E-UTRA RF Channel Number			1	Only one TDD carrier frequency is used.		
Channel Bandwidth (BW _{channel})		MHz	10			
Time offset between	een cells	μs	3	Synchronous cells		
				3μs or 92*Ts		
Access Barring Information		-	Not	No additional delays in random access procedure.		
			Sent			
Special subframe configuration			6	As specified in table 4.2-1 in 3GPP TS 36.211		
Uplink-downlink configuration			1	As specified in table 4.2-2 in 3GPP TS 36.211		
PRACH configuration index			53	As specified in table 5.7.1-3 in 3GPP TS 36.211		
DRX cycle length		S	1.28	The value shall be used for all cells in the test.		
T1		S	>7	During T1, Cell 2 shall be powered off, and during the off		
				time the physical cell identity shall be changed, The intention		
				is to ensure that Cell 2 has not been detected by the UE prior		
				to the start of period T2		
T2		S	40	T2 need to be defined so that cell re-selection reaction time		
				is taken into account.		
T3		s	15	T3 need to be defined so that cell re-selection reaction time		
				is taken into account.		

4.2.2.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The UE is requested to monitor the neighbouring cell on one E-UTRA TDD carrier. In the test there are three successive time periods, with time duration of T1, T2, and T3 respectively. Only Cell 1 is already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing Cell 2.

- 1. Ensure the UE is in State 2A according to TS 36.508 [7] clause 4.5.2A. Set Cell 2 physical cell identity = initial cell 2 physical cell identity.
- 2. Set the parameters according to T1 in Table 4.2.2.5-1. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for one iteration of the test procedure loop.
- 4. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 4.2.2.5-1.
- 5. The SS waits for random access requests information from the UE to perform cell re-selection to a newly detectable cell, Cell 2.
- 6. If the UE responds on the newly detectable cell, Cell 2, during time duration T2 within 34 seconds from the beginning of time period T2, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 7. After the UE has re-selected Cell 2, or when T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 4.2.2.5-1.

- 8. The SS waits for random access requests information from the UE to perform cell re-selection to an already detected cell, Cell 1.
- 9. If the UE responds on the already detected cell, Cell 1, during time duration T3 within 8 seconds from the beginning of time period T3, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 10. After the UE has re-selected Cell 1, or when T3 expires, repeat step 2-9 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

4.2.2.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 4.2.2.4.3-1: Common Exception messages for E-UTRAN TDD-TDD intra cell re-selection test case

Default Message Contents	
Common contents of system information	Table H.2.1-1
blocks exceptions	Table H.2.1-2
Default RRC messages and information	Table H.3.2-2
elements contents exceptions	

4.2.2.5 Test requirement

Tables 4.2.2.4.1-1, and 4.2.2.5-1 defines the primary level settings including test tolerances for E-UTRAN TDD-TDD intra frequency cell re-selection test case.

Table 4.2.2.5-1: Cell Specific Test requirement Parameters for E-UTRAN TDD-TDD intra frequency cell re-selection test case

Parameter	Unit	Cell 1				Cell 2	
		T1	T2	T3	T1	T2	T3
E-UTRA RF Channel Number			1			1	
BW _{channel}	MHz		10			10	
OCNG Pattern defined in D.2.2 (OP.2 TDD)			OP.2 TDD		OP.2 TDD		
PBCH_RA							
PBCH_RB							
PSS_RA							
SSS_RA							
PCFICH_RB							
PHICH_RA							
PHICH_RB	dB		0			0	
PDCCH_RA							
PDCCH_RB							
PDSCH_RA							
PDSCH_RB							
OCNG_RA ^{Note 1}							
OCNG_RB ^{Note 1}							

Qrxlevmin	dBm		-140			-140		
Pcompensation	dB	0			0			
Qhyst _s	dB		0			0		
Qoffset _{s, n}	dB		0			0		
Cell_selection_and_ reselection_quality_m easurement		RSRP RSRP						
$\hat{\mathbf{E}}_{\mathrm{s}}/\mathbf{I}_{\mathrm{ot}}$	dB	16.00	-3.55	3.24	-infinity	3.24	-3.55	
N_{oc}	dBm/15 kHz			-6	98			
\hat{E}_s/N_{oc}	dB	16.00	13.00	16.45	-infinity	16.45	13.00	
RSRP	dBm/15 kHz	-82.00	-85.00	-81. 55	-infinity	-81. 55	-85.00	
Treselection	S	0	0	0	0	0	0	
Sintrasearch	dB	Not sent Not sent						
Propagation Condition		AWGN						

Note: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

The cell re-selection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to a newly detectable cell test requirement in this case is expressed as:

Cell re-selection delay to a newly detectable $cell = T_{detect, EUTRAN_Intra} + T_{SI-EUTRAN}$

 $T_{detect, EUTRAN_Intra} = 32 \text{ s}$; as specified in TS 36.133 [4] clause 4.2.2.3.

 $T_{SI-EUTRA}$ = 1280 ms; maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell is assumed in this test; as specified in TS 36.133 [4] clause 4.2.2.7

The cell re-selection delay to a newly detectable cell shall be less than a total of 34 seconds in this test case (note: this gives a total of 33.28 seconds but the test allows 34 seconds).

The cell re-selection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on Cell 1 and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to an already detected cell test requirement in this case is expressed as:

Cell re-selection to an already detected cell delay = $T_{evaluate,E-UTRAN_Intra} + T_{SI-EUTRA}$

 $T_{evaluate,E-UTRAN\ Intra} = 6.40 \text{ s}$; as specified in TS 36.133 [4] clause 4.2.2.3

 $T_{SI-EUTRA} = 1280 \text{ ms}$; as specified in TS 36.133 [4] clause 4.2.2.7

The cell re-selection delay to an already detected cell shall be less than a total of 8 seconds in this test case (note: this gives a total of 7.68 seconds but the test allows 8 seconds).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

4.2.3 E-UTRAN FDD - FDD cell re-selection inter frequency case

4.2.3.1 Test purpose

To verify that when the neighbour cell operates on a different carrier frequency, compared to the current cell the UE is able to search and measure cells to meet the inter-frequency cell re-selection requirements.

4.2.3.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

4.2.3.3 Minimum conformance requirements

The cell re-selection delay shall be less than $T_{evaluate,E-UTRAN_Inter} + T_{SI-EUTRA}$ in RRC_IDLE state.

The UE shall be able to identify new inter-frequency cells and perform RSRP measurements of identified inter-frequency cells if carrier frequency information is provided by the serving cell, even if no explicit neighbour list with physical layer cell identities is provided.

If the $S_{ServingCell}$ of the E-UTRA serving cell is greater than $S_{nonintrasearch}$ then the UE shall search for inter-frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in TS 36.133 [4] clause 4.2.2 as $T_{higher_priority_search} = (60 * N_{layers})$ seconds, where the parameter N_{layers} is the total number of configured higher priority E-UTRA carrier frequencies.

If the $S_{ServingCell}$ of the E-UTRA serving cell is less than or equal to $S_{nonintrasearch}$ then the UE shall search for and measure inter-frequency layers of higher, equal or lower priority in preparation for possible re-selection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority layers shall be the same as that defined below for lower or equal priority inter-frequency layers.

The UE shall be able to evaluate whether a newly detectable lower or equal priority inter-frequency cell meets the reselection criteria defined in TS 36.304 [6] within $K_{carrier} * T_{detect,EUTRAN_Inter}$ (as defined in table 4.2.2.4-1 of TS 36.133 [4] clause 4.2.2.4) if at least carrier frequency information is provided for inter-frequency neighbour cells by the serving cells when Treselection_{EUTRAN} = 0 provides that the re-selection criteria is met by a margin of at least 5 dB for reselection based on ranking or 6 dB for re-selection based on absolute priorities. The parameter $K_{carrier}$ is the number of E-UTRA inter-frequency carriers indicated by the serving cell.

When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{measure,EUTRAN_Inter}$. If re-selection to any higher priority cell is not triggered within ($T_{evaluateFDD, Inter}$ + Treselection_{EUTRAN}) after it is found in a higher priority search, the UE is not required to continue making measurements of the cell to evaluate the ongoing possibility of re-selection. If the UE detects on an E-UTRA carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall measure RSRP at least every $K_{carrier} * T_{measure, EUTRAN_Inter}$ DRX cycle as defined in table 4.2.2.4-1 of TS 36.133 [4] clause 4.2.2.4 for identified lower or equal priority inter-frequency cells. If the UE detects on an E-UTRA carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall filter RSRP measurements of each measured higher, lower and equal priority inter-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,EUTRAN_Inter}/2$.

The UE shall not consider an E-UTRA neighbour cell in cell re-selection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an inter-frequency cell that has been already detected, but that has not been re-selected to, the filtering shall be such that the UE shall be capable of evaluating that the inter-frequency cell has met re-selection criterion defined in TS 36.304 [6] within $K_{carrier} * T_{evaluate,E-UTRAN_Inter}$ as defined in table 4.2.2.4-1 of TS 36.133 [4] clause 4.2.2.4 when Treselection_{EUTRAN} = 0 provides that the re-selection criteria is met by a margin of at least 5 dB for re-selection based on ranking or 6 dB for re-selection based on absolute priorities. When evaluating cells for re-selection, the side conditions for RSRP and SCH apply to both serving and inter-frequency cells.

If Treselection_{EUTRAN} timer has a non-zero value and the inter-frequency cell is better ranked than the serving cell, the UE shall evaluate this inter-frequency cell for the Treselection_{EUTRAN} time. If this cell remains better ranked within this duration, then the UE shall re-select that cell.

The UE shall evaluate the inter-frequency cell re-selection criteria as defined in TS 36.304 [6] at least every DRX cycle. The DRX cycle length is 1.28 seconds. When a non-zero value of Treselection_{EUTRAN} is used, the UE shall only perform re-selection on an evaluation which occurs simultaneously to, or later than the expiry of the Treselection_{EUTRAN} timer.

At inter-frequency cell re-selection, the UE shall monitor the downlink of serving cell for paging reception until the UE is capable to start monitoring downlink channels of the target inter-frequency cell for paging reception. The interruption time shall not exceed $T_{SI\text{-}EUTRA} + 50$ ms. $T_{SI\text{-}EUTRA}$ is the time required for receiving all the relevant system information data according to the reception procedure and the RRC procedure delay of system information blocks as defined in TS 36.331 [5] for a E-UTRAN cell.

For idle mode cell re-selection purposes, the UE shall be capable of monitoring at least:

- Depending on UE capability, 3 FDD E-UTRA inter-frequency carriers

In addition to the requirements defined in TS 36.133 [4] clause 4.2.2.9 a UE in RRC_IDLE state shall be capable of monitoring a total of at least 8 carrier frequency layers, which includes serving layer, comprising of any defined in TS 36.133 [4] clause 4.2.2.9 combination of E-UTRA FDD, E-UTRA TDD, UTRA FDD, UTRA TDD, GSM (one GSM layer corresponds to 32 cells), cdma2000 1x and HRPD layers.

The normative reference for this requirement is TS 36.133 [4] clause 4.2.2.4 and A.4.2.3.

4.2.3.4 Test description

4.2.3.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14.
- 2. The general test parameter settings are set up according to Table 4.2.3.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 4.2.3.4.3.
- 5. There are two E-UTRA FDD carriers and two cells specified in the test. Cell 2 is the cell used for registration with the power level set according to Annex C.0 and C.1 for this test.

Table 4.2.3.4.1-1: General Test Parameters for E-UTRAN FDD-FDD inter frequency cell re-selection test case

F	Parameter	Unit	Value	Comment
Initial condition	Active cell		Cell2	UE shall be forced to cell 2 in the initialisation phase, so that reselection to cell 1 occurs during the first T1 phase
T1 end	Active cell		Cell1	UE shall perform reselection to cell 1 during T1
condition	Neighbour cell		Cell2	
Final condition	Active cell		Cell2	UE shall perform reselection to cell 2 during T3
E-UTRA RF	Channel Number		1, 2	Two FDD carrier frequencies are used.
Time offset between cells		ms	3	Asynchronous cells
				3ms or 92160*Ts
PRACH configuration			4	As specified in table 5.7.1-2 in TS 36.211 [9]
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
DRX cycle I	ength	S	1.28	The value shall be used for all cells in the test.
T1		S	15	T1 need to be defined so that cell re-selection reaction time is taken into account.
T2		S	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3		s	75	T3 need to be defined so that cell re-selection reaction time is taken into account.

4.2.3.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The UE is requested to monitor the neighbouring cell on one of the E-UTRA FDD carriers. In the test there are three successive time periods, with time duration of T1, T2 and T3 respectively. Both Cell 1 and Cell 2 are already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas and Cell 2 is of higher priority than Cell 1. Furthermore, UE has not registered with network for the tracking area containing Cell 1.

- 1. Ensure the UE is in State 2A according to TS 36.508 [7] clause 4.5.2A.
- 2. Set the parameters according to duration T0 in Table 4.2.3.5-1
- 3. Set the parameters according to duration T1 in Table 4.2.3.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 4. The SS waits for random access requests information from the UE to perform cell re-selection on the lower priority cell, Cell 1.
- 5. If the UE responds on lower priority cell, Cell 1 during time duration T1 within 8 seconds from the beginning of time period T1 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 6. After the UE has re-selected Cell 1, or when T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 4.2.3.5-2. During time duration T2, Cell 2 shall be powered OFF and the physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) shall be changed to ensure Cell 2 is not detected by the UE.
- 7. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 4.2.3.5-2.
- 8. The SS waits for random access requests information from the UE to perform cell re-selection on the higher priority cell, Cell 2.
- 9. If the UE responds on higher priority cell, Cell 2 during time duration T3 within 68 seconds from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 10. After the UE has re-selected Cell 2, or when T3 expires, repeat step 3-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.2.3.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 4.2.3.4.3-1: Common Exception messages for E-UTRAN FDD-FDD inter frequency cell reselection test case

Default Message Contents	
Common contents of system information	Table H.2.2-1
blocks exceptions	Table H.2.2-2
Default RRC messages and information	Table H.3.2-1
elements contents exceptions	

4.2.3.5 Test requirement

Tables 4.2.3.4.1-1, 4.2.3.5-1 and 4.2.3.5-2 define the primary level settings including test tolerances for E-UTRAN FDD-FDD inter-frequency cell re-selection test case. Note that the time period for T0 is system implementation dependent.

Table 4.2.3.5-1: Cell Specific Test requirement Parameters for E-UTRAN FDD-FDD inter frequency cell re-selection test case

Parameter	Unit	Cell 1	Cell 2
		T0	
E-UTRA RF Channel number		1	2
BW _{channel}	MHz	10	
OCNG Patterns defined in		OP.2 F	FDD
D.1.2 (OP.2 FDD)			
PBCH_RA	dB		
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB	0	0
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA ^{Note 1}	dB		
OCNG_RB ^{Note 1}	dB		
Qrxlevmin	dBm	-14	0
$N_{oc}^{ m Note 2}$	dBm/15 kHz	-99,	1
RSRP Note 3	dBm/15 KHz	-102.8	-83.2
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	dB	-3.70	15.90
\hat{E}_s/N_{oc}	dB	-3.70	15.90
Treselection _{EUTRAN}	S	0	0
Snonintrasearch	dB	50	Not sent
Thresh _{x, high}	dB	48	48
Thresh _{serving, low}	dB	44	44
Thresh _{x, low}	dB	50	50
Propagation Condition		AWG	SN

- Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
- Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 4.2.3.5-2: Cell Specific Test requirement Parameters for E-UTRAN FDD-FDD inter frequency cell re-selection test case

Parameter	Unit		Cell 1			Cell 2		
		T1	T2	Т3	T1	T2	Т3	
E-UTRA RF Channel number			1		2			
BW _{channel}	MHz	10 10						
OCNG Patterns defined in		OP.2 FDD OP.2 FDD						
D.1.2 (OP.2 FDD)								
PBCH_RA	dB							
PBCH_RB	dB							
PSS_RA	dB							
SSS_RA	dB							
PCFICH_RB	dB							
PHICH_RA	dB							
PHICH_RB	dB		0			0		
PDCCH_RA	dB							
PDCCH_RB	dB							
PDSCH_RA	dB							
PDSCH_RB	dB							
OCNG_RA ^{Note 1}	dB							
OCNG_RB ^{Note 1}	dB							
Qrxlevmin	dBm		-140		-140			
$N_{oc}^{ m Note 2}$	dBm/15 kHz				-99,1			
RSRP Note 3	dBm/15 KHz	-83.2	-83.2	-83.2	-102.8	-infinity	-85.2	
\hat{E}_{s}/I_{ot}	dB	15.90	15.90	15.90	-3.70	-infinity	13.90	
\hat{E}_s/N_{oc}	dB	15.90	15.90	15.90	-3.70	-infinity	13.90	
Treselection _{EUTRAN}	S		0			0		
Snonintrasearch	dB		50			Not sent		
Thresh _{x, high}	dB		48			48		
Thresh _{serving, low}	dB		44			44		
Thresh _{x, low}	dB		50			50		
Propagation Condition					AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The cell re-selection delay to lower priority is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to lower priority test requirement in this case is expressed as:

 $Cell \ re-selection \ delay \ to \ lower \ priority = T_{evaluate, E-UTRAN_Inter} + T_{SI-EUTRAN_Inter} + T_$

 $T_{evaluate,E-UTRAN\ Inter} = 6.40 \text{ s}$; as specified in TS 36.133 [4] clause 4.2.2.4

 $T_{SI-EUTRA} = 1280 \text{ ms}$; as specified in TS 36.133 [4] clause 4.2.2.4

The cell re-selection delay to lower priority shall be less than a total of 8 seconds in this test case (note: this gives a total of 7.68 seconds but the test allows 8 seconds).

The cell re-selection delay to higher priority is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2 and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to higher priority test requirement in this case is expressed as:

 $Cell \ re-selection \ delay \ to \ higher \ priority = T_{higher_priority_search} + T_{evaluate,E-UTRAN_Inter} + T_{SI-EUTRAN_Inter} + T_{SI-EUTRAN_INTE$

 $T_{\text{higher priority search}} = 60 \text{ s}$; as specified in TS 36.133 [4] clause 4.2.2

 $T_{evaluate, E-UTRAN_Inter} = 6.40 \text{ s}$; as specified in TS 36.133 [4] clause 4.2.2.4

 $T_{SI-EUTRA} = 1280 \text{ ms}$; as specified in TS 36.133 [4] clause 4.2.2.4

The cell re-selection delay to higher priority shall be less than a total of 68 seconds in this test case (note: this gives a total of 67.68 seconds but the test allows 68 seconds).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

- 4.2.4 E-UTRAN FDD TDD cell re-selection inter frequency case
- 4.2.5 E-UTRAN TDD FDD cell re-selection inter frequency case
- 4.2.6 E-UTRAN TDD TDD cell re-selection inter frequency case

4.2.6.1 Test purpose

To verify that when the neighbour cell operates on a different carrier frequency, compared to the current cell the UE is able to search and measure cells to meet the inter-frequency cell re-selection requirements.

4.2.6.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

4.2.6.3 Minimum conformance requirements

The cell re-selection delay shall be less than T_{evaluate.E-UTRAN Inter} + T_{SI-EUTRA} in RRC_IDLE state.

The UE shall be able to identify new inter-frequency cells and perform RSRP measurements of identified inter-frequency cells if carrier frequency information is provided by the serving cell, even if no explicit neighbour list with physical layer cell identities is provided.

If the $S_{ServingCell}$ of the E-UTRA serving cell is greater than $S_{nonintrasearch}$ then the UE shall search for inter-frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in section 4.2.2 of TS 36.133 [4].

If the $S_{ServingCell}$ of the E-UTRA serving cell is less than or equal to $S_{nonintrasearch}$ then the UE shall search for and measure inter-frequency layers of higher, equal or lower priority in preparation for possible re-selection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority layers shall be the same as that defined below for a lower or equal priority inter-frequency layers.

The UE shall be able to evaluate whether a newly detectable lower or equal priority inter-frequency cell meets the reselection criteria defined in TS 36.304 [6] within $K_{carrier} * T_{detect,EUTRAN_Inter}$ (as defined in table 4.2.2.4-1 of TS 36.133 [4] clause 4.2.2.4) if at least carrier frequency information is provided for inter-frequency neighbour cells by the serving cells when Treselection_{EUTRAN} = 0 provided that the reselection criteria is met by a margin of at least 5dB for reselections based on ranking or 6dB for reselections based on absolute priorities. The parameter $K_{carrier}$ is the number of E-UTRA inter-frequency carriers indicated by the serving cell.

When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{measure,EUTRAN_Inter}$. If, after it is found in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of re-selection. However, the minimum measurement filtering requirements specified later in this section shall still be met by the UE before it makes any determination that it may stop measuring the cell. If the UE detects on a E-UTRA carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall measure RSRP at least every $K_{carrier} * T_{measure,EUTRAN_Inter}$ as defined in table 4.2.2.4-1 of TS 36.133 [4] clause 4.2.2.4 for identified lower or equal priority inter-frequency cells. If the UE detects on an E-UTRA carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall filter RSRP measurements of each measured higher, lower and equal priority inter-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,EUTRAN_Inter}/2$.

The UE shall not consider an E-UTRA neighbour cell in cell re-selection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an inter-frequency cell that has been already detected, but that has not been re-selected to, the filtering shall be such that the UE shall be capable of evaluating that the inter-frequency cell has met re-selection criterion defined in TS 36.304~[6] within $K_{carrier} * T_{evaluate,E-UTRAN_Inter}$ as defined in table 4.2.2.4-1 of TS 36.133~[4] clause 4.2.2.4 when Treselection_{EUTRAN} = 0 provides that the re-selection criteria is met by a margin of at least 5dB for re-selection based on ranking or 6dB for re-selection based on absolute priorities. When evaluating cells for reselection, the side conditions for RSRP and SCH apply to both serving and inter-frequency cells.

If Treselection_{EUTRAN} timer has a non-zero value and the inter-frequency cell is better ranked than the serving cell, the UE shall evaluate this inter-frequency cell for the Treselection_{EUTRAN} time. If this cell remains better ranked within this duration, then the UE shall re-select that cell.

The UE shall evaluate the inter-frequency cell re-selection criteria as defined in TS 36.304 [6] at least every DRX cycle. The DRX cycle length is 1.28 seconds.

At inter-frequency cell re-selection, the UE shall monitor the downlink of serving cell for paging reception until the UE is capable to start monitoring downlink channels of the target inter-frequency cell for paging reception. The interruption time shall not exceed $T_{SI\text{-}EUTRA} + 50$ ms. $T_{SI\text{-}EUTRA}$ is the time required for receiving all the relevant system information data according to the reception procedure and the RRC procedure delay of system information blocks as defined in TS 36.331 [5] for a E-UTRAN cell.

The normative reference for this requirement is TS 36.133 [4] clause 4.2.2.4 and A.4.2.6.

4.2.6.4 Test description

4.2.6.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (eNodeB emulator) and AWGN noise source to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14.
- 2. The general test parameter settings are set up according to Table 4.2.6.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 4.2.6.4.3.
- 5. There are two E-UTRA TDD carriers and two cells specified in the test. Cell 2 is the cell used for registration with the power level set according to clause C.0 and C.1 for this test.

Table 4.2.6.4.1-1: General Test Parameters for E-UTRAN TDD-TDD inter frequency cell re-selection test case

	Parameter	Unit	Value	Comment
Initial condition	Active cell		Cell2	UE shall be forced to cell 2 in the initialisation phase, so that reselection to cell 1 occurs during the first T1 phase
T1 end	Active cell		Cell1	UE shall perform reselection to cell 1 during T1
condition	Neighbour cell		Cell2	
Final condition	Active cell		Cell2	UE shall perform reselection to cell 2 during T3
E-UTRA RF	Channel Number		1, 2	Two TDD carrier frequencies are used.
Time offset	between cells	μs	3	Synchronous cells 3μs or 92*Ts
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Special sub	frame configuration		6	As specified in table 4.2-1 in 3GPP TS 36.211
Uplink-dow	nlink configuration		1	As specified in table 4.2-2 in 3GPP TS 36.211
PRACH cor	nfiguration index		53	As specified in table 5.7.1-3 in 3GPP TS 36.211
DRX cycle I	ength	s	1.28	The value shall be used for all cells in the test.
T1		S	15	T1 need to be defined so that cell re-selection reaction time is taken into account.
T2		S	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3		s	75	T3 need to be defined so that cell re-selection reaction time is taken into account.

4.2.6.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The UE is requested to monitor the neighbouring cell on one E-UTRA TDD carrier. In the test there are three successive time periods, with time duration of T1, T2, and T3 respectively. Both Cell 1 and Cell 2 are already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas and Cell 2 is of higher priority than Cell 1. Furthermore, UE has not registered with network for the tracking area containing Cell 1.

- 1. Ensure the UE is in State 2A according to TS 36.508 [7] clause 4.5.2A.
- 2. Set the parameters according to duration T0 in Table 4.2.6.5-1
- 3. Set the parameters according to duration T1 in Table 4.2.6.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 4. The SS waits for random access requests information from the UE to perform cell re-selection procedure on the lower priority cell, Cell 1.
- 5. If the UE responds on the lower priority cell, Cell 1, during time duration T1 within 8 seconds from the beginning of time period T1 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 6. After the UE has re-selected Cell 1, or when T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 4.2.6.5-2. During time duration T2, Cell 2 shall be powered OFF and change Cell 2 physical cell identity to ((current cell 2 physical cell identity + 1) mod 14 + 2) to ensure Cell 2 is not detected by the UE.
- 7. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 4.2.6.5-2.
- 8. The SS waits for random access requests information from the UE to perform cell re-selection procedure on the higher priority cell, Cell 2.
- 9. If the UE responds on higher priority cell, Cell 2, during time duration T3 within 68 seconds from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

10. After the UE has re-selected Cell 2, or when T3 expires, repeat step 3-9 until the confidence level according to Table G.2.3-1 in Annex G clause G.2.3 is achieved.

4.2.6.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.4.3.3 and 4.6.3 with the following exceptions:

Table 4.2.6.4.3-1: Common Exception messages for E-UTRAN TDD-TDD inter frequency cell reselection test case

Default Message Contents	
Common contents of system information	Table H.2.2-1
blocks exceptions	Table H.2.2-2
Default RRC messages and information	Table H.3.2-2
elements contents exceptions	

4.2.6.5 Test requirement

Tables 4.2.6.4.1-1, 4.2.6.5-1 and 4.2.6.5-2 defines the primary level settings including test tolerances for E-UTRAN TDD-TDD inter frequency cell re-selection test case. Note that the time period for T0 is system implementation dependent.

Table 4.2.6.5-1: Cell Specific Test requirement Parameters for E-UTRAN TDD-TDD inter frequency cell re-selection test case

Parameter	Unit	Cell 1	Cell 2
		T0	
E-UTRA RF Channel number		1	2
BW _{channel}	MHz	10	
OCNG Patterns defined in		OP.2	ΓDD
D.2.2 (OP.2 TDD)			
PBCH_RA	dB		
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB	0	0
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA ^{Note 1}	dB		
OCNG_RB ^{Note 1}	dB		

Qrxlevmin	dBm	-140)
$N_{oc}^{ m Note 2}$	dBm/15 kHz	-99,	1
RSRP Note 3	dBm/15 KHz	-102.8	-83.2
\hat{E}_{s}/I_{ot}	dB	-3.70	15.90
\hat{E}_s/N_{oc}	dB	-3.70	15.90
Treselection _{EUTRAN}	S	0	0
Snonintrasearch	dB	50	Not sent
Thresh _{x, high}	dB	48	48
Thresh _{serving, low}	dB	44	44
Thresh _{x, low}	dB	50	50
Propagation Condition		AWG	SN

- Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
- Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 4.2.6.5-2: Cell Specific Test requirement Parameters for E-UTRAN TDD-TDD inter frequency cell re-selection test case

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	Т3	T1	T2	Т3
E-UTRA RF Channel number			1 2			2	
BW _{channel}	MHz		10 10				
OCNG Pattern defined in			OP.2 TDD			OP.2 TDD	
D.2.2 (OP.2 TDD)							
PBCH_RA	dB						
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PCFICH_RB	dB						
PHICH_RA	dB						
PHICH_RB	dB		0			0	
PDCCH_RA	dB						
PDCCH_RB	dB						
PDSCH_RA	dB	1					
PDSCH_RB	dB]					
OCNG_RA ^{Note 1}	dB	1					
OCNG_RB ^{Note 1}	dB	1					

Qrxlevmin	dBm	-140 -140						
N_{oc}	dBm/15 kHz	-99,1						
RSRP	dBm/15 KHz	-83.2	-83.2	-83.2	-102.8	-infinity	-85.2	
\hat{E}_{s}/I_{ot}	dB	15.90	15.90	15.90	-3.70	-infinity	13.90	
\hat{E}_s/N_{oc}	dB	15.90	15.90	15.90	-3.70	-infinity	13.90	
Treselection _{EUTRAN}	S		0		0			
Snonintrasearch	dB		50		Not sent			
Thresh _{x, high}	dB	48 48						
Thresh _{serving, low}	dB	44 44						
Thresh _{x, low}	dB	50 50					•	
Propagation Condition		AWGN						

- Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{ac} to be fulfilled.
- Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The cell re-selection delay to higher priority is defined as the time from the beginning of time period T3, to the moment when the UE camps on Cell 2 and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to higher priority test requirement in this case is expressed as:

Cell re-selection delay to higher priority = $T_{higher_priority_search} + T_{evaluate,E-UTRAN_Inter} + T_{SI-EUTRAN}$

 $T_{higher_priority_search} = 60 \text{ s}$; as specified in TS 36.133 [4] clause 4.2.2

 $T_{\text{evaluate,E-UTRAN Inter}} = 6.40 \text{ s}$; as specified in TS 36.133 [4] clause 4.2.2.4

 $T_{SL-ELITRA} = 1280 \text{ ms}$; as specified in TS 36.133 [4] clause 4.2.2.7

The cell re-selection delay to higher priority shall be less than a total of 68 seconds in this test case (note: this gives a total of 67.68 seconds but the test allows 68 seconds).

The cell re-selection delay to lower priority is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 1 and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on Cell 1. The cell re-selection delay to lower priority test requirement in this case is expressed as:

Cell re-selection delay to lower priority = $T_{evaluate,E-UTRAN_Inter} + T_{SI-EUTRAN}$

T_{evaluate,E-UTRAN Inter} = 6.40 s; as specified in TS 36.133 [4] clause 4.2.2.4

 $T_{SI\text{-}EIJTRA}$ = 1280 ms; as specified in TS 36.133 [4] clause 4.2.2.7

The cell re-selection delay to lower priority shall be less than a total of 8 seconds in this test case (note: this gives a total of 7.68 seconds but the test allows 8 seconds).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

4.3 E-UTRAN to UTRAN Cell Re-Selection

4.3.1 E-UTRAN FDD - UTRAN FDD cell re-selection

4.3.1.1 E-UTRA FDD - UTRAN FDD cell reselection: UTRA FDD is of higher priority

4.3.1.1.1 Test purpose

To verify that the UE is able to search and measure neighbouring UTRA FDD cells and compare to the E-UTRA serving cell to meet the inter-RAT cell re-selection requirements when the UTRA is of higher priority.

4.3.1.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward that support UTRA FDD.

4.3.1.1.3 Minimum conformance requirements

When the measurement rules indicate that UTRA FDD cells are to be measured, the UE shall measure CPICH Ec/Io and CPICH RSCP of detected UTRA FDD cells in the neighbour frequency list at the minimum measurement rate. The parameter $N_{UTRA_carrier}$ is the number of carriers in the neighbour frequency list. The UE shall filter CPICH Ec/Io and CPICH RSCP measurements of each measured UTRA FDD cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least half the minimum specified measurement period.

If the $S_{ServingCell}$ of the E-UTRA serving cell is greater than $S_{nonintrasearch}$ then the UE shall search for inter-RAT layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in TS 36.133 [4] clause 4.2.2 as $T_{higher_priority_search} = (60 * N_{layers})$ seconds, where the parameter N_{layers} is the total number of configured higher priority carrier frequencies.

If the $S_{ServingCell}$ of the E-UTRA serving cell is less than or equal to $S_{nonintrasearch}$ then the UE shall search for and measure inter-RAT layers of higher or lower priority in preparation for possible re-selection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority inter-RAT layers shall be the same as that defined below for lower priority RATs.

The UE shall evaluate whether newly detectable UTRA FDD cells have met the re-selection criteria in TS 36.304 [6] within time $N_{\text{UTRA_carrier}}$ * $T_{\text{detectUTRA_FDD}}$ (as defined in table 4.2.2.5.1-1 of TS 36.133 [4] clause 4.2.2.5.1) when the $S_{\text{ServingCell}}$ of the E-UTRA serving cell is less than $S_{\text{nonintrasearch}}$ when Treselection_{RAT} = 0 provided that the re-selection criteria is met by a margin of at least 6 dB.

Cells which have been detected shall be measured at least every $N_{UTRA_carrier} * T_{measureUTRA_FDD}$ when the $S_{ServingCell}$ of the E-UTRA serving cell is less than $S_{nonintrasearch}$.

When higher priority UTRA FDD cells are found by the higher priority search, they shall be measured at least every $T_{measureUTRA_FDD}$. If re-selection to any higher priority cell is not triggered within ($T_{evaluateUTRA_FDD}$ + Treselection_{RAT}) after it is found in a higher priority search, the UE is not required to continue making measurements of the cell to evaluate the ongoing possibility of re-selection.

For a cell that has been already detected, but that has not been re-selected to, the filtering shall be such that the UE shall be capable of evaluating that an already identified UTRA FDD cell has met re-selection criterion defined in TS 36.304 [6] within $N_{UTRA_carrier} * T_{evaluateUTRA_FDD}$ as defined in table 4.2.2.5-1 of TS 36.133 [4] clause 4.2.2.5 when Treselection_{RAT} = 0.

The normative reference for this requirement is TS 36.133 [4] clause 4.2.2.5.1 and A.4.3.1.

4.3.1.1.4 Test description

4.3.1.1.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise source to the UE antenna connectors as shown in TS 36.508 [7] Annex A Figure A.22.
- 2. The general test parameter settings are set up according to Table 4.3.1.1.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 4.3.1.1.4.3.
- 5. There is one E-UTRA FDD cell and one UTRA FDD cell specified in the test. Cell 1 is the cell used for registration according to TS 36.508 [7] clause 4.5.2A with the power level set according to Annex C.0 and C.1.

Table 4.3.1.1.4.1-1: General test parameters for E-UTRA FDD- higher priority UTRA FDD inter RAT cell re-selection test case

	Parameter	Unit	Value	Comment
Initial condition	Active cell		Cell 1	UE is on cell 1 in the initialisation phase, so that reselection to cell 2 occurs during T2
T2 end	Active cell		Cell 2	UE shall perform reselection to cell 2 during T2
condition	Neighbour cell		Cell 1	-
T3 end	Active cell		Cell 1	UE shall perform reselection to cell 1 during T3
condition	Neighbour cell		Cell 2	
E-UTRA PF	RACH configuration		4	As specified in table 5.7.1-2 in TS 36.211 [9]
E_UTRA A	ccess Barring	-	Not Sent	No additional delays in random access
Information				procedure.
DRX cycle	length	S	1.28	The value shall be used for all cells in the test.
T1		S	>20	During T1, cell 2 shall be powered off, and during the off time the primary scrambling code shall be changed, The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T2.
T2		s	85	T2 needs to be defined so that cell re-selection reaction time is taken into account
Т3		s	25	T3 needs to be defined so that cell re-selection reaction time is taken into account.

4.3.1.1.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. E-UTRA cell 1 is already identified by the UE prior to the start of the test. Before T1 the UE is camped on to cell 1. During T1, cell 2 shall be powered off, and during the off time the scrambling code shall be changed. At the start of T2 cell 2 becomes stronger than Thresh_{x_high}, the UE is expected to detect cell 2, send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on cell 2. At the start of T3 cell 2 becomes weaker than Thresh_{serving_low}, and the UE reselects to Cell 1.

- 1. Ensure the UE is in State 2A according to TS 36.508 [7] clause 4.5.2A.
- 2. Set the parameters according to duration T1 in Table 4.3.1.1.5-1 and 4.3.1.1.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. During T1, Cell 2 shall be powered off and the SS shall set Cell 2 primary scrambling code = ((current cell 2 primary scrambling code 50) mod 200 + 100).
- 4. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 4.3.1.1.5-1 and 4.3.1.1.5-2. The SS waits for random access requests information from the UE to perform cell re-selection procedure on the higher priority cell, Cell 2..
- 5. If the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message on Cell 2 within 81s from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

- 6. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 4.3.1.1.5-1 and 4.3.1.1.5-2.
- 7. The SS waits for random access requests information from the UE to perform cell re-selection procedure on the lower priority cell, Cell 1.
- 8. Repeat step 2-7 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

4.3.1.1.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 4.3.1.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information	Table H.2.3-1
blocks exceptions	Table H.2.3-2
Default RRC messages and information	Table H.3.2-1
elements contents exceptions	

The UTRA system information for inter-RAT frequency and priority information to be used during the initialisation phase is not defined in the message contents exceptions.

4.3.1.1.5 Test requirement

Tables 4.3.1.1.4-1, 4.3.1.1.5-1 and 4.3.1.1.5-2 define the primary level settings including test tolerances for cell reselection E-UTRA FDD to UTRA FDD test case (UTRA is of higher priority).

Table 4.3.1.1.5-1: Cell specific Test Parameters for Cell 1(E-UTRA FDD)

Parameter	Unit	Cell 1			
		T1	T2	Т3	
E-UTRA RF Channel			1		
number					
BW _{channel}	MHz		10		
OCNG Patterns defined in		(OP.2 FDD)	
A.3.2.1.1 (OP.2 FDD)					
PBCH_RA	dB				
PBCH_RB	dB				
PSS_RA	dB				
SSS_RA	dB				
PCFICH_RB	dB				
PHICH_RA	dB				
PHICH_RB	dB		0		
PDCCH_RA	dB				
PDCCH_RB	dB				
PDSCH_RA	dB				
PDSCH_RB	dB				
OCNG_RA ^{Note 1}	dB				
OCNG_RB ^{Note 1}	dB				
Qqualmin for UTRA	dB		-20		
neighbour cell	uБ		-20		
Qrxlevmin for UTRA	dBm		-115		
neighbour cell	UDIII		-113		
Qrxlevmin	dBm		-140		
N_{oc}	dBm/15 kHz		-98		
RSRP	dBm/15 KHz	-83.20 -83.20 -83.20			
\hat{E}_{s}/I_{ot}	dB	14.80 14.80 14.80			
\hat{E}_s/N_{oc}	dB	14.80 14.80 14.80			
Treselection _{EUTRAN}	S	0			
Snonintrasearch	dB	50			
Thresh _{x, high} (Note 2)	dB	40			
Propagation Condition		AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: This refers to the value of Thresh_{x, high} which is included in E-UTRA system information, and is a threshold for the UTRA target cell

Table 4.3.1.1.5-2: Cell specific test parameters for Cell 2 (higher priority UTRA FDD)

Parameter	Unit	Cell 2 (UTRA)				
		T1	T2	T3		
UTRA RF Channel Number		Channel 2				
CPICH_Ec/lor	dB		-10			
PCCPCH_Ec/lor	dB		-12			
SCH_Ec/lor	dB		-12			
PICH_Ec/lor	dB		-15			
OCNS_Ec/lor	dB		-0.941			
\hat{I}_{or}/I_{oc}	dB	- 80	11.90	-5.70		
I_{oc}	dBm/3,84 MHz		-70.10			
CPICH_Ec/lo	dB	- 8	-10.27	-16.74		
CPICH_RSCP	dBm	-∞	-68.20	-85.80		
Propagation Condition			AWGN			
Qqualmin	dB		-20			
Qrxlevmin	dBm		-115			
QrxlevminEUTRA	dBm		-140			
UE_TXPWR_MAX_RACH	dBm		21			
Treselection	S		0			
Sprioritysearch1	dB	62				
Sprioritysearch2	dB	0				
Thresh _{serving, low}	dB	36				
Thresh _{x, low} (Note 1)	dB		50	•		
Note 1: This refers to the value of Thresh _{x, low} which is included in						

Note 1: This refers to the value of Thresh_{x, low} which is included in UTRA system information, and is a threshold for the E-UTRA target cell.

The cell reselection delay to higher priority is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message on cell 2.

The cell re-selection delay to higher priority shall be less than 81 s.

NOTE: The cell re-selection delay to higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluateUTRA_FDD} + T_{SI-UTRA}$

Where:

 $T_{higher_priority_search}$ See section 4.4.2; 60s is assumed in this test case

T_{evaluateUTRA-FDD} See Table 4.2.2.5.1-1

 $T_{\text{SI-UTRA}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE

to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 80.48 s for higher priority cell search, allow 81 s for higher priority cell reselection in the test case.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

4.3.1.2 E-UTRAN FDD - UTRAN FDD cell re-selection: UTRA FDD is of lower priority

4.3.1.2.1 Test purpose

To verify that the UE is able to search and measure neighbouring UTRA FDD cells and compare to the E-UTRA serving cell to meet the inter-RAT cell re-selection requirements when the UTRA is of lower priority.

4.3.1.2.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward that support UTRA FDD.

4.3.1.2.3 Minimum conformance requirements

When the measurement rules indicate that UTRA FDD cells are to be measured, the UE shall measure CPICH Ec/Io and CPICH RSCP of detected UTRA FDD cells in the neighbour frequency list at the minimum measurement rate. The parameter $N_{UTRA_carrier_FDD}$ is the number of carriers in the neighbour frequency list. The UE shall filter CPICH Ec/Io and CPICH RSCP measurements of each measured UTRA FDD cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least half the minimum specified measurement period.

If the $S_{ServingCell}$ of the E-UTRA serving cell is greater than $S_{nonintrasearch}$ then the UE shall search for inter-RAT layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in TS 36.133 [4] clause 4.2.2 as $T_{higher_priority_search} = (60 * N_{layers})$ seconds, where the parameter N_{layers} is the total number of configured higher priority carrier frequencies.

If the $S_{ServingCell}$ of the E-UTRA serving cell is less than or equal to $S_{nonintrasearch}$ then the UE shall search for and measure inter-RAT layers of higher or lower priority in preparation for possible re-selection. In this scenario, the minimum rate at which the UE is required to search for and measure such layers is not reduced and shall be the same as that defined below for lower priority RATs.

The UE shall evaluate whether newly detectable UTRA FDD cells have met the re-selection criteria in TS 36.304 [6] within time $N_{UTRA_carrier_FDD} * T_{detectUTRA_FDD}$ (as defined in table 4.2.2.5.2-1 of TS 36.133 [4] clause 4.2.2.5.2) when the $S_{ServingCell}$ of the E-UTRA serving cell (or other cells on the same frequency layer) is greater than $S_{nonintrasearch}$ when Treselection $C_{RAT} = 0$ provided that the re-selection criteria is met by a margin of at least [6 dB].

Cells which have been detected shall be measured at least every $N_{UTRA_carrier} * T_{measureUTRA_FDD}$ when the $S_{ServingCell}$ of the E-UTRA serving cell (or other cells o the same frequency layer) is less than $S_{nonintrasearch}$.

When higher priority UTRA FDD cells are found by the higher priority search, they shall be measured at least every $T_{measureUTRA_FDD}$. If re-selection to any higher priority cell is not triggered within ($T_{evaluateUTRA_FDD}$ + Treselection_{RAT}) after it is found in a higher priority search, the UE is not required to continue making measurements of the cell to evaluate the ongoing possibility of re-selection.

For a cell that has been already detected, but that has not been re-selected to, the filtering shall be such that the UE shall be capable of evaluating that an already identified UTRA FDD cell has met re-selection criterion defined in TS 36.304 [6] within $N_{\text{UTRA_carrier}} * T_{\text{evaluateUTRA_FDD}}$ as defined in table 4.2.2.5.2-1 of TS 36.133 [4] clause 4.2.2.5.2 when Treselection_{RAT} = 0.

The normative reference for this requirement is TS 36.133 [4] clause 4.2.2.5.2 and A.4.3.1.

4.3.1.2.4 Test description

4.3.1.2.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise source to the UE antenna connectors as shown in TS 36.508 [7] Annex A Figure A.22.
- 2. The general test parameter settings are set up according to Table 4.3.1.2.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 4.3.1.2.4.3.
- 5. There is one E-UTRA FDD cell and one UTRA FDD cell specified in the test. Cell 1 is the cell used for registration according to TS 36.508 [7] clause 4.5.2A with the power level set according to Annex C.0 and C.1.

Table 4.3.1.2.4.1-1: General test parameters for EUTRA FDD- lower priority UTRA FDD inter RAT cell re-selection test case

	Parameter	Unit	Value	Comment
Initial condition	Active cell		Cell1	E-UTRAN cell
T1 end condition	Active cells		Cell1	UE shall perform reselection to cell 1 during T1 for subsequent iterations of the test
	Neighbour cell		Cell2	
T2 end	Active cell		Cell2	UE shall perform reselection to cell 2 during T2
condition	Neighbour cell		Cell1	
E-UTRA PF	RACH configuration		4	As specified in table 5.7.1-2 in TS 36.211 [9]
E_UTRA A	ccess Barring	-	Not Sent	No additional delays in random access
Information				procedure.
DRX cycle	length	S	1.28	The value shall be used for all cells in the test.
T1		S	85	T1 need to be defined so that cell re-selection
				reaction time is taken into account.
T2		S	25	T2 need to be defined so that cell re-selection
				reaction time is taken into account.

4.3.1.2.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The UE is requested to monitor the neighbouring cell on one UTRA FDD carrier. In the test there are two successive time periods, with time duration of T1 and T2 respectively. Both Cell 1 and Cell 2 are already identified by the UE prior to the start of the test. At T1 the UE is camped on to Cell 1. Cell 2 is of lower priority than Cell 1. Cell 1 and Cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing Cell 2.

- 1. Ensure the UE is in State 2A according to TS 36.508 [7] clause 4.5.2A.
- 2. Set the parameters according to T1 in Table 4.3.1.2.5-1 and 4.3.1.2.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 4.3.1.2.5-1 and 4.3.1.2.5-2.
- 4. The SS waits for random access requests information from the UE to perform cell re-selection on Cell 2.
- 5. If the UE responds on Cell 2 during time duration T2 within 21 seconds from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 6. Repeat step 2-5 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

4.3.1.2.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 4.3.1.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information	Table H.2.3-5
blocks exceptions	Table H.2.3-6
Default RRC messages and information	Table H.3.2-1
elements contents exceptions	

The UTRA system information for inter-RAT frequency and priority information to be used during the initialisation phase is not defined in the message contents exceptions.

4.3.1.2.5 Test requirement

Tables 4.3.1.2.4.1-1, 4.3.1.2.5-1 and 4.3.1.2.5-2 define the primary level settings including test tolerances for E-UTRAN FDD- UTRAN FDD intra frequency cell re-selection test case which UTRA is of lower priority.

Table 4.3.1.2.5-1: Cell specific test parameters for cell 1 (E-UTRA)

Parameter	Unit	Cell 1				
		T1	T2			
E-UTRA RF Channel			1			
number						
BW _{channel}	MHz		10			
OCNG Patterns defined in		OF	P.2 FDD			
A.3.2.1.1 (OP.2 FDD)						
PBCH_RA	dB					
PBCH_RB	dB					
PSS_RA	dB					
SSS_RA	dB					
PCFICH_RB	dB					
PHICH_RA	dB					
PHICH_RB	dB		0			
PDCCH_RA	dB					
PDCCH_RB	dB					
PDSCH_RA	dB					
PDSCH_RB	dB					
OCNG_RA ^{Note 1}	dB					
OCNG_RB ^{Note 1}	dB					
Qqualmin for UTRA	dB		-20			
neighbour cell	d b		20			
Qrxlevmin for UTRA	dBm		-115			
neighbour cell						
Qrxlevmin	dBm		-140			
N_{oc}	dBm/15 kHz	-	99.10			
RSRP	dBm/15 KHz	-85.20	-102.80			
\hat{E}_s/I_{ot}	dB	13.90 -3.70				
\hat{E}_s/N_{oc}	dB	13.90	-3.70			
Treselection _{EUTRAN}	S	0				
Snonintrasearch	dB	Not sent				
Thresh _{serving, low}	dB	44				
Thresh _{x, low} (Note 2)	dB	42				
Propagation Condition		AWGN				
Note 1: OCNC shall be used such that both calls are fully allocated						

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: This refers to the value of Thresh_{x, low} which is included in E-UTRA system information, and is a threshold for the UTRA

target cell.

Table 4.3.1.2.5-2: Cell specific test parameters for Cell 2(Lower priority UTRA FDD)

Parameter	Unit	Cell 2 (UTRA)		
		T1	T2	
UTRA RF Channel Number		Chan	nel 2	
CPICH_Ec/lor	dB	-1	0	
PCCPCH_Ec/lor	dB	-1	2	
SCH_Ec/lor	dB	-1	2	
PICH_Ec/lor	dB	-1	5	
OCNS_Ec/lor	dB	-0.9	941	
$ \hat{I}_{or}/I_{oc} $	dB	13.80	13.80	
I_{oc}	dBm/3,84 MHz	-70		
CPICH_Ec/lo	dB	-10. 18	-10. 18	
CPICH_RSCP	dBm	-66.20	-66.20	
Propagation Condition		AW	GN	
Qqualmin	dB	-2	0	
Qrxlevmin	dBm	-11	15	
QrxlevminEUTRA	dBm	-14	40	
UE_TXPWR_MAX_RACH	dBm	2	1	
Treselection	S	C)	
Sprioritysearch1	dB	4:	2	
Sprioritysearch2	dB	0		
Thresh _{x, high} (Note 1)	dB	4	8	
Note 1. This refere to the value of Threeh which is included				

Note 1: This refers to the value of Thresh_{x, high} which is included in UTRA system information, and is a threshold for the E-UTRA target cell.

The cell reselection delay to lower priority is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message on cell 2.

The cell re-selection delay to lower priority test requirement in this case is expressed as:

 $Cell \ re-selection \ delay \ to \ lower \ priority = T_{evaluateUTRA_FDD} + T_{SI\text{-}EUTRA}$

 $T_{\text{evaluateUTRA FDD}} = 19.2 \text{ s}$; as specified in TS 36.133 [4] clause 4.2.2.5

 $T_{SI-EUTRA} = 1280 \text{ ms}$; as specified in TS 36.133 [4] clause 4.2.2.4

The cell re-selection delay to lower priority shall be less than a total of 21 seconds in this test case (note: this gives a total of 20.48 seconds but the test allows 21 seconds).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

4.3.1.3 E-UTRAN FDD - UTRAN FDD cell re-selection in fading propagation conditions: UTRA FDD is of lower priority

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined.

4.3.1.3.1 Test purpose

To verify that the UE is able to search and measure neighbouring UTRA FDD cells and compare to the E-UTRA serving cell to meet the inter-RAT cell re-selection requirements when the UTRA is of lower priority. The E-UTRA cell is in fading propagation conditions and the UTRA cell is in AWGN propagation conditions.

4.3.1.3.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward that support UTRA FDD.

4.3.1.3.3 Minimum conformance requirements

When the measurement rules indicate that UTRA FDD cells are to be measured, the UE shall measure CPICH Ec/Io and CPICH RSCP of detected UTRA FDD cells in the neighbour frequency list at the minimum measurement rate. The parameter $N_{UTRA_carrier_FDD}$ is the number of carriers in the neighbour frequency list. The UE shall filter CPICH Ec/Io and CPICH RSCP measurements of each measured UTRA FDD cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least half the minimum specified measurement period.

If the $S_{ServingCell}$ of the E-UTRA serving cell is greater than $S_{nonintrasearch}$ then the UE shall search for inter-RAT layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in TS 36.133 [4] clause 4.2.2 as $T_{higher_priority_search} = (60 * N_{layers})$ seconds, where the parameters N_{layers} is the total number of configured higher priority carrier frequencies.

If the $S_{ServingCell}$ of the E-UTRA serving cell is less than or equal to $S_{nonintrasearch}$ then the UE shall search for and measure inter-RAT layers of higher or lower priority in preparation for possible re-selection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority inter-RAT layers shall be the same as that defined below for lower priority RATs.

The UE shall evaluate whether newly detectable UTRA FDD cells have met the re-selection criteria in TS 36.304 [6] within time $N_{UTRA_carrier_FDD} * T_{detectUTRA_FDD}$ (as defined in table 4.2.2.5.2-1 of TS 36.133 [4] clause 4.2.2.5.2) when the $S_{ServingCell}$ of the E-UTRA serving cell is greater than $S_{nonintrasearch}$ when Treselection_{RAT} = 0 provided that the re-selection criteria is met by a margin of at least 6 dB.

Cells which have been detected shall be measured at least every $N_{UTRA_carrier} * T_{measureUTRA_FDD}$ when the $S_{ServingCell}$ of the E-UTRA serving cell is less than $S_{nonintrasearch}$.

When higher priority UTRA FDD cells are found by the higher priority search, they shall be measured at least every $T_{measureUTRA_FDD}$. If re-selection to any higher priority cell is not triggered within ($T_{evaluateUTRA_FDD}$ + Treselection_{RAT}) after it is found in a higher priority search, the UE is not required to continue making measurements of the cell to evaluate the ongoing possibility of re-selection.

For a cell that has been already detected, but that has not been re-selected to, the filtering shall be such that the UE shall be capable of evaluating that an already identified UTRA FDD cell has met re-selection criterion defined in TS 36.304 [6] within $N_{\text{UTRA_carrier}} * T_{\text{evaluateUTRA_FDD}}$ as defined in table 4.2.2.5.2-1 of TS 36.133 [4] clause 4.2.2.5.2 when Treselection_{RAT} = 0.

The normative reference for this requirement is TS 36.133 [4] clause 4.2.2.5.2 and A.4.3.1.3.

4.3.1.3.4 Test description

4.3.1.3.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and faders and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.26.
- 2. The general test parameter settings are set up according to Table 4.3.1.3.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 4.3.1.3.4.3.
- 5. There is one E-UTRA FDD cell and one UTRA FDD cell specified in the test. Cell 1 is the cell used for registration according to TS 36.508 [7] clause 4.5.2A with the power level set according to Annex C.0 and C.1.

Table 4.3.1.3.4.1-1: General test parameters for EUTRA FDD- lower priority UTRA FDD inter RAT cell re-selection test case in fading conditions

	Parameter	Unit	Value	Comment
Initial condition	Active cell		Cell1	E-UTRAN Cell.
T1 end condition	Active cells		Cell1	UE shall perform reselection to cell 1 during T1 for subsequent iterations of the test.
	Neighbour cell		Cell2	
T3 end	Active cell		Cell2	UE shall perform reselection to cell 2 during T3
condition	Neighbour cell		Cell1	
E-UTRA P	RACH configuration		4	As specified in table 5.7.1-2 in TS 36.211 [9]
E_UTRA A Information	ccess Barring	-	Not Sent	No additional delays in random access procedure.
DRX cycle	length	S	1.28	The value shall be used for all cells in the test.
T1		S	<85	T1 need to be defined so that cell re-selection reaction time is taken into account. T1 is terminated when the UE starts to send preambles to cell 1
T2		S	64	The start of T2 is defined as the time when the UE starts to send PRACH preambles to cell 1
ТЗ		S	<25	T3 need to be defined so that cell re-selection reaction time is taken into account. T3 is terminated when the UE starts to send preambles to cell 2
T4		S	64	The start of T4 is defined as the time when the UE starts to send PRACH preambles to cell 2

4.3.1.3.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The UE is requested to monitor the neighbouring cell on one UTRA FDD carrier. In the test there are four successive time periods, with time duration of T1, T2, T3 and T4 respectively. Both Cell 1 and Cell 2 are already identified by the UE prior to the start of the test. At T1 the UE is camped on to Cell 1. Cell 2 is of lower priority than Cell 1. Cell 1 and Cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing Cell 2. Time duration T2 and T4 are not used for cell re-selection in the test.

- 1. Ensure the UE is in State 2A according to TS 36.508 [7] clause 4.5.2A.
- 2. Set the parameters according to T2 in Table 4.3.1.3.5-1 and 4.3.1.3.5-2. Propagation conditions are set according to Annex B clause B.1.1 and B.2.2. T2 starts.
- 3. If the UE perform cell re-selection to Cell2 during T2, then the number of unsuccessful test is increased by one as the low probability of cell re-selection in T2. And skip to step 7.
- 4 When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 4.3.1.3.5-1 and 4.3.1.3.5-2.
- 5. The SS waits for random access requests information from the UE to perform cell re-selection on Cell 2.
- 6. If the UE responds on Cell 2 during time duration T3 within 21 seconds from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 7. When cell re-selection procedure completes, the SS shall switch the power setting from T3 to T4 as specified in Table 4.3.1.3.5-1 and 4.3.1.3.5-2.
- 8. If the UE perform cell Re-selection to Cell1 during T4, then the number of unsuccessful test is increased by one as the low probability of Cell Re-selection in T4. And skip to step 2.
- 9. When T4 expires, the SS shall switch the power setting from T4 to T1 as specified in Table 4.3.1.3.5-1 and 4.3.1.3.5-2.

- 10. The SS waits for random access requests information from the UE to perform cell re-selection on Cell 1.
- 11. When T1 expires, repeat step 2-10 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved and fulfil the requirements of the probability of re-selection on Step3 and Step 8 to be less than 10%. If the UE doesn't respond on Cell 1 during time duration T1, the UE is switched off and then on and return to step 1

4.3.1.3.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 4.3.1.3.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information	
blocks exceptions	Table H.2.3-5
•	Table H.2.3-6
Default RRC messages and information	Table H.3.2-1
elements contents exceptions	

The UTRA system information for inter-RAT frequency and priority information to be used during the initialisation phase is not defined in the message contents exceptions.

4.3.1.3.5 Test requirement

Tables 4.3.1.3.4.1-1, 4.3.1.3.5-1 and 4.3.1.3.5-2 define the primary level settings including test tolerances for E-UTRAN FDD- UTRAN FDD intra frequency cell re-selection test case which UTRA is of lower priority.

Table 4.3.1.3.5-1: Cell specific test parameters for cell 1 (E-UTRA)

Parameter	Unit	Cell 1				
		T1	T2	T3	T4	
E-UTRA RF Channel				1		
number						
BW _{channel}	MHz			10		
OCNG Patterns defined in			OP	.2 FDD		
A.3.2.1.1 (OP.2 FDD)						
PSS_RA	dB			0		
SSS_RA	dB			0		
PCFICH_RB	dB			0		
PHICH_RA	dB			0		
PHICH_RB	dB			0		
PDCCH_RA	dB			0		
PDCCH_RB	dB			0		
PDSCH_RA	dB	0				
PDSCH_RB	dB			0		
OCNG_RA ^{Note 1}	dB			0		
OCNG_RB ^{Note 1}	dB			0		
Qqualmin for UTRA	dB	-20				
neighbour cell	QD.			20		
Qrxlevmin for UTRA	dBm			-115		
neighbour cell						
Qrxlevmin	dBm			-140		
N_{oc}	dBm/15 kHz		-	-104		
RSRP	dBm/15 KHz	-82 + TT			-107 + TT	
\hat{E}_{s}/I_{ot}	dB	22 + TT		-3 + TT	-3 + TT	
\hat{E}_s/N_{oc}	dB	22 + TT	22 + TT	-3 + TT	-3 + TT	
Treselection _{EUTRAN}	S	0				
Snonintrasearch	dB	Not sent				
Thresh _{serving, low}	dB	44				
Thresh _{x, low} (Note 2)	dB	42				
Propagation Condition		ETU70				

OCNG shall be used such that both cells are fully allocated and a constant total t spectral density is achieved for all OFDM symbols.

This refers to the value of Thresh_{x, low} which is included in E-UTRA system inform Note 1:

Note 2: threshold for the UTRA target cell.

Table 4.3.1.3.5-2: Cell specific test parameters for Cell 2(Lower priority UTRA FDD)

Parameter	Unit	Cell 2 (UTRA)				
		T1	T2	T3	T4	
UTRA RF Channel Number		Channel 2				
CPICH_Ec/lor	dB			-10		
PCCPCH_Ec/lor	dB			-12		
SCH_Ec/lor	dB			-12		
PICH_Ec/lor	dB			-15		
OCNS_Ec/lor	dB		-(0.941		
\hat{I}_{or}/I_{oc}	dB	13 + TT	13 + TT	13 + TT	13 + TT	
I_{oc}	dBm/3,84 MHz	-70				
CPICH_Ec/lo	dB	-10.21 + TT	-10.21 + TT	-10.21 + TT	-10.21 + TT	
CPICH_RSCP	dBm	-67 + TT	-67 + TT	-67 + TT	-67 + TT	
Propagation Condition		AWGN				
Qqualmin	dB			-20		
Qrxlevmin	dBm			-115		
QrxlevminEUTRA	dBm			-140		
UE_TXPWR_MAX_RACH	dBm	21				
Treselection	S	0				
Sprioritysearch1	dB	42				
Sprioritysearch2	dB	0				
Thresh _{x, high} (Note 1)	dB	44				
Note 1: This refers to the value of Thresh _{x, high} which is included in UTRA system						

information, and is a threshold for the E-UTRA target cell

The probability of re-selection from Cell 1 to Cell 2 during T2 observed during testing shall be less than 10%.

The probability of re-selection from Cell 2 to Cell 1 during T4 observed during testing shall be less than 10%.

The cell reselection delay to lower priority is defined as the time from the beginning of time period T3, to the moment when the UE camps on Cell 2 and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUST message on Cell 2. In order to evaluate re-selection delay, the SS first needs to verify that the UE is camped on Cell 1 at the start of T3.

The cell re-selection delay to lower priority test requirement in this case is expressed as:

Cell re-selection delay to lower priority = $T_{evaluateUTRA_FDD} + T_{SI-EUTRA}$

 $T_{evaluateUTRA\ FDD} = 19.2\ s$; as specified in TS 36.133 [4] clause 4.2.2.5

 $T_{SI-EUTRA} = 1280 \text{ ms}$; as specified in TS 36.133 [4] clause 4.2.2.4

The cell re-selection delay to lower priority shall be less than a total of 21 seconds in this test case (note: this gives a total of 20.48 seconds but the test allows 21 seconds).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

4.3.2 E-UTRAN FDD - UTRAN TDD cell re-selection

4.3.2.1 Test purpose

To verify that the UE is able to search and measure neighbouring UTRAN TDD cells and compare to the E-UTRA serving cell to meet the inter-RAT cell re-selection requirements when the UTRA cell is of lower priority.

4.3.2.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward that support UTRAN TDD.

4.3.2.3 Minimum conformance requirements

4.3.2.3.1 3.84Mcps TDD option

There are no requirements so this is not tested.

4.3.2.3.2 1.28Mcps TDD option

When the measurement rules indicate that UTRA TDD cells are to be measured, the UE shall measure P-CCPCH RSCP of detected UTRA TDD cells in the neighbour frequency list at the minimum measurement rate specified in this section. The parameter $N_{UTRA_carrier_TDD}$ is the number of carriers in the neighbour frequency list. The UE shall filter P-CCPCH RSCP measurements of each measured UTRA TDD cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least half the minimum specified measurement period. P-CCPCH RSCP of UTRAN TDD cells shall not be filtered over a longer period than that specified in TS 36.133 [4] table 4.2.2.5.2-1.

If the $S_{ServingCell}$ of the E-UTRA serving cell is greater than $S_{nonintrasearch}$ then the UE shall search for inter-RAT layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in section 36.133[4] clauses 4.2.2.

If the $S_{ServingCell}$ of the E-UTRA serving cell is less than or equal to $S_{nonintrasearch}$ then the UE shall search for and measure inter-RAT layers of higher, equal or lower priority in preparation for possible reselection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority inter-RAT layers shall be the same as that defined below for lower priority RATs.

The UE shall evaluate whether newly detectable UTRA TDD cells have met the reselection criteria in TS 36.304 within time ($N_{UTRA_carrier_TDD}$) * $T_{detectUTRA_TDD}$ when the $S_{ServingCell}$ of the E-UTRA serving cell (or other cells on the same frequency layer) is less than $S_{nonintrasearch}$ when $T_{reselection} = 0$ provided that the reselection criteria is met by a margin of at least 6dB.

Cells which have been detected shall be measured at least every $(N_{UTRA_carrier_TDD}) * T_{measureUTRA_TDD}$ when the $S_{ServingCell}$ of the E-UTRA serving cell is less than $S_{nonintrasearch}$.

When higher priority UTRA TDD cells are found by the higher priority search, they shall be measured at least every $T_{measure,UTRA_TDD}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this section shall still be met by the UE before it makes any determination that it may stop measuring the cell.

For a cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that an already identified UTRA TDD cell has met reselection criterion defined in TS 36.304[6] within $N_{UTRA_carrier_TDD}$ * $T_{evaluateUTRA_TDD}$ when $T_{reselection} = 0$ provided that the reselection criteria is met by a margin of at least 6 dB.

The normative reference for this requirement is TS 36.133 [4] clause 4.2.2.5.2 and A.4.3.2.

4.3.2.3.3 7.68Mcps TDD option

There are no requirements so this is not tested.

4.3.2.4 Test description

4.3.2.4.1 3.84Mcps TDD option

There are no requirements so this is not tested.

4.3.2.4.2 1.28Mcps TDD option

4.3.2.4.2.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.22.
- 2. The general test parameter settings are set up according to Table 4.3.2.4.2.1-1.
- 3. Propagation conditions are set according to Annex B clause B. 0.
- 4. Message contents are as defined in clause 4.3.2.4.2.3.
- 5. There is one E-UTRA FDD cell and one UTRA TDD cell specified in the test. Cell 2 (UTRA TDD cell) is the cell used for registration with the power level set according to T2 in table 4.3.2.5.2-2.

Table 4.3.2.4.2.1-1: General test parameters for E-UTRA FDD to UTRA (1.28 Mcps TDD OPTION) Cell Re-selection

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell 1	E-UTRA FDD cell
T1 end condition	Active cell		Cell1	UE shall perform reselection to cell 1 during T1 for subsequent iterations of the test.
	Neighbour cell		Cell2	1.28 Mcps TDD OPTION cell
T2 end	Active cell		Cell2	UE shall perform reselection to cell 2 during T2
condition	Neighbour cell		Cell1	E-UTRA FDD cell
CP length of o	cell 1		normal	
E-UTRA PRA	CH		4	As specified in table 5.7.1-2 in TS 36.211
configuration				
Time offset be	etween cells		3 ms	Asynchronous cells 3ms or 92160*Ts
Access Barrin	g Information	-	Not sent	No additional delays in random access procedure.
Treselection		S	0	
DRX cycle ler	ngth	S	1,28	
HCS			Not	
			used	
T1		S	85	T1 need to be defined so that cell re-selection reaction time is taken into account.
T2		S	25	takon into docodnit.

4.3.2.4.2.2 Test procedure

The test consists of one active cell and one neighbour cell. In the test there are two successive time periods, with time duration of T1 and T2 respectively. Both Cell 1 and Cell 2 are already identified by the UE prior to the test. Cell 1 and Cell 2 belong to different tracking areas. The UTRA TDD layer is configured at a lower priority than the E-UTRA FDD layer.

The ranking of the cells shall be made according to the cell reselection criteria specified in TS 36.304.

- 1. Ensure the UE is in State 2A according to TS 36.508 [7] clause 4.5.2A.
- 2. Set the parameters according to T1 in Table 4.3.2.5.2-1 and 4.3.2.5.2-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. The SS waits for random access requests information from the UE to perform cell re-selection on the higher priority cell, Cell 1.
- 4. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 4.3.2.5.2-1 and 4.3.2.5.2-2.
- 5. The SS waits for random access requests information from the UE to perform cell re-selection on the lower priority cell, Cell 2.

- 6. If the UE responds on lower priority cell, Cell 2 during time duration T2 within 21 seconds from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 7. Repeat step 1-6 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved

4.3.2.4.2.3 Message contents

Message contents are according TS 36.508 [7] clause 4.6 with the following exceptions:

Table 4.3.2.4.2.3-1: Common Exception messages

Default Message Contents					
Common contents of system information	Table H.2.3-7				
blocks exceptions	Table H.2.3-8				
Default RRC messages and information	Table H.3.2-1				
elements contents exceptions					

The UTRA system information for inter-RAT frequency and priority information to be used during the initialisation phase is not defined in the message contents exceptions.

4.3.2.4.3 7.68 Mcps TDD option

There are no requirements so this is not tested.

4.3.2.5 Test requirement

4.3.2.5.1 3.84Mcps TDD option

There are no requirements so this is not tested.

4.3.2.5.2 1.28Mcps TDD option

Tables 4.3.2.4.2-1, 4.3.2.5.2-1 and 4.3.2.5.2-2 defines the primary level settings including test tolerances for E-UTRAN FDD to UTRA TDD cell re-selection test case.

Table 4.3.2.5.2-1: Cell specific test parameters for cell re-selection E-UTRA FDD to UTRA TDD test case (cell 1)

Parameter	Unit	Cell 1			
		T1	T2		
E-UTRA RF Channel		1			
Number					
BW _{channel}	MHz	1	0		
PBCH_RA	dB				
PBCH_RB	dB				
PSS_RB	dB				
SSS_RB	dB				
PCFICH_PA	dB				
PHICH_PA	dB				
PHICH_PB	dB	0	0		
PDCCH_PA	dB				
PDCCH_PB	dB				
PDSCH_PA	dB				
PDSCH_PB	dB				
OCNG_RA ^{Note1}	dB				
OCNG_RB ^{Note1}	dB				
Q _{rxlevmin}	dBm/15kHz	-140	-140		
N_{oc}	dBm/15kHz	-6	98		
RSRP	dBm/15kHz	-87	-101		
\hat{E}_{s}/I_{ot}	dB	11	-3		
Snonintrasearch	dB	Not sent			
Thresh _{serving, low}	dB	46 (-94dBm)			
Thresh _{x, low} (Note2)	dB	24 (-79dBm)			
Propagation Condition		ÀWGN			
Note 1: OCNG shall be used such that cell is fully allocated and a					

Note 1: OCNG shall be used such that cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: This refers to the value of Threshx, low which is included in E-UTRA system information, and is a threshold for the UTRA TDD target cell.

Table 4.3.2.5.2-2: Cell specific test parameters for cell re-selection E-UTRA FDD to UTRA TDD test case (cell 2)

Parameter	Unit	Cell 2 (UTRA)			
Timeslot Number		0		DwPTS	
		T1	T2	T1	T2
UTRA RF Channel Number (Note1)		Channel 2			
PCCPCH_Ec/lor	dB	-3	-3		
DwPCH_Ec/lor	dB			0	0
OCNS_Ec/lor	dB	-3	-3		
\hat{I}_{or}/I_{oc}	dB	11	11	11	11
I_{oc}	dBm/1.28 MHz	-80			
PCCPCH RSCP	dBm	-72	-72	n.a.	n.a.
Propagation Condition		AWGN			
Q _{rxlevmin}	dBm	-103			
Qoffset1 _{s,n}	dB	C1, C2: 0			
Qhyst1 _s	dB	0			
Thresh _{x, high} (Note2)	dB	46 (-94dBm)			

Note1: In the case of multi-frequency cell, the UTRA RF Channel Number is the primary frequency's channel number.

Note 2: This refers to the value of Thresh_{x, high} which is included in UTRA system information, and is a threshold for the E-UTRA target cell.

The cell reselection delay to lower priority is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send the SYNCH-UL sequence in the UpPTS for sending the RRC CONNECTION REQUEST message on cell 2.

The cell re-selection delay to lower priority shall be less than 21 s.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

NOTE: The cell re-selection delay to lower priority cell can be expressed as: $T_{evaluateUTRA_TDD} + T_{SI-UTRA}$

Where:

 $T_{evaluateUTRA\ TDD}$ 19.2s, as specified in TS 36.133 [4] table 4.2.2.5.2-1

T_{SI-UTRA} Maximum repetition period of relevant system info blocks that needs to be received by the UE

to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 20.48 s, allow 21 s for lower priority cell reselection in the test case.

4.3.2.5.3 7.68 Mcps TDD option

There are no requirements so this is not tested.

4.3.3 E-UTRAN TDD - UTRAN FDD cell re-selection

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined.
- Statistical testing of cell re-selection delay performance requirements are undefined

4.3.3.1 Test purpose

To verify that the UE is able to search and measure neighbouring UTRA FDD cells and compare to the E-UTRA serving cell to meet the inter-RAT cell re-selection requirements when the UTRA is of lower priority.

4.3.3.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward that support UTRA FDD.

4.3.3.3 Minimum conformance requirements

When the measurement rules indicate that UTRA FDD cells are to be measured, the UE shall measure CPICH Ec/Io and CPICH RSCP of detected UTRA FDD cells in the neighbour frequency list at the minimum measurement rate. The parameter $N_{UTRA_carrier_FDD}$ is the number of carriers in the neighbour frequency list. The UE shall filter CPICH Ec/Io and CPICH RSCP measurements of each measured UTRA FDD cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least half the minimum specified measurement period.

If the $S_{ServingCell}$ of the E-UTRA serving cell is greater than $S_{nonintrasearch}$ then the UE shall search for inter-RAT layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in TS 36.133 [4] clause 4.2.2 as $T_{higher_priority_search} = (60 * N_{layers})$ seconds, where the parameter N_{layers} is the total number of configured higher priority carrier frequencies.

If the $S_{ServingCell}$ of the E-UTRA serving cell is less than or equal to $S_{nonintrasearch}$ then the UE shall search for and measure inter-RAT layers of higher or lower priority in preparation for possible re-selection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority inter-RAT layers shall be the same as that defined below for lower priority RATs.

The UE shall evaluate whether newly detectable UTRA FDD cells have met the re-selection criteria in TS 36.304 [6] within time $N_{UTRA_carrier_FDD} * T_{detectUTRA_FDD}$ (as defined in table 4.2.2.5.1-1 of TS 36.133 [4] clause 4.2.2.5.1) when the

 $S_{ServingCell}$ of the E-UTRA serving cell is greater than $S_{nonintrasearch}$ when Treselection_{RAT} = 0 provided that the re-selection criteria is met by a margin of at least 6 dB.

Cells which have been detected shall be measured at least every $N_{UTRA_carrier} * T_{measureUTRA_FDD}$ when the $S_{ServingCell}$ of the E-UTRA serving cell is less than $S_{nonintrasearch}$.

When higher priority UTRA FDD cells are found by the higher priority search, they shall be measured at least every $T_{measureUTRA_FDD}$. If re-selection to any higher priority cell is not triggered within ($T_{evaluateUTRA_FDD}$ + Treselection_{RAT}) after it is found in a higher priority search, the UE is not required to continue making measurements of the cell to evaluate the ongoing possibility of re-selection.

For a cell that has been already detected, but that has not been re-selected to, the filtering shall be such that the UE shall be capable of evaluating that an already identified UTRA FDD cell has met re-selection criterion defined in TS 36.304 [6] within $N_{UTRA_carrier} * T_{evaluateUTRA_FDD}$ as defined in table 4.2.2.5.1-1 of TS 36.133 [4] clause 4.2.2.5.1 when Treselection_{RAT} = 0.

The normative reference for this requirement is TS 36.133 [4] clause 4.2.2.5.1 and A.4.3.3.

4.3.3.4 Test description

4.3.3.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise source to the UE antenna connectors as shown in TS 36.508 [7] Annex A Figure A.22.
- 2. The general test parameter settings are set up according to Table 4.3.3.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 4.3.3.4.3.
- 5. There is one E-UTRA TDD cell and one UTRA FDD cell specified in the test. Cell 2 (UTRA FDD cell) is the cell used for registration with the power level set according to Annex C.0 and C.1 for this test.

Table 4.3.3.4.1-1: General test parameters for EUTRA TDD- lower priority UTRA FDD inter RAT cell reselection test case

	Parameter	Unit	Value	Comment
Initial condition	Active cell		Cell2	UE shall be forced to cell 2 in the initialisation phase, so that reselection to cell 1 occurs during the first T1 phase
T1 end	Active cells		Cell1	UE shall perform reselection to cell 1 during T1
condition	Neighbour cell		Cell2	
T2 end	Active cell		Cell2	UE shall perform reselection to cell 2 during T2
condition	Neighbour cell		Cell1	
E-UTRA	PRACH configuration		53	As specified in table 5.7.1-2 in TS 36.211
Uplink-do	wnlink configuration of cell 1		1	As specified in table 4.2.2 in TS 36.211
Special su	bframe configuration of cell 1		6	As specified in table 4.2.1 in TS 36.211
E_UT	E_UTRA Access Barring Information		Not Sent	No additional delays in random access procedure.
DI	RX cycle length	S	1.28	The value shall be used for all cells in the test.
	T1	S	85	T1 need to be defined so that cell re-selection reaction time is taken into account.
T2		S	25	T2 need to be defined so that cell re-selection reaction time is taken into account.

4.3.3.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The UE is requested to monitor the neighbouring cell on one UTRA FDD carrier. In the test there are two successive time periods, with time duration of T1 and T2 respectively. Both Cell 1 and Cell 2 are already identified by the UE prior to the start of the test. Cell 2 is of lower priority than Cell 1.

- 1. Ensure the UE is in State 2A according to TS 36.508 [7] clause 4.5.2A.
- 2. Set the parameters according to T1 in Table 4.3.3.5-1 and 4.3.3.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 4.3.3.5-1 and 4.3.3.5-2.
- 4. The SS waits for random access requests information from the UE to perform cell re-selection on Cell 2.
- 5. If the UE responds on Cell 2 during time duration T2 within 21 seconds from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one
- 6. Repeat step 1-5 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

4.3.3.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 4.3.3.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information	Table H.2.3-5
blocks exceptions	Table H.2.3-6
Default RRC messages and information	Table H.3.2-2
elements contents exceptions	

The UTRA system information for inter-RAT frequency and priority information to be used during the initialisation phase is not defined in the message contents exceptions.

4.3.3.5 Test requirement

Tables 4.3.3.4.1-1, 4.3.3.5-1 and 4.3.3.5-2 define the primary level settings including test tolerances for E-UTRAN TDD- UTRAN FDD intra frequency cell re-selection test case which UTRA is of lower priority.

Table 4.3.3.5-1: Cell specific test parameters for Cell 1(E-UTRA TDD)

Parameter	Unit	Cell 1		
		T1 T2		
E-UTRA RF Channel		1		
number				
BW _{channel}	MHz		10	
OCNG Patterns defined in		OF	P.2 TDD	
D.2.1 (OP.2 TDD)				
PBCH_RA	dB			
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB		0	
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA ^{Note 1}	dB			
OCNG_RB ^{Note 1}	dB	1		
Qqualmin for UTRA	dB		-20	
neighbour cell	uБ		-20	
Qrxlevmin for UTRA	dBm	445		
neighbour cell	ubili		-115	
Qrxlevmin	dBm		-140	
N_{oc}	dBm/15 kHz		-98	
RSRP	dBm/15 KHz	-86 + TT	-102 + TT	
\hat{E}_s/I_{ot}	dB	12 + TT -4 + TT		
\hat{E}_s/N_{oc}	dB	12 + TT	-4 + TT	
Treselection _{EUTRAN}	S	0		
Snonintrasearch	dB	Not sent		
Thresh _{serving, low}	dB	44		
Thresh _{x, low} (Note 2)	dB	42		
Propagation Condition		AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: This refers to the value of Thresh_{x, low} which is included in E-UTRA system information, and is a threshold for the UTRA target cell.

Table 4.3.3.5-2: Cell specific test parameters for Cell 2(Lower priority UTRA FDD)

Parameter	Unit	Cell 2 (UTRA)			
		T1	T2		
UTRA RF Channel Number		Channel 2			
CPICH_Ec/lor	dB	-1	0		
PCCPCH_Ec/lor	dB	-1	2		
SCH_Ec/lor	dB	-1	2		
PICH_Ec/lor	dB	-1	5		
OCNS_Ec/lor	dB	-0.9	941		
$ \hat{I}_{or}/I_{oc} $	dB	13+TT	13+TT		
I_{oc}	dBm/3,84 MHz	-70			
CPICH_Ec/Io	dB	-10.21 + TT	-10.21 + TT		
CPICH_RSCP	dBm	-67+TT	-67+TT		
Propagation Condition		AWGN			
Qqualmin	dB	-20			
Qrxlevmin	dBm	-11	15		
QrxlevminEUTRA	dBm	-14	10		
UE_TXPWR_MAX_RACH	dBm	2	1		
Treselection	S	0			
Sprioritysearch1	dB	42			
Sprioritysearch2	dB	0			
Thresh _{x, high} (Note 1) dB 48					
Note: This refers to the value of Thresh _x , high which is included in UTRA system information, and is a threshold for the E-UTRA target cell.					

The cell reselection delay to lower priority is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message on cell 2.

The cell re-selection delay to lower priority test requirement in this case is expressed as:

Cell re-selection delay to lower priority = $T_{evaluateUTRA\ FDD} + T_{SI-EUTRA}$

 $T_{evaluateUTRA\ FDD} = 19.2 \text{ s}$; as specified in TS 36.133 [4] clause 4.2.2.5

 $T_{SI-EUTRA} = 1280 \text{ ms}$; as specified in TS 36.133 [4] clause 4.2.2.4

The cell re-selection delay to lower priority shall be less than a total of 21 seconds in this test case (note: this gives a total of 20.48 seconds but the test allows 21 seconds).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

E-UTRAN TDD - UTRAN TDD cell re-selection 4.3.4

Editor's note: This section is incomplete. The following aspects are either missing or not yet determined:

- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined
- Statistical testing of UE measurement performance requirements are undefined

E-UTRA TDD - UTRAN TDD cell re-selection : UTRA is of higher priority 4.3.4.1

4.3.4.1.1 Test purpose

To verify that the UE is able to search and measure neighbouring UTRA TDD cells and compare to the E-UTRA serving cell to meet the inter-RAT cell re-selection requirements when the UTRA is of higher priority.

4.3.4.1.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward that support UTRA TDD.

4.3.4.1.3 Minimum conformance requirements

When the measurement rules indicate that UTRA TDD cells are to be measured, the UE shall measure P-CCPCH RSCP of detected UTRA TDD cells in the neighbour frequency list at the minimum measurement rate. The parameter N_{UTRA_carrier_TDD} is the number of carriers in the neighbour frequency list. The UE shall filter P-CCPCH RSCP measurements of each measured UTRA TDD cell using at least [2] measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least half the minimum specified measurement period.

If the $S_{ServingCell}$ of the E-UTRA serving cell (or other cells on the same frequency layer) is greater than $S_{nonintrasearch}$ then:

- The UE may not search for, or measure inter-RAT layers of equal or lower priority.
- The UE shall search for inter-RAT layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in TS 36.133 [4] clause 4.2.2 as $T_{higher_priority_search} = (60 * N_{layers})$ seconds, where the parameter N_{layers} is the total number of configured higher priority carrier frequencies.

If the $S_{ServingCell}$ of the E-UTRA serving cell is less than or equal to $S_{nonintrasearch}$ then the UE shall search for and measure inter-RAT layers of higher, equal or lower priority in preparation for possible re-selection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority inter-RAT layers shall be the same as that defined below for lower priority RATs.

The UE shall evaluate whether newly detectable UTRA TDD cells have met the re-selection criteria in TS 36.304 [6] within time $N_{UTRA_carrier_TDD}$ * $T_{detectUTRA_TDD}$ (as defined in table 4.2.2.5.2-1 of TS 36.133 [4] clause 4.2.2.5.2) except when UTRA TDD is of higher priority than the currently selected E-UTRA frequency layer and the $S_{ServingCell}$ of the E-UTRA serving cell is greater than $S_{nonintrasearch}$ when Treselection_{RAT} = 0.

Cells which have been detected shall be measured at least every $N_{UTRA_carrier_TDD} * T_{measureUTRA_TDD}$ except when UTRA TDD is of higher priority than the currently selected E-UTRA frequency layer and the $S_{ServingCell}$ of the E-UTRA serving cell (or other cells on the same frequency layer) is greater than $S_{nonintrasearch}$.

When higher priority UTRA TDD cells are found by the higher priority search, they shall be measured at least every $T_{measureUTRA_TDD}$. If re-selection to any higher priority cell is not triggered within ($T_{evaluateUTRA_TDD}$ + Treselection_{RAT}) after it is found in a higher priority search, the UE is not required to continue making measurements of the cell to evaluate the ongoing possibility of re-selection.

For a cell that has been already detected, but that has not been re-selected to, the filtering shall be such that the UE shall be capable of evaluating that an already identified UTRA TDD cell has met re-selection criterion defined in TS 36.304 6] within $N_{\text{UTRA_carrier_TDD}} * T_{\text{evaluateUTRA_TDD}}$ as defined in table 4.2.2.5.2-1 of TS 36.133 [4 clause 4.2.2.5.2 when Treselection_RAT = 0.as specified in table 4.2.2.5.2-1 provided that the reselection criteria is met by a margin of at least [6]dB.

The normative reference for this requirement is TS 36.133 [4] clause 4.2.2.5.2 and A.4.3.4.

4.3.4.1.4 Test description

4.3.4.1.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B/eNodeB emulator) and AWGN noise source to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.22.
- 2. The general test parameter settings are set up according to Table 4.3.4.1.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.

- 4. Message contents are as defined in clause 4.3.41..4.3.
- 5. There is one E-UTRA TDD cell and one UTRA TDD cell specified in the test. Cell 2 is the cell used for registration.

Table 4.3.4.1.4.1-1: General test parameters for E-UTRAN to UTRAN (1.28 Mcps TDD OPTION) Cell Reselection

Para	ameter	Unit	Value	Comment
Initial	Active cell		Cell 2	UE shall be forced to cell 2 in the initialisation phase, so that
condition				reselection to cell 1 occurs during the first T1 phase
T1 end	Active cell		Cell1	UE shall perform reselection to cell 1 during T1
condition	Neighbour cell		Cell2	1.28 Mcps TDD OPTION cell
T3 end	Active cell		Cell2	UE shall perform reselection to cell 2 during T3
condition	Neighbour cell		Cell1	E-UTRA TDD cell
Uplink-downli configuration			1	As specified in table 4.2.2 in TS 36.211
Special subfraconfiguration			6	As specified in table 4.2.1 in TS 36.211
PRACH confi	guration of cell		53	As specified in table 4.7.1-3 in TS 36.211
CP length of	cell 1		Normal	
Time offset b	etween cells		3 ms	Asynchronous cells 3ms or 92160*Ts
Access Barrin	ng Information	-	Not sent	No additional delays in random access procedure.
Treselection		S	0	
DRX cycle le	ngth	S	1,28	
HCS			Not used	
T1		S	25	T1 need to be defined so that cell re-selection reaction time is taken into account.
T2		S	>20	During T2, cell 2 shall be powered off, and during the off time the scrambling code shall be changed, The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3
Т3		S	85	T3 need to be defined so that cell re-selection reaction time is taken into account.

4.3.4.1.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. Both E-UTRA cell 1 and UTRA cell 2 are already identified by the UE prior to the start of the test. At T1 the UE is camped on to cell 1. During T2, cell 2 shall be powered off, and during the off time the scrambling code shall be changed. At starting T3 cell 2 becomes stronger than Thresh_{x_high}, the UE is expected to detect cell 2, send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on cell 2.

- 1. Ensure the UE is in State 2A according to TS 36.508 [7] clause 4.5.2A.
- 2. Set the parameters according to duration T1 in Table 4.3.4.1.5-1 and 4.3.4.1.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. The SS waits for random access requests information from the UE to perform cell re-selection procedure on the lower priority cell, Cell 1.
- 4. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 4.3.4.1.5-1 and 4.3.4.1.5-2. During T2, cell 2 shall be powered off and the SS shall set Cell 2 primary scrambling code = ((current cell 2 primary scrambling code 50) mod 200 + 100).
- 5. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 4.3.4.1.5-1 and 4.3.4.1.5-2.

- 6. The SS waits for random access requests information from the UE to perform cell re-selection procedure on the higher priority cell, Cell 2.
- 7. If the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message on Cell 2 within 81s from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 8. Repeat step 2-7 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

4.3.4.1.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 4.3.4.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information	Table H.2.3-3
blocks exceptions	Table H.2.3-4
Default RRC messages and information	Table H.3.2-2
elements contents exceptions	

The UTRA system information for inter-RAT frequency and priority information to be used during the initialisation phase is not defined in the message contents exceptions.

4.3.4.1.5 Test requirement

Tables 4.3.4.1.4-1, 4.3.4.1.5-1 and 4.3.4.1.5-2 define the primary level settings including test tolerances for cell reselection E-UTRA TDD to UTRA TDD test case (UTRA is of higher priority).

Table 4.3.4.1.5-1: Cell specific test requirement parameters for cell re-selection E-UTRA TDD to UTRA TDD test case (cell 1)

Parameter	Unit		Cell 1		
		T1	T2	T3	
E-UTRA RF Channel			1		
Number					
BW _{channel}	MHz		10		
PBCH_RA	dB				
PBCH_RB	dB				
PSS_RB	dB				
SSS_RB	dB				
PCFICH_PA	dB				
PHICH_PA	dB				
PHICH_PB	dB	0	0	0	
PDCCH_PA	dB				
PDCCH_PB	dB				
PDSCH_PA	dB				
PDSCH_PB	dB				
OCNG_RA ^{Note 1}	dB				
OCNG_RB ^{Note 1}	dB				
Q _{rxlevmin}	dBm/15kHz	-140	-140	-140	
N_{oc}	dBm/15kHz	-98			
RSRP	dBm/15kHz	-87+TT	-87+TT	-87+TT	
\hat{E}_s/I_{ot}	dB	11+TT	11+TT	11+TT	
Thresh _{x, high} (Note2)	dB		24(-79dBm)		
S _{nonintrasearch}	rasearch dB 46				
Propagation Condition	Propagation Condition AWGN				

Note 1: OCNG shall be used such that cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: This refers to the value of Thresh_{x, high} which is included in E-UTRA system information, and is a threshold for the UTRA target cell.

Table 4.3.4.1.5-2: Cell specific test requirement parameters for cell re-selection E-UTRA TDD to UTRA TDD test case (cell 2)

Parameter	Unit	Cell 2 (UTRA)					
Timeslot Number		0 DwPTS			3		
		T1	T2	T3	T1	T2	T3
UTRA RF Channel Number (Note1)		Channel 2					
PCCPCH_Ec/lor	dB	-3	-3	-3			
DwPCH_Ec/lor	dB				0	0	0
OCNS_Ec/lor	dB	-3	-3	-3			
\hat{I}_{or}/I_{oc}	dB	-3+TT	-inf	11+TT	-3+TT	-inf	11+TT
I_{oc}	dBm/1.28 MHz	z -80					
PCCPCH RSCP	dBm	-86 +TT	-inf	-72+TT		n.a.	
Propagation Condition		AWGN					
Q _{rxlevmin}	dBm			-10	3		
Qoffset _{s,n}	dB			C1, C	2: 0		
Qhysts	dB	0					
Snonintrasearch	dB	Not sent					
Thresh _{serving, low}	dB	24 (-79dBm)					
Thresh _{x, low} (Note2)	dB			46 (-94	dBm)		

Note 1: In the case of multi-frequency cell, the UTRA RF Channel Number is the primary frequency's channel number.

Note 2: This refers to the value of Threshx, low which is included in UTRA system information, and is a threshold for the E-UTRA target cell.

The cell reselection delay to higher priority is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 2, and starts to send the SYNCH-UL sequence in the UpPTS for sending the RRC CONNECTION REQUEST message on cell 2.

The cell re-selection delay to higher priority shall be less than 81 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluateUTRA_TDD} + T_{SI_UTRA}$,

Where:

 $T_{higher_priority_search}$ 60s, See s TS 36.133 [4] section 4.2.2.5

T_{evaluateUTRA TDD} 19.2s, See TS 36.133 [4] Table 4.2.2.5.2-1

T_{SL_UTRA} Maximum repetition period of relevant system info blocks that need to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 80.48 s, allow 81 s for higher priority cell reselection in the test case.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

4.3.4.2 E-UTRAN TDD - UTRAN TDD cell re-selection: UTRA is of lower priority

4.3.4.2.1 Test purpose

To verify that the UE is able to search and measure neighbouring UTRA TDD cells and compare to the E-UTRA serving cell to meet the inter-RAT cell re-selection requirements when the UTRA is of lower priority.

4.3.4.2.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward that support UTRA TDD.

4.3.4.2.3 Minimum conformance requirements

When the measurement rules indicate that UTRA TDD cells are to be measured, the UE shall measure P-CCPCH RSCP of detected UTRA TDD cells in the neighbour frequency list at the minimum measurement rate. The parameter $N_{UTRA_carrier_TDD}$ is the number of carriers in the neighbour frequency list. The UE shall filter P-CCPCH RSCP measurements of each measured UTRA TDD cell using at least [2] measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least half the minimum specified measurement period.

If the $S_{ServineCell}$ of the E-UTRA serving cell (or other cells on the same frequency layer) is greater than $S_{nonintrasearch}$ then:

- The UE may not search for, or measure inter-RAT layers of equal or lower priority.
- The UE shall search for inter-RAT layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in TS 36.133 [4] clause 4.2.2 as $T_{higher_priority_search} = (60 * N_{layers})$ seconds, where the parameter N_{layers} is the total number of configured higher priority carrier frequencies.

If the $S_{\text{ServingCell}}$ of the E-UTRA serving cell is less than or equal to $S_{\text{nonintrasearch}}$ then the UE shall search for and measure inter-RAT layers of higher, equal or lower priority in preparation for possible re-selection. In this scenario, the minimum rate at which the UE is required to search for and measure such layers is not reduced and shall be the same as that defined below for lower priority RATs.

The UE shall evaluate whether newly detectable UTRA TDD cells have met the re-selection criteria in TS 36.304 [6] within time $N_{UTRA_carrier_TDD} * T_{detectUTRA_TDD}$ (as defined in table 4.2.2.5.2-1 of TS 36.133 [4] clause 4.2.2.5.2) except when UTRA TDD is of higher priority than the currently selected E-UTRA frequency layer and the $S_{ServingCell}$ of the E-UTRA serving cell (or other cells on the same frequency layer) is greater than $S_{nonintrasearch}$ when Treselection_{RAT} = 0.

Cells which have been detected shall be measured at least every $N_{UTRA_carrier_TDD}$ * $T_{measureUTRA_TDD}$ except when UTRA TDD is of higher priority than the currently selected E-UTRA frequency layer and the $S_{ServingCell}$ of the E-UTRA serving cell (or other cells on the same frequency layer) is greater than $S_{nonintrasearch}$.

When higher priority UTRA TDD cells are found by the higher priority search, they shall be measured at least every $T_{measureUTRA_TDD}$. If re-selection to any higher priority cell is not triggered within ($T_{evaluateUTRA_TDD}$ + Treselection_{RAT}) after it is found in a higher priority search, the UE is not required to continue making measurements of the cell to evaluate the ongoing possibility of re-selection.

For a cell that has been already detected, but that has not been re-selected to, the filtering shall be such that the UE shall be capable of evaluating that an already identified UTRA TDD cell has met re-selection criterion defined in TS 36.304 [6] within $N_{\text{UTRA_carrier_TDD}} * T_{\text{evaluateUTRA_TDD}}$ as defined in table 4.2.2.5.2-1 of TS 36.133 [4] clause 4.2.2.5.2 when Treselection_{RAT} = 0.

The normative reference for this requirement is TS 36.133 [4] clause 4.2.2.5.2 and A.4.3.4.

4.3.4.2.4 Test description

4.3.4.2.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B/eNodeB emulator) and AWGN noise source to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.22.
- 2. The general test parameter settings are set up according to Table 4.3.4.2.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 4.3.4.2.4.3.
- 5. There is one E-UTRA TDD cell and one UTRA TDD cell specified in the test. Cell 1 is the cell used for registration.

Table 4.3.4.2.4.1-1: General test parameters for E-UTRAN to UTRAN (1.28 Mcps TDD OPTION) Cell Reselection

Para	meter	Unit	Value	Comment
Initial condition	Activ4.3.1.e cell		Cell 1	E-UTRAN FDD Cell
T1 end	Active cell		Cell1	UE shall perform reselection to cell 1 during T1 for
condition				subsequent iterations of the test.
	Neighbour cell		Cell2	1.28 Mcps TDD OPTION cell
T2 end	Active cell		Cell2	UE shall perform reselection to cell 2 during T2
condition	Neighbour cell		Cell1	E-UTRA TDD cell
Uplink-downlink	configuration of		1	As specified in table 4.2.2 in TS 36.211
cell 1				
Special subframe	e configuration of		6	As specified in table 4.2.1 in TS 36.211
cell 1				
PRACH configur	ation of cell 1		53	As specified in table 4.7.1-3 in TS 36.211
CP length of cell	1		Normal	
Time offset betw	een cells		3 ms	Asynchronous cells
				3ms or 92160*Ts
Access Barring I	nformation	-	Not sent	No additional delays in random access procedure.
Treselection		S	0	
DRX cycle length		S	1,28	
HCS			Not	
			used	
T1		S	85	
T2		S	25	

4.3.4.2.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The UE is requested to monitor the neighbouring cell on one UTRA TDD carrier. In the test there are two successive time periods, with time duration of T1 and T2 respectively. Both Cell 1 and Cell 2 are already identified by the UE prior to the start of the test. At T1 the UE is camped on to Cell 1. Cell 1 and Cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing Cell 2.

- 1. Ensure the UE is in State 2A according to TS 36.508 [7] clause 4.5.2A.
- 2. Set the parameters according to T1 in Table4.3.4.2.5-1 and 4.3.4.2.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 4.3.4.2.5-1 and 4.3.4.2.5-2.
- 4. The SS waits for random access requests information from the UE to perform cell re-selection on Cell 2.
- 5. If the UE responds on Cell 2 during time duration T2 within 21 seconds from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 6. Repeat step 1-5 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

4.3.4.2.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 4.3.4.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information	Table H.2.3-7
blocks exceptions	Table H.2.3-8
Default RRC messages and information	Table H.3.2-2
elements contents exceptions	

The UTRA system information for inter-RAT frequency and priority information to be used during the initialisation phase is not defined in the message contents exceptions.

4.3.4.2.5 Test requirement

Tables 4.3.4.2.4.1-1, 4.3.4.2.5-1 and 4.3.4.2.5-2 define the primary level settings including test tolerances for E-UTRAN TDD- UTRAN TDD intra frequency cell re-selection test case which UTRA is of lower priority.

Table 4.3.4.2.5-1: Cell specific test requirement parameters for cell re-selection E-UTRA TDD to UTRA TDD test case (cell 1)

Parameter	Unit	Ce	II 1		
		T1	T2		
E-UTRA RF Channel		,	1		
Number					
BW _{channel}	MHz	1	0		
PBCH_RA	dB				
PBCH_RB	dB				
PSS_RB	dB				
SSS_RB	dB				
PCFICH_PA	dB				
PHICH_PA	dB				
PHICH_PB	dB	0	0		
PDCCH_PA	dB				
PDCCH_PB	dB				
PDSCH_PA	dB				
PDSCH_PB	dB				
OCNG_RA(Note1)	dB				
OCNG_RB(Note1)	dB				
Q _{rxlevmin}	dBm/15kHz	-140	-140		
N_{oc}	dBm/15kHz	-6	88		
RSRP	dBm/15kHz	-87	-101		
\hat{E}_{s}/I_{ot}	dB	11	-3		
Snonintrasearch	dB	Not	sent		
Thresh _{serving, low}	dB	46 (-94dBm)			
Thresh _{x, low (Note2)}	dB	24 (-79dBm)			
Propagation Condition		AW	'GN		
Note 1: OCNG shall be used such that cell is fully allocated and a					

Note 1: OCNG shall be used such that cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: This refers to the value of Threshx, low which is included in E-UTRA system information, and is a threshold for the UTRA target cell

Table 4.3.4.2.5-2: Cell specific test requirement parameters for cell re-selection E-UTRA TDD to UTRA TDD test case (cell 2)

Parameter	Unit		Cell 2 (UTRA)			
Timeslot Number		0 DwPT			PTS	
		T1	T2	T1	T2	
UTRA RF Channel Number (Note1)			Cha	nnel 2		
PCCPCH_Ec/lor	dB	-3	-3			
DwPCH_Ec/lor	dB			0	0	
OCNS_Ec/lor	dB	-3	-3			
\hat{I}_{or}/I_{oc}	dB	11	11	11	11	
I_{oc}	dBm/1.28 MHz	-80				
PCCPCH RSCP	dBm	-72	-72	n.a.	n.a.	
Propagation Condition		AWGN				
Q _{rxlevmin}	dBm	-103				
Qoffset _{s,n}	dB	C1, C2: 0				
Qhyst _s	dB	0				
Thresh _{x, high} (Note2)	dB	46 (-94dBm)				
Note 1: In the case of multi-frequency cell, the UTRA RF Channel Number is the						
	primary frequency's channel number.					

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2 and starts to send the SYNCH-UL sequence in the UpPTS for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay test requirement in this case is expressed as:

Cell re-selection delay = $T_{evaluateUTRA\ TDD} + T_{SI\ UTRA}$,

 $T_{evaluateUTRA_TDD}$ =19.2s; as specified in TS 36.133 [4] clause 4.2.2.5.2

T_{SI-UTRA} = 1280 ms; Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

The cell re-selection delay shall be less than a total of 21 seconds in this test case (note: this gives a total of 20.48 seconds but the test allows 21 seconds).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

4.3.4.3 EUTRA TDD-UTRA TDD cell reselection in fading propagation conditions: UTRA TDD is of lower priority

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined.

4.3.4.3.1 Test purpose

To verify that the UE is able to search and measure neighbouring UTRA TDD cells and compare to the E-UTRA serving cell to meet the inter-RAT cell re-selection requirements when the UTRA is of lower priority. The E-UTRA cell is in fading propagation conditions and the UTRA cell is in AWGN propagation conditions.

4.3.4.3.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward that support UTRA TDD.

4.3.4.3.3 Minimum conformance requirements

When the measurement rules indicate that UTRA TDD cells are to be measured, the UE shall measure P-CCPCH RSCP of detected UTRA TDD cells in the neighbour frequency list at the minimum measurement rate specified in this section. The parameter $N_{\text{UTRA_carrier_TDD}}$ is the number of carriers in the neighbour frequency list. The UE shall filter P-CCPCH RSCP measurements of each measured UTRA TDD cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least half the minimum specified measurement period. P-CCPCH RSCP of UTRAN TDD cells shall not be filtered over a longer period than that specified in table 4.3.4.3.3-1.

The UE shall evaluate whether newly detectable UTRA TDD cells have met the reselection criteria in TS 36.304 within time ($N_{UTRA_carrier_TDD}$) * $T_{detectUTRA_TDD}$ when the $S_{ServingCell}$ of the E-UTRA serving cell is less than $S_{nonintrasearch}$ when $T_{reselection} = 0$ provided that the reselection criteria is met by a margin of at least 6dB.

Cells which have been detected shall be measured at least every $(N_{UTRA_carrier_TDD}) * T_{measureUTRA_TDD}$ when the $S_{ServingCell}$ of the E-UTRA serving cell is less than $S_{nonintrasearch}$.

When higher priority UTRA TDD cells are found by the higher priority search, they shall be measured at least every $T_{measure,UTRA_TDD}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this section shall still be met by the UE before it makes any determination that it may stop measuring the cell.

For a cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that an already identified UTRA TDD cell has met reselection criterion defined in [1] within $N_{UTRA_carrier_TDD}$ * $T_{evaluateUTRA_TDD}$ when $T_{reselection} = 0$ as specified in table 4.3.4.3.3-1 provided that the reselection criteria is met by a margin of at least 6dB.

DRX cycle length [s]	T _{detectUTRA_TDD}	T _{measureUTRA_TDD} [s] (number of DRX cycles)	T _{evaluateUTRA_TDD} [s] (number DRX cycles)	of
0.32		5.12 (16)	15.36 (48)	
0.64	30	5.12 (8)	15.36 (24)	
1.28		6.4(5)	19.2 (15)	
2.56	60	7 68 (3)	23 04 (9)	

Table 4.3.4.3.3-1: $T_{detectUTRA_TDD}$, $T_{measureUTRA_TDD}$ and $T_{evaluateUTRA_TDD}$

The normative reference for this requirement is TS 36.133 [4] clause 4.2.2.5.2 and A.4.3.4.3.

4.3.4.3.4 Test description

4.3.4.3.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.2.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.2.

- 1. Connect the SS (node B emulator) and faders and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.15.
- 2. The general test parameter settings are set up according to Table 4.3.4.3.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 4.3.4.3.4.3.
- 5. There is one E-UTRA TDD cell and one UTRA TDD cell specified in the test. Cell 1 is the cell used for registration according to TS 36.508 [7] clause 4.5.2A with the power level set according to Annex C.0 and C.1. After the registration with E-UTRA cell, the UE shall be forced to Cell 2 in place.

Table 4.3.4.3.4.1-1: General test parameters for EUTRA TDD- lower priority UTRA TDD inter RAT cell re-selection test case in fading conditions

	Parameter	Unit	Value	Comment
Initial condition	Active cell		Cell2	UE shall be forced to cell 2 in the initialisation phase, so that reselection to cell 1 occurs during the first T1 phase
T1 end	Active cells		Cell1	UE shall perform reselection to cell 1 during T1
condition	Neighbour cell		Cell2	
T3 end	Active cell		Cell2	UE shall perform reselection to cell 2 during T3
condition	Neighbour cell		Cell1	
E-UTRA P	RACH configuration		53	As specified in table 5.7.1-3 in TS 36.211
Uplink-dow cell 1	nlink configuration of		1	As specified in table 4.2.2 in TS 36.211
Special sul cell 1	oframe configuration of		6	As specified in table 4.2.1 in TS 36.211
E_UTRA A Information	ccess Barring	-	Not Sent	No additional delays in random access procedure.
DRX cycle	length	S	1.28	The value shall be used for all cells in the test.
T1		S	<85	T1 need to be defined so that cell re-selection reaction time is taken into account. T1 is terminated when the UE starts to send preambles to cell 1
T2		S	64	The start of T2 is defined as the time when the UE starts to send PRACH preambles to cell 1
ТЗ		S	<25	T3 need to be defined so that cell re-selection reaction time is taken into account. T3 is terminated when the UE starts to send PRACH preambles to cell 2
T4		S	64	The start of T4 is defined as the time when the UE starts to send PRACH preambles to cell 2

4.3.4.3.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The UE is requested to monitor the neighbouring cell on one UTRA TDD carrier. In the test there are four successive time periods, with time duration of T1, T2, T3 and T4 respectively. Both E-UTRA Cell 1 and UTRA Cell 2 are already identified by the UE prior to the start of the test. At T1 the UE is camped on to Cell 1. Cell 2 is of lower priority than Cell 1. Cell 1 and Cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing Cell 2. Time duration T2 and T4 are not used for cell re-selection in the test.

- 1. Ensure the UE is in idle mode in cell 2 to camp on.
- 2. Set the parameters according to T1 in Table 4.3.4.3.5-1 and 4.3.4.3.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. When T1 expires, the SS shall switch the power setting from T1 to T3 as specified in Table 4.3.4.3.5-1 and 4.3.4.3.5-2.
- 4. The SS waits for random access requests information from the UE to perform cell re-selection on Cell 2.
- 5. If the UE responds on Cell 2 during time duration T3 within 21 seconds from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 6. Repeat step 1-5 until the confidence level according to Table G.2.6-1 in Annex G clause G.2 is achieved.

4.3.4.3.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 4.3.4.3.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information	
blocks exceptions	Table H.2.3-5
Default RRC messages and information	Table H.3.2-2
elements contents exceptions	

Table 4.3.4.3.4.3-2: SystemInformationBlockType6: Inter-RAT E-UTRA TDD - UTRA TDD is of lower priority cell re-selection

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-5 SystemInformationBlockType6								
Information Element	Value/remark	Comment	Condition					
CarrierFreqListUTRA-TDD ::= SEQUENCE (SIZE			UTRA-FDD					
(1maxUTRA-TDD-Carrier)) OF SEQUENCE {								
threshX-High	22 (44 dB)							
threshX-Low	12 (24 dB)	24 is actual value						
		in dB (12 * 2 dB)						
q-RxLevMin	-52 (-103 dBm)	-103 is actual value						
		in dBm (52 * 2 + 1						
		dBm)						
p-MaxUTRA	21 (21 dBm)							
}								

The UTRA system information for inter-RAT frequency and priority information to be used during the initialisation phase is not defined in the message contents exceptions.

4.3.4.3.5 Test requirement

Tables 4.3.4.3.4.1-1, 4.3.4.3.5-1 and 4.3.4.3.5-2 define the primary level settings including test tolerances for E-UTRA TDD- UTRA TDD inter-RAT cell re-selection test case which UTRA is of lower priority.

Table 4.3.4.3.5-1: Cell specific test parameters for cell 1 (E-UTRA)

Parameter	Unit	Cell 1			
		T1	T2	T3	T4
E-UTRA RF Channel				1	
number					
BW _{channel}	MHz		1	0	
OCNG Patterns defined in			OP.2	TDD	
D.2.2 (OP.2 TDD)					
PSS_RA	dB				
SSS_RA	dB				
PCFICH_RB	dB				
PHICH_RA	dB				
PHICH_RB	dB				
PDCCH_RA	dB		(0	
PDCCH_RB	dB				
PDSCH_RA	dB				
PDSCH_RB	dB				
OCNG_RA ^{Note 1}	dB				
OCNG_RB ^{Note 1}	dB				
Qrxlevmin for UTRA	dBm		-1	03	
neighbour cell					
Qrxlevmin	dBm		-1	40	
N_{oc}	dBm/15 kHz		-1	04	
RSRP	dBm/15 KHz	-82+TT	-82+TT	-107+TT	-107+TT
\hat{E}_{s}/I_{ot}	dB	22+TT	22+TT	-3+TT	-3+TT
\hat{E}_s/N_{oc}	dB	22+TT 22+TT -3+TT -3+T			
Treselection _{EUTRAN}	S	0			
Snonintrasearch	dB		Not	sent	
Thresh _{serving, low}	dB	44			
Thresh _{serving, low} Thresh _{x, low} (Note 2)	dB	24			
Propagation Condition		ETU70			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2 : This refers to the value of Thresh_{x, low} which is included in E-UTRA system information, and is a threshold for the UTRA target cell.

Unit Cell 2 (UTRA) **Parameter DwPTS** Timeslot Number 0 T4 <u>T1</u> T2 T3 T1 T4 T2 | T3 UTRA RF Channel Number (Note1 Channel 2 PCCPCH_Ec/lor dB -3 DwPCH_Ec/lor dB 0 OCNS_Ec/lor dB -3 13 13 13+ 13+ 13 +13+ 13+ 13+ \hat{I}_{or}/I_{oc} dB +T +T TT TT TT TT TT TT $I_{\underline{oc}}$ dBm/1.28 MHz -80 PCCPCH RSCP dBm 70+ 70+ 70+ 70+ n.a. n.a. n.a. n.a. TT TT TT TT **AWGN Propagation Condition** dBm Qrxlevmin -103 **Qrxlevmin**_{EUTRA} dBm -140 _TXPWR_MAX_RACH dBm 21 Treselection 0 s dB Thresh_{x, high} (44 In the case of multi-frequency cell, the UTRA RF Channel Number is the primary frequency's Note1: channel number. This refers to the value of Threshx, high which is included in UTRA system information, and is a

Table 4.3.4.3.5-2: Cell specific test parameters for cell 2 (UTRA)

The probability of reselection from cell 1 to cell 2 during T2 observed during testing shall be less than 10%

The probability of reselection from cell 2 to cell 1 during T4 observed during testing shall be less than 10%

The cell reselection delay to lower priority is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 2, and starts to send the SYNCH-UL sequence in the UpPTS for sending the RRC CONNECTION REQUEST message on cell 2. In order to evaluate reselection delay, the system simulator first needs to verify that the UE is camped on cell 1 at the start of T3

The cell re-selection delay to lower priority cell can be expressed as:

threshold for the E-UTRA target cell

Cell re-selection delay to lower priority = $T_{evaluateUTRA\ TDD} + T_{SI-UTRA}$

 $T_{evaluateUTRA\ TDD}$ 19.2s, as specified in TS 36.133 [4] Table 4.2.2.5.2-1

T_{SI-UTRA} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

The cell re-selection delay to lower priority shall be less than a total of 21 seconds in this test case (note: this gives a total of 20.48 seconds but the test allows 21 seconds).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

4.4 E-UTRAN to GSM Cell Re-Selection

E-UTRAN FDD - GSM cell re-selection 4.4.1

4.4.1.1 Test purpose

Note2:

To verify that the UE is able to search and measure neighbouring GSM cells and compare to the E-UTRA serving cell to meet the inter-RAT cell re-selection requirements.

4.4.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward that support GSM.

4.4.1.3 Minimum conformance requirements

The cell re-selection delay shall be less than $4 * T_{measure, GSM} + T_{BCCH}$ in RRC_IDLE state.

When the measurement rules defined in TS 36.304 [6] indicates that E-UTRAN inter-frequencies or inter-RAT frequency cells are to be measured, the UE shall measure the signal level of the GSM BCCH carriers if the GSM BCCH carriers are indicated in the measurement control system information of the serving cell, GSM BCCH carriers of lower priority than the serving cell shall be measured at least every $T_{measure,GSM}$ as defined in table 4.2.2.5.3-1 of TS 36.133 [4] clause 4.2.2.5.3.

When higher priority GSM BCCH carriers are found by the higher priority search, they shall be measured at least every $T_{\text{measure,GSM}}$, and the UE shall decode the BSIC of the GSM BCCH carrier. If, after detecting a cell in a higher priority search, it is determined that re-selection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of re-selection, or to continuously verify the BSIC of the GSM BCCH carrier every 30s.

However, the minimum measurement filtering requirements specified shall still be met by the UE before it makes any determination that it may stop measuring the cell.

The UE shall maintain a running average of 4 measurements for each GSM BCCH carrier. The measurement samples for each cell shall be as far as possible uniformly distributed over the averaging period.

If continuous GSM measurements are required by the measurement rules in TS 36.304 [6], the UE shall attempt to verify the BSIC at least every 30 seconds for each of the 4 strongest GSM BCCH carriers. If a change of BSIC is detected for one GSM cell then that GSM BCCH carrier shall be treated as a new GSM neighbour cell. If the UE detects on a BCCH carrier a BSIC which is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform BSIC re-confirmation for that cell.

The UE shall not consider the GSM BCCH carrier in cell re-selection, if the UE cannot demodulate the BSIC of that GSM BCCH carrier. Additionally, the UE shall not consider a GSM neighbour cell in cell re-selection, if it is indicated as not allowed in the measurement control system information of the serving cell.

The UE shall evaluate the inter-RAT cell re-selection criteria as defined in TS 36.304 [6] at least every DRX cycle. The DRX cycle length is 1.28 seconds. When a non-zero value of Treselection_{EUTRAN} is used, the UE shall only perform reselection on an evaluation which occurs simultaneously to, or later than the expiry of the Treselection_{EUTRAN} timer.

At inter-RAT cell re-selection, the UE shall monitor the downlink of serving cell for paging reception until the UE is capable to start monitoring downlink channels for paging reception of the target inter-frequency cell. For E-UTRAN to GSM cell re-selection the interruption time must not exceed $T_{BCCH} + 50$ ms. T_{BCCH} is the maximum time allowed to read BCCH data from a GSM cell as defined in TS 45.008 [15] clause 6.2.

For idle mode cell re-selection purposes, the UE shall be capable of monitoring at least:

- Depending on UE capability, 3 FDD E-UTRA inter-frequency carriers, and
- Depending on UE capability, 32 GSM carriers

In addition to the requirements defined in TS 36.133 [4] clause 4.2.2.9 a UE in RRC_IDLE state shall be capable of monitoring a total of at least 8 carrier frequency layers, which includes serving layer, comprising of any defined in TS 36.133 [4] clause 4.2.2.9 combination of E-UTRA FDD, E-UTRA TDD, UTRA FDD, UTRA TDD, GSM (one GSM layer corresponds to 32 cells), cdma2000 1x and HRPD layers.

The normative reference for this requirement is TS 36.133 [4] clause 4.2.2.5.3 and A.4.4.1.

4.4.1.4 Test description

4.4.1.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14.
- 2. The general test parameter settings are set up according to Table 4.4.1.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B. 0.
- 4. Message contents are as defined in clause 4.4.1.4.3.
- 5. There is one E-UTRA FDD cell and one GSM cell specified in the test. Cell 1 (E-UTRA FDD cell) is the cell used for registration with the power level set according to Annex C.0 and C.1 for this test.

Table 4.4.1.4.1-1: General Test Parameters for E-UTRAN FDD - GSM cell re-selection test case

P	Parameter		Value	Comment
Initial condition	Active cell		Cell1	UE shall be forced to cell 1 in the initialisation phase and shall be able to detect and monitor the 4 strongest GSM BCCH carriers in T1. Cell 1 is an E-UTRA FDD cell.
Final condition	Neighbour cell		Cell2	UE shall perform reselection to cell 2 during T2. Cell 2 is a GSM cell.
	Channel Number		1	1 E-UTRA FDD carrier frequency
GSM ARFCI	N		1	
Monitored G	SM cell list size		12 GSM neighbours including ARFCN 1	
PRACH con	figuration		4	As specified in table 5.7.1-2 in TS 36.211 [9]
Access Barr	ing Information	-	Not Sent	No additional delays in random access procedure.
CP length of	cell 1		Normal	
DRX cycle le	ength	S	1.28	The value shall be used for all cells in the test.
T1		S	35	T1 need to be defined so that cell re-selection reaction time is taken into account.
T2		S	35	T2 need to be defined so that the higher layer search periodicity and cell re-selection reaction time are taken into account.
Propagation	channel		AWGN	

4.4.1.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The UE is requested to monitor the neighbouring cells on one E-UTRA FDD carrier and twelve GSM cells. In the test there are two successive time periods, with time duration of T1 and T2 respectively. Cell 1 (E-UTRA FDD cell) and Cell 2 (GSM cell) shall belong to different Location Areas. By the end of T1, the UE has identified BSIC on the GSM BCCH carrier of Cell 2 but the signal levels do not meet the reselection criterion during T1. At the start of T2, the signal levels change such that Cell 2 meets the re-selection criterion. The GSM layer is configured at a lower priority than the serving E-UTRA FDD layer.

- 1. Ensure the UE is in State 2A according to TS 36.508 [7] clause 4.5.2A.
- 2. Set the parameters according to T1 in Table's 4.4.1.5-1 and 4.4.1.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table's 4.4.1.5-1 and 4.4.1.5-2.
- 4. The SS waits for location update information from the UE to perform cell re-selection on Cell 2.
- 5. If the UE responds on Cell 2 during time duration T2 within 27.9 seconds from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 6. Repeat step 1-5 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

4.4.1.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 4.4.1.4.3-1: Common Exception messages for E-UTRAN FDD - GSM cell re-selection test case

Default Message Contents				
	Table H.2.3-9			
blocks exceptions	Table H.2.3-10			
Default RRC messages and information	Table H.3.2-1			
elements contents exceptions				

All GSM cell messages indicated shall use the same content as described in the default message content in TS 45.008 [15] clause 9 for Rel-4 and later releases, with the exceptions above and as specified in Table 4.4.1.5-2.

4.4.1.5 Test requirement

Tables 4.4.1.4.1-1, 4.4.1.5-1 and 4.4.1.5-2 defines the primary level settings including test tolerances for E-UTRAN FDD to GSM cell re-selection test case.

Table 4.4.1.5-1: Cell Specific Test requirement Parameters for Cell 1 E-UTRAN FDD cell

Parameter	Unit	Cell 1		
		T1	T2	
E-UTRA RF Channel number		1		
BW _{channel}	MHz	10		
OCNG Patterns defined in		OP.2 FDD		
D.1.2 (OP.2 FDD)				
PBCH_RA	dB			
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB	()	
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA ^{Note 1}	dB			
OCNG_RB ^{Note 1}	dB			
Qrxlevmin	dBm	-1	40	
N_{oc}	dBm/15 kHz	-99	.10	
RSRP	dBm/15 KHz	-89.20	-102.80	
\hat{E}_{s}/I_{ot}	dB	9.90	-3.70	
\hat{E}_s/N_{oc}	dB	9.90	-3.70	
Treselection _{EUTRAN}	S	()	
Snonintrasearch	dB	Not sent		
Thresh Note 2	dB	44		
Thresh _{x, low} Note 2	dB	24		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
	e 2: This refers to Thresh _{x, low} which is included in E-UTRA system information, and is a threshold for GSM target cell.			

Table 4.4.1.5-2: Cell Specific Test requirement Parameters for Cell 2 GSM cell

Parameter	Unit	Cell 2 ((GSM)
Parameter	Onit	T1	T2
Absolute RF Channel		ARFO	:N 1
Number		AINI) N 1
RXLEV	dBm	-90.00	-75.00
RXLEV_ACCESS_MIN	dBm	-10)5
MS_TXPWR_MAX_CCH	dBm	24	4

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send the RR Channel Request message for location update to Cell 2.

The cell re-selection delay test requirement in this case is expressed as:

Cell re-selection delay = $4 * T_{measureGSM} + T_{BCCH}$

 $T_{\text{measureGSM}} = 6.40 \text{ s}$; as specified in TS 36.133 [4] clause 4.2.2.3

 T_{BCCH} = 1.9 s; maximum time allowed to read the BCCH data from GSM cell, when being synchronized to a BCCH carrier; as specified in TS 45.008 [15] clause 6.2

The cell re-selection delay shall be less than a total of 27.9 seconds in this test case (note: this gives a total of 26 seconds for the $T_{measureGSM}$ calculation plus 1.9 s for T_{BCCH} but the test allows 27.9 seconds).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

4.4.2 E-UTRAN TDD - GSM cell re-selection

4.4.2.1 Test purpose

To verify that the UE is able to search and measure neighbouring GSM cells and compare to the E-UTRA serving cell to meet the inter-RAT cell re-selection requirements.

4.4.2.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward that support GSM.

4.4.2.3 Minimum conformance requirements

If the $S_{ServingCell}$ of the E-UTRA serving cell (or other cells on the same frequency layer) is greater than $S_{nonintrasearch}$ then:

- The UE may not search for, or measure GSM cells if the priority of GSM is equal to, or lower than the serving cell.
- The UE shall search for and measure GSM cells if the priority of GSM is higher than the serving cell. The minimum rate at which the UE is required to search for and measure such layers may be reduced in this scenario to maintain UE battery life.

If the $S_{ServingCell}$ of the E-UTRA serving cell is less than or equal to $S_{nonintrasearch}$ then the UE shall measure, according to the measurement rules defined in TS 36.304 [6] at least every $T_{measure,GSM}$ as defined in table 4.2.2.5.3-1 of TS 36.133 [4] clause 4.2.2.5.3:

- If a detailed neighbour cell list is provided, the signal level of the GSM BCCH carrier of each GSM neighbour cell indicated in the measurement control system information of the serving cell; or
- If only BCCH carriers are provided, the signal level of the GSM BCCH carriers indicated in the measurement control system information of the serving cell

If the RSRP of the E-UTRA serving cell is greater than $S_{nonintrasearch}$ then the UE shall search for GSM BCCH carrier at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in TS 36.133 [4] clause 4.2.2 as $T_{higher_priority_search} = (60 * N_{layers})$ seconds, where the parameter N_{layers} is the total number of configured higher priority carrier frequencies. When

higher priority GSM BCCH carriers are found by the higher priority search, they shall be measured at least every $T_{measure,GSM}$, and the UE shall decode the BSIC of the GSM BCCH carrier. If re-selection to any higher priority cell is not triggered within (4 * $T_{measure_GSM}$ + $T_{reselection_{RAT}}$) after it has been found in a higher priority search, the UE is not required to continue make measurements of the BCCH carrier to evaluate the ongoing possibility of re-selection, or to continuously verify the BSIC of the GSM BCCH carrier every 30s.

The UE shall maintain a running average of 4 measurements for each GSM BCCH carrier. The measurement samples for each cell shall be as far as possible uniformly distributed over the averaging period.

If continuous GSM measurements are required by the measurement rules in TS 36.304 [6], the UE shall attempt to verify the BSIC at least every 30 seconds for each of the 4 strongest GSM BCCH carriers. If a change of BSIC is detected for one GSM cell then that GSM BCCH carrier shall be treated as a new GSM neighbour cell. If the UE detects on a BCCH carrier a BSIC which is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform BSIC re-confirmation for that cell.

The UE shall not consider the GSM BCCH carrier in cell re-selection, if the UE cannot demodulate the BSIC of that GSM BCCH carrier. Additionally, the UE shall not consider a GSM neighbour cell in cell re-selection, if it is indicated as not allowed in the measurement control system information of the serving cell.

The normative reference for this requirement is TS 36.133 [4] clause 4.2.2.5.3 and A.4.4.2.

4.4.2.4 Test description

4.4.2.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise source to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14.
- 2. The general test parameter settings are set up according to Table 4.4.2.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 4.4.2.4.3.
- 5. There is one E-UTRA TDD cell and one GSM cell specified in the test. Cell 1 (E-UTRA TDD cell) is the cell used for registration with the power level set according to Annex C.0 and C.1 for this test.

Table 4.4.2.4.1-1: General test parameters for E-UTRA TDD GSM cell re-selection test case

Para	meter	Unit	Value	Comment
Initial condition	Active cell		Cell1	UE shall be forced to cell 1 in the initialisation phase and shall be able to detect and monitor the 4 strongest GSM BCCH carriers in T1 . Cell 1 is an E-UTRA TDD cell.
Final condition	Neighbour cell		Cell2	UE shall perform reselection to cell 2 during T2. Cell 2 is a GSM cell.
E-UTRA RF C Number	Channel		1	1 E-UTRA TDD carrier frequency
GSM ARFCN			1	
Monitored GS	M cell list size		12 GSM neighbours including ARFCN 1	
Uplink-downling configuration of			1	As specified in table 4.2.2 in TS 36.211
Special subfraconfiguration f			6	As specified in table 4.2.1 in TS 36.211
PRACH configuration for cell			4	As specified in table 5.7.1-2 in TS 36.211
CP length of c	ell 1		Normal	
Access Barrin	g Information		Not Sent	No additional delays in random access procedure.
DRX cycle len	igth	S	1.28	The value shall be used for all cells in the test.
Propagation c	hannel		AWGN	
T1		S	35	T1 need to be defined so that cell re-selection reaction time is taken into account.
T2		S	35	T2 need to be defined so that the higher layer search periodicity and cell re-selection reaction time are taken into account.

4.4.2.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The UE is requested to monitor the neighbouring cell on one E-UTRA TDD carrier and twelve GSM cells. In the test there are two successive time periods, with time duration of T1 and T2 respectively. Cell 1 and Cell 2 belong to different tracking areas. By the end of T1, the UE has identified BSIC on the GSM BCCH carrier of Cell 2 but the signal levels do not meet the re-selection criterion. At the start of T2, the signal levels change such that Cell 2 meets the re-selection criterion. The GSM layer is configured at a lower priority than the serving E-UTRA TDD layer.

- 1. Ensure the UE is in State 2A according to TS 36.508 [7] clause 4.5.2A.
- 2. Set the parameters according to T1 in Table's 4.4.2.5-1 and 4.4.2.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table's 4.4.2.5-1 and 4.4.2.5-2.
- 4. The SS waits for random access requests information from the UE to perform cell re-selection on Cell 2.
- 5. If the UE responds on Cell 2 during time duration T2 within [28 seconds] from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 6. Repeat step 1-5 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

4.4.2.4.3 Message contents

Message contents are according to TS 36.508 [4] clause 4.6 with the following exceptions:

Table 4.4.2.4.3-1: Common Exception messages for E-UTRAN TDD - GSM cell re-selection test case

Default Message Contents				
Common contents of system information	Table H.2.3-9			
blocks exceptions	Table H.2.3-10			
Default RRC messages and information	Table H.3.2-2			
elements contents exceptions				

4.4.2.5 Test requirement

Tables 4.4.2.4.1-1, 4.4.2.5-1 and 4.4.2.5-2 defines the primary level settings including test tolerances for E-UTRAN FDD to GSM cell re-selection test case.

Table 4.4.2.5-1: Cell Specific Test requirement Parameters for Cell 1 E-UTRAN TDD cell

Parameter	Unit		Cell 1	
		T1	T2	
E-UTRA RF Channel			1	
number				
BW _{channel}	MHz		10	
OCNG Patterns defined in			OP.2 TDD	
D.2.2 (OP.2 TDD)				
PBCH_RA	dB			
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB		0	
PDCCH_RA	dB]		
PDCCH_RB	dB]		
PDSCH_RA	dB	7		
PDSCH_RB	dB	7		
OCNG_RA ^{Note 1}	dB	7		
OCNG_RB ^{Note 1}	dB			
Q _{rxlevmin}	dBm		-140	
N_{oc}	dBm/15 kHz		-99.10	
RSRP	dBm/15 KHz	-89.20	-102.80	
\hat{E}_{s}/I_{ot}	dB	9.90	-3.70	
\hat{E}_s/N_{oc}	dB	9.90	-3.70	
TreselectionEUTRAN	S		0	
S _{nonintrasearch}	dB		Not sent	
Thresh _{serving, low}	dB	44		
Thresh _{x, low} (Note 2)	dB	24		
Note 1: OCNG shall be use				
	constant total transmitted power spectral density is achieved for all			
	OFDM symbols.			
Note 2: This refers to Thresh _{x, low} which is included in E-UTRA system				
information, and is a threshold for GSM target cell.				

Table 4.4. 2.5-2: Cell Specific Test requirement Parameters for Cell 2 GSM cell

Parameter	Unit	Cell 2 (GSM)		
Farameter	Onit	T1	T2	
Absolute RF Channel Number		ARFCN 1		
RXLEV	dBm	-90.00	-75.00	
RXLEV_ACCESS_MIN	dBm	-105		
MS_TXPWR_MAX_CCH	dBm	24		

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2.

The cell re-selection delay test requirement in this case is expressed as:

Cell re-selection delay = 4 * TmeasureGSM + TBCCH

TmeasureGSM = 6.4 s; as specified in TS 36.133 [4] clause 4.2.2.5

TBCCH = 1.9 s; as specified in TS 45.008 [15] clause 6.2

The cell re-selection delay shall be less than a total of [28 seconds] in this test case (note: this gives a total of 27.5 seconds but the test allows 28 seconds).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

4.5 E-UTRAN to HRPD Cell Re-Selection

4.5.1 E-UTRAN FDD - HRPD Cell re-selection

4.5.1.1 E-UTRAN FDD - HRPD Cell Reselection: HRPD is of Lower Priority

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The intra-frequency cell reselection criteria related to scaling of measurement rules parameters need to be specified when parameters are finalized
- The intra-frequency cell reselection criteria related to exact scaling parameters for different mobility states are undefined
- Measurement bandwidth (current assumption is 6RB) is undefined
- The "out of service" criteria is undefined
- The transmission scheme (1Tx or 2Tx) undefined
- The Message contents are undefined
- The Test system uncertainties applicable to this test are undefined
- Test tolerances have not yet been applied to the wanted and interfering signal levels

4.5.1.1.1 Test purpose

To verify that the UE is able to search and measure neighbouring HRPD cells and compare to the E-UTRA serving cell to meet the inter-RAT cell re-selection requirements.

4.5.1.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward that support HRPD

4.5.1.1.3 Minimum conformance requirements

In order to perform measurement and cell reselection to HRPD cell, the UE shall acquire the timing of HRPD cells.

When the measurement rules indicate that HRPD cells are to be measured, the UE shall measure CDMA2000 HRPD Pilot Strength of HRPD cells in the neighbour cell list at the minimum measurement rate specified in this section.

The parameter 'Number of HRPD Neighbour Frequency', which is transmitted on E-UTRAN BCCH, is the number of carriers used for all HRPD cells in the neighbour cell list.

When the RSRP of the E-UTRA serving cell (or other cells on the same frequency layer) is lower than 'HRPD Start Measuring E-UTRAN Rx Power Strength Threshold' and HRPD is of lower priority than the currently selected E-UTRAN frequency layer, the UE shall measure CDMA2000 HRPD Pilot Strength of the HRPD cells at least every (Number of HRPD Neighbour Frequency)* $T_{measure HRPD}$. In case HRPD is of higher priority than the currently selected E-

UTRAN frequency layer the UE shall measure HRPD cells at least every (Number of HRPD Neighbour Frequency)* $T_{higher_proirty_search}T_{higher_priority_measure}$. The parameter $T_{higher_proirty_search}T_{higher_priority_measure}$ is defined in section 4.2.2 of TS 36.133 [4].

The UE shall be capable of evaluating that the HRPD cell has met cell reselection criterion defined in TS 36.304 [6] within $T_{\text{evaluateHRPD}}$.

Table 4.2.2.5.4-1 of TS 36.133 [4] clause 4.2.2.5.4 gives values of TmeasureHRPD and TevaluateHRPD

4.5.1.1.4 Test description

4.5.1.1.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] Clause 4.3.1.

- Connect the SS (nodeB emulator) and AWGN noise source to the UE antenna connectors as shown in TS 36.508[7] Annex A Figure A.22
- 2. The general test parameter settings are set up according to Table 4.5.1.1.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 4.5.1.1.4.3
- 5. There is one E-UTRA FDD cell and one HRPD cell specified in the test. Cell 1(E-UTRA FDD cell) is the cell used for registration with the power level set according to Annex C.0 and C.1 for this test.

Table4.5.1.1.4.1-1: General Test Parameters for E-UTRAN FDD - lower priority HRPD Cell Re-selection

	Parameter	Unit	Value	Comment
Initial condition	Active cell		Cell 1	E-UTRAN FDD cell
	Neighbour cell		Cell 2	HRPD cell
Final condition	Active cell		Cell 2	HRPD cell is selecting during T2
DRX cycle length		S	1.28	
E-UTRA FDD RF	Channel Number		1	Only one FDD carrier frequency is used.
E-UTRA FDD Cha	E-UTRA FDD Channel Bandwidth (BW _{channel})		10	
HRPD RF Channel Number			1	Only one HRPD carrier
				frequency is used.
E-UTRA FDD PRA	ACH configuration		4	As specified in table 5.7.1-2 in TS 36.211
E_UTRA FDD Acc	cess Barring Information	-	Not Sent	No additional delays in random access procedure.
T1		S	30	
T2		S	30	

4.5.1.1.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The UE is requested to monitor the neighbouring cell on one HRPD cell. In the test there are two successive time periods, with time duration of T1 and T2 respectively.

Both E-UTRAN FDD cell 1 and HRPD cell 2 are already identified by the UE prior to the start of the test. At T1 the UE is camped on to cell 1. Cell 2 is of lower priority than cell 1. Cell 1 and Cell 2 belong to different tracking areas.

- 1. Ensure the UE is in State 2A according to TS 36.508 [7] clause 4.5.2A.
- 2. Set the parameters according to T1 in Table's 4.5.1.1.5-1 and 4.5.1.1.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.

- 3. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table's 4.5.1.1.5-1 and 4.5.1.1.5-2.
- 4. The SS waits for location update information from the UE to perform cell re-selection on Cell 2.
- 5. If the UE responds on Cell 2 during time duration T2 within 21 seconds from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 6. Repeat step 1-5 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

4.5.1.1.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 4.5.1.1.4.3-1: Common Exception messages

Default Message Contents	
	Table H.2.3-11
blocks exceptions	Table H.2.3-12
Default RRC messages and information	Table H.3.2-1
elements contents exceptions	

4.5.1.1.5 Test requirement

Tables 4.5.1.1.5-1 and 4.5.1.1.5-2 define the primary level settings including test tolerances for E-UTRAN FDD - HRPD cell re-selection test (HRPD cell is of lower priority).

Table 4.5.1.1.5-1: Cell Specific Test Parameters for E-UTRAN FDD (Cell # 1)

Parameter	Unit	Cell	1	
		T1	T2	
E-UTRA RF Channel number		1		
BW _{channel}	MHz	10		
OCNG Patterns defined in D.1.2 (OP.2		OP.2 F	FDD	
FDD)				
PBCH_RA	dB			
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB	0		
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA ^{Note 1}	dB			
OCNG_RB ^{Note 1}	dB			

N_{oc}	dBm/15 kHz	-	98	
RSRP	dBm/15 KHz	-89 + TT	-100+ TT	
\hat{E}_{s}/I_{ot}	dB	9+ TT	-2+ TT	
\hat{E}_s/N_{oc}	dB	9+TT	-2+TT	
Treselection _{EUTRAN}	S	0		
Snonintrasearch	dB	Not sent		
cellReselectionPriority	-	1		
Qrxlevmin	dBm	-140		
Qrxlevminoffset	dB	0		
Pcompensation	dB	0		
S _{Serving} Cell	dB	51 40		
Thresh _{serving, low}	dB	43		
Propagation Condition		AWGN		
			and the second	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Table A.4.5.1.1.1-3: Cell Specific Test Parameters for HRPD (cell # 2)

Parameter	Unit	Се	II 2	
		T1	T2	
HRPD RF Channel Number		•		
$\frac{\text{Control} E_{b}}{N_{t}} (38.4 \text{ kbps})$	dB	21		
$\frac{\text{Control} \text{E}_{\text{b}}}{\text{N}_{\text{t}}} \text{ (76.8 kbps)}$	dB	18		
\hat{I}_{or}/I_{oc}	dB	0 + TT	0 + TT	
I_{oc}	dBm/ 1.2288 MHz	-55		
CDMA2000 HRPD Pilot Strength	dB	-3 + TT	-3 + TT	
Propagation Condition		AW	GN	
S _{nonServingCell,x}		-6		
Treselection	S	0		
hrpd-CellReselectionPriority	-	0		
Thresh _{x, low}		-1	4	

The cell reselection delay to lower priority is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2 and starts to send access probe preambles on the Access Channel on cell 2.

The cell re-selection delay to the lower priority cell 2 shall be less than 21 s.

The cell re-selection delay to lower priority cell can be expressed as: $T_{evaluateHRPD} + T_{SI-HRPD}$

Where:

T_{evaluatHRPD} 19.2 s for 1.28 s DRX cycle as specified in TS 36.133 [4] Clause 4.2.2.5 Table 4.2.2.5.4-1

T_{SI-HRPD} Maximum repetition period of relevant system information blocks that need to be received by

the UE to camp on cell 2; 1280 ms is assumed in this test case.

This gives a total of 20.48 s for the lower priority cell reselection, allow 21 s in the test case.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

4.6 E-UTRAN to cdma2000 1xRTT Cell Re-Selection

4.6.1 E-UTRAN FDD - cdma2000 1xRTT Cell re-selection

4.6.1.1 E-UTRAN FDD - cdma2000 1x Cell Reselection: cdma2000 1X is of Lower Priority

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The intra-frequency cell reselection criteria related to scaling of measurement rules parameters need to be specified when parameters are finalized
- The intra-frequency cell reselection criteria related to exact scaling parameters for different mobility states are undefined
- Measurement bandwidth (current assumption is 6RB) is undefined
- The "out of service" criteria is undefined
- The transmission scheme (1Tx or 2Tx) undefined
- The Message contents are undefined
- The Test system uncertainties applicable to this test are undefined
- Test tolerances have not yet been applied to the wanted and interfering signal levels

4.6.1.1.1 Test purpose

To verify that the UE is able to search and measure neighbouring cdma2000 1xRTT cells and compare to the E-UTRA serving cell to meet the inter-RAT cell re-selection requirements when the cdma2000 1x is of lower priority.

4.6.1.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward that support cdma2000 1xRTT.

4.6.1.1.3 Minimum conformance requirements

In order to perform measurement and cell reselection to cdma2000 1X cell, the UE shall acquire the timing of cdma2000 1X cells.

When the measurement rules indicate that $cdma2000\ 1X$ cells are to be measured, the UE shall measure $cdma2000\ 1X$ RTT Pilot Strength of $cdma2000\ 1X$ cells in the neighbour cell list at the minimum measurement rate specified in this section.

The parameter 'Number of CDMA2000 1X Neighbour Frequency', which is transmitted on E-UTRAN BCCH, is the number of carriers used for all cdma2000 1X cells in the neighbour cell list.

When the RSRP of the E-UTRA serving cell (or other cells on the same frequency layer) is lower than 'CDMA2000 1X Start Measuring E-UTRAN Rx Power Strength Threshold' and cdma2000 1X is of lower priority than the currently selected E-UTRAN frequency layer, the UE shall measure Pilot Ec/Io of the CDMA2000 1X cells at least every (Number of CDMA2000 1X Neighbour Frequency)* $T_{\text{measureCDMA2000}}$ 1X. In case cdma2000 1X is of higher priority than the currently selected E-UTRAN frequency layer, the UE shall measure cdma2000 1X cells at least every (Number of CDMA2000 1X Neighbour Frequency)* $T_{\text{higher_priority_search}}T_{\text{higher_priority_measure}}$. The parameter $T_{\text{higher_priority_search}}T_{\text{higher_priority_measure}}$ is defined in section 4.2.2 of TS 36.133 [4].

The UE shall be capable of evaluating that the cdma2000 1X cell has met cell reselection criterion defined in TS 36.304 [6] within $T_{\text{evaluateCDMA2000 IX}}$.

Table 4.2.2.5.5-1 of TS 36.133 [4] clause 4.2.2.5.5 gives values of T_{measureCDMA2000 1X} and T_{evaluateCDMA2000 1X}.

4.6.1.1.4 Test description

4.6.1.1.4.1 Initial conditions

Test Environment: Normal as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] Clause 4.3.1.

- 1. Connect the SS (nodeB emulator) and AWGN noise source to the UE antenna connectors as shown in TS 36.508 [7] Annex A Figure A.22
- 2. The general test parameter settings are set up according to Table 4.6.1.1.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 4.6.1.1.4.3
- 5. There is one E-UTRA FDD cell and one CDMA2000 1xRTT cell specified in the test. Cell 1(E-UTRA FDD cell) is the cell used for registration with the power level set according to Annex C.0 and C.1 for this test.

Table 4.6.1.1.4.1-1: General Test Parameters for E-UTRAN FDD - lower priority cdma2000 1X Cell Reselection

	Parameter		Value	Comment
Initial condition	nitial condition		Cell 1	E-UTRAN FDD cell
	Neighbour cell		Cell 2	cdma2000 1X cell
Final condition	Active cell		Cell 2	cdma2000 1X cell is selecting during T2
DRX cycle length		S	1.28	
E-UTRA FDD RF Channel Number			1	Only one FDD carrier frequency is used.
E-UTRA FDD Channel Bandwidth (BW _{channel})		MHz	10	
cdma2000 1X RF Channel Number			1	Only one cdma2000 1X carrier frequency is used.
E-UTRA FDD PRACH configuration			4	As specified in table 5.7.1-2 in TS 36.211
E_UTRA FDD Access Barring Information		-	Not Sent	No additional delays in random access procedure.
T1		S	30	
T2		S	30	

4.6.1.1.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The UE is requested to monitor the neighbouring cell on one CDMA200 1xRTT cell. In the test there are two successive time periods, with time duration of T1 and T2 respectively.

Both E-UTRAN FDD cell 1 and CDMA2000 1xRTT cell 2 are already identified by the UE prior to the start of the test. At T1 the UE is camped on to cell 1. Cell2 is of lower priority than cell 1. Cell 1 and Cell 2 belong to different tracking areas.

- 1. Ensure the UE is in State 2A according to TS 36.508 [7] clause 4.5.2A.
- 2. Set the parameters according to T1 in Table's 4.6.1.1.5-1 and 4.6.1.1.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table's 4.6.1.1.5-1 and 4.6.1.1.5-2.
- 4. The SS waits for location update information from the UE to perform cell re-selection on Cell 2.

- 5. If the UE responds on Cell 2 during time duration T2 within 21 seconds from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 6. Repeat step 1-5 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

4.6.1.1.4.3 Message contents

Message contents are according to [clause FFS in reference FFS].

4.6.1.1.5 Test requirements

Tables 4.6.1.1.5-1 and 4.6.1.1.5-2 define the primary level settings including test tolerances for E-UTRAN FDD - cdma2000 1xRTT cell re-selection test (cdma2000 1x cell is of lower priority).

Table 4.6.1.1.5-1: Cell Specific Test Parameters for E-UTRAN FDD (Cell # 1)

Parameter	Unit	Ce	II 1			
		T1	T2			
E-UTRA RF Channel number		1				
BW _{channel}	MHz	10				
OCNG Patterns defined in D.1.2 (OP.2		OP.2	FDD			
FDD)						
PBCH_RA	dB					
PBCH_RB	dB					
PSS_RA	dB					
SSS_RA	dB					
PCFICH_RB	dB					
PHICH_RA	dB					
PHICH_RB	dB	()			
PDCCH_RA	dB					
PDCCH_RB	dB					
PDSCH_RA	dB					
PDSCH_RB	dB					
OCNG_RA ^{Note 1}	dB					
OCNG_RB ^{Note 1}	dB					
N _{oc} Note 2	dBm/15 kHz	-9	08			
RSRP Note 3	dBm/15 KHz	-89+ TT	-100+ TT			
\hat{E}_{s}/I_{ot}	dB	9+ TT	-2+ TT			
\hat{E}_s/N_{oc}	dB	9	-2			
Treselection _{EUTRAN}	S	()			
Snonintrasearch	dB	Not :	sent			
cellReselectionPriority	-	1				
Qrxlevmin	dBm	-14	40			
Qrxlevminoffset	dB	()			
Pcompensation	dB	()			
S _{ServingCell}	dB	51	40			
Thresh _{serving, low}	dB	4	3			
Propagation Condition		AW	GN			
Note 1: OCNC shall be used such that both calls are fully allocated and a constant total transmitted never						

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for $N_{\it oc}$ to be fulfilled.

Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Parameter Unit Cell 2 T1 **T2** cdma2000 1X RF Channel Number Pilot E_c dB [-7] I_{or} Sync E_c dB [-16] I_{or} Paging E_c (4.8 kbps) dB [-12] I_{or} \hat{I}_{or}/I_{oc} dB [0] + TT[0] + TTdBm/ 1.2288 I_{oc} -55 MHz CDMA2000 1xRTT Pilot Strength [-10] + TT dΒ [-10] + TTPropagation Condition AWGN [-20] SnonServingCell,x Treselection S 0 oneXRTT-CellReselectionPriority 0 Thresh_{x, low} [-28]

Table 4.6.1.1.5-2: Cell Specific Test Parameters for cdma2000 1X (cell # 2)

The cell reselection delay to lower priority is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2 and starts to send access probe preambles on the Access Channel on cell 2.

The cell re-selection delay to the lower priority cell 2 shall be less than 21 s.

The cell re-selection delay to lower priority cell can be expressed as: $T_{evaluatecdma2000~1X} + T_{SI-cdma2000~1X}$

Where:

 $T_{evaluatcdma2000 \, 1X}$ = 19.2 s for 1.28 s DRX cycle as specified in TS 36.133 [4] Clause 4.2.2.5 Table 4.2.2.5.5-1

T_{SI-cdma2000 1X} Maximum repetition period of relevant system information blocks that need to be received by the UE to camp on cell 2; 1280 ms is assumed in this test case.

This gives a total of 20.48 s for the lower priority cell reselection, allow 21 s in the test case.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

5 E-UTRAN RRC_CONNECTED State Mobility

When the UE is in RRC_CONNECTED state on a cell, network-controlled UE-assisted handovers are performed. The UE makes measurements of attributes of the serving and neighbour cells to enable the handover process. This process allows the UE to transfer a connection between the UE and current cell to target cell.

SS transmits PDSCH via PDCCH DCI format 1A for C_RNTI to transmit the DL RMC according to Annex A1. The SS sends downlink MAC padding bits on the DL RMC.

Due to the undefined UE behaviour regarding the sending of HARQ-ACK after receiving a RRC message triggering an handover (acc. 3GPP TS 36.331 [5] Subclause 5.3.5.4), the SS behaviour when waiting for the appropriate HARQ acknowledgement should be as follows:

- Reception of an HARQ-ACK will cause no HARQ delay exclusion (acc. subclause 3A.1).
- Reception of an HARQ-NACK will cause HARQ retransmission and HARQ delay exclusion (acc. subclause 3A.1).
- UE-DTX (as observed by SS) will cause HARQ retransmission, but no HARQ delay exclusion (acc. subclause 3A.1).

Uplink for E-UTRA cell(s) is configured according to Annex A.3.

5.1 E-UTRAN Handover

5.1.1 E-UTRAN FDD-FDD Handover intra frequency case

5.1.1.1 Test purpose

To verify the UE's ability to perform handover in RRC_CONNECTED state when an intra-frequency handover is commanded by meeting the UE maximum RRC procedure delay and interruption time requirements.

5.1.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

5.1.1.3 Minimum conformance requirements

The handover delay $D_{handover}$ shall be less than maximum RRC procedure delay + $T_{interrupt}$ in RRC_CONNECTED state.

When the UE receive a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ seconds from the end of the last TTI containing the RRC command.

Where:

D_{handover} equals the maximum RRC procedure delay defined in TS 36.331 [5] clause 11.2 plus the interruption time stated in TS 36.133 [4] clause 5.1.2.1.2.

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay. This requirement applies when UE is not required to perform any synchronisation procedure before transmitting on the new PRACH.

When intra-frequency handover is commanded, the interruption time shall be less than $T_{interrupt}$. The $T_{interrupt}$ equation is defined as:

$$T_{interrupt} \equiv T_{search} + T_{IU} + 20 \ ms$$

Where:

 T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then $T_{search} = 0$ ms. If the target cell is unknown and signal quality is sufficient for successful cell detection on the first attempt, then $T_{search} = 80$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

 T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in new cell. T_{IU} can be up to 30 ms.

NOTE: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

In the interruption requirement a cell is know if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in TS 36.133 [4] clause 8.1.2.2.1 for intra-frequency handover.

The normative reference for this requirement is TS 36.133 [4] clause 5.1.2.1 and A.5.1.1

5.1.1.4 Test description

5.1.1.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14.
- 2. The general test parameter settings are set up according to Table 5.1.1.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are defined in clause 5.1.1.4.3.
- 5. There is one E-UTRA FDD carrier and two cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 5.1.1.4.1-1: General Test Parameters for E-UTRAN FDD-FDD intra frequency handover test case

F	Parameter	Unit	Value	Comment
PDSCH par	PDSCH parameters		DL Reference Measurement	As specified in clause A.1.1
			Channel R.0 FDD	
PCFICH/PD	CCH/PHICH		DL Reference Measurement	As specified in clause A.2.1
parameters			Channel R.6 FDD	
Initial	Active cell		Cell 1	
conditions	Neighbouring cell		Cell 2	
Final	Active cell		Cell 2	
condition				
E-UTRA RF	Channel Number		1	Only one FDD carrier frequency is
				used.
Channel Ba	ndwidth (BW _{channel})	MHz	10	
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trig	gger	ms	0	
Filter coeffic	cient		0	L3 filtering is not used
DRX				OFF
CP length			Normal	
Access Barring Information		-	Not Sent	No additional delays in random
				access procedure.
PRACH configuration			4	As specified in table 5.7.1-2 in TS
				36.211[9]
Time offset between cells m		ms	3	Asynchronous cells
				3ms or 92160*Ts
T1		S	5	
T2		S	≤5	
T3		S	1	

5.1.1.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. T3 is defined as the end of the last TTI containing the RRC message implying handover.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 2. Set the parameters according to T1 in Table 5.1.1.5-1. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. The SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 5.1.1.5-1.
- 6. UE shall transmit a MeasurementReport message triggered by Event A3.

- 7. SS shall transmit an RRCConnectionReconfiguration message implying handover to Cell 2.
- 8. The start of T3 is the instant when the last TTI containing the RRC Connection reconfiguration message implying handover is sent to the UE, at that instant the SS shall switch the power setting from T2 to T3 as specified in Table 5.1.1.1.5-1.
- 9. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 10. If the UE transmits the uplink PRACH channel to Cell 2 less than 50 ms from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 11. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 12. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.
- 13. Repeat step 2-12 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.1.1.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 5.1.1.4.3-1: Common Exception messages for E-UTRAN FDD-FDD intra frequency handover test requirement

Default Message Contents	
Common contents of system information	
blocks exceptions	
Default RRC messages and information	Table H.3.1-1
elements contents exceptions	Table H.3.1-2
	Table H.3.1-7
	Table H.3.2-1

Table 5.1.1.4.3-2: ReportConfigEUTRA-A3: Additional E-UTRAN FDD-FDD intra frequency handover test requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table	le 4.6.6-6 ReportConfigEUTRA	-A3	
Information Element	Value/remark	Comment	Condition
ReportConfigEUTRA-A3 ::= SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset	0 (0 dB)	0 is actual value in dB (0 * 0.5 dB)	
reportOnLeave	FALSE		
}			
}			
Hysteresis	0 (0 dB)	0 is actual value in dB (0 * 0.5 dB)	
timeToTrigger	0 (0 ms)		
}			
}			

Table 5.1.1.4.3-3: MeasResults: Additional E-UTRAN FDD-FDD intra frequency handover test requirement

Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCellsCHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
•••			
}			
}			

Table 5.1.1.4.3-4: *MeasResultListEUTRA*: Additional E-UTRAN FDD-FDD intra frequency handover test requirement

Information Element	Value/remark	Comment	Condition
MeasResultListEUTRA::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId	PhysCellId		
cgi-Info SEQUENCE {			
cellGloballd	CellGlobalIdEUTRA		
trackingAreaCode	TrackingAreaCode		
plmn-IdentityList	Not present		
}			
measResult			
rsrpResult	Not present		
rsrqResult	Not present		
}			
}			

5.1.1.5 Test requirement

Tables 5.1.1.4.1-1 and 5.1.1.5-1 define the primary level settings including test tolerances for E-UTRAN FDD-FDD intra frequency handover test case.

Table 5.1.1.5-1: Cell Specific Test requirement Parameters for E-UTRAN FDD-FDD intra frequency handover test case

Parameter	Unit		Cell 1		Cell 2		
		T1	T2	Т3	T1	T2	T3
E-UTRA RF Channel			1			1	
Number							
BW _{channel}	MHz		10			10	
OCNG Patterns defined		OP.1 FDD	OP.1 FDD	OP.2 FDD	OP.2 FDD	OP.2 FDD	OP.1 FDD
in D.1.1 (OP.1 FDD)							
and in D.1.2 (OP.2							
FDD)							
PBCH_RA	dB						
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PCFICH_RB	dB						
PHICH_RA	dB						
PHICH_RB	dB		0			0	
PDCCH_RA	dB						
PDCCH_RB	dB						
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA ^{Note 1}	dB						
OCNG_RB ^{Note 1}	dB						
$\hat{E}_{\scriptscriptstyle{\mathrm{s}}}/I_{\scriptscriptstyle{\mathrm{ot}}}$	dB	8	-3.8	-3.8	-Infinity	2.86	2.86
N_{oc} Note 2	dBm/15 KHz	-98					
\hat{E}_s/N_{oc}	dB	8	8	8	- Infinity	11.5	11.5
RSRP Note 3	dBm/15 KHz	-90	-90	-90	- Infinity	-86.5	-86.5
Propagation Condition						•	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral					spectral		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{ac} to be fulfilled.

Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The handover delay is defined as the time from the beginning of time period T3, to the moment the UE start to transmit the PRACH to Cell 2.

The handover delay D_{handover} test requirement in this case is expressed as:

Handover delay $D_{handover} = maximum RRC$ procedure delay $+ T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{IU} + 20 \text{ ms}$$

 $T_{\text{search}} = 0$, since Cell 2 is known prior to the test

 T_{IU} = 15 ms, since 10 ms due to uncertainty in frame and 5 ms additional delay due to PRACH transmission occasion

Maximum RRC procedure delay = 15 ms as defined in TS 36.331 [5] clause 11.2

The handover delay $D_{handover}$ shall be less than a total of 50 ms in this test case (note: this gives a total of 15 ms for maximum RRC procedure delay plus 35 ms for $T_{interrupt}$).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

5.1.2 E-UTRAN TDD-TDD Handover intra frequency case

5.1.2.1 Test purpose

To verify the UE's ability to perform handover in RRC_CONNECTED state when an intra-frequency handover is commanded by meeting the UE maximum RRC procedure delay and interruption time requirements.

5.1.2.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

5.1.2.3 Minimum conformance requirements

The handover delay $D_{handover}$ shall be less than maximum RRC procedure delay + $T_{interrupt}$ in RRC_CONNECTED state.

When the UE receives a RRC message implying handover, the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ seconds from the end of the last TTI containing the RRC command.

Where:

 $D_{handover}$ equals the maximum RRC procedure delay defined in TS 36.331 [5] clause 11.2 plus the interruption time stated in TS 36.133 [4] clause 5.2.2.4.2.

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay. This requirement applies when UE is not required to perform any synchronisation procedure before transmitting on the new PRACH.

When intra-frequency handover is commanded, the interruption time shall be less than $T_{interrupt}$. The $T_{interrupt}$ equation is defined as:

$$T_{interrupt} = T_{search} + T_{IU} + 20 \text{ ms}$$

Where:

 T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then $T_{search} = 0$ ms. If the target cell is unknown and signal quality is sufficient for successful cell detection on the first attempt, then $T_{search} = 80$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

 T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in new cell. T_{IU} can be up to 30ms.

NOTE: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

In the interruption requirement a cell is know if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in TS 36.133 [4] clause 8.1.2.2.2 for intra-frequency handover.

The normative reference for this requirement is TS 36.133 [4] clause 5.2.2.4 and A.5.1.2.

5.1.2.4 Test description

5.1.2.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise source to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14.
- 2. The general test parameter settings are set up according to Table 5.1.2.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are defined in clause 5.1.2.4.3.
- 5. There is one E-UTRA TDD carrier and two cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 5.1.2.4.1-1: General Test Parameters for E-UTRAN TDD/TDD Intra Frequency Handover case

Par	ameter	Unit	Value	Comment
PDSCH parameters			DL Reference Measurement Channel R.0 TDD	As specified in Annex A.1.2
PCFICH/PDCCHP	PHICH parameters		DL Reference Measurement Channel R.6 TDD	As specified in Annex A.2.2
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
E-UTRA RF Chan	nel Number		1	Only one TDD carrier frequency is used.
Channel Bandwidt	h (BW _{channel})	MHz	10	
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		ms	0	
Filter coefficient			0	L3 filtering is not used
DRX				OFF
CP length			Normal	
Access Barring Inf	formation	-	Not Sent	No additional delays in random access procedure.
Special subframe	configuration		6	As specified in table 4.2-1 in TS 36.211
Uplink-downlink co	onfiguration		1	As specified in table 4.2-2 in TS 36.211
PRACH configurat	tion index		53	As specified in table 5.7.1-3 in TS 36.211
Time offset between	en cells	μs	3	Synchronous cells 3µs or 92*Ts
T1		S	5	
T2		S	≤5	
T3		S	1	

5.1.2.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. The start of T3 is defined as the end of the last TTI containing the RRC message implying handover.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 2. Set the parameters according to T1 in Table 5.1.2.5-1. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 5.1.2.5-1.
- 6. UE shall transmit a MeasurementReport message triggered by Event A3.

- 7. SS shall transmit an RRCConnectionReconfiguration message implying handover to Cell 2.
- 8. The start of T3 is the instant when the last TTI containing the RRC Connection reconfiguration message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T2 to T3 as specified in Table 5.1.2.1.5-1.
- 9. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 10. If the UE transmits the uplink PRACH channel to Cell 2 less than [45 ms] from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 11. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 12. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.
- 13. Repeat step 2-12 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.1.2.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 5.1.2.4.3-1: Common Exception messages for E-UTRAN TDD-TDD intra frequency handover test requirement

Default Message Contents	
Common contents of system information	
blocks exceptions	
Default RRC messages and information	Table H.3.1-1
elements contents exceptions	Table H.3.1-2
	Table H.3.1-7
	Table H.3.2-2

Table 5.1.2.4.3-2: ReportConfigEUTRA-A3: Additional E-UTRAN TDD-TDD intra frequency handover test requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table	le 4.6.6-6 ReportConfigEUTRA	-A3		
Information Element	Value/remark	Comment	Condition	
ReportConfigEUTRA-A3 ::= SEQUENCE {				
triggerType CHOICE {				
event SEQUENCE {				
eventId CHOICE {				
eventA3 SEQUENCE {				
a3-Offset	0 (0 dB)	0 is actual value in dB (0 * 0.5 dB)		
reportOnLeave	FALSE			
}				
}				
Hysteresis	0 (0 dB)	0 is actual value in dB (0 * 0.5 dB)		
timeToTrigger	0 (0 ms)			
}				
}				

Table 5.1.2.4.3-3: MeasResults: Additional E-UTRAN TDD-TDD intra frequency handover test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListEUTRA }	MeasResultListEUTRA		
}			

Table 5.1.2.4.3-4: *MeasResultListEUTRA*: Additional E-UTRAN TDD-TDD intra frequency handover test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListEUTRA::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId	PhysCellId of the Cell 2		
measResult			
rsrpResult		Set according to	
		specific test	
rsrqResult		Set according to	
		specific test	

}			
1}			

Table 5.1.2.4.3-5: RRCConnectionReconfiguration: E-UTRAN Measurement Configuration

Derivation Path: TS 36.508 [7] clause 4.6.1, Table 4.6.1-8 RRCConnectionReconfiguration						
Information Element	Value/remark	Comment	Condition			
RRCConnectionReconfiguration ::= SEQUENCE {						
Rrc-TransactionIdentifier	RRC-					
	TransactionIdentifier-DL					
criticalExtensions CHOICE {						
C1 CHOICE{						
rrcConnectionReconfiguration-r8 SEQUENCE {						
MobilityControlInfo						
	MobilityControlInfo-HO		НО			

5.1.2.5 Test requirement

Tables 5.1.2.4.1-1 and 5.1.2.5-1 define the primary level settings including test tolerances for E-UTRAN TDD/TDD Intra Frequency Handover test.

Table 5.1.2.5-1: Cell Specific Test requirement Parameters for E-UTRAN TDD/TDD Intra Frequency Handover case

Parameter	Unit		Cell 1			Cell 2	
		T1	T2	Т3	T1	T2	T3
E-UTRA RF Channel			1			1	
Number							
BW _{channel}	MHz		10			10	
OCNG Patterns defined		OP.1 TDD	OP.1 TDD	OP.2 TDD	OP.2 TDD	OP.2 TDD	OP.1 TDD
in D.2.1 (OP.1 TDD)							
and in D.2.2 (OP.2							
TDD)							
PBCH_RA	dB						
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PCFICH_RB	dB						
PHICH_RA	dB						
PHICH_RB	dB		0			0	
PDCCH_RA	dB						
PDCCH_RB	dB						
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA ^{Note}	dB						
OCNG_RB ^{Note}	dB						
$\hat{E}_{\scriptscriptstyle{\mathrm{s}}}/I_{\scriptscriptstyle{\mathrm{ot}}}$	dB	8	-3.8	-3.8	-Infinity	2.86	2.86
N_{oc}	dBm/15 KHz		-98				
\hat{E}_s/N_{oc}	dB	8	8	8	- Infinity	11.5	11.5
RSRP	dBm/15 KHz	-90	-90	-90	- Infinity	-86.5	-86.5
Propagation Condition		AWGN					
Note: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral							
	eved for all OFD		•			•	•

The handover delay is defined as the time from the beginning of time period T3, to the moment the UE start to transmit the PRACH to Cell 2.

The handover delay D_{handover} test requirement in this case is expressed as:

 $Handover\ delay\ D_{handover} = maximum\ RRC\ procedure\ delay\ +\ T^{interrupt}$

The maximum RRC procedure delay test requirement in this case is 15ms, as specified in TS 36.331 [5] clause 11.2.

The $T_{interrupt}$ test requirement in this case is 35 ms expressed as:

$$T_{interrupt} \equiv T_{search} + T_{IU} + 20 \ ms$$

 $T_{\text{search}} = 0$, since cell 2 is known prior to the test

 $T_{\text{IU}} = 15 \text{ ms}$, since 10 ms due to uncertainty in frame and 5 ms additional delay due to PRACH transmission occasion

The handover delay $D_{handover}$ shall be less than a total of 50 ms in this test case (note: this gives a total of 15 ms for maximum RRC procedure delay plus 35 ms for $T_{interrupt}$).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

5.1.3 E-UTRAN FDD-FDD Handover inter frequency case

5.1.3.1 Test purpose

To verify the UE's ability to perform handover in RRC_CONNECTED state when an inter-frequency handover is commanded by meeting the UE maximum RRC procedure delay and interruption time requirements.

5.1.3.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

5.1.3.3 Minimum conformance requirements

The handover delay $D_{handover}$ shall be less than maximum RRC procedure delay + $T_{interrupt}$ in RRC_CONNECTED state.

When the UE receive a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ seconds from the end of the last TTI containing the RRC command.

Where:

 $D_{handover}$ equals the maximum RRC procedure delay defined in TS 36.331 [5] clause 11.2 plus the interruption time stated in TS 36.133 [4] clause 5.1.2.1.2.

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay. This requirement applies when UE is not required to perform any synchronisation procedure before transmitting on the new PRACH.

When inter-frequency handover is commanded, the interruption time shall be less than $T_{interrupt}$. The $T_{interrupt}$ equation is defined as:

$$T_{interrupt} \equiv T_{search} + T_{IU} + 20 \ ms$$

Where:

 T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then $T_{search} = 0$ ms. If the target cell is unknown and signal quality is sufficient for successful cell detection on the first attempt, then $T_{search} = 80$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

 T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to 30 ms.

NOTE: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

In the interruption requirement a cell is know if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in TS 36.133 [4] clause 8.1.2.3.1 for inter-frequency handover.

Inter-frequency measurement requirements rely on the UE being configured with one measurement gap pattern. UEs shall only support those measurement gap patterns listed in TS 36.133 [4] Table 8.1.2.1-1 that are relevant to its measurement capabilities.

The normative reference for this requirement is TS 36.133 [4] clause 5.1.2.1 and A.5.2.1.

5.1.3.4 Test description

5.1.3.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14.
- 2. The general test parameter settings are set up according to Table 5.1.3.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are defined in clause 5.1.3.4.3.
- 5. There are two E-UTRA FDD carriers and one cell on each carrier specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 5.1.3.4.1-1: General Test Parameters for E-UTRAN FDD-FDD inter frequency handover test case

F	Parameter	Unit	Value	Comment
PDSCH para	ameters		DL Reference Measurement Channel R.0 FDD	As specified in clause A.1.1
PCFICH/PD	CCH/PHICH		DL Reference Measurement	As specified in clause A.2.1
parameters			Channel R.6 FDD	
Initial	Active cell		Cell 1	Cell 1 is on RF channel number 1
conditions	Neighbour cell		Cell 2	Cell 2 is on RF channel number 2
Final condition	Active cell		Cell 2	
E-UTRA RF	channel number		1, 2	Two FDD carriers are used
Channel Ba	ndwidth (BW _{channel})	MHz	10	
Gap Pattern	ld		1	As specified in 3GPP TS 36.133[4] section 8.1.2.1.
A3-Offset		dB	-4	
Hysteresis		dB	0	
TimeToTrigg	ger	Ms	0	
Filter coeffic	eient		0	L3 filtering is not used
DRX			DRX_L	As specified in Table 5.1.3.5-2
PRACH con	figuration		4	As specified in table 5.7.1-2 in 3GPP TS 36.211 [9]
Access Barr	ring Information	-	Not sent	No additional delays in random access procedure
Time offset	between cells	3	ms	Asynchronous cells 3ms or 92160*Ts
Gap pattern configuration Id			0	As specified in Table 8.1.2.1-1 in 3GPP TS 36.133 [4] started before T2 starts
T1		S	5	
T2		S	≤5	
T3		S	1	

5.1.3.4.2 Test procedure

The test consists of one active cell and one neighbour cell. PDCCHs indicating new transmissions should be sent continuously to ensure that the UE would not enter the DRX state. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. T3 is defined as the end of the last TTI containing the RRC message implying handover.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell
- 2. Set the parameters according to T1 in Table 5.1.3.5-1. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.

- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 5.1.3.5-1.
- 6. UE shall transmit a MeasurementReport message triggered by Event A3.
- 7. SS shall transmit an RRCConnectionReconfiguration message implying handover to Cell 2.
- 8. The start of T3 is the instant when the last TTI containing the RRC connection reconfiguration message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T2 to T3 as specified in Table 5.1.3.5-1.
- 9. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 10. If the UE transmits the uplink PRACH channel to Cell 2 less than 50 ms from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 11. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 12. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.
- 13. Repeat step 2-12 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.1.3.4.3 Message contents

Message contents are according to TS 36.508 [7] values 4.6 with the following exceptions:

Table 5.1.3.4.3-1: Common Exception messages for E-UTRAN FDD-FDD inter-frequency handover test requirement

Default Message Contents	
Common contents of system information	
blocks exceptions	
Default RRC messages and information	Table H.3.1-1
elements contents exceptions	Table H.3.1-3
·	Table H.3.1-7
	Table H.3.2-1
	Table H.3.6-2

Table 5.1.3.4.3-2: ReportConfigEUTRA-A3: Additional E-UTRAN FDD-FDD inter frequency handover test requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-6 ReportConfigEUTRA-A3						
Information Element	Value/remark	Comment	Condition			
ReportConfigEUTRA-A3 ::= SEQUENCE {						
triggerType CHOICE {						
event SEQUENCE {						
eventId CHOICE {						
eventA3 SEQUENCE {						
a3-Offset	-8 (-4 dB)	-4 is actual value in dB (-8 * 0.5 dB)				
reportOnLeave	FALSE					
}						
}						
Hysteresis	0 (0 dB)	0 is actual value in dB (0 * 0.5 dB)				
timeToTrigger	0 (0 ms)					
}						
}						

Table 5.1.3.4.3-3: *MeasResults*: Additional E-UTRAN FDD-FDD inter frequency handover test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
···			
}			

Table 5.1.3.4.3-4: MeasResultListEUTRA: Additional E-UTRAN FDD-FDD inter frequency handover test requirement

Information Element	Value/remark	Comment	Condition
MeasResultListEUTRA::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId	PhysCellId		
cgi-Info SEQUENCE {			
cellGloballd	CellGlobalIdEUTRA		
trackingAreaCode	TrackingAreaCode		
plmn-IdentityList	Not present		
}	·		
measResult			
rsrpResult	Not present		
rsrqResult	Not present		
	·		
}			
}			

5.1.3.5 Test requirement

Tables 5.1.3.4.1-1, 5.1.3.5-1, and 5.1.3.5-2 define the primary level settings including test tolerances for E-UTRAN FDD-FDD inter frequency handover test case.

Table 5.1.3.5-1: Cell Specific Test requirement Parameters for E-UTRAN FDD-FDD inter frequency handover test case

Parameter	Unit		Cell 1			Cell 2	
		T1	T2	T3	T1	T2	Т3
E-UTRA RF Channel			1			2	
number							
BW _{channel}	MHz		10			10	
OCNG Patterns defined		OP.1	OP.1 FDD	OP.2 FDD	OP.2 FDD	OP.2 FDD	OP.1 FDD
in D.1.1 (OP.1 FDD)		FDD					
and in D.1.2 (OP.2							
FDD)							
PBCH_RA	dB						
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PCFICH_RB	dB						
PHICH_RA	dB						
PHICH_RB	dB		0			0	
PDCCH_RA	dB						
PDCCH_RB	dB						
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA ^{Note 1}	dB						
OCNG_RB ^{Note 1}	dB						
\hat{E}_s/I_{ot}	dB	4	4	4	-Infinity	7.10	7.10
$N_{oc}^{ m Note~2}$	dBm/15 kHz	-98					
\hat{E}_s/N_{oc}	dB	4	4	4	-Infinity	7.10	7.10
RSRP Note 3	dBm/15 KHz	-94	-94	-94	-Infinity	-90.9	-90.9
Propagation Condition			AWGN				
Note 1: OCNG shall be	used such that h	oth calls ar	a fully allocate	nd and a cons	tant total trans	mitted nower	enectral

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{ac} to be fulfilled.

Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 5.1.3.5-2: Reference DRX-Configuration to be used in E-UTRAN FDD-FDD inter frequency handover test case

Parameter	Value	Comments			
Reference configuration	DRX_L	As defined in 4.8.2.1.5 in TS 36.508 [7.]			
onDurationTimer	psf6				
drx-InactivityTimer	psf1920				
drx-RetransmissionTimer	sf16				
longDRX-CycleStartOffset	sf1280, 0				
shortDRX	disabled				
Note: For further information see section 6.3.2 in 3GPP TS 36.331 [5].					

The handover delay is defined as the time from the beginning of time period T3, to the moment the UE start to transmit the PRACH to Cell 2.

The handover delay D_{handover} test requirement in this case is expressed as:

 $Handover\ delay\ D_{handover} = maximum\ RRC\ procedure\ delay\ +\ T_{\mbox{interrupt}}$

 $T_{interrupt} = T_{search} + T_{IU} + 20 \text{ ms}$

 $T_{\text{search}} = 0$, since Cell 2 is known prior to the test

 $T_{IU} = 15$ ms, since 10 ms due to uncertainty in frame and 5 ms additional delay due to PRACH transmission occasion

Maximum RRC procedure delay = 15 ms as defined in TS 36.331 [5] clause 11.2

The handover delay $D_{handover}$ shall be less than a total of 50 ms in this test case (note: this gives a total of 15 ms for maximum RRC procedure delay plus 35 ms for $T_{interrupt}$).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

5.1.4 E-UTRAN TDD-TDD Handover inter frequency case

5.1.4.1 Test purpose

To verify the UE's ability to perform handover in RRC_CONNECTED state when an inter-frequency handover is commanded by meeting the UE maximum RRC procedure delay and interruption time requirements.

5.1.4.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

5.1.4.3 Minimum conformance requirements

The handover delay $D_{handover}$ shall be less than maximum RRC procedure delay + $T_{interrupt}$ in RRC_CONNECTED state.

When the UE receives a RRC message implying handover, the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ seconds from the end of the last TTI containing the RRC command.

Where:

 $D_{handover}$ equals the maximum RRC procedure delay defined in TS 36.331 [5] clause 11.2 plus the interruption time stated in TS 36.133 [4] clause 5.2.2.4.2.

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay. This requirement applies when UE is not required to perform any synchronisation procedure before transmitting on the new PRACH.

When inter-frequency handover is commanded, the interruption time shall be less than $T_{interrupt}$. The $T_{interrupt}$ equation is defined as:

$$T_{interrupt} = T_{search} + T_{IU} + 20 \text{ ms}$$

Where:

 T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then $T_{search} = 0$ ms. If the target cell is unknown and signal quality is sufficient for successful cell detection on the first attempt, then $T_{search} = 80$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

 T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in new cell. T_{IU} can be up to 30ms.

NOTE: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

In the interruption requirement a cell is know if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in TS 36.133 [4] clause 8.1.2.3.4 for inter-frequency handover.

The normative reference for this requirement is TS 36.133 [4] clause 5.2.2.4 and A.5.1.4

5.1.4.4 Test description

5.1.4.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise source to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14.
- 2. The general test parameter settings are set up according to Table 5.1.4.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are defined in clause 5.1.4.4.3.
- 5. There are two E-UTRA TDD carriers and one cell on each carrier specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 5.1.4.4.1-1: General Test Parameters for E-UTRAN TDD-TDD inter frequency handover test case

ı	Parameter	Unit	Value	Comment
PDSCH parameters			DL Reference Measurement Channel R.0 TDD	As specified in clause A.1.2
PCFICH/PD	PCFICH/PDCCH/PHICH		DL Reference Measurement	As specified in clause A.2.2
parameters			Channel R.6 TDD	n to opposition in clause i ii.2.2
Initial	Active cell		Cell 1	Cell 1 is on RF channel number 1
conditions	Neighbour cell		Cell 2	Cell 2 is on RF channel number 2
Final	Active cell		Cell 2	
condition				
	channel number		1, 2	Two TDD carriers are used
	ndwidth (BW _{channel})	MHz	10	
A3-Offset		dB	-4	
Hysteresis		dB	0	
TimeToTrig		Ms	0	
Filter coeffic	cient		0	L3 filtering is not used
DRX			DRX_L	As specified in Table 5.1.4.5-2
PRACH cor	figuration		53	As specified in table 5.7.1-3 in TS 36.211
Access Bar	ring Information	-	Not sent	No additional delays in random access procedure
Special sub	frame configuration		6	As specified in table 4.2-1 in TS 36.211
Uplink-dowr	nlink configuration		1	As specified in table 4.2-2 in TS 36.211
Time offset	between cells	μs	3	Synchronous cells 3µs or 92*Ts
Gap pattern	configuration Id		1	As specified in Table 8.1.2.1-1 in 3GPP TS 36.133 [4] started before T2 starts
T1		S	5	12 Starts
T2		S	<u>5</u> ≤5	
T3		S	1	
		J	•	

Table 5.1.4.4.1-2: Void

5.1.4.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information

of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. The start of T3 is defined as the end of the last TTI containing the RRC message implying handover.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 2. Set the parameters according to T1 in Table 5.1.4.5-1. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 5.1.4.5-1.
- 6. UE shall transmit a MeasurementReport message triggered by Event A3.
- 7. SS shall transmit an RRCConnectionReconfiguration message implying handover to Cell 2.
- 8. The start of T3 is the instant when the last TTI containing the RRC connection reconfiguration message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T2 to T3 as specified in Table 5.1.3.5-1.
- 9. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 10. If the UE transmits the uplink PRACH channel to Cell 2 less than 50 ms from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 11. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 12. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.
- 13. Repeat step 2-12 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.1.4.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 5.1.4.4.3-1: Common Exception messages for E-UTRAN TDD-TDD inter-frequency handover test requirement

Default Message Contents	
Common contents of system information	
blocks exceptions	
Default RRC messages and information	Table H.3.1-1
elements contents exceptions	Table H.3.1-3
	Table H.3.1-7
	Table H.3.2-2
	Table H.3.6-2

Table 5.1.4.4.3-2: ReportConfigEUTRA-A3: Additional E-UTRAN TDD-TDD inter frequency handover test requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table	4.6.6-6 ReportConfigEUTRA	-A3	
Information Element	Value/remark	Comment	Condition
ReportConfigEUTRA-A3 ::= SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset	-8 (-4 dB)	-4 is actual value in dB (-8 * 0.5 dB)	
reportOnLeave	FALSE		
}			
}			
Hysteresis	0 (0 dB)	0 is actual value in dB (0 * 0.5 dB)	
timeToTrigger	0 (0 ms)		
}			
}			

Table 5.1.4.4.3-3: *MeasResults*: Additional E-UTRAN TDD-TDD inter frequency handover test requirement

Information Element	Value/remark	Comment	Condition
MeasResults::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListEUTRA }	MeasResultListEUTRA		

Table 5.1.4.4.3-4: MeasResultListEUTRA: Additional E-UTRAN TDD-TDD inter frequency handover test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListEUTRA::= SEQUENCE (SIZE (1maxCellReport)) OF SEQUENCE {			
physCellId	PhysCellId of the Cell 2		
cgi-Info SEQUENCE {			
cellGloballd	CellGlobalIdEUTRA		
trackingAreaCode	TrackingAreaCode		
plmn-IdentityList	Not present		
}			
measResult			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
]}			

Table 5.1.4.4.3-5: RRCConnectionReconfiguration: E-UTRAN Measurement Configuration

Derivation Path: TS 36.508 [7] clause 4.6.1, Table 4.6.1-8 RRCConnectionReconfiguration					
Information Element	Value/remark	Comment	Condition		
RRCConnectionReconfiguration ::= SEQUENCE {					
Rrc-TransactionIdentifier	RRC-				
	TransactionIdentifier-DL				
criticalExtensions CHOICE {					
C1 CHOICE{					
rrcConnectionReconfiguration-r8 SEQUENCE {					
MobilityControlInfo					
	MobilityControlInfo-HO		НО		

5.1.4.5 Test requirement

Tables 5.1.4.4.1-1 and 5.1.4.5-1 define the primary level settings including test tolerances for E-UTRAN TDD/TDD Inter Frequency Handover test.

Table 5.1.4.5-1: Cell Specific Test requirement Parameters for E-UTRAN TDD/TDD Inter Frequency Handover case

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	Т3	T1	T2	T3
E-UTRA RF Channel			1			2	
Number							
BW _{channel}	MHz		10			10	
OCNG Patterns defined		OP.1 TDD	OP.1 TDD	OP.2 TDD	OP.2 TDD	OP.2 TDD	OP.1 TDD
in TS 36.133 [4] D.2.1							
(OP.1 TDD) and in							
D.2.2 (OP.2 TDD)							
PBCH_RA	dB						
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PCFICH_RB	dB						
PHICH_RA	dB						
PHICH_RB	dB		0			0	
PDCCH_RA	dB						
PDCCH_RB	dB						
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA ^{Note}	dB						
OCNG_RB ^{Note}	dB						
$\hat{\mathbf{E}}_{\mathrm{s}}/\mathbf{I}_{\mathrm{ot}}$	dB	4	4	4	-Infinity	7.10	7.10
N_{oc}	dBm/15 KHz	-98					
\hat{E}_s/N_{oc}	dB	4	4	4	-Infinity	7.10	7.10
RSRP	dBm/15 KHz	-94	-94	-94	- Infinity	-90.9	-90.9
Propagation Condition			•		WGN	•	•
	used such that	both cells ar	e fully alloca	ted and a co	nstant total trai	nsmitted power	er spectral

Note: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Table 5.1.4.5-2: Reference DRX-Configuration to be used in E-UTRAN TDD-TDD inter frequency handover test case

Parameter	Value	Comments		
Reference configuration	DRX_L	As defined in 4.8.2.1.5 in TS 36.508 [7.]		
onDurationTimer	psf6			
drx-InactivityTimer	psf1920			
drx-RetransmissionTimer	sf16			
longDRX-CycleStartOffset	sf1280, 0			
shortDRX	disabled			
Note: For further information see section 6.3.2 in 3GPP TS 36.331 [5].				

The handover delay is defined as the time from the beginning of time period T3, to the moment the UE start to transmit the PRACH to Cell 2.

The handover delay D_{handover} test requirement in this case is expressed as:

Handover delay $D_{bandover} = maximum RRC$ procedure delay $+ T_{interrupt}$

The maximum RRC procedure delay test requirement in this case is 15ms, as specified in TS 36.331 [5] clause 11.2.

The T_{interrupt} test requirement in this case is 35 ms expressed as:

$$T_{interrupt} \equiv T_{search} + T_{IU} + 20 \ ms$$

 $T_{\text{search}} = 0$, since cell 2 is known prior to the test

 T_{IU} = 15 ms, since 10 ms due to uncertainty in frame and 5 ms additional delay due to PRACH transmission occasion

The handover delay D_{handover} shall be less than a total of 50 ms in this test case.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

5.1.5 E-UTRAN FDD-FDD inter frequency Handover: unknown target cell

5.1.5.1 Test purpose

To verify the UE's ability to perform handover in RRC_CONNECTED state when an inter-frequency handover: unknown target cell is commanded by meeting the handover to an unknown target cell delay requirements.

5.1.5.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

5.1.5.3 Minimum conformance requirements

The handover delay $D_{handover}$ shall be less than maximum RRC procedure delay + $T_{interrupt}$ in RRC_CONNECTED state.

When the UE receive a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ seconds from the end of the last TTI containing the RRC command.

Where:

 $D_{handover}$ equals the maximum RRC procedure delay defined in TS 36.331 [5] clause 11.2 plus the interruption time stated in TS 36.133 [4] clause 5.1.2.1.2.

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay. This requirement applies when UE is not required to perform any synchronisation procedure before transmitting on the new PRACH.

When inter-frequency handover is commanded, the interruption time shall be less than $T_{interrupt}$. The $T_{interrupt}$ equation is defined as:

$$T_{interrupt} = T_{search} + T_{IU} + 20 \text{ ms}$$

Where:

 T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then $T_{search} = 0$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

 T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to 30 ms.

NOTE: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

In the interruption requirement a cell is know if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in TS 36.133 [4] clause 8.1.2.3.1 for inter-frequency handover.

Inter-frequency measurement requirements rely on the UE being configured with one measurement gap pattern. UEs shall only support those measurement gap patterns listed in TS 36.133 [4] Table 8.1.2.1-1 that are relevant to its measurement capabilities.

The normative reference for this requirement is TS 36.133 [4] clause 5.1.2.1 and A.5.1.5.

5.1.5.4 Test description

5.1.5.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14.
- 2. The general test parameter settings are set up according to Table 5.1.5.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are defined in clause 5.1.5.4.3.
- 5. There are two E-UTRA FDD carriers and one cell on each carrier specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 5.1.5.4.1-1: General Test Parameters for E-UTRAN FDD-FDD inter frequency handover: unknown target cell test case

Para	ameter	Unit	Value	Comment
PDSCH parameters			DL Reference Measurement Channel R.0 FDD	As specified in section A.1.1
PCFICH/PDCCH/PHICH parameters			DL Reference Measurement Channel R.6 FDD	As specified in section A.2.1
Initial conditions	Active cell		Cell 1	Cell 1 is on RF channel number 1
	Neighbouring cell		Cell 2	Cell 2 is on RF channel number 2
Final condition	Active cell		Cell 2	
E-UTRA RF chann	el number		1, 2	Two FDD carriers are used
Channel Bandwidtl	Channel Bandwidth (BW _{channel})		10	
DRX			OFF	Non-DRX test
PRACH configuration	ion		4	As specified in table 5.7.1-2 in 3GPP TS 36.211 [9]
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between	en cells		3 ms	Asynchronous cells 3ms or 92160*Ts
T1		S	≤5	
T2		S	1	

5.1.5.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE may not have any timing information of Cell 2. A RRC message implying handover shall be sent to the UE during period T1. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. Starting T2, Cell 2 becomes detectable and the UE receives a RRC handover command from the network.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 2. Set the parameters according to T1 in Table 5.1.5.5-1. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfigurationmessage implying handover to Cell 2.
- 4. The start of T2 is the instant when the last TTI containing the RRC connection reconfiguration message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T1 to T2 as specified in Table 5.1.5.5-1. T2 starts.
- 5. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 6. If the UE transmits the uplink PRACH channel to Cell 2 less than 130 ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 7. After T2 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell..
- 8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.
- 9. Repeat step 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.1.5.4.3 Message contents

Message contents are according to TS 36.508 [7] values 4.6 with the following exceptions:

Table 5.1.5.4.3-1: Common Exception messages for E-UTRAN FDD-FDD inter-frequency handover: unknown target cell test requirement

Default Message Contents	
Common contents of system information	
blocks exceptions	
Default RRC messages and information	Table H.3.2-1
elements contents exceptions	

Table 5.1.5.4.3-2: RRCConectionReconfiguration: Additional E-UTRAN FDD-FDD inter frequency handover: unknown target cell test requirement

Derivation Path: TS 36.508 [7] clause 4.6.1, Table 4.6 Information Element	Value/remark	Comment	Condition
RRCConnectionReconfiguration ::= SEQUENCE {			
rrc-TransactionIdentifier	RRC-		
	TransactionIdentifier-DL		
criticalExtensions CHOICE {			
c1 CHOICE{			
rrcConnectionReconfiguration-r8 SEQUENCE {			
mobilityControlInfo	MobilityControlInfo-HO		НО
}			
}			
}			
}			

5.1.5.5 Test requirement

Tables 5.1.5.4.1-1 and 5.1.5.5-1define the primary level settings including test tolerances for E-UTRAN FDD-FDD inter frequency handover: unknown target cell test.

Table 5.1.5.5-1: Cell Specific Test requirement Parameters for E-UTRAN FDD-FDD inter frequency handover: unknown target cell test case

Parameter	Unit	Cell	11	Cel	12
		T1	T2	T1	T2
E-UTRA RF Channel		1		2	
number					
BW _{channel}	MHz	10)	10)
OCNG Patterns defined in D.1.1 (OP.1 FDD) and in D.1.2 (OP.2 FDD)		OP.1 FDD	OP.2 FDD	OP.2 FDD	OP.1 FDD
PBCH_RA	dB				
PBCH_RB	dB				
PSS_RA	dB				
SSS_RA	dB				
PCFICH_RB	dB				
PHICH_RA	dB				
PHICH_RB	dB	0		0	
PDCCH_RA	dB				
PDCCH_RB	dB				
PDSCH_RA	dB				
PDSCH_RB	dB				
OCNG_RA ^{Note 1}	dB				
OCNG_RB ^{Note 1}	dB				

\hat{E}_s/I_{ot}	dB	4	4	-Infinity	7
N _{oc} Note 2	dBm/15 kHz			-98	
\hat{E}_s/N_{oc}	dB	4	4	-Infinity	7
RSRP Note 3	dBm/15 KHz	-94	-94	-Infinity	-91
Propagation Condition				AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over

subcarriers and time and shall be modelled as AWGN of appropriate power for $N_{\it oc}$ to be fulfilled.

Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The handover to an unknown target cell delay is defined as the time from the beginning of time period T2, to the moment the UE start to transmit the PRACH to Cell 2.

The handover delay $D_{handover}$ test requirement in this case is expressed as:

 $Handover \ delay \ D_{handover} = maximum \ RRC \ procedure \ delay + T_{interrupt} \ (note: the \ target \ cell \ is \ unknown)$

$$T_{interrupt} \equiv T_{search} + T_{IU} + 20 \ ms$$

T_{search} = 80, since Cell 2 is unknown prior to the test

 $T_{IU} = 15 \text{ ms}$, since 10 ms due to uncertainty in frame and 5 ms additional delay due to PRACH transmission occasion

Maximum RRC procedure delay = 15 ms as defined in TS 36.331 [5] clause 11.2

The handover delay $D_{handover}$ to an unknown target cell shall be less than a total of 130 ms in this test case (note: this gives a total of 15 ms for maximum RRC procedure delay plus 115 ms for $T_{interrupt}$).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

5.1.6 E-UTRAN TDD-TDD inter frequency handover: unknown target cell

5.1.6.1 Test purpose

To verify the UE's ability to perform handover in RRC_CONNECTED state when the target cell is unknown and an inter-frequency handover is commanded by meeting the UE maximum RRC procedure delay and interruption time requirements.

5.1.6.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

5.1.6.3 Minimum conformance requirements

Procedure delays for all procedures that can command a handover are specified in 3GPP TS 36.331 [2].

When the UE receive a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ seconds from the end of the last TTI containing the RRC command.

Where:

 $D_{handover}$ equals the maximum RRC procedure delay defined in TS 36.331 [5] clause 11.2 plus the interruption time stated in TS 36.133 [4] clause 5.2.2.4.2.

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay. This requirement applies when UE is not required to perform any synchronisation procedure before transmitting on the new PRACH.

When inter-frequency handover is commanded, the interruption time shall be less than Tinterrupt.

$$T_{interrupt} = T_{search} + T_{IU} + 20 \text{ ms}$$

Where:

 T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then $T_{search} = 0$ ms. If the target cell is unknown and signal quality is sufficient for successful cell detection on the first attempt, then $T_{search} = 80$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

 T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in new cell. T_{IU} can be up to 30ms.

NOTE: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in TS 36.133 [4] clause 8.1.2.3.4 for inter-frequency handover.

The normative reference for this requirement is TS 36.133 [4] clause 5.2.2.4 and A.5.1.4

5.1.6.4 Test description

5.1.6.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise source to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14.
- 2. The general test parameter settings are set up according to Table 5.1.6.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are defined in clause 5.1.6.4.3.
- 5. There are two E-UTRA TDD carriers and one cell on each carrier specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 5.1.6.4.1-1: General test parameters for E-UTRAN TDD-TDD inter frequency handover test case when the target cell is unknown

Par	ameter	Unit	Value	Comment
PDSCH parameters			DL Reference Measurement Channel R.0 TDD	As specified in section A.2.1
PCFICH/PDCCHPHICH parameters			DL Reference Measurement Channel R.6 TDD	As specified in section A.2.2
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
E-UTRA RF Chan	nel Number		1, 2	Two TDD carriers
DRX			OFF	Non-DRX test
Access Barring Inf	Access Barring Information		Not Sent	No additional delays in random access procedure.
Special subframe configuration			6	As specified in table 4.2-1 in TS 36.211
Uplink-downlink configuration			1	As specified in table 4.2-2 in TS 36.211
PRACH configuration index			53	As specified in table 5.7.1-3 in TS 36.211
Time offset between cells		μs	3	Synchronous cells
				3μs or 92*Ts
Gap pattern configuration			-	No gap pattern configured
T1		S	≤5	
T2		s	1	

5.1.6.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 2. Set the parameters according to T1 in Table 5.1.6.5-1. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message implying handover to Cell 2.
- 4. The start of T2 is the instant when the last TTI containing the RRC connection reconfiguration message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T1 to T2 as specified in Table 5.1.6.5-1. T2 starts.
- 5. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 6. If the UE transmits the uplink PRACH channel to Cell 2 less than 130 ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 7. After T2 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.
- 9. Repeat step 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.1.6.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 5.1.6.4.3-1: Common Exception messages for E-UTRAN TDD-TDD inter frequency handover unknown target cell test requirements

Default Message Contents	
Common contents of system information	
blocks exceptions	
Default RRC messages and information	Table H.3.2-2
elements contents exceptions	

Table 5.1.6.4.3-2: RRCConnectionReconfiguration: Additional E-UTRAN TDD-TDD inter frequency handover: unknown target cell test requirement

Derivation Path: TS 36.508 [7] clause 4.6.1, Table 4.6.1-8 RRCConnectionReconfiguration				
Information Element	Value/remark	Comment	Condition	
RRCConnectionReconfiguration ::= SEQUENCE {				
Rrc-TransactionIdentifier	RRC-			
	TransactionIdentifier-DL			
criticalExtensions CHOICE {				
C1 CHOICE{				
rrcConnectionReconfiguration-r8 SEQUENCE {				
mobilityControlInfo	MobilityControlInfo-HO		НО	
}				
}				
}				
}				

5.1.6.5 Test requirement

Tables 5.1.6.4.1-1 and 5.1.6.5-1 define the primary level settings including test tolerances for E-UTRAN TDD-TDD inter frequency handover test case when the target cell is unknown.

Table 5.1.6.5-1: Cell specific test parameters for E-UTRAN TDD-TDD inter frequency handover test case when the target cell is unknown

Parameter	Unit	Се	II 1	Ce	ell 2
		T1	T2	T1	T2
E-UTRA RF Channel		•			2
Number					
BW _{channel}	MHz	1	0	,	10
OCNG Patterns		OP.1 TDD	OP.2 TDD	OP.2 TDD	OP.1 TDD
defined in D.2.1(OP.1					
TDD) and in					
D.2.2(OP.2 TDD)					
PBCH_RA	dB				
PBCH_RB	dB				
PSS_RA	dB				
SSS_RA	dB				
PCFICH_RB	dB				
PHICH_RA	dB				
PHICH_RB	dB	()		0
PDCCH_RA	dB				
PDCCH_RB	dB				
PDSCH_RA	dB				
PDSCH_RB	dB				
OCNG_RANote 1	dB				
OCNG_RBNote 1	dB				
N _{oc} Note 3	dBm/15 kHz			-98	
RSRP Note 4	dBm/15 kHz	-94	-94	-Infinity	-93
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	dB	4	4	-Infinity	5
SCH_RP Note 4	dBm/15 kHz	-94	-94	-Infinity	-93
\hat{E}_s/N_{oc}	dB	4	4	-Infinity	5
Propagation Condition	-		Д	WGN	-

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 3: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 4: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The handover delay is defined as the time from the beginning of time period T2, to the moment the UE start to transmit the PRACH to Cell 2.

The handover delay D_{handover} test requirement in this case is expressed as:

Handover delay $D_{handover} = maximum RRC procedure delay + T_{interrupt}$

The maximum RRC procedure delay test requirement in this case is 15ms, as specified in TS 36.331 [5] clause 11.2.

The $T_{\text{interrupt}}$ test requirement in this case is expressed as:

 $T_{interrupt} \equiv T_{search} + T_{IU} + 20$ ms (note: the target cell is unknown)

 $T_{\text{search}} = 80 \text{ ms}$, since Cell 2 is unknown prior to the test

 $T_{IU} = 15$ ms, since 10 ms due to uncertainty in frame and 5 ms additional delay due to PRACH transmission occasion

The handover delay $D_{handover}$ to an unknown target cell shall be less than a total of 130 ms in this test case (note: this gives a total of 15 ms for maximum RRC procedure delay plus 115 ms for $T_{interrupt}$).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

5.2 Handover from E-UTRAN to other RATs

5.2.1 E-UTRAN FDD - UTRAN FDD handover

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined

5.2.1.1 Test purpose

To verify the UE's ability to transfer a connection between the UE and E-UTRAN to UTRAN in RRC_CONNECTED state by meeting the UE RRC procedure delay and interruption time requirements.

5.2.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward that support UTRA FDD.

5.2.1.3 Minimum conformance requirements

The handover delay $D_{handover}$ shall be less than maximum RRC procedure delay + $T_{interrupt}$ in RRC_CONNECTED state.

When the UE receives a RRC message implying handover to UTRAN the UE shall be ready to start the transmission of the new UTRA uplink DPCCH within $D_{handover}$ seconds from the end of the last E-UTRAN TTI containing the RRC MOBILITY FROM E-UTRA command.

Where:

 $D_{handover}$ equals the RRC procedure delay, which is 50 ms plus the interruption time stated in TS 36.133 [4] clause 5.3.1.1.2.

The interruption time is the time between the end of the last TTI containing the RRC command on the E-UTRAN PDSCH and the time the UE starts transmission on the uplink DPCCH in UTRAN FDD, excluding the RRC procedure delay. The interruption time depends on whether the target cell is known to the UE or not. The target cell is known if it has been measured by the UE during the last 5 seconds otherwise it is unknown. The UE shall always perform a UTRA synchronisation procedure as part of the handover procedure.

If the target cell is known the interruption time shall be less than $T_{interrupt1}$. The $T_{interrupt1}$ equation is defined as:

$$T_{interrupt1} = T_{IU} + T_{sync} + 50 + 10*F_{max} \text{ ms}$$

If the target cell is unknown the interruption time shall be less than T_{interrupt2}. The T_{interrupt2} equation is defined as:

$$T_{interrupt2} = T_{IU} + T_{sync} + 150 + 10*F_{max} ms$$

This requirement shall be met, provided that there is one target cell in the MOBILITY FROM E-UTRA command. When UE is connected to an E-UTRA cell, UTRA SFN timing measurements are not reported. This implies that the timing of the DPCH of the UTRA target cells in the active set cannot be configured by UTRAN to guarantee that all target cells fall within the UE reception window of T_0 +/- 148 chips.

Where:

 T_{IU} is the interruption uncertainty when changing the timing from the E-UTRAN to the new UTRAN cell. T_{IU} can be up to one UTRA frame (10 ms).

 F_{max} denotes the maximum number of radio frames within the transmission time intervals of all transport channels that are multiplexed into the same CCTrCH on the UTRA target cell.

 T_{sync} is the time required for measuring the downlink DPCCH channel as stated in TS 25.214 [12] clause 4.3.1.2. In case higher layers indicate the usage of a post-verification period $T_{sync} = 0$ ms. Otherwise $T_{sync} = 40$ ms.

The phase reference is the UTRA primary CPICH.

The requirements assume that N312 has the smallest possible value i.e. only one "in_sync" is required.

The normative reference for this requirement is TS 36.133 [4] clause 5.3.1 and A.5.2.1.

5.2.1.4 Test description

5.2.1.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A, Figure A.22.
- 2. The general test parameter settings are set up according to Table 5.2.1.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are defined in clause 5.2.1.4.3.
- 5. There is one E-UTRA FDD serving cell and one UTRA FDD cell specified in the test. Cell 1 (E-UTRA FDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 5.2.1.4.1-1: General Test Parameters for E-UTRAN FDD - UTRAN FDD handover test case

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference Measurement	As specified in section A.1.1
•		Channel R.0 FDD	
PCFICH/PDCCH/PHICH parameters		DL Reference Measurement	As specified in section A.2.1
-		Channel R.6 FDD	
Initial conditions Active cell		Cell 1	E-UTRAN cell
Neighbouring cell		Cell 2	UTRAN cell
Final condition Active cell		Cell 2	UTRAN cell
Channel Bandwidth (BW _{channel})	MHz	10	
Gap Pattern Id		0	As specified in TS 36.133 [4] Table 8.1.2.1-1 started before T2
			starts
E-UTRAN FDD measurement		RSRP	
quantity			
Inter-RAT (UTRAN FDD)		CPICH Ec/N0	
measurement quantity			
b2-Threshold1	dBm	-91	Absolute E-UTRAN RSRP
			threshold for event B2
b2-Threshold2-UTRA	dB	-18	Absolute UTRAN CPICH Ec/N0
			threshold for event B2
Hysteresis	dB	0	
TimeToTrigger	dB	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	Non-DRX test
Access Barring Information	-	Not sent	No additional delays in random
			access procedure
E-UTRA RF Channel Number		1	One E-UTRA FDD carrier
			frequency is used.
E-UTRA Channel Bandwidth	MHz	10	
(BWchannel)			
UTRA RF Channel Number		1	One UTRA FDD carrier frequency is used.
Monitored UTRA FDD cell list size		12	UTRA cells on UTRA RF channel
			1 provided in the cell before T2.
Post-verification period		False	
T1	S	5	
T2	S	≤5	

5.2.1.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. The RRC message implying handover shall be sent to the UE during T2, after the UE has reported Event B2. T3 is defined as the end of the last E-UTRAN TTI containing the RRC message implying handover.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 2. Set the parameters according to T1 in Table's 5.2.1.5-1 and 5.2.1.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. The SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table's 5.2.1.5-1 and 5.2.1.5-2.
- 6. UE shall transmit a MeasurementReport message triggered by Event B2.
- 7. SS shall transmit a MobilityFromEUTRACommand message implying handover to Cell 2.

- 8. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T2 to T3 as specified in Tables 5.2.1.5-1 and 5.2.1.5-2.
- 9. If the UE transmits the UL DPCCH to Cell 2 less than 190 ms from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure testes is increased by one.
- 10. After T3 expires, the UE shall be switched off. Then ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. .Cell 1 is the active cell.
- 11. The SS shall set Cell 2 primary scrambling code = ((current cell 2 primary scrambling code 50) mod 200 + 100) for next iteration of the test procedure loop.
- 12. Repeat step 2-11 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.2.1.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 and 4.7B with the following exceptions:

Table 5.2.1.4.3-1: Common Exception messages for E-UTRAN FDD - UTRAN FDD handover

Default Message Contents	
Common contents of system information	
blocks exceptions	
Default RRC messages and information	Table H.3.1-1
elements contents exceptions	Table H.3.1-5
·	Table H.3.1-7
	Table H.3.3-1
	Table H.3.3-3

Table 5.2.1.4.3-2: ReportConfigInterRAT-B2-UTRA: Additional E-UTRAN FDD - UTRAN FDD handover

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-8 ReportConfigInterRAT-B2(EUTRA-Thres, UTRA-Thres)				
Information Element	Value/remark	Comment	Condition	
ReportConfigInterRAT-B2-UTRA(EUTRA-Thres,				
UTRA-Thres) ::= SEQUENCE {				
triggerType CHOICE {				
event SEQUENCE {				
eventId CHOICE {				
eventB2 SEQUENCE {				
b2-Threshold1 CHOICE {				
threshold-RSRP	49(-91 dBm)	-91 dBm EUTRA- Thres is actual threshold value in dBm (49 - 140 dBm)		
}				
b2-Threshold2 CHOICE {				
b2-Threshold2-UTRA CHOICE {				
thresholdUTRA-EcN0	13 (-18 dB)	-18 dB is actual UTRA-Thres is actual Ec/NOEcNO value in dB ((13 - 49)/2 dB)		
}				
}				
}				
}				
timeToTrigger	ms0			
}				
}				
maxReportCells	6			
reportInterval	ms1024			
reportAmount	Infinity			
}				

Table 5.2.1.4.3-3: MeasResults: Additional E-UTRAN FDD - UTRAN FDD handover

Derivation Path: 36.331 clause 6.3.5	V.1. /	0	0 1111
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultsServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultsNeighCells CHOICE {			
measResultListUTRA	MeasResultListUTRA		
}			

Table 5.2.1.4.3-4: MeasResultListUTRA: Additional E-UTRAN FDD - UTRAN FDD handover

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId CHOICE {			
fdd	PhysCellIdUTRA-FDD		
}			
cgi-Info SEQUENCE {			
cellGloballd	CellGloballdUTRA		
IcoatonAreaCode	Not present		
routingAreaCode	Not present		
plmn-IdentityList	Not present		
}			
measResult SEQUENCE {			
utra-RSCP		Set according to	
		specific test	
utra-EcN0		Set according to	
		specific test	
}			
}			

Table 5.2.1.4.3-5: PhysCellIdentityUTRA-FDD: Additional E-UTRAN FDD - UTRAN FDD handover

Derivation Path: 36.331 clause 6.3.4			
Information Element	Value/remark	Comment	Condition
PhysCellIdUTRA-FDD ::= SEQUENCE {	250	This is the typical	
		value range used in	
		UTRAN FDD tests.	

Table 5.2.1.4.3-6: HANDOVER TO UTRAN COMMAND

Information Element	Value/remark
Downlink information common for all radio links	
 Downlink DPCH info common for all RL 	
- Timing indicator	Initialize
- Default DPCH Offset Value	Arbitrary set to value 0306688 by step of 512

5.2.1.5 Test requirement

Tables 5.2.1.4.1-1, 5.2.1.5-1 and 5.2.1.5-2 define the primary level settings including test tolerances for E-UTRAN FDD - UTRAN FDD handover test.

Table 5.2.1.5-1: Cell Specific Test requirement Parameters for E-UTRAN FDD to UTRAN FDD handover test case (Cell 1)

Parameter	Unit	Cell 1 (E-UTRA)				
		T1 T2 T3		T3		
E-UTRA RF Channel			1			
number						
BW _{channel}	MHz		10			
OCNG Patterns defined		OP.1 FDD	OP.1 FDD	OP.2 FDD		
in D.1.1 (OP.1 FDD) and						
in D.1.2 (OP.2 FDD)						
PBCH_RA	dB					
PBCH_RB	dB					
PSS_RA	dB					
SSS_RA	dB					
PCFICH_RB	dB					
PHICH_RA	dB					
PHICH_RB	dB		0			
PDCCH_RA	dB					
PDCCH_RB	dB					
PDSCH_RA	dB					
PDSCH_RB	dB					
OCNG_RA ^{Note}	dB					
OCNG_RB ^{Note}	dB					
\hat{E}_s/I_{ot}	dB	0 + TT	0 + TT	0 + TT		
\hat{E}_s/N_{oc}		0 + TT	0 + TT	0 + TT		
N_{oc}	dBm/15 kHz	-98				
RSRP	dBm/15 KHz	-98 + TT -98 + TT -98 + T		-98 + TT		
Propagation Condition		AWGN				
Note 1: OCNG shall be used such that both cells are fully allocated and a						

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Table 5.2.1.5-2: Cell Specific Test requirement Parameters for Cell 2 UTRAN FDD cell

Parameter	Unit	Cell 2 (UTRA)		
		T1	T2	T3
CPICH_Ec/lor	dB		-10	
PCCPCH_Ec/lor	dB		-12	
SCH_Ec/lor	dB		-12	
PICH_Ec/lor	dB		-15	
DCH_Ec/lor	dB	N/A	N/A	Note 1
OCNS_Ec/lor	dB	-0.941	-0.941	Note 2
\hat{I}_{or}/I_{oc}	dB	-infinity	-1.8 + TT	-1.8 + TT
I_{oc}	dBm/3,84 MHz	-70	-70	-70
CPICH_Ec/lo	dB	-infinity	-14 + TT	-14 + TT
Propagation Condition			AWGN	

Note 1: The DPCH level is controlled by the power control loop

Note 2: The power of the OCNS channel that is added shall make the total power from the cell to be equal to I_{or}.

The handover delay is defined as the time from the beginning of time period T3, to the moment the UE start to transmit the UL DPCCH to Cell 2.

The handover delay D_{handover} test requirement in this case is expressed as:

 $Handover\ delay\ D_{handover} = maximum\ RRC\ procedure\ delay\ +\ T_{interrupt1}\ (note:\ the\ target\ cell\ is\ known)$

 $T_{interrupt1} = T_{IU} + T_{sync} + 50 + 10*F_{max} ms$

 $T_{IU} = 10 \text{ ms}$; T_{IU} can be up to one UTRA frame (10 ms).

 F_{max} = 4 radio frames; The maximum radio frames within the transmission time intervals to fit into DCCH with 40 ms TTI

 $T_{sync} = 40 \text{ ms}$; In case higher layers indicate the usage of a post-verification period $T_{sync} = 0 \text{ ms}$. Otherwise $T_{sync} = 40 \text{ ms}$

Maximum RRC procedure delay = 50 ms as defined in TS 36.331 [5] clause 11.2

The handover delay $D_{handover}$ shall be less than a total of 190 ms in this test case (note: this gives a total of 50 ms for maximum RRC procedure delay plus 140 ms for $T_{interrupt1}$).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

5.2.2 E-UTRAN TDD - UTRAN FDD handover

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined

5.2.2.1 Test purpose

To verify the UE's ability to transfer a connection between the UE and E-UTRAN to UTRAN in RRC_CONNECTED state by meeting the UE RRC procedure delay and interruption time requirements.

5.2.2.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward that support UTRA FDD.

5.2.2.3 Minimum conformance requirements

The handover delay $D_{handover}$ shall be less than maximum RRC procedure delay + $T_{interrupt}$ in RRC_CONNECTED state.

When the UE receives a RRC message implying handover to UTRAN the UE shall be ready to start the transmission of the new UTRA uplink DPCCH within $D_{handover}$ seconds from the end of the last E-UTRAN TTI containing the RRC MOBILITY FROM E-UTRA command.

Where:

 $D_{handover}$ equals the RRC procedure delay, which is 50ms plus the interruption time stated in TS 36.133 [4] clause 5.3.1.1.2.

The interruption time is the time between the end of the last TTI containing the RRC command on the E-UTRAN PDSCH and the time the UE starts transmission on the uplink DPCCH in UTRAN FDD, excluding the RRC procedure delay. The interruption time depends on whether the target cell is known to the UE or not. The target cell is known if it has been measured by the UE during the last 5 seconds otherwise it is unknown. The UE shall always perform a UTRA synchronisation procedure as part of the handover procedure.

If the target cell is known the interruption time shall be less than $T_{interrupt1}$. The $T_{interrupt1}$ equation is defined as:

$$T_{interrupt1} = T_{IU} + T_{sync} + 50 + 10*F_{max} \text{ ms}$$

If the target cell is unknown the interruption time shall be less than $T_{interrupt2}$. The $T_{interrupt2}$ equation is defined as:

$$T_{interrupt2} = T_{IU} + T_{sync} + 150 + 10*F_{max} ms$$

This requirement shall be met, provided that there is one target cell in the MOBILITY FROM E-UTRA command. When UE is connected to an E-UTRA cell, UTRA SFN timing measurements are not reported. This implies that the timing of the DPCH of the UTRA target cells in the active set cannot be configured by UTRAN to guarantee that all target cells fall within the UE reception window of T_0 +/- 148 chips.

Where:

 T_{IU} is the interruption uncertainty when changing the timing from the E-UTRAN to the new UTRAN cell. T_{IU} can be up to one UTRA frame (10 ms).

 F_{max} denotes the maximum number of radio frames within the transmission time intervals of all transport channels that are multiplexed into the same CCTrCH on the UTRA target cell.

 T_{sync} is the time required for measuring the downlink DPCCH channel as stated in TS 25.214 [12] clause 4.3.1.2. In case higher layers indicate the usage of a post-verification period $T_{\text{sync}} = 0$ ms. Otherwise $T_{\text{sync}} = 40$ ms.

The phase reference is the UTRA primary CPICH.

The requirements assume that N312 has the smallest possible value i.e. only one "in_sync" is required.

The normative reference for this requirement is TS 36.133 [4] clause 5.3.1 and A.5.2.2.

5.2.2.4 Test description

5.2.2.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A, Figure A.14.
- 2. The general test parameter settings are set up according to Table 5.2.2.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are defined in clause 5.2.2.4.3.
- 5. There is one E-UTRA TDD serving cell and one UTRA FDD cell specified in the test. Cell 1 (E-UTRA TDD cell) is the cell used for call setup with the power level set according to Annex C.0 and C.1 for this test.

Table 5.2.2.4.1-1: General test parameters for E-UTRAN TDD-UTRAN FDD handover

Para	meter	Unit	Value	Comment
PDSCH paramete	,		DL Reference Measurement Channel R.0 TDD	As specified in section A.1.2
PCFICH/PDCCH/ parameters (E-U1			DL Reference Measurement Channel R.6 TDD	As specified in section A.2.2
	tive cell		Cell 1	Cell 1 is on E-UTRA RF channel number 1.
Ne	ighbour cell		Cell 2	Cell 2 is on UTRA RF channel number 1.
Final Ac conditions	tive cell		Cell 2	
Special subframe	configuration		6	As specified in table 4.2-1 in 3GPP TS 36.211. Applicable to cell 1.
Uplink-downlink o	configuration		1	As specified in table 4.2-2 in 3GPP TS 36.211. Applicable to cell 1
E-UTRAN TDD m			RSRP	
Inter-RAT (UTRA measurement qua			CPICH Ec/lo	
b2-Threshold1		dBm	-91	Absolute E-UTRAN RSRP threshold for event B2
b2-Threshold2-U	TRA	dB	-18	UTRAN FDD CPICH Ec/lo threshold for event B2
Hysteresis		dB	0	
DRX			OFF	No DRX configured.
Time to Trigger		Ms	0	
Filter coefficient			0	
CP length			Normal	Applicable to cell 1
Gap pattern confi			0	As specified in Table 8.1.2.1-1; to start before T2 starts
E-UTRA RF Char	nnel Number		1	One E-UTRA TDD carrier frequency is used.
E-UTRA Channel (BW _{channel})		MHz	10	
UTRA RF Channe	el Number		1	One UTRA FDD carrier frequency is used.
Monitored UTRA	FDD cell list size		12	UTRA cells on UTRA RF channel 1 provided in the cell list before T2.
Post-verification p	period		False	Post verification is not used.
T1		S	5	
T2		S	≤ 5	
T3		S	1	

5.2.2.4.2 Test procedure

The test consists of one E-UTRAN TDD cell and one neighbour UTRAN FDD cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. A neighbouring cell list, including the UTRA cell (Cell 2) is sent to the UE before T2 starts. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. The RRC message implying handover shall be sent to the UE during T2, after the UE has reported Event B2. T3 is defined as the end of the last E-UTRAN TTI containing the RRC message implying handover.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 2. Set the parameters according to T1 in Table 5.2.2.5-1 and 5.2.2.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.

- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table's 5.2.2.5-1 and 5.2.2.5-2.
- 6. UE shall transmit a MeasurementReport message triggered by Event B2.
- 7. SS shall transmit a MobilityFromEUTRACommand message implying handover to Cell 2.
- 8. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T2 to T3 as specified in Table 5.2.2.5-1 and 5.2.2.5-2.
- 9. If the UE transmits the Uplink DPCCH channel to Cell 2 less than [190 ms] from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure testes is increased by one.
- 10. After T3 expires, the UE shall be switched off. Then ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 11. The SS shall set Cell 2 primary scrambling code = ((current cell 2 primary scrambling code 50) mod 200 + 100) for next iteration of the test procedure loop.
- 12. Repeat step 2-11 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.2.2.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 5.2.2.4.3-1: Common Exception messages for E-UTRAN TDD - UTRAN FDD handover

Default Message Contents				
Common contents of system information				
blocks exceptions				
Default RRC messages and information	Table H.3.1-1			
elements contents exceptions	Table H.3.1-5			
·	Table H.3.1-7			
	Table H.3.3-1			
	Table H.3.3-3			

Table 5.2.2.4.3-2: ReportConfigInterRAT-B2-UTRA: Additional E-UTRAN TDD - UTRAN FDD handover

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.0	6-8 ReportConfigInterRAT-I	B2(EUTRA-Thres, UTR	A-Thres)-
Information Element	Value/remark	Comment	Condition
ReportConfigInterRAT-B2-UTRA(EUTRA-Thres,			
UTRA-Thres) ::= SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventB2 SEQUENCE {			
b2-Threshold1 CHOICE {			
Threshold-RSRP	49 (-91dBm)	-91 dBm EUTRA- Thres is actual threshold value in dBm (49 - 140 dBm)	
}			
b2-Threshold2 CHOICE {			
b2-Threshold2-UTRA CHOICE {			
thresholdUTRA-EcN0	13 (-18dB)	-18 dB is actual UTRA-Thres is actual Ec/NOo value in dB ((13 - 49)/2 dB)	
}			
}			
}			
}			
timeToTrigger	ms0		
}			
}			
maxReportCells	6		
reportInterval	ms1024		
reportAmount	infinity		
}			

Table 5.2.2.4.3-3: MeasResults: Additional E-UTRAN TDD - UTRAN FDD handover

Value/remark	Comment	Condition
1		
	Set according to specific test	
	Set according to specific test	
MeasResultListUTRA		
	1	Set according to specific test Set according to specific test Set according to specific test

Table 5.2.2.4.3-4: MeasResultListUTRA: Additional E-UTRAN TDD - UTRAN FDD handover

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId CHOICE {			
fdd	PhysCellIdUTRA-FDD		
}			
cgi-Info SEQUENCE {			
cellGloballd	CellGloballdUTRA		
IcoatonAreaCode	Not present		
routingAreaCode	Not present		
plmn-IdentityList	Not present		
}			
measResult SEQUENCE {			
utra-RSCP		Set according to	
		specific test	
utra-EcN0		Set according to	
		specific test	
}			
}			

Table 5.2.2.4.3-5: PhysCellIdentityUTRA-FDD: Additional E-UTRAN TDD - UTRAN FDD handover

Derivation Path: 36.331 clause 6.3.4			
Information Element	Value/remark	Comment	Condition
PhysCellIdUTRA-FDD ::= SEQUENCE {	250	This is the typical	
		value range used in	
		UTRAN FDD tests.	

5.2.2.5 Test requirement

Tables 5.2.2.4.1-1, 5.2.2.5-1 and 5.2.2.5-2 define the primary level settings including test tolerances for E-UTRAN TDD - UTRAN FDD handover test.

Table 5.2.2.5-1: Cell specific test parameters for E-UTRAN TDD (cell 1) for handover to UTRAN FDD (cell # 2)

Parameter	Unit	Cell 1 (E-UTRAN)			
		T1	T2	T3	
E-UTRA RF Channel			1		
Number					
BW _{channel}	MHz		10	_	
OCNG Pattern defined in					
D.2.1 (OP.1 TDD) and in		OP.1	TDD	OP.2 TDD	
D.2.2 (OP.1 TDD)					
PBCH_RA					
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB	dB		0		
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA ^{Note}					
OCNG_RB ^{Note}					

RSRP	dBm/15 kHz	-98+TT	-98+TT	-98+TT		
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{oc}}$	dB	0+TT	0+TT	0+TT		
\hat{E}_s/N_{oc}	dB	0+TT	0+TT	0+TT		
N_{oc}	dBm/15 kHz	-98				
Propagation Condition		AWGN				
No. 1 CONTO 1 HILL IN THE CHIEF HE CHIEF THE CONTO IN THE CHIEF TH						

Note: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Table 5.2.2.5-2: Cell specific test parameters for UTRAN FDD (cell # 2) for handover from E-UTRAN TDD cell (cell #1)

Parameter	Unit	Cell 2 (UTRA)		
		T1	T2	T3
CPICH_Ec/lor	dB		-10	
PCCPCH_Ec/lor	dB		-12	
SCH_Ec/lor	dB		-12	
PICH_Ec/lor	dB	-15		
DPCH_Ec/lor	dB	N/A	N/A	Note 1
OCNS	dB	-0.941	-0.941	Note 2
\hat{I}_{or}/I_{oc}	dB	-infinity	-1.8+TT	- 4 0 . TT
011 00				1.8+TT
I_{oc}	dBm/3.84 MHz		-70	
CPICH_Ec/lo	dB	-infinity	-14+TT	-14+TT
Propagation Condition			AWGN	

Note 1: The DPCH level is controlled by the power control loop

Note 2: The power of the OCNS channel that is added shall make
the total power from the cell to be equal to I_{or}.

The handover delay is defined as the time from the beginning of time period T3, to the moment the UE start to transmit the UL DPCCH to Cell 2.

The handover delay D_{handover} test requirement in this case is expressed as:

Handover delay D_{handover} = maximum RRC procedure delay + T_{interrup1t}(note: the target cell is known)

 $T_{interrupt1} = T_{IU} + T_{sync} + 50 + 10*F_{max} ms$

 $T_{IIJ} = 10 \text{ ms}$; T_{IIJ} can be up to one UTRA frame (10 ms).

 F_{max} = 4 radio frames; The maximum radio frames within the transmission time intervals to fit into DCCH with 40 ms TTI

 $T_{\text{sync}} = 40 \text{ ms}$; In case higher layers indicate the usage of a post-verification period $T_{\text{sync}} = 0 \text{ ms}$. Otherwise $T_{\text{sync}} = 40 \text{ ms}$

Maximum RRC procedure delay = 50 ms as defined in TS 36.331 [5] clause 11.2

The handover delay $D_{handover}$ shall be less than a total of 190 ms in this test case (note: this gives a total of 50ms for maximum RRC procedure delay plus 140 ms for Tinterrupt).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

5.2.3 E-UTRAN FDD - GSM handover

5.2.3.1 Test purpose

To verify the UE's ability to transfer a connection between the UE and E-UTRAN to GSM in RRC_CONNECTED state by meeting the UE handover delay and interruption time requirements.

5.2.3.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward that support GSM.

5.2.3.3 Minimum conformance requirements

The handover delay $T_{Handover\ delay}$ shall be less than handover delay + T_{offset} + T_{UL} in RRC_CONNECTED state.

The handover delay given in table 5.2.3.3-1 and interruption time given in table 5.2.3.3-2 requirements for the case where the UE has not synchronised to the GSM cell before receiving the RRC MOBILITY FROM E-UTRA command are valid when the signal quality of the GSM cell is sufficient for successful synchronisation with one attempt. If the UE is unable to synchronise to the GSM cell on the first attempt, it shall continue to search for synchronisation information for up to 800 ms duration. If after 800 ms the UE has not synchronised to the GSM cell it shall follow the handover failure procedure specified in TS 36.331 [5].

When the UE receives a RRC MOBILITY FROM E-UTRA command the UE shall be ready to transmit (as specified in 3GPP TS 45.010 [13]) on the channel of the new RAT within the value defined in TS 36.133 [4] clause 5.3.3.2.1 and shown in table 5.2.3.3-1 from the end of the last TTI containing the RRC command.

The UE shall process the RRC procedures for the MOBILITY FROM E-UTRA command within 50 ms, which is noted as RRC procedure delay.

Table 5.2.3.3-1: E-UTRAN/GSM handover - handover delay

UE synchronisation status	handover delay [ms]
The UE has synchronised to the GSM cell before the	90
RRC MOBILITY FROM E-UTRA COMMAND is received	
The UE has not synchronised to the GSM cell before	190
RRC the MOBILITY FROM E-UTRA COMMAND is	
received	

The interruption time is the time between the end of the TTI containing the RRC command on the E-UTRAN PDSCH and the time the UE starts transmission on the uplink channel in GSM, excluding the RRC procedure delay. The interruption time depends on whether the UE has synchronized to the target GSM cell or not and shall be less than the value defined in TS 36.133 [4] clause 5.3.3.2.1 and shown in table 5.2.3.3-2.

Table 5.2.3.3-2: E-UTRAN/GSM handover - interruption time

Synchronisation status	Interruption time [ms]
The UE has synchronised to the GSM cell before the	40
RRC MOBILITY FROM E-UTRA COMMAND is received	
The UE has not synchronised to the GSM cell before the	140
RRC MOBILITY FROM E-UTRA COMMAND is received	

The normative reference for this requirement is TS 36.133 [4] clause 5.3.3 and A.5.2.3.

5.2.3.4 Test description

5.2.3.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A, Figure A.14.
- 2. The general test parameter settings are set up according to Table 5.2.3.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 5.2.3.4.3.
- 5. There is one E-UTRA FDD serving cell and one GSM cell specified in the test. Cell 1 (E-UTRA FDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 5.2.3.4.1-1: General Test Parameters for E-UTRAN FDD - GSM handover test case

Para	Parameter		Value	Comment
PDSCH parameters			DL Reference Measurement Channel R.0 FDD	As specified in section A.1.1
PCFICH/PDCCH/PHICH parameters			DL Reference Measurement Channel R.6 FDD	As specified in section A.2.1
Gap Pattern Id			1	As specified in TS 36.133 [4] section 8.1.2.1.
Initial conditions	Active cell		Cell 1	
	Neighbour cell		Cell 2	
Final conditions	Active cell		Cell 2	
Inter-RAT measu	rement quantity		GSM Carrier RSSI	
Threshold other s	system	dBm	-80	Absolute GSM carrier RSSI threshold for event B1.
Hysteresis		dB	0	
Time to Trigger		ms	0	
Filter coefficient			0	L3 filtering is not used
DRX				OFF
T1		S	20	
T2	S		7	
T3		S	1	

5.2.3.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of Cell 2. The RRC message implying handover to Cell 2 shall be sent to the UE during T2, after the UE has reported Event B1. T3 is defined as the end of the last E-UTRAN TTI containing the RRC message implying handover. The requirements are also applicable for a UE not requiring measurement gap, in which case no measurement gap pattern is sent.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell
- 2. Set the parameters according to T1 in Table's 5.2.3.5-1 and 5.2.3.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table's 5.2.3.5-1 and 5.2.3.5-2. T2 starts.
- 6. UE shall transmit a MeasurementReport message triggered by Event B1.
- 7. SS shall transmit a MobilityFromEUTRACommand message implying handover to Cell 2.
- 8. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T2 to T3 as specified in Table 5.2.3.5-2. T3 starts.
- 9. If the UE sends access bursts on the new DCCH to Cell 2 less than 100 ms from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure testes is increased by one.
- 10. After T3 expires, the UE shall be switched off. Then ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 11. The SS shall set a different BSIC on Cell 2, as the previous timing information of Cell 2 is invalid in the UE for the next iteration of the test procedure loop.
- 12. Repeat step 2-11 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.2.3.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 5.2.3.4.3-1: Common Exception messages for E-UTRAN FDD - GSM handover

Default Message Contents	
Common contents of system information	
blocks exceptions	
Default RRC messages and information	Table H.3.1-1
elements contents exceptions	Table H.3.1-7
	Table H.3.3-2
	Table H.3.3-3

Table 5.2.3.4.3-2: SystemInformationBlockType7: Additional E-UTRAN FDD - GSM handover

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-3 SystemInformationBlockType7				
Information Element	Value/remark	Comment	Condition	
commonInfo SEQUENCE {				
p-MaxGERAN	33 (33 dBm)		GSM 400 &	
			GSM 900 &	
			GSM 850 &	
			GSM 700	
	30 (30 dBm)		DCS 1800	
			& PCS 1900	
}				

Table 5.2.3.4.3-3: MeasConfig-DEFAULT: Additional E-UTRAN FDD - GSM handover

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-1 MeasConfig-DEFAULT				
Information Element	Value/remark	Comment	Condition	
MeasConfig-DEFAULT ::= SEQUENCE {				
measObjectToRemoveList	Not present			
·				
measObjectToAddModList SEQUENCE (SIZE	2 entry			
(1maxObjectId)) OF SEQUENCE {	-			
MeasObjectToAddMod SEQUENCE {				
measObjectId	IdMeasObject-f1			
measObject CHOICE {				
MeasObjectEUTRA	MeasObjectEUTRA-	E-UTRA Cell		
	GENERIC(f1)			
}				
}				
MeasObjectToAddMod SEQUENCE {				
measObjectId	IdMeasObject-f13			
measObject CHOICE {				
MeasObjectGERAN	MeasObjectGERAN-	GERAN Cell		
	GENERIC(f13)			
}				
}				
}				
reportConfigToRemoveList	Not present			
reportConfigToAddModList SEQUENCE (SIZE	1 entry			
(1maxReportConfigId))OF SEQUENCE {				
reportConfigId	idReportConfig-B1			
reportConfig	ReportConfigInterRAT-B1-			
	GERAN			
}				
measIdToRemoveList	Not present			
measIdToAddModList SEQUENCE (SIZE	1 entry			
(1maxMeasId)) of SEQUENCE {				
measld	1			
measObjectId	IdMeasObject-f13			
reportConfigId	idReportConfig-B1			
}				
quantityConfig	QuantityConfig-DEFAULT			
measGapConfig	MeasGapConfig-GP2			
s-Measure	Not present			
preRegistrationInfoHRPD	Not present			
speedStatePars	Not present			
}				

Table 5.2.3.4.3-4: ReportConfigInterRAT-B1-GERAN: Additional E-UTRAN FDD - GSM handover

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-7A ReportConfigInterRAT-B1-GERAN(GERAN-Thres)			
Information Element	Value/remark	Comment	Condition
ReportConfigInterRAT-B1-GERAN(GERAN-Thres)			
::= SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventide CHOICE {			
eventB1 SEQUENCE {			
b1-Threshold CHOICE {			
B1-Threshold-GERAN CHOICE {			
thresholdGERAN	30 (-80 dBm)	-80 is actual value	
		in dBm (30 - 110	
		dBm)	

Table 5.2.3.4.3-5: MeasResults: Additional E-UTRAN FDD - GSM handover

Information Element	Value/remark	Comment	Condition
MeasResults::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListGERAN }	MeasResultListGERAN		

Table 5.2.3.4.3-6: MeasResultListGERAN: Additional E-UTRAN FDD - GSM handover

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListGERAN ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
MeasResultGERAN SEQUENCE {			
carrierFreq	CarrierFreqGERAN	Contains the carrier frequency of the target GERAN cell	
physCellId	PhysCellIdGERAN	Contains the Base Station Identity Code (BSIC)	
}			
Cgi-Info SEQUENCE {			
cellGloballd	CellGlobalIdGERAN		
routingAreaCode	Not present		
}			
measResult SEQUENCE {			
Rssi		Set according to specific test	
}			
}			

5.2.3.5 Test requirement

Tables 5.2.3.4.1-1, 5.2.3.5-1 and 5.2.3.5-2 defines the primary level settings including test tolerances for E-UTRAN FDD to GSM handover test case.

Table 5.2.3.5-1: Cell Specific Test requirement Parameters for Cell 1 E-UTRAN FDD cell

Parameter	Unit	Cell 1			
		T1, T2 T3			
BW _{channel}	MHz	1	0		
OCNG Patterns					
defined in D.1.1		OD 4 EDD	OD 2 EDD		
(OP.1 FDD) and in		OP.1 FDD OP.2 FDD			
D.1.2 (OP.2 FDD)					
PBCH_RA	dB				
PBCH_RB	dB				
PSS_RA	dB				
SSS_RA	dB				
PCFICH_RB	dB				
PHICH_RA	dB				
PHICH_RB	dB		0		
PDCCH_RA	dB				
PDCCH_RB	dB	7			
PDSCH_RA	dB				
PDSCH_RB	dB				
OCNG_RA Note1	dB				
OCNG_RB Note1	dB				
$\hat{ ext{E}}_{ ext{s}}/ ext{I}_{ ext{ot}}$	dB	4	4		
$N_{oc}^{\text{Note 2}}$	dBm/15	-08 (\)	WGN)		
	kHz	-90 (A	W GIV)		
\hat{E}_s/N_{oc}	dB	4	4		
RSRP Note 3	dBm/15kH	-6	94		
	Z				
Propagation Condition		AW	'GN		
	hall be used as	luch that call 1 is fully allocate.	d and a constant total		
Note 1: OCNG shall be used such that cell 1 is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
	ence from other cells and noise sources not specified in the test is				
	assumed to be constant over subcarriers and time and shall be modelled as				
AWGN of appropriate power for $rac{N_{oc}}{}$ to be fulfilled.					
Note 3: RSRP le					
purposes. They are not settable parameters themselves.					

Table 5.2.3.5-2: Cell Specific Test requirement Parameters for Cell 2 GSM cell

Parameter	Unit	Cell 2 (GSM) T1 T2, T3	
Farameter	Oiiit		
Absolute RF Channel Number		ARFCN 1	
RXLEV	dBm	-85	-75

The handover delay is defined as the time from the beginning of time period T3, to the moment the UE start to send access bursts on the new DCCH to Cell 2.

The handover delay $T_{\mbox{\scriptsize Handover delay}}$ test requirement in this case is expressed as:

Handover delay $T_{\text{Handover delay}} = \text{handover delay} + T_{\text{Offset}} + T_{\text{UL}}$

Handover delay = 90 ms; this is based on handover delay value as defined in Table 5.2.3.3.-1

 $T_{offset} = 4.65$ ms; GSM timing uncertainty between the time from when the UE is ready to transmit until the start of the next timeslot in GSM 26 multiframe structure

T_{III.} = 4.65 ms; the time the UE has to wait in case the next timeslot is an idle frame or a SACCH frame

The handover delay $T_{Handover delay}$ shall be less than a total of 100 ms in this test case (note: this gives a total of 99.29 ms but the test allows 100 ms).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

5.2.4 E-UTRAN TDD - UTRAN TDD handover

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- •
- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined

5.2.4.1 Test purpose

To verify the UE's ability to transfer a connection between the UE and E-UTRAN to UTRAN in RRC_CONNECTED state by meeting the UE RRC procedure delay and interruption time requirements.

5.2.4.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward that support UTRA TDD.

5.2.4.3 Minimum conformance requirements

The handover delay $D_{handover}$ shall be less than maximum RRC procedure delay + $T_{interrupt}$ in RRC_CONNECTED state.

When the UE receives a RRC message implying E-UTRAN/UTRAN TDD handover the UE shall be ready to start the transmission of the new uplink DPCH or the SYNC-UL within $D_{handover}$ seconds from the end of the last TTI containing the RRC MOBILITY FROM E-UTRA command.

Where:

 $D_{handover}$ equals the RRC procedure performance value plus the interruption time stated in TS 36.133 [4] section 5.3.2.2.

The interruption time, i.e. the time between the end of the last TTI containing a transport block on the E-UTRAN PDCCH and the time the UE starts transmission of the new uplink DPCH or the SYNC-UL, is dependent on whether the target cell is known for the UE or not. The UE shall always perform a UTRA synchronisation procedure as part of the handover procedure.

If the target cell has been measured by the UE during the last 5 seconds, the interruption time shall be less than $T_{interrupt1}$

$$T_{interrupt1} = T_{offset} + T_{UL} + 30*F_{SFN} + 20 + 10*F_{max} \text{ ms}$$

If the target cell has not been measured by the UE during the last 5 seconds, the interruption time shall be less than $T_{interrupt2}$

$$T_{interrupt2} = T_{offset} + T_{UL} + 30*F_{SFN} + 180 + 10*F_{max} ms$$

Where:

 T_{offset} Equal to 10 ms, the frame timing uncertainty between the old cell and the target cell and the time that can elapse until the appearance of a Beacon channel

 T_{UL} Equal to 10 ms, the time that can elapse until the appearance of the UL timeslot in the target cell

F_{SFN} Equal to 1 if SFN decoding is required and equal to 0 otherwise

 F_{max} denotes the maximum number of radio frames within the transmission time intervals of all transport channels that are multiplexed into the same CCTrCH.

The interruption time requirements for an unknown target cell shall apply only if the signal quality of the unknown target cell is sufficient for successful synchronisation with one attempt.

The normative reference for this requirement is TS 36.133 [4] clause 5.3.2 and A.5.2.4.

5.2.4.4 Test description

5.2.4.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A, Figure A.22.
- 2. The general test parameter settings are set up according to Table 5.2.4.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are defined in clause 5.2.4.4.3.
- 5. There is one E-UTRA TDD serving cell and one UTRA TDD cell specified in the test. Cell 1 (E-UTRA TDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 5.2.4.4.1-1: General test parameters for E-UTRA TDD to UTRA (1.28 Mcps TDD OPTION) handover test case

Paran	Parameter Unit Value		Comment			
PDSCH paramete	ers		DL Refer Channel R.			As specified in section A.3.1.1.2
PCFICH/PDCCH/ parameters	PHICH		DL Refer Channel R.	ence 6 TDD	Measurement	As specified in section A.3.1.2.2
Initial conditions	Active cell			Cell	1	E-UTRA TDD cell
	Neighbour cell			Cell	2	UTRA 1.28Mcps TDD Cell
Final conditions	Active cell			Cell	2	
Gap Pattern Id				0		As specified in 3GPP TS 36.133 section 8.1.2.1.
Uplink-downlink configuration of cell 1				1		As specified in table 4.2.2 in TS 36.211
Special subframe of cell 1	configuration	tion 6			As specified in table 4.2.1 in TS 36.211	
CP length of cell	CP length of cell 1		Normal		al	
Time offset between cells					S	Asynchronous cells 3ms or 92160*Ts
Access Barring Information			Not Sent		ent	No additional delays in random access procedure.
Hysteresis		dB		0		
Time To Trigger		dB		0		
Filter coefficient				0		L3 filtering is not used
DRX			OFF		=	
Ofn		dB		0		
Hys		dB	0			
Thresh1		dBm	-94			E-UTRA event B2 threshold
Thresh2		dBm	-79			UTRA event B2 threshold
T1	•	S		5		
T2		S	≤10			
T3		S		1		

5.2.4.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of Cell 2. A neighbouring cell list, including the UTRA cell (Cell 2) is sent to the UE before T2 starts. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. T3 is defined as the end of the last TTI containing the RRC message implying handover.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 2. Set the parameters according to T1 in Table's 5.2.4.5-1 and 5.2.4.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table's 5.2.4.5-1 and 5.2.4.5-2. T2 starts.
- 4. UE shall transmit a MeasurementReport message triggered by Event B2.
- 5. SS shall transmit a MobilityFromEUTRACommand message implying handover to Cell 2.
- 6. The start of T3 is the instant when the last TTI containing the RRC MobilityFromEUTRACommand message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T2 to T3 as specified in Tables 5.2.4.5-1 and 5.2.4.5-2. T3 starts.
- 7. If the UE transmits the UL to Cell 2 less than 90 ms from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure testes is increased by one.
- 8. After T3 expires, the UE shall be switched off. Then ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.

- 9. The SS shall set Cell 2 primary scrambling code = ((current cell 2 primary scrambling code 50) mod 200 + 100) for next iteration of the test procedure loop.
- 10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.2.4.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 5.2.4.4.3-1: Common Exception messages for E-UTRA TDD to UTRA TDD cell handover

Default Message Contents	
Common contents of system information	
blocks exceptions	
Default RRC messages and information	Table H.3.1-1
elements contents exceptions	Table H.3.1-5
	Table H.3.1-7
	Table H.3.3-1
	Table H.3.3-3

Table 5.2.4.4.3-2: ReportConfigInterRAT-B2-UTRA: Additional E-UTRAN TDD - UTRAN TDD handover

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-8 ReportConfigInterRAT-B2(EUTRA-Thres, UTRA-Thres)						
Information Element	Value/remark	Comment	Condition			
ReportConfigInterRAT-B2-UTRA(EUTRA-Thres,						
UTRA-Thres) ::= SEQUENCE {						
triggerType CHOICE {						
event SEQUENCE {						
eventId CHOICE {						
eventB2 SEQUENCE {						
b2-Threshold1 CHOICE {						
threshold-RSRP	46 (-94 dBm)	-94 dBm EUTRA- Thres is actual threshold value in dBm (46 - 140 dBm)				
}						
b2-Threshold2 CHOICE {						
b2-Threshold2-UTRA CHOICE {						
thresholdUTRA-RSCP	36 (-79 dB)	-79 dB is actual UTRA-Thres is actual RSCP value in dB (36 - 115 dBm)				
}						
}						
}						
}						
timeToTrigger	ms0					
}						
}						
maxReportCells	6					
reportInterval	ms1024					
reportAmount	Infinity					
}						

Table 5.2.4.4.3-3: MeasResults: Additional E-UTRAN TDD - UTRAN TDD handover

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultsServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultsNeighCells CHOICE {			
measResultListUTRA	MeasResultListUTRA		
}			
}			

Table 5.2.4.4.3-4: MeasResultListUTRA: Additional E-UTRAN TDD - UTRAN TDD handover

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId CHOICE {			
tdd	PhysCellIdUTRA-TDD		
}			
cgi-Info SEQUENCE {			
cellGloballd	CellGloballdUTRA		
IcoatonAreaCode	Not present		
routingAreaCode	Not present		
plmn-IdentityList	Not present		
}			
measResult SEQUENCE {			
utra-RSCP		Set according to	
		specific test	
utra-EcN0		Set according to	
		specific test	
}			
}			

Table 5.2.4.4.3-5: PhysCellIdentityUTRA-TDD: Additional E-UTRAN TDD - UTRAN TDD handover

Derivation Path: 36.331 clause 6.3.4			
Information Element	Value/remark	Comment	Condition
PhysCellIdUTRA-TDD ::= SEQUENCE {	12	This is the typical	
		value range used in	
		UTRAN TDD tests.	

Table 5.2.4.4.3-6: HANDOVER TO UTRAN COMMAND

Information Element	Value/remark
Downlink information common for all radio links	
 Downlink DPCH info common for all RL 	
- Timing indicator	Initialize
- Default DPCH Offset Value	0 Integer (07)

5.2.4.5 Test requirement

Tables 5.2.4.4.1-1, 5.2.4.5-1 and 5.2.4.5-2 define the primary level settings including test tolerances for E-UTRAN TDD - UTRAN TDD handover test.

Table 5.2.4.5-1: Cell Specific Test requirement Parameters for E-UTRAN TDD to UTRA TDD handover test case (Cell 1)

Parameter	Unit	Cell 1			
		T1	T2	T3	
E-UTRA RF Channel Number		1			
BW _{channel}	MHz	10			
OCNG Pattern defined in D.2.1 (OP.1 TDD) and in D.2.2 (OP.2 TDD)		OP.1	TDD	OP.2 TDD	
PBCH RA	dB				
PBCH_RB	dB				
PSS_RB	dB				
SSS_RB	dB				
PCFICH_PA	dB				
PHICH_PA	dB				
PHICH_PB	dB	0	0	0	
PDCCH_PA	dB				
PDCCH_PB	dB				
PDSCH_PA	dB				
PDSCH_PB	dB				
OCNG_RA ^{Note}	dB				
OCNG_RB ^{Note}	dB				
$[\hat{\mathbf{E}}_{\mathrm{s}}/\mathbf{I}_{\mathrm{ot}}]$	dB	11+TT	-3+TT	-3+TT	
\hat{E}_s/N_{oc}	dB	11+TT	-3+TT	-3+TT	
N_{oc}	dBm/15kHz		-98		
RSRP	dBm/15kHz	-87+TT	-101+TT	-101+TT	
SCH_RP	dBm/15 kHz	-87	-101	-101	
Propagation Condition			AWGN		
Note: OCNG shall be used such that cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					

Table 5.2.4.5-2: Cell Specific Test requirement Parameters for Cell 2 UTRAN TDD cell

Parameter	Unit	Cell 2 (UTRA)					
Timeslot Number			0			DwPTS	
		T1	T2	T3	T1	T2	T3
UTRA RF Channel Number*			Channel 2				
PCCPCH_Ec/lor	dB		-3				
DwPCH_Ec/lor	dB					0	
OCNS_Ec/lor	dB		-3				
$ \hat{I}_{or}/I_{oc} $	dB	-3+TT	11+TT	11+TT	-3+TT	11+TT	11+TT
I_{oc}	dBm/1.28 MHz	-80					
PCCPCH RSCP	dBm	-86+TT	-72+TT	-72+TT		n.a.	
Propagation Condition		AWGN					
* Note: In the case of multi-frequency cell, the UTRA RF Channel Number is the primary frequency's channel number.							

The handover delay is defined as the time from the beginning of time period T3, to the moment the UE start to transmit the channel to Cell 2.

The handover delay D_{handover} test requirement in this case is expressed as:

 $D_{handover} = maximum \ RRC \ procedure \ delay + T_{interrupt}$

$$T_{interrupt1} = T_{offset} + T_{UL} + 30*F_{SFN} + 20 + 10*F_{max} ms$$

 T_{offse} = 10 ms; The frame timing uncertainty between the old cell and the target cell and the time that can elapse until the appearance of a Beacon channel

 $T_{UL} = 10$ ms; The time that can elapse until the appearance of the UL timeslot in the target cell

 $F_{SEN} = 0$; Equal to 1 if SFN decoding is required and equal to 0 otherwise.

 $F_{max} = 0$; The maximum number of radio frames within the transmission time intervals of all transport channels that are multiplexed into the same CCTrCH.

Maximum RRC procedure delay = 50 ms as defined in TS 36.133

The handover delay D_{handover} shall be less than a total of 90 ms in this test case.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

5.2.5 E-UTRAN FDD - UTRAN TDD handover

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined

5.2.5.1 Test purpose

To verify the UE's ability to transfer a connection between the UE and E-UTRAN FDD to UTRAN TDD in RRC_CONNECTED state by meeting the UE RRC procedure delay and interruption time requirements.

5.2.5.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward that support UTRA TDD.

5.2.5.3 Minimum conformance requirements

5.2.5.3.1 3.84Mcps TDD option

Editor's note: FFS note: FFS

5.2.5.3.2 1.28Mcps TDD option

The handover delay $D_{handover}$ shall be less than maximum RRC procedure delay + $T_{interrupt}$ in RRC_CONNECTED state.

When the UE receives a RRC message implying E-UTRAN/UTRAN TDD handover the UE shall be ready to start the transmission of the new uplink DPCH or the SYNC-UL within $D_{handover}$ seconds from the end of the last TTI containing the RRC MOBILITY FROM E-UTRA command.

Where:

 $D_{handover}$ equals the RRC procedure delay, which is 50 ms plus the interruption time stated in TS 36.133 [4] clause 5.3.2.2.2.

The interruption time is the time between the end of the last TTI containing the RRC command on the E-UTRAN PDSCH and the time the UE starts transmission on the uplink DPCH or the SYNC-UL in UTRAN TDD, excluding the RRC procedure delay. The interruption time depends on whether the target cell is known to the UE or not. The target cell is known if it has been measured by the UE during the last 5 seconds otherwise it is unknown. The UE shall always perform a UTRA synchronisation procedure as part of the handover procedure.

If the target cell is known the interruption time shall be less than T_{interrupt1}. The T_{interrupt1} equation is defined as:

$$T_{interrupt1} = T_{offset} + T_{UL} + 30*F_{SFN} + 20 + 10*F_{max} ms$$

If the target cell is unknown the interruption time shall be less than T_{interrupt2}. The T_{interrupt2} equation is defined as:

$$T_{interrupt2} = T_{offset} + T_{UL} + 30*F_{SFN} + 180 + 10*F_{max} ms$$

Where:

T_{offset} Equal to 10 ms, the frame timing uncertainty between the old cell and the target cell and the time

that can elapse until the appearance of a Beacon channel

T_{UL} Equal to 10 ms, the time that can elapse until the appearance of the UL timeslot in the target cell

F_{SEN} Equal to 1 if SFN decoding is required and equal to 0 otherwise

 F_{max} denotes the maximum number of radio frames within the transmission time intervals of all

transport channels that are multiplexed into the same CCTrCH.

The interruption time requirements for an unknown target cell shall apply only if the signal quality of the unknown target cell is sufficient for successful synchronisation with one attempt.

The normative reference for this requirement is TS 36.133 [4] clause 5.3.1 and A.5.2.5.

5.2.5.3.2 7.68 Mcps TDD option

Editor's note: FFS

5.2.5.4 Test description

5.2.5.4.1 3.84Mcps TDD option

Editor's note: FFS

5.2.5.4.2 1.28Mcps TDD option

5.2.5.4.2.1Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A, Figure A.22.
- 2. The general test parameter settings are set up according to Table 5.2.5.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are defined in clause 5.2.5.4.3.
- 5. There is one E-UTRA FDD serving cell and one UTRATDD cell specified in the test. Cell 1 (E-UTRA FDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 5.2.5.4.2.1-1: General Test Parameters for E-UTRAN FDD - UTRAN TDD handover test case

Parameter		Unit	Value	Comment
PDSCH paramet	ers		DL Reference Measurement Channel R.0 FDD	As specified in section A. 1.1
PCFICH/PDCCH	/PHICH		DL Reference Measurement	As specified in section A. 2.1
parameters			Channel R.6 FDD	
Initial	Active cell		Cell 1	E-UTRA FDD cell
conditions	Neighbour cell		Cell 2	UTRA 1.28Mcps TDD Cell
Final	Active cell		Cell 2	
conditions				
Gap Pattern Id			1	As specified in 3GPP TS 36.133
				section 8.1.2.1.
E-UTRAN FDD n	neasurement		RSRP	
quantity				
UTRAN TDD me	asurement		RSCP	
quantity				
CP length of cell			Normal	
Access Barring Ir	nformation		Not Sent	No additional delays in random access procedure.
Hysteresis		dB	0	
Time To Trigger		dB	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	_
Ofn		dB	0	
Hys		dB	0	
Thresh1		dBm	-94	Absolute E-UTRAN RSRP
				threshold for event B2
Thresh2		dBm	-79	Absolute UTRAN RSCP
				threshold for event B2
T1		S	5	
T2		S	≤ 10	
T3		s	1	

5.2.5.4.2.2 Test procedure

The test scenario comprises of two cells, E-UTRA TDD cell1 and UTRA TDD cell2. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #1 as specified in TS 36.133 [4] Table 8.1.2.1-1 is configured before T2 begins to enable inter-RAT frequency monitoring.

A RRC message implying handover shall be sent to the UE during period T2, after the UE has reported Event B2. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain cell 2 as the target cell.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell
- 2. Set the parameters according to T1 in Table's 5.2.5.5.2-1 and 5.2.5.5.2-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table's 5.2.5.5.2.-1 and 5.2.5.5.2-2.
- 6. UE shall transmit a MeasurementReport message triggered by Event B2.
- 7. SS shall transmit a MobilityFromEUTRACommand message implying handover to Cell 2.

- 8. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T2 to T3 as specified in Tables 5.2.5.5-1 and 5.2.5.5-2.
- 9. If the UE transmits the UL DPCH Cell 2 less than [90] ms from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure testes is increased by one.
- 10. After T3 expires, the UE shall be switched off. Then ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 11. SS shall change set cell 2 cell parameter id =(current cell 2 cell parameter id +4) mod 16.
- 12. Repeat step 2-11 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.2.5.4.2.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 5.2.5.4.2.3-1: Common Exception messages for E-UTRAN FDD - UTRAN TDD handover

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-5 Table H.3.1-7 Table H.3.3-1 Table H.3.3-3

Table 5.2.5.4.2.3-2: ReportConfigInterRAT-B2-UTRA: Additional E-UTRAN FDD - UTRAN TDD handover

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
ReportConfigInterRAT-B2-UTRA(EUTRA-Thres,			
UTRA-Thres) ::= SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventB2 SEQUENCE {			
b2-Threshold1 CHOICE {			
threshold-RSRP	46 (-94 dBm)	-94 dBm EUTRA-	
		Thres is actual	
		threshold value in	
		dBm (46 - 140	
		dBm)	
}			
b2-Threshold2 CHOICE {			
b2-Threshold2UTRA CHOICE {			
utra-RSCP	36 (-79 dBm)	-79 dBm is actual	
		UTRA-Thres is	
		actual RSCP	
		value in dBm (36-	
		115dBm)	
}			
}			
}			
Hysteresis	0		
timeToTrigger	ms0		
}			
maxReportCells	6		
reportInterval	ms1024		
reportAmount	1		
1 Tepotramount	1		
}			

Table 5.2.5.4.2.3-3: MeasResults: Additional E-UTRAN FDD - UTRAN FDD handover

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1		
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}		'	
measResultNeighCells CHOICE {			
measResultListUTRA	MeasResultListUTRA		
}			
}			

Table 5.2.5.4.2.3-4: MeasResultListUTRA: Additional E-UTRAN FDD - UTRAN TDD handover

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId CHOICE {			
Tdd	UTRA-TDD-CellIdentity		
}			
cgi-Info SEQUENCE {			
cellGloballd	GlobalCellId-UTRA		
IocationAreaCode	Not present		
routingAreaCode	Not present		
plmn-IdentityList	Not present		
}			
measResult SEQUENCE {			
utra-RSCP	Set according to specific		
	test		
}		_	
}			

5.2.5.4.3 7.68 Mcps TDD option

Editor's note: FFS

5.2.5.5 Test requirement

5.2.5.5.1 3.84Mcps TDD option

Editor's note: FFS

5.2.5.5.2 1.28Mcps TDD option

Tables 5.2.5.4.2.1-1, 5.2.5.5.2-1 and 5.2.5.5.2-2 define the primary level settings including test tolerances for E-UTRAN FDD - UTRAN TDD handover test.

Table 5.2.5.5-1: Cell Specific Test requirement Parameters for Cell 1 E-UTRAN FDD cell

Parameter	Unit	Cell 1 (E-UTRA)				
		T1		T2		T3
E-UTRA RF Channel				1		
number						
BW _{channel}	MHz			10		
OCNG Patterns		OP.1 FDI	D	OP.1 FDD	(OP.2 FDD
defined in D.1.1 (OP.1						
FDD) and in D.1.2						
(OP.2 FDD)						
PBCH_RA	dB					
PBCH_RB	dB					
PSS_RA	dB					
SSS_RA	dB					
PCFICH_RB	dB					
PHICH_RA	dB					
PHICH_RB	dB			0		
PDCCH_RA	dB					
PDCCH_RB	dB					
PDSCH_RA	dB					
PDSCH_RB	dB					
OCNG_RA ^{Note 1}	dB					
OCNG_RB ^{Note 1}	dB					
\hat{E}_s/N_{oc}	dB	11 + T	Т	-3 + T	T	-3+ TT
N_{oc}	dBm/15 kHz			-98		
\hat{E}_s/I_{ot}	dB	11 + T	T	-3 + T	T	-3+ TT
RSRP	dBm/15 KHz	-87 + T	Т	-101 +	TT	-101+ TT
Propagation Condition		AWGN				
Note 1: OCNG shall be used such that both cells are fully allocated and a constant						

total transmitted power spectral density is achieved for all OFDM symbols.

Table 5.2.5.5-2: Cell Specific Test requirement Parameters for Cell 2 UTRAN TDD cell

Parameter	Unit	Cell 2 (UTRA)					
Timeslot Number			0			DwPTS	6
		T1	T2	T3	T1	T2	T3
UTRA RF Channel Number*		Channel 2					
PCCPCH_Ec/lor	dB		-3				
DwPCH_Ec/lor	dB				0		
OCNS_Ec/lor	dB		-3				
\hat{I}_{or}/I_{oc}	dB	-3 TT	11 TT	11 TT	ფ ∏	11 TT	11 TT
I_{oc}	dBm/1.28 MHz	-80					
PCCPCH RSCP	dBm	-86 -72 -72 TT TT TT n.a.					
Propagation Condition		AWGN					
* Note: In the case of multi-frequency cell, the UTRA RF Channel Number is the primary frequency's channel number.							

The handover delay is defined as the time from the beginning of time period T3, to the moment the UE start to transmit the UL DPCH to Cell 2.

The handover delay D_{handover} test requirement in this case is expressed as:

 $Handover \ delay \ D_{handover} = maximum \ RRC \ procedure \ delay + T_{interrupt}$

 $T_{interrupt1} = T_{offset} + T_{UL} + 30*F_{SFN} + 20 + 10*F_{max} \ ms$

 T_{offise} = 10 ms; The frame timing uncertainty between the old cell and the target cell and the time that can elapse until the appearance of a Beacon channel

 $T_{\rm UL} = 10$ ms; The time that can elapse until the appearance of the UL timeslot in the target cell

 $F_{SFN} = 0$; Equal to 1 if SFN decoding is required and equal to 0 otherwise.

 $F_{max} = 0$; The maximum number of radio frames within the transmission time intervals of all transport channels that are multiplexed into the same CCTrCH.

Maximum RRC procedure delay = 50 ms as defined in TS 36.331 [5] clause 11.2

The handover delay D_{handover} shall be less than a total of 90 ms in this test case.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

5.2.5.5.2 7.68 Mcps TDD option

Editor's note: FFS

5.2.6 E-UTRA TDD - GSM handover

5.2.6.1 Test purpose

To verify the UE's ability to transfer a connection between the UE and E-UTRAN to GSM in RRC_CONNECTED state by meeting the UE handover delay and interruption time requirements.

5.2.6.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward that support GSM.

5.2.6.3 Minimum conformance requirements

The handover delay $T_{Handover}$ delay shall be less than handover delay + T_{offset} + T_{UL} in RRC_CONNECTED state.

The handover delay given in table 5.2.6.3-1 and interruption time given in table 5.2.6.3-2 requirements for the case where the UE has not synchronised to the GSM cell before receiving the RRC MOBILITY FROM E-UTRA command are valid when the signal quality of the GSM cell is sufficient for successful synchronisation with one attempt. If the UE is unable to synchronise to the GSM cell on the first attempt, it shall continue to search for synchronisation information for up to 800 ms duration. If after 800 ms the UE has not synchronised to the GSM cell it shall follow the handover failure procedure specified in TS 36.331 [5].

When the UE receives a RRC MOBILITY FROM E-UTRA command the UE shall be ready to transmit (as specified in 3GPP TS 45.010 [13]) on the channel of the new RAT within the value defined in TS 36.133 [4] clause 5.3.3.2.1 and shown in table 5.2.3.3-1 from the end of the last TTI containing the RRC command.

The UE shall process the RRC procedures for the MOBILITY FROM E-UTRA command within 50 ms, which is noted as RRC procedure delay.

Table 5.2.6.3-1: E-UTRAN/GSM handover - handover delay

UE synchronisation status	handover delay [ms]
The UE has synchronised to the GSM cell before the	90
RRC MOBILITY FROM E-UTRA COMMAND is received	
The UE has not synchronised to the GSM cell before	190
RRC the MOBILITY FROM E-UTRA COMMAND is	
received	

The interruption time, i.e. the time between the end of the last TTI containing a transport block on the old channel and the time the UE is ready to transmit on the new channel, shall be less than the value defined in TS 36.133 [4] clause 5.3.3.2.1 and shown in table 5.2.3.3-2:

Table 5.2.6.3-2: E-UTRAN/GSM handover - interruption time

Synchronisation status	Interruption time [ms]
The UE has synchronised to the GSM cell before the	40
RRC MOBILITY FROM E-UTRA COMMAND is received	
The UE has not synchronised to the GSM cell before the	140
RRC MOBILITY FROM E-UTRA COMMAND is received	

The normative reference for this requirement is TS 36.133 [4] clause 5.3.3 and A.5.2.3.

5.2.6.4 Test description

5.2.6.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A, Figure A.14.
- 2. The general test parameter settings are set up according to Table 5.2.6.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 5.2.6.4.3.
- 5. There is one E-UTRA TDD serving cell and one GSM cell specified in the test. Cell 1 (E-UTRA TDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 5.2.6.4.1-1: General Test Parameters for E-UTRAN TDD - GSM handover test case

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference Measurement	As specified in section A.1.2
·		Channel R.0 TDD	·
PCFICH/PDCCH/PHICH		DL Reference Measurement	As specified in section A.2.2
parameters		Channel R.6 TDD	·
Gap Pattern Id		1	As specified in TS 36.133 [4]
•			section 8.1.2.1.
Initial conditions Active cell		Cell 1	
Neighbour cell		Cell 2	
Final conditions Active cell		Cell 2	
Uplink-downlink configuration of cell 1		1	As specified in table 4.2.2 in TS 36.211 [9]
Special subframe configuration of cell 1		6	As specified in table 4.2.1 in TS 36.211 [9]
CP length of cell 1		Normal	
Inter-RAT measurement quantity		GSM Carrier RSSI	
Threshold other system	dBm	-80	Absolute GSM carrier RSSI
			threshold for event B1.
Hysteresis	dB	0	
Time to Trigger	ms	0	
Filter coefficient		0	L3 filtering is not used
DRX			OFF
Tidentify,gsm	ms	5040	Based on Table 8.1.2.4.5.1.2.1-1
			in TS 36.133 [4]
T _{reconfirm,gsm}	ms	4800	Based on Table 8.1.2.4.5.1.2.1-1
			in TS 36.133 [4]
T1	S	20	
T2	S	5	
T3	S	1	

5.2.6.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of Cell 2. The RRC message implying handover to Cell 2 shall be sent to the UE during T2, after the UE has reported Event B1. T3 is defined as the end of the last E-UTRAN TTI containing the RRC message implying handover. The requirements are also applicable for a UE not requiring measurement gap, in which case no measurement gap pattern is sent.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell
- 2. Set the parameters according to T1 in Table's 5.2.6.5-1 and 5.2.6.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table's 5.2.6.5-1 and 5.2.6.5-2.
- 6. UE shall transmit a MeasurementReport message triggered by Event B1.
- 7. SS shall transmit a MobilityFromEUTRACommand message implying handover to Cell 2.
- 8. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T2 to T3 as specified in Table 5.2.6.5-2.
- 9. If the UE sends access bursts on the new DCCH to Cell 2 less than 100 ms from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure testes is increased by one.
- 10. After T3 expires, the UE shall be switched off. Then ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2 . Cell 1 is the active cell.
- 11. The SS shall set a different BSIC on Cell 2, as the previous timing information of Cell 2 is invalid in the UE for the next iteration of the test procedure loop.
- 12. Repeat step 2-11 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.2.6.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 5.2.6.4.3-1: Common Exception messages for E-UTRAN TDD - GSM handover

Default Message Contents				
Common contents of system information				
blocks exceptions				
Default RRC messages and information	Table H.3.1-1			
elements contents exceptions	Table H.3.1-7			
	Table H.3.3-2			
	Table H.3.3-3			

Table 5.2.6.4.3-2: SystemInformationBlockType7: Additional E-UTRAN TDD - GSM handover

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-3 SystemInformationBlockType7					
Information Element	Value/remark	Comment	Condition		
commonInfo SEQUENCE {					
p-MaxGERAN	33 (33 dBm)		GSM 400 &		
			GSM 900 &		
			GSM 850 &		
			GSM 700		
	30 (30 dBm)		DCS 1800		
			& PCS 1900		
}					

Table 5.2.6.4.3-3: MeasurementConfiguration-DEFAULT: Additional E-UTRAN TDD - GSM handover

Derivation Path: TS 36.508 [7] clause 4.6.6, Table	4.6.6-1 MeasurementConfiguration	n-DEFAULT	
Information Element	Value/remark	Comment	Condition
MeasurementConfiguration-DEFAULT ::=			
SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModifyList	Not present		
reportConfigToRemoveList	Not present		
reportConfigToAddModifyList	ReportConfigInterRAT-B1-		
	GERAN		
measIdToRemoveList	Not present		
measIdToAddModifyList	Not present		
quantityConfig	QuantityConfig-DEFAULT		
measGapConfig	MeasGapConfig-GP2		
s-Measure	Not present		
hrpd-PreRegistrationInfo	Not present		
mbsfn-NeighbourCellConfig	Not present		
speedDependentParameters	Not present		
}			

Table 5.2.6.4.3-4: ReportConfigInterRAT-B1-GERAN: Additional E-UTRAN TDD - GSM handover

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
ReportConfigInterRAT-B1-GERAN(GERAN-Thres)			
::= SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventB1 SEQUENCE {			
b1-Threshold CHOICE {			
B1-Threshold-GERAN CHOICE {			
thresholdGERAN	30 (-80 dBm)	-80 is actual value in dBm (30 - 110 dBm)	

Table 5.2.6.4.3-5: MeasResults: Additional E-UTRAN TDD - GSM handover

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
measResultListGERAN	MeasResultListGERAN		
}			
}			

Table 5.2.6.4.3-6: MeasResultListGERAN: Additional E-UTRAN TDD - GSM handover

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListGERAN ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physicalCellIdentity SEQUENCE {			
Geran-CarrierFreq	GERAN-CarrierFreq	Contains the carrier frequency of the target GERAN cell	
Geran-CellIdentity	GERAN-CellIdentity	Contains the Base Station Identity Code (BSIC) and is used %%	
}			
globalCellIdentity SEQUENCE {			
globalcelIID-GERAN	GlobalCellId-GERAN		
rac-ld	Not present		
}			
measResult SEQUENCE {			
Rssi		Set according to specific test	
}	<u> </u>		
}			

5.2.6.5 Test requirement

Tables 5.2.6.4.1-1, 5.2.6.5-1 and 5.2.6.5-2 defines the primary level settings including test tolerances for E-UTRAN TDD to GSM handover test case.

Table 5.2.6.5-1: Cell Specific Test requirement Parameters for Cell 1 E-UTRAN TDD cell

Parameter	Unit	Cell 1		
	1	T1, T2	T3	
E-UTRA RF Channel Number		1		
BW _{channel}	MHz	10)	
OCNG Patterns defined in D.2.1 (OP.1 TDD) and in D.2.2 (OP.2 TDD)		OP.1 TDD	OP.2 TDD	
PBCH_RA	dB			
PBCH_ RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_ RB	dB			
PHICH_ RA	dB	0		
PHICH_ RB	dB			
PDCCH_ RA	dB			
PDCCH_ RB	dB			
PDSCH_ RA	dB			
PDSCH_ RB	dB			
OCNG_ RA Note1	dB			
OCNG_ RB Note1	dB			
\hat{E}_s/N_{oc}	dB	4		
$N_{\ oc}$ Note 2	dBm/15 kHz	-98 (AV	VGN)	
\hat{E}_s/I_{ot}	dB	4		
RSRP Note 3	dBm/15kHz	-94	4	
Propagation Condition		AWGN		
Note 1: OCNG shall be used so	uch that cell 1 is	fully allocated and a constant	total transmitted power	

Note 1: OCNG shall be used such that cell 1 is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{ac} to be fulfilled.

Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 5.2.6.5-2: Cell Specific Test requirement Parameters for Cell 2 GSM cell

Parameter	Unit	Cell 2 (GSM)		
Parameter	Onit	T1	T2, T3	
Absolute RF Channel Number		ARFC	N 1	
RXLEV	dBm	-85	-75	

The handover delay is defined as the time from the beginning of time period T3, to the moment the UE start to send access bursts on the new DCCH to Cell 2.

The handover delay $T_{\mbox{\scriptsize Handover delay}}$ test requirement in this case is expressed as:

 $Handover \ delay \ T_{Handover \ delay} = handover \ delay + T_{offset} + T_{UL}$

Handover delay = 90 ms; this is based on handover delay value as defined in Table 5.2.6.3.-1

 $T_{\text{offset}} = 4.65 \text{ ms}$; GSM timing uncertainty between the time from when the UE is ready to transmit until the start of the next timeslot in GSM 26 multiframe structure

 $T_{UL} = 4.65$ ms; the time the UE has to wait in case the next timeslot is an idle frame or a SACCH frame

The handover delay $T_{\text{Handover delay}}$ shall be less than a total of 100 ms in this test case (note: this gives a total of 99.3 ms but the test allows 100 ms).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

5.2.7 E-UTRAN FDD - UTRAN FDD handover: unknown target cell

5.2.7.1 Test purpose

To verify the UE's ability to transfer a connection between the UE and E-UTRAN to UTRAN handover: unknown target cell in RRC_CONNECTED state by meeting the handover to an unknown target cell delay requirements.

5.2.7.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward that support UTRA FDD.

5.2.7.3 Minimum conformance requirements

The handover delay $D_{handover}$ shall be less than maximum RRC procedure delay + $T_{interrupt}$ in RRC_CONNECTED state.

When the UE receives a RRC message implying handover to UTRAN the UE shall be ready to start the transmission of the new UTRA uplink DPCCH within $D_{handover}$ seconds from the end of the last E-UTRAN TTI containing the RRC MOBILITY FROM E-UTRA command.

Where:

 $D_{handover}$ equals the RRC procedure delay, which is 50 ms plus the interruption time stated in TS 36.133 [4] clause 5.3.1.1.2.

The interruption time is the time between the end of the last TTI containing the RRC command on the E-UTRAN PDSCH and the time the UE starts transmission on the uplink DPCCH in UTRAN FDD, excluding the RRC procedure delay. The interruption time depends on whether the target cell is known to the UE or not. The target cell is known if it has been measured by the UE during the last 5 seconds otherwise it is unknown. The UE shall always perform a UTRA synchronisation procedure as part of the handover procedure.

If the target cell is known the interruption time shall be less than T_{interrupt1}. The T_{interrupt1} equation is defined as:

$$T_{interrupt1} = T_{IU} + T_{sync} + 50 + 10*F_{max} ms$$

If the target cell is unknown the interruption time shall be less than $T_{interrupt2}$. The $T_{interrupt2}$ equation is defined as:

$$T_{interrupt2} = T_{IU} + T_{sync} + 150 + 10*F_{max} ms$$

This requirement shall be met, provided that there is one target cell in the MOBILITY FROM E-UTRA command. When UE is connected to an E-UTRA cell, UTRA SFN timing measurements are not reported. This implies that the timing of the DPCH of the UTRA target cells in the active set cannot be configured by UTRAN to guarantee that all target cells fall within the UE reception window of T_0 +/- 148 chips.

Where:

 T_{IU} is the interruption uncertainty when changing the timing from the E-UTRAN to the new UTRAN cell. T_{IU} can be up to one UTRA frame (10 ms).

 F_{max} denotes the maximum number of radio frames within the transmission time intervals of all transport channels that are multiplexed into the same CCTrCH on the UTRA target cell.

 T_{sync} is the time required for measuring the downlink DPCCH channel as stated in TS 25.214 [12] clause 4.3.1.2. In case higher layers indicate the usage of a post-verification period $T_{sync} = 0$ ms. Otherwise $T_{sync} = 40$ ms.

The phase reference is the UTRA primary CPICH.

The requirements assume that N311 has the smallest possible value i.e. only one "in_sync" is required.

The normative reference for this requirement is TS 36.133 [4] clause 5.3.1 and A.5.2.7.

5.2.7.4 Test description

5.2.7.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A, Figure A.22.
- 2. The general test parameter settings are set up according to Table 5.2.7.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are defined in clause 5.2.7.4.3.
- 5. There is one E-UTRA FDD serving cell and one UTRA FDD cell specified in the test. Cell 1 (E-UTRA FDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 5.2.7.4.1-1: General Test Parameters for E-UTRAN FDD - UTRAN FDD handover: unknown target cell test case

Para	ameter	Unit	Value	Comment
PDSCH parameter	'S		DL Reference Measurement Channel R.0 FDD	As specified in section A.1.1
PCFICH/PDCCH/F	PHICH parameters		DL Reference Measurement Channel R.6 FDD	As specified in section A.2.1
Initial conditions	Active cell		Cell 1	E-UTRAN cell
	Neighbouring cell		Cell 2	UTRAN cell
Final condition	Active cell		Cell 2	UTRAN cell
Channel Bandwidtl	h (BW _{channel})	MHz	10	
E-UTRAN FDD me	easurement quantity		RSRP	
Inter-RAT (UTRAN	FDD) measurement		CPICH Ec/N0	
quantity				
DRX			OFF	Non-DRX test
Access Barring Info	ormation	-	Not sent	No additional delays in random access procedure
E-UTRA RF Chann	nel Number		1	One E-UTRA FDD carrier frequency is used.
E-UTRA Channel E (BWchannel)	Bandwidth	MHz	10	
UTRA RF Channel	Number		1	One UTRA FDD carrier frequency is used.
Monitored UTRA F	DD cell list size		12	UTRA cells on UTRA RF channel 1 provided in the cell before T2.
Post-verification pe	eriod		False	
T1		S	≤5	
T2		s	1	

5.2.7.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE may not have any timing information of Cell 2. A RRC message implying handover shall be sent to the UE during period T1. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. Starting T2, Cell 2 becomes detectable and the UE receives a RRC handover command from the network.

1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.

- 2. Set the parameters according to T1 in Table's 5.2.7.5-1 and 5.2.7.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. SS shall transmit a MobilityFromEUTRACommand message implying handover to Cell 2.
- 4. The start of T2 is the instant when the last TTI containing the RRC MobilityFromEUTRACommand message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T1 to T2 as specified in Tables 5.2.7.5-1 and 5.2.7.5-2. T2 starts.
- 5. If the UE transmits the UL DPCCH to Cell 2 less than 290 ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure testes is increased by one.
- 6. After T2 expires, the UE shall be switched off. Then ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 7. The SS shall set Cell 2 primary scrambling code = ((current cell 2 primary scrambling code 50) mod 200 + 100) for next iteration of the test procedure loop.
- 8. Repeat step 2-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.2.7.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 5.2.7.4.3-1: Common Exception messages for E-UTRAN FDD - UTRAN FDD handover: unknown target cell test requirement

Default Message Contents	
Common contents of system information	
blocks exceptions	
Default RRC messages and information	Table H.3.1-1
elements contents exceptions	Table H.3.1-7
	Table H.3.3-1
	Table H.3.3-3

Table 5.2.7.4.3-2: *MeasResults*: Additional E-UTRAN FDD - UTRAN FDD handover: unknown target cell test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultsServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
measResultNeighCells CHOICE {			
measResultListUTRA }	MeasResultListUTRA		
}			

Table 5.2.7.4.3-3: MeasResultListUTRA: Additional E-UTRAN FDD - UTRAN FDD handover: unknown target cell test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId CHOICE {			
fdd	PhysCellIdUTRA-FDD		
}			
cgi-Info SEQUENCE {			
cellGloballd	CellGloballdUTRA		
IcoatonAreaCode	Not present		
routingAreaCode	Not present		
plmn-IdentityList	Not present		
}			
measResult SEQUENCE {			
utra-RSCP		Set according to	
		specific test	
utra-EcN0		Set according to	
		specific test	
}			
}			

Table 5.2.7.4.3-4: *PhysCellIdentityUTRA-FDD*: Additional E-UTRAN FDD - UTRAN FDD handover: unknown target cell test requirement

Derivation Path: 36.331 clause 6.3.4			
Information Element	Value/remark	Comment	Condition
PhysCellIdUTRA-FDD ::= SEQUENCE {	250	This is the typical	
		value range used in	
		UTRAN FDD tests.	

Table 5.2.7.4.3-5: HANDOVER TO UTRAN COMMAND

Information Element	Value/remark
Downlink information common for all radio links	
 Downlink DPCH info common for all RL 	
- Timing indicator	Initialize
- Default DPCH Offset Value	Arbitrary set to value 0306688 by step of 512

5.2.7.5 Test requirement

Tables 5.2.7.4.1-1, 5.2.7.5-1 and 5.2.7.5-2 define the primary level settings including test tolerances for E-UTRAN FDD - UTRAN FDD handover: unknown target cell test.

Table 5.2.7.5-1: Cell Specific Test requirement Parameters for Cell 1 in E-UTRAN FDD handover: unknown target cell test

Parameter	Unit	Cell 1 (E-UTRA)		
		T1	T2	
E-UTRA RF Channel			1	
number				
BW _{channel}	MHz		10	
OCNG Patterns defined in		OP.1 FDD	OP.2 FDD	
D.1.1 (OP.1 FDD) and in				
D.1.2 (OP.2 FDD)	-			
PBCH_RA	dB			
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB	0		
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RANote 1	dB			
OCNG_RB ^{Note 1}	dB		1	
\hat{E}_s/I_{ot}	dB	0	0	
$N_{oc}^{ m Note 2}$	dBm/15 kHz	-	98	
\hat{E}_s/N_{oc}	dB	0	0	
RSRP Note 3	dBm/15 KHz	-98	-98	
Propagation Condition AWGN				
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Tot all of Bitt dyffibolo.				

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time

and shall be modelled as AWGN of appropriate power for $\frac{N_{oc}}{N_{oc}}$

Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 5.2.7.5-2: Cell Specific Test requirement Parameters for Cell 2 in E-UTRAN - UTRAN FDD handover: unknown target cell test

Parameter	Unit	Unit Cell 2 (UTRA)		
		T1	T2	
CPICH_Ec/lor	dB	-	-10	
PCCPCH_Ec/lor	dB	-	·12	
SCH_Ec/lor	dB	-	·12	
PICH_Ec/lor	dB	-15		
DCH_Ec/lor	dB	Note 1		
OCNS_Ec/lor	dB	dB Note 2		
\hat{I}_{or}/I_{oc}	dB	-infinity	-1.8	
I_{oc}	dBm/3,84 MHz	-70	-70	
CPICH_Ec/lo	dB	-infinity	-14	
Propagation Condition		AWGN		

Note 1: The DPCH level is controlled by the power control loop

Note 2: The power of the OCNS channel that is added shall make the total power from the cell to be equal to I_{or}.

The handover to an unknown target cell delay is defined as the time from the beginning of time period T2, to the moment the UE start to transmit the UL DPCCH to Cell 2.

The handover to an unknown target cell delay test requirement in this case is expressed as:

Handover delay $D_{handover} = maximum RRC$ procedure delay $+ T_{interrupt2}$ (note: the target cell is unknown)

$$T_{interrupt2} = T_{IU} + T_{sync} + 150 + 10*F_{max} \ ms$$

 $T_{IU} = 10 \text{ ms}$; T_{IU} can be up to one UTRA frame (10 ms).

 F_{max} = 4 radio frames; The maximum radio frames within the transmission time intervals to fit into DCCH with 40 ms TTI

 $T_{sync} = 40 \text{ ms}$; In case higher layers indicate the usage of a post-verification period $T_{sync} = 0 \text{ ms}$. Otherwise $T_{sync} = 40 \text{ ms}$

Maximum RRC procedure delay = 50 ms as defined in TS 36.331 [5] clause 11.2

The handover to an unknown target cell delay shall be less than a total of 290 ms in this test case (note: this gives a total of 50 ms for maximum RRC procedure delay plus 240 ms for $T_{interrupt2}$).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

5.2.8 E-UTRAN FDD - GSM handover: unknown target cell

5.2.8.1 Test purpose

To verify the UE's ability to transfer a connection between the UE and E-UTRAN to GSM handover: unknown target cell in RRC_CONNECTED state by meeting the handover to an unknown target cell delay requirements.

5.2.8.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward that support GSM.

5.2.8.3 Minimum conformance requirements

The handover delay $T_{Handover\,delay}$ shall be less than handover delay + T_{offset} + T_{UL} in RRC_CONNECTED state.

The handover delay given in table 5.2.8.3-1 and interruption time given in table 5.2.8.3-2 requirements for the case where the UE has not synchronised to the GSM cell before receiving the RRC MOBILITY FROM E-UTRA command are valid when the signal quality of the GSM cell is sufficient for successful synchronisation with one attempt. If the UE is unable to synchronise to the GSM cell on the first attempt, it shall continue to search for synchronisation information for up to 800 ms duration. If after 800 ms the UE has not synchronised to the GSM cell it shall follow the handover failure procedure specified in TS 36.331 [5].

When the UE receives a RRC MOBILITY FROM E-UTRA command the UE shall be ready to transmit (as specified in 3GPP TS 45.010 [13]) on the channel of the new RAT within the value defined in TS 36.133 [4] clause 5.3.3.2.1 and shown in table 5.2.8.3-1 from the end of the last TTI containing the RRC command.

The UE shall process the RRC procedures for the MOBILITY FROM E-UTRA command within 50 ms, which is noted as RRC procedure delay.

Table 5.2.8.3-1: E-UTRAN/GSM handover - handover delay

UE synchronisation status	handover delay [ms]
The UE has synchronised to the GSM cell before the	90
RRC MOBILITY FROM E-UTRA COMMAND is received	
The UE has not synchronised to the GSM cell before	190
RRC the MOBILITY FROM E-UTRA COMMAND is	
received	

The interruption time is the time between the end of the TTI containing the RRC command on the E-UTRAN PDSCH and the time the UE starts transmission on the uplink channel in GSM, excluding the RRC procedure delay. The interruption time depends on whether the UE has synchronized to the target GSM cell or not and shall be less than the value defined in TS 36.133 [4] clause 5.3.3.2.1 and shown in table 5.2.8.3-2.

Table 5.2.3.3-2: E-UTRAN/GSM handover - interruption time

Synchronisation status	Interruption time [ms]
The UE has synchronised to the GSM cell before the	40
RRC MOBILITY FROM E-UTRA COMMAND is received	
The UE has not synchronised to the GSM cell before the	140
RRC MOBILITY FROM E-UTRA COMMAND is received	

The normative reference for this requirement is TS 36.133 [4] clause 5.3.3 and A.5.2.8.

5.2.8.4 Test description

5.2.8.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A, Figure A.14.
- 2. The general test parameter settings are set up according to Table 5.2.8.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 5.2.8.4.3.
- 5. There is one E-UTRA FDD serving cell and one GSM cell specified in the test. Cell 1 (E-UTRA FDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 5.2.8.4.1-1: General Test Parameters for E-UTRAN FDD - GSM handover: unknown target cell test case

Parameter		Unit	Value	Comment
PDSCH parameters			DL Reference Measurement	As specified in section A.1.1
·			Channel R.0 FDD	
PCFICH/PDCCH/	PCFICH/PDCCH/PHICH		DL Reference Measurement	As specified in section A.2.1
parameters	parameters		Channel R.6 FDD	
Gap Pattern Id			None	No measurement gaps shall be
				provided.
Initial conditions	Active cell		Cell 1	
	Neighbour cell		Cell 2	
Final conditions	Active cell		Cell 2	
DRX			OFF	No DRX configured
T1		S	≤7	
T2		S	1	

5.2.8.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE may not have any timing information of Cell 2. A RRC message implying handover shall be sent to the UE during period T1. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. Starting T2, Cell 2 becomes detectable and the UE receives a RRC handover command from the network.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 2. Set the parameters according to T1 in Table's 5.2.8.5-1 and 5.2.8.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. The neighbour cell shall broadcast its own BSIC, SS shall transmit a MobilityFromEUTRACommand message implying handover to Cell 2.
- 4. The start of T2 is the instant when the last TTI containing the RRC MobilityFromEUTRACommand message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T1 to T2 as specified in Table 5.2.8.5-1 and 5.2.8.5-2. T2 starts.
- 5. If the UE sends access bursts on the new DCCH to Cell 2 less than 200 ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure testes is increased by one.
- 6. After T2 expires, the UE shall be switched off. Then ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 7. The SS shall set a different BSIC on Cell 2, as the previous timing information of Cell 2 is invalid in the UE for the next iteration of the test procedure loop.
- 8. Repeat step 2-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.2.8.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 5.2.8.4.3-1: Common Exception messages for E-UTRAN FDD - GSM handover: unknown target cell test requirement

Default Message Contents	
Common contents of system information	
blocks exceptions	
Default RRC messages and information	Table H.3.1-1
elements contents exceptions	Table H.3.1-7
·	Table H.3.3-2
	Table H.3.3-3

Table 5.2.8.4.3-2: SystemInformationBlockType7: Additional E-UTRAN FDD - GSM handover: unknown target cell test requirement

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-3 SystemInformationBlockType7				
Information Element	Value/remark	Comment	Condition	
commonInfo SEQUENCE {				
p-MaxGERAN	33 (33 dBm)		GSM 400 &	
			GSM 900 &	
			GSM 850 &	
			GSM 700	
	30 (30 dBm)		DCS 1800	
			& PCS 1900	
}				

Table 5.2.8.4.3-3: *MeasResults*: Additional E-UTRAN FDD - GSM handover: unknown target cell test requirement

Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultsServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListGERAN }	MeasResultListGERAN		
}			

Table 5.2.8.4.3-4: MeasResultListGERAN: Additional E-UTRAN FDD - GSM handover: unknown target cell test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListGERAN ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
MeasResultGERAN SEQUENCE {			
carrierFreq	CarrierFreqGERAN	Contains the carrier frequency of the target GERAN cell	
physCellId	PhysCellIdGERAN	Contains the Base Station Identity Code (BSIC)	
}			
cgi-Info SEQUENCE {			
cellGloballd	CellGlobalIdGERAN		
routingAreaCode	Not present		
}			
measResult SEQUENCE {			
rssi		Set according to specific test	
}			
}			

5.2.8.5 Test requirement

Tables 5.2.8.4.1-1, 5.2.8.5-1 and 5.2.8.5-2 defines the primary level settings including test tolerances for E-UTRAN FDD to GSM handover: unknown target cell test.

Table 5.2.8.5-1: Cell Specific Test requirement Parameters for Cell 1 in E-UTRAN FDD - GSM handover: unknown target cell test

Parameter	Unit	Cell 1		
		T1	T2	
BW _{channel}	MHz	10		
OCNG Patterns				
defined in D.1.1		OP.1 FDD	OP.2 FDD	
(OP.1 FDD) and in		01.1122	01.2188	
D.1.2 (OP.2 FDD)				
PBCH_RA	dB			
PBCH_ RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_ RB	dB			
PHICH_ RA	dB	0		
PHICH_ RB	dB			
PDCCH_ RA	dB			
PDCCH_ RB	dB			
PDSCH_RA	dB			
PDSCH_ RB	dB			
OCNG_ RA Note1	dB			
OCNG_ RB Note1	dB			
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	dB		4	
$N_{oc}^{ m Note~2}$	dBm/15 kHz		-98	
\hat{E}_s/N_{oc}	dB		4	

RSRP Note 3 dBm/15 kHz		dBm/15 kHz	-94	
Propagation			AWGN	
Condition	l		7117-017	
Note 1:	Note 1: OCNG shall be used such that cell 1 is fully allocated and a constant total			
	transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	· · · · · · · · · · · · · · · · · · ·			
	assumed to be constant over subcarriers and time and shall be modelled as			
N				
	AWGN of appropriate power for $\stackrel{ extstyle N}{\circ c}$ to be fulfilled.			
Note 3:	RSRP levels have been derived from other parameters for information			
purposes. They are not settable parameters themselves.				

Table 5.2.8.5-2: Cell Specific Test requirement Parameters for Cell 2 in E-UTRAN FDD - GSM handover: unknown target cell test

Parameter	Unit	Cell 2 (GSM)		
Farameter		T1	T2	
Absolute RF Channel		ARECN 1		
Number		ARFONT		
RXLEV	dBm	-Infinity	-75	

The handover to an unknown target cell delay is defined as the time from the beginning of time period T2, to the moment the UE start to send access bursts on the new DCCH to Cell 2.

The handover to an unknown target cell delay test requirement in this case is expressed as:

Handover delay $T_{Handover delay}$ = handover delay + T_{offset} + T_{UL}

Handover delay = 190 ms; this is based on handover delay value as defined in Table 5.2.3.3.-1

 $T_{offset} = 4.65$ ms; GSM timing uncertainty between the time from when the UE is ready to transmit until the start of the next timeslot in GSM 26 multiframe structure

 $T_{UL} = 4.65$ ms; the time the UE has to wait in case the next timeslot is an idle frame or a SACCH frame

The handover to an unknown target cell delay shall be less than a total of 200 ms in this test case (note: this gives a total of 199.3 ms but the test allows 200 ms).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

5.2.9 E-UTRAN TDD - GSM handover: unknown target cell

5.2.9.1 Test purpose

To verify the UE's ability to transfer a connection between the UE and E-UTRAN TDD to GSM in RRC_CONNECTED state by meeting the UE RRC procedure delay and interruption time requirements when the target cell is unknown.

5.2.9.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward that support GSM.

5.2.9.3 Minimum conformance requirements

The handover delay $T_{Handover\,delay}$ shall be less than handover delay + T_{offset} + T_{UL} in RRC_CONNECTED state.

The handover delay given in table 5.2.9.3-1 and interruption time given in table 5.2.9.3-2 requirements for the case where the UE has not synchronised to the GSM cell before receiving the RRC MOBILITY FROM E-UTRA command are valid when the signal quality of the GSM cell is sufficient for successful synchronisation with one attempt. If the UE

is unable to synchronise to the GSM cell on the first attempt, it shall continue to search for synchronisation information for up to 800 ms duration. If after 800 ms the UE has not synchronised to the GSM cell it shall follow the handover failure procedure specified in TS 36.331 [5].

When the UE receives a RRC MOBILITY FROM E-UTRA command the UE shall be ready to transmit (as specified in 3GPP TS 45.010 [13]) on the channel of the new RAT within the value defined in TS 36.133 [4] clause 5.3.3.2.1 and shown in table 5.2.9.3-1 from the end of the last TTI containing the RRC command.

The UE shall process the RRC procedures for the MOBILITY FROM E-UTRA command within 50 ms, which is noted as RRC procedure delay.

Table 5.2.9.3-1: E-UTRAN/GSM handover - handover delay

UE synchronisation status	handover delay [ms]
The UE has synchronised to the GSM cell before the	90
RRC MOBILITY FROM E-UTRA COMMAND is received	
The UE has not synchronised to the GSM cell before	190
RRC the MOBILITY FROM E-UTRA COMMAND is	
received	

The interruption time is the time between the end of the TTI containing the RRC command on the E-UTRAN PDSCH and the time the UE starts transmission on the uplink channel in GSM, excluding the RRC procedure delay. The interruption time depends on whether the UE has synchronized to the target GSM cell or not and shall be less than the value defined in TS 36.133 [4] clause 5.3.3.2.1 and shown in table 5.2.9.3-2.

Table 5.2.9.3-2: E-UTRAN/GSM handover - interruption time

Synchronisation status	Interruption time [ms]
The UE has synchronised to the GSM cell before the	40
RRC MOBILITY FROM E-UTRA COMMAND is received	
The UE has not synchronised to the GSM cell before the	140
RRC MOBILITY FROM E-UTRA COMMAND is received	

The normative reference for this requirement is TS 36.133 [4] clause 5.3.3 and A.5.2.9.

5.2.9.4 Test description

5.2.9.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A, Figure A.14.
- 2. The general test parameter settings are set up according to Table 5.2.9.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 5.2.9.4.3.
- 5. There is one E-UTRA TDD serving cell and one GSM cell specified in the test. Cell 1 (E-UTRA TDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 5.2.9.4.1-1: General Test Parameters for E-UTRAN TDD to GSM handover test case; unknown target cell

Parameter		Unit	Value	Comment
PDSCH paramete	ers		DL Reference Measurement Channel R.0 TDD	As specified in section A.1.2
PCFICH/PDCCH, parameters	/PHICH		DL Reference Measurement Channel R.6 TDD	As specified in section A.2.2
Gap Pattern Id			None	No measurement gaps shall be provided.
Initial conditions	Active cell		Cell 1	
	Neighbour cell		Cell 2	
Final conditions	Active cell		Cell 2	
DRX			OFF	No DRX configured
Special subframe	configuration		6	As specified in table 4.2-1 in 3GPP TS 36.211[8]
Uplink-downlink o	configuration		1	As specified in table 4.2-2 in 3GPP TS 36.211[8]
T1		S	≤7	
T2		S	1	

5.2.9.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The test consists of two successive time periods, with time duration of T1, T2 respectively. At the start of time duration T1, the UE will not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. No Gap pattern configuration shall be used.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 2. Set the parameters according to T1 in Table's 5.2.9.5-1 and 5.2.9.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. The neighbour cell shall broadcast its own BSIC, SS shall transmit a MobilityFromEUTRACommand message implying handover to Cell 2.
- 4. The start of T2 is the instant when the last TTI containing the RRC MobilityFromEUTRACommand message implying handover is sent to the UE, At that instant the SS shall switch the power settings from T1 to T2 as specified in Table 5.2.9.5-1 and 5.2.9.5-2. T2 starts.
- 5. If the UE sends access bursts on the new DCCH to Cell 2 less than 200 ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure testes is increased by one.
- 6. After T2 expires, the UE shall be switched off. Then ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 7. The SS shall set a different BSIC on Cell 2, as the previous timing information of Cell 2 is invalid in the UE for the next iteration of the test procedure loop.
- 8. Repeat step 2-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.2.9.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 5.2.9.4.3-1: Common Exception messages for E-UTRAN TDD - GSM handover: unknown target cell test requirement

Default Message Contents	
Common contents of system information	
blocks exceptions	
Default RRC messages and information	Table H.3.1-1
elements contents exceptions	Table H.3.1-7
	Table H.3.3-2
	Table H.3.3-3

Table 5.2.9.4.3-2: SystemInformationBlockType7: Additional E-UTRAN TDD - GSM handover: unknown target cell test requirement

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-3 SystemInformationBlockType7				
Information Element	Value/remark	Comment	Condition	
commonInfo SEQUENCE {				
p-MaxGERAN	33 (33 dBm)		GSM 400 &	
			GSM 900 &	
			GSM 850 &	
			GSM 700	
	30 (30 dBm)		DCS 1800	
			& PCS 1900	
}				

Table 5.2.9.4.3-3: *MeasResults*: Additional E-UTRAN TDD - GSM handover: unknown target cell test requirement

Value/remark	Comment	Condition
1 3333 573 5333 53		
1	Identifies the measurement id for the reporting being performed	
	Set according to specific test	
	Set according to specific test	
MeasResultListGERAN		
	1	1 Identifies the measurement id for the reporting being performed Set according to specific test Set according to specific test

Table 5.2.9.4.3-4: *MeasResultListGERAN:* Additional E-UTRAN TDD - GSM handover: unknown target cell test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListGERAN ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
MeasResultGERAN SEQUENCE {			
carrierFreq	CarrierFreqGERAN	Contains the carrier frequency of the target GERAN cell	
physCellId	PhysCellIdGERAN	Contains the Base Station Identity Code (BSIC)	
}			
cgi-Info SEQUENCE {			
cellGloballd	CellGlobalIdGERAN		
routingAreaCode	Not present		
}			
measResult SEQUENCE {			
rssi		Set according to specific test	
}			
}			

5.2.9.5 Test requirement

Tables 5.2.9.4.1-1, 5.2.9.5-1 and 5.2.9.5-2 defines the primary level settings including test tolerances for E-UTRAN TDD to GSM handover test case when the target cell is unknown.

Table 5.2.9.5-1: Cell Specific Test requirement Parameters for Cell 1 E-UTRAN TDD cell

Parameter	Unit	Cell 1		
		T1	T2	
BW _{channel}	MHz		10	
OCNG Patterns				
defined in D.2.1		OP.1 TDD	OP.2 TDD	
(OP.1 TDD) and in		01.1100	01.2 100	
D.2.2(OP.2 TDD)				
PBCH_RA	dB			
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB	0		
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA Note1	dB			
OCNG_RB Note1	dB			
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	dB		4	
$N_{oc}^{ m Note~2}$	dBm/15 kHz	-98		
\hat{E}_s/N_{oc}	dB		4	

RSRP Note 3	dBm/15 kHz	-94		
Propagation		AWGN		
Condition		AVVGIN		
Note 1: OC	NG shall be used such t	hat cell 1 is fully allocated and a constant total		
tra	nsmitted power spectral	density is achieved for all OFDM symbols.		
Note 2: Inte	erference from other cells	nce from other cells and noise sources not specified in the test is		
ass	sumed to be constant over	to be constant over subcarriers and time and shall be modelled as		
	N			
		of appropriate power for N_{oc} to be fulfilled.		
		els have been derived from other parameters for information		
pui	rposes. They are not sett	table parameters themselves.		

Table 5.2.9.5-2: Cell Specific Test requirement Parameters for Cell 2 GSM cell

Parameter	Unit	Cell	2 (GSM)
Parameter	Onit	T1	T2
Absolute RF Channel Number		AR	FCN 1
RXLEV	dBm	-Infinity	-75

The handover delay is defined as the time from the beginning of time period T2, to the moment the UE start to send access bursts on the new DCCH to Cell 2.

The handover delay T_{Handover delay} test requirement in this case is expressed as:

Handover delay $T_{Handover delay} = handover delay + T_{offset} + T_{UL}$

Handover delay = 190 ms; this is based on handover delay value as defined in Table 5.2.9.3.-1

 $T_{offset} = 4.65$ ms; GSM timing uncertainty between the time from when the UE is ready to transmit until the start of the next timeslot in GSM 26 multiframe structure

 $T_{UL} = 4.65$ ms; the time the UE has to wait in case the next timeslot is an idle frame or a SACCH frame

The handover delay $T_{Handover\ delay}$ shall be less than a total of 200 ms in this test case (note: this gives a total of 199.3 ms but the test allows 200 ms).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

5.2.10 E-UTRAN TDD - UTRAN TDD handover: unknown target cell

5.2.10.1 Test purpose

To verify the UE's ability to transfer a connection between the UE and E-UTRAN TDD to UTRAN TDD in RRC_CONNECTED state by meeting the UE RRC procedure delay and interruption time requirements when the target cell is unknown.

5.2.10.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward that support UTRA TDD.

5.2.10.3 Minimum conformance requirements

The handover delay $D_{handover}$ shall be less than maximum RRC procedure delay + $T_{interrupt}$ in RRC_CONNECTED state.

When the UE receives a RRC message implying E-UTRAN/UTRAN TDD handover the UE shall be ready to start the transmission of the new uplink DPCH or the SYNC-UL within $D_{handover}$ seconds from the end of the last TTI containing the RRC MOBILITY FROM E-UTRA command.

Where:

D_{handover} equals the RRC procedure delay, which is 50 ms plus the interruption time stated in TS 36.133 [4] section 5.3.2.2.

The interruption time is the time between the end of the last TTI containing the RRC command on the E-UTRAN PDSCH and the time the UE starts transmission on the uplink DPCH or the SYNC-UL in UTRAN TDD, excluding the RRC procedure delay. The interruption time depends on whether the target cell is known to the UE or not.

The UE shall always perform a UTRA synchronisation procedure as part of the handover procedure.

If the target cell has been measured by the UE during the last 5 seconds, the interruption time shall be less than $T_{interrupt1}$

$$T_{interrupt1} = T_{offset} + T_{UL} + 30*F_{SFN} + 20 + 10*F_{max} ms$$

If the target cell has not been measured by the UE during the last 5 seconds, the interruption time shall be less than $T_{interrupt2}$

$$T_{interrupt2} = T_{offset} + T_{UL} + 30*F_{SFN} + 180 + 10*F_{max} ms$$

Where:

 T_{offset} Equal to 10 ms, the frame timing uncertainty between the old cell and the target cell and the time that can elapse until the appearance of a Beacon channel

 T_{UL} Equal to 10 ms, the time that can elapse until the appearance of the UL timeslot in the target cell

F_{SFN} Equal to 1 if SFN decoding is required and equal to 0 otherwise

 F_{max} denotes the maximum number of radio frames within the transmission time intervals of all transport channels that are multiplexed into the same CCTrCH.

The interruption time requirements for an unknown target cell shall apply only if the signal quality of the unknown target cell is sufficient for successful synchronisation with one attempt.

The normative reference for this requirement is TS 36.133 [4] clause 5.3.2 and A.5.2.10.

5.2.10.4 Test description

5.2.10.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A, Figure A.22.
- 2. The general test parameter settings are set up according to Table 5.2.10.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are defined in clause 5.2.10.4.3.
- 5. There is one E-UTRA TDD serving cell and one UTRA TDD cell specified in the test. Cell 1 (E-UTRA TDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 5.2.10.4.1-1: General test parameters for E-UTRA TDD to unknown UTRA (1.28 Mcps TDD OPTION) handover test case

Parar	neter	Unit	Value	Comment
PDSCH parameters			DL Reference Measurement Channel R.0 TDD	As specified in section A.1.2
PCFICH/PDCC parameters	CH/PHICH		DL Reference Measurement Channel R.6 TDD	As specified in section A.2.2
Initial	Active cell		Cell 1	E-UTRAN TDD cell
conditions	Neighbour cell		Cell 2	UTRA 1.28Mcps TDD cell
Final conditions	Active cell		Cell 2	UTRA 1.28Mcps TDD cell
CP length of ce	ell 1		Normal	
Uplink-downlin of cell 1	k configuration		1	As specified in table 4.2.2 in TS 36.211[8]
Special subfrar configuration o			6	As specified in table 4.2.1 in TS 36.211[8]
Time offset bet	ween cells		3 ms	Asynchronous cells 3us or 92*Ts
Access Barring	Information		Not Sent	No additional delays in random access procedure.
TimeToTrigger		dB	0	
Filter coefficien			0	L3 filtering is not used
DRX			OFF	
T1		S	5	During T1, cell 2 shall be powered off, and during the off time the physical layer cell identity shall be changed.
T2		S	1	

5.2.10.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The test consists of two successive time periods, with time durations of T1 and T2 respectively. During time duration T1, a RRC message implying handover to UTRA 1.28Mcps TDD cell shall be sent to the UE including activation time "now". The end of the last TTI containing handover message is the beginning of T2 duration.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 2. Set the parameters according to T1 in Tables 5.2.10.5-1 and 5.2.10.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. The SS shall transmit a MobilityFromEUTRACommand message implying handover to Cell 2.
- 4. The start of T2 is the instant when the last TTI containing the RRC MobilityFromEUTRACommand message implying handover is sent to the UE, At that instant the SS shall switch the power settings from T1 to T2 as specified in Table 5.2.10.5-1. T2 starts.
- 5. If the UE transmits the UL to Cell 2 less than 280ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure testes is increased by one.
- 6. After T2 expires, the UE shall be switched off. Then ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 7. The SS shall set Cell 2 primary scrambling code = ((current cell 2 primary scrambling code -50) mod 200 + 100) for next iteration of the test procedure loop.
- 8. Repeat step 2-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.2.10.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 5.2.10.4.3-1: Common Exception messages for E-UTRA TDD to unknown UTRA TDD cell handover

Default Message Contents	
Common contents of system information	
blocks exceptions	
Default RRC messages and information	Table H.3.1-1
elements contents exceptions	Table H.3.1-7
·	Table H.3.3-1
	Table H.3.3-3

Table 5.2.10.4.3-2: MeasResults: Additional E-UTRAN TDD - UTRAN TDD handover

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultsServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListUTRA	MeasResultListUTRA		
}			
}			

Table 5.2.10.4.3-3: MeasResultListUTRA: Additional E-UTRAN TDD - UTRAN TDD handover

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId CHOICE {			
tdd	PhysCellIdUTRA-TDD		
}			
cgi-Info SEQUENCE {			
cellGloballd	CellGloballdUTRA		
IcoatonAreaCode	Not present		
routingAreaCode	Not present		
plmn-IdentityList	Not present		
}			
measResult SEQUENCE {			
utra-RSCP		Set according to	
		specific test	
utra-EcN0		Set according to	
		specific test	
}			
}			

Table 5.2.10.4.3-4: PhysCellIdentityUTRA-TDD: Additional E-UTRAN TDD - UTRAN TDD handover

Derivation Path: 36.331 clause 6.3.4			
Information Element	Value/remark	Comment	Condition
PhysCellIdUTRA-TDD ::= SEQUENCE {	12	This is the typical	
		value range used in	
		UTRAN TDD tests.	

Table 5.2.10.4.3-5: HANDOVER TO UTRAN COMMAND

Information Element	Value/remark
Downlink information common for all radio links	
 Downlink DPCH info common for all RL 	
- Timing indicator	Initialize
- Default DPCH Offset Value	0 Integer (07)

5.2.10.5 Test requirement

Tables 5.2.10.4.1-1, 5.2.10.5-1 and 5.2.10.5-2 define the primary level settings including test tolerances for E-UTRAN TDD to unknown UTRAN TDD cell handover test.

Table 5.2.10.5-1: Cell Specific Test requirement Parameters for E-UTRAN TDD to unknown UTRAN TDD cell handover test case (cell1)

Parameter	Unit	Cell 1		
		T1	T2	
E-UTRA RF Channel		,	1	
Number				
BWchannel	MHz		0	
OCNG Patterns defined in		OP.1 TDD	OP.2 TDD	
D.2.1 (OP.1 TDD) and in				
D.2.2(OP.2 TDD)				
PBCH_RA	dB			
PBCH_RB	dB			
PSS_RB	dB			
SSS_RB	dB			
PCFICH_PA	dB			
PHICH_PA	dB			
PHICH_PB	dB	0	0	
PDCCH_PA	dB			
PDCCH_PB	dB			
PDSCH_PA	dB			
PDSCH_PB	dB			
OCNG_RANote 1	dB			
OCNG_RBNote 1	dB			
\hat{E}_s/I_{ot}	dB	3	3	
\hat{E}_s/N_{oc}	dB	3	3	
N_{oc}	dBm/15kHz	-(98	
RSRP	dBm/15kHz	-95	-95	
SCH_RP	dBm/15 kHz	-95	-95	
Propagation Condition		AWGN		
 Note 1: OCNG shall be used such that cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. 				

Table 5.2.10.5-2: Cell Specific Test requirement Parameters for Cell 2 UTRAN TDD cell

Pa	rameter	Unit	Cell 2 (UTRA)			
Timeslot	Number		0		DwF	PTS
			T1	T2	T1	T2
UTRA RE Number ^N	- Channel		Channel 2			
PCCPCF	H_Ec/lor	dB	-:	3		
DwPCH_	_Ec/lor	dB			C)
OCNS_E	c/lor	dB	-3			
\hat{I}_{or}/I_{oc}		dB	-infinity	13	-infinity	13
I_{oc}		dBm/1.28 MHz	-80			
PCCPCF	I RSCP	dBm	-infinity	-70	n.	a.
Propagat	tion Condition			AW	'GN	
Note1:	te1: In the case of multi-frequency cell, the UTRA RF Channel Number is the					r is the
primary frequency's channel number. Note2: P-CCPCH RSCP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

The handover delay is defined as the time from the beginning of time period T2, to the moment the UE start to transmit SYNCH-UL sequence in the UpPTS to Cell 2.

The handover delay D_{handover} test requirement in this case is expressed as:

 $D_{handover} = maximum RRC procedure delay + T_{interrupt}$

$$T_{interrupt2} = T_{offset} + T_{UL} + 30*F_{SFN} + 180 + 10*F_{max} ms$$

 $T_{\text{offse t}} = 10 \text{ ms}$; The frame timing uncertainty between the old cell and the target cell and the time that can elapse until the appearance of a Beacon channel

 $T_{\text{UL}} = 10 \text{ ms}$; The time that can elapse until the appearance of the UL timeslot in the target cell

 $F_{SFN} = 1$; Equal to 1 if SFN decoding is required and equal to 0 otherwise.

 $F_{max} = 0$; The maximum number of radio frames within the transmission time intervals of all transport channels that are multiplexed into the same CCTrCH.

Maximum RRC procedure delay = 50 ms as defined in TS 36.133

The handover delay D_{handover} shall be less than a total of 280 ms in this test case.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

5.3 Handover from E-UTRAN to non-3GPP RATs

5.3.1 E-UTRAN FDD - HRPD handover

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The Mobility From EUTRA Command message parameters are undefined
- InterRAT-Target and InterRAT-Message field description is FFS
- The Message contents are undefined
- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined

5.3.1.1 Test purpose

To verify the UE's ability to transfer a connection between the UE and E-UTRAN to HRPD in RRC_CONNECTED state by meeting the UE RRC procedure delay and interruption time requirements.

5.3.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward that support HRPD.

5.3.1.3 Minimum conformance requirements

The handover delay $D_{handover}$ shall be less than maximum RRC procedure delay (which is 50 ms) + $T_{interrupt}$ in RRC_CONNECTED state.

When the UE receives a RRC message implying handover to HRPD, the UE shall be ready to start the transmission of the new reverse control channel in HRPD within $D_{handover}$ from the end of the last E-UTRAN TTI containing the RRC command.

The interruption time is the time between the end of the last TTI containing the RRC command on the E-UTRAN PDSCH and the time the UE starts transmission of the reverse control channel in HRPD, excluding the RRC procedure delay. The interruption time depends on whether the target cell is known to the UE or not.

An HRPD cell is known if it has been measured by the UE during the last 5 seconds otherwise it is unknown. Under the reference conditions specified in sub-clause 6.6 of [17], the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{IU} + [40] + [10]*KC*SW_K + [10]*OC*SW_O ms$$

Where:

 T_{IU} It is the interruption uncertainty when changing the timing from the E-UTRAN to the new HRPD cell. T_{IU} can be up to one HRPD frame (26.66 ms).

$$SW_K$$
 is $SW_K = \left\lceil \frac{srch_win_k}{60} \right\rceil$ where $srch_win_k$ is the number of HRPD chips indicated by the

search window for known target HRPD cells in the message

SW_o is SW_o =
$$\left[\frac{\text{srch_win_o}}{60}\right]$$
 where srch_win_o is the number of HRPD chips indicated by the

search window for unknown target HRPD cells in the message

KC It is the number of known target HRPD cells in the message, and

OC It is the number of unknown target HRPD cells in the message.

Note: An additional delay in the interruption time may occur due to the reverse link silence interval [18], which is specific to HRPD.

The normative reference for this requirement is TS 36.133 [4] clause 5.4.1 and A.5.3.1.

5.3.1.4 Test description

5.3.1.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A, Figure A.22.
- 2. The general test parameter settings are set up according to Table 5.3.1.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are defined in clause 5.3.1.4.3.
- 5. There is one E-UTRA FDD serving cell and one HRPD cell specified in the test. Cell 1 (E-UTRA FDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 5.3.1.4.1-1: General test parameters for E-UTRAN FDD to HRPD handover test case

Para	ameter	Unit	Value	Comment
PDSCH parameters	S		DL Reference Measurement Channel R.0 FDD	As specified in section A.1.1
PCFICH/PDCCH/P			DL Reference Measurement Channel R.6 FDD	As specified in section A.2.1
Initial conditions	Active cell		Cell 1	E-UTRAN FDD cell
	Neighbouring cell		Cell 2	HRPD cell
Final condition	Active cell		Cell 2	HRPD cell
Channel Bandwidth	n (BW _{channel})	MHz	10	
Gap Pattern Id			0	As specified in TS 36.133 [4] Table 8.1.2.1-1 started before T2 starts
E-UTRAN FDD me	asurement quantity		RSRP	
Inter-RAT (HRPD) quantity	measurement		CDMA2000 HRPD Pilot Strength	
b2-Threshold1		dBm	-90	Absolute E-UTRAN RSRP threshold for event B2
b2-Threshold2-CDI	MA2000	dB	-7	Absolute 'CDMA2000 HRPD Pilot Strength' threshold for event B2
Hysteresis		dB	0	
TimeToTrigger		dB	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Non-DRX test
Access Barring Info	ormation	-	Not sent	No additional delays in random access procedure
E-UTRA RF Chann	el Number		1	One E-UTRA FDD carrier frequency is used.
E-UTRA Channel E (BWchannel)	Bandwidth	MHz	10	
HRPD RF Channel	Number		1	One HRPD carrier frequency is used.
HRPD neighbour co	ell list size		8	HRPD cells on HRPD RF channel 1 provided in the cell list before T2.
cdma2000-Search\	VindowSize		8 (60 PN chips)	Search window size as defined in section 6.3.5 in 3GPP TS 36.331 [5]
T1		S	5	
T2		s	≤10	
T3		S	1	

5.3.1.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. The RRC message implying handover shall be sent to the UE during T2, after the UE has reported Event B2. T3 is defined as the end of the last E-UTRAN TTI containing the RRC message implying handover.

1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.

- 2. Set the parameters according to T1 in Table's 5.3.1.5-1 and 5.3.1.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. The neighbour cell shall broadcast its own PN offset and the measurement cell list of Cell 1 shall contain the PN offset of Cell 2. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table's 5.3.1.5-1 and 5.3.1.5-2.
- 6. UE shall transmit a MeasurementReport message triggered by Event B2.
- 7. SS shall transmit a MobilityFromEUTRACommand message implying handover to Cell 2.
- 8. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T2 to T3 as specified in Tables 5.3.1.5-1 and 5.3.1.5-2.
- 9. If the UE starts to transmit the Reverse Control Channel to Cell 2 in less than 127 ms from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure testes is increased by one.
- 10. After T3 expires, the UE shall be switched off. Then ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 11. The SS shall set a different PN Offset on Cell 2 so that the previous timing information of Cell 2 is invalid in the UE for the next iteration of the test procedure loop.
- 12. Repeat steps 2-11 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.3.1.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions.

Table 5.3.1.4.3-1: Common Exception messages for E-UTRAN FDD - HRPD handover

Default Message Contents	
Common contents of system information	
blocks exceptions	
Default RRC messages and information	Table H.3.1-1
elements contents exceptions	Table H.3.1-7
	Table H.3.1-8
	Table H.3.3-3
	Table H.3.3-4

Table 5.3.1.4.3-2: SystemInformationBlockType8: Additional E-UTRAN FDD - HRPD handover

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-7 SystemInformationBlockType8				
Information Element	Value/remark	Comment	Condition	
cellReselectionParametersHRPD SEQUENCE {				
bandClassList SEQUENCE (SIZE (1maxCDMA	1 entry			
-BandClass)) OF SEQUENCE {	·			
threshX-High	60(-30)	INTEGER (063)		
threshX-Low	63(-32)	INTEGER (063)		
}				

Table 5.3.1.4.3-3: ReportConfigInterRAT-B2-CDMA2000: Additional E-UTRAN FDD - HRPD handover

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6	-7C ReportConfigInterRAT	-B2-CDMA2000(EUTR	A-Thres,
CDMA2000-Thres)			
Information Element	Value/remark	Comment	Condition
ReportConfigInterRAT-B2-CDMA2000(EUTRA-Thres,			
CDMA2000-Thres) ::= SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventB2 SEQUENCE {			
b2-Threshold1 CHOICE {			
threshold-RSRP	50(-90 dBm)	-90 dBm EUTRA- Thres is actual threshold value in dBm (50 - 140 dBm)	
}			
b2-Threshold2 CHOICE {			
b2-Threshold2CDMA2000	[14 (-7 dB)]	Integer (063)	
}			
}			
}			
hysteresis	0		
timeToTrigger	ms0		
}			
}			
maxReportCells	8		
reportInterval	ms2048		
reportAmount	r1		
}			

Table 5.3.1.4.3-4: MeasuredResults: Additional E-UTRAN FDD - HRPD handover

Information Element	Value/remark	Comment	Condition
MeasuredResults ::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultsServing			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
neighbouringMeasResults CHOICE {			
measResultsCDMA2000 }	MeasResultsCDMA2000		

Table 5.3.1.4.3-5: MeasResultListCDMA2000: Additional E-UTRAN FDD - HRPD handover

Derivation Path: 36.331 clause 6.3.5 Information Element	Value/remark	Comment	Condition
MeasResultsCDMA2000 ::= SEQUENCE (SIZE	Tuluo/Tulia. N	Commone	Containon
(1maxCellReport)) OF SEQUENCE {			
physCellId	PhysCellIdCDMA2000		
cgi-Info	CellGlobalIdCDMA2000		
measResult SEQUENCE {			
pilotPnPhase		Set according to specific test	
pilotStrength		Set according to specific test	
}			
}			

Table 5.3.1.4.3-6: PhysCellIdentityCDMA2000-FDD: Additional E-UTRAN FDD - HRPD handover

Derivation Path: 36.331 clause 6.3.4			
Information Element	Value/remark	Comment	Condition
PhysCellIdCDMA2000		See 36.508 Table 4.4.2-3	

5.3.1.5 Test requirement

Tables 5.3.1.4.1-1, 5.3.1.5-1 and 5.3.1.5-2 define the primary level settings including test tolerances for E-UTRAN FDD - HRPD handover test.

Table 5.3.1.5-1: Cell Specific Test requirement Parameters for Cell 1 E-UTRAN FDD cell

Parameter	Unit	Cell 1 (E-UTRA)		
		T1	T2	T3
E-UTRA RF Channel			1	
number				
BW _{channel}	MHz		10	
OCNG Patterns defined in		OP.1	OP.1	OP.2
D.1.1 (OP.1 FDD) and in		FDD	FDD	FDD
D.1.2 (OP.2 FDD)				
PBCH_RA	dB			
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB		0	
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB]		
OCNG_RA ^{Note 1}	dB]		
OCNG_RB ^{Note 1}	dB			

N_{oc} Note		dBm/15 kHz	-98 (AWGN)		
RSRP Note 3		dBm/15	-98 + TT -98 + TT		-98 + TT
		KHz			
\hat{E}_s/N_{oc}		dB	0 + TT		0 +TT
\hat{E}_s/I_{ot}		dB	0 + TT		0 + TT
Propagat	ion Condition		AWGN		
Note 1:	OCNG shall be us	ed such that	cell 1 is fully	allocated and	la
	constant total tran OFDM symbols.	smitted powe	r spectral de	nsity is achie	ved for all
Note 2:	,	n other cells and noise sources not specified in the			
	test is assumed to	be constant	over subcarri	ers and time	and shall
N o	be modelled as A\	WGN of appro	opriate power	for N_{oc} to b	oe fulfilled.
Note 3:	RSRP levels have information purpos				

Table 5.3.1.5-2: Cell Specific Test requirement Parameters for Cell 2 HRPD cell

Parameter	Unit	Cell 2 (HRPD)		
		T1	T2	T3
$\frac{\text{Control} \text{E}_{\text{b}}}{\text{N}_{\text{t}}} \text{(38.4 kbps)}$	dB		21	
$\frac{\text{Control} \text{E}_{\text{b}}}{\text{N}_{\text{t}}} $ (76.8 kbps)	dB		18	
\hat{I}_{or}/I_{oc}	dB	-infinity	0 + TT	0 + TT
I_{oc}	dBm/1.2288 MHz		-55	
CDMA2000 HRPD Pilot Strength	dB	-infinity	-3 + TT	-3 + TT
Propagation Condition			AWGN	

The handover delay is defined as the time from the beginning of time period T3, to the moment the UE start to transmit the reverse control channel in HRPD to Cell 2.

The handover delay $D_{handover}$ test requirement in this case is expressed as:

Handover delay $D_{handover} = maximum RRC procedure delay + T_{interrupt}$

$$T_{interrupt} = T_{IU} + [40] + [10]*KC*SW_K + [10]*OC*SW_O ms$$

 $T_{IU} = 26.66$ ms; T_{IU} can be up to one HRPD frame (26.66 ms).

$$SW_K = 1$$
; $SW_K = \left\lceil \frac{srch_win_k}{60} \right\rceil$ where $srch_win_k$ is the number of HRPD chips (60) indicated by the search

window for known target HRPD cells in the message

KC = 1; 1 known cell; HRPD cell is identified during T2 and is therefore known before T3

OC = 0; OC is the number of unknown target HRPD cells (0).

Maximum RRC procedure delay = 50 ms as defined in TS 36.133 [4].

The handover delay $D_{handover}$ shall be less than a total of 127 ms in this test case (note: this gives a total of 50 ms for maximum RRC procedure delay plus 76.66 ms for Tinterrupt - allow 127 ms in the test).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

5.3.2 E-UTRAN FDD - cdma2000 1xRTT handover

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The Mobility From EUTRA Command message parameters are undefined
- InterRAT-Target and InterRAT-Message field description is FFS
- The Message contents are undefined
- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined

5.3.2.1 Test purpose

To verify the UE's ability to transfer a connection between the UE and E-UTRAN to cdma2000 1xRTT in RRC_CONNECTED state by meeting the UE RRC procedure delay and interruption time requirements.

5.3.2.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward that support cdma2000 1xRTT.

5.3.2.3 Minimum conformance requirements

The handover delay $D_{handover}$ shall be less than maximum RRC procedure delay (which is 130 ms) + $T_{interrupt}$ in RRC_CONNECTED state.

When the UE receives a RRC message implying handover to cdma2000 1xRTT, the UE shall be ready to start the transmission of the new reverse control channel in cdma2000 1xRTT within $D_{handover}$ from the end of the last E-UTRAN TTI containing the RRC command.

The interruption time is the time between the end of the last TTI containing the RRC command on the E-UTRAN PDSCH and the time the UE starts transmission of the reverse control channel in cdma2000 1xRTT, excluding the RRC procedure delay. The interruption time depends on whether the target cell is known to the UE or not.

A cdma2000 1xRTT cell is known if it has been measured by the UE during the last 5 seconds otherwise it is unknown. Under the reference conditions specified in sub-clause 4.2.1 of [19], the interruption time shall be less than $T_{interrupt}$:

$$T_{interrupt} = T_{IU} + [40] + [10]*KC*SW_K + [10]*OC*SW_O ms$$

Where:

 T_{IU} It is the interruption uncertainty when changing the timing from the E-UTRAN to the new cdma2000 1xRTT cell. T_{IU} can be up to one cdma2000 1xRTT frame (20 ms).

 SW_K is $SW_K = \left\lceil \frac{srch_win_k}{60} \right\rceil$ where $srch_win_k$ is the number of cdma2000 1xRTT chips indicated

by the search window for known target cdma2000 1xRTT cells in the message

SW_o is SW_o = $\left[\frac{\text{srch_win_o}}{60}\right]$ where srch_win_o is the number of cdma2000 1xRTT chips indicated

by the search window for unknown target cdma2000 1xRTT cells in the message

KC It is the number of known target cdma2000 1xRTT cells in the message, and

OC It is the number of unknown target cdma2000 1xRTT cells in the message.

The normative reference for this requirement is TS 36.133 [4] clause 5.4.2 and A.5.3.2.

5.3.2.4 Test description

5.3.2.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A, Figure A.22.
- 2. The general test parameter settings are set up according to Table 5.3.2.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are defined in clause 5.3.2.4.3.
- 5. There is one E-UTRA FDD serving cell and one cdma2000 1xRTT cell specified in the test. Cell 1 (E-UTRA FDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 5.3.2.4.1-1: General test parameters for E-UTRAN FDD to cdma2000 1xRTT handover test case

Para	meter	Unit	Value	Comment
PDSCH parameters	3		DL Reference Measurement Channel R.0 FDD	As specified in section A.1.1
PCFICH/PDCCH/PI	HICH parameters		DL Reference Measurement Channel R.6 FDD	As specified in section A.2.1
	Active cell		Cell 1	E-UTRAN FDD cell
	Neighbouring cell		Cell 2	cdma2000 1X cell
Final condition	Active cell		Cell 2	cdma2000 1X cell
Channel Bandwidth	(BW _{channel})	MHz	10	
Gap Pattern Id			0	As specified in TS 36.133 [4] Table 8.1.2.1-1 started before T2 starts
E-UTRAN FDD mea	asurement quantity		RSRP	
Inter-RAT (cdma200 quantity	00 1X) measurement		CDMA2000 1xRTT Pilot Strength	
b2-Threshold1		dBm	-90	Absolute E-UTRAN RSRP threshold for event B2
b2-Threshold2-CDM	//A2000	dB	-14	Absolute 'CDMA2000 1xRTT Pilot Strength' threshold for event B2
Hysteresis		dB	0	
TimeToTrigger		dB	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Non-DRX test
Access Barring Info	rmation	-	Not sent	No additional delays in random access procedure
E-UTRA RF Channe	el Number		1	One E-UTRA FDD carrier frequency is used.
E-UTRA Channel B (BWchannel)	andwidth	MHz	10	
cdma2000 1X RF C	hannel Number		1	One HRPD carrier frequency is used.
cdma2000 1X neigh	bour cell list size		8	cdma2000 1X cells on cdma2000 1X RF channel 1 provided in the cell list before T2.
cdma2000-SearchV	VindowSize		8 (60 PN chips)	Search window size as defined in section 6.3.5 in 3GPP TS 36.331 [5]
T1		S	5	
T2		S	≤10	
T3		S	1	

5.3.2.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. The RRC message implying handover shall be sent to the UE during T2, after the UE has reported Event B2. T3 is defined as the end of the last E-UTRAN TTI containing the RRC message implying handover.

- 1. Ensure the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 2. Set the parameters according to T1 in Table's 5.3.2.5-1 and 5.3.2.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. The neighbour cell shall broadcast its own PN offset and the measurement cell list of Cell 1 shall contain the PN offset of Cell 2. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table's 5.3.2.5-1 and 5.3.2.5-2.
- 6. UE shall transmit a MeasurementReport message triggered by Event B2.
- 7. SS shall transmit a MobilityFromEUTRACommand message implying handover to Cell 2.
- 8. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T2 to T3 as specified in Tables 5.3.2.5-1 and 5.3.2.5-2.
- 9. If the UE starts to transmit the Reverse Control Channel to Cell 2 in less than 200 ms from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure testes is increased by one.
- 10. After T3 expires, the UE shall be switched off. Then ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 11. The SS shall set a different PN Offset on Cell 2 so that the previous timing information of Cell 2 is invalid in the UE for the next iteration of the test procedure loop.
- 12. Repeat steps 2-11 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.3.2.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions [FFS]

5.3.2.5 Test requirement

Tables 5.3.2.4.1-1, 5.3.2.5-1 and 5.3.2.5-2 define the primary level settings including test tolerances for E-UTRAN FDD - cdma2000 1xRTT handover test.

Table 5.3.2.5-1: Cell Specific Test requirement Parameters for Cell 1 E-UTRAN FDD cell

Parameter	Unit	С	ell 1 (E-UTR	A)		
		T1	T2	T3		
E-UTRA RF Channel			1			
number						
BW _{channel}	MHz		10			
OCNG Patterns defined in		OP.1	OP.1	OP.2		
D.1.1 (OP.1 FDD) and in		FDD	FDD	FDD		
D.1.2 (OP.2 FDD)						
PBCH_RA	dB					
PBCH_RB	dB					
PSS_RA	dB					
SSS_RA	dB					
PCFICH_RB	dB					
PHICH_RA	dB					
PHICH_RB	dB		0			
PDCCH_RA	dB					
PDCCH_RB	dB					
PDSCH_RA	dB					
PDSCH_RB	dB					
OCNG_RA ^{Note 1}	dB					
OCNG_RB ^{Note 1}	dB					
$N_{oc}^{ m Note~2}$	dBm/15		-98 (AWGN)			
	kHz					
RSRP Note 3	dBm/15	-98 + TT	-98 + TT	-98 + TT		
	KHz	0 . TT	0 . TT	0.77		
\hat{E}_s/N_{oc}	dB	0 + TT	0 + TT	0 +TT		
\hat{E}_s/I_{ot}	dB	0 + TT	0 + TT	0 + TT		
Propagation Condition			AWGN			
Note 1: OCNG shall be us	sed such that	cell 1 is fully	allocated and	l a		
	nsmitted power spectral density is achieved for all					
OFDM symbols.						
test is assumed to	be constant	onstant over subcarriers and time and shall				
	be modelled as AWGN of appropriate power for $^{N_{\it oc}}$ to be fulfilled.					
be modelled as A	wGN of appro	opriate power	tor oc to l	oe tultilled.		
Note 3: RSRP levels have						
information purpo	ses. They are	not settable	parameters t	nemselves.		

Table 5.3.2.5-2: Cell Specific Test requirement Parameters for Cell 2 cdma2000 1xRTT cell

Parameter	Unit	Cell 2 (cdma2000 1X)			
		T1	T2	T3	
$\frac{\text{Pilot} \text{E}_{\text{c}}}{\text{I}_{\text{or}}}$	dB	-7			
$\frac{\text{Sync} \text{E}_{\text{c}}}{\text{I}_{\text{or}}}$	dB	-16			
$\frac{\text{Paging} \text{E}_{\text{c}}}{\text{I}_{\text{or}}} \text{(4.8 kbps)}$	dB		-12		
\hat{I}_{or}/I_{oc}	dB	-infinity 0 + TT 0 +		0 + TT	
I_{oc}	dBm/1.2288 MHz		-55		
CDMA2000 1xRTT Pilot Strength	dB	-infinity -10 + TT -10 +		-10 + TT	
Propagation Condition			AWGN		

The handover delay is defined as the time from the beginning of time period T3, to the moment the UE start to transmit the reverse control channel in $cdma2000\ 1xRTT$ to $Cell\ 2$.

The handover delay D_{handover} test requirement in this case is expressed as:

Handover delay $D_{handover} = maximum RRC$ procedure delay $+ T_{interrupt}$

$$T_{interrupt} = T_{IU} + [40] + [10]*KC*SW_K + [10]*OC*SW_O ms$$

 $T_{IIJ} = 20 \text{ ms}$; T_{IIJ} can be up to one cdma2000 1xRTT frame (20 ms).

$$SW_K = 1$$
; $SW_K = \left[\frac{srch_win_k}{60}\right]$ where $srch_win_k$ is the number of cdma2000 1xRTT chips (60) indicated by

the search window for known target cdma2000 1xRTT cells in the message

KC = 1; 1 known cell; cdma2000 1xRTT cell is identified during T2 and is therefore known before T3

OC = 0; OC is the number of unknown target cdma2000 1xRTT cells (0).

Maximum RRC procedure delay = 130 ms as defined in TS 36.133 [4].

The handover delay $D_{handover}$ shall be less than a total of 200 ms in this test case (note: this gives a total of 130 ms for maximum RRC procedure delay plus 70 ms for Tinterrupt).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

5.3.3 E-UTRAN FDD - HRPD handover: unknown target cell

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The MobilityFromEUTRACommand message parameters are undefined
- targetRAT-Type and targetRAT-MessageContainer field descriptions are FFS
- The Message contents are undefined
- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined

5.3.3.1 Test purpose

To verify the UE's ability to transfer a connection between the UE and E-UTRAN to HRPD handover: unknown target cell in RRC_CONNECTED state by meeting the handover to an unknown target cell delay requirements.

5.3.3.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward that support HRPD.

5.3.3.3 Minimum conformance requirements

The handover delay $D_{handover}$ shall be less than maximum RRC procedure delay (which is 50 ms) + $T_{interrupt}$ in RRC_CONNECTED state.

When the UE receives a RRC message implying handover to HRPD, the UE shall be ready to start the transmission of the new reverse control channel in HRPD within D_{handover} from the end of the last E-UTRAN TTI containing the RRC command.

The interruption time is the time between the end of the last TTI containing the RRC command on the E-UTRAN PDSCH and the time the UE starts transmission of the reverse control channel in HRPD, excluding the RRC procedure delay. The interruption time depends on whether the target cell is known to the UE or not.

An HRPD cell is known if it has been measured by the UE during the last 5 seconds otherwise it is unknown. Under the reference conditions specified in sub-clause 6.6 of [17], the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{IU} + [40] + [10]*KC*SW_K + [10]*OC*SW_O ms$$

Where:

 T_{IU} It is the interruption uncertainty when changing the timing from the E-UTRAN to the new HRPD cell. T_{IU} can be up to one HRPD frame (26.66 ms).

$$SW_K$$
 is $SW_K = \left\lceil \frac{srch_win_k}{60} \right\rceil$ where $srch_win_k$ is the number of HRPD chips indicated by the

search window for known target HRPD cells in the message

$$SW_O$$
 is $SW_O = \left\lceil \frac{srch_win_o}{60} \right\rceil$ where $srch_win_o$ is the number of HRPD chips indicated by the

search window for unknown target HRPD cells in the message

KC It is the number of known target HRPD cells in the message, and

OC It is the number of unknown target HRPD cells in the message.

NOTE: An additional delay in the interruption time may occur due to the reverse link silence interval [18], which is specific to HRPD.

The normative reference for this requirement is TS 36.133 [4] clause 5.4.1 and A.5.3.3.

5.3.3.4 Test description

5.3.3.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A, Figure A.22.
- 2. The general test parameter settings are set up according to Table 5.3.3.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are defined in clause 5.3.3.4.3.
- 5. There is one E-UTRA FDD serving cell and one HRPD cell specified in the test. Cell 1 (E-UTRA FDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 5.3.3.4.1-1: General test parameters for E-UTRAN FDD to HRPD handover: unknown target cell test case

Para	ameter	Unit	Value	Comment
PDSCH parameters			DL Reference Measurement Channel R.0 FDD	As specified in section A.1.1
PCFICH/PDCCH/F	PHICH parameters		DL Reference Measurement Channel R.6 FDD	As specified in section A.2.1
Initial conditions	Active cell		Cell 1	E-UTRAN FDD cell
	Neighbouring cell		Cell 2	HRPD cell
Final condition	Active cell		Cell 2	HRPD cell
Channel Bandwidtl	n (BW _{channel})	MHz	10	
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
E-UTRA RF Chanr	nel Number		1	One E-UTRA FDD carrier frequency is used.
E-UTRA Channel E (BWchannel)	Bandwidth	MHz	10	
HRPD RF Channe	l Number		1	One HRPD carrier frequency is used.
cdma2000-SearchWindowSize			8 (60 PN chips)	Search window size as defined in section 6.3.5 in 3GPP TS 36.331
T1		S	≤5	
T2		S	1	

5.3.3.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. A RRC message implying handover shall be sent to the UE during period T1. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. Starting at T2, Cell 2 becomes detectable and the UE receives a RRC handover command from the network.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 2. Set the parameters according to T1 in Table's 5.3.3.5-1 and 5.3.3.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. The SS shall transmit the message containing Information Element systemTimeInfo as defined in TS 36.331 [5] clause 6.3.1. The neighbour cell shall broadcast its own PN offset. The SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. The SS shall transmit a MobilityFromEUTRACommand message implying handover to Cell 2.
- 6. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T1 to T2 as specified in Table's 5.3.3.5-1 and 5.3.3.5-2.
- 7. If the UE starts to transmit the Reverse Control Channel to Cell 2 in less than 127 ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure testes is increased by one.
- 8. After T2 expires, the UE shall be switched off. Then ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 9. The SS shall set a different PN Offset on Cell 2 so that the previous timing information of Cell 2 is invalid in the UE for the next iteration of the test procedure loop.
- 10. Repeat steps 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.3.3.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions [FFS]

5.3.3.5 Test requirement

Tables 5.3.3.4.1-1, 5.3.3.5-1 and 5.3.3.5-2 define the primary level settings including test tolerances for E-UTRAN FDD - HRPD handover: unknown target cell test.

Table 5.3.3.5-1: Cell Specific Test requirement Parameters for Cell 1 E-UTRAN FDD to HRPD handover: unknown target cell test case

Parameter	Unit	Cell 1 (E-UTRAN FDD)		
		T1	T2	
E-UTRA RF Channel			1	
number				
BW _{channel}	MHz	1	0	
OCNG Patterns defined in		OP.1	FDD	
D.1.1 (OP.1 FDD)				
PBCH_RA	dB			
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB		0	
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA Note 1	dB			
OCNG_RB Note 1	dB			
N _{oc} Note 2	dBm/15 kHz	-9	98	
RSRP Note 3	dBm/15 kHz	-98 + TT	-98 + TT	
\hat{E}_s/N_{oc}	dB	0 + TT	0 + TT	
\hat{E}_s/I_{ot}	dB	0 + TT	0 + TT	
Propagation Condition		AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 5.3.3.5-2: Cell Specific Test requirement Parameters for Cell 2 E-UTRAN FDD to HRPD handover: unknown target cell test case

Parameter	Unit	Cell	2 (HRPD)
		T1	T2
$\frac{\text{Control} \text{E}_{\text{b}}}{\text{N}_{\text{t}}} \text{(38.4 kbps)}$	dB		21
$\frac{\text{Control} \text{E}_{\text{b}}}{\text{N}_{\text{t}}} \text{(76.8 kbps)}$	dB		18
\hat{I}_{or}/I_{oc}	dB	-infinity	0 + TT
I_{oc}	dBm/1.2288 MHz		-55
CDMA2000 HRPD Pilot Strength	dB	-infinity	-3 + TT
Propagation Condition			AWGN

The handover to an unknown target cell delay is defined as the time from the beginning of time period T2, to the moment the UE start to transmit the reverse control channel in HRPD to Cell 2.

The handover delay $D_{handover}$ test requirement in this case is expressed as:

 $Handover \ delay \ D_{handover} = maximum \ RRC \ procedure \ delay + T_{interrupt}$

$$T_{interrupt} = T_{IU} + [40] + [10]*KC*SW_K + [10]*OC*SW_O ms$$

 $T_{IU} = 26.66$ ms; T_{IU} can be up to one HRPD frame (26.66 ms).

$$SW_O = 1$$
; $SW_O = \left[\frac{srch_win_o}{60} \right]$ where $srch_win_o$ is the number of HRPD chips (60) indicated by the search

window for unknown target HRPD cells in the message

KC = 0; KC is the number of known target HRPD cells (0).

OC = 1; OC is the number of unknown target HRPD cells (1).

Maximum RRC procedure delay = 50 ms as defined in TS 36.133 [4].

The handover delay $D_{handover}$ shall be less than a total of 127 ms in this test case (note: this gives a total of 50 ms for maximum RRC procedure delay plus 76.66 ms for Tinterrupt - allow 127 ms in the test).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

5.3.4 E-UTRAN FDD - cdma2000 1xRTT handover: unknown target cell

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The Mobility From EUTRA Command message parameters are undefined
- targetRAT-Type and targetRAT-MessageContainer field descriptions are FFS
- The Message contents are undefined
- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined

5.3.4.1 Test purpose

To verify the UE's ability to transfer a connection between the UE and E-UTRAN to cdma2000 1xRTT handover: unknown target cell in RRC_CONNECTED state by meeting the handover to an unknown target cell delay requirements.

5.3.4.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward that support cdma2000 1xRTT.

5.3.4.3 Minimum conformance requirements

The handover delay $D_{handover}$ shall be less than maximum RRC procedure delay (which is 130 ms) + $T_{interrupt}$ in RRC CONNECTED state.

When the UE receives a RRC message implying handover to cdma2000 1xRTT, the UE shall be ready to start the transmission of the new reverse control channel in cdma2000 1xRTT within $D_{handover}$ from the end of the last E-UTRAN TTI containing the RRC command.

The interruption time is the time between the end of the last TTI containing the RRC command on the E-UTRAN PDSCH and the time the UE starts transmission of the reverse control channel in cdma2000 1xRTT, excluding the RRC procedure delay. The interruption time depends on whether the target cell is known to the UE or not.

A cdma2000 1xRTT cell is known if it has been measured by the UE during the last 5 seconds otherwise it is unknown. Under the reference conditions specified in sub-clause 4.2.1 of [19], the interruption time shall be less than T_{interrupt}:

$$T_{interrupt} = T_{IU} + [40] + [10]*KC*SW_K + [10]*OC*SW_O ms$$

Where:

 T_{IU} It is the interruption uncertainty when changing the timing from the E-UTRAN to the new cdma2000 1xRTT cell. T_{IU} can be up to one cdma2000 1xRTT frame (20 ms).

$$SW_{K} \hspace{1cm} \text{is} \hspace{1cm} SW_{K} = \left \lceil \frac{srch_win_k}{60} \right \rceil \hspace{1cm} \text{where srch_win_k is the number of cdma2000 1xRTT chips indicated}$$

by the search window for known target cdma2000 1xRTT cells in the message

$$SW_O$$
 is $SW_O = \left[\frac{srch_win_o}{60} \right]$ where $srch_win_o$ is the number of cdma2000 1xRTT chips indicated

by the search window for unknown target cdma2000 1xRTT cells in the message

KC It is the number of known target cdma2000 1xRTT cells in the message, and

OC It is the number of unknown target cdma2000 1xRTT cells in the message.

The normative reference for this requirement is TS 36.133 [4] clause 5.4.2 and A.5.3.4.

5.3.4.4 Test description

5.3.4.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A, Figure A.22.
- 2. The general test parameter settings are set up according to Table 5.3.4.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are defined in clause 5.3.4.4.3.

5. There is one E-UTRA FDD serving cell and one cdma2000 1xRTT cell specified in the test. Cell 1 (E-UTRA FDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 5.3.4.4.1-1: General test parameters for E-UTRAN FDD to cdma2000 1xRTT handover: unknown target cell test case

Parameter		Unit	Value	Comment
PDSCH parameters			DL Reference Measurement Channel R.0 FDD	As specified in section A.1.1
PCFICH/PDCCH/F	PHICH parameters		DL Reference Measurement Channel R.6 FDD	As specified in section A.2.1
Initial conditions	Active cell		Cell 1	E-UTRAN FDD cell
	Neighbouring cell		Cell 2	cdma2000 1X cell
Final condition	Active cell		Cell 2	cdma2000 1X cell
Channel Bandwidtl	h (BW _{channel})	MHz	10	
DRX			OFF	Non-DRX test
Access Barring Info	ormation	-	Not sent	No additional delays in random
_				access procedure
E-UTRA RF Chann	nel Number		1	One E-UTRA FDD carrier
				frequency is used.
E-UTRA Channel (BWchannel)	Bandwidth	MHz	10	
cdma2000 1X RF Channel Number			1	One HRPD carrier frequency is used.
cdma2000-SearchWindowSize			8 (60 PN chips)	Search window size as defined in section 6.3.5 in 3GPP TS 36.331
T1		S	≤5	
T2		S	1	

5.3.4.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. A RRC message implying handover shall be sent to the UE during period T1. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. Starting at T2, Cell 2 becomes detectable and the UE receives a RRC handover command from the network.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell
- 2. Set the parameters according to T1 in Table's 5.3.4.5-1 and 5.3.4.5-2. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. The SS shall transmit the message containing Information Element systemTimeInfo as defined in TS 36.331 [5] clause 6.3.1. The neighbour cell shall broadcast its own PN offset. The SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. The SS shall transmit a MobilityFromEUTRACommand message implying handover to Cell 2.
- 6. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T1 to T2 as specified in Table's 5.3.4.5-1 and 5.3.4.5-2.
- 7. If the UE starts to transmit the Reverse Control Channel to Cell 2 in less than 200 ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure testes is increased by one.
- 8. After T2 expires, the UE shall be switched off. Then ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.

- 9. The SS shall set a different PN Offset on Cell 2 so that the previous timing information of Cell 2 is invalid in the UE for the next iteration of the test procedure loop.
- 10. Repeat steps 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.3.4.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions [FFS]

5.3.4.5 Test requirement

Tables 5.3.4.4.1-1, 5.3.4.5-1 and 5.3.4.5-2 define the primary level settings including test tolerances for E-UTRAN FDD - cdma2000 1xRTT handover: unknown target cell test.

Table 5.3.4.5-1: Cell Specific Test requirement Parameters for Cell 1 E-UTRAN FDD to cdma2000 1xRTT handover: unknown target cell test case

Parameter	Unit	Cell 1 (E-UTRAN FDD)		
		T1	T2	
E-UTRA RF Channel number		,	1	
BW _{channel}	MHz	10		
OCNG Patterns defined in D.1.1 (OP.1 FDD)		OP.1	FDD	
PBCH RA	dB			
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB	(0	
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA Note 1	dB			
OCNG_RB Note 1	dB			
$N_{oc}^{ m Note~2}$	dBm/15 kHz	-9	98	
RSRP Note 3	dBm/15 kHz	-98 + TT	-98 + TT	
\hat{E}_s/N_{oc}	dB	0 + TT	0 + TT	
\hat{E}_s/I_{ot}	dB	0 + TT	0 + TT	
Propagation Condition		AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for

 $N_{\it oc}$ to be fulfilled.

Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Pilot Strength

Propagation Condition

Cell 2 (cdma2000 1X) **Parameter** Unit T1 T2 Pilot E dB -7 Sync E_c dB -16 Paging E_c (4.8 kbps) -12 dΒ 0 + TT -infinity \hat{I}_{or}/I_{oc} dB dBm/1.2288 -55 MHz CDMA2000 1xRTT -infinity -10 + TT

AWGN

Table 5.3.4.5-2: Cell Specific Test requirement Parameters for Cell 2 E-UTRAN FDD to cdma2000 1xRTT handover: unknown target cell test case

The handover to an unknown target cell delay is defined as the time from the beginning of time period T2, to the moment the UE start to transmit the reverse control channel in cdma2000 1xRTT to Cell 2.

dB

The handover delay D_{handover} test requirement in this case is expressed as:

Handover delay $D_{handover} = maximum RRC procedure delay + T_{interrupt}$

$$T_{interrupt} = T_{IU} + [40] + [10]*KC*SW_K + [10]*OC*SW_O ms$$

 $T_{\text{IU}} = 20 \text{ ms}$; T_{IU} can be up to one cdma2000 1xRTT frame (20 ms).

$$SW_O = 1$$
; $SW_O = \left[\frac{srch_win_o}{60} \right]$ where $srch_win_o$ is the number of cdma2000 1xRTT chips (60) indicated

by the search window for unknown target cdma2000 1xRTT cells in the message

KC = 0; KC is the number of known target cdma2000 1xRTT cells (0).

OC = 1; OC is the number of unknown target cdma2000 1xRTT cells (1).

Maximum RRC procedure delay = 130 ms as defined in TS 36.133 [4].

The handover delay $D_{handover}$ shall be less than a total of 200 ms in this test case (note: this gives a total of 130 ms for maximum RRC procedure delay plus 70 ms for Tinterrupt).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

6 RRC Connection Mobility Control

When the UE is in RRC_CONNECTED, for which security has been activated, initiate the RRC re-establishment procedure in order to continue the RRC connection, the RRC re-establishment process takes place. In this process the UE initiates the procedure when one of the following conditions is met: upon re-entry of the service area after having detected radio link failure, upon handover failure or when lower layers detect problems as defined in TS 36.331 [5] clause 5.3.7.2. After selecting the best cell the UE send a 'RRC Connection Re-establishment Request message' to the System Simulator as defined in TS 36.331 [5] clause 5.3.7. The connection re-establishment succeeds only if the concerned cell is prepared i.e. has a valid UE context within the specified UE re-establishment delay period.

When the random access procedure is initiated by a PDCCH order or by the MAC sublayer itself, the random access process takes place. This process allows the PDCCH order or RRC optionally to indicate a random access preamble and PRACH resource as defined in TS 36.321 [11] clause 5.1. In this process from the physical layer perspective, the L1 random access procedure encompasses the transmission of random access preamble and random access response as

defined in TS 36.213 [8] clause 6.1. The random access procedure is used when establishing the L1 communication between the UE and E-UTRAN.

SS transmits PDSCH via PDCCH DCI format 1A for C_RNTI to transmit the DL RMC according to Annex A1. The SS sends downlink MAC padding bits on the DL RMC.

Uplink is configured according to Annex A.3. This applies only for Re-establishment tests (subclause 6.1).

6.1 RRC Re-establishment

6.1.1 E-UTRAN FDD Intra-frequency RRC Re-establishment

6.1.1.1 Test purpose

To verify that the UE is able to send a RRC Connection Re-establishment Request message to the System Simulator within the specified re-establishment delay limits from the moment it detects a loss in RRC connection.

6.1.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

6.1.1.3 Minimum conformance requirements

In RRC connected mode the UE shall be capable of sending RRCConnectionReestablishmentRequest message within $T_{re\text{-establish_delay}}$ seconds from the moment it detects a loss in RRC connection. The total RRC connection delay ($T_{re\text{-establish_delay}}$) shall be less than:

$$T_{re-esta}blish_delay = TUL_grant + T_{UE\ re-establish\ delay}$$

 T_{UL_grant} : It is the time required to acquire and process uplink grant from the target cell. The uplink grant is required to transmit *RRCConnectionReestablishmentRequest* message.

The UE re-establishment delay ($T_{UE_re-establish_delay}$) is the time between the moments when any of the conditions requiring RRC re-establishment as defined in section 5.3.7 in TS 36.331 [5] is detected by the UE to the time when the UE sends PRACH to the target cell. The UE re-establishment delay ($T_{UE_re-establish_delay}$) requirement shall be less than:

$$TUE$$
-re-establish_delay = $50 \text{ ms} + Nfreq*Tsearch + TSI + TPRACH$

T_{search}: It is the time required by the UE to search the target cell.

 $T_{\text{search}} = \text{It is [100]}$ ms if the target cell is known by the UE; the target cell is known if it has been measured by the UE in the last 5 seconds.

 $T_{\text{search}} = \text{It is } 800 \text{ ms if the target cell is unknown by the UE; the target cell is unknown if it has not been measured by the UE in the last 5 seconds.}$

 T_{SI} = It is the time required for receiving all the relevant system information according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 36.331 [5] for E-UTRAN cell.

T_{PRACH} = The additional delay caused by the random access procedure; it will be at least 10 ms due to random access occasion and there might be additional delay due to ramping procedure.

 N_{freq} : It is the total number of E-UTRA frequencies to be monitored for RRC re-establishment; $N_{\text{freq}} = 1$ if the target cell is known.

There is no requirement if the target cell does not contain the UE context.

The normative reference for this requirement is TS 36.133 [4] clause 6.1.2.1 and A.6.1.1.

6.1.1.4 Test description

6.1.1.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS and AWGN noise source to the UE antenna connectors as shown in TS 36.508 [7] Annex A Figure A.14.
- 2. The parameter settings for the cells are set up according to Table 6.1.1.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 6.1.1.4.3.
- 5. There is one E-UTRA FDD carrier and two cells specified in the test. Cell 1 is the cell used for registration with the power level set according to Annex C.0 and C.1 for this test.

Table 6.1.1.4.1-1: General test parameters for E-UTRAN FDD intra-frequency RRC Re-establishment test case

Parameter		Unit	Value	Comment	
PDSCH parameters			DL Reference Measurement Channel R.0 FDD	As specified in section A. 1.1	
PCFICH/PDCCH/PHICH parameters			DL Reference Measurement Channel R.6 FDD	As specified in section A.2.1	
Initial conditions	Active cell		Cell 1		
	Neighbouring cell		Cell 2		
Final condition	Active cell		Cell 2		
E-UTRA RF Channel Number			1	Only one FDD carrier frequency is used.	
Channel Bandwidth (BW _{channel})		MHz	10		
N310			1	Maximum consecutive out-of-sync indications from lower layers	
N311		-	1	Minimum consecutive in-sync indications from lower layers	
T310		ms	0	Radio link failure timer; T310 is disabled	
T311		ms	3000	RRC re-establishment timer	
DRX			OFF		
CP length			Normal		
Access Barring Information		-	Not Sent	No additional delays in random	
PRACH configuration index			4	access procedure. As specified in table 5.7.1-2 in TS 36.211	
Time offset between cells		ms	3	Asynchronous cells 3ms or 92160*Ts	
T1		S	5		
T2		ms	200		
T3	·	S	3		

6.1.1.4.2 Test procedure

The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.

- 2. Set the parameters according to T1 in Table 6.1.1.5-1. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.1.1.5-1. T2 starts
- 6. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 6.1.1.5-1. T3 starts
- 7. If the UE starts to send PRACH preambles to cell 2 for sending the *RRCConnectionReestablishmentRequest* message to cell 2 within 1.5 s from the beginning of time period T3, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 8. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 9. Repeat step 2-8 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

6.1.1.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 6.1.1.4.3-1: Common Exception messages for E-UTRAN FDD Intra-frequency RRC Reestablishment

Default Message Contents	
Common contents of system information	Table H.2.5-1
blocks exceptions	
Default RRC messages and information	Table H.3.2-1
elements contents exceptions	

Table 6.1.1.4.3-2: MeasConfig-DEFAULT: Additional E-UTRAN intra frequency RRC Re-establishment requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4	.6.6-1 MeasConfig-DEFAULT		
Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModList SEQUENCE (SIZE (1maxObjectId)) OF SEQUENCE {			
measObjectId	IdMeasObject-f1		
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA- GENERIC(f1)		
}			
}			
reportConfigToRemoveList	Not present		
reportConfigToAddModifyList	Not present		
measIdToRemoveList	Not present		
measIdToAddModifyList	Not present		
quantityConfig	QuantityConfig-DEFAULT		
measGapConfig	Not present		
s-Measure	Not present		
hrpd-PreRegistrationInfo	Not present		
speedDependentParameters	Not present		
}			

6.1.1.5 Test requirement

Table 6.1.1.5-1 defines the primary level settings including test tolerances for E-UTRAN FDD Intra-frequency RRC Re-establishment test case.

Table 6.1.1.5-1: Cell specific test parameters for E-UTRAN FDD intra-frequency RRC Reestablishment test case

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	Т3	T1	T2	Т3
E-UTRA RF Channel			1			1	
Number							
BW _{channel}	MHz		10			10	
OCNG Patterns		OP.1	OP.1	OP.2	OP.2 FDD	OP.2 FDD	OP.1 FDD
defined in D.1.1 (OP.1		FDD	FDD	FDD			
FDD) and in D.1.2							
(OP.2 FDD)							
PBCH_RA	dB						
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PCFICH_RB	dB						
PHICH_RA	dB						
PHICH_RB	dB		0			0	
PDCCH_RA	dB						
PDCCH_RB	dB						
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA ^{Note 1}	dB						
OCNG_RB ^{Note 1}	dB						
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	dB	1.54	-Infinity	-Infinity	-3.79	4	4
$N_{oc}^{ m Note~2}$	dBm/15 KHz				-98		
\hat{E}_s/N_{oc}	dB	7	-Infinity	-Infinity	4	4	4
RSRP Note 3	dBm/15 KHz	-91	-Infinity	-Infinity	-94	-94	-94
Propagation Condition					AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the RRCConnectionReestablishmentRequest message to cell 2.

The RRC re-establishment delay to a known E-UTRA FDD intra frequency cell shall be less than 1.5 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-establish_delay}} = T_{UL_grant} + T_{UE_re\text{-establish_delay}}.$$

Where:

 T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$N_{freq} = 1$$

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

 $T_{\text{search}} = 100 \text{ ms}$

 $T_{SI} = 1280$ ms; it is the time required for receiving all the relevant system information as defined in TS 36.331 [5] for the target E-UTRAN FDD cell.

 $T_{PRACH} = 15$ ms; it is the additional delay caused by the random access procedure.

This gives a total of 1445 ms, within the allowance of 1.5 s in the test case.

6.1.2 E-UTRAN FDD Inter-frequency RRC Re-establishment

6.1.2.1 Test purpose

To verify that the UE is able to send a RRC Connection Re-establishment Request message to the System Simulator within the specified re-establishment delay limits from the moment it detects a loss in RRC connection.

6.1.2.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

6.1.2.3 Minimum conformance requirements

In RRC connected mode the UE shall be capable of sending RRCConnectionReestablishmentRequest message within $T_{re\text{-establish_delay}}$ seconds from the moment it detects a loss in RRC connection. The total RRC connection delay ($T_{re\text{-establish_delay}}$) shall be less than:

$$T_{re\text{-establish_delay}} = T_{UL_grant} + T_{UE_re\text{-establish_delay}}$$

 T_{UL_grant} : It is the time required to acquire and process uplink grant from the target cell. The uplink grant is required to transmit RRCConnectionReestablishmentRequest message.

The UE re-establishment delay ($T_{UE_re-establish_delay}$) is the time between the moments when any of the conditions requiring RRC re-establishment as defined in section 5.3.7 in TS 36.331 [5] is detected by the UE to the time when the UE sends PRACH to the target cell. The UE re-establishment delay ($T_{UE_re-establish_delay}$) requirement shall be less than:

$$TUE\text{-re-establish_delay} = 50 \text{ ms} + Nfreq*Tsearch + TSI + TPRACH$$

 T_{search} : It is the time required by the UE to search the target cell.

 $T_{\text{search}} = \text{It is [100]}$ ms if the target cell is known by the UE; the target cell is known if it has been measured by the UE in the last 5 seconds.

 $T_{\text{search}} = \text{It is } 800 \text{ ms if the target cell is unknown by the UE; the target cell is unknown if it has not been measured by the UE in the last 5 seconds.}$

 T_{SI} = It is the time required for receiving all the relevant system information according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 36.331 [5] for E-UTRAN cell.

T_{PRACH} = The additional delay caused by the random access procedure; it will be at least 10 ms due to random access occasion and there might be additional delay due to ramping procedure.

 N_{freq} : It is the total number of E-UTRA frequencies to be monitored for RRC re-establishment; $N_{\text{freq}} = 1$ if the target cell is known.

There is no requirement if the target cell does not contain the UE context.

The normative reference for this requirement is TS 36.133 [4] clause 6.1.2.1 and A.6.1.2.

6.1.2.4 Test description

6.1.2.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS and AWGN noise source to the UE antenna connectors as shown in TS 36.508 [7] Annex A Figure A.14.
- 2. The parameter settings for the cells are set up according to Table 6.1.2.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 6.1.2.4.3.
- 5. There is one E-UTRA FDD carrier and two cells specified in the test. Cell 1 is the cell used for registration with the power level set according to Annex C.0 and C.1 for this test.

Table 6.1.2.4.1-1: General test parameters for E-UTRAN FDD inter-frequency RRC Re-establishment test case

Parameter		Unit	Value	Comment
PDSCH parameters			DL Reference Measurement	As specified in section A.1.1
			Channel R.0 FDD	
PCFICH/PDCCH/PHICH parameters			DL Reference Measurement	As specified in section A.2.1
			Channel R.6 FDD	
1	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
E-UTRA RF Channe	el Number (cell 1)		1	
E-UTRA RF Channe	el Number (cell 2)		2	
E-UTRA FDD inter-frequency carrier list			1	2 E-UTRA FDD carrier
size				frequencies in total: 1 intra-
				frequency and 1 inter-frequency
Channel Bandwidth (BW _{channel})		MHz	10	
N310		-	1	Maximum consecutive out-of-sync
				indications from lower layers
N311		-	1	Minimum consecutive in-sync
				indications from lower layers
T310		ms	0	Radio link failure timer; T310 is
				disabled
T311		ms	5000	RRC re-establishment timer
DRX			OFF	
CP length			Normal	
Access Barring Info	mation	-	Not Sent	No additional delays in random
				access procedure.
PRACH configuration	n index		4	As specified in table 5.7.1-2 in TS
				36.211
Time offset between cells		ms	3	Asynchronous cells
				3ms or 92160*Ts
T1		S	5	
T2		ms	200	
T3		s	5	

6.1.2.4.2 Test procedure

The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 2. Set the parameters according to T1 in Table 6.1.2.5-1. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- $4. \ \ The \ UE \ shall \ transmit \ RRCConnection Reconfiguration Complete \ message.$
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.1.2.5-1. T2 starts
- 6. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 6.1.2.5-1. T3 starts
- 7. If the UE starts to send PRACH preambles to cell 2 for sending the *RRCConnectionReestablishmentRequest* message to cell 2 within 3 s from the beginning of time period T3, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 8. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.. Cell 1 is the active cell.
- 9. Repeat step 2-8 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

6.1.2.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 6.1.2.4.3-1: Common Exception messages for E-UTRAN FDD Inter-frequency RRC Reestablishment

Default Message Contents		
Common contents of system information blocks exceptions	Table H.2.5-2	
Default RRC messages and information elements contents exceptions	Table H.3.2-1	

Table 6.1.2.4.3-2: MeasConfig-DEFAULT: Additional E-UTRAN inter frequency RRC Re-establishment requirement

Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModList SEQUENCE OF {	2 entry		
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f1		
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA- GENERIC(f1)	serving frequency	
}			
}			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f2		
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA- GENERIC(f2)	inter frequency	
}			
}			
}			
reportConfigToRemoveList	Not present		
reportConfigToAddModifyList	Not present		
measIdToRemoveList	Not present		
measIdToAddModifyList	Not present		
quantityConfig	QuantityConfig-DEFAULT		
measGapConfig	MeasGapConfig-GP1		
s-Measure	Not present		
preRegistrationInfoHRPD	Not present		
speedStatePars	Not present		

6.1.2.5 Test requirement

Table 6.1.2.5-1 defines the primary level settings including test tolerances for E-UTRAN FDD Inter-frequency RRC Re-establishment test case.

Table 6.1.2.5-1: Cell specific test parameters for E-UTRAN FDD inter-frequency RRC Reestablishment test case

Parameter	Unit		Cell 1			Cell 2	
		T1	T2	T3	T1	T2	T3
E-UTRA RF Channel			1			2	
Number							
BW _{channel}	MHz		10			10	
OCNG Patterns		OP.1	OP.1	OP.2	OP.2 FDD	OP.2 FDD	OP.1 FDD
defined in D.1.1 (OP.1		FDD	FDD	FDD			
FDD) and in D.1.2							
(OP.2 FDD)							
PBCH_RA	dB						
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PCFICH_RB	dB						
PHICH_RA	dB						
PHICH_RB	dB		0			0	
PDCCH_RA	dB						
PDCCH_RB	dB						
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA ^{Note 1}	dB						
OCNG_RB ^{Note 1}	dB						

$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	dB	4	-Infinity	-Infinity	-Infinity	-Infinity	7
$N_{oc}^{ m Note~2}$	dBm/15 KHz				-98		
\hat{E}_s/N_{oc}	dB	4	-Infinity	-Infinity	- Infinity	- Infinity	7
RSRP Note 3	dBm/15 KHz	-94	-Infinity	-Infinity	- Infinity	-Infinity	-91
Propagation Condition		AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{ac} to be fulfilled.

Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the RRCConnectionReestablishmentRequest message to cell 2.

The RRC re-establishment delay to an unknown E-UTRA FDD inter frequency cell shall be less than 3 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

Where:

 T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$TUE_re-establish_delay = 50 \text{ ms} + Nfreq* Tsearch + TSI + TPRACH$$

 $N_{freq} = 2$

 $T_{search} = 800 \text{ ms}$

 $T_{SI} = 1280$ ms; it is the time required for receiving all the relevant system information as defined in TS 36.331 [5] for the target E-UTRAN FDD cell.

 $T_{PRACH} = 15$ ms; it is the additional delay caused by the random access procedure.

This gives a total of 2945 ms, within the allowance of 3 s in the test case.

6.1.3 E-UTRAN TDD Intra-frequency RRC Re-establishment

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined

6.1.3.1 Test purpose

To verify that the UE is able to send a RRC Connection Re-establishment Request message to the System Simulator within the specified re-establishment delay limits from the moment it detects a loss in RRC connection.

6.1.3.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

6.1.3.3 Minimum conformance requirements

In RRC connected mode the UE shall be capable of sending RRCConnectionReestablishmentRequest message within $T_{re\text{-establish_delay}}$ seconds from the moment it detects a loss in RRC connection. The total RRC connection delay ($T_{re\text{-establish_delay}}$) shall be less than:

$$T_{re-establish_delay} = T_{UL_grant} + T_{UE_re-establish_delay}$$

 T_{UL_grant} : It is the time required to acquire and process uplink grant from the target cell. The uplink grant is required to transmit RRCConnectionReestablishmentRequest message.

The UE re-establishment delay ($T_{UE_re-establish_delay}$) is the time between the moments when any of the conditions requiring RRC re-establishment as defined in section 5.3.7 in TS 36.331 [5] is detected by the UE to the time when the UE sends PRACH to the target cell. The UE re-establishment delay ($T_{UE_re-establish_delay}$) requirement shall be less than:

$$TUE$$
-re-establish_delay = $50 \text{ ms} + \text{Nfreq}*\text{Tsearch} + \text{TSI} + \text{TPRACH}$

T_{search} is the time required by the UE to search the target cell.

 T_{search} is [100] ms if the target cell is known by the UE; the target cell is known if it has been measured by the UE in the last 5 seconds.

 T_{search} is 800 ms if the target cell is unknown by the UE; the target cell is unknown if it has not been measured by the UE in the last 5 seconds.

 T_{SI} is the time required for receiving all the relevant system information according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 36.331 [5] for E-UTRAN cell.

 T_{PRACH} is the additional delay caused by the random access procedure; it will be at least 10 ms due to random access occasion and there might be additional delay due to ramping procedure.

 N_{freq} is the total number of E-UTRA frequencies to be monitored for RRC re-establishment; $N_{freq} = 1$ if the target cell is known.

There is no requirement if the target cell does not contain the UE context.

The normative reference for this requirement is TS 36.133 [4] clause 6.1.2.1 and A.6.1.3.

6.1.3.4 Test description

6.1.3.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS and AWGN noise source to the UE antenna connectors as shown in TS 36.508 [7] Annex A Figure A.14.
- 2. The parameter settings for the cells are set up according to Table 6.1.3.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 6.1.3.4.3.
- 5. There is one E-UTRA TDD carrier and two cells specified in the test. Cell 1 is the cell used for registration with the power level set according to Annex C.0 and C.1 for this test.

Table 6.1.3.4.1-1: General test parameters for E-UTRAN TDD intra-frequency RRC Re-establishment test case

Parameter		Unit	Value	Comment
PDSCH parameters			DL Reference Measurement Channel R.0 TDD	As specified in section A.1.2
PCFICH/PDCCH/	PHICH parameters		DL Reference Measurement Channel R.6 TDD	As specified in section A.2.2
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
E-UTRA RF Chan	nel Number		1	Only one TDD carrier frequency is used.
Channel Bandwid	th (BW _{channel})	MHz	10	
N310	·	-	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	Minimum consecutive in-sync indications from lower layers
T310		ms	0	Radio link failure timer; T310 is disabled
T311		ms	3000	RRC re-establishment timer
DRX			OFF	
CP length			Normal	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Special subframe	configuration		6	As specified in table 4.2-1 in TS 36.211
Uplink-downlink co	onfiguration		1	As specified in table 4.2-2 in TS 36.211
PRACH configuration index			53	As specified in table 5.7.1-3 in TS 36.211
Time offset between cells		μs	3	Synchronous cells
				3μs or 92*Ts
T1		S	5	
T2		ms	200	
T3		S	3	

6.1.3.4.2 Test procedure

The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.Cell 1 is the active cell
- 2. Set the parameters according to T1 in Table 6.1.3.5-1. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.1.3.5-1. T2 starts
- 6. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 6.1.3.5-1. T3 starts
- 7. If the UE starts to send PRACH preambles to cell 2 within 1.5 s from the beginning of time period T3. then the number of successful tests is increased by one.
- 8. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 9. Repeat step 2-8 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

6.1.3.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 6.1.3.4.3-1: Common Exception messages for E-UTRAN intra frequency RRC Re-establishment requirement

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.5-1
Default RRC messages and information elements contents exceptions	Table H.3.2-2

Table 6.1.3.4.3-2: MeasConfig-DEFAULT: Additional E-UTRAN intra frequency RRC Re-establishment requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.	6.6-1 MeasConfig-DEFAULT		
Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModList SEQUENCE (SIZE			
(1maxObjectId)) OF SEQUENCE {			
measObjectId	IdMeasObject-f1		
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA-		
	GENERIC(f1)		
}			
}			
reportConfigToRemoveList	Not present		
reportConfigToAddModifyList	Not present		
measIdToRemoveList	Not present		
measIdToAddModifyList	Not present		
quantityConfig	QuantityConfig-DEFAULT		
measGapConfig	Not present		
s-Measure	Not present		
hrpd-PreRegistrationInfo	Not present		
speedDependentParameters	Not present		
}			

6.1.3.5 Test requirement

Table 6.1.3.5-1 defines the primary level settings including test tolerances for E-UTRAN TDD Intra-frequency RRC Re-establishment test case.

Table 6.1.3.5-1: Cell specific test parameters for E-UTRAN TDD intra-frequency RRC Reestablishment test case

Parameter	Unit		Cell 1		Cell 2			
		T1	T2	Т3	T1	T2	Т3	
E-UTRA RF Channel			1			1		
Number								
BW _{channel}	MHz		10			10		
OCNG Patterns		OP.1	OP.1	OP.2	OP.2 TDD	OP.2 TDD	OP.1 TDD	
defined in D.2.1 (OP.1		TDD	TDD	TDD				
TDD) and in D.2.2								
(OP.2 TDD)								
PBCH_RA	dB							
PBCH_RB	dB							
PSS_RA	dB							
SSS_RA	dB							
PCFICH_RB	dB							
PHICH_RA	dB							
PHICH_RB	dB		0		0			
PDCCH_RA	dB							
PDCCH_RB	dB							
PDSCH_RA	dB							
PDSCH_RB	dB							
OCNG_RA ^{Note 1}	dB							
OCNG_RB ^{Note 1}	dB							
\hat{E}_s/I_{ot}	dB	1.54+TT	-Infinity	-Infinity	-3.79+TT	4+TT	4+TT	
$N_{oc}^{ m Note2}$	dBm/15 KHz	-98						
\hat{E}_s/N_{oc}	dB	7+TT	-Infinity	-Infinity	4+TT	4+TT	4+TT	
RSRP Note 3	dBm/15 KHz	-91+TT	-Infinity	-Infinity	-94+TT	-94+TT	-94+TT	
Propagation Condition		AWGN						
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OEDM symbols								

- density is achieved for all OFDM symbols.
- Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{ac} to be fulfilled.
- RSRP levels have been derived from other parameters for information purposes. They are not settable Note 3: parameters themselves.

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the RRCConnectionReestablishmentRequest message to cell 2.

The RRC re-establishment delay to a known E-UTRA TDD intra frequency cell shall be less than 1.5 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re-establish_delay} = T_{UL_grant} + T_{UE_re-establish_delay}$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re\text{-establish_delay}} = 50 \text{ ms} + N_{freq} \text{*} T_{search} + T_{SI} + T_{PRACH}$$

 $N_{freq} = 1$

 $T_{\text{search}} = 100 \text{ ms}$

 $T_{SI} = 1280$ ms; it is the time required for receiving all the relevant system information as defined in TS 36.331 [5] for the target E-UTRAN TDD cell.

T_{PRACH} = 15 ms; it is the additional delay caused by the random access procedure.

This gives a total of 1445 ms, within the allowance of 1.5 s in the test case.

6.1.4 E-UTRAN TDD Inter-frequency RRC Re-establishment

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined

6.1.4.1 Test purpose

To verify that the UE is able to send a RRC Connection Re-establishment Request message to the System Simulator within the specified re-establishment delay limits from the moment it detects a loss in RRC connection.

6.1.4.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

6.1.4.3 Minimum conformance requirements

In RRC connected mode the UE shall be capable of sending RRCConnectionReestablishmentRequest message within $T_{re-establish_delay}$ seconds from the moment it detects a loss in RRC connection. The total RRC connection delay ($T_{re-establish_delay}$) shall be less than:

$$T_{re-establish_delay} = T_{UL_grant} + T_{UE_re-establish_delay}$$

 T_{UL_grant} : It is the time required to acquire and process uplink grant from the target cell. The uplink grant is required to transmit RRCConnectionReestablishmentRequest message.

The UE re-establishment delay ($T_{UE_re-establish_delay}$) is the time between the moments when any of the conditions requiring RRC re-establishment as defined in section 5.3.7 in TS 36.331 [5] is detected by the UE to the time when the UE sends PRACH to the target cell. The UE re-establishment delay ($T_{UE_re-establish_delay}$) requirement shall be less than:

$$TUE$$
-re-establish_delay = $50 \text{ ms} + \text{Nfreq}*\text{Tsearch} + \text{TSI} + \text{TPRACH}$

T_{search}: It is the time required by the UE to search the target cell.

 $T_{\text{search}} = \text{It is [100]}$ ms if the target cell is known by the UE; the target cell is known if it has been measured by the UE in the last 5 seconds.

 T_{search} = It is 800 ms if the target cell is unknown by the UE; the target cell is unknown if it has not been measured by the UE in the last 5 seconds.

 T_{SI} = It is the time required for receiving all the relevant system information according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 36.331 [5] for E-UTRAN cell.

 T_{PRACH} = The additional delay caused by the random access procedure; it will be at least 10 ms due to random access occasion and there might be additional delay due to ramping procedure.

 N_{freq} : It is the total number of E-UTRA frequencies to be monitored for RRC re-establishment; $N_{\text{freq}} = 1$ if the target cell is known.

There is no requirement if the target cell does not contain the UE context.

The normative reference for this requirement is TS 36.133 [4] clause 6.1.2.1 and A.6.1.4.

6.1.4.4 Test description

6.1.4.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS and AWGN noise source to the UE antenna connectors as shown in TS 36.508 [7] Annex A Figure A.14.
- 2. The parameter settings for the cells are set up according to Table 6.1.4.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 6.1.4.4.3.
- 5. There is one E-UTRA TDD carrier and two cells specified in the test. Cell 1 is the cell used for registration with the power level set according to Annex C.0 and C.1 for this test.

Table 6.1.4.4.1-1: General test parameters for E-UTRAN TDD inter-frequency RRC Re-establishment test case

	meter	Unit	Value	Comment
PDSCH parameters			DL Reference Measurement Channel R.0 TDD	As specified in section A. 1.2
PCFICH/PDCCH/PH	•		DL Reference Measurement Channel R.6 TDD	As specified in section A. 2.2
	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
	Active cell		Cell 2	
E-UTRA RF Channe	el Number (cell 1)		1	
E-UTRA RF Channe	el Number (cell 2)		2	
size	requency carrier list		1	2 E-UTRA TDD carrier frequencies in total: 1 intra- frequency and 1 inter-frequency
Channel Bandwidth	(BW _{channel})	MHz	10	
N310		-	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	Minimum consecutive in-sync indications from lower layers
T310		ms	0	Radio link failure timer; T310 is disabled
T311		ms	5000	RRC re-establishment timer
DRX			OFF	
CP length			Normal	
Access Barring Infor	mation	-	Not Sent	No additional delays in random access procedure.
Special subframe co	nfiguration		6	As specified in table 4.2-1 in TS 36.211
Uplink-downlink con	figuration		1	As specified in table 4.2-2 in TS 36.211
PRACH configuration index			53	As specified in table 5.7.1-3 in TS 36.211
Time offset between	cells	μs	3	Synchronous cells 3µs or 92*Ts
T1		S	5	
T2		ms	200	
T3		s	5	

6.1.4.4.2 Test procedure

The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.Cell 1 is the active cell.
- 2. Set the parameters according to T1 in Table 6.1.3.5-1. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.1.3.5-1. T2 starts.
- 6. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 6.1.3.5-1. T3 starts.
- 7. If the UE starts to send PRACH preambles to cell 2 within 3s from the beginning of time period T3. then the number of successful tests is increased by one.
- 8. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2. Cell 1 is the active cell.
- 9. Repeat step 2-8 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

6.1.4.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 6.1.4.4.3-1: Common Exception messages for E-UTRAN inter frequency RRC Re-establishment requirement

Default Message Contents					
Common contents of system information	Table H.2.5-2				
blocks exceptions					
Default RRC messages and information	Table H.3.2-2				
elements contents exceptions					

Table 6.1.4.4.3-2: MeasConfig-DEFAULT: Additional E-UTRAN inter frequency RRC Re-establishment requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {	Taragri omani	Commission	Jonanion
measObjectToRemoveList	Not present		
measObjectToAddModList SEQUENCE OF {	2 enrty		
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f1		
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA- GENERIC(f1)	serving frequency	
}			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f2		
measObject CHOICE {	,		
MeasObjectEUTRA	MeasObjectEUTRA- GENERIC(f2)	inter frequency	
}			
}			
}			
reportConfigToRemoveList	Not present		
reportConfigToAddModifyList	Not present		
measIdToRemoveList	Not present		
measIdToAddModifyList	Not present		
quantityConfig	QuantityConfig-DEFAULT		
measGapConfig	MeasGapConfig-GP1		
s-Measure	Not present		
preRegistrationInfoHRPD	Not present		-
speedDependentParameters	Not present		

6.1.4.5 Test requirement

Table 6.1.4.5-1 defines the primary level settings including test tolerances for E-UTRAN TDD Intra-frequency RRC Re-establishment test case.

Table 6.1.4.5-1: Cell specific test parameters for E-UTRAN TDD inter-frequency RRC Reestablishment test case

Parameter	Unit		Cell 1			Cell 2	
		T1	T2	T3	T1	T2	Т3
E-UTRA RF Channel			1			2	
Number							
BW _{channel}	MHz		10			10	
OCNG Patterns		OP.1	OP.1	OP.2	OP.2 TDD	OP.2 TDD	OP.1 TDD
defined in A.2.1 (OP.1		TDD	TDD	TDD			
TDD) and in A.2.2							
(OP.2 TDD)	ı.						
PBCH_RA	dB						
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PCFICH_RB	dB						
PHICH_RA	dB	1					
PHICH_RB	dB	1	0			0	
PDCCH_RA	dB						
PDCCH_RB	dB	1					
PDSCH_RA	dB	1					
PDSCH_RB	dB	1					
OCNG_RA ^{Note 1}	dB	1					
OCNG_RB ^{Note 1}	dB]					

$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	dB	4+TT	-Infinity	-Infinity	-Infinity	-Infinity	7+TT
N _{oc} Note 2	dBm/15 KHz				-98		
\hat{E}_s/N_{oc}	dB	4+TT	-Infinity	-Infinity	- Infinity	- Infinity	7+TT
RSRP Note 3	dBm/15 KHz	-94+TT	-Infinity	-Infinity	- Infinity	-Infinity	-91+TT
Propagation Condition		AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{ac} to be fulfilled.

Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the RRCConnectionReestablishmentRequest message to cell 2.

The RRC re-establishment delay to an unknown E-UTRA TDD inter frequency cell shall be less than 3 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-establish_delay}} = T_{UL_grant} + T_{UE_re\text{-establish_delay}}.$$

Where:

 T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re\text{-establish_delay}} = 50 \text{ ms} + N_{freq} * T_{search} + T_{SI} + T_{PRACH}$$

$$N_{freq} = 2$$

 $T_{search} = 800 \text{ ms}$

 $T_{SI} = 1280$ ms; it is the time required for receiving all the relevant system information as defined in TS 36.331 [5] for the target E-UTRAN TDD cell.

 $T_{PRACH} = 15$ ms; it is the additional delay caused by the random access procedure.

This gives a total of 2945 ms, within the allowance of 3 s in the test case.

6.2 Random Access

6.2.1 E-UTRAN FDD - Contention Based Random Access Test

6.2.1.1 Test purpose

To verify that the UE behaviour of the random access procedure is according to the E-UTRAN FDD contention based random access requirements in an AWGN channel model and that the PRACH power settings and timing are within the specified limits.

6.2.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

6.2.1.3 Minimum conformance requirements

The random access procedure is used when establishing the layer 1 communication between the UE and E-UTRAN. The random access is as defined in TS 36.213 [8] clause 6 and the control of the RACH transmission is as defined in TS 36.321 [11] clause 5.1.

The UE shall have capability to calculate PRACH transmission power according to the PRACH power formula as defined in TS 36.213 [8] clause 6.1 and apply this power level at the first preamble or additional preambles. The absolute power applied to the first preamble shall have an accuracy as defined in table 6.3.5.1.1-1 of TS 36.101 [2] clause 6.3.5.1.1. The relative power applied to additional preambles shall have an accuracy as specified in table 6.3.5.2.1-1 of TS 36.101 [2] clause 6.3.5.2.1.

The UE shall indicate a Random Access problem to upper layers if the maximum number of preambles transmission counter has been reached.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires if no Random Access Response is received within the RA Response window defined in clause 5.1.4 TS 36.321.

The UE shall re-transmit the msg3 upon the reception of a NACK on msg3.

The UE shall send ACK if the Contention Resolution is successful.

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires if the Contention Resolution Timer expires.

The normative reference for this requirement is TS 36.133 [4] clause 6.2.2.1 and A.6.2.1.

6.2.1.4 Test description

6.2.1.4.1 Initial conditions

Test Environment: Normal, TL/VL, TL/VH, TH/VL, TH/VH; as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A, Figure A.18.
- 2. Propagation conditions are set according to Annex B clause B. 0.
- 3. There is one E-UTRA FDD carrier and one cell specified in the test. Cell 1 is the cell used for registration with the power level set according to Annex C.0 and C.1 for this test.

6.2.1.4.2 Test procedure

The test consists of a single cell. The UE has a downlink PDSCH allocated centred on the centre sub-carrier. The E-UTRAN shall not explicitly signal a Random Access Preamble ID to the UE.

- 1. Ensure the UE is in State 2A according to TS 36.508 [7] clause 4.5.2A.
- 2. Set the parameters according to Tables 6.2.1.5-1 and 6.2.1.5-2 as appropriate. Propagation conditions are set according to Annex B clause B.1.1.
- 3. The UE shall establish a connection setup with SS, the random access procedure within the connection setup is used in the test.
- 4. Test 1: Correct behaviour when receiving random access response reception

- 4.1. In Test 1, the UE shall send the preamble to the SS. In response to the first 4 preambles, the SS shall transmit a random access response not corresponding to the transmitted random access preamble.
- 4.2. The UE shall consider the random access response reception not successful then re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires if all received random access response contain random access preamble identifiers that do not match the transmitted random access preamble.
- 4.3. The SS shall transmit a random access response containing a random access preamble identifier corresponding to the transmitted random access after 5 preambles have been received by the SS.
- 4.4. The UE shall consider this random access response reception successful and transmit the msg3.
- 4.5. Measure the power and timing of the first preamble and it shall not exceed the values specified in Tables 6.2.1.5-3 and 6.2.1.5-5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in Tables 6.2.1.5-4 and 6.2.1.5-5.
- 5. Test 2: Correct behaviour when not receiving random access response reception
 - 5.1. Repeat step 1-3.
 - 5.2. In Test 2, the UE shall send the preamble to the SS. The SS shall not respond to the first 4 preamble.
 - 5.3. The UE shall consider the random access response reception not successful then re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires if no random access response is received within the RA Response window of 10 sub-frames.
 - 5.4. The SS shall transmit a random access response containing a random access preamble identifier corresponding to the transmitted random access after 5 preambles have been received by the SS.
 - 5.5. The UE shall consider this random access response reception successful and transmit the msg3.
 - 5.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in Tables 6.2.1.5-3 and 6.2.1.5-5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in Tables 6.2.1.5-4 and 6.2.1.5-5.
- 6. Test 3: Correct behaviour when receiving a NACK on msg3
 - 6.1. Repeat step 1-3.
 - 6.2. In Test 3, the UE shall send the preamble to the SS. The SS shall transmit a random access response containing a random access preamble identifier corresponding to the transmitted random access after the first preamble has been received by the SS.
 - 6.3. The UE shall consider this random access response reception successful and transmit the msg3.
 - 6.4. The SS shall send NACK to all UE msg3 following a successful random access response.
 - 6.5. The UE shall consider this contention resolution not successful then re-transmit the msg3 upon the reception of a NACK on msg3 until the maximum number of HARQ retransmission is reached.
- 7. Test 4: Correct behaviour when receiving an incorrect message over Temporary C-RNTI
 - 7.1. Repeat step 1-3.
 - 7.2. In Test 4, the UE shall send the preamble to the SS. The SS shall transmit a random access response containing a random access preamble identifier corresponding to the transmitted random access after the first preamble has been received by the SS.
 - 7.3. The UE shall consider this random access response reception successful and transmit the msg3.
 - 7.4. The SS shall send a message addressed to the Temporary C-RNTI with a UE contention resolution identity included in the MAC control element not matching the CCCH SDU transmitted in msg3 uplink message.
 - 7.5. The UE shall consider the contention resolution not successful then re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires.

- 8. Test 5: Correct behaviour when receiving a correct message over Temporary C-RNTI
 - 8.1. In Test 5, the SS shall transmit a random access response containing a random access preamble identifier corresponding to the transmitted random access after the first preamble has been received by the SS.
 - 8.2. The UE shall consider this random access response reception successful and transmit the msg3.
 - 8.3. The SS shall send a message addressed to the Temporary C-RNTI with a UE contention resolution identity included in the MAC control element matching the CCCH SDU transmitted in the msg3 uplink message.
 - 8.4. The UE shall send ACK and consider the contention resolution successful and the random access procedure successfully completed.
- 9. Test 6: Correct behaviour when contention resolution timer expires
 - 9.1. Repeat step 1-3.
 - 9.2. In Test 6, the UE shall send the preamble to the SS. The SS shall transmit a random access response containing a random access preamble identifier corresponding to the transmitted random access after the first preamble has been received by the SS.
 - 9.3. The UE shall consider this random access response reception successful and transmit the msg3.
 - 9.4. The SS shall send an ACK for msg3 but not send msg4 allowing the contention resolution timer to expire.
 - 9.5. The UE shall consider the contention resolution not successful then re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires.
 - 9.6. The SS shall transmit a random access response containing a random access preamble identifier corresponding to the transmitted random access after the first preamble has been received by the SS.
 - 9.7. The UE shall consider this random access response reception successful and transmit the msg3.

6.2.1.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 6.2.1.4.3-1: Common Exception messages for E-UTRAN FDD - Contention Based Random Access test requirement

Default Message Contents	
Common contents of system information	
blocks exceptions	
Default RRC messages and information	Table H.3.2-1
elements contents exceptions	

Table 6.2.1.4.3-2: SystemInformationBlockType1: E-UTRAN FDD - Contention Based Random Access test requirement

Derivation Path: TS 36.508 [7] clause 4.4.3.2, Table 4.4.3.2-3 SystemInformationBlockType1			
Information Element Value/remark Comment Condition			
SystemInformationBlockType1 ::= SEQUENCE {			
p-Max 23 (dBm)			

Table 6.2.1.4.3-3: SystemInformationBlockType3: E-UTRAN FDD - Contention Based Random Access test requirement

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-2 SystemInformationBlockType3			
Information Element Value/remark Comment Condition			
SystemInformationBlockType3 ::= SEQUENCE {			
p-Max	23 (dBm)		

Table 6.2.1.4.3-4: RACH-ConfigCommon-DEFAULT: E-UTRAN FDD - Contention Based Random Access test requirement

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-12 RACH-ConfigCommon-DEFAULT			
Information Element	Value/remark	Comment	Condition
RACH-ConfigCommon-DEFAULT ::= SEQUENCE {			
preambleInfo SEQUENCE {			
numberOfRA-Preambles	n52		
preamblesGroupAConfig SEQUENCE {}	Not present		
}			
powerRampingParameters SEQUENCE {			
powerRampingStep	dB2		
preambleInitialReceivedTargetPower	dBm-120		
}			

Table 6.2.1.4.3-5: PDSCH-ConfigCommon-DEFAULT: Additional E-UTRAN FDD - Contention Based Random Access test requirement

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-5 PDSCH-ConfigCommon-DEFAULT			
Information Element Value/remark Comment Condition			
PDSCH-ConfigCommon-DEFAULT ::= SEQUENCE {			
referenceSignalPower -5 (dBm) 1TX			

6.2.1.5 Test requirement

Tables 6.2.1.5-1 and 6.2.1.5-2 define the primary level settings for E-UTRAN FDD - contention based random access test. Table 6.2.1.5-5 defines the uplink timing error limit including test tolerances.

Table 6.2.1.5-1: Cell Specific Test requirement Parameters for E-UTRAN FDD - Contention Based Random Access test

Parameter	Unit	Value	Comments
E-UTRA RF Channel Number		1	
BW _{channel}	MHz	10	
OCNG Pattern		OP.1 FDD	As defined in D.1.1.
PDSCH parameters		DL Reference Measurement Channel R.0 FDD	As defined in A.1.1.
PCFICH/PDCCH/PHICH		DL Reference Measurement	As defined in A.1.2.
parameters		Channel R.6 FDD	
PBCH_RA	dB		
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB	0	
PDCCH_RA	dB]	
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA Note 1	dB		
OCNG_RB Note 1	dB		

$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	dB	3	
N_{oc}	dBm/15 KHz	-98	
\hat{E}_s/N_{oc}	dB	3	
lo Note 2	dBm/9 MHz	-65.5	
RSRP Note 3	dBm/15 KHz	-95	
referenceSignalPower	dBm/15 KHz	-5	As defined in clause 6.3.2 in 3GPP TS 36.331 [5].
Configured UE transmitted	dBm	23	As defined in clause 6.2.5
power ($P_{ m CMAX}$)			in 3GPP TS 36.101 [2].
PRACH Configuration Index	-	4	As defined in table 5.7.1-2 in 3GPP TS 36.211 [9].
Back off Parameter Index	-	2	As defined in table 7.2-1 in 3GPP TS 36.321 [11].
Propagation Condition	-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: lo level has been derived from other parameters for information purpose. It is not a settable parameter.

Note 3: RSRP level has been derived from other parameters for information purposes. It is not a settable parameter.

Table 6.2.1.5-2: RACH-Configuration parameters for E-UTRAN FDD - Contention Based Random Access test

Field	Value	Comment	
powerRampingStep	dB2		
preambleInitialReceivedTargetPower	dBm-120		
preambleTransMax	n6		
ra-ResponseWindowSize	sf10	10 sub-frames	
mac-ContentionResolutionTimer	sf48	48 sub-frames	
maxHARQ-Msg3Tx	4		
Note: For further information see Section 6.3.2 in 3GPP TS 36.331 [5].			

Test 1: Correct behaviour when receiving random access response reception

- The power of the first preamble shall be -30 dBm to within the accuracy specified in Table 6.2.1.5-3.
- The relative power for preamble ramping step shall be 2 dB to within the accuracy specified in Table 6.2.1.5-4.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 6.2.1.5-5.

Test 2: Correct behaviour when not receiving random access response reception-

- The power of the first preamble shall be -30 dBm to within the accuracy specified in Table 6.2.1.5-3.
- The relative power for preamble ramping step shall be 2 dB to within the accuracy specified in Table 6.2.1.5-4.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 6.2.1.5-5.

Test 3: Correct behaviour when receiving a NACK on msg3

- The UE shall re-transmit the msg3 upon the reception of a NACK on msg3 until the maximum number of HARQ retransmission is reached.

Test 4: Correct behaviour when receiving an incorrect message over Temporary C-RNTI

- The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires unless the received message includes a UE contention resolution identity MAC control element and the UE contention resolution identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

Test 5: Correct behaviour when receiving a correct message over Temporary C-RNTI

- The UE shall send ACK if the contention resolution is successful.

Test 6: Correct behaviour when contention resolution timer expires

- The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires if the contention resolution timer expires.

Table 6.2.1.5-3: Absolute power tolerance for E-UTRAN FDD - Contention Based Random Access test

Tolerance		
Normal Extreme		
Conditions Conditions		
± 10.1 dB	± 13.1 dB	

Table 6.2.1.5-4: Relative power tolerance for E-UTRAN FDD - Contention Based Random Access test

power step size (Up or down)	PRACH		
	Normal Conditions	Extreme Conditions	
ΔP [dB]	[dB]	[dB]	
2 ≤ ΔP < 3	± 3.7	± 5.7	
Note 1: For extreme conditions	ons an additional ± 2.0 dB rela	kation is allowed for PRACH	

Table 6.2.1.5-5: Test requirements for T_e Timing Error Limit for E-UTRAN FDD – Contention Based Random Access test

Downlink Bandwidth (MHz)	T _e	
≥3	15*T _S	
Note: T _S is the basic timing unit defined in TS 36.211 [9]		

6.2.2 E-UTRAN FDD - Non-Contention Based Random Access Test

6.2.2.1 Test purpose

To verify that the UE behaviour of the random access procedure is according to the E-UTRAN FDD non-contention based random access requirements in an AWGN channel model and that the PRACH power settings and timing are within the specified limits.

6.2.2.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

6.2.2.3 Minimum conformance requirements

The random access procedure is used when establishing the layer 1 communication between the UE and E-UTRAN. The random access is as defined in TS 36.213 [8] clause 6 and the control of the RACH transmission is as defined in TS 36.321 [11] clause 5.1.

The UE shall have capability to calculate PRACH transmission power according to the PRACH power formula as defined in TS 36.213 [8] clause 6.1 and apply this power level at the first preamble or additional preambles. The absolute power applied to the first preamble shall have an accuracy as defined in table 6.3.5.1.1-1 of TS 36.101 [2] clause 6.3.5.1.1. The relative power applied to additional preambles shall have an accuracy as specified in table 6.3.5.2.1-1 of TS 36.101 [2] clause 6.3.5.2.1.

The UE shall indicate a Random Access problem to upper layers if the maximum number of preambles transmission counter has been reached.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall re-transmit the preamble with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

The UE shall re-transmit the preamble with the calculated PRACH transmission power.

The normative reference for this requirement is TS 36.133 [4] clause 6.2.2.2 and A.6.2.2.

6.2.2.4 Test description

6.2.2.4.1 Initial conditions

Test Environment: Normal, TL/VL, TL/VH, TH/VL, TH/VH; as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A, Figure A.18.
- 2. Propagation conditions are set according to Annex B clause B. 0.
- 3. There is one E-UTRA FDD carrier and one cell specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

6.2.2.4.2 Test procedure

The test consists of a single cell. The UE has a downlink PDSCH allocated centred on the centre sub-carrier. The E-UTRAN shall signal a Random Access Preamble ID to the UE via a PDCCH order.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to Tables 6.2.2.5-1 and 6.2.2.5-2 as appropriate. Propagation conditions are set according to Annex B clause B.1.1.
- 3. The SS shall signal a Random Access Preamble ID via a PDCCH order to the UE and initiate a Non-contention based Random Access procedure.
- 4. Test 1: Correct behaviour when receiving Random Access Response
 - 4.1 In Test 1, the UE shall send the signalled preamble to the SS. In response to the first 4 preambles, the SS shall transmit a random access response not corresponding to the transmitted random access preamble.
 - 4.2. The UE shall consider the random access response reception not successful then re-select a preamble and transmit with the calculated PRACH transmission power if all received random access response contain random access preamble identifiers that do not match the transmitted random access preamble.
 - 4.3. The SS shall transmit a random access response containing a random access preamble identifier corresponding to the transmitted random access after 5 preambles have been received by the SS.
 - 4.4. The UE shall consider this random access response reception successful.
 - 4.5. Measure the power and timing of the first preamble and it shall not exceed the values specified in Tables 6.2.2.5-3 and 6.2.2.5-5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in Tables 6.2.2.5-4 and 6.2.2.5-5.
- 5. Test 2: Correct behaviour when not receiving Random Access Response
 - 5.1. Repeat step 1-3.
 - 5.2. In Test 2, the UE shall send the signalled preamble to the SS. The SS shall not respond to the first 4 preamble.

- 5.3. The UE shall consider the random access response reception not successful then re-select a preamble and transmit with the calculated PRACH transmission power.
- 5.4. The SS shall transmit a random access response containing a random access preamble identifier corresponding to the transmitted random access after 5 preambles have been received by the SS.
- 5.5. The UE shall consider this random access response reception successful.
- 5.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in Tables 6.2.2.5-3 and 6.2.2.5-5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in Tables 6.2.2.5-4 and 6.2.2.5-5.

6.2.2.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 6.2.2.4.3-1: Common Exception messages for E-UTRAN FDD - Non-Contention Based Random Access test requirement

Default Message Contents	
Common contents of system information	
blocks exceptions	
Default RRC messages and information	Table H.3.2-1
elements contents exceptions	

Table 6.2.2.4.3-2: SystemInformationBlockType1: E-UTRAN FDD - Non-Contention Based Random Access test requirement

Derivation Path: TS 36.508 [7] clause 4.4.3.2, Table 4.4.3.2-3 SystemInformationBlockType1					
Information Element Value/remark Comment Condition					
SystemInformationBlockType1 ::= SEQUENCE {					
p-Max	23 (dBm)				

Table 6.2.2.4.3-3: RACH-ConfigCommon-DEFAULT: E-UTRAN FDD - Non-Contention Based Random Access test requirement

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-12 RACH-ConfigCommon-DEFAULT				
Information Element Value/remark Comment Co				
RACH-ConfigCommon-DEFAULT ::= SEQUENCE {				
preambleInfo SEQUENCE {				
numberOfRA-Preambles	n52			
preamblesGroupAConfig SEQUENCE {}	Not present			
}				
powerRampingParameters SEQUENCE {				
powerRampingStep	dB2			
preambleInitialReceivedTargetPower	dBm-120			
}				

Table 6.2.2.4.3-4: PDSCH-ConfigCommon-DEFAULT: Additional E-UTRAN FDD - Non-Contention Based Random Access test requirement

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-5 PDSCH-ConfigCommon-DEFAULT				
Information Element Value/remark Comment Condition				
PDSCH-ConfigCommon-DEFAULT ::= SEQUENCE {				
referenceSignalPower	-5 (dBm)		1TX	

Table 6.2.2.4.3-5: *PhysicalConfigDedicated-DEFAULT*: Additional E-UTRAN FDD - Non-Contention Based Random Access test requirement

Derivation Path: TS 36.508 [7] clause 4.8.2, Table 4.8.2.1.6-1 PhysicalConfigDedicated-DEFAULT				
Information Element Value/remark Comment Condition				
PhysicalConfigDedicated-DEFAULT ::= SEQUENCE {				
cqi-ReportConfig	CQI-ReportConfig-		RBC	
	DEFAULT			
soundingRS-LU-ConfigDedicated	Not present		RBC	

Table 6.2.2.4.3-6: MAC-MainConfig-RBC: Additional E-UTRAN FDD - Non-Contention Based Random Access test requirement

Derivation Path: TS 36.508 [7] clause 4.8.2, Table 4.8.2.1.5-1 MAC-MainConfig-RBC				
Information Element Value/remark Comment Condition				
MAC-MainConfig-RBC ::= SEQUENCE {				
timeAlignmentTimerDedicated	Infinity			

6.2.2.5 Test requirement

Tables 6.2.2.5-1 and 6.2.2.5-2 define the primary level settings for E-UTRAN FDD - non-contention based random access test. Table 6.2.2.5-5 defines the uplink timing error limit including test tolerances.

Table 6.2.2.5-1: Cell Specific Test requirement Parameters for E-UTRAN FDD - Non-Contention Based Random Access test

Parameter	Unit	Value	Comments
E-UTRA RF Channel Number		1	
BW _{channel}	MHz	10	
OCNG Pattern		OP.1 FDD	As defined in D.1.1.
PDSCH parameters		DL Reference Measurement	As defined in A.1.1.
		Channel R.0 FDD	
PCFICH/PDCCH/PHICH		DL Reference Measurement	As defined in A.1.2.
parameters		Channel R.6 FDD	
PBCH_RA	dB		
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB	0	
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA Note 1	dB		
OCNG_RB Note 1	dB		
\hat{E}_{s}/I_{ot}	dB	3	
N_{oc}	dBm/15 KHz	-98	
\hat{E}_s/N_{oc}	dB	3	
lo Note 2	dBm/9 MHz	-65.5	
RSRP Note 3	dBm/15 KHz	-95	
referenceSignalPower	dBm/15 KHz	-5	As defined in clause 6.3.2 in 3GPP TS 36.331 [5].
Configured UE transmitted	dBm	23	As defined in clause 6.2.5
power ($P_{ m CMAX}$)			in 3GPP TS 36.101 [2].
PRACH Configuration Index	-	4	As defined in table 5.7.1-2 in 3GPP TS 36.211 [9].
Back off Parameter Index	-	2	As defined in table 7.2-1 in 3GPP TS 36.321 [11].
Propagation Condition	-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: lo level has been derived from other parameters for information purpose. It is not a settable parameter.

Note 3: RSRP level has been derived from other parameters for information purposes. It is not a settable parameter.

Table 6.2.2.5-2: RACH-Configuration parameters for E-UTRAN FDD - Non-Contention Based Random Access test

Field	Value	Comment	
powerRampingStep	dB2		
preambleInitialReceivedTargetPower	dBm-120		
preambleTransMax	n6		
Ra-ResponseWindowSize	sf10	10 sub-frames	
Note: For further information see Section 6.3.2 in 3GPP TS 36.331 [5].			

Test 1: Correct behaviour when receiving Random Access Response

- The power of the first preamble shall be -30 dBm to within the accuracy specified Table 6.2.2.5-3.
- The relative power for preamble ramping step shall be 2 dB to within the accuracy specified in Table 6.2.2.5-4.

- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 6.2.2.5-5.

Test 2: Correct behaviour when not receiving Random Access Response

- The power of the first preamble shall be -30 dBm to within the accuracy specified in Table 6.2.2.5-3...
- The relative power for preamble ramping step shall be 2 dB to within the accuracy specified in Table 6.2.2.5-4.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 6.2.2.5-5.

Table 6.2.2.5-3: Absolute power tolerance for E-UTRAN FDD - Non-Contention Based Random Access test

Tolerance		
Normal Extreme		
Conditions Conditions		
± 10.1 dB	± 13.1 dB	

Table 6.2.2.5-4: Relative power tolerance for E-UTRAN FDD - Non-Contention Based Random Access test

power step size (Up or down)	PRACH		
	Normal Conditions	Extreme Conditions	
ΔP [dB]	[dB]	[dB]	
2 ≤ ΔP < 3	± 3.7	± 5.7	
Note 1: For extreme conditions an additional ± 2.0 dB relaxation is allowed for PRACH allocations			

Table 6.2.2.5-5: Test requirements for Te Timing Error Limit for E-UTRAN FDD – Non-Contention Based Random Access test

Downlink Bandwidth (MHz)	T _e	
≥3	15*T _S	
Note: T _S is the basic timing unit defined in TS 36.211 [9]		

6.2.3 E-UTRAN TDD - Contention Based Random Access Test

6.2.3.1 Test purpose

To verify that the UE behaviour of the random access procedure is according to the E-UTRAN TDD contention based random access requirements in an AWGN channel model and that the PRACH power settings and timing are within the specified limits.

6.2.3.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

6.2.3.3 Minimum conformance requirements

The random access procedure is used when establishing the layer 1 communication between the UE and E-UTRAN. The random access is as defined in TS 36.213 [8] clause 6 and the control of the RACH transmission is as defined in TS 36.321 [11] clause 5.1.

The UE shall have capability to calculate PRACH transmission power according to the PRACH power formula as defined in TS 36.213 [8] clause 6.1 and apply this power level at the first preamble or additional preambles. The absolute power applied to the first preamble shall have an accuracy as defined in table 6.3.5.1.1-1 of TS 36.101 [2] clause 6.3.5.1.1. The relative power applied to additional preambles shall have an accuracy as specified in table 6.3.5.2.1-1 of TS 36.101 [2] clause 6.3.5.2.1.

The UE shall indicate a Random Access problem to upper layers if the maximum number of preambles transmission counter has been reached.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires if no Random Access Response is received within the RA Response window defined in clause 5.1.4 TS 36.321.

The UE shall re-transmit the msg3 upon the reception of a NACK on msg3.

The UE shall send ACK if the Contention Resolution is successful.

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires if the Contention Resolution Timer expires.

The normative reference for this requirement is TS 36.133 [4] clause 6.2.2.1 and A.6.2.3.

6.2.3.4 Test description

6.2.3.4.1 Initial conditions

Test Environment: Normal, TL/VL, TL/VH, TH/VL, TH/VH; as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A, Figure A.18.
- 2. Propagation conditions are set according to Annex B clause B. 0.
- 3. There is one E-UTRA TDD carrier and one cell specified in the test. Cell 1 is the cell used for registration with the power level set according to Annex C.0 and C.1 for this test.

6.2.3.4.2 Test procedure

The test consists of a single cell. The UE has a downlink PDSCH allocated on the centre sub-carrier. The E-UTRAN shall not explicitly signal a Random Access Preamble ID to the UE.

- 1. Ensure the UE is in State 2A according to TS 36.508 [7] clause 4.5.2A.
- 2. Set the parameters according to Tables 6.2.3.5-1 and 6.2.3.5-2 as appropriate. Propagation conditions are set according to Annex B clause B.1.1.
- 3. The UE set up a connection with SS, and the random access procedure used in the connection setup is used in the test.
- 4. Test 1: Correct behaviour when receiving random access response reception
 - 4.1 In Test 1, the UE shall send the preamble to the SS. In response to the first 4 preambles, the SS shall transmit a random access response not corresponding to the transmitted random access preamble.
 - 4.2 The UE shall consider the random access response reception not successful then re- select a preamble and transmit with the calculated PRACH transmission power when the back off time expires if all received

- random access response contain random access preamble identifiers that do not match the transmitted random access preamble.
- 4.3 The SS shall transmit a random access response containing a random access preamble identifier corresponding to the transmitted random access after 5 preambles have been received by the SS.
- 4.4The UE shall consider this random access response reception successful and transmit the msg3.
- 4.5 Measure the power and timing of the first preamble and it shall not exceed the values specified in Tables 6.2.3.5-3 and 6.2.3.5-5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in Tables 6.2.3.5-4 and 6.2.3.5-5.
- 5. Test 2: Correct behaviour when *not* receiving random access response reception
 - 5.1 Repeat step 1-3.
 - 5.2 In Test 2, the UE shall send the preamble to the SS. The SS shall not respond to the first 4 preamble.
 - 5.3 The UE shall consider the random access response reception not successful then re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires if no random access response is received within the RA Response window of 10 sub-frames.
 - 5.4 The SS shall transmit a random access response containing a random access preamble identifier corresponding to the transmitted random access after 5 preambles have been received by the SS.
 - 5.5 The UE shall consider this random access response reception successful and transmit the msg3.
 - 5.6 Measure the power and timing of the first preamble and it shall not exceed the values specified in Tables 6.2.3.5-3 and 6.2.3.5-5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in Tables 6.2.3.5-4 and 6.2.3.5-5.
- 6. Test 3: Correct behaviour when receiving a NACK on msg3
 - 6.1 Repeat step 1-3.
 - 6.2 In Test 3, the UE shall send the preamble to the SS. The SS shall transmit a random access response containing a random access preamble identifier corresponding to the transmitted random access after the first preambles have been received by the SS.
 - 6.3 The UE shall consider this random access response reception successful and transmit the msg3.
 - 6.4 The SS shall send NACK all UE msg3 following a successful random access response.
 - 6.5 The UE shall consider this contention resolution not successful then re-transmit the msg3 upon the reception of a NACK on msg3 until the maximum number of HARQ retransmission is reached.
- 7. Test 4: Correct behaviour when receiving an incorrect message over Temporary C-RNTI
 - 7.1 Repeat step 1-3.
 - 7.2 In Test 4, the UE shall send the preamble to the SS. The SS shall transmit a random access response containing a random access preamble identifier corresponding to the transmitted random access after first preambles have been received by the SS.
 - 7.3 The UE shall consider this random access response reception successful and transmit the msg3.
 - 7.4 The SS shall send a message addressed to the Temporary C-RNTI with a UE contention resolution identity included in the MAC control element not matching the CCCH SDU transmitted in msg3 uplink message.
 - 7.5 The UE shall consider the contention resolution not successful then re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires.
- 8. Test 5: Correct behaviour when receiving a correct message over Temporary C-RNTI
 - 8.1 Repeat step 1-3

- 8.2 In Test 5, the SS shall transmit a random access response containing a random access preamble identifier corresponding to the transmitted random access after the first preambles have been received by the SS.
- 8.3 The UE shall consider this random access response reception successful and transmit the msg3.
- 8.4 The SS shall send a message addressed to the Temporary C-RNTI with a UE contention resolution identity included in the MAC control element matching the CCCH SDU transmitted in the msg3 uplink message.
- 8.5 The UE shall send ACK and consider the contention resolution successful and the random access procedure successfully completed.
- 9. Test 6: Correct behaviour when contention resolution timer expires
 - 9.1 Repeat step 1-3.
 - 9.2 In Test 6, the UE shall send the preamble to the SS. The SS shall transmit a random access response containing a random access preamble identifier corresponding to the transmitted random access after the first preambles have been received by the SS.
 - 9.3 The UE shall consider this random access response reception successful and transmit the msg3.
 - 9.4 The SS shall send an ACK for msg3 but not send msg4 allowing the contention resolution timer to expire.
 - 9.5 The UE shall consider the contention resolution not successful then re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires.

6.2.3.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 6.2.3.4.3-1: Common Exception messages for E-UTRAN TDD -Contention Based Random Access test requirement

Default Message Contents	
Common contents of system information	
blocks exceptions	
Default RRC messages and information	Table H.3.2-2
elements contents exceptions	

Table 6.2.3.4.3-2: SystemInformationBlockType1: E-UTRAN TDD - Contention Based Random Access test requirement

Derivation Path: TS 36.508 [7] clause 4.4.3.2, Table 4.4.3.2-3 SystemInformationBlockType1					
Information Element Value/remark Comment Condition					
SystemInformationBlockType1 ::= SEQUENCE {					
p-Max	23 (dBm)				

Table 6.2.3.4.3-3: SystemInformationBlockType3: E-UTRAN TDD - Contention Based Random Access test requirement

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-2 SystemInformationBlockType3				
Information Element Value/remark Comment Condition				
SystemInformationBlockType3 ::= SEQUENCE {				
p-Max	23 (dBm)			

Table 6.2.3.4.3-4: RACH-ConfigCommon-DEFAULT: E-UTRAN TDD - Contention Based Random Access test requirement

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-12: RACH-ConfigCommon-DEFAULT			
Information Element	Value/remark	Comment	Condition
RACH-ConfigCommon-DEFAULT ::= SEQUENCE {			
preambleInfo SEQUENCE {			
numberOfRA-Preambles	n52		
}			
powerRampingParameters SEQUENCE {			
powerRampingStep	dB2		
preambleInitialReceivedTargetPower	dBm-120		
}			
}			

Table 6.2.3.4.3-5: PDSCH-ConfigCommon-DEFAULT: Additional E-UTRAN TDD - Contention Based Random Access test requirement

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-5: PDSCH-ConfigCommon-DEFAULT			
Information Element Value/remark Comment Condition			
PDSCH-ConfigCommon-DEFAULT ::= SEQUENCE {			
referenceSignalPower	-5 (dBm)		1TX

6.2.3.5 Test requirement

Tables 6.2.3.5-1 and 6.2.3.5-2 define the primary level settings for E-UTRAN TDD - contention based random access test. Table 6.2.3.5-5 defines the uplink timing error limit including test tolerances.

Table 6.2.3.5-1: Cell Specific Test requirement Parameters for E-UTRAN TDD - Contention Based Random Access test

E-UTRA RF Channel Number 1 1 10 10 10 10 10 10	Parameter	Unit	Value	Comments
OCNG Pattern DL. Reference Measurement Channel R.0 TDD As defined in D.2.1.	E-UTRA RF Channel Number		1	
DL Reference Measurement Channel R.0 TDD	BW _{channel}	MHz	10	
Channel R.0 TDD	OCNG Pattern		OP.1 TDD	As defined in D.2.1.
DL Reference Measurement Channel R.6 TDD	PDSCH parameters		DL Reference Measurement	As defined in A.1.2.
Darameters Channel R.6 TDD	·		Channel R.0 TDD	
Special subframe	PCFICH/PDCCH/PHICH		DL Reference Measurement	As defined in A.2.2.
Configuration			Channel R.6 TDD	
Uplink-downlink configuration		-	6	
PBCH_RA				
PBCH_RA	Uplink-downlink configuration	-	1	
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$				in 3GPP TS 36.211[9].
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$				
SSS_RA				
PCFICH_RB				
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$				
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$				
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$			_	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$			0	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$				
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$				
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$				
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	PDSCH_RB			
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	OCNG_RA			
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$				
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	\hat{E}_{s}/I_{ot}		3	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	N_{oc}	dBm/15 KHz	-98	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	\hat{E}/N	dB	3	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	lo Note 2	dBm/9 MHz	-65.5	
referenceSignalPowerdBm/15 KHz-5As defined in clause $6.3.2$ in 3GPP TS 36.331 [5].Configured UE transmitted power ($P_{\rm CMAX}$)dBm23As defined in clause $6.2.5$ in 3GPP TS 36.101 [2].PRACH Configuration Index-53As defined in table $5.7.1-3$ in 3GPP TS 36.211 [9].Back off Parameter Index-2As defined in table $7.2-1$ in 3GPP TS 36.321 [11].	RSRP Note 3			
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	referenceSignalPower		•	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		dBm	23	
PRACH Configuration Index - 53 As defined in table 5.7.1-3 in 3GPP TS 36.211 [9]. Back off Parameter Index - 2 As defined in table 7.2-1 in 3GPP TS 36.321 [11].				in 3GPP TS 36.101 [2].
Back off Parameter Index - 2 As defined in table 7.2-1 in 3GPP TS 36.321 [11].		-	53	
	Back off Parameter Index	-	2	As defined in table 7.2-1
	Propagation Condition	-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: lo level has been derived from other parameters for information purpose. It is not a settable parameter.

Note 3: RSRP level has been derived from other parameters for information purposes. It is not a settable parameter.

Table 6.2.3.5-2: RACH-Configuration parameters for E-UTRAN TDD - Contention Based Random Access test

Field	Value	Comment	
numberOfRA-Preambles	n52		
sizeOfRA-PreamblesGroupA	n52	No group B.	
powerRampingStep	dB2	<u> </u>	
preambleInitialReceivedTargetPower	dBm-120		
preambleTransMax	n6		
ra-ResponseWindowSize	sf10	10 sub-frames	
mac-ContentionResolutionTimer	sf48	48 sub-frames	
maxHARQ-Msg3Tx	4		
Note: For further information see Section 6.3.2 in 3GPP TS 36.331[5].			

Test 1: Correct behaviour when receiving random access response reception

- The power of the first preamble shall be -30 dBm to within the accuracy specified in Table 6.2.3.5-3.
- The relative power for preamble ramping step shall be 2 dB to within the accuracy specified in Table 6.2.3.5-4.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 6.2.3.5-5.

Test 2: Correct behaviour when not receiving random access response reception

- The power of the first preamble shall be -30 dBm to within the accuracy specified in Table 6.2.3.5-3.
- The relative power for preamble ramping step shall be 2 dB to within the accuracy specified in Table 6.2.3.5-4.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 6.2.3.5-5.

Test 3: Correct behaviour when receiving a NACK on msg3

- The UE shall re-transmit the msg3 upon the reception of a NACK on msg3 until the maximum number of HARQ retransmission is reached.

Test 4: Correct behaviour when receiving an incorrect message over Temporary C-RNTI

- The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires unless the received message includes a UE contention resolution identity MAC control element and the UE contention resolution identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

Test 5: Correct behaviour when receiving a correct message over Temporary C-RNTI

- The UE shall send ACK if the contention resolution is successful.

Test 6: Correct behaviour when contention resolution timer expires

- The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires if the contention resolution timer expires.

Table 6.2.3.5-3: Absolute power tolerance for E-UTRAN TDD - Contention Based Random Access test

Tolerance		
Normal Extreme		
Conditions Conditions		
± 10.1 dB ± 31.1 dB		

allocations

Table 6.2.3.5-4: Relative power tolerance for E-UTRAN TDD - Contention Based Random Access test

power step size (Up or down)	PRACH		
	Normal Conditions Extreme Conditions		
ΔP [dB]	[dB]	[dB]	
2 ≤ ΔP < 3	± 3.7	± 5.7	
Note 1: For extreme conditions an additional ± 2.0 dB relaxation is allowed for PRACH			

Table 6.2.3.5-5: Test requirements for T_e Timing Error Limit for E-UTRAN TDD – Contention Based Random Access test

Downlink Bandwidth (MHz)	T _e	
≥3	15*T _S	
Note: T _S is the basic timing unit defined in TS 36.211 [9]		

6.2.4 E-UTRAN TDD - Non-Contention Based Random Access Test

6.2.4.1 Test purpose

To verify that the UE behaviour of the random access procedure is according to the E-UTRAN TDD non-contention based random access requirements in an AWGN model and that the PRACH power settings and timing are within the specified limits.

6.2.4.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

6.2.4.3 Minimum conformance requirements

The random access procedure is used when establishing the layer 1 communication between the UE and E-UTRAN. The random access is as defined in TS 36.213 [8] clause 6 and the control of the RACH transmission is as defined in TS 36.321 [11] clause 5.1.

The UE shall have capability to calculate PRACH transmission power according to the PRACH power formula as defined in TS 36.213 [8] clause 6.1 and apply this power level at the first preamble or additional preambles. The absolute power applied to the first preamble shall have an accuracy as defined in table 6.3.5.1.1-1 of TS 36.101 [2] clause 6.3.5.1.1. The relative power applied to additional preambles shall have an accuracy as specified in table 6.3.5.2.1-1 of TS 36.101 [2] clause 6.3.5.2.1.

The UE shall indicate a Random Access problem to upper layers if the maximum number of preambles transmission counter has been reached.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall re-transmit the preamble with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

The UE shall re-transmit the preamble with the calculated PRACH transmission power if no Random Access Response is received within the RA response window.

The normative reference for this requirement is TS 36.133 [4] clause 6.2.2.2 and A.6.2.4.

6.2.4.4 Test description

6.2.4.4.1 Initial conditions

Test Environment: Normal, TL/VL, TL/VH, TH/VL, TH/VH; as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A, Figure A.18.
- 2. Propagation conditions are set according to Annex B clause B. 0.
- 3. There is one E-UTRA TDD carrier and one cell specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

6.2.4.4.2 Test procedure

The test consists of a single cell. The UE has a downlink PDSCH allocated centred on the centre sub-carrier. The E-UTRAN shall signal a Random Access Preamble ID to the UE via a PDCCH order.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to Tables 6.2.4.5-1 and 6.2.4.5-2 as appropriate. Propagation conditions are set according to Annex B clause B.1.1.
- 3. The SS shall signal a Random Access Preamble ID via a PDCCH order to the UE and initiate a Non-contention based Random Access procedure.
- 4. Test 1: Correct behaviour when receiving Random Access Response
- 4.1. In Test 1, the UE shall send the signalled preamble to the SS. In response to the first 4 preambles, the SS shall transmit a random access response not corresponding to the transmitted random access preamble.
- 4.2 The UE shall consider the random access response reception not successful then re-select a preamble and transmit with the calculated PRACH transmission power if all received random access response contain random access preamble identifiers that do not match the transmitted random access preamble.
- 4.3 The SS shall transmit a random access response containing a random access preamble identifier corresponding to the transmitted random access after 5 preambles have been received by the SS.
- 4.4 The UE shall consider this random access response reception successful.
- 4.5 Measure the power and timing of the first preamble and it shall not exceed the values specified in Tables 6.2.4.5-3 and 6.2.4.5-5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in Tables 6.2.4.5-4 and 6.2.4.5-5.
- 5. Test 2: Correct behaviour when *not* receiving Random Access Response
- 5.1 Repeat step 1-3.
- 5.2 In Test 2, the UE shall send the signalled preamble to the SS. The SS shall not respond to the first 4 preamble.
- 5.3 The UE shall consider the random access response reception not successful then re-select a preamble and transmit with the calculated PRACH transmission power.
- 5.4 The SS shall transmit a random access response containing a random access preamble identifier corresponding to the transmitted random access after 5 preambles have been received by the SS.
- 5.5 The UE shall consider this random access response reception successful.
- 5.6 Measure the power and timing of the first preamble and it shall not exceed the values specified in clause Tables 6.2.4.5-3 and 6.2.4.5-5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in Tables 6.2.4.5-4 and 6.2.4.5-5.

6.2.4.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 6.2.4.4.3-1: Common Exception messages for E-UTRAN TDD - Non-Contention Based Random Access test requirement

Default Message Contents		
Common contents of system information blocks exceptions		
Default RRC messages and information elements contents exceptions	Table H.3.2-2	

Table 6.2.4.4.3-2: SystemInformationBlockType1: E-UTRAN TDD - Non-Contention Based Random Access test requirement

Derivation Path: TS 36.508 [7] clause 4.4.3.2, Table 4.4.3.2-3 SystemInformationBlockType1			
Information Element	Value/remark	Comment	Condition
SystemInformationBlockType1 ::= SEQUENCE {			
p-Max	23 (dBm)		

Table 6.2.4.4.3-3: RACH-ConfigCommon-DEFAULT: E-UTRAN TDD - Non-Contention Based Random Access test requirement

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-12 RACH-ConfigCommon-DEFAULT				
Information Element	Value/remark	Comment	Condition	
RACH-ConfigCommon-DEFAULT ::= SEQUENCE {				
preambleInfo SEQUENCE {				
numberOfRA-Preambles	n52			
preamblesGroupAConfig SEQUENCE {}	Not present			
}				
powerRampingParameters SEQUENCE {				
powerRampingStep	dB2			
preambleInitialReceivedTargetPower	dBm-120			
}	•			
)				

Table 6.2.4.4.3-4: PDSCH-ConfigCommon-DEFAULT: Additional E-UTRAN TDD - Non-Contention Based Random Access test requirement

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-5: PDSCH-ConfigCommon-DEFAULT				
Information Element Value/remark Comment Condition				
PDSCH-ConfigCommon-DEFAULT ::= SEQUENCE {				
referenceSignalPower	-5 (dBm)		1TX	

Table 6.2. 4.4.3-5: *PhysicalConfigDedicated-DEFAULT*: Additional E-UTRAN TDD - Non-Contention Based Random Access test requirement

Derivation Path: TS 36.508 [7] clause 4.8.2, Table 4.8.2.1.6-1 PhysicalConfigDedicated-DEFAULT			
Information Element	Value/remark	Comment	Condition
PhysicalConfigDedicated-DEFAULT ::= SEQUENCE {			
cqi-ReportConfig	CQI-ReportConfig-		RBC
	DEFAULT		
soundingRS-LU-ConfigDedicated	Not present		RBC

Table 6.2. 4.4.3-6: MAC-MainConfig-RBC: Additional E-UTRAN TDD - Non-Contention Based Random Access test requirement

Derivation Path: TS 36.508 [7] clause 4.8.2, Table 4.8.2.1.5-1 MAC-MainConfig-RBC			
Information Element	Value/remark	Comment	Condition
MAC-MainConfig-RBC ::= SEQUENCE {			
timeAlignmentTimerDedicated	Infinity		

6.2.4.5 Test requirement

Tables 6.2.4.5-1 and 6.2.4.5-2 define the primary level settings for E-UTRAN TDD - non-contention based random access test. Table 6.2.4.5-5 defines the uplink timing error limit including test tolerances.

Table 6.2.4.5-1: Cell Specific Test requirement Parameters for E-UTRAN TDD - Non-Contention Based Random Access test

Parameter	Unit	Value	Comments
E-UTRA RF Channel Number		1	
BW _{channel}	MHz	10	
OCNG Pattern		OP.1 TDD	As defined in D.2.1.
PDSCH parameters		DL Reference Measurement	As defined in A.1.2.
		Channel R.0 TDD	
PCFICH/PDCCH/PHICH		DL Reference Measurement	As defined in A.2.2.
parameters		Channel R.6 TDD	
Special subframe	-	6	As specified in table 4.2-1
configuration			in 3GPP TS 36.211[9].
Uplink-downlink configuration	-	1	As specified in table 4.2-2 in 3GPP TS 36.211[9].
PBCH_RA	dB		
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB	0	
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA Note 1	dB		
OCNG_RB Note 1	dB		
$\hat{\mathbf{E}}_{\mathrm{s}}/\mathbf{I}_{\mathrm{ot}}$	dB	3	
N_{oc}	dBm/15 KHz	-98	
\hat{E}_s/N_{oc}	dB	3	
lo Note 2	dBm/9 MHz	-65.5	
RSRP Note 3	dBm/15 KHz	-95	
referenceSignalPower	dBm/15 KHz	-5	As defined in clause 6.3.2 in 3GPP TS 36.331 [5].
Configured UE transmitted	dBm	23	As defined in clause 6.2.5
power ($P_{ m CMAX}$)			in 3GPP TS 36.101 [2].
PRACH Configuration Index	-	53	As defined in table 5.7.1-3 in 3GPP TS 36.211 [9].
Back off Parameter Index	-	2	As defined in table 7.2-1 in 3GPP TS 36.321 [11].
Propagation Condition	-	AWGN	• 1

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: lo level has been derived from other parameters for information purpose. It is not a settable parameter.

Note 3: RSRP level has been derived from other parameters for information purposes. It is not a settable parameter.

Table 6.2.4.5-2: RACH-Configuration parameters for E-UTRAN TDD – Non-Contention Based Random Access test

Field	Value	Comment
powerRampingStep	dB2	
preambleInitialReceivedTargetPower	dBm-120	
preambleTransMax	n6	
Ra-ResponseWindowSize	sf10	10 sub-frames
Note: For further information see Section 6.3.2 in 3GPP TS 36.331 [5].		

Test 1: Correct behaviour when receiving Random Access Response

- The power of the first preamble shall be -30 dBm to within the accuracy specified in Table 6.2.4.5-3.
- The relative power for preamble ramping step shall be 2 dB to within the accuracy specified in Table 6.2.4.5-4.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 6.2.4.5-5.

Test 2: Correct behaviour when not receiving Random Access Response

- The power of the first preamble shall be -30 dBm to within the accuracy specified in Table 6.2.4.5-3.
- The relative power for preamble ramping step shall be 2 dB to within the accuracy specified in Table 6.2.4.5-4.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 6.2.4.5-5.

Table 6.2.4.5-3: Absolute power tolerance for E-UTRAN TDD - Non-Contention Based Random Access test

Tolerance	
Normal Extreme	
Conditions	Conditions
± 10.1 dB	± 13.1 dB

Table 6.2.4.5-4: Relative power tolerance for E-UTRAN TDD - Non-Contention Based Random Access test

power step size (Up or down)	PRACH	
	Normal Conditions	Extreme Conditions
ΔP [dB]	[dB]	[dB]
$2 \le \Delta P < 3$ ± 3.7 ± 5.7		
Note 1: For extreme conditions an additional ± 2.0 dB relaxation is allowed for PRACH		

Note 1: For extreme conditions an additional ± 2.0 dB relaxation is allowed for PRACH allocations

Table 6.2.4.5-5: Test requirements for T_e Timing Error Limit for E-UTRAN TDD – Non-Contention Based Random Access test

Downlink Bandwidth (MHz)	T _e	
≥3	15*T _S	
Note: T _S is the basic timing unit defined in TS 36.211 [9]		

7 Timing and Signalling Characteristics

The timing requirements are applicable for the uplink physical channels and signals specified in TS 36.211 [9] clause 5 (for uplink physical channels) as defined.

SS transmits PDSCH via PDCCH DCI format 1A for C_RNTI to transmit the DL RMC according to Annex A1. The SS sends downlink MAC padding bits on the DL RMC.

Uplink is configured according to Annex A.3.

7.1 UE Transmit Timing

7.1.1 E-UTRAN FDD - UE Transmit Timing Accuracy

7.1.1.1 Test purpose

To verify the UE have the capability to follow the frame timing change of the connected System Simulator. The method used is that the UE initial transmit timing accuracy, the maximum amount of timing change in one adjustment, and the minimum and maximum adjustment rate are within the specified limits based on the requirements.

7.1.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

7.1.1.3 Minimum conformance requirements

The UE initial transmission timing error shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is defined in TS 36.133 [4] clause 7.1.2 and shown in table 7.1.1.3-1. This requirement applies when it is the first transmission in a DRX cycle for PUCCH, PUSCH and SRS or it is the PRACH transmission. The uplink frame transmission takes place $(N_{TA} + N_{TA \text{ offset}}) \times T_s$ before the reception of the first detected path (in time) of the corresponding downlink frame from the reference cell. The reference point for the UE initial transmit timing control requirement shall be the downlink timing minus $(N_{TA_Ref} + N_{TA \text{ offset}}) \times T_s$.

where:

$$N_{TA}$$
 is $0 \le N_{TA} \le 20512$

 N_{TA_Ref} is 0 for PRACH; $(N_{TA_Ref} + N_{TA \text{ offset}})$ (in T_s units) for other channels is the difference between UE transmission timing and the downlink timing immediately after when the last timing advance in TS 36.133 [4] clause 7.3 was applied. $N_{TA_Ref}(N_{TA_Ref} + N_{TA \text{ offset}})$ (in T_s units) for other channels is not changed until next timing advance is received.

 $N_{TA \, offset}$ is 0 for frame structure type 1 as defined in TS 36.211 [9] clause 8.1. T_S denotes the basic time unit. The size of various fields in the time domain is expressed as a number of time units $T_S = 1/(15000 \, \text{x} \, 2048)$ seconds.

Table 7.1.1.3-1: T_e Timing Error Limit

Downlink Bandwidth (MHz)	T _{e_}
1.4	24*T _S
≥3 12*T _S	
Note: T _S is the basic timing unit defined in TS 36.211 [9]	

When it is not the first transmission in a DRX cycle or there is no DRX cycle, and when it is the transmission for PUCCH, PUSCH and SRS transmission, the UE shall be capable of changing the transmission timing according to the received downlink frame except when the timing advance in TS 36.133 [4] clause 7.3 is applied. When the transmission timing error between the UE and the reference timing exceeds $\pm T_e$ the UE is required to adjust its timing to within $\pm T_e$. The reference timing shall be $(N_{TA Ref} + N_{TA offset}) \times T_s$ before the downlink timing.

All adjustments made to the UE uplink timing shall follow these rules:

- 1) The maximum amount of the magnitude of the timing change in one adjustment shall be Tq.
- 2) The minimum aggregate adjustment rate shall be $7 * \times T_S$ per second.
- 3) The maximum aggregate adjustment rate shall be T_q per 200 ms.

Where the maximum autonomous time adjustment step T_q is defined in TS 36.133 [4] clause 7.1.2 and shown in table 7.1.1.3-2.

Table 7.1.1.3-2: T_q Maximum Autonomous Time Adjustment Step

Downlink Bandwidth (MHz)	$T_{q_{-}}$
1.4	16*T _S
3	8*T _S
5	4*T _S
≥10 2*T _S	
Note: T _S is the basic timing unit defined in TS 36.211 [9]	

The normative reference for this requirement is TS 36.133 [4] clause 7.1 and A.7.1.1.

NOTE 1: Due to the fact that the UE can update its timing at any interval, including just less than 200 ms, when evaluating the maximum adjustment rate in any 200 ms period an additional 2 * Ts uncertainty must be allowed for since there exists the possibility of two timing adjustments during the evaluation period.

NOTE 2: The minimum adjustment rate of 7 * T_S per second is only to be evaluated from the end of the received downlink frame until the UE has converged on the new reference cell.

7.1.1.4 Test description

7.1.1.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz and 1.4 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A, Figure A.18.
- 2. Propagation conditions are set according to Annex B clause B. 0.
- 3. There is one E-UTRA FDD carrier and one cell specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

7.1.1.4.2 Test procedure

The test consists of a single cell. The transmit timing accuracy is verified related to the downlink frame timing of Cell 1. The downli4.3.1.nk timing of Cell 1 is changed and the changes in UE transmit timing are observed. The transmit timing is verified by the UE transmitting SRS (Sounding Reference Symbols) used as a measurement reference facilitating the SS timing estimation.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to Test 1, Test 2, or Test 3 in Tables 7.1.1.5-1, 7.1.1.5-2 and 7.1.1.5-3 as appropriate. Propagation conditions are set according to Annex B clause B.1.1.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. After a connection is set up with Cell 1, the SS shall check that the UE transmit timing offset is within the limits specified in Table 7.1.1.5-4 with respect to the first detected path (in time) of the corresponding downlink frame of Cell 1.
- 6. The SS adjusts the downlink timing for Cell 1 to a delay of $+64 \times T_S$ (approximately $+2 \mu s$) for ≥ 3 MHz downlink bandwidth (Test 1, Test 2) and a delay of $+128 \times T_S$ (approximately $+4 \mu s$) for 1.4MHz downlink bandwidth (Test 3) compared to that in step 5.
- 7. Step 7 applies for Test 1 and Test 3, but is omitted for Test 2. The SS shall check that the maximum time adjustment step size T_q is within Rule 1 as specified in clause 7.1.1.5, the minimum adjustment rate is within Rule 2 as specified in clause 7.1.1.5, and the maximum adjustment rate is within Rule 3 as specified in clause

- 7.1.1.5. The three rules apply until the UE transmit timing offset is within the limits specified in Table 7.1.1.5-4 with respect to the first detected path (in time) of the corresponding downlink frame of Cell 1.
- 8 .The SS shall check that the UE transmit timing offset stays within the limits specified in Table 7.1.1.5-4 with respect to the first detected path (in time) of the corresponding downlink frame of Cell 1.
- 9. Repeat step 1-8 for each sub-test in Tables 7.1.1.5-1, 7.1.1.5-2 and 7.1.1.5-3 as appropriate.

7.1.1.4.3 Message contents

Table 7.1.1.4.3-1: Common Exception messages for UE transmit timing accuracy for E-UTRAN FDD test requirement

Default Message Contents	
Common contents of system information	
blocks exceptions	
Default RRC messages and information	Table H.3.4-2
elements contents exceptions	

Table 7.1.1.4.3-2: SoundingRS-RL-ConfigCommon-DEFAULT: Additional UE transmit timing accuracy for E-UTRAN FDD test requirement

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-21 SoundingRS-UL-ConfigCommon-DEFAULT			
Information Element	Value/remark	Comment	Condition
SoundingRS-UL-ConfigCommon-DEFAULT ::=			
SEQUENCE {			
setup SEQUENCE {			
srs-BandwidthConfig		Set according to specific test; bw5 for Test 1 and Test 2 and bw7 for Test 3	
srs-SubframeConfig		Set according to specific test; sc1 for Test 1 and Test 3 and sc3 for Test 2	FDD
ackNackSRS-SimultaneousTransmission	FALSE		
srsMaxUpPts }	Not present		FDD

Table 7.1.1.4.3-3: SoudingRS-UL-ConfigDedicated-DEFAULT: Additional UE transmit timing accuracy for E-UTRAN FDD test requirement

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-22 SoundingRS-UL-ConfigDedicated-DEFAULT			
Information Element	Value/remark	Comment	Condition
SoundingRS-UL-ConfigDedicated-DEFAULT ::=			
CHOICE {			
setup SEQUENCE {			
srs-Bandwidth	bw0	bw0 used with no	
		frequency hopping.	
		bw3 used with	
		frequency hopping	
srs-HoppingBandwidth	hbw0		
freqDomainPosition	0		
duration	TRUE	Indefinite duration	
srs-ConfigIndex		Set according to	
		specific test; 0 for	
		Test 1 and 77 for	
		Test 2 and 0 for	
		Test 3	
transmissionComb	0		
cyclicShift	cs0	No cyclic shift	
}			
}			

Table 7.1.1.4.3-4: MAC-MainConfig-RBC: Additional UE transmit timing accuracy for E-UTRAN FDD test requirement

Derivation Path: TS 36.508 [7] clause 4.8.2.1.5, Table 4.8.2.1.5-1 MAC-MainConfig-RBC			
Information Element	Value/remark	Comment	Condition
MAC-MainConfig-RBC ::= SEQUENCE {			
dl-SCH-Config SEQUENCE {}	Not present		
ul-SCH-Config SEQUENCE {			
maxHARQ-Tx	n5		
periodicBSR-Timer	sf20		
retxBSR-Timer	sf1280		
ttiBundling	FALSE		
}			
drx-Config CHOICE {			DRX_S
setup SEQUENCE {			
onDurationTimer	psf1		
drx-InactivityTimer	psf1		
drx-RetransmissionTimer	sf1		
longDRX-CycleStartOffset CHOICE {		sf80 typical value in simulations	
sf80	0		
}			
shortDRX	Not present		
}			
}			

Table 7.1.1.4.3-5: CQI-ReportConfig-DEFAULT: Additional UE transmit timing accuracy for E-UTRAN FDD test requirement

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-2 CQI-ReportConfig-DEFAULT			
Information Element	Value/remark	Comment	Condition
CQI-ReportConfig-DEFAULT ::= SEQUENCE {			
cqi-ReportModeAperiodic	rm30		
nomPDSCH-RS-EPRE-Offset	0		
cqi-ReportPeriodic CHOICE {			
release	NULL		
}			

Table 7.1.1.4.3-6: MAC-MainConfig-RBC: Additional UE transmit timing accuracy for E-UTRAN FDD test requirement

Derivation Path: TS 36.508 [7] clause 4.8.2, Table 4.8.2.1.5-1 MAC-MainConfig-RBC			
Information Element	Value/remark	Comment	Condition
MAC-MainConfig-RBC ::= SEQUENCE {			
timeAlignmentTimerDedicated	Infinity		

7.1.1.5 Test requirement

Tables 7.1.1.5-1, 7.1.1.5-2 and 7.1.1.5-3 define the primary settings including test tolerances for UE transmit timing accuracy for E-UTRAN FDD test.

Tables 7.1.1.5-4, 7.1.1.5-5 and the rules for adjustments made to the UE uplink timing include Test Tolerances.

Table 7.1.1.5-1: Cell Specific Test requirement Parameters for UE transmit timing accuracy for E-UTRAN FDD test case

Donomotor	l la it		Value	
Parameter	Unit	Test 1	Test 2	Test 3
E-UTRA RF Channel Number		1	1	1
Channel Bandwidth (BW _{channel})	MHz	10	10	1.4
DRX cycle	Ms	OFF	80 ^{Note5}	OFF
PDCCH/PCFICH/PHICH				
Reference measurement channel Note1		R.6 FDD	R.6 FDD	R.8 FDD
OCNG Pattern ^{Note2}		OP.2 FDD	OP.2 FDD	OP.4 FDD
PBCH_RA				
PBCH_RB				
PSS_RA				
SSS_RA				İ
PCFICH_RB				
PHICH_RA	dB	0	0	0
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N_{oc}	dBm/15 kHz	-98	-98	-98
$\hat{E}_{\scriptscriptstyle \mathrm{s}}/I_{\scriptscriptstyle \mathrm{ot}}$	dB	3.30	3.30	3.30
\hat{E}_s/N_{oc}	dB	3.30	3.30	3.30
lo ^{Note4}	dBm/9 MHz	-65.25	-65.25	N/A
10	dBm/1.08 MHz	N/A	N/A	-74.46
Propagation condition	-	AWGN	AWGN	AWGN

Note 1: For the reference measurement channels, see section A.2.1.

Note 2: For the OCNG pattern, see section D.1.2.

Note 3: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 4: lo level has been derived from other parameters for information purpose. It is not a

settable parameter.

Note 5: DRX related parameters are defined in Table 7.1.1.5-3.

Table 7.1.1.5-2: Sounding Reference Symbol Configuration to be used in UE transmit timing accuracy for E-UTRAN FDD test case

Field	Test 1	Test 2	Test 3	Comment
rieiū		Value		
srs-BandwidthConfig	bw5	bw5	bw7	
srs-SubframeConfig	sc1	sc3	sc1	
ackNackSRS- SimultaneousTransmission	FALSE	FALSE	FALSE	
srsMaxUpPts	N/A	N/A	N/A	Not applicable for FDD
srs-Bandwidth	0	0	0	No hopping
srs-HoppingBandwidth	hbw0	hbw0	hbw0	
freqDomainPosition	0	0	0	
duration	TRUE	TRUE	TRUE	Indefinite duration
srs-ConfigIndex	0	77	0	SRS periodicity of 2ms and 80 ms for Test 1 and 2, respectively.
transmissionComb	0	0	0	
cyclicShift	cs0	cs0	cs0	No cyclic shift
Note: For further information see section 6.3.2 in 3GPP TS 36.331 [5].				

Table 7.1.1.5-3: DRX Configuration to be used in UE transmit timing accuracy for E-UTRAN FDD test

Field	Test2	Comment	
rieid	Value		
onDurationTimer	psf1		
drx-InactivityTimer	psf1		
drx-RetransmissionTimer	sf1		
longDRX-CycleStartOffset	sf80		
shortDRX	disable		
Note: For further information see section 6.3.2 in 3GPP TS 36.331 [5].			

The UE transmit timing offset shall be within the requirements in Table 7.1.1.5-4.

The reference point for the UE initial transmit timing control test requirement shall be the downlink timing minus $(N_{\text{TA},\text{Ref}} + N_{\text{TA},\text{offset}}) \times T_{\text{s}}$.

Table 7.1.1.5-4: Test requirement for T_e Timing Error Limit

Downlink Bandwidth (MHz)	T _{e_}	
1.4	27*T _S	
≥3 15*T _S		
Note: T _S is the basic timing unit defined in TS 36.211 [9]		

The UE shall be capable of changing the transmission timing according to the received downlink frame. When the transmission timing error between the UE and the reference cell exceeds $\pm T_e$ the UE is required to adjust its timing to within $\pm T_e$.

All adjustments made to the UE uplink timing shall follow these rules:

- 1) The maximum adjustment step size T_q shall be within the requirements in Table 7.1.1.5-5
- 2) The minimum aggregate adjustment rate shall be $6.5\times T_{\text{S}}$ per second
- 3) The maximum aggregate adjustment rate shall be T_q per 200 ms, with T_q as defined in Table 7.1.1.5-5

Table 7.1.1.5-5: Test requirement for T_q Maximum Autonomous Time Adjustment Step

Downlink Bandwidth (MHz)	$T_{q_{-}}$	
1.4	16.5*T _S	
≥10 2.5*T _S		
Note: T _S is the basic timing unit defined in TS 36.211 [9]		

An illustration of the measurement principle is shown in Figure 7.1.1.5-1.

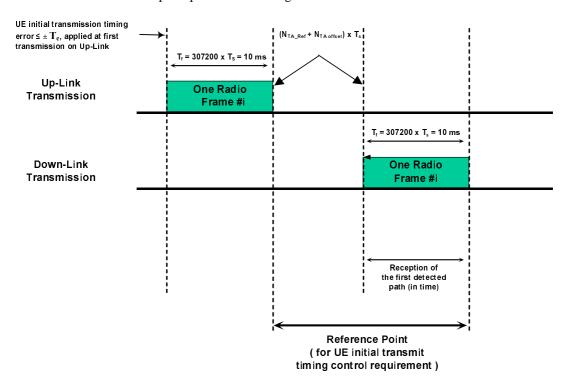


Figure 7.1.1.5-1: Illustration of measurement principle

7.1.2 E-UTRAN TDD - UE Transmit Timing Accuracy

7.1.2.1 Test purpose

To verify the UE have the capability to follow the frame timing change of the connected System Simulator. The method used is that the UE initial transmit timing accuracy, the maximum amount of timing change in one adjustment, and the minimum and maximum adjustment rate are within the specified limits based on the requirements.

7.1.2.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

7.1.2.3 Minimum conformance requirements

The UE initial transmission timing error shall be less than or equal to $\pm T_e$ where the timing error limit value T_e as defined in table 7.1.2-1 of TS 36.133 [4] clause 7.1.2. This requirement applies when it is the first transmission in a DRX cycle for PUCCH, PUSCH and SRS or it is the PRACH transmission. The uplink frame transmission takes place $(N_{\text{TA}} + N_{\text{TA offset}}) \times T_s$ before the reception of the first detected path (in time) of the corresponding downlink frame from the reference cell. The reference point for the UE initial transmit timing control requirement shall be the downlink timing minus $(N_{\text{TA Ref}} + N_{\text{TA offset}}) \times T_s$.

where:

 N_{TA} is $0 \le N_{TA} \le 20512$

 N_{TA_Ref} is 0 for PRACH; $N_{(N_{TA_Ref} + N_{TA offset})}$ (in T_s units) for other channels is the difference between UE transmission timing and the downlink timing immediately after when the last timing advance in TS 36.133 [4] clause 7.3 was applied. N_{TA_Ref} in T_s units) for other channels is not changed until next timing advance is received.

 $N_{TA~offset}$ is 624 for frame structure type 2 as defined in TS 36.211 [9] clause 8.1. T_S denotes the basic time unit. The size of various fields in the time domain is expressed as a number of time units $T_S = 1/(15000~x~2048)$ seconds.

When it is not the first transmission in a DRX cycle or there is no DRX cycle, and when it is the transmission for PUCCH, PUSCH and SRS transmission, the UE shall be capable of changing the transmission timing according to the received downlink frame except when the timing advance in TS 36.133 [4] clause 7.3 is applied. When the transmission timing error between the UE and the reference timing exceeds $\pm T_e$ the UE is required to adjust its timing to within $\pm T_e$. The reference timing shall be $(N_{TA Ref} + N_{TA offset}) \times T_s$ before the downlink timing.

All adjustments made to the UE uplink timing $(N_{\text{TA}} + N_{\text{TA offset}}) \times T_{\text{s}}$ shall follow these rules:

- 1) The maximum amount of the magnitude of the timing change in one adjustment shall be T_q
- 2) The minimum aggregate adjustment rate shall be $7 \times T_S$ per second.
- 3) The maximum aggregate adjustment rate shall be T_q per 200 ms.

Where the maximum timing error value T_e is specified in table 7.1.2.3-1 and maximum autonomous time adjustment step T_q is specified in table 7.1.2.3-2.

The normative reference for this requirement is TS 36.133 [4] clause 7.1 and A.7.1.2.

Table 7.1.2.3-1: T_e Timing Error Limit

Downlink Bandwidth (MHz)	T _{e_}	
1.4	24*T _S	
≥3	12*T _S	
Note: T _S is the basic timing unit defined in TS 36.211		

Table 7.1.2.3-2: T_q Maximum Autonomous Time Adjustment Step

Downlink Bandwidth (MHz)	T _{q_}	
1.4	16*T _S	
3	8*T _S	
5	4*T _S	
≥10	2*T _S	
Note: T _S is the basic timing unit defined in TS 36.211		

NOTE 1: Due to the fact that the UE can update its timing at any interval, including just less than 200 ms, when evaluating the maximum adjustment rate in any 200 ms period an additional $2*T_q$ uncertainty must be allowed for since there exists the possibility of two timing adjustment during the evaluation period.

NOTE 2: The minimum adjustment rate of $7 \times T_S$ per second is only to be evaluated from the end of the received downlink frame until the UE has converged on the new reference cell.

7.1.2.4 Test description

7.1.2.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and

Channel Bandwidth to be tested: 10 MHz and 1.4 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noises source to the UE antenna connectors as shown in TS 36.508 [7] Annex A, Figure A.18.
- 2. Propagation conditions are set according to Annex B clause B.0.
- 3. There is one E-UTRA TDD carrier and one cell specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

7.1.2.4.2 Test procedure

The test consists of a single cell. The transmit timing accuracy is verified related to the downlink frame timing of Cell 1. The downlink timing of Cell 1 is changed and the changes in UE transmit timing are observed. The transmit timing is verified by the UE transmitting SRS (Sounding Reference Symbols) used as a measurement reference facilitating the SS timing estimation.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to Test 1, Test 2, or Test 3 in Tables 7.1.2.5-1 and 7.1.2.5-2 and 7.1.2.5-3 as appropriate. Propagation conditions are set according to Annex B clause B.1.1.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. After a connection is set up with Cell 1, the SS shall check that the UE transmit timing offset is $624 \times T_S$ to within the T_e limits specified in Table 7.1.2.5-4 with respect to the first detected path (in time) of the corresponding downlink frame of Cell 1.
- 6. The SS adjusts the downlink timing for Cell 1 to a delay of $+64 \times T_S$ (approximately $+2 \mu s$) for ≥ 3 MHz downlink bandwidth (Test 1, Test 2) and a delay of $+128 \times T_S$ (approximately $+4 \mu s$) for 1.4MHz downlink (Test 3) bandwidth compared to that in step 5.
- 7. Step 7 applies for Test 1 and Test 3, but is omitted for Test 2. The SS shall check that the maximum time adjustment step size T_q is within Rule 1 as specified in clause 7.1.2.5, the minimum adjustment rate is within Rule 2 as specified in clause 7.1.2.5, and the maximum adjustment rate is within Rule 3 as specified in clause 7.1.2.5. The three rules apply until the UE transmit timing offset is $(624 \times T_s)$ to within the limits specified in Table 7.1.2.5-4 with respect to the first detected path (in time) of the corresponding downlink frame of Cell 1.
- 8. The SS shall check that the UE transmit timing offset stays at $624 \times T_S$ to within the T_e limits specified in Table 7.1.2.5-4 with respect to the first detected path (in time) of the corresponding downlink frame of Cell 1.
- 9. Repeat step 1-8 for each sub-test in Tables 7.1.2.5-1, 7.1.2.5-2 and 7.1.2.5-3 as appropriate.

7.1.2.4.3 Message contents

Table 7.1.2.4.3-1: Common Exception messages for UE transmit timing accuracy for E-UTRAN FDD test requirement

Default Message Contents	
Common contents of system information	
blocks exceptions	
Default RRC messages and information	Table H.3.4-2
elements contents exceptions	

Table 7.1.2.4.3-2: SoundingRS-UL-ConfigCommon-DEFAULT: Additional UE transmit timing for E-UTRAN TDD test requirement

Derivation Path: 36.508 clause 4.6.3			
Information Element	Value/remark	Comment	Condition
SoundingRsUl-ConfigCommon-DEFAULT ::=			
SEQUENCE {			
setup SEQUENCE {			
srs-BandwidthConfig		Set according to specific test; bw5 for Test 1 and Test 2, bw7 for Test 3	
srs-SubframeConfig	src3		TDD
ackNackSRS-SimultaneousTransmission	FALSE		
srsMaxUpPts	FALSE		
[}			

Table 7.1.2.4.3-3: SoundingRS-UL-ConfigDedicated-DEFAULT: Additional UE transmit timing for E-UTRAN TDD test requirement

Value/remark	Comment	Condition
bw0	bw0 used with no frequency hopping. bw3 used with frequency hopping	
hbw0		
0		
TRUE	indefinite duration	
	Set according to specific test; 0 for Test 1 and 77 for Test 2	
0		
cs0	No cyclic shift	
	bw0 hbw0 0 TRUE	bw0 bw0 used with no frequency hopping. bw3 used with frequency hopping hbw0 0 TRUE indefinite duration Set according to specific test; 0 for Test 1 and 77 for Test 2

Table 7.1.2.4.4-3: MAC-MainConfig-RBC: Additional UE transmit timing for E-UTRAN TDD test requirement

Derivation Path: 36.508 clause 4.8.2			
Information Element	Value/remark	Comment	Condition
MAC-MainConfig-RBC ::= SEQUENCE {			
dl-SCH-Config SEQUENCE {}	Not present		
ul-SCH-Config SEQUENCE {			
maxHARQ-Tx	n5		
periodicBSR-Timer	sf20		
retxBSR-Timer	sf1280		
ttiBundling	FALSE		
}			
drx-Config CHOICE {			pc_FeatrGrp _5 AND DRX_S
setup SEQUENCE {			
onDurationTimer	psf1		
drx-InactivityTimer	psf1		
drx-RetransmissionTimer	sf1		
longDRX-CycleStartOffset CHOICE {		sf80 typical value in simulations	
sf80	0		
}			
shortDRX	Not present		
}			
}			

Table 7.1.2.4.3-5: CQI-ReportConfig-DEFAULT: Additional UE transmit timing accuracy for E-UTRAN TDD test requirement

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-2 CQI-ReportConfig-DEFAULT			
Information Element	Value/remark	Comment	Condition
CQI-ReportConfig-DEFAULT ::= SEQUENCE {			
cqi-ReportModeAperiodic	rm30		
nomPDSCH-RS-EPRE-Offset	0		
cqi-ReportPeriodic CHOICE {			
release	NULL		
}			

Table 7.1.2.4.3-6: *MAC-MainConfig-RBC*: Additional UE transmit timing accuracy for E-UTRAN TDD test requirement

Derivation Path: TS 36.508 [7] clause 4.8.2, Table 4.8.2.1.5-1 MAC-MainConfig-RBC				
Information Element	Value/remark	Comment	Condition	
MAC-MainConfig-RBC ::= SEQUENCE {				
timeAlignmentTimerDedicated	Infinity			

7.1.2.5 Test requirement

Tables 7.1.2.5-1, 7.1.2.5-2 and 7.1.2.5-3 define the primary settings including test tolerances for UE transmit timing for E-UTRAN TDD test.

Table 7.1.2.5-1: Test Parameters for UE Transmit Timing Accuracy Tests for E-UTRAN TDD

Parameter	Unit		Value	
Parameter	Unit	Test 1	Test 2	Test 3
E-UTRA RF Channel Number		1	1	1
Channel Bandwidth (BW _{channel})	MHz	10	10	1.4
DRX cycle	Ms	OFF	80 ^{Note7}	OFF
PDCCH/PCFICH/PHICH				
Reference measurement channel Note3		R.6 TDD	R.6 TDD	R.8 TDD
OCNG Pattern ^{Note4}		OP.2 TDD	OP.2 TDD	OP.4 TDD
PBCH_RA				
PBCH_RB	1			
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA	dB	0	0	0
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N_{oc}	dBm/15 kHz	-98	-98	-98
\hat{E}_{s}/I_{ot}	dB	3.30	3.30	3.30
\hat{E}_s/N_{oc}	dB	3.30	3.30	3.30
lo ^{Note6}	dBm/9 MHz	-65.25	-65.25	N/A
IO	dBm/1.08 MHz	N/A	N/A	-74.46
Propagation condition	-	AWGN	AWGN	AWGN

Note 1: For the special subframe configuration see table 4.2-1 in 3GPP TS 36.211

Note 6: lo level has been derived from other parameters for information purpose. It is not a settable parameter.

Note 7: DRX related parameters are defined in Table 7.1.2.5-3.

Note 2: For the uplink-downlink configuration see table 4.2-2 in 3GPP TS 36.211

Note 3: For the reference measurement channels, see section A.2.2.

Note 4 For the OCNG pattern, see section D.2.2(for 10MHz) and D.2.4(for 1.4MHz).

Note 5: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Table 7.1.2.5-2: Sounding Reference Signal Configuration to be used in UE Transmit Timing Accuracy Tests for E-UTRAN TDD

Field	Test 1	Test 2	Tset3	Comment
srsBandwidthConfiguration	bw5	bw5	bw7	
srsSubframeConfiguration	sc3	sc3	sc3	Once every 5 subframes
ackNackSrsSimultaneousTra nsmission	FALSE	FALSE	FALSE	, ,
srsMaxUpPTS	FALSE	FALSE	FALSE	
srsBandwidth	0	0	0	No hopping
srsHoppingBandwidth	hbw0	hbw0	hbw0	
frequencyDomainPosition	0	0	0	
duration	TRUE	TRUE	TRUE	Indefinite duration
Srs-ConfigurationIndex	15	85	15	SRS periodicity of 10 and 80 ms for Test 1 and 2, respectively.
transmissionComb	0	0	0	
cyclicShift	cs0	cs0	cs0	No cyclic shift
Note: For further information see section 6.3.2 in 3GPP TS 36.331.				

Table 7.1.2.5-3: DRX Configuration to be used in UE Transmit Timing Accuracy Test 2 for E-UTRAN TDD

Field	Test2	Comment	
Field	Value		
onDurationTimer	psf1		
drx-InactivityTimer	psf1		
drx-RetransmissionTimer	sf1		
longDRX-CycleStartOffset	sf80		
shortDRX	disable		
Note: For further information see section 6.3.2 in 3GPP TS 36.331.			

The UE transmit timing offset shall be within the requirements in Table 7.1.2.5-4.

The reference point for the UE initial transmit timing control test requirement shall be the downlink timing minus $(N_{\text{TA_Ref}} + N_{\text{TA offset}}) \times T_{\text{s}}$ seconds.

Table 7.1.2.5-4: Test requirement for T_e Timing Error Limit

Downlink Bandwidth (MHz)	T _{e_}	
1.4	27*T _S	
≥3 15*T _S		
Note: T _S is the basic timing unit defined in TS 36.211 [9]		

The UE shall be capable of changing the transmission timing according to the received downlink frame. When the transmission timing error between the UE and the reference cell exceeds $\pm T_e$ seconds the UE is required to adjust its timing to within $\pm T_e$ seconds.

All adjustments made to the UE uplink timing shall follow these rules:

- 1) The maximum adjustment step size T_q shall be within the requirements in Table 7.1.2.5-5
- 2) The minimum aggregate adjustment rate shall be $6.5\times T_{\text{S}}$ per second
- 3) The maximum aggregate adjustment rate shall be T_q per 200 ms, with T_q as defined in Table 7.1.2.5-5

Table 7.1.2.5-5: Test requirement for T_q Maximum Autonomous Time Adjustment Step

Downlink Bandwidth (MHz)	T _{q_}	
1.4	16.5*T _S	
≥10 2.5*T _S		
Note: T _S is the basic timing unit defined in TS 36.211 [9]		

An illustration of the measurement principle is shown in Figure 7.1.2.5-4.

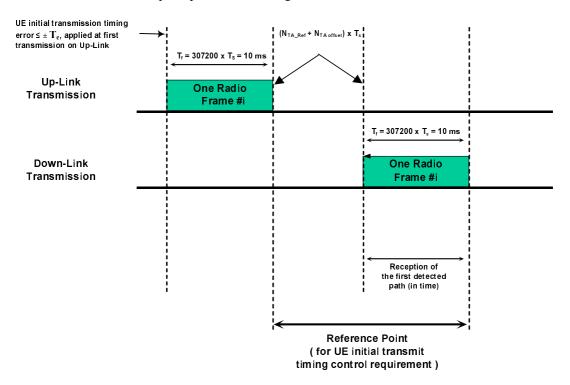


Figure 7.1.2.5-4: Illustration of measurement principle

7.2 UE Timing Advance

7.2.1 E-UTRAN FDD - UE Timing Advance Adjustment Accuracy

7.2.1.1 Test purpose

To verify the UE in RRC_CONNECTED state adjusts the timing of its transmissions with accuracy by meeting the E-UTRAN FDD timing advance adjustment requirements in an AWGN model.

7.2.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

7.2.1.3 Minimum conformance requirements

The timing advance is initiated from E-UTRAN with MAC message that implies and adjustment of the timing advance according to TS 36.321 [11] clause 5.2.

The UE shall adjust the timing of its uplink transmission timing at sub-frame n+6 for a timing advancement command received in sub-frame n.

The UE shall adjust the timing of its transmission with a relative accuracy better than or equal to $\pm 4 \times T_S$ seconds to the signalled timing advance value compared to the timing of preceding uplink transmission. The timing advance command is expressed in multiple of $16 \times T_S$ and is relative to the current uplink timing.

In case of random access response, 11-bit timing advance command, T_A , indicates N_{TA} values by index values of T_A = 0, 1, 2, ..., 1282, where an amount of the time alignment is given by N_{TA} = $T_A \times 16$ according to TS 36.213 [8] clause 4.2.3. N_{TA} is defined in TS 36.211 [9].

In other cases, 6-bit timing advance command, T_A , indicates adjustment of the current N_{TA} value, $N_{TA,old}$, to the new N_{TA} value, $N_{TA,new}$, by index values of $T_A = 0$, 1, 2,..., 63, where $N_{TA,new} = N_{TA,old} + (T_A - 31) \times 16$ according to TS 36.213 [8] clause 4.2.3. Adjustment of N_{TA} value by a positive or a negative amount indicates advancing or delaying the uplink transmission timing by a given amount respectively.

For UE timers, the UE shall comply with the timer accuracies according to TS 36.133 [4] table 7.2.2-1. The requirements are only related to the actual timing measurements internally in the UE.

The normative reference for this requirement is TS 36.133 [4] clause 7.3 and A.7.2.1.

7.2.1.4 Test description

7.2.1.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A, Figure A.18.
- 2. The general test parameter settings are set according to Table 7.2.1.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B. 0.
- 4. There is one E-UTRA FDD carrier and one cell specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 7.2.1.4.1-1: General Test Parameters for E-UTRAN FDD - UE timing advance adjustment accuracy test case

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference Measurement Channel R.0 FDD	As specified in section A.1.1
PCFICH/PDCCH/PHICH parameters		DL Reference Measurement Channel R.6 FDD	As specified in section A.2.1
Timing Advance Command (<i>T_A</i>) value during T1		31	N _{TA} = 0 for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (<i>T_A</i>) value during T2		39	$N_{TA} = 128$
DRX		OFF	
T1	S	5	
T2	S	5	

7.2.1.4.2 Test procedure

The test consists of a single cell. The test consists of two successive time periods, with time durations of T1 and T2 respectively. In each time period, timing advance commands are sent to the UE and SRS are sent from the UE and received by the SS. By measuring the reception of the SRS, the transmit timing, and hence the timing advance

adjustment accuracy, can be measured. The UE Time Alignment Timer (timeAlignmentTimer IE), defined in TS 36.321 [11] clause 5.2, shall be configured so that it does not expire in the duration of the test.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Tables 7.2.1.5-1 and 7.2.1.5-2. Propagation conditions are set according to Annex B clause B.1.1.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. SS shall transmit one message with a timing advance command, T_A . The timing advance command, T_A , shall be set to 31 which indicate adjustment of the current N_{TA} value. The timing advance adjustment during T1 shall be $N_{TA} = 0$.
- 6. The UE shall transmit SRS and adjust its uplink timing at the beginning of sub-frame n+6 for a timing advance command T_A received in sub-frame n. Sub-frame n is the sub-frame where the UE received the time advance command.
- 7. When T1 expires, the SS shall switch the timing advance command (T_A) from T1 to T2 as specified in Table 7.2.1.5-1.
- 8. SS shall transmit a sequence of messages with timing advance command, T_A . The timing advance command, T_A , shall be set to 39 which indicate adjustment of the current N_{TA} value. The timing advance adjustment during T2 shall be $N_{TA} = 128$.
- 9. The UE shall transmit SRS and adjust its uplink timing at the beginning of sub-frame n+6 for a timing advance command T_A received in sub-frame n. Sub-frame n is the sub-frame where the UE received the time advance command.
- 10. The result from the SRS and adjustment of the timing advance in step 9) is used to measure that the UE adjusts the timing of its transmission with a relative accuracy better than or equal to \pm 4.5 \times T_S to the signalled timing advance value compared to the timing of preceding uplink transmission.
- 11. If the UE adjust the timing of its transmission within a relative accuracy greater than or equal to $\pm 4.5 \times T_S$ to the signalled timing advance value compared to the timing of preceding uplink transmission then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 12. Repeat step 1-11 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.2.1.4.3 Message contents

Table 7.2.1.4.3-1: Common Exception messages for E-UTRAN FDD - UE timing advance adjustment accuracy test requirement

Default Message Contents		
Common contents of system information		
blocks exceptions		
Default RRC messages and information	Table H.3.4-2	
elements contents exceptions		

Table 7.2.1.4.3-2: SoundingRS-UL-ConfigCommon-DEFAULT: Additional E-UTRAN FDD - UE timing advance adjustment accuracy test requirement

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6	Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-21 SoundingRS-UL-ConfigCommon-DEFAULT				
Information Element	Value/remark	Comment	Condition		
SoundingRS-UL-ConfigCommon-DEFAULT ::= SEQUENCE {					
setup SEQUENCE {					
srs-BandwidthConfig	bw5	Channel- bandwidth- dependent parameter			
srs-SubframeConfig	sc3		FDD		
ackNackSRS-SimultaneousTransmission	FALSE				
srsMaxUpPts	Not present		FDD		
}					

Table 7.2.1.4.3-3: SoundingRSUL-ConfigDedicated-DEFAULT: Additional E-UTRAN FDD - UE timing advance adjustment accuracy test requirement

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-22 SoundingRS-UL-ConfigDedicated-DEFAULT				
Information Element	Value/remark	Comment	Condition	
SoundingRS-UL-ConfigDedicated-DEFAULT ::=				
CHOICE {				
setup SEQUENCE {				
srs-Bandwidth	bw0	bw0 used with no		
		frequency hopping.		
		bw3 used with		
		frequency hopping		
srs-HoppingBandwidth	hbw0			
freqDomainPosition	0			
duration	TRUE	Indefinite duration		
srs-ConfigIndex	7	SRS periodicity of	FDD	
		10		
transmissionComb	0			
cyclicShift	cs0	No cyclic shift		
}				
}				

Table 7.2.1.4.3-4: MAC-MainConfig-RBC: Additional E-UTRAN FDD - UE timing advance adjustment accuracy test requirement

Derivation Path: TS 36.508 [7] clause 4.8.2.1.5, Table 4.8.2.1.5-1 MAC-MainConfig-RBC				
Information Element	Value/remark	Comment	Condition	
MAC-MainConfig-RBC ::= SEQUENCE {				
dl-SCH-Config SEQUENCE {}	Not present			
ul-SCH-Config SEQUENCE {				
maxHARQ-Tx	n5			
periodicBSR-Timer	sf20			
retxBSR-Timer	sf1280			
ttiBundling	FALSE			
}				
timeAlignmentTimerDedicated	Infinity			

7.2.1.5 Test requirement

Tables 7.2.1.4.1-1, 7.2.1.5-1 and 7.2.1.5-2 define the primary level settings for E-UTRAN FDD - UE timing advance adjustment accuracy test.

Table 7.2.1.5-1: Cell Specific Test requirement Parameters for E-UTRAN FDD - UE timing advance adjustment accuracy test case

Parameter	Unit	Value		
		T1	T2	
E-UTRA RF Channel Number		1		
BW _{channel}	MHz	10		
OCNG Patterns defined in D.1.1		OP.1 F	DD	
(OP.1 FDD)				
PBCH_RA	dB			
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB	0		
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA Note1	dB			
OCNG_RB Note1	dB			
Timing Advance Command (T _A)		31	39	
$\hat{\mathbf{E}}_{\mathrm{s}}/\mathbf{I}_{\mathrm{ot}}$	dB	3		
N_{oc}	dBm/15 KHz	-98		
\hat{E}_s/N_{oc}	dB	3		
Io ^{Note2}	dBm/9 MHz	-65.		
Propagation Condition		AWG	SN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: lo level has been derived from other parameters for information purpose. It is not a settable parameter.

Table 7.2.1.5-2: Sounding Reference Symbol Configuration to be used in E-UTRAN FDD - UE timing advance adjustment accuracy test case

Field	Value	Comment			
srs-BandwidthConfig	bw5				
srs-SubframeConfig	sc3	Once every 5 subframes			
ackNackSRS-	FALSE				
SimultaneousTransmission	TALOL				
srsMaxUpPts	N/A	Not applicable for E-UTRAN FDD			
srs-Bandwidth	0	No hopping			
srs-HoppingBandwidth	hbw0				
freqDomainPosition	0				
duration	TRUE	Indefinite duration			
srs-ConfigIndex	7	SRS periodicity of 10.			
transmissionComb	0				
cyclicShift	cs0	No cyclic shift			
Note: For further information see section 6.3.2 in 3GPP TS 36.331 [15].					

The UE shall apply the signalled Timing Advance value to the transmission timing at the designated activation time i.e. 6 sub-frames after the reception of the timing advance command.

The UE shall adjust the timing of its transmission with a relative accuracy better than or equal to $\pm 4.5 \times T_S$ seconds to the signalled timing advance value compared to the timing of preceding uplink transmission. This requirement includes test tolerances.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

7.2.2 E-UTRAN TDD - UE Timing Advance Adjustment Accuracy

7.2.2.1 Test purpose

The purpose of the test is to verify E-UTRAN TDD Timing Advance adjustment accuracy requirements, in an AWGN model.

7.2.2.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

7.2.2.3 Minimum conformance requirements

The timing advance is initiated from E-UTRAN with MAC message that implies and adjustment of the timing advance according to TS 36.321 [11] clause 5.2.

The UE shall adjust the timing of its uplink transmission timing at sub-frame n+6 for a timing advancement command received in sub-frame n.

The UE shall adjust the timing of its transmission with a relative accuracy better than or equal to $\pm 4 \times T_S$ seconds to the signalled timing advance value compared to the timing of preceding uplink transmission. The timing advance command is expressed in multiple of $16 \times T_S$ and is relative to the current uplink timing.

In case of random access response, 11-bit timing advance command, T_A , indicates N_{TA} values by index values of T_A = 0, 1, 2, ..., 1282, where an amount of the time alignment is given by N_{TA} = $T_A \times 16$ according to TS 36.213 [8] clause 4.2.3. N_{TA} is defined in TS 36.211 [9].

In other cases, 6-bit timing advance command, T_A , indicates adjustment of the current N_{TA} value, $N_{TA,old}$, to the new N_{TA} value, $N_{TA,new}$, by index values of $T_A = 0$, 1, 2,..., 63, where $N_{TA,new} = N_{TA,old} + (T_A - 31) \times 16$ according to TS 36.213 [8] clause 4.2.3. Adjustment of N_{TA} value by a positive or a negative amount indicates advancing or delaying the uplink transmission timing by a given amount respectively.

For UE timers, the UE shall comply with the timer accuracies according to TS 36.133 [4] table 7.2.2-1. The requirements are only related to the actual timing measurements internally in the UE.

The normative reference for this requirement is TS 36.133 [4] clause 7.3 and A.7.2.2.

7.2.2.4 Test description

7.2.2.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noises source to the UE antenna connectors as shown in TS 36.508 [7] Annex A, Figure A.18.
- 2. The general test parameter settings are set according to Table 7.2.2.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. There is one E-UTRA TDD carrier and one cell specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 7.2.2.4-1 General Test Parameters for E-UTRAN TDD Timing Advance Accuracy Test

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference Measurement Channel R.0 TDD	As specified in section A.1.2
PCFICH/PDCCH/PHICH parameters		DL Reference Measurement Channel R.6 TDD	As specified in section A.2.2
Timing Advance Command (T_A) value during T1		31	N _{TA} = 0 for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	N _{TA} = 128
DRX		OFF	
T1	S	5	
T2	S	5	

7.2.2.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands are sent to the UE and Sounding Reference Signals (SRS), are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured. The UE Time Alignment Timer (timeAlignmentTimer IE), defined in TS 36.321 [11] clause 5.2, shall be configured so that it does not expire in the duration of the test.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Tables 7.2.2.5-1, 7.2.2.5-2 and 7.2.2.5-3. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. SS shall transmit one message with a timing advance command, T_A . The timing advance command, T_A , shall be set to 31 which indicate adjustment of the current N_{TA} value. The timing advance adjustment during T1 shall be $N_{TA} = 0$.
- 6. The UE shall transmit SRS and adjust its uplink timing from the beginning of sub-frame n+6 for a timing advance command T_A received in sub-frame n. Sub-frame n is the sub-frame where the UE receive the time advance command.
- 7. When T1 expires, the SS shall switch the timing advance command (T_A) from T1 to T2 as specified in Table 7.2.1.5-1.
- 8. SS shall transmit a sequence of messages with timing advance command, T_A . The timing advance command, T_A , shall be set to 39 which indicate adjustment of the current N_{TA} value. The timing advance adjustment during T2 shall be $N_{TA} = 128$.
- 9. The UE shall transmit SRS and adjust its uplink timing from the beginning of sub-frame n+6 for a timing advance command T_A received in sub-frame n. Sub-frame n is the sub-frame where the UE receive the time advance command.
- 10. The timing of the first SRS transmission after sub-frame n+6 and adjustment of the timing advance in step 9) is used to measure that the UE adjusts the timing of its transmission with a relative accuracy better than or equal to $\pm 4.5 \times T_S$ to the signalled timing advance value compared to the timing of preceding uplink transmission.
- 11. If the UE adjust the timing of its transmission within a relative accuracy greater than or equal to $\pm 4.5 \times T_S$ to the signalled timing advance value compared to the timing of preceding uplink transmission then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
- 12. Repeat step 1-11 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.2.2.4.3 Message contents

Table 7.2.2.4.3-1: Common Exception messages for E-UTRAN TDD - UE timing advance adjustment accuracy test requirement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-2

Table 7.2.2.4.3-2: SoundingRS-UL-ConfigCommon-DEFAULT: Additional UE transmit timing for E-UTRAN TDD test requirement

Information Element	Value/remark	Comment	Condition
SoundingRSUL-ConfigCommon-DEFAULT ::=			
SEQUENCE {			
setup SEQUENCE {			
srs-BandwidthConfig	bw5	Channel- bandwidth- dependent parameter	
srs-SubframeConfig	src3		TDD
ackNackSRS-SimultaneousTransmission	FALSE		
srsMaxUpPts	FALSE		
}			

Table 7.2.2.4.3-3: SoundingRS-UL-ConfigDedicated-DEFAULT: Additional UE transmit timing for E-UTRAN TDD test requirement

Derivation Path: 36.508 clause 4.6.3			
Information Element	Value/remark	Comment	Condition
SoundingRSUL-ConfigDedicated-DEFAULT ::=			
CHOICE {			
enable SEQUENCE {			
srsBandwidth	bw0	bw0 used with no frequency hopping. bw3 used with frequency hopping	
srsHoppingBandwidth	hbw0		
freqDomainPosition	0		
duration	TRUE	Indefinite duration	
srs-ConfigIndex	7	SRS periodicity of 10	
transmissionComb	0		
cyclicShift }	cs0	No cyclic shift	
}			

Table 7.2.1.4.3-4: MAC-MainConfig-RBC: Additional E-UTRAN TDD - UE timing advance adjustment accuracy test requirement

Derivation Path: 36.508 clause 4.8.2			
Information Element	Value/remark	Comment	Condition
MAC-MainConfig-RBC ::= SEQUENCE {			
dl-SCH-Config SEQUENCE {}	Not present		
ul-SCH-Config SEQUENCE {			
maxHARQ-Tx	n5		
periodicBSR-Timer	sf20		
retxBSR-Timer	sf1280		
ttiBundling	FALSE		
}			
timeAlignmentTimerDedicated	infinity		

7.2.2.5 Test requirement

Tables~7.2.2.4.1-1,~7.2.2.5-1~and~7.2.2.5-2~define~the~primary~level~settings~for~E-UTRAN~TDD~-~UE~timing~advance~adjustment~accuracy~test.

Table 7.2.2.5-1 Cell specific Test Parameters for E-UTRAN TDD Timing Advance Accuracy Test

Parameter	Unit		Value		
		T1	T2		
E-UTRA RF Channel Number		1			
BW _{channel}	MHz	10			
Special subframe configuration Note1			6		
Uplink-downlink configuration Note2			1		
OCNG Patterns defined in D.2.1			OP.1 TDD		
(OP.1 TDD)					
PBCH_RA	dB				
PBCH_RB	dB				
PSS_RA	dB				
SSS_RA	dB				
PCFICH_RB	dB				
PHICH_RA	dB				
PHICH_RB	dB		0		
PDCCH_RA	dB				
PDCCH_RB	dB				
PDSCH_RA	dB				
PDSCH_RB	dB				
OCNG_RA ^{Note3}	dB				
OCNG_RB ^{Note3}	dB				
Timing Advance Command (T _A)		31	39		
$[\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}]$	dB	3			
N_{oc}	dBm/15 KHz	-98			
\hat{E}_s/N_{oc}	dB	3			
Io ^{Note4}	dBm/9 MHz		-65.5		
Propagation Condition			AWGN		

Note 1: For the special subframe configuration see table 4.2-1 in 3GPP TS 36.211.

Note 2: For the uplink-downlink configuration see table 4.2-2 in 3GPP TS 36.211.

Note 3: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 4: lo level has been derived from other parameters for information purpose. It is not a settable parameter.

Table 7.2.2.5-2:Sounding Reference Symbol Configuration for E-UTRAN TDD Transmit Timing Accuracy Test

Field	Value	Comment
srsBandwidthConfiguration	bw5	
srsSubframeConfiguration	sc3	Once every 5 subframes
ackNackSrsSimultaneousTransmission	FALSE	
srsMaxUpPTS	N/A	
srsBandwidth	bw0	No hopping
srsHoppingBandwidth	hbw0	
frequencyDomainPosition	0	
Duration	TRUE	Indefinite duration
Srs-ConfigurationIndex	15	SRS periodicity of 10ms.
transmissionComb	0	
cyclicShift	cs0	No cyclic shift
Note: For further information see sect	ion 6.3.2 in 3G	SPP TS 36.331.

The UE shall apply the signalled Timing Advance value to the transmission timing at the designated activation time i.e. 6 sub frames after the reception of the timing advance command.

The UE shall adjust the timing of its transmissions with an relative accuracy better than or equal to $\pm 4.5 \times T_S$ seconds to the signalled timing advance value compared to the timing of preceding uplink transmission. This requirement includes test tolerances.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

7.3 Radio Link Monitoring

Editor's note: The test cases of subclause 7.3 are incomplete. The following aspects are either missing or not yet determined:

• Minimum requirements in TS 36.133 [4] are not yet completed and still under investigation in RAN4

7.3.1 E-UTRAN FDD Radio Link Monitoring Test for Out-of-sync

7.3.1.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink radio link quality of the serving cell. This test will partly verify the E-UTRAN FDD radio link monitoring requirements in TS 36.133 section 7.6.

7.3.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

7.3.1.3 Minimum conformance requirements

When the downlink radio link quality estimated over the last 200 ms period becomes worse than the threshold Q_{out} , Layer 1 of the UE shall send an out-of-sync indication to the higher layers within 200 ms Q_{out} evaluation period. A Layer 3 filter shall be applied to the out-of-sync indications as specified in TS 36.331 [5] clause 5.5.3.2.

The out-of-sync and in-sync evaluations shall be performed as specified in section 4.2.1 in TS 36.213 [8]. Two successive indications from Layer 1 shall be separated by at least 10 ms.

The transmitter power shall be turned off within 40 ms after expiry of T310 timer as specified in TS 36.331 [5] section 5.3.11.

The normative reference for this requirement is TS 36.133 [4] clause 7.6.2 and A.7.3.1.

7.3.1.4 Test description

The test consists of four subtests with one cell configured; the difference between the subtests is the number of transmitter antennas and the propagation channel. Each subtest consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 7.3.1.4-1 shows the three different time durations and the corresponding variation of the downlink SNR in the active cell to emulate out-of-sync states.

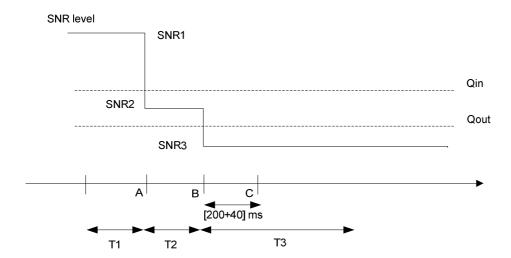


Figure 7.3.1.4-1: SNR variation for out-of-sync testing

7.3.1.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

1. Connect the SS (node B emulator) and AWGN noise sources or faders to the UE antenna connectors as stated below.

For subtest 1:As Shown in TS 36.508 [7] Annex A figure A.9 (without using the faders).

For subtest 2: As Shown in TS 36.508 [7] Annex A figure A.10 (without using the faders).

For subtest 3: As Shown in TS 36.508 [7] Annex A figure A.9

For subtest 4: As Shown in TS 36.508 [7] Annex A figure A.10

- 2. The general test parameter settings for the different subtests are set up according to Table 7.3.1.4-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 7.3.1.4.3
- 5. There is one cell specified in this test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 7.3.1.4.1-1: General test parameters for E-UTRAN FDD out-of-sync testing

Pa	rameter	Unit		Va	lue		Comment	
			Test 1	Test 2	Test 3	Test 4	1	
PCFICH/PDC parameters	CH/PHICH		R.6 FDD	R.7 FDD	R.6 FDD	R.7 FDD	As specified in section A.2.1 None of the PDCCH are intended for the UE under test	
OCNG param	neters		OP.2 FDD	OP.2 FDD	OP.2 FDD	OP.2 FDD	As specified in section D.1.2.	
Active cell			Cell 1	Cell 1	Cell 1	Cell 1	Cell 1 is on E-UTRA RF channel number 1	
CP length			Normal	Normal	Normal	Normal		
	Channel Number		1	1	1	1	One E-UTRA FDD carrier frequency is used.	
(BW _{channel})	nnel Bandwidth	MHz	10	10	10	10		
Correlation M Configuration			1x2 Low	2x2 Low	1x2 Low	2x2 Low	Correlation Matrix and Antenna Configuration are defined in TS 36.521-1 [10] Annex B.2.3.2	
Out of sync transmission	DCI format		1A	1A	1A	1A	As defined in section 5.3.3.1.4 in TS 36.212	
parameters (Note 1)	Number of Control OFDM symbols		2	2	2	2	Out of sync threshold Qout and the corresponding	
	Aggregation level	CCE	8	8	8	8	hypothetical	
	ρ _A , ρ _B		0	-3	0	-3	PDCCH/PCFICH	
	Ratio of PDCCH to RS EPRE	dB	4	1	4	1	transmission parameters are as	
	Ratio of PCFICH to RS EPRE	dB	4	1	4	1	specified in TS 36.133 in section 7.6.1 and Table 7.6.1-1 respectively.	
DRX			OFF	OFF	OFF	OFF		
Layer 3 filterir	ng		Enabled	Enabled	Enabled	Enabled	Counters: N310 = 1; N311 = 1	
T310 timer		ms	0	0	0	0	T310 is disabled	
T311 timer		ms	1000	1000	1000	1000	T311 is enabled	
	reporting mode		PUCCH 1-0	PUCCH 1-0	PUCCH 1-0	PUCCH 1-0	As defined in table 7.2.2-1 in TS 36.213.	
CQI reporting	periodicity	ms	2	2	2	2	Minimum CQI reporting periodicity	
Propagation of	channel		AWGN	AWGN	ETU 70 Hz	ETU 70 Hz		
T1		S	1	1	1	1		
T2		S	0.4	0.4	0.4	0.4		
T3		S	0.5	0.5	0.5	0.5		

Note 1: PDCCH/PCFICH corresponding to the out of sync transmission parameters need not be included in the Reference Measurement Channel.

7.3.1.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CQI reporting in PUCCH 1-0 mode with a reporting periodicity of 2 ms.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 7.3.1.5-1 for subtest 1 and 2 and according to T1 in Table and 7.3.1.5-2 for subtest 3 and 4. Propagation conditions are set according to Annex B clause B.1.1 for subtests 1 and 2 and according to B.2.2 for subtests 3 and 4. T1 starts.
- 3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.3.1.5-1 for subtests 1 and 2 and according to T2 in Table 7.3.1.5-2 for subtests 3 and 4. T2 starts.
- 4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 7.3.1.5-1 for subtests 1 and 2 and according to T3 in Table 7.3.1.5-2 for subtests 3 and 4. T3 starts.
- 5. If the SS stops receiving CQI reports within 240 ms from the start of T3 the number of successful tests is increased by one, otherwise the number of failed tests is increased by one.
- 6. When T3 expires the SS shall change the SNR value to T1 as specified in Table 7.3.1.5-1 for subtests 1 and 2 and Table 7.3.1.5-2 for subtests 3 and 4.
- 7. If the UE has not re-established the connection in at least 1s, the UE is switched off and then on. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 8. Repeat steps 2-7 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.3.1.4.3 Message contents

Table 7.3.1.4.3-1: Common Exception messages for E-UTRAN FDD Radio Link Monitoring Test for Out-of-sync

Default Message Contents	
Common contents of system information	
blocks exceptions	
Default RRC messages and information	Table H.2.4-1
elements contents exceptions	

Table 7.3.1.4.3-2: CQI-ReportConfig-DEFAULT: Additional E-UTRAN FDD Radio Link Monitoring Test for Out-of-sync

Derivation Path: 36.331 clause 6.3.2			
Information Element	Value/remark	Comment	Condition
CQI-ReportConfig-DEFAULT ::= SEQUENCE {			
cqi-ReportPeriodic	ON		
cqi-ReportPeriodic ::= CHOICE {			CQI_PERIOD IC
setup SEQUENCE {			
cqi-PUCCH-ResourceIndex	0		
cqi-pmi-ConfigIndex	0	(see Table 7.2.2- 1A in TS 36.213)	
cqi-FormatIndicatorPeriodic CHOICE {			
widebandCQI	NULL		
}			
ri-ConfigIndex	483	(see Table 7.2.2- 1B in TS 36.213)	
simultaneousAckNackAndCQI	FALSE	BOOLEAN	
}			
}			
}			

Condition	Explanation
CQI_PERIODIC	When periodic CQI reporting should be enabled

Table 7.3.1.4.3-3: *PhysicalConfigDedicated-DEFAULT:* Additional E-UTRAN FDD Radio Link Monitoring Test for Out-of-sync test 2 and 4 requirements

Derivation Path: 36.331 clause 6.3.2			
Information Element	Value/remark	Comment	Condition
PhysicalConfigDedicated-DEFAULT ::= SEQUENCE {			
antennalnfo CHOICE {			
defaultValue	NULL		2TX
}			
}			

Table 7.3.1.4.3-4: MAC-MainConfig-RBC: E-UTRAN FDD Radio Link Monitoring Test for Out-of-sync

Derivation Path: TS 36.508 [7] clause 4.8.2.1.5, Table 4.8.2.1.5-1 MAC-MainConfig-RBC					
Information Element Value/remark Comment Condition					
timeAlignmentTimerDedicated	Infinity				

7.3.1.5 Test requirement

Table 7.3.1.5-1: Cell specific test parameters for E-UTRAN FDD (cell # 1) for out-of-sync radio link monitoring tests # 1 and # 2

Parameter	Unit	Test 1				Test 2	
		T1	T2	T3	T1	T2	T3
E-UTRA RF Channel			1			1	•
Number							
BW _{channel}	MHz		10			10	
Correlation Matrix and			1x2 Low			2x2 Low	
Antenna Configuration							
OCNG Pattern defined			OP.2 FDD			OP2 FDD	
in D.1 (FDD)			OP.2 FDD			OP2 FDD	
ρ_A , ρ_B			0			-3	
PCFICH_RB	dB		4			1	
PDCCH_RA	dB		0		-3		
PDCCH_RB	dB		0			-3	
PBCH_RA	dB						
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PHICH_RA	dB		0		-3		
PHICH_RB	dB		U		-3		
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA ^{Note 1}	dB						
OCNG RB ^{Note 1}	dB						
SNR Note 6	dB	-4.1	-8.9	-14.1	-4.3	-8.9	-14.1
N_{oc}	dBm/15 kHz	-98				-98	
Propagation condition			AWGN			AWGN	

- Note 1: OCNG shall be used such that the resources in cell # 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: The uplink resources for CQI reporting are assigned to the UE prior to the start of time period T1.
- Note 3: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
- Note 4: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
- Note 5: SNR levels correspond to the signal to noise ratio over the cell-specific reference signal
- Note 6: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure 7.3.1.4-1.

Table 7.3.1.5-2: Cell specific test parameters for E-UTRAN FDD (cell # 1) for out-of-sync radio link monitoring tests # 3 and # 4

Parameter	Unit		Test 3			Test 4	
		T1	T2	T3	T1	T2	T3
E-UTRA RF Channel			1	l.		1	
Number							
BW _{channel}	MHz		10		10		
Correlation Matrix and			1x2 Low			2x2 Low	
Antenna Configuration							
OCNG Pattern defined			OP.2 FDD			OP.2 FDD	
in D.1 (FDD)							
ρ_A , ρ_B			0			-3	
PCFICH_RB	dB		4			1	
PDCCH_RA	dB		0			-3	
PDCCH_RB	dB		0			-3	
PBCH_RA	dB						
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PHICH_RA	dB						
PHICH_RB	dB		0		-3		
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG RA ^{Note 1}	dB						
OCNG RB ^{Note 1}	dB						
SNR Note 6	dB	-0.6	-4.7	-12.3	-1.4	-5.3	-13.1
			•	•		•	•
N_{oc}	dBm/15 kHz		-98			-98	
Propagation condition			ETU 70 Hz			ETU 70 Hz	
		that the resources in cell # 1 are fully allocated and a constant ectral density is achieved for all OFDM symbols.					
	sources for CQI reporting are assigned to the UE prior to the start of time						
	d layer 3 filteri	ng related	parameters	s are confiç	gured prior	to the star	of time
	ntains PDCCH	for UEs o	ther than th	ne device u	nder test a	as part of O	CNG.
	orrespond to th						
REs.	•	· ·			•		_
NISTS ON THE OND SEA		T0 1 T		0.104	ONIDO	LONIDO	

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

respectively in figure 7.3.1.4-1.

During time duration T1 and T2 the UE shall continuously report CQI according to the configured CQI mode (PUCCH 1-0) with a periodicity of 2 ms.

The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3

The UE shall stop reporting the CQI within 240 ms from the start of the time duration T3.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

7.3.2 E-UTRAN FDD Radio Link Monitoring Test for In-sync

7.3.2.1 Test purpose

Note 6:

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink radio link quality of the serving cell. This test will partly verify the E-UTRAN FDD radio link monitoring requirements in TS 36.133 section 7.6.

7.3.2.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

7.3.2.3 Minimum conformance requirements

When the downlink radio link quality estimated over the last 100 ms period becomes better than the threshold Q_{in} , Layer 1 of the UE shall send an in-sync indication to the higher layers within 100 ms Q_{in} evaluation period. A L3 filter shall be applied to the in-sync indications as specified in TS 36.331 [5] clause 5.5.3.2.

The out-of-sync and in-sync evaluations shall be performed as specified in section 4.2.1 in TS 36.213 [8]. Two successive indications from Layer 1 shall be separated by at least 10 ms.

The transmitter power shall be turned off within 40 ms after expiry of T310 timer as specified in TS 36.331[5] section 5.3.11.

The normative reference for this requirement is TS 36.133 [4] clause 7.6.2 and A.7.3.2.

7.3.2.4 Test description

The test consists of two subtests with one cell configured; the difference between the subtests is the number of transmitter antennas. Each subtest consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 7.3.2.4-1 shows the different time durations and the corresponding variation of the downlink SNR in the active cell to emulate in-sync states.

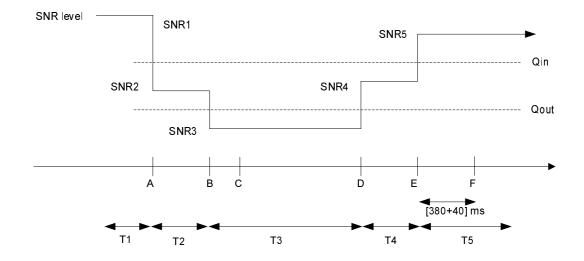


Figure 7.3.2.4-1: SNR variation for in-sync testing

7.3.2.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- For subtest 1 (one transmitter antenna): Connect the SS (node B emulator) and faders, to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.9.
 For subtest 2 (two transmitter antennas): Connect the SS (node B emulator) and faders, to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.10.
- 2. The general test parameter settings for the different subtest are set up according to Table 7.3.2.4.1-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.

- 4. Message contents are defined in clause 7.3.2.4.3.
- 5. There is one cell specified in this test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 7.3.2.4.1-1: General test parameters for E-UTRAN FDD in-sync testing

Parameter		Unit	Val	ue	Comment
			Test 1	Test 2	
PCFICH/PDC	CH/PHICH		R.6 FDD	R.7 FDD	As specified in section
parameters					A.2.1
					None of the PDCCH are
					intended for the UE
OCNG param	atars		OP.2 FDD	OP.2 FDD	under test As specified in section
OONO param	Corto parametero		01 .2 1 00	01.2100	D.1.2.
Active cell			Cell 1	Cell 1	Cell 1 is on E-UTRA RF
					channel number 1
CP length			Normal	Normal	
E-UTRA RF C	Channel Number		1	1	One E-UTRA FDD
					carrier frequency is used.
F-UTRA Char	nnel Bandwidth	MHz	10	10	useu.
(BW _{channel})	inci Banawiatii	1011 12	10	10	
	atrix and Antenna		1x2 Low	2x2 Low	Correlation Matrix and
Configuration					Antenna Configuration
					are defined in TS
					36.521-1 [10] Annex B.2.3.2
In sync	DCI format		1C	1C	As defined in section
transmission	Dorionnat		.0		5.3.3.1.4 in TS 36.212
parameters	Number of		2	2	In sync threshold Qin
(Note 1)	Control OFDM				and the corresponding
	symbols				hypothetical
	Aggregation level	CCE	4	4	PDCCH/PCFICH transmission
	ρα, ρε		0	-3 -3	parameters are as
	Ratio of PDCCH to RS EPRE		0	-3	specified in TS 36.133
	Ratio of PCFICH		4	1	section and Table 7.6.1-
	to RS EPRE				2 respectively.
Out of sync	DCI format		1A	1A	As defined in section
transmission					5.3.3.1.3 in TS 36.212
parameters	Number of		2	2	Out of sync threshold
(Note 1)	Control OFDM symbols				Q _{out} and the corresponding
	Aggregation level	CCE	8	8	hypothetical
	ρ_A , ρ_B	OOL	0	-3	PDCCH/PCFICH
	Ratio of PDCCH	dB	4	1	transmission
	to RS EPRE				parameters are as
	Ratio of PCFICH	dB	4	1	specified in TS 36.133 section 7.6.1 and Table
	to RS EPRE				7.6.1-1 respectively.
DRX			OFF	OFF	
Layer 3 filterin	ng		Enabled	Enabled	Counters:
					N310 = 1; N311 = 1
T310 timer		ms	2000	2000	T310 is enabled
T311 timer		ms	1000	1000	T311 is enabled
Periodic CQI	Periodic CQI reporting mode		PUCCH 1-0	PUCCH 1-0	As defined in table 7.2.2-1 in TS 36.213.
CQI reporting	periodicity	ms	2	2	Minimum CQI reporting
CQI reporting periodicity		5	_	_	periodicity
Propagation of	Propagation channel		ETU 70 Hz	ETU 70 Hz	
T1		S	0.5	0.5	
T2		S	0.4	0.4	
T3		S	1.36	1.36	
T4		S	0.4	0.4	
T5	CCU/DCEICU	S	1	1	yne transmission
	CCH/PCFICH corre ameters need not b				
pai	amotora need not b	o monuc	aca in the Nele	nonios ivicasui	omont onainet.

7.3.2.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CQI reporting in PUCCH 1-0 mode with a reporting periodicity of 2 ms.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 7.3.2.5-1 for subtests 1 and 2 respectively. Propagation conditions are set according to Annex B.2.2. T1 starts.
- 3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.3.2.5-1. T2 starts.
- 4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 7.3.2.5-1. T3 starts.
- 5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 7.3.2.5-1. T4 starts.
- 6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 7.3.2.5-1. T5 starts.
- 7. If the SS stops receiving CQI reports before point F (420 ms after the start of time duration T5) in Figure 7.3.2.4-1 the number of failed tests is increased by one, otherwise the number of successful tests is increased by one.
- 8. Repeat steps 2-7 for both subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.3.2.4.3 Message contents

Table 7.3.2.4.3-1: Common Exception messages for E-UTRAN FDD Radio Link Monitoring Test for insync

Default Message Contents		
Common contents of system information		
blocks exceptions		
Default RRC messages and information	Table H.2.4-2	
elements contents exceptions		

Table 7.3.2.4.3-2: CQI-ReportConfig-DEFAULT: Additional E-UTRAN FDD Radio Link Monitoring Test for in-sync

Derivation Path: 36.331 clause 6.3.2			
Information Element	Value/remark	Comment	Condition
CQI-ReportConfig-DEFAULT ::= SEQUENCE {			
cqi-ReportPeriodic	ON		
cqi-ReportPeriodic CHOICE {			CQI_PERIOD IC
setup SEQUENCE {			
cqi-PUCCH-ResourceIndex	0		
cqi-pmi-ConfigIndex	0	(see Table 7.2.2- 1A in TS 36.213)	
cqi-FormatIndicatorPeriodic CHOICE {			
widebandCQI	NULL		
}			
ri-ConfigIndex	483	(see Table 7.2.2- 1B in TS 36.213)	
simultaneousAckNackAndCQI	FALSE	BOOLEAN	
}			
}			
}			

Condition Expla	lanation
-----------------	----------

CQI_PERIODIC	When periodic CQI reporting should be enabled
ICUI FERIODIC	IMITED PERIODIC CONTESPONDIO SHOULD BE ENABLED

Table 7.3.2.4.3-3: *PhysicalConfigDedicated-DEFAULT:* Additional E-UTRAN FDD Radio Link Monitoring Test for in-sync test 2 requirement

Derivation Path: 36.331 clause 6.3.2			
Information Element	Value/remark	Comment	Condition
PhysicalConfigDedicated-DEFAULT ::= SEQUENCE {			
antennaInfo CHOICE {			
defaultValue	NULL		2TX
}			
}			

Table 7.3.2.4.3-4: MAC-MainConfig-RBC: E-UTRAN FDD Radio Link Monitoring Test for in-sync

Derivation Path: TS 36.508 [7] clause 4.8.2.1.5, Table 4.8.2.1.5-1 MAC-MainConfig-RBC						
Information Element	Value/remark	Comment	Condition			
timeAlignmentTimerDedicated	Infinity					

7.3.2.5 Test requirement

Table 7.3.2.5-1: Cell specific test parameters for E-UTRAN FDD (cell # 1) for in-sync radio link monitoring tests # 1 and # 2

Parameter	Unit	Test 1			Test 2						
		T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
E-UTRA RF Channel		1			1						
Number											
BW _{channel}	MHz			10					10		
Correlation Matrix and			1	x2 Lov	V		2x2 Low				
Antenna Configuration											
OCNG Pattern defined			0	P.2 FD	D			0	P.2 FD	D	
in D.1 (FDD)											
ρ_{A},ρ_{B}				0					-3		
PCFICH_RB	dB			4					1		
PDCCH_RA	dB			0			-3				
PDCCH_RB	dB			0			-3				
PBCH_RA	dB										
PBCH_RB	dB										
PSS_RA	dB										
SSS_RA	dB										
PHICH_RA	dB			0					2		
PHICH_RB	dB	0			-3						
PDSCH_RA	dB										
PDSCH_RB	dB										
OCNG_RA ^{Note 1}	dB										
OCNG RB ^{Note 1}	dB										
SNR Note 6	dB	-0.6	-4.7	-	-7.2	-0.6	-1.4	-5.3	-	-8.2	-1.4
				12.3					13.1		
N_{oc}	dBm/15 kHz	-98 -98									
Propagation condition		ETU 70 Hz ETU 70 Hz									
	L De used such th	sed such that the resources in cell # 1 are fully allocated and a constant total									

- Note 1: OCNG shall be used such that the resources in cell # 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: The uplink resources for CQI reporting are assigned to the UE prior to the start of time period
- Note 3: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
- Note 4: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
- Note 5: SNR levels correspond to the signal to noise ratio over the cell-specific reference signal REs.
- Note 6: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure 7.3.2.4-1

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During time duration T1, T2, T3, T4 and T5 the UE shall continuously report CQI according to the configured CQI mode (PUCCH 1-0) with a periodicity of 2 ms.

If the UE stops reporting the CQI before Point F (420 ms after the start of the time duration T5), the UE fails the tests.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

7.3.3 E-UTRAN TDD Radio Link Monitoring Test for Out-of-sync

7.3.3.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink radio link quality of the serving cell. This test will partly verify the E-UTRAN TDD radio link monitoring requirements in TS 36.133 section 7.6.

7.3.3.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

7.3.3.3 Minimum conformance requirements

When the downlink radio link quality estimated over the last 200 ms period becomes worse than the threshold Q_{out} , Layer 1 of the UE shall send an out-of-sync indication to the higher layers within 200 ms Q_{out} evaluation period. A Layer 3 filter shall be applied to the out-of-sync indications as specified in TS 36.331 [5] clause 5.5.3.2.

The out-of-sync and in-sync evaluations shall be performed as specified in section 4.2.1 in TS 36.213 [8]. Two successive indications from Layer 1 shall be separated by at least 10 ms.

The transmitter power shall be turned off within 40 ms after expiry of T310 timer as specified in TS 36.331 [5] section 5.3.11.

The normative reference for this requirement is TS 36.133 [4] clause 7.6.2 and A.7.3.3.

7.3.3.4 Test description

The test consists of four subtests with one cell configured; the difference between the subtests is the number of transmitter antennas and the propagation channel. Each subtest consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 7.3.3.4-1 shows the three different time durations and the corresponding variation of the downlink SNR in the active cell to emulate out-of-sync states.

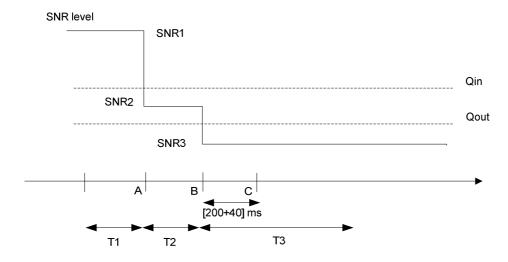


Figure 7.3.3.4-1: SNR variation for out-of-sync testing

7.3.3.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

1. Connect the SS (node B emulator) and AWGN noise sources or faders to the UE antenna connectors as stated below.

For subtest 1: As Shown in TS 36.508 [7] Annex A figure A.9 (without using the faders).

For subtest 2: As Shown in TS 36.508 [7] Annex A figure A.10 (without using the faders).

For subtest 3: As Shown in TS 36.508 [7] Annex A figure A.9

For subtest 4: As Shown in TS 36.508 [7] Annex A figure A.10

2. The general test parameter settings for the different subtests are set up according to Table 7.3.3.4.1-1.

- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 7.3.3.4.3.
- 5. There is one cell specified in this test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 7.3.3.4.1-1: General test parameters for E-UTRAN TDD out-of-sync testing

Pa	rameter	Unit		Va	Comment				
			Test 1	Test 2	Test 3	Test 4			
PCFICH/PDC parameters	CH/PHICH		R.6 TDD	R.7 TDD	R.6 TDD	R.7 TDD	As specified in section A.2.1 None of the PDCCH are intended for the UE under test		
OCNG param	eters		OP.2 TDD	OP.2 TDD	OP.2 TDD	OP.2 TDD	As specified in section D.2.2.		
Active cell			Cell 1	Cell 1	Cell 1	Cell 1	Cell 1 is on E-UTRA RF channel number 1		
CP length			Normal	Normal	Normal	Normal			
E-UTRA RF C	Channel Number		1	1	1	1	One E-UTRA TDD carrier frequency is used.		
E-UTRA Char (BW _{channel})	nnel Bandwidth	MHz	10	10	10	10			
Correlation MacConfiguration	atrix and Antenna		1x2 Low	2x2 Low	1x2 Low	2x2 Low	Correlation Matrix and Antenna Configuration are defined in TS 36.521-1 [10] Annex B.2.3.2		
Out of sync transmission	DCI format		1A	1A	1A	1A	As defined in section 5.3.3.1.4 in TS 36.212		
parameters (Note 1)	Number of Control OFDM symbols		2	2	2	2	Out of sync threshold Q _{out} and the corresponding		
	Aggregation level	CCE	8	8	8	8	hypothetical		
	ρ _A , ρ _B		0	-3	0	-3	PDCCH/PCFICH		
	Ratio of PDCCH to RS EPRE	dB	4	1	4	1	transmission parameters are as		
	Ratio of PCFICH to RS EPRE	dB	4	1	4	1	specified in TS 36.133 in section 7.6.1 and Table 7.6.1-1 respectively.		
DRX			OFF	OFF	OFF	OFF	, , , , , , , , , , , , , , , , , , , ,		
Layer 3 filterin	ng		Enabled	Enabled	Enabled	Enabled	Counters: N310 = 1; N311 = 1		
T310 timer		ms	0	0	0	0	T310 is disabled		
T311 timer		ms	1000	1000	1000	1000	T311 is enabled		
Periodic CQI	reporting mode		PUCCH 1-0	PUCCH 1-0	PUCCH 1-0	PUCCH 1-0	As defined in table 7.2.2-1 in TS 36.213.		
CQI reporting	periodicity	ms	1	1	1	1	Minimum CQI reporting periodicity		
Propagation of	Propagation channel		AWGN	AWGN	ETU 70 Hz	ETU 70 Hz			
T1		s	1	1	1	1			
T2	Γ2		0.4	0.4	0.4	0.4			
T3		S	0.5	0.5	0.5	0.5			
Note 1: PD	CCH/PCFICH corre	spondir	ng to the out o	f sync transmi	ssion paramet	ers need not b	e included in the		

Note 1: PDCCH/PCFICH corresponding to the out of sync transmission parameters need not be included in the Reference Measurement Channel

7.3.3.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CQI reporting in PUCCH 1-0 mode with a reporting periodicity of 1 ms.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 7.3.3.5-1 for subtests 1 and 2 and according to T1 in Table and 7.3.3.5-2 for subtest 3 and 4. Propagation conditions are set according to Annex B clause B.1.1 for subtests 1 and 2 and according to B.2.2 for subtests 3 and 4. T1 starts.
- 3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.3.3.5-1 for subtests 1 and 2 and according to T2 in Table 7.3.3.5-2 for subtests 3 and 4. T2 starts.
- 4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 7.3.3.5-1 for subtests 1 and 2 and according to T3 in Table 7.3.3.5-2 for subtests 3 and 4. T3 starts.
- 5. If the SS stops receiving CQI reports within 2 40 ms from the start of T3 the number of successful tests is increased by one, otherwise the number of failed tests is increased by one.
- 6. When T3 expires the SS shall change the SNR value to T1 as specified in Table 7.3.3.5-1 for subtests 1 and 2 and Table 7.3.3.5-2 for subtests 3 and 4.
- 7. If the UE has not re-established the connection in at least 1s, the UE is switched off and then on. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 6. Repeat steps 2-7 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.3.3.4.3 Message contents

Table 7.3.3.4.3-1: Common Exception messages for E-UTRAN TDD Radio Link Monitoring Test for Out-of-sync

Default Message Contents	
Common contents of system information	
blocks exceptions	
Default RRC messages and information	Table H.2.4-1
elements contents exceptions	

Table 7.3.3.4.3-2: CQI-ReportConfig-DEFAULT: Additional E-UTRAN TDD Radio Link Monitoring Test for Out-of-sync

Derivation Path: 36.331 clause 6.3.2			
Information Element	Value/remark	Comment	Condition
CQI-ReportConfig-DEFAULT ::= SEQUENCE {			
cqi-ReportPeriodic	ON		
cqi-ReportPeriodic CHOICE {			CQI_PERIOD IC
setup SEQUENCE {			
cqi-PUCCH-ResourceIndex	0		
cqi-pmi-ConfigIndex	0	(see Table 7.2.2- 1C in TS 36.213)	
cqi-FormatIndicatorPeriodic CHOICE {			
widebandCQI	NULL		
}			
ri-ConfigIndex	483	(see Table 7.2.2- 1B in TS 36.213)	
simultaneousAckNackAndCQI	FALSE	BOOLEAN	
}			
}			
}			

Condition	Explanation
CQI_PERIODIC	When periodic CQI reporting should be enabled

Table 7.3.3.4.3-3: *PhysicalConfigDedicated-DEFAULT:* Additional E-UTRAN TDD Radio Link Monitoring Test for Out-of-sync test 2 and 4 requirements

Derivation Path: 36.331 clause 6.3.2			
Information Element	Value/remark	Comment	Condition
PhysicalConfigDedicated-DEFAULT ::= SEQUENCE {			
antennalnfo CHOICE {			
defaultValue	NULL		2TX
}			
}			

Table 7.3.3.4.3-4: MAC-MainConfig-RBC: E-UTRAN FDD Radio Link Monitoring Test for Out-of-sync

Derivation Path: TS 36.508 [7] clause 4.8.2.1.5, Table 4.8.2.1.5-1 MAC-MainConfig-RBC				
Information Element	Comment	Condition		
timeAlignmentTimerDedicated	Infinity			

7.3.3.5 Test requirement

Table 7.3.3.5-1: Cell specific test parameters for E-UTRAN TDD (cell # 1) for out-of-sync radio link monitoring tests # 1 and # 2

Parameter	Unit		Test 1			Test 2	
		T1	T2	Т3	T1	T2	Т3
E-UTRA RF Channel			1			1	•
Number							
BW _{channel}	MHz		10			10	
Correlation Matrix and			1x2 Low			2x2 Low	
Antenna Configuration							
Special subframe			6			6	
configuration Note1							
Uplink-downlink			1			1	
configuration Note2							
OCNG Pattern defined		(OP.2 TDD			OP.2 TDD	
in D.2 (TDD)							
ρ_A, ρ_B			0			-3	
PCFICH_RB	dB		4			1	
PDCCH_RA	dB		0			-3	
PDCCH_RB	dB		0			-3	
PBCH_RA	dB						
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PHICH_RA	dB		0			-3	
PHICH_RB	dB		U			-3	
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA ^{Note 3}	dB						
OCNG_RB ^{Note 3}	dB						
SNR Note 8	dB	-4.5	-8.5	-13.7	-4.6	-8.6	-13.8
N_{oc}	dBm/15 kHz		-98			-98	
Propagation condition			AWGN			AWGN	
	al subframe cor	nfiguration	see table 4	4.2-1 in 3G	PP TS 36.	211.	
Note 2: For the uplink	-downlink conf	guration s	ee table 4.:	2-2 in 3GP	P TS 36.2	11.	

- the uplink-downlink configuration see table 4.2-2 in 3GPF
- Note 3: OCNG shall be used such that the resources in cell # 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 4: The uplink resources for CQI reporting are assigned to the UE prior to the start of time period T1.
- The timers and layer 3 filtering related parameters are configured prior to the start of time Note 5: period T1.
- Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
- Note 7: SNR levels correspond to the signal to noise ratio over the cell-specific reference signal REs.
- The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 Note 8: respectively in figure 7.3.3.4-1.

Table 7.3.3.5-2: Cell specific test parameters for E-UTRAN TDD (cell # 1) for out-of-sync radio link monitoring tests # 3 and # 4

Parameter	Unit		Test 3			Test 4	
		T1	T2	T3	T1	T2	T3
E-UTRA RF Channel			1			1	
Number							
BW _{channel}	MHz		10			10	
Correlation Matrix and			1x2 Low			2x2 Low	
Antenna Configuration							
Special subframe			6			6	
configuration ^{Note1}							
Uplink-downlink			1			1	
configuration Note2							
OCNG Pattern defined			OP.2 TDD			OP.2 TDD	
in D.2 (TDD)							
ρ_A , ρ_B			0			-3	
PCFICH_RB	dB		4			11	
PDCCH_RA	dB		0			-3	
PDCCH_RB	dB		0			-3	
PBCH_RA	dB						
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PHICH_RA	dB		0			-3	
PHICH_RB	dB		U			-3	
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA ^{Note 3}	dB						
OCNG_RB ^{Note 3}	dB						
SNR Note 8	dB	-0.6	-4.5	-12.1	-1.4	-5.0	-12-8
N_{oc}	dBm/15 kHz		-98			-98	
			-TIL 70 II			ET. 1. 70.1.1	
Propagation condition			ETU 70 Hz			ETU 70 Hz	
	al subframe co						
	c-downlink conf						onotont
	ne used such the ed power spec						onstant
	sources for CQ						timo
period T1.	sources for CQ	reporting	are assign	ed to the C	E phon to	lile Start Of	ume
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time							
period T1.							
•	!						
	SNR levels correspond to the signal to noise ratio over the cell-specific reference signal						
REs.		· ·			•		orginal
Note 8: The SNR in ti	me periods T1	, T2 and T3	3 is denote	d as SNR1	, SNR2 an	d SNR3	

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

respectively in figure 7.3.3.4-1.

During time duration T1 and T2 the UE shall continuously report CQI according to the configured CQI mode (PUCCH 1-0) with a periodicity of 1 ms.

The UE shall stop reporting the CQI within 240 ms from the start of the time duration T3.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

7.3.4 E-UTRAN TDD Radio Link Monitoring Test for In-sync

7.3.4.1 Test purpose

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink radio link quality of the serving cell. This test will partly verify the E-UTRAN TDD radio link monitoring requirements in TS 36.133 section 7.6.

7.3.4.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

7.3.4.3 Minimum conformance requirements

When the downlink radio link quality estimated over the last 100 ms period becomes better than the threshold Q_{in} , Layer 1 of the UE shall send an in-sync indication to the higher layers within 100 ms Q_{in} evaluation period. A L3 filter shall be applied to the in-sync indications as specified in TS 36.331 [5] clause 5.5.3.2.

The out-of-sync and in-sync evaluations shall be performed as specified in section 4.2.1 in TS 36.213 [8]. Two successive indications from Layer 1 shall be separated by at least 10 ms.

The transmitter power shall be turned off within 40 ms after expiry of T310 timer as specified in TS 36.331 [5] section 5.3.11.

The normative reference for this requirement is TS 36.133 [4] clause 7.6.2 and A.7.3.4.

7.3.4.4 Test description

The test consists of 2 subtests with one cell configured; the difference between the subtests is the number of transmitter antennas. Each subtest consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 7.3.4.4-1 shows the different time durations and the corresponding variation of the downlink SNR in the active cell to emulate in-sync states.

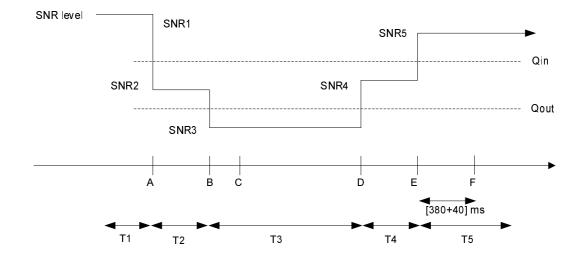


Figure 7.3.4.4-1: SNR variation for in-sync testing

7.3.4.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- For subtest 1 (one transmitter antenna): Connect the SS (node B emulator) and faders, to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.9.
 For subtest 2 (two transmitter antennas): Connect the SS (node B emulator) and faders, to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.10.
- 2. The general test parameter settings for the different subtest are set up according to Table 7.3.4.4.1-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.

- 4. Message contents are defined in clause 7.3.4.4.3.
- 6. There is one cell specified in this test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 7.3.4.4.1-1: General test parameters for E-UTRAN TDD in-sync testing

Parameter		Unit		lue	Comment
			Test 1	Test 2	
PCFICH/PDC parameters	CH/PHICH		R.6 TDD	R.7 TDD	As specified in section A.2.2 None of the PDCCH are
					intended for the UE under test
OCNG param	eters		OP.2 TDD	OP.2 TDD	As specified in section D.2.2.
Active cell			Cell 1	Cell 1	Cell 1 is on E-UTRA RF channel number 1
CP length			Normal	Normal	
E-UTRĂ RF C	Channel Number		1	1	One E-UTRA TDD carrier frequency is used.
E-UTRA Char (BW _{channel})	nnel Bandwidth	MHz	10	10	
	atrix and Antenna		1x2 Low	2x2 Low	Correlation Matrix and Antenna Configuration are defined in TS 36.521-1 [10] Annex B.2.3.2
n sync transmission	DCI format		1C	1C	As defined in section 5.3.3.1.4 in TS 36.212
parameters (Note 1)	Number of Control OFDM symbols		2	2	In sync threshold Q _{in} and the corresponding hypothetical
	Aggregation level	CCE	4	4	PDCCH/PCFICH
	ρΑ, ρΒ		0	-3	transmission
	Ratio of PDCCH to RS EPRE		0	-3	parameters are as specified in TS 36.133
	Ratio of PCFICH to RS EPRE		4	1	section and Table 7.6.1-2 respectively.
Out of sync transmission	DCI format		1A	1A	As defined in section 5.3.3.1.4 in TS 36.212
parameters (Note 1)	Number of Control OFDM symbols		2	2	Out of sync threshold Qout and the corresponding
	Aggregation level	CCE	8	8	hypothetical
	ρ _A , ρ _B		0	-3	PDCCH/PCFICH
	Ratio of PDCCH to RS EPRE	dB	4	1	transmission parameters are as
	Ratio of PCFICH to RS EPRE	dB	4	1	specified in TS 36.133 section 7.6.1 and Table 7.6.1-1 respectively.
DRX	•		OFF	OFF	, ,
Layer 3 filterin	ng		Enabled	Enabled	Counters: N310 = 1; N311 = 1
T310 timer		ms	2000	2000	T310 is enabled
T311 timer		ms	1000	1000	T311 is enabled
Periodic CQI reporting mode			PUCCH 1-0	PUCCH 1-0	As defined in table 7.2.2-1 in TS 36.213.
CQI reporting periodicity		ms	1	1	Minimum CQI reporting periodicity
Propagation of	channel		ETU 70 Hz	ETU 70 Hz	
T1		S	0.5	0.5	
T2		S	0.4	0.4	
T3		S	1.46	1.46	
T4		S	0.4	0.4	
T5		S	1	1	
	CCH/PCFICH corre				

Note 1: PDCCH/PCFICH corresponding to the in-sync and out of sync transmission parameters need not be included in the Reference Measurement Channel.

7.3.4.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CQI reporting in PUCCH 1-0 mode with a reporting periodicity of 1 ms.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 7.3.4.5-1 for subtest 1 and 2 respectively. Propagation conditions are set according to Annex B.2.2. T1 starts.
- 3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.3.4.5-1. T2 starts.
- 4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 7.3.4.5-1. T3 starts.
- 5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 7.3.4.5-1. T4 starts.
- 6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 7.3.4.5-1. T5 starts.
- 7. If the SS stops receiving CQI reports before point F (420 ms after the start of time duration T5) in Figure 7.3.4.4-1 the number of failed tests is increased by one, otherwise the number of successful tests is increased by one.
- 8. Repeat steps 2-7 for both subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.3.4.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 7.3.4.4.3-1: Common Exception messages for E-UTRAN TDD Radio Link Monitoring Test for insync

Default Message Contents		
Common contents of system information		
blocks exceptions		
Default RRC messages and information	Table H.2.4-2	
elements contents exceptions		

Table 7.3.4.4.3-2: CQI-ReportConfig-DEFAULT: Additional E-UTRAN TDD Radio Link Monitoring Test for In-sync

Derivation Path: 36.331 clause 6.3.2			
Information Element	Value/remark	Comment	Condition
CQI-ReportConfig-DEFAULT ::= SEQUENCE {			
cqi-ReportPeriodic	ON		
cqi-ReportPeriodic CHOICE {			CQI_PERIOD IC
setup SEQUENCE {			
cqi-PUCCH-ResourceIndex	0		
cqi-pmi-ConfigIndex	0	(see Table 7.2.2- 1C in TS 36.213)	
cqi-FormatIndicatorPeriodic CHOICE {			
widebandCQI	NULL		
}			
ri-ConfigIndex	483	(see Table 7.2.2- 1B in TS 36.213)	
simultaneousAckNackAndCQI	FALSE	BOOLEAN	
}			
}			
}			

Condition	Explanation
CQI PERIODIC	When periodic CQI reporting should be enabled

Table 7.3.4.4.3-3: *PhysicalConfigDedicated-DEFAULT:* Additional E-UTRAN TDD Radio Link Monitoring Test for in-sync test 2 requirement

Derivation Path: 36.331 clause 6.3.2			
Information Element	Value/remark	Comment	Condition
PhysicalConfigDedicated-DEFAULT ::= SEQUENCE {			
antennalnfo CHOICE {			
defaultValue	NULL		2TX
}			
}			

Table 7.3.4.4.3-4: MAC-MainConfig-RBC: E-UTRAN TDD Radio Link Monitoring Test for in-sync

Derivation Path: TS 36.508 [7] clause 4.8.2.1.5, Table 4.8.2.1.5-1 MAC-MainConfig-RBC					
Information Element Value/remark Comment Condition					
timeAlignmentTimerDedicated Infinity					

7.3.4.5 Test requirement

Table 7.3.4.5-1: Cell specific test parameters for E-UTRAN TDD (cell # 1) for In-sync radio link monitoring tests # 1 and # 2

Parameter	Unit			Test 1					Test 2		
		T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
E-UTRA RF Channel				1					1		
Number											
BW _{channel}	MHz			10					10		
Correlation Matrix and				1x2 Lov	V			2	2x2 Lov	/	
Antenna Configuration											
Special subframe				6					6		
configuration Note1											
Uplink-downlink				1					1		
configuration Note2											
OCNG Pattern defined			0	P.2 TD	D			0	P.2 TD	D	
in D.2 (TDD)											
ρ_A , ρ_B				0					-3		
PCFICH_RB	dB			4					1		
PDCCH_RA	dB			0					-3		
PDCCH_RB	dB			0					-3		
PBCH_RA	dB										
PBCH_RB	dB										
PSS_RA	dB										
SSS_RA	dB										
PHICH_RA	dB			0					-3		
PHICH_RB	dB			U					-3		
PDSCH_RA	dB										
PDSCH_RB	dB										
OCNG_RA ^{Note 3}	dB										
OCNG_RB ^{Note 3}	dB										
SNR Note 8	dB	-0.6	-4.5	-12.1	-7.2	-0.6	-1.4	-5.0	-	-8.2	-1.4
									12.8		
N_{oc}	dBm/15			-98					-98		
1 oc	kHz										
Propagation condition		ETU 70 Hz ETU 70 Hz									
Note 1: For the specia											
Note 2: For the uplink											
Note 3: OCNG shall b									ind a co	onstan	total
	ed power spectral density is achieved for all OFDM symbols.										
Note 4: The uplink res	sources for C	QI repo	rting a	re assiç	gned to	the UE	E prior	to the s	start of	time pe	eriod
T1.							_			_	
Note 5: The timers an	d layer 3 filte	ring rel	ated pa	aramete	ers are	configu	ıred pri	or to th	ne start	of time	÷

Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During time duration T1, T2, T3, T4 and T5 the UE shall continuously report CQI according to the configured CQI mode (PUCCH 1-0) with a periodicity of 1 ms.

If the UE stops reporting the CQI before Point F (420 ms after the start of the time duration T5), the UE fails the tests.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.

Note 7: SNR levels correspond to the signal to noise ratio over the cell-specific reference signal REs.

Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure 7.3.4.4-1.

7.3.5 E-UTRAN FDD Radio Link Monitoring Test for Out-of-sync in DRX

7.3.5.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink radio link quality of the serving cell when DRX is used. This test will partly verify the E-UTRAN FDD radio link monitoring requirements in TS 36.133 section 7.6.

7.3.5.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

7.3.5.3 Minimum conformance requirements

When DRX is used the Q_{out} evaluation period ($T_{Evaluate}Q_{out_DRX}$) and the Q_{in} evaluation period ($T_{Evaluate}Q_{in_DRX}$) is specified in TS 36.133 [4] Table 7.6.2.2-1 will be used.

When the downlink radio link quality estimated over the last $T_{\text{Evaluate}}Q_{\text{out_DRX}}$ [s] period becomes worse than the threshold Q_{out} , Layer 1 of the UE shall send out-of-sync indication to the higher layers within $T_{\text{Evaluate}}Q_{\text{out_DRX}}$ [s] evaluation period. A Layer 3 filter shall be applied to the out-of-sync indications as specified in TS 36.331 [5] clause 5.5.3.2.

When the downlink radio link quality estimated over the last $T_{\text{Evaluate}}Q_{\text{in_DRX}}$ [s] period becomes better than the threshold Q_{in} , Layer 1 of the UE shall send in-sync indications to the higher layers within $T_{\text{Evaluate}}Q_{\text{in_DRX}}$ [s] evaluation period. A L3 filter shall be applied to the in-sync indications as specified in TS 36.331 [5] clause 5.5.3.2.

The out-of-sync and in-sync evaluations shall be performed as specified in section 4.2.1 in TS 36.213 [8]. Two successive indications from Layer 1 shall be separated by at least max(10 ms, DRX_cycle_length).

Upon start of T310 timer as specified in section 5.3.11 in TS 36.331, the UE shall monitor the link for recovery using the evaluation period and Layer 1 indication interval corresponding to the non-DRX mode until the expiry of T310 timer

The transmitter power shall be turned off within 40 ms after expiry of T310 counter as specified in TS 36.331 [5] section 5.3.11.

Table 7.3.5.3-1: Qout and Qin Evaluation Period in DRX

DRX cycle length (s)	T _{Evaluate} Q _{out_DRX} and T _{Evaluate} Q _{in_DRX} (s) (DRX cycles)
≤0.04	Note (20)
0.04 < DRX cycle ≤ 0. 64	Note (10)
0.64 < DRX cycle ≤ 2.56	Note (5)
Note: Evaluation period length in	n time depends on the length of the

The normative reference for this requirement is TS 36.133 [4] clause 7.6.2 and A.7.3.5.

7.3.5.4 Test description

The test consists of two subtests with one cell configured; the difference between the subtests is the DRX cycle length, number of transmit antennas and the propagation conditions. Each subtest consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 7.3.5.4-1 shows the three different time durations and the corresponding variation of the downlink SNR in the active cell to emulate out-of-sync states.

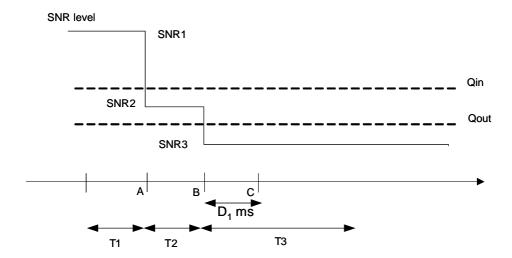


Figure 7.3.5.4-1: SNR variation for out-of-sync testing in DRX

7.3.5.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

1. Connect the SS (node B emulator) and AWGN noise sources or faders to the UE antenna connectors as stated below.

For subtest 1: As Shown in TS 36.508 [7] Annex A figure A.10

For subtest 2: As Shown in TS 36.508 [7] Annex A figure A.9 (without using the faders)

- 2. The general test parameter settings for the different subtests are set up according to Table 7.3.5.4-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 7.3.5.4.3
- 5. There is one cell specified in this test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 7.3.5.4.1-1: General test parameters for E-UTRAN FDD out-of-sync in DRX testing

Parameter		Unit	Val	ue	Comment
			Test 1	Test 2	
PCFICH/PDC parameters	CH/PHICH		R.7 FDD	R.6 FDD	As specified in section A.2.1. None of the PDCCH are intended for the UE under test
OCNG param	eters		OP.2 FDD	OP.2 FDD	As specified in section D.1.2.
Active cell			Cell 1	Cell 1	Cell 1 is on E-UTRA RF channel number 1
CP length			Normal	Normal	
E-UTRA RF C	Channel Number		1	1	One E-UTRA FDD carrier frequency is used.
(BW _{channel})	nnel Bandwidth	MHz	10	10	
Correlation Ma Antenna Conf			2x2 Low	1x2 Low	Correlation Matrix and Antenna Configuration are defined in TS 36.521-1 [10] Annex B.2.3.2
	DCI format		1A	1A	As defined in section 5.3.3.1.3 in TS 36.212
	Number of Control OFDM symbols		2	2	Out of sync threshold Q _{out} and the corresponding hypothetical
Out of sync transmission	Aggregation level	CCE	8	8	PDCCH/PCFICH transmission parameters
parameters	ρ _A , ρ _B		-3	0	are as specified in TS
(Note 1)	Ratio of PDCCH to RS EPRE	dB	1	4	36.133 in section 7.6.1 and Table 7.6.1-1 respectively.
	Ratio of PCFICH to RS EPRE	dB	1	4	
DRX cycle		ms	40	1280	See Table 7.3.5.5-2
Layer 3 filterin	ng		Enabled	Enabled	Counters: N310 = 1; N311 = 1
T310 timer		ms	0	0	T310 is disabled
T311 timer		ms	1000	1000	T311 is enabled
Periodic CQI reporting mode			PUCCH 1-0	PUCCH 1- 0	As defined in table 7.2.2-1 in TS 36.213.
CQI reporting		ms	2	2	Minimum CQI reporting periodicity
Propagation of	hannel		ETU 70 Hz	AWGN	
T1		S	4	32	
T2		S	1.6	12.8	
T3	· · · · · · · · · · · · · · · · · · ·	S	1.8	13	

Note 1: PDCCH/PCFICH corresponding to the out of sync transmission parameters need not be included in the Reference Measurement Channel.

7.3.5.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CQI reporting in PUCCH 1-0 mode with a reporting periodicity of 2 ms.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 7.3.5.5-1 for subtest 1 and 2. Propagation conditions are set according to Annex B clause B.2.2 for subtests 1 and according to B.1.1 for subtests 2. T1 starts.
- 3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.3.5.5-1 for subtests 1 and 2. T2 starts.

- 4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 7.3.5.5-1 for subtests 1 and 2. T3 starts.
- 5. For subtest 1: If the SS stops receiving CQI reports within D₁ = 900 ms from the start of T3 the number of successful tests is increased by one, otherwise the number of failed tests is increased by one. For subtest 2: If the SS stops receiving CQI reports within D₁ = 6500 ms from the start of T3 the number of successful tests is increased by one, otherwise the number of failed tests is increased by one.
- 6. When T3 expires the SS shall change the SNR value to T1 as specified in Table 7.3.5.5-1 for subtests 1 and 2.
- 7. If the UE has not re-established the connection in at least 1s, the UE is switched off and then on. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 8. Repeat steps 2-7 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.3.5.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 7.3.5.4.3-1: Common Exception messages for E-UTRAN FDD Radio Link Monitoring Test for Out-of-sync in DRX

Default Message Contents					
Common contents of system information					
blocks exceptions					
Default RRC messages and information	Table H.2.4-1				
elements contents exceptions					

Table 7.3.5.4.3-2: CQI-ReportConfig-DEFAULT: Additional E-UTRAN FDD Radio Link Monitoring Test for Out-of-sync in DRX

Derivation Path: 36.331 clause 6.3.2			
Information Element	Value/remark	Comment	Condition
CQI-ReportConfig-DEFAULT ::= SEQUENCE {			
cqi-ReportPeriodic	ON		
cqi-ReportPeriodic ::= CHOICE {			CQI_PERIOD IC
setup SEQUENCE {			
cqi-PUCCH-ResourceIndex	0		
cqi-pmi-ConfigIndex	0	(see Table 7.2.2- 1A in TS 36.213)	
cqi-FormatIndicatorPeriodic CHOICE {			
widebandCQI	NULL		
}			
ri-ConfigIndex	483	(see Table 7.2.2- 1B in TS 36.213)	
simultaneousAckNackAndCQI	FALSE	BOOLEAN	
}			
}			
}			

Condition	Explanation
CQI_PERIODIC	When periodic CQI reporting should be enabled

Table 7.3.5.4.3-3: MAC-MainConfig-RBC: E-UTRAN FDD Radio Link Monitoring test for Out-of-sync in DRX, subtest #1 requirement

Derivation Path: TS 36.508 [7] clause 4.8.2.1.5, T	able 4.8.2.1.6-1 MAC-MainCor	nfig-RBC	
Information Element	Value/remark	Comment	Condition
MAC-MainConfig-RBC ::= SEQUENCE {			
ul-SCH-Config SEQUENCE {			
maxHARQ-Tx	n5		
periodicBSR-Timer	sf20		
retxBSR-Timer	sf1280		
ttiBundling	FALSE		
}			
drx-Config CHOICE {			pc_FeatrGrp _5 AND DRX_S
Setup SEQUENCE {			
onDurationTimer	psf2		
drx-InactivityTimer	psf1		
drx-RetransmissionTimer	sf1		
longDRX-CycleStartOffset CHOICE {		sf40 typical value in real network for real-time services.	
sf40	0		
}			
shortDRX	Not present		
}			
}			
timeAlignmentTimerDedicated	infinity		

Table 7.3.5.4.3-4: MAC-MainConfig-RBC: E-UTRAN FDD Radio Link Monitoring test for Out-of-sync in DRX, subtest #2 requirement

Derivation Path: TS 36.508 [7] clause 4.8.2.1.5, Table	e 4.8.2.1.6-1 MAC-MainCon	fig-RBC	
Information Element	Value/remark	Comment	Condition
MAC-MainConfig-RBC ::= SEQUENCE {			
ul-SCH-Config SEQUENCE {			
maxHARQ-Tx	n5		
periodicBSR-Timer	sf20		
retxBSR-Timer	sf1280		
ttiBundling	FALSE		
}			
drx-Config CHOICE {			pc_FeatrGrp _5 AND DRX_S
Setup SEQUENCE {			
onDurationTimer	psf2		
drx-InactivityTimer	psf1		
drx-RetransmissionTimer	sf1		
longDRX-CycleStartOffset CHOICE {		sf1280 typical value in real network for best- effort services.	
sf1280	0		
}			
shortDRX	Not present		
}			
}			
timeAlignmentTimerDedicated	infinity		

Table 7.3.5.4.3-5: *PhysicalConfigDedicated-DEFAULT*: Additional E-UTRAN FDD Radio Link Monitoring test for Out-of-sync in DRX, subtest #1 and #2 requirements

Derivation Path: TS 36.508 [7] clause 4.8.2.1.6, Table 4.8.2.1.6-1 PhysicalConfigDedicated-DEFAULT						
Information Element	Value/remark	Comment	Condition			
PhysicalConfigDedicated-DEFAULT ::= SEQUENCE {						
schedulingRequestConfig	SchedulingRequest-					
	Config-DEFAULT					
}						

Table 7.3.5.4.3-6: SchedulingRequest-Config-DEFAULT: Additional E-UTRAN FDD Radio Link Monitoring test for Out-of-sync in DRX, subtest #1 and #2 requirements

Value/remark	Comment	Condition
41	10 MHz channel bandwidth parameter	
0		
n4		
	41	41 10 MHz channel bandwidth parameter 0

7.3.5.5 Test requirement

Table 7.3.5.5-1: Cell specific test parameters for E-UTRAN FDD (cell # 1) for out-of-sync radio link monitoring subtests #1 and # 2

Parameter	Unit	Unit Test 1				Test 2	
		T1	T2	T3	T1	T2	Т3
E-UTRA RF Channel Number			1			1	
BW _{channel}	MHz		10			10	
Correlation Matrix and Antenna			2x2 Low			1x2 Low	
Configuration							
OCNG Pattern defined in D.1 (FDD)			OP.2 FDD			OP.2 FDD	
ρΑ, ρΒ			-3			0	
PCFICH_RB	dB		1			4	
PDCCH_RA	dB		-3			0	
PDCCH_RB	dB		-3			0	
PBCH_RA	dB						
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PHICH_RA	dB		-3		0		
PHICH_RB	dB		-5		ű		
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA ^{Note1}	dB						
OCNG_RB ^{Note1}	dB		,				,
SNR ^{Note 6}	dB	-1.4	-5.3	-13.1	-4.1	-8.9	-14.1
N_{oc}	dBm/15		-98			-98	
	kHz						
Propagation condition		ETU 70 Hz AWGN					
	Note 1: OCNG shall be used such that the resources in cell # 1 are fully allocated and a constant						constant
total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The uplink resources for CQI reporting are assigned to the UE prior to the start of time period T1.							
Note 3: The timers a period T1.	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.						

Note 4:

The signal contains PDCCH for UEs other than the device under test as part of OCNG. SNR levels correspond to the signal to noise ratio over the cell-specific reference signal Note 5: REs.

The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 Note 6: respectively in figure 7.3.5.4-1.

Table 7.3.5.5-2: DRX-Configuration for E-UTRAN FDD Radio Link Monitoring out-of-sync in DRX test

Field	Test1	Test2	Comment
Field	Value	Value	
onDurationTimer	psf2	psf2	As specified in section 6.3.2 in
drx-InactivityTimer	psf1	psf1	3GPP TS 36.331
drx-RetransmissionTimer	sf1	sf1	
longDRX-CycleStartOffset	sf40	sf1280	
shortDRX	disable	disable	

Table 7.3.5.5-3: TimeAlignmentTimer -Configuration for E-UTRAN FDD Radio Link Monitoring out-ofsync in DRX test

Field	Test1	Test2	Comment
Field	Value	Value	
TimeAlignmentTimer	infinity	infinity	As specified in section 6.3.2 in 3GPP TS 36.331
sr-ConfigIndex	0	0	For further information see section 6.3.2 in 3GPP TS 36.331 and section10.1 in 3GPP TS 36.213.

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

In subtest 1 and subtest 2 during time duration T1 and T2 the UE shall report CQI according to the configured CQI mode (PUCCH 1-0) once every DRX cycle.

In subtest 1 the UE shall stop reporting the CQI within duration $D_1 = 900$ ms from the start of the time duration T3.

In subtest 2 the UE shall stop reporting the CQI within duration $D_1 = 6500$ ms from the start of the time duration T3.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

7.3.6 E-UTRAN FDD Radio Link Monitoring Test for In-sync in DRX

7.3.6.1 Test purpose

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink radio link quality of the serving cell when DRX is used. This test will partly verify the E-UTRAN FDD radio link monitoring requirements in TS 36.133 section 7.6.

7.3.6.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

7.3.6.3 Minimum conformance requirements

When DRX is used the Q_{out} evaluation period ($T_{Evaluate}Q_{out_DRX}$) and the Q_{in} evaluation period ($T_{Evaluate}Q_{in_DRX}$) is specified in TS 36.133 [4] Table 7.6.2.2-1 will be used.

When the downlink radio link quality estimated over the last $T_{\text{Evaluate}}Q_{\text{out_DRX}}$ [s] period becomes worse than the threshold Q_{out} , Layer 1 of the UE shall send out-of-sync indication to the higher layers within $T_{\text{Evaluate}}Q_{\text{out_DRX}}$ [s] evaluation period. A Layer 3 filter shall be applied to the out-of-sync indications as specified in TS 36.331 [5] clause 5.5.3.2.

When the downlink radio link quality estimated over the last $T_{\text{Evaluate}}Q_{\text{in_DRX}}$ [s] period becomes better than the threshold Q_{in} , Layer 1 of the UE shall send in-sync indications to the higher layers within $T_{\text{Evaluate}}Q_{\text{in_DRX}}$ [s] evaluation period. A L3 filter shall be applied to the in-sync indications as specified in TS 36.331 [5] clause 5.5.3.2.

The out-of-sync and in-sync evaluations shall be performed as specified in section 4.2.1 in TS 36.213 [8]. Two successive indications from Layer 1 shall be separated by at least max(10 ms, DRX_cycle_length).

Upon start of T310 timer as specified in section 5.3.11 in TS 36.331, the UE shall monitor the link for recovery using the evaluation period and Layer 1 indication interval corresponding to the non-DRX mode until the expiry of T310 timer.

The transmitter power shall be turned off within 40 ms after expiry of T310 counter as specified in TS 36.331 [5] section 5.3.11.

Table 7.3.6.3-1: Qout and Qin Evaluation Period in DRX

DRX cycle length (s)	T _{Evaluate} _Q _{out_DRX} and T _{Evaluate} _Q _{in_DRX} (s) (DRX cycles)		
≤0.04	Note (20)		
0.04 < DRX cycle ≤ 0. 64	Note (10)		
0.64 < DRX cycle ≤ 2.56	Note (5)		
Note: Evaluation period length in time depends on the length of the DRX cycle in use			

The normative reference for this requirement is TS 36.133 [4] clause 7.6.2 and A.7.3.6.

7.3.6.4 Test description

The test consists of one subtest with one cell configured. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 7.3.6.4-1 shows the different time durations and the corresponding variation of the downlink SNR in the active cell to emulate in-sync states.

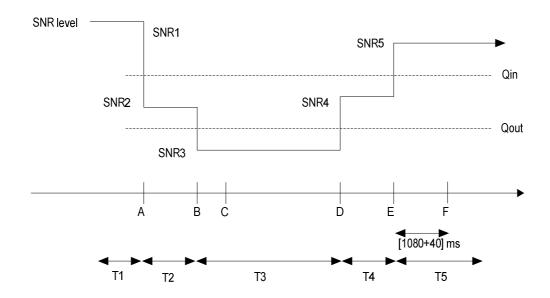


Figure 7.3.6.4-1: SNR variation for in-sync testing in DRX

7.3.6.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise source to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.18.
- 2. The general test parameter settings for the test is set up according to Table 7.3.6.4-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 7.3.6.4.3
- 5. There is one cell specified in this test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 7.3.6.4.1-1: General test parameters for E-UTRAN FDD in-sync in DRX testing

Parameter		Unit	Value	Comment
PCFICH/PDCCH/PHICH parameters			R.6 FDD	As specified in section A.2.1. None of the PDCCH are intended for the UE under test
OCNG parameters	OCNG parameters		OP.2 FDD	As specified in section D.1.2.
Active cell			Cell 1	Cell 1 is on E-UTRA RF channel number 1
CP length			Normal	
E-UTRA RF Chann			1	One E-UTRA FDD carrier frequency is used.
E-UTRA Channel B (BW _{channel})		MHz	10	
Correlation Matrix a Configuration	and Antenna		1x2 Low	Correlation Matrix and Antenna Configuration are defined in TS 36.521-1 [10] Annex B.2.3.2
	DCI format		1C	As defined in section 5.3.3.1.4 in TS 36.212
In	Number of Control OFDM symbols		2	In sync threshold Q _{in} and the corresponding hypothetical PDCCH/PCFICH transmission
In sync transmission	Aggregation level	CCE	4	parameters are as specified in TS 36.133in section and Table
parameters (Note 1)	ρΑ, ρΒ		0	7.6.1-2 respectively.
(Note 1)	Ratio of PDCCH to RS EPRE		0	
	Ratio of PCFICH to RS EPRE		4	
	DCI format		1A	As defined in section 5.3.3.1.3 in TS 36.212
0.4.46.5	Number of Control OFDM symbols		2	Out of sync threshold Q _{out} and the corresponding hypothetical PDCCH/PCFICH transmission
Out of sync transmission parameters	Aggregation level	CCE	8	parameters are as specified in TS 36.133 in section 7.6.1 and
(Note 1)	ρ_A , ρ_B		0	Table 7.6.1-1 respectively.
(1010-1)	Ratio of PDCCH to RS EPRE	dB	4	
	Ratio of PCFICH to RS EPRE	dB	4	
DRX cycle		ms	40	See Table 7.3.6.5-2
Layer 3 filtering			Enabled	Counters: N310 = 1; N311 = 1
T310 timer		ms	2000	T310 is enabled
T311 timer		ms	1000	T311 is enabled
Periodic CQI report			PUCCH 1-0	As defined in table 7.2.2-1 in TS 36.213.
	CQI reporting periodicity		2	Minimum CQI reporting periodicity
Propagation channe	el		AWGN	
T1		S S	4	
	T2		1.6	
T3 T4		S	1.46	
T5		S S	0.4	
Note 1: PDCCH/PCFICH corresponding to the in-sync and out of sync transmission				

Note 1: PDCCH/PCFICH corresponding to the in-sync and out of sync transmission parameters need not be included in the Reference Measurement Channel.

7.3.6.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CQI reporting in PUCCH 1-0 mode with a reporting periodicity of 2 ms.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 7.3.6.5-1. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.3.6.5-1. T2 starts.
- 4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 7.3.6.5-1. T3 starts.
- 5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 7.3.6.5-1. T4 starts.
- 6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 7.3.6.5-1. T5 starts.
- 7. If the SS stops receiving CQI reports during T1 to T5 once every DRX cycle the number of failed tests is increased by one, otherwise the number of successful tests is increased by one.
- 8. Repeat steps 2-7 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.3.6.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 7.3.6.4.3-1: Common Exception messages for E-UTRAN FDD Radio Link Monitoring Test for Insync in DRX

Default Message Contents			
Common contents of system information			
blocks exceptions			
Default RRC messages and information	Table H.2.4-2		
elements contents exceptions			

Table 7.3.6.4.3-2: CQI-ReportConfig-DEFAULT: Additional E-UTRAN FDD Radio Link Monitoring Test for In-sync in DRX

Derivation Path: 36.331 clause 6.3.2			
Information Element	Value/remark	Comment	Condition
CQI-ReportConfig-DEFAULT ::= SEQUENCE {			
cqi-ReportPeriodic	ON		
cqi-ReportPeriodic ::= CHOICE {			CQI_PERIOD IC
setup SEQUENCE {			
cqi-PUCCH-ResourceIndex	0		
cqi-pmi-ConfigIndex	0	(see Table 7.2.2- 1A in TS 36.213)	
cqi-FormatIndicatorPeriodic CHOICE {			
widebandCQI	NULL		
}			
ri-ConfigIndex	483	(see Table 7.2.2- 1B in TS 36.213)	
simultaneousAckNackAndCQI	FALSE	BOOLEAN	
}			
}			
}			

Condition	Explanation	
CQI PERIODIC	When periodic CQI reporting should be enabled	

Table 7.3.6.4.3-3: MAC-MainConfig-RBC: E-UTRAN FDD Radio Link Monitoring test for In-sync in DRX requirement

Derivation Path: TS 36.508 [7] clause 4.8.2.1.5, Table	4.8.2.1.6-1 MAC-MainCon	fig-RBC	
Information Element	Value/remark	Comment	Condition
MAC-MainConfig-RBC ::= SEQUENCE {			
ul-SCH-Config SEQUENCE {			
maxHARQ-Tx	n5		
periodicBSR-Timer	sf20		
retxBSR-Timer	sf1280		
ttiBundling	FALSE		
}			
drx-Config CHOICE {			pc_FeatrGrp _5 AND DRX_S
Setup SEQUENCE {			
onDurationTimer	psf2		
drx-InactivityTimer	psf1		
drx-RetransmissionTimer	sf1		
longDRX-CycleStartOffset CHOICE {		sf40 typical value in real network for real-time services.	
sf40	0		
}			
shortDRX	Not present		
}			
}			
timeAlignmentTimerDedicated	infinity		

Table 7.3.6.4.3-4: *PhysicalConfigDedicated-DEFAULT*: Additional E-UTRAN FDD Radio Link Monitoring test for In-sync in DRX requirement

Derivation Path: TS 36.508 [7] clause 4.8.2.1.6, Table 4.8.2.1.6-1 PhysicalConfigDedicated-DEFAULT			
Information Element	Value/remark	Comment	Condition
PhysicalConfigDedicated-DEFAULT ::= SEQUENCE {			
schedulingRequestConfig	SchedulingRequest-		
	Config-DEFAULT		
}			

Table 7.3.6.4.3-5: SchedulingRequest-Config-DEFAULT: Additional E-UTRAN FDD Radio Link Monitoring test for In-sync in DRX requirement

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-20 SchedulingRequest-Config-DEFAULT					
Information Element	Value/remark	Comment	Condition		
SchedulingRequest-Config-DEFAULT ::= CHOICE {					
setup SEQUENCE {					
sr-PUCCH-ResourceIndex	41	10 MHz channel bandwidth parameter			
sr-ConfigIndex	0				
dsr-TransMax	n4				
}					
}					

7.3.6.5 Test requirement

Table 7.3.6.5-1: Cell specific test parameters for E-UTRAN FDD (cell # 1) for In-sync radio link monitoring test

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
E-UTRA RF Channel Number				1		
BW _{channel}	MHz		10			
Correlation Matrix and			1x2 Low			
Antenna Configuration						
OCNG Pattern defined in D.1				OP.2 FDD		
(FDD)						
ρ _A , ρ _B				0		
PCFICH_RB	dB			4		
PDCCH_RA	dB			0		
PDCCH_RB	dB			0		
PBCH_RA	dB					
PBCH_RB	dB					
PSS_RA	dB					
SSS_RA	dB					
PHICH_RA	dB			0		
PHICH_RB	dB					
PDSCH_RA	dB					
PDSCH_RB	dB					
OCNG_RA ^{Note1}	dB					
OCNG_R B ^{Note1} SNR Note 6	dB	-4.1	0.0	444	0.0	1 4 4
SNR	dB	-4.1	-8.9	-14.1	-9.3	-4.1
N_{oc}	dBm/15			-98		
	kHz			ANACONI		
Propagation condition				AWGN		
Note 1: OCNG shall be used					and a consta	ant total
		nsity is achieved for all OFDM symbols.				
		reporting are assigned to the UE prior to the start of time period T1. g related parameters are configured prior to the start of time period				
Note 3: The timers and layer T1.	3 ilitering rela	ited paramete	ers are config	urea prior to	the start of tir	ne perioa
		e signal to noise ratio over the cell-specific reference signal REs.				
Note 6: The SNR in time per respectively in figure		nd T3 is deno	ted as SNR1	, SNR2, SNR	3, SNR4 and	d SNR5

Table 7.3.6.5-2: DRX-Configuration for E-UTRAN FDD Radio Link Monitoring in-sync in DRX test

Field	Value	Comment
onDurationTimer	psf2	As specified in section 6.3.2 in
drx-InactivityTimer	psf1	3GPP TS 36.331
drx-RetransmissionTimer	sf1	
longDRX-CycleStartOffset	sf40	
shortDRX	disable	

Table 7.3.6.5-3: *TimeAlignmentTimer* -Configuration for E-UTRAN FDD Radio Link Monitoring in-sync in DRX test

Field	Value	Comment
TimeAlignmentTimer	infinity	As specified in section 6.3.2 in 3GPP TS 36.331
sr-ConfigIndex	[0]	For further information see section 6.3.2 in 3GPP TS 36.331 and section10.1 in 3GPP TS 36.213.

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the entire test from time period T1 to T5 the UE shall report CQI according to the configured CQI mode (PUCCH 1-0) once every DRX cycle.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

7.3.7 E-UTRAN TDD Radio Link Monitoring Test for Out-of-sync in DRX

7.3.7.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink radio link quality of the serving cell when DRX is used. This test will partly verify the E-UTRAN TDD radio link monitoring requirements in TS 36.133 section 7.6.

7.3.7.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

7.3.7.3 Minimum conformance requirements

When DRX is used the Q_{out} evaluation period ($T_{Evaluate}Q_{out_DRX}$) and the Q_{in} evaluation period ($T_{Evaluate}Q_{in_DRX}$) is specified in TS 36.133 [4] Table 7.6.2.2-1 will be used.

When the downlink radio link quality estimated over the last $T_{\text{Evaluate}}Q_{\text{out_DRX}}$ [s] period becomes worse than the threshold Q_{out} , Layer 1 of the UE shall send out-of-sync indication to the higher layers within $T_{\text{Evaluate}}Q_{\text{out_DRX}}$ [s] evaluation period. A Layer 3 filter shall be applied to the out-of-sync indications as specified in TS 36.331 .

When the downlink radio link quality estimated over the last $T_{\text{Evaluate}}Q_{\text{in_DRX}}$ [s] period becomes better than the threshold Q_{in} , Layer 1 of the UE shall send in-sync indications to the higher layers within $T_{\text{Evaluate}}Q_{\text{in_DRX}}$ [s] evaluation period. A L3 filter shall be applied to the in-sync indications as specified in TS 36.331.

The out-of-sync and in-sync evaluations shall be performed as specified in section 4.2.1 in TS 36.213 [8]. Two successive indications from Layer 1 shall be separated by at least max(10 ms, DRX cycle length).

Upon start of T310 timer as specified in section 5.3.11 in TS 36.331 [5], the UE shall monitor the link for recovery using the evaluation period and Layer 1 indication interval corresponding to the non-DRX mode until the expiry of T310 timer.

The transmitter power shall be turned off within 40 ms after expiry of T310 counter as specified in TS 36.331 [5] section 5.3.11.

Table 7.3.7.3-1: Q_{out} and Q_{in} Evaluation Period in DRX

DRX cycle length (s)	T _{Evaluate} Q _{out_DRX} and T _{Evaluate} Q _{in_DRX} (s) (DRX cycles)			
≤0.04	Note (20)			
0.04 < DRX cycle ≤ 0. 64	Note (10)			
0.64 < DRX cycle ≤ 2.56	Note (5)			
Note: Evaluation period length in time depends on the length of the				
DRX cycle in use				

The normative reference for this requirement is TS 36.133 [4] clause 7.6.2 and A.7.3.7.

7.3.7.4 Test description

The test consists of two subtests with one cell configured; the difference between the subtests is the DRX cycle length, number of transmit antennas and the propagation conditions. Each subtest consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 7.3.7.4-1 shows the three different time durations and the corresponding variation of the downlink SNR in the active cell to emulate out-of-sync states.

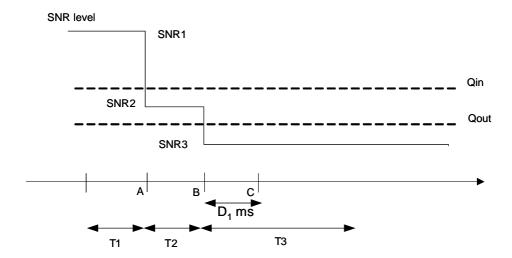


Figure 7.3.7.4-1: SNR variation for out-of-sync testing in DRX

7.3.7.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

1. Connect the SS (node B emulator) and AWGN noise sources or faders to the UE antenna connectors as stated below.

For subtest 1: As Shown in TS 36.508 [7] Annex A figure A.10

For subtest 2: As Shown in TS 36.508 [7] Annex A figure A.9 (without using the faders)

- 2. The general test parameter settings for the different subtests are set up according to Table 7.3.7.4-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 7.3.7.4.3
- 5. There is one cell specified in this test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 7.3.7.4.1-1: General test parameters for E-UTRAN TDD out-of-sync in DRX testing

Parameter		Unit	Val	ue	Comment
			Test 1	Test 2	
PCFICH/PDCCH/PHICH parameters			R.7 TDD	R. 4.3.1.6 TDD	As specified in section A.2.2. None of the PDCCH are intended for the UE under test
OCNG param	eters		OP.2 TDD	OP.2 TDD	As specified in section D.2.2.
Active cell			Cell 1	Cell 1	Cell 1 is on E-UTRA RF channel number 1
CP length			Normal	Normal	
E-UTRA RF C	Channel Number		1	1	One E-UTRA TDD carrier frequency is used.
(BW _{channel})	nnel Bandwidth	MHz	10	10	
Correlation Mantenna Conf	iguration		2x2 Low	1x2 Low	Correlation Matrix and Antenna Configuration are defined in TS 36.521-1 [10] Annex B.2.3.2
	DCI format		1A	1A	As defined in section 5.3.3.1.3 in TS 36.212
	Number of Control OFDM symbols		2	2	Out of sync threshold Q _{out} and the corresponding hypothetical
Out of sync transmission	Aggregation level	CCE	8	8	PDCCH/PCFICH transmission parameters
parameters	ρ _A , ρ _B		-3	0	are as specified in TS
(Note 1)	Ratio of PDCCH to RS EPRE	dB	1	4	36.133 in section 7.6.1 and Table 7.6.1-1 respectively.
	Ratio of PCFICH to RS EPRE	dB	1	4	
DRX cycle		ms	40	1280	See Table 7.3.7.5-2
Layer 3 filterin			Enabled	Enabled	Counters: N310 = 1; N311 = 1
T310 timer	<u> </u>	ms	0	0	T310 is disabled
T311 timer		ms	1000	1000	T311 is enabled
	Periodic CQI reporting mode		PUCCH 1-0	PUCCH 1- 0	As defined in table 7.2.2-1 in TS 36.213.
CQI reporting		ms	1	1	Minimum CQI reporting periodicity
Propagation of	hannel		ETU 70 Hz	AWGN	
T1		S	4	32	
T2		S	1.6	12.8	
T3		S	1.8	13	

Note 1: PDCCH/PCFICH corresponding to the out of sync transmission parameters need not be included in the Reference Measurement Channel.

7.3.7.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CQI reporting in PUCCH 1-0 mode with a reporting periodicity of 1 ms.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 7.3.7.5-1 for subtest 1 and 2. Propagation conditions are set according to Annex B clause B.2.2 for subtests 1 and according to B.1.1 for subtests 2. T1 starts.
- 3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.3.7.5-1 for subtests 1 and 2. T2 starts.

- 4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 7.3.7.5-1 for subtests 1 and 2. T3 starts.
- 5. For subtest 1: If the SS stops receiving CQI reports within $D_1 = 900$ ms from the start of T3 the number of successful tests is increased by one, otherwise the number of failed tests is increased by one. For subtest 2: If the SS stops receiving CQI reports within $D_1 = 6500$ ms from the start of T3 the number of successful tests is increased by one, otherwise the number of failed tests is increased by one.
- 6. When T3 expires the SS shall change the SNR value to T1 as specified in Table 7.3.7.5-1 for subtests 1 and 2.
- 7. If the UE has not re-established the connection in at least 1s, the UE is switched off and then on. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 8. Repeat steps 2-7 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.3.7.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 7.3.7.4.3-1: Common Exception messages for E-UTRAN TDD Radio Link Monitoring Test for Out-of-sync in DRX

Default Message Contents				
Common contents of system information				
blocks exceptions				
Default RRC messages and information	Table H.2.4-1			
elements contents exceptions				

Table 7.3.7.4.3-2: CQI-ReportConfig-DEFAULT: Additional E-UTRAN TDD Radio Link Monitoring Test for Out-of-sync in DRX

Derivation Path: 36.331 clause 6.3.2			
Information Element	Value/remark	Comment	Condition
CQI-ReportConfig-DEFAULT ::= SEQUENCE {			
cqi-ReportPeriodic	ON		
cqi-ReportPeriodic ::= CHOICE {			CQI_PERIOD IC
setup SEQUENCE {			
cqi-PUCCH-ResourceIndex	0		
cqi-pmi-ConfigIndex	0	(see Table 7.2.2- 1C in TS 36.213)	
cqi-FormatIndicatorPeriodic CHOICE {			
widebandCQI	NULL		
}			
ri-ConfigIndex	483	(see Table 7.2.2- 1B in TS 36.213)	
simultaneousAckNackAndCQI	FALSE	BOOLEAN	
}			
}			
}			

Condition	Explanation
CQI_PERIODIC	When periodic CQI reporting should be enabled

Table 7.3.7.4.3-3: MAC-MainConfig-RBC: E-UTRAN TDD Radio Link Monitoring test for Out-of-sync in DRX, subtest #1 requirement

Derivation Path: TS 36.508 [7] clause 4.8.2.1.5, Table	4.8.2.1.6-1 MAC-MainCon	fig-RBC	
Information Element	Value/remark	Comment	Condition
MAC-MainConfig-RBC ::= SEQUENCE {			
ul-SCH-Config SEQUENCE {			
maxHARQ-Tx	n5		
periodicBSR-Timer	sf20		
retxBSR-Timer	sf1280		
ttiBundling	FALSE		
}			
drx-Config CHOICE {			pc_FeatrGrp _5 AND DRX_S
Setup SEQUENCE {			
onDurationTimer	psf2		
drx-InactivityTimer	psf1		
drx-RetransmissionTimer	sf1		
longDRX-CycleStartOffset CHOICE {		sf40 typical value in real network for real-time services.	
sf40	2		
}			
shortDRX	Not present		
}			
}			
timeAlignmentTimerDedicated	infinity		

Table 7.3.7.4.3-4: MAC-MainConfig-RBC: E-UTRAN TDD Radio Link Monitoring test for Out-of-sync in DRX, subtest #2 requirement

Derivation Path: TS 36.508 [7] clause 4.8.2.1.5, T	Table 4.8.2.1.6-1 MAC-MainCor	fig-RBC	
Information Element	Value/remark	Comment	Condition
MAC-MainConfig-RBC ::= SEQUENCE {			
ul-SCH-Config SEQUENCE {			
maxHARQ-Tx	n5		
periodicBSR-Timer	sf20		
retxBSR-Timer	sf1280		
ttiBundling	FALSE		
}			
drx-Config CHOICE {			pc_FeatrGrp _5 AND DRX_DRX_ L
Setup SEQUENCE {			
onDurationTimer	psf2		
drx-InactivityTimer	psf1		
drx-RetransmissionTimer	sf1		
longDRX-CycleStartOffset CHOICE {		sf1280 typical value in real network for best- effort services.	
sf1280	2		
}			
shortDRX	Not present		
}			
}			
timeAlignmentTimerDedicated	infinity		

Table 7.3.7.4.3-5: *PhysicalConfigDedicated-DEFAULT*: Additional E-UTRAN TDD Radio Link Monitoring test for Out-of-sync in DRX, subtest #1 and #2 requirements

Derivation Path: TS 36.508 [7] clause 4.8.2.1.6, Table 4.8.2.1.6-1 PhysicalConfigDedicated-DEFAULT					
Information Element	Value/remark	Comment	Condition		
PhysicalConfigDedicated-DEFAULT ::= SEQUENCE {					
schedulingRequestConfig	SchedulingRequest-				
	Config-DEFAULT				
}					

Table 7.3.7.4.3-6: SchedulingRequest-Config-DEFAULT: Additional E-UTRAN TDD Radio Link Monitoring test for Out-of-sync in DRX, subtest #1 and #2 requirements

Information Element	Value/remark	Comment	Condition
SchedulingRequest-Config-DEFAULT ::= CHOICE {			
setup SEQUENCE {			
sr-PUCCH-ResourceIndex	41	10 MHz channel bandwidth parameter	
sr-ConfigIndex	0		
dsr-TransMax	n4		
}			
}			

7.3.7.5 Test requirement

Note 8:

respectively in figure 7.3.7.4-1.

Table 7.3.7.5-1: Cell specific test parameters for E-UTRAN TDD (cell # 1) for out-of-sync radio link monitoring subtests #1 and # 2

Parameter	Unit		Test 1		Test 2		
		T1	T2	Т3	T1	T2	Т3
E-UTRA RF Channel			1		1		
Number							
BW _{channel}	MHz		10			10	
Correlation Matrix			2x2 Low			1x2 Low	
and Antenna							
Configuration							
Special subframe			6			6	
configuration Note1							
Uplink-downlink			1			1	
configuration Note2							
OCNG Pattern			OP.2 TDD			OP.2 TDD	
defined in D.2 (TDD)							
ρα, ρв			-3			0	
PCFICH_RB	dB		1			4	
PDCCH_RA	dB		-3			0	
PDCCH_RB	dB		-3			0	
PBCH_RA	dB						
PBCH_RB	dB				0		
PSS_RA	dB						
SSS_RA	dB						
PHICH_RA	dB		-3				
PHICH_RB	dB		-3				
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA ^{Note1}	dB						
OCNG_RB ^{Note1}	dB						
SNR Note 8	dB	-1.4	-5.0	-12.8	-4.5	-8.5	-13.7
N_{oc}	dBm/15		-98			-98	
1 oc	kHz						
Propagation condition		ETU 70 Hz AWGN					
Note 1: For the spec	ial subframe co	onfiguratio	n see table	4.2-1 in 30	SPP TS 36	5.211.	
	k-downlink cor						
Note 3: OCNG shall be used such that the resources in cell # 1 are fully allocated and a constant							
total transmitted power spectral density is achieved for all OFDM symbols.							
	esources for Co	or CQI reporting are assigned to the UE prior to the start of time					
period T1.							
Note 5: The timers a	nd layer 3 filter	Itering related parameters are configured prior to the start of time					
period T1.							
Note 7: SNR levels correspond to the signal to noise ratio over the cell-specific reference signal					signal		

Table 7.3.7.5-2: DRX-Configuration for E-UTRAN TDD Radio Link Monitoring out-of-sync in DRX test

The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3

Field	Test1	Test2	Comment
Field	Value	Value	
onDurationTimer	psf2	psf2	As specified in section 6.3.2 in
drx-InactivityTimer	psf1	psf1	3GPP TS 36.331
drx-RetransmissionTimer	sf1	sf1	
longDRX-CycleStartOffset	sf40	sf1280	
shortDRX	disable	Disable	

Table 7.3.7.5-3: TimeAlignmentTimer -Configuration for E-UTRAN TDD Radio Link Monitoring out-ofsync in DRX test

Field	Test1	Test2	Comment
rieid	Value	Value	
TimeAlignmentTimer	infinity	infinity	As specified in section 6.3.2 in 3GPP TS 36.331
sr-ConfigIndex	0	0	For further information see section 6.3.2 in 3GPP TS 36.331 and section10.1 in 3GPP TS 36.213.

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

In test 1 and test 2 during time duration T1 and T2 the UE shall report CQI according to the configured CQI mode (PUCCH 1-0) once every DRX cycle.

In test 1 the UE shall stop reporting the CQI within duration $D_1 = [900]$ ms from the start of the time duration T3.

In test 2 the UE shall stop reporting the CQI within duration $D_1 = [6500]$ ms from the start of the time duration T3.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

7.3.8 E-UTRAN TDD Radio Link Monitoring Test for In-sync in DRX

7.3.8.1 Test purpose

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink radio link quality of the serving cell when DRX is used. This test will partly verify the E-UTRAN TDD radio link monitoring requirements in TS 36.133 section 7.6.

7.3.8.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

7.3.8.3 Minimum conformance requirements

When DRX is used the Q_{out} evaluation period ($T_{Evaluate}Q_{out_DRX}$) and the Q_{in} evaluation period ($T_{Evaluate}Q_{in_DRX}$) is specified in TS 36.133 [4] Table 7.6.2.2-1 will be used.

When the downlink radio link quality estimated over the last $T_{\text{Evaluate}}Q_{\text{out_DRX}}$ [s] period becomes worse than the threshold Q_{out} , Layer 1 of the UE shall send out-of-sync indication to the higher layers within $T_{\text{Evaluate}}Q_{\text{out_DRX}}$ [s] evaluation period. A Layer 3 filter shall be applied to the out-of-sync indications as specified in TS 36.331 [5] clause 5.5.3.2.

When the downlink radio link quality estimated over the last $T_{\text{Evaluate}}Q_{\text{in_DRX}}$ [s] period becomes better than the threshold Q_{in} , Layer 1 of the UE shall send in-sync indications to the higher layers within $T_{\text{Evaluate}}Q_{\text{in_DRX}}$ [s] evaluation period. A L3 filter shall be applied to the in-sync indications as specified in TS 36.331.

The out-of-sync and in-sync evaluations shall be performed as specified in section 4.2.1 in TS 36.213 [8]. Two successive indications from Layer 1 shall be separated by at least max(10 ms, DRX_cycle_length).

Upon start of T310 timer as specified in section 5.3.11 in TS 36.331 [5], the UE shall monitor the link for recovery using the evaluation period and Layer 1 indication interval corresponding to the non-DRX mode until the expiry of T310 timer.

The transmitter power shall be turned off within 40 ms after expiry of T310 counter as specified in TS 36.331 [5] section 5.3.11.

Table 7.3.8.3-1: Qout and Qin Evaluation Period in DRX

DRX cycle length (s)	T _{Evaluate} _Q _{out_DRX} and T _{Evaluate} _Q _{in_DRX} (s) (DRX cycles)		
≤0.04	Note (20)		
0.04 < DRX cycle ≤ 0. 64	Note (10)		
0.64 < DRX cycle ≤ 2.56	Note (5)		
Note: Evaluation period length in time depends on the length of the DRX cycle in use			

The normative reference for this requirement is TS 36.133 [4] clause 7.6.2 and A.7.3.8.

7.3.8.4 Test description

The test consists of one subtest with one cell configured. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 7.3.8.4-1 shows the different time durations and the corresponding variation of the downlink SNR in the active cell to emulate in-sync states.

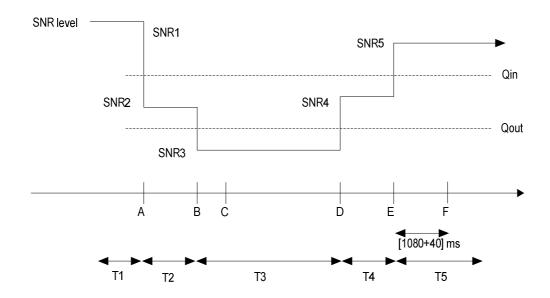


Figure 7.3.8.4-1: SNR variation for in-sync testing in DRX

7.3.8.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1 Connect the SS (node B emulator) and AWGN noise source to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.18.
- 2. The general test parameter settings for the test is set up according to Table 7.3.8.4-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 7.3.8.4.3
- 5. There is one cell specified in this test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 7.3.8.4.1-1: General test parameters for E-UTRAN TDD in-sync in DRX testing

Parai	meter	Unit	Value	Comment		
PCFICH/PDCCH/PHICH parameters			R.6 TDD	As specified in section A.2.2. None of the PDCCH are intended for the UE under test		
OCNG parameters			OP.2 TDD	As specified in section D.2.2.		
Active cell			Cell 1	Cell 1 is on E-UTRA RF channel number 1		
CP length			Normal			
E-UTRA RF Chann	el Number		1	One E-UTRA TDD carrier frequency is used.		
E-UTRA Channel E (BW _{channel})	Bandwidth	MHz	10			
Correlation Matrix a Configuration	and Antenna		1x2 Low	Correlation Matrix and Antenna Configuration are defined in TS 36.521-1 [10] Annex B.2.3.2		
	DCI format		1C	As defined in section 5.3.3.1.4 in TS 36.212		
	Number of Control OFDM symbols		2	In sync threshold Q _{in} and the corresponding hypothetical PDCCH/PCFICH transmission		
In sync transmission	Aggregation level	CCE	4	parameters are as specified in TS 36.133in section and Table		
parameters (Note 1)	ρα, ρв		0	7.6.1-2 respectively.		
(Note 1)	Ratio of PDCCH to RS EPRE		0			
	Ratio of PCFICH to RS EPRE		4			
	DCI format		1A	As defined in section 5.3.3.1.3 in TS 36.212		
Out of our	Number of Control OFDM symbols		2	Out of sync threshold Q _{out} and the corresponding hypothetical PDCCH/PCFICH transmission		
Out of sync transmission parameters	Aggregation level	CCE	8	parameters are as specified in TS 36.133 in section 7.6.1 and		
(Note 1)	ρ _A , ρ _B		0	Table 7.6.1-1 respectively.		
,	Ratio of PDCCH to RS EPRE	dB	4			
	Ratio of PCFICH to RS EPRE	dB	4			
DRX cycle		ms	40	See Table 7.3.8.5-2		
Layer 3 filtering			Enabled	Counters:		
T310 timer		ms	2000	N310 = 1; N311 = 1 T310 is enabled		
T311 timer		ms	1000	T311 is enabled		
Periodic CQI reporting mode			PUCCH 1-0	As defined in table 7.2.2-1 in TS 36.213.		
CQI reporting periodicity		ms	2	Minimum CQI reporting periodicity		
Propagation channel			AWGN			
T1		S	4			
T2		S	1.6			
T3 T4		S S	1.46 0.4			
T5		S	4			

Note 1: PDCCH/PCFICH corresponding to the in-sync and out of sync transmission parameters need not be included in the Reference Measurement Channel.

7.3.8.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CQI reporting in PUCCH 1-0 mode with a reporting periodicity of 1 ms.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 7.3.8.5-1. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.3.8.5-1. T2 starts.
- 4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 7.3.8.5-1. T3 starts.
- 5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 7.3.8.5-1. T4 starts.
- 6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 7.3.8.5-1. T5 starts.
- 7. If the SS stops receiving CQI reports during T1 to T5 once every DRX cycle the number of failed tests is increased by one, otherwise the number of successful tests is increased by one.
- 8. Repeat steps 2-7 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.3.8.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 7.3.8.4.3-1: Common Exception messages for E-UTRAN TDD Radio Link Monitoring Test for Insync in DRX

Default Message Contents				
Common contents of system information				
blocks exceptions				
Default RRC messages and information	Table H.2.4-2			
elements contents exceptions				

Table 7.3.8.4.3-2: CQI-ReportConfig-DEFAULT: Additional E-UTRAN TDD Radio Link Monitoring Test for In-sync in DRX

Derivation Path: 36.331 clause 6.3.2			
Information Element	Value/remark	Comment	Condition
CQI-ReportConfig-DEFAULT ::= SEQUENCE {			
cqi-ReportPeriodic	ON		
cqi-ReportPeriodic ::= CHOICE {			CQI_PERIOD IC
setup SEQUENCE {			
cqi-PUCCH-ResourceIndex	0		
cqi-pmi-ConfigIndex	0	(see Table 7.2.2- 1C in TS 36.213)	
cqi-FormatIndicatorPeriodic CHOICE {			
widebandCQI	NULL		
}			
ri-ConfigIndex	483	(see Table 7.2.2- 1B in TS 36.213)	
simultaneousAckNackAndCQI	FALSE	BOOLEAN	
}			
}			
}			

Condition	Explanation
CQI_PERIODIC	When periodic CQI reporting should be enabled

Table 7.3.8.4.3-3: MAC-MainConfig-RBC: E-UTRAN TDD Radio Link Monitoring test for In-sync in DRX requirement

Derivation Path: TS 36.508 [7] clause 4.8.2.1.5, Table 4.8.2.1.6-1 MAC-MainConfig-RBC					
Information Element	Value/remark	Comment	Condition		
MAC-MainConfig-RBC ::= SEQUENCE {					
ul-SCH-Config SEQUENCE {					
maxHARQ-Tx	n5				
periodicBSR-Timer	sf20				
retxBSR-Timer	sf1280				
ttiBundling	FALSE				
}					
drx-Config CHOICE {			pc_FeatrGrp _5 AND DRX_S		
Setup SEQUENCE {					
onDurationTimer	psf2				
drx-InactivityTimer	psf1				
drx-RetransmissionTimer	sf1				
longDRX-CycleStartOffset CHOICE {		sf40 typical value in real network for real-time services.			
sf40	2				
}					
shortDRX	Not present				
}					
}					
timeAlignmentTimerDedicated	infinity				

Table 7.3.8.4.3-4: *PhysicalConfigDedicated-DEFAULT*: Additional E-UTRAN TDD Radio Link Monitoring test for In-sync in DRX requirement

Derivation Path: TS 36.508 [7] clause 4.8.2.1.6, Table 4.8.2.1.6-1 PhysicalConfigDedicated-DEFAULT					
Information Element	Value/remark	Comment	Condition		
PhysicalConfigDedicated-DEFAULT ::= SEQUENCE {					
schedulingRequestConfig	SchedulingRequest-				
	Config-DEFAULT				
}					

Table 7.3.8.4.3-5: SchedulingRequest-Config-DEFAULT: Additional E-UTRAN TDD Radio Link Monitoring test for In-sync in DRX requirement

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-20 SchedulingRequest-Config-DEFAULT					
Information Element	Value/remark	Comment	Condition		
SchedulingRequest-Config-DEFAULT ::= CHOICE {					
setup SEQUENCE {					
sr-PUCCH-ResourceIndex	41	10 MHz channel bandwidth parameter			
sr-ConfigIndex	0				
dsr-TransMax	n4				
}					
}					

7.3.8.5 Test requirement

Table 7.3.8.5-1: Cell specific test parameters for E-UTRAN TDD (cell # 1) for In-sync radio link monitoring test

Parameter	Unit		Test 1			
		T1	T2	T3	T4	T5
E-UTRA RF Channel Number				1		
BW _{channel}	MHz	10				
Correlation Matrix and				1x2 Low		
Antenna Configuration						
Special subframe				6		
configuration Note1						
Uplink-downlink				1		
configuration ^{Note2}						
OCNG Pattern defined in D.2				OP.2 TDD		
(TDD)						
ρ _A , ρ _B				0		
PCFICH_RB	dB			4		
PDCCH_RA	dB			0		
PDCCH_RB	dB			0		
PBCH_RA	dB					
PBCH_RB	dB					
PSS_RA	dB					
SSS_RA	dB					
PHICH_RA	dB			0		
PHICH_RB	dB					
PDSCH_RA	dB					
PDSCH_RB	dB					
OCNG_RA ^{Note1}	dB					
OCNG_R B ^{Note1} SNR Note 8	dB			10 =		
SNR	dB	-4.5	-8.5	-13.7	-9.7	-4.5
N_{oc}	dBm/15			-98		
	kHz					
Propagation condition		AWGN				
Note 1: For the special subfr					l.	
Note 2: For the uplink-downl						
Note 3: OCNG shall be used					and a consta	ant total
	pectral density is achieved for all OFDM symbols.					
		porting are assigned to the UE prior to the start of time period T1.				
Note 5: The timers and layer T1.	3					
Note 6: The signal contains	PDCCH for UE	Es other than	the device u	nder test as p	art of OCNG	
Note 7: SNR levels correspond to the signal to noise ratio over the cell-specific reference signal REs.						
Note 8: The SNR in time per	iods T1, T2, T	Γ2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and				

Table 7.3.8.5-2: DRX-Configuration for E-UTRAN TDD Radio Link Monitoring in-sync in DRX test

SNR5 respectively in figure 7.3.8.4-1.

Field	Value	Comment
onDurationTimer	psf2	As specified in section 6.3.2 in
drx-InactivityTimer	psf1	3GPP TS 36.331
drx-RetransmissionTimer	sf1	
longDRX-CycleStartOffset	sf40	
shortDRX	disable]

Table 7.3.8.5-3: *TimeAlignmentTimer* -Configuration for E-UTRAN TDD Radio Link Monitoring in-sync in DRX test

Field	Value	Comment
TimeAlignmentTimer	infinity	As specified in section 6.3.2 in 3GPP TS 36.331
sr-ConfigIndex	0	For further information see section 6.3.2 in 3GPP TS 36.331 and section10.1 in 3GPP TS 36.213.

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the entire test from time period T1 to T5 the UE shall report CQI according to the configured CQI mode (PUCCH 1-0) once every DRX cycle.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

8 UE Measurements Procedures

When the UE is in RRC_CONNECTED state on a cell, UE reports measurement information in accordance with the measurement configuration as provided by the System Simulator. To initiate a specific measurement, the System Simulator sends a 'RRC Connection Reconfiguration message' to the UE including a measurement ID and type, a command (setup, modify, release), the measurement objects, the measurement quantity, the reporting quantities and the reporting criteria (periodical/event-triggered), after that the measurement reporting process takes place. In this process when the reporting criteria are fulfilled the UE sends a 'Measurement Report message' to the System Simulator including the measurement ID and the results. The reporting criteria that trigger the UE to send a 'Measurement Report message' to the System Simulator is event-triggered as defined in TS 36.331 [5] clause 5.5.3. The measurement reporting succeeds only if the measurement report is sent within the specified measurement reporting delay period.

The reference channels in this section assume transmission of PDSCH with a maximum number of 5 HARQ transmissions unless otherwise specified. SS transmits PDSCH via PDCCH DCI format 1A for C_RNTI to transmit the DL RMC according to Annex A1. The SS sends downlink MAC padding bits on the DL RMC.

Uplink is configured according to Annex A.3.

Editor's note: For test cases in subclauses 8.1.1, 8.1.2, 8.1.3, 8.2.1 and 8.2.2 the derivation of Test parameters based on the Test tolerances applied in test, is not fully compliant with the corresponding inserts in TR 36.903 [20]. The appropriate analysis and update for TR 36.903 [20] will be provided by RAN5#52 meeting in August 2011.

8.1 E-UTRAN FDD intra frequency measurements

8.1.1 E-UTRAN FDD-FDD intra frequency event triggered reporting under fading propagation conditions in asynchronous cells

8.1.1.1 Test purpose

To verify the UE's ability to make a correct reporting of an event under fading propagation conditions in asynchronous cells within the E-UTRA FDD-FDD intra frequency cell search requirements.

8.1.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

8.1.1.3 Minimum conformance requirements

The measurement reporting delay shall be less than T_{identify intra} in RRC_CONNECTED state.

When no DRX is in use the UE shall be able to identify a new detectable FDD intra frequency cell within

$$T_{\text{identify intra}} = T_{\text{basic identify } E-UTRA_FDD, \, \text{intra}} \cdot \frac{T_{\text{Measurement Period, Intra}}}{T_{\text{Intra}}} \quad \textit{ms}$$

Where:

T_{basic identify E-UTRA FDD, intra} is 800 ms.

T_{Measurement Period,Intra} = 200 ms. The measurement period for intra-frequency RSRP measurements.

 T_{Intra} : This is the minimum time that is available for intra-frequency measurements, during the measurement period with an arbitrarily chosen timing. Time is assumed to be available for performing intra-frequency measurements whenever the receiver is guaranteed to be active on the intra-frequency carrier.

A cell shall be considered detectable when

- RSRP related side condition given in TS 36.133 [4] clause 9.1 are fulfilled for a corresponding Band,
- SCH_RP $|_{dBm} \ge -127$ dBm for Bands 1, 4, 6, 10, 11, 18, 19, 21 and SCH $\hat{E}s/Iot \ge -6$ dB,
- SCH_RP $|_{dBm} \ge -126 \text{ dBm}$ for Band 9 and SCH Ês/Iot $\ge -6 \text{ dB}$,
- SCH_RP $|_{dBm} \ge -125$ dBm for Bands 2, 5, 7, 17 and SCH Ês/Iot ≥ -6 dB,
- SCH_RP SCH_RP |_{dBm}≥ -124 dBm for Bands 3, 8, 12, 13, 14, 20 and SCH Ês/Iot ≥ 6 dB.

Identification of a cell shall include detection of the cell and additionally performing a single measurement with measurement period of $T_{Measurement_Period\ Intra}$. If higher layer filtering is used, an additional cell identification delay can be expected.

In the RRC_CONNECTED state the measurement period for intra-frequency measurements is 200 ms. When no measurement gaps are activated, the UE shall be capable of performing RSRP and RSRQ measurements for 8 identified intra-frequency cells, and the UE physical layer shall be capable of reporting measurements to higher layers with the measurement period of 200 ms. When measurement gaps are activated, the UE shall be capable of performing measurements for at least $Y_{\text{measurement intra}}$ cells, where $Y_{\text{measurement intra}}$ is defined in the following equation. If the UE has identified more than $Y_{\text{measurement intra}}$ cells, the UE shall perform measurements of all identified cells but the reporting rate of RSRP and RSRQ measurements of cells from UE physical layer to higher layers may be decreased.

$$\mathbf{Y}_{\text{measurement intra}} = Floor \left\{ X_{\text{basic measurement FDD}} \cdot \frac{\mathbf{T}_{\text{Intra}}}{\mathbf{T}_{\text{Measurement_Period, Intra}}} \right\} \text{cells}$$

Where:

 $X_{\text{basic measurement FDD}} = 8 \text{ (cells)}.$

 $T_{\text{Measurement Period Intra}} = 200 \text{ ms.}$ The measurement period for intra-frequency RSRP measurements.

 T_{Intra} : This is the time that is available for intra-frequency measurements, during the measurement period with an arbitrarily chosen timing. Time is assumed to be available for performing intra- frequency measurements whenever the receiver is guaranteed to be active on the intra frequency carrier.

The measurement accuracy for all measured cells shall be as specified in TS 36.133 [4] clause 9.1.

Reported measurements contained in event triggered measurement reports shall meet the requirements in TS 36.133 [4] clause 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times \text{TTI}_{\text{DCCH}}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than T _{identify intra} defined in TS 36.133 [4] clause 8.1.2.2.1.2. When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{identify_intra}$ defined in TS 36.133 [4] section 8.1.2.2.1.1 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event, the event triggered measurement reporting delay shall be less than $T_{Measurement_Period\ Intra}$ provided the timing to that cell has not changed more than \pm 50 Ts and the L3 filter has not been used. When L3 filtering is used an additional delay can be expected. The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.2.1 and A.8.1.1.

8.1.1.4 Test description

8.1.1.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and faders and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.15.
- 2. The general test parameter settings are set up according to Table 8.1.1.4.1-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 8.1.1.4.3.
- 5. There is one E-UTRA FDD carrier and two cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 8.1.1.4.1-1: General Test Parameters for E-UTRAN FDD-FDD intra frequency event triggered reporting under fading propagation conditions in asynchronous cells

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference Measurement Channel R.0 FDD	As specified in clause A.1.1
PCFICH/PDCCH/PHICH parameters		DL Reference Measurement Channel R.6 FDD	As specified in clause A.2.1
Active cell		Cell 1	
Neighbour cell		Cell 2	Cell to be identified.
E-UTRA RF Channel Number		1	One FDD carrier frequency is used.
Channel Bandwidth (BW _{channel})	MHz	10	
A3-Offset	dB	-6	
CP length		Normal	
Hysteresis	dB	0	
Time To Trigger	ms	0	
Filter coefficient		0	L3 filtering is not used
DRX			OFF
Time offset between cells	ms	3	Asynchronous cells 3ms or 92160*Ts
T1	S	5	
T2	S	5	

8.1.1.4.2 Test procedure

The test consists of one active cell and one neighbour cell. In the measurement control information it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time durations of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 8.1.1.5-1. Propagation conditions are set according to Annex B clauses B.1.1 and B.2.2. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 8.1.1.5-1.
- 6. UE shall transmit a MeasurementReport message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 802 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

- 7. After the SS receive the MeasurementReport message in step 6) or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A, or
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

8.1.1.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.1.1.4.3-1: Common Exception messages for E-UTRAN FDD-FDD intra frequency event triggered reporting under fading propagation conditions in asynchronous cells test requirement

Default Message Contents			
Common contents of system information			
blocks exceptions			
Default RRC messages and information	Table H.3.1-1		
elements contents exceptions	Table H.3.1-2		
·	Table H.3.1-7		

Table 8.1.1.4.3-2: ReportConfigEUTRA-A3: Additional E-UTRAN FDD-FDD intra frequency event triggered reporting under fading propagation conditions in asynchronous cells test requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table	e 4.6.6-6 ReportConfigEUTRA	-A3	
Information Element	Value/remark	Comment	Condition
ReportConfigEUTRA-A3 ::= SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset	-12 (-6 dB)	-6 is actual value in dB (-12 * 0.5 dB)	
reportOnLeave	FALSE		
}			
}			
hysteresis	0 (0 dB)	0 is actual value in dB (0 * 0.5 dB)	
timeToTrigger	0 (0 ms)		
}			
}			

Table 8.1.1.4.3-3: *MeasResults*: Additional E-UTRAN FDD-FDD intra frequency event triggered reporting under fading propagation conditions in asynchronous cells test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultServiCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListEUTRA }	MeasResultListEUTRA		
}			

Table 8.1.1.4.3-4: MeasResultListEUTRA: Additional E-UTRAN FDD-FDD intra frequency event triggered reporting under fading propagation conditions in asynchronous cells test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListEUTRA ::= SEQUENCE (SIZE (1maxCellReport)) OF SEQUENCE {			
physCellId	PhysicalCellIdentity		
measResult SEQUENCE {			
rsrpResult		Set according to specific test INTEGER(097)	
rsrqResult		Set according to specific test INTEGER(034)	
}			
}			

8.1.1.5 Test requirement

Tables 8.1.1.4.1-1 and 8.1.1.5-1 define the primary level settings including test tolerances for E-UTRAN FDD-FDD event triggered reporting under fading propagation conditions in asynchronous cells test.

Table 8.1.1.5-1: Cell Specific Test requirement Parameters for E-UTRAN FDD-FDD intra frequency event triggered reporting under fading propagation conditions in asynchronous cells

Parameter	Unit	Cel	l 1	Cell 2		
		T1	T2	T1	T2	
E-UTRA RF Channel		1			1	
Number						
BW _{channel}	MHz	10)		10	
OCNG Patterns defined		OP.1	FDD	OF	P.2 FDD	
in D.1.1 (OP.1 FDD)						
and in D.1.2 (OP.2						
FDD)						
PBCH_RA	dB					
PBCH_RB	dB					
PSS_RA	dB					
SSS_RA	dB					
PCFICH_RB	dB					
PHICH_RA	dB			0		
PHICH_PB	dB	0				
PDCCH_RA	dB	Ĭ			Ü	
PDCCH_PB	dB					
PDSCH_RA	dB					
PDSCH_RB	dB					
OCNG_RA ^{Note 1}	dB					
OCNG_RB ^{Note 1}	dB					
\hat{E}_{s}/I_{ot}	dB	6.10	-0.95	-Infinity	-0.95	
$N_{oc}^{ m Note~3}$	dBm/15 KHz	-98				
\hat{E}_s/N_{oc}	dB	6.10	6.10	-Infinity	6.10	
RSRP Note 4	dBm/15 KHz	-91.90	-91.90	-Infinity	-91.90	
SCH_RP Note 4	dBm/15 KHz	-91.90	-91.90	-Infinity	-91.90	
Propagation Condition		ETU70				
Note 1: OCNG shall be	be used such that both cells are fully allocated and a constant total transmitted					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2

Note 3: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{ac} to be fulfilled.

Note 4: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The overall delays measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event A3 triggered measurement report to Cell 2.

The overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_intra}$

$$T_{identify_intra} = T_{basic\ identify\ E-UTRA\ _FDD,\ intra} \cdot \frac{T_{Measurement\ Period,\ Intra}}{T_{Intra}}$$

 $T_{basic_identify_E\text{-}UTRA_FDD,\;intra}\!\!=800\;ms$

 $T_{Measurement_Period,Intra} = 200 \text{ ms}$

 $T_{Intra} = 200 \text{ ms}$

TTI insertion uncertainty = 2 ms

The overall delays measured shall be less than a total of 802 ms in this test case (note: this gives a total of 800 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

8.1.2 E-UTRAN FDD-FDD intra frequency event triggered reporting under fading propagation conditions in synchronous cells

8.1.2.1 Test purpose

To verify the UE's ability to make a correct reporting of an event under fading propagation conditions in synchronous cells within the E-UTRA FDD-FDD intra frequency cell search requirements.

8.1.2.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

8.1.2.3 Minimum conformance requirements

The measurement reporting delay shall be less than T_{identify intra} in RRC_CONNECTED state.

When no DRX is in use the UE shall be able to identify a new detectable FDD intra frequency cell within

$$T_{\text{identify intra}} = T_{\text{basic identify } \textit{E-UTRA_FDD, intra}} \cdot \frac{T_{\text{Measurement Period, Intra}}}{T_{\text{Intra}}} \quad \textit{ms}$$

Where:

T_{basic identify E-UTRA FDD, intra} is 800 ms.

 $T_{\text{Measurement Period,Intra}} = 200 \text{ ms.}$ The measurement period for intra-frequency RSRP measurements.

 T_{Intra} : This is the minimum time that is available for intra-frequency measurements, during the measurement period with an arbitrarily chosen timing. Time is assumed to be available for performing intra-frequency measurements whenever the receiver is guaranteed to be active on the intra-frequency carrier.

A cell shall be considered detectable when

- RSRP related side condition given in TS 36.133 [4] clause 9.1 are fulfilled for a corresponding Band,
- SCH_RP $|_{dBm} \ge -127$ dBm for Bands 1, 4, 6, 10, 11, 18, 19, 21 and SCH Ês/Iot ≥ 6 dB,
- SCH_RP |_{dBm}≥ -126 dBm for Band 9 and SCH Ês/Iot > 6 dB,
- SCH_RP $|_{dBm} \ge -125$ dBm for Bands 2, 5, 7, 17 and SCH Ês/Iot > -6 dB,
- SCH RP SCH RP |_{dBm}≥-124 dBm for Bands 3, 8, 12, 13, 14, 20 and SCH Ês/Iot > 6 dB.

Identification of a cell shall include detection of the cell and additionally performing a single measurement with measurement period of $T_{Measurement_Period\ Intra}$. If higher layer filtering is used, an additional cell identification delay can be expected.

In the RRC_CONNECTED state the measurement period for intra-frequency measurements is 200 ms. When no measurement gaps are activated, the UE shall be capable of performing RSRP and RSRQ measurements for 8 identified intra-frequency cells, and the UE physical layer shall be capable of reporting measurements to higher layers with the measurement period of 200 ms. When measurement gaps are activated, the UE shall be capable of performing measurements for at least $Y_{\text{measurement intra}}$ cells, where $Y_{\text{measurement intra}}$ is defined in the following equation. If the UE has identified more than $Y_{\text{measurement intra}}$ cells, the UE shall perform measurements at least 8 identified intra-frequency cells

but the reporting rate of RSRP and RSRQ measurements of cells from UE physical layer to higher layers may be decreased.

$$\mathbf{Y}_{\text{measurement intra}} = Floor \left\{ X_{\text{basic measurement FDD}} \cdot \frac{\mathbf{T}_{\text{Intra}}}{\mathbf{T}_{\text{Measurement_Period, Intra}}} \right\} \text{cells}$$

Where:

 $X_{\text{basic measurement FDD}} = 8 \text{ (cells)}.$

T_{Measurement Period Intra} = 200 ms. The measurement period for intra-frequency RSRP measurements.

 T_{Intra} : This is the time that is available for intra-frequency measurements, during the measurement period with an arbitrarily chosen timing. Time is assumed to be available for performing intra- frequency measurements whenever the receiver is guaranteed to be active on the intra frequency carrier.

The measurement accuracy for all measured cells shall be as specified in TS 36.133 [4] clause 9.1.

Reported measurements contained in event triggered measurement reports shall meet the requirements in TS 36.133 [4] clause 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than T _{identify intra} defined in TS 36.133 [4] clause 8.1.2.2.1.2. When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{identify_intra}$ defined in TS 36.133 [4] section 8.1.2.2.1.1 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event, the event triggered measurement reporting delay shall be less than $T_{Measurement_Period\ Intra}$ provided the timing to that cell has not changed more than \pm 50 Ts and the L3 filter has not been used. When L3 filtering is used an additional delay can be expected.

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.2.1 and A.8.1.2.

8.1.2.4 Test description

8.1.2.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and faders and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.15.
- 2. The general test parameter settings are set up according to Table 8.1.2.4.1-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 8.1.2.4.3.
- 5. There is one E-UTRA FDD carrier and two cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 8.1.2.4.1-1: General Test Parameters for E-UTRAN FDD-FDD event triggered reporting under fading propagation conditions in synchronous cells

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference Measurement Channel R.0 FDD	As specified in clause A.1.1
PCFICH/PDCCH/PHICH parameters		DL Reference Measurement Channel R.6 FDD	As specified in clause A.2.1
Active cell		Cell 1	
Neighbour cell		Cell 2	Cell to be identified.
E-UTRA RF Channel Number		1	One FDD carrier frequency is used.
Channel Bandwidth (BW _{channel})	MHz	10	
A3-Offset	dB	-6	
CP length		Normal	
Hysteresis	dB	0	
Time To Trigger	ms	0	
Filter coefficient		0	L3 filtering is not used
DRX		DRX_L	As specified in Table 8.1.2.5-2
Time offset between cells	μs	3	Synchronous cells
			3μs or 92*Ts
T1	S	5	
T2	S	5	

8.1.2.4.2 Test procedure

The test consists of one active cell and one neighbour cell. In the measurement control information it is indicated to the UE that event-triggered reporting with Event A3 is used. PDCCHs indicating new transmissions should be sent continuously to ensure that the UE would not enter the DRX state. The test consists of two successive time periods, with time durations of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 8.1.2.5-1. Propagation conditions are set according to Annex B clauses B.1.1 and B.2.2.T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 8.1.2.5-1. T2 starts.
- 6. UE shall transmit a MeasurementReport message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 802 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.
- 7. After the SS receive the MeasurementReport message in step 6) or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.
- 9. After the RRC connection release, the SS:
- transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A,
- switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10.Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

8.1.2.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.1.2.4.3-1: Common Exception messages for E-UTRAN FDD-FDD intra frequency event triggered reporting under fading propagation conditions in synchronous cells test requirement

Default Message Contents			
Common contents of system information			
blocks exceptions			
Default RRC messages and information	Table H.3.1-1		
elements contents exceptions	Table H.3.1-2		
·	Table H.3.1-7		
	Table H.3.6-2		

Table 8.1.2.4.3-2: ReportConfigEUTRA-A3: Additional E-UTRAN FDD-FDD intra frequency event triggered reporting under fading propagation conditions in synchronous cells test requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table	4.6.6-6 ReportConfigEUTRA	-A3	
Information Element	Value/remark	Comment	Condition
ReportConfigEUTRA-A3 ::= SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset	-12 (-6 dB)	-6 is actual value in dB (-12 * 0.5 dB)	
reportOnLeave	FALSE		
}			
hysteresis	0 (0 dB)	0 is actual value in dB (0 * 0.5 dB)	
timeToTrigger	0 (0 ms)		
}			
}			

Table 8.1.2.4.3-3: *MeasResults*: Additional E-UTRAN FDD-FDD intra frequency event triggered reporting under fading propagation conditions in synchronous cells test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCell CHOICE {			
measResultListEUTRA }	MeasResultListEUTRA		
}			

Table 8.1.2.4.3-4: MeasResultListEUTRA: Additional E-UTRAN FDD-FDD intra frequency event triggered reporting under fading propagation conditions in synchronous cells test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListEUTRA ::= SEQUENCE (SIZE (1maxCellReport)) OF SEQUENCE {			
physCellId	PhysicalCellIdentity		
measResult SEQUENCE {			
rsrpResult		Set according to specific test INTEGER(097)	
rsrqResult		Set according to specific test INTEGER(034)	
}			
}			

8.1.2.5 Test requirement

Tables 8.1.2.4.1-1, 8.1.2.5-1, and 8.1.2.5-2 define the primary level settings including test tolerances for E-UTRAN FDD-FDD event triggered reporting under fading propagation conditions in synchronous cells test.

Table 8.1.2.5-1: Cell Specific Test requirement Parameters for E-UTRAN FDD-FDD event triggered reporting under fading propagation conditions in synchronous cells

Parameter	Unit	Cell 1			Cell 2
		T1	T2	T1	T2
E-UTRA RF Channel		1	1		1
Number					
BW _{channel}	MHz	10)		10
OCNG Patterns defined		OP.1	FDD	OF	P.2 FDD
in D.1.1 (OP.1 FDD)					
and in D.1.2 (OP.2					
FDD)					
PBCH_RA	dB				
PBCH_RB	dB				
PSS_RA	dB				
SSS_RA	dB				
PCFICH_RB	dB				
PHICH_RA	dB				
PHICH_RB	dB	0			0
PDCCH_RA	dB] "			U
PDCCH_RB	dB				
PDSCH_RA	dB				
PDSCH_RB	dB				
OCNG_RA ^{Note 1}	dB				
OCNG RB ^{Note 1}	dB	1			

\hat{E}_{s}/I_{ot}	dB	6.10	-0.95	-Infinity	-0.95
N_{oc} Note 3	dBm/15 KHz	-98			
\hat{E}_s/N_{oc}	dB	6.10	6.10	-Infinity	6.10
RSRP Note 4	dBm/15 KHz	-91.90	-91.90	-Infinity	-91.90
SCH_RP Note 4	dBm/15 KHz	-91.90	-91.90	-Infinity	-91.90
Propagation Condition		ETU70			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 3: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 4: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.1.2.5-2: Reference DRX-Configuration to be used in E-UTRAN FDD-FDD event triggered reporting under fading propagation conditions in synchronous cells

Parameter	Value	Comments			
Reference configuration	DRX_L	As defined in 4.8.2.1.5 in TS 36.508 [7.]			
onDurationTimer	psf6				
drx-InactivityTimer	psf1920				
drx-RetransmissionTimer	sf16				
longDRX-CycleStartOffset	sf1280, 0				
shortDRX	disabled				
Note: For further information see section 6.3.2 in 3GPP TS 36.331 [5].					

The overall delays measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event A3 triggered measurement report to Cell 2.

The overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify intra}$

$$T_{identify_intra} = \ T_{basic\ identify\ \textit{E-UTRA}_FDD,\ intra} \cdot \frac{T_{Measurement\ Period,\ Intra}}{T_{Intra}}$$

T_{basic_identify_E-UTRA_FDD, intra}= 800 ms

 $T_{Measurement_Period,Intra} = 200 \text{ ms}$

 $T_{Intra}\!=200\;ms$

TTI insertion uncertainty = 2 ms

The overall delays measured shall be less than a total of 802 ms in this test case (note: this gives a total of 800 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

8.1.3 E-UTRAN FDD-FDD intra frequency event triggered reporting under fading propagation conditions in synchronous cells with DRX

8.1.3.1 Test purpose

To verify the UE's ability to make a correct reporting of an event in DRX under fading propagation conditions in synchronous cells within the E-UTRA FDD-FDD intra frequency cell search requirements.

8.1.3.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

8.1.3.3 Minimum conformance requirements

When DRX is in use the UE shall be able to identify a new detectable FDD intra frequency cell within $T_{identify\ intra}$ as defined in table 8.1.2.2.1.2-1 of TS 36.133 [4] clause 8.1.2.2.1.2.

A cell shall be considered detectable when

- RSRP related side condition given in TS 36.133 [4] clause 9.1 are fulfilled for a corresponding Band,
- SCH_RP $|_{dBm} \ge -127$ dBm for Bands 1, 4, 6, 10, 11, 18, 19, 20 and SCH £s/Iot ≥ 6 dB,
- SCH_RP |_{dBm}≥ -126 dBm for Band 9 and SCH Ês/Iot > 6 dB,
- SCH_RP $|_{dBm} \ge -125$ dBm for Bands 2, 5, 7, 17 and SCH Ês/Iot > -6 dB,
- SCH_RP SCH_RP |_{dBm}≥-124 dBm for Bands 3, 8, 12, 13, 14, 20 and SCH Ês/Iot > 6 dB.

In the RRC_CONNECTED state with DRX cycles of 80 ms or greater the measurement period for intra frequency measurements is $T_{measure_intra}$ as defined in table 8.1.2.2.1.2-2 of TS 36.133 [4] clause 8.1.2.2.1.2. The UE shall be capable of performing RSRP measurement for 8 identified intra frequency cells, and the UE physical layer shall be capable of reporting measurements to higher layers with the measurement period of $T_{measure_intra}$.

The measurement accuracy for all measured cells shall be as specified in TS 36.133 [4] clause 9.1.

Reported measurements contained in event triggered measurement reports shall meet the requirements in TS 36.133 [4] clause 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than T $_{identify\ intra}$ defined in TS 36.133 [4] clause 8.1.2.2.1.2. When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{identify_intra}$ defined in TS 36.133 [4] section 8.1.2.2.1.1 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event, the event triggered measurement reporting delay shall be less than $T_{Measurement_Period\ Intra}$ provided the timing to that cell has not changed more than \pm 50 Ts and the L3 filter has not been used. When L3 filtering is used an additional delay can be expected.

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.2.1 and A.8.1.3.

8.1.3.4 Test description

8.1.3.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and faders and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.15.
- 2. The general test parameter settings are set up according to Table 8.1.3.4.1-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 8.1.3.4.3.
- 5. There is one E-UTRA FDD carrier and two cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 8.1.3.4.1-1: General Test Parameters for E-UTRAN FDD-FDD intra-frequency event triggered reporting under fading propagation conditions in synchronous cells when DRX is used

Parameter	Unit	Value		Comment
		Test 1	Test 2	
PDSCH parameters		DL Reference Measurement Channel R.0 FDD		As specified in section A.1.1
PCFICH/PDCCH/PHICH		DL Reference	Measurement	As specified in section A.2.1
parameters		Channel	R.6 FDD	
Active cell		Ce	II 1	
Neighbour cell		Ce	II 2	Cell to be identified.
E-UTRA RF Channel Number		,	1	One FDD carrier frequency is used.
Channel Bandwidth (BW _{channel})	MHz	10		
A3-Offset	dB	-6		
CP length		Normal		
Hysteresis	dB	0		
Time To Trigger	dB	0		
Filter coefficient		()	L3 filtering is not used
DRX		ON		DRX related parameters are defined in Table 8.1.3.5-2
Time offset between cells		3 μs		Synchronous cells 3μs or 92*Ts
T1	S	5		
T2	S	5	30	

8.1.3.4.2 Test procedure

The test consists of one active cell and one neighbour cell. In the measurement control information it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time durations of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

In Test 1 when DRX = 40 ms is used, UE needs to be provided at least once every 500 ms with new Timing Advance Command MAC control element to restart the Timer Alignment Timer to keep the UE uplink time alignment. Furthermore, the UE is allocated with PUSCH resource at every DRX cycle. In Test 2 when DRX = 1280 ms is used, the uplink time alignment is not maintained and the UE needs to use RACH to obtain uplink allocation for measurement reporting.

1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.

- 2. Set the parameters according to T1 in Table 8.1.3.5-1. Propagation conditions are set according to Annex B clauses B.1.1 and B.2.2. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 8.1.3.5-1 and 8.1.3.5-2.
- 6. UE shall transmit a MeasurementReport message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 842 ms for Test 1 or less than 26882 ms for Test 2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.
- 7. After the SS receive the MeasurementReport message in step 6) or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A, or
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.
- 11. Repeat step 1-10 for each sub-test in Table 8.1.3.4.1-1 as appropriate.

8.1.3.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.1.3.4.3-1: Common Exception messages for E-UTRAN FDD-FDD intra frequency event triggered reporting in DRX under fading propagation conditions test 1 and 2 requirements

Default Message Contents				
Common contents of system information				
blocks exceptions				
Default RRC messages and information	Table H.3.1-2			
elements contents exceptions	Table H.3.1-7			
	Table H.3.7-1			
	Table H.3.7-2			
	Table H.3.7-3			

Table 8.1.3.4.3-2: RRCConnectionReconfiguration: Additional E-UTRAN FDD-FDD intra frequency event triggered reporting with in DRX under fading propagation conditions test 1 and 2 requirements

Derivation Path: TS 36.508 [7] clause 4.6.1, Table 4.6.1-8 RRCConnectionReconfiguration					
Information Element	Value/remark	Comment	Condition		
RRCConnectionReconfiguration ::= SEQUENCE {					
rrc-TransactionIdentifier	RRC-				
	TransactionIdentifier-DL				
criticalExtensions CHOICE {					
c1 CHOICE{					
rrcConnectionReconfiguration-r8 SEQUENCE {					
measConfig	MeasConfig -DEFAULT				
radioResourceConfigDedicated	RadioResourceConfigDed				
	icated-HO				
}					
}					
}					
}					

Table 8.1.3.4.3-3: ReportConfigEUTRA-A3: Additional E-UTRAN FDD-FDD intra frequency event triggered reporting with in DRX under fading propagation conditions test 1 and 2 requirements

Information Element	Value/remark	Comment	Condition
ReportConfigEUTRA-A3 ::= SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventide CHOICE {			
eventA3 SEQUENCE {			
a3-Offset	-12 (-6 dB)	-6 is actual value in dB (-12 * 0.5 dB)	
reportOnLeave	FALSE		
}			
}			
hysteresis	0 (0 dB)	0 is actual value in dB (0 * 0.5 dB)	
timeToTrigger	0 (0 ms)		
}			

Table 8.1.3.4.3-4: SchedulingRequest-Config-DEFAULT: Additional E-UTRAN FDD-FDD intrafrequency event triggered reporting in DRX under fading propagation conditions test 1 and 2 requirements

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-20 SchedulingRequest-Config-DEFAULT						
Information Element	Value/remark	Comment	Condition			
SchedulingRequest-Config-DEFAULT ::= CHOICE {						
setup SEQUENCE {						
sr-PUCCH-ResourceIndex	41	10 MHz channel bandwidth parameter				
sr-ConfigIndex	0					
dsr-TransMax	n4					
}						
}						

Table 8.1.3.4.3-5: *MeasResults*: Additional E-UTRAN FDD-FDD intra frequency event triggered reporting in DRX under fading propagation conditions test 1 and 2 requirements

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
}			

Table 8.1.3.4.3-6: *MeasResultListEUTRA*: Additional E-UTRAN FDD-FDD intra frequency event triggered reporting in DRX under fading propagation conditions test 1 and 2 requirements

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListEUTRA ::= SEQUENCE (SIZE (1maxCellReport)) OF MeasResultEUTRA {			
physCellId	PhysCellId		
measResult SEQUENCE {			
rsrpResult		Set according to specific test INTEGER(097)	
rsrqResult		Set according to specific test INTEGER(034)	
}			
}			

8.1.3.5 Test requirement

Tables 8.1.3.4.1-1, 8.1.3.5-1, 8.1.3.5-2 and 8.1.3.5-3 define the primary level settings including test tolerances for E-UTRAN FDD-FDD intra-frequency event triggered reporting under fading propagation conditions in synchronous cells when DRX is used test.

Table 8.1.3.5-1: Cell Specific Test requirement Parameters for E-UTRAN FDD-FDD intra-frequency event triggered reporting in DRX under fading propagation conditions

Parameter	Unit	Ce	Cell 1		Cell 2	
		T1	T2	T1	T2	
E-UTRA RF Channel		1			1	
Number						
BW _{channel}	MHz		0		10	
OCNG Patterns		OP.1	FDD	OP	.2 FDD	
defined in D.1.1 (OP.1						
FDD) and in D.1.2						
(OP.2 FDD)						
PBCH_RA	dB					
PBCH_RB	dB					
PSS_RA	dB					
SSS_RA	dB					
PCFICH_RB	dB					
PHICH_RA	dB	0		0		
PHICH_RB	dB					
PDCCH_RA	dB					
PDCCH_RB	dB					
PDSCH_RA	dB					
PDSCH_RB	dB					
OCNG_RA ^{Note 1}	dB					
OCNG_RB ^{Note 1}	dB					
\hat{E}_{s}/I_{ot}	dB	6.10	-0.95	-Infinity	-0.95	
$N_{oc}^{ m Note~2}$	dBm/15 KHz	-98				
\hat{E}_s/N_{oc}	dB	6.10	6.10	-Infinity	6.10	
RSRP Note 3	dBm/15 KHz	-91.90	-91.90	-Infinity	-91.90	
SCH_RP Note 3	dBm/15 KHz	-91.90	-91.90	-Infinity	-91.90	
Propagation Condition		ETU70				
	ised such that both	cells are fully allocated and a constant total transmitted power				

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{ac} to be fulfilled.

Note 3: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.1.3.5-2: DRX Configuration to be used for E-UTRAN FDD-FDD intra-frequency event triggered reporting in DRX under fading propagation conditions

Field	Test1	Test2	Comment
Tiold	Value	Value	
onDurationTimer	psf1	psf1	As specified in section 6.3.2 in
drx-InactivityTimer	psf1	psf1	3GPP TS 36.331 [5]
drx-RetransmissionTimer	sf1	sf1	
longDRX-CycleStartOffset	sf40	sf1280	
shortDRX	disable	disable	

Table 8.1.3.5-3: TimeAlignmentTimer and sr-ConfigIndex-Configuration to be used for E-UTRAN FDD-FDD intra-frequency event triggered reporting in DRX under fading propagation conditions

Field	Test1	Test2	Comment
	Value	Value	

TimeAlignmentTimer	sf500	sf500	As specified in section 6.3.2 in 3GPP TS 36.331 [5]
sr-ConfigIndex	0	0	For further information see section 6.3.2 in 3GPP TS 36.331 and section10.1 in 3GPP TS 36.213 [8].

In Test 1 when DRX cycle length = 40 ms is used, the overall delay measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event A3 triggered measurement report to Cell 2 on PUSCH.

In Test 2 when DRX cycle length = 1280 ms is used, the overall delay measured is defined as the time from the beginning of time period T2, to the moment the UE starts to send preambles on the PRACH for Scheduling Request (SR) to obtain allocation to send the measurement report to Cell 2 on PUSCH.

For both tests:

The overall delay measured may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

NOTE 1: The actual overall delays measured in the test may be up to one DRX cycle higher than the measurement reporting delays above because UE is allowed to delay the initiation of the measurement reporting procedure to the next until the Active Time.

NOTE 2: In order to calculate the rate of correct events the system simulator shall verify that it has received correct Event A3 measurement report.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The overall delay measured when DRX cycle length is 40 ms test requirement is expressed as:

Overall delay measured = measurement reporting delay + TTI insertion uncertainty + DRX cycle length

 $Measurement \ reporting \ delay = T_{identify_intra}$

 $T_{identify\ intra}$ = 800 ms. When DRX cycle length is 40 ms then the $T_{identify\ intra}$ is 0.8 s.

TTI insertion uncertainty = 2 ms

DRX cycle length = 40 ms

The overall delay measured when DRX cycle length is 40 ms shall be less than a total of 842 ms.

The overall delay measured when DRX cycle length is 1280 ms test requirement is expressed as:

Overall delay measured = measurement reporting delay + TTI insertion uncertainty + DRX cycle length

Measurement reporting delay = $T_{identify\ intra}$

 $T_{identify\ intra} = 25600\ ms$. When DRX cycle length is 1280 ms then the $T_{identify\ intra}$ is 20 x 1280 ms.

TTI insertion uncertainty = 2 ms

DRX cycle length = 1280 ms

The overall delay measured when DRX cycle length is 1280 ms shall be less than a total of 26882 ms.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

8.1.4 Void

8.2 E-UTRAN TDD intra frequency measurements

8.2.1 E-UTRAN TDD-TDD intra-frequency event triggered reporting under fading propagation conditions in synchronous cells

8.2.1.1 Test purpose

To verify the UE's ability to make a correct reporting of an event under fading propagation conditions in synchronous cells within the E-UTRA TDD-TDD intra frequency cell search requirements.

8.2.1.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

8.2.1.3 Minimum conformance requirements

When no DRX is in use the UE shall be able to identify a new detectable TDD intra frequency cell within

$$T_{\text{identify intra}} = T_{\text{basic identify } E-UTRA_TDD, \text{ intra}} \cdot \frac{T_{\text{Measurement Period, Intra}}}{T_{\text{Intra}}} \quad \textit{ms}$$

where

T_{basic identify E-UTRA TDD, intra} is 800 ms

A cell shall be considered detectable when

- RSRP related side condition given in TS 36.133 [4] Section 9.1 are fulfilled for a corresponding Band,
- SCH_RP $|_{dBm} \ge -127$ dBm for Bands 33, 34, 35, 36, 37, 38, 39, 40, 42, 43 and SCH $\hat{E}s/Iot \ge -6$ dB
- SCH_RP $|_{dBm} \ge -126 dBm$ for Band 41 and SCH Ês/Iot $\ge -6 dB$.

T_{Measurement Period Intra} = 200 ms. The measurement period for Intra frequency RSRP measurements.

 T_{Intra} : This is the minimum time that is available for intra frequency measurements, during the measurement period with an arbitrarily chosen timing. Time is assumed to be available for performing intra frequency measurements whenever the receiver is guaranteed to be active on the intra frequency carrier.

Identification of a cell shall include detection of the cell and additionally performing a single measurement with measurement period of $T_{Measurement_Period\ Intra}$. If higher layer filtering is used, an additional cell identification delay can be expected.

In the RRC_CONNECTED state the measurement period for intra frequency measurements is 200 ms. When no measurement gaps are activated, the UE shall be capable of performing RSRP measurements for 8 identified-intra-frequency cells, and the UE physical layer shall be capable of reporting measurements to higher layers with the measurement period of 200 ms. When measurement gaps are activated the UE shall be capable of performing measurements for at least $Y_{\text{measurement intra}}$ cells , where $Y_{\text{measurement intra}}$ is defined in the following equation. If the UE has identified more than $Y_{\text{measurement intra}}$ cells, the UE shall perform measurements at least 8 identified intra-frequency cells but the reporting rate of RSRP measurements of cells from UE physical layer to higher layers may be decreased.

$$\mathbf{Y}_{\text{measurement intra}} = Floor \left\{ X_{\text{basic measurement TDD}} \cdot \frac{\mathbf{T}_{\text{Intra}}}{\mathbf{T}_{\text{Measurement_Period, Intra}}} \right\} \text{cells}$$

where

 $X_{\text{basic measurement TDD}} = 8 \text{ (cells)}$

 $T_{Measurement\ Period\ Intra} = 200\ ms$. The measurement period for Intra frequency RSRP measurements.

 T_{Intra} : This is the minimum time that is available for intra frequency measurements, during the measurement period with an arbitrarily chosen timing. Time is assumed to be available for performing intra frequency measurements whenever the receiver is guaranteed to be active on the intra frequency carrier.

The measurement accuracy for all measured cells shall be as specified in TS 36.133 [4] sub-clause 9.1.

Reported measurements contained in periodically triggered measurement reports shall meet the requirements in TS 36.133 [4] section 9.

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements in TS 36.133 [4] section 9.

Reported measurements contained in event triggered measurement reports shall meet the requirements in TS 36.133 [4] section 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than T $_{identify\ intra}$ defined in TS 36.133 [4] Section 8.1.2.2.2.1 When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{identify_intra}$ defined in TS 36.133 [4] section 8.1.2.2.1.1 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event, the event triggered measurement reporting delay shall be less than $T_{Measurement_Period\ Intra}$ provided the timing to that cell has not changed more than \pm 50 Ts and the L3 filter has not been used. When L3 filtering is used an additional delay can be expected

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.2.2 and A.8.1.2.

8.2.1.4 Test description

8.2.1.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and faders and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.15.
- 2. The general test parameter settings are set up according to Table 8.2.1.4.1-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 8.2.1.4.3.
- 5. There is one E-UTRA TDD carrier and two cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 8.2.1.4.1-1: General test parameters for E-UTRAN TDD-TDD intra-frequency event triggered reporting under fading propagation conditions in synchronous cells

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference Measurement Channel R.0 TDD	As specified in section A.1.2
PCFICH/PDCCH/PHICH		DL Reference Measurement	As specified in section A.2.2
parameters		Channel R.6 TDD	
Active cell		Cell 1	
Neighbour cell		Cell 2	Cell to be identified.
E-UTRA RF Channel Number		1	One TDD carrier frequency is used.
Channel Bandwidth (BW _{channel})	MHz	10	
A3-Offset	dB	-6	
CP length		Normal	
Special subframe configuration		6	As specified in table 4.2-1 in TS 36.211.
			The same configuration in both cells
Uplink-downlink configuration		1	As specified in table 4.2-2 in TS 36.211.
			The same configuration in both cells
Hysteresis	dB	0	
Time To Trigger	S	0	
Filter coefficient		0	L3 filtering is not used
DRX		DRX_L	As specified in Table 8.2.1.5-2
Time offset between cells	μs	3	Synchronous cells
	ľ		3µs or 92*Ts
T1	s	5	
T2	S	5	

8.2.1.4.2 Test procedure

The test consists of one active cell and one neighbour cell. In the measurement control information it is indicated to the UE that event-triggered reporting with Event A3 is used. PDCCHs indicating new transmissions or retransmissions should be sent continuously to ensure that the UE would not enter the DRX state. The test consists of two successive time periods, with time durations of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 8.2.1.5-1. Propagation conditions are set according to Annex B clauses B.1.1 and B.2.2.T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 8.2.1.5-1.
- 6. UE shall transmit a MeasurementReport message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 802 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.
- 7. After the SS receives the MeasurementReport message in step 6 or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A,
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

8.2.1.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.2.1.4.3-1: Common Exception messages for E-UTRAN TDD-TDD intra frequency event triggered reporting under fading propagation conditions in synchronous cells test requirement

Default Message Contents			
Common contents of system information			
blocks exceptions			
Default RRC messages and information	Table H.3.1-1		
elements contents exceptions	Table H.3.1-2		
·	Table H.3.1-7		
	Table H.3.6-2		

Table 8.2.1.4.3-2: ReportConfigEUTRA-A3: Additional E-UTRAN TDD-TDD intra frequency event triggered reporting under fading propagation conditions in synchronous cells test requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6	6.6-6 ReportConfigEUTRA-A	.3	
Information Element	Value/remark	Comment	Condition
ReportConfigEUTRA-A3 ::= SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset	-12 (-6 dB)	-6 is actual value in dB (-12 * 0.5 dB)	
reportOnLeave	FALSE		
}			
}			
Hysteresis	0 (0 dB)	0 is actual value in dB (0 * 0.5 dB)	
timeToTrigger	0 (0 ms)	,	
}			
}			

Table 8.2.1.4.3-3: MeasResults: Additional E-UTRAN TDD-TDD intra frequency event triggered reporting under fading propagation conditions in synchronous cells test requirement

Derivation Path: 36.331 clause 6.3.5 Information Element	Value/remark	Comment	Condition
	value/reiliark	Comment	Condition
MeasResults::= SEQUENCE {			
measld	1		
measResultServCell SEQUENCE {		Report Cell 1	
rsrpResult		Set according to	
•		specific test	
rsrqResult		Set according to	
·		specific test	
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
}			
}			

Table 8.2.1.4.3-4: MeasResultListEUTRA: Additional E-UTRAN TDD-TDD intra frequency event triggered reporting under fading propagation conditions in synchronous cells test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListEUTRA ::= SEQUENCE (SIZE		Report Cell 2	
(1maxCellReport)) OF SEQUENCE {			
physCellId	PhysCellId of the Cell 2		
measResult SEQUENCE {			
rsrpResult		Set according to	
		specific test	
rsrqResult		Set according to	
		specific test	
}			
<u> </u>			

Test requirement 8.2.1.5

Tables 8.2.1.4.1-1, 8.2.1.5-1, and 8.2.1.5-2 define the primary level settings including test tolerances for E-UTRAN TDD-TDD event triggered reporting under fading propagation conditions in synchronous cells test.

Table 8.2.1.5-1: Cell specific test parameters for E-UTRAN TDD-TDD intra-frequency event triggered reporting under fading propagation conditions in synchronous cells

Parameter	Unit	Unit Cell 1 Cell 2		Cell 2		
		T1	T1 T2		T2	
E-UTRA RF Channel		,			T1 T2	
Number						
BW _{channel}	MHz	1	0		10	
OCNG Pattern defined						
in A.2.1 (OP.1 TDD)		OP.1	TDD	OP	OP.2 TDD	
and in A.2.2 (OP.2)						
PBCH_RA	dB					
PBCH_RB	dB					
PSS_RA	dB					
SSS_RA	dB					
PCFICH_RB	dB					
PHICH_RA	dB					
PHICH_RB	dB				0	
PDCCH_RA	dB	0		O		
PDCCH_RB	dB					
PDSCH_RA	dB					
PDSCH_RB	dB					
OCNG_RA ^{Note 1}	dB					
OCNG_RB ^{Note 1}	dB					
N_{oc}	dBm/15 kHz					
RSRP	dBm/15 kHz	-91.40	-91.40 -91.40		-91.40	
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	dB	6.60	-0.86	-Infinity -Infinity	-0.86	
SCH_RP	dBm/15 kHz	-91.40 -91.40		-Infinity	-91.40	
\hat{E}_s/N_{oc}	dB	6.60	6.60	-Infinity	6.60	
Propagation Condition		ETU70				

OCNG shall be used such that both cells are fully allocated and a constant total transmitted power Note 1: spectral density is achieved for all OFDM symbols.

The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2:

Table 8.2.1.5-2: Reference DRX-Configuration to be used in E-UTRAN TDD-TDD event triggered reporting under fading propagation conditions in synchronous cells

Parameter	Value	Comments	
Reference configuration	DRX_L	As defined in 4.8.2.1.5 in TS 36.508 [7.]	
onDurationTimer	psf6		
drx-InactivityTimer	psf1920		
drx-RetransmissionTimer	sf16		
longDRX-CycleStartOffset	sf1280, 0		
shortDRX	disabled		
Note: For further information see section 6.3.2 in 3GPP TS 36.331 [5].			

The overall delays measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event A3 triggered measurement report to Cell 2.

The overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_intra}$

$$T_{identify_intra} = \ T_{basic\ identify\ \textit{E-UTRA_TDD},\ intra} \cdot \frac{T_{Measurement\ Period,\ Intra}}{T_{Intra}}$$

$$T_{basic_identify_E\text{-}UTRA_TDD,\;intra}\!\!=800\;ms$$

$$T_{Measurement_Period,Intra} = 200 \text{ ms}$$

$$T_{Intra} = 200 \text{ ms}$$

TTI insertion uncertainty = 2 ms

The overall delays measured shall be less than a total of 802 ms in this test case (note: this gives a total of 800 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

8.2.2 E-UTRAN TDD-TDD intra-frequency event triggered reporting under fading propagation conditions in synchronous cells with DRX

8.2.2.1 Test purpose

To verify the UE's ability to make a correct reporting of an event under fading propagation conditions in synchronous cells with DRX within the E-UTRA TDD-TDD intra frequency cell search in DRX requirements.

8.2.2.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

8.2.2.3 Minimum conformance requirements

Note: The state when no DRX is used is assumed to be the one in which the DRX Inactivity Timer is running, and the state when DRX is used is assumed to be otherwise for this performance requirement.

When DRX is in use the UE shall be able to identify a new detectable TDD intra frequency cell within $T_{identify_intra}$ as shown in table 8.2.2.3-1

Table 8.2.2.3-1: Requirement to identify a newly detectable TDD intra frequency cell

DRX cycle length (s)	T _{identify_intra} (s) (DRX cycles)	
≤0.04	0.8 (Note1)	
0.04 <drx-< td=""><td>Note2 (40)</td></drx-<>	Note2 (40)	
cycle≤0.08		
0.08 <drx-< td=""><td>Note2(20)</td></drx-<>	Note2(20)	
cycle≤2.56		
Note1: Number of DRX cycle		
depends upon the DRX		
cycle in use		
Note2: Time depends upon the DRX		
cycle in use		

A cell shall be considered detectable when

- RSRP related side condition given in TS 36.133 [4] Section 9.1 are fulfilled for a corresponding Band,
- SCH_RP $|_{dBm}$ > -127 dBm for Bands 33, 34, 35, 36, 37, 38, 39, 40, 42, 43 and SCH \hat{E} s/Iot > -6 dB.
- SCH RP $|_{dBm}$ > -126 dBm Band 41 and SCH \hat{E} s/Iot > 6 dB.

In the RRC_CONNECTED state with DRX cycles of 80ms or greater the measurement period for intra frequency measurements is $T_{measure_intra}$ as shown in table 8.2.2.3-2. The UE shall be capable of performing RSRP measurements for TS 45.008 [15] identified-intra-frequency cells and the UE physical layer shall be capable of reporting measurements to higher layers with the measurement period of $T_{measure_intra}$.

Table 8.2.2.3-2: Requirement to measure TDD intra frequency cells

DRX cycle length (s)	T _{measure_intra} (s) (DRX cycles)		
≤0.04	0.2 (Note1)		
0.04 <drx-< td=""><td>Note2 (5)</td></drx-<>	Note2 (5)		
cycle≤2.56			
Note1: Number of DRX cycle			
depends upon the DRX			
cycle in use.			
Note2: Time depends upon the DRX			
cycle in use.			

The measurement accuracy for all measured cells shall be as specified in TS 36.133 [4] sub-clause 9.1.

Reported measurements contained in periodically triggered measurement reports shall meet the requirements in TS 36.133 [4] section 9.

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements in TS 36.133 [4] section 9.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in TS 36.133 [4] section 8.1.2.2.2.1.3 Event Triggered Reporting.

Reported measurements contained in event triggered measurement reports shall meet the requirements in TS 36.133 [4] section 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than T $_{identify_intra}$ defined in TS 36.133 [4] Section 8.1.2.2.2 When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{identify_intra}$ defined in TS 36.133 [4] section 8.1.2.2.1.1 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event, the event triggered measurement reporting delay shall be less than $T_{Measurement_Period\ Intra}$ provided the timing to that cell has not changed more than \pm 50 Ts and the L3 filter has not been used. When L3 filtering is used an additional delay can be expected

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.2.2 and A.8.2.2.

8.2.2.4 Test description

8.2.2.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and faders and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.15.
- 2. The general test parameter settings are set up according to Table 8.2.2.4.1-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 8.2.2.4.3.
- 5. There is one E-UTRA TDD carrier and two cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 8.2.2.4.1-1: General test parameters for E-UTRAN TDD-TDD intra-frequency event triggered reporting under fading propagation conditions in synchronous cells when DRX is used

Parameter	Unit	Value		Comment
		Test 1	Test 2	
PDSCH parameters		DL Reference	Measurement	As specified in section A.1.2
		Channel R.0 T	DD D	·
PCFICH/PDCCH/PHICH		DL Reference	Measurement	As specified in section A.2.2
parameters		Channel R.6 T	DD	
Active cell		Cell 1		
Neighbour cell		Cell 2		Cell to be identified.
E-UTRA RF Channel Number		1		One TDD carrier frequency is used.
Channel Bandwidth (BW _{channel})	MHz	10		
A3-Offset	dB	-6		
CP length		Normal		
Special subframe configuration		6		As specified in table 4.2-1 in TS 36.211[9].
				The same configuration in both cells
Uplink-downlink configuration		1		As specified in table 4.2-2 in TS 36.211[9].
				The same configuration in both cells
Hysteresis	dB	0		
Time To Trigger	S	0		
Filter coefficient		0		L3 filtering is not used
DRX		ON		DRX related parameters are defined in
				Table 8.2.2.4-2
Time offset between cells	μs	3		Synchronous cells
				3μs or 92*Ts
T1	S	5		
T2	s	5	30	

8.2.2.4.2 Test procedure

The test consists of one active cell and one neighbour cell. In the measurement control information it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time durations of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

In Test 1 UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, the UE is allocated with PUSCH resource at every DRX cycle.

In Test 2 the uplink time alignment is not maintained and UE needs to use RACH to obtain UL allocation for measurement reporting.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 8.2.2.5-1. Propagation conditions are set according to Annex B clauses B.1.1 and B.2.2. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 8.2.2.5-1.
- 6. UE shall transmit a MeasurementReport message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 842 ms for Test 1 and 26882 ms for Test 2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.
- 7. After the SS receives the MeasurementReport message in step 6 or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A, or
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.
- 11. Repeat step 1-10 for each sub-test in Table 8.2.2.4.1-1 as appropriate.

8.2.2.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.2.2.4.3-1: Common Exception messages for E-UTRAN TDD-TDD intra frequency event triggered reporting under fading propagation conditions in synchronous cells test requirement

Default Message Contents			
Common contents of system information			
blocks exceptions			
	Table H.3.1-2		
elements contents exceptions	Table H.3.1-7		

Table 8.2.2.4.3-2: RRCConnectionReconfiguration: Additional E-UTRAN TDD-TDD intra-frequency event triggered reporting under fading propagation conditions in synchronous cells when DRX is used test requirement

Derivation Path: TS 36.508 [7] clause 4.6.1, Table 4.6.1-8 RRCConnectionReconfiguration						
Information Element Value/remark Comment C						
RRCConnectionReconfiguration ::= SEQUENCE {						
rrc-TransactionIdentifier	RRC-					
	TransactionIdentifier-DL					
criticalExtensions CHOICE {						
c1 CHOICE{						
rrcConnectionReconfiguration-r8 SEQUENCE {						
measConfig						
	MeasConfig-DEFAULT		MEAS			
radioResourceConfigDedicated SEQUENCE {						
MAC-MainConfig-RBC SEQUENCE {						
ul-SCH-Config SEQUENCE {						
maxHARQ-Tx	n5					
periodicBSR-Timer	sf20					
retxBSR-Timer	sf1280					
ttiBundling	FALSE					
}						
drx-Config CHOICE {						
setup SEQUENCE {						
onDurationTimer	psf1					
drx-InactivityTimer	psf1					
drx-RetransmissionTimer	sf1					
longDRX-CycleStartOffset CHOICE {						
sf40	9	For Test 1				
sf1280	9	For Test 2				
}						
shortDRX	Not present					
}						
}						
timeAlignmentTimerDedicated	sf500					
Dhysical Carfie Dadicated CEOLIENCE (0.000					
PhysicalConfigDedicated SEQUENCE {	Cabadulia «Daguast					
schedulingRequestConfig	SchedulingRequest- Config-DEFAULT					
1	Coming-DEFAULT					
<u>}</u>						
)			-			
}	+					
}	<u> </u>					
1 }			I			

Table 8.2.2.4.3-3: ReportConfigEUTRA-A3: Additional E-UTRAN TDD-TDD intra-frequency event triggered reporting under fading propagation conditions in synchronous cells when DRX is used test requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-6 ReportConfigEUTRA-A3					
Information Element	Value/remark	Comment	Condition		
ReportConfigEUTRA-A3 ::= SEQUENCE {					
triggerType CHOICE {					
event SEQUENCE {					
eventId CHOICE {					
eventA3 SEQUENCE {					
a3-Offset	-12 (-6 dB)	-6 is actual value in dB (-12 * 0.5 dB)			
reportOnLeave	FALSE				
}					
}					
hysteresis	0 (0 dB)	0 is actual value in dB (0 * 0.5 dB)			
timeToTrigger	0 (0 ms)				
}					
}					

Table 8.2.2.4.3-4: SchedulingRequest-Config-DEFAULT: Additional E-UTRAN TDD-TDD intrafrequency event triggered reporting under fading propagation conditions in synchronous cells when DRX is used test requirement

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-20: SchedulingRequest-Config-DEFAULT						
Information Element	Value/remark	Comment	Condition			
SchedulingRequest-Config-DEFAULT ::= CHOICE {						
setup SEQUENCE {						
sr-PUCCH-ResourceIndex	41	Channel- bandwidth- dependent parameter				
sr-ConfigIndex	0					
dsr-TransMax	n4					
}						
}						

Table 8.2.2.4.3-5: MeasResults: Additional E-UTRAN TDD-TDD intra-frequency event triggered reporting under fading propagation conditions in synchronous cells when DRX is used test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1		
measResultServCell SEQUENCE {			
rsrpResult	INTEGER(097)	Set according to specific test	
rsrqResult	INTEGER(034)	Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
}			
}			

Table 8.2.2.4.3-6: MeasResultListEUTRA: Additional E-UTRAN TDD-TDD intra-frequency event triggered reporting under fading propagation conditions in synchronous cells when DRX is used test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultsListEUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
1 entry physCellId	PhysCellId	INTEGER (0503)	
		of Cell 2	
measResult SEQUENCE {			
rsrpResult		Set according to	
		specific test	
rsrqResult		Set according to	
		specific test	
}			
}			

8.2.2.5 Test requirement

Tables 8.2.2.5-1, 8.2.2.5-2 and 8.2.2.5-3 defines the primary level settings including test tolerances for E-UTRAN TDD-TDD intra-frequency event triggered reporting under fading propagation conditions in synchronous cells when DRX is used test.

Table 8.2.2.5-1: Cell specific test parameters for E-UTRAN TDD-TDD intra-frequency event triggered reporting under fading propagation conditions in synchronous cells when DRX is used

Parameter	Unit	Cell 1		(Cell 2
		T1	T2	T1	T2
E-UTRA RF Channel		1			1
Number					
BW _{channel}	MHz	1	0		10
OCNG Pattern defined					
in D.2.1 (OP.1 TDD)		OP.1	TDD	OP	.2 TDD
and in D.2.2 (OP.2)					
PBCH_RA	dB				
PBCH_RB	dB				
PSS_RA	dB				
SSS_RA	dB				
PCFICH_RB	dB				
PHICH_RA	dB				
PHICH_RB	dB		1		0
PDCCH_RA	dB		,		U
PDCCH_RB	dB				
PDSCH_RA	dB				
PDSCH_RB	dB				
OCNG_RA ^{Note 1}	dB				
OCNG_RB ^{Note 1}	dB				

$N_{oc}^{ m Note~2}$	dBm/15 kHz			-98	
RSRP Note 3	dBm/15 kHz	-91.40	-91.40	-Infinity	-91.40
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	dB	6.60	-0.86	-Infinity	-0.86
SCH_RP Note 3	dBm/15 kHz	-91.40	-91.40	-Infinity	-91.40
\hat{E}_s/N_{oc}	dB	6.60	6.60	-Infinity	6.60
Propagation Condition		ETU70			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{ac} to be fulfilled.

Note 3: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.2.2.5-2: DRX-Configuration for E-UTRAN TDD-TDD intra-frequency event triggered reporting in DRX under fading propagation conditions in synchronous cells

Field	Test1 Value	Test2 Value	Comment
onDurationTimer	psf1	psf1	As specified in section 6.3.2 in
drx-InactivityTimer	psf1	psf1	3GPP TS 36.331
drx-RetransmissionTimer	sf1	sf1	
longDRX-CycleStartOffset	sf40	sf1280	
shortDRX	disable	disable	

Table 8.2.2.5-3: *TimeAlignmentTimer* -Configuration for E-UTRAN TDD-TDD intra-frequency event triggered reporting in DRX under fading propagation conditions in synchronous cells

Field	Test1	Test2	Comment
rieid	Value	Value	
TimeAlignmentTimer	sf500	sf500	As specified in section 6.3.2 in 3GPP TS 36.331
sr-ConfigIndex	0	0	For further information see section 6.3.2 in 3GPP TS 36.331 and section 10.1 in 3GPP TS 36.213.

In Test 1 when DRX cycle length = 40 ms is used, the overall delay measured is defined as the time from the beginning of time period T2 to the moment when the UE send one Event A3 triggered measurement report on PUSCH.

In Test 2 when DRX cycle length = 1280 ms is used, the overall delay measured is defined as the time from the beginning of time period T2 to the moment when the UE starts to send preambles on the PRACH for scheduling request (SR) to obtain allocation to send the measurement report on PUSCH.

For both tests:

The overall delay measured may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

NOTE 1: The actual overall delays measured in the test may be up to one DRX cycle higher than the measurement reporting delays above because UE is allowed to delay the initiation of the measurement reporting procedure to the next until the Active Time.

NOTE 2: In order to calculate the rate of correct events the system simulator shall verify that it has received correct Event A3 measurement report.

The UE shall not send event triggered measurement reports, as long as the reporting criteria is not fulfilled.

The overall delay measured when DRX cycle length is 40 ms test requirement is expressed as:

Overall delay measured = measurement reporting delay + TTI insertion uncertainty + DRX cycle length

Measurement reporting delay = $T_{identify_intra}$

 $T_{identify\ intra} = 800$ ms. When DRX cycle length is 40 ms then the $T_{identify\ intra}$ is 0.8 s.

TTI insertion uncertainty = 2 ms

DRX cycle length = 40 ms

The overall delay measured when DRX cycle length is 40 ms shall be less than a total of 842 ms.

The overall delay measured when DRX cycle length is 1280 ms test requirement is expressed as:

Overall delay measured = measurement reporting delay + TTI insertion uncertainty + DRX cycle length

Measurement reporting delay = $T_{identify_intra}$

T_{identify intra} = 25600 ms. When DRX cycle length is 1280 ms then the T_{identify intra} is 20 x 1280 ms.

TTI insertion uncertainty = 2 ms

DRX cycle length = 1280 ms

The overall delay measured when DRX cycle length is 1280 ms shall be less than a total of 26882 ms.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

8.3 E-UTRAN FDD-FDD Inter-frequency Measurements

8.3.1 E-UTRAN FDD-FDD Inter-frequency event triggered reporting under fading propagation conditions in asynchronous cells

8.3.1.1 Test purpose

To verify the UE's ability to make a correct reporting of an event under fading propagation conditions in asynchronous cells within the E-UTRA FDD inter-frequency cell search requirements. This test will partly verify the FDD-FDD inter-frequency cell search requirements in section 8.1.2.3.

8.3.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

8.3.1.3 Minimum conformance requirements

When measurement gaps are scheduled the UE shall be able to identify a new FDD inter-frequency within $T_{Identify_Inter}$ according to the following expression:

$$T_{\text{Identify_Inter}} = T_{\text{Basic_Identify_Inter}} \cdot \frac{480}{T_{\text{Interl}}} \cdot N_{\text{freq}} \quad ms$$

Where:

 $T_{Basic_Identify_Inter} = 480$ ms. It is the time period used in the inter frequency equation where the maximum allowed time for the UE to identify a new FDD inter-frequency cell is defined.

 N_{freq} is defined in TS 36.133 [4] section 8.1.2.1.1 and T_{Inter1} is defined in TS36.133 [4] section 8.1.2.1.

A cell shall be considered detectable provided following conditions are fulfilled:

- RSRP $|_{dBm} \ge -125 \text{ dBm}$ and for Bands 1, 4, 6, 10, 11, 18, 19, 21 and RSRP $\hat{E}s/Iot \ge -4 \text{ dB}$,
- RSRP $|_{dBm} \ge -124 dBm$ for Bands 9 and RSRP $\hat{E}s/Iot \ge -4 dB$,

- RSRP $|_{dBm} \ge -123 \text{ dBm for Bands } 2, 5, 7, 17 \text{ and RSRP } \hat{E}_{s}/Iot \ge -4 \text{ dB},$
- RSRP $|_{dBm} \ge -122 \text{ dBm for Bands } 3, 8, 12, 13, 14, 20 \text{ and RSRP } \hat{E}s/Iot \ge -4 \text{ dB},$
- other RSRP related side conditions given in Section 9.1 are fulfilled,
- SCH_RP|_{dBm}≥ -125 dBm for Bands 1, 4, 6, 10, 11, 18, 19, 21 and SCH Ês/Iot ≥ -4 dB,
- SCH_RP $_{dBm} \ge -124$ dBm for Band 9 and SCH \hat{E} s/Iot ≥ -4 dB,
- SCH_RP $|_{dBm} \ge -123$ dBm for Bands 2, 5, 7, 17 and SCH Ês/Iot ≥ -4 dB,
- SCH_RP $|_{dBm}$ ≥ -122 dBm for Bands 3, 8, 12, 13, 14, 20 and SCH Ês /Iot ≥ -4 dB.

When measurement gaps are scheduled for FDD inter frequency measurements the UE physical layer shall be capable of reporting measurements to higher layers with measurement accuracy as specified in TS 36.133 sub-clause 9.1.3 with measurement period given by table 8.3.1.3-1.

Table 8.3.1.3-1: RSRP measurement period and measurement bandwidth

Configuration	Physical Layer Measurement period:	Measurement bandwidth [RB]
	T _{Measurement_Period_Inter_FDD} [ms]	
0	480 x N _{freq}	6
1 (Note)	240 x N _{freq}	50
Note: This confi	guration is optional.	

The UE shall be capable of performing RSRP and RSRQ measurements of at least 4 inter-frequency cells per FDD inter-frequency and the UE physical layer shall be capable of reporting RSRP and RSRQ measurements to higher layers with the measurement period defined in Table 8.3.1.3-1.

Reported measurements contained in event triggered measurement reports shall meet the requirements in TS 36.133 [4] clause 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than T _{identify_inter} defined in TS 36.133 [4] clause 8.1.2.3.1.1. When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{identify_intra}$ defined in TS 36.133 [4] section 8.1.2.2.1.1 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event, the event triggered measurement reporting delay shall be less than $T_{Measurement_Period\ Intra}$ provided the timing to that cell has not changed more than \pm 50 Ts and the L3 filter has not been used. When L3 filtering is used an additional delay can be expected

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.3.1 and A.8.3.1.

8.3.1.4 Test description

8.3.1.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and faders and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.15.
- 2. The general test parameter settings are set up according to Table 8.3.1.4.1-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 8.3.1.4.3.
- 5. There are two E-UTRA FDD carriers and two cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 8.3.1.4.1-1: General test parameters for E-UTRAN FDD-FDD inter frequency event triggered reporting in fading propagation conditions

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference Measurement Channel R.0 FDD	As specified in section A.1.1
PCFICH/PDCCH/PHICH		DL Reference Measurement	As specified in section A.2.1
parameters		Channel R.6 FDD	
E-UTRA RF Channel Number		1, 2	Two FDD carrier frequencies are used.
Channel Bandwidth (BW _{channel})	MHz	10	
Active cell		Cell 1	Cell 1 is on RF channel number 1
Neighbour cell		Cell 2	Cell 2 is on RF channel number 2
Gap Pattern Id		0	As specified in 3GPP TS 36.133 section 8.1.2.1.
A3-Offset	dB	-6	
Hysteresis	dB	0	
CP length		Normal	
TimeToTrigger	S	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF
Time offset between cells	ms	3	Asynchronous cells 3ms or 92160*Ts
T1	S	5	
T2	S	5	

8.3.1.4.2 Test procedure

The test consists of two successive time periods, with time durations of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 2. Gap pattern configuration is configured before T2 begins to enable inter-frequency monitoring.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 8.3.1.5-1. Propagation conditions are set according to Annex B clauses B.1.1 and B.2.2. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 8.3.1.5-1.
- 6. UE shall transmit a MeasurementReport message triggered by Event A3. If the measurement reporting delay from the beginning of time period T2 is less than 3842ms the number of successful tests is increased by one. If the UE fails to report the event within the measurement reporting delay requirement then the number of failure tests is increased by one.
- 7. After the SS receive the MeasurementReport message in step 6) or when T2 expires, the SS shall transmit a RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

- 8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A, or
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

8.3.1.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.3.1.4.3-1: Common Exception messages for E-UTRAN FDD-FDD intra frequency event triggered reporting under fading propagation conditions in synchronous cells test requirement

Default Message Contents				
Common contents of system information				
blocks exceptions				
	Table H.3.1-1			
elements contents exceptions	Table H.3.1-7			

Table 8.3.1.4.3-2: *MeasConfig-DEFAULT*: Additional E-UTRAN FDD-FDD inter frequency event triggered reporting under fading propagation conditions in asynchronous cells test requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-1 MeasConfig-DEFAULT:			
Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModList SEQUENCE (SIZE	2 entry		
(1maxObjectId)) OF SEQUENCE {			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f3		
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA- GENERIC(f3)	serving frequency	
}			
}			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f2		
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA- GENERIC(f2)	inter frequency	
}			
}			
}			
reportConfigToRemoveList	Not present		
reportConfigToAddModList SEQUENCE (SIZE (1maxReportConfigId))OF SEQUENCE {	1 entry		
reportConfigId	idReportConfig-A3		
reportConfig	ReportConfigEUTRA-A3		
}			
measIdToRemoveList	Not present		
measIdToAddModList SEQUENCE (SIZE	1 entry		
(1maxMeasId)) of SEQUENCE {			
measld	1		
measObjectId	IdMeasObject-f2		
reportConfigId	idReportConfig-A3		
}			
quantityConfig	QuantityConfig- DEFAULT		
measGapConfig	MeasGapConfig-GP1		
s-Measure	Not present		
preRegistrationInfoHRPD	Not present		
speedStatePars	Not present		
}	·		

Table 8.3.1.4.3-3: ReportConfigEUTRA-A3: Additional E-UTRAN FDD-FDD inter frequency event triggered reporting under fading propagation conditions in asynchronous cells test requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-6 ReportConfigEUTRA-A3				
Information Element	Value/remark	Comment	Condition	
ReportConfigEUTRA ::= SEQUENCE {				
triggerType CHOICE {				
event SEQUENCE {				
eventId CHOICE {				
eventA3 SEQUENCE {				
a3-Offset	-12 (-6 dB)	-6 is actual value in dB (-12 * 0.5 dB)		
reportOnLeave	FALSE			
}				
}				
Hysteresis	0 (0 dB)	0 is actual value in dB (0 * 0.5 dB)		
timeToTrigger	0 (0 ms)			
}				
}				

Table 8.3.1.4.3-4: *MeasResults*: Additional E-UTRAN FDD-FDD inter frequency event triggered reporting under fading propagation conditions in asynchronous cells test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld			
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
}			
}			

Table 8.3.1.4.3-5: *MeasResultListEUTRA*: Additional E-UTRAN FDD-FDD inter frequency event triggered reporting under fading propagation conditions in asynchronous cells test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListEUTRA::= SEQUENCE (SIZE (1maxCellReport)) OF SEQUENCE {			
physCellId	PhysicalCellIdentity		
measResult SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
}			

8.3.1.5 Test requirement

Tables 8.3.1.4.1-1 and 8.3.1.5-1 define the primary level settings including test tolerances for event triggered reporting under fading propagation conditions in asynchronous inter frequency cells test.

Table 8.3.1.5-1: Cell specific test requirement parameters for E-UTRAN FDD-FDD inter frequency event triggered reporting under fading propagation conditions in asynchronous cells

Parameter	Unit	Cell 1 T1 T2		C	cell 2
				T1	T2
E-UTRA RF Channel		1			2
Number					
BW _{channel}	MHz	1	0		10
OCNG Patterns defined					
in D.1.1 (OP.1 FDD)		OP 1	FDD	OP	.2 FDD
and in D.1.2 (OP.2		01.1	100		.2100
FDD)					
PBCH_RA	dB				
PBCH_RB	dB				
PSS_RA	dB				
SSS_RA	dB				
PCFICH_RB	dB				
PHICH_RA	dB				
PHICH_RB	dB		0	0	
PDCCH_RA	dB		J		U
PDCCH_RB	dB				
PDSCH_RA	dB				
PDSCH_RB	dB				
OCNG_RA ^{Note 1}	dB				
OCNG_RB ^{Note 1}	dB				
$N_{oc}^{ m Note~3}$	dBm/15 kHz			-98	
RSRP Note 4	dBm/15 kHz	-94	-94	-Infinity	-91
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	dB	4	4	-Infinity	7
SCH_RP	dBm/15 kHz	-94	-94	-Infinity	-91
\hat{E}_s/N_{oc}	dB	4	4	-Infinity	7
Propagation Condition			E	TU70	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 3: Interference from other cells and noise sources not specified in the test is assumed to be constant

over subcarriers and time and shall be modelled as AWGN of appropriate power for $N_{oc}\,$ to be fulfilled

Note 4: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 3842 ms from the beginning of time period T2.

The overall delays measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event A3 triggered measurement report to Cell 2.

The overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = 3840 ms

TTI insertion uncertainty = $TTI_{DCCH} = 1$ ms; $2xTTI_{DCCH} = 2$ ms

The overall delays measured shall be less than a total of 3842 ms in this test case (note: this gives a total of 3840 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

8.3.2 E-UTRAN FDD-FDD Inter-frequency event triggered reporting when DRX is used under fading propagation conditions in asynchronous cells

8.3.2.1 Test purpose

To verify the UE's ability to make a correct reporting of an event in DRX under fading propagation conditions in asynchronous cells within the E-UTRA FDD-FDD inter frequency cell search requirements.

8.3.2.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

8.3.2.3 Minimum conformance requirements

When measurement gaps are scheduled the UE shall be able to identify a new FDD inter-frequency within $T_{Identify_Inter}$ as shown in table 8.3.2.3-1:

Table 8.3.2.3-1: Requirement to identify a newly detectable FDD inter-frequency cell

DRX cycle	T _{identify_inter} (s)	(DRX cycles)		
length (s)	Gap period = 40 ms	Gap period = 80 ms		
≤0.16	Non DRX Requirements in	Non DRX Requirements in		
	TS 36.133 [4] clause	TS 36.133 [4] clause		
	8.1.2.3.1.1 are applicable	8.1.2.3.1.1 are applicable		
0.256	5.12*N _{freq} (20*N _{freq})	7.68*N _{freq} (30*N _{freq})		
0.32	6.4*N _{freq} (20*N _{freq})	7.68*N _{freq} (24*N _{freq})		
0.32 < DRX-	Note (20*N _{freq})	Note (20*N _{freq})		
cycle ≤ 2.56	-			
Note: Time depends upon the DRX cycle in use				

The non DRX requirements in TS 36.133 [4] clause 8.1.2.3.1.1 states that when measurement gaps are scheduled the UE shall be able to identify a new FDD inter-frequency within $T_{Identify\ Inter}$ according to the following expression:

$$T_{\text{Identify_Inter}} = T_{\text{Basic_Identify_Inter}} \cdot \frac{480}{T_{\text{Inter}}} \cdot N_{\text{freq}} \quad ms$$

Where:

 $T_{Basic_Identify_Inter} = 480$ ms. It is the time period used in the inter frequency equation where the maximum allowed time for the UE to identify a new FDD inter-frequency cell is defined.

N_{freq} is defined in TS 36.133 [4] section 8.1.2.1.1 and T_{Inter1} is defined in TS36.133 [4] section 8.1.2.1.

A cell shall be considered detectable provided following conditions are fulfilled:

- RSRP|dBm \geq -125 dBm and for Bands 1, 4, 6, 10, 11, 18, 19, 21 and RSRP £s/Iot \geq -4 dB,
- RSRP|dBm \geq -124 dBm for Bands 9 and RSRP \hat{E} s/Iot \geq -4 dB,
- RSRP|dBm \geq -123 dBm for Bands 2, 5, 7, 17 and RSRP \hat{E} s/Iot \geq -4 dB,
- RSRP|dBm \geq -122 dBm for Bands 3, 8, 12, 13, 14, 20 and RSRP Ês/Iot \geq -4 dB,
- other RSRP related side conditions given in Section 9.1 are fulfilled,

- SCH_RP|_{dBm}≥ -125 dBm for Bands 1, 4, 6, 10 11, 18, 19, 21 and SCH \hat{E} s/Iot ≥ -4 dB,
- SCH RP $_{dBm} \ge -124$ dBm for Band 9 and SCH \hat{E} s/Iot ≥ -4 dB,
- SCH_RP $|_{dBm} \ge -123$ dBm for Bands 2, 5, 7, 17 and SCH $\hat{E}s/Iot \ge -4$ dB,
- SCH_RP $|_{dBm}$ ≥ -122 dBm for Bands 3, 8, 12, 13, 14, 20 and SCH Ês/Iot ≥ -4 dB.

The UE shall be capable of performing RSRP and RSRQ measurements of at least 4 inter-frequency cells per FDD inter-frequency and the UE physical layer shall be capable of reporting RSRP and RSRQ measurements to higher layers with the measurement period defined in Table 8.3.2.3-2.

Table 8.3.2.3-2: Requirement to measure FDD inter-frequency cells

DRX cycle length (s)	T _{measure_inter} (s) (DRX cycles)		
≤0.08	Non DRX		
	Requirements in TS		
	36.133 [4] clause		
	8.1.2.3.1.1 are		
	applicable		
0.08 < DRX-	Note (5*N _{freq})		
cycle ≤ 2.56	·		
Note: Time	Note: Time depends upon the		
DRX cycle in use			

The measurement accuracy for all measured cells shall be as specified in TS 36.133 [4] clause 9.1.

Reported measurements contained in event triggered measurement reports shall meet the requirements in TS 36.133 [4] clause 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI DCCH. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify\ inter}$ defined in TS 36.133 [4] clause 8.1.2.2.1.1. When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{identify_intra}$ defined in TS 36.133 [4] section 8.1.2.2.1.1 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event, the event triggered measurement reporting delay shall be less than $T_{Measurement_Period\ Intra}$ provided the timing to that cell has not changed more than \pm 50 Ts and the L3 filter has not been used. When L3 filtering is used an additional delay can be expected

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.3.1 and A.8.3.2.

8.3.2.4 Test description

8.3.2.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

1. Connect the SS (node B emulator) and faders and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.15.

- 2. The general test parameter settings are set up according to Table 8.3.2.4.1-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 8.3.2.4.3.
- 5. There are two E-UTRA FDD carrier and two cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 8.3.2.4.1-1: General Test Parameters for E-UTRAN FDD-FDD inter-frequency event triggered reporting when DRX is used under fading propagation conditions in asynchronous cells

Parameter	Unit	Test 1	Test 2	Comment
		Value		
PDSCH parameters		DL Reference	Measurement	As specified in section A.1.1 Note that UE
		Channel	R.0 FDD	may only be allocated at On Duration
PCFICH/PDCCH/PHICH		DL Reference Measurement		As specified in section A.2.1.
parameters		Channel	R.6 FDD	
E-UTRA RF Channel		1,	2	Two FDD carrier frequencies are used.
Number				
Channel Bandwidth	MHz	1	0	
(BW _{channel})				
Active cell		Ce	II 1	Cell 1 is on RF channel number 1
Neighbour cell		Ce	II 2	Cell 2 is on RF channel number 2
Gap Pattern Id		()	As specified in 3GPP TS 36.133 section
				8.1.2.1.
A3-Offset	dB	-	6	
Hysteresis	dB	()	
CP length		Nor	mal	
TimeToTrigger	s	()	
Filter coefficient		()	L3 filtering is not used
PRACH configuration		4	1	As specified in table 5.7.1-2 in TS 36.211
Access Barring Information	-	Not	Sent	No additional delays in random access
				procedure.
DRX		0	N	DRX related parameters are defined in
				Table 8.3.2.5-2
Time offset between cells		3 ms		Asynchronous cells
				3ms or 92160*Ts
T1	S	Ę	5	
T2	S	5	30	

8.3.2.4.2 Test procedure

The test consists of one active cell and one neighbour cell. In the measurement control information it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time durations of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

In Test 1 when DRX = 40 ms is used, UE needs to be provided at least once every 500 ms with new Timing Advance Command MAC control element to restart the Timer Alignment Timer to keep the UE uplink time alignment. Furthermore, the UE is allocated with PUSCH resource at every DRX cycle. In Test 2 when DRX = 1280 ms is used, the uplink time alignment is not maintained and the UE needs to use RACH to obtain uplink allocation for measurement reporting.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 8.3.2.5-1. Propagation conditions are set according to Annex B clauses B.1.1 and B.2.2. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 8.3.2.5-1.

- 6. UE shall transmit a MeasurementReport message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 3882 ms for Test 1 or less than 26882 ms for Test 2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.
- 7. After the SS receive the MeasurementReport message in step 6) or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop. Repeat step 1-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A, or
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 for each sub-test in Table 8.3.2.4.1-1 as appropriate.

8.3.2.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.3.2.4.3-1: Common Exception messages for E-UTRAN FDD-FDD inter-frequency event triggered reporting when DRX is used in fading propagation conditions test 1 and 2 requirements

Default Message Contents			
Common contents of system information			
blocks exceptions			
Default RRC messages and information	Table H.3.1-7		
elements contents exceptions	Table H.3.7-1		
·	Table H.3.7-2		
	Table H.3.7-3		

Table 8.3.2.4.3-2: RRCConnectionReconfiguration: Additional E-UTRAN FDD-FDD inter-frequency event triggered reporting when DRX is used in fading propagation conditions test 1 and 2 requirement

Derivation Path: TS 36.508 [7] clause 4.6.1, Table 4.6.1-8 RRCConnectionReconfiguration				
Information Element	Value/remark	Comment	Condition	
RRCConnectionReconfiguration ::= SEQUENCE {				
rrc-TransactionIdentifier	RRC-			
	TransactionIdentifier-DL			
criticalExtensions CHOICE {				
c1 CHOICE{				
rrcConnectionReconfiguration-r8 SEQUENCE {				
measConfig	MeasConfig -DEFAULT			
radioResourceConfigDedicated	RadioResourceConfigDed icated-HO			
}				
}				
}				
}				

Table 8.3.2.4.3-2: *MeasConfig-DEFAULT*: Additional E-UTRAN FDD-FDD inter-frequency event triggered reporting when DRX is used in fading propagation conditions test 1 and 2 requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-1 MeasConfig-DEFAULT:			
Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModList SEQUENCE (SIZE	2 entry		
(1maxObjectId)) OF SEQUENCE {			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject- f3		
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA- GENERIC(f3)	serving frequency	
}			
}			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f2		
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA- GENERIC(f2)	inter frequency	
}			
}			
}			
reportConfigToRemoveList	Not present		
reportConfigToAddModList SEQUENCE (SIZE (1maxReportConfigId))OF SEQUENCE {	1 entry		
reportConfigld	idReportConfig-A3		
reportConfig	ReportConfigEUTRA-A3		
}			
measIdToRemoveList	Not present		
measIdToAddModList SEQUENCE (SIZE	1 entry		
(1maxMeasId)) of SEQUENCE {			
measld	1		
measObjectId	IdMeasObject-f2		
reportConfigId	idReportConfig-A3		
}			
quantityConfig	QuantityConfig- DEFAULT		
measGapConfig	MeasGapConfig-GP1		
s-Measure	Not present		
preRegistrationInfoHRPD	Not present		
speedStatePars	Not present		
}	·		

Table 8.3.2.4.3-3: ReportConfigEUTRA-A3: Additional E-UTRAN FDD-FDD inter-frequency event triggered reporting when DRX is used in fading propagation conditions test 1 and 2 requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table	4.6.6-6 ReportConfigEUTRA	-A3	
Information Element	Value/remark	Comment	Conditi on
ReportConfigEUTRA-A3 ::= SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventide CHOICE {			
eventA3 SEQUENCE {			
a3-Offset	-12 (-6 dB)	-6 is actual value in dB (-12 * 0.5 dB)	
reportOnLeave	FALSE		
}			
}			
Hysteresis	0 (0 dB)	0 is actual value in dB (0 * 0.5 dB)	
timeToTrigger	0 (0 ms)		
}			
}			

Table 8.3.2.4.3-4: SchedulingRequest-Config-DEFAULT: Additional E-UTRAN FDD-FDD interfrequency event triggered reporting when DRX is used in fading propagation conditions test 1 and 2 requirements

Information Element	Value/remark	Comment	Condition
SchedulingRequest-Config-DEFAULT ::= CHOICE {			
setup SEQUENCE {			
sr-PUCCH-ResourceIndex	41	10 MHz channel bandwidth parameter	
sr-ConfigIndex	0		
dsr-TransMax	n4		
}			
}			

Table 8.3.2.4.3-5: *MeasResults*: Additional E-UTRAN FDD-FDD inter-frequency event triggered reporting when DRX is used in fading propagation conditions test 1 and 2 requirements

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1	Identifies the measurement id	
		for the reporting being performed	
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
}			
}			

Table 8.3.2.4.3-6: MeasResultListEUTRA: Additional E-UTRAN FDD-FDD inter-frequency event triggered reporting when DRX is used in fading propagation conditions test 1 and 2 requirements

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListEUTRA ::= SEQUENCE (SIZE (1maxCellReport)) OF MeasResultEUTRA {			
physCellId	PhysCellId		
measResult SEQUENCE {			
rsrpResult		Set according to specific test INTEGER(097)	
rsrqResult		Set according to specific test INTEGER(034)	
}			
}			

8.3.2.5 Test requirement

Tables 8.3.2.4.1-1, 8.3.2.5-1, 8.3.2.5-2 and 8.3.2.5-3 define the primary level settings including test tolerances for E-UTRAN FDD-FDD inter-frequency event triggered reporting when DRX is used under fading propagation conditions in asynchronous cells test.

Table 8.3.2.5-1: Cell Specific Test Parameters for E-UTRAN FDD-FDD inter-frequency event triggered reporting when DRX is used in fading propagation conditions

Parameter	Unit	Cell 1			Cell 2
		T1	T2	T1	T2
E-UTRA RF Channel		1			2
Number					
BW _{channel}	MHz	10			10
OCNG Patterns		OP.1	FDD	OF	2.2 FDD
defined in D.1.1 (OP.1					
FDD) and in D.1.2					
(OP.2 FDD)					
PBCH_RA	dB				
PBCH_RB	dB				
PSS_RA	dB				
SSS_RA	dB				
PCFICH_RB	dB				
PHICH_RA	dB				
PHICH_RB	dB	0			0
PDCCH_RA	dB	0			U
PDCCH_RB	dB				
PDSCH_RA	dB				
PDSCH_RB	dB				
OCNG_RA ^{Note 1}	dB				
OCNG_RB ^{Note 1}	dB				

$N_{oc}^{ m Note~2}$	dBm/15 kHz	-98			
RSRP Note 3	dBm/15 kHz	-94	-94	-Infinity	-91
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	dB	4	4	-Infinity	7
SCH_RP Note 3	dBm/15 kHz	-94	-94	-Infinity	-91
\hat{E}_s/N_{oc}	dB	4	4	-Infinity	7
Propagation Condition		ETU70			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.3.2.5-2: DRX-Configuration to be used in E-UTRAN FDD-FDD inter-frequency event triggered reporting when DRX is used in fading propagation conditions

Field	Test1 Value	Test2 Value	Comment
onDurationTimer	psf1	psf1	
drx-InactivityTimer	psf1	psf1	
drx-RetransmissionTimer	sf1	sf1	
longDRX-CycleStartOffset	sf40	sf1280	
shortDRX	disable	disable	
Note: For further information see se	ction 6.3.2 in 3GP	P TS 36.331	[5].

Table 8.3.2.5-3: *TimeAlignmentTimer* and *sr-ConfigIndex*-Configuration to be used in E-UTRAN FDD-FDD inter-frequency event triggered reporting when DRX is used in fading propagation conditions

Field	Test1	Test2	Comment
rieid	Value	Value	
TimeAlignmentTimer	sf500	sf500	For further information see section 6.3.2 in 3GPP TS 36.331 [5].
sr-ConfigIndex	0	0	For further information see section 6.3.2 in 3GPP TS 36.331 and section10.1 in 3GPP TS 36.213 [8].

In Test 1 when DRX cycle length = 40 ms is used, the overall delays measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event A3 triggered measurement report to Cell 2 on PUSCH.

In Test 2 when DRX cycle length = 1280 ms is used, the overall delays measured is defined as the time from the beginning of time period T2, to the moment the UE starts to send preambles on the PRACH for Scheduling Request (SR) to obtain allocation to send the measurement report to Cell 2 on PUSCH.

For both tests:

The overall delay measured may be up to 2xTTI_{DCCH} higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

NOTE 1: The actual overall delays measured in the test may be up to one DRX cycle higher than the measurement reporting delays above because UE is allowed to delay the initiation of the measurement reporting procedure to the next until the Active Time.

NOTE 2: In order to calculate the rate of correct events the system simulator shall verify that it has received correct Event A3 measurement report.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The overall delay measured when DRX cycle length is 40 ms test requirement is expressed as:

Overall delay measured = measurement reporting delay + TTI insertion uncertainty+ DRX cycle length

Measurement reporting delay = $T_{Identify\ Inter}$

$$T_{\text{Identify_Inter}} = T_{\text{Basic_Identify_Inter}} \cdot \frac{480}{T_{\text{Interl}}} \cdot N_{\text{freq}} \quad ms$$

Where:

 $T_{Basic_Identify_Inter} = 480$ ms. It is the time period used in the inter frequency equation where the maximum allowed time for the UE to identify a new FDD inter-frequency cell is defined.

 $T_{Inter1} = 60$ ms. It is defined in table 8.1.2.1-1 of TS36.133 [4] clause 8.1.2.1.

 $N_{freq} = 1$. It is defined in TS 36.133 [4] clause 8.1.2.1.1.

TTI insertion uncertainty = 2 ms

DRX cycle length = 40 ms

The overall delays measured when DRX cycle length is 40 ms shall be less than a total of 3882 ms.

The overall delay measured when DRX cycle length is 1280 ms test requirement is expressed as:

Overall delay measured = measurement reporting delay + TTI insertion uncertainty + DRX cycle length

Measurement reporting delay = $T_{identify_inter}$

 $T_{identify_inter}$ = 25600 ms. When DRX cycle length is 1280 ms then the $T_{identify_inter}$ is 20 x 1280 ms, as defined in Table 8.3.2.3-1.

TTI insertion uncertainty = 2 ms

DRX cycle length = 1280 ms

The overall delays measured when DRX cycle length is 1280 ms shall be less than a total of 26882 ms.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

8.3.3 E-UTRAN FDD-FDD Inter frequency event triggered reporting under AWGN propagation conditions in asynchronous cells with DRX when L3 filtering is used

8.3.3.1 Test purpose

To verify the UE's ability to make a correct reporting of an event in DRX when L3 filtering is used in AWGN propagation conditions in asynchronous cells within the E-UTRA FDD-FDD inter frequency cell search in DRX requirements and the UE behaviour with the filterCoefficent.

8.3.3.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

8.3.3.3 Minimum conformance requirements

When DRX is in use the UE shall be able to identify a new detectable FDD inter frequency cell within $T_{identify\ inter}$ as defined in table 8.1.2.3.1.2-1 of TS 36.133 [4] clause 8.1.2.3.1.2.

A cell shall be considered detectable when

- RSRP $|_{dBm}$ > -125 dBm and for Bands 1, 4, 6, 10, 11, 18, 19, 21 and RSRP $\hat{E}s/Iot \ge -4 dB$,

- RSRP $|_{dBm}$ > -124 dBm for Bands 9 and RSRP Ês/Iot \geq -4 dB,
- RSRP $|_{dBm}$ > -123 dBm for Bands 2, 5, 7, 17 and RSRP \hat{E} s/Iot \geq -4 dB,
- RSRP $|_{dBm}$ > -122 dBm for Bands 3, 8, 12, 13, 14, 20 and RSRP $\hat{E}s/Iot \ge -4$ dB,
- other RSRP related side condition given in TS 36.133 [4] clause 9.1 are fulfilled,
- SCH_RP $|_{dBm} \ge -125 \text{ dBm}$ for Bands 1, 4, 6, 10, 11, 18, 19, 21 and SCH Ês/Iot $\ge -4 \text{ dB}$,
- SCH_RP |_{dBm}≥ -124 dBm for Band 9 and SCH Ês/Iot > 4 dB,
- SCH_RP $|_{dBm} \ge -123 \text{ dBm}$ for Bands 2, 5, 7, 11, 17 and SCH Ês/Iot > 4 dB,
- SCH_RP $|_{dBm} \ge -122 \text{ dBm for Bands } 3, 8, 12, 13, 14, 20 \text{ and SCH } \hat{E}s/Iot > -4 \text{ dB}.$

The UE shall be capable of performing RSRP and RSRQ measurements of at least 4 inter-frequency cells per FDD inter-frequency and the UE physical layer shall be capable of reporting RSRP and RSRQ measurements to higher layers with the measurement period defined in table 8.3.3.3-1.

Table 8.3.3.3-1: Requirement to measure FDD inter frequency cells

DRX cycle length (s)	T _{measure_inter} (s) (DRX cycles)			
≤0.08	Non DRX			
	Requirements in			
	section 8.1.2.3.1.1			
	in 3GPP TS 36.133			
	[4] are applicable			
0.08 <drx-< td=""><td>Note (5*N_{freq})</td></drx-<>	Note (5*N _{freq})			
cycle≤2.56	·			
Note: Time depends upon the DRX				
cycle	e in use			

The measurement accuracy for all measured cells shall be as specified in TS 36.133 [4] clause 9.1.

Reported measurements contained in event triggered measurement reports shall meet the requirements in TS 36.133 [4] clause 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than T $_{identify_inter}$ defined in TS 36.133 [4] clause 8.1.2.3.1.1. When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{identify_inter}$ defined in TS 36.133 [4] clause 8.1.2.3.1.1 and then enters or leaves the reporting range, the event triggered measurement reporting delay shall be less than $T_{Measurement_Period\ Inter}$ defined in TS 36.133 [4] clause 8.1.2.3.1.1 provided the timing to that cell has not changed more than \pm 50 Ts while measurement gap has not been available and the L3 filter has not been used. When L3 filtering is used an additional delay can be expected.

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.3.1 and A.8.3.3.

8.3.3.4 Test description

8.3.3.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14.
- 2. The general test parameter settings are set up according to Table 8.3.3.4.1-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 8.3.3.4.3.
- 5. There is one E-UTRA FDD carrier and two cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 8.3.3.4.1-1: General Test Parameters for E-UTRAN FDD-FDD inter-frequency event triggered reporting under AWGN propagation conditions with DRX when L3 filtering is used

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference Measurement Channel R.0 FDD	As specified in section A.1.1
PCFICH/PDCCH/PHICH parameters		DL Reference Measurement Channel R.6 FDD	As specified in section A.2.1
Active cell		Cell 1	
Neighbour cell		Cell 2	Cell to be identified.
E-UTRA RF Channel Number		1, 2	Two FDD carrier frequencies are used.
Channel Bandwidth (BW _{channel})	MHz	10	
Gap Pattern Id		1	As specified in 3GPP TS 36.133 [4] section 8.1.2.1
Neighbour A3-Offset Ofn	dB	-14	
CP length		Normal	
Hysteresis	dB	0	
Time To Trigger	dB	0	
Filter coefficient		9	L3 filtering is used
DRX		ON	DRX related parameters are defined in Table 8.3.3.5-2
Time offset between cells		3 ms	Asynchronous cells
T1	S	30	
T2	S	7	

8.3.3.4.2 Test procedure

The test consists of one active cell and one neighbour cell. In the measurement control information it is indicated to the UE that event-triggered reporting with Event A3 and the filter coefficient is used. The test consists of two successive time periods, with time durations of T1 and T2 respectively.

In the Test when DRX = 1280 ms is used, a non-zero L3 filtering is configured. The uplink time alignment is not maintained and UE needs to use RACH to obtain UL allocation for measurement reporting.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 8.3.3.5-1. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 8.3.3.5-1 and 8.3.3.5-2.

- 6. UE shall transmit a MeasurementReport message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 7682 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.
- 7. After the SS receive the MeasurementReport message in step 6) or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A, or
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.
- 11. Repeat step 1-10 for each sub-test in Table 8.3.3.4.1-1 as appropriate.

8.3.3.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.3.3.4.3-1: Common Exception messages for E-UTRAN FDD-FDD inter-frequency event triggered reporting under AWGN propagation conditions with DRX when L3 filtering is used in test requirement

Default Message Contents				
Common contents of system information				
blocks exceptions				
Default RRC messages and information	Table H.3.1-3			
elements contents exceptions	Table H.3.7-2			
·	Table H.3.7-3			

Table 8.3.3.4.3-2: RRCConnectionReconfiguration: Additional E-UTRAN FDD-FDD inter-frequency event triggered reporting under AWGN propagation conditions with DRX when L3 filtering is used in test requirement

Derivation Path: TS 36.508 [7] clause 4.6.1, Table 4.6.1-8 RRCConnectionReconfiguration						
Information Element	Value/remark	Comment	Condition			
RRCConnectionReconfiguration ::= SEQUENCE {						
rrc-TransactionIdentifier	RRC-					
	TransactionIdentifier-DL					
criticalExtensions CHOICE {						
c1 CHOICE{						
rrcConnectionReconfiguration-r8 SEQUENCE {						
measConfig	MeasConfig -DEFAULT					
radioResourceConfigDedicated	RadioResourceConfigDed icated-HO					
}						
}						
}						
}						

Table 8.3.3.4.3-3: ReportConfigEUTRA-A3: Additional E-UTRAN FDD-FDD inter-frequency event triggered reporting under AWGN propagation conditions with DRX when L3 filtering is used in test requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-6 ReportConfigEUTRA-A3						
Information Element	Value/remark	Comment	Condition			
ReportConfigEUTRA-A3 ::= SEQUENCE {						
triggerType CHOICE {						
event SEQUENCE {						
eventid CHOICE {						
eventA3 SEQUENCE {						
a3-Offset	0 (0 dB)	The actual value is IE value * 0.5 dB IE Value INTEGER (-30 30)				
reportOnLeave	FALSE					
}						
}						
hysteresis	0 (0 dB)	The actual value is IE value * 0.5 dB				
timeToTrigger	0 (0 ms)					
}						
}						

Table 8.3.3.4.3-4: SchedulingRequest-Config-DEFAULT: Additional E-UTRAN FDD-FDD interfrequency event triggered reporting under AWGN propagation conditions with DRX when L3 filtering is used test requirement

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-20 SchedulingRequest-Config-DEFAULT						
Information Element	Value/remark	Comment	Condition			
SchedulingRequest-Config-DEFAULT ::= CHOICE {						
setup SEQUENCE {						
sr-PUCCH-ResourceIndex	41	10 MHz channel bandwidth parameter				
sr-ConfigIndex	0					
dsr-TransMax	n4					
}						
}						

Table 8.3.3.4.3-5: *MeaResults*: Additional E-UTRAN FDD-FDD inter-frequency event triggered reporting under AWGN propagation conditions with DRX when L3 filtering is used test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1	Identifies the	
		measurement id	
		for the reporting	
		being performed	
measResultServCell SEQUENCE {			
rsrpResult		Set according to	
		specific test	
rsrqResult		Set according to	
		specific test	
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
}			
}			

Table 8.3.3.4.3-6: MeasResultListEUTRA: Additional E-UTRAN FDD-FDD inter-frequency event triggered reporting under AWGN propagation conditions with DRX when L3 filtering is used test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListEUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF MeasResultEUTRA {			
physCellId	PhysCellId		
measResult SEQUENCE {			
rsrpResult		Set according to specific test INTEGER(097)	
rsrqResult		Set according to specific test INTEGER(034)	
}			
}			

Table 8.3.3.4.3-7: FilterCoefficient: Additional E-UTRAN FDD-FDD inter-frequency event triggered reporting under AWGN propagation conditions with DRX when L3 filtering is used test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
filterCoefficient	fc9		

Table 8.3.3.4.3-8: MeasObjectEUTRA-GENERIC(Freq): Additional E-UTRAN FDD-FDD inter-frequency event triggered reporting under AWGN propagation conditions with DRX when L3 filtering is used test requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.	6-2 MeasObjectEUTRA-GEN	NERIC(Freq)			
Information Element	Value/remark Comment Con				
MeasObjectEUTRA-GENERIC(Freq) ::= SEQUENCE					
{					
carrierFreq	Downlink EARFCN for				
	Freq				
allowedmeasBandwidth	The number of the				
	resource blocks for Freq				
presenceAntennaPort1	FALSE				
neighCellConfig	'10'B (The MBSFN				
	subframe allocations of				
	all neighbour cells are				
	identical to or subsets of				
	that in the serving cells)				
offsetFreq	-14 (dB-14)	-14 dB is actual			
		value in dB (Value			
		dB-14			
		corresponds to -			
		14 dB)			
cellsToRemoveList	Not present				
cellsToAddModList	Not present				
blackCellsToRemoveList	Not present				
blackCellsToAddModList	Not present				
cellForWhichToReportCGI	Not present				
}					

8.3.3.5 Test requirement

Tables 8.3.3.4.1-1, 8.3.3.5-1, 8.3.3.5-2 and 8.3.3.5-3 define the primary level settings including test tolerances for E-UTRAN FDD-FDD inter-frequency event triggered reporting under AWGN propagation conditions in asynchronous cells with DRX when L3 filtering is used test.

Table 8.3.3.5-1: Cell Specific Test Parameters for E-UTRAN FDD-FDD inter-frequency event triggered reporting under AWGN propagation conditions with DRX when L3 filtering is used

Parameter	Unit	Ce	Cell 1		Cell 2
		T1	T2	T1	T2
E-UTRA RF Channel		1 2		2	
Number					
BW _{channel}	MHz		10		10
OCNG Patterns					
defined in D.1.1 (OP.1		OP 1	FDD	OP	.2 FDD
FDD) and in D.1.2		0			.2 . 55
(OP.2 FDD)					
PBCH_RA	dB				
PBCH_RB	dB				
PSS_RA	dB				
SSS_RA	dB				
PCFICH_RB	dB				
PHICH_RA	dB			0	
PHICH_RB	dB		0		
PDCCH_RA	dB				-
PDCCH_RB	dB				
PDSCH_RA	dB				
PDSCH_RB	dB				
OCNG_RA ^{Note 1}	dB				
OCNG_RB ^{Note 1}	dB				
$\mathbf{\hat{E}}_{\mathrm{s}}/\mathbf{I}_{\mathrm{ot}}$	dB	4.00	1.80	4.00	24.00
$N_{oc}^{$	dBm/15 KHz	-96.90	-96.90	-98.00	-98.00
\hat{E}_s/N_{oc}	dB	4.00	1.80	4.00	24.00
RSRP Note 3	dBm/15 KHz	-92.90	-95.10	-94.00	-74.00
SCH_RP Note 3	dBm/15 KHz	-92.90	-95.10	-94.00	-74.00
Propagation Condition			A	WGN	•

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{ac} to be fulfilled.

Note 3: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.3.3.5-2: DRX-Configuration to be used in E-UTRAN FDD-FDD inter-frequency event triggered reporting under AWGN propagation conditions with DRX when L3 filtering is used

Field	Value	Comment
onDurationTimer	psf1	As specified in section 6.3.2 in
drx-InactivityTimer	psf1	3GPP TS 36.331 [5].
drx-RetransmissionTimer	sf1	
longDRX-CycleStartOffset	sf1280	
shortDRX	disable	

Table 8.3.3.5-3: *TimeAlignmentTimer* and *sr-ConfigIndex*-Configuration to be used in E-UTRAN FDD-FDD inter-frequency event triggered reporting under AWGN propagation conditions with DRX when L3 filtering is used

Field	Value	Comment
TimeAlignmentTimer	sf500	As specified in section 6.3.2 in 3GPP TS 36.331 [5].
sr-ConfigIndex	0	For further information see section 6.3.2 in 3GPP TS 36.331 [5] and section 10.1 in 3GPP TS 36.213 [8].

The overall delay measured is defined as the time from the beginning of time period T2, to the moment the UE starts to send preambles on the PRACH for Scheduling Request (SR) to obtain allocation to send the measurement report to Cell 2 on PUSCH.

The overall delay measured may be up to 2xTTI_{DCCH} higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

- NOTE 1: The actual overall delays measured in the test may be up to one DRX cycle higher than the measurement reporting delays above because UE is allowed to delay the initiation of the measurement reporting procedure to the next until the Active Time.
- NOTE 2: In order to calculate the rate of correct events the system simulator shall verify that it has received correct Event A3 measurement report.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The overall delay measured when DRX cycle length is 1280 ms test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty + DRX cycle length

Measurement reporting delay = $T_{measure inter}$

 $T_{measure_inter} = 6400$ ms. When DRX cycle length is 1280 ms then the $T_{measure_inter}$ is 5 x 1280 ms, as defined in Table 8.3.3.3-1.

TTI insertion uncertainty = 2 ms

DRX cycle length = 1280 ms

The overall delay measured when DRX cycle length is 1280 ms shall be less than a total of 7682 ms.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

8.4 E-UTRAN TDD-TDD inter frequency measurements

8.4.1 E-UTRAN TDD-TDD Inter-frequency event triggered reporting under fading propagation conditions in synchronous cells

8.4.1.1 Test purpose

To verify the UE's ability to make a correct reporting of an event under fading propagation conditions in synchronous cells within the E-UTRA TDD inter-frequency cell search requirements. This test will partly verify the TDD-TDD inter-frequency cell search requirements in section 8.1.2.3.

8.4.1.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

8.4.1.3 Minimum conformance requirements

When measurement gaps are scheduled the UE shall be able to identify a new TDD inter-frequency within $T_{Identify_Inter}$ according to the following expression:

$$T_{\text{Identify_Inter}} = T_{\text{Basic_Identify_Inter}} \cdot \frac{480}{T_{\text{Interl}}} \cdot N_{\text{freq}} \quad \textit{ms}$$

Where:

T_{Basic_Identify_Inter} = 480 ms. It is the time period used in the inter frequency equation where the maximum allowed time for the UE to identify a new TDD inter-frequency cell is defined.

 T_{inter1} is defined in TS 36.133 [4] section 8.1.2.1

 N_{freq} is defined in TS 36.133 [4] section 8.1.2.1.1.

A cell shall be considered detectable provided following conditions are fulfilled:

- RSRP $|_{dRm} \ge -125 \text{ dBm}$ and for Bands 33, 34, 35, 36, 37, 38, 39, 40, 42, 43 and RSRP Ês/Iot $\ge -4 \text{ dB}$,
- RSRP $_{dBm} \ge -124$ dBm for Band 41 and RSRP \hat{E} s/Iot ≥ -4 dB,
- other RSRP related side conditions given in Section 9.1 are fulfilled,
- SCH_RP|_{dBm}≥ -125 dBm for Bands 33, 34, 35, 36, 37, 38, 39, 40, 42, 43 and SCH \hat{E} s/Iot ≥ -4 dB.
- SCH_RP $|_{dBm} \ge -124 dBm$ for Band 41 and RSRP $\hat{E}s/Iot \ge -4 dB$,

When measurement gaps are scheduled for TDD inter frequency measurements the UE physical layer shall be capable of reporting measurements to higher layers with measurement accuracy as specified in TS 36.133 sub-clause 9.1.3 with measurement period ($T_{\text{Measurement_Period_TDD_Inter}$) given by table 8.4.4.1.3-1.

Table 8.4.1.3-1: T_{Measurement_Period_TDD_Inter} for different configurations

Configuration	Measurement bandwidth	Number of UL/DL sub-frames per half frame (5 ms)		DwPTS		T _{Measurement_Period_TDD_I} nter [ms]
	[RB]	DL	UL	Normal CP	Extended CP	
0	6	2	2	$19760 \cdot T_{\rm s}$	$20480 \cdot T_{\rm s}$	480 x N _{freq}
1 (Note 1)	50	2	2	$19760 \cdot T_{\rm s}$	$20480 \cdot T_{\rm s}$	240 x N _{freq}
Note 1: This co	onfiguration is option	onal.				

Note 1: This configuration is optional. Note 2: T_s is defined in 3GPP TS 36.211 [9].

The UE shall be capable of performing RSRP and RSRQ measurements of at least 4 inter-frequency cells per TDD inter-frequency and the UE physical layer shall be capable of reporting RSRP and RSRQ measurements to higher layers with the measurement period $T_{\text{Measurement_Period_TDD_Inter.}}$

Reported measurements contained in event triggered measurement reports shall meet the requirements in TS 36.133 [4] clause 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than T $_{Identify_Inter}$ defined in TS 36.133 [4] clause 8.1.2.3.2.1. When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{identify_intra}$ defined in TS 36.133 [4] section 8.1.2.2.1.1 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event, the event triggered measurement reporting delay shall be less than $T_{Measurement_Period\ Intra}$ provided the timing to that cell has not changed more than \pm 50 Ts and the L3 filter has not been used. When L3 filtering is used an additional delay can be expected

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.3.2 and A.8.4.1.

8.4.1.4 Test description

8.4.1.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and faders and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.15.
- 2. The general test parameter settings are set up according to Table 8.4.1.4.1-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 8.4.1.4.3.
- 5. There are two E-UTRA TDD carriers and two cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 8.4.1.4.1-1: General test parameters for E-UTRAN TDD-TDD inter frequency event triggered reporting in fading propagation conditions

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference Measurement	As specified in section A.1.2
		Channel R.0 TDD	
PCFICH/PDCCH/PHICH		DL Reference Measurement	As specified in section A.2.2
parameters		Channel R.6 TDD	
Gap Pattern Id		1	As specified in 3GPP TS 36.133 section 8.1.2.1.
Special subframe configuration		6	As specified in table 4.2-1 in TS 36.211.
			The same configuration in both cells
Uplink-downlink configuration		1	As specified in 3GPP TS 36.211 section 4.2 Table 4.2-2
CP length		Normal	
E-UTRA RF Channel Number		1, 2	Two TDD carrier frequencies are used.
Channel Bandwidth (BW _{channel})	MHz	10	
Active cell		Cell 1	Cell 1 is on RF channel number 1
Neighbour cell		Cell 2	Cell 2 is on RF channel number 2
A3-Offset	dB	-6	
Hysteresis	dB	0	
TimeToTrigger	dB	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	
Time offset between cells	μs	3	Synchronous cells
			3μs or 92*Ts
T1	S	5	
T2	S	10	

8.4.1.4.2 Test procedure

The test consists of two successive time periods, with time durations of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 2. Gap pattern configuration is configured before T2 begins to enable inter-frequency monitoring.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 8.4.1.5-1. Propagation conditions are set according to Annex B clauses B.1.1 and B.2.2. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 8.4.1.5-1.
- 6. UE shall transmit a MeasurementReport message triggered by Event A3. If the measurement reporting delay from the beginning of time period T2 is less than 7682 ms the number of successful tests is increased by one. If the

UE fails to report the event within the measurement reporting delay requirement then the number of failure tests is increased by one.

- 7. After the SS receive the MeasurementReport message in step 6) or when T2 expires, the SS shall transmit an RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A, or
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

8.4.1.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.4.1.4.3-1: Common Exception messages for Additional E-UTRAN TDD-TDD inter frequency event triggered reporting under fading propagation conditions in asynchronous cells test requirement

Default Message Contents				
Common contents of system information				
blocks exceptions				
Default RRC messages and information	Table H3.1-1			
elements contents exceptions	Table H3.1-3			
·	Table H.3.1-7			

Table 8.4.1.4.3-2: ReportConfigEUTRA-A3: Additional E-UTRAN TDD-TDD inter frequency event triggered reporting under fading propagation conditions in asynchronous cells test requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Tal	ole 4.6.6-6 ReportConfigEUTRA	-A3	
Information Element	Value/remark	Comment	Condition
ReportConfigEUTRA ::= SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset	-12 (-6 dB)	-6 is actual value in dB (-12 * 0.5 dB)	
}		ì	
}			
Hysteresis	0 (0 dB)	0 is actual value in dB (0 * 0.5 dB)	
timeToTrigger	0 (0 ms)		
}			
}			

Table 8.4.1.4.3-3: *MeasResults*: Additional E-UTRAN TDD-TDD inter frequency event triggered reporting under fading propagation conditions in asynchronous cells test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld			
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
}			
}			

Table 8.4.1.4.3-4: *MeasResultListEUTRA*: Additional E-UTRAN TDD-TDD inter frequency event triggered reporting under fading propagation conditions in asynchronous cells test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListEUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF MeasResultEUTRA {			
MeasResultEUTRA ::= SEQUENCE {			
physCellId	PhysicalCellIdentity		
measResult SEQUENCE {			
rsrpResult		Set according to	
		specific test	
		INTEGER(097)	
rsrqResult		Set according to	
		specific test	
		INTEGER(034)	
}			
}			

8.4.1.5 Test requirement

Tables 8.4.1.4.1-1 and 8.4.1.5-1 define the primary level settings including test tolerances for event triggered reporting under fading propagation conditions in asynchronous inter frequency cells test.

Table 8.4.1.5-1: Cell specific test parameters for E-UTRAN TDD-TDD inter frequency event triggered reporting under fading propagation conditions in synchronous cells

Parameter	Unit	Cell 1		Ce	II 2
		T1	T2	T1	T2
E-UTRA RF Channel			1		2
Number					
BW _{channel}	MHz		10		10
OCNG Pattern defined		OP.1	I TDD	OP.2	TDD
in D.2.1 (OP.1 TDD)					
and in D.2.2 (OP.2)					
PBCH_RA	dB				
PBCH_RB	dB				
PSS_RA	dB				
SSS_RA	dB				
PCFICH_RB	dB				
PHICH_RA	dB				
PHICH_RB	dB		0		0
PDCCH_RA	dB		U		U
PDCCH_RB	dB				
PDSCH_RA	dB				
PDSCH_RB	dB				
OCNG_RA ^{Note 1}	dB				
OCNG_RB ^{Note 1}	dB				
\hat{E}_s/I_{ot}	dB	4	4	-Infinity	7
Noc Note 3	dBm/15 kHz		·	-98	•
RSRP Note 4	dBm/15 kHz	-94	-94	-Infinity	-91
SCH_RP	dBm/15 kHz	-94	-94	-infinity	-91
\hat{E}_s/N_{oc}	dB	4	4	-Infinity	7
Propagation Condition			E	TU70	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: The resources for uplink transmission are assigned to the UE priori to the start of time period T2.

Note 3: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 4: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 7682 ms from the beginning of time period T2.

TTI insertion uncertainty = 2 ms

The overall delays measured shall be less than a total of 7682 ms in this test case (note: a total of 7680 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

1) NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

8.4.2 E-UTRAN TDD-TDD Inter-frequency event triggered reporting when DRX is used under fading propagation conditions in synchronous cells

8.4.2.1 Test purpose

To verify the UE's ability to make a correct reporting of an event under fading propagation conditions in synchronous cells with DRX within the E-UTRA TDD-TDD inter frequency cell search in DRX requirements.

8.4.2.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

8.4.2.3 Minimum conformance requirements

When DRX is in use the UE shall be able to identify a new detectable E-UTRAN TDD inter frequency cell within $T_{identify_inter}$ as shown in table 8.4.2.3-1.

Table 8.4.2.3-1: Requirement to identify a newly detectable TDD inter frequency cell

DRX cycle	Tidentify_inter (s)	(DRX cycles)	
length (s)	Gap period =	Gap period =	
	40 ms	80 ms	
≤0.16	Non DRX	Non DRX	
	Requirements	Requirements	
	in section	in section	
	8.1.2.3.2.1	8.1.2.3.2.1	
	are applicable	are applicable	
0.256	5.12*Nfreq	7.68*Nfreq	
	(20*Nfreq)	(30*Nfreq)	
0.32	6.4*Nfreq	7.68*Nfreq	
	(20*Nfreq)	(24*Nfreq)	
0.32 <drx-< td=""><td>Note</td><td>Note</td></drx-<>	Note	Note	
cycle≤2.56	(20*Nfreq)	(20*Nfreq)	
Note: Time depends upon the DRX cycle in			
us	se		

A cell shall be considered detectable provided following conditions are fulfilled:

- RSRP|_{dBm}≥ -125 dBm and for Bands 33, 34, 35, 36, 37, 38, 39, 40, 42, 43 and RSRP Ês/Iot ≥ -4 dB,
- RSRP $|_{dBm} \ge -124 dBm$ for Band 41 and RSRP $\hat{E}s/Iot \ge -4 dB$,
- RSRP related side conditions given in TS 36.133 [4] Section 9.1 are fulfilled.
- SCH_RP|_{dBm}≥ -125 dBm for Bands 33, 34, 35, 36, 37, 38, 39, 40, 42, 43 and SCH \hat{E} s/Iot ≥ -4 dB.
- SCH_RP $|_{dBm} \ge -124 dBm$ for Band 41 and RSRP \hat{E} s/Iot $\ge -4 dB$,

The UE shall be capable of performing RSRP and RSRQ measurements of at least 4 inter-frequency cells per TDD inter-frequency and the UE physical layer shall be capable of reporting RSRP and RSRQ measurements to higher layers with the measurement period defined in Table 8.4.2.3-2.

Table 8.4.2.3-2: Requirement to measure TDD inter frequency cells

DRX cycle length (s)	T _{measure_inter} (s) (DRX cycles)	
≤0.84	Non DRX	
	Requirements in	
	section 8.1.2.3.1.1	
	are applicable	
0.08 <drx-< td=""><td>Note (5*N_{freq})</td></drx-<>	Note (5*N _{freq})	
cycle≤2.56		
Note: Time depends upon the DRX		
cycle	e in use	

The measurement accuracy for all measured cells shall be as specified in TS 36.133 [4] sub-clause 9.1.

Reported measurements contained in periodically triggered measurement reports shall meet the requirements in TS 36.133 [4] section 9.

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements in TS 36.133 [4] section 9.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in TS 36.133 [4] section 8.1.2.3.2.2.1.3 Event Triggered Reporting.

Reported measurements contained in event triggered measurement reports shall meet the requirements in TS 36.133 [4] section 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{Identify_Inter}$ defined in TS 36.133 [4] Section 8.1.2.3.2.2 When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{identify_intra}$ defined in TS 36.133 [4] section 8.1.2.2.1.1 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event, the event triggered measurement reporting delay shall be less than $T_{Measurement_Period\ Intra}$ provided the timing to that cell has not changed more than \pm 50 Ts and the L3 filter has not been used. When L3 filtering is used an additional delay can be expected

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.3.2.2 and A.8.4.2.

8.4.2.4 Test description

8.4.2.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and faders and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.15.
- 2. The general test parameter settings are set up according to Table 8.4.2.4.1-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.

- 4. Message contents are defined in clause 8.4.2.4.3.
- 5. There are two cells on different carrier frequencies and gap pattern configuration # 0 as defined in TS 36.133[4] Table 8.1.2.1-1 is provided. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 8.4.2.4.1-1: General test parameters for E-UTRAN TDD-TDD inter-frequency event triggered reporting when DRX is used in fading propagation conditions

Parameter	Unit	Test 1	Test 2	Comment
		Val	ue	
PDSCH parameters		DL Reference Me	asurement	As specified in section A.1.2. Note that UE
		Channel R.0 TDD	l .	may only be allocated at On Duration
PCFICH/PDCCH/PHICH		DL Reference Me	asurement	As specified in section A.2.2.
parameters		Channel R.6 TDD	<u> </u>	
E-UTRA RF Channel		1,	2	Two TDD carrier frequencies are used.
Number				
Channel Bandwidth	MHz	10	0	
(BW _{channel})				
Active cell		Cel	l 1	Cell 1 is on RF channel number 1
Neighbour cell		Cel	12	Cell 2 is on RF channel number 2
Gap Pattern Id		C)	As specified in 3GPP TS 36.133 section
				8.1.2.1.
Uplink-downlink		1		As specified in 3GPP TS 36.211 section
configuration				4.2 Table 4.2-2
Special subframe		6	;	As specified in table 4.2-1 in TS 36.211.
configuration				The same configuration in both cells
A3-Offset	dB	-6		
Hysteresis	dB	C	·	
CP length		Nor	mal	
TimeToTrigger	S	C		
Filter coefficient		C		L3 filtering is not used
PRACH configuration		4	-	As specified in table 5.7.1-3 in TS 36.211
Access Barring Information	-	Not 9	Sent	No additional delays in random access
				procedure.
DRX		0	N	DRX related parameters are defined in
				Table 8.4.2.4.1-2
Time offset between cells	μs	3	-	Synchronous cells
				3μs or 92*Ts
T1	S	5		
T2	S	5	30	

8.4.2.4.2 Test procedure

The test consists of one active cell and one neighbour cell. In the measurement control information it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time durations of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

In Test 1 UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignmend. Furthermore, the UE is allocated with PUSCH resource at every DRX cycle. In Test 2 the uplink time alignment is not maintained and UE needs to use RACH to obtain UL allocation for measurement reporting.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 8.4.2.5-1. Propagation conditions are set according to Annex B clauses B.1.1 and B.2.2. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 8.4.2.5-1.

- 6. UE shall transmit a MeasurementReport message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 3882 ms for Test 1 and 26882 ms for Test 2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.
- 7. After the SS receives the MeasurementReport message in step 6 or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A, or
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.
- 11. Repeat step 1-10 for each sub-test in Table 8.4.2.4.1-1 as appropriate.

8.4.2.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.4.2.4.3-1: Common Exception messages for Additional E-UTRAN TDD-TDD inter-frequency event triggered reporting when DRX is used in fading propagation conditions test requirement

Default Message Contents		
Common contents of system information		
blocks exceptions		
Default RRC messages and information	Table H.3.1-7	
elements contents exceptions	Table H.3.7-1	
·	Table H.3.7-2	
	Table H.3.7-3	

Table 8.4.2.4.3-2: RRCConnectionReconfiguration: Additional E-UTRAN TDD-TDD inter-frequency event triggered reporting when DRX is used in fading propagation conditions test requirement

Derivation Path: TS 36.508 [7] clause 4.6.1, Table 4.6.1-8 RRCConnectionReconfiguration				
Information Element	Value/remark	Comment	Condition	
RRCConnectionReconfiguration ::= SEQUENCE {				
rrc-TransactionIdentifier	RRC-			
	TransactionIdentifier-DL			
criticalExtensions CHOICE {				
c1 CHOICE{				
rrcConnectionReconfiguration-r8 SEQUENCE {				
measConfig				
	MeasConfig-DEFAULT			
radioResourceConfigDedicated	RadioResourceConfigDe dicated- HO			
}				
}		•		
}		•		
}				

Table 8.4.2.4.3-3: MeasConfig-DEFAULT: Additional E-UTRAN TDD-TDD inter-frequency event triggered reporting when DRX is used in fading propagation conditions test requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-1 MeasConfig-DEFAULT:			
Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModList SEQUENCE (SIZE	2 entry		
(1maxObjectId)) OF SEQUENCE {	-		
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f3		
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA- GENERIC(f3)		
}			
}			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f2		
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA- GENERIC(f2)	inter frequency	
}			
}			
}			
reportConfigToRemoveList	Not present		
reportConfigToAddModList SEQUENCE (SIZE (1maxReportConfigId))OF SEQUENCE {	1 entry		
reportConfigld	idReportConfig-A3		
reportConfig	ReportConfigEUTRA-A3		
}			
measIdToRemoveList	Not present		
measIdToAddModList SEQUENCE (SIZE (1maxMeasId)) of SEQUENCE {	1 entry		
measld	1		
measObjectId	IdMeasObject-f2		
reportConfigId	idReportConfig-A3		
}			
quantityConfig	QuantityConfig-DEFAULT		
measGapConfig	MeasGapConfig-GP1		
s-Measure	Not present		
preRegistrationInfoHRPD	Not present		
speedStatePars	Not present		
}			

Table 8.4.2.4.3-4: ReportConfigEUTRA-A3: Additional E-UTRAN TDD-TDD inter-frequency event triggered reporting when DRX is used in fading propagation conditions test requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table	e 4.6.6-6 ReportConfigEUTRA	-A3	
Information Element	Value/remark	Comment	Condition
ReportConfigEUTRA-A3 ::= SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset	-12 (-6 dB)	-6 is actual value in dB (-12 * 0.5 dB)	
reportOnLeave	FALSE		
}			
}			
hysteresis	0 (0 dB)	0 is actual value in dB (0 * 0.5 dB)	
timeToTrigger	0 (0 ms)		
}			
}			

Table 8.4.2.4.3-5: SchedulingRequest-Config-DEFAULT: Additional E-UTRAN TDD-TDD interfrequency event triggered reporting when DRX is used in fading propagation conditions test requirement

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-20: SchedulingRequest-Config-DEFAULT				
Information Element	Value/remark	Comment	Condition	
SchedulingRequest-Config-DEFAULT ::= CHOICE {				
setup SEQUENCE {				
sr-PUCCH-ResourceIndex	41	Channel- bandwidth- dependent parameter		
sr-ConfigIndex	0			
dsr-TransMax	n4			
}				
}				

Table 8.4.2.4.3-6: MeasResults: Additional E-UTRAN TDD-TDD inter-frequency event triggered reporting when DRX is used in fading propagation conditions test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1		
measResultServCell SEQUENCE {			
rsrpResult	INTEGER(097)	Set according to specific test	
rsrqResult	INTEGER(034)	Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
}			
}			

Table 8.4.2.4.3-7: MeasResultListEUTRA: Additional E-UTRAN TDD-TDD inter-frequency event triggered reporting when DRX is used in fading propagation conditions test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultsListEUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId	PhysCellId	INTEGER (0503)	
measResult SEQUENCE {			
rsrpResult		Set according to	
		specific test	
rsrqResult		Set according to	
		specific test	
}			
}			

8.4.2.5 Test requirement

Tables 8.4.2.5-1, 8.4.2.5-2 and 8.4.2.5-3 define the primary level settings including test tolerances for E-UTRAN TDD-TDD intra-frequency event triggered reporting under fading propagation conditions in synchronous cells when DRX is used test.

Table 8.4.2.5-1: Cell specific test parameters for E-UTRAN TDD-TDD inter-frequency event triggered reporting under fading propagation conditions in synchronous cells

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
E-UTRA RF Channel		1		2	
Number					
BW _{channel}	MHz		10	10	
OCNG Patterns		OP.1	I TDD	OP.2	2 TDD
defined in D.2.1 (OP.1					
TDD) and in D.2.2					
(OP.2 TDD)					
PBCH_RA	dB				
PBCH_RB	dB				
PSS_RA	dB				
SSS_RA	dB			0	
PCFICH_RB	dB				
PHICH_RA	dB				
PHICH_RB	dB		0		
PDCCH_RA	dB	0			
PDCCH_RB	dB				
PDSCH_RA	dB				
PDSCH_RB	dB				
OCNG_RA ^{Note 1}	dB				
OCNG_RB ^{Note 1}	dB				
$N_{oc}^{ m Note 2}$	dBm/15 kHz			-98	
RSRP Note 3	dBm/15 kHz	-94	-94	-Infinity	-91
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	dB	4	4	-Infinity	7
SCH_RP Note 3	dBm/15 kHz	-94	-94	-Infinity	-91
\hat{E}_s/N_{oc}	dB	4	4	-Infinity	7
Propagation Condition				ETU70	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{ac} to be fulfilled.

Note 3: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.4.2.5-2: drx-Configuration to be used in E-UTRAN TDD-TDD inter-frequency event triggered reporting when DRX is used in fading propagation conditions

Field	Test1	Test2	Comment
rieid	Value	Value	
onDurationTimer	psf1	psf1	
drx-InactivityTimer	psf1	psf1	
drx-RetransmissionTimer	sf1	sf1	
longDRX-CycleStartOffset	sf40	sf1280	
shortDRX	disable	disable	

Table 8.4.2.5-3: *TimeAlignmentTimer* and *sr-ConfigIndex* -Configuration to be used in E-UTRAN TDD-TDD inter-frequency event triggered reporting when DRX is used in fading propagation conditions

Field	Test1	Test2	Comment
rieid	Value	Value	
TimeAlignmentTimer	sf500	sf500	For further information see section 6.3.2 in 3GPP TS 36.331.
sr-ConfigIndex	0	0	For further information see section 6.3.2 in 3GPP TS 36.331 and 10.1 in 3GPP TS 36.213.

In Test1 when DRX cycle length = 40 ms is used, the overall delay measured is defined as the time from the beginning of time period T2, to the moment when the UE send one Event A3 triggered measurement report on PUSCH.

In Test 2 when DRX cycle length = 1280 ms is used, the overall delay measured is defined as the time from the beginning of time period T2, to the moment the UE starts to send preambles on the PRACH for Scheduling Request (SR) to obtain allocation to send the measurement report to Cell 2 on PUSCH.TTI insertion uncertainty = 2 ms

For both tests:

The overall delay measured may be up to 2xTTI_{DCCH} higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

NOTE 1: The actual overall delays measured in the test may be up to one DRX cycle higher than the measurement reporting delays above because UE is allowed to delay the initiation of the measurement reporting procedure to the next until the Active Time.

NOTE 2: In order to calculate the rate of correct events the system simulator shall verify that it has received correct Event A3 measurement report.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The overall delay measured when DRX cycle length is 40 ms test requirement is expressed as:

Overall delay measured = measurement reporting delay + TTI insertion uncertainty + DRX cycle length

Measurement reporting delay = $T_{Identify\ Inter}$

$$T_{\text{Identify_Inter}} = T_{\text{Basic_Identify_Inter}} \cdot \frac{480}{T_{\text{Interl}}} \cdot N_{\text{freq}} \quad ms$$

Where:

T_{Basic_Identify_Inter} = 480 ms. It is the time period used in the inter frequency equation where the maximum allowed time for the UE to identify a new FDD inter-frequency cell is defined.

 $T_{Inter1} = 60$ ms. It is defined in table 8.1.2.1-1 of TS36.133 [4] clause 8.1.2.1.

 $N_{freq} = 1$. It is defined in TS 36.133 [4] clause 8.1.2.1.1.

TTI insertion uncertainty = 2 ms

DRX cycle length = 40 ms

The overall delay measured when DRX cycle length is 40 ms shall be less than a total of 3882 ms.

The overall delay measured when DRX cycle length is 1280 ms test requirement is expressed as:

Overall delay measured = measurement reporting delay + TTI insertion uncertainty + DRX cycle length

Measurement reporting delay = $T_{identify_inter}$

 $T_{identify_inter} = 25600$ ms. When DRX cycle length is 1280 ms then the $T_{identify_inter}$ is 20 x 1280 ms, as defined in Table 8.4.2.3-1.

TTI insertion uncertainty = 2 ms

DRX cycle length = 1280 ms

The overall delay measured when DRX cycle length is 1280 ms shall be less than a total of 26882 ms.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

8.4.3 E-UTRAN TDD-TDD inter-frequency event triggered reporting under AWGN propagation conditions in synchronous cells with DRX when L3 filtering is used

Editor's note: This section is incomplete. The following aspects are either missing or not yet determined:

- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined

8.4.3.1 Test purpose

To verify the UE's ability to make a correct reporting of an event in DRX when L3 filtering is used in AWGN propagation conditions in synchronous cells within the E-UTRA TDD-TDD inter frequency cell search in DRX requirements and the UE behaviour with the filterCoefficent.

8.4.3.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

8.4.3.3 Minimum conformance requirements

When DRX is in use the UE shall be able to identify a new detectable E-UTRAN TDD inter frequency cell within $T_{identify_inter}$ as shown in table 8.4.3.3-1

Table 8.4.3.3-1: Requirement to identify a newly detectable TDD interfrequency cell

DRX cycle	T _{identify_inter} (s) (DRX cycles)		
length (s)	Gap period	Gap period	
	= 40 ms	= 80 ms	
≤0.16	Non DRX	Non DRX	
	Requirements	Requirements	
	in section	in section	
	8.1.2.3.2.1	8.1.2.3.2.1	
	are applicable	are applicable	
0.256	5.12*Nfreq 7.68*Nfre		
	(20*Nfreq) (30*Nfre		
0.32	6.4*Nfreq	7.68*Nfreq	
	(20*Nfreq)	(24*Nfreq)	
0.32 <drx-< td=""><td>Note</td><td>Note</td></drx-<>	Note	Note	
cycle≤2.56	(20*Nfreq)	(20*Nfreq)	
Note: Time depends upon the DRX cycle in			
use			

A cell shall be considered detectable provided following conditions are fulfilled:

- RSRP_{dBm} \geq -125 dBm and for Bands 33, 34, 35, 36, 37, 38, 39, 40, 42, 43 and RSRP Ês/Iot \geq -4 dB,
- RSRP $|_{dBm} \ge -124$ dBm and for Band 41and RSRP Ês/Iot ≥ -4 dB,
- other RSRP related side conditions given in Section 9.1 are fulfilled,
- SCH_RP|_{dBm}≥ -125 dBm for Bands 33, 34, 35, 36, 37, 38, 39, 40, 42, 43 and SCH \hat{E} s/Iot ≥ -4 dB.
- SCH_RP $|_{dBm} \ge -124 dBm$ for Band 41 and SCH \hat{E} s/Iot $\ge -4 dB$.

The UE shall be capable of performing RSRP and RSRQ measurements of at least 4 inter-frequency cells per TDD inter-frequency for up to 3 TDD inter-frequencies and the UE physical layer shall be capable of reporting RSRP and RSRQ measurements to higher layers with the measurement period defined in Table 8.4.3.3-2.

Table 8.4.3.3-2: Requirement to measure TDD interfrequency cells

DRX cycle length (s)	T _{measure_inter} (s) (DRX cycles)	
≤0.08	Non DRX	
	Requirements in	
	section 8.1.2.3.2.1	
	are applicable	
0.08 < DRX-	Note (5*N _{freq})	
cycle ≤ 2.56	,	
Note: Time depends upon the DRX		
cycle in use		

The measurement accuracy for all measured cells shall be as specified in the TS 36.133 [4] sub-clause 9.1.

Reported measurements contained in periodically triggered measurement reports shall meet the requirements in TS 36.133 [4] section 9.

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements in TS 36.133 [4] section 9.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in TS 36.133 [4] section 8.1.2.3.2.2.1.3 Event Triggered Reporting.

Reported measurements contained in event triggered measurement reports shall meet the requirements in TS 36.133 [4] section 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{Identify_Inter}$ defined in TS 36.133 [4] Section 8.1.2.3.2.2. When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{Identify_Inter}$ in TS 36.133 [4] section 8.1.2.3.2.2 and then enters or leaves the reporting range, the event triggered measurement reporting delay shall be less than $T_{measure_inter}$ in TS 36.133 [4] section 8.1.2.3.2.2 provided the timing to that cell has not changed more than \pm 50 Ts while measurement gap has not been available and the L3 filter has not been used. When L3 filtering is used an additional delay can be expected.

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.3.2.2 and A.8.4.3.

8.4.3.4 Test description

8.4.3.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14.
- 2. The general test parameter settings are set up according to Table 8.4.3.4.1-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 8.4.3.4.3.
- 5. There is one E-UTRA TDD carrier and two cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 8.4.3.4.1-1: General test parameters for E-UTRAN TDD-TDD inter-frequency event triggered reporting under AWGN propagation conditions with DRX when L3 filtering is used

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference Measurement Channel R.0 TDD	As specified in section A.1.2
PCFICH/PDCCH/PHICH parameters		DL Reference Measurement Channel R.6 TDD	As specified in section A.2.2
Active cell		Cell 1	
Neighbour cell		Cell 2	Cell to be identified.
E-UTRA RF Channel Number		1, 2	Two TDD carrier frequencies are used.
Channel Bandwidth (BW _{channel})	MHz	10	
Time offset between cells	μs	3	synchronous cells
Gap Pattern Id		1	As specified in 3GPP TS 36.133 [4] section 8.1.2.1
Uplink-downlink configuration of cells		1	As specified in table 4.2.2 in TS 36.211
Special subframe configuration of cells		6	As specified in table 4.2.1 in TS 36.211
Neighbour A3-Offset Ofn	dB	-14	
CP length		Normal	
Hysteresis	dB	0	
Time To Trigger	S	0	
Filter coefficient		9	L3 filtering is used
DRX		ON	DRX related parameters are defined in Table 8.4.3.5-2
T1	S	30	
T2	S	7	

8.4.3.4.2 Test procedure

The test consists of one active cell and one neighbour cell. In the measurement control information it is indicated to the UE that event-triggered reporting with Event A3 and the filter coefficient is used. The test consists of two successive time periods, with time durations of T1 and T2 respectively.

In the Test when DRX = 1280 ms is used, a non-zero L3 filtering is configured. The uplink time alignment is not maintained and UE needs to use RACH to obtain UL allocation for measurement reporting.

1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.

- 2. Set the parameters according to T1 in Table 8.4.3.5-1. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 8.4.3.5-1 and 8.4.3.5-2.
- 6. UE shall transmit a MeasurementReport message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 7682 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.
- 7. After the SS receive the MeasurementReport message in step 6) or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A,

or

- switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

8.4.3.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.4.3.4.3-1: Common Exception messages for E-UTRAN TDD-TDD inter-frequency event triggered reporting under AWGN propagation conditions with DRX when L3 filtering is used in test requirement

Default Message Contents				
Common contents of system information				
blocks exceptions				
Default RRC messages and information	Table H.3.7-2			
elements contents exceptions	Table H.3.7-3			

Table 8.4.3.4.3-2: RRCConnectionReconfiguration: Additional E-UTRAN TDD-TDD inter-frequency event triggered reporting under AWGN propagation conditions with DRX when L3 filtering is used in test requirement

Information Element	Value/remark	Comment	Condition
RRCConnectionReconfiguration ::= SEQUENCE {			
rrc-TransactionIdentifier	RRC-		
	TransactionIdentifier-DL		
criticalExtensions CHOICE {			
c1 CHOICE{			
rrcConnectionReconfiguration-r8 SEQUENCE {			
measConfig	MeasConfig -DEFAULT		
radioResourceConfigDedicated	RadioResourceConfigDed		
· ·	icated-HO		
}			
}			
}			

Table 8.4.3.4.3-3: *MeasConfig-DEFAULT*: Additional E-UTRAN TDD-TDD inter-frequency event triggered reporting under AWGN propagation conditions with DRX when L3 filtering is used in test requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-1 MeasConfig-DEFAULT:				
Information Element	Value/remark	Comment	Condition	
MeasConfig-DEFAULT ::= SEQUENCE {				
measObjectToRemoveList	Not present			
measObjectToAddModList SEQUENCE (SIZE	2 entry			
(1maxObjectId)) OF SEQUENCE {				
MeasObjectToAddMod SEQUENCE {				
measObjectId	IdMeasObject-f3			
measObject CHOICE {				
MeasObjectEUTRA	MeasObjectEUTRA-			
,	GENERIC(f3)			
}				
}				
MeasObjectToAddMod SEQUENCE {				
measObjectId	IdMeasObject-f2			
measObject CHOICE {				
MeasObjectEUTRA	MeasObjectEUTRA-	inter frequency		
,	GENERIC(f2)	. ,		
}	<u> </u>			
}				
}				
reportConfigToRemoveList	Not present			
reportConfigToAddModList SEQUENCE (SIZE	1 entry			
(1maxReportConfigId))OF SEQUENCE {	-			
reportConfigId	idReportConfig-A3			
reportConfig	ReportConfigEUTRA-A3			
}	-			
measIdToRemoveList	Not present			
measIdToAddModList SEQUENCE (SIZE	1 entry			
(1maxMeasId)) of SEQUENCE {	-			
measld	1			
measObjectId	IdMeasObject-f2			
reportConfigId	idReportConfig-A3			
}				
quantityConfig	QuantityConfig-			
	DEFAULT			
measGapConfig	MeasGapConfig-GP2			
s-Measure	Not present			
preRegistrationInfoHRPD	Not present			
speedStatePars	Not present			
}				

Table 8.4.3.4.3-4: *MeasObjectEUTRA-GENERIC(f2)*: Additional E-UTRAN TDD-TDD inter-frequency event triggered reporting under AWGN propagation conditions with DRX when L3 filtering is used test requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.	6-2 MeasObjectEUTRA-GEN	IERIC(Freq)	
Information Element	Value/remark	Comment	Condition
MeasObjectEUTRA-GENERIC(Freq) ::= SEQUENCE			
{			
carrierFreq	Downlink EARFCN for		
	frequency f2 defined in		
	36.508		
allowedmeasBandwidth	The number of the		
	resource blocks for		
	frequency f2		
presenceAntennaPort1	FALSE		
neighCellConfig	'10'B (The MBSFN		
	subframe allocations of		
	all neighbour cells are		
	identical to or subsets of		
	that in the serving cells)		
offsetFreq	dB-14	-14 dB is actual	
		value in dB (Value	
		dB-14	
		corresponds to -	
		14 dB)	
cellsToRemoveList	Not present		
cellsToAddModList	Not present		
blackCellsToRemoveList	Not present		
blackCellsToAddModList	Not present		
cellForWhichToReportCGI	Not present		
}			

Table 8.4.3.4.3-5: ReportConfigEUTRA-A3: Additional E-UTRAN TDD-TDD inter-frequency event triggered reporting under AWGN propagation conditions with DRX when L3 filtering is used in test requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-6 ReportConfigEUTRA-A3			
Information Element	Value/remark	Comment	Condition
ReportConfigEUTRA-A3 ::= SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventid CHOICE {			
eventA3 SEQUENCE {			
a3-Offset	0 (0 dB)	The actual value is IE value * 0.5 dB IE Value INTEGER (-30 30)	
reportOnLeave	FALSE		
}			
}			
hysteresis	0 (0 dB)	The actual value is IE value * 0.5 dB	
timeToTrigger	0 (0 ms)		
}			
}			

Table 8.4.3.4.3-6: SchedulingRequest-Config-DEFAULT: Additional E-UTRAN TDD-TDD interfrequency event triggered reporting under AWGN propagation conditions with DRX when L3 filtering is used test requirement

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-20 SchedulingRequest-Config-DEFAULT					
Information Element	Value/remark	Comment	Condition		
SchedulingRequest-Config-DEFAULT ::= CHOICE {					
setup SEQUENCE {					
sr-PUCCH-ResourceIndex	41	10 MHz channel bandwidth parameter			
sr-ConfigIndex	0				
dsr-TransMax	n4				
}					
}					

Table 8.4.3.4.3-7: *MeaResults*: Additional E-UTRAN TDD-TDD inter-frequency event triggered reporting under AWGN propagation conditions with DRX when L3 filtering is used test requirement

Derivation Path: 36.331 clause 6.3.5	V-1	0 1	0 1111
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1	Identifies the	
		measurement id	
		for the reporting	
		being performed	
measResultServCell SEQUENCE {			
rsrpResult		Set according to	
		specific test	
rsrqResult		Set according to	
		specific test	
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
}			
}			

Table 8.4.3.4.3-8: MeasResultListEUTRA: Additional E-UTRAN TDD-TDD inter-frequency event triggered reporting under AWGN propagation conditions with DRX when L3 filtering is used test requirement

Information Element	Value/remark	Comment	Condition
MeasResultListEUTRA ::= SEQUENCE (SIZE			
1maxCellReport)) OF MeasResultEUTRA {			
physCellId	PhysCellId		
measResult SEQUENCE {			
rsrpResult		Set according to specific test INTEGER(097)	
rsrqResult		Set according to specific test INTEGER(034)	
}			

Table 8.4.3.4.3-9: FilterCoefficient: Additional E-UTRAN TDD-TDD inter-frequency event triggered reporting under AWGN propagation conditions with DRX when L3 filtering is used test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
filterCoefficient	fc9		

8.4.3.5 Test requirement

Tables 8.4.3.4.1-1, 8.4.3.5-1, 8.4.3.5-2 and 8.4.3.5-3 define the primary level settings including test tolerances for E-UTRAN FDD-FDD inter-frequency event triggered reporting under AWGN propagation conditions in asynchronous cells with DRX when L3 filtering is used test.

Table 8.4.3.5-1: Cell specific test parameters for E-UTRAN TDD-TDD inter-frequency event triggered reporting under AWGN propagation conditions with DRX when L3 filtering is used

Parameter	Unit	Ce	ell 1		Cell 2
		T1	T1 T2		T2
E-UTRA RF Channel		1			2
Number					
BW _{channel}	MHz	1	0		10
OCNG Patterns					
defined in D.2.1 (OP.1		OP 1	TDD	OP	.2 TDD
TDD) and in D.2.2		01.1	100		.2 100
(OP.2 TDD)					
PBCH_RA	dB				
PBCH_RB	dB				
PSS_RA	dB				
SSS_RA	dB				
PCFICH_RB	dB				
PHICH_RA	dB				
PHICH_RB	dB		0		0
PDCCH_RA	dB				
PDCCH_RB	dB				
PDSCH_RA	dB				
PDSCH_RB	dB				
OCNG_RA ^{Note 1}	dB				
OCNG_RB ^{Note 1}	dB				
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	dB	4+TT	4+TT	4+TT	24+TT
$N_{oc}^{ m Note 2}$	dBm/15 KHz	•		-98	
\hat{E}_s/N_{oc}	dB	4+TT	4+TT	4+TT	24+TT
RSRP Note 3	dBm/15 KHz	-94+TT	-94+TT	-94+TT	-74+TT
SCH_RP Note 3	dBm/15 KHz	-94+TT	-94+TT	-94+TT	-74+TT
Propagation Condition		AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{ac} to be fulfilled.

Note 3: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.4.3.5-2: DRX-Configuration for E-UTRAN TDD-TDD inter-frequency event triggered reporting in DRX under AWGN propagation conditions with DRX when L3 filtering is used

Field	Value	Comment
onDurationTimer	psf1	As specified in section 6.3.2 in
drx-InactivityTimer	psf1	3GPP TS 36.331 [5].
drx-RetransmissionTimer	sf1	
longDRX-CycleStartOffset	sf1280	
shortDRX	disable	

Table 8.4.3.5-3: TimeAlignmentTimer -Configuration for E-UTRAN TDD-TDD inter-frequency event triggered reporting in DRX under AWGN propagation conditions with DRX when L3 filtering is used

Field	Value	Comment
TimeAlignmentTimer	sf500	As specified in section 6.3.2 in 3GPP TS 36.331 [5].
sr-ConfigIndex	0	For further information see section 6.3.2 in 3GPP TS 36.331 [5] and section 10.1 in 3GPP TS 36.213 [8].

The overall delay measured is defined as the time from the beginning of time period T2, to the moment the UE starts to send preambles on the PRACH for Scheduling Request (SR) to obtain allocation to send the measurement report to Cell 2 on PUSCH.

The overall delay measured may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

NOTE 1: The actual overall delays measured in the test may be up to one DRX cycle higher than the measurement reporting delays above because UE is allowed to delay the initiation of the measurement reporting procedure to the next until the Active Time.

NOTE 2: In order to calculate the rate of correct events the system simulator shall verify that it has received correct Event A3 measurement report.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The overall delay measured when DRX cycle length is 1280 ms test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty + DRX cycle length

Measurement reporting delay = $T_{measure inter}$

 $T_{measure_inter} = 6400$ ms. When DRX cycle length is 1280 ms then the $T_{measure_inter}$ is 5 x 1280 ms, as defined in Table 8.4.3.3-1.

TTI insertion uncertainty = 2 ms

DRX cycle length = 1280 ms

The overall delay measured when DRX cycle length is 1280 ms shall be less than a total of 7682 ms.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

8.5 E-UTRAN FDD - UTRAN measurements

8.5.1 E-UTRAN FDD - UTRAN FDD event triggered reporting under fading propagation conditions

8.5.1.1 Test purpose

To verify the UE's ability to make a correct reporting of an event under fading propagation conditions within the E-UTRA FDD - UTRA FDD cell search requirements.

8.5.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward that support UTRA FDD.

8.5.1.3 Minimum conformance requirements

The measurement reporting delay shall be less than T_{identify, UTRA FDD} in RRC_CONNECTED state.

When explicit neighbour list is provided and no DRX is used the UE shall be able to identify a new detectable cell within

$$T_{\text{identify, UTRA_FDD}} = T_{\text{basic_identify_UTRA_FDD}} \cdot \frac{480}{T_{\text{interd}}} \cdot N_{\text{Freq}} \quad \textit{ms}$$

Where:

 $T_{basic_identify_UTRA_FDD} = 300$ ms. This is the time period used in the inter-RAT equation where the maximum allowed time for the UE to identify a new UTRA FDD cell is defined.

 T_{Inter1} = 30 ms. This is the minimum available time for inter-RAT measurement during 480 ms period

N_{Freq}: This is the number of UTRA carriers being monitored

A cell shall be considered detectable when

- CPICH Ec/Io \geq -20 dB,
- SCH_Ec/Io ≥ -17 dB for at least one channel tap and SCH_Ec/Ior is equally divided between primary synchronisation code and secondary synchronisation code. When L3 filtering is used an additional delay can be expected.

When measurement gaps are scheduled for UTRA FDD inter RAT measurement the UE physical layer shall be capable of reporting measurements to higher layers with measurement accuracy as specified in TS 36.133 [4] clause 9.2 of with measurement period given by

$$T_{\text{measurement_UTRA_FDD}} = Max \left\{ T_{\text{Measurement_Period UTRA_FDD}}, T_{\text{basic_measurement_UTRA_FDD}} \cdot \frac{480}{T_{\text{inter1}}} \cdot N_{\text{Freq}} \right\} ms$$

Where:

 $X_{\text{basic measurement UTRA_FDD}} = 6 \text{ (cells)}$

 $T_{\text{Measurement Period UTRA FDD}} = 480 \text{ ms.}$ The period used for calculating the measurement period.

 $T_{basic_measurement_UTRA_FDD} = 50$ ms. This is the time period used in the equation where the maximum allowed time for the UE to identify a new UTRA FDD cell is defined.

 $T_{Inter1} = 30$ ms. This is the minimum available time for inter-RAT measurement during 480 ms period

N_{Freq}: This is the number of UTRA carriers being monitored

If the UE does not need measurement gaps to perform UTRA FDD measurements, the measurement period for UTRA FDD measurements is 480 ms.

The UE shall be capable of performing UTRA FDD CPICH measurements for $X_{\text{basic measurement UTRA_FDD}}$ inter-frequency cells per FDD frequency and the UE physical layer shall be capable of reporting measurements to higher layers with the measurement period of $T_{\text{Measurement_UTRA_FDD}}$.

Reported measurements contained in event triggered measurement reports shall meet the requirements in TS 36.133 [4] clause 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between any events that will trigger a measurement report until the UE starts to transmit the measurement report over the Uu interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: twice the TTI of the uplink DCCH. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify\ UTRA_FDD}$ defined in TS 36.133 [4] clause 8.1.2.4.1.1.1. When L3 filtering is used an additional delay can be expected.

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.4.1 and A.8.5.1.

8.5.1.4 Test description

8.5.1.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and faders and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.23.
- 2. The general test parameter settings are set up according to Table 8.5.1.4.1-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 8.5.1.4.3.
- 5. There is one E-UTRA FDD serving cell and one UTRA FDD cell specified in the test. Cell 1 (E-UTRA FDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 8.5.1.4.1-1: General Test Parameters for E-UTRAN FDD- UTRAN FDD event triggered reporting under fading propagation conditions

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference Measurement Channel R.0 FDD	As specified in section A.1.1
PCFICH/PDCCH/PHICH parameters		DL Reference Measurement Channel R.6 FDD	As specified in section A.2.1
Gap Pattern Id		1	As specified in 3GPP TS 36.133 [4] section 8.1.2.1.
Active cell		Cell 1	Cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		Cell 2	Cell 2 is on UTRA RF channel number 1.
CP length		Normal	Applicable to Cell 1
E-UTRA RF Channel Number		1	One E-UTRA FDD carrier frequency is used.
E-UTRA Channel Bandwidth (BWchannel)	MHz	10	
UTRA RF Channel Number		1	One UTRA FDD carrier frequency is used.
Inter-RAT (UTRA FDD) measurement quantity		CPICH Ec/Io	
b1-Threshold-UTRA	dB	-18	CPICH Ec/lo threshold for event B1.
Hysteresis	dB	0	
Time To Trigger	ms	0	
Filter coefficient		0	L3 filtering is not used.
DRX		OFF	
Monitored UTRA FDD cell list size		12	UTRA cells on UTRA RF channel 1 provided in the cell list.
T1	S	5	
T2	s	6	

8.5.1.4.2 Test procedure

The test consists of one active cell and one neighbour cell. In the measurement control information it is indicated to the UE that event-triggered reporting with Event B1 is used. The test consists of two successive time periods, with time durations of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table's 8.5.1.5-1 and 8.5.1.5-2. Propagation conditions are set according to Annex B clauses B.1.1 and B.2.2.. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- ${\it 4. The UE shall transmit RRCConnection Reconfiguration Complete message.}$
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table's 8.5.1.5-1 and 8.5.1.5-2.
- 6. UE shall transmit a MeasurementReport message triggered by Event B1. If the overall delay measured from the beginning of time period T2 is less than 4802 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.
- 7. After the SS receive the MeasurementReport message in step 6) or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. The SS shall set Cell 2 primary scrambling code = ((current cell 2 primary scrambling code 50) mod 200 + 100) for the next iteration of the test procedure loop.

- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A,
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

8.5.1.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.5.1.4.3-1: Common Exception messages for E-UTRAN FDD - UTRAN FDD event triggered reporting under fading propagation conditions

Default Message Co	ntents
Common contents of system information	
blocks exceptions	
Default RRC messages and information	Table H.3.1-1
elements contents exceptions	Table H.3.1-4
·	Table H.3.1-7

Table 8.5.1.4.3-3: ReportConfigInterRAT-B1-UTRA: Additional E-UTRAN FDD - UTRAN FDD event triggered reporting under fading propagation conditions

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4. Information Element	Value/remark	Comment	Condition
	value/Telliai k	Comment	Condition
ReportConfigInterRAT-B1-UTRA(UTRA-Thres) ::=			
SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventB1 SEQUENCE {			
b1-Threshold CHOICE {			
b1-ThresholdUTRA CHOICE {			
utra-EcN0	13 (-18 dB)	-18 dB is actual	
	, ,	EcNO value in dB	
		((13 - 49)/2 dB)	
}			
}			
}			
}			
hysteresis	0 (0 dB)	0 is actual value in	
,	,	dB (0 * 0.5 dB)	
}			
}			1
, ,			

Table 8.5.1.4.3-4: *MeasResults*: Additional E-UTRAN FDD - UTRAN FDD event triggered reporting under fading propagation conditions

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListUTRA }	MeasResultListUTRA		
}			

Table 8.5.1.4.3-5: *MeasResultListUTRA*: Additional E-UTRAN FDD - UTRAN FDD event triggered reporting under fading propagation conditions

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId CHOICE {			
fdd	250	PhysCellIdUTRA-	
		FDD INTEGER	
		(0511)	
}			
measResult SEQUENCE {			
utra-EcN0		Set according to	
		specific test	
}			
}			

8.5.1.5 Test requirement

Tables 8.5.1.4.1-1, 8.5.1.5-1 and 8.5.1.5-2 define the primary level settings including test tolerances for E-UTRAN FDD - UTRAN FDD event triggered reporting under fading propagation conditions in synchronous cells test.

Table 8.5.1.5-1: Cell Specific Test requirement Parameters for E-UTRAN FDD (Cell 1) for event triggered reporting of UTRAN FDD cell under fading propagation conditions

Parameter	Unit	Cell 1			
		T1	T2		
E-UTRA RF Channel Number		1			
BW _{channel}	MHz	10			
OCNG Pattern defined in D.1.1		OP.1 F	DD		
(OP.1 FDD)					
PBCH_RA	dB				
PBCH_RB	dB				
PSS_RA	dB				
SSS_RA	dB				
PCFICH_RB	dB				
PHICH_RA	dB	0			
PHICH_RB	dB				
PDCCH_RA	dB	ľ			
PDCCH_RB	dB				
PDSCH_RA	dB				
PDSCH_RB	dB				
OCNG_RA ^{Note 1}	dB				
OCNG_RB ^{Note 1}	dB				
$\hat{f E}_{ m s}/{ m I}_{ m ot}$	dB	4	4		
\hat{E}_s/N_{oc}	dB	4	4		
N_{oc}	dBm/15 kHz	-98			
RSRP	dBm/15 kHz	-94	-94		
SCH_RP	dBm/15 kHz	-94	-94		
Propagation Condition		ETU7	0		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Table 8.5.1.5-2: Cell Specific Test requirement Parameters for Cell 2 UTRAN FDD event triggered reporting under fading propagation conditions

Parameter	Unit	Cell	2
		T1	T2
UTRA RF Channel Number		1	
CPICH_Ec/lor	dB	-10	
PCCPCH_Ec/lor	dB	-12	
SCH_Ec/lor	dB	-12	
PICH_Ec/lor	dB	-15	
DPCH_Ec/lor	dB	N/A	
OCNS		-0.94	1
\hat{I}_{or}/I_{oc}	dB	-Infinity	-1.8
I_{oc}	dBm/3.84 MHz	-70	
CPICH_Ec/lo	dB	-Infinity	-14
Propagation Condition		Case 5 (Note 3)	

Note 1: The DPCH level is controlled by the power control loop.

Note 2: The power of the OCNS channel that is added shall make the total power from the cell to be equal to I_{or}.

Note 3: Case 5 propagation conditions are defined in Annex A of 3GPP TS 25.101.

The overall delays measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event B1 triggered measurement report to Cell 2.

The overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

 $Measurement \ reporting \ delay = T_{identify, \ UTRA_FDD}$

$$T_{\text{identify, UTRA_FDD}} = T_{\text{basic_identify_UTRA_FDD}} \cdot \frac{480}{T_{\text{interl}}} \cdot N_{\text{Freq}} \quad ms$$

 $T_{basic\ identify\ UTRA\ FDD} = 300\ ms$

 $T_{Inter1} = 30 \text{ ms}$

 $N_{\text{Freq}} = 1$

TTI insertion uncertainty = 2 ms

The overall delays measured shall be less than a total of 4802 ms in this test case (note: this gives a total of 4800 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

8.5.2 E-UTRAN FDD - UTRAN FDD SON ANR cell search reporting under AWGN propagation conditions

Editor's note: This section is incomplete. The following aspects are either missing or not yet determined:

- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined

8.5.2.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of the strongest UTRAN cell for SON automatic neighbour relations. This test will partly verify the E-UTRAN FDD - UTRAN FDD cell search requirements for identification of a new UTRA FDD cell for SON given in TS36.133 [4] section 8.1.2.4.7.1. 1.

8.5.2.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward that support UTRA FDD.

8.5.2.3 Minimum conformance requirements

When no DRX is used the UE shall be able to identify a new cell within:

$$T_{\text{identify, UTRA_FDD}} = T_{\text{basic_identify_UTRA_FDD}} \cdot \frac{480}{\text{Tinter1}} \cdot N_{\text{Freq}} \quad \text{ms}$$

 $T_{basic_identify_UTRA_FDD} = 300$ ms. This is the time period used in the above equation where the maximum allowed time for the UE to identify a new UTRA FDD cell is defined.

A cell shall be considered identifiable following conditions are fulfilled:

- CPICH Ec/Io \geq -20 dB,
- SCH_Ec/Io ≥ -17 dB for at least one channel tap and SCH_Ec/Ior is equally divided between primary synchronisation code and secondary synchronisation code. When L3 filtering is used an additional delay can be expected.

If the UE is unable to identify the UTRA cell for SON within 8*T_{identify, UTRA_FDD} ms, the UE may stop searching UTRA cells for SON.

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.4.7 and A.8.5.2.

8.5.2.4 Test description

8.5.2.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and faders and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.22.
- 2. The general test parameter settings are set up according to Table 8.5.2.4.1-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 8.5.2.4.3.
- 5. There is one E-UTRA FDD serving cell and one UTRA FDD cell specified in the test. Cell 1 (E-UTRA FDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 8.5.2.4.1-1: General test parameters for E-UTRAN FDD-UTRAN FDD cell search reporting for SON ANR in AWGN propagation conditions

Parameter	Unit	Value	Comment
PDSCH parameters (E-UTRAN FDD)		DL Reference Measurement Channel R.0 FDD	As specified in section A.1.1.
PCFICH/PDCCH/PHICH parameters		DL Reference Measurement	As specified in section A.2.1.
(E-UTRAN FDD)		Channel R.6 FDD	
Gap Pattern Id		1	As specified in 3GPP TS 36.133 section 8.1.2.1.
Active cell		Cell 1	Cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		Cell 2	Cell 2 is on UTRA RF channel number 1.
CP length		Normal	Applicable to cell 1
E-UTRA RF Channel Number		1	One E-UTRA FDD carrier frequency is used.
E-UTRA Channel Bandwidth	MHz	10	
(BW _{channel})			
UTRA RF Channel Number		1	One UTRA FDD carrier frequency is used.
Inter-RAT (UTRA FDD) measurement quantity		CPICH Ec/Io	
Filter coefficient		0	L3 filtering is not used.
DRX		OFF	j
Monitored UTRA FDD cell list size		None	No explicit neighbour list is provided to the UE
T1	S	>5	During T1, cell 2 shall be powered off, and during the off time the primary scrambling
			code shall be changed, The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T2.
T2	S	6	

8.5.2.4.2 Test procedure

The test consists of one active E-UTRAN cell and one neighbour UTRAN cell. In the measurement control information it is indicated to the UE that periodical reporting with the purpose 'reportStrongestCellsForSON' is used. The test consists of two successive time periods, with time durations of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.

- 2. Set the parameters according to T1 in Tables 8.5.2.5-1 and 8.5.2.5-2. Propagation conditions are set according to Annex B clauses B.1.1. T1 starts.
- 3. The SS shall set Cell 2 primary scrambling code = ((current cell 2 primary scrambling code 50) mod 200 + 100) for next iteration of the test procedure loop.
- 4. SS shall transmit an RRCConnectionReconfiguration message.
- 5. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Tables 8.5.2.5-1 and 8.5.2.5-2.
- 7. The UE shall transmit a MeasurementReport message containing the primary scrambling code of cell 2. If the overall delays measured from the beginning of time period T2 is less than 4802 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.
- 8. After the SS receive the MeasurementReport message in step 7) or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A, or
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

8.5.2.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.5.2.4.3-1: Common Exception messages for E-UTRAN FDD-UTRAN FDD cell search reporting for SON ANR in AWGN propagation conditions

Default Message Contents		
Common contents of system information		
blocks exceptions		
Default RRC messages and information	Table H.3.1-1	
elements contents exceptions	Table H.3.1-7	

Table 8.5.2.4.3-2: *MeasConfig-DEFAULT*: Additional E-UTRAN FDD-UTRAN FDD cell search reporting for SON ANR in AWGN propagation conditions

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6	6.6-1 MeasConfig-DEFAULT		
Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModList SEQUENCE (SIZE	2 entry		
(1maxObjectId)) OF MeasObjectToAddMod			
MeasObjectToAddMod ::= SEQUENCE {			
measObjectId	IdMeasObject-f1		
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA- GENERIC(f1)	E-UTRA Cell	
}			
}			
MeasObjectToAddMod ::= SEQUENCE {			
measObjectId	IdMeasObject-f8		
measObject CHOICE {			
MeasObjectUTRA	MeasObjectUTRA- GENERIC(f8)	UTRA Cell	
}			
}			
reportConfigToRemoveList	Not present		
reportConfigToAddModList SEQUENCE (SIZE (1maxReportConfigId))OF ReportConfigToAddMod	1 entry		
ReportConfigToAddMod ::= SEQUENCE {			
reportConfigId	idReportConfig		
reportConfig CHOICE {			
reportConfigInterRAT	ReportConfigInterRAT- SON-UTRA		
}			
}			
measIdToRemoveList	Not present		
measIdToAddModList SEQUENCE (SIZE (1maxMeasId)) of MeasIdToAddMod	1 entry		
MeasIdToAddMod ::= SEQUENCE {			
measld	1		
measObjectId	IdMeasObject-f8		
reportConfigld	idReportConfig		
}			
quantityConfig	QuantityConfig-DEFAULT		
measGapConfig	MeasGapConfig-GP2		
s-Measure	Not present		
preRegistrationInfoHRPD	Not present		
speedStatePars	Not present		
}			

Table 8.5.2.4.3-3: ReportConfigInterRAT-SON-UTRA: Additional E-UTRAN FDD-UTRAN FDD cell search reporting for SON ANR in AWGN propagation conditions

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
ReportConfigInterRAT-SON-UTRA::= SEQUENCE {			
triggerType CHOICE {			
periodical SEQUENCE {			
purpose ENUMERATED {	reportStrongestCellsForS ON		
}			
}			
}			
maxReportCells	1		
reportInterval	ms1024		
reportAmount	1		
}			

Table 8.5.2.4.3-4: *MeasResults*: Additional E-UTRAN FDD-UTRAN FDD cell search reporting for SON ANR in AWGN propagation conditions

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListUTRA	MeasResultListUTRA		
}			
}			

Table 8.5.2.4.3-5: *MeasResultListUTRA*: Additional E-UTRAN FDD-UTRAN FDD cell search reporting for SON ANR in AWGN propagation conditions

Information Element	Value/remark	Comment	Condition
MeasResultListUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF MeasResultUTRA			
MeasResultUTRA ::= SEQUENCE {			
physCellId CHOICE {			
fdd	PhysCellIdUTRA-FDD	The primary scrambling code, as defined in TS 25.331	
}			
measResult SEQUENCE {			
utra-EcN0		Set according to specific test	
}			
}			
}			
}			

8.5.2.5 Test requirement

Tables 8.5.2.4.1-1, 8.5.2.5-1 and 8.5.2.5-2 define the primary level settings including test tolerances for UTRAN FDD cell search for SON ANR under AWGN propagation conditions test.

Table 8.5.2.5-1: Cell specific test parameters for E-UTRAN FDD (cell # 1) for UTRAN FDD cell search for SON ANR under AWGN propagation conditions

Parameter	Unit	Cell 1		
		T1	T2	
E-UTRA RF Channel Number		1		
BW _{channel}	MHz	10		
OCNG Pattern defined in		OP.1 F	:DD	
D.1.1 (OP.1 FDD)		OF.17	00	
PBCH_RA	dB			
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB	0		
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA ^{Note 1}	dB			
OCNG_RB ^{Note 1}	dB			
\hat{E}_{s}/I_{ot}	dB	4 + TT	4 + TT	
Noc Note 3	dBm/15 kHz	-98		
\hat{E}_s/N_{oc}	dB	4 + TT	4 + TT	
RSRP Note 4	dBm/15 kHz	-94 + TT	-94 + TT	
SCH_RP	dBm/15 kHz	-94 + TT	-94 + TT	
Propagation Condition		AWGN		

- Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
- Note 3: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
- Note 4: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.5.2.5-2: Cell specific test parameters for UTRAN FDD (cell # 2) for UTRAN FDD cell search for SON ANR under AWGN propagation conditions

Parameter	Unit	Cell 2		
		T1	T2	
UTRA RF Channel Number		1		
CPICH_Ec/lor	dB	-10		
PCCPCH_Ec/lor	dB	-12		
SCH_Ec/lor	dB	-12		
PICH_Ec/lor	dB	-15		
DPCH_Ec/lor	dB	N/A		
OCNS		-0.94	1	
\hat{I}_{or}/I_{oc}	dB	-Infinity	-3.35 + TT	
I_{oc}	dBm/3.84 MHz	-70		
CPICH_Ec/lo	dB	-Infinity	-15 + TT	
Propagation Condition		AWGN		

Note 1: The DPCH level is controlled by the power control loop.

Note 2: The power of the OCNS channel that is added shall make the total power from the cell to be equal to I_{or}

The UE shall send the first measurement report containing the primary scrambling code of cell 2, with a measurement reporting delay less than 4802 ms from the beginning of time period T2.

When no DRX is used the UE shall be able to identify a new cell within:

$$T_{\text{identify, UTRA_FDD}} = T_{\text{basic_identify_UTRA_FDD}} \cdot \frac{480}{\text{Tinter1}} \cdot N_{\text{Freq}} \quad \text{ms}$$

Where:

 $T_{basic_identify_UTRA_FDD} = 300$ ms. This is the time period used in the above equation where the maximum allowed time for the UE to identify a new UTRA FDD cell is defined.

 $T_{Inter1} = 30$ ms. TTI insertion uncertainty = 2 ms

The overall delays measured shall be less than a total of 4802 ms in this test case (note: this gives a total of 4800 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

The rate of correct measurement reports observed with this delay during repeated tests shall be at least 90% with a confidence level of 95%.

8.5.3 E-UTRAN FDD - UTRAN FDD event triggered reporting when DRX is used under fading propagation conditions

Editor's note: This section is incomplete. The following aspects are either missing or not yet determined:

- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined

8.5.3.1 Test purpose

To verify the UE's ability to make a correct reporting of an event in DRX under fading propagation conditions within the E-UTRA FDD - UTRA FDD cell search requirements.

8.5.3.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward that support UTRA FDD.

8.5.3.3 Minimum conformance requirements

The measurement reporting delay shall be less than $T_{identify,\,UTRA_FDD}$ in RRC_CONNECTED state.

When explicit neighbour list is provided and DRX is used the UE shall be able to identify a new detectable cell belonging to the neighbour cell list within Tidentify, UTRA_FDD as in table 8.5.3.3-1.

Table 8.5.3.3-1: Requirements to identify a newly detectable UTRA FDD cell

DRX cycle length (s)		_{FDD} (s) (DRX les)	
	Gap period =	Gap period =	
	40 ms	80 ms	
≤0.04	Non DRX	Non DRX	
	Requirements	Requirements	
	in TS 36.133	in TS 36.133	
	[4] section	[4] section	
	8.1.2.4.1.1 are	8.1.2.4.1.1 are	
	applicable	applicable	
0.064	2.56* Nfreq	4.8* Nfreq (75*	
	(40* Nfreq)	Nfreq)	
0.08	3.2* Nfreq	4.8* Nfreq (60*	
	(40* Nfreq)	Nfreq)	
0.128	2.56* Nfreq	4.8* Nfreq	
	(20* Nfreq)	(37.5* Nfreq)	
0.16	3.2* Nfreq (20*	4.8* Nfreq (30*	
	Nfreq)	Nfreq)	
0.16 <drx-< td=""><td>Note (20*</td><td>Note</td></drx-<>	Note (20*	Note	
cycle≤2.56	Nfreq)	(20* Nfreq)	
Note: Time depends upon the DRX cycle in use			

A cell shall be considered detectable when

- CPICH Ec/Io \geq -20 dB,
- SCH_Ec/Io ≥ -17 dB for at least one channel tap and SCH_Ec/Ior is equally divided between primary synchronisation code and secondary synchronisation code. When L3 filtering is used an additional delay can be expected.

The UE shall be capable of performing RSCP and Ec/Io measurements of at least 6 UTRA cells per UTRA FDD carrier and the UE physical layer shall be capable of reporting RSCP and Ec/Io measurements to higher layers with the measurement period defined in table 8.5.3.3-2.

T_{measure_UTRA_FDD} (s) (DRX DRX cycle length (s) cycles) Gap period = Gap period = 40 ms 80 ms ≤0.04 Non DRX Non DRX Requirements Requirements in TS 36.133 in TS 36.133 [4] [4] section section 8.1.2.4.1.1 are 8.1.2.4.1.1 are applicable applicable 0.064 0.48* N_{freq} 0.8* N_{freq} (7.5* N_{freq}) (12.5* N_{freq}) 0. 8* N_{freq} (10* 0.08 0.48* N_{freq} (6* N_{freq}) N_{freq} 0.64* N_{freq} 0. 8* N_{freq} 0.128 $(5^* N_{freq})$ (6.25* N_{freq}) 0.128<DRX-Note (5* N_{freq}) Note (5* N_{freq}) cycle≤2.56 Note: Time depends upon the DRX cycle in use

Table 8.5.3.3-2: Requirements to measure UTRA FDD cells

The measurement accuracy for all measured cells shall be as specified in TS 36.133 [4] clause 9.1.

Reported measurements contained in event triggered measurement reports shall meet the requirements in TS 36.133 [4] clause 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between any events that will trigger a measurement report until the UE starts to transmit the measurement report over the Uu interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: twice the TTI of the uplink DCCH. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify\ UTRA_FDD}$ defined in TS 36.133 [4] clause 8.1.2.4.1.1.1. When L3 filtering is used an additional delay can be expected.

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.4.1.2 and A.8.5.3.

8.5.3.4 Test description

8.5.3.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and faders and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.23.
- 2. The general test parameter settings are set up according to Table 8.5.3.4.1-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 8.5.3.4.3.
- 5. There is one E-UTRA FDD serving cell and one UTRA FDD cell specified in the test. Cell 1 (E-UTRA FDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 8.5.3.4.1-1: General Test Parameters for E-UTRAN FDD- UTRAN FDD event triggered reporting when DRX is used under fading propagation conditions

Parameter	Unit	Test 1	Test 2	Comment
		Va	lue	
PDSCH parameters (E-		DL Reference Measurement		As specified in section A.1.1 Note that UE
UTRAN FDD)		Channel R.0 FDD		may only be allocated at On Duration
PCFICH/PDCCH/PHICH		DL Reference Me		As specified in section A.2.1.
parameters (E-UTRAN FDD)		Channel R.6 FDD)	
Gap Pattern Id		(As specified in 3GPP TS 36.133 [4] section 8.1.2.1.
Active cell		Ce		Cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		Ce	II 2	Cell 2 is on UTRA RF channel number 1.
CP length		Nor	mal	Applicable to cell 1
E-UTRA RF Channel Number		1	1	One E-UTRA FDD carrier frequency is used.
E-UTRA Channel Bandwidth (BW _{channel})	MHz	10		
UTRA RF Channel Number		1		One UTRA FDD carrier frequency is used.
Inter-RAT (UTRA FDD)		CPICH	ł Ec/lo	
measurement quantity				
b1-Threshold-UTRA	dB	-1	8	CPICH Ec/lo threshold for event B1.
Hysteresis	dB)	
TimeToTrigger	S)	
Filter coefficient		(L3 filtering is not used
PRACH configuration		4	1	As specified in table 5.7.1-2 in TS 36.211 [9]
Access Barring Information	-	Not	Sent	No additional delays in random access procedure.
DRX		ON		DRX related parameters are defined in Table 8.5.3.5-2
Monitored UTRA FDD cell		1	2	UTRA cells on UTRA RF channel 1
list size				provided in the cell list.
T1	s		5	
T2	S	6	30	

8.5.3.4.2 Test procedure

The test consists of one active cell and one neighbour cell. In the measurement control information it is indicated to the UE that event-triggered reporting with Event B1 is used. The test consists of two successive time periods, with time durations of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

In Test 1 when DRX = 40 ms is used, UE needs to be provided at least once every 500 ms with new Timing Advance Command MAC control element to restart the Timer Alignment Timer to keep the UE uplink time alignment. Furthermore, the UE is allocated with PUSCH resource at every DRX cycle. In Test 2 when DRX = 1280 ms is used, the uplink time alignment is not maintained and the UE needs to use RACH to obtain uplink allocation for measurement reporting.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 8.5.3.5-1, 8.5.3.5-2, 8.5.3.5-3 and 8.5.3.5-5. Propagation conditions are set according to Annex B clauses B.1.1 and B.2.2. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table's 8.5.3.5-1 and 8.5.3.5-4. T2 starts.
- 6. UE shall transmit a MeasurementReport message triggered by Event B1. If the overall delays measured from the beginning of time period T2 is less than 2442 ms for Test 1 or less than 26882 ms for Test 2 then the number of

- successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.
- 7. After the SS receive the MeasurementReport message in step 6) or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. The SS shall set Cell 2 primary scrambling code = ((current cell 2 primary scrambling code 50) mod 200 + 100) for next iteration of the test procedure loop.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A, or
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.
- 11. Repeat step 1-10 for each sub-test in Table 8.3.2.4.1-1 as appropriate.

8.5.3.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.5.3.4.3-1: Common Exception messages for E-UTRAN FDD - UTRAN FDD event triggered reporting when DRX is used under fading propagation conditions

Default Message Contents		
Common contents of system information		
blocks exceptions		
Default RRC messages and information	Table H.3.1-7	
elements contents exceptions	Table H.3.7-1	
	Table H.3.7-2	
	Table H.3.7-3	

Table 8.5.3.4.3-2: RRCConnectionReconfiguration: Additional E-UTRAN FDD - UTRAN FDD event triggered reporting when DRX is used under fading propagation conditions

Derivation Path: TS 36.508 [7] clause 4.6.1, Table 4.6.1-8 RRCConnectionReconfiguration				
Information Element	Value/remark	Comment	Condition	
RRCConnectionReconfiguration ::= SEQUENCE {				
rrc-TransactionIdentifier	RRC-			
	TransactionIdentifier-DL			
criticalExtensions CHOICE {				
c1 CHOICE{				
rrcConnectionReconfiguration-r8 SEQUENCE {				
measConfig	MeasConfig -DEFAULT			
radioResourceConfigDedicated	RadioResourceConfigDed			
	icated-HO			
}				
}				
}				
}				
		·		

Table 8.5.3.4.3-3: *MeasConfig-DEFAULT*: Additional E-UTRAN FDD - UTRAN FDD event triggered reporting when DRX is used under fading propagation conditions

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-1 MeasConfig-DEFAULT:			
Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModList SEQUENCE (SIZE	2 entry		
(1maxObjectId)) OF SEQUENCE {			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f1		
measObject CHOICE {			
measObject EUTRA	MeasObjectEUTRA- GENERIC(f1)	E-UTRA Cell	
}			
}			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f8		
measObject CHOICE {			
measObjectUTRA	MeasObjectUTRA- GENERIC(f8)	UTRA Cell	
}			
}			
}			
reportConfigToRemoveList	Not present		
reportConfigToAddModList SEQUENCE (SIZE	1 entry		
(1maxReportConfigId))OF SEQUENCE {			
reportConfigId	idReportConfig-B1		
reportConfig	ReportConfigInterRAT- B1-UTRA		
}			
measIdToRemoveList	Not present		
measIdToAddModList SEQUENCE (SIZE (1maxMeasId)) of SEQUENCE {	1 entry		
measld	1		
measObjectId	IdMeasObject-f8		
reportConfigId	idReportConfig-B1		
}			
quantityConfig	QuantityConfig- DEFAULT		UTRAN
measGapConfig	MeasGapConfig-GP1		
s-Measure	Not present		
preRegistrationInfoHRPD	Not present		
speedStatePars	Not present		
}			

Table 8.5.3.4.3-4: ReportConfigInterRAT-B1-UTRA: Additional E-UTRAN FDD - UTRAN FDD event triggered reporting when DRX is used under fading propagation conditions

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-7B ReportConfigInterRAT-B1(EUTRA-Thres)			
Information Element	Value/remark	Comment	Condition
ReportConfigInterRAT-B1-UTRA(UTRA-Thres) ::=			
SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventB1 SEQUENCE {			
b1-Threshold CHOICE {			
b1-ThresholdUTRA CHOICE {			
utra-EcN0	13 (-18 dB)	-18 dB is actual EcNO value in dB ((13 - 49)/2 dB)	
}			
}			
}			
}			
hysteresis	0(0 dB)		
}			
}			
}			

Table 8.5.3.4.3-5: SchedulingRequest-Config-DEFAULT: Additional E-UTRAN FDD event triggered reporting when DRX is used under fading propagation conditions

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-20 SchedulingRequest-Config-DEFAULT			
Information Element	Value/remark	Comment	Condition
SchedulingRequest-Config-DEFAULT ::= CHOICE {			
setup SEQUENCE {			
sr-PUCCH-ResourceIndex	41	10 MHz channel bandwidth parameter	
sr-ConfigIndex	0		
dsr-TransMax	n4		
}			
}			

Table 8.5.3.4.3-6: *MeasResults*: Additional E-UTRAN FDD - UTRAN FDD event triggered reporting when DRX is used under fading propagation conditions

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListUTRA	MeasResultListUTRA		
}			

Table 8.5.3.4.3-7: *MeasResultListUTRA*: Additional E-UTRAN FDD - UTRAN FDD event triggered reporting when DRX is used under fading propagation conditions

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId CHOICE {			
fdd	250	PhysCellIdUTRA- FDD	
}			
measResult SEQUENCE {			
utra-EcN0		Set according to specific test	
}			
}			

8.5.3.5 Test requirement

Tables 8.5.3.4.1-1, 8.5.3.5-1 and 8.5.3.5-4 define the primary level settings including test tolerances for E-UTRAN FDD - UTRAN FDD event triggered reporting under fading propagation conditions in synchronous cells test.

Table 8.5.3.5-1: Cell Specific Test requirement Parameters for Cell 1 E-UTRAN FDD event triggered reporting when DRX is used under fading propagation conditions

Parameter	Unit	Cell 1			
		T1	T2		
E-UTRA RF Channel Number		1			
BW _{channel}	MHz	10			
OCNG Pattern defined in		OP.1 FDD			
D.1.1 (OP.1 FDD)					
PBCH_RA	dB				
PBCH_RB	dB				
PSS_RA	dB				
SSS_RA	dB				
PCFICH_RB	dB				
PHICH_RA	dB				
PHICH_RB	dB	1			
PDCCH_RA	dB	0			
PDCCH_RB	dB				
PDSCH_RA	dB				
PDSCH_RB	dB				
OCNG_RA ^{Note 1}	dB				
OCNG_RB ^{Note 1}	dB				
\hat{E}_{s}/I_{ot}	dB	4 + TT	4 + TT		
$N_{oc}^{ m Note 2}$	dBm/15 kHz	-98			
RSRP Note 3	dBm/15 kHz	-94 + TT	-94 + TT		
SCH_RP	dBm/15 kHz	-94 + TT	-94 + TT		
\hat{E}_s/N_{oc}	dB	4 + TT	4 + TT		
Propagation Condition		ETU	70		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.5.3.5-2: DRX-Configuration to be used in E-UTRAN FDD-FDD inter-frequency event triggered reporting when DRX is used in fading propagation conditions

Field	Test1 Value	Test2 Value	Comment		
onDurationTimer	psf1	psf1			
drx-InactivityTimer	psf1	psf1			
drx-RetransmissionTimer	sf1	sf1			
longDRX-CycleStartOffset	sf40	sf1280			
shortDRX	disable	disable			
Note: For further information see section 6.3.2 in 3GPP TS 36.331 [5].					

Table 8.5.3.5-3: *TimeAlignmentTimer* and *sr-ConfigIndex*-Configuration to be used in E-UTRAN FDD-FDD inter-frequency event triggered reporting when DRX is used in fading propagation conditions

Field	Test1	Test2	Comment
rield	Value	Value	
TimeAlignmentTimer	sf500	sf500	For further information see section 6.3.2 in 3GPP TS 36.331 [5].
sr-ConfigIndex	0	0	For further information see section 6.3.2 in 3GPP TS 36.331 and section10.1 in 3GPP TS 36.213 [8].

Table 8.5.3.5-4: Cell Specific Test requirement Parameters for Cell 2 UTRAN FDD event triggered reporting when DRX is used under fading propagation conditions

Parameter	Unit	Cell 2	
		T1 T2	
UTRA RF Channel Number		1	
CPICH_Ec/lor	dB	-10	
PCCPCH_Ec/lor	dB	-12	
SCH_Ec/lor	dB	-12	
PICH_Ec/lor	dB	-15	
DPCH_Ec/lor	dB	N/A	
OCNS		-0.941	
\hat{I}_{or}/I_{oc}	dB	-Infinity	-1.8 + TT
I_{oc}	dBm/3.84 MHz	-70	
CPICH_Ec/lo	dB	-Infinity -14 + TT	
Propagation Condition		Case 5 (Note 3)	

Note 1: The DPCH level is controlled by the power control loop.

Note 2: The power of the OCNS channel that is added shall make the total power from the cell to be equal

to l_{or}.

Note 3: Case 5 propagation conditions are defined in Annex A of 3GPP TS 25.101.

In Test 1 when DRX cycle length = 40 ms is used, the overall delay measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event B1 triggered measurement report to Cell 2 on PUSCH.

In Test 2 when DRX cycle length = 1280 ms is used, the overall delay measured is defined as the time from the beginning of time period T2, to the moment the UE starts to send preambles on the PRACH for Scheduling Request (SR) to obtain allocation to send the measurement report to Cell 2 on PUSCH.

For both tests:

The overall delays measured when DRX cycle length is 40 ms in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

NOTE 1: The actual overall delays measured in the test may be up to one DRX cycle higher than the measurement reporting delays above because UE is allowed to delay the initiation of the measurement reporting procedure to the next until the Active Time.

NOTE 2: In order to calculate the rate of correct events the system simulator shall verify that it has received correct Event B1 measurement report.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The overall delay measured when DRX cycle length is 40 ms test requirement is expressed as:

Overall delay measured = measurement reporting delay + TTI insertion uncertainty + DRX cycle length

Measurement reporting delay = $T_{identify, UTRA FDD}$ =

$$T_{\text{identify, UTRA_FDD}} = T_{\text{basic_identify_UTRA_FDD}} \cdot \frac{480}{T_{\text{inter1}}} \cdot N_{\textit{Freq}} \quad \textit{ms}$$

Where:

 $T_{basic_identify_UTRA_FDD} = 300$ ms. It is the time period used in the inter RAT equation where the maximum allowed time for the UE to identify a new UTRA FDD cell is defined.

 $T_{Inter1} = 60 \text{ ms}.$

 $N_{freq} = 1$. It is defined in TS 36.133 [4] clause 8.1.2.1.1.

TTI insertion uncertainty = 2 ms

DRX cycle length = 40 ms

The overall delay measured when DRX cycle length is 40 ms shall be less than a total of 2442 ms.

The overall delay measured when DRX cycle length is 1280 ms test requirement is expressed as:

Overall delay measured = measurement reporting delay + TTI insertion uncertainty + DRX cycle length

Measurement reporting delay = $T_{identify_UTRA_FDD}$

 $T_{identify\ UTRA\ FDD} = 25600\ ms$. When DRX cycle length is 1280 ms the $T_{identify\ UTRA\ FDD}$ is 20 x 1280 ms.

TTI insertion uncertainty = 2 ms

DRX cycle length = 1280 ms

The overall delay measured when DRX cycle length is 1280 ms shall be less than a total of 26882 ms.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

8.6 E-UTRAN TDD - UTRAN FDD measurements

8.6.1 E-UTRAN TDD - UTRAN FDD event triggered reporting under fading propagation conditions

8.6.1.1 Test purpose

To verify the UE's ability to make a correct reporting of an event under fading propagation conditions within the E-UTRA TDD - UTRA FDD cell search requirements.

8.6.1.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward that support UTRA FDD.

8.6.1.3 Minimum conformance requirements

The measurement reporting delay shall be less than $T_{identify,\, UTRA_FDD}$ in RRC_CONNECTED state.

When explicit neighbour list is provided and no DRX is used the UE shall be able to identify a new detectable cell belonging to the monitored set within

$$T_{\text{identify, UTRA_FDD}} = T_{\text{basic_identify_UTRA_FDD}} \cdot \frac{480}{T_{\text{interl}}} \cdot N_{\text{Freq}} \quad ms$$

Where:

 $T_{basic_identify_UTRA_FDD} = 300$ ms. This is the time period used in the inter-RAT equation where the maximum allowed time for the UE to identify a new UTRA FDD cell is defined.

 $T_{Inter1} = 30$ ms. This is the minimum available time for inter-RAT measurement during 480 ms period

N_{Freq}: This is the number of UTRA carriers being monitored

A cell shall be considered detectable when

- CPICH Ec/Io \geq -20 dB,
- SCH_Ec/Io ≥ -17 dB for at least one channel tap and SCH_Ec/Ior is equally divided between primary synchronisation code and secondary synchronisation code. When L3 filtering is used an additional delay can be expected.

When measurement gaps are scheduled for UTRA FDD inter RAT measurement the UE physical layer shall be capable of reporting measurements to higher layers with measurement accuracy as specified in TS 36.133 [4] clause 9.2 of with measurement period given by

$$T_{\text{measurement_UTRA_FDD}} = Max \left\{ T_{\text{Measurement_Period UTRA_FDD}}, T_{\text{basic_measurement_UTRA_FDD}} \cdot \frac{480}{T_{\text{interl}}} \cdot N_{\text{Freq}} \right\} ms$$

Where:

 $X_{\text{basic measurement UTRA FDD}} = 6 \text{ (cells)}$

 $T_{\text{Measurement Period UTRA FDD}} = 480 \text{ ms.}$ The period used for calculating the measurement period.

 $T_{basic_measurement_UTRA_FDD} = 50$ ms. This is the time period used in the equation where the maximum allowed time for the UE to identify a new UTRA FDD cell is defined.

 $T_{Inter1} = 30$ ms. This is the minimum available time for inter-RAT measurement during 480 ms period

N_{Freq}: This is the number of UTRA carriers being monitored

If the UE does not need measurement gaps to perform UTRA FDD measurements, the measurement period for UTRA FDD measurements is 480 ms.

The UE shall be capable of performing UTRA FDD CPICH measurements for $X_{\text{basic measurement UTRA_FDD}}$ inter-frequency cells per FDD frequency and the UE physical layer shall be capable of reporting measurements to higher layers with the measurement period of $T_{\text{Measurement UTRA FDD}}$.

Reported measurements contained in event triggered measurement reports shall meet the requirements in TS 36.133 [4] clause 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between any events that will trigger a measurement report until the UE starts to transmit the measurement report over the Uu interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty

is: twice the TTI of the uplink DCCH. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify\ UTRA_FDD}$ defined in TS 36.133 [4] clause 8.1.2.4.1.1.1. When L3 filtering is used an additional delay can be expected.

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.4.2 and A.8.6.1.

8.6.1.4 Test description

8.6.1.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and faders and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.23.
- 2. The general test parameter settings are set up according to Table 8.6.1.4.1-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 8.6.1.4.3.
- 5. There is one E-UTRA TDD serving cell and one UTRA FDD cell specified in the test. Cell 1 (E-UTRA TDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 8.6.1.4.1-1: General test parameters for E-UTRAN TDD-UTRAN FDD event triggered reporting in fading propagation conditions

Parameter	Unit	Value	Comment
PDSCH parameters (E-UTRAN TDD)		DL Reference Measurement	As specified in section
,		Channel R.0 TDD	A.1.2.
PCFICH/PDCCH/PHICH parameters		DL Reference Measurement	As specified in section
(E-UTRAN TDD)		Channel R.6 TDD	A.2.2.
Gap Pattern Id		1	As specified in 3GPP
			TS 36.133 section
			8.1.2.1.
Active cell		Cell 1	Cell 1 is on E-UTRA RF
			channel number 1.
Neighbour cell		Cell 2	Cell 2 is on UTRA RF
			channel number 1.
Special subframe configuration		6	As specified in table
			4.2-1 in 3GPP TS
			36.211. Applicable to
			cell 1.
Uplink-downlink configuration		1	As specified in table
			4.2-2 in 3GPP TS
			36.211. Applicable to
			cell 1.
CP length		Normal	Applicable to cell 1.
E-UTRA RF Channel Number		1	One E-UTRA TDD
			carrier frequency is
			used.
E-UTRA Channel Bandwidth (BW _{channel})	MHz	10	
UTRA RF Channel Number		1	One UTRA FDD carrier
			frequency is used.
Inter-RAT (UTRA FDD) measurement		CPICH Ec/lo	
quantity			
b1-Threshold-UTRA	dB	-18	CPICH Ec/Io threshold
			for event B1.
Hysteresis	dB	0	
Time To Trigger	ms	0	
Filter coefficient		0	L3 filtering is not used.
DRX		OFF	
Monitored UTRA cell list size		12	UTRA cells on UTRA
			RF channel 1 provided
			in the cell list.
T1	S	5	
T2	S	6	

8.6.1.4.2 Test procedure

The test consists of one active cell and one neighbour cell. In the measurement control information it is indicated to the UE that event-triggered reporting with Event B1 is used. The test consists of two successive time periods, with time durations of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table's 8.6.1.5-1 and 8.6.1.5-2. Propagation conditions are set according to Annex B clause B.1.1 and B.2.2.. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table's 8.6.1.5-1 and 8.6.1.5-2.
- 6. UE shall transmit a MeasurementReport message triggered by Event B1. If the overall delays measured from the beginning of time period T2 is less than 4802 ms then the number of successful tests is increased by one. If the

427

UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

- 7. After the SS receive the MeasurementReport message in step 6) or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. The SS shall set Cell 2 primary scrambling code = ((current cell 2 primary scrambling code 50) mod 200 + 100) for the next iteration of the test procedure loop.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A,
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

8.6.1.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.6.1.4.3-1: Common Exception messages for E-UTRAN TDD - UTRAN FDD event triggered reporting under fading propagation conditions

Default Message Contents				
Common contents of system information				
blocks exceptions				
Default RRC messages and information	Table H.3.1-1			
elements contents exceptions	Table H.3.1-4			
·	Table H.3.1-7			

Table 8.6.1.4.3-3: ReportConfigInterRAT-B1-UTRA: Additional E-UTRAN TDD - UTRAN FDD event triggered reporting under fading propagation conditions

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
ReportConfigInterRAT-B1-UTRA(UTRA-Thres) ::=			
SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventB1 SEQUENCE {			
b1-Threshold CHOICE {			
b1-ThresholdUTRA CHOICE {			
tutra-EcN0	13 (-18dB)	The actual value is	
		(IE value - 49)/2 dB	
}			
}			
}			
}	0 (0dB)		
hysteresis			
}			
}			

Table 8.6.1.4.3-4: *MeasResults*: Additional E-UTRAN TDD - UTRAN FDD event triggered reporting under fading propagation conditions

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1		
measResultServiCCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListUTRA	MeasResultListUTRA		
}			
}			

Table 8.6.1.4.3-5: *MeasResultListUTRA*: Additional E-UTRAN TDD - UTRAN FDD event triggered reporting under fading propagation conditions

Information Element	Value/remark	Comment	Condition
MeasResultListUTRA ::= SEQUENCE (SIZE			
1maxCellReport)) OF SEQUENCE {			
physCellId CHOICE {			
fdd	UTRA-FDD-CellIdentity		
}	-		
measResult SEQUENCE {			
cpich-EcN0		Set according to	
		specific test	
}			
}			

8.6.1.5 Test requirement

Tables 8.6.1.4.1-1, 8.6.1.5-1 and 8.6.1.5-2 define the primary level settings including test tolerances for E-UTRAN TDD - UTRAN FDD event triggered reporting under fading propagation conditions in synchronous cells test.

Table 8.6.1.5-1: Cell specific test parameters for E-UTRAN TDD (cell # 1) for event triggered reporting of UTRAN FDD cell under fading propagation conditions

Parameter	Unit	Cell 1		
		T1	T2	
E-UTRA RF Channel Number		1		
BW _{channel}	MHz	10		
OCNG Pattern defined in D.2.1		OP.1 TDD		
(OP.1 TDD)				
PBCH_RA	dB			
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB	0		
PDCCH_RA	dB	0		
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA ^{Note 1}	dB			
Note 1				
OCNG_RB ^{Note 1}	dB			

\hat{E}_{s}/I_{ot}	dB	4	4	
\hat{E}_s/N_{oc}	dB	4	4	
N_{oc}	dBm/15 kHz	-98		
RSRP	dBm/15 kHz	-94	-94	
SCH_RP	dBm/15 kHz	-94	-94	
Propagation Condition		ETU70		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Table 8.6.1.5-2: Cell specific test parameters for UTRAN FDD (cell # 2) for event triggered reporting of UTRAN FDD cell under fading propagation conditions

Parameter	Unit	Cell 2		
		T1	T2	
UTRA RF Channel		1		
Number		•		
CPICH_Ec/lor	dB	-10		
PCCPCH_Ec/lor	dB	-12		
SCH_Ec/lor	dB	-12		
PICH_Ec/lor	dB	-15		
DPCH_Ec/lor	dB	N/A		
OCNS		-0.94	11	
\hat{I}_{or}/I_{oc}	dB	-Infinity	-1.8	
I_{oc}	dBm/3.84 MHz	-70		
CPICH_Ec/lo	dB	-Infinity	-14	
Propagation Condition		Case 5 (Note 3)		

Note 1: The DPCH level is controlled by the power control loop.

Note 2: The power of the OCNS channel that is added shall make the total power from the cell to be equal to I_{or}.

Note 3: Case 5 propagation conditions are defined in Annex A of 3GPP TS 25.101.

The overall delays measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event B1 triggered measurement report to Cell 2.

The overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify, UTRA_FDD}$

$$T_{\text{identify, UTRA_FDD}} = T_{\text{basic_identify_UTRA_FDD}} \cdot \frac{480}{T_{\text{interl}}} \cdot N_{\text{Freq}} \quad ms$$

 $T_{basic_identify_UTRA_FDD} = 300 \text{ ms}$

 $T_{Inter1} = 30 \text{ ms}$

 $N_{Freq} = 1$

TTI insertion uncertainty = 2 ms

The overall delays measured shall be less than a total of 4802 ms in this test case (note: this gives a total of 4800 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

8.7 E-UTRAN TDD - UTRAN measurements

8.7.1 E-UTRAN TDD - UTRAN TDD event triggered reporting under fading propagation conditions

Editor's note: This section is incomplete. The following aspects are either missing or not yet determined:

- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined
- It only includes 1.28 Mcps TDD option related requirements

8.7.1.1 Test purpose

To verify the UE's ability to make a correct reporting of an event under fading propagation conditions within the E-UTRA TDD - UTRA TDD cell search requirements.

8.7.1.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward that support UTRA TDD.

8.7.1.3 Minimum conformance requirements

The measurement reporting delay shall be less than $T_{identify,\,UTRA_TDD}$ in RRC_CONNECTED state.

When explicit neighbour list is provided and no DRX is used the UE shall be able to identify a new detectable cell belonging to the monitored set within

$$T_{\text{identify, UTRA_TDD}} = Max \left\{ 5000, T_{\text{basic identify UTRA_TDD}} \cdot \frac{480}{T_{\text{inter1}}} \cdot N_{Freq} \right\} ms$$

If the UE does not require transmit gap to perform inter-RAT UTRA TDD measurements, the UE shall be able to identify a new detectable inter-RAT UTRA TDD cell belonging to the monitored set within 5000 ms.

A cell shall be considered detectable when

- P-CCPCH Ec/Io \geq -8 dB,
- DwPCH_Ec/Io \geq -5 dB.

When L3 filtering is used an additional delay can be expected.

When measurement gaps are scheduled for UTRA TDD inter RAT measurements the UE physical layer shall be capable of reporting measurements to higher layers with measurement accuracy as specified in TS 36.133 [4] clause 9.3 with measurement period given by

$$T_{\text{measurement UTRA_TDD}} = Max \left\{ T_{\text{Measurement_Period UTRA_TDD}}, T_{\text{basic measurement UTRA_TDD}}, \frac{480}{T_{\text{inter1}}} \cdot N_{\text{Freq}} \right\} ms$$

If the UE does not need measurement gaps to perform UTRA TDD measurements, the measurement period for UTRA TDD measurements is 480 ms.

The UE shall be capable of performing UTRA TDD P-CCPCH RSCP measurements for $X_{basic\ measurementUTRA_TDD}$ interfrequency cells per TDD frequency of the monitored set and the UE physical layer shall be capable of reporting measurements to higher layers with the measurement period of $T_{Measurement\ UTRA\ TDD}$.

$$X_{\text{basic measurementUTRA_TDD}} = 6$$

 $T_{\text{Measurement_Period UTRA_TDD}} = 480 \text{ ms}$ is the period used for calculating the measurement period $T_{\text{measurement_UTRA_TDD}}$ for UTRA TDD P-CCPCH RSCP measurements.

 $T_{basic_identify_UTRA_TDD} = 800$ ms is the time period used in the inter RAT equation where the maximum allowed time for the UE to identify a new UTRA TDD cell is defined.

 $T_{basic_measurement_UTRA_TDD} = 50$ ms is the time period used in the equation for defining the measurement period for inter RAT P-CCPCH RSCP measurements.

 N_{freq} and T_{inter1} are defined in TS 36.133 [4] section 8.1.2.1.1

Reported measurements in periodically triggered measurement reports shall meet the requirements in TS 36.133 [4] section 9.

Reported measurements in event triggered measurement reports shall meet the requirements in TS 36.133 [4] section 9.

The UE shall not send any event triggered measurement reports, as long as the reporting criteria is not fulfilled.

The measurement reporting delay is defined as the time between any event that will trigger a measurement report until the UE starts to transmit the measurement report over the Uu interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is twice the TTI of the uplink DCCH. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify, \, UTRA_TDD}$ defined in TS 36.133 [4] Section 8.1.2.4.3.1.1 When L3 filtering is used an additional delay can be expected.

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements in TS 36.133 [4] section 9.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in TS 36.133 [4] section 8.1.2.4.3.1.4 Event Triggered Reporting.

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.4.3 and A.8.7.1.

8.7.1.4 Test description

8.7.1.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and faders and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.23.
- 2. The general test parameter settings are set up according to Table 8.7.1.4.1-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 8.7.1.4.3.
- 5. There is one E-UTRA TDD serving cell and one UTRA TDD cell specified in the test. Cell 1 (E-UTRA TDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 8.7.1.4.1-1: General test parameters for E-UTRA TDD to UTRA(1.28 Mcps TDD OPTION) cell search in fading propagation conditions

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference Measurement Channel R.0 TDD	As specified in section A.1.2
PCFICH/PDCCH/PHICH parameters		DL Reference Measurement Channel R.6 TDD	As specified in section A.2.2
Active cell		Cell 1	E-UTRA TDD cell
Neighbour cell		Cell 2	UTRA 1.28Mcps TDD Cell
Gap Pattern Id		0	As specified in 3GPP TS 36.133 section 8.1.2.1.
Uplink-downlink configuration of cell 1		1	As specified in table 4.2.2 in TS 36.211
Special subframe configuration of cell 1		6	As specified in table 4.2.1 in TS 36.211
CP length of cell 1		normal	
Hysteresis	dB	0	
TimeToTrigger	dB	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	
Time offset between cells	ms	3	Asynchronous cells 3ms or 92160*Ts
Ofn	dB	0	
Thresh	dBm	-87	
T1	S	5	
T2	S	10	

8.7.1.4.2 Test procedure

The test consists of one active cell and one neighbour cell. In the measurement control information it is indicated to the UE that event-triggered reporting with Event B1 is used. The test consists of two successive time periods, with time durations of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table's 8.7.1.5-1 and 8.7.1.5-2. Propagation conditions are set according to Annex B clause B.1.1 and B.2.2. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table's 8.7.1.5-1 and 8.7.1.5-2.
- 6. UE shall transmit a MeasurementReport message triggered by Event B1. If the overall delay measured from the beginning of time period T2 is less than 6402 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.
- 7. After the SS receive the MeasurementReport message in step 6) or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. SS shall change to set cell 2 cell parameter id =(current cell 2 cell parameter id +4) mod 16.
- 9. After the RRC connection release, the SS transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE, or switches off the UE.
- 10. Repeat step 1-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

8.7.1.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.7.1.4.3-1: Common Exception messages for E-UTRAN TDD - UTRAN TDD event triggered reporting under fading propagation conditions

Default Message Contents		
Common contents of system information		
blocks exceptions		
Default RRC messages and information	Table H.3.1-1	
elements contents exceptions	Table H.3.1-7	

Table 8.7.1.4.3-2: *MeasConfig-DEFAULT*: Additional E-UTRAN TDD - UTRAN TDD event triggered reporting under fading propagation conditions

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4	.6.6-1 MeasConfig-DEFAULT	<u></u> Г:	
Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModList SEQUENCE (SIZE	2 entry		
(1maxObjectId)) OF SEQUENCE {			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f1		
measObject CHOICE {	,		
measÓbject EUTRA	MeasObjectEUTRA- GENERIC(f1)	E-UTRA Cell	
}			
}			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f9		
measObject CHOICE {			
measObjectUTRA	MeasObjectUTRA- GENERIC(f9)	UTRA Cell	
}			
}			
}			
reportConfigToRemoveList	Not present		
reportConfigToAddModList SEQUENCE (SIZE (1maxReportConfigId))OF SEQUENCE {	1 entry		
reportConfigId	idReportConfig-B1		
reportConfig	ReportConfigInterRAT- B1-UTRA		
}			
measIdToRemoveList	Not present		
measIdToAddModList SEQUENCE (SIZE (1maxMeasId)) of SEQUENCE {	1 entry		
measld	1		
measObjectId	IdMeasObject-f9		
reportConfigld	idReportConfig-B1		
}			
quantityConfig	QuantityConfig- DEFAULT		
measGapConfig	MeasGapConfig-GP1		
s-Measure	Not present		
preRegistrationInfoHRPD	Not present		
speedStatePars	Not present		
}	1		
•	<u> </u>	<u> </u>	1

Table 8.7.1.4.3-3: ReportConfigInterRAT-B1-UTRA: Additional E-UTRAN TDD - UTRAN TDD event triggered reporting under fading propagation conditions

Derivation Path: 36.508 clause 4.6.6 Table 4.6.6-7B			
Information Element	Value/remark	Comment	Condition
ReportConfigInterRAT-B1-UTRA(UTRA-Thres) ::=			
SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventB1 SEQUENCE {			
b1-Threshold CHOICE {			
b1-ThresholdUTRA CHOICE {			
utra-RSCP	28	UTRA-Thres is actual RSCP value in dBm UTRA-Thres + 115	UTRA-TDD
}			
}			
}			
}			
hysteresis	0 (0dB)	The actual value is IE value * 0.5 dB.	
timeToTrigger	ms0		
}			
}			
}			

Table 8.7.1.4.3-4: *MeasResults*: Additional E-UTRAN TDD - UTRAN TDD event triggered reporting under fading propagation conditions

Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1		
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListUTRA	MeasResultListUTRA		
}			

Table 8.7.1.4.3-5: *MeasResultListUTRA*: Additional E-UTRAN TDD - UTRAN TDD event triggered reporting under fading propagation conditions

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE { physCellId CHOICE {			
tdd	PhysCellIdUTRA-TDD	INTEGER (0127)	
}			
measResult SEQUENCE {			
utra-RSCP		Set according to specific test INTEGER (-591)	
}			
}			

8.7.1.5 Test requirement

Tables 8.7.1.4.1-1, 8.7.1.5-1 and 8.7.1.5-2 define the primary level settings including test tolerances for E-UTRAN TDD - UTRAN TDD event triggered reporting under fading propagation conditions in synchronous cells test.

Table 8.7.1.5-1: Cell specific test parameters for cell search E-UTRA TDD to UTRA TDD test case (cell 1)

Parameter	Unit Cell 1		II 1
		T1	T2
E-UTRA RF Channel		1	
Number			
BW _{channel}	MHz	1	-
OCNG Pattern defined in		OP.1	TDD
D.2.1 (OP.1 TDD)			
PBCH_RA	dB		
PBCH_RB	dB		
PSS_RB	dB		
SSS_RB	dB		
PCFICH_PA	dB		
PHICH_PA	dB		
PHICH_PB	dB	0	0
PDCCH_PA	dB		0
PDCCH_PB	dB		
PDSCH_PA	dB		
PDSCH_PB	dB		
OCNG_RA ^{Note1}	dB		
OCNG_RB ^{Note1}	dB		
\hat{E}_{s}/I_{ot}	dB	9	9
\hat{E}_s/N_{oc}	dB	9	9
N_{oc}	dBm/15kHz	-9	8
RSRP	dBm/15kHz	-89	-89
SCH_RP	dBm/15kHz	-89	-89
Propagation Condition		ETU	J 70

Note 1: OCNG shall be used such that cell is fully allocated and a constant total transmitted power spectral density is achieved

for all OFDM symbols.

Note 2: The resources for uplink transmission are assigned to the UE

prior to the start of time period T2.

Table 8.7.1.5-2: Cell specific test parameters for cell search E-UTRA TDD to UTRA TDD test case (cell 2)

Par	rameter	Unit		Cell 2 (UTRA)	
Timeslot I	Number		0		DwF	PTS
			T1	T2	T1	T2
UTRA RF Number ^N	Channel		Channel 2			
PCCPCH	_Ec/lor	dB	-3	-3		
DwPCH_	Ec/lor	dB			0	0
OCNS_E	c/lor ^{NOTE2}	dB	-3	-3		
\hat{I}_{or}/I_{oc}		dB	-inf	5	-inf	5
I_{oc}		dBm/1.28 MHz		-8	0	
PCCPCH	RSCP	dBm	-inf	-78	n.a.	n.a.
Propagati	ion Condition			Case 3	3 ^{NOTE3}	
Note 1: In the case of multi-frequency cell, the UTRA RF Channel Number is the primary frequency's channel number. Note 2: The power of the OCNS channel that is added shall make						
Note 3:	the total power from the cell to be equal to $I_{\rm or}$.			B of		

The overall delays measured is defined as the time from the beginning of time period T2, to the moment the UE send one [Event B1] triggered measurement report to Cell 2.

The overall delays measured in the test may be up to 2xTTI_{DCCH} higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify, UTRA TDD}$

$$T_{\text{identify, UTRA_TDD}} = Max \left\{ 5000, T_{\text{basic identify UTRA_TDD}} \cdot \frac{480}{T_{\text{interl}}} \cdot N_{Freq} \right\} ms$$

 $T_{basic_identify_UTRA_TDD} = 800 \ ms$

 $T_{Inter1} = 60 \text{ ms}$

 $N_{Freq} = 1$

TTI insertion uncertainty = 2 ms

The overall delays measured shall be less than a total of [6402 ms] in this test case (note: this gives a total of 6400 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

8.7.2 E-UTRAN TDD - UTRAN TDD cell search when DRX is used under fading propagation conditions

Editor's note: This section is incomplete. The following aspects are either missing or not yet determined:

- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined
- It only includes 1.28 Mcps TDD option related requirements

8.7.2.1 Test purpose

The test cases are to verify that the UE makes correct reporting of an event in DRX. These tests will partly verify E-UTRA TDD to UTRA TDD cell search requirements when DRX is used in TS 36.133 [4] section 8.1.2.4.3.2.

8.7.2.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward that support UTRA TDD.

8.7.2.3 Minimum conformance requirements

When explicit neighbour list is provided and DRX is used the UE shall be able to identify a new detectable cell belonging to the neighbour cell list within $T_{identify_UTRA_TDD}$ as shown in table 8.7.2.3-1

Table 8.7.2.3-1: Requirement to identify a newly detectable UTRA TDD cell

DRX cycle length (s)	T _{identify_UTRA_TDD} (s) (DRX cycles)		
length (s)	Gap period = 40 ms	Gap period = 80 ms	
≤0.32	Non DRX	Non DRX	
	Requirements	Requirements	
	in TS	in TS	
	36.133[4]	36.133[4]	
	section	section	
	8.1.2.4.3.1	8.1.2.4.3.1	
	are applicable	are applicable	
0.64≤DRX-	Note (20*	Note	
cycle≤2.56	Nfreq)	(20* Nfreq)	
Note: Time	e depends upon the DRX cycle in		
use			

A cell shall be considered detectable provided following conditions are fulfilled: A cell shall be considered detectable when

- P-CCPCH Ec/Io \geq -8 dB,
- DwPCH_Ec/Io \geq -5 dB.

When L3 filtering is used an additional delay can be expected.

The UE shall be capable of performing UTRA TDD P-CCPCH RSCP measurements of at least 6 UTRA cells per UTRA TDD carrier and the UE physical layer shall be capable of reporting measurements to higher layers with the measurement period defined in table 8.7.2.3-2.

Table 8.7.2.3-2: Requirement to measure UTRA TDD cells

DRX cycle length (s)	T _{measure_UTRA_TDD} (s) (DRX cycles)		
	Gap period = 40 ms	Gap period = 80 ms	
≤0.04	Non DRX Requirements in TS 36.133[4] section 8.1.2.4.3.1 are applicable	Non DRX Requirements in TS 36.133[4] section 8.1.2.4.3.1 are applicable	
0.064	0.48*N _{freq} (7.5*N _{freq})	$0.8*N_{freq}$ (12.5* N_{freq})	
0.08	0.48*N _{freq} (6*N _{freq})	0. 8*N _{freq} (10*N _{freq})	
0.128	0.64*N _{freq} (5*N _{freq})	0. 8*N _{freq} (6.25*N _{freq})	
0. 128 <drx- cycle≤2.56</drx- 	Note (5*N _{freq})	Note (5*N _{freq})	
Note: Time depe	ends upon the DRX cycle in use		

The measurement accuracy for all measured cells shall be as specified in the TS 36.133[4] sub-clause 9.1.

Reported measurements in periodically triggered measurement reports shall meet the requirements in TS 36.133 [4] section 9.

Reported measurements in event triggered measurement reports shall meet the requirements in TS 36.133 [4] section 9.

The UE shall not send any event triggered measurement reports, as long as the reporting criteria is not fulfilled.

The measurement reporting delay is defined as the time between any event that will trigger a measurement report until the UE starts to transmit the measurement report over the Uu interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is twice the TTI of the uplink DCCH. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify,\,UTRA_TDD}$ defined in TS 36.133 [4] Section 8.1.2.4.3.2 When L3 filtering is used an additional delay can be expected.

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements TS 36.133 [4] in section 9.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in TS 36.133 [4] section 8.1.2.4.3.2.2 Event Triggered Reporting.

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.4.3.2 and A.8.7.2.

8.7.2.4 Test description

8.7.2.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and faders and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.23.
- 2. The general test parameter settings are set up according to Table 8.7.2.4.1-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 8.7.2.4.3.
- 5. There is one E-UTRA TDD serving cell and one UTRA TDD cell specified in the test. Cell 1 (E-UTRA TDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test. Cell 2 (UTRAN TDD cell) is to be searched. Gap pattern configuration # 0 as defined in TS 36.133 [4] table 8.1.2.1-1 is provided.

Table 8.7.2.4.1-1: General test parameters for E-UTRAN TDD to UTRAN 1.28Mcps TDD cell search when DRX is used in fading propagation conditions

Parameter	Unit	Test 1	Test 2	Comment
		Value		
PDSCH parameters		DL Reference Measurement		As specified in section A.1.2. Note that UE
		Channel R.0 TDD)	may only be allocated at On Duration
PCFICH/PDCCH/PHICH		DL Reference Me	asurement	As specified in section A.2.2.
parameters		Channel R.6 TDD)	
Active cell		Ce		E-UTRAN TDD cell
Neighbour cell		Ce	II 2	UTRAN 1.28Mcps TDD cell
Gap Pattern Id		()	As specified in 3GPP TS 36.133 section
				8.1.2.1.
Uplink-downlink		1	[As specified in 3GPP TS 36.211 section
configuration				4.2 Table 4.2-2
Special subframe		(3	As specified in table 4.2-1 in TS 36.211.
configuration				The same configuration in both cells
PRACH configuration		53		As specified in table 5.7.1-3 in 3GPP TS 36.211
CP length of cell 1		Normal		
Ofn	dB	0		
Thresh	dBm	-83		Absolute P-CCPCH RSCP threshold for event B1
Hysteresis	dB	()	
TimeToTrigger	S	()	
Filter coefficient		()	L3 filtering is not used
Access Barring Information	-	Not Sent		No additional delays in random access procedure.
DRX		ON		DRX related parameters are defined in Table 8.7.2.5-3
Time offset between cells	ms	3		Asynchronous cells
				3ms or 92160*Ts
T1	S	Ę	5	
T2	S	8	30	

8.7.2.4.2 Test procedure

The test consists of one active cell and one neighbour cell. In the measurement control information it is indicated to the UE that event-triggered reporting with Event B1 is used. The test consists of two successive time periods, with time durations of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

In Test 1 UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignmend. Furthermore UE is allocated wit hPUSCH resource at every DRX cycle. In Test 2 the uplink time alignment is not maintained and UnE needs to use RACH to obtain UL allocation for measurement reporting.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table's 8.7.2.5-1 and 8.7.2.5-2. Propagation conditions are set according to Annex B clause B.1.1 and B.2.2. T1 starts.
- 3. The SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table's 8.7.2.5-1 and 8.7.2.5-2. T2 starts.
- 6. UE shall transmit a MeasurementReport message triggered by Event B1. If the overall delay measured from the beginning of time period T2 is less than 6442 ms for Test1 or less than 26882 ms for Test2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

- 7. After the SS receive the MeasurementReport message in step 6) or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. SS shall set Cell 2 cell parameter id = (current Cell 2 cell parameter id+4) mod 16 for next iteration of the test procedure loop.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A, or
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A,
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.
- 11. Repeat step 1-10 for each sub-test in Table 8.7.2.4.1-1 as appropriate.

8.7.2.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.7.2.4.3-1: Common Exception messages for E-UTRAN TDD to UTRAN 1.28Mcps TDD cell search when DRX is used in fading propagation

Default Message Contents		
Common contents of system information		
blocks exceptions		
Default RRC messages and information	Table H.3.1-7	
elements contents exceptions	Table H.3.7-1	
	Table H.3.7-2	
	Table H.3.7-3	

Table 8.7.2.4.3-2: RRCConnectionReconfiguration: Additional E-UTRAN TDD to UTRAN 1.28Mcps
TDD cell search when DRX is used in fading propagation

Derivation Path: TS 36.508 [7] clause 4.6.1, Table 4.6.1-8 RRCConnectionReconfiguration					
Information Element	Value/remark	Comment	Condition		
RRCConnectionReconfiguration ::= SEQUENCE {					
rrc-TransactionIdentifier	RRC-				
	TransactionIdentifier-DL				
criticalExtensions CHOICE {					
c1 CHOICE{					
rrcConnectionReconfiguration-r8 SEQUENCE {					
measConfig	MeasConfig -DEFAULT				
radioResourceConfigDedicated	RadioResourceConfigDed icated-HO				
}					
}					
}					
}					

Table 8.7.2.4.3-3: *MeasConfig-DEFAULT*: Additional E-UTRAN TDD to UTRAN 1.28Mcps TDD cell search when DRX is used in fading propagation

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-1 MeasConfig-DEFAULT:					
Information Element	Value/remark	Comment	Condition		
MeasConfig-DEFAULT ::= SEQUENCE {					
measObjectToRemoveList	Not present				
measObjectToAddModList SEQUENCE (SIZE	2 entry				
(1maxObjectId)) OF SEQUENCE {					
MeasObjectToAddMod SEQUENCE {					
measObjectId	IdMeasObject-f1				
measObject CHOICE {					
measObject EUTRA	MeasObjectEUTRA- GENERIC(f1)	E-UTRA Cell			
}					
}					
MeasObjectToAddMod SEQUENCE {					
measObjectId	IdMeasObject-f8				
measObject CHOICE {					
measObjectUTRA	MeasObjectUTRA- GENERIC(f8)	UTRA Cell			
}					
}					
}					
reportConfigToRemoveList	Not present				
reportConfigToAddModList SEQUENCE (SIZE	1 entry				
(1maxReportConfigId))OF SEQUENCE {					
reportConfigld	idReportConfig-B1				
reportConfig	ReportConfigInterRAT- B1-UTRA				
}	Bronot				
measIdToRemoveList	Not present				
measIdToAddModList SEQUENCE (SIZE	1 entry				
(1maxMeasId)) of SEQUENCE {					
measld	1				
measObjectId	IdMeasObject-f8				
reportConfigld	idReportConfig-B1				
}					
quantityConfig	QuantityConfig- DEFAULT				
measGapConfig	MeasGapConfig-GP1				
s-Measure	Not present				
preRegistrationInfoHRPD	Not present				
speedStatePars	·				
Specusialerais	Not present		+		
}					

Table 8.7.2.4.3-4: ReportConfigInterRAT-B1-UTRA: Additional E-UTRAN TDD to UTRAN 1.28Mcps
TDD cell search when DRX is used in fading propagation

Derivation Path: 36.508 clause 4.6.6 Table 4.6.6-7B			
Information Element	Value/remark	Comment	Condition
ReportConfigInterRAT-B1-UTRA(UTRA-Thres) ::=			
SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventB1 SEQUENCE {			
b1-Threshold CHOICE {			
b1-ThresholdUTRA CHOICE {			
thresholdUTRA-RSCP	32	UTRA-Thres + 115 UTRA-Thres is actual RSCP value in dBm	UTRA-TDD
}			
}			
}			
}			
hysteresis	0	The actual value is IE value * 0.5 dB INTEGER (030)	
timeToTrigger	ms0		
}			
}			
}			

Table 8.7.2.4.3-5: SchedulingRequest-Config-DEFAULT: Additional E-UTRAN TDD to UTRAN 1.28Mcps TDD cell search when DRX is used in fading propagation

Information Element	Value/remark	Comment	Condition
SchedulingRequest-Config-DEFAULT ::= CHOICE {			
setup SEQUENCE {			
sr-PUCCH-ResourceIndex	41	Channel- bandwidth- dependent parameter	
sr-ConfigIndex	0		
dsr-TransMax	n4		
}			
}			

Table 8.7.2.4.3-6: *MeasResults*: Additional E-UTRAN TDD to UTRAN 1.28Mcps TDD cell search when DRX is used in fading propagation

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1		
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListUTRA	MeasResultListUTRA		
}			
}			

Table 8.7.2.4.3-7: *MeasResultListUTRA*: Additional E-UTRAN TDD to UTRAN 1.28Mcps TDD cell search when DRX is used in fading propagation

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId CHOICE {			
tdd	12	PhysCellIdUTRA-	
		TDD	
		INTEGER (0127)	
}			
measResult SEQUENCE {			
utra-RSCP		Set according to	
		specific test	
		INTEGER (-591)	
}			
}			

8.7.2.5 Test requirement

The common test parameters are given in Tables 8.7.2.4.1-1, 8.7.2.5-1 and 8.7.2.5-2. DRX configuration for Test1 and Test2 are given in Table 8.7.2.5-3 and time alignment timer and scheduling request related parameters in Table 8.7.2.5-4.

Table 8.7.2.5-1: Cell specific test parameters for E-UTRAN TDD to UTRAN 1.28Mcps TDD cell search when DRX is used in fading propagation conditions (cell 1)

Parameter	Parameter Unit		ell 1
		T1	T2
E-UTRA RF Channel			1
Number			
BW _{channel}	MHz		10
OCNG Patterns defined		OP.	1 TDD
in D.2.1 (OP.1 TDD)			
PBCH_RA	dB		
PBCH_RB	dB		
PSS_RB	dB		
SSS_RB	dB		
PCFICH_PA	dB		
PHICH_PA	dB		
PHICH_PB	dB	0	0
PDCCH_PA	dB] 0	0
PDCCH_PB	dB		
PDSCH_PA	dB		
PDSCH_PB	dB		
OCNG_RA ^{Note1}	dB		
OCNG_RB ^{Note1}	dB		

\hat{E}_{s}/I_{ot}	dB 4		4
\hat{E}_s/N_{oc}	dB	4 4	
Note 2	dBm/15kHz	-(98
RSRP Note 3	dBm/15kHz	-94	-94
SCH_RP Note 3	dBm/15kHz	-94	-94
Propagation Condition		ETI	J70

Note 1: OCNG shall be used such that cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for

 $N_{\it oc}$ to be fulfilled.

Note 3: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.7.2.5-2: Cell specific test parameters for E-UTRAN TDD to UTRAN 1.28Mcps TDD cell search when DRX is used in fading propagation conditions (cell 2)

Parameter	Unit		Cell 2	(UTRA)	
Timeslot Number		()	Dwl	PTS
		T1	T2	T1	T2
UTRA RF Channel Number NOTE1			Char	nel 2	
PCCPCH_Ec/lor	dB	-3	-3		
DwPCH_Ec/lor	dB			0	0
OCNS_Ec/lor ^{NOTE2}	dB	-3	-3		
\hat{I}_{or}/I_{oc}	dB	-inf	9	-inf	9
I_{oc}	dBm/1.28 MHz		-80	.40	
PCCPCH RSCP	dBm	-inf	- 74.40 +TT	n.a.	n.a.
Propagation Condition				3 ^{NOTE3}	

Note 1: In the case of multi-frequency cell, the UTRA RF Channel Number is the primary frequency's channel number.

Note 2: The power of the OCNS channel that is added shall make the total power from the cell to be equal to lor.

Note 3: Case 3 propagation conditions are defined in Annex B of 3GPP TS 25.102

Table 8.7.2.5-3: drx-Configuration to be used in E-UTRAN TDD to UTRAN 1.28Mcps TDD cell search when DRX is used in fading propagation conditions

Field	Test1	Test2	Comment
rieiu	Value	Value	
onDurationTimer	psf1	psf1	
drx-InactivityTimer	psf1	psf1	
drx-RetransmissionTimer	psf1	psf1	
longDRX-CycleStartOffset	sf40	sf1280	
shortDRX	disable	disable	

Table 8.7.2.5-4: *TimeAlignmentTimer* and *sr-ConfigIndex* -Configuration to be used in E-UTRAN TDD to UTRAN 1.28Mcps TDD cell search when DRX is used in fading propagation conditions

Field	Test1	Test2	Comment
rieid	Value	Value	
TimeAlignmentTimer	sf500	sf500	For further information see section 6.3.2 in 3GPP TS 36.331.
sr-ConfigIndex	0	0	For further information see section 6.3.2 in 3GPP TS 36.331 and 10.1 in 3GPP TS 36.213.

In Test 1 when DRX cycle length = 40 ms is used, the overall delay measured is defined as the time from the beginning of time period T2, to the moment when the UE send one Event B1 triggered the measurement report on PUSCH.

In Test 2 when DRX cycle length = 1280 ms is used, the overall delay measured is defined as the time from the beginning of time period T2, to the moment when the UE starts to send preambles on the PRACH for scheduling request (SR) to obtain allocation to send the measurement report on PUSCH.

For both tests:

The overall delay measured may be up to 2xTTI_{DCCH} higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

NOTE 1: The actual overall delays measured in the test may be up to one DRX cycle higher than the measurement reporting delays above because UE is allowed to delay the initiation of the measurement reporting procedure to the next until the Active Time.

NOTE 2: In order to calculate the rate of correct events the system simulator shall verify that it has received correct Event B1 measurement report

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The overall delay measured when DRX cycle length is 40 ms test requirement is expressed as:

Overall delay measured = measurement reporting delay + TTI insertion uncertainty + DRX cycle length

Measurement reporting delay = $T_{identify, UTRA TDD}$ =

$$\mathbf{T}_{\text{identify, UTRA_TDD}} = \textit{Max} \bigg\{ 5000, \mathbf{T}_{\text{basic identify UTRA_TDD}} \cdot \frac{480}{\mathbf{T}_{\text{interl}}} \cdot N_{\textit{Freq}} \bigg\} \textit{ms}$$

Where:

 $T_{basic_identify_UTRA_TDD} = 800$ ms. It is the time period used in the inter RAT equation where the maximum allowed time for the UE to identify a new UTRA TDD cell is defined.

 $T_{Inter1} = 60 \text{ ms.}$

 $N_{freq} = 1$. It is defined in TS 36.133 [4] clause 8.1.2.1.1.

TTI insertion uncertainty = 2 ms

DRX cycle length = 40 ms

The overall delay measured when DRX cycle length is 40 ms shall be less than a total of 6442 ms.

The overall delay measured when DRX cycle length is 1280 ms test requirement is expressed as:

Overall delay measured = measurement reporting delay + TTI insertion uncertainty + DRX cycle length

Measurement reporting delay = $T_{identify_UTRA_TDD}$

 $T_{identify_UTRA_TDD} = 25600$ ms. When DRX cycle length is 1280 ms the $T_{identify_UTRA_TDD}$ is 20 x 1280 ms.

TTI insertion uncertainty = 2 ms

DRX cycle length = 1280 ms

The overall delay measured when DRX cycle length is 1280 ms shall be less than a total of 26882 ms.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

8.7.3 E-UTRAN TDD - UTRAN TDD SON ANR cell search reporting under AWGN propagation conditions

Editor's note: This section is incomplete. The following aspects are either missing or not yet determined:

- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined

8.7.3.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of the strongest UTRAN TDD cell for SON automatic neighbour relations. This test will partly verify the E-UTRAN TDD - UTRAN TDD cell search requirements for identification of a new UTRA TDD cell for SON given in section TS 36.133[4] 8.1.2.4.7.13.1.

8.7.3.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward that support UTRA TDD.

8.7.3.3 Minimum conformance requirements

When no DRX is used the UE shall be able to identify a new cell within:

$$T_{\text{identify, UTRA_TDD}} = T_{\text{basic_identify_UTRA_TDD}} \cdot \frac{480}{T_{\text{inter1}}} \cdot N_{\text{Freq}} \quad ms$$

 $T_{basic_identify_UTRA_TDD} = 800$ ms. This is the time period used in the above equation where the maximum allowed time for the UE to identify a new UTRA TDD cell is defined.

A cell shall be considered identifiable following conditions are fulfilled:

- P-CCPCH Ec/Io > -8 dB,
- DwPCH_Ec/Io \geq -5 dB.

When L3 filtering is used an additional delay can be expected.

If the UE is unable to identify the UTRA TDD cell for SON within $8*T_{identify,\ UTRA_TDD}$ ms, the UE may stop searching UTRA TDD cells for SON.

The UE shall not report the physical cell identity of an identifiable cell for SON as long as the reporting criteria are not fulfilled.

The reporting delay is defined as the time between the identification of the strongest cell for SON until the UE starts to transmit its physical cell identity over the Uu interface. This requirement assumes that the reporting of the physical cell identity is not delayed by other RRC signalling on the DCCH. This reporting delay excludes a delay uncertainty resulted when inserting the physical cell identity of the strongest cell for SON to the TTI of the uplink DCCH. The delay uncertainty is twice the TTI of the uplink DCCH. This reporting delay excludes any delay caused by unavailability of UL resources for UE sending the physical cell identity of the strongest cell for SON.

The reporting delay of the physical cell identity of the strongest cell for SON without L3 filtering shall be less than $T_{identify,\,UTRA_TDD}$ defined in section 8.1.2.4.13.1.1 in TS36.133 and in section 8.1.2.4.13.1.2 in TS36.133 for non DRX and DRX cases respectively. When L3 filtering is used an additional delay can be expected.

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.4.13 and A.8.7.3.

8.7.3.4 Test description

8.7.3.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and faders and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.22.
- 2. The general test parameter settings are set up according to Table 8.7.3.4.1-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 8.7.3.4.3.
- 5. There is one E-UTRA TDD serving cell and one UTRA TDD cell specified in the test. Cell 1 (E-UTRA TDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 8.7.3.4.1-1: General test parameters for E-UTRAN TDD-UTRAN TDD cell search reporting for SON ANR in AWGN propagation conditions

Parameter	Unit	Value	Comment
PDSCH parameters (E-UTRAN TDD)		DL Reference Measurement Channel R.0 TDD	As specified in section A.1.2
PCFICH/PDCCH/PHICH parameters (E-UTRAN TDD)		DL Reference Measurement Channel R.6 TDD	As specified in section A.2.2
Gap Pattern Id		1	As specified in 3GPP TS 36.133 section 8.1.2.1.
Active cell		Cell 1	Cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		Cell 2	Cell 2 is on UTRA RF channel number 1.
CP length		Normal	Applicable to cell 1
E-UTRA RF Channel Number		1	One E-UTRA TDD carrier frequency is used.
UTRA RF Channel Number		1	One UTRA TDD carrier frequency is used.
E-UTRA Channel Bandwidth (BW _{channel})	MHz	10	
Uplink-downlink configuration of cell 1		1	As specified in table 4.2.2 in TS 36.211
Special subframe configuration of cell 1		6	As specified in table 4.2.1 in TS 36.211
Inter-RAT (UTRA TDD) measurement quantity		P-CCPCH RSCP	
Filter coefficient		0	L3 filtering is not used.
DRX		OFF	
Monitored UTRA TDD cell list size		None	No explicit neighbour list is provided to the UE
T1	S	>5	During T1, cell 2 shall be powered off, and during the off time the scrambling code shall be changed, The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T2.
T2	S	14	

8.7.3.4.2 Test procedure

The test consists of one active E-UTRAN cell and one neighbour UTRAN cell. In the measurement control information it is indicated to the UE that periodical reporting with the purpose 'reportStrongestCellsForSON' is used. The test consists of two successive time periods, with time durations of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Tables 8.7.3.5-1 and 8.7.3.5-2. Propagation conditions are set according to Annex B clauses B.1.1. T1 starts.
- 3. The SS shall set Cell 2 primary scrambling code = ((current cell 2 primary scrambling code 50) mod 200 + 100) for the next iteration of the test procedure loop.
- 4. SS shall transmit an RRCConnectionReconfiguration message.
- 5. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Tables 8.7.3.5-1 and 8.7.3.5-2.
- 7. The UE shall transmit a MeasurementReport message containing the primary scrambling code of cell 2. If the overall delays measured from the beginning of time period T2 is less than 12802 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.
- 8. After the SS receive the MeasurementReport message in step 7) or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A, or
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

8.7.3.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.7.3.4.3-1: Common Exception messages for E-UTRAN TDD-UTRAN TDD cell search reporting for SON ANR in AWGN propagation conditions

Default Message Contents			
Common contents of system information			
blocks exceptions			
Default RRC messages and information	Table H.3.1-1		
elements contents exceptions	Table H.3.1-7		

Table 8.7.3.4.3-2: *MeasConfig-DEFAULT*: Additional E-UTRAN TDD-UTRAN TDD cell search reporting for SON ANR in AWGN propagation conditions

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4	.6.6-1 MeasConfig-DEFAULT		
Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModList SEQUENCE (SIZE	2 entry		
(1maxObjectId)) OF SEQUENCE {			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f1		
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA- GENERIC(f1)	E-UTRA Cell	
}			
}			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f9		
measObject CHOICE {			
MeasObjectUTRA	MeasObjectUTRA- GENERIC(f9)	UTRA Cell	
}			
}			
}			
reportConfigToRemoveList	Not present		
reportConfigToAddModList SEQUENCE (SIZE	1 entry		
(1maxReportConfigId))OF SEQUENCE {			
MeasObjectToAddMod SEQUENCE {			
reportConfigId	idReportConfig		
reportConfig CHOICE {			
reportConfigInterRAT	ReportConfigInterRAT- SON-UTRA		
}			
}			
}			
measIdToRemoveList	Not present		
measIdToAddModList SEQUENCE (SIZE (1maxMeasId)) of SEQUENCE {	1 entry		
measld	1		
measObjectId	IdMeasObject-f9		
reportConfigId	idReportConfig		
}			
quantityConfig	QuantityConfig-DEFAULT		UTRAN
measGapConfig	MeasGapConfig-GP2		
s-Measure	Not present		
preRegistrationInfoHRPD	Not present		
speedStatePars	Not present		
}			

Table 8.7.3.4.3-3: ReportConfigInterRAT-SON-UTRA: Additional E-UTRAN TDD-UTRAN TDD cell search reporting for SON ANR in AWGN propagation conditions

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
ReportConfigInterRAT-SON-UTRA::= SEQUENCE {			
triggerType CHOICE {			
periodical SEQUENCE {			
purpose ENUMERATED {	reportStrongestCellForSO N		
}			
}			
}			
maxReportCells	1		
reportInterval	ms1024		
reportAmount	r1		
}			

Table 8.7.3.4.3-4: *MeasResults*: Additional E-UTRAN TDD-UTRAN TDD cell search reporting for SON ANR in AWGN propagation conditions

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListUTRA	MeasResultListUTRA		
}			

Table 8.7.3.4.3-5: *MeasResultListUTRA*: Additional E-UTRAN TDD-UTRAN TDD cell search reporting for SON ANR in AWGN propagation conditions

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF MeasResultUTRA			
MeasResultUTRA ::= SEQUENCE {			
physCellId CHOICE {			
tdd	PhysCellIdUTRA-TDD	The primary scrambling code, as defined in TS 25.331	
}			
measResult SEQUENCE {			
utra-RSCP		Set according to specific test	
}			
}			

8.7.3.5 Test requirement

Tables 8.7.3.4.1-1, 8.7.3.5-1 and 8.7.3.5-2 define the primary level settings including test tolerances for UTRAN TDD cell search for SON ANR under AWGN propagation conditions test.

Table 8.7.3.5-1: Cell specific test parameters for E-UTRAN TDD (cell # 1) for UTRAN TDD cell search for SON ANR under AWGN propagation conditions

Parameter	Unit	Cell 1		
		T1	T2	
E-UTRA RF Channel Number		1		
BW _{channel}	MHz	1	0	
OCNG Patterns defined in		OP.1	TDD	
D.2.1 (OP.1 TDD)		OF.1	טטו	
PBCH_RA	dB			
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB	C)	
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA ^{Note 1}	dB			
OCNG_RB ^{Note 1}	dB			
\hat{E}_{s}/I_{ot}	dB	4+TT	4+TT	
$N_{oc}^{$	dBm/15 kHz	-9	98	
\hat{E}_s/N_{oc}	dB	4+TT	4+TT	
RSRP Note 4	dBm/15 kHz	-94+TT	-94+TT	
SCH_RP	dBm/15 kHz	-94+TT	-94+TT	
Propagation Condition		AW	GN	
Note 1: OCNG shall be used su	ch that both calls	are fully allocated an	d a constant total	

- Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
- Note 3: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
- Note 4: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.7.3.5-2: Cell specific test parameters for UTRAN TDD (cell # 2) for UTRAN TDD cell search for SON ANR under AWGN propagation conditions

452

Parameter	Unit	Cell 2				
		T1 T		T2		
UTRA RF Channel number Note2		Channel 2				
DL timeslot number		0	DwPTS	0	DwPTS	
PCCPCH_Ec/lor	dB	-3		-3		
DwPCH_Ec/lor	dB		0		0	
OCNS_Ec/lor	dB	-3		-3		
Îor/loc	dB	-Infinity		5+	5+TT	
PCCPCH RSCP Note1	dBm	-Infinity	n.a.	-73	n.a.	
lo Note1	dBm/1.28MHz	-Infinity -70.88).88		
loc	dBm/1.28MHz	-75				
Propagation condition		AWGN				

Note 1: PCCPCH RSCP and lo levels have been calculated from other parameters for

information purposes. They are not settable parameters themselves.

Note 2: In the case of multi-frequency network of 1.28 Mcps TDD, the UTRA RF Channel

Number can be set for the primary frequency in this test.

The UE shall send the first measurement report containing the primary scrambling code of cell 2, with a measurement reporting delay less than 12800 ms from the beginning of time period T2.

When no DRX is used the UE shall be able to identify a new cell within:

$$T_{\text{identify, UTRA_TDD}} = T_{\text{basic_identify_UTRA_TDD}} \cdot \frac{480}{T_{\text{interl}}} \cdot N_{\text{Freq}} \quad \text{ms}$$

 $T_{basic_identify_UTRA_TDD} = 800$ ms. This is the time period used in the above equation where the maximum allowed time for the UE to identify a new UTRA TDD cell is defined.

 $T_{Inter1} = 30 \text{ ms. } TTI \text{ insertion uncertainty} = 2 \text{ ms}$

The overall delays measured shall be less than a total of 12802 ms in this test case (note: this gives a total of 12800 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

The rate of correct measurement reports observed with this delay during repeated tests shall be at least 90% with a confidence level of 95%.

8.8 E-UTRAN FDD - GSM measurements

8.8.1 E-UTRAN FDD - GSM event triggered reporting in AWGN

8.8.1.1 Test purpose

To verify the UE's ability to make a correct reporting of an event when doing inter-RAT (GSM) measurements under AWGN condition within the E-UTRA FDD - GSM cell search requirements.

8.8.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward that support GSM.

8.8.1.3 Minimum conformance requirements

Measurements on GSM cells can be requested with BSIC verified.

In RRC_CONNECTED state when a supported measurement gap pattern sequence according to Table 8.1.2.1-1 in TS 36.133 [4] is configured by E-UTRAN the UE shall continuously measure GSM cells, search for new GSM cells given in the monitored set and re-confirm the BSIC for already detected cells. During DRX periods the UE may use other periods of time outside the specified measurement gap patterns.

453

This measurement shall be based on measurement gaps allocated for GSM carrier RSSI measurement as described in section 8.1.2.1 in TS 36.133 [4] A UE supporting GSM measurements shall measure minimum number of 10 GSM carrier RSSI measurement samples ($N_{GSM\ carrier\ RSSI}$) per measurement gap. In RRC_CONNECTED state the measurement period, $T_{Measurement\ Period,\ GSM}$, for the GSM carrier RSSI measurement is N_{freq} * 480 ms. The parameter N_{freq} is defined in clause 8.1.2.1.1 [4] as $N_{freq} = N_{freq,\ E-UTRA} + N_{freq,\ UTRA} + M_{gsm}$

Where:

N_{freq, E-UTRA} is the number of E-UTRA carriers being monitored

N_{freq, UTRA} is the number of UTRA carriers being monitored

 M_{GSM} is an integer which is a function of the number of GSM carriers on which measurements are being performed. M_{GSM} is equal to 0 if no GSM carrier is being monitored. For a Measurement Gap Repetition Period (MGRP) of 40 ms, M_{GSM} is equal to 1 if cells on up to 32 GSM carriers are being measured. For a MGRP of 80 ms, M_{GSM} is equal to ceil ($N_{carriers, GSM}/20$) where $N_{carriers, GSM}$ is the number of GSM carriers on which cells are being measured

The UE shall meet the measurement accuracy requirements stated for RXLEV in TS 45.008 [15], when the given measurement time allows the UE to take at least 3 GSM carrier RSSI samples per GSM carrier in the monitored set during the measurement period.

In case the UE is not able to acquire the required number of samples per GSM carrier during one measurement period, the UE shall measure as many GSM carriers as possible during that measurement period using at least 3 samples per GSM carrier. The GSM carriers that were not measured during that measurement period shall be measured in the following measurement periods.

Measurements on a GSM cell can be requested with BSIC verified. The UE shall be able to report the GSM cells with BSIC verified for those cells where the verification of BSIC has been successful.

The procedure for BSIC verification on a GSM cell can be divided into the following two tasks:

- **Initial BSIC identification:** Includes searching for the BSIC and decoding the BSIC for the first time when there is no knowledge about the relative timing between the E-UTRAN FDD and GSM cells. The UE shall trigger the initial BSIC identification within the available measurement gap pattern sequence. The requirements for BSIC re-confirmation can be found in section 8.1.2.4.5.1.2.1 of TS 36.133 [4].
- **BSIC re-confirmation:** Tracking and decoding the BSIC of a GSM cell after initial BSIC identification is performed. The UE shall trigger the BSIC re-confirmation within the available measurement gap pattern. The requirements for BSIC re-confirmation can be found in section 8.1.2.4.5.1.2.2 of TS 36.133 [4].

If the network requests measurements on a GSM cell, the UE shall behave as follows:

- The UE shall perform GSM carrier RSSI measurements according to section 8.1.2.4.5.1 in TS 36.133 [4] when a measurement gap pattern sequence is activated.
- The UE shall perform measurement reporting as defined in TS 36.331 [5].
- The UE shall perform BSIC identification. The UE shall use the most recently available GSM carrier RSSI measurement results for arranging GSM cells in signal strength order for performing BSIC identification.
- The UE shall perform BSIC re-confirmation on all the GSM cells that have been successfully identified.
- The UE shall perform all configured event evaluation for event-triggered reporting after the BSIC has been verified for a GSM cell. The UE shall use the most recently available GSM carrier RSSI measurement results in event evaluation and event-triggered reporting.
- Event-triggered and periodic reports shall be triggered according to TS 36.331 [5].

The BSIC of a GSM cell is considered to be "verified" if the UE has decoded the SCH of the BCCH carrier and identified the BSIC at least one time (initial BSIC identification). Once a GSM cell has been identified the BSIC shall be re-confirmed at least once every $8*T_{re-confirm,GSM}$ seconds. Otherwise the BSIC of the GSM cell is considered as "non-verified". If a measurement gap pattern sequence is deactivated by the network after BSIC has been identified or verified, the UE shall consider the BSIC as non-verified.

 $T_{identify,GSM}$ indicates the maximum time allowed for the UE to decode the unknown BSIC of the GSM cell in one GSM BCCH carrier in the initial BSIC identification procedure.

 $T_{\text{re-confirm,GSM}}$ indicates the maximum time allowed for the re-confirmation of the BSIC of one GSM cell in the BSIC re-confirmation procedure.

The UE shall be able to decode a BSIC within a measurement gap when the time difference between the middle of the received GSM synchronisation burst at the UE and the middle of the effective measurement gap is within the limits specified in table 8.1.2.4.5.1.2-1 of TS 36.133 [4].

The UE shall be able to perform BSIC verification at levels down to the reference sensitivity level or reference interference levels as specified in TS 45.005 [16].

This measurement shall be based on the measurement gaps used for Initial BSIC identification as described in section 8.1.2.4.5.1.2 of TS 36.133 [4].

The UE shall continuously attempt to decode the BSIC of SCH on the BCCH carrier of the 8 strongest BCCH carriers of the GSM cells indicated in the Inter-RAT cell info list. The UE shall give priority for BSIC decoding attempts in decreasing signal strength order to BCCH carriers with unknown BSIC. The strongest BCCH carrier is defined as the BCCH carrier having the highest measured GSM carrier RSSI value.

If the BSIC of the GSM BCCH carrier has been successfully decoded the UE shall immediately continue BSIC identification with the next GSM BCCH carrier, in signal strength order, with unknown BSIC. The GSM cell for which the BSIC has been successfully identified shall be moved to the BSIC re-confirmation procedure.

If the UE has not successfully decoded the BSIC of the GSM BCCH carrier within $T_{identify,GSM}$ ms, the UE shall abort the BSIC identification attempts for that GSM BCCH carrier. The UE shall continue to try to perform BSIC identification of the next GSM BCCH carrier in signal strength order. The GSM BCCH carrier for which the BSIC identification failed shall not be re-considered for BSIC identification until BSIC identification attempts have been made for all the rest of the 8 strongest GSM BCCH carriers in the monitored set with unknown BSIC.

 $T_{identify,GSM}$ values are given for a set of reference gap patterns in table 8.1.2.4.5.1.2.1-1 of TS 36.133 [4]. The requirements in the table represent the time required to guarantee at least two attempts to decode the BSIC for one GSM BCCH carrier.

Reported measurements in event triggered measurement reports shall meet the requirements in section TS 36.331 [5].

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH.

The event triggered reporting delay requirement is valid when the UE for each GSM carrier in the monitored set can take the required number of samples during the measurement period $T_{Measurement\ Period,\ GSM}$ (see section 8.1.2.4.5.1 of TS 36.133 [4]).

The event triggered measurement reporting delay for a GSM cell with verified BSIC , measured without L3 filtering shall be less than $2*T_{Measurement\ Period,\ GSM}$, where $T_{Measurement\ Period,\ GSM}$ is defined in section 8.1.2.4.5.1. of TS 36.133 [4] When L3 filtering is used an additional delay can be expected.

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.4.5 and A.8.8.1

8.8.1.4 Test description

8.8.1.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A Figure A.14.
- 2. The general test parameter settings are set up according to Table 8.8.1.4.1-1.

- 455
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 8.8.1.4.3.
- 5. There is one E-UTRA FDD carrier and one GSM cell specified in the test. Cell 1 (E-UTRA FDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 8.8.1.4.1-1: General test parameters for E-UTRAN FDD-GSM event triggered reporting in AWGN

Parameter	Unit	Value	Comment
PDSCH parameters (E-UTRAN FDD)		Channel R.0 FDD	As specified in section A.1.1.
PCFICH/PDCCH/PHICH parameters (E-UTRAN FDD)		DL Reference Measurement Channel R.6 FDD	As specified in section A.2.1.
Gap Pattern Id		0	As specified in 3GPP TS 36.133 section 8.1.2.1.
Active cell		Cell 1	Cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		Cell 2	Cell 2 is on Absolute RF Channel Number 1 (GSM cell)
CP length		Normal	Applicable to cell 1
E-UTRA RF Channel Number		1	One E-UTRA FDD carrier frequency is used.
E-UTRA Channel Bandwidth (BW _{channel})	MHz	10	
Inter-RAT (GSM) measurement quantity		GSM Carrier RSSI	
b1-Threshold-GERAN	dBm	-80	GSM Carrier RSSI threshold for event B1.
Hysteresis	dB	0	
Time To Trigger	ms	0	
Filter coefficient		0	L3 filtering is not used.
DRX		OFF	
Monitored GSM cell list size		6 GSM neighbours including ARFCN 1	List of GSM cells provided before T2 starts.
T1	S	5	
T2	s	5	

8.8.1.4.2 Test procedure

The test consists of one active cell and one neighbour cell. In the measurement control information it is indicated to the UE that event-triggered reporting with Event B1 is used. The test consists of two successive time periods, with time durations of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 8.8.1.5-1. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table's 8.8.1.5-1 and 8.8.1.5-2.
- 6. UE shall transmit a MeasurementReport message triggered by Event B1. If the measurement reporting delay measured from the beginning of time period T2 is less than 3122 ms then the number of successful tests is increased by one. If the UE fails to report the event within the measurement reporting delay requirement then the number of failure tests is increased by one.
- 7. After the SS receive the MeasurementReport message in step 6) or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

- 8. The SS shall set a different BSIC on Cell 2, as the previous timing information of Cell 2 is invalid in the UE for the next iteration of the test procedure loop.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A,
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

8.8.1.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.8.1.4.3-1: Common Exception messages for E-UTRAN FDD - GSM Event triggered reporting in AWGN

Default Message Contents			
Common contents of system information			
blocks exceptions			
Default RRC messages and information	Table H.3.1-1		
elements contents exceptions	Table H.3.1-6		
·	Table H.3.1-7		

Table 8.8.1.4.3-2: SystemInformationBlockType7: Additional E-UTRAN FDD - GSM Event triggered reporting in AWGN

Value/remark	Comment	Condition
33 (33 dBm)		GSM 400 8
, ,		GSM 900 8
		GSM 850 8
		GSM 700
30 (30 dBm)		DCS 1800
,		& PCS 190
	33 (33 dBm)	33 (33 dBm)

Table 8.8.1.4.3-3: ReportConfigInterRAT-B1-GERAN: Additional E-UTRAN FDD - GSM Event triggered reporting in AWGN

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-7A ReportConfigInterRAT-B1-GERAN(GERAN-Thres)				
Information Element	Value/remark	Comment	Condition	
ReportConfigInterRAT-B1-GERAN(GERAN-Thres)				
::= SEQUENCE {				
triggerType CHOICE {				
event SEQUENCE {				
eventIdeventide CHOICE {				
eventB1 SEQUENCE {				
b1-Threshold CHOICE {				
B1-ThresholdGERAN CHOICE {				
thresholdGERAN	30 (-80 dBm)	-80 is actual value in dBm (30 - 110 dBm)		
}				
}				
}				
hysteresis	0 (0 dB)			
}				
}				
}		_		

Table 8.8.1.4.3-4: MeasResults: Additional E-UTRAN FDD - GSM Event triggered reporting in AWGN

457

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1		
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListGERAN	MeasResultListGERAN		
}			
}			

Table 8.6.1.4.3-5: *MeasResultListGERAN*: Additional E-UTRAN FDD - GSM Event triggered reporting in AWGN

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListGERAN ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
MeasResultGERAN SEQUENCE {			
carrierFreq	CarrierFreqGERAN	Contains the carrier frequency of the target GERAN cell	
physCellId	PhysCellIdGERAN	Contains the Base Station Identity Code (BSIC)	
}			
measResult SEQUENCE {			
rssi		Set according to specific test	
}			
}			

8.8.1.5 Test requirement

Tables 8.8.1.4.1-1, 8.8.1.5-1 and 8.8.1.5-2 define the primary level settings including test tolerances for E-UTRAN FDD-GSM event triggered reporting under AWGN conditions.

Table 8.8.1.5-1: Cell specific test parameters for E-UTRAN FDD (Cell # 1) for event triggered reporting of GSM cell in AWGN

Parameter	Unit	Cell	1
		T1	T2
E-UTRA RF Channel Number		1	
BW _{channel}	MHz	10	
OCNG Pattern defined in D.1.1		OP.1 F	-DD
(OP.1 FDD)			
PBCH_RA	dB		
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB	0	
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA ^{Note 1}	dB		
OCNG_RB ^{Note 1}	dB		
\hat{E}_{s}/I_{ot}	dB	4	4
\hat{E}_s/N_{oc}		4	4
N_{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 kHz	-94	-94
SCH_RP	dBm/15 kHz	-94	-94
Propagation Condition		AWGN	
Note 1. OCNC shall be used a	ush that bath as	lla ana fullu allacatad anal a acoa	tant tatal transmittad marries

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Table 8.8.1.5-2: Cell specific test parameters for GSM (Cell # 2) for event triggered reporting of GSM cell in AWGN

Parameter	Unit	Cell 2	
		T1	T2
Absolute RF Channel Number		ARFNC 1	
RXLEV	dBm	-Infinity	-75
GSM BSIC		N/A	Valid

The overall delay measured is defined as the time from the beginning of time period T2, to the moment the UE sends one Event B1 triggered measurement report including BSIC of Cell 2.

The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delay measured shall be less than a total of 3122 ms in this test case. (The delay for GSM cell identification with BSIC verified is equal to 3120 ms, which is the sum of the event triggered measurement reporting delay and the initial BSIC identification delay plus the TTI insertion uncertainty of 2ms).

The event triggered measurement reporting delay = $2*T_{Measurement\ Period,\ GSM} = 2*480\ ms = 960\ ms$.

Initial BSIC identification delay = 2160 ms.

TTI insertion uncertainty = 2 ms.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

8.8.2 E-UTRAN FDD - GSM event triggered reporting when DRX is used in AWGN

8.8.2.1 Test purpose

To verify the UE's ability to make a correct reporting of an event in DRX when doing inter-RAT (GSM) measurements under AWGN condition within the E-UTRA FDD - GSM cell search requirements.

8.8.2.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward that support GSM.

8.8.2.3 Minimum conformance requirements

Measurements on GSM cells can be requested with BSIC verified.

In RRC_CONNECTED state when a supported measurement gap pattern sequence according to Table 8.1.2.1-1 in TS 36.133 [4] is configured by E-UTRAN the UE shall continuously measure GSM cells, search for new GSM cells given in the monitored set and re-confirm the BSIC for already detected cells. During DRX periods the UE may use other periods of time outside the specified measurement gap patterns. The UE is not required to make measurements of GSM cells during DRX periods if a measurement gap pattern has not been configured.

This measurement shall be based on measurement gaps allocated for GSM carrier RSSI measurement as described in section 8.1.2.1 in TS 36.133 [4]. A UE supporting GSM measurements shall measure minimum number of 10 GSM carrier RSSI measurement samples ($N_{GSM\ carrier\ RSSI}$) per DRX cycle. In RRC_CONNECTED state the measurement period, $T_{Measurement\ Period,\ GSM}$, for the GSM carrier RSSI measurement is shown in Table 8.1.2.4.5.2.1-1 in TS 36.133 [4]. The parameter N_{freq} is defined in clause 8.1.2.1.1 [4] as $N_{freq} = N_{freq,\ E-UTRA} + N_{freq,\ UTRA} + M_{gsm}$

Where:

N_{freq, E-UTRA} is the number of E-UTRA carriers being monitored

 $N_{\text{freq, UTRA}}$ is the number of UTRA carriers being monitored

 M_{GSM} is an integer which is a function of the number of GSM carriers on which measurements are being performed. M_{GSM} is equal to 0 if no GSM carrier is being monitored. For a Measurement Gap Repetition Period (MGRP) of 40 ms, M_{GSM} is equal to 1 if cells on up to 32 GSM carriers are being measured. For a MGRP of 80 ms, M_{GSM} is equal to ceil ($N_{carriers, GSM}/20$) where $N_{carriers, GSM}$ is the number of GSM carriers on which cells are being measured

The UE shall meet the measurement accuracy requirements stated for RXLEV in TS 45.008 [15], when the given measurement time allows the UE to take at least 3 GSM carrier RSSI samples per GSM carrier in the monitored set during the measurement period.

In case the UE is not able to acquire the required number of samples per GSM carrier during one measurement period, the UE shall measure as many GSM carriers as possible during that measurement period using at least 3 samples per GSM carrier. The GSM carriers that were not measured during that measurement period shall be measured in the following measurement periods.

Measurements on a GSM cell can be requested with BSIC verified. The UE shall be able to report the GSM cells with BSIC verified for those cells where the verification of BSIC has been successful.

The procedure for BSIC verification on a GSM cell can be divided into the following two tasks:

- **Initial BSIC identification:** Includes searching for the BSIC and decoding the BSIC for the first time when there is no knowledge about the relative timing between the E-UTRAN FDD and GSM cells.
- BSIC re-confirmation: Tracking and decoding the BSIC of a GSM cell after initial BSIC identification is performed. The UE shall trigger the BSIC re-confirmation within the available measurement gap pattern. The requirements for BSIC re-confirmation can be found in section 8.1.2.4.5.1.2.2 of TS 36.133 [4].

If the network requests measurements on a GSM cell, the UE shall behave as follows:

- The UE shall perform GSM carrier RSSI measurements according to section 8.1.2.4.5.2.1 in TS 36.133 [4] when a measurement gap pattern sequence is activated.
- The UE shall perform measurement reporting as defined in TS 36.331 [5].
- The UE shall perform BSIC identification. The UE shall use the most recently available GSM carrier RSSI measurement results for arranging GSM cells in signal strength order for performing BSIC identification.
- The UE shall perform BSIC re-confirmation on all the GSM cells that have been successfully identified.
- The UE shall perform all configured event evaluation for event-triggered reporting after the BSIC has been verified for a GSM cell. The UE shall use the most recently available GSM carrier RSSI measurement results in event evaluation and event-triggered reporting.
- Event-triggered and periodic reports shall be triggered according to TS 36.331 [5].

The BSIC of a GSM cell is considered to be "verified" if the UE has decoded the SCH of the BCCH carrier and identified the BSIC at least one time (initial BSIC identification). Once a GSM cell has been identified the BSIC shall be re-confirmed at least once every $8*T_{re-confirm,GSM}$ seconds. Otherwise the BSIC of the GSM cell is considered as "non-verified". If a measurement gap pattern sequence is deactivated by the network after BSIC has been identified or verified, the UE shall consider the BSIC as non-verified.

The UE shall be able to perform BSIC verification at levels down to the reference sensitivity level or reference interference levels as specified in TS 45.005 [16].

This measurement shall be made on GSM cells that are required with BSIC verified.

For DRX cycle length \leq 40 ms, the initial GSM BSIC identification requirements corresponding to the non DRX requirements as specified in section 8.1.2.4.5.1.2.1 in TS 36.133 [4] shall apply.

For DRX cycle length > 40 ms, the UE shall make at least one attempt every N_{freq} *30s to decode the BSIC of SCH on the BCCH carrier of the 8 strongest BCCH carriers of the GSM cells indicated in the Inter-RAT cell info list. If the UE has not successfully decoded the BSIC of the GSM BCCH carrier within N_{freq} *60 s, the UE shall abort the BSIC identification attempts for that GSM BCCH carrier. The UE shall give priority for BSIC decoding attempts in decreasing signal strength order to BCCH carriers with unknown BSIC. The strongest BCCH carrier is defined as the BCCH carrier having the highest measured GSM carrier RSSI value. The parameter N_{freq} is defined in section 8.1.2.1.1 in TS 36.133 [4].

If the BSIC of the GSM BCCH carrier has been successfully decoded the UE shall continue BSIC identification with the next GSM BCCH carrier, in signal strength order, with unknown BSIC. The GSM cell for which the BSIC has been successfully identified shall be moved to the BSIC re-confirmation procedure.

The UE shall maintain the timing information of up to 8 identified GSM cells. Initial timing information is obtained from the initial BSIC identification. The timing information shall be updated every time the BSIC is decoded.

For DRX cycle length \leq 40 ms, GSM BSIC re-confirmation requirements corresponding to the non DRX requirements as specified in section 8.1.2.4.5.1.2.2 in TS 36.133 [4] shall apply.

For DRX cycle length > 40 ms, at least every $N_{\rm freq}$ *30 seconds, the UE shall attempt to decode the BSIC of each identified GSM cell. If the UE fails to decode the BSIC after two successive attempts or if the UE has not been able to re-confirm the BSIC for a GSM cell within $N_{\rm freq}$ *60 seconds, the UE shall abort the BSIC re-confirmation attempts for that GSM cell. The GSM cell shall be treated as a new GSM cell with unidentified BSIC and the GSM cell shall be moved to the initial BSIC identification procedure, see section 8.1.2.4.5.2.2.1 in TS 36.133 [4]. The parameter $N_{\rm freq}$ is defined in section 8.1.2.1.1 in TS 36.133 [4].

Reported measurements in event triggered measurement reports shall meet the requirements in section TS 36.331 [5].

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH.

The event triggered reporting delay requirement is valid when the UE for each GSM carrier in the monitored set can take the required number of samples during the measurement period $T_{Measurement\ Period,\ GSM}$ (see section 8.1.2.4.5.1 of TS 36.133 [4]).

The event triggered measurement reporting delay for a GSM cell with verified BSIC, measured without L3 filtering shall be less than $2*T_{Measurement\ Period,\ GSM}$, where $T_{Measurement\ Period,\ GSM}$ is defined in section 8.1.2.4.5.1 of TS 36.133 [4]. When L3 filtering is used an additional delay can be expected.

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.4.5.2 and A.8.8.2.

8.8.2.4 Test description

8.8.2.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A Figure A.14.
- 2. The general test parameter settings are set up according to Table 8.8.2.4.1-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 8.8.2.4.3.
- 5. There is one E-UTRA FDD carrier and one GSM cell specified in the test. Cell 1 (E-UTRA FDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 8.8.2.4.1-1: General test parameters for E-UTRAN FDD-GSM event triggered reporting when DRX is used in AWGN

Parameter	Unit	Test 1	Test 2	Comment
		Va	lue	
PDSCH parameters (E-		DL Reference Measurement		As specified in section A.1.1.
UTRAN FDD)		Channel R.0 FDD		
PCFICH/PDCCH/PHICH		DL Reference Me		As specified in section A.1.2.
parameters (E-UTRAN FDD)		Channel R.6 FDD)	
Gap Pattern Id		(As specified in 3GPP TS 36.133 [4] section 8.1.2.1.
Active cell		Ce	II 1	Cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		Ce	II 2	Cell 2 is on Absolute RF Channel Number 1 (GSM cell)
CP length		Nor	mal	Applicable to cell 1
E-UTRA RF Channel		,		One E-UTRA FDD carrier frequency is
Number				used.
E-UTRA Channel Bandwidth (BW _{channel})	MHz	10		
Inter-RAT (GSM)		GSM Carrier RSSI		
measurement quantity				
B1-Threshold-GERAN	dBm	-8	30	GSM Carrier RSSI threshold for event B1.
Hysteresis	dB	()	
TimeToTrigger	S	()	
Filter coefficient		()	L3 filtering is not used
PRACH configuration		4		As specified in table 5.7.1-2 in TS 36.211 [9]
Access Barring Information	-	Not Sent		No additional delays in random access procedure.
DRX		ON		DRX related parameters are defined in Table 8.8.2.5-2
Monitored GSM cell list size		6 GSM neighbours including ARFCN 1		List of GSM cells provided before T2 starts.
T1	S	5		
T2	S	5	45	

8.8.2.4.2 Test procedure

The test consists of one active cell and one neighbour cell. In the measurement control information it is indicated to the UE that event-triggered reporting with Event B1 is used. The test consists of two successive time periods, with time durations of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

In Test 1 when DRX = 40 ms is used, UE needs to be provided at least once every 500 ms with new Timing Advance Command MAC control element to restart the Timer Alignment Timer to keep the UE uplink time alignment. Furthermore, the UE is allocated with PUSCH resource at every DRX cycle. In Test 2 when DRX = 1280 ms is used, the uplink time alignment is not maintained and the UE needs to use RACH to obtain uplink allocation for measurement reporting.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 8.8.2.5-1, 8.8.2.5-2, 8.8.2.5-3 and 8.8.2.5-4. propagation conditions are set according to Annex B clause B.1.1.T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table's 8.8.2.5-1 and 8.8.1.5-4. T2 starts.
- 6. UE shall transmit a MeasurementReport message triggered by Event B1. If the overall delays measured from the beginning of time period T2 is less than 3162 ms for Test 1 or less than 44082 ms for Test 2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.
- 7. After the SS receive the MeasurementReport message in step 6) or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. The SS shall set a different BSIC on Cell 2, as the previous timing information of Cell 2 is invalid in the UE for the next iteration of the test procedure loop.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A, or
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.
- 11. Repeat step 1-10 for each sub-test in Table 8.8.2.4.1-1 as appropriate.

8.8.2.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.8.2.4.3-1: Common Exception messages for E-UTRAN FDD - GSM Event triggered reporting when DRX is used in AWGN

Default Message Contents			
Common contents of system information			
blocks exceptions			
Default RRC messages and information	Table H.3.1-6		
elements contents exceptions	Table H.3.1-7		
·	Table H.3.7-1		
	Table H.3.7-2		
	Table H.3.7-3		

Table 8.8.2.4.3-2: SystemInformationBlockType7: Additional E-UTRAN FDD - GSM Event triggered reporting in AWGN

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-3 SystemInformationBlockType7				
Information Element	Value/remark	Comment	Condition	
commonInfo SEQUENCE {				
p-MaxGERAN	33 (33 dBm)		GSM 400 &	
			GSM 900 &	
			GSM 850 &	
			GSM 700	
	30 (30 dBm)		DCS 1800	
			& PCS 1900	
}				

Table 8.8.2.4.3-3: RRCConnectionReconfiguration: Additional E-UTRAN FDD - GSM Event triggered reporting in AWGN

Derivation Path: TS 36.508 [7] clause 4.6.1, Table 4.6 Information Element	Value/remark	Comment	Condition
RRCConnectionReconfiguration ::= SEQUENCE {			
rrc-TransactionIdentifier	RRC-		
	TransactionIdentifier-DL		
criticalExtensions CHOICE {			
c1 CHOICE{			
rrcConnectionReconfiguration-r8 SEQUENCE {			
measConfig	MeasConfig -DEFAULT		
radioResourceConfigDedicated	RadioResourceConfigDed icated-HO		
}			
}			
}			
}			

Table 8.8.2.4.3-4: ReportConfigInterRAT-B1-GERAN: Additional E-UTRAN FDD - GSM Event triggered reporting in AWGN

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-7A ReportConfigInterRAT-B1-GERAN(GERAN-Thres)				
Information Element	Value/remark	Comment	Condition	
ReportConfigInterRAT-B1-GERAN(GERAN-Thres)				
::= SEQUENCE {				
triggerType CHOICE {				
event SEQUENCE {				
eventIdeventide CHOICE {				
eventB1 SEQUENCE {				
b1-Threshold CHOICE {				
B1-ThresholdGERAN CHOICE {				
thresholdGERAN	30 (-80 dBm)	-80 is actual value in dBm (30 - 110 dBm)		
}				
}				
}				
hysteresis	0 (0 dB)			
}				
}				
}				

Table 8.8.2.4.3-5: SchedulingRequest-Config-DEFAULT: Additional E-UTRAN FDD-GSM Event triggered reporting when DRX is used in AWGN

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-20 SchedulingRequest-Config-DEFAULT				
Information Element	Value/remark	Comment	Condition	
SchedulingRequest-Config-DEFAULT ::= CHOICE {				
setup SEQUENCE {				
sr-PUCCH-ResourceIndex	41	10 MHz channel bandwidth parameter		
sr-ConfigIndex	0			
dsr-TransMax	n4			
}				
}				

Table 8.8.2.4.3-6: *MeasResults*: Additional E-UTRAN FDD - GSM Event triggered reporting when DRX is used in AWGN

Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListGERAN	MeasResultListGERAN		
}			

Table 8.8.2.4.3-7: MeasResultListGERAN: Additional E-UTRAN FDD - GSM Event triggered reporting when DRX is used in AWGN

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListGERAN ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
MeasResultGERAN SEQUENCE {			
carrierFreq	CarrierFreqGERAN	Contains the carrier frequency of the target GERAN cell	
physCellId	PhysCellIdGERAN	Contains the Base Station Identity Code (BSIC)	
measResult SEQUENCE {			
rssi		Set according to specific test	
}			
}			

8.8.2.5 Test requirement

Tables 8.8.2.4.1-1, 8.8.2.5-1 and 8.8.2.5-4 define the primary level settings including test tolerances for E-UTRAN FDD-GSM event triggered reporting when DRX is used under AWGN conditions.

Table 8.8.2.5-1: Cell specific test parameters for E-UTRAN FDD (Cell # 1) for event triggered reporting of GSM cell when DRX is used in AWGN

Parameter	Unit	Cell 1		
		T1	T2	
E-UTRA RF Channel Number		1		
BW _{channel}	MHz	10		
OCNG Pattern defined in		OP.1 I	FDD	
D.1.1 (OP.1 FDD)				
PBCH_RA	dB			
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB	0		
PDCCH_RA	dB]		
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA ^{Note 1}	dB			
OCNG_RB ^{Note 1}	dB			
\hat{E}_{s}/I_{ot}	dB	4	4	
Noc Note 2	dBm/15 kHz	-98		
RSRP Note 3	dBm/15 kHz	-94	-94	
SCH_RP	dBm/15 kHz	-94	-94	
\hat{E}_s/N_{oc}	dB	4	4	
Propagation Condition		AWGN		
Note 1: OCNG shall be used	such that both ce	ells are fully allocated and a cons	stant total transmitted power	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled

Note 3: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.8.2.5-2: DRX-Configuration to be used in E-UTRAN FDD - GSM Event triggered reporting when DRX is used in AWGN

Field	Test1	Test2	Comment			
	Value	Value				
onDurationTimer	psf1	psf1				
drx-InactivityTimer	psf1	psf1				
drx-RetransmissionTimer	sf1	sf1				
longDRX-CycleStartOffset	sf40	sf1280				
shortDRX	disable	disable				
Note: For further information see section 6.3.2 in 3GPP TS 36.331 [5].						

Table 8.8.2.5-3: *TimeAlignmentTimer* and *sr-ConfigIndex*-Configuration to be used in E-UTRAN FDD-GSM Event triggered reporting when DRX is used in AWGN

Field	Test1	Test2	Comment
	Value	Value	
TimeAlignmentTimer	sf500	sf500	For further information see section 6.3.2 in 3GPP TS 36.331 [5].
sr-ConfigIndex	0	0	For further information see section 6.3.2 in 3GPP TS 36.331 and section10.1 in 3GPP TS 36.213 [8].

Table 8.8.2.5-4: Cell specific test parameters for GSM (Cell # 2) for event triggered reporting of GSM cell when DRX is used in AWGN

Parameter	Unit	Cell 2		
		T1	T2	
Absolute RF Channel Number		ARFNC 1		
RXLEV	dBm	-Infinity	-75	
GSM BSIC		N/A	Valid	

In Test 1 when DRX cycle length = 40 ms is used, the overall delay measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event B1 triggered measurement report to Cell 2 on PUSCH.

In Test 2 when DRX cycle length = 1280 ms is used, the overall delay measured is defined as the time from the beginning of time period T2, to the moment the UE starts to send preambles on the PRACH for Scheduling Request (SR) to obtain allocation to send the measurement report to Cell 2 on PUSCH.

For both tests:

The overall delay may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

NOTE 1: The actual overall delays measured in the test may be up to one DRX cycle higher than the measurement reporting delays above because UE is allowed to delay the initiation of the measurement reporting procedure to the next until the Active Time.

NOTE 2: In order to calculate the rate of correct events the system simulator shall verify that it has received correct Event B1 measurement report.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The overall delay measured when DRX cycle length is 40 ms test requirement is expressed as:

Overall delay measured = 2*T_{Measurement Period, GSM} + T_{identify, GSM} + TTI insertion uncertainty + DRX cycle length

 $T_{\text{Measurement Period, GSM}} = 480 \text{ ms}$ (as specified in table 8.1.2.4.5.2.1-1 of TS36.133 [4] clause 8.1.2.4.5.2.1)

 $T_{identify, GSM} = 2160 \text{ ms}$ (as specified in table 8.1.2.4.5.1.2.1-1 of TS36.133 [4] clause 8.1.2.4.5.1.2.1)

TTI insertion uncertainty = 2 ms

DRX cycle length = 40 ms

The overall delay measured when DRX cycle length is 40 ms shall be less than a total of 3162 ms.

The overall delay measured when DRX cycle length is 1280 ms test requirement is expressed as:

 $Overall\ delay\ measured = 2*T_{Measurement\ Period,\ GSM} + N_{freq}*30s + TTI\ insertion\ uncertainty + DRX\ cycle\ length$

 $T_{Measurement\ Period,\ GSM} = 6400\ ms$ (as specified in table 8.1.2.4.5.2.1-1 of $TS36.133\ [4]$ clause 8.1.2.4.5.2.1)

 $N_{freq} = 1$ (as specified in TS36.133 clause 8.1.2.1.1)

 $N_{freq} * 30 \text{ s} = 30000 \text{ ms}$ (as specified in TS36.133 [4] clause 8.1.2.4.5.2.2.2 for when DRX cycle length > 40 ms)

TTI insertion uncertainty = 2 ms

DRX cycle length = 1280 ms

The overall delay measured when DRX cycle length is 1280 ms shall be less than a total of 44082 ms.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

8.9 E-UTRAN FDD - UTRAN TDD measurements

8.9.1 E-UTRAN FDD - UTRAN TDD event triggered reporting under fading propagation conditions

Editor's note: This section is incomplete. The following aspects are either missing or not yet determined:

- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined

8.9.1.1 Test purpose

To verify the UE's ability to make a correct reporting of an event under fading propagation conditions within the E-UTRA FDD - UTRA TDD cell search requirements.

8.9.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward that support UTRAN TDD..

8.9.1.3 Minimum requirement

The measurement reporting delay shall be less than $T_{identify, \, UTRA_TDD}$ in RRC_CONNECTED state.

When explicit neighbour list is provided and no DRX is used the UE shall be able to identify a new detectable cell belonging to the monitored set within

$$T_{\text{identify, UTRA_TDD}} = Max \left\{ 5000, T_{\text{basic identify UTRA_TDD}} \cdot \frac{480}{T_{\text{interl}}} \cdot N_{\textit{Freq}} \right\} \textit{ms}$$

where

 $T_{basic_identify_UTRA_TDD} = 800$ ms is the time period used in the inter RAT equation where the maximum allowed time for the UE to identify a new UTRA TDD cell is defined.

 $T_{Inter1} = 30$ ms. This is the minimum available time for inter-RAT measurement during 480 ms period

N_{Freq}: This is the number of UTRA carriers being monitored

If the UE does not require transmit gap to perform inter-RAT UTRA TDD measurements, the UE shall be able to identify a new detectable inter-RAT UTRA TDD cell belonging to the monitored set within 5000 ms.

A cell shall be considered detectable when

- P-CCPCH Ec/Io \geq -8 dB,
- DwPCH_Ec/Io \geq -5 dB.

When L3 filtering is used an additional delay can be expected.

When measurement gaps are scheduled for UTRA TDD inter RAT measurements the UE physical layer shall be capable of reporting measurements to higher layers with measurement accuracy as specified in Section 9.3 with measurement period given by

$$T_{\text{measurement UTRA_TDD}} = Max \left\{ T_{\text{Measurement_Period UTRA_TDD}}, T_{\text{basic measurement UTRA_TDD}} \cdot \frac{480}{T_{\text{interl}}} \cdot N_{\text{Freq}} \right\} ms$$

Where:

 $T_{Measurement_Period\ UTRA_TDD}$ = 480 ms is the period used for calculating the measurement period $T_{measurement_UTRA_TDD}$ for UTRA TDD P-CCPCH RSCP measurements.

 $T_{basic_identify_UTRA_TDD} = 800$ ms is the time period used in the inter RAT equation where the maximum allowed time for the UE to identify a new UTRA TDD cell is defined.

 $T_{basic_measurement_UTRA_TDD} = 50$ ms is the time period used in the equation for defining the measurement period for inter RAT P-CCPCH RSCP measurements.

 N_{freq} and T_{inter1} are defined in section 8.1.2.1.1

If the UE does not need measurement gaps to perform UTRA TDD measurements, the measurement period for UTRA TDD measurements is 480 ms.

The UE shall be capable of performing UTRA TDD P-CCPCH RSCP measurements for $X_{basic\ measurementUTRA_TDD}$ interfrequency cells per TDD frequency of the monitored set and the UE physical layer shall be capable of reporting measurements to higher layers with the measurement period of $T_{Measurement_UTRA_TDD}$. Where $X_{basic\ measurementUTRA_TDD} = 6$.

Reported measurements in event triggered measurement reports shall meet the requirements in TS 36.133 [4] clause 9.

The UE shall not send any event triggered measurement reports, as long as the reporting criteria is not fulfilled.

The measurement reporting delay is defined as the time between any event that will trigger a measurement report until the UE starts to transmit the measurement report over the Uu interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is twice the TTI of the uplink DCCH. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify,\,UTRA_TDD}$ defined in TS 36.133 [4] Section 8.1.2.4.3.1.1 When L3 filtering is used an additional delay can be expected.

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.4.3 and A.8.9.

8.9.1.4 Test description

8.9.1.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and faders and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.23.
- 2. The general test parameter settings are set up according to Table 8.9.1.4.1-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 8.9.1.4.3.
- 5. There is one E-UTRA FDD serving cell and one UTRA TDD cell specified in the test. Cell 1 (E-UTRA FDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 8.9.1.4.1-1: General test parameters for Event triggered reporting in fading propagation conditions

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference Measurement Channel R.0 FDD	As specified in section A.1.1
PCFICH/PDCCH/PHICH		DL Reference Measurement	As specified in section A.2.1
parameters		Channel R.6 FDD	
Active cell		Cell 1	E-UTRA FDD Cell 1
Neighbour cell		Cell 2	UTRA TDD Cell 2 is to be identified.
Gap Pattern Id		1	As specified in TS 36.133 section8.1.2.1. Measurement Gap Repetition Period = 80ms
Inter-RAT measurement		UTRA TDD PCCPCH RSCP	
quantity			
Threshold other system	dBm	-71	UTRA TDD PCCPCH RSCP threshold for event B1.
Hysteresis	dB	0	
CP length		Normal	
TimeToTrigger	dB	0	
Filter coefficient		0	L3 filtering is not used
DRX			OFF
T1	S	5	
T2	S	15	

8.9.1.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The test consists of two successive time periods, with time durations of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table's 8.9.1.5-1 and 8.9.1.5-2. Propagation conditions are set according to Annex B clause B.1.1 and B.2.2. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table's 8.9.1.5-1 and 8.9.1.5-2.
- 6. UE shall transmit a MeasurementReport message triggered by Event B1. If the overall delay measured from the beginning of time period T2 is less than 12880 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.
- 7. After the SS receive the MeasurementReport message in step 4) or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. SS shall change set cell 2 cell parameter id =(current cell 2 cell parameter id +4) mod 16.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A,
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

8.9.1.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.9.1.4.3-1: Common Exception messages for E-UTRAN FDD - UTRAN TDD event triggered reporting under fading propagation conditions

Default Message Contents			
Common contents of system information			
blocks exceptions			
Default RRC messages and information	Table H.3.1-1		
elements contents exceptions	Table H.3.1-4		
'	Table H.3.1-7		

Table 8.9.1.4.3-2: ReportConfigInterRAT-B1-UTRA: Additional E-UTRAN FDD - UTRAN TDD event triggered reporting under fading propagation conditions

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
ReportConfigInterRAT-B1-UTRA(UTRA-Thres) ::=			
SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventB1 SEQUENCE {			
b1-Threshold CHOICE {			
b1-ThresholdUTRA CHOICE {			
utra-RSCP	44	UTRA-Thres is	
		actual RSCP value	
		in dBm	
		UTRA-Thres + 115	
}			
}			
}			
}			
hysteresis	0		
}			
}			
]}			

Table 8.9.1.4.3-3: *MeasuredResults*: Additional E-UTRAN FDD - UTRAN TDD event triggered reporting under fading propagation conditions

Derivation Path: 36.331 clause 6.3.5 Information Element	Value/remark	Comment	Condition
MeasuredResults ::= SEQUENCE {			
measld	1		
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCellsCHOICE {			
measResultListUTRA	MeasResultListUTRA		
}			
}			

Table 8.9.1.4.3-4: *MeasResultListUTRA*: Additional E-UTRAN FDD - UTRAN TDD event triggered reporting under fading propagation conditions

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellIdphysicallCellIdentity CHOICE {			
tdd	UTRA-TDD-CellIdentity		
}			
measResult SEQUENCE {			
utra-RSCP	Set according to specific		
	test		
}			
}			

Table 8.9.1.4.3-5: CellGloballd-UTRA: Additional E-UTRAN FDD - UTRAN TDD event triggered reporting under fading propagation conditions

Derivation Path: 36.331 clause 6.3.4 Information Element	Value/remark	Comment	Condition
CellGlobalIdUTRA ::= SEQUENCE {			
plmn-Identity	PLMN-Identity		
cellIdentity		BIT STRING (SIZE	
		(28))	
}			

8.9.1.5 Test requirement

Tables 8.9.1.4.1-1, 8.9.1.5-1 and 8.9.1.5-2 define the primary level settings including test tolerances for E-UTRAN FDD - UTRAN TDD event triggered reporting under fading propagation conditions in synchronous cells test.

Table A.8.9.1.5-1: Cell specific test parameters for Event triggered reporting of UTRA TDD neighbours in fading propagation conditions (cell1)

Parameter	Unit Cell 1		1
		T1	T2
E-UTRA RF Channel		1	
Number			
BW _{channel}	MHz	10	
OCNG Patterns defined in		OP.1 F	FDD
D.1.1 (OP.1 FDD)			
PBCH_RA	dB		
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB	0	
PDCCH_RA	dB	U	
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA ^{Note 1}	dB		
OCNG_RB ^{Note 1}	dB		

dBm/15KHz	-98	3
dBm	-94+TT	-94+TT
dB	4+TT	4+TT
dBm	-94+	TT
dBm	-94+	TT
	ETU	70
	dBm dB dBm	dBm -94+TT dB 4+TT dBm -94+

Note 1: OCNG shall be used such that cell 1 is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Table A.8.9.1.5-2: Cell specific test parameters for Event triggered reporting of UTRA TDD neighbours in fading propagation conditions (cell2)

Unit	Cell 2			
	T1		Т	2
	0	DwPTS	0	DwPTS
		Cha	nnel1	
dB	-Infi	nity	-3+TT	
dB	-Infi	nity		0+TT
	-Infinity		-3+TT	
dB	-Infi	nity	9+TT	
dBm/1.	-70			
28				
MHz				
dB	-Infinity		-64+TT	
	Case 3 (NOTE2)			
	dB dB dB dBm/1. 28 MHz dB	dB -Infi dB -Infi dB -Infi dB -Infi dB -Infi dBm/1. 28 MHz dB -Infi	T1 0 DwPTS Cha dB -Infinity dB -Infinity dB -Infinity dBm/1. 28 MHz dB -Infinity Case 3	T1 T 0 DwPTS 0 Channel1 Channel1 dB -Infinity -3+TT dB -Infinity -3+TT dB -Infinity 9+TT dBm/1. -70 28 MHz dB -Infinity -64+TT

NOTE 1: The DPCH of the cell is located in a timeslot other than 0.

NOTE 2: Case 3 propagation conditions are specified in TS 25.102 Annex

The overall delays measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event B1 triggered measurement report to Cell 2.

The overall delays measured test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

 $Measurement \ reporting \ delay = T_{identify, \ UTRA_TDD}$

$$\mathbf{T}_{\text{identify, UTRA_TDD}} = Max \bigg\{ 5000, \mathbf{T}_{\text{basic identify UTRA_TDD}} \cdot \frac{480}{\mathbf{T}_{\text{interl}}} \cdot N_{\textit{Freq}} \bigg\} \textit{ms} \setminus \frac{1}{2} \left\{ \frac{1}{2} \left($

 $T_{\text{basic identify UTRA TDD}} = 800 \text{ ms}$

 $T_{Inter1} = 30 \text{ ms}$

 $N_{\text{Freq}} = 1$

TTI insertion uncertainty = 2 ms

The overall delays measured shall be less than a total of 12802 ms in this test case (note: this gives a total of 12800 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

8.10 E-UTRAN TDD - GSM measurements

8.10.1 E-UTRAN TDD - GSM event triggered reporting in AWGN

8.10.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event when doing inter-RAT (GSM) measurements. This test will partly verify the E-UTRAN TDD - GSM cell search requirements in TS 36.133[4] section 8.1.2.4.6.

8.10.1.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward that support GSM.

8.10.1.3 Minimum conformance requirements

The requirements in this section apply only to UE supporting E-UTRAN TDD and GSM.

Measurements on GSM cells can be requested with BSIC verified.

In RRC_CONNECTED state when a supported measurement gap pattern sequence according to TS 36.133[4] Table 8.1.2.1-1 is configured by E-UTRAN the UE shall continuously measure GSM cells, search for new GSM cells given in the monitored set and re-confirm the BSIC for already detected cells. During DRX periods the UE may use other periods of time outside the specified measurement gap patterns.

This measurement shall be based on measurement gaps allocated for GSM carrier RSSI measurement as described in TS 36.133[4] section 8.1.2.1. A UE supporting GSM measurements shall measure minimum number of 10 GSM carrier RSSI measurement samples ($N_{GSM\ carrier\ RSSI}$) per measurement gap. In RRC_CONNECTED state the measurement period, $T_{Measurement\ Period,\ GSM}$, for the GSM carrier RSSI measurement is $N_{freq}*480$ ms. The parameter N_{freq} is defined in TS 36.133[4] section 8.1.2.1.1.

The UE shall meet the measurement accuracy requirements stated for RXLEV in TS 45.008 [15], when the given measurement time allows the UE to take at least 3 GSM carrier RSSI samples per GSM carrier in the monitored set during the measurement period.

In case the UE is not able to acquire the required number of samples per GSM carrier during one measurement period, when at least 25% of the measurement gaps available for GSM monitoring purposes are used for GSM RSSI purposes the UE shall measure as many GSM carriers as possible during that measurement period using at least 3 samples per GSM carrier. The GSM carriers that were not measured during that measurement period shall be measured in the following measurement periods.

Measurements on a GSM cell can be requested with BSIC verified. The UE shall be able to report the GSM cells with BSIC verified for those cells where the verification of BSIC has been successful.

The procedure for BSIC verification on a GSM cell can be divided into the following two tasks:

- **Initial BSIC identification:** Includes searching for the BSIC and decoding the BSIC for the first time when there is no knowledge about the relative timing between the E-UTRAN TDD and GSM cells. The UE shall trigger the initial BSIC identification within the available measurement gap pattern sequence. The requirements for BSIC re-confirmation can be found in TS 36.133[4] section 8.1.2.4.5.1.2.1.
- **BSIC re-confirmation:** Tracking and decoding the BSIC of a GSM cell after initial BSIC identification is performed. The UE shall trigger the BSIC re-confirmation within the available measurement gap pattern. The requirements for BSIC re-confirmation can be found in TS 36.133[4] section 8.1.2.4.5.1.2.2.

If the network requests measurements on a GSM cell, the UE shall behave as follows:

- The UE shall perform GSM carrier RSSI measurements according to TS 36.133[4] section 8.1.2.4.5.1 when a measurement gap pattern sequence is activated.
- The UE shall perform measurement reporting as defined in TS 36.331 [5].

- 474
- The UE shall perform BSIC identification if BSIC verified measurements are activated by RRC. The UE shall use the most recently available GSM carrier RSSI measurement results for arranging GSM cells in signal strength order for performing BSIC identification.
- The UE shall perform BSIC re-confirmation on all the GSM cells that have been successfully identified.
- The UE shall perform all configured event evaluation for event-triggered reporting after the BSIC has been verified for a GSM cell. The UE shall use the most recently available GSM carrier RSSI measurement results in event evaluation and event-triggered reporting.
- Event-triggered and periodic reports shall be triggered according to TS 36.331 [5].

The BSIC of a GSM cell is considered to be "verified" if the UE has decoded the SCH of the BCCH carrier and identified the BSIC at least one time (initial BSIC identification). Once a GSM cell has been identified the BSIC shall be re-confirmed at least once every $8*T_{\text{re-confirm},GSM}$ seconds. Otherwise the BSIC of the GSM cell is considered as "non-verified". If a measurement gap pattern sequence is deactivated by the network after BSIC has been identified or verified, the UE shall consider the BSIC as non-verified.

 $T_{identify,GSM}$ indicates the maximum time allowed for the UE to decode the unknown BSIC of the GSM cell in one GSM BCCH carrier in the initial BSIC identification procedure.

 $T_{\text{re-confirm,GSM}}$ indicates the maximum time allowed for the re-confirmation of the BSIC of one GSM cell in the BSIC re-confirmation procedure.

The UE shall be able to decode a BSIC within a measurement gap when the time difference between the middle of the received GSM synchronisation burst at the UE and the middle of the effective measurement gap is within the limits specified in table 8.10.1.3-1.

Table 8.10.1.3-1: The gap length and maximum time difference for BSIC verification

Gap length [ms]	Maximum time difference [μs]
6	± 2350 µs

The UE shall be able to perform BSIC verification at levels down to the reference sensitivity level or reference interference levels as specified in TS 45.005 [16].

This measurement shall be based on the measurement gaps used for Initial BSIC identification as described in TS 36.133[4] section 8.1.2.4.5.1.2

The UE shall continuously attempt to decode the BSIC of SCH on the BCCH carrier of the 8 strongest BCCH carriers of the GSM cells indicated in the Inter-RAT cell info list. The UE shall give priority for BSIC decoding attempts in decreasing signal strength order to BCCH carriers with unknown BSIC. The strongest BCCH carrier is defined as the BCCH carrier having the highest measured GSM carrier RSSI value.

If the BSIC of the GSM BCCH carrier has been successfully decoded the UE shall immediately continue BSIC identification with the next GSM BCCH carrier, in signal strength order, with unknown BSIC. The GSM cell for which the BSIC has been successfully identified shall be moved to the BSIC re-confirmation procedure.

If the UE has not successfully decoded the BSIC of the GSM BCCH carrier within $T_{identify,GSM}$ ms, the UE shall abort the BSIC identification attempts for that GSM BCCH carrier. The UE shall continue to try to perform BSIC identification of the next GSM BCCH carrier in signal strength order. The GSM BCCH carrier for which the BSIC identification failed shall not be re-considered for BSIC identification until BSIC identification attempts have been made for all the rest of the 8 strongest GSM BCCH carriers in the monitored set with unknown BSIC.

 $T_{identify,GSM}$ values are given for a set of reference gap patterns in table 8.10.1.3-2. The requirements in the table represent the time required to guarantee at least two attempts to decode the BSIC for one GSM BCCH carrier.

Table 8.10.1.3-2

Number	T _{identify,g}	_{sm} (ms)	T _{reconfirm,gsm} (ms)	
of carriers other than GSM	40ms gap configuration (ID 0)	80ms gap configuration (ID 1)	40ms gap configuration (ID 0)	80ms gap configuration (ID 1)
0	2160	5280	1920	5040
1	5280	21760	5040	17280
2	5280	31680	5040	29280
3	19440	No requirement	13320	No requirement
4	31680	No requirement	29280	No requirement
5	31680	No requirement	29280	No requirement

The UE shall maintain the timing information of up to 8 identified GSM cells. Initial timing information is obtained from the initial BSIC identification. The timing information shall be updated every time the BSIC is decoded.

For each measurement gap used for GSM BSIC reconfirmation as described in TS 36.133[4] section 8.1.2.4.5.1.2, the UE shall attempt to decode the BSIC falling within the measurement gap according to table 8.10. 1.3 - 2. If more than one BSIC can be decoded within the same measurement gap, priority shall be given to the least recently decoded BSIC.

If the UE fails to decode the BSIC after two successive attempts or if the UE has not been able to re-confirm the BSIC for a GSM cell within $T_{\text{re-confirm,GSM}}$ seconds, the UE shall abort the BSIC re-confirmation attempts for that GSM cell. The GSM cell shall be treated as a new GSM cell with unidentified BSIC and the GSM cell shall be moved to the initial BSIC identification procedure, see TS 36.133[4] section 8.1.2.4.5.1.2.1.

Reported measurements in periodically triggered measurement reports shall meet the requirements in section TS 36.331[5].

Reported measurements in event triggered measurement reports shall meet the requirements in section TS 36.331[5].

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH.

The event triggered reporting delay requirement is valid when the UE for each GSM carrier in the monitored set can take the required number of samples during the measurement period $T_{Measurement\ Period,\ GSM}$ (see TS 36.133[4] section 8.1.2.4.5.1).

The event triggered measurement reporting delay for a GSM cell with verified BSIC , measured without L3 filtering shall be less than $2*T_{Measurement\ Period,\ GSM}$, where $T_{Measurement\ Period,\ GSM}$ is defined in TS 36.133[4] section 8.1.2.4.5.1. When L3 filtering is used an additional delay can be expected.

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements in TS 36.133[4] section 9.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in TS 36.133[4] section 8.1.2.4.5.1.4 Event Triggered Reporting.

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.4.5.1 and A8.10.1

8.10.1.4 Test description

8.10.1.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and faders and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14 for UEs that support receive diversity.
- 2. The general test parameter settings are set up according to Table 8.10.1.4.1-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 8.10.1.4.3.
- 5. There is one E-UTRA TDD serving cell and one GSM cell specified in the test. Cell 1 (E-UTRA TDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 8.10.1.4.1-1: General test parameters for E-UTRAN TDD-GSM event triggered reporting in AWGN

Parameter	Unit	Value	Comment
PDSCH parameters (E-UTRAN TDD)		DL Reference Measurement Channel R.0 TDD	As specified in section A.1.2.
PCFICH/PDCCH/PHICH parameters (E-UTRAN TDD)		DL Reference Measurement Channel R.6 TDD	As specified in section A.2.2.
Gap Pattern Id		0	As specified in 3GPP TS 36.133[4] section 8.1.2.1.
Active cell		Cell 1	Cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		Cell 2	Cell 2 is on Absolute RF Channel Number 1 (GSM cell)
Special subframe configuration		6	As specified in table 4.2-1 in 3GPP TS 36.211
Uplink-downlink configuration		1	As specified in table 4.2-2 in 3GPP TS 36.211
CP length		Normal	Applicable to cell 1
E-UTRA RF Channel Number		1	One E-UTRA TDD carrier frequency is used.
E-UTRA Channel Bandwidth (BWchannel)	MHz	10	
Inter-RAT (GSM) measurement quantity		GSM Carrier RSSI	
b1-Threshold-GERAN	dBm	-80	GSM Carrier RSSI threshold for event B1.
Hysteresis	dB	0	
Time To Trigger	ms	0	
Filter coefficient		0	L3 filtering is not used.
DRX		OFF	
Monitored GSM cell list size		6 GSM neighbours including ARFCN 1	List of GSM cells provided before T2 starts.
T1	s	5	
T2	S	5	

8.10.1.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The test consists of two successive time periods, with time durations of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table's 8.10.1.5-1 and 8.10.1.5-2. Propagation conditions are set according to Annex B clauses B.1.1. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table's 8.10.1.5-1 and 8.10.1.5-2.

- 6. UE shall transmit a MeasurementReport message triggered by Event B1. If the overall delay measured from the beginning of time period T2 is less than 3122 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.
- 7. After the SS receive the MeasurementReport message in step 6) or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. SS shall set a different BSIC on Cell 2, as the previous timing information of Cell 2 is invalid in the UE for the next iteration of the test procedure loop.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A, or
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

8.10.1.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.10.1.4.3-1: Common Exception messages for E-UTRAN TDD-GSM event triggered reporting under fading propagation conditions

Default Message Contents			
Common contents of system information			
blocks exceptions			
Default RRC messages and information	Table H.3.1-1		
elements contents exceptions	Table H.3.1-7		

Table 8.10.1.4.3-2: SystemInformationBlockType7: Additional E-UTRAN TDD - GSM event triggered reporting under fading propagation conditions

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-3 SystemInformationBlockType7				
Information Element	Value/remark	Comment	Condition	
commonInfo SEQUENCE {				
p-MaxGERAN	33 (33 dBm)		GSM 400 &	
			GSM 900 &	
			GSM 850 &	
			GSM 700	
	30 (30 dBm)		DCS 1800	
			& PCS 1900	
}				

Table 8.10.1.4.3-3: *MeasConfig-DEFAULT*: Additional E-UTRAN TDD - GSM event triggered reporting under fading propagation conditions

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.	6.6-1 MeasConfig-DEFAULT:		
Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModList SEQUENCE (SIZE	2 entry		
(1maxObjectId)) OF SEQUENCE {			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f3		
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA-	E-UTRA Cell	
	GENERIC(f3)		
}			
}			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f13		
measObject CHOICE {			
measObjectGERAN	MeasObjectGERAN-	GERAN Cell	
	GENERIC(f13)		
}			
}			
}			
reportConfigToRemoveList	Not present		
reportConfigToAddModList SEQUENCE (SIZE	1 entry		
(1maxReportConfigId))OF SEQUENCE {			
reportConfigId	idReportConfig-B1		
reportConfig	ReportConfigInterRAT-		
	B1-GERAN		
}			
measIdToRemoveList	Not present		
measIdToAddModList SEQUENCE (SIZE	1 entry		
(1maxMeasId)) of SEQUENCE {			
measld	1		
measObjectId	IdMeasObject-f13		
reportConfigld	idReportConfig-B1		
}			
quantityConfig	QuantityConfig-DEFAULT		GERAN
measGapConfig	MeasGapConfig-GP1		
s-Measure	Not present		
preRegistrationInfoHRPD	Not present		
speedStatePars	Not present		
}			

Table 8.10.1.4.3-4: ReportConfigInterRAT-B1-GERAN: Additional E-UTRAN FDD - GSM Event triggered reporting in AWGN

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-7A ReportConfigInterRAT-B1-GERAN(GERAN-Thres)			Thres)
Information Element	Value/remark	Comment	Condition
ReportConfigInterRAT-B1-GERAN(GERAN-Thres)			
::= SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventIdeventide CHOICE {			
eventB1 SEQUENCE {			
b1-Threshold CHOICE {			
b1-ThresholdGERAN	30 (-80 dBm)	-80 is actual value in dBm (30 - 110 dBm)	
}			
}			
}			
hysteresis	0 (0dB)		
}			
}			

Table 8.10.1.4.3-5: *MeasResults*: Additional E-UTRAN TDD - GSM event triggered reporting under fading propagation conditions

Derivation Path: 36.331 clause 6.3.5 Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1		
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListGERAN	MeasResultListGERAN		
}			
}			

Table 8.10.1.4.3-6: *MeasResultListGERAN*: Additional E-UTRAN TDD - GSM event triggered reporting under fading propagation conditions

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListGERAN ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
carrierFreq	CarrierFreqGERAN		
physCellId SEQUENCE {			
networkColourCode		BIT STRING(SIZE(3))	
baseStationColourCode		BIT STRING(SIZE(3))	
}			
measResult SEQUENCE {			
rssi		Set according to specific test	
}			
}			

Table 8.10.1.4.3-7: CarrierFreqGERAN: Additional E-UTRAN TDD - GSM event triggered reporting under fading propagation conditions

Derivation Path: 36.331 clause 6.3.4			
Information Element	Value/remark	Comment	Condition
CarrierFreqGERAN ::= SEQUENCE {			
arfcn		INTEGER	
		(01023)	
bandIndicator		ENUMERATED	
		{dcs1800,	
		pcs1900}	
}			

8.10.1.5 Test requirement

The test parameters are given in Tables 8.10.1.4.1-1, 8.10.1.5-1 and 8.10.1.5-2 below. In the measurement control information it is indicated to the UE that event-triggered reporting with Event B1 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 2.

Table 8.10.1.5-1: Cell specific test parameters for E-UTRAN TDD (cell # 1) for event triggered reporting of GSM cell in AWGN

Parameter	Unit	Cell 1		
		T1	T2	
E-UTRA RF Channel Number		1		
BW _{channel}	MHz	10		
OCNG Pattern defined in D.2.1		OP.1 T	DD	
(OP.1 TDD)				
PBCH_RA	dB			
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB	0		
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA ^{Note 1}	dB			
OCNG_RB ^{Note 1}	dB			
$\hat{\mathbf{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	dB	4	4	
$N_{oc}^{ m Note 3}$	dBm/15 kHz	-98		
\hat{E}_s/N_{oc}	dB	4	4	
RSRP Note 4	dBm/15 kHz	-94	-94	
SCH_RP	dBm/15 kHz	-94	-94	
Propagation Condition		AWG	SN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 3: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{ac} to be

Note 4: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.10.1.5-2: Cell specific test parameters for GSM (cell # 2) for event triggered reporting of GSM cell in AWGN

Parameter	Unit	Cell 2	
		T1	T2
Absolute RF Channel Number		ARFNC 1	
RXLEV	dBm	-Infinity	-75
GSM BSIC		N/A	Valid

The UE shall send one Event B1 triggered measurement report including the valid BSIC of cell # 2, with a measurement reporting delay less than 3120 ms from the beginning of time period T2.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE 1: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

NOTE 2: The delay for GSM cell identification with BSIC verified is equal to 3120 ms, which is the sum of the event triggered measurement reporting delay and the initial BSIC identification delay.

The event triggered measurement reporting delay = $2*T_{Measurement\ Period,\ GSM} = 2*480ms = 960ms$.

Initial BSIC identification delay = 2160 ms.

The overall delays measured shall be less than a total of 3122 ms in this test case (note: this gives 960 ms for measurement reporting delay plus 2160 for BSIC identification and plus 2 ms for TTI insertion uncertainty).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

8.10.2 E-UTRAN TDD-GSM event triggered reporting when DRX is used in AWGN

8.10.2.1 Test purpose

The purpose of these tests is to verify that the UE makes correct reporting of an event in DRX. These tests will partly verify the E-UTRAN TDD-GSM cell search requirements when DRX is used in TS 36.133[4] section 8.1.2.4.6.

8.10.2.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward that support GSM.

8.10.2.3 Minimum conformance requirements

The requirements in this section apply only to UE supporting E-UTRAN TDD and GSM.

Measurements on GSM cells can be requested with BSIC verified.

In RRC_CONNECTED state when a supported measurement gap pattern sequence according to TS 36.133[4] Table 8.1.2.1-1 is configured by E-UTRAN the UE shall continuously measure GSM cells, search for new GSM cells given in the monitored set and re-confirm the BSIC for already detected cells. During DRX periods the UE may use other periods of time outside the specified measurement gap patterns. The UE is not required to make measurements of GSM cells during DRX periods if a measurement gap pattern has not been configured.

This measurement shall be based on measurement gaps allocated for GSM carrier RSSI measurement as described in TS 36.133[4] section 8.1.2.1. A UE supporting GSM measurements shall measure minimum number of 10 GSM carrier RSSI measurement samples ($N_{GSM\ carrier\ RSSI}$) per DRX cycle. In RRC_CONNECTED state the measurement period, $T_{Measurement\ Period,\ GSM}$, for the GSM carrier RSSI measurement is shown in table 8.10.2.3-1. The parameter N_{freq} is defined in TS 36.133[4] section 8.1.2.1.1.

Table 8.10.2.3-1: GSM measurement period for large DRX

DRX cycle length (s)	T _{measure,GSM} (s) (DRX cycles)	
≤0.04	Non DRX Requirements are applicable	
0.04 <drx-cycle≤ 0.08<="" td=""><td>Note (6*N_{freq})</td></drx-cycle≤>	Note (6*N _{freq})	
0.08 <drx-cycle≤ 2.56<="" td=""><td colspan="2">Note (5*N_{freq})</td></drx-cycle≤>	Note (5*N _{freq})	
Note: Time depends upon the DRX cycle in use		

The UE shall meet the measurement accuracy requirements stated for RXLEV in TS 45.008 [15], when the given measurement time allows the UE to take at least 3 GSM carrier RSSI samples per GSM carrier in the monitored set during the measurement period.

In case the UE is not able to acquire the required number of samples per GSM carrier during one measurement period, the UE shall measure as many GSM carriers as possible during that measurement period using at least 3 samples per GSM carrier. The GSM carriers that were not measured during that measurement period shall be measured in the following measurement periods.

Measurements on a GSM cell can be requested with BSIC verified. The UE shall be able to report the GSM cells with BSIC verified for those cells where the verification of BSIC has been successful.

The procedure for BSIC verification on a GSM cell can be divided into the following two tasks:

- **Initial BSIC identification:** Includes searching for the BSIC and decoding the BSIC for the first time when there is no knowledge about the relative timing between the E-UTRAN FDD and GSM cells.
- **BSIC re-confirmation:** Tracking and decoding the BSIC of a GSM cell after initial BSIC identification is performed. The UE shall trigger the BSIC re-confirmation within the available measurement gap pattern

If the network requests measurements on a GSM cell, the UE shall behave as follows:

- The UE shall perform GSM carrier RSSI measurements according to TS 36.133[4] section 8.1.2.4.5.2.1 when a measurement gap pattern sequence is activated.
- The UE shall perform measurement reporting as defined in TS 36.331 [5].
- The UE shall perform BSIC identification. The UE shall use the most recently available GSM carrier RSSI measurement results for arranging GSM cells in signal strength order for performing BSIC identification.
- The UE shall perform BSIC re-confirmation on all the GSM cells that have been successfully identified.
- The UE shall perform all configured event evaluation for event-triggered reporting after the BSIC has been verified for a GSM cell. The UE shall use the most recently available GSM carrier RSSI measurement results in event evaluation and event-triggered reporting.
- Event-triggered and periodic reports shall be triggered according to TS 36.331 [5].

The BSIC of a GSM cell is considered to be "verified" if the UE has decoded the SCH of the BCCH carrier and identified the BSIC at least one time (initial BSIC identification). Once a GSM cell has been identified the BSIC shall be re-confirmed at least once every 30 seconds. Otherwise the BSIC of the GSM cell is considered as "non-verified".

The UE shall be able to perform BSIC verification at levels down to the reference sensitivity level or reference interference levels as specified in TS 45.005 [16].

This measurement shall be made on GSM cells that are requested with BSIC verified.

For DRX cycle length \leq 40 ms, the initial GSM BSIC identification requirements corresponding to the non DRX requirements as specified in section TS 36.133 [4] 8.1.2.4.5.1.2.1 shall apply.

For DRX cycle length > 40 ms, the UE shall make at least one attempt every $N_{\rm freq}*30s$ to decode the BSIC of SCH on the BCCH carrier of the 8 strongest BCCH carriers of the GSM cells indicated in the Inter-RAT cell info list. If the UE has not successfully decoded the BSIC of the GSM BCCH carrier within $N_{\rm freq}*60$ s, the UE shall abort the BSIC identification attempts for that GSM BCCH carrier. The UE shall give priority for BSIC decoding attempts in decreasing signal strength order to BCCH carriers with unknown BSIC. The strongest BCCH carrier is defined as the BCCH carrier having the highest measured GSM carrier RSSI value. The parameter $N_{\rm freq}$ is defined in TS 36.133 [4] section 8.1.2.1.1.

If the BSIC of the GSM BCCH carrier has been successfully decoded the UE shall continue BSIC identification with the next GSM BCCH carrier, in signal strength order, with unknown BSIC. The GSM cell for which the BSIC has been successfully identified shall be moved to the BSIC re-confirmation procedure.

The UE shall maintain the timing information of up to 8 identified GSM cells. Initial timing information is obtained from the initial BSIC identification. The timing information shall be updated every time the BSIC is decoded.

For DRX cycle length \leq 40 ms, the GSM BSIC re-conformation requirements corresponding to the non DRX requirements as specified in TS 36.133 [4] section 8.1.2.4.5.1.2.2 shall apply.

For DRX cycle length > 40 ms, at least every N_{freq} *30 seconds, the UE shall attempt to decode the BSIC of each identified GSM cell.

If the UE fails to decode the BSIC after two successive attempts or if the UE has not been able to re-confirm the BSIC for a GSM cell within $N_{\rm freq}$ *60 seconds, the UE shall abort the BSIC re-confirmation attempts for that GSM cell. The GSM cell shall be treated as a new GSM cell with unidentified BSIC and the GSM cell shall be moved to the initial BSIC identification procedure, see TS 36.133 [4] section 8.1.2.4.5.2.2.1. The parameter $N_{\rm freq}$ is defined in TS 36.133 [4] section 8.1.2.1.1.

Reported measurements in periodically triggered measurement reports shall meet the requirements in section 36.331[5].

Reported measurements in event triggered measurement reports shall meet the requirements in section 36.331[5].

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH.

The event triggered reporting delay requirement is valid when the UE for each GSM carrier in the monitored set can take the required number of samples during the measurement period $T_{Measurement\ Period,\ GSM}$ (see TS 36.133 [4] section 8.1.2.4.5.2.1).

The event triggered measurement reporting delay for a GSM cell with verified BSIC , measured without L3 filtering shall be less than $2*T_{Measurement\ Period,\ GSM}$, where $T_{Measurement\ Period,\ GSM}$ is defined in TS 36.133 [4] section 8.1.2.4.5.2.1. When L3 filtering is used an additional delay can be expected.

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements in TS 36.133[4] section 9.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in TS 36.133[4] section 8.1.2.4.5.2.4 Event Triggered Reporting.

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.4.5.2 and A8.10.2

8.10.2.4 Test description

8.10.2.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and faders and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14 for UEs that support receive diversity.
- 2. The general test parameter settings are set up according to Table 8.10.2.4.1-1.
- 3. Propagation conditions are set according to Annex B clauses B.0.
- 4. Message contents are defined in clause 8.10.2.4.3.
- 5. In these tests, there are two cells, one E-UTRAN cell and one GSM cell, and gap pattern configuration # 0 as defined in TS 36.133 [4] Table 8.1.2.1-1 is provided. Cell 1 (E-UTRA TDD cell) is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

Table 8.10.2.4.1-1: General test parameters for E-UTRAN TDD-GSM event triggered reporting when DRX is used in AWGN

Parameter	Unit	Test 1	Test 2	Comment
		Value		
PDSCH parameters (E-		DL Reference Measurement		As specified in section A.1.2. Note that UE
UTRAN TDD)		Channel R.0 TDD)	may only be allocated at On Duration
PCFICH/PDCCH/PHICH		DL Reference Me	asurement	As specified in section A.2.2.
parameters (E-UTRAN TDD)		Channel R.6 TDD)	
Gap Pattern Id		()	As specified in 3GPP TS 36.133 section 8.1.2.1.
Active cell		Се	II 1	Cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		Се	II 2	Cell 2 is on Absolute RF Channel Number 1 (GSM cell)
Special subframe configuration		(3	As specified in table 4.2-1 in TS 36.211.
Uplink-downlink		1		As specified in 3GPP TS 36.211 section
configuration				4.2 Table 4.2-2
CP length		Nor	mal	Applicable to cell 1
E-UTRA RF Channel		1		One E-UTRA TDD carrier frequency is
Number				used.
E-UTRA Channel Bandwidth (BW _{channel})	MHz	10		
Inter-RAT (GSM) measurement quantity		GSM Car	rier RSSI	
B1-Threshold-GERAN	dBm	-8	30	GSM Carrier RSSI threshold for event B1.
Hysteresis	dB	()	
TimeToTrigger	S	()	
Filter coefficient		()	L3 filtering is not used
PRACH configuration		4	1	As specified in table 5.7.1-2 in TS 36.211
Access Barring Information	-	Not Sent		No additional delays in random access procedure.
DRX		ON		DRX related parameters are defined in Table 8.10.2.5-2
Monitored GSM cell list size		6 GSM neighbours including ARFCN 1		List of GSM cells provided before T2 starts.
T1	S	5		
T2	S	5	45	

8.10.2.4.2 Test procedure

In Test 1 UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle. In Test 2 the uplink time alignment is not maintained and UE needs to use RACH to obtain UL allocation for measurement reporting.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 is used. The tests consist of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 2.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table's 8.10.2.5-1 and 8.10.2.5-4. Propagation conditions are set according to Annex B clauses B.1.1. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table's 8.10.2.5-1 and 8.10.2.5-4. T2 starts.
- 6. UE shall transmit a MeasurementReport message triggered by Event B1. If the overall delay measured from the beginning of time period T2 is less than 3162 ms for Test1 or less than 44082 ms for Test2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.
- 7. After the SS receive the MeasurementReport message in step 6) or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. SS shall set a different BSIC on Cell 2, as the previous timing information of Cell 2 is invalid in the UE for next iteration of the test procedure loop.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A, or
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.
- 11. Repeat step 1-10 for each sub-test in Table 8.10.2.4.1-1 as appropriate.

8.10.2.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.10.2.4.3-1: Common Exception messages for E-UTRAN TDD-GSM event triggered reporting when DRX is used in AWGN

Default Message Contents		
Common contents of system information		
blocks exceptions		
Default RRC messages and information	Table H.3.1-7	
elements contents exceptions	Table H.3.7-1	
·	Table H.3.7-2	
	Table H.3.7-3	

Table 8.10.2.4.3-2: SystemInformationBlockType7: Additional E-UTRAN TDD-GSM event triggered reporting when DRX is used in AWGN

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-3 SystemInformationBlockType7				
Information Element	Value/remark	Comment	Condition	
commonInfo SEQUENCE {				
p-MaxGERAN	33 (33 dBm)		GSM 400 &	
			GSM 900 &	
			GSM 850 &	
			GSM 700	
	30 (30 dBm)		DCS 1800	
			& PCS 1900	
}				

Table 8.10.2.4.3-3: *PRACH-ConfigSIB-DEFAULT*: Additional E-UTRAN TDD-GSM event triggered reporting when DRX is used in AWGN

Derivation Path: 36.508 clause 4.6.3 Table 4.6.3-7a PRACH-ConfigSIB-DEFAULT				
Information Element	Value/remark	Comment	Condition	
PRACH-ConfigSIB-DEFAULT ::= SEQUENCE {				
prach-ConfigInfo SEQUENCE {				
prach-ConfigIndex	4		TDD	
}				
}				

Table 8.10.2.4.3-4: RRCConnectionReconfiguration: Additional E-UTRAN FDD - GSM Event triggered reporting in AWGN

Derivation Path: TS 36.508 [7] clause 4.6.1, Table 4.6.1-8 RRCConnectionReconfiguration				
Information Element	Value/remark	Comment	Condition	
RRCConnectionReconfiguration ::= SEQUENCE {				
rrc-TransactionIdentifier	RRC-			
	TransactionIdentifier-DL			
criticalExtensions CHOICE {				
c1 CHOICE{				
rrcConnectionReconfiguration-r8 SEQUENCE {				
measConfig	MeasConfig -DEFAULT			
radioResourceConfigDedicated	RadioResourceConfigDed icated-HO			
}				
}				
}				
}				

Table 8.10.2.4.3-5: *MeasConfig-DEFAULT*: Additional E-UTRAN TDD-GSM event triggered reporting when DRX is used in AWGN

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4	.6.6-1 MeasConfig-DEFAULT:		
Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModList SEQUENCE (SIZE	2 entry		
(1maxObjectId)) OF SEQUENCE {			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f3		
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA- GENERIC(f3)	E-UTRA Cell	
}			
}			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f13		
measObject CHOICE {			
measObjectGERAN	MeasObjectGERAN- GENERIC(f13)	GERAN Cell	
}			
}			
}			
reportConfigToRemoveList	Not present		
reportConfigToAddModList SEQUENCE (SIZE (1maxReportConfigId))OF SEQUENCE {	1 entry		
reportConfigId	idReportConfig-B1		
reportConfig	ReportConfigInterRAT- B1-GERAN		
}			
measIdToRemoveList	Not present		
measIdToAddModList SEQUENCE (SIZE (1maxMeasId)) of SEQUENCE {	1 entry		
measld	1		
measObjectId	IdMeasObject-f13		
reportConfigld	idReportConfig-B1		
}			
quantityConfig	QuantityConfig-DEFAULT		GERAN
measGapConfig	MeasGapConfig-GP1		
s-Measure	Not present		
preRegistrationInfoHRPD	Not present		
speedStatePars	Not present		
}	·		

Table 8.10.2.4.3-6: ReportConfigInterRAT-B1-GERAN: Additional E-UTRAN TDD-GSM event triggered reporting when DRX is used in AWGN

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
ReportConfigInterRAT-B1-GERAN(GERAN-Thres) ::=			
SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventB1 SEQUENCE {			
b1-Threshold CHOICE {			
b1-ThresholdGERAN	30	GERAN-Thres is actual value in dBm	
}			
}			
}			
hysteresis	0	The actual value is IE value * 0.5 dB INTEGER(030)	
timeToTrigger	ms0		
}			
}			
}			

Table 8.10.2.4.3-7: SchedulingRequest-Config-DEFAULT: Additional E-UTRAN TDD-GSM event triggered reporting when DRX is used in AWGN

Information Element	Value/remark	Comment	Condition
SchedulingRequest-Config-DEFAULT ::= CHOICE {			
setup SEQUENCE {			
sr-PUCCH-ResourceIndex	41	Channel- bandwidth- dependent parameter	
sr-ConfigIndex	0		
dsr-TransMax	n4		
}			
}			

Table 8.10.2.4.3-8: *MeasResults*: Additional E-UTRAN TDD-GSM event triggered reporting when DRX is used in AWGN

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1		
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListGERAN	MeasResultListGERAN		
}			
}			

Table 8.10.2.4.3-9: *MeasResultListGERAN*: Additional E-UTRAN TDD-GSM event triggered reporting when DRX is used in AWGN

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListGERAN ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
carrierFreq	CarrierFreqGERAN		
physCellId SEQUENCE {			
networkColourCode		BIT STRING(SIZE(3))	
baseStationColourCode		BIT STRING(SIZE(3))	
}			
measResult SEQUENCE {			
rssi		Set according to specific test	
}			
]			

Table 8.10.2.4.3-10: CarrierFreqGERAN: Additional E-UTRAN TDD-GSM event triggered reporting when DRX is used in AWGN

Information Element	Value/remark	Comment	Condition
CarrierFreqGERAN ::= SEQUENCE {			
arfcn		INTEGER	
		(01023)	
bandIndicator		ENUMERATED	
		{dcs1800,	
		pcs1900}	

8.10.2.5 Test requirement

Cell specific test parameters are given in Table 8.10.2.5-1 for E-UTRAN and in Table A.8.10.2.5-4 for GSM. DRX configuration for Test1 and Test2 are given in Table 8.10.2.5-2 and time alignment timer and scheduling request related parameters in Table 8.10.2.5-3.

In Test 1 UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle. In Test 2 the uplink time alignment is not maintained and UE needs to use RACH to obtain UL allocation for measurement reporting.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 is used. The tests consist of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 2.

Table 8.10.2.5-1: Cell specific test parameters for E-UTRAN TDD (cell #1) event triggered reporting of GSM cell when DRX is used in AWGN

Parameter	Unit	Cell 1		
		T1	T2	
E-UTRA RF Channel Number		1		
BW _{channel}	MHz	10		
OCNG Patterns defined in		OP.1 T	DD	
D.2.1 (OP.1 TDD)				
PBCH_RA	dB			
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB	0		
PDCCH_RA	dB	0		
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA ^{Note 1}	dB			
OCNG_RB ^{Note 1}	dB			
	dB	4	4	
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$				
$N_{oc}^{ m Note 2}$	dBm/15 kHz	-98		
RSRP Note 3	dBm/15 kHz	-94	-94	
SCH_RP	dBm/15 kHz	-94	-94	
\hat{E}_s/N_{oc}	dB	4	4	
Propagation Condition		AWG	SN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 3: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.10.2.5-2: drx-Configuration to be used in E-UTRAN TDD-GSM event triggered reporting when DRX is used in AWGN

Field	Test1 Value	Test2 Value	Comment		
onDurationTimer	psf1	psf1			
drx-InactivityTimer	psf1	psf1			
drx-RetransmissionTimer	psf1	psf1			
longDRX-CycleStartOffset	sf40	sf1280			
shortDRX	Disable	Disable			
Note: For further information see section 6.3.2 in 3GPP TS 36.331.					

Table 8.10.2.5-3: *TimeAlignmentTimer* and *sr-ConfigIndex* -Configuration to be used in E-UTRAN TDD-GSM event triggered reporting when DRX is used in AWGN

Field	Test1	Test2	Comment
rieid	Value	Value	
TimeAlignmentTimer	sf500	sf500	For further information see section 6.3.2 in 3GPP TS 36.331.
sr-ConfigIndex	0	0	For further information see section 6.3.2 in 3GPP TS 36.331 and section10.1 in 3GPP TS 36.213.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Table 8.10.2.5-4: Cell specific test parameters for GSM (cell # 2) for event triggered reporting of GSM cell when DRX is used in AWGN

Parameter	Unit	Cell 2		
		T1	T2	
Absolute RF Channel Number		AF	RFNC 1	
RXLEV	dBm	-Infinity	-75	
GSM BSIC		N/A	Valid	

In Test 1 when DRX cycle length = 40 ms is used, the overall delay measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event B1 triggered measurement report to Cell 2 on PUSCH. In Test 2 when DRX cycle length = 1280 ms is used, the overall delay measured is defined as the time from the beginning of time period T2, to the moment the UE starts to send preambles on the PRACH for Scheduling Request (SR) to obtain allocation to send the measurement report to Cell 2 on PUSCH.

For both tests:

The overall delay may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

NOTE 1: The actual overall delays measured in the test may be up to one DRX cycle higher than the measurement reporting delays above because UE is allowed to delay the initiation of the measurement reporting procedure to the next until the Active Time.

NOTE 2: In order to calculate the rate of correct events the system simulator shall verify that it has received correct Event B1 measurement report

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The overall delay measured when DRX cycle length is 40 ms test requirement is expressed as:

 $Overall\ delay\ measured = 2*T_{Measurement\ Period,\ GSM} + T_{identify,\ GSM} + TTI\ insertion\ uncertainty + DRX\ cycle\ length$

 $T_{\text{Measurement Period, GSM}} = 480 \text{ ms}$ (as specified in table 8.1.2.4.5.2.1-1 of TS36.133 [4] clause 8.1.2.4.5.2.1)

 $T_{identify, GSM} = 2160 \text{ ms}$ (as specified in table 8.1.2.4.5.1.2.1-1 of TS36.133 [4] clause 8.1.2.4.5.1.2.1)

TTI insertion uncertainty = 2 ms

DRX cycle length = 40 ms

The overall delay measured when DRX cycle length is 40 ms shall be less than a total of 3162 ms.

The overall delay measured when DRX cycle length is 1280 ms test requirement is expressed as:

 $Overall\ delay\ measured = 2*T_{Measurement\ Period,\ GSM} + N_{freq}*30s + TTI\ insertion\ uncertainty + DRX\ cycle\ length$

 $T_{Measurement\ Period,\ GSM} = 6400\ ms$ (as specified in table 8.1.2.4.5.2.1-1 of TS36.133 [4] clause 8.1.2.4.5.2.1)

 $N_{freq} = 1$ (as specified in TS36.133 clause 8.1.2.1.1)

 $N_{freq} * 30 \text{ s} = 30000 \text{ ms}$ (as specified in TS36.133 [4] clause 8.1.2.4.5.2.2.2 for when DRX cycle length > 40 ms)

TTI insertion uncertainty = 2 ms

DRX cycle length = 1280 ms

The overall delay measured when DRX cycle length is 1280 ms shall be less than a total of 44082 ms.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

8.11 Monitoring of Multiple Layers

8.11.1 Multiple E-UTRAN FDD-FDD Inter-frequency event triggered reporting under fading propagation conditions

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The Test system uncertainties and test tolerances applicable to this test are undefined
- Statistical testing of cell re-selection delay performance requirements are undefined

8.11.1.1 Test purpose

To verify that the UE makes correct reporting of multiple events under fading propagation conditions within the E-UTRA FDD inter-frequency cell search requirements.

8.11.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

8.11.1.3 Minimum conformance requirements

When measurement gaps are scheduled the UE shall be able to identify a new FDD inter-frequency within $T_{Identify_Inter}$ according to the following expression:

$$T_{\text{Identify_Inter}} = T_{\text{Basic_Identify_Inter}} \cdot \frac{480}{T_{\text{Inter}}} \cdot N_{freq} \quad ms$$

Where:

 $T_{Basic_Identify_Inter} = 480$ ms. It is the time period used in the inter frequency equation where the maximum allowed time for the UE to identify a new FDD inter-frequency cell is defined.

 N_{freq} is defined in TS 36.133 [4] section 8.1.2.1.1 and T_{interl} is defined in TS 36.133 [4] section 8.1.2.1

A cell shall be considered detectable provided following conditions are fulfilled:

- RSRP_{dRm} \geq -125 dBm and for Bands 1, 4, 6, 10, 11, 18, 19, 21 and RSRP £s/Iot \geq -4 dB,
- RSRP $|_{dBm} \ge -124 dBm$ for Bands 9 and RSRP $\hat{E}s/Iot \ge -4 dB$,
- RSRP $_{dBm} \ge -123$ dBm for Bands 2, 5, 7, 17 and RSRP \hat{E} s/Iot ≥ -4 dB,
- RSRP_{|dBm}≥ -122 dBm for Bands 3, 8, 12, 13, 14, 20 and RSRP \hat{E} s/Iot ≥ -4 dB,
- other RSRP related side conditions given in Section 9.1 are fulfilled,
- SCH_RP|_{dBm} \geq -125 dBm for Bands 1, 4, 6, 10, 11, 18, 19, 21 and SCH Ês/Iot \geq -4 dB,
- SCH_RP $|_{dBm} \ge -124 dBm$ for Band 9 and SCH Ês/Iot $\ge -4 dB$,
- SCH_RP $|_{dBm} \ge -123$ dBm for Bands 2, 5, 7, 17 and SCH Ês/Iot ≥ -4 dB,
- SCH_RP $|_{dBm}$ ≥ -122 dBm for Bands 3, 8, 12, 13, 14, 20 and SCH Ês /Iot ≥ -4 dB.

When measurement gaps are scheduled for FDD inter frequency measurements the UE physical layer shall be capable of reporting measurements to higher layers with measurement accuracy as specified in sub-clause 9.1.3 with measurement period given by Table 8.11.1.3-1.

Table 8.11.1.3-1: RSRP measurement period and measurement bandwidth

Configuration	Physical Layer Measurement period:	Measurement bandwidth [RB]
	T _{Measurement_Period_Inter_FDD} [ms]	
0	480 x N _{freq}	6
1 (Note)	240 x N _{freq}	50
Note: This configura	tion is optional	

The UE shall be capable of performing RSRP and RSRQ measurements of at least 4 inter-frequency cells per FDD inter-frequency for up to 3 FDD inter-frequencies and the UE physical layer shall be capable of reporting RSRP and RSRQ measurements to higher layers with the measurement period defined in Table 8.11.1.3-1.

Reported measurements contained in event triggered measurement reports shall meet the requirements in TS 36.133 [4] clause 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than T _{identify_inter} defined in TS 36.133 [4] clause 8.1.2.3.1.1. When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period Tidentify_intra defined in TS 36.133 [4] section 8.1.2.2.1.1 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event, the event triggered measurement reporting delay shall be less than TMeasurement_Period Intra provided the timing to that cell has not changed more than \pm 50 Ts and the L3 filter has not been used. When L3 filtering is used an additional delay can be expected

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.3.1 and A.8.11.1.

8.11.1.4 Test description

8.11.1.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise source to the UE antenna connectors as shown in TS 36.508 [7] Annex A Figure A. 19.
- 2. The general test parameter settings are set up according to Table 8.11.1.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 8.11.1.4.3.
- 5. In this test, there are three E-UTRA cells, cell1, cell2 and cell3, all on different frequencies. Cell 1 (EUTRA FDD cell on RF channel number 1) is the cell used for registration with the power level set according to Annex C.0 and C.1 for this test.

Table 8.11.1.4.1-1: General test parameters for Inter-frequency E-UTRA FDD – E-UTRA FDD and E-UTRA FDD cell search under fading

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference Measurement Channel R.0 FDD	As specified in section A.1.1
PCFICH/PDCCH/PHICH parameters		DL Reference Measurement Channel R.6 FDD	As specified in section A.2.1
E-UTRA RF Channel Number		1, 2, 3	Three FDD carrier frequencies are used.
Channel Bandwidth (BW _{channel})	MHz	10	
Active cell		Cell 1	Cell 1 is on RF channel number 1
Neighbour cell		Cell 2 and cell 3	Cell 2 is on RF channel number 2 and cell 3 is on RF channel number 3
Gap Pattern Id		0	As specified in 3GPP TS 36.133 section 8.1.2.1.
A3-Offset	dB	-6	
Hysteresis	dB	0	
CP length		Normal	
TimeToTrigger	S	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF
Time offset between E- UTRAN FDD cells		3 ms	Asynchronous cells
T1	S	5	
T2	S	10	

8.11.1.4.2 Test procedure

This test scenario comprised of 3 E-UTRA FDD cells operating on different frequencies. In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 2 or cell 3. At T1 the UE is camped on to Cell 1.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 8.11.1.5-1. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 8.11.1.5-1.
- 6. UE shall transmit MeasurementReport messages triggered by event A3 for cell 2 and cell 3, respectively. If the measurement reporting delay for cell 2 from the beginning of the time period T2 is less than 7682 ms the number of successful tests is increased by one. If the UE fails to report the event within the measurement reporting delay requirement then the number of failure tests is increased by one. If the measurement reporting delay for cell 3 from the beginning of time period T2 is less than 7682 ms the number of successful tests is increased by one. If the UE fails to report the event within the measurement reporting delay requirement then the number of failure tests is increased by one.
- 7. After the SS receives the MeasurementReport messages in step 6 or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE

is in State 3A according to TS 36.508 [7] clause 4.5.3A, or

- switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

8.11.1.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.11.1.4.3-1: Common Exception messages

Default Message Contents					
Common contents of system information					
blocks exceptions					
Default RRC messages and information	Table H.3.1-1				
elements contents exceptions	Table H.3.1-7				

Table 8.11.1.4.3-2: *MeasConfig-DEFAULT*: Additional Multiple E-UTRAN FDD-FDD inter frequency event triggered reporting under fading propagation conditions

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4	.6.6-1 MeasConfig-DEFAULT:		
Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModList SEQUENCE (SIZE	3 entry		
(1maxObjectId)) OF SEQUENCE {			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f1		
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA-	serving frequency	
	GENERIC(f1)		
}			
}			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f2		
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA-	inter frequency	
,	GENERÍC(f2)		
}	` '		
}			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f3		
measObject CHOICE {	,		
MeasObjectEUTRA	MeasObjectEUTRA-	inter frequency	
	GENERIC(f3)		
}			
}			
}			
reportConfigToRemoveList	Not present		
reportConfigToAddModList SEQUENCE (SIZE	1 entry		
(1maxReportConfigId))OF SEQUENCE {			
reportConfigId	idReportConfig-A3		
reportConfig	ReportConfigEUTRA-A3		
}	g_0g_0		
measIdToRemoveList	Not present		
measIdToAddModList SEQUENCE (SIZE	2 entry		
(1maxMeasId)) of SEQUENCE {	2 511119		
measIdToAddMod ::= SEQUENCE {			
measId	1		
measObjectId	IdMeasObject-f2		
reportConfigld	idReportConfig-A3		
\	larceporteering 7.0		
measIdToAddMod ::= SEQUENCE {			
measid	2		
measObjectId	IdMeasObject-f3		
reportConfigId	idReportConfig-A3		
}	iditoportooniig-Ao		
\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\			
quantityConfig	QuantityConfig-		<u> </u>
quantityOoting	DEFAULT		
measGapConfig	MeasGapConfig-GP1		
s-Measure	Not present		
preRegistrationInfoHRPD	Not present		1
speedStatePars	Not present		+
specusialer als	INUL PLESCIIL		
		J	

Table 8.11.1.4.3-3: ReportConfigEUTRA-A3: Additional Multiple E-UTRAN FDD-FDD inter frequency event triggered reporting under fading propagation conditions

Derivation Path: TS 36.508 [7] clause 4.6.6, Table	4.6.6-6 ReportConfigEUTRA	-A3	
Information Element	Value/remark	Comment	Condition
ReportConfigEUTRA ::= SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset	-12 (-6 dB)	-6 is actual value in	
		dB (-6 * 0.5 dB)	
}			
}			
Hysteresis	0 (0 dB)	0 is actual value in	
		dB (0 * 0.5 dB)	
timeToTrigger	0 (0 ms)		
}			
}			

Table 8.11.1.4.3-4: *MeasResults*: Additional Multiple E-UTRAN FDD-FDD inter frequency event triggered reporting under fading propagation conditions

Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	[1]		
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
}			
}			

Table 8.11.1.4.3-5: *MeasResultListEUTRA*: Additional Multiple E-UTRAN FDD-FDD inter frequency event triggered reporting under fading propagation conditions

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListEUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF MeasResultEUTRA {			
MeasResultEUTRA ::= SEQUENCE {			
physCellId	PhysicalCellIdentity		
measResult SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
}			

8.11.1.5 Test requirement

Table 8.11.1.4.1-1 and 8.11.1.5-1 define the primary level settings including test tolerances for three E-UTRAN FDD cells.

Table 8.11.1.5-1: Cell specific test parameters for Inter-frequency E-UTRA FDD – E-UTRA FDD and E-UTRA FDD cell search under fading conditions

Parameter	Unit	Ce	Cell 1		Cell 2		Cell 3	
		T1	T2	T1	T2	T1	T2	
E-UTRA RF Channel Number		1		2		3		
BW _{channel}	MHz	1	10	1	0		10	
OCNG Patterns defined in D.1.1 (OP.1 FDD) and in D.1.2 (OP.2 FDD)		OP.1	I FDD	OP.2	? FDD	OP.:	2 FDD	
PBCH_RA	dB							
PBCH_RB	dB							
PSS_RA	dB							
SSS_RA	dB							
PCFICH_RB	dB							
PHICH_RA	dB							
PHICH_RB	dB		•		•		•	
PDCCH_RA	dB		0	0		0		
PDCCH_RB	dB							
PDSCH_RA	dB							
PDSCH_RB	dB							
OCNG_RA ^{Note 1}	dB							
OCNG_RB ^{Note}	dB							
$N_{oc}^{ m Note 3}$	dBm/15 kHz			-9	8			
RSRP Note 4	dBm/15	-98 + TT	-98 + TT	-Infinity	-95 + TT	-Infinity	-95 + TT	
	kHz			·				
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	dB	0 + TT	0 + TT	-Infinity	3 + TT	-Infinity	3 + TT	
SCH_RP Note 4	dBm/15 kHz	-98 + TT	-98 + TT	-Infinity	-95 + TT	-Infinity	-95 + TT	
\hat{E}_s/N_{oc}	dB	0 + TT	0 + TT	-Infinity	3 + TT	-Infinity	3 + TT	
Propagation Condition			AWGN		Ü70		U70	
Note 1: OCNG sha	all be used	I be used such that both cells are fully allocated and a constant total transmitted						

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 3: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{ac} to be fulfilled.

Note 4: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send one Event A3 triggered measurement report for cell 2 with a measurement reporting delay less than 7682 ms from the beginning of time period T2.

The UE shall send one Event A3 triggered measurement report for cell 3 with a measurement reporting delay less than 7682 ms from the beginning of time period T3.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

The overall delays measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event A3 triggered measurement report to Cell 2.

The overall delays measured test requirement for Event A3 is expressed as:

Overall delays measured = Measurement reporting delay + TTI insertion uncertainty

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

Measurement reporting delay = $T_{identify\ inter}$

$$T_{\text{Identify_Inter}} = T_{\text{Basic_Identify_Inter}} \cdot \frac{480}{T_{\text{Interl}}} \cdot N_{\text{freq}} \quad ms$$

Where:

 $T_{Basic_Identify_Inter} = 480$ ms. It is the time period used in the inter frequency equation where the maximum allowed time for the UE to identify a new FDD inter-frequency cell is defined.

 T_{inter1} =60ms

 $N_{freq}=2$.

TTI insertion uncertainty = 2 ms

Therefore, the overall delays measured shall be less than a total of 7682ms in this test case (note: this gives a total of 7680 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

8.11.2 E-UTRAN TDD - E-UTRAN TDD and E-UTRAN TDD Interfrequency event triggered reporting under fading propagation conditions

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined.
- Statistical testing of cell re-selection delay performance requirements are undefined

8.11.2.1 Test purpose

To verify that the UE makes correct reporting of two event when doing inter frequency measurements.

8.11.2.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

8.11.2.3 Minimum conformance requirements

When measurement gaps are scheduled the UE shall be able to identify a new TDD inter-frequency within $T_{Identify_Inter}$ according to the following expression:

$$T_{\text{Identify_Inter}} = T_{\text{Basic_Identify_Inter}} \cdot \frac{480}{T_{\text{Inter}}} \cdot N_{\text{freq}} \quad ms$$

Where:

T_{Basic_Identify_Inter} = 480 ms. It is the time period used in the inter frequency equation where the maximum allowed time for the UE to identify a new TDD inter-frequency cell is defined.

T_{inter1} is defined in TS 36.133 [4] section 8.1.2.1

 N_{freq} is defined in TS 36.133 [4] section 8.1.2.1.1.

A cell shall be considered detectable provided following conditions are fulfilled:

- RSRP|_{dBm} ≥ -125 dBm and for Bands 33, 34, 35, 36, 37, 38, 39, 40, 42, 43 and RSRP Ês/Iot ≥ -4 dB,
- RSRP $_{dBm} \ge -124$ dBm and for Band 41 and RSRP $\hat{E}s/Iot \ge -4$ dB,
- other RSRP related side conditions given in TS 36.133 [4] Section 9.1 are fulfilled,
- SCH_RP| $_{dBm} \ge$ -125 dBm for Bands 33, 34, 35, 36, 37, 38, 39, 40, 42, 43 and SCH $\hat{E}s/Iot \ge$ -4 dB
- SCH_RP $|_{dBm} \ge -124 \text{ dBm for Band 41 and SCH } \hat{E}s/Iot \ge -4 \text{ dB}.$

When measurement gaps are scheduled for TDD inter frequency measurements the UE physical layer shall be capable of reporting measurements to higher layers with measurement accuracy as specified in TS 36.133 sub-clause 9.1.3 with measurement period ($T_{\text{Measurement_Period_TDD_Inter}$) given by table 8.4.4.1.3-1.

Table 8.4.1.3-1: T_{Measurement_Period_TDD_Inter} for different configurations

Configuration	Measurement bandwidth	Number of UL/DL sub-frames per half frame (5 ms)		DwPTS		T _{Measurement_Period_TDD_I}
	[RB]	DL	UL	Normal CP	Extended CP	
0	6	2	2	$19760 \cdot T_{\rm s}$	$20480 \cdot T_{\rm s}$	480 x N _{freq}
1 (Note 1)	50	2	2	$19760 \cdot T_{\rm s}$	20480·T _s	240 x N _{freq}
	onfiguration is option					

Where:

T_{inter1} is defined in TS 36.133 [4] section 8.1.2.1

 N_{freq} is defined in TS 36.133 [4] section 8.1.2.1.1.

The UE shall be capable of performing RSRP and RSRQ measurements of at least 4 inter-frequency cells per TDD inter-frequency and the UE physical layer shall be capable of reporting RSRP and RSRQ measurements to higher layers with the measurement period $T_{\text{Measurement_Period_TDD_Inter.}}$

Reported measurements contained in event triggered measurement reports shall meet the requirements in TS 36.133 [4] clause 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times \text{TTI}_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than T _{Identify_Inter} defined in TS 36.133 [4] clause 8.1.2.3.2.1. When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{identify_intra}$ defined in TS 36.133 [4] section 8.1.2.2.1.1 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event, the event triggered measurement reporting delay shall be less than $T_{Measurement_Period\ Intra}$ provided the timing to that cell has not changed more than \pm 50 Ts and the L3 filter has not been used. When L3 filtering is used an additional delay can be expected

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.3.2.

8.11.2.4 Test description

8.11.2.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise source to the UE antenna connectors as shown in TS 36.508 [7] Annex A Figure A.19.
- 2. The general test parameter settings are set up according to Table 8.11.2.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 8.11.2.4.3.
- 5. There are three E-UTRA cells, cell1, cell2 and cell3, all on different frequencies in the test. Cell 1 (EUTRA TDD cell on RF channel number 1) is the cell used for registration with the power level set according to Annex C.0 and C.1 for this test.

Table 8.11.2.4.1-1: General test parameters for E-UTRAN TDD - E-UTRAN TDD and E-UTRAN TDD Inter-frequency event triggered reporting under fading propagation conditions

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference Measurement Channel R.0 TDD	As specified in section A.1.2
PCFICH/PDCCH/PHICH parameters		DL Reference Measurement Channel R.6 TDD	As specified in section A.2.2
Special subframe configuration		6	As specified in table 4.2-1 in TS 36.211. The same configuration in both cells
Uplink-downlink configuration		1	As specified in 3GPP TS 36.211 section 4.2 Table 4.2-2
E-UTRA RF Channel Number		1, 2, 3	Three TDD carrier frequencies are used.
Channel Bandwidth (BW _{channel})	MHz	10	
Active cell		Cell 1	Cell 1 is on RF channel number 1
Neighbor cells		Cell 2 and Cell 3	Cell 2 and 3 are on RF channel numbers 2 and 3 respectively
Gap Pattern Id		0	As specified in 3GPP TS 36.133 section 8.1.2.1.
A3-Offset	dB	-6	
Hysteresis	dB	0	
CP length		Normal	
TimeToTrigger	S	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF
Time offset between cells		3 μs	Synchronous cells 3μs or 92*Ts
T1	S	5	
T2	S	10	

8.11.2.4.2 Test procedure

This test scenario comprised of 3 E-UTRA TDD cells operating on different frequency. The test consists of two successive time periods, with time duration T1 and T2. In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. At T1 the UE is camped on to Cell 1.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 8.11.2.5-1 and Table 8.11.2.5-2. T1 starts.

- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 8.11.2.5-1 and Table 8.11.2.5-2.
- 6. UE shall transmit two MeasurementReport message triggered by two events A3 for cell 2 and cell 3, respectively. If the overall delay measured from the beginning of the time period T2 is less than 7682 ms for event A3 for cell 2 report then the number of successful tests is increased by one. If the UE fails to report the event A3 for cell 2 within the overall delays measured requirement then the number of failure tests is increased by one. If the overall delay measured from the beginning of time period T2 is less than 7682ms for event A3 for cell 3 report then the number of successful tests is increased by one. If the UE fails to report the event A3 for cell 3 within the overall delays measured requirement then the number of failure tests is increased by one.
- 7. After the SS receives the MeasurementReport messages in step 6 or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A, or
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

8.11.2.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.11.2.4.3-1: Common Exception messages

Default Message Contents					
Common contents of system information					
blocks exceptions					
Default RRC messages and information	Table H.3.1-1				
elements contents exceptions					

Table 8.11.2.4.3-2: *MeasConfig-DEFAULT*: Additional E-UTRAN TDD-TDD inter frequency event triggered reporting under fading propagation conditions in asynchronous cells test requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-1 MeasConfig-DEFAULT			
Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModList	Not present		
reportConfigToRemoveList	Not present		
reportConfigToAddModList	ReportConfigEUTRA-A3		
measIdToRemoveList	Not present		
measIdToAddModList	Not present		
quantityConfig	Not present		
measGapConfig	MeasGapConfig-GP1		
s-Measure	Not present		
preRegistrationInfoHRPD	Not present		
speedStatePars	Not present		
}			

Table 8.11.2.4.3-3: ReportConfigEUTRA-A3: Additional E-UTRAN TDD-TDD inter frequency event triggered reporting under fading propagation conditions in asynchronous cells test requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-6 ReportConfigEUTRA-A3			
Information Element	Value/remark	Comment	Condition
ReportConfigEUTRA ::= SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset	-12 (-6 dB)	-6 is actual value in dB (-6 * 0.5 dB)	
}			
}			
Hysteresis	0 (0 dB)	0 is actual value in dB (0 * 0.5 dB)	
timeToTrigger	0 (0 ms)		
}			
}			

Table 8.11.2.4.3-4: *MeasResults*: Additional E-UTRAN TDD-TDD inter frequency event triggered reporting under fading propagation conditions in asynchronous cells test requirement

Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	[1]		
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
}			
}			

Table 8.11.2.4.3-5: MeasResultListEUTRA: Additional E-UTRAN TDD-TDD inter frequency event triggered reporting under fading propagation conditions in asynchronous cells test requirement

Derivation Path: 36.331 clause 6.3.5				
Information Element	Value/remark	Comment	Condition	
MeasResultListEUTRA ::= SEQUENCE (SIZE				
(1maxCellReport)) OF MeasResultEUTRA {				
MeasResultEUTRA ::= SEQUENCE {				
physCellId	PhysicalCellIdentity			
cgi-Info SEQUENCE {				
cellgloballd-EUTRA	GlobalCellId-EUTRA			
tac-IDrackingAreaCode	TrackingAreaCode			
plmn-IdentityList	Not present			
}				
measResult SEQUENCE {				
rsrpResult	Not present			
rsrqResult	Not present			
}				
}				

8.11.2.5 Test requirement

Tables 8.11.2.5-1 and 8.11.2.5-2 define the primary level settings including test tolerances for three E-UTRAN TDD cells.

Table A.8.11.2.5-1: Cell specific test parameters for E-UTRAN TDD - E-UTRAN TDD and E-UTRAN TDD Inter-frequency event triggered reporting under fading propagation conditions cells

Doromotor	l lmit	Ce	ell 1	Cell 2		Cell 3	
Parameter	Unit	T1	T2	T1	T2	T1	T2
E-UTRA RF Channel			1	2		3	
Number		•					
BW _{channel}	MHz	1	10	10)	10)
OCNG Patterns defined		OP.1 TDD OP.2 TDD					
in D.2.1 (OP.1 TDD)				OP.2 TDD		OP.2 TDD	
and in D.2.2 (OP.2							
TDD)	ID.						
PBCH_RA	dB						
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PCFICH_RB	dB						
PHICH_RA	dB			0		0	
PHICH_RB	dB		0				
PDCCH_RA	dB						
PDCCH_RB	dB						
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA ^{Note 1}	dB						
OCNG_RB ^{Note 1}	dB						
$N_{oc}^{ m Note 3}$	dBm/15 kHz			-9	8		
RSRP Note 4	dBm/15 kHz	-98	-98	-inf	-95	-inf	-95
\hat{E}_{s}/I_{ot}	dB	0+TT	0+TT	-inf	3+TT	-inf	3+TT
SCH_RP Note 4	dBm/15 kHz	-98	-98	-inf	-95	-inf	-95
\hat{E}_s/N_{oc}	dB	0+TT	0+TT	-inf	3+TT	-inf	3+TT
Propagation Condition			/GN	ETU		ETU	

Note 1: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 3: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 4: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement for Event A3 is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_inter}$

$$T_{\text{Identify_Inter}} = T_{\text{Basic_Identify_Inter}} \cdot \frac{480}{T_{\text{Interl}}} \cdot N_{\text{freq}} \quad \textit{ms}$$

Where:

 $T_{Basic_Identify_Inter} = 480$ ms. It is the time period used in the inter frequency equation where the maximum allowed time for the UE to identify a new TDD inter-frequency cell is defined.

 T_{inter1} =60ms

 $N_{freq}=2$.

TTI insertion uncertainty = 2 ms

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 7682ms from the beginning of time period T2 (note: this gives a total of 7680 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

8.11.3 E-UTRAN FDD-FDD Inter-frequency and UTRAN FDD event triggered reporting under fading propagation conditions

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The Test system uncertainties and test tolerances applicable to this test are undefined
- Statistical testing of cell re-selection delay performance requirements are undefined

8.11.3.1 Test purpose

To verify that the UE makes correct reporting of an event when doing inter frequency and UTRAN FDD measurements under fading propagation conditions.

8.11.3.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

8.11.3.3 Minimum conformance requirements

When measurement gaps are scheduled the UE shall be able to identify a new detectable FDD inter-frequency cell within $T_{Identify_Inter}$ according to the following expression:

$$\mathbf{T}_{\text{Identify_Inter}} = \mathbf{T}_{\text{Basic_Identify_Inter}} \cdot \frac{480}{\mathbf{T}_{\text{Inter1}}} \cdot N_{\textit{freq}} \quad \textit{ms}$$

Where:

 $T_{Basic_Identify_Inter} = 480$ ms. It is the time period used in the inter frequency equation where the maximum allowed time for the UE to identify a new FDD inter-frequency cell is defined.

 N_{freq} is defined in section 8.1.2.1.1 and T_{inter1} is defined in section 8.1.2.1

A cell shall be considered detectable provided following conditions are fulfilled:

- RSRP $|_{dBm} \ge -125 \text{ dBm}$ and for Bands 1, 4, 6, 10, 11, 18, 19, 21 and RSRP $\hat{E}s/Iot \ge -4 \text{ dB}$,
- RSRP $|_{dBm} \ge -124 \text{ dBm for Bands 9 and RSRP } \hat{E}_{s}/Iot \ge -4 \text{ dB}$,
- RSRP $_{\text{dBm}} \ge -123 \text{ dBm}$ for Bands 2, 5, 7, 17 and RSRP $\hat{\text{E}}$ s/Iot $\ge -4 \text{ dB}$,
- RSRP|_{dBm} \ge -122 dBm for Bands 3, 8, 12, 13, 14, 20 and RSRP Ês/Iot \ge -4 dB,
- other RSRP related side conditions given in Section 9.1 are fulfilled,
- SCH_RP|_{dBm}≥ -125 dBm for Bands 1, 4, 6, 10, 11, 18, 19, 21 and SCH Ês/Iot ≥ -4 dB,
- SCH_RP $|_{dBm} \ge -124 dBm$ for Band 9 and SCH Ês/Iot $\ge -4 dB$,
- SCH_RP $|_{dBm} \ge -123$ dBm for Bands 2, 5, 7, 17 and SCH Ês/Iot ≥ -4 dB,
- SCH_RP $|_{dBm} \ge$ -122 dBm for Bands 3, 8, 12, 13, 14, 20 and SCH Ês /Iot \ge -4 dB.

When measurement gaps are scheduled for FDD inter frequency measurements the UE physical layer shall be capable of reporting measurements to higher layers with measurement accuracy as specified in sub-clause 9.1.3 with measurement period given by Table 8.11.3.3-1.

Table 8.11.3.3-1: RSRP measurement period and measurement bandwidth

Configuration	Physical Layer Measurement period:	Measurement bandwidth [RB]
	T _{Measurement_Period_Inter_FDD} [ms]	
0	480 x N _{freq}	6
1 (Note)	240 x N _{freq}	50
Note: This configura	tion is optional	

The UE shall be capable of performing RSRP and RSRQ measurements of at least 4 inter-frequency cells per FDD inter-frequency for up to 3 FDD inter-frequencies and the UE physical layer shall be capable of reporting RSRP and RSRQ measurements to higher layers with the measurement period defined in Table 8.11.3.3-1.

Reported measurements contained in event triggered measurement reports shall meet the requirements in TS 36.133 [4] clause 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than T $_{identify_inter}$ defined in TS 36.133 [4] clause 8.1.2.3.1.1. When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period Tidentify_intra defined in TS 36.133 [4] section 8.1.2.2.1.1 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event, the event triggered measurement reporting delay shall be less than TMeasurement_Period Intra provided the timing to that cell has not changed more than \pm 50 Ts and the L3 filter has not been used. When L3 filtering is used an additional delay can be expected.

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.3.1 and A.8.11.3.

When explicit neighbour list is provided and no DRX is used the UE shall be able to identify a new detectable FDD UTRA cell belonging to the monitored set within.

$$\mathbf{T}_{\text{identify, UTRA_FDD}} = \mathbf{T}_{\text{basic_identify_UTRA_FDD}} \cdot \frac{480}{\mathbf{T}_{\text{inter1}}} \cdot N_{\textit{Freq}} \quad \textit{ms}$$

A cell shall be considered detectable when

- CPICH Ec/Io \geq -20 dB,
- SCH_Ec/Io ≥ -17 dB for at least one channel tap and SCH_Ec/Ior is equally divided between primary synchronisation code and secondary synchronisation code. When L3 filtering is used an additional delay can be expected.

When measurement gaps are scheduled for UTRA FDD inter RAT measurements the UE physical layer shall be capable of reporting measurements to higher layers with measurement accuracy as specified in TS 36.133 [4] section 9.2 with measurement period given by

$$T_{\text{measurement_UTRA_FDD}} = Max \left\{ T_{\text{Measurement_Period UTRA_FDD}}, T_{\text{basic_measurement_UTRA_FDD}} \cdot \frac{480}{T_{\text{interl}}} \cdot N_{\text{Freq}} \right\} ms$$

If the UE does not need measurement gaps to perform UTRA FDD measurements, the measurement period for UTRA FDD measurements is 480 ms.

The UE shall be capable of performing UTRA FDD CPICH measurements for $X_{basic\ measurementUTRA_FDD}$ inter-frequency cells per FDD frequency and the UE physical layer shall be capable of reporting measurements to higher layers with the measurement period of $T_{Measurement\ UTRA\ FDD}$.

 $X_{\text{basic measurement UTRA FDD}} = 6$

 $T_{\text{Measurement_Period UTRA_FDD}} = 480 \text{ ms.}$ The period used for calculating the measurement period $T_{\text{measurement_UTRA_FDD}}$ for UTRA FDD CPICH measurements.

 $T_{basic_identify_UTRA_FDD} = 300$ ms. This is the time period used in the inter RAT equation in TS 36.133 [4] section 8.1.2.4.1.1.1 where the maximum allowed time for the UE to identify a new UTRA FDD cell is defined.

 $T_{basic_identify_enhanced_UTRA_FDD} = 60$ ms. This is the time period used in the inter RAT equation in section 8.1.2.4.1.1.1a where the maximum allowed time for the UE to identify a new UTRA FDD cell is defined.

 $T_{basic_measurement_UTRA_FDD} = 50$ ms. This is the time period used in the equation for defining the measurement period for inter RAT CPICH measurements.

 N_{free} is defined in TS 36.133 [4] section 8.1.2.1.1 and T_{interl} is defined in TS 36.133 [4] section 8.1.2.1

Reported measurements in periodically triggered measurement reports shall meet the requirements in TS 36.133 [4] section 9.

Reported measurements in event triggered measurement reports shall meet the requirements in TS 36.133 [4] section 9.

The UE shall not send any event triggered measurement reports, as long as the reporting criteria is not fulfilled.

The measurement reporting delay is defined as the time between any event that will trigger a measurement report until the UE starts to transmit the measurement report over the Uu interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is twice the TTI of the uplink DCCH. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify,\ UTRA_FDD}$ defined in TS 36.133 [4] section 8.1.2.4.1.1.1 for the minimum requirements or $T_{identify,\ enhanced_UTRA_FDD}$ defined in TS 36.133 [4] section 8.1.2.4.1.1.1a for the enhanced requirements When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{identify,\; UTRA_FDD}$ defined in TS 36.133 [4] section 8.1.2.4.1.1.1 for the minimum requirements or $T_{identify,\; enhanced_UTRA_FDD}$ defined in TS 36.133 [4] section 8.1.2.4.1.1.1a for the enhanced requirements and then enters or leaves the reporting range, the event triggered measurement reporting delay shall be less than $T_{measurement_UTRA_FDD}$ defined in TS 36.133 [4] section 8.1.2.4.1.1.2 provided the timing to that cell has not changed more than \pm 32 chips while measurement gap has not been available and the L3 filter has not been used. When L3 filtering is used an additional delay can be expected.

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements in TS 36.133 [4] section 9.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in TS 36.133 [4] section 8.1.2.4.1.1.4 Event Triggered Reporting.

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.4.1 and A.8.11.3.

8.11.3.4 Test description

8.11.3.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise source to the UE antenna connectors as shown in TS 36.508 [7] Annex A Figure A.24.
- 2. The general test parameter settings are set up according to Table 8.11.3.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 8.11.3.4.3.
- 5. In this test, there are two cells on different carrier frequencies and one cell on UTRAN carrier frequency. Cell 1 (EUTRA FDD cell on RF channel number 1) is the cell used for registration with the power level set according to Annex C.0 and C.1 for this test.

Table 8.11.3.4.1-1: General test parameters for Combined inter-frequency and UTRAN event triggered reporting in fading propagation conditions

Value

Parameter	Unit	Value	Comment
PDSCH parameters (E-UTRAN FDD)		DL Reference Measurement Channel R.0 FDD	As specified in section A.1.1
PCFICH/PDCCH/PHICH parameters		DL Reference Measurement	As specified in section A.2.1
(E-UTRAN FDD)		Channel R.6 FDD	
Gap Pattern Id		0	As specified in 3GPP TS 36.133 section 8.1.2.1.
Active cell		Cell 1	Cell 1 is on E-UTRA RF channel number 1.
Neighbour cells		Cell 2, 3	Cell 2 is on E-UTRA RF channel number 2.
			Cell 3 is on UTRA RF channel number 1.
CP length		Normal	Applicable to cell 1
E-UTRA RF Channel Number		1, 2	Two FDD carrier frequencies are used.
E-UTRA Channel Bandwidth	MHz	10	
(BW _{channel})			
UTRA RF Channel Number		1	One UTRA FDD carrier frequency is used.
E-UTRAN FDD measurement		RSRP	
quantity			
Inter-RAT (UTRA FDD)		CPICH Ec/N0	
measurement quantity			
A3-Offset	dB	-6	
b2-Threshold-E-UTRA	dB	-88	RSRP threshold for event B2.
b2-Threshold-UTRA	dB	-18	CPICH Ec/N0 threshold for event B2.
Hysteresis	dB	0	
Time To Trigger	ms	0	
Filter coefficient		0	L3 filtering is not used.
DRX		OFF	
Monitored UTRA FDD cell list size		12	UTRA cells on UTRA RF channel 1 provided in the cell list.
Time offset between cells		3 ms	Asynchronous cells
T1	S	5	
T2	S	8	

8.11.3.4.2 Test procedure

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 and B2 is used. The test consists of two successive time periods, with time duration of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 2 and cell 3. At T1 the UE is camped on to Cell 1.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 8.11.3.5-1. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 8.11.3.5-1.

- 6. UE shall transmit MeasurementReport messages triggered by event A3 and B2. If the measurement reporting delay for event A3 from the beginning of the time period T2 is less than 7682 ms the number of successful tests is increased by one. If the UE fails to report the event within the measurement reporting delay requirement then the number of failure tests is increased by one. If the measurement reporting delay for event B2 from the beginning of time period T2 is less than 4802 ms the number of successful tests is increased by one. If the UE fails to report the event within the measurement reporting delay requirement then the number of failure tests is increased by one.
- 7. After the SS receives the MeasurementReport messages in step 6 or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop. Set Cell 3 primary scrambling code = ((current cell 3 primary scrambling code 50) mod 200 + 100) for the next iteration of the test procedure loop.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A, or
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

8.11.3.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.11.3.4.3-1: Common Exception messages

Default Message Contents					
Common contents of system information					
blocks exceptions					
Default RRC messages and information	Table H.3.1-1				
elements contents exceptions	Table H.3.1-7				

Table 8.11.3.4.3-2: *MeasConfig-DEFAULT*: Additional E-UTRAN FDD-FDD Inter-frequency and UTRAN FDD event triggered reporting under fading propagation conditions

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.	6.6-1 MeasConfig-DEFAULT:		
Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModList SEQUENCE (SIZE	3 entry		
(1maxObjectId)) OF SEQUENCE {			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f1		
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA-	serving frequency	
	GENERIC(f1)		
}			
}			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f2		
measObject CHOICE {	•		
MeasObjectEUTRA	MeasObjectEUTRA-	inter frequency	
,	GENERÍC(f2)	. ,	
}			
}			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f8		
measObject CHOICE {	, -		
MeasObjectUTRA	MeasObjectEUTRA-	inter frequency	
,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	GENERIC(8)		
}	(-)		
}			
}			
reportConfigToRemoveList	Not present		
reportConfigToAddModList SEQUENCE (SIZE	2 entry		
(1maxReportConfigId))OF SEQUENCE {			
reportConfigToAddMod ::= SEQUENCE {			
reportConfigId	idReportConfig-A3		
reportConfig	ReportConfigEUTRA-A3		
}			
eportConfigToAddMod ::= SEQUENCE {			
reportConfigld	idReportConfig-B2		
reportConfig	ReportConfigInterRAT-		
	B2-UTRA		
}			
}			
measIdToRemoveList	Not present		
measIdToAddModList SEQUENCE (SIZE	2 entry		
(1maxMeasId)) of SEQUENCE {	,		
measIdToAddMod ::= SEQUENCE {			
measld	1		
measObjectId	IdMeasObject-f2		
reportConfigId	idReportConfig-A3		1
}	.artoportooring / to		
measIdToAddMod ::= SEQUENCE {	+		
measId	2		1
measObjectId	IdMeasObject-f8		
reportConfigId	idReportConfig-B2		1
\	ACCEPOITOOTING-DZ		1
}			
quantityConfig	QuantityConfig-		
quantityConing 	DEFAULT		
measGapConfig	MeasGapConfig-GP1		1
s-Measure	Not present		1
preRegistrationInfoHRPD			1
speedStatePars	Not present		-
specusialer als	Not present		
]			<u> </u>

Table 8.11.3.4.3-3: ReportConfigEUTRA-A3: Additional E-UTRAN FDD-FDD Inter-frequency and UTRAN FDD event triggered reporting under fading propagation conditions

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-6 ReportConfigEUTRA-A3					
Information Element	Value/remark	Comment	Condition		
ReportConfigEUTRA ::= SEQUENCE {					
triggerType CHOICE {					
event SEQUENCE {					
eventId CHOICE {					
eventA3 SEQUENCE {					
a3-Offset	-12 (-6 dB)	-6 is actual value in dB (-6 * 0.5 dB)			
}		,			
}					
Hysteresis	0 (0 dB)	0 is actual value in dB (0 * 0.5 dB)			
timeToTrigger	0 (0 ms)	•			
}					
}					

Table 8.11.3.4.3-4: ReportConfigInterRAT-B2-UTRA: Additional E-UTRAN FDD-FDD Inter-frequency and UTRAN FDD event triggered reporting under fading propagation conditions

Derivation Path: 36.508 clause 4.6.6 Table 4.6.6-7B			
Information Element	Value/remark	Comment	Condition
ReportConfigInterRAT-B2-UTRA(UTRA-Thres) ::=			
SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventB2 SEQUENCE {			
b2-Threshold1 CHOICE {			
threshold-RSRP	53(-88dBm)	INTEGER(097), the mapping table is Table 9.1.4-1 in [36.133]	
b2-Threshold2 CHOICE {			
B2-Threshold-UTRA CHOICE {			
thresholdUTRA- EcN0	13 (-18dBm)	UTRA-Thres is actual CPICH Ec/N0 value in dBm	UTRA-FDD
}			
}			
}			
}			
Hysteresis	0 (0 dB)	0 is actual value in dB (0 * 0.5 dB)	
timeToTrigger	ms0	Value range FFS	
}			
}			
}			

Table 8.11.3.4.3-5 *MeasResults*: Additional E-UTRAN FDD-FDD Inter-frequency and UTRAN FDD event triggered reporting under fading propagation conditions

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	[1]		
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
}			
}			

Table 8.11.3.4.3-6: *MeasResultListEUTRA*: Additional E-UTRAN FDD-FDD Inter-frequency and UTRAN FDD event triggered reporting under fading propagation conditions

Information Element	Value/remark	Comment	Condition
MeasResultListEUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF MeasResultEUTRA {			
MeasResultEUTRA ::= SEQUENCE {			
physCellId	PhysicalCellIdentity		
measResult SEQUENCE {			
rsrpResult		Set according to	
		specific test	
rsrqResult		Set according to	
		specific test	
}			
}			

Table 8.11.4.4.3-7: *MeasuredResults*: Additional E-UTRAN FDD-FDD Inter-frequency and UTRAN FDD event triggered reporting under fading propagation conditions

Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	[2]		
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListUTRA	MeasResultListUTRA		
}			

Table 8.11.4.4.3-8: *MeasResultListUTRA*: Additional E-UTRAN FDD-FDD Inter-frequency and UTRAN FDD event triggered reporting under fading propagation conditions

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId CHOICE {			
fdd	PhysCellIdUTRA-FDD	INTEGER (0127)	
}			
measResult SEQUENCE {			
utra- EcN0		Set according to	
		specific test INTEGER (-591)	
}		,	
}			

8.11.3.5 Test requirement

Table 8.11.3.5-1 and 8.11.3.5-2 define the primary level settings including test tolerances for two E-UTRAN FDD cells and one UTRAN FDD cell.

Table 8.11.3.5-1: Cell specific test parameters for Combined inter-frequency and UTRAN event triggered reporting in fading propagation conditions

Parameter	Unit	Cell 1		Ce	ell 2
		T1	T2	T1	T2
E-UTRA RF Channel		1	1 2		2
Number					
BW _{channel}	MHz	10)	,	10
OCNG Patterns					
defined in D.1.1 (OP.1		OP 1	FDD	OP 1	2 FDD
FDD) and in D1.2		01.1	OP.1 FDD OP.2 FDD		2100
(OP.2 FDD)					
PBCH_RA	dB				
PBCH_RB	dB				
PSS_RA	dB				
SSS_RA	dB				
PCFICH_RB	dB				
PHICH_RA	dB				
PHICH_RB	dB	0			0
PDCCH_RA	dB				
PDCCH_RB	dB				
PDSCH_RA	dB				
PDSCH_RB	dB				
OCNG_RA ^{Note 1}	dB				
OCNG_RB ^{Note 1}	dB				

$N_{oc}^{ m Note~3}$	dBm/15 kHz			-98	
RSRP Note 4	dBm/15 kHz	-94 + TT	-94 + TT	-Infinity	-91 + TT
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	dB	4 + TT	4 + TT	-Infinity	7 + TT
SCH_RP Note 4	dBm/15 kHz	-94 + TT	-94 + TT	-Infinity	-91 + TT
\hat{E}_s/N_{oc}	dB	4 + TT	4 + TT	-Infinity	7 + TT
Propagation Condition		AW	'GN	ETI	U70

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 3: Interference from other cells and noise sources not specified in the test is assumed to be constant

over subcarriers and time and shall be modelled as AWGN of appropriate power for $^{N}{}_{oc}$ to be fulfilled

Note 4: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.11.3.5-1: Cell specific test parameters for UTRAN FDD (cell # 3) for event triggered reporting of UTRAN FDD cell under fading propagation conditions

Parameter	Unit	Cell 3		
		T1	T2	
UTRA RF Channel Number		1		
CPICH_Ec/lor	dB	-10		
PCCPCH_Ec/lor	dB	-12		
SCH_Ec/lor	dB	-12		
PICH_Ec/lor	dB	-15		
DPCH_Ec/lor	dB	N/A		
OCNS		-0.941		
\hat{I}_{or}/I_{oc}	dB	-Infinity	-1.8	
I_{oc}	dBm/3.84 MHz	-70		
CPICH_Ec/lo	dB	-Infinity	-14	
Propagation Condition		Case 5 (Note 3)		

Note 1: The DPCH level is controlled by the power control loop.

Note 2: The power of the OCNS channel that is added shall make the total power from the cell to be equal to I

Note 3: Case 5 propagation conditions are defined in Annex A of 3GPP TS 25.101.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 7682ms from the beginning of time period T2.

The UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 4802 ms from the beginning of time period T2.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement for Event A3 is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_inter}$

$$T_{\text{Identify_Inter}} = T_{\text{Basic_Identify_Inter}} \cdot \frac{480}{T_{\text{Interl}}} \cdot N_{\text{freq}} \quad ms$$

Where:

 $T_{Basic_Identify_Inter} = 480$ ms. It is the time period used in the inter frequency equation where the maximum allowed time for the UE to identify a new FDD inter-frequency cell is defined.

 $T_{inter1}=60ms$

 $N_{freq}=2$.

TTI insertion uncertainty = 2 ms

Therefore, the overall delays of Event A3 triggered measurement report measured shall be less than a total of 7682ms in this test case (note: this gives a total of 7680 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

Similarly, the overall delays measured test requirement for Event B2 is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify, UTRA_FDD}$

$$T_{\text{identify, UTRA_FDD}} = T_{\text{basic_identify_UTRA_FDD}} \cdot \frac{480}{T_{\text{inter1}}} \cdot N_{\textit{Freq}} \quad \textit{ms}$$

T_{basic identify UTRA FDD} = 300 ms

 $T_{Inter1} = 30 \text{ ms}$

 $N_{Freq} = 1$

TTI insertion uncertainty = 2 ms

Therefore, the overall delays of Event B2 triggered measurement report measured shall be less than a total of 4802 ms in this test case (note: this gives a total of 4800 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

8.11.4 InterRAT E-UTRA TDD to E-UTRA TDD and UTRA TDD cell search

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined.
- Statistical testing of cell re-selection delay performance requirements are undefined

8.11.4.1 Test purpose

To verify that the UE makes correct reporting of an event when doing inter frequency measurements and UTRA TDD measurements.

8.11.4.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward that support UTRA TDD.

8.11.4.3 Minimum conformance requirements

When measurement gaps are scheduled the UE shall be able to identify a new TDD inter-frequency within $T_{Identify_Inter}$ according to the following expression:

$$T_{\text{Identify_Inter}} = T_{\text{Basic_Identify_Inter}} \cdot \frac{480}{T_{\text{Interl}}} \cdot N_{\text{freq}} \quad ms$$

Where:

 $T_{Basic_Identify_Inter} = 480$ ms. It is the time period used in the inter frequency equation where the maximum allowed time for the UE to identify a new TDD inter-frequency cell is defined.

T_{inter1} is defined in TS 36.133 [4] section 8.1.2.1

 N_{freq} is defined in TS 36.133 [4] section 8.1.2.1.1.

A cell shall be considered detectable provided following conditions are fulfilled:

- RSRP $|_{dBm} \ge -125 \text{ dBm}$ and for Bands 33, 34, 35, 36, 37, 38, 39, 40, 42, 43 and RSRP Ês/Iot $\ge -4 \text{ dB}$,
- RSRP $_{dBm} \ge -124$ dBm for Band 41 and RSRP \hat{E} s/Iot ≥ -4 dB,
- other RSRP related side conditions given in Section 9.1 are fulfilled.
- SCH_RP|_{dBm} \geq -125 dBm for Bands 33, 34, 35, 36, 37, 38, 39, 40, 42, 43 and SCH £s/Iot \geq -4 dB,
- SCH_RP $|_{dBm} \ge -124 \ dBm$ for Band 41 and SCH $\hat{E}s/Iot \ge -4 \ dB$.

When measurement gaps are scheduled for TDD inter frequency measurements the UE physical layer shall be capable of reporting measurements to higher layers with measurement accuracy as specified in TS 36.133 sub-clause 9.1.3 with measurement period ($T_{\text{Measurement_Period_TDD_Inter}$) given by table 8.11.4.3-1.

Table 8. 11.4.3-1: T_{Measurement Period TDD Inter} for different configurations

Configuration	Measurement bandwidth	Number of UL/DL sub-frames DwPTS per half frame (5 ms)				T _{Measurement_Period_TDD_I} nter [ms]
	[RB]	DL	UL	Normal CP	Extended CP	
0	6	2	2	$19760 \cdot T_{\rm s}$	$20480 \cdot T_{\rm s}$	480 x N _{freq}
1 (Note 1)	50	2	2	$19760 \cdot T_{\rm s}$	20480·T _s	240 x N _{freq}
	onfiguration is opti- efined in 3GPP TS					

Where:

T_{inter1} is defined in TS 36.133 [4] section 8.1.2.1

 N_{freq} is defined in TS 36.133 [4] section 8.1.2.1.1.

The UE shall be capable of performing RSRP and RSRQ measurements of at least 4 inter-frequency cells per TDD inter-frequency and the UE physical layer shall be capable of reporting RSRP and RSRQ measurements to higher layers with the measurement period $T_{\text{Measurement Period TDD Inter.}}$

Reported measurements contained in event triggered measurement reports shall meet the requirements in TS 36.133 [4] clause 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $[2] \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than T $_{Identify_Inter}$ defined in TS 36.133 [4] clause 8.1.2.3.2.1. When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{identify_intra}$ defined in TS 36.133 [4] section 8.1.2.2.1.1 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event, the event triggered measurement reporting delay shall be less than $T_{Measurement_Period\ Intra}$ provided the timing to that cell has not changed more than \pm 50 Ts and the L3 filter has not been used. When L3 filtering is used an additional delay can be expected

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.3.2.

The measurement reporting delay shall be less than $T_{identify,\,UTRA_TDD}$ in RRC_CONNECTED state.

When explicit neighbour list is provided and no DRX is used the UE shall be able to identify a new detectable cell belonging to the monitored set within

$$T_{\text{identify, UTRA_TDD}} = Max \bigg\{ 5000, T_{\text{basic identify UTRA_TDD}} \cdot \frac{480}{T_{\text{interl}}} \cdot N_{\textit{Freq}} \bigg\} \textit{ms}$$

If the UE does not require transmit gap to perform inter-RAT UTRA TDD measurements, the UE shall be able to identify a new detectable inter-RAT UTRA TDD cell belonging to the monitored set within 5000 ms.

A cell shall be considered detectable when

- P-CCPCH Ec/Io \geq -8 dB,
- DwPCH_Ec/Io \geq -5 dB.

When L3 filtering is used an additional delay can be expected.

When transmission gaps are scheduled for UTRA TDD inter RAT measurements the UE physical layer shall be capable of reporting measurements to higher layers with measurement accuracy as specified in TS 36.133 [4] clause 9.3 with measurement period given by

$$T_{\text{measurement UTRA_TDD}} = Max \left\{ T_{\text{Measurement_Period UTRA_TDD}}, T_{\text{basic measurement UTRA_TDD}}, \frac{480}{T_{\text{inter1}}}, N_{\textit{Freq}} \right\} ms$$

If the UE does not need measurement gaps to perform UTRA TDD measurements, the measurement period for UTRA TDD measurements is 480 ms.

The UE shall be capable of performing UTRA TDD P-CCPCH RSCP measurements for $X_{basic\ measurementUTRA_TDD}$ interfrequency cells per TDD frequency of the monitored set and the UE physical layer shall be capable of reporting measurements to higher layers with the measurement period of $T_{Measurement\ UTRA\ TDD}$.

 $X_{basic\ measurement\ TDDinter} = 6$

 $T_{\text{Measurement_Period UTRA_TDD}}$ = 480 ms is the period used for calculating the measurement period $T_{\text{measurement_UTRA_TDD}}$ for UTRA TDD P-CCPCH RSCP measurements.

 $T_{basic_identify_UTRA_TDD} = 800$ ms is the time period used in the inter RAT equation where the maximum allowed time for the UE to identify a new UTRA TDD cell is defined.

 $T_{basic_measurement_UTRA_TDD} = 50$ ms is the time period used in the equation for defining the measurement period for inter RAT P-CCPCH RSCP measurements.

 N_{freq} and T_{inter1} are defined in TS 36.133 [4] section 8.1.2.1.1

Reported measurements in periodically triggered measurement reports shall meet the requirements in TS 36.133 [4] section 9.

Reported measurements in event triggered measurement reports shall meet the requirements in TS 36.133 [4] section 9.

The UE shall not send any event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The measurement reporting delay is defined as the time between any events that will trigger a measurement report until the UE starts to transmit the measurement report over the Uu interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is twice the TTI of the uplink DCCH. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify, \, UTRA_TDD}$ defined in TS 36.133 [4] Section 8.1.2.4.3.1.1 When L3 filtering is used an additional delay can be expected.

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements in TS 36.133 [4] section 9.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in TS 36.133 [4] section 8.1.2.4.3.1.4 Event Triggered Reporting.

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.4.3.

8.11.4.4 Test description

8.11.4.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise source to the UE antenna connectors as shown in TS 36.508 [7] Annex A Figure A.24.
- 2. The general test parameter settings are set up according to Table 8.11.4.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 8.11.4.4.3.
- 5. There are two E-UTRA TDD cells operating on different frequency and one UTRA TDD cell specified in the test. Cell 1 (EUTRA TDD cell on RF channel number 1) is the cell used for registration with the power level set according to Annex C.0 and C.1 for this test.

Table 8.11.4.4.1-1: General test parameters for combined E-UTRA TDD inter-frequency and UTRA TDD cells search under fading propagation conditions

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference	As specified in section A.1.2
		Measurement	
		Channel R.0 TDD	
PCFICH/PDCCH/PHICH		DL Reference	As specified in section A.2.2
parameters		Measurement	
		Channel R.6 TDD	
Active cell		Cell 1	E-UTRA TDD cell is on RF channel number 1
Neighbour cell		Cell 2	E-UTRA TDD cell is on RF channel number 2
		Cell 3	1.28Mcps TDD cell
CP length of cell1 and cell2		Normal	
Uplink-downlink configuration		1	As specified in Table 4.2-2 in TS 36.211. The
of cell1 and cell2			same configuration in both cells
Special subframe		6	As specified in table 4.2-1 in TS 36.211. The
configuration of cell1 and			same configuration in both cells
cell2			
Gap Pattern Id		0	As specified in 3GPP TS 36.133 section
			8.1.2.1.
E-UTRAN TDD measurement		RSRP	
quantity			
UTRAN TDD measurement		RSCP	
quantity			
DRX	i.e.	OFF	D
Ofn	dB	0	Parameter for A3 and B2 event
Ocn	dB	0	Parameter for A3 event
Hys	dB	0	Parameter for A3 and B2 event
Ofs	dB	0	Parameter for A3 event
Ocs	dB	0	Parameter for A3 event
A3-Offset	dB	-6	Parameter for A3 event
Thresh1	dBm	-88	Absolute E-UTRAN RSRP threshold for event
			B2
Thresh2	dBm	-83	Absolute UTRAN RSCP threshold for event B2
Hysteresis	dB	0	
TimeToTrigger	dB	0	
Filter coefficient		0	L3 filtering is not used
T1	S	>5	During T1, cell 2 and cell 3 shall be powered
			off. During the off time the physical layer cell
			identity of cell 2 shall be changed, and the
T0		4.5	scrambling code of cell 3 shall be changed.
T2	S	15	

8.11.4.4.2 Test procedure

This test scenario comprised of 2 E-UTRA TDD cells operating on different frequency, and 1 UTRA TDD cell. The test consists of 2 successive time periods, with time duration T1 and T2. In the measurement control information it is indicated to the UE that event-triggered reporting with Event A3 and B2 shall be used. At T1 the UE is camped on to Cell 1

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 8.11.4.5-1 and Table 8.11.4.5-2. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 8.11.4.5-1 and Table 8.11.4.5-2.
- 6. UE shall transmit a MeasurementReport message triggered by event A3 and B2. If the overall delays measured from the beginning of time period T2 is less than 7760 ms for event A3 report then the number of successful tests is increased by one. If the UE fails to report the event A3 within the overall delays measured requirement

then the number of failure tests is increased by one. If the overall delay measured from the beginning of time period T2 is less than 12.88s for event B2 report then the number of successful tests is increased by one. If the UE fails to report the event B2 within the overall delays measured requirement then the number of failure tests is increased by one.

- 7. After the SS receives the MeasurementReport messages in step 6 or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop. Set Cell 3 primary scrambling code = ((current cell 3 primary scrambling code 50) mod 200 + 100) for the next iteration of the test procedure loop.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A, or
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

8.11.4.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 8.11.4.4.3-1: Common Exception messages

Default Message Contents				
Common contents of system information				
blocks exceptions				
Default RRC messages and information	Table H.3.1-1			
elements contents exceptions	Table H.3.1-7			

Table 8.11.4.4.3-2: *MeasConfig-DEFAULT*: Additional E-UTRAN TDD-TDD inter frequency event triggered reporting under fading propagation conditions in asynchronous cells test requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Tab Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModList	Not present		
reportConfigToRemoveList	Not present		
reportConfigToAddModList	ReportConfigEUTRA-A3 ReportConfigInterRAT-B2- UTRA		
measIdToRemoveList	Not present		
measIdToAddModList	Not present		
quantityConfig	QuantityConfig-DEFAULT		
measGapConfig	MeasGapConfig-GP1		
s-Measure	Not present		
preRegistrationInfoHRPD	Not present		
speedStatePars	Not present		

Table 8.11.4.4.3-3: ReportConfigEUTRA-A3: Additional E-UTRAN TDD-TDD inter frequency event triggered reporting under fading propagation conditions in asynchronous cells test requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6	6.6-6 ReportConfigEUTRA	-A3	
Information Element	Value/remark	Comment	Condition
ReportConfigEUTRA ::= SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset	-12 (-6 dB)	-6 is actual value in	
		dB (-6 * 0.5 dB)	
}			
}			
Hysteresis	0 (0 dB)	0 is actual value in	
		dB (0 * 0.5 dB)	
timeToTrigger	0 (0 ms)		
}			
}			

Table 8.11.4.4.3-4: ReportConfigInterRAT-B2-UTRA: Additional E-UTRAN TDD - UTRAN TDD event triggered reporting under fading propagation conditions

Derivation Path: 36.508 clause 4.6.6 Table 4.6.6-7B			
Information Element	Value/remark	Comment	Condition
ReportConfigInterRAT-B2-UTRA(UTRA-Thres) ::=			
SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventB2 SEQUENCE {			
b2-Threshold1 CHOICE {			
threshold-RSRP	53(-88dBm)	INTEGER(097), the mapping table is Table 9.1.4-1 in [36.133]	
b2-Threshold2 CHOICE {			
B2-Threshold-UTRA CHOICE {			
thresholdUTRA-RSCP	32(UTRA-Thres + 115)	UTRA-Thres is actual RSCP value in dBm	UTRA-TDD
}			
}			
}			
}			
Hysteresis	0 (0 dB)	0 is actual value in dB (0 * 0.5 dB)	
timeToTrigger	ms0	Value range FFS	
}			
}			
}			

Table 8.11.4.4.3-5: *MeasResults*: Additional E-UTRAN TDD-TDD inter frequency event triggered reporting under fading propagation conditions in asynchronous cells test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	[1]		
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
}			
}			

Table 8.11.4.4.3-6: MeasResultListEUTRA: Additional E-UTRAN TDD-TDD inter frequency event triggered reporting under fading propagation conditions in asynchronous cells test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListEUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF MeasResultEUTRA {			
MeasResultEUTRA ::= SEQUENCE {			
physCellId	PhysicalCellIdentity		
cgi-Info SEQUENCE {			
cellgloballd-EUTRA	GlobalCellId-EUTRA		
tac-IDrackingAreaCode	TrackingAreaCode		
plmn-IdentityList	Not present		
}			
measResult SEQUENCE {			
rsrpResult	Not present		
rsrqResult	Not present		
}			
}			

Table 8.11.4.4.3-7: *MeasuredResults*: Additional E-UTRAN TDD - UTRAN TDD event triggered reporting under fading propagation conditions

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	[2]		
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListUTRA	MeasResultListUTRA		
}			
]}			

Table 8.11.4.4.3-8: *MeasResultListUTRA*: Additional E-UTRAN TDD - UTRAN TDD event triggered reporting under fading propagation conditions

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId CHOICE {			
tdd	PhysCellIdUTRA-TDD	INTEGER (0127)	
}			
cgi-Info SEQUENCE {			
cellGloballd	CellGloballdUTRA		
IocationAreaCode	Not present		
routingAreaCode	Not present		
plmn-IdentityList	Not present		
}			
measResult SEQUENCE {			
utra-RSRP		Set according to	
		specific test	
		INTEGER (-591)	
}			
}			

8.11.4.5 Test requirement

Tables 8.11.4.5-1 and 8.11.4.5-2 define the primary level settings including test tolerances for two E-UTRAN TDD cells and one UTRAN FDD cell.

Table 8.11.4.5-1: Cell specific test parameters for combined E-UTRAN TDD inter-frequency and UTRA TDD cell search under fading propagation conditions(cell1 and cell2)

Parameter	Unit	Cell 1		Ce	II 2	
		T1	T2	T1	T2	
E-UTRA RF Channel		1		2	2	
Number						
BWchannel	MHz	1	0	1	0	
OCNG Pattern defined						
in D.2.1 (OP.1 TDD)		OP 1	TDD	OP.2	TDD	
and in D.2.2 (OP.2		01.1	100	01 .2	100	
TDD)						
PBCH_RA	dB					
PBCH_RB	dB					
PSS_RA	dB					
SSS_RA	dB					
PCFICH_RB	dB					
PHICH_RA	dB					
PHICH_RB	dB	(0	0		
PDCCH_RA	dB					
PDCCH_RB	dB					
PDSCH_RA	dB					
PDSCH_RB	dB					
OCNG_RANote 1	dB					
OCNG_RBNote 1	dB					
\hat{E}_s/I_{ot}	dB	4+TT	4+TT	-Infinity	7+TT	
\hat{E}_s/N_{oc}	dB	4+TT 4+TT		-Infinity	7+TT	
N_{oc}	dBm/15 kHz	-98				
RSRP	dBm/15 kHz	-94+TT	-94+TT	-Infinity	-91+TT	
SCH_RP	dBm/15 kHz	-94+TT	-94+TT	-infinity	-91+TT	
Propagation Condition			/GN	ETI		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: The resources for uplink transmission are assigned to the UE priori to the start of time period T2.

Note 3: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.11.4.5-2: Cell specific test parameters for combined E-UTRA TDD inter-frequency and UTRA TDD cell search under fading propagation conditions (cell3)

Unit	Cell 3 (UTRA)			
	()	DwPTS	
	T1	T2	T1	T2
		Chan	inel 3	
dB	-3			
dB			0	
dB	-;	3		
dB	-Infinity	9+TT	-Infinity	9+TT
dBm/1.28 MHz	-80			
dBm	-Infinity -74+TT n.a.		a.	
	Case 3			
	dB dB dB dB dB dBm/1.28 MHz dBm	dB - Infinity dBm - Infinity	0 T1 T2 Char dB -3 dB -3 dB -Infinity 9+TT dBm/1.28 MHz -E dBm -Infinity -74+TT Cas	0 DwF T1

Note1: The DPCH of all cells are located in a timeslot other than 0.

Note2: In the case of multi-frequency network, the UTRA RF Channel Number can be set for the primary frequency in this test.

Note3: P-CCPCH RSCP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement for Event A3 is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_inter}$

$$T_{\text{Identify_Inter}} = T_{\text{Basic_Identify_Inter}} \cdot \frac{480}{T_{\text{Interl}}} \cdot N_{\text{freq}} \quad ms$$

Where:

 $T_{Basic_Identify_Inter} = 480$ ms. It is the time period used in the inter frequency equation where the maximum allowed time for the UE to identify a new TDD inter-frequency cell is defined.

 T_{inter1} =60ms

 $N_{\text{freq}} = 2$.

TTI insertion uncertainty = 2 ms

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 7682ms from the beginning of time period T2 (note: this gives a total of 7680 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

Similarly, the overall delays measured test requirement for Event B2 is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify,UTRA_TDD}$

$$T_{\text{identify, UTRA_TDD}} = Max \left\{ 5000, T_{\text{basic identify UTRA_TDD}} \cdot \frac{480}{T_{\text{interl}}} \cdot N_{\textit{Freq}} \right\} \textit{ms}$$

Where:

 $T_{basic_identify_UTRA_TDD} = 800$ ms is the time period used in the inter RAT equation where the maximum allowed time for the UE to identify a new UTRA TDD cell is defined.

 $T_{basic_measurement_UTRA_TDD} = 50$ ms is the time period used in the equation for defining the measurement period for inter RAT P-CCPCH RSCP measurements.

 T_{inter1} =60ms

 $N_{freq}=2$.

TTI insertion uncertainty = 2 ms

The UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1202m8s from the beginning of time period T2 (note: this gives a total of 12.8 s for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

8.11.5 Combined E-UTRAN FDD - E-UTRA FDD and GSM cell search. E-UTRA cells in fading; GSM cell in static propagation conditions

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

• The Test system uncertainties applicable to this test are undefined

- The Test tolerances applicable to this test are undefined.
- Statistical testing of cell re-selection delay performance requirements are undefined
- The message contents section is not completed
- The requirement for event B2 is still within brackets in the core spec.

8.11.5.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of multiple events when doing inter frequency and GSM measurements.

8.11.5.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 9 and forward that support GSM.

8.11.5.3 Minimum conformance requirements

E-UTRAN part:

When measurement gaps are scheduled the UE shall be able to identify a new FDD inter-frequency within $T_{Identify_Inter}$ according to the following expression:

$$T_{\text{Identify_Inter}} = T_{\text{Basic_Identify_Inter}} \cdot \frac{480}{T_{\text{Inter}}} \cdot N_{freq} \quad ms$$

Where:

 $T_{Basic_Identify_Inter} = 480$ ms. It is the time period used in the inter frequency equation where the maximum allowed time for the UE to identify a new FDD inter-frequency cell is defined.

 N_{freq} is defined in TS 36.133 [4] section 8.1.2.1.1 and T_{inter1} is defined in TS 36.133 [4] section 8.1.2.1

A cell shall be considered detectable provided following conditions are fulfilled:

- RSRP_{dBm} \geq -125 dBm and for Bands 1, 4, 6, 10, 11, 18, 19, 21 and RSRP Ês/Iot \geq -4 dB,
- RSRP $|_{dBm} \ge -124 \text{ dBm for Bands 9 and RSRP } \hat{E}_{s}/Iot \ge -4 \text{ dB},$
- RSRP $|_{dBm} \ge -123 \text{ dBm}$ for Bands 2, 5, 7, 17 and RSRP $\hat{E}s/Iot \ge -4 \text{ dB}$,
- RSRP|_{dBm} \ge -122 dBm for Bands 3, 8, 12, 13, 14, 20 and RSRP Ês/Iot \ge -4 dB,
- other RSRP related side conditions given in Section 9.1 are fulfilled,
- SCH_RP|_{dBm}≥ -125 dBm for Bands 1, 4, 6, 10, 11, 18, 19, 21 and SCH Ês/Iot ≥ -4 dB,
- SCH_RP $|_{dBm} \ge -124 dBm$ for Band 9 and SCH Ês/Iot $\ge -4 dB$,
- SCH_RP $|_{dBm} \ge -123$ dBm for Bands 2, 5, 7, 17 and SCH Ês/Iot ≥ -4 dB,
- SCH_RP $|_{dBm}$ ≥ -122 dBm for Bands 3, 8, 12, 13, 14, 20 and SCH Ês/Iot ≥ -4 dB.

When measurement gaps are scheduled for FDD inter frequency measurements the UE physical layer shall be capable of reporting measurements to higher layers with measurement accuracy as specified in TS36.133 sub-clause 9.1.3 with measurement period given by table 8.11.5.3-1.

Table 8.11.5.3-1: RSRP measurement period and measurement bandwidth

Configuration	Physical Layer Measurement period:	Measurement bandwidth [RB]			
	T _{Measurement_Period_Inter_FDD} [ms]				
0	480 x N _{freq}	6			
1 (Note)	240 x N _{freq}	50			
TBD TBD TBD					
Note: This configuration is optional					

The UE shall be capable of performing RSRP and RSRQ measurements of at least 4 inter-frequency cells per FDD inter-frequency for up to 3 FDD inter-frequencies and the UE physical layer shall be capable of reporting RSRP and RSRQ measurements to higher layers with the measurement period defined in Table 8.11.5.3-1.

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements in TS36.133 [4] section 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH . The delay uncertainty is: $[2] \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than T _{identify-inter} defined in TS36.133 [4] section 8.1.2.3.1.1. When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{identify_interint}$ defined in TS36.133 [4] section 8.1.2.3.1.1 and then enters or leaves the reporting range, the event triggered measurement reporting delay shall be less than $T_{Measurement_Period_Inter_FDD}$ defined in TS36.133 [4] section 8.1.2.3.1.1 provided the timing to that cell has not changed more than \pm 50 Ts while measurement gap has not been available and the L3 filter has not been used. When L3 filtering is used an additional delay can be expected.

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.3.1.

GSM part:

Measurements on GSM cells can be requested with BSIC verified.

In RRC_CONNECTED state when a supported measurement gap pattern sequence according to Table 8.1.2.1-1 in TS 36.133 [4] is configured by E-UTRAN the UE shall continuously measure GSM cells, search for new GSM cells given in the monitored set and re-confirm the BSIC for already detected cells. During DRX periods the UE may use other periods of time outside the specified measurement gap patterns.

This measurement shall be based on measurement gaps allocated for GSM carrier RSSI measurement as described in section 8.1.2.1 in TS 36.133 [4] A UE supporting GSM measurements shall measure minimum number of 10 GSM carrier RSSI measurement samples ($N_{GSM\ carrier\ RSSI}$) per measurement gap. In RRC_CONNECTED state the measurement period, $T_{Measurement\ Period,\ GSM}$, for the GSM carrier RSSI measurement is N_{freq} * 480 ms. The parameter N_{freq} is defined in clause 8.1.2.1.1 [4] as:

$$N_{\text{freq}} \equiv N_{\text{freq, E-UTRA}} + N_{\text{freq, UTRA}} \ + M_{\text{gsm}} + N_{\text{freq, cdma2000}} + N_{\text{freq, HRPD}}$$

Where:

N_{freq, E-UTRA} is the number of E-UTRA carriers being monitored

N_{freq, UTRA} is the number of UTRA carriers being monitored

 $N_{\text{freq, cdma}2000}$ is the number of cdma2000 carriers being monitored

 $N_{\text{freq, HRPD}}$ is the number of HRPD carriers being monitored

 M_{GSM} is an integer which is a function of the number of GSM carriers on which measurements are being performed. M_{GSM} is equal to 0 if no GSM carrier is being monitored. For a Measurement Gap Repetition Period (MGRP) of 40 ms,

 M_{GSM} is equal to 1 if cells on up to 32 GSM carriers are being measured. For a MGRP of 80 ms, M_{GSM} is equal to [ceil ($N_{carriers, GSM}$ /20)] where $N_{carriers, GSM}$ is the number of GSM carriers on which cells are being measured

The UE shall meet the measurement accuracy requirements stated for RXLEV in TS 45.008 [15], when the given measurement time allows the UE to take at least 3 GSM carrier RSSI samples per GSM carrier in the monitored set during the measurement period.

In case the UE is not able to acquire the required number of samples per GSM carrier during one measurement period, the UE shall measure as many GSM carriers as possible during that measurement period using at least 3 samples per GSM carrier. The GSM carriers that were not measured during that measurement period shall be measured in the following measurement periods.

BSIC verification:

Measurements on a GSM cell can be requested with BSIC verified. The UE shall be able to report the GSM cells with BSIC verified for those cells where the verification of BSIC has been successful.

The procedure for BSIC verification on a GSM cell can be divided into the following two tasks:

- **Initial BSIC identification:** Includes searching for the BSIC and decoding the BSIC for the first time when there is no knowledge about the relative timing between the E-UTRAN FDD and GSM cells. The UE shall trigger the initial BSIC identification within the available measurement gap pattern sequence. The requirements for BSIC re-confirmation can be found in section 8.1.2.4.5.1.2.1 of TS 36.133 [4].
- **BSIC re-confirmation:** Tracking and decoding the BSIC of a GSM cell after initial BSIC identification is performed. The UE shall trigger the BSIC re-confirmation within the available measurement gap pattern. The requirements for BSIC re-confirmation can be found in section 8.1.2.4.5.1.2.2 of TS 36.133 [4].

If the network requests measurements on a GSM cell, the UE shall behave as follows:

- The UE shall perform GSM carrier RSSI measurements according to section 8.1.2.4.5.1 in TS 36.133 [4] when a measurement gap pattern sequence is activated.
- The UE shall perform measurement reporting as defined in TS 36.331 [5].
- The UE shall perform BSIC identification if BSIC verified measurements are activated by RRC. The UE shall use the most recently available GSM carrier RSSI measurement results for arranging GSM cells in signal strength order for performing BSIC identification.
- The UE shall perform BSIC re-confirmation on all the GSM cells that have been successfully identified.
- The UE shall perform all configured event evaluation for event-triggered reporting after the BSIC has been verified for a GSM cell. The UE shall use the most recently available GSM carrier RSSI measurement results in event evaluation and event-triggered reporting.
- Event-triggered and periodic reports shall be triggered according to TS 36.331 [5].

The BSIC of a GSM cell is considered to be "verified" if the UE has decoded the SCH of the BCCH carrier and identified the BSIC at least one time (initial BSIC identification). Once a GSM cell has been identified the BSIC shall be re-confirmed at least once every $8*T_{re-confirm,GSM}$ seconds. Otherwise the BSIC of the GSM cell is considered as "non-verified". If a measurement gap pattern sequence is deactivated by the network after BSIC has been identified or verified, the UE shall consider the BSIC as non-verified.

 $T_{identify,GSM}$ indicates the maximum time allowed for the UE to decode the unknown BSIC of the GSM cell in one GSM BCCH carrier in the initial BSIC identification procedure.

 $T_{\text{re-confirm,GSM}}$ indicates the maximum time allowed for the re-confirmation of the BSIC of one GSM cell in the BSIC re-confirmation procedure.

The UE shall be able to decode a BSIC within a measurement gap when the time difference between the middle of the received GSM synchronisation burst at the UE and the middle of the effective measurement gap is within the limits specified in table 8.1.2.4.5.1.2-1 of TS 36.133 [4].

The UE shall be able to perform BSIC verification at levels down to the reference sensitivity level or reference interference levels as specified in TS 45.005 [16].

This measurement shall be based on the measurement gaps used for Initial BSIC identification as described in section 8.1.2.4.5.1.2 of TS 36.133 [4].

The UE shall continuously attempt to decode the BSIC of SCH on the BCCH carrier of the 8 strongest BCCH carriers of the GSM cells indicated in the Inter-RAT cell info list. The UE shall give priority for BSIC decoding attempts in decreasing signal strength order to BCCH carriers with unknown BSIC. The strongest BCCH carrier is defined as the BCCH carrier having the highest measured GSM carrier RSSI value.

If the BSIC of the GSM BCCH carrier has been successfully decoded the UE shall immediately continue BSIC identification with the next GSM BCCH carrier, in signal strength order, with unknown BSIC. The GSM cell for which the BSIC has been successfully identified shall be moved to the BSIC re-confirmation procedure.

If the UE has not successfully decoded the BSIC of the GSM BCCH carrier within $T_{identify,GSM}$ ms, the UE shall abort the BSIC identification attempts for that GSM BCCH carrier. The UE shall continue to try to perform BSIC identification of the next GSM BCCH carrier in signal strength order. The GSM BCCH carrier for which the BSIC identification failed shall not be re-considered for BSIC identification until BSIC identification attempts have been made for all the rest of the 8 strongest GSM BCCH carriers in the monitored set with unknown BSIC.

 $T_{identify,GSM}$ values are given for a set of reference gap patterns in table 8.1.2.4.5.1.2.1-1 of TS 36.133 [4]. The requirements in the table represent the time required to guarantee at least two attempts to decode the BSIC for one GSM BCCH carrier.

Reported measurements in event triggered measurement reports shall meet the requirements in section TS 36.331 [5].

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH.

The event triggered reporting delay requirement is valid when the UE for each GSM carrier in the monitored set can take the required number of samples during the measurement period $T_{Measurement\ Period,\ GSM}$ (see section 8.1.2.4.5.1 of TS 36.133 [4]).

The event triggered measurement reporting delay for a GSM cell with verified BSIC , measured without L3 filtering shall be less than $2*T_{Measurement\ Period,\ GSM}$, where $T_{Measurement\ Period,\ GSM}$ is defined in section 8.1.2.4.5.1. of TS 36.133 [4] When L3 filtering is used an additional delay can be expected.

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.4.5 and A.8.11.5

8.11.5.4 Test description

8.11.5.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator), AWGN noise source and Fader to the UE antenna connectors as shown in TS 36.508 [7] Annex A Figure A.25..
- 2. The general test parameter settings are set up according to Table 8.11.5.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 8.11.5.4.3.
- 5. There are two E-UTRA FDD cells operating on different frequency and one GSM cell specified in the test. Cell 1 (EUTRA FDD cell on RF channel number 1) is the cell used for registration with the power level set according to Annex C.0 and C.1 for this test.

Table 8.11.5.4-1: General test parameters for Combined E-UTRAN FDD - E-UTRA FDD and GSM cell search. E-UTRA cells in fading; GSM cell in static propagation conditions

Parameter	Unit	Value	Comment
PDSCH parameters (E-		DL Reference Measurement	As specified in section A.1.1
UTRAN FDD)		Channel R.0 FDD	
PCFICH/PDCCH/PHICH		DL Reference Measurement	As specified in section A.2.1
parameters		Channel R.6 FDD	
(E-UTRAN FDD)			
Gap Pattern Id		0	As specified in 3GPP TS 36.133 section 8.1.2.1.
Active cell		Cell 1	Cell 1 is on E-UTRA RF channel number 1.
Neighbour cells		Cell 2, 3	Cell 2 is on E-UTRA RF channel number 2.
			Cell 3 is on Absolute RF Channel Number 3
			(GSM cell).
CP length		Normal	Applicable to cell 1 and cell 2
E-UTRA Channel Bandwidth	MHz	10	
(BW _{channel})			
E-UTRAN FDD measurement		RSRP	
quantity			
Ofn	dB	0	Parameter for A3 and B2 event
Ocn	dB	0	Parameter for A3 event
Hys	dB	0	Parameter for A3 and B2 event
Ofs	dB	0	Parameter for A3 event
Ocs	dB	0	Parameter for A3 event
A3-Offset	dB	-6	
Hysteresis	dB	0	
TimeToTrigger	S	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF
Time offset between E-	ms	3 ms	Asynchronous cells
UTRAN FDD cells			
Inter-RAT (GSM)		GSM Carrier RSSI	
measurement quantity			
A3-Offset	dB	-6	
b2-Threshold-E-UTRA	dBm	-85	RSRP threshold for event B2. This is the
			threshold for E-UTRA in the B2 configuration. E-
			UTRA serving cell RSCP is below this
			throughout the test to account for measurement
Lo Till Lill OF DANI			accuracy and fading
b2-Threshold-GERAN	dBm	-80	GSM Carrier RSSI threshold for event B2.
Monitored GSM cell list size		6 GSM neighbours including	List of GSM cells provided before T2 starts.
		ARFCN 3	
T1	S	5	
T2	S	10	

8.11.5.4.2 Test procedure

This test scenario comprised of 2 E-UTRA FDD cells operating on different frequency, and 1 GSM cell. The test consists of 2 successive time periods, with time duration T1 and T2. In the measurement control information it is indicated to the UE that event-triggered reporting with Event A3 and B2 shall be used. At T1 the UE is camped on to Cell 1.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 8.11.5.5-1 and Table 8.11.5.5-2. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 8.11.5.5-1and Table 8.11.5.5-2.

- 6. UE shall transmit a MeasurementReport message triggered by event A3 and B2. If the overall delays measured from the beginning of time period T2 is less than 7682 ms for event A3 report then the number of successful tests is increased by one. If the UE fails to report the event A3 within the overall delays measured requirement then the number of failure tests is increased by one. If the overall delays measured from the beginning of time period T2 is less than XXX[7202] ms for event B2 report then the number of successful tests is increased by one. If the UE fails to report the event B2 within the overall delays measured requirement then the number of failure tests is increased by one.
- 7. After the SS receives the MeasurementReport messages in step 6 or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop. The SS shall set a different BSIC on Cell 3, as the previous timing information of Cell 3 is invalid in the UE for the next iteration of the test procedure loop.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A, or
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

8.11.5.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

[FFS]

8.11.5.5 Test requirement

Tables 8.11.5.5-1 and 8.11.5.5-2 define the primary level settings including test tolerances for two E-UTRAN FDD cells and one GSM cell.

Table 8.11.5.5-1: Cell specific test parameters for Combined E-UTRAN FDD - E-UTRA FDD and GSM cell search. E-UTRA cells in fading; GSM cell in static propagation conditions (cell1 and cell2)

Parameter	Unit	Cell 1		Се	II 2
		T1	T2	T1	T2
E-UTRA RF Channel		•	1		2
Number					
BW _{channel}	MHz	1	0	1	0
OCNG Patterns		OP.1	FDD	OP.2	FDD
defined in D.1.1 (OP.1					
FDD) and in D1.2					
(OP.2 FDD)					
PBCH_RA	dB				
PBCH_RB	dB				
PSS_RA	dB				
SSS_RA	dB				
PCFICH_RB	dB				
PHICH_RA	dB				
PHICH_RB	dB	()	(0
PDCCH_RA	dB				
PDCCH_RB	dB				
PDSCH_RA	dB				
PDSCH_RB	dB				
OCNG_RA ^{Note 1}	dB				
OCNG_RB ^{Note 1}	dB				

$N_{oc}^{ m Note~3}$	dBm/15 kHz	-98				
RSRP Note 4	dBm/15 kHz	-94+TT	-94+TT	-Infinity	-91+TT	
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	dB	4+TT	4+TT	-Infinity	7+TT	
SCH_RP Note 4	dBm/15 kHz	-94+TT	-94+TT	-Infinity	-91+TT	
\hat{E}_s/N_{oc}	dB	4+TT	4+TT	-Infinity	7+TT	
Propagation Condition		ETU70 ETU70			J70	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 3: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{ac} to be fulfilled.

Note 4: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.11.5.5-2: Cell specific test parameters for Combined E-UTRAN FDD - E-UTRA FDD and GSM cell search. E-UTRA cells in fading; GSM cell in static propagation conditions (cell3)

Parameter	Unit	Cell 2		
		T1	T2	
Absolute RF Channel Number		ARFCN3		
RXLEV	dBm	-Infinity	-75+TT	
GSM BSIC		N/A	Valid	

The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement for Event A3 is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_inter}$

$$T_{\text{Identify_Inter}} = T_{\text{Basic_Identify_Inter}} \cdot \frac{480}{T_{\text{Interl}}} \cdot N_{\text{freq}} \quad ms$$

Where:

 $T_{Basic_Identify_Inter} = 480$ ms. It is the time period used in the inter frequency equation where the maximum allowed time for the UE to identify a new FDD inter-frequency cell is defined.

 T_{inter1} =60ms

 $N_{freq}=2$.

TTI insertion uncertainty = 2 ms

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 7682ms from the beginning of time period T2 (note: this gives a total of 7680 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

The overall delays measured test requirement for Event B2 is:

The delay for GSM cell identification with BSIC verified is the sum of the event triggered measurement reporting delay and the initial BSIC identification delay.

The event triggered measurement reporting delay = $2*T_{Measurement\ Period,\ GSM} = 2*N_{freq}*480ms = 1920ms$.

Initial BSIC identification delay = [5280] ms, when one carrier frequency other than GSM is monitored in the gaps (table 8.1.2.4.5.1.2.1-1 of TS 36.133 [4]).

The UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than [7202]ms from the beginning of time period T2 (note: this gives a total of [7200] ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

8.11.6 Combined E-UTRAN TDD - E-UTRA TDD and GSM cell search. E-UTRA cells in fading; GSM cell in static propagation conditions

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined.
- Statistical testing of cell re-selection delay performance requirements are undefined
- The message contents section is not completed
- The requirement for event B2 is still within brackets in the core spec.

8.11.6.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of multiple events when doing inter frequency and GSM measurements.

8.11.6.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 9 and forward that support GSM.

8.11.6.3 Minimum conformance requirements

E-UTRAN part:

When measurement gaps are scheduled the UE shall be able to identify a new TDD inter-frequency within $T_{Identify_Inter}$ according to the following expression:

$$T_{\text{Identify_Inter}} = T_{\text{Basic_Identify_Inter}} \cdot \frac{480}{T_{\text{Inter1}}} \cdot N_{\text{freq}} \quad ms$$

Where:

 $T_{Basic_Identify_Inter} = 480$ ms. It is the time period used in the inter frequency equation where the maximum allowed time for the UE to identify a new TDD inter-frequency cell is defined.

 N_{freq} is defined in TS 36.133 [4] section 8.1.2.1.1 and T_{interl} is defined in TS 36.133 [4] section 8.1.2.1

A cell shall be considered detectable provided following conditions are fulfilled:

- RSRP $|_{dBm} \ge -125 \text{ dBm}$ and for Bands 33, 34, 35, 36, 37, 38, 39, 40, 42, 43 and RSRP Ês/Iot $\ge -4 \text{ dB}$,
- RSRP $|_{dBm} \ge -124 dBm$ and for Band 41 and RSRP Ês/Iot $\ge -4 dB$,
- other RSRP related side conditions given in Section 9.1 are fulfilled.
- SCH_RP|_{dBm} \ge -125 dBm for Bands 33, 34, 35, 36, 37, 38, 39, 40, 42, 43 and SCH £s/Iot \ge -4 dB,
- SCH_RP $|_{dBm} \ge -124 dBm$ for Band 41 and SCH \hat{E} s/Iot $\ge -4 dB$.

When measurement gaps are scheduled for TDD inter frequency measurements the UE physical layer shall be capable of reporting measurements to higher layers with measurement accuracy as specified in TS36.133 sub-clause 9.1.3 with measurement period given by table 8.11.6.3-1.

Table 8.11.6.3-1: T_{Measurement_Period_TDD_Inter} for different configurations

Configuration	Measurement bandwidth	Number of UL/DL sub- frames per half frame (5 ms)				Dw	PTS	T _{Measurement_Period_TDD} _Inter [ms]
	[RB]	DL	UL	Normal CP	Extende d CP			
0	6	2	2	$19760 \cdot T_{\rm s}$	$20480 \cdot T_{\rm s}$	480 x N _{freq}		
1 (Note 1)	50	2	2	19760 · T _s	$20480 \cdot T_{\rm s}$	240 x N _{freq}		
	Note 1: This configuration is optional							

Note 2: T_s is defined in 3GPP TS 36.211 [9]

with the measurement period $T_{Measurement_Period_TDD_Inter}$

The UE shall be capable of performing RSRP and RSRQ measurements of at least 4 inter-frequency cells per TDD inter-frequency and the UE physical layer shall be capable of reporting RSRP and RSRQ measurements to higher layers

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements in TS36.133 [4] section 9.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: [2] x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than T identify inter defined in TS36.133 [4] section 8.1.2.3.2.1. When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period T_{identify_interinter} defined in TS36.133 [4] section 8.1.2.3.12.1 and then enters or leaves the reporting range, the event triggered measurement reporting delay shall be less than T_{Measurement Period TDD Inter FDD} defined in TS36.133 [4] section 8.1.2.3.2.1 provided the timing to that cell has not changed more than ± 50 Ts while measurement gap has not been available and the L3 filter has not been used. When L3 filtering is used an additional delay can be expected.

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.3.2.

GSM part:

Measurements on GSM cells can be requested with BSIC verified.

In RRC_CONNECTED state when a supported measurement gap pattern sequence according to Table 8.1.2.1-1 in TS 36.133 [4] is configured by E-UTRAN the UE shall continuously measure GSM cells, search for new GSM cells given in the monitored set and re-confirm the BSIC for already detected cells. During DRX periods the UE may use other periods of time outside the specified measurement gap patterns.

This measurement shall be based on measurement gaps allocated for GSM carrier RSSI measurement as described in section 8.1.2.1 in TS 36.133 [4] A UE supporting GSM measurements shall measure minimum number of 10 GSM carrier RSSI measurement samples (NGSM carrier RSSI) per measurement gap. In RRC_CONNECTED state the measurement period, $T_{Measurement\ Period,\ GSM}$, for the GSM carrier RSSI measurement is $N_{freq}*480$ ms. The parameter N_{freq} is defined in clause 8.1.2.1.1 [4] as:

$$N_{freq} = N_{freq, E-UTRA} + N_{freq, UTRA} + M_{gsm} + N_{freq, cdma2000} + N_{freq, HRPD}$$

Where:

N_{frea, E-UTRA} is the number of E-UTRA carriers being monitored

N_{freq, UTRA} is the number of UTRA carriers being monitored

N_{freq. cdma2000} is the number of cdma2000 carriers being monitored

N_{freq, HRPD} is the number of HRPD carriers being monitored

 M_{GSM} is an integer which is a function of the number of GSM carriers on which measurements are being performed. M_{GSM} is equal to 0 if no GSM carrier is being monitored. For a Measurement Gap Repetition Period (MGRP) of 40 ms, M_{GSM} is equal to 1 if cells on up to 32 GSM carriers are being measured. For a MGRP of 80 ms, M_{GSM} is equal to [ceil ($N_{carriers, GSM}/20$)] where $N_{carriers, GSM}$ is the number of GSM carriers on which cells are being measured

The UE shall meet the measurement accuracy requirements stated for RXLEV in TS 45.008 [15], when the given measurement time allows the UE to take at least 3 GSM carrier RSSI samples per GSM carrier in the monitored set during the measurement period.

In case the UE is not able to acquire the required number of samples per GSM carrier during one measurement period, the UE shall measure as many GSM carriers as possible during that measurement period using at least 3 samples per GSM carrier. The GSM carriers that were not measured during that measurement period shall be measured in the following measurement periods.

BSIC verification:

Measurements on a GSM cell can be requested with BSIC verified. The UE shall be able to report the GSM cells with BSIC verified for those cells where the verification of BSIC has been successful.

The procedure for BSIC verification on a GSM cell can be divided into the following two tasks:

- **Initial BSIC identification:** Includes searching for the BSIC and decoding the BSIC for the first time when there is no knowledge about the relative timing between the E-UTRAN TDD and GSM cells. The UE shall trigger the initial BSIC identification within the available measurement gap pattern sequence. The requirements for BSIC re-confirmation can be found in section 8.1.2.4.5.1.2.1 of TS 36.133 [4].
- **BSIC re-confirmation:** Tracking and decoding the BSIC of a GSM cell after initial BSIC identification is performed. The UE shall trigger the BSIC re-confirmation within the available measurement gap pattern. The requirements for BSIC re-confirmation can be found in section 8.1.2.4.5.1.2.2 of TS 36.133 [4].

If the network requests measurements on a GSM cell, the UE shall behave as follows:

- The UE shall perform GSM carrier RSSI measurements according to section 8.1.2.4.5.1 in TS 36.133 [4] when a measurement gap pattern sequence is activated.
- The UE shall perform measurement reporting as defined in TS 36.331 [5].
- The UE shall perform BSIC identification if BSIC verified measurements are activated by RRC. The UE shall use the most recently available GSM carrier RSSI measurement results for arranging GSM cells in signal strength order for performing BSIC identification.
- The UE shall perform BSIC re-confirmation on all the GSM cells that have been successfully identified.
- The UE shall perform all configured event evaluation for event-triggered reporting after the BSIC has been verified for a GSM cell. The UE shall use the most recently available GSM carrier RSSI measurement results in event evaluation and event-triggered reporting.
- Event-triggered and periodic reports shall be triggered according to TS 36.331 [5].

The BSIC of a GSM cell is considered to be "verified" if the UE has decoded the SCH of the BCCH carrier and identified the BSIC at least one time (initial BSIC identification). Once a GSM cell has been identified the BSIC shall be re-confirmed at least once every 8*T_{re-confirm,GSM} seconds. Otherwise the BSIC of the GSM cell is considered as "non-verified". If a measurement gap pattern sequence is deactivated by the network after BSIC has been identified or verified, the UE shall consider the BSIC as non-verified.

 $T_{identify,GSM}$ indicates the maximum time allowed for the UE to decode the unknown BSIC of the GSM cell in one GSM BCCH carrier in the initial BSIC identification procedure.

 $T_{\text{re-confirm},GSM}$ indicates the maximum time allowed for the re-confirmation of the BSIC of one GSM cell in the BSIC re-confirmation procedure.

The UE shall be able to decode a BSIC within a measurement gap when the time difference between the middle of the received GSM synchronisation burst at the UE and the middle of the effective measurement gap is within the limits specified in table 8.1.2.4.5.1.2-1 of TS 36.133 [4].

The UE shall be able to perform BSIC verification at levels down to the reference sensitivity level or reference interference levels as specified in TS 45.005 [16].

This measurement shall be based on the measurement gaps used for Initial BSIC identification as described in section 8.1.2.4.5.1.2 of TS 36.133 [4].

The UE shall continuously attempt to decode the BSIC of SCH on the BCCH carrier of the 8 strongest BCCH carriers of the GSM cells indicated in the Inter-RAT cell info list. The UE shall give priority for BSIC decoding attempts in decreasing signal strength order to BCCH carriers with unknown BSIC. The strongest BCCH carrier is defined as the BCCH carrier having the highest measured GSM carrier RSSI value.

If the BSIC of the GSM BCCH carrier has been successfully decoded the UE shall immediately continue BSIC identification with the next GSM BCCH carrier, in signal strength order, with unknown BSIC. The GSM cell for which the BSIC has been successfully identified shall be moved to the BSIC re-confirmation procedure.

If the UE has not successfully decoded the BSIC of the GSM BCCH carrier within $T_{identify,GSM}$ ms, the UE shall abort the BSIC identification attempts for that GSM BCCH carrier. The UE shall continue to try to perform BSIC identification of the next GSM BCCH carrier in signal strength order. The GSM BCCH carrier for which the BSIC identification failed shall not be re-considered for BSIC identification until BSIC identification attempts have been made for all the rest of the 8 strongest GSM BCCH carriers in the monitored set with unknown BSIC.

 $T_{identify,GSM}$ values are given for a set of reference gap patterns in table 8.1.2.4.5.1.2.1-1 of TS 36.133 [4]. The requirements in the table represent the time required to guarantee at least two attempts to decode the BSIC for one GSM BCCH carrier.

Reported measurements in event triggered measurement reports shall meet the requirements in section TS 36.331 [5].

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH.

The event triggered reporting delay requirement is valid when the UE for each GSM carrier in the monitored set can take the required number of samples during the measurement period $T_{Measurement\ Period,\ GSM}$ (see section 8.1.2.4.5.1 of TS 36.133 [4]).

The event triggered measurement reporting delay for a GSM cell with verified BSIC , measured without L3 filtering shall be less than $2*T_{Measurement\ Period,\ GSM}$, where $T_{Measurement\ Period,\ GSM}$ is defined in section 8.1.2.4.5.1. of TS 36.133 [4] When L3 filtering is used an additional delay can be expected.

The normative reference for this requirement is TS 36.133 [4] clause 8.1.2.4.6 and A.8.11.6

8.11.6.4 Test description

8.11.6.4.1 Initial conditions

Test Environment: Normal, as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator), AWGN noise source and Fader to the UE antenna connectors as shown in TS 36.508 [7] Annex A Figure A.25.
- 2. The general test parameter settings are set up according to Table 8.11.6.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are as defined in clause 8.11.6.4.3.
- 5. There are two E-UTRA TDD cells operating on different frequency and one GSM cell specified in the test. Cell 1 (EUTRA TDD cell on RF channel number 1) is the cell used for registration with the power level set according to Annex C.0 and C.1 for this test.

Table 8.11.6.4-1: General test parameters for Combined E-UTRAN TDD - E-UTRA TDD and GSM cell search. E-UTRA cells in fading; GSM cell in static propagation conditions

Parameter	Unit	Value	Comment
PDSCH parameters (E-		DL Reference Measurement	As specified in section A.1.2.
UTRAN TDD)		Channel R.0 TDD	·
PCFICH/PDCCH/PHICH		DL Reference Measurement	As specified in section A.2.2.
parameters		Channel R.6 TDD	
(E-UTRAN TDD)			
Special subframe		6	As specified in table 4.2-1 in TS 36.211. The
configuration of cell1 and			same configuration in both cells
cell2			
Uplink-downlink configuration		1	As specified in 3GPP TS 36.211 section 4.2
of cell1 and cell2			Table 4.2-2
Gap Pattern Id		0	As specified in 3GPP TS 36.133 section 8.1.2.1.
Active cell		Cell 1	Cell 1 is on E-UTRA RF channel number 1.
Neighbour cells		Cell 2, 3	Cell 2 is on E-UTRA RF channel number 2.
			Cell 3 is on Absolute RF Channel Number 3
			(GSM cell).
CP length		Normal	Applicable to cell 1 and cell 2
E-UTRA Channel Bandwidth	MHz	10	
(BW _{channel})		2022	
E-UTRAN TDD measurement		RSRP	
quantity		<u> </u>	D
Ofn	<u>dB</u>	0	Parameter for A3 and B2 event
Ocn	dB	0	Parameter for A3 event
Hys	dB	0	Parameter for A3 and B2 event
Ofs	dB	0	Parameter for A3 event
Ocs	dB	0	Parameter for A3 event
A3-Offset	<u>dB</u>	-6	
Hysteresis	dB	0	
TimeToTrigger	S	0	1000
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF
Time offset between E-	ms	3 ms	Asynchronous cells
UTRAN TDD cells		00M 0	
Inter-RAT (GSM)		GSM Carrier RSSI	
measurement quantity b2-Threshold-E-UTRA	dBm	-85	RSRP threshold for event B2. This is the
b2-Inresnoid-E-UTRA	aBm	-85	
			threshold for E-UTRA in the B2 configuration. E- UTRA serving cell RSCP is below this
			throughout the test to account for measurement
			accuracy and fading
b2-Threshold-GERAN	dBm	-80	GSM Carrier RSSI threshold for event B2.
Monitored GSM cell list size		6 GSM neighbours including	List of GSM cells provided before T2 starts.
		ARFCN 3	
T1	S	5	
T2	S	10	

8.11.6.4.2 Test procedure

This test scenario comprised of 2 E-UTRA TDD cells operating on different frequency, and 1 GSM cell. The test consists of 2 successive time periods, with time duration T1 and T2. In the measurement control information it is indicated to the UE that event-triggered reporting with Event A3 and B2 shall be used. At T1 the UE is camped on to Cell 1.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to T1 in Table 8.11.6.5-1 and Table 8.11.6.5-2. T1 starts.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.

- 5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 8.11.6.5-1 and Table 8.11.6.5-2.
- 6. UE shall transmit a MeasurementReport message triggered by event A3 and B2. If the overall delays measured from the beginning of time period T2 is less than 7682 ms for event A3 report then the number of successful tests is increased by one. If the UE fails to report the event A3 within the overall delays measured requirement then the number of failure tests is increased by one. If the overall delays measured from the beginning of time period T2 is less than [7202] ms for event B2 report then the number of successful tests is increased by one. If the UE fails to report the event B2 within the overall delays measured requirement then the number of failure tests is increased by one.
- 7. After the SS receives the MeasurementReport messages in step 6 or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
- 8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop. The SS shall set a different BSIC on Cell 3, as the previous timing information of Cell 3 is invalid in the UE for the next iteration of the test procedure loop.
- 9. After the RRC connection release, the SS:
 - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [7] clause 4.5.3A, or
 - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [7] clause 5.2A.2.
- 10. Repeat step 2-9 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

8.11.6.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

[FFS]

8.11.6.5 Test requirement

Tables 8.11.6.5-1 and 8.11.6.5-2 define the primary level settings including test tolerances for two E-UTRAN TDD cells and one GSM cell.

Table 8.11.6.5-1: Cell specific test parameters for Combined E-UTRAN TDD - E-UTRA TDD and GSM cell search. E-UTRA cells in fading; GSM cell in static propagation conditions (cell1 and cell2)

Parameter	Unit	Cell 1		Cel	II 2
		T1 T2		T1	T2
E-UTRA RF Channel		1		2)
Number					
BW _{channel}	MHz	10)	1	0
OCNG Patterns		OP.1	TDD	OP.2	TDD
defined in D.2.1 (OP.1					
TDD) and in D.2.2					
(OP.2 TDD)					
PBCH_RA	dB				
PBCH_RB	dB				
PSS_RA	dB				
SSS_RA	dB				
PCFICH_RB	dB				
PHICH_RA	dB				
PHICH_RB	dB	0		C)
PDCCH_RA	dB				
PDCCH_RB	dB				
PDSCH_RA	dB				
PDSCH_RB	dB				
OCNG_RA ^{Note 1}	dB				
OCNG_RB ^{Note 1}	dB				

$N_{oc}^{ m Note 3}$	dBm/15 kHz	-98				
RSRP Note 4	dBm/15 kHz	-94+TT	-94+TT	-Infinity	-91+TT	
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	dB	4+TT	4+TT	-Infinity	7+TT	
SCH_RP Note 4	dBm/15 kHz	-94+TT	-94+TT	-Infinity	-91+TT	
\hat{E}_s/N_{oc}	dB	4+TT	4+TT	-Infinity	7+TT	
Propagation Condition		ETI	J70	ETI	J70	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 3: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{ac} to be fulfilled.

Note 4: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.11.6.5-2: Cell specific test parameters for Combined E-UTRAN TDD - E-UTRA TDD and GSM cell search. E-UTRA cells in fading; GSM cell in static propagation conditions (cell3)

Parameter	Unit	Cell 3		
		T1	T2	
Absolute RF Channel Number		ARFCN3		
RXLEV	dBm	-Infinity	-75+TT	
GSM BSIC		N/A	Valid	

The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement for Event A3 is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_inter}$

$$T_{\text{Identify_Inter}} = T_{\text{Basic_Identify_Inter}} \cdot \frac{480}{T_{\text{Interl}}} \cdot N_{\text{freq}} \quad ms$$

Where:

 $T_{Basic_Identify_Inter} = 480$ ms. It is the time period used in the inter frequency equation where the maximum allowed time for the UE to identify a new TDD inter-frequency cell is defined.

 T_{inter1} =60ms

 $N_{freq}=2$.

TTI insertion uncertainty = 2 ms

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 7682ms from the beginning of time period T2 (note: this gives a total of 7680 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

The overall delays measured test requirement for Event B2 is:

The delay for GSM cell identification with BSIC verified is the sum of the event triggered measurement reporting delay and the initial BSIC identification delay.

The event triggered measurement reporting delay = $2*T_{Measurement\ Period,\ GSM} = 2*N_{freq}*480ms = 1920ms$.

Initial BSIC identification delay = [5280] ms, when one carrier frequency other than GSM is monitored in the gaps (table 8.1.2.4.5.1.2.1-1 of TS 36.133 [4]).

The UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than [7202]ms from the beginning of time period T2 (note: this gives a total of [7200] ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

9 Measurement Performance Requirements

When the UE is in RRC_CONNECTED state on a cell, physical layer measurements as defined in TS 36.214 [12] clause 5 are initiated and reported to higher layers. To initiate a specific measurement, the System Simulator sends a 'RRC Connection Reconfiguration message' to the UE including a measurement ID and type, a command (setup, modify, release), the measurement objects, the measurement quantity, the reporting quantities and the reporting criteria (periodical/event-triggered), the physical layer measurement process takes place. In this process when the reporting criteria are fulfilled the UE sends a 'Measurement Report message' to the System Simulator including the measurement ID and the results. The reporting criteria that trigger the UE to send a 'Measurement Report message' to the System Simulator is periodical as defined in TS 36.331 [5] clause 5.5.4. The physical layer measurements succeed only if the performance results in terms of accuracy are within the specified limits.

Since the UE reference sensitivity requirements are different depending on supported band, this is noted in each case with definition of the range Io for each frequency band.

The accuracy requirements in this clause are applicable for AWGN radio propagation conditions and assume independent interference (noise) at each receiver antenna port.

The reported measurement results after layer 1 filtering shall be an estimate of the average value of the measured quantity over the measurement period.

The accuracy requirements are valid for the reported measurement results after layer 1 filtering.

Unless explicitly stated:

- In state RRC_CONNECTED
- Reported measurements shall be within defined range in 90 % of the cases.
- Measurement channel is as defined in Annex A. This measurement channel is used both in active cell and cells to be measured.
- The reference channels assume transmission of PDSCH with a maximum number of 5 HARQ transmissions unless otherwise specified.
- SS transmits PDSCH via PDCCH DCI format 1A for C_RNTI to transmit the DL RMC according to Annex A1. The SS sends downlink MAC padding bits on the DL RMC.
- Uplink is configured according to Annex A.3.
- Propagation condition is AWGN as defined in Annex B.
- Physical channels used as defined in Annex C.
- Cell 1 is the active cell.
- Single task reporting.
- Power control is active.

9.1 RSRP

9.1.1 FDD Intra frequency RSRP Accuracy

9.1.1.1 FDD Intra Frequency Absolute RSRP Accuracy

9.1.1.1.1 Test purpose

To verify that the FDD intra-frequency absolute RSRP measurement accuracy is within the specified limit for all bands.

9.1.1.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

9.1.1.1.3 Minimum conformance requirements

The absolute accuracy of RSRP is defined as the RSRP measured from a cell on the same frequency as that of the serving cell.

The accuracy requirements in table 9.1.1.1.3-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

Conditions defined in 36.101 Section 7.3 for reference sensitivity are fulfilled.

RSRP|dBm≥ -127 dBm for Bands 1, 4, 6, 10, 11, 18, 19, 21, 24, 33, 34, 35, 36, 37, 38, 39,, 40, 42, 43

RSRP|dBm≥ -126 dBm for Bands 9, 41

 $RSRP|_{dBm} \ge -125 dBm$ for Bands 2, 5, 7,

 $RSRP|_{dBm} \ge -124 \ dBm$ for Bands 3, 8, 12, 13, 14, 17, 20.

Table 9.1.1.1.3-1: RSRP FDD Intra frequency absolute accuracy

Parameter	Unit	Accura	cy [dB]		Condi	tions ¹	
		Normal	Extreme	Bands 1, 4, 6,	Bands 2, 5, 7,	Bands 3, 8, 12,	Band 9, 41
		condition	condition	10, 11, 18, 19,		13, 14, 17, 20	
				21, 24, 33, 34,			
				35, 36, 37, 38,			
				39, 40, 42, 43			
				lo	lo	lo	lo
RSRP for	dBm	±6	±9	-	-119dBm/15kHz	-	-
Ês/lot ≥ -6				121dBm/15kHz	70dBm/	118dBm/15kHz	120dBm/15kHz
dB				70dBm/	BW _{Channel}	70dBm/	70dBm/
				BW _{Channel}		BW _{Channel}	BW _{Channel}
RSRP for	dBm	±8	±11	-70dBm/	-70dBm/	-70dBm/	-70dBm/
Ês/lot ≥ -6				BW _{Channel}	BW _{Channel}	BW _{Channel}	BW _{Channel}
dB				50dBm/	50dBm/	50dBm/	50dBm/
				BW _{Channel}	BW _{Channel}	BW _{Channel}	BW _{Channel}]
Note: Io is a	ssume	d to have cor	nstant EPRI	E across the ban	dwidth.		

The reporting range of RSRP is defined from -140 dBm to -44 dBm with 1 dB resolution.

The mapping of measured quantity is defined in Table 9.1.1.1.3-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 9.1.1.1.3-2: RSRP measurement report mapping

Reported value	Measured quantity value	Unit
RSRP_00	RSRP < -140	dBm
RSRP_01	-140 ≤ RSRP < -139	dBm
RSRP_02	-139 ≤ RSRP < -138	dBm
	•••	
RSRP_95	-46 ≤ RSRP < -45	dBm
RSRP_96	-45 ≤ RSRP < -44	dBm
RSRP_97	-44 ≤ RSRP	dBm

The normative reference for this requirement is TS 36.133 [4] clause 9.1.2.1, clause 9.1.4 and A.9.1.1.

9.1.1.1.4 Test description

9.1.1.4.1 Initial conditions

Test Environment: Normal, TL/VL, TL/VH, TH/VL, TH/VH; as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.20.
- 2. Propagation conditions are set according to Annex B clause B.0.
- 3. Message contents are defined in clause 9.1.1.1.4.3.
- 4. All cells are in the same carrier frequency. Cell 1 is the serving cell and Cell 2 is the target cell. Cell 1 is the cell used for connection setup with the power levels set according to Annex C.0 and C.1 for this test.

9.1.1.4.2 Test procedure

- 1. Ensure that the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to Table 9.1.1.1.5-2 as appropriate. Propagation conditions are set according to Annex B clause B.1.1.
- 3. SS shall transmit an RRCConnectionReconfiguration message on Cell 1.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. UE shall transmit periodically MeasurementReport messages.
- 6. SS shall check RSRP reported value in MeasurementReport messages. The RSRP value of Cell 2 reported by the UE is compared to the actual RSRP value according to Table 9.1.1.1.5-3.
- 7. SS shall check the MeasurementReport messages transmitted by the UE until the confidence level according to Tables G.2.3-1 in Annex G.2 is achieved.
- 8. Repeat step 1-7 for each sub-test in Table 9.1.1.1.5-2 as appropriate.

9.1.1.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 9.1.1.1.4.3-1: Common Exception messages for RSRP FDD Intra frequency absolute accuracy test requirement

Default Message Contents				
Common contents of system information				
blocks exceptions				
Default RRC messages and information	Table H.3.1-1			
elements contents exceptions	Table H.3.5-1			
	Table H.3.5-3			

Table 9.1.1.1.4.3-2: *MeasResults*: Additional RSRP FDD Intra frequency absolute accuracy test requirement

Derivation Path: 36.331 clause 6.3.5				
Information Element	Value/remark	Comment	Condition	
MeasResults ::= SEQUENCE {				
measld	1	Identifies the measurement id for the reporting being performed		
measResultServCell SEQUENCE {				
rsrpResult		Set according to specific test		
rsrqResult	Not present			
}				
measResultNeighCells CHOICE {				
measResultListEUTRA	MeasResultListEUTRA			
}				
}				

Table 9.1.1.1.4.3-3: MeasResultListEUTRA: Additional RSRP FDD Intra frequency absolute accuracy test requirement

Information Element	Value/remark	Comment	Condition	
MeasResultListEUTRA::= SEQUENCE (SIZE				
(1maxCellReport)) OF SEQUENCE {				
physCellId	PhysicalCellIdentity			
measResult SEQUENCE {				
rsrpResult		Set according to specific test		
rsrqResult	Not present			
}				
}				

9.1.1.1.5 Test requirement

Table 9.1.1.1.5-2 defines the primary level settings including test tolerances for all tests.

Each RSRP FDD intra-frequency relative accuracy test shall meet the reported values test requirements in table 9.1.1.1.5-3.

Table 9.1.1.1.5-1: Void

Table 9.1.1.1.5-2: RSRP FDD Intra frequency absolute accuracy test parameters

	Doromotor	Unit	Tes	st 1	Tes	Test 2		Test 3	
	Parameter	Onit	Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2	
	Channel Number		1		1		1		
BW _{channel}		MHz	1	0	10	0	10	0	
Measurement		n_{PRB}	22—27		22—27		22-	-27	
PDSCH Refer channel define	ence measurement ed in A.1.1		R.0 FDD	-	R.0 FDD	-	R.0 FDD	-	
PDSCH alloca	ation	n_{PRB}	13—36	-	13—36	-	13—36	-	
PDCCH/PCFI	CH/PHICH Reference							I.	
measurement A.2.1	channel defined in		R.6 I	FDD	R.6 F	-DD	R.6 F	-DD	
	ns defined in D.1.1		OP.1	OP.2	OP.1	OP.2	OP.1	OP.2	
	nd D.1.2 (OP.2 FDD)		FDD	FDD	FDD	FDD	FDD	FDD	
PBCH_RA	,								
PBCH_RB									
PSS_RA									
SSS_RA									
PCFICH_RB									
PHICH_RA PHICH_RB		dB	0	0	0	0	0	0	
PDCCH_RA		uБ	0	0	0	0	0	0	
PDCCH_RB									
PDSCH_RA									
PDSCH_RB									
OCNG RA ^{Note}	91								
OCNG_RB ^{Note}	91								
∖ / Note2	Bands 1, 4, 6, 10, 11, 18, 19, 21 and 24		-106.7		-88.0		-116.0		
$N_{oc}^{ m Note2}$	Bands 2, 5, 7 and 17	dBm/15 kHz					-114.0		
	Bands 3, 8, 12, 13,						-113.0		
	14 and 20								
	Band 9			1			-115.0		
$\hat{\mathbf{E}}_{\mathrm{s}}/\mathbf{I}_{\mathrm{ot}}$		dB	1.88	-4.97	1.88	-4.97	0.09	-4.96	
	Bands 1, 4, 6, 10, 11, 18, 19, 21 and 24						-113.0	-116.2	
RSRP ^{Note3}	Bands 2, 5, 7 and 17	dBm/15 kHz	-100.7	-104.7	-82.0	-86.0	-111.0	-114.2	
	Bands 3, 8, 12, 13,						-110.0	-113.2	
	14 and 20 Band 9						-112.0	-115.2	
	Bands 1, 4, 6,10, 11,			1		I	-82		
	18, 19, 21 and 24								
Io ^{Note3}	Bands 2, 5, 7 and 17	dBm/9 MHz	-70	.75	-52	.05	-80	.25	
-	Bands 3, 8, 12, 13,			=	-32.03		-79.25		
	14 and 20 Band 9						-81.25		
\hat{E}_s/N_{oc}	Dana o	dP	6.0	2.0	6.0	2.0			
- ,		dB	6.0	2.0	6.0	2.0	3.0	-0.2	
Propagation c Note 1: OC	ondition NG shall be used such th	- 	AW fully allege		AW		AW ittad nawar		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and lo levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 9.1.1.1.5-3: RSRP FDD Intra frequency absolute accuracy requirements for the reported values

	Test 1	Test 2	Test 3				
	All bands	All bands	Bands 1, 4, 6, 10, 11, 18, 19 21 and 24	Bands 2, 5, 7, and 17	Bands 3, 8, 12, 13, 14, 20	Band 9	
Normal Conditions							
Lowest reported value (Cell 2)	RSRP_29	RSRP_45	RSRP_17	RSRP_19	RSRP_20	RSRP_18	
Highest reported value (Cell 2)	RSRP_43	RSRP_64	RSRP_32	RSRP_34	RSRP_35	RSRP_33	
Extreme Conditions							
Lowest reported value (Cell 2)	RSRP_26	RSRP_42	RSRP_14	RSRP_16	RSRP_17	RSRP_15	
Highest reported value (Cell 2)	RSRP_46	RSRP_67	RSRP_35	RSRP_37	RSRP_38	RSRP_36	

9.1.1.2 FDD Intra Frequency Relative Accuracy of RSRP

9.1.1.2.1 Test purpose

To verify that the FDD intra-frequency relative accuracy measurement of RSRP is within the specified limit for all bands.

9.1.1.2.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

9.1.1.2.3 Minimum conformance requirements

The relative accuracy of RSRP is defined as the RSRP measured from one cell compared to the RSRP measured from another cell on the same frequency.

The accuracy requirements in table 9.1.1.2.3-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

Conditions defined in 36.101 Section 7.3 for reference sensitivity are fulfilled.

RSRP1,2 $|_{dBm} \ge -126$ dBm for Bands 9, 41,

RSRP1,2 $|_{dBm} \ge -125$ dBm for Bands 2, 5, 7,

RSRP1,2 $|_{dBm} \ge -124 \text{ dBm}$ for Bands 3, 8, 12, 13, 14, 17, 20

Table 9.1.1.2.3-1: RSRP FDD Intra frequency relative accuracy

Parameter	Unit	Accura	cy [dB]		Condi	tions¹	
		Normal	Extreme	Bands 1, 4, 6,	Bands 2, 5, 7,	Bands 3, 8, 12,	Bands 9, 41
		condition	condition	10, 11, 18, 19,		13, 14, 17, 20	
				21, 24, 33, 34,			
				35, 36, 37, 38,			
				39, 40, 42, 43			
				lo	lo	lo	lo
RSRP for	dBm	±2	±3	-	-	-	-
Ês/lot > -3				121dBm/15kHz	119dBm/15kHz	118dBm/15kHz	120dBm/15kHz
dB				50dBm/	50dBm/	50dBm/	50dBm/
				BW _{Channel}	BW _{Channel}	BW _{Channel}	BW Channel
RSRP for	dBm	±3	±3	-	-	-	-
Ês/lot ≥ -6				121dBm/15kHz	119dBm/15kHz	118dBm/15kHz	120dBm/15kHz
dB				50dBm/	50dBm/	50dBm/	50dBm/
				BW _{Channel}	BW _{Channel}	BW _{Channel}	BW _{Channel}

Note 1: Io is assumed to have constant EPRE across the bandwidth.

Note 2: The parameter £s/lot is the minimum £s/lot of the pair of cells.to which the requirement applies.

The reporting range of RSRP is defined from -140 dBm to -44 dBm with 1 dB resolution.

The mapping of measured quantity is defined in Table 9.1.1.1.3-2. The range in the signalling may be larger than the guaranteed accuracy range.

The normative reference for this requirement is TS 36.133 [4] clause 9.1.2.2, clause 9.1.4 and A.9.1.1.

9.1.1.2.4 Test description

9.1.1.2.4.1 Initial conditions

Test Environment: Normal, TL/VL, TL/VH, TH/VL, TH/VH; as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- Connect the SS and AWGN noise source to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.20.
- 2. Propagation conditions are set according to Annex B clause B.0.
- 3. Message contents are defined in clause 9.1.1.2.4.3.
- 4. All cells are in the same carrier frequency. Cell 1 is the serving cell and Cell 2 is the target cell. Cell 1 is the cell used for connection setup with the power levels set according to Annex C.0 and C.1 for this test.

9.1.1.2.4.2 Test procedure

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to Table 9.1.1.2.5-2 as appropriate. Propagation conditions are set according to Annex B clause B.1.1.
- 3. SS shall transmit an RRCConnectionReconfiguration message on cell.
- $4.\ The\ UE\ shall\ transmit\ RRCConnection Reconfiguration Complete\ message.$
- 5. UE shall transmit periodically MeasurementReport messages.
- 6. SS shall check the RSRP value of Cell 1 and Cell 2 in MeasurementReport messages. The reported RSRP value for Cell 2 is compared to the reported RSRP value for Cell 1 for each MeasurementReport message according to Table 9.1.1.2.5-3.

- 7. SS shall check the MeasurementReport messages transmitted by the UE until the confidence level according to Tables G.2.3-1 in Annex G.2 is achieved.
- 8. Repeat step 1-7 for each sub-test in Table 9.1.1.2.5-2 as appropriate.

9.1.1.2.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 9.1.1.2.4.3-1: Common Exception messages for RSRP FDD Intra frequency relative accuracy test requirement

Default Message Contents					
Common contents of system information blocks exceptions					
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.5-1 Table H.3.5-3				

Table 9.1.1.2.4.3-2: *MeasResults*: Additional RSRP FDD intra frequency relative accuracy test requirement

Information Element	Value/remark	Comment	Condition	
MeasResults ::= SEQUENCE {				
measld	1	Identifies the measurement id for the reporting being performed		
measResultServCell SEQUENCE {				
rsrpResult		Set according to specific test		
rsrqResult	Not present			
measResultNeighCells CHOICE {				
measResultListEUTRA	MeasResultListEUTRA			
}				

Table 9.1.1.2.4.3-3: MeasResultListEUTRA: Additional RSRP FDD intra frequency relative accuracy test requirement

Derivation Path: 36.331 clause 6.3.5				
Information Element	Value/remark	Comment	Condition	
MeasResultListEUTRA::= SEQUENCE (SIZE (1maxCellReport)) OF SEQUENCE {				
physCellId	PhysicalCellIdentity			
measResult SEQUENCE {				
rsrpResult		Set according to specific test		
rsrqResult	Not present			
}				
]				

9.1.1.2.5 Test requirement

Table 9.1.1.2.5-2 defines the primary level settings including test tolerances for all tests.

Each RSRP FDD intra-frequency relative accuracy test shall meet the RSRP accuracy requirements in table 9.1.1.2.5-3.

Table 9.1.1.2.5-1: Void

Table 9.1.1.2.5-2: RSRP FDD Intra frequency relative accuracy test parameters

Parameter	Unit	Test 1 Test 2		t 2	Test 3		
Parameter	Onit	Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2

E-UTRA RF CI	hannel Number		1		1		1	
BW _{channel}		MHz	1	0	10	0	10	
Measurement	bandwidth	n_{PRB}	22-	-27	22—27		22—27	
PDSCH Reference	ence measurement d in A.1.1		R.0 FDD	-	R.0 FDD	-	R.0 FDD	-
PDSCH allocation		$n_{{\scriptscriptstyle PRB}}$	13—36	-	13—36	-	13—36	-
PDCCH/PCFIC	CH/PHICH Reference			I.		I.		I .
	channel defined in		R.6 I	FDD	R.6 F	FDD	R.6 I	FDD
A.1.2.1	s defined in D.1.1		OD 1	OD 2	OD 1	OP.2	OD 1	OP.2
	nd D.1.2 (OP.2 FDD)		OP.1 FDD	OP.2 FDD	OP.1 FDD	FDD	OP.1 FDD	FDD
PBCH_RA	(01 12 12 12 1							
PBCH_RB								
PSS_RA								
SSS_RA								
PCFICH_RB								
PHICH_RA			_	_	_	_	_	_
PHICH_RB		dB	0	0	0	0	0	0
PDCCH_RA								
PDCCH_RB								
PDSCH_RA							1	
PDSCH_RB	1							
OCNG_RANote	1							
OCNG_RB ^{Note}								
Note2	Bands 1, 4, 6, 10, 11, 18, 19, 21 and 24				00 -88.00	-88.00	-116.00	
$N_{oc}^{ m Note2}$	Bands 2, 5, 7, 17	dBm/15 kHz	-106.00	00 -106.00			-114.00 -113.00	
	Bands 3, 8, 12, 13, 14 and 20							
	Band 9						-115	5.00
$\hat{\mathrm{E}}_{_{\mathrm{s}}}/\mathrm{I}_{_{\mathrm{ot}}}$		dB	1.88	-4.97	1.88	-4.97	-0.01	-4.76
	Bands 1, 4, 6,10, 11, 18, 19, 21 and 24						-113.00	-116.00
RSRP ^{Note3}	Bands 2, 5, 7 and 17	dBm/15 kHz	-100.00	-104.00	-82.00	-86.00	-111.00	-114.00
KSKP	Bands 3, 8, 12, 13,	UDIII/13 KHZ	-100.00	-104.00	-62.00	-00.00	-110.00	-113.00
	14 and 20 Band 9						-112.00	-115.00
	Bands 1, 4, 6, 10, 11, 18, 19, 21 and						-82	•
Io ^{Note3}	24 Bands 2, 5, 7 and 17	dBm/9 MHz	-70.05	-70.05	-52.05	-52.05	-80	20
	Bands 3, 8, 12, 13,	GDITI/O IVII IZ	7 0.00	7 0.00	02.00	02.00	-80.20 -79.20	
	14 and 20 Band 9						-81	
\hat{E}_s/N_{oc}	Ipana a	dB	6.00	1.00	6.00	1.00	3.00	0.00
Propagation co	ondition	-	AW	GN	AW	GN	AW	GN
spagation oc	711010011	l	, , , , ,	<u></u>	, , , , , ,	U. 1	, , , , , , ,	<u> </u>

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and lo levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 9.1.1.2.5-3: RSRP FDD Intra frequency relative accuracy requirements for the reported values

	Test 1	Test 2	Test 3							
	All bands	All bands	Bands 1, 4, 6, 10, 11,18 19,21 and 24	Bands 2, 5, 7 and 17	Bands 3, 8, 12,13 and 20	Band 9				
Normal Conditions										
Lowest reported value (Cell 2)	RSRP_x-9	RSRP_x-9	RSRP_x-8	RSRP_x-8	RSRP_x-8	RSRP_x-8				
Highest reported value (Cell 2)	RSRP_x+1	RSRP_x+1	RSRP_x+2	RSRP_x+2	RSRP_x+2	RSRP_x+2				
Extreme Conditions										
Lowest reported value (Cell 2) RSRP_x-9 RSRP_x-9 RSRP_x-8 RSRP_x-8 RSRP_x-8 RSRP_x-8										
Highest reported value (Cell 2)	RSRP_x+1	RSRP_x+1	RSRP_x+2	RSRP_x+2	RSRP_x+2	RSRP_x+2				
RSRP_x is the reported value of 0	RSRP_x is the reported value of Cell 1									

9.1.2 TDD Intra frequency RSRP Accuracy

9.1.2.1 TDD Intra Frequency Absolute RSRP Accuracy

9.1.2.1.1 Test purpose

To verify that the TDD intra-frequency absolute RSRP measurement accuracy is within the specified limit for all bands.

9.1.2.1.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

9.1.2.1.3 Minimum conformance requirements

The absolute accuracy of RSRP is defined as the RSRP measured from a cell on the same frequency as that of the serving cell.

The accuracy requirements in Table 9.1.2.1-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

Conditions defined in 36.101 Section 7.3 for reference sensitivity are fulfilled.

RSRP|dBm≥ -127 dBm for Bands 1, 4, 6, 10, 11, 18, 21, 24, 33, 34, 35, 36, 37, 38, 39, 40, 42, 43

RSRP|dBm≥ -126 dBm for Bands 9, 41

 $RSRP|_{dBm} \ge -125 dBm$ for Bands 2, 5, 7,

 $RSRP|_{dBm} \ge -124 \ dBm \ for \ Bands \ 3, \ 8, \ 12, \ 13, \ 14, \ 17, \ 20.$

Table 9.1.2.1.3-1: RSRP TDD Intra frequency absolute accuracy

Parameter	Unit	Accura	cy [dB]		Cond	itions¹	
		Normal condition	Extreme condition	Bands 1, 4, 6, 10, 11, 18, 19, 21, 24, 33, 34, 35, 36, 37, 38, 39, 40, 42, 43	Bands 2, 5, 7	Bands 3, 8, 12, 13, 14, 17, 20	Bands 9, 41
				lo	lo	lo	lo
RSRP for Ês/lot ≥	dBm	±6	±9	-	-	-	-
-6 dB				121dBm/15kHz	119dBm/15kHz	118dBm/15kHz	120dBm/15kHz
				70dBm/	70dBm/	70dBm/	70dBm/
				BW Channel	BW Channel	BW _{Channel}	BW Channel
RSRP for Ês/lot ≥	dBm	±8	±11	-70dBm/	-70dBm/	-70dBm/	-70dBm/
-6 dB				BW _{Channel}	BW _{Channel}	BW _{Channel}	BW _{Channel}
				50dBm/	50dBm/	50dBm/	50dBm/
				BW _{Channel}	BW _{Channel}	BW _{Channel}	BW _{Channel}
Note: lo is assume	d to hav	e constant EP	RE across th	e bandwidth.			

The reporting range of RSRP is defined from -140 dBm to -44 dBm with 1 dB resolution.

The mapping of measured quantity is defined in Table 9.1.2.1.3-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 9.1.2.1.3-2: RSRP measurement report mapping

Reported value	Measured quantity value	Unit
RSRP_00	RSRP < -140	dBm
RSRP_01	-140 ≤ RSRP < -139	dBm
RSRP_02	-139 ≤ RSRP < -138	dBm
RSRP_95	-46 ≤ RSRP < -45	dBm
RSRP_96	-45 ≤ RSRP < -44	dBm
RSRP_97	-44 ≤ RSRP	dBm

The normative reference for this requirement is TS 36.133 [4] clause 9.1.2.1, clause 9.1.4 and A.9.1.2.

9.1.2.1.4 Test description

9.1.2.1.4.1 Initial conditions

Test Environment: Normal, TL/VL, TL/VH, TH/VL, TH/VH; as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.20.
- 2. Propagation conditions are set according to Annex B clause B.0.
- 3. Message contents are defined in clause 9.1.2.1.4.3.
- 4. All cells are in the same carrier frequency. Cell 1 is the serving cell and Cell 2 is the target cell. Cell 1 is the cell used for connection setup with the power levels set according to Annex C.0 and C.1 for this test.

9.1.2.1.4.2 Test procedure

- 1. Ensure that the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to Table 9.1.2.1.5-2 as appropriate. Propagation conditions are set according to Annex B clause B.1.1.

- 3. SS shall transmit an RRCConnectionReconfiguration message on cell 1.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. UE shall transmit periodically MeasurementReport messages.
- 6. SS shall check RSRP reported value in MeasurementReport messages. The RSRP value of Cell 2 reported by the UE is compared to actual RSRP value according to Table 9.1.2.1.5-3.
- 7. SS shall check the MeasurementReport message transmitted by the UE until the confidence level according to Tables G.2.3-1 in Annex G.2 is achieved.
- 8. Repeat step 1-7 for each sub-test in Table 9.1.2.1.5-2 as appropriate.

9.1.2.1.4.3 Message contents

Message contents are according to TS 36.508 [7] values 4.6 with the following exceptions:

Table 9.1.2.1.4.3-1: Common Exception message for RSRP TDD intra frequency absolute accuracy test requirement

Default Message Contents					
Common contents of system information					
blocks exceptions					
Default RRC messages and information	Table H.3.1-1				
elements contents exceptions	Table H.3.5-1				
·	Table H.3.5-3				

Table 9.1.2.1.4.3-2: *MeasResults*: Additional RSRP TDD intra frequency absolute accuracy test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1		
measResultServCell SEQUENCE {			
rsrpResult	INTEGER(097)		
rsrqResult	Not present		
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
}			
}			

Table 9.1.2.1.4.3-3: MeasResultListEUTRA: Additional RSRP TDD intra frequency absolute accuracy test requirement

Information Element	Value/remark	Comment	Condition
MeasResultsListEUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId	PhysCellId of Cell 2	INTEGER (0503)	
measResult SEQUENCE {			
rsrpResult			
rsrqResult	Not present		
}			
1}			

9.1.2.1.5 Test requirement

Table 9.1.2.1.5-2 defines the primary level settings including test tolerances for all tests.

Each RSRP TDD intra-frequency absolute accuracy test shall meet the reported values test requirements in table 9.1.2.1.5-3.

Table 9.1.2.1.5-1: Void

Table 9.1.2.1.5-2: RSRP TDD Intra frequency absolute accuracy test parameters

Parameter		l lmit	Tes	st 1	Tes	Test 2		Test 3	
		Unit	Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2	
E-UTRA RF C	hannel Number		1		1		1		
BW _{channel}	Note1	MHz	1		10		10		
Special subfra	me configuration ^{Note1}		6		6		6		
Uplink/downlin	Uplink/downlink configuration Note1		1 1		1		1		
Measurement		n_{PRB}	22–	–27	22–	–27	22–	-27	
PDSCH Reference measurement channel defined in A.1.2			R.0 TDD	-	R.0 TDD	-	R.0 TDD	-	
PDSCH alloca	tion	n_{PRB}	13—36	-	13—36	-	13—36	-	
PDCCH/PCFIG	CH/PHICH Reference					ı		I	
measurement A.2.2	channel defined in		R.6	TDD	R.6	TDD	R.6	ΓDD	
	s defined in D.2.1		OP.1	OP.2	OP.1	OP.2	OP.1	OP.2	
	nd D.2.2 (OP.2 TDD)		TDD	TDD	TDD	TDD	TDD	TDD	
PBCH_RA	,								
PBCH_RB									
PSS_RA									
SSS_RA									
PCFICH_RB									
PHICH_RA									
PHICH_RB		dB	0	0	0	0	0	0	
PDCCH_RA									
PDCCH_RB									
PDSCH_RA									
PDSCH_RB OCNG_RA ^{Note}	2								
OCNG_RB ^{Note}	2								
OCING_RB	Bands 33, 34, 35,								
$N_{oc}^{ m Note3}$	36, 37, 38, 39, 40, 42, 43	dBm/15 kHz	-106.7	-106.7	-88.0	-88.0	-11	6.0	
	Band 41						-11	5.0	
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$	•	dB	1.88	-4.97	1.88	-4.97	0.09	-4.96	
RSRP ^{Note4}	Bands 33, 34, 35, 36, 37, 38, 39, 40, 42, 43	dBm/15 kHz	-100.7	-104.7	-82.0	-86.0	-113	-116.2	
	Band 41						-112	-115.2	
lo ^{Note4}	Bands 33, 34, 35, 36, 37, 38, 39, 40, 42, 43	dBm/9 MHz	-70.75	-70.75	-52.05	-52.05	-82	.52	
	Band 41						-82	.52	
\hat{E}_s/N_{oc}		dB	6	2	6	2	3	-0.20	
Propagation co	ondition	-	AW	GN	AW	GN	AW	GN	
	special subframe and	unlink downlink a							

Note 1: For special subframe and uplink-downlink configurations see Tables 4.2-1 and 4.2-2 in 3GPP TS 36.211.

OCNG shall be used such that both cells are fully allocated and a constant total transmitted power Note 2: spectral density is achieved for all OFDM symbols.

Interference from other cells and noise sources not specified in the test is assumed to be constant over Note 3:

subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

RSRP and lo levels have been derived from other parameters for information purposes. They are not Note 4: settable parameters themselves.

RSRP minimum requirements are specified assuming independent interference and noise at each Note 5:

receiver antenna port.

Table 9.1.2.1.5-3: RSRP TDD Intra frequency absolute accuracy requirements for the reported values

	Test 1	Test 2	Test 3
Normal Conditions			
Lowest reported value (Cell 2)	RSRP_29	RSRP_45	RSRP_17
Highest reported value (Cell 2)	RSRP_43	RSRP_64	RSRP_32
Extreme Conditions			
Lowest reported value (Cell 2)	RSRP_26	RSRP_42	RSRP_14
Highest reported value (Cell 2)	RSRP_46	RSRP_67	RSRP_35

9.1.2.2 TDD Intra Frequency Relative Accuracy of RSRP

9.1.2.2.1 Test purpose

To verify that the TDD intra-frequency relative accuracy measurement of RSRP is within the specified limit for all bands.

9.1.2.2.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

9.1.2.2.3 Minimum conformance requirements

The relative accuracy of RSRP is defined as the RSRP measured from one cell compared to the RSRP measured from another cell on the same frequency.

The accuracy requirements in Table 9.1.2.2.3-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

Conditions defined in 36.101 Section 7.3 for reference sensitivity are fulfilled.

 $RSRP1,2|_{dBm} \ge -127 \text{ dBm for Bands } 1, 4, 6, 10, 11, 18, 19, 21, 33, 34, 35, 36, 37, 38, 39, 40, 42, 43$

RSRP1,2 $|_{dBm} \ge -126 \text{ dBm for Bands } 9, 41$

RSRP1,2 $|_{dBm} \ge -125 \text{ dBm}$ for Bands 2, 5, 7,

RSRP1,2 $|_{dBm} \ge -124 \text{ dBm}$ for Bands 3, 8, 12, 13, 14, 17, 20.

Table 9.1.2.2.3-1: RSRP TDD Intra frequency relative accuracy

Parameter	Unit	Accuracy [dB]		Conditions ¹					
		Normal condition	Extreme condition	Bands 1, 4, 6, 10, 11, 18, 19, 21, 24, 33, 34, 35, 36, 37, 38, 39, 40, 42, 43	Bands 2, 5, 7	Bands 3, 8, 12, 13, 14, 17, 20	Bands 9, 41		
				lo	lo	lo	lo		
RSRP for Ês/lot	dBm	±2	±3	-	-	-	-		
> -3 dB				121dBm/15kHz	119dBm/15kHz	118dBm/15kHz	120dBm/15kHz		
				50dBm/	50dBm/	50dBm/	50dBm/		
				BW Channel	BW Channel	BW _{Channel}	BW Channel		
RSRP for Ês/lot ≥	dBm	±3	±3	-	-	-			
-6 dB				121dBm/15kHz	119dBm/15kHz	118dBm/15kHz	120dBm/15kHz		
				50dBm/	50dBm/	50dBm/	50dBm/		
				BW _{Channel}	BW _{Channel}	BW _{Channel}	BW _{Channel}		

Note 1: lo is assumed to have constant EPRE across the bandwidth.

Note 2: The parameter Es/lot is the minimum Es/lot of the pair of cells.to which the requirement applies.

The reporting range of RSRP is defined from -140 dBm to -44 dBm with 1 dB resolution.

The mapping of measured quantity is defined in Table 9.1.2.1.3-2. The range in the signalling may be larger than the guaranteed accuracy range.

The normative reference for this requirement is TS 36.133 [4] clause 9.1.2.2, clause 9.1.4 and A.9.1.2.

9.1.2.2.4 Test description

9.1.2.2.4.1 Initial conditions

Test Environment: Normal, TL/VL, TL/VH, TH/VL, TH/VH; as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS and AWGN noise source to the UE antenna connectors as shown in TS 36.508 [7] Annex A Figure A. 20.
- 2. Propagation conditions are set according to Annex B clause B.0.
- 3. Message contents are defined in clause 9.1.2.2.4.3.
- 4. All cells are in the same carrier frequency. Cell 1 is the serving cell and Cell 2 is the target cell. Cell 1 is the cell used for connection setup with the power levels set according to Annex C.0 and C.1 for this test.

9.1.2.2.4.2 Test procedure

- 1. Ensure that the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to Table 9.1.2.2.5-2 as appropriate. Propagation conditions are set according to Annex B clause B.1.1.
- 3. SS shall transmit an RRCConnectionReconfiguration message on Cell 1.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. UE shall transmit periodically MeasurementReport messages.
- 6. SS shall check the reported RSRP value of Cell 1 and Cell 2 in MeasurementReport messages. The reported RSRP measurement value for Cell 2 is compared to the reported RSRP measurement value for Cell 1 for each MeasurementReport message according to Table 9.1.2.2.5-3.
- 7. SS shall check the MeasurementReport messages transmitted by the UE until the confidence level according to Tables G.2.3-1 in Annex G.2 is achieved.
- 8. Repeat step 1-7 for each sub-test in Table 9.1.2.2.5-2 as appropriate.

9.1.2.2.4.3 Message contents

Message contents are according to TS 36.508 [7] values 4.6 with the following exceptions:

Table 9.1.2.2.4.3-1: Common Exception messages for RSRP TDD intra frequency relative accuracy test requirement

Default Message Contents					
Common contents of system information					
blocks exceptions					
Default RRC messages and information	Table H.3.1-1				
elements contents exceptions	Table H.3.5-1				
·	Table H.3.5-3				

Table 9.1.2.2.4.3-2: *MeasResults*: Additional RSRP TDD intra frequency relative accuracy test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1		
measResultServCell SEQUENCE {			
rsrpResult	INTEGER(097)		
rsrqResult	Not present		
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
}			
}			· ·

Table 9.1.2.2.4.3-3: *MeasResultListEUTRA*: Additional RSRP TDD intra frequency relative accuracy test requirement

Information Element	Value/remark	Comment	Condition
MeasResultsListEUTRA ::= SEQUENCE (SIZE (1maxCellReport)) OF SEQUENCE {			
physCellId	physCellId of Cell2		
measResult SEQUENCE {			
rsrpResult		According to specific test	
rsrqResult	Not present		
}			
]}			

9.1.2.2.5 Test requirement

Table 9.1.2.2.5-2 defines the primary level settings including test tolerances for all tests.

Each RSRP TDD intra-frequency relative accuracy test shall meet the reported values test requirements in table 9.1.2.2.5-3. The mapping of measured quantity is defined in Table 9.1.2.2.5-3. The range in the signalling may be larger than the guaranteed accuracy range.

Table 9.1.2.2.5-1: Void

Table 9.1.2.2.5-2: RSRP TDD Intra frequency relative accuracy test parameters

Cell 1 Cell 2 Cell 1 Cell 2 Cell 1 Cell 2 Cell 1 Cell 2		lavamatav	l lmi4	Tes	st 1	Tes	st 2	Test 3	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$			Unit	Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Special subframe configuration E-UTRA RF Channel Number			1		1				
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	BW _{channel}	BW _{channel}		10		10		10	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	Special subfra	ame configuration Note1		6	3	6	6		;
PDSCH Reference measurement thannel defined in A.1.2 R.0 TDD TD	Uplink/downli	nk configuration Note1		1		1		1	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	Measurement	bandwidth	$n_{\scriptscriptstyle PRB}$	22–	-27	22–	–27	22–	-27
PDCCH/PCFICH/PHICH Reference neasurement channel defined in R.6 TDD				-		-		-	
Reasurement channel defined in R.6 TDD R	PDSCH alloca	ation	$n_{{\scriptscriptstyle PRB}}$	13—36	-	13—36	-	13—36	-
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$				R.6	TDD	R.6	TDD	R.6	TDD
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$									
$ \hat{E}_s/I_{ot} $	PBCH_RA PBCH_RB PSS_RA SSS_RA PCFICH_RB PHICH_RA PHICH_RB PDCCH_RA PDCCH_RB PDSCH_RA PDSCH_RB OCNG_RA ^{Not} OCNG_RB ^{Not}	e2 e2	dB						
RSRP ^{Note4} Bands 33, 34, 35, 36, 37, 38, 39,, 40, 42, 43	30, 37, 30, 39,, 40,		dBm/15 kHz	-106.0	-106.0	-88.0	-88.0	-11	6.0
RSRP ^{Note4} Bands 33, 34, 35, 36, 37, 38, 39,, 40, 42, 43	$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$		dB	1.88	-4.97	1.88	-4.97	-0.01	-4.76
\hat{E}_s/N_{oc}	RSRP ^{Note4}	36, 37, 38, 39,, 40, 42, 43	dBm/15 kHz	-100.0	-104.0	-82.0	-86.0	-113.0	-116.0
dD 0.0 2.0 0.0 0.0	36, 37, 38, 39,, 40, 42, 43		dBm/9 MHz	-70.05	-70.05	-52.05	-52.05	-82	.20
Propagation condition - AWGN AWGN AWGN	\hat{E}_s/N_{oc}		dB	6.0	2.0	6.0	2.0	3.0	0.0
	Propagation of	condition	-	AW	GN	AW	GN	AW	GN

Note 1: For special subframe and uplink-downlink configurations see Tables 4.2-1 and 4.2-2 in 3GPP TS 36.211.

Note 2: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 3: Interference from other cells and noise sources not specified in the test is assumed to be constant over

subcarriers and time and shall be modelled as AWGN of appropriate power for $^{N_{oc}}$ to be fulfilled.

Note 4: RSRP and lo levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 5: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 9.1.2.2.5-3: RSRP TDD Intra frequency relative accuracy requirements for the reported values

	Test 1	Test 2	Test 3		
Normal Conditions					
Lowest reported value (Cell 2)	RSRP_x - 9	RSRP_x - 9	RSRP_x - 8		
Highest reported value (Cell 2)	RSRP_x + 1	RSRP_x + 1	RSRP_x + 2		
Extreme Conditions					
Lowest reported value (Cell 2)	RSRP_x - 9	RSRP_x - 9	RSRP_x - 8		
Highest reported value (Cell 2)	RSRP_x + 1	RSRP_x + 1	RSRP_x + 2		
RSRP_x is the reported value of Cell 1					

9.1.3 FDD Inter frequency RSRP Accuracy

9.1.3.1 FDD - FDD Inter Frequency Absolute RSRP Accuracy

9.1.3.1.1 Test purpose

To verify that the FDD inter-frequency absolute RSRP measurement accuracy is within the specified limit for all bands.

9.1.3.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

9.1.3.1.3 Minimum conformance requirements

The absolute accuracy of RSRP is defined as the RSRP measured from a cell that has different carrier frequency from the serving cell.

The accuracy requirements in table 9.1.3.1.3-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

Conditions defined in 36.101 Section 7.3 for reference sensitivity are fulfilled.

RSRP|dBm≥ -127 dBm for Bands 1, 4, 6, 10, 11, 18, 19, 21, 24, 33, 34, 35, 36, 37, 38, 39, 40, 42, 43

RSRP|dBm≥ -126 dBm for Bands 9, 41

RSRP|dBm \geq -125 dBm for Bands 2, 5, 7,

RSRP|dBm≥ -124 dBm for Bands 3, 8, 12, 13, 14, 17, 20.

Table 9.1.3.1.3-1: RSRP FDD Inter frequency absolute accuracy

Parameter	Unit	Accura	acy [dB]	Conditions ¹				
		Normal condition	Extreme condition	Bands 1, 4, 6, 10, 11, 18, 19, 21, 24, 33, 34, 35, 36, 37, 38, 39, 40, 42, 43	Bands 2, 5, 7,	Bands 3, 8, 12, 13, 14, 17, 20	Bands 9, 41	
				lo	lo	lo	lo	
RSRP for	dBm	±6	±9	-	-	-	-	
Ês/lot ≥ -6				121dBm/15kHz	119dBm/15kHz	118dBm/15kHz	120dBm/15kHz	
dB				70dBm/	70dBm/	70dBm/	70dBm/	
				BW _{Channel}	BW Channel	BW _{Channel}	BW Channel	
RSRP for	dBm	±8	±11	-70dBm/	-70dBm/	-70dBm/	-70dBm/	
Ês/lot ≥ -6 dB				BW _{Channel} 50dBm/	BW _{Channel} 50dBm/	BW _{Channel} 50dBm/	BW _{Channel} 50dBm/	
				BW _{Channel}	BW _{Channel}	BW _{Channel}	BW _{Channel}	
Note: Io is a	Note: Io is assumed to have constant EPRE across the bandwidth.							

The reporting range of RSRP is defined from -140 dBm to -44 dBm with 1 dB resolution.

The mapping of measured quantity is defined in Table 9.1.1.1.3-2. The range in the signalling may be larger than the guaranteed accuracy range.

The normative reference for this requirement is TS 36.133 [4] clause 9.1.3.1, clause 9.1.4 and A.9.1.3.

9.1.3.1.4 Test description

9.1.3.1.4.1 Initial conditions

Test Environment: Normal, TL/VL, TL/VH, TH/VL, TH/VH; as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14.
- 2. Propagation conditions are set according to Annex B clause B.0.
- 3. Message contents are defined in clause 9.1.3.1.4.3.
- 4. Cell 1 and Cell 2 are on the different carrier frequencies. Cell 1 is the serving cell and Cell 2 is the target cell. Cell 1 is the cell used for connection setup with the power levels set according to Annex C.0 and C.1 for this test.

9.1.3.1.4.2 Test procedure

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to Table 9.1.3.1.5-2 for the test interval as appropriate. Propagation conditions are set according to Annex B clause B.1.1
- 3. SS shall transmit an RRCConnectionReconfiguration message on cell.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. UE shall transmit periodically MeasurementReport messages.
- 6. SS shall check RSRP reported value in MeasurementReport messages. The RSRP value of Cell 2 reported by the UE is compared to the actual RSRP according to Table 9.1.3.1.5-3.
- 7. SS shall check the MeasurementReport message transmitted by the UE until the confidence level according to Tables G.2.3-1 in Annex G.2 is achieved.

8. Repeat step 1-7 for each sub-test in Table 9.1.3.1.5-2 as appropriate.

9.1.3.1.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 9.1.3.1.4.3-1: Common Exception messages for RSRP FDD Inter frequency absolute accuracy test requirement

Default Message Contents				
Common contents of system information				
blocks exceptions				
Default RRC messages and information	Table H.3.1-1			
elements contents exceptions	Table H.3.5-2			
	Table H.3.5-3			

Table 9.1.3.1.4.3-2: *MeasResults*: Additional RSRP FDD Inter frequency absolute accuracy test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult	Not present		
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
}			
}			

Table 9.1.3.1.4.3-3: MeasResultListEUTRA: Additional RSRP FDD Inter frequency absolute accuracy test requirement

Information Element	Value/remark	Comment	Condition
MeasResultListEUTRA::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId	PhysicalCellIdentity		
measResult SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult	Not present		
}			
}			

9.1.3.1.5 Test requirement

Table 9.1.3.1.5-2 defines the primary level settings including test tolerances for all tests.

Each RSRP FDD inter-frequency absolute accuracy test shall meet the reported values test requirements in table 9.1.3.1.5-3.

Table 9.1.3.1.5-1: Void

Table 9.1.3.1.5-2: RSRP FDD - FDD Inter frequency absolute accuracy test parameters

Dovometer	I I m i 4	Test 1		Test 2	
Parameter	Unit	Cell 1	Cell 2	Cell 1	Cell 2

E-UTRA RF Ch	nannel Number		1	2	1	2
BW _{channel}		MHz	10	10	10	10
Gap Pattern Id			0	-	0	-
Measurement l		$n_{{\scriptscriptstyle PRB}}$	22—27		22—27	
PDSCH Refere channel define	ence measurement d in A.1.1		R.0 FDD	-	R.0 FDD	-
PDSCH allocat	ion	n_{PRB}	13—36	-	13—36	-
	CH/PHICH Reference channel defined in		R.6 I	-DD	R.6 I	-DD
OCNG Patterns	s defined in D.1.1 d D.1.2 (OP.2 FDD)		OP.1 FDD	OP.2 FDD	OP.1 FDD	OP.2 FDD
PBCH_RA PBCH_RB						
PSS_RA SSS_RA						
PCFICH_RB PHICH_RA						
PHICH_RB PDCCH_RA		dB	0	0	0	0
PDCCH_RB PDSCH_RA						
PDSCH_RB						
OCNG_RANote1						
OCNG_RBNote						
	Bands 1, 4, 6, 10, 11, 18, 19, 21 and 24		-88.95	-88.95	-109.00	-116.00
$N_{oc}^{ m Note2}$	Bands 2, 5, 7, and 17	dBm/15 kHz			-107.00	-114.00
	Bands 3, 8, 12, 13, 14 and 20				-106.00	-113.00
	Band 9				-108.00	-115.00
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$		dB	10.00	10.00	14.00	-5.00
	Bands 1, 4, 6, 10, 11, 18, 19, 21 and 24				-95.00	-121.00
RSRP ^{Note3}	Bands 2, 5, 7 and 17	dBm/15 kHz	-78.95	-78.95	-93.00	-119.00
	Bands 3, 8, 12, 13, 14 and 20				-92.00	-118.00
	Band 9				-94.00	-120.00
	Bands 1, 4, 6, 10, 18, 19, 21 and 24				-67.05	-87.03
Io ^{Note3}	Bands 2, 5, 7, 11, 17	dBm/9 MHz	-50.75	-50.75	-65.05	-85.03
	Bands 3, 8, 12, 13, 14 and 20				-64.05	-84.03
/N	Band 9	15	40.00	40.00	-66.05	-86.03
\hat{E}_s/N_{oc}	Per .	dB	10.00	10.00	14.00	-5.00
Propagation condition		-	AW	GN	AWGN	

Propagation condition

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and lo levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 9.1.3.1.5-3: RSRP FDD Inter frequency absolute accuracy requirements for the reported values

	Test 1	Test 2				
	All bands	Bands 1, 4, 6, 10, 11 18, 19, 21 and 24	Bands 2, 5, 7, 17	Bands 3, 8, 12, 13, 14	Band 9	
Normal Conditions						
Lowest reported value (Cell 2)	RSRP_52	RSRP_12	RSRP_14	RSRP_15	RSRP_13	
Highest reported value (Cell 2)	RSRP_71	RSRP_27	RSRP_29	RSRP_30	RSRP_28	
Extreme Conditions						
Lowest reported value (Cell 2)	RSRP_49	RSRP_09	RSRP_11	RSRP_12	RSRP_10	
Highest reported value (Cell 2)	RSRP_74	RSRP_30	RSRP_32	RSRP_33	RSRP_31	

9.1.3.2 FDD - FDD Inter Frequency Relative Accuracy of RSRP

9.1.3.2.1 Test purpose

To verify that the FDD inter-frequency relative accuracy measurement of RSRP is within the specified limit for all bands.

9.1.3.2.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

9.1.3.2.3 Minimum conformance requirements

The relative accuracy of RSRP in inter frequency case is defined as the RSRP measured from one cell compared to the RSRP measured from another cell on a different frequency.

The accuracy requirements in table 9.1.3.2.3-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

Conditions defined in 36.101 Section 7.3 for reference sensitivity are fulfilled.

 $RSRP1_{dBm} \ge -126 dBm \text{ if } RSRP1 \text{ is on Band 9},$

 $RSRP1|_{dBm} \ge -125 dBm if RSRP1 is on Bands 2, 5, 7,$

 $RSRP1_{dBm} \ge -124 \text{ dBm if RSRP1 is on Bands } 3, 8, 12, 13, 14, 17, 20,$

 $RSRP2|_{dBm} \ge -127 \text{ dBm if RSRP2}$ is on Bands 1, 4, 6, 10, 11, 18, 19, 21, 24, 33, 34, 35, 36, 37, 38, 39, 40 42, 43,

 $RSRP2|_{dBm} \ge -126 \text{ dBm if RSRP2}$ is on Band 9, 41

 $RSRP2|_{dBm} \ge -125 \text{ dBm if RSRP2 is on Bands } 2, 5, 7,$

 $RSRP2|_{dBm} \ge -124 \text{ dBm if RSRP2 is on Bands 3, 8, 12, 13, 14, 17, 20.}$

$$\left| RSRP1 \right|_{dBm} - RSRP2 \Big|_{dBm} \right| \le 27 dB$$

| Channel 1_Io -Channel 2_Io | \leq 20 dB

Table 9.1.3.2.3-1: RSRP FDD Inter frequency relative accuracy

Parameter	Unit	Accura	cy [dB]		Condi	tions¹	
		Normal	Extreme	RSRP is on	RSRP is on	RSRP is on	RSRP is on
		condition	condition	Bands 1, 4, 6,	Bands 2, 5, 7,	Bands 3, 8, 12,	Band 9, 41
				10, 11, 18, 19,		13, 14, 17, 20	
				21, 24, 33, 34,			
				35, 36, 37, 38,			
				39, 40, 42, 43			
				lo	Io	Io	Io
RSRP for	dBm			-121dBm/15kHz	-119dBm/15kHz	-118dBm/15kHz	-120dBm/15kHz
Ës/lot > -		±6	±6	50dBm/	50dBm/	50dBm/	50dBm/
6dB				BW _{Channel}	BW _{Channel}	BW _{Channel}	BW _{Channel}

Note 1: lo is assumed to have constant EPRE across the bandwidth.

Note 2: The parameter Es/lot is the minimum Es/lot of the pair of cells.to which the requirement applies.

The reporting range of RSRP is defined from -140 dBm to -44 dBm with 1 dB resolution.

The mapping of measured quantity is defined in Table 9.1.1.1.3-2. The range in the signalling may be larger than the guaranteed accuracy range.

The normative reference for this requirement is TS 36.133 [4] clause 9.1.3.2, clause 9.1.4 and A.9.1.3.

9.1.3.2.4 Test description

9.1.3.2.4.1 Initial conditions

Test Environment: Normal, TL/VL, TL/VH, TH/VL, TH/VH; as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14.
- 2. Propagation conditions are set according to Annex B clause B.0.
- 3. Message contents are defined in clause 9.1.3.2.4.3.
- 4. Cell 1 and Cell 2 are on the different carrier frequencies. Cell 1 is the serving cell and Cell 2 is the target cell. Cell 1 is the cell used for connection setup with the power levels set according to Annex C.0 and C.1 for this test.

9.1.3.2.4.2 Test procedure

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to Table 9.1.3.2.5-2 for the test interval as appropriate. Propagation conditions are set according to Annex B clause B.1.1.
- 3. SS shall transmit an RRCConnectionReconfiguration message on cell.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. UE shall transmit periodically MeasurementReport messages.
- 6. SS shall check the RSRP value of Cell 1 and Cell 2 in MeasurementReport messages. The reported RSRP value for Cell 2 is compared to the reported RSRP value for Cell 1 for each MeasurementReport message according to Table 9.1.3.2.5-3.
- 7. SS shall check the MeasurementReport messages transmitted by the UE until the confidence level according to Tables G.2.3-1 in Annex G.2 is achieved.
- 8. Repeat step 1-7 for each sub-test in Table 9.1.3.2.5-2 as appropriate.

9.1.3.2.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 9.1.3.2.4.3-1: Common Exception messages for RSRP FDD Inter frequency relative accuracy test requirement

Default Message Contents				
Common contents of system information				
blocks exceptions				
Default RRC messages and information	Table H.3.1-1			
elements contents exceptions	Table H.3.5-2			
· ·	Table H.3.5-3			

Table 9.1.3.2.4.3-2: *MeasResults*: Additional RSRP FDD Inter frequency relative accuracy test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult	Not present		
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
}			
}			

Table 9.1.3.2.4.3-3: MeasResultListEUTRA: Additional RSRP FDD Inter frequency relative accuracy test requirement

Information Element	Value/remark	Comment	Condition
MeasResultListEUTRA::= SEQUENCE (SIZE (1maxCellReport)) OF SEQUENCE {			
physCellId	PhysicalCellIdentity		
measResult SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult	Not present		
}			
}			

9.1.3.2.5 Test requirement

Table 9.1.3.2.5-2 defines the primary level settings including test tolerances for all tests.

Each RSRP FDD inter-frequency relative accuracy test shall meet the reported values test requirements in table 9.1.3.2.5-3.

Table 9.1.3.2.5-1: Void

Table 9.1.3.2.5-2: RSRP FDD - FDD Inter frequency relative accuracy test parameters

Parameter		l lmi4	Tes	st 1	Test 2	
-		Unit	Cell 1	Cell 2	Cell 1	Cell 2
E-UTRA RF C	E-UTRA RF Channel Number		1	2	1	2
BW _{channel}		MHz	10	10	10	10
Measurement	Measurement gap configuration		0	-	0	-
Measurement		$n_{{\it PRB}}$	22-	–27	22–	-27
PDSCH Refer	ence measurement ed in A.1.1		R.0 FDD	-	R.0 FDD	-
PDSCH alloca	ition	n_{PRB}	13—36	-	13—36	-
	CH/PHICH Reference channel defined in		R.6	FDD	R.6 I	-DD
	ns defined in D.1.1		OP.1	OP.2	OP.1	OP.2
	nd D.1.2 (OP.2 FDD)		FDD	FDD	FDD	FDD
PBCH_RA PBCH_RB						
PSS_RA						0
SSS_RA						
PCFICH_RB				0	0	
PHICH_RA						
PHICH RB		dB	0			
PDCCH_RA						
PDCCH_RB						
PDSCH_RA						
PDSCH_RB						
OCNG_RANote1						
OCNG RBNote						
	Bands 1, 4, 6, 10, 11, 18, 19, 21 and 24				-110.1	-116
$N_{oc}^{$	Bands 2, 5, 7, and, 17	dBm/15 kHz	-88. 95	-88. 95	-108.1	-114
	Bands 3, 8, 12, 13, 14 and 20				-107.1	-113
	Band 9				-109.1	-115
î /ı	24.14.0	-ID	40	40		
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$		dB	10	10	14	-5
	Bands 1, 4, 6,10, 11, 18, 19, 21 and 24				-96.10	-121
RSRP ^{Note3}	Bands 2, 5, 7 and 17	dBm/15 kHz	-78. 95	-78. 95	-94.10	-119
	Bands 3, 8, 12, 13, 14 and 20				-93.10	-118
	Band 9		1		-95.10	-120
	Bands 1, 4, 6,10,				-68.15	-87.03
Io ^{Note3}	18, 19, 21 and 24 Bands 2, 5 and 7, 17	dBm/9 MHz	-50.75	-50.75	-66.15	-85.03
	Bands 3, 8, 12, 13, 14 and 20				-65.15	-84.03
	Band 9				-67.15	-86.03
\hat{E}_s/N_{oc}		dB	10	10	14	-5
Propagation co	ondition	-	AW	GN	AW	GN
	NG shall be used such	that both cells are				

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and lo levels have been derived from other parameters for information

purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 9.1.3.2.5-3: RSRP FDD Inter frequency relative accuracy requirements for the reported values

	Test 1	Test 2
Normal Conditions		
Lowest reported value (Cell 2)	RSRP_(x - 8)	RSRP_(x - 33)
Highest reported value (Cell 2)	RSRP_(x + 8)	RSRP_(x -18)
Extreme Conditions		
Lowest reported value (Cell 2)	RSRP_(x - 8)	RSRP_(x - 33)
Highest reported value (Cell 2)	RSRP_(x + 8)	RSRP_(x -18)
RSRP_x is the reported value of	Cell 1	

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

9.1.4 TDD Inter frequency RSRP Accuracy

9.1.4.1 TDD - TDD Inter Frequency Absolute RSRP Accuracy

9.1.4.1.1 Test purpose

To verify that the TDD inter-frequency absolute RSRP measurement accuracy is within the specified limit for all bands.

9.1.4.1.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

9.1.4.1.3 Minimum conformance requirements

The absolute accuracy of RSRP is defined as the RSRP measured from a cell that has different carrier frequency from the serving cell.

The accuracy requirements in Table 9.1.4.1.3-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

Conditions defined in 36.101 Section 7.3 for reference sensitivity are fulfilled.

 $RSRP|dBm \geq -127 \; dBm \; for \; Bands \; 1, \; 4, \; 6, \; 10, \; 11, \; \; 18, \; 19, \; 21, \; 24, \; 33, \; 34, \; 35, \; 36, \; 37, \; 38, \; 39, \; 40, \; 42, \; 43, \; 43, \; 43, \; 44,$

RSRP|dBm≥ -126 dBm for Bands 9, 41

RSRP|dBm≥ -125 dBm for Bands 2, 5, 7

RSRP|dBm≥ -124 dBm for Bands 3, 8, 12, 13, 14, 17, 20

Table 9.1.4.1.3-1: RSRP TDD-TDD Inter frequency absolute accuracy

Parameter	Unit	Accura	cy [dB]	Conditions ¹			
		Normal condition	Extreme condition	Bands 1, 4, 6, 10, 11, 18, 19, 21, 24, 33, 34, 35, 36, 37, 38, 39, 40, 42, 43	Bands 2, 5, 7	Bands 3, 8, 12, 13, 14, 17, 20	Bands 9, 41
				lo	lo	lo	lo
RSRP for Ês/lot ≥	dBm	±6	±9	-	-	-	-
-6 dB				121dBm/15kHz	119dBm/15kHz	118dBm/15kHz	120dBm/15kHz
				70dBm/	70dBm/	70dBm/	70dBm/
				BW Channel	BW Channel	BW _{Channel}	BW Channel
RSRP for Ês/lot ≥	dBm	±8	±11	-70dBm/	-70dBm/	-70dBm/	-70dBm/
-6 dB				BW _{Channel}	BW _{Channel}	BW _{Channel}	BW _{Channel}
				50dBm/	50dBm/	50dBm/	50dBm/
				BW _{Channel}	BW _{Channel}	BW _{Channel}	BW _{Channel}
Note: lo is assume	ed to hav	e constant EP	RE across th	e bandwidth.			

The reporting range of RSRP is defined from -140 dBm to -44 dBm with 1 dB resolution.

The mapping of measured quantity is defined in Table 9.1.2.1.3-2. The range in the signalling may be larger than the guaranteed accuracy range.

The normative reference for this requirement is TS 36.133 [4] clause 9.1.3.1, clause 9.1.4 and A.9.1.4.

9.1.4.1.4 Test description

9.1.4.1.4.1 Initial conditions

Test Environment: Normal, TL/VL, TL/VH, TH/VL, TH/VH; as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14.
- 2. Propagation conditions are set according to Annex B clause B.0.
- 3. Message contents are defined in clause 9.1.4.1.4.3.
- 4. Cell 1 and Cell 2 are on the different carrier frequencies. Cell 1 is the serving cell and Cell 2 is the target cell. Cell 1 is the cell used for connection setup with the power levels set according to Annex C.0 and C.1 for this test.

9.1.4.1.4.2 Test procedure

- 1. Ensure that the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to Table 9.1.4.1.5-2 for the test interval as appropriate. Propagation conditions are set according to Annex B clause B.1.1
- 3. SS shall transmit an RRCConnectionReconfiguration message on cell.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. UE shall transmit periodically MeasurementReport messages.
- 6. SS shall check the reported RSRP value in MeasurementReport messages. The RSRP value of Cell 2 reported by the UE is compared to the actual RSRP value according to Table 9.1.4.1.5-3.
- 7. SS shall check the MeasurementReport message transmitted by the UE until the confidence level according to Tables G.2.3-1 in Annex G.2 is achieved.

8. Repeat step 1-7 for each sub-test in Table 9.1.4.1.5-2 as appropriate.

9.1.4.1.4.3 Message contents

Message contents are according to TS 36.508 [7] values 4.6 with the following exceptions:

Table 9.1.4.1.4.3-1: Common Exception messages for RSRP TDD - TDD Inter frequency absolute accuracy test requirement

Default Message Contents				
Common contents of system information				
blocks exceptions				
Default RRC messages and information	Table H.3.1-1			
elements contents exceptions	Table H.3.5-2			
·	Table H.3.5-3			

Table 9.1.4.1.4.3-2: *MeasResults*: Additional RSRP TDD - TDD Inter frequency absolute accuracy test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1		
measResultServCell SEQUENCE {			
rsrpResult		Set according to specific test	
rsrqResult	Not present		
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
}			
}			

Table 9.1.4.1.4.3-3: *MeasResultListEUTRA*: Additional RSRP TDD - TDD Inter frequency absolute accuracy test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultsListEUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId	PhysCellId	INTEGER (0503)	
measResult SEQUENCE {			
rsrpResult		According to	
		specific test	
rsrqResult	Not present		
}			
[}			

9.1.4.1.5 Test requirement

Table 9.1.4.1.5-2 defines the primary level settings including test tolerances for all tests.

Each RSRP TDD inter-frequency absolute accuracy test shall meet the reported values test requirements in table 9.1.4.1.5-3.

Table 9.1.4.1.5-1: Void

Table 9.1.4.1.5-2: RSRP TDD-TDD Inter frequency absolute accuracy test parameters

Davamatar		l lmi4	Tes	st 1	Tes	st 2
	arameter	Unit	Cell 1	Cell 2	Cell 1	Cell 2
	hannel Number		1	2	1	2
BW _{channel}		MHz	10	10	10	10
Special subfra	me configuration Note1		6	3	6	
	k configuration Note1		1		1	
Gap Pattern Id			0	-	0	-
Measurement		$n_{{\scriptscriptstyle PRB}}$	22-	-27	22-	–27
PDSCH Refere	ence measurement		R.0	_	R.0	_
channel define	ed in A.1.2		TDD	_	TDD	
PDSCH alloca	tion	$n_{{\scriptscriptstyle PRB}}$	13—36	-	13—36	-
	CH/PHICH Reference channel defined in		R.6	TDD	R.6	TDD
A.2.2	channer denned in		1.0	טטו	N.0	טטו
	s defined in D.2.1		OP.1	OP.2	OP.1	OP.2
	nd D.2.2 (OP.2 TDD)		TDD	TDD	TDD	TDD
PBCH_RA						
PBCH_RB						
PSS_RA						
SSS_RA						
PCFICH_RB						
PHICH_RA						
PHICH_RB		dB	0	0	0	0
PDCCH_RA						
PDCCH_RB						
PDSCH_RA						
PDSCH RB						
OCNG_RA ^{Note}	2					
OCNG_RB ^{Note:}	2					
N _{oc} Note3 Bands 33, 34, 35, 36, 37, 38, 39,,40, 42, 43		dBm/15 kHz	-88.95	-88.95	-109.00	-116.00
$[\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}]$		dB	10.00	10.00	14.00	-5.00
RSRP ^{Note4}	Bands 33, 34, 35, 36, 37, 38, 39,40, 42, 43	dBm/15 kHz	-78.95	-78.95	-95.00	-121.00
Bands 33, 34, 35, 36, 37, 38, 39,,40, 42, 43		dBm/9 MHz	-50.75	-50.75	-67.05	-87.03
\hat{E}_s/N_{oc}		dB	10.00	10.00	14.00	-5.00
Propagation co	ondition	-	AW	GN	AW	GN
N. d. T					1 404	

Note 1: For special subframe and uplink-downlink configurations see Tables 4.2-1 and 4.2-2 in 3GPP TS 36.211.

Note 2: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 3: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 4: RSRP and lo levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 5: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 9.1.4.1.5-3: RSRP TDD-TDD Inter frequency absolute accuracy requirements for the reported values

	Test 1	Test 2
Normal Conditions		
Lowest reported value (Cell 2)	RSRP_52	RSRP_12
Highest reported value (Cell 2)	RSRP_71	RSRP_27
Extreme Conditions		
Lowest reported value (Cell 2)	RSRP_49	RSRP_09
Highest reported value (Cell 2)	RSRP_74	RSRP_30

9.1.4.2 TDD - TDD Inter Frequency Relative Accuracy of RSRP

9.1.4.2.1 Test purpose

To verify that the TDD inter-frequency relative accuracy measurement of RSRP is within the specified limit for all bands.

9.1.4.2.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

9.1.4.2.3 Minimum conformance requirements

The relative accuracy of RSRP in inter frequency case is defined as the RSRP measured from one cell compared to the RSRP measured from another cell on a different frequency.

The accuracy requirements in Table 9.1.4.2.3-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

Conditions defined in 36.101 Section 7.3 for reference sensitivity are fulfilled.

 $RSRP1|_{dBm} \ge -126 dBm if RSRP1 is on Band 9, 41,$

 $RSRP1|_{dBm} \ge -125 dBm if RSRP1 is on Bands 2, 5, 7, 17,$

 $RSRP1|_{dBm} \ge -124 \text{ dBm if RSRP1 is on Bands 3, 8, 12, 13, 14, 20,}$

 $RSRP2|_{dBm} \ge -127 \text{ dBm if RSRP2}$ is on Bands 1, 4, 6, 10, 11, 18, 19, 21, 24, 33, 34, 35, 36, 37, 38, 39, 40, 42, 43,

 $RSRP2|_{dBm} \ge -126 \text{ dBm if RSRP2 is on Band 9, 41}$

 $RSRP2|_{dBm} \ge -125 \text{ dBm if RSRP2 is on Bands 2, 5, 7,}$

 $RSRP2|_{dBm} \ge -124 \text{ dBm if RSRP2 is on Bands } 3, 8, 12, 13, 14, 17, 20.$

$$\left| RSRP1 \right|_{dBm} - RSRP2 \Big|_{dBm} \right| \le 27 \, dB$$

| Channel 1_Io -Channel 2_Io | ≤ 20 dB

Table 9.1.4.2.3-1: RSRP TDD-TDD Inter frequency relative accuracy

Parameter	Unit	Accura	cy [dB]	Conditions ¹			
		Normal condition	Extreme condition	RSRP is on Bands 1, 4, 6, 10, 11, 18, 19, 21, 24, 33, 34, 35, 36, 37, 38, 39, 40, 42, 43	RSRP is on Bands 2, 5, 7	RSRP is on Bands 3, 8, 12, 13, 14, 17, 20	RSRP is on Band 9, 41
				lo	lo	lo	lo
RSRP for Ês/lot	dBm			-121dBm/15kHz	-119dBm/15kHz	-118dBm/15kHz	-120dBm/15kHz
> -6dB		±6	±6	50dBm/	50dBm/	50dBm/	50dBm/
				BW _{Channel}	BW Channel	BW _{Channel}	BW Channel

Note 1: lo is assumed to have constant EPRE across the bandwidth.

Note 2: The parameter Ês/lot is the minimum Ês/lot of the pair of cells.to which the requirement applies.

The reporting range of RSRP is defined from -140 dBm to -44 dBm with 1 dB resolution.

The mapping of measured quantity is defined in Table 9.1.2.1.3-2. The range in the signalling may be larger than the guaranteed accuracy range.

The normative reference for this requirement is TS 36.133 [4] clause 9.1.3.2, clause 9.1.4 and A.9.1.4.

9.1.4.2.4 Test description

9.1.4.2.4.1 Initial conditions

Test Environment: Normal, TL/VL, TL/VH, TH/VL, TH/VH; as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14.
- 2. Propagation conditions are set according to Annex B clause B.0.
- 3. Message contents are defined in clause 9.1.4.2.4.3.
- 4. Cell 1 and Cell 2 are on the different carrier frequencies. Cell 1 is the serving cell and Cell 2 is the target cell. Cell 1 is the cell used for connection setup with the power levels set according to Annex C.0 and C.1 for this test.

9.1.4.2.4.2 Test procedure

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to Table 9.1.4.2.5-2 for the test interval as appropriate. Propagation conditions are set according to Annex B clause B.1.1.
- 3. SS shall transmit an RRCConnectionReconfiguration message on cell.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. UE shall transmit periodically MeasurementReport messages.
- 6. SS shall check the reported RSRP value of Cell 1 and Cell 2 in MeasurementReport messages. The reported RSRP value for Cell 2 is compared to the reported RSRP value for Cell 1 for each MeasurementReport message according to Table 9.1.4.2.5-3.
- 7. SS shall check the MeasurementReport messages transmitted by the UE until the confidence level according to Tables G.2.3-1 in Annex G.2 is achieved.
- 8. Repeat step 1-7 for each sub-test in Table 9.1.4.2.5-2 as appropriate.

9.1.4.2.4.3 Message contents

Message contents are according to TS 36.508 [7] values 4.6 with the following exceptions:

Table 9.1.4.2.4.3-1: Common Exception messages for RSRP TDD - TDD Inter frequency relative accuracy test requirement

Default Message Contents					
Common contents of system information					
blocks exceptions					
Default RRC messages and information	Table H.3.1-1				
elements contents exceptions	Table H.3.5-2				
· ·	Table H.3.5-3				

Table 9.1.4.2.4.3-2: *MeasResults*: Additional RSRP TDD - TDD Inter frequency relative accuracy test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1		
measResultServCell SEQUENCE {			
rsrpResult		According to specific test	
rsrqResult	Not present		
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
}			
}			

Table 9.1.4.2.4.3-3: *MeasResultListEUTRA*: Additional RSRP TDD - TDD Inter frequency absolute accuracy test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListEUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId	PhysCellId	INTEGER (0503)	
measResult SEQUENCE {			
rsrpResult		According to	
		specific test	
rsrqResult	Not present		
}			
}			

9.1.4.2.5 Test requirement

Table 9.1.4.2.5-2 defines the primary level settings including test tolerances for all tests.

Each RSRP TDD inter-frequency relative accuracy test shall meet the reported values test requirements in table 9.1.4.2.5-3. The mapping of measured quantity is defined in Table 9.1.4.2.5-3. The range in the signalling may be larger than the guaranteed accuracy range.

Table 9.1.4.2.5-1: Void

Table 9.1.4.2.5-2: RSRP TDD-TDD Inter frequency relative accuracy test parameters

Parameter		l l m it	Tes	Test 1		Test 2	
		Unit	Cell 1	Cell 2	Cell 1	Cell 2	
E-UTRA RF C	Channel Number		1	2	1	2	
BW _{channel}		MHz	10	10	10	10	
Special subfra	ame configuration ^{Note1}		6	6		6	
Uplink-downling	Uplink-downlink configuration Note1		1		1		
Gap Pattern Id	Gap Pattern Id		0	-	0	-	
Measurement	Measurement bandwidth		22—27		22—27		
PDSCH Reference measurement			R.0	_	R.0	_	
channel define	ed inA.1.2		TDD	_	TDD		
PDSCH alloca	ation	$n_{{\it PRB}}$	13—36	-	13—36	-	
	CH/PHICH Reference		D 0		D 0		
Measurement	channel defined in		R.6 TDD		R.6 TDD		
	ns defined in D.2.1		OP.1	OP.2	OP.1	OP.2	
(OP.1 TDD) a	nd D.2.2 (OP.2 TDD)		TDD	TDD	TDD	TDD	
PBCH_RA							
PBCH_RB							
PSS_RA							
SSS_RA							
PCFICH_RB							
PHICH_RA							
PHICH_RB		dB	0	0	0	0	
PDCCH_RA							
PDCCH_RB							
PDSCH_RA							
PDSCH_RB							
OCNG_RANote	OCNG_RA ^{Note2}						
OCNG_RB ^{Note}	e2						
$N_{oc}^{ m Note3}$	Bands 33, 34, 35, 36, 37, 38, 39,,40, 42, 43	dBm/15 kHz	-88. 95	-88. 95	-110.1	-116	
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$		dB	10	10	14	-5	
RSRP ^{Note4}	Bands 33, 34, 35, 36, 37, 38, 39,,40, 42, 43	dBm/15 kHz	-78.95	-78.95	-96.10	-121	
lo ^{Note4}	Bands 33, 34, 35, 36, 37, 38, 39,,40, 42, 43	dBm/9 MHz	-50. 75	-50.75	-68.15	-87.03	
\hat{E}_s/N_{oc}		dB	10	10	14	-5	
Propagation of	ondition	-	AWGN		AW	GN	
	coocial subframe and	م بامنامینیماد مامنامین					

Note 1: For special subframe and uplink-downlink configurations see Tables 4.2-1 and 4.2-2 in 3GPP TS 36.211.

Note 2: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 3: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 4: RSRP and lo levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 5: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 9.1.4.2.5-3: RSRP TDD-TDD Inter frequency relative accuracy requirements for the reported values

	Test 1	Test 2		
Normal Conditions				
Lowest reported value (Cell 2)	RSRP_(x - 8)	RSRP_(x - 33)		
Highest reported value (Cell 2)	RSRP_(x + 8)	RSRP_(x - 18)		
Extreme Conditions				
Lowest reported value (Cell 2)	RSRP_(x - 8)	RSRP_(x - 33)		
Highest reported value (Cell 2)	RSRP_(x + 8)	RSRP_(x - 18)		
RSRP_x is the reported value of Cell 1				

9.2 RSRQ

9.2.1 FDD Intra frequency RSRQ Accuracy

9.2.1.1 FDD Intra Frequency Absolute RSRQ Accuracy

9.2.1.1.1 Test purpose

To verify that the FDD intra frequency absolute RSRQ measurement accuracy is within the specified limit for all bands.

9.2.1.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

9.2.1.1.3 Minimum conformance requirements

The absolute accuracy of RSRQ is defined as the RSRQ measured from a cell on the same frequency as that of the serving cell.

The accuracy requirements in table 9.2.1.1.3-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

RSRP|dBm≥ -127 dBm for Bands 1, 4, 6, 10, 11, 18, 19, 21, 24, 33, 34, 35, 36, 37, 38, 39, 40, 42, 43,

RSRP|dBm≥ -126 dBm for Bands 9, 41,

 $RSRP|_{dBm} \ge -125 dBm$ for Bands 2, 5, 7, 17,

 $RSRP|_{dBm} \ge -124 \ dBm \ for \ Bands \ 3, \ 8, \ 12, \ 13, \ 14, \ 20.$

Table 9.2.1.1.3-1: RSRQ FDD intra frequency absolute accuracy

Parameter	Unit	Accuracy [dB]			Condi	tions¹	
		Normal condition	Extreme condition	Bands 1, 4, 6, 10, 11, 18, 19, 21, 24, 33, 34, 35, 36, 37, 38, 39, 40, 42, 43	Bands 2, 5, 7, 17	Bands 3, 8, 12, 13, 14, 20	Bands 9, 41
				lo	lo	lo	lo
RSRQ when RSRP Ês/lot > -3 dB	dBm	± 2.5	± 4	- 121dBm/15kHz 50dBm/ BW _{Channel}	- 119dBm/15kHz 50dBm/ BW _{Channel}	- 118dBm/15kHz 50dBm/ BW _{Channel}	- 120dBm/15kHz 50dBm/ BW _{Channel}
RSRQ when RSRP Ês/lot ≥ -6 dB	dBm	± 3.5	± 4	- 121dBm/15kHz 50dBm/ BW _{Channel}	- 119dBm/15kHz 50dBm/ BW _{Channel}	- 118dBm/15kHz 50dBm/ BW _{Channel}	- 120dBm/15kHz 50dBm/ BW _{Channel}
Note: lo is a	ssume	to have cor	stant FPRF	across the band	width.	l	

The reporting range of RSRQ is defined from -19.5 dB to -3 with 0.5 dB resolution. The mapping of measured quantity is defined in Table 9.2.1.1.3-2.

Table 9.2.1.1.3-2: RSRQ FDD Intra frequency absolute accuracy measurement report mapping

Reported value	Measured quantity value	Unit
RSRQ_00	RSRQ < -19.5	dB
RSRQ_01	-19.5 ≤ RSRQ < -19	dB
RSRQ_02	-19 ≤ RSRQ < -18.5	dB
RSRQ_32	-4 ≤ RSRQ < -3.5	dB
RSRQ_33	-3.5 ≤ RSRQ < -3	dB
RSRQ_34	-3 ≤ RSRQ	dB

The normative reference for this requirement is TS 36.133 [4] clause 9.1.5.1 and A.9.2.1.

9.2.1.1.4 Test description

9.2.1.1.4.1 Initial conditions

Test Environment: Normal, TL/VL, TL/VH, TH/VL, TH/VH; as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.20.
- 2. Propagation conditions are set according to Annex B clause B.0.
- 3. Message contents are defined in clause 9.2.1.1.4.3.
- 4. There is one E-UTRA FDD carrier and two cells specified in each test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

9.2.1.1.4.2 Test procedure

The three tests consist of Cell 1, serving cell and Cell 2, target cell. The absolute accuracy of RSRQ is defined as the RSRQ measured from a cell on the same frequency as that of the serving cell, Cell 1.

1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.

- 2. Set the parameters according to Table 9.2.1.1.5-2 as appropriate. Propagation conditions are set according to Annex B clause B.1.1.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. UE shall transmit periodically MeasurementReport messages.
- 6. SS shall check the RSRQ value in MeasurementReport messages. The RSRQ value of Cell 2 reported by the UE is compared to the actual RSRQ value according to Table 9.2.1.1.5-3.
- 7. The SS shall check MeasurementReport messages transmitted by the UE until the confidence level according to G.2.3-1 in Annex G.2 is achieved.
- 8. Repeat step 1-7 for each sub-test in Table 9.2.1.1.5-2 as appropriate.

9.2.1.1.4.3 Message contents

Message contents are according to TS 36.508 [7] values 4.6 with the following exceptions:

Table 9.2.1.1.4.3-1: Common Exception messages for RSRQ FDD intra frequency absolute accuracy test requirement

Default Message Contents				
Common contents of system information				
blocks exceptions				
Default RRC messages and information	Table H.3.1-1			
elements contents exceptions	Table H.3.5-1			
·	Table H.3.5-4			

Table 9.2.1.1.4.3-2: *MeasResults*: Additional RSRQ FDD intra frequency absolute accuracy test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultServCell SEQUENCE {			
rsrpResult	Not present		
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
<i>}</i>			

Table 9.2.1.1.4.3-3: *MeasResultListEUTRA*: Additional RSRQ FDD intra frequency absolute accuracy test requirement

Information Element	Value/remark	Comment	Condition
MeasResultListEUTRA::= SEQUENCE (SIZE			
1maxCellReport)) OF SEQUENCE {			
physCellId	PhysicalCellIdentity		
measResult SEQUENCE {			
rsrpResult	Not present		
rsrqResult		Set according to	
		specific test	
}			
}			

9.2.1.1.5 Test requirement

Table 9.2.1.1.5-2 defines the primary level settings including test tolerances for all tests.

Each RSRQ FDD intra frequency absolute accuracy test shall meet the reported values test requirements in Table 9.2.1.1.5-3.

Table 9.2.1.1.5-1: Void

Table 9.2.1.1.5-2: Cell Specific Test requirement Parameters for RSRQ FDD intra frequency absolute accuracy

Doromotor		11.14	Test 1		Test 2		Test 3	
Pai	rameter	Unit	Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
E-UTRA RF Ch	annel Number		1		1		1	
BW _{channel}		MHz	10		10		10	
Measurement b	andwidth	$n_{\it PRB}$	22—27		22—27		22—27	
	PDSCH Reference measurement channel defined in A.1.1		R.0 FDD	-	R.0 FDD	-	R.0 FDD	-
PDSCH allocati	on	$n_{\it PRB}$	13—36	-	13—36	-	13—36	-
	H/PHICH Reference hannel defined in		R.6 I	-DD	R.6 I	FDD	R.6 I	-DD
OCNG Patterns	defined in D.1.1 D.1.2 (OP.2 FDD)		OP.1 FDD	OP.2 FDD	OP.1 FDD	OP.2 FDD	OP.1 FDD	OP.2 FDD
PBCH_RA PBCH_RB PSS_RA SSS_RA								
PCFICH_RB PHICH_RA PHICH_RB		dB	0	0	0	0	0	0
PDCCH_RA PDCCH_RB PDSCH_RA								
PDSCH_RB OCNG_RA ^{Note1} OCNG_RB ^{Note1}								
	Bands 1, 4, 6, 10, 11, 18, 19, and 24						-116	
$N_{oc}^{ m Note2}$	Bands 2, 5, 7 and 17	dBm/15 kHz	-85.51	-85.51	-103.85	-103.85	-1 ⁻	14
	Bands 3, 8, 12, 13, 14 and 20						-113 -115	
☆ / r	Band 9							
$\hat{\mathbf{E}}_{\mathrm{s}}/\mathbf{I}_{\mathrm{ot}}$		dB	-1.76	-1.76	-4.7	-4.7	-5.17	-5.17
	Bands 1, 4, 6, 10, 11, 18, 19, 21 and 24 Bands 2, 5,7 and						-119.60	-119.60
RSRP ^{Note3}	17	dBm/15 kHz	-82.51	-82.51	-106.75	-106.75	-117.60	-117.60
	Bands 3, 8, 12, 13, 14 and 20						-116.60	-116.60
	Band 9 Bands 1, 4, 6, 10, 11, 18, 19, 21 and 24						-118.60	-118.60
RSRQ ^{Note3}	Bands 2, 5, 7 and 17 Bands 3, 8, 12,	dB	-14.77	-14.77	-16.76	-16.76	-17. 12	-17. 12
	13, 14 and 20 Band 9 Bands 1, 4, 6, 10,							
. Note3	11, 18, 19, 21 and 24 Bands 2, 5, 7 and						-85.	
Io ^{Note3}	17 Bands 3, 8, 12,	dBm/9 MHz	-50.75	-50.75	-73	-73	49-	
	13, 14 and 20 Band 9	dB dBm/15 kHz					-82. -84.	
	Danu 3		1		1	1	-04.	+3

\hat{E}_s/N_{oc}		dB	3	3	-2.9	-2.9	-3.6	-3.6
Propagat	ion condition	-	AW	GN	AW	GN	AWGN	
Note 1: Note 2:	spectral density is achieved Interference from other ce	shall be used such that both cells are fully allocated and a constant total transmitted power all density is achieved for all OFDM symbols. Frence from other cells and noise sources not specified in the test is assumed to be constant over the constant of the constant o				int over		
Note 3:	subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. RSRQ, RSRP and lo levels have been derived from other parameters for information purposes. They are							
Note 4:	not settable parameters themselves. RSRP and RSRQ minimum requirements are specified assuming independent interference and noise at						•	
Note 4.	each receiver antenna port		e specilied	i assuming	пиерепи	ent miener	ence and	ioise at

Table 9.2.1.1.5-3: RSRQ FDD Intra frequency absolute accuracy requirements for the reported values

	Test 1	Test 2	Test 3				
	All bands	All bands	Bands 1, 4, 6, 10, 18, 19, 21 and 24	Bands 2, 5, 7, 17	Bands 3, 8, 12, 13, 14, 20	Band 9	
		Normal Con	ditions				
Lowest reported value (Cell 2)	RSRQ_04	RSRQ_00	RSRQ_00	RSRQ_00	RSRQ_00	RSRQ_00	
Highest reported value (Cell 2)	RSRQ_16	RSRQ_14	RSRQ_14	RSRQ_14	RSRQ_14	RSRQ_14	
Extreme Conditions							
Lowest reported value (Cell 2)	RSRQ_01	RSRQ_00	RSRQ_00	RSRQ_00	RSRQ_00	RSRQ_00	
Highest reported value (Cell 2)	RSRQ_19	RSRQ_15	RSRQ_15	RSRQ_15	RSRQ_15	RSRQ_15	

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

9.2.2 TDD Intra frequency RSRQ Accuracy

9.2.2.1 TDD Intra Frequency Absolute RSRQ Accuracy

9.2.2.1.1 Test purpose

To verify that the TDD intra frequency absolute RSRQ measurement accuracy is within the specified limit for all TDD bands.

9.2.2.1.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

9.2.2.1.3 Minimum conformance requirements

The absolute accuracy of RSRQ is defined as the RSRQ measured from a cell on the same frequency as that of the serving cell.

The accuracy requirements in table 9.2.2.1.3-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

Conditions defined in 36.101 Section 7.3 for reference sensitivity are fulfilled.

 $RSRP|dBm \ge -127 \ dBm \ for \ Bands \ 1, \ 4, \ 6, \ 10, \ 11, \ 18, \ 19, \ 21, \ 24, \ 33, \ 34, \ 35, \ 36, \ 37, \ 38, \ 39, \ 40, \ 42, \ 43, \$

RSRP|dBm≥ -126 dBm for Bands 9, 41,

 $RSRP|_{dBm} \ge -125 dBm$ for Bands 2, 5, 7,

 $RSRP_{dBm} \ge -124 dBm$ for Bands 3, 8, 12, 13, 14, 17, 20.

Table 9.2.2.1.3-1: RSRQ TDD intra frequency absolute accuracy

Parameter	Unit	Accura	cy [dB]		Condi	tions ¹	
		Normal condition	Extreme condition	Bands 1, 4, 6, 10, 11, 18, 19, 21, 24, 33, 34, 35, 36, 37, 38, 39, 40, 42, 43	Bands 2, 5, 7	Bands 3, 8, 12, 13, 14, 17, 20	Bands 9, 41
				lo	lo	lo	lo
RSRQ when RSRP Ês/lot > -3 dB	dBm	± 2.5	±4	- 121dBm/15kHz 50dBm/ BW _{Channel}	- 119dBm/15kHz 50dBm/ BW _{Channel}	- 118dBm/15kHz 50dBm/ BW _{Channel}	- 120dBm/15kHz 50dBm/ BW _{Channel}
RSRQ when RSRP Ês/lot ≥ -6 dB	dBm	± 3.5	± 4	- 121dBm/15kHz 50dBm/ BW _{Channel}	- 119dBm/15kHz 50dBm/ BW _{Channel}	- 118dBm/15kHz 50dBm/ BW _{Channel}	- 120dBm/15kHz 50dBm/ BW _{Channel}
Note: Id	is ass	umed to have	e constant EF	PRE across the b	andwidth.		

The reporting range of RSRQ is defined from -19.5 dB to -3 with 0.5 dB resolution.

The mapping of measured quantity is defined in Table 9.2.2.1.3-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 9.2.2.1.3-2: RSRQ TDD Intra frequency absolute accuracy measurement report mapping

Reported value	Measured quantity value	Unit
RSRQ_00	RSRQ < -19.5	dB
RSRQ_01	-19.5 ≤ RSRQ < -19	dB
RSRQ_02	-19 ≤ RSRQ < -18.5	dB
RSRQ_32	-4 ≤ RSRQ < -3.5	dB
RSRQ_33	-3.5 ≤ RSRQ < -3	dB
RSRQ_34	-3 ≤ RSRQ	dB

The normative reference for this requirement is TS 36.133 [4] clause 9.1.5.1, 9.1.7 and A.9.2.2.

9.2.2.1.4 Test description

9.2.2.1.4.1 Initial conditions

Test Environment: Normal, TL/VL, TL/VH, TH/VL, TH/VH; as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.20.
- 2. Propagation conditions are set according to Annex B clause B.0.
- 3. Message contents are defined in clause 9.2.2.1.4.3.
- 4. There is one E-UTRA TDD carrier and two cells specified in each test. Cell 1 is the cell used for call setup with the power level set according to clause C.0 and C.1 for this test.

9.2.2.1.4.2 Test procedure

The three tests consist of Cell 1, serving cell and Cell 2, target cell. The absolute accuracy of RSRQ is defined as the RSRQ measured from a cell on the same frequency as that of the serving cell, Cell 1.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to Table 9.2.2.1.5-2 as appropriate. Propagation conditions are set according to Annex B clause B.1.1.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. UE shall transmit periodically MeasurementReport messages.
- 6. SS shall check the RSRQ value in MeasurementReport messages. The RSRQ value of Cell 2 reported by the UE is compared to the actual RSRQ according to Table 9.2.2.1.5-3.
- 7. The SS shall check MeasurementReport messages transmitted by the UE until the confidence level according to Tables G.2.3-1 in Annex G.2 is achieved.
- 8. Repeat step 1-7 for each sub-test in Table 9.2.2.1.5-2 as appropriate.

9.2.2.1.4.3 Message contents

Message contents are according to TS 36.508 [7] values 4.6 with the following exceptions:

Table 9.2.2.1.4.3-1: Common Exception messages for RSRQ TDD intra frequency absolute accuracy test requirement

Default Message Co	ontents
Common contents of system information	
blocks exceptions	
Default RRC messages and information	Table H.3.1-1
elements contents exceptions	Table H.3.5-1
·	Table H.3.5-4

Table 9.2.2.1.4.3-2: *MeasResults*: Additional RSRQ TDD intra frequency absolute accuracy test requirement

Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1		
meaResuCellItsServCell SEQUENCE {			
rsrpResult	Not present		
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
}			
}			

Table 9.2.2.1.4.3-3: *MeasResultListEUTRA*: Additional RSRQ TDD intra frequency absolute accuracy test requirement

Information Element	Value/remark	Comment	Condition
measResultListEUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId	PhysCellId of Cell 2		
measResult SEQUENCE {			
rsrpResult	Not present		
rsrqResult	·	Set according to	
·		specific test	
}			
)			

9.2.2.1.5 Test requirement

Table 9.2.2.1.5-2 defines the primary level settings including test tolerances for all tests.

Each RSRQ TDD intra frequency absolute accuracy test shall meet the reported values test requirements in Table 9.2.2.1.5-3.

Table 9.2.2.1.5-1: Void

Table 9.2.2.1.5-2: Cell Specific Test requirement Parameters for RSRQ TDD intra frequency absolute accuracy

		Unit	Tes	st 1	Tes	st 2	Tes	st 3
P	Parameter		Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
E-UTRA RF Channel Number			1		1		1	
BW _{channel}		MHz	1	0	10		10	
Special subfra	nme configuration Note1		6	6	6	3	6	
Uplink-downlir	nk configuration ^{Note1}		1		1		1	
Measurement	bandwidth	n_{PRB}	22-	-27	22–	-27	22–	-27
PDSCH Refer	ence measurement ed in A.1.2		R.0 TDD	-	R.0 TDD	-	R.0 TDD	-
PDSCH alloca	ation	$n_{\it PRB}$	13—36	-	13—36	-	13—36	-
measurement A.2.2	CH/PHICH Reference channel defined in		R.6	TDD	R.6	TDD	R.6	TDD
	ns defined in D.2.1 nd D.2.2 (OP.2 TDD)		OP.1 TDD	OP.2 TDD	OP.1 TDD	OP.2 TDD	OP.1 TDD	OP.2 TDD
PBCH RA	110 D.Z.Z (O1 .Z 1DD)		100	100	100	100	100	100
PBCH RB								
PSS_RA								
SSS_RA								
PCFICH_RB								
PHICH RA								
PHICH_RB		dB	0	0	0	0	0	0
PDCCH RA								
PDCCH_RB								
PDSCH RA								
PDSCH RB								
OCNG_RA ^{Note}	92							
OCNG_RB ^{Note}								
$N_{oc}^{ m Note3}$	Bands 33, 34, 35, 36, 37, 38, 39,,40, 42, 43	dBm/15 kHz	-85.51	-85.51	-103.85	-103.85	-1 ⁻	16
\hat{E}_{s}/I_{ot}		dB	-1.76	-1.76	-4.7	-4.7	-5. 17	-5. 17
RSRP ^{Note4}	Bands 33, 34, 35, 36, 37, 38, 39, 4, 42, 430	dBm/15 kHz	-82.51	-82.51	-106.75	-106.75	-119.60	-119.60
RSRQ ^{Note4}	Bands 33, 34, 35, 36, 37, 38, 39,, 4, 42, 430	dB	-14.77	-14.77	-16.76	-16.76	-17. 12	-17. 12
Bands 33, 34, 35, 36, 37, 38, 39,, 4, 42, 430		dBm/9 MHz	-50.75	-50.75	-73	-73	-85	.49
\hat{E}_s/N_{oc}		dB	3	3	-2.9	-2.9	-3.6	-3.6
Propagation c	ondition	-	AW	GN	AW	GN	AW	GN
Note 1. For enocial subframe and		م بامنامینیماد مامنامین		-				

Note 1: For special subframe and uplink-downlink configurations see Tables 4.2-1 and 4.2-2 in 3GPP TS 36.211.

Note 3: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 4: RSRQ, RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 5: RSRP and RSRQ minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 2: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Table 9.2.2.1.5-3: RSRQ TDD Intra frequency absolute accuracy requirements for the reported values

	Test 1	Test 2	Test 3
	All bands	All bands	Bands 33, 34, 35, 36, 37, 38, 39 and 40
Normal Conditions			
Lowest reported value (Cell 2)	RSRQ_04	RSRQ_00	RSRQ_00
Highest reported value (Cell 2)	RSRQ_16	RSRQ_14	RSRQ_14
Extreme Conditions			
Lowest reported value (Cell 2)	RSRQ_01	RSRQ_00	RSRQ_00
Highest reported value (Cell 2)	RSRQ_19	RSRQ_15	RSRQ_15

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

9.2.3 FDD - FDD Inter frequency RSRQ Accuracy

9.2.3.1 FDD - FDD Inter Frequency Absolute RSRQ Accuracy

9.2.3.1.1 Test purpose

To verify that the FDD - FDD inter frequency absolute RSRQ measurement accuracy is within the specified limit for all bands.

9.2.3.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

9.2.3.1.3 Minimum conformance requirements

The absolute accuracy of RSRQ is defined as the RSRQ measured from a cell that has different carrier frequency from the serving cell.

The accuracy requirements in table 9.2.3.1.3-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

Conditions defined in TS 36.101 [2] clause 7.3 for reference sensitivity are fulfilled.

 $RSRP|dBm \ge -127 dBm$ for Bands 1, 4, 6, 10, 11, 18, 19, 21, 24, 33, 34, 35, 36, 37, 38, 39, 40, 42, 43,

RSRP|dBm≥ -126 dBm for Bands 9, 41,

 $RSRP|_{dBm} \ge -125 \text{ dBm for Bands } 2, 5, 7, 17,$

 $RSRP|_{dBm} \ge -124 \ dBm \ for \ Bands \ 3, \ 8, \ 12, \ 13, \ 14, \ 20.$

Table 9.2.3.1.3-1: RSRQ FDD - FDD inter frequency absolute accuracy

Parameter	Unit	Accura	cy [dB]		Condi	tions¹	
		Normal condition	Extreme condition	Bands 1, 4, 6, 10, 11, 18, 19, 21, 24, 33, 34, 35, 36, 37, 38, 39, 40, 42, 43	17	Bands 3, 8, 12, 13, 14, 20	Bands 9, 41
				lo	lo	lo	lo
RSRQ when RSRP Ês/lot > -3 dB	dBm	± 2.5	± 4	- 121dBm/15kHz 50dBm/ BW _{Channel}	- 119dBm/15kHz 50dBm/ BW _{Channel}	- 118dBm/15kHz 50dBm/ BW _{Channel}	- 120dBm/15kHz 50dBm/ BW _{Channel}
RSRQ when RSRP Ês/lot ≥ -6 dB	dBm	± 3.5	± 4	- 121dBm/15kHz 50dBm/ BW _{Channel}	- 119dBm/15kHz 50dBm/ BW _{Channel}	- 118dBm/15kHz 50dBm/ BW _{Channel}	- 120dBm/15kHz 50dBm/ BW _{Channel}
	ssume	d to have cor	nstant EPRE	across the band	width.		

The reporting range of RSRQ is defined from -19.5 dB to -3 with 0.5 dB resolution. The mapping of measured quantity is defined in Table 9.2.3.1.3-2.

Table 9.2.3.1.3-2: RSRQ FDD - FDD Inter frequency absolute accuracy measurement report mapping

Reported value	Measured quantity value	Unit
RSRQ_00	RSRQ < -19.5	dB
RSRQ_01	-19.5 ≤ RSRQ < -19	dB
RSRQ_02	-19 ≤ RSRQ < -18.5	dB
RSRQ_32	-4 ≤ RSRQ < -3.5	dB
RSRQ_33	-3.5 ≤ RSRQ < -3	dB
RSRQ_34	-3 ≤ RSRQ	dB

The normative reference for this requirement is TS 36.133 [4] clause 9.1.6.1 and A.9.2.3.

9.2.3.1.4 Test description

9.2.3.1.4.1 Initial conditions

Test Environment: Normal, TL/VL, TL/VH, TH/VL, TH/VH; as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14.
- 2. Propagation conditions are set according to Annex B clause B.0.
- 3. Message contents are defined in clause 9.2.3.1.4.3.
- 4. There are two E-UTRA FDD carriers and one cell on each carrier specified in each test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

9.2.3.1.4.2 Test procedure

The three tests consist of Cell 1, serving cell and Cell 2, target cell. The absolute accuracy of RSRQ is defined as the RSRQ measured from a cell that has different carrier frequency from the serving cell, Cell 1.

1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.

- 2. Set the parameters according to Table 9.2.3.1.5-2 for the test interval as appropriate. Propagation conditions are set according to Annex B clause B.1.1.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. UE shall transmit periodically MeasurementReport messages.
- 6. SS shall check the RSRQ value in MeasurementReport messages. The RSRQ value of Cell 2 reported by the UE is compared to the actual RSRQ value according to Table 9.2.3.1.5-3.
- 7. The SS shall check MeasurementReport messages transmitted by the UE until the confidence level according to table G.2.3-1 in Annex G.2 is achieved.
- 8. Repeat step 1-7 for each test interval in Table 9.2.3.1.5-2 as appropriate.

9.2.3.1.4.3 Message contents

Message contents are according to TS 36.508 [7] values 4.6 with the following exceptions:

Table 9.2.3.1.4.3-1: Common Exception messages for RSRQ FDD - FDD inter frequency absolute accuracy test requirement

Default Message Contents					
Common contents of system information					
blocks exceptions					
	Table H.3. 1-1				
elements contents exceptions	Table H.3.5-2				
·	Table H.3.5-4				

Table 9.2.3.1.4.3-2: *MeasResults*: Additional RSRQ FDD - FDD inter frequency absolute accuracy test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultServCell SEQUENCE {			
rsrpResult	Not present		
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
}			
}			

Table 9.2.3.1.4.3-3: MeasResultListEUTRA: Additional RSRQ FDD - FDD inter frequency absolute accuracy test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListEUTRA::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId	PhysCellId		
measResult SEQUENCE {			
rsrpResult	Not present		
rsrqResult		Set according to	
		specific test	
}			
}			

9.2.3.1.5 Test requirement

Table 9.2.3.1.5-2 defines the primary level settings including test tolerances for all tests.

Each RSRQ FDD - FDD inter frequency absolute accuracy test shall meet the reported values test requirements in Table 9.2.3. 1.5-3.

Table 9.2.3.1.5-1: Void

Table 9.2.3.1.5-2: Cell Specific Test requirement Parameters for RSRQ FDD - FDD inter frequency absolute accuracy

D		Unit	Test 1		Test 2		Test 3	
	Parameter		Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
	E-UTRA RF Channel Number		1	2	1	2	1	2
BW _{channel} Measurement ga	on configuration	MHz	10	10	10	10	10	10
Measurement ba		n	22-	1	22—27		22—27	
	nce measurement	n_{PRB}						-21
channel defined	in A.1.1		R.0 FDD	-	R.0 FDD	-	R.0 FDD	-
PDSCH allocation		n_{PRB}	13—36	-	13—36	-	13—36	-
	H/PHICH Reference hannel defined in		R.6 I	-DD	R.6 I	-DD	R.6 F	FDD
	defined in D.1.1 I D.1.2 (OP.2 FDD)		OP.1 FDD	OP.2 FDD	OP.1 FDD	OP.2 FDD	OP.1 FDD	OP.2 FDD
PBCH_RA	,							
PBCH_RB PSS_RA								
SSS_RA								
PCFICH_RB								
PHICH_RA								
PHICH_RB		dB	0	0	0	0	0	0
PDCCH_RA								
PDCCH_RB PDSCH_RA								
PDSCH_RB								
OCNG_RA ^{Note1}								
OCNG_RB ^{Note1}	OCNG_RB ^{Note1}							
	Bands 1, 4, 6, 10, 11, 18, 19, 21 and 24						-119	-119
$N_{oc}^{ m Note2}$	Bands 2, 5,7 and 17	dBm/15 kHz	-80	-80.8	-104	-104	-117	-117
	Bands 3, 8, 12, 13, 14 and 20						-116	-116
	Band 9						-118	-118
$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$		dB	-1.75	-1.75	-4.7	-4.7	-4.5	-4.5
	Bands 1, 4, 6, 10, 11, 18, 19, 21 and 24						-123.50	-123.50
RSRP ^{Note3}	Bands 2, 5, 7 and 17	dBm/15 kHz	-81.75	-81.75	-108.70	-108.70	-121.50	-121.50
	Bands 3, 8, 12, 13, 14 and 20						-120.50	-120.50
	Band 9						-122.50	-122.50
	Bands 1, 4, 6, 10, 11, 18, 19, 21 and 24							
RSRQ ^{Note3}	Bands 2, 5, 7 and 17	dB	-14.76	-14.76	-16.76	-16.76	-16.61	-16.61
	Bands 3, 8, 12, 13, 14 and 20 Band 9							
	Bands 1, 4, 6, 10, 11, 18, 19, 21 and 24	dD.u /0					-89.90	-89.90
Io ^{Note3}	Bands 2, 5, 7 and 17	dBm/9 MHz	-50	-50.8	-74.95	-74.95	-87.90	-87.90
	Bands 3, 8, 12, 13, 14 and 20						-86.90	-86.90

Band 9						-88.90	-88.90
\hat{E}_s/N_{oc}	dB	-1.75	-1.75	-4.7	-4.7	-4.5	-4.5
Propagation condition	- AWGN AWGN AWGN					GN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power							

- Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{ac} to be fulfilled.
- Note 3: RSRQ, RSRP and lo levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
- Note 4: RSRP and RSRQ minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 9.2.3.1.5-3: RSRQ FDD - FDD inter frequency absolute accuracy requirements for the reported values

	Test 1	Test 2	Test 3			
Normal Conditions						
Lowest reported value (Cell 2)	RSRQ_04	RSRQ_00	RSRQ_00			
Highest reported value (Cell 2)	RSRQ_16	RSRQ_14	RSRQ_14			
Extreme Conditions						
Lowest reported value (Cell 2)	RSRQ_01	RSRQ_00	RSRQ_00			
Highest reported value (Cell 2)	RSRQ_19	RSRQ_15	RSRQ_15			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

9.2.3.2 FDD - FDD Inter Frequency Relative Accuracy of RSRQ

9.2.3.2.1 Test purpose

To verify that the FDD - FDD inter frequency relative accuracy measurement of RSRQ is within the specified limit for all bands.

9.2.3.2.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 8 and forward.

9.2.3.2.3 Minimum conformance requirements

The relative accuracy of RSRQ in inter frequency case is defined as the RSRQ measured from one cell compared to the RSRQ measured from another cell on a different frequency.

The accuracy requirements in table 9.2.3.2.3-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

Conditions defined in 36.101 [2] clause 7.3 for reference sensitivity are fulfilled.

 $RSRP1|_{dBm} \ge -126 dBm if RSRP1 is on Band 9, 41,$

 $RSRP1_{dBm} \ge -125 dBm if RSRP1 is on Bands 2, 5, 7, 17,$

 $RSRP1_{dBm} \ge -124 \text{ dBm if RSRP1 is on Bands 3, 8, 12, 13, 14, 20,}$

 $RSRP2|_{dBm} \ge -126 dBm if RSRP2 is on Band 9, 41,$

 $RSRP2|_{dBm} \ge -125 dBm if RSRP2 is on Bands 2, 5, 7, 17,$

 $RSRP2|_{dBm} \ge -124 \text{ dBm if RSRP2 is on Bands 3, 8, 12, 13, 14, 20.}$

$$\left| RSRP1 \right|_{dBm} - RSRP2 \Big|_{dBm} \right| \le [27]dB$$

| Channel 1_Io -Channel 2_Io | ≤ 20 dB

Table 9.2.3.2.3-1: RSRQ FDD - FDD inter frequency relative accuracy

Parameter	Unit	Accura	cy [dB]	Conditions ¹				
		Normal	Extreme	RSRQ is on	RSRQ is on	RSRQ is on	RSRQ is on	
		condition	condition	Bands 1, 4, 6,	Bands 2, 5, 7,	Bands 3, 8, 12,	Bands 9, 41	
				10, 11, 18, 19,	17	13, 14, 20		
				21, 24, 33, 34,				
				35, 36, 37, 38,				
				39, 40, 42, 43				
				lo	lo	lo	lo	
RSRQ	dBm	± 3	± 4	-	-	-	-	
when				121dBm/15kH	119dBm/15kHz	118dBm/15kHz	120dBm/15kHz	
RSRP				z50dBm	50dBm/	50dBm/	50dBm/	
Ês/lot > -3					BW _{Channel}	BW _{Channel}	BW _{Channel}	
dB								
RSRQ	dBm	± 4	± 4	-	-	-	-	
when				121dBm/15kH	119dBm/15kHz	118dBm/15kHz	120dBm/15kHz	
RSRP				z50dBm	50dBm/	50dBm/	50dBm/	
Ês/lot ≥ -6					BW _{Channel}	BW _{Channel}	BW _{Channel}	
dB								
Note 1: Id	o is assu	med to have	e constant E	PRE across the	bandwidth.			

The parameter Ês/lot is the minimum Ês/lot of the pair of cells to which the requirement applies.

The reporting range of RSRQ is defined from -19.5 dB to -3 with 0.5 dB resolution. The mapping of measured quantity is defined in Table 9.2.3.2.3-2.

Table 9.2.3.2.3-2: RSRQ FDD - FDD Inter frequency relative accuracy measurement report mapping

Reported value	Measured quantity value	Unit
RSRQ_00	RSRQ < -19.5	dB
RSRQ_01	-19.5 ≤ RSRQ < -19	dB
RSRQ_02	-19 ≤ RSRQ < -18.5	dB
RSRQ_32	-4 ≤ RSRQ < -3.5	dB
RSRQ_33	-3.5 ≤ RSRQ < -3	dB
RSRQ_34	-3 ≤ RSRQ	dB

The normative reference for this requirement is TS 36.133 [4] clause 9.1.6.2 and A.9.2.3.

9.2.3.2.4 Test description

9.2.3.2.4.1 Initial conditions

Test Environment: Normal, TL/VL, TL/VH, TH/VL, TH/VH; as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14.
- 2. Propagation conditions are set according to Annex B clause B.0.

- 3. Message contents are defined in clause 9.2.3.2.4.3.
- 4. There are two E-UTRA FDD carriers and one cell on each carrier specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.0 and C.1 for this test.

9.2.3.2.4.2 Test procedure

The three tests consist of Cell 1, serving cell and Cell 2, target cell. The relative accuracy of RSRQ is defined as the RSRQ measured from one cell compared to the RSRQ measured from another cell on a different frequency.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to Table 9.2.3.2.5-2 for the test interval as appropriate. Propagation conditions are set according to Annex B clause B.1.1.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. UE shall transmit periodically MeasurementReport messages.
- 6. SS shall check the RSRQ value of Cell 1 and Cell 2 in MeasurementReport messages. The reported RSRQ value for Cell 2 is compared to the reported RSRQ value for Cell 1 for each MeasurementReport message.
- 7. The SS shall check MeasurementReport messages transmitted by the UE until the confidence level according to G.2.3-1 in Annex G.2 is achieved.
- 8. Repeat step 1-7 for each test interval in Table 9.2.3.2.5-2 as appropriate.

9.2.3.2.4.3 Message contents

Message contents are according to TS 36.508 [7] values 4.6 with the following exceptions:

Table 9.2.3.2.4.3-1: Common Exception messages for RSRQ FDD - FDD inter frequency relative accuracy test requirement

Default Message Contents				
Common contents of system information				
blocks exceptions				
Default RRC messages and information	Table H.3. 1-1			
elements contents exceptions	Table H.3.5-2			
·	Table H.3.5-4			

Table 9.2.3.2.4.3-2: *MeasResults*: Additional RSRQ FDD - FDD inter frequency relative accuracy test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultServCell SEQUENCE {			
rsrpResult	Not present		
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
<u> </u>			

Table 9.2.3.2.4.3-3: MeasResultListEUTRA: Additional RSRQ FDD - FDD inter frequency absolute accuracy test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultListEUTRA::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId	PhysicalCellIdentity		
measResult SEQUENCE {			
rsrpResult	Not present		
rsrqResult		Set according to	
		specific test	
}			
}			

9.2.3.2.5 Test requirement

Table 9.2.3.2.5-2 defines the primary level settings including test tolerances for all tests.

Each RSRQ FDD - FDD inter frequency relative accuracy test shall meet the reported values test requirements in Table 9.2.3.2.5-3.

Table 9.2.3.2.5-1: Void

Table 9.2.3.2.5-2: Cell Specific Test requirement Parameters for RSRQ FDD - FDD inter frequency relative accuracy

E-UTRA RF Channel Number 1	Do	ramatar	l lmi4	Tes	st 1	Tes	st 2	Tes	t 3	
BWyserse MHz			Unit	Cell 1		Cell 1		Cell 1	Cell 2	
Gap Pattern Id 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 22—27 <td></td> <td>annel Number</td> <td>NAL I-</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>		annel Number	NAL I-							
Measurement bandwidth n pRB 22—27 23 25 26 29 20P.1 —7 20.2 27 20P.1 —7 20P.2 —7 20P.1 —7 20P.2 —7			IVIHZ			_				
PDSCH Reference measurement channel defined in A.1.1 R.0 FDD - R.0 FDD - R.0 FDD - PDSCH allocation R.0 FDD - R.0 FDD - R.0 FDD - PDSCH allocation R.0 FDD R.6 FDD - R.6 FDD - PDSCH allocation R.6 FDD R.6 FD		andwidth	n	1		-	-		I	
channel defined in A.1.1 PDSCH allocation PDSCH allocation PDSCH-PDCCH/PCFICH/PHICH Reference measurement channel defined in A.2.1 OCNG Patterns defined in D.1.1 OCNG Patterns defined in D.1.2 OCNG Patterns defined			PRB		<u> </u>	22-21			22 21	
PDCCH/PCFICH/PHICH Reference measurement channel defined in A.2.1 CONG Patterns defined in D.1.1 COP.1 FDD				R.0 FDD	-	R.0 FDD	-	R.0 FDD	-	
Response			n_{PRB}	13—36	-	13—36	-	13—36	-	
CP-1 FDD and D-1.2 (OP.2 FDD) FDD F				R.6 I	FDD	R.6 I	FDD	R.6 I	FDD	
PBCH_RA PBCH_RB PSS_RA PCFICH_RB PHICH_RA PHICH_RB PDCCH_RB PDCCH_RB PDCCH_RB PDCCH_RB PDSCH_RB P										
PSS_RA SSS_RA PCFICH_RB PHICH_RA PHICH_RA PDCCH_RB PDCCH_RB PDSCH_RA PDSCH_RA PDSCH_RB P	PBCH_RA	,								
SSS_RA										
PFIICH_RA PHICH_RB PHICH_RB PDCCH_RA PDCCH_RA PDCCH_RB										
PHICH_RB										
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$										
PDCCH_RA PDCCH_RB PDCCH_RB PDSCH_RA PDSCH_RA PDSCH_RB			dB	0	0	0	0	0	0	
PDSCH_RA PDSCH_RB COCNG_RA Researce PDSCH_RB COCNG_RB Researce PDSCH_RB	PDCCH_RA									
PDSCH_RB	PDCCH_RB									
DCNG_RB^Notes DCNG_RB^Notes	PDSCH_RA									
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	PDSCH_RB									
$N_{oc}^{\text{Note2}} = \begin{bmatrix} \text{Bands } 1, 4, 6, 10, \\ 11, 18, 19, 24, \\ \text{Bands } 2, 5, 7 \text{ and} \\ 17 \\ \text{Bands } 3, 8, 12, 13, \\ 14 \text{ and } 20 \\ \text{Band } 9 \end{bmatrix} = R8.8 $	OCNG_RANOTE1									
$N_{oc}^{Note2} = \begin{cases} 11, 18, 19, 24, \\ Bands 2, 5, 7 \text{ and} \\ 17 \\ Bands 3, 8, 12, 13, \\ 14 \text{ and } 20 \\ Band 9 \end{cases} = R8.8 \\ -80.8 \\ -80.8 \\ -80.8 \\ -80.8 \\ -80.8 \\ -80.8 \\ -80.8 \\ -80.8 \\ -80.8 \\ -104 \\ -104 \\ -104 \\ -104 \\ -104 \\ -104 \\ -104 \\ -117 \\ -116 \\ -116 \\ -118 \\ -$	OCNG_RB****	ID 1 4 4 0 40								
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		11, 18, 19, 24,					-104	-119	-119	
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	$N_{oc}^{ m Note2}$	17		-80.8	-80.8	-104		-117	-117	
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$								-116	-116	
RSRP ^{Note3} Bands 1, 4, 6, 10, 11, 18, 19, 2124, Bands 2, 5, 7 and 17 Bands 1, 4, 6, 10, 11, 18, 19, 213. RSRQ ^{Note3} Bands 1, 4, 6, 10, 11, 18, 19, 28, Bands 2, 5, 7 and 17 Bands 3, 8, 12, 13, 14 and 20 Band 9 Bands 1, 4, 6, 10, 11, 18, 19, 24, Bands 1, 4, 6, 10, 11, 18, 19, 24, Bands 2, 5, 7 and 17 Bands 3, 8, 12, 13, 14 and 20 Bands 1, 4, 6, 10, 11, 18, 19, 24, Bands 2, 5, 7 and 17 Bands 3, 8, 12, 13, 14 and 20 Bands 2, 5, 7 and 17 Bands 3, 8, 12, 13, 14 and 20 Bands 2, 5, 7 and 17 Bands 3, 8, 12, 13, 14 and 20 Bands 2, 5, 7 and 17 Bands 3, 8, 12, 13, 14 and 20 Bands 9 -50.8		Band 9						-118	-118	
RSRP ^{Note3} 11, 18, 19, 2124, Bands 2, 5, 7 and 17	$\hat{\mathrm{E}}_{\mathrm{s}}/\mathrm{I}_{\mathrm{ot}}$		dB	-1.75	-1.75	-4.7	-4.7	-4.5	-4.5	
RSRP ^{Note3} $\begin{array}{c ccccccccccccccccccccccccccccccccccc$		11, 18, 19, 2124,						-123.50	-123.50	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	RSRP ^{Note3}	17		-825.5	-82.55	-108.70	08.70 -108.70	-121.50	-121.50	
RSRQNote3 $\begin{bmatrix} Bands 1, 4, 6, 10, \\ 11, 18, 19, \\ Bands 2, 5, 7 \text{ and} \\ 17 \\ Bands 3, 8, 12, 13, \\ 14 \text{ and } 20 \\ Band 9 \end{bmatrix}$ dB -14.76 -14.76 -16.76 -16.76 -16.61 -16.6 -16.6 -16.61 -16.6 -16.61 -16.6 -16.61 -16.6 -16.61 -16.6 -16.61 -16.6 -16.61 -16.6 -16.76 $-16.$								-120.50	-120.50	
RSRQ ^{Note3} $\begin{bmatrix} 11, 18, 19, \\ Bands 2, 5, 7 \text{ and} \\ 17 \\ Bands 3, 8, 12, 13, \\ 14 \text{ and } 20 \\ Band 9 \end{bmatrix}$ dB -14.76 -16.76 -16.76 -16.61 -16.6 -16.6 -16.7 -11.1 $-11.$								-122.50	-122.50	
RSRQ Note3 17		11, 18, 19,								
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	RSRO ^{Note3}		dB	-14 76	-14 76	-16 76	-16 76	-16 61	-16.6	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	rtorta	Bands 3, 8, 12, 13,	u D	11.70	11.70	10.70	-10.76	10.01	10.0	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$										
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		Bands 1, 4, 6, 10,						-89.90	-89.90	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	Io ^{Note3}	Bands 2, 5, 7 and		-50.8	-50.8	-74.95	-74.95	-87.90	-87.90	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		Bands 3, 8, 12, 13,	MHz	30.0	30.0		-74.95	-86.90	-86.90	
\hat{E}_s/N_{oc} dB -1.75 -1.75 -4.7 -4.5 -4.5								-88.90	-88.90	
	\hat{E}_s/N_{oc}		dB	-1.75	-1.75	-4.7	-4.7			
		ndition	-	AW	GN	AW	GN	AW	GN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power
	spectral density is achieved for all OFDM symbols.

- Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{ac} to be fulfilled.
- Note 3: RSRQ, RSRP and lo levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
- Note 4: RSRP and RSRQ minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 9.2.3.2.5-3: RSRQ FDD inter frequency relative accuracy requirements for the reported values

	Test 1	Test 2	Test 3			
Normal Conditions						
Lowest reported value (Cell 2)	RSRQ_x - 8	RSRQ_x - 10	RSRQ_x - 10			
Highest reported value (Cell 2)	RSRQ_x +8	RSRQ_x +10	RSRQ_x +10			
Extreme Conditions						
Lowest reported value (Cell 2)	RSRQ_x - 10	RSRQ_x - 10	RSRQ_x - 10			
Highest reported value (Cell 2) RSRQ_x + 10 RSRQ_x + 10 RSRQ_x + 10						
RSRQ_x is the reported value of Cell 1						

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

9.2.4 TDD - TDD Inter frequency RSRQ Accuracy

9.2.4.1 TDD - TDD Inter Frequency Absolute RSRQ Accuracy

9.2.4.1.1 Test purpose

To verify that the TDD - TDD inter frequency absolute RSRQ measurement accuracy is within the specified limit for all bands.

9.2.4.1.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

9.2.4.1.3 Minimum conformance requirements

The absolute accuracy of RSRQ is defined as the RSRQ measured from a cell that has different carrier frequency from the serving cell.

The accuracy requirements in table 9.2.4.1.3-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or RSRQ value of Cell 2 reported by the UE four antenna ports.

Conditions defined in TS 36.101 [2] clause 7.3 for reference sensitivity are fulfilled.

RSRP|dBm≥ -127 dBm for Bands 1, 4, 6, 10, 11, 18, 19, 21, 24, 33, 34, 35, 36, 37, 38, 39, 40, 42, 43

RSRP|dBm≥ -126 dBm for Bands 9, 41,

 $RSRP|_{dBm} \ge -125 dBm$ for Bands 2, 5, 7

 $RSRP_{dBm} \ge -124 \text{ dBm for Bands } 3, 8, 12, 13, 14, 17, 20$

Parameter Unit Accuracy [dB] Conditions Bands 1, 4, 6, Normal Extreme Bands 2, 5, 7 Bands 3, 8, 12, Bands 9, 41 condition condition 10, 11, 18, 19, 13, 14, 17, 20 21, 24, 33, 34, 35, 36, 37, 38, 39, 40, 42, 43 lo lo lo lo RSRQ dBm ± 2.5 ± 4 121dBm/15kHz 119dBm/15kHz 118dBm/15kHz 120dBm/15kHz when **RSRP** ... -50dBm/ ... -50dBm/ ... -50dBm/ ... -50dBm/ \hat{E} s/lot > -3 **BW**Channel **BW**Channel **BW**Channel **BW**Channel dB **RSRQ** dBm ± 4 ± 3.5 when 121dBm/15kHz | 119dBm/15kHz 118dBm/15kHz | 120dBm/15kHz ... -50dBm/ ... -50dBm/ RSRP ... -50dBm/ ... -50dBm/ **BW**Channel **BW**_{Channel} Ês/lot ≥ -6 **BW**Channel **BW**Channel

Table 9.2.4.1.3-1: RSRQ TDD - TDD inter frequency absolute accuracy

The reporting range of RSRQ is defined from -19.5 dB to -3 with 0.5 dB resolution. The mapping of measured quantity is defined in Table 9.2.2.1.3-2.

The normative reference for this requirement is TS 36.133 [4] clause 9.1.6.1 and A.9.2.4.

Note: Io is assumed to have constant EPRE across the bandwidth

9.2.4.1.4 Test description

9.2.4.1.4.1 Initial conditions

Test Environment: Normal, TL/VL, TL/VH, TH/VL, TH/VH; as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14.
- 2. Propagation conditions are set according to Annex B clause B.0.
- 3. Message contents are defined in clause 9.2.4.1.4.3.
- 4. There are two E-UTRA TDD carriers and one cell on each carrier specified in each test. Cell 1 is the cell used for call setup with the power level set according to clause C.0 and C.1 for this test.

9.2.4.1.4.2 Test procedure

The three tests consist of Cell 1, serving cell and Cell 2, target cell. The absolute accuracy of RSRQ is defined as the RSRQ measured from a cell that has different carrier frequency from the serving cell, Cell 1. The Gap pattern configuration is with id#0 as defined in TS 36.133 clause 8.1.2.1.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to Table 9.2.4.1.5-2 for the test interval as appropriate. Propagation conditions are set according to Annex B clause B.1.1.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. UE shall transmit periodically MeasurementReport messages.
- 6. SS shall check the RSRQ value in MeasurementReport messages. The RSRQ value of Cell 2 reported by the UE is compared to the actual RSRQ value according to Table 9.2.4.1.5-3.

- 7. The SS shall check MeasurementReport messages transmitted by the UE until the confidence level according to Tables G.2.3-1 in Annex G.2 is achieved.
- 8. Repeat step 1-7 for each test interval in Table 9.2.4.1.5-2 as appropriate.

9.2.4.1.4.3 Message contents

Message contents are according to TS 36.508 [7] values 4.6 with the following exceptions:

Table 9.2.4.1.4.3-1: Common Exception messages for RSRQ TDD - TDD inter frequency absolute accuracy test requirement

Default Message Contents				
Common contents of system information blocks exceptions				
Default RRC messages and information	Table H.3.1-1			
elements contents exceptions	Table H.3.5-2			
·	Table H.3.5-4			

Table 9.2.4.1.4.3-2: *MeasResults*: Additional RSRQ TDD - TDD inter frequency absolute accuracy test requirement

Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1		
measResultServCell	SEQUENCE {		
rsrpResult		Not present	
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
}			

Table 9.2.4.1.4.3-3: MeasResultListEUTRA: Additional RSRQ TDD - TDD inter frequency absolute accuracy test requirement

Information Element	Value/remark	Comment	Condition
MeasResultListEUTRA ::= SEQUENCE (SIZE (1maxCellReport)) OF SEQUENCE {			
physCellId	PhysicalCellIdentity		
measResult SEQUENCE {	-		
rsrpResult	Not present		
rsrqResult		Set according to specific test	
}		specific test	
J			

9.2.4.1.5 Test requirement

Table 9.2.4.1.5-2 defines the primary level settings including test tolerances for all tests.

Each RSRQ TDD inter frequency absolute accuracy test shall meet the reported values test requirements in Table 9.2.4.2.5-3.

Table 9.2.4.1.5-1: Void

Table 9.2.4.1.5-2: Cell Specific Test requirement Parameters for RSRQ TDD - TDD inter frequency absolute accuracy

		1114	Tes	t 1	Tes	st 2	Tes	st 3
"	arameter	Unit	Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
E-UTRA RF (Channel Number		1	2	1	2	1	2
BW _{channel}		MHz	10	10	10	10	10	10
Gap Pattern I			0	-	0	-	0	-
Special subfr	ame configuration		6		6	6	6	6
Uplink-downli	ink configuration Note1		1		1		1	
Measuremen	t bandwidth	$n_{\it PRB}$	22—	-27	22-	-27	22-	–27
PDSCH Refe channel defin	rence measurement led in A.1.2		R.0 TDD	-	R.0 TDD	-	R.0 TDD	-
PDSCH alloc	ation	$n_{\it PRB}$	13—36	-	13—36	-	13—36	-
PDCCH/PCF								
defined in A.2			R.6 T	DD	R.6	TDD		TDD
	rns defined in D.2.1 and D.2.2 (OP.2 TDD)		OP.1 TDD	OP.2 TDD	OP.1 TDD	OP.2 TDD	OP.1 TDD	OP.2 TDD
PBCH_RA								
PBCH_RB								
PSS_RA								
SSS_RA								
PCFICH_RB								
PHICH_RA								
PHICH_RB		dB	0	0	0	0	0	0
PDCCH_RA								
PDCCH_RB								
PDSCH_RA								
PDSCH_RB								
OCNG_RANO	te2							
OCNG_RB ^{No}	te2							
	Bands 33, 34, 35,							
$N_{oc}^{ m Note3}$	36, 37, 38, 39, 40, 42, 43	dBm/15 kHz	-80	-80.8	-104	-104	-119	-119
Ês/lot	<u> </u>	dB	-1.75	-1.75	-4.7	-4.7	-4.5	-4.5
RSRP ^{Note4}	Bands 33, 34, 35, 36, 37, 38, 39, 40, 42, 43	dBm/15 kHz	-81.75	-81.75	-108.70	-108.70	-123.50	-123.50
RSRQ ^{Note4}	Bands 33, 34, 35, 36, 37, 38, 39, 40, 42, 43	dB	-14.7	-14.76	-16.76	-16.76	-16.61	-16.61
Io ^{Note4}	Bands 33, 34, 35, 36, 37, 38, 39, 40, 42, 43	dBm/9 MHz	-50	-50. 8	-74.95	-74.95	-89.90	-89.90
\hat{E}_s/N_{oc}		dB	-1.75	-1.75	-4.7	-4.7	-4.5	-4.5
Propagation of	condition	-	AWO	ĠN	AW	GN	AW	GN
	, and a color and				100 4 0 4			0.00.044

Note 1: For special subframe and uplink-downlink configurations see Tables 4.2-1 and 4.2-2 in 3GPP TS 36.211.

Note 2: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 3: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 4: RSRQ, RSRP and lo levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 5: RSRP and RSRQ minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 9.2.4.1.5-3: RSRQ TDD - TDD inter frequency absolute accuracy requirements for the reported values

	Test 1	Test 2	Test 3
Normal Conditions			
Lowest reported value (Cell 2)	RSRQ_04	RSRQ_00	RSRQ_00
Highest reported value (Cell 2)	RSRQ_16	RSRQ_14	RSRQ_14
Extreme Conditions			
Lowest reported value (Cell 2)	RSRQ_01	RSRQ_00	RSRQ_00
Highest reported value (Cell 2)	RSRQ_19	RSRQ_15	RSRQ_15

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

9.2.4.2 TDD - TDD Inter Frequency Relative Accuracy of RSRQ

9.2.4.2.1 Test purpose

To verify that the TDD - TDDinter frequency relative accuracy measurement of RSRQ is within the specified limit for all bands.

9.2.4.2.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 8 and forward.

9.2.4.2.3 Minimum conformance requirements

The relative accuracy of RSRQ in inter frequency case is defined as the RSRQ measured from one cell compared to the RSRQ measured from another cell on a different frequency.

The accuracy requirements in table 9.2.4.2.3-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

Conditions defined in 36.101 [2] clause 7.3 for reference sensitivity are fulfilled.

 $RSRP1|_{dBm} \ge -127 \text{ dBm if RSRP1}$ is on Bands 1, 4, 6, 10, 11, 18, 19, 21, 24, 33, 34, 35, 36, 37, 38, 39, 40, 42, 43

 $RSRP1|_{dBm} \ge -126 \text{ dBm if RSRP1 is on Band 9, 41,}$

 $RSRP1|_{dBm} \ge -125 dBm if RSRP1 is on Bands 2, 5, 7$

 $RSRP1_{dBm} \ge -124 \text{ dBm if RSRP1 is on Bands } 3, 8, 12, 13, 14, 17, 20$

 $RSRP2|_{dBm} \ge -127 \text{ dBm if RSRP2}$ is on Bands 1, 4, 6, 10, 11, 18, 19, 21, 24, 33, 34, 35, 36, 37, 38, 39, 40, 42, 43

 $RSRP2|_{dBm} \ge -126 dBm if RSRP2 is on Band 9, 41,$

 $RSRP2|_{dBm} \ge -125 \text{ dBm if RSRP2 is on Bands 2, 5, 7}$

 $RSRP2|_{dBm} \ge -124 \text{ dBm if RSRP2 is on Bands 3, 8, 12, 13, 14, 17, 20}$

$$\left| RSRP1 \right|_{dBm} - RSRP2 \Big|_{dBm} \right| \le [27]dB$$

| Channel 1_Io -Channel 2_Io | ≤ 20 dB

Table 9.2.4.2.3-1: RSRQ TDD - TDD Inter frequency relative accuracy

Parameter	Unit	Accura	cy [dB]	Conditions ¹			
		Normal condition	Extreme condition	RSRQ is on Bands 1, 4, 6, 10, 11, 18, 19, 21, 24, 33, 34, 35, 36, 37, 38, 39, 40, 42, 43	RSRQ is on Bands 2, 5, 7	RSRQ is on Bands 3, 8, 12, 13, 14, 17, 20	RSRQ is on Bands 9, 41
				lo	lo	lo	lo
RSRQ when RSRP Ês/lot > -3 dB	dBm	±3	± 4	- 121dBm/15kH z50dBm	- 119dBm/15kHz 50dBm/ BW _{Channel}	- 118dBm/15kHz 50dBm/ BW _{Channel}	- 120dBm/15kHz 50dBm/ BW _{Channel}
RSRQ when RSRP Ês/lot ≥ -6 dB	dBm	± 4	± 4	- 121dBm/15kH z50dBm	- 119dBm/15kHz 50dBm/ BW _{Channel}	- 118dBm/15kHz 50dBm/ BW _{Channel}	- 120dBm/15kHz 50dBm/ BW _{Channel}

Note 1: lo is assumed to have constant EPRE across the bandwidth.

Note 2. The parameter Ês/lot is the minimum Ês/lot of the pair of cells.to which the requirement applies.

The reporting range of RSRQ is defined from -19.5 dB to -3 with 0.5 dB resolution. The mapping of measured quantity is defined in Table 9.2.2.1.3-2.

The normative reference for this requirement is TS 36.133 [4] clause 9.1.6.2 and A.9.2.4.

9.2.4.2.4 Test description

9.2.4.2.4.1 Initial conditions

Test Environment: Normal, TL/VL, TL/VH, TH/VL, TH/VH; as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14.
- 2. Propagation conditions are set according to Annex B clause B.0.
- 3. Message contents are defined in clause 9.2.4.2.4.3.
- 4. There are two E-UTRA TDD carriers and one cell on each carrier specified in the test. Cell 1 is the cell used for call setup with the power level set according to clause C.0 and C.1 for this test.

9.2.4.2.4.2 Test procedure

The three tests consist of Cell 1, serving cell and Cell 2, target cell. The relative accuracy of RSRQ is defined as the RSRQ measured from one cell compared to the RSRQ measured from another cell on a different frequency. The Gap pattern configuration is with id#0 as defined in TS 36.133 clause 8.1.2.1.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to Table 9.2.4.2.5-2 for the test interval as appropriate. Propagation conditions are set according to Annex B clause B.1.1.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. UE shall transmit periodically MeasurementReport messages.

- 6. SS shall check the RSRQ value of Cell 1 and Cell 2 in MeasurementReport messages. The reported RSRQ value for Cell 2 is compared to the reported RSRQ value for Cell 1 for each MeasurementReport message according to Table 9.2.4.2.5-3.
- 7. The SS shall check MeasurementReport messages transmitted by the UE until the confidence level according to Tables G.2.3-1 in Annex G.2 is achieved.
- 8. Repeat step 1-7 for each test interval in Table 9.2.4.1.5-2 as appropriate.

9.2.4.2.4.3 Message contents

Message contents are according to TS 36.508 [7] values 4.6 with the following exceptions:

Table 9.2.4.2.4.3-1: Common Exception messages for RSRQ TDD - TDD inter frequency relative accuracy test requirement

Default Message Contents					
Common contents of system information					
blocks exceptions					
Default RRC messages and information	Table H.3.1-1				
elements contents exceptions	Table H.3.5-2				
·	Table H.3.5-4				

Table 9.2.4.1.4.3-2: *MeasResults*: Additional RSRQ TDD - TDD inter frequency relative accuracy test requirement

Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1		
measResultServCell SEQUENCE {			
rsrpResult	Not present		
rsrqResult		Set according to specific test	
}			
measResultNeighCells CHOICE {			
measResultListEUTRA	MeasResultListEUTRA		
}			

Table 9.2.4.1.4.3-3: MeasResultListEUTRA: Additional RSRQ TDD - TDD inter frequency relative accuracy test requirement

Value/remark	Comment	Condition
PhysicalCellIdentity		
Not present		
	Set according to specific test	
	PhysicalCellIdentity	PhysicalCellIdentity Not present Set according to

9.2.4.2.5 Test requirement

Table 9.2.4.2.5-2 defines the primary level settings including test tolerances for all tests.

Each RSRQ TDD inter frequency relative accuracy test shall meet the reported values test requirements in Table 9.2.4.2.5-3.

Table 9.2.4.2.5-1: Void

Table 9.2.4.2.5-2: Cell Specific Test requirement Parameters for RSRQ TDD - TDD inter frequency relative accuracy

Parameter		l locit	Tes	Test 1		Test 2		Test 3	
		Unit	Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2	
	Channel Number		1	2	1	2	1	2	
BW _{channel}		MHz	10	10	10	10	10	10	
Gap Pattern Id			0	-	0	-	0	-	
Special subfra	Special subframe configuration Note1		6	5	6		6		
Uplink-downlin	nk configuration Note1		1		1		1		
Measurement	bandwidth	$n_{\it PRB}$	22-	-27	22—	27	22-	-27	
PDSCH Refer channel define	ence measurement ed in A.1.2		R.0 TDD	-	R.0 TDD	-	R.0 TDD	-	
PDSCH alloca	ation	n_{PRB}	13—36	-	13—36	-	13—36	-	
measurement A.2.2	CH/PHICH Reference channel defined in		R.6	ΓDD	R.6 T	DD	R.6	TDD	
	ns defined in D.2.1 nd D.2.2 (OP.2 TDD)		OP.1 TDD	OP.2 TDD	OP.1 TDD	OP.2 TDD	OP.1 TDD	OP.2 TDD	
PBCH_RA PBCH_RB PSS_RA SSS_RA PCFICH_RB PHICH_RA PHICH_RB PDCCH_RA PDCCH_RB PDSCH_RA PDSCH_RA PDSCH_RA PDSCH_RB OCNG_RB OCNG_RB	52	dB	0	0	0	0	0	0	
$N_{oc}^{ m Note3}$	Bands 33, 34, 35, 36, 37, 38, 39, 40, 42, 43	dBm/15 kHz	-80.8	-80.8	-104	-104	-119	-119	
Ês/lot		dB	-1.75	-1.75	-4.7	-4.7	-4.5	-4.5	
RSRP ^{Note4}	Bands 33, 34, 35, 36, 37, 38, 39, 40, 42, 43	dBm/15 kHz	-82. 55	-82. 55	-108.70	- 108.70	-123.50	-123.50	
RSRQ ^{Note4}	Bands 33, 34, 35, 36, 37, 38, 39, 40, 42, 43	dB	-14.76	-14.76	-16.76	-16.76	-16.61	-16.61	
lo ^{Note4}	Bands 33, 34, 35, 36, 37, 38, 39, 40, 42, 43	dBm/9 MHz	-50.8	-50.8	-74.95	-74.95	-89.90	-89.90	
\hat{E}_s/N_{oc}		dB	-1.75	-1.75	-4.7	-4.7	-4.5	-4.5	
Propagation c		-	AW		AWC		AW		
Nista di Fan	anagial aubframa and		C	T-b	1 1-0 1	- 1 4 2 2	- AADD TO	200044	

- Note 1: For special subframe and uplink-downlink configurations see Tables 4.2-1 and 4.2-2 in 3GPP TS 36.211.
- Note 2: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 3: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
- Note 4: RSRQ, RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
- Note 5: RSRP and RSRQ minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 9.2.4.2.5-3: RSRQ TDD - TDD inter frequency relative accuracy requirements for the reported values

	Test 1	Test 2	Test 3				
Normal Conditions		•					
Lowest reported value (Cell 2)	RSRQ_x - 8	RSRQ_x -10	RSRQ_x -10				
Highest reported value (Cell 2)	RSRQ_x + 8	RSRQ_x + 10	RSRQ_x + 10				
Extreme Conditions							
Lowest reported value (Cell 2)	RSRQ_x - 10	RSRQ_x - 10	RSRQ_x - 10				
Highest reported value (Cell 2)	RSRQ_x + 10	RSRQ_x + 10	RSRQ_x + 10				
RSRQ_x is the reported value of	RSRQ_x is the reported value of Cell 1						

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

9.3 UTRA FDD CPICH RSCP

9.3.1 E-UTRAN FDD - UTRA FDD CPICH RSCP absolute accuracy

• Editor's note: This section is incomplete. The following aspects are either missing or not yet determined: Statistical testing of cell re-selection delay performance requirements are undefined

9.3.1.1 Test purpose

To verify that the CPICH RSCP absolute measurement accuracy is within the specified limits.

9.3.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 9 and forward that support UTRA FDD.

9.3.1.3 Minimum conformance requirements

The accuracy requirements shall be the same as the inter-frequency measurement accuracy requirements for FDD CPICH RSCP.

In RRC_CONNECTED state the accuracy requirements shall meet the absolute accuracy requirements in table 9.3.1.3-1

Table 9.3.1.3-1: UTRAN FDD CPICH_RSCP absolute accuracy

		Accura	cy [dB]		Cond	itions	
				Band I, IV, VI, X	Band II, V and	Band III, VIII,	Band IX
Parameter	Unit	Normal	Extreme	XI, XIX and XXI	VII	XII, XIII and XIV	
		condition	condition	lo	lo	lo	lo
				[dBm/3,84 MHz]	[dBm/3,84 MHz]	[dBm/3,84 MHz]	[dBm/3,84 MHz]
CPICH_RSCP	dBm	± 6	± 9	-9470	-9270	-9170	-9370
CFICH_ROCF	dBm	± 8	± 11	-7050	-7050	-7050	-7050

If the UE, in RRC_CONNECTED state, needs measurement gaps to perform UTRAN FDD measurements, the UTRAN FDD measurement procedure and measurement gap pattern stated in TS 36.133 [4] clause 8.1.2.4.1 shall apply.

The reporting range and mapping specified for FDD CPICH RSCP is defined in Table 9.3.1.3-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 9.3.1.3-2: CPICH RSCP measurement report mapping

Reported value	Measured quantity value	Unit
CPICH_RSCP_LEV05	CPICH RSCP <-120	dBm
CPICH_RSCP_LEV04	-120 ≤ CPICH RSCP < -119	dBm
CPICH_RSCP_LEV03	-119 ≤ CPICH RSCP < -118	dBm
	•••	
CPICH_RSCP_LEV _89	-27 ≤ CPICH RSCP < -26	dBm
CPICH_RSCP_LEV _90	-26 ≤ CPICH RSCP < -25	dBm
CPICH_RSCP_LEV _91	-25 ≤ CPICH RSCP	dBm

The normative reference for this requirement is TS 25.133 [21] clauses 9.1.1.2 and 9.1.1.3 and TS 36.133 [4] clause 9.2.1 and A.9.3.1.

9.3.1.4 Test description

9.3.1.4.1 Initial conditions

Test Environment: Normal, TL/VL, TL/VH, TH/VL, TH/VH; as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.22.
- 2. The general test parameter settings are set up according to Table 9.3.1.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are defined in clause 9.3.1.4.3.
- 5. Cell 1 is the serving E-UTRAN FDD cell and Cell 2 is the target UTRAN FDD cell. Cell 1 is the cell used for connection setup with the power levels set according to Annex C.0 and C.1 for this test.

Table 9.3.1.4.1-1: General test parameters for UTRAN FDD CPICH RSCP absolute measurement accuracy test in E-UTRAN FDD

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference Measurement Channel R.0 FDD	As specified in section A.3.1.1.1
PCFICH/PDCCH/PHICH parameters		DL Reference Measurement Channel R.6 FDD	As specified in section A.3.1.2.1
E-UTRAN RF Channel Number		1	One E-UTRAN FDD carrier frequency is used.
UTRAN RF Channel Number		1	One UTRAN FDD carrier frequency is used.
E-UTRAN Channel Bandwidth (BW _{channel})	MHz	10	
Active cell		Cell 1	E-UTRAN cell 1 on RF channel number 1
Neighbor cells		Cell 2	UTRAN cell 2 on RF channel number 1
Gap Pattern Id		0	As specified in 3GPP TS 36.133 section 8.1.2.1.
Inter-RAT (UTRAN FDD) measurement quantity		CPICH RSCP	
Monitored UTRA FDD cell list size		12	UTRA cells on UTRA RF channel 1 provided in the cell list.
CP length		Normal	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF

9.3.1.4.2 Test procedure

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to Table 9.3.1.5-1 as appropriate. Propagation conditions are set according to Annex B clause B.1.1.
- 3. SS shall transmit an RRCConnectionReconfiguration message on Cell 1.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. UE shall transmit periodically MeasurementReport messages.
- 6. SS shall check CPICH_RSCP reported values of Cell 2 in MeasurementReport messages according to Table 9.3.1.5-3.
- 7. Repeat step 1-6 until the confidence level according to Tables G.2.3-1 in Annex G.2 is achieved.
- 8. Repeat step 1-7 for each sub-test in Table 9.3.1.5-1 as appropriate.

9.3.1.4.3 Message contents

Message contents are according to TS 36.508 [7] clause 4.6 with the following exceptions:

Table 9.3.1.4.3-1: *MeasConfig- DEFAULT:* Additional E-UTRAN FDD - UTRA FDD CPICH RSCP absolute accuracy test requirement

Information Element	Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-1 MeasConfig-DEFAULT:						
measObjectToRemoveList Not present measObjectToAddModList SEQUENCE { 2 entry (I.maxObjectId)) OF SEQUENCE { 4 measObjectToAddMod SEQUENCE { IdMeasObject-f1 measObject CHOICE { MeasObjectEUTRA measObject EUTRA MeasObjectEUTRA-GENERIC(f1) BY MeasObjectToAddMod SEQUENCE { measObjectID IdMeasObject-f8 measObjectUTRA MeasObject-F8 measObjectUTRA MeasObjectUTRA-GENERIC(f8) } } Intraction of the proof of				Condition			
MeasObjectToAddModList SEQUENCE (1.maxObjectId) OF SEQUENCE (1.maxObjectId) OF SEQUENCE (1.masObjectToAddMod SEQUENCE IdMeasObject-fr1 IdMeasObject-fr1 IdMeasObject-fr1	MeasConfig-DEFAULT ::= SEQUENCE {						
(1.maxObjectId)) OF SEQUENCE { IdMeasObject-f1 measObject CHOICE { IdMeasObjectEUTRA measObject EUTRA MeasObjectEUTRA-GENERIC(f1) } BeasObject EUTRA GENERIC(f1) } MeasObjectToAddMod SEQUENCE { measObject CHOICE { MeasObjectUTRA measObject UTRA MeasObjectUTRA-GENERIC(f8) } UTRA Cell generic (f8) UTRA Cell } Intraction (f8) } Intraction (f8		Not present					
MeasObjectToAddMod SEQUENCE { IdMeasObject-f1 measObject CHOICE { MeasObjectEUTRA measObject EUTRA MeasObjectEUTRA-GENERIC(f1) } BeasObjectEUTRA-GENERIC(f1) } MeasObjectId measObjectId IdMeasObject-f8 measObjectUTRA MeasObjectUTRA-GENERIC(f8) } MeasObjectUTRA-GENERIC(f8) } IdMeasObjectUTRA-GENERIC(f8) } IdMeasObjectUTRA-GENERIC(f8) } IdMeasObjectUTRA-GENERIC(f8) } IdMeasObjectUTRA-GENERIC(f8) } IdMeasObjectUTRA-GENERIC(f8) } IdMeasObjectUTRA-GENERIC(f8) } IdMeasObjectConfig-P reportConfigId IdReportConfig-P ImmeasIdToRemoveList Not present measId ImmeasId ImmeasId ImmeasId ImmeasId ImmeasId ImmeasId IdMeasObject-f8 ImmeasId IdMeasObject-f8 ImmeasId IdMeasObject-f8 ImmeasId IdMeasObject-f8 ImmeasId ImmeasId		2 entry					
measObject CHOICE { IdMeasObject-f1 measObject EUTRA MeasObjectEUTRA-GENERIC(f1) } BeasObjectEUTRA-GENERIC(f1) } BeasObjectToAddMod SEQUENCE { measObjectId IdMeasObject-f8 measObjectUTRA IdMeasObjectUTRA-GENERIC(f8) } BeasObjectUTRA-GENERIC(f8) } BeasObjectUTRA-GENERIC(f8) } BeasObjectUTRA-GENERIC(f8) } BeasObjectUTRA-GENERIC(f8) } BeasObjectUTRA-GENERIC(f8) } BeasObjectUTRA-GENERIC(f8) } BeasObjectIdTRA-GENERIC(f8) reportConfigId Dear Dear Dear Dear Dear Dear Dear Dear							
measObject CHOICE { measObject EUTRA	MeasObjectToAddMod SEQUENCE {						
measObject EUTRA MeasObjectEUTRA- GENERIC(f1)	measObjectId	IdMeasObject-f1					
GENERIC(f1)	measObject CHOICE {						
measObjectId measObject CHOICE { measObject UTRA MeasObjectUTRA- GENERIC(f8) } } } reportConfigToRemoveList reportConfigToAddModList SEQUENCE (SIZE (1.maxReportConfigId))OF SEQUENCE { reportConfig RemoveList reportConfig ReportConfig-P reportConfig RemoveList reportConfig RemoveList reportConfig RemoveList reportConfig ReportConfig-P reasIdToRemoveList reportConfig RemoveList reportConfig-P reportConfig RemoveList reportConfig Remo	measObject EUTRA		E-UTRA Cell				
measObjectId measObject CHOICE { measObject UTRA MeasObjectUTRA- GENERIC(f8) } } } reportConfigToRemoveList reportConfigToAddModList SEQUENCE (SIZE (1.maxReportConfigId))OF SEQUENCE { reportConfig RemoveList reportConfig ReportConfig-P reportConfig RemoveList reportConfig RemoveList reportConfig RemoveList reportConfig ReportConfig-P reasIdToRemoveList reportConfig RemoveList reportConfig-P reportConfig RemoveList reportConfig Remo	}						
measObjectId measObject CHOICE { measObject UTRA MeasObjectUTRA- GENERIC(f8) } } } reportConfigToRemoveList reportConfigToAddModList SEQUENCE (SIZE (1.maxReportConfigId))OF SEQUENCE { reportConfig RemoveList reportConfig ReportConfig-P reportConfig RemoveList reportConfig RemoveList reportConfig RemoveList reportConfig ReportConfig-P reasIdToRemoveList reportConfig RemoveList reportConfig-P reportConfig RemoveList reportConfig Remo	}						
measObject CHOICE { measObjectUTRA							
measObjectUTRA MeasObjectUTRA-GENERIC(f8) } } reportConfigToRemoveList reportConfigToAddModList SEQUENCE (SIZE (1.maxReportConfigId))OF SEQUENCE { reportConfigId reportConfig		IdMeasObject-f8					
GENERIC(f8)							
reportConfigToAddModList SEQUENCE (SIZE (1maxReportConfigId))OF SEQUENCE { reportConfigId idReportConfig-P reportConfig reportConfig ReportConfigEUTRA-PERIODICAL } measIdToRemoveList Not present measIdToAddModList SEQUENCE (SIZE 1 entry (1maxMeasId)) of SEQUENCE { measId 1 IdMeasObject-f8 reportConfigId idReportConfig-P } } quantityConfig SEQUENCE { quantityConfig SEQUENCE { measQuantityUTRA-FDD cpich-RSCP UTRAN } } measGapConfig MeasGapConfig-GP1 s-Measure Not present not pre	measObjectUTRA		UTRA Cell				
reportConfigToAddModList SEQUENCE (SIZE (1maxReportConfigId))OF SEQUENCE { reportConfigId idReportConfig-P reportConfig ReportConfigEUTRA- PERIODICAL } measIdToRemoveList Not present measIdToAddModList SEQUENCE (SIZE 1 entry (1maxMeasId)) of SEQUENCE { measId 1 IdMeasObject-f8 reportConfigId idReportConfig-P } quantityConfig SEQUENCE { quantityConfig SEQUENCE { measQuantityUTRA-FDD cpich-RSCP UTRAN } } measGapConfig MeasGapConfig-GP1 s-Measure Not present PreRegistrationInfoHRPD Not present	}						
reportConfigToAddModList SEQUENCE (SIZE (1maxReportConfigId))OF SEQUENCE { reportConfigId idReportConfig-P reportConfig reportConfig ReportConfigEUTRA-PERIODICAL } measIdToRemoveList Not present measIdToAddModList SEQUENCE (SIZE 1 entry (1maxMeasId)) of SEQUENCE { measId 1 IdMeasObject-f8 reportConfigId idReportConfig-P } } quantityConfig SEQUENCE { quantityConfig SEQUENCE { measQuantityUTRA-FDD cpich-RSCP UTRAN } } measGapConfig MeasGapConfig-GP1 s-Measure Not present not pre	}						
reportConfigToAddModList SEQUENCE (SIZE (1maxReportConfigId))OF SEQUENCE { reportConfigId idReportConfig-P reportConfig ReportConfigEUTRA-PERIODICAL } measIdToRemoveList Not present measIdToAddModList SEQUENCE (SIZE (1maxMeasId)) of SEQUENCE { measId 1 IdMeasObject-f8 reportConfigId idReportConfig-P } quantityConfig SEQUENCE { quantityConfig SEQUENCE { measQuantityUTRA-FDD cpich-RSCP UTRAN } } measGapConfig MeasGapConfig-GP1 s-Measure Not present preRegistrationInfoHRPD Not present	}						
(1maxReportConfigId))OF SEQUENCE { reportConfigId							
reportConfigId idReportConfig-P reportConfig ReportConfigEUTRA- PERIODICAL } measIdToRemoveList Not present measIdToAddModList SEQUENCE (SIZE 1 entry (1maxMeasId)) of SEQUENCE { measId 1 measObjectId IdMeasObject-f8 reportConfigId idReportConfig-P } quantityConfig SEQUENCE { quantityConfigUTRA SEQUENCE { measQuantityUTRA-FDD cpich-RSCP UTRAN } } measGapConfig MeasGapConfig-GP1 s-Measure Not present PreRegistrationInfoHRPD		1 entry					
reportConfig ReportConfigEUTRA-PERIODICAL } measIdToRemoveList Not present measIdToAddModList SEQUENCE (SIZE 1 entry (1maxMeasId)) of SEQUENCE { measId							
PERIODICAL measIdToRemoveList		idReportConfig-P					
measIdToAddModList SEQUENCE (SIZE (1maxMeasId)) of SEQUENCE { measId measObjectId measObjectId reportConfigId idReportConfig-P } quantityConfig SEQUENCE { quantityConfigUTRA SEQUENCE { measQuantityUTRA-FDD } measGapConfig Sequence (1maxMeasId) of SEQUENCE (1maxMea	reportConfig						
measIdToAddModList SEQUENCE (SIZE (1maxMeasId)) of SEQUENCE { measId measObjectId measObjectId reportConfigId idReportConfig-P } quantityConfig SEQUENCE { quantityConfigUTRA SEQUENCE { measQuantityUTRA-FDD } measGapConfig Sequence (1maxMeasId) of SEQUENCE (1maxMea	}						
(1maxMeasId)) of SEQUENCE { 1 measId 1 measObjectId IdMeasObject-f8 reportConfigId idReportConfig-P } quantityConfig SEQUENCE { quantityConfigUTRA SEQUENCE { Cpich-RSCP measQuantityUTRA-FDD Cpich-RSCP J UTRAN S-Measure Not present preRegistrationInfoHRPD Not present							
measId 1 measObjectId IdMeasObject-f8 reportConfigId idReportConfig-P } quantityConfig SEQUENCE { quantityConfigUTRA SEQUENCE { cpich-RSCP measQuantityUTRA-FDD cpich-RSCP } UTRAN } MeasGapConfig-GP1 s-Measure Not present preRegistrationInfoHRPD Not present		1 entry					
measObjectId IdMeasObject-f8 reportConfigId idReportConfig-P } quantityConfig SEQUENCE { quantityConfigUTRA SEQUENCE { measQuantityUTRA-FDD cpich-RSCP UTRAN } measGapConfig MeasGapConfig-GP1 s-Measure Not present preRegistrationInfoHRPD Not present		1					
reportConfigId idReportConfig-P } quantityConfig SEQUENCE { quantityConfigUTRA SEQUENCE { measQuantityUTRA-FDD cpich-RSCP UTRAN } measGapConfig MeasGapConfig-GP1 s-Measure Not present preRegistrationInfoHRPD Not present		IdMeasObject-f8					
<pre> quantityConfig SEQUENCE { quantityConfigUTRA SEQUENCE { measQuantityUTRA-FDD</pre>							
quantityConfigUTRA SEQUENCE { measQuantityUTRA-FDD cpich-RSCP UTRAN } } measGapConfig MeasGapConfig-GP1 s-Measure Not present preRegistrationInfoHRPD Not present	}	<u> </u>					
quantityConfigUTRA SEQUENCE { measQuantityUTRA-FDD cpich-RSCP UTRAN } } measGapConfig MeasGapConfig-GP1 s-Measure Not present preRegistrationInfoHRPD Not present	quantityConfig SEQUENCE {						
measQuantityUTRA-FDD cpich-RSCP UTRAN } } measGapConfig MeasGapConfig-GP1 s-Measure Not present preRegistrationInfoHRPD Not present	quantityConfigUTRA SEQUENCE {						
} measGapConfig s-Measure preRegistrationInfoHRPD MeasGapConfig-GP1 Not present Not present		cpich-RSCP		UTRAN			
s-Measure Not present preRegistrationInfoHRPD Not present	}	<u>'</u>					
s-Measure Not present preRegistrationInfoHRPD Not present	}						
s-Measure Not present preRegistrationInfoHRPD Not present	measGapConfig	MeasGapConfig-GP1					
preRegistrationInfoHRPD Not present							
}							
	}						

Table 9.3.1.4.3-2: *MeasResults*: Additional E-UTRAN FDD - UTRA FDD CPICH RSCP absolute accuracy test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1		
measResultServCell			
rsrpResult	INTEGER(097)		
rsrqResult	INTEGER(034)		
}			
measResultNeighCells CHOICE {			
measResultListUTRA	MeasResultListUTRA		
}			
}			

Table 9.3.1.4.3-3: MeasResultListUTRA: Additional E-UTRAN FDD - UTRA FDD CPICH RSCP absolute accuracy test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultsListEUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId CHOICE {			
fdd	PhysCellIdUTRA-FDD		
tdd	Not Present		
}			
measResult SEQUENCE {			
utra-RSCP	Set according to specific		
	test INTEGER (-591)		
}			
}			

9.3.1.5 Test requirement

The test parameters are given in Tables 9.3.1.4.1-1, 9.3.1.5-1 and 9.3.1.5-2 as below. Table 9.3.1.5-2 and 9.3.1.5-3 define the primary level settings including test tolerances for all tests.

Table 9.3.1.5-1: E-UTRAN FDD cell specific test parameters for UTRAN FDD CPICH RSCP absolute measurement accuracy test in E-UTRAN FDD

Parameter	Unit	Test 1	Test 2
E-UTRAN RF Channel Number		1	
BW _{channel}	MHz	1	0
OCNG Patterns defined in A.3.2.1.1 (OP.1 FDD)		OP.1	FDD

PBCH_RA	dB	
PBCH_RB	dB	
PSS_RA	dB	
SSS_RA	dB	
PCFICH_RB	dB	
PHICH_RA	dB	
PHICH_RB	dB	0
PDCCH_RA	dB	
PDCCH_RB	dB	
PDSCH_RA	dB	
PDSCH_RB	dB	
OCNG_RA ^{Note 1}	dB	
OCNG_RB ^{Note 1}	dB	
$N_{oc}^{ m Note~2}$	dBm/15 kHz	-98
RSRP Note 3	dBm/15 kHz	-94
\hat{E}_{s}/I_{ot}	dB	4
SCH_RP Note 3	dBm/15 kHz	-94
\hat{E}_s/N_{oc}	dB	4
Propagation Condition		AWGN

Note 1: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 9.3.1.5-2: UTRAN FDD cell specific test parameters for UTRAN FDD CPICH RSCP absolute measurement accuracy test in E-UTRAN FDD

Parameter		Unit Test 1		Test 2	
			Cell 2	Cell 2	
CPICH_Ec/lor		dB	-10	-10	
	PCCPCH_Ec/lor	dB	-12	-12	
	SCH_Ec/lor	dB	-12	-12	
	PICH_Ec/lor	dB	-15	-15	
	DPCH_Ec/lor	dB	-	-	
	OCNS_Ec/lor	dB	-0.94	-0.94	
loc	Band I, IV, VI, X, XI, XIX,	dBm/3.84		-93.76	
	XXI	MHz			
	Band II, V, VII		-60.75	-91.76	
	Band III, VIII, XII, XIII, XIV			-90.76	
	Band IX (Note 2)			-92.76	
	Îor/loc	dB	9.54	-9. 19	
CPICH	Band I, IV, VI, X, XI, XIX,	dBm		-112.95	
RSCP,	XXI				
Note 1	Band II, V, VII		-61.21	-110.95	
	Band III, VIII, XII, XIII, XIV			-109.95	
	Band IX (Note 2)			-111.95	
Io, Note 1	Band I, IV, VI, X, XI, XIX,	dBm/3.84		-93.27	
	XXI	MHz			
	Band II, V, VII		-50.75	-91.27	
Band III, VIII, XII, XIII, XIV				-90.27	
	Band IX (Note 2)	1		-92.27	
Pro	opagation condition	-	AWGN	AWGN	

NOTE 1: CPICH RSCP and lo levels have been calculated from other parameters for information purposes.

They are not settable parameters themselves.

NOTE 2: For the UE which supports both Band III and Band IX operating frequencies, the measurement performance requirements for Band III shall apply to the multi-band UE.

NOTE 3: Tests shall be done sequentially. Test 1 shall be done first. After test 1 has been executed test parameters for test 2 shall be set within 5 seconds so that UE does not loose the Cell 2 in between the tests.

Each UTRAN FDD CPICH RSCP absolute measurement accuracy test shall meet the reported values test requirements in table 9.3.1.5-3.

Table 9.3.1.5-3: UTRAN FDD CPICH RSCP absolute measurement accuracy requirements for the reported values

	Test 1	Test 2			
	All bands	Bands 1, 4, 6, 10, 11 18, 19, 21	Bands 2, 5, 7, 17	Bands 3, 8, 12, 13, 14	Band 9
Normal Conditions					
Lowest reported value (Cell 2)	CPICH_RS	CPICH_RSC	CPICH_RS	CPICH_RS	CPICH_RS
	CP _46	P04	CP02	CP01	CP03
Highest reported value (Cell 2)	CPICH_RS	CPICH_RSC	CPICH_RS	CPICH_RS	CPICH_RS
	CP_63	P_9	CP_11	CP_12	CP_10
Extreme Conditions					
Lowest reported value (Cell 2)	CPICH_RS	CPICH_RSC	CPICH_RS	CPICH_RS	CPICH_RS
	CP_43	P05	CP05	CP04	CP05
Highest reported value (Cell 2)	CPICH_RS	CPICH_RSC	CPICH_RS	CPICH_RS	CPICH_RS
	CP_66	P_12	CP_14	CP_15	CP_13

9.3.2 E-UTRAN TDD - UTRA FDD CPICH RSCP absolute accuracy

9.3.2.1 Test purpose

To verify that the E-UTRAN TDD - UTRA FDD CPICH RSCP absolute measurement accuracy is within the specified limits.

9.3.2.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 9 and forward that support UTRA FDD.

9.3.2.3 Minimum conformance requirements

The accuracy requirements shall be the same as the inter-frequency measurement accuracy requirements for FDD CPICH RSCP.

In RRC_CONNECTED state the accuracy requirements shall meet the absolute accuracy requirements in table 9.3.2.3-1

Accuracy [dB] Conditions Band I, IV, VI, X Band II, V and Band III, VIII, **Band IX Parameter** Unit **Normal** XII, XIII and XIV **Extreme** XI, XIX and XXI VII condition condition lo lo lo [dBm/3,84 MHz] [dBm/3,84 MHz] [dBm/3,84 MHz] dBm/3,84 MHz] dBm ± 6 ± 9 -94...-70 -92...-70 -91...-70 -93...-70 CPICH_RSCP -70...-50 dBm -70...-50 -70...-50 -70...-50 ± 8 ± 11

Table 9.3.2.3-1: UTRAN FDD CPICH RSCP absolute accuracy

If the UE, in RRC_CONNECTED state, needs measurement gaps to perform UTRAN FDD measurements, the UTRAN FDD measurement procedure and measurement gap pattern stated in TS 36.133 [4] clause 8.1.2.4.1 shall apply.

The reporting range and mapping specified for FDD CPICH RSCP is defined in Table 9.3.2.3-2. The range in the signalling may be larger than the guaranteed accuracy range.

Reported value	Measured quantity value	Unit
CPICH_RSCP_LEV05	CPICH RSCP <-120	dBm
CPICH_RSCP_LEV04	-120 ≤ CPICH RSCP < -119	dBm
CPICH_RSCP_LEV03	-119 ≤ CPICH RSCP < -118	dBm
CPICH_RSCP_LEV _89	-27 ≤ CPICH RSCP < -26	dBm
CPICH_RSCP_LEV _90	-26 ≤ CPICH RSCP < -25	dBm
CPICH_RSCP_LEV_91	-25 ≤ CPICH RSCP	dBm

Table 9.3.2.3-2: CPICH RSCP measurement report mapping

The normative reference for this requirement is TS 25.133 [21] clauses 9.1.1.2 and 9.1.1.3 and TS 36.133 [4] clause 9.2.1 and A.9.3.2.

9.3.2.4 Test description

9.3.2.4.1 Initial conditions

Test Environment: Normal, TL/VL, TL/VH, TH/VL, TH/VH; as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.22.
- 2. The general test parameter settings are set up according to Table 9.3.2.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are defined in clause 9.3.2.4.3.

5. Cell 1 is the serving E-UTRAN TDD cell and Cell 2 is the target UTRAN FDD cell. Cell 1 is the cell used for connection setup with the power levels set according to Annex C.0 and C.1 for this test.

Table 9.3.2.4.1-1: General test parameters for UTRAN FDD CPICH RSCP absolute measurement accuracy test in E-UTRAN TDD

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference Measurement Channel R.0 TDD	As specified in section A.1.2
PCFICH/PDCCH/PHICH parameters		DL Reference Measurement Channel R.6 TDD	As specified in section A.2.1
E-UTRAN RF Channel Number		1	One E-UTRAN TDD carrier frequency is used.
UTRAN RF Channel Number		1	One UTRAN FDD carrier frequency is used.
E-UTRAN Channel Bandwidth (BW _{channel})	MHz	10	
Active cell		Cell 1	E-UTRAN cell 1 on RF channel number 1
Neighbor cells		Cell 2	UTRAN cell 2 on RF channel number 1
Gap Pattern Id		1	As specified in 3GPP TS 36.133 section 8.1.2.1.
Inter-RAT (UTRAN FDD) measurement quantity		CPICH RSCP	
Monitored UTRA FDD cell		12	UTRA cells on UTRA RF channel 1
list size	+	Newsol	provided in the cell list.
CP length	+	Normal	10.00
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF

9.3.2.4.2 Test procedure

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to Table 9.3.2.5-1 as appropriate. Propagation conditions are set according to Annex B clause B.1.1.
- 3. SS shall transmit an RRCConnectionReconfiguration message on Cell 1.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- $5. \ UE \ shall \ transmit \ periodically \ Measurement Report \ messages.$
- 6. SS shall check CPICH_RSCP reported values of Cell 2 in MeasurementReport messages according to Table 9.3.2.5-3.
- 7. Repeat step 1-6 until the confidence level according to Tables G.2.3-1 in Annex G.2 is achieved.
- 8. Repeat step 1-7 for each sub-test in Table 9.3.2.5-1 as appropriate.

9.3.2.4.3 Message contents

Message contents are according to TS 36.508 [7] values 4.6 with the following exceptions:

Table 9.3.2.4.3-1: MeasConfig- DEFAULT: Additional E-UTRAN TDD - UTRA FDD CPICH RSCP absolute accuracy test requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6	6.6-1 MeasConfig-DEFAUL	Γ:	
Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModList SEQUENCE (SIZE	2 entry		
(1maxObjectId)) OF SEQUENCE {			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f1		
measObject CHOICE {			
measObject EUTRA	MeasObjectEUTRA- GENERIC(f1)	E-UTRA Cell	
}			
}			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f8		
measObject CHOICE {			
measObjectUTRA	MeasObjectUTRA- GENERIC(f8)	UTRA Cell	
}			
}			
}			
reportConfigToRemoveList	Not present		
reportConfigToAddModList SEQUENCE (SIZE (1maxReportConfigId))OF SEQUENCE {	1 entry		
reportConfigld	idReportConfig-P		
reportConfig	ReportConfigEUTRA-		
	PERIODICAL		
}			
measIdToRemoveList	Not present		
measIdToAddModList SEQUENCE (SIZE	1 entry		
(1maxMeasId)) of SEQUENCE {			
measld	1		
measObjectId	IdMeasObject-f8		
reportConfigId	idReportConfig-P		
}			
quantityConfig	QuantityConfig- DEFAULT		
measGapConfig	MeasGapConfig-GP2		
s-Measure	Not present	-	
preRegistrationInfoHRPD	Not present		
speedStatePars	Not present		
}			

Table 9.3.2.4.3-2: *MeasResults*: Additional E-UTRAN TDD - UTRA FDD CPICH RSCP absolute accuracy test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1		
measResultServCell			
rsrpResult	INTEGER(097)		
rsrqResult	INTEGER(034)		
}			
measResultNeighCells CHOICE {			
measResultListUTRA	MeasResultListUTRA		
}			
}			

Table 9.3.2.4.3-3: MeasResultListUTRA: Additional E-UTRAN TDD - UTRA FDD CPICH RSCP absolute accuracy test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultsListEUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId CHOICE {			
fdd	PhysCellIdUTRA-FDD		
tdd	Not Present		
}			
cgi-Info SEQUENCE {			
cellGloballd	CellGlobalIdUTRA		
locationAreaCode	LocationAreaCode		
routingAreaCode	RoutingAreaCode		
plmn-IdentityList	Not present		
}			
measResult SEQUENCE {			
utra-RSCP	According to specific test		
}			
[}			

9.3.2.5 Test requirement

The test parameters are given in Tables 9.3.2.4.1-1, 9.3.2.5-1 and 9.3.2.5-2 as below. Table 9.3.2.5-2 and 9.3.2.5-3 define the primary level settings including test tolerances for all tests.

Each UTRAN FDD CPICH RSCP absolute measurement accuracy test shall meet the reported values test requirements in table 9.3.2.5-3.

Table 9.3.2.5-1: E-UTRAN TDD cell specific test parameters for UTRAN FDD CPICH RSCP absolute measurement accuracy test in E-UTRAN TDD

Parameter	Unit	Test 1	Test 2
E-UTRAN RF Channel Number			1
BW _{channel}	MHz	,	10
Special subframe configuration Note1			6
Uplink-downlink configuration Note 1			1
OCNG Patterns defined in D.2.1		OP 1	I TDD
(OP.1 TDD)		01.1	
PBCH_RA	dB		
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		0
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA ^{Note 2}	dB		
OCNG_RB ^{Note 2}	dB		
$N_{oc}^{ m Note 3}$	dBm/15 kHz	-!	98
RSRP Note 4	dBm/15 kHz	-(94
\hat{E}_{s}/I_{ot}	dB		4
SCH_RP Note 4	dBm/15 kHz	7	94
\hat{E}_s/N_{oc}	dB		4
Propagation Condition			/GN

- Note 1: For special subframe and uplink-downlink configurations see Tables 4.2-1 and 4.2-2 in 3GPP TS 36.211.
- Note 2: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 3: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled.
- Note 4: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 9.3.2.5-2: UTRAN FDD cell specific test parameters for UTRAN FDD CPICH RSCP absolute measurement accuracy test in E-UTRAN TDD

	Parameter	Unit	Test 1	Test 2
			Cell 2	Cell 2
	CPICH_Ec/lor	dB	-10	-10
	PCCPCH_Ec/lor	dB	-12	-12
	SCH_Ec/lor	dB	-12	-12
	PICH_Ec/lor	dB	-15	-15
	DPCH_Ec/lor	dB	-	-
	OCNS_Ec/lor	dB	-0.94	-0.94
loc	Band I, IV, VI, X, XI, XIX,	dBm/3.84		-93.76
	XXI	MHz		
	Band II, V, VII		-60. 75	-91.76
	Band III, VIII, XII, XIII, XIV			-90.76
	Band IX (Note 2)			-92.76
	Îor/loc	dB	9.5419	-9.
CPICH	Band I, IV, VI, X, XI, XIX,	dBm		-112.95
RSCP,	XXI			
Note 1	Band II, V, VII		-61.21	-110.95
	Band III, VIII, XII, XIII, XIV			-109.95
	Band IX (Note 2)			-111.95
Io, Note 1	Band I, IV, VI, X, XI, XIX,	dBm/3.84		-93.27
	XXI	MHz		
	Band II, V, VII		-50. 75	-91.27
	Band III, VIII, XII, XIII, XIV			-90.27
	Band IX (Note 2)			-92.27
Pr	opagation condition	-	AWGN	AWGN

NOTE 1: CPICH RSCP and lo levels have been calculated from other parameters for information purposes. They are not settable parameters themselves.

NOTE 2: For the UE which supports both Band III and Band IX operating frequencies, the measurement performance requirements for Band III shall apply to the multi-band UE.

Tests shall be done sequentially. Test 1 shall be done first. After test 1 has been executed test parameters for test 2 shall be set within 5 seconds so that UE does not loose the Cell 2 in between the tests.

Table 9.3.2.5-3: UTRAN FDD CPICH RSCP absolute measurement accuracy requirements for the reported values

	Test 1	Test 2			
	All bands	Bands 1, 4, 6, 10, 11 18,	Bands 2, 5, 7, 17	Bands 3, 8, 12, 13, 14	Band 9
		19, 21			
Normal Conditions					
Lowest reported value (Cell 2)	CPICH_RS	CPICH_RSC	CPICH_RS	CPICH_RS	CPICH_RS
Lowest reported value (Cell 2)	CP _46	P04	CP02	CP01	CP03
Highest reported value (Cell 2)	CPICH_RS	CPICH_RSC	CPICH_RS	CPICH_RS	CPICH_RS
Highest reported value (Cell 2)	CP_63	P_9	CP_11	CP_12	CP_10
Extreme Conditions					
Lowest reported value (Cell 2)	CPICH_RS	CPICH_RSC	CPICH_RS	CPICH_RS	CPICH_RS
Lowest reported value (Cell 2)	CP_43	P05	CP05	CP04	CP05
High act was autod value (Call 2)	CPICH_RS	CPICH_RSC	CPICH_RS	CPICH_RS	CPICH_RS
Highest reported value (Cell 2)	CP_66	P_12	CP_14	CP_15	CP_13

9.4 UTRAN FDD CPICH Ec/No

9.4.1 E-UTRAN FDD - UTRA FDD CPICH Ec/No absolute accuracy

Editor's note: This section is incomplete. The following aspects are either missing or not yet determined:

- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined

9.4.1.1 Test purpose

To verify that the E-UTRAN FDD - UTRA FDD CPICH Ec/No absolute measurement accuracy is within the specified limits.

9.4.1.2 Test applicability

This test applies to all types of E-UTRA FDD UE release 9 and forward that support UTRA FDD.

9.4.1.3 Minimum conformance requirements

The accuracy requirements shall be the same as the inter-frequency measurement accuracy requirements for FDD CPICH Ec/No

The accuracy requirements in table 9.4.1.3-1 are valid under the following conditions:

 $CPICH_RSCP|_{dBm} \ge -114 dBm$ for Bands I, IV, VI, X and XI,

 $CPICH_RSCP|_{dBm} \ge -113 dBm$ for Band IX,

CPICH_RSCP_{dBm} ≥ -112 dBm for Bands II, V and VII,

 $CPICH_RSCP|_{dBm} \ge -111 dBm$ for Band III, XII, XIII and XIV.

$$\frac{I_o}{\left(\hat{I}_{or}\right)_{in\ dB}}$$
 - $\left(\frac{CPICH_E_c}{I_{or}}\right)_{in\ dB} \le 20dB$

Table 9.4.1.3-1: UTRA FDD CPICH_Ec/lo absolute accuracy

Parameter	Unit	Accuracy [dE	3]		Cond	itions	
		Normal condition	Extreme	Band I, IV	Band II, V	Band III, VIII,	Band IX
			condition	VI, X and XI	and VII	XII, XIII and	
						XIV	
				lo [dBm/3,84	lo [dBm/3,84	lo [dBm/3,84	lo [dBm/3,84
				MHz]	MHz]	MHz]	MHz]
CPICH_Ec/lo	dB	± 1.5 for -14 ≤ CPICH	± 3	-9450	-9250	-9150	-9350
		Ec/Io					
		± 2 for -16 \leq CPICH					
		Ec/lo < -14					
		± 3 for $-20 \le CPICH$					
		Ec/lo < -16					

If the UE, in RRC_CONNECTED state, needs measurement gaps to perform UTRAN FDD measurements, the UTRAN FDD measurement procedure and measurement gap pattern stated in TS 36.133 [4] clause 8.1.2.4.1 shall apply.

The reporting range and mapping specified for FDD CPICH Ec/No is defined in Table 9.4.1.3-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 9.4.1.3-2: UTRA FDD CPICH_Ec/lo measurement report mapping

Reported value	Measured quantity value	Unit
CPICH_Ec/No _00	CPICH Ec/lo < -24	dB
CPICH_Ec/No _01	-24 ≤ CPICH Ec/lo < -23.5	dB
CPICH_Ec/No _02	-23.5 ≤ CPICH Ec/lo < -23	dB
	•••	
CPICH_Ec/No _47	-1 ≤ CPICH Ec/Io < -0.5	dB
CPICH_Ec/No _48	-0.5 ≤ CPICH Ec/lo < 0	dB
CPICH_Ec/No _49	0 ≤ CPICH Ec/lo	dB

The normative reference for this requirement is TS 25.133 [21] clauses 9.1.2.2.2 and TS 36.133 [4] clause 9.2.3 and A.9.4.1.

9.4.1.4 Test description

9.4.1.4.1 Initial conditions

Test Environment: Normal, TL/VL, TL/VH, TH/VL, TH/VH; as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.22.
- 2. Propagation conditions are set according to Annex B clause B.0.
- 3. Message contents are defined in clause 9.4.1.4.3.
- 4. Cell 1 is the serving cell and Cell 2 is the target cell. Cell 1 is the cell used for connection setup with the power levels set according to Annex C.0 and C.1 for this test.

9.4.1.4.2 Test procedure

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to Table 9.4.1.5-2 as appropriate. Propagation conditions are set according to Annex B clause B.1.1.
- 3. SS shall transmit an RRCConnectionReconfiguration message on cell1.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. UE shall transmit periodically MeasurementReport messages.
- 6. SS shall check RSRP reported values of Cell 1 and Cell 2 in MeasurementReport messages according to Table 9.4.1.5-3.
- 7. SS shall check the MeasurementReport message transmitted by the UE until the confidence level according to Tables G.2.3-1 in Annex G.2 is achieved.
- 8. Repeat step 1-7 for each sub-test in Table 9.4.1.5-2 as appropriate.

9.4.1.4.3 Message contents

Message contents are according to TS 36.508 [7] values 4.6 with the following exceptions:

Table 9.4.1.4.3-1: CPICH_Ec/lo measurement measurement configuration

Default Message Contents				
Common contents of system information				
blocks exceptions				
Default RRC messages and information	Table H.3.1-7			
elements contents exceptions				

Table 9.4.1.4.3-2: MeasConfig- DEFAULT: CPICH_Ec/lo measurement measurement configuration

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-1 MeasConfig-DEFAULT:				
Information Element	Value/remark	Comment	Condition	
MeasConfig-DEFAULT ::= SEQUENCE {				
measObjectToRemoveList	Not present			
measObjectToAddModList SEQUENCE (SIZE	2 entry			
(1maxObjectId)) OF SEQUENCE {				
MeasObjectToAddMod SEQUENCE {				
measObjectId	IdMeasObject-f1			
measObject CHOICE {				
measObject EUTRA	MeasObjectEUTRA- GENERIC(f1)	E-UTRA Cell		
}				
}				
MeasObjectToAddMod SEQUENCE {				
measObjectId	IdMeasObject-f8			
measObject CHOICE {				
measObjectUTRA	MeasObjectUTRA- GENERIC(f8)	UTRA Cell		
}				
}				
}				
reportConfigToRemoveList	Not present			
reportConfigToAddModList SEQUENCE (SIZE (1maxReportConfigId))OF SEQUENCE {	1 entry			
reportConfigld	idReportConfig-P			
reportConfig	ReportConfigEUTRA- PERIODICAL			
}				
measIdToRemoveList	Not present			
measIdToAddModList SEQUENCE (SIZE (1maxMeasId)) of SEQUENCE {	1 entry			
measld	1			
measObjectId	IdMeasObject-f8			
reportConfigld	idReportConfig-P			
}	1 - 9			
quantityConfig	QuantityConfig- DEFAULT			
measGapConfig	MeasGapConfig-GP1			
s-Measure	Not present			
preRegistrationInfoHRPD	Not present			
speedStatePars	Not present			
}				

Table 9.4.1.4.3-3: MeasResults: CPICH_Ec/lo measurement measurement configuration

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1		
measResultServCell			
rsrpResult	INTEGER(097)		
rsrqResult	INTEGER(034)		
}			
measResultNeighCells CHOICE {			
measResultListUTRA	MeasResultListUTRA		
}			
}			

Table 9.4.1.4.3-4: MeasResultListUTRA: CPICH_Ec/lo measurement measurement configuration

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultsListEUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId CHOICE {			
fdd	PhysCellIdUTRA-FDD		
tdd	Not Present		
}			
cgi-Info SEQUENCE {			
cellGloballd	CellGlobalIdUTRA		
locationAreaCode	LocationAreaCode		
routingAreaCode	RoutingAreaCode		
plmn-IdentityList	Not present		
}			
measResult SEQUENCE {			
utra-EcN0	According to specific test		
}			
}			

9.4.1.5 Test requirement

The test parameters are given in Tables 9.4.1.5-1, 9.4.1.5-2 and 9.4.1.5-3 as below. Table, 9.4.1.5-2 and 9.4.1.5-3 define the primary level settings including test tolerances for all tests.

Table 9.4.1.5-1: General test parameters for UTRAN FDD CPICH Ec/No absolute measurement accuracy test in E-UTRAN FDD

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference Measurement Channel R.0 FDD	As specified in section A.1.1
PCFICH/PDCCH/PHICH		DL Reference Measurement	As specified in section A. 2.1
parameters		Channel R.6 FDD	
E-UTRAN RF Channel		1	One E-UTRAN FDD carrier frequency is
Number			used.
UTRAN RF Channel		1	One UTRAN FDD carrier frequency is
Number			used.
E-UTRAN Channel	MHz	10	
Bandwidth (BW _{channel})			
Active cell		Cell 1	E-UTRAN cell 1 on RF channel number 1
Neighbor cells		Cell 2	UTRAN cell 2 on RF channel number 1
Gap Pattern Id		0	As specified in 3GPP TS 36.133[4] section
			8.1.2.1.
Inter-RAT (UTRAN FDD) measurement quantity		CPICH Ec/N0	
Monitored UTRA FDD cell		12	UTRA cells on UTRA RF channel 1
list size		12	provided in the cell list.
CP length		Normal	provided in the con not.
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF

Table 9.4.1.5-2: E-UTRAN FDD cell specific test parameters for UTRAN FDD CPICH Ec/No absolute measurement accuracy test in E-UTRAN FDD

Parameter	Unit	Test 1	Test 2	Test 3
E-UTRAN RF Channel Number			1	
BW _{channel}	MHz		10	
OCNG Patterns defined in D.1.1			OP.1 FDD	
(OP.1 FDD)	in .			
PBCH_RA	dB			
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB	0		
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA ^{Note 1}	dB			
OCNG_RB ^{Note 1}	dB			
$N_{oc}^{ m Note~2}$	dBm/15 kHz		-98	
RSRP Note 3	dBm/15 kHz	-94		
\hat{E}_{s}/I_{ot}	dB	4		
SCH_RP Note 3	dBm/15 kHz	-94		
\hat{E}_s/N_{oc}	dB	4		
Propagation Condition			AWGN	

Note 1: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for $N_{\it oc}$ to be fulfilled.

Note 3: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 9.4.1.5-3: UTRAN FDD cell specific test parameters for UTRAN FDD CPICH Ec/No absolute measurement accuracy test in E-UTRAN FDD

	Parameter	Unit	Test 1 Cell 2	Test 2 Cell 2	Test 3 Cell 2
	CPICH_Ec/lor	dB	-10	-10	-10
F	PCCPCH_Ec/lor	dB	-12	-12	-12
	SCH_Ec/lor	dB	-12	-12	-12
	PICH_Ec/lor	dB	-15	-15	-15
	DPCH_Ec/lor	dB	-	-	-
	OCNS_Ec/lor	dB	-0.94	-0.94	-0.94
	Band I, IV, VI, X, XIX	dBm/			-94.46+TT
loc	loc Band II, V, VII, XI Band III, VIII, XII, XIII, XIV Band IX (Note 2)	3.84 MHz	-52.22+TT	-87.27+TT	-92.46+TT -91.46+TT -93.46+TT
	Îor/loc	dB	-1.75+TT	-4.7+TT	-9.54+TT
CP	PICH Ec/Io, Note 1	dBm	-14.0+TT	-16.0+TT	-20.0+TT
lo,	Band I, IV, VI, X, XIX	dBm/			-94+TT
Note	Band II, V, VII, XI	3.84	-50+TT	-86+TT	-92.0+TT
1	Band III, VIII, XII, XIII, XIV	MHz			-91.0+TT
	Band IX (Note 2)				-93+TT
Pro	pagation condition	-	AWGN	AWGN	AWGN

NOTE 1: CPICH Ec/lo and lo levels have been calculated from other parameters for information purposes. They are not settable parameters themselves.

NOTE 2: For the UE which supports both Band III and Band IX operating frequencies, the measurement performance requirements for Band III shall apply to the multi-band UE.

Tests shall be done sequentially. Test 1 shall be done first. After test 1 has been executed test parameters for tests 2 and 3 shall be set within 5 seconds so that UE does not loose the Cell 2 in between the tests.

Each UTRAN FDD CPICH Ec/No absolute measurement accuracy test shall meet the reported values test requirements in table 9.4.1.5-4.

Table 9.4.1.5-4: UTRAN FDD CPICH Ec/No absolute measurement accuracy requirements for the reported values

	Test 1	Test 2	Test 3
Normal Conditions			
Lowest reported value	CPICH_Ec/No_X	CPICH_Ec/No_X	CPICH_Ec/No_X
Highest reported value	CPICH_Ec/No_X	CPICH_Ec/No_X	CPICH_Ec/No_X
Extreme Conditions			
Lowest reported value	CPICH_Ec/No_X	CPICH_Ec/No_X	CPICH_Ec/No_X
Highest reported value	CPICH_Ec/No_X	CPICH_Ec/No_X	CPICH_Ec/No_X

9.4.2 E-UTRAN TDD - UTRA FDD CPICH Ec/No absolute accuracy

Editor's note: This section is incomplete. The following aspects are either missing or not yet determined:

- The Test system uncertainties applicable to this test are undefined
- The Test tolerances applicable to this test are undefined

9.4.2.1 Test purpose

To verify that the E-UTRAN TDD - UTRA FDD CPICH Ec/No absolute measurement accuracy is within the specified limits.

9.4.2.2 Test applicability

This test applies to all types of E-UTRA TDD UE release 9 and forward that support UTRA FDD.

9.4.2.3 Minimum conformance requirements

The accuracy requirements shall be the same as the inter-frequency measurement accuracy requirements for FDD CPICH Ec/No.

The accuracy requirements in table 9.4.2.3-1 are valid under the following conditions:

 $CPICH_RSCP|_{dBm} \ge -114 \ dBm$ for Bands I, IV, VI, X, XI, XIX and XXI,

 $CPICH_RSCP|_{dBm} \ge -113 dBm$ for Band IX

CPICH_RSCP|_{dBm} ≥ -112 dBm for Bands II, V and VII,

 $CPICH_RSCP|_{dBm} \ge -111 dBm$ for Band III, VIII, XII, XIII, XIV and XX.

$$\left. \frac{I_o}{\left(\hat{I}_{or}\right)_{in\ dB}} \right|_{in\ dB} - \left(\frac{CPICH_E_c}{I_{or}} \right)_{in\ dB} \le 20dB$$

Table 9.4.2.3-1: UTRAN FDD CPICH_Ec/lo absolute accuracy

Parameter	Unit	Accuracy [dB]]		Cond	itions	
		Normal condition	Extreme condition	Band I, IV, VI, X, XI, XIX and XXI		Band III, VIII, XII, XIII, XIV and XX	Band IX
				-	-	lo [dBm/3,84	-
				MHz]	MHz]	MHz]	MHz]
CPICH_Ec/lo	dB	\pm 1.5 for -14 \leq CPICH Ec/lo \pm 2 for -16 \leq CPICH Ec/lo < -14 \pm 3 for -20 \leq CPICH Ec/lo < -16	±3	-9450	-9250	-9150	-9350

If the UE, in RRC_CONNECTED state, needs measurement gaps to perform UTRAN FDD measurements, the UTRAN FDD measurement procedure and measurement gap pattern stated in TS 36.133 [4] clause 8.1.2.4.1 shall apply.

The reporting range and mapping specified for FDD CPICH Ec/No is defined in Table 9.4.2.3-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 9.4.2.3-2: UTRAN FDD CPICH_Ec/lo measurement report mapping

Reported value	Measured quantity value	Unit
CPICH_Ec/No _00	CPICH Ec/lo < -24	dB
CPICH_Ec/No _01	-24 ≤ CPICH Ec/lo < -23.5	dB
CPICH_Ec/No _02	-23.5 ≤ CPICH Ec/lo < -23	dB
	•••	•••
CPICH_Ec/No _47	-1 ≤ CPICH Ec/lo < -0.5	dB
CPICH_Ec/No _48	-0.5 ≤ CPICH Ec/lo < 0	dB
CPICH_Ec/No _49	0 ≤ CPICH Ec/Io	dB

The normative reference for this requirement is TS 25.133 [21] clauses 9.1.2.2.2 and TS 36.133 [4] clause 9.2.3 and A.9.4.2.

9.4.2.4 Test description

9.4.2.4.1 Initial conditions

Test Environment: Normal, TL/VL, TL/VH, TH/VL, TH/VH; as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.22.
- 2. The general test parameter settings are set up according to Table 9.4.2.4.1-1.
- 3. Propagation conditions are set according to Annex B clause B.0.
- 4. Message contents are defined in clause 9.4.2.4.3.
- 5. Cell 1 is the serving E-UTRAN TDD cell and Cell 2 is the target UTRAN FDD cell. Cell 1 is the cell used for connection setup with the power levels set according to Annex C.0 and C.1 for this test.

Table 9.4.2.4.1-1: General test parameters for UTRAN FDD CPICH Ec/No absolute measurement accuracy test in E-UTRAN TDD

Parameter	Unit	Value	Comment
PDSCH parameters		DL Reference Measurement Channel R.0 TDD	As specified in section A.1.2
PCFICH/PDCCH/PHICH parameters		DL Reference Measurement Channel R.6 TDD	As specified in section A.2.2
E-UTRAN RF Channel Number		1	One E-UTRAN TDD carrier frequency is used.
UTRAN RF Channel Number		1	One UTRAN FDD carrier frequency is used.
E-UTRAN Channel Bandwidth (BW _{channel})	MHz	10	
Active cell		Cell 1	E-UTRAN cell 1 on RF channel number 1
Neighbor cells		Cell 2	UTRAN cell 2 on RF channel number 1
Gap Pattern Id		0	As specified in 3GPP TS 36.133 section 8.1.2.1.
Inter-RAT (UTRAN FDD) measurement quantity		CPICH Ec/N0	
Monitored UTRA FDD cell list size		12	UTRA cells on UTRA RF channel 1 provided in the cell list.
CP length		Normal	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF

9.4.2.4.2 Test procedure

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to Table 9.4.2.5-1 as appropriate. Propagation conditions are set according to Annex B clause B.1.1.
- 3. SS shall transmit an RRCConnectionReconfiguration message on Cell 1.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. UE shall transmit periodically MeasurementReport messages.

- 6. SS shall check CPICH_Ec/Io reported values of Cell 2 in MeasurementReport messages according to Table 9.4.2.5-3.
- 7. Repeat step 1-6 until the confidence level according to Tables G.2.3-1 in Annex G.2 is achieved.
- 8. Repeat step 1-7 for each sub-test in Table 9.4.2.5-1 as appropriate.

9.4.2.4.3 Message contents

Message contents are according to TS 36.508 [7] values 4.6 with the following exceptions:

Table 9.4.2.4.3-1: *MeasConfig- DEFAULT:* Additional E-UTRAN TDD - UTRA FDD CPICH Ec/No absolute accuracy test requirement

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-1 MeasConfig-DEFAULT:					
Information Element	Value/remark	Comment	Condition		
MeasConfig-DEFAULT ::= SEQUENCE {					
measObjectToRemoveList	Not present				
measObjectToAddModList SEQUENCE (SIZE	2 entry				
(1maxObjectId)) OF SEQUENCE {					
MeasObjectToAddMod SEQUENCE {					
measObjectId	IdMeasObject-f1				
measObject CHOICE {					
measObject EUTRA	MeasObjectEUTRA- GENERIC(f1)	E-UTRA Cell			
}					
}					
MeasObjectToAddMod SEQUENCE {					
measObjectId	IdMeasObject-f8				
measObject CHOICE {					
measObjectUTRA	MeasObjectUTRA- GENERIC(f8)	UTRA Cell			
}					
}					
}					
reportConfigToRemoveList	Not present				
reportConfigToAddModList SEQUENCE (SIZE	1 entry				
(1maxReportConfigId))OF SEQUENCE {					
reportConfigId	idReportConfig-P				
reportConfig	ReportConfigEUTRA- PERIODICAL				
}					
measIdToRemoveList	Not present				
measIdToAddModList SEQUENCE (SIZE	1 entry				
(1maxMeasId)) of SEQUENCE {					
measld	1				
measObjectId	IdMeasObject-f8				
reportConfigId	idReportConfig-P				
}					
quantityConfig	QuantityConfig- DEFAULT				
measGapConfig	MeasGapConfig-GP1				
s-Measure	Not present				
preRegistrationInfoHRPD	Not present				
speedStatePars	Not present				
}					

Table 9.4.2.4.3-2: *MeasResults*: Additional E-UTRAN TDD - UTRA FDD CPICH Ec/No absolute accuracy test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResults ::= SEQUENCE {			
measld	1		
measResultServCell			
rsrpResult	INTEGER(097)		
rsrqResult	INTEGER(034)		
}			
measResultNeighCells CHOICE {			
measResultListUTRA	MeasResultListUTRA		
}			
}			

Table 9.4.2.4.3-3: MeasResultListUTRA: Additional E-UTRAN TDD - UTRA FDD CPICH Ec/No absolute accuracy test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasResultsListEUTRA ::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
physCellId CHOICE {			
fdd	PhysCellIdUTRA-FDD		
tdd	Not Present		
}			
cgi-Info SEQUENCE {			
cellGloballd	CellGlobalIdUTRA		
locationAreaCode	LocationAreaCode		
routingAreaCode	RoutingAreaCode		
plmn-IdentityList	Not present		
}			
measResult SEQUENCE {			
utra-EcN0	According to specific test		
}			
}			

9.4.2.5 Test requirement

The test parameters are given in Tables 9.4.2.4.1-1, 9.4.2.5-1 and 9.4.2.5-2 as below. Table 9.4.2.5-1 and 9.4.2.5-2 define the primary level settings including test tolerances for all tests.

Each UTRAN FDD CPICH Ec/No absolute measurement accuracy test shall meet the reported values test requirements in table 9.4.2.5-3.

Table 9.4.2.5-1: E-UTRAN TDD cell specific test parameters for UTRAN FDD CPICH Ec/No absolute measurement accuracy test in E-UTRAN TDD

$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	Parameter	Unit	Test 1	Test 2	Test 3	
BW_channel	E-UTRAN RF Channel Number		1			
Special subframe configuration Substitute		MHz				
Uplink-downlink configuration 1	Special subframe configuration Note1					
OCNG Patterns defined in D.2.1 (OP.1 TDD) OP.1 TDD PBCH_RA dB PBCH_RB dB PSS_RA dB PSS_RA dB PCFICH_RB dB PHICH_RA dB PDCCH_RB dB PDCCH_RB dB PDSCH_RB dB PDSCH_RB dB OCNG_RANOIGE 2 dB OCNG_RBNOIGE 2 dB Noc Note 3 RSRP Note 4 dBm/15 kHz SCH_RP Note 4 dB SCH_RP Note 4 dBm/15 kHz SCH_RP Note 4 dBm/15 kHz SCH_RP Note 4 dBm/15 kHz SCH_RP Note 4 dBm/15 kHz	Uplink-downlink configuration Note1			1		
OP.1 1DD PBCH_RA	OCNG Patterns defined in D.2.1			OD 4 TDD		
PBCH_RB dB PSS_RA dB SSS_RA dB PCFICH_RB dB PHICH_RA dB PHICH_RB dB PDCCH_RA dB PDCCH_RB dB PDSCH_RA dB PDSCH_RB dB OCNG_RANote 2 dB OCNG_RBNote 2 dB RSRP Note 3 dBm/15 kHz RSRP Note 4 dBm/15 kHz SCH_RP Note 4 dBm/15 kHz	(OP.1 TDD)			OP.1 TUU		
PSS_RA dB SSS_RA dB PCFICH_RB dB PHICH_RA dB PHICH_RB dB PDCCH_RA dB PDCCH_RB dB PDSCH_RB dB PDSCH_RB dB OCNG_RANOTE 2 dB OCNG_RBNOTE 2 dB RSRP Note 3 dBm/15 kHz RSRP Note 4 dBm/15 kHz F _s /I _{ot} dB SCH_RP Note 4 dBm/15 kHz -94 dBm/15 kHz	PBCH_RA	dB				
SSS_RA	PBCH_RB	dB				
PCFICH_RB	PSS_RA	dB				
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	SSS_RA	dB				
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	PCFICH_RB	dB				
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	PHICH_RA	dB				
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	PHICH_RB	dB		0		
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	PDCCH_RA	dB				
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		dB				
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	PDSCH_RA	dB				
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		dB				
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	OCNG_RA ^{Note 2}	dB				
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	OCNG_RB ^{Note 2}	dB				
RSRP Note 4 $\frac{dBm/15}{kHz} -94$ $\hat{E}_s/I_{ot} \qquad dB \qquad 4$ $SCH_RP Note 4 \qquad dBm/15 \\ kHz \qquad -94$				-98		
$\begin{array}{c ccccc} & & & & & & & & & \\ \hline \hat{E}_s / I_{ot} & & & & & & & \\ \hline SCH_RP^{ Note 4} & & & & & & \\ \hline & & & & & & & \\ \hline & & & &$						
$ \begin{array}{c ccccc} \hat{E}_s/I_{ot} & & \text{dB} & & 4 \\ \text{SCH_RP}^{\text{Note 4}} & & \text{dBm/15} \\ & & & \text{kHz} & & & -94 \\ \end{array} $	RSRP			-94		
SCH_RP Note 4 dBm/15 kHz -94	^ /	KHZ				
kHz -94	$E_{\rm s}/I_{ m ot}$	dB	4			
	SCH_RP Note 4		-94			
E_s/N_{oc} dB 4		KHZ		-		
		dB	4			
Propagation Condition AWGN						

Note 1: For special subframe and uplink-downlink configurations see Tables 4.2-1 and 4.2-2 in 3GPP TS 36.211.

Note 4: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 2: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 3: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled.

Table 9.4.2.5-2: UTRAN FDD cell specific test parameters for UTRAN FDD CPICH Ec/No absolute measurement accuracy test in E-UTRAN TDD

	Parameter	Unit	Test 1	Test 2	Test 3	
	Parameter	Offic	Cell 2	Cell 2	Cell 2	
	CPICH_Ec/lor	dB	-10	-10	-10	
F	PCCPCH_Ec/lor	dB	-12	-12	-12	
	SCH_Ec/lor	dB	-12	-12	-12	
	PICH_Ec/lor	dB	-15	-15	-15	
	DPCH_Ec/lor	dB	-	-	-	
	OCNS_Ec/lor	dB	-0.94	-0.94	-0.94	
	Band I, IV, VI, X, XIX	dBm/			-94.46+TT	
loc	Band II, V, VII, XI Band III, VIII, XII, XIII, XIV	3.84 MHz	-52.22+TT	-87.27+TT	-92.46+TT -91.46+TT	
	Band IX (Note 2)				-93.46+TT	
	lor/loc	dB	-1.75+TT	-4.7+TT	-9.54+TT	
CP	PICH Ec/Io, Note 1	dBm	-14.0+TT	-16.0+TT	-20.0+TT	
	Band I, IV, VI, X, XIX	dBm/			-94+TT	
lo, Note	Band II, V, VII, XI	3.84	-50+TT	-86+TT	-92.0+TT	
1	Band III, VIII, XII, XIII, XIV	MHz	-50+11		-00+11	-91.0+TT
	Band IX (Note 2)				-93+TT	
Pro	pagation condition	-	AWGN	AWGN	AWGN	

NOTE 1: CPICH Ec/lo and lo levels have been calculated from other parameters for information purposes. They are not settable parameters themselves.

NOTE 2: For the UE which supports both Band III and Band IX operating frequencies, the measurement performance requirements for Band III shall apply to the multi-band UE.

Tests shall be done sequentially. Test 1 shall be done first. After test 1 has been executed test parameters for tests 2 and 3 shall be set within 5 seconds so that UE does not loose the Cell 2 in between the tests.

Table 9.4.2.5-3: UTRAN FDD CPICH Ec/No absolute measurement accuracy requirements for the reported values

	Test 1	Test 2	Test 3
Normal Conditions			
Lowest reported value	CPICH_Ec/No_X	CPICH_Ec/No_X	CPICH_Ec/No_X
Highest reported value	CPICH_Ec/No_X	CPICH_Ec/No_X	CPICH_Ec/No_X
Extreme Conditions			
Lowest reported value	CPICH_Ec/No_X	CPICH_Ec/No_X	CPICH_Ec/No_X
Highest reported value	CPICH_Ec/No_X	CPICH_Ec/No_X	CPICH_Ec/No_X

9.5 Void

TBD

9.6 GSM carrier RSSI

9.6.1 GSM RSSI absolute accuracy for E-UTRAN FDD

FFS

9.6.2 GSM RSSI absolute accuracy for E-UTRAN TDD

Editor's note: This section is incomplete. The following aspects are either missing or not yet determined:

• The Test system uncertainties applicable to this test are undefined

• The Test tolerances applicable to this test are undefined

9.6.2.1 Test purpose

To verify that the GSM RSSI measurement accuracy is within the specified limits.

9.6.2.2 Test applicability

This test applies all the types of E-UTRA TDD UE release 9 and forward that support GSM.

9.6.2.3 Minimum conformance requirements

The R.M.S received signal level at the receiver input shall be measured by the MS and the BSS over the full range of -110 dBm to -48 dBm with an absolute accuracy of ± 4 dB from -110 dBm to -70 dBm under normal conditions and ± 6 dB over the full range under both normal and extreme conditions. The R.M.S received signal level at the receiver input shall be measured by the MS above -48 dBm up to -38 dBm with an absolute accuracy of ± 9 dB under both normal and extreme conditions.

This requirement is summarized in Table 9.6.2.3-1.

Table 9.6.2.3-1: GSM RXLEV absolute accuracy

Parameter	Parameter Unit		Accuracy [dB]			
Parameter	Offic	Normal condition	Extreme condition	Input level dBm		
	dBm	± 4	± 6	-11070		
RXLEV	dBm	± 6	± 6	-7048		
	dBm	± 9	± 9	-4838		

The reporting range and mapping for RXLEV is summarized in Table 9.6.2.3-2.

Table 9.6.2.3-2: GSM RSSI measurement report mapping

Reported value	Measured quantity value	Unit
RXLEV_00	RXLEV < -110	dBm
RXLEV_01	-110 ≤ RXLEV < -109	dBm
RXLEV_02	-109 ≤ RXLEV < -108	dBm
	•••	•••
RXLEV_61	-48 ≤ RXLEV < -47	dBm
RXLEV_62	-49 ≤ RXLEV < -48	dBm
RXLEV_63	-48 ≤ RXLEV	dBm

The normative reference for this requirement is:

For E-UTRA: TS 36.133 [4] clause 9.4.1 and A.9.6.2

For GSM: TS 45.008 [15] clause 8.1.2 and 8.1.4.

9.6.2.4 Test description

9.6.2.4.1 Initial conditions

Test Environment: Normal, TL/VL, TL/VH, TH/VL, TH/VH; as defined in TS 36.508 [7] clause 4.1.

Frequencies to be tested: According to Annex E table E-1 and TS 36.508 [7] clauses 4.4.2 and 4.3.1.

Channel Bandwidth to be tested: 10 MHz as defined in TS 36.508 [7] clause 4.3.1.

- 1. Connect the SS (node B emulator) and AWGN noise sources to the UE antenna connectors as shown in TS 36.508 [7] Annex A figure A.14.
- 2. The general test parameter settings are set up according to Table 9.6.2.4.1-1.

- 3. Propagation conditions are set according to See TS 36.521-1 Annex B.
- 4. Message contents are defined in clause 9.6.2.4.3.
- 5. There is one E-UTRA TDD cell and one GSM cell specified in each test. Cell 1 is the cell used for call setup with the power level set according to TS 36.521-1 Annex C.0 and TS 36.521-3 Annex C.1 for this test.

Table 9.6.2.4.1-1: General GSM Carrier RSSI test parameters

Parameter	Unit	Value	Comment
PDSCH parameters (E-UTRAN TDD)		DL Reference Measurement Channel R.0 TDD	As specified in section A.3.1.1.2.
PCFICH/PDCCH/PHICH parameters (E-UTRAN TDD)		DL Reference Measurement Channel R.6 TDD	As specified in section A.3.1.2.2.
Active cell	-	Cell 1	
DRX	-	OFF	
Uplink-downlink configuration of cell 1		1	As specified in table 4.2.2 in TS 36.211
Special subframe configuration of cell 1		6	As specified in table 4.2.1 in TS 36.211
Gap pattern Id		1	As specified in 3GPP TS 36.133 section 8.1.2.1.
Filtering coefficient	-	0	L3 filtering is not used.
Inter-RAT measurement quantity		GSM Carrier RSSI	
Monitored cell list size		6 GSM neighbours including ARFCN 1	Included in the Measurement control information

9.6.2.4.2 Test procedure

The three tests consist of Cell 1, serving cell and Cell 2, target cell.

- 1. Ensure the UE is in State 3A or 3A-RF according to TS 36.508 [7] clause 4.5.3A or 5.2A.2.
- 2. Set the parameters according to Table 9.6.2.5-1, 9.6 2.5-2 and 9.6 2.5-3 as appropriate. Propagation conditions are set according to TS 36.521-1 Annex B clause B.1.1.
- 3. SS shall transmit an RRCConnectionReconfiguration message.
- 4. The UE shall transmit RRCConnectionReconfigurationComplete message.
- 5. UE shall transmit periodically MeasurementReport messages.
- 6. SS shall check the GSM RSSI value in MeasurementReport messages according to Table 9.6.2.5-4.
- 7. The SS shall check MeasurementReport messages transmitted by the UE until the confidence level according to TS 36.521-3 Tables G.2.3-1 in Annex G.2 is achieved.
- 8. Repeat step 1-7 for each sub-test in Table 9.6.2.5-2 and 9.6.2.5-3 as appropriate.

9.6.2.4.3 Message contents

Message contents are according to TS 36.508 [7] values 4.6 with the following exceptions:

Table 9.6.2.4.3-1: MeasuredResults: Additional GSM RSSI measurement accuracy test requirement

Derivation Path: 36.331 clause 6.3.5			
Information Element	Value/remark	Comment	Condition
MeasuredResults ::= SEQUENCE {			
measld	1	Identifies the measurement id for the reporting being performed	
measResultServing SEQUENCE {			
rsrpResult	RSRP-Range	Set according to specific test	
rsrqResult	RSRQ-Range	Set according to specific test	
}			
neighbouringMeasResults CHOICE {			
MeasResultListGERAN	MeasResultListGERAN		
}			

Table 9.6.2.4.3-2: MeasResultListGERAN: Additional GSM measurement accuracy test requirement

Information Element	Value/remark	Comment	Condition
MeasResultListGERAN::= SEQUENCE (SIZE			
(1maxCellReport)) OF SEQUENCE {			
carrierFreq	CarrierFreqGERAN		
physCellId	physCellId GERAN		
Cgi-Info SEQUENCE{			
cellGloaballd	CellGlobalIdGERAN		
routingAreaCode	BIT STRING (SIZE (8))		
}			
measResult SEQUENCE {			
Rssi	INTEGER (063)	Set according to	
		specific test	
}			
}			

9.6.2.5 Test requirement

Table 9.6.2.5-1, 9.6.2.5-2 and 9.6.2.5-3 defines the primary level settings including test tolerances for all tests.

The GSM RSSI measurement accuracy test for the reported values shall meet the requirements in Table 9.6.2.5-4.

Table 9.6.2.5-1: E-UTRAN TDD Cell specific test parameters for GSM Carrier RSSI accuracy test in E-UTRAN TDD

Parameter	Unit	Tests 1 - 12
E-UTRAN RF Channel		4
Number		1
BW _{channel}	MHz	10
OCNG Patterns defined in		OP.1 TDD
A.3.2.2.1 (OP.1 TDD)		OI .I IDD
PBCH_RA	dB	
PBCH_RB	dB	
PSS_RA	dB	
SSS_RA	dB	
PCFICH_RB	dB	
PHICH_RA	dB	
PHICH_RB	dB	0
PDCCH_RA	dB	
PDCCH_RB	dB	
PDSCH_RA	dB	
PDSCH_RB	dB	
OCNG_RA ^{Note 1}	dB	
OCNG_RB ^{Note 1}	dB	
N_{oc} Note 2	dBm/15 kHz	-98
RSRP Note 3	dBm/15 kHz	-94
\hat{E}_{s}/I_{ot}	dB	4
SCH_RP Note 3	dBm/15 kHz	-94
\hat{E}_s/N_{oc}	dB	4
Propagation Condition		AWGN

Note 1: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 9.6.2.5-2: BCCH signal levels at receiver input in dBm

Sub- test	BCCH1	BCCH2	ВССН3	ВССН4	ВССН5	ВССН6
1	-38.5	-38.5	NA	NA	NA	NA
2	-48.5	-48.5	NA NA	NA NA	NA NA	NA NA
3	-70.5	-70.5	NA	NA	NA	NA
4	-109.5	-109.5	NA	NA	NA	NA
5	-57.5	NA	-54.5	NA	NA	NA
6	-64.5	NA	-59.5	NA	NA	NA
7	-71.5	NA	NA	-64.5	NA	NA
8	-78.5	NA	NA	-69.5	NA	NA
9	-85.5	NA	NA	NA	-74.5	NA
10	-92.5	NA	NA	NA	-79.5	NA
11	-99.5	NA	NA	NA	NA	-84.5
12	-106.5	NA	NA	NA	NA	-89.5

Table 9.6.2.5-3: ARFCN numbers for GSM cells

GSM band	BCCH1	BCCH2	ВССН3	BCCH4	BCCH5	ВССН6
GSM 450	276	293	264	269	281	288
GSM 480	323	340	311	316	328	335
GSM 750	475	511	440	455	485	500
GSM 850	189	251	150	170	210	230
GSM 900	62	124	20	40	80	100
DCS 1800	700	885	585	660	790	835
PCS 1900	700	805	585	660	790	550

Note: As defined in clause 3A.1, the test shall run without frequency overlapping between E-UTRA and GSM cells. The ARFCN numbers defined here, can be updated accordingly (even E-UTRA band specific) to avoid possible overlapping.

Table 9.6.2.5-4: GSM Carrier RSSI absolute accuracy requirements for the reported values

Sub- test	Normal		TL/VL & TH/VH		
	Lowest reported value for BCCH1	Highest reported value for BCCH1	Lowest reported value for BCCH1	Highest reported value for BCCH1	
1	RXLEV_x - TT	RXLEV_y + TT	RXLEV_x - TT	RXLEV_y + TT	
2	RXLEV_x - TT	RXLEV_y + TT	RXLEV_x - TT	$RXLEV_y + TT$	
3	RXLEV_x - TT	$RXLEV_y + TT$	RXLEV_x - TT	$RXLEV_y + TT$	
4	RXLEV_x - TT	$RXLEV_y + TT$	RXLEV_x - TT	$RXLEV_y + TT$	
5	RXLEV_x - TT	$RXLEV_y + TT$	RXLEV_x - TT	$RXLEV_y + TT$	
6	RXLEV_x - TT	$RXLEV_y + TT$	RXLEV_x - TT	$RXLEV_y + TT$	
7	RXLEV_x - TT	RXLEV_y + TT	RXLEV_x - TT	$RXLEV_y + TT$	
8	RXLEV_x - TT	RXLEV_y + TT	RXLEV_x - TT	$RXLEV_y + TT$	
9	RXLEV_x - TT	RXLEV_y + TT	RXLEV_x - TT	$RXLEV_y + TT$	
10	RXLEV_x - TT	RXLEV_y + TT	RXLEV_x - TT	$RXLEV_y + TT$	
11	RXLEV_x - TT	$RXLEV_y + TT$	RXLEV_x - TT	RXLEV_y + TT	
12	RXLEV_x - TT	RXLEV_y + TT	RXLEV_x - TT	RXLEV_y + TT	
Note: It is	not mandatory for the UI	E to report BCCH1 in ste	p 12	-	

For the test to pass, the ratio of successful reported values in each sub-test shall be more than 90% with a confidence level of 95%.

Annex A (normative): Measurement Channels

A.1 PDSCH

A.1.1 FDD

Table A.1.1-1: PDSCH Reference Measurement Channels for FDD

Parameter	Unit	Value					
Reference channel		R.2			R.0	R.1	
		FDD			FDD	FDD	
Channel bandwidth	MHz	1.4	3	5	10	10	20
Number of transmitter antennas		1			1	2	
Allocated resource blocks (Note 4)		2			24	24	
Allocated subframes per Radio Frame		10			10	10	
Modulation		QPSK			QPSK	QPSK	
Target Coding Rate		1/3			1/3	1/3	
Information Bit Payload							
For Sub-Frames 4, 9	Bits	120			2088	2088	
For Sub-Frame 5	Bits	104			2088	1736	
For Sub-Frame 0	Bits	32			1736	1736	
For Sub-Frame 1, 2, 3, 6, 7, 8	Bits	0			0	0	
Number of Code Blocks per Sub-Frame							
(Note 5)							
For Sub-Frames 4, 9		1			1	1	
For Sub-Frame 5		1			1	1	
For Sub-Frame 0		1			1	1	
For Sub-Frame 1, 2, 3, 6, 7, 8		0			0	0	
Binary Channel Bits Per Sub-Frame							
For Sub-Frames 4, 9	Bits	456			6624	6336	
For Sub-Frame 5	Bits	360			6336	6048	
For Sub-Frame 0	Bits	176			5784	5520	
For Sub-Frame 1, 2, 3, 6, 7, 8	Bits	0			0	0	
Max. Throughput averaged over 1 frame	kbps	37.6			800	765	

Note 1: 2 symbols allocated to PDCCH for 10 MHz channel BW. 4 symbols allocated to PDCCH for 1.4 MHz channel BW.

Note 2: Reference signal, synchronization signals and PBCH allocated as defined in 3GPP TS 36.211 [9].

Note 3: If necessary the information bit payload size can be adjusted to facilitate the test implementation. The payload sizes are defined in 3GPP TS 36.213 [8].

Note 4: Allocation is located in the middle of bandwidth.

Note 5: If more than one Code Block is present, an additional CRC sequence of L = 24 Bits is attached to each Code Block (otherwise L = 0 Bit).

Note 6: PDSCH allocation applies only to subframes not configured as PRS subframes.

A.1.2 TDD

Table A.1.2-1: PDSCH Reference Measurement Channels for TDD

Parameter	Unit			Val	ue		
Reference channel		R.2			R.0	R.1	
		TDD			TDD	TDD	
Channel bandwidth	MHz	1.4	3	5	10	10	20
Number of transmitter antennas		1			1	2	
Allocated resource blocks (Note 4)		2			24	24	
Uplink-Downlink Configuration (Note 5)		1			1	1	
Special Subframe Configuration (Note 6)		6			6	6	
Allocated subframes per Radio Frame		6			6	6	
Modulation		QPSK			QPSK	QPSK	
Target Coding Rate		1/3			1/3	1/3	
Information Bit Payload							
For Sub-Frames 4,9	Bits	120			2088	2088	
For Sub-Frame 5	Bits	104			2088	2088	
For Sub-Frame 0	Bits	56			2088	1736	
For Sub-Frame 1, 6 (DwPTS)	Bits	56			1032	1032	
Number of Code Blocks per Sub-Frame							
(Note 7)							
For Sub-Frames 4,9		1			1	1	
For Sub-Frame 5		1			1	1	
For Sub-Frame 0		1			1	1	
For Sub-Frame 1, 6 (DwPTS)		1			1	1	
Binary Channel Bits Per Sub-Frame							
For Sub-Frames 4,9	Bits	456			6624	6336	
For Sub-Frame 5	Bits	408			6480	6192	
For Sub-Frame 0	Bits	224			5928	5664	
For Sub-Frame 1, 6 (DwPTS)	Bits	272			3696	3504	
Max. Throughput averaged over 1 frame	Mbps	0.0561 2			1.0416	1.0064	

- Note 1: 2 symbols allocated to PDCCH for 10 MHz channel BW. 4 symbols allocated to PDCCH for 1.4 MHz channel BW. For special subframe (1 & 6) only 2 OFDM symbols are allocated to PDCCH for all bandwidths.
- Note 2: Reference signal, synchronization signals and PBCH allocated as defined in 3GPP TS 36.211 [9].4 symbols allocated to PDCCH for 1.4 MHz channel BW
- Note 3: If necessary the information bit payload size can be adjusted to facilitate the test implementation. The payload sizes are defined in 3GPP TS 36.213 [8].Reference signal, synchronization signals and PBCH allocated as defined in 3GPP TS 36.211 [9].
- Note 4: Allocation is located in the middle of bandwidth. If necessary the information bit payload size can be adjusted to facilitate the test implementation. The payload sizes are defined in 3GPP TS 36.213 [8].
- Note 5: As per Table 4.2-2 in TS 36.211 [16].
- Note 6: As per Table 4.2-1 in TS 36.211 [16].
- Note 7: f more than one Code Block is present, an additional CRC sequence of L = 24 Bits is attached to each Code Block (otherwise L = 0 Bit).
- Note 8: PDSCH allocation applies only to subframes not configured as PRS subframes.

A.2 PCFICH/PDCCH/PHICH

A.2.1 FDD

Table A.2.1-1: PCFICH/PDCCH/PHICH Reference Channel for FDD

Parameter	Unit		Val	ue		
Reference channel		R.8		R.6	R.7	
		FDD		FDD	FDD	
Channel bandwidth	MHz	1.4		10	10	
Number of transmitter antennas		1		1	2	
Control region OFDM symbolsNote1	symbols	4		2	2	
Aggregation level	CCE	2		8	8	
		(Note 6)				
DCI Format		Note 3		Note 3	Note 3	
Cell ID		Note 4		Note 4	Note 4	
Payload (without CRC)	Bits	Note 5		Note 5	Note 5	

Note 1: The control region consists of PCFICH, PHICH and PDCCH.

Note 2: DCI formats are defined in 3GPP TS 36.212.

Note 3: DCI format shall depend upon the test configuration.

Note 4: Cell ID shall depend upon the test configuration.

Note 5: Payload size shall depend upon the test configuration.

Note 6: For PDCCH using SI/RA/P-RNTI, Aggregation level 4 is used.

A.2.2 TDD

Table A.2.2-1: PCFICH/PDCCH/PHICH Reference Channel for TDD

Parameter	Unit		Val	ue		
Reference channel		R.8		R.6	R.7	
		TDD		TDD	TDD	
Channel bandwidth	MHz	1.4		10	10	
Number of transmitter antennas		1		1	2	
Control region OFDM symbols ^{Note1}	symbols	4		2	2	
		(Note 6)				
Aggregation level	CCE	2		8	8	
		(Note 7)				
DCI Format		Note 3		Note 3	Note 3	
Cell ID		Note 4		Note 4	Note 4	
Payload (without CRC)	Bits	Note 5		Note 5	Note 5	

Note 1: The control region consists of PCFICH, PHICH and PDCCH.

Note 2: DCI formats are defined in 3GPP TS 36.212.

Note 3: DCI format shall depend upon the test configuration.

Note 4: Cell ID shall depend upon the test configuration.

Note 5: Payload size shall depend upon the test configuration.

Note 6: Only 2 OFDM symbols for special subframes 1 and 6.

Note 7: For PDCCH using SI/RA/P-RNTI, Aggregation level 4 is used.

A.3 PUSCH

This rule applies to E-UTRA cell(s), which the UE is connected to. The UE is in RRC-CONNECTED mode.

When signalling or data payloads are expected to be sent on the PUSCH, the UE may be provided in advance with PUSCH resources by the SS. For sake of simplicity the PUSCH scheduling may also occur continuously over many consecutive subframes. These options shall not be used if:

1) stated otherwise in the test description, or

2) the transmission of PUSCH and UL scheduling information affects the test purpose (e.g. DRX, PUCCH reception etc.)

For handover test cases, after RRC Connection reconfiguration message implying handover is sent, the UE shall be provided continuously with PUSCH resources by the SS in the source cell. This is done in order to make the requirement UE implementation agnostic, w.r.t. different delays caused by different handling of positive RLC acknowledgements, which are not mandatory and of lower priority than the handover procedure progress (Subclause 5.3.5.4 [5]).

If a PUSCH scheduling occurs, the SS sends uplink scheduling information via PDCCH DCI format 0 for C-RNTI to the UE. The UE sends uplink MAC padding bits on the PUSCH.

Annex B (normative): Propagation Conditions

B.0 No interference

See TS 36.521-1[10] Annex B. 0.

B.1 Static propagation condition

See TS 36.521-1[10] Annex B.1 and B.1.1

B.2 Multi-path fading Propagation Conditions

See TS 36.521-1[10] Annex B.2,B.2.1 and B.2.2

Annex C (normative): Downlink Physical Channels

C.0 Downlink signal

See TS 36.521-1[10] Annex C.0.

C.1 General

See TS 36.521-1[10] Annex C.1.

C.2 Set-up

.See TS 36.521-1[10] Annex C.2.

Annex D (normative): OFDMA Channel Noise Generator (OCNG)

D.1 OCNG Patterns for FDD

The following OCNG patterns are used for modelling allocations to virtual UEs (which are not under test) and/or allocations used for MBSFN. The OCNG pattern for each sub frame specifies the allocations that shall be filled with OCNG, and furthermore, the relative power level of each such allocation.

The system information is scheduled in the allocations reserved for the OCNG patterns, in the subframes without MBSFN transmission. For this purpose the number of the allocated RB-s in the OCNG patterns can be reduced as necessary.

In each test case the OCNG is expressed by parameters OCNG_RA and OCNG_RB which together with a relative power level (γ) specifies the PDSCH EPRE-to-RS EPRE ratios in OFDM symbols with and without reference symbols, respectively. The relative power, which is used for modelling boosting per virtual UE allocation, is expressed by:

$$\gamma_i = PDSCH_i _RA/OCNG_RA = PDSCH_i _RB/OCNG_RB$$

where γ_i denotes the relative power level of the *i:th* virtual UE. The parameter settings of OCNG_RA, OCNG_RB, and the set of relative power levels γ are chosen such that when also taking allocations to the UE under test into account, as given by a PDSCH reference channel, a constant transmitted power spectral density that is constant on an OFDM symbol basis is targeted.

Moreover the OCNG pattern is accompanied by a PCFICH/PDCCH/PHICH reference channel which specifies the control region. For any aggregation and PHICH allocation, the PDCCH and any unused PHICH groups are padded with resource element groups with a power level given respectively by PDCCH_RA/RB and PHICH_RA/RB as specified in the test case such that a total power spectral density in the control region that is constant on an OFDM symbol basis is targeted.

D.1.1 OCNG FDD pattern 1: outer resource blocks allocation in 10 MHz

Table D.1.1-1: OP.1 FDD: OCNG FDD Pattern 1

Allocation n_{PRB}	Rel	Relative power level $\gamma_{\it PRB}$ [dB]				
	Subframe					
	0	5	4,9	1-3, 6-8		
0 - 12	0	0	0	N/A	Note 1	N/A
37 - 49	0	0	0	N/A	Note i	
0-49	N/A	N/A	N/A	Note 4	N/A	Note 2

- Note 1: These physical resource blocks are assigned to an arbitrary number of virtual UEs with one PDSCH per virtual UE; the data transmitted over the OCNG PDSCHs shall be uncorrelated pseudo random data, which is QPSK modulated. The parameter γ_{PRB} is used to scale the power of PDSCH.
- Note 2: Each physical resource block (PRB) is assigned to MBSFN transmission. The data in each PRB shall be uncorrelated with data in other PRBs over the period of any measurement. The MBSFN data shall be QPSK modulated. PMCH symbols shall not contain cell-specific Reference Signals. PMCH subframes shall contain cell-specific Reference Signals only in the first symbol of the first time slot. The parameter γ_{PRB} is used to scale the power of PMCH.
- Note 3: If two or more transmit antennas with CRS are used in the test, the PDSCH part of OCNG shall be transmitted to the virtual users by all the transmit antennas with CRS and according to the antenna transmission mode 2. The parameter γ_{PRB} applies to each antenna port separately, so the transmit power of the PDSCH part of OCNG is equal between all the transmit antennas with CRS used in the test. The antenna transmission modes are specified in section 7.1 in 3GPP TS 36.213.

Note 4: 0 dB for 1 transmit antenna with CRS, +3 dB for 2 transmit antennas with CRS.

N/A: Not Applicable

D.1.2 OCNG FDD pattern 2: full bandwidth allocation in 10 MHz

Table D.1.2-1: OP.2 FDD: OCNG FDD Pattern 2

Allocation	Rel	Relative power level $\gamma_{\it PRB}$ [dB]						
$n_{\it PRB}$		Subframe						
	0	5	4, 9	1 - 3, 6 - 8				

0 - 49	0	0	0	N/A	Note 1	N/A
0 - 49	N/A	N/A	N/A	Note 4	N/A	Note 2

641

Note 1: These physical resource blocks are assigned to an arbitrary number of virtual UEs with one PDSCH per virtual UE; the data transmitted over the OCNG PDSCHs shall be uncorrelated pseudo random data, which is QPSK modulated. The parameter γ_{PRB} is used to scale the power of PDSCH.

Note 2: Each physical resource block (PRB) is assigned to MBSFN transmission. The data in each PRB shall be uncorrelated with data in other PRBs over the period of any measurement. The MBSFN data shall be QPSK modulated. PMCH symbols shall not contain cell-specific Reference Signals. PMCH subframes shall contain cell-specific Reference Signals only in the first symbol of the first time slot. The parameter γ_{PRB} is used to scale the power of PMCH.

Note 3: If two or more transmit antennas with CRS are used in the test, the PDSCH part of OCNG shall be transmitted to the virtual users by all the transmit antennas with CRS and according to the antenna transmission mode 2. The parameter γ_{PRB} applies to each antenna port separately, so the transmit power of the PDSCH part of OCNG is equal between all the transmit antennas with CRS used in the test. The antenna transmission modes are specified in section 7.1 in 3GPP TS 36 213

Note 4: 0 dB for 1 transmit antenna with CRS, +3 dB for 2 transmit antennas with CRS.

N/A: Not Applicable

D.1.3 OCNG FDD pattern 3: outer resource blocks allocation in 1.4 MHz

Table A.3.2.1.3-1: OP.3 FDD: OCNG FDD Pattern 3

Allocation	Re	PDSCH Data	PMCH Data			
$n_{\it PRB}$		Subfr	ame		Data	Data
	0	5	4,9	1-3, 6-8		
0 - 1	0	0	0	N/A	Note 1	N/A
4 - 5	0	0	0	N/A	Note	IN/A
0 - 5	N/A	N/A	N/A	Note 4	N/A	Note 2

Note 1: These physical resource blocks are assigned to an arbitrary number of virtual UEs with one PDSCH per virtual UE; the data transmitted over the OCNG PDSCHs shall be uncorrelated pseudo random data, which is QPSK modulated. The parameter γ_{PRB} is used to scale the power of PDSCH.

Note 2: Each physical resource block (PRB) is assigned to MBSFN transmission. The data in each PRB shall be uncorrelated with data in other PRBs over the period of any measurement. The MBSFN data shall be QPSK modulated. PMCH symbols shall not contain cell-specific Reference Signals. PMCH subframes shall contain cell-specific Reference Signals only in the first symbol of the first time slot. The parameter γ_{PRB} is used to scale the power of PMCH.

Note 3: If two or more transmit antennas with CRS are used in the test, the PDSCH part of OCNG shall be transmitted to the virtual users by all the transmit antennas with CRS and according to the antenna transmission mode 2. The parameter γ_{PRB} applies to each antenna port separately, so the transmit power of the PDSCH part of OCNG is equal between all the transmit antennas with CRS used in the test. The antenna transmission modes are specified in section 7.1 in 3GPP TS 36.213.

Note 4: 0 dB for 1 transmit antenna with CRS, +3 dB for 2 transmit antennas with CRS.

D.1.4 OCNG FDD pattern 4: full bandwidth allocation in 1.4 MHz

Table A.3.2.1.4-1: OP.4 FDD: OCNG FDD Pattern 4

Allocation	Relative power level γ_{PRB} [db]							
$n_{{\scriptscriptstyle PRB}}$		Subframe						
	0	5	4, 9	1 - 3, 6 - 8				
0 - 5	0	0	0	N/A	Note 1	N/A		
0 - 5	N/A	N/A	N/A	Note 4	N/A	Note 2		

- Note 1: These physical resource blocks are assigned to an arbitrary number of virtual UEs with one PDSCH per virtual UE; the data transmitted over the OCNG PDSCHs shall be uncorrelated pseudo random data, which is QPSK modulated. The parameter γ_{PRB} is used to scale the power of PDSCH.
- Note 2: Each physical resource block (PRB) is assigned to MBSFN transmission. The data in each PRB shall be uncorrelated with data in other PRBs over the period of any measurement. The MBSFN data shall be QPSK modulated. PMCH subframes shall contain cell-specific Reference Signals only in the first symbol of the first time slot. The parameter γ_{PRB} is used to scale the power of PMCH.
- Note 3: If two or more transmit antennas with CRS are used in the test, the PDSCH part of OCNG shall be transmitted to the virtual users by all the transmit antennas with CRS and according to the antenna transmission mode 2. The parameter γ_{PRB} applies to each antenna port separately, so the transmit power of the PDSCH part of OCNG is equal between all the transmit antennas with CRS used in the test. The antenna transmission modes are specified in section 7.1 in 3GPP TS 36.213.

Note 4: 0 dB for 1 transmit antenna with CRS, +3 dB for 2 transmit antennas with CRS.

D.1.5 OCNG FDD pattern 5: outer resource blocks allocation in 10 MHz (without MBSFN)

Table D.1.5-1: OP.5 FDD: OCNG FDD Pattern 5

Allocation	Re	PDSCH Data					
$n_{\it PRB}$		Subframe (Note 1)					
	0 5 4, 9 1 - 3, 6 - 8						
0 - 12	0	0	0	N/A			
37 - 49	0	0	0	N/A	Note 2		
0 - 49	N/A	N/A	N/A	0			

Note 1: PDSCH allocation applies only to subframes not configured as PRS subframes.

Note 2: These physical resource blocks are assigned to an arbitrary number of virtual UEs with one PDSCH per virtual UE; the data transmitted over the OCNG PDSCHs shall be uncorrelated pseudo random data, which is QPSK modulated. The

parameter γ_{PRB} is used to scale the power of PDSCH.

Note 3: If two or more transmit antennas with CRS are used in the test, the PDSCH part of OCNG shall be transmitted to the virtual users by all the transmit antennas with

CRS and according to the antenna transmission mode 2. The parameter γ_{PRB} applies to each antenna port separately, so the transmit power of the PDSCH part of OCNG is equal between all the transmit antennas with CRS used in the test. The antenna transmission modes are specified in section 7.1 in 3GPP TS 36.213.

N/A: Not Applicable

D.1.6 OCNG FDD pattern 6: full bandwidth allocation in 10 MHz (without MBSFN)

Table D.1.6-1: OP.6 FDD: OCNG FDD Pattern 6

Allocation	Re	PDSCH Data			
$n_{{\it PRB}}$					
	0	5	4, 9	1 - 3, 6 - 8	
0 - 49	0	0	0	0	Note 2

Note 1: PDSCH allocation applies only to subframes not configured as PRS subframes. Note 2: These physical resource blocks are assigned to an arbitrary number of virtual UEs with one PDSCH per virtual UE; the data transmitted over the OCNG PDSCHs shall be uncorrelated pseudo random data, which is QPSK modulated. The parameter γ_{PRB} is used to scale the power of PDSCH.

Note 3: If two or more transmit antennas with CRS are used in the test, the PDSCH part of OCNG shall be transmitted to the virtual users by all the transmit antennas with CRS and according to the antenna transmission mode 2. The parameter γ_{PRB} applies to each antenna port separately, so the transmit power of the PDSCH part of OCNG is equal between all the transmit antennas with CRS used in the test. The antenna transmission modes are specified in section 7.1 in 3GPP TS 36.213.

D.1.7 OCNG FDD pattern 7: full bandwidth allocation in 1.4 MHz (without MBSFN)

Table D.1.7-1: OP.7 FDD: OCNG FDD Pattern 7

Allocation	Re	PDSCH Data					
$n_{\it PRB}$		Subframe (Note 1)					
	0	5	4, 9	1 - 3, 6 - 8			
0 - 5	0	0	0	0	Note 2		

Note 1: PDSCH allocation applies only to subframes not configured as PRS subframes. Note 2: These physical resource blocks are assigned to an arbitrary number of virtual UEs with one PDSCH per virtual UE; the data transmitted over the OCNG PDSCHs shall be uncorrelated pseudo random data, which is QPSK modulated. The parameter γ_{PRB} is used to scale the power of PDSCH.

Note 3: If two or more transmit antennas with CRS are used in the test, the PDSCH part of OCNG shall be transmitted to the virtual users by all the transmit antennas with CRS and according to the antenna transmission mode 2. The parameter γ_{PRB} applies to each antenna port separately, so the transmit power of the PDSCH part of OCNG is equal between all the transmit antennas with CRS used in the test. The antenna transmission modes are specified in section 7.1 in 3GPP TS 36.213.

D.2 OCNG Patterns for TDD

The following OCNG patterns are used for modelling allocations to virtual UEs (which are not under test). The OCNG pattern for each sub frame specifies the allocations that shall be filled with OCNG, and furthermore, the relative power level of each such allocation.

The system information is scheduled in the allocations reserved for the OCNG patterns. For this purpose the number of the allocated RB-s in the OCNG patterns can be reduced as necessary.

In each test case the OCNG is expressed by parameters OCNG_RA and OCNG_RB which together with a relative power level (γ) specifies the PDSCH EPRE-to-RS EPRE ratios in OFDM symbols with and without reference symbols, respectively. The relative power, which is used for modelling boosting per virtual UE allocation, is expressed by:

$$\gamma_i = PDSCH_i RA/OCNG RA = PDSCH_i RB/OCNG RB,$$

where γ_i denotes the relative power level of the *i:th* virtual UE. The parameter settings of OCNG_RA, OCNG_RB, and the set of relative power levels γ are chosen such that when also taking allocations to the UE under test into account, as given by a PDSCH reference channel, a transmitted power spectral density that is constant on an OFDM symbol basis is targeted.

Moreover the OCNG pattern is accompanied by a PCFICH/PDCCH/PHICH reference channel which specifies the control region. For any aggregation and PHICH allocation, the PDCCH and any unused PHICH groups are padded with resource element groups with a power level given respectively by PDCCH_RA/RB and PHICH_RA/RB as specified in the test case such that a total power spectral density in the control region that is constant on an OFDM symbol basis is targeted.

D.2.1 OCNG TDD pattern 1: outer resource blocks allocation in 10 MHz

Table D.2.1-1: OP.1 TDD: OCNG TDD Pattern 1 for 5ms downlink-to-uplink switch-point periodicity

Allocation	Relative power level γ_{PRB} [db]							
$n_{\it PRB}$		Subframe	(Note 1))				
	0	5	3, 4, 8, 9 and 6 (as normal subframe) Note 3	1 and 6 (as special subframe)				
0 - 12	0	0	0	0	Note 2			
37 - 49	0	0	0	0	Note 2			

Note 1: PDSCH allocation applies only to subframes not configured as PRS subframes.

Note 2: These physical resource blocks are assigned to an arbitrary number of virtual UEs with one PDSCH per virtual UE; the data transmitted over the OCNG PDSCHs shall be uncorrelated pseudo random data, which is QPSK modulated. The parameter γ_{PRB} is used to scale the power of PDSCH.

Note 3: Subframes available for DL transmission depends on the Uplink-Downlink configuration defined in Table 4.2-2 in 3GPP TS 36.211 [9]. The control region consists of PCFICH, PHICH and PDCCH. Number of OFDM symbols belonging to the control region may vary between subframes.

Note 4: If two or more transmit antennas with CRS are used in the test, the OCNG shall be transmitted to the virtual users by all the transmit antennas with CRS and according to the antenna transmission mode 2. The parameter γ_{PRB} applies to each antenna port separately, so the transmit power is equal between all the transmit antennas with CRS used in the test. The antenna transmission modes are specified in section 7.1 in 3GPP TS 36.213.

D.2.2 OCNG TDD pattern 2: full bandwidth allocation in 10 MHz

Table D.2.2-1: OP.2 TDD: OCNG TDD Pattern 2 for 5ms downlink-to-uplink switch-point periodicity

Allocation		Relative power level γ_{PRB} [dB]						
$n_{\it PRB}$		Subframe (Note 1)						
	0	0 5 3, 4, 8, 9 and 6 (as normal subframe) special subframe) Note 3 subframe)						
0 - 49	0	0	0	0	Note 2			

- Note 1: PDSCH allocation applies only to subframes not configured as PRS subframes.
- Note 2: These physical resource blocks are assigned to an arbitrary number of virtual UEs with one PDSCH per virtual UE; the data transmitted over the OCNG PDSCHs shall be uncorrelated pseudo random data, which is QPSK modulated. The parameter γ_{PRB} is used to scale the power of PDSCH.
- Note 3: Subframes available for DL transmission depends on the Uplink-Downlink configuration in Table 4.2-2 in 3GPP TS 36.211[9]. The control region consists of PCFICH, PHICH and PDCCH. Number of OFDM symbols belonging to the control region may vary between subframes.
- Note 4: If two or more transmit antennas with CRS are used in the test, the OCNG shall be transmitted to the virtual users by all the transmit antennas with CRS and according to the antenna transmission mode
 2. The parameter γ_{PRB} applies to each antenna port separately, so the transmit power is equal between all the transmit antennas with CRS used in the test. The antenna transmission modes are specified in section 7.1 in 3GPP TS 36.213.

D.2.3 OCNG TDD pattern 3: outer resource blocks allocation in 1.4 MHz

Table D.2.3-1: OP.3 TDD: OCNG TDD Pattern 3 for 5 ms downlink-to-uplink switch-point periodicity

Allocation		Relative power level $\gamma_{\scriptscriptstyle PRB}$ [dB]					
$n_{\it PRB}$		Subframe (Note 1)					
	0	5	3 , 4, 8, 9 and 6 (as normal subframe)	1 and 6 (as special subframe)			
0 - 1	0	0	0	0	N O		
4 - 5	0	0	0	0	Note 2		

- Note 1: PDSCH allocation applies only to subframes not configured as PRS subframes.
- Note 2: These physical resource blocks are assigned to an arbitrary number of virtual UEs with one PDSCH per virtual UE; the data transmitted over the OCNG PDSCHs shall be uncorrelated pseudo random data, which is QPSK modulated. The parameter γ_{PRB} is used to scale the power of PDSCH.
- Note 3: Subframes available for DL transmission depends on the Uplink-Downlink configuration defined in Table 4.2-2 in 3GPP TS 36.211 [9].
- Note 4: If two or more transmit antennas with CRS are used in the test, the OCNG shall be transmitted to the virtual users by all the transmit antennas with CRS and according to the antenna transmission mode 2. The parameter γ_{PRB} applies to each antenna port separately, so the transmit power is equal between all the transmit antennas with CRS used in the test. The antenna transmission modes are specified in section 7.1 in 3GPP TS 36.213.

D.2.4 OCNG TDD pattern 4: full bandwidth allocation in 1.4 MHz

Table D.2.4-1: OP.4 TDD: OCNG TDD Pattern 4 for 5 ms downlink-to-uplink switch-point periodicity

Allocation		PDSCH Data			
$n_{\it PRB}$					
	0	5	3 , 4, 8, 9 and 6 (as normal subframe)	1 and 6 (as special subframe) Note 3	
0 - 5	0	0	0	0	Note 2

- Note 1: PDSCH allocation applies only to subframes not configured as PRS subframes.
- Note 2: These physical resource blocks are assigned to an arbitrary number of virtual UEs with one PDSCH per virtual UE; the data transmitted over the OCNG PDSCHs shall be uncorrelated pseudo random data, which is QPSK modulated. The parameter γ_{PRB} is used to scale the power of PDSCH.
- Note 3: Subframes available for DL transmission depends on the Uplink-Downlink configuration in Table 4.2-2 in 3GPP TS 36.211 [9].
- Note 4: If two or more transmit antennas with CRS are used in the test, the OCNG shall be transmitted to the virtual users by all the transmit antennas with CRS and according to the antenna transmission mode 2. The parameter γ_{PRB} applies to each antenna port separately, so the transmit power is equal between all the transmit antennas with CRS used in the test. The antenna transmission modes are specified in section 7.1 in 3GPP TS 36.213.

Annex E (normative): Cell configuration mapping

The cells used in TS 36.521-3 do not correspond to the cells defined in TS 36.508 [7] section 4.4.2. Table E-1 describes the mapping between cells described in TS 36.521-3 and those defined in TS 36.508 [7]. For each test case the cells as defined in TS 36.508 [7] section 4.4.2 are listed in one row. The test case shall apply the RF parameters as defined in TS 36.521-3 according to the column heading.

NOTE: For example if the second cell in a test case is an inter-frequency cell then Cell3 from TS 36.508 [7] section 4.4.2 is used with the radio parameters as defined for Cell2 in TS 36.521-3.

Table E-1: Cell configuration mapping for RRM testing

			36.521-3		
Test Case	Description	Cell1	Cell2		
4.2.1	RRC IDLE / E-UTRAN Cell Reselection / FDD - FDD cell re-				
	selection intra frequency case	Cell1	Cell11		
4.2.2	RRC IDLE / E-UTRAN Cell Reselection / TDD - TDD cell re-				
4.0.0	selection intra frequency case	Cell1	Cell11		
4.2.3	RRC IDLE / E-UTRAN Cell Reselection / FDD - FDD cell re-	0 110	0 1100		
4.2.4	selection inter frequency case	Cell6	Cell23		
4.2.4	RRC IDLE / E-UTRAN Cell Reselection / FDD - TDD cell re-	Call4	Callaa		
4.2.5	selection inter frequency case RRC IDLE / E-UTRAN Cell Reselection / TDD - FDD cell re-	Cell1	Cell23	<u> </u>	
4.2.3	selection inter frequency case	Cell23	Cell6		
4.2.6	RRC IDLE / E-UTRAN Cell Reselection / TDD - TDD cell re-	Celizo	Cello		
7.2.0	selection inter frequency case	Cell6	Cell23		
4.3.1.1	RRC IDLE / E-UTRAN to UTRAN Cell re-selection / E-UTRAN	00.10	COMEC		
	FDD - UTRAN FDD cell re-selection: UTRA is of higher priority	Cell3	Cell9		
4.3.1.2	RRC IDLE / E-UTRAN to UTRAN Cell re-selection / E-UTRAN				
	FDD - UTRAN FDD cell re-selection: UTRA is of lower priority	Cell3	Cell9		
4.3.1.3	RRC IDLE / E-UTRAN to UTRAN Cell re-selection / E-UTRAN				
	FDD - UTRAN FDD cell re-selection in fading propagation				
	conditions: UTRA FDD is of lower priority	Cell3	Cell9		
4.3.2	RRC IDLE / E-UTRAN to UTRAN Cell re-selection / E-UTRAN				
	FDD - UTRAN TDD cell re-selection	Cell1	Cell8		
4.3.3	RRC IDLE / E-UTRAN to UTRAN Cell re-selection / E-UTRAN				
	TDD - UTRAN FDD cell re-selection	Cell6	Cell8	<u> </u>	
4.3.4.1	RRC IDLE / E-UTRAN to UTRAN Cell re-selection / E-UTRAN	0 114	0 110		
4040	TDD - UTRAN TDD cell re-selection: UTRA is of higher priority	Cell1	Cell8	<u> </u>	
4.3.4.2	RRC IDLE / E-UTRAN to UTRAN Cell re-selection / E-UTRAN	Call4	Cell8		
4.3.4.3	TDD - UTRAN TDD cell re-selection: UTRA is of lower priority RRC IDLE / E-UTRAN to UTRAN Cell re-selection /EUTRA	Cell1	Cello	 	
4.3.4.3	TDD-UTRA TDD cell reselection in fading propagation				
	conditions: UTRA TDD is of lower priority	Cell3	Cell9		
4.4.1	RRC IDLE / E-UTRAN to GSM Cell re-selection / E-UTRAN	OGIIO	OGIIO		
	FDD - GSM cell re-selection	Cell1	Cell26		
4.4.2	RRC IDLE / E-UTRAN to GSM Cell re-selection / E-UTRAN		0020		
	TDD - GSM cell re-selection	Cell1	Cell26		
4.5.1.1	RRC IDLE / E-UTRAN to HRPD Cell re-selection / E-UTRAN				
	FDD - HRPD cell re-selection: HRPD is of lower priority	Cell1	[Cell15]		
4.6.1.1	RRC IDLE / E-UTRAN to cdma2000 1xRTT Cell re-selection /				
	E-UTRAN FDD - cdma2000 1xRTT cell re-selection:				
	cdma2000 1x is of lower priority	Cell1	[Cell19]		
5.1.1	RRC CONNECTED / E-UTRAN Handover / FDD - FDD / Intra				
	frequency case	Cell1 Cell2		<u> </u>	
5.1.2	RRC CONNECTED / E-UTRAN Handover / TDD - TDD / Intra	0-114	0-110		
F 4 2	frequency case	Cell1	Cell2		
5.1.3	RRC CONNECTED / E-UTRAN Handover / FDD - FDD / Inter	Cell6	Cell3		
5.1.4	frequency case RRC CONNECTED / E-UTRAN Handover / TDD - TDD / Inter	Cello	CEIIO	 	
J. 1.4	frequency case	Cell6	Cell3		
5.1.5	RRC CONNECTED / E-UTRAN Handover / FDD - FDD / Inter	30110	00110		
	frequency case: unknown target cell	Cell6	Cell3		
5.1.6	RRC CONNECTED / E-UTRAN Handover / TDD - TDD / Inter				
	frequency case: unknown target cell	Cell6	Cell3		
5.2.1	RRC CONNECTED / Handover from E-UTRAN to other RATs				
	/ From E-UTRAN to UTRAN / E-UTRAN FDD - UTRAN FDD				
	handover	Cell3	Cell9		
5.2.2	RRC CONNECTED / Handover from E-UTRAN to other RATs				
1	/ From E-UTRAN to UTRAN / E-UTRAN TDD - UTRAN FDD				
	handover	Cell6	Cell8		
5.2.3	RRC CONNECTED / Handover from E-UTRAN to other RATs				
<u></u>	/ From E-UTRAN to GSM / E-UTRAN FDD - GSM handover	Cell1	Cell26		
5.2.4	RRC CONNECTED / Handover from E-UTRAN to other RATS				
	/ From E-UTRAN to UTRAN / E-UTRAN TDD - UTRAN TDD	0-110	0-110		
F 2 F	handover	Cell3	Cell9		
5.2.5	RRC CONNECTED / Handover from E-UTRAN to other RATs	Cell1	Cell8		<u>J</u>

	/ From E-UTRAN to UTRAN / E-UTRAN FDD - UTRAN TDD			
	handover			
5.2.6	RRC CONNECTED / Handover from E-UTRAN to other RATs			
	/ From E-UTRAN to GSM / E-UTRA TDD - GSM handover	Cell1	Cell26	
5.2.7	RRC CONNECTED / Handover from E-UTRAN to other RATs			
	/ E-UTRAN FDD - UTRAN FDD handover: unknown target cell	Cell3	Cell9	
5.2.8	RRC CONNECTED / Handover from E-UTRAN to other RATs			
	/ E-UTRAN FDD - GSM handover: unknown target cell	Cell1	Cell26	
5.2.9	RRC CONNECTED / Handover from E-UTRAN to other RATs			
	/ E-UTRAN TDD - GSM Handover: unknown target cell	Cell1	Cell26	
5.2.10	RRC CONNECTED / Handover from E-UTRAN to other RATs			
	/ E-UTRAN TDD - UTRAN TDD HO test: unknown target cell	Cell1	Cell8	
5.3.1	RRC CONNECTED / Handover from E-UTRAN to non-3GPP			
	RATs / E-UTRAN FDD – HRPD handover	Cell1	[Cell15]	
5.3.2	RRC CONNECTED / Handover from E-UTRAN to non-3GPP			
	RATs / E-UTRAN FDD – cdma2000 1xRTT handover	Cell1	[Cell19]	
5.3.3	RRC CONNECTED / Handover from E-UTRAN to non-3GPP	0 114	10 11451	
F 2.4	RATs / E-UTRAN FDD – HRPD Handover: unknown target cell	Cell1	[Cell15]	
5.3.4	RRC CONNECTED / Handover from E-UTRAN to non-3GPP			
	RATs / E-UTRAN FDD - cdma2000 1xRTT Handover: unknown target cell	Cell1	[Cell19]	
6.1.1	RRC Connection Mobility Control / E-UTRAN FDD Intra-	Cell I	[Centa]	
0.1.1	frequency RRC Re-establishment	Cell1	Cell2	
6.1.2	RRC Connection Mobility Control / E-UTRAN FDD Inter-	30.11	JULE	
J	frequency RRC Re-establishment	Cell6	Cell3	
6.1.3	RRC Connection Mobility Control / E-UTRAN TDD Intra-			
	frequency RRC Re-establishment	Cell1	Cell2	
6.1.4	RRC Connection Mobility Control / E-UTRAN TDD Inter-			
	frequency RRC Re-establishment	Cell6	Cell3	
6.2.1	RRC Connection Mobility Control / Random Access / E-			
	UTRAN FDD - Contention Based Random Access	Cell1		
6.2.2	RRC Connection Mobility Control / Random Access / E-			
	UTRAN FDD - Non-Contention Based Random Access	Cell1		
6.2.3	RRC Connection Mobility Control / Random Access / E-			
	UTRAN TDD - Contention Based Random Access	Cell1		
6.2.4	RRC Connection Mobility Control / Random Access / E-			
7.4.4	UTRAN TDD - Non-Contention Based Random Access	Cell1		
7.1.1	E-UTRAN FDD-UE Transmit Timing Accuracy	Cell1		
7.1.2	E-UTRAN TDD-UE Transmit Timing Accuracy	Cell1		
7.2.1 7.2.2	E-UTRAN FDD-UE Timing Advance Adjustment Accuracy E-UTRAN TDD-UE Timing Advance Adjustment Accuracy	Cell1		
7.2.2	E-UTRAN TDD-0E Timing Advance Adjustment Accuracy E-UTRAN FDD Radio Link Monitoring Test for Out-of-sync	Cell1 Cell1		
7.3.1	E-UTRAN FDD Radio Link Monitoring Test for Un-sync	Cell1		
7.3.3	E-UTRAN TDD Radio Link Monitoring Test for Out-of-sync	Cell1		
7.3.4	E-UTRAN TDD Radio Link Monitoring Test for In-sync	Cell1		
7.3.5	E-UTRAN FDD Radio Link Monitoring Test for Out-of-sync in	Cell I		
1.0.0	DRX	Cell1		
7.3.6	E-UTRAN FDD Radio Link Monitoring Test for In-sync in DRX	Cell1		
7.3.7	E-UTRAN TDD Radio Link Monitoring Test for Out-of-sync in			
	DRX	Cell1		
7.3.8	E-UTRAN TDD Radio Link Monitoring Test for In-sync in DRX	Cell1		
8.1.1	UE Measurement Procedures / E-UTRAN FDD-FDD intra			
	frequency event triggered reporting under fading propagation			
	conditions in asynchronous cells	Cell1	Cell2	
8.1.2	UE Measurement Procedures / E-UTRAN FDD-FDD intra		Τ Τ	
	frequency event triggered reporting under fading propagation	0 11.		
0.4.0	conditions in synchronous cells	Cell1	Cell2	
8.1.3	UE Measurement Procedures / E-UTRAN FDD-FDD intra			
	frequency event triggered reporting under fading propagation	Calld	Callo	
0 1 4	conditions in synchronous cells with DRX	Cell1	Cell2	
8.1.4	Void	1		
8.2.1	UE Measurement Procedures / E-UTRAN TDD-TDD intra			
	frequency event triggered reporting under fading propagation	Cell1	Cell2	
8.2.2	conditions in synchronous cells UE Measurement Procedures / E-UTRAN TDD-TDD intra-	CEILI	UCIIZ	
0.2.2	frequency event triggered reporting under fading propagation			
	conditions in synchronous cells with DRX	Cell1	Cell2	
	1	1 2		

1004	LIEM (FUTDANEDD FDD:		1	T	
8.3.1	UE Measurement Procedures / E-UTRAN FDD-FDD inter frequency event triggered reporting under fading propagation				
	conditions in asynchronous cells	Cell6	Cell3		
8.3.2	UE Measurement Procedures / E-UTRAN FDD-FDD inter	Cello	Cello		
0.0.2	frequency event triggered reporting when DRX is used under				
	fading propagation conditions in asynchronous cells	Cell6	Cell3		
8.3.3	UE Measurement Procedures / E-UTRAN FDD-FDD inter				
	frequency event triggered reporting under AWGN propagation				
	conditions in asynchronous cells with DRX when L3 filtering is				
	used	Cell6	Cell3		
8.4.1	UE Measurement Procedures / E-UTRAN TDD-TDD inter-				
	frequency event triggered reporting under fading propagation conditions in synchronous cells	Cell6	Cell3		
8.4.2	UE Measurement Procedures / E-UTRAN TDD-TDD Inter-	Cello	Cello		
0.4.2	frequency event triggered reporting when DRX is used under				
	fading propagation conditions in synchronous cells	Cell6	Cell3		
8.4.3	E-UTRAN TDD-TDD inter-frequency event triggered reporting				
	under AWGN propagation conditions in synchronous cells with				
	DRX when L3 filtering is used	Cell6	Cell3		
8.5.1	UE Measurement Procedures / E-UTRAN FDD - UTRAN FDD				
0.5.0	event triggered reporting under fading propagation conditions	Cell3	Cell9		
8.5.2	UE Measurement Procedures / E-UTRAN FDD - UTRAN FDD				
	SON ANR cell search reporting under AWGN propagation conditions	Calla	Collo		
8.5.3	UE Measurement Procedures / E-UTRAN FDD - UTRAN FDD	Cell3	Cell9	1	
0.0.3	event triggered reporting when DRX is used under fading				
	propagation conditions	Cell3	Cell9		
8.6.1	UE Measurement Procedures / E-UTRAN TDD - UTRAN FDD	00.10	00.10		
	event triggered reporting under fading propagation conditions	Cell1	Cell8		
8.7.1	UE Measurement Procedures / E-UTRAN TDD - UTRAN TDD				
	event triggered reporting under fading propagation conditions	Cell1	Cell8		
8.7.2	UE Measurement Procedures / E-UTRAN TDD - UTRAN TDD				
	cell search when DRX is used under fading propagation				
	conditions	Cell1	Cell8		
8.7.3	E-UTRAN TDD - UTRAN TDD SON ANR cell search reporting	Calld	Callo		
8.8.1	under AWGN propagation conditions UE Measurement Procedures / E-UTRAN FDD - GSM event	Cell1	Cell8		
0.0.1	triggered reporting in AWGN	Cell6	Cell26		
8.8.2	UE Measurement Procedures / E-UTRAN FDD - GSM event	OCIIO	OCIIZO		
0.0.2	triggered reporting when DRX is used in AWGN	Cell6	Cell26		
8.9.1	UE Measurement Procedures / E-UTRAN FDD - UTRAN TDD				
	event triggered reporting under fading propagation conditions	Cell1 Cell8			
8.10.1	UE Measurement Procedures / E-UTRAN TDD - GSM event				
	triggered reporting in AWGN	Cell6	Cell26		
8.10.2	UE Measurement Procedures / E-UTRAN TDD - GSM event		L		
0.44.4	triggered reporting when DRX is used in AWGN	Cell6	Cell26	1	
8.11.1	UE Measurement Procedures / Monitoring of multiple layers /				
	E-UTRAN FDD - E-UTRAN FDD and E-UTRAN FDD Inter-				
	frequency event triggered reporting under fading propagation conditions	Cell1	Cell3	Cell6	
8.11.2	UE Measurement Procedures / Monitoring of multiple layers /	00111	CONO	CONO	
	E-UTRAN TDD - E-UTRAN TDD and E-UTRAN TDD Inter-				
	frequency event triggered reporting under fading propagation				
	conditions	Cell1	Cell3	Cell6	<u> </u>
8.11.3	UE Measurement Procedures / Monitoring of multiple layers /				
	InterRAT E-UTRA FDD to E-UTRA FDD and UTRA FDD cell		L		
0.44.5	search	Cell1	Cell6	Cell8	
8.11.4	UE Measurement Procedures / Monitoring of multiple layers /				
	InterRAT E-UTRA TDD to E-UTRA TDD and UTRA TDD cell	Colla	Colle	Cell8	
8.11.5	search Combined E-UTRAN FDD - E-UTRA FDD and GSM cell	Cell1	Cell6	Cello	+
0.11.0	search. E-UTRA cells in fading; GSM cell in static propagation				
	conditions	Cell1	Cell3	Cell24	
8.11.6	Combined E-UTRAN TDD - E-UTRA TDD and GSM cell	0011	00110	OUIL I	
	search. E-UTRA cells in fading; GSM cell in static propagation				
	conditions	Cell1	Cell3	Cell24	
9.1.1.1	Measurement Performance Requirements / E-UTRAN / FDD	Cell1	Cell2		

	Intra frequency RSRP Accuracy / Absolute			
9.1.1.2	Measurement Performance Requirements / E-UTRAN / FDD			
	Intra frequency RSRP Accuracy / Relative	Cell1	Cell2	
9.1.2.1	Measurement Performance Requirements / E-UTRAN / TDD			
	Intra Frequency RSRP Accuracy / Absolute	Cell1	Cell2	
9.1.2.2	Measurement Performance Requirements / E-UTRAN / TDD			
	Intra Frequency RSRP Accuracy / Relative	Cell1	Cell2	
9.1.3.1	Measurement Performance Requirements / E-UTRAN / FDD			
	Inter frequency RSRP Accuracy / Absolute	Cell6	Cell3	
9.1.3.2	Measurement Performance Requirements / E-UTRAN / FDD			
	Inter frequency RSRP Accuracy / Relative	Cell6	Cell3	
9.1.4.1	Measurement Performance Requirements / E-UTRAN / TDD			
	Inter Frequency RSRP Accuracy / Absolute	Cell6	Cell3	
9.1.4.2	Measurement Performance Requirements / E-UTRAN / TDD			
	Inter Frequency RSRP Accuracy / Relative	Cell6	Cell3	
9.2.1.1	Measurement Performance Requirements / E-UTRAN / FDD			
	Intra frequency RSRQ Accuracy / Absolute	Cell1	Cell2	
9.2.2.1	Measurement Performance Requirements / E-UTRAN / TDD			
	Intra Frequency RSRQ Accuracy / Absolute	Cell1	Cell2	
9.2.3.1	Measurement Performance Requirements / E-UTRAN / FDD			
	Inter frequency RSRQ Accuracy / Absolute	Cell6	Cell3	
9.2.3.2	Measurement Performance Requirements / E-UTRAN / FDD			
	Inter frequency RSRQ Accuracy / Relative	Cell6	Cell3	
9.2.4.1	Measurement Performance Requirements / E-UTRAN / TDD -			
	TDD Inter Frequency RSRQ Accuracy / Absolute	Cell6	Cell3	
9.2.4.2	Measurement Performance Requirements / E-UTRAN / TDD -			
	TDD Inter Frequency RSRQ Accuracy / Relative	Cell6	Cell3	
9.3.1	Measurement Performance Requirements / E-UTRAN FDD -			
	UTRA FDD CPICH RSCP absolute accuracy	Cell3	Cell9	
9.4.1	Measurement Performance Requirements / E- UTRAN FDD -			
	UTRA FDD CPICH Ec/No absolute accuracy	Cell3	Cell9	

Annex F:

Measurement uncertainties and Test Tolerances

Editor's note: Annex is incomplete. The following aspects are either missing or not yet determined:

- In Annex F.1 the Acceptable uncertainty of Test System has not yet been defined for all tests
- In Annex F.3 the Derivation of Test Requirements has not yet been defined for all test
- The references to other specifications need to be formalised

The requirements of this clause apply to all applicable tests in the present document.

F.1 Acceptable uncertainty of Test System (normative)

See TS 36.521-1[10] Annex F1.

F.1.1 Measurement of test environments

See TS 36.521-1[10] Annex F1.1.

F.1.2 Measurement of RRM requirements

Table F.1.2-1: Maximum Test System Uncertainty for RRM Requirements

Subclause	Maximum Test	Derivation of Test System Uncertainty
Cabolados	System Uncertainty ¹	John Chief College Chief
4.2.1 E-UTRA FDD - FDD cell re-selection	N _{oc} ±1.0 dB averaged	Note:
intra frequency	over BW _{Config}	Ês ₁ / N _{oc} is the ratio of cell 1 signal / AWGN
	$\hat{E}s_1 / N_{oc} \pm 0.3 dB$	Ês ₂ / N _{oc} is the ratio of cell 2 signal / AWGN
	averaged over BW _{Config}	
	Es ₂ / N _{oc} ±0.3 dB	
4.0.0 E HTDA TDD TDD III I I I	averaged over BW _{Config}	
4.2.2 E-UTRA TDD - TDD cell re-selection	Same as 4.2.1	
intra frequency 4.2.3 E-UTRA FDD - FDD cell re-selection	N _{oc1} ±0.7 dB averaged	Note:
inter frequency	over BW _{Config}	N _{oc1} is the AWGN on cell 1 frequency
inter requestoy	Ês ₁ / N _{oc1} ±0.3 dB	Ês ₁ / N _{oc1} is the ratio of cell 1 signal / AWGN
	averaged over BW _{Config}	N _{oc2} is the AWGN on cell 2 frequency
	N _{oc2} ±0.7 dB averaged	Ês ₂ / N _{oc2} is the ratio of cell 2 signal / AWGN
	over BW _{Config}	
	$\hat{E}s_2 / N_{oc2} \pm 0.3 dB$	
4.0.C.F. LITDA TDD. TDD cell re-colortion	averaged over BW _{Config}	
4.2.6 E-UTRA TDD - TDD cell re-selection	Same as 4.2.3	
inter frequency 4.3.1.1 E-UTRA FDD - UTRAN FDD cell	E-UTRA cell	Notes:
reselection: UTRA FDD is of higher priority	N _{oc} ±0.7 dB averaged	
june processing the second sec	over BW _{Config}	N _{oc} is the AWGN on cell 1 (E-UTRA)frequency
	$\hat{E}s / N_{oc} \pm 0.3 dB$	Ês / N _{oc} is the ratio of cell 1 signal / AWGN
	averaged over BW _{Config}	
		I _{oc} is the AWGN on cell 2 (UTRA) frequency
	UTRA cell	I _{or} / I _{oc} is the ratio of cell 2 signal / AWGN
	I _{oc} ±0.7 dB I _{or} / I _{oc} ±0.3 dB	CPICH E _c / I _{or} is the fraction of cell 2 power
	CPICH $E_c / I_{or} \pm 0.1 \text{ dB}$	assigned to the CPICH Physical channel
4.3.1.2 E-UTRAN FDD - UTRAN FDD cell	Same as 4.3.1.1	
re-selection: UTRA FDD is of lower priority	Came as norm	
4.3.2 E-UTRA FDD - UTRAN TDD cell re-	E-UTRA cell	Note:
selection	N _{oc} ±0.7 dB averaged	Noc is the AWGN on cell 1 frequency
	over BW _{Config}	Ês / N _{oc} is the ratio of cell 1 signal / AWGN
	Ês / N _{oc} ±0.3 dB	
	averaged over BW _{Config}	I _{oc} is the AWGN on cell 2 frequency Î _{or} / I _{oc} is the ratio of cell 2 signal / AWGN
	UTRA cell	PCCPCH E _c / I _{or} is the fraction of cell 2 power
	I _{oc} ±0.7 dB	assigned to the PCCPCH Physical channel
	$\hat{I}_{or} / I_{oc} \pm 0.3 dB$	DwPCH_Ec/lor is the fraction of cell 2 power
	PCCPCH Ec/lor ±0.1	assigned to the DwPCH channel
	dB	
10.40 5 1170 4 770 1170 1170 1170 1170 1170 117	DwPCH_Ec/lor ±0.1 dB	
4.3.4.2 E-UTRA TDD - UTRAN TDD cell re-	Same as 4.3.2	
selection : UTRA is of lower priority 4.4.1 E-UTRAN FDD - GSM cell re-	E-UTRA cell	Notes:
selection	N _{oc} ±0.7 dB averaged	Noc is the AWGN on cell 1 (E-UTRA)frequency
33.33.011	over BW _{Config}	Ês / N _{oc} is the ratio of cell 1 signal / AWGN
	Ês / N _{oc} ±0.3 dB	55 2 2 2 2 5 5 5 5 5 5 5 5 5 5 5 5 5 5
	averaged over BW _{Config}	
	GSM cell	0-110 (00M) has solved
	Signal level ±0.7 dB	Cell 2 (GSM) has only the wanted signal, without AWGN
4.4.2 E-UTRAN TDD - GSM cell re-	Same as 4.4.1	WILLIOUL AVVGIN
selection	Jame as 4.4.1	
5.1.1 E-UTRAN FDD-FDD Handover intra	N _{oc} ±1.0 dB averaged	Note:
frequency case	over BW _{Config}	Ês ₁ / N _{oc} is the ratio of cell 1 signal / AWGN
	Ês ₁ / N _{oc} ±0.3 dB	Ês ₂ / N _{oc} is the ratio of cell 2 signal / AWGN
	averaged over BW _{Config}	
	$\hat{E}s_2 / N_{oc} \pm 0.3 dB$	
	averaged over BW _{Config}	

	T	1
5.1.2 E-UTRAN TDD-TDD Handover intra frequency case	Same as 5.1.1	Same as 5.1.1
5.1.3 E-UTRAN FDD-FDD Handover inter	Same as 4.2.3	Same as 4.2.3
frequency case	Oame as 4.2.5	Same as 4.2.5
5.1.4 E-UTRAN TDD-TDD Handover inter	Same as 4.2.3	Same as 4.2.3
frequency case	Oame as 4.2.5	Same as 4.2.5
5.1.5 E-UTRAN FDD-FDD inter-frequency	Same as 4.2.3	Same as 4.2.3
Handover with unknown target cell	Oame as 4.2.5	Game as 4.2.0
5.1.6 E-UTRAN TDD-TDD inter-frequency	Same as 4.2.3	Same as 4.2.3
Handover with unknown target cell	Oame as 4.2.5	Game as 4.2.0
5.2.3 E-UTRAN FDD - GSM handover	E-UTRA Cell	Note:
5.2.5 E GTIVILLED GGIWTHANGOVCI	N _{oc} ±0.7 dB averaged over BW _{Config} Ês / N _{oc} ±0.3 dB averaged over BW _{Config}	N _{oc} is the AWGN on cell 1 frequency Ês / N _{oc} is the ratio of cell 1 signal / AWGN
	GSM cell Signal level ±0.7 dB	Cell 2 (GSM) has only the wanted signal, without AWGN
5.2.6 E-UTRA TDD - GSM handover	Same as 5.2.3	Same as 5.2.3
5.2.7 E-UTRAN FDD - UTRAN FDD	E-UTRA cell	Note:
handover: unknown target cell	N _{oc} ±0.7 dB averaged	
	over BW _{Config} Ês / N _{oc} ±0.3 dB averaged over BW _{Config}	N_{oc} is the AWGN on cell 1 frequency $\hat{E}s$ / N_{oc} is the ratio of cell 1 signal / AWGN
	UTRA cell loc ±0.7 dB lor/loc ±0.3 dB CPICH Ec/lor ±0.1 dB	loc is the AWGN on Cell 2 (UTRA) frequency lor/loc is the ratio of Cell 2 signal/AWGN CPICH Ec/lor is the fraction on Cell 2 power assigned to the CPICH physical channel
5.2.8 E-UTRAN FDD - GSM handover: unknown target cell	Same as 5.2.3	Same as 5.2.3
5.2.9 E-UTRAN TDD – GSM handover:	Same as 5.2.3	Same as 5.2.3
unknown target cell	E 1175 A 11	N
5.2.10 E-UTRAN TDD - UTRAN TDD HO	E-UTRA cell	Note:
test: unknown target cell	N _{oc} ±0.7 dB averaged over BW _{Config} Ês / N _{oc} ±0.3 dB averaged over BW _{Config}	N _{oc} is the AWGN on cell 1 frequency Ês / N _{oc} is the ratio of cell 1 signal / AWGN
	UTRA TDD cell I _{oc} ±0.7 dB Ior/loc ±0.3 dB PCCPCH_Ec /lor ±0.1 dB DwPCH_Ec /lor ±0.1 dB	loc is the AWGN on Cell 2 (UTRA TDD) frequency lor/loc is the ratio of Cell 2 signal/AWGN PCCPCH_Ec /lor is the fraction of Cell 2 power assigned to the PCCPCH physical channel DwPCH_Ec /lor is the fraction of Cell 2 power assigned to the DwPCH physical channel
6.1.1 E-UTRAN FDD Intra-frequency RRC	Same as 5.1.1	Same as 5.1.1
Re-establishment		
6.1.2 E-UTRAN FDD Inter-frequency RRC Re-establishment	N _{oc1} ±1.0 dB averaged over BW _{Config} Ês ₁ / N _{oc1} ±0.3 dB averaged over BW _{Config} N _{oc2} ±1.0 dB averaged over BW _{Config} Ês ₂ / N _{oc2} ±0.3 dB averaged over BW _{Config}	Note: N_{oc1} is the AWGN on cell 1 frequency $\hat{E}s_1 / N_{oc1}$ is the ratio of cell 1 signal / AWGN N_{oc2} is the AWGN on cell 2 frequency $\hat{E}s_2 / N_{oc2}$ is the ratio of cell 2 signal / AWGN

6.2.1 E-UTRAN FDD - Contention Based Random Access Test	Test 1 and Test 2: Noc ±0.7 dB averaged over BW _{Config} Ês / Noc ±0.3 dB averaged over BW _{Config} Uplink absolute power measurement ±0.7 dB Uplink relative power measurement ±0.7 dB	Note: $\hat{E}s_1 / N_{oc1}$ is the ratio of cell 1 signal / AWGN $T_S = 1/(15000 \times 2048)$ seconds, the basic timing unit defined in TS 36.211 [9]
	±3Ts Uplink signal transmit timing relative to downlink	
6.2.2 E-UTRAN FDD - Non Contention Based Random Access Test	Same as 6.2.1	Same as 6.2.1
6.2.3 E-UTRAN TDD - Contention Based Random Access Test	Same as 6.2.1	Same as 6.2.1
6.2.4 E-UTRAN TDD - Non Contention Based Random Access Test	Same as 6.2.1	Same as 6.2.1
7.1.1 E-UTRAN FDD - UE Transmit Timing Accuracy	N _{oc} ±3.0 dB averaged over BW _{Config} Ês / N _{oc} ±0.3 dB	Note: Ês / N _{oc} is the ratio of cell 1 signal / AWGN
	±3Ts Uplink signal transmit timing relative to downlink	$T_S = 1/(15000 \times 2048)$ seconds, the basic timing unit defined in TS 36.211 [9]
	±0.5Ts relative during UE timing adjustment	
7.1.2 E-UTRAN TDD - UE Transmit Timing Accuracy	Same as 7.1.1	Same as 7.1.1
7.2.1 E-ÚTRAN FDD - UE Timing Advance Adjustment Accuracy	N _{oc1} ±3.0 dB averaged over BW _{Config} Es ₁ / N _{oc1} ±0.3 dB	Note: Ês ₁ / N _{oc1} is the ratio of cell 1 signal / AWGN
	Timing Advance Adjustment: ±0.5T _s	The timing unit $T_S = 1/(15000 * 2048)$ seconds, as defined in TS.36.211 [9]
7.2.2 E-UTRAN TDD - UE Timing Advance Adjustment Accuracy	Same as 7.2.1	Same as 7.2.1

TO A FLITDANI TOO D. W. COLONIA	0.010 (0.1)	
	± 0.6dB (Subtest 1&2,	Subtests 1 & 2:
Test for Out-of-sync	AWGN conditions)	Overall system uncertainty for AWGN condition
	0.015 (0.14.40	comprises two quantities:
	± 0.8dB (Subtest 3,	1. Signal-to-noise ratio uncertainty
	Fading conditions,	2. Effect of AWGN flatness and signal flatness
	single antenna	1, 4, 10
	transmission)	Items 1 and 2 are assumed to be uncorrelated
	0.015 (0.1)	so can be root sum squared:
	± 0.9dB (Subtest 4,	AWGN flatness and signal flatness has x 0.25
	Fading conditions, two	effect on the required SNR, so use sensitivity
	antenna transmission)	factor of x 0.25 for the uncertainty contribution.
		Test System uncertainty = SQRT (Signal-to- noise ratio uncertainty ² + (0.25 x AWGN
		flatness and signal flatness) ²)
		Signal-to-noise ratio uncertainty ±0.3 dB
		AWGN flatness and signal flatness ±2.0 dB
		AWON hatriess and signal hatriess 12.0 db
		Subtests 3:
		Overall system uncertainty for fading condition
		comprises three quantities:
		Signal-to-noise ratio uncertainty
		Fading profile power uncertainty
		3. Effect of AWGN flatness and signal flatness
		Items 1, 2 and 3 are assumed to be
		uncorrelated so can be root sum squared:
		Test System uncertainty = SQRT (Average
		signal-to-noise ratio uncertainty 2 + Signal-to-
		noise ratio variation ² + Fading profile power
		uncertainty ²)
		Signal-to-noise ratio uncertainty ±0.3 dB
		Signal-to-noise ratio variation ±0.5 dB
		Fading profile power uncertainty ±0.5 dB for
		single Tx
		Subtest 4:
		Same calculations as for subtest 3 but with
		Fading profile uncertainty of ±0.7 for two Tx.
7.3.2 E-UTRAN FDD Radio Link Monitoring	± 0.8dB (Subtest 1,	Subtest 1:
Test for In-sync	Fading conditions,	See 7.3.1 subtest 3
	single antenna	
	transmission)	Subtest 2:
	0.0-10.70.17.10	See 7.3.1 subtest 4
	± 0.9dB (Subtest 2,	
	Fading conditions, two	
7.2.2 E LITDANI TOD Dealle Unit Mentile 1	antenna transmission)	Comp on 7.2.4
7.3.3 E-UTRAN TDD Radio Link Monitoring	Same as 7.3.1	Same as 7.3.1
Test for Out-of-sync 7.3.4 E-UTRAN TDD Radio Link Monitoring	Same as 7.3.2	Same as 7.3.2
Test for In-sync	Same as 1.3.2	Same as 1.3.2
7.3.5 E-UTRAN FDD Radio Link Monitoring	±0.9dB (Subtest 1,	Subtest 1:
	Fading conditions, two	See 7.3.1, subtest 4
Test for Out-of-sync in DRX	antenna transmission)	Jee 7.3.1, Sublest 4
	مارورانام بامارای الای الای	Subtest 2:
	± 0.6dB (Subtest 2,	See 7.3.1, subtest 1
	AWGN conditions)	Joe 7.3.1, Sublest 1
7.3.6 E-UTRAN FDD Radio Link Monitoring	± 0.6dB (AWGN	See 7.3.1, subtest 1
Test for In-sync in DRX	conditions)	000 7.0.1, Subtost 1
7.3.7 E-UTRAN TDD Radio Link Monitoring	±0.9dB (Subtest 1,	Subtest 1:
Test for Out-of-sync in DRX	Fading conditions, two	See 7.3.1, subtest 4
Took for Out of Syric III DICK	antenna transmission)	300 7.0.1, Subtost 4
	antonna transmission)	Subtest 2:
	± 0.6dB (Subtest 2,	See 7.3.1, subtest 1
	AWGN conditions)	
7.3.8 E-UTRAN TDD Radio Link Monitoring	± 0.6dB (AWGN	See 7.3.1, subtest 1
Test for In-sync in DRX	conditions)	355 7.5.1, 5451551
· · · · · · · · · · · · · · · ·	1	1

8.1.1 E-UTRAN FDD-FDD intra frequency event triggered reporting under fading propagation conditions in asynchronous cells	N _{oc} ±1.0 dB averaged over BW _{Config} Ês ₁ / N _{oc} ±0.6 dB averaged over BW _{Config} Ês ₂ / N _{oc} ±0.6 dB averaged over BW _{Config}	Note: $\hat{\mathbb{E}}s_1 / N_{oc}$ is the ratio of cell 1 signal / AWGN $\hat{\mathbb{E}}s_2 / N_{oc}$ is the ratio of cell 2 signal / AWGN $\hat{\mathbb{E}}s_2 / N_{oc}$ is the ratio of cell 2 signal / AWGN $\hat{\mathbb{E}}s_2 / N_{oc}$ uncertainty for fading condition comprises two quantities: 1. Signal-to-noise ratio uncertainty 2. Fading profile power uncertainty Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: $\hat{\mathbb{E}}s / N_{oc}$ uncertainty = SQRT (Signal-to-noise ratio uncertainty $^2 + Fading$ profile power uncertainty
8.1.2 E-UTRAN FDD-FDD intra frequency event triggered reporting under fading propagation conditions in synchronous cells	Same as 8.1.1	Same as 8.1.1
8.1.3 E-UTRAN FDD-FDD intra-frequency event triggered reporting under fading propagation conditions in synchronous cells with DRX	Same as 8.1.1	Same as 8.1.1
8.2.1 E-UTRAN TDD-TDD intra frequency event triggered reporting under fading propagation conditions in synchronous cells	Same as 8.1.1	Same as 8.1.1
8.2.2 E-UTRAN TDD-TDD intra-frequency event triggered reporting under fading propagation conditions in synchronous cells with DRX	Same as 8.1.1	Same as 8.1.1
8.3.1 E-UTRAN FDD-FDD Inter-frequency event triggered reporting under fading propagation conditions in asynchronous cells	Noc1 ±0.7 dB averaged over BW _{Config} Ês ₁ / N _{oc1} ±0.6 dB averaged over BW _{Config} N _{oc2} ±0.7 dB averaged over BW _{Config} Ês ₂ / N _{oc2} ±0.6 dB averaged over BW _{Config}	Note: Noc1 is the AWGN on cell 1 frequency Ês1 / Noc1 is the ratio of cell 1 signal / AWGN Noc2 is the AWGN on cell 2 frequency Ês2 / Noc2 is the ratio of cell 2 signal / AWGN Each Ês / Noc uncertainty for fading condition comprises two quantities: 1. Signal-to-noise ratio uncertainty 2. Fading profile power uncertainty Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: Ês / Noc uncertainty = SQRT (Signal-to-noise ratio uncertainty 2 + Fading profile power uncertainty 2) Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.5 dB
8.3.2 E-UTRAN FDD-FDD Inter-frequency event triggered reporting when DRX is used under fading propagation conditions in asynchronous cells	Same as 8.3.1	Same as 8.3.1
8.3.3 E-UTRAN FDD-FDD Inter frequency event triggered reporting under AWGN propagation conditions in asynchronous cells with DRX when L3 filtering is used	N_{oc1} ±0.7 dB averaged over BW _{Config} \hat{E}_{s_1} / N_{oc1} ±0.3 dB averaged over BW _{Config} N_{oc2} ±0.7 dB averaged over BW _{Config} \hat{E}_{s_2} / N_{oc2} ±0.3 dB averaged over BW _{Config}	Note: N_{oc1} is the AWGN on cell 1 frequency $\hat{E}s_1$ / N_{oc1} is the ratio of cell 1 signal / AWGN N_{oc2} is the AWGN on cell 2 frequency $\hat{E}s_2$ / N_{oc2} is the ratio of cell 2 signal / AWGN

659

		1
8.4.1 E-UTRAN TDD-TDD Inter-frequency event triggered reporting under fading propagation conditions in synchronous cells	N _{oc1} ±0.7 dB averaged over BW _{Config} Ês ₁ / N _{oc1} ±0.6 dB averaged over BW _{Config} N _{oc2} ±0.7 dB averaged over BW _{Config} Ês ₂ / N _{oc2} ±0.6 dB averaged over BW _{Config}	Note: Noc1 is the AWGN on cell 1 frequency Ês ₁ / Noc1 is the ratio of cell 1 signal / AWGN Noc2 is the AWGN on cell 2 frequency Ês ₂ / Noc2 is the ratio of cell 2 signal / AWGN Each Ês / Noc uncertainty for fading condition comprises two quantities: 1. Signal-to-noise ratio uncertainty 2. Fading profile power uncertainty Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: Ês / Noc uncertainty = SQRT (Signal-to-noise ratio uncertainty ² + Fading profile power uncertainty ²) Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.5 dB
8.4.2 E-UTRAN TDD-TDD Inter-frequency	Same as 8.4.1	Same as 8.4.1
event triggered reporting when DRX is used under fading propagation conditions in synchronous cells	dame as o.4.1	oumo as or. i
8.5.1 E-UTRAN FDD - UTRAN FDD event	E-UTRAN cell	Note:
triggered reporting under fading propagation conditions	N _{oc} ±0.7 dB averaged over BW _{Config} Ês / N _{oc} ±0.6 dB averaged over BW _{Config}	N _{oc} is the AWGN on Cell 1 frequency Ês / N _{oc} is the ratio of Cell 1 signal / AWGN
		Ês / N _{oc} uncertainty or I _{or} /I _{oc} uncertainty for fading condition comprises two quantities: 1. Signal-to-noise ratio uncertainty 2. Fading profile power uncertainty
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: Ês / Noc uncertainty = SQRT (Signal-to-noise ratio uncertainty ² + Fading profile power uncertainty ²) Signal-to-noise ratio uncertainty ±0.3 dB Fading profile power uncertainty ±0.5 dB
	UTRA cell $I_{oc} \pm 0.7$ dB $I_{or}/I_{oc} \pm 0.6$ dB CPICH Ec/lor ± 0.1 dB	loc is the AWGN on Cell 2 (UTRA) frequency lor/loc is the ratio of Cell 2 signal/AWGN CPICH Ec/lor is the fraction of Cell 2 power assigned to the CPICH physical channel
8.6.1 E-UTRAN TDD - UTRAN FDD event	Same as 8.5.1	Same as 8.5.1
triggered reporting under fading propagation conditions	3	555 30 01011

O Z 4 E LITDAN TOD LITDAN TOD event	E LIEDA coll	Notes
8.7.1 E-UTRAN TDD - UTRAN TDD event	E-UTRA cell	Notes:
triggered reporting under fading propagation conditions	N _{oc} ±0.7 dB averaged over BW _{Config} Ês / N _{oc} ±0.6 dB	N_{oc} is the AWGN on cell 1 (E-UTRA)frequency $\hat{E}s$ / N_{oc} is the ratio of cell 1 signal / AWGN
	averaged over BW _{Config}	Ês / N _{oc} uncertainty or I _{or} / I _{oc} uncertainty for fading condition comprises two quantities: 1. Signal-to-noise ratio uncertainty 2. Fading profile power uncertainty
		Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: $\hat{E}s / N_{oc}$ uncertainty or I_{or} / I_{oc} uncertainty = SQRT (Signal-to-noise ratio uncertainty 2 + Fading profile power uncertainty 2) Signal-to-noise ratio uncertainty ± 0.3 dB Fading profile power uncertainty ± 0.5 dB
	UTRA cell I _{oc} ±0.7 dB I _{or} /I _{oc} ±0.6 dB PCCPCH Ec/Ior ±0.1 dB DwPCH_Ec/Ior ±0.1 dB	I _{oc} is the AWGN on cell 2 (UTRA) frequency I _{or} / I _{oc} is the ratio of cell 2 signal / AWGN PCCPCH E _c / I _{or} is the fraction of cell 2 power assigned to the PCCPCH Physical channel DwPCH_Ec/Ior is the fraction of cell 2 power assigned to the DwPCH channel
8.7.2 E-UTRAN TDD - UTRAN TDD cell	Same as 8.7.1	Same as 8.7.1
search when DRX is used under fading		
propagation conditions		
8.8.1 E-UTRAN FDD - GSM event	E-UTRA Cell	Note:
triggered reporting in AWGN	N _{oc} ±0.7 dB averaged over BW _{Config} Ês / N _{oc} ±0.3 dB averaged over BW _{Config} GSM cell	N_{oc} is the AWGN on cell 1 frequency $\hat{E}s$ / N_{oc} is the ratio of cell 1 signal / AWGN
	Signal level ±0.7 dB	Cell 2 (GSM) has only the wanted signal, without AWGN
8.8.2 E-UTRAN FDD- GSM event triggered reporting when DRX is used in AWGN	E-UTRA Cell Noc ±0.7 dB averaged over BW _{Config} Ês / Noc ±0.3 dB averaged over BW _{Config}	Note: N_{oc} is the AWGN on cell 1 frequency $\hat{E}s$ / N_{oc} is the ratio of cell 1 signal / AWGN
	GSM cell Signal level ±0.7 dB	Cell 2 (GSM) has only the wanted signal, without AWGN
8.10.1 E-UTRAN TDD - GSM event triggered reporting in AWGN	Same as 8.8.1	Same as 8.8.1
8.10.2 E-UTRAN TDD- GSM event	Same as 8.8.2	Same as 8.8.2
triggered reporting when DRX is used in AWGN	Samo do 0.0.2	
[TBD]	[TBD]	[TBD]
9.1.1.1 FDD Intra Frequency Absolute RSRP Accuracy	$N_{\rm oc}$ ±0.7 dB averaged over BW _{Config} $N_{\rm oc}$ ±1.0 dB for PRBs #22-27 \hat{E}_{s_1} / $N_{\rm oc}$ and \hat{E}_{s_2} / $N_{\rm oc}$ each ±0.3 dB averaged	Note: $\hat{E}s_1 / N_{oc}$ is the ratio of cell 1 signal / AWGN $\hat{E}s_2 / N_{oc}$ is the ratio of cell 2 signal / AWGN
	over BW _{Config} Ês ₁ / N _{oc} and Ês ₂ / N _{oc} each ±0.8 dB for PRBs #22-27	

9.1.1.2 FDD Intra Frequency Relative Accuracy of RSRP	N_{oc} ±0.7 dB averaged over BW_{Config} N_{oc} ±1.0 dB for PRBs #22-27 $\hat{E}s_1$ / N_{oc} and $\hat{E}s_2$ / N_{oc} each ±0.3 dB averaged over BW_{Config} $\hat{E}s_1$ / N_{oc} and $\hat{E}s_2$ / N_{oc} each ±0.8 dB for PRBs	Note: $ \hat{E}s_1 / N_{oc} \text{ is the ratio of cell 1 signal / AWGN} $
9.1.2.1 TDD Intra Frequency Absolute	#22-27 Same as 9.1.1.1	Same as 9.1.1.1
RSRP Accuracy 9.1.2.2 TDD Intra Frequency Relative RSRP Accuracy	Same as 9.1.1.2	Same as 9.1.1.2
9.1.3.1 FDD Inter Frequency Absolute RSRP Accuracy	N_{oc1} and N_{oc2} each ± 0.7 dB averaged over BW _{Config} N_{oc1} and N_{oc2} each ± 1.0 dB for PRBs #22-27 $\hat{E}s_1$ / N_{oc1} and $\hat{E}s_2$ / N_{oc2} each ± 0.3 dB averaged over BW _{Config} $\hat{E}s_1$ / N_{oc1} and $\hat{E}s_2$ / N_{oc2} each ± 0.8 dB for PRBs #22-27	Note: N _{oc1} is the AWGN on cell 1 frequency Ês ₁ / N _{oc1} is the ratio of cell 1 signal / AWGN N _{oc2} is the AWGN on cell 2 frequency Ês ₂ / N _{oc2} is the ratio of cell 2 signal / AWGN
9.1.3.2 FDD Inter Frequency Relative RSRP Accuracy	N_{oc1} and N_{oc2} each ± 0.7 dB averaged over BW_{Config} N_{oc1} and N_{oc2} each ± 1.0 dB for PRBs $\#22-27$ $\hat{\mathbb{E}}_{s_1}$ / N_{oc1} and $\hat{\mathbb{E}}_{s_2}$ / N_{oc2} each ± 0.3 dB averaged over BW_{Config} $\hat{\mathbb{E}}_{s_1}$ / N_{oc1} and $\hat{\mathbb{E}}_{s_2}$ / N_{oc2} each ± 0.8 dB for PRBs $\#22-27$	Note: Noc1 is the AWGN on cell 1 frequency Ês1 / Noc1 is the ratio of cell 1 signal / AWGN Noc2 is the AWGN on cell 2 frequency Ês2 / Noc2 is the ratio of cell 2 signal / AWGN
9.1.4.1 TDD Inter Frequency Absolute RSRP Accuracy	Same as 9.1.3.1	Same as 9.1.3.1
9.1.4.2 TDD Inter Frequency Relative RSRP Accuracy	$\begin{array}{l} BW_{Config} \\ N_{oc1} \text{ and } N_{oc2} \text{ each } \pm 1.0 \\ dB \text{ for PRBs } \#22-27 \\ \hat{\mathbb{E}}s_1 \ / \ N_{oc1} \text{ and } \hat{\mathbb{E}}s_2 \ / \\ N_{oc2} \text{ each } \pm 0.3 \text{ dB} \\ averaged \text{ over } BW_{Config} \\ \hat{\mathbb{E}}s_1 \ / \ N_{oc1} \text{ and } \hat{\mathbb{E}}s_2 \ / \\ N_{oc2} \text{ each } \pm 0.8 \text{ dB for } \\ PRBs \ \#22-27 \end{array}$	N_{oc1} is the AWGN on cell 1 frequency $\hat{E}s_1$ / N_{oc1} is the ratio of cell 1 signal / AWGN N_{oc2} is the AWGN on cell 2 frequency $\hat{E}s_2$ / N_{oc2} is the ratio of cell 2 signal / AWGN
9.2.1.1 FDD Intra Frequency Absolute RSRQ Accuracy 9.2.2.1 TDD Intra Frequency Absolute	N_{oc} ±0.7 dB averaged over BW _{Config} N_{oc} ±1.0 dB for PRBs #22-27 $\hat{\mathbb{E}}_{s_1}$ / N_{oc} and $\hat{\mathbb{E}}_{s_2}$ / N_{oc} each ±0.3 dB averaged over BW _{Config} $\hat{\mathbb{E}}_{s_1}$ / N_{oc} and $\hat{\mathbb{E}}_{s_2}$ / N_{oc} each ±0.8 dB for PRBs #22-27	Note: Ês ₁ / N _{oc} is the ratio of cell 1 signal / AWGN Ês ₂ / N _{oc} is the ratio of cell 2 signal / AWGN Same as 9.2.1.1
RSRQ Accuracy	Jame as y.z. I. I	Jame as 3.2.1.1

I / AWGN I / AWGN
I / AWGN
A)frequency
AWGN
requency
WGN
2 power
annel
z, 13.5MHz,
2, 10.011112,
1
1
ated to
/ F

F.2 Interpretation of measurement results (normative)

See TS 36.521-1[10] Annex F2.

F.3 Test Tolerance and Derivation of Test Requirements (informative)

See TS 36.521-1[10] Annex F3.

F.3.1 Measurement of test environments

See TS 36.521-1[10] Annex F3.1.

F.3.2 Measurement of RRM requirements

Because the relationships between the Test system uncertainties and the Test Tolerances are often complex, it is not always possible to give a simple derivation of the Test Requirement in this document. The analysis is recorded in 3GPP TR 36 903 [20].

Table F.3.2-1: Derivation of Test Requirements (RRM tests)

Test	Minimum Requirement in TS 36.133	Test Tolerance (TT)	Test Requirement in TS 36.521-3
4.2.1 E-UTRA FDD - FDD	During T1:	During T1:	During T1:
cell re-selection intra	N _{oc} : -98dBm/15kHz	0dB	N _{oc} : -98dBm/15kHz
frequency	Ês ₁ / N _{oc} : +16.00dB	0dB	Ês ₁ / N _{oc} : +16.00dB
in oquonoy	Ês ₂ / N _{oc} : -infinity	0dB	Ês ₂ / N _{oc} : -infinity
	During T2:	During T2:	During T2:
	N _{oc} : -98dBm/15kHz	0dB	N _{oc} : -98dBm/15kHz
	Ês ₁ / N _{oc} : +13.00dB	0dB	Ês₁ / N₀c: +13.00dB
	Ês ₂ / N _{oc} : +16.00dB	+0.45dB	Ês ₂ / N _{oc} : +16.45dB
	During T3:	During T3: 0dB	During T3:
	N _{oc} : -98dBm /15kHz		N _{oc} : -98dBm /15kHz
	Ës ₁ / N _{oc} : +16.00dB	+0.45dB	Ēs ₁ / N _{oc} : +16.45dB
4005 HTD4 TDD TDD	Ës ₂ / N _{oc} : +13.00dB	0dB	Ës ₂ / N _{oc} : +13.00dB
4.2.2 E-UTRA TDD - TDD cell re-selection intra frequency	Same as 4.2.1	Same as 4.2.1	Same as 4.2.1
4.2.3 E-UTRA FDD - FDD	During T1:	During T1:	During T1:
cell re-selection inter	During T1: N _{oc1} : -98dBm/15kHz	During T1: -1.1dB	During T1: N _{oc1} : -99.1dBm/15kHz
frequency	Ês ₁ / N _{oc1} : +14.00dB	+1.9dB	Ês ₁ / N _{oc1} : +15.90dB
lirequericy	N _{0c2} : -98dBm/15kHz	-1.1dB	N _{oc2} : -99.1dBm/15kHz
	Ês ₂ / N _{oc2} : -4.00dB	+0.3dB	Ês ₂ / N _{oc2} : -3.70dB
	ES2 / Noc24.000B	+0.3ub	ES2 / N _{0C} 23. / OUB
	During T2:	During T2:	During T2:
	N _{oc1} : -98dBm/15kHz	-1.1dB	N _{oc1} : -99.1dBm/15kHz
	Ês ₁ / N _{oc1} : +14.00dB	+1.9dB	Ês ₁ / N _{oc1} : +15.90dB
	N _{oc2} : -98dBm/15kHz	-1.1dB	N _{oc2} : -99.1dBm/15kHz
	Ês ₂ / N _{oc2} : -infinity	0dB	Ês ₂ / N _{oc2} : -infinity
	During T3:	During T3:	During T3:
	N _{oc1} : -98dBm /15kHz	-1.1dB	N _{oc1} : -99.1dBm /15kHz
	Ês ₁ / N _{oc1} : +14.00dB	+1.9dB	Ês ₁ / N _{oc1} : +15.90dB
	N _{oc2} : -98dBm/15kHz	-1.1dB	N _{oc2} : -99.1dBm/15kHz
	Ês ₂ / N _{oc2} : +12.00dB	+1.9dB	Ês ₂ / N _{oc2} : +13.90dB
4.2.6 E-UTRA TDD - TDD cell re-selection inter	Same as 4.2.3	Same as 4.2.3	Same as 4.2.3
frequency	Duning at TA	Danis a T4	Design at T4:
4.3.1.1 E-UTRA FDD -	During T1:	During T1:	During T1:
UTRAN FDD cell	E-UTRA Cell 1	040	E-UTRA Cell 1
reselection: UTRA FDD is of	N _{oc} : -98.00dBm/15kHz	0dB	N _{oc} : -98.00dBm/15kHz
higher priority	Ês / N _{oc} : +14.00dB	+0.8dB	Ês / N₀c: +14.80dB UTRA Cell 2
	UTRA Cell 2 I _{oc} : -70.00dBm/3.84MHz	-0.1dB	I _{oc} : -70.10dBm/3.84MHz
	I _{or} / I _{oc} : -∞dB	OdB	I _{or} / I _{oc} : -∞dB
	CPICH_E ₀ /I _{or} : -10.00dB	0dB 0dB	CPICH_ E _c /I _{or} : -10.00dB
	During T2:	During T2:	During T2:
	E-UTRA Cell 1	During 12.	E-UTRA Cell 1
	N _{oc} : -98.00dBm/15kHz	0dB	N _{oc} : -98.00dBm/15kHz
	Ês / N _{oc} : +14.00dB	+0.8dB	Ês / N _{oc} : +14.80dB
	UTRA Cell 2	. 0.005	UTRA Cell 2
	I _{oc} : -70.00dBm/3.84MHz	-0.1dB	I _{oc} : -70.10dBm/3.84MHz
	I _{or} / I _{oc} : +11.00dB	+0.9dB	I _{or} / I _{oc} : +11.90dB
	CPICH_E _c /I _{or} : -10.00dB	0dB	CPICH_ E _o /I _{or} : -10.00dB
	During T3:	During T3:	During T3:
	E-UTRA Cell 1		E-UTRA Cell 1
	N _{oc} : -98.00dBm/15kHz	0dB	N _{oc} : -98.00dBm/15kHz
	Ês / N _{oc} : +14.00dB	+0.8dB	Ês / N _{oc} : +14.80dB
	UTRA Cell 2	0.4.15	UTRA Cell 2
	I _{oc} : -70.00dBm/3.84MHz	-0.1dB	I _{oc} : -70.10dBm/3.84MHz
	I _{or} / I _{oc} : -5.00dB	-0.7dB	l _{or} / l _{oc} : -5.70dB
	CPICH_E _c /I _{or} : -10.00dB	0dB	CPICH_ E _o /I _{or} : -10.00dB

40405 HTDAN 500	In : #4	D : T4	D : T4
4.3.1.2 E-UTRAN FDD -	During T1:	During T1:	During T1:
UTRAN FDD cell re-	E-UTRA Cell 1		E-UTRA Cell 1
selection: UTRA FDD is of	N _{oc} : -98.00dBm/15kHz	-1.10dB	N _{oc} : -99.10dBm/15kHz
lower priority	Ës / N _{oc} : +12.00dB	+1.90dB	Ës / N _{oc} : +13.90dB
	UTRA Cell 2		UTRA Cell 2
	I _{oc} : -70.00dBm/3.84MHz	0dB	I _{oc} : -70.00dBm/3.84MHz
	I _{or} / I _{oc} : +13.00dB	+0.80dB	I _{or} / I _{oc} : +13.80dB
	CPICH_E ₀ /I _{or} : -10.00dB	0dB	CPICH_ E _o /I _{or} : -10.00dB
	Total	ous	Or 10.11_ 20.10 . 10.0002
	During T2:	During T2:	During T2:
	E-UTRA Cell 1		E-UTRA Cell 1
	N _{oc} : -98.00dBm/15kHz	-1.10dB	N _{oc} : -99.10dBm/15kHz
	Ês / N _{oc} : -4.00dB	+0.30dB	Ês / N _{oc} : -3.70dB
	UTRA Cell 2		UTRA Cell 2
	I _{oc} : -70.00dBm/3.84MHz	0dB	I _{oc} : -70.00dBm/3.84MHz
	I _{or} / I _{oc} : +13.00dB	+0.80dB	I _{or} / I _{oc} : +13.80dB
	CPICH_E ₀ /I _{or} : -10.00dB	0dB	CPICH_ E ₀ /I _{or} : -10.00dB
4 2 2 E LITRA EDD			
4.3.2 E-UTRA FDD -	During T1:	During T1:	During T1: E-UTRA Cell 1
UTRAN TDD cell re-	E-UTRA Cell 1	0.10	
selection	N _{oc} : -98.0dBm/15kHz	0dB	N _{oc} : -98.0dBm/15kHz
	Ês / N _{oc} : +11.00dB	0dB	Ês / N _{oc} : +11.00dB
	UTRA Cell 2		UTRA Cell 2
	I _{oc} : -80.0dBm/1.28MHz	0dB	I _{oc} : -80.0dBm/1.28MHz
	Î _{or} / I _{oc} : +11.0dB	0dB	Î _{or} / I _{oc} : +11.0dB
	PCCPCH_E _c /I _{or} : -3dB	0dB	PCCPCH_E ₀ /I _{or} : -3dB
	DwPCH_Ec/lor: 0dB	0dB	DwPCH_Ec/lor: 0dB
	During T2:	During T2:	During T2:
	E-UTRA Cell 1		E-UTRA Cell 1
	N _{oc} : -98.0dBm/15kHz	0dB	N _{oc} : -98.0dBm/15kHz
	Ês / N _{oc} : -3.0dB	0dB	Ês / N _{oc} : -3.0dB
	UTRA Cell 2		UTRA Cell 2
	I _{oc} : -80.0dBm/1.28MHz	0dB	I _{oc} : -80.0dBm/1.28MHz
	Î _{or} / I _{oc} : +11.0dB	0dB	Î _{or} / I _{oc} : +11.0dB
	PCCPCH_E _o /I _{or} : -3dB	0dB	PCCPCH_E ₀ /I _{or} : -3dB
	DwPCH_Ec/lor: 0dB	0dB	DwPCH_Ec/lor: 0dB
4.3.4.2 E-UTRA TDD -	Same as 4.3.2	Same as	Same as 4.3.2
UTRAN TDD cell re-	Came as 4.5.2	4.3.2	Jame as 4.5.2
selection : UTRA is of lower		7.5.2	
priority			
4.4.1 E-UTRAN FDD - GSM	During T1:	During T1:	During T1:
cell re-selection	E-UTRA Cell 1		E-UTRA Cell 1
00.10 00.000.011	N _{oc} : -98.00dBm/15kHz	-1.1dB	N _{oc} : -99.10dBm/15kHz
	Ês / N _{oc} : +9.00dB	+0.9dB	Ês / N _{oc} : +9.90dB
	GSM Cell 2	TU.SUD	GSM Cell 2
	Signal level: -90.00dBm	OdB	
	Signal level90.000bm	0dB	Signal level: -90.00dBm
	During T2:	During T2:	During T2:
	E-UTRA Cell 1	_ g ,	E-UTRA Cell 1
	N _{oc} : -98.00dBm/15kHz	-1.1dB	N _{oc} : -99.10dBm/15kHz
	Ês / N _{oc} : -4.00dB	+0.3dB	Ês / N _{oc} : -3.70dB
	GSM Cell 2	10.000	GSM Cell 2
	Signal level: -75.0dBm	0dB	Signal level: -75.00dBm
4.4.2 E-UTRAN TDD - GSM	Same as 4.4.1	Same as	Same as 4.4.1
cell re-selection	Came as 4.4.1	4.4.1	Jame as 4.4.1
CEIL IE-SCIECTION		 -1	

5.1.1 E-UTRAN FDD-FDD	During T1:	During T1:	During T1:
Handover intra frequency	N _{oc} : -98dBm/15kHz	0dB	N _{oc} : -98dBm/15kHz
case	Ês₁ / N₀c: +8.00dB	0dB	Ês ₁ / N _{oc} : +8.00dB
	Ês ₂ / N _{oc} : -infinity	0dB	Ês ₂ / N _{oc} : -infinity
	•		,
	During T2:	During T2:	During T2:
	N _{oc} : -98dBm/15kHz	0dB	N _{oc} : -98dBm/15kHz
	Ês ₁ / N _{oc} : +8.00dB	0dB	Ês ₁ / N _{oc} : +8.00dB
	Ês ₂ / N _{oc} : +11.00dB	+0.5dB	Ês ₂ / N _{oc} : +11.50dB
	232 / 140C. 111.00dB	10.0dB	L327 1406. 111.500D
	During T3:	During T3:	During T3:
	N _{oc} : -98dBm /15kHz	0dB	N _{oc} : -98dBm /15kHz
	Ês ₁ / N _{oc} : +8.00dB	0dB	Ês ₁ / N _{oc} : +8.00
	Ês ₂ / N _{oc} : +11.00dB	+0.5dB	Ês ₂ / N _{oc} : +11.50dB
E 4 2 E LITDAN TOD TOD			
5.1.2 E-UTRAN TDD-TDD	Same as 5.1.1	Same as	Same as 5.1.1
Handover intra frequency		5.1.1	
case	_		<u> </u>
5.1.3 E-UTRAN FDD-FDD	During T1:	During T1:	During T1:
Handover inter frequency	N _{oc1} : -98dBm/15kHz	0dB	N _{oc1} : -98dBm/15kHz
case	Es ₁ / N _{oc1} : +4dB	0dB	Ës ₁ / N _{oc1} : +4dB
	N _{oc2} : -98dBm/15kHz	0dB	N _{oc2} : -98dBm/15kHz
	Ës ₂ / N _{oc2} : -infinity		Ês ₂ / N _{oc2} : -infinity
	During T2:	During T2:	During T2:
	N _{oc1} : -98dBm/15kHz	0dB	N _{oc1} : -98dBm/15kHz
	Ês ₁ / N _{oc1} : +4dB	0dB	Ês ₁ / N _{oc1} : +4dB
	N _{oc2} : -98dBm/15kHz	0dB	N _{oc2} : -98dBm/15kHz
	Ês ₂ / N _{oc2} : +7.0dB	0.1dB	Ês ₂ / N _{oc2} : +7.10dB
	202711002. 17.002	0.142	2027 11002. 17.1002
	During T3:	During T3:	During T3:
	N _{oc1} : -98dBm /15kHz	0dB	N _{oc1} : -98dBm /15kHz
	Ês ₁ / N _{oc1} : +4dB	0dB	Ês ₁ / N _{oc1} : +4dB
	N _{oc2} : -98dBm/15kHz	0dB	N _{oc2} : -98dBm/15kHz
	Ês ₂ / N _{oc2} : +7.0dB	+0.1dB	•
5.1.4 E-UTRAN TDD-TDD	Same as 5.1.3	Same as	Ës ₂ / N _{oc2} : +7.10dB Same as 5.1.3
	Same as 5.1.5		Same as 5.1.5
Handover inter frequency		5.1.3	
case	_		<u> </u>
5.1.5 E-UTRAN FDD-FDD	During T1:	During T1:	During T1:
inter-frequency Handover	Noc1: -98dBm/15kHz	0dB	Noc1: -98dBm/15kHz
with unknown target cell	Ës1 / Noc1: +4dB	0dB	Ês1 / Noc1: +4dB
	Noc2: -98dBm/15kHz	0dB	Noc2: -98dBm/15kHz
	Ês2 / Noc2: -infinity		Ës2 / Noc2: -infinity
	During T2:	During T2:	During T2:
	Noc1: -98dBm/15kHz	0dB	Noc1: -98dBm/15kHz
	Ês1 / Noc1: +4dB	0dB	Ês1 / Noc1: +4dB
	Noc2: -98dBm/15kHz	0dB	Noc2: -98dBm/15kHz
	Ês2 / Noc2: +7.0dB	0dB	Ês2 / Noc2: +7.0dB
5.1.6 E-UTRAN TDD-TDD	During T1:	During T1:	During T1:
inter-frequency Handover	Noc1: -98dBm/15kHz	0dB	Noc1: -98dBm/15kHz
with unknown target cell	Ês1 / Noc1: +4dB	0dB	Ês1 / Noc1: +4dB
dinato ini targot don	Noc2: -98dBm/15kHz	0dB	Noc2: -98dBm/15kHz
	Ês2 / Noc2: -infinity	000	Ês2 / Noc2: -infinity
			ESZ / NOSZIIIIIIILY
	During T2:	During T2:	During T2:
	Noc1: -98dBm/15kHz		
		0dB	Noc1: -98dBm/15kHz
	Ês1 / Noc1: +4dB	0dB	Ës1 / Noc1: +4dB
	Noc2: -98dBm/15kHz	0dB	Noc2: -98dBm/15kHz
	Ês2 / Noc2: +5.0dB	0dB	Ês2 / Noc2: +5.0dB

5.2.3 E-UTRAN FDD - GSM	During T1:	During T1:	During T1:
handover	E-UTRA Cell 1		E-UTRAN Cell 1
	N _{oc} : -98dBm/15kHz	0dB	N _{oc} : -98dBm/15kHz
	Ês / N _{oc} : +4dB	0dB	Ês / N _{oc} : +4dB
		OUD	
	GSM Cell 2		GSM Cell 2
	Signal level: -85dBm	0dB	Signal level: -85dBm
	During T2:	During T2:	During T2:
	E-UTRA Cell 1		E-UTRA Cell 1
	N _{oc} : -98dBm/15kHz	0dB	N _{oc} : -98dBm/15kHz
	Ês / N _{oc} : +4dB	0dB	Ës / N _{oc} : +4dB
	GSM Cell 2		GSM Cell 2
	Signal level: -75dBm	0dB	Signal level: -75dBm
	During T3:	During T3:	During T3:
	E-UTRA Cell 1		E-UTRA Cell 1
	N _{oc} : -98dBm /15kHz	0dB	N _{oc} : -98dBm /15kHz
	Ês / N _{oc} : +4dB	0dB	Ês / N _{oc} : +4dB
	GSM Cell 2		GSM Cell 2
	Signal level: -75dBm	0dB	Signal level: -75dBm
5.2.6 E-UTRA TDD - GSM	Same as 5.2.3	Same as	Same as 5.2.3
handover		5.2.3	
5.2.7 E-UTRAN FDD -	During T1:	During T1:	During T1:
		During 11.	
UTRAN FDD handover:	E-UTRA Cell 1		E-UTRA Cell 1
unknown target cell	Noc: -98dBm/15kHz	0dB	Noc: -98dBm/15kHz
	Ês / Noc: 0dB	0dB	Ês / Noc: 0dB
	UTRA Cell 2		UTRA Cell 2
	loc: -70dBm/3.84MHz	0dB	loc: -70dBm/3.84MHz
		OGD	
	lor / loc: -infinity		lor / loc: -infinity
	During T2:	During T2:	During T2:
	E-UTRA Cell 1	Duning 12.	E-UTRA Cell 1
		0.15	
	Noc: -98dBm/15kHz	0dB	Noc: -98dBm/15kHz
	Ês / Noc: 0dB	0dB	Ës / Noc: 0dB
	UTRA Cell 2		UTRA Cell 2
	loc: -70dBm/3.84MHz	0dB	loc: -70dBm/3.84MHz
	lor / loc: -1.8 dB	0dB	lor / loc: -1.8dB
5.2.8 E-UTRAN FDD - GSM			
	During T1:	During T1:	During T1:
handover: unknown target	E-UTRA Cell 1		E-UTRA Cell 1
cell	Noc: -98dBm/15kHz	0dB	Noc: -98dBm/15kHz
	Ês / Noc: +4dB	0dB	Ês / Noc: +4dB
	GSM Cell 2		GSM Cell 2
	Signal level: -infinity		Signal level: -infinity
	Orginal levelIllillilly		Orginal levelIllilling
	During T2:	During T2:	During T2:
	E-UTRA Cell 1		E-UTRA Cell 1
	Noc: -98dBm/15kHz	0dB	Noc: -98dBm/15kHz
	Ês / Noc: +4dB	0dB	Ês / Noc: +4dB
		OUD	
	GSM Cell 2	. ID	GSM Cell 2
	Signal level: -75 dBm	0dB	Signal level: -75 dBm
5.2.9 E-UTRAN TDD – GSM	Same as 5.2.8	Same as	Same as 5.2.8
handover: unknown target		5.2.8	
cell			
<u> · · </u>	+		ļ

	To . —.	T	To
5.2.10 E-UTRAN TDD -	During T1:	During T1:	During T1:
UTRAN TDD HO test:	E-UTRA Cell 1		E-UTRA Cell 1
unknown target cell	Noc: -98dBm/15kHz	0dB	Noc: -98dBm/15kHz
	Ês / Noc: 3dB	0dB	Ês / Noc: 3dB
	UTRA Cell 2		UTRA Cell 2
	loc: -80dBm/1.28MHz	0dB	loc: -80dBm/1.28MHz
	lor / loc: -infinity	1005	lor / loc: -infinity
	101 / 100IIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIII		ioi / iooiniiinty
	During T2:	During T2:	During T2:
	E-UTRA Cell 1	g	E-UTRA Cell 1
	Noc: -98dBm/15kHz	0dB	Noc: -98dBm/15kHz
	Ês / Noc: 3dB	0dB 0dB	Ês / Noc: 3dB
	UTRA Cell 2	Jour	UTRA Cell 2
		04B	
	loc: -80dBm/1.28MHz	0dB	loc: -80dBm/1.28MHz
	lor / loc: 13 dB	0dB	lor / loc: 13 dB
	PCCPCH_E _o /I _{or} : -3.00dB	0dB	PCCPCH_E _o /I _{or} : -3.00dB
	DwPCH_E _o /I _{or} : 0dB	0dB	DwPCH_E ₀ /I _{or} : 0dB
6.1.1 E-UTRAN FDD Intra-	During T1:	During T1:	During T1:
frequency RRC Re-	N _{oc} : -98dBm/15kHz	0dB	N _{oc} : -98dBm/15kHz
establishment	Ês ₁ / N _{oc} : +7.00dB	0dB	Ês ₁ / N _{oc} : +7.00dB
	Ês ₂ / N _{oc} : +4.00dB	0dB	Ês ₂ / N _{oc} : +4.00dB
	During T2:	During T2:	During T2:
	N _{oc} : -98dBm/15kHz	0dB	N _{oc} : -98dBm/15kHz
	Ês ₁ / N _{oc} : -infinity	0dB	Ês ₁ / N _{oc} : -infinity
	Ês ₂ / N _{oc} : +4.00dB	0dB	Ês ₂ / N _{oc} : +4.00dB
	-2.1.00		-2.1.00
	During T3:	During T3:	During T3:
	N _{oc} : -98dBm /15kHz	0dB	N _{oc} : -98dBm /15kHz
	Ês ₁ / N _{oc} : -infinity	0dB	Ês ₁ / N _{oc} : -infinity
	Ês ₂ / N _{oc} : +4.00dB	0dB	Ês ₂ / N _{oc} : +4.00dB
6.1.2 E-UTRAN FDD Inter-	During T1:	During T1:	During T1:
frequency RRC Re-	N _{oc1} : -98dBm/15kHz	0dB	N_{oc1} : -98dBm/15kHz
establishment	•	0dB	^
estabilistilletti	Es ₁ / N _{oc1} : +4.00dB		Es ₁ / N _{oc1} : +4.00dB
	N _{oc2} : -98dBm/15kHz	0dB	N _{oc2} : -98dBm/15kHz
	Ës₂ / N _{oc2} : -infinity	0dB	Ës ₂ / N _{oc2} : -infinity
	During T2:	During T2:	During T2:
	N _{oc1} : -98dBm/15kHz	OdB	N_{oc1} : -98dBm/15kHz
	Ês ₁ / N _{oc1} : -infinity	0dB	Es ₁ / N _{oc1} : -infinity
	N _{oc2} : -98dBm/15kHz	0dB	N _{oc2} : -98dBm/15kHz
	Ës ₂ / N _{oc2} : -infinity	0dB	Ës₂ / N _{oc2} : -infinity
	During T3:	During To	During T3:
		During T3:	During T3:
	N _{oc1} : -98dBm /15kHz	0dB	N _{oc1} : -98dBm /15kHz
	Ês ₁ / N _{oc1} : -infinity	0dB	Ês ₁ / N _{oc1} : -infinity
	N _{oc2} : -98dBm/15kHz	0dB	N _{oc2} : -98dBm/15kHz
	Ês ₂ / N _{oc2} : +7.00dB	0dB	Ës ₂ / N _{oc2} : +7.00dB
6.2.1 E-UTRAN FDD -	Test 1 and Test 2		Test 1 and Test 2
Contention Based Random	Absolute uplink power:		Absolute uplink power:
Access Test	Normal conditions ±9dB	1.1dB	Normal conditions ±10.1dB
	Extreme conditions ±12dB	1.1dB	Extreme conditions ±13.1dB
	Relative uplink power step:		Relative uplink power step:
	Normal conditions ±3dB	0.7dB	Normal conditions ±3.7dB
	Extreme conditions ±5dB	0.7dB	Extreme conditions ±5.7dB
	I Indicate time in - T - ACT	эт	United Airesia a T + 45T
6 2 2 E LITDAN EDD. Nov.	Uplink timing T _e : ±12T _s	3T _s	Uplink timing T _e : ±15T _s
6.2.2 E-UTRAN FDD - Non	Same as 6.2.1	Same as	Same as 6.2.1
Contention Based Random		6.2.1	
Access Test 6.2.3 E-UTRAN TDD -	Comp on 6.2.1	Some on	Sama aa 6 2 1
	Same as 6.2.1	Same as	Same as 6.2.1
Contention Based Random		6.2.1	
Access Test	0	0	0
6.2.4 E-UTRAN TDD - Non	Same as 6.2.1	Same as	Same as 6.2.1
Contention Based Random		6.2.1	
Access Test			

Test 1 (10MHz Ch BW): Uplink timing: ±12Ts	F . I T D A N : : : -	T		T + 4 (40MH OL FILE)
Max step size T _i ; 2T _s Min adjust rate: 7T _s Max adjust rate: 2T _s E _S / N _{oc} : +3.00dB				
Min adjust rate: 2Ts 0.5Ts 0.5Ts Max adjust rate: 25Ts €s / N₀c: +3.00dB Test 2 (10MHz Ch BW): Uplink timing: ±12Ts ±3Ts Uplink timing: ±15Ts €s / N₀c: +3.00dB Test 3: (1.4MHz Ch BW) Uplink timing: ±24Ts ±3Ts Uplink timing: ±15Ts €s / N₀c: +3.00dB Test 3: (1.4MHz Ch BW) Uplink timing: ±24Ts 0.5Ts Max step size Tsi, 16Ts 0.5Ts Max adjust rate: 16Ts 0.5Ts Max step size Tsi, 12Ts 0.5Ts Max adjust rate: 16Ts 0.5Ts Max step size Tsi, 12Ts 0.5Ts Max adjust rate: 2.5Ts 0.5Ts Max step size Tsi, 12Ts 0.5Ts 0.5Ts Max step size Tsi, 12Ts 0.5Ts Max step size Tsi, 12Ts 0.5Ts				
Max adjust rate: 2T ₅			$0.5T_s$	
Max adjust rate: 2T ₅		Min adjust rate: 7Ts	-0.5T _s	Min adjust rate: 6.5Ts
\$\begin{array}{c c c c c c c c c c c c c c c c c c c				
Test 2 (10MHz Ch BW): Uplink timing: ±12Ts Es / Noc: +3.00dB				
Uplink timing: ±12Ts		1237 140c. 13.00dB	10.00D	237 140C. 10.30GD
Uplink timing: ±12Ts		Test 2 (10MHz Ch BW):		Test 2 (10MHz Ch BW):
Es / Noc: +3.00dB			±3T.	
Test 3: (1.4MHz Ch BW) Uplink timing: ±24Ts Max step size T; 16Ts 0.5Ts Max step size T; 16Ts 0.5Ts Max step size T; 16Ts 0.5Ts Max step size T; 16Ts Max adjust rate: 16Ts 65 / Noc: +3.00dB +0.3dB 55 / Noc: +3.0dB				
Uplink timing: ±24T _s Max step size T _q : 16T _s Max adjust rate: 7T _s Max adjust rate: 16T _s 0.5T _s Max adjust rate: 16.5T _s Max adjust rate: 17T _s Max adjust rate: 27T _s Max adjust rate: 27T _s Max adjust rate: 2.5T _s Max adjust rate: 3.5T _s Max		L3 / N _{0C} . +3.00db	T0.50D	LS / N _{0C} . +3.50db
Uplink timing: ±24T _s Max step size T _q : 16T _s Max adjust rate: 7T _s Max adjust rate: 16T _s 0.5T _s Max adjust rate: 16.5T _s Max adjust rate: 17T _s Max adjust rate: 27T _s Max adjust rate: 27T _s Max adjust rate: 2.5T _s Max adjust rate: 3.5T _s Max		Test 3: (1.4MHz Ch BW)		Test 3: (1.4MHz Ch BW)
Max step size T _c : 16T _s 0.5T _s Max step size T _c : 16.5T _s 0.5T _s Min adjust rate: 7T _s 0.5T _s Max adjust rate: 16.5T _s 0.5T _s Max adjust rate: 10.5T _s 0.5T _s Max step size T _c : 2.5T _s Max step size T _c : 2.5T _s 0.5T _s Max step size T _c : 2.5T _s 0.5T _s Max adjust rate: 3.4T _s 0.5T _s Max adjust rate: 3.4T _s 0.5T _s Max adjust rate: 6.5T _s 0.5T _s			+3T.	
Min adjust rate: 7T _s 0.5T _s 0.5T _s Max adjust rate: 16T _s Es / N _{oc} : +3.00dB +0.3dB Es / N _{oc} : +3.30dB 7.1.2 E-UTRAN TDD - UE Transmit Timing Accuracy Tr				May stop size T : 16 5T
Max adjust rate: 16Ts				
\$\frac{\frac{\capacter}{\capacter} \frac{\capacter}{\capacter} \frac{\capacter}{\cap				
Test 1 (10MHz Ch BW):				
Transmit Timing Accuracy Uplink timing: (624 ±12) x T _s Max step size T _c ; 21 _s 0.5T _s 0.5T _s Max step size T _c ; 2.5T _s Min adjust rate: 2T _s 0.5T _s Min adjust rate: 2.5T _s Min adjust rate: 2.5T _s Es / N _{oc} ; +3.00dB Test 2 (10MHz Ch BW): Uplink timing: (624 ±12) x T _s ±3T _s Uplink timing: (624 ±15) x T _s ±3T _s Uplink timing: (624 ±15) x T _s ±3T _s Uplink timing: (624 ±15) x T _s ±3T _s Uplink timing: (624 ±15) x T _s ±3T _s Uplink timing: (624 ±21) x T _s ±3T _s Uplink timing: (624 ±27) x T _s Max step size T _c ; 16.5T _s Max step size T _c ; 16.5T _s Max adjust rate: 6.5T _s Max adjust rat			+0.3dB	
Max step size T _q : 2.5T _s Min adjust rate: 7T _s Max adjust rate: 2T _s Ês / N _{oc} : +3.00dB Test 2 (10MHz Ch BW): Uplink timing: (624 ±12) x T _s Ês / N _{oc} : +3.00dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±24) x T _s Ês / N _{oc} : +3.30dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±24) x T _s Max step size T _q : 2.5T _s Es / N _{oc} : +3.30dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±24) x T _s Max step size T _q : 16T _s Max step size T _q : 16.5T _s D.5T _s Max adjust rate: 16.5T _s Es / N _{oc} : +3.30dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±27) x T _s Max step size T _q : 16.5T _s Es / N _{oc} : +3.30dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±27) x T _s Max step size T _q : 16.5T _s Es / N _{oc} : +3.30dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±27) x T _s Max step size T _q : 16.5T _s Es / N _{oc} : +3.30dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±27) x T _s Max step size T _q : 16.5T _s Es / N _{oc} : +3.30dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±27) x T _s Max step size T _q : 16.5T _s Es / N _{oc} : +3.30dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±27) x T _s Max step size T _q : 16.5T _s Es / N _{oc} : +3.30dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±27) x T _s Max step size T _q : 16.5T _s Es / N _{oc} : +3.30dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±27) x T _s Max step size T _q : 16.5T _s Max step size T _q : 16.5T _s Es / N _{oc} : +3.30dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±27) x T _s Max step size T _q : 16.5T _s Es / N _{oc} : +3.30dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±27) x T _s Max step size T _q : 16.5T _s Max step size T _q : 16.5T _s Max step size T _q : 16.5T _s Max step size fights / N _{oc} : 43.30d				
Max step size T _q : 2.5T _s Min adjust rate: 7T _s Max adjust rate: 2T _s Ês / N _{oc} : +3.00dB Test 2 (10MHz Ch BW): Uplink timing: (624 ±12) x T _s Ês / N _{oc} : +3.00dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±24) x T _s Ês / N _{oc} : +3.30dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±24) x T _s Max step size T _q : 2.5T _s Es / N _{oc} : +3.30dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±24) x T _s Max step size T _q : 16T _s Max step size T _q : 16.5T _s D.5T _s Max adjust rate: 16.5T _s Es / N _{oc} : +3.30dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±27) x T _s Max step size T _q : 16.5T _s Es / N _{oc} : +3.30dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±27) x T _s Max step size T _q : 16.5T _s Es / N _{oc} : +3.30dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±27) x T _s Max step size T _q : 16.5T _s Es / N _{oc} : +3.30dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±27) x T _s Max step size T _q : 16.5T _s Es / N _{oc} : +3.30dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±27) x T _s Max step size T _q : 16.5T _s Es / N _{oc} : +3.30dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±27) x T _s Max step size T _q : 16.5T _s Es / N _{oc} : +3.30dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±27) x T _s Max step size T _q : 16.5T _s Es / N _{oc} : +3.30dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±27) x T _s Max step size T _q : 16.5T _s Max step size T _q : 16.5T _s Es / N _{oc} : +3.30dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±27) x T _s Max step size T _q : 16.5T _s Es / N _{oc} : +3.30dB Test 3: (1.4MHz Ch BW) Uplink timing: (624 ±27) x T _s Max step size T _q : 16.5T _s Max step size T _q : 16.5T _s Max step size T _q : 16.5T _s Max step size fights / N _{oc} : 43.30d	Transmit Timing Accuracy		±3T _s	
Min adjust rate: 7Ts Max adjust rate: 2Ts Es / Noc: +3.00dB Ho.3dB Es / Noc: +3.30dB		Max step size T _q : 2T _s	0.5T _s	Max step size T _q : 2.5T _s
Max adjust rate: 2Ts				Min adjust rate: 6.5T _s
Es / N _{oc} : +3.00dB				
Test 2 (10MHz Ch BW): Uplink timing: (624 ±12) x Ts És / Noc: +3.00dB				
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		120 / 14 ₀₀ : 10.00dB	10.002	207 140g. 10.00dB
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		Test 2 (10MHz Ch BW)		Test 2 (10MHz Ch BW)
\$\frac{\hat{\hat{\mathbb{E}}}{\text{c}} \ N_{\text{oc}} \ +3.00dB			±3T	
Test 3: (1.4MHz Ch BW)				
Uplink timing: (624 ±24) x T _s Max step size T _q : 16T _s Min adjust rate: 7T _s Max adjust rate: 16T _s Es / N _{oc} : +3.00dB 7.2.1 E-UTRAN FDD - UE Timing Advanced Adjustment Accuracy 7.2.2 E-UTRAN TDD - UE Timing Advance Adjustment Accuracy 7.3.1 E-UTRAN FDD Radio Link Monitoring Test for Out- of-sync Uplink timing: (624 ±27) x T _s Max step size T _q : 16.5T _s 0.5T _s 0.5T _s Min adjust rate: 6.5T _s Max adjust rate: 16.5T _s Es / N _{oc} : +3.30dB Timing Advance Adjustment: ±4T _s Same as 7.2.2 During T1: Formula: SNR + TT Subtest 3) During T3: Formula: SNR - TT		ES / N _{oc} . +3.00dB	+0.30D	ES / N _{0c} . +3.300B
Uplink timing: (624 ±24) x T _s Max step size T _q : 16T _s Min adjust rate: 7T _s Max adjust rate: 16T _s Es / N _{oc} : +3.00dB 7.2.1 E-UTRAN FDD - UE Timing Advanced Adjustment Accuracy 7.2.2 E-UTRAN TDD - UE Timing Advance Adjustment Accuracy 7.3.1 E-UTRAN FDD Radio Link Monitoring Test for Out- of-sync Uplink timing: (624 ±27) x T _s Max step size T _q : 16.5T _s 0.5T _s 0.5T _s Min adjust rate: 6.5T _s Max adjust rate: 16.5T _s Es / N _{oc} : +3.30dB Timing Advance Adjustment: ±4T _s Same as 7.2.2 During T1: Formula: SNR + TT Subtest 3) During T3: Formula: SNR - TT		Test 3: (1 4MHz Ch RW)		Test 3: (1 4MHz Ch RW)
Max step size Tq: 16Ts Min adjust rate: 7Ts Min adjust rate: 16Ts Max adjust rate: 16Ts Es / Noc: +3.00dB 7.2.1 E-UTRAN FDD - UE Timing Advanced Adjustment Accuracy 7.2.2 E-UTRAN TDD - UE Timing Advance Adjustment Accuracy 7.3.1 E-UTRAN FDD Radio Link Monitoring Test for Out-of-sync Max step size Tq: 16.5Ts Min adjust rate: 6.5Ts Max adjust rate: 16.5Ts Max adjust rate: 6.5Ts Max adjust rate: 16.5Ts Max adjust rate: 1			±3T	
Min adjust rate: 7Ts Max adjust rate: 16Ts D.5Ts Max adjust rate: 16.5Ts Es / Noc: +3.30dB 7.2.1 E-UTRAN FDD - UE Timing Advance Adjustment: ±4Ts Timing Advance Adjustment: ±4Ts Timing Advance Adjustment: ±4.5Ts Timing Advance Adjustment Accuracy 7.2.2 E-UTRAN TDD - UE Timing Advance Adjustment Accuracy 7.3.1 E-UTRAN FDD Radio Link Monitoring Test for Out-of-sync SNRs as specified SNRs as specified SNRs as specified O.6dB (Subtests Formula: SNR + TT Ouring T2: O.8dB (Subtest 3) During T3: Formula: SNR - TT				
Max adjust rate: 16Ts				
Ês / N _{oc} : +3.00dB				
7.2.1 E-UTRAN FDD - UE Timing Advanced Adjustment Accuracy 7.2.2 E-UTRAN TDD - UE Timing Advance Adjustment Accuracy 7.3.1 E-UTRAN FDD Radio Link Monitoring Test for Out- of-sync Timing Advance Adjustment: ±4Ts Same as 7.2.2 During T1: Formula: SNR + TT Subtest 3) During T3: Formula: SNR - TT				
Timing Advanced Adjustment Accuracy 7.2.2 E-UTRAN TDD - UE Timing Advance Adjustment Accuracy 7.3.1 E-UTRAN FDD Radio Link Monitoring Test for Out- of-sync Same as 7.2.2 Same as 7.2.2 Same as 7.2.2 During T1: Formula: SNR + TT (Subtest 3) During T3: Formula: SNR - TT			+0.3dB	
Adjustment Accuracy 7.2.2 E-UTRAN TDD - UE Timing Advance Adjustment Accuracy 7.3.1 E-UTRAN FDD Radio Link Monitoring Test for Out- of-sync Same as 7.2.2 Same as 7.2.2 7.2.2 0.6dB (Subtests (Subtests) 1&2) During T1: Formula: SNR + TT 0.8dB (Subtest 3) During T2: Formula: SNR + TT During T3: Formula: SNR - TT				
7.2.2 E-UTRAN TDD - UE Timing Advance Adjustment Accuracy 7.3.1 E-UTRAN FDD Radio Link Monitoring Test for Out- of-sync Same as 7.2.2 Same as 7.2.2 7.2.2 0.6dB (Subtests Formula: SNR + TT 1&2) During T2: 0.8dB (Subtest 3) During T3: Formula: SNR - TT		±4T _s	0.5T _S	±4.5T _s
Timing Advance Adjustment Accuracy 7.3.1 E-UTRAN FDD Radio Link Monitoring Test for Out- of-sync SNRs as specified 0.6dB (Subtests Formula: SNR + TT 1&2) During T2: 0.8dB (Subtest 3) During T3: Formula: SNR - TT				
Accuracy 7.3.1 E-UTRAN FDD Radio Link Monitoring Test for Out- of-sync SNRs as specified 0.6dB (Subtests Formula: SNR + TT 1&2) During T2: Formula: SNR + TT (Subtest 3) During T3: Formula: SNR - TT	7.2.2 E-UTRAN TDD - UE	Same as 7.2.2	Same as	Same as 7.2.2
7.3.1 E-UTRAN FDD Radio Link Monitoring Test for Out- of-sync SNRs as specified 0.6dB (Subtests 182) During T1: Formula: SNR + TT During T2: Formula: SNR + TT (Subtest 3) During T3: Formula: SNR - TT	Timing Advance Adjustment		7.2.2	
Link Monitoring Test for Out- of-sync (Subtests Formula: SNR + TT 1&2) During T2: Formula: SNR + TT 0.8dB Formula: SNR + TT 0.8dB Formula: SNR + TT 0.9dB Formula: SNR - TT	Accuracy			
of-sync 1&2) During T2: 0.8dB	7.3.1 E-UTRAN FDD Radio	SNRs as specified	0.6dB	During T1:
0.8dB Formula: SNR + TT (Subtest 3) During T3: 0.9dB Formula: SNR - TT	Link Monitoring Test for Out-		(Subtests	Formula: SNR + TT
0.8dB (Subtest 3) Formula: SNR + TT (Subtest 3) During T3: 0.9dB Formula: SNR - TT			1&2)	
(Subtest 3) During T3: 0.9dB Formula: SNR - TT				During T2:
During T3: 0.9dB Formula: SNR - TT			0.8dB	Formula: SNR + TT
During T3: 0.9dB Formula: SNR - TT			(Subtest 3)	
0.9dB Formula: SNR - TT			·	During T3:
			0.9dB	
			(Subtest 4)	
7.3.2 E-UTRAN FDD Radio SNRs as specified 0.8dB During T1:	7.3.2 E-LITRAN FDD Radio	SNRs as specified		During T1:
Link Monitoring Test for In- (Subtest 1) Formula: SNR + TT		o to do opcomod		
sync (Oublest 1) I official. Sixt + 11	_		(545,656.1)	
0.9dB During T2:	-,		0.9dB	During T2:
(Subtest 2) Formula: SNR + TT				
(3333312)				
During T3:				During T3:
Formula: SNR - TT				
During T4:				During T4:
Formula: SNR - TT				
During T5:				
Formula: SNR + TT	i e			
		SNRs as specified		Same as 7.3.1
of-sync	Link Monitoring Test for Out-	SNRs as specified	Same as 7.3.1	Same as 7.3.1

			1
7.3.4 E-UTRAN TDD Radio	SNRs as specified	Same as	Same as 7.3.2
Link Monitoring Test for In-		7.3.2	
sync			
7.3.5 E-UTRAN FDD Radio	SNRs as specified	0.9dB	Same as 7.3.1
Link Monitoring Test for Out-		(Subtest 1)	
of-sync in DRX		(Gabtoot 1)	
OI-SYNC III DIXX		0.6dB	
	20.15	(Subtest 2)	
7.3.6 E-UTRAN FDD Radio	SNRs as specified	0.6dB	Same as 7.3.2
Link Monitoring Test for In-			
sync in DRX			
7.3.7 E-UTRAN TDD Radio	SNRs as specified	0.9dB	Same as 7.3.1
Link Monitoring Test for Out-	'	(Subtest 1)	
of-sync in DRX		(0001001 1)	
or syric in Brox		0.6dB	
		(Subtest 2)	
7.3.8 E-UTRAN TDD Radio	SNRs as specified	0.6dB	Same as 7.3.2
Link Monitoring Test for In-			
sync in DRX			
8.1.1 E-UTRAN FDD-FDD	During T1:	During T1:	During T1:
intra frequency event	N _{oc} : -98dBm/15kHz	0dB	N _{oc} : -98dBm/15kHz
triggered reporting under	Ês ₁ / N _{oc} : +4.00dB	2.10dB	Ês ₁ / N _{oc} : +6.10dB
fading propagation	Ês ₂ / N _{oc} : -infinity	0dB	Es ₂ / N _{oc} : -infinity
	_52 / NocIIIIIIIII	oub	Loz / Noc Illillity
conditions in asynchronous	Durain at TO	Danier - To	During TO
cells	During T2:	During T2:	During T2:
	N _{oc} : -98dBm/15kHz	0dB	N _{oc} : -98dBm/15kHz
	Ês ₁ / N _{oc} : +4.00dB	2.10dB	Ês ₁ / N _{oc} : +6.10dB
	Ês ₂ / N _{oc} : +4.00dB	2.10dB	Ês ₂ / N _{oc} : +6.10dB
8.1.2 E-UTRAN FDD-FDD	Same as 8.1.1	Same as	Same as 8.1.1
intra frequency event		8.1.1	
triggered reporting under		<u> </u>	
fading propagation			
conditions in synchronous			
cells			
8.1.3 E-UTRAN FDD-FDD	Same as 8.1.1	Same as	Same as 8.1.1
intra frequency event		8.1.1	
triggered reporting under			
fading propagation			
conditions in synchronous			
cells with DRX			
8.2.1 E-UTRAN TDD-TDD	Dunin n T4	D T4 .	Duning of TA
	During T1:	During T1:	During T1:
intra frequency event	N _{oc} : -98dBm/15kHz	0dB	N _{oc} : -98dBm/15kHz
triggered reporting under	Ês ₁ / N _{oc} : +4.00dB	2.10dB	Ês ₁ / N _{oc} : +6. 10dB
fading propagation	Ês ₂ / N _{oc} : -infinity	0dB	Ês₂ / N₀c: -infinity
conditions in synchronous			
cells	During T2:	During T2:	During T2:
	N _{oc} : -98dBm/15kHz	0dB	N _{oc} : -98dBm/15kHz
	Ês ₁ / N _{oc} : +4.00dB	2.60dB	Ês ₁ / N _{oc} : +6.60dB
	Ês ₂ / N _{oc} : +4.00dB	2.60dB	Ês ₂ / N _{oc} : +6.60dB
0.0.0 E LITOAN TOO TOO			
8.2.2 E-UTRAN TDD-TDD	Same as 8.2.1	Same as	Same as 8.2.1
intra-frequency event		8.2.1	
triggered reporting under			
fading propagation			
conditions in synchronous			
cells with DRX			
8.3.1 E-UTRAN FDD-FDD	During T1:	During T1:	During T1:
Inter-frequency event	N _{oc1} : -98dBm/15kHz	0dB	N _{oc1} : -98dBm/15kHz
triggered reporting under	Ês ₁ / N _{oc1} : +4.00dB	0dB	Ês ₁ / N _{oc1} : +4.00dB
		0dB	
fading propagation	N _{oc2} : -98dBm/15kHz		N _{oc2} : -98dBm/15kHz
conditions in asynchronous	És ₂ / N _{oc2} : -infinity	0dB	Es ₂ / N _{oc2} : -infinity
cells			
	During T2:	During T2:	During T2:
	N _{oc1} : -98dBm/15kHz	0dB	N _{oc1} : -98dBm/15kHz
	Ês ₁ / N _{oc1} : +4.00dB	0dB	Ês ₁ / N _{oc1} : +4.00dB
	N _{oc2} : -98dBm/15kHz	0dB	N _{oc2} : -98dBm/15kHz
	Ês ₂ / N _{oc2} : +7.00dB	0dB	Ês ₂ / N _{oc2} : +7.00dB
		345	
		1]

O O O E LITEAN EDD EDD	0	0	0
8.3.2 E-UTRAN FDD-FDD	Same as 8.3.1	Same as	<u>Sames as 8.3.1</u>
Inter-frequency event		<u>8.3.1</u>	
triggered reporting when			
DRX is used under fading			
propagation conditions in			
asynchronous cells			
8.3.3 E-UTRAN FDD-FDD	During T1:	During T1:	During T1:
Inter frequency event	N _{oc1} : -98dBm/15kHz	+1.10dB	N _{oc1} : -96.90dBm/15kHz
triggered reporting under	Ës ₁ / N _{oc1} : +4.00dB	0dB	Ës ₁ / N _{oc1} : +4.00dB
AWGN propagation	N _{oc2} : -98dBm/15kHz	0dB	N _{oc2} : -98dBm/15kHz
conditions in asynchronous	Ës ₂ / N _{oc2} : +4.00dB	0dB	Ës ₂ / N _{oc2} : +4.00dB
cells with DRX when L3			
filtering is used	During T2:	During T2:	During T2:
	N _{oc1} : -98dBm/15kHz	+1.10dB	N _{oc1} : -96.90dBm/15kHz
	Ës ₁ / N _{oc1} : +4.00dB	-2.20dB	Ës ₁ / N _{oc1} : +1.80dB
	N _{oc2} : -98dBm/15kHz	0dB	N _{oc2} : -98dBm/15kHz
	Ês ₂ / N _{oc2} : +24.00dB	0dB	Ës ₂ / N _{oc2} : +24.00dB
8.4.1 E-UTRAN TDD-TDD	During T1:	During T1:	During T1:
Inter-frequency event	N _{oc1} : -98dBm/15kHz	0dB	N _{oc1} : -98dBm/15kHz
triggered reporting under	Ës ₁ / N _{oc1} : +4.00dB	0dB	Ës ₁ / N _{oc1} : +4.00dB
fading propagation	N _{oc2} : -98dBm/15kHz	0dB	N _{oc2} : -98dBm/15kHz
conditions in synchronous	Ês₂ / N _{oc2} : -infinity	0dB	Ës₂ / N _{oc2} : -infinity
cells			
	During T2:	During T2:	During T2:
	N _{oc1} : -98dBm/15kHz	0dB	N _{oc1} : -98dBm/15kHz
	Ës ₁ / N _{oc1} : +4.00dB	0dB	Ês ₁ / N _{oc1} : +4.00dB
	N _{oc2} : -98dBm/15kHz	0dB	N _{oc2} : -98dBm/15kHz
0.4.0.5.1170.411.700.700	Ês ₂ / N _{oc2} : +7.00dB	0dB	Ës ₂ / N _{oc2} : +7.00dB
8.4.2 E-UTRAN TDD-TDD	Same as 8.4.1	Same as	Same as 8.4.1
Inter-frequency event		8.4.1	
triggered reporting when			
DRX is used under fading			
propagation conditions in			
synchronous cells	D : T4	D : T4	D : T4
8.5.1 E-UTRAN FDD -	During T1:	During T1:	During T1:
UTRAN FDD event triggered	E-UTRA Cell 1	040	E-UTRA Cell 1
reporting under fading	Noc: -98dBm/15kHz	0dB	Noc: -98dBm/15kHz
propagation conditions	Ës / Noc: +4.00dB	0dB	Ës / Noc: +4.00dB UTRA Cell 2
	UTRA Cell 2	040	
	loc: -70dBm/3.84MHz	0dB	loc: -70dBm/3.84MHz
	lor / loc: -infinity		lor / loc: -infinity
	During T2:	During T2:	During T2:
	E-UTRA Cell 1	During 12.	E-UTRA Cell 1
	Noc: -98dBm/15kHz	0dB	Noc: -98dBm/15kHz
	Ês / Noc: +4.00dB	0dB	Ês / Noc: +4.00dB
	UTRA Cell 2	GGD	UTRA Cell 2
	loc: -70dBm/3.84MHz	0dB	loc: -70dBm/3.84MHz
	lor / loc: -1.8 dB	0dB	lor / loc: -1.8dB
8.6.1 E-UTRAN TDD -	Same as 8.5.1	Same as	Same as 8.5.1
UTRAN FDD event triggered	June as 0.5.1	8.5.1	Jame as 0.0.1
reporting under fading		0.0.1	
propagation conditions			
propagation conditions	J		

During T1: During T2: During T3: Dur	0.7.4.5.1150.41; 750	In : T4	D : T:	Б : т
Proposition under facing		During 11:	During 11:	
Description				
UTRA Cell 2	reporting under fading			
Lie.: -80dBm/1.28MHz DdB	propagation conditions		0dB	
International Content				
PCCPCH E./lu: 3d8 OdB				
DwPCH_Eclor: 0dB			0dB	
During T2: E-UTRA Cell 1 Noi: -98dBm/15kHz E Noi: +9dB UTRA Cell 2 Loi: -80dBm/128MHz OdB Loi -80dBm/128MHz		PCCPCH_E ₀ /I _{or} : -3dB	0dB	PCCPCH_E _o /I _{or} : -3dB
E-UTRA Cell 1 Noc: -98dBm/15kHz Es / Noc: +94dB UTRA Cell 2 UTRA Cell 3 UTRA Cell 4 UTRA Cell 5 UTRA Cell 5 UTRA Cell 6 UTRA Cell 7 UTRA Cell 8 UTRA Cell 9 UT		DwPCH_Ec/lor: 0dB	0dB	DwPCH_Ec/lor: 0dB
E-UTRA Cell 1 Noc: -98dBm/15kHz Es / Noc: +94dB UTRA Cell 2 UTRA Cell 3 UTRA Cell 4 UTRA Cell 5 UTRA Cell 5 UTRA Cell 6 UTRA Cell 7 UTRA Cell 8 UTRA Cell 9 UT				
E-UTRA Cell 1 Noc: -98dBm/15kHz Es / Noc: +94dB UTRA Cell 2 UTRA Cell 3 UTRA Cell 4 UTRA Cell 5 UTRA Cell 5 UTRA Cell 6 UTRA Cell 7 UTRA Cell 8 UTRA Cell 9 UT		During T2:	During T2:	During T2:
Es / Noc: +9dB		E-UTRA Cell 1		E-UTRA Cell 1
UTRA Cell 2		Noc: -98dBm/15kHz	0dB	Noc: -98dBm/15kHz
Lic80dBm/1.28MHz Lic8.0dBm/1.28MHz Lic8.0dBm/1.28MHz Lic8.0dBm/1.28MHz Lic8.0dBm/1.28MHz Lic8.0dBm/1.28MHz Lic8.0dBm/1.28MHz Lic8.0dBm/1.28MHz Lic8.0dBm/1.28MHz Lic8.0dBm/1.5kHz Lic8.0dBm/1.5kHz Lic8.0dBm/1.5kHz Lic8.0dBm/1.28MHz L		Ês / Noc: +9dB	0dB	Ês / Noc: +9dB
		UTRA Cell 2		UTRA Cell 2
		I _{oc} : -80dBm/1.28MHz	0dB	I _{oc} : -80dBm/1.28MHz
PCCPCH_Es/lai-3dB				
DwPCH Ec/lor: 0dB			0dB	
B.7.2 E-UTRAN TDD -				
UTRAN TDD cell search when DRX is used under lading propagation conditions	8 7 2 F-UTRAN TDD -			
When DRX is used under fading propagation conditions			Daning 11.	
fading propagation Es / Noc: +4dB UTRA Cell 2 Inc: +80dBm/1.28MHz O.40dB UTRA Cell 2 Inc: +80dBm/1.28MHz O.40dB OdB Od			0dB	
UTRA Cell 2 UTRA Cell 2				^
Indicate			оав	
	Conditions		0 404D	
PCCPCH_E/Jor: -3dB				
DwPCH_Ec/lor: 0dB				
During T2: E-UTRA Cell 1 Noc: -98dBm/15kHz Cell 2 loc: -80dBm/1.28MHz OdB Noc: -98dBm/1.28MHz OdB UTRA Cell 2 loc: -80dBm/1.28MHz OdB				
E-UTRA Cell 1 Noc: -98dBm/15kHz Es / Noc: +4dB UTRA Cell 2 Ici80dBm/1.28MHz OdB Es / Noc: +4dB UTRA Cell 2 Ici80dBm/1.28MHz OdB Ici80dBm/1.28MHz Ici80dBm/1.28MHz OdB Ici80dBm/1.28MHz Ici80dBm/1.28MH		DWPCH_Ec/lor: 0dB	OaB	DWPCH_Ec/lor: 0dB
E-UTRA Cell 1 Noc: -98dBm/15kHz Es / Noc: +4dB UTRA Cell 2 Ici80dBm/1.28MHz OdB Es / Noc: +4dB UTRA Cell 2 Ici80dBm/1.28MHz OdB Ici80dBm/1.28MHz Ici80dBm/1.28MHz OdB Ici80dBm/1.28MHz Ici80dBm/1.28MH		D : T0		D . To
Noc:-98dBm/15kHz			During 12:	
\$\frac{\fr				
UTRA Cell 2 loc : -80dBm/1.28MHz loc : -90.40dB loc : -80.40dBm/1.28MHz loc : -80.40d				•
			0dB	
I _{or} / I _{oc} : +9dB PCCPCH_E/I _{or} : -3dB DwPCH_E/I _{or} : -3dB DwPCH_I _{or} : -3dB DwPCH_I _{or} : -3dB DwPCH_I _{or} : -3dB DwPCH_I _{or} : -3dB DwPCH				
Section				
DwPCH_Ec/lor: 0dB		I _{or} / I _{oc} : +9dB	0dB	I _{or} / I _{oc} : +9dB
B.8.1 E-UTRAN FDD - GSM		PCCPCH_E _c /I _{or} : -3dB	0dB	PCCPCH_E _c /I _{or} : -3dB
event triggered reporting in AWGN E-UTRA Cell 1		DwPCH_Ec/lor: 0dB	0dB	DwPCH_Ec/lor: 0dB
AWGN Noc: -98dBm/15kHz	8.8.1 E-UTRAN FDD - GSM	During T1:	During T1:	During T1:
AWGN Noc: -98dBm/15kHz	event triggered reporting in	E-UTRA Cell 1		E-UTRA Cell 1
\$\hat{\text{\te\		Noc: -98dBm/15kHz	0dB	Noc: -98dBm/15kHz
Signal level: -infinity During T2:		Ês / Noc: +4dB	0dB	Ês / Noc: +4dB
Signal level: -infinity During T2:		GSM Cell 2		GSM Cell 2
During T2:			0dB	
E-UTŘA Cell 1 Noc: -98dBm/15kHz OdB Noc: -98dBm/15kHz Ês / Noc: +4dB GSM Cell 2 Signal level: -75 dBm OdB Od		,		,
E-UTŘA Cell 1 Noc: -98dBm/15kHz OdB Noc: -98dBm/15kHz Ês / Noc: +4dB GSM Cell 2 Signal level: -75 dBm OdB Od		During T2	During T2	During T2·
Noc: -98dBm/15kHz			Daning 12.	
Es / Noc: +4dB GSM Cell 2 Signal level: -75 dBm 8.8.2 E-UTRAN FDD- GSM event triggered reporting when DRX is used in AWGN Moc: -98dBm/15kHz Es / Noc: +4.00dB GSM Cell 2 Signal level: -75 dBm During T1: E-UTRA Cell 1 Noc: -98dBm/15kHz Es / Noc: +4.00dB GSM Cell 2 Signal level: -infinity During T2: E-UTRA Cell 1 Noc: -98dBm/15kHz Es / Noc: +4.00dB GSM Cell 2 Signal level: -infinity During T2: E-UTRA Cell 1 Noc: -98dBm/15kHz Es / Noc: +4.00dB GSM Cell 2 Signal level: -infinity During T2: E-UTRA Cell 1 Noc: -98dBm/15kHz Es / Noc: +4.00dB GSM Cell 2 Signal level: -75dBm 8.10.1 E-UTRAN TDD - GSM event triggered Same as 8.8.1 Same as Same as 8.8.1			0dB	
GSM Cell 2 Signal level: -75 dBm OdB Signal level: -75 dBm				
Signal level: -75 dBm			OGB	
8.8.2 E-UTRAN FDD- GSM event triggered reporting when DRX is used in AWGN During T1: E-UTRA Cell 1 Noc: -98dBm/15kHz Ês / Noc: +4.00dB GSM Cell 2 Signal level: -infinity During T2: E-UTRA Cell 1 Noc: -98dBm/15kHz During T2: E-UTRA Cell 1 Same as Signal level: -75dBm 8.10.1 E-UTRAN TDD - GSM event triggered Same as 8.8.1			0dB	
event triggered reporting when DRX is used in AWGN when DRX is used in AWGN E-UTRA Cell 1	9 9 2 E LITDAN EDD CSM			
when DRX is used in AWGN N₀c: -98dBm/15kHz 0dB N₀c: -98dBm/15kHz Ês / N₀c: +4.00dB 0dB Es / N₀c: +4.00dB GSM Cell 2 GSM Cell 2 Signal level: -infinity During T2: During T2: E-UTRA Cell 1 N₀c: -98dBm/15kHz 0dB N₀c: -98dBm/15kHz Es / N₀c: +4.00dB 0dB N₀c: -98dBm/15kHz 6s / N₀c: +4.00dB 0dB Es / N₀c: +4.00dB GSM Cell 2 Signal level: -75dBm 8.10.1 E-UTRAN TDD - Same as 8.8.1 Same as 8.8.1 GSM event triggered Same as 8.8.1			Dulling 11.	
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$			04B	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	when DRA is used in AWGN			
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$			JUB	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$			OAB	
E-UTRA Cell 1 N _{oc} : -98dBm/15kHz Ês / N _{oc} : +4.00dB GSM Cell 2 Signal level: -75dBm 8.10.1 E-UTRAN TDD - GSM event triggered E-UTRA Cell 1 N _{oc} : -98dBm/15kHz 0dB Es / N _{oc} : +4.00dB GSM Cell 2 Signal level: -75dBm Same as 8.8.1 Same as 8.8.1 Same as 8.8.1		olgital levelInfinity	UUD	Signal levelinfinity
E-UTRA Cell 1 N _{oc} : -98dBm/15kHz Ês / N _{oc} : +4.00dB GSM Cell 2 Signal level: -75dBm 8.10.1 E-UTRAN TDD - GSM event triggered E-UTRA Cell 1 N _{oc} : -98dBm/15kHz 0dB Es / N _{oc} : +4.00dB GSM Cell 2 Signal level: -75dBm Same as 8.8.1 Same as 8.8.1 Same as 8.8.1		Duning TO:	During at TO:	During TO:
Noc: -98dBm/15kHz			<u>During 12:</u>	
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$			0.40	
GSM Cell 2 Signal level: -75dBm 8.10.1 E-UTRAN TDD - GSM event triggered GSM Cell 2 Signal level: -75dBm Same as 8.8.1 Same as 8.8.1 Same as 8.8.1				
Signal level: -75dBm OdB Signal level: -75dBm 8.10.1 E-UTRAN TDD - Same as 8.8.1 Same as 8.8.1 GSM event triggered 8.8.1			UdB	
8.10.1 E-UTRAN TDD - Same as 8.8.1 Same as 8.8.1 Same as 8.8.1 8.8.1			L	
GSM event triggered 8.8.1		-		· ·
		Same as 8.8.1		Same as 8.8.1
reporting in AWGN			8.8.1	
	reporting in AWGN			

0 10 2 E LITRAN TOD COM	Como oo 9 9 2		Como oo	Somo oo	0 0 2
8.10.2 E-UTRAN TDD-GSM	Same as 8.8.2		Same as	Same as	8.8.2
event triggered reporting			8.8.2		
when DRX is used in AWGN					
9.1.1.1 FDD Intra Frequency	Test 1:		Test 1:	Test 1:	
Absolute RSRP Accuracy	N _{oc} : -106dBm/15kHz		-0.7dB	Noc: -106.	7dBm/15kHz
, , , , , , , , , , , , , , , , , , , ,	Ês ₁ / N _{oc} : +6.0dB		0dB	Ês ₁ / N _{oc} : +6.0dB	
	Ês ₂ / N _{oc} : +1.0dB		+1.0dB	Ês ₂ / N _{oc} : +2.0dB	
	_ **				
	Reported RSRP values: ±6dB		Via mapping	K5KP_29	to RSRP_43
	Test 2:		Test 2:	Test 2:	
	N _{oc} : -88dBm/15kHz		0dB	Noc: -88dl	Bm/15kHz
	Ês ₁ / N _{oc} : +6.0dB		0dB	Ês ₁ / N _{oc} :	+6.0dB
	Ês ₂ / N _{oc} : +1.0dB		+1.0dB	Ês ₂ / N _{oc} :	
	Reported RSRP values: ±8dB		Via mapping		5 to RSRP_64
	reported North Values. 100B		via mapping	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	7 10 1(3)(1 _0+
	T4 0.		T40	T40	
	Test 3:		Test 3:	Test 3:	
	N _{oc} : -116dBm or -114dBm or -		0dB		dBm or -114dBm or -113dBm
	113dBm or -115dBm /15kHz			or -115dE	Bm /15kHz depending on
	depending on operating band			operating	band
	Ês ₁ / N _{oc} : +3.0dB		0dB	Ês ₁ / N _{oc} :	
	Ês ₂ / N _{oc} : -1.0dB		+0.8dB	Ês ₂ / N _{oc} :	
	Reported RSRP values: ±6dB		Via mapping		7 to RSRP_32
					to RSRP_34
					to RSRP_35
				RSRP_18	3 to RSRP_33
				dependin	g on operating band
	The derivation of the RSRP values takes into account				
	N _{oc} and Ês ₂ / N _{oc} , the allowed UE reporting accuracy				
	The RSRP values given above are for normal conditions. In all cases the RSRP v				
					all cases the RSRP values
	are 3dB wider at each end for extreme conditions.				
9.1.1.2 FDD Intra Frequency	Test 1:				Test 1:
Relative RSRP Accuracy	$\overline{N_{oc}$: -106dBm/15kHz $\overline{0}$ dB				N _{oc} : -106 dBm/15kHz
•	Ês ₁ / N _{oc} : +6.0dB	0 dB			Ês ₁ / N _{oc} : +6.0dB
	Ês ₂ / N _{oc} : +1.0dB	+1.0	dB		Ês ₂ / N _{oc} : +2.0dB
	Reported relative RSRP		napping		RSRP_x-9 to RSRP_x+1
		via i	парріпу		
	values:_±3dB				
	Test 2:	Test	<u>2:</u>		Test 2:
	N _{oc} : -88dBm/15kHz	0dB			N _{oc} : -88dBm/15kHz
	Ês ₁ / N _{oc} : +6.0dB	0dB			Ês ₁ / N _{oc} : +6.0dB
	Ês ₂ / N _{oc} : +1.0dB	+1.0dB			Ês ₂ / N _{oc} : +2.0dB
	Reported relative RSRP				RSRP_x-9 to RSRP_x+1
		Via mapping			
	values:_±3dB				
		 _ .	_		
	Test 3:	Test	<u>3:</u>		Test 3:
	N _{oc} : -116dBm or -114dBm or				N _{oc} : -116dBm or -114dBm or
	-113dBm or -115dBm				-113dBm or -115dBm
	/15kHz depending on				/15kHz depending on
	operating band				operating band
	Ês ₁ / N _{oc} : +3.0dB				Ês ₁ / N _{oc} : +3.0dB
	s ₂ / N _{oc} : -1.0dB +1.0dB			Es ₂ / N _{oc} : 0dB	
	Reported relative RSRP Via mapping			RSRP_x-8 to RSRP_x+2	
	values:_±3dB				
	The derivation of the RSRP values takes into account the uncertainty in Cell 1 an				certainty in Cell 1 and Cell 2
	RSRP from N_{oc} , \hat{E}_{s1} / N_{oc} and \hat{E}_{s2} / N_{oc} , the allowed UE reporting accuracy, and the U				
	mapping function.				
0.4.0.4.TDD1.1.	The RSRP values given above are for both normal and extreme conditions.				
9.1.2.1 TDD Intra Frequency Absolute RSRP Accuracy	Same as 9.1.1.1		Same as 9.1.1.1	Same as	9.1.1.1
9.1.2.2 TDD Intra Frequency	Same as 9.1.1.2		Same as	Same as	9.1.1.2
Relative RSRP Accuracy			9.1.1.2		

9.1.3.1 FDD Inter Frequency	Test 1:	Test 1:	Test 1:		
Absolute RSRP Accuracy	N _{oc1} : -88.65dBm/15kHz	-0.3dB	N _{oc1} : -88.95dBm/15kHz		
	Ês ₁ / N _{oc1} : +10.00dB	0dB	Ês ₁ / N _{oc1} : +10.00dB		
	N _{oc2} : -88.65dBm/15kHz	-0.3dB	N _{oc2} : -88.95dBm/15kHz		
	Ês ₂ / N _{oc2} : +10.00dB	0dB	Ês ₂ / N _{oc2} : +10.00dB		
	Reported RSRP values: ±8dB	Via mapping	RSRP_52 to RSRP_71		
	<u>Test 2:</u>	Test 2:	<u>Test 2:</u>		
	N _{oc1} : -109dBm or -107dBm or -	0dB	N _{oc1} : -109dBm or -107dBm or -		
	106dBm or -108dBm /15kHz		106dBm or -108dBm /15kHz		
	depending on operating band		depending on operating band		
	Ës ₁ / N _{oc1} : +14.00dB	0dB	Ës ₁ / N _{oc1} : +14.00dB		
	N _{oc2} : -116dBm or -114dBm or -	0dB	N _{oc2} : -116dBm or -114dBm or -		
	113dBm or -115dBm /15kHz		113dBm or -115dBm /15kHz		
	depending on operating band		depending on operating band		
	Es ₂ / N _{oc2} : -5.00dB	0dB	Ês ₂ / N _{oc} : -5.00dB		
	Reported RSRP values: ±6dB	Via mapping	RSRP_12 to RSRP_27		
			RSRP_14 to RSRP_29		
			RSRP_15 to RSRP_30		
			RSRP_13 to RSRP_28		
	T		depending on operating band		
	The derivation of the RSRP values	takes into acco	unt the uncertainty in Cell 2 RSRP from		
	N _{oc2} and Ês ₂ / N _{oc2} , the allowed UE reporting accuracy, and the UE mapping function.				
	The RSRP values given above are for normal conditions. In all cases the RSRP are 3dB wider at each end for extreme conditions.				
0.1.2.2 EDD Inter Fraguency	Test 1:		Test 1:		
9.1.3.2 FDD Inter Frequency Relative RSRP Accuracy	N _{oc1} : -88.65dBm/15kHz	Test 1: -0.3dB	N _{oc1} : -88.95dBm/15kHz		
Relative NSRF Accuracy		-0.3dB			
	N _{oc2} : -88.65dBm/15kHz Ês ₁ / N _{oc1} : +10dB	0dB	N _{oc2} : -88.95dBm/15kHz		
	Ês ₂ / N _{oc2} : +10dB	0dB	Es ₁ / N _{oc} : +10dB Es ₂ / N _{oc} : +10dB		
	L32 / 14 _{0C2} . + 10dB	odb	LS ₂ / N _{0C} . + TOUB		
	Reported relative RSRP values:	Via mapping	RSRP_(x-8) to RSRP_(x+8)		
	±6dB				
	Test 2:	Test 2:	Test 2:		
	N _{oc1} : -109dBm or -107dBm or -	-1.1dB	N _{oc1} : -110.1dBm or -108.1dBm or -		
	106dBm or -108dBm /15kHz		107.1dBm or -109.1dBm /15kHz		
	depending on operating band		depending on operating band		
	N _{oc2} : -116dBm or -114dBm or -	0dB	N _{oc2} : -116dBm or -114dBm or -		
	113dBm or -115dBm /15kHz		113dBm or -115dBm /15kHz		
	depending on operating band		depending on operating band		
	Ês ₁ / N _{oc1} : +14dB	0dB	Ês ₁ / N _{oc1} : +14dB		
	Ês ₂ / N _{oc2} : -5.0dB	0dB	Ês ₂ / N _{oc2} : -5.0dB		
	Reported relative RSRP values:	Via mapping	RSRP_(x-33) to RSRP_(x-18)		
	±6dB	via mapping	(X-10)		
			unt the uncertainty in Cell 1 and Cell 2		
	RSRP from N_{oc1} and $\hat{E}s_1$ / N_{oc1} and N_{oc2} and $\hat{E}s_2$ / N_{oc2} , the allowed UE reporting accuracy				
	and the UE mapping function.				
	ITE - DODD b b b	for both normal	and extreme conditions		
	The RSRP values given above are				
9.1.4.1 TDD Inter Frequency Absolute RSRP Accuracy	Same as 9.1.3.1	Same as 9.1.3.1	Same as 9.1.3.1		

0.4.4.0.TDD::: =	T- 14	T	TT
9.1.4.2 TDD Inter Frequency	Test 1:	Test 1:	Test 1:
Relative RSRP Accuracy	N _{oc1} : -88.65dBm/15kHz	-0.3dB	N _{oc1} : -88.95dBm/15kHz
	N _{oc2} : -88.65dBm/15kHz	-0.3dB	N _{oc2} : -88.95dBm/15kHz
	Ês ₁ / N _{oc1} : +10dB	0dB	Ês ₁ / N _{oc} : +10dB
	Ês ₂ / N _{oc2} : +10dB	0dB	Ês ₂ / N _{oc} : +10dB
		0	3271100111002
	Reported relative RSRP values:	Via mapping	RSRP_(x-8) to RSRP_(x+8)
	±6dB		
	Test 2:	Test 2:	Test 2:
	N _{oc1} : -109dBm/15kHz	-1.1dB	N _{oc1} : -110.1dBm/15kHz
	N _{oc2} : -116dBm/15kHz	0dB	N _{oc2} : -116dBm/15kHz
	Ês ₁ / N _{oc1} : +14dB	0dB	Ês ₁ / N _{oc1} : +14dB
	Ês ₂ / N _{oc2} : -5.0dB	0dB	Ês ₂ / N _{oc2} : -5.0dB
	Reported relative RSRP values: ±6dB	Via mapping	RSRP_(x-33) to RSRP_(x-18)
	The derivation of the RSRP values	takes into acco	unt the uncertainty in Cell 1 and Cell 2
			N _{oc2} , the allowed UE reporting accuracy,
	and the UE mapping function.	552 2	1 0 7,
	The RSRP values given above are	for both normal	and extreme conditions.
9.2.1.1 FDD Intra Frequency	Test 1:	Test 1:	Test 1:
Absolute RSRQ Accuracy	N _{oc} : -84.76dBm/15kHz	-0.75dB	N _{oc} : -85.51Bm/15kHz
, Loodidto Norta / toodidoy	Ês ₁ / N _{oc} : +3.0dB	0.73dB 0dB	Ês ₁ / N _{oc} : +3.0dB
		0dB	A
	Es ₂ / N _{oc} : +3.0dB		Es ₂ / N _{oc} : +3.0dB
	Reported RSRQ values: ±2.5dB	Via mapping	RSRQ_04 to RSRQ_16
	Test 2:	Test 2:	Test 2:
	N _{oc} : -103.85dBm/15kHz	0dB	N _{oc} : -103.85dBm/15kHz
		0dB 0dB	
	Ēs ₁ / N _{oc} : -2.9dB		Ës ₁ / N _{oc} : -2.9dB
	Ês ₂ / N _{oc} : -2.9dB	0dB	Ês ₂ / N _{oc} : -2.9dB
	Reported RSRQ values: ±3.5dB	Via mapping	RSRQ_00 to RSRP_14
	Test 3:	Test 3:	Test 3:
	N _{oc} : -116dBm or -114dBm or -	0dB	N _{oc} : -116dBm or -114dBm or -113dBm
	113dBm or -115dBm /15kHz	OGB	or -115dBm /15kHz depending on
			operating band
	depending on operating band	10 4dD	
	Ēs ₁ / N _{oc} : -4.0dB	+0.4dB	Ës ₁ / N _{oc} : -3.6dB
	Ês ₂ / N _{oc} : -4.0dB	+0.4dB	Ës ₂ / N _{oc} : -3.6dB
	Reported RSRQ values: ±3.5dB	Via mapping	RSRQ_00 to RSRQ_14
			ount the uncertainty in Cell 2 RSRQ from
	Noc and Es ₂ / Noc, the allowed UE re		
			ditions. For test 1 the RSRQ values are
	1.5dB wider at each end for extrem	ie conditions, ar	nd for tests 2 and 3 the RSRQ values
	are 0.5dB wider at each end for ext	reme conditions	S
9.2.2.1 TDD Intra Frequency	Test 1:	Test 1:	Test 1:
Absolute RSRQ Accuracy	N _{oc} : -84.76dBm/15kHz	-0.75dB	N _{oc} : -85.51Bm/15kHz
	Ês ₁ / N _{oc} : +3.0dB	0dB	Ês ₁ / N _{oc} : +3.0dB
	Ês ₂ / N _{oc} : +3.0dB	0dB	Ês ₂ / N _{oc} : +3.0dB
	Reported RSRQ values: ±2.5dB	Via mapping	RSRQ_04 to RSRQ_16
	- 1000 100 100 1000 12.00D	, a mapping	
	Test 2:	Test 2:	Test 2:
	N _{oc} : -103.85dBm/15kHz	0dB	N _{oc} : -103.85dBm/15kHz
	Ês ₁ / N _{oc} : -2.9dB	0dB 0dB	Ês ₁ / N _{oc} : -2.9dB
	Ês ₂ / N _{oc} : -2.9dB	0dB	Ês ₂ / N _{oc} : -2.9dB
	Reported RSRQ values: ±3.5dB	Via mapping	RSRQ_00 to RSRP_14
	Topolica Norva values. ±0.00D	via mapping	
	Test 3:	Test 3:	Test 3:
	N _{oc} : -116dBm/15kHz	0dB	N _{oc} : -116dBm/15kHz
	Ês ₁ / N _{oc} : -4.0dB	+0.4dB	Ês ₁ / N _{oc} : -3.6dB
	Ês ₂ / N _{oc} : -4.0dB	+0.4dB	Ês ₂ / N _{oc} : -3.6dB
	Reported RSRQ values: ±3.5dB	Via mapping	RSRQ_00 to RSRQ_14
			ount the uncertainty in Cell 2 RSRQ from
	N_{oc} and $\hat{E}s_2$ / N_{oc} , the allowed UE re		
			ditions. For test 1 the RSRQ values are
			nd for test 2 the RSRQ values are 0.5dB
1	wider at each end for extreme cond	iiiiOH5.	

IO O O A EDD. EDD Inter	T44.	T44:	T44.
9.2.3.1 FDD - FDD Inter	<u>Test 1:</u>	Test 1:	Test 1:
Frequency Absolute RSRQ	N _{oc1} : -80dBm/15kHz	0dB	N _{oc1} : -80dBm/15kHz
Accuracy	N _{oc2} : -80dBm/15kHz	-0.8dB	N _{oc2} : -80.8dBm/15kHz
	Es ₁ / N _{oc1} : -1.75dB	0dB	Ês ₁ / N _{oc1} : -1.75dB
	Ês ₂ / N _{oc2} : -1.75dB	0dB	Es ₂ / N _{oc2} : -1.75dB
	Reported RSRQ values:	Via mapping	
	±2.5dB for normal conditions and		RSRQ_04 to RSRQ_16 (NTC)
	±4dB for extreme conditions		RSRQ_01 to RSRQ_19
	Test 2:		
	N _{oc1} : -104dBm/15kHz	Test 2:	Test 2:
	N _{oc2} : -104dBm/15kHz	0dB	N _{oc1} : -104dBm/15kHz
	Ês ₁ / N _{oc1} : -4.7dB	0dB	N _{oc2} : -104dBm/15kHz
	Ês ₂ / N _{02c} : -4.7dB	0dB	Ês ₁ / N _{oc1} : -4.7dB
	Reported RSRQ values:	0dB	Ês ₂ / N _{o2c} : -4.7dB
	±3.5dB for normal conditions and		LS ₂ / N _{02c} 4./UB
		Via mapping	DODO 00 to DODO 44 (NTO)
	±4dB for extreme conditions		RSRQ_00 to RSRQ_14 (NTC)
			RSRQ 00 to RSRQ 15 (ETC)
	Test 3:		
	N _{oc1} : -119dBm or -117dBm or -	Test 3:	
	116dBm or -118dBm /15kHz	0dB	Test 3:
	depending on operating band		N _{oc1} : -119dBm or -117dBm or -
	N _{oc2} : -119dBm or -117dBm or -		116dBm or -118dBm /15kHz
	116dBm or -118dBm /15kHz	0dB	depending on operating band
	depending on operating band	02	N _{0c2} : -119dBm or -117dBm or -
	Ês ₁ / N _{oc1} : -4.5dB	0dB	116dBm or -118dBm /15kHz
	Ês ₂ / N _{o2c} : -4.5dB	0dB	depending on operating band
	LS ₂ / N _{02c} 4.5ub	оив	
	Damanta d DODO saaksaas	\ /: :	Es ₁ / N _{oc1} : -4.5dB
	Reported RSRQ values:	Via mapping	Ês ₂ / N _{o2c} : -4.5dB
	±3.5dB for normal conditions and		
	±4dB for extreme conditions		RSRQ_00 to RSRQ_14 (NTC)
			RSRQ_00 to RSRQ_15 (ETC)
	The derivation of the RSRQ values	takes into acco	ount the uncertainty in Cell 2 RSRQ from
	N _{oc2} and Ês ₂ / N _{oc2} , the allowed UE	reporting accu	racy, and the UE mapping function.
9.2.3.2 FDD - FDD Inter	Test 1:	Test 1:	Test 1:
Frequency Relative RSRQ	N _{oc1} : -80dBm/15kHz	-0.8dB	N _{oc1} : -80.8dBm/15kHz
	N _{oc2} : -80dBm/15kHz	-0.8dB	N _{0c2} : -80.8dBm/15kHz
TACCHISICV			111002. 00.00Bitt/10tt/12
Accuracy			Ês. / N1 75dB
Accuracy	Ês ₁ / N _{oc1} : -1.75dB	0dB	Ês ₁ / N _{oc1} : -1.75dB
Accuracy	Ês ₁ / N _{oc1} : -1.75dB Ês ₂ / N _{oc2} : -1.75dB	0dB 0dB	Ês ₁ / N _{oc1} : -1.75dB Ês ₂ / N _{oc2} : -1.75dB
Accuracy	Ês ₁ / N _{oc1} : -1.75dB Ês ₂ / N _{oc2} : -1.75dB Reported Relative RSRQ values:	0dB	Ês ₂ / N _{oc2} : -1.75dB
Accuracy	Ês ₁ / N _{oc1} : -1.75dB Ês ₂ / N _{oc2} : -1.75dB <u>Reported Relative RSRQ values:</u> ±3dB for normal conditions and	0dB 0dB	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC)
Accuracy	Ês ₁ / N _{oc1} : -1.75dB Ês ₂ / N _{oc2} : -1.75dB Reported Relative RSRQ values:	0dB 0dB	Ês ₂ / N _{oc2} : -1.75dB
Accuracy	Ês ₁ / N _{oc1} : -1.75dB Ês ₂ / N _{oc2} : -1.75dB <u>Reported Relative RSRQ values:</u> ±3dB for normal conditions and ±4dB for extreme conditions	0dB 0dB	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC)
Accuracy	Ês ₁ / N _{oc1} : -1.75dB Ês ₂ / N _{oc2} : -1.75dB Reported Relative RSRQ values: ±3dB for normal conditions and ±4dB for extreme conditions	0dB 0dB Via mapping	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC)
Accuracy	Ês ₁ / N _{oc1} : -1.75dB Ês ₂ / N _{oc2} : -1.75dB Reported Relative RSRQ values: ±3dB for normal conditions and ±4dB for extreme conditions Test 2: N _{oc1} : -104dBm/15kHz	0dB 0dB Via mapping Test 2:	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC) Test 2:
Accuracy	Ês ₁ / N _{oc1} : -1.75dB Ês ₂ / N _{oc2} : -1.75dB <u>Reported Relative RSRQ values:</u> ±3dB for normal conditions and ±4dB for extreme conditions <u>Test 2:</u> N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz	0dB 0dB Via mapping Test 2: 0dB	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC) Test 2: N _{oc1} : -104dBm/15kHz
Accuracy	Ês ₁ / N _{oc1} : -1.75dB Ês ₂ / N _{oc2} : -1.75dB Reported Relative RSRQ values: ±3dB for normal conditions and ±4dB for extreme conditions Test 2: N _{oc1} : -104dBm/15kHz	0dB 0dB Via mapping Test 2:	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC) Test 2:
Accuracy	Ês ₁ / N _{oc1} : -1.75dB Ês ₂ / N _{oc2} : -1.75dB <u>Reported Relative RSRQ values:</u> ±3dB for normal conditions and ±4dB for extreme conditions <u>Test 2:</u> N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz	0dB 0dB Via mapping Test 2: 0dB	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC) Test 2: N _{oc1} : -104dBm/15kHz
Accuracy	Ês ₁ / N _{oc1} : -1.75dB Ês ₂ / N _{oc2} : -1.75dB <u>Reported Relative RSRQ values</u> : ±3dB for normal conditions and ±4dB for extreme conditions <u>Test 2</u> : N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB	OdB OdB Via mapping Test 2: OdB OdB	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC) Test 2: N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz
Accuracy	Ês ₁ / N _{oc1} : -1.75dB Ês ₂ / N _{oc2} : -1.75dB <u>Reported Relative RSRQ values</u> : ±3dB for normal conditions and ±4dB for extreme conditions <u>Test 2</u> : N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB Ês ₂ / N _{o2c} : -4.7dB	OdB OdB Via mapping Test 2: OdB OdB OdB OdB OdB	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC) Test 2: N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB
Accuracy	Ês ₁ / N _{oc1} : -1.75dB Ês ₂ / N _{oc2} : -1.75dB <u>Reported Relative RSRQ values</u> : ±3dB for normal conditions and ±4dB for extreme conditions <u>Test 2</u> : N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB Ês ₂ / N _{o2c} : -4.7dB <u>Reported Relative RSRQ values</u> :	OdB OdB Via mapping Test 2: OdB OdB OdB OdB	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC) Test 2: N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB Ês ₂ / N _{o2c} : -4.7dB
Accuracy	Ês₁ / N₀c₁: -1.75dB Ês₂ / N₀c₂: -1.75dB Reported Relative RSRQ values: ±3dB for normal conditions and ±4dB for extreme conditions Test 2: N₀c₁: -104dBm/15kHz N₀c₂: -104dBm/15kHz Ês₁ / N₀c₁: -4.7dB Ês₂ / N₀c₂: -4.7dB Reported Relative RSRQ values: ±4dB	OdB OdB Via mapping Test 2: OdB OdB OdB OdB OdB	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC) Test 2: N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB
Accuracy	Ês ₁ / N _{oc1} : -1.75dB Ês ₂ / N _{oc2} : -1.75dB <u>Reported Relative RSRQ values</u> : ±3dB for normal conditions and ±4dB for extreme conditions <u>Test 2</u> : N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB Ês ₂ / N _{o2c} : -4.7dB <u>Reported Relative RSRQ values</u> : ±4dB <u>Test 3</u> :	OdB OdB Via mapping Test 2: OdB OdB OdB OdB OdB	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC) Test 2: N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB Ês ₂ / N _{o2c} : -4.7dB RSRQ_x - 10 to RSRQ_x + 10
Accuracy	Ês ₁ / N _{oc1} : -1.75dB Ês ₂ / N _{oc2} : -1.75dB Reported Relative RSRQ values: ±3dB for normal conditions and ±4dB for extreme conditions Test 2: N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB Ês ₂ / N _{o2c} : -4.7dB Reported Relative RSRQ values: ±4dB Test 3: N _{oc1} : -119dBm or -117dBm or -	OdB OdB Via mapping Test 2: OdB OdB OdB OdB OdB Via mapping	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC) Test 2: N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB Ês ₂ / N _{o2c} : -4.7dB RSRQ_x - 10 to RSRQ_x + 10 Test 3:
Accuracy	Ês ₁ / N _{oc1} : -1.75dB Ês ₂ / N _{oc2} : -1.75dB Reported Relative RSRQ values: ±3dB for normal conditions and ±4dB for extreme conditions Test 2: N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB Ês ₂ / N _{o2c} : -4.7dB Reported Relative RSRQ values: ±4dB Test 3: N _{oc1} : -119dBm or -117dBm or -116dBm or -118dBm /15kHz	OdB OdB Via mapping Test 2: OdB OdB OdB OdB Via mapping Test 3:	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC) Test 2: N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB Ês ₂ / N _{o2c} : -4.7dB RSRQ_x - 10 to RSRQ_x + 10 Test 3: N _{oc1} : -119dBm or -117dBm or -
Accuracy	Ês ₁ / N _{oc1} : -1.75dB Ês ₂ / N _{oc2} : -1.75dB Reported Relative RSRQ values: ±3dB for normal conditions and ±4dB for extreme conditions Test 2: N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB Ês ₂ / N _{o2c} : -4.7dB Reported Relative RSRQ values: ±4dB Test 3: N _{oc1} : -119dBm or -117dBm or -116dBm or -118dBm /15kHz depending on operating band	OdB OdB Via mapping Test 2: OdB OdB OdB OdB OdB Via mapping	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC) Test 2: N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB Ês ₂ / N _{o2c} : -4.7dB RSRQ_x - 10 to RSRQ_x + 10 Test 3: N _{oc1} : -119dBm or -117dBm or - 116dBm or -118dBm /15kHz
Accuracy	Ês₁ / N₀c₁: -1.75dB Ês₂ / N₀c₂: -1.75dB Reported Relative RSRQ values: ±3dB for normal conditions and ±4dB for extreme conditions Test 2: N₀c₁: -104dBm/15kHz N₀c₂: -104dBm/15kHz Ês₁ / N₀c₁: -4.7dB Ês₂ / N₀₂c: -4.7dB Reported Relative RSRQ values: ±4dB Test 3: N₀c₁: -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N₀c₂: -119dBm or -	OdB OdB Via mapping Test 2: OdB OdB OdB OdB Via mapping Test 3: OdB	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC) Test 2: N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB Ês ₂ / N _{o2c} : -4.7dB RSRQ_x - 10 to RSRQ_x + 10 Test 3: N _{oc1} : -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band
Accuracy	Ês₁ / N₀c₁: -1.75dB Ês₂ / N₀c₂: -1.75dB Reported Relative RSRQ values: ±3dB for normal conditions and ±4dB for extreme conditions Test 2: N₀c₁: -104dBm/15kHz N₀c₂: -104dBm/15kHz Ês₁ / N₀c₁: -4.7dB Ês₂ / N₀₂c: -4.7dB Reported Relative RSRQ values: ±4dB Test 3: N₀c₁: -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N₀c₂: -119dBm or -117dBm or - 116dBm or -118dBm /15kHz	OdB OdB Via mapping Test 2: OdB OdB OdB OdB Via mapping Test 3:	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC) Test 2: N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB Ês ₂ / N _{o2c} : -4.7dB RSRQ_x - 10 to RSRQ_x + 10 Test 3: N _{oc1} : -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N _{oc2} : -119dBm or -117dBm or -
Accuracy	Ês₁ / N₀c₁: -1.75dB Ês₂ / N₀c₂: -1.75dB Reported Relative RSRQ values: ±3dB for normal conditions and ±4dB for extreme conditions Test 2: N₀c₁: -104dBm/15kHz N₀c₂: -104dBm/15kHz Ês₁ / N₀c₁: -4.7dB Ês₂ / N₀₂c: -4.7dB Reported Relative RSRQ values: ±4dB Test 3: N₀c₁: -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N₀c₂: -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band	OdB OdB Via mapping Test 2: OdB OdB OdB Via mapping Test 3: OdB OdB	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC) Test 2: N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB Ês ₂ / N _{o2c} : -4.7dB RSRQ_x - 10 to RSRQ_x + 10 Test 3: N _{oc1} : -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N _{oc2} : -119dBm or -117dBm or - 116dBm or -118dBm /15kHz
Accuracy	Ês₁ / N₀c₁: -1.75dB Ês₂ / N₀c₂: -1.75dB Reported Relative RSRQ values: ±3dB for normal conditions and ±4dB for extreme conditions Test 2: N₀c₁: -104dBm/15kHz N₀c₂: -104dBm/15kHz Ês₁ / N₀c₁: -4.7dB Ês₂ / N₀₂c: -4.7dB Reported Relative RSRQ values: ±4dB Test 3: N₀c₁: -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N₀c₂: -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N₀c₂: -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band Ês₁ / N₀c₁: -4.5dB	OdB OdB Via mapping Test 2: OdB OdB OdB OdB Via mapping Test 3: OdB OdB	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC) Test 2: N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB Ês ₂ / N _{o2c} : -4.7dB RSRQ_x - 10 to RSRQ_x + 10 Test 3: N _{oc1} : -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N _{oc2} : -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band
Accuracy	Ês₁ / N₀c₁: -1.75dB Ês₂ / N₀c₂: -1.75dB Reported Relative RSRQ values: ±3dB for normal conditions and ±4dB for extreme conditions Test 2: N₀c₁: -104dBm/15kHz N₀c₂: -104dBm/15kHz Ês₁ / N₀c₁: -4.7dB Ês₂ / N₀₂c: -4.7dB Reported Relative RSRQ values: ±4dB Test 3: N₀c₁: -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N₀c₂: -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band	OdB OdB Via mapping Test 2: OdB OdB OdB Via mapping Test 3: OdB OdB	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC) Test 2: N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB Ês ₂ / N _{o2c} : -4.7dB RSRQ_x - 10 to RSRQ_x + 10 Test 3: N _{oc1} : -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N _{oc2} : -119dBm or -117dBm or - 116dBm or -118dBm /15kHz
Accuracy	Ês₁ / N₀c₁: -1.75dB Ês₂ / N₀c₂: -1.75dB Reported Relative RSRQ values: ±3dB for normal conditions and ±4dB for extreme conditions Test 2: N₀c₁: -104dBm/15kHz N₀c₂: -104dBm/15kHz Ês₁ / N₀c₁: -4.7dB Ês₂ / N₀₂c: -4.7dB Reported Relative RSRQ values: ±4dB Test 3: N₀c₁: -119dBm or -117dBm or -116dBm or -118dBm /15kHz depending on operating band N₀c₂: -119dBm or -117dBm or -116dBm or -118dBm /15kHz depending on operating band N₀c₂: -119dBm or -117dBm or -116dBm or -118dBm /15kHz depending on operating band Ês₁ / N₀c₁: -4.5dB Ês₂ / N₀c₂: -4.5dB	OdB OdB OdB Via mapping Test 2: OdB OdB OdB Via mapping Test 3: OdB OdB OdB OdB	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC) Test 2: N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB Ês ₂ / N _{o2c} : -4.7dB RSRQ_x - 10 to RSRQ_x + 10 Test 3: N _{oc1} : -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N _{oc2} : -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band
Accuracy	Ês₁ / N₀c₁: -1.75dB Ês₂ / N₀c₂: -1.75dB Reported Relative RSRQ values: ±3dB for normal conditions and ±4dB for extreme conditions Test 2: N₀c₁: -104dBm/15kHz N₀c₂: -104dBm/15kHz Ês₁ / N₀c₁: -4.7dB Ês₂ / N₀₂c: -4.7dB Reported Relative RSRQ values: ±4dB Test 3: N₀c₁: -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N₀c₂: -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N₀c₂: -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band Ês₁ / N₀c₁: -4.5dB	OdB OdB Via mapping Test 2: OdB OdB OdB OdB Via mapping Test 3: OdB OdB	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC) Test 2: N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB Ês ₂ / N _{o2c} : -4.7dB RSRQ_x - 10 to RSRQ_x + 10 Test 3: N _{oc1} : -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N _{oc2} : -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N _{oc2} : -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band Ês ₁ / N _{oc1} : -4.5dB
Accuracy	Ês₁ / N₀c₁: -1.75dB Ês₂ / N₀c₂: -1.75dB Reported Relative RSRQ values: ±3dB for normal conditions and ±4dB for extreme conditions Test 2: N₀c₁: -104dBm/15kHz N₀c₂: -104dBm/15kHz Ês₁ / N₀c₁: -4.7dB Ês₂ / N₀₂c: -4.7dB Reported Relative RSRQ values: ±4dB Test 3: N₀c₁: -119dBm or -117dBm or -116dBm or -118dBm /15kHz depending on operating band N₀c₂: -119dBm or -117dBm or -116dBm or -118dBm /15kHz depending on operating band N₀c₂: -119dBm or -117dBm or -116dBm or -118dBm /15kHz depending on operating band Ês₁ / N₀c₁: -4.5dB Ês₂ / N₀c₂: -4.5dB	OdB OdB OdB Via mapping Test 2: OdB OdB OdB Via mapping Test 3: OdB OdB OdB OdB	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC) Test 2: N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB Ês ₂ / N _{o2c} : -4.7dB RSRQ_x - 10 to RSRQ_x + 10 Test 3: N _{oc1} : -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N _{oc2} : -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N _{oc2} : -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band Ês ₁ / N _{oc1} : -4.5dB
Accuracy	Ês₁ / N₀c₁: -1.75dB Ês₂ / N₀c₂: -1.75dB Reported Relative RSRQ values: ±3dB for normal conditions and ±4dB for extreme conditions Test 2: N₀c₁: -104dBm/15kHz N₀c₂: -104dBm/15kHz Ês₁ / N₀c₁: -4.7dB Ês₂ / N₀₂c: -4.7dB Reported Relative RSRQ values: ±4dB Test 3: N₀c₁: -119dBm or -117dBm or -116dBm or -118dBm /15kHz depending on operating band N₀c₂: -119dBm or -117dBm or -116dBm or -118dBm /15kHz depending on operating band N₀c₂: -15dBm or -118dBm /15kHz depending on operating band Ês₁ / N₀c₁: -4.5dB Ês₂ / N₀c₂: -4.5dB Reported Relative RSRQ values:	OdB OdB OdB Via mapping Test 2: OdB OdB OdB Via mapping Test 3: OdB OdB OdB OdB	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC) Test 2: N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB Ês ₂ / N _{o2c} : -4.7dB RSRQ_x - 10 to RSRQ_x + 10 Test 3: N _{oc1} : -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N _{oc2} : -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N _{oc2} : -4.5dBm /15kHz
Accuracy	Ês₁ / N₀c₁: -1.75dB Ês₂ / N₀c₂: -1.75dB Reported Relative RSRQ values: ±3dB for normal conditions and ±4dB for extreme conditions Test 2: N₀c₁: -104dBm/15kHz N₀c₂: -104dBm/15kHz Ês₁ / N₀c₁: -4.7dB Ês₂ / N₀₂c: -4.7dB Reported Relative RSRQ values: ±4dB Test 3: N₀c₁: -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N₀c₂: -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N₀c₂: -15dBm or -116dBm or - 116dBm or -18dBm /15kHz depending on operating band Ês₁ / N₀c₁: -4.5dB Ês₂ / N₀c₂: -4.5dB Reported Relative RSRQ values: ±4dB	OdB OdB OdB Via mapping Test 2: OdB OdB OdB OdB Via mapping Test 3: OdB OdB OdB OdB OdB OdB OdB OdB	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC) Test 2: N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB Ês ₂ / N _{o2c} : -4.7dB RSRQ_x - 10 to RSRQ_x + 10 Test 3: N _{oc1} : -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N _{oc2} : -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N _{oc2} : -15dBm or -118dBm /15kHz depending on operating band Ês ₁ / N _{oc1} : -4.5dB Ês ₂ / N _{o2c} : -4.5dB
Accuracy	Ês₁ / N₀c₁: -1.75dB Ês₂ / N₀c₂: -1.75dB Reported Relative RSRQ values: ±3dB for normal conditions and ±4dB for extreme conditions Test 2: N₀c₁: -104dBm/15kHz N₀c₂: -104dBm/15kHz Ês₁ / N₀c₁: -4.7dB Ês₂ / N₀₂c: -4.7dB Reported Relative RSRQ values: ±4dB Test 3: N₀c₁: -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N₀c₂: -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N₀c₂: -15dBm or -15dBm /15kHz depending on operating band Ês₁ / N₀c₁: -4.5dB Ês₂ / N₀c₂: -4.5dB Reported Relative RSRQ values: ±4dB The derivation of the relative RSRQ	OdB OdB OdB Via mapping Test 2: OdB OdB OdB OdB Via mapping Test 3: OdB	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC) Test 2: N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB Ês ₂ / N _{o2c} : -4.7dB RSRQ_x - 10 to RSRQ_x + 10 Test 3: N _{oc1} : -119dBm or -117dBm or -116dBm or -118dBm /15kHz depending on operating band N _{oc2} : -119dBm or -117dBm or -116dBm or -118dBm /15kHz depending on operating band N _{oc2} : -15dBm or -15dBm /15kHz depending on operating band Es ₁ / N _{oc1} : -4.5dB Es ₂ / N _{o2c} : -4.5dB
Accuracy	Ês₁ / N₀c₁: -1.75dB Ês₂ / N₀c₂: -1.75dB Reported Relative RSRQ values: ±3dB for normal conditions and ±4dB for extreme conditions Test 2: N₀c₁: -104dBm/15kHz N₀c₂: -104dBm/15kHz Ês₁ / N₀c₁: -4.7dB Ês₂ / N₀₂c: -4.7dB Reported Relative RSRQ values: ±4dB Test 3: N₀c₁: -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N₀c₂: -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N₀c₂: -15dBm or -15dBm /15kHz depending on operating band Ês₁ / N₀c₁: -4.5dB Ês₂ / N₀c₂: -4.5dB Reported Relative RSRQ values: ±4dB The derivation of the relative RSRQ	OdB OdB OdB Via mapping Test 2: OdB OdB OdB OdB Via mapping Test 3: OdB OdB OdB OdB OdB OdB OdB OdB OdB O	Ês ₂ / N _{oc2} : -1.75dB RSRQ_x - 8 to RSRQ_x + 8 (NTC) RSRQ_x - 10 to RSRQ_x + 10 (ETC) Test 2: N _{oc1} : -104dBm/15kHz N _{oc2} : -104dBm/15kHz Ês ₁ / N _{oc1} : -4.7dB Ês ₂ / N _{o2c} : -4.7dB RSRQ_x - 10 to RSRQ_x + 10 Test 3: N _{oc1} : -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N _{oc2} : -119dBm or -117dBm or - 116dBm or -118dBm /15kHz depending on operating band N _{oc2} : -15dBm or -118dBm /15kHz depending on operating band Ês ₁ / N _{oc1} : -4.5dB Ês ₂ / N _{o2c} : -4.5dB

9.2.4.1 TDD - TDD Inter Frequency Absolute RSRQ Accuracy	Same as 9.2.3.1		
9.2.4.2 TDD - TDD Inter Frequency Relative RSRQ Accuracy	Same as 9.2.3.2		
9.3.1 E-UTRAN FDD - UTRA FDD CPICH RSCP absolute accuracy	Test 1: E-UTRA Cell 1 Noc: -98.00dBm/15kHz Ês / Noc: +4.00dB UTRA Cell 2 loc: -60.00dBm/3.84MHz lor / loc: +9.54dB CPICH_Ec/lor: -10.00dB Reported CPICH_RSCP values: ±8dB Test 2: E-UTRA Cell 1	Test 1: 0dB 0dB -0.75dB 0dB 0dB Via mapping Test 2:	Test 1: E-UTRA Cell 1 Noc: -98.00dBm/15kHz Ês / Noc: +4.00dB UTRA Cell 2 loc: -60.75dBm/3.84MHz lor / loc: +9.54dB CPICH_Ec/lor: -10.00dB CPICH_RSCP_46 to CPICH_RSCP_63 Test 2:
	Noc: -98.00dBm/15kHz Ês / Noc: +4.00dB UTRA Cell 2 loc: -94.46dBm or -92.46dBm or - 91.46dBm or -93.46dBm /3.84MHz depending on operating band lor / loc: -9.54dB CPICH_Ec/lor: -10.00dB Reported CPICH_RSCP values: ±6dB	0.7dB 0.35dB 0dB Via mapping	E-UTRA Cell 1 Noc: -98.00dBm/15kHz Ês / Noc: +4.00dB UTRA Cell 2 loc: -93.76dBm or -91.76dBm or - 90.76dBm or -92.76dBm /3.84MHz depending on operating band lor / loc: -9.19dB CPICH_Ec/lor: -10.00dB CPICH_RSCP04 to CPICH_RSCP_9 CPICH_RSCP_11 CPICH_RSCP_11 CPICH_RSCP_11 CPICH_RSCP_12 CPICH_RSCP_12 CPICH_RSCP_10 depending on operating band
		od CPICH_Ec/lo	
9.3.2 E-UTRAN TDD - UTRA FDD CPICH RSCP absolute accuracy	Same as 9.3.1		

Annex G (normative): Statistical Testing

G.1 General

FSS

G.2 Statistical testing of delay and UE measurement performance in RRM tests

G.2.1 General

The RRM tests are either of deterministic or of statistical nature. The pass fail limits in tests of statistical nature are expressed as a limit (e.g. delay limit) and a success ratio applicable for the limit. The success ratio is 90% uniform (the complement is the error ratio ER = 10%).

G.2.2 Design of the test

The test is defined by the following design principles (see TS 36.521-1 clause G.X, Theory):

- 1) The early decision concept is applied.
- 2) A second limit is introduced: bad DUT factor M>1

To decide the test pass:

Supplier risk is applied based on the bad DUT quality

To decide the test fails

Customer risk is applied based on the specified DUT quality

The test is defined by the following parameters:

- 1) Limit ER = 0.1 (success ratio = 90%)
- 2) Bad DUT factor M=1.5 (selectivity)
- 3) Confidence level CL = 95% (for specified DUT and bad DUT-quality)

G.2.3 Numerical definition of the pass fail limits

Table G.2.3-1: pass fail limits

ne	ns _p	ns _f	ne	nsp	ns _f	ne	nsp	ns _f	ne	ns _p	ns _f
0	33	NA	43	408	283	86	737	644	129	1056	1021
1	46	NA	44	416	291	87	745	653	130	1064	1030
2	58	2	45	424	299	88	752	661	131	1071	1039
3	69	5	46	432	307	89	760	670	132	1078	1048
4	79	8	47	440	315	90	767	679	133	1086	1057
5	89	12	48	447	324	91	775	687	134	1093	1066
6	99	17	49	455	332	92	782	696	135	1100	1074
7	109	22	50	463	340	93	790	705	136	1108	1083
8	118	27	51	471	348	94	797	713	137	1115	1092
9	127	33	52	478	356	95	804	722	138	1122	1101
10	136	39	53	486	365	96	812	731	139	1130	1110
11	145	45	54	494	373	97	819	739	140	1137	1119
12	154	51	55	502	381	98	827	748	141	1144	1128
13	163	58	56	509	389	99	834	757	142	1152	1137
14	172	64	57	517	398	100	842	766	143	1159	1147
15	180	71	58	525	406	101	849	774	144	1166	1155
16	189	78	59	532	414	102	857	783	145	1174	1164
17	197	85	60	540	423	103	864	792	146	1181	1173
18	206	92	61	548	431	104	871	801	147	NA	1182
19	214	99	62	555	440	105	879	809	148		
20	223	106	63	563	448	106	886	818	149		
21	231	113	64	571	456	107	894	827	150		
22	239	120	65	578	465	108	901	836	151		
23	248	128	66	586	473	109	909	844	152		
24	256	135	67	594	482	110	916	853	153		
25	264	142	68	601	490	111	923	862	154		
26	272	150	69	609	499	112	931	871	155		
27	281	157	70	616	507	113	938	880	156		
28	289	165	71	624	516	114	946	888	157		
29	297	173	72	632	524	115	953	897	158		
30	305	180	73	639	533	116	960	906	159		
31	313	188	74	647	541	117	968	915	160		
32	321	196	75	654	550	118	975	924	161		
33	329	204	76	662	558	119	983	933	162		
34	337	211	77	669	567	120	990	941	163		
35	345	219	78	677	575	121	997	950	164		
36	353	227	79	684	584	122	1005	959	165		
37	361	235	80	692	592	123	1012	968	166		
38	369	243	81	700	601	124	1019	977	167		
39	377	251	82	707	610	125	1027	986	168		
40	385	259	83	715	618	126	1034	994	169		
41	393	267	84	722	627	127	1042	1003			
42	400	275	85	730	635	128	1049	1012		<u> </u>	<u> </u>

The first column is the number of errors (ne = number of exceeded delays or number of wrong reports)

The second column is the number of samples for the pass limit (ns_p , ns=Number of samples= number of successes + number of exceedings or number of reports)

The third column is the number of samples for the fail limit (ns_f)

G.2.4 Pass fail decision rules

The pass fail decision rules apply for a single test, comprising one component in the test vector. The over all Pass /Fail conditions are defined in clause G.2.6

Having observed 0 errors, pass the test at 33+ samples, otherwise continue

Having observed 1 error, pass the test at 46+ samples, otherwise continue

Having observed 2 errors, pass the test at 58+ samples, fail the test at 2 samples, otherwise continue

Having observed 146 errors, pass the test at 1181+ samples, fail the test at 1173- samples, otherwise continue

Having observed 147 errors, fail the test at 1182- samples,

Where x+ means: x or more, x- means x or less

NOTE 1: an ideal DUT passes after 33 samples. The maximum test time is 1181 samples.

G.2.5 Void

G.2.6 Test conditions for delay tests and UE measurement performance

Table G.2.6-1: test conditions

Test	Statistical independence	Number of components in the test vector, as specified in the test requirements and initial conditions of the applicable test	-	Over all Pass/Fail condition
All tests in clauses 4, 5, 6.1, 7.2, 7.3 and 8 are delay tests of statistical nature while 6.2 and 7.1 are not applicable, since deterministic.	Test procedure in all statistical tests ensures independency	1 per operating band (if tested, see 3A.3.3)		Full set of environmental conditions (5) per operating band
All tests in clause 9 are UE level reports of statistical nature	Independency is assumed, although Layer 1 filtering is applied to the reported results	Full set of environmental conditions (5) per operating band		Full set of environmental conditions (5) per operating band

G.X Theory to derive the numbers in Table G.2.3-1 (Informative)

TS 36.521-1 Annex G.X applies

Annex H (normative): Default Message Contents

This annex contains the default values of common messages specific to RRM, other than those described in TS 36.508 [7]. The message contents shall apply to test cases accordingly and unless indicated otherwise in specific test cases, shall be transmitted and checked by the system simulator. The default message contents can be defined for FDD Mode, or TDD Mode or both FDD/TDD Modes. All the messages are listed in alphabetical order based on conformance tests.

NOTE: For example, test case 8.1.1 has an exception for RRCConnectionReconfiguration message and therefore uses message contents according to TS 36.508 [7] with the exception of the RRCConnectionReconfiguration message specified in Annex H.

H.1 Common contents of system information messages exceptions

This clause contains the default values of common system information messages, other than those described in TS 36.508 [7].

H.2 Common contents of system information blocks exceptions

This clause contains the default values of common system information blocks, other than those described in TS 36.508 [7].

H.2.1 System information blocks message contents exceptions for E-UTRAN intra frequency cell re-selection

SystemInformationBlockType3: (FDD/TDD) for E-UTRAN intra-frequency cell re-selection

Table H.2.1-1: SystemInformationBlockType3: E-UTRAN intra frequency cell re-selection

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-2 SystemInformationBlockType3					
Information Element	Value/remark	Comment	Condition		
cellReselectionInfoCommon SEQUENCE {					
q-Hyst	- ()	0 is actual value in dB (0 * 2 dB)			

SystemInformationBlockType4: (FDD/TDD) for E-UTRAN intra-frequency cell re-selection

For Cell 2

Table H.2.1-2: SystemInformationBlockType4: E-UTRAN intra frequency cell re-selection

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-3 SystemInformationBlockType4					
Information Element	Value/remark	Comment	Condition		
intraFreqNeighCellList SEQUENCE (SIZE					
(1maxCellIntra)) OF SEQUENCE {					
IntraFreqNeighCellInfo ::= SEQUENCE {					
intraFreqNeighCellInfo SEQUENCE (SIZE					
(1maxCellIntra)) OF SEQUENCE {					
physCellId	0 (Cell 1 ld)	INTEGER (0503)			
q-OffsetCell	dB0 (0 dB)	0 is actual value in			
·		dB (0 * 2 dB)			
}					
}					

H.2.2 System information blocks message contents exceptions for E-UTRAN inter frequency cell re-selection

SystemInformationBlockType3: (FDD/TDD) for E-UTRAN inter-frequency cell re-selection

Table H.2.2-1: SystemInformationBlockType3: E-UTRAN inter frequency cell re-selection

Information Element	Value/remark	Comment	Condition
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearch	25 (50 dB)	50 is actual value in dB (25 * 2 dB); for Cell 1	
threshServingLow	22 (44 dB)	44 is actual value in dB (22 * 2 dB)	
cellReselectionPriority	4 for cell 1 5 for cell 2		

SystemInformationBlockType5: (FDD/TDD) for E-UTRAN inter-frequency cell re-selection case

For Cell 1

Table H.2.2-2: SystemInformationBlockType5: E-UTRAN inter frequency cell re-selection

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Tab	,		1
Information Element	Value/remark	Comment	Condition
interFreqCarrierFreqList SEQUENCE (SIZE (1maxFreq)) OF SEQUENCE {			
q-Rxlevmin	-70 (-140 dBm)	-140 is actual value in dBm (-70 * 2 dBm)	
threshX-High	24 (48 dB)	48 is actual value in dB (24 * 2 dB)	
threshX-Low	25 (50 dB)	50 is actual value in dB (25 * 2 dB)	
cellReselectionPriority[n]	5 for cell 1		

For Cell 2

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-4 SystemInformationBlockType5					
Information Element	Value/remark	Comment	Condition		
interFreqCarrierFreqList SEQUENCE (SIZE					
(1maxFreq)) OF SEQUENCE {					
q-Rxlevmin	-70 (-140 dBm)	-140 is actual value in dBm (-70 * 2 dBm)			
threshX-High	24 (48 dB)	48 is actual value in dB (24 * 2 dB)			
threshX-Low	25 (50 dB)	50 is actual value in dB (25 * 2 dB)			
cellReselectionPriority[n]	4 for cell 2				
interFreqNeighCellList[n] SEQUENCE (SIZE (1maxCellInter)) OF SEQUENCE {					
physCellId	0 (Cell 1 ld)	INTEGER (0503)			
q-OffsetCell	dB0 (0 dB)	0 is actual value in dB (0 * 2 dB)			
}	•				

H.2.3 System information blocks message contents exceptions for E-UTRAN inter-RAT cell re-selection

SystemInformationBlockType3: for inter-RAT EUTRAN FDD - UTRA FDD is of higher priority cell re-selection

Table H.2.3-1: SystemInformationBlockType3: Inter-RAT E-UTRAN FDD - UTRA FDD is of higher priority cell re-selection

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-2 SystemInformationBlockType3					
Information Element	Value/remark	Comment	Condition		
cellReselectionServingFreqInfo SEQUENCE {					
s-NonIntraSearch	25 (50 dB)	50 is actual value in dB (25 * 2 dB); for Cell 1 (E-UTRA)			
threshServingLow	18 (36 dB)	36 is actual value in dB (18* 2 dB)			

SystemInformationBlockType6: for inter-RAT EUTRAN FDD - UTRA FDD is of higher priority cell re-selection

Table H.2.3-2: SystemInformationBlockType6: Inter-RAT E-UTRAN FDD - UTRA FDD is of higher priority cell re-selection

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4	Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-5 SystemInformationBlockType6					
Information Element	Value/remark	Comment	Condition			
CarrierFreqListUTRA-FDD ::= SEQUENCE (SIZE			UTRA-FDD			
(1maxUTRA-FDD-Carrier)) OF SEQUENCE {						
threshX-High	20 (40 dB)	40 is actual value				
		in dB (20 * 2 dB)				
q-RxLevMin	-58 (-115 dBm)	-115 is actual value				
		in dBm (-58 * 2 + 1				
		dBm)				
p-MaxUTRA	21 (21 dBm)					
q-QualMin	-20 (-20 dB)					
cellReselectionPriority[n]	5	UTRA is of higher				
		priority than E-				
		UTRAN				
}						

SystemInformationBlockType3: for inter-RAT EUTRAN TDD - UTRA TDD is of higher priority cell re-selection

Table H.2.3-3: SystemInformationBlockType3: Inter-RAT E-UTRAN TDD - UTRA TDD is of higher priority cell re-selection

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-2 SystemInformationBlockType3			
Information Element	Value/remark	Comment	Condition
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearch	23 (46 dB)	46 is actual value in dB (23 * 2 dB); for Cell 1 (E-UTRA)	
threshServingLow	12 (24 dB)	24 is actual value in dB (12* 2 dB)	

SystemInformationBlockType6: for inter-RAT EUTRAN TDD - UTRA TDD is of higher priority cell re-selection

Table H.2.3-4: SystemInformationBlockType6: Inter-RAT E-UTRAN TDD - UTRA TDD is of higher priority cell re-selection

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-5 SystemInformationBlockType6				
Information Element	Value/remark	Comment	Condition	
CarrierFreqListUTRA-TDD ::= SEQUENCE (SIZE			UTRA-TDD	
(1maxUTRA-TDD-Carrier)) OF SEQUENCE {				
threshX-High	12 (24 dB)	24 is actual value		
		in dB (12 * 2 dB)		
q-RxLevMin	-52 (-103 dBm)	-103 is actual		
		value in dBm (-52		
		* 2 + 1 dBm)		
p-MaxUTRA	21 (21 dBm)			
cellReselectionPriority[n]	5	UTRA is of higher		
		priority than E-		
		UTRAN		
}				

SystemInformationBlockType3: for inter-RAT EUTRAN FDD/TDD - UTRA FDD is of lower priority cell reselection

Table H.2.3-5: SystemInformationBlockType3: Inter-RAT E-UTRAN FDD/TDD - UTRA FDD is of lower priority cell re-selection

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-2 SystemInformationBlockType3			
Information Element	Value/remark	Comment	Condition
cellReselectionServingFreqInfo SEQUENCE {			
threshServingLow	22 (44 dB)	44 is actual value in dB (22 * 2 dB)	

SystemInformationBlockType6: for inter-RAT EUTRAN FDD/TDD - UTRA FDD is of lower priority cell reselection

Table H.2.3-6: SystemInformationBlockType6: Inter-RAT E-UTRAN FDD/TDD - UTRA FDD is of lower priority cell re-selection

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-5 SystemInformationBlockType6			
Information Element	Value/remark	Comment	Condition
CarrierFreqListUTRA-FDD ::= SEQUENCE (SIZE (1maxUTRA-FDD-Carrier)) OF SEQUENCE {			UTRA-FDD
threshX-Low	21 (42 dB)	42 is actual value in dB (21 * 2 dB)	
q-RxLevMin	-58 (-115 dBm)	-115 is actual value in dBm (-58 * 2 + 1 dBm)	
p-MaxUTRA	21 (21 dBm)		
q-QualMin	-20 (-20 dB)		
}			

SystemInformationBlockType3: for inter-RAT EUTRAN FDD/TDD - UTRA TDD is of lower priority cell reselection

Table H.2.3-7: SystemInformationBlockType3: Inter-RAT E-UTRAN FDD/TDD - UTRA TDD is of lower priority cell re-selection

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-2 SystemInformationBlockType3			
Information Element	Value/remark	Comment	Condition
cellReselectionServingFreqInfo SEQUENCE {			
threshServingLow	,	46 is actual value in dB (23 * 2 dB)	

SystemInformationBlockType6: for inter-RAT EUTRAN FDD/TDD - UTRA TDD is of lower priority cell reselection

Table H.2.3-8: SystemInformationBlockType6: Inter-RAT E-UTRAN FDD/TDD - UTRA TDD is of lower priority cell re-selection

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-5 SystemInformationBlockType6			
Information Element	Value/remark	Comment	Condition
CarrierFreqListUTRA-TDD ::= SEQUENCE (SIZE (1maxUTRA-TDD-Carrier)) OF SEQUENCE {			UTRA-TDD
threshX-Low	12 (24 dB)	24 is actual value in dB (12 * 2 dB)	
q-RxLevMin	-52 (-103 dBm)	-103 is actual value in dBm (-52 * 2 + 1 dBm)	
p-MaxUTRA	21 (21 dBm)		
}			

SystemInformationBlockType3: (FDD/TDD) for inter-RAT E-UTRAN - GSM cell re-selection

Table H.2.3-9: SystemInformationBlockType3: Inter-RAT E-UTRAN - GSM cell re-selection

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-2 SystemInformationBlockType3			
Information Element	Value/remark	Comment	Condition
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearch	Not sent		
threshServingLow	22 (44 dB)	44 is actual value	
		in dB (22 * 2 dB)	
cellReselectionPriority	4		

SystemInformationBlockType7: (FDD/TDD) for inter-RAT E-UTRAN - GSM cell re-selection

Table H.2.3-10: SystemInformationBlockType7: Inter-RAT E-UTRAN - GSM cell re-selection

Derivation Path: TS 36.508 [7] c	lause 4.4.3.3, Table 4.4.3.3-6 S	ystemInformationBlockTy	pe7
Information Element	Value/remark	Comment	Condition
commonInfo SEQUENCE {			
cellReselectionPriority	0		
ncc-Permitted	'11111111'B		
q-RxLevMin	5 (-105 dBm)	-105 is actual value in dBm (5 * 2 - 115 dBm)	
p-MaxGERAN	23 (23 dBm)		GSM 400 & GSM 900 & GSM 850 & GSM 700
	24 (24 dBm)		DCS 1800 & PCS 1900
threshX-High	12 (24 dB)	24 is actual value in dB (12 * 2 dB)	
threshX-Low	12 (24 dB)	24 is actual value in dB (12 * 2 dB)	

SystemInformationBlockType3: Inter-RAT E-UTRAN FDD - HRPD is of lower priority cell re-selection

Table H.2.3-11: SystemInformationBlockType3: Inter-RAT E-UTRAN FDD - HRPD is of lower priority cell re-selection

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table	le 4.4.3.3-2 SystemInformatio	nBlockType3	
Information Element	Value/remark	Comment	Condition
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearch	Not sent		
threshServingLow	22 (44 dB)	44 is actual value in dB (22 * 2 dB)	
cellReselectionPriority	1		
}			
intraFreqCellReselectionInfo SEQUENCE {			
q-RxLevMin	-70 (-140 dBm)	For RF/RRM test cases	
s-IntraSearch	Not present		
t-ReselectionEUTRA	0		

SystemInformationBlockType8: Inter-RAT E-UTRAN FDD - HRPD is of lower priority cell re-selection

Table H.2.3-12: SystemInformationBlockType8: Inter-RAT E-UTRAN FDD - HRPD is of lower priority cell re-selection

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-7 SystemInformationBlockType8				
Information Element	Value/remark	Comment	Condition	
cellReselectionParametersHRPD SEQUENCE {				
bandClassList SEQUENCE (SIZE (1maxCDMA	1 entry			
-BandClass)) OF SEQUENCE {	·			
cellReselectionPriority	0			
threshX-High	60(-30)	INTEGER (063)		
threshX-Low	28(-14)	INTEGER (063)		
}				
}				
t-ReselectionCDMA2000	0	INTEGER (07)		
}		<u> </u>		

H.2.4 System information blocks message contents exceptions for E-UTRAN radio link monitoring (RLM)

SystemInformationBlockType2: (FDD/TDD) for E-UTRAN Radio Link Monitoring test for out-of-sync

Table H.2.4-1: SystemInformationBlockType2: E-UTRAN Radio Link Monitoring test for out-of-sync

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-2 SystemInformationBlockType2			
Information Element	Value/remark	Comment	Condition
SystemInformationBlockType 2 ::= SEQUENCE {			
ue-TimersAndConstants {			
t300	ms1000		
t301	ms1000		
t310	ms0		
n310	n1		
t311	ms1000		
n311	n1		

SystemInformationBlockType2: (FDD/TDD) for E-UTRAN Radio Link Monitoring test for in-sync

Table H.2.4-2: SystemInformationBlockType2: E-UTRAN Radio Link Monitoring test for in-sync

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-2 SystemInformationBlockType2				
Information Element	Value/remark	Comment	Condition	
SystemInformationBlockType 2 ::= SEQUENCE {				
ue-TimersAndConstants {				
t300	ms1000			
t301	ms1000			
t310	ms2000			
n310	n1			
t311	ms1000			
n311	n1			

H.2.5 System information blocks message contents exceptions for RRC Re-establishment

SystemInformationBlockType2: (FDD/TDD) for E-UTRAN Intra-frequency RRC Re-establishment

Table H.2.5-1: SystemInformationBlockType2: E-UTRAN FDD Intra-frequency RRC Re-establishment

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table	4.4.3.3-1 SystemInformationB	BlockType2	
Information Element	Value/remark	Comment	Condition
SystemInformationBlockType 2 ::= SEQUENCE {			
ue-TimersAndConstants {			
t310	ms0		
t311	ms3000		
n310	n1		
n311	n1		

SystemInformationBlockType2: (FDD/TDD) for E-UTRAN Inter-frequency RRC Re-establishment

Table H.2.5-2: SystemInformationBlockType2: E-UTRAN FDD Inter-frequency RRC Re-establishment

Derivation Path: TS 36.508 [7] clause 4.4.3.3, Table 4.4.3.3-1 SystemInformationBlockType2			
Information Element	Value/remark	Comment	Condition
SystemInformationBlockType 2 ::= SEQUENCE {			
ue-TimersAndConstants {			
t310	ms0		
t311	ms5000		
n310	n1		
n311	n1		

H.3 Default RRC messages and information elements contents exceptions

This clause contains the default values of common sRRC messages and information elements, other than those described in TS 36.508 [7].

H.3.1 RRC messages and information elements contents exceptions for E-UTRAN measurement configuration

RRCConnectionReconfiguration: (FDD/TDD) to setup E-UTRAN Measurement Configuration

Table H.3.1-1: RRCConnectionReconfiguration: E-UTRAN Measurement Configuration

Derivation Path: TS 36.508 [7] clause 4.6.1, Table 4.6.1-8 RRCConnectionReconfiguration				
Information Element	Value/remark	Comment	Condition	
RRCConnectionReconfiguration ::= SEQUENCE {				
rrc-TransactionIdentifier	RRC-			
	TransactionIdentifier-DL			
criticalExtensions CHOICE {				
c1 CHOICE{				
rrcConnectionReconfiguration-r8 SEQUENCE {				
measConfig				
}	MeasConfig -DEFAULT		MEAS	
}				
}				
}				

MeasConfig-DEFAULT (FDD/TDD) E-UTRAN measurment configuration for intra frequency measurment

Table H.3.1-2: MeasConfig-DEFAULT: E-UTRAN intra frequency measurement configuration

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-1 MeasConfig-DEFAULT:			
Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModList SEQUENCE (SIZE	1 entry		
(1maxObjectId)) OF SEQUENCE {			
measObjectId	IdMeasObject-f1		
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA-		
	GENERIC(f1)		

}	
}	
reportConfigToRemoveList	Not present
reportConfigToAddModList SEQUENCE (SIZE	1 entry
(1maxReportConfigId))OF SEQUENCE {	
reportConfigId	idReportConfig-A3
reportConfig	ReportConfigEUTRA-A3
}	
measIdToRemoveList	Not present
measIdToAddModList SEQUENCE (SIZE	1 entry
(1maxMeasId)) of SEQUENCE {	
measld	1
measObjectId	IdMeasObject-f1
reportConfigId	idReportConfig-A3
}	
quantityConfig	QuantityConfig-
	DEFAULT
measGapConfig	Not present
s-Measure	Not present
preRegistrationInfoHRPD	Not present
speedStatePars	Not present
}	

MeasConfig-DEFAULT (FDD/TDD) E-UTRAN measurment configuration for inter frequency measurment

Table H.3.1-3: MeasConfig-DEFAULT: E-UTRAN inter frequency measurement configuration

Information Element	Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4	.6.6-1 MeasConfig-DEFAULT:		
measObjectToRemoveList Not present (m.maxObjectId)) OF SEQUENCE { 2 entry MeasObjectToAddMod SEQUENCE { IdMeasObject-f1 measObject CHOICE { IdMeasObject-f1 MeasObjectEUTRA MeasObjectEUTRA-GENERIC(f1) } MeasObjectEUTRA-GENERIC(f1) } IdMeasObject-f2 measObjectId IdMeasObjectEUTRA-GENERIC(f2) measObject CHOICE { MeasObjectEUTRA-GENERIC(f2) } MeasObjectEUTRA-GENERIC(f2) } Inter frequency-GENERIC(f2) } Inter frequency-GENERIC(f2	Information Element	Value/remark	Comment	Condition
MeasObjectToAddModList SEQUENCE (SIZE (1.maxObjectId)) OF SEQUENCE { MeasObjectToAddMod SEQUENCE { measObjectId IdMeasObject-f1 measObjectEUTRA MeasObjectEUTRA MeasObjectEUTRA GENERIC(f1)	MeasConfig-DEFAULT ::= SEQUENCE {			
(1maxObjectId) OF SEQUENCE { MeasObjectToAddMod SEQUENCE { measObject CHOICE { MeasObjectEUTRA MeasObjectEUTRA- GENERIC(f1) } MeasObjectId measObjectId measObjectId measObjectId MeasObjectId measObjectId measObjectEUTRA MeasObjectEUTRA- MeasObjectId measObjectEUTRA MeasObjectEUTRA- GENERIC(f2) } Inter frequency GENERIC(f2) Inter frequ	measObjectToRemoveList	Not present		
MeasObjectToAddMod SEQUENCE { IdMeasObject-f1 measObject CHOICE { MeasObjectEUTRA MeasObjectEUTRA MeasObjectEUTRA-GENERIC(f1) } } MeasObjectToAddMod SEQUENCE { measObjectId measObject CHOICE { MeasObjectEUTRA MeasObjectEUTRA MeasObjectEUTRA-GENERIC(f2) } } } reportConfigToRemoveList reportConfigToAddModList SEQUENCE (SIZE (1.maxReportConfigId))OF SEQUENCE { reportConfigId	measObjectToAddModList SEQUENCE (SIZE	2 entry		
measObjectId IdMeasObject-f1 measObject CHOICE { MeasObjectEUTRA MeasObjectEUTRA MeasObjectEUTRA-GENERIC(f1) } } MeasObjectToAddMod SEQUENCE { measObjectId IdMeasObject-f2 measObject CHOICE { MeasObjectEUTRA MeasObjectEUTRA-GENERIC(f2) } } reportConfigToRemoveList reportConfigToRemoveList reportConfigToAddModList SEQUENCE (SIZE (1.maxReportConfigId))OF SEQUENCE { reportConfigId 1 entry reportConfig ReportConfigEUTRA-A3 } measIdToRemoveList measIdToAddModList SEQUENCE (SIZE (1.maxReportConfigEUTRA-A3) } measIdToAddModList SEQUENCE (SIZE (1.maxMeasId)) of SEQUENCE { measId (1.maxMeasId)) of SEQUENCE { measId (1.maxMeasId)) of SEQUENCE { measId (1.maxMeasId)) of SEQUENCE { measCapConfig (1.maxMeasId) of SEQUENCE { m	(1maxObjectId)) OF SEQUENCE {			
measObjectId IdMeasObject-f1 measObject CHOICE { MeasObjectEUTRA MeasObjectEUTRA MeasObjectEUTRA-GENERIC(f1) } } MeasObjectToAddMod SEQUENCE { measObjectId IdMeasObject-f2 measObject CHOICE { MeasObjectEUTRA MeasObjectEUTRA-GENERIC(f2) } } reportConfigToRemoveList reportConfigToRemoveList reportConfigToAddModList SEQUENCE (SIZE (1.maxReportConfigId))OF SEQUENCE { reportConfigId 1 entry reportConfig ReportConfigEUTRA-A3 } measIdToRemoveList measIdToAddModList SEQUENCE (SIZE (1.maxReportConfigEUTRA-A3) } measIdToAddModList SEQUENCE (SIZE (1.maxMeasId)) of SEQUENCE { measId (1.maxMeasId)) of SEQUENCE { measId (1.maxMeasId)) of SEQUENCE { measId (1.maxMeasId)) of SEQUENCE { measCapConfig (1.maxMeasId) of SEQUENCE { m	MeasObjectToAddMod SEQUENCE {			
MeasObjectEUTRA MeasObjectToAddMod SEQUENCE { MeasObjectId IdMeasObject-f2 MeasObjectCHOICE { MeasObjectEUTRA MeasObjectEUTRA- GENERIC(f2) MeasObjectEUTRA MeasObjectEUTRA- Inter frequency GENERIC(f2) } } reportConfigToRemoveList Not present reportConfigToAddModList SEQUENCE (SIZE (1.maxReportConfigId))OF SEQUENCE { reportConfigId idReportConfig-A3 reportConfig ReportConfigEUTRA-A3 } measIdToRemoveList Not present measIdToAddModList SEQUENCE (SIZE 1 entry (1.maxMeasId)) of SEQUENCE { measId 1 measObjectId IdMeasObject-f2 reportConfigId idReportConfig-A3 } quantityConfig QuantityConfig-DEFAULT measGapConfig QuantityConfig-DEFAULT measGapConfig MeasGapConfig-GP2 s-Measure Not present Not present		IdMeasObject-f1		
GENERIC(f1)	measObject CHOICE {			
GENERIC(f1)	MeasObjectEUTRA	MeasObjectEUTRA-		
measObjectId IdMeasObject-f2 measObject CHOICE { MeasObjectEUTRA MeasObjectEUTRA MeasObjectEUTRA-GENERIC(f2) } } reportConfigToRemoveList reportConfigToAddModList SEQUENCE (SIZE (1.maxReportConfigId))OF SEQUENCE { reportConfigId reportConfig 1 entry reportConfigId idReportConfig-A3 reportConfig ReportConfigEUTRA-A3 } measIdToRemoveList measIdToAddModList SEQUENCE (SIZE (1.maxMeasId)) of SEQUENCE { measId neasObjectId reportConfigId idMeasObject-f2 reportConfigId idReportConfig-A3 } quantityConfig QuantityConfig DEFAULT measGapConfig s-Measure Not present Not present Not present	•			
measObjectId IdMeasObject-f2 measObject CHOICE { MeasObjectEUTRA MeasObjectEUTRA MeasObjectEUTRA-GENERIC(f2) } } reportConfigToRemoveList reportConfigToAddModList SEQUENCE (SIZE (1.maxReportConfigId))OF SEQUENCE { reportConfigId reportConfig 1 entry reportConfigId idReportConfig-A3 reportConfig ReportConfigEUTRA-A3 } measIdToRemoveList measIdToAddModList SEQUENCE (SIZE (1.maxMeasId)) of SEQUENCE { measId neasObjectId reportConfigId idMeasObject-f2 reportConfigId idReportConfig-A3 } quantityConfig QuantityConfig DEFAULT measGapConfig s-Measure Not present Not present Not present	}			
measObjectId IdMeasObject-f2 measObject CHOICE { MeasObjectEUTRA MeasObjectEUTRA MeasObjectEUTRA-GENERIC(f2) } } reportConfigToRemoveList reportConfigToAddModList SEQUENCE (SIZE (1.maxReportConfigId))OF SEQUENCE { reportConfigId reportConfig 1 entry reportConfigId idReportConfig-A3 reportConfig ReportConfigEUTRA-A3 } measIdToRemoveList measIdToAddModList SEQUENCE (SIZE (1.maxMeasId)) of SEQUENCE { measId neasObjectId reportConfigId idMeasObject-f2 reportConfigId idReportConfig-A3 } quantityConfig QuantityConfig DEFAULT measGapConfig s-Measure Not present Not present Not present	}			
measObject CHOICE { MeasObjectEUTRA inter frequency MeasObjectEUTRA inter frequency GENERIC(f2) inter frequency } } reportConfigToRemoveList Not present reportConfigToAddModList SEQUENCE (SIZE (1.maxReportConfigId))OF SEQUENCE { 1 entry reportConfigId reportConfigEUTRA-A3 } Not present measIdToRemoveList Not present measIdToAddModList SEQUENCE (SIZE (1.maxMeasId)) of SEQUENCE { 1 entry measId 1 measObjectId IdMeasObject-f2 reportConfigId idReportConfig-A3 } QuantityConfig-DEFAULT measGapConfig QuantityConfig-DEFAULT measGapConfig Not present preRegistrationInfoHRPD Not present	MeasObjectToAddMod SEQUENCE {			
measObject CHOICE { MeasObjectEUTRA inter frequency MeasObjectEUTRA inter frequency GENERIC(f2) inter frequency } } reportConfigToRemoveList Not present reportConfigToAddModList SEQUENCE (SIZE (1.maxReportConfigId))OF SEQUENCE { 1 entry reportConfigId reportConfigEUTRA-A3 } Not present measIdToRemoveList Not present measIdToAddModList SEQUENCE (SIZE (1.maxMeasId)) of SEQUENCE { 1 entry measId 1 measObjectId IdMeasObject-f2 reportConfigId idReportConfig-A3 } QuantityConfig-DEFAULT measGapConfig QuantityConfig-DEFAULT measGapConfig Not present preRegistrationInfoHRPD Not present		IdMeasObject-f2		
MeasObjectEUTRA MeasObjectEUTRA-GENERIC(f2) inter frequency GENERIC(f2) } } reportConfigToRemoveList reportConfigToAddModList SEQUENCE (SIZE (1.maxReportConfigId))OF SEQUENCE { reportConfigId reportConfig 1 entry reportConfig ReportConfigEUTRA-A3 } measIdToRemoveList measIdToAddModList SEQUENCE (SIZE (1 entry) (1.maxMeasId) of SEQUENCE { measId measObjectId reportConfigId reportC				
GENERIC(f2) } } reportConfigToRemoveList reportConfigToAddModList SEQUENCE (SIZE (1maxReportConfigId))OF SEQUENCE { reportConfigId reportConfigId reportConfig ReportConfigEUTRA-A3 } measIdToRemoveList measIdToAddModList SEQUENCE (SIZE (1maxMeasId)) of SEQUENCE (SIZE (1maxMeasId)) of SEQUENCE (SIZE measId I entry (1maxMeasId)) of SEQUENCE (SIZE (1maxMeasId)) of SEQUENCE (SIZE measId reportConfigEUTRA-A3 } quantityConfig QuantityConfig-A3 } quantityConfig DEFAULT measGapConfig S-Measure Not present MeasGapConfig-GP2 s-Measure Not present		MeasObjectEUTRA-	inter frequency	
reportConfigToAddModList SEQUENCE (SIZE (1maxReportConfigId))OF SEQUENCE { reportConfigId idReportConfig-A3 reportConfig ReportConfigEUTRA-A3 } measIdToRemoveList Not present measIdToAddModList SEQUENCE (SIZE 1 entry (1maxMeasId)) of SEQUENCE { measId measObjectId IdMeasObject-f2 idReportConfig-A3 } quantityConfig QuantityConfig-DEFAULT measGapConfig MeasGapConfig-GP2 s-Measure Not present Not present Not present	•			
reportConfigToAddModList SEQUENCE (SIZE (1maxReportConfigId))OF SEQUENCE { reportConfigId idReportConfig-A3 reportConfig ReportConfigEUTRA-A3 } measIdToRemoveList Not present measIdToAddModList SEQUENCE (SIZE 1 entry (1maxMeasId)) of SEQUENCE { measId measObjectId IdMeasObject-f2 idReportConfig-A3 } quantityConfig QuantityConfig-DEFAULT measGapConfig MeasGapConfig-GP2 s-Measure Not present Not present Not present	}	,		
reportConfigToAddModList SEQUENCE (SIZE (1maxReportConfigId))OF SEQUENCE { reportConfigId idReportConfig-A3 reportConfig ReportConfigEUTRA-A3 } measIdToRemoveList Not present measIdToAddModList SEQUENCE (SIZE 1 entry (1maxMeasId)) of SEQUENCE { measId measObjectId IdMeasObject-f2 idReportConfig-A3 } quantityConfig QuantityConfig-DEFAULT measGapConfig MeasGapConfig-GP2 s-Measure Not present Not present Not present	}			
reportConfigToAddModList SEQUENCE (SIZE (1maxReportConfigId))OF SEQUENCE { reportConfigId idReportConfig-A3 reportConfig ReportConfigEUTRA-A3 } measIdToRemoveList Not present measIdToAddModList SEQUENCE (SIZE 1 entry (1maxMeasId)) of SEQUENCE { measId measObjectId IdMeasObject-f2 idReportConfig-A3 } quantityConfig QuantityConfig-DEFAULT measGapConfig MeasGapConfig-GP2 s-Measure Not present Not present Not present	}			
reportConfigToAddModList SEQUENCE (SIZE (1maxReportConfigId))OF SEQUENCE { reportConfigId idReportConfig-A3 reportConfig ReportConfigEUTRA-A3 } measIdToRemoveList Not present measIdToAddModList SEQUENCE (SIZE 1 entry (1maxMeasId)) of SEQUENCE { measId measObjectId IdMeasObject-f2 idReportConfig-A3 } quantityConfig QuantityConfig-DEFAULT measGapConfig MeasGapConfig-GP2 s-Measure Not present Not present Not present	reportConfigToRemoveList	Not present		
(1maxReportConfigId) idReportConfig-A3 reportConfig ReportConfigEUTRA-A3 } ReportConfigEUTRA-A3 } Not present measIdToAddModList SEQUENCE (SIZE 1 entry (1maxMeasId)) of SEQUENCE { 1 measId 1 measObjectId IdMeasObject-f2 reportConfigId idReportConfig-A3 } QuantityConfig-DEFAULT measGapConfig MeasGapConfig-GP2 s-Measure Not present preRegistrationInfoHRPD Not present				
reportConfig ReportConfigEUTRA-A3 measIdToRemoveList measIdToAddModList SEQUENCE (SIZE (1maxMeasId)) of SEQUENCE { measId measObjectId reportConfigId reportConfigId quantityConfig QuantityConfig- measGapConfig s-Measure preRegistrationInfoHRPD Not present ReportConfigEUTRA-A3 Not present Post of the present of the pr		,		
measIdToRemoveList measIdToAddModList SEQUENCE (SIZE 1 entry (1maxMeasId)) of SEQUENCE { measId measObjectId reportConfigId jdMeasObject-f2 reportConfigId jdReportConfig-A3 } quantityConfig QuantityConfig- measGapConfig s-Measure preRegistrationInfoHRPD Not present	reportConfigld	idReportConfig-A3		
measIdToAddModList SEQUENCE (SIZE 1 entry (1maxMeasId)) of SEQUENCE { 1 measId 1 measObjectId IdMeasObject-f2 reportConfigId idReportConfig-A3 } QuantityConfig-DEFAULT measGapConfig MeasGapConfig-GP2 s-Measure Not present preRegistrationInfoHRPD Not present	reportConfig	ReportConfigEUTRA-A3		
measIdToAddModList SEQUENCE (SIZE 1 entry (1maxMeasId)) of SEQUENCE { 1 measId 1 measObjectId IdMeasObject-f2 reportConfigId idReportConfig-A3 } QuantityConfig-DEFAULT measGapConfig MeasGapConfig-GP2 s-Measure Not present preRegistrationInfoHRPD Not present	}			
measIdToAddModList SEQUENCE (SIZE 1 entry (1maxMeasId)) of SEQUENCE { 1 measId 1 measObjectId IdMeasObject-f2 reportConfigId idReportConfig-A3 } QuantityConfig-DEFAULT measGapConfig MeasGapConfig-GP2 s-Measure Not present preRegistrationInfoHRPD Not present	measIdToRemoveList	Not present		
(1maxMeasId)) of SEQUENCE { measId 1 measObjectId IdMeasObject-f2 reportConfigId idReportConfig-A3 } QuantityConfig-DEFAULT measGapConfig MeasGapConfig-GP2 s-Measure Not present preRegistrationInfoHRPD Not present				
measObjectId IdMeasObject-f2 reportConfigId idReportConfig-A3 } quantityConfig QuantityConfig- DEFAULT measGapConfig MeasGapConfig-GP2 s-Measure Not present preRegistrationInfoHRPD Not present		,		
reportConfigId idReportConfig-A3 } quantityConfig QuantityConfig- DEFAULT measGapConfig MeasGapConfig-GP2 s-Measure Not present preRegistrationInfoHRPD Not present	measld	1		
reportConfigId idReportConfig-A3 } quantityConfig QuantityConfig- DEFAULT measGapConfig MeasGapConfig-GP2 s-Measure Not present preRegistrationInfoHRPD Not present	measObjectId	IdMeasObject-f2		
} QuantityConfig quantityConfig QuantityConfig- DEFAULT DEFAULT measGapConfig MeasGapConfig-GP2 s-Measure Not present preRegistrationInfoHRPD Not present				
DEFAULT measGapConfig s-Measure preRegistrationInfoHRPD DEFAULT MeasGapConfig-GP2 Not present Not present	}	<u> </u>		
DEFAULT measGapConfig s-Measure preRegistrationInfoHRPD DEFAULT MeasGapConfig-GP2 Not present Not present	quantityConfig	QuantityConfig-		
measGapConfig MeasGapConfig-GP2 s-Measure Not present preRegistrationInfoHRPD Not present				
s-Measure Not present PreRegistrationInfoHRPD Not present	measGapConfig			
preRegistrationInfoHRPD Not present				
}				
	}			

MeasConfig-DEFAULT (FDD/TDD) E-UTRAN measurment configuration for E-UTRAN to UTRAN cell search

Table H.3.1-4: *MeasConfig-DEFAULT*: interRAT UTRAN measurement configuration for E-UTRAN to UTRAN cell search

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-1 MeasConfig-DEFAULT:			
Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModList SEQUENCE (SIZE	2 entry		
(1maxObjectId)) OF SEQUENCE {			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f1		
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA- GENERIC(f1)	E-UTRA Cell	
}			
}			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f8		
measObject CHOICE {			
measObjectUTRA	MeasObjectUTRA- GENERIC(f8)	UTRA Cell	
}			
}			
}			
reportConfigToRemoveList	Not present		
reportConfigToAddModList SEQUENCE (SIZE	1 entry		
(1maxReportConfigId))OF SEQUENCE {			
reportConfigId	idReportConfig-B1		
reportConfig	ReportConfigInterRAT- B1-UTRA		
}			
measIdToRemoveList	Not present		
measIdToAddModList SEQUENCE (SIZE (1maxMeasId)) of SEQUENCE {	1 entry		
measld	1		
measObjectId	IdMeasObject-f8		
reportConfigId	idReportConfig-B1		
}	-		
quantityConfig	QuantityConfig- DEFAULT		
measGapConfig	MeasGapConfig-GP2		
s-Measure	Not present		
preRegistrationInfoHRPD	Not present		
speedStatePars	Not present		
}			

MeasConfig-DEFAULT (FDD/TDD) E-UTRAN measurment configuration for E-UTRAN to UTRAN handover

Table H.3.1-5: *MeasConfig-DEFAULT*: interRAT UTRAN measurement configuration for E-UTRAN to UTRAN handover

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-1 MeasConfig-DEFAULT:			
Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModList SEQUENCE (SIZE	2 entry		
(1maxObjectId)) OF SEQUENCE {			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f1		
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA- GENERIC(f1)	E-UTRA Cell	
}			
}			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f8		
measObject CHOICE {			
measObjectUTRA	MeasObjectUTRA- GENERIC(f8)	UTRA Cell	
}			
}			
}			
reportConfigToRemoveList	Not present		
reportConfigToAddModList SEQUENCE (SIZE	1 entry		
(1maxReportConfigId)) OF SEQUENCE {			
reportConfigId	idReportConfig-B2		
reportConfig	ReportConfigInterRAT- B2-UTRA		
}			
measIdToRemoveList	Not present		
measIdToAddModList SEQUENCE (SIZE (1maxMeasId)) OF SEQUENCE {	1 entry		
measld	1		
measObjectId	IdMeasObject-f8		
reportConfigld	IdReportConfig-B2		
}			
quantityConfig	QuantityConfig- DEFAULT		
measGapConfig	MeasGapConfig-GP1		
s-Measure	Not present		
preRegistrationInfoHRPD	Not present		
speedStatePars	Not present		
}			
to the second se			

MeasConfig-DEFAULT (FDD/TDD) E-UTRAN measurment configuration for E-UTRAN to GSM cell search

Table H.3.1-6: *MeasConfig-DEFAULT*: interRAT GSM measurement configuration for E-UTRAN to GSM cell search

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-1 MeasConfig-DEFAULT:			
Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModList SEQUENCE (SIZE	2 entry		
(1maxObjectId)) OF SEQUENCE {			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f1		
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA- GENERIC(f1)	E-UTRA Cell	
}			
}			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f13		
measObject CHOICE {			
measObjectGERAN	MeasObjectGERAN- GENERIC(f13)	GERAN Cell	
}			
}			
}			
reportConfigToRemoveList	Not present		
reportConfigToAddModList SEQUENCE (SIZE	1 entry		
(1maxReportConfigId))OF SEQUENCE {			
reportConfigId	idReportConfig-B1		
reportConfig	ReportConfigInterRAT- B1-GERAN		
}			
measIdToRemoveList	Not present		
measIdToAddModList SEQUENCE (SIZE (1maxMeasId)) of SEQUENCE {	1 entry		
measld	1		
measObjectId	IdMeasObject-f13		
reportConfigId	idReportConfig-B1		
}			
quantityConfig	QuantityConfig- DEFAULT		
measGapConfig	MeasGapConfig-GP1		
s-Measure	Not present		
preRegistrationInfoHRPD	Not present		
speedStatePars	Not present		
}	·		

QuantityConfig-DEFAULT (FDD/TDD) E-UTRAN measurment configuration for L3 filtering is not used

Table H.3.1-7: QuantityConfig-DEFAULT: measurment configuration for L3 filtering is not used

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-3A: QuantityConfig-DEFAULT			
Information Element	Value/remark	Comment	Condition
QuantityConfig-DEFAULT ::= SEQUENCE {			
quantityConfigEUTRA SEQUENCE {			
filterCoefficientRSRP	fc0		
filterCoefficientRSRQ	fc0		
}			
quantityConfigUTRA SEQUENCE {}	Not present		
quantityConfigUTRA SEQUENCE {			UTRAN
measQuantityUTRA-FDD	cpich-EcN0		
measQuantityUTRA-TDD	pccpch-RSCP		
filterCoefficient	fc0		
}			
quantityConfigGERAN SEQUENCE {}	Not present		
quantityConfigGERAN SEQUENCE {			GERAN
measQuantityGERAN	rssi		
filterCoefficient	fc0		
}			
quantityConfigCDMA2000 SEQUENCE {}	Not present		
quantityConfigCDMA2000 SEQUENCE {			CDMA2000
measQuantityCDMA2000	pilotStrength		
}			
}			

Condition	Explanation
UTRAN	For inter-RAT measurements with UTRAN
GERAN	For inter-RAT measurements with GERAN
CDMA2000	For inter-RAT measurements with CDMA2000

Table H.3.1-8: *MeasConfig-DEFAULT*: interRAT HRPD measurement configuration for E-UTRAN to HRPD handover

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4	.6.6-1 MeasConfig-DEFAULT:		
Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModList SEQUENCE (SIZE	2 entry		
(1maxObjectId)) OF SEQUENCE {	-		
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f1		
measObject CHOICE {			
measObjectEUTRA	MeasObjectEUTRA- GENERIC(f1)	E-UTRA Cell	
}			
}			
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f14		
measObject CHOICE {			
measObjectCDMA2000	MeasObjectCDMA2000- GENERIC(f14)	CDMA2000 Cell	
}			
}			
}			
reportConfigToRemoveList	Not present		
reportConfigToAddModList SEQUENCE (SIZE (1maxReportConfigId)) OF SEQUENCE {	1 entry		
reportConfigId	idReportConfig-B2		
reportConfig	ReportConfigInterRAT- B2-CDMA2000		
}			
measIdToRemoveList	Not present		
measIdToAddModList SEQUENCE (SIZE (1maxMeasId)) OF SEQUENCE {	1 entry		
measld	1		
measObjectId	IdMeasObject-f14		
reportConfigId	IdReportConfig-B2		
}	<u> </u>		
quantityConfig	QuantityConfig- DEFAULT		
measGapConfig	MeasGapConfig-GP1		
s-Measure	Not present		
preRegistrationInfoHRPD	Not present		
speedStatePars	Not present		
}			

H.3.2 RRC messages and information elements contents exceptions for E-UTRAN cell re-selection and handover

PRACH-ConfCommonDEFAULT: (FDD) for cell re-selection and handover

Table H.3.2-1: PRACH-ConfCommonDEFAULT: E-UTRAN FDD cell re-selection and handover

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-7 PRACH-ConfCommonDEFAULT			
Information Element Value/remark Comment Condition			
PRACH-ConfigInfo SEQUENCE {			
prach-ConfigIndex	4		

PRACH-ConfCommonDEFAULT: (TDD) for cell re-selection and intra frequency / inter frequency handover

Table H.3.2-2: PRACH-ConfCommonDEFAULT: E-UTRAN TDD cell re-selection and handover

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-7 PRACH-ConfCommonDEFAULT				
Information Element Value/remark Comment Condition				
PRACH-ConfigInfo SEQUENCE {				
prach-ConfigIndex	53			

H.3.3 RRC messages and information elements contents exceptions for E-UTRAN inter-RAT handover

Handover: (FDD/TDD) to perform Inter-RAT E-UTRAN - UTRAN handover

Table H.3.3-1: Handover: Inter-RAT E-UTRAN - UTRAN handover

Derivation Path: 36.331 clause 6.2.2			
Information Element	Value/remark	Comment	Condition
Handover ::= SEQUENCE {			
targetRAT-Type	utra	ENUMERATED	
		{utra, geran,	
		cdma2000-1XTT,	
		cdma2000-HRPD,	
		spare4, spare3,	
		spare2, spare1,}	

Handover: (FDD/TDD) to perform Inter-RAT E-UTRAN - GSM handover

Table H.3.3-2: Handover: Inter-RAT E-UTRAN - GSM handover

	Derivation Path: 36.331 clause 6.2	2.2	
Information Element	Value/remark	Comment	Condition
Handover ::= SEQUENCE {			
targetRAT-Type	geran	ENUMERATED	
		{utran, geran,	
		cdma2000-1XTT,	
		cdma2000-HRPD,	
		spare4, spare3,	
		spare2, spare1,}	

MobilityFromEUTRACommand: (FDD/TDD) to setup Inter-RAT E-UTRAN handover

Table H.3.3-3: MobilityFromEUTRACommand: Inter-RAT E-UTRAN handover

Derivation Path: TS 36.508 [7] clause 4.6.1, Table 4.6.1-6 MobilityFromEUTRACommand				
Information Element	Value/remark	Comment	Condition	
MobilityFromEUTRACommand ::= SEQUENCE {				
rrc-TransactionIdentifier	RRC-			
	TransactionIdentifier-DL			
criticalExtensions CHOICE {				
c1 CHOICE {				
mobilityFromEUTRACommand-r8 SEQUENCE {				
csFallbackIndicator	Not present			
purpose CHOICE {				
Handover	Handover			
}				
nonCriticalExtension SEQUENCE {}	Not present			
}				
}				
}				
}				

Handover: (FDD/TDD) to perform Inter-RAT E-UTRAN – HRPD handover

Table H.3.3-4: Handover: Inter-RAT E-UTRAN - HRPD handover

Derivation Path: 36.331 clause 6.2.2			
Information Element	Value/remark	Comment	Condition
Handover ::= SEQUENCE {			
targetRAT-Type	cdma2000-HRPD	ENUMERATED	
		{utran, geran,	
		cdma2000-1XTT,	
		cdma2000-HRPD,	
		spare4, spare3,	
		spare2, spare1,}	

H.3.4 RRC messages and information elements exceptions for E-UTRAN UE transmit timing accuracy and UE timing advance adjustment accuracy

RRCConnectionReconfiguration: (FDD/TDD) to establish E-UTRAN Radio Resource Configuration

Table H.3.4-1: RRCConnectionReconfiguration: E-UTRAN Radio Resource Configuration

Derivation Path: TS 36.508 [7] clause 4.6.1, Table 4.6		เลแบบ	
Information Element	Value/remark	Comment	Condition
RRCConnectionReconfiguration ::= SEQUENCE {			
Rrc-TransactionIdentifier	RRC-		
	TransactionIdentifier-DL		
criticalExtensions CHOICE {			
C1 CHOICE{			
rrcConnectionReconfiguration-r8 SEQUENCE {			
radioResourceConfigDedicated			
-	RadioResourceConfigDed icated-HO-TO-EUTRA(n.m)		HO-TO- EUTRA(n,m)

PhysicalConfigDedicated-DEFAULT: (FDD/TDD) for E-UTRAN Physical Configuration

Table H.3.4-2: PhysicalConfigDedicated-DEFAULT: E-UTRAN Physical Configuration

Derivation Path: TS 36.508 [7] clause 4.8.21.6, Table 4.8.2.1.6-1 PhysicalConfigDedicated-DEFAULT				
Information Element	Value/remark	Comment	Condition	
PhysicalConfigDedicated-DEFAULT ::= SEQUENCE				
{				
soundingRS-UL-ConfigDedicated			SRB1	
	SoundingRS-UL-		RBC	
	ConfigDedicated-			
	DEFAULT			
antennalnformation CHOICE {				
defaultValue	NULL			
}				
schedulingRequestConfig	Not present		SRB1	

H.3.5 RRC messages and information elements contents exceptions for E-UTRAN RSRP and RSRQ Accuracy

MeasConfig: (FDD/TDD) to perform Measurement Configuration for E-UTRAN intra frequency RSRP and RSRQ accuracy

Table H.3.5-1: MeasConfig-DEFAULT: E-UTRAN intra frequency RSRP and RSRQ Accuracy

Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModList SEQUENCE (SIZE	1 entry		
(1maxObjectId)) OF SEQUENCE {			
measObjectId	IdMeasObject-f1	f 1 is the frequency	
		of the serving cell	
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA- GENERIC(f1)		
}			
}			
reportConfigToRemoveList	Not present		
reportConfigToAddModList SEQUENCE (SIZE (1maxReportConfigId))OF SEQUENCE {	1 entry		
reportConfigId	idReportConfig-P		
reportConfig	ReportConfigEUTRA- PERIODICAL		
}	T ETTO BIOTIE		
measIdToRemoveList	Not present		
measIdToAddModList SEQUENCE (SIZE (1maxMeasId)) of SEQUENCE {			
measld	1		
measObjectId	IdMeasObject-f1		
reportConfigld	idReportConfig-P		
}	·		
quantityConfig	QuantityConfig-DEFAULT		
measGapConfig	Not present		
s-Measure	Not present		
preRegistrationInfoHRPD	Not present		
speedStatePars	Not present		

MeasConfig: (FDD/TDD) perform Measurement Configuration for E-UTRAN inter frequency RSRP and RSRQ accuracy

Table H.3.5-2: MeasConfig-DEFAULT: E-UTRAN inter frequency RSRP and RSRQ Accuracy

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.	6.6-1 MeasConfig-DEFAULT		
Information Element	Value/remark	Comment	Condition
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToRemoveList	Not present		
measObjectToAddModList SEQUENCE (SIZE	2 entry		
(1maxObjectId)) OF SEQUENCE {	·		
MeasObjectToAddMod SEQUENCE {			
measObjectId	IdMeasObject-f1	f 1 is the frequency of the serving cell	
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA- GENERIC(f1)		
}			
}			
MeasObjectToAddMod SEQUENCE {	1.114	(0: 1) (
measObjectId	IdMeasObject-f2	f 2 is the frequency of the neighbouring cell	
measObject CHOICE {			
MeasObjectEUTRA	MeasObjectEUTRA- GENERIC(f2)		
}			
}			
}			
reportConfigToRemoveList	Not present		
reportConfigToAddModList SEQUENCE (SIZE (1maxReportConfigId))OF SEQUENCE {	1 entry		
reportConfigId	idReportConfig-P		
reportConfig	ReportConfigEUTRA- PERIODICAL		
}			
measIdToRemoveList	Not present		
measIdToAddModList SEQUENCE (SIZE (1maxMeasId)) of SEQUENCE {	1 entry		
measld	1		
measObjectId	IdMeasObject-f2		
reportConfigId	idReportConfig-P		
}			
quantityConfig	QuantityConfig-DEFAULT		
measGapConfig	MeasGapConfig-GP1		
s-Measure	Not present		
preRegistrationInfoHRPD	Not present		
speedStatePars	Not present		
}			

ReportConfigEUTRA-PEROIDICAL: (FDD/TDD) for periodical configuration reporting of E-UTRAN RSRP accuracy

Table H.3.5-3: ReportConfigEUTRA-PERIODICAL: E-UTRAN RSRP Accuracy

Derivation Path: TS 36.508 [7] clause 4.6.6, Table 4.6.6-7 ReportConfigEUTRA-PERIODICAL				
Information Element	Value/remark	Comment	Condition	
ReportConfigEUTRA-PERIODICAL ::= SEQUENCE {				
triggerType CHOICE {				
periodical SEQUENCE {				
purpose	reportStrongestCells			
}				
}				
triggerQuantity	rsrp			
reportQuantity	sameAsTriggerQuantity			
maxReportCells	1			
reportInterval	ms1024 (1024 ms)			
reportAmount	Infinity			
}				

ReportConfigEUTRA-PEROIDICAL: (FDD/TDD) for periodical configuration reporting of E-UTRAN RSRQ accuracy

Table H.3.5-4: ReportConfigEUTRA-PERIODICAL: E-UTRAN RSRQ Accuracy

Information Element	Value/remark	Comment	Condition
ReportConfigEUTRA-PERIODICAL ::= SEQUENCE {			
triggerType CHOICE {			
periodical SEQUENCE {			
purpose	reportStrongestCells		
}			
}			
triggerQuantity	rsrq		
reportQuantity	sameAsTriggerQuantity		
maxReportCells	1		
reportInterval	ms1024 (1024 ms)		
reportAmount	Infinity		

H.3.6 RRC messages and information elements contents exceptions for E-UTRAN inter frequency handover and E-UTRAN intra frequency cell search

MAC-MainConfig-RBC: (FDD/TDD) to perform DRX Configuration for E-UTRAN - inter-frequency handover and E-UTRAN intra-frequency cell search with DRX_S

Table H.3.6-1: MAC-MainConfig-RBC: E-UTRAN inter frequency handover and E-UTRAN intra frequency cell search with DRX_S

Derivation Path: TS 36.508 [7] clause 4.8.2.1.5, Table	le 4.8.2.1.6-1 MAC-MainConf	fig-RBC	
Information Element	Value/remark	Comment	Condition
MAC-MainConfig-RBC ::= SEQUENCE {			
ul-SCH-Config SEQUENCE {			
maxHARQ-Tx	n5		
periodicBSR-Timer	sf20		
retxBSR-Timer	sf1280		
ttiBundling	FALSE		
}			
drx-Config CHOICE {			DRX_S
Release	NULL		
setup SEQUENCE {			
onDurationTimer	psf2		
drx-InactivityTimer	psf100		
drx-RetransmissionTimer	sf16		
longDRX-CycleStartOffset CHOICE {		sf40 typical value in real network for best-effort services.	
sf40	0		
}			
shortDRX	Not present		
}			
}			

MAC-MainConfig-RBC: (FDD/TDD) to perform DRX Configuration for E-UTRAN - inter-frequency handover and E-UTRAN intra-frequency cell search with DRX_L

Table H.3.6-2: MAC-MainConfig-RBC: E-UTRAN inter frequency handover and E-UTRAN intra frequency cell search with DRX_L

Information Element	Value/remark	Comment	Condition
MAC-MainConfig-RBC ::= SEQUENCE {			
ul-SCH-Config SEQUENCE {			
maxHARQ-Tx	n5		
periodicBSR-Timer	sf20		
retxBSR-Timer	sf1280		
ttiBundling	FALSE		
}			
drx-Config CHOICE {			DRX_L
Release	NULL		
Setup SEQUENCE {			
onDurationTimer	psf6		
drx-InactivityTimer	psf1920		
drx-RetransmissionTimer	sf16		
longDRX-CycleStartOffset CHOICE {		sf1280 typical	
		value in real	
		network for best-	
		effort services.	
sf1280	0		
}			
shortDRX	Not present		
}			
}			

H.3.7 RRC messages and information elements contents exceptions for E-UTRAN inter frequency and E-UTRAN inter-RAT cell search when DRX is used

MAC-MainConfig-RBC: (FDD/TDD) to perform DRX Configuration for E-UTRAN - inter-frequency and E-UTRAN inter-RAT cell search when DRX = 40 ms

Table H.3.7-1: *MAC-MainConfig-RBC*: E-UTRAN inter frequency cell search and E-UTRAN intra frequency cell search when DRX = 40 ms

Derivation Path: TS 36.508 [7] clause 4.8.2.1.5, T	able 4.8.2.1.6-1 MAC-MainConf	fig-RBC	
Information Element	Value/remark	Comment	Condition
MAC-MainConfig-RBC ::= SEQUENCE {			
ul-SCH-Config SEQUENCE {			
maxHARQ-Tx	n5		
periodicBSR-Timer	sf20		
retxBSR-Timer	sf1280		
ttiBundling	FALSE		
}			
drx-Config CHOICE {			
Release	NULL		
Setup SEQUENCE {			
onDurationTimer	psf1		
drx-InactivityTimer	psf1		
drx-RetransmissionTimer	sf1		
longDRX-CycleStartOffset CHOICE {		sf40 typical value	
		in real network for	
		real-time services.	
sf40	9	To avoid	
		overlapping with	
		measurement	
		gap.	
}			
shortDRX	Not present		
}			
}			
timeAlignmentTimerDedicated	sf500		

MAC-MainConfig-RBC: (FDD/TDD) to perform DRX Configuration for E-UTRAN - inter-frequency and E-UTRAN inter-RAT cell search when DRX = 1280 ms

Table H.3.7-2: MAC-MainConfig-RBC: E-UTRAN inter frequency and E-UTRAN inter-RAT cell search when DRX = 1280 ms

Derivation Path: TS 36.508 [7] clause 4.8.2.1.5, T	able 4.8.2.1.6-1 MAC-MainCon	fig-RBC	
Information Element	Value/remark	Comment	Condition
MAC-MainConfig-RBC ::= SEQUENCE {			
ul-SCH-Config SEQUENCE {			
maxHARQ-Tx	n5		
periodicBSR-Timer	sf20		
retxBSR-Timer	sf1280		
ttiBundling	FALSE		
}			
drx-Config CHOICE {			
Release	NULL		
Setup SEQUENCE {			
onDurationTimer	psf1		
drx-InactivityTimer	psf1		
drx-RetransmissionTimer	sf1		
longDRX-CycleStartOffset CHOICE {		sf1280 typical	
		value in real	
		network for best-	
41.7.7		effort services.	
sf1280	9	To avoid	
		overlapping with	
		measurement	
		gap.	
) obortDDV	Not propert		
shortDRX	Not present		
}			
time Aligners at Time at Dadicate d	-4500		
timeAlignmentTimerDedicated	sf500		

PhysicalConfigDedicated-DEFAULT: (FDD/TDD) to perform DRX Configuration for E-UTRAN - interfrequency and E-UTRAN inter-RAT cell search

Table H.3.7-3: *PhysicalConfigDedicated-DEFAULT*: E-UTRAN inter frequency and E-UTRAN inter-RAT cell search

Derivation Path: TS 36.508 [7] clause 4.8.2.1.6, Table 4	4.8.2.1.6-1 PhysicalConfigDe	edicated-DEFAULT	
Information Element	Value/remark	Comment	Condition
PhysicalConfigDedicated-DEFAULT ::= SEQUENCE {			

schedulingRequestConfig	SchedulingRequest-		
	Config-DEFAULT		
}			

Annex I: Change history

					Change history		
Date	TSG #	TSG Doc.	CR	Re v	Subject/Comment	Old	New
2008-06	RAN5#39bis	R5-082129			R5-082129: Restructure of TS 36.521-1 and RRM proposal (Split of RRM from 36.521-1 v0.2.0 in its own specification 36.521-3 v0.1.0)		0.1.0
2008-06	RAN5#39bis	R5-082174			Following approved TPs have been included: R5-082129: Restructure of TS 36.521-1 and RRM proposal (Split of RRM from 36.521-1 v0.2.0 in its own specification 36.521-3 v0.1.0) R5-082160: Cover for LTE E-UTRAN RRC_IDLE State Mobility text proposal R5-082161: Cover for LTE E-UTRAN RRC_CONNECTED State Mobility text proposal R5-082162: Update of 36.521-1: Introduction of HRPD and CDMA2000 in RRM test cases R5-082163: Cover for LTE UE Transmit Timing Requirements text proposal Editorial changes for Annexes	0.1.0	0.2.0
2008-08	RAN5#40	R5-083164			Following approved TPs have been included: R5-083051: LTE E-UTRAN RRC_IDLE State Mobility text proposal R5-083052: LTE E-UTRAN RRC_CONNECTED State Mobility text proposal R5-083053: LTE UE Transmit Timing Requirements text proposal R5-083054: LTE UE Measurement Procedures text proposal R5-083813: LTE UE Measurement Performance Requirements text proposal R5-083138: Text proposal for LTE E-UTRAN Cell Re-selection to HRPD or to cdma2000 1xRTT in TS 36.521-3 R5-083056: RRC Connection Mobility Control text proposal R5-083164: LTE-RF 36-521-3 after RAN5#40 Editorial restructuring to section 4	0.2.0	0.3.0
2008-10	RAN5#40Bis	R5-084073			Following approved TPs have been included: R5-084073: TS 36.521-3 after RAN5#40Bis R5-084079: LTE Cell Re-Selection text proposal R5-084322: LTE FDD/FDD Handover for intra/inter frequency text proposal	0.3.0	0.4.0
2008-11	RAN5#41	R5-085084			Following approved TPs have been included: R5-085084 LTE-RF: TS 36.521-3 after RAN5#41 R5-085718 LTE RRM Cell Re-Selection text proposal R5-085719 LTE RRM FDD/FDD Handover for intra/inter frequency text proposal R5-085720 E-UTRAN FDD intra-frequency measurements text proposal R5-085740 RSRQ Accuracy Measurement Performance Requirements text proposal R5-085722 Text Proposal for Cell Configuration mapping annex in 36.521-3 Editor's cleanup	0.4.0	0.5.0
2009-01	RAN5#41Bis	R5-086067			Following approved TPs have been included: R5-086067 LTE-RF: TS 36.521-3 after RAN5#41Bis R5-086149 References to connection diagrams R5-086418 LTE RRM Cell Re-Selection text proposal R5-086095 Cell configuration reference correction for RRM tests in 36.521-3 section 3A.3 R5-086419 LTE RRM FDD/FDD Handover for intra/inter frequency text proposal R5-086420 E-UTRAN FDD intra-frequency measurements text proposal R5-086431 RSRQ Accuracy Measurement Performance Requirements text proposal R5-086082 LTE UE Transmit Timing Requirements text proposal R5-086422 Text proposal for RSRP measurement accuracy test cases R5-086432 E-UTRAN FDD- FDD Inter-Frequency Measurements text proposal	0.5.0	0.6.0

			R5-086142 Measurement Reference Channels and OCNG for RRM testing R5-086150 Statistical testing in RRM tests Editor's cleanup		
2009-03	RAN5#42	R5-090191	Following approved TPs have been included: R5-091026 TDD Intra frequency RSRQ Accuracy R5-091035 TDD Inter frequency RSRQ Accuracy R5-091035 LTE RRM FDD/FDD Handover for intra/inter frequency text proposal R5-091047 E-UTRAN FDD intra-frequency measurements text proposal R5-091049 RSTQ Accuracy Measurement Performance Requirements text proposal R5-091041 LTE RRM E-UTRA FDD to GSM Cell Re-Selection text proposal R5-091040 LTE RRM E-UTRA FDD to GSM Handover text proposal R5-091040 LTE RRM E-UTRA FDD to GSM Handover text proposal R5-091048 LTE RRM E-UTRA FDD to UTRA FDD Cell Search text proposal R5-091048 LTE RRM E-UTRA FDD to UTRA FDD Cell Search text proposal R5-091048 LTE UE inter-RAT Handover Structure text proposal R5-091053 LTE UE Transmit Timing Requirements text proposal R5-091053 LTE UE Transmit Timing Requirements text proposal R5-091053 LTE UE Transmit Timing Requirements text proposal R5-091091 I.TE-RF: TS 36.521-3 after RAN5#42 R5-091091 Intra-frequency cell search TDD R5-091098 Intra-frequency RSRP measurement accuracy TDD R5-091081 Intra-frequency RSRP absolute accuracy TDD R5-091083 Inter-frequency RSRP absolute accuracy TDD R5-091083 Inter-frequency RSRP absolute accuracy TDD R5-091085 Text Proposal for RSRP Measurement Accuracy test cases R5-091076 Text Proposal for Annex C of TS 36.521-3 R5-091043 TP of E-UTRAN TDD & TDD inter frequency handover test case R5-091034 TP of E-UTRAN TDD & TDD intra frequency handover test case R5-091044 TP of E-UTRAN TDD & TDD intra frequency handover test case R5-091045 TP of E-UTRAN TDD & UTRAN TDD cell re- selection test case R5-091045 TP of E-UTRAN TDD & TDD intra frequency handover test case R5-091045 TP of E-UTRAN TDD & TDD intra frequency handover test case R5-091045 TP of E-UTRAN TDD TDD Inter-frequency Measurements text proposal R5-091049 E-UTRAN TDD FDD Inter-Frequency Measurements text proposal R5-091040 E-UTRAN TDD TDD Inter-Frequency Measurements text proposal R5-091042 LTE RRM Cell Re-Selection text proposal	0.6.0	1.0.0
2009-03	RAN5#42Bis		Editor's cleanup R5-091263 LTE-RRM Cell Re-Selection text proposal R5-091922 LTE-RRM E-UTRA FDD to GSM Cell Re-Selection text proposal R5-091923 LTE-RRM E-UTRA FDD - UTRA TDD Cell Re- Selection text proposal R5-091924 TP of E-UTRA TDD - GSM cell reselection R5-091945 TP of E-UTRA TDD-UTRAN TDD cell re-selection: UTRA is of higher priority R5-091926 TP of E-UTRA TDD - UTRA TDD cell reselection: UTRA is of lower priority test case R5-091264 LTE-RRM FDD/FDD Handover for intra/inter frequency text proposal R5-091931 LTE-RRM E-UTRA FDD to GSM Handover text proposal R5-091928 LTE-RRM E-UTRA FDD to UTRA FDD Handover	1.0.0	1.1.0

			_ _	1	
			R5-091946 LTE-RRM: E-UTRA TDD to UTRA FDD Handover		
			text proposal R5-091947 LTE-RRM: Handover test proposal		
			R5-091930 TP of E-UTRA TDD to UTRA TDD handover test		
			case		
			R5-091265 LTE-RRM E-UTRAN FDD intra-frequency		
			measurements text proposal R5-091266 LTE-RRM RSRQ Accuracy Measurement		
			Performance Requirements text proposal		
			R5-091932 LTE-RRM E-UTRA FDD to UTRA FDD Cell Search		
			(fading) text proposal		
			R5-091933 LTE-RRM E-UTRAN FDD & UE Transmit Timing Accuracy text proposal		
			R5-091276 LTE-RRM E-UTRAN FDD & UE Timing Advance		
			Adjustment Accuracy text proposal		
			R5-091934 LTE-RRM: E-UTRA TDD to UTRA FDD Cell		
			Search (fading) text proposal		
			R5-091935 LTE-RRM E-UTRAN TDD & UE Transmit Timing Accuracy text proposal		
			R5-091936 LTE-RRM E-UTRAN TDD & UE Timing Advance		
			Adjustment Accuracy text proposal		
			R5-091937 LTE-RRM E-UTRA FDD to UTRA TDD Cell Search		
			(fading) text proposal R5-091381 EUTRAN TDD to UTRAN TDD cell search (fading)		
			R5-091386 LTE RRM TDD Inter Frequency RSRP Accuracy		
			text proposal		
			R5-091398 Text Proposal for RSRP Measurement Accuracy		
			test cases		
			R5-091948 LTE-RRM: Measurements test proposal R5-091431 RRM-EUTRAN FDD RLM test for out-of-sync		
			R5-091434 RRM-EUTRAN TDD RLM test for out-of-sync		
			R5-091435 RRM-EUTRAN FDD RLM test for In-sync		
			R5-091436 RRM-EUTRAN TDD RLM test for In-sync R5-091468 RRM E-UTRAN FDD-FDD Inter-frequency		
			Measurements		
			R5-091469 RRM E-UTRAN TDD-TDD Inter-frequency		
			Measurements		
			R5-091939 LTE-RRM cell configuration mapping updates R5-091407 Update of statistical requirements to 36.521-3		
			Editor's cleanup		
2009-05	RAN5#43	R5-092156		1.1.0	2.0.0
			R5-092066 E-UTRAN FDD- FDD Inter-Frequency		
			Measurements text proposal R5-092617 RRM E-UTRAN TDD-TDD Inter-frequency		
			Measurement		
			R5-092068 RRM-EUTRAN FDD RLM test for out-of-sync and		
			in-synch		
			R5-092069 RRM-EUTRAN TDD RLM test for out-of-sync and in-synch		
			R5-092071 Reference measurement Channels for Radio Link		
			Monitoring Tests with 2 Antennas		
			R5-092127 Update of statistical requirements to 36.521-3		
			R5-092630 LTE RRM: 1→2 RX antenna R5-092618 Text Proposal for E-UTRAN FDD-UTRAN FDD cell		
			re-selection test cases		
			R5-092651 Text Proposal for E-UTRAN FDD - GSM		
			Measurements test case		
			R5-092620 LTE-RRM E-UTRA TDD to GSM event triggered reporting in AWGN text proposal		
			R5-092360 LTE RRM TDD Inter Frequency RSRP Accuracy		
			text proposal		
			 R5-092621 LTE-RRM Default Message Contents for support of		
			RRM text proposal		
			RRM text proposal R5-092384 LTE-RRM Update of Message Contents for E- UTRAN FDD RRM tests to align with support of RRM text proposal		
			RRM text proposal R5-092384 LTE-RRM Update of Message Contents for E- UTRAN FDD RRM tests to align with support of RRM text proposal R5-092622 LTE-RRM E-UTRAN FDD Cell Re-Selection text		
			RRM text proposal R5-092384 LTE-RRM Update of Message Contents for E- UTRAN FDD RRM tests to align with support of RRM text proposal R5-092622 LTE-RRM E-UTRAN FDD Cell Re-Selection text proposal		
			RRM text proposal R5-092384 LTE-RRM Update of Message Contents for E- UTRAN FDD RRM tests to align with support of RRM text proposal R5-092622 LTE-RRM E-UTRAN FDD Cell Re-Selection text		
			RRM text proposal R5-092384 LTE-RRM Update of Message Contents for E- UTRAN FDD RRM tests to align with support of RRM text proposal R5-092622 LTE-RRM E-UTRAN FDD Cell Re-Selection text proposal R5-092386 LTE-RRM FDD Inter Frequency RSRQ Accuracy Measurement Performance Requirements text proposal R5-092387 LTE-RRM E-UTRA FDD to GSM Cell Re-Selection		
			RRM text proposal R5-092384 LTE-RRM Update of Message Contents for E-UTRAN FDD RRM tests to align with support of RRM text proposal R5-092622 LTE-RRM E-UTRAN FDD Cell Re-Selection text proposal R5-092386 LTE-RRM FDD Inter Frequency RSRQ Accuracy Measurement Performance Requirements text proposal R5-092387 LTE-RRM E-UTRA FDD to GSM Cell Re-Selection text proposal		
			RRM text proposal R5-092384 LTE-RRM Update of Message Contents for E-UTRAN FDD RRM tests to align with support of RRM text proposal R5-092622 LTE-RRM E-UTRAN FDD Cell Re-Selection text proposal R5-092386 LTE-RRM FDD Inter Frequency RSRQ Accuracy Measurement Performance Requirements text proposal R5-092387 LTE-RRM E-UTRA FDD to GSM Cell Re-Selection text proposal R5-092623 LTE-RRM E-UTRAN FDD intra frequency cell		
			RRM text proposal R5-092384 LTE-RRM Update of Message Contents for E-UTRAN FDD RRM tests to align with support of RRM text proposal R5-092622 LTE-RRM E-UTRAN FDD Cell Re-Selection text proposal R5-092386 LTE-RRM FDD Inter Frequency RSRQ Accuracy Measurement Performance Requirements text proposal R5-092387 LTE-RRM E-UTRA FDD to GSM Cell Re-Selection text proposal R5-092623 LTE-RRM E-UTRAN FDD intra frequency cell search (fading) in long DRX text proposal R5-092624 LTE-RRM E-UTRAN FDD intra frequency cell		
			RRM text proposal R5-092384 LTE-RRM Update of Message Contents for E-UTRAN FDD RRM tests to align with support of RRM text proposal R5-092622 LTE-RRM E-UTRAN FDD Cell Re-Selection text proposal R5-092386 LTE-RRM FDD Inter Frequency RSRQ Accuracy Measurement Performance Requirements text proposal R5-092387 LTE-RRM E-UTRA FDD to GSM Cell Re-Selection text proposal R5-092623 LTE-RRM E-UTRAN FDD intra frequency cell search (fading) in long DRX text proposal		

•	1		1		[A	1	1
					Accuracy text proposal R5-092626 LTE-RRM E-UTRAN FDD random access:		
					contention based scenario text proposal		
					R5-092627 LTE-RRM E-UTRAN FDD random access: non-		
					contention based scenario text proposal		
					R5-092628 LTE-RRM E-UTRA FDD to HRPD Handover text proposal		
					R5-092629 LTE-RRM E-UTRA FDD to cdma2000 1xRTT		
					Handover text proposal		
					R5-092443 Addition of band 18 and 19 to LTE RRM test cases		
					Editor's cleanup		
2009-05	RAN#44	-	-		Updated to v8.0.0 after RAN#44 with no technical change.	2.0.0	8.0.0
2009-06	-	-	-		Editorial clean up	8.0.0	8.0.1
2009-09	RAN#45	R5-094036	0001	-	Correction CR to 36.521-3: Update of Requirements for E- UTRAN (FDD) cell re-selection tests	8.0.1	8.1.0
2009-09	RAN#45	R5-094037	0002	-	Correction CR to 36.521-3: Update of Requirements for E- UTRAN FDD - FDD Inter Frequency Handover test	8.0.1	8.1.0
2009-09	RAN#45	R5-094038	0003	-	Correction CR to 36.521-3: Update of Requirements for E- UTRAN FDD - FDD Intra Frequency Cell Search test	8.0.1	8.1.0
2009-09	RAN#45	R5-094039	0004	-	Correction CR to 36.521-3: Update of Requirements for E-	8.0.1	8.1.0
2009-09	RAN#45	R5-094040	0005		UTRAN FDD - UE transmit timing accuracy test Correction CR to 36.521-3: Update of Requirements for E-	8.0.1	8.1.0
					UTRAN FDD - GSM cell re-selection test		
2009-09	RAN#45	R5-094041	0006	-	Correction CR to 36.521-3: Update of Requirements conditions	8.0.1	8.1.0
					for E-UTRAN FDD - UE timing advance adjustment accuracy test		
2009-09	RAN#45	R5-094042	0007	<u> </u> -	Correction CR to 36.521-3: Update of Requirements for E-	8.0.1	8.1.0
		DE 004040			UTRAN FDD - GSM Handover test		0.4.0
2009-09	RAN#45	R5-094043	8000	-	Correction CR to 36.521-3: Update of Requirements for E- UTRAN FDD - UTRAN FDD Handover test	8.0.1	8.1.0
2009-09	RAN#45	R5-094045	0009	-	Correction CR to 36.521-3: Update of Requirements for E- UTRAN FDD - GSM Cell Search test	8.0.1	8.1.0
2009-09	RAN#45	R5-094047	0010	-	Correction CR to 36.521-3: Update of Requirements for E- UTRAN FDD - Contention Based Random Access test	8.0.1	8.1.0
2009-09	RAN#45	R5-094048	0011	-	Correction CR to 36.521-3: Update of Requirements for E-	8.0.1	8.1.0
2009-09	RAN#45	R5-094049	0012	-	UTRAN FDD - Non-Contention Based Random Access test Addition of test scenario CR to 36.521-3: E-UTRAN FDD-FDD	8.0.1	8.1.0
					Inter-frequency cell search when DRX is used under fading propagation conditions		
2009-09	RAN#45	R5-094050	0013	1-	Correction CR to 36.521-3: Update of E-UTRAN FDD-FDD	8.0.1	8.1.0
					Intra-frequency cell search when DRX is used under fading		
2009-09	RAN#45	R5-094051	0014		propagation conditions Correction CR to 36.521-3: Update of Annex H Default	8.0.1	8.1.0
2009-09	KAIN#43	K5-094051	0014	-	Message Contents for support of RRM	6.0.1	0.1.0
2009-09	RAN#45	R5-094217	0015	1-	Update for E-UTRA FDD - UTRA TDD cell reselection	8.0.1	8.1.0
2009-09	RAN#45	R5-094218	0016	-	Test proposal for E-UTRA FDD - UTRA TDD HO	8.0.1	8.1.0
2009-09	RAN#45	R5-094219	0017	-	Test proposal for E-UTRA TDD random access: contention	8.0.1	8.1.0
0000.00	DANIJAE	DE 00 1000	0040		based scenario	0.04	8.1.0
2009-09	RAN#45	R5-094220	0018	-	Test proposal for E-UTRA TDD random access: non- contention based scenario	8.0.1	8.1.0
2009-09	RAN#45	R5-094221	0019	 -	Update for TDD Intra-frequency RSRQ measurement accuracy	8.0.1	8.1.0
2009-09	RAN#45	R5-094222	0020	-	Update for TDD Inter-frequency RSRQ measurement accuracy	8.0.1	8.1.0
2009-09	RAN#45	R5-094223	0021	-	Update for E-UTRAN TDD Transmit timing accuracy	8.0.1	8.1.0
2009-09	RAN#45	R5-094225	0022	-	Update for E-UTRA FDD - UTRA TDD cell search(fading)	8.0.1	8.1.0
2009-09	RAN#45	R5-094253	0023	-	CR to 36.521-3: Addition of E-UTRAN FDD Intra-frequency RRC Re-establishment	8.0.1	8.1.0
2009-09	RAN#45	R5-094254	0024	-	CR to 36.521-3: Addition of E-UTRAN FDD Inter-frequency RRC Re-establishment	8.0.1	8.1.0
2009-09	RAN#45	R5-094285	0025	+	LTE-RRM: Introduction of Common Exception messages table	8.0.1	8.1.0
					for E-UTRAN TDD-UTRAN FDD handover and E-UTRAN TDD-UTRAN FDD measurements		
2009-09	RAN#45	R5-094358	0026	+-	Correction to RSRP measurement accuracy test cases	8.0.1	8.1.0
2009-09	RAN#45	R5-094442	0027	-	CR to 36.521-3: Update of E-UTRA FDD to HRPD Handover and E-UTRA FDD to cdma2000 1xRTT Handover test cases	8.0.1	8.1.0
2009-09	RAN#45	R5-094709	0028	1_	LTE RRM: Correction to test cases 4.4.1 and 4.4.2	8.0.1	8.1.0
2009-09	RAN#45	R5-094713	0029	-	Resubmission - Update to E-UTRAN to HRPD Cell Re-	8.0.1	8.1.0
					Selection (HRPD is of lower priority) test case		
2009-09	RAN#45	R5-094720	0030	-	Resubmission - Update to E-UTRAN to CDMA2000 1xRTT Cell Re-Selection (CDMA2000 1xRTT is of lower priority) test	8.0.1	8.1.0
•			1		case		
		10 - 00 1- 10	10024	1	RRM TCs in test mode	8.0.1	8.1.0
2009-09	RAN#45	R5-094743	0031	-			
2009-09 2009-09	RAN#45 RAN#45	R5-094743 R5-094927	0031	-	Correction CR to 36.521-3: Update of inter-frequency E- UTRAN TDD-TDD cell re-selection 4.2.6	8.0.1	8.1.0

					UTRAN TDD cell re-selection 4.3.4		
2009-09	RAN#45	R5-094929	0034	-	Correction CR to 36.521-3: Update of Requirements for E- UTRAN FDD - UTRAN FDD cell re-selection test	8.0.1	8.1.0
2009-09	RAN#45	R5-094930	0035	-	LTE-RRM: Addition of common messages to Annex H	8.0.1	8.1.0
2009-09	RAN#45	R5-094931	0036	-	Test Proposal for E-UTRAN TDD Intra-frequency RRC Re- establishment	8.0.1	8.1.0
2009-09	RAN#45	R5-094932	0037	-	Test Proposal for E-UTRAN TDD Inter-frequency RRC Re- establishment	8.0.1	8.1.0
2009-09	RAN#45	R5-094933	0038	-	Update for E-UTRAN TDD Timing advanced adjustment accuracy	8.0.1	8.1.0
2009-09	RAN#45	R5-094934	0039	-	Correction CR to 36.521-3: Update of Requirements for E- UTRAN FDD - UTRAN FDD Cell Search test	8.0.1	8.1.0
2009-09	RAN#45	R5-094935	0040	Ī-	E-UTRA TDD - TDD Intra frequency cell search with DRX	8.0.1	8.1.0
2009-09	RAN#45	R5-094936	0041	-	TDD - TDD RSRP measurement	8.0.1	8.1.0
2009-09	RAN#45	R5-094937	0042	-	Update 8.10.1 E-UTRAN TDD-GSM event triggered reporting in AWGN	8.0.1	8.1.0
2009-09	RAN#45	R5-094938	0043	-	Add new tc 8.10.2 EUTRAN TDD-GSM cell search with DRX	8.0.1	8.1.0
2009-09	RAN#45	R5-094939	0044	-	Add new tc 8.7.2 EUTRAN TDD - UTRAN TDD cell search with DRX	8.0.1	8.1.0
2009-09	RAN#45	R5-094940	0045	-	E-UTRA TDD - TDD Inter frequency cell search with DRX	8.0.1	8.1.0
2009-09	RAN#45	R5-094942	0046	1-	Update to Annex E Cell Configuration Mapping	8.0.1	8.1.0
2009-09	RAN#45	R5-094967	0047	1-	RRM Radio Link Monitoring FDD update	8.0.1	8.1.0
2009-09	RAN#45	R5-094968	0048	1-	RRM Radio Link Monitoring TDD update	8.0.1	8.1.0
2009-09	RAN#45	R5-094969	0050	1_	RRM: E-UTRAN FDD - UTRAN FDD SON ANR cell search	8.0.1	8.1.0
2009-09	RAN#45	R5-094909	0050	-	reporting CR to 36.521-3:Message updates for RSRP and RSRQ	8.0.1	8.1.0
				<u> </u>	Accuracy measurement		
2009-09	RAN#45	R5-094971	0052	+	RRM OCNG and RMC update	8.0.1	8.1.0
2009-09	RAN#45	R5-094972	0053	-	RRM: Update of Annex E for SON	8.0.1	8.1.0
2009-12	RAN#46	R5-095492	0054	-	Removal of test state 4 in RRM test cases	8.1.0	8.2.0
2009-12	RAN#46	R5-095493	0055	-	CR to 36.521-3 Annexes of E-UTRAN cell reselection test cases	8.1.0	8.2.0
2009-12	RAN#46	R5-095499	0056	-	CR for E-UTRAN FDD - UTRAN TDD handover	8.1.0	8.2.0
2009-12	RAN#46	R5-095501	0057	-	CR for E-UTRAN TDD - UE Transmit Timing Accuracy	8.1.0	8.2.0
2009-12	RAN#46	R5-095503	0058	-	CR for E-UTRAN FDD - UTRAN TDD event triggered reporting under fading propagation conditions	8.1.0	8.2.0
2009-12	RAN#46	R5-095504	0059	-	Correction to TDD RSRP and RSRQ measurement requirements	8.1.0	8.2.0
2009-12	RAN#46	R5-095527	0060	-	Correction CR to 36.521-3: E-UTRAN FDD - FDD cell re- selection intra frequency case and inter frequency case conformance minimum requirements updates	8.1.0	8.2.0
2009-12	RAN#46	R5-095528	0061	=	· · · · · · · · · · · · · · · · · · ·	8.1.0	8.2.0
2009-12	RAN#46	R5-095529	0062	-	Correction CR to 36.521-3: E-UTRAN FDD - FDD Inter Frequency event triggered reporting under fading propagation conditions in asynchronous cells case	8.1.0	8.2.0
2009-12	RAN#46	R5-095530	0063	-	Correction CR to 36.521-3: E-UTRAN FDD - FDD Inter Frequency event triggered reporting when DRX is used under fading propagation conditions	8.1.0	8.2.0
2009-12	RAN#46	R5-095531	0064	-	Correction CR to 36.521-3: E-UTRAN FDD - FDD Intra Frequency event triggered reporting under fading propagation conditions	8.1.0	8.2.0
2009-12	RAN#46	R5-095537	0065	-	Correction CR to 36.521-3: E-UTRAN FDD - UE Transmit Timing Accuracy case	8.1.0	8.2.0
2009-12	RAN#46	R5-095538	0066	ŀ	Correction CR to 36.521-3: E-UTRAN FDD - FDD inter frequency event triggered reporting when DRX is used	8.1.0	8.2.0
2009-12	RAN#46	R5-095557	0067	-	Correction CR to 36.521-3: General RRM Updates	8.1.0	8.2.0
2009-12	RAN#46	R5-095572	0068	-	Update TC 8.7.2 E-UTRAN TDD - UTRAN TDD cell search when DRX is used under fading propagation conditions	8.1.0	8.2.0
2009-12	RAN#46	R5-095573	0069	-	Update TC 8.10.2 E-UTRAN TDD - GSM event triggered reporting when DRX is used in AWGN	8.1.0	8.2.0
2009-12	RAN#46	R5-095576	0070	-	Update TC 8.2.1 E-UTRAN TDD - TDD intra-frequency event triggered reporting under fading propagation conditions in synchronous cells	8.1.0	8.2.0
2009-12	RAN#46	R5-095591	0071	1-	update of Annex H.2.3 in 36.521-3	8.1.0	8.2.0
2009-12	RAN#46	R5-095741	0072	-	CR to the inconsistent expression in UE Measurements Procedures	8.1.0	8.2.0
2009-12	RAN#46	R5-095917	0073	1-	Update: Radio Link Monitoring test cases: no DRX	8.1.0	8.2.0
2009-12	RAN#46	R5-096145	0073	†	Correction CR to 36.521-3: E-UTRAN FDD - FDD Inter Frequency Absolute RSRP Accuracy case	8.1.0	8.2.0
2009-12	RAN#46	R5-096243	0075	†	Update to RRM TC:E-UTRAN FDD - UTRAN TDD cell re- selection	8.1.0	8.2.0
	RAN#46	R5-096244	0104	1	Addition of new TC to 36.521-3: E-UTRAN TDD - UTRAN FDD	 	8.2.0

2009-12 2009-12	RAN#46 RAN#46	R5-096246	0105	1	Modification of section 4.2.2 in 36.521-3	8.1.0	8.2.0
		R5-096247	0106		Modification of section 4.2.2 in 36.521-3	8.1.0	8.2.0
2009-12	RAN#46	R5-096255	0076	F	CR to the RA response window's name in Random Access conformance requirements	8.1.0	8.2.0
2009-12	RAN#46	R5-096257	0077	-	Addition of test scenario CR to 36.521-3: E-UTRAN FDD - UTRAN FDD cell re-selection in fading propagation conditions: UTRA FDD is of lower priority	8.1.0	8.2.0
2009-12	RAN#46	R5-096258	0078	1	Addition of new TC to 36.521-3:E-UTRAN TDD - GSM Handover: Unknown Target Cell	8.1.0	8.2.0
2009-12	RAN#46	R5-096263	0079	1	Add new TC 5.1.6 E-UTRAN TDD - TDD inter frequency handover: unknown target cell	8.1.0	8.2.0
2009-12	RAN#46	R5-096265	0800	-	CR to 36.521-3: Update of E-UTRA FDD to HRPD Handover and E-UTRA FDD to cdma2000 1xRTT Handover test cases	8.1.0	8.2.0
2009-12	RAN#46	R5-096267	0081	-	Addition of test scenario CR to 36.521-3: E-UTRAN FDD - GSM Cell Search when DRX is used	8.1.0	8.2.0
2009-12	RAN#46	R5-096268	0082	-	Addition of test scenario CR to 36.521-3: E-UTRAN FDD - UTRAN FDD Cell Search when DRX is used	8.1.0	8.2.0
2009-12	RAN#46	R5-096269	0083	-	RRM: Update of test case 8.4.1 TDD inter-frequency event triggered reporting	8.1.0	8.2.0
2009-12	RAN#46	R5-096271	0084	-	LTE-RF: Update to Annex E Cell Configuration Mapping	8.1.0	8.2.0
2009-12	RAN#46	R5-096272	0085	-	Correction CR to 36.521-3: Addition of message contents exceptions for E-UTRAN inter frequency and inter-RAT Cell Search for when DRX is used	8.1.0	8.2.0
2009-12	RAN#46	R5-096273	0086	-	Correction CR to 36.521-3: E-UTRAN FDD - UTRA FDD Handover case	8.1.0	8.2.0
2009-12	RAN#46	R5-096274	0087	Ŀ	CR to 36.521-3: Update to FDD Intra-frequency RRC Reestablishment test case	8.1.0	8.2.0
2009-12	RAN#46	R5-096275	8800	-	CR to 36.521-3: Update to FDD Inter-frequency RRC Re- establishment test case	8.1.0	8.2.0
2009-12	RAN#46	R5-096276	0107	-	Test Case of E-UTRAN TDD to GSM Handover	8.1.0	8.2.0
2009-12	RAN#46	R5-096296	0089	-	Update TC 8.7.1 E-UTRAN TDD - UTRAN TDD event	8.1.0	8.2.0
2009-12	RAN#46	R5-096302	0090		triggered reporting under fading propagation conditions Correction CR to 36.521-3: E-UTRAN FDD - GSM event	8.1.0	8.2.0
2009-12	KAN#40	R5-096302	0090	-	triggered reporting in AWGN case	8.1.0	0.2.0
2009-12	RAN#46	R5-096303	0091	-	Addition of new TC to 36.521-3: E-UTRAN TDD to E-UTRAN TDD and UTRA TDD cell search test case	8.1.0	8.2.0
2009-12	RAN#46	R5-096310	0092	-	Addition of test scenario CR to 36.521-3: E-UTRAN FDD - UTRAN FDD Handover: Unknown Target Cell	8.1.0	8.2.0
2009-12	RAN#46	R5-096324	0093	-	Addition of new TC to 36.521-3 E-UTRAN TDD - UTRAN TDD HO test: unknown target cell	8.1.0	8.2.0
2009-12	RAN#46	R5-096325	0094	-	Addition of test scenario CR to 36.521-3: E-UTRAN FDD - FDD inter frequency Handover test cases: Unknown Target Cell	8.1.0	8.2.0
2009-12	RAN#46	R5-096326	0095	-	Addition of test scenario CR to 36.521-3: E-UTRAN FDD - GSM Handover: Unknown Target Cell	8.1.0	8.2.0
2009-12	RAN#46	R5-096327	0096	-	Addition of new TC to 36.521-3: E-UTRAN TDD - E-UTRAN TDD and E-UTRAN TDD Inter-frequency event triggered reporting under fading propagation conditions test case	8.1.0	8.2.0
2009-12	RAN#46	R5-096328	0097	-	E-UTRAN FDD Radio Link Monitoring test for Out-of-sync in DRX	8.1.0	8.2.0
2009-12	RAN#46	R5-096329	0098	-	E-UTRAN FDD Radio Link Monitoring test for in-sync in DRX	8.1.0	8.2.0
2009-12	RAN#46	R5-096330	0099	-	E-UTRAN TDD Radio Link Monitoring test for Out-of-sync in DRX	8.1.0	8.2.0
2009-12	RAN#46	R5-096331	0100	-	E-UTRAN TDD Radio Link Monitoring test for in-sync in DRX	8.1.0	8.2.0
2009-12	RAN#46	R5-096332	0101	-	RRM: Update of test case 8.3.1 FDD inter-frequency event triggered reporting	8.1.0	8.2.0
2009-12	RAN#46	R5-096337	0102	1	Correction CR to 36.521-3: E-UTRAN FDD - FDD Handover intra frequency and inter frequency case	8.1.0	8.2.0
2009-12	RAN#46	R5-096340	0103	1	Introduction of uncertainties for RRM test cases 4.2.1 and 4.2.2	8.1.0	8.2.0
2010-03	RAN#47	R5-100130	0108	1	Test Tolerances and alignment with 36.133 for cell re-selection intra frequency cases		8.3.0
2010-03	RAN#47	R5-100132	0109	1	Uncertainties and Test Tolerances for inter frequency cell re- selection	8.2.0	8.3.0
2010-03	RAN#47	R5-100135	0110	-	Clarification of Extreme conditions for RSRP test cases	8.2.0	8.3.0
2010-03	RAN#47	R5-100362	0113	-	CR about the Cell Search Requirements for LTE FDD-FDD/ TDD-TDD Handover to Unknown Target Cell CR on updating the handover delay requirements for E-	8.2.0	8.3.0
2010-03		R5-100365		-	UTRAN TDD - TDD both intra-frequency and inter-frequency handovers		
2010-03	RAN#47	R5-100367	0115		CR to correct the test requirements of reselection from E-	8.2.0	8.3.0

			1	1	messages	<u> </u>	1
2010-03	RAN#47	R5-100401	0117	-	RRM Inter frequency cell search updates, TC 8.3.1 and 8.4.1	8.2.0	8.3.0
2010-03	RAN#47	R5-100438	0118	-	Update TC 8.7.1, 8.9.1 and 8.11.4	8.2.0	8.3.0
2010-03	RAN#47	R5-100460	0119	-	Misc update on 521-3	8.2.0	8.3.0
2010-03	RAN#47	R5-100486	0120	-	CR to 36.521-3: Addition of E-UTRA FDD to HRPD Handover: Unknown Target Cell and E-UTRA FDD to cdma2000 1xRTT	8.2.0	8.3.0
					Handover: Unknown Target Cell test cases		
2010-03	RAN#47	R5-100519	0121	-	Correction to RSRP Accuracy test cases	8.2.0	8.3.0
2010-03	RAN#47	R5-100546	0122	-	CR to 36.521-3: Update to E-UTRAN FDD RRC Reestablishment test cases	8.2.0	8.3.0
2010-03	RAN#47	R5-100562	0123	-	CR to 36.521-3: Update LTE RRM test cases with test requirements for extended LTE1500	8.2.0	8.3.0
2010-03	RAN#47	R5-100714	0124	-	Addition of missing Es/Noc parameters in RRM test cases	8.2.0	8.3.0
2010-03	RAN#47	R5-100715	0125	-	Correction to GSM measurement configuration in Annex H.3.1	8.2.0	8.3.0
2010-03	RAN#47	R5-100716	0126	-	Update on Annex C for 36.521-3	8.2.0	8.3.0
2010-03	RAN#47	R5-100849	0127	-	Text on exclusion of extra delay due to RRC retransmission	8.2.0	8.3.0
2010-03	RAN#47	R5-100850	0128	-	Correction to test iteration procedure in cell re-selection TCs	8.2.0	8.3.0
2010-03	RAN#47	R5-100852	0129	-	DL Mac Padding for RRM TCs	8.2.0	8.3.0
2010-03	RAN#47	R5-100853	0130	-	Update TC 5.1.6 E-UTRAN TDD-TDD inter frequency handover unknown target cell	8.2.0	8.3.0
2010-03	RAN#47	R5-100854	0131	1-	New RRM test case, 8.7.3 E-UTRAN TDD SON ANR	8.2.0	8.3.0
2010-03	RAN#47	R5-100859	0132	-	Update TC 8.2.2 E-UTRAN TDD-TDD intra-frequency event triggered reporting under fading propagation conditions in	8.2.0	8.3.0
2010-03	RAN#47	R5-100860	0133	-	synchronous cells with DRX Update TC 8.2.1 E-UTRAN TDD-TDD intra-frequency event triggered reporting under fading propagation conditions in	8.2.0	8.3.0
2010-03	RAN#47	R5-100861	0134	-	synchronous cells Update TC 8.4.2 E-UTRAN TDD-TDD Inter-frequency event triggered reporting when DRX is used under fading	8.2.0	8.3.0
					propagation conditions in synchronous cells		
2010-03	RAN#47	R5-100862	0135	-	Misc update on test applicability	8.2.0	8.3.0
2010-03	RAN#47	R5-100865	0136	-	CR about corrections of PDSCH Reference Measurement Channels	8.2.0	8.3.0
2010-03	RAN#47	R5-100866	0137	-	CR about OFDMA Channel Noise Generator (OCNG)	8.2.0	8.3.0
2010-03	RAN#47	R5-100873	0138	-	CR to 36.521-3 Rel-8 Introduction of E-UTRAN FDD - FDD Intra Frequency Cell Search with DRX when L3 filtering is used	8.2.0	8.3.0
2010-03	RAN#47	R5-100890	0139	1-	Update to RRM TC: TDD Intra frequency RSRP Accuracy	8.2.0	8.3.0
2010-03	RAN#47	R5-100896	0140	1_	Clarification on Time offset between cells	8.2.0	8.3.0
2010-03	RAN#47	R5-100897	0141	1	Update to RRM TC:E-UTRAN TDD-TDD cell re-selection	8.2.0	8.3.0
2010-03	RAN#47	R5-100898	0142	-	Update to RRM TC: TDD Inter frequency RSRP Accuracy	8.2.0	8.3.0
2010-03	RAN#47	R5-100900	0143	-	Uncertainties and Test Tolerances for FDD Intra Frequency Absolute RSRP Accuracy	8.2.0	8.3.0
2010-03	RAN#47	R5-100901	0144	-	RRM TTIdcch and cell timing change, update of chapter 8	8.2.0	8.3.0
2010-03	RAN#47	-	-	-	Moved to v9.0.0 with no change	8.3.0	9.0.0
2010-06	RAN#48	R5-103105	0145	-	CR to 36.521-3: Update RSRP test cases with band 11 and 21	9.0.0	9.1.0
2010-06	RAN#48	R5-103116	0146	-	Correction of CR conflict for Intra Frequency TDD reselection test	9.0.0	9.1.0
2010-06	RAN#48	R5-103117	0147	-	Reference to TR 36.903 in TS 36.521-3	9.0.0	9.1.0
2010-06	RAN#48	R5-103312	0149	-	Connection diagram for test 8.11.2 (3 cells)	9.0.0	9.1.0
2010-06	RAN#48	R5-103315	0150	-	Correction to connection diagram reference for test 8.10.1 and 8.10.2	9.0.0	9.1.0
2010-06	RAN#48	R5-103330	0151	-	update on test applicability	9.0.0	9.1.0
2010-06	RAN#48	R5-103358	0152	Ŀ	Annex E update	9.0.0	9.1.0
2010-06	RAN#48	R5-103496	0153	-	LTE-RRM: Update of test procedure for measurement performance test cases	9.0.0	9.1.0
2010-06	RAN#48	R5-103526	0154	-	CR 36.521-3 on corrections to requirements in Idle Mode	9.0.0	9.1.0
2010-06	RAN#48	R5-103528	0155	-	CR 36.521-3 on correction to InterRAT handover minimum requirements	9.0.0	9.1.0
2010-06	RAN#48	R5-103531	0156	-	CR 36.521-3 on correction to measurement requirements	9.0.0	9.1.0
2010-06	RAN#48	R5-103532	0157	-	CR 36.521-3 on correction to E-UTRA inter frequency cell search requirements	9.0.0	9.1.0
2010-06	RAN#48	R5-103534	0158	-	CR 36.521-3 on correction to UE transmit timing minimum and test requirements	9.0.0	9.1.0
2010-06	RAN#48	R5-103541	0159	-	Addition of test tolerances and system uncertainties for E- UTRAN FDD-FDD HO inter-frequency case	9.0.0	9.1.0
2010-06	RAN#48	R5-103546	0160	-	Addition of test tolerances and system uncertainties for E- UTRAN FDD-FDD intra frequency cell search under fading in asynchronous cells	9.0.0	9.1.0
2010-06	RAN#48	R5-103547	0161	-	Addition of test tolerances and system uncertainties for E- UTRAN FDD-FDD intra frequency cell search under fading in synchronous cells	9.0.0	9.1.0
2010-06	RAN#48	R5-103548	0162	1-	Addition of test tolerances and system uncertainties for E-	9.0.0	9.1.0

ı					UTRAN TDD-TDD intra frequency cell search under fading in		
0040.00	D 4 N I // 4 O	DE 400007	0400	-	synchronous cells	0.0.0	0.4.0
	RAN#48 RAN#48	R5-103607 R5-103608	0163 0164	+	Correction to step of physical cell identity change in 4.2.3 Correction of test mode reference to 36.508	9.0.0	9.1.0 9.1.0
	RAN#48	R5-103606	0165	+	Correction to the references of exceptional message	9.0.0	9.1.0
	RAN#48	R5-103612	0166	1-	Correction to the references of exceptional message Correction to b2-Threshold1 in the exceptional message	9.0.0	9.1.0
	RAN#48	R5-103613	0194	-	Correction to Radio Resource Configuration in UE transmit	9.0.0	9.1.0
2010 00	10.01111-10	100010	0104		timing and UE timing advance TCs	0.0.0	0.1.0
2010-06	RAN#48	R5-103614	0195	-	Correction to Gap Pattern Id in the exceptional message	9.0.0	9.1.0
2010-06	RAN#48	R5-103615	0196	-	Correction to Measure object and ID in the exceptional	9.0.0	9.1.0
					messages		
	RAN#48	R5-103658	0197	-	Iteration in cell reselection tests	9.0.0	9.1.0
	RAN#48	R5-103709	0167	-	Connection diagram reference for intra-freq measurement TCs		9.1.0
2010-06	RAN#48	R5-103724	0168	-	LTE-RRM:CR to E-UTRAN TDD RRC Re-establishment test cases	9.0.0	9.1.0
2010-06	RAN#48	R5-103734	0169	_	Test Tolerances and alignment for RLM FDD TC 7.3.1, 7.3.2	9.0.0	9.1.0
	RAN#48	R5-103736	0170	+	Uncertainties and Test Tolerances for Inter Frequency	9.0.0	9.1.0
2010 00	10 (14)/1-10	100700	0170		Absolute RSRP Accuracy	0.0.0	0.1.0
2010-06	RAN#48	R5-103737	0171	-	Uncertainties and Test Tolerances for TC 8.1.3 and 8.2.2	9.0.0	9.1.0
	RAN#48	R5-103738	0172	-	Uncertainties and Test Tolerances for TC 8.4.1 and 8.4.2	9.0.0	9.1.0
2010-06	RAN#48	R5-103739	0173	-		9.0.0	9.1.0
					cases (5.1.1 & 5.1.2)		
2010-06	RAN#48	R5-103740	0174	-	LTE-RRM:CR for Test Tolerances of inter-freq absolute RSRQ	9.0.0	9.1.0
					accuracy test cases (9.2.3.1 & 9.2.4.1)		
2010-06	RAN#48	R5-103741	0175	-	LTE-RRM:CR for Test Tolerances of inter-freq relative RSRQ	9.0.0	9.1.0
2040.00	D 4 N I # 4 O	DE 400740	0470	-	accuracy test cases (9.2.3.2 & 9.2.4.2)	0.00	0.4.0
2010-06	RAN#48	R5-103742	0176	-	Uncertainties and Test Tolerances for Inter Frequency Relative RSRP Accuracy	9.0.0	9.1.0
2010-06	RAN#48	R5-103743	0177	-	LTE-RRM: CR on Test Tolerances for TDD intra-freq absolute	9.0.0	9.1.0
2010 00	10.01111-10	100740	0177		RSRP accuracy Test	0.0.0	0.1.0
2010-06	RAN#48	R5-103744	0178	-	LTE-RRM: CR on Test Tolerances for TDD intra-freg relative	9.0.0	9.1.0
					RSRP accuracy Test case		
2010-06	RAN#48	R5-103745	0179	-	Addition of test tolerances and system uncertainties for E-	9.0.0	9.1.0
					UTRAN TDD-TDD HO inter-frequency case		
2010-06	RAN#48	R5-103746	0180	-	Additions to measurement uncertainties and Test Tolerances	9.0.0	9.1.0
					for E-UTRAN FDD-FDD and TDD-TDD HO inter-frequency		
2010-06	RAN#48	R5-103747	0181	L	case in Annex F Additions to measurement uncertainties and Test Tolerances	9.0.0	9.1.0
2010-00	IXAN#40	103747	0101	Ī	for E-UTRAN FDD-FDD and TDD-TDD intra frequency cell	9.0.0	9.1.0
					search in Annex F		
2010-06	RAN#48	R5-103748	0182	-	Addition of test tolerances and system uncertainties for FDD	9.0.0	9.1.0
					intra frequency absolute RSRQ accuracy		
2010-06	RAN#48	R5-103749	0183	-	Addition of test tolerances and system uncertainties for TDD	9.0.0	9.1.0
2212 22	D.4.1	D= 100==0			intra frequency absolute RSRQ accuracy		
2010-06	RAN#48	R5-103750	0184	-	Additions to measurement uncertainties and Test Tolerances	9.0.0	9.1.0
					for FDD and TDD intra frequency absolute RSRQ accuracy in Annex F		
2010-06	RAN#48	R5-103758	0185	+		9.0.0	9.1.0
2010 00	10.01111-10	100700	0100		in RRM test cases	0.0.0	0.1.0
2010-06	RAN#48	R5-103759	0186	-	Adding new test case 8.11.5 Combined E-UTRAN - EUTRAN	9.0.0	9.1.0
					FDD and GSM cell search		
2010-06	RAN#48	R5-103760	0187	-	Adding new test case 8.11.6 Combined E-UTRAN - EUTRAN	9.0.0	9.1.0
					TDD and GSM cell search.		ļ
2010-06	RAN#48	R5-103761	0188	-	Adding test case 8.7.3, 8.11.5, 8.11.6 to Annex E Cell	9.0.0	9.1.0
2010-06	RAN#48	R5-103769	0189		configuration mapping. Adding band 20, 800MHz in EU to TS36.521-3	9.0.0	9.1.0
	RAN#48	R5-103769	0190	-	Iteration in Handover and Re-establishment test cases	9.0.0	
	RAN#48	R5-103779	0190	1	LTE-RRM: Addition of new TC E-UTRAN FDD -UTRAN FDD	9.0.0	9.1.0 9.1.0
2010-00	IXAIN##O	103779	0131		CPICH Ec/No absolute accuracy	3.0.0	3.1.0
2010-06	RAN#48	R5-103783	0192	-	Correction to q-RxLevMin for E-UTRAN - GSM cell re-selection	9.0.0	9.1.0
	RAN#48	R5-103784	0145	1-	DL Mac Padding for RRM TCs	9.0.0	9.1.0
	RAN#48	R5-103105	0146	-	•	9.0.0	9.1.0
	RAN#48	R5-103116	0147	-	Correction of CR conflict for Intra Frequency TDD reselection	9.0.0	9.1.0
					test		
	RAN#48	R5-103117	0201	-	Reference to TR 36.903 in TS 36.521-3	9.0.0	9.1.0
2010-06	RAN#48	R5-103229n	0149	-	Removal of technical content in 36.521-3 v8.3.0 and	9.0.0	9.1.0
_5.5.00	RAN#48	DE 400040	0450	1	substitution with pointer to the next Release	0.0.0	0.4.0
		R5-103312	0150	-	Connection diagram for test 8.11.2 (3 cells)	9.0.0	9.1.0 9.1.0
2010-06 I		DE 400045					14 T ()
2010-06 I	RAN#48	R5-103315	0151	-	<u>-</u>	9.0.0	0.1.0
2010-06 2010-06	RAN#48			-	8.10.2		
2010-06 2010-06 2010-06		R5-103315 R5-103330 R5-103358	0151 0152 0153	- - -	<u>-</u>	9.0.0	9.1.0

2010-09	RAN#49	R5-104103	0199	L	Delay exclusion for retransmissions in RRM test cases	9.1.0	9.2.0
2010-09	RAN#49	R5-104103	0200	E	Expiry of contention resolution timer in Contention based	9.1.0	9.2.0
					PRACH test		
2010-09	RAN#49	R5-104160	0201	-	Uncertainties and Test Tolerances for FDD Intra Frequency Relative RSRP Accuracy section 9.1.1.2	9.1.0	9.2.0
2010-09	RAN#49	R5-104230	0202	-	Correction CR to 36.521-3: Update of E-UTRAN TDD-TDD cell re-selection intra frequency case 4.2.2	9.1.0	9.2.0
2010-09	RAN#49	R5-104231	0203	-	Correction CR to 36.521-3: Update of E-UTRAN TDD-TDD cell re-selection inter frequency case 4.2.6	9.1.0	9.2.0
2010-09	RAN#49	R5-104232	0204	-	Correction CR to 36.521-3: Update of E-UTRAN TDD-TDD Handover intra frequency case 5.1.2	9.1.0	9.2.0
2010-09	RAN#49	R5-104233	0205	-	Correction CR to 36.521-3: Update of E-UTRAN TDD-TDD Handover inter frequency case 5.1.4	9.1.0	9.2.0
2010-09	RAN#49	R5-104247	0206	1_	Addition of Cell Configuration Mapping for Cell Search Test	9.1.0	9.2.0
2010-09	RAN#49	R5-104248	0207	<u> </u>	CR to 36.521-3 on Correction to cell search	9.1.0	9.2.0
2010-09	RAN#49	R5-104249	0208	1-	CR to 36.521-3 on Correction to UE Measurement Procedures	9.1.0	9.2.0
2010-09	RAN#49	R5-104250	0209	1-	CR to 36.521-3 on Correction to RRM Cell Search	9.1.0	9.2.0
2010-09	RAN#49	R5-104251	0210	-	CR to 36.521-3 on Correction to RRM General	9.1.0	9.2.0
2010-09	RAN#49	R5-104260	0211	-	Addition of test tolerances and system uncertainties for E- UTRAN FDD random access tests	9.1.0	9.2.0
2010-09	RAN#49	R5-104261	0212	-	Addition of test tolerances and system uncertainties for E- UTRAN TDD random access tests	9.1.0	9.2.0
2010-09	RAN#49	R5-104262	0213	-	LTE-RRM: Addition of new TC E-UTRAN TDD -UTRAN FDD CPICH Ec/No absolute accuracy	9.1.0	9.2.0
2010-09	RAN#49	R5-104263	0214	+	LTE-RRM: Addition of new TC E-UTRAN TDD -UTRAN FDD CPICH RSCP absolute accuracy	9.1.0	9.2.0
2010-09	RAN#49	R5-104451	0215	-	Test Tolerances and alignment for RLM FDD TC 7.3.3, 7.3.4	9.1.0	9.2.0
2010-09	RAN#49	R5-104451	0215	Ε-	Test Tolerances and alignment for RLM FDD TC 7.3.5, 7.3.4 Test Tolerances and alignment for RLM FDD TC 7.3.5, 7.3.6	9.1.0	9.2.0
2010-09	RAN#49	R5-104453	0217	┼	Test Tolerances and alignment for RLM TDD TC 7.3.5, 7.3.6	9.1.0	9.2.0
2010-09	RAN#49	R5-104456	0217	Ε-	Uncertainties and Test Tolerances for E-UTRAN FDD Intra-		9.2.0
					frequency RRC Re-establishment	9.1.0	
2010-09	RAN#49	R5-104460	0219	-	Uncertainties and Test Tolerances for E-UTRAN FDD-FDD Inter-frequency event triggered reporting under fading propagation conditions	9.1.0	9.2.0
2010-09	RAN#49	R5-104497	0220	-	Clarification on the neighbour cell info	9.1.0	9.2.0
2010-09	RAN#49	R5-104498	0221	1-	Addition of the exceptional message to UE Transmit Timing	9.1.0	9.2.0
2010-09	RAN#49	R5-104499	0222	1-	Maintenance on exceptional messages for annnex info	9.1.0	9.2.0
2010-09	RAN#49	R5-104500	0223	-	Correction to 6.1.1 and 6.1.2 of RRC Re-establishment test case	9.1.0	9.2.0
2010-09	RAN#49	R5-104501	0224	-	Maintenance on exceptional messages for Mobility Control Info	9.1.0	9.2.0
2010-09	RAN#49	R5-104521	0225	-	36521-3 General update of sections 00 to 07: missing Introduction references formatting	9.1.0	9.2.0
2010-09	RAN#49	R5-104563	0226	-	Update on exclusion of extra delay due to RRC retransmission	9.1.0	9.2.0
2010-09	RAN#49	R5-104616	0227	-	36.521-3 Correction to test procedure in 8.11.5 and 8.11.6 test cases	9.1.0	9.2.0
2010-09	RAN#49	R5-104625	0228	1-	E-UTRAN TDD inter-frequency reselection test	9.1.0	9.2.0
2010-09	RAN#49	R5-104650	0229	-	Clarifications of test requirements in measurement accuracy tests	9.1.0	9.2.0
2010-09	RAN#49	R5-104663	0230	-	36.521-3: Annex B and Annex C update	9.1.0	9.2.0
2010-09	RAN#49	R5-104825	0231	-	Missing cell Identity change step for test cases with unknown cell 2 timing	9.1.0	9.2.0
2010-09	RAN#49	R5-104826	0232	-	Addition of test tolerances and system uncertainties for FDD timing characteristics tests	9.1.0	9.2.0
2010-09	RAN#49	R5-104827	0233	-	Addition of test tolerances and system uncertainties for TDD timing characteristics tests	9.1.0	9.2.0
2010-09	RAN#49	R5-104828	0234	-	Additions to measurement uncertainties and test tolerances for timing characteristics tests in annex F	9.1.0	9.2.0
2010-09	RAN#49	R5-104829	0235	-	Uncertainties and Test Tolerances for E-UTRAN FDD Inter- frequency RRC Re-establishment	9.1.0	9.2.0
2010-09	RAN#49	R5-104830	0236	-	Uncertainties and Test Tolerances for E-UTRAN TDD-TDD inter-frequency Handover with unknown target cell	9.1.0	9.2.0
2010-09	RAN#49	R5-104839	0237	 -	36521-3: Editorial update of sections 08	9.1.0	9.2.0
2010-09	RAN#49	R5-104849	0238	 	Maintenance on the exceptional messages in Ch8 - Annex	9.1.0	9.2.0
2010-09	RAN#49	R5-104855	0239	-	Uncertainties, Test Tolerances and Test Requirements for UE Transmit Timing	9.1.0	9.2.0
2010.00	D 1 N N # 4 O	DE 1040EC	0240	1		0.1.0	0.2.0
2010-09	RAN#49	R5-104856	0240	Ι-	GSM carrier RSSI measurement accuracy in E-UTRAN TDD	9.1.0	9.2.0
2010-09	RAN#49	R5-104859	0241	Γ	E-UTRAN_to_UTRAN_FDD_reselection Applicability of RRM inter-frequency test cases to (narrow)	9.1.0	9.2.0
2010-09	RAN#49	R5-104864	0242	-	frequency bands	9.1.0	9.2.0
2010-09	RAN#49	R5-104865	0243	Ι-	Maintenance on the exceptional messages in Ch5 - Ch6	9.1.0	9.2.0
2010-09	RAN#49	R5-104866	0244	Ι-	36.521-3: Annex E update	9.1.0	9.2.0
2010-09	RAN#49	R5-104880	0245	-	Correction to E-UTRAN to UTRAN Cell Re-Selection test case	9.1.0	9.2.0

2010-09 RA 2010-12 RA	AN#49 AN#49 AN#49 AN#49 AN#49 AN#49 AN#49 AN#49 AN#49 AN#50 AN#50 AN#50 AN#50	R5-104883 R5-104885 R5-104886 R5-104887 R5-104889 R5-104890 R5-105057 RP-100941	0247 0248 0249 0250 0251 0252 0253 0254 -	- - - - -	Requirements E-UTRAN TDD to UTRAN FDD Handover Cell ID change time and iteration procedure for RRM test cases 4.2.1, 4.2.2 Cell ID change time for RRM test cases 4.2.3, 4.2.6 Scrambling code change time for RRM test cases 4.3.1.1, 4.3.4.1, 8.5.2, 8.7.3, 8.11.4 Iteration procedure for handover and re-establishment test cases Correction to cell re-selection inter frequency test case Clarification of Radio link monitoring test cases Correction of status for RRM test cases and missing information in Annex	9.1.0 9.1.0 9.1.0 9.1.0 9.1.0 9.1.0 9.1.0 9.1.0	9.2.0 9.2.0 9.2.0 9.2.0 9.2.0 9.2.0 9.2.0 9.2.0
2010-09 RA 2010-12 RA	AN#49 AN#49 AN#49 AN#49 AN#49 AN#49 AN#49 AN#50 AN#50 AN#50	R5-104885 R5-104886 R5-104887 R5-104889 R5-104890 R5-105057 RP-100941 - R5-106079	0248 0249 0250 0251 0252 0253 0254		Cell ID change time and iteration procedure for RRM test cases 4.2.1, 4.2.2 Cell ID change time for RRM test cases 4.2.3, 4.2.6 Scrambling code change time for RRM test cases 4.3.1.1, 4.3.4.1, 8.5.2, 8.7.3, 8.11.4 Iteration procedure for handover and re-establishment test cases Correction to cell re-selection inter frequency test case Clarification of Radio link monitoring test cases Correction of status for RRM test cases and missing	9.1.0 9.1.0 9.1.0 9.1.0 9.1.0	9.2.0 9.2.0 9.2.0 9.2.0 9.2.0 9.2.0
2010-09 RA 2010-09 RA 2010-09 RA 2010-09 RA 2010-09 RA 2010-09 RA 2010-12 RA	AN#49 AN#49 AN#49 AN#49 AN#49 AN#49 AN#50 AN#50 AN#50	R5-104886 R5-104887 R5-104889 R5-104890 R5-105057 RP-100941 - R5-106079	0249 0250 0251 0252 0253 0254	- - - - -	cases 4.2.1, 4.2.2 Cell ID change time for RRM test cases 4.2.3, 4.2.6 Scrambling code change time for RRM test cases 4.3.1.1, 4.3.4.1, 8.5.2, 8.7.3, 8.11.4 Iteration procedure for handover and re-establishment test cases Correction to cell re-selection inter frequency test case Clarification of Radio link monitoring test cases Correction of status for RRM test cases and missing	9.1.0 9.1.0 9.1.0 9.1.0 9.1.0	9.2.0 9.2.0 9.2.0 9.2.0 9.2.0
2010-09 RA 2010-09 RA 2010-09 RA 2010-09 RA 2010-09 RA 2010-12 RA	AN#49 AN#49 AN#49 AN#49 AN#49 AN#49 AN#50 AN#50 AN#50	R5-104887 R5-104889 R5-104890 R5-105057 RP-100941 - R5-106079 R5-106080	0250 0251 0252 0253 0254	- - - - -	Cell ID change time for RRM test cases 4.2.3, 4.2.6 Scrambling code change time for RRM test cases 4.3.1.1, 4.3.4.1, 8.5.2, 8.7.3, 8.11.4 Iteration procedure for handover and re-establishment test cases Correction to cell re-selection inter frequency test case Clarification of Radio link monitoring test cases Correction of status for RRM test cases and missing	9.1.0 9.1.0 9.1.0 9.1.0	9.2.0 9.2.0 9.2.0 9.2.0
2010-09 RA 2010-09 RA 2010-09 RA 2010-09 RA 2010-12 RA	AN#49 AN#49 AN#49 AN#49 AN#50 AN#50 AN#50	R5-104889 R5-104890 R5-105057 RP-100941 - R5-106079 R5-106080	0251 0252 0253 0254		4.3.4.1, 8.5.2, 8.7.3, 8.11.4 Iteration procedure for handover and re-establishment test cases Correction to cell re-selection inter frequency test case Clarification of Radio link monitoring test cases Correction of status for RRM test cases and missing	9.1.0 9.1.0 9.1.0	9.2.0 9.2.0 9.2.0
2010-09 RA 2010-09 RA 2010-09 RA 2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA	AN#49 AN#49 AN#49 AN#50 AN#50 AN#50	R5-104890 R5-105057 RP-100941 - R5-106079 R5-106080	0252 0253 0254		Iteration procedure for handover and re-establishment test cases Correction to cell re-selection inter frequency test case Clarification of Radio link monitoring test cases Correction of status for RRM test cases and missing	9.1.0 9.1.0	9.2.0 9.2.0
2010-09 RA 2010-09 RA 2010-09 RA 2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA	AN#49 AN#49 AN#49 AN#50 AN#50 AN#50	R5-104890 R5-105057 RP-100941 - R5-106079 R5-106080	0252 0253 0254		cases Correction to cell re-selection inter frequency test case Clarification of Radio link monitoring test cases Correction of status for RRM test cases and missing	9.1.0 9.1.0	9.2.0 9.2.0
2010-09 RA 2010-09 RA 2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA	AN#49 AN#49 AN#50 AN#50 AN#50	R5-105057 RP-100941 - R5-106079 R5-106080	0253 0254 -	-	Correction to cell re-selection inter frequency test case Clarification of Radio link monitoring test cases Correction of status for RRM test cases and missing	9.1.0	9.2.0
2010-09 RA 2010-09 RA 2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA	AN#49 AN#49 AN#50 AN#50 AN#50	R5-105057 RP-100941 - R5-106079 R5-106080	0253 0254 -	- - - -	Clarification of Radio link monitoring test cases Correction of status for RRM test cases and missing	9.1.0	9.2.0
2010-09 RA	AN#49 AN#50 AN#50 AN#50	RP-100941 - R5-106079 R5-106080	0254	-	Correction of status for RRM test cases and missing		
	AN#50 AN#50 AN#50	- R5-106079	-	-		5.1.0	
2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA	AN#50 AN#50	R5-106080	0255	-			
2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA	AN#50 AN#50	R5-106080	0255		Re-insertion of the ambiguous step 11 of cl. 5.2.2.4.2	9.2.0	9.2.1
2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA	AN#50 AN#50	R5-106080	0255	1	according to R5-104825 after email discussion		
2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA	AN#50			-	HARQ delay exclusion for HO test: Clarification for UE-DTX-	9.2.1	9.3.0
2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA	AN#50				case		<u> </u>
2010-12 RA 2010-12 RA 2010-12 RA 2010-12 RA			0256	<u> -</u>	Iteration procedure for inter RAT handover test cases	9.2.1	9.3.0
2010-12 RA 2010-12 RA 2010-12 RA	AN#50	R5-106082	0257	-	Corrections to event triggered measurement tests using DRX	9.2.1	9.3.0
2010-12 RA 2010-12 RA 2010-12 RA	AIN#;)()	R5-106083	0258		(Clause 8) Missing titles in the RRM specification	9.2.1	9.3.0
2010-12 RA 2010-12 RA	4N#50	R5-106085	0259	Ε-	Scheduling of System information for RRM tests	9.2.1	9.3.0
2010-12 RA	4N#50	R5-106086	0260	E	Update of PDCCH aggregation level for channel BW 1,4 MHz	9.2.1	9.3.0
	4N#50 4N#50	R5-106066	0260	1-	CR to 36.521-3: Update LTE RRM test requirements for	9.2.1	9.3.0
2010-12 RA	√IN#JU	100118	0201	1	EUTRA TDD LTE band 41.	ا ،ک. ت	3.3.0
I.a.	AN#50	R5-106313	0262	 -	Uncertainties and Test Tolerances for Connected State	9.2.1	9.3.0
		100010	0202		Mobility test	0.2.1	0.0.0
2010-12 RA	4N#50	R5-106314	0263	-	Addition to Measurement Uncertainties and Test Tolerances	9.2.1	9.3.0
					for Connected State Mobility Test in Annex		
2010-12 RA	4N#50	R5-106318	0264	-	Correction to inter-RAT Connected State Mobility test setup	9.2.1	9.3.0
2010-12 RA	4N#50	R5-106320	0265	-	Correction to Inter-RAT Connected State Mobility test	9.2.1	9.3.0
221212		D= 100001			requirements		
2010-12 RA	AN#50	R5-106321	0266	-	Correction to Inter-RAT Connected State Mobility for	9.2.1	9.3.0
2010-12 RA	AN#50	R5-106322	0267		Alignment Correction to Inter-RAT Connected State Mobility test	9.2.1	9.3.0
2010-12 KA	N#30	K3-100322	0207	-	requirements	9.2.1	9.3.0
2010-12 RA	4N#50	R5-106448	0268	 	Addition of SIB7 exceptional messages	9.2.1	9.3.0
	4N#50	R5-106451	0269	1_	Correction to UE transmit timing TC	9.2.1	9.3.0
	4N#50	R5-106455	0270	1-	Correction to the exceptional messages in RSRQ tests	9.2.1	9.3.0
	AN#50	R5-106456	0271	1_	Correction to Min Test time for RRM fading tests	9.2.1	9.3.0
	AN#50	R5-106483	0272	1_	Annex E update	9.2.1	9.3.0
	4N#50	R5-106493	0273	1-	CR to 36.521-3: Update to G.2.6 Test Conditions for Delay	9.2.1	9.3.0
			02.0		Tests and UE Measurement Performance	0.2	0.0.0
2010-12 RA	4N#50	R5-106805	0274	-	Correction to test case 5.1.2 - Update of E-UTRAN TDD-TDD	9.2.1	9.3.0
					Handover intra frequency case		
2010-12 RA	4N#50	R5-106806	0275	-	Correction to test case 5.1.4 - Update of E-UTRAN TDD-TDD	9.2.1	9.3.0
					Handover inter frequency case		<u> </u>
	AN#50	R5-106807	0276	<u> -</u>	Correction to Inter-RAT UE Measurements Procedures	9.2.1	9.3.0
2010-12 RA	AN#50	R5-106808	0277	-	Correction to Inter-RAT UE Measurements Procedures under	9.2.1	9.3.0
2010 12 DA	Λ N Ι#ΕΩ	DE 100010	0070		fading	0.2.1	0.2.0
	AN#50 AN#50	R5-106810 R5-106811	0278 0279	+-	Correction to test case 8.2.1 Correction to test case 8.2.2	9.2.1 9.2.1	9.3.0 9.3.0
	4N#50 4N#50	R5-106812	0279	╀	Update of RRM OCNG patterns	9.2.1	9.3.0
				Ϊ-			
	AN#50 AN#50	R5-106829 R5-106830	0280 0281	Ε-	General Corrections to RRC_IDLE State Mobility Correction to test case 6.2.3	9.2.1 9.2.1	9.3.0 9.3.0
	4N#50 4N#50	R5-106830	0281	E	Correction to test case 6.2.3 Correction to test case 6.2.4	9.2.1	9.3.0
	4N#50 4N#50	R5-106832	0283	E	Correction to test case 6.2.4 Correction to MeasConfig-DEFAULT in RRM TCs	9.2.1	9.3.0
	4N#50 4N#50	R5-106833	0284	1	Adding support of inter-band test configuration for RRM inter-	9.2.1	9.3.0
EUTU-TZ KA	11 1 177 JU	100000	0204	1	frequency/inter-RAT test cases	J.Z. I	3.3.0
2010-12 RA	AN#50	R5-106834	0285	 	CR on UEs RRM Band applicability	9.2.1	9.3.0
	AN#50	R5-106835	0286	-	Correction to test case 7.1.2	9.2.1	9.3.0
	AN#50	R5-106836	0287	 -	Correction to test case 9.1.2.1, 9.1.2.2 and 9.2.2.1	9.2.1	9.3.0
	4N#50	R5-106840	0288	-	Update to Radio Link Monitoring Test Cases	9.2.1	9.3.0
	AN#50	R5-106857	0291	-	Correction to DL configuration on Non-Contention Based	9.2.1	9.3.0
					Random Access Test		
	AN#50	R5-106859	0292	<u> -</u>	Corrections to UE transmit timing tests (Subclause 7.3)	9.2.1	9.3.0
2010-12 RA	AN#50	R5-106862	0293	-	Correction to DL configuration on Contention Based Random	9.2.1	9.3.0
				_	Access Test		
	AN#50	R5-106864	0294	-	Update of Annex G for RLM test in DRX	9.2.1	9.3.0
2010 12 12 4	AN#50	R5-106870	0289	-	Uncertainties and Test Tolerances for UE measurements	9.2.1	9.3.0
2010-12 RA		R5-106871	0290	1	Procedures test Addition to Measurement Uncertainties and Test Tolerances	9.2.1	9.3.0

		1	I	1	Ken LIE Management Durandous toot in Annay	T	1
2011-03	RAN#51	R5-110150	0296		for UE Measurement Procedures test in Annex RRC Re-establishment tests: Corrections to Message contents	0.2.0	9.4.0
2011-03	RAN#51	R5-110150	0296	Ε-	Radio link monitoring tests: Corrections to Message contents	9.3.0	9.4.0
2011-03	RAN#51	R5-110151	0297	Ε-	UE Measurements Procedures tests: Test loop	9.3.0	9.4.0
2011-03	RAN#51	R5-110155	0298	Ε-	Removal of I I from PDSCH and PCFICH/PDCCH/PHICH	9.3.0	9.4.0
2011-03	KAIN#31	K3-110167	0299	Ī	Measurement Channel references	9.3.0	9.4.0
2011-03	RAN#51	R5-110348	0300	 	Revision of 36.521-3 Annex G - Statistical testing	9.3.0	9.4.0
2011-03	RAN#51	R5-110418	0301	 	Correction to TDD cell re-selection	9.3.0	9.4.0
2011-03	RAN#51	R5-110419	0302	-	Correction to exception messages in 4.5.1 HRPD Re selection	9.3.0	9.4.0
2011 00	10 (14)/01	110410	0002		test	0.0.0	0.4.0
2011-03	RAN#51	R5-110424	0303	-	Alignment of exception messages for TDD event triggered	9.3.0	9.4.0
					measurement tests		
2011-03	RAN#51	R5-110435	0304	-	Modification of message content definition for TC 8.4.1	9.3.0	9.4.0
2011-03	RAN#51	R5-110437	0305	-	Update to TC 8.6.1: E-UTRAN TDD - UTRAN FDD event	9.3.0	9.4.0
0011.00	D 4 N 1 1/15 4	D5 440400	2000		triggered reporting under fading propagation conditions	0.0.0	0.40
2011-03	RAN#51	R5-110438	0306	-	Correction to TC 8.7.1: E-UTRA TDD to UTRA(1.28 Mcps TDD OPTION) cell search in fading propagation conditions	9.3.0	9.4.0
2011-03	RAN#51	R5-110443	0307	 	Update to TC 8.8.1: E-UTRAN FDD - GSM event triggered	9.3.0	9.4.0
2011-03	10/114#51	110443	0307		reporting in AWGN	5.5.0	0.4.0
2011-03	RAN#51	R5-110445	0308	1-	Corrections to TC 8.9.1: E-UTRAN FDD - UTRAN TDD event	9.3.0	9.4.0
					triggered reporting under fading propagation conditions		
2011-03	RAN#51	R5-110520	0309	-	Correction to Inter-RAT Connected State Mobility for	9.3.0	9.4.0
					Alignment		
2011-03	RAN#51	R5-110546	0310	-	Uncertainties and Test Tolerances for Connected State	9.3.0	9.4.0
0011.00	D 4 N 1 1/15 4	DE 440540	2010		Mobility Inter-RAT to UTRAN test	0.0.0	0.40
2011-03	RAN#51	R5-110549	0312	-	Uncertainties and Test Tolerances for Connected State	9.3.0	9.4.0
2011-03	RAN#51	R5-110584	0314	1	Mobility Inter-RAT to GSM unknown test Correction to gap pattern ID in test case 5.1.4	9.3.0	9.4.0
2011-03	RAN#51	R5-110586	0314	F	Clarification to 1.4 MHz testing and applicability in test case	9.3.0	9.4.0
2011-03	IXAIN#31	K3-110300	0313	Γ	7.1.1	9.3.0	9.4.0
2011-03	RAN#51	R5-110588	0316	 	Test time limit correction for DRX=40ms in test case 8.1.3	9.3.0	9.4.0
2011-03	RAN#51	R5-110863	0330	<u> </u>	Higher SNR on event triggered measurement tests	9.3.0	9.4.0
2011-03	RAN#51	R5-110866	0311	1-	Addition to Measurement Uncertainties and Test Tolerances	9.3.0	9.4.0
					for Connected State Mobility Inter-RAT to UTRAN test in		
					Annex		
2011-03	RAN#51	R5-110868	0313	-	Addition to Measurement Uncertainties and Test Tolerances	9.3.0	9.4.0
					for Connected State Mobility Inter-RAT to GSM unknown test		
					in Annex		
2011-03	RAN#51	R5-110902	0317	-	CR to 36.521-3: Update LTE RRM test requirements for	9.3.0	9.4.0
2011-03	RAN#51	R5-110903	0318	-	EUTRA TDD LTE band 41 Correction to exception messages in 5.3.1 HRPD HHO test	9.3.0	9.4.0
2011-03	RAN#51	R5-110903	0319	Ε-	MIMO Correlation scenario for RLM test cases	9.3.0	9.4.0
2011-03	RAN#51	R5-110904	0320	E	Enabling HARQ for section 8 and 9 RRM Tests	9.3.0	9.4.0
2011-03	RAN#51	R5-110907	0321	t	Re-ordering of Time periods, definition of uncertainties, and	9.3.0	9.4.0
2011-03	10-114#31	10307	0321		addition of Test Tolerances for RRM test case 4.3.1.1	5.5.0	5.4.0
2011-03	RAN#51	R5-110910	0322	 	Updated Test Tolerances for RRM Test cases 7.1.1 + 7.1.2	9.3.0	9.4.0
2011-03	RAN#51	R5-110911	0323	-	Uncertainties and Test Tolerances for Connected State	9.3.0	9.4.0
					Mobility Inter-RAT to GSM tests		
2011-03	RAN#51	R5-110912	0324	-	Addition to Measurement Uncertainties and Test Tolerances	9.3.0	9.4.0
					for Connected State Mobility Inter-RAT to GSM test in Annex		
2011-03	RAN#51	R5-110927	0325	-	Corrections to RRM TC 8.1.1, 8.1.2 and 8.1.3	9.3.0	9.4.0
2011-03	RAN#51	R5-110928	0326	-	Corrections to test cases about E-UTRAN FDD-FDD Inter-	9.3.0	9.4.0
				1	frequency measurement 8.3.1, 8.3.2 and 8.3.3		
2011-03	RAN#51	R5-110929	0327	-	Corrections to TCs related to E-UTRAN FDD - UTRAN	9.3.0	9.4.0
0044.00	DANIJEA	DE 440000	0000	-	measurements: 8.5.1, 8.5.2 and 8.5.3	0.0.0	0.40
2011-03	RAN#51	R5-110930	0328	ŀ	UE Measurement procedures tests: Corrections to Message	9.3.0	9.4.0
2011-03	RAN#51	R5-110931	0329		contents DL-RMC-s and OCNG for RRM tests: Updates	9.3.0	9.4.0
2011-03	RAN#51	R5-110931	0329	F	Uncertainties and Test Tolerances for RRM test case 4.3.1.2	9.3.0	9.4.0
2011-03	RAN#51	R5-110946 R5-110948	0332	Ē	Uncertainties and Test Tolerances for RRM test case 4.3.1.2 Uncertainties and Test Tolerances for RRM test cases 4.4.1	9.3.0	9.4.0
2011-00	ι υ u tπο l	1.0 110940	0002		and 4.4.2	3.3.0	0.4.0
2011-03	RAN#51	R5-110956	0333	 -	Modification of test case 5.1.6 - E-UTRAN TDD-TDD inter	9.3.0	9.4.0
L	<u>L</u>			1	frequency handover: unknown target cell		
2011-03	RAN#51	R5-110957	0334	<u> </u> -	LTE RRM: reference to state 3A in 36.521-3	9.3.0	9.4.0
2011-03	RAN#51	R5-110958	0335	<u>-</u>	Correction to RRM testes for Alignment	9.3.0	9.4.0
2011-03	RAN#51	R5-110959	0336	-	CR to 36.521-3: E-UTRAN FDD - UTRA FDD CPICH RSCP	9.3.0	9.4.0
				1	absolute accuracy test case		
2011-03	RAN#51	R5-110960	0337	-	CR to 36.521-3: Addition of Multiple E-UTRAN FDD-FDD Inter-	9.3.0	9.4.0
0044.66	DAN''E	DE 440001	0000	-	frequency event triggered reporting test case	0.0.0	0.46
2011-03	RAN#51	R5-110961	0338	-	CR to 36.521-3: E-UTRAN FDD-FDD Inter-frequency and	9.3.0	9.4.0
2011-03	RAN#51	R5-110962	0339	L	UTRAN FDD event triggered reporting test case Correction to exception messages in Radio Link Monitoring	9.3.0	9.4.0
2011-03	I C#RIN#31	170-110902	0338		Test	9.3.0	3.4.0
<u> </u>	1	-1		٠	1.00.		

2011-03	RAN#51	R5-110963	0340	-	Correction to TC 8.4.2: E-UTRAN TDD-TDD Inter-frequency event triggered reporting when DRX is used under fading	9.3.0	9.4.0
2011-03	RAN#51	R5-110964	0341	-	propagation conditions in synchronous cells Corrections to TC 8.7.3: E-UTRAN TDD - UTRAN TDD SON ANR cell search reporting under AWGN propagation conditions	9.3.0	9.4.0
2011-03	RAN#51	R5-110965	0342	-	Correct the message definitions related to the RSRP and RSRQ performance testing	9.3.0	9.4.0
2011-03	RAN#51	R5-110966	0343	-	Update of RRM test 8.5.2 FDD SON	9.3.0	9.4.0
2011-03	RAN#51	R5-110974	0344	-	PUSCH scheduling: Correction for considering DRX	9.3.0	9.4.0
2011-03	RAN#51	R5-110980	0345	-	Correction to TC 8.8.2: E-UTRAN FDD - GSM Event triggered reporting when DRX is used in AWGN	9.3.0	9.4.0
2011-03	RAN#51	R5-110981	0346	-	Update to TC 8.10.1: E-UTRAN TDD - GSM event triggered reporting in AWGN	9.3.0	9.4.0
2011-03	RAN#51	R5-110982	0347	-	Corrections to TC 8.10.2: E-UTRAN TDD-GSM event triggered reporting when DRX is used in AWGN		9.4.0
2011-03	RAN#51	R5-110983	0348	-	Modification to TC 8.7.2: E-UTRAN TDD to UTRAN 1.28Mcps TDD cell search when DRX is used in fading propagation conditions	9.3.0	9.4.0
2011-03	RAN#51	R5-110995	0352	-	Radio link monitoring test 7.3.4: Minor correction to the test requirement	9.3.0	9.4.0
2011-03	RAN#51	R5-110996	0353	<u> - </u>	Radio link monitoring tests: Corrections to the test procedure	9.3.0	9.4.0
2011-06	RAN#52	R5-112124	0354	<u> -</u>	Uncertainties and Test Tolerances for RRM test case 8.7.1	9.4.0	9.5.0
2011-06	RAN#52	R5-112126	0355	<u> -</u>	Uncertainties and Test Tolerances for RRM test case 8.7.2	9.4.0	9.5.0
2011-06	RAN#52	R5-112128	0356	-	Uncertainties and Test Tolerances for RRM test cases 8.8.1+8.10.1	9.4.0	9.5.0
2011-06	RAN#52	R5-112152	0357	-	RRM TC-s 4.2: Transition between time intervals	9.4.0	9.5.0
2011-06	RAN#52	R5-112153	0358	-	RRM TC 4.2.6: Introduction of time duration T0	9.4.0	9.5.0
2011-06	RAN#52	R5-112155	0359	-	RRM TC-s clause 8: Reference to the state 3A / 3A-RF in the test loop	9.4.0	9.5.0
2011-06	RAN#52	R5-112185	0360	-	Addition of new RRM TC 4.3.4.3: EUTRA TDD-UTRA TDD cell reselection in fading propagation conditions: UTRA TDD is of lower priority	9.4.0	9.5.0
2011-06	RAN#52	R5-112314	0365	-	Correction to E-UTRAN FDD - UTRAN FDD cell re-selection when UTRA FDD is under lower priority	9.4.0	9.5.0
2011-06	RAN#52	R5-112315	0366	-	Correction to E-UTRA FDD-high UTRA FDD inter RAT cell reselection test case	9.4.0	9.5.0
2011-06	RAN#52	R5-112316	0367	-	Correction to E-UTRAN TDD-UTRAN TDD cell search reporting for SON ANR in AWGN propagation conditions	9.4.0	9.5.0
2011-06	RAN#52	R5-112317	0368	-	Correction on test cases of E-UTRA to UTRA cell reselection in idle state	9.4.0	9.5.0
2011-06	RAN#52	R5-112318	0369	-	Correction to E-UTRAN TDD - UTRAN TDD test case in 36.521-3	9.4.0	9.5.0
2011-06	RAN#52	R5-112418	0370	-	Update of 4.3.1.3 E-UTRA-UTRA reselection test case	9.4.0	9.5.0
2011-06	RAN#52	R5-112421	0371	-	Correction to 6.1 RRC Re-establishment test case	9.4.0	9.5.0
2011-06	RAN#52	R5-112423	0372	-	Maintenance on Message contents in 8.5.3	9.4.0	9.5.0
2011-06	RAN#52	R5-112424	0373	-	Correction to Annex H.3.3 for Inter-RAT E-UTRAN - HRPD handover	9.4.0	9.5.0
2011-06	RAN#52	R5-112454	0374	<u> - </u>	Wrong references into statistical annex	9.4.0	9.5.0
2011-06	RAN#52	R5-112457	0375	<u> </u>	References into connection diagrams in 36.508,Annex A	9.4.0	9.5.0
2011-06	RAN#52	R5-112470	0376	<u> -</u>	Misalignment in Meas Gap configuration	9.4.0	9.5.0
2011-06	RAN#52	R5-112475	0377	<u> -</u>	Band 20 missing in section 9 test cases	9.4.0	9.5.0
2011-06	RAN#52	R5-112533	0378	-	Inter-RAT TDD to GSM test	9.4.0	9.5.0
2011-06	RAN#52	R5-112536	0379	=	Addition to Measurement Uncertainties and Test Tolerances for connected state mobility Inter-RAT TDD to GSM test in Annex	9.4.0	9.5.0
2011-06	RAN#52	R5-112543	0380	-	Uncertainties and Test Tolerances for connected state mobility Inter-RAT TDD to GSM unknown test	9.4.0	9.5.0
2011-06	RAN#52	R5-112544	0381	-	Addition to Measurement Uncertainties and Test Tolerances for connected state mobility Inter-RAT TDD to GSM unknown test in Annex	9.4.0	9.5.0
2011-06	RAN#52	R5-112546	0382	-	Uncertainties and Test Tolerances for Inter-RAT to UTRAN event triggered reporting under fading test	9.4.0	9.5.0
2011-06	RAN#52	R5-112554	0383	-	Uncertainties and Test Tolerances for Inter-RAT to GSM event triggered when DRX is used in AWGN tests	9.4.0	9.5.0
2011-06	RAN#52	R5-112555	0384	-	Addition to Measurement Uncertainties and Test Tolerances for Inter-RAT to GSM event triggered when DRX is used in AWGN tests in Annex	9.4.0	9.5.0
2011-06	RAN#52	R5-112734	0385	-	Addition of Band 24 to section 9.1 and 9.2, RSRP and RSRQ measurement performance requirements	9.4.0	9.5.0
2011-06	RAN#52	R5-112741	0363	<u> -</u>	Uncertainties and Test Tolerances for RRM test case 9.3.1	9.4.0	9.5.0
2011-06	RAN#52	R5-112742	0364	<u> -</u>	Uncertainties and Test Tolerances for RRM test case 9.3.2	9.4.0	9.5.0
2011-06	RAN#52	R5-112745	0394	<u> </u> -	Completing for E-UTRAN TDD-UTRAN TDD cell	9.4.0	9.5.0

					reselecton_UTRA is of lower priority		
2011-06	RAN#52	R5-112746	0395	-	Completing for E-UTRAN FDD-UTRAN FDD-UTRAN TDD cell reselection	9.4.0	9.5.0
2011-06	RAN#52	R5-112803	0386		Addition to Measurement Uncertainties and Test Tolerances for Inter-RAT to UTRAN event triggered reporting under fading test in Annex	9.4.0	9.5.0
2011-06	RAN#52	R5-112815	0387	-	Correction to test frequency references in RRM initial condition	9.4.0	9.5.0
2011-06	RAN#52	R5-112817	0388	-	RRM TC-s 8.1.1, 8.1.2, 8.1.3, 8.2.1, 8.2.2: Changing SNR for	9.4.0	9.5.0
					serving cell		
2011-06	RAN#52	R5-112818	0389	-	RRM TC 9.6.2: Overall corrections	9.4.0	9.5.0
2011-06	RAN#52	R5-112819	0390	-	CR for 9.4 UTRA FDD measurement accuracy	9.4.0	9.5.0
2011-06	RAN#52	R5-112820	0391	-	Add test frequencies for bands 42, 43 (3500MHz)	9.4.0	9.5.0
2011-06	RAN#52	R5-112849	0398	-	Update of clause 3A.3 RRM test configuration	9.4.0	9.5.0
2011-06	RAN#52	R5-112853	0399	-	Correction to inconsistent test procedures in RRM	9.4.0	9.5.0
2011-06	RAN#52	R5-112855	0400	-	Uncertainties and Test Tolerances for RRM test case 5.2.10	9.4.0	9.5.0
2011-06	RAN#52	R5-112858	0401		Addition of new RRM TC 8.4.3: E-UTRAN TDD-TDD inter-freq event triggered reporting under AWGN in synchronous cells with DRX when L3 filtering is used	9.4.0	9.5.0

History

	Document history								
V9.0.0	July 2010	Publication							
V9.1.0	July 2010	Publication							
V9.2.0	November 2010	Publication							
V9.3.0	April 2011	Publication							
V9.4.0	July 2011	Publication							
V9.5.0	November 2011	Publication							