

ETSI TS 138 133 V15.10.0 (2020-09)



**5G;
NR;
Requirements for support of radio resource management
(3GPP TS 38.133 version 15.10.0 Release 15)**



ReferenceRTS/TSGR-0438133vfa0

Keywords5G

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2020.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M™ logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Legal notice

This Technical Specification (TS) has been produced by the ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

| | |
|--|----|
| Intellectual Property Rights | 2 |
| Legal notice | 2 |
| Modal verbs terminology..... | 2 |
| Foreword..... | 31 |
| 1 Scope | 32 |
| 2 References | 32 |
| 3 Definitions, symbols and abbreviations | 33 |
| 3.1 Definitions | 33 |
| 3.2 Symbols..... | 34 |
| 3.3 Abbreviations | 34 |
| 3.4 Test tolerances..... | 36 |
| 3.5 Frequency bands grouping | 36 |
| 3.5.1 Introduction..... | 36 |
| 3.5.2 NR operating bands in FR1 | 36 |
| 3.5.3 NR operating bands in FR2 | 36 |
| 3.6 Applicability of requirements in this specification version..... | 37 |
| 3.6.1 RRC connected state requirements in DRX..... | 37 |
| 3.6.2 Number of serving carriers | 38 |
| 3.6.2.1 Number of serving carriers for SA | 38 |
| 3.6.2.2 Number of serving carriers for EN-DC..... | 38 |
| 3.6.2.3 Number of serving carriers for NE-DC..... | 38 |
| 3.6.2.4 Number of serving carriers for NR-DC..... | 38 |
| 3.6.3 Applicability for intra-band FR2 | 38 |
| 3.6.4 Applicability for FR2 UE power classes..... | 39 |
| 3.6.5 Applicability for SDL bands..... | 39 |
| 3.6.6 Applicability of requirements for NGEN-DC operation..... | 39 |
| 3.6.7 Applicability of QCL..... | 39 |
| 4 SA: RRC_IDLE state mobility..... | 39 |
| 4.1 Cell Selection | 39 |
| 4.2 Cell Re-selection | 39 |
| 4.2.1 Introduction..... | 39 |
| 4.2.2 Requirements | 40 |
| 4.2.2.1 UE measurement capability | 40 |
| 4.2.2.2 Measurement and evaluation of serving cell..... | 40 |
| 4.2.2.3 Measurements of intra-frequency NR cells..... | 40 |
| 4.2.2.4 Measurements of inter-frequency NR cells..... | 41 |
| 4.2.2.5 Measurements of inter-RAT E-UTRAN cells..... | 43 |
| 4.2.2.6 Maximum interruption in paging reception..... | 44 |
| 4.2.2.7 General requirements | 44 |
| 5 SA: RRC_INACTIVE state mobility | 45 |
| 5.1 Cell Re-selection | 45 |
| 5.1.1 Introduction..... | 45 |
| 5.1.2 Requirements | 45 |
| 5.1.2.1 UE measurement capability | 45 |
| 5.1.2.2 Measurement and evaluation of serving cell..... | 45 |
| 5.1.2.3 Measurements of intra-frequency NR cells..... | 45 |
| 5.1.2.4 Measurements of inter-frequency NR cells..... | 45 |
| 5.1.2.5 Measurements of inter-RAT E-UTRAN cells..... | 45 |
| 5.1.2.6 Maximum interruption in paging reception..... | 45 |
| 5.1.2.7 General requirements | 45 |
| 5.2 Void..... | 46 |
| 6 RRC_CONNECTED state mobility | 46 |

| | | |
|-----------|---|----|
| 6.1 | Handover | 46 |
| 6.1.1 | NR Handover | 46 |
| 6.1.1.1 | Introduction | 46 |
| 6.1.1.2 | NR FR1 - NR FR1 Handover | 46 |
| 6.1.1.2.1 | Handover delay | 46 |
| 6.1.1.2.2 | Interruption time | 46 |
| 6.1.1.3 | NR FR2- NR FR1 Handover | 47 |
| 6.1.1.3.1 | Handover delay | 47 |
| 6.1.1.3.2 | Interruption time | 47 |
| 6.1.1.4 | NR FR2- NR FR2 Handover | 48 |
| 6.1.1.4.1 | Handover delay | 48 |
| 6.1.1.4.2 | Interruption time | 48 |
| 6.1.1.5 | NR FR1- NR FR2 Handover | 49 |
| 6.1.1.5.1 | Handover delay | 49 |
| 6.1.1.5.2 | Interruption time | 49 |
| 6.1.2 | NR Handover to other RATs | 50 |
| 6.1.2.1 | NR – E-UTRAN Handover | 50 |
| 6.1.2.1.1 | Introduction | 50 |
| 6.1.2.1.2 | Handover delay | 50 |
| 6.1.2.1.3 | Interruption time | 50 |
| 6.2 | RRC Connection Mobility Control | 50 |
| 6.2.1 | SA: RRC Re-establishment | 50 |
| 6.2.1.1 | Introduction | 50 |
| 6.2.1.2 | Requirements | 51 |
| 6.2.1.2.1 | UE Re-establishment delay requirement | 51 |
| 6.2.2 | Random access | 52 |
| 6.2.2.1 | Introduction | 52 |
| 6.2.2.2 | Requirements | 52 |
| 6.2.2.2.1 | Contention based random access | 52 |
| 6.2.2.2.2 | Non-Contention based random access | 53 |
| 6.2.2.2.3 | UE behaviour when configured with supplementary UL | 54 |
| 6.2.3 | SA: RRC Connection Release with Redirection | 54 |
| 6.2.3.1 | Introduction | 54 |
| 6.2.3.2 | Requirements | 55 |
| 6.2.3.2.1 | RRC connection release with redirection to NR | 55 |
| 6.2.3.2.2 | RRC connection release with redirection to E-UTRAN | 55 |
| 7 | Timing | 56 |
| 7.1 | UE transmit timing | 56 |
| 7.1.1 | Introduction | 56 |
| 7.1.2 | Requirements | 56 |
| 7.1.2.1 | Gradual timing adjustment | 57 |
| 7.1.2.2 | Void | 58 |
| 7.2 | UE timer accuracy | 58 |
| 7.2.1 | Introduction | 58 |
| 7.2.2 | Requirements | 58 |
| 7.3 | Timing advance | 58 |
| 7.3.1 | Introduction | 58 |
| 7.3.2 | Requirements | 58 |
| 7.3.2.1 | Timing Advance adjustment delay | 58 |
| 7.3.2.2 | Timing Advance adjustment accuracy | 59 |
| 7.4 | Cell phase synchronization accuracy | 59 |
| 7.4.1 | Definition | 59 |
| 7.4.2 | Minimum requirements | 59 |
| 7.5 | Maximum Transmission Timing Difference | 59 |
| 7.5.1 | Introduction | 59 |
| 7.5.2 | Minimum Requirements for inter-band EN-DC | 59 |
| 7.5.2.1 | Minimum Requirements for inter-band synchronous EN-DC | 60 |
| 7.5.3 | Minimum Requirements for intra-band EN-DC | 60 |
| 7.5.4 | Minimum Requirements for NR Carrier Aggregation | 60 |
| 7.5.5 | Minimum Requirements for inter-band NE-DC | 61 |
| 7.5.5.1 | Minimum Requirements for inter-band synchronous NE-DC | 61 |

| | | |
|-----------|---|----|
| 7.5.6 | Minimum Requirements for inter-band NR DC | 61 |
| 7.6 | Maximum Receive Timing Difference..... | 62 |
| 7.6.1 | Introduction..... | 62 |
| 7.6.2 | Minimum Requirements for inter-band EN-DC | 62 |
| 7.6.2.1 | Minimum Requirements for inter-band synchronous EN-DC | 62 |
| 7.6.3 | Minimum Requirements for intra-band EN-DC | 63 |
| 7.6.4 | Minimum Requirements for NR Carrier Aggregation | 63 |
| 7.6.5 | Minimum Requirements for inter-band NE-DC | 64 |
| 7.6.5.1 | Minimum Requirements for inter-band synchronous NE-DC | 64 |
| 7.6.6 | Minimum Requirements for inter-band NR DC | 64 |
| 7.7 | <i>deriveSSB-IndexFromCell</i> tolerance | 65 |
| 7.7.1 | Minimum requirements..... | 65 |
| 7.8 | Void..... | 65 |
| 8 | Signalling characteristics..... | 65 |
| 8.1 | Radio Link Monitoring..... | 65 |
| 8.1.1 | Introduction..... | 65 |
| 8.1.2 | Requirements for SSB based radio link monitoring | 66 |
| 8.1.2.1 | Introduction..... | 66 |
| 8.1.2.2 | Minimum requirement | 67 |
| 8.1.2.3 | Measurement restrictions for SSB based RLM..... | 68 |
| 8.1.3 | Requirements for CSI-RS based radio link monitoring | 69 |
| 8.1.3.1 | Introduction..... | 69 |
| 8.1.3.2 | Minimum requirement | 70 |
| 8.1.3.3 | Measurement restrictions for CSI-RS based RLM..... | 72 |
| 8.1.4 | Minimum requirement at transitions..... | 72 |
| 8.1.5 | Minimum requirement for UE turning off the transmitter | 73 |
| 8.1.6 | Minimum requirement for L1 indication | 73 |
| 8.1.7 | Scheduling availability of UE during radio link monitoring..... | 73 |
| 8.1.7.1 | Scheduling availability of UE performing radio link monitoring with a same subcarrier spacing as PDSCH/PDCCH on FR1 | 73 |
| 8.1.7.2 | Scheduling availability of UE performing radio link monitoring with a different subcarrier spacing than PDSCH/PDCCH on FR1..... | 73 |
| 8.1.7.3 | Scheduling availability of UE performing radio link monitoring on FR2..... | 74 |
| 8.1.7.4 | Scheduling availability of UE performing radio link monitoring on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR-DC..... | 74 |
| 8.2 | Interruption..... | 74 |
| 8.2.1 | EN-DC Interruption..... | 74 |
| 8.2.1.1 | Introduction..... | 74 |
| 8.2.1.2 | Requirements | 75 |
| 8.2.1.2.1 | Interruptions at transitions between active and non-active during DRX | 75 |
| 8.2.1.2.2 | Interruptions at transitions from non-DRX to DRX | 75 |
| 8.2.1.2.3 | Interruptions at SCell addition/release..... | 75 |
| 8.2.1.2.4 | Interruptions at SCell activation/deactivation..... | 76 |
| 8.2.1.2.5 | Interruptions during measurements on SCC..... | 77 |
| 8.2.1.2.6 | Interruptions at UL carrier RRC reconfiguration | 78 |
| 8.2.1.2.7 | Interruptions due to Active BWP switching Requirement | 78 |
| 8.2.2 | SA: Interruptions with Standalone NR Carrier Aggregation | 79 |
| 8.2.2.1 | Introduction..... | 79 |
| 8.2.2.2 | Requirements | 80 |
| 8.2.2.2.1 | Interruptions at SCell addition/release..... | 80 |
| 8.2.2.2.2 | Interruptions at SCell activation/deactivation..... | 80 |
| 8.2.2.2.3 | Interruptions during measurements on deactivated SCC..... | 81 |
| 8.2.2.2.4 | Interruptions at UL carrier RRC reconfiguration | 81 |
| 8.2.2.2.5 | Interruptions due to Active BWP switching Requirement | 82 |
| 8.2.2.2.6 | Interruptions at inter-frequency SFTD measurement | 83 |
| 8.2.3 | NE-DC Interruptions..... | 84 |
| 8.2.3.1 | Introduction..... | 84 |
| 8.2.3.2 | Requirements | 84 |
| 8.2.3.2.1 | Interruptions at transitions between active and non-active during DRX | 84 |
| 8.2.3.2.2 | Interruptions at transitions from non-DRX to DRX | 84 |
| 8.2.3.2.3 | Interruptions at PSCell/SCell addition/release | 85 |

| | | |
|-----------|--|-----|
| 8.2.3.2.4 | Interruptions at SCell activation/deactivation..... | 86 |
| 8.2.3.2.5 | Interruptions during measurements on SCC..... | 87 |
| 8.2.3.2.6 | Interruptions at UL carrier RRC reconfiguration | 87 |
| 8.2.3.2.7 | Interruptions due to Active BWP switching Requirement | 88 |
| 8.2.4 | NR-DC: Interruptions | 88 |
| 8.2.4.1 | Introduction..... | 88 |
| 8.2.4.2 | Requirements | 88 |
| 8.2.4.2.1 | Interruptions at PSCell/SCell addition/release | 88 |
| 8.2.4.2.2 | Interruptions at SCell activation/deactivation..... | 89 |
| 8.2.4.2.3 | Interruptions during measurements on SCC..... | 90 |
| 8.2.4.2.4 | Interruptions at UL carrier RRC reconfiguration | 90 |
| 8.2.4.2.5 | Interruptions due to Active BWP switching Requirement | 90 |
| 8.2.4.2.6 | Interruptions at transitions between active and non-active during DRX | 91 |
| 8.2.4.2.7 | Interruptions at transitions from non-DRX to DRX | 91 |
| 8.3 | SCell Activation and Deactivation Delay..... | 91 |
| 8.3.1 | Introduction..... | 91 |
| 8.3.2 | SCell Activation Delay Requirement for Deactivated SCell | 91 |
| 8.3.3 | SCell Deactivation Delay Requirement for Activated SCell | 94 |
| 8.4 | UE UL carrier RRC reconfiguration delay..... | 95 |
| 8.4.1 | Introduction..... | 95 |
| 8.4.2 | UE UL carrier configuration delay requirement..... | 95 |
| 8.4.3 | UE UL carrier deconfiguration delay requirement | 95 |
| 8.5 | Link Recovery Procedures | 95 |
| 8.5.1 | Introduction..... | 95 |
| 8.5.2 | Requirements for SSB based beam failure detection..... | 96 |
| 8.5.2.1 | Introduction..... | 96 |
| 8.5.2.2 | Minimum requirement | 96 |
| 8.5.2.3 | Measurement restriction for SSB based beam failure detection..... | 98 |
| 8.5.3 | Requirements for CSI-RS based beam failure detection..... | 98 |
| 8.5.3.1 | Introduction..... | 98 |
| 8.5.3.2 | Minimum requirement | 99 |
| 8.5.3.3 | Measurement restrictions for CSI-RS beam failure detection..... | 101 |
| 8.5.4 | Minimum requirement for L1 indication | 101 |
| 8.5.5 | Requirements for SSB based candidate beam detection..... | 102 |
| 8.5.5.1 | Introduction..... | 102 |
| 8.5.5.2 | Minimum requirement | 102 |
| 8.5.5.3 | Measurement restriction for SSB based candidate beam detection..... | 104 |
| 8.5.6 | Requirements for CSI-RS based candidate beam detection..... | 104 |
| 8.5.6.1 | Introduction..... | 104 |
| 8.5.6.2 | Minimum requirement | 104 |
| 8.5.6.3 | Measurement restriction for CSI-RS based candidate beam detection | 106 |
| 8.5.7 | Scheduling availability of UE during beam failure detection | 106 |
| 8.5.7.1 | Scheduling availability of UE performing beam failure detection with a same subcarrier spacing as PDSCH/PDCCH on FR1 | 107 |
| 8.5.7.2 | Scheduling availability of UE performing beam failure detection with a different subcarrier spacing than PDSCH/PDCCH on FR1..... | 107 |
| 8.5.7.3 | Scheduling availability of UE performing beam failure detection on FR2 | 107 |
| 8.5.7.4 | Scheduling availability of UE performing beam failure detection on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR DC | 107 |
| 8.5.8 | Scheduling availability of UE during candidate beam detection | 108 |
| 8.5.8.1 | Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1 | 108 |
| 8.5.8.2 | Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1..... | 108 |
| 8.5.8.3 | Scheduling availability of UE performing L1-RSRP measurement on FR2..... | 108 |
| 8.5.8.4 | Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR-DC..... | 109 |
| 8.6 | Active BWP switch delay..... | 109 |
| 8.6.1 | Introduction..... | 109 |
| 8.6.2 | DCI and timer based BWP switch delay..... | 109 |
| 8.6.3 | RRC based BWP switch delay..... | 110 |
| 8.7 | Void..... | 110 |

| | | |
|-----------|--|-----|
| 8.8 | NE-DC: E-UTRAN PSCell Addition and Release Delay | 110 |
| 8.8.1 | Introduction..... | 110 |
| 8.8.2 | E-UTRAN PSCell Addition Delay Requirement..... | 110 |
| 8.8.3 | E-UTRAN PSCell Release Delay Requirement | 111 |
| 8.9 | NR-DC: PSCell Addition and Release Delay..... | 111 |
| 8.9.1 | Introduction..... | 111 |
| 8.9.2 | PSCell Addition Delay Requirement | 111 |
| 8.9.3 | PSCell Release Delay Requirement..... | 112 |
| 8.10 | Active TCI state switching delay | 112 |
| 8.10.6 | Active TCI state list update delay..... | 114 |
| 8.11 | PSCell Change..... | 114 |
| 9 | Measurement Procedure | 115 |
| 9.1 | General measurement requirement..... | 115 |
| 9.1.1 | Introduction..... | 115 |
| 9.1.2 | Measurement gap..... | 115 |
| 9.1.2.1 | EN-DC: Measurement Gap Sharing..... | 122 |
| 9.1.2.1a | SA: Measurement Gap Sharing..... | 123 |
| 9.1.2.1b | NE-DC: Measurement Gap Sharing..... | 123 |
| 9.1.2.1c | NR-DC: Measurement Gap Sharing | 124 |
| 9.1.3 | UE Measurement capability..... | 125 |
| 9.1.3.1 | EN-DC: Monitoring of multiple layers using gaps | 125 |
| 9.1.3.1a | SA: Monitoring of multiple layers using gaps | 125 |
| 9.1.3.1b | NE-DC: Monitoring of multiple layers using gaps | 126 |
| 9.1.3.1c | NR-DC: Monitoring of multiple layers using gaps | 126 |
| 9.1.3.2 | EN-DC: Maximum allowed layers for multiple monitoring | 127 |
| 9.1.3.2a | SA: Maximum allowed layers for multiple monitoring | 127 |
| 9.1.3.2b | NE-DC: Maximum allowed layers for multiple monitoring | 128 |
| 9.1.3.2c | NR-DC: Maximum allowed layers for multiple monitoring | 128 |
| 9.1.4 | Capabilities for Support of Event Triggering and Reporting Criteria..... | 129 |
| 9.1.4.1 | Introduction..... | 129 |
| 9.1.4.2 | Requirements | 129 |
| 9.1.5 | Carrier-specific scaling factor..... | 130 |
| 9.1.5.1 | Monitoring of multiple layers outside gaps..... | 130 |
| 9.1.5.1.1 | EN-DC mode: carrier-specific scaling factor for SSB-based measurements performed outside gaps..... | 131 |
| 9.1.5.1.2 | SA mode: carrier-specific scaling factor for SSB-based measurements performed outside gaps..... | 131 |
| 9.1.5.1.3 | NR-DC mode: carrier-specific scaling factor for SSB-based measurements performed outside gaps..... | 132 |
| 9.1.5.1.4 | NE-DC mode: carrier-specific scaling factor for SSB-based measurements performed outside gaps..... | 132 |
| 9.1.5.2 | Monitoring of multiple layers within gaps | 133 |
| 9.1.5.2.1 | EN-DC mode: carrier-specific scaling factor for SSB-based measurements performed within gaps..... | 133 |
| 9.1.5.2.2 | SA mode: carrier-specific scaling factor for SSB-based measurements performed within gaps..... | 135 |
| 9.1.5.2.3 | NE-DC: carrier-specific scaling factor for SSB-based measurements performed within gaps..... | 136 |
| 9.1.5.2.4 | NR-DC: carrier-specific scaling factor for SSB-based measurements performed within gaps | 137 |
| 9.1.6 | Minimum requirement at transitions..... | 138 |
| 9.2 | NR intra-frequency measurements | 139 |
| 9.2.1 | Introduction..... | 139 |
| 9.2.2 | Requirements applicability | 139 |
| 9.2.3 | Number of cells and number of SSB | 139 |
| 9.2.3.1 | Requirements for FR1 | 139 |
| 9.2.3.2 | Requirements for FR2..... | 140 |
| 9.2.4 | Measurement Reporting Requirements..... | 140 |
| 9.2.4.1 | Periodic Reporting | 140 |
| 9.2.4.2 | Event-triggered Periodic Reporting..... | 140 |
| 9.2.4.3 | Event Triggered Reporting..... | 140 |
| 9.2.5 | Intrafrequency measurements without measurement gaps..... | 141 |
| 9.2.5.1 | Intrafrequency cell identification | 141 |
| 9.2.5.2 | Measurement period..... | 143 |

| | | |
|-----------|--|-----|
| 9.2.5.3 | Scheduling availability of UE during intra-frequency measurements..... | 144 |
| 9.2.5.3.1 | Scheduling availability of UE performing measurements in TDD bands on FR1 | 144 |
| 9.2.5.3.2 | Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1 | 144 |
| 9.2.5.3.3 | Scheduling availability of UE performing measurements on FR2 | 145 |
| 9.2.5.3.4 | Scheduling availability of UE performing measurements on FR1 or FR2 in case of FR1-FR2 inter-band CA | 145 |
| 9.2.5.4 | SFTD Measurements between PCell and PSCell | 145 |
| 9.2.5.4.1 | Introduction | 145 |
| 9.2.5.4.2 | SFTD Measurement delay | 146 |
| 9.2.5.4.3 | SFTD Measurement Reporting Delay | 146 |
| 9.2.6 | Intra-frequency measurements with measurement gaps | 147 |
| 9.2.6.1 | Void..... | 147 |
| 9.2.6.2 | Intra-frequency cell identification..... | 147 |
| 9.2.6.3 | Intra-frequency Measurement Period..... | 148 |
| 9.3 | NR inter-frequency measurements | 148 |
| 9.3.1 | Introduction..... | 148 |
| 9.3.2 | Requirements applicability | 149 |
| 9.3.2.1 | Void..... | 149 |
| 9.3.2.2 | Void..... | 149 |
| 9.3.3 | Number of cells and number of SSB | 149 |
| 9.3.3.1 | Requirements for FR1 | 149 |
| 9.3.3.2 | Requirements for FR2..... | 149 |
| 9.3.4 | Inter-frequency cell identification..... | 150 |
| 9.3.4.1 | Void..... | 151 |
| 9.3.4.2 | Void..... | 151 |
| 9.3.5 | Inter-frequency measurements..... | 151 |
| 9.3.5.1 | Void..... | 152 |
| 9.3.5.2 | Void..... | 152 |
| 9.3.5.3 | Void..... | 152 |
| 9.3.6 | Inter-frequency measurements reporting requirements..... | 152 |
| 9.3.6.1 | Periodic Reporting | 152 |
| 9.3.6.2 | Event-triggered Periodic Reporting..... | 152 |
| 9.3.6.3 | Event-triggered Reporting..... | 152 |
| 9.3.7 | Void | 152 |
| 9.3.8 | Inter-frequency SFTD measurement requirements..... | 152 |
| 9.3.8.1 | Introduction..... | 152 |
| 9.3.8.2 | SFTD Measurement delay..... | 153 |
| 9.3.8.3 | SFTD Measurement reporting delay | 154 |
| 9.4 | Inter-RAT measurements | 154 |
| 9.4.1 | Introduction..... | 154 |
| 9.4.2 | NR – E-UTRAN FDD measurements | 155 |
| 9.4.2.1 | Introduction..... | 155 |
| 9.4.2.2 | Requirements when no DRX is used..... | 156 |
| 9.4.2.3 | Requirements when DRX is used..... | 156 |
| 9.4.2.4 | Measurement reporting requirements..... | 157 |
| 9.4.2.4.1 | Periodic Reporting..... | 157 |
| 9.4.2.4.2 | Event-Triggered Periodic Reporting..... | 157 |
| 9.4.2.4.3 | Event-Triggered Reporting..... | 157 |
| 9.4.3 | NR – E-UTRAN TDD measurements | 158 |
| 9.4.3.1 | Introduction..... | 158 |
| 9.4.3.2 | Requirements when no DRX is used..... | 158 |
| 9.4.3.3 | Requirements when DRX is used..... | 159 |
| 9.4.3.4 | Measurement reporting requirements..... | 159 |
| 9.4.3.4.1 | Periodic Reporting..... | 159 |
| 9.4.3.4.2 | Event-Triggered Periodic Reporting..... | 160 |
| 9.4.3.4.3 | Event-Triggered Reporting..... | 160 |
| 9.4.4 | Inter-RAT RSTD measurements..... | 160 |
| 9.4.4.1 | NR – E-UTRAN FDD RSTD measurements..... | 160 |
| 9.4.4.1.1 | Introduction | 160 |
| 9.4.4.1.2 | Requirements..... | 161 |
| 9.4.4.2 | NR – E-UTRAN TDD RSTD measurements | 164 |

| | | |
|------------|--|-----|
| 9.4.4.2.1 | Introduction | 164 |
| 9.4.4.2.2 | Requirements | 165 |
| 9.4.5 | Inter-RAT E-CID measurements | 168 |
| 9.4.5.1 | NR-E-UTRAN FDD E-CID RSRP and RSRQ measurements | 168 |
| 9.4.5.1.1 | Introduction | 168 |
| 9.4.5.1.2 | Requirements | 168 |
| 9.4.5.1.3 | Measurement Reporting Delay | 168 |
| 9.4.5.2 | NR-E-UTRAN TDD E-CID RSRP and RSRQ measurements | 169 |
| 9.4.5.2.1 | Introduction | 169 |
| 9.4.5.2.2 | Requirements | 169 |
| 9.4.5.2.3 | Measurement Reporting Delay | 169 |
| 9.5 | L1-RSRP measurements for Reporting | 169 |
| 9.5.1 | Introduction | 169 |
| 9.5.2 | Requirements applicability | 169 |
| 9.5.3 | Measurement Reporting Requirements | 170 |
| 9.5.3.1 | Periodic Reporting | 170 |
| 9.5.3.2 | Semi-Persistent Reporting | 170 |
| 9.5.3.3 | Aperiodic Reporting | 170 |
| 9.5.4 | L1-RSRP measurement requirements | 170 |
| 9.5.4.1 | SSB based L1-RSRP Reporting | 170 |
| 9.5.4.2 | CSI-RS based L1-RSRP Reporting | 172 |
| 9.5.5 | Measurement restriction for CSI-RS and SSB for L1-RSRP measurement | 174 |
| 9.5.5.1 | Measurement restriction for SSB based L1-RSRP | 175 |
| 9.5.5.2 | Measurement restriction for CSI-RS based L1-RSRP | 175 |
| 9.5.6 | Scheduling availability of UE during L1-RSRP measurement | 176 |
| 9.5.6.1 | Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1 | 176 |
| 9.5.6.2 | Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1 | 176 |
| 9.5.6.3 | Scheduling availability of UE performing L1-RSRP measurement on FR2 | 176 |
| 9.5.6.4 | Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA | 177 |
| 9.6 | NE-DC: Measurements | 177 |
| 9.6.1 | Introduction | 177 |
| 9.6.2 | SFTD Measurements | 177 |
| 9.6.2.1 | Introduction | 177 |
| 9.6.2.2 | SFTD Measurement requirements | 177 |
| 10 | Measurement Performance requirements | 178 |
| 10.1 | NR measurements | 178 |
| 10.1.1 | Introduction | 178 |
| 10.1.2 | Intra-frequency RSRP accuracy requirements for FR1 | 179 |
| 10.1.2.1 | Intra-frequency SS-RSRP accuracy requirements | 179 |
| 10.1.2.1.1 | Absolute SS-RSRP Accuracy | 179 |
| 10.1.2.1.2 | Relative SS-RSRP Accuracy | 179 |
| 10.1.2.2 | Void | 180 |
| 10.1.3 | Intra-frequency RSRP accuracy requirements for FR2 | 180 |
| 10.1.3.1 | Intra-frequency SS-RSRP accuracy requirements | 180 |
| 10.1.3.1.1 | Absolute SS-RSRP Accuracy | 180 |
| 10.1.3.1.2 | Relative SS-RSRP Accuracy | 181 |
| 10.1.3.2 | Void | 182 |
| 10.1.4 | Inter-frequency RSRP accuracy requirements for FR1 | 182 |
| 10.1.4.1 | Inter-frequency SS-RSRP accuracy requirements | 182 |
| 10.1.4.1.1 | Absolute Accuracy of SS-RSRP in FR1 | 182 |
| 10.1.4.1.2 | Relative Accuracy of SS-RSRP in FR1 | 182 |
| 10.1.4.2 | Void | 183 |
| 10.1.5 | Inter-frequency RSRP accuracy requirements for FR2 | 183 |
| 10.1.5.1 | Inter-frequency SS-RSRP accuracy requirements | 183 |
| 10.1.5.1.1 | Absolute SS-RSRP Accuracy | 183 |
| 10.1.5.1.2 | Relative SS-RSRP Accuracy | 184 |
| 10.1.5.2 | Void | 185 |
| 10.1.6 | RSRP Measurement Report Mapping | 185 |

| | | |
|--|---|------------|
| 10.1.7 | Intra-frequency RSRQ accuracy requirements for FR1 | 187 |
| 10.1.7.1 | Intra-frequency SS-RSRQ accuracy requirements in FR1 | 187 |
| 10.1.7.1.1 | Absolute SS-RSRQ Accuracy in FR1 | 187 |
| 10.1.8 | Intra-frequency RSRQ accuracy requirements for FR2 | 188 |
| 10.1.8.1 | Intra-frequency SS-RSRQ accuracy requirements in FR2 | 188 |
| 10.1.8.1.1 | Absolute SS-RSRQ Accuracy in FR2 | 188 |
| 10.1.9 | Inter-frequency RSRQ accuracy requirements for FR1 | 189 |
| 10.1.9.1 | Inter-frequency SS-RSRQ accuracy requirements in FR1 | 189 |
| 10.1.9.1.1 | Absolute Accuracy of SS-RSRQ in FR1 | 189 |
| 10.1.9.1.2 | Relative Accuracy of SS-RSRQ in FR1 | 190 |
| 10.1.10 | Inter-frequency RSRQ accuracy requirements for FR2 | 190 |
| 10.1.11 | RSRQ report mapping | 192 |
| 10.1.12 | Intra-frequency SINR accuracy requirements for FR1 | 192 |
| 10.1.13 | Intra-frequency SINR accuracy requirements for FR2 | 193 |
| 10.1.14 | Inter-frequency SINR accuracy requirements for FR1 | 194 |
| 10.1.15 | Inter-frequency SINR accuracy requirements for FR2 | 195 |
| 10.1.16 | SINR report mapping | 197 |
| 10.1.17 | Power Headroom | 197 |
| 10.1.18 | $P_{CMAX,c,f}$ | 198 |
| 10.1.19 | L1-RSRP accuracy requirements for FR1 | 198 |
| 10.1.20 | L1-RSRP accuracy requirements for FR2 | 202 |
| 10.1.21 | SFTD accuracy requirements | 205 |
| 10.2 | E-UTRAN measurements | 209 |
| 10.2.1 | Introduction | 209 |
| 10.2.2 | E-UTRAN RSRP measurements | 209 |
| 10.2.3 | E-UTRAN RSRQ measurements | 210 |
| 10.2.4 | E-UTRAN RSTD measurements | 210 |
| 10.2.5 | E-UTRAN RS-SINR measurements | 210 |
| 11 | Void | 210 |
| Annex A (normative): Test Cases | | 211 |
| A.1 | Purpose of annex | 211 |
| A.2 | Requirement classification for statistical testing | 211 |
| A.2.1 | Types of requirements in TS 38.133 | 211 |
| A.2.1.1 | Time and delay requirements on UE higher layer actions | 211 |
| A.2.1.2 | Measurements of power levels, relative powers and time | 212 |
| A.2.1.3 | Implementation requirements | 212 |
| A.2.1.4 | Physical layer timing requirements | 212 |
| A.3 | RRM test configurations | 213 |
| A.3.1 | Reference measurement channels | 213 |
| A.3.1.1 | PDSCH | 213 |
| A.3.1.1.1 | FDD | 213 |
| A.3.1.1.2 | TDD | 214 |
| A.3.1.2 | CORESET for RMSI scheduling | 217 |
| A.3.1.2.1 | FDD | 217 |
| A.3.1.2.2 | TDD | 218 |
| A.3.1.3 | CORESET for RMC scheduling | 221 |
| A.3.1.3.1 | FDD | 221 |
| A.3.1.3.2 | TDD | 222 |
| A.3.1.4 | TDD UL/DL configuration | 225 |
| A.3.2 | OFDMA channel noise generator (OCNG) | 226 |
| A.3.2.1 | Generic OFDMA Channel Noise Generator (OCNG) | 226 |
| A.3.2.1.1 | OCNG pattern 1: Generic OCNG pattern for all unused REs | 226 |
| A.3.2.1.2 | OCNG pattern 2: Generic OCNG pattern for all unused REs for 2AoA setup | 227 |
| A.3.2.1.3 | OCNG pattern 3: Generic OCNG pattern for unused REs in the same bandwidth as PDSCH RMC | 227 |
| A.3.2.1.4 | OCNG pattern 4: Generic OCNG pattern for all unused REs outside SSB slot(s) | 228 |
| A.3.2.2 | Void | 228 |
| A.3.3 | Reference DRX configurations | 228 |

| | | |
|-------------|---|-----|
| A.3.3.1 | DRX Configuration 1: DRX cycle = 40 ms and TAT = 500 ms..... | 228 |
| A.3.3.2 | DRX Configuration 2: DRX cycle = 640 ms and TAT = 500 ms..... | 229 |
| A.3.3.3 | DRX Configuration 3: DRX cycle = 40 ms and TAT = Infinity | 229 |
| A.3.3.4 | DRX Configuration 4: DRX cycle = 160 ms and TAT = Infinity | 229 |
| A.3.3.5 | DRX Configuration 5: DRX cycle = 320 ms and TAT = Infinity | 230 |
| A.3.3.6 | DRX Configuration 6: DRX cycle = 320 ms and TAT = 500 ms..... | 230 |
| A.3.3.7 | DRX Configuration 7: DRX cycle = 640 ms and TAT = Infinity | 230 |
| A.3.3.8 | DRX Configuration 8: DRX cycle = 320 ms and TAT = Infinity | 231 |
| A.3.3.9 | DRX Configuration 9: DRX cycle = 40 ms and TAT = 500 ms..... | 231 |
| A.3.3.10 | DRX Configuration 10: DRX cycle = 640 ms..... | 231 |
| A.3.3.11 | DRX Configuration 11: DRX cycle = 20 ms and TAT = Infinity | 232 |
| A.3.4 | Test Cases with Different Channel Bandwidths..... | 232 |
| A.3.4.1 | Test Cases with Different E-UTRA Channel Bandwidths..... | 232 |
| A.3.4.1.1 | Introduction..... | 232 |
| A.3.4.1.2 | Principle of testing | 232 |
| A.3.5 | Test Cases for Synchronous and Asynchronous DC Operations..... | 232 |
| A.3.5.1 | EN-DC Test Cases for Synchronous and Asynchronous EN-DC Operations | 232 |
| A.3.5.1.1 | Introduction..... | 232 |
| A.3.5.1.2 | Principle of Testing | 232 |
| A.3.6 | Antenna configurations | 233 |
| A.3.6.1 | Antenna configurations for FR1 | 233 |
| A.3.6.1.1 | Antenna connection for 4 Rx capable UEs | 233 |
| A.3.6.1.1.1 | Introduction | 233 |
| A.3.6.1.1.2 | Principle of testing..... | 233 |
| A.3.6.2 | Antenna configurations for FR2 | 235 |
| A.3.7 | EN-DC test setup..... | 236 |
| A.3.7.1 | Introduction..... | 236 |
| A.3.7.2 | E-UTRAN Serving Cell Parameters | 236 |
| A.3.7.2.1 | E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) in FR1 | 236 |
| A.3.7.2.2 | E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) in FR2 | 237 |
| A.3.7A | NR FR1-FR2 test setup | 238 |
| A.3.8 | PRACH configurations..... | 238 |
| A.3.8.1 | Introduction..... | 238 |
| A.3.8.2 | PRACH configurations in FR1 | 238 |
| A.3.8.2.1 | FR1 PRACH configuration 1 | 238 |
| A.3.8.2.2 | FR1 PRACH configuration 2 | 239 |
| A.3.8.2.3 | FR1 PRACH configuration 3 | 240 |
| A.3.8.2.4 | FR1 PRACH configuration 4 | 241 |
| A.3.8.3 | PRACH configurations in FR2 | 242 |
| A.3.8.3.1 | FR2 PRACH configuration 1 | 242 |
| A.3.8.3.2 | FR2 PRACH configuration 2 | 243 |
| A.3.8.3.3 | FR2 PRACH configuration 3 | 244 |
| A.3.8.3.4 | FR2 PRACH configuration 4 | 245 |
| A.3.9 | BWP configurations | 246 |
| A.3.9.1 | Introduction..... | 246 |
| A.3.9.2 | Downlink BWP configurations..... | 247 |
| A.3.9.2.1 | Initial BWP | 247 |
| A.3.9.2.2 | Dedicated BWP..... | 247 |
| A.3.9.3 | Uplink BWP configurations..... | 247 |
| A.3.9.3.1 | Initial BWP | 247 |
| A.3.9.3.2 | Dedicated BWP..... | 248 |
| A.3.10 | SSB Configurations..... | 248 |
| A.3.10.1 | SSB Configurations for FR1 | 248 |
| A.3.10.1.1 | SSB pattern 1 in FR1: SSB allocation for SSB SCS=15 kHz in 10 MHz..... | 248 |
| A.3.10.1.2 | SSB pattern 2 in FR1: SSB allocation for SSB SCS=30 kHz in 40 MHz..... | 249 |
| A.3.10.1.3 | SSB pattern 3 in FR1: SSB allocation for SSB SCS=15 kHz in 10 MHz..... | 249 |
| A.3.10.1.4 | SSB pattern 4 in FR1: SSB allocation for SSB SCS=30 kHz in 40 MHz..... | 250 |
| A.3.10.1.5 | SSB pattern 5 in FR1: SSB allocation for SSB SCS=15 kHz starting from odd SFN in 10 MHz | 251 |
| A.3.10.1.6 | SSB pattern 6 in FR1: SSB allocation for SSB SCS=30 kHz starting from odd SFN in 40 MHz | 251 |
| A.3.10.2 | SSB Configurations for FR2..... | 252 |
| A.3.10.2.1 | SSB pattern 1 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz..... | 252 |
| A.3.10.2.2 | SSB pattern 2 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz..... | 252 |

| | | |
|---------------|--|-----|
| A.3.10.2.3 | SSB pattern 3 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz | 253 |
| A.3.10.2.4 | SSB pattern 4 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz | 253 |
| A.3.10.2.5 | SSB pattern 5 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz | 254 |
| A.3.10.2.6 | SSB pattern 6 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz | 254 |
| A.3.10.2.7 | SSB pattern 7 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz | 255 |
| A.3.10.2.8 | SSB pattern 8 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz | 255 |
| A.3.11 | SMTC Configurations | 255 |
| A.3.11.1 | SMTC pattern 1: SMTC period = 20 ms with SMTC duration = 1 ms..... | 255 |
| A.3.11.2 | SMTC pattern 2: SMTC period = 20 ms with SMTC duration = 5 ms..... | 256 |
| A.3.11.3 | SMTC pattern 3: SMTC period = 160 ms with SMTC duration = 1 ms..... | 256 |
| A.3.11.4 | SMTC pattern 4: SMTC period = 20 ms with SMTC duration = 1 ms..... | 256 |
| A.3.11.5 | SMTC pattern 5: SMTC period = 20 ms with SMTC duration = 5 ms..... | 256 |
| A.3.12 | Test Cases with Different CC Configurations | 256 |
| A.3.12.1 | EN-DC Test Cases with Different EN-DC Configurations | 256 |
| A.3.12.1.1 | Introduction | 256 |
| A.3.12.1.2 | Principle of testing | 257 |
| A.3.12.2 | Carrier Aggregation Test Cases with Different CA Configurations | 257 |
| A.3.12.2.1 | Introduction | 257 |
| A.3.12.2.2 | Principle of testing | 257 |
| A.3.13 | Test Cases in SA and EN-DC Operations | 257 |
| A.3.13.1 | Introduction..... | 257 |
| A.3.13.2 | Principle of Testing..... | 257 |
| A.3.14 | CSI-RS configurations | 258 |
| A.3.14.1 | FDD | 258 |
| A.3.14.2 | TDD | 259 |
| A.3.15 | Angle of Arrival (AoA) for FR2 RRM test cases | 262 |
| A.3.15.1 | Setup 1: Single AoA in Rx beam peak direction | 262 |
| A.3.15.2 | Setup 2: Single AoA in non Rx beam peak direction | 262 |
| A.3.15.2.1 | Setup 2a: Single AoA in non Rx beam peak direction without change in direction | 262 |
| A.3.15.2.2 | Setup 2b: Single AoA in non Rx beam peak direction with change in direction | 262 |
| A.3.15.3 | Setup 3: 2 AoAs..... | 262 |
| A.3.15.4 | Setup 4: 2 AoAs, 1 AoA in Rx beam peak direction, 1 in non Rx beam peak..... | 263 |
| A.3.15.4.1 | Setup 4a: 2 AoAs, 1 AoA in Rx beam peak direction, 1 in non Rx beam peak without change in direction | 263 |
| A.3.15.4.2 | Setup 4b: 2 AoAs, 1 AoA in Rx beam peak direction, 1 in non Rx beam peak with change in direction | 263 |
| A.3.16 | TCI State Configuration | 263 |
| A.3.16.1 | Introduction..... | 263 |
| A.3.16.2 | TCI states..... | 264 |
| A.3.17 | Configurations of CSI-RS for tracking..... | 264 |
| A.3.17.1 | Configuration of CSI-RS for tracking for FR1 | 264 |
| A.3.17.1.1 | FDD..... | 264 |
| A.3.17.1.2 | TDD | 265 |
| A.3.17.2 | Configuration of CSI-RS for tracking for FR2 | 266 |
| A.3.17.2.1 | TDD | 266 |
| A.3.18 | Additional definitions related to OTA testing for FR2 RRM test cases | 267 |
| A.3.18.1 | Introduction..... | 267 |
| A.3.18.2 | PRACH Power Measurement | 267 |
| A.4 | EN-DC tests with all NR cells in FR1 | 268 |
| A.4.1 | Void..... | 268 |
| A.4.2 | Void..... | 268 |
| A.4.3 | RRC_CONNECTED state mobility | 268 |
| A.4.3.1 | Void | 268 |
| A.4.3.2 | RRC Connection Mobility Control..... | 268 |
| A.4.3.2.1 | Void..... | 268 |
| A.4.3.2.2 | Random Access..... | 268 |
| A.4.3.2.2.1 | Contention based random access test in FR1 for PSCell in EN-DC..... | 268 |
| A.4.3.2.2.1.1 | Test Purpose and Environment..... | 268 |
| A.4.3.2.2.2 | Non-contention based random access test in FR1 for PSCell in EN-DC | 271 |
| A.4.3.2.3 | Void..... | 274 |
| A.4.4 | Timing | 274 |

| | | |
|-------------|--|-----|
| A.4.4.1 | UE transmit timing | 274 |
| A.4.4.1.1 | NR UE Transmit Timing Test for FR1 | 274 |
| A.4.4.1.1.1 | Test Purpose and environment | 274 |
| A.4.4.1.1.2 | Test requirements | 277 |
| A.4.4.2 | UE timer accuracy | 278 |
| A.4.4.3 | Timing advance | 278 |
| A.4.4.3.1 | EN-DC FR1 timing advance adjustment accuracy..... | 278 |
| A.4.4.3.1.1 | Test Purpose and Environment..... | 278 |
| A.4.4.3.1.2 | Test Parameters | 278 |
| A.4.4.3.1.3 | Test Requirements..... | 281 |
| A.4.5 | Signaling characteristics..... | 281 |
| A.4.5.1 | Radio link Monitoring | 281 |
| A.4.5.1.1 | Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with SSB-based RLM RS in non-DRX mode..... | 282 |
| A.4.5.1.1.1 | Test Purpose and Environment..... | 282 |
| A.4.5.1.1.2 | Test Requirements..... | 285 |
| A.4.5.1.2 | Radio Link Monitoring In-sync Test for FR1 PSCell configured with SSB-based RLM RS in non-DRX mode | 285 |
| A.4.5.1.2.2 | Test Requirements..... | 289 |
| A.4.5.1.3 | Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with SSB-based RLM RS in DRX mode | 289 |
| A.4.5.1.3.1 | Test Purpose and Environment..... | 289 |
| A.4.5.1.3.2 | Test Requirements | 292 |
| A.4.5.1.4 | Radio Link Monitoring In-sync Test for FR1 PSCell configured with SSB-based RLM RS in DRX mode | 293 |
| A.4.5.1.4.1 | Test Purpose and Environment..... | 293 |
| A.4.5.1.4.2 | Test Requirements..... | 296 |
| A.4.5.1.5 | EN-DC Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with CSI-RS-based RLM in non-DRX mode | 296 |
| A.4.5.1.5.1 | Test Purpose and Environment..... | 296 |
| A.4.5.1.5.2 | Test Requirements..... | 299 |
| A.4.5.1.6 | EN-DC Radio Link Monitoring In-sync Test for FR1 PSCell configured with CSI-RS-based RLM in non-DRX mode | 300 |
| A.4.5.1.6.1 | Test Purpose and Environment..... | 300 |
| A.4.5.1.6.2 | Test Requirements..... | 303 |
| A.4.5.1.7 | EN-DC Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with CSI-RS-based RLM in DRX mode..... | 303 |
| A.4.5.1.7.1 | Test Purpose and Environment..... | 303 |
| A.4.5.1.7.2 | Test Requirements..... | 307 |
| A.4.5.1.8 | EN-DC Radio Link Monitoring In-sync Test for FR1 PSCell configured with CSI-RS-based RLM in DRX mode..... | 307 |
| A.4.5.1.8.1 | Test Purpose and Environment..... | 307 |
| A.4.5.1.8.2 | Test Requirements..... | 311 |
| A.4.5.2 | Interruption | 311 |
| A.4.5.2.1 | E-UTRAN – NR FR1 interruptions at transitions between active and non-active during DRX in synchronous EN-DC | 311 |
| A.4.5.2.1.1 | Test Purpose and Environment..... | 311 |
| A.4.5.2.1.2 | Test Requirements..... | 313 |
| A.4.5.2.2 | E-UTRAN – NR FR1 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC..... | 314 |
| A.4.5.2.2.1 | Test Purpose and Environment..... | 314 |
| A.4.5.2.2.2 | Test Requirements..... | 316 |
| A.4.5.2.3 | E-UTRAN – NR FR1 interruptions during measurements on deactivated NR SCC in synchronous EN-DC | 317 |
| A.4.5.2.3.1 | Test Purpose and Environment..... | 317 |
| A.4.5.2.3.2 | Test Requirements..... | 319 |
| A.4.5.2.4 | E-UTRAN – NR FR1 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC..... | 320 |
| A.4.5.2.4.1 | Test Purpose and Environment..... | 320 |
| A.4.5.2.4.2 | Test Requirements..... | 324 |
| A.4.5.2.5 | E-UTRAN – NR FR1 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC | 325 |

| | | |
|---------------|--|-----|
| A.4.5.2.5.1 | Test Purpose and Environment..... | 325 |
| A.4.5.2.5.2 | Test Requirements..... | 327 |
| A.4.5.2.6 | E-UTRAN – NR FR1 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC..... | 328 |
| A.4.5.2.6.1 | Test Purpose and Environment..... | 328 |
| A.4.5.2.6.2 | Test Requirements..... | 330 |
| A.4.5.2.7 | Void..... | 331 |
| A.4.5.3.1 | SCell Activation and deactivation of known SCell in FR1 for 160ms SCell measurement cycle | 331 |
| A.4.5.3.1.1 | Test Purpose and Environment..... | 331 |
| A.4.5.3.1.2 | Test Requirements..... | 334 |
| A.4.5.3.2 | SCell Activation and deactivation of known SCell in FR1 for 320 ms SCell measurement cycle | 335 |
| A.4.5.3.2.1 | Test Purpose and Environment..... | 335 |
| A.4.5.3.2.2 | Test Requirements..... | 335 |
| A.4.5.3.3 | SCell Activation and deactivation of unknown SCell in FR1 | 335 |
| A.4.5.3.3.1 | Test Purpose and Environment..... | 335 |
| A.4.5.3.3.2 | Test Requirements..... | 336 |
| A.4.5.4 | UE UL carrier RRC reconfiguration Delay | 337 |
| A.4.5.4.1 | UE UL carrier RRC reconfiguration Delay..... | 337 |
| A.4.5.4.1.1 | Test Purpose and Environment..... | 337 |
| A.4.5.4.1.2 | Test Requirements..... | 342 |
| A.4.5.5 | Beam Failure Detection and Link recovery procedures..... | 342 |
| A.4.5.5.1 | EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with SSB-based BFD and LR in non-DRX mode | 342 |
| A.4.5.5.1.1 | Test Purpose and Environment..... | 342 |
| A.4.5.5.1.2 | Test Requirements..... | 346 |
| A.4.5.5.2 | EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with SSB-based BFD and LR in DRX mode..... | 347 |
| A.4.5.5.2.1 | Test Purpose and Environment..... | 347 |
| A.4.5.5.2.2 | Test Requirements..... | 351 |
| A.4.5.5.3 | EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with CSI-RS-based BFD and LR in non-DRX mode | 351 |
| A.4.5.5.3.1 | Test Purpose and Environment..... | 351 |
| A.4.5.5.3.2 | Test Requirements..... | 355 |
| A.4.5.5.4 | EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with CSI-RS-based BFD and LR in DRX mode..... | 355 |
| A.4.5.5.4.1 | Test Purpose and Environment..... | 355 |
| A.4.5.5.4.2 | Test Requirements..... | 359 |
| A.4.5.6.1 | DCI-based and Timer-based Active BWP Switch | 359 |
| A.4.5.6.1.1 | E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC | 359 |
| A.4.5.6.1.1.1 | Test Purpose and Environment | 359 |
| A.4.5.6.1.1.2 | Test Requirements | 362 |
| A.4.5.6.1.2 | E-UTRAN – NR PSCell FR1 DL active BWP switch with FR1 SCell in non-DRX in synchronous EN-DC..... | 363 |
| A.4.5.6.1.2.1 | Test Purpose and Environment | 363 |
| A.4.5.6.1.2.2 | Test Requirements | 366 |
| A.4.5.6.2 | RRC-based Active BWP Switch | 367 |
| A.4.5.6.2.1.1 | Test Purpose and Environment | 367 |
| A.4.5.6.2.1.2 | Test Requirements | 371 |
| A.4.5.7 | PSCell addition and release delay..... | 371 |
| A.4.5.7.1 | Addition and Release Delay of known NR PSCell | 371 |
| A.4.5.7.1.1 | Test purpose and environment..... | 371 |
| A.4.5.7.1.2 | Test Requirements..... | 375 |
| A.4.6 | Measurement procedure | 375 |
| A.4.6.1 | Intra-frequency Measurements | 375 |
| A.4.6.1.1 | EN-DC event triggered reporting tests without gap under non-DRX | 375 |
| A.4.6.1.1.1 | Test purpose and Environment..... | 375 |
| A.4.6.1.1.2 | Test parameters..... | 375 |
| A.4.6.1.1.3 | Test Requirements..... | 377 |
| A.4.6.1.2 | EN-DC event triggered reporting tests without gap under DRX..... | 378 |
| A.4.6.1.2.1 | Test purpose and Environment..... | 378 |
| A.4.6.1.2.2 | Test parameters..... | 378 |
| A.4.6.1.2.2 | Test Requirements..... | 380 |

| | | |
|-------------|---|-----|
| A.4.6.1.3 | EN-DC event triggered reporting tests with per-UE gaps under non-DRX | 380 |
| A.4.6.1.3.1 | Test purpose and Environment | 380 |
| A.4.6.1.3.2 | Test parameters..... | 380 |
| A.4.6.1.3.3 | Test Requirements | 383 |
| A.4.6.1.4 | EN-DC event triggered reporting tests with per-UE gaps under DRX | 383 |
| A.4.6.1.4.1 | Test purpose and Environment | 383 |
| A.4.6.1.4.2 | Test parameters..... | 383 |
| A.4.6.1.4.3 | Test Requirements | 385 |
| A.4.6.1.5 | EN-DC event triggered reporting tests without gap under non-DRX with SSB index reading | 386 |
| A.4.6.1.5.1 | Test purpose and Environment | 386 |
| A.4.6.1.5.2 | Test parameters..... | 386 |
| A.4.6.1.5.3 | Test Requirements | 387 |
| A.4.6.1.6 | EN-DC event triggered reporting tests with SSB index reading with per-UE gaps | 388 |
| A.4.6.1.6.1 | Test purpose and Environment | 388 |
| A.4.6.1.6.2 | Test parameters..... | 388 |
| A.4.6.1.6.3 | Test Requirements | 390 |
| A.4.6.2 | Inter-frequency Measurements | 391 |
| A.4.6.2.1 | EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is not used | 391 |
| A.4.6.2.1.1 | Test Purpose and Environment..... | 391 |
| A.4.6.2.1.2 | Test Requirements | 394 |
| A.4.6.2.2 | EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used..... | 394 |
| A.4.6.2.2.1 | Test Purpose and Environment..... | 394 |
| A.4.6.2.2.2 | Test Requirements | 397 |
| A.4.6.2.3 | Void..... | 398 |
| A.4.6.2.4 | Void..... | 398 |
| A.4.6.2.5 | EN-DC event triggered reporting tests for FR1 cell with SSB time index detection when DRX is not used | 398 |
| A.4.6.2.5.1 | Test Purpose and Environment..... | 398 |
| A.4.6.2.5.2 | Test Requirements | 401 |
| A.4.6.2.6 | EN-DC event triggered reporting tests for FR1 cell with SSB time index detection when DRX is used | 401 |
| A.4.6.2.6.1 | Test Purpose and Environment..... | 401 |
| A.4.6.2.6.2 | Test Requirements | 405 |
| A.4.6.2.7 | Void..... | 405 |
| A.4.6.2.8 | Void..... | 405 |
| A.4.6.3 | Void | 405 |
| A.4.6.4 | L1-RSRP measurement for beam reporting..... | 405 |
| A.4.6.4.1 | SSB based L1-RSRP measurement when DRX is not used..... | 405 |
| A.4.6.4.1.1 | Test Purpose and Environment..... | 405 |
| A.4.6.4.1.2 | Test parameters..... | 406 |
| A.4.6.4.1.3 | Test Requirements | 408 |
| A.4.6.4.2 | SSB based L1-RSRP measurement when DRX is used | 408 |
| A.4.6.4.2.1 | Test Purpose and Environment..... | 408 |
| A.4.6.4.2.2 | Test parameters..... | 408 |
| A.4.6.4.2.3 | Test Requirements | 410 |
| A.4.6.4.3 | CSI-RS based L1-RSRP measurement when DRX is not used..... | 410 |
| A.4.6.4.3.1 | Test Purpose and Environment..... | 410 |
| A.4.6.4.3.2 | Test parameters..... | 411 |
| A.4.6.4.3.3 | Test Requirements | 413 |
| A.4.6.4.4 | CSI-RS based L1-RSRP measurement when DRX is used..... | 413 |
| A.4.6.4.4.1 | Test Purpose and Environment..... | 413 |
| A.4.6.4.4.2 | Test parameters..... | 413 |
| A.4.6.4.4.3 | Test Requirements | 416 |
| A.4.7 | Measurement Performance requirements | 416 |
| A.4.7.1 | SS-RSRP | 416 |
| A.4.7.1.1 | EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell..... | 416 |
| A.4.7.1.1.1 | Test Purpose and Environment..... | 416 |
| A.4.7.1.1.2 | Test parameters..... | 417 |
| A.4.7.1.1.3 | Test Requirements | 419 |
| A.4.7.1.2 | EN-DC inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell | 420 |

| | | |
|-------------|---|-----|
| A.4.7.1.2.1 | Test Purpose and Environment..... | 420 |
| A.4.7.1.2.2 | Test parameters..... | 420 |
| A.4.7.1.2.3 | Test Requirements..... | 423 |
| A.4.7.1.3 | Void..... | 423 |
| A.4.7.2 | SS-RSRQ..... | 423 |
| A.4.7.2.1 | EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell..... | 423 |
| A.4.7.2.1.1 | Test Purpose and Environment..... | 423 |
| A.4.7.2.1.2 | Test Parameters..... | 423 |
| A.4.7.2.1.3 | Test Requirements..... | 427 |
| A.4.7.2.2 | EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell..... | 427 |
| A.4.7.2.2.1 | Test Purpose and Environment..... | 427 |
| A.4.7.2.2.2 | Test Parameters..... | 427 |
| A.4.7.2.2.3 | Test Requirements..... | 430 |
| A.4.7.3 | SS-SINR..... | 431 |
| A.4.7.3.1 | EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell..... | 431 |
| A.4.7.3.1.1 | Test Purpose and Environment..... | 431 |
| A.4.7.3.1.2 | Test Parameters..... | 431 |
| A.4.7.3.1.3 | Test Requirements..... | 434 |
| A.4.7.3.2 | EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell..... | 434 |
| A.4.7.3.2.1 | Test Purpose and Environment..... | 434 |
| A.4.7.3.2.2 | Test Parameters..... | 434 |
| A.4.7.3.2.3 | Test Requirements..... | 438 |
| A.4.7.4 | L1-RSRP measurement for beam reporting..... | 438 |
| A.4.7.4.1 | SSB based L1-RSRP measurement..... | 438 |
| A.4.7.4.1.1 | Test Purpose and Environment..... | 438 |
| A.4.7.4.1.2 | Test parameters..... | 439 |
| A.4.7.4.1.3 | Test Requirements..... | 442 |
| A.4.7.4.2 | CSI-RS based L1-RSRP measurement on resource set with repetition off..... | 442 |
| A.4.7.4.2.1 | Test Purpose and Environment..... | 442 |
| A.4.7.4.2.2 | Test parameters..... | 442 |
| A.4.7.4.2.3 | Test Requirements..... | 445 |
| A.4.7.5 | SFTD accuracy..... | 445 |
| A.4.7.5.1 | SFTD accuracy..... | 445 |
| A.4.7.5.1.1 | Test Purpose and Environment..... | 445 |
| A.4.7.5.1.2 | Test Parameters..... | 445 |
| A.4.7.5.1.3 | Test Requirements..... | 448 |
| A.4.7.5.2 | Void..... | 448 |
| A.4.7.5.3 | Void..... | 448 |
| A.4.8 | Void..... | 448 |
| A.5 | EN-DC tests with one or more NR cells in FR2..... | 449 |
| A.5.1 | Void..... | 449 |
| A.5.2 | Void..... | 449 |
| A.5.3 | RRC_CONNECTED state mobility..... | 449 |
| A.5.3.1 | Void..... | 449 |
| A.5.3.2 | RRC Connection Mobility Control..... | 449 |
| A.5.3.2.1 | Void..... | 449 |
| A.5.3.2.2 | Random Access..... | 449 |
| A.5.3.2.2.1 | Contention based random access test in FR2 for PSCell/SCell in EN-DC..... | 449 |
| A.5.3.2.2.2 | Non-contention based random access test in FR2 for PSCell/SCell in EN-DC..... | 453 |
| A.5.3.2.3 | Void..... | 457 |
| A.5.4 | Timing..... | 457 |
| A.5.4.1 | UE transmit timing..... | 457 |
| A.5.4.1.1 | NR UE Transmit Timing Test for FR2..... | 457 |
| A.5.4.1.1.1 | Test Purpose and environment..... | 457 |
| A.5.4.1.1.2 | Test requirements..... | 459 |
| A.5.4.2 | UE timer accuracy..... | 460 |
| A.5.4.3 | Timing advance..... | 460 |
| A.5.4.3.1 | EN-DC FR2 timing advance adjustment accuracy..... | 460 |
| A.5.4.3.1.1 | Test Purpose and Environment..... | 460 |
| A.5.4.3.1.2 | Test Parameters..... | 460 |
| A.5.4.3.1.3 | Test Requirements..... | 464 |

| | | |
|-------------|--|-----|
| A.5.5 | Signaling characteristics..... | 464 |
| A.5.5.1 | Radio link Monitoring | 464 |
| A.5.5.1.1 | Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with SSB-based RLM RS in non-DRX mode | 464 |
| A.5.5.1.1.1 | Test Purpose and Environment..... | 464 |
| A.5.5.1.1.2 | Test Requirements..... | 467 |
| A.5.5.1.2 | Radio Link Monitoring In-sync Test for FR2 PSCell configured with SSB-based RLM RS in non-DRX mode | 468 |
| A.5.5.1.2.1 | Test Purpose and Environment..... | 468 |
| A.5.5.1.2.2 | Test Requirements..... | 471 |
| A.5.5.1.3 | Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with SSB-based RLM RS in DRX mode | 471 |
| A.5.5.1.3.1 | Test Purpose and Environment..... | 471 |
| A.5.5.1.3.2 | Test Requirements..... | 475 |
| A.5.5.1.4 | Radio Link Monitoring In-sync Test for FR2 PSCell configured with SSB-based RLM RS in DRX mode | 475 |
| A.5.5.1.4.1 | Test Purpose and Environment..... | 475 |
| A.5.5.1.4.2 | Test Requirements..... | 478 |
| A.5.5.1.5 | EN-DC Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with CSI-RS-based RLM in non-DRX mode | 478 |
| A.5.5.1.6 | EN-DC Radio Link Monitoring In-sync Test for FR2 PSCell configured with CSI-RS-based RLM in non-DRX mode | 482 |
| A.5.5.1.7 | EN-DC Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with CSI-RS-based RLM in DRX mode..... | 486 |
| A.5.5.1.8 | EN-DC Radio Link Monitoring In-sync Test for FR2 PSCell configured with CSI-RS-based RLM in DRX mode..... | 490 |
| A.5.5.1.8.2 | Test Requirements..... | 494 |
| A.5.5.1.9 | EN-DC Radio Link Monitoring UE Scheduling Restrictions on FR2 | 494 |
| A.5.5.1.9.1 | Test Purpose and Environment..... | 494 |
| A.5.5.1.9.2 | Test Requirements..... | 496 |
| A.5.5.2 | Interruption | 496 |
| A.5.5.2.1 | E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC | 496 |
| A.5.5.2.1.1 | Test Purpose and Environment..... | 496 |
| A.5.5.2.1.2 | Test Requirements..... | 499 |
| A.5.5.2.2 | E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC..... | 499 |
| A.5.5.2.2.1 | Test Purpose and Environment..... | 499 |
| A.5.5.2.2.2 | Test Requirements..... | 502 |
| A.5.5.2.3 | E-UTRAN – NR FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC | 502 |
| A.5.5.2.3.1 | Test Purpose and Environment..... | 502 |
| A.5.5.2.3.2 | Test Requirements..... | 505 |
| A.5.5.2.4 | E-UTRAN – NR FR2 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC..... | 506 |
| A.5.5.2.4.1 | Test Purpose and Environment..... | 506 |
| A.5.5.2.4.2 | Test Requirements..... | 509 |
| A.5.5.2.5 | E-UTRAN – NR FR2 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC | 510 |
| A.5.5.2.5.1 | Test Purpose and Environment..... | 510 |
| A.5.5.2.5.2 | Test Requirements..... | 513 |
| A.5.5.2.6 | E-UTRAN – NR FR2 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC..... | 514 |
| A.5.5.2.6.1 | Test Purpose and Environment..... | 514 |
| A.5.5.2.6.2 | Test Requirements..... | 516 |
| A.5.5.3.1 | SCell Activation and deactivation of SCell in FR2 intra-band | 517 |
| A.5.5.3.1.1 | Test Purpose and Environment..... | 517 |
| A.5.5.3.1.2 | Test Requirements..... | 519 |
| A.5.5.3.2 | SCell Activation and deactivation of known SCell in FR1 for 160ms SCell measurement cycle | 519 |
| A.5.5.3.2.1 | Test Purpose and Environment..... | 519 |
| A.5.5.3.2.2 | Test Requirements..... | 522 |
| A.5.5.3.3 | Void..... | 522 |

| | | |
|---------------|--|-----|
| A.5.5.3.4 | Void..... | 522 |
| A.5.5.3.5 | SCell Activation and deactivation of SCell in FR2..... | 522 |
| A.5.5.3.5.1 | Test Purpose and Environment..... | 522 |
| A.5.5.3.5.2 | Test Requirements..... | 524 |
| A.5.5.4 | Void..... | 525 |
| A.5.5.5 | Beam Failure Detection and Link recovery procedures..... | 525 |
| A.5.5.5.1 | EN-DC Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with SSB-based BFD and LR in non-DRX mode..... | 525 |
| A.5.5.5.1.1 | Test Purpose and Environment..... | 525 |
| A.5.5.5.1.2 | Test Requirements..... | 528 |
| A.5.5.5.2 | EN-DC Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with SSB-based BFD and LR in DRX mode..... | 529 |
| A.5.5.5.2.1 | Test Purpose and Environment..... | 529 |
| A.5.5.5.2.2 | Test Requirements..... | 532 |
| A.5.5.5.3 | EN-DC Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with CSI-RS-based BFD and LR in non-DRX mode..... | 532 |
| A.5.5.5.3.1 | Test Purpose and Environment..... | 532 |
| A.5.5.5.3.2 | Test Requirements..... | 535 |
| A.5.5.5.4 | EN-DC Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with CSI-RS-based BFD and LR in DRX mode..... | 536 |
| A.5.5.5.4.1 | Test Purpose and Environment..... | 536 |
| A.5.5.5.4.2 | Test Requirements..... | 539 |
| A.5.5.5.5 | EN-DC scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2 PSCell configured with SSB-based BFD and LR in non-DRX mode..... | 539 |
| A.5.5.5.5.1 | Test Purpose and Environment..... | 539 |
| A.5.5.5.5.2 | Test Requirements..... | 543 |
| A.5.5.6 | Active BWP switch..... | 544 |
| A.5.5.6.1 | DCI-based and Timer-based Active BWP Switch..... | 544 |
| A.5.5.6.1.1 | E-UTRAN – NR PSCell FR2 DL active BWP switch with non-DRX in synchronous EN-DC ... | 544 |
| A.5.5.6.1.1.1 | Test Purpose and Environment..... | 544 |
| A.5.5.6.1.1.2 | Test Requirements..... | 547 |
| A.5.5.6.1.2 | E-UTRAN – NR PSCell FR2 DL active BWP switch with FR2 SCell in non-DRX in synchronous EN-DC..... | 548 |
| A.5.5.6.1.2.1 | Test Purpose and Environment..... | 548 |
| A.5.5.6.1.2.2 | Test Requirements..... | 551 |
| A.5.5.6.2 | RRC-based Active BWP Switch..... | 552 |
| A.5.5.6.2.1 | E-UTRAN – NR PSCell FR2 DL active BWP switch with non-DRX in synchronous EN-DC ... | 552 |
| A.5.5.6.2.1.1 | Test Purpose and Environment..... | 552 |
| A.5.5.6.2.1.2 | Test Requirements..... | 555 |
| A.5.5.7 | PSCell addition and release delay..... | 555 |
| A.5.5.7.1 | Addition and Release Delay of NR PSCell..... | 555 |
| A.5.5.7.1.1 | Test purpose and environment..... | 555 |
| A.5.5.7.1.2 | Test Requirements..... | 559 |
| A.5.5.8 | Active TCI state switch delay..... | 560 |
| A.5.5.8.1 | MAC-CE based active TCI state switch..... | 560 |
| A.5.5.8.1.1 | E-UTRAN – NR PSCell FR2 active TCI state switch for a known TCI state..... | 560 |
| A.5.5.8.1.1.1 | Test Purpose and Environment..... | 560 |
| A.5.5.8.1.1.2 | Test Requirements..... | 562 |
| A.5.5.8.2 | RRC based active TCI state switch..... | 562 |
| A.5.5.8.2.1 | E-UTRAN – NR PSCell FR2 active TCI state switch for a known TCI state..... | 562 |
| A.5.5.8.2.1.1 | Test Purpose and Environment..... | 562 |
| A.5.5.8.2.1.2 | Test Requirements..... | 565 |
| A.5.6 | Measurement procedure..... | 565 |
| A.5.6.1 | Intra-frequency Measurements..... | 565 |
| A.5.6.1.1 | EN-DC event triggered reporting test without gap under non-DRX..... | 565 |
| A.5.6.1.1.1 | Test purpose and Environment..... | 565 |
| A.5.6.1.1.2 | Test Requirements..... | 567 |
| A.5.6.1.2 | EN-DC event triggered reporting test without gap under DRX..... | 568 |
| A.5.6.1.2.1 | Test purpose and Environment..... | 568 |
| A.5.6.1.2.2 | Test Requirements..... | 570 |
| A.5.6.1.3 | EN-DC event triggered reporting test with per-UE gaps under non-DRX..... | 571 |
| A.5.6.1.3.1 | Test purpose and Environment..... | 571 |

| | | |
|-------------|--|-----|
| A.5.6.1.3.2 | Test Requirements | 573 |
| A.5.6.1.4 | EN-DC event triggered reporting test with per-UE gaps under DRX | 574 |
| A.5.6.1.4.1 | Test purpose and Environment | 574 |
| A.5.6.1.4.2 | Test Requirements | 576 |
| A.5.6.2 | Inter-frequency Measurements | 577 |
| A.5.6.2.1 | EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is not used | 577 |
| A.5.6.2.1.1 | Test Purpose and Environment | 577 |
| A.5.6.2.1.2 | Test Requirements | 580 |
| A.5.6.2.2 | EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is used | 580 |
| A.5.6.2.2.1 | Test Purpose and Environment | 580 |
| A.5.6.2.2.2 | Test Requirements | 583 |
| A.5.6.2.3 | EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is not used | 583 |
| A.5.6.2.3.1 | Test Purpose and Environment | 583 |
| A.5.6.2.3.2 | Test Requirements | 586 |
| A.5.6.2.4 | EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is used | 586 |
| A.5.6.2.4.1 | Test Purpose and Environment | 586 |
| A.5.6.2.2.4 | Test Requirements | 590 |
| A.5.6.2.5 | EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is not used | 590 |
| A.5.6.2.5.1 | Test Purpose and Environment | 590 |
| A.5.6.2.5.2 | Test Requirements | 594 |
| A.5.6.2.6 | EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is used | 595 |
| A.5.6.2.6.1 | Test Purpose and Environment | 595 |
| A.5.6.2.6.2 | Test Requirements | 598 |
| A.5.6.2.7 | EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is not used | 599 |
| A.5.6.2.7.1 | Test Purpose and Environment | 599 |
| A.5.6.2.7.2 | Test Requirements | 602 |
| A.5.6.2.8 | EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is used | 603 |
| A.5.6.2.8.1 | Test Purpose and Environment | 603 |
| A.5.6.2.8.2 | Test Requirements | 606 |
| A.5.6.3 | L1-RSRP measurement for beam reporting | 607 |
| A.5.6.3.1 | SSB based L1-RSRP measurement when DRX is not used | 607 |
| A.5.6.3.1.1 | Test Purpose and Environment | 607 |
| A.5.6.3.1.2 | Test parameters | 607 |
| A.5.6.3.1.3 | Test Requirements | 609 |
| A.5.6.3.2 | SSB based L1-RSRP measurement when DRX is used | 609 |
| A.5.6.3.2.1 | Test Purpose and Environment | 609 |
| A.5.6.3.2.2 | Test parameters | 610 |
| A.5.6.3.2.3 | Test Requirements | 612 |
| A.5.6.3.3 | CSI-RS based L1-RSRP measurement when DRX is not used | 612 |
| A.5.6.3.3.1 | Test Purpose and Environment | 612 |
| A.5.6.3.3.2 | Test parameters | 613 |
| A.5.6.3.3.3 | Test Requirements | 615 |
| A.5.6.3.4 | CSI-RS based L1-RSRP measurement when DRX is used | 616 |
| A.5.6.3.4.1 | Test Purpose and Environment | 616 |
| A.5.6.3.4.2 | Test parameters | 616 |
| A.5.6.3.4.3 | Test Requirements | 618 |
| A.5.7 | Measurement Performance requirements | 619 |
| A.5.7.1 | SS-RSRP | 619 |
| A.5.7.1.1 | EN-DC intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell | 619 |
| A.5.7.1.1.1 | Test Purpose and Environment | 619 |
| A.5.7.1.1.2 | Test parameters | 619 |
| A.5.7.1.1.3 | Test Requirements | 621 |
| A.5.7.1.2 | EN-DC inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell | 622 |
| A.5.7.1.2.1 | Test Purpose and Environment | 622 |

| | | |
|-------------|---|-----|
| A.5.7.1.2.2 | Test parameters..... | 622 |
| A.5.7.1.2.3 | Test Requirements..... | 624 |
| A.5.7.1.3 | EN-DC inter-frequency measurement accuracy with FR1 serving cell and FR2 target cell..... | 625 |
| A.5.7.1.3.1 | Test Purpose and Environment..... | 625 |
| A.5.7.1.3.2 | Test parameters..... | 626 |
| A.5.7.1.3.3 | Test Requirements..... | 628 |
| A.5.7.2 | SS-RSRQ..... | 628 |
| A.5.7.2.1 | EN-DC Intra-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell..... | 628 |
| A.5.7.2.1.1 | Test Purpose and Environment..... | 628 |
| A.5.7.2.1.2 | Test Parameters..... | 628 |
| A.5.7.2.1.3 | Test Requirements..... | 633 |
| A.5.7.2.2 | EN-DC Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell..... | 633 |
| A.5.7.2.2.1 | Test Purpose and Environment..... | 633 |
| A.5.7.2.2.2 | Test Parameters..... | 633 |
| A.5.7.2.2.3 | Test Requirements..... | 636 |
| A.5.7.3 | SS-SINR..... | 636 |
| A.5.7.3.1 | EN-DC Intra-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell..... | 636 |
| A.5.7.3.1.1 | Test Purpose and Environment..... | 636 |
| A.5.7.3.1.2 | Test Parameters..... | 636 |
| A.5.7.3.1.3 | Test Requirements..... | 639 |
| A.5.7.3.2 | EN-DC Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell..... | 639 |
| A.5.7.3.2.1 | Test Purpose and Environment..... | 639 |
| A.5.7.3.2.2 | Test Parameters..... | 639 |
| A.5.7.3.2.3 | Test Requirements..... | 642 |
| A.5.7.4 | L1-RSRP measurement for beam reporting..... | 642 |
| A.5.7.4.1 | SSB based L1-RSRP measurement..... | 642 |
| A.5.7.4.1.1 | Test Purpose and Environment..... | 642 |
| A.5.7.4.1.2 | Test parameters..... | 642 |
| A.5.7.4.1.3 | Test Requirements..... | 644 |
| A.5.7.4.2 | CSI-RS based L1-RSRP measurement on resource set with repetition off..... | 645 |
| A.5.7.4.2.1 | Test Purpose and Environment..... | 645 |
| A.5.7.4.2.2 | Test parameters..... | 645 |
| A.5.7.4.2.3 | Test Requirements..... | 647 |
| A.5.8 | Void..... | 648 |
| A.6 | NR standalone tests with all NR cells in FR1..... | 649 |
| A.6.1 | SA: RRC_IDLE state mobility..... | 649 |
| A.6.1.1 | Cell re-selection to NR..... | 649 |
| A.6.1.1.1 | Cell reselection to FR1 intra-frequency NR case..... | 649 |
| A.6.1.1.1.1 | Test Purpose and Environment..... | 649 |
| A.6.1.1.1.2 | Test Parameters..... | 649 |
| A.6.1.1.1.3 | Test Requirements..... | 652 |
| A.6.1.1.2 | Cell reselection to FR1 inter-frequency NR case..... | 652 |
| A.6.1.1.2.1 | Test Purpose and Environment..... | 652 |
| A.6.1.1.2.2 | Test Parameters..... | 652 |
| A.6.1.1.2.3 | Test Requirements..... | 654 |
| A.6.1.2.1 | Cell reselection to higher priority E-UTRAN..... | 655 |
| A.6.1.2.1.1 | Test Purpose and Environment..... | 655 |
| A.6.1.2.1.2 | Test Parameters..... | 655 |
| A.6.1.2.1.3 | Test Requirements..... | 658 |
| A.6.1.2.2 | Cell reselection to lower priority E-UTRAN..... | 658 |
| A.6.1.2.2.1 | Test Purpose and Environment..... | 658 |
| A.6.1.2.2.2 | Test Parameters..... | 658 |
| A.6.1.2.2.3 | Test Requirements..... | 661 |
| A.6.2 | SA: RRC_INACTIVE state mobility..... | 662 |
| A.6.3 | RRC_CONNECTED state mobility..... | 662 |
| A.6.3.1.1 | Intra-frequency handover from FR1 to FR1; known target cell..... | 662 |
| A.6.3.1.1.1 | Test Purpose and Environment..... | 662 |
| A.6.3.1.1.2 | Test Parameters..... | 662 |
| A.6.3.1.1.3 | Test Requirements..... | 664 |
| A.6.3.1.2 | Intra-frequency handover from FR1 to FR1; unknown target cell..... | 664 |

| | | |
|-------------|---|-----|
| A.6.3.1.2.1 | Test Purpose and Environment..... | 664 |
| A.6.3.1.2.2 | Test Parameters | 664 |
| A.6.3.1.2.3 | Test Requirements | 666 |
| A.6.3.1.3 | Inter-frequency handover from FR1 to FR1; unknown target cell | 666 |
| A.6.3.1.3.1 | Test Purpose and Environment..... | 666 |
| A.6.3.1.3.2 | Test Parameters | 667 |
| A.6.3.1.3.3 | Test Requirements | 668 |
| A.6.3.1.4 | SA NR - E-UTRAN handover | 669 |
| A.6.3.1.4.1 | Test Purpose and Environment..... | 669 |
| A.6.3.1.4.2 | Test Requirements | 672 |
| A.6.3.1.5 | SA NR - E-UTRAN handover with unknown target cell..... | 673 |
| A.6.3.1.5.1 | Test Purpose and Environment..... | 673 |
| A.6.3.1.5.2 | Test Requirements | 676 |
| A.6.3.2.1 | SA: RRC Re-establishment..... | 676 |
| A.6.3.2.1.1 | Intra-frequency RRC Re-establishment in FR1 | 676 |
| A.6.3.2.1.2 | Inter-frequency RRC Re-establishment in FR1 | 679 |
| A.6.3.2.1.3 | Intra-frequency RRC Re-establishment in FR1 without serving cell timing | 682 |
| A.6.3.2.2 | Random Access..... | 685 |
| A.6.3.2.2.1 | Contention based random access test in FR1 for NR standalone | 685 |
| A.6.3.2.2.2 | Non-Contention based random access test in FR1 for NR standalone | 688 |
| A.6.3.2.3.1 | Redirection from NR in FR1 to NR in FR1..... | 691 |
| A.6.3.2.3.2 | Redirection from NR in FR1 to E-UTRAN..... | 694 |
| A.6.4 | Timing..... | 697 |
| A.6.4.1.1 | NR UE Transmit Timing Test for FR1 | 697 |
| A.6.4.1.1.1 | Test Purpose and environment | 697 |
| A.6.4.1.1.2 | Test requirements | 700 |
| A.6.4.3.1 | SA FR1 timing advance adjustment accuracy..... | 701 |
| A.6.4.3.1.1 | Test Purpose and Environment..... | 701 |
| A.6.4.3.1.2 | Test Parameters | 701 |
| A.6.4.3.1.3 | Test Requirements..... | 704 |
| A.6.5 | Signalling characteristics..... | 704 |
| A.6.5.1.1 | Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode | 705 |
| A.6.5.1.1.1 | Test Purpose and Environment..... | 705 |
| A.6.5.1.1.2 | Test Requirements | 708 |
| A.6.5.1.2 | Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode | 708 |
| A.6.5.1.2.1 | Test Purpose and Environment..... | 708 |
| A.6.5.1.2.2 | Test Requirements..... | 712 |
| A.6.5.1.3 | Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode | 712 |
| A.6.5.1.3.1 | Test Purpose and Environment..... | 712 |
| A.6.5.1.3.2 | Test Requirements | 716 |
| A.6.5.1.4 | Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode..... | 716 |
| A.6.5.1.4.1 | Test Purpose and Environment..... | 716 |
| A.6.5.1.4.2 | Test Requirements | 720 |
| A.6.5.1.5 | Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode | 720 |
| A.6.5.1.5.1 | Test Purpose and Environment..... | 720 |
| A.6.5.1.5.2 | Test Requirements | 725 |
| A.6.5.1.6 | Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode | 725 |
| A.6.5.1.6.1 | Test Purpose and Environment..... | 725 |
| A.6.5.1.6.2 | Test Requirements | 729 |
| A.6.5.1.7 | Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode | 729 |
| A.6.5.1.7.1 | Test Purpose and Environment..... | 729 |
| A.6.5.1.7.2 | Test Requirements | 733 |
| A.6.5.1.8 | Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode..... | 733 |
| A.6.5.1.8.1 | Test Purpose and Environment..... | 733 |

| | | |
|-------------|---|-----|
| A.6.5.1.8.2 | Test Requirements | 737 |
| A.6.5.2.1 | Interruptions during measurements on deactivated NR SCC in FR1 | 737 |
| A.6.5.3.1 | SCell Activation and deactivation of known SCell in FR1 in non-DRX for 160ms SCell measurement cycle | 740 |
| A.6.5.3.1.1 | Test Purpose and Environment | 740 |
| A.6.5.3.1.2 | Test Requirements | 743 |
| A.6.5.3.2 | SCell Activation and deactivation of known SCell in FR1 in non-DRX for 320ms SCell measurement cycle | 743 |
| A.6.5.3.2.1 | Test Purpose and Environment | 743 |
| A.6.5.3.2.2 | Test Requirements | 744 |
| A.6.5.3.3 | SCell Activation and deactivation of unknown SCell in FR1 in non-DRX | 744 |
| A.6.5.3.3.1 | Test Purpose and Environment | 744 |
| A.6.5.3.3.2 | Test Requirements | 745 |
| A.6.5.4.1 | UE UL carrier RRC reconfiguration Delay | 745 |
| A.6.5.4.1.1 | Test Purpose and Environment | 745 |
| A.6.5.4.1.2 | Test Requirements | 751 |
| A.6.5.4.2 | Void | 751 |
| A.6.5.5.1 | Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode | 751 |
| A.6.5.5.1.1 | Test Purpose and Environment | 751 |
| A.6.5.5.1.2 | Test Requirements | 755 |
| A.6.5.5.2 | Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode | 755 |
| A.6.5.5.2.1 | Test Purpose and Environment | 755 |
| A.6.5.5.2.2 | Test Requirements | 759 |
| A.6.5.5.3 | Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in non-DRX mode | 760 |
| A.6.5.5.3.1 | Test Purpose and Environment | 760 |
| A.6.5.5.3.2 | Test Requirements | 763 |
| A.6.5.5.4 | Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode | 764 |
| A.6.5.5.4.1 | Test Purpose and Environment | 764 |
| A.6.5.5.4.2 | Test Requirements | 767 |
| A.6.5.6.1 | DCI-based and Timer-based Active BWP Switch | 767 |
| A.6.5.6.1.1 | NR FR1- NR FR1 DL active BWP switch of PCell with non-DRX in SA | 767 |
| A.6.5.6.1.2 | NR FR1 DL active BWP switch with non-DRX in SA | 771 |
| A.6.5.6.2 | RRC-based Active BWP Switch | 774 |
| A.6.5.6.2.1 | NR FR1- NR FR1 DL active BWP switch of PCell with non-DRX in SA | 774 |
| A.6.6 | Measurement procedure | 777 |
| A.6.6.1.1 | SA event triggered reporting tests without gap under non-DRX | 777 |
| A.6.6.1.1.1 | Test purpose and Environment | 777 |
| A.6.6.1.1.2 | Test parameters | 777 |
| A.6.6.1.1.3 | Test Requirements | 779 |
| A.6.6.1.2 | SA event triggered reporting tests without gap under DRX | 779 |
| A.6.6.1.2.1 | Test purpose and Environment | 779 |
| A.6.6.1.2.2 | Test parameters | 779 |
| A.6.6.1.2.3 | Test Requirements | 781 |
| A.6.6.1.3 | SA event triggered reporting tests with per-UE gaps under non-DRX | 781 |
| A.6.6.1.3.1 | Test purpose and Environment | 781 |
| A.6.6.1.3.2 | Test parameters | 781 |
| A.6.6.1.3.3 | Test Requirements | 783 |
| A.6.6.1.4 | SA event triggered reporting tests with per-UE gaps under DRX | 783 |
| A.6.6.1.4.1 | Test purpose and Environment | 783 |
| A.6.6.1.4.2 | Test parameters | 784 |
| A.6.6.1.4.3 | Test Requirements | 786 |
| A.6.6.1.5 | SA event triggered reporting tests without gap under non-DRX with SSB index reading | 786 |
| A.6.6.1.5.1 | Test purpose and Environment | 786 |
| A.6.6.1.5.2 | Test parameters | 786 |
| A.6.6.1.5.3 | Test Requirements | 788 |
| A.6.6.1.6 | SA event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading | 788 |
| A.6.6.1.6.1 | Test purpose and Environment | 788 |
| A.6.6.1.6.2 | Test parameters | 788 |

| | | |
|-------------|--|-----|
| A.6.6.1.6.3 | Test Requirements | 790 |
| A.6.6.2.1 | SA event triggered reporting tests for FR1 without SSB time index detection when DRX is not used | 790 |
| A.6.6.2.1.1 | Test Purpose and Environment..... | 790 |
| A.6.6.2.1.2 | Test Requirements..... | 793 |
| A.6.6.2.2 | SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used.... | 793 |
| A.6.6.2.2.1 | Test Purpose and Environment..... | 793 |
| A.6.6.2.2.2 | Test Requirements..... | 796 |
| A.6.6.2.3 | Void..... | 797 |
| A.6.6.2.4 | Void..... | 797 |
| A.6.6.2.5 | SA event triggered reporting tests for FR1 with SSB time index detection when DRX is not used... | 797 |
| A.6.6.2.5.1 | Test Purpose and Environment..... | 797 |
| A.6.6.2.5.2 | Test Requirements..... | 801 |
| A.6.6.2.6 | SA event triggered reporting tests for FR1 with SSB time index detection when DRX is used | 801 |
| A.6.6.2.6.1 | Test Purpose and Environment..... | 801 |
| A.6.6.2.6.2 | Test Requirements..... | 804 |
| A.6.6.2.7 | Void..... | 805 |
| A.6.6.2.8 | Void..... | 805 |
| A.6.6.3 | Inter-RAT Measurements | 805 |
| A.6.6.3.1 | SA NR - E-UTRAN event-triggered reporting in non-DRX in FR1 | 805 |
| A.6.6.3.1.1 | Test Purpose and Environment..... | 805 |
| A.6.6.3.1.2 | Test Requirements..... | 808 |
| A.6.6.3.2 | SA NR - E-UTRAN event-triggered reporting in DRX in FR1 | 808 |
| A.6.6.3.2.1 | Test Purpose and Environment..... | 808 |
| A.6.6.3.2.2 | Test Requirements..... | 812 |
| A.6.6.4 | L1-RSRP measurement for beam reporting..... | 813 |
| A.6.6.4.1 | SSB based L1-RSRP measurement when DRX is not used..... | 813 |
| A.6.6.4.1.1 | Test Purpose and Environment..... | 813 |
| A.6.6.4.1.2 | Test parameters..... | 813 |
| A.6.6.4.1.3 | Test Requirements..... | 815 |
| A.6.6.4.2 | SSB based L1-RSRP measurement when DRX is used..... | 815 |
| A.6.6.4.2.1 | Test Purpose and Environment..... | 815 |
| A.6.6.4.2.2 | Test parameters..... | 815 |
| A.6.6.4.2.3 | Test Requirements..... | 817 |
| A.6.6.4.3 | CSI-RS based L1-RSRP measurement when DRX is not used..... | 817 |
| A.6.6.4.3.1 | Test Purpose and Environment..... | 817 |
| A.6.6.4.3.2 | Test parameters..... | 818 |
| A.6.6.4.3.3 | Test Requirements..... | 820 |
| A.6.6.4.4.1 | Test Purpose and Environment..... | 820 |
| A.6.6.4.4.2 | Test parameters..... | 820 |
| A.6.6.4.4.3 | Test Requirements..... | 822 |
| A.6.6.4.4 | CSI-RS based L1-RSRP measurement when DRX is used..... | 823 |
| A.6.7 | Measurement Performance requirements | 823 |
| A.6.7.1.1 | SA: intra-frequency case measurement accuracy with FR1 serving cell and FR1 target cell | 823 |
| A.6.7.1.1.1 | Test Purpose and Environment..... | 823 |
| A.6.7.1.1.2 | Test parameters..... | 823 |
| A.6.7.1.1.3 | Test Requirements..... | 828 |
| A.6.7.1.2 | SA inter-frequency case measurement accuracy with FR1 serving cell and FR1 target cell | 828 |
| A.6.7.1.2.1 | Test Purpose and Environment..... | 828 |
| A.6.7.1.2.2 | Test parameters..... | 828 |
| A.6.7.1.2.3 | Test Requirements..... | 831 |
| A.6.7.1.3 | Void..... | 831 |
| A.6.7.2 | SS-RSRQ | 831 |
| A.6.7.2.1 | SA: Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell..... | 831 |
| A.6.7.2.1.1 | Test Purpose and Environment..... | 831 |
| A.6.7.2.1.2 | Test Parameters | 831 |
| A.6.7.2.1.3 | Test Requirements..... | 835 |
| A.6.7.2.2 | SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell..... | 835 |
| A.6.7.2.2.1 | Test Purpose and Environment..... | 835 |
| A.6.7.2.2.2 | Test Parameters | 835 |
| A.6.7.2.2.3 | Test Requirements..... | 839 |
| A.6.7.3.1 | SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell | 839 |

| | | |
|---------------|--|-----|
| A.6.7.3.1.1 | Test Purpose and Environment..... | 839 |
| A.6.7.3.1.2 | Test Parameters | 839 |
| A.6.7.3.1.3 | Test Requirements | 842 |
| A.6.7.3.2 | SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell..... | 842 |
| A.6.7.3.2.1 | Test Purpose and Environment..... | 842 |
| A.6.7.3.2.2 | Test Parameters | 842 |
| A.6.7.3.2.3 | Test Requirements | 845 |
| A.6.7.4.1 | SSB based L1-RSRP measurement..... | 846 |
| A.6.7.4.1.1 | Test Purpose and Environment..... | 846 |
| A.6.7.4.1.2 | Test parameters..... | 846 |
| A.6.7.4.1.3 | Test Requirements | 849 |
| A.6.7.4.2 | CSI-RS based L1-RSRP measurement on resource set with repetition off..... | 849 |
| A.6.7.4.2.1 | Test Purpose and Environment..... | 849 |
| A.6.7.4.2.2 | Test parameters..... | 849 |
| A.6.7.4.2.3 | Test Requirements | 852 |
| A.6.7.5.1 | SA: inter-RAT measurement accuracy with FR1 serving cell | 852 |
| A.6.7.5.1.1 | Test Purpose and Environment..... | 852 |
| A.6.7.5.1.2 | Test parameters..... | 852 |
| A.6.7.5.1.3 | Test Requirements | 856 |
| A.6.7.6.1 | SA: inter-RAT measurement accuracy with FR1 serving cell | 856 |
| A.6.7.6.1.1 | Test Purpose and Environment..... | 856 |
| A.6.7.6.1.2 | Test parameters..... | 857 |
| A.6.7.6.1.3 | Test Requirements | 860 |
| A.6.7.7.1 | SA: inter-RAT measurement accuracy with FR1 serving cell | 861 |
| A.6.7.7.1.1 | Test Purpose and Environment..... | 861 |
| A.6.7.7.1.2 | Test parameters..... | 861 |
| A.6.7.7.1.3 | Test Requirements | 865 |
| A.7 | NR standalone tests with one or more NR cells in FR2 | 865 |
| A.7.1 | SA: RRC_IDLE state mobility..... | 865 |
| A.7.1.1.1 | Cell reselection to FR2 intra-frequency NR case | 865 |
| A.7.1.1.1.1 | Test Purpose and Environment..... | 865 |
| A.7.1.1.1.2 | Test Parameters | 865 |
| A.7.1.1.1.3 | Test Requirements | 868 |
| A.7.1.1.2 | Cell reselection to FR2 inter-frequency NR case | 868 |
| A.7.1.1.2.1 | Test Purpose and Environment..... | 868 |
| A.7.1.1.2.2 | Test Parameters | 868 |
| A.7.1.1.2.3 | Test Requirements | 871 |
| A.7.2 | SA: RRC_INACTIVE state mobility | 871 |
| A.7.3 | RRC_CONNECTED state mobility | 871 |
| A.7.3.1 | Handover | 871 |
| A.7.3.1.1 | Inter-frequency handover from FR1 to FR2; unknown target cell | 871 |
| A.7.3.1.1.1 | Test Purpose and Environment..... | 871 |
| A.7.3.1.1.2 | Test Parameters | 871 |
| A.7.3.1.1.3 | Test Requirements | 874 |
| A.7.3.1.2 | Intra-frequency handover from FR2 to FR2; unknown target cell | 874 |
| A.7.3.1.2.1 | Test Purpose and Environment..... | 874 |
| A.7.3.1.2.2 | Test Parameters | 874 |
| A.7.3.1.2.3 | Test Requirements | 876 |
| A.7.3.1.3 | Inter-frequency handover from FR2 to FR2; unknown target cell | 876 |
| A.7.3.1.3.1 | Test Purpose and Environment..... | 876 |
| A.7.3.1.3.2 | Test Parameters | 876 |
| A.7.3.1.3.3 | Test Requirements | 878 |
| A.7.3.2.1 | SA: RRC Re-establishment..... | 878 |
| A.7.3.2.1.1 | Intra-frequency RRC Re-establishment in FR2..... | 878 |
| A.7.3.2.1.2 | Inter-frequency RRC Re-establishment in FR2..... | 881 |
| A.7.3.2.1.3 | Intra-frequency RRC Re-establishment in FR2 without serving cell timing | 884 |
| A.7.3.2.1.3.1 | Test Purpose and Environment | 884 |
| A.7.3.2.1.3.2 | Test Requirements | 886 |
| A.7.3.2.2 | Random Access..... | 887 |
| A.7.3.2.2.1 | Contention based random access test in FR2 for NR Standalone..... | 887 |
| A.7.3.2.2.2 | Non-contention based random access test in FR2 for NR Standalone..... | 890 |

| | | |
|-------------|--|-----|
| A.7.3.2.3 | SA: RRC Connection Release with Redirection | 894 |
| A.7.3.2.3.1 | Redirection from NR in FR2 to NR in FR2..... | 894 |
| A.7.4 | Timing | 896 |
| A.7.4.1.1 | NR UE Transmit Timing Test for FR2 | 896 |
| A.7.4.1.1.1 | Test Purpose and environment | 896 |
| A.7.4.1.1.2 | Test requirements | 899 |
| A.7.4.3.1 | SA FR2 timing advance adjustment accuracy..... | 900 |
| A.7.4.3.1.1 | Test Purpose and Environment..... | 900 |
| A.7.4.3.1.2 | Test Parameters | 900 |
| A.7.4.3.1.3 | Test Requirements | 904 |
| A.7.5 | Signaling characteristics..... | 904 |
| A.7.5.1.1 | Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode..... | 904 |
| A.7.5.1.1.1 | Test Purpose and Environment..... | 904 |
| A.7.5.1.1.2 | Test Requirements..... | 907 |
| A.7.5.1.2 | Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode | 907 |
| A.7.5.1.2.1 | Test Purpose and Environment..... | 907 |
| A.7.5.1.2.2 | Test Requirements..... | 912 |
| A.7.5.1.3 | Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode | 913 |
| A.7.5.1.3.1 | Test Purpose and Environment..... | 913 |
| A.7.5.1.3.2 | Test Requirements | 916 |
| A.7.5.1.4 | Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode..... | 916 |
| A.7.5.1.4.1 | Test Purpose and Environment..... | 916 |
| A.7.5.1.4.2 | Test Requirements..... | 920 |
| A.7.5.1.5 | Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode..... | 920 |
| A.7.5.1.5.1 | Test Purpose and Environment..... | 920 |
| A.7.5.1.5.2 | Test Requirements..... | 924 |
| A.7.5.1.6 | Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode | 924 |
| A.7.5.1.6.1 | Test Purpose and Environment..... | 924 |
| A.7.5.1.6.2 | Test Requirements | 928 |
| A.7.5.1.7 | Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode | 928 |
| A.7.5.1.7.1 | Test Purpose and Environment..... | 928 |
| A.7.5.1.7.2 | Test Requirements..... | 931 |
| A.7.5.1.8 | Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode..... | 931 |
| A.7.5.1.8.1 | Test Purpose and Environment..... | 931 |
| A.7.5.1.8.2 | Test Requirements | 935 |
| A.7.5.1.9 | UE Radio Link Monitoring Scheduling Restrictions on FR2..... | 935 |
| A.7.5.1.9.1 | Test Purpose and Environment..... | 935 |
| A.7.5.1.9.2 | Test Requirements | 936 |
| A.7.5.2.1 | Interruptions during measurements on deactivated NR SCC in FR2 | 937 |
| A.7.5.3.1 | SCell Activation and deactivation for SCell in FR2 intra-band in non-DRX | 940 |
| A.7.5.3.1.1 | Test Purpose and Environment..... | 940 |
| A.7.5.3.1.2 | Test Requirements..... | 942 |
| A.7.5.3.2 | SCell Activation and deactivation for FR1+FR2 inter-band with target SCell in FR2 | 942 |
| A.7.5.3.2.1 | Test Purpose and Environment..... | 942 |
| A.7.5.3.2.2 | Test Requirements | 945 |
| A.7.5.5.1 | Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode | 946 |
| A.7.5.5.1.1 | Test Purpose and Environment..... | 946 |
| A.7.5.5.1.2 | Test Requirements | 949 |
| A.7.5.5.2 | Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in DRX mode | 950 |
| A.7.5.5.2.1 | Test Purpose and Environment..... | 950 |
| A.7.5.5.2.2 | Test Requirements | 953 |

| | | |
|---------------|--|------|
| A.7.5.5.3 | Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in non-DRX mode | 953 |
| A.7.5.5.3.1 | Test Purpose and Environment..... | 953 |
| A.7.5.5.3.2 | Test Requirements | 958 |
| A.7.5.5.4 | Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in DRX mode..... | 958 |
| A.7.5.5.4.1 | Test Purpose and Environment..... | 958 |
| A.7.5.5.4.2 | Test Requirements | 963 |
| A.7.5.5.5 | Scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode | 964 |
| A.7.5.5.5.1 | Test Purpose and Environment..... | 964 |
| A.7.5.5.5.2 | Test Requirements | 968 |
| A.7.5.6.1 | DCI-based and Timer-based Active BWP Switch | 968 |
| A.7.5.6.1.1 | NR FR2- NR FR2 DL active BWP switch of PCell with non-DRX in SA | 968 |
| A.7.5.6.1.2 | NR FR1- NR FR2 DL active BWP switch of PCell with non-DRX in SA | 973 |
| A.7.5.6.1.3 | NR FR2 DL active BWP switch with non-DRX in SA | 977 |
| A.7.5.6.1.3.1 | Test Purpose and Environment | 977 |
| A.7.5.6.1.3.2 | Test Requirements | 980 |
| A.7.5.6.2 | RRC-based Active BWP Switch | 980 |
| A.7.5.7.1 | Addition and Release Delay of known NR PSCell | 983 |
| A.7.5.7.1.1 | Test Purpose and Environment..... | 983 |
| A.7.5.7.2 | Addition and Release Delay of unknown NR PSCell | 987 |
| A.7.5.7.2.1 | Test Purpose and Environment..... | 987 |
| A.7.5.8.1 | MAC-CE based active TCI state switch..... | 991 |
| A.7.5.8.2 | RRC based active TCI state switch | 994 |
| A.7.6 | Measurement procedure | 997 |
| A.7.6.1.1 | SA event triggered reporting test without gap under non-DRX | 997 |
| A.7.6.1.1.1 | Test purpose and Environment | 997 |
| A.7.6.1.1.2 | Test Requirements | 999 |
| A.7.6.1.2 | SA event triggered reporting test without gap under DRX | 999 |
| A.7.6.1.2.1 | Test purpose and Environment..... | 999 |
| A.7.6.1.2.2 | Test Requirements | 1002 |
| A.7.6.1.3 | SA event triggered reporting test with per-UE gaps under non-DRX..... | 1002 |
| A.7.6.1.3.1 | Test purpose and Environment | 1002 |
| A.7.6.1.3.2 | Test Requirements | 1004 |
| A.7.6.1.4 | SA event triggered reporting test with per-UE gaps under DRX | 1005 |
| A.7.6.1.4.1 | Test purpose and Environment | 1005 |
| A.7.6.1.4.2 | Test Requirements | 1007 |
| A.7.6.2.1 | SA event triggered reporting tests For FR2 without SSB time index detection when DRX is not used (PCell in FR2)..... | 1008 |
| A.7.6.2.1.1 | Test Purpose and Environment..... | 1008 |
| A.7.6.2.1.2 | Test Requirements | 1012 |
| A.7.6.2.2 | SA event triggered reporting tests For FR2 without SSB time index detection when DRX is used (PCell in FR2) | 1012 |
| A.7.6.2.2.1 | Test Purpose and Environment..... | 1012 |
| A.7.6.2.2.2 | Test Requirements | 1015 |
| A.7.6.2.3 | SA event triggered reporting tests For FR2 with SSB time index detection when DRX is not used (PCell in FR2) | 1015 |
| A.7.6.2.3.1 | Test Purpose and Environment..... | 1015 |
| A.7.6.2.3.2 | Test Requirements | 1019 |
| A.7.6.2.4 | SA event triggered reporting tests For FR2 with SSB time index detection when DRX is used (PCell in FR2) | 1019 |
| A.7.6.2.4.1 | Test Purpose and Environment..... | 1019 |
| A.7.6.2.4.2 | Test Requirements | 1022 |
| A.7.6.2.5 | SA event triggered reporting tests for FR2 without SSB time index detection when DRX is not used (PCell in FR1)..... | 1022 |
| A.7.6.2.5.1 | Test Purpose and Environment..... | 1022 |
| A.7.6.2.5.2 | Test Requirements | 1025 |
| A.7.6.2.6 | SA event triggered reporting tests for FR2 without SSB time index detection when DRX is used (PCell in FR1) | 1025 |
| A.7.6.2.6.1 | Test Purpose and Environment..... | 1025 |
| A.7.6.2.6.2 | Test Requirements | 1029 |

| | | |
|-------------|--|------|
| A.7.6.2.7 | SA event triggered reporting tests for FR2 with SSB time index detection when DRX is not used (PCell in FR1) | 1030 |
| A.7.6.2.7.1 | Test Purpose and Environment..... | 1030 |
| A.7.6.2.7.2 | Test Requirements..... | 1033 |
| A.7.6.2.8 | SA event triggered reporting tests for FR2 with SSB time index detection when DRX is used (PCell in FR1) | 1033 |
| A.7.6.2.8.1 | Test Purpose and Environment..... | 1033 |
| A.7.6.2.8.2 | Test Requirements..... | 1037 |
| A.7.6.3 | L1-RSRP measurement for beam reporting..... | 1037 |
| A.7.6.3.1 | SSB based L1-RSRP measurement when DRX is not used..... | 1037 |
| A.7.6.3.1.1 | Test Purpose and Environment..... | 1037 |
| A.7.6.3.1.2 | Test parameters..... | 1038 |
| A.7.6.3.1.3 | Test Requirements..... | 1040 |
| A.7.6.3.2 | SSB based L1-RSRP measurement when DRX is used..... | 1040 |
| A.7.6.3.2.1 | Test Purpose and Environment..... | 1040 |
| A.7.6.3.2.2 | Test parameters..... | 1041 |
| A.7.6.3.2.3 | Test Requirements..... | 1043 |
| A.7.6.3.3 | CSI-RS based L1-RSRP measurement when DRX is not used..... | 1043 |
| A.7.6.3.3.1 | Test Purpose and Environment..... | 1043 |
| A.7.6.3.3.2 | Test parameters..... | 1044 |
| A.7.6.3.3.3 | Test Requirements..... | 1046 |
| A.7.6.3.4 | CSI-RS based L1-RSRP measurement when DRX is used..... | 1047 |
| A.7.6.3.4.1 | Test Purpose and Environment..... | 1047 |
| A.7.6.3.4.2 | Test parameters..... | 1047 |
| A.7.6.3.4.3 | Test Requirements..... | 1049 |
| A.7.7 | Measurement Performance requirements | 1050 |
| A.7.7.1.1 | SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell | 1050 |
| A.7.7.1.1.1 | Test Purpose and Environment..... | 1050 |
| A.7.7.1.1.2 | Test parameters..... | 1050 |
| A.7.7.1.1.3 | Test Requirements..... | 1053 |
| A.7.7.1.2 | SA inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell | 1053 |
| A.7.7.1.2.1 | Test Purpose and Environment..... | 1053 |
| A.7.7.1.2.2 | Test parameters..... | 1054 |
| A.7.7.1.2.3 | Test Requirements..... | 1057 |
| A.7.7.1.3 | SA inter-frequency measurement accuracy with FR1 serving cell and FR2 target cell | 1057 |
| A.7.7.1.3.1 | Test Purpose and Environment..... | 1057 |
| A.7.7.1.3.2 | Test parameters..... | 1058 |
| A.7.7.1.3.3 | Test Requirements..... | 1060 |
| A.7.7.2 | SS-RSRQ..... | 1060 |
| A.7.7.2.1 | SA intra-frequency measurement accuracy with FR2 serving cell and FR2 target cell | 1060 |
| A.7.7.2.1.1 | Test Purpose and Environment..... | 1060 |
| A.7.7.2.1.2 | Test Parameters | 1060 |
| A.7.7.2.1.3 | Test Requirements..... | 1064 |
| A.7.7.2.2 | SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell..... | 1064 |
| A.7.7.2.2.1 | Test Purpose and Environment..... | 1064 |
| A.7.7.2.2.2 | Test Parameters | 1064 |
| A.7.7.2.2.3 | Test Requirements..... | 1067 |
| A.7.7.3.1 | SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell | 1067 |
| A.7.7.3.1.1 | Test Purpose and Environment..... | 1067 |
| A.7.7.3.1.2 | Test Parameters | 1067 |
| A.7.7.3.1.3 | Test Requirements..... | 1069 |
| A.7.7.3.2 | SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell..... | 1070 |
| A.7.7.3.2.1 | Test Purpose and Environment..... | 1070 |
| A.7.7.3.2.2 | Test Parameters | 1070 |
| A.7.7.3.2.3 | Test Requirements..... | 1073 |
| A.7.7.4.1 | SSB based L1-RSRP measurement..... | 1073 |
| A.7.7.4.1.1 | Test Purpose and Environment..... | 1073 |
| A.7.7.4.1.2 | Test parameters..... | 1073 |
| A.7.7.4.1.3 | Test Requirements..... | 1075 |
| A.7.7.4.2 | CSI-RS based L1-RSRP measurement on resource set with repetition off..... | 1076 |
| A.7.7.4.2.1 | Test Purpose and Environment..... | 1076 |
| A.7.7.4.2.2 | Test parameters..... | 1076 |

| | | |
|-------------|--|------|
| A.7.7.4.2.3 | Test Requirements | 1078 |
| A.8 | E-UTRA standalone tests for NR RRM | 1079 |
| A.8.1 | Void..... | 1079 |
| A.8.2 | RRC_IDLE state mobility | 1079 |
| A.8.2.1 | Inter-RAT NR Cell re-selection..... | 1079 |
| A.8.2.1.1 | E-UTRA Cell reselection to higher priority NR target Cell in FR1 | 1079 |
| A.8.2.1.1.1 | Test Purpose and Environment..... | 1079 |
| A.8.2.1.1.2 | Test Requirements..... | 1082 |
| A.8.3 | RRC_CONNECTED state mobility | 1083 |
| A.8.3.1 | Handover | 1083 |
| A.8.3.1.1 | E-UTRAN - NR handover in FR1..... | 1083 |
| A.8.3.1.1.1 | Test Purpose and Environment..... | 1083 |
| A.8.3.1.1.2 | Test Requirements | 1086 |
| A.8.4 | Measurement procedure | 1087 |
| A.8.4.1.1 | E-UTRA – NR Inter-RAT SFTD Measurement Delay in non-DRX | 1087 |
| A.8.4.1.1.1 | Test Purpose and Environment..... | 1087 |
| A.8.4.1.1.2 | Test Requirements | 1090 |
| A.8.4.1.2 | E-UTRA – NR Inter-RAT SFTD Measurement Delay in DRX | 1090 |
| A.8.4.1.2.1 | Test Purpose and Environment..... | 1090 |
| A.8.4.1.2.2 | Test Requirements | 1091 |
| A.8.4.2 | E-UTRA – NR Inter-RAT Measurements | 1091 |
| A.8.4.2.1 | NR Inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used | 1091 |
| A.8.4.2.1.1 | Test Purpose and Environment..... | 1091 |
| A.8.4.2.1.2 | Test Requirements | 1095 |
| A.8.4.2.2 | NR Inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used | 1096 |
| A.8.4.2.2.1 | Test Purpose and Environment..... | 1096 |
| A.8.4.2.2.2 | Test Requirements | 1099 |
| A.8.4.2.3 | NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used | 1100 |
| A.8.4.2.3.1 | Test Purpose and Environment..... | 1100 |
| A.8.4.2.3.2 | Test Requirements | 1103 |
| A.8.4.2.4 | NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used..... | 1104 |
| A.8.4.2.4.1 | Test Purpose and Environment..... | 1104 |
| A.8.4.2.4.2 | Test Requirements | 1107 |
| A.8.4.2.5 | NR Inter-RAT event triggered reporting tests for FR2 without SSB time index detection when DRX is not used | 1108 |
| A.8.4.2.5.1 | Test Purpose and Environment..... | 1108 |
| A.8.4.2.5.2 | Test Requirements | 1110 |
| A.8.4.2.6 | NR Inter-RAT event triggered reporting tests for FR2 without SSB time index detection when DRX is used | 1111 |
| A.8.4.2.6.1 | Test Purpose and Environment..... | 1111 |
| A.8.4.2.6.2 | Test Requirements | 1113 |
| A.8.4.2.7 | NR Inter-RAT event triggered reporting tests for FR2 with SSB time index detection when DRX is not used | 1114 |
| A.8.4.2.7.1 | Test Purpose and Environment..... | 1114 |
| A.8.4.2.7.2 | Test Requirements | 1116 |
| A.8.4.2.8 | NR Inter-RAT event triggered reporting tests for FR2 with SSB time index detection when DRX is used..... | 1117 |
| A.8.4.2.8.1 | Test Purpose and Environment..... | 1117 |
| A.8.4.2.8.2 | Test Requirements | 1119 |
| A.8.5 | Measurement performance | 1120 |
| A.8.5.1.1 | SFTD accuracy..... | 1120 |
| A.8.5.1.1.1 | Test Purpose | 1120 |
| A.8.5.1.1.2 | Test Environment | 1120 |
| A.8.5.1.1.3 | Test Requirements | 1124 |
| A.8.5.2 | E-UTRA – NR Inter-RAT Measurement Performance requirements..... | 1124 |
| A.8.5.2.1 | SS-RSRP | 1124 |
| A.8.5.2.1.1 | E-UTRAN – NR inter-RAT measurements with FR1 target cell | 1124 |

| | | |
|---------------|--|------|
| A.8.5.2.1.2 | E-UTRAN – NR inter-RAT measurements with FR2 target cell | 1128 |
| A.8.5.2.1.2.1 | Test Purpose and Environment | 1128 |
| A.8.5.2.1.2.2 | Test Parameters | 1128 |
| A.8.5.2.1.2.3 | Test Requirements | 1130 |
| A.8.5.2.2 | SS-RSRQ | 1130 |
| A.8.5.2.2.1 | E-UTRAN – NR inter-RAT measurements with FR1 target cell | 1130 |
| A.8.5.2.2.2 | E-UTRAN – NR inter-RAT measurements with FR2 target cell | 1134 |
| A.8.5.2.2.2.1 | Test Purpose and Environment | 1134 |
| A.8.5.2.2.2.2 | Test Parameters | 1134 |
| A.8.5.2.2.2.3 | Test Requirements | 1136 |
| A.8.5.2.3 | SS-SINR | 1137 |
| A.8.5.2.3.1 | E-UTRAN – NR inter-RAT measurements with FR1 target cell | 1137 |
| A.8.5.2.3.2 | E-UTRAN – NR inter-RAT measurements with FR2 target cell | 1140 |
| A.8.5.2.3.2.1 | Test Purpose and Environment | 1140 |
| A.8.5.2.3.2.2 | Test Parameters | 1140 |
| A.8.5.2.3.2.3 | Test Requirements | 1142 |

Annex B (normative): Conditions for RRM requirements applicability for operating bands .1143

| | | |
|-----------|---|------|
| B.1 | Conditions for NR RRC_IDLE state mobility | 1143 |
| B.1.1 | Introduction | 1143 |
| B.1.2 | Conditions for measurements on NR intra-frequency cells for cell re-selection | 1143 |
| B.1.3 | Conditions for measurements on NR inter-frequency cells for cell re-selection | 1144 |
| B.2 | Conditions for UE measurements procedures and performance requirements in RRC_CONNECTED state | 1145 |
| B.2.1 | Introduction | 1145 |
| B.2.1.1 | General | 1145 |
| B.2.1.2 | Derivation of Minimum SSB_RP values for FR1 | 1145 |
| B.2.1.3 | Derivation of Minimum SSB_RP values for FR2 | 1145 |
| B.2.1.3.1 | Minimum SSB_RP values for Rx Beam Peak angle of arrival | 1145 |
| B.2.1.4 | Gain to SS-RSRP measurement point for FR1 | 1146 |
| B.2.1.5 | Gain to SS-RSRP measurement point for FR2 | 1147 |
| B.2.1.5.1 | Gain to SS-RSRP measurement point for Rx Beam Peak angle of arrival | 1147 |
| B.2.2 | Conditions for NR intra-frequency measurements | 1147 |
| B.2.3 | Conditions for NR inter-frequency measurements | 1148 |
| B.2.4 | Conditions for NR L1-RSRP reporting | 1150 |
| B.2.4.1 | Conditions for SSB based L1-RSRP reporting | 1150 |
| B.2.4.2 | Conditions for CSI-RS based L1-RSRP reporting | 1151 |
| B.2.5 | Conditions for RRC connection release with redirection to NR | 1152 |
| B.2.6 | Conditions for UE transmit timing | 1153 |
| B.2.6.1 | Conditions for SSB based UE transmit timing | 1153 |
| B.2.6.2 | Void | 1154 |
| B.3 | RRM Requirements Exceptions | 1154 |
| B.3.1 | Introduction | 1154 |
| B.3.2 | Receiver sensitivity relaxation for CA | 1154 |
| B.3.2.1 | Receiver sensitivity relaxation for UE supporting CA in FR1 | 1154 |
| B.3.2.2 | Receiver sensitivity relaxation for UE configured with CA in FR1 | 1154 |
| B.3.2.2.1 | Inter-band carrier aggregation | 1154 |
| B.3.2.2.2 | Reference sensitivity exceptions due to UL harmonic interference for CA | 1154 |
| B.3.2.2.3 | Reference sensitivity exceptions due to intermodulation interference due to 2UL CA | 1155 |
| B.3.2.3 | Receiver sensitivity relaxation for UE supporting CA in FR2 | 1155 |
| B.3.2.4 | Receiver sensitivity relaxation for UE configured with CA in FR2 | 1155 |
| B.3.2.4.1 | Intra-band contiguous carrier aggregation | 1155 |
| B.3.2.4.2 | Intra-band non-contiguous carrier aggregation | 1155 |
| B.3.3 | Receiver sensitivity relaxation for DC | 1155 |
| B.3.3.1 | Receiver sensitivity relaxation for EN-DC | 1155 |
| B.3.3.2 | Receiver sensitivity relaxation for NE-DC | 1155 |
| B.3.4 | Receiver sensitivity relaxation for SUL | 1155 |
| B.3.4.1 | Receiver sensitivity relaxation for UE supporting SUL in FR1 | 1155 |
| B.3.4.2 | Receiver sensitivity relaxation for UE configured with SUL in FR1 | 1156 |
| B.3.4.2.1 | Reference sensitivity exceptions due to UL harmonic interference for SUL | 1156 |

Annex C (informative): **Change history**1157
History1162

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document specifies requirements for support of Radio Resource Management for the FDD and TDD modes of New Radio (NR). These requirements include requirements on measurements in NR and the UE as well as requirements on node dynamical behaviour and interaction, in terms of delay and response characteristics.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TS 38.304: "NR; User Equipment (UE) procedures in idle mode".
- [2] 3GPP TS 38.331: "NR; Radio Resource Control (RRC); Protocol specification".
- [3] 3GPP TS 38.213: "NR; Physical layer procedures for control".
- [4] 3GPP TS 38.215: "NR; Physical layer measurements".
- [5] 3GPP TS 38.533: "NR; User Equipment (UE) conformance specification; Radio Resource Management (RRM)".
- [6] 3GPP TS 38.211: "NR; Physical channels and modulation".
- [7] 3GPP TS 38.321: "NR; Medium Access Control (MAC) protocol specification".
- [8] 3GPP TS 38.212: "NR; Multiplexing and channel coding".
- [9] 3GPP TS 38.202: "NR; Physical layer services provided by the physical layer".
- [10] 3GPP TS 38.300: "NR; Overall description; Stage-2".
- [11] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [12] 3GPP TS 38.423: "NG-RAN; Xn Application Protocol (XnAP)".
- [13] 3GPP TS 38.104: "NR; Base Station (BS) radio transmission and reception".
- [14] 3GPP TS 38.306: "NR; User Equipment (UE) radio access capabilities".
- [15] 3GPP TS 36.133: "Evolved Universal Terrestrial Radio Access (E-UTRA); Requirements for support of radio resource management".
- [16] 3GPP TS 36.331: "Evolved Universal Terrestrial Radio Access (E-UTRA); Radio Resource Control (RRC) protocol specification".
- [17] 3GPP TS 37.340: "Evolved Universal Terrestrial Radio Access (E-UTRA) and NR; Multi-connectivity", Stage 2.
- [18] 3GPP TS 38.101-1: "NR; User Equipment (UE) radio transmission and reception; Part 1: Range 1 Standalone".
- [19] 3GPP TS 38.101-2: "NR; User Equipment (UE) radio transmission and reception; Part 2: Range 2 Standalone".

- [20] 3GPP TS 38.101-3: "NR; User Equipment (UE) radio transmission and reception; Part 3: Range 1 and Range 2 Interworking operation with other radios".
- [21] 3GPP TS 38.101-4: "NR; User Equipment (UE) radio transmission and reception; Part 4: Performance requirements".
- [22] 3GPP TS 38.305: "NG Radio Access Network (NG-RAN); Stage 2 functional specification of User Equipment (UE) positioning in NG-RAN".
- [23] 3GPP TS 36.211: "Evolved Universal Terrestrial Radio Access (E-UTRA); Physical Channels and Modulation".
- [24] 3GPP TS 36.300: "Evolved Universal Terrestrial Radio Access (E-UTRA); Overall description".
- [25] 3GPP TS 36.101: "Technical Specification Group Radio Access Network; Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) radio transmission and reception".
- [26] 3GPP TS 38.214: "NR; Physical layer procedures for data".
- [27] 3GPP TS 36.355: "Evolved Universal Terrestrial Radio Access (E-UTRA); LTE Positioning Protocol (LPP)".
- [28] Void.

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in TR 21.905 [11] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in TR 21.905 [11].

Active DL BWP: Active DL bandwidth part as defined in TS 38.213 [3].

Blackbox Approach: Testing methodology, in which the UE internal implementation of certain specific UE functionality involved in the test, is unknown.

Control Resource Set: As defined in TS 38.213 [3].

DL BWP: DL bandwidth part as defined in TS 38.213 [3].

EN-DC: E-UTRA-NR Dual Connectivity as defined in clause 4.1.2 of TS 37.340 [17].

en-gNB: As defined in TS 37.340 [17].

FR1: Frequency range 1 as defined in clause 5.1 of TS 38.104 [13].

FR2: Frequency range 2 as defined in clause 5.1 of TS 38.104 [13].

gNB: as defined in TS 38.300 [10].

Master Cell Group: As defined in TS 38.331 [2].

Multi-Radio Dual Connectivity: Dual Connectivity between E-UTRA and NR nodes, or between two NR nodes, as defined in TS 37.340 [17].

ng-eNB: As defined in TS 38.300 [10].

NE-DC: NR-E-UTRA Dual Connectivity as defined in clause 4.1.3.2 of TS 37.340 [17].

NGEN-DC: NG-RAN E-UTRA-NR Dual Connectivity as defined in clause 4.1.3.1 of TS 37.340 [17].

NR-DC: NR-NR Dual Connectivity as defined in clause 4.1.3.3 of TS 37.340 [17].

Primary Cell: As defined in TS 38.331 [2].

Quasi Co-Location: As defined in TS 38.214 [26].

RLM-RS resource: A resource out of the set of resources configured for RLM by higher layer parameter RLM-RS-List [2] as defined in TS 38.213 [3].

SA operation mode: Operation mode when the UE is configured with at least PCell and not any MR-DC.

Secondary Cell: As defined in TS 38.331 [2].

Secondary Cell Group: As defined in TS 38.331 [2].

Serving Cell: As defined in TS 38.331 [2].

SMTTC: An SSB-based measurement timing configuration configured by *SSB-MeasurementTimingConfiguration* as specified in TS 38.331 [2].

Special Cell: As defined in TS 38.331 [2].

SSB: SS/PBCH block as defined in clause 7.8.3 of TS 38.211 [6].

Timing Advance Group: As defined in TS 38.331 [2].

3.2 Symbols

For the purposes of the present document, the following symbols apply:

| | |
|-------|--|
| [...] | Values included in square bracket must be considered for further studies, because it means that a decision about that value was not taken. |
| T_c | Basic time unit, defined in clause 4.1 of TS 38.211 [6]. |
| T_s | Reference time unit, defined in clause 4.1 of TS 38.211 [6]. |

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [11] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [11].

| | |
|---------|----------------------------------|
| BFD | Beam Failure Detection |
| BFD-RS | BFD Reference Signal |
| BLER | Block Error Rate |
| BM-RS | Beam Management Reference Signal |
| BWP | Bandwidth Part |
| CA | Carrier Aggregation |
| CBD | Candidate Beam Detection |
| CC | Component Carrier |
| CORESET | Control Resource Set |
| CP | Cyclic Prefix |
| CSI | Channel-State Information |
| CSI-RS | CSI Reference Signal |
| DC | Dual Connectivity |
| DCI | Downlink Control Information |
| DL | Downlink |
| DMRS | Demodulation Reference Signal |
| DRX | Discontinuous Reception |
| E-CID | Enhanced Cell ID |
| E-UTRA | Evolved UTRA |
| E-UTRAN | Evolved UTRAN |
| EN-DC | E-UTRA-NR Dual Connectivity |
| FDD | Frequency Division Duplex |
| FR | Frequency Range |

| | |
|--------------------|--|
| HARQ | Hybrid Automatic Repeat Request |
| HO | Handover |
| L1-RSRP | Layer 1 RSRP |
| MAC | Medium Access Control |
| MCG | Master Cell Group |
| MG | Measurement Gap |
| MGL | Measurement Gap Length |
| MGRP | Measurement Gap Repetition Period |
| MIB | Master Information Block |
| MN | Master Node |
| MR-DC | Multi-Radio Dual Connectivity |
| NE-DC | NR-E-UTRA Dual Connectivity |
| NGEN-DC | NG-RAN E-UTRA-NR Dual Connectivity |
| NR | New Radio |
| NR-DC | NR-NR Dual Connectivity |
| OFDM | Orthogonal Frequency Division Multiplexing |
| OFDMA | Orthogonal Frequency Division Multiple Access |
| OTDOA | Observed Time Difference Of Arrival |
| PBCH | Physical Broadcast Channel |
| PCC | Primary Component Carrier |
| PCell | Primary Cell |
| PDCCH | Physical Downlink Control Channel |
| PDSCH | Physical Downlink Shared Channel |
| PLMN | Public Land Mobile Network |
| PRACH | Physical RACH |
| PSCell | Primary SCell |
| PSS | Primary Synchronization Signal |
| pTAG | Primary Timing Advance Group |
| PUCCH | Physical Uplink Control Channel |
| PUSCH | Physical Uplink Shared Channel |
| QCL | Quasi Co-Location |
| RACH | Random Access Channel |
| RAT | Radio Access Technology |
| RLM | Radio Link Monitoring |
| RLM-RS | Reference Signal for RLM |
| RMSI | Remaining Minimum System Information |
| RRC | Radio Resource Control |
| RRM | Radio Resource Management |
| RSSI | Received Signal Strength Indicator |
| RSTD | Reference Signal Time Difference |
| SA | Standalone operation mode |
| SCC | Secondary Component Carrier |
| SCell | Secondary Cell |
| SCG | Secondary Cell Group |
| SCS | Subcarrier Spacing |
| SCS _{SSB} | SSB subcarrier spacing |
| SDL | Supplementary Downlink |
| SFN | System Frame Number |
| SFTD | SFN and Frame Timing Difference |
| SI | System Information |
| SIB | System Information Block |
| SMTC | SSB-based Measurement Timing configuration |
| SpCell | Special Cell |
| SRS | Sounding Reference Signal |
| SS-RSRP | Synchronization Signal based Reference Signal Received Power |
| SS-RSRQ | Synchronization Signal based Reference Signal Received Quality |
| SS-SINR | Synchronization Signal based Signal to Noise and Interference Ratio |
| SSB | Synchronization Signal Block |
| SSB _{RP} | Received (linear) average power of the resource elements that carry NR SSB signals and channels, measured at the UE antenna connector. |
| SSS | Secondary Synchronization Signal |
| sTAG | Secondary Timing Advance Group |

| | |
|-----|--------------------------------------|
| SUL | Supplementary Uplink |
| TA | Timing Advance |
| TAG | Timing Advance Group |
| TCI | Transmission Configuration Indicator |
| TDD | Time Division Duplex |
| TTI | Transmission Time Interval |
| UE | User Equipment |
| UL | Uplink |

3.4 Test tolerances

The requirements given in the present document make no allowance for measurement uncertainty. The test specification 38.533 [5] defines the test tolerances.

3.5 Frequency bands grouping

3.5.1 Introduction

The intention with the frequency band grouping below is to increase the readability of the specification.

The frequency bands grouping is derived based on UE REFSSENS requirements specified in [18, 19, 20] and assuming 0.5 dB step between the neighbour groups. The groups are defined in the order of increasing REFSSENS, i.e., the group A has the smallest REFSSENS among the groups. For the same SCS and a given bandwidth, the bands within the same group have the same Io conditions in a corresponding requirement in this specification, provided the bands support this SCS. For different SCSs supported by a frequency band and the same bandwidth, different Io conditions may apply for the frequency band in the requirements, while the band group is the same, based on the lowest REFSSENS requirement normalized by the number of subcarriers among its supported SCSs for this bandwidth. For the same SCS but different supported bandwidths, the group for a band is determined based on the lowest REFSSENS requirement normalized by the number of subcarriers among its supported bandwidths.

3.5.2 NR operating bands in FR1

NR frequency bands grouping for FR1 is specified in Table 3.5.2-1.

Table 3.5.2-1: NR frequency band groups for FR1

| Group | NR FDD | | NR TDD | | NR SDL | |
|-------|---------------------|---------------------------|---------------------|------------------------------|---------------------|-----------------|
| | Band group notation | Operating bands | Band group notation | Operating bands | Band group notation | Operating bands |
| A | NR_FDD_FR1_A | n1, n70, n74 ⁴ | NR_TDD_FR1_A | n34, n38, n39, n40, n50, n51 | NR_SDL_FR1_A | n75, n76 |
| B | NR_FDD_FR1_B | n66, n74 ³ | NR_TDD_FR1_B | - | NR_SDL_FR1_B | - |
| C | NR_FDD_FR1_C | - | NR_TDD_FR1_C | n77 ¹ , n78, n79 | NR_SDL_FR1_C | - |
| D | NR_FDD_FR1_D | n28 | NR_TDD_FR1_D | n77 ² | NR_SDL_FR1_D | - |
| E | NR_FDD_FR1_E | n2, n5, n7 | NR_TDD_FR1_E | n41 | NR_SDL_FR1_E | - |
| F | NR_FDD_FR1_F | - | NR_TDD_FR1_F | - | NR_SDL_FR1_F | - |
| G | NR_FDD_FR1_G | n3, n8, n12, n20, n71 | NR_TDD_FR1_G | - | NR_SDL_FR1_G | - |
| H | NR_FDD_FR1_H | n25 | NR_TDD_FR1_H | - | NR_SDL_FR1_H | - |

NOTE 1: Except 3.8 GHz to 4.2 GHz.
NOTE 2: Only 3.8 GHz to 4.2 GHz.
NOTE 3: Except 1475.9 MHz to 1510.9 MHz.
NOTE 4: Only when the band is confined in 1475.9 MHz to 1510.9 MHz.
NOTE 5: These bands are used only in NR carrier aggregation with other NR bands according to NR CA band combinations specified in TS 38.101-1 [18] and TS 38.101-3 [20].

3.5.3 NR operating bands in FR2

NR frequency bands grouping for FR2 is specified in Table 3.5.3-1.

Table 3.5.3-1: NR frequency band groups for FR2

| Group | Band group notation | Operating bands |
|--|---------------------|---|
| A | NR_TDD_FR2_A | n257 ¹ , n258 ¹ , n261 ¹ |
| B | NR_TDD_FR2_B | n257 ⁴ , n258 ⁴ , n261 ⁴ |
| C | NR_TDD_FR2_C | |
| D | NR_TDD_FR2_D | |
| E | NR_TDD_FR2_E | |
| F | NR_TDD_FR2_F | n260 ⁴ |
| G | NR_TDD_FR2_G | n260 ¹ |
| H | NR_TDD_FR2_H | |
| I | NR_TDD_FR2_I | |
| J | NR_TDD_FR2_J | |
| K | NR_TDD_FR2_K | |
| L | NR_TDD_FR2_L | n257 ² , n258 ² , n261 ² |
| M | NR_TDD_FR2_M | |
| N | NR_TDD_FR2_N | |
| O | NR_TDD_FR2_O | |
| P | NR_TDD_FR2_P | |
| Q | NR_TDD_FR2_Q | |
| R | NR_TDD_FR2_R | |
| S | NR_TDD_FR2_S | |
| T | NR_TDD_FR2_T | n257 ³ , n258 ³ , n261 ³ |
| U | NR_TDD_FR2_U | |
| V | NR_TDD_FR2_V | |
| W | NR_TDD_FR2_W | |
| X | NR_TDD_FR2_X | |
| Y | NR_TDD_FR2_Y | n260 ³ |
| NOTE 1: UE power class 1. NOTE 2: UE power class 2. NOTE 3: UE power class 3. NOTE 4: UE power class 4. | | |

3.6 Applicability of requirements in this specification version

In this specification,

- ‘cell’, ‘PCell’, ‘PSCell’ and ‘SCell’ refer to NR cell, NR PCell, NR PSCell, and NR SCell,
- E-UTRA cells are referred to as ‘E-UTRA cell’, ‘E-UTRA PCell’, ‘E-UTRA PSCell’, and ‘E-UTRA SCell’,
- E-UTRA-NR dual connectivity where E-UTRA is the master is referred to as ‘E-UTRA-NR dual connectivity’ or ‘EN-DC’.
- NR-NR dual connectivity which involves two gNB acting as Master gNB and Secondary gNB is referred to as “NR-NR dual connectivity” or “NR-DC”. NR-DC in Rel-15 only includes the scenarios where all serving cells in MCG in FR1 and all serving cells in SCG in FR2.
- ‘active serving cell’ refers to PCell, PSCell and activated SCells

For UE configured with supplementary UL, the requirements in clause 7.1 and 7.3 shall also apply to uplink transmissions on supplementary UL.

3.6.1 RRC connected state requirements in DRX

For the requirements in RRC connected state specified in this version of the specification, the UE shall assume that no DRX is used provided the following conditions are met:

- DRX parameters are not configured or
- DRX parameters are configured and
 - *drx-InactivityTimer* is running or

- *drx-RetransmissionTimerDL* is running or
- *drx-RetransmissionTimerUL* is running or
- *ra-ContentionResolutionTimer* is running or
- a Scheduling Request sent on PUCCH is pending or
- a PDCCH indicating a new transmission addressed to the C-RNTI of the MAC entity has not been received after successful reception of a Random Access Response for the preamble not selected by the MAC entity

Otherwise the UE shall assume that DRX is used.

3.6.2 Number of serving carriers

3.6.2.1 Number of serving carriers for SA

Requirements for standalone NR with NR PCell are applicable for the UE configured with the following number of serving NR CCs:

- up to 8 NR DL CCs in total, with 1 UL (or 2 UL if SUL is configured) in PCell and up to 1 UL (or 2 UL if SUL is configured) in SCell.
- SUL may be configured together with one of the UL

3.6.2.2 Number of serving carriers for EN-DC

Requirements for EN-DC operation of E-UTRA and NR with E-UTRA PCell and NR PSCell are applicable for the UE configured with the following number of serving NR CCs:

- up to 7 NR DL CCs in total, with 1 UL (or 2 UL if SUL is configured) in PSCell and up to 1 UL (or 2 UL if SUL is configured) in SCell in different FR with PSCell.
- SUL may be configured together with one of the UL

The applicable number of E-UTRA CC for EN-DC in the MCG for both UL and DL is specified in TS 36.133 [15].

3.6.2.3 Number of serving carriers for NE-DC

Requirements for NE-DC operation of NR and E-UTRA with NR PCell and E-UTRA PSCell are applicable for the UE configured with the following number of serving NR CCs:

- up to 7 NR DL CCs in total, with 1 UL (or 2 UL if SUL is configured) in PCell and up to 1 UL (or 2 UL if SUL is configured) in SCell.
- SUL may be configured together with one of the UL

The applicable number of E-UTRA CC for NE-DC in the SCG for both UL and DL is specified in TS 36.133 [15].

3.6.2.4 Number of serving carriers for NR-DC

Requirements for NR-DC are applicable for the UE configured with the following number of serving NR CCs:

- up to 2 NR DL CCs in total in FR1, up to 8 NR DL CCs in total in FR2, with 1 in PCell, 1 UL in PSCell, and up to 1 UL in each SCell.

3.6.3 Applicability for intra-band FR2

For the requirements in RRC connected state specified in this version of the specification, UE shall assume that the transmitted signals from the serving cells should have the same downlink spatial domain transmission filter on one OFDM symbol in the same band in FR2. Otherwise, the UE is not supposed to satisfy any requirements for SCell.

3.6.4 Applicability for FR2 UE power classes

For the requirements of each FR2 power class specified in this version of the specification, certain UE types with specific device architectures are assumed. The UE types can be found in TS 38.101-2 [19].

3.6.5 Applicability for SDL bands

The measurements accuracy requirements for SDL bands in this version of specification in clause 10.1 shall apply for NR intra-frequency measurements on SCC (SS-RSRP, SS-RSRQ, SS-SINR, and L1-RSRP) and inter-frequency measurements (SS-RSRP, SS-RSRQ, and SS-SINR).

3.6.6 Applicability of requirements for NGEN-DC operation

All the requirements in this specification applicable for EN-DC are also applicable for NGEN-DC.

3.6.7 Applicability of QCL

For the requirements specified in this version of the specification, a reference signal is considered to be QCLed to another reference signal if it is in the same TCI chain as the other reference signal, provided that the number of Reference Signals in the chain is no more than 4. It is assumed there is single QCL type per TCI chain.

A TCI chain consists of an SSB, and one or more CSI-RS resources, and the TCI state of each Reference Signal includes another Reference Signal in the same TCI chain.

DMRS of PDCCH or PDSCH is QCLed with the reference signal in its active TCI state and any other reference signal that is QCLed, based on above criteria, with the reference signal in the active TCI state.

4 SA: RRC_IDLE state mobility

4.1 Cell Selection

After a UE has switched on and a PLMN has been selected, the cell selection process takes place, as described in TS 38.304 [1]. This process allows the UE to select a suitable cell where to camp on in order to access available services. In this process, the UE can use stored information (*Stored information cell selection*) or not (*Initial cell selection*).

4.2 Cell Re-selection

4.2.1 Introduction

The cell reselection procedure allows the UE to select a more suitable cell and camp on it.

When the UE is in either *Camped Normally* state or *Camped on Any Cell* state on a cell, the UE shall attempt to detect, synchronise, and monitor intra-frequency, inter-frequency and inter-RAT cells indicated by the serving cell. For intra-frequency and inter-frequency cells the serving cell may not provide explicit neighbour list but carrier frequency information and bandwidth information only. UE measurement activity is also controlled by measurement rules defined in TS 38.304 [1], allowing the UE to limit its measurement activity.

In the requirements of clause 4.2, the exceptions for side conditions apply as follows:

- for the UE capable of CA, the applicable exceptions for side conditions are specified in Annex B, clause B.3.2.1, B.3.2.3, or B.3.2.5 for UE supporting CA in FR1, CA in FR2 and CA between FR1 and FR2, respectively;
- for the UE capable of SUL, the applicable exceptions for side conditions are specified in Annex B, clause B.3.4.1 for UE supporting SUL in FR1.

4.2.2 Requirements

4.2.2.1 UE measurement capability

For idle mode cell re-selection purposes, the UE shall be capable of monitoring at least:

- Intra-frequency carrier, and
- Depending on UE capability, 7 NR inter-frequency carriers, and
- Depending on UE capability, 7 FDD E-UTRA inter-RAT carriers, and
- Depending on UE capability, 7 TDD E-UTRA inter-RAT carriers.

In addition to the requirements defined above, a UE supporting E-UTRA measurements in RRC_IDLE state shall be capable of monitoring a total of at least 14 carrier frequency layers, which includes serving layer, comprising of any above defined combination of E-UTRA FDD, E-UTRA TDD and NR layers.

4.2.2.2 Measurement and evaluation of serving cell

The UE shall measure the SS-RSRP and SS-RSRQ level of the serving cell and evaluate the cell selection criterion S defined in TS 38.304 [1] for the serving cell at least once every $M1 \cdot N1$ DRX cycle; where:

$M1=2$ if SMTC periodicity (T_{SMTC}) > 20 ms and DRX cycle \leq 0.64 second,

otherwise $M1=1$.

The UE shall filter the SS-RSRP and SS-RSRQ measurements of the serving cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by, at least DRX cycle/2.

If the UE has evaluated according to Table 4.2.2.2-1 in N_{serv} consecutive DRX cycles that the serving cell does not fulfil the cell selection criterion S, the UE shall initiate the measurements of all neighbour cells indicated by the serving cell, regardless of the measurement rules currently limiting UE measurement activities.

If the UE in RRC_IDLE has not found any new suitable cell based on searches and measurements using the intra-frequency, inter-frequency and inter-RAT information indicated in the system information for 10 s, the UE shall initiate cell selection procedures for the selected PLMN as defined in TS 38.304 [1].

Table 4.2.2.2-1: N_{serv}

| DRX cycle length [s] | Scaling Factor (N1) | | N_{serv} [number of DRX cycles] |
|--|---------------------|----------------------|-----------------------------------|
| | FR1 | FR2 ^{Note1} | |
| 0.32 | 1 | 8 | $M1 \cdot N1 \cdot 4$ |
| 0.64 | | 5 | $M1 \cdot N1 \cdot 4$ |
| 1.28 | | 4 | $N1 \cdot 2$ |
| 2.56 | | 3 | $N1 \cdot 2$ |
| Note 1: Applies for UE supporting power class 2&3&4. For UE supporting power class 1, $N1 = 8$ for all DRX cycle length. | | | |

4.2.2.3 Measurements of intra-frequency NR cells

The UE shall be able to identify new intra-frequency cells and perform SS-RSRP and SS-RSRQ measurements of the identified intra-frequency cells without an explicit intra-frequency neighbour list containing physical layer cell identities.

The UE shall be able to evaluate whether a newly detectable intra-frequency cell meets the reselection criteria defined in TS38.304[1] within T_{detect,NR_Intra} when that $T_{reselection}=0$. An intra frequency cell is considered to be detectable according to the conditions defined in Annex B.1.2 for a corresponding Band.

The UE shall measure SS-RSRP and SS-RSRQ at least every $T_{measure,NR_Intra}$ (see table 4.2.2.3-1) for intra-frequency cells that are identified and measured according to the measurement rules.

The UE shall filter SS-RSRP and SS-RSRQ measurements of each measured intra-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{\text{measure,NR_Intra}}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an intra-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the intra-frequency cell has met reselection criterion defined in TS38.304 [1] within $T_{\text{evaluate,NR_Intra}}$ when $T_{\text{reselection}} = 0$ as specified in table 4.2.2.3-1 provided that:

when *rangeToBestCell* is not configured:

- the cell is at least 3 dB better ranked in FR1 or 4.5 dB better ranked in FR2.

when *rangeToBestCell* is configured:

- the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value in TS38.304 [1] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.
- if there are multiple such cells, the cell has the highest rank among them.
- the cell is at least 3dB better ranked in FR1 or 4.5dB better ranked in FR2 if the current serving cell is among them.

When evaluating cells for reselection, the SSB side conditions apply to both serving and non-serving intra-frequency cells.

If $T_{\text{reselection}}$ timer has a non zero value and the intra-frequency cell is satisfied with the reselection criteria which are defined in TS38.304 [1], the UE shall evaluate this intra-frequency cell for the $T_{\text{reselection}}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

Table 4.2.2.3-1: $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$

| DRX cycle length [s] | Scaling Factor (N1) | | $T_{\text{detect,NR_Intra}}$ [s] (number of DRX cycles) | $T_{\text{measure,NR_Intra}}$ [s] (number of DRX cycles) | $T_{\text{evaluate,NR_Intra}}$ [s] (number of DRX cycles) |
|--|---------------------|----------------------|---|--|---|
| | FR1 | FR2 ^{Note1} | | | |
| 0.32 | 1 | 8 | $11.52 \times N1 \times M2$ (36 x N1 x M2) | $1.28 \times N1 \times M2$ (4 x N1 x M2) | $5.12 \times N1 \times M2$ (16 x N1 x M2) |
| 0.64 | | 5 | $17.92 \times N1$ (28 x N1) | $1.28 \times N1$ (2 x N1) | $5.12 \times N1$ (8 x N1) |
| 1.28 | | 4 | $32 \times N1$ (25 x N1) | $1.28 \times N1$ (1 x N1) | $6.4 \times N1$ (5 x N1) |
| 2.56 | | 3 | $58.88 \times N1$ (23 x N1) | $2.56 \times N1$ (1 x N1) | $7.68 \times N1$ (3 x N1) |
| Note 1: Applies for UE supporting power class 2&3&4. For UE supporting power class 1, N1 = 8 for all DRX cycle length. | | | | | |
| Note 2: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. | | | | | |

4.2.2.4 Measurements of inter-frequency NR cells

The UE shall be able to identify new inter-frequency cells and perform SS-RSRP or SS-RSRQ measurements of identified inter-frequency cells if carrier frequency information is provided by the serving cell, even if no explicit neighbour list with physical layer cell identities is provided.

If $S_{\text{rxlev}} > S_{\text{nonIntraSearchP}}$ and $S_{\text{qual}} > S_{\text{nonIntraSearchQ}}$ then the UE shall search for inter-frequency layers of higher priority at least every $T_{\text{higher_priority_search}}$ where $T_{\text{higher_priority_search}}$ is described in clause 4.2.2.7.

If $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$ then the UE shall search for and measure inter-frequency layers of higher, equal or lower priority in preparation for possible reselection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority layers shall be the same as that defined below in this clause.

The UE shall be able to evaluate whether a newly detectable inter-frequency cell meets the reselection criteria defined in TS38.304 [1] within $K_{\text{carrier}} * T_{\text{detect,NR_Inter}}$ if at least carrier frequency information is provided for inter-frequency neighbour cells by the serving cells when $T_{\text{reselection}} = 0$ provided that the reselection criteria is met by a margin of at least 5 dB in FR1 or 6.5 dB in FR2 for reselections based on ranking or 6 dB in FR1 or 7.5 dB in FR2 for SS-RSRP

reselections based on absolute priorities or 4 dB in FR1 and 4 dB in FR2 for SS-RSRQ reselections based on absolute priorities. The parameter K_{carrier} is the number of NR inter-frequency carriers indicated by the serving cell. An inter-frequency cell is considered to be detectable according to the conditions defined in Annex B.1.3 for a corresponding Band.

When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{\text{measure,NR_Inter}}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this clause shall still be met by the UE before it makes any determination that it may stop measuring the cell. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall measure SS-RSRP or SS-RSRQ at least every $K_{\text{carrier}} * T_{\text{measure,NR_Inter}}$ (see table 4.2.2.4-1) for identified lower or equal priority inter-frequency cells. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall filter SS-RSRP or SS-RSRQ measurements of each measured higher, lower and equal priority inter-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{\text{measure,NR_Inter}}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an inter-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the inter-frequency cell has met reselection criterion defined TS 38.304 [1] within $K_{\text{carrier}} * T_{\text{evaluate,NR_Inter}}$ when $T_{\text{reselection}} = 0$ as specified in table 4.2.2.4-1 provided that the reselection criteria is met by

- the condition when performing equal priority reselection and when *rangeToBestCell* is not configured:
 - the cell is at least 5dB better ranked in FR1 or 6.5dB better ranked in FR2 or.
- when *rangeToBestCell* is configured:
 - the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value in TS38.304 [1] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.
 - if there are multiple such cells, the cell has the highest rank among them
 - the cell is at least 5dB better ranked in FR1 or 6.5dB better ranked in FR2 if the current serving cell is among them. Or
 - 6dB in FR1 or 7.5dB in FR2 for SS-RSRP reselections based on absolute priorities or
 - 4dB in FR1 or 4dB in FR2 for SS-RSRQ reselections based on absolute priorities.

When evaluating cells for reselection, the SSB side conditions apply to both serving and inter-frequency cells.

If $T_{\text{reselection}}$ timer has a non zero value and the inter-frequency cell is satisfied with the reselection criteria, the UE shall evaluate this inter-frequency cell for the $T_{\text{reselection}}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

The UE is not expected to meet the measurement requirements for an inter-frequency carrier under DRX cycle=320 ms defined in Table 4.2.2.4-1 under the following conditions:

- $T_{\text{SMTC_intra}} = T_{\text{SMTC_inter}} = 160$ ms; where $T_{\text{SMTC_intra}}$ and $T_{\text{SMTC_inter}}$ are periodicities of the SMTC occasions configured for the intra-frequency carrier and the inter-frequency carrier respectively, and
- SMTC occasions configured for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the SMTC occasions configured for the intra-frequency carrier, and

- SMTC occasions configured for the intra-frequency carrier and for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the paging occasion in TS38.304 [1].

Table 4.2.2.4-1: $T_{\text{detect,NR_Inter}}$, $T_{\text{measure,NR_Inter}}$ and $T_{\text{evaluate,NR_Inter}}$

| DRX cycle length [s] | Scaling Factor (N1) | | $T_{\text{detect,NR_Inter}}$ [s] (number of DRX cycles) | $T_{\text{measure,NR_Inter}}$ [s] (number of DRX cycles) | $T_{\text{evaluate,NR_Inter}}$ [s] (number of DRX cycles) |
|--|---------------------|----------------------|---|--|---|
| | FR1 | FR2 ^{Note1} | | | |
| 0.32 | 1 | 8 | $11.52 \times N1 \times 1.5$ (36 x N1 x 1.5) | $1.28 \times N1 \times 1.5$ (4 x N1 x 1.5) | $5.12 \times N1 \times 1.5$ (16 x N1 x 1.5) |
| 0.64 | | 5 | $17.92 \times N1$ (28 x N1) | $1.28 \times N1$ (2 x N1) | $5.12 \times N1$ (8 x N1) |
| 1.28 | | 4 | $32 \times N1$ (25 x N1) | $1.28 \times N1$ (1 x N1) | $6.4 \times N1$ (5 x N1) |
| 2.56 | | 3 | $58.88 \times N1$ (23 x N1) | $2.56 \times N1$ (1 x N1) | $7.68 \times N1$ (3 x N1) |
| Note 1: Applies for UE supporting power class 2&3&4. For UE supporting power class 1, N1 = 8 for all DRX cycle length. | | | | | |

4.2.2.5 Measurements of inter-RAT E-UTRAN cells

If $S_{\text{rxlev}} > S_{\text{nonIntraSearchP}}$ and $S_{\text{qual}} > S_{\text{nonIntraSearchQ}}$ then the UE shall search for inter-RAT E-UTRAN layers of higher priority at least every $T_{\text{higher_priority_search}}$ where $T_{\text{higher_priority_search}}$ is described in clause 4.2.2

If $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$ then the UE shall search for and measure inter-RAT E-UTRAN layers of higher, lower priority in preparation for possible reselection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority inter-RAT E-UTRAN layers shall be the same as that defined below for lower priority RATs.

The requirements in this clause apply for inter-RAT E-UTRAN FDD measurements and E-UTRA TDD measurements. When the measurement rules indicate that inter-RAT E-UTRAN cells are to be measured, the UE shall measure RSRP and RSRQ of detected E-UTRA cells in the neighbour frequency list at the minimum measurement rate specified in this clause. The parameter $N_{\text{EUTRA_carrier}}$ is the total number of configured E-UTRA carriers in the neighbour frequency list. The UE shall filter RSRP and RSRQ measurements of each measured E-UTRA cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{\text{measure,EUTRAN}}/2$.

An inter-RAT E-UTRA cell is considered to be detectable provided the following conditions are fulfilled:

- the same conditions as for inter-frequency RSRP measurements specified in TS 36.133 [15, Annex B.1.2] are fulfilled for a corresponding Band, and
- the same conditions as for inter-frequency RSRQ measurements specified in TS 36.133 [15, Annex B.1.2] are fulfilled for a corresponding Band.
- SCH conditions specified in TS 36.133 [15, Annex B.1.2] are fulfilled for a corresponding Band

The UE shall be able to evaluate whether a newly detectable inter-RAT E-UTRAN cell meets the reselection criteria defined in TS38.304 [1] within $(N_{\text{EUTRA_carrier}}) * T_{\text{detect,EUTRAN}}$ when $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$ when $T_{\text{reselection}} = 0$ provided that the reselection criteria is met by a margin of at least 6dB for RSRP reselections based on absolute priorities or 4dB for RSRQ reselections based on absolute priorities.

Cells which have been detected shall be measured at least every $(N_{\text{EUTRA_carrier}}) * T_{\text{measure,EUTRAN}}$ when $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$.

When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{\text{measure,EUTRAN}}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this clause shall still be met by the UE before it makes any determination that it may stop measuring the cell.

If the UE detects on an inter-RAT E-UTRAN carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall not consider an inter-RAT E-UTRA cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For a cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that an already identified inter-RAT E-UTRA cell has met reselection criterion defined in TS 38.304 [1] within $(N_{\text{EUTRA_carrier}}) * T_{\text{evaluate,EUTRAN}}$ when $T_{\text{reselection}} = 0$ as specified in table 4.2.2.5-1 provided that the reselection criteria is met by a margin of at least 6dB for RSRP reselections based on absolute priorities or 4dB for RSRQ reselections based on absolute priorities.

If $T_{\text{reselection}}$ timer has a non zero value and the inter-RAT E-UTRA cell is satisfied with the reselection criteria which are defined in TS 38.304 [1], the UE shall evaluate this E-UTRA cell for the $T_{\text{reselection}}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

Table 4.2.2.5-1: $T_{\text{detect,EUTRAN}}$, $T_{\text{measure,EUTRAN}}$, and $T_{\text{evaluate,EUTRAN}}$

| DRX cycle length [s] | $T_{\text{detect,EUTRAN}}$ [s] (number of DRX cycles) | $T_{\text{measure,EUTRAN}}$ [s] (number of DRX cycles) | $T_{\text{evaluate,EUTRAN}}$ [s] (number of DRX cycles) |
|----------------------|---|--|---|
| 0.32 | 11.52 (36) | 1.28 (4) | 5.12 (16) |
| 0.64 | 17.92 (28) | 1.28 (2) | 5.12 (8) |
| 1.28 | 32(25) | 1.28 (1) | 6.4 (5) |
| 2.56 | 58.88 (23) | 2.56 (1) | 7.68 (3) |

4.2.2.6 Maximum interruption in paging reception

UE shall perform the cell re-selection with minimum interruption in monitoring downlink channels for paging reception.

At intra-frequency and inter-frequency cell re-selection, the UE shall monitor the downlink of serving cell for paging reception until the UE is capable to start monitoring downlink channels of the target intra-frequency and inter-frequency cell for paging reception. The interruption time shall not exceed $T_{\text{SI-NR}} + 2 * T_{\text{target_cell_SMTC_period}}$ ms.

At inter-RAT cell re-selection, the UE shall monitor the downlink of serving cell for paging reception until the UE is capable to start monitoring downlink channels for paging reception of the target inter-RAT cell. For NR to E-UTRAN cell re-selection the interruption time must not exceed $T_{\text{SI-EUTRA}} + 55$ ms.

$T_{\text{SI-NR}}$ is the time required for receiving all the relevant system information data according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 38.331 [2] for an NR cell.

$T_{\text{SI-EUTRA}}$ is the time required for receiving all the relevant system information data according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 36.331 [16] for an E-UTRAN cell.

These requirements assume sufficient radio conditions, so that decoding of system information can be made without errors and does not take into account cell re-selection failure.

4.2.2.7 General requirements

The UE shall search every layer of higher priority at least every $T_{\text{higher_priority_search}} = (60 * N_{\text{layers}})$ seconds, where N_{layers} is the total number of higher priority NR and E-UTRA carrier frequencies broadcasted in system information.

5 SA: RRC_INACTIVE state mobility

5.1 Cell Re-selection

5.1.1 Introduction

The cell reselection procedure allows the UE to select a more suitable cell and camp on it.

When the UE is in *Camped Normally* state on a cell, the UE shall attempt to detect, synchronise, and monitor intra-frequency, inter-frequency and inter-RAT cells indicated by the serving cell. For intra-frequency and inter-frequency cells the serving cell may not provide explicit neighbour list but carrier frequency information and bandwidth information only. UE measurement activity is also controlled by measurement rules defined in TS38.304 [1], allowing the UE to limit its measurement activity.

5.1.2 Requirements

5.1.2.1 UE measurement capability

The requirements in sub-clause 4.2.2.1 shall apply.

5.1.2.2 Measurement and evaluation of serving cell

The requirements in sub-clause 4.2.2.2 shall apply.

5.1.2.3 Measurements of intra-frequency NR cells

The requirements in sub-clause 4.2.2.3 shall apply.

5.1.2.4 Measurements of inter-frequency NR cells

The requirements in sub-clause 4.2.2.4 shall apply.

5.1.2.5 Measurements of inter-RAT E-UTRAN cells

The requirements in sub-clause 4.2.2.5 shall apply.

5.1.2.6 Maximum interruption in paging reception

The requirements in sub-clause 4.2.2.6 shall apply.

5.1.2.7 General requirements

The requirements in sub-clause 4.2.2.7 shall apply.

5.2 Void

6 RRC_CONNECTED state mobility

6.1 Handover

6.1.1 NR Handover

6.1.1.1 Introduction

The purpose of NR handover is to change the NR PCell to another NR cell. The requirements in this clause are applicable to SA NR, NE-DC and NR-DC.

6.1.1.2 NR FR1 - NR FR1 Handover

The requirements in this clause are applicable to both intra-frequency and inter-frequency handovers from NR FR1 cell to NR FR1 cell.

6.1.1.2.1 Handover delay

When the UE receives a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within D_{handover} msec from the end of the last TTI containing the RRC command.

Where:

D_{handover} equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [2] plus the interruption time stated in clause 6.1.1.2.2.

6.1.1.2.2 Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When intra-frequency or inter-frequency handover is commanded, the interruption time shall be less than $T_{\text{interrupt}}$

$$T_{\text{interrupt}} = T_{\text{search}} + T_{\text{IU}} + T_{\text{processing}} + T_{\Delta} + T_{\text{margin}} \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then $T_{\text{search}} = 0$ ms. If the target cell is an unknown intra-frequency cell and the target cell $E_s/I_{\text{ot}} \geq -2$ dB, then $T_{\text{search}} = T_{\text{rs}}$ ms. If the target cell is an unknown inter-frequency cell and the target cell $E_s/I_{\text{ot}} \geq -2$ dB, then $T_{\text{search}} = 3 * T_{\text{rs}}$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{\text{rs}}$.

$T_{\text{processing}}$ is time for UE processing. $T_{\text{processing}}$ can be up to 20ms.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{\text{rs}}$.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise T_{rs} is the SMTC configured in the `measObjectNR` having the

same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with $T_{rs}=5\text{ms}$ assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell..

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in Clause 9.2.5 for intra-frequency handover and Clause 9.3.4 for inter-frequency handover.

6.1.1.3 NR FR2- NR FR1 Handover

The requirements in this clause are applicable to inter-frequency handovers from NR FR2 cell to NR FR1 cell.

6.1.1.3.1 Handover delay

When the UE receives a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within D_{handover} ms from the end of the last TTI containing the RRC command.

Where:

D_{handover} equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [2] plus the interruption time stated in clause 6.1.1.3.2.

6.1.1.3.2 Interruption time

The interruption time is the time between the end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When intra-frequency or inter-frequency handover is commanded, the interruption time shall be less than $T_{\text{interrupt}}$

$$T_{\text{interrupt}} = T_{\text{search}} + T_{\text{IU}} + T_{\text{processing}} + T_{\Delta} + T_{\text{margin}} \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then $T_{\text{search}} = 0$ ms. If the target cell is an unknown inter-frequency cell and the target cell $E_s/I_{ot} \geq -2$ dB, then $T_{\text{search}} = 3 * T_{rs}$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{rs}$.

$T_{\text{processing}}$ is time for UE processing. $T_{\text{processing}}$ can be up to 40ms.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with $T_{rs}=5\text{ms}$ assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms.

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in Clause 9.2.5 for intra-frequency handover and Clause 9.3.4 for inter-frequency handover.

6.1.1.4 NR FR2- NR FR2 Handover

The requirements in this clause are applicable to both intra-frequency and inter-frequency handovers from NR FR2 cell to NR FR2 cell.

6.1.1.4.1 Handover delay

When the UE receives a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within D_{handover} ms from the end of the last TTI containing the RRC command.

Where:

D_{handover} equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [2] plus the interruption time stated in clause 6.1.1.4.2.

6.1.1.4.2 Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When intra-frequency or inter-frequency handover is commanded, the interruption time shall be less than $T_{\text{interrupt}}$

$$T_{\text{interrupt}} = T_{\text{search}} + T_{\text{IU}} + T_{\text{processing}} + T_{\Delta} + T_{\text{margin}} \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the handover command is received by the UE. If the target cell is a known cell, then $T_{\text{search}} = 0$ ms. If the target cell is an unknown intra-frequency cell and the target cell $E_s/I_{ot} \geq -2$ dB, then $T_{\text{search}} = 8 * T_{\text{rs}}$ ms. If the target cell is an unknown inter-frequency cell and the target cell $E_s/I_{ot} \geq -2$ dB, then $T_{\text{search}} = 8 * 3 * T_{\text{rs}}$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

$T_{\text{processing}}$ is time for UE processing. $T_{\text{processing}}$ can be up to 20ms.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{\text{rs}}$ for both known and unknown target cell.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with $T_{\text{rs}}=5\text{ms}$ assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

In FR2, the target cell is known if it has been meeting the following conditions:

- During the last 5 seconds before the reception of the handover command:
 - the UE has sent a valid measurement report for the target cell and
 - One of the SSBs measured from the NR target cell being configured remains detectable according to the cell identification conditions specified in clause 9.3,
- One of the SSBs measured from the target cell also remains detectable during the handover delay according to the cell identification conditions specified in clause 9.3.

otherwise it is unknown.

6.1.1.5 NR FR1- NR FR2 Handover

The requirements in this clause are applicable to inter-frequency handovers from NR FR1 cell to NR FR2 cell.

6.1.1.5.1 Handover delay

When the UE receives a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within D_{handover} ms from the end of the last TTI containing the RRC command.

Where:

D_{handover} equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [2] plus the interruption time stated in clause 6.1.1.5.2.

6.1.1.5.2 Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When inter-frequency handover is commanded, the interruption time shall be less than $T_{\text{interrupt}}$

$$T_{\text{interrupt}} = T_{\text{search}} + T_{\text{IU}} + T_{\text{processing}} + T_{\Delta} + T_{\text{margin}} \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the handover command is received by the UE. If the target cell is a known cell, then $T_{\text{search}} = 0$ ms. . If the target cell is an unknown inter-frequency cell and the target cell $E_s/I_{ot} \geq -2$ dB, then $T_{\text{search}} = 8 * 3 * T_{\text{rs}}$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

$T_{\text{processing}}$ is time for UE processing. $T_{\text{processing}}$ can be up to 40ms.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{\text{rs}}$ for both known and unknown target cell.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with $T_{\text{rs}}=5$ ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms.

In FR2, the target cell is known if it has been meeting the following conditions:

- During the last 5 seconds before the reception of the handover command:
 - the UE has sent a valid measurement report for the target cell and
 - One of the SSBs measured from the NR target cell being configured remains detectable according to the cell identification conditions specified in clause 9.3,
- One of the SSBs measured from the target cell also remains detectable during the handover delay according to the cell identification conditions specified in clause 9.3.

otherwise it is unknown.

6.1.2 NR Handover to other RATs

6.1.2.1 NR – E-UTRAN Handover

6.1.2.1.1 Introduction

The purpose of inter-RAT handover from NR to E-UTRAN is to change the radio access mode of PCell from NR to E-UTRAN. The handover procedure is initiated from NR with a RRC message that implies a handover as described in TS 38.331 [2]. The requirements in this clause are applicable to SA NR, NE-DC and NR-DC.

6.1.2.1.2 Handover delay

When the UE receives a RRC message implying handover to E-UTRAN the UE shall be ready to start the transmission of the uplink PRACH channel in E-UTRA within D_{handover} ms from the end of the last TTI containing the RRC command. D_{handover} is defined as

$$D_{\text{handover}} = T_{\text{RRC_procedure_delay}} + T_{\text{interrupt}}$$

Where:

$T_{\text{RRC_procedure_delay}}$: it is the RRC procedure delay, which is 50ms

$T_{\text{interrupt}}$: it is the time between end of the last TTI containing the RRC command on the NR PDSCH and the time the UE starts transmission of the PRACH in E-UTRAN, excluding $T_{\text{RRC_procedure_delay}}$. $T_{\text{interrupt}}$ is defined in clause 6.1.2.1.3.

6.1.2.1.3 Interruption time

When the inter-RAT handover to E-UTRAN is commanded, the interruption time shall be less than $T_{\text{interrupt}}$

$$T_{\text{interrupt}} = T_{\text{search}} + T_{\text{IU}} + 20 \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then $T_{\text{search}} = 0$ ms. If the target cell is unknown and signal quality is sufficient for successful cell detection on the first attempt, then $T_{\text{search}} = 80$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to 30 ms.

NOTE: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant E-UTRAN cell identification requirements are described in clause 9.4.1.

6.2 RRC Connection Mobility Control

6.2.1 SA: RRC Re-establishment

6.2.1.1 Introduction

This clause contains requirements on the UE regarding RRC connection re-establishment procedure. RRC connection re-establishment is initiated when a UE in RRC_CONNECTED state loses RRC connection due to any of failure cases, including radio link failure, handover failure, and RRC connection reconfiguration failure. The RRC connection re-establishment procedure is specified in clause 5.3.7 of TS 38.331 [2].

The requirements in this clause are applicable for RRC connection re-establishment to NR cell.

6.2.1.2 Requirements

In RRC_CONNECTED state the UE shall be capable of sending *RRCReestablishmentRequest* message within $T_{re-establish_delay}$ seconds from the moment it detects a loss in RRC connection. The total RRC connection delay ($T_{re-establish_delay}$) shall be less than:

$$T_{re-establish_delay} = T_{UE_re-establish_delay} + T_{UL_grant}$$

T_{UL_grant} : It is the time required to acquire and process uplink grant from the target PCell. The uplink grant is required to transmit *RRCReestablishmentRequest* message.

The UE re-establishment delay ($T_{UE_re-establish_delay}$) is specified in clause 6.2.1.2.1.

6.2.1.2.1 UE Re-establishment delay requirement

The UE re-establishment delay ($T_{UE_re-establish_delay}$) is the time between the moments when any of the conditions requiring RRC re-establishment as defined in clause 5.3.7 in TS 38.331 [2] is detected by the UE and when the UE sends PRACH to the target PCell. The UE re-establishment delay ($T_{UE_re-establish_delay}$) requirement shall be less than:

$$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

The intra-frequency target NR cell shall be considered detectable if each relevant SSB can satisfy that:

- SS-RSRP related side conditions given in clause 10.1.2 and 10.1.3 are fulfilled for a corresponding NR Band for FR1 and FR2, respectively, and
- the conditions of SSB_RP and SSB \hat{E}_s/I_{ot} according to Annex B.2.2 for a corresponding NR Band are fulfilled.

The inter-frequency target NR cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in clause 10.1.4 and 10.1.5 are fulfilled for a corresponding NR Band for FR1 and FR2, respectively, and
- the conditions of SSB_RP and SSB \hat{E}_s/I_{ot} according to Annex B.2.3 for a corresponding NR Band are fulfilled.

$T_{identify_intra_NR}$: It is the time to identify the target intra-frequency NR cell and it depends on whether the target NR cell is known cell or unknown cell and on the FR of the target NR cell. If the UE is not configured with intra-frequency NR carrier for RRC re-establishment then $T_{identify_intra_NR}=0$; otherwise $T_{identify_intra_NR}$ shall not exceed the values defined in Table 6.2.1.2.1-1.

$T_{identify_inter_NR,i}$: It is the time to identify the target inter-frequency NR cell on inter-frequency carrier i configured for RRC re-establishment and it depends on whether the target NR cell is known cell or unknown cell and on the FR of the target NR cell. $T_{identify_inter_NR,i}$ shall not exceed the values defined in Table 6.2.1.2.1-2.

T_{SMTC} : It is the periodicity of the SMTC occasion configured for the intra-frequency carrier. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2*, T_{smtc} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

$T_{SMTC,i}$: It is the periodicity of the SMTC occasion configured for the inter-frequency carrier i . If it is not configured, the UE may assume that the target SSB periodicity is no larger than 20 ms.

T_{SI-NR} : It is the time required for receiving all the relevant system information according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 38.331 [2] for the target NR cell.

T_{PRACH} : It is the delay uncertainty in acquiring the first available PRACH occasion in the target NR cell. T_{PRACH} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

N_{freq} : It is the total number of NR frequencies to be monitored for RRC re-establishment; $N_{freq} = 1$ if the target intra-frequency NR cell is known, else $N_{freq} = 2$ and $T_{identify_intra_NR} = 0$ if the target inter-frequency NR cell is known.

There is no requirement if the target cell does not contain the UE context.

In the requirement defined in the below tables, the target FR1 cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown.

Table 6.2.1.2.1-1: Time to identify target NR cell for RRC connection re-establishment to NR intra-frequency cell

| Serving cell SSB \hat{E}_s/lot (dB) | FR of target NR cell | $T_{\text{identify_intra_NR}}$ [ms] | |
|--|----------------------|---|---|
| | | Known NR cell | Unknown NR cell |
| ≥ -8 | FR1 | MAX (200 ms, $5 \times T_{\text{SMTc}}$) | MAX (800 ms, $10 \times T_{\text{SMTc}}$) |
| ≥ -8 | FR2 | N/A | MAX (1000 ms, $80 \times T_{\text{SMTc}}$) |
| < -8 | FR1 | N/A | 800 ^{Note1} |
| < -8 | FR2 | N/A | 3520 ^{Note1} |

Note 1: The UE is not required to successfully identify a cell on any NR frequency layer when $T_{\text{SMTc}} > 20$ ms and serving cell SSB $\hat{E}_s/\text{lot} < -8$ dB.

Table 6.2.1.2.1-2: Time to identify target NR cell for RRC connection re-establishment to NR inter-frequency cell

| Serving cell SSB \hat{E}_s/lot (dB) | FR of target NR cell | $T_{\text{identify_inter_NR, i}}$ [ms] | |
|--|----------------------|--|---|
| | | Known NR cell | Unknown NR cell |
| ≥ -8 | FR1 | MAX (200 ms, $6 \times T_{\text{SMTc, i}}$) | MAX (800 ms, $13 \times T_{\text{SMTc, i}}$) |
| ≥ -8 | FR2 | N/A | MAX (1000 ms, $104 \times T_{\text{SMTc, i}}$) |
| < -8 | FR1 | N/A | 800 ^{Note1} |
| < -8 | FR2 | N/A | 4000 ^{Note1} |

Note 1: The UE is not required to successfully identify a cell on any NR frequency layer when $T_{\text{SMTc, i}} > 20$ ms and serving cell SSB $\hat{E}_s/\text{lot} < -8$ dB.

6.2.2 Random access

6.2.2.1 Introduction

This clause contains requirements on the UE regarding random access procedure. The random access procedure is initiated to establish uplink time synchronization for a UE which either has not acquired or has lost its uplink synchronization, or to convey UE's request Other SI, or for beam failure recovery. The random access is specified in clause 8 of TS 38.213 [3] and the control of the RACH transmission is specified in clause 5.1 of TS 38.321 [7].

6.2.2.2 Requirements

The UE shall have capability to calculate PRACH transmission power according to the PRACH power formula defined in TS 38.213 [3] and apply this power level at the first preamble or additional preambles. The absolute power applied to the first preamble shall have an accuracy as specified in Table 6.3.4.2-1 of TS 38.101-1 [18] for FR1 and in Table 6.3.4.2-1 of TS 38.101-2 [19] for FR2. The relative power applied to additional preambles shall have an accuracy as specified in Table 6.3.4.3-1 of TS 38.101-1 [18] for FR1 and clause 6.3.4.3 of TS 38.101-2 [19] for FR2.

The UE shall indicate a random access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in clause 5.1.4 in TS 38.321 [7].

The requirements in this clause apply for UE in SA operation mode or any MR-DC operation mode.

6.2.2.2.1 Contention based random access

6.2.2.2.1.1 Correct behaviour when transmitting Random Access Preamble

With the UE selected SSB with SS-RSRP above $rsrp\text{-ThresholdSSB}$, UE shall have the capability to select a Random Access Preamble randomly with equal probability from the Random Access Preambles associated with the selected SSB if the association between Random Access Preambles and SSB is configured, as specified in clause 5.1.2 in TS 38.321 [7].

With the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB*, UE shall have the capability to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, if the association between PRACH occasions and SSBs is configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

6.2.2.2.1.2 Correct behaviour when receiving Random Access Response

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

6.2.2.2.1.3 Correct behaviour when not receiving Random Access Response

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window defined in clause 5.1.4 in TS 38.321 [7].

6.2.2.2.1.4 Correct behaviour when receiving an UL grant for msg3 retransmission

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

6.2.2.2.1.5 SA: Correct behaviour when receiving a message over Temporary C-RNTI

The UE shall send ACK if the Contention Resolution is successful.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

6.2.2.2.1.6 Correct behaviour when contention Resolution timer expires

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

6.2.2.2.2 Non-Contention based random access

6.2.2.2.2.1 Correct behaviour when transmitting Random Access Preamble

If the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs is configured, with the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB* amongst the associated SSBs, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

If the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs is configured, with the UE selected CSI-RS with CSI-RSRP above *rsrp-ThresholdCSI-RS* amongst the associated CSI-RSs, UE shall have the capability to select the Random Access Preamble corresponding to the selected CSI-RS, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions in *ra-OccasionList* corresponding to the selected CSI-RS, and PRACH occasion shall be randomly selected with equal probability amongst the selected CSI-RS associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

If the random access procedure is initialized for beam failure recovery and if the contention-free Random Access Resources and the contention-free PRACH occasions for beam failure recovery request associated with any of the SSBs and/or CSI-RSs is configured, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB with SS-RSRP above *rsrp-ThresholdSSB* amongst the associated SSBs or the selected CSI-RS with CSI-RSRP above *rsrp-ThresholdCSI-RS* amongst the associated CSI-RSs, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, or from the PRACH occasions in *ra-OccasionList* corresponding to the selected CSI-RS, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions or the selected CSI-RS associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

6.2.2.2.2 Correct behaviour when receiving Random Access Response

The UE may stop monitoring for Random Access Response(s), if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble, unless the random access procedure is initialized for Other SI request from UE.

The UE may stop monitoring for Random Access Response(s) and shall monitor the Other SI transmission if the Random Access Response only contains a Random Access Preamble identifier which is corresponding to the transmitted Random Access Preamble and the random access procedure is initialized for SI request from UE, as specified in clause 5.1.4 in TS 38.321 [7].

The UE may stop monitoring for Random Access Response(s), if the contention-free Random Access Preamble for beam failure recovery request was transmitted and if the PDCCH addressed to UE's C-RNTI is received, as specified in clause 5.1.4 in TS 38.321 [7].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7] for the next available PRACH occasion, and transmit the preamble with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

6.2.2.2.3 Correct behaviour when not receiving Random Access Response

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7] for the next available PRACH occasion, and transmit the preamble with the calculated PRACH transmission power, if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon* or if no PDCCH addressed to UE's C-RNTI is received within the RA Response window configured in *BeamFailureRecoveryConfig*, as defined in clause 5.1.4 in TS 38.321 [7].

6.2.2.2.3 UE behaviour when configured with supplementary UL

In addition to the requirements defined in clause 6.2.2.2.1 and 6.2.2.2.2, a UE configured with supplementary UL carrier shall use RACH configuration for the supplementary UL carrier contained in RMSI and RRC dedicated signalling. If the cell for the random access procedure is configured with supplementary UL, the UE shall transmit or re-transmit PRACH preamble on the supplementary UL carrier if the SS-RSRP measured by the UE on the DL carrier is lower than the *rsrp-ThresholdSSB-SUL* as defined in TS 38.331 [2].

6.2.3 SA: RRC Connection Release with Redirection

6.2.3.1 Introduction

This clause contains requirements on the UE regarding RRC connection release with redirection procedure. RRC connection release with redirection is initiated by the *RRCRelease* message with redirection to E-UTRAN or NR from NR specified in TS 38.331 [2]. The RRC connection release with redirection procedure is specified in clause 5.3.8 of TS 38.331 [2].

6.2.3.2 Requirements

6.2.3.2.1 RRC connection release with redirection to NR

The UE shall be capable of performing the RRC connection release with redirection to the target NR cell within $T_{\text{connection_release_redirect_NR}}$.

The time delay ($T_{\text{connection_release_redirect_NR}}$) is the time between the end of the last slot containing the RRC command, “*RRCRelease*” (TS 38.331 [2]) on the NR PDSCH and the time the UE starts to send random access to the target NR cell. The time delay ($T_{\text{connection_release_redirect_NR}}$) shall be less than:

$$T_{\text{connection_release_redirect_NR}} = T_{\text{RRC_procedure_delay}} + T_{\text{identify-NR}} + T_{\text{SI-NR}} + T_{\text{RACH}}$$

The target NR cell shall be considered detectable when for each relevant SSB, the side conditions should be met that,

- the conditions of SSB_{RP} and SSB \hat{E}_s/I_{ot} according to Annex B.2.5 for a corresponding NR Band are fulfilled.

$T_{\text{RRC_procedure_delay}}$: It is the RRC procedure delay for processing the received message “*RRCRelease*” as defined in clause 6.2.2 of TS 38.331 [2].

$T_{\text{identify-NR}}$: It is the time to identify the target NR cell and depends on the FR of the target NR cell. It is defined in Table 6.2.3.2.1-1. Note that $T_{\text{identify-NR}} = T_{\text{PSS/SSS-sync}} + T_{\text{meas}}$, in which $T_{\text{PSS/SSS-sync}}$ is the cell search time and T_{meas} is the measurement time due to cell selection criteria evaluation.

$T_{\text{SI-NR}}$: It is the time required for acquiring all the relevant system information of the target NR cell. This time depends upon whether the UE is provided with the relevant system information of the target NR cell or not by the old NR cell before the RRC connection is released.

T_{RACH} : It is the delay uncertainty in acquiring the first available PRACH occasion in the target NR cell. T_{RACH} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the redirection command, otherwise T_{rs} is the SMTC periodicity configured in the *measObjectNR* having the same SSB frequency and subcarrier spacing configured for the RRC connection release with redirection. If the UE is not provided with SMTC configuration or measurement object for the frequency which is also configured for the RRC connection release with redirection then:

- the requirement in this clause is applied with $T_{\text{rs}} = 20$ ms if the SSB transmission periodicity is not larger than 20 ms; otherwise,
- there is no requirement if the SSB transmission periodicity is larger than 20ms.

Table 6.2.3.2.1-1: Time to identify target NR cell for RRC connection release with redirection to NR

| FR of target NR cell | $T_{\text{identify-NR}}$ |
|----------------------|---|
| FR1 | MAX (680 ms, 11 x T_{rs}) |
| FR2 | MAX (880 ms, 8x11 x T_{rs}) |
| Note: | If the UE has been provided with higher layer signaling of <i>smtc2</i> specified in TS 38.331 [2] prior to the redirection command, T_{rs} follows <i>smtc1</i> or <i>smtc2</i> according to the physical cell ID of the target cell. |

6.2.3.2.2 RRC connection release with redirection to E-UTRAN

The UE shall be capable of performing the RRC connection release with redirection to the target E-UTRAN cell within $T_{\text{connection_release_redirect_E-UTRA}}$.

The time delay ($T_{\text{connection_release_redirect_E-UTRA}}$) is the time between the end of the last slot containing the RRC command, “*RRCRelease*” (TS 38.331 [2]) on the PDSCH and the time the UE starts to send random access to the target E-UTRA cell. The time delay ($T_{\text{connection_release_redirect_E-UTRA}}$) shall be less than:

$$T_{\text{connection_release_redirect_E-UTRA}} = T_{\text{RRC_procedure_delay}} + T_{\text{identify-E-UTRA}} + T_{\text{SI-E-UTRA}} + T_{\text{RACH}}$$

The target E-UTRA FDD or TDD cell shall be considered detectable provided the following conditions are fulfilled:

- the same conditions as for inter-frequency RSRP measurements specified in annex B.1.2 of TS 36.133 [15] are fulfilled for a corresponding Band, and
- the same conditions as for inter-frequency RSRQ measurements specified in annex B.1.2 of TS 36.133 [15] are fulfilled for a corresponding Band, and
- SCH conditions specified in annex B.1.2 of TS 36.133 [15] are fulfilled for a corresponding Band.

$T_{\text{RRC_procedure_delay}}$: It is the RRC procedure delay for processing the received message “*RRCRelease*” as defined in clause 6.2.2 of TS 38.331 [2].

$T_{\text{identify-E-UTRA}}$: It is the time to identify the target E-UTRA cell. It shall be less than 320 ms.

$T_{\text{SI-E-UTRA}}$: It is the time required for acquiring all the relevant system information of the target E-UTRA cell. This time depends upon whether the UE is provided with the relevant system information (SI) of the target E-UTRA cell or not by the old NR cell before the RRC connection is released.

T_{RACH} : It is the delay caused due to the random access procedure when sending random access to the target E-UTRA cell.

7 Timing

7.1 UE transmit timing

7.1.1 Introduction

The UE shall have capability to follow the frame timing change of the reference cell in connected state. The uplink frame transmission takes place $(N_{\text{TA}} + N_{\text{TA_offset}}) \times T_c$ before the reception of the first detected path (in time) of the corresponding downlink frame from the reference cell. For serving cell(s) in PTAG, UE shall use the SpCell as the reference cell for deriving the UE transmit timing for cells in the PTAG. For serving cell(s) in STAG, UE shall use any of the activated SCells as the reference cell for deriving the UE transmit timing for the cells in the STAG. UE initial transmit timing accuracy and gradual timing adjustment requirements are defined in the following requirements.

7.1.2 Requirements

The UE initial transmission timing error shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is specified in Table 7.1.2-1. This requirement applies:

- when it is the first transmission in a DRX cycle for PUCCH, PUSCH and SRS or it is the PRACH transmission.

The UE shall meet the T_e requirement for an initial transmission provided that at least one SSB is available at the UE during the last 160 ms. The reference point for the UE initial transmit timing control requirement shall be the downlink timing of the reference cell minus $(N_{\text{TA}} + N_{\text{TA_offset}}) \times T_c$. The downlink timing is defined as the time when the first detected path (in time) of the corresponding downlink frame is received from the reference cell. N_{TA} for PRACH is defined as 0.

$(N_{\text{TA}} + N_{\text{TA_offset}}) \times T_c$ (in T_c units) for other channels is the difference between UE transmission timing and the downlink timing immediately after when the last timing advance in clause 7.3 was applied. N_{TA} for other channels is not changed until next timing advance is received. The value of $N_{\text{TA_offset}}$ depends on the duplex mode of the cell in which the uplink transmission takes place and the frequency range (FR). $N_{\text{TA_offset}}$ is defined in Table 7.1.2-2.

Table 7.1.2-1: T_e Timing Error Limit

| Frequency Range | SCS of SSB signals (kHz) | SCS of uplink signals (kHz) | T_e |
|---|--------------------------|-----------------------------|--------------------------|
| 1 | 15 | 15 | $12 \cdot 64 \cdot T_c$ |
| | | 30 | $10 \cdot 64 \cdot T_c$ |
| | | 60 | $10 \cdot 64 \cdot T_c$ |
| | 30 | 15 | $8 \cdot 64 \cdot T_c$ |
| | | 30 | $8 \cdot 64 \cdot T_c$ |
| | | 60 | $7 \cdot 64 \cdot T_c$ |
| 2 | 120 | 60 | $3.5 \cdot 64 \cdot T_c$ |
| | | 120 | $3.5 \cdot 64 \cdot T_c$ |
| | 240 | 60 | $3 \cdot 64 \cdot T_c$ |
| | | 120 | $3 \cdot 64 \cdot T_c$ |
| Note 1: T_c is the basic timing unit defined in TS 38.211 [6] | | | |

Table 7.1.2-2: The Value of $N_{TA\ offset}$

| Frequency range and band of cell used for uplink transmission | $N_{TA\ offset}$ (Unit: T_c) |
|---|---------------------------------|
| FR1 FDD band without LTE-NR coexistence case or FR1 TDD band without LTE-NR coexistence case | 25600 (Note 1) |
| FR1 FDD band with LTE-NR coexistence case | 0 (Note 1) |
| FR1 TDD band with LTE-NR coexistence case | 39936 (Note 1) |
| FR2 | 13792 |
| Note 1: The UE identifies $N_{TA\ offset}$ based on the information n-TimingAdvanceOffset as specified in TS 38.331 [2]. If UE is not provided with the information n-TimingAdvanceOffset, the default value of $N_{TA\ offset}$ is set as 25600 for FR1 band. In case of multiple UL carriers in the same TAG, UE expects that the same value of n-TimingAdvanceOffset is provided for all the UL carriers according to clause 4.2 in TS 38.213 [3] and the value 39936 of $N_{TA\ offset}$ can also be provided for a FDD serving cell. | |
| Note 2: Void | |

When it is not the first transmission in a DRX cycle or there is no DRX cycle, and when it is the transmission for PUCCH, PUSCH and SRS transmission, the UE shall be capable of changing the transmission timing according to the received downlink frame of the reference cell except when the timing advance in clause 7.3 is applied.

Table 7.1.2-3: void

7.1.2.1 Gradual timing adjustment

When the transmission timing error between the UE and the reference timing exceeds $\pm T_e$ then the UE is required to adjust its timing to within $\pm T_e$. The reference timing shall be $(N_{TA} + N_{TA\ offset}) \times T_c$ before the downlink timing of the reference cell. All adjustments made to the UE uplink timing shall follow these rules:

- 1) The maximum amount of the magnitude of the timing change in one adjustment shall be T_q .
- 2) The minimum aggregate adjustment rate shall be T_p per second.
- 3) The maximum aggregate adjustment rate shall be T_q per 200 ms.

where the maximum autonomous time adjustment step T_q and the aggregate adjustment rate T_p are specified in Table 7.1.2.1-1.

Table 7.1.2.1-1: T_q Maximum Autonomous Time Adjustment Step and T_p Minimum Aggregate Adjustment rate

| Frequency Range | SCS of uplink signals (kHz) | T_q | T_p |
|---|-----------------------------|--------------------------|--------------------------|
| 1 | 15 | $5.5 \cdot 64 \cdot T_c$ | $5.5 \cdot 64 \cdot T_c$ |
| | 30 | $5.5 \cdot 64 \cdot T_c$ | $5.5 \cdot 64 \cdot T_c$ |
| | 60 | $5.5 \cdot 64 \cdot T_c$ | $5.5 \cdot 64 \cdot T_c$ |
| 2 | 60 | $2.5 \cdot 64 \cdot T_c$ | $2.5 \cdot 64 \cdot T_c$ |
| | 120 | $2.5 \cdot 64 \cdot T_c$ | $2.5 \cdot 64 \cdot T_c$ |
| NOTE: T_c is the basic timing unit defined in TS 38.211 [6] | | | |

7.1.2.2 Void

Table 7.1.2.2-1: Void

7.2 UE timer accuracy

7.2.1 Introduction

UE timers are used in different protocol entities to control the UE behaviour.

7.2.2 Requirements

For UE timers specified in TS 38.331 [2], the UE shall comply with the timer accuracies according to Table 7.2.2-1.

The requirements are only related to the actual timing measurements internally in the UE. They do not include the following:

- Inaccuracy in the start and stop conditions of a timer (e.g. UE reaction time to detect that start and stop conditions of a timer is fulfilled), or
- Inaccuracies due to restrictions in observability of start and stop conditions of a UE timer (e.g. slot alignment when UE sends messages at timer expiry).

Table 7.2.2-1

| Timer value [s] | Accuracy |
|----------------------|-------------|
| timer value < 4 | $\pm 0.1s$ |
| timer value ≥ 4 | $\pm 2.5\%$ |

7.3 Timing advance

7.3.1 Introduction

The timing advance is initiated from gNB to UE in EN-DC, NR-DC, NE-DC and NR SA operation modes, with MAC message that implies the adjustment of the timing advance, as defined in clause 5.2 of TS 38.321 [7].

7.3.2 Requirements

7.3.2.1 Timing Advance adjustment delay

UE shall adjust the timing of its uplink transmission timing at time slot $n+k+1$ for a timing advance command received in time slot n , and the value of k is defined in clause 4.2 in TS 38.213 [3]. The same requirement applies also when the UE is not able to transmit a configured uplink transmission due to the channel assessment procedure.

7.3.2.2 Timing Advance adjustment accuracy

The UE shall adjust the timing of its transmissions with a relative accuracy better than or equal to the UE Timing Advance adjustment accuracy requirement in Table 7.3.2.2-1, to the signalled timing advance value compared to the timing of preceding uplink transmission. The timing advance command step is defined in TS 38.213 [3].

Table 7.3.2.2-1: UE Timing Advance adjustment accuracy

| UL Sub Carrier Spacing(kHz) | 15 | 30 | 60 | 120 |
|---------------------------------------|---------------|---------------|---------------|--------------|
| UE Timing Advance adjustment accuracy | $\pm 256 T_c$ | $\pm 256 T_c$ | $\pm 128 T_c$ | $\pm 32 T_c$ |

7.4 Cell phase synchronization accuracy

7.4.1 Definition

Cell phase synchronization accuracy for TDD is defined as the maximum absolute deviation in frame start timing between any pair of cells on the same frequency that have overlapping coverage areas.

7.4.2 Minimum requirements

The cell phase synchronization accuracy measured at BS antenna connectors shall be better than 3 μ s.

7.5 Maximum Transmission Timing Difference

7.5.1 Introduction

A UE shall be capable of handling a relative transmission timing difference between subframe timing boundary of E-UTRA PCell and the closest slot timing boundary of PSCell to be aggregated for EN-DC operation.

A UE shall be capable of handling a relative transmission timing difference among the closest slot timing boundaries of different carriers to be aggregated in NR carrier aggregation.

A UE shall be capable of handling a relative transmission timing difference between slot timing boundary of PCell and subframe timing boundary of E-UTRA PSCell to be aggregated for NE-DC operation.

A UE shall be capable of handling a relative transmission timing difference between slot timing boundaries of PCell and the closest slot timing boundary of PSCell to be aggregated in NR DC operation.

7.5.2 Minimum Requirements for inter-band EN-DC

The UE shall be capable of handling a maximum uplink transmission timing difference between E-UTRA PCell and PSCell as shown in Table 7.5.2-1.

Table 7.5.2-1 Maximum uplink transmission timing difference requirement for asynchronous EN-DC

| Sub-carrier spacing in E-UTRA PCell (kHz) | UL Sub-carrier spacing for data in PSCell (kHz) | Maximum uplink transmission timing difference (μ s) |
|---|---|--|
| 15 | 15 | 500 |
| 15 | 30 | 250 |
| 15 | 60 | 125 |
| 15 | 120 ^{Note1} | 62.5 |
| NOTE 1: For E-UTRA FDD-NR FDD intra-band EN-DC, for which the requirement is defined in clause 7.5.3 and this Table 7.5.2-1 is also applicable, the scenario with 120kHz PSCell does not exist. | | |

Table 7.5.2-2 Void

7.5.2.1 Minimum Requirements for inter-band synchronous EN-DC

The requirements in this clause apply as a reference for inter-band synchronous EN-DC.

The UE shall be capable of handling a maximum uplink transmission timing difference between E-UTRA PCell and PSCell for inter-band synchronous EN-DC as shown in Table 7.5.2.1-1. The requirements for synchronous EN-DC are applicable for E-UTRA TDD-NR TDD, E-UTRA FDD-NR FDD, E-UTRA TDD-NR FDD and E-UTRA FDD-NR TDD inter-band EN-DC.

Table 7.5.2.1-1 Maximum uplink transmission timing difference requirement for inter-band synchronous EN-DC

| Sub-carrier spacing in E-UTRA PCell (kHz) | UL Sub-carrier spacing for data in PSCell (kHz) | Maximum uplink transmission timing difference (μ s) |
|---|---|--|
| 15 | 15 | 35.21 |
| 15 | 30 | 35.21 |
| 15 | 60 | 35.21 |
| 15 | 120 | 35.21 |

7.5.3 Minimum Requirements for intra-band EN-DC

For intra-band EN-DC, only co-located deployment is applied.

The UE shall be capable of handling a maximum uplink transmission timing difference between E-UTRA PCell and PSCell as shown in Table 7.5.2-1 for E-UTRA FDD-NR FDD intra-band EN-DC provided the UE indicates that it is capable of asynchronous EN-DC operation [2].

The UE shall be capable of handling a maximum uplink transmission timing difference between E-UTRA PCell and PSCell as shown in Table 7.5.3-1 for E-UTRA TDD-NR TDD and E-UTRA FDD-NR FDD intra-band EN-DC provided the UE does not indicate that it is capable of asynchronous FDD-FDD EN-DC operation [16].

Table 7.5.3-1: Maximum uplink transmission timing difference requirement for intra-band synchronous EN-DC

| Sub-carrier spacing in E-UTRA PCell (kHz) | UL Sub-carrier spacing for data in PSCell (kHz) | Maximum uplink transmission timing difference (μ s) |
|---|---|--|
| 15 | 15 | 5.21 ^{Note 1, Note 2} |
| 15 | 30 | 5.21 ^{Note 2} |
| 15 | 60 | 5.21 ^{Note 2} |
| NOTE 1: This is not applicable for a UE which indicates the capability of only supporting single UL timing (<i>ul-TimingAlignmentEUTRA-NR</i> is signalled). Single UL timing for E-UTRA and NR cell is assumed for this UE. NOTE 2: If the transmission timing difference exceeds the cyclic prefix length of the UL Sub-carrier spacing for data in PSCell, NR UE Tx EVM degradation is expected for the symbol that is overlapping the LTE subframe boundary | | |

7.5.4 Minimum Requirements for NR Carrier Aggregation

The UE shall be capable of handling at least a relative transmission timing difference between slot timing of all pairs of TAGs as shown in Table 7.5.4-1, provided that the UE is:

- configured with the pTAG and the sTAG for inter-band NR carrier aggregation in SA or NR-DC mode, or
- configured with more than one sTAG for inter-band NR carrier aggregation in EN-DC or NE-DC mode.

Table 7.5.4-1: Maximum uplink transmission timing difference requirement for inter-band NR carrier aggregation

| Frequency Range of the pair of TAGs | Maximum uplink transmission timing difference (μ s) |
|-------------------------------------|--|
| FR1 | 34.6 |
| FR2 | 8.5 |
| Between FR1 and FR2 | 26.1 |

7.5.5 Minimum Requirements for inter-band NE-DC

The UE shall be capable of handling a maximum uplink transmission timing difference between PCell and E-UTRA PSCell as shown in Table 7.5.5-1 for inter-band asynchronous NE-DC.

Table 7.5.5-1: Maximum uplink transmission timing difference requirement for inter-band asynchronous NE-DC

| Sub-carrier spacing in PCell (kHz) | UL Sub-carrier spacing for data in E-UTRA PSCell (kHz) | Maximum uplink transmission timing difference (μ s) |
|------------------------------------|--|--|
| 15 | 15 | 500 |
| 30 | 15 | 250 |
| 60 | 15 | 125 |
| 120 | 15 | 62.5 |
| NOTE 1: Void | | |

Table 7.5.5-2: Void

7.5.5.1 Minimum Requirements for inter-band synchronous NE-DC

The requirements in this clause apply as a reference for inter-band synchronous NE-DC.

The UE shall be capable of handling a maximum uplink transmission timing difference between PCell and E-UTRA PSCell for inter-band synchronous NE-DC as shown in Table 7.5.5.1-1. The requirements for synchronous NE-DC are applicable for NR TDD- E-UTRA TDD, NR FDD- E-UTRA FDD, NR TDD- E-UTRA FDD and NR FDD- E-UTRA TDD inter-band NE-DC.

Table 7.5.5.1-1: Maximum uplink transmission timing difference requirement for inter-band synchronous NE-DC

| Sub-carrier spacing in PCell (kHz) | UL Sub-carrier spacing for data in E-UTRA PSCell (kHz) | Maximum uplink transmission timing difference (μ s) |
|------------------------------------|--|--|
| 15 | 15 | 35.21 |
| 30 | 15 | 35.21 |
| 60 | 15 | 35.21 |
| 120 | 15 | 35.21 |

7.5.6 Minimum Requirements for inter-band NR DC

The UE shall be capable of handling a maximum uplink transmission timing difference between PCell and PSCell as shown in Table 7.5.6-1 provided that the UE indicates that it is capable of synchronous NR DC [16].

Table 7.5.6-1: Maximum uplink transmission timing difference requirement for inter-band synchronous NR DC

| Frequency Range | | Maximum uplink transmission timing difference (μs) |
|-----------------|--------|---|
| PCell | PSCell | |
| FR1 | FR2 | 34.1 |

7.6 Maximum Receive Timing Difference

7.6.1 Introduction

A UE shall be capable of handling a relative receive timing difference between subframe timing boundary of an E-UTRA cell belonging to the MCG and the closest slot timing boundary of a cell belonging to SCG to be aggregated for EN-DC operation.

A UE shall be capable of handling a relative receive timing difference between subframe timing boundary of an E-UTRA cell belonging to the SCG to be aggregated for NE-DC operation and the closest slot timing boundary of a cell belonging to MCG.

A UE shall be capable of handling a relative receive timing difference between slot timing boundary of a cell belonging to MCG and the closest slot timing boundary of a cell belonging to the SCG to be aggregated for NR DC operation. A UE shall be capable of handling a relative receive timing difference among the closest slot timing boundaries of different carriers to be aggregated in NR carrier aggregation.

7.6.2 Minimum Requirements for inter-band EN-DC

The UE shall be capable of handling at least a relative receive timing difference between subframe timing of signal from a E-UTRA cell belonging to the MCG and slot timing of signal from a cell belonging to SCG at the UE receiver as shown in Table 7.6.2-1.

Table 7.6.2-1: Maximum receive timing difference requirement for asynchronous EN-DC

| Sub-carrier spacing of E-UTRA cell in MCG (kHz) | DL Sub-carrier spacing of cell in SCG (kHz) (Note 1) | Maximum receive timing difference (μs) |
|---|--|---|
| 15 | 15 | 500 |
| 15 | 30 | 250 |
| 15 | 60 | 125 |
| 15 | 120 ^{Note2} | 62.5 |
| NOTE 1: DL Sub-carrier spacing is $\min\{\text{SCS}_{\text{SS}}, \text{SCS}_{\text{DATA}}\}$. | | |
| NOTE 2: For E-UTRA FDD-NR FDD intra-band EN-DC, for which the requirement is defined in clause 7.6.3 and this Table 7.6.2-1 is also applicable, the scenario with 120 kHz does not exist. | | |

Table 7.6.2-2: Void**Table 7.6.2-3 Void**

7.6.2.1 Minimum Requirements for inter-band synchronous EN-DC

The requirements in this clause apply as a reference for inter-band synchronous EN-DC.

The UE shall be capable of handling at least a relative receive timing difference between subframe timing of signal from an E-UTRA cell belonging to the MCG and slot timing of signal from a cell belonging to SCG at the UE receiver for inter-band synchronous EN-DC as shown in Table 7.6.2.1-1. The requirements for synchronous EN-DC are applicable for E-UTRA TDD-NR TDD, E-UTRA FDD-NR FDD, E-UTRA TDD-NR FDD and E-UTRA FDD-NR TDD inter-band EN-DC.

Table 7.6.2.1-1: Maximum receive timing difference requirement for inter-band synchronous EN-DC

| Sub-carrier spacing of E-UTRA cell in MCG (kHz) | DL Sub-carrier spacing of cell in SCG (kHz) (Note1) | Maximum receive timing difference (μ s) |
|--|---|--|
| 15 | 15 | 33 |
| 15 | 30 | |
| 15 | 60 | |
| 15 | 120 | |
| Note 1: DL Sub-carrier spacing is $\min\{SCS_{SS}, SCS_{DATA}\}$. | | |

7.6.3 Minimum Requirements for intra-band EN-DC

For intra-band EN-DC, only co-located deployment is applied.

The UE shall be capable of handling at least a relative receive timing difference between subframe timing of signal from a E-UTRA cell belonging to the MCG and slot timing of signal from a cell belonging to the SCG as shown in Table 7.6.2-1 for E-UTRA FDD-NR FDD intra-band EN-DC provided the UE indicates that it is capable of asynchronous EN-DC operation [2].

The UE shall be capable of handling at least a relative receive timing difference between subframe timing of signal from a E-UTRA cell belonging to the MCG and slot timing of signal from a cell belonging to the SCG as shown in Table 7.6.3-1 for E-UTRA FDD-NR FDD and E-UTRA TDD-NR TDD intra-band EN-DC provided the UE does not indicate that it is capable of asynchronous FDD-FDD EN-DC operation [16].

Table 7.6.3-1 Maximum receive timing difference requirement for intra-band synchronous EN-DC

| Sub-carrier spacing of E-UTRA cell in MCG (kHz) | DL Sub-carrier spacing of cell in SCG (kHz) ^{Note1} | Maximum receive timing difference (μ s) |
|--|--|--|
| 15 | 15 | 3 |
| 15 | 30 | 3 |
| 15 | 60 | 3 |
| NOTE 1: DL Sub-carrier spacing is $\min\{SCS_{SS}, SCS_{DATA}\}$. | | |

Table 7.6.3-2 Void

7.6.4 Minimum Requirements for NR Carrier Aggregation

For intra-band CA, only co-located deployment is applied. For intra-band non-contiguous NR carrier aggregation, the UE shall be capable of handling at least a relative receive timing difference between slot timing of different carriers to be aggregated at the UE receiver as shown in Table 7.6.4-1 below.

Table 7.6.4-1: Maximum receive timing difference requirement for intra-band non-contiguous NR carrier aggregation

| Frequency Range | Maximum receive timing difference (μ s) |
|--|--|
| FR1 | 3 ¹ |
| FR2 | 0.26 |
| Note 1: In the case of different SCS on different CCs, if the receive time difference exceeds the cyclic prefix length of that SCS, demodulation performance degradation is expected for the first symbol of the slot. | |

For inter-band NR carrier aggregation, the UE shall be capable of handling at least a relative receive timing difference between slot timing of all pairs of carriers to be aggregated at the UE receiver as shown in Table 7.6.4-2 below.

Table 7.6.4-2: Maximum receive timing difference requirement for inter-band NR carrier aggregation

| Frequency Range of the pair of carriers | Maximum receive timing difference (μs) |
|---|---|
| FR1 | 33 |
| FR2 | 8 |
| Between FR1 and FR2 | 25 |

7.6.5 Minimum Requirements for inter-band NE-DC

The UE shall be capable of handling at least a relative receive timing difference between slot timing of signal from a cell belonging to the MCG and subframe timing of signal from an E-UTRA cell belonging to the SCG at the UE receiver for asynchronous NE-DC as shown in Table 7.6.5-1.

Table 7.6.5-1: Maximum receive timing difference requirement for asynchronous NE-DC

| Sub-carrier spacing of cell in MCG (kHz) | DL Sub-carrier spacing of EUTRA cell in SCG (kHz) (Note 1) | Maximum receive timing difference (μs) |
|--|--|---|
| 15 | 15 | 500 |
| 30 | 15 | 250 |
| 60 | 15 | 125 |
| 120 | 15 | 62.5 |
| NOTE 1: DL Sub-carrier spacing is $\min\{\text{SCS}_{\text{SS}}, \text{SCS}_{\text{DATA}}\}$. | | |
| NOTE 2: Void | | |

Table 7.6.5-2: Void

7.6.5.1 Minimum Requirements for inter-band synchronous NE-DC

The requirements in this clause apply as a reference for inter-band synchronous NE-DC.

The UE shall be capable of handling at least a relative receive timing difference between slot timing of signal from a cell belonging to the MCG and subframe timing of signal from a E-UTRA cell belonging to the SCG at the UE receiver for inter-band synchronous NE-DC as shown in Table 7.6.5.1-1. The requirements for synchronous NE-DC are applicable for NR TDD- E-UTRA TDD, NR FDD- E-UTRA FDD, NR TDD- E-UTRA FDD and NR FDD- E-UTRA TDD inter-band NE-DC.

Table 7.6.5.1-1: Maximum receive timing difference requirement for inter-band synchronous NE-DC

| Sub-carrier spacing of cell in MCG (kHz) | DL Sub-carrier spacing of EUTRA cell in SCG (kHz) (Note1) | Maximum receive timing difference (μs) |
|--|---|---|
| 15 | 15 | 33 |
| 30 | 15 | |
| 60 | 15 | |
| 120 | 15 | |

7.6.6 Minimum Requirements for inter-band NR DC

The UE shall be capable of handling at least a relative receive timing difference between slot timing of signal from a cell belonging to the MCG and slot timing of signal from a cell belonging to the SCG at the UE receiver as shown in Table 7.6.6-1 provided that the UE indicates that it is capable of synchronous NR DC [16].

Table 7.6.6-1: Maximum receive timing difference requirement for inter-band synchronous NR DC

| Frequency Range | | Maximum receive timing difference (μs) |
|-----------------|-------------|---|
| Cell in MCG | Cell in SCG | |
| FR1 | FR2 | 33 |

7.7 *deriveSSB-IndexFromCell* tolerance

7.7.1 Minimum requirements

When *deriveSSB-IndexFromCell* is enabled, the UE assumes frame boundary alignment (including half frame, subframe and slot boundary alignment) across cells on the same frequency carrier is within a tolerance not worse than min(2 SSB symbols, 1 PDSCH symbol) and the SFNs of all cells on the same frequency carrier are the same.

7.8 Void

8 Signalling characteristics

8.1 Radio Link Monitoring

8.1.1 Introduction

The requirements in clause 8.1 apply for radio link monitoring on:

- PCell in SA NR, NR-DC and NE-DC operation mode,
- PSCell in NR-DC and EN-DC operation mode.

The UE shall monitor the downlink radio link quality based on the reference signal configured as RLM-RS resource(s) in order to detect the downlink radio link quality of the PCell and PSCell as specified in TS 38.213 [3]. The configured RLM-RS resources can be all SSBs, or all CSI-RSs, or a mix of SSBs and CSI-RSs. UE is not required to perform RLM outside the active DL BWP.

On each RLM-RS resource, the UE shall estimate the downlink radio link quality and compare it to the thresholds Q_{out} and Q_{in} for the purpose of monitoring downlink radio link quality of the cell.

The threshold Q_{out} is defined as the level at which the downlink radio link cannot be reliably received and shall correspond to the out-of-sync block error rate (BLER_{out}) as defined in Table 8.1.1-1. For SSB based radio link monitoring, $Q_{\text{out_SSB}}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1.2.1-1. For CSI-RS based radio link monitoring, $Q_{\text{out_CSI-RS}}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1.3.1-1.

The threshold Q_{in} is defined as the level at which the downlink radio link quality can be received with significantly higher reliability than at Q_{out} and shall correspond to the in-sync block error rate (BLER_{in}) as defined in Table 8.1.1-1. For SSB based radio link monitoring, $Q_{\text{in_SSB}}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1.2.1-2. For CSI-RS based radio link monitoring, $Q_{\text{in_CSI-RS}}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1.3.1-2.

The out-of-sync block error rate (BLER_{out}) and in-sync block error rate (BLER_{in}) are determined from the network configuration via parameter *rlmInSyncOutOfSyncThreshold* signalled by higher layers. When UE is not configured with *rlmInSyncOutOfSyncThreshold* from the network, UE determines out-of-sync and in-sync block error rates from Configuration #0 in Table 8.1.1-1 by default. All requirements in clause 8.1 are applicable for BLER Configuration #0 in Table 8.1.1-1.

Table 8.1.1-1: Out-of-sync and in-sync block error rates

| Configuration | BLER _{out} | BLER _{in} |
|---------------|---------------------|--------------------|
| 0 | 10% | 2% |

UE shall be able to monitor up to N_{RLM} RLM-RS resources of the same or different types in each corresponding carrier frequency range, depending on a maximum number L_{max} of SSBs per half frame according to TS 38.213 [3], where N_{RLM} is specified in Table 8.1.1-2, and meet the requirements as specified in clause 8.1. UE is not required to meet the requirements in clause 8.1 if RLM-RS is not configured and no TCI state for PDCCH is activated.

Table 8.1.1-2: Maximum number of RLM-RS resources N_{RLM}

| Carrier frequency range of PCell/PSCell | L_{max} | Maximum number of RLM-RS resources, N_{RLM} |
|--|------------------|--|
| FR1, ≤ 3 GHz ^{Note} | 4 | 2 |
| FR1, > 3 GHz ^{Note} | 8 | 4 |
| FR2 | 64 | 8 |
| NOTE: For unpaired spectrum operation with Case C - 30 kHz SCS, 3GHz is replaced by 2.4GHz, as specified in clause 4.1 in TS 38.213 [3]. | | |

8.1.2 Requirements for SSB based radio link monitoring

8.1.2.1 Introduction

The requirements in this clause apply for each SSB based RLM-RS resource configured for PCell or PSCell, provided that the SSB configured for RLM is actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.1.2.2.

Table 8.1.2.1-1: PDCCH transmission parameters for out-of-sync evaluation

| Attribute | Value for BLER Configuration #0 |
|--|---------------------------------|
| DCI format | 1-0 |
| Number of control OFDM symbols | 2 |
| Aggregation level (CCE) | 8 |
| Ratio of hypothetical PDCCH RE energy to average SSS RE energy | 4dB |
| Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | 4dB |
| Bandwidth (PRBs) | 24 |
| Sub-carrier spacing (kHz) | SCS of the active DL BWP |
| DMRS precoder granularity | REG bundle size |
| REG bundle size | 6 |
| CP length | Normal |
| Mapping from REG to CCE | Distributed |

Table 8.1.2.1-2: PDCCH transmission parameters for in-sync evaluation

| Attribute | Value for BLER Configuration #0 |
|--|---------------------------------|
| DCI payload size | 1-0 |
| Number of control OFDM symbols | 2 |
| Aggregation level (CCE) | 4 |
| Ratio of hypothetical PDCCH RE energy to average SSS RE energy | 0dB |
| Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | 0dB |
| Bandwidth (PRBs) | 24 |
| Sub-carrier spacing (kHz) | SCS of the active DL BWP |
| DMRS precoder granularity | REG bundle size |
| REG bundle size | 6 |
| CP length | Normal |
| Mapping from REG to CCE | Distributed |

8.1.2.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{\text{Evaluate_out_SSB}}$ ms period becomes worse than the threshold $Q_{\text{out_SSB}}$ within $T_{\text{Evaluate_out_SSB}}$ [ms] evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{\text{Evaluate_in_SSB}}$ ms period becomes better than the threshold $Q_{\text{in_SSB}}$ within $T_{\text{Evaluate_in_SSB}}$ [ms] evaluation period.

$T_{\text{Evaluate_out_SSB}}$ and $T_{\text{Evaluate_in_SSB}}$ are defined in Table 8.1.2.2-1 for FR1.

$T_{\text{Evaluate_out_SSB}}$ and $T_{\text{Evaluate_in_SSB}}$ are defined in Table 8.1.2.2-2 for FR2 with scaling factor $N=8$.

For FR1,

- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, and these measurement gaps are overlapping with some but not all occasions of the SSB; and
- $P = 1$ when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

For FR2,

- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when RLM-RS resource is not overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$).
- P is P_{sharing} factor, when the RLM-RS resource is not overlapped with measurement gap and RLM-RS resource is fully overlapped with SMTC period ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$).
- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}} - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and
 - $T_{\text{SMTCperiod}} \neq \text{MGRP}$ or
 - $T_{\text{SMTCperiod}} = \text{MGRP}$ and $T_{\text{SSB}} < 0.5 \times T_{\text{SMTCperiod}}$

- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and $T_{\text{SMTCperiod}} = \text{MGRP}$ and $T_{\text{SSB}} = 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{\text{Min}(\text{MGRP}, T_{\text{SMTCperiod}})}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is partially or fully overlapped with measurement gap
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is fully overlapped with SMTC occasion ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$) and SMTC occasion is partially overlapped with measurement gap ($T_{\text{SMTCperiod}} < \text{MGRP}$)
- $P_{\text{sharing factor}} = 1$, if the RLM-RS resource outside measurement gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, and,
 - not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.
- $P_{\text{sharing factor}} = 3$, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{\text{SMTCperiod}}$ follows *smtc2*; Otherwise $T_{\text{SMTCperiod}}$ follows *smtc1*. $T_{\text{SMTCperiod}}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

Table 8.1.2.2-1: Evaluation period $T_{\text{Evaluate_out_SSB}}$ and $T_{\text{Evaluate_in_SSB}}$ for FR1

| Configuration | $T_{\text{Evaluate_out_SSB}}$ (ms) | $T_{\text{Evaluate_in_SSB}}$ (ms) |
|-------------------------|--|--|
| no DRX | $\text{Max}(200, \text{Ceil}(10 \times P) \times T_{\text{SSB}})$ | $\text{Max}(100, \text{Ceil}(5 \times P) \times T_{\text{SSB}})$ |
| DRX cycle ≤ 320 ms | $\text{Max}(200, \text{Ceil}(15 \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$ | $\text{Max}(100, \text{Ceil}(7.5 \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$ |
| DRX cycle > 320 ms | $\text{Ceil}(10 \times P) \times T_{\text{DRX}}$ | $\text{Ceil}(5 \times P) \times T_{\text{DRX}}$ |
| NOTE: | T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length. | |

Table 8.1.2.2-2: Evaluation period $T_{\text{Evaluate_out_SSB}}$ and $T_{\text{Evaluate_in_SSB}}$ for FR2

| Configuration | $T_{\text{Evaluate_out_SSB}}$ (ms) | $T_{\text{Evaluate_in_SSB}}$ (ms) |
|-------------------------|--|---|
| no DRX | $\text{Max}(200, \text{Ceil}(10 \times P \times N) \times T_{\text{SSB}})$ | $\text{Max}(100, \text{Ceil}(5 \times P \times N) \times T_{\text{SSB}})$ |
| DRX cycle ≤ 320 ms | $\text{Max}(200, \text{Ceil}(15 \times P \times N) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$ | $\text{Max}(100, \text{Ceil}(7.5 \times P \times N) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$ |
| DRX cycle > 320 ms | $\text{Ceil}(10 \times P \times N) \times T_{\text{DRX}}$ | $\text{Ceil}(5 \times P \times N) \times T_{\text{DRX}}$ |
| NOTE: | T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length. | |

8.1.2.3 Measurement restrictions for SSB based RLM

The UE is required to be capable of measuring SSB for RLM without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following clauses.

For FR1, when the SSB for RLM is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for RLM without any restriction;
- If SSB and CSI-RS have different SCS,
 - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for RLM without any restriction;
 - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for RLM and CSI-RS. Longer measurement period for SSB based RLM is expected, and no requirements are defined.

For FR2, when the SSB for RLM measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for RLM and CSI-RS. Longer measurement period for SSB based RLM is expected, and no requirements are defined.

8.1.3 Requirements for CSI-RS based radio link monitoring

8.1.3.1 Introduction

The requirements in this clause apply for each CSI-RS based RLM-RS resource configured for PCell or PSCell, provided that the CSI-RS configured for RLM is actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.1.3.2. UE is not expected to perform radio link monitoring measurements on the CSI-RS configured as RLM-RS if the CSI-RS is not in the active TCI state of any CORESET configured in the UE active BWP.

Table 8.1.3.1-1: PDCCH transmission parameters for out-of-sync evaluation

| Attribute | Value for BLER Configuration #0 |
|---|---------------------------------|
| DCI format | 1-0 |
| Number of control OFDM symbols | 2 |
| Aggregation level (CCE) | 8 |
| Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | 4dB |
| Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | 4dB |
| Bandwidth (PRBs) | 48 |
| Sub-carrier spacing (kHz) | SCS of the active DL BWP |
| DMRS precoder granularity | REG bundle size |
| REG bundle size | 6 |
| CP length | Normal |
| Mapping from REG to CCE | Distributed |

Table 8.1.3.1-2: PDCCH transmission parameters for in-sync evaluation

| Attribute | Value for BLER Configuration #0 |
|---|---------------------------------|
| DCI payload size | 1-0 |
| Number of control OFDM symbols | 2 |
| Aggregation level (CCE) | 4 |
| Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | 0dB |
| Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | 0dB |
| Bandwidth (PRBs) | 48 |
| Sub-carrier spacing (kHz) | SCS of the active DL BWP |
| DMRS precoder granularity | REG bundle size |
| REG bundle size | 6 |
| CP length | Normal |
| Mapping from REG to CCE | Distributed |

8.1.3.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{\text{Evaluate_out_CSI-RS}}$ ms period becomes worse than the threshold $Q_{\text{out_CSI-RS}}$ within $T_{\text{Evaluate_out_CSI-RS}}$ [ms] evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{\text{Evaluate_in_CSI-RS}}$ ms period becomes better than the threshold $Q_{\text{in_CSI-RS}}$ within $T_{\text{Evaluate_in_CSI-RS}}$ [ms] evaluation period.

- $T_{\text{Evaluate_out_CSI-RS}}$ and $T_{\text{Evaluate_in_CSI-RS}}$ are defined in Table 8.1.3.2-1 for FR1.
- $T_{\text{Evaluate_out_CSI-RS}}$ and $T_{\text{Evaluate_in_CSI-RS}}$ are defined in Table 8.1.3.2-2 for FR2 with scaling factor $N=1$.

The requirements of $T_{\text{Evaluate_out_CSI-RS}}$ and $T_{\text{Evaluate_in_CSI-RS}}$ apply provided that the CSI-RS for RLM is not in a resource set configured with repetition ON. The requirements do not apply when the CSI-RS resource in the active TCI state of CORESET is the same CSI-RS resource for RLM and the TCI state information of the CSI-RS resource is not given, wherein the TCI state information means QCL Type-D to SSB for L1-RSRP or CSI-RS with repetition ON.

For FR1,

- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{\text{MRGP}}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, and these measurement gaps are overlapping with some but not all occasions of the CSI-RS; and
- $P = 1$, when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

For FR2,

- $P = 1$, when the RLM-RS resource is not overlapped with measurement gap and also not overlapped with SMTC occasion.
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{\text{MRGP}}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is not overlapped with SMTC occasion ($T_{\text{CSI-RS}} < \text{MRGP}$)
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when the RLM-RS resource is not overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$).
- $P = P_{\text{sharing factor}}$, when the RLM-RS resource is not overlapped with measurement gap and RLM-RS resource is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$).

- $P = \frac{1}{1 - \frac{T_{CSI-RS}}{MGRP} - \frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and
 - $T_{SMTCperiod} \neq MGRP$ or
 - $T_{SMTCperiod} = MGRP$ and $T_{CSI-RS} < 0.5 \times T_{SMTCperiod}$
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{CSI-RS}}{MGRP}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod} = MGRP$ and $T_{CSI-RS} = 0.5 \times T_{SMTCperiod}$
- $P = \frac{1}{1 - \frac{T_{CSI-RS}}{\text{Min}(MGRP, T_{SMTCperiod})}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{CSI-RS}}{MGRP}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} < MGRP$)
- $P_{\text{sharing factor}} = 1$, if the RLM-RS resource outside measurement gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, and,
 - not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.
- $P_{\text{sharing factor}} = 3$, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Note: The overlap between CSI-RS for RLM and SMTC means that CSI-RS based RLM is within the SMTC window duration.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

The values of M_{out} and M_{in} used in Table 8.1.3.2-1 and Table 8.1.3.2-2 are defined as:

- $M_{out} = 20$ and $M_{in} = 10$, if the CSI-RS resource configured for RLM is transmitted with higher layer CSI-RS parameter *density* [6, clause 7.4.1] set to 3 and over the bandwidth ≥ 24 PRBs.

Table 8.1.3.2-1: Evaluation period $T_{\text{Evaluate_out_CSI-RS}}$ and $T_{\text{Evaluate_in_CSI-RS}}$ for FR1

| Configuration | $T_{\text{Evaluate_out_CSI-RS}}$ (ms) | $T_{\text{Evaluate_in_CSI-RS}}$ (ms) |
|--------------------------------|--|---|
| no DRX | $\text{Max}(200, \text{Ceil}(M_{out} \times P) \times T_{CSI-RS})$ | $\text{Max}(100, \text{Ceil}(M_{in} \times P) \times T_{CSI-RS})$ |
| $\text{DRX} \leq 320\text{ms}$ | $\text{Max}(200, \text{Ceil}(1.5 \times M_{out} \times P) \times \text{Max}(T_{DRX}, T_{CSI-RS}))$ | $\text{Max}(100, \text{Ceil}(1.5 \times M_{in} \times P) \times \text{Max}(T_{DRX}, T_{CSI-RS}))$ |
| $\text{DRX} > 320\text{ms}$ | $\text{Ceil}(M_{out} \times P) \times T_{DRX}$ | $\text{Ceil}(M_{in} \times P) \times T_{DRX}$ |
| NOTE: | T_{CSI-RS} is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for T_{CSI-RS} equal to 5 ms, 10ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length. | |

Table 8.1.3.2-2: Evaluation period $T_{\text{Evaluate_out_CSI-RS}}$ and $T_{\text{Evaluate_in_CSI-RS}}$ for FR2

| Configuration | $T_{\text{Evaluate_out_CSI-RS}}$ (ms) | $T_{\text{Evaluate_in_CSI-RS}}$ (ms) |
|--------------------------------|--|---|
| no DRX | $\text{Max}(200, \text{Ceil}(M_{\text{out}} \times P \times N) \times T_{\text{CSI-RS}})$ | $\text{Max}(100, \text{Ceil}(M_{\text{in}} \times P \times N) \times T_{\text{CSI-RS}})$ |
| $\text{DRX} \leq 320\text{ms}$ | $\text{Max}(200, \text{Ceil}(1.5 \times M_{\text{out}} \times P \times N) \times \text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}))$ | $\text{Max}(100, \text{Ceil}(1.5 \times M_{\text{in}} \times P \times N) \times \text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}))$ |
| $\text{DRX} > 320\text{ms}$ | $\text{Ceil}(M_{\text{out}} \times P \times N) \times T_{\text{DRX}}$ | $\text{Ceil}(M_{\text{in}} \times P \times N) \times T_{\text{DRX}}$ |
| NOTE: | $T_{\text{CSI-RS}}$ is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for $T_{\text{CSI-RS}}$ equal to 5 ms, 10 ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length. | |

8.1.3.3 Measurement restrictions for CSI-RS based RLM

The UE is required to be capable of measuring CSI-RS for RLM without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following clauses.

For both FR1 and FR2, when the CSI-RS for RLM is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for RLM in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD, or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for RLM, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for RLM, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS for RLM measurement without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for RLM and SSB. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.

For FR1, when the CSI-RS for RLM is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for RLM without any restriction.

For FR2, when the CSI-RS for RLM measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD, or L1-RSRP measurement on the same CC or different CCs in the same band, or in the same symbol as SSB for CBD measurement on the same CC or different CCs in the same band when beam failure is detected, UE is required to measure one of but not both CSI-RS for RLM and SSB. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.

For FR2, when the CSI-RS for RLM measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band,

- In the following cases, UE is required to measure one of but not both CSI-RS for RLM and the other CSI-RS. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.
 - The CSI-RS for RLM or the other CSI-RS in a resource set configured with repetition ON, or
 - The other CSI-RS is configured in q1 and beam failure is detected, or
 - The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,
- Otherwise, UE shall be able to measure the CSI-RS for RLM without any restriction.

8.1.4 Minimum requirement at transitions

When the UE transitions between DRX and no DRX or when DRX cycle periodicity changes, for each RLM-RS resource, for a duration of time equal to the evaluation period corresponding to the second mode after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation period corresponding to the first mode and the second mode. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second mode for each RLM-RS resource. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

When the UE transitions from a first configuration of RLM resources to a second configuration of RLM resources that is different from the first configuration, for each RLM resource present in the second configuration, for a duration of time equal to the evaluation period corresponding to the second configuration after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation periods corresponding to the first configuration and the second configuration. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second configuration for each RLM resource present in the second configuration. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

When the UE transitions from a first configuration of active TCI state of the CORESET to a second configuration of active TCI state of the CORESET, for each CSI-RS for RLM present in the second configuration, the UE shall use an evaluation period corresponding to the second configuration from the time of transition. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

8.1.5 Minimum requirement for UE turning off the transmitter

The transmitter power of the UE in the monitored cell shall be turned off within 40ms after expiry of T310 timer as specified in TS 38.331 [2].

8.1.6 Minimum requirement for L1 indication

When the downlink radio link quality on all the configured RLM-RS resources is worse than Q_{out} , layer 1 of the UE shall send an out-of-sync indication for the cell to the higher layers. A layer 3 filter shall be applied to the out-of-sync indications as specified in TS 38.331 [2].

When the downlink radio link quality on at least one of the configured RLM-RS resources is better than Q_{in} , layer 1 of the UE shall send an in-sync indication for the cell to the higher layers. A layer 3 filter shall be applied to the in-sync indications as specified in TS 38.331 [2].

The out-of-sync and in-sync evaluations for the configured RLM-RS resources shall be performed as specified in clause 5 in TS 38.213 [3]. Two successive indications from layer 1 shall be separated by at least $T_{Indication_interval}$.

When DRX is not used $T_{Indication_interval}$ is $\max(10\text{ms}, T_{RLM-RS,M})$, where $T_{RLM-RS,M}$ is the shortest periodicity of all configured RLM-RS resources for the monitored cell, which corresponds to T_{SSB} specified in clause 8.1.2 if the RLM-RS resource is SSB, or T_{CSI-RS} specified in clause 8.1.3 if the RLM-RS resource is CSI-RS.

In case DRX is used, $T_{Indication_interval}$ is $\text{Max}(10\text{ms}, 1.5 \times \text{DRX_cycle_length}, 1.5 \times T_{RLM-RS,M})$ if DRX cycle_length is less than or equal to 320ms, and $T_{Indication_interval}$ is DRX_cycle_length if DRX cycle_length is greater than 320ms. Upon start of T310 timer as specified in TS 38.331 [2], the UE shall monitor the configured RLM-RS resources for recovery using the evaluation period and layer 1 indication interval corresponding to the no DRX mode until the expiry or stop of T310 timer.

8.1.7 Scheduling availability of UE during radio link monitoring

When the reference signal to be measured for RLM has different subcarrier spacing than PDSCH/PDCCH or is on frequency range 2, there are restrictions on the scheduling availability as described in the following clauses.

8.1.7.1 Scheduling availability of UE performing radio link monitoring with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to radio link monitoring performed with a same subcarrier spacing as PDSCH/PDCCH on FR1.

8.1.7.2 Scheduling availability of UE performing radio link monitoring with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to radio link monitoring based on SSB as RLM-RS. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to radio link monitoring based on SSB as RLM-RS.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for radio link monitoring.

When intra-band carrier aggregation in FR1 is performed, the scheduling restrictions on FR1 serving PCell or PSCell applies to all serving cells in the same band on the symbols that fully or partially overlap with the restricted symbols. When inter-band carrier aggregation within FR1 is performed, there are no scheduling restrictions on FR1 serving cell(s) in the bands due to radio link monitoring performed on FR1 serving PCell or PSCell in different bands.

8.1.7.3 Scheduling availability of UE performing radio link monitoring on FR2

The following scheduling restriction applies due to radio link monitoring on an FR2 serving PCell and/or PSCell.

- If the RLM-RS is CSI-RS which is type-D QCLed with active TCI state for PDCCH or PDSCH, and the CSI-RS is not in a CSI-RS resource set with repetition ON,
 - There are no scheduling restrictions due to radio link monitoring based on the CSI-RS.
- Otherwise
 - The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on RLM-RS symbols to be measured for radio link monitoring.

When intra-band carrier aggregation in FR2 is performed, the scheduling restrictions on FR2 serving PCell or PSCell applies to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB for RLM and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for RLM; and

For the SSB for RLM and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for RLM.

8.1.7.4 Scheduling availability of UE performing radio link monitoring on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR-DC

There are no scheduling restrictions on FR1 serving cell(s) due to radio link monitoring performed on FR2 serving PCell and/or PSCell.

There are no scheduling restrictions on FR2 serving cell(s) due to radio link monitoring performed on FR1 serving PCell and/or PSCell.

NR-DC in Rel-15 only includes the scenarios where all serving cells in MCG are in FR1 and all serving cells in SCG are in FR2.

8.2 Interruption

8.2.1 EN-DC Interruption

8.2.1.1 Introduction

This clause contains the requirements related to the interruptions on PSCell, and SCell, when

E-UTRA PCell transitions between active and non-active during DRX, or

E-UTRA PCell transitions from non-DRX to DRX, or
 E-UTRA SCell in MCG or SCell in SCG is added or released, or
 E-UTRA SCell in MCG or SCell in SCG is activated or deactivated, or
 measurements on SCC with deactivated SCell in either E-UTRA MCG or NR SCG, or
 a supplementary UL carrier or an UL carrier is configured or de-configured, or
 UL/DL BWP is switched on PSCell or SCell in SCG.

The requirements shall apply for E-UTRA-NR DC with an E-UTRA PCell.

This clause contains interruptions where victim cell is PSCell or SCell belonging to SCG. Requirements for interruptions requirements when the victim cell is E-UTRA PCell or E-UTRA SCell belonging to MCG are specified in TS 36.133 [15].

For a UE which does not support per-FR measurement gaps, interruptions to the PSCell or activated SCG SCells may be caused by EUTRA PCell, EUTRA SCells or SCells on any frequency range. For UE which support per-FR gaps, interruptions to the PSCell or activated SCG SCells may be caused by EUTRA PCell, EUTRA SCells or SCells on the same frequency range as the victim cell.

8.2.1.2 Requirements

8.2.1.2.1 Interruptions at transitions between active and non-active during DRX

Interruption on PSCell and the activated SCell if configured due to E-UTRA PCell transitions between active and non-active during DRX when PSCell or SCell is in non-DRX are allowed with up to 1% probability of missed ACK/NACK when the configured E-UTRA PCell DRX cycle is less than 640 ms, and 0.625% probability of missed ACK/NACK is allowed when the configured E-UTRA PCell DRX cycle is 640 ms or longer. Each interruption shall not exceed X slot as defined in table 8.2.1.2.1-1.

Table 8.2.1.2.1-1: Interruption length X at transition between active and non-active during DRX

| μ | NR Slot length (ms) | Interruption length X (slots) | |
|-------|---------------------|-------------------------------|-------|
| | | Sync | Async |
| 0 | 1 | 1 | 2 |
| 1 | 0.5 | 1 | 2 |
| 2 | 0.25 | 3 | |
| 3 | 0.125 | 5 | |

When both E-UTRA PCell and PSCell are in DRX, no interruption is allowed.

8.2.1.2.2 Interruptions at transitions from non-DRX to DRX

Interruption on PSCell and the activated SCell if configured due to E-UTRA PCell transitions from non-DRX to DRX when PSCell or SCell is in non-DRX shall not exceed X slot as defined in table 8.2.1.2.1-1.

When PSCell and the activated SCell are in DRX, no interruption due to E-UTRA PCell transitions from non-DRX to DRX is allowed.

8.2.1.2.3 Interruptions at SCell addition/release

The requirements in this clause shall apply for the UE configured with PSCell.

When one E-UTRA SCell in MCG is added or released:

- the UE is allowed an interruption on any active serving cell in SCG;
- of up to X1 slot, if the active serving cell is not in the same band as any of the E-UTRA SCells being added or released, or

- of up to $\max\{Y1 \text{ slot} + T_{\text{SMTC_duration}}, 5\text{ms}\}$ if the active serving cells are in the same band as any of the E-UTRA SCells being added or released, provided the cell specific reference signals from the active serving cells and the E-UTRA SCells being added or released are available in the same slot, where $T_{\text{SMTC_duration}}$ is the longest SMTC duration among all above active serving cells in SCG;

Where X1 and Y1 are specified in Table 8.2.1.2.3-1.

When one SCell in SCG is added or released:

- the UE is allowed an interruption on any active serving cell in SCG:
- of up to X1 slot, if the active serving cell is not in the same band as any of the SCells being added or released, or
- of up to $Y1 \text{ slot} + T_{\text{SMTC_duration}}$ if the active serving cells are in the same band as any of the SCells being added or released, provided the cell specific reference signals from the active serving cells and the SCells being added or released are available in the same slot, where, $T_{\text{SMTC_duration}}$ is
 - the longest SMTC duration among all above active serving cells in SCG and the SCell being added when one SCell is added;
 - the longest SMTC duration among all above active serving cells in SCG when one SCell is released.

Where X1 and Y1 are specified in Table 8.2.1.2.3-2.

Table 8.2.1.2.3-1: Interruption length X1 and Y1 at E-UTRA SCell addition/Release

| μ | NR Slot length (ms) | Interruption length X1 (slots) | | Interruption length Y1 (slots) | |
|-------|---------------------|--------------------------------|-------|--------------------------------|-------|
| | | Sync | Async | Sync | Async |
| 0 | 1 | 1 | 2 | 1 | 2 |
| 1 | 0.5 | 2 | 3 | 2 | 3 |
| 2 | 0.25 | 5 | | 4 | 5 |
| 3 | 0.125 | 9 | | N/A | N/A |

Table 8.2.1.2.3-2: Interruption length X1 and Y1 at SCell addition/Release

| μ | NR Slot length (ms) of victim cell | Interruption length X1 (slots) | | Interruption length Y1 (slots) |
|-------|------------------------------------|--|---|--------------------------------|
| 0 | 1 | 1 | | 1 |
| 1 | 0.5 | 2 | | 2 |
| 2 | 0.25 | Both aggressor cell and victim cell are on FR2 | 4 | 4 |
| | | Either aggressor cell or victim cell is on FR1 | 5 | |
| 3 | 0.125 | Aggressor cell is on FR2 | 8 | 8 |
| | | Aggressor cell is on FR1 | 9 | |

8.2.1.2.4 Interruptions at SCell activation/deactivation

The requirements in this clause shall apply for the UE configured with PSCell and one SCell.

When one E-UTRA SCell in MCG is activated or deactivated:

- the UE is allowed an interruption on any active serving cell in SCG:
- of up to X2 slot, if the active serving cell is not in the same band as any of the E-UTRA SCells being activated or deactivated, or
- of up to $\max\{Y2 \text{ slot} + T_{\text{SMTC_duration}}, 5\text{ms}\}$ if the active serving cells are in the same band as any of the E-UTRA SCells being activated or deactivated, provided the cell specific reference signals from the active

-serving cells and the E-UTRA SCells being activated or deactivated are available in the same slot, where $T_{\text{SMTC_duration}}$ is the longest SMTC duration among all above active serving cells in SCG.

Where X2 and Y2 are specified in Table 8.2.1.2.4-1.

When one SCell in SCG is activated or deactivated:

- an interruption on any serving cell in SCG:
 - of up to X2 slot, if the active serving cell is not in the same band as any of the SCells being activated or deactivated, or
 - of up to Y2 slot + $T_{\text{SMTC_duration}}$ if the active serving cells are in the same band as any of the SCells being activated or deactivated, provided the cell specific reference signals from the active serving cells and the SCells being activated or deactivated are available in the same slot, where, $T_{\text{SMTC_duration}}$ is
 - the longest SMTC duration among all above active serving cells in SCG and the SCell being activated when one SCell is activated;
 - the longest SMTC duration among all above active serving cells in SCG when one SCell is deactivated.

Where X2 and Y2 are specified in Table 8.2.1.2.4-2.

Table 8.2.1.2.4-1: Interruption length X2 and Y2 at E-UTRA SCell activation/deactivation

| μ | NR Slot length (ms) | Interruption length X2 (slots) | | Interruption length Y2 (slots) | |
|-------|---------------------|--------------------------------|-------|--------------------------------|-------|
| | | Sync | Async | Sync | Async |
| 0 | 1 | 1 | 2 | 1 | 2 |
| 1 | 0.5 | 1 | 2 | 1 | 2 |
| 2 | 0.25 | 3 | | 2 | 3 |
| 3 | 0.125 | 5 | | N/A | N/A |

Table 8.2.1.2.4-2: Interruption length X2 and Y2 at SCell activation/deactivation

| μ | NR Slot length (ms) of victim cell | Interruption length X2 (slots) | | Interruption length Y2 (slots) |
|-------|------------------------------------|--|---|--------------------------------|
| 0 | 1 | 1 | | 1 |
| 1 | 0.5 | 1 | | 1 |
| 2 | 0.25 | Both aggressor cell and victim cell are on FR2 | 2 | 2 |
| | | Either aggressor cell or victim cell is on FR1 | 3 | |
| 3 | 0.125 | Aggressor cell is on FR2 | 4 | 4 |
| | | Aggressor cell is on FR1 | 5 | |

8.2.1.2.5 Interruptions during measurements on SCC

8.2.1.2.5.1 Interruptions during measurements on deactivated NR SCC

Interruption on PCell and other activated NR SCell(s) during measurement on the deactivated NR SCC shall meet requirements in clause 8.2.2.2.3, where the term PCell in clause 8.2.2.2.3 shall be deemed to be replaced with PSCell.

8.2.1.2.5.2 Interruptions during measurements on deactivated E-UTRAN SCC

When one E-UTRA SCell in MCG is deactivated, the UE is allowed due to measurements on the E-UTRA SCC with the deactivated E-UTRA SCell:

- an interruption on PSCell or any activated SCell with up to 0.5% probability of missed ACK/NACK when any of the configured *measCycleSCell* [15] for the deactivated E-UTRA SCells is 640 ms or longer.

- an interruption on PSCell or any activated SCell with up to 0.5% probability of missed ACK/NACK regardless of the configured *measCycleSCell* [15] for the deactivated E-UTRA SCells if indicated by the network using IE *allowInterruptions* [15].

Each interruption shall not exceed

- X3 slot, if the PSCell or activated SCell is not in the same band as the E-UTRA deactivated SCC being measured, or
- Y3 slot + SMTC duration, if the PSCell or activated SCell is in the same band as the E-UTRA deactivated SCC being measured, provided the cell specific reference signals from the PSCell or activated SCell and the E-UTRA deactivated SCC being measured are available in the same slot.

Table 8.2.1.2.5.2-1: Interruption length X3 and Y3 at measurements on deactivated E-UTRA SCC

| μ | NR Slot length (ms) | Interruption length X3 (slots) | | Interruption length Y3 (slots) | |
|-------|---------------------|--------------------------------|-------|--------------------------------|-------|
| | | Sync | Async | Sync | Async |
| 0 | 1 | 1 | 2 | 1 | 2 |
| 1 | 0.5 | 1 | 2 | 1 | 2 |
| 2 | 0.25 | 3 | | 2 | 3 |
| 3 | 0.125 | 5 | | N/A | N/A |

8.2.1.2.6 Interruptions at UL carrier RRC reconfiguration

The requirements in this clause shall apply when a supplementary UL carrier or an UL carrier is configured or de-configured in NR non-standalone operation as defined in TS 38.331 [2].

When an UL carrier or supplementary UL carrier is configured or de-configured, an interruption of up to X4 slot, is allowed during the RRC reconfiguration procedure [2] on E-UTRA PCell, all activated E-UTRA SCells, PSCell and all activated SCells within the same FR as the reconfigured uplink carrier. The interruption is for both uplink and downlink of E-UTRA PCell, all activated E-UTRA SCells, PSCell and all activated SCells within the same FR as the configured or de-configured UL.

Table 8.2.1.2.6-1: Interruption length X4 at UL carrier RRC reconfiguration

| μ | NR Slot length (ms) | Interruption length X4 (slots) | |
|-------|---------------------|--------------------------------|-------|
| | | Sync | Async |
| 0 | 1 | 1 | 2 |
| 1 | 0.5 | 2 | 3 |
| 2 | 0.25 | 5 | |
| 3 | 0.125 | 9 | |

8.2.1.2.7 Interruptions due to Active BWP switching Requirement

The requirements for DCI-based and timer-based BWP switches in this clause only apply to the case that the BWP switch is performed on a single CC.

When UE receives a DCI indicating UE to switch its active BWP involving changes in any of the parameters listed in Table 8.2.1.2.7-2, the UE is allowed to cause interruption of up to X slot to other active serving cells if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 8.2.1.2.7-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 8.2.1.2.7-1. The starting time of interruption is only allowed within the BWP switching delay $T_{\text{BWPswitchDelay}}$ as defined in clause 8.6.2. Interruptions are not allowed during BWP switch involving any other parameter change.

When a BWP timer *bwp-InactivityTimer* defined in TS 38.331 [2] expires, UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active BWP involving changes in any of the parameters listed in Table 8.2.1.2.7-2 if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the

BWP switch imposes changes in any of the parameters listed in Table 8.2.1.2.7-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 8.2.1.2.7-1. The starting time of interruption is only allowed within the BWP switching delay $T_{\text{BWPswitchDelay}}$ as defined in clause 8.6.2. Interruptions are not allowed during BWP switch involving any other parameter change.

When UE receives an RRC reconfiguration that only requests UE to switch its active BWP on one single CC, the UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active BWP involving changes in any of the parameters listed in Table 8.2.1.2.7-2 if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 8.2.1.2.7-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 8.2.1.2.7-1. The interruption is only allowed within the delay $T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}$ defined in clause 8.6.3.

Table 8.2.1.2.7-1: interruption length X

| μ | NR Slot length (ms) | Interruption length X (slots) |
|--------|---------------------|-------------------------------|
| 0 | 1 | 1 |
| 1 | 0.5 | 1 |
| 2 | 0.25 | 3 |
| 3 | 0.125 | 5 |
| Note1: | void | |

Table 8.2.1.2.7-2: Parameters which cause interruption other than SCS

| Parameters | Comment |
|-----------------------------|--------------------|
| <i>locationAndBandwidth</i> | From TS 38.331 [2] |
| <i>nrofSRS-Ports</i> | |

8.2.2 SA: Interruptions with Standalone NR Carrier Aggregation

8.2.2.1 Introduction

This clause contains the requirements related to the interruptions on PCell and activated SCell if configured, when

- up to 7 SCells are configured, de-configured, activated or deactivated, or
- a supplementary UL carrier or an UL carrier is configured or de-configured, or
- measurements on SCC with deactivated SCell in NR SCG, or
- UL/DL BWP is switched on PCell or SCell.

Note: interruptions at SCell addition/release, activation/deactivation and during measurements on SCC may not be required by all UEs.

The interruptions shall not interrupt RRC signalling or ACK/NACKs related to RRC reconfiguration procedure [2] for SCell addition/release or MAC control signalling [17] for SCell activation/deactivation command.

This clause additionally contains requirements related to interruptions at inter-frequency SFTD between PCell in FR1 and neighbour cell in FR2.

For a UE which does not support per-FR measurement gap, interruptions to the PCell and activated SCell may be caused by SCells on any frequency range. For a UE which supports per-FR gap, interruptions to PCell and activated SCell may be caused by SCells on the same frequency range as the victim cell.

8.2.2.2 Requirements

8.2.2.2.1 Interruptions at SCell addition/release

When any number of SCells between one and 7 is added or released using the same *RRCConnectionReconfiguration* message as defined in TS 38.331 [2], the UE is allowed an interruption on any active serving cell during the RRC reconfiguration procedure as follows:

- an interruption on any active serving cell:
 - of up to the duration shown in table 8.2.2.2.1-1, if the active serving cell is not in the same band as any of the SCells being added or released, or
 - of up to the duration shown in table 8.2.2.2.1-2, if the active serving cells are in the same band as any of the SCells being added or released, provided the cell specific reference signals from the active serving cells and the SCells being added or released are available in the same slot.

Table 8.2.2.2.1-1: Interruption duration for SCell addition/release for inter-band CA

| μ | NR Slot length (ms) of victim cell | Interruption length (slots) | |
|-------|------------------------------------|--|---|
| 0 | 1 | 1 | |
| 1 | 0.5 | 2 | |
| 2 | 0.25 | Both aggressor cell and victim cell are on FR2 | 4 |
| | | Either aggressor cell or victim cell is on FR1 | 5 |
| 3 | 0.125 | Aggressor cell is on FR2 | 8 |
| | | Aggressor cell is on FR1 | 9 |

Table 8.2.2.2.1-2: Interruption duration for SCell addition/release for intra-band CA

| μ | NR Slot length (ms) | Interruption length (slot) |
|--|---------------------|--|
| 0 | 1 | $1 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$ |
| 1 | 0.5 | $2 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$ |
| 2 | 0.25 | $4 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$ |
| 3 | 0.125 | $8 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$ |
| NOTE 1: $T_{\text{SMTC_duration}}$ measured in subframes is - the longest SMTC duration among all above active serving cells and the SCell being added when one SCell is added; - the longest SMTC duration among all active serving cells in the same band when one SCell is released. | | |
| NOTE 2: $N_{\text{slot}}^{\text{subframe}, \mu}$ is as defined in TS 38.211 [6]. | | |

8.2.2.2.2 Interruptions at SCell activation/deactivation

When an intra-band SCell is activated or deactivated as defined in TS 37.340 [17], the UE is allowed

- an interruption on any active serving cell:
 - of up to the duration shown in table 8.2.2.2.2-1, if the active serving cell is not in the same band as any of the SCells being activated or deactivated, or
 - of up to the duration shown in table 8.2.2.2.2-2, if the active serving cells are in the same band as any of the SCells being activated or deactivated provided the cell specific reference signals from the active serving cells and the SCells being activated or deactivated are available in the same slot.

Table 8.2.2.2.2-1: Interruption duration for SCell activation/deactivation for inter-band CA

| μ | NR Slot length (ms) of victim cell | Interruption length (slots) | |
|-------|------------------------------------|--|---|
| 0 | 1 | | 1 |
| 1 | 0.5 | | 1 |
| 2 | 0.25 | Both aggressor cell and victim cell are on FR2 | 2 |
| | | Either aggressor cell or victim cell is on FR1 | 3 |
| 3 | 0.125 | Aggressor cell is on FR2 | 4 |
| | | Aggressor cell is on FR1 | 5 |

Table 8.2.2.2.2-2: Interruption duration for SCell activation/deactivation for intra-band CA

| μ | NR Slot length (ms) | Interruption length (slots) |
|---|---------------------|---|
| 0 | 1 | $1 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe},\mu}$ |
| 1 | 0.5 | $1 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe},\mu}$ |
| 2 | 0.25 | $2 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe},\mu}$ |
| 3 | 0.125 | $4 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe},\mu}$ |
| NOTE 1: $T_{\text{SMTC_duration}}$ measured in subframes is - the longest SMTC duration among all above active serving cells and the SCell being activated when one SCell is activated; - the longest SMTC duration among all active serving cells in the same band when one SCell is deactivated. | | |
| NOTE 2: $N_{\text{slot}}^{\text{subframe},\mu}$ is as defined in TS 38.211 [6]. | | |

8.2.2.2.3 Interruptions during measurements on deactivated SCC

Interruptions on PCell due to measurements when an SCell is deactivated are allowed with up to 0.5% probability of missed ACK/NACK when the configured *measCycleSCell* [2] is 640 ms or longer. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption shall not exceed requirement in Table 8.2.2.2.2-1 if the PCell is not in the same band as the deactivated SCell. Each interruption shall not exceed requirement in Table 8.2.2.2.2-2 if the PCell is in the same band as the deactivated SCell.

Interruptions on activated SCells due to measurements when an SCell is deactivated are allowed with up to 0.5% probability of missed ACK/NACK when the configured *measCycleSCell* [2] is 640 ms or longer. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption shall not exceed requirement in Table 8.2.2.2.2-1 if the activated SCell is not in the same band as the deactivated SCell. Each interruption shall not exceed requirement in Table 8.2.2.2.2-2 if the activated SCell is in the same band as the deactivated SCell.

8.2.2.2.4 Interruptions at UL carrier RRC reconfiguration

The requirements in this clause shall apply when a supplementary UL carrier or an UL carrier is configured or de-configured in NR standalone carrier aggregation as defined in TS 38.331 [2].

When an UL carrier or supplementary UL carrier is configured or de-configured, an interruption of up to the duration shown in table 8.2.2.2.4-1, is allowed during the RRC reconfiguration procedure [2] on PCell and all activated SCells within the same FR as the reconfigured uplink carrier. The interruption is for both uplink and downlink of PCell and all the activated SCells within the same FR as the configured or de-configured UL.

Table 8.2.2.2.4-1: Interruption duration for UL carrier RRC reconfiguration

| μ | NR Slot length (ms) | Interruption length (slots) |
|-------|---------------------|-----------------------------|
| 0 | 1 | 1 |
| 1 | 0.5 | 2 |
| 2 | 0.25 | 4 |
| 3 | 0.125 | 8 |

8.2.2.2.5 Interruptions due to Active BWP switching Requirement

The requirements for DCI-based and timer-based BWP switches in this clause only apply to the case that the BWP switch is performed on a single CC.

When UE receives a DCI indicating UE to switch its active BWP involving changes in any of the parameters listed in Table 8.2.2.2.5-2, the UE is allowed to cause interruption of up to X slot to other active serving cells if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 8.2.2.2.5-2 and the UE is capable of per-FR gap the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 8.2.2.2.5-1. The starting time of interruption is only allowed within the BWP switching delay $T_{\text{BWPswitchDelay}}$ as defined in clause 8.6.2. Interruptions are not allowed during BWP switch involving any other parameter change.

When a BWP timer *bwp-InactivityTimer* defined in TS 38.331 [2] expires, UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active BWP involving changes in any of the parameters listed in Table 8.2.2.2.5-2 if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 8.2.2.2.5-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 8.2.2.2.5-1. The starting time of interruption is only allowed within the BWP switching delay $T_{\text{BWPswitchDelay}}$ as defined in clause 8.6.2. Interruptions are not allowed during BWP switch involving any other parameter change.

When UE receives an RRC reconfiguration that only requests UE to switch its active BWP on one single CC, the UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active BWP involving changes in any of the parameters listed in Table 8.2.2.2.5-2 if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 8.2.2.2.5-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 8.2.2.2.5-1. The interruption is only allowed within the delay $T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}$ defined in clause 8.6.3.

Table 8.2.2.2.5-1: Interruption length X

| μ | NR Slot length (ms) | Interruption length X (slots) |
|--------|---------------------|-------------------------------|
| 0 | 1 | 1 |
| 1 | 0.5 | 1 |
| 2 | 0.25 | 3 |
| 3 | 0.125 | 5 |
| Note1: | void | |

Table 8.2.2.2.5-2: Parameters which cause interruption other than SCS

| Parameters | Comment |
|-----------------------------|--------------------|
| <i>locationAndBandwidth</i> | From TS 38.331 [2] |
| <i>nrofSRS-Ports</i> | |

8.2.2.2.6 Interruptions at inter-frequency SFTD measurement

The requirements in this clause concern interruptions on PCell, as well as on activated SCells in MCG, when the UE is performing SFTD measurements on inter-frequency neighbour cell(s). The following requirements apply when no PSCell is configured.

For a UE with per-FR gap capability:

- for neighbour cell in FR1:
 - the percentage of interrupted slots on uplink and downlink on FR1 serving cells during the SFTD measurement period $T_{\text{measure_SFTD1}}$ specified in Clause 9.3.8 shall not exceed the percentages specified in Table 8.2.2.2.6-1. No interruption is allowed on FR2 serving cells.
 - the length of each interruption on FR1 serving cells shall not exceed the number of slots specified in Table 8.2.2.2.6-2.
- for neighbour cell in FR2:
 - the percentage of interrupted slots on uplink and downlink on FR2 serving cells during the SFTD measurement period $T_{\text{measure_SFTD1}}$ specified in Clause 9.3.8 shall not exceed the percentages specified in Table 8.2.2.2.6-1. No interruption is allowed on FR1 serving cells.
 - the length of each interruption on FR2 serving cells shall not exceed the number of slots specified in Table 8.2.2.2.6-2.

For a UE with per-UE gap capability:

- for neighbour cell in FR1 or FR2:
 - the percentage of interrupted slots on uplink and downlink on FR1 and FR2 serving cells during the SFTD measurement period $T_{\text{measure_SFTD1}}$ specified in Clause 9.3.8 shall not exceed the percentages specified in Table 8.2.2.2.6-1.
 - the length of each interruption on FR1 and FR2 serving cells shall not exceed the number of slots specified in Table 8.2.2.2.6-2.

Table 8.2.2.2.6-1: Requirements on maximum percentage of interrupted slots in serving cell in inter-frequency SFTD

| SFTD configuration | Serving cell μ | Neighbour cell SMTC periodicity | | | | | |
|---------------------|--------------------|---------------------------------|------|------|------|------|-------|
| | | 5ms | 10ms | 20ms | 40ms | 80ms | 160ms |
| With RSRP report | 0 | 8.4% | 6.3% | 8.4% | 6.3% | 5.3% | 4.7% |
| | 1 | | | | | | |
| | 2 | | | | | | |
| | 3 | | | | | | |
| Without RSRP report | 0 | 11.4% | 8.6% | 7.9% | 6.8% | 6.3% | 6.0% |
| | 1 | | | | | | |
| | 2 | | | | | | |
| | 3 | | | | | | |

Table 8.2.2.2.6-2: Interruption duration for FR1 serving cell in inter-frequency SFTD with neighbour cell in FR1

| μ | NR Slot length (ms) | Interruption length (slots) |
|-------|---------------------|-----------------------------|
| 0 | 1 | 1 |
| 1 | 0.5 | 2 |
| 2 | 0.25 | 4 |
| 3 | 0.125 | 8 |

Table 8.2.2.2.6-3: Void**Table 8.2.2.2.6-4: Void**

8.2.3 NE-DC Interruptions

8.2.3.1 Introduction

This clause contains the requirements related to the interruptions on PCell and SCell, when

E-UTRA PSCell transitions between active and non-active during DRX, or

E-UTRA PSCell transitions from non-DRX to DRX, or

E-UTRA PSCell/SCell in SCG or SCell in MCG is added or released, or

E-UTRA PSCell/SCell in SCG or SCell in MCG is activated or deactivated, or

measurements on SCC with deactivated SCell in either E-UTRA SCG or NR MCG or

PUSCH/PUCCH carrier configuration and deconfiguration in NR MCG, or

UL/DL BWP is switched on PCell or SCell in MCG.

The requirements shall apply for NE-DC with an NR PCell.

This clause contains interruptions where victim cell is PCell or SCell belonging to MCG. Requirements for interruptions requirements when the victim cell is E-UTRA PSCell or E-UTRA SCell belonging to SCG are specified in TS 36.133 [15].

For a UE which does not support per-FR measurement gap, interruptions to the PCell, E-UTRA PSCell or activated MCG SCells may be caused by EUTRA PSCell, EUTRA SCells or SCells on any frequency range. For UE which support per-FR gap, interruptions to the PCell, E-UTRA PSCell or activated MCG SCells may be caused by EUTRA PSCell, EUTRA SCells or SCells on the same frequency range as the victim cell.

8.2.3.2 Requirements

8.2.3.2.1 Interruptions at transitions between active and non-active during DRX

Interruption on PCell and the activated SCell if configured due to E-UTRA PSCell transitions between active and non-active during DRX when PCell or SCell is in non-DRX are allowed with up to 1% probability of missed ACK/NACK when the configured E-UTRA PSCell DRX cycle is less than 640 ms, and 0.625% probability of missed ACK/NACK is allowed when the configured E-UTRA PCell DRX cycle is 640 ms or longer. Each interruption shall not exceed X slot as defined in table 8.2.3.2.1-1.

Table 8.2.3.2.1-1: Interruption length X at transition between active and non-active during DRX

| μ | NR slot length (ms) | Interruption length X (slots) | |
|-------|---------------------|-------------------------------|-------|
| | | Sync | Async |
| 0 | 1 | 1 | 2 |
| 1 | 0.5 | 1 | 2 |
| 2 | 0.25 | 3 | |
| 3 | 0.125 | 5 | |

When both PCell and E-UTRA PSCell are in DRX, no interruption is allowed.

8.2.3.2.2 Interruptions at transitions from non-DRX to DRX

Interruption on PCell and the activated SCell if configured due to E-UTRA PSCell transitions from non-DRX to DRX when PCell or SCell is in non-DRX shall not exceed X slot as defined in table 8.2.3.2.1-1.

8.2.3.2.3 Interruptions at PSCell/SCell addition/release

The requirements in this clause shall apply for the UE configured with E-UTRA PSCell.

When one E-UTRA PSCell/SCell in SCG is added or released:

- the UE is allowed an interruption on any active serving cell in MCG:
 - of up to X1 slots, if the active serving cell is not in the same band as any of the E-UTRA PSCell/SCells being added or released, or
 - of up to $\max\{Y1 \text{ slots} + T_{\text{SMTC_duration}}, 5\text{ms}\}$ if the active serving cells are in the same band as any of the E-UTRA PSCell/SCells being added or released, provided the cell specific reference signals from the active serving cells and the E-UTRA PSCell/SCells being added or released are available in the same slot, where $T_{\text{SMTC_duration}}$ is the longest SMTC duration among all above activated serving cells in MCG;

Where X1 and Y1 are specified in Table 8.2.3.2.3-1.

When one SCell in MCG is added or released:

- the UE is allowed an interruption on any activated serving cell in MCG:
 - of up to X1 slots, if the active serving cell is not in the same band as any of the SCells being added or released, or
 - of up to $Y1 \text{ slots} + T_{\text{SMTC_duration}}$ if the active serving cells are in the same band as any of the SCells being added or released, provided the cell specific reference signals from the active serving cells and the SCells being added or released are available in the same slot, where, $T_{\text{SMTC_duration}}$ is
 - the longest SMTC duration among all above active serving cells in MCG and the SCell being added when one SCell is added;
 - the longest SMTC duration among all above active serving cells in MCG when one SCell is released.

Where X1 and Y1 are specified in Table 8.2.3.2.3-2.

Table 8.2.3.2.3-1: Interruption length X1 and Y1 at E-UTRA PSCell/SCell addition/release

| μ | NR Slot length (ms) | Interruption length X1 (slots) | | Interruption length Y1 (slots) | |
|-------|---------------------|--------------------------------|-------|--------------------------------|-------|
| | | Sync | Async | Sync | Async |
| 0 | 1 | 1 | 2 | 1 | 2 |
| 1 | 0.5 | 2 | 3 | 2 | 3 |
| 2 | 0.25 | 5 | | 4 | 5 |
| 3 | 0.125 | 9 | | N/A | N/A |

Table 8.2.3.2.3-2: Interruption length X1 and Y1 at SCell addition/Release

| μ | NR Slot length (ms) of victim cell | Interruption length X1 (slots) | | Interruption length Y1 (slots) |
|-------|------------------------------------|--|---|--------------------------------|
| | | | | |
| 0 | 1 | 1 | | 1 |
| 1 | 0.5 | 2 | | 2 |
| 2 | 0.25 | Both aggressor cell and victim cell are on FR2 | 4 | 4 |
| | | Either aggressor cell or victim cell is on FR1 | 5 | |
| 3 | 0.125 | Aggressor cell is on FR2 | 8 | 8 |
| | | Aggressor cell is on FR1 | 9 | |

8.2.3.2.4 Interruptions at SCell activation/deactivation

The requirements in this clause shall apply for the UE configured with E-UTRA PSCell and one SCell.

When one E-UTRA SCell in SCG is activated or deactivated:

- the UE is allowed an interruption on any active serving cell in MCG:
 - of up to X2 slots, if the active serving cell is not in the same band as any of the E-UTRA SCells being activated or deactivated, or
 - of up to $\max\{Y2 \text{ slots} + T_{\text{SMTC_duration}}, 5\text{ms}\}$ if the active serving cells are in the same band as any of the E-UTRA SCells being activated or deactivated, provided the cell specific reference signals from the active serving cells and the E-UTRA SCells being activated or deactivated are available in the same slot, where $T_{\text{SMTC_duration}}$ is the longest SMTC duration among all above active serving cells in MCG.

Where X2 and Y2 are specified in Table 8.2.3.2.4-1.

When one SCell in MCG is activated or deactivated:

- the UE is allowed an interruption on any serving cell in MCG:
 - of up to X2 slots, if the active serving cell is not in the same band as any of the SCells being activated or deactivated, or
 - of up to $Y2 \text{ slots} + T_{\text{SMTC_duration}}$ if the active serving cells are in the same band as any of the SCells being activated or deactivated, provided the cell specific reference signals from the active serving cells and the SCells being activated or deactivated are available in the same slot, where, $T_{\text{SMTC_duration}}$ is
 - the longest SMTC duration among all above active serving cells in MCG and the SCell being activated when one SCell is activated;
 - the longest SMTC duration among all above active serving cells in MCG when one SCell is deactivated.

Where X2 and Y2 are specified in Table 8.2.3.2.4-2.

Table 8.2.3.2.4-1: Interruption length X2 and Y2 at E-UTRA SCell activation/deactivation

| μ | NR Slot length (ms) | Interruption length X2 (slots) | | Interruption length Y2 (slots) | |
|-------|---------------------|--------------------------------|-------|--------------------------------|-------|
| | | Sync | Async | Sync | Async |
| 0 | 1 | 1 | 2 | 1 | 2 |
| 1 | 0.5 | 1 | 2 | 1 | 2 |
| 2 | 0.25 | 3 | | 2 | 3 |
| 3 | 0.125 | 5 | | N/A | N/A |

Table 8.2.3.2.4-2: Interruption length X2 and Y2 at SCell activation/deactivation

| μ | NR Slot length (ms) of victim cell | Interruption length X2 (slots) | | Interruption length Y2 (slots) |
|-------|------------------------------------|--|--|--------------------------------|
| | | Both aggressor cell and victim cell are on FR2 | Either aggressor cell or victim cell is on FR1 | |
| 0 | 1 | 1 | | 1 |
| 1 | 0.5 | 1 | | 1 |
| 2 | 0.25 | Both aggressor cell and victim cell are on FR2 | 2 | 2 |
| | | Either aggressor cell or victim cell is on FR1 | 3 | |
| 3 | 0.125 | Aggressor cell is on FR2 | 4 | 4 |
| | | Aggressor cell is on FR1 | 5 | |

8.2.3.2.5 Interruptions during measurements on SCC

8.2.3.2.5.1 Interruptions during measurements on deactivated NR SCC

Interruption on PCell and other activated SCell(s) during measurement on the deactivated NR SCC shall meet requirements in clause 8.2.2.2.3.

8.2.3.2.5.2 Interruptions during measurements on deactivated E-UTRAN SCC

When one E-UTRA SCell in SCG is deactivated, the UE is allowed due to measurements on the E-UTRA SCC with the deactivated E-UTRA SCell:

- an interruption on PCell or any activated SCell with up to 0.5% probability of missed ACK/NACK when any of the configured *measCycleSCell* [15] for the deactivated E-UTRA SCells is 640 ms or longer.
- an interruption on PCell or any activated SCell with up to 0.5% probability of missed ACK/NACK regardless of the configured *measCycleSCell* [15] for the deactivated E-UTRA SCells if indicated by the network using IE *allowInterruptions* [15].

Each interruption shall not exceed

- X3 slots, if the PCell or activated SCell is not in the same band as the E-UTRA deactivated SCC being measured, or
- Y3 slots + SMTC duration, if the PCell or activated SCell is in the same band as the E-UTRA deactivated SCC being measured, provided the cell specific reference signals from the PCell or activated SCell and the E-UTRA deactivated SCC being measured are available in the same slot.

Where X3 and Y3 are specified in Table 8.2.3.2.5-1

Table 8.2.3.2.5-1: Interruption length X3 and Y3 at measurements on deactivated E-UTRA SCC

| μ | NR Slot length (ms) | Interruption length X3 (slots) | | Interruption length Y3 (slot) | |
|-------|---------------------|--------------------------------|-------|-------------------------------|-------|
| | | Sync | Async | Sync | Async |
| 0 | 1 | 1 | 2 | 1 | 2 |
| 1 | 0.5 | 1 | 2 | 1 | 2 |
| 2 | 0.25 | 3 | | 2 | 3 |
| 3 | 0.125 | 5 | | N/A | N/A |

8.2.3.2.6 Interruptions at UL carrier RRC reconfiguration

The requirements in this clause shall apply when a supplementary UL carrier or an UL carrier is configured or de-configured in NE-DC.

When an UL carrier or supplementary UL carrier is configured or deconfigured, an interruption of up to X4 slot as specified in Table 8.2.3.2.6-1, is allowed during the RRC reconfiguration procedure in TS 38.331 [2] on PCell, all activated SCells within the same FR as the reconfigured uplink carrier. The interruption is for both uplink and downlink of PCell, all activated E-UTRA SCells, E-UTRA PSCell and all activated SCells within the same FR as the configured or de-configured UL.

Table 8.2.3.2.6-1: Interruption length X4 at UL carrier RRC reconfiguration

| μ | NR Slot length (ms) | Interruption length X4 (slots) | |
|-------|---------------------|--------------------------------|-------|
| | | Sync | Async |
| 0 | 1 | 1 | 2 |
| 1 | 0.5 | 2 | 3 |
| 2 | 0.25 | 5 | |
| 3 | 0.125 | 9 | |

8.2.3.2.7 Interruptions due to Active BWP switching Requirement

The requirements for DCI-based and timer-based BWP switches in this clause only apply to the case that the BWP switch is performed on a single CC.

When UE receives a DCI indicating the UE to switch its active BWP, or when a BWP timer *bwp-InactivityTimer* defined in TS 38.331 [2] expires, or when the UE receives an RRC command indicating the UE to switch its active BWP, the UE is allowed an interruption on PCell and any activated SCells as defined in clause 8.2.2.2.5.

8.2.4 NR-DC: Interruptions

8.2.4.1 Introduction

This clause contains the requirements related to the interruptions on PCell, PSCell and activated SCell if configured, when

SCells are configured, de-configured, activated or deactivated or,
a supplementary UL carrier or an UL carrier is configured or de-configured, or
measurements on SCC with deactivated SCell in NR SCG, or
UL/DL BWP is switched on PCell, PSCell or SCell. transitions between active and non-active during DRX, or
transitions from non-DRX to DRX.

Note: interruptions at SCell addition/release, activation/deactivation and during measurements on SCC may not be required by all UEs.

The interruptions shall not interrupt RRC signalling or ACK/NACKs related to RRC reconfiguration procedure [2] for SCell addition/release or MAC control signalling [17] for SCell activation/deactivation command. How to specify this is FFS.

The requirements shall apply for NR-DC with an NR PCell, PSCell or SCell.

For a UE which does not support per-FR measurement gap, interruptions to the PCell and activated SCell may be caused by SCells on any frequency range. For a UE which supports per-FR gaps, interruptions to PCell, PSCell and activated SCell may be caused by SCells on the same frequency range as the victim cell.

8.2.4.2 Requirements

8.2.4.2.1 Interruptions at PSCell/SCell addition/release

When PSCell or one or more SCells is added or released using the same *RRCConnectionReconfiguration* message as defined in TS 38.331 [2], the UE is allowed an interruption on any activated serving cell during the RRC reconfiguration procedure as follows:

- an interruption on any active serving cell:
 - of up to the duration shown in table 8.2.4.2.1-1, if the active serving cell is not in the same band as any of the SCells being added or released, or
 - of up to the duration shown in table 8.2.4.2.1-2, if the active serving cells are in the same band as any of the SCells being added or released, provided the cell specific reference signals from the active serving cells and the SCells being added or released are available in the same slot.

Table 8.2.4.2.1-1: Interruption duration for PSCell/SCell addition/release for inter-band DC/CA

| μ | NR Slot length (ms) of victim cell | Interruption length (slots) | |
|-------|------------------------------------|--|---|
| 0 | 1 | 1 | |
| 1 | 0.5 | 2 | |
| 2 | 0.25 | Both aggressor cell and victim cell are on FR2 | 4 |
| | | Either aggressor cell or victim cell is on FR1 | 5 |
| 3 | 0.125 | Aggressor cell is on FR2 | 8 |
| | | Aggressor cell is on FR1 | 9 |

Table 8.2.4.2.1-2: Interruption duration for SCell addition/release for intra-band DC/CA

| μ | NR Slot length (ms) | Interruption length (slots) |
|---|---------------------|--|
| 0 | 1 | $1 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$ |
| 1 | 0.5 | $2 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$ |
| 2 | 0.25 | $4 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$ |
| 3 | 0.125 | $8 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$ |
| NOTE 1: $T_{\text{SMTC_duration}}$ measured in subframes is - the longest SMTC duration among all above activeserving cells and the SCell being added when one SCell is added; - the longest SMTC duration among all active serving cells in the same band when one SCell is released. | | |
| NOTE 2: $N_{\text{slot}}^{\text{subframe}, \mu}$ is as defined in TS 38.211 [6]. | | |

8.2.4.2.2 Interruptions at SCell activation/deactivation

When a SCell is activated or deactivated as defined in TS 37.340 [17], the UE is allowed

- an interruption on any active serving cell:
 - of up to the duration shown in table 8.2.4.2.2-1, if the active serving cell is not in the same band as any of the SCells being activated or deactivated, or
 - of up to the duration shown in table 8.2.4.2.2-2, if the active serving cells are in the same band as any of the SCells being activated or deactivated provided the cell specific reference signals from the active serving cells and the SCells being activated or deactivated are available in the same slot.

Table 8.2.4.2.2-1: Interruption duration for SCell activation/deactivation for inter-band DC/CA

| μ | NR Slot length (ms) of victim cell | Interruption length (slots) | |
|-------|------------------------------------|--|---|
| 0 | 1 | 1 | |
| 1 | 0.5 | 1 | |
| 2 | 0.25 | Both aggressor cell and victim cell are on FR2 | 2 |
| | | Either aggressor cell or victim cell is on FR1 | 3 |
| 3 | 0.125 | Aggressor cell is on FR2 | 4 |
| | | Aggressor cell is on FR1 | 5 |

Table 8.2.4.2.2-2: Interruption duration for SCell activation/deactivation for intra-band DC/CA

| μ | NR Slot length (ms) | Interruption length (slots) |
|---|---------------------|---|
| 0 | 1 | $1 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe},\mu}$ |
| 1 | 0.5 | $1 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe},\mu}$ |
| 2 | 0.25 | $2 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe},\mu}$ |
| 3 | 0.125 | $4 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe},\mu}$ |
| NOTE 1: $T_{\text{SMTC_duration}}$ measured in subframes is - the longest SMTC duration among all above active serving cells and the SCell being activated when one SCell is activated; - the longest SMTC duration among all active serving cells in the same band when one SCell is deactivated. | | |
| NOTE 2: $N_{\text{slot}}^{\text{subframe},\mu}$ is as defined in TS 38.211 [6]. | | |

8.2.4.2.3 Interruptions during measurements on SCC

Interruptions on PCell due to measurements when an SCell is deactivated are allowed with up to 0.5% probability of missed ACK/NACK when the configured *measCycleSCell* [2] is 640 ms or longer. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption shall not exceed requirement in Table 8.2.2.2.2-1 if the PCell is not in the same band as the deactivated SCell. Each interruption shall not exceed requirement in Table 8.2.2.2.2-2 if the PCell is in the same band as the deactivated SCell.

Interruptions on activated SCell due to measurements when an SCell is deactivated are allowed with up to 0.5% probability of missed ACK/NACK when the configured *measCycleSCell* [2] is 640 ms or longer. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption shall not exceed requirement in Table 8.2.2.2.2-1 if the activated SCell is not in the same band as the deactivated SCell. Each interruption shall not exceed requirement in Table 8.2.2.2.2-2 if the activated SCell is in the same band as the deactivated SCell.

8.2.4.2.4 Interruptions at UL carrier RRC reconfiguration

The requirements in this clause shall apply when a supplementary UL carrier or an UL carrier is configured or de-configured in NR-DC as defined in TS 38.331 [2].

When an UL carrier or supplementary UL carrier is configured or de-configured, an interruption of up to the duration shown in table 8.2.4.2.4-1, is allowed during the RRC reconfiguration procedure in TS 38.331 [2] on all the other activated serving cells within the same FR as the reconfigured uplink carrier. The interruption is for both uplink and downlink of all the other serving cells within the same FR as the configured or de-configured UL.

Table 8.2.4.2.4-1: Interruption duration for UL carrier RRC reconfiguration

| μ | NR Slot length (ms) | Interruption length (slots) |
|-------|---------------------|-----------------------------|
| 0 | 1 | 1 |
| 1 | 0.5 | 2 |
| 2 | 0.25 | 4 |
| 3 | 0.125 | 8 |

8.2.4.2.5 Interruptions due to Active BWP switching Requirement

The requirements for DCI-based and timer-based BWP switches in this clause only apply to the case that the BWP switch is performed on a single CC.

When UE receives a DCI indicating the UE to switch its active BWP, or when a BWP timer *bwp-InactivityTimer* defined in TS 38.331 [2] expires, or when the UE receives an RRC command indicating the UE to switch its active BWP, the UE is allowed to cause an interruption on any other serving cells as defined in clause 8.2.2.2.5.

8.2.4.2.6 Interruptions at transitions between active and non-active during DRX

When PCell is in non-DRX and PSCell is in DRX, interruptions on PCell and the activated SCell in MCG if configured due to transitions from active to non-active and from non-active to active during PSCell DRX are allowed with up to 1% probability of missed ACK/NACK when the configured PSCell DRX cycle is less than 640 ms, and 0.625% probability of missed ACK/NACK is allowed when the configured PSCell DRX cycle is 640 ms or longer. Each interruption shall not exceed X slot as defined in table 8.2.4.2.6-1.

When PSCell is in non-DRX and PCell is in DRX, interruptions on PSCell on the activated SCell in SCG if configured due to transitions from active to non-active and from non-active to active during PCell DRX are allowed with up to 1% probability of missed ACK/NACK when the configured PCell DRX cycle is less than 640 ms, and 0.625% probability of missed ACK/NACK is allowed when the configured PCell DRX cycle is 640 ms or longer. Each interruption shall not exceed X slot as defined in table 8.2.4.2.6-1.

Table 8.2.4.2.6-1: Interruption length X at transition between active and non-active during DRX

| μ | NR Slot length (ms) | Interruption length X (slots) | |
|-------|---------------------|-------------------------------|-------|
| | | Sync | Async |
| 0 | 1 | 1 | 2 |
| 1 | 0.5 | 1 | 2 |
| 2 | 0.25 | 3 | |
| 3 | 0.125 | 5 | |

When both PCell and PSCell are in DRX, no interruption is allowed.

8.2.4.2.7 Interruptions at transitions from non-DRX to DRX

Interruption on PCell and the activated SCell in MCG if configured due to PSCell transitions from non-DRX to DRX when PCell is in non-DRX shall not exceed X slots as defined in table 8.2.4.2.6-1.

Interruption on PSCell and the activated SCell in SCG if configured due to PCell transitions from non-DRX to DRX when PSCell is in non-DRX shall not exceed X slots as defined in table 8.2.4.2.6-1.

8.3 SCell Activation and Deactivation Delay

8.3.1 Introduction

This clause defines requirements for the delay within which the UE shall be able to activate a deactivated SCell and deactivate an activated SCell in EN-DC, or in standalone NR carrier aggregation, or in NE-DC, or in NR-DC.

The requirements shall apply for EN-DC, standalone NR carrier aggregation, NE-DC, and NR-DC.

8.3.2 SCell Activation Delay Requirement for Deactivated SCell

The requirements in this clause shall apply for the UE configured with one downlink SCell in EN-DC, or in standalone NR carrier aggregation or in NE-DC or in NR-DC and when one SCell is being activated.

The delay within which the UE shall be able to activate the deactivated SCell depends upon the specified conditions.

Upon receiving SCell activation command in slot n , the UE shall be capable to transmit valid CSI report and apply actions related to the activation command for the SCell being activated no later than in slot $n +$

$\frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, where:

T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3]

$T_{\text{activation_time}}$ is the SCell activation delay in millisecond.

If the SCell is known and belongs to FR1, $T_{\text{activation_time}}$ is:

- $T_{\text{FirstSSB}} + 5\text{ms}$, if the SCell measurement cycle is equal to or smaller than 160ms.
- $T_{\text{FirstSSB_MAX}} + T_{\text{rs}} + 5\text{ms}$, if the SCell measurement cycle is larger than 160ms.

If the SCell is unknown and belongs to FR1, provided that the side condition $\hat{E}_s/I_{ot} \geq -2\text{dB}$ is fulfilled, $T_{\text{activation_time}}$ is:

- $T_{\text{FirstSSB_MAX}} + T_{\text{SMTC_MAX}} + 2 * T_{\text{rs}} + 5\text{ms}$

If the SCell being activated belongs to FR2 and if there is at least one active serving cell on that FR2 band, then $T_{\text{activation_time}}$ is $T_{\text{FirstSSB}} + 5\text{ms}$ provided:

- The UE is provided with SMTC for the target SCell, and
- The SSBs in the serving cell(s) and the SSBs in the SCell fulfil the condition defined in clause 3.6.3.
- The parameter *ssb-PositionsInBurst* is same for the serving cell(s) and the SCell.

If the SCell being activated belongs to FR2 and if there is at least one active serving cell on that FR2 band, if the UE is not provided with any SMTC for the target SCell, $T_{\text{activation_time}}$ is 3 ms, provided

- the RS (s) of SCell being activated is (are) QCL-TypeD with RS (s) of one active serving cell on that FR2 band.

If the SCell being activated belongs to FR2 and if there is no active serving cell on that FR2 band provided that PCell or PSCell is FR1:

If the target SCell is known to UE and semi-persistent CSI-RS is used for CSI reporting, then $T_{\text{activation_time}}$ is:

- $3\text{ms} + \max(T_{\text{uncertainty_MAC}} + T_{\text{FineTiming}} + 2\text{ms}, T_{\text{uncertainty_SP}})$, where $T_{\text{uncertainty_MAC}}=0$ and $T_{\text{uncertainty_SP}}=0$ if UE receives the SCell activation command, semi-persistent CSI-RS activation command and TCI state activation command at the same time.

If the target SCell is known to UE and periodic CSI-RS is used for CSI reporting, then $T_{\text{activation_time}}$ is:

- $\max(T_{\text{uncertainty_MAC}} + 5\text{ms} + T_{\text{FineTiming}}, T_{\text{uncertainty_RRC}} + T_{\text{RRC_delay}} - T_{\text{HARQ}})$, where $T_{\text{uncertainty_MAC}}=0$ if UE receives the SCell activation command and TCI state activation commands at the same time.

If the target SCell is unknown to UE and semi-persistent CSI-RS is used for CSI reporting, provided that the side condition $\hat{E}_s/I_{ot} \geq -2\text{dB}$ is fulfilled, then $T_{\text{activation_time}}$ is:

- $6\text{ms} + T_{\text{FirstSSB_MAX}} + 15 * T_{\text{SMTC_MAX}} + 8 * T_{\text{rs}} + T_{\text{L1-RSRP, measure}} + T_{\text{L1-RSRP, report}} + T_{\text{HARQ}} + \max(T_{\text{uncertainty_MAC}} + T_{\text{FineTiming}} + 2\text{ms}, T_{\text{uncertainty_SP}})$.

If the target SCell is unknown to UE and periodic CSI-RS is used for CSI reporting, provided that the side condition $\hat{E}_s/I_{ot} \geq -2\text{dB}$ is fulfilled, then $T_{\text{activation_time}}$ is:

- $3\text{ms} + T_{\text{FirstSSB_MAX}} + 15 * T_{\text{SMTC_MAX}} + 8 * T_{\text{rs}} + T_{\text{L1-RSRP, measure}} + T_{\text{L1-RSRP, report}} + \max \{ (T_{\text{HARQ}} + T_{\text{uncertainty_MAC}} + 5\text{ms} + T_{\text{FineTiming}}), (T_{\text{uncertainty_RRC}} + T_{\text{RRC_delay}}) \}$.

where,

$T_{\text{SMTC_MAX}}$:

- In FR1, in case of intra-band SCell activation, $T_{\text{SMTC_MAX}}$ is the longer SMTC periodicity between active serving cells and SCell being activated provided the cell specific reference signals from the active serving cells and the SCells being activated or released are available in the same slot; in case of inter-band SCell activation, $T_{\text{SMTC_MAX}}$ is the SMTC periodicity of SCell being activated.
- In FR2, $T_{\text{SMTC_MAX}}$ is the longer SMTC periodicity between active serving cells and SCell being activated provided that in Rel-15 only support FR2 intra-band CA.
- $T_{\text{SMTC_MAX}}$ is bounded to a minimum value of 10ms.

T_{rs} is the SMTC periodicity of the SCell being activated if the UE has been provided with an SMTC configuration for the SCell in SCell addition message, otherwise T_{rs} is the SMTC configured in the

measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement which involves T_{rs} is applied with $T_{rs} = 5\text{ms}$ assuming the SSB transmission periodicity is 5ms. There are no requirements if the SSB transmission periodicity is not 5ms.

T_{FirstSSB} : is the time to the end of the first complete SSB burst indicated by the SMTC after slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$

$T_{\text{FirstSSB_MAX}}$: Is the time to the end of the first complete SSB burst indicated by the SMTC after slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, further fulfilling:

- In FR1, in case of intra-band SCell activation, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot; in case of inter-band SCell activation, the first occasion when the SCell being activated is transmitting SSB burst.
- In FR2, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot.

$T_{\text{FineTiming}}$ is the time period between UE finish processing the last activation command for PDCCH TCI, PDSCH TCI (when applicable) and semi-persistent CSI-RS (when applicable) and the timing of first complete available SSB corresponding to the TCI state.

$T_{\text{L1-RSRP, measure}}$ is L1-RSRP measurement delay $T_{\text{L1-RSRP_Measurement_Period_SSB}}$ ms or $T_{\text{L1-RSRP_Measurement_Period_CSI-RS}}$ based on applicability as defined in clause 9.5 assuming $M=1$.

$T_{\text{L1-RSRP, report}}$ is delay of acquiring CSI reporting resources.

$T_{\text{uncertainty_MAC}}$ is the time period between reception of the last activation command for PDCCH TCI, PDSCH TCI (when applicable) relative to

- SCell activation command for known case;
- First valid L1-RSRP reporting for unknown case.

$T_{\text{uncertainty_SP}}$ is the time period between reception of the activation command for semi-persistent CSI-RS resource set for CQI reporting relative to

- SCell activation command for known case;
- First valid L1-RSRP reporting for unknown case.

$T_{\text{uncertainty_RRC}}$ is the time period between reception of the RRC configuration message for TCI of periodic CSI-RS for CQI reporting (when applicable) relative to

- SCell activation command for known case;
- First valid L1-RSRP reporting for unknown case.

$T_{\text{RRC_delay}}$ is the RRC procedure delay as specified in TS 38.331 [2].

Longer delays for RRM measurement requirements, and in case of FR2 also SSB based RLM/BFD/CBD/L1-RSRP measurement requirements, can be expected during the cell detection time for unknown SCell activation.

$T_{\text{CSI_reporting}}$ is the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2].

SCell in FR1 is known if it has been meeting the following conditions:

- During the period equal to $\max(5 \cdot \text{measCycleSCell}, 5 \cdot \text{DRX cycles})$ for FR1 before the reception of the SCell activation command:
- the UE has sent a valid measurement report for the SCell being activated and

- the SSB measured remains detectable according to the cell identification conditions specified in clause 9.2 and 9.3.
- the SSB measured during the period equal to $\max(5 \cdot \text{measCycleSCell}, 5 \cdot \text{DRX cycles})$ also remains detectable during the SCell activation delay according to the cell identification conditions specified in clause 9.2 and 9.3.

Otherwise SCell in FR1 is unknown.

For the first SCell activation in FR2 bands, the SCell is known if it has been meeting the following conditions:

- During the period equal to 4s for UE supporting power class1 and 3s for UE supporting power class 2/3/4 before UE receives the last activation command for PDCCH TCI, PDSCH TCI (when applicable) and semi-persistent CSI-RS for CQI reporting (when applicable):
 - the UE has sent a valid L3-RSRP measurement report with SSB index
 - SCell activation command is received after L3-RSRP reporting and no later than the time when UE receives MAC-CE command for TCI activation
- During the period from L3-RSRP reporting to the valid CQI reporting, the reported SSBs with indexes remain detectable according to the cell identification conditions specified in clauses 9.2 and 9.3, and the TCI state is selected based on one of the latest reported SSB indexes.

Otherwise, the first SCell in FR2 band is unknown. The requirement for unknown SCell applies provided that the activation commands for PDCCH TCI, PDSCH TCI (when applicable), semi-persistent CSI-RS for CQI reporting (when applicable), and configuration message for TCI of periodic CSI-RS for CQI reporting (when applicable) are based on the latest valid L1-RSRP reporting.

If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the activation command, $T_{\text{SMTc_Scell}}$ follows *smtc1* or *smtc2* according to the physical cell ID of the target cell being activated. $T_{\text{SMTc_MAX}}$ follows *smtc1* or *smtc2* according to the physical cell IDs of the target cells being activated and the active serving cells.

In addition to CSI reporting defined above, UE shall also apply other actions related to the activation command specified in TS 38.331 [2] for a SCell at the first opportunities for the corresponding actions once the SCell is activated.

The starting point of an interruption window on spCell or any activated SCell, as specified in clause 8.2, shall not occur before slot $n+1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ and not occur after slot $n+1 + \frac{T_{\text{HARQ}} + 3ms + T_X}{\text{NR slot length}}$, where NR slot length is with respect to the numerology used in the SCell being activated, and T_X is:

- T_{FirstSSB} , for any scenario where $T_{\text{activation_time}}$ includes T_{FirstSSB} ;
- $T_{\text{FirstSSB_MAX}}$, for any scenario where $T_{\text{activation_time}}$ includes $T_{\text{FirstSSB_MAX}}$;
- $T_{\text{uncertainty_MAC}} + T_{\text{FineTiming}}$, for any scenario where $T_{\text{activation_time}}$ includes $T_{\text{FineTiming}}$.

The length of the interruption window may be different for different victim cells, and depends on the applicable scenario and on the frequency band relation between the aggressor cell and the victim cell.

Starting from the slot specified in clause 4.3 of TS 38.213 [3] (timing for secondary Cell activation/deactivation) and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

Starting from the slot specified in clause 4.3 of TS 38.213 [3] (timing for secondary Cell activation/deactivation) and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

Starting from the slot specified in clause 4.3 of TS 38.213 [3] (timing for secondary Cell activation/deactivation) and until the UE has completed a first L1-RSRP measurement, the UE shall report lowest valid L1 SS-RSRP range if the UE has available uplink resources to report L1-RSRP for the SCell.

8.3.3 SCell Deactivation Delay Requirement for Activated SCell

The requirements in this clause shall apply for the UE configured with one downlink SCell in EN-DC, or in standalone NR carrier aggregation, or in NE-DC, or in NR-DC.

Upon receiving SCell deactivation command or upon expiry of the *sCellDeactivationTimer* in slot n , the UE shall accomplish the deactivation actions for the SCell being deactivated no later than in slot $n + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$.

The interruption on spCell or any activated SCell, as specified in clause 8.2, shall not occur before slot $n+1 + \frac{T_{HARQ}}{NR\ slot\ length}$ and not occur after slot $n+1 + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$.

8.4 UE UL carrier RRC reconfiguration delay

8.4.1 Introduction

The requirements in this clause apply for a UE being configured or deconfigured with a supplementary UL carrier or NR UL carrier.

8.4.2 UE UL carrier configuration delay requirement

When the UE receives a RRC message implying NR UL or supplementary UL carrier configuration, the UE shall be ready to start transmission on the newly configured carrier within $T_{UL_carrier_config}$ from the end of the last slot containing the RRC command.

$T_{UL_carrier_config}$ equals the maximum RRC procedure delay defined in clause 12 in TS 38.331 [2].

8.4.3 UE UL carrier deconfiguration delay requirement

When the UE receives a RRC message implying NR UL or supplementary UL carrier deconfiguration RRC signalling, the UE shall stop UL signalling on the deconfigured UL carrier within $T_{UL_carrier_deconfig}$ from the end of the last slot containing the RRC command.

$T_{UL_carrier_deconfig}$ equals the maximum RRC procedure delay defined in clause 12 in TS 38.331 [2].

8.5 Link Recovery Procedures

8.5.1 Introduction

The UE shall assess the downlink radio link quality of a serving cell based on the reference signal in the set \bar{Q}_0 as specified in TS 38.213 [3] in order to detect beam failure on:

- PCell in SA, NR-DC, or NE-DC operation mode,
- PSCell in NR-DC and EN-DC operation mode.

The RS resource configurations in the set \bar{Q}_0 can be periodic CSI-RS resources and/or SSBs. UE is not required to perform beam failure detection outside the active DL BWP. UE is not required to meet the requirements in clause 8.5.2 and 8.5.3 if UE does not have set \bar{Q}_0 .

On each RS resource configuration in the set \bar{Q}_0 , the UE shall estimate the radio link quality and compare it to the threshold Q_{out_LR} for the purpose of accessing downlink radio link quality of the serving cell beams.

The threshold Q_{out_LR} is defined as the level at which the downlink radio level link of a given resource configuration on set \bar{Q}_0 cannot be reliably received and shall correspond to the $BLER_{out} = 10\%$ block error rate of a hypothetical PDCCH transmission. For SSB based beam failure detection, $Q_{out_LR_SSB}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.5.2.1-1. For CSI-RS based beam failure detection, $Q_{out_LR_CSI-RS}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.5.3.1-1.

Upon request the UE shall deliver configuration indexes from the set \bar{Q}_1 as specified in TS 38.213 [3], to higher layers, and the corresponding L1-RSRP measurement provided that the measured L1-RSRP is equal to or better than the threshold Q_{in_LR} , which is indicated by higher layer parameter *rsrp-ThresholdSSB*. The UE applies the Q_{in_LR} threshold to the L1-RSRP measurement obtained from an SSB. The UE applies the Q_{in_LR} threshold to the L1-RSRP measurement obtained for a CSI-RS resource after scaling a respective CSI-RS reception power with a value provided by higher layer parameter *powerControlOffsetSS*. The RS resource configurations in the set \bar{Q}_1 can be periodic CSI-RS resources or SSBs or both SSB and CSI-RS resources. UE is not required to perform candidate beam detection outside the active DL BWP.

8.5.2 Requirements for SSB based beam failure detection

8.5.2.1 Introduction

The requirements in this clause apply for each SSB resource in the set \bar{Q}_0 configured for a serving cell, provided that the SSB configured for beam failure detection is actually transmitted within the UE active DL BWP during the entire evaluation period specified in clause 8.5.2.2.

Table 8.5.2.1-1: PDCCH transmission parameters for beam failure instance

| Attribute | Value for BLER |
|--|---------------------------------|
| DCI format | 1-0 |
| Number of control OFDM symbols | 2 |
| Aggregation level (CCE) | 8 |
| Ratio of hypothetical PDCCH RE energy to average SSS RE energy | 0dB |
| Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | 0dB |
| Bandwidth (PRBs) | 24 |
| Sub-carrier spacing (kHz) | Same as the SCS of RMSI CORESET |
| DMRS precoder granularity | REG bundle size |
| REG bundle size | 6 |
| CP length | Normal |
| Mapping from REG to CCE | Distributed |

8.5.2.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured SSB resource in set \bar{Q}_0 estimated over the last $T_{Evaluate_BFD_SSB}$ ms period becomes worse than the threshold $Q_{out_LR_SSB}$ within $T_{Evaluate_BFD_SSB}$ ms period.

The value of $T_{Evaluate_BFD_SSB}$ is defined in Table 8.5.2.2-1 for FR1.

The value of $T_{Evaluate_BFD_SSB}$ is defined in Table 8.5.2.2-2 for FR2 with scaling factor $N=8$

For FR1,

- $P = \frac{1}{1 - \frac{T_{SSB}}{MRGP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB.
- $P = 1$ when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

For FR2,

- $P = \frac{1}{1 - \frac{T_{SSB}}{T_{SMTCperiod}}}$, when BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$).

- $P = P_{\text{sharing factor}}$, when the BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC period ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$).
- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}} - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and
 - $T_{\text{SMTCperiod}} \neq \text{MGRP}$ or
 - $T_{\text{SMTCperiod}} = \text{MGRP}$ and $T_{\text{SSB}} < 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and $T_{\text{SMTCperiod}} = \text{MGRP}$ and $T_{\text{SSB}} = 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{\text{Min}(\text{MGRP}, T_{\text{SMTCperiod}})}}$, when the BFD-RS resource is partially overlapped with measurement gap ($T_{\text{SSB}} < \text{MGRP}$) and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is partially or fully overlapped with measurement gap.
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$) and SMTC occasion is partially overlapped with measurement gap ($T_{\text{SMTCperiod}} < \text{MGRP}$)

$P_{\text{sharing factor}} = 1$, if the BFD-RS resource outside measurement gap is

- not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, and;
- not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured. $P_{\text{sharing factor}} = 3$, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{\text{SMTCperiod}}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{\text{SMTCperiod}}$ corresponds to the value of higher layer parameter *smtc1*. $T_{\text{SMTCperiod}}$ is the shortest SMTC period among all CCs in the same FR2 band, given the SMTC offset of all CCs in FR2 provided the same offset.

Longer evaluation period would be expected if the combination of BFD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

Table 8.5.2.2-1: Evaluation period $T_{\text{Evaluate_BFD_SSB}}$ for FR1

| Configuration | $T_{\text{Evaluate_BFD_SSB}}$ (ms) |
|---|---|
| no DRX | $\text{Max}(50, \text{Ceil}(5 \times P) \times T_{\text{SSB}})$ |
| DRX cycle $\leq 320\text{ms}$ | $\text{Max}(50, \text{Ceil}(7.5 \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$ |
| DRX cycle $> 320\text{ms}$ | $\text{Ceil}(5 \times P) \times T_{\text{DRX}}$ |
| Note: T_{SSB} is the periodicity of SSB in the set \bar{q}_0 . T_{DRX} is the DRX cycle length. | |

Table 8.5.2.2-2: Evaluation period $T_{\text{Evaluate_BFD_SSB}}$ for FR2

| Configuration | $T_{\text{Evaluate_BFD_SSB}}$ (ms) |
|---|--|
| no DRX | $\text{Max}(50, \text{Ceil}(5 \times P \times N) \times T_{\text{SSB}})$ |
| DRX cycle $\leq 320\text{ms}$ | $\text{Max}(50, \text{Ceil}(7.5 \times P \times N) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$ |
| DRX cycle $> 320\text{ms}$ | $\text{Ceil}(5 \times P \times N) \times T_{\text{DRX}}$ |
| Note: T_{SSB} is the periodicity of SSB in the set \bar{q}_0 . T_{DRX} is the DRX cycle length. | |

8.5.2.3 Measurement restriction for SSB based beam failure detection

The UE is required to be capable of measuring SSB for BFD without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following clauses.

For FR1, when the SSB for BFD measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for BFD measurement without any restriction;
- If SSB and CSI-RS have different SCS,
 - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for BFD measurement without any restriction;
 - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for BFD measurement and CSI-RS. Longer measurement period for SSB based BFD measurement is expected, and no requirements are defined.

For FR2, when the SSB for BFD measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for BFD measurement and CSI-RS. Longer measurement period for SSB based BFD measurement is expected, and no requirements are defined.

8.5.3 Requirements for CSI-RS based beam failure detection

8.5.3.1 Introduction

The requirements in this clause apply for each CSI-RS resource in the set \bar{q}_0 of resource configurations for a serving cell, provided that the CSI-RS resource(s) in set \bar{q}_0 for beam failure detection are actually transmitted within the UE active DL BWP during the entire evaluation period specified in clause 8.5.3.2. UE is not expected to perform beam failure detection measurements on the CSI-RS configured for BFD if the CSI-RS is not QCL-ed, with QCL-TypeD when applicable, with the RS in the active TCI state of any CORESET configured in the UE active BWP.

Table 8.5.3.1-1: PDCCH transmission parameters for beam failure instance

| Attribute | Value for BLER |
|---|--------------------------|
| DCI format | 1-0 |
| Number of control OFDM symbols | 2 |
| Aggregation level (CCE) | 8 |
| Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | 0dB |
| Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | 0dB |
| Bandwidth (PRBs) | 48 |
| Sub-carrier spacing (kHz) | SCS of the active DL BWP |
| DMRS precoder granularity | REG bundle size |
| REG bundle size | 6 |
| CP length | Normal |
| Mapping from REG to CCE | Distributed |

8.5.3.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the CSI-RS resource in set \bar{Q}_0 estimated over the last $T_{\text{Evaluate_BFD_CSI-RS}}$ ms period becomes worse than the threshold $Q_{\text{out_LR_CSI-RS}}$ within $T_{\text{Evaluate_BFD_CSI-RS}}$ ms period.

The value of $T_{\text{Evaluate_BFD_CSI-RS}}$ is defined in Table 8.5.3.2-1 for FR1.

The value of $T_{\text{Evaluate_BFD_CSI-RS}}$ is defined in Table 8.5.3.2-2 for FR2 with $N=1$. The requirements of $T_{\text{Evaluate_BFD_CSI-RS}}$ apply provided that the CSI-RS for BFD is not in a resource set configured with repetition ON. The requirements shall not apply when the CSI-RS resource in the active TCI state of CORESET is the same CSI-RS resource for BFD and the TCI state information of the CSI-RS resource is not given, wherein the TCI state information means QCL Type-D to SSB for L1-RSRP or CSI-RS with repetition ON.

For FR1,

- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS.
- $P = 1$ when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

For FR2,

- $P = 1$, when the BFD-RS resource is not overlapped with measurement gap and also not overlapped with SMTC occasion.
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{MGRP}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is not overlapped with SMTC occasion ($T_{\text{CSI-RS}} < MGRP$)
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when the BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$).
- $P = P_{\text{sharing factor}}$, when the BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$).
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{MGRP} - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and
- $T_{\text{SMTCperiod}} \neq MGRP$ or

- $T_{\text{SMTCperiod}} = \text{MGRP}$ and $T_{\text{CSI-RS}} < 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{CSI-RS}}}{\text{MGRP}}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and $T_{\text{SMTCperiod}} = \text{MGRP}$ and $T_{\text{CSI-RS}} = 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{\text{Min}(\text{MGRP}, T_{\text{SMTCperiod}})}}$, when the BFD-RS resource is partially overlapped with measurement gap ($T_{\text{CSI-RS}} < \text{MGRP}$) and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is partially or fully overlapped with measurement gap.
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{CSI-RS}}}{\text{MGRP}}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$) and SMTC occasion is partially overlapped with measurement gap ($T_{\text{SMTCperiod}} < \text{MGRP}$)
- $P_{\text{sharing factor}} = 1$, if the BFD-RS resource outside measurement gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, and;
 - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured,
- $P_{\text{sharing factor}} = 3$, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{\text{SMTCperiod}}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{\text{SMTCperiod}}$ corresponds to the value of higher layer parameter *smtc1*. $T_{\text{SMTCperiod}}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Note: The overlap between CSI-RS for BFD and SMTC means that CSI-RS for BFD is within the SMTC window duration.

Longer evaluation period would be expected if the combination of the BFD-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

The values of M_{BFD} used in Table 8.5.3.2-1 and Table 8.5.3.2-2 are defined as

- $M_{\text{BFD}} = 10$, if the CSI-RS resource(s) in set \bar{q}_0 used for BFD is transmitted with Density = 3.

Table 8.5.3.2-1: Evaluation period $T_{\text{Evaluate_BFD_CSI-RS}}$ for FR1

| Configuration | $T_{\text{Evaluate_BFD_CSI-RS}}$ (ms) |
|--|---|
| no DRX | $\text{Max}(50, M_{\text{BFD}} \times P \times T_{\text{CSI-RS}})$ |
| DRX cycle $\leq 320\text{ms}$ | $\text{Max}(50, 1.5 \times M_{\text{BFD}} \times P \times \text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}))$ |
| DRX cycle $> 320\text{ms}$ | $M_{\text{BFD}} \times P \times T_{\text{DRX}}$ |
| Note: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS resource in the set \bar{q}_0 . T_{DRX} is the DRX cycle length. | |

Table 8.5.3.2-2: Evaluation period $T_{\text{Evaluate_BFD_CSI-RS}}$ for FR2

| Configuration | $T_{\text{Evaluate_BFD_CSI-RS}}$ (ms) |
|--|--|
| no DRX | $\text{Max}(50, M_{\text{BFD}} \times P \times N \times T_{\text{CSI-RS}})$ |
| DRX cycle $\leq 320\text{ms}$ | $\text{Max}(50, 1.5 \times M_{\text{BFD}} \times P \times N \times \text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}))$ |
| DRX cycle $> 320\text{ms}$ | $M_{\text{BFD}} \times P \times N \times T_{\text{DRX}}$ |
| Note: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS resource in the set \bar{q}_0 . T_{DRX} is the DRX cycle length. | |

8.5.3.3 Measurement restrictions for CSI-RS beam failure detection

The UE is required to be capable of measuring CSI-RS for BFD without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following clauses.

For both FR1 and FR2, when the CSI-RS for BFD measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for BFD measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for BFD measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for BFD measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS measurement without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for BFD measurement and SSB. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for BFD measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for BFD measurement without any restriction.

For FR2, when the CSI-RS for BFD measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD or L1-RSRP measurement on the same CC or different CCs in the same band, or in the same symbol as SSB for CBD measurement on the same CC or different CCs in the same band when beam failure is detected, UE is required to measure one of but not both CSI-RS for BFD measurement and SSB. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS for BFD measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band,

- In the following cases, UE is required to measure one of but not both CSI-RS for BFD measurement and the other CSI-RS. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.
 - The CSI-RS for BFD measurement or the other CSI-RS in a resource set configured with repetition ON, or
 - The other CSI-RS is configured in set \bar{q}_1 and beam failure is detected, or
 - The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,
- Otherwise, UE shall be able to measure the CSI-RS for BFD measurement without any restriction.

8.5.4 Minimum requirement for L1 indication

When the radio link quality on all the RS resources in set \bar{q}_0 is worse than $Q_{\text{out_LR}}$, layer 1 of the UE shall send a beam failure instance indication to the higher layers. A layer 3 filter may be applied to the beam failure instance indications as specified in TS 38.331 [2].

The beam failure instance evaluation for the RS resources in set \bar{Q}_0 shall be performed as specified in clause 6 in TS 38.213 [3]. Two successive indications from layer 1 shall be separated by at least $T_{\text{Indication_interval_BFD}}$.

When DRX is not used, $T_{\text{Indication_interval_BFD}}$ is $\max(2\text{ms}, T_{\text{SSB-RS,M}})$ or $\max(2\text{ms}, T_{\text{CSI-RS,M}})$, where $T_{\text{SSB-RS,M}}$ and $T_{\text{CSI-RS,M}}$ is the shortest periodicity of all RS resources in set \bar{Q}_0 for the accessed cell, corresponding to either the shortest periodicity of the SSB in the set \bar{Q}_0 or CSI-RS resource in the set \bar{Q}_0 .

When DRX is used, for SSB based link quality measurement,

- $T_{\text{Indication_interval_BFD}} = \text{Max}(1.5 \times \text{DRX_cycle_length}, 1.5 \times T_{\text{SSB-RS,M}})$, if $\text{DRX_cycle_length} \leq 320\text{ms}$,
- $T_{\text{Indication_interval_BFD}} = \text{DRX_cycle_length}$, if $\text{DRX_cycle_length} > 320\text{ms}$.

When DRX is used, for CSI-RS based link quality measurement,

- $T_{\text{Indication_interval_BFD}} = \text{Max}(1.5 \times \text{DRX_cycle_length}, 1.5 \times T_{\text{CSI-RS,M}})$, if $\text{DRX_cycle_length} \leq 320\text{ms}$,
- $T_{\text{Indication_interval_BFD}} = \text{DRX_cycle_length}$, if $\text{DRX_cycle_length} > 320\text{ms}$.

8.5.5 Requirements for SSB based candidate beam detection

8.5.5.1 Introduction

The requirements in this clause apply for each SSB resource in the set \bar{q}_1 configured for a serving cell, provided that the SSBs configured for candidate beam detection are actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.5.5.2.

8.5.5.2 Minimum requirement

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured SSB resource in set \bar{q}_1 estimated over the last $T_{\text{Evaluate_CBD_SSB}}$ ms period becomes better than the threshold $Q_{\text{in_LR}}$ provided SSB_{RP} and SSB \hat{E}_s/I_{ot} are according to Annex Table B.2.4.1 for a corresponding band.

The UE shall monitor the configured SSB resources using the evaluation period in table 8.5.5.2-1 and 8.5.5.2-2 corresponding to the non-DRX mode, if the configured DRX cycle $\leq 320\text{ms}$.

The value of $T_{\text{Evaluate_CBD_SSB}}$ is defined in Table 8.5.5.2-1 for FR1.

The value of $T_{\text{Evaluate_CBD_SSB}}$ is defined in Table 8.5.5.2-2 for FR2 with scaling factor $N=8$.

where,

For FR1,

- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{MRGP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB,
- $P = 1$ when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

For FR2,

- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$).
- P is $P_{\text{sharing factor}}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC period ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$).

- $P = \frac{1}{1 - \frac{T_{SSB}}{MGRP} - \frac{T_{SSB}}{T_{SMTCperiod}}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and
 - $T_{SMTCperiod} \neq MGRP$ or
 - $T_{SMTCperiod} = MGRP$ and $T_{SSB} < 0.5 \times T_{SMTCperiod}$
- $P = \frac{P_{sharing\ factor}}{1 - \frac{T_{SSB}}{MGRP}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod} = MGRP$ and $T_{SSB} = 0.5 \times T_{SMTCperiod}$
- $P = \frac{1}{1 - \frac{T_{SSB}}{Min(MGRP, T_{SMTCperiod})}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap
- $P = \frac{P_{sharing\ factor}}{1 - \frac{T_{SSB}}{MGRP}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} < MGRP$)
- $P_{sharing\ factor} = 1$, if the candidate beam detection RS outside measurement gap is
 - not overlapped with the SSB symbols indicated by SSB-ToMeasure and 1 data symbol before each consecutive SSB symbols indicated by SSB-ToMeasure and 1 data symbol after each consecutive SSB symbols indicated by SSB-ToMeasure, given that SSB-ToMeasure is configured, and;
 - not overlapped with the RSSI symbols indicated by ss-RSSI-Measurement and 1 data symbol before each RSSI symbol indicated by ss-RSSI-Measurement and 1 data symbol after each RSSI symbol indicated by ss-RSSI-Measurement, given that ss-RSSI-Measurement is configured
- $P_{sharing\ factor} = 3$, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

Table 8.5.5.2-1: Evaluation period $T_{Evaluate_CBD_SSB}$ for FR1

| Configuration | $T_{Evaluate_CBD_SSB}$ (ms) |
|----------------------------------|---|
| non-DRX, DRX cycle ≤ 320 ms | $Max(25, Ceil(3 \times P) \times T_{SSB})$ |
| DRX cycle > 320 ms | $Ceil(3 \times P) \times T_{DRX}$ |
| Note: | T_{SSB} is the periodicity of SSB in the set \bar{q}_1 . T_{DRX} is the DRX cycle length. |

Table 8.5.5.2-2: Evaluation period $T_{Evaluate_CBD_SSB}$ for FR2

| Configuration | $T_{Evaluate_CBD_SSB}$ (ms) |
|----------------------------------|---|
| non-DRX, DRX cycle ≤ 320 ms | $Max(25, Ceil(3 \times P \times N) \times T_{SSB})$ |
| DRX cycle > 320 ms | $Ceil(3 \times P \times N) \times T_{DRX}$ |
| Note: | T_{SSB} is the periodicity of SSB in the set \bar{q}_1 . T_{DRX} is the DRX cycle length. |

8.5.5.3 Measurement restriction for SSB based candidate beam detection

For FR1, when the SSB for CBD measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for CBD measurement without any restrictions;
- If SSB and CSI-RS have different SCS-es,
 - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for CBD measurement without any restriction;
 - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for CBD measurement and CSI-RS. Longer measurement period for SSB based CBD measurement is expected, and no requirements are defined.

For FR2, when the SSB for CBD measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for CBD measurement and CSI-RS. Longer measurement period for SSB based CBD measurement is expected, and no requirements are defined.

8.5.6 Requirements for CSI-RS based candidate beam detection

8.5.6.1 Introduction

The requirements in this clause apply for each CSI-RS resource in the set \bar{q}_1 configured for a serving cell, provided that the CSI-RS resources configured for candidate beam detection are actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.5.6.2.

8.5.6.2 Minimum requirement

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured CSI-RS resource in set \bar{q}_1 estimated over the last $T_{\text{Evaluate_CBD_CSI-RS}}$ [ms] period becomes better than the threshold $Q_{\text{in_LR}}$ within $T_{\text{Evaluate_CBD_CSI-RS}}$ [ms] period provided CSI-RS \hat{E}_s/lot is according to Annex Table B.2.4.2 for a corresponding band.

The UE shall monitor the configured CSI-RS resources using the evaluation period in table 8.5.6.2-1 and 8.5.6.2-2 corresponding to the non-DRX mode, if the configured DRX cycle $\leq 320\text{ms}$.

The value of $T_{\text{Evaluate_CBD_CSI-RS}}$ is defined in Table 8.5.6.2-1 for FR1.

The value of $T_{\text{Evaluate_CBD_CSI-RS}}$ is defined in Table 8.5.6.2-2 for FR2 with scaling factor $N=8$.

For FR1,

- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{\text{MGRP}}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and
- $P = 1$ when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

For FR2,

- $P = 1$, when candidate beam detection RS is not overlapped with measurement gap and also not overlapped with SMTC occasion.
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{\text{MGRP}}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is not overlapped with SMTC occasion ($T_{\text{CSI-RS}} < \text{MGRP}$)

- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$).
- $P = P_{\text{sharing factor}}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$).
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{MGRP} - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and
 - $T_{\text{SMTCperiod}} \neq MGRP$ or
 - $T_{\text{SMTCperiod}} = MGRP$ and $T_{\text{CSI-RS}} < 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{CSI-RS}}}{MGRP}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and $T_{\text{SMTCperiod}} = MGRP$ and $T_{\text{CSI-RS}} = 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{\text{Min}(MGRP, T_{\text{SMTCperiod}})}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is partially or fully overlapped with measurement gap
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{CSI-RS}}}{MGRP}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$) and SMTC occasion is partially overlapped with measurement gap ($T_{\text{SMTCperiod}} < MGRP$)
- $P_{\text{sharing factor}} = 1$, if the candidate beam detection RS outside measurement gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, and;
 - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.
- $P_{\text{sharing factor}} = 3$, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{\text{SMTCperiod}}$ follows *smtc2*; Otherwise $T_{\text{SMTCperiod}}$ follows *smtc1*. $T_{\text{SMTCperiod}}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Note: The overlap between CSI-RS for CBD and SMTC means that CSI-RS for CBD is within the SMTC window duration.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

Longer evaluation period would be expected if the CSI-RS is on the same OFDM symbols with RLM, BFD, BM-RS, or other CBD-RS, according to the measurement restrictions defined in clause 8.5.6.3.

The values of M_{CBD} used in Table 8.5.6.2-1 and Table 8.5.6.2-2 are defined as

- $M_{\text{CBD}} = 3$, if the CSI-RS resource configured in the set \bar{q}_1 is transmitted with Density = 3.

Table 8.5.6.2-1: Evaluation period $T_{\text{Evaluate_CBD_CSI-RS}}$ for FR1

| Configuration | $T_{\text{Evaluate_CBD_CSI-RS}}$ (ms) |
|--|--|
| non-DRX, DRX cycle $\leq 320\text{ms}$ | $\text{Max}(25, \text{Ceil}(M_{\text{CBD}} \times P) \times T_{\text{CSI-RS}})$ |
| DRX cycle $> 320\text{ms}$ | $\text{Ceil}(M_{\text{CBD}} \times P) \times T_{\text{DRX}}$ |
| Note: | $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS resource in the set \bar{q}_1 . T_{DRX} is the DRX cycle length. |

Table 8.5.6.2-2: Evaluation period $T_{\text{Evaluate_CBD_CSI-RS}}$ for FR2

| Configuration | $T_{\text{Evaluate_CBD_CSI-RS}}$ (ms) |
|--|--|
| non-DRX, DRX cycle $\leq 320\text{ms}$ | $\text{Max}(25, \text{Ceil}(M_{\text{CBD}} \times P \times N) \times T_{\text{CSI-RS}})$ |
| DRX cycle $> 320\text{ms}$ | $\text{Ceil}(M_{\text{CBD}} \times P \times N) \times T_{\text{DRX}}$ |
| Note: | $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS resource in the set \bar{q}_1 . T_{DRX} is the DRX cycle length. |

8.5.6.3 Measurement restriction for CSI-RS based candidate beam detection

For both FR1 and FR2, when the CSI-RS for CBD measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for CBD measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for CBD measurement, the UE shall be able to perform CSI-RS based CBD measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for CBD measurement, the UE shall be able to perform CSI-RS based CBD measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS based CBD measurement for without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for CBD measurement and SSB. Longer measurement period for CSI-RS based CBD measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for CBD measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for CBD measurement without any restriction.

For FR2, when the CSI-RS for CBD measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both CSI-RS for CBD measurement and SSB. Longer evaluation period for CSI-RS based CBD measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS for CBD measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both CSI-RS for CBD measurement and the other CSI-RS. Longer evaluation period for CSI-RS based CBD measurement is expected, and no requirements are defined.

8.5.7 Scheduling availability of UE during beam failure detection

Scheduling availability restrictions when the UE is performing beam failure detection are described in the following clauses.

8.5.7.1 Scheduling availability of UE performing beam failure detection with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to beam failure detection performed on SSB and CSI-RS configured for BFD with the same SCS as PDSCH or PDCCH in FR1.

8.5.7.2 Scheduling availability of UE performing beam failure detection with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to beam failure detection when SSB is configured as BFD. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to beam failure detection when SSB is configured as BFD.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for beam failure detection.

When intra-band carrier aggregation in FR1 is configured, the scheduling restrictions on FR1 serving PCell or PSCell apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols. When inter-band carrier aggregation within FR1 is configured, there are no scheduling restrictions on FR1 serving cell(s) configured in other bands than the bands in which PCell or PSCell is configured.

8.5.7.3 Scheduling availability of UE performing beam failure detection on FR2

The following scheduling restriction applies due to beam failure detection.

- For the case where no RSs are provided for BFD, or when CSI-RS is configured for BFD is explicitly configured and is type-D QCLed with active TCI state for PDCCH or PDSCH, and the CSI-RS is not in a CSI-RS resource set with repetition ON
 - There are no scheduling restrictions due to beam failure detection performed based on the CSI-RS.
- Otherwise
 - The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on BFD-RS resource symbols to be measured for beam failure detection.

When intra-band carrier aggregation in FR2 is performed, the scheduling restrictions on FR2 serving PCell or PSCell apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for BFD measurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for BFD measurement.

8.5.7.4 Scheduling availability of UE performing beam failure detection on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR DC

There are no scheduling restrictions on FR1 serving cell(s) due to beam failure detection performed on FR2 serving PCell and/or PSCell.

There are no scheduling restrictions on FR2 serving cell(s) due to beam failure detection performed on FR1 serving PCell and/or PSCell.

NR-DC in Rel-15 only includes the scenarios where all serving cells in MCG are in FR1 and all serving cells in SCG are in FR2.

8.5.8 Scheduling availability of UE during candidate beam detection

Scheduling availability restrictions when the UE is performing L1-RSRP measurement for candidate beam detection are described in the following clauses.

8.5.8.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to L1-RSRP measurement performed on SSB and CSI-RS configured as link recovery detection resource with the same SCS as PDSCH or PDCCH in FR1.

8.5.8.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-RSRP measurement based on SSB as link recovery detection resource. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-RSRP measurement based on SSB configured as link recovery detection resource.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH, TRS, CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for L1-RSRP.

When intra-band carrier aggregation in FR1 is configured, the scheduling restrictions on one serving cell apply to all other serving cells in the same band on the symbols that fully or partially overlap with the restricted symbols. When inter-band carrier aggregation within FR1 is configured, there are no scheduling restrictions on FR1 serving cell(s) configured in other bands.

8.5.8.3 Scheduling availability of UE performing L1-RSRP measurement on FR2

The following scheduling restriction applies due to candidate beam detection

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH, CSI-RS for tracking or CSI-RS for CQI on reference symbols to be measured for candidate beam detection.

When intra-band carrier aggregation in FR2 is configured, the scheduling restrictions on to one serving cell apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for CBD measurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for CBD measurement.

8.5.8.4 Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR-DC

There are no scheduling restrictions on FR1 serving cell(s) due to L1-RSRP measurement performed on FR2 serving cell(s).

There are no scheduling restrictions on FR2 serving cell(s) due to L1-RSRP measurement performed on FR1 serving cell(s).

NR-DC in Rel-15 only includes the scenarios where all serving cells in MCG are in FR1 and all serving cells in SCG are in FR2.

8.6 Active BWP switch delay

8.6.1 Introduction

The requirements in this clause apply for a UE configured with more than one BWP on PCell or any activated SCell in standalone NR or NE-DC, PCell, PSCell or any activated SCell in MCG or SCG in NR-DC, or PSCell or any activated SCell in SCG in EN-DC. UE shall complete the switch of active DL and/or UL BWP within the delay defined in this clause.

8.6.2 DCI and timer based BWP switch delay

The requirements in this clause only apply to the case that the BWP switch is performed on a single CC.

For DCI-based BWP switch, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{\text{BWPswitchDelay}}$ which starts from the beginning of DL slot n .

The UE is not required to transmit UL signals or receive DL signals until the first DL or UL slot occurs right after a time duration of $T_{\text{BWPswitchDelay}}$ which starts from the beginning of DL slot n except DCI triggering BWP switch on the cell where DCI-based BWP switch occurs. The UE is not required to follow the requirements defined in this clause when performing a DCI-based BWP switch between the BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths.

For timer-based BWP switch, the UE shall start BWP switch at DL slot n , where slot n is the first slot of a DL subframe (FR1) or DL half-subframe (FR2) immediately after a BWP-inactivity timer *bwp-InactivityTimer* [2] expires on a serving cell, and the UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{\text{BWPswitchDelay}}$ which starts from the beginning of DL slot n .

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{\text{BWPswitchDelay}}$ after *bwp-InactivityTimer* [2] expires on the cell where timer-based BWP switch occurs.

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{\text{BWPswitchDelay}}$ defined in Table 8.6.2-1.

Table 8.6.2-1: BWP switch delay

| μ | NR Slot length (ms) | BWP switch delay $T_{BWPswitchDelay}$ (slots) | |
|--|---------------------|---|--------------------------|
| | | Type 1 ^{Note 1} | Type 2 ^{Note 1} |
| 0 | 1 | 1 | 3 |
| 1 | 0.5 | 2 | 5 |
| 2 | 0.25 | 3 | 9 |
| 3 | 0.125 | 6 | 18 |
| Note 1: Depends on UE capability. Note 2: If the BWP switch involves changing of SCS, the BWP switch delay is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch. | | | |

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in Clause 8.10 in the new BWP.
- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in Clause 8.10 in the new BWP

8.6.3 RRC based BWP switch delay

For RRC-based BWP switch, after the UE receives RRC reconfiguration involving active BWP switching or parameter change of its active BWP, UE shall be able to receive PDSCH/PDCCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch occurs on the first DL or UL slot right after a time duration of $\frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{NR\ Slot\ length}$ slots which begins from the beginning of DL slot n, where

DL slot n is the last slot containing the RRC command, and

$T_{RRCprocessingDelay}$ is the length of the RRC procedure delay in ms as defined in clause 12 in TS 38.331 [2], and

$T_{BWPswitchDelayRRC} = 6ms$ is the time used by the UE to perform BWP switch.

The UE is not required to transmit UL signals or receive DL signals during the time defined by $T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$ on the cell where RRC-based BWP switch occurs.

8.7 Void

8.8 NE-DC: E-UTRAN PSCell Addition and Release Delay

8.8.1 Introduction

This clause defines requirements for the delay within which the UE shall be able to configure an E-UTRAN PSCell in NR - E-UTRA dual connectivity. The requirements are applicable to an NR - E-UTRA dual connectivity capable UE.

8.8.2 E-UTRAN PSCell Addition Delay Requirement

The requirements in this clause shall apply for the UE, which is configured with PCell, and may also be configured with one or more SCells.

Upon receiving E-UTRAN PSCell addition in subframe n , the UE shall be capable to transmit PRACH preamble towards E-UTRAN PSCell no later than in subframe $n + T_{\text{config_E-UTRAN-PSCell}}$:

Where:

$$T_{\text{config_E-UTRAN-PSCell}} = 20\text{ms} + T_{\text{activation_time}} + 50\text{ms} + T_{\text{PCell_DU}} + T_{\text{E-UTRAN-PSCell_DU}}$$

$T_{\text{activation_time}}$ is the E-UTRAN PSCell activation delay. If the E-UTRAN PSCell is known, then $T_{\text{activation_time}}$ is 20ms. If the E-UTRAN PSCell is unknown, then $T_{\text{activation_time}}$ is 30ms provided the E-UTRAN PSCell can be successfully detected on the first attempt.

$T_{\text{PCell_DU}}$ is the delay uncertainty due to PCell PRACH preamble transmission. $T_{\text{PCell_DU}}$ is up to 20ms if E-UTRAN PSCell activation is interrupted by a PCell PRACH preamble transmission, otherwise it is 0.

$T_{\text{E-UTRAN-PSCell_DU}}$ is the delay uncertainty in acquiring the first available PRACH occasion in the E-UTRAN PSCell. $T_{\text{E-UTRAN-PSCell_DU}}$ is up to 30ms.

E-UTRAN PSCell is known if it has been meeting the following conditions:

During the last 5 seconds before the reception of the E-UTRAN PSCell configuration command:

- the UE has sent a valid measurement report for the E-UTRAN PSCell being configured and
- the E-UTRAN PSCell being configured remains detectable according to the cell identification conditions specified in clause 8.8 of TS 36.133 [15],
- E-UTRAN PSCell being configured also remains detectable during the E-UTRAN PSCell configuration delay $T_{\text{config_E-UTRAN-PSCell}}$ according to the cell identification conditions specified in clause 8.8 of TS 36.133 [15].

otherwise it is unknown.

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [2].

8.8.3 E-UTRAN PSCell Release Delay Requirement

The requirements in this clause shall apply for a UE which is configured with PCell and E-UTRAN PSCell and may also be configured with one or more SCells and/or E-UTRAN SCells.

Upon receiving E-UTRAN PSCell release in subframe n , the UE shall accomplish the release actions specified in TS 38.331 [2] no later than in subframe $n+20$.

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [2].

8.9 NR-DC: PSCell Addition and Release Delay

8.9.1 Introduction

This clause defines requirements for the delay within which the UE shall be able to configure an PSCell in NR dual connectivity. The requirements are applicable to an NR dual connectivity capable UE.

8.9.2 PSCell Addition Delay Requirement

The requirements in this clause shall apply for the UE configured with only PCell in FR1.

Upon receiving PSCell addition in subframe n , the UE shall be capable to transmit PRACH preamble towards PSCell in FR2 no later than in subframe $n + T_{\text{config_PSCell}}$.

where:

$$T_{\text{config_PSCell}} = T_{\text{RRC_delay}} + T_{\text{processing}} + T_{\text{search}} + T_{\Delta} + T_{\text{PSCell_DU}} + 2 \text{ ms}$$

$T_{\text{RRC_delay}}$ is the RRC procedure delay as specified in TS 38.331 [2].

$T_{\text{processing}}$ is the SW processing time needed by UE, including RF warm up period. $T_{\text{processing}} = 40$ ms.

T_{search} is the time for AGC settling and PSS/SSS detection. If the target cell is known, $T_{\text{search}} = 0$ ms. If the target cell is unknown and the target cell $\hat{E}_s/I_{ot} \geq -2$ dB, $T_{\text{search}} = 24 * T_{\text{rs}}$ ms.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = 1 * T_{\text{rs}}$ ms for a known or unknown PSCell.

$T_{\text{PSCell_DU}}$ is the delay uncertainty in acquiring the first available PRACH occasion in the PSCell. $T_{\text{PSCell_DU}}$ is up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in Table 8.1-1 of TS 38.213 [3].

T_{rs} is the SMTC periodicity of the target cell if the UE has been provided with an SMTC configuration for the target cell in PSCell addition message, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with $T_{\text{rs}} = 5$ ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5 ms.

In FR1 and FR2, the PSCell is known if it has been meeting the following conditions:

During the last 5 seconds before the reception of the PSCell configuration command:

- the UE has sent a valid measurement report for the PSCell being configured and
- One of the SSBs measured from the PSCell being configured remains detectable according to the cell identification conditions specified in clause 9.3.
- One of the SSBs measured from PSCell being configured also remains detectable during the PSCell configuration delay $T_{\text{config_PSCell}}$ according to the cell identification conditions specified in clause 9.3.

otherwise it is unknown.

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [2].

8.9.3 PSCell Release Delay Requirement

The requirements in this clause shall apply for a UE which is configured with PCell and one PSCell.

Upon receiving PSCell release in subframe n , the UE shall accomplish the release actions specified in TS 38.331 [2] no later than in subframe $n + T_{\text{RRC_delay}}$:

where

$T_{\text{RRC_delay}}$ is the RRC procedure delay as specified in TS 38.331 [2].

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [2].

8.10 Active TCI state switching delay

8.10.1 Introduction

The requirements in this clause apply for a UE configured with one or more TCI state configurations on serving cell in MR-DC or standalone NR. UE shall complete the switch of active TCI state within the delay defined in this clause.

8.10.2 Known conditions for TCI state

The TCI state is known if the following conditions are met:

- During the period from the last transmission of the RS resource used for the L1-RSRP measurement reporting for the target TCI state to the completion of active TCI state switch, where the RS resource for L1-RSRP measurement is the RS in target TCI state or QCLed to the target TCI state

- TCI state switch command is received within 1280 ms upon the last transmission of the RS resource for beam reporting or measurement
- The UE has sent at least 1 L1-RSRP report for the target TCI state before the TCI state switch command
- The TCI state remain detectable during the TCI state switching period
- The SSB associated with the TCI state remain detectable during the TCI switching period
 - SNR of the TCI state $\geq -3\text{dB}$

Otherwise, the TCI state is unknown.

8.10.3 MAC-CE based TCI state switch delay

If the target TCI state is known, upon receiving PDSCH carrying MAC-CE activation command in slot n , UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + T_{\text{O}_k} * (T_{\text{first-SSB}} + T_{\text{SSB-proc}}) / NR \text{ slot length}$. The UE shall be able to receive PDCCH with the old TCI state until slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu}$.

Where T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3];

$T_{\text{first-SSB}}$ is time to first SSB transmission after MAC CE command is decoded by the UE;

$T_{\text{SSB-proc}} = 2 \text{ ms}$;

$T_{\text{O}_k} = 1$ if target TCI state is not in the active TCI state list for PDSCH, 0 otherwise.

If the target TCI state is unknown, upon receiving PDSCH carrying MAC-CE activation command in slot n , UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + T_{\text{L1-RSRP}} + T_{\text{O}_{\text{uk}}} * (T_{\text{first-SSB}} + T_{\text{SSB-proc}}) / NR \text{ slot length}$. The UE shall be able to receive PDCCH with the old TCI state until slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu}$.

Where $T_{\text{L1-RSRP}}$ is the time for L1-RSRP measurement for Rx beam refinement, defined as

- $T_{\text{L1-RSRP_Measurement_Period_SSB}}$ for SSB as specified in clause 9.5.4.1,
 - with the assumption of $M=1$
 - with $T_{\text{Report}} = 0$
- $T_{\text{L1-RSRP_Measurement_Period_CSI-RS}}$ for CSI-RS as specified in clause 9.5.4.2
 - configured with higher layer parameter *repetition* set to ON
 - with the assumption of $M=1$ for periodic CSI-RS
 - for aperiodic CSI-RS if number of resources in resource set at least equal to *MaxNumberRxBeam*
 - with $T_{\text{Report}} = 0$
- $T_{\text{O}_{\text{uk}}} = 1$ for CSI-RS based L1-RSRP measurement, and 0 for SSB based L1-RSRP measurement when TCI state switching involves QCL-TypeD
- $T_{\text{O}_{\text{uk}}} = 1$ when TCI state switching involves other QCL types only

$T_{\text{L1-RSRP_Measurement_Period_SSB}} = 0$ for SSB in FR2 and $T_{\text{L1-RSRP_Measurement_Period_CSI-RS}} = 0$ for CSI-RS in FR2, provided that the TCI state switching involves QCL-TypeA, QCL-TypeB or QCL-TypeC only.

- $T_{\text{first-SSB}}$ is time to first SSB transmission after L1-RSRP measurement when TCI state switching involves QCL-TypeD;
- $T_{\text{first-SSB}}$ is time to first SSB transmission after MAC CE command is decoded by the UE for other QCL types;
 - The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state

8.10.4 DCI based TCI state switch delay

If the target TCI state is known, when a UE is configured with the higher layer parameter *tcI-PresentInDCI* which is set as 'enabled' for the CORESET scheduling PDSCH at slot n , UE shall be able to receive PDSCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + \text{timeDurationForQCL}$, where, *timeDurationForQCL* is the time required by the UE to perform PDCCH reception and applying spatial QCL information received in DCI for PDSCH processing as described in TS 38.214 [26], the value of *timeDurationForQCL* is defined in TS 38.331 [2].

The known condition for TCI state defined in clause 8.10.2 is applied.

8.10.5 RRC based TCI state switch delay

If the target TCI state is known, upon receiving PDSCH carrying RRC activation command at slot n , UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + (T_{\text{RRC_processing}} + T_{\text{O}_k} * (T_{\text{first-SSB}} + T_{\text{SSB-proc}})) / \text{NR slot length}$, where $T_{\text{RRC_processing}}$ is the RRC processing delay, $T_{\text{first-SSB}}$, $T_{\text{SSB-proc}}$ and T_{O_k} are defined in clause 8.10.3. The UE is not required to receive PDCCH/PDSCH/CSI-RS or transmit PUCCH/PUSCH until the end of switching period.

- $T_{\text{first-SSB}}$ is time to first SSB transmission after RRC processing by the UE; The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state

If the target TCI state is unknown, upon receiving PDSCH carrying RRC activation command at slot n , UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + (T_{\text{RRC_processing}} + T_{\text{L1-RSRP}} + T_{\text{O}_k} * (T_{\text{first-SSB}} + T_{\text{SSB-proc}})) / \text{NR slot length}$, where $T_{\text{RRC_processing}}$ is the RRC processing delay, and T_{O_k} , $T_{\text{L1-RSRP}}$ are defined in clause 8.10.3. The UE is not required to receive PDCCH/PDSCH/CSI-RS or transmit PUCCH/PUSCH until the end of switching period.

- $T_{\text{first-SSB}}$ is time to first SSB transmission after L1-RSRP measurement when TCI state switching involves QCL-TypeD;
- $T_{\text{first-SSB}}$ is time to first SSB transmission after RRC processing time at the UE for other QCL types;
- The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state

The requirements for RRC based TCI state switch delay apply when only 1 TCI state is configured in RRC TCI state list.

8.10.6 Active TCI state list update delay

If the target TCI state is known, upon receiving PDSCH carrying MAC-CE active TCI state list update at slot n , UE shall be able to receive PDCCH to schedule PDSCH with the new target TCI state at the first slot that is after $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe}, \mu} + T_{\text{O}_k} * (T_{\text{first-SSB}} + T_{\text{SSB-proc}}) / \text{NR slot length}$. Where T_{HARQ} , $T_{\text{first-SSB}}$, $T_{\text{SSB-proc}}$ and T_{O_k} are defined in clause 8.10.3.

8.11 PSCell Change

This clause defines requirements for the delay within which the UE shall be able to change PSCell to other SCell in EN-DC or NR-DC. The requirements in this clause are applicable to EN-DC and NR-DC.

Upon receiving PSCell change in subframe n , the UE shall be capable of transmitting PRACH preamble towards the target PSCell no later than specified in clause 8.9.2, where the following value for $T_{\text{processing}}$ shall override the existing one:

- $T_{\text{processing}} = 20$ ms when source and target cells are in the same FR,
- $T_{\text{processing}} = 40$ ms when source and target cells are in different FRs.

The target PSCell is known if it has been meeting the conditions in clause 8.9.2.

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [2].

9 Measurement Procedure

9.1 General measurement requirement

9.1.1 Introduction

This clause contains general requirements on the UE regarding measurement reporting in RRC_CONNECTED state. The requirements are split in intra-frequency, inter-frequency, inter-RAT E-UTRAN FDD, inter-RAT E-UTRAN TDD, and L1-RSRP measurements requirements. These measurements may be used by the NG-RAN. The measurement quantities are defined in TS38.215 [4], the measurement model is defined in TS38.300 [10], TS37.340 [17] and measurement accuracies are specified in clause 10. Control of measurement reporting is specified in TS 38.331 [2].

In the requirements of clause 9, the exceptions for side conditions apply as follows:

- for the UE capable of CA but not configured with any SCell, the applicable exceptions for side conditions are specified in Annex B, clause B.3.2.1 for UE supporting CA in FR1, and clause B.3.2.3 for UE supporting CA in FR2, respectively;
- for the UE capable of CA and configured with at least one SCell, the applicable exceptions for side conditions are specified in Annex B, clause B.3.2.2 for UE configured with CA in FR1, and clause B.3.2.4 for UE supporting CA in FR2, respectively;
- for the UE capable of SUL but not configured with SUL, the applicable exceptions for side conditions are specified in Annex B, clause B.3.4.1 for UE supporting SUL in FR1;
- for the UE capable of SUL and configured with at least one SUL, the applicable exceptions for side conditions are specified in Annex B, clause B.3.4.2 for UE configured with SUL in FR1.

9.1.2 Measurement gap

If the UE requires measurement gaps to identify and measure intra-frequency cells and/or inter-frequency cells and/or inter-RAT E-UTRAN cells, and the UE does not support independent measurement gap patterns for different frequency ranges as specified in Table 5.1-1 in [18, 19, 20], in order for the requirements in the following clauses to apply the network must provide a single per-UE measurement gap pattern for concurrent monitoring of all frequency layers.

If the UE requires measurement gaps to identify and measure intra-frequency cells and/or inter-frequency cells and/or inter-RAT E-UTRAN cells, and the UE supports independent measurement gap patterns for different frequency ranges as specified in Table 5.1-1 in [18, 19, 20], in order for the requirements in the following clauses to apply the network must provide either per-FR measurement gap patterns for frequency range where UE requires per-FR measurement gap for concurrent monitoring of all frequency layers of each frequency range independently, or a single per-UE measurement gap pattern for concurrent monitoring of all frequency layers of all frequency ranges.

During the per-UE measurement gaps the UE:

- is not required to conduct reception/transmission from/to the corresponding E-UTRAN PCell, E-UTRAN SCell(s) and NR serving cells for E-UTRA-NR dual connectivity except the reception of signals used for RRM measurement(s) and the signals used for random access procedure according to TS38.321 [7].
- is not required to conduct reception/transmission from/to the corresponding NR serving cells for SA (with single carrier or CA configured) except the reception of signals used for RRM measurement(s) and the signals used for random access procedure according to TS38.321 [7].
- is not required to conduct reception/transmission from/to the corresponding PCell, SCell(s) and E-UTRAN serving cells for NR-E-UTRA dual connectivity except the reception of signals used for RRM measurement(s) and the signals used for random access procedure according to TS38.321 [7].

- is not required to conduct reception/transmission from/to the corresponding NR serving cells for NR-DC except the reception of signals used for RRM measurement(s) and the signals used for random access procedure according to TS38.321 [7].

During the per-FR measurement gaps the UE:

- is not required to conduct reception/transmission from/to the corresponding E-UTRAN PCell, E-UTRAN SCell(s) and NR serving cells in the corresponding frequency range for E-UTRA-NR dual connectivity except the reception of signals used for RRM measurement(s) and the signals used for random access procedure according to [7].
- is not required to conduct reception/transmission from/to the corresponding NR serving cells in the corresponding frequency range for SA (with single carrier or CA configured) except the reception of signals used for RRM measurement(s) and the signals used for random access procedure according to TS38.321 [7].
- is not required to conduct reception/transmission from/to the corresponding PCell, SCell(s) and E-UTRAN serving cells in the corresponding frequency range for NR-E-UTRA dual connectivity except the reception of signals used for RRM measurement(s) and the signals used for random access procedure according to TS38.321 [7].
- is not required to conduct reception/transmission from/to the corresponding NR serving cells in the corresponding frequency range for NR-DC except the reception of signals used for RRM measurement(s) and the signals used for random access procedure according to TS38.321 [7].

UEs shall support the measurement gap patterns listed in Table 9.1.2-1 based on the applicability specified in table 9.1.2-2 and 9.1.2-3. UE determines measurement gap timing based on gap offset configuration and measurement gap timing advance configuration provided by higher layer signalling as specified in TS 38.331 [2] and TS 36.331 [16].

Table 9.1.2-1: Gap Pattern Configurations

| Gap Pattern Id | Measurement Gap Length (MGL, ms) | Measurement Gap Repetition Period (MGRP, ms) |
|----------------|----------------------------------|--|
| 0 | 6 | 40 |
| 1 | 6 | 80 |
| 2 | 3 | 40 |
| 3 | 3 | 80 |
| 4 | 6 | 20 |
| 5 | 6 | 160 |
| 6 | 4 | 20 |
| 7 | 4 | 40 |
| 8 | 4 | 80 |
| 9 | 4 | 160 |
| 10 | 3 | 20 |
| 11 | 3 | 160 |
| 12 | 5.5 | 20 |
| 13 | 5.5 | 40 |
| 14 | 5.5 | 80 |
| 15 | 5.5 | 160 |
| 16 | 3.5 | 20 |
| 17 | 3.5 | 40 |
| 18 | 3.5 | 80 |
| 19 | 3.5 | 160 |
| 20 | 1.5 | 20 |
| 21 | 1.5 | 40 |
| 22 | 1.5 | 80 |
| 23 | 1.5 | 160 |

Table 9.1.2-2: Applicability for Gap Pattern Configurations supported by the E-UTRA-NR dual connectivity UE or NR-E-UTRA dual connectivity UE

| Measurement gap pattern configuration | Serving cell | Measurement Purpose | Applicable Gap Pattern Id |
|---------------------------------------|--|--|---------------------------|
| Per-UE measurement gap | E-UTRA + FR1, or E-UTRA + FR2, or E-UTRA + FR1 + FR2 | non-NR RAT ^{Note1,2} FR1 and/or FR2 | 0,1,2,3 0-11 |
| | | non-NR RAT ^{Note1,2} and FR1 and/or FR2 | 0, 1, 2, 3, 4, 6, 7, 8,10 |
| | | | |
| Per-FR measurement gap | E-UTRA and, FR1 if configured | non-NR RAT ^{Note1,2} | 0,1,2,3 |
| | FR2 if configured | | No gap |
| | E-UTRA and, FR1 if configured | FR1 only | 0-11 |
| | FR2 if configured | | No gap |
| | E-UTRA and, FR1 if configured | FR2 only | No gap |
| | FR2 if configured | | 12-23 |
| | E-UTRA and, FR1 if configured | non-NR RAT ^{Note1,2} and FR1 | 0, 1, 2, 3, 4, 6, 7, 8,10 |
| | FR2 if configured | | No gap |
| | E-UTRA and, FR1 if configured | FR1 and FR2 | 0-11 |
| | FR2 if configured | | 12-23 |
| | E-UTRA and, FR1 if configured | non-NR RAT ^{Note1,2} and FR2 | 0, 1, 2, 3, 4, 6, 7, 8,10 |
| | FR2 if configured | | 12-23 |
| | E-UTRA and, FR1 if configured | non-NR RAT ^{Note1,2} and FR1 and FR2 | 0, 1, 2, 3, 4, 6, 7, 8,10 |
| | FR2 if configured | | 12-23 |
| Note: | In E-UTRA-NR dual connectivity mode, if GSM or UTRA TDD or UTRA FDD inter-RAT frequency layer is configured to be monitored, only measurement gap pattern #0 and #1 can be used for per-FR gap in E-UTRA and FR1 if configured, or for per-UE gap. | | |
| NOTE 1: | In E-UTRA-NR dual connectivity mode, non-NR RAT includes E-UTRA, UTRA and/or GSM. In NR-E-UTRA dual connectivity mode, non-NR RAT means E-UTRA. | | |
| NOTE 2: | Void | | |
| NOTE 3: | When E-UTRA inter-frequency RSTD measurements are configured and the UE requires measurement gaps for performing such measurements, only Gap Pattern #0 can be used. | | |

In E-UTRA-NR dual connectivity mode,

- if per-UE measurement gap is configured with MG timing advance of T_{MG} ms, the measurement gap starts at time T_{MG} ms advanced to the end of the latest E-UTRA subframe occurring immediately before the configured measurement gap among MCG serving cells subframes.
- if per-FR measurement gap for FR1 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR1 starts at time T_{MG} ms advanced to the end of the latest E-UTRA subframe occurring immediately before the configured measurement gap among MCG serving cells subframes.
- if per-FR measurement gap for FR2 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR2 starts at time T_{MG} ms advanced to the end of the latest NR subframe occurring immediately before the configured measurement gap among SCG serving cells subframes in FR2.

In NR-E-UTRA dual connectivity mode,

- if per-UE measurement gap is configured with MG timing advance of T_{MG} ms, the measurement gap starts at time T_{MG} ms advanced to the end of the latest NR subframe occurring immediately before the configured measurement gap among MCG serving cells subframes.
- if per-FR measurement gap for FR1 is configured with MG timing advance of T_{MG} ms and UE has NR serving cell in FR1, the measurement gap for FR1 starts at time T_{MG} ms advanced to the end of the latest NR subframe occurring immediately before the configured measurement gap among MCG serving cells subframes in FR1.

- if per-FR measurement gap for FR1 is configured with MG timing advance of T_{MG} ms and UE doesn't have NR serving cell in FR1, the measurement gap for FR1 starts at time T_{MG} ms advanced to the end of the latest E-UTRA subframe occurring immediately before the configured measurement gap among SCG serving cells subframes.
- if per-FR measurement gap for FR2 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR2 starts at time T_{MG} ms advanced to the end of the latest NR subframe occurring immediately before the configured measurement gap among MCG serving cells subframes in FR2.

In NR-NR dual connectivity mode,

- If per-UE measurement gap is configured with MG timing advance of T_{MG} ms, the measurement gap starts at time T_{MG} ms advanced to the end of the latest MCG subframe occurring immediately before the configured measurement gap among MCG serving cells subframes.
- If per-FR measurement gap for FR1 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR1 starts at time T_{MG} ms advanced to the end of the latest MCG subframe occurring immediately before the configured measurement gap among MCG serving cells subframes.
- If per-FR measurement gap for FR2 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR2 starts at time T_{MG} ms advanced to the end of the latest SCG subframe occurring immediately before the configured measurement gap among SCG serving cells subframes in FR2.

T_{MG} is the MG timing advance value provided in *mgta* according to TS38.331 [2].

In determining the measurement gap starting point, UE shall use the DL timing of the latest E-UTRA or NR subframe occurring immediately before the configured measurement gap among E-UTRA or NR serving cells.

NR-DC in Rel-15 only includes the scenarios where all serving cells in MCG in FR1 and all serving cells in SCG in FR2.

For per-FR measurement gap capable UE configured with E-UTRA-NR dual connectivity or NR-E-UTRA dual connectivity, when serving cells are in E-UTRA and FR1, measurement objects are in both E-UTRA/FR1 and FR2,

- If MN indicates UE that the measurement gap from MN applies to E-UTRA/FR1/FR2 serving cells, UE fulfils the per-UE measurement requirements for both E-UTRA/FR1 and FR2 measurement objects based on the measurement gap pattern configured by MN;
- If MN indicates UE that the measurement gap from MN applies to only LTE/FR1 serving cell(s),
 - UE fulfils the measurement requirements for FR1/LTE measurement objects based on the configured measurement gap pattern;
 - UE fulfils the requirements for FR2 measurement objects based on effective MGRP=20ms;

For per-FR measurement gap capable configured with E-UTRA-NR dual connectivity, NR-E-UTRA dual connectivity or NR-NR dual connectivity, when serving cells are in E-UTRA, FR1 and FR2, or in E-UTRA and FR2, or in FR1 and FR2, measurement objects are in both E-UTRA /FR1 and FR2,

- If MN indicates UE that the measurement gap from MN applies to E-UTRA/FR1/FR2 serving cells, UE fulfils the per-UE measurement requirements for both E-UTRA/FR1 and FR2 measurement objects based on the measurement gap pattern configured by MN.

Table 9.1.2-3: Applicability for Gap Pattern Configurations supported by the UE with NR standalone operation (with single carrier, NR CA and NR-DC configuration)

| Measurement gap pattern configuration | Serving cell | Measurement Purpose ^{NOTE 2} | Applicable Gap Pattern Id |
|---------------------------------------|--|--|---------------------------|
| Per-UE measurement gap | FR1 ^{NOTE5} , or FR1 + FR2 | E-UTRA only ^{NOTE3} | 0,1,2,3 |
| | | FR1 and/or FR2 | 0-11 |
| | | E-UTRAN and FR1 and/or FR2 ^{NOTE3} | 0, 1, 2, 3, 4, 6, 7, 8,10 |
| | FR2 ^{NOTE5} | E-UTRA only ^{NOTE3} | 0,1,2,3 |
| | | FR1 only | 0-11 |

| | | | |
|------------------------|-------------------|--|---------------------------|
| | | FR1 and FR2 | 0-11 |
| | | E-UTRAN and FR1 and/or FR2 <small>NOTE3</small> | 0, 1, 2, 3, 4, 6, 7, 8,10 |
| | | FR2 only | 12-23 |
| Per-FR measurement gap | FR1 if configured | E-UTRA only <small>NOTE3</small> | 0,1,2,3 |
| | FR2 if configured | | No gap |
| | FR1 if configured | FR1 only | 0-11 |
| | FR2 if configured | | No gap |
| | FR1 if configured | FR2 only | No gap |
| | FR2 if configured | | 12-23 |
| | FR1 if configured | E-UTRA and FR1 <small>NOTE3</small> | 0, 1, 2, 3, 4, 6, 7, 8,10 |
| | FR2 if configured | | No gap |
| | FR1 if configured | FR1 and FR2 | 0-11 |
| | FR2 if configured | | 12-23 |
| | FR1 if configured | E-UTRA and FR2 <small>NOTE3</small> | 0, 1, 2, 3, 4, 6, 7, 8,10 |
| | FR2 if configured | | 12-23 |
| | FR1 if configured | E-UTRA and FR1 and FR2 <small>NOTE3</small> | 0, 1, 2, 3, 4, 6, 7, 8,10 |
| | FR2 if configured | | 12-23 |

NOTE 1: When E-UTRA inter-RAT RSTD measurements are configured and the UE requires measurement gaps for performing such measurements, only Gap Pattern #0 can be used.
 NOTE 2: Measurement purpose which includes E-UTRA measurements includes also inter-RAT E-UTRA RSRP and RSRQ measurements for E-CID
 NOTE 3: Void
 NOTE4: If per-UE measurement gap is configured with MG timing advance of T_{MG} ms, the measurement gap starts at time T_{MG} ms advanced to the end of the latest subframe occurring immediately before the configured measurement gap among all serving cells subframes. If per-FR measurement gap for FR1 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR1 starts at time T_{MG} ms advanced to the end of the latest subframe occurring immediately before the configured measurement gap among serving cells subframes in FR1. If per-FR measurement gap for FR2 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR2 starts at time T_{MG} ms advanced to the end of the latest subframe occurring immediately before the configured measurement gap among serving cells subframes in FR2. T_{MG} is the MG timing advance value provided in *mgta* according to [2]. In determining the measurement gap starting point, UE shall use the DL timing of the latest subframe occurring immediately before the configured measurement gap among serving cells.
 NOTE 5: NR-DC in Rel-15 only includes the scenarios where all serving cells in MCG in FR1 and all serving cells in SCG in FR2.

For per-FR measurement gap capable UE in NR standalone operation (with single carrier, NR CA and NR-DC configuration), for per-FR gap based measurement, when there is no serving cell in a particular FR, where measurement objects are configured, regardless if explicit per-FR measurement gap is configured in this FR, the effective MGRP in this FR is used to determine requirements;

- 20 ms for FR2 NR measurements
- 40 ms for FR1 NR measurements
- 40 ms for LTE measurements
- 40 ms for FR1+LTE measurements

For per-FR measurement gap capable UE in NR standalone operation (with single carrier, NR CA and NR-DC configuration), when serving cells are in FR1 or FR2, measurement objects are in both E-UTRA /FR1 and FR2,


- If MN indicates UE that the measurement gap from MN applies to E-UTRA/FR1/FR2 serving cells, UE fulfils the per-UE measurement requirements for both E-UTRA/FR1 and FR2 measurement objects based on the measurement gap pattern configured by MN;

If measurement gap is configured in one FR but measurement object is not configured in the FR, the scheduling opportunity in the FR depends on the configured measurement gap pattern.


For E-UTRA-NR dual connectivity, if UE is not capable of per-FR-gap, total interruption time on SCG during MGL is defined only when $MGL(N) = 6ms, 4ms$ and $3ms$. And if UE is capable of per-FR-gap, total interruption time on FR1 serving cells in SCG during MGL is defined only when $MGL(N) = 6ms, 4ms$ and $3ms$, and total interruption time on FR2 serving cells in SCG during MGL is defined only when $MGL(N) = 5.5ms, 3.5ms$ and $1.5ms$, given that the reference time for per-FR gap in FR2 is based on an FR2 serving cell.

For NR standalone operation (with single carrier, NR CA and NR-DC configuration), if UE is not capable of per-FR-gap, total interruption time on a serving cell during MGL is defined when $MGL(N) = 6ms, 5.5ms, 4ms, 3.5ms, 3ms$, and $1.5ms$. And if UE is capable of per-FR-gap, total interruption time on FR1 serving cells during MGL is defined only when $MGL(N) = 6ms, 4ms$ and $3ms$, and total interruption time on FR2 serving cells during MGL is defined only when $MGL(N) = 5.5ms, 3.5ms$ and $1.5ms$, given that the reference time for per-FR gap in FR2 is based on an FR2 serving cell.


For NR-E-UTRA dual connectivity, if UE is not capable of per-FR-gap, total interruption time on MCG during MGL is defined only when $MGL(N) = 6ms, 4ms$ and $3ms$. And if UE is capable of per-FR-gap, total interruption time on FR1 serving cells in MCG during MGL is defined only when $MGL(N) = 6ms, 4ms$ and $3ms$, and total interruption time on FR2 serving cells in MCG during MGL is defined only when $MGL(N) = 5.5ms, 3.5ms$ and $1.5ms$, given that the reference time for per-FR gap in FR2 is based on an FR2 serving cell.

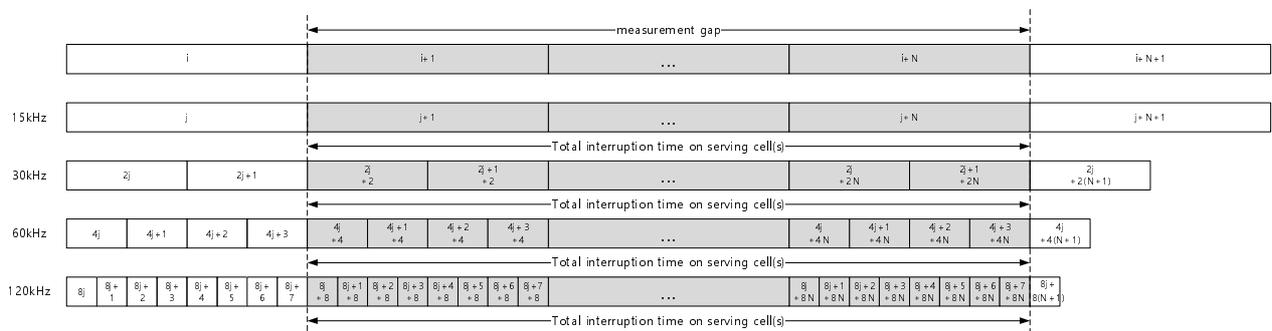


(a) Measurement gap with $MGL = N(ms)$ with MG timing advance of 0ms for synchronous EN-DC, NR standalone operation (with single carrier, NR CA and NR-DC configuration) and synchronous NE-DC

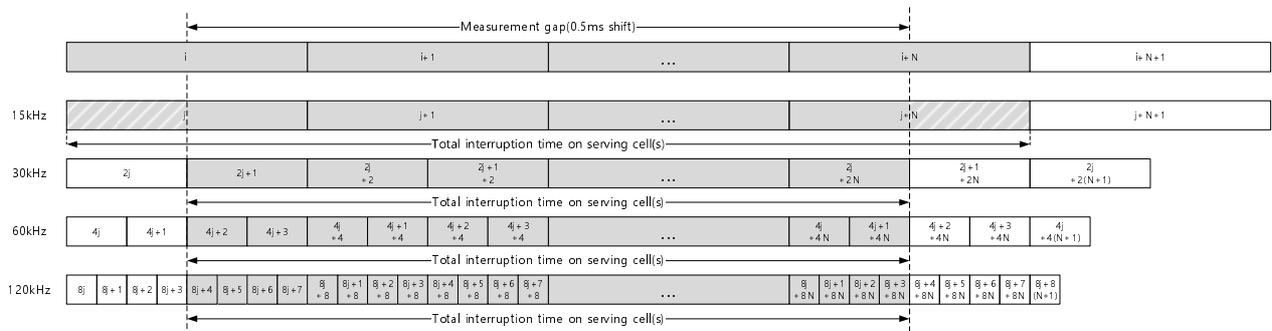

(b) Measurement gap with $MGL = N(ms)$ with MG timing advance of 0.5ms for synchronous EN-DC, NR standalone operation (with single carrier, NR CA and NR-DC configuration) and synchronous NE-DC

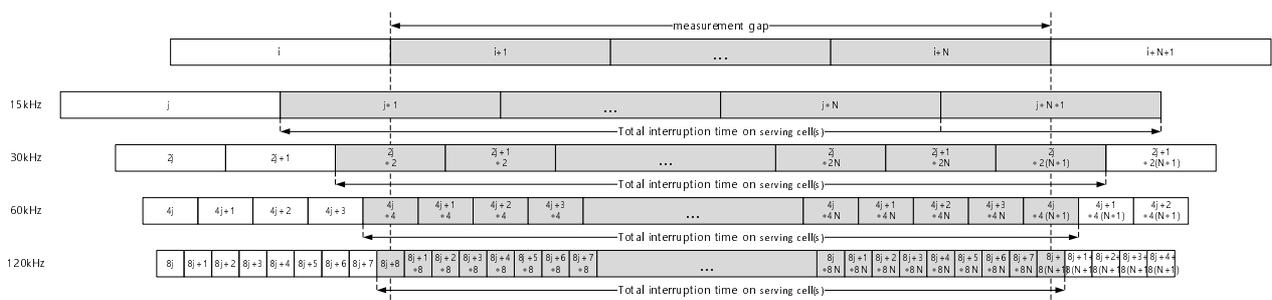

(c) Measurement gap with $MGL = N(ms)$ with MG timing advance of 0ms for asynchronous EN-DC and asynchronous NE-DC

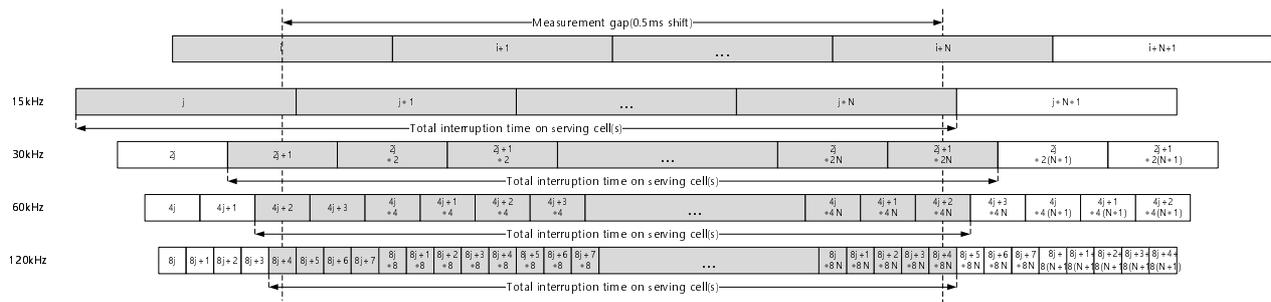

(d) Measurement gap with MGL = N(ms) with MG timing advance of 0.5ms for asynchronous EN-DC and asynchronous NE-DC

Figure 9.1.2-1: Measurement GAP and total interruption time on serving cells for EN-DC, NR standalone operation (with single carrier, NR CA and NR-DC configuration) and NE-DC

The corresponding total number of interrupted slots on serving cells is listed in Table 9.1.2-4 for synchronous EN-DC, NR standalone and NE-DC, and in Table 9.1.2-4a for asynchronous EN-DC respectively.

Table 9.1.2-4: Total number of interrupted slots on serving cells during MGL for Synchronous EN-DC, NR standalone operation (with single carrier, NR CA and NR-DC configuration) and NE-DC with per-UE measurement gap or per-FR measurement gap for FR1

| NR SCS (kHz) | Total number of interrupted slots on serving cells | | | | | |
|--------------|--|---------|---------|--|--------------------|--------------------|
| | When MG timing advance of 0ms is applied | | | When MG timing advance of 0.5ms is applied | | |
| | MGL=6ms | MGL=4ms | MGL=3ms | MGL=6ms | MGL=4ms | MGL=3ms |
| 15 | 6 | 4 | 3 | 7 ^{Note3} | 5 ^{Note3} | 4 ^{Note3} |
| 30 | 12 | 8 | 6 | 12 | 8 | 6 |
| 60 | 24 | 16 | 12 | 24 | 16 | 12 |
| 120 | 48 | 32 | 24 | 48 | 32 | 24 |

NOTE 1: For Gap Pattern ID 0, 1, 2 and 3, total number of interrupted subframes on MCG is MGL subframes when MG timing advance of 0ms is applied, and (MGL+1) subframes when MG timing advance of 0.5ms is applied.

NOTE 2: NR SCS of 120 kHz is only applicable to the case with per-UE measurement gap.

NOTE 3: Non-overlapped half-slots occur before and after the measurement gap. Whether a Rel-15 UE can receive and/or transmit in those half-slots is up to UE implementation.

Table 9.1.2-4a: Total number of interrupted slots on serving cells during MGL for Asynchronous EN-DC with per-UE measurement gap or per-FR measurement gap for FR1

| NR SCS (kHz) | Total number of interrupted slots on serving cells | | | | | |
|--------------|--|---------|---------|--|---------|---------|
| | When MG timing advance of 0ms is applied | | | When MG timing advance of 0.5ms is applied | | |
| | MGL=6ms | MGL=4ms | MGL=3ms | MGL=6ms | MGL=4ms | MGL=3ms |
| 15 | 7 | 5 | 4 | 7 | 5 | 4 |
| 30 | 13 | 9 | 7 | 13 | 9 | 7 |
| 60 | 25 | 17 | 13 | 25 | 17 | 13 |
| 120 | 49 | 33 | 25 | 49 | 33 | 25 |

NOTE 1: For Gap Pattern ID 0, 1, 2 and 3, total number of interrupted subframes on MCG is MGL subframes when MG timing advance of 0ms is applied, and (MGL+1) subframes when MG timing advance of 0.5ms is applied.

NOTE 2: NR SCS of 120 kHz is only applicable to the case with per-UE measurement gap.

In case that UE capable of per-FR measurement gap is configured with per-FR measurement gap for FR2 serving cells, total number of interrupted slots on FR2 serving cells during MGL is listed in Table 9.1.2-4b.

Table 9.1.2-4b: Total number of interrupted slots on FR2 serving cells during MGL for EN-DC, NR standalone operation (with single carrier, NR CA and NR-DC configuration) and NE-DC with per-UE measurement gap or per-FR measurement gap for FR2

| NR SCS (kHz) | Total number of interrupted slots on FR2 serving cells | | | | | |
|--------------|--|-----------|-----------|---|-----------|-----------|
| | When MG timing advance of 0ms is applied | | | When MG timing advance of 0.25ms is applied | | |
| | MGL=5.5ms | MGL=3.5ms | MGL=1.5ms | MGL=5.5ms | MGL=3.5ms | MGL=1.5ms |
| 60 | 22 | 14 | 6 | 22 | 14 | 6 |
| 120 | 44 | 28 | 12 | 44 | 28 | 12 |

It is up to UE implementation whether or not the UE is able to conduct transmission in the following slot(s),

- when MGTA is not applied, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after measurement gap
- when MGTA is applied and the SCS of the UL carrier is other than 15kHz, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after measurement gap
- when MGTA is applied and the SCS of the UL carrier is 15kHz, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after the slot partially overlapped with measurement gap

where UL slot denotes that all the symbols in the slot are uplink symbols, and $L=1$ if $(N_{TA} + N_{TA\ offset}) \times T_c$ for the UL transmission is less than the length of one slot; $L=2$ otherwise.

Note: Network is supposed to take into account the possible difference between the estimated TA at network and actual TA at UE when scheduling UE in the above slot(s).

Table 9.1.2-5: (Void)

9.1.2.1 EN-DC: Measurement Gap Sharing

For E-UTRA-NR dual connectivity UE configured with per-UE measurement gap, measurement gap sharing shall be applies when UE requires measurement gaps to identify and measure cells on intra-frequency carriers or when SMTC configured for intra-frequency measurement are fully overlapping with per-UE measurement gaps, and when UE is configured to identify and measure cells on inter-frequency carriers, E-UTRA gap-needed inter-frequency carriers and inter-RAT UTRAN carriers and/or inter-RAT GSM carriers.

For E-UTRA-NR dual connectivity UE configured with per-FR1 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR1 intra-frequency carriers or when SMTC configured for FR1 intra-frequency measurement are fully overlapping with per-FR1 measurement gaps, and when UE is configured to identify and measure cells on FR1 inter-frequency carriers, E-UTRA gap-needed inter-frequency carriers, inter-RAT UTRAN carriers and/or inter-RAT GSM carriers.

For E-UTRA-NR dual connectivity UE configured with per-FR2 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR2 intra-frequency carriers or when SMTC configured for FR2 intra-frequency measurement are fully overlapping with per-FR2 measurement gaps, and when UE is configured to identify and measure cells on FR2 inter-frequency carriers.

When network signals “01”, “10” or “11” with RRC parameter *MeasGapSharingScheme* [2][16] and the value of X is defined as in Table 9.1.2.1-1, and

- $K_{intra} = 1 / X * 100$,
- $K_{inter} = 1 / (100 - X) * 100$,

When network signals “00” indicating equal splitting gap sharing, X is not applied.

The RRC parameter *MeasGapSharingScheme* shall be applied to the calculation of carrier specific scaling factor as specified in clause 9.1.5.2.1.

Table 9.1.2.1-1: Value of parameter X for EN-DC measurement gap sharing

| measGapSharingScheme | Value of X (%) |
|-----------------------------|---|
| '00' | Equal splitting |
| '01' | 25 |
| '10' | 50 |
| '11' | 75 |
| Note: | It is left to UE implementation to determine which measurement gap sharing scheme in the table <i>to be applied</i> , when <i>MeasGapSharingScheme</i> is absent and there is no stored value in the field. |

9.1.2.1a SA: Measurement Gap Sharing

For NR standalone UE without NR-DC operation and configured with per-UE measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on intra-frequency carriers or when SMTC configured for intra-frequency measurement are fully overlapping with per-UE measurement gaps, and when UE is configured to identify and measure cells on inter-frequency carriers, and/or inter-RAT E-UTRAN carriers.

For NR standalone UE without NR-DC operation and configured with per-FR1 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR1 intra-frequency carriers or when SMTC configured for FR1 intra-frequency measurement are fully overlapping with per-FR1 measurement gaps, and when UE is configured to identify and measure cells on FR1 inter-frequency carriers and/or inter-RAT E-UTRAN carriers.

For NR standalone UE without NR-DC operation and configured with per-FR2 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR2 intra-frequency carriers or when SMTC configured for FR2 intra-frequency measurement are fully overlapping with per-FR2 measurement gaps, and when UE is configured to identify and measure cells on FR2 inter-frequency carriers.

When network signals "01", "10" or "11" with RRC parameter *MeasGapSharingScheme* [2] and the value of X is defined as in Table 9.1.2.1a-1, and

- $K_{\text{intra}} = 1 / X * 100$,
- $K_{\text{inter}} = 1 / (100 - X) * 100$,

When network signals "00" indicating equal splitting gap sharing, X is not applied.

The RRC parameter *MeasGapSharingScheme* shall be applied to the calculation of carrier specific scaling factor as specified in clause 9.1.5.2.2.

Table 9.1.2.1a-1: Value of parameter X for NR standalone measurement gap sharing

| measGapSharingScheme | Value of X (%) |
|-----------------------------|---|
| '00' | Equal splitting |
| '01' | 25 |
| '10' | 50 |
| '11' | 75 |
| Note: | It is left to UE implementation to determine which measurement gap sharing scheme in the table <i>to be applied</i> , when <i>MeasGapSharingScheme</i> is absent and there is no stored value in the field. |

9.1.2.1b NE-DC: Measurement Gap Sharing

For NR-E-UTRA dual connectivity UE configured with per-UE measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on intra-frequency carriers or when SMTC configured for intra-frequency measurement are fully overlapping with per-UE measurement gaps, and when UE is

configured to identify and measure cells on inter-frequency carriers, E-UTRA gap-needed inter-frequency carriers, and/or inter-RAT E-UTRA carriers.

For NR-E-UTRA dual connectivity UE configured with per-FR1 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR1 intra-frequency carriers or when SMTC configured for FR1 intra-frequency measurement are fully overlapping with per-FR1 measurement gaps, and when UE is configured to identify and measure cells on inter-frequency carriers, E-UTRA gap-needed inter-frequency carriers, and/or inter-RAT E-UTRA carriers.

For NR-E-UTRA dual connectivity UE configured with per-FR2 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR2 intra-frequency carriers or when SMTC configured for FR2 intra-frequency measurement are fully overlapping with per-FR2 measurement gaps, and when UE is configured to identify and measure cells on FR2 inter-frequency carriers.

When network signals “01”, “10” or “11” with RRC parameter *measGapSharingConfig* [2][16] and the value of X is defined as in Table 9.1.2.1b-1, and

- $K_{\text{intra}} = 1 / X * 100$,
- $K_{\text{inter}} = 1 / (100 - X) * 100$,

When network signals “00” indicating equal splitting gap sharing, X is not applied.

The RRC parameter *MeasGapSharingScheme* shall be applied to the calculation of carrier specific scaling factor as specified in clause 9.1.5.2.x.

Table 9.1.2.1b-1: Value of parameter X for NE-DC measurement gap sharing

| <i>measGapSharingScheme</i> | Value of X (%) |
|-----------------------------|---|
| '00' | Equal splitting |
| '01' | 25 |
| '10' | 50 |
| '11' | 75 |
| Note: | It is left to UE implementation to determine which measurement gap sharing scheme in the table <i>to be applied</i> , when <i>MeasGapSharingScheme</i> is absent and there is no stored value in the field. |

9.1.2.1c NR-DC: Measurement Gap Sharing

For UE with NR-DC operation and configured with per-UE measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on intra-frequency carriers or when SMTC configured for intra-frequency measurement are fully overlapping with per-UE measurement gaps, and when UE is configured to identify and measure cells on inter-frequency carriers, and/or inter-RAT E-UTRAN carriers.

For UE with NR-DC operation and configured with per-FR1 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR1 intra-frequency carriers or when SMTC configured for FR1 intra-frequency measurement are fully overlapping with per-FR1 measurement gaps, and when UE is configured to identify and measure cells on FR1 inter-frequency carriers and/or inter-RAT E-UTRAN carriers.

For UE with NR-DC operation and configured with per-FR2 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR2 intra-frequency carriers or when SMTC configured for FR2 intra-frequency measurement are fully overlapping with per-FR2 measurement gaps, and when UE is configured to identify and measure cells on FR2 inter-frequency carriers.

When network signals “01”, “10” or “11” with RRC parameter *measGapSharingConfig* [2] and the value of X is defined as in Table 9.1.2.1c-1, and

- $K_{\text{intra}} = 1 / X * 100$,
- $K_{\text{inter}} = 1 / (100 - X) * 100$,

When network signals “00” indicating equal splitting gap sharing, X is not applied.

The RRC parameter *MeasGapSharingScheme* shall be applied to the calculation of carrier specific scaling factor as specified in clause 9.1.5.2.x.

Table 9.1.2.1c-1: Value of parameter X for NR-DC measurement gap sharing

| <i>measGapSharingConfig</i> | Value of X (%) |
|-----------------------------|---|
| '00' | Equal splitting |
| '01' | 25 |
| '10' | 50 |
| '11' | 75 |
| Note: | It is left to UE implementation to determine which measurement gap sharing scheme in the table <i>to be applied</i> , when <i>MeasGapSharingScheme</i> is absent and there is no stored value in the field. |

9.1.3 UE Measurement capability

9.1.3.1 EN-DC: Monitoring of multiple layers using gaps

The requirements in this clause are applicable for UE capable of and configured with the EN-DC operation mode.

When monitoring of multiple inter-frequency E-UTRAN, inter-RAT NR, GSM, UTRA FDD and UTRA TDD carriers as configured by E-UTRA PCell, and inter-frequency NR carriers as configured by PSCell using gaps (or without using gaps provided the UE supports such capability) is configured, the UE shall be capable of performing one measurement of the configured measurement type (SS-RSRP, SS-RSRQ, SS-SINR, SFTD, E-UTRAN RSRP, E-UTRAN RSRQ, E-UTRAN RS-SINR measurements, UTRAN TDD P-CCPCH RSCP, UTRAN FDD CPICH measurements, GSM carrier RSSI, etc.) of detected cells on all the layers.

For UE configured with the EN-DC operation, the effective total number of frequencies excluding the frequencies of the PSCell, SCells, E-UTRA PCell, and E-UTRA SCells being monitored is $N_{\text{freq, EN-DC}}$, which is defined as:

$$N_{\text{freq, EN-DC}} = N_{\text{freq, EN-DC, NR}} + N_{\text{freq, EN-DC, E-UTRA}} + N_{\text{freq, EN-DC, UTRA}} + M_{\text{EN-DC, GSM}},$$

where

$N_{\text{freq, EN-DC, E-UTRA}}$ is the number of E-UTRA inter-frequency carriers being monitored (FDD and TDD) as configured by E-UTRA PCell or via LPP [22],

$$N_{\text{freq, EN-DC, NR}} \leq N_{\text{freq, EN-DC, NR, inter-RAT}} + N_{\text{freq, EN-DC, NR, inter-freq}}$$

where

$N_{\text{freq, EN-DC, NR, inter-RAT}}$ is the number of NR inter-RAT carriers excluding NR serving carrier(s) being monitored as configured by E-UTRA PCell [15],

$N_{\text{freq, EN-DC, NR, inter-freq}}$ is the number of NR inter-frequency carriers being monitored as configured by PSCell,

$N_{\text{freq, EN-DC, UTRA}}$ is the number of UTRA inter-RAT carriers being monitored as configured by E-UTRA PCell (FDD and TDD).

$M_{\text{EN-DC, GSM}}$ is an integer which is a function of the number of GSM inter-RAT carriers as configured by E-UTRA PCell on which measurements are being performed. $M_{\text{EN-DC, GSM}}$ is equal to 0 if no GSM carrier is being monitored. For a MGRP of 40 ms, $M_{\text{EN-DC, GSM}}$ is equal to 1 if cells on up to 32 GSM carriers are being measured. For a MGRP of 80 ms, $M_{\text{EN-DC, GSM}}$ is equal to $\text{ceil}(N_{\text{carriers, GSM}} / 20)$ where $N_{\text{carriers, GSM}}$ is the number of GSM carriers on which cells are being measured.

9.1.3.1a SA: Monitoring of multiple layers using gaps

The requirements in this clause are applicable for UE configured with SA NR operation mode.

When monitoring of multiple inter-RAT E-UTRAN carriers and inter-frequency NR carriers using gaps (or without using gaps provided the UE supports such capability) is configured by PCell, the UE shall be capable of performing one measurement of the configured measurement type (SS-RSRP, SS-RSRQ, SS-SINR, E-UTRAN RSRP, E-UTRAN RSRQ, E-UTRAN RS-SINR measurements, etc.) of detected cells on all the layers.

For UE configured with the NR SA operation, the effective total number of frequencies, excluding the frequencies of the PCell, PSCell and SCells being monitored, is $N_{\text{freq, SA}}$, which is defined as:

$$N_{\text{freq, SA}} = N_{\text{freq, SA, NR}} + N_{\text{freq, SA, E-UTRA}},$$

where

$N_{\text{freq, SA, E-UTRA}}$ is the number of E-UTRA inter-RAT carriers being monitored (FDD and TDD) as configured by PCell or via LPP [22],

$N_{\text{freq, SA, NR}}$ is the number of NR inter-frequency carriers being monitored as configured by PCell.

9.1.3.1b NE-DC: Monitoring of multiple layers using gaps

The requirements in this clause are applicable for UE capable of and configured with the NE-DC operation mode.

When monitoring of multiple inter-frequency E-UTRAN carriers as configured by E-UTRA PSCell, inter-RAT E-UTRAN carriers as configured by PCell, and inter-frequency NR carriers as configured by PCell using gaps (or without using gaps provided the UE supports such capability) is configured, the UE shall be capable of performing one measurement of the configured measurement type (SS-RSRP, SS-RSRQ, SS-SINR, SFTD, E-UTRAN RSRP, E-UTRAN RSRQ, and E-UTRAN RS-SINR measurements, etc.) of detected cells on all the layers.

For UE configured with the NE-DC operation, the effective total number of frequencies excluding the frequencies of the PCell, SCells, E-UTRA PSCell, and E-UTRA SCells being monitored is $N_{\text{freq, NE-DC}}$, which is defined as:

$$N_{\text{freq, NE-DC}} = N_{\text{freq, NE-DC, NR}} + N_{\text{freq, NE-DC, E-UTRA}},$$

where

$N_{\text{freq, NE-DC, NR}}$ is the number of NR inter-frequency carriers being monitored as configured by PCell,

$$N_{\text{freq, NE-DC, E-UTRA}} \leq N_{\text{freq, NE-DC, E-UTRA, inter-RAT}} + N_{\text{freq, NE-DC, E-UTRA, inter-freq}}$$

where

$N_{\text{freq, NE-DC, E-UTRA, inter-RAT}}$ is the number of E-UTRA inter-RAT carriers (FDD and TDD) excluding E-UTRA serving carrier(s) being monitored as configured by PCell or via LPP [22],

$N_{\text{freq, NE-DC, E-UTRA, inter-freq}}$ is the number of E-UTRA inter-frequency carriers (FDD and TDD) being monitored as configured by E-UTRA PSCell [15] or via LPP [22].

9.1.3.1c NR-DC: Monitoring of multiple layers using gaps

The requirements in this clause are applicable for UE configured with NR-DC operation mode.

When monitoring of multiple inter-RAT E-UTRAN carriers and inter-frequency NR carriers using gaps (or without using gaps provided the UE supports such capability) as configured by PCell, and inter-frequency NR carriers as configured by PSCell is configured, the UE shall be capable of performing one measurement of the configured measurement type (SS-RSRP, SS-RSRQ, SS-SINR, E-UTRAN RSRP, E-UTRAN RSRQ, E-UTRAN RS-SINR measurements, etc.) of detected cells on all the layers.

For UE configured with the NR-DC operation, the effective total number of frequencies, excluding the frequencies of the PCell, PSCell and SCells being monitored, is $N_{\text{freq, NR-DC}}$, which is defined as:

$$N_{\text{freq, NR-DC}} = N_{\text{freq, NR-DC, NR}} + N_{\text{freq, NR-DC, E-UTRA}},$$

where

$N_{\text{freq, NR-DC, E-UTRA}}$ is the number of E-UTRA inter-RAT carriers being monitored (FDD and TDD) as configured by PCell or via LPP [22].

$N_{\text{freq, NR-DC, NR}}$ is the number of NR inter-frequency carriers being monitored as configured by PCell and PSCell.

9.1.3.2 EN-DC: Maximum allowed layers for multiple monitoring

If a UE is configured with EN-DC operation, the UE shall be capable of monitoring at least:

- Depending on UE capability, 7 NR inter-frequency carriers configured by PSCell, and
- Depending on UE capability, 7 NR inter-RAT carriers excluding NR serving carrier(s) configured by E-UTRA PCell [15], and
- Depending on UE capability, 6 E-UTRA TDD inter-frequency carriers configured by E-UTRA PCell [15], and
- Depending on UE capability, 6 E-UTRA FDD inter-frequency carriers configured by E-UTRA PCell [15], and
- Depending on UE capability, 3 FDD UTRA carriers, and
- Depending on UE capability, 3 TDD UTRA carriers, and
- Depending on UE capability, 32 GSM carriers (one GSM layer corresponds to 32 carriers), and
- Depending on UE capability, 1 E-UTRA FDD inter-frequency carrier for RSTD measurements configured via LPP [22], and
- Depending on UE capability, 1 E-UTRA TDD inter-frequency carrier for RSTD measurements configured via LPP [22].

In addition to the requirements defined above, the UE shall be capable of monitoring a total of at least 13 effective carrier frequency layers comprising of any above defined combination of NR, E-UTRA FDD, E-UTRA TDD, UTRA FDD, UTRA TDD and GSM (one GSM layer corresponds to 32 carriers) layers. The UE shall be capable of monitoring a total of at least 7 effective NR carrier frequency layers excluding NR serving carrier(s), comprising of any above defined combination of NR inter-RAT carriers excluding NR serving carrier(s) configured by E-UTRA PCell and NR inter-frequency carriers configured by PSCell.

When the E-UTRA PCell and PSCell configures the same NR carrier frequency layer to be monitored by the UE in synchronous intra-band EN-DC, this layer shall be counted only once to the total number of effective carrier frequency layers provided that the SFN-s and slot boundaries are aligned, unless the configured NR carrier frequency layers to be monitored have

- different RSSI measurement resources or
- different *deriveSSB-IndexFromCell* indications or
- different SMTC configurations.

Note 1: The E-UTRA-NR dual connectivity capable UE configured with PSCell shall fulfil the requirements defined in only one of clause 9.1.3.2 and clause 8.1.2.1.1b.1 of TS 36.133 [15].

9.1.3.2a SA: Maximum allowed layers for multiple monitoring

If a UE is configured with SA NR operation mode, the UE shall be capable of monitoring at least:

- Depending on UE capability, 7 NR inter-frequency carriers configured by PCell, and
- Depending on UE capability, 7 E-UTRA TDD inter-RAT carriers configured by PCell, and
- Depending on UE capability, 7 E-UTRA FDD inter-RAT carriers configured by PCell, and
- Depending on UE capability, 1 E-UTRA FDD inter-RAT carrier for RSTD measurements configured via LPP [22], and
- Depending on UE capability, 1 E-UTRA TDD inter-RAT carrier for RSTD measurements configured via LPP [22].

In addition to the requirements defined above, the UE shall be capable of monitoring a total of at least 13 effective carrier frequency layers comprising of any above defined combination of NR, E-UTRA FDD and E-UTRA TDD layers.

9.1.3.2b NE-DC: Maximum allowed layers for multiple monitoring

If a UE is configured with NE-DC operation mode, the UE shall be capable of monitoring at least:

- Depending on UE capability, 7 NR inter-frequency carriers configured by PCell, and
- Depending on UE capability, 6 E-UTRA TDD inter-RAT carriers excluding E-UTRA serving carriers configured by PCell, and
- Depending on UE capability, 6 E-UTRA FDD inter-RAT carriers excluding E-UTRA serving carriers configured by PCell, and
- Depending on UE capability, 6 E-UTRA TDD inter-frequency carriers configured by E-UTRA PSCell [15], and
- Depending on UE capability, 6 E-UTRA FDD inter-frequency carriers configured by E-UTRA PSCell [15], and
- Depending on UE capability, 1 E-UTRA FDD inter-frequency carrier for RSTD measurements configured via LPP [22], and
- Depending on UE capability, 1 E-UTRA TDD inter-frequency carrier for RSTD measurements configured via LPP [22].

In addition to the requirements defined above, the UE shall be capable of monitoring a total of at least 13 effective carrier frequency layers comprising of any above defined combination of NR, E-UTRA FDD, and E-UTRA TDD layers. The UE shall be capable of monitoring a total of at least 6 effective E-UTRA carrier frequency layers, excluding E-UTRA serving carrier(s), comprising of any above defined combination of E-UTRA inter-RAT carriers excluding E-UTRA serving carrier(s) configured by PCell and E-UTRA inter-frequency carriers configured by E-UTRA PSCell.

9.1.3.2c NR-DC: Maximum allowed layers for multiple monitoring

If a UE is configured with NR-DC operation, the UE shall be capable of monitoring at least:

- Depending on UE capability, 7 NR inter-frequency carriers configured by PCell, and
- Depending on UE capability, 7 NR inter-frequency carriers configured by PSCell, and
- Depending on UE capability, 7 E-UTRA TDD inter-RAT carriers configured by PCell, and
- Depending on UE capability, 7 E-UTRA FDD inter-RAT carriers configured by PCell, and
- Depending on UE capability, 1 E-UTRA FDD inter-RAT carrier for RSTD measurements configured via LPP [22], and
- Depending on UE capability, 1 E-UTRA TDD inter-RAT carrier for RSTD measurements configured via LPP [22].

In addition to the requirements defined above, the UE shall be capable of monitoring a total of at least 13 effective carrier frequency layers comprising of any above defined combination of NR, E-UTRA FDD and E-UTRA TDD layers. The UE shall be capable of monitoring a total of at least 7 effective NR carrier frequency layers excluding NR serving carrier(s), which are configured by PCell and PSCell.

When PCell and PSCell configures the same NR carrier frequency layer to be monitored by the UE in NR-DC, this layer shall be counted only once to the total number of effective carrier frequency layers provided that the SFN-s and slot boundaries are aligned, unless the configured NR carrier frequency layers to be monitored have

- different RSSI measurement resources or
- different *deriveSSB-IndexFromCell* indications or
- different SMTC configurations.

9.1.4 Capabilities for Support of Event Triggering and Reporting Criteria

9.1.4.1 Introduction

This clause contains requirements on UE capabilities for support of event triggering and reporting criteria. As long as the measurement configuration does not exceed the requirements stated in clause 9.1.4.2, the UE shall meet all other performance requirements defined in clause 9 and clause 10.

The UE can be requested to make measurements under different measurement identities defined in TS 38.331 [2]. Each measurement identity corresponds to either event-based reporting, periodic reporting, or no reporting. In case of event-based reporting, each measurement identity is associated with an event triggering criterion. In case of periodic reporting, a measurement identity is associated with one periodic reporting criterion. In case of no reporting, a measurement identity is associated with one no reporting criterion.

The purpose of this clause is to set some limits on the number of different event triggering, periodic, and no reporting criteria the UE may be requested to track in parallel.

9.1.4.2 Requirements

In this clause a reporting criterion corresponds to either one event (in the case of event-based reporting), or one periodic reporting criterion (in case of periodic reporting), or one no reporting criterion (in case of no reporting). For event-based reporting, each instance of event, with the same or different event identities, is counted as separate reporting criterion in Table 9.1.4.2-1.

The UE shall be able to support in parallel per category up to E_{cat} reporting criteria according to Table 9.1.4.2-1. For the measurement categories belonging to intra-frequency, inter-frequency, and inter-RAT measurements (i.e. without counting other categories that the UE shall always support in parallel), the UE need not support more than the total number of reporting criteria as follows:

- For UE configured with EN-DC: $E_{cat,EN-DC,NR} + E_{cat,EN-DC,E-UTRA}$, where

$E_{cat,EN-DC,NR} = 10 + 9 \times n$ is the total number of NR reporting criteria configured by PSCell and E-UTRA PCell applicable for UE configured with EN-DC according to Table 9.1.4.2-1, and n is the number of configured NR serving frequencies, including PSCell and SCCells carrier frequencies,

$E_{cat,EN-DC,E-UTRA}$ is the total number of E-UTRA reporting criteria configured by E-UTRA PCell except PSCell and SCCells carrier frequencies, as specified in TS 36.133 [15] for UE configured with EN-DC.

- For UE configured with NE-DC: $E_{cat,NE-DC,NR} + E_{cat,NE-DC,E-UTRA}$, where

$E_{cat,NE-DC,NR} = 10 + 9 \times n$ is the total number of NR reporting criteria according to Table 9.1.4.2-1, and n is the number of configured NR serving frequencies, including PCell, and SCCells carrier frequencies,

$E_{cat,NE-DC,E-UTRA} = E_{cat,NE-DC,E-UTRA,inter-RAT} + E_{cat,NE-DC,E-UTRA,intra-RAT}$, where

$E_{cat,NE-DC,E-UTRA,inter-RAT}$ is the total number of inter-RAT E-UTRA reporting criteria configured by PCell except E-UTRA PSCell and E-UTRA SCCells carrier frequencies, according to Table 9.1.4.2-1,

$E_{cat,NE-DC,E-UTRA,intra-RAT}$ is the total number of E-UTRA reporting criteria including E-UTRA PSCell and E-UTRA SCCells carrier frequencies as specified in TS 36.133 [15] for UE configured with NE-DC.

- For UE configured with SA operation mode: $E_{cat,SA,NR} + E_{cat,SA,E-UTRA}$, where

$E_{cat,SA,NR} = 10 + 9 \times n$ is the total number of NR reporting criteria according to Table 9.1.4.2-1, and n is the number of configured NR serving frequencies, including PCell, and SCCells carrier frequencies,

$E_{cat,SA,E-UTRA}$ is the total number of inter-RAT E-UTRA reporting criteria according to Table 9.1.4.2-1.

- For UE configured with NR-DC: $E_{cat,NR-DC,NR} + E_{cat,NR-DC,E-UTRA}$, where

$E_{cat,NR-DC,NR} = 10 + 9 \times n$ is the total number of NR reporting criteria according to Table 9.1.4.2-1, and n is the number of configured NR serving frequencies, including PCell, PSCell and SCCells carrier frequencies,

$E_{cat, NR-DC, E-UTRA}$ is the total number of inter-RAT E-UTRA reporting criteria according to Table 9.1.4.2-1.

Table 9.1.4.2-1: Requirements for reporting criteria per measurement category

| Measurement category | E_{cat} | Note |
|---|-----------|--|
| Intra-frequency ^{Note 1,2,3,4,5} | 9 | Events for any one or a combination of intra-frequency SS-RSRP, SS-RSRQ, and SS-SINR for NG-RAN intra-frequency cells |
| Inter-frequency ^{Note 2,3,4,5} | 10 | Events for any one or a combination of inter-frequency SS-RSRP, SS-RSRQ, and SS-SINR for NG-RAN inter-frequency cells |
| Inter-RAT (E-UTRA FDD, E-UTRA TDD) ^{Note 2,4,5} | 10 | Only applicable for UE with this (inter-RAT) capability. These reporting criteria apply for any E-UTRA carrier frequencies other than the carrier frequency of the E-UTRA PSCell or E-UTRA SCell. |
| Inter-RAT (E-UTRA FDD, E-UTRA TDD) RSTD ^{Note 2,4,5} | 1 | Inter-RAT RSTD measurement reporting for UE supporting OTDOA; 1 report capable of minimum 16 inter-RAT cell measurements. Only applicable for UE with this (inter-RAT RSTD via LPP [22]) capability. These reporting criteria apply for any E-UTRA carrier frequencies other than the carrier frequency of the E-UTRA PSCell or E-UTRA SCell. |
| Inter-RAT (E-UTRA FDD, E-UTRA TDD) RSRP and RSRQ measurements for E-CID ^{Note 2,4,5} | 1 | Inter-RAT RSRP and RSRQ measurements for E-CID reported to E-SMLC via LPP [22]. One report capable of at least in total 10 inter-RAT RSRP and RSRQ measurements. Applicable to UE capable of reporting inter-RAT RSRP and RSRQ to E-SMLC via LPP. These reporting criteria apply for any E-UTRA carrier frequencies other than the carrier frequency of the E-UTRA PSCell or E-UTRA SCell. |
| NOTE 1: When the UE is configured with PSCell and SCell carrier frequencies, E_{cat} for Intra-frequency is applied per corresponding NR serving frequency. NOTE 2: Applicable for UE configured with SA NR operation mode. NOTE 3: Applicable for UE configured with EN-DC operation mode. NOTE 4: Applicable for UE configured with NE-DC operation mode. NOTE 5: Applicable for UE configured with NR-DC operation mode. | | |

9.1.5 Carrier-specific scaling factor

This clause specifies the derivation of carrier-specific scaling factor (CSSF) values, which scales the measurement delay requirements given in clause 9.2, 9.3 and 9.4 when UE is configured to monitor multiple measurement objects. The CSSF values are categorized into $CSSF_{outside_gap,i}$ and $CSSF_{within_gap,i}$, for the measurements conducted outside measurement gaps and within measurement gaps, respectively.

9.1.5.1 Monitoring of multiple layers outside gaps

The carrier-specific scaling factor $CSSF_{outside_gap,i}$ for measurement object i derived in this chapter is applied to following measurement types:

- Intra-frequency measurement with no measurement gap in clause 9.2.5, when none of the SMTC occasions of this intra-frequency measurement object are overlapped by the measurement gap.
- Intra-frequency measurement with no measurement gap in clause 9.2.5, when part of the SMTC occasions of this intra-frequency measurement object are overlapped by the measurement gap.

UE is expected to conduct the measurement of this measurement object i only outside the measurement gaps.

If the higher layer signaling in TS 38.331 [2] of *smtc2* is present and *smtc1* is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, $CSSF_{outside_gap,i}$ and requirements derived from $CSSF_{outside_gap,i}$ are not specified.

The UE cell identification and measurement periods derived based on $CSSF_{outside_gap,i}$ in clauses 9.2.5.1, 9.2.5.2 may be extended for measurement objects of which the cell identification and measurement periods are overlapped with $T_{measure_SFTD1}$ specified in clause 9.3.8 when no measurement gaps are provided.

The requirements in this clause apply provided that

- There are only SCCs in FR2, or
- The SMTC on all CCs in FR2 have the same offset, and one of following conditions is met
 - If *smtc2* is configured on any FR2 CC,
 - All CCs have the same configuration for *smtc1*, and
 - All CCs configured with *smtc2* have the same configuration for *smtc2*
 - If *smtc2* is not configured on any FR2 CC,
- The total number of different SMTC periodicities on all serving CCs does not exceed 4

Note: Longer delays for cell identification and measurement periods derived based on $CSSF_{outside_gap,i}$ in clauses 9.2.5.1, 9.2.5.2, can be expected, if the UE is configured with more than 4 different SMTC periodicities on FR2 serving carriers. The longer delay applies for the FR2 intra-frequency measurement objects with the longest SMTC periodicity/periodicities.

9.1.5.1.1 EN-DC mode: carrier-specific scaling factor for SSB-based measurements performed outside gaps

For UE configured with the E-UTRA-NR dual connectivity operation, the carrier-specific scaling factor $CSSF_{outside_gap,i}$ for intra-frequency SSB-based measurements performed outside measurements gaps will be as specified in Table 9.1.5.1.1-1.

Table 9.1.5.1.1-1: $CSSF_{outside_gap,i}$ scaling factor for EN-DC mode

| Scenario | $CSSF_{outside_gap,i}$ for FR1 PSCC | $CSSF_{outside_gap,i}$ for FR1 SCC | $CSSF_{outside_gap,i}$ for FR2 PSCC | $CSSF_{outside_gap,i}$ for FR2 SCC where neighbour cell measurement is required ^{Note 2} | $CSSF_{outside_gap,i}$ for FR2 SCC where neighbour cell measurement is not required |
|--|--------------------------------------|-------------------------------------|--------------------------------------|--|--|
| EN-DC with FR1 only CA | 1 | Number of configured FR1 SCell(s) | N/A | N/A | N/A |
| EN-DC with FR2 only intra band CA | N/A | N/A | 1 | N/A | Number of configured FR2 SCells |
| EN-DC with FR1 +FR2 CA (FR1 PSCell) ^{Note 1} | 1 | 2x(Number of configured SCell(s)-1) | N/A | ² Note 5 | 2x(Number of configured SCell(s)-1) |
| EN-DC with FR1 +FR2 CA (FR2 PSCell) ^{Note 1} | N/A | Number of configured SCell(s) | 1 | N/A | Number of configured SCell(s) |
| Note 1: Only one NR FR1 operating band and one NR FR2 operating band are included for FR1+FR2 inter-band EN-DC. Note 2: Selection of FR2 SCC where neighbour cell measurement is required follows clause 9.2.3.2. Note 3: Void Note 4: Void Note 5: $CSSF_{outside_gap,i} = 1$ if only one SCell is configured. | | | | | |

9.1.5.1.2 SA mode: carrier-specific scaling factor for SSB-based measurements performed outside gaps

For UE in SA operation mode, the carrier-specific scaling factor $CSSF_{outside_gap,i}$ for intra-frequency SSB-based measurements performed outside measurements gaps will be as specified in Table 9.1.5.1.2-1, which shall also be applied for a UE configured with NE-DC operation.

Table 9.1.5.1.2-1: $CSSF_{outside_gap,i}$ scaling factor for SA mode

| Scenario | $CSSF_{outside_gap,i}$ for FR1 PCC | $CSSF_{outside_gap,i}$ for FR1 SCC | $CSSF_{outside_gap,i}$ for FR2 PCC | $CSSF_{outside_gap,i}$ for FR2 SCC where neighbour cell measurement is required | $CSSF_{outside_gap,i}$ for FR2 SCC where neighbour cell measurement is not required |
|---|-------------------------------------|-------------------------------------|-------------------------------------|--|--|
| FR1 only CA | 1 | Number of configured FR1 SCell(s) | N/A | N/A | N/A |
| FR2 only intra band CA | N/A | N/A | 1 | N/A | Number of configured FR2 SCell(s) |
| FR1 +FR2 CA (FR1 PCell) ^{Note 1} | 1 | 2x(Number of configured SCell(s)-1) | N/A | ² ^{Note 5} | 2x(Number of configured SCell(s)-1) |
| Note 1: Only one FR1 operating band and one FR2 operating band are included for FR1+FR2 inter-band CA. Note 2: Selection of FR2 SCC where neighbour cell measurement is required follows clause 9.2.3.2. Note 3: Void Note 4: Void Note 5: $CSSF_{outside_gap,i}=1$ if only one SCell is configured. | | | | | |

9.1.5.1.3 NR-DC mode: carrier-specific scaling factor for SSB-based measurements performed outside gaps

For UE configured with NR-DC operation, the carrier-specific scaling factor $CSSF_{outside_gap,i}$ for intra-frequency SSB-based measurements performed outside measurements gaps will be as specified in Table 9.1.5.1.3-1.

Table 9.1.5.1.3-1: $CSSF_{outside_gap,i}$ scaling factor for NR-DC mode

| Scenario | $CSSF_{outside_gap,i}$ for FR1 PCC | $CSSF_{outside_gap,i}$ for FR1 SCC | $CSSF_{outside_gap,i}$ for FR2 PSCC | $CSSF_{outside_gap,i}$ for FR2 SCC where neighbour cell measurement is not required |
|--|-------------------------------------|-------------------------------------|--------------------------------------|--|
| FR1 + FR2 NR-DC (FR1 PCell and FR2 PCell) ^{Note 1} | 1 | 2x(Number of configured SCell(s)) | ² ^{Note 3} | 2x(Number of configured SCell(s)) |
| Note 1: NR-DC in Rel-15 only includes the scenarios where all serving cells in MCG in FR1 and all serving cells in SCG in FR2. Note 2: Void Note 3: $CSSF_{outside_gap,i}=1$ if no SCell is configured. | | | | |

9.1.5.1.4 NE-DC mode: carrier-specific scaling factor for SSB-based measurements performed outside gaps

For UE configured with NE-DC operation, the carrier-specific scaling factor $CSSF_{outside_gap,i}$ for intra-frequency SSB-based measurements performed outside measurements gaps will be as specified in Table 9.1.5.1.4-1.

Table 9.1.5.1.4-1: $CSSF_{outside_gap,i}$ scaling factor for NE-DC mode

| Scenario | $CSSF_{outside_gap,i}$ for FR1 PCC | $CSSF_{outside_gap,i}$ for FR1 SCC | $CSSF_{outside_gap,i}$ for FR2 PCC | $CSSF_{outside_gap,i}$ for FR2 SCC where neighbour cell measurement is required | $CSSF_{outside_gap,i}$ for FR2 SCC where neighbour cell measurement is not required |
|---|-------------------------------------|-------------------------------------|-------------------------------------|--|--|
| NE-DC with FR1 only CA | 1 | Number of configured FR1 SCell(s) | N/A | N/A | N/A |
| NE-DC with FR2 only intra band CA | N/A | N/A | 1 | N/A | Number of configured FR2 SCell(s) |
| NE-DC with FR1 +FR2 CA (FR1 PCell) ^{Note 1} | 1 | 2x(Number of configured SCell(s)-1) | N/A | ² ^{Note 3} | 2x(Number of configured SCell(s)-1) |
| Note 1: Only one FR1 operating band and one FR2 operating band are included for FR1+FR2 inter-band CA. Note 2: Selection of FR2 SCC where neighbour cell measurement is required follows clause 9.2.3.2. Note 3: $CSSF_{outside_gap,i}=1$ if only one SCell is configured. | | | | | |

9.1.5.2 Monitoring of multiple layers within gaps

The carrier-specific scaling factor $CSSF_{within_gap,i}$ for measurement object i derived in this chapter is applied to following measurement types:

- Intra-frequency measurement object with no measurement gap in clause 9.2.5, when all of the SMTC occasions of this intra-frequency measurement object are overlapped by the measurement gap.
- Intra-frequency measurement object with measurement gap in clause 9.2.6.
- Inter-frequency measurement object in clause 9.3.
- E-UTRA Inter-RAT measurement object in clauses 9.4.2 and 9.4.3.
- E-UTRA Inter-RAT RSTD and E-CID measurements in clauses 9.4.4 and 9.4.5.
- NR Inter-RAT measurement object configured by the E-UTRAN PCell (TS 36.133 [15] clause 8.17.4).
- E-UTRAN Inter-frequency measurement object configured by the E-UTRAN PCell (TS 36.133 [15] clause 8.17.3) and by the E-UTRAN PSCell (TS 36.133 [15] clause 8.19.3).
- E-UTRAN Inter-frequency RSTD measurement configured by the E-UTRAN PCell (TS 36.133 [15] clause 8.17.15).
- UTRA Inter-RAT measurement object configured by the E-UTRAN PCell (TS 36.133 [15] clauses 8.17.5 to 8.17.12).
- GSM Inter-RAT measurements configured by the E-UTRAN PCell (TS 36.133 [15] clauses 8.17.13 and 8.17.14).

UE is expected to conduct the measurement of this measurement object i only within the measurement gaps.

If the higher layer signaling in TS 38.331 [2] of *smtc2* is present and *smtc1* is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, $CSSF_{within_gap,i}$ and requirements derived from $CSSF_{outside_gap,i}$ are not specified.

9.1.5.2.1 EN-DC mode: carrier-specific scaling factor for SSB-based measurements performed within gaps

The scaling value $CSSF_{within_gap,i}$ below has been derived without considering GSM inter-RAT carriers.

When one or more measurement objects are monitored within measurement gaps, the carrier specific scaling factor for a target measurement object with index i is designated as $CSSF_{within_gap,i}$ and is derived as described in this clause.

If measurement object i refers to an RSTD measurement with periodicity $T_{prs} > 160\text{ms}$ or with periodicity $T_{prs} = 160\text{ms}$ but $prs\text{-MutingInfo-r9}$ is configured, $CSSF_{\text{within_gap},i} = 1$. Otherwise, the $CSSF_{\text{within_gap},i}$ for other measurement objects (including RSTD measurement with periodicity $T_{prs} = 160\text{ms}$) participate in the gap competition are derived as below.

For each measurement gap j not used for an RSTD measurement with periodicity $T_{prs} > 160\text{ms}$ or with periodicity $T_{prs} = 160\text{ms}$ but $prs\text{-MutingInfo-r9}$ is configured within an arbitrary 160ms period, count the total number of intrafrequency measurement objects and interfrequency/interRAT measurement objects which are candidates to be measured within the gap j .

- An NR measurement object is a candidate to be measured in a gap if its SMTC duration is fully covered by the MGL excluding RF switching time. For intra-frequency NR carriers, if the higher layer in TS 38.331 [2] signaling of $smtc2$ is configured, the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter $smtc2$; otherwise the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter $smtc1$
- An inter-RAT measurement object configured by PSCell is a candidate to be measured in all measurement gaps.
- An inter-RAT UTRA measurement object configured by E-UTRA PCell [15] is a candidate to be measured in all measurement gaps.
- An inter-frequency E-UTRA measurement object is a candidate to be measured in all measurement gaps.
- For UEs which support and are configured with per FR gaps, the counting is done on a per FR basis, and for UEs which are configured with per UE gaps the counting is done on a per UE basis.
- $M_{\text{intra},i,j}$: Number of intra-frequency measurement objects which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{intra},i,j}$ equals 0.
- $M_{\text{inter},i,j}$: Number of NR inter-frequency measurement objects or NR inter-RAT measurement objects configured by E-UTRA PCell, EUTRA inter-frequency measurement objects configured by E-UTRA PCell, UTRA inter-RAT measurement objects configured by E-UTRA PCell which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{inter},i,j}$ equals 0.
- $M_{\text{tot},i,j} = M_{\text{intra},i,j} + M_{\text{inter},i,j}$: Total number of intra-frequency, inter-frequency and inter-RAT measurement objects which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{tot},i,j}$ equals 0.

For each measurement gap j used for an RSTD measurement with periodicity $T_{prs} > 160\text{ms}$ or with periodicity $T_{prs} = 160\text{ms}$ but $prs\text{-MutingInfo-r9}$ is configured within an arbitrary 160ms period, $M_{\text{intra},i,j} = M_{\text{inter},i,j} = M_{\text{tot},i,j} = 0$.

The carrier specific scaling factor $CSSF_{\text{within_gap},i}$ is given by:

If $measGapSharingScheme$ is equal sharing, $CSSF_{\text{within_gap},i} = \max(\text{ceil}(R_i \times M_{\text{tot},i,j}))$, where $j = 0 \dots (160/\text{MGRP}) - 1$

If $measGapSharingScheme$ is not equal sharing and

- measurement object i is an intra-frequency measurement object, $CSSF_{\text{within_gap},i}$ is the maximum among
 - $\text{ceil}(R_i \times K_{\text{intra}} \times M_{\text{intra},i,j})$ in gaps where $M_{\text{inter},i,j} \neq 0$, where $j = 0 \dots (160/\text{MGRP}) - 1$
 - $\text{ceil}(R_i \times M_{\text{intra},i,j})$ in gaps where $M_{\text{inter},i,j} = 0$, where $j = 0 \dots (160/\text{MGRP}) - 1$
- measurement object i is an inter-frequency or inter-RAT measurement object, $CSSF_{\text{within_gap},i}$ is the maximum among
 - $\text{ceil}(R_i \times K_{\text{inter}} \times M_{\text{inter},i,j})$ in gaps where $M_{\text{intra},i,j} \neq 0$, where $j = 0 \dots (160/\text{MGRP}) - 1$
 - $\text{ceil}(R_i \times M_{\text{inter},i,j})$ in gaps where $M_{\text{intra},i,j} = 0$, where $j = 0 \dots (160/\text{MGRP}) - 1$

Where R_i is the maximal ratio of the number of measurement gap where measurement object i is a candidate to be measured over the number of measurement gap where measurement object i is a candidate and not used for RSTD measurement with periodicity $T_{prs} > 160\text{ms}$ or with periodicity $T_{prs} = 160\text{ms}$ but $prs\text{-MutingInfo-r9}$ is configured within an arbitrary 1280ms period.

9.1.5.2.2 SA mode: carrier-specific scaling factor for SSB-based measurements performed within gaps

When one or more measurement objects are monitored within measurement gaps, the carrier specific scaling factor for a target measurement object with index i is designated as $CSSF_{\text{within_gap},i}$ and is derived as described in this clause.

If measurement object i refers to an RSTD measurement with periodicity $T_{\text{prs}} > 160\text{ms}$ or with periodicity $T_{\text{prs}} = 160\text{ms}$ but *prs-MutingInfo-r9* is configured, $CSSF_{\text{within_gap},i} = 1$. Otherwise, the $CSSF_{\text{within_gap},i}$ for other measurement objects (including RSTD measurement with periodicity $T_{\text{prs}} = 160\text{ms}$) participate in the gap competition and the $CSSF_{\text{within_gap},i}$ are derived as below.

For each measurement gap j not used for an RSTD measurement with periodicity $T_{\text{prs}} > 160\text{ms}$ or with periodicity $T_{\text{prs}} = 160\text{ms}$ but *prs-MutingInfo-r9* is configured within an arbitrary 160ms period, count the total number of intrafrequency measurement objects and interfrequency/interRAT measurement objects which are candidates to be measured within the gap j .

- An NR measurement object is a candidate to be measured in a gap if its SMTC duration is fully covered by the MGL excluding RF switching time. For intra-frequency NR measurement objects, if the higher layer in TS 38.331 [2] signaling of *smtc2* is configured, the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc2*; otherwise the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc1*.
- An inter-RAT measurement object is a candidate to be measured in all measurement gaps.
- An inter-frequency SFTD measurement object is a candidate to be measured in all measurement gaps.
- For UEs which support and are configured with per FR gaps, the counting is done on a per FR basis, and for UEs which are configured with per UE gaps the counting is done on a per UE basis.
- $M_{\text{intra},i,j}$: Number of intra-frequency measurement objects which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{intra},i,j}$ equals 0.
- $M_{\text{inter},i,j}$: Number of NR inter-frequency and EUTRA inter-RAT measurement objects which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{inter},i,j}$ equals 0.
- $M_{\text{tot},i,j} = M_{\text{intra},i,j} + M_{\text{inter},i,j}$: Total number of intra-frequency, inter-frequency and inter-RAT measurement objects which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{tot},i,j}$ equals 0.

For each measurement gap j used for an RSTD measurement with periodicity $T_{\text{prs}} > 160\text{ms}$ or with periodicity $T_{\text{prs}} = 160\text{ms}$ but *prs-MutingInfo-r9* is configured within an arbitrary 160ms period, $M_{\text{intra},i,j} = M_{\text{inter},i,j} = M_{\text{tot},i,j} = 0$.

The carrier specific scaling factor $CSSF_{\text{within_gap},i}$ is given by:

- If *measGapSharingScheme* is equal sharing, $CSSF_{\text{within_gap},i} = \max(\text{ceil}(R_i \times M_{\text{tot},i,j}))$, where $j = 0 \dots (160/\text{MGRP}) - 1$
- If *measGapSharingScheme* is not equal sharing and
 - measurement object i is an intra-frequency measurement object, $CSSF_{\text{within_gap},i}$ is the maximum among
 - $\text{ceil}(R_i \times K_{\text{intra}} \times M_{\text{intra},i,j})$ in gaps where $M_{\text{inter},i,j} \neq 0$, where $j = 0 \dots (160/\text{MGRP}) - 1$
 - $\text{ceil}(R_i \times M_{\text{intra},i,j})$ in gaps where $M_{\text{inter},i,j} = 0$, where $j = 0 \dots (160/\text{MGRP}) - 1$
 - measurement object i is an inter-frequency or inter-RAT measurement object, $CSSF_{\text{within_gap},i}$ is the maximum among
 - $\text{ceil}(R_i \times K_{\text{inter}} \times M_{\text{inter},i,j})$ in gaps where $M_{\text{intra},i,j} \neq 0$, where $j = 0 \dots (160/\text{MGRP}) - 1$
 - $\text{ceil}(R_i \times M_{\text{inter},i,j})$ in gaps where $M_{\text{intra},i,j} = 0$, where $j = 0 \dots (160/\text{MGRP}) - 1$
- Where R_i is the maximal ratio of the number of measurement gap where measurement object i is a candidate to be measured over the number of measurement gap where measurement object i is a candidate and not used for RSTD measurement with periodicity $T_{\text{prs}} > 160\text{ms}$ or with periodicity $T_{\text{prs}} = 160\text{ms}$ but *prs-MutingInfo-r9* is configured within an arbitrary 1280ms period.

$CSSF_{\text{within_gap},k}=1$ during $T_{\text{Detect, E-UTRAN FDD}}$ specified in clause 9.4.4.1.2.2 and $T_{\text{Detect, E-UTRAN TDD}}$ specified in clause 9.4.4.2.2.2, where k is the carrier frequency where the UE is performing cell detection of the inter-RAT E-UTRA OTDOA assistance data reference cell when acquiring the subframe and slot timing of the cell according to clause 9.4.4. In this case, the UE cell identification and measurement periods derived based on $CSSF_{\text{within_gap},i}$ in clauses 9.2.5.1, 9.2.5.2, 9.2.6.2, 9.2.6.3, 9.3.4, 9.3.5, 9.4.2.2, and 9.4.2.3 may be extended for measurement objects of which the cell identification and measurement periods are overlapped with $T_{\text{Detect, E-UTRAN FDD}}$ and $T_{\text{Detect, E-UTRAN TDD}}$.

9.1.5.2.3 NE-DC: carrier-specific scaling factor for SSB-based measurements performed within gaps

When one or more measurement objects are monitored within measurement gaps, the carrier specific scaling factor for a target measurement object with index i is designated as $CSSF_{\text{within_gap},i}$ and is derived as described in this clause.

If measurement object i refers to an RSTD measurement with periodicity $T_{\text{prs}} > 160\text{ms}$ or with periodicity $T_{\text{prs}} = 160\text{ms}$ but *prs-MutingInfo-r9* is configured, $CSSF_{\text{within_gap},i} = 1$. Otherwise, the $CSSF_{\text{within_gap},i}$ for other measurement objects (including RSTD measurement with periodicity $T_{\text{prs}} = 160\text{ms}$) participate in the gap competition are derived as below.

For each measurement gap j not used for an RSTD measurement with periodicity $T_{\text{prs}} > 160\text{ms}$ or with periodicity $T_{\text{prs}} = 160\text{ms}$ but *prs-MutingInfo-r9* is configured within an arbitrary 160ms period, count the total number of intrafrequency measurement objects and interfrequency/interRAT measurement objects which are candidates to be measured within the gap j .

- An NR measurement object is a candidate to be measured in a gap if its SMTC duration is fully covered by the MGL excluding RF switching time. For intra-frequency NR measurement objects, if the higher layer in TS 38.331 [2] signaling of *smtc2* is configured, the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc2*; otherwise the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc1*.
- An inter-RAT measurement object is a candidate to be measured in all measurement gaps.
- An inter-frequency E-UTRA measurement object is a candidate to be measured in all measurement gaps.
- For UEs which support and are configured with per FR gaps, the counting is done on a per FR basis, and for UEs which are configured with per UE gaps the counting is done on a per UE basis.
- If the number of configured inter-frequency and inter-RAT measurement objects is non-zero and the UE is configured with per UE gaps, or if the UE is configured with per FR gaps:
 - FR1 and FR2 intra-frequency measurement objects belong to group A
 - Inter-frequency and inter-RAT measurement objects belong to group B
 - $M_{\text{groupA},i,j}$: Sum of the number of FR1 intra-frequency measurement objects $M_{\text{intra-FR1},i,j}$ and the number of FR2 intra-frequency measurement objects $M_{\text{intra-FR2},i,j}$ which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{groupA},i,j}$ equals 0.
 - $M_{\text{groupB},i,j}$: Number of NR inter-frequency and EUTRA inter-RAT measurement objects which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{groupB},i,j}$ equals 0.
- If the number of configured inter-frequency and inter-RAT measurement objects is zero and the UE is configured with per UE gaps:
 - FR1 intra-frequency measurement objects belong to group A
 - FR2 intra-frequency measurement objects belong to group B
 - $M_{\text{groupA},i,j}$: The number of FR1 intra-frequency measurement objects $M_{\text{intra-FR1},i,j}$ which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{groupA},i,j}$ equals 0.
 - $M_{\text{groupB},i,j}$: The number of FR2 intra-frequency measurement objects $M_{\text{intra-FR2},i,j}$ which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{groupB},i,j}$ equals 0.
- $M_{\text{tot},i,j} = M_{\text{groupA},i,j} + M_{\text{groupB},i,j}$: Total number of group A and group B measurement objects which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{tot},i,j}$ equals 0.

For each measurement gap j used for an RSTD measurement with periodicity $T_{\text{prs}} > 160\text{ms}$ or with periodicity $T_{\text{prs}} = 160\text{ms}$ but *prs-MutingInfo-r9* is configured within an arbitrary 160ms period, $M_{\text{intra},i,j} = M_{\text{inter},i,j} = M_{\text{tot},i,j} = 0$.

- The carrier specific scaling factor $\text{CSSF}_{\text{within_gap},i}$ is given by:
 - If *measGapSharingScheme* is equal sharing, $\text{CSSF}_{\text{within_gap},i} = \max(\text{ceil}(R_i \times M_{\text{tot},i,j}))$, where $j = 0 \dots (160/\text{MGRP}) - 1$
 - If *measGapSharingScheme* is not equal sharing and
 - measurement object i is a group A measurement object, $\text{CSSF}_{\text{within_gap},i}$ is the maximum among
 - $\text{ceil}(R_i \times K_{\text{intra}} \times M_{\text{groupA},i,j})$ in gaps where $M_{\text{groupB},i,j} \neq 0$, where $j = 0 \dots (160/\text{MGRP}) - 1$
 - $\text{ceil}(R_i \times M_{\text{groupA},i,j})$ in gaps where $M_{\text{groupB},i,j} = 0$, where $j = 0 \dots (160/\text{MGRP}) - 1$
 - measurement object i is an group B measurement object, $\text{CSSF}_{\text{within_gap},i}$ is the maximum among
 - $\text{ceil}(R_i \times K_{\text{inter}} \times M_{\text{groupB},i,j})$ in gaps where $M_{\text{groupA},i,j} \neq 0$, where $j = 0 \dots (160/\text{MGRP}) - 1$
 - $\text{ceil}(R_i \times M_{\text{groupB},i,j})$ in gaps where $M_{\text{groupA},i,j} = 0$, where $j = 0 \dots (160/\text{MGRP}) - 1$
 - Where R_i is the maximal ratio of the number of measurement gap where measurement object i is a candidate to be measured over the number of measurement gap where measurement object i is a candidate and not used for RSTD measurement with periodicity $T_{\text{prs}} > 160\text{ms}$ or with periodicity $T_{\text{prs}} = 160\text{ms}$ but *prs-MutingInfo-r9* is configured within an arbitrary 1280ms period.

9.1.5.2.4 NR-DC: carrier-specific scaling factor for SSB-based measurements performed within gaps

When one or more measurement objects are monitored within measurement gaps, the carrier specific scaling factor for a target measurement object with index i is designated as $\text{CSSF}_{\text{within_gap},i}$ and is derived as described in this clause.

If measurement object i refers to an RSTD measurement with periodicity $T_{\text{prs}} > 160\text{ms}$ or with periodicity $T_{\text{prs}} = 160\text{ms}$ but *prs-MutingInfo-r9* is configured, $\text{CSSF}_{\text{within_gap},i} = 1$. Otherwise, the $\text{CSSF}_{\text{within_gap},i}$ for other measurement objects (including RSTD measurement with periodicity $T_{\text{prs}} = 160\text{ms}$) participate in the gap competition and the $\text{CSSF}_{\text{within_gap},i}$ are derived as below.

For each measurement gap j not used for an RSTD measurement with periodicity $T_{\text{prs}} > 160\text{ms}$ or with periodicity $T_{\text{prs}} = 160\text{ms}$ but *prs-MutingInfo-r9* is configured within an arbitrary 160ms period, count the total number of intra-frequency measurement objects and inter-frequency/interRAT measurement objects which are candidates to be measured within the gap j .

- An NR measurement object is a candidate to be measured in a gap if its SMTC duration is fully covered by the MGL excluding RF switching time. For intra-frequency NR measurement objects, if the higher layer in TS 38.331 [2] signaling of *smtc2* is configured, the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc2*; otherwise the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc1*.
- An inter-RAT measurement object is a candidate to be measured in all measurement gaps.

For UEs which support and are configured with per FR gaps, the counting is done on a per FR basis, and for UEs which are configured with per UE gaps the counting is done on a per UE basis.

If the number of configured inter-frequency and inter-RAT measurement objects is non-zero and the UE is configured with per UE gaps, or if the UE is configured with per FR gaps:

FR1 and FR2 intra-frequency measurement objects belong to group A

Inter-frequency and inter-RAT measurement objects belong to group B

$M_{\text{groupA},i,j}$: Sum of the number of FR1 intra-frequency measurement objects $M_{\text{intra-FR1},i,j}$ and the number of FR2 intra-frequency measurement objects $M_{\text{intra-FR2},i,j}$ which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{groupA},i,j}$ equals 0.

$M_{\text{groupB},i,j}$: Number of NR inter-frequency and EUTRA inter-RAT measurement objects which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{groupB},i,j}$ equals 0.

If the number of configured inter-frequency and inter-RAT measurement objects is zero and the UE is configured with per UE gaps:

FR1 intra-frequency measurement objects belong to group A

FR2 intra-frequency measurement objects belong to group B

$M_{\text{groupA},i,j}$: The number of FR1 intra-frequency measurement objects $M_{\text{intra-FR1},i,j}$ which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{groupA},i,j}$ equals 0.

$M_{\text{groupB},i,j}$: The number of FR2 intra-frequency measurement objects $M_{\text{intra-FR2},i,j}$ which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{groupB},i,j}$ equals 0.

$M_{\text{tot},i,j} = M_{\text{groupA},i,j} + M_{\text{groupB},i,j}$: Total number of group A and group B measurement objects which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{tot},i,j}$ equals 0.

For each measurement gap j used for an RSTD measurement with periodicity $T_{\text{prs}} > 160\text{ms}$ or with periodicity $T_{\text{prs}} = 160\text{ms}$ but *prs-MutingInfo-r9* is configured within an arbitrary 160ms period, $M_{\text{intra},i,j} = M_{\text{inter},i,j} = M_{\text{tot},i,j} = 0$.

The carrier specific scaling factor $\text{CSSF}_{\text{within_gap},i}$ is given by:

If *measGapSharingScheme* is equal sharing, $\text{CSSF}_{\text{within_gap},i} = \max(\text{ceil}(R_i \times M_{\text{tot},i,j}))$, where $j=0 \dots (160/\text{MGRP})-1$

If *measGapSharingScheme* is not equal sharing and

- measurement object i is a group A measurement object, $\text{CSSF}_{\text{within_gap},i}$ is the maximum among
 - $\text{ceil}(R_i \times K_{\text{intra}} \times M_{\text{groupA},i,j})$ in gaps where $M_{\text{groupB},i,j} \neq 0$, where $j=0 \dots (160/\text{MGRP})-1$
 - $\text{ceil}(R_i \times M_{\text{groupA},i,j})$ in gaps where $M_{\text{groupB},i,j} = 0$, where $j=0 \dots (160/\text{MGRP})-1$
- measurement object i is an group B measurement object, $\text{CSSF}_{\text{within_gap},i}$ is the maximum among
 - $\text{ceil}(R_i \times K_{\text{inter}} \times M_{\text{groupB},i,j})$ in gaps where $M_{\text{groupA},i,j} \neq 0$, where $j=0 \dots (160/\text{MGRP})-1$
 - $\text{ceil}(R_i \times M_{\text{groupB},i,j})$ in gaps where $M_{\text{groupA},i,j} = 0$, where $j=0 \dots (160/\text{MGRP})-1$

R_i is the maximal ratio of the number of measurement gap where measurement object i is a candidate to be measured over the number of measurement gap where measurement object i is a candidate and not used for RSTD measurement with periodicity $T_{\text{prs}} > 160\text{ms}$ or with periodicity $T_{\text{prs}} = 160\text{ms}$ but *prs-MutingInfo-r9* is configured within an arbitrary 1280ms period.

9.1.6 Minimum requirement at transitions

When the measurement on one intra-frequency measurement object transitions from measurements performed outside gaps to measurements performed within gaps or vice versa during one measurement period, the cell identification and measurement period requirements with the longer delay apply.

The carrier-specific scaling factor specified in clause 9.1.5 that applies to the other impacted measurement objects will also apply based on the longer measurement or cell identification delay before or after the transition.

When the UE transitions between DRX and non-DRX or when DRX cycle periodicity changes, the cell identification and measurement period requirements apply based on the longer delay before or after the transition.

Subsequent to this measurement period, the cell identification and measurement period requirements on each measurement object are corresponding to the second mode after transition.

9.2 NR intra-frequency measurements

9.2.1 Introduction

A measurement is defined as a SSB based intra-frequency measurement provided the centre frequency of the SSB of the serving cell indicated for measurement and the centre frequency of the SSB of the neighbour cell are the same, and the subcarrier spacing of the two SSBs are also the same.

The UE shall be able to identify new intra-frequency cells and perform SS-RSRP, SS-RSRQ, and SS-SINR measurements of identified intra-frequency cells if carrier frequency information is provided by PCell or the PSCell, even if no explicit neighbour list with physical layer cell identities is provided.

The UE can perform intra-frequency SSB based measurements without measurement gaps if

- the SSB is completely contained in the active BWP of the UE, or
- the active downlink BWP is initial BWP[3].

For intra-frequency SSB based measurements without measurement gaps, UE may cause scheduling restriction as specified in clause 9.2.5.3.

SSB based measurements are configured along with one or two measurement timing configuration(s) (SMTC(s)) which provides periodicity, duration and offset information on a window of up to 5ms where the measurements are to be performed. For intra-frequency connected mode measurements, up to two measurement window periodicities may be configured. A single measurement window offset and measurement duration are configured per intra-frequency measurement object.

When measurement gaps are needed, the UE is not expected to detect SSB which start earlier than the gap starting time + switching time, nor detect SSB which end later than the gap end – switching time. Switching time is 0.5ms for frequency range FR1 and 0.25ms for frequency range FR2.

9.2.2 Requirements applicability

The requirements in clause 9.2 apply, provided:

- The cell being identified or measured is detectable.

An intra-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in clauses 10.1.2 and 10.1.3 for FR1 and FR2, respectively, for a corresponding Band,
- SS-RSRQ related side conditions given in clauses 10.1.7 and 10.1.8 for FR1 and FR2, respectively, for a corresponding Band,
- SS-SINR related side conditions given in clauses 10.1.12 and 10.1.13 for FR1 and FR2, respectively, for a corresponding Band,
- SSB_{RP} and SSB \hat{E}_s/I_{ot} according to Annex B.2.2 for a corresponding Band.

9.2.3 Number of cells and number of SSB

9.2.3.1 Requirements for FR1

For each intra-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 8 identified cells, and
- 14 SSBs with different SSB index and/or PCI on the intra-frequency layer, where the number of SSBs in the serving cell (except for the SCell) is not smaller than the number of configured RLM-RS SSB resources.

9.2.3.2 Requirements for FR2

For one single intra-frequency layer in a band, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 6 identified cells, and
- 24 SSBs with different SSB index and/or PCI,

where this single intra-frequency layer shall be:

- PCC when UE is configured with SA NR operation mode with PCC in the band; or
- PSCC when UE is configured with EN-DC with PSCC in the band; or
- One of the SCCs on which UE is configured to report SSB based measurements when neither PCC nor PSCC is in the same band, so that the selected SCC shall be an SCC where the UE is configured with SS-RSRP measurement reporting if such SCC exists, otherwise the selected SCC is determined by UE implementation.

The UE shall also be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least 2 SSBs on serving cell for each of the other intra-frequency layer(s) in the same band.

9.2.4 Measurement Reporting Requirements

9.2.4.1 Periodic Reporting

Reported RSRP, RSRQ, and RS-SINR measurements contained in periodic measurement reports shall meet the requirements in clauses 10.1.2.1 (RSRP for FR1), 10.1.3.1 (RSRP for FR2), 10.1.7.1 (RSRQ for FR1), 10.1.8.1 (RSRQ for FR2), 10.1.12.1 (RS-SINR for FR1) and 10.1.13.1 (RS-SINR for FR2).

9.2.4.2 Event-triggered Periodic Reporting

Reported RSRP, RSRQ, and RS-SINR measurements contained in event-triggered periodic measurement reports shall meet the requirements in clauses 10.1.2.1 (RSRP for FR1), 10.1.3.1 (RSRP for FR2), 10.1.7.1 (RSRQ for FR1), 10.1.8.1 (RSRQ for FR2), 10.1.12.1 (RS-SINR for FR1) and 10.1.13.1 (RS-SINR for FR2).

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.2.4.3.

9.2.4.3 Event Triggered Reporting

Reported RSRP, RSRQ, and RS-SINR measurements contained in event triggered measurement reports shall meet the requirements in clauses 10.1.2.1 (RSRP for FR1), 10.1.3.1 (RSRP for FR2), 10.1.7.1 (RSRQ for FR1), 10.1.8.1 (RSRQ for FR2), 10.1.12.1 (RS-SINR for FR1) and 10.1.13.1 (RS-SINR for FR2).

The UE shall not send any event triggered measurement reports as long as no reporting criteria is fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources being available for UE to send the measurement report on.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{\text{identify_intra_with_index}}$ Or $T_{\text{identify_intra_without_index}}$ defined in clause 9.2.5.1 or clause 9.2.6.2. When L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSBs measured from the Cell being configured remains detectable during the time period $T_{\text{identify_intra_without_index}}$ Or $T_{\text{identify_intra_with_index}}$ as defined in clause 9.2.5.1 or clause 9.2.6.2. If a cell which has been detectable at least for the time period $T_{\text{identify_intra_without_index}}$ Or $T_{\text{identify_intra_with_index}}$ defined in clause 9.2.5.1 or clause 9.2.6.2 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again with the same spatial reception parameter and triggers an event, the event triggered measurement reporting delay shall be less than

$T_{SSB_measurement_period_intra}$ provided the timing to that cell has not changed more than $\pm 3200 T_c$ while the measurement gap has not been available and L3 filtering has not been used. When L3 filtering is used, an additional delay can be expected.

9.2.5 Intrafrequency measurements without measurement gaps

9.2.5.1 Intrafrequency cell identification

The UE shall be able to identify a new detectable intra-frequency cell within $T_{identify_intra_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE is indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index}$. It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2.

$$T_{identify_intra_without_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra}) \text{ ms}$$

$$T_{identify_intra_with_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra} + T_{SSB_time_index_intra}) \text{ ms}$$

Where:

T_{PSS/SSS_sync_intra} : it is the time period used in PSS/SSS detection given in table 9.2.5.1-1, 9.2.5.1-2, 9.2.5.1-4 (deactivated SCell) or 9.2.5.1-5 (deactivated SCell)

$T_{SSB_time_index_intra}$: it is the time period used to acquire the index of the SSB being measured given in table 9.2.5.1-3 or 9.2.5.1-6 (deactivated SCell)

$T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement given in table 9.2.5.2-1, table 9.2.5.2-2 table 9.2.5.2-3 (deactivated SCell) or 9.2.5.2-4 (deactivated SCell)

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined

according to $CSSF_{outside_gap,i}$ in clause 9.1.5.1 for measurement conducted outside measurement gaps, i.e. when intra-frequency SMTC is fully non overlapping or partially overlapping with measurement gaps, or according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps, i.e. when intra-frequency SMTC is fully overlapping with measurement gaps.

if the high layer in TS 38.331 [2] signalling of *smtc2* is configured, the assumed periodicity of intra-frequency SMTC occasions corresponds to the value of higher layer parameter *smtc2*; Otherwise the assumed periodicity of intra-frequency SMTC occasions corresponds to the value of higher layer parameter *smtc1*.

$M_{pss/sss_sync_w/o_gaps}$: For a UE supporting FR2 power class 1, $M_{pss/sss_sync_w/o_gaps}=40$. For a UE supporting power class 2, $M_{pss/sss_sync_w/o_gaps}=24$. For a UE supporting FR2 power class 3, $M_{pss/sss_sync_w/o_gaps}=24$. For a UE supporting FR2 power class 4, $M_{pss/sss_sync_w/o_gaps}=24$

$M_{meas_period_w/o_gaps}$: For a UE supporting power class 1, $M_{meas_period_w/o_gaps}=40$. For a UE supporting FR2 power class 2, $M_{meas_period_w/o_gaps}=24$. For a UE supporting power class 3, $M_{meas_period_w/o_gaps}=24$. For a UE supporting power class 4, $M_{meas_period_w/o_gaps}=24$.

When intra-frequency SMTC is fully non overlapping with measurement gaps or intra-frequency SMTC is fully overlapping with MGs, $K_p=1$

When intra-frequency SMTC is partially overlapping with measurement gaps, $K_p = 1/(1 - (\text{SMTC period} / \text{MGRP}))$, where SMTC period < MGRP

If the higher layer signaling in TS38.331 [2] signalling of *smtc2* is present and *smtc1* is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, requirements are not specified for $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$

For FR2,

$K_{layer1_measurement}=1$,

- if all of the reference signals configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap are not fully overlapped by intra-frequency SMTC occasions, or
- if all of the reference signal configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap and fully-overlapped by intra-frequency SMTC occasions are not overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols, given that *SSB-ToMeasure* and *SS-RSSI-Measurement* are configured, where SSB symbols are indicated by *SSB-ToMeasure* and RSSI symbols are indicated by *SS-RSSI-Measurement*;

$K_{\text{layer1_measurement}}=1.5$, otherwise.

If SCG DRX is in use, intrafrequency cell identification requirements specified in Table 9.2.5.1-1, Table 9.2.5.1-2, Table 9.2.5.1-3, Table 9.2.5.1-4, Table 9.2.5.1-5 and Table 9.2.5.1-6 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

Table 9.2.5.1-1: Time period for PSS/SSS detection, (Frequency range FR1)

| DRX cycle | $T_{\text{PSS/SSS_sync_intra}}$ |
|---|--|
| No DRX | $\max(600\text{ms}, \text{ceil}(5 \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{intra}}$ |
| DRX cycle $\leq 320\text{ms}$ | $\max(600\text{ms}, \text{ceil}(1.5 \times 5 \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$ |
| DRX cycle $> 320\text{ms}$ | $\text{ceil}(5) \times K_p \times \text{DRX cycle} \times \text{CSSF}_{\text{intra}}$ |
| NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified | |

Table 9.2.5.1-2: Time period for PSS/SSS detection, (Frequency range FR2)

| DRX cycle | $T_{\text{PSS/SSS_sync_intra}}$ |
|---|--|
| No DRX | $\max(600\text{ms}, \text{ceil}(M_{\text{pss/sss_sync_w/o_gaps}} \times K_p \times K_{\text{layer1_measurement}}) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{intra}}$ |
| DRX cycle $\leq 320\text{ms}$ | $\max(600\text{ms}, \text{ceil}(1.5 \times M_{\text{pss/sss_sync_w/o_gaps}} \times K_p \times K_{\text{layer1_measurement}}) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$ |
| DRX cycle $> 320\text{ms}$ | $\text{ceil}(M_{\text{pss/sss_sync_w/o_gaps}} \times K_p \times K_{\text{layer1_measurement}}) \times \text{DRX cycle} \times \text{CSSF}_{\text{intra}}$ |
| NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified | |

Table 9.2.5.1-3: Time period for time index detection (FR1)

| DRX cycle | $T_{\text{SSB_time_index_intra}}$ |
|---|--|
| No DRX | $\max(120\text{ms}, \text{ceil}(3 \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{intra}}$ |
| DRX cycle $\leq 320\text{ms}$ | $\max(120\text{ms}, \text{ceil}(1.5 \times 3 \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$ |
| DRX cycle $> 320\text{ms}$ | $\text{Ceil}(3 \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{\text{intra}}$ |
| NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified | |

Table 9.2.5.1-4: Time period for PSS/SSS detection, deactivated SCell (FR1)

| DRX cycle | $T_{\text{PSS/SSS_sync_intra}}$ |
|-------------------------------|---|
| No DRX | $5 \times \text{measCycleSCell} \times \text{CSSF}_{\text{intra}}$ |
| DRX cycle $\leq 320\text{ms}$ | $5 \times \max(\text{measCycleSCell}, 1.5 \times \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$ |
| DRX cycle $> 320\text{ms}$ | $5 \times \max(\text{measCycleSCell}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$ |

Table 9.2.5.1-4: Time period for PSS/SSS detection, deactivated SCell (FR1)

| DRX cycle | T_{PSS/SSS_sync_intra} |
|------------------------|---|
| No DRX | $M_{pss/sss_sync_w/o_gaps} \times measCycleSCell \times CSSF_{intra}$ |
| DRX cycle $\leq 320ms$ | $M_{pss/sss_sync_w/o_gaps} \times \max(measCycleSCell, 1.5 \times DRX\ cycle) \times CSSF_{intra}$ |
| DRX cycle $> 320ms$ | $M_{pss/sss_sync_w/o_gaps} \times \max(measCycleSCell, DRX\ cycle) \times CSSF_{intra}$ |

Table 9.2.5.1-6: Time period for time index detection, deactivated SCell (FR1)

| DRX cycle | $T_{SSB_time_index_intra}$ |
|------------------------|--|
| No DRX | $3 \times measCycleSCell \times CSSF_{intra}$ |
| DRX cycle $\leq 320ms$ | $3 \times \max(measCycleSCell, 1.5 \times DRX\ cycle) \times CSSF_{intra}$ |
| DRX cycle $> 320ms$ | $3 \times \max(measCycleSCell, DRX\ cycle) \times CSSF_{intra}$ |

Table 9.2.5.1-7: Void**Table 9.2.5.1-8: Void**

9.2.5.2 Measurement period

The measurement period for intrafrequency measurements without gaps is as shown in table 9.2.5.2-1, 9.2.5.2-2, 9.2.5.2-3 (deactivated SCell) or 9.2.5.2-4(deactivated SCell). If the higher layer signaling in TS38.331 [2] signalling of *smtc2* is present and *smtc1* is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, requirements are not specified for $T_{SSB_measurement_period_intra}$

If SCG DRX is in use, intrafrequency measurement period requirements specified in Table 9.2.5.2-1, Table 9.2.5.2-2, Table 9.2.5.2-3 and Table 9.2.5.2-4 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

Table 9.2.5.2-1: Measurement period for intrafrequency measurements without gaps(FR1)

| DRX cycle | $T_{SSB_measurement_period_intra}$ |
|---|---|
| No DRX | $\max(200ms, \text{ceil}(5 \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times CSSF_{intra}$ |
| DRX cycle $\leq 320ms$ | $\max(200ms, \text{ceil}(1.5 \times 5 \times K_p) \times \max(\text{SMTC period}, DRX\ cycle)) \times CSSF_{intra}$ |
| DRX cycle $> 320ms$ | $\text{ceil}(5 \times K_p) \times DRX\ cycle \times CSSF_{intra}$ |
| NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified | |

Table 9.2.5.2-2: Measurement period for intra-frequency measurements without gaps(FR2)

| DRX cycle | $T_{SSB_measurement_period_intra}$ |
|---|--|
| No DRX | $\max(400ms, \text{ceil}(M_{meas_period_w/o_gaps} \times K_p \times K_{layer1_measurement}) \times \text{SMTC period})^{\text{Note 1}} \times CSSF_{intra}$ |
| DRX cycle $\leq 320ms$ | $\max(400ms, \text{ceil}(1.5 \times M_{meas_period_w/o_gaps} \times K_p \times K_{layer1_measurement}) \times \max(\text{SMTC period}, DRX\ cycle)) \times CSSF_{intra}$ |
| DRX cycle $> 320ms$ | $\text{ceil}(M_{meas_period_w/o_gaps} \times K_p \times K_{layer1_measurement}) \times DRX\ cycle \times CSSF_{intra}$ |
| NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified | |

Table 9.2.5.2-3: Measurement period for intra-frequency measurements without gaps (deactivated SCell) (FR1)

| DRX cycle | $T_{SSB_measurement_period_intra}$ |
|------------------------|--|
| No DRX | $5 \times measCycleSCell \times CSSF_{intra}$ |
| DRX cycle $\leq 320ms$ | $5 \times \max(measCycleSCell, 1.5 \times DRX\ cycle) \times CSSF_{intra}$ |
| DRX cycle $> 320ms$ | $5 \times \max(measCycleSCell, DRX\ cycle) \times CSSF_{intra}$ |

Table 9.2.5.2-4: Measurement period for intra-frequency measurements without gaps (deactivated SCell) FR2)

| DRX cycle | $T_{SSB_measurement_period_intra}$ |
|------------------------|--|
| No DRX | $M_{meas_period_w/o_gaps} \times measCycleSCell \times CSSF_{intra}$ |
| DRX cycle $\leq 320ms$ | $M_{meas_period_w/o_gaps} \times \max(measCycleSCell, 1.5 \times DRX\ cycle) \times CSSF_{intra}$ |
| DRX cycle $> 320ms$ | $M_{meas_period_w/o_gaps} \times \max(measCycleSCell, DRX\ cycle) \times CSSF_{intra}$ |

9.2.5.3 Scheduling availability of UE during intra-frequency measurements

UE are required to be capable of measuring without measurement gaps when the SSB is completely contained in the active bandwidth part of the UE. When any of the conditions in the following clauses is met, there are restrictions on the scheduling availability; otherwise, there is no scheduling restriction. Note that the SSB symbols to be measured in the following clauses are the SSB symbols indicated by *SSB-ToMeasure* [2], if it is configured; otherwise, all *L* SSB symbols within SMTC window duration defined in clause 4.1 of TS 38.213 [3] are included.

9.2.5.3.1 Scheduling availability of UE performing measurements in TDD bands on FR1

When the UE performs intra-frequency measurements in a TDD band, the following restrictions apply due to SS-RSRP or SS-SINR measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration. If the high layer in TS 38.331 [2] signalling of *smtc2* is configured, the SMTC periodicity follows *smtc2*; Otherwise SMTC periodicity follows *smtc1*.

When the UE performs intra-frequency measurements in a TDD band, the following restrictions apply due to SS-RSRQ measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration. If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*

When TDD intra-band carrier aggregation is performed, the scheduling restrictions due to a given serving cell should also apply to all other serving cells in the same band on the symbols that fully or partially overlap with aforementioned restricted symbols.

9.2.5.3.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UE which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to SS-RSRP/RSRQ/SINR measurement

- If *deriveSSB_IndexFromCell* is enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration. If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

- If *deriveSSB_IndexFromCell* is not enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on all symbols within SMTC window duration. If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

When intra-band carrier aggregation is performed, the scheduling restrictions due to a given serving cell should also apply to all other serving cells in the same band on the symbols that fully or partially overlap with aforementioned restricted symbols.

9.2.5.3.3 Scheduling availability of UE performing measurements on FR2

The following scheduling restriction applies due to SS-RSRP or SS-SINR measurement on an FR2 intra-frequency cell

The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration (The signaling *deriveSSB_IndexFromCell* is always enabled for FR2). If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

The following scheduling restriction applies to SS-RSRQ measurement on an FR2 intra-frequency cell

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration (The signaling *deriveSSB_IndexFromCell* is always enabled for FR2). If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

When intra-band carrier aggregation is performed, the scheduling restrictions due to a given serving cell should also apply to all other serving cells in the same band on the symbols that fully or partially overlap with aforementioned restricted symbols.

If following conditions are met:

- The UE has been notified about system information update through paging,
- The gap between the UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, the UE is expected to receive the PDCCH that the UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, the UE is expected to receive PDSCH that corresponds to the PDCCH that the UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured.

9.2.5.3.4 Scheduling availability of UE performing measurements on FR1 or FR2 in case of FR1-FR2 inter-band CA

There are no scheduling restrictions on FR1 serving cell(s) due to measurements performed on FR2 serving cell frequency layer.

There are no scheduling restrictions on FR2 serving cell(s) due to measurements performed on FR1 serving cell frequency layer.

9.2.5.4 SFTD Measurements between PCell and PSCell

9.2.5.4.1 Introduction

This clause contains SFTD measurement requirements for UE which supports NR-DC and is configured with a PSCell in RRC_CONNECTED state. The UE shall perform SFTD measurement between PCell and PSCell, and report the SFTD result with/without SS-RSRP after the network requests with *reportType* for the associated *reportConfig* set to

reportSFTD. The overall delay includes RRC procedure delay defined in clause 12 in TS 38.331 [2], and SFTD measurement reporting delay in clause 9.2.5.4.3.

9.2.5.4.2 SFTD Measurement delay

When no DRX is used in either of PCell and PSCell, the physical layer measurement period of the SFTD measurement shall be $T_{\text{measure_SFTD1}} = \max(200, 5 \times \text{SMTC period})$ ms, where the SMTC period refers to the maximum between the configured SMTC period in PCell and PSCell.

When DRX is used in either of the PCell or the PSCell, or in both PCell and PSCell, the physical layer measurement period ($T_{\text{measure_SFTD1}}$) of the SFTD measurement shall be as specified in Table 9.2.5.4.2-1.

Table 9.2.5.4.2-1: SFTD measurement requirement when DRX is used

| DRX cycle length (s) ^{Note 3} | $T_{\text{measure_SFTD1}}$ (s) |
|--|---|
| ≤ 0.04 | $\max(0.2, 5 \times \text{SMTC period})$ (Note2) |
| $0.04 < \text{DRX cycle} \leq 0.32$ | $8 \times \max(\text{DRX cycle}, \text{SMTC period})$ |
| $0.32 < \text{DRX cycle} \leq 10.24$ | $5 \times \text{DRX cycle}$ |
| Note 1: SMTC period in this table refers to the maximum between the configured SMTC period in PCell and PSCell. Note 2: Number of DRX cycles depends upon the DRX cycle in use Note 3: DRX cycle length in this table refers to the DRX cycle length configured for PCell or PSCell. When DRX is used in both PCell and PSCell, DRX cycle length in this table refers to the longer of the DRX cycle lengths for PCell and PSCell. | |

If PSCell is changed without changing carrier frequency of PSCell, while the UE is performing SFTD measurements, the UE shall still meet SFTD measurement and accuracy requirements for the new PSCell. In this case the UE shall restart the SFTD measurement, and the total physical layer measurement period shall not exceed $T_{\text{measure_SFTD2}}$ as defined by the following expression:

$$T_{\text{measure_SFTD2}} = (M+1) \cdot (T_{\text{measure_SFTD1}}) + M \cdot T_{\text{PSCell_change_NRDC}}$$

where:

M is the number of times the NR PSCell is changed over the measurement period ($T_{\text{measure_SFTD2}}$), and

$T_{\text{PSCell_change_NRDC}}$ is the time necessary to change the PSCell; it can be up to 25 ms.

If PCell is changed, or if PSCell is changed with different carrier frequency from PSCell, the UE shall terminate SFTD measurements.

The measurement accuracy for the SFTD measurement when DRX is used as well as when no DRX is used shall be as specified in the sub-clause 10.1.21.

9.2.5.4.3 SFTD Measurement Reporting Delay

The SFTD measurement reporting delay is defined as the time between a command that will trigger an SFTD measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{\text{DCCH}}$. This measurement reporting delay excludes any delay caused by no UL resources available for UE to send the measurement report.

The SFTD measurement reporting delay shall be less than measurement period defined in clause 9.2.5.4.2 plus the RRC procedure delay defined in TS 38.331 [2].

9.2.6 Intra-frequency measurements with measurement gaps

9.2.6.1 Void

9.2.6.2 Intra-frequency cell identification

The UE shall be able to identify a new detectable intra-frequency cell within $T_{\text{identify_intra_without_index}}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRSIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE has been indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{\text{identify_intra_with_index}}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{\text{identify_intra_without_index}}$. It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2.

$$T_{\text{identify_intra_without_index}} = T_{\text{PSS/SSS_sync_intra}} + T_{\text{SSB_measurement_period_intra}} \text{ ms}$$

$$T_{\text{identify_intra_with_index}} = T_{\text{PSS/SSS_sync_intra}} + T_{\text{SSB_measurement_period_intra}} + T_{\text{SSB_time_index_intra}}$$

Where:

$T_{\text{PSS/SSS_sync_intra}}$: it is the time period used in PSS/SSS detection given in table 9.2.6.2-1 or 9.2.6.2-2.

$T_{\text{SSB_time_index_intra}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.2.6.2-3.

$T_{\text{SSB_measurement_period_intra}}$: equal to a measurement period of SSB based measurement given in table 9.2.6.3-1 or 9.2.6.3-2.

$\text{CSSF}_{\text{intra}}$: it is a carrier specific scaling factor and is determined according to $\text{CSSF}_{\text{within_gap},i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.

$M_{\text{pss/sss_sync_with_gaps}}$: For a UE supporting FR2 power class 1, $M_{\text{pss/sss_sync_with_gaps}}=40$. For a UE supporting FR2 power class 2, $M_{\text{pss/sss_sync_with_gaps}}=24$. For a UE supporting FR2 power class 3, $M_{\text{pss/sss_sync_with_gaps}}=24$. For a UE supporting power class 4, $M_{\text{pss/sss_sync_with_gaps}}=24$

$M_{\text{meas_period_with_gaps}}$: For a UE supporting power class 1, $M_{\text{meas_period_with_gaps}}=40$. For a UE supporting power class 2, $M_{\text{meas_period_with_gaps}}=24$. For a UE supporting power class 3, $M_{\text{meas_period_with_gaps}}=24$. For a UE supporting power class 4, $M_{\text{meas_period_with_gaps}}=24$.

If the higher layer signaling in TS 38.331 [2] of *smtc2* is present and *smtc1* is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, requirements are not specified for $T_{\text{identify_intra_without_index}}$ OR $T_{\text{identify_intra_with_index}}$.

If SCG DRX is in use, intra-frequency cell identification requirements specified in Table 9.2.6.2-1, Table 9.2.6.2-2, and Table 9.2.6.2-3 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

Table 9.2.6.2-1: Time period for PSS/SSS detection (FR1)

| DRX cycle | $T_{\text{PSS/SSS_sync_intra}}$ |
|--------------------------------------|--|
| No DRX | $\max(600\text{ms}, 5 \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{intra}}$ |
| $\text{DRX cycle} \leq 320\text{ms}$ | $\max(600\text{ms}, \text{ceil}(1.5 \times 5) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$ |
| $\text{DRX cycle} > 320\text{ms}$ | $5 \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$ |

Table 9.2.6.2-2: Time period for PSS/SSS detection (FR2)

| DRX cycle | $T_{\text{PSS/SSS_sync_intra}}$ |
|--------------------------------------|---|
| No DRX | $\max(600\text{ms}, M_{\text{pss/sss_sync_with_gaps}} \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{intra}}$ |
| $\text{DRX cycle} \leq 320\text{ms}$ | $\max(600\text{ms}, \text{ceil}(1.5 \times M_{\text{pss/sss_sync_with_gaps}}) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$ |
| $\text{DRX cycle} > 320\text{ms}$ | $M_{\text{pss/sss_sync_with_gaps}} \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$ |

Table 9.2.6.2-3: Time period for time index detection (FR1)

| DRX cycle | $T_{\text{SSB_time_index_intra}}$ |
|--------------------------------------|--|
| No DRX | $\max(120\text{ms}, 3 \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{intra}}$ |
| $\text{DRX cycle} \leq 320\text{ms}$ | $\max(120\text{ms}, \text{ceil}(1.5 \times 3) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$ |
| $\text{DRX cycle} > 320\text{ms}$ | $3 \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$ |

Table 9.2.6.2-7: Void**Table 9.2.6.2-8: Void**

9.2.6.3 Intra-frequency Measurement Period

The measurement period for FR1 intra-frequency measurements with gaps is as shown in table 9.2.6.3-1.

The measurement period for FR2 intra-frequency measurements with gaps is as shown in table 9.2.6.3-2.

If SCG DRX is in use, intra-frequency measurement period requirements specified in Table 9.2.6.3-1 and Table 9.2.6.3-2, shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

Table 9.2.6.3-1: Measurement period for intra-frequency measurements with gaps(FR1)

| DRX cycle | $T_{\text{SSB_measurement_period_intra}}$ |
|--------------------------------------|--|
| No DRX | $\max(200\text{ms}, 5 \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{intra}}$ |
| $\text{DRX cycle} \leq 320\text{ms}$ | $\max(200\text{ms}, \text{ceil}(1.5 \times 5) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$ |
| $\text{DRX cycle} > 320\text{ms}$ | $5 \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$ |

Table 9.2.6.3-2: Measurement period for intra-frequency measurements with gaps(FR2)

| DRX cycle | $T_{\text{SSB_measurement_period_intra}}$ |
|--------------------------------------|--|
| No DRX | $\max(400\text{ms}, M_{\text{meas_period_with_gaps}} \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{intra}}$ |
| $\text{DRX cycle} \leq 320\text{ms}$ | $\max(400\text{ms}, \text{ceil}(1.5 \times M_{\text{meas_period_with_gaps}}) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$ ^{Note 1} |
| $\text{DRX cycle} > 320\text{ms}$ | $M_{\text{meas_period_with_gaps}} \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$ |

9.3 NR inter-frequency measurements

9.3.1 Introduction

A measurement is defined as an SSB based inter-frequency measurement provided it is not defined as an intra-frequency measurement according to clause 9.2.

The UE shall be able to identify new inter-frequency cells and perform SS-RSRP, SS-RSRQ, and SS-SINR measurements of identified inter-frequency cells if carrier frequency information is provided by PCell or PSCell, even if no explicit neighbour list with physical layer cell identities is provided.

SSB based measurements are configured along with a measurement timing configuration (SMTC) per carrier, which provides periodicity, duration and offset information on a window of up to 5ms where the measurements on the configured inter-frequency carrier are to be performed. For inter-frequency connected mode measurements, one measurement window periodicity may be configured per inter-frequency measurement object.

When measurement gaps are needed, the UE is not expected to detect SSB on an inter-frequency measurement object which starts earlier than the gap starting time + switching time, nor detect SSB which ends later than the gap end – switching time. When the inter-frequency cells are in FR2 and the per-FR gap is configured to the UE in EN-DC, SA NR, NE-DC and NR-DC, or the serving cells are in FR2, the inter-frequency cells are in FR2 and the per-UE gap is configured to the UE in SA NR and NR-DC, the switching time is 0.25ms. Otherwise the switching time is 0.5ms.

9.3.2 Requirements applicability

The requirements in clause 9.3 apply, provided:

- The cell being identified or measured is detectable.

An inter-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in clauses 10.1.4 and 10.1.5 for FR1 and FR2, respectively, for a corresponding Band,
- SS-RSRQ related side conditions given in clauses 10.1.9 and 10.1.10 for FR1 and FR2, respectively, for a corresponding Band,
- SS-SINR related side conditions given in clauses 10.1.14 and 10.1.15 for FR1 and FR2, respectively, for a corresponding Band,
- SSB_{RP} and SSB \hat{E}_s/I_{ot} according to Annex B.2.3 for a corresponding Band.

9.3.2.1 Void

9.3.2.2 Void

9.3.3 Number of cells and number of SSB

9.3.3.1 Requirements for FR1

For each inter-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 4 identified cells, and
- 7 SSBs with different SSB index and/or PCI on the inter-frequency layer.

9.3.3.2 Requirements for FR2

For each inter-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 4 identified cells, and
- 10 SSBs with different SSB index and/or PCI on the inter-frequency layer, and
- 1 SSB per identified cell.

9.3.4 Inter-frequency cell identification

When measurement gaps are provided, or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable inter frequency cell within $T_{\text{identify_inter_without_index}}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRSIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{\text{identify_inter_with_index}}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{\text{identify_inter_without_index}}$.

$$T_{\text{identify_inter_without_index}} = (T_{\text{PSS/SSS_sync_inter}} + T_{\text{SSB_measurement_period_inter}}) \text{ ms}$$

$$T_{\text{identify_inter_with_index}} = (T_{\text{PSS/SSS_sync_inter}} + T_{\text{SSB_measurement_period_inter}} + T_{\text{SSB_time_index_inter}}) \text{ ms}$$

Where:

$T_{\text{PSS/SSS_sync_inter}}$: it is the time period used in PSS/SSS detection given in table 9.3.4-1 and table 9.3.4-2.

$T_{\text{SSB_time_index_inter}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3.4-3 and table 9.3.4-4.

$T_{\text{SSB_measurement_period_inter}}$: equal to a measurement period of SSB based measurement given in table 9.3.5-1 and table 9.3.5-2.

$M_{\text{pss/sss_sync_inter}}$: For a UE supporting FR2 power class 1, $M_{\text{pss/sss_sync_inter}} = 64$ samples. For a UE supporting FR2 power class 2, $M_{\text{pss/sss_sync_inter}} = 40$ samples. For a UE supporting FR2 power class 3, $M_{\text{pss/sss_sync_inter}} = 40$ samples. For a UE supporting FR2 power class 4, $M_{\text{pss/sss_sync_inter}} = 40$ samples.

$M_{\text{SSB_index_inter}}$: For a UE supporting FR2 power class 1, $M_{\text{SSB_index_inter}} = 40$ samples. For a UE supporting FR2 power class 2, $M_{\text{SSB_index_inter}} = 24$ samples. For a UE supporting FR2 power class 3, $M_{\text{SSB_index_inter}} = 24$ samples. For a UE supporting FR2 power class 4, $M_{\text{SSB_index_inter}} = 24$ samples.

$M_{\text{meas_period_inter}}$: For a UE supporting FR2 power class 1, $M_{\text{meas_period_inter}} = 64$ samples. For a UE supporting FR2 power class 2, $M_{\text{meas_period_inter}} = 40$ samples. For a UE supporting FR2 power class 3, $M_{\text{meas_period_inter}} = 40$ samples. For a UE supporting FR2 power class 4, $M_{\text{meas_period_inter}} = 40$ samples.

$\text{CSSF}_{\text{inter}}$: it is a carrier specific scaling factor and is determined according to $\text{CSSF}_{\text{within_gap},i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.

Table 9.3.4-1: Time period for PSS/SSS detection, (Frequency range FR1)

| Condition ^{NOTE1,2} | $T_{\text{PSS/SSS_sync_inter}}$ |
|--|--|
| No DRX | $\text{Max}(600\text{ms}, 8 \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{inter}}$ |
| DRX cycle $\leq 320\text{ms}$ | $\text{Max}(600\text{ms}, \text{Ceil}(8 \times 1.5) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter}}$ |
| DRX cycle $> 320\text{ms}$ | $8 \times \text{DRX cycle} \times \text{CSSF}_{\text{inter}}$ |
| NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 | |
| NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. | |

Table 9.3.4-2: Time period for PSS/SSS detection, (Frequency range FR2)

| Condition ^{NOTE1,2} | $T_{\text{PSS/SSS_sync_inter}}$ |
|--|---|
| No DRX | $\text{Max}(600\text{ms}, M_{\text{pss/sss_sync_inter}} \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{inter}}$ |
| DRX cycle $\leq 320\text{ms}$ | $\text{Max}(600\text{ms}, (1.5 \times M_{\text{pss/sss_sync_inter}}) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter}}$ |
| DRX cycle $> 320\text{ms}$ | $M_{\text{pss/sss_sync_inter}} \times \text{DRX cycle} \times \text{CSSF}_{\text{inter}}$ |
| NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 | |
| NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. | |

Table 9.3.4-3: Time period for time index detection (Frequency range FR1)

| Condition ^{NOTE1,2} | $T_{SSB_time_index_inter}$ |
|--|---|
| No DRX | $\text{Max}(120\text{ms}, 3 \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{inter}$ |
| DRX cycle $\leq 320\text{ms}$ | $\text{Max}(120\text{ms}, \text{Ceil}(3 \times 1.5) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{inter}$ |
| DRX cycle $> 320\text{ms}$ | $3 \times \text{DRX cycle} \times \text{CSSF}_{inter}$ |
| NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 | |
| NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. | |

Table 9.3.4-4: Time period for time index detection (Frequency range FR2)

| Condition ^{NOTE1,2} | $T_{SSB_time_index_inter}$ |
|--|--|
| No DRX | $\text{Max}(200\text{ms}, M_{SSB_index_inter} \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{inter}$ |
| DRX cycle $\leq 320\text{ms}$ | $\text{Max}(200\text{ms}, (1.5 \times M_{SSB_index_inter}) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{inter}$ |
| DRX cycle $> 320\text{ms}$ | $M_{SSB_index_inter} \times \text{DRX cycle} \times \text{CSSF}_{inter}$ |
| NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 | |
| NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. | |

9.3.4.1 Void

9.3.4.2 Void

9.3.5 Inter-frequency measurements

When measurement gaps are provided for inter frequency measurements, or the UE supports capability of conducting such measurements without gaps, the UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in sub-clauses 10.1.4, 10.1.5, 10.1.9, 10.1.10, 10.1.14 and 10.1.15, respectively, as shown in table 9.3.5-1 and 9.3.5-2:

Table 9.3.5-1: Measurement period for inter-frequency measurements with gaps (Frequency FR1)

| Condition ^{NOTE1,2} | $T_{SSB_measurement_period_inter}$ |
|--|---|
| No DRX | $\text{Max}(200\text{ms}, 8 \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{inter}$ |
| DRX cycle $\leq 320\text{ms}$ | $\text{Max}(200\text{ms}, \text{Ceil}(8 \times 1.5) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{inter}$ |
| DRX cycle $> 320\text{ms}$ | $8 \times \text{DRX cycle} \times \text{CSSF}_{inter}$ |
| NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 | |
| NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. | |

Table 9.3.5-2: Measurement period for inter-frequency measurements with gaps (Frequency FR2)

| Condition ^{NOTE1,2} | $T_{SSB_measurement_period_inter}$ |
|--|--|
| No DRX | $\text{Max}(400\text{ms}, M_{meas_period_inter} \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{inter}$ |
| DRX cycle $\leq 320\text{ms}$ | $\text{Max}(400\text{ms}, (1.5 \times M_{meas_period_inter}) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{inter}$ |
| DRX cycle $> 320\text{ms}$ | $M_{meas_period_inter} \times \text{DRX cycle} \times \text{CSSF}_{inter}$ |
| NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 | |
| NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. | |

9.3.5.1 Void

9.3.5.2 Void

9.3.5.3 Void

9.3.6 Inter-frequency measurements reporting requirements

9.3.6.1 Periodic Reporting

Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.4.1, 10.1.5.1, 10.1.9.1, 10.1.10.1, 10.1.14.1 and 10.1.15.1, respectively.

9.3.6.2 Event-triggered Periodic Reporting

Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered periodic measurement reports shall meet the requirements in clauses 10.1.4.1, 10.1.5.1, 10.1.9.1, 10.1.10.1, 10.1.14.1 and 10.1.15.1, respectively.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.3.6.3.

9.3.6.3 Event-triggered Reporting

Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered measurement reports shall meet the requirements in clauses 10.1.4.1, 10.1.5.1, 10.1.9.1, 10.1.10.1, 10.1.14.1 and 10.1.15.1, respectively.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be within $T_{\text{identify_inter_without_index}}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index. Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{\text{identify_inter_with_index}}$. Both $T_{\text{identify_inter_without_index}}$ and $T_{\text{identify_inter_with_index}}$ are defined in clause 9.3.4. When L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSB measured from the cell being configured remains detectable during the time period $T_{\text{identify_inter_without_index}}$ or $T_{\text{identify_inter_with_index}}$ defined in clause 9.3.4. If a cell which has been detectable at least for the time period $T_{\text{identify_inter_without_index}}$ or $T_{\text{identify_inter_with_index}}$ defined in clause 9.3.4 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again with the same spatial reception parameter and then triggers the measurement report as per TS 38.331 [2], the event triggered measurement reporting delay shall be less than $T_{\text{SSB_measurement_period_inter}}$ defined in clause 9.3.5 provided the timing to that cell has not changed more than $\pm 3200 T_c$ while measurement gap has not been available and the L3 filtering has not been used. When L3 filtering is used an additional delay can be expected.

9.3.7 Void

9.3.8 Inter-frequency SFTD measurement requirements

9.3.8.1 Introduction

This clause contains requirements for a UE supporting NR inter-frequency SFTD measurement and is applicable in RRC_CONNECTED state. The UE shall, depending on network request, perform inter-frequency SFTD measurement

and report SFTD result with or without SS-RSRP. The overall delay includes RRC procedure delay defined in clause 12 in TS 38.331 [2] and SFTD measurement reporting delay in clause 9.3.8.3.

UE which fulfils the requirements in clause 9.3.8 is not supposed to fulfil the requirements defined in clause 9.2.5.4.

9.3.8.2 SFTD Measurement delay

The requirements on SFTD measurement delay defined in this clause are applicable under the side condition $\hat{E}_s/I_{ot} \geq -3$ dB for the inter-frequency neighbour cell. Depending on configuration, the SFTD measurement may be carried out with or without the support of configured measurement gaps. In the current release, indication on whether to carry out the SFTD measurement with or without measurement gaps is implicit and depending on whether measurement gaps are configured.

The UE shall be able to detect, identify and measure SFTD of up to 3 of the strongest applicable inter-frequency neighbour cells on the carrier frequency provided in the SFTD measurement configuration. Further depending on the SFTD measurement configuration, the UE shall additionally report SS-RSRP for the one or more strongest cells. The UE may or may not be configured with *cellsForWhichToReportSFTD*. The UE does not expect *cellsForWhichToReportSFTD* to change during an ongoing SFTD measurement.

When no measurement gaps are provided, the UE shall be capable of finding the inter-frequency neighbour cell regardless of its SSB position in the SMTC period, provided that the carrier frequency where SFTD measurement is configured and the serving carrier(s) form a supported CA or NR-DC band combination of the UE. The SFTD measurement shall be conducted with sustained connection to the PCell and activated SCell(s) in MCG. Depending on capability, the UE may be allowed to cause a certain amount of interruptions for reconfiguration of the radio receiver, as specified in clause 8.2.2.2.6.

When measurement gaps are provided, the UE shall be capable of finding the inter-frequency neighbour cell under the additional condition that the SSB at least occasionally falls within the measurement gap.

When no DRX is used, the UE shall be capable of determining SFTD within a physical layer measurement period of $T_{\text{measure_SFTD1}}$ as follows:

- For SFTD measurements without measurement gaps, and without additional SS-RSRP reporting:
 - For carrier frequency in FR1: $T_{\text{measure_SFTD1}} = 14$ SMTC periods
 - For carrier frequency in FR2: $T_{\text{measure_SFTD1}} = 112$ SMTC periods
- For SFTD measurements in measurement gaps, and without additional SS-RSRP reporting:
 - For carrier frequency in FR1: $T_{\text{measure_SFTD1}} = \text{CSSF}_{\text{inter}} \times 8 \times \text{Max}(\text{MGRP}, \text{SMTC period})$
 - For carrier frequency in FR2: $T_{\text{measure_SFTD1}} = \text{CSSF}_{\text{inter}} \times 64 \times \text{Max}(\text{MGRP}, \text{SMTC period})$
- For SFTD measurements without measurement gaps, and with additional SS-RSRP reporting:
 - For carrier frequency in FR1: $T_{\text{measure_SFTD1}} = 19$ SMTC periods
 - For carrier frequency in FR2: $T_{\text{measure_SFTD1}} = 152$ SMTC periods
- For SFTD measurements in measurement gaps, and with additional SS-RSRP reporting:
 - For carrier frequency in FR1: $T_{\text{measure_SFTD1}} = \text{CSSF}_{\text{inter}} \times 13 \times \text{Max}(\text{MGRP}, \text{SMTC period})$
 - For carrier frequency in FR2: $T_{\text{measure_SFTD1}} = \text{CSSF}_{\text{inter}} \times 104 \times \text{Max}(\text{MGRP}, \text{SMTC period})$

where $\text{CSSF}_{\text{inter}}$ is a carrier specific scaling factor and is determined according to $\text{CSSF}_{\text{within_gap},i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.

When DRX is used, the same $T_{\text{measure_SFTD1}}$ as for non-DRX applies, but the reporting delay depends on the DRX cycle length in use.

In case PCell is changed due to handover, the UE shall terminate the inter-frequency SFTD measurement.

The measurement accuracy for the SFTD measurement shall fulfil the requirement in clause 10.1.21.3. The measurement accuracy for additionally reported SS-RSRP shall fulfil the requirement in clauses 10.1.4.1 and 10.1.5.1 for neighbour cell in FR1 and FR2, respectively.

9.3.8.3 SFTD Measurement reporting delay

The SFTD measurement reporting delay is defined as the time between a command that will trigger an SFTD measurement report and the point when the UE starts to transmit the measurement report over the air interface, excluding the RRC procedure delay defined in TS 38.331 [2]. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty of $2 \times TTI_{DCCH}$ resulting when inserting the measurement report to the TTI of the uplink DCCH. This measurement reporting delay excludes any delay caused by lack of UL resources for UE to send the measurement report.

The SFTD measurement reporting delay shall be less than $T_{measure_SFTD1}$ defined in clause 9.3.8.2.

9.4 Inter-RAT measurements

9.4.1 Introduction

The requirements in this clause are specified for NR–E-UTRAN FDD and NR–E-UTRAN TDD measurements and are applicable without an explicit E-UTRAN neighbour cell list containing physical layer cell identities, for a UE:

- in RRC_CONNECTED state, and
- configured with SA or NR-DC operation mode or configured in NE-DC operation mode by PCell with NR–E-UTRAN FDD or TDD measurement (RSRP, RSRQ, RS-SINR, RSTD, or E-CID) on E-UTRA non-serving frequency carrier, and
- configured with an appropriate measurement gap pattern according to Table 9.1.2-3.

When the UE is in NE-DC operation mode and an NR–E-UTRAN FDD or TDD measurement (RSRP, RSRQ, RS-SINR, or E-CID) configured by NR PCell is on a E-UTRA serving frequency carrier, then the corresponding E-UTRA intra-frequency measurements requirements specified in clause 8.19 of TS 36.133 [15] shall apply.

Parameter T_{Inter1} used in inter-RAT requirements in clause 9.4 is specified in Table 9.4.1-1.

Table 9.4.1-1: Minimum available time for inter-RAT measurements

| Gap Pattern Id | Measurement Gap Length (MGL, ms) | Measurement Gap Repetition Period (MGRP, ms) | Minimum available time for inter-frequency and inter-RAT measurements during 480 ms period (T_{inter1} , ms) |
|----------------|----------------------------------|--|---|
| 0 | 6 | 40 | 60 |
| 1 | 6 | 80 | 30 |
| 2 | 3 | 40 | 24 ^{Note 1} |
| 3 | 3 | 80 | 12 ^{Note 1} |
| 4 | 6 | 20 | 120 ^{Note 1} |
| 6 | 4 | 20 | 72 ^{Note 1,3,6} |
| 7 | 4 | 40 | 36 ^{Note 1,4,6} |
| 8 | 4 | 80 | 18 ^{Note 1,5,6} |
| 10 | 3 | 20 | 48 ^{Note 1} |

NOTE 1: When determining UE requirements using T_{inter1} for gap pattern IDs 2, 3, 4, 6, 7, 8, 10, $T_{inter1} = 60$ for gap pattern IDs 2, 4, 6, 7, 10, and $T_{inter1} = 30$ for gap pattern IDs 3 and 8 shall be used.

NOTE 2: Measurement gaps pattern configurations applicability is as specified in Table 9.1.2-1.

NOTE 3: When this gap pattern is used, the T_{inter} for E-UTRA inter-frequency measurements is 48 ms corresponding to the first 3 ms of the 4 ms gap.

NOTE 4: When this gap pattern is used, the T_{inter} for E-UTRA inter-frequency measurements is 24 ms corresponding to the first 3 ms of the 4 ms gap.

NOTE 5: When this gap pattern is used, the T_{inter} for E-UTRA inter-frequency measurements is 12 ms corresponding to the first 3 ms of the 4 ms gap.

NOTE 6: This gap pattern is applicable for E-UTRA inter-frequency measurements only if gap based NR measurements are also configured.

A UE configured with gap pattern ID 2, 3 or 10 shall be able to detect a target cell, provided that

- the E-UTRA subframe #0 or #5 of the target E-UTRAN cell begins not earlier than 500 μ s from the start of the measurement gap, and
- the E-UTRA subframe #0 or #5 of the target E-UTRAN cell ends not later than 500 μ s before the end of the measurement gap in case of FDD and not later than 750 μ s before the end of measurement gap in case of TDD.

A UE configured with gap pattern ID 6, 7 or 8 shall be able to detect a target cell, provided that

- the E-UTRA subframe #0 or #5 of the target E-UTRAN cell begins not earlier than 500 μ s from the start of the measurement gap, and
- the E-UTRA subframe #0 or #5 of the target E-UTRAN cell ends no later than 1500 μ s before the end of the measurement gap in case of FDD and no later than 1750 μ s before the end of measurement gap in case of TDD.

9.4.2 NR – E-UTRAN FDD measurements

9.4.2.1 Introduction

The requirements are applicable for NR–E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements.

In the requirements, an E-UTRAN FDD cell is considered to be detectable when:

- RSRP related conditions in the accuracy requirements in clause 10.2.2 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],
- RSRQ related conditions in the accuracy requirements in clause 10.2.3 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],
- RS-SINR related conditions in the accuracy requirements in clause 10.2.5 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.19 of TS 36.133 [15].

9.4.2.2 Requirements when no DRX is used

When the UE requires measurement gaps to identify and measure inter-RAT cells and an appropriate measurement gap pattern is scheduled, the UE shall be able to identify a new detectable FDD cell within $T_{\text{Identify, E-UTRAN FDD}}$ according to the following expression:

$$T_{\text{Identify, E-UTRAN FDD}} = T_{\text{BasicIdentify}} \cdot \frac{480}{T_{\text{Inter1}}} \cdot \text{CSSF}_{\text{interRAT}} \quad \text{ms},$$

where:

$$T_{\text{BasicIdentify}} = 480 \text{ ms},$$

T_{Inter1} is defined in clause 9.4.1,

$\text{CSSF}_{\text{interRAT}} = \text{CSSF}_{\text{within_gap},i}$ is the scaling factor for the measured inter-RAT E-UTRA carrier i which is calculated as specified in clause 9.1.5.2.

Identification of a cell shall include detection of the cell and additionally performing a single measurement with measurement period of $T_{\text{Measure, E-UTRAN FDD}}$ defined in Table 9.4.2.2-1.

Table 9.4.2.2-1: Measurement period and measurement bandwidth

| Configuration | Physical Layer Measurement period: $T_{\text{Measure, E-UTRAN FDD}}$ [ms] | Measurement bandwidth [RB] |
|---|--|----------------------------|
| 0 | $480 \times \text{CSSF}_{\text{interRAT}}$ | 6 |
| 1 (Note 1) | $240 \times \text{CSSF}_{\text{interRAT}}$ | 50 |
| NOTE 1: This configuration is optional. | | |

The UE shall be capable of identifying and performing NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements of at least 4 identified E-UTRAN FDD cells per E-UTRA FDD carrier frequency layer during each layer 1 measurement period, for up to 7 E-UTRA FDD carrier frequency layers.

If higher layer filtering is used, an additional cell identification delay can be expected.

The NR – E-UTRAN FDD RSRP measurement accuracy for all measured cells shall be as specified in clause 10.2.2.

The NR – E-UTRAN FDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2.3.

The NR – E-UTRAN FDD RS-SINR measurement accuracy for all measured cells shall be as specified in clause 10.2.5.

9.4.2.3 Requirements when DRX is used

When DRX is in use and measurement gaps are configured, the UE shall be able to identify a new detectable E-UTRAN FDD cell within $T_{\text{Identify, E-UTRAN FDD}}$ specified in Table 9.4.2.3-1.

Table 9.4.2.3-1: Requirement to identify a newly detectable E-UTRAN FDD cell

| DRX cycle length (s) | $T_{\text{Identify, E-UTRAN FDD}}$ (s) (DRX cycles) | |
|--|--|--|
| | Gap period = 40 ms, 20 ms | Gap period = 80 ms |
| ≤ 0.16 | Non-DRX requirements in clause 9.4.2.2 apply | Non-DRX requirements in clause 9.4.2.2 apply |
| 0.256 | $5.12^* \text{CSSF}_{\text{interRAT}}$ ($20^* \text{CSSF}_{\text{interRAT}}$) | $7.68^* \text{CSSF}_{\text{interRAT}}$ ($30^* \text{CSSF}_{\text{interRAT}}$) |
| 0.32 | $6.4^* \text{CSSF}_{\text{interRAT}}$ ($20^* \text{CSSF}_{\text{interRAT}}$) | $7.68^* \text{CSSF}_{\text{interRAT}}$ ($24^* \text{CSSF}_{\text{interRAT}}$) |
| $0.32 < \text{DRX-cycle} \leq 10.24$ | Note1 ($20^* \text{CSSF}_{\text{interRAT}}$) | Note1 ($20^* \text{CSSF}_{\text{interRAT}}$) |
| NOTE 1: The time depends on the DRX cycle length. | | |
| NOTE 2: $\text{CSSF}_{\text{interRAT}}$ is as defined in clause 9.4.2.2. | | |

When DRX is in use, the UE shall be capable of performing NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements of at least 4 identified E-UTRAN FDD cells per E-UTRA FDD frequency layer during each layer 1 measurement period, for up to 7 E-UTRA FDD carrier frequency layers, and the UE physical layer shall be capable of

reporting NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements to higher layers with the measurement period $T_{\text{measure, E-UTRAN FDD}}$ specified in Table 9.4.2.3-2.

Table 9.4.2.3-2: Requirement to measure E-UTRAN FDD cells

| DRX cycle length (s) | $T_{\text{measure, E-UTRAN FDD}}$ (s) (DRX cycles) |
|--|--|
| ≤ 0.08 | Non-DRX requirements in clause 9.4.2.2 apply |
| $0.08 < \text{DRX-cycle} \leq 10.24$ | Note1 ($5 * \text{CSSF}_{\text{interRAT}}$) |
| NOTE 1: The time depends on the DRX cycle length. | |
| NOTE 2: $\text{CSSF}_{\text{interRAT}}$ is as defined in clause 9.4.2.2. | |

If higher layer filtering is used, an additional cell identification delay can be expected.

The NR – E-UTRAN FDD RSRP measurement accuracy for all measured cells shall be as specified in clause 10.2.2.

The NR – E-UTRAN FDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2.3.

The NR – E-UTRAN FDD RS-SINR measurement accuracy for all measured cells shall be as specified in clause 10.2.5.

9.4.2.4 Measurement reporting requirements

9.4.2.4.1 Periodic Reporting

The reported NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

9.4.2.4.2 Event-Triggered Periodic Reporting

The reported NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered periodic measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

The first report in event-triggered periodic measurement reporting shall meet the requirements specified in clause 9.4.2.4.3.

9.4.2.4.3 Event-Triggered Reporting

The reported NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

The UE shall not send any event-triggered measurement reports as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times \text{TTI}_{\text{DCCH}}$ where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{\text{Identify, E-UTRAN FDD}}$ defined in clauses 9.4.2.2 and 9.4.2.3 without DRX and with DRX, respectively. When L3 filtering is used, an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{\text{Identify, E-UTRAN FDD}}$ becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event as per TS 38.331 [2], the event triggered measurement reporting delay shall be less than $T_{\text{Measure, E-UTRAN FDD}}$ provided the timing to that cell has not changed more than $\pm 50 T_s$ while measurement gap has not been available and the L3 filter has not been used.

9.4.3 NR – E-UTRAN TDD measurements

9.4.3.1 Introduction

The requirements are applicable for NR–E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements.

In the requirements, an E-UTRAN TDD cell is considered to be detectable when:

- RSRP related conditions in the accuracy requirements in clause 10.2.2 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],
 - RSRQ related conditions in the accuracy requirements in clause 10.2.3 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],
- RS-SINR related conditions in the accuracy requirements in clause 10.2.5 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.19 of TS 36.133 [15].

9.4.3.2 Requirements when no DRX is used

When the UE requires measurement gaps to identify and measure inter-RAT cells and an appropriate measurement gap pattern is scheduled, the UE shall be able to identify a new detectable TDD cell within $T_{\text{Identify, E-UTRAN TDD}}$ according to the following expression:

- When configuration 0 or configuration 1 in Table 9.4.3.2-1 is applied,

$$T_{\text{Identify, E-UTRAN TDD}} = T_{\text{BasicIdentify}} \cdot \frac{480}{T_{\text{Inter1}}} \cdot \text{CSSF}_{\text{interRAT}} \quad \text{ms},$$

- When configuration 2 or configuration 3 in Table 9.4.3.2-1 is applied,

$$T_{\text{Identify, E-UTRAN TDD}} = T_{\text{BasicIdentify}} \cdot \frac{480}{T_{\text{Inter1}}} \cdot \text{CSSF}_{\text{interRAT}} + 240 \cdot \text{CSSF}_{\text{interRAT}} \quad \text{ms},$$

where:

$$T_{\text{BasicIdentify}} = 480 \text{ ms},$$

T_{Inter1} is defined in clause 9.4.1,

$\text{CSSF}_{\text{interRAT}} = \text{CSSF}_{\text{within_gap},i}$ is the scaling factor for the measured inter-RAT E-UTRA carrier i which is calculated as specified in clause 9.1.5.2.

Identification of a cell shall include detection of the cell and additionally performing a single measurement with measurement period of $T_{\text{Measure, E-UTRAN TDD}}$ defined in Table 9.4.3.2-1.

Table 9.4.3.2-1: $T_{\text{Measure, E-UTRAN TDD}}$ for different configurations

| Configuration | Measurement bandwidth (RB) | Number of UL/DL sub-frames per half frame (5 ms) | | DwPTS | | $T_{\text{Measure, E-UTRAN TDD}}$ (ms) |
|---------------|----------------------------|--|----|-------------------|-------------------|--|
| | | DL | UL | Normal CP | Extended CP | |
| 0 | 6 | 2 | 2 | $19760 \cdot T_s$ | $20480 \cdot T_s$ | $480 \times \text{CSSF}_{\text{interRAT}}$ |
| 1 (Note 1) | 50 | 2 | 2 | $19760 \cdot T_s$ | $20480 \cdot T_s$ | $240 \times \text{CSSF}_{\text{interRAT}}$ |
| 2 | 6 | 1 | 3 | $19760 \cdot T_s$ | $20480 \cdot T_s$ | $720 \times \text{CSSF}_{\text{interRAT}}$ |
| 3 (Note 1) | 50 | 1 | 3 | $19760 \cdot T_s$ | $20480 \cdot T_s$ | $480 \times \text{CSSF}_{\text{interRAT}}$ |

NOTE 1: This configuration is optional.
NOTE 2: Void

The UE shall be capable of identifying and performing NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements of at least 4 identified E-UTRAN TDD cells per E-UTRA TDD carrier frequency layer during each layer 1 measurement period, for up to 7 E-UTRA TDD carrier frequency layers.

If higher layer filtering is used, an additional cell identification delay can be expected.

The NR – E-UTRAN TDD RSRP measurement accuracy for all measured cells shall be as specified in clause 10.2.2.
The NR – E-UTRAN TDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2.3.
The NR – E-UTRAN TDD RS-SINR measurement accuracy for all measured cells shall be as specified in clause 10.2.5.

9.4.3.3 Requirements when DRX is used

When DRX is in use and measurement gaps are configured, the UE shall be able to identify a new detectable E-UTRAN TDD cell within $T_{\text{Identify, E-UTRAN TDD}}$ specified in Table 9.4.3.3-1.

Table 9.4.3.3-1: Requirement to identify a newly detectable E-UTRAN TDD cell

| DRX cycle length (s) | $T_{\text{Identify, E-UTRAN TDD}}$ (s) (DRX cycles) | |
|---|--|--|
| | Gap period = 40 ms, 20 ms | Gap period = 80 ms |
| ≤ 0.16 | Non-DRX requirements in clause 9.4.3.2 apply | Non-DRX requirements in clause 9.4.3.2 apply |
| 0.256 | $5.12 * \text{CSSF}_{\text{interRAT}}$ ($20 * \text{CSSF}_{\text{interRAT}}$) | $7.68 * \text{CSSF}_{\text{interRAT}}$ ($30 * \text{CSSF}_{\text{interRAT}}$) |
| 0.32 | $6.4 * \text{CSSF}_{\text{interRAT}}$ ($20 * \text{CSSF}_{\text{interRAT}}$) | $7.68 * \text{CSSF}_{\text{interRAT}}$ ($24 * \text{CSSF}_{\text{interRAT}}$) |
| $0.32 < \text{DRX-cycle} \leq 10.24$ | Note1 ($20 * \text{CSSF}_{\text{interRAT}}$) | Note1 ($20 * \text{CSSF}_{\text{interRAT}}$) |
| NOTE 1: The time depends on the DRX cycle length. NOTE 2: $\text{CSSF}_{\text{interRAT}}$ is as defined in clause 9.4.3.2. | | |

When DRX is in use, the UE shall be capable of performing NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements of at least 4 identified E-UTRAN TDD cells per E-UTRA TDD frequency layer during each layer 1 measurement period, for up to 7 E-UTRA TDD carrier frequency layers, and the UE physical layer shall be capable of reporting NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements to higher layers with the measurement period $T_{\text{measure, E-UTRAN TDD}}$ specified in Table 9.4.3.3-2.

Table 9.4.3.3-2: Requirement to measure E-UTRAN TDD cells

| DRX cycle length (s) | $T_{\text{measure, E-UTRAN TDD}}$ (s) (DRX cycles) |
|---|--|
| ≤ 0.08 | Non-DRX Requirements in clause 9.4.3.2 apply |
| 0.128 | For configuration 2 ^{Note3} , non-DRX requirements in clause 9.4.3.2 apply, Otherwise: Note1 ($5 * \text{CSSF}_{\text{interRAT}}$) |
| $0.128 < \text{DRX-cycle} \leq 10.24$ | Note1 ($5 * \text{CSSF}_{\text{interRAT}}$) |
| NOTE 1: The time depends on the DRX cycle length. NOTE 2: $\text{CSSF}_{\text{interRAT}}$ is as defined in clause 9.4.3.2. NOTE 3: See Table 9.4.3.2-1. | |

If higher layer filtering is used, an additional cell identification delay can be expected.

The NR – E-UTRAN TDD RSRP measurement accuracy for all measured cells shall be as specified in clause 10.2.2.
The NR – E-UTRAN TDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2.3.
The NR – E-UTRAN TDD RS-SINR measurement accuracy for all measured cells shall be as specified in clause 10.2.5.

9.4.3.4 Measurement reporting requirements

9.4.3.4.1 Periodic Reporting

The reported NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

9.4.3.4.2 Event-Triggered Periodic Reporting

The reported NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered periodic measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

The first report in event-triggered periodic measurement reporting shall meet the requirements specified in clause 9.4.3.4.3.

9.4.3.4.3 Event-Triggered Reporting

The reported NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

The UE shall not send any event-triggered measurement reports as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$ where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{Identify, E-UTRAN TDD}$ defined in clauses 9.4.3.2 and 9.4.3.3 without DRX and with DRX, respectively. When L3 filtering is used, an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{Identify, E-UTRAN TDD}$ becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event as per TS 38.331 [2], the event triggered measurement reporting delay shall be less than $T_{Measure, E-UTRAN TDD}$ provided the timing to that cell has not changed more than $\pm 50 T_s$ while measurement gap has not been available and the L3 filter has not been used.

9.4.4 Inter-RAT RSTD measurements

9.4.4.1 NR – E-UTRAN FDD RSTD measurements

9.4.4.1.1 Introduction

The requirements are applicable for NR–E-UTRAN FDD RSTD measurements requested via LPP [22, 27].

When the UE is in NE-DC operation mode and an NR–E-UTRAN FDD RSTD measurement configured by NR PCell is on a E-UTRA serving frequency carrier, then the corresponding E-UTRA intra-frequency measurements requirements as follows shall apply.

- Measurements configured on E-UTRA PSCC shall meet E-UTRAN OTDOA intra-frequency measurements requirements in clause 8.1.2.5. The applicable measurement accuracy requirements are in clause 9.1.10.
- Measurements configured on E-UTRA SCC shall meet all applicable requirements in clause 8.4, except that the terms PCell and primary component carrier shall be deemed to be swapped with PSCell and PSCC. The applicable measurement accuracy requirements are in clause 9.1.12, except that the terms PCell and primary component carrier shall be deemed to be swapped with PSCell and PSCC.

The requirements in clause 9.4.4.1 apply when:

- the UE is provided with the LTE timing information via LPP [27], including both *nr-LTE-SFN-Offset* and *nr-LTE-fineTiming-Offset*, or
- the UE is not provided with *nr-LTE-SFN-Offset* or *nr-LTE-fineTiming-Offset*, or
- the UE is provided with *nr-LTE-SFN-Offset* but not with *nr-LTE-fineTiming-Offset*.

When the UE is not aware of the SFN of at least one LTE cell in the OTDOA assistance data, the UE may be using
When the UE is not aware of the SFN of at least one LTE cell in the OTDOA assistance data, the UE may be using

autonomous gaps to acquire SFN of the OTDOA assistance data reference cell prior to requesting measurement gaps for performing the requested E-UTRA RSTD measurements before the $T_{\text{RSTD InterRAT, E-UTRAN FDD}}$ time period starts while meeting all the requirements in clause 9.4.4.1.2, provided that the OTDOA assistance data is provided to allow sufficient time for the UE to acquire the SFN before the $T_{\text{RSTD InterRAT, E-UTRAN FDD}}$ starts.

When the UE is not aware of and cannot derive the subframe timing difference between the NR serving cell and the OTDOA assistance data reference cell, the UE may need to request measurement gaps to perform cell detection for the OTDOA assistance data reference cell prior to requesting measurement gaps for performing the requested E-UTRA RSTD measurements before the $T_{\text{RSTD InterRAT, E-UTRAN FDD}}$ time period starts while meeting all the requirements in clause 9.4.4.1.2, provided that the OTDOA assistance data is provided to allow sufficient time for the UE to detect the cell before the $T_{\text{RSTD InterRAT, E-UTRAN FDD}}$ starts.

9.4.4.1.2 Requirements

When the physical layer cell identities of neighbour cells together with the OTDOA assistance data are provided, the UE shall be able to detect and measure inter-RAT E-UTRAN FDD RSTD, specified in TS 38.215 [4], for at least $n=16$ cells, including the reference cell, within $T_{\text{RSTD InterRAT, E-UTRAN FDD}}$ ms as given below:

$$T_{\text{RSTD InterRAT, E-UTRAN FDD}} = T_{\text{PRS}} \cdot (M - 1) + \Delta \quad \text{ms},$$

where

$T_{\text{RSTD InterRAT, E-UTRAN FDD}}$ is the total time for detecting and measuring at least n cells,

T_{PRS} is the largest value of the cell-specific positioning subframe configuration period, defined in TS 36.211 [23], among the measured n cells including the reference cell,

M is the number of PRS positioning occasions as defined in Table 9.4.4.1.2-1, where each PRS positioning occasion comprises of N_{PRS} ($1 \leq N_{\text{PRS}} \leq 6$) consecutive downlink positioning subframes defined in TS 36.211 [23],

$\text{CSSF}_{\text{interRAT}} = \text{CSSF}_{\text{within_gap},i}$ is the scaling factor determined by the gap sharing scheme for the RSTD measurements on the carrier frequency i as defined in clause 9.1.5.2,

$\Delta = 160 \cdot \left\lceil \frac{n}{M} \right\rceil$ ms is the measurement time for a single PRS positioning occasion which includes the sampling time and the processing time, and

the n cells are distributed on up to two E-UTRAN FDD carrier frequencies.

Table 9.4.4.1.2-1: Number of PRS positioning occasions within $T_{\text{RSTD InterRAT, E-UTRAN FDD}}$

| Positioning subframe configuration period T_{PRS} | Number of PRS positioning occasions M | |
|---|---|---|
| | f2 ^{Note1} | f1 and f2 ^{Note2} |
| 160 ms | $16 \times \text{CSSF}_{\text{interRAT}}$ | $32 \times \text{CSSF}_{\text{interRAT}}$ |
| >160 ms | $8 \times \text{CSSF}_{\text{interRAT}}$ | $16 \times \text{CSSF}_{\text{interRAT}}$ |
| NOTE 1: When inter-RAT E-UTRAN FDD RSTD measurements are performed over the reference cell and neighbour cells, which belong to the E-UTRAN FDD carrier frequency f2. | | |
| NOTE 2: When inter-RAT E-UTRAN FDD RSTD measurements are performed over the reference cell and the neighbour cells, which belong to the E-UTRAN FDD carrier frequency f1 and the E-UTRAN FDD carrier frequency f2 respectively. | | |

The UE physical layer shall be capable of reporting RSTD for the reference cell and all the neighbor cells i out of at least $(n-1)$ neighbor cells within $T_{\text{RSTD InterRAT, E-UTRAN FDD}}$ provided:

$$\left(\text{PRS } \hat{E}_s / \text{Iot} \right)_{\text{ref}} \geq -6 \text{ dB for all Frequency Bands for the reference cell,}$$

$$\left(\text{PRS } \hat{E}_s / \text{Iot} \right)_i \geq -13 \text{ dB for all Frequency Bands for neighbour cell } i,$$

$(\text{PRS } \hat{E}_s / \text{Iot})_{ref}$ and $(\text{PRS } \hat{E}_s / \text{Iot})_i$ conditions apply for all subframes of at least $L = \frac{M}{2}$ PRS positioning

occasions,

PRP 1,2_{dBm} according to TS 36.133 [15, Annex B.2.6] for a corresponding Band,

$\text{PRS } \hat{E}_s / \text{Iot}$ is defined as the ratio of the average received energy per PRS resource element during the useful part of the symbol to the average received power spectral density of the total noise and interference for this resource element, where the ratio is measured over all resource elements which carry PRS.

The time $T_{\text{RSTD InterRAT, E-UTRAN FDD}}$ starts from the first subframe of the PRS positioning occasion closest in time after both the *OTDOA-RequestLocationInformation* message and the OTDOA assistance data in the *OTDOA-ProvideAssistanceData* message via LPP as specified in TS 38.305 [22], are delivered to the physical layer of the UE.

The RSTD measurement accuracy for all measured neighbor cells i shall be fulfilled according to the accuracy as specified in clause 10.2.4.

9.4.4.1.2.1 RSTD Measurement Reporting Delay

This requirement assumes that the measurement report is not delayed by other LPP signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times \text{TTI}_{\text{DCCH}}$ where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report.

9.4.4.1.2.2 Requirements for acquiring the timing of the E-UTRA OTDOA reference cell

When the UE is not aware of the SFN of at least one LTE cell in the OTDOA assistance data, the UE supporting per-FR gaps may make autonomous gaps in downlink reception and uplink transmission of the PCell, PSCell, and each of the SCells in FR1 for acquiring SFN of the reference cell in the E-UTRA OTDOA assistance data, while no autonomous gaps in downlink reception or uplink transmission are allowed in any of the UE serving cells in FR2. The UE, which are only supporting per-UE gaps, may make autonomous gaps in downlink reception and uplink transmission of the PCell, PSCell, and each of the SCells for acquiring the SFN of the reference cell in the E-UTRA OTDOA assistance data.

When the UE is not aware of and cannot derive the subframe timing difference between the NR serving cell and the OTDOA assistance data reference cell, the UE may need to request measurement gaps while indicating *extra-FineTimingDetection* according to TS 38.331 [2] for detecting the reference cell in the E-UTRA OTDOA assistance data.

When the UE is performing one or both of SFN acquisition or cell detection as specified above, the UE shall be able to determine the timing of the E-UTRA OTDOA assistance data reference cell during the time period

$$T_{\text{RefCell,E-UTRAN}} = T_{\text{Detect, E-UTRAN FDD}} + T_{\text{MIB}} + T_{\text{ECGI}},$$

where

$T_{\text{Detect, E-UTRAN FDD}} = T_{\text{Identify, E-UTRAN FDD}} - T_{\text{measure, E-UTRAN FDD}}$ is according to clause 9.4.2 assuming $\text{CSSF}_{\text{interRAT}}=1$ and it is the time needed to detect the E-UTRA OTDOA assistance data reference cell when the UE needs to acquire the subframe and slot timing of the cell, provided the UE is configured with measurement gaps ($T_{\text{Detect, E-UTRAN FDD}}=0$ when both *nr-LTE-SFN-Offset* and *nr-LTE-fineTiming-Offset* are provided in the E-UTRA OTDOA assistance data or the E-UTRA OTDOA assistance data reference cell is known to the UE), and

$T_{\text{MIB}} = 50$ ms is the time required to acquire SFN of the E-UTRA OTDOA assistance data reference cell provided the OTDOA assistance data reference cell is decodable and at least all E-UTRA subframes #0 during T_{MIB} are available at the UE receiver ($T_{\text{MIB}}=0$ when *nr-LTE-SFN-Offset* is provided in the E-UTRA OTDOA assistance data), and

$T_{\text{ECGI}} = 100$ ms is the time required to acquire ECGI of the E-UTRA OTDOA assistance data reference cell when *cellGlobalId* is included in *OTDOA-ReferenceCellInfo* and the UE is not aware of the ECGI of this cell ($T_{\text{ECGI}} = 0$ when *cellGlobalId* is not included in *OTDOA-ReferenceCellInfo* or the UE is aware of the ECGI of the E-UTRA OTDOA assistance data reference cell).

When detecting the E-UTRAN OTDOA reference cell, the requirements in this clause shall be met, provided the conditions for the detectable cell are fulfilled according to clause 9.4.2.1. In addition, the MIB of the E-UTRA OTDOA

reference cell whose SFN is acquired shall be considered decodable by the UE provided the PBCH demodulation requirements are met according to TS 36.101 [25].

The requirement for acquiring the timing of the E-UTRA OTDOA reference cell within $T_{\text{RefCell,E-UTRAN}}$ is applicable when no DRX is used as well as when any of the DRX cycles specified in TS 38.331 [2] is used.

When $T_{\text{MIB}} > 0$ and UE is using autonomous gaps during T_{MIB} , the UE shall transmit at least $N_{\text{ACK/NACK, MIB, FDD}}$ ACK/NACKs on PCell, PSCell, and each of activated SCell(s) in the frequency range where the autonomous gaps are created, specified in Table 9.4.4.1.2.2-1. When $T_{\text{ECGI}} > 0$ and UE is using autonomous gaps during T_{ECGI} , the UE shall transmit at least $N_{\text{ACK/NACK, ECGI, FDD}}$ ACK/NACKs on PCell, PSCell, and each of activated SCell(s) in the frequency range where the autonomous gaps are created, specified in Table 9.4.4.1.2.2-2. When both $T_{\text{MIB}} > 0$ and $T_{\text{ECGI}} > 0$ and UE is using autonomous gaps during $T_{\text{MIB}} + T_{\text{ECGI}}$, the UE shall transmit on PCell, PSCell, and each of activated SCell(s) in the frequency range where autonomous gaps are created at least $N_{\text{ACK/NACK, MIB+ECGI, FDD}}$ ACK/NACKs specified in Table 9.4.4.1.2.2-3, provided the OTDOA reference cell bandwidth is configured in the OTDOA assistance data [22, 27]. The requirements in Tables 9.4.4.1.2.2-1, 9.4.4.1.2.2-2, and 9.4.4.1.2.2-3 apply, provided that:

- there is continuous DL data allocation,
- no DRX cycle is used,
- no measurement gaps are configured,
- only one code word is transmitted in each slot,
- 2 slot ACK/NACK feedback is configured,
- 20 ms SMTC period is configured,
- SSBs are transmitted in one slot within SMTC window.

Table 9.4.4.1.2.2-1: Number of ACK/NACKs transmitted by the UE during T_{MIB}

| NACK/NACK, MIB, FDD | Configuration of the serving cell in which the transmitted ACK/NACKs are counted | |
|---------------------|--|---------|
| | Duplex mode configuration | SCS |
| 15 | FDD | 15 kHz |
| 39 | FDD | 30 kHz |
| 85 | FDD | 60 kHz |
| 0 | TDD <small>Note 1</small> | 15 kHz |
| 4 | TDD <small>Note 1</small> | 30 kHz |
| 12 | TDD <small>Note 1</small> | 60 kHz |
| 46 | TDD <small>Note 2</small> | 60 kHz |
| 104 | TDD <small>Note 2</small> | 120 kHz |

NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [18].
NOTE 2: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-2 [19].

Table 9.4.4.1.2.2-2: Number of ACK/NACKs transmitted by the UE during T_{ECGI}

| NACK/NACK, ECGI, FDD | Configuration of the serving cell in which the transmitted ACK/NACKs are counted | |
|----------------------|--|---------|
| | Duplex mode configuration | SCS |
| 66 | FDD | 15 kHz |
| 145 | FDD | 30 kHz |
| 298 | FDD | 60 kHz |
| 28 | TDD <small>Note 1</small> | 15 kHz |
| 67 | TDD <small>Note 1</small> | 30 kHz |
| 144 | TDD <small>Note 1</small> | 60 kHz |
| 175 | TDD <small>Note 2</small> | 60 kHz |
| 363 | TDD <small>Note 2</small> | 120 kHz |

NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [18].
NOTE 2: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-2 [19].

Table 9.4.4.1.2.2-3: Number of ACK/NACKs transmitted by the UE during $T_{MIB+T_{ECGI}}$

| NACK/NACK, MIB+ECGI, FDD | Configuration of the serving cell in which the transmitted ACK/NACKs are counted | |
|--------------------------|--|---------|
| | Duplex mode configuration | SCS |
| 84 | FDD | 15 kHz |
| 193 | FDD | 30 kHz |
| 402 | FDD | 60 kHz |
| 28 | TDD <small>Note 1</small> | 15 kHz |
| 81 | TDD <small>Note 1</small> | 30 kHz |
| 159 | TDD <small>Note 1</small> | 60 kHz |
| 233 | TDD <small>Note 2</small> | 60 kHz |
| 491 | TDD <small>Note 2</small> | 120 kHz |

NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [18].
NOTE 2: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-2 [19].

9.4.4.2 NR – E-UTRAN TDD RSTD measurements

9.4.4.2.1 Introduction

The requirements are applicable for NR–E-UTRAN TDD RSTD measurements requested via LPP [22, 27].

When the UE is in NE-DC operation mode and an NR–E-UTRAN TDD RSTD measurement configured by NR PCell is on a E-UTRA serving frequency carrier, then the corresponding E-UTRA intra-frequency measurements requirements as follows shall apply.

- Measurements configured on E-UTRA PSCC shall meet E-UTRAN OTDOA intra-frequency measurements requirements in clause 8.1.2.5. The applicable measurement accuracy requirements are in clause 9.1.10.
- Measurements configured on E-UTRA SCC shall meet all applicable requirements in clause 8.4, except that the terms PCell and primary component carrier shall be deemed to be swapped with PSCell and PSCC. The applicable measurement accuracy requirements are in clause 9.1.12, except that the terms PCell and primary component carrier shall be deemed to be swapped with PSCell and PSCC.

The requirements in clause 9.4.4.1 apply when:

- the UE is provided with the LTE timing information via LPP [27], including both *nr-LTE-SFN-Offset* and *nr-LTE-fineTiming-Offset*, or
- the UE is not provided with *nr-LTE-SFN-Offset* or *nr-LTE-fineTiming-Offset*, or
- the UE is provided with *nr-LTE-SFN-Offset* but not with *nr-LTE-fineTiming-Offset*.

When the UE is not aware of the SFN of at least one LTE cell in the OTDOA assistance data, the UE may be using autonomous gaps to acquire SFN of the OTDOA assistance data reference cell prior to requesting measurement gaps for performing the requested E-UTRA RSTD measurements before the $T_{RSTD\ InterRAT,E-UTRAN\ TDD}$ time period starts while meeting all the requirements in clause 9.4.4.2.2, provided that the OTDOA assistance data is provided to allow sufficient time for the UE to acquire the SFN before the $T_{RSTD\ InterRAT,E-UTRAN\ TDD}$ starts. When the UE is not aware of and cannot derive the subframe timing difference between the NR serving cell and the OTDOA assistance data reference cell, the UE may need to request measurement gaps to perform cell detection for the OTDOA assistance data reference cell prior to requesting measurement gaps for performing the requested E-UTRA RSTD measurements before the $T_{RSTD\ InterRAT,E-UTRAN\ TDD}$ time period starts while meeting all the requirements in clause 9.4.4.2.2, provided that the OTDOA assistance data is provided to allow sufficient time for the UE to detect the cell before the $T_{RSTD\ InterRAT,E-UTRAN\ TDD}$ starts.

9.4.4.2.2 Requirements

When the physical layer cell identities of neighbour cells together with the OTDOA assistance data are provided, the UE shall be able to detect and measure inter-RAT -UTRAN TDD RSTD, specified in TS 38.215 [4], for at least $n=16$ cells, including the reference cell, within $T_{\text{RSTD InterRAT,E-UTRAN TDD}}$ ms as given below:

$$T_{\text{RSTD InterRAT,E-UTRAN TDD}} = T_{\text{PRS}} \cdot (M - 1) + \Delta \quad \text{ms} \quad ,$$

where

$T_{\text{RSTD InterRAT,E-UTRAN TDD}}$ is the total time for detecting and measuring at least n cells,

T_{PRS} is the largest value of the cell-specific positioning subframe configuration period, defined in TS 36.211 [23], among the measured n cells including the reference cell,

M is the number of PRS positioning occasions as defined in Table 9.4.4.2.2-1, where a PRS positioning occasion is as defined in clause 9.4.4.1.2,

$\text{CSSF}_{\text{interRAT}} = \text{CSSF}_{\text{within_gap},i}$ is the scaling factor determined by the gap sharing scheme for the RSTD measurements on the carrier frequency i as defined in clause 9.1.5.2,

$\Delta = 160 \cdot \left\lceil \frac{n}{M} \right\rceil$ ms is the measurement time for a single PRS positioning occasion which includes the sampling time and the processing time, and

the n cells are distributed on up to two E-UTRAN TDD carrier frequencies.

Table 9.4.4.2.2-1: Number of PRS positioning occasions within $T_{\text{RSTD InterRAT,E-UTRAN TDD}}$

| Positioning subframe configuration period T_{PRS} | Number of PRS positioning occasions M | |
|---|---|---|
| | f2 ^{Note1} | f1 and f2 ^{Note2} |
| 160 ms | $16 \times \text{CSSF}_{\text{interRAT}}$ | $32 \times \text{CSSF}_{\text{interRAT}}$ |
| >160 ms | $8 \times \text{CSSF}_{\text{interRAT}}$ | $16 \times \text{CSSF}_{\text{interRAT}}$ |
| NOTE 1: When inter-RAT E-UTRAN TDD RSTD measurements are performed over the reference cell and neighbour cells, which belong to the E-UTRAN TDD carrier frequency f2. | | |
| NOTE 2: When inter-RAT E-UTRAN TDD RSTD measurements are performed over the reference cell and the neighbour cells, which belong to the E-UTRAN TDD carrier frequency f1 and the E-UTRAN TDD carrier frequency f2 respectively. | | |

The requirements in this clause shall apply for all TDD special subframe configurations specified in TS 36.211 [23] and for the TDD uplink-downlink configurations as specified in Table 9.4.4.2.2-2 for UE requiring measurement gaps for these measurements. For UEs capable of performing inter-RAT RSTD measurements without measurement gaps, TDD uplink-downlink subframe configurations as specified in Table 9.4.4.2.2-3 shall apply.

Table 9.4.4.2.2-2: TDD uplink-downlink subframe configurations applicable for inter-RAT RSTD requirements

| PRS Transmission Bandwidth (RB) | Applicable TDD uplink-downlink configurations |
|--|---|
| 6, 15 | 3, 4 and 5 |
| 25 | 1, 2, 3, 4, 5 and 6 |
| 50, 75, 100 | 0, 1, 2, 3, 4, 5 and 6 |
| NOTE 1: Uplink-downlink configurations are specified in Table 4.2-2 in TS 36.211 [23]. | |

Table 9.4.4.2.2-3: TDD uplink-downlink subframe configurations applicable for inter-RAT RSTD requirements without gaps

| PRS Transmission Bandwidth (RB) | Applicable TDD uplink-downlink configurations |
|--|---|
| 6, 15 | 1, 2, 3, 4 and 5 |
| 25, 50, 75, 100 | 0, 1, 2, 3, 4, 5 and 6 |
| NOTE 1: Uplink-downlink configurations are specified in Table 4.2-2 in TS 36.211 [23]. | |

The UE physical layer shall be capable of reporting RSTD for the reference cell and all the neighbor cells i out of at least $(n-1)$ neighbor cells within $T_{\text{RSTD InterRAT,E-UTRAN TDD}}$ provided:

$$\left(\text{PRS } \hat{E}_s / \text{Iot} \right)_{ref} \geq -6 \text{ dB for all Frequency Bands for the reference cell,}$$

$$\left(\text{PRS } \hat{E}_s / \text{Iot} \right)_i \geq -13 \text{ dB for all Frequency Bands for neighbour cell } i,$$

$$\left(\text{PRS } \hat{E}_s / \text{Iot} \right)_{ref} \text{ and } \left(\text{PRS } \hat{E}_s / \text{Iot} \right)_i \text{ conditions apply for all subframes of at least } L = \frac{M}{2} \text{ PRS positioning}$$

occasions,

PRP 1,2|_{dBm} according to TS 36.133 [15, Annex B.2.6] for a corresponding Band,

$\text{PRS } \hat{E}_s / \text{Iot}$ is as defined in clause 9.4.4.1.2.

The time $T_{\text{RSTD InterRAT,E-UTRAN TDD}}$ starts from the first subframe of the PRS positioning occasion closest in time after both the OTDOA-RequestLocationInformation message and the OTDOA assistance data in the OTDOA-ProvideAssistanceData message via LPP as specified in TS 38.305 [22], are delivered to the physical layer of the UE.

The RSTD measurement accuracy for all measured neighbor cells i shall be fulfilled according to the accuracy as specified in clause 10.2.4.

9.4.4.2.2.1 RSTD Measurement Reporting Delay

This requirement assumes that that the measurement report is not delayed by other LPP signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times \text{TTI}_{\text{DCCH}}$ where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report.

9.4.4.2.2.2 Requirements for acquiring the timing of the E-UTRA OTDOA reference cell

When the UE is not aware of the SFN of at least one LTE cell in the OTDOA assistance data, the UE supporting per-FR gaps may make autonomous gaps in downlink reception and uplink transmission of the PCell, PSCell, and each of the SCells in FR1 for acquiring SFN of the reference cell in the E-UTRA OTDOA assistance data, while no autonomous gaps in downlink reception or uplink transmission are allowed in any of the UE serving cells in FR2. The UE, which are only supporting per-UE gaps, may make autonomous gaps in downlink reception and uplink transmission of the PCell, PSCell, and each of the SCells for acquiring the SFN of the reference cell in the E-UTRA OTDOA assistance data.

When the UE is not aware of and cannot derive the subframe timing difference between the NR serving cell and the OTDOA assistance data reference cell, the UE may need to request measurement gaps while indicating *eutra-FineTimingDetection* according to TS 38.331 [2] for detecting the reference cell in the E-UTRA OTDOA assistance data.

When the UE is performing one or both of SFN acquisition or cell detection as specified above, the UE shall be able to determine the timing of the E-UTRA OTDOA assistance data reference cell during the time period

$$T_{\text{RefCell,E-UTRAN}} = T_{\text{Detect, E-UTRAN TDD}} + T_{\text{MIB}} + T_{\text{ECGI}},$$

where

$T_{\text{Detect, E-UTRAN TDD}} = T_{\text{Identify, E-UTRAN TDD}} - T_{\text{measure, E-UTRAN TDD}}$ is according to clause 9.4.3 assuming $\text{CSSF}_{\text{interRAT}}=1$ and it is the time needed to detect the E-UTRA OTDOA assistance data reference cell when the UE needs to acquire the

subframe and slot timing of the cell, provided the UE is configured with measurement gaps ($T_{\text{Detect, E-UTRAN TDD}}=0$ when both *nr-LTE-SFN-Offset* and *nr-LTE-fineTiming-Offset* are provided in the E-UTRA OTDOA assistance data or the E-UTRA OTDOA assistance data reference cell is known to the UE), and

$T_{\text{MIB}} = 50$ ms is the time required to acquire SFN of the E-UTRA OTDOA assistance data reference cell provided the OTDOA assistance data reference cell is decodable and at least all E-UTRA subframes #0 during T_{MIB} are available at the UE receiver ($T_{\text{MIB}}=0$ when *nr-LTE-SFN-Offset* is provided in the E-UTRA OTDOA assistance data), and

$T_{\text{ECGI}} = 100$ ms is the time required to acquire ECGI of the E-UTRA OTDOA assistance data reference cell when *cellGlobalId* is included in *OTDOA-ReferenceCellInfo* and the UE is not aware of the ECGI of this cell ($T_{\text{ECGI}} = 0$ when *cellGlobalId* is not included in *OTDOA-ReferenceCellInfo* or the UE is aware of the ECGI of the E-UTRA OTDOA assistance data reference cell).

When detecting the E-UTRAN OTDOA reference cell, the requirements in this clause shall be met, provided the conditions for the detectable cell are fulfilled according to clause 9.4.3.1. In addition, the MIB of the E-UTRA OTDOA reference cell whose SFN is acquired shall be considered decodable by the UE provided the PBCH demodulation requirements are met according to TS 36.101 [25].

The requirement for acquiring the timing of the E-UTRA OTDOA reference cell within $T_{\text{RefCell, E-UTRAN}}$ is applicable when no DRX is used as well as when any of the DRX cycles specified in TS 38.331 [2] is used.

When $T_{\text{MIB}} > 0$ and UE is using autonomous gaps during T_{MIB} , the UE shall transmit at least $N_{\text{ACK/NACK, MIB, TDD}}$ ACK/NACKs on PCell, PSCell, and each of activated SCell(s) in the frequency range where the autonomous gaps are created, specified in Table 9.4.4.2.2.2-1. When $T_{\text{ECGI}} > 0$ and UE is using autonomous gaps during T_{ECGI} , the UE shall transmit at least $N_{\text{ACK/NACK, ECGI, TDD}}$ ACK/NACKs on PCell, PSCell, and each of activated SCell(s) in the frequency range where autonomous gaps are created, specified in Table 9.4.4.2.2.2-2. When both $T_{\text{MIB}} > 0$ and $T_{\text{ECGI}} > 0$ and UE is using autonomous gaps during $T_{\text{MIB}} + T_{\text{ECGI}}$, the UE shall transmit on PCell, PSCell, and each of activated SCell(s) in the frequency range where autonomous gaps are created at least $N_{\text{ACK/NACK, MIB+ECGI, TDD}}$ ACK/NACKs specified in Table 9.4.4.2.2.2-3, provided the OTDOA reference cell bandwidth is configured in the OTDOA assistance data [22, 27]. The requirements in Tables 9.4.4.2.2.2-1, 9.4.4.2.2.2-2 and 9.4.4.2.2.2-3 apply, provided that:

- there is continuous DL data allocation,
- no DRX cycle is used,
- no measurement gaps are configured,
- only one code word is transmitted in each slot,
- 2 slot ACK/NACK feedback is configured,
- 20 ms SMTC period is configured,
- SSBs are transmitted in one slot within SMTC window.

Table 9.4.4.2.2.2-1: Minimum number of ACK/NACKs transmitted by the UE during T_{MIB}

| NACK/NACK, MIB, TDD | Configuration of the serving cell in which the transmitted ACK/NACKs are counted | |
|---------------------|--|---------|
| | Duplex mode configuration | SCS |
| 15 | FDD | 15 kHz |
| 39 | FDD | 30 kHz |
| 85 | FDD | 60 kHz |
| 0 | TDD <small>Note 1</small> | 15 kHz |
| 4 | TDD <small>Note 1</small> | 30 kHz |
| 12 | TDD <small>Note 1</small> | 60 kHz |
| 46 | TDD <small>Note 2</small> | 60 kHz |
| 104 | TDD <small>Note 2</small> | 120 kHz |

NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [18].
NOTE 2: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-2 [19].

Table 9.4.4.2.2.2-2: Minimum number of ACK/NACKs transmitted by the UE during T_{ECGI}

| NACK/NACK, ECGI, TDD | Configuration of the serving cell in which the transmitted ACK/NACKs are counted | |
|----------------------|--|---------|
| | Duplex mode configuration | SCS |
| 66 | FDD | 15 kHz |
| 145 | FDD | 30 kHz |
| 298 | FDD | 60 kHz |
| 28 | TDD ^{Note 1} | 15 kHz |
| 67 | TDD ^{Note 1} | 30 kHz |
| 144 | TDD ^{Note 1} | 60 kHz |
| 175 | TDD ^{Note 2} | 60 kHz |
| 363 | TDD ^{Note 2} | 120 kHz |

NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [18].
NOTE 2: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-2 [19].

Table 9.4.4.2.2-3: Minimum number of ACK/NACKs transmitted by the UE during $T_{MIB}+T_{ECGI}$

| NACK/NACK, MIB+ECGI, TDD | Configuration of the serving cell in which the transmitted ACK/NACKs are counted | |
|--------------------------|--|---------|
| | Duplex mode configuration | SCS |
| 84 | FDD | 15 kHz |
| 193 | FDD | 30 kHz |
| 402 | FDD | 60 kHz |
| 28 | TDD ^{Note 1} | 15 kHz |
| 81 | TDD ^{Note 1} | 30 kHz |
| 159 | TDD ^{Note 1} | 60 kHz |
| 233 | TDD ^{Note 2} | 60 kHz |
| 491 | TDD ^{Note 2} | 120 kHz |

NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [18].
NOTE 2: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-2 [19].

9.4.5 Inter-RAT E-CID measurements

9.4.5.1 NR–E-UTRAN FDD E-CID RSRP and RSRQ measurements

9.4.5.1.1 Introduction

The requirements in clause 9.4.5.1. shall apply provided the UE has received *ECID-RequestLocationInformation* message from LMF via LPP requesting the UE to report inter-RAT E-UTRAN FDD E-CID RSRP and RSRQ measurements [22, 27].

9.4.5.1.2 Requirements

The requirements in clause 9.4.2 also apply for this clause except the measurement reporting requirements. The measurement reporting requirements for E-CID RSRP and RSRQ are defined in clause 9.4.5.1.3.

9.4.5.1.3 Measurement Reporting Delay

This requirement assumes that that the measurement report is not delayed by other LPP signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$ where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report.

Reported RSRP and RSRQ measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.2.2 and 10.2.3, respectively.

9.4.5.2 NR–E-UTRAN TDD E-CID RSRP and RSRQ measurements

9.4.5.2.1 Introduction

The requirements in clause 9.4.5.2. shall apply provided the UE has received *ECID-RequestLocationInformation* message from LMF via LPP requesting the UE to report inter-RAT E-UTRAN TDD E-CID RSRP and RSRQ measurements [22, 27].

9.4.5.2.2 Requirements

The requirements in clause 9.4.3 also apply for this clause except the measurement reporting requirements. The measurement reporting requirements for E-CID RSRP and RSRQ are defined in clause 9.4.5.2.3.

9.4.5.2.3 Measurement Reporting Delay

This requirement assumes that the measurement report is not delayed by other LPP signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$ where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report.

Reported RSRP and RSRQ measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.2.2 and 10.2.3, respectively.

9.5 L1-RSRP measurements for Reporting

9.5.1 Introduction

When configured by the network, the UE shall be able to perform L1-RSRP measurements of configured CSI-RS, SSB or CSI-RS and SSB resources for L1-RSRP. The measurements shall be performed for a serving cell, including PCell, PSCell, or SCell, on the resources configured for L1-RSRP measurements within the active BWP.

The UE shall be able to measure all CSI-RS resources and/or SSB resources of the *nzp-CSI-RS-ResourceSet* and/or *csi-SSB-ResourceSet* within the *CSI-ResourceConfig* settings configured for L1-RSRP for the active BWP, provided that the number of resources does not exceed the UE capability indicated by *beamManagementSSB-CSI-RS*.

The UE shall report the measurement quantity (*reportQuantity*) and send periodic, semi-persistent or aperiodic reports, according to the *reportConfigType* according to the CSI reporting configuration(s) (*CSI-ReportConfig*) for the active BWP.

9.5.2 Requirements applicability

The requirements in clause 9.5 apply, provided:

- The CSI-RS or SSB or CSI-RS and SSB resources configured for L1-RSRP measurements are measurable.

An SSB resource configured for L1-RSRP shall be considered measurable when for each relevant SSB the following conditions are met:

- L1-RSRP related side conditions given in clauses 10.1.19.1 and 10.1.20.1 for FR1 and FR2, respectively, for a corresponding band,
- SSB_{RP} and SSB \hat{E}_s/I_{ot} according to Annex B.2.4.1 for a corresponding band.

A CSI-RS resource configured for L1-RSRP shall be considered measurable when for each relevant CSI-RS the following conditions are met:

- L1-RSRP related side conditions given in clauses 10.1.19.2 and 10.1.20.2 for FR1 and FR2, respectively, for a corresponding band,

- CSI-RS_{RP} and CSI-RS \hat{E}_s/I_{ot} according to Annex B.2.4.2 for a corresponding band.

A CSI-RS and SSB resource configured for L1-RSRP shall be considered measurable when the measurable resource conditions are met for both CSI-RS resource and SSB resource.

Requirements are defined for periodic, semi-persistent and aperiodic resources.

9.5.3 Measurement Reporting Requirements

The UE shall send L1-RSRP reports only for report configurations configured for the active BWP.

The UE shall report the L1-RSRP value as a 7-bit value in the range [-140, -44] dBm with 1dB step size according to clause 10.1.19 for FR1 and 10.1.20 for FR2 if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting* is enabled, the UE shall use differential L1-RSRP based reporting as defined in clause 10.1.19 for FR1 and 10.1.20 for FR2. The differential L1-RSRP is quantized to a 4-bit value with 2dB step size. The mapping between the reported L1-RSRP value and the measured quantity is described in 10.1.6.

9.5.3.1 Periodic Reporting

Reported L1-RSRP measurements contained in periodic L1-RSRP measurement reports shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively.

The UE shall only send periodic L1-RSRP measurement reports for an active BWP.

The UE shall transmit the periodic L1-RSRP reporting on PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

9.5.3.2 Semi-Persistent Reporting

Reported L1-RSRP measurements contained in a Semi-Persistent L1-RSRP measurement report shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively. This requirement applies for semi-persistent L1-RSRP reports send on PUSCH or PUCCH.

The UE shall only send semi-persistent L1-RSRP measurement reports on PUSCH, if a DCI request has been received.

The UE shall only send semi-persistent L1-RSRP measurement reports on PUCCH, if an activation command [7] has been received.

The UE shall transmit the semi-persistent L1-RSRP reporting on PUSCH or PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

9.5.3.3 Aperiodic Reporting

Reported L1-RSRP measurements contained in aperiodic triggered, aperiodic triggered periodic and aperiodic triggered semi-persistent L1-RSRP reports shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively.

The UE shall only send aperiodic L1-RSRP measurement reports, if a DCI trigger has been received.

After the UE receives CSI request in DCI, the UE shall transmit the aperiodic L1-RSRP reporting on PUSCH over the air interface at the time specified according to clause 6.1.2.1 in TS 38.214 [26].

9.5.4 L1-RSRP measurement requirements

9.5.4.1 SSB based L1-RSRP Reporting

The UE shall be capable of performing L1-RSRP measurements based on the configured SSB resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1-RSRP_Measurement_Period_SSB}$.

The value of $T_{L1-RSRP_Measurement_Period_SSB}$ is defined in Table 9.5.4.1-1 for FR1 and Table 9.5.4.1-2 for FR2, where

- $M=1$ if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and $M=3$ otherwise
- $N=8$.

For FR1,

- $P = \frac{1}{1 - \frac{T_{SSB}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB; and
- $P=1$ when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

For FR2,

- $P = \frac{1}{1 - \frac{T_{SSB}}{T_{SMTCperiod}}}$, when SSB is not overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$).
- P is $P_{sharing}$ factor, when SSB is not overlapped with measurement gap and SSB is fully overlapped with SMTC period ($T_{SSB} = T_{SMTCperiod}$).
- $P = \frac{1}{1 - \frac{T_{SSB}}{MGRP} - \frac{T_{SSB}}{T_{SMTCperiod}}}$, when SSB is partially overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and
 - $T_{SMTCperiod} \neq MGRP$ or
 - $T_{SMTCperiod} = MGRP$ and $T_{SSB} < 0.5 * T_{SMTCperiod}$
- P is $\frac{P_{sharing factor}}{1 - \frac{T_{SSB}}{MGRP}}$, when SSB is partially overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod} = MGRP$ and $T_{SSB} = 0.5 * T_{SMTCperiod}$
- $P = \frac{1}{1 - \frac{T_{SSB}}{\min(T_{SMTCperiod}, MGRP)}}$, when SSB is partially overlapped with measurement gap ($T_{SSB} < MGRP$) and SSB is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap.
- P is $\frac{1}{1 - \frac{T_{SSB}}{MGRP}} * P_{sharing factor}$, when SSB is partially overlapped with measurement gap and SSB is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} < MGRP$)
- $P_{sharing factor} = 1$, if the SSB configured for L1-RSRP measurement outside measurement gap is
 - not overlapped with the SSB symbols indicated by SSB-ToMeasure and 1 data symbol before each consecutive SSB symbols indicated by SSB-ToMeasure and 1 data symbol after each consecutive SSB symbols indicated by SSB-ToMeasure, given that SSB-ToMeasure is configured, and,
 - not overlapped with the RSSI symbols indicated by ss-RSSI-Measurement and 1 data symbol before each RSSI symbol indicated by ss-RSSI-Measurement and 1 data symbol after each RSSI symbol indicated by ss-RSSI-Measurement, given that ss-RSSI-Measurement is configured,
- $P_{sharing factor} = 3$, otherwise.

Where:

T_{SSB} = ssb-periodicityServingCell

$T_{SMTCperiod}$ = the configured SMTC period

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet previous conditions.

Table 9.5.4.1-1: Measurement period $T_{L1-RSRP_Measurement_Period_SSB}$ for FR1

| Configuration | $T_{L1-RSRP_Measurement_Period_SSB}$ (ms) |
|-------------------------|---|
| non-DRX | $\max(T_{Report}, \text{ceil}(M \cdot P) \cdot T_{SSB})$ |
| DRX cycle ≤ 320 ms | $\max(T_{Report}, \text{ceil}(1.5 \cdot M \cdot P) \cdot \max(T_{DRX}, T_{SSB}))$ |
| DRX cycle > 320 ms | $\text{ceil}(M \cdot P) \cdot T_{DRX}$ |
| Note: | T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. |

Table 9.5.4.1-2: Measurement period $T_{L1-RSRP_Measurement_Period_SSB}$ for FR2

| Configuration | $T_{L1-RSRP_Measurement_Period_SSB}$ (ms) |
|-------------------------|---|
| non-DRX | $\max(T_{Report}, \text{ceil}(M \cdot P \cdot N) \cdot T_{SSB})$ |
| DRX cycle ≤ 320 ms | $\max(T_{Report}, \text{ceil}(1.5 \cdot M \cdot P \cdot N) \cdot \max(T_{DRX}, T_{SSB}))$ |
| DRX cycle > 320 ms | $\text{ceil}(1.5 \cdot M \cdot P \cdot N) \cdot T_{DRX}$ |
| Note: | T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. |

9.5.4.2 CSI-RS based L1-RSRP Reporting

The UE shall be capable of performing L1-RSRP measurements based on the configured CSI-RS resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1-RSRP_Measurement_Period_CSI-RS}$.

The value of $T_{L1-RSRP_Measurement_Period_CSI-RS}$ is defined in Table 9.5.4.2-1 for FR1 and in Table 9.5.4.2-2 for FR2, where

- For periodic and semi-persistent CSI-RS resources, $M=1$ if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and $M=3$ otherwise
- For aperiodic CSI-RS resources $M=1$
- For periodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to ON, $N=\text{ceil}(\text{maxNumberRxBeam} / N_{\text{res_per_set}})$, where $N_{\text{res_per_set}}$ is number of resources in the resource set. The requirements apply provided *qcl-InfoPeriodicCSI-RS* is configured for all resources in the resource set.
 - SSB for L1-RSRP measurement, or
 - another CSI-RS in resource set configured with repetition ON.
- For periodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to ON, $N=\text{ceil}(\text{maxNumberRxBeam} / N_{\text{res_per_set}})$, where $N_{\text{res_per_set}}$ is number of resources in the resource set. The requirements apply provided *qcl-InfoPeriodicCSI-RS* is configured for with QCL-TypeD all resources in the resource set.
- For semi-persistent CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to OFF, $N=1$. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set and for each resource one RS has QCL-TypeD with
 - SSB for L1-RSRP measurement, or
 - another CSI-RS in resource set configured with repetition ON.
- For semi-persistent CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to ON, $N=\text{ceil}(\text{maxNumberRxBeam} / N_{\text{res_per_set}})$, where $N_{\text{res_per_set}}$ is number of resources in the resource set. The requirements apply provided TCI state is provided with QCL-TypeD for all resources in the resource set in the MAC CE activating the resource set.

- For aperiodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to OFF, $N=1$. The requirements apply provided *qcl-info* is configured for all resources in the resource set and for each resource one RS has QCL-TypeD with
 - SSB for L1-RSRP measurement, or
 - another CSI-RS in resource set configured with repetition ON.
- For aperiodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to ON, $N=1$. UE is not required to meet the accuracy requirements in clause 10.1.19.2 and 10.1.20.2 if number of resources in the resource set is smaller than *maxNumberRxBeam*. The requirements apply provided *qcl-info* is configured with QCL-TypeD for all resources in the resource set.

For FR1,

- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{\text{MRGP}}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and
- $P=1$ when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

For FR2,

- $P=1$, when CSI-RS is not overlapped with measurement gap and also not overlapped with SMTC occasion.
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{\text{MRGP}}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is not overlapped with SMTC occasion ($T_{\text{CSI-RS}} < \text{MRGP}$)
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when CSI-RS is not overlapped with measurement gap and CSI-RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$).
- $P = P_{\text{sharing factor}}$, when CSI-RS is not overlapped with measurement gap and CSI-RS is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$).
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{\text{MRGP}} - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and
 - $T_{\text{SMTCperiod}} \neq \text{MRGP}$ or
 - $T_{\text{SMTCperiod}} = \text{MRGP}$ and $T_{\text{CSI-RS}} < 0.5 * T_{\text{SMTCperiod}}$
- $P = \frac{3}{1 - \frac{T_{\text{CSI-RS}}}{\text{MRGP}}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and $T_{\text{SMTCperiod}} = \text{MRGP}$ and $T_{\text{CSI-RS}} = 0.5 * T_{\text{SMTCperiod}}$
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{\min(T_{\text{SMTCperiod}}, \text{MRGP})}}$, when CSI-RS is partially overlapped with measurement gap ($T_{\text{CSI-RS}} < \text{MRGP}$) and CSI-RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is partially or fully overlapped with measurement gap.
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{CSI-RS}}}{\text{MRGP}}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$) and SMTC occasion is partially overlapped with measurement gap ($T_{\text{SMTCperiod}} < \text{MRGP}$)
- $P_{\text{sharing factor}} = 1$, if the CSI-RS configured for L1-RSRP measurement outside measurement gap is

- not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, and,
- not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured
- $P_{\text{sharing factor}} = 3$, otherwise.

Where:

$T_{\text{SMTCperiod}}$ = the configured SMTC period.

$T_{\text{CSI-RS}}$ = the periodicity of CSI-RS configured for L1-RSRP measurement

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{\text{SMTCperiod}}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{\text{SMTCperiod}}$ corresponds to the value of higher layer parameter *smtc1*. $T_{\text{SMTCperiod}}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Note: The overlap between CSI-RS for L1-RSRP measurement and SMTC means that CSI-RS for L1-RSRP measurement is within the SMTC window duration.

Longer evaluation period would be expected if the combination of CSI-RS, SMTC occasion and measurement gap configurations does not meet previous conditions.

Table 9.5.4.2-1: Measurement period $T_{\text{L1-RSRP_Measurement_Period_CSI-RS}}$ for FR1

| Configuration | $T_{\text{L1-RSRP_Measurement_Period_CSI-RS}}$ (ms) |
|-------------------------------|---|
| non-DRX | $\max(T_{\text{Report}}, \text{ceil}(M \cdot P) \cdot T_{\text{CSI-RS}})$ |
| DRX cycle $\leq 320\text{ms}$ | $\max(T_{\text{Report}}, \text{ceil}(1.5 \cdot M \cdot P) \cdot \max(T_{\text{DRX}}, T_{\text{CSI-RS}}))$ |
| DRX cycle $> 320\text{ms}$ | $\text{ceil}(M \cdot P) \cdot T_{\text{DRX}}$ |
| Note 1: | $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. |
| Note 2: | the requirements are applicable provided that the CSI-RS resource configured for L1-RSRP measurement is transmitted with Density = 3. |

Table 9.5.4.2-2: Measurement period $T_{\text{L1-RSRP_Measurement_Period_CSI-RS}}$ for FR2

| Configuration | $T_{\text{L1-RSRP_Measurement_Period_CSI-RS}}$ (ms) |
|-------------------------------|---|
| non-DRX | $\max(T_{\text{Report}}, \text{ceil}(M \cdot P \cdot N) \cdot T_{\text{CSI-RS}})$ |
| DRX cycle $\leq 320\text{ms}$ | $\max(T_{\text{Report}}, \text{ceil}(1.5 \cdot M \cdot P \cdot N) \cdot \max(T_{\text{DRX}}, T_{\text{CSI-RS}}))$ |
| DRX cycle $> 320\text{ms}$ | $\text{ceil}(M \cdot P \cdot N) \cdot T_{\text{DRX}}$ |
| Note 1: | $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. |
| Note 2: | the requirements are applicable provided that the CSI-RS resource configured for L1-RSRP measurement is transmitted with Density = 3. |

9.5.5 Measurement restriction for CSI-RS and SSB for L1-RSRP measurement

The UE is required to be capable of measuring SSB and CSI-RS for L1-RSRP without measurement gaps. The UE is required to perform the SSB and CSI-RS measurements with measurement restrictions as described in the following clauses.

9.5.5.1 Measurement restriction for SSB based L1-RSRP

For FR1, when the SSB for L1-RSRP measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
- If SSB and CSI-RS have different SCS,
 - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
 - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for L1-RSRP measurement and CSI-RS. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

For FR2, when the SSB for L1-RSRP measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for L1-RSRP measurement and CSI-RS. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

9.5.5.2 Measurement restriction for CSI-RS based L1-RSRP

For both FR1 and FR2, when the CSI-RS for L1-RSRP measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for L1-RSRP measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for L1-RSRP measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for L1-RSRP measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS measurement without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for L1-RSRP measurement and SSB. Longer measurement period for CSI-RS based L1-RSRP measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for L1-RSRP measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for L1-RSRP measurement without any restriction.

For FR2, when the CSI-RS for L1-RSRP measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD or L1-RSRP measurement on the same CC or different CCs in the same band, or in the same symbol as SSB for CBD measurement on the same CC or different CCs in the same band when beam failure is detected, UE is required to measure one of but not both CSI-RS for L1-RSRP measurement and SSB. Longer measurement period for CSI-RS based L1-RSRP measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS for L1-RSRP measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band,

- In the following cases, UE is required to measure one of but not both CSI-RS for L1-RSRP measurement and the other CSI-RS. Longer measurement period for CSI-RS based L1-RSRP measurement is expected, and no requirements are defined.
 - The CSI-RS for L1-RSRP measurement or the other CSI-RS in a resource set configured with repetition ON, or
 - The other CSI-RS is configured in q1 and beam failure is detected, or
 - The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,

- Otherwise, UE shall be able to measure the CSI-RS for L1-RSRP measurement without any restriction.

9.5.6 Scheduling availability of UE during L1-RSRP measurement

Scheduling availability restrictions when the UE is performing L1-RSRP measurement are described in the following clauses.

9.5.6.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to L1-RSRP measurement performed on SSB and CSI-RS configured as RS for L1-RSRP measurement with the same SCS as PDSCH/PDCCH in FR1.

9.5.6.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-RSRP measurement based on SSB as RS for L1-RSRP measurement. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-RSRP measurement based on SSB configured for L1-RSRP measurement.

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on symbols corresponding to the SSB indexes configured for L1-RSRP measurement.

When intra-band carrier aggregation in FR1 is configured, the scheduling restrictions on serving cell where L1-RSRP measurement is performed apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols. When inter-band carrier aggregation within FR1 is configured, there are no scheduling restrictions on FR1 serving cell(s) configured in other bands than the bands in which the serving cell where L1-RSRP measurement is performed is configured.

9.5.6.3 Scheduling availability of UE performing L1-RSRP measurement on FR2

The following scheduling restriction applies due to L1-RSRP measurement.

- For the case where RS for L1-RSRP measurement is CSI-RS which is QCLed with active TCI state for PDCCH/PDSCH and not in a CSI-RS resource set with repetition ON, and N=1 applies as specified in clause 9.5.4.2
 - There are no scheduling restrictions due to L1-RSRP measurement performed based on the CSI-RS.
- Otherwise
 - The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on
 - symbols corresponding to the SSB indexes configured for L1-RSRP measurement, and/or
 - symbols corresponding to the periodic CSI-RS resource configured for L1-RSRP measurement, and/or
 - symbols corresponding to the semi-persistent CSI-RS resource configured for L1-RSRP measurement when the resource is activated, and/or
 - symbols corresponding to the aperiodic CSI-RS resource configured for L1-RSRP measurement when the reporting is triggered.

When intra-band carrier aggregation is performed, the scheduling restrictions on serving cell where L1-RSRP measurement is performed apply to all serving cells in the band on the symbols that fully or partially overlap with restricted symbols.

If following conditions are met,

- UE has been notified about system information update through paging,

- The gap between UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for L1-RSRP measurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for L1-RSRP measurement.

9.5.6.4 Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA

There are no scheduling restrictions on FR1 serving cell(s) due to L1-RSRP measurement performed on FR2 serving cell(s).

There are no scheduling restrictions on FR2 serving cell(s) due to L1-RSRP measurement performed on FR1 serving cell(s).

9.6 NE-DC: Measurements

9.6.1 Introduction

This clause contains requirements for UE supporting dual connectivity with NR PCell and E-UTRA FDD or TDD PSCell. The requirements apply to UEs that have been configured with NE-DC.

9.6.2 SFTD Measurements

9.6.2.1 Introduction

This clause contains requirements on UE capabilities for reporting of SFN and frame time difference between NR PCell and E-UTRA PSCell in RRC_CONNECTED state. The requirements comprise measurement reporting delay and measurement accuracy. The overall measurement reporting delay includes a RRC procedure delay specified in TS 38.331 [2], and the SFTD measurement reporting delay specified below.

9.6.2.2 SFTD Measurement requirements

When no DRX is used in either of the NR PCell and E-UTRA PSCell, the physical layer measurement period of the SFTD measurement shall be $T_{\text{measure_SFTD1}} = \max(0.2, 5 * \text{SMTC period})$ s.

When DRX is used in either of the NR PCell or the E-UTRA PSCell, or in both PCell and PSCell, the physical layer measurement period ($T_{\text{measure_SFTD1}}$) of the SFTD measurement shall be as specified in Table 9.6.2.2-1.

Table 9.6.2.2-1: SFTD measurement requirement when DRX is used

| DRX cycle length (s) ^{Note2} | $T_{\text{measure_SFTD1}}$ (s) |
|---------------------------------------|---|
| DRX cycle ≤ 0.04 | $\max(0.2, 5 \times \text{SMTC period})$ (Note1) |
| $0.04 < \text{DRX cycle} \leq 0.32$ | $8 \times \max(\text{DRX cycle}, \text{SMTC period})$ |
| $0.32 < \text{DRX cycle} \leq 10.24$ | $5 \times \text{DRX cycle}$ |
| Note1: | Number of DRX cycles depends upon the DRX cycle in use |
| Note2: | DRX cycle length in this table refers to the DRX cycle length configured for PCell or PSCell. When DRX is used in both PCell and PSCell, DRX cycle length in this table refers to the longer of the DRX cycle lengths for PCell and PSCell. |

If PSCell is changed without changing carrier frequency of PSCell while the UE is performing SFTD measurements, the UE shall still meet SFTD measurement and accuracy requirements for the new PSCell. In this case the UE shall

restart the SFTD measurement, and the total physical layer measurement period shall not exceed $T_{\text{measure_SFTD2}}$ as defined by the following expression:

$$T_{\text{measure_SFTD2}} = (M+1) \cdot (T_{\text{measure_SFTD1}}) + M \cdot T_{\text{PSCell_change_NEDC}}$$

where:

M is the number of times the E-UTRA PSCell is changed over the measurement period ($T_{\text{measure_SFTD2}}$), and

$T_{\text{PSCell_change_NEDC}}$ is the time necessary to change the PSCell; it can be up to 25 ms.

If PCell is changed, or if PSCell is changed to a different carrier frequency, the UE shall terminate the SFTD measurement.

The measurement accuracy for the SFTD measurement when DRX is used as well as when no DRX is used shall be as specified in clause 10.1.21.1.

10 Measurement Performance requirements

10.1 NR measurements

10.1.1 Introduction

The requirements in clause 10.1 apply as follows:

- intra-frequency requirements apply for PCell measurements in SA, NR-DC, or NE-DC operation mode,
- intra-frequency requirements apply for PSCell measurements in NR-DC or EN-DC operation mode,
- intra-frequency requirements apply for SCell measurements in SA operation mode with NR CA or any MR-DC operation mode with NR CA,
- inter-frequency requirements apply for non-serving cell measurements on NR carrier frequencies,
- inter-frequency requirements apply for measurements from one cell on a frequency compared to the measurement from another cell on a different frequency.

In the requirements of clause 10.1, the exceptions for side conditions apply as follows:

- for the UE capable of CA but not configured with any SCell, the applicable exceptions for side conditions are specified in Annex B, clause B.3.2.1 for UE supporting CA in FR1, and clause B.3.2.3 for UE supporting CA in FR2, respectively;
- for the UE capable of CA and configured with at least one SCell, the applicable exceptions for side conditions are specified in Annex B, clause B.3.2.2 for UE configured with CA in FR1, and clause B.3.2.4 for UE supporting CA in FR2 respectively;
- for the UE capable of SUL but not configured with SUL, the applicable exceptions for side conditions are specified in Annex B, clause B.3.4.1 for UE supporting SUL in FR1;
- for the UE capable of SUL and configured with at least one SUL, the applicable exceptions for side conditions are specified in Annex B, clause B.3.4.2 for UE configured with SUL in FR1.

10.1.2 Intra-frequency RSRP accuracy requirements for FR1

10.1.2.1 Intra-frequency SS-RSRP accuracy requirements

10.1.2.1.1 Absolute SS-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on the same frequency as that of the serving cell in FR1.

The accuracy requirements in Table 10.1.2.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.

Table 10.1.2.1.1-1: SS-RSRP Intra frequency absolute accuracy in FR1

| Accuracy | | Conditions | | | | | |
|------------------|-------------------|----------------------------|--|------------------------------|------------------------------|----------------------------|----------------------------|
| Normal condition | Extreme condition | SSB \hat{E}_s/lot | I_o ^{Note 1} range | | | | |
| | | | NR operating band groups ^{Note 2} | Minimum I_o | | Maximum I_o | |
| dB | dB | dB | | dBm / SCS_{SSB} | | dBm/ BW_{Channel} | dBm/ BW_{Channel} |
| | | | | $SCS_{SSB} = 15 \text{ kHz}$ | $SCS_{SSB} = 30 \text{ kHz}$ | | |
| ± 4.5 | ± 9 | $\geq 6 \text{ dB}$ | NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A | -121 | -118 | N/A | -70 |
| | | | NR_FDD_FR1_B | -120.5 | -117.5 | N/A | -70 |
| | | | NR_TDD_FR1_C | -120 | -117 | N/A | -70 |
| | | | NR_FDD_FR1_D, NR_TDD_FR1_D | -119.5 | -116.5 | N/A | -70 |
| | | | NR_FDD_FR1_E, NR_TDD_FR1_E | -119 | -116 | N/A | -70 |
| | | | NR_FDD_FR1_G | -118 | -115 | N/A | -70 |
| | | | NR_FDD_FR1_H | -117.5 | -114.5 | N/A | -70 |
| ± 8 | ± 11 | $\geq 6 \text{ dB}$ | NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_G, NR_FDD_FR1_H | N/A | N/A | -70 | -50 |

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.
 NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.2.1.2 Relative SS-RSRP Accuracy

The relative accuracy of SS-RSRP is defined as the SS-RSRP measured from one cell compared to the SS-RSRP measured from another cell on the same frequency, or between any two SS-RSRP levels measured on the same cell in FR1.

The accuracy requirements in Table 10.1.2.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.

Table 10.1.2.1.2-1: SS-RSRP Intra frequency relative accuracy in FR1

| Accuracy | | Conditions | | | | | |
|------------------|-------------------|--------------------------------------|--|------------------------------|------------------------------|----------------------------|----------------------------|
| Normal condition | Extreme condition | SSB \hat{E}_s/lot Note 2 | NR operating band groups Note 4 | l_o Note 1 range | | | |
| | | | | Minimum l_o | | Maximum l_o | |
| dB | dB | dB | | dBm / SCS_{SSB} | | dBm/ BW_{Channel} | dBm/ BW_{Channel} |
| | | | | $SCS_{SSB} = 15 \text{ kHz}$ | $SCS_{SSB} = 30 \text{ kHz}$ | | |
| ± 2 | ± 3 | $\geq 3 \text{ dB}$ | NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A | -121 | -118 | N/A | -50 |
| | | | NR_FDD_FR1_B | -120.5 | -117.5 | N/A | -50 |
| | | | NR_TDD_FR1_C | -120 | -117 | N/A | -50 |
| | | | NR_FDD_FR1_D, NR_TDD_FR1_D | -119.5 | -116.5 | N/A | -50 |
| | | | NR_FDD_FR1_E, NR_TDD_FR1_E | -119 | -116 | N/A | -50 |
| | | | NR_FDD_FR1_G | -118 | -115 | N/A | -50 |
| | | | NR_FDD_FR1_H | -117.5 | -114.5 | N/A | -50 |
| ± 3 | ± 3 | $\geq 6 \text{ dB}$ | Note 3 | Note 3 | Note 3 | N/A | Note 3 |

NOTE 1: l_o is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB \hat{E}_s/lot is the minimum SSB \hat{E}_s/lot of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same l_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.2.2 Void

10.1.3 Intra-frequency RSRP accuracy requirements for FR2

10.1.3.1 Intra-frequency SS-RSRP accuracy requirements

10.1.3.1.1 Absolute SS-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on the same frequency as that of the serving cell in FR2.

The accuracy requirements in Table 10.1.3.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.3.1.1-1: SS-RSRP Intra frequency absolute accuracy in FR2

| Accuracy | | Conditions | | | |
|--|-------------------|----------------------------|--|-----------------------------|---------------------|
| Normal condition | Extreme condition | SSB \hat{E}_s/lot | I_o ^{Note 2} range | | Maximum I_o |
| | | | Minimum I_o | | |
| dB | dB | dB | dBm / SCS_{SSB} ^{Note 1} | | dBm/ $BW_{Channel}$ |
| | | | $SCS_{SSB} = 120\text{kHz}$ | $SCS_{SSB} = 240\text{kHz}$ | |
| ± 6 | ± 9 | ≥ -6 | Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival | | N/A |
| ± 8 | ± 11 | | N/A | | -70 |
| Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. Note 2: I_o specified at the Reference point, and assumed to have constant EPRE across the bandwidth. Note 3: In the test cases, the SSB \hat{E}_s/lot and related parameters may need to be adjusted to ensure \hat{E}_s/lot at UE baseband is above the value defined in this table. | | | | | |

10.1.3.1.2 Relative SS-RSRP Accuracy

The relative accuracy of SS-RSRP is defined as the SS-RSRP measured from one cell compared to the SS-RSRP measured from another cell on the same frequency, or between any two SS-RSRP levels measured on the same cell in FR2.

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.3.1.2-1: SS-RSRP Intra frequency relative accuracy in FR2

| Accuracy | | Conditions | | | |
|---|-------------------|----------------------------|--|-----------------------------|---------------------|
| Normal condition | Extreme condition | SSB \hat{E}_s/lot | I_o ^{Note 2} range | | Maximum I_o |
| | | | Minimum I_o | | |
| dB | dB | dB | dBm / SCS_{SSB} ^{Note 1} | | dBm/ $BW_{Channel}$ |
| | | | $SCS_{SSB} = 120\text{kHz}$ | $SCS_{SSB} = 240\text{kHz}$ | |
| ± 6 | ± 9 | ≥ -6 | Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival | | -50 |
| Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. Note 2: I_o specified at the Reference point, and assumed to have constant EPRE across the bandwidth. Note 3: In the test cases, the SSB \hat{E}_s/lot and related parameters may need to be adjusted to ensure \hat{E}_s/lot at UE baseband is above the value defined in this table. Note 4: The parameter SSB \hat{E}_s/lot is the minimum SSB \hat{E}_s/lot of the pair of cells to which the requirement applies. | | | | | |

10.1.3.2 Void

10.1.4 Inter-frequency RSRP accuracy requirements for FR1

10.1.4.1 Inter-frequency SS-RSRP accuracy requirements

10.1.4.1.1 Absolute Accuracy of SS-RSRP in FR1

The requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.4.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.

Table 10.1.4.1.1-1: SS-RSRP Inter frequency Absolute accuracy in FR1

| Accuracy | | Conditions | | | | | |
|------------------|-------------------|-----------------------------------|--|------------------------------|--------|---------------|---------------------|
| Normal condition | Extreme condition | SSB \hat{E}_s/lot Note 2 | I_o Note 1 range | | | | |
| | | | NR operating band groups Note 3 | Minimum I_o | | Maximum I_o | |
| dB | dB | dB | | dBm / SCS_{SSB} | | | dBm/ $BW_{Channel}$ |
| | | | $SCS_{SSB} = 15 \text{ kHz}$ | $SCS_{SSB} = 30 \text{ kHz}$ | | | |
| ± 4.5 | ± 9 | $\geq -6 \text{ dB}$ | NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A | -121 | -118 | N/A | -70 |
| | | | NR_FDD_FR1_B | -120.5 | -117.5 | N/A | -70 |
| | | | NR_TDD_FR1_C | -120 | -117 | N/A | -70 |
| | | | NR_FDD_FR1_D, NR_TDD_FR1_D | -119.5 | -116.5 | N/A | -70 |
| | | | NR_FDD_FR1_E, NR_TDD_FR1_E | -119 | -116 | N/A | -70 |
| | | | NR_FDD_FR1_G | -118 | -115 | N/A | -70 |
| | | | NR_FDD_FR1_H | -117.5 | -114.5 | N/A | -70 |
| ± 8 | ± 11 | $\geq -6 \text{ dB}$ | NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_G, NR_FDD_FR1_H | N/A | N/A | -70 | -50 |

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.
 NOTE 2: Void
 NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.4.1.2 Relative Accuracy of SS-RSRP in FR1

The relative accuracy of SS-RSRP in inter frequency case is defined as the RSRP measured from one cell on a frequency in FR1 compared to the RSRP measured from another cell on a different frequency in FR1.

The accuracy requirements in Table 10.1.4.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] Clause 7.3 for reference sensitivity are fulfilled.

- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- $|\text{SSB_RP1}_{\text{dBm}} - \text{SSB_RP2}_{\text{dBm}}| \leq 27 \text{ dB}$
- $|\text{Channel 1_Io} - \text{Channel 2_Io}| \leq 20 \text{ dB}$

Table 10.1.4.1.2-1: SS-RSRP Inter frequency relative accuracy in FR1

| Accuracy | | Conditions | | | | | |
|------------------|-------------------|--------------------------------------|--|-------------------------------------|--------|---------------|----------------------------|
| Normal condition | Extreme condition | SSB \hat{E}_s/lot Note 2 | I_o ^{Note 1} range | | | | |
| | | | NR operating band groups Note 3 | Minimum I_o | | Maximum I_o | |
| dB | dB | dB | | dBm / SCS_{SSB} | | | dBm/ BW_{Channel} |
| | | | $SCS_{\text{SSB}} = 15 \text{ kHz}$ | $SCS_{\text{SSB}} = 30 \text{ kHz}$ | | | |
| ± 4.5 | ± 6 | $\geq 6 \text{ dB}$ | NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A | -121 | -118 | N/A | -50 |
| | | | NR_FDD_FR1_B | -120.5 | -117.5 | N/A | -50 |
| | | | NR_TDD_FR1_C | -120 | -117 | N/A | -50 |
| | | | NR_FDD_FR1_D, NR_TDD_FR1_D | -119.5 | -116.5 | N/A | -50 |
| | | | NR_FDD_FR1_E, NR_TDD_FR1_E | -119 | -116 | N/A | -50 |
| | | | NR_FDD_FR1_G | -118 | -115 | N/A | -50 |
| | | | NR_FDD_FR1_H | -117.5 | -114.5 | N/A | -50 |

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB \hat{E}_s/lot is the minimum SSB \hat{E}_s/lot of the pair of cells to which the requirement applies.
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.4.2 Void

10.1.5 Inter-frequency RSRP accuracy requirements for FR2

10.1.5.1 Inter-frequency SS-RSRP accuracy requirements

10.1.5.1.1 Absolute SS-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on a frequency in FR2 that is on a different frequency than the serving cell.

The accuracy requirements in Table 10.1.5.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.5.1.1-1: SS-RSRP Inter frequency absolute accuracy in FR2

| Accuracy | | Conditions | | | |
|--|-------------------|----------------------------|---|-----------------------------|---------------------|
| Normal condition | Extreme condition | SSB \hat{E}_s/lot | I_o ^{Note 2} range | | |
| | | | Minimum I_o | | Maximum I_o |
| dB | dB | dB | dBm / SCS_{SSB} ^{Note 1} | | dBm/ $BW_{Channel}$ |
| | | | $SCS_{SSB} = 120\text{kHz}$ | $SCS_{SSB} = 240\text{kHz}$ | |
| ± 6 | ± 9 | ≥ -4 | Same value as SSB_RP in Table B.2.3-2, according to UE Power class, operating band and angle of arrival | | N/A |
| ± 8 | ± 11 | | N/A | | -70 |
| Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. Note 2: I_o specified at the Reference point, and assumed to have constant EPRE across the bandwidth. Note 3: In the test cases, the SSB \hat{E}_s/lot and related parameters may need to be adjusted to ensure \hat{E}_s/lot at UE baseband is above the value defined in this table. | | | | | |

10.1.5.1.2 Relative SS-RSRP Accuracy

The relative accuracy of SS-RSRP is defined as the SS-RSRP measured from one cell on a frequency in FR2 compared to the SS-RSRP measured from another cell on another frequency in FR2.

The accuracy requirements in Table 10.1.5.1.2-1 are valid under the following conditions:

- Conditions defined in 38.101-2 [19] Clause 7.3 for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- $|\text{SSB_RP1}_{\text{dBm}} - \text{SSB_RP2}_{\text{dBm}}| \leq 27\text{dB}$
- $|\text{Channel 1}_{I_o} - \text{Channel 2}_{I_o}| \leq 20\text{ dB}$
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.5.1.2-1: SS-RSRP Inter frequency relative accuracy in FR2

| Accuracy | | Conditions | | | |
|---|-------------------|----------------------------|---|-----------------------------|---------------------|
| Normal condition | Extreme condition | SSB \hat{E}_s/lot | I_o ^{Note 2} range | | |
| | | | Minimum I_o | | Maximum I_o |
| dB | dB | dB | dBm / SCS_{SSB} ^{Note 1} | | dBm/ $BW_{Channel}$ |
| | | | $SCS_{SSB} = 120\text{kHz}$ | $SCS_{SSB} = 240\text{kHz}$ | |
| ± 6 | ± 9 | ≥ -4 | Same value as SSB_RP in Table B.2.3-2, according to UE Power class, operating band and angle of arrival | | -50 |
| Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. Note 2: I_o specified at the Reference point, and assumed to have constant EPRE across the bandwidth. Note 3: In the test cases, the SSB \hat{E}_s/lot and related parameters may need to be adjusted to ensure \hat{E}_s/lot at UE baseband is above the value defined in this table. Note 4: The parameter SSB \hat{E}_s/lot is the minimum SSB \hat{E}_s/lot of the pair of cells to which the requirement applies. | | | | | |

10.1.5.2 Void

10.1.6 RSRP Measurement Report Mapping

The reporting range of SS-RSRP for L3 reporting is defined from -156 dBm to -31 dBm with 1 dB resolution. The reporting range of SS-RSRP and CSI-RSRP for L1 reporting is defined from -140 to -44 dBm with 1 dB resolution.

The mapping of measured quantity is defined in Table 10.1.6.1-1. The range in the signalling may be larger than the guaranteed accuracy range.

The reporting range of differential SS-RSRP and CSI-RSRP for L1 reporting is defined from 0 dBm to -30 dB with 2 dB resolution.

The mapping of measured quantity is defined in Table 10.1.6.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 10.1.6.1-1: SS-RSRP and CSI-RSRP measurement report mapping

| Reported value | Measured quantity value (L3 SS-RSRP) | Measured quantity value (L1 SS-RSRP and CSI-RSRP) | Unit |
|--------------------|---|---|------|
| RSRP_0 | SS-RSRP<-156 | Not valid | dBm |
| RSRP_1 | -156 ≤ SS-RSRP<-155 | Not valid | dBm |
| RSRP_2 | -155 ≤ SS-RSRP<-154 | Not valid | dBm |
| RSRP_3 | -154 ≤ SS-RSRP<-153 | Not valid | dBm |
| RSRP_4 | -153 ≤ SS-RSRP<-152 | Not valid | dBm |
| RSRP_5 | -152 ≤ SS-RSRP<-151 | Not valid | dBm |
| RSRP_6 | -151 ≤ SS-RSRP<-150 | Not valid | dBm |
| RSRP_7 | -150 ≤ SS-RSRP<-149 | Not valid | dBm |
| RSRP_8 | -149 ≤ SS-RSRP<-148 | Not valid | dBm |
| RSRP_9 | -148 ≤ SS-RSRP<-147 | Not valid | dBm |
| RSRP_10 | -147 ≤ SS-RSRP<-146 | Not valid | dBm |
| RSRP_11 | -146 ≤ SS-RSRP<-145 | Not valid | dBm |
| RSRP_12 | -145 ≤ SS-RSRP<-144 | Not valid | dBm |
| RSRP_13 | -144 ≤ SS-RSRP<-143 | Not valid | dBm |
| RSRP_14 | -143 ≤ SS-RSRP<-142 | Not valid | dBm |
| RSRP_15 | -142 ≤ SS-RSRP<-141 | Not valid | dBm |
| RSRP_16 | -141 ≤ SS-RSRP<-140 | RSRP<-140 | dBm |
| RSRP_17 | -140 ≤ SS-RSRP<-139 | -140 ≤ RSRP<-139 | dBm |
| RSRP_18 | -139 ≤ SS-RSRP<-138 | -139 ≤ RSRP<-138 | dBm |
| ... | ... | | ... |
| RSRP_111 | -46 ≤ SS-RSRP<-45 | -46 ≤ RSRP<-45 | dBm |
| RSRP_112 | -45 ≤ SS-RSRP<-44 | -45 ≤ RSRP<-44 | dBm |
| RSRP_113 | -44 ≤ SS-RSRP<-43 | -44 ≤ RSRP | dBm |
| RSRP_114 | -43 ≤ SS-RSRP<-42 | Not valid | dBm |
| RSRP_115 | -42 ≤ SS-RSRP<-41 | Not valid | dBm |
| RSRP_116 | -41 ≤ SS-RSRP<-40 | Not valid | dBm |
| RSRP_117 | -40 ≤ SS-RSRP<-39 | Not valid | dBm |
| RSRP_118 | -39 ≤ SS-RSRP<-38 | Not valid | dBm |
| RSRP_119 | -38 ≤ SS-RSRP<-37 | Not valid | dBm |
| RSRP_120 | -37 ≤ SS-RSRP<-36 | Not valid | dBm |
| RSRP_121 | -36 ≤ SS-RSRP<-35 | Not valid | dBm |
| RSRP_122 | -35 ≤ SS-RSRP<-34 | Not valid | dBm |
| RSRP_123 | -34 ≤ SS-RSRP<-33 | Not valid | dBm |
| RSRP_124 | -33 ≤ SS-RSRP<-32 | Not valid | dBm |
| RSRP_125 | -32 ≤ SS-RSRP<-31 | Not valid | dBm |
| RSRP_126 | -31 ≤ SS-RSRP | Not valid | dBm |
| RSRP_127 (Note) | Infinity | Infinity | dBm |
| Note: | The value of RSRP_127 is applicable for RSRP threshold configured by the network as defined in TS 38.331 [2], but not for the purpose of measurement reporting. | | |

Table 10.1.6.1-2: Differential SS-RSRP and CSI-RSRP measurement (for L1 reporting) report mapping

| Reported value | Measured quantity value (difference in measured RSRP from strongest RSRP) | Unit |
|----------------|---|------|
| DIFFRSRP_0 | $0 \geq \Delta \text{RSRP} > -2$ | dB |
| DIFFRSRP_1 | $-2 \geq \Delta \text{RSRP} > -4$ | dB |
| DIFFRSRP_2 | $-4 \geq \Delta \text{RSRP} > -6$ | dB |
| DIFFRSRP_3 | $-6 \geq \Delta \text{RSRP} > -8$ | dB |
| DIFFRSRP_4 | $-8 \geq \Delta \text{RSRP} > -10$ | dB |
| DIFFRSRP_5 | $-10 \geq \Delta \text{RSRP} > -12$ | dB |
| DIFFRSRP_6 | $-12 \geq \Delta \text{RSRP} > -14$ | dB |
| DIFFRSRP_7 | $-14 \geq \Delta \text{RSRP} > -16$ | dB |
| DIFFRSRP_8 | $-16 \geq \Delta \text{RSRP} > -18$ | dB |
| DIFFRSRP_9 | $-18 \geq \Delta \text{RSRP} > -20$ | dB |
| DIFFRSRP_10 | $-20 \geq \Delta \text{RSRP} > -22$ | dB |
| DIFFRSRP_11 | $-22 \geq \Delta \text{RSRP} > -24$ | dB |
| DIFFRSRP_12 | $-24 \geq \Delta \text{RSRP} > -26$ | dB |
| DIFFRSRP_13 | $-26 \geq \Delta \text{RSRP} > -28$ | dB |
| DIFFRSRP_14 | $-28 \geq \Delta \text{RSRP} > -30$ | dB |
| DIFFRSRP_15 | $-30 \geq \Delta \text{RSRP}$ | dB |

10.1.7 Intra-frequency RSRQ accuracy requirements for FR1

10.1.7.1 Intra-frequency SS-RSRQ accuracy requirements in FR1

10.1.7.1.1 Absolute SS-RSRQ Accuracy in FR1

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on the same frequency as that of the serving cell in FR1.

The accuracy requirements in Table 10.1.7.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.

Table 10.1.7.1.1-1: SS-RSRQ Intra frequency absolute accuracy in FR1

| Accuracy | | Conditions | | | | | |
|------------------|-------------------|------------|--|-----------------------------|-----------------------------|---------------------------|---------------------------|
| Normal condition | Extreme condition | SSB Es/lot | NR operating band groups ^{Note 3} | Io ^{Note 1} range | | | |
| | | | | Minimum Io | | Maximum Io | |
| dB | dB | dB | | dBm / SCS _{SSB} | | dBm/BW _{Channel} | dBm/BW _{Channel} |
| | | | | SCS _{SSB} = 15 kHz | SCS _{SSB} = 30 kHz | | |
| ±2.5 | ±4 | ≥-3 dB | NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A | -121 | -118 | N/A | -50 |
| | | | NR_FDD_FR1_B | -120.5 | -117.5 | N/A | -50 |
| | | | NR_TDD_FR1_C | -120 | -117 | N/A | -50 |
| | | | NR_FDD_FR1_D, NR_TDD_FR1_D | -119.5 | -116.5 | N/A | -50 |
| | | | NR_FDD_FR1_E, NR_TDD_FR1_E | -119 | -116 | N/A | -50 |
| | | | NR_FDD_FR1_G | -118 | -115 | N/A | -50 |
| | | | NR_FDD_FR1_H | -117.5 | -114.5 | N/A | -50 |
| ±3.5 | ±4 | ≥-6 dB | Note 2 | Note 2 | Note 2 | Note 2 | Note 2 |

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.8 Intra-frequency RSRQ accuracy requirements for FR2

10.1.8.1 Intra-frequency SS-RSRQ accuracy requirements in FR2

10.1.8.1.1 Absolute SS-RSRQ Accuracy in FR2

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on the same frequency as that of the serving cell in FR2.

The accuracy requirements in Table 10.1.8.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.8.1.1-1: SS-RSRQ Intra frequency absolute accuracy in FR2

| Accuracy | | Conditions | | | |
|--|-------------------|----------------------------|---|-----------------------------|----------------------------|
| Normal condition | Extreme condition | SSB \hat{E}_s/lot | l_o ^{Note 2} range | | Maximum l_o |
| | | | Minimum l_o | | |
| dB | dB | dB | dBm / SCS_{SSB} ^{Note 1} | | dBm/ BW_{channel} |
| | | | $SCS_{SSB} = 120\text{kHz}$ | $SCS_{SSB} = 240\text{kHz}$ | |
| ± 2.5 | ± 4 | ≥ -3 | Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival | | -50 |
| ± 3.5 | ± 4 | ≥ -6 | | | |
| Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. Note 2: l_o specified at the Reference point, and assumed to have constant EPRE across the bandwidth. Note 3: In the test cases, the SSB \hat{E}_s/lot and related parameters may need to be adjusted to ensure \hat{E}_s/lot at UE baseband is above the value defined in this table. | | | | | |

10.1.9 Inter-frequency RSRQ accuracy requirements for FR1

10.1.9.1 Inter-frequency SS-RSRQ accuracy requirements in FR1

10.1.9.1.1 Absolute Accuracy of SS-RSRQ in FR1

The requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.9.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.

Table 10.1.9.1.1-1: SS-RSRQ Inter frequency absolute accuracy in FR1

| Accuracy | | Conditions | | | | | |
|---|-------------------|----------------------------|--|-----------------------------|--------|---------------|----------------------------|
| Normal condition | Extreme condition | SSB \hat{E}_s/lot | l_o ^{Note 1} range | | | | |
| | | | NR operating band groups ^{Note 3} | Minimum l_o | | Maximum l_o | |
| dB | dB | dB | | dBm / SCS_{SSB} | | | dBm/ BW_{channel} |
| | | | $SCS_{SSB} = 15\text{ kHz}$ | $SCS_{SSB} = 30\text{ kHz}$ | | | |
| ± 2.5 | ± 4 | $\geq -3\text{ dB}$ | NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A | -121 | -118 | N/A | -50 |
| | | | NR_FDD_FR1_B | -120.5 | -117.5 | N/A | -50 |
| | | | NR_TDD_FR1_C | -120 | -117 | N/A | -50 |
| | | | NR_FDD_FR1_D, NR_TDD_FR1_D | -119.5 | -116.5 | N/A | -50 |
| | | | NR_FDD_FR1_E, NR_TDD_FR1_E | -119 | -116 | N/A | -50 |
| | | | NR_FDD_FR1_G | -118 | -115 | N/A | -50 |
| | | | NR_FDD_FR1_H | -117.5 | -114.5 | N/A | -50 |
| ± 3.5 | ± 4 | $\geq -6\text{ dB}$ | Note 2 | Note 2 | Note 2 | Note 2 | Note 2 |
| NOTE 1: l_o is assumed to have constant EPRE across the bandwidth. NOTE 2: The same bands and the same l_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2. | | | | | | | |

10.1.9.1.2 Relative Accuracy of SS-RSRQ in FR1

The relative accuracy of SS-RSRQ in inter frequency case is defined as the RSRQ measured from one cell on a frequency in FR1 compared to the RSRP measured from another cell on a different frequency in FR1.

The accuracy requirements in Table 10.1.9.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- $|\text{SSB_RP1}_{\text{dBm}} - \text{SSB_RP2}_{\text{dBm}}| \leq 27 \text{ dB}$
- $|\text{Channel 1_Io} - \text{Channel 2_Io}| \leq 20 \text{ dB}$

Table 10.1.9.1.2-1: SS-RSRQ Inter frequency relative accuracy in FR1

| Accuracy | | Conditions | | | | | |
|------------------|-------------------|--------------------------------------|--|--|--------|---------------|-----------------------------------|
| Normal condition | Extreme condition | SSB \hat{E}_s/lot Note 2 | I_o Note 1 range | | | | |
| | | | NR operating band groups Note 4 | Minimum I_o | | Maximum I_o | |
| dB | dB | dB | | dBm / SCS_{SSB} | | | dBm/ $\text{BW}_{\text{Channel}}$ |
| | | | $\text{SCS}_{\text{SSB}} = 15 \text{ kHz}$ | $\text{SCS}_{\text{SSB}} = 30 \text{ kHz}$ | | | |
| ± 3 | ± 4 | $\geq -3 \text{ dB}$ | NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A | -121 | -118 | N/A | -50 |
| | | | NR_FDD_FR1_B | -120.5 | -117.5 | N/A | -50 |
| | | | NR_TDD_FR1_C | -120 | -117 | N/A | -50 |
| | | | NR_FDD_FR1_D, NR_TDD_FR1_D | -119.5 | -116.5 | N/A | -50 |
| | | | NR_FDD_FR1_E, NR_TDD_FR1_E | -119 | -116 | N/A | -50 |
| | | | NR_FDD_FR1_G | -118 | -115 | N/A | -50 |
| | | | NR_FDD_FR1_H | -117.5 | -114.5 | N/A | -50 |
| ± 4 | ± 4 | $\geq -6 \text{ dB}$ | Note 3 | Note 3 | Note 3 | Note 3 | Note 3 |

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB \hat{E}_s/lot is the minimum SSB \hat{E}_s/lot of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.10 Inter-frequency RSRQ accuracy requirements for FR2

10.1.10.1 Inter-frequency SS-RSRQ accuracy requirements in FR2

10.1.10.1.1 Absolute Accuracy of SS-RSRQ in FR2

The requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on a frequency in FR2 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.10.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.10.1.1-1: SS-RSRQ Inter frequency absolute accuracy in FR2

| Accuracy | | Conditions | | | |
|--|-------------------|----------------------------|---|-----------------------------|----------------------------|
| Normal condition | Extreme condition | SSB \hat{E}_s/lot | I_o ^{Note 2} range | | Maximum I_o |
| | | | Minimum I_o | | |
| dB | dB | dB | dBm / SCS_{SSB} ^{Note 1} | | dBm/ BW_{Channel} |
| | | | $SCS_{SSB} = 120\text{kHz}$ | $SCS_{SSB} = 240\text{kHz}$ | |
| ± 2.5 | ± 4 | ≥ -3 | Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival | | -50 |
| ± 3.5 | ± 4 | ≥ -4 | | | |
| Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. Note 2: I_o specified at the Reference point, and assumed to have constant EPRE across the bandwidth. Note 3: In the test cases, the SSB \hat{E}_s/lot and related parameters may need to be adjusted to ensure \hat{E}_s/lot at UE baseband is above the value defined in this table. | | | | | |

10.1.10.1.2 Relative Accuracy of SS-RSRQ in FR2

The relative accuracy of SS-RSRQ in inter frequency case is defined as the RSRQ measured from one cell on a frequency in FR2 compared to the RSRP measured from another cell on a different frequency in FR2.

The accuracy requirements in Table 10.1.10.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- $|\text{SSB_RP1}_{\text{dBm}} - \text{SSB_RP2}_{\text{dBm}}| \leq 27$ dB
- $|\text{Channel 1}_{I_o} - \text{Channel 2}_{I_o}| \leq 20$ dB
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.10.1.2-1: SS-RSRQ Inter frequency relative accuracy in FR2

| Accuracy | | Conditions | | | |
|---|-------------------|----------------------------|---|-----------------------------|----------------------------|
| Normal condition | Extreme condition | SSB \hat{E}_s/lot | I_o ^{Note 2} range | | Maximum I_o |
| | | | Minimum I_o | | |
| dB | dB | dB | dBm / SCS_{SSB} ^{Note 1} | | dBm/ BW_{Channel} |
| | | | $SCS_{SSB} = 120\text{kHz}$ | $SCS_{SSB} = 240\text{kHz}$ | |
| ± 3 | ± 4 | ≥ -3 | Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival | | -50 |
| ± 4 | ± 4 | ≥ -4 | | | |
| Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. Note 2: I_o specified at the Reference point, and assumed to have constant EPRE across the bandwidth. Note 3: The parameter SSB \hat{E}_s/lot is the minimum SSB \hat{E}_s/lot of the pair of cells to which the requirement applies. Note 4: In the test cases, the SSB \hat{E}_s/lot and related parameters may need to be adjusted to ensure \hat{E}_s/lot at UE baseband is above the value defined in this table. | | | | | |

10.1.11 RSRQ report mapping

10.1.11.1 SS-RSRQ measurement report mapping

The reporting range of SS-RSRQ is defined from -43 dB to 20 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 10.1.11.1-1. The range in the signalling may be larger than the guaranteed accuracy range.

Table 10.1.11.1-1: SS-RSRQ measurement report mapping

| Reported value | Measured quantity value | Unit |
|----------------|-----------------------------------|------|
| SS-RSRQ_0 | $SS\text{-RSRQ} < -43$ | dB |
| SS-RSRQ_1 | $-43 \leq SS\text{-RSRQ} < -42.5$ | dB |
| SS-RSRQ_2 | $-42.5 \leq SS\text{-RSRQ} < -42$ | dB |
| SS-RSRQ_3 | $-42 \leq SS\text{-RSRQ} < -41.5$ | dB |
| SS-RSRQ_4 | $-41.5 \leq SS\text{-RSRQ} < -41$ | dB |
| .. | .. | ... |
| SS-RSRQ_122 | $17.5 \leq SS\text{-RSRQ} < 18$ | dB |
| SS-RSRQ_123 | $18 \leq SS\text{-RSRQ} < 18.5$ | dB |
| SS-RSRQ_124 | $18.5 \leq SS\text{-RSRQ} < 19$ | dB |
| SS-RSRQ_125 | $19 \leq SS\text{-RSRQ} < 19.5$ | dB |
| SS-RSRQ_126 | $19.5 \leq SS\text{-RSRQ} < 20$ | dB |
| SS-RSRQ_127 | $20 \leq SS\text{-RSRQ}$ | dB |

10.1.12 Intra-frequency SINR accuracy requirements for FR1

10.1.12.1 Intra-frequency SS-SINR accuracy requirements in FR1

10.1.12.1.1 Absolute SS-SINR Accuracy in FR1

Unless otherwise specified, the requirements for absolute accuracy of SS-SINR in this clause apply to a cell on the same frequency as that of the serving cell in FR1.

The accuracy requirements in Table 10.1.12.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band.

Table 10.1.12.1.1-1: SS-SINR Intra frequency absolute accuracy in FR1

| Accuracy | | Conditions | | | | | |
|------------------|-------------------|--------------------------------------|--|------------------------------|------------------------------|----------------------------|----------------------------|
| Normal condition | Extreme condition | SSB \hat{E}_s/lot Note 3 | NR operating band groups Note 4 | I_o Note 1 range | | | |
| | | | | Minimum I_o | | Maximum I_o | |
| dB | dB | dB | | dBm / SCS_{SSB} | | dBm/ BW_{Channel} | dBm/ BW_{Channel} |
| | | | | $SCS_{SSB} = 15 \text{ kHz}$ | $SCS_{SSB} = 30 \text{ kHz}$ | | |
| ± 3.0 | ± 4 | $\geq 3 \text{ dB}$ | NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A | -121 | -118 | N/A | -50 |
| | | | NR_FDD_FR1_B | -120.5 | -117.5 | N/A | -50 |
| | | | NR_TDD_FR1_C | -120 | -117 | N/A | -50 |
| | | | NR_FDD_FR1_D, NR_TDD_FR1_D | -119.5 | -116.5 | N/A | -50 |
| | | | NR_FDD_FR1_E, NR_TDD_FR1_E | -119 | -116 | N/A | -50 |
| | | | NR_FDD_FR1_G | -118 | -115 | N/A | -50 |
| | | | NR_FDD_FR1_H | -117.5 | -114.5 | N/A | -50 |
| ± 3.5 | ± 4 | $\geq 6 \text{ dB}$ | Note 2 | Note 2 | Note 2 | Note 2 | Note 2 |

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: The requirements apply for SSB $\hat{E}_s/\text{lot} \leq 25 \text{ dB}$.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.13 Intra-frequency SINR accuracy requirements for FR2

10.1.13.1 Intra-frequency SS-SINR accuracy requirements in FR2

10.1.13.1.1 Absolute SS-SINR Accuracy in FR2

Unless otherwise specified, the requirements for absolute accuracy of SS-SINR in this clause apply to a cell on the same frequency as that of the serving cell in FR2.

The accuracy requirements in Table 10.1.13.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.13.1.1-1: SS-SINR Intra frequency absolute accuracy in FR2

| Accuracy | | Conditions | | | |
|---|-------------------|----------------------------|---|-----------------------------|----------------------------|
| Normal condition | Extreme condition | SSB \hat{E}_s/lot | I_o ^{Note 2} range | | Maximum I_o |
| | | | dBm / SCS_{SSB} ^{Note 1} | | |
| dB | dB | dB | dBm / SCS_{SSB} ^{Note 1} | | dBm/ BW_{Channel} |
| | | | $SCS_{SSB} = 120\text{kHz}$ | $SCS_{SSB} = 240\text{kHz}$ | |
| ± 3 | ± 4 | ≥ -3 | Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival | | -50 |
| ± 3.5 | ± 4 | ≥ -6 | | | |
| Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. Note 2: I_o specified at the Reference point, and assumed to have constant EPRE across the bandwidth. Note 3: In the test cases, the SSB \hat{E}_s/lot and related parameters may need to be adjusted to ensure \hat{E}_s/lot at UE baseband is above the value defined in this table. Note 4: The requirements apply for SSB $\hat{E}_s/\text{lot} \leq 25$ dB. | | | | | |

10.1.14 Inter-frequency SINR accuracy requirements for FR1

10.1.14.1 Inter-frequency SS-SINR accuracy requirements in FR1

10.1.14.1.1 Absolute Accuracy of SS-SINR in FR1

The requirements for absolute accuracy of SS-SINR in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.14.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band.

Table 10.1.14.1.1-1: SS-SINR Inter frequency absolute accuracy in FR1

| Accuracy | | Conditions | | | | | |
|--|-------------------|--|--|-------------------------------|-----------------------------|----------------------------|--------|
| Normal condition | Extreme condition | SSB \hat{E}_s/lot ^{Note 3} | NR operating band groups ^{Note 4} | I_o ^{Note 1} range | | Maximum I_o | |
| | | | | dBm / SCS_{SSB} | | | |
| dB | dB | dB | | dBm / SCS_{SSB} | | dBm/ BW_{Channel} | |
| | | | | $SCS_{SSB} = 15\text{ kHz}$ | $SCS_{SSB} = 30\text{ kHz}$ | | |
| ± 3.0 | ± 4 | ≥ -3 dB | NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A | -121 | -118 | N/A | -50 |
| | | | NR_FDD_FR1_B | -120.5 | -117.5 | N/A | -50 |
| | | | NR_TDD_FR1_C | -120 | -117 | N/A | -50 |
| | | | NR_FDD_FR1_D, NR_TDD_FR1_D | -119.5 | -116.5 | N/A | -50 |
| | | | NR_FDD_FR1_E, NR_TDD_FR1_E | -119 | -116 | N/A | -50 |
| | | | NR_FDD_FR1_G | -118 | -115 | N/A | -50 |
| ± 3.5 | ± 4 | ≥ -6 dB | NR_FDD_FR1_H | -117.5 | -114.5 | N/A | -50 |
| | | | Note 2 | Note 2 | Note 2 | Note 2 | Note 2 |
| NOTE 1: I_o is assumed to have constant EPRE across the bandwidth. NOTE 2: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 3: The requirements apply for SSB $\hat{E}_s/\text{lot} \leq 25$ dB. NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2. | | | | | | | |

10.1.14.1.2 Relative Accuracy of SS-SINR in FR1

The relative accuracy of SS-SINR in inter frequency case is defined as the SS-SINR measured from one cell on a frequency in FR1 compared to the SS-SINR measured from another cell on a different frequency in FR1.

The accuracy requirements in Table 10.1.14.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band.
- $|\text{SSB_RP1}_{\text{dBm}} - \text{SSB_RP2}_{\text{dBm}}| \leq 27 \text{ dB}$
- $|\text{Channel 1_Io} - \text{Channel 2_Io}| \leq 20 \text{ dB}$

Table 10.1.14.1.2-1: SS-SINR Inter frequency relative accuracy in FR1

| Accuracy | | Conditions | | | | | |
|------------------|-------------------|--|--|---|--------|---------------|-----------------------------------|
| Normal condition | Extreme condition | SSB \hat{E}_s/lot Note 2,4 | I_o Note 1 range | | | | |
| | | | NR operating band groups Note 5 | Minimum I_o | | Maximum I_o | |
| dB | dB | dB | | dBm / SCS_{SSB} | | | dBm/ $\text{BW}_{\text{Channel}}$ |
| | | | $\text{SCS}_{\text{SSB}} = 120 \text{ kHz}$ | $\text{SCS}_{\text{SSB}} = 240 \text{ kHz}$ | | | |
| ± 3.5 | ± 4 | $\geq -3 \text{ dB}$ | NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A | -121 | -118 | N/A | -50 |
| | | | NR_FDD_FR1_B | -120.5 | -117.5 | N/A | -50 |
| | | | NR_TDD_FR1_C | -120 | -117 | N/A | -50 |
| | | | NR_FDD_FR1_D, NR_TDD_FR1_D | -119.5 | -116.5 | N/A | -50 |
| | | | NR_FDD_FR1_E, NR_TDD_FR1_E | -119 | -116 | N/A | -50 |
| | | | NR_FDD_FR1_G | -118 | -115 | N/A | -50 |
| | | | NR_FDD_FR1_H | -117.5 | -114.5 | N/A | -50 |
| ± 4 | ± 4 | $\geq -6 \text{ dB}$ | Note 3 | Note 3 | Note 3 | Note 3 | Note 3 |

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB \hat{E}_s/lot is the minimum SSB \hat{E}_s/lot of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: The requirements apply for SSB $\hat{E}_s/\text{lot} \leq 25 \text{ dB}$.
NOTE 5: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.15 Inter-frequency SINR accuracy requirements for FR2

10.1.15.1 Inter-frequency SS-SINR accuracy requirements in FR2

10.1.15.1.1 Absolute Accuracy of SS-SINR in FR2

The requirements for absolute accuracy of SS-SINR in this clause apply to a cell on a frequency in FR2 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.15.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.15.1.1-1: SS-SINR Inter frequency absolute accuracy in FR2

| Accuracy | | Conditions | | | |
|--|-------------------|----------------------------|---|-----------------------------|----------------------------|
| Normal condition | Extreme condition | SSB \hat{E}_s/lot | I_o ^{Note 2} range | | Maximum I_o |
| | | | Minimum I_o | | |
| dB | dB | dB | dBm / SCS_{SSB} ^{Note 1} | | dBm/ BW_{channel} |
| | | | $SCS_{SSB} = 120\text{kHz}$ | $SCS_{SSB} = 240\text{kHz}$ | |
| ± 3 | ± 4 | ≥ -3 | Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival | | -50 |
| ± 3.5 | ± 4 | ≥ -4 | | | |
| Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. | | | | | |
| Note 2: I_o specified at the Reference point, and assumed to have constant EPRE across the bandwidth. | | | | | |
| Note 3: In the test cases, the SSB \hat{E}_s/lot and related parameters may need to be adjusted to ensure \hat{E}_s/lot at UE baseband is above the value defined in this table. | | | | | |
| Note 4: The requirements apply for SSB $\hat{E}_s/\text{lot} \leq 25$ dB. | | | | | |

10.1.15.1.2 Relative Accuracy of SS-SINR in FR2

The relative accuracy of SS-SINR in inter frequency case is defined as the SS-SINR measured from one cell on a frequency in FR2 compared to the SS-SINR measured from another cell on a different frequency in FR2.

The accuracy requirements in Table 10.1.15.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band.
- $|\text{SSB_RP1}_{\text{dBm}} - \text{SSB_RP2}_{\text{dBm}}| \leq 27$ dB
- $|\text{Channel 1}_{I_o} - \text{Channel 2}_{I_o}| \leq 20$ dB
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.15.1.2-1: SS-SINR Inter frequency relative accuracy in FR2

| Accuracy | | Conditions | | | |
|--|-------------------|----------------------------|---|-----------------------------|----------------------------|
| Normal condition | Extreme condition | SSB \hat{E}_s/lot | I_o ^{Note 2} range | | Maximum I_o |
| | | | Minimum I_o | | |
| dB | dB | dB | dBm / SCS_{SSB} ^{Note 1} | | dBm/ BW_{channel} |
| | | | $SCS_{SSB} = 120\text{kHz}$ | $SCS_{SSB} = 240\text{kHz}$ | |
| ± 3.5 | ± 4 | ≥ -3 | Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival | | -50 |
| ± 4 | ± 4 | ≥ -6 | | | |
| Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. | | | | | |
| Note 2: I_o specified at the Reference point, and assumed to have constant EPRE across the bandwidth. | | | | | |
| Note 3: The parameter SSB \hat{E}_s/lot is the minimum SSB \hat{E}_s/lot of the pair of cells to which the requirement applies. | | | | | |
| Note 4: In the test cases, the SSB \hat{E}_s/lot and related parameters may need to be adjusted to ensure \hat{E}_s/lot at UE baseband is above the value defined in this table. | | | | | |
| Note 5: The requirements apply for SSB $\hat{E}_s/\text{lot} \leq 25$ dB. | | | | | |

10.1.16 SINR report mapping

10.1.16.1 SS-SINR measurement report mapping

The reporting range of SS-SINR is defined from -23 dB to 40 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 10.1.16.1-1. The range in the signalling may be larger than the guaranteed accuracy range.

Table 10.1.16.1-1: SS-SINR measurement report mapping

| Reported value | Measured quantity value | Unit |
|----------------|----------------------------|------|
| SS-SINR_0 | $SS-SINR < -23$ | dB |
| SS-SINR_1 | $-23 \leq SS-SINR < -22.5$ | dB |
| SS-SINR_2 | $-22.5 \leq SS-SINR < -22$ | dB |
| SS-SINR_3 | $-22 \leq SS-SINR < -21.5$ | dB |
| SS-SINR_4 | $-21.5 \leq SS-SINR < -21$ | dB |
| .. | .. | ... |
| SS-SINR_123 | $38 \leq SS-SINR < 38.5$ | dB |
| SS-SINR_124 | $38.5 \leq SS-SINR < 39$ | dB |
| SS-SINR_125 | $39 \leq SS-SINR < 39.5$ | dB |
| SS-SINR_126 | $39.5 \leq SS-SINR < 40$ | dB |
| SS-SINR_127 | $40 \leq SS-SINR$ | dB |

10.1.17 Power Headroom

10.1.17.1 Power Headroom Report

10.1.17.1.1 Power Headroom Report Mapping

The power headroom reporting range is from -32 ...+38 dB. Table 10.1.17.1-1 defines the report mapping.

Table 10.1.17.1-1: Power headroom report mapping

| Reported value | Measured quantity value (dB) |
|-------------------|------------------------------|
| POWER_HEADROOM_0 | $PH < -32$ |
| POWER_HEADROOM_1 | $-32 \leq PH < -31$ |
| POWER_HEADROOM_2 | $-31 \leq PH < -30$ |
| POWER_HEADROOM_3 | $-30 \leq PH < -29$ |
| ... | ... |
| POWER_HEADROOM_53 | $20 \leq PH < 21$ |
| POWER_HEADROOM_54 | $21 \leq PH < 22$ |
| POWER_HEADROOM_55 | $22 \leq PH < 24$ |
| POWER_HEADROOM_56 | $24 \leq PH < 26$ |
| POWER_HEADROOM_57 | $26 \leq PH < 28$ |
| POWER_HEADROOM_58 | $28 \leq PH < 30$ |
| POWER_HEADROOM_59 | $30 \leq PH < 32$ |
| POWER_HEADROOM_60 | $32 \leq PH < 34$ |
| POWER_HEADROOM_61 | $34 \leq PH < 36$ |
| POWER_HEADROOM_62 | $36 \leq PH < 38$ |
| POWER_HEADROOM_63 | $PH \geq 38$ |

10.1.18 $P_{\text{CMAX},c,f}$

The UE is required to report the UE configured maximum output power ($P_{\text{CMAX},c,f}$) together with the power headroom. This clause defines the requirements for the $P_{\text{CMAX},c,f}$ reporting.

10.1.18.1 Report Mapping

The $P_{\text{CMAX},c,f}$ reporting range is defined from -29 dBm to 33 dBm with 1 dB resolution. Table 10.1.18.1-1 defines the reporting mapping.

Table 10.1.18.1-1 Mapping of $P_{\text{CMAX},c,f}$

| Reported value | Measured quantity value | Unit |
|----------------|--------------------------------------|------|
| PCMAX_C_00 | $P_{\text{CMAX},c,f} < -29$ | dBm |
| PCMAX_C_01 | $-29 \leq P_{\text{CMAX},c,f} < -28$ | dBm |
| PCMAX_C_02 | $-28 \leq P_{\text{CMAX},c,f} < -27$ | dBm |
| ... | ... | ... |
| PCMAX_C_61 | $31 \leq P_{\text{CMAX},c,f} < 32$ | dBm |
| PCMAX_C_62 | $32 \leq P_{\text{CMAX},c,f} < 33$ | dBm |
| PCMAX_C_63 | $33 \leq P_{\text{CMAX},c,f}$ | dBm |

10.1.19 L1-RSRP accuracy requirements for FR1

10.1.19.1 SSB based L1-RSRP accuracy requirements

10.1.19.1.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SSB based L1-RSRP in this clause apply to all SSBs of the serving cell configured for L1-RSRP measurement.

The accuracy requirements in Table 10.1.19.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.1 for a corresponding Band for each relevant SSB.

Table 10.1.19.1.1-1: SSB based L1-RSRP absolute accuracy in FR1

| Accuracy | | Conditions | | | | | |
|------------------|-------------------|----------------------------|---|-----------------------------------|------------------------------|---------------------|---------------------|
| Normal condition | Extreme condition | SSB \hat{E}_s/lot | NR operating band groups <small>Note 2</small> | I_o <small>Note 1</small> range | | | |
| | | | | Minimum I_o | | Maximum I_o | |
| dB | dB | dB | | dBm / SCS_{SSB} | | dBm/ $BW_{Channel}$ | dBm/ $BW_{Channel}$ |
| | | | | $SCS_{SSB} = 15 \text{ kHz}$ | $SCS_{SSB} = 30 \text{ kHz}$ | | |
| ± 5.0 | ± 9.5 | $\geq -3\text{dB}$ | NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A | -121 | -118 | N/A | -70 |
| | | | NR_FDD_FR1_B | -120.5 | -117.5 | N/A | -70 |
| | | | NR_TDD_FR1_C | -120 | -117 | N/A | -70 |
| | | | NR_FDD_FR1_D, NR_TDD_FR1_D | -119.5 | -116.5 | N/A | -70 |
| | | | NR_FDD_FR1_E, NR_TDD_FR1_E | -119 | -116 | N/A | -70 |
| | | | NR_FDD_FR1_G | -118 | -115 | N/A | -70 |
| | | | NR_FDD_FR1_H | -117.5 | -114.5 | N/A | -70 |
| ± 8.5 | ± 11.5 | $\geq -3\text{dB}$ | NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_G, NR_FDD_FR1_H, | N/A | N/A | -70 | -50 |

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.
 NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.19.1.2 Relative Accuracy

The relative accuracy of SSB based L1-RSRP is defined as the L1-RSRP measured from one SSB compared to the largest measured value of L1-RSRP among all SSBs of the serving cell.

The accuracy requirements in Table 10.1.19.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.1 for a corresponding Band for each relevant SSB.

Table 10.1.19.1.2-1: SSB based L1-RSRP relative accuracy in FR1

| Accuracy | | Conditions | | | | | |
|------------------|-------------------|------------------------------|--|----------------------|----------------------|---------------------|---------------------|
| Normal condition | Extreme condition | SSB $\hat{E}s/lot$ Note 2 | NR operating band groups Note 4 | Io Note 1 range | | | |
| | | | | Minimum Io | | Maximum Io | |
| dB | dB | dB | | dBm / SCS_{SSB} | | dBm/ $BW_{Channel}$ | dBm/ $BW_{Channel}$ |
| | | | | $SCS_{SSB} = 15$ kHz | $SCS_{SSB} = 30$ kHz | | |
| ± 3 | ± 4 | ≥ -3 dB | NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A | -121 | -118 | N/A | -50 |
| | | | NR_FDD_FR1_B | -120.5 | -117.5 | N/A | -50 |
| | | | NR_TDD_FR1_C | -120 | -117 | N/A | -50 |
| | | | NR_FDD_FR1_D, NR_TDD_FR1_D | -119.5 | -116.5 | N/A | -50 |
| | | | NR_FDD_FR1_E, NR_TDD_FR1_E | -119 | -116 | N/A | -50 |
| | | | NR_FDD_FR1_G | -118 | -115 | N/A | -50 |
| | | | NR_FDD_FR1_H | -117.5 | -114.5 | N/A | -50 |

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB $\hat{E}s/lot$ is the minimum SSB $\hat{E}s/lot$ of the pair of SSBs to which the requirement applies.
NOTE 3: Void
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2..

10.1.19.2 CSI-RS based L1-RSRP accuracy requirements

10.1.19.2.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RS based L1-RSRP in this clause apply to all CSI-RS resources of the serving cell configured for L1-RSRP measurement.

The accuracy requirements in Table 10.1.19.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.2 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.

The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.19.2.1-1.

Table 10.1.19.2.1-1: CSI-RS based L1-RSRP absolute accuracy in FR1

| Accuracy | | Conditions | | | | | | |
|------------------|-------------------|---------------------------------|--|-------------------------------|-------------------------|-------------------------|---------------------------|---------------------------|
| Normal condition | Extreme condition | CSI-RS \hat{E}_s/\hat{I}_{ot} | NR operating band groups ^{Note 2} | I_o ^{Note 1} range | | | Maximum I_o | |
| | | | | Minimum I_o | | | | |
| dB | dB | dB | | dBm / SCS_{CSI-RS} | | | dBm/BW _{Channel} | dBm/BW _{Channel} |
| | | | | $SCS_{CSI-RS} = 15$ kHz | $SCS_{CSI-RS} = 30$ kHz | $SCS_{CSI-RS} = 60$ kHz | | |
| ±5.0 | ±9.5 | ≥-3dB | NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A | -121 | -118 | -115 | N/A | -70 |
| | | | NR_FDD_FR1_B | -120.5 | -117.5 | -114.5 | N/A | -70 |
| | | | NR_TDD_FR1_C | -120 | -117 | -114 | N/A | -70 |
| | | | NR_FDD_FR1_D, NR_TDD_FR1_D | -119.5 | -116.5 | -113.5 | N/A | -70 |
| | | | NR_FDD_FR1_E, NR_TDD_FR1_E | -119 | -116 | -113 | N/A | -70 |
| | | | NR_FDD_FR1_G | -118 | -115 | -112 | N/A | -70 |
| | | | NR_FDD_FR1_H | -117.5 | -114.5 | -111.5 | N/A | -70 |
| ±8.5 | ±11.5 | ≥-3dB | NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_G, NR_FDD_FR1_H | N/A | N/A | N/A | -70 | -50 |

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.
 NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.19.2.2 Relative Accuracy

The relative accuracy of CSI-RS based L1-RSRP is defined as the L1-RSRP measured from one CSI-RS compared to the largest measured value of L1-RSRP among all CSI-RS resources of the serving cell.

The accuracy requirements in Table 10.1.19.2.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.2 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.

The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.19.2.2-1.

Table 10.1.19.2.2-1: CSI-RS based L1-RSRP relative accuracy in FR1

| Accuracy | | Conditions | | | | | | |
|------------------|-------------------|---------------------------------|--|-------------------------|-------------------------|-------------------------|---------------------|---------------------|
| Normal condition | Extreme condition | CSI-RS $\hat{E}s/lot$ Note 2 | NR operating band groups Note 4 | I_o Note 1 range | | | | |
| | | | | Minimum I_o | | | Maximum I_o | |
| dB | dB | dB | | dBm / SCS_{CSI-RS} | | | dBm/ $BW_{Channel}$ | dBm/ $BW_{Channel}$ |
| | | | | $SCS_{CSI-RS} = 15$ kHz | $SCS_{CSI-RS} = 30$ kHz | $SCS_{CSI-RS} = 60$ kHz | | |
| ± 3 | ± 4 | ≥ -3 dB | NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A | -121 | -118 | -115 | N/A | -50 |
| | | | NR_FDD_FR1_B | -120.5 | -117.5 | -114.5 | N/A | -50 |
| | | | NR_TDD_FR1_C | -120 | -117 | -114 | N/A | -50 |
| | | | NR_FDD_FR1_D, NR_TDD_FR1_D | -119.5 | -116.5 | -113.5 | N/A | -50 |
| | | | NR_FDD_FR1_E, NR_TDD_FR1_E | -119 | -116 | -113 | N/A | -50 |
| | | | NR_FDD_FR1_G | -118 | -115 | -112 | N/A | -50 |
| | | | NR_FDD_FR1_H | -117.5 | -114.5 | -111.5 | N/A | -50 |

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.
 NOTE 2: The parameter CSI-RS $\hat{E}s/lot$ is the minimum CSI-RS $\hat{E}s/lot$ of the pair of CSI-RS resources to which the requirement applies.
 NOTE 3: Void
 NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.20 L1-RSRP accuracy requirements for FR2

10.1.20.1 SSB based L1-RSRP accuracy requirements

10.1.20.1.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SSB based L1-RSRP in this clause apply to all SSBs of the serving cell configured for L1-RSRP measurement.

The accuracy requirements in Table 10.1.20.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.1 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.20.1.1-1: SSB based L1-RSRP absolute accuracy in FR2

| Accuracy | | Conditions | | | | |
|------------------|-------------------|--------------------|--------------------------|-----------------------|---------------------|---------------------|
| Normal condition | Extreme condition | SSB $\hat{E}s/lot$ | I_o Note 1 range | | | |
| | | | Minimum I_o | | Maximum I_o | |
| dB | dB | dB | dBm / SCS_{SSB} Note 2 | | dBm/ $BW_{Channel}$ | dBm/ $BW_{Channel}$ |
| | | | $SCS_{SSB} = 120$ kHz | $SCS_{SSB} = 240$ kHz | | |

| | | | | | |
|--|-------|-----|---|-----|-----|
| ±6.5 | ±9.5 | ≥-3 | Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival | N/A | -70 |
| ±8.5 | ±11.5 | ≥-3 | N/A | -70 | -50 |
| NOTE 1: I_0 specified at the Reference point, and assumed to have constant EPRE across the bandwidth. | | | | | |
| NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. | | | | | |
| NOTE 3: In the test cases, the SSB \hat{E}_s/lot and related parameters may need to be adjusted to ensure \hat{E}_s/lot at UE baseband is above the value defined in this table. | | | | | |

10.1.20.1.2 Relative Accuracy

The relative accuracy of SSB based L1-RSRP is defined as the L1-RSRP measured from one SSB compared to the largest measured value of L1-RSRP among all SSBs of the serving cell.

The accuracy requirements in Table 10.1.20.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.1 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.20.1.2-1: SSB based L1-RSRP relative accuracy in FR2

| Accuracy | | Conditions | | | |
|--|-------------------|----------------------------|---|-----------------------------|---------------------|
| Normal condition | Extreme condition | SSB \hat{E}_s/lot | I_0 ^{Note 1} range | | Maximum I_0 |
| | | | Minimum I_0 | | |
| dB | dB | dB | dBm / SCS_{SSB} ^{Note 3} | | dBm/ $BW_{Channel}$ |
| | | | $SCS_{SSB} = 120\text{kHz}$ | $SCS_{SSB} = 240\text{kHz}$ | |
| ±6.5 | ±9.5 | ≥-3 | Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival | | -50 |
| NOTE 1: I_0 specified at the Reference point, and assumed to have constant EPRE across the bandwidth. | | | | | |
| NOTE 2: The parameter SSB \hat{E}_s/lot is the minimum SSB \hat{E}_s/lot of the pair of SSBs to which the requirement applies. | | | | | |
| NOTE 3: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. | | | | | |
| NOTE 4: In the test cases, the SSB \hat{E}_s/lot and related parameters may need to be adjusted to ensure \hat{E}_s/lot at UE baseband is above the value defined in this table. | | | | | |

10.1.20.2 CSI-RS based L1-RSRP accuracy requirements

10.1.20.2.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RS based L1-RSRP in this clause apply to all CSI-RS resources of the serving cell configured for L1-RSRP measurement.

The accuracy requirements in Table 10.1.20.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.

- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.2 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.20.2.1-1.

Table 10.1.20.2.1-1: CSI-RS based L1-RSRP absolute accuracy in FR2

| Accuracy | | Conditions | | | |
|------------------|-------------------|-------------------------------|--|---------------------------------------|---------------------------|
| Normal condition | Extreme condition | CSI-RS \hat{E}_s/lot | Io ^{Note 1} range | | |
| | | | Minimum Io | | Maximum Io |
| dB | dB | dB | dBm / $SCS_{\text{CSI-RS}}$ ^{Note 2} | | dBm/BW _{Channel} |
| | | | $SCS_{\text{CSI-RS}} = 60\text{kHz}$ | $SCS_{\text{CSI-RS}} = 120\text{kHz}$ | |
| ± 6.5 | ± 9.5 | ≥ -3 | Same value as CSI-RS_RP in Table B.2.4.2-2, according to UE Power class, operating band and angle of arrival | | N/A |
| ± 8.5 | ± 11.5 | ≥ -3 | N/A | | -70 |

NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
NOTE 3: In the test cases, the CSI-RS \hat{E}_s/lot and related parameters may need to be adjusted to ensure \hat{E}_s/lot at UE baseband is above the value defined in this table.

10.1.20.2.2 Relative Accuracy

The relative accuracy of CSI-RS based L1-RSRP is defined as the L1-RSRP measured from one CSI-RS compared to the largest measured value of L1-RSRP among all CSI-RS resources of the serving cell.

The accuracy requirements in Table 10.1.20.2.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.2 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.20.2.2-1.

Table 10.1.20.2.2-1: CSI-RS based L1-RSRP relative accuracy in FR2

| Accuracy | | Conditions | | | |
|------------------|-------------------|-------------------------------|--------------------------------------|---------------------------------------|---------------------------|
| Normal condition | Extreme condition | CSI-RS \hat{E}_s/lot | Io ^{Note 1} range | | |
| | | | Minimum Io | | Maximum Io |
| dB | dB | dB | dBm / $SCS_{\text{CSI-RS}}$ | | dBm/BW _{Channel} |
| | | | $SCS_{\text{CSI-RS}} = 60\text{kHz}$ | $SCS_{\text{CSI-RS}} = 120\text{kHz}$ | |

| | | | | |
|--|------|-----|--|-----|
| ±6.5 | ±9.5 | ≥-3 | Same value as CSI-RS RP in Table B.2.4.2-2, according to UE Power class, operating band and angle of arrival | -50 |
| <p>NOTE 1: I_0 is specified at the Reference point, and assumed to have constant EPRE across the bandwidth.</p> <p>NOTE 2: The parameter CSI-RS \hat{E}_s/l_0 is the minimum CSI-RS \hat{E}_s/l_0 of the pair of CSI-RS resources to which the requirement applies.</p> <p>NOTE 3: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.</p> <p>NOTE 4: In the test cases, the CSI-RS \hat{E}_s/l_0 and related parameters may need to be adjusted to ensure \hat{E}_s/l_0 at UE baseband is above the value defined in this table.</p> | | | | |

10.1.21 SFTD accuracy requirements

10.1.21.1 SFTD accuracy requirements for NE-DC

The SFN and frame timing difference (SFTD) is measured between PCell and E-UTRAN PSCell under NE-DC.

The accuracy requirements in Table 10.1.21.1-4 are applicable under the following conditions:

For FR1 PCell SFN and frame timing measurement:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- I_0 range defined in Table 10.1.21.1-1.

Table 10.1.21.1-1: PCell I_0 range conditions in FR1

| Parameter | I_0 ^{Note 1} range | | | |
|---|---|------------------------------------|----------------------|---------------------|
| | NR operating band groups ^{Note 4, 5} | Minimum I_0 ^{Note 2, 3} | | Maximum I_0 |
| | | dBm/ SCS_{SSB} | | |
| | | $SCS_{SSB} = 15$ kHz | $SCS_{SSB} = 30$ kHz | dBm/ $BW_{Channel}$ |
| Conditions | NR_FDD_FR1_A, NR_TDD_FR1_A | -121 | -118 | -50 |
| | NR_FDD_FR1_B | -120.5 | -117.5 | -50 |
| | NR_TDD_FR1_C | -120 | -117 | -50 |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | -119.5 | -116.5 | -50 |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | -119 | -116 | -50 |
| | NR_FDD_FR1_G | -118 | -115 | -50 |
| | NR_FDD_FR1_H | -117.5 | -114.5 | -50 |
| <p>NOTE 1: I_0 is assumed to have constant EPRE across the bandwidth.</p> <p>NOTE 2: The condition level is increased by $\Delta R_{IB,c}$ as defined in clause 7.3B in TS 38.101-3 [20], depending on E-UTRA – NR band combination.</p> <p>NOTE 3: The condition level is increased by MSD as defined in clause 7.3B in TS 38.101-3 [20], if applicable depending on E-UTRA – NR band combination.</p> <p>NOTE 4: NR operating band groups are as defined in clause 3.5.</p> <p>NOTE 5: Only NR bands within EN-DC band combinations as specified in clause 5.5B in TS 38.101-3 [20] are applicable.</p> | | | | |

For FR2 PCell SFN and frame timing measurement:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- I_0 range defined in Table 10.1.21.1-2.

Table 10.1.21.1-2: PCell Io range conditions in FR2

| Parameter | Io ^{Note 1} range | | |
|---|---|---|---------------------------|
| | Minimum Io ^{Note 2, 3} | | Maximum Io |
| | dBm/ SCS _{SSB} | | dBm/BW _{Channel} |
| SCS _{SSB} = 15 kHz | SCS _{SSB} = 30 kHz | | |
| Conditions | Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival | Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival | -50 |
| NOTE 1: Io is assumed to have constant EPRE across the bandwidth and specified at the Reference point. NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. NOTE 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table. | | | |

For E-UTRA PSCell SFN and frame timing measurement:

- Cell specific reference signals are transmitted either from one, two or four antenna ports.
- Conditions defined in TS 36.101 [25] Clause 7.3 for reference sensitivity are fulfilled.
- No changes to the uplink transmission timing are applied during the measurement period.
- RSRP_{dBm} according to Annex B.3.5 in TS 36.101 [25] for a corresponding Band.
- Io range deifined in Table 10.1.21.1-3.

Table 10.1.21.1-3: E-UTRA PSCell Io range conditions

| Parameter | Io ^{Note 1} range | | |
|---|--|-----------------------------|---------------------------|
| | E-UTRA operating band groups ^{Note 3} | Minimum Io | Maximum Io |
| Conditions | | dBm/15kHz ^{Note 2} | dBm/BW _{Channel} |
| | FDD_A, TDD_A | -121 | -50 |
| | FDD_C, TDD_C | -120 | -50 |
| | FDD_D | -119.5 | -50 |
| | FDD_E, TDD_E | -119 | -50 |
| | FDD_F | -118.5 | -50 |
| | FDD_G | -118 | -50 |
| | FDD_H | -117.5 | -50 |
| | FDD_N | -114.5 | -50 |
| NOTE 1: When in dBm/15kHz, the minimum Io condition is expressed as the average Io per RE over all REs in that symbol. Io may be different in different symbols within a subframe. NOTE 2: The condition level is increased by Δ>0, when applicable, as described in clauses B.4.2 and B.4.3 in TS36.133 [15]. NOTE 3: E-UTRA operating band groups are as defined in clause 3.5 in TS 36.133 [15]. | | | |

Table 10.1.21.1-4: SFTD measurement accuracy

| Accuracy | Conditions | |
|--|--------------------------|-----------------|
| | Ês/Iot ^{Note 2} | Frequency range |
| T _S ^{Note 1} | dB | |
| 40*64*Tc | ≥-3 dB | FR1 |
| 40*64*Tc | | FR2 |
| NOTE 1: Tc is the basic timing unit defined in TS 38.211 [6]. NOTE 2: The parameter Ês/Iot is the minimum Ês/Iot of the pair of cells to which the requirement applies. | | |

10.1.21.2 SFTD accuracy requirements for NR-DC

The SFN and frame timing difference (SFTD) is measured between PCell in FR1 and PSCell in FR2 under NR dual connectivity.

The accuracy requirements in Table 10.1.21.2-3 are applicable under the following conditions:

For FR1 PCell SFN and frame timing measurement:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- I_o range defined in Table 10.1.21.2-1.

Table 10.1.21.2-1: PCell I_o range conditions in FR1

| Parameter | I_o ^{Note 1} range | | | |
|------------|--|----------------------|--------|---------------------|
| | NR operating band groups ^{Note 2} | Minimum I_o | | Maximum I_o |
| | | dBm/ SCS_{SSB} | | dBm/ $BW_{Channel}$ |
| | $SCS_{SSB} = 15$ kHz | $SCS_{SSB} = 30$ kHz | | |
| Conditions | NR_FDD_FR1_A, NR_TDD_FR1_A | -121 | -118 | -50 |
| | NR_FDD_FR1_B | -120.5 | -117.5 | -50 |
| | NR_TDD_FR1_C | -120 | -117 | -50 |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | -119.5 | -116.5 | -50 |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | -119 | -116 | -50 |
| | NR_FDD_FR1_G | -118 | -115 | -50 |
| | NR_FDD_FR1_H | -117.5 | -114.5 | -50 |

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.
 NOTE 2: NR operating band groups are as defined in clause 3.5.2.

For FR2 PSCell SFN and frame timing measurement:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- I_o range defined in Table 10.1.21.2-2.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.21.2-2: PSCell I_o range conditions in FR2

| Parameter | I_o ^{Note 1} range | | |
|----------------------|---|---|---------------------|
| | Minimum I_o ^{Note 2, 3} | | Maximum I_o |
| | dBm/ SCS_{SSB} | | dBm/ $BW_{Channel}$ |
| $SCS_{SSB} = 15$ kHz | $SCS_{SSB} = 30$ kHz | | |
| Conditions | Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival | Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival | -50 |

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth and specified at the Reference point.
 NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
 NOTE 3: In the test cases, the SSB \hat{E}_s/I_{ot} and related parameters may need to be adjusted to ensure \hat{E}_s/I_{ot} at UE baseband is above the value defined in this table.

Table 10.1.21.2-3: SFTD measurement accuracy

| Accuracy | Conditions | |
|---|-----------------------------------|---------------------|
| | \hat{E}_s/lot ^{Note 2} | Frequency range |
| T_s ^{Note 1} | dB | |
| $40 \cdot 64 \cdot T_c$ | ≥ -3 dB | Between FR1 and FR2 |
| NOTE 1: T_c is the basic timing unit defined in TS 38.211 [6]. | | |
| NOTE 2: The parameter \hat{E}_s/lot is the minimum \hat{E}_s/lot of the pair of cells to which the requirement applies. | | |

10.1.21.3 Inter frequency SFTD accuracy requirements

The SFN and frame timing difference (SFTD) is measured between PCell and inter-frequency neighbour cell.

The accuracy requirements in Table 10.1.21.3-3 are applicable under the following conditions:

For FR1 PCell, inter frequency neighbour cell SFN and frame timing measurement:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- I_o range defined in Table 10.1.21.3-1.

Table 10.1.21.3-1: PCell, inter frequency neighbour cell I_o range conditions in FR1

| Parameter | I_o ^{Note 1} range | | | |
|------------|--|----------------------|----------------------|---------------------|
| | NR operating band groups ^{Note 2} | Minimum I_o | | Maximum I_o |
| | | dBm/ SCS_{SSB} | | |
| | | $SCS_{SSB} = 15$ kHz | $SCS_{SSB} = 30$ kHz | dBm/ $BW_{Channel}$ |
| Conditions | NR_FDD_FR1_A, NR_TDD_FR1_A | -121 | -118 | -50 |
| | NR_FDD_FR1_B | -120.5 | -117.5 | -50 |
| | NR_TDD_FR1_C | -120 | -117 | -50 |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | -119.5 | -116.5 | -50 |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | -119 | -116 | -50 |
| | NR_FDD_FR1_G | -118 | -115 | -50 |
| | NR_FDD_FR1_H | -117.5 | -114.5 | -50 |

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.
 NOTE 2: NR operating band groups are as defined in clause 3.5.2.

For FR2 PCell, inter frequency neighbour cell SFN and frame timing measurement:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- I_o range defined in Table 10.1.21.3-2.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.21.3-2: PCell, inter frequency neighbour cell Io range conditions in FR2

| Parameter | Io ^{Note 1} range | | |
|---|---|---|---------------------------|
| | Minimum Io ^{Note 2, 3} | | Maximum Io |
| | dBm/ SCS _{SSB} | | dBm/BW _{Channel} |
| SCS _{SSB} = 15 kHz | SCS _{SSB} = 30 kHz | | |
| Conditions | Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival | Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival | -50 |
| NOTE 1: Io is assumed to have constant EPRE across the bandwidth and specified at the Reference point. NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. NOTE 3: In the test cases, the SSB Ês/lot and related parameters may need to be adjusted to ensure Ês/lot at UE baseband is above the value defined in this table. | | | |

Table 10.1.21.3-3: Inter frequency SFTD measurement accuracy

| Accuracy | Conditions | |
|--|--------------------------|-----------------|
| | Ês/lot ^{Note 2} | Frequency range |
| T _s ^{Note 1} | dB | |
| 40*64*T _c | ≥ -3 dB | FR1, FR2 |
| NOTE 1: T _c is the basic timing unit defined in TS 38.211 [6]. NOTE 2: The parameter Ês/lot is the minimum Ês/lot of the pair of cells to which the requirement applies. | | |

10.2 E-UTRAN measurements

10.2.1 Introduction

Accuracy requirements for measurements on E-UTRAN carrier frequencies are specified in clause 10.2 and apply for UE in SA or NR-DC or NE-DC operation mode.

The requirements in clause 10.2 are applicable for a UE:

- in RRC_CONNECTED state
- performing measurements with appropriate measurement gaps according to clause 9.1.2.
- that is synchronised to the cell that is measured.

The reported measurement result after layer 1 filtering shall be an estimate of the average value of the measured quantity over the measurement period. The reference point for the measurement result after layer 1 filtering is referred to as point B in the measurement model described in TS 36.300 [24].

The accuracy requirements of E-UTRA measurements in this clause are valid for the reported measurement result after layer 1 filtering. The accuracy requirements are verified from the measurement report at point D in the measurement model having the layer 3 filtering disabled.

If the UE needs measurement gaps to perform the inter-RAT NR — E-UTRAN FDD and NR — E-UTRAN TDD measurements, the relevant measurement procedure and measurement gap patterns stated in clause 9.1.2 shall apply.

10.2.2 E-UTRAN RSRP measurements

NOTE: This measurement is for handover between NR and E-UTRAN.

The measurement period of E-UTRA RSRP in RRC_CONNECTED state is specified in clause 9.4.2 and 9.4.3.

The accuracy requirements of E-UTRA RSRP measurements in RRC_CONNECTED state and the corresponding side conditions shall be the same as the inter-frequency RSRP Accuracy Requirements in clause 9.1.3 of TS 36.133 [15].

The reporting range and mapping specified for RSRP measurements in clause 9.1.4 of TS 36.133 [15] shall apply.

10.2.3 E-UTRAN RSRQ measurements

NOTE: This measurement is for handover between NR and E-UTRAN.

The measurement period of E-UTRA RSRQ in RRC_CONNECTED state is specified in clause 9.4.2 and 9.4.3.

The accuracy requirements of E-UTRA RSRQ measurements in RRC_CONNECTED state and the corresponding side conditions shall be the same as the inter-frequency RSRQ Accuracy Requirements in clause 9.1.6 of TS 36.133 [15].

The requirements for accuracy of E-UTRA RSRQ measurements in RRC_CONNECTED state and the corresponding side conditions shall be the same as the inter-frequency RSRQ Accuracy Requirements in clause 9.1.6 of TS 36.133 [15].

The reporting range and mapping specified for RSRQ measurements in clause 9.1.7 of TS 36.133 [15] shall apply.

10.2.4 E-UTRAN RSTD measurements

The requirements in this clause are valid for UE supporting this capability.

The measurement period is specified in clauses 9.4.4.1 and 9.4.4.2 for inter-RAT NR — E-UTRAN FDD and inter-RAT NR — E-UTRAN TDD RSTD measurements, respectively.

The accuracy requirements and the corresponding side conditions shall be the same as the inter-frequency measurement accuracy requirements for RSTD measurements in RRC_CONNECTED in clause 9.1.10.2 of TS 36.133 [15].

If the UE needs measurement gaps to perform the inter-RAT NR — E-UTRAN FDD and NR — E-UTRAN TDD RSTD measurements, the relevant measurement procedure and measurement gap patterns stated in clause 9.1.2 shall apply.

The reporting range and mapping for the inter-RAT NR — E-UTRAN FDD and NR — E-UTRAN TDD RSTD measurements is the same as specified for RSTD measurements in TS 36.133 [15, clauses 9.1.10.3 and 9.1.10.4].

10.2.5 E-UTRAN RS-SINR measurements

NOTE: This measurement is for handover between NR and E-UTRAN.

The measurement period of E-UTRA RS-SINR in RRC_CONNECTED state is specified in clause 9.4.2 and 9.4.3.

The accuracy requirements of E-UTRA RS-SINR measurements in RRC_CONNECTED state and the corresponding side conditions shall be the same as the inter-frequency RS-SINR Accuracy Requirements in clause 9.1.17.3 of TS 36.133 [15].

The reporting range and mapping for E-UTRA RS-SINR measurements shall be the same as specified for RS-SINR measurements in clause 9.1.17.1 of TS 36.133 [15].

11 Void

Annex A (normative): Test Cases

A.1 Purpose of annex

A.2 Requirement classification for statistical testing

Requirements in this specification are either expressed as absolute requirements with a single value stating the requirement, or expressed as a success rate. There are no provisions for the statistical variations that will occur when the parameter is tested.

Annex A outlines the tests in more detail and lists the test parameters needed. The test will result in an outcome of a test variable value for the device under test (DUT) inside or outside the test limit. Overall, the probability of a "good" DUT being inside the test limit(s) and the probability of a "bad" DUT being outside the test limit(s) should be as high as possible. For this reason, when selecting the test variable and the test limit(s), the statistical nature of the test is accounted for.

The statistical nature depends on the type of requirement. Some have large statistical variations, while others are not statistical in nature at all. When testing a parameter with a statistical nature, a confidence level is set. This establishes the probability that a DUT passing the test actually meets the requirements and determines how many times a test has to be repeated and what the pass and fail criteria are. Those aspects are not covered by TS 38.133. The details of the tests on how many times to run it and how to establish confidence in the tests are described in TS 38.533 [5]. This Annex establishes the variable to be used in the test and whether it can be viewed as statistical in nature or not.

A.2.1 Types of requirements in TS 38.133

A.2.1.1 Time and delay requirements on UE higher layer actions

A very large part of the RRM requirements are delay requirements:

- In RRC_IDLE state mobility (clause A.4.x, A.5.x, A.6.x and A.7.x) there is cell re-selection delay.
- In RRC_CONNECTED state mobility (clauses A.4.3, A.4.6, A.5.3, A.5.6, A.6.3, A.6.6, A.7.3 and A.7.6) there is handover delay, cell search delay and measurement reporting delay.
- In RRC Connection Control (clauses A.4.3.2, A.5.3.2, A.6.3.2 and A.7.3.2) there is RRC re-establishment delay.

All have in common that the UE is required to perform an action observable in higher layers (e.g. camp on the correct cell) within a certain time after a specific event (e.g. when a new strong pilot or reference signal appears). The delay time is statistical in nature for several reasons, among others that several of the measurements are performed by the UE in a fading radio environment.

The variations make a strict limit unsuitable for a test. Instead there is a condition set for a correct action by the UE, e.g. that the UE shall camp on the correct cell within X seconds. Then the rate of correct events is observed during

repeated tests and a limit is set on the rate of correct events, usually 90% correct events are required. How the limit is applied in the test depends on the confidence required, further detailed are in TS 38.533 [5].

A.2.1.2 Measurements of power levels, relative powers and time

A very large number of requirements are on measurements that the UE performs:

- In RRC_CONNECTED state mobility (clauses A.4.3, A.5.3, A.6.3 and A.7.3) there are measurement reports.
- In Measurement Performance Requirements (clauses A.4.7, A.5.7, A.6.7 and A.7.7) there are requirements for all type of measurements.

The accuracy requirements on measurements are expressed in this specification as a fixed limit (e.g. +/-X dB), but the measurement error will have a distribution that is not easily confined in fixed limits. Assuming a Gaussian distribution of the error, the limits will have to be set at $\pm 3.29\sigma$ if the probability of failing a "good DUT" in a single test is to be kept at 0.1%. It is more reasonable to set the limit tighter and test the DUT by counting the rate of measurements that are within the limits, in a way similar to the requirements on delay.

A.2.1.3 Implementation requirements

A few requirements are strict actions the UE should take or capabilities the UE should have, without any allowance for deviations. These requirements are absolute and should be tested as such. Examples are:

- "Event triggered report rate" in RRC_CONNECTED state mobility (clauses A.4.3, A.4.6, A.5.3, A.5.6, A.6.3, A.6.6, A.7.3 and A.7.6)
- "Correct behaviour at time-out" in RRC connection control (clauses A.4.3.2, A.5.3.2, A.6.3.2 and A.7.3.2)

A.2.1.4 Physical layer timing requirements

There are requirements on Timing (clauses A.4.4, A.5.4, A.6.4 and A.7.4). There are both absolute and relative limits on timing accuracy depending upon the type of requirement. Examples are:

- Initial Transmit Timing (clauses A.4.4.1, A.5.4.1, A.6.4.1 and A.7.4.1) has an absolute limit on timing accuracy.
- Timing Advance (clauses A.4.4.2, A.5.4.2, A.6.4.2 and A.7.4.2) has a relative limit on timing accuracy.

A.3 RRM test configurations

A.3.1 Reference measurement channels

A.3.1.1 PDSCH

A.3.1.1.1 FDD

Table A.3.1.1.1-1: PDSCH Reference Measurement Channels for SCS=15kHz

| Parameter | Unit | Value | | | | | |
|---|---|---------------|--|--|--|--|--|
| Reference channel | | SR.1.1 FDD | | | | | |
| Channel bandwidth | MHz | 10 | | | | | |
| Number of transmitter antennas | | 1 | | | | | |
| Allocated resource blocks for PDSCH ^{Note 1} | | 24 | | | | | |
| Allocated slots per Radio Frame | | 10 | | | | | |
| Radio frame containing SSB | slots | Note 5 | | | | | |
| Radio frame not containing SSB | slots | 10 | | | | | |
| MCS index | | 4 | | | | | |
| Modulation | | QPSK | | | | | |
| Target Coding Rate | | 1/3 | | | | | |
| Number of control symbols | | 2 | | | | | |
| PDSCH mapping type | | Type A | | | | | |
| Information Bit Payload | | | | | | | |
| For slots with RMSI ^{Note 2} | bits | 1608 | | | | | |
| For slots without RMSI | bits | 1864 | | | | | |
| Number of Code Blocks per slot | | 1 | | | | | |
| Binary Channel Bits Per slot | | | | | | | |
| For slots with RMSI ^{Note 2, Note 4} | bits | 5184 | | | | | |
| For slots without RMSI ^{Note 6} | bits | 6048 | | | | | |
| Note 1: | Allocated outside the SMTC duration in time and in resource blocks which do not overlap with the resource blocks allocated for SS/PBCH block. | | | | | | |
| Note 2: | PDSCH is scheduled on the slots with RMSI. | | | | | | |
| Note 3: | If necessary the information bit payload size can be adjusted to facilitate the test implementation. The payload sizes are defined in TS 38.213 [3]. | | | | | | |
| Note 4: | Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditionalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 2. | | | | | | |
| Note 5: | PDSCH is not scheduled in slots containing SSB according to the SSB configuration used in the test. SSB configurations are defined in clause A.3.10. | | | | | | |

A.3.1.1.2 TDD

Table A.3.1.1.2-1: PDSCH Reference Measurement Channels for SCS=15kHz

| Parameter | Unit | Value | | | | | |
|---|---|---------------|--|--|--|--|--|
| Reference channel | | SR.1.1 TDD | | | | | |
| Channel bandwidth | MHz | 10 | | | | | |
| Number of transmitter antennas | | 1 | | | | | |
| Allocated resource blocks for PDSCH ^{Note 1} | | 24 | | | | | |
| Allocated slots per Radio Frame | | | | | | | |
| Radio frame containing SSB | slots | Note 5 | | | | | |
| Radio frame not containing SSB | slots | 4 | | | | | |
| MCS table | | 64QAM | | | | | |
| MCS index | | 4 | | | | | |
| Modulation | | QPSK | | | | | |
| Target Coding Rate | | 1/3 | | | | | |
| Number of control symbols | | 2 | | | | | |
| PDSCH mapping type | | Type A | | | | | |
| Information Bit Payload | | | | | | | |
| For slots with RMSI ^{Note 2} | bits | 1608 | | | | | |
| For slots without RMSI | bits | 1864 | | | | | |
| Number of Code Blocks per slot | | 1 | | | | | |
| Binary Channel Bits Per slot | | | | | | | |
| For slots with RMSI ^{Note 2, Note 4} | bits | 5184 | | | | | |
| For slots without RMSI ^{Note 6} | bits | 6048 | | | | | |
| Note 1: | Allocated outside the SMTC duration in time and in resource blocks which do not overlap with the resource blocks allocated for SS/PBCH block. | | | | | | |
| Note 2: | PDSCH is scheduled on the slots with RMSI. | | | | | | |
| Note 3: | If necessary the information bit payload size can be adjusted to facilitate the test implementation. The payload sizes are defined in TS 38.213 [3]. | | | | | | |
| Note 4: | Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditionalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 2. | | | | | | |
| Note 5: | PDSCH is not scheduled in slots containing SSB according to the SSB configuration used in the test. SSB configurations are defined in clause A.3.10. | | | | | | |
| Note 6: | Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditionalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 1. | | | | | | |

Table A.3.1.1.1-2: PDSCH Reference Measurement Channels for SCS=30kHz

| Parameter | Unit | Value | | | | | | |
|---|-------|---------------|--|--|--|--|--|--|
| Reference channel | | SR.2.1 TDD | | | | | | |
| Channel bandwidth | MHz | 40 | | | | | | |
| Number of transmitter antennas | | 1 | | | | | | |
| Allocated resource blocks for PDSCH ^{Note 1} | | 24 | | | | | | |
| Allocated slots per Radio Frame | | | | | | | | |
| Radio frame containing SSB | slots | Note 5 | | | | | | |
| Radio frame not containing SSB | slots | 10 | | | | | | |
| MCS table | | 64QAM | | | | | | |
| MCS index | | 4 | | | | | | |
| Modulation | | QPSK | | | | | | |
| Target Coding Rate | | 1/3 | | | | | | |
| Number of control symbols | | 2 | | | | | | |
| PDSCH mapping type | | Type A | | | | | | |
| Information Bit Payload | | | | | | | | |
| For slots with RMSI ^{Note 2} | bits | 1608 | | | | | | |
| For slots without RMSI | bits | 1864 | | | | | | |
| Number of Code Blocks per slot | | 1 | | | | | | |
| Binary Channel Bits Per slot | | | | | | | | |
| For slots with RMSI ^{Note 2, Note 4} | bits | 6048 | | | | | | |
| <p>Note 1: Allocated outside the SMTTC duration in time and in resource blocks which do not overlap with the resource blocks allocated for SS/PBCH block.</p> <p>Note 2: PDSCH is scheduled on the slots with RMSI.</p> <p>Note 3: If necessary the information bit payload size can be adjusted to facilitate the test implementation. The payload sizes are defined in TS 38.213 [3].</p> <p>Note 4: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditionalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 2.</p> <p>Note 5: PDSCH is not scheduled in slots containing SSB according to the SSB configuration used in the test. SSB configurations are defined in clause A.3.10.</p> <p>Note 6: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditionalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 1.</p> | | | | | | | | |

Table A.3.1.1.1-3: PDSCH Reference Measurement Channels for SCS=120kHz

| Parameter | Unit | Value | | | | | |
|--|-------|---------------|--|--|--|--|--|
| Reference channel | | SR.3.1 TDD | | | | | |
| Channel bandwidth | MHz | 100 | | | | | |
| Number of transmitter antennas | | 1 | | | | | |
| Allocated resource blocks for PDSCH ^{Note 1} | | 24 | | | | | |
| Allocated slots per Radio Frame | | | | | | | |
| Radio frame containing SSB | slots | Note 5 | | | | | |
| Radio frame not containing SSB | slots | 48 | | | | | |
| MCS table | | 64QAM | | | | | |
| MCS index | | 4 | | | | | |
| Modulation | | QPSK | | | | | |
| Target Coding Rate | | 1/3 | | | | | |
| Number of control symbols | | 2 | | | | | |
| PDSCH mapping type | | Type A | | | | | |
| Information Bit Payload | | | | | | | |
| For slots with RMSI ^{Note 2} | bits | 1608 | | | | | |
| For slots without RMSI | bits | 1864 | | | | | |
| Number of Code Blocks per slot | | 1 | | | | | |
| Binary Channel Bits Per slot | | | | | | | |
| For slots with RMSI ^{Note 2, Note 4} | bits | 5184 | | | | | |
| For slots without RMSI ^{Note 6} | bits | 6048 | | | | | |
| <p>Note 1: Allocated outside the SMTTC duration in time and in resource blocks which do not overlap with the resource blocks allocated for SS/PBCH block</p> <p>Note 2: PDSCH is scheduled on the slots with RMSI.</p> <p>Note 3: If necessary the information bit payload size can be adjusted to facilitate the test implementation. The payload sizes are defined in TS 38.213 [3].</p> <p>Note 4: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditionalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 2.</p> <p>Note 5: PDSCH is not scheduled in slots containing SSB according to the SSB configuration used in the test. SSB configurations are defined in clause A.3.10.</p> <p>Note 6: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditionalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 1.</p> | | | | | | | |

A.3.1.2 CORESET for RMSI scheduling

A.3.1.2.1 FDD

Table A.3.1.2.1-1: RMSI CORESET Reference Channel for FDD with SCS=15KHz

| Parameter | Unit | Value | | | | | |
|---|---------|---------------|--|--|--|--|--|
| Reference channel | | CR.1.1 FDD | | | | | |
| Channel bandwidth | MHz | 10 | | | | | |
| Subcarrier spacing for RMSI CORESET | kHz | 15 | | | | | |
| Allocated resource blocks for RMSI CORESET ^{Note 7} | | 24 | | | | | |
| Subcarrier spacing for SSB | kHz | 15 | | | | | |
| SSB and RMSI CORESET multiplexing configuration ^{Note 7} | | Pattern 1 | | | | | |
| Offset between SSB and RMSI CORESET ^{Note 3, 7} | RB | 0 (Note8) | | | | | |
| Configuration of PDCCH monitoring occasions for RMSI CORESET ^{Note 4} | | Index 4 | | | | | |
| Number of transmitter antennas | | 1 | | | | | |
| Duration of RMSI CORESET ^{Note 7} | symbols | 2 | | | | | |
| DCI Format ^{Note 1} | | Note 2 | | | | | |
| Aggregation level | CCE | 8 | | | | | |
| DMRS precoder granularity | | 6 | | | | | |
| REG bundle size | | 6 | | | | | |
| Mapping from REG to CCE | | Distributed | | | | | |
| Cell ID | | Note 5 | | | | | |
| Payload (without CRC) | bits | Note 6 | | | | | |
| <p>Note 1: DCI formats are defined in TS 38.212.</p> <p>Note 2: DCI format shall depend upon the test configuration.</p> <p>Note 3: The offset is defined with respect to the subcarrier spacing of the CORESET from the smallest RB index of RMSI CORESET to the smallest RB index of the common RB overlapping with the first RB of the SS/PBCH block.</p> <p>Note 4: The configuration of PDCCH monitoring occasions for RMSI CORESET is defined in Table 13-11 in TS 38.213 [3].</p> <p>Note 5: Cell ID shall depend upon the test configuration.</p> <p>Note 6: Payload size shall depend upon the test configuration.</p> <p>Note 7: The configuration of set of resource blocks and slot symbols of control resource set for Type0-PDCCH search space corresponds to index 0 in Table 13-1 in TS 38.213 [3]</p> <p>Note 8: Other values can be used to align with GSCN [13] as long as SSB does not overlap the RMC.</p> | | | | | | | |

A.3.1.2.2 TDD

Table A.3.1.2.2-1: RMSI CORESET Reference Channel for TDD with SCS=15KHz

| Parameter | Unit | Value | | | | | |
|--|---------|---------------|--|--|--|--|--|
| Reference channel | | CR.1.1 TDD | | | | | |
| Channel bandwidth | MHz | 10 | | | | | |
| Subcarrier spacing | kHz | 15 | | | | | |
| Allocated resource blocks for RMSI CORESET ^{Note 7} | | 24 | | | | | |
| SSB and RMSI CORESET multiplexing configuration ^{Note 7} | | Pattern 1 | | | | | |
| Offset between SSB and RMSI CORESET ^{Note 3, 7} | RB | 0 (Note 8) | | | | | |
| Configuration of PDCCH monitoring occasions for RMSI CORESET ^{Note 4} | | Index 4 | | | | | |
| Number of transmitter antennas | | 1 | | | | | |
| Duration of RMSI CORESET ^{Note 7} | symbols | 2 | | | | | |
| DCI Format ^{Note 1} | | Note 2 | | | | | |
| Aggregation level | CCE | 8 | | | | | |
| DMRS precoder granularity | | 6 | | | | | |
| REG bundle size | | 6 | | | | | |
| Mapping from REG to CCE | | Distributed | | | | | |
| Cell ID | | Note 5 | | | | | |
| Payload (without CRC) | bits | Note 6 | | | | | |
| <p>Note 1: DCI formats are defined in TS 38.212.</p> <p>Note 2: DCI format shall depend upon the test configuration.</p> <p>Note 3: The offset is defined with respect to the subcarrier spacing of the CORESET from the smallest RB index of RMSI CORESET to the smallest RB index of the common RB overlapping with the first RB of the SS/PBCH block.</p> <p>Note 4: The configuration of PDCCH monitoring occasions for RMSI CORESET is defined in Table 13-11 in TS 38.213 [3].</p> <p>Note 5: Cell ID shall depend upon the test configuration.</p> <p>Note 6: Payload size shall depend upon the test configuration.</p> <p>Note 7: The configuration of set of resource blocks and slot symbols of control resource set for Type0-PDCCH search space corresponds to index 0 in Table 13-1 in TS 38.213 [3].</p> <p>Note 8: Other values can be used to align with GSCN [13] as long as SSB does not overlap the RMC.</p> | | | | | | | |

Table A.3.1.2.2-2: RMSI CORESET Reference Channel for TDD with SCS=30KHz

| Parameter | Unit | Value | | | | | |
|--|---------|---------------|--|--|--|--|--|
| Reference channel | | CR.2.1 TDD | | | | | |
| Channel bandwidth | MHz | 40 | | | | | |
| Subcarrier spacing | kHz | 30 | | | | | |
| Allocated resource blocks for RMSI CORESET ^{Note 7} | | 24 | | | | | |
| SSB and RMSI CORESET multiplexing configuration ^{Note 7} | | Pattern 1 | | | | | |
| Offset between SSB and RMSI CORESET ^{Note 3, 7} | RB | 0 (Note 8) | | | | | |
| Configuration of PDCCH monitoring occasions for RMSI CORESET ^{Note 4} | | Index 4 | | | | | |
| Number of transmitter antennas | | 1 | | | | | |
| Duration of RMSI CORESET ^{Note 7} | symbols | 2 | | | | | |
| DCI Format ^{Note 1} | | Note 2 | | | | | |
| Aggregation level | CCE | 8 | | | | | |
| DMRS precoder granularity | | 6 | | | | | |
| REG bundle size | | 6 | | | | | |
| Mapping from REG to CCE | | Distributed | | | | | |
| Cell ID | | Note 5 | | | | | |
| Payload (without CRC) | bits | Note 6 | | | | | |
| <p>Note 1: DCI formats are defined in TS 38.212.</p> <p>Note 2: DCI format shall depend upon the test configuration.</p> <p>Note 3: The offset is defined with respect to the subcarrier spacing of the CORESET from the smallest RB index of RMSI CORESET to the smallest RB index of the common RB overlapping with the first RB of the SS/PBCH block.</p> <p>Note 4: The configuration of PDCCH monitoring occasions for RMSI CORESET is defined in Table 13-11 in TS 38.213 [3].</p> <p>Note 5: Cell ID shall depend upon the test configuration.</p> <p>Note 6: Payload size shall depend upon the test configuration.</p> <p>Note 7: The configuration of set of resource blocks and slot symbols of control resource set for Type0-PDCCH search space corresponds to index 0 in Table 13-6 in TS 38.213 [3].</p> <p>Note 8: Other values can be used to align with GSCN [13] as long as SSB does not overlap the RMC.</p> | | | | | | | |

Table A.3.1.2.2-3: RMSI CORESET Reference Channel for TDD with SCS=120KHz

| Parameter | Unit | Value | | | | | |
|--|---------|---------------|--|--|--|--|--|
| Reference channel | | CR.3.1 TDD | | | | | |
| Channel bandwidth | MHz | 100 | | | | | |
| Subcarrier spacing | kHz | 120 | | | | | |
| Allocated resource blocks for RMSI CORESET ^{Note 7} | | 24 | | | | | |
| SSB and RMSI CORESET multiplexing configuration ^{Note 7} | | Pattern 1 | | | | | |
| Offset between SSB and RMSI CORESET ^{Note 3, 7} | RB | 0 (Note 8) | | | | | |
| Configuration of PDCCH monitoring occasions for RMSI CORESET ^{Note 4} | | Index 4 | | | | | |
| Number of transmitter antennas | | 1 | | | | | |
| Duration of RMSI CORESET ^{Note 7} | symbols | 2 | | | | | |
| DCI Format ^{Note 1} | | Note 2 | | | | | |
| Aggregation level | CCE | 8 | | | | | |
| DMRS precoder granularity | | 6 | | | | | |
| REG bundle size | | 6 | | | | | |
| Mapping from REG to CCE | | Distributed | | | | | |
| Cell ID | | Note 5 | | | | | |
| Payload (without CRC) | bits | Note 6 | | | | | |
| <p>Note 1: DCI formats are defined in TS 38.212.</p> <p>Note 2: DCI format shall depend upon the test configuration.</p> <p>Note 3: The offset is defined with respect to the subcarrier spacing of the CORESET from the smallest RB index of RMSI CORESET to the smallest RB index of the common RB overlapping with the first RB of the SS/PBCH block.</p> <p>Note 4: The configuration of PDCCH monitoring occasions for RMSI CORESET is defined in Table 13-12 in TS 38.213 [3].</p> <p>Note 5: Cell ID shall depend upon the test configuration.</p> <p>Note 6: Payload size shall depend upon the test configuration.</p> <p>Note 7: The configuration of set of resource blocks and slot symbols of control resource set for Type0-PDCCH search space corresponds to index 0 in Table 13-8 in TS 38.213 [3].</p> <p>Note 8: Other values can be used to align with GSCN [13] as long as SSB does not overlap the RMC.</p> | | | | | | | |

A.3.1.3 CORESET for RMC scheduling

A.3.1.3.1 FDD

Table A.3.1.3.1-1: Control Channel RMC for FDD with SCS=15KHz

| Parameter | Unit | Value | | | | | | |
|---|---------|----------------------------------|--|--|--|--|--|--|
| Reference channel | | CCR.1.1 FDD | | | | | | |
| Channel bandwidth | MHz | 10 | | | | | | |
| Subcarrier spacing | kHz | 15 | | | | | | |
| Allocated resource blocks for CORESET ^{Note 3} | | 24 | | | | | | |
| Number of transmitter antennas | | 1 | | | | | | |
| Duration of CORESET | symbols | 2 | | | | | | |
| REG bundle size | | 6 | | | | | | |
| DMRS precoder granularity | | Same as REG bundle size | | | | | | |
| CCE to REG mapping | | Interleaved | | | | | | |
| Interleave n_shift | | 0 | | | | | | |
| Interleave size | | 2 | | | | | | |
| Beamforming Pre-Coder | | N/A | | | | | | |
| Aggregation level | CCE | 8 | | | | | | |
| DCI formats | | Note 1 | | | | | | |
| Payload size (without CRC) | bits | Note 2 | | | | | | |
| Note 1: DCI format shall depend upon the test configuration. Note 2: Payload size shall depend upon the test configuration Note 3: Allocated in the same resource blocks where the associated RMC is scheduled. | | | | | | | | |

A.3.1.3.2 TDD

Table A.3.1.3.2-1: Control Channel RMC for TDD with SCS=15KHz

| Parameter | Unit | Value | | | | | | |
|---|---------|----------------------------------|--|--|--|--|--|--|
| Reference channel | | CCR.1.1 TDD | | | | | | |
| Channel bandwidth | MHz | 10 | | | | | | |
| Subcarrier spacing | kHz | 15 | | | | | | |
| Allocated resource blocks for CORESET ^{Note 3} | | 24 | | | | | | |
| Number of transmitter antennas | | 1 | | | | | | |
| Duration of CORESET | symbols | 2 | | | | | | |
| REG bundle size | | 6 | | | | | | |
| DMRS precoder granularity | | Same as REG bundle size | | | | | | |
| CCE to REG mapping | | Interleaved | | | | | | |
| Interleave n_shift | | 0 | | | | | | |
| Interleave size | | 2 | | | | | | |
| Beamforming Pre-Coder | | N/A | | | | | | |
| Aggregation level | CCE | 8 | | | | | | |
| DCI formats | | Note 1 | | | | | | |
| Payload size (without CRC) | bits | Note 2 | | | | | | |
| Note 1: DCI format shall depend upon the test configuration. Note 2: Payload size shall depend upon the test configuration Note 3: Allocated in the same resource blocks where the associated RMC is scheduled. | | | | | | | | |

Table A.3.1.3.2-2: Control Channel RMC for TDD with SCS=30KHz

| Parameter | Unit | Value | | | | | |
|--|---------|----------------------------------|--|--|--|--|--|
| Reference channel | | CCR.2.1 TDD | | | | | |
| Channel bandwidth | MHz | 40 | | | | | |
| Subcarrier spacing | kHz | 30 | | | | | |
| Allocated resource blocks for CORESET ^{Note 3} | | 24 | | | | | |
| Number of transmitter antennas | | 1 | | | | | |
| Duration of CORESET | symbols | 2 | | | | | |
| REG bundle size | | 6 | | | | | |
| DMRS precoder granularity | | Same as REG bundle size | | | | | |
| CCE to REG mapping | | Interleaved | | | | | |
| Interleave n_shift | | 0 | | | | | |
| Interleave size | | 2 | | | | | |
| Beamforming Pre-Coder | | N/A | | | | | |
| Aggregation level | CCE | 8 | | | | | |
| DCI formats | | Note 1 | | | | | |
| Payload size (without CRC) | bits | Note 2 | | | | | |
| Note 1: DCI format shall depend upon the test configuration. Note 2: Payload size shall depend upon the test configuration. Note 3: Allocated in the same resource blocks where the associated RMC is scheduled. | | | | | | | |

Table A.3.1.3.2-3: Control Channel RMC for TDD with SCS=120KHz

| Parameter | Unit | Value | | | | | | |
|--|------|----------------------------------|----------------------------------|----------------------------------|--|--|--|--|
| Reference channel | | CCR.3.1 TDD | CCR.3.2 TDD | CCR.3.3 TDD | | | | |
| Channel bandwidth | MHz | 100 | 100 | 100 | | | | |
| Subcarrier spacing | kHz | 120 | 120 | 120 | | | | |
| Allocated resource blocks for CORESET <small>Note 3</small> | | 24 | 24 | 24 | | | | |
| Number of transmitter antennas | | 1 | 1 | 1 | | | | |
| monitoringSlotPeriodicityAndOffset | | sl160 0 | sl160 0 | sl160 80 | | | | |
| monitoringSymbolsWithinSlot | | 1100000 0000000 | 0011000 0000000 | 1100000 0000000 | | | | |
| Duration of CORESET | slot | 1 | 1 | 1 | | | | |
| REG bundle size | | 6 | 6 | 6 | | | | |
| DMRS precoder granularity | | Same as REG bundle size | Same as REG bundle size | Same as REG bundle size | | | | |
| CCE to REG mapping | | Interleaved | Interleaved | Interleaved | | | | |
| Interleave n_shift | | 0 | 0 | 0 | | | | |
| Interleave size | | 2 | 2 | 2 | | | | |
| Beamforming Pre-Coder | | N/A | N/A | N/A | | | | |
| Aggregation level | CCE | 8 | 8 | 8 | | | | |
| DCI formats | | Note 1 | Note 1 | Note 1 | | | | |
| Payload size (without CRC) | bits | Note 2 | Note 2 | Note 2 | | | | |
| Note 1: DCI format shall depend upon the test configuration. Note 2: Payload size shall depend upon the test configuration. Note 3: Allocated in the same resource blocks where the associated PDSCH RMC is scheduled. | | | | | | | | |

A.3.1.4 TDD UL/DL configuration

Table A.3.1.4-1: TDD UL/DL configuration for SCS=15kHz

| Parameter | Unit | Value | |
|--|------|----------------------------|--|
| Reference channel | | TDDConf.1.1 | |
| <i>referenceSubcarrierSpacing</i> | kHz | 15 | |
| TDD UL/DL pattern 1 ^{Note 2} | | 'DSUU' S='10DL:2GP:2UL' | |
| <i>dl-UL-TransmissionPeriodicity</i> | ms | 4 | |
| <i>nrofDownlinkSlots</i> | | 1 | |
| <i>nrofDownlinkSymbols</i> | | 10 | |
| <i>nrofUplinkSlot</i> | | 2 | |
| <i>nrofUplinkSymbols</i> | | 2 | |
| TDD UL/DL pattern 2 ^{Note 2} | | 'D' | |
| <i>dl-UL-TransmissionPeriodicity</i> | ms | 1 | |
| <i>nrofDownlinkSlots</i> | | 1 | |
| <i>nrofDownlinkSymbols</i> | | 0 | |
| <i>nrofUplinkSlot</i> | | 0 | |
| <i>nrofUplinkSymbols</i> | | 0 | |
| Note 1: As specified in TS 38.213 [3] and TS 38.331 [2]. | | | |
| Note 2: For information | | | |

Table A.3.1.4-2: TDD UL/DL configuration for SCS=30kHz

| Parameter | Unit | Value | |
|--|------|-----------------------------|--|
| Reference channel | | TDDConf.2.1 | |
| <i>referenceSubcarrierSpacing</i> | kHz | 30 | |
| TDD UL/DL pattern 1 ^{Note 2} | | '3D1S4U' S='6DL:4GP:4UL' | |
| <i>dl-UL-TransmissionPeriodicity</i> | ms | 4 | |
| <i>nrofDownlinkSlots</i> | | 3 | |
| <i>nrofDownlinkSymbols</i> | | 6 | |
| <i>nrofUplinkSlot</i> | | 4 | |
| <i>nrofUplinkSymbols</i> | | 4 | |
| TDD UL/DL pattern 2 ^{Note 2} | | 'DD' | |
| <i>dl-UL-TransmissionPeriodicity</i> | ms | 1 | |
| <i>nrofDownlinkSlots</i> | | 2 | |
| <i>nrofDownlinkSymbols</i> | | 0 | |
| <i>nrofUplinkSlot</i> | | 0 | |
| <i>nrofUplinkSymbols</i> | | 0 | |
| Note 1: As specified in TS 38.213 [3] and TS 38.331 [2]. | | | |
| Note 2: For information | | | |

Table A.3.1.4-3: TDD UL/DL configuration for SCS=120kHz

| Parameter | Unit | Value | |
|---------------------------------------|--|-----------------------------|--|
| Reference channel | | TDDConf.3.1 | |
| <i>referenceSubcarrierSpacing</i> | kHz | 120 | |
| TDD UL/DL pattern 1 ^{Note 2} | | 'DDDSU' S='10DL:2GP:2UL' | |
| <i>dl-UL-TransmissionPeriodicity</i> | ms | 0.625 | |
| <i>nrofDownlinkSlots</i> | | 3 | |
| <i>nrofDownlinkSymbols</i> | | 10 | |
| <i>nrofUplinkSlot</i> | | 1 | |
| <i>nrofUplinkSymbols</i> | | 2 | |
| TDD UL/DL pattern 2 ^{Note 2} | | Not configured | |
| <i>dl-UL-TransmissionPeriodicity</i> | ms | Not configured | |
| <i>nrofDownlinkSlots</i> | | Not configured | |
| <i>nrofDownlinkSymbols</i> | | Not configured | |
| <i>nrofUplinkSlot</i> | | Not configured | |
| <i>nrofUplinkSymbols</i> | | Not configured | |
| Note 1: | As specified in TS 38.213 [3] and TS 38.331 [2]. | | |
| Note 2: | For information | | |

A.3.2 OFDMA channel noise generator (OCNG)

A.3.2.1 Generic OFDMA Channel Noise Generator (OCNG)

The OCNG pattern is used in a test for modelling allocations of unused resources in the channel bandwidth to virtual UEs (which are not under test). The OCNG pattern comprises PDCCH and PDSCH transmissions to the virtual UEs.

A.3.2.1.1 OCNG pattern 1: Generic OCNG pattern for all unused REs

Table A.3.2.1.1-1: OP.1: Generic OCNG pattern for all unused REs

| OCNG Parameters | Control Region | Data Region |
|-----------------------------|--|--|
| Resource allocation | Unused REs (Note 1) | Unused REs (Note 2) |
| Channel | PDCCH | PDSCH |
| Contents | Virtual UE IDs | Uncorrelated pseudo random QPSK modulated data |
| Antenna transmission scheme | Same as used in PDCCH RMC | Same as used in PDSCH RMC |
| Subcarrier spacing | Same as used in PDCCH RMC | Same as used in PDSCH RMC |
| Aggregation level | Same as used in PDCCH RMC | N/A |
| Code rate | Same as used in PDCCH RMC | Same as used in PDSCH RMC |
| Transmit Power | Same as used in PDCCH RMC | Same as used in PDSCH RMC |
| CP length | Same as used in PDCCH RMC | Same as used in PDSCH RMC |
| Note 1: | REs not used in the active CORESETs where PDCCH is scheduled for the UE under test. | |
| Note 2: | REs not allocated to any physical channels, CORESET, SSB or any other reference signal within the channel bandwidth of the cell. | |

A.3.2.1.2 OCNG pattern 2: Generic OCNG pattern for all unused REs for 2AoA setup

Table A.3.2.1.2-2: OP.2: Generic OCNG pattern for all unused REs for 2AoA setup

| OCNG Parameters | Control Region | Data Region |
|-----------------------------|--|--|
| Probe | Transmitting the serving beam | |
| Resource allocation | Unused REs (Note 1) in the symbols where SSB/CSI-RS are not transmitted from both the serving beam probe and non-serving beam probe. | Unused REs (Note 2) in the symbols where SSB/CSI-RS are not transmitted from both the serving beam probe and non-serving beam probe. |
| Channel | PDCCH | PDSCH |
| Contents | Virtual UE IDs | Uncorrelated pseudo random QPSK modulated data |
| Antenna transmission scheme | Same as used in PDCCH RMC | Same as used in PDSCH RMC |
| Subcarrier spacing | Same as used in PDCCH RMC | Same as used in PDSCH RMC |
| Aggregation level | Same as used in PDCCH RMC | N/A |
| Code rate | Same as used in PDCCH RMC | Same as used in PDSCH RMC |
| Transmit Power | Same as used in PDCCH RMC | Same as used in PDSCH RMC |
| CP length | Same as used in PDCCH RMC | Same as used in PDSCH RMC |
| Note 1: | REs not used in the active CORESETs where PDCCH is scheduled for the UE under test. | |
| Note 2: | REs not allocated to any physical channels, CORESET, SSB or any other reference signal within the channel bandwidth of the cell. | |
| Note 3: | No OCNG is transmitted from the probe transmitting non-serving beam. | |

A.3.2.1.3 OCNG pattern 3: Generic OCNG pattern for unused REs in the same bandwidth as PDSCH RMC

Table A.3.2.1.3-1: OP.3: Generic OCNG pattern for unused REs in the same BW as RMC

| OCNG Parameters | Control Region | Data Region |
|-----------------------------|---|--|
| Resource allocation | Unused REs (Note 1) | Unused REs (Note 2) |
| Channel | PDCCH | PDSCH |
| Contents | Virtual UE IDs | Uncorrelated pseudo random QPSK modulated data |
| Antenna transmission scheme | Same as used in PDCCH RMC | Same as used in PDSCH RMC |
| Subcarrier spacing | Same as used in PDCCH RMC | Same as used in PDSCH RMC |
| Aggregation level | Same as used in PDCCH RMC | N/A |
| Code rate | Same as used in PDCCH RMC | Same as used in PDSCH RMC |
| Transmit Power | Same as used in PDCCH RMC | Same as used in PDSCH RMC |
| CP length | Same as used in PDCCH RMC | Same as used in PDSCH RMC |
| Note 1: | REs not used in the active CORESETs where PDCCH is scheduled for the UE under test. REs for OCNG shall not be allocated outside the allocated bandwidth of the PDSCH RMC of the serving cell. | |
| Note 2: | REs not allocated to any physical channels, CORESET, SSB or any other reference signal within the allocated bandwidth of the PDSCH RMC of the serving cell. REs for OCNG shall not be allocated outside the allocated bandwidth of the PDSCH RMC of the serving cell. | |

A.3.2.1.4 OCNG pattern 4: Generic OCNG pattern for all unused REs outside SSB slot(s)

Table A.3.2.1.4-1: OP.4: Generic OCNG pattern for all unused REs outside SSB slot(s)

| OCNG Parameters | Control Region | Data Region |
|-----------------------------|--|--|
| Resource allocation | Unused REs (Note 1) | Unused REs (Note 2) |
| Channel | PDCCH | PDSCH |
| Contents | Virtual UE IDs | Uncorrelated pseudo random QPSK modulated data |
| Antenna transmission scheme | Same as used in PDCCH RMC | Same as used in PDSCH RMC |
| Subcarrier spacing | Same as used in PDCCH RMC | Same as used in PDSCH RMC |
| Aggregation level | Same as used in PDCCH RMC | N/A |
| Code rate | Same as used in PDCCH RMC | Same as used in PDSCH RMC |
| Transmit Power | Same as used in PDCCH RMC | Same as used in PDSCH RMC |
| CP length | Same as used in PDCCH RMC | Same as used in PDSCH RMC |
| Note 1: | REs not used in the active CORESETs where PDCCH is scheduled for the UE under test. REs for OCNG shall not be allocated in the slot(s) containing SSB of the respective cell. | |
| Note 2: | REs not allocated to any physical channels, CORESET, SSB or any other reference signal within the channel bandwidth of the cell. REs for OCNG shall not be allocated in the slot(s) containing SSB of the respective cell. | |

A.3.2.2 Void

A.3.3 Reference DRX configurations

A.3.3.1 DRX Configuration 1: DRX cycle = 40 ms and TAT = 500 ms

Table A.3.3.1-1: DRX.1: DRX cycle = 40 ms and time alignment timer (TAT) = 500 ms

| Field | Value |
|---------------------------|--|
| drx-onDurationTimer | 1 ms |
| drx-InactivityTimer | 1 ms |
| drx-RetransmissionTimerDL | 1 slot |
| drx-RetransmissionTimerUL | 1 slot |
| drx-LongCycleStartOffset | 40 ms |
| shortDRX | disable |
| TimeAlignmentTimer | 500 ms |
| Note: | This DRX configuration is applicable for NR serving cell. The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [2] |

A.3.3.2 DRX Configuration 2: DRX cycle = 640 ms and TAT = 500 ms

Table A.3.3.2-1: DRX.2: DRX cycle = 640 ms and time alignment timer (TAT) = 500 ms

| Field | Value |
|---------------------------|--|
| drx-onDurationTimer | 1 ms |
| drx-InactivityTimer | 1 ms |
| drx-RetransmissionTimerDL | 1 slot |
| drx-RetransmissionTimerUL | 1 slot |
| drx-LongCycleStartOffset | 640 ms |
| shortDRX | disable |
| TimeAlignmentTimer | 500 ms |
| Note: | This DRX configuration is applicable for NR serving cell. The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [2] |

A.3.3.3 DRX Configuration 3: DRX cycle = 40 ms and TAT = Infinity

Table A.3.3.3-1: DRX.3: DRX cycle = 40 ms and time alignment timer (TAT) = Infinity

| Field | Value |
|---------------------------|--|
| drx-onDurationTimer | 6 ms |
| drx-InactivityTimer | 1 ms |
| drx-RetransmissionTimerDL | 1 slot |
| drx-RetransmissionTimerUL | 1 slot |
| drx-LongCycleStartOffset | 40 ms |
| shortDRX | disable |
| TimeAlignmentTimer | Infinity |
| Note: | This DRX configuration is applicable for NR serving cell. The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [2] |

A.3.3.4 DRX Configuration 4: DRX cycle = 160 ms and TAT = Infinity

Table A.3.3.4-1: DRX.4: DRX cycle = 160 ms and time alignment timer (TAT) = Infinity

| Field | Value |
|--------------------------|---|
| drx-onDurationTimer | psf2 |
| drx-InactivityTimer | psf2 |
| drx-RetransmissionTimer | Psf16 |
| longDRX-CycleStartOffset | sf160, 0 |
| shortDRX | disable |
| TimeAlignmentTimer | Infinity |
| Note: | This DRX configuration is applicable for E-UTRA serving cell. For further information see clause 6.3.2 in TS 36.331 [16]. |

A.3.3.5 DRX Configuration 5: DRX cycle = 320 ms and TAT = Infinity

Table A.3.3.5-1: DRX.5: DRX cycle = 320 ms and time alignment timer (TAT) = Infinity

| Field | Value |
|--------------------------|---|
| drx-onDurationTimer | psf6 |
| drx-InactivityTimer | psf1920 |
| drx-RetransmissionTimer | psf16 |
| longDRX-CycleStartOffset | sf320, 0 |
| shortDRX | disable |
| TimeAlignmentTimer | Infinity |
| Note: | This DRX configuration is applicable for E-UTRA serving cell. For further information see clause 6.3.2 in TS 36.331 [16]. |

A.3.3.6 DRX Configuration 6: DRX cycle = 320 ms and TAT = 500 ms

Table A.3.3.6-1: DRX.6: DRX cycle = 320 ms and time alignment timer (TAT) = 500 ms

| Field | Value |
|---------------------------|--|
| drx-onDurationTimer | 1 ms |
| drx-InactivityTimer | 1 ms |
| drx-RetransmissionTimerDL | 1 slot |
| drx-RetransmissionTimerUL | 1 slot |
| drx-LongCycleStartOffset | 320 ms |
| shortDRX | disable |
| TimeAlignmentTimer | 500 ms |
| Note: | This DRX configuration is applicable for NR serving cell. The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [2] |

A.3.3.7 DRX Configuration 7: DRX cycle = 640 ms and TAT = Infinity

Table A.3.3.7-1: DRX.7: DRX cycle = 640 ms and time alignment timer (TAT) = Infinity

| Field | Value |
|---------------------------|--|
| drx-onDurationTimer | 6 ms |
| drx-InactivityTimer | 1 ms |
| drx-RetransmissionTimerDL | 1 slot |
| drx-RetransmissionTimerUL | 1 slot |
| drx-LongCycleStartOffset | 640 ms |
| shortDRX | disable |
| TimeAlignmentTimer | Infinity |
| Note: | This DRX configuration is applicable for NR serving cell. The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [2] |

A.3.3.8 DRX Configuration 8: DRX cycle = 320 ms and TAT = Infinity

Table A.3.3.8-1: DRX.8: DRX cycle = 320 ms and time alignment timer (TAT) = Infinity

| Field | Value |
|---------------------------|--|
| drx-onDurationTimer | 6 ms |
| drx-InactivityTimer | 1 ms |
| drx-RetransmissionTimerDL | 1 slot |
| drx-RetransmissionTimerUL | 1 slot |
| drx-LongCycleStartOffset | 320 ms |
| shortDRX | disable |
| TimeAlignmentTimer | Infinity |
| Note: | This DRX configuration is applicable for NR serving cell. The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [2] |

A.3.3.9 DRX Configuration 9: DRX cycle = 40 ms and TAT = 500 ms

Table A.3.3.9-1: DRX.9: DRX cycle = 40 ms and time alignment timer (TAT) = 500 ms

| Field | Value |
|--------------------------|---|
| drx-onDurationTimer | psf2 |
| drx-InactivityTimer | psf100 |
| drx-RetransmissionTimer | psf16 |
| longDRX-CycleStartOffset | sf40, 0 |
| shortDRX | disable |
| TimeAlignmentTimer | 500 ms |
| Note: | This DRX configuration is applicable for E-UTRA serving cell. For further information see clause 6.3.2 in TS 36.331 [16]. |

A.3.3.10 DRX Configuration 10: DRX cycle = 640 ms

Table A.3.3.10-1: DRX.10: DRX cycle = 640 ms and time alignment timer (TAT) = 500 ms

| Field | Value |
|--------------------------|---|
| drx-onDurationTimer | psf6 |
| drx-InactivityTimer | psf1920 |
| drx-RetransmissionTimer | psf16 |
| longDRX-CycleStartOffset | sf640, 0 |
| shortDRX | disable |
| TimeAlignmentTimer | 500 ms |
| Note: | This DRX configuration is applicable for E-UTRA serving cell. For further information see clause 6.3.2 in TS 36.331 [16]. |

A.3.3.11 DRX Configuration 11: DRX cycle = 20 ms and TAT = Infinity

Table A.3.3.11-1: DRX.11: DRX cycle = 20 ms and time alignment timer (TAT) = Infinity

| Field | Value |
|--|----------|
| drx-onDurationTimer | 6 ms |
| drx-InactivityTimer | 1 ms |
| drx-RetransmissionTimerDL | 1 slot |
| drx-RetransmissionTimerUL | 1 slot |
| drx-LongCycleStartOffset | 20 ms |
| shortDRX | disable |
| TimeAlignmentTimer | Infinity |
| Note: This DRX configuration is applicable for NR serving cell. The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [2] | |

A.3.4 Test Cases with Different Channel Bandwidths

A.3.4.1 Test Cases with Different E-UTRA Channel Bandwidths

A.3.4.1.1 Introduction

In Annex A test cases involving E-UTRA cell(s) may be defined with different E-UTRA channel bandwidths to verify the same type of RRM requirement.

A.3.4.1.2 Principle of testing

If multiple test cases involving E-UTRA cell(s) are defined with different E-UTRA channel bandwidths to verify the same type of RRM requirement that is E-UTRA channel bandwidth independent, then the UE needs to be tested with only one channel bandwidth in each E-UTRA cell and with the same bandwidth in all the E-UTRA cells used in the test case.

A.3.5 Test Cases for Synchronous and Asynchronous DC Operations

A.3.5.1 EN-DC Test Cases for Synchronous and Asynchronous EN-DC Operations

A.3.5.1.1 Introduction

This clause defines a principle which is applicable to test cases verifying RRM requirements for EN-DC operation in synchronous and asynchronous scenarios.

In Annex A test cases may be defined in both synchronous EN-DC and asynchronous EN-DC scenarios to verify the same type of RRM requirement.

A.3.5.1.2 Principle of Testing

If EN-DC test cases are defined in both synchronous and asynchronous EN-DC scenarios to verify the same type of RRM requirement then the UE capable of both synchronous and asynchronous EN-DC operations needs to be tested with one of the tests in either synchronous or asynchronous EN-DC scenarios.

A.3.6 Antenna configurations

A.3.6.1 Antenna configurations for FR1

Unless otherwise specified, NR FDD or NR TDD cells in all RRM Test cases in AWGN propagation condition are configured with Antenna Configuration 1x2.

A.3.6.1.1 Antenna connection for 4 Rx capable UEs

A.3.6.1.1.1 Introduction

All tests in clause A.4 and A.6 are specified for UEs supporting 2RX. In this clause, the antenna connection method for applying 2RX tests to UEs supporting 4RX antenna ports is specified. No tests are currently specified in clause A.4 or A.6 which are applicable only to 4RX antenna ports, so 4RX capable UEs are always tested by reusing tests which were originally specified for 2RX UEs.

A.3.6.1.1.2 Principle of testing

A.3.6.1.1.2.1 Single carrier tests

For 4RX capable UEs supporting at least one 2RX band, the, all single carrier tests specified in clause A.4 and A.6 except those in A.4.7 and A.6.7 shall be tested on any band where 2RX is supported with the antenna connection specified in A.6.3.1.2.4. For single carrier tests specified in clause A.4.7 or A.6.7, all tests shall be tested with the antenna connection specified in A.3.6.1.1.2.4 for bands where 2RX is supported, and the antenna connection specified in A.3.6.1.1.2.5 for bands where 4RX is supported.

For 4RX capable UEs which do not support any 2RX band, all tests specified in clauses A.4 and A.6 shall be tested using the antenna connection specified in clause A.3.6.1.1.2.5. For radio link monitoring tests, the SNR levels are modified according to table A.3.6.1.1.2.1-1 and table A.3.6.1.1.2.1-2

Table A.3.6.1.1.2.1-1: Modified parameters for RLM out of sync testing with 4 RX antenna connection

| Test case | SNR during T3 (dB) | | | |
|-----------|--------------------|--------|--------|--------|
| | Test 1 | Test 2 | Test 3 | Test 4 |
| A.4.5.1.1 | -18 | N/A | N/A | N/A |
| A.4.5.1.3 | -18 | N/A | N/A | N/A |
| A.4.5.1.5 | -18 | N/A | N/A | N/A |
| A.4.5.1.7 | -18 | N/A | N/A | N/A |
| A.5.5.1.1 | -18 | N/A | N/A | N/A |
| A.5.5.1.3 | -18 | N/A | N/A | N/A |
| A.5.5.1.5 | -18 | N/A | N/A | N/A |
| A.5.5.1.7 | -18 | N/A | N/A | N/A |
| A.6.5.1.1 | -18 | N/A | N/A | N/A |
| A.6.5.1.3 | -18 | N/A | N/A | N/A |
| A.6.5.1.5 | -18 | N/A | N/A | N/A |
| A.6.5.1.7 | -18 | N/A | N/A | N/A |
| A.7.5.1.1 | -18 | N/A | N/A | N/A |
| A.7.5.1.3 | -18 | N/A | N/A | N/A |
| A.7.5.1.5 | -18 | N/A | N/A | N/A |
| A.7.5.1.7 | -18 | N/A | N/A | N/A |

Table A.3.6.1.1.2.1-2: Modified parameters for RLM in sync single carrier testing with 4 RX antenna connection

| Test case | SNR during T3 (dB) | | SNR during T4 (dB) | |
|-----------|--------------------|--------|--------------------|--------|
| | Test 1 | Test 2 | Test 1 | Test 2 |
| A.4.5.1.2 | -18 | N/A | -8 | N/A |
| A.4.5.1.4 | -18 | N/A | -8 | N/A |
| A.4.5.1.6 | -18 | N/A | -8 | N/A |
| A.4.5.1.8 | -18 | N/A | -8 | N/A |
| A.5.5.1.2 | -18 | N/A | -8 | N/A |
| A.5.5.1.4 | -18 | N/A | -8 | N/A |
| A.5.5.1.6 | -18 | N/A | -8 | N/A |
| A.5.5.1.8 | -18 | N/A | -8 | N/A |
| A.6.5.1.2 | -18 | N/A | -8 | N/A |
| A.6.5.1.4 | -18 | N/A | -8 | N/A |
| A.6.5.1.6 | -18 | N/A | -8 | N/A |
| A.6.5.1.8 | -18 | N/A | -8 | N/A |
| A.7.5.1.2 | -18 | N/A | -8 | N/A |
| A.7.5.1.4 | -18 | N/A | -8 | N/A |
| A.7.5.1.6 | -18 | N/A | -8 | N/A |
| A.7.5.1.8 | -18 | N/A | -8 | N/A |

Table A.3.6.1.1.2.1-3: Modified parameters for Beam Failure Detection and Link Recovery testing with 4 RX antenna connection

| Test case | SNR for RS in set q_0 during T3, T4 and T5 (dB) |
|-----------|---|
| | Test 1 |
| A.4.5.5.1 | -15 |
| A.4.5.5.2 | -15 |
| A.4.5.5.3 | -15 |
| A.4.5.5.4 | -15 |
| A.5.5.5.1 | -15 |
| A.5.5.5.2 | -15 |
| A.5.5.5.3 | -15 |
| A.5.5.5.4 | -15 |
| A.6.5.5.1 | -15 |
| A.6.5.5.2 | -15 |
| A.6.5.5.3 | -15 |
| A.6.5.5.4 | -15 |
| A.7.5.5.1 | -15 |
| A.7.5.5.2 | -15 |
| A.7.5.5.3 | -15 |
| A.7.5.5.4 | -15 |

A.3.6.1.1.2.2 Carrier aggregation tests

All carrier aggregation tests are performed using the antenna connection in clause A.3.6.1.1.2.4 for the PCell antenna connection if the PCell is on a band where 2RX is supported or the antenna connection in A.3.6.1.1.2.5 for the PCell antenna connection if the PCell is on a band where 4RX is supported.

All carrier aggregation tests are performed using the antenna connection in clause A.3.6.1.1.2.4 for the SCell antenna connection if an SCell is on band where 2RX is supported or the testing procedure in A.3.6.1.1.2.5 for the SCell antenna connection if an SCell is on a band where 4RX is supported.

A.3.6.1.1.2.3 EN-DC tests

All carrier aggregation tests are performed using the antenna connection in clause A.3.6.1.1.2.6 for the PCell antenna connection if the PCell is on a band where 2RX is supported or the antenna connection in A.3.6.1.1.2.7 for the PCell antenna connection if the PCell is on a band where 4RX is supported.

All carrier aggregation tests are performed using the antenna connection in clause A.3.6.1.1.2.4 for the PSCell or SCell antenna connection if an SCell is on band where 2RX is supported or the testing procedure in A.3.6.1.1.2.5 for the SCell antenna connection if an SCell or PSCell is on a band where 4RX is supported.

A.3.6.1.1.2.4 Antenna connection for bands where 2RX is supported

For bands where 2RX is supported, it is left to the UE declaration and AP configuration to decide which 2 of the 4 Rx ports are connected with data source from system simulator. The remaining 2 Rx ports shall be connected with zero input. No test parameters or requirements are modified.

A.3.6.1.1.2.5 Antenna connection for bands where 4RX is supported

For bands where 4RX is supported, all 4 RX antennas are connected with data source from system simulator. The system simulator shall provide independent noise and fading (low correlation) for each antenna port. Except for the modifications to radio link monitoring thresholds described in clauses A.3.6.1.1.2.1 and A.3.6.1.1.2.2, no test parameters or requirements are modified.

A.3.6.1.1.2.6 EN-DC LTE Antenna connection for bands where 2RX is supported

For bands where LTE 2RX is supported, it is left to the UE declaration and AP configuration to decide which 2 of the 4 Rx ports are connected with data source from system simulator. The remaining 2 Rx ports shall be connected with zero input. No test parameters or requirements are modified.

A.3.6.1.1.2.7 EN-DC LTE Antenna connection for bands where 4RX is supported

For bands where LTE 4RX is supported, all 4 RX antennas are connected with data source from system simulator. The system simulator shall provide independent noise and fading (low correlation) for each antenna port. Except for the modifications to radio link monitoring thresholds described in clauses A.3.8.1.2.1 and A.3.8.1.2.2 of TS 36.133 [15], no test parameters or requirements are modified.

A.3.6.2 Antenna configurations for FR2

Unless otherwise specified, the default Downlink Antenna Configuration for NR FR2 cells is 1x2.

In case of Downlink Antenna Configuration 2x2 for NR FR2 cells, unless otherwise specified, the downlink signal is transmitted over the two polarizations (V and H) of the dual polarized antenna of the test equipment.

In both cases, the downlink signal is received assuming 2 UE baseband receivers. As the UE is tested following the Blackbox Approach with regard to the UE Rx antennas, the exact UE Rx antenna configuration is not relevant for the test configuration and has no impact on the test implementation.

A.3.7 EN-DC test setup

A.3.7.1 Introduction

A.3.7.2 E-UTRAN Serving Cell Parameters

A.3.7.2.1 E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) in FR1

Table A.3.7.2.1-1 defines cell specific test parameters for E-UTRAN cell which can be used in EN-DC test cases or in any test case comprising at least one E-UTRA serving cell with all NR cells in FR1. Unless otherwise stated within the test, all measurements in Annex A.4 and A.5 are performed only on the NR carrier. The E-UTRA serving cell shall be configured to not interfere with NR operation and the E-UTRA serving cell signal power shall not be critical to the test purpose.

Table A.3.7.2.1-1: E-UTRAN cell specific test parameters for tests with all NR cells in FR1

| Parameter | Unit | E-UTRAN Cell | |
|---|------------|---|------|
| Duplex mode | | FDD or TDD | |
| TDD special subframe configuration ^{Note1} | | 6 | |
| TDD uplink-downlink configuration ^{Note1} | | 1 | |
| BW_{channel} | | 5 MHz: $N_{RB,c} = 25$ 10 MHz: $N_{RB,c} = 50$ 20 MHz: $N_{RB,c} = 100$ | |
| PDSCH parameters: DL Reference Measurement Channel ^{Note2} | | 5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD | |
| PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2} | | 5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD | |
| OCNG Patterns ^{Note2} | | 5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD | |
| PBCH_RA | dB | 0 | |
| PBCH_RB | dB | | |
| PSS_RA | dB | | |
| SSS_RA | dB | | |
| PCFICH_RB | dB | | |
| PHICH_RA | dB | | |
| PHICH_RB | dB | | |
| PDCCH_RA | dB | | |
| PDCCH_RB | dB | | |
| PDSCH_RA | dB | | |
| PDSCH_RB | dB | | |
| OCNG_RA ^{Note3} | dB | | |
| OCNG_RB ^{Note3} | dB | | |
| N_{oc} ^{Note4} | dBm/15 kHz | | -104 |
| \bar{E}_s/N_{oc} | dB | | 17 |

| | | |
|---|------------|------------------------------|
| \hat{E}_s/I_{ot} | dB | 17 |
| RSRP ^{Note5} | dBm/15 kHz | -87 |
| SCH_RP ^{Note5} | dBm/15 kHz | -87 |
| I_o ^{Note5} | dBm/Ch BW | $-59.13+10\log(N_{RB,c}/50)$ |
| Propagation Condition | | AWGN |
| Antenna Configuration | | 1x2 |
| <p>Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211.</p> <p>Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 respectively.</p> <p>Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 5: E_s/I_{ot}, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | |

A.3.7.2.2 E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) in FR2

Table A.3.7.2.2-1 defines cell specific test parameters for E-UTRAN cell which can be used in EN-DC test cases or in any test case comprising at least one E-UTRA serving cell with one or more NR cells in FR2.

Table A.3.7.2.2-1: E-UTRAN cell specific test parameters for tests with one or more NR cells in FR2

| Parameter | Unit | E-UTRAN Cell |
|---|------|---|
| Duplex mode | | FDD or TDD |
| TDD special subframe configuration ^{Note1} | | 6 |
| TDD uplink-downlink configuration ^{Note1} | | 1 |
| $BW_{channel}$ | MHz | 5 MHz: $N_{RB,c} = 25$ 10 MHz: $N_{RB,c} = 50$ 20 MHz: $N_{RB,c} = 100$ |
| PDSCH parameters: DL Reference Measurement Channel ^{Note2} | | 5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD |
| PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2} | | 5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD |
| OCNG Patterns ^{Note2} | | 5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD |
| PBCH_RA | dB | 0 |
| PBCH_RB | dB | |
| PSS_RA | dB | |
| SSS_RA | dB | |
| PCFICH_RB | dB | |
| PHICH_RA | dB | |
| PHICH_RB | dB | |

| | | |
|--|----|--|
| PDCCH_RA | dB | |
| PDCCH_RB | dB | |
| PDSCH_RA | dB | |
| PDSCH_RB | dB | |
| OCNG_RA ^{Note3} | dB | |
| OCNG_RB ^{Note3} | dB | |
| <p>Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211.</p> <p>Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 respectively.</p> <p>Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 4: The E-UTRA signal is required only to ensure the E-UTRA link to the DUT in the EN-DC operation. The Test System shall provide a stable and noise-free E-UTRA signal without need of precise propagation modelling, path loss and polarization control. Further details of the E-UTRA signal configuration are not defined as part of the cell specific test parameters, since the E-UTRA link is not under performance verification and is not expected to influence the NR FR2 requirement.</p> | | |

A.3.7A NR FR1-FR2 test setup

Some Test cases in clause A.7 have NR cells in both FR1 and FR2. Unless otherwise stated within the test, the NR FR1 Cell signal is required only to provide a link to the UE under test. The Test System shall provide a stable and noise-free NR FR1 signal without need of precise propagation modelling, path loss and polarization control. Further details of the NR FR1 signal configuration are not defined as part of the cell specific test parameters, since the NR FR1 link is not under performance verification and is not expected to influence the test purpose.

A.3.8 PRACH configurations

A.3.8.1 Introduction

This clause provides the typical PRACH configurations used for RRM test cases defined in Annex A. To note that for other parameters not listed in this clause, either it can be derived from the set up of each test or it is subjected to RAN5 specifications.

A.3.8.2 PRACH configurations in FR1

A.3.8.2.1 FR1 PRACH configuration 1

FR1 PRACH configuration 1 in this clause provides the typical PRACH configuration for SSB-based contention based random access in FR1.

Table A.3.8.2.1-1: Parameters for FR1 PRACH configuration 1

| Field | Value | Comment |
|--|------------------------|---|
| prach-ConfigurationIndex | 102 | 10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6]. |
| msg1-SubcarrierSpacing | Same as UL carrier SCS | |
| totalNumberOfRA-Preambles | 48 | Total number of preambles used for contention based and contention free random access |
| numberOfRA-PreamblesGroupA | 48 | No group B. |
| prach-RootSequenceIndex | 0 | Logic sequence index = 0, resulting in root sequence = 1. |
| ssb-perRACH-OccasionAndCB-PreamblesPerSSB | oneFourth, n48 | OneFourth: 1 SSB associated with 4 RACH occasions n48: 48 contention based preambles per SSB |
| msg1-FDM | One | One PRACH transmission occasions FDMed in one time instance. |
| rsrp-ThresholdSSB | RSRP_51 | The actual value of the threshold is -105dBm, as defined in TS 38.331 [2]. |
| ra-ContentionResolutionTimer | sf48 | 48 sub-frames |
| powerRampingStep | dB2 | |
| preambleReceivedTargetPower | dBm-120 | |
| preambleTransMax | n6 | Max number of RA preamble transmission performed before declaring a failure is 6 |
| ra-ResponseWindow | sl10 | 10 slots |
| zeroCorrelationZoneConfig | 11 | N-CS configuration, N _{CS} = 23 |
| Backoff Parameter Index | 2 | 20ms, as defined in table 7.2-1 in TS 38.321 [7]. |
| Note: For further information see clause 6.3.2 in TS 38.331 [2]. | | |

A.3.8.2.2 FR1 PRACH configuration 2

FR1 PRACH configuration 2 in this clause provides the typical PRACH configuration for SSB based non-contention based random access in FR1.

Table A.3.8.2.2-1: Parameters for FR1 PRACH configuration 2

| Field | Value | Comment |
|--|------------------------|--|
| prach-ConfigurationIndex | 102 | 10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6]. |
| msg1-SubcarrierSpacing | Same as UL carrier SCS | |
| totalNumberOfRA-Preambles | 48 | Total number of preambles used for contention based and contention free random access |
| numberOfRA-PreamblesGroupA | 48 | No group B. |
| prach-RootSequenceIndex | 0 | Logic sequence index = 0, resulting in root sequence = 1. |
| ssb-perRACH-Occasion | oneFourth | OneFourth: 1 SSB associated with 4 RACH occasions |
| msg1-FDM | One | One PRACH transmission occasions FDMed in one time instance. |
| powerRampingStep | dB2 | |
| preambleReceivedTargetPower | dBm-120 | |
| preambleTransMax | n6 | Max number of RA preamble transmission performed before declaring a failure is 6 |
| ra-ResponseWindow | sl10 | 10 slots |
| zeroCorrelationZoneConfig | 11 | N-CS configuration, Ncs = 23 |
| Backoff Parameter Index | 2 | 20ms, as defined in table 7.2-1 in TS 38.321 [7]. |
| <i>ssb-ResourceList</i> | ra-PreambleIndex = 50 | Associated with SSB index 0. UE doesn't use <i>ssb-ResourceList</i> and <i>BFR-SSB-Resource</i> IEs at the same time. UE doesn't use this field if is transmitting CFRA to convey BFR. |
| <i>BFR-SSB-Resource</i> | ra-PreambleIndex = 50 | Associated with SSB index 0. UE doesn't use <i>ssb-ResourceList</i> and <i>BFR-SSB-Resource</i> IEs at the same time. UE uses this field only if is transmitting CFRA to convey BFR |
| ra-ssb-OccasionMaskIndex | 1 | PRACH occasion index 1 is allowed |
| rsrp-ThresholdSSB | RSRP_51 | The actual value of the threshold is -105dBm, as defined in TS 38.331 [2]. |
| Note: For further information see clause 6.3.2 in TS 38.331 [2]. | | |

A.3.8.2.3 FR1 PRACH configuration 3

FR1 PRACH configuration 3 in this clause provides the typical PRACH configuration for CSI-RS based non-contention based random access in FR1.

Table A.3.8.2.3-1: Parameters for FR1 PRACH configuration 3

| Field | Value | Comment |
|--|------------------------------|---|
| <i>prach-ConfigurationIndex</i> | 102 | 10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6]. |
| <i>msg1-SubcarrierSpacing</i> | Same as UL carrier SCS | |
| <i>totalNumberOfRA-Preambles</i> | 48 | Total number of preambles used for contention based and contention free random access |
| <i>numberOfRA-PreamblesGroupA</i> | 48 | No group B. |
| <i>prach-RootSequenceIndex</i> | 0 | Logic sequence index = 0, resulting in root sequence = 1. |
| <i>ssb-perRACH-Occasion</i> | oneFourth | OneFourth: 1 SSB associated with 4 RACH occasions |
| <i>msg1-FDM</i> | One | One PRACH transmission occasions FDMed in one time instance. |
| <i>powerRampingStep</i> | dB2 | |
| <i>preambleReceivedTargetPower</i> | dBm-120 | |
| <i>preambleTransMax</i> | n6 | Max number of RA preamble transmission performed before declaring a failure is 6 |
| <i>ra-ResponseWindow</i> | sl10 | 10 slots |
| <i>zeroCorrelationZoneConfig</i> | 11 | N-CS configuration, Ncs = 23 |
| <i>Backoff Parameter Index</i> | 2 | 20ms, as defined in table 7.2-1 in TS 38.321 [7]. |
| <i>csirs-ResourceList</i> | <i>ra-PreambleIndex</i> = 50 | Associated with CSI-RS configured |
| <i>ra-OccasionList</i> | 1 | RA occasions allowed corresponding to CSI-RS |
| <i>rsrp-ThresholdCSI-RS</i> | RSRP_51 | The actual value of the threshold is -105dBm, as defined in TS 38.331 [2]. |
| Note: For further information see clause 6.3.2 in TS 38.331 [2]. | | |

A.3.8.2.4 FR1 PRACH configuration 4

FR1 PRACH configuration 4 in this clause provides the PRACH configuration for CSI-RS based non-contention based random access in FR1 to convey BFR.

Table A.3.8.2.4-1: Parameters for FR1 PRACH configuration 4

| Field | Value | Comment |
|--|-----------------------|---|
| prach-ConfigurationIndex | 8 | 10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6]. |
| totalNumberOfRA-Preambles | 48 | Total number of preambles used for contention based and contention free random access |
| numberOfRA-PreamblesGroupA | 48 | No group B. |
| prach-RootSequenceIndex | 0 | Logic sequence index = 0, resulting in root sequence = 1. |
| ssb-perRACH-Occasion | oneFourth | OneFourth: 1 SSB associated with 4 RACH occasions |
| msg1-FDM | One | One PRACH transmission occasions FDMed in one time instance. |
| powerRampingStep | dB2 | |
| preambleReceivedTargetPower | dBm-120 | |
| preambleTransMax | n200 | Max number of RA preamble transmission performed before declaring a failure is 200 |
| ra-ResponseWindow | s1 | 1 slot |
| zeroCorrelationZoneConfig | 11 | N-CS configuration, $N_{CS} = 93$ |
| Backoff Parameter Index | 2 | 20ms, as defined in table 7.2-1 in TS 38.321 [7]. |
| BFR-CSIRS-Resource | ra-PreambleIndex = 50 | Associated with CSI-RS configured |
| ra-OccasionList | 1 | RA occasions allowed corresponding to CSI-RS |
| rsrp-ThresholdSSB | RSRP_51 | The actual value of the threshold is -105dBm, as defined in TS 38.331 [2]. |
| Note: For further information see clause 6.3.2 in TS 38.331 [2]. | | |

A.3.8.3 PRACH configurations in FR2

A.3.8.3.1 FR2 PRACH configuration 1

FR2 PRACH configuration 1 in this clause provides the typical PRACH configuration for SSB-based contention based random access in FR2.

Table A.3.8.3.1-1: Parameters for FR2 PRACH configuration 1

| Field | Value | Comment |
|--|------------------------|--|
| prach-ConfigurationIndex | 190 | Preamble Format C2, with 10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-4 in TS 38.211 [6]. |
| msg1-SubcarrierSpacing | Same as UL carrier SCS | |
| totalNumberOfRA-Preambles | 48 | Total number of preambles used for contention based and contention free random access |
| numberOfRA-PreamblesGroupA | 48 | No group B. |
| prach-RootSequenceIndex | 0 | Logic sequence index = 0, resulting in root sequence = 1. |
| ssb-perRACH-OccasionAndCB-PreamblesPerSSB | oneFourth, n48 | OneFourth: 1 SSB associated with 4 RACH occasions n48: 48 contention based preambles per SSB |
| msg1-FDM | One | One PRACH transmission occasions FDMed in one time instance. |
| rsrp-ThresholdSSB | RSRP_51 | The actual value of the threshold is -105dBm, as defined in TS 38.331 [2]. |
| ra-ContentionResolutionTimer | sf48 | 48 sub-frames |
| powerRampingStep | dB2 | |
| preambleReceivedTargetPower | dBm-120 | |
| preambleTransMax | n6 | Max number of RA preamble transmission performed before declaring a failure is 6 |
| ra-ResponseWindow | sl10 | 10 slots |
| zeroCorrelationZoneConfig | 11 | N-CS configuration, N _{CS} = 23 |
| Backoff Parameter Index | 2 | 20 ms, as defined in table 7.2-1 in TS 38.321 [7]. |
| Note: For further information see clause 6.3.2 in TS 38.331 [2]. | | |

A.3.8.3.2 FR2 PRACH configuration 2

FR2 PRACH configuration 2 in this clause provides the typical PRACH configuration for SSB based non-contention based random access in FR2.

Table A.3.8.3.2-1: Parameters for FR2 PRACH configuration 2

| Field | Value | Comment |
|--|------------------------|--|
| prach-ConfigurationIndex | 190 | Preamble Format C2, with 10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-4 in TS 38.211 [6]. |
| msg1-SubcarrierSpacing | Same as UL carrier SCS | |
| totalNumberOfRA-Preambles | 48 | Total number of preambles used for contention based and contention free random access |
| numberOfRA-PreamblesGroupA | 48 | No group B. |
| prach-RootSequenceIndex | 0 | Logic sequence index = 0, resulting in root sequence = 1. |
| ssb-perRACH-Occasion | oneFourth | OneFourth: 1 SSB associated with 4 RACH occasions |
| msg1-FDM | One | One PRACH transmission occasions FDMed in one time instance. |
| powerRampingStep | dB2 | |
| preambleReceivedTargetPower | dBm-120 | |
| preambleTransMax | n6 | Max number of RA preamble transmission performed before declaring a failure is 6 |
| ra-ResponseWindow | sl10 | 10 slots |
| zeroCorrelationZoneConfig | 11 | N-CS configuration, Ncs = 23 |
| Backoff Parameter Index | 2 | 20 ms, as defined in table 7.2-1 in TS 38.321 [7]. |
| <i>ssb-ResourceList</i> | ra-PreambleIndex = 50 | Associated with SSB index 0. UE doesn't use <i>ssb-ResourceList</i> and <i>BFR-SSB-Resource</i> IEs at the same time. UE doesn't use this field if is transmitting CFRA to convey BFR. |
| <i>BFR-SSB-Resource</i> | ra-PreambleIndex = 50 | Associated with SSB index 0. UE doesn't use <i>ssb-ResourceList</i> and <i>BFR-SSB-Resource</i> IEs at the same time. UE uses this field only if is transmitting CFRA to convey BFR |
| ra-ssb-OccasionMaskIndex | 1 | PRACH occasion index 1 is allowed |
| rsrp-ThresholdSSB | RSRP_51 | The actual value of the threshold is -105dBm, as defined in TS 38.331 [2]. |
| Note: For further information see clause 6.3.2 in TS 38.331 [2]. | | |

A.3.8.3.3 FR2 PRACH configuration 3

FR2 PRACH configuration 3 in this clause provides the typical PRACH configuration for CSI-RS based non-contention based random access in FR2.

| Field | Value | Comment |
|--|------------------------|--|
| prach-ConfigurationIndex | 190 | Preamble Format C2, with 10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-4 in TS 38.211 [6]. |
| msg1-SubcarrierSpacing | Same as UL carrier SCS | |
| totalNumberOfRA-Preambles | 48 | Total number of preambles used for contention based and contention free random access |
| numberOfRA-PreamblesGroupA | 48 | No group B. |
| prach-RootSequenceIndex | 0 | Logic sequence index = 0, resulting in root sequence = 1. |
| ssb-perRACH-Occasion | oneFourth | OneFourth: 1 SSB associated with 4 RACH occasions |
| msg1-FDM | One | One PRACH transmission occasions FDMed in one time instance. |
| powerRampingStep | dB2 | |
| preambleReceivedTargetPower | dBm-120 | |
| preambleTransMax | n6 | Max number of RA preamble transmission performed before declaring a failure is 6 |
| ra-ResponseWindow | sl10 | 10 slots |
| zeroCorrelationZoneConfig | 11 | N-CS configuration, N _{cs} = 23 |
| Backoff Parameter Index | 2 | 20 ms, as defined in table 7.2-1 in TS 38.321 [7]. |
| csirs-ResourceList | ra-PreambleIndex = 50 | Associated with CSI-RS configured |
| ra-OccasionList | 1 | RA occasions allowed corresponding to CSI-RS |
| rsrp-ThresholdCSI-RS | RSRP_51 | The actual value of the threshold is -105dBm, as defined in TS 38.331 [2]. |
| Note: For further information see clause 6.3.2 in TS 38.331 [2]. | | |

A.3.8.3.4 FR2 PRACH configuration 4

FR2 PRACH configuration 4 in this clause provides the PRACH configuration for CSI-RS based non-contention based random access in FR2 to convey BFR.

| Field | Value | Comment |
|--|------------------------|--|
| prach-ConfigurationIndex | 190 | Preamble Format C2, with 10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-4 in TS 38.211 [6]. |
| msg1-SubcarrierSpacing | Same as UL carrier SCS | |
| totalNumberOfRA-Preambles | 48 | Total number of preambles used for contention based and contention free random access |
| numberOfRA-PreamblesGroupA | 48 | No group B. |
| prach-RootSequenceIndex | 0 | Logic sequence index = 0, resulting in root sequence = 1. |
| ssb-perRACH-Occasion | oneFourth | OneFourth: 1 SSB associated with 4 RACH occasions |
| msg1-FDM | One | One PRACH transmission occasions FDMed in one time instance. |
| powerRampingStep | dB2 | |
| preambleReceivedTargetPower | dBm-120 | |
| preambleTransMax | n200 | Max number of RA preamble transmission performed before declaring a failure is 200. |
| ra-ResponseWindow | sl40 | 40 slots |
| zeroCorrelationZoneConfig | 11 | N-CS configuration, N _{cs} = 23 |
| Backoff Parameter Index | 2 | 20 ms, as defined in table 7.2-1 in TS 38.321 [7]. |
| BFR-CSIRS-Resource | ra-PreambleIndex = 50 | Associated with CSI-RS configured |
| ra-OccasionList | 1 | RA occasions allowed corresponding to CSI-RS |
| rsrp-ThresholdSSB | RSRP_51 | The actual value of the threshold is -105dBm, as defined in TS 38.331 [2]. |
| Note: For further information see clause 6.3.2 in TS 38.331 [2]. | | |

A.3.9 BWP configurations

A.3.9.1 Introduction

This clause provides the typical BWP configurations used for RRM test cases defined in Annex A. For downlink BWP, both initial BWP and dedicated BWP configurations are specified in clause A.3.9.2 and for uplink BWP, both initial BWP and dedicated BWP configurations are specified in clause A.3.9.3. To note that for other parameters not listed in this clause, either it can be derived from the set up of each test or it is subjected to RAN5 specifications.

A.3.9.2 Downlink BWP configurations

A.3.9.2.1 Initial BWP

Table A.3.9.2.1-1: Downlink BWP patterns for initial BWP configuration

| BWP Parameters | Unit | Values | | |
|---|------|---|--|--|
| Reference BWP | | DLBWP.0.1 | DLBWP.0.2 | |
| Starting PRB index | | 0 | RB _a ^{Note 1} | |
| Bandwidth | RB | Same as RF channel defined in each test | same as RMSI CORESET (CORESET #0) defined in each test | |
| Note 1: RB _a is the lowest PRB index to guarantee the BWP including SSB PRB index (RB _J , RB _{J+1} ,..., RB _{J+19}) which is defined in Clause A.3.10. | | | | |

A.3.9.2.2 Dedicated BWP

Table A.3.9.2.2-1: Downlink BWP patterns for dedicated BWP configuration

| BWP Parameters | Unit | Values | | |
|---|------|---|---|---|
| Reference BWP | | DLBWP.1.1 | DLBWP.1.2 | DLBWP.1.3 |
| Starting PRB index | | 0 | RB _b ^{Note 1} | RB _a ^{Note 2} |
| Bandwidth | RB | Same as RF channel defined in each test | 25 for SCS = 15KHz, 51 for SCS = 30KHz, 32 for SCS = 120KHz | 25 for SCS = 15KHz, 51 for SCS = 30KHz, 32 for SCS = 120KHz |
| Note 1: RB _b is the lowest PRB index to guarantee the BWP not fully overlapped with SSB PRB index (RB _J , RB _{J+1} ,..., RB _{J+19}) which is defined in Clause A.3.10. | | | | |
| Note 2: RB _a is the lowest PRB index to guarantee the BWP including SSB PRB index (RB _J , RB _{J+1} ,..., RB _{J+19}) which is defined in Clause A.3.10. | | | | |

A.3.9.3 Uplink BWP configurations

A.3.9.3.1 Initial BWP

Table A.3.9.3.1-1: Uplink BWP patterns for initial BWP configuration

| BWP Parameters | Unit | Values | | |
|---|------|---|--|--|
| Reference BWP | | ULBWP.0.1 | ULBWP.0.2 | |
| Starting PRB index | | 0 | RB _a ^{Note 1} | |
| Bandwidth | RB | Same as RF channel defined in each test | same as RMSI CORESET (CORESET #0) defined in each test | |
| Note 1: RB _a is the lowest PRB index to guarantee the BWP including SSB PRB index (RB _J , RB _{J+1} ,..., RB _{J+19}) which is defined in Clause A.3.10. | | | | |

A.3.9.3.2 Dedicated BWP

Table A.3.9.3.2-1: Uplink BWP patterns for dedicated BWP configuration

| BWP Parameters | Unit | Values | | |
|--------------------|--|---|---|---|
| Reference BWP | | ULBWP.1.1 | ULBWP.1.2 | ULBWP.1.3 |
| Starting PRB index | | 0 | RB _b ^{Note 1} | RB _a ^{Note 2} |
| Bandwidth | RB | Same as RF channel defined in each test | 25 for SCS = 15KHz, 51 for SCS = 30KHz, 32 for SCS = 120KHz | 25 for SCS = 15KHz, 51 for SCS = 30KHz, 32 for SCS = 120KHz |
| Note 1: | RB _b is the lowest PRB index to guarantee the BWP not fully overlapped with SSB PRB index (RB _J , RB _{J+1} , ..., RB _{J+19}) which is defined in Clause A.3.10. | | | |
| Note 2: | RB _a is the lowest PRB index to guarantee the BWP including SSB PRB index (RB _J , RB _{J+1} , ..., RB _{J+19}) which is defined in Clause A.3.10. | | | |

A.3.10 SSB Configurations

A.3.10.1 SSB Configurations for FR1

A.3.10.1.1 SSB pattern 1 in FR1: SSB allocation for SSB SCS=15 kHz in 10 MHz

Table A.3.10.1.1-1: SSB.1 FR1: SSB Pattern 1 for SSB SCS=15 kHz in 10 MHz channel

| SSB Parameters | Values |
|---|---|
| Channel bandwidth | 10 MHz |
| SSB SCS | 15 kHz |
| SSB periodicity (T _{SSB}) | 20 ms |
| Number of SSBs per SS-burst | 1 |
| SS/PBCH block index | 0 |
| Symbol numbers containing SSB ^{Note 2} | 2-5 |
| Slot numbers containing SSB ^{Note 2} | 0 |
| SFN containing SSB | SFN mod (max(T _{SSB} ,10ms)/10ms) = 0 |
| RB numbers containing SSB within channel BW | (RB _J , RB _{J+1} , ..., RB _{J+19}) ^{Note 1} |
| Note 1: | RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. |
| Note 2: | These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves. |

A.3.10.1.2 SSB pattern 2 in FR1: SSB allocation for SSB SCS=30 kHz in 40 MHz

Table A.3.10.1.2-1: SSB.2 FR1: SSB Pattern 2 for SSB SCS=30 kHz in 40 MHz channel

| SSB Parameters | Values |
|---|--|
| Channel bandwidth | 40 MHz |
| SSB SCS | 30 kHz |
| SSB periodicity (T_{SSB}) | 20 ms |
| Number of SSBs per SS-burst | 1 |
| SS/PBCH block index | 0 |
| Symbol numbers containing SSB ^{Note 3} | 4-7 or 2-5 ^{Note 2} |
| Slot numbers containing SSB ^{Note 3} | 0 |
| SFN containing SSB | SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0 |
| RB numbers containing SSB within channel BW | $(RB_J, RB_{J+1}, \dots, RB_{J+19})$ ^{Note 1} |
| Note 1: | RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. |
| Note 2: | Symbols 4-7 is chosen, if the SSB pattern Case B should be used for the current band as indicated by Table 5.4.3.3-1 of TS 38.104 [13]; Otherwise, symbol 2-5 is chosen. |
| Note 3: | These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves. |

A.3.10.1.3 SSB pattern 3 in FR1: SSB allocation for SSB SCS=15 kHz in 10 MHz

Table A.3.10.1.3-1: SSB.3 FR1: SSB Pattern 3 for SSB SCS=15 kHz in 10 MHz channel

| SSB Parameters | Values | |
|---|---|------|
| Channel bandwidth | 10 MHz | |
| SSB SCS | 15 kHz | |
| SSB periodicity (T_{SSB}) | 20 ms | |
| Number of SSBs per SS-burst | 2 | |
| SS/PBCH block index | 0 | 1 |
| Symbol numbers containing SSB ^{Note 2} | 2-5 | 8-11 |
| Slot numbers containing SSB ^{Note 2} | 0 | 0 |
| SFN containing SSB | SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0 | |
| RB numbers containing SSB within channel BW | $(RB_J, RB_{J+1}, \dots, RB_{J+19})$ ^{Note 1} | |
| Note 1: | RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. | |
| Note 2: | These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves. | |

A.3.10.1.4 SSB pattern 4 in FR1: SSB allocation for SSB SCS=30 kHz in 40 MHz

Table A.3.10.1.4-1: SSB.4 FR1: SSB Pattern 4 for SSB SCS=30 kHz in 40 MHz channel

| SSB Parameters | Values | |
|---|--|------|
| Channel bandwidth | 40 MHz | |
| SSB SCS | 30 kHz | |
| SSB periodicity (T_{SSB}) | 20 ms | |
| Number of SSBs per SS-burst | 2 | |
| SS/PBCH block index | 0 | 1 |
| Symbol numbers containing SSB ^{Note 3} | 4-7 or 2-5 ^{Note 2} | 8-11 |
| Slot numbers containing SSB ^{Note 3} | 0 | 0 |
| SFN containing SSB | SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0 | |
| RB numbers containing SSB within channel BW | $(RB_J, RB_{J+1}, \dots, RB_{J+19})$ ^{Note 1} | |
| Note 1: | RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. | |
| Note 2: | Symbols 4-7 is chosen, if the SSB pattern Case B should be used for the current band as indicated by Table 5.4.3.3-1 of TS 38.104 [13]; Otherwise, symbol 2-5 is chosen. | |
| Note 3: | These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves. | |

A.3.10.1.5 SSB pattern 5 in FR1: SSB allocation for SSB SCS=15 kHz starting from odd SFN in 10 MHz

Table A.3.10.1.5-1: SSB.5 FR1: SSB Pattern 5 for SSB SCS=15 kHz in 10 MHz channel

| SSB Parameters | Values |
|---|---|
| Channel bandwidth | 10 MHz |
| SSB SCS | 15 kHz |
| SSB periodicity (T_{SSB}) | 20 ms |
| Number of SSBs per SS-burst | 1 |
| SS/PBCH block index | 0 |
| Symbol numbers containing SSB ^{Note 2} | 2-5 |
| Slot numbers containing SSB ^{Note 2} | 0 |
| SFN containing SSB | $SFN \bmod (\max(T_{SSB}, 10\text{ms})/10\text{ms}) = 1$ |
| RB numbers containing SSB within channel BW | $(RB_J, RB_{J+1}, \dots, RB_{J+19})^{\text{Note 1}}$ |
| Note 1: | RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. |
| Note 2: | These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves. |

A.3.10.1.6 SSB pattern 6 in FR1: SSB allocation for SSB SCS=30 kHz starting from odd SFN in 40 MHz

Table A.3.10.1.6-1: SSB.6 FR1: SSB Pattern 6 for SSB SCS=30 kHz in 40 MHz channel

| SSB Parameters | Values |
|---|--|
| Channel bandwidth | 40 MHz |
| SSB SCS | 30 kHz |
| SSB periodicity (T_{SSB}) | 20 ms |
| Number of SSBs per SS-burst | 1 |
| SS/PBCH block index | 0 |
| Symbol numbers containing SSB ^{Note 3} | 4-7 or 2-5 ^{Note 2} |
| Slot numbers containing SSB ^{Note 3} | 0 |
| SFN containing SSB | $SFN \bmod (\max(T_{SSB}, 10\text{ms})/10\text{ms}) = 1$ |
| RB numbers containing SSB within channel BW | $(RB_J, RB_{J+1}, \dots, RB_{J+19})^{\text{Note 1}}$ |
| Note 1: | RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. |
| Note 2: | Symbols 4-7 is chosen, if the SSB pattern Case B should be used for the current band as indicated by Table 5.4.3.3-1 of TS 38.104 [13]; Otherwise, symbol 2-5 is chosen. |
| Note 3: | These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves. |

A.3.10.2 SSB Configurations for FR2

A.3.10.2.1 SSB pattern 1 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz

Table A.3.10.2.1-1: SSB.1 FR2: SSB Pattern 1 for SSB SCS = 120 kHz in 100 MHz channel with 2 SSBs per SS-burst

| SSB Parameters | Values | |
|--|---|------|
| Channel bandwidth | 100 MHz | |
| SSB SCS | 120 kHz | |
| SSB periodicity (T_{SSB}) | 20 ms | |
| Number of SSBs per SS-burst | 2 | |
| SS/PBCH block index | 0 | 1 |
| Symbol numbers containing SSBs ^{Note 2} | 4-7 | 8-11 |
| Slot numbers containing SSB ^{Note 2} | 0 | 0 |
| SFN containing SSB | SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0 | |
| RB numbers containing SSBs within channel BW | $(RB_J, RB_{J+1}, \dots, RB_{J+19})$ ^{Note 1} | |
| Note 1: | RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. | |
| Note 2: | These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves. | |

A.3.10.2.2 SSB pattern 2 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz

Table A.3.10.2.2-1: SSB.2 FR2: SSB Pattern 2 for SSB SCS = 240 kHz in 100 MHz channel with 2 SSBs per SS-burst

| SSB Parameters | Values | | |
|--|---|-------|-----|
| Channel bandwidth | 100 MHz | | |
| SSB SCS | 240 kHz | | |
| SSB periodicity (T_{SSB}) | 20 ms | | |
| Number of SSBs per SS-burst | 2 | | |
| SS/PBCH block index | 0 | 1 | |
| Symbol numbers containing SSBs ^{Note 2} | 8-11 | 12-13 | 0-1 |
| Slot numbers containing SSB ^{Note 2} | 0 | 0 | 1 |
| SFN containing SSB | SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0 | | |
| RB numbers containing SSBs within channel BW | $(RB_J, RB_{J+1}, \dots, RB_{J+19})$ ^{Note 1} | | |
| Note 1: | RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. | | |
| Note 2: | These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves. | | |

A.3.10.2.3 SSB pattern 3 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz

Table A.3.10.2.3-1: SSB.3 FR2: SSB Pattern 3 for SSB SCS = 120 kHz in 100 MHz channel with 1 SSB per SS-burst

| SSB Parameters | Values |
|--|---|
| Channel bandwidth | 100 MHz |
| SSB SCS | 120 kHz |
| SSB periodicity (T_{SSB}) | 20 ms |
| Number of SSBs per SS-burst | 1 |
| SS/PBCH block index | 0 |
| Symbol numbers containing SSBs ^{Note 2} | 4-7 |
| Slot numbers containing SSB ^{Note 2} | 0 |
| SFN containing SSB | $SFN \bmod (\max(T_{SSB}, 10\text{ms})/10\text{ms}) = 0$ |
| RB numbers containing SSBs within channel BW | $(RB_J, RB_{J+1}, \dots, RB_{J+19})$ ^{Note 1} |
| Note 1: | RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. |
| Note 2: | These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves. |

A.3.10.2.4 SSB pattern 4 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz

Table A.3.10.2.4-1: SSB.4 FR2: SSB Pattern 4 for SSB SCS = 240 kHz in 100 MHz channel with 1 SSB per SS-burst

| SSB Parameters | Values |
|--|---|
| Channel bandwidth | 100 MHz |
| SSB SCS | 240 kHz |
| SSB periodicity (T_{SSB}) | 20 ms |
| Number of SSBs per SS-burst | 1 |
| SS/PBCH block index | 0 |
| Symbol numbers containing SSBs ^{Note 2} | 8-11 |
| Slot numbers containing SSB ^{Note 2} | 0 |
| SFN containing SSB | $SFN \bmod (\max(T_{SSB}, 10\text{ms})/10\text{ms}) = 0$ |
| RB numbers containing SSBs within channel BW | $(RB_J, RB_{J+1}, \dots, RB_{J+19})$ ^{Note 1} |
| Note 1: | RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. |
| Note 2: | These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves. |

A.3.10.2.5 SSB pattern 5 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz

Table A.3.10.2.5-1: SSB.5 FR2: SSB Pattern 5 for SSB SCS = 120 kHz in 100 MHz channel with 2 SSBs per SS-burst

| SSB Parameters | Values | |
|--|---|-----|
| Channel bandwidth | 100 MHz | |
| SSB SCS | 120 kHz | |
| SSB periodicity (T_{SSB}) | 20 ms | |
| Number of SSBs per SS-burst | 2 | |
| SS/PBCH block index | 2 | 3 |
| Symbol numbers containing SSBs ^{Note 2} | 2-5 | 6-9 |
| Slot numbers containing SSB ^{Note 2} | 1 | 1 |
| SFN containing SSB | SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0 | |
| RB numbers containing SSBs within channel BW | $(RB_J, RB_{J+1}, \dots, RB_{J+19})$ ^{Note 1} | |
| Note 1: | RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. | |
| Note 2: | These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves. | |

A.3.10.2.6 SSB pattern 6 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz

Table A.3.10.2.6-1: SSB.6 FR2: SSB Pattern 6 for SSB SCS = 240 kHz in 100 MHz channel with 2 SSBs per SS-burst

| SSB Parameters | Values | |
|--|---|-----|
| Channel bandwidth | 100 MHz | |
| SSB SCS | 240 kHz | |
| SSB periodicity (T_{SSB}) | 20 ms | |
| Number of SSBs per SS-burst | 2 | |
| SS/PBCH block index | 2 | 3 |
| Symbol numbers containing SSBs ^{Note 2} | 2-5 | 6-9 |
| Slot numbers containing SSB ^{Note 2} | 1 | 1 |
| SFN containing SSB | SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0 | |
| RB numbers containing SSBs within channel BW | $(RB_J, RB_{J+1}, \dots, RB_{J+19})$ ^{Note 1} | |
| Note 1: | RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. | |
| Note 2: | These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves. | |

A.3.10.2.7 SSB pattern 7 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz

Table A.3.10.2.7-1: SSB.7 FR2: SSB Pattern 7 for SSB SCS = 120 kHz in 100 MHz channel with 1 SSB per SS-burst

| SSB Parameters | Values |
|--|---|
| Channel bandwidth | 100 MHz |
| SSB SCS | 120 kHz |
| SSB periodicity (T_{SSB}) | 20 ms |
| Number of SSBs per SS-burst | 1 |
| SS/PBCH block index | 1 |
| Symbol numbers containing SSBs ^{Note 2} | 8-11 |
| Slot numbers containing SSB ^{Note 2} | 0 |
| SFN containing SSB | $SFN \bmod (\max(T_{SSB}, 10\text{ms})/10\text{ms}) = 0$ |
| RB numbers containing SSBs within channel BW | $(RB_J, RB_{J+1}, \dots, RB_{J+19})$ ^{Note 1} |
| Note 1: | RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. |
| Note 2: | These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves. |

A.3.10.2.8 SSB pattern 8 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz

Table A.3.10.2.8-1: SSB.8 FR2: SSB Pattern 8 for SSB SCS = 240 kHz in 100 MHz channel with 1 SSB per SS-burst

| SSB Parameters | Values |
|--|---|
| Channel bandwidth | 100 MHz |
| SSB SCS | 240 kHz |
| SSB periodicity (T_{SSB}) | 20 ms |
| Number of SSBs per SS-burst | 1 |
| SS/PBCH block index | 1 |
| Symbol numbers containing SSBs ^{Note 2} | 12-13 |
| Slot numbers containing SSB ^{Note 2} | 0 |
| SFN containing SSB | $SFN \bmod (\max(T_{SSB}, 10\text{ms})/10\text{ms}) = 0$ |
| RB numbers containing SSBs within channel BW | $(RB_J, RB_{J+1}, \dots, RB_{J+19})$ ^{Note 1} |
| Note 1: | RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. |
| Note 2: | These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves. |

A.3.11 SMTC Configurations

A.3.11.1 SMTC pattern 1: SMTC period = 20 ms with SMTC duration = 1 ms

Table A.3.11.1-1: SMTC.1: SMTC Pattern 1 for SMTC period = 20 ms and duration = 1 ms

| SMTC Parameters | Values |
|------------------|--------|
| SMTC periodicity | 20 ms |
| SMTC offset | 0 ms |
| SMTC duration | 1 ms |

A.3.11.2 SMTC pattern 2: SMTC period = 20 ms with SMTC duration = 5 ms

Table A.3.11.2-1: SMTC.2: SMTC Pattern 2 for SMTC period = 20 ms and duration = 5 ms

| SMTC Parameters | Values |
|------------------|--------|
| SMTC periodicity | 20 ms |
| SMTC offset | 0 ms |
| SMTC duration | 5 ms |

A.3.11.3 SMTC pattern 3: SMTC period = 160 ms with SMTC duration = 1 ms

Table A.3.11.3-1: SMTC.3: SMTC Pattern 3 for SMTC period = 160 ms and duration = 1 ms

| SMTC Parameters | Values |
|------------------|--------|
| SMTC periodicity | 160 ms |
| SMTC offset | 0 ms |
| SMTC duration | 1 ms |

A.3.11.4 SMTC pattern 4: SMTC period = 20 ms with SMTC duration = 1 ms

Table A.3.11.4-1: SMTC.4: SMTC Pattern 4 for SMTC period = 20 ms and duration = 1 ms

| SMTC Parameters | Values |
|------------------|--------|
| SMTC periodicity | 20 ms |
| SMTC offset | 10 ms |
| SMTC duration | 1 ms |

A.3.11.5 SMTC pattern 5: SMTC period = 20 ms with SMTC duration = 5 ms

Table A.3.11.4-1: SMTC.5: SMTC Pattern 5 for SMTC period = 20 ms and duration = 5 ms

| SMTC Parameters | Values |
|------------------|--------|
| SMTC periodicity | 20 ms |
| SMTC offset | 10 ms |
| SMTC duration | 5 ms |

A.3.12 Test Cases with Different CC Configurations

A.3.12.1 EN-DC Test Cases with Different EN-DC Configurations

A.3.12.1.1 Introduction

In Annex A EN-DC test cases may be defined for two component carriers (CCs) as well as for more than two CCs to verify the same RRM requirement.

A.3.12.1.2 Principle of testing

If multiple EN-DC test cases are defined for two CCs as well as for more than two CCs to verify the same type of RRM requirement, which depends on the number of CCs, then from the UE performance point of view the test coverage can be considered fulfilled by executing only the EN-DC test cases with the maximum number of CCs in EN-DC supported by the UE. Otherwise if the same type of RRM requirement is independent of the number of CCs then from the UE performance point of view the test coverage can be considered fulfilled by executing only the EN-DC test cases with two CCs in EN-DC supported by the UE.

Editor's: The maximum number of CCs that can be used in FR2 tests in EN-DC would depend on the test equipment capability.

A.3.12.2 Carrier Aggregation Test Cases with Different CA Configurations

A.3.12.2.1 Introduction

In Annex A carrier aggregation test cases may be defined for two CCs as well as for more than two CCs to verify the same RRM requirement.

A.3.12.2.2 Principle of testing

If multiple carrier aggregation test cases are defined for two CCs as well as for more than two CCs to verify the same RRM requirement, which depends on the number of CCs, then from the UE performance point of view the test coverage can be considered fulfilled by executing only the CA test cases with the maximum number of CCs in CA supported by the UE. Otherwise if the same type of RRM requirement is independent of the number of CCs then from the UE performance point of view the test coverage can be considered fulfilled by executing only the CA test cases with at least two CCs in CA supported by the UE.

Editor's: The maximum number of CCs that can be used in FR2 tests in CA would depend on the test equipment capability.

A.3.13 Test Cases in SA and EN-DC Operations

A.3.13.1 Introduction

This clause defines a principle which is applicable to test cases verifying RRM requirements in standalone (SA) or EN-DC operations.

In Annex A test cases may be defined in SA and EN-DC operations to verify the same RRM requirement.

Editor's note: this clause may need to define further for NE-DC and NR-DC test cases, which subjects to the test cases defined in the future.

A.3.13.2 Principle of Testing

If test cases are defined in both SA and EN-DC operations to verify the same RRM requirement then the UE capable of both SA and EN-DC operations needs to verify that RRM requirement by performing test case(s) in either SA operation or in EN-DC operation.

If test cases are defined in both SA and EN-DC operations to verify at least one common RRM requirement then the UE capable of both SA and EN-DC operations needs to verify RRM requirements by performing test case(s) in either SA operation or in EN-DC operation provided that the performed test case(s):

- verifies the largest number of RRM requirements and

- verifies at least all RRM requirements covered in the test case(s), which is not performed.

A.3.14 CSI-RS configurations

A.3.14.1 FDD

Table A.3.14.1-1: CSI-RS Reference Measurement Channels for SCS=15kHz

| | CSI-RS.1.1 FDD | CSI-RS.1.2 FDD | CSI-RS.1.3 FDD | CSI-RS.1.4 FDD |
|-----------------------------|-------------------|----------------------------|--------------------|--------------------|
| Resource Type | periodic | periodic | aperiodic | aperiodic |
| Resource Set Config | | | | |
| nzp-CSI-ResourceSetId | 0 | 0 | 0 | 0 |
| repetition | n.a. | off | off | on |
| aperiodicTriggeringOffset | n.a. | n.a. | 6 | 6 |
| trs-Info | n.a. | n.a. | n.a. | n.a. |
| Resource Config | | | | |
| nzp-CSI-RS-ResourceId | 0 for resource #0 | 10 for resource #0 | 20 for resource #0 | 30 for resource #0 |
| | | | | 31 for resource #1 |
| | | | | 32 for resource #2 |
| | | | | 33 for resource #3 |
| | | 11 for resource #1 | 21 for resource #1 | 34 for resource #4 |
| | | | | 35 for resource #5 |
| | | | | 36 for resource #6 |
| | | | | 37 for resource #7 |
| powerControlOffset | 0 | 0 | 0 | 0 |
| powerControlOffsetSS | db0 | db0 | db0 | db0 |
| scramblingID | 0 | 0 | 0 | 0 |
| Period (slots) | slot5 | slot10 | n.a. | n.a. |
| Offset | 1 | 1 | n.a. | n.a. |
| qcl-InfoPeriodicCSI-RS | TCl.State.0 | TCl.State.0 TCl.State.1 | n.a. | n.a. |
| frequencyDomainAllocation | 000001 | 000001 | 000001 | 000001 |
| nrofPorts | 2 | 1 | 1 | 1 |
| firstOFDMSymbolInTimeDomain | 5 for resource #0 | 6 for resource #0 | 6 for resource #0 | 0 for resource #0 |
| | | | | 1 for resource #1 |
| | | | | 2 for resource #2 |
| | | 10 for resource #1 | 10 for resource #1 | 3 for resource #3 |
| | | | | 4 for resource #4 |
| | | | | 5 for resource #5 |
| | | | | 6 for resource #6 |

| | | | | |
|--|--------------|--------------|--------------|-------------------|
| | | | | 7 for resource #7 |
| cdm-Type | FD-CDM2 | noCDM | noCDM | noCDM |
| density | 1 | 3 | 3 | 3 |
| startingRB | 0 | 0 | 0 | 0 |
| nrofRBs | 276 (Note 1) | 276 (Note 1) | 276 (Note 1) | 276 (Note 1) |
| Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP. | | | | |

A.3.14.2 TDD

Table A.3.14.2-1: CSI-RS Reference Measurement Channels for SCS=15kHz

| | CSI-RS.1.1 TDD | CSI-RS.1.2 TDD | CSI-RS.1.3 TDD | CSI-RS.1.4 TDD |
|-----------------------------|-------------------|----------------------------|--------------------|--------------------|
| Resource Type | periodic | periodic | aperiodic | aperiodic |
| Resource Set Config | | | | |
| nzp-CSI-ResourceSetId | 0 | 0 | 0 | 0 |
| repetition | n.a. | off | off | on |
| aperiodicTriggeringOffset | n.a. | n.a. | 6 | 6 |
| trs-Info | n.a. | n.a. | n.a. | n.a. |
| Resource Config | | | | |
| nzp-CSI-RS-ResourceId | 0 for resource #0 | 10 for resource #0 | 20 for resource #0 | 30 for resource #0 |
| | | | | 31 for resource #1 |
| | | | | 32 for resource #2 |
| | | | | 33 for resource #3 |
| | | 11 for resource #1 | 21 for resource #1 | 34 for resource #4 |
| | | | | 35 for resource #5 |
| | | | | 36 for resource #6 |
| | | | | 37 for resource #7 |
| powerControlOffset | 0 | 0 | 0 | 0 |
| powerControlOffsetSS | db0 | db0 | db0 | db0 |
| scramblingID | 0 | 0 | 0 | 0 |
| Period (slots) | slot5 | slot10 | n.a. | n.a. |
| Offset | 1 | 1 | n.a. | n.a. |
| qcl-InfoPeriodicCSI-RS | TCl.State.0 | TCl.State.0 TCl.State.1 | n.a. | n.a. |
| frequencyDomainAllocation | 000001 | 000001 | 000001 | 000001 |
| nrofPorts | 2 | 1 | 1 | 1 |
| firstOFDMsymbolInTimeDomain | 5 for resource #0 | 6 for resource #0 | 6 for resource #0 | 0 for resource #0 |
| | | | | 1 for resource #1 |
| | | 10 for resource #1 | 10 for resource #1 | 2 for resource #2 |
| | | | | 3 for resource #3 |
| | | | | 4 for resource #4 |

| | | | | |
|--|--------------|--------------|--------------|-------------------|
| | | | | 5 for resource #5 |
| | | | | 6 for resource #6 |
| | | | | 7 for resource #7 |
| cdm-Type | FD-CDM2 | noCDM | noCDM | noCDM |
| density | 1 | 3 | 3 | 3 |
| startingRB | 0 | 0 | 0 | 0 |
| nrofRBs | 276 (Note 1) | 276 (Note 1) | 276 (Note 1) | 276 (Note 1) |
| Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP. | | | | |

Table A.3.14.2-2: CSI-RS Reference Measurement Channels for SCS=30kHz

| | CSI-RS.2.1 TDD | CSI-RS.2.2 TDD | CSI-RS.2.3 TDD | CSI-RS.2.4 TDD |
|-----------------------------|-------------------|----------------------------|--------------------|--------------------|
| Resource Type | periodic | periodic | aperiodic | aperiodic |
| Resource Set Config | | | | |
| nzp-CSI-ResourceSetId | 0 | 0 | 0 | 0 |
| repetition | n.a. | off | off | on |
| aperiodicTriggeringOffset | n.a. | n.a. | 6 | 6 |
| trs-Info | n.a. | n.a. | n.a. | n.a. |
| Resource Config | | | | |
| nzp-CSI-RS-ResourceId | 0 for resource #0 | 10 for resource #0 | 20 for resource #0 | 30 for resource #0 |
| | | | | 31 for resource #1 |
| | | | | 32 for resource #2 |
| | | | | 33 for resource #3 |
| | | 11 for resource #1 | 21 for resource #1 | 34 for resource #4 |
| | | | | 35 for resource #5 |
| | | | | 36 for resource #6 |
| | | | | 37 for resource #7 |
| powerControlOffset | 0 | 0 | 0 | 0 |
| powerControlOffsetSS | db0 | db0 | db0 | db0 |
| scramblingID | 0 | 0 | 0 | 0 |
| Period (slots) | slot10 | slot20 | n.a. | n.a. |
| Offset | 2 | 2 | n.a. | n.a. |
| qcl-InfoPeriodicCSI-RS | TCI.State.0 | TCI.State.0 TCI.State.1 | n.a. | n.a. |
| frequencyDomainAllocation | 000001 | 000001 | 000001 | 000001 |
| nrofPorts | 2 | 1 | 1 | 1 |
| firstOFDMsymbolInTimeDomain | 5 for resource #0 | 6 for resource #0 | 6 for resource #0 | 0 for resource #0 |
| | | | | 1 for resource #1 |
| | | | | 2 for resource #2 |
| | | | | 3 for resource #3 |

| | | | | |
|--|--------------|--------------------|--------------------|-------------------|
| | | 10 for resource #1 | 10 for resource #1 | 4 for resource #4 |
| | | | | 5 for resource #5 |
| | | | | 6 for resource #6 |
| | | | | 7 for resource #7 |
| cdm-Type | FD-CDM2 | noCDM | noCDM | noCDM |
| density | 1 | 3 | 3 | 3 |
| startingRB | 0 | 0 | 0 | 0 |
| nrofRBs | 276 (Note 1) | 276 (Note 1) | 276 (Note 1) | 276 (Note 1) |
| Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP. | | | | |

Table A.3.14.2-3: CSI-RS Reference Measurement Channels for SCS=120kHz

| | CSI-RS.3.1 TDD | CSI-RS.3.2 TDD | CSI-RS.3.3 TDD | CSI-RS.3.4 TDD |
|-----------------------------|-------------------|----------------------------|--------------------|--------------------|
| Resource Type | periodic | periodic | aperiodic | aperiodic |
| Resource Set Config | | | | |
| nzp-CSI-ResourceSetId | 0 | 0 | 0 | 0 |
| repetition | n.a. | off | off | on |
| aperiodicTriggeringOffset | n.a. | n.a. | 6 | 6 |
| trs-Info | n.a. | n.a. | n.a. | n.a. |
| Resource Config | | | | |
| nzp-CSI-RS-ResourceId | 0 for resource #0 | 10 for resource #0 | 20 for resource #0 | 30 for resource #0 |
| | | | | 31 for resource #1 |
| | | | | 32 for resource #2 |
| | | | | 33 for resource #3 |
| | | 11 for resource #1 | 21 for resource #1 | 34 for resource #4 |
| | | | | 35 for resource #5 |
| | | | | 36 for resource #6 |
| | | | | 37 for resource #7 |
| powerControlOffset | 0 | 0 | 0 | 0 |
| powerControlOffsetSS | db0 | db0 | db0 | db0 |
| scramblingID | 0 | 0 | 0 | 0 |
| Period (slots) | slot40 | slot80 | n.a. | n.a. |
| Offset | 8 | 8 | n.a. | n.a. |
| qcl-InfoPeriodicCSI-RS | TCl.State.0 | TCl.State.0 TCl.State.1 | n.a. | n.a. |
| frequencyDomainAllocation | 000001 | 000001 | 000001 | 000001 |
| nrofPorts | 1 | 1 | 1 | 1 |
| firstOFDMsymbolInTimeDomain | 5 for resource #0 | 6 for resource #0 | 6 for resource #0 | 0 for resource #0 |
| | | | | 1 for resource #1 |
| | | | | 2 for resource #2 |

| | | | | |
|--|--------------|--------------------|--------------------|-------------------|
| | | | | 3 for resource #3 |
| | | | | 4 for resource #4 |
| | | 10 for resource #1 | 10 for resource #1 | 5 for resource #5 |
| | | | | 6 for resource #6 |
| | | | | 7 for resource #7 |
| cdm-Type | FD-CDM2 | noCDM | noCDM | noCDM |
| density | 1 | 3 | 3 | 3 |
| startingRB | 0 | 0 | 0 | 0 |
| nrofRBs | 276 (Note 1) | 276 (Note 1) | 276 (Note 1) | 276 (Note 1) |
| Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP. | | | | |

A.3.15 Angle of Arrival (AoA) for FR2 RRM test cases

This clause specifies the AoA setups for FR2 RRM test cases in clause A.5 and A.7. The applicable AoA setup is defined in each test case in clause A.5 and A.7.

A.3.15.1 Setup 1: Single AoA in Rx beam peak direction

There is only one active probe in the test. The DL signals, and noise if applicable, transmitted from the probe, are aligned to the UE Rx beam peak direction (as defined in TS 38.101-2 [19]).

A.3.15.2 Setup 2: Single AoA in non Rx beam peak direction

A.3.15.2.1 Setup 2a: Single AoA in non Rx beam peak direction without change in direction

There is only one active probe in the test. The DL signals, and noise if applicable, transmitted from the probe, align to a direction (AoA) which is from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [19] for each UE power class. The direction (AoA) of the signals shall not be changed between test iterations.

A.3.15.2.2 Setup 2b: Single AoA in non Rx beam peak direction with change in direction

There is only one active probe in the test. The DL signals, and noise if applicable, transmitted from the probe, align to a direction (AoA) which is from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [19] for each UE power class. For UE power class 3, the direction (AoA) of the signals shall be changed for each test iteration (for UE power classes other than 3, this is FFS).

A.3.15.3 Setup 3: 2 AoAs

There are 2 active probes in the test. The DL signals, and noise if applicable, transmitted from the two active probes, align to directions (AoAs) which are from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [19] for each UE power class. The relative angular offset between the directions (AoAs) of the 2 active probes, shall be changed for each test iteration. The applicable set of relative angular offsets between the 2 active probes is given in Table 3.15.3-1 for each UE power class.

Editor Note: If RAN5 finds the changing of angular offset between the directions (AoAs) of the 2 active probes per test iteration to be infeasible from the perspectives of EIS spherical coverage and other impacts, e.g.: testing time, then the test setup will be revised.

Table 3.15.3-1: Set of relative angular offsets between active probes for each power class

| UE Power class | Relative angular offset between active probes |
|----------------|---|
| 1 | FFS |
| 2 | FFS |
| 3 | 30°, 60°, 90°, 120° and 150° |
| 4 | FFS |

A.3.15.4 Setup 4: 2 AoAs, 1 AoA in Rx beam peak direction, 1 in non Rx beam peak

A.3.15.4.1 Setup 4a: 2 AoAs, 1 AoA in Rx beam peak direction, 1 in non Rx beam peak without change in direction

There are 2 active probes in the test. The DL signals, and noise if applicable, are transmitted from the two active probes. One probe is aligned to the UE Rx beam peak direction as defined in TS 38.101-2 [19]. The second is aligned to a direction (AoA) which is from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [19] for each UE power class. The direction (AoA) of the non Rx beam peak signal shall not be changed between test iterations.

A.3.15.4.2 Setup 4b: 2 AoAs, 1 AoA in Rx beam peak direction, 1 in non Rx beam peak with change in direction

There are 2 active probes in the test. The DL signals, and noise if applicable, are transmitted from the two active probes. One probe is aligned to the UE Rx beam peak direction as defined in TS 38.101-2 [19]. The second is aligned to a direction (AoA) which is from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [19] for each UE power class.

For UE power class 3, the relative angular offset between the directions (AoAs) of the 2 active probes shall be changed for each test iteration, within the probe alignment described above. The applicable set of relative angular offsets between the 2 active probes is given in Table 3.15.3-1 for each UE power class.

A.3.16 TCI State Configuration

A.3.16.1 Introduction

This clause provides the configurations for TCI states towards either SSB or CSI-RS. The TCI states defined in this clause are configured in each test when applicable to indicate that certain DL signals are QCL'ed with the referenceSignal configured in the TCI states.

A.3.16.2 TCI states

Table A.3.16.2-1: TCI States

| Parameter | TCI.State.0 | TCI.State.1 | TCI.State.2 | TCI.State.3 |
|--|-------------|-------------|--|--|
| tcid-StateId | Id0 | Id1 | Id2 | Id3 |
| qcl-Type1 | typeC | typeC | typeA | typeA |
| qcl-Type2 ^{Note1} | typeD | typeD | typeD | typeD |
| referenceSignal | SSB0 | SSB1 | Resource #4 in TRS resource set 1 ^{Note3} | Resource #4 in TRS resource set 2 ^{Note3} |
| Note 1: qcl-Type2 of typeD only where applicable. For RRM test cases, this will be only in FR2 Note 2: referenceSignal configurations towards which the TCI states are configured are defined in a test-specific manner. Note 3: Reference TRS resource sets are defined in A.3.17, and the applicable TRS resource set(s) are specified in each test case. When a single TRS resource set is configured in a test case, it is considered as resource set 1. | | | | |

Table A.3.16.2-2: Void

A.3.17 Configurations of CSI-RS for tracking

A.3.17.1 Configuration of CSI-RS for tracking for FR1

A.3.17.1.1 FDD

Table A.3.17.1.1-1: CSI-RS for tracking for SCS=15kHz

| Parameter | Unit | Value |
|---|-------|--|
| Reference channel | | TRS.1.1 FDD |
| Bandwidth | | BW of Active BWP ^{Note 1} |
| SCS | kHz | 15 |
| First subcarrier index in the PRB used for CSI-RS | | $k_0=0$ for CSI-RS resource 1,2,3,4 |
| First OFDM symbol in the slot used for CSI-RS | | $l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4 |
| Number of CSI-RS ports (X) | | 1 for CSI-RS resource 1,2,3,4 |
| CDM Type | | 'No CDM' for CSI-RS resource 1,2,3,4 |
| Density (ρ) | | 3 for CSI-RS resource 1,2,3,4 |
| CSI-RS periodicity | slots | 20 for CSI-RS resource 1,2,3,4 |
| CSI-RS offset | slots | 10 for CSI-RS resource 1 and 2 11 for CSI-RS resource 3 and 4 |
| EPRE ratio to SSS | dB | -3 ^{Note 2} |
| TCI state | | TCI.State.0 |
| Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases Note 2: Unless otherwise specified in the test case | | |

Table A.3.17.1.1-2: CSI-RS for tracking for SCS=30kHz

| Parameter | Unit | Value |
|--|-------|--|
| Reference channel | | TRS.1.2 FDD |
| Bandwidth | | BW of Active BWP ^{Note 1} |
| SCS | kHz | 30 |
| First subcarrier index in the PRB used for CSI-RS | | $k_0=0$ for CSI-RS resource 1,2,3,4 |
| First OFDM symbol in the slot used for CSI-RS | | $l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4 |
| Number of CSI-RS ports (X) | | 1 for CSI-RS resource 1,2,3,4 |
| CDM Type | | 'No CDM' for CSI-RS resource 1,2,3,4 |
| Density (ρ) | | 3 for CSI-RS resource 1,2,3,4 |
| CSI-RS periodicity | slots | 40 for CSI-RS resource 1,2,3,4 |
| CSI-RS offset | slots | 20 for CSI-RS resource 1 and 2 21 for CSI-RS resource 3 and 4 |
| EPRE ratio to SSS | dB | -3 ^{Note 2} |
| TCI state | | TCI.State.0 |
| Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases | | |
| Note 2: Unless otherwise specified in the test case | | |

A.3.17.1.2 TDD

Table A.3.17.1.2-1: CSI-RS for tracking for SCS=15kHz

| Parameter | Unit | Value |
|--|-------|--|
| Reference channel | | TRS.1.1 TDD |
| Bandwidth | | BW of Active BWP ^{Note 1} |
| SCS | kHz | 15 |
| First subcarrier index in the PRB used for CSI-RS | | $k_0=0$ for CSI-RS resource 1,2,3,4 |
| First OFDM symbol in the slot used for CSI-RS | | $l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4 |
| Number of CSI-RS ports (X) | | 1 for CSI-RS resource 1,2,3,4 |
| CDM Type | | 'No CDM' for CSI-RS resource 1,2,3,4 |
| Density (ρ) | | 3 for CSI-RS resource 1,2,3,4 |
| CSI-RS periodicity | slots | 20 for CSI-RS resource 1,2,3,4 |
| CSI-RS offset | slots | 10 for CSI-RS resource 1 and 2 11 for CSI-RS resource 3 and 4 |
| EPRE ratio to SSS | dB | -3 ^{Note 2} |
| TCI state | | TCI.State.0 |
| Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases | | |
| Note 2: Unless otherwise specified in the test case | | |

Table A.3.17.1.2-2: CSI-RS for tracking for SCS=30kHz

| Parameter | Unit | Value |
|--|-------|--|
| Reference channel | | TRS.1.2 TDD |
| Bandwidth | | BW of Active BWP ^{Note 1} |
| SCS | kHz | 30 |
| First subcarrier index in the PRB used for CSI-RS | | $k_0=0$ for CSI-RS resource 1,2,3,4 |
| First OFDM symbol in the slot used for CSI-RS | | $l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4 |
| Number of CSI-RS ports (X) | | 1 for CSI-RS resource 1,2,3,4 |
| CDM Type | | 'No CDM' for CSI-RS resource 1,2,3,4 |
| Density (ρ) | | 3 for CSI-RS resource 1,2,3,4 |
| CSI-RS periodicity | slots | 40 for CSI-RS resource 1,2,3,4 |
| CSI-RS offset | slots | 20 for CSI-RS resource 1 and 2 21 for CSI-RS resource 3 and 4 |
| EPRE ratio to SSS | dB | -3 ^{Note 2} |
| TCI state | | TCI.State.0 |
| Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases | | |
| Note 2: Unless otherwise specified in the test case | | |

A.3.17.2 Configuration of CSI-RS for tracking for FR2

A.3.17.2.1 TDD

Table A.3.17.2.1-1: CSI-RS for tracking for SCS=120kHz Set 1

| Parameter | Unit | Value |
|--|-------|--|
| Reference channel | | TRS.2.1 TDD |
| Bandwidth | | BW of Active BWP ^{Note 1} |
| SCS | kHz | 120 |
| First subcarrier index in the PRB used for CSI-RS | | $k_0=0$ for CSI-RS resource 1,2,3,4 |
| First OFDM symbol in the slot used for CSI-RS | | $l_0 = 1$ for CSI-RS resource 1 and 3 $l_0 = 5$ for CSI-RS resource 2 and 4 |
| Number of CSI-RS ports (X) | | 1 for CSI-RS resource 1,2,3,4 |
| CDM Type | | 'No CDM' for CSI-RS resource 1,2,3,4 |
| Density (ρ) | | 3 for CSI-RS resource 1,2,3,4 |
| CSI-RS periodicity | slots | 80 for CSI-RS resource 1,2,3,4 |
| CSI-RS offset | slots | 40 for CSI-RS resource 1 and 2 41 for CSI-RS resource 3 and 4 |
| EPRE ratio to SSS | dB | -3 ^{Note 2} |
| TCI state | | TCI.State.0 |
| Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases | | |
| Note 2: Unless otherwise specified in the test case | | |

Table A.3.17.2.1-2: CSI-RS for tracking for SCS=120kHz Set 2

| Parameter | Unit | Value |
|--|-------|--|
| Reference channel | | TRS.2.2 TDD |
| Bandwidth | | BW of Active BWP ^{Note 1} |
| SCS | kHz | 120 |
| First subcarrier index in the PRB used for CSI-RS | | $k_0=0$ for CSI-RS resource 1,2,3,4 |
| First OFDM symbol in the slot used for CSI-RS | | $l_0 = 2$ for CSI-RS resource 1 and 3 $l_0 = 6$ for CSI-RS resource 2 and 4 |
| Number of CSI-RS ports (X) | | 1 for CSI-RS resource 1,2,3,4 |
| CDM Type | | 'No CDM' for CSI-RS resource 1,2,3,4 |
| Density (ρ) | | 3 for CSI-RS resource 1,2,3,4 |
| CSI-RS periodicity | slots | 80 for CSI-RS resource 1,2,3,4 |
| CSI-RS offset | slots | 40 for CSI-RS resource 1 and 2 41 for CSI-RS resource 3 and 4 |
| EPRE ratio to SSS | dB | -3 ^{Note 2} |
| TCI state | | TCI.State.1 |
| Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases | | |
| Note 2: Unless otherwise specified in the test case | | |

A.3.18 Additional definitions related to OTA testing for FR2 RRM test cases

A.3.18.1 Introduction

FR2 RRM test cases are performed over the air (OTA). This clause provides additional definitions and clarifications on the OTA measurements and metrics defined or referred in the test cases.

A.3.18.2 PRACH Power Measurement

PRACH power is measured as EIRP(Link=Link angle, Meas=Link angle) as defined in clause 3.1 of TS 38.101-2 [19].

A.4 EN-DC tests with all NR cells in FR1

A.4.1 Void

A.4.2 Void

A.4.3 RRC_CONNECTED state mobility

A.4.3.1 Void

A.4.3.2 RRC Connection Mobility Control

A.4.3.2.1 Void

A.4.3.2.2 Random Access

A.4.3.2.2.1 Contention based random access test in FR1 for PSCell in EN-DC

A.4.3.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in clause 6.2.2.2 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7.2.1 and Cell 2 configured as PSCell in FR1. Supported test parameters are shown in Table A.4.3.2.2.1.1-1. UE capable of EN-DC with PSCell in FR1 needs to be tested by using the parameters in Table A.4.3.2.2.1.1-2.

Table A.4.3.2.2.1.1-1: Supported test configurations for contention based random access test in FR1 for PSCell in EN-DC

| Config | Description |
|--------|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations depending on UE capability |

Table A.4.3.2.2.1.1-2: General test parameters for contention based random access test in FR1 for PSCell in EN-DC

| Parameter | Unit | Test-1 | Comments |
|------------------------|------------|----------------------|----------------------|
| SSB Configuration | Config 1,2 | SSB pattern 3 in FR1 | As defined in A.3.10 |
| | Config 3,4 | SSB pattern 4 in FR1 | |
| Duplex Mode for Cell 2 | Config 1,2 | FDD | |

| | | | | | |
|--|----------------------|------------|---------------------------|--|--|
| | Config 3,4 | | TDD | | |
| TDD Configuration | Config 3,4 | | TDDConf.2.1 | | |
| OCNG Pattern ^{Note 1} | | | OCNG pattern 1 | As defined in A.3.2.1. | |
| PDSCH parameters ^{Note 4} | Config 1,2 | | SR.1.1 FDD | As defined in A.3.1.1. | |
| | Config 3,4 | | SR.2.1 TDD | | |
| NR RF Channel Number | | | 1 | | |
| EPRE ratio of PSS to SSS | | dB | 0 | | |
| EPRE ratio of PBCH_DMRS to SSS | | dB | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | dB | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | dB | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | dB | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | dB | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | dB | | | |
| SSB with index 0 | \hat{E}_s / I_{ot} | | dB | 3 | Power of SSB with index 0 is set to be above configured <i>rsrp-ThresholdSSB</i> |
| | N_{oc} | Config 1,2 | dBm/15kHz | -98 | |
| | | Config 3,4 | | -101 | |
| | \hat{E}_s / N_{oc} | | dB | 3 | |
| SS-RSRP ^{Note 3} | | dBm/ SCS | -95 | | |
| SSB with index 1 | \hat{E}_s / I_{ot} | | dB | -17 | Power of SSB with index 1 is set to be below configured <i>rsrp-ThresholdSSB</i> |
| | N_{oc} | Config 1,2 | dBm/15kHz | -98 | |
| | | Config 3,4 | | -101 | |
| | \hat{E}_s / N_{oc} | | dB | -17 | |
| SS-RSRP ^{Note 3} | | dBm/ SCS | -115 | | |
| I_o ^{Note 2} | Config 1,2 | dBm | -65.3/9.36MHz | For symbols without SSB index 1 | |
| | Config 3,4 | | -62.2/38.16MHz | | |
| ss-PBCH-BlockPower | | dBm/ SCS | -5 | As defined in clause 6.3.2 in TS 38.331 [2]. | |
| Configured UE transmitted power ($P_{CMAX, f,c}$) | | dBm | 23 | As defined in clause 6.2.4 in TS 38.101-1. | |
| PRACH Configuration | | | FR1 PRACH configuration 1 | As defined in A.3.8.2. | |
| Propagation Condition | | - | AWGN | | |
| <p>Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.</p> <p>Note 2: SS-RSRP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purpose. They are not settable parameters.</p> <p>Note 3: Void</p> <p>Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.</p> | | | | | |

A.4.3.2.2.1.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.4.3.2.2.1.2.1 Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2.2.2.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *rsrp-ThresholdSSB*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.1.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.1.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.1.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.1.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.1.2.4 Receiving an UL grant for msg3 retransmission

To test the UE behavior specified in clause 6.2.2.2.1.4, the System Simulator shall provide an UL grant for msg3 retransmission following a successful Random Access Response.

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission..

A.4.3.2.2.1.2.5 void

A.4.3.2.2.1.2.6 void

A.4.3.2.2.1.2.7 Contention Resolution Timer expiry

To test the UE behavior specified in Clause 6.2.2.2.1.6 the System Simulator shall *not* send a response to a msg3.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

A.4.3.2.2.2 Non-contention based random access test in FR1 for PSCell in EN-DC

A.4.3.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in clause 6.2.2.2 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7.2.1 and Cell 2 configured as PSCell in FR1. Supported test parameters are shown in Table A.4.3.2.2.2.1-1. UE capable of EN-DC with PSCell in FR1 needs to be tested by using the parameters in Table A.4.3.2.2.2.1-2 for SSB-based non-contention based random access test (Test 1) and CSI-RS-based non-contention based random access test (Test 2). Test 2 is only applicable to UE which supports csi-RSRP-AndRSRQ-MeasWithSSB or csi-RSRP-AndRSRQ-MeasWithoutSSB.

Table A.4.3.2.2.2.1-1: Supported test configurations for non-contention based random access test in FR1 for PSCell in EN-DC

| Config | Description |
|--------|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations depending on UE capability |

Table A.4.3.2.2.2.1-2: General test parameters for non-contention based random access test in FR1 for PSCell in EN-DC

| Parameter | Unit | Test-1 | Test-2 | Comments |
|-----------|------|--------|--------|----------|
|-----------|------|--------|--------|----------|

| | | | | | |
|--|----------------------|------------|---------------------------|---------------------------|--|
| SSB Configuration | Config 1,2 | | SSB pattern 3 in FR1 | SSB pattern 3 in FR1 | As defined in A.3.10 |
| | Config 3,4 | | SSB pattern 4 in FR1 | SSB pattern 4 in FR1 | |
| CSI-RS Configuration | Config 1,2 | | N/A | CSI-RS.1.1 FDD | As defined in A.3.1.4 |
| | Config 3,4 | | | CSI-RS.2.1 TDD | |
| Duplex Mode for Cell 2 | Config 1,2 | | FDD | FDD | |
| | Config 3,4 | | TDD | TDD | |
| TDD Configuration | Config 3,4 | | TDDConf.2.1 | TDDConf.2.1 | |
| OCNG Pattern ^{Note 1} | | | OCNG pattern 1 | OCNG pattern 1 | As defined in A.3.2.1. |
| PDSCH parameters ^{Note 4} | Config 1,2 | | SR.1.1 FDD | SR.1.1 FDD | As defined in A.3.1.1. |
| | Config 3,4 | | SR.2.1 TDD | SR.2.1 TDD | |
| NR RF Channel Number | | | 1 | 1 | |
| EPRE ratio of PSS to SSS | | dB | 0 | 0 | |
| EPRE ratio of PBCH_DMRS to SSS | | dB | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | dB | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | dB | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | dB | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | dB | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | dB | | | |
| SSB with index 0 | \hat{E}_s / I_{ot} | | | | |
| | N_{oc} | Config 1,2 | dBm/15kHz | -98 | |
| | | Config 3,4 | | -101 | |
| | \hat{E}_s / N_{oc} | | dB | 3 | 3 |
| SS-RSRP ^{Note 3} | | dBm/ SCS | -95 | -95 | |
| SSB with index 1 | \hat{E}_s / I_{ot} | | dB | -17 | Power of SSB with index 1 is set to be below configured <i>rsrp-ThresholdSSB</i> |
| | N_{oc} | Config 1,2 | dBm/15kHz | -98 | |
| | | Config 3,4 | | -101 | |
| | \hat{E}_s / N_{oc} | | dB | -17 | |
| SS-RSRP ^{Note 3} | | dBm/ SCS | -115 | -115 | |
| I_0 ^{Note 2} | Config 1,2 | dBm | -65.3/9.36MHz | -65.3/9.36MHz | For symbols without SSB index 1 |
| | Config 3,4 | | -62.2/38.16MHz | -62.2/38.16MHz | |
| ss-PBCH-BlockPower | | dBm/ SCS | -5 | -5 | As defined in clause 6.3.2 in TS 38.331 [2]. |
| Configured UE transmitted power ($P_{CMAX, f,c}$) | | dBm | 23 | 23 | As defined in clause 6.2.4 in TS 38.101-1. |
| PRACH Configuration | | | FR1 PRACH configuration 2 | FR1 PRACH configuration 3 | As defined in A.3.8.2. |
| Propagation Condition | | - | AWGN | AWGN | |
| <p>Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.</p> <p>Note 2: SS-RSRP, E_s/I_{ot} and I_0 levels have been derived from other parameters for information purpose. They are not settable parameters.</p> <p>Note 3: Void</p> <p>Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.</p> | | | | | |

A.4.3.2.2.2.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.4.3.2.2.2.2.1 SSB-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.2.2.1 for SSB-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.2.2.2 CSI-RS-based Random Access Preamble Transmission

In Test-2, to test the UE behavior specified in Clause 6.2.2.2.2.1 for CSI-RS-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the CSI-RS configured.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-OccasionList*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.2.2.3 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.2.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.2.4 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.3 Void

A.4.4 Timing

A.4.4.1 UE transmit timing

A.4.4.1.1 NR UE Transmit Timing Test for FR1

A.4.4.1.1.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeB and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1.2. Supported test configurations are shown in Table 4.4.1.1.1-1.

Table A.4.4.1.1.1-1: Supported test configurations for FR1 PSCell

| Configuration | Description |
|---------------|--|
| 1 | LTE FDD, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz |
| 2 | LTE FDD, NR TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz |
| 3 | LTE FDD, NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz |
| 4 | LTE TDD, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz |
| 5 | LTE TDD, NR TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz |
| 6 | LTE TDD, NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz |
| Note: | The UE is only required to be tested in one of the supported test configurations |

The test consists of E-UTRA PCell and NR PSCell. The configuration for E-UTRA is given in A.3.7.2.1. Table A.4.4.1.1.1-2 defines the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.4.4.1.1.1-3.

Table A.4.4.1.1.1-2: Cell Specific Test Parameters for UL Transmit Timing test

| Parameter | Unit | Config | Test1 | Test2 | Band Group |
|-------------------------------------|------|-------------|-----------------------------|------------------------|------------|
| SSB ARFCN | | 1,2,3,4,5,6 | Freq1 | Freq1 | |
| Duplex Mode | | 1,4 | FDD | | |
| | | 2,3,5,6 | TDD | | |
| TDD configuration | | 1,4 | Not Applicable | | |
| | | 2,5 | TDDConf.1.1 | | |
| | | 3,6 | TDDConf.1.2 | | |
| BW _{channel} | MHz | 1,4 | 10: N _{RB,c} = 52 | | |
| | | 2,5 | 10: N _{RB,c} = 52 | | |
| | | 3,6 | 40: N _{RB,c} = 106 | | |
| Initial BWP Configuration | | 1,2,3,4,5,6 | DLBWP.0.1 ULBWP.0.1 | | |
| Dedicated BWP Configuration | | 1,2,3,4,5,6 | DLBWP.1.1 ULBWP.1.1 | | |
| DRx Cycle | ms | 1,2,3,4,5,6 | N/A | DRX.8 ^{Note5} | |
| PDSCH Reference measurement channel | | 1,4 | SR.1.1 FDD | | |
| | | 2,5 | SR.1.1 TDD | | |
| | | 3,6 | SR.2.1 TDD | | |
| CORESET Reference Channel | | 1,4 | CR.1.1 FDD | | |
| | | 2,5 | CR.1.1 TDD | | |
| | | 3,6 | CR.2.1 TDD | | |
| OCNG Patterns | | 1,2,3,4,5,6 | OCNG pattern 1 | | |
| SSB configuration | | 1,4 | SSB.1 FR1 | | |
| | | 2,5 | SSB.1 FR1 | | |
| | | 3,6 | SSB.2 FR1 | | |
| SMTc configuration | | 1,2,3,4,5,6 | SMTc.2 | | |
| TRS configuration | | 1,4 | TRS.1.1 FDD | | |
| | | 2,5 | TRS.1.1 TDD | | |
| | | 3,6 | TRS.1.2 TDD | | |
| PDSCH/PDCCH subcarrier spacing | kHz | 1,2,4,5 | 15 | | |
| | | 3,6 | 30 | | |

| | | | | | |
|---|-------------|-------------|-----------------------------|-----------------------------|--|
| EPRE ratio of PSS to SSS | dB | 1,2,3,4,5,6 | 0 | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | |
| N_{oc} ^{Note2} | dBm/15 kHz | 1,2,3,4,5,6 | -98 | -98 | |
| N_{oc} ^{Note2} | dBm/SCS | 1,2,4,5 | -98 | -98 | |
| | | 3,6 | -95 | -95 | |
| \hat{E}_s/I_{ot} | | 1,2,3,4,5,6 | 3 | 3 | |
| \hat{E}_s/N_{oc} | | 1,2,3,4,5,6 | 3 | 3 | |
| SS-RSRP ^{Note3} | dBm/SCS | 1,2,4,5 | -95 | -95 | |
| | | 3,6 | -92 | -92 | |
| Io ^{Note3} | dBm/9.36MHz | 1,2,4,5 | -65.2 | -65.2 | |
| | dBm/38.1MHz | 3,6 | -59.2 | -59.2 | |
| Propagation condition | | 1,2,3,4,5,6 | AWGN | | |
| SRS Config | | 1,2,4,5 | SRSCConf.1 ^{Note6} | SRSCConf.3 ^{Note6} | |
| | | 3, 6 | SRSCConf.1 ^{Note6} | SRSCConf.2 ^{Note6} | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 5: DRx related parameters are given in Table A.3.3.8-1</p> <p>Note 6: SRS configs are given in Table A.4.4.1.1.1-3</p> | | | | | |

Table A.4.4.1.1-3: SRS Configuration for Timing Accuracy Test

| | Field | SRSCConf.1 | SRSCConf.2 | SRSCConf.3 | Comments |
|-----------------|--------------------|------------|------------|------------|----------|
| SRS-ResourceSet | srs-ResourceSetId | 0 | 0 | 0 | |
| | srs-ResourceIdList | 0 | 0 | 0 | |
| | resourceType | Periodic | Periodic | Periodic | |
| | Usage | Codebook | Codebook | Codebook | |
| SRS-Resource | SRS-ResourceId | 0 | 0 | 0 | |
| | nrofSRS-Ports | Port1 | Port1 | Port1 | |
| | transmissionComb | n2 | n2 | n2 | |
| | combOffset-n2 | 0 | 0 | 0 | |
| | cyclicShift-n2 | 0 | 0 | 0 | |

| | | | | |
|----------------------------------|--|----------|----------|--------------------------------------|
| resourceMapping startPosition | 0 | 0 | 0 | |
| resourceMapping nrofSymbols | n1 | n1 | n1 | |
| resourceMapping repetitionFactor | n1 | n1 | n1 | |
| freqDomainPosition | 0 | 0 | 0 | |
| freqDomainShift | 0 | 0 | 0 | |
| freqHopping c-SRS | 14 for test configuration 1,2,4,5 25 for test configuration 3,6 | 25 | 14 | Matches $N_{RB,c}$ |
| freqHopping b-SRS | 0 | 0 | 0 | |
| freqHopping b-hop | 0 | 0 | 0 | |
| groupOrSequenceHopping | Neither | Neither | Neither | |
| resourceType | Periodic | Periodic | Periodic | |
| periodicityAndOffset-p | sl1, 0 | sl640, 5 | sl320, 3 | Offset to align with DRX periodicity |
| sequenceId | 0 | 0 | 0 | Any 10 bit number |

A.4.4.1.1.2 Test requirements

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test

- 1) Set up E-UTRA PCell according to parameters given in Table A.3.7.2.1-1 and setup NR PSCell according to parameters given in Table A.4.4.1.1.1-1.
- 2) After connection set up with the cell, the test equipment will verify that the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB.
 - a. The N_{TA} offset value (in T_c units) is 25600
 - b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 7.1.2-1
- 3) The test system shall adjust the timing of the DL path by values given in Table A.4.4.1.1.2-1

Table A.4.4.1.1.2-1: Adjustment Value for DL Timing

| SCS of SSB signals (kHz) | Adjustment Value | |
|--------------------------|---------------------|---------------------|
| | Test1 | Test2 |
| 15 | $+64 \times 64 T_c$ | $+32 \times 64 T_c$ |
| 30 | $+32 \times 64 T_c$ | $+16 \times 64 T_c$ |

- 4) The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in Clause 7.1.2 Table 7.1.2-3 until the UE transmit timing offset is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ respective to the first detected path (in time) of DL SSB. Skip this step for test 2 with DRX configured.

- 5) The test system shall verify that the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment.

A.4.4.2 UE timer accuracy

A.4.4.3 Timing advance

A.4.4.3.1 EN-DC FR1 timing advance adjustment accuracy

A.4.4.3.1.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3.

A.4.4.3.1.2 Test Parameters

Supported test configurations are shown in table A.4.4.3.1.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.4.4.3.1.2-2, A.4.4.3.1.2-3 and A.4.4.3.1.2-4. The configuration of Cell 1 (LTE PCell) is specified in clause A.3.7.2.1.

In all test cases, two cells are used. Cell 1 is the PCell in the primary Timing Advance Group (pTAG) and cell 2 is the PSCell in the secondary Timing Advance Group (sTAG). Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands for sTAG are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.4.4.3.1.2-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured for PSCell in sTAG.

During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element for sTAG, as specified in clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31, which according to clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance for sTAG used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements for sTAG, with Timing Advance Command value specified in table A.4.4.3.1.2-2. This value shall result in changes of the timing advance for sTAG used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in clause 7.3.2.1, the UE adjusts its uplink timing at slot $n+k$ for a timing advance command received in slot n . This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in clause 5.2 in TS 38.321, shall be configured so that it does not expire in the duration of the test.

Table A.4.4.3.1.2-1: Timing advance supported test configurations

| Config | Description |
|--------|--|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.4.4.3.1.2-2: General test parameters for timing advance

| Parameter | Unit | Value | Comment |
|--|------|------------------------|--|
| RF channel number | | Cell 1: 1 Cell 2: 2 | 1 for E-UTRAN PCell 2 for NR PSCell |
| Initial DL BWP | | DLBWP.0.1 | As specified in Table A.3.9.2.1-1 |
| Dedicated DL BWP | | DLBWP.1.1 | As specified in Table A.3.9.2.2-1 |
| Initial UL BWP | | ULBWP.0.1 | As specified in Table A.3.9.3.1-1 |
| Dedicated UL BWP | | ULBWP.1.1 | As specified in Table A.3.9.3.2-1 |
| Timing Advance Command (T_A) value during T1 | | 31 | $N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2 |
| Timing Advance Command (T_A) value during T2 | | 39 | For 15 kHz SCS $N_{TA_new} = N_{TA_old} + 8192 * T_c$ For 30 kHz SCS $N_{TA_new} = N_{TA_old} + 4096 * T_c$ (based on equation in clause 4.2 of TS 38.213 [3]) |
| T1 | s | 5 | |
| T2 | s | 5 | |

Table A.4.4.3.1.2-3: Cell specific test parameters for timing advance

| Parameter | | Unit | Test1 | |
|-------------------------------------|----------------|------|----------------------|----|
| | | | T1 | T2 |
| Duplex mode | Config 1,4 | | FDD | |
| | Config 2,3,5,6 | | TDD | |
| TDD configuration | Config 1,4 | | Not Applicable | |
| | Config 2,5 | | TDDConf.1.1 | |
| | Config 3,6 | | TDDConf.2.1 | |
| $BW_{channel}$ | Config 1,4 | MHz | 10: $N_{RB,c} = 52$ | |
| | Config 2,5 | | 10: $N_{RB,c} = 52$ | |
| | Config 3,6 | | 40: $N_{RB,c} = 106$ | |
| BWP BW | Config 1,4 | MHz | 10: $N_{RB,c} = 52$ | |
| | Config 2,5 | | 10: $N_{RB,c} = 52$ | |
| | Config 3,6 | | 40: $N_{RB,c} = 106$ | |
| DRx Cycle | | ms | Not Applicable | |
| PDSCH Reference measurement channel | Config 1,4 | | SR.1.1 FDD | |
| | Config 2,5 | | SR.1.1 TDD | |
| | Config 3,6 | | SR2.1 TDD | |
| CORESET Reference Channel | Config 1,4 | | CR.1.1 FDD | |
| | Config 2,5 | | CR.1.1 TDD | |

| | | | |
|---|----------------|--------------|----------------|
| | Config 3,6 | | CR2.1 TDD |
| TRS configuration | Config 1,4 | | TRS.1.1 FDD |
| | Config 2,5 | | TRS.1.1 TDD |
| | Config 3,6 | | TRS.1.2 TDD |
| | | | |
| OCNG Patterns | | | OCNG pattern 1 |
| SSB Configuration | Config 1,2,4,5 | | SSB.1 FR1 |
| | Config 3,6 | | SSB.2 FR1 |
| SMTC configuration | Config 1,2,4,5 | | SMTC.1 FR1 |
| | Config 3,6 | | SMTC.2 FR1 |
| PDSCH/PDCCH subcarrier spacing | Config 1,2,4,5 | kHz | 15 kHz |
| | Config 3,6 | | 30 kHz |
| PUCCH/PUSCH subcarrier spacing | Config 1,2,4,5 | kHz | 15 kHz |
| | Config 3,6 | | 30 kHz |
| EPRE ratio of PSS to SSS | | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | |
| N_{oc}^{Note2} | | | |
| N_{oc}^{Note2} | Config 1,2,4,5 | dBm/SCS | -98 |
| | Config 3,6 | | -95 |
| \hat{E}_s / I_{ot} | | dB | 3 |
| \hat{E}_s / N_{oc} | | dB | 3 |
| I_o^{Note3} | Config 1,2,4,5 | dBm/9.36MHz | -67.57 |
| | Config 3,6 | dBm/38.16MHz | -62.58 |
| Propagation condition | | - | AWGN |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | |

Table A.4.4.3.1.2-4: Sounding Reference Symbol Configuration for timing advance

| Field | | Value | Comment |
|-------|----------------|-------|-------------------------------|
| c-SRS | Config 1,2,4,5 | 12 | Frequency hopping is disabled |
| | Config 3,6 | 24 | |

| | | |
|--|-------------|---|
| b-SRS | 0 | |
| b-hop | 0 | |
| freqDomainPosition | 0 | Frequency domain position of SRS |
| freqDomainShift | 0 | |
| groupOrSequenceHopping | neither | No group or sequence hopping |
| SRS-PeriodicityAndOffset | sl5=0 | Once every 5 slots |
| pathlossReferenceRS | ssb-Index=0 | SSB #0 is used for SRS path loss estimation |
| usage | Codebook | Codebook based UL transmission |
| startPosition | 0 | resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition. |
| nrofSymbols | n1 | |
| repetitionFactor | n1 | |
| combOffset-n2 | 0 | transmissionComb setting |
| cyclicShift-n2 | 0 | |
| nrofSRS-Ports | port1 | Number of antenna ports used for SRS transmission |
| Note: For further information see clause 6.3.2 in TS 38.331 [2]. | | |

A.4.4.3.1.3 Test Requirements

The UE shall apply the signalled Timing Advance value for PSCell in sTAG to the transmission timing at the designated activation time i.e. $k+1$ slots after the reception of the timing advance command, where $k=5$.

The Timing Advance adjustment accuracy for PSCell in sTAG shall be within the limits specified in clause 7.3.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.4.5 Signaling characteristics

A.4.5.1 Radio link Monitoring

In the following clause, any uplink signal transmitted by the UE is used for detecting the In-/Out-of-Sync state of the UE. In terms of measurement, the uplink signal is verified on the basis of the UE output power:

For intra-band contiguous carrier aggregation, transmit OFF power is measured as the mean power per component carrier.

For UE with multiple transmit antennas, transmit OFF power is measured as the mean power at each transmit connector.

- UE output power higher than Transmit OFF power -50 dBm (as defined in TS 38.101-3 [20]) means uplink signal
- UE output power equal to or less than Transmit OFF power -50 dBm (as defined in TS 38.101-3 [20]) means no uplink signal.

A.4.5.1.1 Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with SSB-based RLM RS in non-DRX mode

A.4.5.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell. This test will partly verify the FR1 PSCell radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.4.5.1.1.1-1. The test parameters are given in Tables A.4.5.1.1.1-2, A.4.5.1.1.1-3, and A.4.5.1.1.1-4 below. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.4.5.1.1.1-1 shows the variation of the downlink SNR in the active Cell 2 to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 1.

Table A.4.5.1.1.1-1: Supported test configurations for FR1 PSCell

| Configuration | Description |
|---------------|--|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to pass in one of the supported test configurations in FR1 |

Table A.4.5.1.1.1-2: General test parameters for FR1 out-of-sync testing in non-DRX mode

| Parameter | Unit | Value |
|--------------------------------|-------------------------|-----------------------------|
| | | Test 1 |
| Active E-UTRA PCell | | Cell 1 |
| E-UTRA RF Channel Number | | 1 |
| Active PSCell | | Cell 2 |
| RF Channel Number | | 2 |
| Duplex mode | Config 1, 4 | FDD |
| | Config 2, 3, 5, 6 | TDD |
| BW _{channel} | Config 1, 4 | 10: N _{RB,c} = 52 |
| | Config 2, 5 | 10: N _{RB,c} = 52 |
| | Config 3, 6 | 40: N _{RB,c} = 106 |
| DL initial BWP configuration | Config 1, 2, 3, 4, 5, 6 | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1, 2, 3, 4, 5, 6 | DLBWP.1.1 |
| UL initial BWP configuration | Config 1, 2, 3, 4, 5, 6 | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1, 2, 3, 4, 5, 6 | ULBWP.1.1 |
| TDD Configuration | Config 1, 4 | Not Applicable |
| | Config 2, 5 | TDDConf.1.1 |
| | Config 3, 6 | TDDConf.2.1 |

| | | | |
|---|--|-----|-------------------|
| CORESET Reference Channel | Config 1, 4 | | CR.1.1 FDD |
| | Config 2, 5 | | CR.1.1 TDD |
| | Config 3, 6 | | CR.2.1 TDD |
| SSB Configuration | Config 1, 4 | | SSB.1 FR1 |
| | Config 2, 5 | | SSB.1 FR1 |
| | Config 3, 6 | | SSB.2 FR1 |
| SMTTC Configuration | Config 1, 2, 4, 5 | | SMTTC.1 |
| | Config 3, 6 | | SMTTC.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2, 4, 5 | | 15 kHz |
| | Config 3, 6 | | 30 kHz |
| PRACH Configuration | Config 1, 2, 4, 5 | | Table A.3.8.2.1-1 |
| | Config 3, 6 | | Table A.3.8.2.1-1 |
| SSB index assigned as RLM RS | | | 0 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| Correlation Matrix and Antenna Configuration | | | 2x2 Low |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average SSS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| DRX | | | OFF |
| Gap pattern ID | | | gp0 |
| Layer 3 filtering | | | Enabled |
| T310 timer | ms | | 0 |
| T311 timer | ms | | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |
| CSI-RS for CSI reporting | Config 1, 4 | | CSI-RS.1.1 FDD |
| | Config 2, 5 | | CSI-RS.1.1 TDD |
| | Config 3, 6 | | CSI-RS.2.1 TDD |
| CSI-RS for tracking | Config 1, 4 | | TRS.1.1 FDD |
| | Config 2, 5 | | TRS.1.1 TDD |
| | Config 3, 6 | | TRS.1.2 TDD |
| T1 | s | | 0.2 |
| T2 | s | | 0.48 |
| T3 | s | | 0.48 |
| D1 | s | | 0.44 |
| Note 1: All configurations are assigned to the UE prior to the start of time period T1. | | | |
| Note 2: UE-specific PDCCH is not transmitted after T1 starts. | | | |
| Note 3: E-UTRAN is in non-DRX mode under test. | | | |

Table A.4.5.1.1.1-3: Cell specific test parameters for FR1 (Cell 2) for out-of-sync radio link monitoring tests in non-DRX mode

| Parameter | Unit | Test 1 | | |
|-----------|------|--------|----|----|
| | | T1 | T2 | T3 |
| | | | | |

| | | | | | |
|--|-------------------------|---------|-------------------|----|-----|
| EPRE ratio of PDCCH DMRS to SSS | | dB | 4 | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | dB | 0 | | |
| EPRE ratio of PBCH DMRS to SSS | | dB | 0 | | |
| EPRE ratio of PBCH to PBCH DMRS | | dB | | | |
| EPRE ratio of PSS to SSS | | dB | | | |
| EPRE ratio of PDSCH DMRS to SSS | | dB | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | dB | | | |
| EPRE ratio of OCNG DMRS to SSS | | dB | | | |
| EPRE ratio of OCNG to OCNG DMRS | | dB | | | |
| SNR on RLM-RS | Config 1, 4 | dB | 1 | -7 | -15 |
| | Config 2, 5 | | 1 | -7 | -15 |
| | Config 3, 6 | | 1 | -7 | -15 |
| SNR on other channels and signals | Config 1, 2, 3, 4, 5, 6 | dB | 1 | | |
| N_{oc} | Config 1, 4 | dBm/15 | -98 | | |
| | Config 2, 5 | | -98 | | |
| | Config 3, 6 | kHz | -98 | | |
| N_{oc} | Config 1, 4 | dBm/SCS | -98 | | |
| | Config 2, 5 | | -98 | | |
| | Config 3, 6 | | -95 | | |
| Propagation condition | | | TDL-C 300ns 100Hz | | |
| <p>Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.</p> <p>Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.</p> | | | | | |

Table A.4.5.1.1-4: Measurement gap configuration for out-of-sync tests in non-DRX mode

| Field | Test 1 |
|--|--------|
| | Value |
| gapOffset | 0 |
| <p>Note 1: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned. (Ensure that RLM RS is partially overlapped with measurement gap).</p> | |

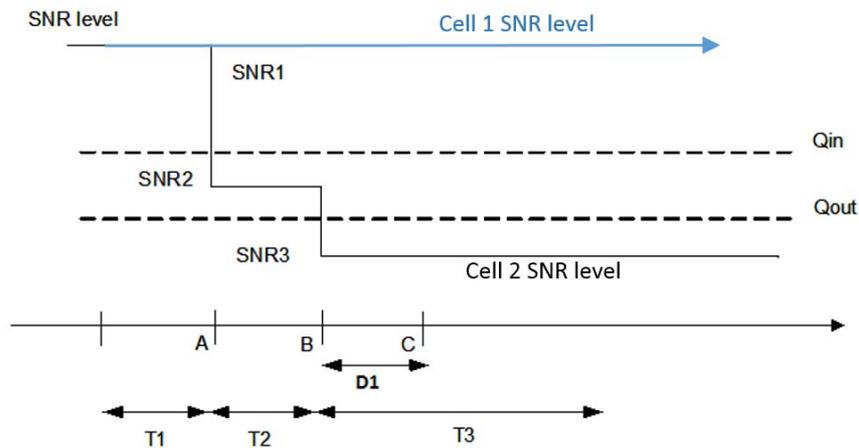


Figure A.4.5.1.1.1-1: SNR variation for out-of-sync testing

A.4.5.1.1.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal in Cell 2 no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.1.2 Radio Link Monitoring In-sync Test for FR1 PSCell configured with SSB-based RLM RS in non-DRX mode

A.4.5.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell. This test will partly verify the FR1 PSCell radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.4.5.1.2.1-1. The test parameters are given in Tables A.4.5.1.2.1-2, and A.4.5.1.2.1-3 below. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.1.2.1-1 shows the variation of the downlink SNR in the active Cell 2 to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

Table A.4.5.1.2.1-1: Supported test configurations for FR1 PSCell

| Configuration | Description |
|---------------|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |

Note: The UE is only required to pass in one of the supported test configurations in FR1

Table A.4.5.1.2.1-2: General test parameters for FR1 in-sync testing in non-DRX mode

| Parameter | | Unit | Value |
|--|-------------------------|------|-----------------------------|
| | | | Test 1 |
| Active E-UTRA PCell | | | Cell 1 |
| E-UTRA RF Channel Number | | | 1 |
| Active PSCell | | | Cell 2 |
| RF Channel Number | | | 2 |
| Duplex mode | Config 1, 4 | | FDD |
| | Config 2, 3, 5, 6 | | TDD |
| BW _{channel} | Config 1, 4 | MHz | 10: N _{RB,c} = 52 |
| | Config 2, 5 | | 10: N _{RB,c} = 52 |
| | Config 3, 6 | | 40: N _{RB,c} = 106 |
| DL initial BWP configuration | Config 1, 2, 3, 4, 5, 6 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1, 2, 3, 4, 5, 6 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1, 2, 3, 4, 5, 6 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1, 2, 3, 4, 5, 6 | | ULBWP.1.1 |
| TDD Configuration | Config 1, 4 | | Not Applicable |
| | Config 2, 5 | | TDDConf.1.1 |
| | Config 3, 6 | | TDDConf.2.1 |
| CORESET Reference Channel | Config 1, 4 | | CR.1.1 FDD |
| | Config 2, 5 | | CR.1.1 TDD |
| | Config 3, 6 | | CR.2.1 TDD |
| SSB Configuration | Config 1, 4 | | SSB.1 FR1 |
| | Config 2, 5 | | SSB.1 FR1 |
| | Config 3, 6 | | SSB.2 FR1 |
| SMTTC Configuration | Config 1, 2, 4, 5 | | SMTTC.1 |
| | Config 3, 6 | | SMTTC.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2, 4, 5 | | 15 kHz |
| | Config 3, 6 | | 30 kHz |
| PRACH Configuration | Config 1, 2, 4, 5 | | Table A.3.8.2.1-1 |
| | Config 3, 6 | | Table A.3.8.2.1-1 |
| SSB index assigned as RLM RS | | | 0 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| Correlation Matrix and Antenna Configuration | | | 2x2 Low |

| | | | |
|-------------------------------------|---|-----|-----------------|
| In sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 4 |
| | Ratio of hypothetical PDCCH RE energy to average SSS RE energy | dB | 0 |
| | Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | dB | 0 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average SSS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| DRX | | | <i>OFF</i> |
| Gap pattern ID | | | <i>N.A.</i> |
| Layer 3 filtering | | | <i>Enabled</i> |
| T310 timer | | ms | 1000 |
| T311 timer | | ms | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |
| CSI-RS for CSI reporting | Config 1, 4 | | CSI-RS.1.1 FDD |
| | Config 2, 5 | | CSI-RS.1.1 TDD |
| | Config 3, 6 | | CSI-RS.2.1 TDD |
| CSI-RS for tracking | Config 1, 4 | | TRS.1.1 FDD |
| | Config 2, 5 | | TRS.1.1 TDD |
| | Config 3, 6 | | TRS.1.2 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 0.2 |
| T3 | | s | 0.24 |
| T4 | | s | 0.2 |
| T5 | | s | 0.88 |
| D1 | | s | 0.84 |
| Note 1: | All configurations are assigned to the UE prior to the start of time period T1. | | |
| Note 2: | UE-specific PDCCH is not transmitted after T1 starts. | | |
| Note 3: | E-UTRAN is in non-DRX mode under test. | | |

Table A.4.5.1.2.1-3: Cell specific test parameters for FR1 (Cell 2) for in-sync radio link monitoring tests in non-DRX mode

| Parameter | | Unit | Test 1 | | | | |
|-----------------------------------|-------------------------|--|-------------------|----|-----|------|----|
| | | | T1 | T2 | T3 | T4 | T5 |
| EPRE ratio of PDCCH DMRS to SSS | | dB | 4 | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | dB | 0 | | | | |
| EPRE ratio of PBCH DMRS to SSS | | dB | 0 | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | dB | | | | | |
| EPRE ratio of PSS to SSS | | dB | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | dB | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | dB | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | dB | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | dB | | | | | |
| SNR on RLM-RS | Config 1, 4 | dB | 1 | -7 | -15 | -4.5 | 1 |
| | Config 2, 5 | | 1 | -7 | -15 | -4.5 | 1 |
| | Config 3, 6 | | 1 | -7 | -15 | -4.5 | 1 |
| SNR on other channels and signals | Config 1, 2, 3, 4, 5, 6 | dB | 1 | | | | |
| N_{oc} | Config 1, 4 | dBm/ | -98 | | | | |
| | Config 2, 5 | 15 | -98 | | | | |
| | Config 3, 6 | kHz | -98 | | | | |
| N_{oc} | Config 1, 4 | dBm/ | -98 | | | | |
| | Config 2, 5 | SCS | -98 | | | | |
| | Config 3, 6 | | -95 | | | | |
| Propagation condition | | | TDL-C 300ns 100Hz | | | | |
| Note 1: | | OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | |
| Note 2: | | The signal contains PDCCH for UEs other than the device under test as part of OCNG. | | | | | |
| Note 3: | | SNR levels correspond to the signal to noise ratio over the SSS REs. | | | | | |
| Note 4: | | The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.4.5.1.2.1-1. | | | | | |
| Note 5: | | The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 and T4 is modified as specified in clause A.3.6. | | | | | |

Table A.4.5.1.2.1-4: Void

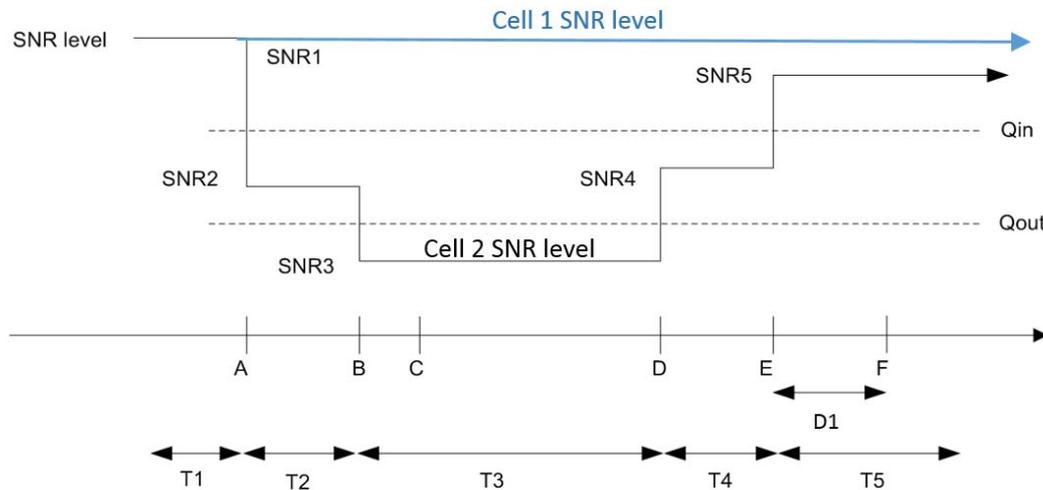


Figure A.4.5.1.2.1-1: SNR variation for in-sync testing

A.4.5.1.2.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.1.3 Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with SSB-based RLM RS in DRX mode

A.4.5.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.4.5.1.3.1-1. The test parameters are given in Tables A.4.5.1.3.1-2 and A.4.5.1.3.1-3. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.4.5.1.3.1-1 shows the variation of the downlink SNR in the active Cell 2 to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-

duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.4.5.1.3.1-1: Supported test configurations for FR1 PSCell

| Configuration | Description |
|---------------|--|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to pass in one of the supported test configurations in FR1 |

Table A.4.5.1.3.1-2: General test parameters for FR1 out-of-sync testing in DRX mode

| Parameter | | Unit | Value |
|--------------------------------|-------------------------|------|-----------------------------|
| | | | Test 1 |
| Active E-UTRA PCell | | | Cell 1 |
| E-UTRA RF Channel Number | | | 1 |
| Active PSCell | | | Cell 2 |
| RF Channel Number | | | 2 |
| Duplex mode | Config 1, 4 | | FDD |
| | Config 2, 3, 5, 6 | | TDD |
| BW _{channel} | Config 1, 4 | MHz | 10: N _{RB,c} = 52 |
| | Config 2, 5 | | 10: N _{RB,c} = 52 |
| | Config 3, 6 | | 40: N _{RB,c} = 106 |
| DL initial BWP configuration | Config 1, 2, 3, 4, 5, 6 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1, 2, 3, 4, 5, 6 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1, 2, 3, 4, 5, 6 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1, 2, 3, 4, 5, 6 | | ULBWP.1.1 |
| TDD Configuration | Config 1, 4 | | Not Applicable |
| | Config 2, 5 | | TDDConf.1.1 |
| | Config 3, 6 | | TDDConf.2.1 |
| CORESET Reference Channel | Config 1, 4 | | CR.1.1 FDD |
| | Config 2, 5 | | CR.1.1 TDD |
| | Config 3, 6 | | CR.2.1 TDD |
| SSB Configuration | Config 1, 4 | | SSB.1 FR1 |
| | Config 2, 5 | | SSB.1 FR1 |
| | Config 3, 6 | | SSB.2 FR1 |
| SMTC Configuration | Config 1, 2, 4, 5 | | SMTC.1 |
| | Config 3, 6 | | SMTC.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2, 4, 5 | | 15 kHz |
| | Config 3, 6 | | 30 kHz |
| PRACH Configuration | Config 1, 2, 4, 5 | | Table A.3.8.2.1-1 |
| | Config 3, 6 | | Table A.3.8.2.1-1 |
| SSB index assigned as RLM RS | | | 0 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |

| | | | |
|---|--|-----|-----------------|
| Correlation Matrix and Antenna Configuration | | | 2x2 Low |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average SSS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| DRX Configuration | | | DRX.3 |
| Gap pattern ID | | | N.A. |
| Layer 3 filtering | | | <i>Enabled</i> |
| T310 timer | | ms | 0 |
| T311 timer | | ms | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |
| CSI-RS for CSI reporting | Config 1, 4 | | CSI-RS.1.1 FDD |
| | Config 2, 5 | | CSI-RS.1.1 TDD |
| | Config 3, 6 | | CSI-RS.2.1 TDD |
| CSI-RS for tracking | Config 1, 4 | | TRS.1.1 FDD |
| | Config 2, 5 | | TRS.1.1 TDD |
| | Config 3, 6 | | TRS.1.2 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 0.68 |
| T3 | | s | 0.68 |
| D1 | | s | 0.64 |
| Note 1: All configurations are assigned to the UE prior to the start of time period T1. | | | |
| Note 2: UE-specific PDCCH is not transmitted after T1 starts. | | | |
| Note 3: E-UTRAN is in non-DRX mode under test. | | | |

Table A.4.5.1.3.1-3: Cell specific test parameters for FR1 (Cell 2) for out-of-sync radio link monitoring tests in DRX mode

| Parameter | | Unit | Test 1 | | |
|-----------------------------------|-------------|------|--------|----|-----|
| | | | T1 | T2 | T3 |
| EPRE ratio of PDCCH DMRS to SSS | | dB | 4 | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | dB | 0 | | |
| EPRE ratio of PBCH DMRS to SSS | | dB | 0 | | |
| EPRE ratio of PBCH to PBCH DMRS | | dB | | | |
| EPRE ratio of PSS to SSS | | dB | | | |
| EPRE ratio of PDSCH DMRS to SSS | | dB | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | dB | | | |
| EPRE ratio of OCNG DMRS to SSS | | dB | | | |
| EPRE ratio of OCNG to OCNG DMRS | | dB | | | |
| SNR on RLM-RS | Config 1, 4 | dB | 1 | -7 | -15 |
| | Config 2, 5 | | 1 | -7 | -15 |
| | Config 3, 6 | | 1 | -7 | -15 |

| | | | |
|--|-------------------------|------------|-------------------|
| SNR on other channels and signals | Config 1, 2, 3, 4, 5, 6 | dB | 1 |
| N_{oc} | Config 1, 4 | dBm/15k Hz | -98 |
| | Config 2, 5 | | -98 |
| | Config 3, 6 | | -98 |
| N_{oc} | Config 1, 4 | dBm/SCS | -98 |
| | Config 2, 5 | | -98 |
| | Config 3, 6 | | -95 |
| Propagation condition | | | TDL-C 300ns 100Hz |
| <p>Note 1: OCNB shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNB.</p> <p>Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.</p> <p>Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure A.4.5.1.3.1-1.</p> <p>Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.</p> | | | |

Table A.4.5.1.3.1-4: Void

Table A.4.5.1.3.1-5: Void

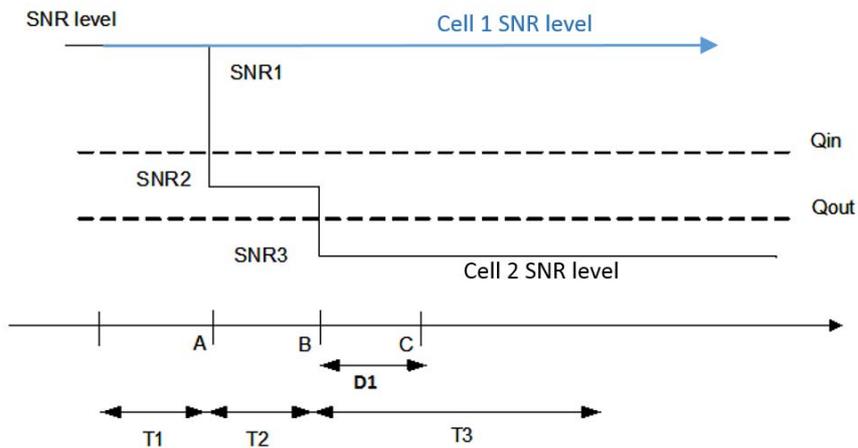


Figure A.4.5.1.3.1-1: SNR variation for out-of-sync testing

A.4.5.1.3.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal in Cell 2 no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.1.4 Radio Link Monitoring In-sync Test for FR1 PSCell configured with SSB-based RLM RS in DRX mode

A.4.5.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.4.5.1.4.1-1. The test parameters are given in Tables A.4.5.1.4.1-2, and A.4.5.1.4.1-3. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.1.4.1-1 shows the variation of the downlink SNR in the active Cell 2 to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.4.5.1.4.1-1: Supported test configurations for FR1 PSCell

| Configuration | Description |
|---------------|--|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to pass in one of the supported test configurations in FR1 |

Table A.4.5.1.4.1-2: General test parameters for FR1 in-sync testing in DRX mode

| Parameter | Unit | Value |
|--------------------------------|-------------------------|-----------------------------|
| | | Test 1 |
| Active E-UTRA PCell | | Cell 1 |
| E-UTRA RF Channel Number | | 1 |
| Active PSCell | | Cell 2 |
| RF Channel Number | | 2 |
| Duplex mode | Config 1, 4 | FDD |
| | Config 2, 3, 5, 6 | TDD |
| BW _{channel} | Config 1, 4 | 10: N _{RB,c} = 52 |
| | Config 2, 5 | 10: N _{RB,c} = 52 |
| | Config 3, 6 | 40: N _{RB,c} = 106 |
| DL initial BWP configuration | Config 1, 2, 3, 4, 5, 6 | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1, 2, 3, 4, 5, 6 | DLBWP.1.1 |
| UL initial BWP configuration | Config 1, 2, 3, 4, 5, 6 | ULBWP.0.1 |

| | | | |
|--|--|-----|-------------------|
| UL dedicated BWP configuration | Config 1, 2, 3, 4, 5, 6 | | ULBWP.1.1 |
| TDD Configuration | Config 1, 4 | | Not Applicable |
| | Config 2, 5 | | TDDConf.1.1 |
| | Config 3, 6 | | TDDConf.2.1 |
| CORESET Reference Channel | Config 1, 4 | | CR.1.1 FDD |
| | Config 2, 5 | | CR.1.1 TDD |
| | Config 3, 6 | | CR.2.1 TDD |
| SSB Configuration | Config 1, 4 | | SSB.1 FR1 |
| | Config 2, 5 | | SSB.1 FR1 |
| | Config 3, 6 | | SSB.2 FR1 |
| SMTTC Configuration | Config 1, 2, 4, 5 | | SMTTC.1 |
| | Config 3, 6 | | SMTTC.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2, 4, 5 | | 15 kHz |
| | Config 3, 6 | | 30 kHz |
| PRACH Configuration | Config 1, 2, 4, 5 | | Table A.3.8.2.1-1 |
| | Config 3, 6 | | Table A.3.8.2.1-1 |
| SSB index assigned as RLM RS | | | 0 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| Correlation Matrix and Antenna Configuration | | | 2x2 Low |
| In sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 4 |
| | Ratio of hypothetical PDCCH RE energy to average SSS RE energy | dB | 0 |
| | Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | dB | 0 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average SSS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| DRX Configuration | | | DRX.3 |
| Gap pattern ID | | | N.A. |
| Layer 3 filtering | | | <i>Enabled</i> |
| T310 timer | ms | | 1000 |
| T311 timer | ms | | 1000 |
| N310 | | | 1 |

| | | | |
|--------------------------|---|---|----------------|
| N311 | | | 1 |
| CSI-RS for CSI reporting | Config 1, 4 | | CSI-RS.1.1 FDD |
| | Config 2, 5 | | CSI-RS.1.1 TDD |
| | Config 3, 6 | | CSI-RS.2.1 TDD |
| CSI-RS for tracking | Config 1, 4 | | TRS.1.1 FDD |
| | Config 2, 5 | | TRS.1.1 TDD |
| | Config 3, 6 | | TRS.1.2 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 0.2 |
| T3 | | s | 0.64 |
| T4 | | s | 0.2 |
| T5 | | s | 0.88 |
| D1 | | s | 0.84 |
| Note 1: | All configurations are assigned to the UE prior to the start of time period T1. | | |
| Note 2: | UE-specific PDCCH is not transmitted after T1 starts. | | |
| Note 3: | E-UTRAN is in non-DRX mode under test. | | |

Table A.4.5.1.4.1-3: Cell specific test parameters for FR1 (Cell 2) for in-sync radio link monitoring tests in DRX mode

| Parameter | | Unit | Test 1 | | | | |
|-----------------------------------|--|------------|-------------------|----|-----|------|----|
| | | | T1 | T2 | T3 | T4 | T5 |
| EPRE ratio of PDCCH DMRS to SSS | | dB | 4 | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | dB | 0 | | | | |
| EPRE ratio of PBCH DMRS to SSS | | dB | 0 | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | dB | | | | | |
| EPRE ratio of PSS to SSS | | dB | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | dB | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | dB | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | dB | 1 | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | dB | | | | | |
| SNR on RLM-RS | Config 1, 4 | dB | 1 | -7 | -15 | -4.5 | 1 |
| | Config 2, 5 | | 1 | -7 | -15 | -4.5 | 1 |
| | Config 3, 6 | | 1 | -7 | -15 | -4.5 | 1 |
| SNR on other channels and signals | Config 1, 2, 3, 4, 5, 6 | dB | 1 | | | | |
| N_{oc} | Config 1, 4 | dBm/15 kHz | -98 | | | | |
| | Config 2, 5 | | -98 | | | | |
| | Config 3, 6 | | -98 | | | | |
| N_{oc} | Config 1, 4 | dBm/SCS | -98 | | | | |
| | Config 2, 5 | | -98 | | | | |
| | Config 3, 6 | | -95 | | | | |
| Propagation condition | | | TDL-C 300ns 100Hz | | | | |
| Note 1: | OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | |
| Note 2: | The signal contains PDCCH for UEs other than the device under test as part of OCNG. | | | | | | |
| Note 3: | SNR levels correspond to the signal to noise ratio over the SSS REs. | | | | | | |
| Note 4: | The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.4.5.1.4.1-1. | | | | | | |
| Note 5: | The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 and T4 is modified as specified in clause A.3.6. | | | | | | |

Table A.4.5.1.4.1-4: Void

Table A.4.5.1.4.1-5: Void

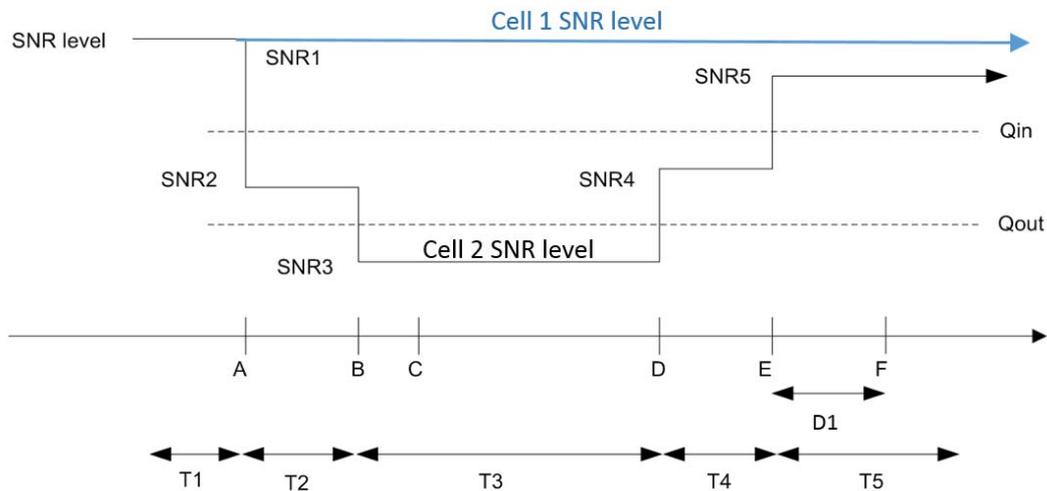


Figure A.4.5.1.4.1-1: SNR variation for in-sync testing

A.4.5.1.4.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.1.5 EN-DC Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode

A.4.5.1.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.4.5.1.5.1-1, A.4.5.1.5.1-2, A.4.5.1.5.1-3, and A.4.5.1.5.1-3A below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.4.5.1.5.1-1 shows the variation of the downlink SNR in the E-UTRAN PCell and the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms). In the test, SSB0 is configured as the BFD-RS.

Table A.4.5.1.5.1-1: Supported test configurations for FR1 PSCell

| Configuration | Description |
|--|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to pass in one of the supported test configurations in FR1 | |

Table A.4.5.1.5.1-2: General test parameters for FR1 PSCell for CSI-RS out-of-sync testing in non-DRX mode

| Parameter | | Unit | Value Test 1 |
|--|-------------------------|------|----------------------------|
| Active E-UTRA PCell | | | Cell 1 |
| E-UTRA RF Channel Number | | | 1 |
| Active PSCell | | | Cell 2 |
| RF Channel Number | | | 2 |
| Duplex mode | Config 1, 4 | | FDD |
| | Config 2, 3, 5, 6 | | TDD |
| TDD Configuration | Config 1, 4 | | Not Applicable |
| | Config 2, 5 | | TDDConf.1.1 |
| | Config 3, 6 | | TDDConf.2.1 |
| DL initial BWP configuration | Config 1, 2, 3, 4, 5, 6 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1, 2, 3, 4, 5, 6 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1, 2, 3, 4, 5, 6 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1, 2, 3, 4, 5, 6 | | ULBWP.1.1 |
| RMC CORESET Reference Channel | Config 1, 4 | | CCR.1.1 FDD |
| | Config 2, 5 | | CCR.1.1 TDD |
| | Config 3, 6 | | CCR.2.1 TDD |
| SSB Configuration | Config 1, 4 | | SSB.1 FR1 |
| | Config 2, 5 | | SSB.1 FR1 |
| | Config 3, 6 | | SSB.2 FR1 |
| SMTTC Configuration | Config 1, 2, 4, 5 | | SMTTC.1 |
| | Config 3, 6 | | SMTTC.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2, 4, 5 | | 15 KHz |
| | Config 3, 6 | | 30 KHz |
| TRS configuration | Config 1, 4 | | TRS.1.1 FDD |
| | Config 2, 5 | | TRS.1.1 TDD |
| | Config 3, 6 | | TRS.1.2 TDD |
| CSI-RS for RLM | Config 1, 4 | | Resource #4 in TRS.1.1 FDD |
| | Config 2, 5 | | Resource #4 in TRS.1.1 TDD |
| | Config 3, 6 | | Resource #4 in TRS.1.2 TDD |
| TCI configuration for PDCCH/PDSCH | | | TCI.State.0 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| Correlation Matrix and Antenna Configuration | | | 2x2 Low |
| | DCI format | | 1-0 |

| | | | |
|---|---|-----|-----------------|
| Out of sync transmission parameters | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| DRX | | | OFF |
| Gap pattern ID | | | gp0 |
| Layer 3 filtering | | | Enabled |
| T310 timer | | ms | 0 |
| T311 timer | | ms | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |
| CSI-RS for reporting | Config 1, 4 | | CSI-RS.1.1 FDD |
| | Config 2, 5 | | CSI-RS.1.1 TDD |
| | Config 3, 6 | | CSI-RS.2.1 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 0.48 |
| T3 | | s | 0.48 |
| D1 | | s | 0.44 |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | |
| Note 2: E-UTRAN is in non-DRX mode under test. | | | |

Table A.4.5.1.5.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in non-DRX mode

| Parameter | | Unit | Test 1 | | |
|-----------------------------------|-------------|---------|--------|----|-----|
| | | | T1 | T2 | T3 |
| PDCCH_beta | | dB | 4 | | |
| PDCCH_DMRS_beta | | dB | 4 | | |
| PBCH_beta | | dB | 0 | | |
| PSS_beta | | dB | | | |
| SSS_beta | | dB | | | |
| PDSCH_beta | | dB | | | |
| OCNG_beta | | dB | | | |
| SNR on RLM-RS | Config 1, 4 | dB | 1 | -7 | -15 |
| | Config 2, 5 | | 1 | -7 | -15 |
| | Config 3, 6 | | 1 | -7 | -15 |
| SNR on other channels and signals | Config 1, 4 | dB | 1 | | |
| | Config 2, 5 | | 1 | | |
| | Config 3, 6 | | 1 | | |
| N_{oc} | Config 1, 4 | dBm/15K | -98 | | |
| | Config 2, 5 | Hz | -98 | | |
| | Config 3, 6 | | -98 | | |

| Propagation condition | TDL-C 300ns 100Hz |
|-----------------------|---|
| Note 1: | OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
| Note 2: | The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. |
| Note 3: | NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. |
| Note 4: | Measurement gap configuration is assigned to the UE prior to the start of time period T1. |
| Note 5: | The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. |
| Note 6: | The signal contains PDCCH for UEs other than the device under test as part of OCNG. |
| Note 7: | SNR levels correspond to the signal to noise ratio over the SSS REs. |
| Note 8: | The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.1.5.1-1. |
| Note 9: | The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is [A.3.6]. |

Table A.4.5.1.5.1-3A: Measurement gap configuration for FR1 CSI-RS out-of-sync radio link monitoring in non-DRX mode

| Field | Test 1 |
|--|--------|
| | Value |
| gapOffset | 0 |
| Note 1: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned. | |

Table A.4.5.1.5.1-4: Void

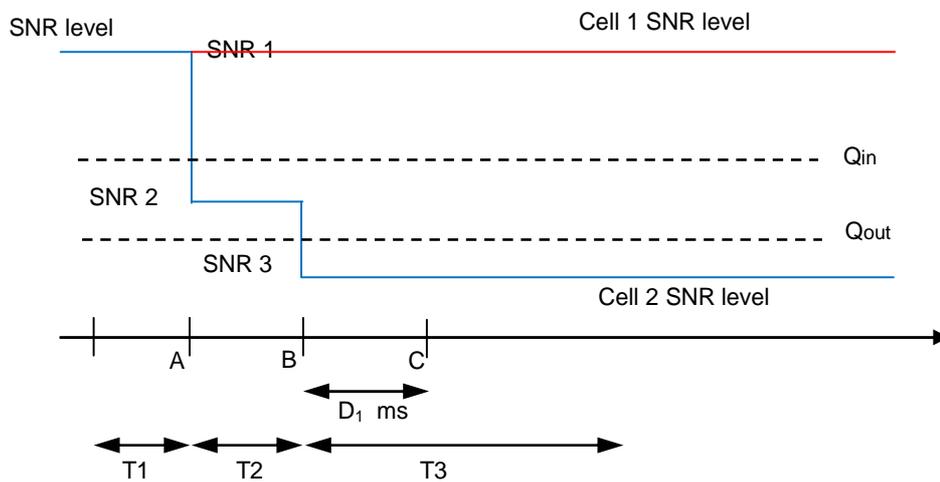


Figure A.4.5.1.5.1-1: SNR variation for CSI-RS out-of-sync testing

A.4.5.1.5.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 (PSCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

The UE shall stop transmitting uplink signal in Cell 2 (PSCell) no later than time point C (D_1 after the start of the time duration T3) on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.1.6 EN-DC Radio Link Monitoring In-sync Test for FR1 PSCell configured with CSI-RS-based RLM in non-DRX mode

A.4.5.1.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when no DRX is used. This test will partly verify the FR1 PSCell CSI-RS In-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.4.5.1.6.1-1, A.4.5.1.6.1-2, and A.4.5.1.6.1-3 below. There are two cells, cell 1 which is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.1.6.1-1 shows the variation of the downlink SNR in the PSCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is not enabled. In the test, SSB0 is configured as the BFD-RS.

Table A.4.5.1.6.1-1: Supported test configurations for FR1 PSCell

| Configuration | Description |
|---------------|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |

Note: The UE is only required to pass in one of the supported test configurations in FR1

Table A.4.5.1.6.1-2: General test parameters for FR1 PSCell for CSI-RS in-sync testing in non-DRX mode

| Parameter | | Unit | Value |
|--------------------------|-------------------|------|----------------|
| | | | Test 1 |
| Active E-UTRA PCell | | | Cell 1 |
| E-UTRA RF Channel Number | | | 1 |
| Active PSCell | | | Cell 2 |
| RF Channel Number | | | 2 |
| Duplex mode | Config 1, 4 | | FDD |
| | Config 2, 3, 5, 6 | | TDD |
| TDD Configuration | Config 1, 4 | | Not Applicable |
| | Config 2, 5 | | TDDConf.1.1 |
| | Config 3, 6 | | TDDConf.2.1 |

| | | | |
|--|---|-----|----------------------------|
| DL initial BWP configuration | Config 1, 2, 3, 4, 5, 6 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1, 2, 3, 4, 5, 6 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1, 2, 3, 4, 5, 6 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1, 2, 3, 4, 5, 6 | | ULBWP.1.1 |
| RMC CORESET Reference Channel | Config 1, 4 | | CCR.1.1 FDD |
| | Config 2, 5 | | CCR.1.1 TDD |
| | Config 3, 6 | | CCR.2.1 TDD |
| SSB Configuration | Config 1, 4 | | SSB.1 FR1 |
| | Config 2, 5 | | SSB.1 FR1 |
| | Config 3, 6 | | SSB.2 FR1 |
| SMTC Configuration | Config 1, 2, 4, 5 | | SMTC.1 |
| | Config 3, 6 | | SMTC.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2, 4, 5 | | 15 KHz |
| | Config 3, 6 | | 30 KHz |
| TRS configuration | Config 1, 4 | | TRS.1.1 FDD |
| | Config 2, 5 | | TRS.1.1 TDD |
| | Config 3, 6 | | TRS.1.2 TDD |
| CSI-RS for RLM | Config 1, 4 | | Resource #4 in TRS.1.1 FDD |
| | Config 2, 5 | | Resource #4 in TRS.1.1 TDD |
| | Config 3, 6 | | Resource #4 in TRS.1.2 TDD |
| TCI configuration for PDCCH/PDSCH | | | TCI.State.0 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| Correlation Matrix and Antenna Configuration | | | 2x2 Low |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| In sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 4 |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| DRX | | | OFF |
| Gap pattern ID | | | N.A. |
| Layer 3 filtering | | | Enabled |
| T310 timer | ms | | 1000 |

| | | | |
|---|-------------|----|----------------|
| T311 timer | | ms | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |
| CSI-RS for reporting | Config 1, 4 | | CSI-RS.1.1 FDD |
| | Config 2, 5 | | CSI-RS.1.1 TDD |
| | Config 3, 6 | | CSI-RS.2.1 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 0.2 |
| T3 | | s | 0.44 |
| T4 | | s | 0.2 |
| T5 | | s | 0.88 |
| T6 | | s | 0.84 |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | |
| Note 2: E-UTRAN is in non-DRX mode under test. | | | |

Table A.4.5.1.6.1-3: Cell specific test parameters for FR1 for CSI-RS in-sync radio link monitoring in non-DRX mode

| Parameter | | Unit | Test 1 | | | | |
|---|-------------|-----------|-------------------|----|-----|------|----|
| | | | T1 | T2 | T3 | T4 | T5 |
| PDCCH_beta | | dB | 4 | | | | |
| PDCCH_DMRS_beta | | dB | 4 | | | | |
| PBCH_beta | | dB | 0 | | | | |
| PSS_beta | | dB | | | | | |
| SSS_beta | | dB | | | | | |
| PDSCH_beta | | dB | | | | | |
| OCNG_beta | | dB | | | | | |
| SNR on RLM-RS | Config 1, 4 | dB | 1 | -7 | -15 | -4.5 | 1 |
| | Config 2, 5 | | 1 | -7 | -15 | -4.5 | 1 |
| | Config 3, 6 | | 1 | -7 | -15 | -4.5 | 1 |
| SNR on other channels and signals | Config 1, 4 | dB | 1 | | | | |
| | Config 2, 5 | | 1 | | | | |
| | Config 3, 6 | | 1 | | | | |
| N_{oc} | Config 1, 4 | dBm/15KHz | -98 | | | | |
| | Config 2, 5 | | -98 | | | | |
| | Config 3, 6 | | -98 | | | | |
| Propagation condition | | | TDL-C 300ns 100Hz | | | | |
| Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | | |
| Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | | | |
| Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | | | |
| Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1. | | | | | | | |
| Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. | | | | | | | |
| Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG. | | | | | | | |
| Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs. | | | | | | | |
| Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.4.5.1.6.1-1. | | | | | | | |
| Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is [A.3.6]. | | | | | | | |

Table A.4.5.1.6.1-3A: Void

Table A.4.5.1.6.1-4: Void

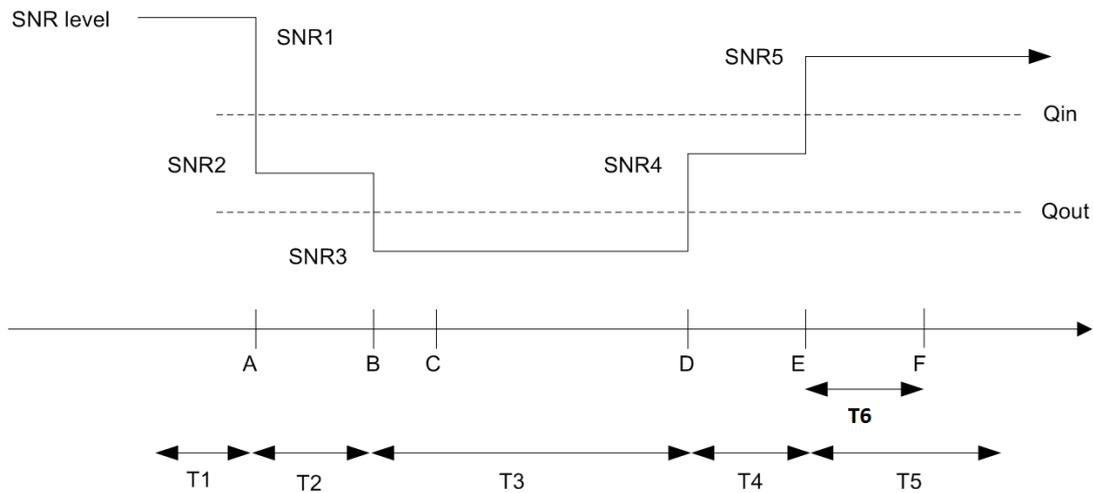


Figure A.4.5.1.6.1-1: SNR variation for CSI-RS in-sync testing

A.4.5.1.6.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.1.7 EN-DC Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with CSI-RS-based RLM in DRX mode

A.4.5.1.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when no DRX is used. This test will partly verify the FR1 PSCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.4.5.1.7.1-1, A.4.5.1.7.1-2, and A.4.5.1.7.1-3 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.4.5.1.7.1-1 shows the variation of the downlink SNR in the E-UTRAN PCell and the PSCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test. In the test, SSB0 is configured as the BFD-RS.

Table A.4.5.1.7.1-1: Supported test configurations for FR1 PSCell

| Configuration | Description |
|--|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to pass in one of the supported test configurations in FR1 | |

Table A.4.5.1.7.1-2: General test parameters for FR1 PSCell for CSI-RS out-of-sync testing in DRX mode

| Parameter | Unit | Value |
|--|-------------------------|----------------------------|
| | | Test 1 |
| Active E-UTRA PCell | | Cell 1 |
| E-UTRA RF Channel Number | | 1 |
| Active PSCell | | Cell 2 |
| RF Channel Number | | 2 |
| Duplex mode | Config 1, 4 | FDD |
| | Config 2, 3, 5, 6 | TDD |
| TDD Configuration | Config 1, 4 | Not Applicable |
| | Config 2, 5 | TDDConf.1.1 |
| | Config 3, 6 | TDDConf.2.1 |
| DL initial BWP configuration | Config 1, 2, 3, 4, 5, 6 | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1, 2, 3, 4, 5, 6 | DLBWP.1.1 |
| UL initial BWP configuration | Config 1, 2, 3, 4, 5, 6 | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1, 2, 3, 4, 5, 6 | ULBWP.1.1 |
| RMC CORESET Reference Channel | Config 1, 4 | CCR.1.1 FDD |
| | Config 2, 5 | CCR.1.1 TDD |
| | Config 3, 6 | CCR.2.1 TDD |
| SSB Configuration | Config 1, 4 | SSB.1 FR1 |
| | Config 2, 5 | SSB.1 FR1 |
| | Config 3, 6 | SSB.2 FR1 |
| SMTc Configuration | Config 1, 2, 4, 5 | SMTc.1 |
| | Config 3, 6 | SMTc.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2, 4, 5 | 15 KHz |
| | Config 3, 6 | 30 KHz |
| TRS configuration | Config 1, 4 | TRS.1.1 FDD |
| | Config 2, 5 | TRS.1.1 TDD |
| | Config 3, 6 | TRS.1.2 TDD |
| CSI-RS for RLM | Config 1, 4 | Resource #4 in TRS.1.1 FDD |
| | Config 2, 5 | Resource #4 in TRS.1.1 TDD |
| | Config 3, 6 | Resource #4 in TRS.1.2 TDD |
| TCI configuration for PDCCH/PDSCH | | TCI.State.0 |
| OCNG parameters | | OP.1 |
| CP length | | Normal |
| Correlation Matrix and Antenna Configuration | | 2x2 Low |
| | DCI format | 1-0 |

| | | | |
|---|---|-----|-----------------|
| Out of sync transmission parameters | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| DRX | | | DRX.3 |
| Gap pattern ID | | | N.A. |
| Layer 3 filtering | | | Enabled |
| T310 timer | | ms | 0 |
| T311 timer | | ms | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |
| CSI-RS for reporting | Config 1, 4 | | CSI-RS.1.1 FDD |
| | Config 2, 5 | | CSI-RS.1.1 TDD |
| | Config 3, 6 | | CSI-RS.2.1 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 1.28 |
| T3 | | s | 1.28 |
| D1 | | s | 1.24 |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | |
| Note 2: E-UTRAN is in non-DRX mode under test. | | | |

Table A.4.5.1.7.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in DRX mode

| Parameter | | Unit | Test 1 | | |
|---|--|-----------|-------------------|----|-----|
| | | | T1 | T2 | T3 |
| PDCCH_beta | | dB | 4 | | |
| PDCCH_DMRS_beta | | dB | 4 | | |
| PBCH_beta | | dB | 0 | | |
| PSS_beta | | dB | | | |
| SSS_beta | | dB | | | |
| PDSCH_beta | | dB | | | |
| OCNG_beta | | dB | | | |
| SNR | | dB | | | |
| | | | 1 | -7 | -15 |
| | | | 1 | -7 | -15 |
| SNR on other channels and signals | | dB | 1 | | |
| | | | 1 | | |
| | | | 1 | | |
| N_{oc} | | dBm/15KHz | -98 | | |
| | | | -98 | | |
| | | | -98 | | |
| Propagation condition | | | TDL-C 300ns 100Hz | | |
| Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | |
| Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | |
| Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | |
| Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1. | | | | | |
| Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. | | | | | |
| Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG. | | | | | |
| Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs. | | | | | |
| Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.1.7.1-1. | | | | | |
| Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is [A.3.6]. | | | | | |

Table A.4.5.1.7.1-3A: Void**Table A.4.5.1.7.1-4: Void****Table A.4.5.1.7.1-5: Void****Table A.4.5.1.7.1-6: Void**

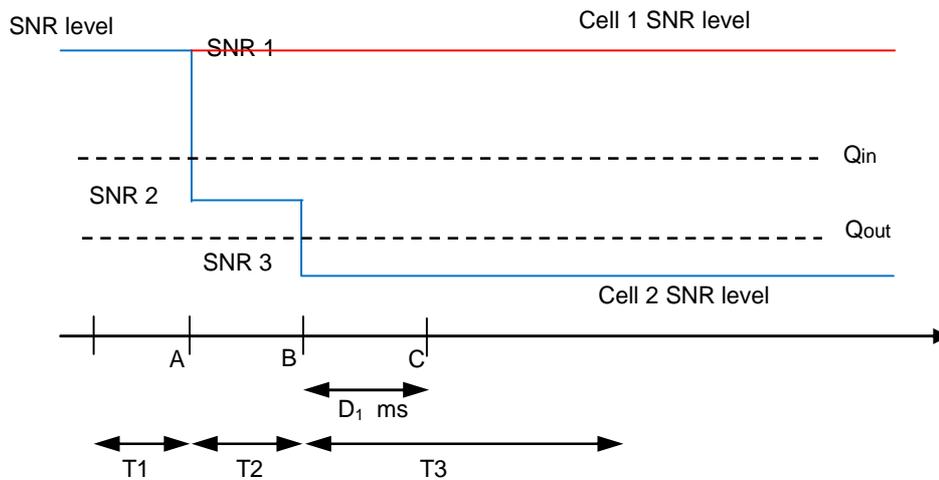


Figure A.4.5.1.7.1-1: SNR variation for CSI-RS out-of-sync testing

A.4.5.1.7.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 (PSCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

The UE shall stop transmitting uplink signal in Cell 2 (PSCell) no later than time point C (D_1 after the start of the time duration T3) on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.1.8 EN-DC Radio Link Monitoring In-sync Test for FR1 PSCell configured with CSI-RS-based RLM in DRX mode

A.4.5.1.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when no DRX is used. This test will partly verify the FR1 PSCell CSI-RS In-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.4.5.1.8.1-1, A.4.5.1.8.1-2, A.4.5.1.8.1-3 and A.4.5.1.8.1-3A below. There are two cells, cell 1 which is the E-UTRAN PCell, and cell 2 is the NR PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.1.8.1-1 shows the variation of the downlink SNR in the PSCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms). In the test, SSB0 is configured as the BFD-RS.

Table A.4.5.1.8.1-1: Supported test configurations for FR1 PSCell

| Configuration | Description |
|---------------|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |

Note: The UE is only required to pass in one of the supported test configurations in FR1

Table A.4.5.1.8.1-2: General test parameters for FR1 PSCell for CSI-RS in-sync testing in DRX mode

| Parameter | | Unit | Value Test 1 |
|--|-------------------------|------|----------------------------|
| Active E-UTRA PCell | | | Cell 1 |
| E-UTRA RF Channel Number | | | 1 |
| Active PSCell | | | Cell 2 |
| RF Channel Number | | | 2 |
| Duplex mode | Config 1, 4 | | FDD |
| | Config 2, 3, 5, 6 | | TDD |
| TDD Configuration | Config 1, 4 | | Not Applicable |
| | Config 2, 5 | | TDDConf.1.1 |
| | Config 3, 6 | | TDDConf.2.1 |
| DL initial BWP configuration | Config 1, 2, 3, 4, 5, 6 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1, 2, 3, 4, 5, 6 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1, 2, 3, 4, 5, 6 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1, 2, 3, 4, 5, 6 | | ULBWP.1.1 |
| RMC CORESET Reference Channel | Config 1, 4 | | CCR.1.1 FDD |
| | Config 2, 5 | | CCR.1.1 TDD |
| | Config 3, 6 | | CCR.2.1 TDD |
| SSB Configuration | Config 1, 4 | | SSB.1 FR1 |
| | Config 2, 5 | | SSB.1 FR1 |
| | Config 3, 6 | | SSB.2 FR1 |
| SMTTC Configuration | Config 1, 2, 4, 5 | | SMTTC.1 |
| | Config 3, 6 | | SMTTC.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2, 4, 5 | | 15 KHz |
| | Config 3, 6 | | 30 KHz |
| TRS configuration | Config 1, 4 | | TRS.1.1 FDD |
| | Config 2, 5 | | TRS.1.1 TDD |
| | Config 3, 6 | | TRS.1.2 TDD |
| CSI-RS for RLM | Config 1, 4 | | Resource #4 in TRS.1.1 FDD |
| | Config 2, 5 | | Resource #4 in TRS.1.1 TDD |
| | Config 3, 6 | | Resource #4 in TRS.1.2 TDD |
| TCI configuration for PDCCH/PDSCH | | | TCI.State.0 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| Correlation Matrix and Antenna Configuration | | | 2x2 Low |

| | | | |
|---|---|-----|-----------------|
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| In sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 4 |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| DRX | | | DRX.3 |
| Gap pattern ID | | | gp0 |
| Layer 3 filtering | | | Enabled |
| T310 timer | ms | | 2000 |
| T311 timer | ms | | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |
| CSI-RS for reporting | Config 1, 4 | | CSI-RS.1.1 FDD |
| | Config 2, 5 | | CSI-RS.1.1 TDD |
| | Config 3, 6 | | CSI-RS.2.1 TDD |
| T1 | s | | 0.2 |
| T2 | s | | 0.2 |
| T3 | s | | 1.24 |
| T4 | s | | 0.2 |
| T5 | s | | 1.88 |
| T6 | s | | 1.84 |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | |
| Note 2: E-UTRAN is in non-DRX mode under test. | | | |

Table A.4.5.1.8.1-3: Cell specific test parameters for FR1 for CSI-RS in-sync radio link monitoring in DRX mode

| Parameter | Unit | Test 1 | | | | |
|-----------|------|--------|----|----|----|----|
| | | T1 | T2 | T3 | T4 | T5 |
| | | | | | | |

| | | | | | | | |
|--|-------------|-----------|-------------------|----|-----|------|---|
| PDCCH_beta | | dB | 4 | | | | |
| PDCCH_DMRS_beta | | dB | 4 | | | | |
| PBCH_beta | | dB | 0 | | | | |
| PSS_beta | | dB | | | | | |
| SSS_beta | | dB | | | | | |
| PDSCH_beta | | dB | | | | | |
| OCNG_beta | | dB | | | | | |
| SNR on RLM-RS | Config 1, 4 | dB | 1 | -7 | -15 | -4.5 | 1 |
| | Config 2, 5 | | 1 | -7 | -15 | -4.5 | 1 |
| | Config 3, 6 | | 1 | -7 | -15 | -4.5 | 1 |
| SNR on other channels and signals | Config 1, 4 | dB | 1 | | | | |
| | Config 2, 5 | | 1 | | | | |
| | Config 3, 6 | | 1 | | | | |
| N_{oc} | Config 1, 4 | dBm/15KHz | -98 | | | | |
| | Config 2, 5 | | -98 | | | | |
| | Config 3, 6 | | -98 | | | | |
| Propagation condition | | | TDL-C 300ns 100Hz | | | | |
| <p>Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.</p> <p>Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.</p> <p>Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.</p> <p>Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.</p> <p>Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.</p> <p>Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.</p> <p>Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.4.5.1.8.1-1.</p> <p>Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is [A.3.6].</p> | | | | | | | |

Table A.4.5.1.8.1-3A: Measurement gap configuration for FR1 CSI-RS in-sync radio link monitoring in DRX mode

| Field | Test 1 |
|--|--------|
| | Value |
| gapOffset | 0 |
| Note 1: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned. | |

Table A.4.5.1.8.1-4: Void

Table A.4.5.1.8.1-5: Void

Table A.4.5.1.8.1-6: Void

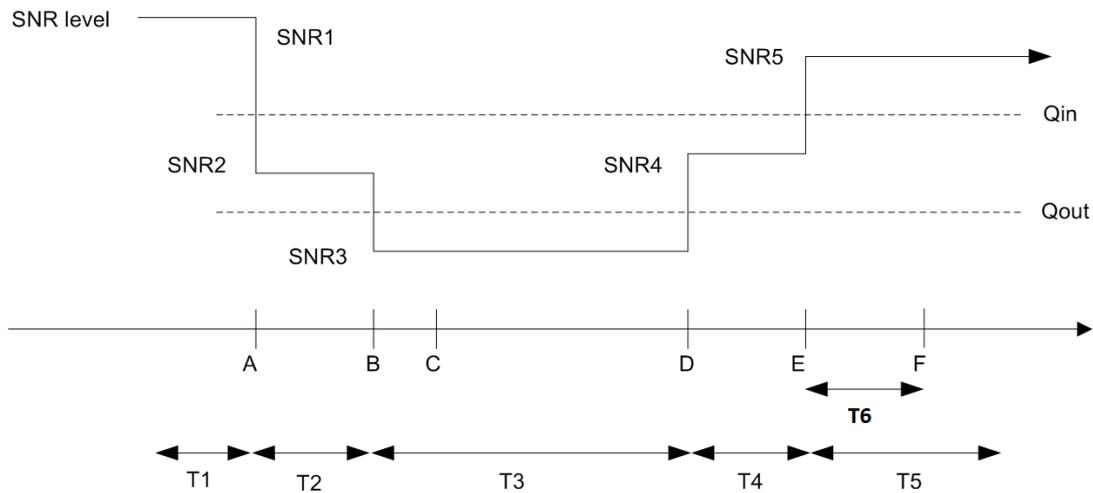


Figure A.4.5.1.8.1-1: SNR variation for CSI-RS in-sync testing

A.4.5.1.8.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2 Interruption

A.4.5.2.1 E-UTRAN – NR FR1 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

A.4.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that when LTE PCell is in DRX and NR PSCell is in non-DRX, NR PSCell interruptions due to transitions from active to non-active and from non-active to active during LTE PCell DRX the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for NR PSCell in EN-DC specified in TS38.133 clause 8. 2.1.2. Supported test configurations are shown in table A.4.5.2.1.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.1.1-2 and A.4.5.2.1.1-3. The E-UTRAN PCell DRX configuration parameters are given in Table A.4.5.2.1.1-4 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1. In the test there are two cells: Cell1 and Cell2. Cell1 is LTE PCell and Cell2 is NR FR1 PSCell. The test consists of one time period, with duration of T1. During T1, NR PSCell is continuously scheduled in DL while LTE PCell is not scheduled and has DRX configured. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell1 and Cell2. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. Prior to start of T1 the DRX inactivity timer for the LTE PCell has already expired. During T1 the UE shall be continuously scheduled on NR PSCell while not scheduled on LTE PCell. CORESET indicating a new transmission on PSCell shall be sent continuously during the entire time duration to ensure UE would not enter DRX state on PSCell.

Table A.4.5.2.1.1-1: Interruption at transitions between active and non-active during DRX supported test configurations

| Config | Description |
|--------|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |

Note: The UE is only required to be tested in one of the supported test configurations

Table A.4.5.2.1.1-2: General test parameters for E-UTRAN – NR FR1 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

| Parameter | Unit | Value | Comment |
|----------------------------|------|--------|--|
| RF Channel Number | | 1, 2 | One is E-UTRAN RF channel and the other is NR RF channel |
| Active PCell | | Cell1 | PCell on E-UTRAN RF channel number 1. |
| Configured PSCell | | Cell2 | PSCell on NR RF channel number 2. |
| CP length | | Normal | Applicable to Cell1 and Cell2 |
| DRX | | DRX.4 | DRX related parameters are defined in Table A.3.3.4-1 |
| Measurement gap pattern Id | | OFF | |
| T1 | s | 10 | |

Table A.4.5.2.1.1-3: NR cell specific test parameters for E-UTRAN – NR FR1 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

| Parameter | Unit | Cell2 |
|-------------------------------------|----------------|-----------------------------|
| Frequency Range | | FR1 |
| Duplex mode | Config 1,4 | FDD |
| | Config 2,3,5,6 | TDD |
| TDD configuration | Config 1,4 | Not Applicable |
| | Config 2,5 | TDDConf.1.1 |
| | Config 3,6 | TDDConf.2.1 |
| BW _{channel} | Config 1,4 | 10: N _{RB,c} = 52 |
| | Config 2,5 | 10: N _{RB,c} = 52 |
| | Config 3,6 | 40: N _{RB,c} = 106 |
| Initial BWP Configuration | Config 1,4 | DLBWP.0 |
| | Config 2,5 | DLBWP.0 |
| | Config 3,6 | DLBWP.0 |
| PDSCH Reference measurement channel | Config 1,4 | SR.1.1 FDD |
| | Config 2,5 | SR.1.1 TDD |
| | Config 3,6 | SR.2.1 TDD |
| RMSI CORESET parameters | Config 1,4 | CR.1.1 FDD |
| | Config 2,5 | CR.1.1 TDD |
| | Config 3,6 | CR.2.1 TDD |
| PDCCH CORESET parameters | Config 1,4 | CCR.1.1 FDD |
| | Config 2,5 | CCR.1.1 TDD |

| | | | |
|--|----------------|--------------|-------------|
| | Config 3,6 | | CCR.2.1 TDD |
| OCNG Patterns | | | OP.1 |
| SMTC Configuration | | | SMTC.1 |
| TRS configuration | Config 1,4 | | TRS.1.1 FDD |
| | Config 2,5 | | TRS.1.1 TDD |
| | Config 3,6 | | TRS.1.2 TDD |
| SSB Configuration | Config 1,2,4,5 | | SSB.1 FR1 |
| | Config 3,6 | | SSB.2 FR1 |
| Correlation Matrix and Antenna Configuration | | | 1x2 Low |
| EPRE ratio of PSS to SSS | | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | |
| $N_{oc}^{Note 2}$ | | dBm/15 kHz | -104 |
| SS-RSRP ^{Note 3} | | dBm/15 kHz | -87 |
| \hat{E}_s/I_{ot} | | dB | 17 |
| \hat{E}_s/N_{oc} | | dB | 17 |
| I_o^{Note3} | Config 1,2,4,5 | dBm/9.36MHz | -58.96 |
| | Config 3,6 | dBm/38.16MHz | -52.86 |
| Time offset to Cell1 ^{Note 4} | | μ s | 33 |
| Propagation Condition | | | AWGN |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells</p> | | | |

Table A.4.5.2.1.1-4: Void

A.4.5.2.1.2 Test Requirements

The UE shall be continuously scheduled in NR PSCell during the entire length of T1. UE shall not be scheduled in LTE PCell during T1. During the time duration T1 the UE shall transmit at least 99% of ACK/NACK on NR PSCell.

Interruption on NR PSCell shall not exceed X as defined in Table A.4.5.2.1.2-1.

Table A.4.5.2.1.2-1: Interruption length X at transition between active and non-active during DRX

| μ | NR Slot length (ms) | Interruption length X |
|-------|---------------------|-----------------------|
| | | Sync |
| 0 | 1 | 1 |
| 1 | 0.5 | 1 |

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.2 E-UTRAN – NR FR1 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

A.4.5.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that when LTE PCell is in DRX and NR PSCell is in non-DRX, NR PSCell interruptions due to transitions from active to non-active and from non-active to active during LTE PCell DRX the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for NR PSCell in EN-DC specified in TS 38.133 clause 8.2.1.2. Supported test configurations are shown in table A.4.5.2.2.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.2.1-2 and A.4.5.2.2.1-3. The E-UTRAN PCell DRX configuration parameters are given in Table A.4.5.2.2.1-4 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1. In the test there are two cells: Cell1 and Cell2. Cell1 is LTE PCell and Cell2 is NR FR1 PSCell. The test consists of one time period, with duration of T1. During T1, NR PSCell is continuously scheduled in DL while LTE PCell is not scheduled and has DRX configured. Prior to the start of the time duration T1, Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. Prior to start of T1 the DRX inactivity timer for the LTE PCell has already expired. During T1 the UE shall be continuously scheduled on NR PSCell while not scheduled on LTE PCell. PDCCH indicating a new transmission on PSCell shall be sent continuously during the entire time duration to ensure UE would not enter DRX state on PSCell.

Table A.4.5.2.2.1-1: Interruption at transitions between active and non-active during DRX supported test configurations

| Config | Description |
|--------|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |

Note: The UE is only required to be tested in one of the supported test configurations

Table A.4.5.2.2.1-2: General test parameters for E-UTRAN – NR FR1 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

| Parameter | Unit | Value | Comment |
|----------------------------|------|--------|--|
| RF Channel Number | | 1, 2 | One is E-UTRAN RF channel and the other is NR RF channel |
| Active PCell | | Cell1 | PCell on E-UTRAN RF channel number 1. |
| Configured PSCell | | Cell2 | PSCell on NR RF channel number 2. |
| CP length | | Normal | Applicable to Cell1 and Cell2 |
| DRX | | DRX.6 | DRX related parameters are defined in Table A.3.3.6-1 |
| Measurement gap pattern Id | | OFF | |
| T1 | s | 10 | |

Table A.4.5.2.2.1-3: NR cell specific test parameters for E-UTRAN – NR FR1 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

| Parameter | Unit | Cell2 |
|-------------------------------------|----------------|-----------------------------|
| Frequency Range | | FR1 |
| Duplex mode | Config 1,4 | FDD |
| | Config 2,3,5,6 | TDD |
| TDD configuration | Config 1,4 | Not Applicable |
| | Config 2,5 | TDDConf.1.1 |
| | Config 3,6 | TDDConf.2.1 |
| BW _{channel} | Config 1,4 | 10: N _{RB,c} = 52 |
| | Config 2,5 | 10: N _{RB,c} = 52 |
| | Config 3,6 | 40: N _{RB,c} = 106 |
| Initial BWP Configuration | Config 1,4 | DLBWP.0 |
| | Config 2,5 | DLBWP.0 |
| | Config 3,6 | DLBWP.0 |
| PDSCH Reference measurement channel | Config 1,4 | SR.1.1 FDD |
| | Config 2,5 | SR.1.1 TDD |
| | Config 3,6 | SR.2.1 TDD |
| RMSI CORESET parameters | Config 1,4 | CR.1.1 FDD |
| | Config 2,5 | CR.1.1 TDD |
| | Config 3,6 | CR.2.1 TDD |
| PDCCH CORESET parameters | Config 1,4 | CCR.1.1 FDD |
| | Config 2,5 | CCR.1.1 TDD |
| | Config 3,6 | CCR.2.1 TDD |
| OCNG Patterns | | OP.1 |
| SMTTC Configuration | | SMTTC.1 |
| TRS configuration | Config 1,4 | TRS.1.1 FDD |
| | Config 2,5 | TRS.1.1 TDD |
| | Config 3,6 | TRS.1.2 TDD |
| SSB Configuration | Config 1,2,4,5 | SSB.1 FR1 |
| | Config 3,6 | SSB.2 FR1 |

| | | | |
|--|----------------|--------------|---------|
| Correlation Matrix and Antenna Configuration | | | 1x2 Low |
| EPRE ratio of PSS to SSS | | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | |
| N_{oc} ^{Note 2} | | dBm/15 kHz | -104 |
| SS-RSRP ^{Note 3} | | dBm/15 kHz | -87 |
| \hat{E}_s/I_{ot} | | dB | 17 |
| \hat{E}_s/N_{oc} | | dB | 17 |
| I_o ^{Note 3} | Config 1,2,4,5 | dBm/9.36MHz | -58.96 |
| | Config 3,6 | dBm/38.16MHz | -52.86 |
| Time offset to Cell1 ^{Note 4} | | μ s | 500 |
| Propagation Condition | | | AWGN |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells</p> | | | |

Table A.4.5.2.2.1-4: Void

A.4.5.2.2.2 Test Requirements

The UE shall be continuously scheduled in NR PSCell during the entire length of T1. UE shall not be scheduled in LTE PCell during T1. During the time duration T1 the UE shall transmit at least 99% of ACK/NACK on NR PSCell.

Interruption on NR PSCell shall not exceed X as defined in Table A.4.5.2.2.2-1.

Table A.4.5.2.2.2-1: Interruption length X at transition between active and non-active during DRX

| μ | NR Slot length (ms) | Interruption length X |
|-------|---------------------|-----------------------|
| | | Async |
| | | |

| | | |
|---|-----|---|
| 0 | 1 | 2 |
| 1 | 0.5 | 2 |

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.3 E-UTRAN – NR FR1 interruptions during measurements on deactivated NR SCC in synchronous EN-DC

A.4.5.2.3.1 Test Purpose and Environment

The purpose of this test is to verify E-UTRAN PCell and NR PSCell interruptions during the measurement on the deactivated NR SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for E-UTRAN PCell and NR PSCell in EN-DC specified in TS 38.133 clause 8.2.1.2. Supported test configurations are shown in table A.4.5.2.3.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.3.1-2 and A.4.5.2.3.1-3 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 is LTE PCell, Cell2 and Cell3 is NR PSCell and NR deactivated SCell. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. The point in time at which the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated NR SCells is received at the UE antenna connector, defines the start of time period T1. During T1, LTE PCell and NR PSCell are continuously scheduled in DL.

Table A.4.5.2.3.1-1: Interruptions during measurements on deactivated NR SCC supported test configurations

| Config | Description |
|--------|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |

Note: The UE is only required to be tested in one of the supported test configurations

Table A.4.5.2.3.1-2: General test parameters for E-UTRAN – NR interruptions during measurements on deactivated NR SCC in synchronous EN-DC

| Parameter | Unit | Value | Comment |
|---|------|---------|--|
| RF Channel Number | | 1, 2, 3 | One is E-UTRAN RF channel and the other two are NR RF channels |
| Active PCell | | Cell1 | PCell on E-UTRAN RF channel number 1. |
| Active PSCell | | Cell2 | PSCell on NR RF channel number 2. |
| Configured deactivated SCell | | Cell3 | Deactivated SCell on NR RF channel number 3. |
| CP length | | Normal | Applicable to Cell1, Cell2 and Cell3 |
| DRX | | OFF | |
| Measurement gap pattern Id | | OFF | |
| SCell measurement cycle (<i>measCycleSCell</i>) | ms | 640 | |
| T1 | s | 10 | |

Table A.4.5.2.3.1-3: NR cell specific test parameters for E-UTRAN – NR interruptions during measurements on deactivated NR SCC in synchronous EN-DC

| Parameter | | Unit | Cell2 | Cell3 |
|-------------------------------------|----------------|------|-----------------------------|-----------------------------|
| Frequency Range | | | FR1 | FR1 |
| Duplex mode | Config 1,4 | | FDD | FDD |
| | Config 2,3,5,6 | | TDD | TDD |
| TDD configuration | Config 1,4 | | Not Applicable | Not Applicable |
| | Config 2,5 | | TDDConf.1.1 | TDDConf.1.1 |
| | Config 3,6 | | TDDConf.2.1 | TDDConf.2.1 |
| BW _{channel} | Config 1,4 | | 10: N _{RB,c} = 52 | 10: N _{RB,c} = 52 |
| | Config 2,5 | | 10: N _{RB,c} = 52 | 10: N _{RB,c} = 52 |
| | Config 3,6 | | 40: N _{RB,c} = 106 | 40: N _{RB,c} = 106 |
| Initial DL BWP Configuration | Config 1,4 | | DLBWP.0.1 | DLBWP.0.1 |
| | Config 2,5 | | DLBWP.0.1 | DLBWP.0.1 |
| | Config 3,6 | | DLBWP.0.1 | DLBWP.0.1 |
| Dedicated DL BWP Configuration | Config 1,4 | | DLBWP.1.1 | DLBWP.1.1 |
| | Config 2,5 | | DLBWP.1.1 | DLBWP.1.1 |
| | Config 3,6 | | DLBWP.1.1 | DLBWP.1.1 |
| Initial UL BWP Configuration | Config 1,4 | | ULBWP.0.1 | ULBWP.0.1 |
| | Config 2,5 | | ULBWP.0.1 | ULBWP.0.1 |
| | Config 3,6 | | ULBWP.0.1 | ULBWP.0.1 |
| Dedicated UL BWP Configuration | Config 1,4 | | ULBWP.1.1 | ULBWP.1.1 |
| | Config 2,5 | | ULBWP.1.1 | ULBWP.1.1 |
| | Config 3,6 | | ULBWP.1.1 | ULBWP.1.1 |
| PDSCH Reference measurement channel | Config 1,4 | | SR.1.1 FDD | - |
| | Config 2,5 | | SR.1.1 TDD | - |
| | Config 3,6 | | SR.2.1 TDD | - |
| RMSI CORESET parameters | Config 1,4 | | CR.1.1 FDD | CR.1.1 FDD |
| | Config 2,5 | | CR.1.1 TDD | CR.1.1 TDD |
| | Config 3,6 | | CR.2.1 TDD | CR.2.1 TDD |
| PDCCH CORESET parameters | Config 1,4 | | CCR.1.1 FDD | CCR.1.1 FDD |
| | Config 2,5 | | CCR.1.1 TDD | CCR.1.1 TDD |
| | Config 3,6 | | CCR.2.1 TDD | CCR.2.1 TDD |
| TRS configuration | Config 1,4 | | TRS.1.1 FDD | TRS.1.1 FDD |
| | Config 2,5 | | TRS.1.1 TDD | TRS.1.1 TDD |
| | Config 3,6 | | TRS.1.2 TDD | TRS.1.2 TDD |
| OCNG Patterns | | | OP.1 | OP.1 |
| SMTC Configuration | | | SMTC.1 | SMTC.1 |
| TCI state | | | TCI.State.0 | TCI.State.0 |
| SSB Configuration | Config 1,2,4,5 | | SSB.1 FR1 | SSB.1 FR1 |
| | Config 3,6 | | SSB.2 FR1 | SSB.2 FR1 |

| Correlation Matrix and Antenna Configuration | | | 1x2 Low | 1x2 Low |
|--|----------------|--------------|---------|---------|
| EPRE ratio of PSS to SSS | | dB | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | |
| N_{oc} ^{Note 2} | | dBm/15 kHz | -104 | -104 |
| SS-RSRP ^{Note 3} | | dBm/15 kHz | -87 | -87 |
| \hat{E}_s/I_{ot} | | dB | 17 | 17 |
| \hat{E}_s/N_{oc} | | dB | 17 | 17 |
| I_o ^{Note 3} | Config 1,2,4,5 | dBm/9.36MHz | -58.96 | -58.96 |
| | Config 3,6 | dBm/38.16MHz | -52.86 | -52.86 |
| Time offset to Cell1 ^{Note 4} | | μ s | 33 | 33 |
| Time offset to Cell2 ^{Note 5} | | μ s | - | 3 |
| Propagation Condition | | | AWGN | AWGN |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells</p> <p>Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.</p> | | | | |

A.4.5.2.3.2 Test Requirements

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table A.4.5.2.3.2-1 if the NR PSCell is not in the same band as the deactivated SCell or Table A.4.5.2.3.2-2 if the NR PSCell is in the same band as the deactivated SCell.

Table A.4.5.2.3.2-1: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

| μ | NR Slot length (ms) | Interruption length |
|-------|---------------------|---------------------|
| 0 | 1 | 1 |
| 1 | 0.5 | 1 |

Table A.4.5.2.3.2-2: Interruption duration if the NR PSCell is in the same band as the deactivated SCell

| μ | NR Slot length (ms) | Interruption length |
|-------|---------------------|---------------------|
| 0 | 1 | 1 + SMTC duration |
| 1 | 0.5 | 1 + SMTC duration |

Each interruption on E-UTRAN PCell shall not exceed 1ms + SMTC duration subframes for intraband EN-DC, 1 subframe for synchronous interband EN-DC.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.4 E-UTRAN – NR FR1 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

A.4.5.2.4.1 Test Purpose and Environment

The purpose of this test is to verify E-UTRAN PCell and NR PSCell interruptions during the measurement on the deactivated NR SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for E-UTRAN PCell and NR PSCell in EN-DC specified in TS 38.133 clause 8.2.1. Supported test configurations are shown in table A.4.5.2.4.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.4.1-2 and A.4.5.2.4.1-3 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 is LTE PCell, Cell2 and Cell3 is NR PSCell and NR deactivated SCell. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. The point in time at which the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated NR SCells is received at the UE antenna connector, defines the start of time period T1. During T1, LTE PCell and NR PSCell are continuously scheduled in DL.

Table A.4.5.2.4.1-1: Interruptions during measurements on deactivated NR SCC supported test configurations

| Config | Description |
|--------|--|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.4.5.2.4.1-2: General test parameters for E-UTRAN – NR interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

| Parameter | Unit | Value | Comment |
|--|------|---------|--|
| RF Channel Number | | 1, 2, 3 | One is E-UTRAN RF channel and the other two are NR RF channels |
| Active PCell | | Cell1 | PCell on E-UTRAN RF channel number 1. |
| Configured PSCell | | Cell2 | PSCell on NR RF channel number 2. |
| Configured deactivated SCell | | Cell3 | Deactivated SCell on NR RF channel number 3. |
| CP length | | Normal | Applicable to Cell1, Cell2 and Cell3 |
| DRX | | OFF | |
| Measurement gap pattern Id | | OFF | |
| SCell measurement cycle (measCycleSCell) | ms | 640 | |
| T1 | s | 10 | |

Table A.4.5.2.4.1-3: NR cell specific test parameters for E-UTRAN – NR interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

| Parameter | | Unit | Cell2 | Cell3 |
|--|----------------|------------|-----------------------------|-----------------------------|
| Frequency Range | | | FR1 | FR1 |
| Duplex mode | Config 1,4 | | FDD | FDD |
| | Config 2,3,5,6 | | TDD | TDD |
| TDD configuration | Config 1,4 | | Not Applicable | Not Applicable |
| | Config 2,5 | | TDDConf.1.1 | TDDConf.1.1 |
| | Config 3,6 | | TDDConf.2.1 | TDDConf.2.1 |
| BW _{channel} | Config 1,4 | | 10: N _{RB,c} = 52 | 10: N _{RB,c} = 52 |
| | Config 2,5 | | 10: N _{RB,c} = 52 | 10: N _{RB,c} = 52 |
| | Config 3,6 | | 40: N _{RB,c} = 106 | 40: N _{RB,c} = 106 |
| Initial BWP Configuration | Config 1,4 | | DLBWP.0.1 | DLBWP.0.1 |
| | Config 2,5 | | DLBWP.0.1 | DLBWP.0.1 |
| | Config 3,6 | | DLBWP.0.1 | DLBWP.0.1 |
| Dedicated DL BWP Configuration | Config 1,4 | | DLBWP.1.1 | DLBWP.1.1 |
| | Config 2,5 | | DLBWP.1.1 | DLBWP.1.1 |
| | Config 3,6 | | DLBWP.1.1 | DLBWP.1.1 |
| Initial UL BWP Configuration | Config 1,4 | | ULBWP.0.1 | ULBWP.0.1 |
| | Config 2,5 | | ULBWP.0.1 | ULBWP.0.1 |
| | Config 3,6 | | ULBWP.0.1 | ULBWP.0.1 |
| Dedicated UL BWP Configuration | Config 1,4 | | ULBWP.1.1 | ULBWP.1.1 |
| | Config 2,5 | | ULBWP.1.1 | ULBWP.1.1 |
| | Config 3,6 | | ULBWP.1.1 | ULBWP.1.1 |
| PDSCH Reference measurement channel | Config 1,4 | | SR.1.1 FDD | - |
| | Config 2,5 | | SR.1.1 TDD | - |
| | Config 3,6 | | SR.2.1 TDD | - |
| RMSI CORESET parameters | Config 1,4 | | CR.1.1 FDD | CR.1.1 FDD |
| | Config 2,5 | | CR.1.1 TDD | CR.1.1 TDD |
| | Config 3,6 | | CR.2.1 TDD | CR.2.1 TDD |
| PDCCH CORESET parameters | Config 1,4 | | CCR.1.1 FDD | CCR.1.1 FDD |
| | Config 2,5 | | CCR.1.1 TDD | CCR.1.1 TDD |
| | Config 3,6 | | CCR.2.1 TDD | CCR.2.1 TDD |
| TRS configuration | Config 1,4 | | TRS.1.1 FDD | TRS.1.1 FDD |
| | Config 2,5 | | TRS.1.1 TDD | TRS.1.1 TDD |
| | Config 3,6 | | TRS.1.2 TDD | TRS.1.2 TDD |
| OCNG Patterns | | | OP.1 | OP.1 |
| SSB Configuration | Config 1,2,4,5 | | SSB.1 FR1 | SSB.1 FR1 |
| | Config 3,6 | | SSB.2 FR1 | SSB.2 FR1 |
| SMTc Configuration | | | SMTc.1 | SMTc.1 |
| TCI state | | | TCI.State.0 | TCI.State.0 |
| Correlation Matrix and Antenna Configuration | | | 1x2 Low | 1x2 Low |
| EPRE ratio of PSS to SSS | | dB | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | |
| N _{oc} ^{Note 2} | | dBm/15 kHz | -104 | -104 |
| SS-RSRP ^{Note 3} | | dBm/15 kHz | -87 | -87 |
| \hat{E}_s/I_{ot} | | dB | 17 | 17 |
| \hat{E}_s/N_{oc} | | dB | 17 | 17 |

| | | | | |
|--|----------------|------------------|--------|--------|
| I _o ^{Note3} | Config 1,2,4,5 | dBm/ 9.36MHz | -58.96 | -58.96 |
| | Config 3,6 | dBm/ 38.16MHz | -52.86 | -52.86 |
| Time offset to Cell1 ^{Note 4} | | ms | 3 | 3 |
| Time offset to Cell2 ^{Note 5} | | μs | - | 3 |
| Propagation Condition | | | AWGN | AWGN |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells</p> <p>Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.</p> | | | | |

A.4.5.2.4.2 Test Requirements

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table A.4.5.2.4.2-1 and Table A.4.5.2.4.2-2.

Table A.4.5.2.4.2-1: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

| μ | NR Slot length (ms) | Interruption length |
|-------|---------------------|---------------------|
| 0 | 1 | 1 |
| 1 | 0.5 | 1 |

Table A.4.5.2.4.2-2: Interruption duration if the NR PSCell is in the same band as the deactivated SCell

| μ | NR Slot length (ms) | Interruption length |
|-------|---------------------|---------------------|
| 0 | 1 | 1 + SMTC duration |
| 1 | 0.5 | 1 + SMTC duration |

Each interruption on E-UTRAN PCell shall not exceed 1ms + SMTC duration subframes for synchronous intraband EN-DC, or 2 subframes for asynchronous interband EN-DC.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.5 E-UTRAN – NR FR1 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

A.4.5.2.5.1 Test Purpose and Environment

The purpose of this test is to verify E-UTRAN PCell and NR PSCell interruptions during the measurement on the deactivated E-UTRAN SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for E-UTRAN PCell and NR PSCell in EN-DC specified in TS38.133 clause 8. 2.1.2. Supported test configurations are shown in table A.4.5.2.5.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.5.1-2 and A.4.5.2.5.1-3 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 and Cell3 is E-UTRAN PCell and E-UTRAN deactivated SCell, Cell2 is NR FR1 PSCell. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. The point in time at which the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated E-UTRAN SCells is received at the UE antenna connector, defines the start of time period T1. During T1, LTE PCell and NR PSCell are continuously scheduled in DL.

Table A.4.5.2.5.1-1: Interruptions during measurements on deactivated E-UTRAN SCC supported test configurations

| Config | Description |
|--------|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |

Note: The UE is only required to be tested in one of the supported test configurations

Table A.4.5.2.5.1-2: General test parameters for E-UTRAN – NR interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

| Parameter | Unit | Value | Comment |
|--|------|--------|--|
| RF Channel Number | | 1, 2 | One is E-UTRAN RF channel and the other is NR RF channel |
| Active PCell | | Cell1 | PCell on E-UTRAN RF channel number 1. |
| Active PSCell | | Cell2 | PSCell on NR RF channel number 2. |
| Configured deactivated SCell | | Cell3 | Deactivated SCell on E-UTRAN RF channel number 1. |
| CP length | | Normal | Applicable to Cell1, Cell2 and Cell3 |
| DRX | | OFF | |
| Measurement gap pattern Id | | OFF | |
| SCell measurement cycle (measCycleSCell) | ms | 640 | |
| T1 | s | 10 | |

Table A.4.5.2.5.1-3: NR cell specific test parameters for E-UTRAN – NR interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

| Parameter | | Unit | Cell2 |
|-------------------------------------|----------------|------|-----------------------------|
| Frequency Range | | | FR1 |
| Duplex mode | Config 1,4 | | FDD |
| | Config 2,3,5,6 | | TDD |
| TDD configuration | Config 1,4 | | Not Applicable |
| | Config 2,5 | | TDDConf.1.1 |
| | Config 3,6 | | TDDConf.2.1 |
| BW _{channel} | Config 1,4 | MHz | 10: N _{RB,c} = 52 |
| | Config 2,5 | | 10: N _{RB,c} = 52 |
| | Config 3,6 | | 40: N _{RB,c} = 106 |
| Initial DL BWP Configuration | Config 1,4 | | DLBWP.0.1 |
| | Config 2,5 | | DLBWP.0.1 |
| | Config 3,6 | | DLBWP.0.1 |
| Dedicated DL BWP Configuration | Config 1,4 | | DLBWP.1.1 |
| | Config 2,5 | | DLBWP.1.1 |
| | Config 3,6 | | DLBWP.1.1 |
| Initial UL BWP Configuration | Config 1,4 | | ULBWP.0.1 |
| | Config 2,5 | | ULBWP.0.1 |
| | Config 3,6 | | ULBWP.0.1 |
| Dedicated UL BWP Configuration | Config 1,4 | | ULBWP.1.1 |
| | Config 2,5 | | ULBWP.1.1 |
| | Config 3,6 | | ULBWP.1.1 |
| PDSCH Reference measurement channel | Config 1,4 | | SR.1.1 FDD |
| | Config 2,5 | | SR.1.1 TDD |
| | Config 3,6 | | SR.2.1 TDD |
| RMSI CORESET parameters | Config 1,4 | | CR.1.1 FDD |
| | Config 2,5 | | CR.1.1 TDD |
| | Config 3,6 | | CR.2.1 TDD |
| PDCCH CORESET parameters | Config 1,4 | | CCR.1.1 FDD |
| | Config 2,5 | | CCR.1.1 TDD |
| | Config 3,6 | | CCR.2.1 TDD |
| TRS configuration | Config 1,4 | | TRS.1.1 FDD |
| | Config 2,5 | | TRS.1.1 TDD |
| | Config 3,6 | | TRS.1.2 TDD |
| OCNG Patterns | | | OP.1 |
| SMTTC Configuration | | | SMTTC.1 |
| TCI state | | | TCI.State.0 |
| SSB Configuration | Config 1,2,4,5 | | SSB.1 FR1 |
| | Config 3,6 | | SSB.2 FR1 |

| | | | |
|--|----------------|--------------|---------|
| Correlation Matrix and Antenna Configuration | | | 1x2 Low |
| EPRE ratio of PSS to SSS | | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | |
| N_{oc} ^{Note 2} | | dBm/15 kHz | -104 |
| SS-RSRP ^{Note 3} | | dBm/15 kHz | -87 |
| \hat{E}_s/I_{ot} | | dB | 17 |
| \hat{E}_s/N_{oc} | | dB | 17 |
| I_o ^{Note 3} | Config 1,2,4,5 | dBm/9.36MHz | -58.96 |
| | Config 3,6 | dBm/38.16MHz | -52.86 |
| Time offset to Cell1 ^{Note 4} | | μ s | 33 |
| Propagation Condition | | | AWGN |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells</p> | | | |

A.4.5.2.5.2 Test Requirements

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed X defined in Table A.4.5.2.5.2-1 if the NR PSCell is not in the same band as the E-UTRAN deactivated SCell or Y in Table A.4.5.2.3.2-1 if the NR PSCell is in the same band as the E-UTRAN deactivated SCell.

Table A.4.5.2.5.2-1: Interruption length X and Y at measurements on deactivated E-UTRA SCC

| μ | NR Slot length (ms) | Interruption length X slot | Interruption length Y slot |
|-------|---------------------|----------------------------|----------------------------|
| | | Sync | |
| 0 | 1 | 1 | 1 |
| 1 | 0.5 | 1 | 1 |

Each interruption on E-UTRAN PCell shall not exceed 1 subframe if the PCell is not in the same band as the deactivated SCell, or 5 subframes if the PCell is in the same band as the deactivated SCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.6 E-UTRAN – NR FR1 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

A.4.5.2.6.1 Test Purpose and Environment

The purpose of this test is to verify E-UTRAN PCell and NR PSCell interruptions during the measurement on the deactivated NR SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for E-UTRAN PCell and NR PSCell in EN-DC specified in TS 38.133 clause 8.2.1. Supported test configurations are shown in table A.4.5.2.6.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.6.1-1 and A.4.5.2.6.1-2 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 and Cell3 is E-UTRAN PCell and E-UTRAN deactivated SCell, Cell2 is NR FR1 PSCell. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. The point in time at which the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated NR SCells is received at the UE antenna connector, defines the start of time period T1. During T1, LTE PCell and NR PSCell are continuously scheduled in DL.

Table A.4.5.2.6.1-1: Interruptions during measurements on deactivated E-UTRAN SCC supported test configurations

| Config | Description |
|--------|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |

Note: The UE is only required to be tested in one of the supported test configurations

Table A.4.5.2.6.1-2: General test parameters for E-UTRAN – NR interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

| Parameter | Unit | Value | Comment |
|--|------|---------|--|
| RF Channel Number | | 1, 2, 3 | One is NR RF channel and the other two are E-UTRAN RF channels |
| Active PCell | | Cell1 | PCell on E-UTRAN RF channel number 1. |
| Configured PSCell | | Cell2 | PSCell on NR RF channel number 2. |
| Configured deactivated SCell | | Cell3 | Deactivated SCell on E-UTRAN RF channel number 3. |
| CP length | | Normal | Applicable to Cell1, Cell2 and Cell3 |
| DRX | | OFF | |
| Measurement gap pattern Id | | OFF | |
| SCell measurement cycle (measCycleSCell) | ms | 640 | |
| T1 | s | 10 | |

Table A.4.5.2.6.1-3: NR cell specific test parameters for E-UTRAN – NR interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

| Parameter | | Unit | Cell2 |
|-------------------------------------|----------------|------|-----------------------------|
| Frequency Range | | | FR1 |
| Duplex mode | Config 1,4 | | FDD |
| | Config 2,3,5,6 | | TDD |
| TDD configuration | Config 1,4 | | Not Applicable |
| | Config 2,5 | | TDDConf.1.1 |
| | Config 3,6 | | TDDConf.2.1 |
| BW _{channel} | Config 1,4 | | 10: N _{RB,c} = 52 |
| | Config 2,5 | | 10: N _{RB,c} = 52 |
| | Config 3,6 | | 40: N _{RB,c} = 106 |
| Initial DL BWP Configuration | Config 1,4 | | DLBWP.0.1 |
| | Config 2,5 | | DLBWP.0.1 |
| | Config 3,6 | | DLBWP.0.1 |
| Dedicated DL BWP Configuration | Config 1,4 | | DLBWP.1.1 |
| | Config 2,5 | | DLBWP.1.1 |
| | Config 3,6 | | DLBWP.1.1 |
| Initial UL BWP Configuration | Config 1,4 | | ULBWP.0.1 |
| | Config 2,5 | | ULBWP.0.1 |
| | Config 3,6 | | ULBWP.0.1 |
| Dedicated UL BWP Configuration | Config 1,4 | | ULBWP.1.1 |
| | Config 2,5 | | ULBWP.1.1 |
| | Config 3,6 | | ULBWP.1.1 |
| PDSCH Reference measurement channel | Config 1,4 | | SR.1.1 FDD |
| | Config 2,5 | | SR.1.1 TDD |
| | Config 3,6 | | SR.2.1 TDD |
| RMSI CORESET parameters | Config 1,4 | | CR.1.1 FDD |
| | Config 2,5 | | CR.1.1 TDD |
| | Config 3,6 | | CR.2.1 TDD |
| PDCCH CORESET parameters | Config 1,4 | | CCR.1.1 FDD |
| | Config 2,5 | | CCR.1.1 TDD |
| | Config 3,6 | | CCR.2.1 TDD |
| TRS configuration | Config 1,4 | | TRS.1.1 FDD |
| | Config 2,5 | | TRS.1.1 TDD |
| | Config 3,6 | | TRS.1.2 TDD |
| OCNG Patterns | | | OP.1 |
| SMTTC Configuration | | | SMTTC.1 |
| TCI state | | | TCI.State.0 |
| SSB Configuration | Config 1,2,4,5 | | SSB.1 FR1 |
| | Config 3,6 | | SSB.2 FR1 |

| | | | |
|--|----------------|--------------|---------|
| Correlation Matrix and Antenna Configuration | | | 1x2 Low |
| EPRE ratio of PSS to SSS | | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | |
| N_{oc} ^{Note 2} | | dBm/15 kHz | -104 |
| SS-RSRP ^{Note 3} | | dBm/15 kHz | -87 |
| \hat{E}_s/I_{ot} | | dB | 17 |
| \hat{E}_s/N_{oc} | | dB | 17 |
| I_o ^{Note 3} | Config 1,2,4,5 | dBm/9.36MHz | -58.96 |
| | Config 3,6 | dBm/38.16MHz | -52.86 |
| Time offset to Cell1 ^{Note 4} | | μ s | 500 |
| Propagation Condition | | | AWGN |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells</p> | | | |

A.4.5.2.6.2 Test Requirements

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on E-UTRAN PCell and NR PSCell. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table A.4.5.2.4.2-1 and Table A.4.5.2.4.2-2.

Table A.4.5.2.6.2-1: Interruption duration if the NR PSCell is not in the same band as the E-UTRAN deactivated SCell

| μ | NR Slot length (ms) | Interruption length |
|-------|---------------------|---------------------|
| 0 | 1 | 2 |
| 1 | 0.5 | 2 |

Table A.4.5.2.6.2-2: Interruption duration if the NR PSCell is in the same band as the E-UTRAN deactivated SCell

| μ | NR Slot length (ms) | Interruption length |
|-------|---------------------|---------------------|
| 0 | 1 | 2 + SMTC duration |
| 1 | 0.5 | 2 + SMTC duration |

Each interruption on E-UTRAN PCell shall not exceed 1 subframe if the PCell is not in the same band as the deactivated SCell, or 5 subframes if the PCell is in the same band as the deactivated SCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.7 Void

A.4.5.3 SCell Activation and Deactivation Delay

A.4.5.3.1 SCell Activation and deactivation of known SCell in FR1 for 160ms SCell measurement cycle

A.4.5.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SCell activation and deactivation times are within the requirements stated in clause 8.3, when the SCell in FR1 is known by the UE at the time of activation.

The supported test configurations are shown in table A.4.5.3.1.1-1 below. The test parameters are given in Tables A.4.5.3.1.1-2 and cell-specific parameters in A.4.5.3.1.1-3 below. The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are three carriers, E-UTRA has one cell, NR has two cells. All cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRA and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 3) becomes configured on NR. The UE now starts monitoring the SCell. The test equipment sends a MAC message for activation of the SCell.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m , defines the start of time period T2. The UE shall be able to report valid CSI in PSCell for the activated SCell at latest in slot $m + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, as defined in clause 8.3. The UE shall start reporting CSI in PSCell in slot $(m+k)$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PSCell interruption due to activation of SCell shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to slot $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in section 8.2. Any E-UTRA PCell interruption due to activation of SCell shall occur in the subframe $m_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{EUTRA slot length}} + N_{\text{interruption}}$, where m_1 and m_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot m , and $N_{\text{interruption}}$ is the interruption length given in TS 36.133 [14] section 7.32.

Time period T3 starts when a MAC message for deactivation of SCell, sent from the test equipment to the UE in a slot # denoted n , is received at the UE antenna connector. The UE shall carry out deactivation of the SCell in a slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3. The starting point of any PSCell interruption due to the deactivation shall occur in the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3. The starting point of any E-

UTRA PCell interruption due to the deactivation shall occur in the subframe $n_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA subframe length}}$ to subframe $n_2 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{EUTRA subframe length}}$, where n_1 and n_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot n .

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PSCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CSI reporting for SCell is discontinued.

Table A.4.5.3.1.1-1: known FR1 SCell activation in non-DRX for 160ms SCell measurement cycle supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |

Note: The UE is only required to be tested in one of the supported test configurations

Table A.4.5.3.1.1-2: General test parameters for known FR1 SCell activation case, 160ms SCell measurement cycle

| Parameter | Unit | Value | Comment |
|--|------|---|---|
| RF Channel Number | | 1,2,3 | One E-UTRAN radio channel (1) and two NR radio channel (2,3) are used for this test |
| Active PCell | | Cell 1 | Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.1 |
| Active PSCell | | Cell 2 | Primary secondary cell on NR RF channel number 2. |
| Configured deactivated SCell | | Cell 3 | Configured deactivated secondary cell on NR RF channel number 3 |
| CP length | | Normal | |
| DRX | | OFF | Continuous monitoring of primary cell |
| CQI/PMI periodicity and offset configuration index | | 0 | CQI reporting for SCell every second subframe |
| Cell-individual offset for cells on E-UTRA RF channel number | dB | 0 | Individual offset for cells on primary component carrier. |
| Cell-individual offset for cells on NR channel number | dB | 0 | Individual offset for cells on secondary component carrier. |
| SCell measurement cycle (measCycleSCell) | ms | 160 | |
| Cell3 timing offset to cell2 | μs | 0 | |
| Time alignment error between cell3 and cell2 | μs | ≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1. | The value of time alignment error depends upon the type of carrier aggregation. |

| | | | |
|-----------------------------|----|--|---|
| T1 | s | 7 | During this time the PSCell shall be known and the SCell configured and detected. |
| T2 | s | 1 | During this time the UE shall activate the SCell. |
| T3 | s | 1 | During this time the UE shall deactivate the SCell. |
| T_{HARQ} | ms | $k_1 \times \text{NR slot length}$ | k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by <i>dl-DataToUL-ACK</i> if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3] |
| $T_{\text{CSI_Reporting}}$ | ms | 2 | the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2] |
| k | ms | $k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe}, \mu} + 1$ | As specified in clause 4.3 of TS 38.213 [3] |

Table A. 4.5.3.1.1-3: Cell specific test parameters for known FR1 SCell activation case, 160ms SCell measurement cycle

| Parameter | | Unit | Cell 2 | | | Cell 3 | | |
|-------------------------------------|-------------------------|------|-----------------------------|----|----|-------------|----|----|
| | | | T1 | T2 | T3 | T1 | T2 | T3 |
| SSB ARFCN | | | freq1 | | | freq2 | | |
| Duplex mode | Config 1,4 | | FDD | | | | | |
| | Config 2,3,5,6 | | TDD | | | | | |
| TDD configuration | Config 1,4 | | Not Applicable | | | | | |
| | Config 2,5 | | TDDConf.1.1 | | | | | |
| | Config 3,6 | | TDDConf.2.1 | | | | | |
| BW_{channel} | Config 1,4 | MHz | 10: $N_{\text{RB},c} = 52$ | | | | | |
| | Config 2,5 | | 10: $N_{\text{RB},c} = 52$ | | | | | |
| | Config 3,6 | | 40: $N_{\text{RB},c} = 106$ | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| DL initial BWP configuration | Config 1, 2, 3, 4, 5, 6 | | DLBWP.0.1 | | | | | |
| DL dedicated BWP configuration | Config 1, 2, 3, 4, 5, 6 | | DLBWP.1.1 | | | | | |
| UL initial BWP configuration | Config 1, 2, 3, 4, 5, 6 | | ULBWP.0.1 | | | | | |
| UL dedicated BWP configuration | Config 1, 2, 3, 4, 5, 6 | | ULBWP.1.1 | | | | | |
| DRx Cycle | | ms | Not Applicable | | | | | |
| PDSCH Reference measurement channel | Config 1,4 | | SR.1.1 FDD | | | SR.1.1 FDD | | |
| | Config 2,5 | | SR.1.1 TDD | | | SR.1.1 TDD | | |
| | Config 3,6 | | SR.2.1 TDD | | | SR.2.1 TDD | | |
| RMSI CORESET Reference Channel | Config 1,4 | | CR.1.1 FDD | | | CR.1.1 FDD | | |
| | Config 2,5 | | CR.1.1 TDD | | | CR.1.1 TDD | | |
| | Config 3,6 | | CR.2.1 TDD | | | CR.2.1 TDD | | |
| RMC CORESET Reference Channel | Config 1,4 | | CCR.1.1 FDD | | | CCR.1.1 FDD | | |
| | Config 2,5 | | CCR.1.1 TDD | | | CCR.1.1 TDD | | |
| | Config 3,6 | | CCR.2.1 TDD | | | CCR.2.1 TDD | | |

| | | | | |
|--|----------------|------------|-------------|-------------|
| TRS configuration | Config 1,4 | | TRS.1.1 FDD | TRS.1.1 FDD |
| | Config 2,5 | | TRS.1.1 TDD | TRS.1.1 TDD |
| | Config 3,6 | | TRS.1.2 TDD | TRS.1.2 TDD |
| OCNG Patterns | | | OP.1 | |
| SMTTC configuration | | | SMTTC.1 | |
| SSB configuration | Config 1,2,4,5 | | SSB.1 FR1 | |
| | Config 3,6 | | SSB.2 FR1 | |
| PDSCH/PDCCH subcarrier spacing | Config 1,2,4,5 | kHz | 15 kHz | |
| | Config 3,6 | | 30kHz | |
| EPRE ratio of PSS to SSS | | dB | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | |
| N_{oc} Note2 | | | | |
| N_{oc} Note2 | Config 1,2,4,5 | dBm/SCS | -104 | |
| | Config 3,6 | | -101 | |
| \hat{E}_s / I_{ot} | | dB | 17 | |
| \hat{E}_s / N_{oc} | | dB | 17 | |
| SS-RSRP ^{Note3} | Config 1,2,4,5 | dBm/SCS | -87 | |
| | Config 3,6 | | -84 | |
| SCH_RP ^{Note 3} | | dBm/15 kHz | -87 | |
| Propagation condition | | - | AWGN | |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | |
| Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | |
| Note 3: SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | |
| Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.] | | | | |

A.4.5.3.1.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in slot $(m+k)$, or in slot $m + 1 + \frac{T_{HARQ} + 3ms + T_x}{NR\ slot\ length} + N_{interruption} + 1$ as defined in clause 8.3 if slot $(m+k)$ was subject to interruption. Whether CSI report in slot $(m+k)$ was interrupted is checked by monitoring ACK/NACK sent in PCell in slot $(m+k)$.

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot $m + \frac{T_{HARQ} + T_{activation_time} + T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time} = T_{FirstSSB} + 5ms$, as defined in clause 8.3.

During T3 the UE shall stop sending CSI reports for SCell at latest in a slot $n + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.

During T2 interruption of PSCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_X}{\text{NR slot length}} + N_{\text{interruption}}$, and interruption of E-UTRA PCell during SCell activation shall not happen outside the subframe $m_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_X}{\text{EUTRA slot length}} + N_{\text{interruption}}$, as defined in clause 8.3.

During T3 the starting point of interruption of PSCell during SCell deactivation shall not happen outside the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3 and the starting point of interruption of E-UTRA PCell during SCell deactivation shall not happen outside the subframe $n_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA subframe length}}$ to subframe $n_2 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{EUTRA subframe length}}$.

The interruption of PSCell shall not be more than the values specified for EN-DC in Clause 8.2.1.2.4.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $m + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$ as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.4.5.3.2 SCell Activation and deactivation of known SCell in FR1 for 320 ms SCell measurement cycle

A.4.5.3.2.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.4.5.3.1.1. The supported test configurations are the same as defined in clause A.4.5.3.1.1. The test parameters are the same except those described in the following clause. The listed parameter values in Tables A.4.5.3.2.1-1 will replace the values of corresponding parameters in Tables A.4.5.3.1.1-2.

Table A.4.5.3.2.1-1: General test parameters for known FR1 SCell activation case, 320 ms SCell measurement cycle

| Parameter | Unit | Value | Comment |
|--|------|-------|---------|
| SCell measurement cycle (measCycleSCell) | ms | 320 | |

A.4.5.3.2.2 Test Requirements

The test requirements defined in clause A.4.5.3.1.2 shall apply to this test case, except $T_{\text{activation_time}}$ will be replaced with the value $T_{\text{FirstSSB_MAX}} + T_{\text{rs}} + 5\text{ms}$.

A.4.5.3.3 SCell Activation and deactivation of unknown SCell in FR1

A.4.5.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the SCell activation and deactivation times are within the requirements stated in clause 8.3, when the SCell in FR1 is unknown by the UE at the time of activation.

The supported test configurations are the same as defined in clause A.4.5.3.1.1. The test parameters are the same except those described in the following clause. The listed parameter values in Tables A.4.5.3.1-1 will replace the values of corresponding parameters in Tables A.4.5.3.1-2. The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are three carriers, E-UTRA has one cell, NR has two cells. Cell 1 and Cell 2 have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRAN and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 3) becomes configured on NR. During T1 the SCell is powered off and UE is not aware of SCell.

A MAC message for activation of SCell is sent by the test equipment 100ms after the RRC message, in a slot # denoted m . The point in time at which the MAC message for activation of SCell is received at the UE antenna connector defines the start of time period T2. Immediately at beginning of T2 the transmission power of cell 3 is increased to same level as for cell 2. The UE shall be able to report valid CSI for the activated SCell at latest in slot $m + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$ as defined in clause 8.3 provided the SCell can be successfully detected on the first attempt. The UE shall start reporting CSI in slot $(m+k)$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PSCell interruption due to activation of SCell shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to slot $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in section 8.2. Any E-UTRA PCell interruption due to activation of SCell shall occur in the subframe $m_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{EUTRA slot length}} + N_{\text{interruption}}$, where m_1 and m_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot m , and $N_{\text{interruption}}$ is the interruption length given in TS 36.133 [14] section 7.32.

Time period T3 starts when a MAC message for deactivation of the SCell, sent from the test equipment to the UE in a slot # denoted n , is received at the UE antenna connector. The UE shall carry out deactivation of the SCell at latest in slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$ as defined in clause 8.3. The starting point of any PSCell interruption due to the deactivation shall occur in the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3. The starting point of any E-UTRA PCell interruption due to the deactivation shall occur in the subframe $n_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA subframe length}}$ to subframe $n_2 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{EUTRA subframe length}}$, where n_1 and n_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot n .

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PSCell during activation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CSI reporting for SCell1 is discontinued.

Table A.4.5.3.1-1: General test parameters for unknown FR1 SCell activation case, 160ms SCell measurement cycle

| Parameter | Unit | Value | Comment |
|-----------|------|-------|--|
| T1 | ms | 100 | During this time the PSCell shall be known and the SCell configured, but not detected. |

A.4.5.3.3.2 Test Requirements

The test requirements defined in clause A.4.5.3.1.2 shall apply to this test case, except $T_{\text{activation_time}}$ will be replaced with the value $T_{\text{FirstSSB_MAX}} + T_{\text{SMTC_MAX}} + 2 \cdot T_{\text{rs}} + 5\text{ms}$ as defined in clause 8.3.

A.4.5.4 UE UL carrier RRC reconfiguration Delay

A.4.5.4.1 UE UL carrier RRC reconfiguration Delay

Table A.4.5.4.1-1 - Table A.4.5.4.1-4 : Void

A.4.5.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that when the UE receives a RRC message implying NR UL or Supplementary UL carrier configuration, the UE shall be ready to start transmission on the newly configured carrier within the time limits specified in clause 8.4.2 and 8.4.3 for configuring and deconfiguring, respectively.

There are three cells: E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and FR1 SCell (Cell 3). For SCell, both NR uplink and supplementary uplink are broadcast by *ServingCellConfigCommonSIB*. The test parameters for PSCell and SCell are given in Table A. 4.5.4.1.1-1, Table A. 4.5.4.1.1-2, Table A. 4.5.4.1.1-3 and Table A. 4.5.4.1.1-4 below. The test parameters and applicability for E-UTRAN PCell are defined in A.3.7.2. The test consists two tests. In test 1, the test consists of three time periods, with duration of T1, T2 and T3 respectively. During time duration T1, NR uplink of cell 3 is configured to UE. At the start of T2, a supplementary uplink of cell3 is configured to UE through *RRCReconfiguration*, then UE shall start transmission both on the NR uplink and supplementary uplink. At the start of T3, the supplementary uplink is released through *RRCReconfiguration*.

In test 2, the test consists of three time periods, with duration of T1, T2 and T3 respectively. During time duration T1, supplementary uplink on cell 3 is configured to UE. At the start of T2, a NR uplink is configured to UE through *RRCReconfiguration*, then UE shall start transmission both on the NR uplink and supplementary uplink. At the start of T3, the NR uplink is released through *RRCReconfiguration*.

Table A.4.5.4.1.1-1: Supported test configurations

| Configuration | PSCell (Cell2) | SCell (Cell3) |
|---------------|---|---|
| 1 | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | DL and UL: 15kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode; SUL: 15kHz SCS, 10 MHz bandwidth, SUL duplex mode |
| 2 | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | DL and UL: 15kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode; SUL: 15kHz SCS, 10 MHz bandwidth, SUL duplex mode |
| 3 | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | DL and UL: 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode; SUL: 30kHz SCS, 40 MHz bandwidth, SUL duplex mode |
| 4 | 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | DL and UL: 15kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode; SUL: 15kHz SCS, 10 MHz bandwidth, SUL duplex mode |
| 5 | 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | DL and UL: 15kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode; SUL: 15kHz SCS, 10 MHz bandwidth, SUL duplex mode |
| 6 | 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | DL and UL: 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode; SUL: 30kHz SCS, 40 MHz bandwidth, SUL duplex mode |
| 7 | 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | DL and UL: 15kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode; SUL: 15kHz SCS, 10 MHz bandwidth, SUL duplex mode |

| | | |
|--|---|---|
| 8 | 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | DL and UL: 15kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode; SUL: 15kHz SCS, 10 MHz bandwidth, SUL duplex mode |
| 9 | 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | DL and UL: 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode; SUL: 30kHz SCS, 40 MHz bandwidth, SUL duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations | | |

Table A.4.5.4.1.1-2: General test parameters for EN-DC UE UL carrier RRC reconfiguration Delay

| Parameter | Unit | Test configuration | Value | Comment |
|----------------------------|------|--------------------------------|--|---|
| RF Channel Number | | Config 1,2,3, 4, 5, 6, 7, 8, 9 | 1, 2, 3 | Three radio channels are used for these two tests. |
| Active cell | | Config 1,2,3, 4, 5, 6, 7, 8, 9 | Cell 1: E-UTRAN PCell Cell 2: FR1 PSCell Cell 3: FR1 SCell | E-UTRAN PCell on RF channel number 1 FR1 PSCell on RF channel number 2 FR1 SCell on RF channel number 3 |
| CP length | | Config 1,2,3, 4, 5, 6, 7, 8, 9 | Normal | |
| DRX | | Config 1,2,3, 4, 5, 6, 7, 8, 9 | OFF | |
| Measurement gap pattern Id | | Config 1,2,3, 4, 5, 6, 7, 8, 9 | OFF | |
| Filter coefficient | | Config 1,2,3, 4, 5, 6, 7, 8, 9 | 0 | L3 filtering is not used |
| T1 | s | Config 1,2,3, 4, 5, 6, 7, 8, 9 | 5 | |
| T2 | s | Config 1,2,3, 4, 5, 6, 7, 8, 9 | 5 | |
| T3 | s | Config 1,2,3, 4, 5, 6, 7, 8, 9 | 5 | |

Table A.4.5.4.1.1-3: NR Cell specific test parameters for EN-DC UE UL carrier RRC reconfiguration Delay on PSCell (Cell 2)

| Parameter | Unit | Test Configuration | Test 1 | | | Test 2 | | |
|--|------|--------------------------------|-----------------------------|----|----|-----------------------------|----|----|
| | | | T1 | T2 | T3 | T1 | T2 | T3 |
| Channel number | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | 2 | | | 2 | | |
| TDD configuration | | Conf 1, 2, 3 | N/A | | | N/A | | |
| | | Conf 4, 5, 6 | TDD Conf.1.1 | | | TDD Conf.1.1 | | |
| | | Conf 7, 8, 9 | TDD Conf.2.1 | | | TDD Conf.2.1 | | |
| BW _{channel} | MHz | Conf 1, 2, 3 | 10: N _{RB,c} = 52 | | | 10: N _{RB,c} = 52 | | |
| | | Conf 4, 5, 6 | 10: N _{RB,c} = 52 | | | 10: N _{RB,c} = 52 | | |
| | | Conf 7, 8, 9 | 40: N _{RB,c} = 106 | | | 40: N _{RB,c} = 106 | | |
| PDSCH reference measurement channel as defined in A.3.1.1 | | Conf 1, 2, 3 | SR.1.1 FDD | | | SR.1.1 FDD | | |
| | | Conf 4, 5, 6 | SR.1.1 TDD | | | SR.1.1 TDD | | |
| | | Conf 7, 8, 9 | SR.2.1 TDD | | | SR.2.1 TDD | | |
| RMSI CORESET reference measurement channel as defined in A.3.1.2 | | Conf 1, 2, 3 | CR.1.1 FDD | | | CR.1.1 FDD | | |
| | | Conf 4, 5, 6 | CR.1.1 TDD | | | CR.1.1 TDD | | |
| | | Conf 7, 8, 9 | CR.2.1 TDD | | | CR.2.1 TDD | | |
| | | Conf 1, 2, 3 | CCR.1.1 FDD | | | CCR.1.1 FDD | | |

| | | | | | | | | |
|---|-----------------|--------------------------------|-------------|-------|-------|-------------|-------|-------|
| RMC CORESET reference measurement channel as defined in A.3.1.3 | | Conf 4, 5, 6 | CCR.1.1 TDD | | | CCR.1.1 TDD | | |
| | | Conf 7, 8, 9 | CCR.2.1 TDD | | | CCR.2.1 TDD | | |
| OCNG Pattern ^{Note 1} | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | OP.1 | | | OP.1 | | |
| SSB configuration | | Conf 1, 2, 3, 4, 5, 6 | SSB.1 FR1 | | | SSB.1 FR1 | | |
| | | Conf 7, 8, 9 | SSB.2 FR1 | | | SSB.2 FR1 | | |
| SMTC configuration | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | SMTC.1 | | | SMTC.1 | | |
| DL initial BWP configuration | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | DLBWP.0.1 | | | DLBWP.0.1 | | |
| DL dedicated BWP configuration | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | DLBWP.1.1 | | | DLBWP.1.1 | | |
| UL dedicated BWP configuration | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | ULBWP.1.1 | | | ULBWP.1.1 | | |
| EPRE ratio of PSS to SSS | dB | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | 0 | | | 0 | | |
| EPRE ratio of PBCH_DMRS to SSS | | | | | | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | | | | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | | | | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | | | | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | | | | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | | | | | | | |
| N_{oc} ^{Note 2} | dBm / 15kHz | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | -102 | | | -102 | | |
| | dBm / SCS | Conf 1,2,3,4,5,6 | -102 | | | -102 | | |
| | | Conf 7,8,9 | -99 | | | -99 | | |
| \hat{E}_s / N_{oc} | dB | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | 16 | 16 | 16 | 16 | 16 | 16 |
| \hat{E}_s / I_{ot} ^{Note 3} | dB | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | 16 | 16 | 16 | 16 | 16 | 16 |
| SS-RSRP ^{Note 3} | dBm / SCS | Conf 1,2,3,4,5,6 | -86 | -86 | -86 | -86 | -86 | -86 |
| | | Conf 7,8,9 | -83 | -83 | -83 | -83 | -83 | -83 |
| I_o ^{Note 3} | dBm / 9.36 MHz | Conf 1,2,3,4,5,6 | -57.9 | -57.9 | -57.9 | -57.9 | -57.9 | -57.9 |
| | dBm / 38.16 MHz | Conf 7,8,9 | -51.8 | -51.8 | -51.8 | -51.8 | -51.8 | -51.8 |

| | | | | |
|--|--|--------------------------------|-------|-------|
| Propagation Condition | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | AWGN | AWGN |
| Antenna configuration | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | 1 x 2 | 1 x 2 |
| NOTE 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | |
| NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | |
| NOTE 3: \hat{E}_s/I_{ot} , I_o , and SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | |

Table A.4.5.4.1.1-4: NR Cell specific test parameters for EN-DC UE UL carrier RRC reconfiguration Delay on SCell (Cell 3)

| Parameter | Unit | Test Configuration | Test 1 | | | Test 2 | | |
|---------------------------------------|------|--------------------------------|-----------------------------|---------------------------|---------------------------|-----------------------------|---------------------|---------------------|
| | | | T1 | T2 | T3 | T1 | T2 | T3 |
| Channel number | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | 3 | | | 3 | | |
| TDD configuration | | Conf 1, 4, 7 | N/A | | | N/A | | |
| | | Conf 2, 5, 8 | TDDConf.1.1 | | | TDDConf.1.1 | | |
| | | Conf 3, 6, 9 | TDDConf.2.1 | | | TDDConf.2.1 | | |
| BW _{channel} | MHz | Conf 1, 4, 7 | 10: N _{RB,c} = 52 | | | 10: N _{RB,c} = 52 | | |
| | | Conf 2, 5, 8 | 10: N _{RB,c} = 52 | | | 10: N _{RB,c} = 52 | | |
| | | Conf 3, 6, 9 | 40: N _{RB,c} = 106 | | | 40: N _{RB,c} = 106 | | |
| PUSCH parameters for NR UL carrier | | Conf 1, 4, 7 | G-FR1-A3-10 in [13] | G-FR1-A3-10 in [13] | G-FR1-A3-10 in [13] | N/A | G-FR1-A3-10 in [13] | N/A |
| | | Conf 2, 5, 8 | G-FR1-A3-10 in [13] | G-FR1-A3-10 in [13] | G-FR1-A3-10 in [13] | N/A | G-FR1-A3-10 in [13] | N/A |
| | | Conf 3, 6, 9 | G-FR1-A3-14 in [13] | G-FR1-A3-14 in [13] | G-FR1-A3-14 in [13] | N/A | G-FR1-A3-14 in [13] | N/A |
| PUCCH parameters For NR UL carrier | | Conf 1, 4, 7 | Table 8.3.3.1.2-1 in [13] | Table 8.3.3.1.2-1 in [13] | Table 8.3.3.1.2-1 in [13] | N/A | N/A | N/A |
| | | Conf 2, 5, 8 | Table 8.3.3.1.2-1 in [13] | Table 8.3.3.1.2-1 in [13] | Table 8.3.3.1.2-1 in [13] | N/A | N/A | N/A |
| | | Conf 3, 6, 9 | Table 8.3.3.1.2-2 in [13] | Table 8.3.3.1.2-2 in [13] | Table 8.3.3.1.2-2 in [13] | N/A | N/A | N/A |
| PUSCH parameters for supplementary UL | | Conf 1, 4, 7 | N/A | G-FR1-A3-10 in [13] | N/A | G-FR1-A3-10 in [13] | G-FR1-A3-10 in [13] | G-FR1-A3-10 in [13] |
| | | Conf 2, 5, 8 | N/A | G-FR1-A3-10 in [13] | N/A | G-FR1-A3-10 in [13] | G-FR1-A3-10 in [13] | G-FR1-A3-10 in [13] |
| | | Conf 3, 6, 9 | N/A | G-FR1-A3-14 in [13] | N/A | G-FR1-A3-14 in [13] | G-FR1-A3-14 in [13] | G-FR1-A3-14 in [13] |

| | | | | | | | | |
|--|----|--------------------------------|-------------|-----|-----|----------------------------|----------------------------|----------------------------|
| PUCCH parameters for supplementary UL | | Conf 1, 4, 7 | N/A | N/A | N/A | Table 8.3.3.1.2 -1 in [13] | Table 8.3.3.1.2 -1 in [13] | Table 8.3.3.1.2 -1 in [13] |
| | | Conf 2, 5, 8 | N/A | N/A | N/A | Table 8.3.3.1.2 -1 in [13] | Table 8.3.3.1.2 -1 in [13] | Table 8.3.3.1.2 -1 in [13] |
| | | Conf 3, 6, 9 | N/A | N/A | N/A | Table 8.3.3.1.2 -2 in [13] | Table 8.3.3.1.2 -2 in [13] | Table 8.3.3.1.2 -2 in [13] |
| PDSCH reference measurement channel as defined in A.3.1.1 | | Conf 1, 4, 7 | SR.1.1 FDD | | | SR.1.1 FDD | | |
| | | Conf 2, 5, 8 | SR.1.1 TDD | | | SR.1.1 TDD | | |
| | | Conf 3, 6, 9 | SR 2.1 TDD | | | SR 2.1 TDD | | |
| RMSI CORESET reference measurement channel as defined in A.3.1.2 | | Conf 1, 4, 7 | CR.1.1 FDD | | | CR.1.1 FDD | | |
| | | Conf 2, 5, 8 | CR.1.1 TDD | | | CR.1.1 TDD | | |
| | | Conf 3, 6, 9 | CR.2.1 TDD | | | CR.2.1 TDD | | |
| RMC CORESET reference measurement channel as defined in A.3.1.3 | | Conf 1, 4, 7 | CCR.1.1 FDD | | | CCR.1.1 FDD | | |
| | | Conf 2, 5, 8 | CCR.1.1 TDD | | | CCR.1.1 TDD | | |
| | | Conf 3, 6, 9 | CCR.2.1 TDD | | | CCR.2.1 TDD | | |
| OCNG Pattern ^{Note 1} | | Conf 1, 2, 3 | OP.1 | | | OP.1 | | |
| SSB configuration | | Conf 1, 2, 4, 5, 7, 8 | SSB.1 FR1 | | | SSB.1 FR1 | | |
| | | Conf 3, 6, 9 | SSB.2 FR1 | | | SSB.2 FR1 | | |
| SMTc configuration | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | SMTc.1 | | | SMTc.1 | | |
| DL initial BWP configuration | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | DLBWP.0.1 | | | DLBWP.0.1 | | |
| DL dedicated BWP configuration | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | DLBWP.1.1 | | | DLBWP.1.1 | | |
| UL dedicated BWP configuration | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | ULBWP.1.1 | | | ULBWP.1.1 | | |
| EPRE ratio of PSS to SSS | dB | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | 0 | | | 0 | | |
| EPRE ratio of PBCH_DMRS to SSS | | | | | | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | | | | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | | | | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | | | | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | | | | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | | | | | | | |

| | | | | | | | | |
|--|---------------|--------------------------------|-------|-------|-------|-------|-------|-------|
| N_{oc} ^{Note 2} | dBm / 15kHz | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | -102 | | | -102 | | |
| | dBm/SCS | Conf 1, 2, 4, 5, 7, 8 | -102 | | | -102 | | |
| | | Conf 3, 6, 9 | -99 | | | -99 | | |
| \hat{E}_s / N_{oc} | dB | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | 16 | 16 | 16 | 16 | 16 | 16 |
| \hat{E}_s / I_{ot} ^{Note 3} | dB | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | 16 | 16 | 16 | 16 | 16 | 16 |
| SS-RSRP ^{Note 3} | dBm/SCS | Conf 1, 2, 4, 5, 7, 8 | -86 | -86 | -86 | -86 | -86 | -86 |
| | | Conf 3, 6, 9 | -83 | -83 | -83 | -83 | -83 | -83 |
| I_o ^{Note 3} | dBm/9.36 MHz | Conf 1, 2, 4, 5, 7, 8 | -57.9 | -57.9 | -57.9 | -57.9 | -57.9 | -57.9 |
| | dBm/38.16 MHz | Conf 3, 6, 9 | -51.8 | -51.8 | -51.8 | -51.8 | -51.8 | -51.8 |
| Propagation Condition | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | AWGN | | | AWGN | | |
| Antenna configuration | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | 1 x 2 | | | 1 x 2 | | |
| <p>NOTE 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>NOTE 3: \hat{E}_s / I_{ot}, I_o, and SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | | | |

A.4.5.4.1.2 Test Requirements

In test 1 the UE shall be ready to start transmission on the supplementary uplink carrier on SCell within 20ms from the start of T2.

In test 1 the UE shall stop the transmission on the supplementary uplink carrier on SCell within 20ms from the start of T3.

In test 2 the UE shall be ready to start transmission on the NR uplink carrier on SCell within 20ms from the start of T2.

In test 2 the UE shall stop the transmission on the NR uplink carrier on SCell within 20ms from the start of T3.

All of the above test requirements shall be fulfilled in order for the observed UE UL carrier configuration delay and UE UL carrier release delay to be counted as correct. The rate of correct observed UE UL carrier configuration delay and UE UL carrier release delay during repeated tests shall be at least 90%.

A.4.5.5 Beam Failure Detection and Link recovery procedures

A.4.5.5.1 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with SSB-based BFD and LR in non-DRX mode

A.4.5.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The

purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.4.5.5.1.1-1, A.4.5.5.1.1-2, A.4.5.5.1.1-3 and A.4.5.5.1.1-4 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.5.1.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSB in set q_0 in the active PSCell to emulate SSB based beam failure. Figure A.4.5.5.1.1-1 additionally shows the variation of the downlink SNR of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

Table A.4.5.5.1.1-1: Supported test configurations for FR1 PCell

| Configuration | Description |
|---------------|--|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to pass in one of the supported test configurations in FR1 |

Table A.4.5.5.1.1-2: General test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

| Parameter | Unit | Value | | Comment |
|--------------------------------|-------------------------|-------|-----------------|---------|
| | | | Test 1 | |
| Active E-UTRA PCell | | | Cell 1 | |
| E-UTRA RF Channel Number | | | 1 | |
| Active PSCell | | | Cell 2 | |
| RF Channel Number | | | 2 | |
| Duplex mode | Config 1, 4 | | FDD | |
| | | | TDD | |
| BWchannel | Config 1, 4 | MHz | 10: NRB,c = 52 | |
| | Config 2, 5 | | 10: NRB,c = 52 | |
| | Config 3, 6 | | 40: NRB,c = 106 | |
| DL initial BWP configuration | Config 1, 2, 3, 4, 5, 6 | | DLBWP.0.1 | |
| DL dedicated BWP configuration | Config 1, 2, 3, 4, 5, 6 | | DLBWP.1.1 | |
| UL initial BWP configuration | Config 1, 2, 3, 4, 5, 6 | | ULBWP.0.1 | |

| | | | | |
|--|---|-----|-------------------|--|
| UL dedicated BWP configuration | Config 1, 2, 3, 4, 5, 6 | | ULBWP.1.1 | |
| TDD Configuration | Config 1, 4 | | Not Applicable | |
| | Config 2, 5 | | TDDConf.1.1 | |
| | Config 3, 6 | | TDDConf.2.1 | |
| CORESET Reference Channel | Config 1, 4 | | CR.1.1 FDD | |
| | Config 2, 5 | | CR.1.1 TDD | |
| | Config 3, 6 | | CR.2.1 TDD | |
| SSB Configuration | Config 1, 4 | | SSB.3 FR1 | |
| | Config 2, 5 | | SSB.3 FR1 | |
| | Config 3, 6 | | SSB.4 FR1 | |
| SMTC Configuration | Config 1, 2, 4, 5 | | SMTC.1 | |
| | Config 3, 6 | | SMTC.1 | |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2, 4, 5 | | 15 KHz | |
| | Config 3, 6 | | 30 KHz | |
| PRACH Configuration | Config 1, 2, 4, 5 | | Table A.3.8.2.2-1 | |
| | Config 3, 6 | | Table A.3.8.2.2-1 | |
| SSB Index assigned as BFD RS (q_0) | | | 0 | |
| SSB Index assigned as CBD RS (q_i) | | | 1 | |
| OCNG parameters | | | OP.1 | |
| CP length | | | Normal | |
| Correlation Matrix and Antenna Configuration | | | 2x2 Low | |
| Beam failure detection transmission parameters | DCI format | | 1-0 | |
| | Number of Control OFDM symbols | | 2 | |
| | Aggregation level | CCE | 8 | |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 | |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 | |
| | DMRS precoder granularity | | REG bundle size | |
| | REG bundle size | | 6 | |
| DRX | | | OFF | |
| Gap pattern ID | | | gp0 | |

| | | | | |
|---|-------------|-----|----------------|--|
| rimInSyncOutOfSyncThreshold | | | absent | When the field is absent, the UE applies the value 0. (Table 8.1.1-1). |
| rsrp-ThresholdSSB | | dBm | -98 | Threshold used for $Q_{in_LR_SSB}$ |
| powerControlOffsetSS | | | db0 | Used for deriving rsrp-ThresholdCSI-RS |
| beamFailureInstanceMaxCount | | | n1 | see TS 38.321 [7], clause 5.17 |
| beamFailureDetectionTimer | | | pbfd4 | see TS 38.321 [7], clause 5.17 |
| CSI-RS configuration for CSI reporting | Config 1, 4 | | CSI-RS.1.1 FDD | |
| | Config 2, 5 | | CSI-RS.1.1 TDD | |
| | Config 3, 6 | | CSI-RS.2.1 TDD | |
| CSI-RS for tracking | Config 1, 4 | | TRS.1.1 FDD | |
| | Config 2, 5 | | TRS.1.1 TDD | |
| | Config 3, 6 | | TRS.1.2 TDD | |
| SSB Index assigned as RLM RS | | | 0,1 | |
| T310 timer | | ms | 1000 | |
| N310 | | | 2 | |
| T1 | | s | 0.2 | During this time the the UE shall be fully synchronized to cell 1 |
| T2 | | s | 0.37 | |
| T3 | | s | 0.24 | |
| T4 | | s | 0 | |
| T5 | | s | 0.17 | |
| D1 | | s | 0.13 | |
| Note 1: All configurations are assigned to the UE prior to the start of time period T1. | | | | |
| Note 2: UE-specific PDCCH is not transmitted after T1 starts. | | | | |
| Note 3: E-UTRAN is in non-DRX mode under test. | | | | |

Table A.4.5.5.1.1-3: Cell specific test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

| Parameter | | Unit | Test 1 | | | | |
|-----------------------------------|-------------|------|--------|-----|-----|-----|-----|
| | | | T1 | T2 | T3 | T4 | T5 |
| EPRE ratio of PDCCH DMRS to SSS | | dB | 0 | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | |
| EPRE ratio of PSS to SSS | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | | | | | | |
| SNR_SSB of set q_0 | Config 1, 4 | dB | 5 | -3 | -12 | -12 | -12 |
| | Config 2, 5 | | 5 | -3 | -12 | -12 | -12 |
| | Config 3, 6 | | 5 | -3 | -12 | -12 | -12 |
| SNR_SSB of set q_1 | Config 1, 4 | dB | -12 | -12 | 5 | 5 | 5 |
| | Config 2, 5 | | -12 | -12 | 5 | 5 | 5 |

| | | | | | | | |
|-----------------------|---|---------------|-------------------|-----|---|---|---|
| N_{oc} | Config 3, 6 | dBm/15 KHz | -12 | -12 | 5 | 5 | 5 |
| | Config 1, 4 | | -98 | | | | |
| | Config 2, 5 | | -98 | | | | |
| | Config 3, 6 | | -98 | | | | |
| Propagation condition | | | TDL-C 300ns 100Hz | | | | |
| Note 1: | OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | |
| Note 2: | The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | | |
| Note 3: | NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | | |
| Note 4: | Measurement gap configuration is assigned to the UE prior to the start of time period T1. | | | | | | |
| Note 5: | The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. | | | | | | |
| Note 6: | The signal contains PDCCH for UEs other than the device under test as part of OCNG. | | | | | | |
| Note 7: | SNR levels correspond to the signal to noise ratio over the SSS REs. | | | | | | |
| Note 8: | The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1. | | | | | | |
| Note 9: | The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6. | | | | | | |

Table A.4.5.5.1.1-4: Void

| Field | Test 1 |
|-----------|--------|
| | Value |
| gapOffset | 0 |

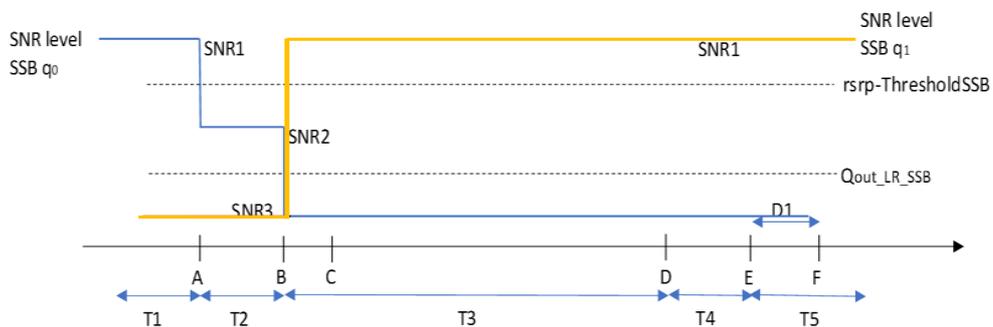


Figure A.4.5.5.1.1-1: SNR variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.4.5.5.1.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 120+10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.5.2 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with SSB-based BFD and LR in DRX mode

A.4.5.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.4.5.5.2.1-1, A.4.5.5.2.1-2, A.4.5.5.2.1-3, A.4.5.5.2.1-4 and A.4.5.5.2.1-5 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.5.2.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSB in set q_0 in the active PSCell to emulate SSB based beam failure. Figure A.4.5.5.2.1-1 additionally shows the variation of the downlink SNR of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.4.5.5.2.1-1: Supported test configurations for FR1 PCell

| Configuration | Description |
|---------------|--|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to pass in one of the supported test configurations in FR1 |

Table A.4.5.5.2.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

| Parameter | | Unit | Value | Comment |
|--------------------------|-------------------|------|---------------|---------|
| | | | Test 1 | |
| Active E-UTRA PCell | | | Cell 1 | |
| E-UTRA RF Channel Number | | | 1 | |
| Active PSCell | | | Cell 2 | |
| RF Channel Number | | | 2 | |
| Duplex mode | Config 1, 4 | | FDD | |
| | Config 2, 3, 5, 6 | | TDD | |

| | | | | |
|--|--------------------------------|-----|-------------------|--|
| BWchannel | Config 1, 4 | MHz | 10: NRB,c = 52 | |
| | Config 2, 5 | | 10: NRB,c = 52 | |
| | Config 3, 6 | | 40: NRB,c = 106 | |
| DL initial BWP configuration | Config 1, 2, 3, 4, 5, 6 | | DLBWP.0.1 | |
| DL dedicated BWP configuration | Config 1, 2, 3, 4, 5, 6 | | DLBWP.1.1 | |
| UL initial BWP configuration | Config 1, 2, 3, 4, 5, 6 | | ULBWP.0.1 | |
| UL dedicated BWP configuration | Config 1, 2, 3, 4, 5, 6 | | ULBWP.1.1 | |
| TDD Configuration | Config 1, 4 | | Not Applicable | |
| | Config 2, 5 | | TDDConf.1.1 | |
| | Config 3, 6 | | TDDConf.2.1 | |
| CORESET Reference Channel | Config 1, 4 | | CR.1.1 FDD | |
| | Config 2, 5 | | CR.1.1 TDD | |
| | Config 3, 6 | | CR.2.1 TDD | |
| SSB Configuration | Config 1, 4 | | SSB.3 FR1 | |
| | Config 2, 5 | | SSB.3 FR1 | |
| | Config 3, 6 | | SSB.4 FR1 | |
| SMTC Configuration | Config 1, 2, 4, 5 | | SMTC.1 | |
| | Config 3, 6 | | SMTC.1 | |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2, 4, 5 | | 15 KHz | |
| | Config 3, 6 | | 30 KHz | |
| PRACH Configuration | Config 1, 2, 4, 5 | | Table A.3.8.2.2-1 | |
| | Config 3, 6 | | Table A.3.8.2.2-1 | |
| SSB Index assigned as BFD RS (q_0) | | | 0 | |
| SSB Index assigned as CBD RS (q_1) | | | 1 | |
| OCNG parameters | | | OP.1 | |
| CP length | | | Normal | |
| Correlation Matrix and Antenna Configuration | | | 2x2 Low | |
| Beam failure detection transmission parameters | DCI format | | 1-0 | |
| | Number of Control OFDM symbols | | 2 | |
| | Aggregation level | CCE | 8 | |

| | | | | |
|---|---|-----|-----------------|--|
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 | |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 | |
| | DMRS precoder granularity | | REG bundle size | |
| | REG bundle size | | 6 | |
| DRX | | | DRX.7 | A.3.3.7 |
| Gap pattern ID | | | N.A. | |
| rlmInSyncOutOfSyncThreshold | | | absent | When the field is absent, the UE applies the value 0. (Table 8.1.1-1). |
| rsrp-ThresholdSSB | | dBm | -98 | Threshold used for $Q_{in_LR_SSB}$ |
| powerControlOffsetSS | | | db0 | Used for deriving rsrp-ThresholdCSI-RS |
| beamFailureInstanceMaxCount | | | n1 | see TS 38.321 [7], clause 5.17 |
| beamFailureDetectionTimer | | | pbfd4 | see TS 38.321 [7], clause 5.17 |
| CSI-RS configuration for CSI reporting | Config 1, 4 | | CSI-RS.1.1 FDD | |
| | Config 2, 5 | | CSI-RS.1.1 TDD | |
| | Config 3, 6 | | CSI-RS.2.1 TDD | |
| CSI-RS for tracking | Config 1, 4 | | TRS.1.1 FDD | |
| | Config 2, 5 | | TRS.1.1 TDD | |
| | Config 3, 6 | | TRS.1.2 TDD | |
| SSB Index assigned as RLM RS | | | 0,1 | |
| T310 Timer | | ms | 1000 | |
| N310 | | | 2 | |
| T1 | | s | 1 | During this time the the UE shall be fully synchronized to cell 1 |
| T2 | | s | 5.17 | |
| T3 | | s | 3.24 | |
| T4 | | s | 0 | |
| T5 | | s | 1.97 | |
| D1 | | s | 1.93 | |
| Note 1: All configurations are assigned to the UE prior to the start of time period T1. | | | | |
| Note 2: UE-specific PDCCH is not transmitted after T1 starts. | | | | |
| Note 3: E-UTRAN is in non-DRX mode under test. | | | | |

Table A.4.5.2.1-3: Cell specific test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in DRX mode

| Parameter | | Unit | Test 1 | | | | |
|---|-------------|---------------|-------------------|-----|-----|-----|-----|
| | | | T1 | T2 | T3 | T4 | T5 |
| EPRE ratio of PDCCH DMRS to SSS | | dB | 0 | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | |
| EPRE ratio of PSS to SSS | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | | | | | | |
| SNR_SSB of set q_0 | Config 1, 4 | dB | 5 | -3 | -12 | -12 | -12 |
| | Config 2, 5 | | 5 | -3 | -12 | -12 | -12 |
| | Config 3, 6 | | 5 | -3 | -12 | -12 | -12 |
| SNR_SSB of set q_1 | Config 1, 4 | dB | -12 | -12 | 5 | 5 | 5 |
| | Config 2, 5 | | -12 | -12 | 5 | 5 | 5 |
| | Config 3, 6 | | -12 | -12 | 5 | 5 | 5 |
| N_{oc} | Config 1, 4 | dBm/15 KHz | -98 | | | | |
| | Config 2, 5 | | -98 | | | | |
| | Config 3, 6 | | -98 | | | | |
| Propagation condition | | | TDL-C 300ns 100Hz | | | | |
| <p>Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.</p> <p>Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.</p> <p>Note 4: Void</p> <p>Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.</p> <p>Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.</p> <p>Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.</p> <p>Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.1.1-1.</p> <p>Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.</p> | | | | | | | |

Table A.4.5.5.2.1-4: Void

Table A.4.5.5.2.1-5: Void

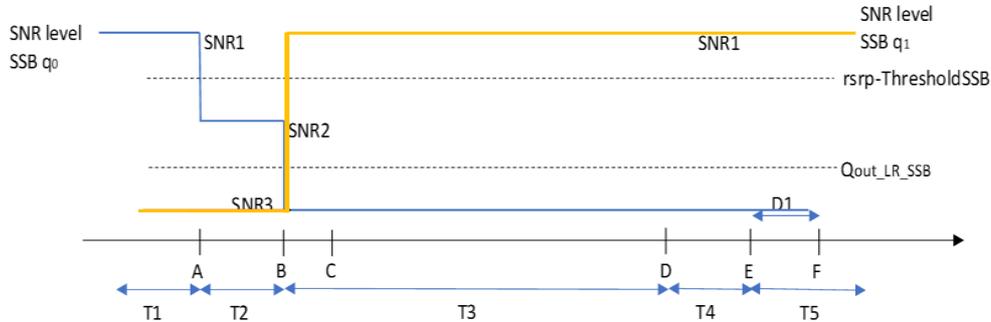


Figure A.4.5.5.2.1-1: SNR variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.4.5.5.2.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 1920 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.5.3 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with CSI-RS-based BFD and LR in non-DRX mode

A.4.5.5.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.4.5.5.3.1-1, A.4.5.5.3.1-2, and A.4.5.5.3.1-3 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.5.3.1-1 shows the variation of the downlink SNR of the PSCell and the SNR of the CSI-RS in set q_0 in the active PSCell to emulate CSI-RS based beam failure. Figure A.4.5.5.3.1-1 additionally shows the variation of the downlink SNR of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1

and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. In the test, DRX configuration is not enabled.

Table A.4.5.5.3.1-1: Supported test configurations for FR1 PSCell

| Configuration | Description |
|---------------|--|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to pass in one of the supported test configurations in FR1 |

Table A.4.5.5.3.1-2: General test parameters for FR1 PSCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

| Parameter | Unit | Value | Comment |
|---|--------------------------------|----------------|---------|
| | | Test 1 | |
| Active PCell | | Cell 1 | |
| RF Channel Number | | 1 | |
| Active PSCell | | Cell 2 | |
| RF Channel Number | | 2 | |
| Duplex mode | Config 1, 4 | FDD | |
| | Config 2, 3, 5, 6 | TDD | |
| TDD Configuration | Config 1, 4 | Not Applicable | |
| | Config 2, 5 | TDDConf.1.1 | |
| | Config 3, 6 | TDDConf.2.1 | |
| CORESET Reference Channel | Config 1, 4 | CR.1.1 FDD | A.3.1.2 |
| | Config 2, 5 | CR.1.1 TDD | |
| | Config 3, 6 | CR.2.1 TDD | |
| SSB Configuration | Config 1, 4 | SSB.1 FR1 | A.3.10 |
| | Config 2, 5 | SSB.1 FR1 | |
| | Config 3, 6 | SSB.2 FR1 | |
| SMTC Configuration | Config 1, 2, 4, 5 | SMTC.1 | A.3.11 |
| | Config 3, 6 | SMTC.1 | |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2, 4, 5 | 15 KHz | |
| | Config 3, 6 | 30 KHz | |
| csi-RS-Index assigned as beam failure detection RS in set q_0 | | 0 | |
| OCNG parameters | | OP.1 | A.3.2.1 |
| CP length | | Normal | |
| Correlation Matrix and Antenna Configuration | | 2x2 Low | |
| Beam failure detection transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |

| | | | | |
|---|---|-----|-----------------|--|
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 | |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 | |
| | DMRS precoder granularity | | REG bundle size | |
| | REG bundle size | | 6 | |
| DRX | | | OFF | |
| Gap pattern ID | | | N.A. | |
| csi-RS-Index assigned as candidate beam detection RS in set q_1 | | | 1 | |
| rlmInSyncOutOfSyncThreshold | | | absent | When the field is absent, the UE applies the value 0. (Table 8.1.1-1). |
| rsrp-ThresholdSSB | | dBm | -98 | Threshold used for $Q_{in_LR_SSB}$ |
| powerControlOffsetSS | | | db0 | Used for deriving rsrp-ThresholdCSI-RS |
| beamFailureInstanceMaxCount | | | n1 | see TS 38.321 [7], clause 5.17 |
| beamFailureDetectionTimer | | | pbfd4 | see TS 38.321 [7], clause 5.17 |
| CSI-RS configuration for q_0 and q_1 | Config 1, 4 | | CSI-RS.1.2 FDD | A.3.14 |
| | Config 2, 5 | | CSI-RS.1.2 TDD | |
| | Config 3, 6 | | CSI-RS.2.2 TDD | |
| CSI-RS configuration for CSI reporting | Config 1, 4 | | CSI-RS.1.1 FDD | A.3.14 |
| | Config 2, 5 | | CSI-RS.1.1 TDD | |
| | Config 3, 6 | | CSI-RS.2.1 TDD | |
| TRS configuration | Config 1, 4 | | TRS.1.1 FDD | |
| | Config 2, 5 | | TRS.1.1 TDD | |
| | Config 3, 6 | | TRS.1.2 TDD | |
| csi-RS-Index assigned as RLM RS | Config 1, 4 | | CSI-RS.1.2 FDD | A.3.14 |
| | Config 2, 5 | | CSI-RS.1.2 TDD | |
| | Config 3, 6 | | CSI-RS.2.2 TDD | |
| T310 Timer | | ms | 1000 | |
| N310 | | | 2 | |
| T1 | | s | 1 | During this time the the UE shall be fully synchronized to cell 1 |
| T2 | | s | 0.18 | |
| T3 | | s | 0.14 | |
| T4 | | s | 0 | |
| T5 | | s | 0.08 | |
| D1 | | s | 0.04 | |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | | |

Table A.4.5.5.3.1-3: Cell specific test parameters for FR1 PSCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

| Parameter | | Unit | Test 1 | | | | |
|---|-------------|---------------|-------------------|-----|-----|-----|-----|
| | | | T1 | T2 | T3 | T4 | T5 |
| EPRE ratio of PDCCH DMRS to SSS | | dB | 0 | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | |
| EPRE ratio of PSS to SSS | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | | | | | | |
| SNR_CSI-RS of set q_0 | Config 1, 4 | dB | 5 | -3 | -12 | -12 | -12 |
| | Config 2, 5 | | 5 | -3 | -12 | -12 | -12 |
| | Config 3, 6 | | 5 | -3 | -12 | -12 | -12 |
| SNR_CSI-RS of set q_1 | Config 1, 4 | dB | -12 | -12 | 5 | 5 | 5 |
| | Config 2, 5 | | -12 | -12 | 5 | 5 | 5 |
| | Config 3, 6 | | -12 | -12 | 5 | 5 | 5 |
| N_{oc} | Config 1, 4 | dBm/15 KHz | -98 | | | | |
| | Config 2, 5 | | -98 | | | | |
| | Config 3, 6 | | -98 | | | | |
| Propagation condition | | | TDL-C 300ns 100Hz | | | | |
| <p>Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.</p> <p>Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.</p> <p>Note 4: Void</p> <p>Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.</p> <p>Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.</p> <p>Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.</p> <p>Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.</p> <p>Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause [A.3.6].</p> | | | | | | | |

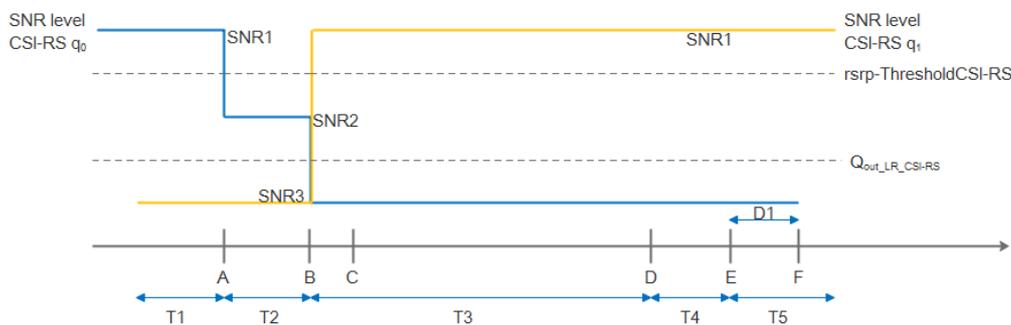


Figure A.4.5.5.3.1-1: SNR variation for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

A.4.5.5.3.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 30+10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.5.4 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with CSI-RS-based BFD and LR in DRX mode

A.4.5.5.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.4.5.5.4.1-1, A.4.5.5.4.1-2, A.4.5.5.4.1-3, and A.4.5.5.4.1-4 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.5.4.1-1 shows the variation of the downlink SNR of the PSCell and the SNR of the CSI-RS in set q_0 in the active PSCell to emulate CSI-RS based beam failure. Figure A.4.5.5.4.1-1 additionally shows the variation of the downlink SNR of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.4.5.5.4.1-1: Supported test configurations for FR1 PSCell

| Configuration | Description |
|---------------|--|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to pass in one of the supported test configurations in FR1 |

Table A.4.5.5.4.1-2: General test parameters for FR1 PSCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

| Parameter | | Unit | Value | Comment |
|---|---|------|-----------------|---------|
| | | | Test 1 | |
| Active PCell | | | Cell 1 | |
| RF Channel Number | | | 1 | |
| Active PSCell | | | Cell 2 | |
| RF Channel Number | | | 2 | |
| Duplex mode | Config 1, 4 | | FDD | |
| | Config 2, 3, 5, 6 | | TDD | |
| TDD Configuration | Config 1, 4 | | Not Applicable | |
| | Config 2, 5 | | TDDConf.1.1 | |
| | Config 3, 6 | | TDDConf.2.1 | |
| CORESET Reference Channel | Config 1, 4 | | CR.1.1 FDD | A.3.1.2 |
| | Config 2, 5 | | CR.1.1 TDD | |
| | Config 3, 6 | | CR.2.1 TDD | |
| SSB Configuration | Config 1, 4 | | SSB.1 FR1 | A.3.10 |
| | Config 2, 5 | | SSB.1 FR1 | |
| | Config 3, 6 | | SSB.2 FR1 | |
| SMTC Configuration | Config 1, 2, 4, 5 | | SMTC.1 | A.3.11 |
| | Config 3, 6 | | SMTC.1 | |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2, 4, 5 | | 15 KHz | |
| | Config 3, 6 | | 30 KHz | |
| csi-RS-Index assigned as beam failure detection RS in set q_0 | | | [0] | |
| OCNG parameters | | | OP.1 | A.3.2.1 |
| CP length | | | Normal | |
| Correlation Matrix and Antenna Configuration | | | 2x2 Low | |
| Beam failure detection transmission parameters | DCI format | | 1-0 | |
| | Number of Control OFDM symbols | | 2 | |
| | Aggregation level | CCE | 8 | |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 | |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 | |
| | DMRS precoder granularity | | REG bundle size | |
| | REG bundle size | | 6 | |

| | | | | |
|---|-------------|-----|----------------|--|
| DRX | | | DRX.7 | A.3.3.7 |
| Gap pattern ID | | | N.A. | |
| csi-RS-Index assigned as candidate beam detection RS in set q_1 | | | 1 | |
| rlmInSyncOutOfSyncThreshold | | | absent | When the field is absent, the UE applies the value 0. (Table 8.1.1-1). |
| rsrp-ThresholdSSB | | dBm | -98 | Threshold used for $Q_{in_LR_SSB}$ |
| powerControlOffsetSS | | | db0 | Used for deriving rsrp-ThresholdCSI-RS |
| beamFailureInstanceMaxCount | | | n1 | see TS 38.321 [7], clause 5.17 |
| beamFailureDetectionTimer | | | pbfd4 | see TS 38.321 [7], clause 5.17 |
| CSI-RS configuration for q_0 and q_1 | Config 1, 4 | | CSI-RS.1.2 FDD | A.3.14 |
| | Config 2, 5 | | CSI-RS.1.2 TDD | |
| | Config 3, 6 | | CSI-RS.2.2 TDD | |
| CSI-RS configuration for CSI reporting | Config 1, 4 | | CSI-RS.1.1 FDD | A.3.14 |
| | Config 2, 5 | | CSI-RS.1.1 TDD | |
| | Config 3, 6 | | CSI-RS.2.1 TDD | |
| TRS configuration | Config 1, 4 | | TRS.1.1 FDD | |
| | Config 2, 5 | | TRS.1.1 TDD | |
| | Config 3, 6 | | TRS.1.2 TDD | |
| csi-RS-Index assigned as RLM RS | Config 1, 4 | | CSI-RS.1.2 FDD | A.3.14 |
| | Config 2, 5 | | CSI-RS.1.2 TDD | |
| | Config 3, 6 | | CSI-RS.2.2 TDD | |
| T310 Timer | | ms | 1000 | |
| N310 | | | 2 | |
| T1 | | s | 1 | During this time the the UE shall be fully synchronized to cell 1 |
| T2 | | s | 8.37 | |
| T3 | | s | 6.44 | |
| T4 | | s | 0 | |
| T5 | | s | 1.97 | |
| D1 | | s | 1.93 | |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | | |

Table A.4.5.5.4.1-3: Cell specific test parameters for FR1 PSCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

| Parameter | Unit | Test 1 | | | | |
|-----------|------|--------|----|----|----|----|
| | | T1 | T2 | T3 | T4 | T5 |
| | | | | | | |

| | | | | | | | |
|---|-------------|---------------|-------------------|-----|-----|-----|-----|
| EPRE ratio of PDCCH DMRS to SSS | dB | 0 | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | dB | | | | | | |
| EPRE ratio of PBCH DMRS to SSS | dB | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | dB | | | | | | |
| EPRE ratio of PSS to SSS | dB | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | dB | | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | dB | | | | | | |
| EPRE ratio of OCNG DMRS to SSS | dB | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | dB | | | | | | |
| SNR_CSI-RS of set q_0 | Config 1, 4 | dB | 5 | -3 | -12 | -12 | -12 |
| | Config 2, 5 | | 5 | -3 | -12 | -12 | -12 |
| | Config 3, 6 | | 5 | -3 | -12 | -12 | -12 |
| SNR_CSI-RS of set q_1 | Config 1, 4 | dB | -12 | -12 | 5 | 5 | 5 |
| | Config 2, 5 | | -12 | -12 | 5 | 5 | 5 |
| | Config 3, 6 | | -12 | -12 | 5 | 5 | 5 |
| N_{oc} | Config 1, 4 | dBm/15 KHz | -98 | | | | |
| | Config 2, 5 | | -98 | | | | |
| | Config 3, 6 | | -98 | | | | |
| Propagation condition | | | TDL-C 300ns 100Hz | | | | |
| <p>Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.</p> <p>Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.</p> <p>Note 4: Void</p> <p>Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.</p> <p>Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.</p> <p>Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.</p> <p>Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.</p> <p>Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.</p> | | | | | | | |

Table A.4.5.5.4.1-4: Void

Table A.4.5.5.4.1-5: Void

Table A.4.5.5.4.1-6: Void

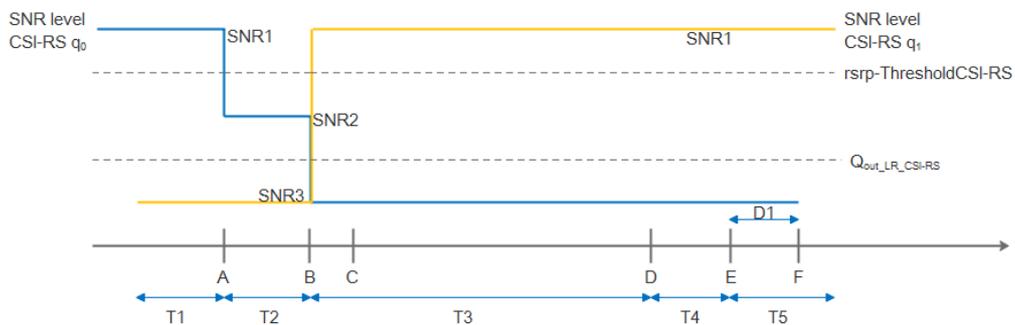


Figure A.4.5.5.4.1-1: SNR variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

A.4.5.5.4.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 1920 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.6 Active BWP switch

A.4.5.6.1 DCI-based and Timer-based Active BWP Switch

A.4.5.6.1.1 E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC

A.4.5.6.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in TS38.133 clause 8.6, and interruption requirement for E-UTRA victim cell defined in TS36.133 clause 7.32.2.7. Supported test configurations are shown in Table A.4.5.6.1.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) as given in Table A.4.5.6.1.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell is specified in Table A.4.5.6.1.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and the time duration of T2.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for PSCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell.
- UE is configured with a *bwp-InactivityTimer* timer value for PSCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for PSCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted i . The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell no later than at the beginning of the DL slot right after DL slot ($i+T_{BWPswitchDelay}+kI$). The UE shall be continuously scheduled on PSCell's BWP-2 starting from the beginning of the DL slot right after DL slot ($i+T_{BWPswitchDelay}$).

The starting time of PCell(Cell 1) interruption due to BWP switch on PSCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on PSCell(Cell 2).

During T3,

The time period T3 starts from the slot # j , where j is the beginning slot of the DL subframe immediately after the *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell at latest at the beginning of the DL slot right after DL slot ($j+T_{BWPswitchDelay}+kI$). The UE shall be continuously scheduled on PSCell's BWP-1 starting from the beginning of the DL slot right after DL slot ($j+T_{BWPswitchDelay}$).

The starting time of PCell(Cell 1) interruption due to BWP switch of PSCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in PSCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

The test equipment verifies that potential interruption to E-UTRA PCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell during BWP switch of PSCell, respectively.

Table A.4.5.6.1.1-1: DL BWP switch supported test configurations

| Config | Description |
|--|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note 1: The UE is only required to be tested in one of the supported test configurations. | |
| Note 2: A UE which fulfils the requirements in test case A.4.5.6.1.2 can skip the test cases in A.4.5.6.1.1. | |

Table A.4.5.6.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

| Parameter | Unit | Value | Comment |
|---|------|--------|--|
| E-UTRA RF Channel Number | | 1 | One E-UTRA radio channel is used for this test |
| NR RF Channel Number | | 2 | One NR radio channel is used for this test |
| Active PCell | | Cell 1 | PCell on RF channel number 1. |
| Active PSCell | | Cell 2 | PSCell on RF channel number 2. |
| CP length | | Normal | |
| DRX | | OFF | For both PCell and PSCell |
| <i>bwp-InactivityTimer</i> | ms | [200] | |
| Cell-individual offset for cells on RF channel number 1 | dB | 0 | Individual offset for cells on PCC. |
| Cell-individual offset for cells on RF channel number 2 | dB | 0 | Individual offset for cells on PSCC. |
| Cell2 timing offset to cell1 | μs | 3 | Synchronous EN-DC |
| T1 | s | [0.2] | |
| T2 | s | [0.2] | |
| T3 | s | [0.2] | |

Table A4.5.6.1.1-3: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

| Parameter | | Unit | Cell 2 |
|-------------------------------------|----------------|------|---------------------------------|
| Frequency Range | | | FR1 |
| Duplex mode | Config 1,4 | | FDD |
| | Config 2,3,5,6 | | TDD |
| TDD configuration | Config 1,4 | | Not Applicable |
| | Config 2,5 | | TDDConf.1.1 |
| | Config 3,6 | | TDDConf.1.2 |
| BW _{channel} | Config 1,4 | | 10 MHz: N _{RB,c} = 52 |
| | Config 2,5 | | 10 MHz: N _{RB,c} = 52 |
| | Config 3,6 | | 40 MHz: N _{RB,c} = 106 |
| Active BWP ID | | | 1, 2 |
| Initial DL BWP Configuration | Config 1,4 | | DLBWP.0.2 ^{Note 4} |
| | Config 2,5 | | |
| | Config 3,6 | | |
| Active DL BWP-1 Configuration | Config 1,4 | | DLBWP.1.1 ^{Note 4} |
| | Config 2,5 | | |
| | Config 3,6 | | |
| Active DL BWP-2 Configuration | Config 1,4 | | DLBWP.1.3 ^{Note 4} |
| | Config 2,5 | | |
| | Config 3,6 | | |
| Initial UL BWP Configuration | Config 1,4 | | ULBWP.0.2 ^{Note 4} |
| | Config 2,5 | | |
| | Config 3,6 | | |
| Active UL BWP-1 Configuration | Config 1,4 | | ULBWP.1.1 ^{Note 4} |
| | Config 2,5 | | |
| | Config 3,6 | | |
| Active UL BWP-2 Configuration | Config 1,4 | | ULBWP.1.3 ^{Note 4} |
| | Config 2,5 | | |
| | Config 3,6 | | |
| PDSCH Reference measurement channel | Config 1,4 | | SR.1.1 FDD |
| | Config 2,5 | | SR.1.1 TDD |
| | Config 3,6 | | SR.2.1 TDD |
| | Config 1,4 | | CR.1.1 FDD |

| | | | |
|--|----------------|------------------|-------------|
| RMSI CORESET parameters | Config 2,5 | | CR.1.1 TDD |
| | Config 3,6 | | CR.2.1 TDD |
| Dedicated CORESET parameters | Config 1,4 | | CCR.1.1 FDD |
| | Config 2,5 | | CCR.1.1 TDD |
| | Config 3,6 | | CCR.2.1 TDD |
| OCNG Patterns | | | OP.1 |
| SSB Configuration | Config 1,2,4,5 | | SSB.1 FR1 |
| | Config 3,6 | | SSB.2 FR1 |
| SMTC Configuration | | | SMTC.1 |
| Correlation Matrix and Antenna Configuration | | | 1x2 Low |
| TRS Configuration | Config 1,4 | | TRS.1.1 FDD |
| | Config 2,5 | | TRS.1.1 TDD |
| | Config 3,6 | | TRS.1.2 TDD |
| EPRE ratio of PSS to SSS | | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | |
| N_{oc} ^{Note 2} | Config 1,2,4,5 | | |
| | Config 3,6 | [-101] | |
| N_{oc} ^{Note 2} | | dBm/15kHz | [-104] |
| SS-RSRP ^{Note 3} | Config 1,2,4,5 | dBm/SCS | [-87] |
| | Config 3,6 | | [-90] |
| \hat{E}_s/I_{ot} | | dB | [17] |
| \hat{E}_s/N_{oc} | | dB | [17] |
| I_o ^{Note 3} | Config 1,2,4,5 | dBm/ 9.36MHz | [-59] |
| | Config 3,6 | dBm/ 38.16MHz | [-61.9] |
| Propagation Condition | | | AWGN |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].</p> | | | |

A.4.5.6.1.1.2 Test Requirements

During T1, the UE shall start to send the ACK for PSCell in the DL slot right after DL slot $(i+T_{BWPswitchDelay}+kI)$.

During T3, the UE shall start to send the ACK for PSCell in the DL slot right after DL slot $(j+T_{BWPswitchDelay}+kI)$.

Where, kI is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start time of PCell interruption during PSCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start time of PCell interruption of during PSCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in TS36.133 Clause 7.32.2.7.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after DL slot $(i+T_{BWPswitchDelay+kI})$, $(j+T_{BWPswitchDelay+kI})$, then the UE shall use the next available uplink resource for reporting the corresponding ACK.

A.4.5.6.1.2 E-UTRAN – NR PSCell FR1 DL active BWP switch with FR1 SCell in non-DRX in synchronous EN-DC

A.4.5.6.1.2.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6, and interruption requirements for NR victim cell defined in clause 8.2.1.2.7 and interruption requirement for E-UTRA victim cell defined in clause 7.32.2.7 of TS 36.133 [15]. Supported test configurations are shown in Table A.4.5.6.1.2.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), one NR PSCell (Cell 2) and one NR SCell (Cell 3) as given in Table A.4.5.6.1.2.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and SCell are specified in Table A.4.5.6.1.2.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) and SCell (Cell 3) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and the time duration of T2.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC) and Cell 3 (SCell) on radio channel 3 (SCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for PSCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for SCell, BWP-0 in Cell 3 before starting the test.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in SCell.

- UE is configured with a *bwp-InactivityTimer* timer value for PSCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for PSCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted i . The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell no later than at the beginning of the DL slot right after slot ($i+T_{BWPswitchDelay}+kI$). The UE shall be continuously scheduled on PSCell's BWP-2 starting from the beginning of the DL slot right after slot ($i+T_{BWPswitchDelay}$).

PCell(Cell 1) interruption due to BWP switch on PSCell shall occur within the BWP switch delay.

SCell(Cell 3) interruption due to BWP switch on PSCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on PSCell(Cell 2).

During T3,

The time period T3 starts from the slot # j , where j is the beginning slot of the DL subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell at latest at the beginning of the DL slot right after slot ($j+T_{BWPswitchDelay}+kI$). The UE shall be continuously scheduled on PSCell's BWP-1 starting from the beginning of the DL slot right after slot ($j+T_{BWPswitchDelay}$).

PCell(Cell 1) interruption due to BWP switch of PSCell shall occur within the BWP switch delay.

SCell(Cell 3) interruption due to BWP switch of PSCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in PSCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

The test equipment verifies that potential interruption to E-UTRA PCell and NR SCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell and SCell during BWP switch of PSCell, respectively.

Table A.4.5.6.1.2.1-1: DL BWP switch supported test configurations

| Config | Description |
|---------|--|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note 1: | The UE is only required to be tested in one of the supported test configurations |
| Note 2: | A UE which fulfils the requirements in test case A.4.5.6.1.2 can skip the test cases in A.4.5.6.1.1. |
| Note 3: | NR configuration is the same for PSCell and SCells. |

Table A.4.5.6.1.2.1-2: General test parameters for DL BWP switch in synchronous EN-DC

| Parameter | Unit | Value | Comment |
|---|------|--------|--|
| E-UTRA RF Channel Number | | 1 | One E-UTRA radio channel is used for this test |
| NR RF Channel Number | | 2, 3 | Two NR radio channel is used for this test |
| Active PCell | | Cell 1 | PCell on RF channel number 1. |
| Active PSCell | | Cell 2 | PSCell on RF channel number 2. |
| Active SCell | | Cell 3 | SCell on RF channel number 3. |
| CP length | | Normal | |
| DRX | | OFF | |
| <i>bwp-InactivityTimer</i> | ms | [200] | |
| Cell-individual offset for cells on RF channel number 1 | dB | 0 | Individual offset for cells on PCC. |
| Cell-individual offset for cells on RF channel number 2 | dB | 0 | Individual offset for cells on PSCC. |
| Cell-individual offset for cells on RF channel number 3 | dB | 0 | Individual offset for cells on SCC. |
| Cell2 timing offset to cell1 | µs | 3 | Synchronous EN-DC |
| Cell3 timing offset to cell2 | µs | 3 | Synchronous cells |
| T1 | s | [0.2] | |
| T2 | s | [0.2] | |
| T3 | s | [0.2] | |

Table A.4.5.6.1.2.1-3: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

| Parameter | | Unit | Cell 2 | Cell 3 |
|-------------------------------------|----------------|------|---------------------------------|-----------|
| Frequency Range | | | FR1 | |
| Duplex mode | Config 1,4 | | FDD | |
| | Config 2,3,5,6 | | TDD | |
| TDD configuration | Config 1,4 | | Not Applicable | |
| | Config 2,5 | | TDDConf.1.1 | |
| | Config 3,6 | | TDDConf.1.2 | |
| BW _{channel} | Config 1,4 | | 10 MHz: N _{RB,c} = 52 | |
| | Config 2,5 | | 10 MHz: N _{RB,c} = 52 | |
| | Config 3,6 | | 40 MHz: N _{RB,c} = 106 | |
| Active BWP ID | | | 1, 2 | 0 |
| Initial BWP Configuration | Config 1,4 | | DLBWP.0.2 | DLBWP.0.2 |
| | Config 2,5 | | | |
| | Config 3,6 | | | |
| Active BWP-0 Configuration | Config 1,4 | | NA | DLBWP.0.2 |
| | Config 2,5 | | | |
| | Config 3,6 | | | |
| Active BWP-1 Configuration | Config 1,4 | | DLBWP.1.3 | NA |
| | Config 2,5 | | | |
| | Config 3,6 | | | |
| Active BWP-2 Configuration | Config 1,4 | | DLBWP.1.1 | NA |
| | Config 2,5 | | | |
| | Config 3,6 | | | |
| PDSCH Reference measurement channel | Config 1,4 | | SR.1.1 FDD | |
| | Config 2,5 | | SR.1.1 TDD | |
| | Config 3,6 | | SR2.1 TDD | |
| RMSI CORESET parameters | Config 1,4 | | CR.1.1 FDD | |
| | Config 2,5 | | CR.1.1 TDD | |
| | Config 3,6 | | CR2.1 TDD | |

| | | | | |
|--|----------------|--------------|-------------|---------|
| Dedicated CORESET parameters | Config 1,4 | | CCR.1.1 FDD | |
| | Config 2,5 | | CCR.1.1 TDD | |
| | Config 3,6 | | CCR.2.1 TDD | |
| OCNG Patterns | | | OP.1 | |
| SSB Configuration | Config 1,2,4,5 | | SSB.1 FR1 | |
| | Config 3,6 | | SSB.2 FR1 | |
| SMTTC Configuration | | | SMTTC.1 | |
| TRS Configuration | Config 1,4 | | TRS.1.1 FDD | |
| | Config 2,5 | | TRS.1.1 TDD | |
| | Config 3,6 | | TRS.1.2 TDD | |
| Antenna Configuration | | | 1x2 | |
| Propagation Condition | | | AWGN | |
| EPRE ratio of PSS to SSS | | dB | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | | |
| N_{oc} ^{Note 2} | | dBm/15 kHz | [-104] | [-104] |
| SS-RSRP ^{Note 3} | | dBm/15 kHz | [-87] | [-87] |
| \bar{E}_s/I_{ot} | | dB | 17 | 17 |
| \bar{E}_s/N_{oc} | | dB | 17 | 17 |
| I_o ^{Note 3} | Config 1,2,4,5 | dBm/9.36MHz | [-59] | [-59] |
| | Config 3,6 | dBm/38.16MHz | [-61.9] | [-61.9] |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].</p> | | | | |

A.4.5.6.1.2.2 Test Requirements

During T1, the UE shall start to send the ACK for PSCell in the DL slot right after slot $(i+T_{BWPswitchDelay}+kI)$.

During T3, the UE shall start to send the ACK for PSCell in the DL slot right after slot $(j+T_{BWPswitchDelay}+kII)$.

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start of the interruption of PCell during PSCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of PCell during PSCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in clause 7.32.2.7 of TS 36.133 [15].

During T1, the start of the interruption of SCell during PSCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of SCell during PSCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of SCell shall not be longer than the interruption duration specified for active BWP switch in clause 8.6.2.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after slot $(i+T_{BWPswitchDelay}+kI)$, $(j+T_{BWPswitchDelay}+kI)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK.

Editor's note: FFS value of kI for type 1 and type 2 UE.

A.4.5.6.2 RRC-based Active BWP Switch

A.4.5.6.2.1 E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC

A.4.5.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6.3. Supported test configurations are shown in Table A.4.5.6.2.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1) and one NR PSCell (Cell 2) as given in Table A.4.5.6.2.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell are specified in Table A.4.5.6.2.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC) and to Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1 (PSCell).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is completely received at the UE side in PSCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part configuration.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i + T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$) as defined in clause 8.6.3 and be ready for the reception of uplink grant for the PSCell no later than at the beginning of the DL slot right after slot ($i + T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$). The UE shall be continuously scheduled on PSCell's BWP-1 starting from the beginning of the DL slot right after slot ($i + T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$).

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in clause 8.6.3.

The test equipment verifies the DL BWP switch time in PSCell by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when RRC Reconfiguration Complete message is received.

Table A.4.5.6.2.1.1-1: DL BWP switch supported test configurations

| Config | Description |
|--------|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |

Note 1: The UE is only required to be tested in one of the supported test configurations

Table A.4.5.6.2.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

| Parameter | Unit | Value | Comment |
|---|------|--------|--|
| E-UTRA RF Channel Number | | 1 | One E-UTRA radio channel is used for this test |
| NR RF Channel Number | | 2 | One NR radio channel is used for this test |
| Active PCell | | Cell 1 | PCell on RF channel number 1. |
| Active PSCell | | Cell 2 | PSCell on RF channel number 2. |
| CP length | | Normal | |
| DRX | | OFF | |
| Cell-individual offset for cells on RF channel number 1 | dB | 0 | Individual offset for cells on PCC. |
| Cell-individual offset for cells on RF channel number 2 | dB | 0 | Individual offset for cells on PSCC. |
| Cell2 timing offset to cell1 | μs | 3 | Synchronous EN-DC |
| T1 | s | [0.2] | |

Table A.4.5.6.2.1.1-3: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

| Parameter | | Unit | Cell 2 |
|-------------------------------------|-------------------------------|------------|---------------------------------|
| Frequency Range | | | FR1 |
| Duplex mode | Config 1,4 | | FDD |
| | Config 2,3,5,6 | | TDD |
| TDD configuration | Config 1,4 | | Not Applicable |
| | Config 2,5 | | TDDConf.1.1 |
| | Config 3,6 | | TDDConf.1.2 |
| BW _{channel} | Config 1,4 | | 10 MHz: N _{RB,c} = 52 |
| | Config 2,5 | | 10 MHz: N _{RB,c} = 52 |
| | Config 3,6 | | 40 MHz: N _{RB,c} = 106 |
| Active DL BWP ID | | | 1 |
| Initial DL BWP Configuration | Config 1,4 | | DLBWP.0.2 |
| | Config 2,5 | | |
| | Config 3,6 | | |
| Initial UL BWP Configuration | Config 1,4 | | ULBWP.0.2 |
| | Config 2,5 | | |
| | Config 3,6 | | |
| Initial Condition | Active DL BWP-1 Configuration | Config 1,4 | DLBWP.1.3 |
| | | Config 2,5 | |
| | | Config 3,6 | |
| | Active UL BWP-1 Configuration | Config 1,4 | ULBWP.1.3 |
| | | Config 2,5 | |
| | | Config 3,6 | |
| Final Condition | Active DL BWP-1 Configuration | Config 1,4 | DLBWP.1.1 |
| | | Config 2,5 | |
| | | Config 3,6 | |
| | Active UL BWP-1 Configuration | Config 1,4 | ULBWP.1.1 |
| | | Config 2,5 | |
| | | Config 3,6 | |
| Initial UL BWP Configuration | Config 1,4 | | ULBWP.0.2 |
| | Config 2,5 | | |
| | Config 3,6 | | |
| Active UL BWP-1 Configuration | Config 1,4 | | ULBWP.1.3 |
| | Config 2,5 | | |
| | Config 3,6 | | |
| Active UL BWP-2 Configuration | Config 1,4 | | ULBWP.1.1 |
| | Config 2,5 | | |
| | Config 3,6 | | |
| PDSCH Reference measurement channel | Config 1,4 | | SR.1.1 FDD |
| | Config 2,5 | | SR.1.1 TDD |
| | Config 3,6 | | SR2.1 TDD |
| RMSI CORESET parameters | Config 1,4 | | CR.1.1 FDD |
| | Config 2,5 | | CR.1.1 TDD |
| | Config 3,6 | | CR2.1 TDD |
| Dedicated CORESET parameters | Config 1,4 | | CCR.1.1 FDD |
| | Config 2,5 | | CCR.1.1 TDD |
| | Config 3,6 | | CCR.2.1 TDD |
| OCNG Patterns | | | OP.1 |
| SSB Configuration | Config 1,2,4,5 | | SSB.1 FR1 |
| | Config 3,6 | | SSB.2 FR1 |
| SMTc Configuration | | | SMTc.1 |
| TRS Configuration | Config 1,4 | | TRS.1.1 FDD |
| | Config 2,5 | | TRS.1.1 TDD |
| | Config 3,6 | | TRS.1.2 TDD |
| Antenna Configuration | | | 1x2 |

| Propagation Condition | | | AWGN |
|--|----------------|------------------|---------|
| EPRE ratio of PSS to SSS | | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | |
| N_{oc} ^{Note 2} | | dBm/15 kHz | [-104] |
| SS-RSRP ^{Note 3} | | dBm/15 kHz | [-87] |
| \hat{E}_s/I_{ot} | | dB | 17 |
| \hat{E}_s/N_{oc} | | dB | 17 |
| I_o ^{Note3} | Config 1,2,4,5 | dBm/ 9.36MHz | [-59] |
| | Config 3,6 | dBm/ 38.16MHz | [-61.9] |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].</p> | | | |

A.4.5.6.2.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PSCell in the beginning of the DL slot right after slot ($i + T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$).

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.7 PSCell addition and release delay

A.4.5.7.1 Addition and Release Delay of known NR PSCell

A.4.5.7.1.1 Test purpose and environment

The purpose of this test is to verify that the NR PSCell addition and release delays under EN-DC are within the requirements stated in clause 7.31.2 [15] for the case when the PSCell is known by the UE at the time of addition.

Supported test configurations are shown in A.4.5.7.1.1-1. The test parameters for the E-UTRA cell are given in Table A.3.7.2.1-1. The E-UTRA cell once set up is not changed across time.

The test parameters for NR cell are given in Tables A.4.5.7.1.1-2 and cell-specific parameters in A.4.5.7.1.1-3 below. The test consists of five successive time periods with duration of T1, T2, T3, T4 and T5 respectively. There are two carriers each with one cell. Before the test starts the UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC) but is not aware of Cell 2 (NR PSCell) on radio channel 2. The UE is only monitoring the PCC. During T1 only Cell1 is known to the UE.

Before the start of T2, the UE in the measurement control information that event-triggered reporting with Event A4 is configured for neighbour cell (Cell2). Before the start of T2 the UE is configured with the measurement gaps (gap pattern Id # 0). The Cell2 becomes known to the UE during T2. Therefore, during T2 the UE shall report Event A4. After receiving the Event A4, the test system shall send a RRC message to the UE to release the measurement gaps.

The test system shall send a RRC message to the UE to add PSCell (Cell 2) on radio channel 2. The RRC message (to add PSCell) also includes a request for the UE to start periodic CSI reporting for the PSCell after the PSCell has been successfully added. The RRC message to add PSCell shall be sent to the UE during period T2, after the measurement gaps are released by the test system. The point in time at which the RRC message to add PSCell (Cell2) is received at the UE antenna connector defines the start of period T3.

The test system shall observe the periodic reporting of CSI for PSCell during T4. The point in time at which the UE has sent PRACH to the PSCell (Cell 2) defines the start of period T4.

The test system shall send a RRC message to the UE to release PSCell (Cell 2) on radio channel 2. The RRC message to release PSCell (Cell2) shall be sent to the UE during period T4, after the UE has sent at least one CQI report with non-zero CQI index for PSCell (Cell 2). The point in time at which the RRC message to release PSCell (Cell2) is received at the UE antenna connector defines the start of period T5.

Table A.4.5.7.1.1-1: Supported test configurations for FR1 PSCell

| Configuration | Description |
|---------------|--|
| 1 | LTE FDD, NR SCS 15 kHz, BW 10 MHz, FDD |
| 2 | LTE FDD, NR SCS 15 kHz, BW 10 MHz, TDD |
| 3 | LTE FDD, NR SCS 30 kHz, BW 40 MHz, TDD |
| 4 | LTE TDD, NR SCS 15 kHz, BW 10 MHz, FDD |
| 5 | LTE TDD, NR SCS 15 kHz, BW 10 MHz, TDD |
| 6 | LTE TDD, NR SCS 30 kHz, BW 40 MHz, TDD |
| Note: | The UE is only required to pass in one of the supported test configurations in FR1 |

Table A.4.5.7.1.1-2: General Test Parameters for PSCell Addition and Release

| Parameter | Unit | Value | Comment | |
|-------------------|-----------------|-------|---|--|
| RF Channel Number | | 1, 2 | Two radio channels are used for this test. One for E-UTRA cell and second for NR Cell | |
| Initial Condition | Active PCell | Cell1 | PCell on RF channel number 1. | |
| | Neighbour cell | Cell2 | Neighbour cell on RF channel number 2. | |
| Final Condition | Active PCell | Cell1 | PCell on RF channel number 1. | |
| | Neighbour Cell | Cell2 | PSCell released on RF channel number 2. | |
| B1 | Hysteresis | dB | 0 | Hysteresis for evaluation of event B1. |
| | Threshold RSRP | dBm | -93 | Actual RSRP threshold for event B1. Needs to take absolute accuracy tolerance in clause 9.1.11.1 into account plus margin. |
| | Time to Trigger | S | 0 | |

| | | | |
|---|----|---------------------------|--|
| DRX | | OFF | Continuous monitoring of primary cell |
| Measurement gap pattern Id | | 0 | Gaps are configured before T2 and released before T3. |
| PRACH configuration on cell2 | | FR1 PRACH configuration 2 | Captured in A.3.8.2.1 |
| CQI/PMI periodicity and offset configuration index on cell2 | | [2ms] | CQI reporting for PSCell every uplink subframe |
| Cell-individual offset for cells on RF channel number 1 | dB | 0 | Individual offset for cells on primary component carrier. |
| Cell-individual offset for cells on RF channel number 2 | dB | 0 | Individual offset for cells on carrier frequency of cell2. |
| T1 | s | 1 | During this time the PCell shall be known and cell2 shall be unknown. |
| T2 | s | 1 | During this time the UE shall identify neighbour cell (cell2) and report event B1. |
| T3 | s | 0.5 | During this time the UE adds the PSCell. |
| T4 | s | 0.5 | During this time the UE sends CSI reports for PSCell. |
| T5 | s | 0.5 | During this time the UE releases the PSCell. |

Table A.4.5.7.1.1-3: Cell Specific Parameters for PSCell Addition and Release

| Parameter | Unit | Config | Test | | | | |
|-------------------------------------|------|-------------|-----------------------------|----|----|----|----|
| | | | T1 | T2 | T3 | T4 | T5 |
| E-UTRA RF Channel Number | | 1,2,3,4,5,6 | 1 | | | | |
| NR RF Channel Number | | 1,2,3,4,5,6 | 2 | | | | |
| TDD configuration | | 1,4 | Not Applicable | | | | |
| | | 2,5 | TDDConf.1.1 | | | | |
| | | 3,6 | TDDConf.1.2 | | | | |
| BW _{channel} | MHz | 1,4 | 10: N _{RB,c} = 52 | | | | |
| | | 2,5 | 10: N _{RB,c} = 52 | | | | |
| | | 3,6 | 40: N _{RB,c} = 106 | | | | |
| Initial BWP Configuration | | 1,2,3 | DLBWP.0.1 ULBWP.0.1 | | | | |
| Dedicated BWP Configuration | | 1,2,3 | DLBWP.1.1 ULBWP.1.1 | | | | |
| PDSCH Reference measurement channel | | 1,4 | SR.1.1 FDD | | | | |
| | | 2,5 | SR.1.1 TDD | | | | |
| | | 3,6 | SR.2.1 TDD | | | | |
| RMSI CORESET Reference Channel | | 1,4 | CR.1.1 FDD | | | | |
| | | 2,5 | CR.1.1 TDD | | | | |
| | | 3,6 | CR.2.1 TDD | | | | |
| Dedicated CORESET Reference Channel | | 1,4 | CCR.1.1 FDD | | | | |
| | | 2,5 | CCR.1.1 TDD | | | | |
| | | 3,6 | CCR.2.1 TDD | | | | |
| OCNG Patterns | | 1,2,3,4,5,6 | OP.1 | | | | |
| SSB configuration | | 1,2,4,5 | SSB.1 FR1 | | | | |
| | | 3,6 | SSB.2 FR1 | | | | |

| | | | | |
|--|-------------|-------------|-------------|-----|
| SMTC configuration | | 1,2,4,5 | SMTC.1 | |
| | | 3,6 | SMTC.1 | |
| TRS Configuration | | 1,4 | TRS.1.1 FDD | |
| | | 2,5 | TRS.1.1 TDD | |
| | | 3,6 | TRS.1.2 TDD | |
| EPRE ratio of PSS to SSS | dB | 1,2,3,4,5,6 | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | |
| N_{oc} ^{Note2} | | | | |
| N_{oc} ^{Note2} | dBm/SCS | 1,2,4,5 | N/A | -85 |
| | | 3,6 | N/A | -82 |
| \hat{E}_s / I_{ot} | | 1,2,3,4,5,6 | -infinity | 0 |
| \hat{E}_s / N_{oc} | | 1,2,3,4,5,6 | -infinity | 0 |
| SS-RSRP ^{Note3} | dBm/SCS | 1,2,4,5 | -infinity | -85 |
| | | 3,6 | -infinity | -82 |
| I_o ^{Note3} | dBm/9.36MHz | 1,2,4,5 | N/A | -57 |
| | dBm/38.1MHz | 3,6 | N/A | -51 |
| Propagation condition | | 1,2,3,4,5,6 | AWGN | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> | | | | |

A.4.5.7.1.2 Test Requirements

The UE shall transmit the PRACH to PSCell at latest 82 ms^{Note1} into T3.

The UE shall send at least one CSI report for PSCell with non-zero CQI index during T4.

The UE shall periodically send CSI reports for PSCell after the UE has sent first CQI report with non-zero CQI index during T4

The UE shall stop sending CSI reports for PSCell in at latest [20]ms into T5.

All the above test requirements shall be fulfilled in order for the observed PSCell addition delay and PSCell release delay to be counted as correct. The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90%.

Note1: The PSCell addition delay can be expressed as follows as specified in clause 7.31.2 [15]:

$$T_{\text{config_PSCell}} = T_{\text{RRC_delay}} + T_{\text{processing}} + T_{\text{search}} + T_{\Delta} + T_{\text{PSCell_DU}} + 2\text{ms}$$

Where:

$$T_{\text{RRC_delay}} = 20\text{ms}$$

$$T_{\text{processing}} = 20\text{ms}$$

$$T_{\text{search}} = 0$$

$$T_{\Delta} = 20\text{ms}$$

$$T_{\text{PSCell_DU}} = 1 * 10 + 10 = 20\text{ms}$$

A.4.6 Measurement procedure

A.4.6.1 Intra-frequency Measurements

A.4.6.1.1 EN-DC event triggered reporting tests without gap under non-DRX

A.4.6.1.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2.

A.4.6.1.1.2 Test parameters

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters for PSCell are given in Table A.4.6.1.1.2-1, A.4.6.1.1.2-2, A.4.6.1.1.2-3 below and the test parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

Table A.4.6.1.1.2-1: Supported test configurations

| Configuration | Description |
|---|---|
| 1 | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations. | |

Table A.4.6.1.1.2-2: General test parameters for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1

| Parameter | Unit | Test configuration | Value | Comment |
|---|------|--------------------|-----------------------------------|---|
| Active cell | | 1, 2, 3 | E-UTRAN Cell 1 and NR Cell 2 | |
| Neighbour cell | | 1, 2, 3 | NR Cell 3 | Cell to be identified. |
| RF Channel Number | | 1, 2, 3 | 1: Cell 1 2: Cell 2 and Cell 3 | |
| SSB configuration | | 1 | SSB.1 FR1 | |
| | | 2 | SSB.1 FR1 | |
| | | 3 | SSB.2 FR1 | |
| SMTC configuration | | 1 | SMTC.2 | |
| | | 2 | SMTC.1 | |
| | | 3 | SMTC.1 | |
| A3-Offset | dB | 1, 2, 3 | -4.5 | |
| CP length | | 1, 2, 3 | Normal | |
| Hysteresis | dB | 1, 2, 3 | 0 | |
| Time To Trigger | s | 1, 2, 3 | 0 | |
| Filter coefficient | | 1, 2, 3 | 0 | L3 filtering is not used |
| DRX | | 1, 2, 3 | N/A | OFF |
| Time offset between PCell and PSCell | | 1, 2, 3 | 3 μ s | Synchronous EN-DC |
| Time offset between serving and neighbour cells | | 1 | 3 ms | Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2. |
| | | 2 | 3 μ s | Synchronous cells |
| | | 3 | 3 μ s | Synchronous cells |
| T1 | s | 1, 2, 3 | 5 | |
| T2 | s | 1, 2, 3 | 5 | |

Table A.4.6.1.1.2-3: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1

| Parameter | Unit | Test configuration | Cell 2 | | Cell 3 | |
|--------------------------------|------|--------------------|-------------|----|-------------|----|
| | | | T1 | T2 | T1 | T2 |
| TDD configuration | | 1 | N/A | | N/A | |
| | | 2 | TDDConf.1.1 | | TDDConf.1.1 | |
| | | 3 | TDDConf.2.1 | | TDDConf.2.1 | |
| PDSCH RMC configuration | | 1 | SR.1.1 FDD | | N/A | |
| | | 2 | SR.1.1 TDD | | | |
| | | 3 | SR.2.1 TDD | | | |
| RMSI CORESET RMC configuration | | 1 | CR.1.1 FDD | | CR.1.1 FDD | |
| | | 2 | CR.1.1 TDD | | CR.1.1 TDD | |
| | | 3 | CR.2.1 TDD | | CR.2.1 TDD | |

| | | | | | | |
|---|---------------|---------|------------------------|------------------------|-----------|--------|
| Dedicated CORESET RMC configuration | | 1 | CCR.1.1 FDD | CCR.1.1 FDD | | |
| | | 2 | CCR.1.1 TDD | CCR.1.1 TDD | | |
| | | 3 | CCR.2.1 TDD | CCR.2.1 TDD | | |
| OCNG Patterns | | 1, 2, 3 | OP.1 | OP.1 | | |
| TRS configuration | | 1 | TRS.1.1 FDD | N/A | | |
| | | 2 | TRS.1.1 TDD | N/A | | |
| | | 3 | TRS.1.2 TDD | N/A | | |
| Initial BWP configuration | | 1, 2, 3 | DLBWP.0.1 ULBWP.0.1 | DLBWP.0.1 ULBWP.0.1 | | |
| Active DL BWP configuration | | 1, 2, 3 | DLBWP.1.1 | DLBWP.1.1 | | |
| Active UL BWP configuration | | 1, 2, 3 | ULBWP.1.1 | ULBWP.1.1 | | |
| RLM-RS | | 1, 2, 3 | SSB | SSB | | |
| N_{oc} ^{Note 2} | dBm/SCS | 1 | -98 | | | |
| | | 2 | -98 | | | |
| | | 3 | -95 | | | |
| N_{oc} ^{Note 2} | dBm/15 kHz | 1 | -98 | | | |
| | | 2 | | | | |
| | | 3 | | | | |
| \hat{E}_s/I_{ot} | dB | 1 | 4 | -1.46 | -Infinity | -1.46 |
| | | 2 | | | | |
| | | 3 | | | | |
| \hat{E}_s/N_{oc} | dB | 1 | 4 | 4 | -Infinity | 4 |
| | | 2 | | | | |
| | | 3 | | | | |
| SS-RSRP ^{Note 3} | dBm/SCS kHz | 1 | -94 | -94 | -Infinity | -94 |
| | | 2 | -94 | -94 | -Infinity | -94 |
| | | 3 | -91 | -91 | -Infinity | -91 |
| I _o | dBm/9.36 MHz | 1 | -64.60 | -62.25 | -64.60 | -62.25 |
| | dBm/9.36 MHz | 2 | -64.60 | -62.25 | -64.60 | -62.25 |
| | dBm/38.16 MHz | 3 | -58.50 | -56.16 | -58.50 | -56.16 |
| Propagation Condition | | 1, 2, 3 | AWGN | | | |
| <p>Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | |

A.4.6.1.1.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.1.2 EN-DC event triggered reporting tests without gap under DRX

A.4.6.1.2.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2.

A.4.6.1.2.2 Test parameters

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters for PSCell are given in Table A.4.6.1.2.1-1, A.4.6.1.2.1-2, A.4.6.1.2.1-3 and A.4.6.1.2.1-4 below and the test parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.4.6.1.2.2-1: Supported test configurations

| Configuration | Description |
|---|---|
| 1 | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations. | |

Table A.4.6.1.2.2-2: General test parameters for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1 with DRX

| Parameter | Unit | Test configuration | Value | | Comment |
|--------------------|------|--------------------|-----------------------------------|--------|------------------------|
| | | | Test 1 | Test 2 | |
| Active cell | | 1, 2, 3 | E-UTRAN Cell 1 and NR Cell 2 | | |
| Neighbour cell | | 1, 2, 3 | NR Cell 3 | | Cell to be identified. |
| RF Channel Number | | 1, 2, 3 | 1: Cell 1 2: Cell 2 and Cell 3 | | |
| SSB configuration | | 1 | SSB.1 FR1 | | |
| | | 2 | SSB.1 FR1 | | |
| | | 3 | SSB.2 FR1 | | |
| SMTC configuration | | 1 | SMTC.2 | | |
| | | 2 | SMTC.1 | | |
| | | 3 | SMTC.1 | | |

| | | | | | |
|---|----|---------|-----------|-------|---|
| A3-Offset | dB | 1, 2, 3 | -4.5 | | |
| CP length | | 1, 2, 3 | Normal | | |
| Hysteresis | dB | 1, 2, 3 | 0 | | |
| Time To Trigger | s | 1, 2, 3 | 0 | | |
| Filter coefficient | | 1, 2, 3 | 0 | | L3 filtering is not used |
| DRX | | 1, 2, 3 | DRX.1 | DRX.2 | |
| Time offset between PCell and PSCell | | 1, 2, 3 | 3 μ s | | Synchronous EN-DC |
| Time offset between serving and neighbour cells | | 1 | 3 ms | | Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2. |
| | | 2 | 3 μ s | | Synchronous cells |
| | | 3 | 3 μ s | | Synchronous cells |
| T1 | s | 1, 2, 3 | 5 | | |
| T2 | s | 1, 2, 3 | 5 | 10 | |

Table A.4.6.1.2.2-3: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1 with DRX

| Parameter | Unit | Test configuration | Cell 2 | | Cell 3 | |
|-------------------------------------|------------|--------------------|------------------------|-------|------------------------|-------|
| | | | T1 | T2 | T1 | T2 |
| TDD configuration | | 1 | N/A | | N/A | |
| | | 2 | TDDConf.1.1 | | TDDConf.1.1 | |
| | | 3 | TDDConf.2.1 | | TDDConf.2.1 | |
| PDSCH RMC configuration | | 1 | SR.1.1 FDD | | N/A | |
| | | 2 | SR.1.1 TDD | | | |
| | | 3 | SR.2.1 TDD | | | |
| RMSI CORESET RMC configuration | | 1 | CR.1.1 FDD | | CR.1.1 FDD | |
| | | 2 | CR.1.1 TDD | | CR.1.1 TDD | |
| | | 3 | CR.2.1 TDD | | CR.2.1 TDD | |
| Dedicated CORESET RMC configuration | | 1 | CCR.1.1 FDD | | CCR.1.1 FDD | |
| | | 2 | CCR.1.1 TDD | | CCR.1.1 TDD | |
| | | 3 | CCR.2.1 TDD | | CCR.2.1 TDD | |
| OCNG Patterns | | 1, 2, 3 | OP.1 | | OP.1 | |
| TRS configuration | | 1 | TRS.1.1 FDD | | N/A | |
| | | 2 | TRS.1.1 TDD | | N/A | |
| | | 3 | TRS.1.2 TDD | | N/A | |
| Initial BWP configuration | | 1, 2, 3 | DLBWP.0.1 ULBWP.0.1 | | DLBWP.0.1 ULBWP.0.1 | |
| Active DL BWP configuration | | 1, 2, 3 | DLBWP.1.1 | | DLBWP.1.1 | |
| Active UL BWP configuration | | 1, 2, 3 | ULBWP.1.1 | | ULBWP.1.1 | |
| RLM-RS | | 1, 2, 3 | SSB | | SSB | |
| N_{oc} Note 2 | dBm/SCS | 1 | -98 | | | |
| | | 2 | -98 | | | |
| | | 3 | -95 | | | |
| N_{oc} Note 2 | dBm/15 kHz | 1 | -98 | | | |
| | | 2 | | | | |
| | | 3 | | | | |
| \hat{E}_s/I_{ot} | dB | 1 | 4 | -1.46 | -Infinity | -1.46 |
| | | 2 | | | | |
| | | 3 | | | | |
| \hat{E}_s/N_{oc} | dB | 1 | 4 | 4 | -Infinity | 4 |
| | | 2 | | | | |

| | | | | | | |
|---------------------------|--|---------|--------|--------|-----------|--------|
| | | 3 | | | | |
| SS-RSRP ^{Note 3} | dBm/SCS kHz | 1 | -94 | -94 | -Infinity | -94 |
| | | 2 | -94 | -94 | -Infinity | -94 |
| | | 3 | -91 | -91 | -Infinity | -91 |
| I _o | dBm/9.36 MHz | 1 | -64.60 | -62.25 | -64.60 | -62.25 |
| | dBm/9.36 MHz | 2 | -64.60 | -62.25 | -64.60 | -62.25 |
| | dBm/38.16 MHz | 3 | -58.50 | -56.16 | -58.50 | -56.16 |
| Propagation Condition | | 1, 2, 3 | AWGN | | | |
| Note 1: | The resources for uplink transmission are assigned to the UE prior to the start of time period T2. | | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | |
| Note 3: | SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | |

A.4.6.1.2.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 6400 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.1.3 EN-DC event triggered reporting tests with per-UE gaps under non-DRX

A.4.6.1.3.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.6.2 and 9.2.6.3.

A.4.6.1.3.2 Test parameters

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters for PSCell are given in Table A.4.6.1.3.1-1 and A.4.6.1.3.1-2 below and the test parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

There are two BWPs configured in Cell 2, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 2. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

Table A.4.6.1.3.2-1: Supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations. |

Table A.4.6.1.3.2-2: General test parameters for EN-DC intra-frequency event triggered reporting with per-UE gaps for PSCell in FR1

| Parameter | Unit | Test configuration | Value | Comment |
|---|------|--------------------|-----------------------------------|---|
| Active cell | | 1, 2, 3 | E-UTRAN Cell 1 and NR Cell 2 | |
| Neighbour cell | | 1, 2, 3 | NR Cell 3 | Cell to be identified. |
| RF Channel Number | | 1, 2, 3 | 1: Cell 1 2: Cell 2 and Cell 3 | |
| Measurement gap type | | 1, 2, 3 | Per-UE gaps | |
| Measurement gap repetition periodicity | ms | 1, 2, 3 | 40 | |
| Measurement gap length | ms | 1, 2, 3 | 6 | |
| Measurement gap offset | ms | 1, 2, 3 | 39 | |
| SSB configuration | | 1 | SSB.1 FR1 | |
| | | 2 | SSB.1 FR1 | |
| | | 3 | SSB.2 FR1 | |
| SMTC configuration | | 1 | SMTC.2 | |
| | | 2 | SMTC.1 | |
| | | 3 | SMTC.1 | |
| CSI-RS parameters | | 1 | CSI-RS.1.2 FDD | |
| | | 2 | CSI-RS.1.2 TDD | |
| | | 3 | CSI-RS.2.2 TDD | |
| A3-Offset | dB | 1, 2, 3 | -4.5 | |
| CP length | | 1, 2, 3 | Normal | |
| Hysteresis | dB | 1, 2, 3 | 0 | |
| Time To Trigger | s | 1, 2, 3 | 0 | |
| Filter coefficient | | 1, 2, 3 | 0 | L3 filtering is not used |
| DRX | | 1, 2, 3 | N/A | OFF |
| Time offset between PCell and PSCell | | 1, 2, 3 | 3 μ s | Synchronous EN-DC |
| Time offset between serving and neighbour cells | | 1 | 3 ms | Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2. |
| | | 2 | 3 μ s | Synchronous cells |
| | | 3 | 3 μ s | Synchronous cells |
| T1 | s | 1, 2, 3 | 5 | |
| T2 | s | 1, 2, 3 | 5 | |

Table A.4.6.1.3.2-3: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting with per-UE gaps for PSCell in FR1

| Parameter | Unit | Test configuration | Cell 2 | | Cell 3 | |
|-----------|------|--------------------|--------|----|--------|----|
| | | | T1 | T2 | T1 | T2 |
| | | | | | | |

| | | | | | | |
|---|---------------|---------|------------------------|--------|------------------------|--------|
| TDD configuration | | 1 | N/A | | N/A | |
| | | 2 | TDDConf.1.1 | | TDDConf.1.1 | |
| | | 3 | TDDConf.2.1 | | TDDConf.2.1 | |
| PDSCH RMC configuration | | 1 | SR.1.1 FDD | | N/A | |
| | | 2 | SR.1.1 TDD | | | |
| | | 3 | SR.2.1 TDD | | | |
| RMSI CORESET RMC configuration | | 1 | CR.1.1 FDD | | CR.1.1 FDD | |
| | | 2 | CR.1.1 TDD | | CR.1.1 TDD | |
| | | 3 | CR.2.1 TDD | | CR.2.1 TDD | |
| Dedicated CORESET RMC configuration | | 1 | CCR.1.1 FDD | | CCR.1.1 FDD | |
| | | 2 | CCR.1.1 TDD | | CCR.1.1 TDD | |
| | | 3 | CCR.2.1 TDD | | CCR.2.1 TDD | |
| OCNG Patterns | | 1, 2, 3 | OP.1 | | OP.1 | |
| TRS configuration | | 1 | TRS.1.1 FDD | | N/A | |
| | | 2 | TRS.1.1 TDD | | N/A | |
| | | 3 | TRS.1.2 TDD | | N/A | |
| Initial BWP configuration | | 1, 2, 3 | DLBWP.0.1 ULBWP.0.1 | | DLBWP.0.1 ULBWP.0.1 | |
| Active DL BWP configuration | | 1, 2, 3 | DLBWP.1.2 | | DLBWP.1.1 | |
| Active UL BWP configuration | | 1, 2, 3 | ULBWP.1.2 | | ULBWP.1.1 | |
| RLM-RS | | 1, 2, 3 | CSI-RS | | SSB | |
| N_{oc} ^{Note 2} | dBm/SCS | 1 | -98 | | | |
| | | 2 | -98 | | | |
| | | 3 | -95 | | | |
| N_{oc} ^{Note 2} | dBm/15 kHz | 1 | -98 | | | |
| | | 2 | | | | |
| | | 3 | | | | |
| \hat{E}_s/I_{ot} | dB | 1 | 4 | -1.46 | -Infinity | -1.46 |
| | | 2 | | | | |
| | | 3 | | | | |
| \hat{E}_s/N_{oc} | dB | 1 | 4 | 4 | -Infinity | 4 |
| | | 2 | | | | |
| | | 3 | | | | |
| SS-RSRP ^{Note 3} | dBm/SCS kHz | 1 | -94 | -94 | -Infinity | -94 |
| | | 2 | -94 | -94 | -Infinity | -94 |
| | | 3 | -91 | -91 | -Infinity | -91 |
| I _o | dBm/9.36 MHz | 1 | -64.60 | -62.25 | -64.60 | -62.25 |
| | dBm/9.36 MHz | 2 | -64.60 | -62.25 | -64.60 | -62.25 |
| | dBm/38.16 MHz | 3 | -58.50 | -56.16 | -58.50 | -56.16 |
| Propagation Condition | | 1, 2, 3 | AWGN | | | |
| <p>Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | |

A.4.6.1.3.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.1.4 EN-DC event triggered reporting tests with per-UE gaps under DRX

A.4.6.1.4.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2.6.2 and 9.2.6.3.

A.4.6.1.4.2 Test parameters

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters for PSCell are given in Table A.4.6.1.4.2-1, A.4.6.1.4.2-2, A.4.6.1.4.2-3 A.4.6.1.4.2-4 and A.4.6.1.4.2-5 below and the test parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

There are two BWPs configured in Cell 2, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 2. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.4.6.1.4.2-1: Supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations. |

Table A.4.6.1.4.2-2: General test parameters for EN-DC intra-frequency event triggered reporting with per-UE gaps for PSCell in FR1 with DRX

| Parameter | Unit | Test configuration | Value | | Comment |
|-----------|------|--------------------|--------|--------|---------|
| | | | Test 1 | Test 2 | |
| | | | | | |

| | | | | |
|---|----|---------|-----------------------------------|---|
| Active cell | | 1, 2, 3 | E-UTRAN Cell 1 and NR Cell 2 | |
| Neighbour cell | | 1, 2, 3 | NR Cell 3 | Cell to be identified. |
| RF Channel Number | | 1, 2, 3 | 1: Cell 1 2: Cell 2 and Cell 3 | |
| Measurement gap type | | 1, 2, 3 | Per-UE gaps | |
| Measurement gap repetition periodicity | ms | 1, 2, 3 | 40 | |
| Measurement gap length | ms | 1, 2, 3 | 6 | |
| Measurement gap offset | ms | 1, 2, 3 | 39 | |
| SSB configuration | | 1 | SSB.1 FR1 | |
| | | 2 | SSB.1 FR1 | |
| | | 3 | SSB.2 FR1 | |
| SMTC configuration | | 1 | SMTC.2 | |
| | | 2 | SMTC.1 | |
| | | 3 | SMTC.1 | |
| CSI-RS parameters | | 1 | CSI-RS.1.2 FDD | |
| | | 2 | CSI-RS.1.2 TDD | |
| | | 3 | CSI-RS.2.2 TDD | |
| A3-Offset | dB | 1, 2, 3 | -4.5 | |
| CP length | | 1, 2, 3 | Normal | |
| Hysteresis | dB | 1, 2, 3 | 0 | |
| Time To Trigger | s | 1, 2, 3 | 0 | |
| Filter coefficient | | 1, 2, 3 | 0 | L3 filtering is not used |
| DRX | | 1, 2, 3 | DRX.1 | DRX.2 |
| Time offset between PCell and PSCell | | 1, 2, 3 | 3 μ s | Synchronous EN-DC |
| Time offset between serving and neighbour cells | | 1 | 3 ms | Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2. |
| | | 2 | 3 μ s | Synchronous cells |
| | | 3 | 3 μ s | Synchronous cells |
| T1 | s | 1, 2, 3 | 5 | |
| T2 | s | 1, 2, 3 | 5 | 10 |

Table A.4.6.1.4.2-3: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting with per-UE gaps for PSCell in FR1 with DRX

| Parameter | Unit | Test configuration | Cell 2 | | Cell 3 | |
|-------------------------------------|------|--------------------|-------------|----|-------------|----|
| | | | T1 | T2 | T1 | T2 |
| TDD configuration | | 1 | N/A | | N/A | |
| | | 2 | TDDConf.1.1 | | TDDConf.1.1 | |
| | | 3 | TDDConf.2.1 | | TDDConf.2.1 | |
| PDSCH RMC configuration | | 1 | SR.1.1 FDD | | N/A | |
| | | 2 | SR.1.1 TDD | | | |
| | | 3 | SR.2.1 TDD | | | |
| RMSI CORESET RMC configuration | | 1 | CR.1.1 FDD | | CR.1.1 FDD | |
| | | 2 | CR.1.1 TDD | | CR.1.1 TDD | |
| | | 3 | CR.2.1 TDD | | CR.2.1 TDD | |
| Dedicated CORESET RMC configuration | | 1 | CCR.1.1 FDD | | CCR.1.1 FDD | |
| | | 2 | CCR.1.1 TDD | | CCR.1.1 TDD | |
| | | 3 | CCR.2.1 TDD | | CCR.2.1 TDD | |
| OCNG Patterns | | 1, 2, 3 | OP.1 | | OP.1 | |
| TRS configuration | | 1 | TRS.1.1 FDD | | N/A | |
| | | 2 | TRS.1.1 TDD | | N/A | |

| | | | | | | |
|---|---------------|---------|------------------------|--------|------------------------|--------|
| | | 3 | TRS.1.2 TDD | | N/A | |
| Initial BWP configuration | | 1, 2, 3 | DLBWP.0.1 ULBWP.0.1 | | DLBWP.0.1 ULBWP.0.1 | |
| Active DL BWP configuration | | 1, 2, 3 | DLBWP.1.2 | | DLBWP.1.1 | |
| Active UL BWP configuration | | 1, 2, 3 | ULBWP.1.2 | | ULBWP.1.1 | |
| RLM-RS | | 1, 2, 3 | CSI-RS | | SSB | |
| N_{oc} ^{Note 2} | dBm/SCS | 1 | -98 | | | |
| | | 2 | -98 | | | |
| | | 3 | -95 | | | |
| N_{oc} ^{Note 2} | dBm/15 KHz | 1 | -98 | | | |
| | | 2 | | | | |
| | | 3 | | | | |
| \hat{E}_s/I_{ot} | dB | 1 | 4 | -1.46 | -Infinity | -1.46 |
| | | 2 | | | | |
| | | 3 | | | | |
| \hat{E}_s/N_{oc} | dB | 1 | 4 | 4 | -Infinity | 4 |
| | | 2 | | | | |
| | | 3 | | | | |
| SS-RSRP ^{Note 3} | dBm/SCS KHz | 1 | -94 | -94 | -Infinity | -94 |
| | | 2 | -94 | -94 | -Infinity | -94 |
| | | 3 | -91 | -91 | -Infinity | -91 |
| Io | dBm/9.36 MHz | 1 | -64.60 | -62.25 | -64.60 | -62.25 |
| | dBm/9.36 MHz | 2 | -64.60 | -62.25 | -64.60 | -62.25 |
| | dBm/38.16 MHz | 3 | -58.50 | -56.16 | -58.50 | -56.16 |
| Propagation Condition | | 1, 2, 3 | AWGN | | | |
| <p>Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | |

A.4.6.1.4.3 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 6400 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.1.5 EN-DC event triggered reporting tests without gap under non-DRX with SSB index reading

A.4.6.1.5.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the FDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2.

A.4.6.1.5.2 Test parameters

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters for FDD PSCell are given in Table A.4.6.1.5.1-1 and A.4.6.1.5.1-2 below and the test parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

Table A.4.6.1.5.2-1: Supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |

Table A.4.6.1.5.2-2: General test parameters for EN-DC intra-frequency event triggered reporting without gap for FDD PSCell in FR1 with SSB index reading

| Parameter | Unit | Test configuration | Value | Comment |
|---|------|--------------------|-----------------------------------|---|
| Active cell | | 1 | E-UTRAN Cell 1 and NR Cell 2 | |
| Neighbour cell | | 1 | NR Cell 3 | Cell to be identified. |
| RF Channel Number | | 1 | 1: Cell 1 2: Cell 2 and Cell 3 | |
| SSB configuration | | 1 | SSB.1 FR1 | |
| SMTC configuration | | 1 | SMTC.2 | |
| A3-Offset | dB | 1 | -4.5 | |
| CP length | | 1 | Normal | |
| Hysteresis | dB | 1 | 0 | |
| Time To Trigger | s | 1 | 0 | |
| Filter coefficient | | 1 | 0 | L3 filtering is not used |
| DRX | | 1 | N/A | OFF |
| Time offset between PCell and PSCell | | 1 | 3 μ s | Synchronous EN-DC |
| Time offset between serving and neighbour cells | | 1 | 3 ms | Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2. |
| T1 | s | 1 | 5 | |
| T2 | s | 1 | 5 | |

Table A.4.6.1.5.1-3: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting without gap for FDD PSCell in FR1 with SSB index reading

| Parameter | Unit | Test configuration | Cell 2 | | Cell 3 | |
|---|--------------|--------------------|------------------------|--------|------------------------|--------|
| | | | T1 | T2 | T1 | T2 |
| TDD configuration | | 1 | N/A | | N/A | |
| PDSCH RMC configuration | | 1 | SR.1.1 FDD | | N/A | |
| RMSI CORESET RMC configuration | | 1 | CR.1.1 FDD | | CR.1.1 FDD | |
| Dedicated CORESET RMC configuration | | 1 | CCR.1.1 FDD | | CCR.1.1 FDD | |
| OCNG Patterns | | 1 | OP.1 | | OP.1 | |
| TRS configuration | | 1 | TRS.1.1 FDD | | N/A | |
| Initial BWP configuration | | 1 | DLBWP.0.1 ULBWP.0.1 | | DLBWP.0.1 ULBWP.0.1 | |
| Active DL BWP configuration | | 1 | DLBWP.1.1 | | DLBWP.1.1 | |
| Active UL BWP configuration | | 1 | ULBWP.1.1 | | ULBWP.1.1 | |
| RLM-RS | | 1 | SSB | | SSB | |
| N_{oc} Note 2 | dBm/SCS | 1 | -98 | | | |
| N_{oc} Note 2 | dBm/15 kHz | 1 | -98 | | | |
| \hat{E}_s/I_{ot} | dB | 1 | 4 | -1.46 | -Infinity | -1.46 |
| \hat{E}_s/N_{oc} | dB | 1 | 4 | 4 | -Infinity | 4 |
| SS-RSRP Note 3 | dBm/SCS kHz | 1 | -94 | -94 | -Infinity | -94 |
| I_o | dBm/9.36 MHz | 1 | -64.60 | -62.25 | -64.60 | -62.25 |
| Propagation Condition | | 1 | AWGN | | | |
| <p>Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | |

A.4.6.1.5.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.1.6 EN-DC event triggered reporting tests with SSB index reading with per-UE gaps

A.4.6.1.6.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2.6.2 and 9.2.6.3.

A.4.6.1.6.2 Test parameters

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters for PSCell are given in Table A.4.6.1.6.2-1 A.4.6.1.6.2-2 and A.4.6.1.6.2-3 below and the test parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

There are two BWPs configured in Cell 2, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 2. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

Table A.4.6.1.6.2-1: Supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |

Table A.4.6.1.6.2-2: General test parameters for EN-DC intra-frequency event triggered reporting with gap for PSCell in FR1 with SSB index reading

| Parameter | Unit | Test configuration | Value | Comment |
|---|------|--------------------|-----------------------------------|---|
| Active cell | | 1 | E-UTRAN Cell 1 and NR Cell 2 | |
| Neighbour cell | | 1 | NR Cell 3 | Cell to be identified. |
| RF Channel Number | | 1 | 1: Cell 1 2: Cell 2 and Cell 3 | |
| Measurement gap type | | 1 | Per-UE gaps | |
| Measurement gap repetition periodicity | ms | 1 | 40 | |
| Measurement gap length | ms | 1 | 6 | |
| Measurement gap offset | ms | 1 | 39 | |
| SSB configuration | | 1 | SSB.1 FR1 | |
| SMTC configuration | | 1 | SMTC.2 | |
| CSI-RS parameters | | 1 | CSI-RS.1.2 FDD | |
| A3-Offset | dB | 1 | -4.5 | |
| CP length | | 1 | Normal | |
| Hysteresis | dB | 1 | 0 | |
| Time To Trigger | s | 1 | 0 | |
| Filter coefficient | | 1 | 0 | L3 filtering is not used |
| DRX | | 1 | N/A | OFF |
| Time offset between PCell and PSCell | | 1 | 3 μ s | Synchronous EN-DC |
| Time offset between serving and neighbour cells | | 1 | 3 ms | Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2. |
| T1 | s | 1 | 5 | |
| T2 | s | 1 | 5 | |

Table A.4.6.1.6.2-3: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting with gap for PSCell in FR1 with SSB index reading

| Parameter | Unit | Test configuration | Cell 2 | | Cell 3 | |
|-----------|------|--------------------|--------|----|--------|----|
| | | | T1 | T2 | T1 | T2 |
| | | | | | | |

| | | | | | | |
|---|--------------|---|------------------------|--------|------------------------|--------|
| TDD configuration | | 1 | N/A | | N/A | |
| PDSCH RMC configuration | | 1 | SR.1.1 FDD | | N/A | |
| RMSI CORESET RMC configuration | | 1 | CR.1.1 FDD | | CR.1.1 FDD | |
| Dedicated CORESET RMC configuration | | 1 | CCR.1.1 FDD | | CCR.1.1 FDD | |
| OCNG Patterns | | 1 | OP.1 | | OP.1 | |
| TRS configuration | | 1 | TRS.1.1 FDD | | N/A | |
| Initial BWP configuration | | 1 | DLBWP.0.1 ULBWP.0.1 | | DLBWP.0.1 ULBWP.0.1 | |
| Active DL BWP configuration | | 1 | DLBWP.1.2 | | DLBWP.1.1 | |
| Active UL BWP configuration | | 1 | ULBWP.1.2 | | ULBWP.1.1 | |
| RLM-RS | | 1 | CSI-RS | | SSB | |
| N_{oc} ^{Note 2} | dBm/SCS | 1 | -98 | | | |
| N_{oc} ^{Note 2} | dBm/15 kHz | 1 | -98 | | | |
| \hat{E}_s/I_{ot} | dB | 1 | 4 | -1.46 | -Infinity | -1.46 |
| \hat{E}_s/N_{oc} | dB | 1 | 4 | 4 | -Infinity | 4 |
| SS-RSRP ^{Note 3} | dBm/SCS kHz | 1 | -94 | -94 | -Infinity | -94 |
| I_o | dBm/9.36 MHz | 1 | -64.60 | -62.25 | -64.60 | -62.25 |
| Propagation Condition | | 1 | AWGN | | | |
| <p>Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | |

A.4.6.1.6.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.2 Inter-frequency Measurements

A.4.6.2.1 EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is not used

A.4.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables A.4.6.2.1.1-1, A.4.6.2.1.1-2, and A.4.6.2.1.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.4.6.2.1.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.4.6.2.1.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.4.6.2.1.1-1.

Table A.4.6.2.1.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

| Config | Description |
|--------|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |

Note 1: The UE is only required to be tested in one of the supported test configurations
 Note 2: target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2

Table A.4.6.2.1.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

| Parameter | Unit | Test configuration | Value | | Comment |
|-----------|------|--------------------|--------|--------|---------|
| | | | Test 1 | Test 2 | |

| | | | | | |
|---|----|--------------------|---|---|---|
| E-UTRA RF Channel Number | | Config 1,2,3,4,5,6 | 1 | | One E-UTRAN TDD carrier frequencies is used. |
| NR RF Channel Number | | Config 1,2,3,4,5,6 | 1, 2 | | Two FR1 NR carrier frequencies is used. |
| Active cell | | Config 1,2,3,4,5,6 | LTE Cell 1 (PCell) and NR cell 2 (PScell) | | LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1. |
| Neighbour cell | | Config 1,2,3,4,5,6 | NR cell 3 | | NR cell 3 is on NR RF channel number 2. |
| Gap Pattern Id | | Config 1,2,3,4,5,6 | 0 | 4 | As specified in clause 9.1.2-1. |
| Measurement gap offset | | Config 1,2,3,4,5,6 | 9 | 9 | |
| A3-Offset | dB | Config 1,2,3,4,5,6 | -6 | | |
| Hysteresis | dB | Config 1,2,3,4,5,6 | 0 | | |
| CP length | | Config 1,2,3,4,5,6 | Normal | | |
| TimeToTrigger | s | Config 1,2,3,4,5,6 | 0 | | |
| Filter coefficient | | Config 1,2,3,4,5,6 | 0 | | L3 filtering is not used |
| DRX | | Config 1,2,3,4,5,6 | OFF | | DRX is not used |
| Time offset between PCell and PScell | | Config 1,2,3,4,5,6 | 3 μ s | | Synchronous EN-DC |
| Time offset between serving and neighbour cells | | Config 1,4 | 3 ms | | Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2. |
| | | Config 2,3,5,6 | 3 μ s | | Synchronous cells. |
| T1 | s | Config 1,2,3,4,5,6 | 5 | | |
| T2 | s | Config 1,2,3,4,5,6 | 1 | 1 | |

Table A.4.6.2.1.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

| Parameter | Unit | Test configuration | Cell 2 | | Cell 3 | |
|-----------------------|------|--------------------|-----------------------------|----|-------------|----|
| | | | T1 | T2 | T1 | T2 |
| NR RF Channel Number | | Config 1,2,3,4,5,6 | 1 | | 2 | |
| Duplex mode | | Config 1,4 | FDD | | | |
| | | Config 2,3,5,6 | TDD | | | |
| BW _{channel} | MHz | Config 1,4 | 10: N _{RB,c} = 52 | | | |
| | | Config 2,5 | 10: N _{RB,c} = 52 | | | |
| | | Config 3,6 | 40: N _{RB,c} = 106 | | | |
| BWP BW | MHz | Config 1,4 | 10: N _{RB,c} = 52 | | | |
| | | Config 2,5 | 10: N _{RB,c} = 52 | | | |
| | | Config 3,6 | 40: N _{RB,c} = 106 | | | |
| TDD configuration | | Config 2,5 | TDDConf.1.1 | | TDDConf.1.1 | |
| | | Config 3,6 | TDDConf.2.1 | | TDDConf.2.1 | |

| | | | | | | |
|---|------------|--------------------|-------------|-----------|-----------|-----|
| Initial DL BWP | | Config 1,2,3,4,5,6 | DLBWP.0.1 | NA | | |
| Initial UL BWP | | Config 1,2,3,4,5,6 | ULBWP.0.1 | NA | | |
| Dedicated DL BWP | | Config 1,2,3,4,5,6 | DLBWP.1.1 | NA | | |
| Dedicated UL BWP | | Config 1,2,3,4,5,6 | ULBWP.1.1 | NA | | |
| TRS configuration | | Config 1,4 | TRS.1.1 FDD | NA | | |
| | | Config 2,5 | TRS.1.1 TDD | NA | | |
| | | Config 3,6 | TRS.1.2 TDD | NA | | |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | Config 1,2,3,4,5,6 | OP.1 | OP.1 | | |
| PDSCH Reference measurement channel | | Config 1,4 | SR.1.1 FDD | | | |
| | | Config 2,5 | SR.1.1 TDD | | | |
| | | Config 3,6 | SR2.1 TDD | | | |
| CORESET Reference Channel | | Config 1,4 | CR.1.1 FDD | - | | |
| | | Config 2,5 | CR.1.1 TDD | | | |
| | | Config 3,6 | CR2.1 TDD | | | |
| SSB parameters | | Config 1,4 | SSB.1 FR1 | SSB.5 FR1 | | |
| | | Config 2,5 | SSB.1 FR1 | SSB.5 FR1 | | |
| | | Config 3,6 | SSB.2 FR1 | SSB.6 FR1 | | |
| SMTC configuration defined in A.3.11 | | Config 1,4 | SMTC.2 | SMTC.5 | | |
| | | Config 2,3,5,6 | SMTC.1 | SMTC.4 | | |
| PDSCH/PDCCH subcarrier spacing | kHz | Config 1,2,4,5 | 15 | | | |
| | | Config 3,6 | 30 | | | |
| EPRE ratio of PSS to SSS | | Config 1,2,3,4,5,6 | 0 | 0 | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | |
| N_{oc}^{Note2} | dBm/15 kHz | | -98 | -98 | | |
| N_{oc}^{Note2} | dBm/S CS | Config 1,2,4,5 | -98 | -98 | | |
| | | Config 3,6 | -95 | -95 | | |
| SS-RSRP ^{Note 3} | dBm/S CS | Config 1,2,4,5 | -94 | -94 | -Infinity | -91 |
| | | Config 3,6 | -91 | -91 | -Infinity | -88 |
| \hat{E}_s / I_{oc} | dB | Config 1,2,3,4,5,6 | 4 | 4 | -Infinity | 7 |
| \hat{E}_s / N_{oc} | dB | Config 1,2,3,4,5,6 | 4 | 4 | -Infinity | 7 |

| | | | | | | |
|---------------------------------|--|--------------------|--------|--------|--------|--------|
| I _o ^{Note3} | dBm/9.36MHz | Config 1,2,4,5 | -64.59 | -64.59 | -70.05 | -62.26 |
| | dBm/38.16MHz | Config 3,6 | -58.49 | -58.49 | -63.94 | -56.15 |
| Propagation Condition | | Config 1,2,3,4,5,6 | AWGN | | | |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{sc} to be fulfilled. | | | | | |
| Note 3: | SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | |
| Note 4: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | | | |

A.4.6.2.1.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 760 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.2.2 EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used

A.4.6.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables A.4.6.2.2.1-1, A.4.6.2.2.1-2, and A.4.6.2.2.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.4.6.2.2.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #4 as defined in Table A.4.6.2.2.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.4.6.2.2.1-1.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.4.6.2.2.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

| Config | Description |
|--|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note 1: The UE is only required to be tested in one of the supported test configurations | |
| Note 2: target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2 | |

Table A.4.6.2.2.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

| Parameter | Unit | Test configuration | Value | | | | Comment |
|---|------|--------------------|---|--------|--------|--------|---|
| | | | Test 1 | Test 2 | Test 3 | Test 4 | |
| E-UTRA RF Channel Number | | Config 1,2,3,4,5,6 | 1 | | | | One E-UTRAN TDD carrier frequencies is used. |
| NR RF Channel Number | | Config 1,2,3,4,5,6 | 1, 2 | | | | Two FR1 NR carrier frequencies is used. |
| Active cell | | Config 1,2,3,4,5,6 | LTE Cell 1 (PCell) and NR cell 2 (PSCell) | | | | LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1. |
| Neighbour cell | | Config 1,2,3,4,5,6 | NR cell 3 | | | | NR cell 3 is on NR RF channel number 2. |
| Gap Pattern Id | | Config 1,2,3,4,5,6 | 0 | | 4 | | As specified in clause 9.1.2-1. |
| Measurement gap offset | | Config 1,2,3,4,5,6 | 39 | | 9 | | |
| A3-Offset | dB | Config 1,2,3,4,5,6 | -6 | | | | |
| Hysteresis | dB | Config 1,2,3,4,5,6 | 0 | | | | |
| CP length | | Config 1,2,3,4,5,6 | Normal | | | | |
| TimeToTrigger | s | Config 1,2,3,4,5,6 | 0 | | | | |
| Filter coefficient | | Config 1,2,3,4,5,6 | 0 | | | | L3 filtering is not used |
| DRX | ms | Config 1,2,3,4,5,6 | DRX .1 | DRX .2 | DRX .1 | DRX .2 | As specified in clause A.3.3 |
| Time offset between PCell and PSCell | | Config 1,2,3,4,5,6 | 3 μ s | | | | Synchronous EN-DC |
| Time offset between serving and neighbour cells | | Config 1,4 | 3ms | | | | Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2. |
| | | Config 2,3,5,6 | 3 μ s | | | | Synchronous cells. |

| | | | | | | |
|----|---|-----------------------|-----|----|-----|----|
| T1 | s | Config 1,2,3,4,5,6 | 5 | | | |
| T2 | s | Config 1,2,3,4,5,6 | 1.1 | 11 | 1.1 | 11 |

Table A.4.6.2.2.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

| Parameter | Unit | Test configuration | Cell 2 | | Cell 3 | |
|---|------|-----------------------|-----------------------------|----|-------------|----|
| | | | T1 | T2 | T1 | T2 |
| NR RF Channel Number | | Config 1,2,3,4,5,6 | 1 | | 2 | |
| Duplex mode | | Config 1,4 | FDD | | | |
| | | Config 2,3,5,6 | TDD | | | |
| BW _{channel} | MHz | Config 1,4 | 10: N _{RB,c} = 52 | | | |
| | | Config 2,5 | 10: N _{RB,c} = 52 | | | |
| | | Config 3,6 | 40: N _{RB,c} = 106 | | | |
| BWP BW | MHz | Config 1,4 | 10: N _{RB,c} = 52 | | | |
| | | Config 2,5 | 10: N _{RB,c} = 52 | | | |
| | | Config 3,6 | 40: N _{RB,c} = 106 | | | |
| TDD configuration | | Config 2,5 | TDDConf.1.1 | | TDDConf.1.1 | |
| | | Config 3,6 | TDDConf.2.1 | | TDDConf.2.1 | |
| Initial DL BWP | | Config 1,2,3,4,5,6 | DLBWP.0.1 | | NA | |
| Initial UL BWP | | Config 1,2,3,4,5,6 | ULBWP.0.1 | | NA | |
| Dedicated DL BWP | | Config 1,2,3,4,5,6 | DLBWP.1.1 | | NA | |
| Dedicated UL BWP | | Config 1,2,3,4,5,6 | ULBWP.1.1 | | NA | |
| TRS configuration | | Config 1,4 | TRS.1.1 FDD | | NA | |
| | | Config 2,5 | TRS.1.1 TDD | | NA | |
| | | Config 3,6 | TRS.1.2 TDD | | NA | |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | Config 1,2,3,4,5,6 | OP.1 | | OP.1 | |
| PDSCH Reference measurement channel | | Config 1,4 | SR.1.1 FDD | | | |
| | | Config 2,5 | SR.1.1 TDD | | | |
| | | Config 3,6 | SR2.1 TDD | | | |
| CORESET Reference Channel | | Config 1,4 | CR.1.1 FDD | | - | |
| | | Config 2,5 | CR.1.1 TDD | | | |
| | | Config 3,6 | CR2.1 TDD | | | |
| SSB parameters | | Config 1,4 | SSB.1 FR1 | | SSB.5 FR1 | |
| | | Config 2,5 | SSB.1 FR1 | | SSB.5 FR1 | |
| | | Config 3,6 | SSB.2 FR1 | | SSB.6 FR1 | |
| SMTC configuration defined in A.3.11 | | Config 1,4 | SMTC.2 | | SMTC.5 | |
| | | Config 2,3,5,6 | SMTC.1 | | SMTC.4 | |
| PDSCH/PDCCH subcarrier spacing | kHz | Config 1,2,4,5 | 15 | | | |
| | | Config 3,6 | 30 | | | |
| EPRE ratio of PSS to SSS | | | 0 | | 0 | |

| | | | | | | |
|--|--------------|-----------------------|--------|--------|-----------|--------|
| EPRE ratio of PBCH DMRS to SSS | | Config 1,2,3,4,5,6 | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | |
| N_{oc} ^{Note2} | dBm/15 kHz | | -98 | | -98 | |
| N_{oc} ^{Note2} | dBm/S CS | Config 1,2,4,5 | -98 | | -98 | |
| | | Config 3,6 | -95 | | -95 | |
| SS-RSRP ^{Note 3} | dBm/S CS | Config 1,2,4,5 | -94 | -94 | -Infinity | -91 |
| | | Config 3,6 | -91 | -91 | -Infinity | -88 |
| \hat{E}_s / I_{ca} | dB | Config 1,2,3,4,5,6 | 4 | 4 | -Infinity | 7 |
| \hat{E}_s / N_{oc} | dB | Config 1,2,3,4,5,6 | 4 | 4 | -Infinity | 7 |
| I_o ^{Note3} | dBm/9.36MHz | Config 1,2,4,5 | -64.59 | -64.59 | -70.05 | -62.26 |
| | dBm/38.16MHz | Config 3,6 | -58.49 | -58.49 | -63.94 | -56.15 |
| Propagation Condition | | Config 1,2,3,4,5,6 | AWGN | | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> | | | | | | |

A.4.6.2.2.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered

measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, 2, 3 and 4 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCCH.

A.4.6.2.3 Void

A.4.6.2.4 Void

A.4.6.2.5 EN-DC event triggered reporting tests for FR1 cell with SSB time index detection when DRX is not used

A.4.6.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables A.4.6.2.5.1-1, A.4.6.2.5.1-2, and A.4.6.2.5.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.4.6.2.5.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.4.6.2.5.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.4.6.2.5.1-1.

Table A.4.6.2.5.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

| Config | Description |
|---------|--|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note 1: | The UE is only required to be tested in one of the supported test configurations |
| Note 2: | target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2 |

Table A.4.6.2.5.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

| Parameter | Unit | Test configuration | Value | | Comment |
|---|------|--------------------|---|--------|---|
| | | | Test 1 | Test 2 | |
| E-UTRA RF Channel Number | | Config 1,2,3,4,5,6 | 1 | | One E-UTRAN TDD carrier frequencies is used. |
| NR RF Channel Number | | Config 1,2,3,4,5,6 | 1, 2 | | Two FR1 NR carrier frequencies is used. |
| Active cell | | Config 1,2,3,4,5,6 | LTE Cell 1 (PCell) and NR cell 2 (PScell) | | LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1. |
| Neighbour cell | | Config 1,2,3,4,5,6 | NR cell 3 | | NR cell 3 is on NR RF channel number 2. |
| Gap Pattern Id | | Config 1,2,3,4,5,6 | 0 | 4 | As specified in clause 9.1.2-1. |
| Measurement gap offset | | Config 1,2,3,4,5,6 | 9 | 9 | |
| A3-Offset | dB | Config 1,2,3,4,5,6 | -6 | | |
| Hysteresis | dB | Config 1,2,3,4,5,6 | 0 | | |
| CP length | | Config 1,2,3,4,5,6 | Normal | | |
| TimeToTrigger | s | Config 1,2,3,4,5,6 | 0 | | |
| Filter coefficient | | Config 1,2,3,4,5,6 | 0 | | L3 filtering is not used |
| DRX | | Config 1,2,3,4,5,6 | OFF | | DRX is not used |
| Time offset between PCell and PSCell | | Config 1,2,3,4,5,6 | 3 μ s | | Synchronous EN-DC |
| Time offset between serving and neighbour cells | | Config 1,4 | 3ms | | Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2. |
| | | Config 2,3,5,6 | 3 μ s | | Synchronous cells. |
| T1 | s | Config 1,2,3,4,5,6 | 5 | | |
| T2 | s | Config 1,2,3,4,5,6 | 1.1 | 1 | |

Table A.4.6.2.5.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

| Parameter | Unit | Test configuration | Cell 2 | | Cell 3 | |
|-----------------------|------|--------------------|----------------------------|----|--------|----|
| | | | T1 | T2 | T1 | T2 |
| NR RF Channel Number | | Config 1,2,3,4,5,6 | 1 | | 2 | |
| Duplex mode | | Config 1,4 | FDD | | | |
| | | Config 2,3,5,6 | TDD | | | |
| BW _{channel} | MHz | Config 1,4 | 10: N _{RB,c} = 52 | | | |
| | | Config 2,5 | 10: N _{RB,c} = 52 | | | |

| | | | | |
|---|------------|--------------------|----------------------|-------------|
| BWP BW | MHz | Config 3,6 | 40: $N_{RB,c} = 106$ | |
| | | Config 1,4 | 10: $N_{RB,c} = 52$ | |
| | | Config 2,5 | 10: $N_{RB,c} = 52$ | |
| | | Config 3,6 | 40: $N_{RB,c} = 106$ | |
| TDD configuration | | Config 2,5 | TDDConf.1.1 | TDDConf.1.1 |
| | | Config 3,6 | TDDConf.2.1 | TDDConf.2.1 |
| Initial DL BWP | | Config 1,2,3,4,5,6 | DLBWP.0.1 | NA |
| Initial UL BWP | | Config 1,2,3,4,5,6 | ULBWP.0.1 | NA |
| Dedicated DL BWP | | Config 1,2,3,4,5,6 | DLBWP.1.1 | NA |
| Dedicated UL BWP | | Config 1,2,3,4,5,6 | ULBWP.1.1 | NA |
| TRS configuration | | Config 1,4 | TRS.1.1 FDD | NA |
| | | Config 2,5 | TRS.1.1 TDD | NA |
| | | Config 3,6 | TRS.1.2 TDD | NA |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | Config 1,2,3,4,5,6 | OP.1 | OP.1 |
| PDSCH Reference measurement channel | | Config 1,4 | SR.1.1 FDD | |
| | | Config 2,5 | SR.1.1 TDD | |
| | | Config 3,6 | SR2.1 TDD | |
| CORESET Reference Channel | | Config 1,4 | CR.1.1 FDD | - |
| | | Config 2,5 | CR.1.1 TDD | |
| | | Config 3,6 | CR2.1 TDD | |
| SSB parameters | | Config 1,4 | SSB.1 FR1 | SSB.5 FR1 |
| | | Config 2,5 | SSB.1 FR1 | SSB.5 FR1 |
| | | Config 3,6 | SSB.2 FR1 | SSB.6 FR1 |
| SMTC configuration defined in A.3.11 | | Config 1,4 | SMTC.2 | SMTC.5 |
| | | Config 2,3,5,6 | SMTC.1 | SMTC.4 |
| PDSCH/PDCCH subcarrier spacing | kHz | Config 1,2,4,5 | 15 | |
| | | Config 3,6 | 30 | |
| EPRE ratio of PSS to SSS | | Config 1,2,3,4,5,6 | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | |
| N_{oc} ^{Note2} | dBm/15 kHz | | -98 | -98 |

| | | | | | | |
|--|------------------|-----------------------|--------|--------|-----------|--------|
| N_{oc} ^{Note2} | dBm/S CS | Config 1,2,4,5 | -98 | | -98 | |
| | | Config 3,6 | -95 | | -95 | |
| SS-RSRP ^{Note 3} | dBm/S CS | Config 1,2,4,5 | -94 | -94 | -Infinity | -91 |
| | | Config 3,6 | -91 | -91 | -Infinity | -88 |
| \hat{E}_s / I_{ca} | dB | Config 1,2,3,4,5,6 | 4 | 4 | -Infinity | 7 |
| \hat{E}_s / N_{oc} | dB | Config 1,2,3,4,5,6 | 4 | 4 | -Infinity | 7 |
| I_0 ^{Note3} | dBm/9. 36MHz | Config 1,2,4,5 | -64.59 | -64.59 | -70.05 | -62.26 |
| | dBm/38 .16MHz | Config 3,6 | -58.49 | -58.49 | -63.94 | -56.15 |
| Propagation Condition | | Config 1,2,3,4,5,6 | AWGN | | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> | | | | | | |

A.4.6.2.5.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1040 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 880 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.2.6 EN-DC event triggered reporting tests for FR1 cell with SSB time index detection when DRX is used

A.4.6.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables A.4.6.2.6.1-1, A.4.6.2.6.1-2, and A.4.6.2.6.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.4.6.2.6.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #4 as defined in Table A.4.6.2.6.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.4.6.2.6.1-1.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.4.6.2.6.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

| Config | Description |
|--------|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |

Note 1: The UE is only required to be tested in one of the supported test configurations
Note 2: target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2

Table A.4.6.2.6.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

| Parameter | Unit | Test configuration | Value | | | | Comment |
|--------------------------|------|--------------------|---|--------|--------|--------|---|
| | | | Test 1 | Test 2 | Test 3 | Test 4 | |
| E-UTRA RF Channel Number | | Config 1,2,3,4,5,6 | 1 | | | | One E-UTRAN TDD carrier frequencies is used. |
| NR RF Channel Number | | Config 1,2,3,4,5,6 | 1, 2 | | | | Two FR1 NR carrier frequencies is used. |
| Active cell | | Config 1,2,3,4,5,6 | LTE Cell 1 (PCell) and NR cell 2 (PScell) | | | | LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1. |
| Neighbour cell | | Config 1,2,3,4,5,6 | NR cell 3 | | | | NR cell 3 is on NR RF channel number 2. |
| Gap Pattern Id | | Config 1,2,3,4,5,6 | 0 | | 4 | | As specified in clause 9.1.2-1. |
| Measurement gap offset | | Config 1,2,3,4,5,6 | 9 | | 9 | | |
| A3-Offset | dB | Config 1,2,3,4,5,6 | -6 | | | | |
| Hysteresis | dB | Config 1,2,3,4,5,6 | 0 | | | | |
| CP length | | Config 1,2,3,4,5,6 | Normal | | | | |
| TimeToTrigger | s | Config 1,2,3,4,5,6 | 0 | | | | |

| | | | | | | | |
|---|----|--------------------|-----------|--------|--------|--------|---|
| Filter coefficient | | Config 1,2,3,4,5,6 | 0 | | | | L3 filtering is not used |
| DRX | ms | Config 1,2,3,4,5,6 | DRX .1 | DRX .2 | DRX .1 | DRX .2 | As specified in clause A.3.3 |
| Time offset between PCell and PSCell | | Config 1,2,3,4,5,6 | 3 μ s | | | | Synchronous EN-DC |
| Time offset between serving and neighbour cells | | Config 1,4 | 3ms | | | | Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2. |
| | | Config 2,3,5,6 | 3 μ s | | | | Synchronous cells. |
| T1 | s | Config 1,2,3,4,5,6 | 5 | | | | |
| T2 | s | Config 1,2,3,4,5,6 | 1.3 | 13.5 | 1.3 | 13.5 | |

Table A.4.6.2.6.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

| Parameter | Unit | Test configuration | Cell 2 | | Cell 3 | |
|---|------|--------------------|-----------------------------|----|--------|----|
| | | | T1 | T2 | T1 | T2 |
| NR RF Channel Number | | Config 1,2,3,4,5,6 | 1 | | 2 | |
| Duplex mode | | Config 1,4 | FDD | | | |
| | | Config 2,3,5,6 | TDD | | | |
| BW _{channel} | MHz | Config 1,4 | 10: N _{RB,c} = 52 | | | |
| | | Config 2,5 | 10: N _{RB,c} = 52 | | | |
| | | Config 3,6 | 40: N _{RB,c} = 106 | | | |
| BWP BW | MHz | Config 1,4 | 10: N _{RB,c} = 52 | | | |
| | | Config 2,5 | 10: N _{RB,c} = 52 | | | |
| | | Config 3,6 | 40: N _{RB,c} = 106 | | | |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | Config 1,2,3,4,5,6 | OP.1 | | OP.1 | |
| PDSCH Reference measurement channel | | Config 1,4 | SR.1.1 FDD | | - | |
| | | Config 2,5 | SR.1.1 TDD | | | |
| | | Config 3,6 | SR.2.1 TDD | | | |
| CORESET Reference Channel | | Config 1,4 | CR.1.1 FDD | | - | |
| | | Config 2,5 | CR.1.1 TDD | | | |
| | | Config 3,6 | CR.2.1 TDD | | | |
| TDD configuration | | Config 2,5 | TDDConf.1.1 | | | |
| | | Config 3,6 | TDDConf.2.1 | | | |
| Initial DL BWP | | Config 1,2,3,4,5,6 | DLBWP.0.1 | | | |
| TRS configuration | | Config 1,4 | TRS.1.1 FDD | | | |
| | | Config 2,5 | TRS.1.1 TDD | | | |
| | | Config 3,6 | TRS.1.2 TDD | | | |
| Initial UL BWP | | Config 1,2,3,4,5,6 | ULBWP.0.1 | | | |
| Dedicated DL BWP | | Config 1,2,3,4,5,6 | DLBWP.1.1 | | | |
| Dedicated UL BWP | | Config 1,2,3,4,5,6 | ULBWP.1.1 | | | |

| | | | | | | |
|--|--------------|--------------------|-----------|--------|-----------|--------|
| SSB parameters | | Config 1,4 | SSB.1 FR1 | | SSB.5 FR1 | |
| | | Config 2,5 | SSB.1 FR1 | | SSB.5 FR1 | |
| | | Config 3,6 | SSB.2 FR1 | | SSB.6 FR1 | |
| SMTC configuration defined in A.3.11 | | Config 1,4 | SMTC.2 | | SMTC.5 | |
| | | Config 2,3,5,6 | SMTC.1 | | SMTC.4 | |
| PDSCH/PDCCH subcarrier spacing | kHz | Config 1,2,4,5 | 15 | | | |
| | | Config 3,6 | 30 | | | |
| EPRE ratio of PSS to SSS | | Config 1,2,3,4,5,6 | 0 | | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | |
| N_{oc} ^{Note2} | dBm/15 kHz | | -98 | | -98 | |
| N_{oc} ^{Note2} | dBm/S CS | Config 1,2,4,5 | -98 | | -98 | |
| | | Config 3,6 | -95 | | -95 | |
| SS-RSRP ^{Note 3} | dBm/S CS | Config 1,2,4,5 | -94 | -94 | -Infinity | -91 |
| | | Config 3,6 | -91 | -91 | -Infinity | -88 |
| \hat{E}_s/I_{ot} | dB | Config 1,2,3,4,5,6 | 4 | 4 | -Infinity | 7 |
| \hat{E}_s/N_{oc} | dB | Config 1,2,3,4,5,6 | 4 | 4 | -Infinity | 7 |
| I_o ^{Note3} | dBm/9.36MHz | Config 1,2,4,5 | -64.59 | -64.59 | -70.05 | -62.26 |
| | dBm/38.16MHz | Config 3,6 | -58.49 | -58.49 | -63.94 | -56.15 |
| Propagation Condition | | Config 1,2,3,4,5,6 | AWGN | | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> | | | | | | |

A.4.6.2.6.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 13440 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 13440 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, 2, 3 and 4 UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCCH.

A.4.6.2.7 Void

A.4.6.2.8 Void

A.4.6.3 Void

A.4.6.4 L1-RSRP measurement for beam reporting

A.4.6.4.1 SSB based L1-RSRP measurement when DRX is not used

A.4.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.4.6.4.1.1-1.

Table A.4.6.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

| Config | Description |
|--------|--|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

A.4.6.4.1.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.6.4.1.2-1 and Table A.4.6.4.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.4.6.4.1.2-1: General test parameters

| Parameter | Config | Unit | Value |
|-------------------------------------|--------|------|-----------------------------|
| SSB GSCN | 1~6 | | freq1 |
| Duplex mode | 1,4 | | FDD |
| | 2,5 | | TDD |
| | 3,6 | | TDD |
| TDD Configuration | 1,4 | | N/A |
| | 2,5 | | TDDConf.1.1 |
| | 3,6 | | TDDConf.2.1 |
| BW _{channel} | 1,4 | MHz | 10: N _{RB,c} = 52 |
| | 2,5 | | 10: N _{RB,c} = 52 |
| | 3,6 | | 40: N _{RB,c} = 106 |
| PDSCH Reference measurement channel | 1,4 | | SR.1.1 FDD |
| | 2,5 | | SR.1.1 TDD |
| | 3,6 | | SR.2.1 TDD |
| RMSI CORESET Reference Channel | 1,4 | | CR.1.1 FDD |
| | 2,5 | | CR.1.1 TDD |
| | 3,6 | | CR.2.1 TDD |
| Dedicated CORESET Reference Channel | 1,4 | | CCR.1.1 FDD |
| | 2,5 | | CCR.1.1 TDD |
| | 3,6 | | CCR.2.1 TDD |
| SSB configuration | 1,4 | | SSB.3 FR1 |
| | 2,5 | | SSB.3 FR1 |
| | 3,6 | | SSB.4 FR1 |
| OCNG Patterns | 1~6 | | OP.1 |
| Initial BWP Configuration | 1~6 | | DLBWP.0.1 ULBWP.0.1 |
| Dedicated BWP configuration | 1~6 | | DLBWP.1.1 ULBWP.1.1 |
| SMTC configuration | 1~6 | | SMTC.1 |
| TRS Configuration | 1,4 | | TRS.1.1 FDD |
| | 2,5 | | TRS.1.1 TDD |
| | 3,6 | | TRS.1.2 TDD |

| | | | |
|---|-----|------|----------------|
| DRX configuration | 1~6 | | Off |
| reportConfigType | 1~6 | | periodic |
| reportQuantity | 1~6 | | ssb-Index-RSRP |
| Number of reported RS | 1~6 | | 2 |
| L1-RSRP reporting period | 1~6 | slot | 80 |
| T1 | 1~6 | s | 5 |
| T2 | 1~6 | s | 1 |
| EPRE ratio of PSS to SSS | 1~6 | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | |
| Propagation condition | 1~6 | | AWGN |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |

Table A.4.6.4.1.2-2: SSB specific test parameters

| Parameter | Config | Unit | SSB#0 | | SSB#1 | |
|--|---------|---------------|--------|--------|-----------|--------|
| | | | T1 | T2 | T1 | T2 |
| N_{oc} ^{Note2} | 1~6 | dBm/15kHz | -94.65 | | | |
| N_{oc} ^{Note2} | 1,2,4,5 | dBm/SSB SCS | -94.65 | | | |
| | 3,6 | | -91.65 | | | |
| \hat{E}_s/I_{ot} | 1~6 | dB | 0 | 0 | -Infinity | 3 |
| SSB RSRP ^{Note3} | 1,2,4,5 | dBm/SSB SCS | -94.65 | -94.65 | -Infinity | -91.65 |
| | 3,6 | | -91.65 | -91.65 | -Infinity | -88.65 |
| I_o ^{Note3} | 1,2,4,5 | dBm/9.36 MHz | -63.69 | -63.69 | -66.70 | -61.93 |
| | 3,6 | dBm/38.16 MHz | -57.59 | -57.59 | -60.61 | -55.84 |
| \hat{E}_s/N_{oc} | 1~6 | dB | 0 | 0 | -Infinity | 3 |
| Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. | | | | | | |
| Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | | |
| Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | | |

A.4.6.4.1.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.4.2 SSB based L1-RSRP measurement when DRX is used

A.4.6.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.4.6.4.2.1-1.

Table A.4.6.4.2.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

| Config | Description |
|--------|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |

Note: The UE is only required to be tested in one of the supported test configurations

A.4.6.4.2.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.6.4.2.2-1 and Table A.4.6.4.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.4.6.4.2.2-1: General test parameters

| Parameter | Config | Unit | Value |
|-----------------------|--------|------|----------------------------|
| SSB GSCN | 1~6 | | freq1 |
| Duplex mode | 1,4 | | FDD |
| | 2,5 | | TDD |
| | 3,6 | | TDD |
| TDD Configuration | 1,4 | | N/A |
| | 2,5 | | TDDConf.1.1 |
| | 3,6 | | TDDConf.2.1 |
| BW _{channel} | 1,4 | MHz | 10: N _{RB,c} = 52 |
| | 2,5 | | 10: N _{RB,c} = 52 |

| | | | |
|---|-----|------|------------------------|
| | 3,6 | | 40: $N_{RB,c} = 106$ |
| PDSCH Reference measurement channel | 1,4 | | SR.1.1 FDD |
| | 2,5 | | SR.1.1 TDD |
| | 3,6 | | SR.2.1 TDD |
| RMSI CORESET Reference Channel | 1,4 | | CR.1.1 FDD |
| | 2,5 | | CR.1.1 TDD |
| | 3,6 | | CR.2.1 TDD |
| Dedicated CORESET Reference Channel | 1,4 | | CCR.1.1 FDD |
| | 2,5 | | CCR.1.1 TDD |
| | 3,6 | | CCR.2.1 TDD |
| SSB configuration | 1,4 | | SSB.3 FR1 |
| | 2,5 | | SSB.3 FR1 |
| | 3,6 | | SSB.4 FR1 |
| OCNG Patterns | 1~6 | | OP.1 |
| Initial BWP Configuration | 1~6 | | DLBWP.0.1 ULBWP.0.1 |
| Dedicated BWP configuration | 1~6 | | DLBWP.1.1 ULBWP.1.1 |
| SMTC configuration | 1~6 | | SMTC.1 |
| TRS Configuration | 1,4 | | TRS.1.1 FDD |
| | 2,5 | | TRS.1.1 TDD |
| | 3,6 | | TRS.1.2 TDD |
| DRX configuration | 1~6 | | DRX.3 |
| reportConfigType | 1~6 | | periodic |
| reportQuantity | 1~6 | | ssb-Index-RSRP |
| Number of reported RS | 1~6 | | 2 |
| L1-RSRP reporting period | 1~6 | slot | 80 |
| T1 | 1~6 | s | 5 |
| T2 | 1~6 | s | 1 |
| EPRE ratio of PSS to SSS | 1~6 | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | |
| Propagation condition | 1~6 | | AWGN |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |

Table A.4.6.4.2.2-2: SSB specific test parameters

| Parameter | Config | Unit | SSB#0 | | SSB#1 | |
|--|---------|---------------|--------|--------|-----------|--------|
| | | | T1 | T2 | T1 | T2 |
| N_{oc} ^{Note2} | 1~6 | dBm/15kHz | -94.65 | | | |
| N_{oc} ^{Note2} | 1,2,4,5 | dBm/SSB SCS | -94.65 | | | |
| | 3,6 | | -91.65 | | | |
| \hat{E}_s/I_{ot} | 1~6 | dB | 0 | 0 | -Infinity | 3 |
| SSB RSRP ^{Note3} | 1,2,4,5 | dBm/SSB SCS | -94.65 | -94.65 | -Infinity | -91.65 |
| | 3,6 | | -91.65 | -91.65 | -Infinity | -88.65 |
| I_o ^{Note3} | 1,2,4,5 | dBm/9.36 MHz | -63.69 | -63.69 | -66.70 | -61.93 |
| | 3,6 | dBm/38.16 MHz | -57.59 | -57.59 | -60.61 | -55.84 |
| \hat{E}_s/N_{oc} | 1~6 | dB | 0 | 0 | -Infinity | 3 |
| <p>Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | |

A.4.6.4.2.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.4.3 CSI-RS based L1-RSRP measurement when DRX is not used

A.4.6.4.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells in Table A.4.6.4.3.1-1.

Table A.4.6.4.3.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

| Config | Description |
|--------|--|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

A.4.6.4.3.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.6.4.3.2-1 and Table A.4.6.4.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (1 Config 1,2,4,5 and 8 for Config 3,6) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.4.6.4.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.4.6.4.3.2-1: General test parameters

| Parameter | Config | Unit | Value |
|-------------------------------------|--------|------|-----------------------------|
| SSB GSCN | 1~6 | | freq1 |
| Duplex mode | 1,4 | | FDD |
| | 2,5 | | TDD |
| | 3,6 | | TDD |
| TDD Configuration | 1,4 | | N/A |
| | 2,5 | | TDDConf.1.1 |
| | 3,6 | | TDDConf.2.1 |
| BW _{channel} | 1,4 | MHz | 10: N _{RB,c} = 52 |
| | 2,5 | | 10: N _{RB,c} = 52 |
| | 3,6 | | 40: N _{RB,c} = 106 |
| PDSCH Reference measurement channel | 1,4 | | SR.1.1 FDD |
| | 2,5 | | SR.1.1 TDD |
| | 3,6 | | SR.2.1 TDD |
| RMSI CORESET Reference Channel | 1,4 | | CR.1.1 FDD |
| | 2,5 | | CR.1.1 TDD |
| | 3,6 | | CR.2.1 TDD |
| Dedicated CORESET Reference Channel | 1,4 | | CCR.1.1 FDD |
| | 2,5 | | CCR.1.1 TDD |
| | 3,6 | | CCR.2.1 TDD |
| SSB configuration | 1,4 | | SSB.3 FR1 |
| | 2,5 | | SSB.3 FR1 |
| | 3,6 | | SSB.4 FR1 |
| CSI-RS configuration | 1,4 | | CSI-RS 1.3 FDD |
| | 2,5 | | CSI-RS 1.3 TDD |
| | 3,6 | | CSI-RS 2.3 TDD |

| | | | |
|---|-----|-------|------------------------|
| OCNG Patterns | 1~6 | | OP.1 |
| TRS Configuration | 1,4 | | TRS.1.1 FDD |
| | 2,5 | | TRS.1.1 TDD |
| | 3,6 | | TRS.1.2 TDD |
| Initial BWP Configuration | 1~6 | | DLBWP.0.1 ULBWP.0.1 |
| Dedicated BWP configuration | 1~6 | | DLBWP.1.1 ULBWP.1.1 |
| SMTC configuration | 1~6 | | SMTC.1 |
| DRX configuration | 1~6 | | Off |
| reportConfigType | 1~6 | | aperiodic |
| reportQuantity | 1~6 | | cri-RSRP |
| Number of reported RS | 1~6 | | 2 |
| qcl-Info | 1~6 | | SSB#0 for resource#0 |
| | | | SSB#1 for resource#1 |
| reportSlotOffsetList | 1~6 | slots | 26 |
| T1 | 1~6 | s | 5 |
| EPRE ratio of PSS to SSS | 1~6 | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | |
| Propagation condition | 1~6 | | AWGN |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |

Table A.4.6.4.3.2-2: CSI-RS specific test parameters

| Parameter | Config | Unit | CSI-RS#0 | CSI-RS#1 |
|---------------------------------|---------|---------------|----------|----------|
| N_{oc} ^{Note1} | 1~6 | dBm/15kHz | -94.65 | |
| N_{oc} ^{Note1} | 1,2,4,5 | dBm/SSB SCS | -94.65 | |
| | 3,6 | | -91.65 | |
| \hat{E}_s/I_{ot} | 1~6 | dB | 0 | 3 |
| CSI-RS RSRP ^{Note2} | 1,2,4,5 | dBm/SSB SCS | -94.65 | -91.65 |
| | 3,6 | | -91.65 | -88.65 |
| I_o ^{Note2} | 1,2,4,5 | dBm/9.36 MHz | -63.69 | -61.93 |
| | 3,6 | dBm/38.16 MHz | -57.59 | -55.84 |

| | | | | |
|----------------------|--|----|---|---|
| \hat{E}_s / N_{oc} | 1~6 | dB | 0 | 3 |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | |
| Note 3: | CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | |

A.4.6.4.3.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 26 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause 10.1.20.1.1 and relative accuracy requirement in clause 10.1.20.1.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.4.4 CSI-RS based L1-RSRP measurement when DRX is used

A.4.6.4.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells in Table A.4.6.4.4.1-1.

Table A.4.6.4.4.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

| Config | Description |
|--------|--|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

A.4.6.4.4.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.6.4.4.2-1 and Table A.4.6.4.4.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (1 Config 1,2,4,5 and 8 for Config 3,6) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.4.6.4.4.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.4.6.4.4.2-1: General test parameters

| Parameter | Config | Unit | Value |
|---|--------|-------|-----------------------------|
| SSB GSCN | 1~6 | | freq1 |
| Duplex mode | 1,4 | | FDD |
| | 2,5 | | TDD |
| | 3,6 | | TDD |
| TDD Configuration | 1,4 | | N/A |
| | 2,5 | | TDDConf.1.1 |
| | 3,6 | | TDDConf.2.1 |
| BW _{channel} | 1,4 | MHz | 10: N _{RB,c} = 52 |
| | 2,5 | | 10: N _{RB,c} = 52 |
| | 3,6 | | 40: N _{RB,c} = 106 |
| PDSCH Reference measurement channel | 1,4 | | SR.1.1 FDD |
| | 2,5 | | SR.1.1 TDD |
| | 3,6 | | SR.2.1 TDD |
| RMSI CORESET Reference Channel | 1,4 | | CR.1.1 FDD |
| | 2,5 | | CR.1.1 TDD |
| | 3,6 | | CR.2.1 TDD |
| Dedicated CORESET Reference Channel | 1,4 | | CCR.1.1 FDD |
| | 2,5 | | CCR.1.1 TDD |
| | 3,6 | | CCR.2.1 TDD |
| SSB configuration | 1,4 | | SSB.3 FR1 |
| | 2,5 | | SSB.3 FR1 |
| | 3,6 | | SSB.4 FR1 |
| CSI-RS configuration | 1,4 | | CSI-RS 1.3 FDD |
| | 2,5 | | CSI-RS 1.3 TDD |
| | 3,6 | | CSI-RS 2.3 TDD |
| OCNG Patterns | 1~6 | | OP.1 |
| TRS Configuration | 1,4 | | TRS.1.1 FDD |
| | 2,5 | | TRS.1.1 TDD |
| | 3,6 | | TRS.1.2 TDD |
| Initial BWP Configuration | 1~6 | | DLBWP.0.1 ULBWP.0.1 |
| Dedicated BWP configuration | 1~6 | | DLBWP.1.1 ULBWP.1.1 |
| SMTC configuration | 1~6 | | SMTC.1 |
| DRX configuration | 1~6 | | DRX.3 |
| reportConfigType | 1~6 | | aperiodic |
| reportQuantity | 1~6 | | cri-RSRP |
| Number of reported RS | 1~6 | | 2 |
| qcl-Info | 1~6 | | SSB#0 for resource#0 |
| | | | SSB#1 for resource#1 |
| reportSlotOffsetList | 1~6 | slots | 26 |
| T1 | 1~6 | s | 5 |
| EPRE ratio of PSS to SSS | 1~6 | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | |
| Propagation condition | 1~6 | | AWGN |

| |
|---|
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
|---|

Table A.4.6.4.4.2-2: CSI-RS specific test parameters

| Parameter | Config | Unit | CSI-RS#0 | CSI-RS#1 |
|--|---------|---------------|----------|----------|
| N_{oc} ^{Note1} | 1~6 | dBm/15kHz | -94.65 | |
| N_{oc} ^{Note1} | 1,2,4,5 | dBm/SSB SCS | -94.65 | |
| | 3,6 | | -91.65 | |
| \hat{E}_s/I_{ot} | 1~6 | dB | 0 | 3 |
| CSI-RS RSRP ^{Note2} | 1,2,4,5 | dBm/SSB SCS | -94.65 | -91.65 |
| | 3,6 | | -91.65 | -88.65 |
| I_o ^{Note2} | 1,2,4,5 | dBm/9.36 MHz | -63.69 | -61.93 |
| | 3,6 | dBm/38.16 MHz | -57.59 | -55.84 |
| \hat{E}_s/N_{oc} | 1~6 | dB | 0 | 3 |
| <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | |

A.4.6.4.4.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 26 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting absolute accuracy requirement in clause 10.1.20.1.1 and relative accuracy requirement in clause 10.1.20.1.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.7 Measurement Performance requirements

A.4.7.1 SS-RSRP

A.4.7.1.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.2.1.1 and 10.1.2.1.2 for intra-frequency measurements.

A.4.7.1.1.2 Test parameters

In this set of test cases all NR cells are on the same carrier frequency. Supported test configurations are shown in table A.4.7.1.1.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in A.4.7.1.1.2-2. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1 In all test cases, Cell 2 is the PSCell, and Cell 3 is the target cell.

Table A.4.7.1.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

| Config | Description |
|--------|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |

Note: The UE is only required to be tested in one of the supported test configurations for each supported band

Table A.4.7.1.1.2-2: SS-RSRP Intra frequency test parameters

| Parameter | | Unit | Test 1 | | Test 2 | | Test 3 | |
|--------------------------------------|----------------|------|-----------------------------|-----------|-------------|-----------|-------------|-----------|
| | | | Cell 2 | Cell 3 | Cell 2 | Cell 3 | Cell 2 | Cell 3 |
| Physical cell ID | | | 489 | 0 | 489 | 0 | 489 | 0 |
| SSB ARFCN | | | freq1 | | freq1 | | freq1 | |
| Duplex mode | Config 1,4 | | FDD | | | | | |
| | Config 2,3,5,6 | | TDD | | | | | |
| TDD configuration | Config 1,4 | | Not Applicable | | | | | |
| | Config 2,5 | | TDDConf.1.1 | | | | | |
| | Config 3,6 | | TDDConf.2.1 | | | | | |
| BW _{channel} | Config 1,4 | MHz | 10: N _{RB,c} = 52 | | | | | |
| | Config 2,5 | | 10: N _{RB,c} = 52 | | | | | |
| | Config 3,6 | | 40: N _{RB,c} = 106 | | | | | |
| Downlink initial BWP configuration | | | DLBWP.0.1 | | | | | |
| Downlink dedicated BWP configuration | | | DLBWP.1.1 | | | | | |
| Uplink initial BWP configuration | | | ULBWP.0.1 | | | | | |
| Uplink dedicated BWP configuration | | | ULBWP.1.1 | | | | | |
| TRS configuration | Config 1,4 | | TRS.1.1 FDD | NA | TRS.1.1 FDD | NA | TRS.1.1 FDD | NA |
| | Config 2,5 | | TRS.1.1 TDD | NA | TRS.1.1 TDD | NA | TRS.1.1 TDD | NA |
| | Config 3,6 | | TRS.1.2 TDD | NA | TRS.1.2 TDD | NA | TRS.1.2 TDD | NA |
| DRX Cycle | | ms | Not Applicable | | | | | |
| PDSCH Reference measurement channel | Config 1,4 | | SR.1.1 FDD | - | SR.1.1 FDD | - | SR.1.1 FDD | - |
| | Config 2,5 | | SR.1.1 TDD | - | SR.1.1 TDD | - | SR.1.1 TDD | - |
| | Config 3,6 | | SR2.1 TDD | - | SR2.1 TDD | - | SR2.1 TDD | - |
| RMSI CORESET Reference Channel | Config 1,4 | | CR.1.1 FDD | - | CR.1.1 FDD | - | CR.1.1 FDD | - |
| | Config 2,5 | | CR.1.1 TDD | - | CR.1.1 TDD | - | CR.1.1 TDD | - |
| | Config 3,6 | | CR2.1 TDD | - | CR2.1 TDD | - | CR2.1 TDD | - |
| Control Channel RMC | Config 1,4 | | CCR.1.1 FDD | - | CCR.1.1 FDD | - | CCR.1.1 FDD | - |
| | Config 2,5 | | CCR.1.1 TDD | - | CCR.1.1 TDD | - | CCR.1.1 TDD | - |
| | Config 3,6 | | CCR2.1 TDD | - | CCR2.1 TDD | - | CCR2.1 TDD | - |
| SSB configuration | Config 1,4 | | SSB.1 FR1 | SSB.1 FR1 | SSB.1 FR1 | SSB.1 FR1 | SSB.1 FR1 | SSB.1 FR1 |

| | | | | | | | | | | | |
|--|--------------------|--|----------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|----------------------------------|------|
| | | Config 2,5 | | SSB.1 FR1 | SSB.1 FR1 | SSB.1 FR1 | SSB.1 FR1 | SSB.1 FR1 | SSB.1 FR1 | | |
| | | Config 3,6 | | SSB.2 FR1 | SSB.2 FR1 | SSB.2 FR1 | SSB.2 FR1 | SSB.2 FR1 | SSB.2 FR1 | | |
| Time offset with Cell 2 | | Config 1,4 | ms | - | 3 | - | 3 | - | 3 | | |
| | | Config 2,3,5,6 | µs | - | 3 | - | 3 | - | 3 | | |
| SMTC configuration | | Config 1,4 | | SMTC.2 | | | | | | | |
| | | Config 2,3,5,6 | | SMTC.1 | | | | | | | |
| OCNG Patterns | | | | OP.1 | | | | | | | |
| PDSCH/PDCCH subcarrier spacing | | Config 1,2,4,5 | kHz | 15 kHz | | | | | | | |
| | | Config 3,6 | | 30kHz | | | | | | | |
| EPRE ratio of PSS to SSS | | | dB | 0 | 0 | 0 | 0 | 0 | 0 | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | | | | | | |
| N_{oc} ^{Note2} | Config 1,2,4,5 | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 6</small> | | | | | | | | dBm/15kHz | -106 |
| | | NR_FDD_FR1_B | -113.5 | | | | | | | | |
| | | NR_TDD_FR1_C | -113 | | | | | | | | |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | -112.5 | | | | | | | | |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | -112 | | | | | | | | |
| | | NR_FDD_FR1_G | -111 | | | | | | | | |
| | | NR_FDD_FR1_H | -110.5 | | | | | | | | |
| | Config 3,6 | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 6</small> | Not applicable ^{Note 5} | -94 | | -114 | | | | | |
| | | NR_FDD_FR1_B | | | | -113.5 | | | | | |
| | | NR_TDD_FR1_C | | | | -113 | | | | | |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -112.5 | | | | | |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -112 | | | | | |
| | | NR_FDD_FR1_G | | | | -111 | | | | | |
| | | NR_FDD_FR1_H | | | | -110.5 | | | | | |
| N_{oc} ^{Note2} | Config 1,2,4,5 | | | dBm/SCS | -106 | | -88 | | | Same as Noc/15kHz | |
| | Config 3,6 | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 6</small> | | | | | | | | Not applicable ^{Note 5} | -91 |
| | | NR_FDD_FR1_B | | | -110.5 | | | | | | |
| | | NR_TDD_FR1_C | | | -110 | | | | | | |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | -109.5 | | | | | | |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | -109 | | | | | | |
| | | NR_FDD_FR1_G | | | -108 | | | | | | |
| | | NR_FDD_FR1_H | -107.5 | | | | | | | | |
| | | \hat{E}_s/I_{ot} | | | dB | 2.46 | -5.97 | 2.46 | -5.97 | | |
| | \hat{E}_s/N_{oc} | | | | dB | 6 | 1 | 6 | 1 | 3 | 0 |
| SS- RSRP ^{Note3} | Config 1,2,4,5 | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 6</small> | dBm/SCS | -100 | -105 | -82 | -87 | -111.00 | -114.00 | | |
| | | NR_FDD_FR1_B | | | | | | -110.50 | -113.50 | | |
| | | NR_TDD_FR1_C | | | | | | -110.00 | -113.00 | | |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | | -109.50 | -112.50 | | |

| | | | | | | | | | | |
|--|----------------|--|--|------------------|------------------------------------|----------------------------------|--------|---------|---------|---------|
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | -109.00 | -112.00 | |
| | | NR_FDD_FR1_G | | | | | | -108.00 | -111.00 | |
| | | NR_FDD_FR1_H | | | | | | -107.50 | -110.50 | |
| | Config 3,6 | | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 6</small> | | - Not applicable ^{Note 5} | Not applicable ^{Note 5} | -85 | -90 | -108.00 | -111.00 |
| | | | NR_FDD_FR1_B | | | | | | -107.50 | -110.50 |
| | | | NR_TDD_FR1_C | | | | | | -107.00 | -110.00 |
| | | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | | -106.50 | -109.50 |
| | | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | -106.00 | -109.00 |
| | | | NR_FDD_FR1_G | | | | | | -105.00 | -108.00 |
| | | | NR_FDD_FR1_H | | | | | | -104.50 | -107.50 |
| Io ^{Note3} | Config 1,2,4,5 | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 6</small> | dBm/ 9.36MHz | -70.09 | | -52.09 | -80.03 | | | |
| | | NR_FDD_FR1_B | | | | | | -79.53 | | |
| | | NR_TDD_FR1_C | | | | | | -79.03 | | |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | | -78.53 | | |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | -78.03 | | |
| | | NR_FDD_FR1_G | | | | | | -77.03 | | |
| | | NR_FDD_FR1_H | | | | | | -76.53 | | |
| | Config 3,6 | | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 6</small> | dBm/ 38.16MHz | Not applicable ^{Note 5} | | -51.99 | -73.94 | | |
| | | | NR_FDD_FR1_B | | | | | | -73.44 | |
| | | | NR_TDD_FR1_C | | | | | | -72.94 | |
| | | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | | -72.44 | |
| | | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | -71.94 | |
| | | | NR_FDD_FR1_G | | | | | | -70.94 | |
| | | | NR_FDD_FR1_H | | | | | | -70.44 | |
| Propagation condition | | | - | AWGN | | | | | | |
| Antenna configuration | | | | 1x2 | | | | | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 5: Subtest 1 is not used when testing with 30kHz SSB SCS</p> <p>Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification</p> | | | | | | | | | | |

A.4.7.1.1.3 Test Requirements

The SS-RSRP measurement accuracy for cell 2 and cell 3 shall fulfil absolute requirement in clause 10.1.2.1.1 and relative requirement in clause 10.1.2.1.2.

A.4.7.1.2 EN-DC inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.4.1.1 and 10.1.4.1.2 for inter-frequency measurements with the testing configurations in Table A.4.7.1.2.1-1.

Table A.4.7.1.2.1-1: Applicable NR configurations for FR1 inter-frequency SS-RSRP accuracy test

| Config | Description |
|--------|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |

Note: The UE is only required to be tested in one of the supported test configurations on each supported band

A.4.7.1.2.2 Test parameters

In this set of test cases there are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on a different frequency than the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.4.7.1.2.2-1 below. Both absolute and relative accuracy of RSRP inter-frequency measurements are tested by using the parameters in Table A.4.7.1.2.2-1. The inter-frequency measurements are supported by a measurement gap.

Table A.4.7.1.2.2-1: SS-RSRP inter-frequency test parameters

| Parameter | Config | Unit | Test 1 | | Test 2 | |
|-------------------------------------|--------|------|-----------------------------|--------|-----------------------------|--------|
| | | | Cell 2 | Cell 3 | Cell 2 | Cell 3 |
| SSB ARFCN | 1~6 | | freq1 | freq2 | freq1 | freq2 |
| BW _{channel} | 1,4 | MHz | 10: N _{RB,c} = 52 | | 10: N _{RB,c} = 52 | |
| | 2,5 | | 10: N _{RB,c} = 52 | | 10: N _{RB,c} = 52 | |
| | 3,6 | | 40: N _{RB,c} = 106 | | 40: N _{RB,c} = 106 | |
| Gap pattern ID | | | 0 | | 0 | |
| Duplex mode | 1,4 | | FDD | | FDD | |
| | 2,5 | | TDD | | TDD | |
| | 3,6 | | TDD | | TDD | |
| TDD configuration | 1,4 | | N/A | | N/A | |
| | 2,5 | | TDDConf.1.1 | | TDDConf.1.1 | |
| | 3,6 | | TDDConf.2.1 | | TDDConf.2.1 | |
| PDSCH Reference measurement channel | 1,4 | | SR.1.1 FDD | - | SR.1.1 FDD | - |
| | 2,5 | | SR.1.1 TDD | | SR.1.1 TDD | |
| | 3,6 | | SR.2.1 FDD | | SR.2.1 FDD | |
| RMSI CORESET Reference Channel | 1,4 | | CR.1.1 FDD | - | CR.1.1 FDD | - |
| | 2,5 | | CR.1.1 TDD | | CR.1.1 TDD | |
| | 3,6 | | CR.2.1 FDD | | CR.2.1 FDD | |
| Dedicated CORESET Reference Channel | 1,4 | | CCR.1.1 FDD | - | CCR.1.1 FDD | - |
| | 2,5 | | CCR.1.1 TDD | | CCR.1.1 TDD | |

| | | | | | | | |
|--|-------------------------------|--|------------------------|--------------|------------------------|----------------------------|--|
| | 3,6 | | CCR.2.1 TDD | - | CCR.2.1 TDD | - | |
| SSB configuration | 1,4 | | SSB.1 FR1 | | SSB.1 FR1 | | |
| | 2,5 | | SSB.1 FR1 | | SSB.1 FR1 | | |
| | 3,6 | | SSB.2 FR1 | | SSB.2 FR1 | | |
| OCNG Patterns | 1~6 | | OP.1 | | OP.1 | | |
| TRS configuration | 1,4 | | TRS.1.1 FDD | | TRS.1.1 FDD | | |
| | 2,5 | | TRS.1.1 TDD | - | TRS.1.1 TDD | - | |
| | 3,6 | | TRS.1.2 TDD | | TRS.1.2 TDD | | |
| Initial BWP Configuration | 1~6 | | DLBWP.0.1 ULBWP.0.1 | | DLBWP.0.1 ULBWP.0.1 | | |
| Dedicated BWP configuration | 1~6 | | DLBWP.1.1 ULBWP.1.1 | | DLBWP.1.1 ULBWP.1.1 | | |
| Time offset with Cell 2 | 1,4 | ms | - | 3 | - | 3 | |
| | 2,3,5,6 | µs | - | 3 | - | 3 | |
| SMTC configuration | 1,4 | | SMTC.2 | | SMTC.2 | | |
| | 2,3,5,6 | | SMTC.1 | | SMTC.1 | | |
| EPRE ratio of PSS to SSS | 1~6 | dB | 0 | 0 | 0 | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | | | | | |
| N_{oc} ^{Note2} | | | | | | | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 5</small> |
| | NR_FDD_FR1_B | -114.5 | | | | | |
| | NR_TDD_FR1_C | -114 | | | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | -113.5 | | | | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | -113 | | | | | |
| | NR_FDD_FR1_G | -112 | | | | | |
| | NR_FDD_FR1_H | -111.5 | | | | | |
| | N_{oc} ^{Note2} | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 5</small> | 1,2,4,5 | dBm/SS B SCS | -94.65 | $(N_{oc}$ for Cell 3 +8dB) | -115 |
| NR_FDD_FR1_B | | -114.5 | | | | | |
| NR_TDD_FR1_C | | -114 | | | | | |
| NR_FDD_FR1_D, NR_TDD_FR1_D | | -113.5 | | | | | |
| NR_FDD_FR1_E, NR_TDD_FR1_E | | -113 | | | | | |
| NR_FDD_FR1_G | | -112 | | | | | |
| NR_FDD_FR1_H | | -111.5 | | | | | |
| NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 5</small> | | 3,6 | | | | $(N_{oc}$ for C 3 +8dB) | -112.00 |
| NR_FDD_FR1_B | | | | | | | -112.50 |
| NR_TDD_FR1_C | | | | | | | -112.00 |

| | | | | | | | | |
|---------------------------------|---|---------|---------------------|----------------------|---|---|---------|--------|
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | | -111.50 | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | -111.00 | |
| | NR_FDD_FR1_G | | | | | | -110.00 | |
| | NR_FDD_FR1_H | | | | | | -110.50 | |
| | \hat{E}_s / I_{ot} | 1~6 | dB | 10 | 10 | 13 | -3 | |
| SS- RSRP ^{Note3} | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 5,</small> | 1,2,4,5 | dBm/SC S | -84.65 | (RSRP for Cell 3 +25dB) | | -118.00 | |
| | NR_FDD_FR1_B | | | | | | -117.50 | |
| | NR_TDD_FR1_C | | | | | | -117.00 | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | | -116.50 | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | -116.00 | |
| | NR_FDD_FR1_G | | | | | | -115.00 | |
| | NR_FDD_FR1_H | -114.50 | | | | | | |
| | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 5,</small> | 3,6 | | -81.65 | (RSRP for Cell 3 +25dB) | | -115.00 | |
| | NR_FDD_FR1_B | | | | | | -114.50 | |
| | NR_TDD_FR1_C | | | | | | -114.00 | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | | -113.50 | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | -113.00 | |
| | NR_FDD_FR1_G | | | | | | -112.00 | |
| | NR_FDD_FR1_H | -111.50 | | | | | | |
| I _o ^{Note3} | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 6,</small> | 1,2,4,5 | dBm/ 9.36MH z | -56.28 | (I _o for Channel 3 +19.75dB) | | -85.28 | |
| | NR_FDD_FR1_B | | | | | | -84.78 | |
| | NR_TDD_FR1_C | | | | | | -84.28 | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | | -83.78 | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | -83.28 | |
| | NR_FDD_FR1_G | | | | | | -82.28 | |
| | NR_FDD_FR1_H | -81.78 | | | | | | |
| | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 6,</small> | 3,6 | | dBm/ 38.16M Hz | -50.19 | (I _o for Channel 3 +19.75dB) | | -79.19 |
| | NR_FDD_FR1_B | | | | | | | -78.69 |
| | NR_TDD_FR1_C | | | | | | | -78.19 |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | | | -77.69 |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | | -77.19 |
| | NR_FDD_FR1_G | | | | | | | -76.19 |
| | NR_FDD_FR1_H | -75.69 | | | | | | |

| \hat{E}_s/N_{oc} | 1~6 | dB | 10 | 10 | 13 | -3 |
|-----------------------|--|----|------|----|------|----|
| Propagation condition | 1~6 | - | AWGN | | AWGN | |
| Antenna configuration | | | 1x2 | | 1x2 | |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | |
| Note 3: | RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | |
| Note 4: | RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | | | |
| Note 5: | The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification | | | | | |

A.4.7.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 2 and Cell 3 shall fulfil the Absolute requirement in clause 10.1.4.1.1 and Relative requirement in clause 10.1.4.1.2.

A.4.7.1.3 Void

A.4.7.2 SS-RSRQ

A.4.7.2.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.7.1.1.

A.4.7.2.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.4.7.2.1.2-1. The absolute accuracy of SS-RSRQ intra-frequency measurement is test by using the parameters in Table A.4.7.2.1.2-2. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1. In all test cases, Cell 2 is the PCell and Cell 3 is the target cell.

Table A.4.7.2.1.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

| Config | Description |
|--------|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations in each supported band |

Table A.4.7.2.1.2-2: SS-RSRQ Intra frequency test parameters

| Parameter | | Unit | Test 1 | | Test 2 | | Test 3 | |
|--|------------------|------|-----------------------------|--------|-------------|--------|-------------|--------|
| | | | Cell 2 | Cell 3 | Cell 2 | Cell 3 | Cell 2 | Cell 3 |
| SSB ARFCN | | | freq1 | | freq1 | | freq1 | |
| Duplex mode | Config 1,4 | | FDD | | | | | |
| | Config 2,3,5,6 | | TDD | | | | | |
| TDD configuration | Config 1,4 | | Not Applicable | | | | | |
| | Config 2,5 | | TDDConf.1.1 | | | | | |
| | Config 3,6 | | TDDConf.2.1 | | | | | |
| BW _{channel} | Config 1,4 | MHz | 10: N _{RB,c} = 52 | | | | | |
| | Config 2,5 | | 10: N _{RB,c} = 52 | | | | | |
| | Config 3,6 | | 40: N _{RB,c} = 106 | | | | | |
| BWP configuration | Initial DL BWP | | DLBWP.0.1 | | | | | |
| | Dedicated DL BWP | | DLBWP.1.1 | | | | | |
| | Initial UL BWP | | ULBWP.0.1 | | | | | |
| | Dedicated UL BWP | | ULBWP.1.1 | | | | | |
| DRX Cycle | | ms | Not Applicable | | | | | |
| PDSCH Reference measurement channel | Config 1,4 | | SR.1.1 FDD | | SR.1.1 FDD | | SR.1.1 FDD | |
| | Config 2,5 | | SR.1.1 TDD | - | SR.1.1 TDD | - | SR.1.1 TDD | - |
| | Config 3,6 | | SR.2.1 TDD | | SR.2.1 TDD | | SR.2.1 TDD | |
| RMSI CORESET Reference Channel | Config 1,4 | | CR.1.1 FDD | | CR.1.1 FDD | | CR.1.1 FDD | |
| | Config 2,5 | | CR.1.1 TDD | - | CR.1.1 TDD | - | CR.1.1 TDD | - |
| | Config 3,6 | | CR.2.1 TDD | | CR.2.1 TDD | | CR.2.1 TDD | |
| Control Channel RMC | Config 1,4 | | CCR.1.1 FDD | | CCR.1.1 FDD | | CCR.1.1 FDD | |
| | Config 2,5 | | CCR.1.1 TDD | - | CCR.1.1 TDD | - | CCR.1.1 TDD | - |
| | Config 3,6 | | CCR.2.1 TDD | | CCR.2.1 TDD | | CCR.2.1 TDD | |
| OCNG Patterns | | | OP. 1 | | | | | |
| SS-RSSI-Measurement | | | Not Applicable | | | | | |
| Time offset with Cell 2 | Config 1,4 | ms | - | 3 | - | 3 | - | 3 |
| | Config 2,3,5,6 | μs | - | 3 | - | 3 | - | 3 |
| SMTC configuration | Config 1,4 | | SMTC.2 | | | | | |
| | Config 2,3,5,6 | | SMTC.1 | | | | | |
| SSB configuration | Config 1,2,4,5 | | SSB.1 FR1 | | | | | |
| | Config 3,6 | | SSB.2 FR1 | | | | | |
| PDSCH/PDCCH subcarrier spacing | Config 1,2,4,5 | kHz | 15 kHz | | | | | |
| | Config 3,6 | | 30kHz | | | | | |
| EPRE ratio of PSS to SSS | | dB | 0 | 0 | 0 | 0 | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | | | |

| | | | | | | | | | |
|----------------------|-------------------|---|---------------|-------|------|--------|--------|--------|--------|
| N_{oc} Note2 | Config 1,2,4,5 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7 | dBm/15k Hz | -85 | -101 | -114 | | | |
| | | NR_FDD_FR1_B | | | | -113.5 | | | |
| | | NR_TDD_FR1_C | | | | -113 | | | |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -112.5 | | | |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -112 | | | |
| | | NR_FDD_FR1_G | | | | -111 | | | |
| | | NR_FDD_FR1_H | | | | -110.5 | | | |
| | Config 3,6 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7 | | -91 | - | -114 | | | |
| | | NR_FDD_FR1_B | | | | -113.5 | | | |
| | | NR_TDD_FR1_C | | | | -113 | | | |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -112.5 | | | |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -112 | | | |
| | | NR_FDD_FR1_G | | | | -111 | | | |
| | | NR_FDD_FR1_H | | | | -110.5 | | | |
| N_{oc} Note2 | Config 1,2,4,5 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7 | dBm/SC S | -85 | -101 | -114 | | | |
| | | NR_FDD_FR1_B | | | | -113.5 | | | |
| | | NR_TDD_FR1_C | | | | -113 | | | |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -112.5 | | | |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -112 | | | |
| | | NR_FDD_FR1_G | | | | -111 | | | |
| | | NR_FDD_FR1_H | | | | -110.5 | | | |
| | Config 3,6 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7 | | -88 | - | -111 | | | |
| | | NR_FDD_FR1_B | | | | -110.5 | | | |
| | | NR_TDD_FR1_C | | | | -110 | | | |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -109.5 | | | |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -109 | | | |
| | | NR_FDD_FR1_G | | | | -108 | | | |
| | | NR_FDD_FR1_H | | | | -107.5 | | | |
| \hat{E}_s/I_{ot} | | | dB | -1.76 | | -4.7 | | -5.46 | -5.46 |
| \hat{E}_s/N_{oc} | | | dB | 3 | 3 | -2.9 | -2.9 | -4 | -4 |
| SS- RSRP Note3 | Config 1,2,4,5 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7 | dBm/SC S | -82 | -82 | -103.9 | -103.9 | -118 | -118 |
| | | NR_FDD_FR1_B | | | | | | -117.5 | -117.5 |
| | | NR_TDD_FR1_C | | | | | | -117 | -117 |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | | -116.5 | -116.5 |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | -116 | -116 |

| | | | | | | | | | | |
|------------------------------------|---|---|----------------------|--------|--------|--------|-------|--------|--------|--|
| Config 3,6 | NR_FDD_FR1_G | | | | | | | -115 | -115 | |
| | NR_FDD_FR1_H | | | | | | | -114.5 | -114.5 | |
| | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7 | | | | | | | -115 | -115 | |
| | NR_FDD_FR1_B | | | | | | | -114.5 | -114.5 | |
| | NR_TDD_FR1_C | | | | | | | -114 | -114 | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | -85 | -85 | - | - | | -113.5 | -113.5 | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | | -113 | -113 | |
| | NR_FDD_FR1_G | | | | | | | -112 | -112 | |
| | NR_FDD_FR1_H | | | | | | | -111.5 | -111.5 | |
| SS-RSRQ ^{Note3} | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7 | | | | | | | | | |
| | NR_FDD_FR1_B | | | | | | | | | |
| | NR_TDD_FR1_C | | | | | | | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | dB | -14.77 | -14.77 | -16.76 | -16.76 | | -17.34 | -17.34 | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | | | | |
| | NR_FDD_FR1_G NR_FDD_FR1_H | | | | | | | | | |
| ^{Note3} I _o | Config 1,2,4,5 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7 | | | | | | -83.5 | | |
| | | NR_FDD_FR1_B | | | | | | -83 | | |
| | | NR_TDD_FR1_C | | | | | | -82.5 | | |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | dBm/ 9.36MHz | | -50 | | -70 | | -82 | |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | | -81.5 | |
| | | NR_FDD_FR1_G | | | | | | | -80.5 | |
| | NR_FDD_FR1_H | | | | | | | -80 | | |
| | Config 3,6 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7 | | | | | | | -77.4 | |
| | | NR_FDD_FR1_B | | | | | | | -76.9 | |
| | | NR_TDD_FR1_C | | | | | | | -76.4 | |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | dBm/ 38.16M Hz | | -50 | | - | | -75.9 | |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | | -75.4 | |
| NR_FDD_FR1_G | | | | | | | | -74.4 | | |
| NR_FDD_FR1_H | | | | | | | -73.9 | | | |
| Propagation condition | | - | AWGN | AWGN | AWGN | AWGN | AWGN | AWGN | AWGN | |
| Antenna configuration | | | 1x2 | 1x2 | 1x2 | 1x2 | 1x2 | 1x2 | 1x2 | |

| | |
|---------|--|
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. |
| Note 3: | SS-RSRQ, SS-RSRP, and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves. |
| Note 4: | SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. |
| Note 5: | NR operating band groups are as defined in Clause 3.5.2. |
| Note 6: | Subtest 2 is not used when testing with 30kHz SSB SCS. |
| Note 7: | The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification. |

A.4.7.2.1.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.7.1.1.

A.4.7.2.2 EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.9.1.1 and 10.1.9.1.2 for inter frequency measurement.

A.4.7.2.2.2 Test Parameters

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.4.7.2.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-RSRQ inter-frequency measurement are tested by using test parameters in Table A.4.7.2.2.2-2. In all test cases, Cell 2 is the PSCell and Cell 3 is target cell. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1.

Table A.4.7.2.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

| Config | Description |
|--------|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |

Note: The UE is only required to be tested in one of the supported test configurations

Table A.4.7.2.2-2: SS-RSRQ Inter frequency test parameters

| Parameter | Unit | Test 1 | | Test 2 | | Test 3 | |
|-------------------|----------------|----------------|--------|--------|--------|--------|--------|
| | | Cell 2 | Cell 3 | Cell 2 | Cell 3 | Cell 2 | Cell 3 |
| SSB ARFCN | | freq1 | freq2 | freq1 | freq2 | freq1 | freq2 |
| Duplex mode | Config 1,4 | FDD | | | | | |
| | Config 2,3,5,6 | TDD | | | | | |
| TDD configuration | Config 1,4 | Not Applicable | | | | | |
| | Config 2,5 | TDDConf.1.1 | | | | | |

| | | | | | | | | | |
|--|----------------|--|-----------------------------|--------|-------------|------|-------------|------|------|
| | Config 3,6 | | TDDConf.2.1 | | | | | | |
| BW _{channel} | Config 1,4 | MHz | 10: N _{RB,c} = 52 | | | | | | |
| | Config 2,5 | | 10: N _{RB,c} = 52 | | | | | | |
| | Config 3,6 | | 40: N _{RB,c} = 106 | | | | | | |
| BWP BW | Config 1,4 | MHz | 10: N _{RB,c} = 52 | | | | | | |
| | Config 2,5 | | 10: N _{RB,c} = 52 | | | | | | |
| | Config 3,6 | | 40: N _{RB,c} = 106 | | | | | | |
| DRX Cycle | | ms | Not Applicable | | | | | | |
| PDSCH Reference measurement channel | Config 1,4 | | SR.1.1 FDD | | SR.1.1 FDD | | SR.1.1 FDD | | |
| | Config 2,5 | | SR.1.1 TDD | - | SR.1.1 TDD | - | SR.1.1 TDD | - | |
| | Config 3,6 | | SR.2.1 TDD | | SR.2.1 TDD | | SR.2.1 TDD | | |
| RMSI CORESET Reference Channel | Config 1,4 | | CR.1.1 FDD | | CR.1.1 FDD | | CR.1.1 FDD | | |
| | Config 2,5 | | CR.1.1 TDD | - | CR.1.1 TDD | - | CR.1.1 TDD | - | |
| | Config 3,6 | | CR.2.1 TDD | | CR.2.1 TDD | | CR.2.1 TDD | | |
| Dedicated CORESET Reference Channel | Config 1,4 | | CCR.1.1 FDD | | CCR.1.1 FDD | | CCR.1.1 FDD | | |
| | Config 2,5 | | CCR.1.1 TDD | - | CCR.1.1 TDD | - | CCR.1.1 TDD | - | |
| | Config 3,6 | | CCR.2.1 TDD | | CCR.2.1 TDD | | CCR.2.1 TDD | | |
| OCNG Patterns | | | OCNG pattern 1 | | | | | | |
| Time offset with Cell 2 | Config 1,4 | ms | - | 3 | - | 3 | - | 3 | |
| | Config 2,3,5,6 | µs | - | 3 | - | 3 | - | 3 | |
| SMTC configuration | Config 1,4 | | SMTC pattern 2 | | | | | | |
| | Config 2,3,5,6 | | SMTC pattern 1 | | | | | | |
| SSB configuration | Config 1,2,4,5 | | SSB pattern 1 in FR1 | | | | | | |
| | Config 3,6 | | SSB pattern 2 in FR1 | | | | | | |
| PDSCH/PDCCH subcarrier spacing | Config 1,2,4,5 | kHz | 15 kHz | | | | | | |
| | Config 3,6 | | 30 kHz | | | | | | |
| EPRE ratio of PSS to SSS | | dB | 0 | 0 | 0 | 0 | 0 | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | | | | |
| N _{oc} ^{Note2} | Config 1,2,4,5 | NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A | dBm/15kHz | -80.18 | -80.18 | -106 | -106 | -116 | -116 |

| | | | | | | | | | |
|------------------------------|----------------|--------------|----|-------|-------|-------|-------|--------|--------|
| | | NR_FDD_FR1_B | | | | | | -115.5 | -115.5 |
| | | NR_TDD_FR1_C | | | | | | -115 | -115 |
| | | NR_FDD_FR1_D | | | | | | -114.5 | -114.5 |
| | | NR_TDD_FR1_D | | | | | | | |
| | | NR_FDD_FR1_E | | | | | | -114 | -114 |
| | | NR_TDD_FR1_E | | | | | | -113 | -113 |
| | | NR_FDD_FR1_G | | | | | | -112.5 | -112.5 |
| | Config 3,6 | NR_FDD_FR1_A | | | | | | -116 | -116 |
| | | NR_TDD_FR1_A | | | | | | -115.5 | -115.5 |
| | | NR_SDL_FR1_A | | | | | | -115 | -115 |
| | | NR_FDD_FR1_B | | | | | | -114.5 | -114.5 |
| | | NR_TDD_FR1_C | | | | | | -114 | -114 |
| | | NR_FDD_FR1_D | | | | | | -113 | -113 |
| | | NR_TDD_FR1_D | | | | | | -112.5 | -112.5 |
| N_{oc} ^{Note2} | Config 1,2,4,5 | NR_FDD_FR1_A | | | | | | -116 | -116 |
| | | NR_TDD_FR1_A | | | | | | -115.5 | -115.5 |
| | | NR_SDL_FR1_A | | | | | | -115 | -115 |
| | | NR_FDD_FR1_B | | | | | | -114.5 | -114.5 |
| | | NR_TDD_FR1_C | | | | | | -114 | -114 |
| | | NR_FDD_FR1_D | | | | | | -113 | -113 |
| | | NR_TDD_FR1_D | | | | | | -112.5 | -112.5 |
| | Config 3,6 | NR_FDD_FR1_A | | | | | | -113 | -113 |
| | | NR_TDD_FR1_A | | | | | | -112.5 | -112.5 |
| | | NR_SDL_FR1_A | | | | | | -112 | -112 |
| | | NR_FDD_FR1_B | | | | | | -111.5 | -111.5 |
| | | NR_TDD_FR1_C | | | | | | -111 | -111 |
| | | NR_FDD_FR1_D | | | | | | -110 | -110 |
| | | NR_TDD_FR1_D | | | | | | -109.5 | -109.5 |
| \hat{E}_s / I_{ot} | | | dB | -1.75 | -1.75 | -1.75 | -1.75 | 3 | -1.75 |
| \hat{E}_s / N_{oc} | | | dB | -1.75 | -1.75 | -1.75 | -1.75 | 3 | -1.75 |
| SS- RSRP ^{Note3} | Config 1,2,4,5 | NR_FDD_FR1_A | | | | | | -113 | - |
| | | NR_TDD_FR1_A | | | | | | -112.5 | 117.75 |
| | | NR_SDL_FR1_A | | | | | | - | 117.25 |
| | | NR_FDD_FR1_B | | | | | | -112 | 116.75 |
| | | NR_TDD_FR1_C | | | | | | -111.5 | 116.25 |
| | | NR_FDD_FR1_D | | | | | | -111 | 115.75 |
| | | NR_TDD_FR1_D | | | | | | -110 | 114.75 |
| | Config 3,6 | NR_FDD_FR1_E | | | | | | -109.5 | 114.25 |
| | | NR_TDD_FR1_E | | | | | | -110 | 114.75 |
| | | NR_FDD_FR1_G | | | | | | -109.5 | 114.25 |
| | | NR_FDD_FR1_H | | | | | | -110 | 114.75 |
| | | NR_TDD_FR1_C | | | | | | -109.5 | 114.25 |
| | | NR_FDD_FR1_D | | | | | | -109 | 113.75 |
| | | NR_TDD_FR1_D | | | | | | -108.5 | 113.25 |

| | | | | | | | | | | |
|--|----------------|--|------------------|--------|--------|--------|--------|--------|------|--------|
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | | | -108 | - | 112.75 |
| | | NR_FDD_FR1_G | | | | | | -107 | - | 111.75 |
| | | NR_FDD_FR1_H | | | | | | -106.5 | - | 111.25 |
| SS-RSRQ ^{Note3} | | NR_FDD_FR1_A NR_TDD_FR1_A | dB | -14.77 | -14.77 | -40.59 | -40.59 | -12.56 | - | -14.76 |
| | | NR_FDD_FR1_B | | | | | | | | |
| | | NR_TDD_FR1_C | | | | | | | | |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | | | | | |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | | | | | |
| | | NR_FDD_FR1_G | | | | | | | | |
| | | NR_FDD_FR1_H | | | | | | | | |
| Io ^{Note3} | Config 1,2,4,5 | NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A | dBm/ 9.36MHz | -50 | -50 | -75.83 | -75.83 | -83.28 | - | -85.83 |
| | | NR_FDD_FR1_B | | | | | | | | |
| | | NR_TDD_FR1_C | | | | | | | | |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | | | | | |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | | | | | |
| | | NR_FDD_FR1_G | | | | | | | | |
| | | NR_FDD_FR1_H | | | | | | | | |
| | Config 3,6 | NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A | dBm/ 38.16MHz | -50 | -50 | -76.73 | -76.73 | -77.19 | - | -79.73 |
| | | NR_FDD_FR1_B | | | | | | | | |
| | | NR_TDD_FR1_C | | | | | | | | |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | | | | | |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | | | | | |
| | | NR_FDD_FR1_G | | | | | | | | |
| | | NR_FDD_FR1_H | | | | | | | | |
| Propagation condition | | | | AWGN | AWGN | AWGN | AWGN | AWGN | AWGN | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 5: NR operating band groups are as defined in Section 3.5.2.</p> | | | | | | | | | | |

A.4.7.2.2.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in section 10.1.9.1.1 and 10.1.9.1.2.

A.4.7.3 SS-SINR

A.4.7.3.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.12.1.1.

A.4.7.3.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.4.7.3.1.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table A.4.7.3.1.2-2. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1. In all test cases, Cell 2 is the PCell and Cell 3 is the target cell.

Table A.4.7.3.1.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

| Config | Description |
|--------|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |

Note: The UE is only required to be tested in one of the supported test configurations

Table A.4.7.3.1.2-2: SS-SINR Intra frequency test parameters

| Parameter | | Unit | Test 1 | | Test 2 | |
|--------------------------------------|----------------|------|----------------|--------|------------|--------|
| | | | Cell 2 | Cell 3 | Cell 2 | Cell 3 |
| SSB ARFCN | | | freq1 | | freq1 | |
| Duplex mode | Config 1,4 | | FDD | | | |
| | Config 2,3,5,6 | | TDD | | | |
| TDD configuration | Config 1,4 | | Not Applicable | | | |
| | Config 2,5 | | TDDConf.1.1 | | | |
| | Config 3,6 | | TDDConf.2.1 | | | |
| Downlink initial BWP configuration | | | DLBWP.0.1 | | | |
| Downlink dedicated BWP configuration | | | DLBWP.1.1 | | | |
| Uplink initial BWP configuration | | | ULBWP.0.1 | | | |
| Uplink dedicated BWP configuration | | | ULBWP.1.1 | | | |
| DRX Cycle configuration | | ms | Not Applicable | | | |
| TRS configuration | Config 1, 4 | | TRS.1.1 FDD | | | |
| | Config 2, 5 | | TRS.1.1 TDD | | | |
| | Config 3, 6 | | TRS.1.2 TDD | | | |
| PDSCH Reference measurement channel | Config 1,4 | | SR.1.1 FDD | | SR.1.1 FDD | |
| | Config 2,5 | | SR.1.1 TDD | - | SR.1.1 TDD | - |
| | Config 3,6 | | SR.2.1 TDD | | SR.2.1 TDD | |
| RMSI CORESET Reference Channel | Config 1,4 | | CR.1.1 FDD | | CR.1.1 FDD | |
| | Config 2,5 | | CR.1.1 TDD | - | CR.1.1 TDD | |

| | | | | | | | |
|--|---|---|-----------------|-------------------------------|----------------|--------|----------------|
| | Config 3,6 | | CR.2.1 TDD | | CR.2.1 TDD | | |
| Dedicated CORESET Reference Channel | Config 1,4 | | CCR.1. 1 FDD | - | CCR.1.1 FDD | - | |
| | Config 2,5 | | CCR.1. 1 TDD | | CCR.1.1 TDD | | |
| | Config 3,6 | | CCR.2. 1 TDD | | CCR.2.1 TDD | | |
| OCNG Patterns | | | OP.1 | | | | |
| SS-RSSI-Measurement | | | Not Applicable | | | | |
| Time offset with Cell 2 | Config 1,4 | ms | - | 3 | - | 3 | |
| | Config 2,3,5,6 | µs | - | 3 | - | 3 | |
| SMTTC configuration | Config 1,4 | | SMTTC.2 | | | | |
| | Config 2,3,5,6 | | SMTTC.1 | | | | |
| SSB configuration | Config 1,2,4,5 | | SSB.1 FR1 | | | | |
| | Config 3,6 | | SSB.2 FR1 | | | | |
| PDSCH/PDCCH subcarrier spacing | Config 1,2,4,5 | kHz | 15 | | | | |
| | Config 3,6 | | 30 | | | | |
| EPRE ratio of PSS to SSS | | dB | 0 | 0 | 0 | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | | |
| N_{oc} ^{Note2} | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | | | | | | dBm/15kHz z |
| | NR_FDD_FR1_B | -115.5 | | | | | |
| | NR_TDD_FR1_C | -115 | | | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | -114.5 | | | | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | -114 | | | | | |
| | NR_FDD_FR1_G | -113 | | | | | |
| | NR_FDD_FR1_H | -112.5 | | | | | |
| N_{oc} ^{Note2} | Config 1,2,4,5 | dBm/SCS | -90 | Same as N_{oc} for 15kHz | | | |
| | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | | | -113 | | | |
| | NR_FDD_FR1_B | | | -112.5 | | | |
| | NR_TDD_FR1_C | | | -112 | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | -111.5 | | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | -111 | | | |
| | NR_FDD_FR1_G | | | -110 | | | |
| | NR_FDD_FR1_H | | | -109.5 | | | |
| \hat{E}_s / I_{ot} | | dB | 0 | -3.19 | -5.46 | -5.46 | |
| \hat{E}_s / N_{oc} | | dB | 4.54 | 2.66 | -4 | -4 | |
| SS- RSRP ^{Not e3} | Config 1,2,4,5 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | dBm/SCS | -88.46 | -90.34 | -120 | -120 |
| | | NR_FDD_FR1_B | | | | -119.5 | -119.5 |
| | | NR_TDD_FR1_C | | | | -119 | -119 |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -118.5 | -118.5 |

| | | | | | | | | | |
|---------------------------------|----------------|---|------------------|--------|-------|--------|--------|------|------|
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -118 | -118 | | |
| | | NR_FDD_FR1_G | | | | -117 | -117 | | |
| | | NR_FDD_FR1_H | | | | -116.5 | -116.5 | | |
| | Config 3,6 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | | | | -85.46 | -87.34 | -117 | -117 |
| | | NR_FDD_FR1_B | | | | -116.5 | -116.5 | | |
| | | NR_TDD_FR1_C | | | | -116 | -116 | | |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -115.5 | -115.5 | | |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -115 | -115 | | |
| NR_FDD_FR1_G | -114 | -114 | | | | | | | |
| NR_FDD_FR1_H | -113.5 | -113.5 | | | | | | | |
| SS-SINR ^{Note3} | | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | dB | 0 | -3.19 | -5.46 | -5.46 | | |
| I ₀ ^{Note3} | Config 1,2,4,5 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | dBm/ 9.36MHz | -57.5 | | -85.51 | | | |
| | | NR_FDD_FR1_B | | | | -85.01 | | | |
| | | NR_TDD_FR1_C | | | | -84.51 | | | |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -84.01 | | | |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -83.51 | | | |
| | | NR_FDD_FR1_G | | | | -82.51 | | | |
| | | NR_FDD_FR1_H | | | | -82.01 | | | |
| | Config 3,6 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | dBm/ 38.16MHz | -51.41 | | -79.41 | | | |
| | | NR_FDD_FR1_B | | | | -78.91 | | | |
| | | NR_TDD_FR1_C | | | | -78.41 | | | |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -77.91 | | | |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -77.41 | | | |
| | | NR_FDD_FR1_G | | | | -76.41 | | | |
| NR_FDD_FR1_H | -75.91 | | | | | | | | |
| Propagation condition | | | - | AWGN | | | | | |
| Antenna configuration | | | - | 1x2 | | | | | |

| | |
|---------|--|
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. |
| Note 3: | SS-SINR, SS-RSRP, and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves. |
| Note 4: | SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. |
| Note 5: | NR operating band groups are as defined in Clause 3.5.2. |
| Note 6: | The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification. |

A.4.7.3.1.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.12.1.1.

A.4.7.3.2 EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.14.1.1 and 10.1.14.1.2 for interfrequency measurement.

A.4.7.3.2.2 Test Parameters

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.4.7.3.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test parameters in Table A.4.7.3.2.2-2. In all test cases, Cell 2 is the PSCell and Cell 3 is target cell. Cell 1 is the E-UTRA cell of which specific test parameters for this test case are specified in Table A.3.7.2.1-1.

Table A.4.7.3.2.2-1: SS-SINR Inter frequency SS-SINR supported test configurations

| Config | Description |
|--------|--|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.4.7.3.2.2-1: SS-SINR Inter frequency test parameters

| Parameter | | Unit | Test 1 | | Test 2 | | Test 3 | |
|--------------------------------------|----------------|------|----------------|--------|-------------|--------|-------------|--------|
| | | | Cell 2 | Cell 3 | Cell 2 | Cell 3 | Cell 2 | Cell 3 |
| SSB ARFCN | | | freq1 | freq2 | freq1 | freq2 | freq1 | freq2 |
| Duplex mode | Config 1,4 | | FDD | | | | | |
| | Config 2,3,5,6 | | TDD | | | | | |
| TDD configuration | Config 1,4 | | Not Applicable | | | | | |
| | Config 2,5 | | TDDConf.1.1 | | | | | |
| | Config 3,6 | | TDDConf.2.1 | | | | | |
| Downlink initial BWP configuration | | | DLBWP.0.1 | | | | | |
| Downlink dedicated BWP configuration | | | DLBWP.1.1 | | | | | |
| Uplink initial BWP configuration | | | ULBWP.0.1 | | | | | |
| Uplink dedicated BWP configuration | | | ULBWP.1.1 | | | | | |
| DRX Cycle configuration | | ms | Not Applicable | | | | | |
| TRS configuration | Config 1, 4 | | TRS.1.1 FDD | | | | | |
| | Config 2, 5 | | TRS.1.1 TDD | | | | | |
| | Config 3, 6 | | TRS.1.2 TDD | | | | | |
| PDSCH Reference measurement channel | Config 1,4 | | SR.1.1 FDD | - | SR.1.1 FDD | - | SR.1.1 FDD | - |
| | Config 2,5 | | SR.1.1 TDD | - | SR.1.1 TDD | - | SR.1.1 TDD | - |
| | Config 3,6 | | SR.2.1 TDD | - | SR.2.1 TDD | - | SR.2.1 TDD | - |
| RMSI CORESET Reference Channel | Config 1,4 | | CR.1.1 FDD | - | CR.1.1 FDD | - | CR.1.1 FDD | - |
| | Config 2,5 | | CR.1.1 TDD | - | CR.1.1 TDD | - | CR.1.1 TDD | - |
| | Config 3,6 | | CR.2.1 TDD | - | CR.2.1 TDD | - | CR.2.1 TDD | - |
| Dedicated CORESET Reference Channel | Config 1,4 | | CCR.1.1 FDD | - | CCR.1.1 FDD | - | CCR.1.1 FDD | - |
| | Config 2,5 | | CCR.1.1 TDD | - | CCR.1.1 TDD | - | CCR.1.1 TDD | - |
| | Config 3,6 | | CCR.2.1 TDD | - | CCR.2.1 TDD | - | CCR.2.1 TDD | - |
| OCNG Patterns | | | OP.1 | | | | | |
| SS-RSSI-Measurement | | | Not Applicable | | | | | |
| SMTC configuration | | | SMTC.1 | | | | | |
| | Config 1,4 | ms | - | 3 | - | 3 | - | 3 |
| | Config 2,3,5,6 | µs | - | 3 | - | 3 | - | 3 |
| SMTC configuration | Config 1,4 | | SMTC.2 | | | | | |
| | Config 2,3,5,6 | | SMTC.1 | | | | | |
| SSB configuration | Config 1,2,4,5 | | SSB.1 FR1 | | | | | |
| | Config 3,6 | | SSB.2 FR1 | | | | | |
| PDSCH/PDCCH subcarrier spacing | Config 1,2,4,5 | kHz | 15 | | | | | |
| | Config 3,6 | | 30 | | | | | |
| EPRE ratio of PSS to SSS | | dB | 0 | 0 | 0 | 0 | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | 0 | 0 | 0 | 0 | 0 | 0 |
| EPRE ratio of PBCH to PBCH DMRS | | | 0 | 0 | 0 | 0 | 0 | 0 |

| | | | | | | | |
|--|----------------|---|---------------|--------|--------|----------------------------|--|
| EPRE ratio of PDCCH DMRS to SSS | | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | | |
| N_{oc} <small>Note2</small> | Config 1,2,4,5 | NR_FDD_FR1_A NR_TDD_FR1_A <small>NOTE 6</small> | dBm/15k Hz | -88 | -108.5 | -119.5 | |
| | | NR_FDD_FR1_B | | | | -119 | |
| | | NR_TDD_FR1_C | | | | -118.5 | |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | -118 | |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | -117.5 | |
| | | NR_FDD_FR1_G | | | | -116.5 | |
| | | NR_FDD_FR1_H | | | | -116 | |
| N_{oc} <small>Note2</small> | Config 1,2,4,5 | | dBm/SC S | -85 | -105.5 | Same as N_{oc} for 15kHz | |
| | | | | | | -116.5 | |
| | Config 3,6 | NR_FDD_FR1_A NR_TDD_FR1_A <small>NOTE 6</small> | | | | -116 | |
| | | NR_FDD_FR1_B | | | | -115.5 | |
| | | NR_TDD_FR1_C | | | | -115 | |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | -114.5 | |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | -114.5 | |
| NR_FDD_FR1_G | -113 | | | | | | |
| NR_FDD_FR1_H | | | | | | | |
| \hat{E}_s / I_{ot} | | | dB | -1.75 | 20 | -4.0 | |
| \hat{E}_s / N_{oc} | | | dB | -1.75 | 20 | -4.0 | |
| SS-RSRP ^{Not e3} | Config 1,2,4,5 | NR_FDD_FR1_A NR_TDD_FR1_A <small>NOTE 6</small> | dBm/SC S | -89.75 | -88.5 | -123.5 | |
| | | NR_FDD_FR1_B | | | | -123 | |
| | | NR_TDD_FR1_C | | | | -122.5 | |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | -122 | |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | -121.5 | |
| | | NR_FDD_FR1_G | | | | -120.5 | |
| | | NR_FDD_FR1_H | | | | -120 | |
| | Config 3,6 | NR_FDD_FR1_A NR_TDD_FR1_A <small>NOTE 6</small> | | -86.75 | -85.5 | -120.5 | |
| | | NR_FDD_FR1_B | | | | -120 | |
| | | NR_TDD_FR1_C | | | | -119.5 | |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | -119 | |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | -118.5 | |
| | | NR_FDD_FR1_G | | | | -117.5 | |
| | | NR_FDD_FR1_H | | | | -117 | |

| | | | | | | |
|---|----------------|--|------------------|--------|--------|--------|
| SS-SINR ^{Note3} | | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | dB | -1.75 | 20 | -4.0 |
| | | NR_FDD_FR1_B | | | | |
| | | NR_TDD_FR1_C | | | | |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | |
| | | NR_FDD_FR1_G | | | | |
| | | NR_FDD_FR1_H | | | | |
| Io ^{Note3} | Config 1,2,4,5 | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | dBm/ 9.36MHz | -57.83 | -60.5 | -90.09 |
| | | NR_FDD_FR1_B | | | | -89.59 |
| | | NR_TDD_FR1_C | | | | -89.09 |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | -88.59 |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | -88.09 |
| | | NR_FDD_FR1_G | | | | -87.09 |
| | | NR_FDD_FR1_H | | | | -86.59 |
| | Config 3,6 | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | dBm/ 38.16MHz | -51.73 | -54.41 | -84 |
| | | NR_FDD_FR1_B | | | | -83.5 |
| | | NR_TDD_FR1_C | | | | -83 |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | -82.5 |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | -82 |
| | | NR_FDD_FR1_G | | | | -81 |
| | | NR_FDD_FR1_H | | | | -80.5 |
| Propagation condition | | | - | AWGN | | |
| Antenna configuration | | | - | 1x2 | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 5: NR operating band groups are as defined in Clause 3.5.2.</p> <p>Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.</p> | | | | | | |

A.4.7.3.2.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.14.1.1 and 10.1.14.1.2.

A.4.7.4 L1-RSRP measurement for beam reporting

A.4.7.4.1 SSB based L1-RSRP measurement

A.4.7.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 9.5.2 and clause 10.1.19.1 for L1-RSRP measurements based on SSB with the testing configurations for NR cells in Table A.4.7.4.1.1-1.

Table A.4.7.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

| Config | Description |
|--------|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |

Note: The UE is only required to be tested in one of the supported test configurations in each supported band

A.4.7.4.1.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.7.4.1.2-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.4.7.4.1.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources. UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSB resources 0 and 1.

Table A.4.7.4.1.2-1: FR1 SSB based L1-RSRP test parameters

| Parameter | Config | Unit | Test 1 | Test 2 |
|-------------------------------------|--------|------|-----------------------------|-----------------------------|
| SSB GSCN | 1~6 | | freq1 | freq1 |
| Duplex mode | 1,4 | | FDD | FDD |
| | 2,5 | | TDD | TDD |
| | 3,6 | | TDD | TDD |
| TDD Configuration | 1,4 | | N/A | N/A |
| | 2,5 | | TDDConf.1.1 | TDDConf.1.1 |
| | 3,6 | | TDDConf.2.1 | TDDConf.2.1 |
| BW _{channel} | 1,4 | MHz | 10: N _{RB,c} = 52 | 10: N _{RB,c} = 52 |
| | 2,5 | | 10: N _{RB,c} = 52 | 10: N _{RB,c} = 52 |
| | 3,6 | | 40: N _{RB,c} = 106 | 40: N _{RB,c} = 106 |
| PDSCH Reference measurement channel | 1,4 | | SR.1.1 FDD | SR.1.1 FDD |
| | 2,5 | | SR.1.1 TDD | SR.1.1 TDD |
| | 3,6 | | SR.2.1 TDD | SR.2.1 TDD |
| RMSI CORESET Reference Channel | 1,4 | | CR.1.1 FDD | CR.1.1 FDD |
| | 2,5 | | CR.1.1 TDD | CR.1.1 TDD |
| | 3,6 | | CR.2.1 TDD | CR.2.1 TDD |
| | 1,4 | | CCR.1.1 FDD | CCR.1.1 FDD |

| | | | | | |
|---|---|---------|------------------------|------------------------|---|
| Dedicated CORESET Reference Channel | 2,5 | | CCR.1.1 TDD | CCR.1.1 TDD | |
| | 3,6 | | CCR.2.1 TDD | CCR.2.1 TDD | |
| SSB configuration | 1,4 | | SSB.3 FR1 | SSB.3 FR1 | |
| | 2,5 | | SSB.3 FR1 | SSB.3 FR1 | |
| | 3,6 | | SSB.4 FR1 | SSB.4 FR1 | |
| OCNG Patterns | 1~6 | | OP.1 | OP.1 | |
| TRS configuration | 1,4 | | TRS.1.1 FDD | TRS.1.1 FDD | |
| | 2,5 | | TRS.1.1 TDD | TRS.1.1 TDD | |
| | 3,6 | | TRS.1.2 TDD | TRS.1.2 TDD | |
| Initial BWP Configuration | 1~6 | | DLBWP.0.1 ULBWP.0.1 | DLBWP.0.1 ULBWP.0.1 | |
| Dedicated BWP configuration | 1~6 | | DLBWP.1.1 ULBWP.1.1 | DLBWP.1.1 ULBWP.1.1 | |
| SMTC configuration | 1~6 | | SMTC.1 | SMTC.1 | |
| reportConfigType | 1~6 | | periodic | periodic | |
| reportQuantity | 1~6 | | ssb-Index-RSRP | ssb-Index-RSRP | |
| Number of reported RS | 1~6 | | 2 | 2 | |
| L1-RSRP reporting period | 1~6 | | slot80 | slot80 | |
| EPRE ratio of PSS to SSS | 1~6 | dB | 0 | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | | | |
| N_{oc} Note2 | | | | | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 |
| | NR_FDD_FR1_B | -116.5 | | | |
| | NR_TDD_FR1_C | -116 | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | -115.5 | | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | -115 | | | |
| | NR_FDD_FR1_G | -114 | | | |
| | NR_FDD_FR1_H | -113.5 | | | |
| N_{oc} Note2 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 1,2,4,5 | dBm/SSB SCS | -94.65 | -117 |
| | NR_FDD_FR1_B | | | | -116.5 |
| | NR_TDD_FR1_C | | | | -116 |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -115.5 |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -115 |
| | NR_FDD_FR1_G | | | | -114 |
| | NR_FDD_FR1_H | | | | -113.5 |
| | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 3,6 | | -91.65 | -114 |
| | NR_FDD_FR1_B | | | | -113.5 |
| | NR_TDD_FR1_C | | | | -114 |

| | | | | | | |
|-----------------------|---|---------|-----------------|------------------|--------|--------|
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -112.5 | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -112 | |
| | NR_FDD_FR1_G | | | | -111 | |
| | NR_FDD_FR1_H | | | | -110.5 | |
| \hat{E}_s/I_{ot} | | 1~6 | dB | 10 | -3 | |
| SSB RSRP Note3 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 1,2,4,5 | dBm/SSB SCS | -84.65 | -120 | |
| | NR_FDD_FR1_B | | | | -119.5 | |
| | NR_TDD_FR1_C | | | | -119 | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -118.5 | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -118 | |
| | NR_FDD_FR1_G | | | | -117 | |
| | NR_FDD_FR1_H | -116.5 | | | | |
| | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 3,6 | | -81.65 | -117 | |
| | NR_FDD_FR1_B | | | | -116.5 | |
| | NR_TDD_FR1_C | | | | -116 | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -115.5 | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -115 | |
| | NR_FDD_FR1_G | | | | -114 | |
| | NR_FDD_FR1_H | | | | -113.5 | |
| | | | | | | |
| I_o Note3 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 1,2,4,5 | dBm/9.36 MHz | -56.28 | -87.28 | |
| | NR_FDD_FR1_B | | | | -86.78 | |
| | NR_TDD_FR1_C | | | | -86.28 | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -85.78 | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -85.28 | |
| | NR_FDD_FR1_G | | | | -84.28 | |
| | NR_FDD_FR1_H | -83.78 | | | | |
| | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 3,6 | | dBm/38.16 MHz | -50.19 | -81.19 |
| | NR_FDD_FR1_B | | | | | -80.69 |
| | NR_TDD_FR1_C | | | | | -80.19 |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | -79.69 |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | -79.19 |
| | NR_FDD_FR1_G | | | | | -78.19 |
| | NR_FDD_FR1_H | | | | | -77.69 |
| | | | | | | |
| \hat{E}_s/N_{oc} | | 1~6 | dB | 10 | -3 | |
| Propagation condition | | 1~6 | | AWGN | AWGN | |
| Antenna configuration | | 1~6 | | 1x2 | 1x2 | |

| | |
|---------|--|
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. |
| Note 3: | RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves. |
| Note 4: | RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. |
| Note 5: | The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification. |

A.4.7.4.1.3 Test Requirements

The L1-RSRP measurement accuracy for SSB#0 and SSB#1 of Cell 2 shall fulfil the requirements in clauses 10.1.19.1.

A.4.7.4.2 CSI-RS based L1-RSRP measurement on resource set with repetition off

A.4.7.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 9.5.3 and clause 10.1.19.2 for L1-RSRP measurements based on CSI-RS with the testing configurations for NR cells in Table A.4.7.4.2.1-1.

Table A.4.7.4.2.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

| Config | Description |
|--------|--|
| 1 | LTE FDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode |

Note: The UE is only required to be tested in one of the supported test configurations in each supported band

A.4.7.4.2.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.7.4.2.2-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.4.7.4.2.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB.

Table A.4.7.4.2.2-1: FR1 CSI-RS based L1-RSRP test parameters

| Parameter | Config | Unit | Test 1 | Test 2 |
|-------------|--------|------|--------|--------|
| SSB GSCN | 1~6 | | freq1 | freq1 |
| Duplex mode | 1,4 | | FDD | FDD |
| | 2,5 | | TDD | TDD |

| | | | | | | | | |
|---|---|------|-----------------------------|-----------------------------|-----|-----------|--------|--------|
| | 3,6 | | TDD | TDD | | | | |
| TDD Configuration | 1,4 | | N/A | N/A | | | | |
| | 2,5 | | TDDConf.1.1 | TDDConf.1.1 | | | | |
| | 3,6 | | TDDConf.2.1 | TDDConf.2.1 | | | | |
| BW _{channel} | 1,4 | MHz | 10: N _{RB,c} = 52 | 10: N _{RB,c} = 52 | | | | |
| | 2,5 | | 10: N _{RB,c} = 52 | 10: N _{RB,c} = 52 | | | | |
| | 3,6 | | 40: N _{RB,c} = 106 | 40: N _{RB,c} = 106 | | | | |
| PDSCH Reference measurement channel | 1,4 | | SR.1.1 FDD | SR.1.1 FDD | | | | |
| | 2,5 | | SR.1.1 TDD | SR.1.1 TDD | | | | |
| | 3,6 | | SR.2.1 TDD | SR.2.1 TDD | | | | |
| RMSI CORESET Reference Channel | 1,4 | | CR.1.1 FDD | CR.1.1 FDD | | | | |
| | 2,5 | | CR.1.1 TDD | CR.1.1 TDD | | | | |
| | 3,6 | | CR.2.1 TDD | CR.2.1 TDD | | | | |
| Dedicated CORESET Reference Channel | 1,4 | | CCR.1.1 FDD | CCR.1.1 FDD | | | | |
| | 2,5 | | CCR.1.1 TDD | CCR.1.1 TDD | | | | |
| | 3,6 | | CCR.2.1 TDD | CCR.2.1 TDD | | | | |
| SSB configuration | 1,4 | | SSB.1 FR1 | SSB.1 FR1 | | | | |
| | 2,5 | | SSB.1 FR1 | SSB.1 FR1 | | | | |
| | 3,6 | | SSB.2 FR1 | SSB.2 FR1 | | | | |
| OCNG Patterns | 1~6 | | OP.1 | OP.1 | | | | |
| TRS configuration | 1,4 | | TRS.1.1 FDD | TRS.1.1 FDD | | | | |
| | 2,5 | | TRS.1.1 TDD | TRS.1.1 TDD | | | | |
| | 3,6 | | TRS.1.2 TDD | TRS.1.2 TDD | | | | |
| Initial BWP Configuration | 1~6 | | DLBWP.0.1 ULBWP.0.1 | DLBWP.0.1 ULBWP.0.1 | | | | |
| Dedicated BWP configuration | 1~6 | | DLBWP.1.1 ULBWP.1.1 | DLBWP.1.1 ULBWP.1.1 | | | | |
| SMTC configuration | 1~6 | | SMTC.1 | SMTC.1 | | | | |
| CSI-RS | 1,4 | | CSI-RS 1.2 FDD | CSI-RS 1.2 FDD | | | | |
| | 2,5 | | CSI-RS 1.2 TDD | CSI-RS 1.2 TDD | | | | |
| | 3,6 | | CSI-RS 2.2 TDD | CSI-RS 2.2 FDD | | | | |
| reportConfigType | 1~6 | | periodic | periodic | | | | |
| reportQuantity | 1~6 | | cri-RSRP | cri-RSRP | | | | |
| Number of reported RS | 1~6 | | 2 | 2 | | | | |
| L1-RSRP reporting period | 1~6 | | slot80 | slot80 | | | | |
| EPRE ratio of PSS to SSS | | | | | | | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | 1~6 | dB | 0 | 0 | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | | | | | | |
| N_{oc} Note2 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | | | | 1~6 | dBm/15kHz | -94.65 | -117 |
| | NR_FDD_FR1_B | | | | | | | -116.5 |
| | NR_TDD_FR1_C | | | | | | | -116 |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | | | -115.5 |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | -115 | | | | | | |

| | | | | | |
|-------------------------|---|---------|-------------------|--------|--------|
| | NR_FDD_FR1_G | | | | -114 |
| | NR_FDD_FR1_H | | | | -113.5 |
| N_{oc} Note2 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 1,2,4,5 | dBm/CSI-RS SCS | -94.65 | -117 |
| | NR_FDD_FR1_B | | | | -116.5 |
| | NR_TDD_FR1_C | | | | -116 |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -115.5 |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -115 |
| | NR_FDD_FR1_G | | | | -114 |
| | NR_FDD_FR1_H | | | | -113.5 |
| | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 3,6 | | -91.65 | -114 |
| | NR_FDD_FR1_B | | | | -113.5 |
| | NR_TDD_FR1_C | | | | -114 |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -112.5 |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -112 |
| | NR_FDD_FR1_G | | | | -111 |
| | NR_FDD_FR1_H | | | | -110.5 |
| \hat{E}_s / I_{ot} | | 1~6 | dB | 10 | 10 |
| CSI-RS RSRP Note3 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 1,2,4,5 | dBm/CSI-RS SCS | -84.65 | -120 |
| | NR_FDD_FR1_B | | | | -119.5 |
| | NR_TDD_FR1_C | | | | -119 |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -118.5 |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -118 |
| | NR_FDD_FR1_G | | | | -117 |
| | NR_FDD_FR1_H | | | | -116.5 |
| | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 3,6 | | -81.65 | -117 |
| | NR_FDD_FR1_B | | | | -116.5 |
| | NR_TDD_FR1_C | | | | -116 |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -115.5 |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -115 |
| | NR_FDD_FR1_G | | | | -114 |
| | NR_FDD_FR1_H | | | | -113.5 |
| I_o Note3 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 1,2,4,5 | dBm/9.36 MHz | -56.28 | -87.28 |
| | NR_FDD_FR1_B | | | | -86.78 |
| | NR_TDD_FR1_C | | | | -86.28 |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -85.78 |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -85.28 |

| | | | | | |
|--|---|-----|------------------|--------|--------|
| | NR_FDD_FR1_G | | | | -84.28 |
| | NR_FDD_FR1_H | | | | -83.78 |
| | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 3,6 | dBm/38.16 MHz | -50.19 | -81.19 |
| | NR_FDD_FR1_B | | | | -80.69 |
| | NR_TDD_FR1_C | | | | -80.19 |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -79.69 |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -79.19 |
| | NR_FDD_FR1_G | | | | -78.19 |
| | NR_FDD_FR1_H | | | | -77.69 |
| | \hat{E}_s / N_{oc} | | | | 1~6 |
| | Propagation condition | 1~6 | | AWGN | AWGN |
| | Antenna configuration | 1~6 | | 1x2 | 1x2 |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.</p> | | | | | |

A.4.7.4.2.3 Test Requirements

The L1-RSRP measurement accuracy for CSI-RS#0 and CSI-RS#1 of Cell 2 shall fulfil the requirements in clauses 10.1.19.2.

A.4.7.5 SFTD accuracy

A.4.7.5.1 SFTD accuracy

A.4.7.5.1.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the SFTD measurement accuracy is within the specified limits. This test will verify the requirements as specified in clause 9.1.27 in TS 36.133 [15] for EN-DC SFTD measurements.

A.4.7.5.1.2 Test Parameters

Supported test configurations are shown in Table A.4.7.5.1.2-1. In this set of test cases there are two cells on different carriers. Cell 1 is E-UTRAN PCell and Cell 2 is NR FR1 PSCell. The test parameters of cell 1 are given in clause A.3.7.2.1. The test parameters of cell 2 are given in Table A.4.7.5.1.2-2. The SFTD between PCell and PSCell shall be set by the test equipment to one of the time differences in Table A.4.7.5.1.2-3.

Table A.4.7.5.1.2-1: Supported test configurations for SFTD accuracy

| Configuration | Description |
|---------------|---|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD |
| 4 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD |
| 5 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD |
| 6 | NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD |

Note: The UE is only required to be tested in one of the supported test configurations

Table A.4.7.5.1.2-2: Test parameters for SFTD accuracy

| Parameter | Config | Unit | Test 1 | |
|---|--------|-----------|-----------------------------|---|
| SSB GSCN | 1~6 | | freq1 | |
| Duplex mode | 1,4 | | FDD | |
| | 2,5 | | TDD | |
| | 3,6 | | TDD | |
| TDD Configuration | 1,4 | | N/A | |
| | 2,5 | | TDDConf.1.1 | |
| | 3,6 | | TDDConf.2.1 | |
| BW _{channel} | 1,4 | MHz | 10: N _{RB,c} = 52 | |
| | 2,5 | | 10: N _{RB,c} = 52 | |
| | 3,6 | | 40: N _{RB,c} = 106 | |
| PDSCH Reference measurement channel | 1,4 | | SR.1.1 FDD | |
| | 2,5 | | SR.1.1 TDD | |
| | 3,6 | | SR.2.1 TDD | |
| RMSI CORESET Reference Channel | 1,4 | | CR.1.1 FDD | |
| | 2,5 | | CR.1.1 TDD | |
| | 3,6 | | CR.2.1 TDD | |
| RMC CORESET Reference Channel | 1,4 | | CCR.1.1 FDD | |
| | 2,5 | | CCR.1.1 TDD | |
| | 3,6 | | CCR.2.1 TDD | |
| SSB configuration | 1,4 | | SSB.1 FR1 | |
| | 2,5 | | SSB.1 FR1 | |
| | 3,6 | | SSB.2 FR1 | |
| SMTc configuration | 1~6 | | SMTc.1 | |
| DL BWP configuration | 1~6 | | DLBWP.1.1 | |
| UL BWP configuration | 1~6 | | ULBWP.1.1 | |
| OCNG Patterns | 1~6 | | OP.1 | |
| EPRE ratio of PSS to SSS | 1~6 | dB | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | | |
| N _{oc} ^{Note2} | 1~6 | dBm/15kHz | -104 | |
| | | | | NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5} |
| | | | | NR_FDD_FR1_B |
| | | | | NR_TDD_FR1_C |
| | | | | NR_FDD_FR1_D, NR_TDD_FR1_D |
| | | | | NR_FDD_FR1_E, NR_TDD_FR1_E |
| | | | | NR_FDD_FR1_G |
| NR_FDD_FR1_H | | | | |

| | | | | | |
|-------------------------------|---|---------|--------------|---------------|--------|
| N_{oc} <small>Note2</small> | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 5</small> | 1,2,4,5 | dBm/SSB SCS | -104 | |
| | NR_FDD_FR1_B | | | | |
| | NR_TDD_FR1_C | | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | |
| | NR_FDD_FR1_G | | | | |
| | NR_FDD_FR1_H | | | | |
| | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 5</small> | 3,6 | | -101 | |
| | NR_FDD_FR1_B | | | | |
| | NR_TDD_FR1_C | | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | |
| | NR_FDD_FR1_G | | | | |
| | NR_FDD_FR1_H | | | | |
| \hat{E}_s/I_{ot} | 1~6 | dB | -3 | | |
| \hat{E}_s/N_{oc} | 1~6 | dB | -3 | | |
| SS-RSRP <small>Note3</small> | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 5</small> | 1,2,4,5 | dBm/SCS | -107 | |
| | NR_FDD_FR1_B | | | | |
| | NR_TDD_FR1_C | | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | |
| | NR_FDD_FR1_G | | | | |
| | NR_FDD_FR1_H | | | | |
| | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 5</small> | 3,6 | | -104 | |
| | NR_FDD_FR1_B | | | | |
| | NR_TDD_FR1_C | | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | |
| | NR_FDD_FR1_G | | | | |
| | NR_FDD_FR1_H | | | | |
| I_o <small>Note3</small> | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 5</small> | 1,2,4,5 | dBm/9.36 MHz | -74.28 | |
| | NR_FDD_FR1_B | | | | |
| | NR_TDD_FR1_C | | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | |
| | NR_FDD_FR1_G | | | | |
| | NR_FDD_FR1_H | | | | |
| | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 5</small> | 3,6 | | dBm/38.16 MHz | -68.18 |
| | NR_FDD_FR1_B | | | | |
| | NR_TDD_FR1_C | | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | |
| | NR_FDD_FR1_G | | | | |
| | NR_FDD_FR1_H | | | | |

| | | | |
|-----------------------|--|--|------|
| Propagation condition | 1~6 | | AWGN |
| Antenna configuration | 1~6 | | 1x2 |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | |
| Note 3: | SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | |
| Note 4: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | |
| Note 5: | The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification. | | |

Table A.4.7.5.1.2-3: Timing offsets for SFTD accuracy test

| Configuration | SFN offset between PCell and PSCell | Frame boundary offset between PCell and PSCell (Ts) |
|---------------|-------------------------------------|---|
| 1 | 100 | -122000 |
| 2 | 300 | -60540 |
| 3 | 500 | 1000 |
| 4 | 700 | 62540 |
| 5 | 900 | 124000 |

A.4.7.5.1.3 Test Requirements

The SFTD reported by the UE consists of 2 elements, SFN offset and frame boundary offset between PCell and PSCell. The reported SFTD accuracy shall fulfil the requirement in clause 9.1.27 in TS 36.133 [15].

A.4.7.5.2 Void

A.4.7.5.3 Void

A.4.8 Void

A.5 EN-DC tests with one or more NR cells in FR2

A.5.1 Void

A.5.2 Void

A.5.3 RRC_CONNECTED state mobility

A.5.3.1 Void

A.5.3.2 RRC Connection Mobility Control

A.5.3.2.1 Void

A.5.3.2.2 Random Access

A.5.3.2.2.1 Contention based random access test in FR2 for PSCell/SCell in EN-DC

A.5.3.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in clause 6.2.2.2 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7.2.1 and Cell 2 configured as PSCell or SCell in FR2. Supported test parameters are shown in Table A.5.3.2.2.1.1-1. UE capable of EN-DC with PSCell or SCell in FR2 needs to be tested by using the parameters in Table A.5.3.2.2.1.1-2 and Table A.5.3.2.2.1.1-3.

Table A.5.3.2.2.1.1-1: Supported test configurations for non-contention based random access test in FR2 for PSCell/SCell in EN-DC

| Config | Description |
|--------|---|
| 1 | LTE FDD, NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations depending on UE capability |

Table A.5.3.2.2.1.1-2: General test parameters for contention based random access test in FR2 for PSCell/SCell in EN-DC

| Parameter | | Unit | Test-1 | Comments |
|---|------------|------|----------------------|---|
| SSB Configuration | Config 1,2 | | SSB pattern 1 in FR2 | As defined in A.3.10, except for number of SSBs per SS-burst and SS/PBCH block index as below |
| Number of SSBs per SS-burst | | | 2 | Different from the definition in A.3.10 |
| SS/PBCH block index | | | 0,1 | Different from the definition in A.3.10 |
| Duplex Mode for Cell 2 | Config 1,2 | | TDD | |
| TDD Configuration | Config 1,2 | | TDDConf.3.1 | |
| OCNG Pattern ^{Note 1} | | | OCNG pattern 1 | As defined in A.3.2.1. |
| PDSCH parameters _{Note 2} | Config 1,2 | | SR3.X TDD | As defined in A.3.1.1. |
| NR RF Channel Number | | | 1 | |
| EPRE ratio of PSS to SSS | | dB | 0 | |
| EPRE ratio of PBCH_DMRS to SSS | | dB | | |
| EPRE ratio of PBCH to PBCH_DMRS | | dB | | |
| EPRE ratio of PDCCH_DMRS to SSS | | dB | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | dB | | |
| EPRE ratio of PDSCH_DMRS to SSS | | dB | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | dB | | |
| <p>Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.</p> <p>Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.</p> | | | | |

Table A.5.3.2.2.1.1-3: OTA-related test parameters for contention based random access test in FR2 for PSCell/SCell in EN-DC

| Parameter | | Unit | Test-1 | Comments |
|---|--------|------|--|--|
| AoA setup | | | Setup 2b | As defined in A.3.15.2.2. |
| Assumption for UE beams ^{Note 3} | | | Rough | |
| SSB with index 0 | SSB_RP | dB | [10] dB larger than SSB_RP for SSB index 1 | |
| SSB with index 1 | SSB_RP | dB | Minimum SSB_RP value is dependent on band and power class as specified for spherical coverage AoA in Table B.2.2-2 | |
| Configured UE transmitted power ($P_{\text{CMAX}, f, c}$) | | dBm | maximum value configurable for certain power class | As defined in clause 6.2.4 in TS 38.101-2. |
| PRACH Configuration | | | FR2 PRACH configuration 1 | As defined in A.3.8.3. |
| <i>preambleReceivedTargetPower</i> | | dBm | -60 | |
| Propagation Condition | | - | AWGN | |
| Note 1: No artificial noise is applied in this test. Note 2: void. Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation | | | | |

A.5.3.2.2.1.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.5.3.2.2.1.2.1 Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2.2.2.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *rsrp-ThresholdSSB*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -60 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.1.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.1.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -60 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.1.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.1.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -60 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.1.2.4 Receiving an UL grant for msg3 retransmission

To test the UE behavior specified in clause 6.2.2.2.1.4 the System Simulator shall provide an UL grant for msg3 retransmission following a successful Random Access Response.

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

A.5.3.2.2.1.2.5 Reception of an Incorrect Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element *not* matching the CCCH SDU transmitted in msg3 uplink message.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

A.5.3.2.2.1.2.6 Reception of a Correct Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element matching the CCCH SDU transmitted in the msg3 uplink message.

The UE shall send ACK if the Contention Resolution is successful.

A.5.3.2.2.1.2.7 Contention Resolution Timer expiry

To test the UE behavior specified in Clause 6.2.2.2.1.6 the System Simulator shall *not* send a response to a msg3.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

A.5.3.2.2.2 Non-contention based random access test in FR2 for PSCell/SCell in EN-DC

A.5.3.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in clause 6.2.2.2 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7.2.1 and Cell 2 configured as PSCell or SCell in FR2. Supported test parameters are shown in Table A.5.3.2.2.1-1. UE capable of EN-DC with PSCell or SCell in FR2 needs to be tested by using the parameters in Table A.5.3.2.2.1-2 and Table A.5.3.2.2.1-3 for SSB-based non-contention based random access test (Test 1) and CSI-RS-based non-contention based random access test (Test 2). Test 2 is only applicable to UE which supports csi-RSRP-AndRSRQ-MeasWithSSB or csi-RSRP-AndRSRQ-MeasWithoutSSB.

Table A.5.3.2.2.1-1: Supported test configurations for non-contention based random access test in FR2 for PSCell/SCell in EN-DC

| Config | Description |
|--------|---|
| 1 | LTE FDD, NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations depending on UE capability |

Table A.5.3.2.2.1-2: General test parameters for non-contention based random access test in FR2 for PSCell/SCell in EN-DC

| Parameter | | Unit | Test-1 | Test-2 | Comments |
|---|------------|------|----------------------|----------------------|--|
| SSB Configuration | Config 1,2 | | SSB pattern 1 in FR2 | SSB pattern 1 in FR2 | As defined in A.3.10, except of Number of SSBs per SS-burst and SS/PBCH block index as below |
| Number of SSBs per SS-burst | | | 2 | 2 | Different from the definition in A.3.10 |
| SS/PBCH block index | | | 0,1 | 0,1 | Different from the definition in A.3.10 |
| CSI-RS Configuration | Config 1,2 | | N/A | CSI-RS.3.1 TDD | As defined in A.3.1.4 |
| Duplex Mode for Cell 2 | Config 1,2 | | TDD | TDD | |
| TDD Configuration | Config 1,2 | | TDDConf.3.1 | TDDConf.3.1 | |
| OCNG Pattern ^{Note 1} | | | OCNG pattern 1 | OCNG pattern 1 | As defined in A.3.2.1. |
| PDSCH parameters ^{Note 2} | Config 1,2 | | SR3.X TDD | SR3.X TDD | As defined in A.3.1.1. |
| NR RF Channel Number | | | 1 | 1 | |
| EPRE ratio of PSS to SSS | | dB | 0 | 0 | |
| EPRE ratio of PBCH_DMRS to SSS | | dB | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | dB | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | dB | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | dB | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | dB | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | dB | | | |
| <p>Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.</p> <p>Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.</p> | | | | | |

Table A.5.3.2.2.1-3: OTA-related test parameters for non-contention based random access test in FR2 for PSCell/SCell in EN-DC

| Parameter | | Unit | Test-1 | Test-2 | Comments |
|---|--------|------|--|--|--|
| AoA setup | | | Setup 2b | Setup 2b | As defined in A.3.15.2.2. |
| Assumption for UE beams ^{Note 3} | | | Rough | Rough | |
| SSB with index 0 | SSB_RP | dB | [10] dB larger than SSB_RP for SSB index 1 | [10] dB larger than SSB_RP for SSB index 1 | |
| SSB with index 1 | SSB_RP | dB | Minimum SSB_RP value is dependent on band and power class as specified for spherical coverage AoA in Table B.2.2-2 | Minimum SSB_RP value is dependent on band and power class as specified for spherical coverage AoA in Table B.2.2-2 | |
| Configured UE transmitted power ($P_{\text{CMAX}, f, c}$) | | dBm | maximum value configurable for certain power class | maximum value configurable for certain power class | As defined in clause 6.2.4 in TS 38.101-2. |
| PRACH Configuration | | - | FR2 PRACH configuration 2 | FR2 PRACH configuration 3 | As defined in A.3.8.3. |
| <i>preambleReceivedTargetPower</i> | | dBm | -60 | -60 | |
| Propagation Condition | | - | AWGN | AWGN | |
| Note 1: No artificial noise is applied in this test. Note 2: void. Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation | | | | | |

A.5.3.2.2.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.5.3.2.2.2.1 SSB-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.2.1 for SSB-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -60 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.2.2 CSI-RS-based Random Access Preamble Transmission

In Test-2, to test the UE behavior specified in Clause 6.2.2.2.2.1 for CSI-RS-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the CSI-RS configured.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-OccasionList*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -60 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.2.3 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -60 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.2.4 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -60 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.3 Void

A.5.4 Timing

A.5.4.1 UE transmit timing

A.5.4.1.1 NR UE Transmit Timing Test for FR2

A.5.4.1.1.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeB and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1.2.

Supported test configurations are shown in Table 5.4.1.1.1-1.

Table A.5.4.1.1.1-1: Supported test configurations for FR2 PSCell

| Configuration | Description |
|---------------|--|
| 1 | LTE FDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz |
| 2 | LTE TDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz |

The test consists of E-UTRA PCell and NR PSCell. The configuration for E-UTRA is given in A.3.7.2.1. Tables A.5.4.1.1.1-2 and A.5.4.1.1.1-2A define the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.5.4.1.1.1-3.

Table A.5.4.1.1.1-2: Cell Specific Test Parameters for UL Transmit Timing test

| Parameter | Unit | Config | Test1 | Test2 | Band Group |
|-------------------------------------|------|--------|-----------------------------|------------------------|------------|
| SSB ARFCN | | 1,2 | Freq1 | Freq1 | |
| Duplex Mode | | 1,2 | TDD | | |
| TDD configuration | | 1,2 | TDDConf.3.1 | | |
| BW _{channel} | MHz | 1,2 | 100: N _{RB,c} = 66 | | |
| Initial BWP Configuration | | 1,2 | DLBWP.0.1 ULBWP.0.1 | | |
| Dedicated BWP Configuration | | 1,2 | DLBWP.1.1 ULBWP.1.1 | | |
| TRS Configuration | | 1,2 | TRS.2.1 TDD | | |
| TCI State | | 1,2 | CSI-RS.Config.0 | | |
| DRx Cycle | ms | 1,2 | N/A | DRX.8 ^{Note5} | |
| PDSCH Reference measurement channel | | 1,2 | SR.3.1 TDD | | |
| CORESET Reference Channel | | 1,2 | CR.3.1 TDD | | |
| OCNG Patterns | | 1,2 | OCNG pattern 1 | | |
| SSB Configuration | | 1,2 | SSB.4 FR2 | | |
| SMTC Configuration | | 1,2 | SMTC.1 | | |
| PDSCH/PDCCH subcarrier spacing | kHz | 1,2 | 120 | | |
| EPRE ratio of PSS to SSS | dB | 1,2 | 0 | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | | |

| | | | | | |
|--|--|-----|-----------------------------|-----------------------------|--|
| EPRE ratio of PBCH to PBCH DMRS | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | |
| Propagation condition | | 1,2 | AWGN | | |
| SRS Config | | 1,2 | SRSCConf.1 ^{Note6} | SRSCConf.2 ^{Note6} | |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | |
| Note 3: | SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | |
| Note 4: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | | |
| Note 5: | DRx related parameters are given in Table A.3.3.8-1 | | | | |
| Note 6: | SRS configs are given in Table A.5.4.1.1.1-3 | | | | |

Table A.5.4.1.1.1-2A: OTA related test parameters

| Parameter | Unit | Test 1 | Test 2 |
|---|--|--------------------------------------|--------|
| Angle of arrival configuration | | Setup 1 according to clause A.3.15.1 | |
| Assumption for UE beams ^{Note 6} | | Fine | |
| N_{oc} ^{Note1} | dBm/15kHz ^{Note4} | -112 | |
| N_{oc} ^{Note1} | dBm/SCS ^{Note3} | -103 | |
| \hat{E}_s/N_{oc} | dB | 4 | |
| SS-RSRP ^{Note2} | dBm/SCS ^{Note4} | -99 | |
| \hat{E}_s/I_{ot} | dB | 4 | |
| I_o ^{Note2} | dBm/95.04 MHz ^{Note4} | -68.5 | |
| Note 1: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | |
| Note 2: | SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | |
| Note 3: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | |
| Note 4: | Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone | | |
| Note 5: | As observed with 0dBi gain antenna at the centre of the quiet zone | | |
| Note 6: | Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation | | |

Table A.5.4.1.1.1-3: SRS Configuration for Timing Accuracy Test

| | Field | SRSCnf.1 | SRSCnf.2 | Comments |
|-----------------|-------------------------------------|----------|----------|--------------------------------------|
| SRS-ResourceSet | srs-ResourceSetId | 0 | 0 | |
| | srs-ResourceSetList | 0 | 0 | |
| | resourceType | Periodic | Periodic | |
| | Usage | Codebook | Codebook | |
| SRS-Resource | SRS-ResourceId | 0 | 0 | |
| | nrofSRS-Ports | Port1 | Port1 | |
| | transmissionComb | n2 | n2 | |
| | combOffset-n2 | 0 | 0 | |
| | cyclicShift-n2 | 0 | 0 | |
| | resourceMapping startPosition | 0 | 0 | |
| | resourceMapping nrofSymbols | n1 | n1 | |
| | resourceMapping repetitionFactor | n1 | n1 | |
| | freqDomainPosition | 0 | 0 | |
| | freqDomainShift | 0 | 0 | |
| | freqHopping c-SRS | 17 | 17 | Matches $N_{RB,c}$ |
| | freqHopping b-SRS | 0 | 0 | |
| | freqHopping b-hop | 0 | 0 | |
| | groupOrSequenceHopping | Neither | Neither | |
| | resourceType | Periodic | Periodic | |
| | periodicityAndOffset-p | sl1,0 | sl2560,4 | Offset to align with DRx periodicity |
| | sequenceId | 0 | 0 | Any 10 bit number |

Table A.5.4.1.1.1-4: Void**A.5.4.1.1.2 Test requirements**

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test

- 1) Set up E-UTRA PCell according to parameters given in Table A.3.7.2.2-1 and setup NR PSCell according to parameters given in Table A.5.4.1.1.1-1.
- 2) After connection set up with the cell, the test equipment will verify that the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB.
 - a. The N_{TA} offset value (in T_c units) is 13792
 - b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 7.1.2-1
- 3) The test system shall adjust the timing of the DL path by values given in Table A.5.4.1.1.2-1

Table A.5.4.1.1.2-1 Adjustment Value for DL Timing

| SCS of SSB signals (kHz) | Adjustment Value | |
|--------------------------|---------------------|---------------------|
| | Test1 | Test2 |
| 240 | +8*64T _c | +4*64T _c |

- 4) The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in Clause 7.1.2 Table 7.1.2-3 until the UE transmit timing offset is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ respective to the first detected path (in time) of DL SSB. Skip this step for test 2 with DRX configured.
- 5) The test system shall verify that the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment

A.5.4.2 UE timer accuracy

A.5.4.3 Timing advance

A.5.4.3.1 EN-DC FR2 timing advance adjustment accuracy

A.5.4.3.1.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3.

A.5.4.3.1.2 Test Parameters

Supported test configurations are shown in table A.5.4.3.1.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.5.4.3.1.2-2, A.5.4.3.1.2-3, A.5.4.3.1.2-3A and A.5.4.3.1.2-4. The configuration of Cell 1 (LTE PCell) is specified in clause A.3.7.2.1.

In all test cases, two cells are used. Cell 1 is the PCell in the primary Timing Advance Group (pTAG) and cell 2 is the PSCell is in the secondary Timing Advance Group (sTAG). Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands for sTAG are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.5.4.3.1.2-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured for PSCell in sTAG.

During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element for sTAG, as specified in clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31, which according to clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance for sTAG used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements for sTAG, with Timing Advance Command value specified in table A.5.4.3.1.2-2. This value shall result in changes of the timing advance for sTAG used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in clause 7.3.2.1, the UE adjusts its uplink timing at slot $n+k$ for a timing advance command received in slot n . This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in clause 5.2 in TS 38.321, shall be configured so that it does not expire in the duration of the test.

Table A.5.4.3.1.2-1: Timing advance supported test configurations

| Config | Description |
|--------|--|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.5.4.3.1.2-2: General test parameters for timing advance

| Parameter | Unit | Value | Comment |
|--|------|------------------------|---|
| RF channel number | | Cell 1: 1 Cell 2: 2 | 1 for E-UTRAN PCell 2 for NR PSCell |
| Initial DL BWP | | DLBWP.0.1 | As specified in Table A.3.9.2.1-1 |
| Dedicated DL BWP | | DLBWP.1.1 | As specified in Table A.3.9.2.2-1 |
| Initial UL BWP | | ULBWP.0.1 | As specified in Table A.3.9.3.1-1 |
| Dedicated UL BWP | | ULBWP.1.1 | As specified in Table A.3.9.3.2-1 |
| Timing Advance Command (T_A) value during T1 | | 31 | $N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2 |
| Timing Advance Command (T_A) value during T2 | | 39 | For 120 kHz SCS $N_{TA_new} = N_{TA_old} + 1024 * T_c$ (based on equation in clause 4.2 of TS 38.213 [3]) |
| T1 | s | 5 | |
| T2 | s | 5 | |

Table A.5.4.3.1.2-3: Cell specific test parameters for timing advance

| Parameter | Unit | Test1 | |
|-----------|------|-------|----|
| | | T1 | T2 |
| | | | |

| | | |
|---|-----|-----------------------------|
| Duplex mode | | TDD |
| TDD configuration | | TDDConf.3.1 |
| BW_{channel} | MHz | 100: $N_{\text{RB},c} = 66$ |
| BWP BW | MHz | 100: $N_{\text{RB},c} = 66$ |
| DRx Cycle | ms | Not Applicable |
| PDSCH Reference measurement channel | | SR.3.1 TDD |
| CORESET Reference Channel | | CR.3.1 TDD |
| TRS configuration | | TRS.2.1 TDD |
| TCI configuration | | CSI-RS.Config.0 |
| OCNG Patterns | | OCNG pattern 1 |
| SMTc configuration | | SMTc.1 FR2 |
| SSB configuration | | SSB.3 FR2 |
| PDSCH/PDCCH subcarrier spacing | kHz | 120 kHz |
| PUCCH/PUSCH subcarrier spacing | kHz | 120 kHz |
| EPRE ratio of PSS to SSS | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | |
| EPRE ratio of PBCH to PBCH DMRS | | |
| EPRE ratio of PDCCH DMRS to SSS | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | |
| EPRE ratio of PDSCH DMRS to SSS | | |
| EPRE ratio of PDSCH to PDSCH | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | |
| Propagation condition | - | AWGN |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | |

Table A.5.4.3.1.2-3A: OTA related test parameters

| Parameter | Unit | Test 1 | |
|---|--|--------------------------------------|----|
| | | T1 | T2 |
| Angle of arrival configuration | | Setup 1 according to clause A.3.15.1 | |
| Assumption for UE beams ^{Note 6} | | Fine | |
| N_{oc} ^{Note1} | dBm/15kHz ^{Note4} | -112 | |
| N_{oc} ^{Note1} | dBm/SCS ^{Note3} | -103 | |
| \hat{E}_s / N_{oc} | dB | 4 | |
| SS-RSRP ^{Note2} | dBm/SCS ^{Note4} | -99 | |
| \hat{E}_s / I_{ot} | dB | 4 | |
| I_o ^{Note2} | dBm/95.04 MHz ^{Note4} | -68.5 | |
| Note 1: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | |
| Note 2: | SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | |
| Note 3: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | |
| Note 4: | Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone | | |
| Note 5: | As observed with 0dBi gain antenna at the centre of the quiet zone | | |
| Note 6: | Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation | | |

Table A.5.4.3.1.2-4: Sounding Reference Symbol Configuration for timing advance

| Field | Value | Comment |
|--------------------------|--|---|
| c-SRS | 16 | Frequency hopping is disabled |
| b-SRS | 0 | |
| b-hop | 0 | |
| freqDomainPosition | 0 | Frequency domain position of SRS |
| freqDomainShift | 0 | |
| groupOrSequenceHopping | neither | No group or sequence hopping |
| SRS-PeriodicityAndOffset | sl5=0 | Once every 5 slots |
| pathlossReferenceRS | ssb-Index=0 | SSB #0 is used for SRS path loss estimation |
| usage | Codebook | Codebook based UL transmission |
| startPosition | 0 | resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition. |
| nrofSymbols | n1 | |
| repetitionFactor | n1 | transmissionComb setting |
| combOffset-n2 | 0 | |
| cyclicShift-n2 | 0 | |
| nrofSRS-Ports | port1 | Number of antenna ports used for SRS transmission |
| Note: | For further information see clause 6.3.2 in TS 38.331 [2]. | |

A.5.4.3.1.3 Test Requirements

The UE shall apply the signalled Timing Advance value for PSCell in sTAG to the transmission timing at the designated activation time i.e. $k+1$ slots after the reception of the timing advance command, where $k = 11$.

The Timing Advance adjustment accuracy for PSCell in sTAG shall be within the limits specified in clause 7.3.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.5.5 Signaling characteristics

A.5.5.1 Radio link Monitoring

In the following clause, any uplink signal transmitted by the UE is used for detecting the In-/Out-of-Sync state of the UE. In terms of measurement, the uplink signal is verified on the basis of the UE output power:

Editor note: The metric for the detection of the UE UL transmitted signal by the TE is FFS.

A.5.5.1.1 Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with SSB-based RLM RS in non-DRX mode

A.5.5.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to *'rlf'*. Supported test configurations are shown in table A.5.5.1.1.1-1. The test parameters are given in Tables A.5.5.1.1.1-2, A.5.5.1.1.1-3, and A.5.5.1.1.1-4 below. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-2. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.5.5.1.1.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states, and Figure A.5.5.1.1.1-2 shows the Time multiplexed downlink transmissions from each Angle of Arrival. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In addition to RLM-RS radio link monitoring using SSB index 0 and SSB index 1, the UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 1.

Table A.5.5.1.1.1-1: Supported test configurations for FR2 PSCell

| Configuration | Description |
|---------------|--|
| 1 | FDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | TDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to pass in one of the supported test configurations in FR2 |

Table A.5.5.1.1-2: General test parameters for FR2 out-of-sync testing in non-DRX mode

| Parameter | | Unit | Value |
|---|--|-------------|-----------------------------|
| | | | Test 1 |
| Active E-UTRA PCell | | | Cell 1 |
| E-UTRA RF Channel Number | | | 1 |
| Active PSCell | | | Cell 2 |
| RF Channel Number | | | 2 |
| Duplex mode | | Config 1, 2 | TDD |
| BW _{channel} | | Config 1, 2 | 100: N _{RB,c} = 66 |
| DL initial BWP configuration | | Config 1, 2 | DLBWP.0.1 |
| DL dedicated BWP configuration | | Config 1, 2 | DLBWP.1.1 |
| UL initial BWP configuration | | Config 1, 2 | ULBWP.0.1 |
| UL dedicated BWP configuration | | Config 1, 2 | ULBWP.1.1 |
| TDD Configuration | | Config 1, 2 | TDDConf.3.1 |
| CORESET Reference Channel | | Config 1, 2 | CR.3.1 TDD |
| SSB Configuration | | Config 1, 2 | SSB.1 FR2 |
| SMTTC Configuration | | Config 1, 2 | SMTTC.1 |
| PDSCH/PDCCH subcarrier spacing | | Config 1, 2 | 120 KHz |
| PRACH Configuration | | Config 1, 2 | Table A.3.8.3.4 |
| SSB index assigned as RLM RS | | Config 1, 2 | 0,1 |
| OCNG parameters | | | OP.2 |
| CP length | | | Normal |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average SSS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| REG bundle size | | | 6 |
| DRX | | | OFF |
| Gap pattern ID | | | gp0 |
| Layer 3 filtering | | | Enabled |
| T310 timer | | ms | 0 |
| T311 timer | | ms | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |
| CSI-RS for CSI reporting | | Config 1, 2 | CSI-RS.3.1 TDD |
| TCI states for PDCCH/PDSCH | | | TCI.State.2 |
| CSI-RS for tracking | | Config 1, 2 | TRS.2.1 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 9.68 |
| T3 | | s | 9.68 |
| D1 | | s | 9.64 |
| Note 1: All configurations are assigned to the UE prior to the start of time period T1. | | | |
| Note 2: UE-specific PDCCH is not transmitted after T1 starts. | | | |
| Note 3: E-UTRAN is in non-DRX mode under test. | | | |

Table A.5.5.1.1.1-3: OTA related cell specific test parameters for FR2 (Cell 2) for out-of-sync radio link monitoring tests in non-DRX mode

| Parameter | Unit | Test 1 | | | | | | |
|--|-------------|---------------------------|---------------------------------|----|----------|-----------------|-----|-----|
| | | T1 | T2 | T3 | T1 | T2 | T3 | |
| AoA setup | | Setup 3 defined in A.3.15 | | | | | | |
| | | AoA1 | | | AoA2 | | | |
| EPRE ratio of PDCCH DMRS to SSS | dB | 4 | | | Not sent | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | dB | 0 | | | | | | |
| EPRE ratio of PBCH DMRS to SSS | dB | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | dB | | | | | | | |
| EPRE ratio of PSS to SSS | dB | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | dB | | | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | dB | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS | dB | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | dB | | | | | | | |
| ssb-Index 0 SNR | Config 1, 2 | | | | dB | 2 | -6 | -15 |
| ssb-Index 1 SNR | Config 1, 2 | | Not sent | | | 2 | -15 | -15 |
| SNR on other channels and signals | Config 1, 2 | dB | 2 | | | N/A | | |
| N_{oc} | Config 1, 2 | dBm/15kHz | -92.1 | | | -92.1 | | |
| Time multiplexing of the downlink transmissions from each AoA | | | Defined in Figure A.5.5.1.1.1-2 | | | | | |
| Propagation condition | | | TDL-A 30ns 75Hz | | | TDL-A 30ns 75Hz | | |
| Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6. | | | | | | | | |

Table A.5.5.1.1.1-4: Measurement gap configuration for out-of-sync tests in non-DRX mode

| Field | Test 1 |
|---|--------|
| | Value |
| gapOffset | 0 |
| Note 1: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned. (Ensure that RLM RS is partially overlapped with measurement gap). | |

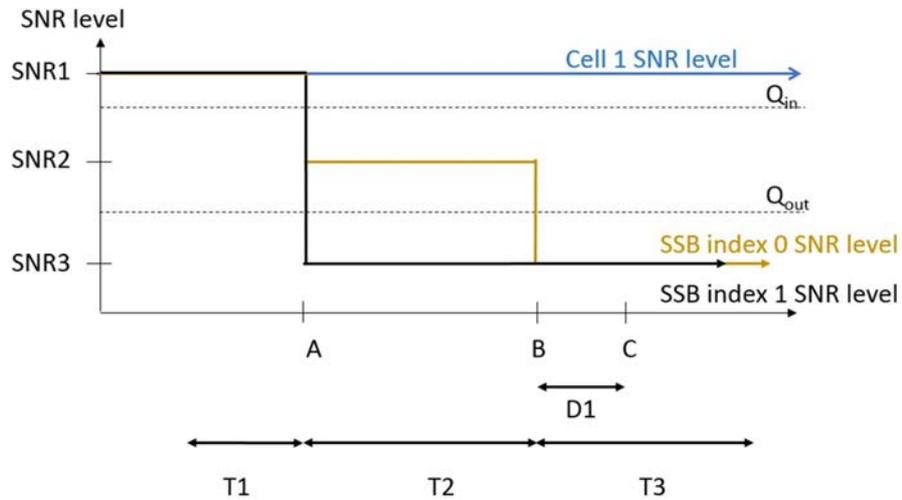


Figure A.5.5.1.1.1-1: SNR variation for out-of-sync testing

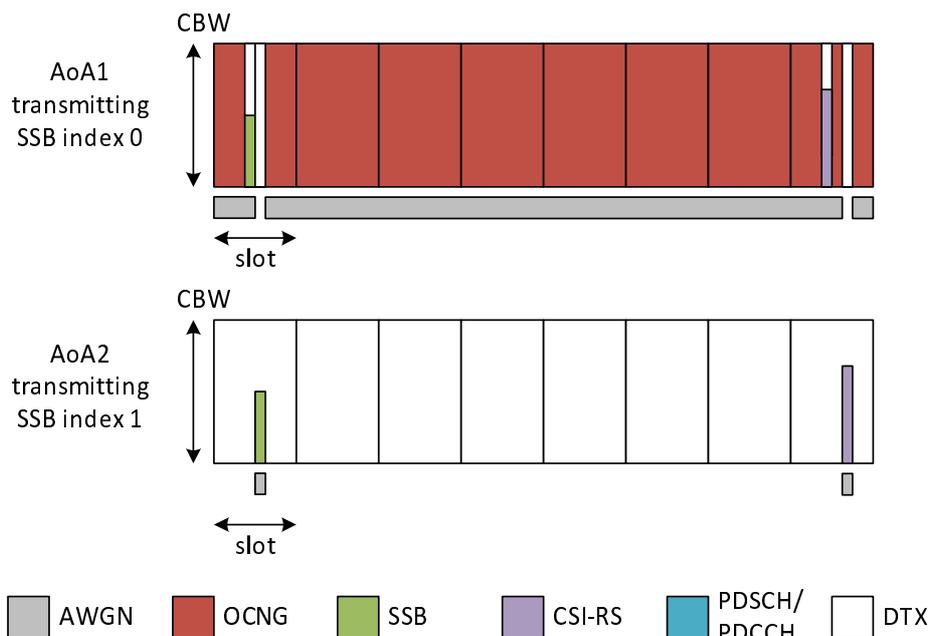


Figure A.5.5.1.1.1-2: Time multiplexed downlink transmissions

A.5.5.1.1.2 Test Requirements

The UE behavior in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal in Cell 2 no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.1.2 Radio Link Monitoring In-sync Test for FR2 PSCell configured with SSB-based RLM RS in non-DRX mode

A.5.5.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.5.5.1.2.1-1. The test parameters are given in Tables A.5.5.1.2.1-2, and A.5.5.1.2.1-3 below. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-2. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.1.2.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states, and Figure A.5.5.1.2.1-2 shows the Time multiplexed downlink transmissions from each Angle of Arrival. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms.

Table A.5.5.1.2.1-1: Supported test configurations for FR2 PSCell

| Configuration | Description |
|--|---|
| 1 | FDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | TDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to pass in one of the supported test configurations in FR2 | |

Table A.5.5.1.2.1-2: General test parameters for FR2 in-sync testing in non-DRX mode

| Parameter | | Unit | Value |
|--------------------------------|--|-------------|-----------------------------|
| | | | Test 1 |
| Active E-UTRA PCell | | | Cell 1 |
| E-UTRA RF Channel Number | | | 1 |
| Active PSCell | | | Cell 2 |
| RF Channel Number | | | 2 |
| Duplex mode | | Config 1, 2 | TDD |
| BW _{channel} | | Config 1, 2 | 100: N _{RB,c} = 66 |
| DL initial BWP configuration | | Config 1, 2 | DLBWP.0.1 |
| DL dedicated BWP configuration | | Config 1, 2 | DLBWP.1.1 |
| UL initial BWP configuration | | Config 1, 2 | ULBWP.0.1 |
| UL dedicated BWP configuration | | Config 1, 2 | ULBWP.1.1 |
| TDD Configuration | | Config 1, 2 | TDDConf.3.1 |
| CORESET Reference Channel | | Config 1, 2 | CR.3.1 TDD |
| SSB Configuration | | Config 1, 2 | SSB.1 FR2 |
| SMTc Configuration | | Config 1, 2 | SMTc.3 |
| PDSCH/PDCCH subcarrier spacing | | Config 1, 2 | 120 KHz |
| PRACH Configuration | | Config 1, 2 | Table A.3.8.3.4 |
| SSB index assigned as RLM RS | | Config 1, 2 | 0,1 |
| OCNG parameters | | | OP.2 |

| | | | |
|-------------------------------------|---|-----|-----------------|
| CP length | | | Normal |
| In sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 4 |
| | Ratio of hypothetical PDCCH RE energy to average SSS RE energy | dB | 0 |
| | Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | dB | 0 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average SSS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| DRX | | | <i>OFF</i> |
| Gap pattern ID | | | N.A. |
| Layer 3 filtering | | | <i>Enabled</i> |
| T310 timer | ms | | 4000 |
| T311 timer | ms | | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |
| CSI-RS for CSI reporting | Config 1, 2 | | CSI-RS.3.1 TDD |
| TCI states for PDCCH/PDSCH | | | TCI.State.2 |
| CSI-RS for tracking | Config 1, 2 | | TRS.2.1 TDD |
| T1 | s | | 0.2 |
| T2 | s | | 0.2 |
| T3 | s | | 1.88 |
| T4 | s | | 0.2 |
| T5 | s | | 3.84 |
| D1 | s | | 3.8 |
| Note 1: | All configurations are assigned to the UE prior to the start of time period T1. | | |
| Note 2: | UE-specific PDCCH is not transmitted after T1 starts. | | |
| Note 3: | E-UTRAN is in non-DRX mode under test. | | |

Table A.5.5.1.2.1-3: OTA related cell specific test parameters for FR2 (Cell 2) for in-sync radio link monitoring tests in non-DRX mode

| Parameter | Unit | Test 1 | | | | | | | | | | |
|---|-------------|---------------------------|---------------------------------|----|-----|------|----------|-----------------|-----|-----|-----|-----|
| | | T1 | T2 | T3 | T4 | T5 | T1 | T2 | T3 | T4 | T5 | |
| AoA setup | | Setup 3 defined in A.3.15 | | | | | | | | | | |
| | | AoA1 | | | | | AoA2 | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | dB | 4 | | | | | Not sent | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | dB | 0 | | | | | | | | | | |
| EPRE ratio of PBCH DMRS to SSS | dB | | | | | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | dB | | | | | | | | | | | |
| EPRE ratio of PSS to SSS | dB | | | | | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | dB | | | | | | | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | dB | | | | | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS | dB | | | | | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | dB | | | | | | | | | | | |
| ssb-Index 0 SNR | Config 1, 2 | dB | 2 | -6 | -15 | -4.5 | 2 | 2 | -15 | -15 | -15 | -15 |
| ssb-Index 1 SNR | Config 1, 2 | | Not sent | | | | | 2 | -15 | -15 | -15 | -15 |
| SNR on other channels and signals | Config 1, 2 | dB | 2 | | | | | N/A | | | | |
| N_{oc} | Config 1, 2 | dBm/15kHz | -92.1 | | | | | -92.1 | | | | |
| Time multiplexing of the downlink transmissions from each AoA | | | Defined in Figure A.5.5.1.2.1-2 | | | | | | | | | |
| Propagation condition | | | TDL-A 30ns 75Hz | | | | | TDL-A 30ns 75Hz | | | | |

- Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
- Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
- Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.

Table A.5.5.1.2.1-4: Void

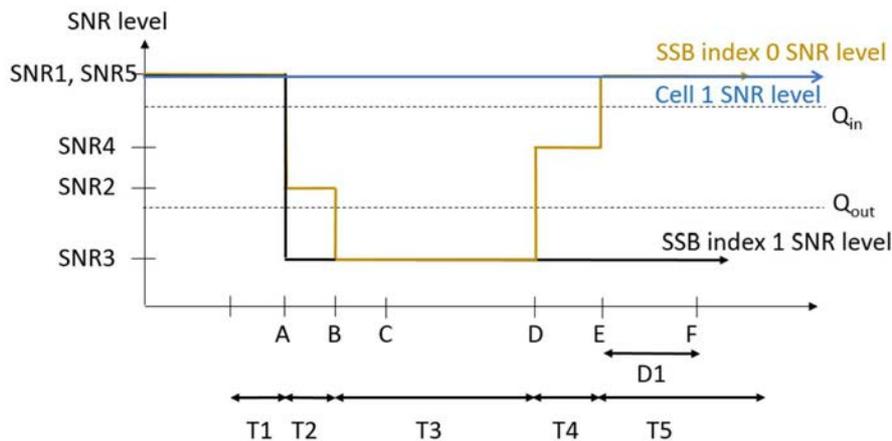


Figure A.5.5.1.2.1-1: SNR variation for in-sync testing

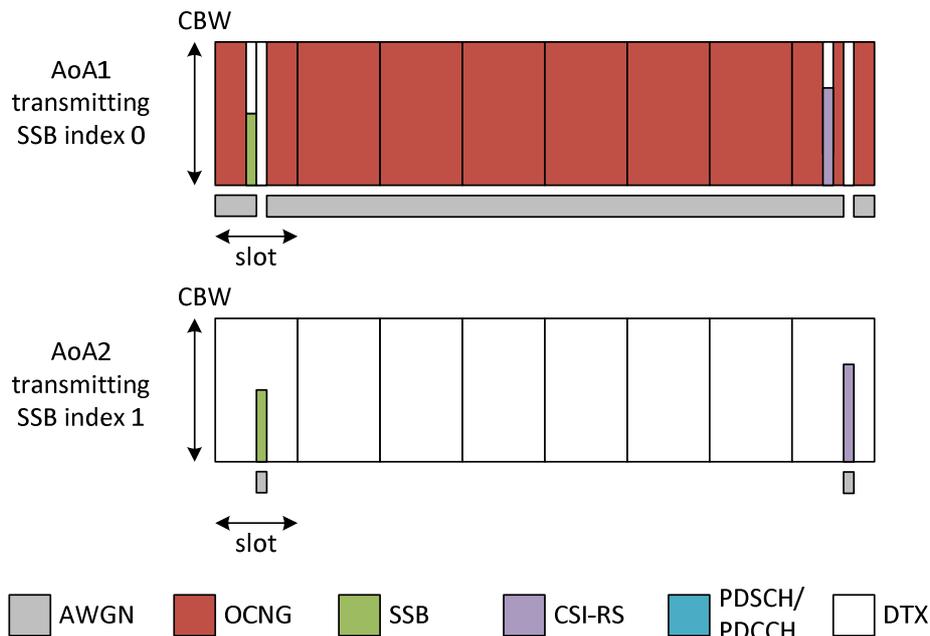


Figure A.5.5.1.2.1-2: Time multiplexed downlink transmissions

A.5.5.1.2.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.1.3 Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with SSB-based RLM RS in DRX mode

A.5.5.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell when DRX is used. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to *'rlf'*. Supported test configurations are shown in table A.5.5.1.3.1-1. The test parameters are given in Tables A.5.5.1.3.1-2, and A.5.5.1.3.1-3. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-2. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.5.5.1.3.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.5.5.1.3.1-1: Supported test configurations for FR2 PSCell

| Configuration | Description |
|--|---|
| 1 | FDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | TDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to pass in one of the supported test configurations in FR2 | |

Table A.5.5.1.3.1-2: General test parameters for FR2 out-of-sync testing in DRX mode

| Parameter | | Unit | Value |
|---|--|------|-----------------------------|
| | | | Test 1 |
| Active E-UTRA PCell | | | Cell 1 |
| E-UTRA RF Channel Number | | | 1 |
| Active PSCell | | | Cell 2 |
| RF Channel Number | | | 2 |
| Duplex mode | Config 1, 2 | | TDD |
| BW _{channel} | Config 1, 2 | | 100: N _{RB,c} = 66 |
| DL initial BWP configuration | Config 1, 2 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1, 2 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1, 2 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1, 2 | | ULBWP.1.1 |
| TDD Configuration | Config 1, 2 | | TDDConf.3.1 |
| CORESET Reference Channel | Config 1, 2 | | CR.3.1 TDD |
| SSB Configuration | Config 1, 2 | | SSB.1 FR2 |
| SMTC Configuration | Config 1, 2 | | SMTC.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2 | | 120 KHz |
| PRACH Configuration | Config 1, 2 | | Table A.3.8.3.4 |
| SSB index assigned as RLM RS | Config 1, 2 | | 0,1 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average SSS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| DRX Configuration | | | DRX.3 |
| Gap pattern ID | | | N.A. |
| Layer 3 filtering | | | Enabled |
| T310 timer | | ms | 0 |
| T311 timer | | ms | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |
| CSI-RS for CSI reporting | Config 1, 2 | | CSI-RS.3.1 TDD |
| TCI states for PDCCH/PDSCH | | | TCI.State.2 |
| CSI-RS for tracking | Config 1, 2 | | TRS.2.1 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 14.48 |
| T3 | | s | 14.48 |
| D1 | | s | 14.44 |
| Note 1: All configurations are assigned to the UE prior to the start of time period T1. | | | |
| Note 2: UE-specific PDCCH is not transmitted after T1 starts. | | | |
| Note 3: E-UTRAN is in non-DRX mode under test. | | | |

Table A.5.5.1.3.1-3: OTA related cell specific test parameters for FR2 (Cell 2) for out-of-sync radio link monitoring tests in DRX mode

| Parameter | | Unit | Test 1 | | |
|--|-------------|-------------|---------------------------|-----|-----|
| | | | T1 | T2 | T3 |
| AoA setup | | | Setup 1 defined in A.3.15 | | |
| EPRE ratio of PDCCH DMRS to SSS | | dB | 4 | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | dB | 0 | | |
| EPRE ratio of PBCH DMRS to SSS | | dB | 0 | | |
| EPRE ratio of PBCH to PBCH DMRS | | dB | | | |
| EPRE ratio of PSS to SSS | | dB | | | |
| EPRE ratio of PDSCH DMRS to SSS | | dB | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | dB | | | |
| EPRE ratio of OCNG DMRS to SSS | | dB | | | |
| EPRE ratio of OCNG to OCNG DMRS | | dB | | | |
| ssb-Index 0 SNR | Config 1, 2 | dB | 2 | -6 | -15 |
| ssb-Index 1 SNR | Config 1, 2 | dB | 2 | -15 | -15 |
| SNR on other channels and signals | | Config 1, 2 | 2 | | |
| N_{oc} | Config 1, 2 | dBm/15K Hz | -104.7dBm | | |
| Propagation condition | | | TDL-A 30ns 75Hz | | |
| Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6. | | | | | |

Table A.5.5.1.3.1-4: Void

Table A.5.5.1.3.1-5: Void

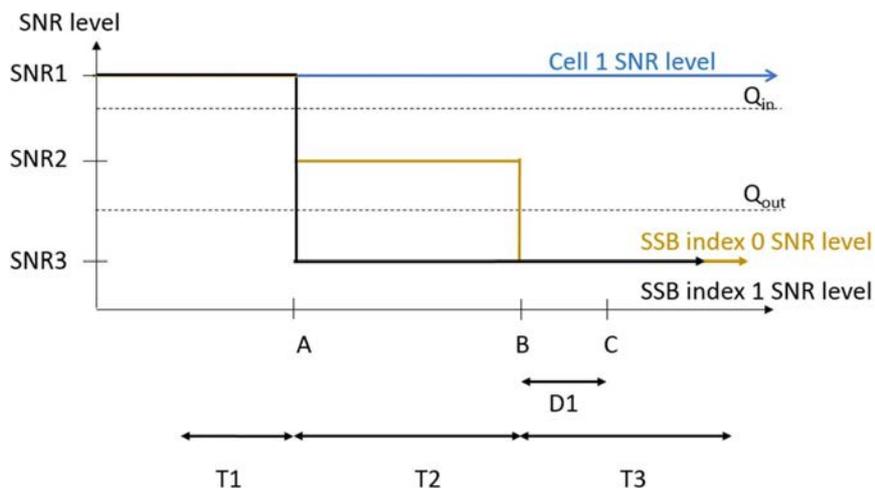


Figure A.5.5.1.3.1-1: SNR variation for out-of-sync testing

A.5.5.1.3.2 Test Requirements

The UE behavior in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal in Cell 2 no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.1.4 Radio Link Monitoring In-sync Test for FR2 PSCell configured with SSB-based RLM RS in DRX mode

A.5.5.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell when DRX is used. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.5.5.1.4.1-1. The test parameters are given in Tables A.5.5.1.4.1-2, and A.5.5.1.4.1-3. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-2. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.1.4.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.5.5.1.4.1-1: Supported test configurations for FR2 PSCell

| Configuration | Description |
|--|---|
| 1 | FDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | TDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to pass in one of the supported test configurations in FR2 | |

Table A.5.5.1.4.1-2: General test parameters for FR2 in-sync testing in DRX mode

| Parameter | | Unit | Value |
|------------------------------|-------------|------|-----------------------------|
| | | | Test 1 |
| Active E-UTRA PCell | | | Cell 1 |
| E-UTRA RF Channel Number | | | 1 |
| Active PSCell | | | Cell 2 |
| RF Channel Number | | | 2 |
| Duplex mode | Config 1, 2 | | TDD |
| BW _{channel} | Config 1, 2 | | 100: N _{RB,c} = 66 |
| DL initial BWP configuration | Config 1, 2 | | DLBWP.0.1 |

| | | | |
|---|--|-----|-----------------|
| DL dedicated BWP configuration | Config 1, 2 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1, 2 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1, 2 | | ULBWP.1.1 |
| TDD Configuration | Config 1, 2 | | TDDConf.3.1 |
| CORESET Reference Channel | Config 1, 2 | | CR.3.1 TDD |
| SSB Configuration | Config 1, 2 | | SSB.1 FR2 |
| SMTTC Configuration | Config 1, 2 | | SMTTC.3 |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2 | | 120 KHz |
| PRACH Configuration | Config 1, 2 | | Table A.3.8.3.4 |
| SSB index assigned as RLM RS | Config 1, 2 | | 0,1 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| In sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 4 |
| | Ratio of hypothetical PDCCH RE energy to average SSS RE energy | dB | 0 |
| | Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | dB | 0 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average SSS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| DRX Configuration | | | DRX.11 |
| Gap pattern ID | | | N.A. |
| Layer 3 filtering | | | <i>Enabled</i> |
| T310 timer | | ms | 4000 |
| T311 timer | | ms | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |
| CSI-RS for CSI reporting | Config 1, 2 | | CSI-RS.3.1 TDD |
| TCI states for PDCCH/PDSCH | | | TCI.State.2 |
| CSI-RS for tracking | Config 1, 2 | | TRS.2.1 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 0.2 |
| T3 | | s | 2.8 |
| T4 | | s | 0.2 |
| T5 | | s | 3.88 |
| D1 | | s | 3.84 |
| Note 1: All configurations are assigned to the UE prior to the start of time period T1. | | | |
| Note 2: UE-specific PDCCH is not transmitted after T1 starts. | | | |
| Note 3: E-UTRAN is in non-DRX mode under test. | | | |

Table A.5.5.1.4.1-3: OTA related cell specific test parameters for FR2 (Cell 2) for in-sync radio link monitoring test in DRX mode

| Parameter | | Unit | Test 1 | | | | |
|---|-------------|---------------|---------------------------|-----|-----|------|-----|
| | | | T1 | T2 | T3 | T4 | T5 |
| AoA setup | | | Setup 1 defined in A.3.15 | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | dB | 4 | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | dB | 0 | | | | |
| EPRE ratio of PBCH DMRS to SSS | | dB | 0 | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | dB | | | | | |
| EPRE ratio of PSS to SSS | | dB | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | dB | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | dB | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | dB | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | dB | | | | | |
| ssb-Index 0 SNR | Config 1, 2 | dB | 2 | -6 | -15 | -4.5 | 2 |
| ssb-Index 1 SNR | Config 1, 2 | dB | 2 | -15 | -15 | -15 | -15 |
| SNR on other channels and signals | | dB | 2 | | | | |
| N_{oc} | Config 1, 2 | dBm/1 5KHz | -104.7dBm | | | | |
| Propagation condition | | | TDL-A 30ns 75Hz | | | | |
| Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | | |
| Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.3 | | | | | | | |
| Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs. | | | | | | | |
| Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6. | | | | | | | |

Table A.5.5.1.4.1-4: Void**Table A.5.5.1.4.1-5: Void**

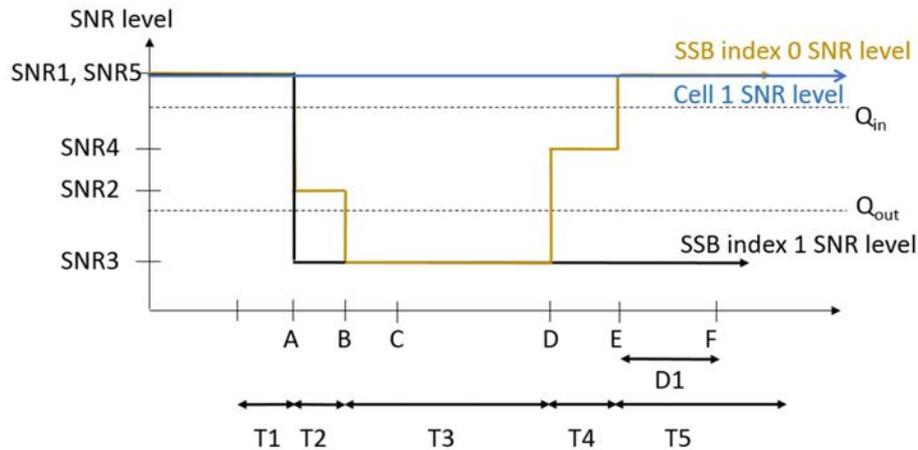


Figure A.5.5.1.4.1-1: SNR variation for in-sync testing.

A.5.5.1.4.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D_1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.1.5 EN-DC Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode

A.5.5.1.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR2 TDD PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.5.5.1.5.1-1, A.5.5.1.5.1-2, A.5.5.1.5.1-3 and A.5.5.1.5.1-3A below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.5.5.1.5.1-1 shows the variation of the downlink SNR in the E-UTRAN PCell and the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms). In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.5.5.1.5.1-1: Supported test configurations for FR2 PSCell

| Configuration | Description |
|--|---|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to pass in one of the supported test configurations in FR2 | |

Table A.5.5.1.5.1-2: General test parameters for FR2 PSCell for CSI-RS out-of-sync testing in non-DRX mode

| Parameter | | Unit | Value Test 1 |
|-------------------------------------|---|------|--|
| Active E-UTRA PCell | | | Cell 1 |
| E-UTRA RF Channel Number | | | 1 |
| Active PSCell | | | Cell 2 |
| RF Channel Number | | | 2 |
| Duplex Mode | | | TDD |
| TDD Configuration | Config 1 | | TDDConf.3.1 |
| | Config 2 | | TDDConf.3.1 |
| DL initial BWP configuration | Config 1, 2 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1, 2 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1, 2 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1, 2 | | ULBWP.1.1 |
| RMC CORESET Reference Channel | Config 1 | | CCR.3.1 TDD CCR.3.3 TDD |
| | Config 2 | | CCR.3.1 TDD CCR.3.3 TDD |
| SSB Configuration | Config 1 | | SSB.1 FR2 |
| | Config 2 | | SSB.1 FR2 |
| SMTc Configuration | Config 1 | | SMTc.1 |
| | Config 2 | | SMTc.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1 | | 120 KHz |
| | Config 2 | | 120 KHz |
| CSI-RS for RLM | Config 1, 2 | | Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD |
| TRS configuration | | | TRS.2.1 TDD TRS.2.2 TDD |
| TCI configuration for PDCCH#1/PDSCH | | | TCI.State.2 |
| TCI configuration for PDCCH#2 | | | TCI.State.3 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 4 |

| | | | |
|---|---|----|-----------------|
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| DRX | | | <i>OFF</i> |
| Gap pattern ID | | | <i>gp0</i> |
| Layer 3 filtering | | | <i>Enabled</i> |
| T310 timer | | ms | 0 |
| T311 timer | | ms | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |
| CSI-RS for CSI reporting | Config 1 | | CSI-RS.3.1 TDD |
| | Config 2 | | CSI-RS.3.1 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 0.35 |
| T3 | | s | 0.35 |
| D1 | | s | 0.31 |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | |
| Note 2: E-UTRAN is in non-DRX mode under test. | | | |

Table A.5.5.1.5.1-3: Cell specific test parameters for FR2 for CSI-RS out-of-sync radio link monitoring in non-DRX mode

| Parameter | | Unit | Test 1 | | | | | |
|-----------------------------------|-------------|---|---------------------------|----|-----|-----------------|-----|-----|
| | | | T1 | T2 | T3 | T1 | T2 | T3 |
| AoA setup | | | Setup 3 defined in A.3.15 | | | | | |
| | | | AoA1 | | | AoA2 | | |
| PDCCH_beta | | dB | 4 | | | Not sent | | |
| PDCCH_DMRS_beta | | dB | 4 | | | | | |
| PBCH_beta | | dB | 0 | | | | | |
| PSS_beta | | dB | | | | | | |
| SSS_beta | | dB | | | | | | |
| PDSCH_beta | | dB | | | | | | |
| OCNG_beta | | dB | | | | | | |
| SNR on RLM-RS1 | Config 1, 2 | dB | 2 | -6 | -15 | | | |
| SNR on RLM-RS2 | Config 1, 2 | | Not sent | | | 2 | -14 | -15 |
| SNR on other channels and signals | Config 1, 2 | dB | 2 | | | N/A | | |
| N_{oc} | Config 1, 2 | dBm/15kHz | TBD | | | TBD | | |
| Propagation condition | | | TDL-A 30ns 75Hz | | | TDL-A 30ns 75Hz | | |
| Note 1: | | OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | |
| Note 2: | | The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | | |
| Note 3: | | NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | | |
| Note 4: | | Measurement gap configuration is assigned to the UE prior to the start of time period T1. | | | | | | |
| Note 5: | | The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. | | | | | | |
| Note 6: | | The signal contains PDCCH for UEs other than the device under test as part of OCNG. | | | | | | |
| Note 7: | | SNR levels correspond to the signal to noise ratio over the SSS REs. | | | | | | |
| Note 8: | | The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.1.5.1-1. | | | | | | |
| Note 9: | | The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6. | | | | | | |

Table A.5.5.1.5.1-3A: Measurement gap configuration for FR2 CSI-RS out-of-sync radio link monitoring in non-DRX mode

| Field | Test 1 |
|--|--------|
| | Value |
| gapOffset | 0 |
| Note 1: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned. (Ensure that RLM RS is partially overlapped with measurement gap) | |

Table A.5.5.1.5.1-4: Void

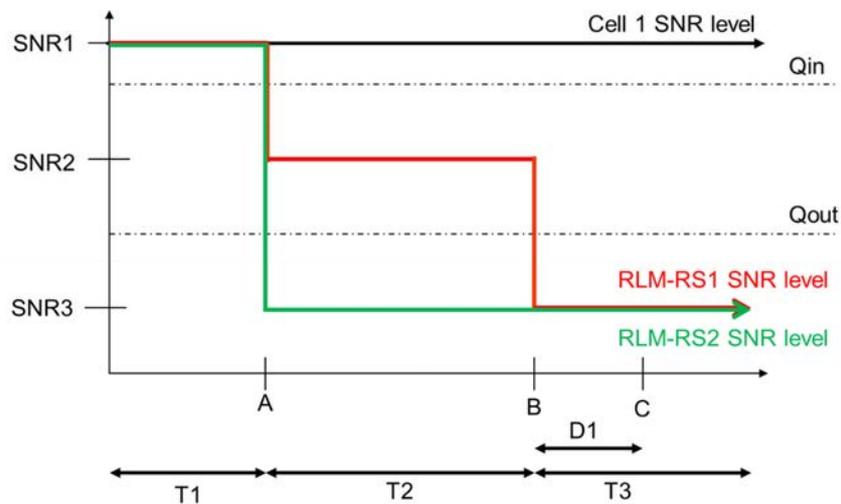


Figure A.5.5.1.5.1-1: SNR variation for CSI-RS out-of-sync testing

A.5.5.1.5.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 (PSCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

The UE shall stop transmitting uplink signal in Cell 2 (PSCell) no later than time point C (D_1 after the start of the time duration T3) on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.1.6 EN-DC Radio Link Monitoring In-sync Test for FR2 PSCell configured with CSI-RS-based RLM in non-DRX mode

A.5.5.1.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when no DRX is used. This test will partly verify the FR2 TDD PSCell CSI-RS In-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.5.5.1.6.1-1, A.5.5.1.6.1-2, and A.5.5.1.6.1-3 below. There are two cells, cell 1 which is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.1.6.1-1 shows the variation of the downlink SNR in the PSCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is not enabled. In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.5.5.1.6.1-1: Supported test configurations for FR2 PSCell

| Configuration | Description |
|--|---|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to pass in one of the supported test configurations in FR2 | |

Table A.5.5.1.6.1-2: General test parameters for FR2 PSCell for CSI-RS in-sync testing in non-DRX mode

| Parameter | | Unit | Value |
|-------------------------------------|---|------|--|
| | | | Test 1 |
| Active E-UTRA PCell | | | Cell 1 |
| E-UTRA RF Channel Number | | | 1 |
| Active PSCell | | | Cell 2 |
| RF Channel Number | | | 2 |
| Duplex Mode | | | TDD |
| TDD Configuration | Config 1 | | TDDConf.3.1 |
| | Config 2 | | TDDConf.3.1 |
| DL initial BWP configuration | Config 1, 2 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1, 2 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1, 2 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1, 2 | | ULBWP.1.1 |
| RMC CORESET Reference Channel | Config 1 | | CCR.3.1 TDD CCR.3.3 TDD |
| | Config 2 | | CCR.3.1 TDD CCR.3.3 TDD |
| SSB Configuration | Config 1 | | SSB.1 FR2 |
| | Config 2 | | SSB.1 FR2 |
| SMTc Configuration | Config 1 | | SMTc.1 |
| | Config 2 | | SMTc.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1 | | 120 KHz |
| | Config 2 | | 120 KHz |
| CSI-RS for RLM | Config 1, 2 | | Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD |
| OCNG parameters | | | OP.1 |
| TRS configuration | | | TRS.2.1 TDD TRS.2.2 TDD |
| TCI configuration for PDCCH#1/PDSCH | | | TCI.State.2 |
| TCI configuration for PDCCH#2 | | | TCI.State.3 |
| CP length | | | Normal |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 4 |

| | | | |
|---|---|----------------|-----------------|
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| In sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 4 |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| | DRX | | <i>OFF</i> |
| Gap pattern ID | | N.A. | |
| Layer 3 filtering | | <i>Enabled</i> | |
| T310 timer | ms | 1000 | |
| T311 timer | ms | 1000 | |
| N310 | | 1 | |
| N311 | | 1 | |
| CSI-RS for CSI reporting | Config 1 | | CSI-RS.3.1 TDD |
| | Config 2 | | CSI-RS.3.1 TDD |
| T1 | s | 0.2 | |
| T2 | s | 0.2 | |
| T3 | s | 0.24 | |
| T4 | s | 0.2 | |
| T5 | s | 0.88 | |
| D1 | s | 0.84 | |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | |
| Note 2: E-UTRAN is in non-DRX mode under test. | | | |

Table A.5.5.1.6.1-3: Cell specific test parameters for FR2 for CSI-RS in-sync radio link monitoring in non-DRX mode

| Parameter | | Unit | Test 1 | | | | | | | | | |
|-----------------------------------|---|-----------|---------------------------|----|-----|------|----|-----------------|-----|-----|-----|-----|
| | | | T1 | T2 | T3 | T4 | T5 | T1 | T2 | T3 | T4 | T5 |
| AoA setup | | | Setup 3 defined in A.3.15 | | | | | | | | | |
| | | | AoA1 | | | | | AoA2 | | | | |
| PDCCH_beta | | dB | 4 | | | | | Not sent | | | | |
| PDCCH_DMRS_beta | | dB | 4 | | | | | | | | | |
| PBCH_beta | | dB | 0 | | | | | | | | | |
| PSS_beta | | dB | | | | | | | | | | |
| SSS_beta | | dB | | | | | | | | | | |
| PDSCH_beta | | dB | | | | | | | | | | |
| OCNG_beta | | dB | | | | | | | | | | |
| SNR on RLM-RS1 | Config 1, 2 | dB | 2 | -6 | -15 | -4.5 | 2 | | | | | |
| SNR on RLM-RS2 | Config 1, 2 | | Not sent | | | | | 2 | -14 | -15 | -15 | -14 |
| SNR on other channels and signals | Config 1, 2 | dB | 2 | | | | | N/A | | | | |
| N_{oc} | Config 1, 2 | dBm/15KHz | TBD | | | | | TBD | | | | |
| Propagation condition | | | TDL-A 30ns 75Hz | | | | | TDL-A 30ns 75Hz | | | | |
| Note 1: | OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | | | | | | |
| Note 2: | The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | | | | | | | |
| Note 3: | NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | | | | | | | |
| Note 4: | Measurement gap configuration is assigned to the UE prior to the start of time period T1. | | | | | | | | | | | |
| Note 5: | The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. | | | | | | | | | | | |
| Note 6: | The signal contains PDCCH for UEs other than the device under test as part of OCNG. | | | | | | | | | | | |
| Note 7: | SNR levels correspond to the signal to noise ratio over the SSS REs. | | | | | | | | | | | |
| Note 8: | The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.5.5.1.6.1-1. | | | | | | | | | | | |
| Note 9: | The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6. | | | | | | | | | | | |

Table A.5.5.1.6.1-3A: Void**Table A.5.5.1.6.1-4: Void**

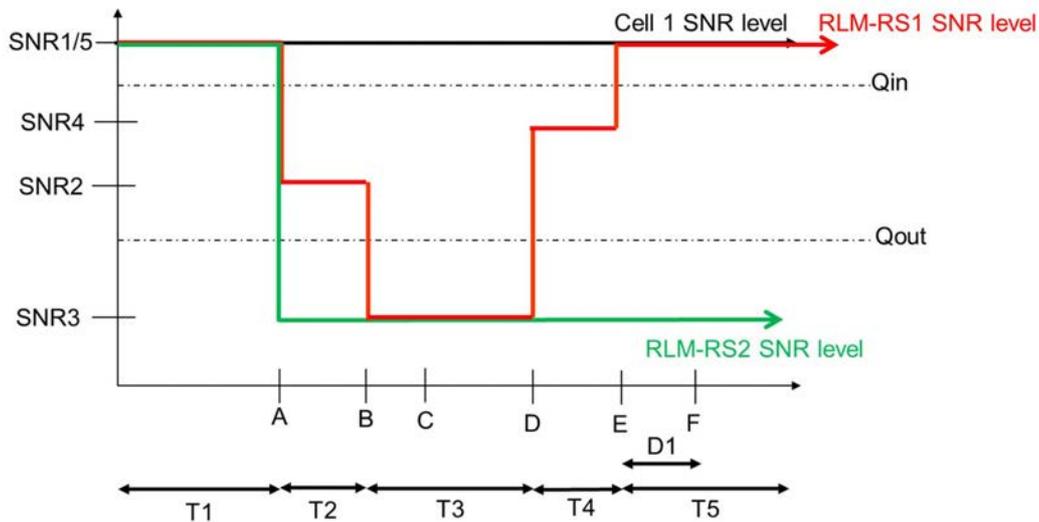


Figure A.5.5.1.6.1-1: SNR variation for CSI-RS in-sync testing

A.5.5.1.6.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.1.7 EN-DC Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with CSI-RS-based RLM in DRX mode

A.5.5.1.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when no DRX is used. This test will partly verify the FR2 TDD PSCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.5.5.1.7.1-1, A.5.5.1.7.1-2, and A.5.5.1.7.1-3 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.5.5.1.7.1-1 shows the variation of the downlink SNR in the E-UTRAN PCell and the PSCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test. In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.5.5.1.7.1-1: Supported test configurations for FR2 PSCell

| Configuration | Description |
|--|---|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to pass in one of the supported test configurations in FR2 | |

Table A.5.5.1.7.1-2: General test parameters for FR2 PSCell for CSI-RS out-of-sync testing in DRX mode

| Parameter | Unit | Value |
|------------------|-------------|---------------|
| | | Test 1 |
| | | |

| | | | |
|-------------------------------------|---|-----|--|
| Active E-UTRA PCell | | | Cell 1 |
| E-UTRA RF Channel Number | | | 1 |
| Active PSCell | | | Cell 2 |
| RF Channel Number | | | 2 |
| Duplex Mode | | | TDD |
| TDD Configuration | Config 1 | | TDDConf.3.1 |
| | Config 2 | | TDDConf.3.1 |
| DL initial BWP configuration | Config 1, 2 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1, 2 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1, 2 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1, 2 | | ULBWP.1.1 |
| RMC CORESET Reference Channel | Config 1 | | CCR. 3.1 TDD CCR.3.3 TDD |
| | Config 2 | | CCR. 3.1 TDD CCR.3.3 TDD |
| SSB Configuration | Config 1 | | SSB.1 FR2 |
| | Config 2 | | SSB.1 FR2 |
| SMTC Configuration | Config 1 | | SMTC.1 |
| | Config 2 | | SMTC.1 |
| PDSCH/PDCCH H subcarrier spacing | Config 1 | | 120 KHz |
| | Config 2 | | 120 KHz |
| CSI-RS for RLM | Config 1, 2 | | Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD |
| TRS configuration | | | TRS.2.1 TDD TRS.2.2 TDD |
| TCI configuration for PDCCH#1/PDSCH | | | TCI.State.2 |
| TCI configuration for PDCCH#2 | | | TCI.State.3 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| REG bundle size | | | 6 |
| DRX | | | DRX.3 |
| Gap pattern ID | | | N.A. |
| Layer 3 filtering | | | <i>Enabled</i> |
| T310 timer | ms | | 0 |
| T311 timer | ms | | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |

| | | | |
|---|----------|---|----------------|
| CSI-RS for CSI reporting | Config 1 | | CSI-RS.3.1 TDD |
| | Config 2 | | CSI-RS.3.1 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 1.28 |
| T3 | | s | 1.28 |
| D1 | | s | 1.24 |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | |
| Note 2: E-UTRAN is in non-DRX mode under test. | | | |

Table A.5.5.1.7.1-3: Cell specific test parameters for FR2 for CSI-RS out-of-sync radio link monitoring in DRX mode

| Parameter | | Unit | Test 1 | | |
|---|-------------|-----------|---------------------------|-----|-----|
| | | | T1 | T2 | T3 |
| AoA setup | | | Setup 1 defined in A.3.15 | | |
| PDCCH_beta | | dB | 4 | | |
| PDCCH_DMRS_beta | | dB | 4 | | |
| PBCH_beta | | dB | 0 | | |
| PSS_beta | | dB | | | |
| SSS_beta | | dB | | | |
| PDSCH_beta | | dB | | | |
| OCNG_beta | | dB | | | |
| SNR on RLM-RS1 | Config 1, 2 | dB | 2 | -6 | -15 |
| SNR on RLM-RS2 | Config 1, 2 | | 2 | -14 | -15 |
| SNR on other channels and signals | Config 1, 2 | dB | 2 | | |
| N_{oc} | Config 1 | dBm/15KHz | -104.7 | | |
| | Config 2 | | -104.7 | | |
| Propagation condition | | | DL-A 30ns 75Hz | | |
| Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | |
| Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | |
| Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | |
| Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1. | | | | | |
| Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. | | | | | |
| Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG. | | | | | |
| Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs. | | | | | |
| Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.1.7.1-1. | | | | | |
| Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6. | | | | | |

Table A.5.5.1.7.1-3A: Void

Table A.5.5.1.7.1-4: Void

Table A.5.5.1.7.1-5: Void

Table A.5.5.1.7.1-6: Void

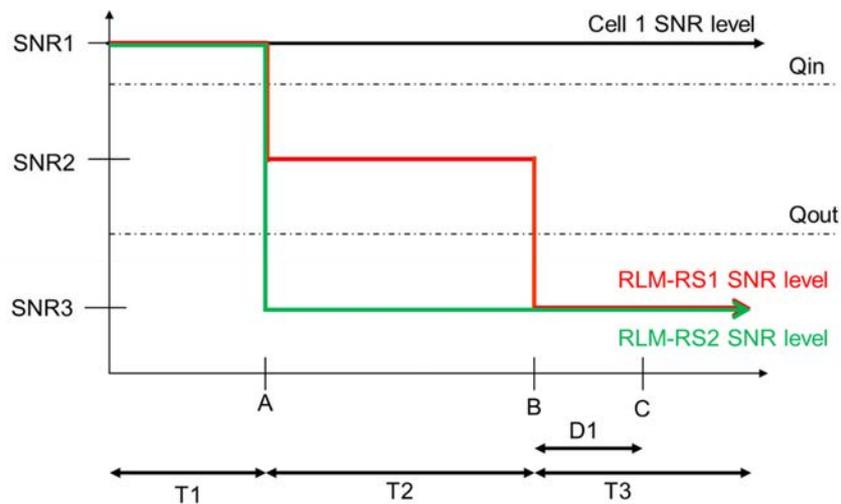


Figure A.5.5.1.7.1-1: SNR variation for CSI-RS out-of-sync testing

A.5.5.1.7.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 (PSCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

The UE shall stop transmitting uplink signal in Cell 2 (PSCell) no later than time point C (D_1 after the start of the time duration T3) on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.1.8 EN-DC Radio Link Monitoring In-sync Test for FR2 PSCell configured with CSI-RS-based RLM in DRX mode

A.5.5.1.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when no DRX is used. This test will partly verify the FR2 TDD PSCell CSI-RS In-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.5.5.1.8.1-1, A.5.5.1.8.1-2, A.5.5.1.8.1-3 and A.5.5.1.8.1-3A below. There are two cells, cell 1 which is the E-UTRAN PCell, and cell 2 is the NR PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.1.8.1-1 shows the variation of the downlink SNR in the PSCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms).

Table A.5.5.1.8.1-1: Supported test configurations for FR2 PSCell

| Configuration | Description |
|--|---|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to pass in one of the supported test configurations in FR2 | |

Table A.5.5.1.8.1-2: General test parameters for FR2 PSCell for CSI-RS in-sync testing in non-DRX mode

| Parameter | | Unit | Value |
|-------------------------------------|-------------|------|--|
| | | | Test 1 |
| Active E-UTRA PCell | | | Cell 1 |
| E-UTRA RF Channel Number | | | 1 |
| Active PSCell | | | Cell 2 |
| RF Channel Number | | | 2 |
| Duplex Mode | | | TDD |
| TDD Configuration | Config 1 | | TDDConf.3.1 |
| | Config 2 | | TDDConf.3.1 |
| DL initial BWP configuration | Config 1, 2 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1, 2 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1, 2 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1, 2 | | ULBWP.1.1 |
| RMCCORES ET Reference Channel | Config 1 | | CCR.3.1 TDD CCR.3.3 TDD |
| | Config 2 | | CCR.3.1 TDD CCR.3.3 TDD |
| SSB Configuration | Config 1 | | SSB.1 FR2 |
| | Config 2 | | SSB.1 FR2 |
| SMTC Configuration | Config 1 | | SMTC.1 |
| | Config 2 | | SMTC.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1 | | 120 KHz |
| | Config 2 | | 120 KHz |
| CSI-RS for RLM | Config 1, 2 | | Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD |
| TRS configuration | | | TRS.2.1 TDD TRS.2.2 TDD |
| TCI configuration for PDCCH#1/PDSCH | | | TCI.State.2 |
| TCI configuration for PDCCH#2 | | | TCI.State.3 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| | DCI format | | 1-0 |

| | | | |
|---|---|----------------|-----------------|
| Out of sync transmission parameters | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| In sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 4 |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| DRX | | DRX.3 | |
| Gap pattern ID | | <i>gp0</i> | |
| Layer 3 filtering | | <i>Enabled</i> | |
| T310 timer | ms | 2000 | |
| T311 timer | ms | 1000 | |
| N310 | | 1 | |
| N311 | | 1 | |
| CSI-RS for CSI reporting | Config 1 | | CSI-RS.3.1 TDD |
| | Config 2 | | CSI-RS.3.1 TDD |
| T1 | s | 0.2 | |
| T2 | s | 0.2 | |
| T3 | s | 1.64 | |
| T4 | s | 0.2 | |
| T5 | s | 1.88 | |
| D1 | s | 1.84 | |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | |
| Note 2: E-UTRAN is in non-DRX mode under test. | | | |

Table A.5.5.1.8.1-3: Cell specific test parameters for FR2 for CSI-RS in-sync radio link monitoring in DRX mode

| Parameter | | Unit | Test 1 | | | | |
|--|-------------|-----------|---------------------------|-----|-----|------|-----|
| | | | T1 | T2 | T3 | T4 | T5 |
| AoA setup | | | Setup 1 defined in A.3.15 | | | | |
| PDCCH_beta | | dB | 4 | | | | |
| PDCCH_DMRS_beta | | dB | 4 | | | | |
| PBCH_beta | | dB | 0 | | | | |
| PSS_beta | | dB | | | | | |
| SSS_beta | | dB | | | | | |
| PDSCH_beta | | dB | | | | | |
| OCNG_beta | | dB | | | | | |
| SNR on RLM-RS1 | Config 1, 2 | dB | 2 | -6 | -15 | -4.5 | 2 |
| SNR on RLM-RS2 | Config 1, 2 | dB | 2 | -14 | -15 | -15 | -14 |
| SNR on other channels and signals | Config 1, 2 | dB | 2 | | | | |
| N_{oc} | Config 1, 2 | dBm/15KHz | -104.7 | | | | |
| Propagation condition | | | [TDL-A 30ns 75Hz] | | | | |
| <p>Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.</p> <p>Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.</p> <p>Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.</p> <p>Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.</p> <p>Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.</p> <p>Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.</p> <p>Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.5.5.1.8.1-1.</p> <p>Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.</p> | | | | | | | |

Table A.5.5.1.8.1-3A: Measurement gap configuration for FR2 CSI-RS in-sync radio link monitoring in DRX mode

| Field | Test 1 |
|---|--------|
| | Value |
| gapOffset | 0 |
| <p>Note 1: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned. (Ensure that RLM RS is partially overlapped with measurement gap)</p> | |

Table A.5.5.1.8.1-4: Void

Table A.5.5.1.8.1-5: Void

Table A.5.5.1.8.1-6: Void

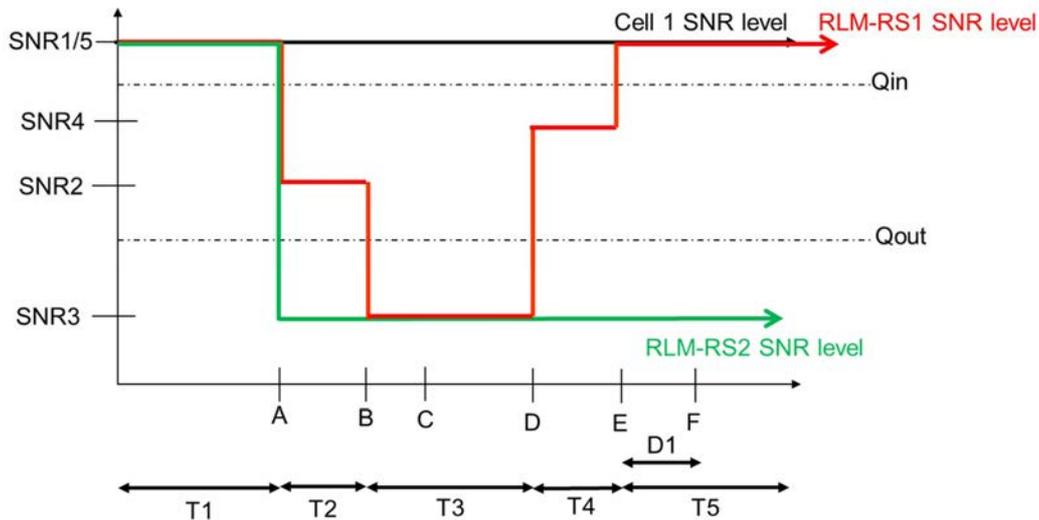


Figure A.5.5.1.8.1-1: SNR variation for CSI-RS in-sync testing

A.5.5.1.8.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.1.9 EN-DC Radio Link Monitoring UE Scheduling Restrictions on FR2

A.5.5.1.9.1 Test Purpose and Environment

The purpose is to verify that the NR UE correctly follows the RLM scheduling restrictions requirements defined in clause 8.1.7. This test verifies that the UE correctly receive the PDCCH scheduled on the symbols right before the RLM SSB symbols without overlap so that it sends ACK/NACK correctly. The test case is only applicable to UE which supports `pdccch-MonitoringAnyOccasions` or `pdccch-MonitoringAnyOccasionsWithSpanGap`.

Two cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and NR FR2 PSCell (Cell 2). The test parameters for NR PSCell are given in table A.5.5.1.9.1-1, table A.5.5.1.9.1-2 and table A.5.5.1.9.1-3 below and the parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. The UE is required during time period T1 to transmit ACK/NACK correctly upon scheduling of PDSCH.

Table A.5.5.1.9.1-1: Supported test configurations

| Configuration | Description |
|---|---|
| 1 | FDD LTE, 120 kHz SSB SCS, 120 kHz RMC SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | TDD LTE, 120 kHz SSB SCS, 120 kHz RMC SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations. | |

Table A.5.5.1.9.1-2: General test parameters for RLM scheduling restriction test case in FR2

| Parameter | Unit | Test configuration | Value | Comment |
|--------------------|------|--------------------|----------------|---|
| RF Channel Number | | 1, 2 | 1 and 2 | 1 for NR PSCell and 2 for LTE PCell |
| SSB configuration | | 1, 2 | SSB.1 FR2 | |
| SMTC configuration | | 1, 2 | SMTC pattern 1 | |
| DRX cycle length | s | 1, 2 | OFF | |
| T1 | s | 1, 2 | 5 | During T1 the UE is required to correctly transmit ACK/NACK |

Table A.5.5.1.9.1-3: Cell specific test parameters for RLM scheduling restriction test case in FR2

| Parameter | Unit | Test configuration | Cell 2 | |
|-------------------------------------|---------------|--------------------|-----------------------------|------------------|
| | | | AoA1 | AoA2 |
| AoA setup | | 1, 2 | Setup 3 defined in A.3.15.3 | |
| TDD configuration | | 1, 2 | TDDConf.3.1 | |
| PDSCH RMC configuration | | 1, 2 | SR.3.1 TDD | Not sent |
| RMSI CORESET RMC configuration | | 1, 2 | CR.3.1 | Not sent |
| Dedicated CORESET RMC configuration | | 1, 2 | CCR.3.2 | Not sent |
| TRS configuration | | 1, 2 | TRS.2.1 TDD | TRS.2.2 TDD |
| PDCCH/PDSCH TCI state | | 1, 2 | TCI.State.2 | Not sent |
| OCNG Pattern | | 1, 2 | OP.1 defined in A.3.2.1 | Not sent |
| Initial DL BWP configuration | | 1, 2 | DLBWP.0.1 | |
| Initial UL BWP configuration | | 1, 2 | ULBWP.0.1 | |
| RLM-RS | | 1, 2 | SSB with index 0 | SSB with index 1 |
| \hat{E}_s / I_{ot} | dB | 1, 2 | 3 | N/A |
| N_{oc} ^{Note2} | dBm/SCS | 1, 2 | -84.9 | Not sent |
| \hat{E}_s / N_{oc} | dB | 1, 2 | 3 | N/A |
| SS-RSRP ^{Note3} | dBm/SCS | 1, 2 | -81.9 | -81.9 |
| Io | dBm/95.04 MHz | 1, 2 | -51.15 | -52.91 |
| Propagation Condition | | 1, 2 | AWGN | - |

A.5.5.1.9.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.1.7.3.

A.5.5.2 Interruption

A.5.5.2.1 E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

A.5.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that when E-UTRA PCell is in DRX and NR PSCell is in non-DRX, NR PSCell interruptions due to transitions from active to non-active and from non-active to active during LTE PCell DRX the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for NR PSCell in EN-DC specified in clause 8. 2.1.2. Supported test configurations are shown in table A.5.5.2.1.1-1.

The general test parameters are given in Table A.5.5.2.1.1-2, and NR cell specific test parameters are given in Table A.5.5.2.1.1-3 and A.5.5.2.1.1-4. The E-UTRAN PCell DRX configuration parameters are given in Table A.5.5.2.1.1-5 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.2-1. In the test there

are two cells: Cell1 and Cell2. Cell1 is LTE PCell on and Cell2 is NR FR2 PSCell. The test consists of one time period, with duration of T1. During T1, NR PSCell is continuously scheduled in DL while LTE PCell is not scheduled and has DRX configured. Prior to the start of the time duration T1, Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. Prior to start of T1 the DRX inactivity timer for the LTE PCell has already expired. During T1 the UE shall be continuously scheduled on NR PSCell while not scheduled on LTE PCell. PDCCH indicating a new transmission on PSCell shall be sent continuously during the entire time duration to ensure UE would not enter DRX state on PSCell.

Table A.5.5.2.1.1-1: Interruption at transitions between active and non-active during DRX supported test configurations

| Config | Description |
|--------|--|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.5.5.2.1.1-2: General test parameters for E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

| Parameter | Unit | Value | Comment |
|----------------------------|------|--------|--|
| RF Channel Number | | 1, 2 | One is E-UTRAN RF channel and the other is NR RF channel |
| Active PCell | | Cell1 | PCell on E-UTRAN RF channel number 1. |
| Configured PSCell | | Cell2 | PSCell on NR RF channel number 2. |
| CP length | | Normal | Applicable to cell1 and cell 2 |
| DRX | | DRX.4 | DRX related parameters are defined in Table A.3.3.4-1 |
| Measurement gap pattern Id | | OFF | |
| T1 | s | 10 | |

Table A.5.5.2.1.1-3: NR cell specific test parameters for E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

| Parameter | | Unit | Cell 2 |
|--|------------|---------|-----------------------------|
| Frequency Range | | | FR2 |
| Duplex mode | Config 1,2 | | TDD |
| TDD configuration | Config 1,2 | | TDDConf.3.1 |
| BW _{channel} | Config 1,2 | MHz | 100: N _{RB,c} = 66 |
| Downlink initial BWP Configuration | Config 1,2 | | DLBWP.0.1 |
| Downlink dedicated BWP Configuration | Config 1,2 | | DLBWP.1.1 |
| Uplink initial BWP configuration | Config 1,2 | | ULBWP.0.1 |
| Uplink dedicated BWP configuration | Config 1,2 | | ULBWP.1.1 |
| TRS configuration | Config 1,2 | | TRS.2.1 TDD |
| TCI state | Config 1,2 | | TCI.State.0 |
| PDSCH Reference measurement channel | Config 1,2 | | SR.3.1 TDD |
| RMSI CORESET Reference Channel | Config 1,2 | | CR.3.1 TDD |
| RMC CORESET Reference Channel | Config 1,2 | | CCR.3.1 TDD |
| OCNG Patterns | | | OP.1 |
| SSB Configuration | | | SSB.1 FR2 |
| SMTTC Configuration | Config 1,2 | | SMTTC.1 |
| EPRE ratio of PSS to SSS | | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | |
| \bar{E}_s/N_{oc} | | dB | 17 |
| Propagation Condition | | | AWGN |
| Time offset to cell1 ^{Note 2} | | μ s | 3 |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |
| Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells | | | |

Table A.5.5.2.1.1-4: NR cell specific OTA related test parameters for E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

| Parameter | Unit | Cell2 |
|--------------------------------|--|--------------------------------------|
| Angle of arrival configuration | | Setup 1 according to clause A.3.15.1 |
| N_{oc}^{Note1} | dBm/15kHz ^{Note4} | -112 |
| N_{oc}^{Note1} | dBm/SCS ^{Note3} | -102.97 |
| \hat{E}_s / N_{oc} | dB | 17 |
| SS-RSRP ^{Note2} | dBm/SCS ^{Note4} | -85.97 |
| \hat{E}_s / I_{ot} | dB | 17 |
| I_o^{Note2} | dBm/95.04 MHz ^{Note4} | -56.90 |
| Note 1: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | |
| Note 2: | SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | |
| Note 3: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | |
| Note 4: | Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone | |
| Note 5: | As observed with 0dBi gain antenna at the centre of the quiet zone | |

Table A.5.5.2.1.1-5: Void

A.5.5.2.1.2 Test Requirements

The UE shall be continuously scheduled in NR PSCell during the entire length of T1. UE shall not be scheduled in LTE PCell during T1. During the time duration T1 the UE shall transmit at least 99% of ACK/NACK on NR PSCell.

Interruption on NR PSCell shall not exceed 0.625ms (5 slots) as defined in clause 8. 2.1.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.2.2 E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

A.5.5.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that when LTE PCell is in DRX and NR PSCell is in non-DRX, NR PSCell interruptions due to transitions from active to non-active and from non-active to active during LTE PCell DRX the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for NR PSCell in EN-DC specified in clause 8. 2.1.2. Supported test configurations are shown in table A.5.5.2.2.1-1.

The general test parameters are given in Table A.5.5.2.2.1-2, and NR cell specific test parameters are given in Table A.5.5.2.2.1-3 and A.5.5.2.2.1-4. The E-UTRAN PCell DRX configuration parameters are given in Table A.5.5.2.2.1-5 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.2-1. In the test there are two cells: Cell1 and Cell2. Cell1 is LTE PCell and Cell2 is NR PSCell. The test consists of one time period, with duration of T1. During T1, NR PSCell is continuously scheduled in DL while LTE PCell is not scheduled and has DRX configured. Prior to the start of the time duration T1, Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. Prior to start of T1 the DRX inactivity timer for the LTE PCell has already expired. During T1 the UE shall be continuously scheduled on NR PSCell while not scheduled on LTE PCell. PDCCCH

indicating a new transmission on PSCell shall be sent continuously during the entire time duration to ensure UE would not enter DRX state on PSCell.

Table A.5.5.2.2.1-1: Interruption at transitions between active and non-active during DRX supported test configurations

| Config | Description |
|--|---|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations | |

Table A.5.5.2.2.1-2: General test parameters for E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

| Parameter | Unit | Value | Comment |
|----------------------------|------|--------|--|
| RF Channel Number | | 1, 2 | One is E-UTRAN RF channel and the other is NR RF channel |
| Active PCell | | Cell1 | PCell on E-UTRAN RF channel number 1. |
| Configured PSCell | | Cell2 | PSCell on NR RF channel number 2. |
| CP length | | Normal | Applicable to cell1 and cell 2 |
| DRX | | DRX.6 | DRX related parameters are defined in Table A.3.3.6-1 |
| Measurement gap pattern Id | | OFF | |
| T1 | s | 10 | |

Table A.5.5.2.1-3: NR cell specific test parameters for E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

| Parameter | | Unit | Cell 2 |
|--|------------|------|----------------------|
| Frequency Range | | | FR2 |
| Duplex mode | Config 1,2 | | TDD |
| TDD configuration | Config 1,2 | | TDDConf.3.1 |
| BW_{channel} | Config 1,2 | MHz | 100: $N_{RB,c} = 66$ |
| Downlink initial BWP Configuration | Config 1,2 | | DLBWP.0.1 |
| Downlink dedicated BWP Configuration | Config 1,2 | | DLBWP.1.1 |
| Uplink initial BWP configuration | Config 1,2 | | ULBWP.0.1 |
| Uplink dedicated BWP configuration | Config 1,2 | | ULBWP.1.1 |
| TRS configuration | Config 1,2 | | TRS.2.1 TDD |
| TCI state | Config 1,2 | | TCI.State.0 |
| PDSCH Reference measurement channel | Config 1,2 | | SR.3.1 TDD |
| RMSI CORESET Reference Channel | Config 1,2 | | CR.3.1 TDD |
| RMC CORESET Reference Channel | Config 1,2 | | CCR.3.1 TDD |
| OCNG Patterns | | | OP.1 |
| SSB Configuration | | | SSB.1 FR2 |
| SMTTC Configuration | Config 1,2 | | SMTTC.1 |
| EPRE ratio of PSS to SSS | | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | |
| \bar{E}_s/N_{oc} | | dB | 17 |
| Propagation Condition | | | AWGN |
| Time offset to cell1 ^{Note 2} | | ms | 3 |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |
| Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells | | | |

Table A.5.5.2.1-4: NR cell specific OTA related test parameters for E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

| Parameter | Unit | Cell2 |
|--------------------------------|--|--------------------------------------|
| Angle of arrival configuration | | Setup 1 according to clause A.3.15.1 |
| N_{oc}^{Note1} | dBm/15kHz ^{Note4} | -112 |
| N_{oc}^{Note1} | dBm/SCS ^{Note3} | -102.97 |
| \hat{E}_s / N_{oc} | dB | 17 |
| SS-RSRP ^{Note2} | dBm/SCS ^{Note4} | -85.97 |
| \hat{E}_s / I_{ot} | dB | 17 |
| I_o^{Note2} | dBm/95.04 MHz ^{Note4} | -56.90 |
| Note 1: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | |
| Note 2: | SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | |
| Note 3: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | |
| Note 4: | Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone | |
| Note 5: | As observed with 0dBi gain antenna at the centre of the quiet zone | |

Table A.5.5.2.2.1-5: Void

A.5.5.2.2.2 Test Requirements

The UE shall be continuously scheduled in NR PSCell during the entire length of T1. UE shall not be scheduled in LTE PCell during T1. During the time duration T1 the UE shall transmit at least 99% of ACK/NACK on NR PSCell.

Interruption on NR PSCell shall not exceed 0.625ms (5 slots) as defined in clause 8. 2.1.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.2.3 E-UTRAN – NR FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC

A.5.5.2.3.1 Test Purpose and Environment

The purpose of this test is to verify E-UTRAN PCell and NR PSCell interruptions during the measurement on the deactivated NR SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for E-UTRAN PCell and NR PSCell in EN-DC specified in clause 8. 2.1.2. Supported test configurations are shown in table A.5.5.2.3.1-1.

The general test parameters are given in Table A.5.5.2.3.1-2, and NR cell specific test parameters are given in Table A.5.5.2.3.1-3 and A.5.5.2.3.1-4 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-2. In the test there are three cells: Cell1 Cell2 and Cell3. Cell1 is LTE PCell, Cell2 and Cell 3 is NR FR2 PSCell and NR FR2 deactivated SCell. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. The point in time at which the RRC message including *measCycleSCell* for the deactivated NR SCells is received by the UE, defines the start of time period T1. During T1, LTE PCell and NR PSCell are continuously scheduled in DL.

Table A.5.5.2.3.1-1: Interruption during measurements on deactivated NR SCC supported test configurations

| Config | Description |
|--|---|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations | |

Table A.5.5.2.3.1-2: General test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC

| Parameter | Unit | Value | Comment |
|--|------|---------|--|
| RF Channel Number | | 1, 2, 3 | One is E-UTRAN RF channel and the other two are NR RF channels |
| Active PCell | | Cell1 | PCell on E-UTRAN RF channel number 1. |
| Configured PSCell | | Cell2 | PSCell on NR RF channel number 2. |
| Configured deactivated SCell | | Cell3 | Deactivated SCell on NR RF channel number 3. |
| CP length | | Normal | Applicable to cell1, cell 2 and cell3 |
| AoA number | | 1 | Applicable to cell2 and cell3 |
| DRX | | OFF | |
| Measurement gap pattern Id | | OFF | |
| SCell measurement cycle (measCycleSCell) | ms | 640 | |

Table A.5.5.2.3.1-3: NR cell specific test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC

| Parameter | | Unit | Cell 2 | Cell 3 |
|--|------------|---------|----------------------|----------------------|
| Frequency Range | | | FR2 | FR2 |
| | | | | |
| Duplex mode | Config 1,2 | | TDD | TDD |
| | | | | |
| TDD configuration | Config 1,2 | | TDDConf.3.1 | TDDConf.3.1 |
| $BW_{channel}$ | Config 1,2 | MHz | 100: $N_{RB,c} = 66$ | 100: $N_{RB,c} = 66$ |
| Downlink initial BWP Configuration | Config 1,2 | | DLBWP.0.1 | DLBWP.0.1 |
| Downlink dedicated BWP Configuration | Config 1,2 | | DLBWP.1.1 | DLBWP.1.1 |
| Uplink initial BWP configuration | Config 1,2 | | ULBWP.0.1 | ULBWP.0.1 |
| Uplink dedicated BWP configuration | Config 1,2 | | ULBWP.1.1 | ULBWP.1.1 |
| PDSCH Reference measurement channel | Config 1,2 | | SR.3.1 TDD | - |
| RMSI CORESET Reference Channel | Config 1,2 | | CR.3.1 TDD | CR.3.1 TDD |
| PDCCH CORESET parameters | Config 1,2 | | CCR 3.1 TDD | CCR 3.1 TDD |
| OCNG Patterns | | | OP.1 | OP.1 |
| SSB Configuration | Config 1,2 | | SSB.1 FR2 | SSB.1 FR2 |
| SMTC Configuration | Config 1,2 | | SMTC.1 | SMTC.1 |
| TRS configuration | Config 1,2 | | TRS.2.1 TDD | TRS.2.1 TDD |
| TCI state | Config 1,2 | | TCI.State.0 | TCI.State.0 |
| EPRE ratio of PSS to SSS | | dB | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | |
| Propagation Condition | | | AWGN | AWGN |
| Time offset to cell1 ^{Note 2} | | μ s | 3 | 3 |
| Time offset to cell1 ^{Note 3} | | μ s | - | 3 |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | |
| Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells | | | | |
| Note 3: Receive time difference of signals received between slot timing boundary from two NR Cells including time alignment error between the two cells | | | | |

Table A.5.5.2.3.1-4: NR cell specific OTA related test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC

| Parameter | | Unit | Cell 2 | Cell 3 |
|--------------------------------|--------------|-----------|------------------------------------|--------|
| Angle of arrival configuration | | | Setup 1 defined in clause A.3.15.1 | |
| N_{oc} ^{Note1} | NR_TDD_FR2_A | dBm/15kHz | -112 | -105 |
| | NR_TDD_FR2_B | | | |
| | NR_TDD_FR2_F | | | |

| | | | | |
|---|--------------|-----------------------------------|-------|-------|
| | NR_TDD_FR2_G | | | |
| | NR_TDD_FR2_T | | | |
| | NR_TDD_FR2_Y | | | |
| N_{oc} ^{Note1} | NR_TDD_FR2_A | dBm/SCS ^{Note3} | -103 | -96 |
| | NR_TDD_FR2_B | | | |
| | NR_TDD_FR2_F | | | |
| | NR_TDD_FR2_G | | | |
| | NR_TDD_FR2_T | | | |
| | NR_TDD_FR2_Y | | | |
| SS-RSRP ^{Note2} | NR_TDD_FR2_A | dBm/SCS ^{Note4} | -86 | -86 |
| | NR_TDD_FR2_B | | | |
| | NR_TDD_FR2_F | | | |
| | NR_TDD_FR2_G | | | |
| | NR_TDD_FR2_T | | | |
| | NR_TDD_FR2_Y | | | |
| \hat{E}_s/I_{ot} | NR_TDD_FR2_A | dB | 17 | 10 |
| | NR_TDD_FR2_B | | | |
| | NR_TDD_FR2_F | | | |
| | NR_TDD_FR2_G | | | |
| | NR_TDD_FR2_T | | | |
| | NR_TDD_FR2_Y | | | |
| \hat{E}_s/N_{oc} | NR_TDD_FR2_A | dB | 17 | 10 |
| | NR_TDD_FR2_B | | | |
| | NR_TDD_FR2_F | | | |
| | NR_TDD_FR2_G | | | |
| | NR_TDD_FR2_T | | | |
| | NR_TDD_FR2_Y | | | |
| I_o ^{Note2} | NR_TDD_FR2_A | dBm/95.04 MHz ^{Note4} | -59.4 | -59.4 |
| | NR_TDD_FR2_B | | | |
| | NR_TDD_FR2_F | | | |
| | NR_TDD_FR2_G | | | |
| | NR_TDD_FR2_T | | | |
| | NR_TDD_FR2_Y | | | |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone</p> | | | | |

A.5.5.2.3.2 Test Requirements

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table A.5.5.2.3.2-1 and Table A.5.5.2.3.2-2.

Table A.5.5.2.3.2-1: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

| μ | NR Slot length (ms) | Interruption length (slot) |
|-------|---------------------|----------------------------|
| 3 | 0.125 | 4 |

Table A.5.5.2.3.2-2: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

| μ | NR Slot length (ms) | Interruption length (slot) |
|-------|---------------------|----------------------------|
| 3 | 0.125 | 4 + SMTC duration |

Each interruption on E-UTRAN PCell shall not exceed 1 subframe for synchronous interband EN-DC.

Each interruption on E-UTRAN PCell shall not exceed 1 subframe.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.2.4 E-UTRAN – NR FR2 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

A.5.5.2.4.1 Test Purpose and Environment

The purpose of this test is to verify E-UTRAN PCell and NR PSCell interruptions during the measurement on the deactivated NR SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for E-UTRAN PCell and NR PSCell in EN-DC specified in clause 8. 2.1.2. Supported test configurations are shown in table A.5.5.2.4.1-1.

The general test parameters are given in Table A.5.5.2.4.1-2, and NR cell specific test parameters are given in Table A.5.5.2.4.1-3 and A.5.5.2.4.1-4 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-2. In the test there are three cells: Cell1 Cell2 and Cell3. Cell1 is LTE PCell, Cell2 and Cell 3 is NR FR2 PSCell and NR FR2 deactivated SCell. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. The point in time at which the RRC message including *measCycleSCell* for the deactivated NR SCCells is received by the UE, defines the start of time period T1. During T1, LTE PCell and NR PSCell are continuously scheduled in DL.

Table A.5.5.2.4.1-1: Interruption during measurements on deactivated NR SCC supported test configurations

| Config | Description |
|--------|--|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.5.5.2.4.1-2: General test parameters for E-UTRAN – NR interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

| Parameter | Unit | Value | Comment |
|--|------|--------|---|
| RF Channel Number | | 1, 2 | One is E-UTRAN RF channel and the other two are NR RF channel |
| Active PCell | | Cell1 | PCell on E-UTRAN RF channel number 1. |
| Configured PSCell | | Cell2 | PSCell on NR RF channel number 2. |
| Configured deactivated SCell | | Cell3 | Deactivated SCell on NR RF channel number 2. |
| CP length | | Normal | Applicable to cell1, cell 2 and cell3 |
| AoA number | | 1 | Applicable to cell2 and cell3 |
| DRX | | OFF | |
| Measurement gap pattern Id | | OFF | |
| SCell measurement cycle (measCycleSCell) | ms | 640 | |
| T1 | s | 10 | |

Table A.5.5.2.3.1-3: NR cell specific test parameters for E-UTRAN – NR interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

| Parameter | | Unit | Cell 2 | Cell 3 |
|--|--|------------|-------------|----------------------|
| Frequency Range | | | FR2 | FR2 |
| Duplex mode | | Config 1,2 | TDD | TDD |
| TDD configuration | | Config 1,2 | TDDConf.3.1 | TDDConf.3.1 |
| $BW_{channel}$ | | Config 1,2 | MHz | 100: $N_{RB,c} = 66$ |
| Downlink initial BWP Configuration | | Config 1,2 | DLBWP.0.1 | |
| Downlink dedicated BWP Configuration | | Config 1,2 | DLBWP.1.1 | |
| Uplink initial BWP configuration | | Config 1,2 | ULBWP.0.1 | |
| Uplink dedicated BWP configuration | | Config 1,2 | ULBWP.1.1 | |
| PDSCH Reference measurement channel | | Config 1,2 | SR.3.1 TDD | - |
| RMSI CORESET Reference Channel | | Config 1,2 | CR.3.1 TDD | CR.3.1 TDD |
| PDCCH CORESET parameters | | Config 1,2 | CCR.3.1 TDD | CCR.3.1 TDD |
| OCNG Patterns | | | OP.1 | OP.1 |
| SSB Configuration | | | SSB.1 FR2 | SSB.1 FR2 |
| SMTC Configuration | | Config 1,2 | SMTC.1 FR2 | SMTC.1 FR2 |
| TRS configuration | | Config 1,2 | TRS.2.1 TDD | TRS.2.1 TDD |
| TCI state | | Config 1,2 | TCI.State.0 | TCI.State.0 |
| EPRE ratio of PSS to SSS | | dB | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | |
| Propagation Condition | | | AWGN | AWGN |
| Time offset to cell1 ^{Note 2} | | ms | 3 | 3 |
| Time offset to cell1 ^{Note 3} | | μ s | - | 3 |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | |
| Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells | | | | |
| Note 3: Receive time difference of signals received between slot timing boundary from two NR Cells including time alignment error between the two cells | | | | |

Table A.5.5.2.4.1-4: NR cell specific OTA related test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

| Parameter | | Unit | Cell 2 | Cell 3 |
|--------------------------------|--------------|-----------|------------------------------------|--------|
| Angle of arrival configuration | | | Setup 1 defined in clause A.3.15.1 | |
| N_{oc} ^{Note1} | NR_TDD_FR2_A | dBm/15kHz | -112 | -105 |
| | NR_TDD_FR2_B | | | |
| | NR_TDD_FR2_F | | | |

| | | | | |
|---|--------------|-----------------------------------|-------|-------|
| | NR_TDD_FR2_G | | | |
| | NR_TDD_FR2_T | | | |
| | NR_TDD_FR2_Y | | | |
| N_{oc} ^{Note1} | NR_TDD_FR2_A | dBm/SCS ^{Note3} | -103 | -96 |
| | NR_TDD_FR2_B | | | |
| | NR_TDD_FR2_F | | | |
| | NR_TDD_FR2_G | | | |
| | NR_TDD_FR2_T | | | |
| | NR_TDD_FR2_Y | | | |
| SS-RSRP ^{Note2} | NR_TDD_FR2_A | dBm/SCS ^{Note4} | -86 | -86 |
| | NR_TDD_FR2_B | | | |
| | NR_TDD_FR2_F | | | |
| | NR_TDD_FR2_G | | | |
| | NR_TDD_FR2_T | | | |
| | NR_TDD_FR2_Y | | | |
| \hat{E}_s/I_{ot} | | dB | 17 | 10 |
| \hat{E}_s/N_{oc} | | dB | 17 | 10 |
| I_o ^{Note2} | NR_TDD_FR2_A | dBm/95.04 MHz ^{Note4} | -59.4 | -59.4 |
| | NR_TDD_FR2_B | | | |
| | NR_TDD_FR2_F | | | |
| | NR_TDD_FR2_G | | | |
| | NR_TDD_FR2_T | | | |
| | NR_TDD_FR2_Y | | | |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone</p> | | | | |

A.5.5.2.4.2 Test Requirements

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table A.5.5.2.4.2-1 and Table A.5.5.2.4.2-2.

Table A.5.5.2.4.2-1: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

| μ | NR Slot length (ms) | Interruption length (slot) |
|-------|---------------------|----------------------------|
| 3 | 0.125 | 4 |

Table A.5.5.2.4.2-2: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

| μ | NR Slot length (ms) | Interruption length (slot) |
|-------|---------------------|----------------------------|
| 3 | 0.125 | 4 + SMTC duration |

Each interruption on E-UTRAN PCell shall not exceed 1 subframe.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.2.5 E-UTRAN – NR FR2 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

A.5.5.2.5.1 Test Purpose and Environment

The purpose of this test is to verify E-UTRAN PCell and NR PSCell interruptions during the measurement on the deactivated E-UTRAN SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for E-UTRAN PCell and NR PSCell in EN-DC specified in clause 8. 2.1.2. Supported test configurations are shown in table A.5.5.2.5.1-1.

The general test parameters are given in Table A.5.5.2.5.1-2, and NR cell specific test parameters are given in Table A.5.5.2.5.1-3 and A.5.5.2.5.1-4 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-2. In the test there are three cells: Cell1 Cell2 and Cell3. Cell1 and Cell3 is LTE PCell and LTE deactivated SCell, Cell2 is NR FR2 PSCell. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. The point in time at which the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated E-UTRA SCell is received by the UE, defines the start of time period T1. During T1, LTE PCell and NR PSCell are continuously scheduled in DL.

Table A.5.5.2.5.1-1: Interruption during measurements on deactivated E-UTRAN SCC supported test configurations

| Config | Description |
|--------|--|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.5.5.2.5.1-2: General test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

| Parameter | Unit | Value | Comment |
|--|------|---------|--|
| RF Channel Number | | 1, 2, 3 | One is NR RF channel and two are E-UTRAN RF channels |
| Active PCell | | Cell1 | PCell on E-UTRAN RF channel number 1. |
| Configured PSCell | | Cell2 | PSCell on NR RF channel number 2. |
| Configured deactivated SCell | | Cell3 | Deactivated SCell on E-UTRAN RF channel number 3. |
| CP length | | Normal | Applicable to cell1, cell 2 and cell3 |
| DRX | | OFF | |
| Measurement gap pattern Id | | OFF | |
| SCell measurement cycle (measCycleSCell) | ms | 640 | |
| T1 | s | 10 | |

Table A.5.5.2.5.1-3: NR cell specific test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated E_UTRAN SCC in synchronous EN-DC

| Parameter | | Unit | Cell 2 |
|--|------------|------|-----------------------------|
| Frequency Range | | | FR2 |
| Duplex mode | Config 1,2 | | TDD |
| TDD configuration | Config 1,2 | | TDDConf.3.1 |
| BW _{channel} | Config 1,2 | MHz | 100: N _{RB,c} = 66 |
| Downlink initial BWP Configuration | Config 1,2 | | DLBWP.0.1 |
| Downlink dedicated BWP Configuration | Config 1,2 | | DLBWP.1.1 |
| Uplink initial BWP configuration | Config 1,2 | | ULBWP.0.1 |
| Uplink dedicated BWP configuration | Config 1,2 | | ULBWP.1.1 |
| PDSCH Reference measurement channel | Config 1,2 | | SR.3.1 TDD |
| RMSI CORESET Reference Channel | Config 1,2 | | CR.3.1 TDD |
| PDCCH CORESET parameters | Config 1,2 | | CCR.3.1 TDD |
| OCNG Patterns | | | OP.1 |
| SMTTC Configuration | Config 1,2 | | SMTTC.1 FR2 |
| SSB Configuration | Config 1,2 | | SSB.1 FR2 |
| TRS configuration | Config 1,2 | | TRS.2.1 TDD |
| TCI state | Config 1,2 | | TCI.State.0 |
| EPRE ratio of PSS to SSS | | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | |
| Propagation Condition | | | AWGN |
| Time offset to cell1 ^{Note 2} | | μs | 3 |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |
| Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells | | | |

Table A.5.5.2.5.1-4: NR cell specific OTA related test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated E_UTRAN SCC in synchronous EN-DC

| Parameter | Unit | Cell2 |
|---|--------------------------------|--------------------------------------|
| Angle of arrival configuration | | Setup 1 according to clause A.3.15.1 |
| N_{oc} ^{Note1} | dBm/15kHz ^{Note4} | -112 |
| N_{oc} ^{Note1} | dBm/SCS ^{Note3} | -102.97 |
| \hat{E}_s / N_{oc} | dB | 17 |
| SS-RSRP ^{Note2} | dBm/SCS ^{Note4} | -85.97 |
| \hat{E}_s / I_{ot} | dB | 17 |
| I_o ^{Note2} | dBm/95.04 MHz ^{Note4} | -56.90 |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone</p> | | |

A.5.5.2.5.2 Test Requirements

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table A.5.5.2.5.2-1.

Table A.5.5.2.5.2-1: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

| μ | NR Slot length (ms) | Interruption length (slot) |
|-------|---------------------|----------------------------|
| 3 | 0.125 | 5 |

Table A.5.5.2.5.2-2: Void

Each interruption on E-UTRAN PCell shall not exceed 1 subframe if the PCell is not in the same band as the deactivated SCell, or 5 subframes if the PCell is in the same band as the deactivated SCell.

Each interruption on E-UTRAN PCell shall not exceed 1 subframe.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.2.6 E-UTRAN – NR FR2 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

A.5.5.2.6.1 Test Purpose and Environment

The purpose of this test is to verify E-UTRAN PCell and NR PSCell interruptions during the measurement on the deactivated E-UTRAN SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for E-UTRAN PCell and NR PSCell in EN-DC specified in clause 8. 2.1.2. Supported test configurations are shown in table A.5.5.2.6.1-1.

The general test parameters are given in Table A.5.5.2.6.1-2, and NR cell specific test parameters are given in Table A.5.5.2.6.1-3 and A.5.5.2.6.1-4 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-2. In the test there are three cells: Cell1 Cell2 and Cell3. Cell1 and Cell3 is LTE PCell and LTE deactivated SCell, Cell2 is NR FR2 PSCell. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. The point in time at which the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated E-UTRA SCell is received by the UE, defines the start of time period T1. During T1, LTE PCell and NR PSCell are continuously scheduled in DL.

Table A.5.5.2.6.1-1: Interruption during measurements on deactivated E-UTRAN SCC supported test configurations

| Config | Description |
|--------|--|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.5.5.2.6.1-2: General test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

| Parameter | Unit | Value | Comment |
|---|------|---------|--|
| RF Channel Number | | 1, 2, 3 | One is NR RF channel and two are E-UTRAN RF channels |
| Active PCell | | Cell1 | PCell on E-UTRAN RF channel number 1. |
| Configured PSCell | | Cell2 | PSCell on NR RF channel number 2. |
| Configured deactivated SCell | | Cell3 | Deactivated SCell on E-UTRAN RF channel number 3. |
| CP length | | Normal | Applicable to cell1, cell 2 and cell3 |
| DRX | | OFF | |
| Measurement gap pattern Id | | OFF | |
| SCell measurement cycle (<i>measCycleSCell</i>) | ms | 640 | |
| T1 | s | 10 | |

Table A.5.5.2.6.1-3: NR cell specific test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated E_UTRAN SCC in asynchronous EN-DC

| Parameter | | Unit | Cell 2 |
|--|------------|------|-----------------------------|
| Frequency Range | | | FR2 |
| Duplex mode | Config 1,2 | | TDD |
| TDD configuration | Config 1,2 | | TDDConf.3.1 |
| BW _{channel} | Config 1,2 | MHz | 100: N _{RB,c} = 66 |
| Downlink initial BWP Configuration | Config 1,2 | | DLBWP.0.1 |
| Downlink dedicated BWP Configuration | Config 1,2 | | DLBWP.1.1 |
| Uplink initial BWP configuration | Config 1,2 | | ULBWP.0.1 |
| Uplink dedicated BWP configuration | Config 1,2 | | ULBWP.1.1 |
| PDSCH Reference measurement channel | Config 1,2 | | SR.3.1 TDD |
| RMSI CORESET Reference Channel | Config 1,2 | | CR.3.1 TDD |
| PDCCH CORESET parameters | Config 1,2 | | CCR.3.1 TDD |
| OCNG Patterns | | | OP.1 |
| SMTTC Configuration | Config 1,2 | | SMTTC.1 FR2 |
| SSB Configuration | Config 1,2 | | SSB.1 FR2 |
| TRS configuration | Config 1,2 | | TRS.2.1 TDD |
| TCI state | Config 1,2 | | TCI.State.0 |
| EPRE ratio of PSS to SSS | | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | |
| Propagation Condition | | | AWGN |
| Time offset to cell1 ^{Note 2} | | ms | 3 |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |
| Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells | | | |

Table A.5.5.2.6.1-4: NR cell specific OTA related test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated E_UTRAN SCC in asynchronous EN-DC

| Parameter | Unit | Cell2 |
|--------------------------------|--|--------------------------------------|
| Angle of arrival configuration | | Setup 1 according to clause A.3.15.1 |
| N_{oc} ^{Note1} | dBm/15kHz ^{Note4} | -112 |
| N_{oc} ^{Note1} | dBm/SCS ^{Note3} | -102.97 |
| \hat{E}_s / N_{oc} | dB | 17 |
| SS-RSRP ^{Note2} | dBm/SCS ^{Note4} | -85.97 |
| \hat{E}_s / I_{ot} | dB | 17 |
| I_o ^{Note2} | dBm/95.04 MHz ^{Note4} | -56.90 |
| Note 1: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | |
| Note 2: | SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | |
| Note 3: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | |
| Note 4: | Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone | |
| Note 5: | As observed with 0dBi gain antenna at the centre of the quiet zone | |

A.5.5.2.6.2 Test Requirements

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table A.5.5.2.6.2-1.

Table A.5.5.2.6.2-1: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

| μ | NR Slot length (ms) | Interruption length (slot) |
|-------|---------------------|----------------------------|
| 3 | 0.125 | 5 |

Table A.5.5.2.6.2-2: Void

Each interruption on E-UTRAN PCell shall not exceed 1 subframe if the PCell is not in the same band as the deactivated SCell, or 5 subframes if the PCell is in the same band as the deactivated SCell.

Each interruption on E-UTRAN PCell shall not exceed 1 subframe.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.3 SCell Activation and Deactivation Delay

A.5.5.3.1 SCell Activation and deactivation of SCell in FR2 intra-band

A.5.5.3.1.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.4.5.3.1.1 except the SCell is in FR2 intra-band.

The supported test configurations are shown in table A.5.5.3.1.1-1 below. The general and cell specific test parameters are the same except those described in the following clause. The listed parameter values in Tables A.5.5.3.1.1-2 and A.5.5.3.1.1-3 will replace the values of corresponding parameters in Tables A.4.5.3.1.1-2 and A.4.5.3.1.1-3. In this case, OTA related test parameters are shown in table A.5.5.3.1.1-4 below.

Table A.5.5.3.1.1-1: Supported test configurations for FR2 SCell activation case with FR2 PSCell

| Configuration | Description |
|---|---|
| 1 | FDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | TDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to pass in one of the supported test configurations | |

Table A.5.5.3.1.1-2: General test parameters for FR2 SCell activation case with FR2 PSCell

| Parameter | Unit | Value | Comment |
|--------------|------|--------|--|
| Active PCell | | Cell 1 | Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.2 |

Table A.5.5.3.1.1-3: Cell specific test parameters for FR2 SCell activation case with FR2 PSCell

| Parameter ^{Note 5} | Unit | Cell 2 | | | Cell 3 | | |
|-----------------------------|------|--------|----|----|--------|----|----|
| | | T1 | T2 | T3 | T1 | T2 | T3 |
| | | | | | | | |

| | | | |
|--|-----------|-----------------------------|-----------------------------|
| SSB ARFCN | | freq1 | freq2 |
| Duplex mode | | TDD | TDD |
| TDD configuration | | TDDConf.3.1 | TDDConf.3.1 |
| BW _{channel} | MHz | 100: N _{RB,c} = 66 | 100: N _{RB,c} = 66 |
| PDSCH Reference measurement channel | | SR.3.1 TDD | SR.3.1 TDD |
| RMSI CORESET Reference Channel | | CR.3.1 TDD | CR.3.1 TDD |
| RMC CORESET Reference Channel | | CCR.3.1 TDD | CCR.3.1 TDD |
| DL initial BWP configuration | | DLBWP.0.1 | |
| DL dedicated BWP configuration | | DLBWP.1.1 | |
| UL initial BWP configuration | | ULBWP.0.1 | |
| UL dedicated BWP configuration | | ULBWP.1.1 | |
| OCNG Patterns | | OP.1 | |
| SMTc configuration | | SMTc.1 | |
| SSB configuration | | SSB.1 FR2 | |
| TCI state | TCI state | TCI.State.0 | |
| TRS configuration | | TRS.2.1 TDD | |
| EPRE ratio of PSS to SSS | dB | 0 | |
| EPRE ratio of PBCH_DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | |
| Propagation conditions | | AWGN | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 5: All parameters apply for configuration 1 and 2</p> | | | |

Table A.5.5.3.1.1-4: OTA related test parameters for FR2 SCell activation case with FR2 PSCell

| Parameter ^{Note 6} | Unit | Cell 2 | | | Cell 3 | | |
|-----------------------------|------|--------|----|----|--------|----|----|
| | | T1 | T2 | T3 | T1 | T2 | T3 |

| Angle of arrival configuration | | Setup 1 according to A.3.15.1 | |
|---|--|-------------------------------|---------|
| N_{oc} ^{Note1} | $\text{dBm}/15\text{kHz}$ ^{Note4} | -112 | -112 |
| N_{oc} ^{Note1} | dBm/SCS ^{Note3} | -102.97 | -102.97 |
| \hat{E}_s/N_{oc} | dB | 14 | 14 |
| SS-RSRP ^{Note2} | dBm/SCS ^{Note4} | -88.97 | -88.97 |
| \hat{E}_s/I_{ot} | dB | 14 | 14 |
| I_o ^{Note2} | $\text{dBm}/95.04$ ^{Note4} MHz | -88.80 | -88.80 |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone</p> <p>Note 6: All parameters apply for configuration 1 and 2</p> | | | |

A.5.5.3.1.2 Test Requirements

The test requirements defined in clause A.4.5.3.1.2 shall apply to this test case, except $T_{\text{activation_time}}$ will be replaced with the value $[T_{\text{SMTC_SCell}} + 5\text{ms}]$ as defined in clause 8.3.

A.5.5.3.2 SCell Activation and deactivation of known SCell in FR1 for 160ms SCell measurement cycle

A.5.5.3.2.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.4.5.3.1.1, except PSCell is in FR2.

The supported test configurations are shown in table A.5.5.3.2.1-1 below. The general test parameters are the same in Tables A.4.5.3.1.1-2. The cell specific test parameters are given in Tables A.5.5.3.2.1-2. In this case, OTA related test parameters are the same as in table A.5.5.3.2.1-3.

Table A.5.5.3.2.1-1: Supported test configurations for FR1 SCell activation case with PSCell is FR2

| Configuration | Description |
|---------------|---|
| 1 | FDD LTE PCell, Cell 2 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Cell 3 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | FDD LTE PCell, Cell 2 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Cell 3 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | FDD LTE PCell, Cell 2 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Cell 3 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | TDD LTE PCell, Cell 2 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Cell 3 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | TDD LTE PCell, Cell 2 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Cell 3 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | TDD LTE PCell, Cell 2 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Cell 3 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |

Note: The UE is only required to pass in one of the supported test configurations

Table A.5.5.3.2.1-2: Cell specific test parameters for FR1 SCell activation case with FR2 PSCell

| Parameter | | Unit | Cell 2 | | | Cell 3 | | |
|-------------------------------------|----------------|--------------------|-----------------------------|----|----|-----------------------------|----|----|
| | | | T1 | T2 | T3 | T1 | T2 | T3 |
| SSB ARFCN | | | freq2 | | | freq1 | | |
| Duplex mode | Config 1,4 | | TDD | | | FDD | | |
| | Config 2,3,5,6 | | TDD | | | TDD | | |
| TDD configuration | Config 1,4 | | TDDConf.3.1 | | | Not Applicable | | |
| | Config 2,5 | | | | | TDDConf.1.1 | | |
| | Config 3,6 | | | | | TDDConf.2.1 | | |
| BW _{channel} | Config 1,4 | MHz | 100: N _{RB,c} = 66 | | | 10: N _{RB,c} = 52 | | |
| | Config 2,5 | | | | | 10: N _{RB,c} = 52 | | |
| | Config 3,6 | | | | | 40: N _{RB,c} = 106 | | |
| | | | | | | | | |
| DL initial BWP configuration | | Config 1,2,3,4,5,6 | DLBWP.0.1 | | | | | |
| DL dedicated BWP configuration | | Config 1,2,3,4,5,6 | DLBWP.1.1 | | | | | |
| UL initial BWP configuration | | Config 1,2,3,4,5,6 | ULBWP.0.1 | | | | | |
| UL dedicated BWP configuration | | Config 1,2,3,4,5,6 | ULBWP.1.1 | | | | | |
| DRx Cycle | | ms | Not Applicable | | | | | |
| PDSCH Reference measurement channel | Config 1,4 | | SR.3.1 TDD | | | SR.1.1 FDD | | |
| | Config 2,5 | | | | | SR.1.1 TDD | | |
| | Config 3,6 | | | | | SR.2.1 TDD | | |
| RMSI CORESET Reference Channel | Config 1,4 | | CR.3.1 TDD | | | CR.1.1 FDD | | |
| | Config 2,5 | | | | | CR.1.1 TDD | | |
| | Config 3,6 | | | | | CR.2.1 TDD | | |
| RMC CORESET Reference Channel | Config 1,4 | | CCR.3.1 TDD | | | CCR.1.1 FDD | | |
| | Config 2,5 | | | | | CCR.1.1 TDD | | |
| | Config 3,6 | | | | | CCR.2.1 TDD | | |
| OCNG Patterns | | | OP.1 | | | | | |
| SMTC configuration | | | SMTC.1 | | | | | |
| TCI state | | | TCI.State.0 | | | NA | | |

| | | | | |
|---|----------------|-----|-------------|------------------------------------|
| TRS configuration | Config 1,4 | | TRS.2.1 TDD | TRS.1.1 FDD |
| | Config 2,5 | | | TRS.1.1 TDD |
| | Config 3,6 | | | TRS.1.2 TDD |
| SSB configuration | Config 1,2,4,5 | | SSB.1 FR2 | SSB.1 FR1 |
| | Config 3,6 | | | SSB.2 FR1 |
| PDSCH/PDCCH subcarrier spacing | Config 1,2,4,5 | kHz | 120kHz | 15kHz |
| | Config 3,6 | | | 30kHz |
| EPRE ratio of PSS to SSS | | dB | | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | |
| Propagation condition | - | | AWGN | NA Link only, see clause A.3.7A |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.]</p> | | | | |

Table A.5.5.3.2.1-3: OTA related test parameters for FR1 SCell activation case with FR2 PSCell

| Parameter | Unit | Cell 2 | | | Cell 3 | | | | | |
|---|--------------------|--------------------------------------|----|----|------------------------------------|----|----|---------|--|--|
| | | T1 | T2 | T3 | T1 | T2 | T3 | | | |
| Angle of arrival configuration | | Setup 1 according to clause A.3.15.1 | | | NA Link only, see clause A.3.7A | | | | | |
| N_{oc} ^{Note1} | dBm/15kHz | -112 | | | | | | | | |
| N_{oc} ^{Note1} | Config 1,2,4,5 | dBm/SCS | | | | | | -102.97 | | |
| | Config 3,6 | | | | | | | | | |
| SS-RSRP ^{Note2} | Config 1,2,4,5 | dBm/SCS ^{Note3} | | | | | | -85.97 | | |
| | Config 3,6 | | | | | | | | | |
| \hat{E}_s / N_{oc} | Config 1,2,3,4,5,6 | dB | | | | | | 17 | | |
| \hat{E}_s / I_{ot} | | dB | | | 17 | | | | | |
| I_o ^{Note2} | Config 1,2,4,5 | dBm/ChBw ^{Note4,Note6} | | | -56.90 | | | | | |
| | Config 3,6 | | | | | | | | | |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone</p> <p>Note 6: ChBw is 94.04 MHz for Cell2, 9.36 MHz for Cell 3 in configurations 1,2,4,5, 38.1 MHz in configurations 3,6</p> | | | | | | | | | | |

A.5.5.3.2.2 Test Requirements

The test requirements defined in clause A.4.5.3.1.2 shall apply to this test case.

A.5.5.3.3 Void

A.5.5.3.4 Void

A.5.5.3.5 SCell Activation and deactivation of SCell in FR2

A.5.5.3.5.1 Test Purpose and Environment

The purpose of this test is to verify that the SCell activation and deactivation times are within the requirements stated in clause 8.3, when the SCell is in FR2.

The supported test configurations are shown in table A.5.5.3.5.1-1 below. The test parameters are the same except those described in the following clause. The listed parameter values in Tables A.5.5.3.5.1-2 will replace the values of corresponding parameters in Tables A.5.5.3.5.1-2. The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are three carriers, E-UTRA has one cell (Cell 1), NR has two cells, PSCell (Cell 2) in FR1 and SCell (Cell 3) in FR2. Cell 1 and Cell 2 have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRAN and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 3) becomes configured on NR. During T1 the SCell is powered off and UE is not aware of SCell.

A MAC message for activation of SCell is sent by the test equipment [100ms] after the RRC message, in a slot # denoted m . The point in time at which the MAC message for activation of SCell is received at the UE antenna connector defines the start of time period T2. Immediately at beginning of T2 the transmission power of cell 3 is increased to same level as for cell 2. The UE shall be able to report valid CSI for the activated SCell at latest in slot $(m+T_{\text{HARQ}}+T_{\text{activation_time}}+T_{\text{CSI_Reporting}})$ as defined in clause 8.3 provided the SCell can be successfully detected on the first attempt. The UE shall start reporting CSI in slot $(m+k)$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PCell interruption due to activation of SCell shall occur in the slot $(m+1+[T_{\text{HARQ}}])$ to $(m+1+[T_{\text{HARQ}}+3\text{ms}+T_{\text{SMTc_MAX}}+T_{\text{SMTc_duration}}])$ as defined in clause 8.3.

Time period T3 starts when a MAC message for deactivation of the SCell, sent from the test equipment to the UE in a slot # denoted n , is received at the UE antenna connector. The UE shall carry out deactivation of the SCell at latest in slot $(n+[T_{\text{HARQ}}+3\text{ms}])$ as defined in clause 8.3, and any PCell and PSCell interruption due to the deactivation shall occur in the $(n+1+[T_{\text{HARQ}}])$ to $(n+1+[T_{\text{HARQ}}+3\text{ms}])$ as defined in clause 8.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PSCell during activation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell1 deactivation command is sent until CSI reporting for SCell1 is discontinued.

Table A.5.5.3.5.1-1: FR2 SCell activation in non-DRX test configurations with FR1 PSCell

| Configuration | Description |
|---------------|---|
| 1 | LTE FDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE FDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD PCell, Cell 2 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 5 | LTE TDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD PCell, Cell 2 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |

Note: The UE is only required to be tested in one of the supported test configurations

Table A.5.5.3.5.1-2: General test parameters for FR2 SCell activation case with FR1 PSCell

| Parameter | Unit | Value | Comment |
|--------------|------|--------|--|
| Active PCell | | Cell 1 | Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.2 |

Table A.5.5.3.5.1-3: Cell specific test parameters for FR2 SCell activation case with FR1 PSCell

| Parameter | Unit | Cell 2 | | | Cell 3 | | |
|-------------------------------------|----------------|-----------------------------|----|----|-----------------------------|----|----|
| | | T1 | T2 | T3 | T1 | T2 | T3 |
| SSB ARFCN | | freq1 | | | freq2 | | |
| Duplex mode | Config 1,4 | FDD | | | TDD | | |
| | Config 2,3,5,6 | TDD | | | TDD | | |
| TDD configuration | Config 1,4 | Not Applicable | | | TDDConf.3.1 | | |
| | Config 2,5 | TDDConf.1.1 | | | | | |
| | Config 3,6 | TDDConf.2.1 | | | | | |
| BW _{channel} | Config 1,4 | 10: N _{RB,c} = 52 | | | 100: N _{RB,c} = 66 | | |
| | Config 2,5 | 10: N _{RB,c} = 52 | | | | | |
| | Config 3,6 | 40: N _{RB,c} = 106 | | | | | |
| BWP BW | Config 1,4 | 10: N _{RB,c} = 52 | | | 100: N _{RB,c} = 66 | | |
| | Config 2,5 | 10: N _{RB,c} = 52 | | | | | |
| | Config 3,6 | 40: N _{RB,c} = 106 | | | | | |
| DRx Cycle | ms | Not Applicable | | | | | |
| PDSCH Reference measurement channel | Config 1,4 | SR.1.1 FDD | | | SR.3.1 TDD | | |
| | Config 2,5 | SR.1.1 TDD | | | | | |
| | Config 3,6 | SR.2.1 TDD | | | | | |
| RMSI CORESET Reference Channel | Config 1,4 | CR.1.1 FDD | | | CR.3.1 TDD | | |
| | Config 2,5 | CR.1.1 TDD | | | | | |
| | Config 3,6 | CR.2.1 TDD | | | | | |
| RMC CORESET Reference Channel | Config 1,4 | CCR.1.1 FDD | | | CCR.3.1 TDD | | |
| | Config 2,5 | CCR.1.1 TDD | | | | | |
| | Config 3,6 | CCR.2.1 TDD | | | | | |
| OCNG Patterns | | OP.1 | | | | | |
| SMTC configuration | | SMTC.1 | | | | | |
| TCI state | | NA | | | TCI.State.0 | | |
| TRS configuration | Config 1,4 | TRS.2.1 TDD | | | TRS.2.1 TDD | | |

| | | | | |
|--|----------------|-----|-------------------------------------|-----------|
| | Config 2,5 | | TRS.1.1 TDD | |
| | Config 3,6 | | TRS.1.2 TDD | |
| SSB configuration | Config 1,2,4,5 | | SSB.1 FR1 | SSB.1 FR2 |
| | Config 3,6 | | SSB.2 FR1 | |
| PDSCH/PDCCH subcarrier spacing | Config 1,2,4,5 | kHz | 15 kHz | 120 kHz |
| | Config 3,6 | | 30 kHz | |
| EPRE ratio of PSS to SSS | | dB | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | |
| Propagation condition | | - | N/A Link only, see clause A.3.7A | AWGN |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.</p> | | | | |

Table A.5.3.5.1-4: OTA related test parameters for FR2 SCell activation case with FR1 PSCell

| Parameter | Unit | Cell 2 | | | Cell 3 | | | | | |
|--|--------------------|------------------------------------|----|----|--------------------------------------|----|----|---------|--|--|
| | | T1 | T2 | T3 | T1 | T2 | T3 | | | |
| Angle of arrival configuration | | NA | | | Setup 1 according to clause A.3.15.1 | | | | | |
| N_{oc} ^{Note1} | dBm/15kHz | NA Link only, see clause A.3.7A | | | -112 | | | | | |
| N_{oc} ^{Note1} | Config 1,2,4,5 | | | | dBm/SCS | | | -102.97 | | |
| | Config 3,6 | | | | | | | | | |
| SS-RSRP ^{Note2} | Config 1,2,4,5 | | | | dBm/SCS | | | -85.97 | | |
| | Config 3,6 | | | | Note3 | | | | | |
| \hat{E}_s / N_{oc} | Config 1,2,3,4,5,6 | | | | dB | | | 17 | | |
| \hat{E}_s / I_{ot} | | | | | dB | | | 17 | | |
| I_o ^{Note2} | Config 1,2,4,5 | dBm/ChBw | | | -56.90 | | | | | |
| | Config 3,6 | Note4,Note6 | | | | | | | | |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone</p> <p>Note 6: ChBw is 94.04 MHz for Cell2, 9.36 MHz for Cell 3 in configurations 1,2,4,5, 38.1 MHz in configurations 3,6</p> | | | | | | | | | | |

A.5.3.5.2 Test Requirements

The test requirements defined in clause A.5.3.5.2 shall apply to this test case, except $T_{activation_time}$ will be replaced with the value $[TBD * T_{SMTC_SCell} + 5 \text{ ms}]$ as defined in clause 8.3.

A.5.5.4 Void

A.5.5.5 Beam Failure Detection and Link recovery procedures

A.5.5.5.1 EN-DC Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with SSB-based BFD and LR in non-DRX mode

A.5.5.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.5.5.5.1.1-1, A.5.5.5.1.1-2, A.5.5.5.1.1-3 and A.5.5.5.1.1-4 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.5.1.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSB in set q_0 in the active PSCell to emulate SSB based beam failure. Figure A.5.5.5.1.1-1 additionally shows the variation of the downlink SNR of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

Table A.5.5.5.1.1-1: Supported test configurations for FR2 PSCell

| Configuration | Description |
|--|--|
| 1 | LTE FDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth |
| 2 | LTE TDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth |
| Note: The UE is only required to pass in one of the supported test configurations in FR2 | |

Table A.5.5.5.1.1-2: General test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

| Parameter | Unit | Value | Comment |
|--------------------------------|-------------|----------------------|---------|
| | | Test 1 | |
| Active E-UTRA PCell | | Cell 1 | |
| E-UTRA RF Channel Number | | 1 | |
| Active PCell | | Cell 2 | |
| RF Channel Number | | 2 | |
| Duplex mode | Config 1, 2 | TDD | |
| $BW_{channel}$ | Config 1, 2 | 100: $N_{RB,c} = 66$ | |
| DL initial BWP configuration | Config 1, 2 | DLBWP.0.1 | |
| DL dedicated BWP configuration | Config 1, 2 | DLBWP.1.1 | |
| UL initial BWP configuration | Config 1, 2 | ULBWP.0.1 | |
| UL dedicated BWP configuration | Config 1, 2 | ULBWP.1.1 | |
| TDD Configuration | Config 1, 2 | TDDConf.3.1 | |

| | | | | |
|--|---|-----|-----------------|--|
| CORESET Reference Channel | Config 1, 2 | | CR.3.1 TDD | |
| SSB Configuration | Config 1, 2 | | SSB.1 FR2 | |
| SMTC Configuration | Config 1, 2 | | SMTC.3 | |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2 | | 120 KHz | |
| PRACH Configuration | Config 1, 2 | | Table A.3.8.3.4 | |
| SSB index assigned as BFD RS (q_0) | | | 0 | |
| SSB index assigned as CBD RS (q_1) | | | 1 | |
| TCI Configuration | Config 1, 2 | | TBD | |
| OCNG parameters | | | OP.1 | |
| CP length | | | Normal | |
| Beam failure detection transmission parameters | DCI format | | 1-0 | |
| | Number of Control OFDM symbols | | 2 | |
| | Aggregation level | CCE | 8 | |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 | |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 | |
| | DMRS precoder granularity | | REG bundle size | |
| REG bundle size | | | 6 | |
| DRX | | | OFF | |
| Gap pattern ID | | | gp0 | |
| rimInSyncOutOfSyncThreshold | | | absent | When the field is absent, the UE applies the value 0. (Table 8.1.1-1). |
| rsrp-ThresholdSSB | dBm | | TBD | Threshold used for $Q_{in_LR_SSB}$ |
| powerControlOffsetSS | | | db0 | Used for deriving rsrp-ThresholdCSI-RS |
| beamFailureInstanceMaxCount | | | n1 | see TS 38.321 [7], clause 5.17 |
| beamFailureDetectionTimer | | | pbfd4 | see TS 38.321 [7], clause 5.17 |

| | | | | |
|---|-------------|----|----------------|---|
| CSI-RS configuration for CSI reporting | Config 1, 2 | | CSI-RS.3.1 TDD | |
| TCI states | | | [TCI.State.0] | TCI.State.0 |
| CSI-RS for tracking | Config 1, 2 | | TRS.2.1 TDD | |
| SSB index assigned as RLM RS | | | 0, 1 | |
| T310 Timer | | ms | 1000 | |
| N310 | | | 2 | |
| T1 | | s | 1 | During this time the the UE shall be fully synchronized to cell 1 |
| T2 | | s | 2.61 | |
| T3 | | s | 1.64 | |
| T4 | | S | 0 | |
| T5 | | s | 1.01 | |
| D1 | | s | 0.97 | |
| Note 1: All configurations are assigned to the UE prior to the start of time period T1. | | | | |
| Note 2: UE-specific PDCCH is not transmitted after T1 starts. | | | | |

Table A.5.5.1.1-3: Cell specific test parameters for FR2 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

| Parameter | | Unit | Test 1 | | | | |
|-----------------------------------|--|----------|---------------------------|-----|-----|-----|-----|
| | | | T1 | T2 | T3 | T4 | T5 |
| AoA setup | | | Setup 1 defined in A.3.15 | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | dB | 0 | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | dB | | | | | |
| EPRE ratio of PBCH DMRS to SSS | | dB | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | dB | | | | | |
| EPRE ratio of PSS to SSS | | dB | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | dB | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | dB | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | dB | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | dB | | | | | |
| SNR_SSB of set q_0 | | Config 1 | 5 | -3 | -12 | -12 | -12 |
| | | Config 2 | 5 | -3 | -12 | -12 | -12 |
| SNR_SSB of set q_1 | | Config 1 | -12 | -12 | 5 | 5 | 5 |
| | | Config 2 | -12 | -12 | 5 | 5 | 5 |
| N_{oc} | | Config 1 | TBD | | | | |
| | | Config 2 | TBD | | | | |

| Propagation condition | TDL-A 30ns 75Hz |
|-----------------------|---|
| Note 1: | OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
| Note 2: | The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. |
| Note 3: | NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. |
| Note 4: | Measurement gap configuration is assigned to the UE prior to the start of time period T1. |
| Note 5: | The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. |
| Note 6: | The signal contains PDCCH for UEs other than the device under test as part of OCNG. |
| Note 7: | SNR levels correspond to the signal to noise ratio over the SSS REs. |
| Note 8: | The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.1.1-1. |
| Note 9: | The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6. |

Table A.5.5.1.1-4: Void

| Field | Test 1 Value |
|-----------|--------------|
| gapOffset | 0 |

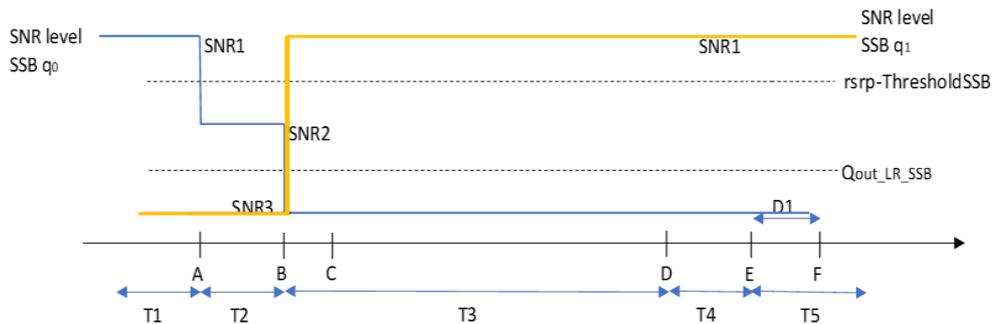


Figure A.5.5.1.1-1: SNR variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.5.5.1.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 960+10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.5.2 EN-DC Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with SSB-based BFD and LR in DRX mode

A.5.5.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.5.5.5.2.1-1, A.5.5.5.2.1-2, A.5.5.5.2.1-3, A.5.5.5.2.1-4 and A.5.5.5.2.1-5 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.5.2.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSB in set q_0 in the active PSCell to emulate SSB based beam failure. Figure A.5.5.5.2.1-1 additionally shows the variation of the downlink SNR of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.5.5.5.2.1-1: Supported test configurations for FR2 PSCell

| Configuration | Description |
|--|--|
| 1 | LTE FDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth |
| 2 | LTE TDD, TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth |
| Note: The UE is only required to pass in one of the supported test configurations in FR2 | |

Table A.5.5.5.2.1-2: General test parameters for FR2 PSCell for SSB-based beam failure detection and link recovery testing in DRX mode

| Parameter | Unit | Value | Comment |
|--------------------------------|-------------|----------------------|---------|
| | | Test 1 | |
| Active E-UTRA PCell | | Cell 1 | |
| E-UTRA RF Channel Number | | 1 | |
| Active PCell | | Cell 2 | |
| RF Channel Number | | 2 | |
| Duplex mode | Config 1, 2 | TDD | |
| $BW_{channel}$ | Config 1, 2 | 100: $N_{RB,c} = 66$ | |
| DL initial BWP configuration | Config 1, 2 | DLBWP.0.1 | |
| DL dedicated BWP configuration | Config 1, 2 | DLBWP.1.1 | |
| UL initial BWP configuration | Config 1, 2 | ULBWP.0.1 | |
| UL dedicated BWP configuration | Config 1, 2 | ULBWP.1.1 | |
| TDD Configuration | Config 1, 2 | TDDConf.3.1 | |

| | | | | |
|--|---|-----|-----------------|--|
| CORESET Reference Channel | Config 1 | | CR. 3.1 TDD | |
| SSB Configuration | Config 1 | | SSB.1 FR2 | |
| | Config 2 | | SSB.2 FR2 | |
| SMTC Configuration | Config 1, 2 | | SMTC.3 | |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2 | | 120 KHz | |
| PRACH Configuration | Config 1, 2 | | Table A.3.8.3.4 | |
| SSB index assigned as BFD RS (q_0) | | | 0 | |
| SSB index assigned as CBD RS (q_1) | | | 1 | |
| TCI Configuration | Config 1, 2 | | TBD | |
| OCNG parameters | | | OP.1 | |
| CP length | | | Normal | |
| Beam failure detection transmission parameters | DCI format | | 1-0 | |
| | Number of Control OFDM symbols | | 2 | |
| | Aggregation level | CCE | 8 | |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 | |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 | |
| | DMRS precoder granularity | | REG bundle size | |
| REG bundle size | | | 6 | |
| DRX | | | DRX.3 | A.3.3.3 |
| Gap pattern ID | | | N.A. | |
| rimInSyncOutOfSyncThreshold | | | absent | When the field is absent, the UE applies the value 0. (Table 8.1.1-1). |
| rsrp-ThresholdSSB | | dBm | TBD | Threshold used for $Q_{in_LR_SSB}$ |
| powerControlOffsetSS | | | db0 | Used for deriving rsrp-ThresholdCSI-RS |
| beamFailureInstanceMaxCount | | | n1 | see TS 38.321 [7], clause 5.17 |
| beamFailureDetectionTimer | | | pbfd4 | see TS 38.321 [7], clause 5.17 |

| | | | | |
|---|-------------|----|----------------|---|
| CSI-RS configuration for CSI reporting | Config 1, 2 | | CSI-RS.3.1 TDD | A.3.14.2 |
| TCI states | | | [TCI.State.0] | TCI.State.0 |
| CSI-RS for tracking | Config 1, 2 | | TRS.2.1 TDD | |
| SSB index assigned as RLM RS | | | 0, 1 | |
| T310 Timer | | ms | 1000 | |
| N310 | | | 2 | |
| T1 | | s | 1 | During this time the the UE shall be fully synchronized to cell 1 |
| T2 | | s | 3.37 | |
| T3 | | s | 2.8 | |
| T4 | | s | 0 | |
| T5 | | s | 0.61 | |
| D1 | | s | 0.57 | |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | | |

Table A.5.5.2.1-3: Cell specific test parameters for FR2 PSCell for SSB-based beam failure detection and link recovery testing in DRX mode

| Parameter | | Unit | Test 1 | | | | |
|-----------------------------------|----------|---|---------------------------|-----|-----|-----|-----|
| | | | T1 | T2 | T3 | T4 | T5 |
| AoA setup | | | Setup 1 defined in A.3.15 | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | dB | 0 | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | dB | | | | | |
| EPRE ratio of PBCH DMRS to SSS | | dB | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | dB | | | | | |
| EPRE ratio of PSS to SSS | | dB | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | dB | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | dB | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | dB | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | dB | | | | | |
| SNR_SSB of set q_0 | Config 1 | dB | 5 | -3 | -12 | -12 | -12 |
| | Config 2 | | 5 | -3 | -12 | -12 | -12 |
| SNR_SSB of set q_1 | Config 1 | dB | -12 | -12 | 5 | 5 | 5 |
| | Config 2 | | -12 | -12 | 5 | 5 | 5 |
| N_{oc} | Config 1 | dBm/12 0 KHz | TBD | | | | |
| | Config 2 | | TBD | | | | |
| Propagation condition | | | TDL-A 30ns 75Hz | | | | |
| Note 1: | | OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | |
| Note 2: | | The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | |
| Note 3: | | NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | |
| Note 4: | | Void | | | | | |
| Note 5: | | The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. | | | | | |
| Note 6: | | The signal contains PDCCH for UEs other than the device under test as part of OCNG. | | | | | |
| Note 7: | | SNR levels correspond to the signal to noise ratio over the SSS REs. | | | | | |
| Note 8: | | The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.2.1-1. | | | | | |
| Note 9: | | The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6. | | | | | |

Table A.5.5.5.2.1-4: Void

Table A.5.5.5.2.1-5: Void

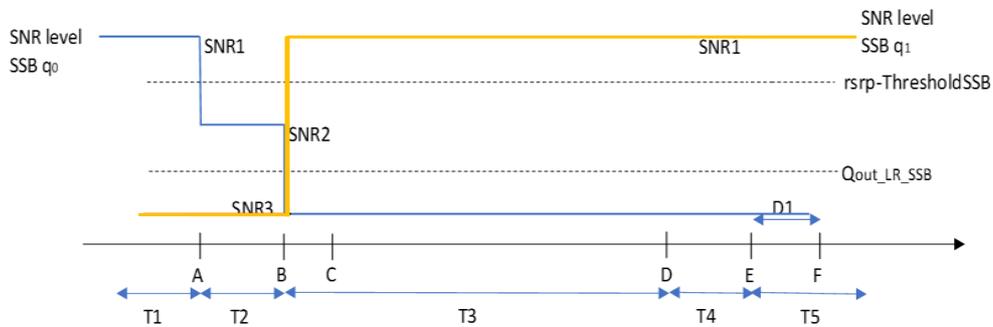


Figure A.5.5.5.2.1-1: SNR variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.5.5.5.2.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 560 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.5.3 EN-DC Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with CSI-RS-based BFD and LR in non-DRX mode

A.5.5.5.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.5.5.5.3.1-1, A.5.5.5.3.1-2, and A.5.5.5.3.1-3 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.5.3.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the CSI-RS in set q_0 in the active PSCell to emulate CSI-RS based beam failure.

Figure A.5.5.3.1-1 additionally shows the variation of the downlink SNR of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. In the test, DRX configuration is not enabled.

Table A.5.5.3.1-1: Supported test configurations for FR2 PSCell

| Configuration | Description |
|---------------|--|
| 1 | LTE FDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth |

Table A.5.5.3.1-2: General test parameters for FR2 PSCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

| Parameter | | Unit | Value | Comment |
|---|---|------|-----------------|---------|
| | | | Test 1 | |
| Active E-UTRA PCell | | | Cell 1 | |
| E-UTRA RF Channel Number | | | 1 | |
| Active PSCell | | | Cell 2 | |
| RF Channel Number | | | 2 | |
| Duplex mode | Config 1 | | TDD | |
| TDD Configuration | Config 1 | | TDDConf.3.1 | |
| CORESET Reference Channel | Config 1 | | CR.3.1 TDD | A.3.1.2 |
| SSB Configuration | Config 1 | | SSB.3 FR2 | A.3.10 |
| SMTC Configuration | Config 1 | | SMTC.3 | A.3.11 |
| PDSCH/PDCCH subcarrier spacing | Config 1 | | 120 KHz | |
| csi-RS-Index assigned as beam failure detection RS in set q_0 | | | 0 | |
| TRS configuration | | | TRS.2.1 TDD | |
| TCI configuration | | | CSI-RS.Config.0 | |
| OCNG parameters | | | OP.1 | A.3.2.1 |
| CP length | | | Normal | |
| Beam failure detection transmission parameters | DCI format | | 1-0 | |
| | Number of Control OFDM symbols | | 2 | |
| | Aggregation level | CCE | 8 | |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 | |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 | |
| | DMRS precoder granularity | | REG bundle size | |
| | REG bundle size | | 6 | |

| | | | | |
|---|----------|-----|----------------|--|
| DRX | | | OFF | |
| Gap pattern ID | | | N.A. | |
| csi-RS-Index assigned as candidate beam detection RS in set q_1 | | | 1 | |
| rlmInSyncOutOfSyncThreshold | | | absent | When the field is absent, the UE applies the value 0. (Table 8.1.1.1-1). |
| rsrp-ThresholdSSB | | dBm | TBD | Threshold used for $Q_{in_LR_SSB}$ |
| powerControlOffsetSS | | | db0 | Used for deriving rsrp-ThresholdCSI-RS |
| beamFailureInstanceMaxCount | | | n1 | see TS 38.321 [7], clause 5.17 |
| beamFailureDetectionTimer | | | pbfd4 | see TS 38.321 [7], clause 5.17 |
| CSI-RS configuration for q_0 and q_1 | Config 1 | | CSI-RS.3.2 TDD | A.3.14.2 |
| CSI-RS configuration for CSI reporting | Config 1 | | CSI-RS.3.1 TDD | A.3.14.2 |
| csi-RS-Index assigned as RLM RS | Config 1 | | CSI-RS.3.2 TDD | A.3.14.2 |
| T310 Timer | | ms | 1000 | |
| N310 | | | 2 | |
| T1 | | s | 1 | During this time the the UE shall be fully synchronized to cell 1 |
| T2 | | s | 1.17 | |
| T3 | | s | 0.9 | |
| T4 | | s | 0 | |
| T5 | | s | 0.31 | |
| D1 | | s | 0.27 | |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | | |

Table A.5.5.3.1-3: Cell specific test parameters for FR2 PSCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

| Parameter | | Unit | Test 1 | | | | |
|-----------------------------------|----------|------|---------------------------|-----|-----|-----|-----|
| | | | T1 | T2 | T3 | T4 | T5 |
| AoA setup | | | Setup 1 defined in A.3.15 | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | dB | 0 | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | dB | | | | | |
| EPRE ratio of PBCH DMRS to SSS | | dB | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | dB | | | | | |
| EPRE ratio of PSS to SSS | | dB | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | dB | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | dB | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | dB | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | dB | | | | | |
| SNR_CSI-RS of set q_0 | Config 1 | dB | 5 | -3 | -12 | -12 | -12 |
| SNR_CSI-RS of set q_1 | Config 1 | dB | -12 | -12 | 5 | 5 | 5 |

| | | | |
|---|----------|-----------------|-----|
| N_{oc} | Config 1 | dBm/15 KHz | TBD |
| Propagation condition | | TDL-A 30ns 75Hz | |
| <p>Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.</p> <p>Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.</p> <p>Note 4: Void</p> <p>Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.</p> <p>Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.</p> <p>Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.</p> <p>Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.3.1-1.</p> <p>Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.</p> | | | |

Table A.5.5.3.1-4: Void

Table A.5.5.3.1-5: Void

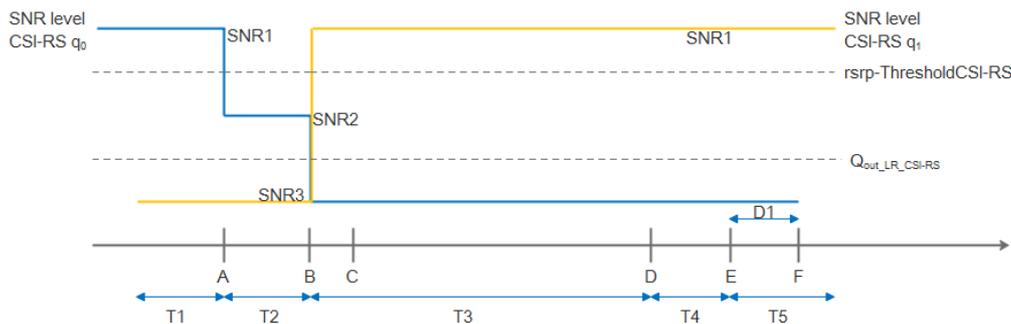


Figure A.5.5.3.1-1: SNR variation for CSI-RS based beam failure detection and link recovery testing in non-DRX mode

A.5.5.5.3.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q1.

No later than time point F occurring no later than $D1 = 260 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q1. The UE shall not transmit preamble on a beam associated with the candidate beam set q1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.5.4 EN-DC Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with CSI-RS-based BFD and LR in DRX mode

A.5.5.5.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.5.5.5.4.1-1, A.5.5.5.4.1-2, A.5.5.5.4.1-3, and A.5.5.5.4.1-4 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.5.4.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the CSI-RS in set q_0 in the active PSCell to emulate CSI-RS based beam failure. Figure A.5.5.5.4.1-1 additionally shows the variation of the downlink SNR of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.5.5.5.4.1-1: Supported test configurations for FR2 PSCell

| Configuration | Description |
|---------------|--|
| 1 | LTE FDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth |

Table A.5.5.5.4.1-2: General test parameters for FR2 PSCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

| Parameter | | Unit | Value | Comment |
|---|--------------------------------|------|-----------------|---------|
| | | | Test 1 | |
| Active E-UTRA PCell | | | Cell 1 | |
| E-UTRA RF Channel Number | | | 1 | |
| Active PSCell | | | Cell 2 | |
| RF Channel Number | | | 2 | |
| Duplex mode | Config 1 | | TDD | |
| TDD Configuration | Config 1 | | TDDConf.3.1 | |
| CORESET Reference Channel | Config 1 | | CR.3.1 TDD | A.3.1.2 |
| SSB Configuration | Config 1 | | SSB.3 FR2 | A.3.10 |
| SMTC Configuration | Config 1 | | SMTC.3 | A.3.11 |
| PDSCH/PDCCH subcarrier spacing | Config 1 | | 120 KHz | |
| csi-RS-Index assigned as beam failure detection RS in set q_0 | | | 0 | |
| TRS configuration | | | TRS.2.1 TDD | |
| TCI configuration | | | CSI-RS.Config.0 | |
| OCNG parameters | | | OP.1 | A.3.2.1 |
| CP length | | | Normal | |
| Beam failure detection transmission parameters | DCI format | | 1-0 | |
| | Number of Control OFDM symbols | | 2 | |

| | | | | |
|---|---|-----|-----------------|--|
| | Aggregation level | CCE | 8 | |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 | |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 | |
| | DMRS precoder granularity | | REG bundle size | |
| | REG bundle size | | 6 | |
| DRX | | | DRX.3 | A.3.3.3 |
| Gap pattern ID | | | N.A. | |
| csi-RS-Index assigned as candidate beam detection RS in set q_1 | | | 1 | |
| rlmInSyncOutOfSyncThreshold | | | absent | When the field is absent, the UE applies the value 0. (Table 8.1.1-1). |
| rsrp-ThresholdSSB | | dBm | TBD | Threshold used for $Q_{in_LR_SSB}$ |
| powerControlOffsetSS | | | db0 | Used for deriving rsrp-ThresholdCSI-RS |
| beamFailureInstanceMaxCount | | | n1 | see TS 38.321 [7], clause 5.17 |
| beamFailureDetectionTimer | | | pbfd4 | see TS 38.321 [7], clause 5.17 |
| CSI-RS configuration for q_0 and q_1 | Config 1 | | CSI-RS.3.2 TDD | A.3.14.2 |
| CSI-RS configuration for CSI reporting | Config 1 | | CSI-RS.3.1 TDD | A.3.14.2 |
| csi-RS-Index assigned as RLM RS | Config 1 | | CSI-RS.3.2 TDD | A.3.14.2 |
| T310 Timer | | ms | 1000 | |
| N310 | | | 2 | |
| T1 | | s | 1 | During this time the the UE shall be fully synchronized to cell 1 |
| T2 | | s | 5.43 | |
| T3 | | s | 5.16 | |
| T4 | | s | 0 | |
| T5 | | s | 0.31 | |
| D1 | | s | 0.27 | |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | | |

Table A.5.5.4.1-3: Cell specific test parameters for FR2 PSCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

| Parameter | | Unit | Test 1 | | | | |
|---|----------|------------|---------------------------|-----|-----|-----|-----|
| | | | T1 | T2 | T3 | T4 | T5 |
| AoA setup | | | Setup 1 defined in A.3.15 | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | dB | 0 | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | dB | | | | | |
| EPRE ratio of PBCH DMRS to SSS | | dB | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | dB | | | | | |
| EPRE ratio of PSS to SSS | | dB | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | dB | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | dB | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | dB | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | dB | | | | | |
| SNR_CSI-RS of set q_0 | Config 1 | dB | 5 | -3 | -12 | -12 | -12 |
| SNR_CSI-RS of set q_1 | Config 1 | dB | -12 | -12 | 5 | 5 | 5 |
| N_{oc} | Config 1 | dBm/15 KHz | TBD | | | | |
| Propagation condition | | | TDL-A 30ns 75Hz | | | | |
| <p>Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.</p> <p>Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.</p> <p>Note 4: Void</p> <p>Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.</p> <p>Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.</p> <p>Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.</p> <p>Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.4.1-1.</p> <p>Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.</p> | | | | | | | |

Table A.5.5.4.1-4: Void

Table A.5.5.4.1-5: Void

Table A.5.5.4.1-6: Void

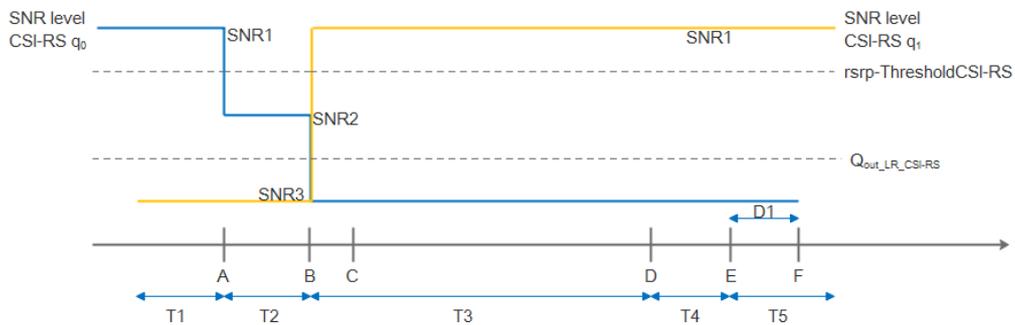


Figure A.5.5.4.1-1: SNR variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

A.5.5.5.4.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 260+10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.5.5 EN-DC scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2 PSCell configured with SSB-based BFD and LR in non-DRX mode

A.5.5.5.5.1 Test Purpose and Environment

The purpose is to test scheduling availability restrictions when the UE is performing beam failure detection or when the UE is performing L1-RSRP measurement for candidate beam detection, when no DRX is used. This test will verify the scheduling availability restriction requirements for SSB based beam failure detection and link recovery for an FR2 serving cell in clause 8.5.7 and 8.5.8.

The test parameters are given in Tables A.5.5.5.5.1-1, A.5.5.5.5.1-2 and A.5.5.5.5.1-3 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.5.5.1-3 shows the variation of the downlink SNR of the PCell and the SNR of the SSB in set q_0 in the active PSCell to emulate SSB based beam failure. Figure A.5.5.5.5.1-3 additionally shows the variation of the downlink SNR of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. This test will focus on the scheduling availability during beam failure detection and candidate beam detection. In the test, DRX configuration is not enabled. Test is to test the scheduling availability restriction of UE performing beam failure detection and candidate beam detection when SSB RS configured for Beam failure detection and candidate beam detection. During the test the UE is scheduled to transmit continuously in UL.

Table A.5.5.5.1-1: Supported test configurations for FR2 PSCell

| Configuration | Description |
|----------------------|--|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.5.5.5.1-2: General test parameters for FR2 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

| Parameter | | Unit | Value Test 1 | Comment |
|--|---|------|-----------------|--|
| Active E-UTRA PCell | | | Cell 1 | |
| E-UTRA RF Channel Number | | | 1 | |
| Active PSCell | | | Cell 2 | |
| RF Channel Number | | | 2 | |
| Duplex mode | Config 1,2 | | TDD | |
| TDD Configuration | Config 1,2 | | TDDConf.3.1 | |
| DL initial BWP configuration | Config 1, 2 | | DLBWP.0.1 | |
| DL dedicated BWP configuration | Config 1, 2 | | DLBWP.1.1 | |
| UL initial BWP configuration | Config 1, 2 | | ULBWP.0.1 | |
| UL dedicated BWP configuration | Config 1, 2 | | ULBWP.1.1 | |
| CORESET Reference Channel | Config 1,2 | | CR.3.1 TDD | |
| SSB Configuration | Config 1,2 | | SSB.1 FR2 | |
| SMTTC Configuration | Config 1,2 | | SMTTC.1 | |
| PDSCH/PDCCH subcarrier spacing | Config 1,2 | | 120 KHz | |
| SSB index assigned as BFD RS (q_0) | | | 0 | |
| SSB index assigned as CBD RS (q_1) | | | 1 | |
| TRS configuration | | | TRS.2.1 TDD | |
| TCI configuration | | | TCI.State.0 | |
| OCNG parameters | | | OP.1 | |
| CP length | | | Normal | |
| Beam failure detection transmission parameters | DCI format | | 1-0 | |
| | Number of Control OFDM symbols | | 2 | |
| | Aggregation level | CCE | 8 | |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 | |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 | |
| | DMRS precoder granularity | | REG bundle size | |
| REG bundle size | | | 6 | |
| DRX | | | OFF | DRX is not in use |
| Gap pattern ID | | | N.A. | No measurement gap pattern is configured |
| ssb-Index | | | 2 | Number of SSB indexes used for beam failure detection |
| rlmInSyncOutOfSyncThreshold | | | absent | When the field is absent, the UE applies the value 0. (Table 8.1.1-1). |
| rsrp-ThresholdSSB | | dBm | -94.5 | Threshold used for $Q_{in_LR_SSB}$ |
| powerControlOffsetSS | | | db0 | Used for deriving rsrp-ThresholdCSI-RS |

| | | | | |
|---|-------------|----|----------------|---|
| beamFailureInstanceMaxCount | | | n2 | see TS 38.321 [7], clause 5.17 |
| beamFailureDetectionTimer | | | pbfd4 | see TS 38.321 [7], clause 5.17 |
| CSI-RS Configuration for reporting | Config 1, 2 | | CSI-RS.3.1 TDD | A.3.14.2 |
| T310 Timer | | ms | 1000 | |
| N310 | | | 2 | |
| T1 | | s | 1 | During this time the UE shall be fully synchronized to cell 1 |
| T2 | | s | 2.6 | |
| T3 | | s | 1.64 | |
| T4 | | s | 0 | |
| T5 | | s | 1.01 | |
| D1 | | s | 0.97 | |
| Note 1: All configurations are assigned to the UE prior to the start of time period T1. | | | | |
| Note 2: UE-specific PDCCH is not transmitted after T1 starts. | | | | |

Table A.5.5.5.1-3: Cell specific test parameters for FR2 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

| Parameter | | Unit | Test 1 | | | | |
|-----------------------------------|----------|------------|---------------------------|-----|-----|-----|-----|
| | | | T1 | T2 | T3 | T4 | T5 |
| AoA setup | | | Setup 1 defined in A.3.15 | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | dB | 0 | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | |
| EPRE ratio of PSS to SSS | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | | | | | | |
| SNR_SSB of set q_0 | Config 1 | dB | 5 | -3 | -12 | -12 | -12 |
| | Config 2 | | 5 | -3 | -12 | -12 | -12 |
| SNR_SSB of set q_1 | Config 1 | dB | -12 | -12 | 5 | 5 | 5 |
| | Config 2 | | -12 | -12 | 5 | 5 | 5 |
| N_{oc} | Config 1 | dBm/15 KHz | -104.7 | | | | |
| | Config 2 | | -104.7 | | | | |

| Propagation condition | TDL-A 30ns 75Hz |
|-----------------------|---|
| Note 1: | OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
| Note 2: | The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. |
| Note 3: | NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. |
| Note 4: | Void |
| Note 5: | The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. |
| Note 6: | The signal contains PDCCH for UEs other than the device under test as part of OCNG. |
| Note 7: | SNR levels correspond to the signal to noise ratio over the SSS REs. |
| Note 8: | The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.5.1-1. |
| Note 9: | The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6. |

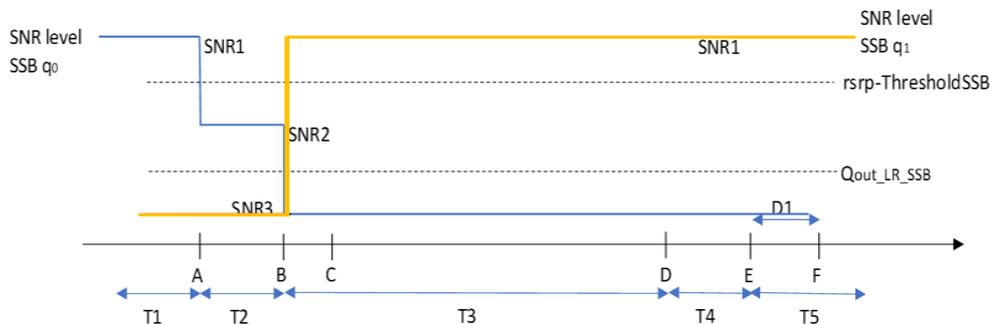


Figure A.5.5.5.1-1: SNR variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.5.5.5.2 Test Requirements

The UE behaviour during time duration T3 follows the requirements defined in clause 8.5.7.3:

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on BFD-RS symbols to be measured for beam failure detection.

The UE behaviour during time durations T4 and T5 follows the requirements defined in clause 8.5.8.3:

- The UE is not expected to transmit PUCCH/PUSCH or receive PDCCH/PDSCH on reference symbols to be measured for candidate beam detection.

A.5.5.6 Active BWP switch

A.5.5.6.1 DCI-based and Timer-based Active BWP Switch

A.5.5.6.1.1 E-UTRAN – NR PSCell FR2 DL active BWP switch with non-DRX in synchronous EN-DC

A.5.5.6.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in TS38.133 clause 8.6, and interruption requirement for E-UTRA victim cell defined in TS36.133 clause 7.32.2.7. Supported test configurations are shown in Table A.5.5.6.1.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) as given in Table A.5.5.6.1.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell is specified in Table A.5.5.6.1.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.5.5.6.1.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and the time duration of T2.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for PSCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell.
- UE is configured with a *bwp-InactivityTimer* timer value for PSCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for PSCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted i . The UE should switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell no later than at the beginning of the DL slot right after slot ($i + T_{BWPswitchDelay} + kI$). The UE shall be continuously scheduled on PSCell's BWP-2 starting from the beginning of the DL slot right after slot ($i + T_{BWPswitchDelay}$).

The starting time of PCell(Cell 1) interruption due to BWP switch on PSCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on PSCell(Cell 2).

During T3,

The time period T3 starts from the slot # j , where j is the beginning slot of the DL subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell at latest at the beginning of the DL slot right after slot ($j+T_{BWPswitchDelay}+kI$). The UE shall be continuously scheduled on PSCell's BWP-1 starting from the beginning of the DL slot right after slot ($j+T_{BWPswitchDelay}$).

The starting time of PCell(Cell 1) interruption due to BWP switch of PSCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in PSCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

The test equipment verifies that potential interruption to E-UTRA PCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell during BWP switch of PSCell, respectively.

Table A.5.5.6.1.1.1-1: DL BWP switch supported test configurations

| Config | Description |
|--|---|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note 1: The UE is only required to be tested in one of the supported test configurations | |
| Note 2: A UE which fulfils the requirements in test case A.5.5.2.2 can skip the test cases in A.5.5.2.1. | |

Table A.5.5.6.1.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

| Parameter | Unit | Value | Comment |
|---|------|--------|--|
| E-UTRA RF Channel Number | | 1 | One E-UTRA radio channel is used for this test |
| NR RF Channel Number | | 2 | One NR radio channel is used for this test |
| Active PCell | | Cell 1 | PCell on RF channel number 1. |
| Active PSCell | | Cell 2 | PSCell on RF channel number 2. |
| CP length | | Normal | |
| DRX | | OFF | For both PCell and PSCell |
| <i>bwp-InactivityTimer</i> | ms | [200] | |
| Cell-individual offset for cells on RF channel number 1 | dB | 0 | Individual offset for cells on PCC. |
| Cell-individual offset for cells on RF channel number 2 | dB | 0 | Individual offset for cells on PSCC. |
| Cell2 timing offset to cell1 | µs | 3 | Synchronous EN-DC |
| T1 | s | [0.2] | |
| T2 | s | [0.2] | |
| T3 | s | [0.2] | |

Table A.5.5.6.1.1.1-3: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

| Parameter | Unit | Cell 2 |
|--|---|---------------------------------|
| Frequency Range | | FR2 |
| Duplex mode | | TDD |
| TDD configuration | | TDDConf.3.1 |
| BW _{channel} | | 100 MHz: N _{RB,c} = 66 |
| Active BWP ID | | 1, 2 |
| Initial DL BWP Configuration | | DLBWP.0.2 ^{Note 2} |
| Active DL BWP-1 Configuration | | DLBWP.1.1 ^{Note 2} |
| Active DL BWP-2 Configuration | | DLBWP.1.3 ^{Note 2} |
| Initial UL BWP Configuration | | ULBWP.0.2 ^{Note 2} |
| Active UL BWP-1 Configuration | | ULBWP.1.1 ^{Note 2} |
| Active UL BWP-2 Configuration | | ULBWP.1.3 ^{Note 2} |
| PDSCH Reference measurement channel | | SR.3.1 TDD |
| RMSI CORESET parameters | | CR.3.1 TDD |
| Dedicated CORESET parameters | | CCR.3.1 TDD |
| OCNG Patterns | | OP.1 |
| SSB Configuration | | SSB.1 FR2 |
| SMTc Configuration | | SMTc.1 |
| TCI State | | TCI.State.0 |
| TRS Configuration | | TRS.2.1 TDD |
| Correlation Matrix and Antenna Configuration | | 1x2 Low |
| EPRE ratio of PSS to SSS | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | |
| EPRE ratio of PBCH to PBCH DMRS | | |
| EPRE ratio of PDCCH DMRS to SSS | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | |
| EPRE ratio of PDSCH DMRS to SSS | | |
| EPRE ratio of PDSCH to PDSCH | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | |
| Propagation Condition | | |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | |
| Note 2: | For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3]. | |

Table A.5.5.6.1.1-4: OTA related test parameters for DL BWP switch in synchronous EN-DC

| Parameter | Unit | Cell 2 |
|---|---------------------------------|--------------------------------------|
| Angle of arrival configuration | | Setup 1 according to clause A.3.15.1 |
| N_{oc} ^{Note 1} | dBm/15 kHz | -112 |
| N_{oc} ^{Note 1} | dBm/SCS | -103 |
| SS-RSRP ^{Note 2} | dBm/120 kHz ^{Note 3} | -85 |
| \hat{E}_s/I_{ot} | dB | 18 |
| I_o ^{Note 2} | dBm/95.04 MHz ^{Note 4} | -56 |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone.</p> | | |

A.5.5.6.1.1.2 Test Requirements

During T1, the UE shall start to send the ACK for PSCell in the DL slot right after DL slot $(i+T_{BWPswitchDelay}+kI)$.

During T3, the UE shall start to send the ACK for PSCell in the DL slot right after DL slot $(j+T_{BWPswitchDelay}+kI)$.

Where, kI is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start time of PCell interruption during PSCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start time of PCell interruption during PSCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in TS36.133 Clause 7.32.2.7.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after DL slot $(i+Y1)$, $(j+Y2)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK.

Editor's note: whether E-UTRA PCell's interruption test requirement is needed or not depends on whether E-UTRA Pcell's interruption could be tested when PSCell is FR2 cell.

A.5.5.6.1.2 E-UTRAN – NR PSCell FR2 DL active BWP switch with FR2 SCell in non-DRX in synchronous EN-DC

A.5.5.6.1.2.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6.2, and interruption requirements for NR victim cell defined in clause 8.2.1.2.7 and interruption requirement for E-UTRA victim cell defined in TS36.133 clause 7.32.2.7. Supported test configurations are shown in Table A.5.5.6.1.2.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), one NR PSCell (Cell 2) and one NR SCell (Cell 3) as given in Table A.5.5.6.1.2.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and SCell are specified in Table A.5.5.6.1.2.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) and SCell (Cell 3) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and the time duration of T2.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC) and Cell 3 (SCell) on radio channel 3 (SCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for PSCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for SCell, BWP-0 in Cell 3 before starting the test.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in SCell.
- UE is configured with a *bwp-InactivityTimer* timer value for PSCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for PSCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted i . The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell no later than at the beginning of the DL slot right after slot ($i + T_{BWPswitchDelay} + kI$). The UE shall be continuously scheduled on PSCell's BWP-2 starting from the beginning of the DL slot right after slot ($i + T_{BWPswitchDelay}$).

PCell(Cell 1) interruption due to BWP switch on PSCell shall occur within the BWP switch delay.

SCell(Cell 3) interruption due to BWP switch on PSCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on PSCell(Cell 2).

During T3,

The time period T3 starts from the slot # j immediately after the slot wherein *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell at latest at the beginning of the DL slot right after slot ($j+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on PSCell's BWP-1 starting from the beginning of the DL slot right after slot ($j+T_{BWPswitchDelay}$).

PCell(Cell 1) interruption due to BWP switch of PSCell shall occur within the BWP switch delay.

SCell(Cell 3) interruption due to BWP switch of PSCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in PSCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

The test equipment verifies that potential interruption to E-UTRA PCell and NR SCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell and SCell during BWP switch of PSCell, respectively.

Table A.5.5.6.1.2.1-1: DL BWP switch supported test configurations

| Config | Description |
|--|---|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note 1: The UE is only required to be tested in one of the supported test configurations | |
| Note 2: A UE which fulfils the requirements in test case A.5.5.6.1.2 can skip the test cases in A.5.5.6.1.1. | |
| Note 3: NR configuration is the same for PSCell and SCells. | |

Table A.5.5.6.1.2.1-2: General test parameters for DL BWP switch in synchronous EN-DC

| Parameter | Unit | Value | Comment |
|---|---------|--------|--|
| E-UTRA RF Channel Number | | 1 | One E-UTRA radio channel is used for this test |
| NR RF Channel Number | | 2, 3 | Two NR radio channel is used for this test |
| Active PCell | | Cell 1 | PCell on RF channel number 1. |
| Active PSCell | | Cell 2 | PSCell on RF channel number 2. |
| Active SCell | | Cell 3 | SCell on RF channel number 3. |
| CP length | | Normal | |
| DRX | | OFF | |
| <i>bwp-InactivityTimer</i> | ms | [200] | |
| Cell-individual offset for cells on RF channel number 1 | dB | 0 | Individual offset for cells on PCC. |
| Cell-individual offset for cells on RF channel number 2 | dB | 0 | Individual offset for cells on PSCC. |
| Cell-individual offset for cells on RF channel number 3 | dB | 0 | Individual offset for cells on SCC. |
| Cell2 timing offset to cell1 | μ s | 3 | Synchronous EN-DC |
| Cell3 timing offset to cell2 | μ s | 3 | Synchronous cells |
| T1 | s | [0.2] | |
| T2 | s | [0.2] | |
| T3 | s | [0.2] | |

Table A.5.5.6.1.2.1-3: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

| Parameter | Unit | Cell 2 | Cell 3 |
|--|---|---------------------------------|-----------|
| Frequency Range | | FR2 | |
| Duplex mode | | TDD | |
| TDD configuration | | TDDConf.3.1 | |
| BW _{channel} | | 100 MHz: N _{RB,c} = 66 | |
| Active BWP ID | | 1, 2 | 0 |
| Initial DL BWP Configuration | | DLBWP.0.2 | DLBWP.0.2 |
| Active DL BWP-0 Configuration | | NA | DLBWP.0.2 |
| Active DL BWP-1 Configuration | | DLBWP.1.3 | NA |
| Active DL BWP-2 Configuration | | DLBWP.1.1 | NA |
| Initial UL BWP Configuration | | ULBWP.0.2 | ULBWP.0.2 |
| Active UL BWP-0 Configuration | | NA | ULBWP.0.2 |
| Active UL BWP-1 Configuration | | ULBWP.1.3 | NA |
| Active UL BWP-2 Configuration | | ULBWP.1.1 | NA |
| PDSCH Reference measurement channel | | SR.3.1 TDD | |
| RMSI CORESET parameters | | CR.3.1 TDD | |
| Dedicated CORESET parameters | | CCR.3.1 TDD | |
| OCNG Patterns | | OP.1 | |
| SSB Configuration | | SSB.1 FR2 | |
| SMTC Configuration | | SMTC.1 | |
| TCI State | | TRS.2.1 TDD | |
| TRS Configuration | | TCI.State.0 | |
| Antenna Configuration | | 1x2 | |
| Propagation Condition | | AWGN | |
| EPRE ratio of PSS to SSS | dB | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled. | | |
| Note 3: | SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | |
| Note 4: | For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3. | | |

Table A.5.5.6.1.2.1-4: OTA related test parameters for DL BWP switch in synchronous EN-DC

| Parameter | Unit | Cell 2 | Cell 3 |
|--|---------------------------------|------------------------------------|--------|
| Angle of arrival configuration | | Setup 1 according to clause A.3.15 | |
| N_{oc} ^{Note 1} | dBm/15 kHz | -112 | -112 |
| SS-RSRP ^{Note 2} | dBm/120 kHz ^{Note 3} | -85 | -85 |
| \bar{E}_s/I_{ot} | dB | 18 | 18 |
| I_o ^{Note 2} | dBm/95.04 MHz ^{Note 4} | -56 | -56 |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone.</p> | | | |

A.5.5.6.1.2.2 Test Requirements

During T1, the UE shall start to send the ACK for PSCell in the DL slot right after slot $(i+T_{BWPswitchDelay}+kI)$.

During T3, the UE shall start to send the ACK for PSCell in the DL slot right after slot $(j+T_{BWPswitchDelay}+kI)$.

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start of the interruption of PCell during PSCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of PCell during PSCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in TS36.133 Clause 7.32.2.7.

During T1, the start of the interruption of SCell during PSCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of SCell during PSCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of SCell shall not be longer than the interruption duration specified for active BWP switch in Clause 8.6.2.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after slot $(i+T_{BWPswitchDelay}+kI)$, $(j+T_{BWPswitchDelay}+kI)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK.

Editor's note: FFS value of $k1$ for type 1 and type 2 UE.

A.5.5.6.2 RRC-based Active BWP Switch

A.5.5.6.2.1 E-UTRAN – NR PSCell FR2 DL active BWP switch with non-DRX in synchronous EN-DC

A.5.5.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6.3. Supported test configurations are shown in Table A.5.5.6.2.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1) and one NR PSCell (Cell 2) as given in Table A.5.5.6.2.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell are specified in Table A.5.5.6.2.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC) and to Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 2 (PSCell).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted i . The UE shall reconfigure its bandwidth part with the updated bandwidth part configuration.

The UE shall be able to completely receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i + T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$) as defined in clause 8.6.3 and be ready for the reception of uplink grant for the PSCell no later than at the beginning of the DL slot right after slot ($i + T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$). The UE shall be continuously scheduled on PSCell's BWP-1 starting from the beginning of the DL slot right after slot ($i + T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$).

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in clause 8.6.3.

The test equipment verifies the DL BWP switch time in PSCell by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when RRC Reconfiguration Complete message is received.

Table A.5.5.6.2.1.1-1: DL BWP switch supported test configurations

| Config | Description |
|--|---|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note 1: The UE is only required to be tested in one of the supported test configurations | |

Table A.5.5.6.2.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

| Parameter | Unit | Value | Comment |
|---|-------------|--------------|--|
| E-UTRA RF Channel Number | | 1 | One E-UTRA radio channel is used for this test |
| NR RF Channel Number | | 2 | One NR radio channel is used for this test |
| Active PCell | | Cell 1 | PCell on RF channel number 1. |
| Active PSCell | | Cell 2 | PSCell on RF channel number 2. |
| CP length | | Normal | |
| DRX | | OFF | |
| Cell-individual offset for cells on RF channel number 1 | dB | 0 | Individual offset for cells on PCC. |
| Cell-individual offset for cells on RF channel number 2 | dB | 0 | Individual offset for cells on PSCC. |
| Cell2 timing offset to cell1 | μ s | 3 | Synchronous EN-DC |
| T1 | s | [0,2] | |

Table A.5.5.6.2.1.1-3: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

| Parameter | | Unit | Cell 2 |
|--|-------------------------------|------|---------------------------------|
| Frequency Range | | | FR2 |
| Duplex mode | | | TDD |
| TDD configuration | | | TDDConf.3.1 |
| BW _{channel} | | | 100 MHz: N _{RB,c} = 66 |
| Active BWP ID | | | 1, 2 |
| Initial DL BWP Configuration | | | DLBWP.0.2 |
| Initial UL BWP Configuration | | | ULBWP.0.2 |
| Initial Condition | Active DL BWP-1 Configuration | | DLBWP.1.3 |
| | Active UL BWP-1 Configuration | | ULBWP.1.3 |
| Final Condition | Active DL BWP-1 Configuration | | DLBWP.1.1 |
| | Active UL BWP-1 Configuration | | ULBWP.1.1 |
| PDSCH Reference measurement channel | | | SR.3.1 TDD |
| RMSI CORESET parameters | | | CR.3.1 TDD |
| Dedicated CORESET parameters | | | CCR.3.1 TDD |
| OCNG Patterns | | | OP.1 |
| SSB Configuration | | | SSB.1 FR2 |
| SMTTC Configuration | | | SMTTC.1 |
| TCI State | | | TCI.State.0 |
| TRS Configuration | | | TRS.2.1 TDD |
| Antenna Configuration | | | 1x2 |
| Propagation Condition | | | AWGN |
| EPRE ratio of PSS to SSS | | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].</p> | | | |

Table A.5.5.6.2.1.1-4: OTA related test parameters for BWP switching test case

| Parameter | | Unit | Cell 2 |
|----------------------------------|--------------|-----------|-----------------------------|
| Angle of arrival configuration | | | Setup 1 according to A.3.15 |
| N _{oc} ^{Note1} | NR_TDD_FR2_A | dBm/15kHz | -112 |
| | NR_TDD_FR2_B | | |
| | NR_TDD_FR2_F | | |

| | | | |
|---|--------------|-----------------------------------|------|
| | NR_TDD_FR2_G | | |
| | NR_TDD_FR2_T | | |
| | NR_TDD_FR2_Y | | |
| N_{oc} ^{Note1} | NR_TDD_FR2_A | dBm/SCS | -103 |
| | NR_TDD_FR2_B | | |
| | NR_TDD_FR2_F | | |
| | NR_TDD_FR2_G | | |
| | NR_TDD_FR2_T | | |
| SS-RSRP ^{Note2} | NR_TDD_FR2_A | dBm/SCS ^{Note3} | -85 |
| | NR_TDD_FR2_B | | |
| | NR_TDD_FR2_F | | |
| | NR_TDD_FR2_G | | |
| | NR_TDD_FR2_T | | |
| | NR_TDD_FR2_Y | | |
| \hat{E}_s/I_{ot} | | dB | 18 |
| I_o ^{Note2} | NR_TDD_FR2_A | dBm/95.04 MHz ^{Note4} | -56 |
| | NR_TDD_FR2_B | | |
| | NR_TDD_FR2_F | | |
| | NR_TDD_FR2_G | | |
| | NR_TDD_FR2_T | | |
| | NR_TDD_FR2_Y | | |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone</p> | | | |

A.5.5.6.2.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PSCell in the beginning of the DL slot right after slot ($i+T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}$).

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.7 PSCell addition and release delay

A.5.5.7.1 Addition and Release Delay of NR PSCell

A.5.5.7.1.1 Test purpose and environment

The purpose of this test is to verify that the NR PSCell addition and release delays under EN-DC are within the requirements stated in clause 7.31.2 of TS 36.133 [15] for the case when the PSCell is unknown by the UE at the time of addition.

Supported test configurations are shown in A.5.5.7.1.1-1. The test parameters for the E-UTRA cell are given in Table A.3.7.2.1-1. The E-UTRA cell once set up is not changed across time.

The test parameters for NR cell are given in Tables A.5.5.7.1.1-2, cell-specific parameters in A.5.5.7.1.1-3 and OTA parameters in A.5.5.7.1.1-4 below. The test consists of four successive time periods with duration of T1, T2, T3 and T4. There are two carriers each with one cell. Before the test starts the UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC) but is not aware of Cell 2 (NR PSCell) on radio channel 2. The UE is only monitoring the PCC. During T1 only Cell1 is known to the UE.

The test system shall send a RRC message to the UE to add PSCell (Cell 2) on radio channel 2. The RRC message (to add PSCell) also includes a request for the UE to start periodic CSI reporting for the PSCell after the PSCell has been successfully added. The RRC message to add PSCell shall be sent to the UE during period T1. The point in time at which the RRC message to add PSCell (Cell2) is received at the UE antenna connector defines the start of period T2.

The test system shall observe the periodic reporting of CSI for PSCell during T3. The point in time at which the UE has sent PRACH to the PSCell (Cell 2) defines the start of period T3.

The test system shall send a RRC message to the UE to release PSCell (Cell 2) on radio channel 2. The RRC message to release PSCell (Cell2) shall be sent to the UE during period T3, after the UE has sent at least one CQI report with non-zero CQI index for PSCell (Cell 2). The point in time at which the RRC message to release PSCell (Cell2) is received at the UE antenna connector defines the start of period T4.

Table A.5.5.7.1.1-1: Supported test configurations for FR2 PSCell

| Configuration | Description |
|---------------|--|
| 1 | LTE FDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz |
| 2 | LTE TDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.5.5.7.1.1-2: General Test Parameters for PSCell Addition and Release

| Parameter | | Unit | Value | Comment |
|---|-----------------|------|---------------------|--|
| RF Channel Number | | | 1, 2 | Two radio channels are used for this test. One for E-UTRA cell and second for NR Cell |
| Initial Condition | Active PCell | | Cell1 | PCell on RF channel number 1. |
| | Neighbour cell | | Cell2 | Neighbour cell on RF channel number 2. |
| Final Condition | Active PCell | | Cell1 | PCell on RF channel number 1. |
| | Neighbour Cell | | Cell2 | PSCell released on RF channel number 2. |
| B1 | Hysteresis | dB | 0 | Hysteresis for evaluation of event B1. |
| | Threshold RSRP | dBm | --100 | Actual RSRP threshold for event B1. Needs to take absolute accuracy tolerance in clause 9.1.11.1 into account plus margin. |
| | Time to Trigger | s | 0 | |
| DRX | | | OFF | Continuous monitoring of primary cell |
| PRACH configuration on cell2 | | | FR2 configuration 2 | Captured in A.3.8.3.2 |
| CQI/PMI periodicity and offset configuration index on cell2 | | | TBD | CQI reporting for PSCell every uplink subframe |
| Cell-individual offset for cells on RF channel number 1 | | dB | 0 | Individual offset for cells on primary component carrier. |
| Cell-individual offset for cells on RF channel number 2 | | dB | 0 | Individual offset for cells on carrier frequency of cell2. |
| T1 | | s | 1 | During this time the PCell shall be known and cell2 shall be unknown. |
| T2 | | s | 1 | During this time the UE adds the PSCell. |
| T3 | | s | 1 | During this time the UE sends CSI reports for PSCell. |
| T4 | | s | 1 | During this time the UE releases the PSCell. |

Table A.5.5.7.1.1-3: Cell Specific Parameters for PSCell Addition and Release

| Parameter | Unit | Config | Test | | | |
|--|------|--------|------------------------|----|----|----|
| | | | T1 | T2 | T3 | T4 |
| E-UTRA Channel Number | | 1,2 | 1 | | | |
| NR Channel Number | | 1,2 | 2 | | | |
| Duplex Mode | | 1,2 | TDD | | | |
| TDD configuration | | 1,2 | TDDConf.1.2 | | | |
| BW _{channel} | MHz | 1,2 | 100: NRB,c = 66 | | | |
| Initial BWP Configuration | | 1,2 | DLBWP.0.1 ULBWP.0.1 | | | |
| Dedicated BWP Configuration | | 1,2 | DLBWP.1.1 ULBWP.1.1 | | | |
| TRS Configuration | | 1 | TRS.2.1 TDD | | | |
| TCI State | | 1 | CSI-RS.Config.0 | | | |
| PDSCH Reference measurement channel | | 1,2 | SR.3.1 TDD | | | |
| RMSI CORESET Reference Channel | | 1,2 | CR.3.1 TDD | | | |
| Dedicated CORESET Reference Channel | | 1,2 | CCR.3.1 TDD | | | |
| OCNG Patterns | | 1,2 | OP.1 | | | |
| SSB configuration | | 1,2 | SSB.1 FR2 | | | |
| SMTc configuration | | 1,2 | SMTc.2 | | | |
| TRS Configuration | | 1,2 | TRS.2.1 TDD | | | |
| EPRE ratio of PSS to SSS | dB | 1,2 | 0 | | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | |
| Propagation condition | | | | | | |

Table A.5.5.7.1.1-4: OTA related test parameters

| Parameter | Unit | Test |
|---|--------------------------------|---|
| Angle of arrival configuration | | Setup 2a according to clause A.3.15.2.1 |
| N_{oc} ^{Note1} | dBm/15kHz ^{Note4} | TBD |
| N_{oc} ^{Note1} | dBm/SCS ^{Note3} | TBD |
| \hat{E}_s / N_{oc} | dB | TBD |
| SS-RSRP ^{Note2} | dBm/SCS ^{Note4} | TBD |
| \hat{E}_s / I_{ot} | dB | TBD |
| I_o ^{Note2} | dBm/95.04 MHz ^{Note4} | TBD |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone</p> | | |

A.5.5.7.1.2 Test Requirements

The UE shall transmit the PRACH to PSCell at latest 582 ms^{Note1} into T2.

The UE shall send at least one CSI report for PSCell with non-zero CQI index during T4.

The UE shall periodically send CSI reports for PSCell after the UE has sent first CQI report with non-zero CQI index during T4

The UE shall stop sending CSI reports for PSCell in at latest [20] ms into T5.

All the above test requirements shall be fulfilled for the observed PSCell addition delay and PSCell release delay to be counted as correct. The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90%.

Note1: The PSCell addition delay can be expressed as follows as specified in clause 7.31.2 of TS 36.133 [15]:

$$T_{\text{config_PSCell}} = T_{\text{RRC_delay}} + T_{\text{processing}} + T_{\text{search}} + T_{\Delta} + T_{\text{PSCell_DU}} + 2\text{ms}$$

Where:

$$T_{\text{RRC_delay}} = 20\text{ms}$$

$$T_{\text{processing}} = 40\text{ms}$$

$$T_{\text{search}} = 8 \cdot 3 \cdot 20 = 480 \text{ ms}$$

$$T_{\Delta} = 20\text{ms}$$

$$T_{\text{PSCell_DU}} = 1 \cdot 10 + 10 = 20 \text{ ms}$$

A.5.5.8 Active TCI state switch delay

A.5.5.8.1 MAC-CE based active TCI state switch

A.5.5.8.1.1 E-UTRAN – NR PSCell FR2 active TCI state switch for a known TCI state

A.5.5.8.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the active TCI state switch delay requirement defined in clause 8.10.3. Supported test configurations are shown in Table A.5.5.8.1.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) as given in Table A.5.5.8.1.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell is specified in Table A.5.5.8.1.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.5.5.8.1.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE is configured with 2 different TCI states for PSCell, PDCCH TCI state 0 (QCL'd to SSB0) and TCI state 1 (QCL'd to SSB1), in Cell 2 before starting the test.
- UE is indicated in TCI state 0 as the active PDCCH TCI state

The test consists of two time periods, T1 and T2. During T1 only SSB to which PDCCH-TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI state 1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a MAC-CE command indicating a switch to TCI state 1. *tcj-
PresentInDCI* is not configured in the PDSCH configuration, i.e. TCI state for the PDSCH is identical to the PDCCH TCI state.

The test equipment verifies that UE can be scheduled on PSCell on TCI state 0 till $n + T_{\text{HARQ}} + 3 \text{ ms} + T_{\text{first-SSB}}$. The test equipment also verifies the TCI state switch time in PSCell by scheduling the UE on TCI state 1 after $n + T_{\text{HARQ}} + 3 \text{ ms} + (T_{\text{first-SSB}} + T_{\text{SSB-proc}})$.

Table A.5.5.8.1.1.1-1: Supported test configurations

| Config | Description |
|--|---|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note 1: The UE is only required to be tested in one of the supported test configurations | |

Table A.5.5.8.1.1-2: General test parameters for TCI state switch

| Parameter | Unit | Value | Comment |
|---|------|--------|--|
| E-UTRA RF Channel Number | | 1 | One E-UTRA radio channel is used for this test |
| NR RF Channel Number | | 2 | One NR radio channel is used for this test |
| Active PCell | | Cell 1 | PCell on RF channel number 1. |
| Active PSCell | | Cell 2 | PSCell on RF channel number 2. |
| CP length | | Normal | |
| DRX | | OFF | For both PCell and PSCell |
| Cell-individual offset for cells on RF channel number 1 | dB | 0 | Individual offset for cells on PCC. |
| Cell-individual offset for cells on RF channel number 2 | dB | 0 | Individual offset for cells on PSCC. |
| Cell2 timing offset to cell1 | μs | 3 | Synchronous EN-DC |
| T1 | s | [0,2] | |
| T2 | s | [0,2] | |

Table A.5.5.8.1.1-3: NR Cell specific test parameters for TCI state switch

| Parameter | Unit | Cell 2 |
|---|------|---------------------------------|
| Frequency Range | | FR2 |
| Duplex mode | | TDD |
| TDD configuration | | TDDConf.3.1 |
| BW _{channel} | | 100 MHz: N _{RB,c} = 66 |
| Initial DL BWP Configuration | | DLBWP.0.2 |
| Dedicated DL BWP Configuration | | DLBWP.1.1 |
| Initial UL BWP Configuration | | ULBWP.0.2 |
| Dedicated UL BWP Configuration | | ULBWP.1.1 |
| PDSCH Reference measurement channel | | SR.3.1 TDD |
| RMSI CORESET parameters | | CR.3.1 TDD |
| Dedicated CORESET parameters | | CCR.3.1 TDD |
| OCNG Patterns | | OP.1 |
| SSB Configuration | | SSB.1 FR2 |
| SMTTC Configuration | | SMTTC.1 |
| TCI State 0 | | TCI.State.0 |
| TCI State 1 | | TCI.State.1 |
| TRS Configuration | | TRS.2.1 TDD |
| Correlation Matrix and Antenna Configuration | | 1x2 Low |
| EPRE ratio of PSS to SSS | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | |
| EPRE ratio of PBCH to PBCH DMRS | | |
| EPRE ratio of PDCCH DMRS to SSS | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | |
| EPRE ratio of PDSCH DMRS to SSS | | |
| EPRE ratio of PDSCH to PDSCH | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | |
| Propagation Condition | | |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | |

Table A.5.5.8.1.1-4: OTA related test parameters for TCI state switch

| Parameter | Unit | Cell 2 | | | |
|--------------------------------|--|--------------------------------------|--------|-----------|--------|
| | | SSB0 | | SSB1 | |
| | | T1 | T2 | T1 | T2 |
| Angle of arrival configuration | | Setup 3 according to clause A.3.15.3 | | | |
| | | AoA1 | | AoA2 | |
| $N_{oc}^{Note\ 1}$ | dBm/15 kHz | [-92.1] | | | |
| $N_{oc}^{Note\ 1}$ | dBm/SCS | [-83.1] | | | |
| \bar{E}_s/N_{oc} | dB | 1 | 1 | -Infinity | 1 |
| SS-RSRP ^{Note 2} | dBm/120 kHz ^{Note 3} | -82.1 | -82.1 | -Infinity | -82.1 |
| $I_o^{Note 2, Note 6}$ | dBm/95.04 MHz ^{Note 4} | -54.94 | -54.94 | -54.94 | -54.94 |
| Note 1: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | |
| Note 2: | SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | |
| Note 3: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | | |
| Note 4: | Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone | | | | |
| Note 5: | As observed with 0dBi gain antenna at the center of the quiet zone. | | | | |

A.5.5.8.1.1.2 Test Requirements

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After receiving MAC-CE command in slot n, UE shall:

- be able to continue to receive on TCI state 0 till $n + T_{HARQ} + 3\text{ ms} + T_{\text{first-SSB}}$
- be able to start receiving on TCI state 1 after $n + T_{HARQ} + 5\text{ ms} + TO_k * T_{\text{first-SSB}}$

A.5.5.8.2 RRC based active TCI state switch

A.5.5.8.2.1 E-UTRAN – NR PSCell FR2 active TCI state switch for a known TCI state

A.5.5.8.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the active TCI state switch delay requirement defined in clause 8.10.3 Supported test configurations are shown in Table A.5.5.8.2.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) as given in Table A.5.5.8.2.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell is specified in Table A.5.5.8.2.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.5.5.8.2.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE is configured with 1 TCI state for PSCell, PDCCH-TCI-state0 (QCL'd to SSB0)
- UE is indicated in TCI state0 as the active TCI state

The test consists of two time periods, T1 and T2. During T1 only SSB to which TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI-state0 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280 ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a RRC command indicating a switch to TCI-state1.

The test equipment verifies the TCI state switch time in PSCell by scheduling the UE on TCI state 1 after $n + T_{\text{RRC_processing}} + T_{\text{first-SSB}} + 2\text{ms}$.

Table A.5.5.8.2.1.1-1: Supported test configurations

| Config | Description |
|--|---|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note 1: The UE is only required to be tested in one of the supported test configurations | |

Table A.5.5.8.2.1.1-2: General test parameters for TCI state switch

| Parameter | Unit | Value | Comment |
|---|------|--------|--|
| E-UTRA RF Channel Number | | 1 | One E-UTRA radio channel is used for this test |
| NR RF Channel Number | | 2 | One NR radio channel is used for this test |
| Active PCell | | Cell 1 | PCell on RF channel number 1. |
| Active PSCell | | Cell 2 | PSCell on RF channel number 2. |
| CP length | | Normal | |
| DRX | | OFF | For both PCell and PSCell |
| Cell-individual offset for cells on RF channel number 1 | dB | 0 | Individual offset for cells on PCC. |
| Cell-individual offset for cells on RF channel number 2 | dB | 0 | Individual offset for cells on PSCC. |
| Cell2 timing offset to cell1 | μs | 3 | Synchronous EN-DC |
| T1 | s | [0,2] | |
| T2 | s | [0,2] | |

Table A.5.5.8.2.1.1-3: NR Cell specific test parameters for TCI state switch

| Parameter | Unit | Cell 2 |
|---|------|--------------------------|
| Frequency Range | | FR2 |
| Duplex mode | | TDD |
| TDD configuration | | TDDConf.3.1 |
| $BW_{channel}$ | | 100 MHz: $N_{RB,c} = 66$ |
| Initial DL BWP Configuration | | DLBWP.0.2 |
| Dedicated DL BWP Configuration | | DLBWP.1.1 |
| Initial UL BWP Configuration | | ULBWP.0.2 |
| Dedicated UL BWP Configuration | | ULBWP.1.1 |
| PDSCH Reference measurement channel | | SR.3.1 TDD |
| RMSI CORESET parameters | | CR.3.1 TDD |
| Dedicated CORESET parameters | | CCR.3.1 TDD |
| OCNG Patterns | | OP.1 |
| SSB Configuration | | SSB.1 FR2 |
| SMTC Configuration | | SMTC.1 |
| TCI State 0 | | TC.State.0 |
| TCI State 1 | | TCI.State.1 |
| TRS Configuration | | TRS.2.1 TDD |
| Correlation Matrix and Antenna Configuration | | 1x2 Low |
| EPRE ratio of PSS to SSS | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | |
| EPRE ratio of PBCH to PBCH DMRS | | |
| EPRE ratio of PDCCH DMRS to SSS | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | |
| EPRE ratio of PDSCH DMRS to SSS | | |
| EPRE ratio of PDSCH to PDSCH | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | |
| Propagation Condition | | AWGN |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | |

Table A.5.5.8.2.1.1-4: OTA related test parameters for TCI state switch

| Parameter | Unit | Cell 2 | | | |
|---------------------------------|--|--------------------------------------|-------|-----------|-------|
| | | SSB0 | | SSB1 | |
| | | T1 | T2 | T1 | T2 |
| Angle of arrival configuration | | Setup 3 according to clause A.3.15.3 | | | |
| | | AoA1 | | AoA2 | |
| N_{oc} ^{Note 1} | dBm/15 kHz | [-92.1] | | | |
| N_{oc} ^{Note 1} | dBm/SCS | [-83.1] | | | |
| \bar{E}_s/N_{oc} | dB | 1 | 1 | -Infinity | 1 |
| SS-RSRP ^{Note 2} | dBm/120 kHz ^{Note 3} | -82.1 | -82.1 | -Infinity | -82.1 |
| I_o ^{Note 2, Note 6} | dBm/95.04 MHz ^{Note 4} | -54.9 | -54.9 | -54.9 | -54.9 |
| Note 1: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | |
| Note 2: | SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | |
| Note 3: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | | |
| Note 4: | Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone | | | | |
| Note 5: | As observed with 0dBi gain antenna at the center of the quiet zone. | | | | |

A.5.5.8.2.1.2 Test Requirements

During T2, UE shall send L1-RSRP report with both SSB0 and SSB1.

After receiving RRC command in slot n , UE shall be able to start receiving on TCI state 1 after $n + T_{RRC_processing} + T_{first-SSB} + 2ms$.

A.5.6 Measurement procedure

A.5.6.1 Intra-frequency Measurements

A.5.6.1.1 EN-DC event triggered reporting test without gap under non-DRX

A.5.6.1.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.5.6.1.1.1-1.

Table A.5.6.1.1.1-1: supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations. |

There are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.5.6.1.1.1-2, A.5.6.1.1.1-3 and A.5.6.1.1.1-4 below.

In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

Table A.5.6.1.1.1-2: General test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 without gap without DRX

| Parameter | Unit | Config | Value | Comment |
|---------------------------------------|------|--------|---|---|
| Active cell | | 1~4 | E-UTRAN PCell (Cell 1) PSCell (Cell 2) | |
| Neighbour cell | | 1~4 | Cell 3 | Cell to be identified. |
| RF Channel Number | | 1~4 | 1: Cell 1 2: Cell 2 and Cell 3 | One TDD carrier frequency is used for the NR cells and one TDD or FDD carrier frequency is used for E-UTRAN cell. |
| SMTC configuration | | 1~4 | SMTC.1 | |
| A3-Offset | dB | 1~4 | -6 | |
| CP length | | 1~4 | Normal | |
| Hysteresis | dB | 1~4 | 0 | |
| Time To Trigger | s | 1~4 | 0 | |
| Filter coefficient | | 1~4 | 0 | L3 filtering is not used |
| DRX | | 1~4 | OFF | |
| Time offset between Cell 1 and Cell 2 | | 1~4 | 3 μ s | Synchronous EN-DC |
| Time offset between Cell 2 and Cell 3 | | 1~4 | 3 μ s | Synchronous cells |
| T1 | s | 1~4 | 5 | |
| T2 | s | 1~4 | 5 | |

Table A.5.6.1.1.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 without gap without DRX

| Parameter | Unit | Config | Cell 2 | | Cell 3 | |
|-----------|------|--------|--------|----|--------|----|
| | | | T1 | T2 | T1 | T2 |

| | | | | |
|-------------------------------------|--|------|------------------------|------------------------|
| TDD configuration | | 1~4 | TDDConf.3.1 | TDDConf.3.1 |
| Initial BWP configuration | | 1~4 | DLBWP.0.1 ULBWP.0.1 | DLBWP.0.1 ULBWP.0.1 |
| Active DL BWP configuration | | 1~4 | DLBWP.1.1 | DLBWP.1.1 |
| Active UL BWP configuration | | 1~4 | ULBWP.1.1 | ULBWP.1.1 |
| RLM-RS | | 1~4 | SSB | SSB |
| PDSCH RMC configuration | | 1~4 | SR.3.1 TDD | N/A |
| RMSI CORESET RMC configuration | | 1~4 | CR.3.1 TDD | CR.3.1 TDD |
| Dedicated CORESET RMC configuration | | 1~4 | CCR.3.1 TDD | CCR.3.1 TDD |
| OCNG Patterns | | 1~4 | OP.1 | OP.1 |
| TRS configuration | | 1~4 | TRS.2.1 TDD | N/A |
| PDSCH/PDCCH TCI state | | 1~4 | TCI.State.2 | N/A |
| SSB configuration | | 1, 2 | SSB.1 FR2 | SSB.1 FR2 |
| | | 3, 4 | SSB.2 FR2 | SSB.2 FR2 |
| Propagation Condition | | 1~4 | AWGN | |

Table A.5.6.1.1.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 without gap without DRX

| Parameter | Unit | Config | Cell 2 | | Cell 3 | |
|----------------------------|--|--------|-----------------------------|-----|-----------|-----|
| | | | T1 | T2 | T1 | T2 |
| AoA setup | | 1~4 | Setup 3 defined in A.3.15.3 | | | |
| | | | AoA1 | | AoA2 | |
| \hat{E}_s / I_{ot} | dB | 1~4 | 4 | 4 | -Infinity | 8 |
| N_{oc} ^{Note 2} | dBm/15 KHz | 1~4 | -102 | | | |
| N_{oc} ^{Note 2} | dBm/SCS | 1, 2 | -93 | | | |
| | | 3, 4 | -90 | | | |
| SS-RSRP | dBm/SCS | 1, 2 | -89 | -89 | -Infinity | -85 |
| | | 3, 4 | -86 | -86 | -Infinity | -82 |
| \hat{E}_s / N_{oc} | dB | 1~4 | 4 | 4 | -Infinity | 8 |
| I_o | dBm/95.04MHz | 1~4 | -58.56 | | -55.38 | |
| Note 1: | The resources for uplink transmission are assigned to the UE prior to the start of time period T2. | | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | |
| Note 3: | SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | |

A.5.6.1.1.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 2.4s for a UE supporting power class 1,
- 1.44s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times T_{TTIDCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.1.2 EN-DC event triggered reporting test without gap under DRX

A.5.6.1.2.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.5.6.1.2.1-1.

Table A.5.6.1.2.1-1: supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations. |

There are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.5.6.1.2.1-2 ~ Table A.5.6.1.2.1-6 below.

In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.5.6.1.2.1-2: General test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 without gap with DRX

| Parameter | Unit | Config | Value | | Comment |
|-----------|------|--------|--------|--------|---------|
| | | | Test 1 | Test 2 | |

| | | | | | |
|---------------------------------------|----|-----|---|-------|---|
| Active cell | | 1~4 | E-UTRAN PCell (Cell 1) PSCell (Cell 2) | | |
| Neighbour cell | | 1~4 | Cell 3 | | Cell to be identified. |
| RF Channel Number | | 1~4 | 1: Cell 1 2: Cell 2 and Cell 3 | | One TDD carrier frequency is used for the NR cells and one TDD or FDD carrier frequency is used for E-UTRAN cell. |
| SMTC configuration | | 1~4 | SMTC.1 | | |
| A3-Offset | dB | 1~4 | -6 | | |
| CP length | | 1~4 | Normal | | |
| Hysteresis | dB | 1~4 | 0 | | |
| Time To Trigger | s | 1~4 | 0 | | |
| Filter coefficient | | 1~4 | 0 | | L3 filtering is not used |
| DRX | | 1~4 | DRX.1 | DRX.2 | DRX related parameters are defined in Table A.5.6.1.2.1-4 |
| Time offset between Cell 1 and Cell 2 | | 1~4 | 3 μ s | | Synchronous EN-DC |
| Time offset between Cell 2 and Cell 3 | | 1~4 | 3 μ s | | Synchronous cells |
| T1 | s | 1~4 | 5 | | |
| T2 | s | 1~4 | 10 | 52 | |

Table A.5.6.1.2.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 without gap with DRX

| Parameter | Unit | Config | Cell 2 | | Cell 3 | |
|-------------------------------------|------|--------|------------------------|----|------------------------|----|
| | | | T1 | T2 | T1 | T2 |
| TDD configuration | | 1~4 | TDDConf.3.1 | | TDDConf.3.1 | |
| Initial BWP configuration | | 1~4 | DLBWP.0.1 ULBWP.0.1 | | DLBWP.0.1 ULBWP.0.1 | |
| Active DL BWP configuration | | 1~4 | DLBWP.1.1 | | DLBWP.1.1 | |
| Active UL BWP configuration | | 1~4 | ULBWP.1.1 | | ULBWP.1.1 | |
| RLM-RS | | 1~4 | SSB | | SSB | |
| PDSCH RMC configuration | | 1~4 | SR.3.1 TDD | | N/A | |
| RMSI CORESET RMC configuration | | 1~4 | CR.3.1 TDD | | CR.3.1 TDD | |
| Dedicated CORESET RMC configuration | | 1~4 | CCR.3.1 TDD | | CCR.3.1 TDD | |
| OCNG Patterns | | 1~4 | OP.1 | | OP.1 | |
| PDSCH/PDCCH TCI state | | 1~4 | TCI.State.2 | | N/A | |
| TCI state | | 1~4 | CSI-RS.Config.0 | | N/A | |
| SSB configuration | | 1, 2 | SSB.1 FR2 | | SSB.1 FR2 | |
| | | 3, 4 | SSB.2 FR2 | | SSB.2 FR2 | |
| Propagation Condition | | 1~4 | AWGN | | | |

Table A.5.6.1.2.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 without gap with DRX

| Parameter | Unit | Config | Cell 2 | | Cell 3 | |
|---|--------------|--------|-----------------------------|--------|-----------|--------|
| | | | T1 | T2 | T1 | T2 |
| AoA setup | | 1~4 | Setup 1 defined in A.3.15.1 | | | |
| \hat{E}_s/I_{ot} | dB | 1~4 | 4 | -1.46 | -Infinity | -1.46 |
| N_{oc} Note 2 | dBm/15 KHz | 1~4 | -98 | | | |
| N_{oc} Note 2 | dBm/SCS | 1, 2 | -89 | | | |
| | | 3, 4 | -86 | | | |
| SS-RSRP | dBm/SCS | 1, 2 | -85 | -85 | -Infinity | -85 |
| | | 3, 4 | -82 | -82 | -Infinity | -82 |
| \hat{E}_s/N_{oc} | dB | 1~4 | 4 | 4 | -Infinity | 4 |
| I_o | dBm/95.04MHz | 1, 2 | -54.56 | -52.21 | -54.56 | -52.21 |
| <p>Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | |

A.5.6.1.2.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 7.2s for a UE supporting power class 1,
- 4.32s for a UE supporting power class 2, 3 and 4

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 51.2s for a UE supporting power class 1,
- 30.72s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.1.3 EN-DC event triggered reporting test with per-UE gaps under non-DRX

A.5.6.1.3.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.5.6.1.3.1-1.

Table A.5.6.1.3.1-1: supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations. |

There are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.5.6.1.3.1-2 ~ 4 below.

There are two BWPs configured in Cell 2, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 2. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

Table A.5.6.1.3.1-2: General test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 with per-UE gaps without DRX

| Parameter | Unit | Config | Value | Comment |
|--|------|--------|--|---|
| Active cell | | 1~4 | E-UTRAN PCell (Cell 1) PSCell (Cell 2) | |
| Neighbour cell | | 1~4 | Cell 3 | Cell to be identified. |
| RF Channel Number | | 1~4 | 1: Cell 1 2: Cell 2 and Cell 3 | One TDD carrier frequency is used for the NR cells and one TDD or FDD carrier frequency is used for E-UTRAN cell. |
| Gap type | | 1~4 | Per-UE gaps | |
| Measurement gap repetition periodicity | ms | 1~4 | 40 | |
| Measurement gap length | ms | 1~4 | 6 | |
| Measurement gap offset | ms | 1~4 | 39 | |
| SMTTC configuration | | 1~4 | SMTTC.1 | |
| CSI-RS parameters | | 1~4 | CSI-RS.3.2 TDD | |
| A3-Offset | dB | 1~4 | -6 | |
| CP length | | 1~4 | Normal | |
| Hysteresis | dB | 1~4 | 0 | |
| Time To Trigger | s | 1~4 | 0 | |
| Filter coefficient | | 1~4 | 0 | L3 filtering is not used |
| DRX | | 1~4 | OFF | |
| Time offset between Cell 1 and Cell 2 | | 1~4 | 3 μ s | Synchronous EN-DC |
| Time offset between Cell 2 and Cell 3 | | 1~4 | 3 μ s | Synchronous cells |
| T1 | s | 1~4 | 5 | |
| T2 | s | 1~4 | 5 | |

Table A.5.6.1.3.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 with per-UE gaps without DRX

| Parameter | Unit | Config | Cell 2 | | Cell 3 | |
|-----------|------|--------|--------|----|--------|----|
| | | | T1 | T2 | T1 | T2 |
| | | | | | | |

| | | | | |
|-------------------------------------|--|------|------------------------|------------------------|
| TDD configuration | | 1~4 | TDDConf.3.1 | TDDConf.3.1 |
| Initial BWP configuration | | 1~4 | DLBWP.0.1 ULBWP.0.1 | DLBWP.0.1 ULBWP.0.1 |
| Active DL BWP configuration | | 1~4 | DLBWP.1.2 | DLBWP.1.1 |
| Active UL BWP configuration | | 1~4 | ULBWP.1.2 | ULBWP.1.1 |
| RLM-RS | | 1~4 | CSI-RS | SSB |
| PDSCH RMC configuration | | 1~4 | SR.3.1 TDD | N/A |
| RMSI CORESET RMC configuration | | 1~4 | CR.3.1 TDD | CR.3.1 TDD |
| Dedicated CORESET RMC configuration | | 1~4 | CCR.3.1 TDD | CCR.3.1 TDD |
| TRS configuration | | 1~4 | TRS.2.1 TDD | N/A |
| PDSCH/PDCCH TCI state | | 1~4 | TCI.State.2 | N/A |
| OCNG Patterns | | 1~4 | OP.1 | OP.1 |
| SSB | | 1, 2 | SSB.1 FR2 | SSB.1 FR2 |
| | | 3, 4 | SSB.2 FR2 | SSB.2 FR2 |
| Propagation Condition | | 1~4 | AWGN | |

Table A.5.6.1.3.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 with per-UE gaps without DRX

| Parameter | Unit | Config | Cell 2 | | Cell 3 | |
|----------------------------|--|--------|-----------------------------|-----|-----------|-----|
| | | | T1 | T2 | T1 | T2 |
| AoA setup | | 1~4 | Setup 3 defined in A.3.15.3 | | | |
| | | | AoA1 | | AoA2 | |
| \hat{E}_s/I_{ot} | dB | 1~4 | 4 | 4 | -Infinity | 8 |
| N_{oc} ^{Note 2} | dBm/15 KHz | 1~4 | -102 | | | |
| N_{oc} ^{Note 2} | dBm/SCS | 1, 2 | -93 | | | |
| | | 3, 4 | -90 | | | |
| SS-RSRP | dBm/SCS | 1, 2 | -89 | -89 | -Infinity | -85 |
| | | 3, 4 | -86 | -86 | -Infinity | -82 |
| \hat{E}_s/N_{oc} | dB | 3, 4 | 4 | 4 | -Infinity | 8 |
| I_o | dBm/95.04MHz | 1~4 | -58.56 | | -55.38 | |
| Note 1: | The resources for uplink transmission are assigned to the UE prior to the start of time period T2. | | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | |
| Note 3: | SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | |

A.5.6.1.3.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 3.2s for a UE supporting power class 1,
- 1.92s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.1.4 EN-DC event triggered reporting test with per-UE gaps under DRX

A.5.6.1.4.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.5.6.1.4.1-1.

Table A.5.6.1.4.1-1: supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations. |

There are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.5.6.1.4.1-2 ~ 6.

During the test, Cell 2 and Cell 3 are transmitted from the direction determined according to A3.8.

There are two BWPs configured in Cell 2, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 2. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.5.6.1.4.1-2: General test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 with per-UE gaps with DRX

| Parameter | Unit | Config | Value | | Comment |
|-----------|------|--------|--------|--------|---------|
| | | | Test 1 | Test 2 | |

| | | | | | |
|--|----|-----|---|-------|---|
| Active cell | | 1~4 | E-UTRAN PCell (Cell 1) PSCell (Cell 2) | | |
| Neighbour cell | | 1~4 | Cell 3 | | Cell to be identified. |
| RF Channel Number | | 1~4 | 1: Cell 1 2: Cell 2 and Cell 3 | | One TDD carrier frequency is used for the NR cells and one TDD or FDD carrier frequency is used for E-UTRAN cell. |
| Gap type | | 1~4 | Per-UE gaps | | |
| Measurement gap repetition periodicity | ms | 1~4 | 40 | | |
| Measurement gap length | ms | 1~4 | 6 | | |
| Measurement gap offset | ms | 1~4 | 39 | | |
| SMTC configuration | | 1~4 | SMTC.1 | | |
| CSI-RS parameters | | 1~4 | CSI-RS.3.2 TDD | | |
| A3-Offset | dB | 1~4 | -6 | | |
| CP length | | 1~4 | Normal | | |
| Hysteresis | dB | 1~4 | 0 | | |
| Time To Trigger | s | 1~4 | 0 | | |
| Filter coefficient | | 1~4 | 0 | | L3 filtering is not used |
| DRX | | 1~4 | DRX.1 | DRX.2 | DRX related parameters are defined in Table A.5.6.1.4.1-5 |
| Time offset between Cell 1 and Cell 2 | | 1~4 | 3 μ s | | Synchronous EN-DC |
| Time offset between Cell 2 and Cell 3 | | 1~4 | 3 μ s | | Synchronous cells |
| T1 | s | 1~4 | 5 | | |
| T2 | s | 1~4 | 10 | 52 | |

Table A.5.6.1.4.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 with per-UE gaps with DRX

| Parameter | Unit | Config | Cell 2 | | Cell 3 | |
|-------------------------------------|------|--------|------------------------|----|------------------------|----|
| | | | T1 | T2 | T1 | T2 |
| TDD configuration | | 1~4 | TDDConf.3.1 | | TDDConf.3.1 | |
| Initial BWP configuration | | 1~4 | DLBWP.0.1 ULBWP.0.1 | | DLBWP.0.1 ULBWP.0.1 | |
| Active DL BWP configuration | | 1~4 | DLBWP.1.2 | | DLBWP.1.1 | |
| Active UL BWP configuration | | 1~4 | ULBWP.1.2 | | ULBWP.1.1 | |
| RLM-RS | | 1~4 | CSI-RS | | SSB | |
| PDSCH RMC configuration | | 1~4 | SR.3.1 TDD | | N/A | |
| RMSI CORESET RMC configuration | | 1~4 | CR.3.1 TDD | | CR.3.1 TDD | |
| Dedicated CORESET RMC configuration | | 1~4 | CCR.3.1 TDD | | CCR.3.1 TDD | |
| TRS configuration | | 1~4 | TRS.2.1 TDD | | N/A | |
| PDSCH/PDCCH TCI state | | 1~4 | TCI.State.2 | | N/A | |
| OCNG Patterns | | 1~4 | OP.1 | | OP.1 | |
| SSB | | 1, 2 | SSB.1 FR2 | | SSB.1 FR2 | |
| | | 3, 4 | SSB.2 FR2 | | SSB.2 FR2 | |

| | | | |
|-----------------------|--|-----|------|
| Propagation Condition | | 1~4 | AWGN |
|-----------------------|--|-----|------|

Table A.5.6.1.4.1-4: NR Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 with per-UE gaps with DRX

| Parameter | Unit | Config | Cell 2 | | Cell 3 | |
|---|--------------|--------|-----------------------------|--------|-----------|--------|
| | | | T1 | T2 | T1 | T2 |
| AoA setup | | 1~4 | Setup 1 defined in A.3.15.1 | | | |
| \hat{E}_s / I_{ot} | dB | 1~4 | 4 | -1.46 | -Infinity | -1.46 |
| N_{oc} Note 2 | dBm/15 KHz | 1~4 | -98 | | | |
| N_{oc} Note 2 | dBm/SCS | 1, 2 | -89 | | | |
| | | 3, 4 | -86 | | | |
| SS-RSRP | dBm/SCS | 1, 2 | -85 | -85 | -Infinity | -85 |
| | | 3, 4 | -82 | -82 | -Infinity | -82 |
| \hat{E}_s / N_{oc} | dB | 1~4 | 4 | 4 | -Infinity | 4 |
| I_o | dBm/95.04MHz | 1, 2 | -54.56 | -52.21 | -54.56 | -52.21 |
| <p>Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | |

Table A.5.6.1.4.1-5: Void

Table A.5.6.1.4.1-6: Void

A.5.6.1.4.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 7.2s for a UE supporting power class 1,
- 4.32s for a UE supporting power class 2, 3 and 4

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 51.20s for a UE supporting power class 1,
- 30.72s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.2 Inter-frequency Measurements

A.5.6.2.1 EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is not used

A.5.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR2 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.2.1.1-1, A.5.6.2.1.1-2, and A.5.6.2.1.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.5.6.2.1.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #13 as defined in Table A.5.6.2.1.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.2-1. Supported test configurations are shown in table A.5.6.2.1.1-1.

Table A.5.6.2.1.1-1 EN-DC event triggered reporting tests without SSB index reading for FR2-FR2

| Config | Description |
|---------|--|
| 1 | LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note 1: | The UE is only required to be tested in one of the supported test configurations |
| Note 2: | target NR cell has the same SCS, BW and duplex mode as NR serving cell |

Table A.5.6.2.1.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

| Parameter | Unit | Test configuration | Value | | Comment |
|---|------|--------------------|---|----------------------------------|---|
| | | | Test 1 | Test 2 | |
| E-UTRA RF Channel Number | | Config 1,2 | 1 | | One E-UTRAN TDD carrier frequencies is used. |
| NR RF Channel Number | | Config 1,2 | 1, 2 | | Two FR1 NR carrier frequencies is used. |
| Active cell | | Config 1,2 | LTE Cell 1 (PCell) and NR cell 2 (PScell) | | LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1. |
| Neighbour cell | | Config 1,2 | NR cell 3 | | NR cell 3 is on NR RF channel number 2. |
| Gap Pattern Id | | Config 1,2 | 0 | 13 | As specified in clause 9.1.2-1. |
| Measurement gap offset | | Config 1,2 | 39 | 39 | |
| SMTC-SSB parameters | | Config 1,2 | SSB.1 FR2 | | As specified in clause A.3.10.2 |
| A3-Offset | dB | Config 1,2 | [-30] | | |
| Hysteresis | dB | Config 1,2 | 0 | | |
| CP length | | Config 1,2 | Normal | | |
| TimeToTrigger | s | Config 1,2 | 0 | | |
| Filter coefficient | | Config 1,2 | 0 | | L3 filtering is not used |
| DRX | | Config 1,2 | OFF | | DRX is not used |
| Time offset between PCell and PScell | | Config 1,2 | 3 μ s | | Synchronous EN-DC |
| Time offset between serving and neighbour cells | | Config 1,2 | 3 μ s | | Synchronous cells. |
| T1 | s | Config 1,2 | 5 | | |
| T2 | s | Config 1,2 | 5.2 for PC1; 3.5 for other PC | 5.2 for PC1; 3.5 for other PC | |

Table A.5.6.2.1.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

| Parameter | Unit | Test configuration | Cell 2 | | Cell 3 | |
|-----------------------|------|--------------------|---------------------------------------|----|-----------------------------|----|
| | | | T1 | T2 | T1 | T2 |
| AoA setup | | Config 1,2 | Setup 3 as specified in clause A.3.15 | | | |
| | | | AoA1 | | AoA2 | |
| NR RF Channel Number | | Config 1,2 | 1 | | 2 | |
| Duplex mode | | Config 1,2 | TDD | | TDD | |
| BW _{channel} | MHz | Config 1,2 | 100: N _{RB,c} = 66 | | 100: N _{RB,c} = 66 | |
| BWP BW | MHz | Config 1,2 | 100: N _{RB,c} = 66 | | 100: N _{RB,c} = 66 | |
| TDD configuration | | Config 1,2 | TDDConf.3.1 | | TDDConf.3.1 | |
| Initial DL BWP | | Config 1,2 | DLBWP.0.1 | | NA | |
| Initial UL BWP | | Config 1,2 | ULBWP.0.1 | | NA | |

| | | | | | | | |
|---|-------------------------|------------|-----------------|--------|-----------|-----|--|
| Dedicated DL BWP | | Config 1,2 | DLBWP.1.1 | NA | | | |
| Dedicated UL BWP | | Config 1,2 | ULBWP.1.1 | NA | | | |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | Config 1,2 | OP.1 | OP.1 | | | |
| TRS configuration | | Config 1,2 | TRS.2.1 TDD | NA | | | |
| TCI configuration | | Config 1,2 | CSI-RS.Config.0 | NA | | | |
| PDSCH Reference measurement channel | | Config 1,2 | SR.3.1 TDD | - | | | |
| CORESET Reference Channel | | Config 1,2 | CR.3.1 TDD | - | | | |
| SMTC configuration defined in A.3.11 | | Config 1,2 | SMTC.1 | SMTC.1 | | | |
| PDSCH/PDCCH subcarrier spacing | kHz | Config 1,2 | 120 | 120 | | | |
| EPRE ratio of PSS to SSS | | Config 1,2 | 0 | 0 | | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | | |
| N_{oc} ^{Note2} | dBm/15 kHz Note5 | | NA | | NA | | |
| N_{oc} ^{Note2} | dBm/S CS Note4 | Config 1,2 | NA | | NA | | |
| SS-RSRP ^{Note 3} | dBm/S CS Note5 | Config 1,2 | -87 | -87 | -Infinity | -87 | |
| \hat{E}_s / I_{ot} | dB | Config 1,2 | NA | NA | -Infinity | NA | |
| \hat{E}_s / N_{oc} | dB | Config 1,2 | NA | NA | -Infinity | NA | |
| I_o ^{Note3} | dBm/95 .04 MHz Note5 | Config 1,2 | -87 | -87 | -Infinity | -87 | |
| Propagation Condition | | Config 1,2 | AWGN | | | | |

| | |
|---------|--|
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. |
| Note 3: | SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. |
| Note 4: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. |
| Note 5: | Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone |
| Note 6: | As observed with 0dBi gain antenna at the centre of the quiet zone |

A.5.6.2.1.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

5120 for UE supporting power class 1, or

3200 for UE supporting other power class.

In test 1 and 2 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCC}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCC.

A.5.6.2.2 EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is used

A.5.6.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR2 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.2.2.1-1, A.5.6.2.2.1-2, and A.5.6.2.2.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.5.6.2.2.1-2 is provided for UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #13 as defined in Table A.5.6.2.2.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.2-1. Supported test configurations are shown in table A.5.6.2.2.1-1.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.5.6.2.2.1-1 EN-DC event triggered reporting tests without SSB index reading for FR2-FR2

| Config | Description |
|--|--|
| 1 | LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note 1: The UE is only required to be tested in one of the supported test configurations | |
| Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell | |

Table A.5.6.2.2.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

| Parameter | Unit | Test configuration | Value | | | | Comment |
|---|------|--------------------|---|--------------------------------|------------------------------|--------------------------------|---|
| | | | Test 1 | Test 2 | Test 3 | Test 4 | |
| E-UTRA RF Channel Number | | Config 1,2 | 1 | | | | One E-UTRAN TDD carrier frequencies is used. |
| NR RF Channel Number | | Config 1,2 | 1, 2 | | | | Two FR1 NR carrier frequencies is used. |
| Active cell | | Config 1,2 | LTE Cell 1 (PCell) and NR cell 2 (PScell) | | | | LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1. |
| Neighbour cell | | Config 1,2 | NR cell 3 | | | | NR cell 3 is on NR RF channel number 2. |
| Gap Pattern Id | | Config 1,2 | 0 | | 13 | | As specified in clause 9.1.2-1. |
| Measurement gap offset | | Config 1,2 | 39 | | 39 | | |
| SMTC-SSB parameters | | Config 1,2 | SSB.1 FR2 | | | | As specified in clause A.3.10.2 |
| A3-Offset | dB | Config 1,2 | -6 | | | | |
| Hysteresis | dB | Config 1,2 | 0 | | | | |
| CP length | | Config 1,2 | Normal | | | | |
| TimeToTrigger | s | Config 1,2 | 0 | | | | |
| Filter coefficient | | Config 1,2 | 0 | | | | L3 filtering is not used |
| DRX | | Config 1,2 | DRX .1 | DRX .2 | DRX .1 | DRX .2 | As specified in clause A.3.3 |
| Time offset between PCell and PScell | | Config 1,2 | 3 μs | | | | Synchronous EN-DC |
| Time offset between serving and neighbour cells | | Config 1,2 | 3μs | | | | Synchronous cells. |
| T1 | s | Config 1,2 | 5 | | | | |
| T2 | s | Config 1,2 | 8 for PC1; 5 for other PC | 82 for PC1; 52 for other PC | 8 for PC1; 5 for other PC | 82 for PC1; 52 for other PC | |

Table A.5.6.2.2.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

| Parameter | Unit | Test configuration | Cell 2 | | Cell 3 | |
|-----------|------|--------------------|--------|----|--------|----|
| | | | T1 | T2 | T1 | T2 |
| | | | | | | |

| | | | | | | |
|---|---------------------|------------|---------------------------------------|-------|----------------------|-------|
| AoA setup | | Config 1,2 | Setup 1 as specified in clause A.3.15 | | | |
| NR RF Channel Number | | Config 1,2 | 1 | | 2 | |
| Duplex mode | | Config 1,2 | TDD | | TDD | |
| BW_{channel} | MHz | Config 1,2 | 100: $N_{RB,c} = 66$ | | 100: $N_{RB,c} = 66$ | |
| BWP BW | MHz | Config 1,2 | 100: $N_{RB,c} = 66$ | | 100: $N_{RB,c} = 66$ | |
| TDD configuration | | Config 1,2 | TDDConf.3.1 | | TDDConf.3.1 | |
| Initial DL BWP | | Config 1,2 | DLBWP.0.1 | | NA | |
| Initial UL BWP | | Config 1,2 | ULBWP.0.1 | | | |
| Dedicated DL BWP | | Config 1,2 | DLBWP.1.1 | | NA | |
| Dedicated UL BWP | | Config 1,2 | ULBWP.1.1 | | NA | |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | Config 1,2 | OP.1 | | OP.1 | |
| TRS configuration | | Config 1,2 | TRS.2.1 TDD | | NA | |
| TCI configuration | | Config 1,2 | CSI-RS.Config.0 | | NA | |
| PDSCH Reference measurement channel | | Config 1,2 | SR.3.1 TDD | | - | |
| CORESET Reference Channel | | Config 1,2 | CR.3.1 TDD | | - | |
| SMTTC configuration defined in A.3.11 | | Config 1,2 | SMTTC.1 | | SMTTC.1 | |
| PDSCH/PDCCH subcarrier spacing | kHz | Config 1,2 | 120 | | 120 | |
| EPRE ratio of PSS to SSS | | Config 1,2 | 0 | | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | |
| N_{oc} ^{Note2} | dBm/15 kHz Note5 | | -104.7 | | -104.7 | |
| N_{oc} ^{Note2} | dBm/S CS Note4 | Config 1,2 | -95.7 | | -95.7 | |
| SS-RSRP ^{Note 3} | dBm/S CS Note5 | Config 1,2 | -89.7 | -89.7 | -Infinity | -86.7 |
| \hat{E}_s / I_{ot} | dB | Config 1,2 | 6 | 6 | -Infinity | 9 |

| | | | | | | |
|--|-------------------------------|------------|-------|-------|-----------|-------|
| \hat{E}_s / N_{oc} | dB | Config 1,2 | 6 | 6 | -Infinity | 9 |
| I_o ^{Note3} | dBm/95 .04 MHz Note5 | Config 1,2 | -59.7 | -59.7 | -66.7 | -57.2 |
| Propagation Condition | | Config 1,2 | AWGN | | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone</p> <p>Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone</p> | | | | | | |

A.5.6.2.2.2 Test Requirements

In test 1 with per-UE gap and in test 3 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

7680 for UE supporting power class 1, or

4800 for UE supporting other power class.

In test 2 with per-UE gap and in test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

81920 for UE supporting power class 1, or

51200 for UE supporting other power class.

In test 1, 2, 3 and 4 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.2.3 EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is not used

A.5.6.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR2 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.2.3.1-1, A.5.6.2.3.1-2, and A.5.6.2.3.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.5.6.2.3.1-1 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #13 as defined in Table A.5.6.2.3.1-1 is

provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.2-1. Supported test configurations are shown in table A.5.6.2.3.1-1.

Table A.5.6.2.3.1-1 EN-DC event triggered reporting tests with SSB index reading for FR2-FR2

| Config | Description |
|--|--|
| 1 | LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note 1: The UE is only required to be tested in one of the supported test configurations | |
| Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell | |

Table A.5.6.2.3.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

| Parameter | Unit | Test configuration | Value | | Comment |
|---|------|--------------------|---|--------------------------------|---|
| | | | Test 1 | Test 2 | |
| E-UTRA RF Channel Number | | Config 1,2 | 1 | | One E-UTRAN TDD carrier frequencies is used. |
| NR RF Channel Number | | Config 1,2 | 1, 2 | | Two FR1 NR carrier frequencies is used. |
| Active cell | | Config 1,2 | LTE Cell 1 (PCell) and NR cell 2 (PScell) | | LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1. |
| Neighbour cell | | Config 1,2 | NR cell 3 | | NR cell 3 is on NR RF channel number 2. |
| Gap Pattern Id | | Config 1,2 | 0 | 13 | As specified in clause 9.1.2-1. |
| Measurement gap offset | | Config 1,2 | 39 | 39 | |
| SMTC-SSB parameters | | Config 1,2 | SSB.1 FR2 | | As specified in clause A.3.10.2 |
| A3-Offset | dB | Config 1,2 | [-30] | | |
| Hysteresis | dB | Config 1,2 | 0 | | |
| CP length | | Config 1,2 | Normal | | |
| TimeToTrigger | s | Config 1,2 | 0 | | |
| Filter coefficient | | Config 1,2 | 0 | | L3 filtering is not used |
| DRX | | Config 1,2 | OFF | | DRX is not used |
| Time offset between PCell and PScell | | Config 1,2 | 3 μ s | | Synchronous EN-DC |
| Time offset between serving and neighbour cells | | Config 1,2 | 3 μ s | | Synchronous cells. |
| T1 | s | Config 1,2 | 5 | | |
| T2 | s | Config 1,2 | 7 for PC1; 4.5 for other PC | 7 for PC1; 4.5 for other PC | |

Table A.5.6.2.3.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

| Parameter | Unit | Test configuration | Cell 2 | | Cell 3 | |
|---|---------------------|--------------------|---------------------------------------|----|-----------------------------|----|
| | | | T1 | T2 | T1 | T2 |
| AoA setup | | Config 1,2 | Setup 3 as specified in clause A.3.15 | | | |
| | | | AoA1 | | AoA2 | |
| NR RF Channel Number | | Config 1,2 | 1 | | 2 | |
| Duplex mode | | Config 1,2 | TDD | | TDD | |
| BW _{channel} | MHz | Config 1,2 | 100: N _{RB,c} = 66 | | 100: N _{RB,c} = 66 | |
| BWP BW | MHz | Config 1,2 | 100: N _{RB,c} = 66 | | 100: N _{RB,c} = 66 | |
| TDD configuration | | Config 1,2 | TDDConf.3.1 | | TDDConf.3.1 | |
| Initial DL BWP | | Config 1,2 | DLBWP.0.1 | | NA | |
| Initial UL BWP | | Config 1,2 | DLBWP.0.1 | | | |
| Dedicated DL BWP | | Config 1,2 | DLBWP.1.1 | | NA | |
| Dedicated UL BWP | | Config 1,2 | ULBWP.1.1 | | NA | |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | Config 1,2 | OP.1 | | OP.1 | |
| PDSCH Reference measurement channel | | Config 1,2 | SR.3.1 TDD | | - | |
| CORESET Reference Channel | | Config 1,2 | CR.3.1 TDD | | - | |
| TRS configuration | | Config 1,2 | TRS.2.1 TDD | | NA | |
| TCI configuration | | Config 1,2 | CSI-RS.Config.0 | | NA | |
| SMTc configuration defined in A.3.11 | | Config 1,2 | SMTc.1 | | SMTc.1 | |
| PDSCH/PDCCH subcarrier spacing | kHz | Config 1,2 | 120 | | 120 | |
| EPRE ratio of PSS to SSS | | Config 1,2 | 0 | | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | NA | | NA | |
| N_{oc} ^{Note2} | dBm/15 kHz Note5 | | NA | | NA | |

| | | | | | | |
|--|-------------------------------|------------|------|-----|-----------|-----|
| N_{oc} ^{Note2} | dBm/S CS Note4 | Config 1,2 | NA | | NA | |
| SS-RSRP ^{Note3} | dBm/S CS Note5 | Config 1,2 | -87 | -87 | -Infinity | -87 |
| \hat{E}_s / I_{ot} | dB | Config 1,2 | NA | NA | -Infinity | NA |
| \hat{E}_s / N_{oc} | dB | Config 1,2 | NA | NA | -Infinity | NA |
| I_o ^{Note3} | dBm/95 .04 MHz Note5 | Config 1,2 | -87 | -87 | -Infinity | -87 |
| Propagation Condition | | Config 1,2 | AWGN | | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 5: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone</p> <p>Note 6: As observed with 0dBi gain antenna at the centre of the quiet zone</p> | | | | | | |

A.5.6.2.3.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

6720 for UE supporting power class 1, or

4160 for UE supporting other power class.

In test 1 and 2 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCC}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCC.

A.5.6.2.4 EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is used

A.5.6.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR2 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.2.4.1-1, A.5.6.2.4.1-2, and A.5.6.2.4.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.5.6.2.4.1-2 is provided for UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #13 as defined in Table

A.5.6.2.4.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.2-1. Supported test configurations are shown in table A.5.6.2.4.1-1.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.5.6.2.4.1-1: EN-DC event triggered reporting tests with SSB index reading for FR2-FR2

| Config | Description |
|---------------|--|
| 1 | LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note 1: | The UE is only required to be tested in one of the supported test configurations |
| Note 2: | target NR cell has the same SCS, BW and duplex mode as NR serving cell |

Table A.5.6.2.4.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

| Parameter | Unit | Test configuration | Value | | | | Comment |
|---|------|--------------------|---|------------------------------|------------------------------|------------------------------|---|
| | | | Test 1 | Test 2 | Test 3 | Test 4 | |
| E-UTRA RF Channel Number | | Config 1,2 | 1 | | | | One E-UTRAN TDD carrier frequencies is used. |
| NR RF Channel Number | | Config 1,2 | 1, 2 | | | | Two FR1 NR carrier frequencies is used. |
| Active cell | | Config 1,2 | LTE Cell 1 (PCell) and NR cell 2 (PScell) | | | | LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1. |
| Neighbour cell | | Config 1,2 | NR cell 3 | | | | NR cell 3 is on NR RF channel number 2. |
| Gap Pattern Id | | Config 1,2 | 0 | | 13 | | As specified in clause 9.1.2-1. |
| Measurement gap offset | | Config 1,2 | 39 | | 39 | | |
| SMTCS-SSB parameters | | Config 1,2 | SSB.1 FR2 | | | | As specified in clause A.3.10.2 |
| A3-Offset | dB | Config 1,2 | -6 | | | | |
| Hysteresis | dB | Config 1,2 | 0 | | | | |
| CP length | | Config 1,2 | Normal | | | | |
| TimeToTrigger | s | Config 1,2 | 0 | | | | |
| Filter coefficient | | Config 1,2 | 0 | | | | L3 filtering is not used |
| DRX | | Config 1,2 | DRX .1 | DRX .2 | DRX .1 | DRX .2 | As specified in clause A.3.3 |
| Time offset between PCell and PSCell | | Config 1,2 | 3 μ s | | | | Synchronous EN-DC |
| Time offset between serving and neighbour cells | | Config 1,2 | 3 μ s | | | | Synchronous cells. |
| T1 | s | Config 1,2 | 5 | | | | |
| T2 | s | Config 1,2 | 11 for PC1; 6.5 for other PC | 108 for PC1; 67 for other PC | 11 for PC1; 6.5 for other PC | 108 for PC1; 67 for other PC | |

Table A.5.6.2.4.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

| Parameter | Unit | Test configuration | Cell 2 | | Cell 3 | |
|-----------------------|------|--------------------|---------------------------------------|----|-----------------------------|----|
| | | | T1 | T2 | T1 | T2 |
| AoA setup | | Config 1,2 | Setup 1 as specified in clause A.3.15 | | | |
| NR RF Channel Number | | Config 1,2 | 1 | | 2 | |
| Duplex mode | | Config 1,2 | TDD | | TDD | |
| BW _{channel} | MHz | Config 1,2 | 100: N _{RB,c} = 66 | | 100: N _{RB,c} = 66 | |
| BWP BW | MHz | Config 1,2 | 100: N _{RB,c} = 66 | | 100: N _{RB,c} = 66 | |
| TDD configuration | | Config 1,2 | TDDConf.3.1 | | TDDConf.3.1 | |

| | | | | | | |
|---|-------------------------|------------|-----------------|---------|-----------|-------|
| Initial DL BWP | | Config 1,2 | DLBWP.0.1 | NA | | |
| Initial UL BWP | | Config 1,2 | ULBWP.0.1 | | | |
| Dedicated DL BWP | | Config 1,2 | DLBWP.1.1 | NA | | |
| Dedicated UL BWP | | Config 1,2 | ULBWP.1.1 | NA | | |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | Config 1,2 | OP.1 | OP.1 | | |
| PDSCH Reference measurement channel | | Config 1,2 | SR.3.1 TDD | - | | |
| CORESET Reference Channel | | Config 1,2 | CR.3.1 TDD | - | | |
| TRS configuration | | Config 1,2 | TRS.2.1 TDD | NA | | |
| TCI configuration | | Config 1,2 | CSI-RS.Config.0 | NA | | |
| SMTTC configuration defined in A.3.11 | | Config 1,2 | SMTTC.1 | SMTTC.1 | | |
| PDSCH/PDCCH subcarrier spacing | kHz | Config 1,2 | 120 | 120 | | |
| EPRE ratio of PSS to SSS | | Config 1,2 | 0 | 0 | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | |
| N_{oc}^{Note2} | dBm/15 kHz Note5 | | -104.7 | -104.7 | | |
| N_{oc}^{Note2} | dBm/S CS Note4 | Config 1,2 | -95.7 | -95.7 | | |
| SS-RSRP ^{Note 3} | dBm/S CS Note5 | Config 1,2 | -89.7 | -89.7 | -Infinity | -86.7 |
| \hat{E}_s / I_{ot} | dB | Config 1,2 | 6 | 6 | -Infinity | 9 |
| \hat{E}_s / N_{oc} | dB | Config 1,2 | 6 | 6 | -Infinity | 9 |
| I_o^{Note3} | dBm/95 .04 MHz Note5 | Config 1,2 | -59.7 | -59.7 | -66.7 | -57.2 |
| Propagation Condition | | Config 1,2 | AWGN | | | |

| | |
|---------|--|
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. |
| Note 3: | SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. |
| Note 4: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. |
| Note 5: | Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone |
| Note 6: | As observed with 0dBi gain antenna at the centre of the quiet zone |

A.5.6.2.2.4 Test Requirements

In test 1 with per-UE gap and in test 3 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

- 10080 for UE supporting power class 1, or
- 6240 for UE supporting other power class.

In test 2 with per-UE gap and in test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

- 107520 for UE supporting power class 1, or
- 66560 for UE supporting other power class.

In test 1, 2, 3 and 4 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCCH.

A.5.6.2.5 EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is not used

A.5.6.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.2.5.1-1, A.5.6.2.5.1-2, and A.5.6.2.5.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.5.6.2.5.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #13 as defined in Table A.5.6.2.5.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.5.6.2.5.1-1.

Table A.5.6.2.5.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR2

| Config | Description of serving cell | Description of target cell |
|--|---|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | |
| Note: The UE is only required to be tested in one of the supported test configurations | | |

Table A.5.6.2.5.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

| Parameter | Unit | Test configuration | Value | | Comment |
|---|------|--------------------|---|----------------------------------|---|
| | | | Test 1 | Test 2 | |
| E-UTRA RF Channel Number | | Config 1,2,3,4,5,6 | 1 | | One E-UTRAN TDD carrier frequencies is used. |
| NR RF Channel Number | | Config 1,2,3,4,5,6 | 1, 2 | | Two FR1 NR carrier frequencies is used. |
| Active cell | | Config 1,2,3,4,5,6 | LTE Cell 1 (PCell) and NR cell 2 (PScell) | | LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1. |
| Neighbour cell | | Config 1,2,3,4,5,6 | NR cell 3 | | NR cell 3 is on NR RF channel number 2. |
| Gap Pattern Id | | Config 1,2,3,4,5,6 | 0 | 13 | As specified in clause 9.1.2-1. |
| Measurement gap offset | | Config 1,2,3,4,5,6 | 39 | 39 | |
| SMTC-SSB parameters on NR RF Channel 1 | | Config 1,4 | SSB.1 FR1 | | As specified in clause A.3.10.1 |
| | | Config 2,5 | SSB.1 FR1 | | As specified in clause A.3.10.1 |
| | | Config 3,6 | SSB.2 FR1 | | As specified in clause A.3.10.1 |
| SMTC-SSB parameters on NR RF Channel 2 | | Config 1,2,3,4,5,6 | SSB.1 FR2 | | As specified in clause A.3.10.2 |
| <i>offsetMO</i> | dB | Config 1,2,3,4,5,6 | 6 | | |
| Hysteresis | dB | Config 1,2,3,4,5,6 | 0 | | |
| <i>a4-Threshold</i> | dBm | Config 1,2,3,4,5,6 | [-120] | | |
| CP length | | Config 1,2,3,4,5,6 | Normal | | |
| TimeToTrigger | s | Config 1,2,3,4,5,6 | 0 | | |
| Filter coefficient | | Config 1,2,3,4,5,6 | 0 | | L3 filtering is not used |
| DRX | | Config 1,2,3,4,5,6 | OFF | | DRX is not used |
| Time offset between PCell and PSCell | | Config 1,2,3,4,5,6 | 3 μ s | | Synchronous EN-DC |
| Time offset between serving and neighbour cells | | Config 1,4 | 3ms | | Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2. |
| | | Config 2,3,5,6 | 3 μ s | | Synchronous cells. |
| T1 | s | Config 1,2,3,4,5,6 | 5 | | |
| T2 | s | Config 1,2,3,4,5,6 | 5.2 for PC1; 3.5 for other PC | 5.2 for PC1; 3.5 for other PC | |

Table A.5.6.2.5.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

| Parameter | Unit | Test configuration | Cell 2 | | Cell 3 | |
|---|------|--------------------|-----------------------------|----|---------------------------------------|----|
| | | | T1 | T2 | T1 | T2 |
| AoA setup | | Config 1,2,3,4,5,6 | NA | | Setup 1 as specified in clause A.3.15 | |
| NR RF Channel Number | | Config 1,2,3,4,5,6 | 1 | | 2 | |
| Duplex mode | | Config 1,4 | FDD | | TDD | |
| | | Config 2,3,5,6 | TDD | | TDD | |
| BW _{channel} | MHz | Config 1,4 | 10: N _{RB,c} = 52 | | 100: N _{RB,c} = 66 | |
| | | Config 2,5 | 10: N _{RB,c} = 52 | | 100: N _{RB,c} = 66 | |
| | | Config 3,6 | 40: N _{RB,c} = 106 | | 100: N _{RB,c} = 66 | |
| BWP BW | MHz | Config 1,4 | 10: N _{RB,c} = 52 | | 100: N _{RB,c} = 66 | |
| | | Config 2,5 | 10: N _{RB,c} = 52 | | 100: N _{RB,c} = 66 | |
| | | Config 3,6 | 40: N _{RB,c} = 106 | | 100: N _{RB,c} = 66 | |
| TDD configuration | | Config 2,5 | TDDConf.1.1 | | TDDConf.3.1 | |
| | | Config 3,6 | TDDConf.2.1 | | TDDConf.3.1 | |
| Initial DL BWP | | Config 1,2,3,4,5,6 | DLBWP.0.1 | | NA | |
| Initial UL BWP | | Config 1,2,3,4,5,6 | ULBWP.0.1 | | NA | |
| Dedicated DL BWP | | Config 1,2,3,4,5,6 | DLBWP.1.1 | | NA | |
| Dedicated UL BWP | | Config 1,2,3,4,5,6 | ULBWP.1.1 | | NA | |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | Config 1,2,3,4,5,6 | OP.1 | | OP.1 | |
| PDSCH Reference measurement channel | | Config 1,4 | SR.1.1 FDD | | - | |
| | | Config 2,5 | SR.1.1 TDD | | | |
| | | Config 3,6 | SR2.1 TDD | | | |
| CORESET Reference Channel | | Config 1,4 | CR.1.1 FDD | | - | |
| | | Config 2,5 | CR.1.1 TDD | | | |
| | | Config 3,6 | CR2.1 TDD | | | |
| SMTC configuration defined in A.3.11 | | Config 1,4 | SMTC.2 | | SMTC.2 | |
| | | Config 2,3,5,6 | SMTC.1 | | SMTC.1 | |
| PDSCH/PDCCH subcarrier spacing | kHz | Config 1,2,4,5 | 15 | | 120 | |
| | | Config 3,6 | 30 | | 120 | |
| EPRE ratio of PSS to SSS | | Config 1,2,3,4,5,6 | 0 | | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |

| | | | | | |
|--|------------------------|--------------------|------------------------------------|-----------|-----|
| EPRE ratio of PDSCH to PDSCH | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | |
| N_{oc} ^{Note2} | dBm/15 kHz Note5 | | NA Link only, see clause A.3.7A | NA | |
| N_{oc} ^{Note2} | dBm/S CS Note4 | Config 1,2,4,5 | | NA | |
| | | Config 3,6 | | NA | |
| SS-RSRP ^{Note 3} | dBm/S CS Note5 | Config 1,2,4,5 | | -Infinity | -87 |
| | | Config 3,6 | | -Infinity | -87 |
| \hat{E}_s / I_{ot} | dB | Config 1,2,3,4,5,6 | | -Infinity | NA |
| \hat{E}_s / N_{oc} | dB | Config 1,2,3,4,5,6 | | -Infinity | NA |
| I_o ^{Note3} | dBm/9.36MHz | Config 1,2,4,5 | | - | - |
| | dBm/38.16MHz | Config 3,6 | | - | - |
| | dBm/95.04 MHz Note5 | Config 1,2,3,4,5,6 | | -Infinity | -87 |
| Propagation Condition | | Config 1,2,3,4,5,6 | AWGN | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 5: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone</p> <p>Note 6: As observed with 0dBi gain antenna at the centre of the quiet zone</p> | | | | | |

A.5.6.2.5.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

5120 for UE supporting power class 1, or

3200 for UE supporting other power class.

In test 1 and 2 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.2.6 EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is used

A.5.6.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.2.6.1-1, A.5.6.2.6.1-2, and A.5.6.2.6.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.5.6.2.6.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #13 as defined in Table A.5.6.2.6.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.5.6.2.6.1-1.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.5.6.2.6.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR2

| Config | Description of serving cell | Description of target cell |
|--|---|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | |
| Note: The UE is only required to be tested in one of the supported test configurations | | |

Table A.5.6.2.6.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

| Parameter | Unit | Test configuration | Value | | | | Comment |
|--------------------------|------|--------------------|--------|--------|--------|--------|--|
| | | | Test 1 | Test 2 | Test 3 | Test 4 | |
| E-UTRA RF Channel Number | | Config 1,2,3,4,5,6 | 1 | | | | One E-UTRAN TDD carrier frequencies is used. |
| NR RF Channel Number | | Config 1,2,3,4,5,6 | 1, 2 | | | | Two FR1 NR carrier frequencies is used. |

| | | | | | | | |
|---|-----|--------------------|---|--------------------------------|------------------------------|--------------------------------|---|
| Active cell | | Config 1,2,3,4,5,6 | LTE Cell 1 (PCell) and NR cell 2 (PScell) | | | | LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1. |
| Neighbour cell | | Config 1,2,3,4,5,6 | NR cell 3 | | | | NR cell 3 is on NR RF channel number 2. |
| Gap Pattern Id | | Config 1,2,3,4,5,6 | 0 | 13 | | | As specified in clause 9.1.2-1. |
| Measurement gap offset | | Config 1,2,3,4,5,6 | 39 | 39 | | | |
| SMTC-SSB parameters on NR RF Channel 1 | | Config 1,4 | SSB.1 FR1 | | | | As specified in clause A.3.10.1 |
| | | Config 2,5 | SSB.1 FR1 | | | | As specified in clause A.3.10.1 |
| | | Config 3,6 | SSB.2 FR1 | | | | As specified in clause A.3.10.1 |
| SMTC-SSB parameters on NR RF Channel 2 | | Config 1,2,3,4,5,6 | SSB.1 FR2 | | | | As specified in clause A.3.10.2 |
| <i>offsetMO</i> | dB | Config 1,2,3,4,5,6 | 6 | | | | |
| Hysteresis | dB | Config 1,2,3,4,5,6 | 0 | | | | |
| <i>a4-Threshold</i> | dBm | Config 1,2,3,4,5,6 | [-120] | | | | |
| CP length | | Config 1,2,3,4,5,6 | Normal | | | | |
| TimeToTrigger | s | Config 1,2,3,4,5,6 | 0 | | | | |
| Filter coefficient | | Config 1,2,3,4,5,6 | 0 | | | | L3 filtering is not used |
| DRX | | Config 1,2,3,4,5,6 | DRX .1 | DRX .2 | DRX .1 | DRX .2 | As specified in clause A.3.3 |
| Time offset between PCell and PSCell | | Config 1,2,3,4,5,6 | 3 μ s | | | | Synchronous EN-DC |
| Time offset between serving and neighbour cells | | Config 1,4 | 3ms | | | | Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2. |
| | | Config 2,3,5,6 | 3 μ s | | | | Synchronous cells. |
| T1 | s | Config 1,2,3,4,5,6 | 5 | | | | |
| T2 | s | Config 1,2,3,4,5,6 | 8 for PC1; 5 for other PC | 82 for PC1; 52 for other PC | 8 for PC1; 5 for other PC | 82 for PC1; 52 for other PC | |

Table A.5.6.2.6.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

| Parameter | Unit | Test configuration | Cell 2 | | Cell 3 | |
|----------------------|------|--------------------|--------|----|---------------------------------------|----|
| | | | T1 | T2 | T1 | T2 |
| AoA setup | | Config 1,2,3,4,5,6 | NA | | Setup 1 as specified in clause A.3.15 | |
| NR RF Channel Number | | Config 1,2,3,4,5,6 | 1 | | 2 | |

| | | | | |
|---|---------------------|--------------------|------------------------------------|-----------------------------|
| Duplex mode | | Config 1,4 | FDD | TDD |
| | | Config 2,3,5,6 | TDD | TDD |
| BW _{channel} | MHz | Config 1,4 | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 |
| | | Config 2,5 | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 |
| | | Config 3,6 | 40: N _{RB,c} = 106 | 100: N _{RB,c} = 66 |
| BWP BW | MHz | Config 1,4 | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 |
| | | Config 2,5 | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 |
| | | Config 3,6 | 40: N _{RB,c} = 106 | 100: N _{RB,c} = 66 |
| TDD configuration | | Config 2,5 | TDDConf.1.1 | TDDConf.3.1 |
| | | Config 3,6 | TDDConf.2.1 | TDDConf.3.1 |
| Initial DL BWP | | Config 1,2,3,4,5,6 | DLBWP.0.1 | NA |
| Initial UL BWP | | Config 1,2,3,4,5,6 | ULBWP.0.1 | NA |
| Dedicated DL BWP | | Config 1,2,3,4,5,6 | DLBWP.1.1 | NA |
| Dedicated UL BWP | | Config 1,2,3,4,5,6 | ULBWP.1.1 | NA |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | Config 1,2,3,4,5,6 | OP.1 | OP.1 |
| PDSCH Reference measurement channel | | Config 1,4 | SR.1.1 FDD | - |
| | | Config 2,5 | SR.1.1 TDD | |
| | | Config 3,6 | SR2.1 TDD | |
| CORESET Reference Channel | | Config 1,4 | CR.1.1 FDD | - |
| | | Config 2,5 | CR.1.1 TDD | |
| | | Config 3,6 | CR2.1 TDD | |
| SMTC configuration defined in A.3.11 | | Config 1,4 | SMTC.2 | SMTC.2 |
| | | Config 2,3,5,6 | SMTC.1 | SMTC.1 |
| PDSCH/PDCCH subcarrier spacing | kHz | Config 1,2,4,5 | 15 | 120 |
| | | Config 3,6 | 30 | 120 |
| EPRE ratio of PSS to SSS | | Config 1,2,3,4,5,6 | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | |
| N_{oc} ^{Note2} | dBm/15 kHz Note5 | | NA Link only, see clause A.3.7A | -104.7 |
| N_{oc} ^{Note2} | | Config 1,2,4,5 | | -95.7 |

| | | | | |
|---|-------------------------------|-----------------------|--|-----------|
| | dBm/S CS Note4 | Config 3,6 | | -95.7 |
| SS-RSRP ^{Note 3} | dBm/S CS Note5 | Config 1,2,4,5 | | -Infinity |
| | | Config 3,6 | | -86.7 |
| \hat{E}_s / I_{ot} | dB | Config 1,2,3,4,5,6 | | -Infinity |
| \hat{E}_s / N_{oc} | dB | Config 1,2,3,4,5,6 | | 9 |
| I _o ^{Note3} | dBm/9. 36MHz | Config 1,2,4,5 | | - |
| | dBm/38 .16MHz | Config 3,6 | | - |
| | dBm/95 .04 MHz Note5 | Config 1,2,3,4,5,6 | | -66.7 |
| Propagation Condition | | Config 1,2,3,4,5,6 | | AWGN |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone</p> <p>Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone</p> | | | | |

A.5.6.2.6.2 Test Requirements

In test 1 with per-UE gap and in test 3 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

7680 for UE supporting power class 1, or

4800 for UE supporting other power class.

In test 2 with per-UE gap and in test 4 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

81920 for UE supporting power class 1, or

51200 for UE supporting other power class.

In test 1, 2, 3 and 4 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.2.7 EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is not used

A.5.6.2.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.2.7.1-1, A.5.6.2.7.1-2, and A.5.6.2.7.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.5.6.2.7.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #13 as defined in Table A.5.6.2.7.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.5.6.2.7.1-1.

Table A.5.6.2.7.1-1: EN-DC event triggered reporting tests with SSB index reading for FR1-FR2

| Config | Description of serving cell | Description of target cell |
|--|---|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | |
| Note: The UE is only required to be tested in one of the supported test configurations | | |

Table A.5.6.2.7.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

| Parameter | Unit | Test configuration | Value | | Comment |
|---|------|--------------------|---|--------------------------------|---|
| | | | Test 1 | Test 2 | |
| E-UTRA RF Channel Number | | Config 1,2,3,4,5,6 | 1 | | One E-UTRAN TDD carrier frequencies is used. |
| NR RF Channel Number | | Config 1,2,3,4,5,6 | 1, 2 | | Two FR1 NR carrier frequencies is used. |
| Active cell | | Config 1,2,3,4,5,6 | LTE Cell 1 (PCell) and NR cell 2 (PScell) | | LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1. |
| Neighbour cell | | Config 1,2,3,4,5,6 | NR cell 3 | | NR cell 3 is on NR RF channel number 2. |
| Gap Pattern Id | | Config 1,2,3,4,5,6 | 0 | 13 | As specified in clause 9.1.2-1. |
| Measurement gap offset | | Config 1,2,3,4,5,6 | 39 | 39 | |
| SMTC-SSB parameters on NR RF Channel 1 | | Config 1,4 | SSB.1 FR1 | | As specified in clause A.3.10.1 |
| | | Config 2,5 | SSB.1 FR1 | | As specified in clause A.3.10.1 |
| | | Config 3,6 | SSB.2 FR1 | | As specified in clause A.3.10.1 |
| SMTC-SSB parameters on NR RF Channel 2 | | Config 1,2,3,4,5,6 | SSB.1 FR2 | | As specified in clause A.3.10.2 |
| <i>offsetMO</i> | dB | Config 1,2,3,4,5,6 | 6 | | |
| Hysteresis | dB | Config 1,2,3,4,5,6 | 0 | | |
| <i>a4-Threshold</i> | dBm | Config 1,2,3,4,5,6 | [-120] | | |
| CP length | | Config 1,2,3,4,5,6 | Normal | | |
| TimeToTrigger | s | Config 1,2,3,4,5,6 | 0 | | |
| Filter coefficient | | Config 1,2,3,4,5,6 | 0 | | L3 filtering is not used |
| DRX | | Config 1,2,3,4,5,6 | OFF | | DRX is not used |
| Time offset between PCell and PSCell | | Config 1,2,3,4,5,6 | 3 μ s | | Synchronous EN-DC |
| Time offset between serving and neighbour cells | | Config 1,4 | 3ms | | Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2. |
| | | Config 2,3,5,6 | 3 μ s | | Synchronous cells. |
| T1 | s | Config 1,2,3,4,5,6 | 5 | | |
| T2 | s | Config 1,2,3,4,5,6 | 7 for PC1; 4.5 for other PC | 7 for PC1; 4.5 for other PC | |

Table A.5.6.2.7.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

| Parameter | Unit | Test configuration | Cell 2 | | Cell 3 | |
|---|------|--------------------|-----------------------------|----|---------------------------------------|----|
| | | | T1 | T2 | T1 | T2 |
| AoA setup | | Config 1,2,3,4,5,6 | NA | | Setup 1 as specified in clause A.3.15 | |
| NR RF Channel Number | | Config 1,2,3,4,5,6 | 1 | | 2 | |
| Duplex mode | | Config 1,4 | FDD | | TDD | |
| | | Config 2,3,5,6 | TDD | | TDD | |
| BW _{channel} | MHz | Config 1,4 | 10: N _{RB,c} = 52 | | 100: N _{RB,c} = 66 | |
| | | Config 2,5 | 10: N _{RB,c} = 52 | | 100: N _{RB,c} = 66 | |
| | | Config 3,6 | 40: N _{RB,c} = 106 | | 100: N _{RB,c} = 66 | |
| BWP BW | MHz | Config 1,4 | 10: N _{RB,c} = 52 | | 100: N _{RB,c} = 66 | |
| | | Config 2,5 | 10: N _{RB,c} = 52 | | 100: N _{RB,c} = 66 | |
| | | Config 3,6 | 40: N _{RB,c} = 106 | | 100: N _{RB,c} = 66 | |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | Config 1,2,3,4,5,6 | OP.1 | | OP.1 | |
| PDSCH Reference measurement channel | | Config 1,4 | SR.1.1 FDD | | - | |
| | | Config 2,5 | SR.1.1 TDD | | | |
| | | Config 3,6 | SR2.1 TDD | | | |
| CORESET Reference Channel | | Config 1,4 | CR.1.1 FDD | | - | |
| | | Config 2,5 | CR.1.1 TDD | | | |
| | | Config 3,6 | CR2.1 TDD | | | |
| TDD configuration | | Config 2,5 | TDDConf.1.1 | | TDDConf.3.1 | |
| | | Config 3,6 | TDDConf.2.1 | | TDDConf.3.1 | |
| Initial DL BWP | | Config 1,2,3,4,5,6 | DLBWP.0.1 | | NA | |
| Initial UL BWP | | Config 1,2,3,4,5,6 | ULBWP.0.1 | | NA | |
| Dedicated DL BWP | | Config 1,2,3,4,5,6 | DLBWP.1.1 | | NA | |
| Dedicated UL BWP | | Config 1,2,3,4,5,6 | ULBWP.1.1 | | NA | |
| SMTTC configuration defined in A.3.11 | | Config 1,4 | SMTTC.2 | | SMTTC.2 | |
| | | Config 2,3,5,6 | SMTTC.1 | | SMTTC.1 | |
| PDSCH/PDCCH subcarrier spacing | kHz | Config 1,2,4,5 | 15 | | 120 | |
| | | Config 3,6 | 30 | | 120 | |
| EPRE ratio of PSS to SSS | | Config 1,2,3,4,5,6 | 0 | | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |

| | | | | | |
|--|---|--|------------------------------------|--|----------------------|
| EPRE ratio of PDSCH to PDSCH | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | |
| N_{oc} ^{Note2} | dBm/15 kHz Note5 | | | | NA |
| N_{oc} ^{Note2} | dBm/S CS Note4 | Config 1,2,4,5 Config 3,6 | | | NA |
| SS-RSRP ^{Note 3} | dBm/S CS Note5 | Config 1,2,4,5 Config 3,6 | | | -Infinity -87 |
| \hat{E}_s / I_{ot} | dB | Config 1,2,3,4,5,6 | | | -Infinity NA |
| \hat{E}_s / N_{oc} | dB | Config 1,2,3,4,5,6 | NA Link only, see clause A.3.7A | | -Infinity -87 |
| I_o ^{Note3} | dBm/9.36MHz dBm/38.16MHz dBm/95.04 MHz Note5 | Config 1,2,4,5 Config 3,6 Config 1,2,3,4,5,6 | | | - - -Infinity -87 |
| Propagation Condition | | Config 1,2,3,4,5,6 | | | AWGN |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 5: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone</p> <p>Note 6: As observed with 0dBi gain antenna at the centre of the quiet zone</p> | | | | | |

A.5.6.2.7.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

6720 for UE supporting power class 1, or

4160 for UE supporting other power class.

In test 1 and 2 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.2.8 EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is used

A.5.6.2.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.2.8.1-1, A.5.6.2.8.1-2, and A.5.6.2.8.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.5.6.2.8.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #13 as defined in Table A.5.6.2.8.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.5.6.2.8.1-1.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.5.6.2.8.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR2

| Config | Description of serving cell | Description of target cell |
|--|---|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | |
| Note: The UE is only required to be tested in one of the supported test configurations | | |

Table A.5.6.2.8.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

| Parameter | Unit | Test configuration | Value | | | | Comment |
|---|-----------------|--------------------|---|------------------------------|------------------------------|------------------------------|---|
| | | | Test 1 | Test 2 | Test 3 | Test 4 | |
| E-UTRA RF Channel Number | | Config 1,2,3,4,5,6 | 1 | | | | One E-UTRAN TDD carrier frequencies is used. |
| NR RF Channel Number | | Config 1,2,3,4,5,6 | 1, 2 | | | | Two FR1 NR carrier frequencies is used. |
| Active cell | | Config 1,2,3,4,5,6 | LTE Cell 1 (PCell) and NR cell 2 (PScell) | | | | LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1. |
| Neighbour cell | | Config 1,2,3,4,5,6 | NR cell 3 | | | | NR cell 3 is on NR RF channel number 2. |
| Gap Pattern Id | | Config 1,2,3,4,5,6 | 0 | | 13 | | As specified in clause 9.1.2-1. |
| Measurement gap offset | | Config 1,2,3,4,5,6 | 39 | | 39 | | |
| SMTC-SSB parameters on NR RF Channel 1 | | Config 1,4 | SSB.1 FR1 | | | | As specified in clause A.3.10.1 |
| | | Config 2,5 | SSB.1 FR1 | | | | As specified in clause A.3.10.1 |
| | | Config 3,6 | SSB.2 FR1 | | | | As specified in clause A.3.10.1 |
| SMTC-SSB parameters on NR RF Channel 2 | | Config 1,2,3,4,5,6 | SSB.1 FR2 | | | | As specified in clause A.3.10.2 |
| | <i>offsetMO</i> | Config 1,2,3,4,5,6 | 6 | | | | |
| Hysteresis | dB | Config 1,2,3,4,5,6 | 0 | | | | |
| <i>a4-Threshold</i> | dBm | Config 1,2,3,4,5,6 | [-120] | | | | |
| CP length | | Config 1,2,3,4,5,6 | Normal | | | | |
| TimeToTrigger | s | Config 1,2,3,4,5,6 | 0 | | | | |
| Filter coefficient | | Config 1,2,3,4,5,6 | 0 | | | | L3 filtering is not used |
| DRX | | Config 1,2,3,4,5,6 | DRX .1 | DRX .2 | DRX .1 | DRX .2 | As specified in clause A.3.3 |
| Time offset between PCell and PSCell | | Config 1,2,3,4,5,6 | 3 μs | | | | Synchronous EN-DC |
| Time offset between serving and neighbour cells | | Config 1,4 | 3ms | | | | Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2. |
| | | Config 2,3,5,6 | 3μs | | | | Synchronous cells. |
| T1 | s | Config 1,2,3,4,5,6 | 5 | | | | |
| T2 | s | Config 1,2,3,4,5,6 | 11 for PC1; 6.5 for other PC | 108 for PC1; 67 for other PC | 11 for PC1; 6.5 for other PC | 108 for PC1; 67 for other PC | |

Table A.5.6.2.8.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

| Parameter | Unit | Test configuration | Cell 2 | | Cell 3 | |
|---|------|--------------------|-----------------------------|----|---------------------------------------|----|
| | | | T1 | T2 | T1 | T2 |
| AoA setup | | Config 1,2,3,4,5,6 | NA | | Setup 1 as specified in clause A.3.15 | |
| NR RF Channel Number | | Config 1,2,3,4,5,6 | 1 | | 2 | |
| Duplex mode | | Config 1,4 | FDD | | TDD | |
| | | Config 2,3,5,6 | TDD | | TDD | |
| BW _{channel} | MHz | Config 1,4 | 10: N _{RB,c} = 52 | | 100: N _{RB,c} = 66 | |
| | | Config 2,5 | 10: N _{RB,c} = 52 | | 100: N _{RB,c} = 66 | |
| | | Config 3,6 | 40: N _{RB,c} = 106 | | 100: N _{RB,c} = 66 | |
| BWP BW | MHz | Config 1,4 | 10: N _{RB,c} = 52 | | 100: N _{RB,c} = 66 | |
| | | Config 2,5 | 10: N _{RB,c} = 52 | | 100: N _{RB,c} = 66 | |
| | | Config 3,6 | 40: N _{RB,c} = 106 | | 100: N _{RB,c} = 66 | |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | Config 1,2,3,4,5,6 | OP.1 | | OP.1 | |
| PDSCH Reference measurement channel | | Config 1,4 | SR.1.1 FDD | | - | |
| | | Config 2,5 | SR.1.1 TDD | | | |
| | | Config 3,6 | SR2.1 TDD | | | |
| CORESET Reference Channel | | Config 1,4 | CR.1.1 FDD | | - | |
| | | Config 2,5 | CR.1.1 TDD | | | |
| | | Config 3,6 | CR2.1 TDD | | | |
| TDD configuration | | Config 2,5 | TDDConf.1.1 | | TDDConf.3.1 | |
| | | Config 3,6 | TDDConf.2.1 | | TDDConf.3.1 | |
| Initial DL BWP | | Config 1,2,3,4,5,6 | DLBWP.0.1 | | NA | |
| Initial UL BWP | | Config 1,2,3,4,5,6 | ULBWP.0.1 | | NA | |
| Dedicated DL BWP | | Config 1,2,3,4,5,6 | DLBWP.1.1 | | NA | |
| Dedicated UL BWP | | Config 1,2,3,4,5,6 | ULBWP.1.1 | | NA | |
| SMTTC configuration defined in A.3.11 | | Config 1,4 | SMTTC.2 | | SMTTC.2 | |
| | | Config 2,3,5,6 | SMTTC.1 | | SMTTC.1 | |
| PDSCH/PDCCH subcarrier spacing | kHz | Config 1,2,4,5 | 15 | | 120 | |
| | | Config 3,6 | 30 | | 120 | |
| EPRE ratio of PSS to SSS | | Config 1,2,3,4,5,6 | 0 | | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |

| | | | | | |
|--|------------------------|--------------------|--|--|-----------|
| EPRE ratio of PDSCH to PDSCH | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | |
| N_{oc} ^{Note2} | dBm/15 kHz Note5 | | | | -104.7 |
| N_{oc} ^{Note2} | dBm/S CS Note4 | Config 1,2,4,5 | | | -95.7 |
| | | Config 3,6 | | | -95.7 |
| SS-RSRP ^{Note 3} | dBm/S CS Note5 | Config 1,2,4,5 | | | -Infinity |
| | | Config 3,6 | | | -86.7 |
| \hat{E}_s / I_{ot} | dB | Config 1,2,3,4,5,6 | | | -Infinity |
| \hat{E}_s / N_{oc} | dB | Config 1,2,3,4,5,6 | | | 9 |
| I_o ^{Note3} | dBm/9.36MHz | Config 1,2,4,5 | | | - |
| | | Config 3,6 | | | - |
| | dBm/95.04 MHz Note5 | Config 1,2,3,4,5,6 | | | -66.7 |
| Propagation Condition | | Config 1,2,3,4,5,6 | | | AWGN |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 5: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone</p> <p>Note 6: As observed with 0dBi gain antenna at the centre of the quiet zone</p> | | | | | |

A.5.6.2.8.2 Test Requirements

In test 1 with per-UE gap and in test 3 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

10080 for UE supporting power class 1, or

6240 for UE supporting other power class.

In test 2 with per-UE gap and in test 4 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

107520 for UE supporting power class 1, or

66560 for UE supporting other power class.

In test 1, 2, 3 and 4 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.3 L1-RSRP measurement for beam reporting

A.5.6.3.1 SSB based L1-RSRP measurement when DRX is not used

A.5.6.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.5.6.3.1.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15

Table A.5.6.3.1.1-1: Applicable NR configurations for FR2 SSB based L1-RSRP test

| Config | Description |
|--------|--|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

A.5.6.3.1.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.6.3.1.2-1 and Table A.5.6.3.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.5.6.3.1.2-1: General test parameters

| Parameter | Config | Unit | Value |
|---|--------|------|-----------------------------|
| SSB GSCN | 1~4 | | freq1 |
| Duplex mode | 1~4 | | TDD |
| TDD Configuration | 1~4 | | TDDConf.3.1 |
| BW _{channel} | 1~4 | MHz | 100: N _{RB,c} = 66 |
| PDSCH Reference measurement channel | 1~4 | | SR.3.1 TDD |
| RMSI CORESET Reference Channel | 1~4 | | CR.3.1 TDD |
| Dedicated CORESET Reference Channel | 1~4 | | CCR.3.1 TDD |
| SSB configuration | 1,2 | | SSB.1 FR2 |
| | 3,4 | | SSB.2 FR2 |
| OCNG Patterns | 1~4 | | OP.1 |
| Initial BWP Configuration | 1~4 | | DLBWP.0.1 ULBWP.0.1 |
| Dedicated BWP configuration | 1~4 | | DLBWP.1.3 ULBWP.1.3 |
| SMTc configuration | 1~4 | | SMTc.1 |
| TRS Configuration | 1~4 | | TRS.2.1 TDD |
| PDCCH/PDSCH TCI Configuration | 1~4 | | TCI.State.2 |
| DRX configuration | 1~4 | | Off |
| reportConfigType | 1~4 | | periodic |
| reportQuantity | 1~4 | | ssb-index-RSRP |
| Number of reported RS | 1~4 | | 2 |
| L1-RSRP reporting period | 1~4 | slot | 640 |
| T1 | 1~4 | s | 5 |
| T2 | 1~4 | s | 2 |
| Propagation condition | 1~4 | | AWGN |
| EPRE ratio of PSS to SSS | 1~4 | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | 1~4 | | AWGN |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |

Table A.5.6.3.1.2-2: SSB specific test parameters

| Parameter | Config | Unit | SSB#0 | | SSB#1 | |
|--------------------------------|--|--------------|-------------------------------|-------|-----------|-------|
| | | | T1 | T2 | T1 | T2 |
| Angle of arrival configuration | | | Setup 1 according to A.3.15.1 | | | |
| N_{oc} ^{Note2} | 1~4 | dBm/15kHz | -105 | | | |
| N_{oc} ^{Note2} | 1,2 | dBm/SSB SCS | -96 | | | |
| | 3,4 | | -93 | | | |
| \hat{E}_s / I_{ot} | 1~4 | dB | 0 | 0 | -Infinity | 9 |
| SSB RSRP ^{Note3} | 1,2 | dBm/SSB SCS | -96 | -96 | -Infinity | -87 |
| | 3,4 | | -93 | -93 | -Infinity | -84 |
| I_o ^{Note3} | 1,2 | dBm/95.04MHz | -67.5 | -67.5 | -71.1 | -60.7 |
| | 3,4 | | -67.5 | -67.5 | -71.1 | -60.7 |
| \hat{E}_s / N_{oc} | 1~4 | dB | 0 | 0 | -Infinity | 9 |
| Note 1: | The resources for uplink transmission are assigned to the UE prior to the start of time period T2. | | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | |
| Note 3: | SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | |

A.5.6.3.1.3 Test Requirements

The UE shall send L1-RSRP report every 640 slots. No later than X ms plus 640 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1, where X is

- 1680 for UE supporting power class 1
- 1200 for UE supporting power class 2,3 or 4.

The reported L1-RSRP value shall include the Rx antenna gain in the range of [-10 ~ +20] dB.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCCH.

A.5.6.3.2 SSB based L1-RSRP measurement when DRX is used

A.5.6.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.5.6.3.2.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15

Table A.5.6.3.2.1-1: Applicable NR configurations for FR2 SSB based L1-RSRP test

| Config | Description |
|--------|--|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

A.5.6.3.2.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.6.3.2.2-1 and Table A.5.6.3.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.5.6.3.2.2-1: General test parameters

| Parameter | Config | Unit | Value |
|---|--------|------|-----------------------------|
| SSB GSCN | 1~4 | | freq1 |
| Duplex mode | 1~4 | | TDD |
| TDD Configuration | 1~4 | | TDDConf.3.1 |
| BW _{channel} | 1~4 | MHz | 100: N _{RB,c} = 66 |
| PDSCH Reference measurement channel | 1~4 | | SR.3.1 TDD |
| RMSI CORESET Reference Channel | 1~4 | | CR.3.1 TDD |
| Dedicated CORESET Reference Channel | 1~4 | | CCR.3.1 TDD |
| SSB configuration | 1,2 | | SSB.1 FR2 |
| | 3,4 | | SSB.2 FR2 |
| OCNG Patterns | 1~4 | | OP.1 |
| Initial BWP Configuration | 1~4 | | DLBWP.0.1 ULBWP.0.1 |
| Dedicated BWP configuration | 1~4 | | DLBWP.1.3 ULBWP.1.3 |
| SMTc configuration | 1~4 | | SMTc.1 |
| TRS Configuration | 1~4 | | TRS.2.1 TDD |
| PDCCH/PDSCH TCI Configuration | 1~4 | | TCI.State.2 |
| DRX configuration | 1~4 | | DRX.3 |
| reportConfigType | 1~4 | | periodic |
| reportQuantity | 1~4 | | ssb-index-RSRP |
| Number of reported RS | 1~4 | | 2 |
| L1-RSRP reporting period | 1~4 | slot | 640 |
| T1 | 1~4 | s | 5 |
| T2 | 1~4 | s | 3 |
| Propagation condition | 1~4 | | AWGN |
| EPRE ratio of PSS to SSS | 1~4 | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | 1~4 | | AWGN |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |

Table A.5.6.3.2.2-2: SSB specific test parameters

| Parameter | Config | Unit | SSB#0 | | SSB#1 | |
|--------------------------------|--|--------------|-------------------------------|-------|-----------|-------|
| | | | T1 | T2 | T1 | T2 |
| Angle of arrival configuration | | | Setup 1 according to A.3.15.1 | | | |
| N_{oc} ^{Note2} | 1~4 | dBm/15kHz | -105 | | | |
| N_{oc} ^{Note2} | 1,2 | dBm/SSB SCS | -96 | | | |
| | 3,4 | | -93 | | | |
| \hat{E}_s / I_{ot} | 1~4 | dB | 0 | 0 | -Infinity | 9 |
| SSB RSRP ^{Note3} | 1,2 | dBm/SSB SCS | -96 | -96 | -Infinity | -87 |
| | 3,4 | | -93 | -93 | -Infinity | -84 |
| I_o ^{Note3} | 1,2 | dBm/95.04MHz | -67.5 | -67.5 | -71.1 | -60.7 |
| | 3,4 | | -67.5 | -67.5 | -71.1 | -60.7 |
| \hat{E}_s / N_{oc} | 1~4 | dB | 0 | 0 | -Infinity | 9 |
| Note 1: | The resources for uplink transmission are assigned to the UE prior to the start of time period T2. | | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | |
| Note 3: | SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | |

A.5.6.3.2.3 Test Requirements

The UE shall send L1-RSRP report every 640 slots. No later than X ms plus 640 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1, where X is

- 2880 for UE supporting power class 1
- 1920 for UE supporting power class 2,3 or 4.

The reported L1-RSRP value shall include the Rx antenna gain in the range of [-10 ~ +20] dB.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCCH.

A.5.6.3.3 CSI-RS based L1-RSRP measurement when DRX is not used

A.5.6.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells in Table A.5.6.3.3.1-1.

Table A.5.6.3.3.1-1: Applicable NR configurations for FR2 CSI-RS based L1-RSRP test

| Config | Description |
|--|--|
| 1 | LTE FDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations | |

A.5.6.3.3.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.6.3.3.2-1 and Table A.5.6.3.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 480ms from the beginning of the test, the DCI trigger comes in slot 8 of a frame and UE provides the report back based on the reporting configuration as defined in Table A.5.6.3.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.5.6.3.3.2-1: General test parameters

| Parameter | Config | Unit | Value |
|---|--------|------|--|
| SSB GSCN | 1~2 | | freq1 |
| Duplex mode | 1~2 | | TDD |
| TDD Configuration | 1~2 | | TDDConf.3.1 |
| $BW_{channel}$ | 1~2 | MHz | 100: $N_{RB,c} = 66$ |
| PDSCH Reference measurement channel | 1~2 | | SR.3.1 TDD |
| RMSI CORESET Reference Channel | 1~2 | | CR.3.1 TDD |
| Dedicated CORESET Reference Channel | 1~2 | | CCR.3.1 TDD |
| SSB configuration | 1~2 | | SSB.1 FR2 |
| CSI-RS configuration | 1~2 | | CSI-RS.3.3 TDD |
| OCNG Patterns | 1~2 | | OP.1 |
| Initial BWP Configuration | 1~2 | | DLBWP.0.1 ULBWP.0.1 |
| Dedicated BWP configuration | 1~2 | | DLBWP.1.3 ULBWP.1.3 |
| SMTc configuration | 1~2 | | SMTc.1 |
| TRS Configuration | 1~2 | | TRS.2.1 TDD |
| PDCCH/PDSCH TCI Configuration | 1~2 | | TCI.State.2 |
| DRX configuration | 1~2 | | Off |
| reportConfigType | 1~2 | | aperiodic |
| reportQuantity | 1~2 | | cri-RSRP |
| Number of reported RS | 1~2 | | 2 |
| qcl-Info | 1~2 | | SSB#0 for resource#0 SSB#1 for resource#1 |
| reportSlotOffsetList | 1~2 | | 26 |
| Propagation condition | 1~2 | | AWGN |
| T1 | 1~2 | s | 5 |
| EPRE ratio of PSS to SSS | 1~2 | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |

Table A.5.6.3.3.2-1: CSI-RS specific test parameters

| Parameter | Config | Unit | CSI-RS#0 | CSI-RS#1 |
|--|--------|--------------|-------------------------------|----------|
| Angle of arrival configuration | 1~2 | | Setup 1 according to A.3.15.1 | |
| N_{oc} ^{Note1} | 1~2 | dBm/15kHz | -105 | |
| N_{oc} ^{Note1} | 1~2 | dBm/SSB SCS | -95.97 | |
| \hat{E}_s / I_{ot} | 1~2 | dB | 0 | 9 |
| CSI-RS RSRP ^{Note2} | 1~2 | dBm/SSB SCS | -95.97 | -86.97 |
| I_o ^{Note2} | 1~2 | dBm/95.04MHz | -63.97 | -57.47 |
| \hat{E}_s / N_{oc} | 1~2 | dB | 0 | 9 |
| <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | |

A.5.6.3.3.3 Test Requirements

After 480ms from the beginning of the test, the UE shall send L1-RSRP report at slot 26 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the accuracy requirements defined in clause 10.1.20.1. The reported L1-RSRP value shall include the Rx antenna gain in the range of [-10 ~ +20] dB.

For absolute accuracy of CSI-RS0 and absolute accuracy of CSI-RS1, the UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.5.6.3.3.3-1.

For relative accuracy of CSI-RS0 compared with CSI-RS1, the UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

Table A.5.6.3.3.3-1: L1-RSRP absolute accuracy test requirement

| | Test requirement ^{Notes1,2,3} |
|---------|--|
| CSI-RS0 | $CSI-RS_RP0 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq CSI-RS_RP0 + \delta + G_{max}$ |
| CSI-RS1 | $CSI-RS_RP1 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq CSI-RS_RP1 + \delta + G_{max}$ |
| Note 1: | CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration |
| Note 2: | δ is the RSRP absolute accuracy requirement from Table 10.1.20.2.1-1, selected according to the I_o used in the test |
| Note 3: | G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class |

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.3.4 CSI-RS based L1-RSRP measurement when DRX is used

A.5.6.3.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells in Table A.5.6.3.4.1-1.

Table A.5.6.3.4.1-1: Applicable NR configurations for FR2 CSI-RS based L1-RSRP test

| Config | Description |
|--------|--|
| 1 | LTE FDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

A.5.6.3.4.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.6.3.4.2-1 and Table A.5.6.3.4.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 1440ms from the beginning of the test, the DCI trigger comes in slot 8 of a frame and UE provides the report back based on the reporting configuration as defined in Table A.5.6.3.4.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.5.6.3.4.2-1: General test parameters

| Parameter | Config | Unit | Value |
|---|--------|------|--|
| SSB GSCN | 1~2 | | freq1 |
| Duplex mode | 1~2 | | TDD |
| TDD Configuration | 1~2 | | TDDConf.3.1 |
| $BW_{channel}$ | 1~2 | MHz | 100: $N_{RB,c} = 66$ |
| PDSCH Reference measurement channel | 1~2 | | SR.3.1 TDD |
| RMSI CORESET Reference Channel | 1~2 | | CR.3.1 TDD |
| Dedicated CORESET Reference Channel | 1~2 | | CCR.3.1 TDD |
| SSB configuration | 1~2 | | SSB.1 FR2 |
| CSI-RS configuration | 1~2 | | CSI-RS.3.3 TDD |
| OCNG Patterns | 1~2 | | OP.1 |
| Initial BWP Configuration | 1~2 | | DLBWP.0.1 ULBWP.0.1 |
| Dedicated BWP configuration | 1~2 | | DLBWP.1.3 ULBWP.1.3 |
| SMTc configuration | 1~2 | | SMTc.1 |
| TRS Configuration | 1~2 | | TRS.2.1 TDD |
| PDCCH/PDSCH TCI Configuration | 1~2 | | TCI.State.2 |
| DRX configuration | 1~2 | | DRX.3 |
| reportConfigType | 1~2 | | aperiodic |
| reportQuantity | 1~2 | | cri-RSRP |
| Number of reported RS | 1~2 | | 2 |
| qcl-Info | 1~2 | | SSB#0 for resource#0 SSB#1 for resource#1 |
| reportSlotOffsetList | 1~2 | | 26 |
| Propagation condition | 1~2 | | AWGN |
| T1 | 1~2 | s | 5 |
| EPRE ratio of PSS to SSS | 1~2 | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |

Table A.5.6.3.4.2-1: CSI-RS specific test parameters

| Parameter | Config | Unit | CSI-RS#0 | CSI-RS#1 |
|--------------------------------|--|--------------|-------------------------------|----------|
| Angle of arrival configuration | 1~2 | | Setup 1 according to A.3.15.1 | |
| N_{oc} ^{Note1} | 1~2 | dBm/15kHz | -105 | |
| N_{oc} ^{Note1} | 1~2 | dBm/SSB SCS | -95.97 | |
| \hat{E}_s / I_{ot} | 1~2 | dB | 0 | 9 |
| CSI-RS RSRP ^{Note2} | 1~2 | dBm/SSB SCS | -95.97 | -86.97 |
| I_o ^{Note2} | 1~2 | dBm/95.04MHz | -63.97 | -57.47 |
| \hat{E}_s / N_{oc} | 1~2 | dB | 0 | 9 |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | |
| Note 3: | CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | |

A.5.6.3.4.3 Test Requirements

After 1440ms from the beginning of the test, the UE shall send L1-RSRP report at slot 26 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the accuracy requirements defined in clause 10.1.20.1.

For absolute accuracy of CSI-RS0 and absolute accuracy of CSI-RS1, the UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.5.6.3.4.3-1.

For relative accuracy of CSI-RS0 compared with CSI-RS1, the UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

Table A.5.6.3.4.3-1: L1-RSRP absolute accuracy test requirement

| | Test requirement ^{Notes1,2,3} |
|---------|--|
| CSI-RS0 | $CSI-RS_RP0 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq CSI-RS_RP0 + \delta + G_{max}$ |
| CSI-RS1 | $CSI-RS_RP1 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq CSI-RS_RP1 + \delta + G_{max}$ |
| Note 1: | CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration |
| Note 2: | δ is the RSRP absolute accuracy requirement from Table 10.1.20.2.1-1, selected according to the I_o used in the test |
| Note 3: | G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class |

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.7 Measurement Performance requirements

A.5.7.1 SS-RSRP

A.5.7.1.1 EN-DC intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.5.7.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.3.1.1 and 10.1.3.1.2 for intra-frequency measurements.

A.5.7.1.1.2 Test parameters

In this set of test cases, all NR cells are on the same carrier frequency. Supported test configurations are shown in Table A.5.7.1.1.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in Table A.5.7.1.1.2-2 and A.5.7.1.1.2-3. The E-UTRA PCell is configured as specified in clause A.3.7.2.2. In all test cases, Cell 1 is the PCell, cell 2 is the PSCell and Cell 3 is the target cell. The test consists of two time phases T1 and T2.

Table A.5.7.1.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | FDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | TDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to pass in one of the supported test configurations |

Table A.5.7.1.1.2-2: SS-RSRP Intra frequency general test parameters

| Parameter ^{Note 5} | Unit | T1 | | T2 | |
|-----------------------------|------|--------|--------|--------|--------|
| | | Cell 2 | Cell 3 | Cell 2 | Cell 3 |
| Physical cell ID | | 489 | 0 | 489 | 0 |

| | | | | | |
|--|-----|-----------------------------|--------------|-----------------------------|--------------|
| SSB ARFCN | | freq1 | | freq1 | |
| Duplex mode | | TDD | | TDD | |
| TDD configuration | | TDDConf.3.1 | | TDDConf.3.1 | |
| BW _{channel} | MHz | 100: N _{RB,c} = 24 | | 100: N _{RB,c} = 24 | |
| PDSCH Reference measurement channel | | SR.3.1 TDD | - | SR.3.1 TDD | - |
| RMSI CORESET Reference Channel | | CR.3.1 TDD | - | CR.3.1 TDD | - |
| Dedicated CORESET Reference Channel | | CCR.3. 1 TDD | - | CCR.3. 1 TDD | - |
| OCNG Patterns | | OP.3 | OP.3 | OP.3 | OP.3 |
| SSB configuration | | SSB.3 FR2 | SSB.3 FR2 | SSB.3 FR2 | SSB.3 FR2 |
| SMTC configuration | | SMTC. 1 | SMTC. 1 | SMTC. 1 | SMTC. 1 |
| Time offset with Cell 2 | μs | - | 3 | - | 3 |
| PDSCH/PDCCH subcarrier spacing | kHz | 120 | 120 | 120 | 120 |
| EPRE ratio of PSS to SSS | dB | 0 | 0 | 0 | 0 |
| EPRE ratio of PBCH_DMRS to SSS | | | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | | | |
| Propagation conditions | | AWGN | AWGN | AWGN | AWGN |
| Antenna configuration | | 1x2 | 1x2 | 1x2 | 1x2 |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Void</p> <p>Note 3: Void</p> <p>Note 4: Void</p> <p>Note 5: All parameters apply for configuration 1 and 2</p> <p>Note 6: Void</p> | | | | | |

Table A.5.7.1.1.2-3: SS-RSRP Intra frequency OTA related test parameters

| Parameter | Unit | T1 | | T2 | |
|-----------|------|--------|--------|--------|--------|
| | | Cell 2 | Cell 3 | Cell 2 | Cell 3 |

| Angle of arrival configuration | | Setup 1 according to clause A.3.15.1 | | | |
|---|---|--------------------------------------|-------|---------------------------------------|-------------------------------------|
| Assumption for UE beams ^{Note 8} | | Rough | | | |
| N_{oc} ^{Note1} | dBm/15kHz z ^{Note4} | -91.6 | | N/A | |
| N_{oc} ^{Note1} | dBm/SCS ^{Note4} | -82.6 | | N/A | |
| \hat{E}_s/N_{oc} | dB | 6.0 | 1.0 | N/A | N/A |
| E_s | dBm/SCS ^{Note4} | | | (Table B.2.2-2 Rx Beam Peak +3.1dB) | (Table B.2.2-2 Rx Beam Peak +3.1dB) |
| SSB_RP ^{Note2} | dBm/SCS | -76.6 | -81.6 | (Table B.2.2-2 Rx Beam Peak +3.1dB) | (Table B.2.2-2 Rx Beam Peak +3.1dB) |
| $\hat{E}_s/I_{ot\ BB}$ ^{Note6} | dB | 2.44 | -5.98 | -5.98 | -5.98 |
| I_o ^{Note2} | dBm/95.04 MHz ^{Note4} | -50.05 | | (Table B.2.2-2 Rx Beam Peak +30.70dB) | |
| Note 1: | Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | |
| Note 2: | SSB_RP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | |
| Note 3: | Void | | | | |
| Note 4: | Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone | | | | |
| Note 5: | Void | | | | |
| Note 6: | Calculation of $E_s/I_{ot\ BB}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 2dB for UE multi-band relaxation factor $\sum MB_P$ from TS 38.101-2 [19] Table 6.2.1.3-4. | | | | |
| Note 7: | All parameters apply for configurations 1 and 2 | | | | |
| Note 8: | Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation | | | | |

A.5.7.1.1.3 Test Requirements

The SS-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clauses 10.1.3.1.1 and relative accuracy requirements in clause 10.1.3.1.2. The following requirements are to be verified:

During T1:

Absolute accuracy of Cell 2 and absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in table A.5.7.1.1.3-1.

Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1.3.1.2-1.

During T2:

Absolute accuracy of Cell 2 and absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in table A.5.7.1.1.3-1.

Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1.3.1.2-1.

During T1 and T2:

Relative accuracy of Cell 2 during T2 compared with Cell 2 during T1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1.3.1.2-1

Relative accuracy of Cell 3 during T2 compared with Cell 3 during T1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1.3.1.2-1.

Table A.5.7.1.1.3-1: SS-RSRP absolute accuracy test requirement

| | Test requirement ^{Notes1,2,3} |
|---------|---|
| Cell 2 | $SSB_RP2 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP2 + \delta + G_{max}$ |
| Cell 3 | $SSB_RP3 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP3 + \delta + G_{max}$ |
| Note 1: | SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration |
| Note 2: | δ is the RSRP absolute accuracy requirement from Table 10.1.3.1.1-1, selected according to the I_o used in the test |
| Note 3: | G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class |

A.5.7.1.2 EN-DC inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.5.7.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.5.1.1 and 10.1.5.1.2 for inter-frequency measurements with the testing configurations for NR cells in Table A.5.7.1.2.1-1.

Table A.5.7.1.2.1-1: Applicable NR configurations for FR2 inter-frequency SS-RSRP accuracy test

| Configuration | Description |
|---------------|--|
| 1 | FDD LTE PCell, cells 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | TDD LTE PCell, cells 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 3 | FDD LTE PCell, cells 2&3 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 4 | TDD LTE PCell, cells 2&3 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |

A.5.7.1.2.2 Test parameters

In this set of test cases, there are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on a different frequency than the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.5.7.1.2.2-1 and Table A.5.7.1.2.2-2 below. Both absolute and relative accuracy of RSRP intrer-frequency measurements are tested by using the parameters in Table A.5.7.1.2.2-1 and Table A.5.7.1.2.2-2. The inter-frequency measurements are supported by a measurement gap.

Table A.5.7.1.2.2-1: SS-RSRP inter-frequency test parameters

| Parameter | Config | Unit | Test 1 | | Test 2 | |
|---|--------|------|------------------------|--------|------------------------|--------|
| | | | Cell 2 | Cell 3 | Cell 2 | Cell 3 |
| SSB ARFCN | 1~4 | | freq1 | freq2 | freq1 | freq2 |
| BW _{channel} | 1~4 | | 100: NRB,c = 24 | | 100: NRB,c = 24 | |
| Duplex mode | 1~4 | | TDD | TDD | TDD | TDD |
| TDD configuration | 1~4 | | TDDConf.3.1 | | TDDConf.3.1 | |
| PDSCH Reference measurement channel | 1~4 | | SR.3.1 TDD | - | SR.3.1 TDD | - |
| RMSI CORESET Reference Channel | 1~4 | | CR.3.1 TDD | - | CR.3.1 TDD | - |
| Dedicated CORESET Reference Channel | 1~4 | | CCR.3.1 TDD | - | CCR.3.1 TDD | - |
| SSB configuration | 1,2 | | SSB.3 FR2 | | SSB.3 FR2 | |
| | 3,4 | | SSB.4 FR2 | | SSB.4 FR2 | |
| OCNG Patterns | 1~4 | | OP.3 | | OP.3 | |
| Initial BWP Configuration | 1~4 | | DLBWP.0.1 ULBWP.0.1 | | DLBWP.0.1 ULBWP.0.1 | |
| Dedicated BWP configuration | 1~4 | | DLBWP.1.3 ULBWP.1.3 | | DLBWP.1.3 ULBWP.1.3 | |
| TRS Configuration | 1~4 | | TRS.2.1 TDD | | TRS.2.1 TDD | |
| PDCCH/PDSCH TCI Configuration | 1~4 | | TCI.State.2 | | TCI.State.2 | |
| SMTTC configuration | 1~4 | | SMTTC.1 | | SMTTC.1 | |
| Time offset between Cell 2 and Cell 3 | 1~4 | µs | 3 | | 3 | |
| EPRE ratio of PSS to SSS | 1~4 | dB | 0 | 0 | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | | | | |
| Propagation condition | 1~4 | - | AWGN | AWGN | AWGN | AWGN |
| Antenna configuration | 1~4 | - | 1x2 | 1x2 | 1x2 | 1x2 |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | |
| Note 2: Void | | | | | | |

Table A.5.7.1.2.2-2: SS-RSRP inter-frequency OTA related test parameters

| Parameter | Unit | Test 1 | | Test 2 | |
|-----------|------|--------|--------|--------|--------|
| | | Cell 2 | Cell 3 | Cell 2 | Cell 3 |
| | | | | | |

| Angle of arrival configuration | | Setup 4b according to clause A.3.15.4.2 | | Setup 4b according to clause A.3.15.4.2 | |
|--|--|---|-------------------|---|---------------------------------------|
| | | AoA1 Spherical coverage | AoA2 Rx Beam Peak | AoA1 Spherical coverage | AoA2 Rx Beam Peak |
| Assumption for UE beams ^{Note 7} | | Rough | | Rough | |
| N_{oc} ^{Note1} | dBm/15kHz _z ^{Note4} | -90.6 | -90.6 | (Table B.2.3-2 Rx Beam Peak +1.97dB) | (Table B.2.3-2 Rx Beam Peak - 3.03dB) |
| N_{oc} ^{Note1} | dBm/SCS _{Note4} | -81.6 | -81.6 | (Table B.2.3-2 Rx Beam Peak +11.0dB) | (Table B.2.3-2 Rx Beam Peak +6.0dB) |
| \hat{E}_s/N_{oc} | dB | 6.0 | 6.0 | 17.0 | -1.0 |
| SSB_RP ^{Note2} | dBm/SCS | -75.60 | -75.60 | (Table B.2.3-2 Rx Beam Peak +28.0dB) | (Table B.2.3-2 Rx Beam Peak +5.0dB) |
| (SSB_RP _{Cell 1} – SSB_RP _{Cell 2}) | dB | 0 | | 23.00 | |
| $\hat{E}_s/I_{ot\ BB}$ ^{Note6} | dB | 5.29 | 5.96 | 8.86 | -3.92 |
| I_o ^{Note2} | dBm/95.04 MHz _{Note4} | -50.03 | -50.03 | (Table B.2.3-2 Rx Beam Peak +52.68dB) | (Table B.2.3-2 Rx Beam Peak +33.13dB) |
| ($I_{ofreq\ 1} - I_{ofreq\ 2}$) | dB | 0 | | 19.55 | |
| Note 1: | Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | |
| Note 2: | SSB_RP, E_s/I_{ot} , I_o , (SSB_RP _{Cell 2} – SSB_RP _{Cell 1}) and ($I_{ofreq\ 2} - I_{ofreq\ 1}$) levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | |
| Note 3: | Void | | | | |
| Note 4: | Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone | | | | |
| Note 5: | Void | | | | |
| Note 6: | Calculation of $E_s/I_{ot\ BB}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 2dB for UE multi-band relaxation factor $\sum MB_P$ or $\sum MB_S$ from TS 36.101-2 [19] Table 6.2.1.3-4. | | | | |
| Note 7: | Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation | | | | |

A.5.7.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 2 and Cell 3 shall fulfil the absolute requirements in clause 10.1.5.1.1 and the relative requirements in clause 10.1.5.1.2.

Test 1:

Absolute accuracy of Cell 2 and absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table A.5.7.1.2.3-1.

Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in A.5.7.1.2.3-2.

Test 2:

Absolute accuracy of Cell 2 and absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table A.5.7.1.2.3-1.

Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in A.5.7.1.2.3-2.

Table A.5.7.1.2.3-1: SS-RSRP absolute accuracy test requirement

| | Test requirement ^{Notes1,2,3,4} |
|---------|--|
| Cell 2 | $SSB_RP2 - \delta + G_{min} + X \leq \text{Reported RSRP(dBm)} \leq SSB_RP2 + \delta + G_{max}$ |
| Cell 3 | $SSB_RP3 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP3 + \delta + G_{max}$ |
| Note 1: | SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration |
| Note 2: | δ is the RSRP absolute accuracy requirement from Table 10.1.5.1.1-1, selected according to the I_o used in the test |
| Note 3: | G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class |
| Note 4: | X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value. |

Table A.5.7.1.2.3-2: SS-RSRP relative accuracy test requirement

| | Test requirement ^{Notes1,2,3,4} |
|-----------------|--|
| Cell 3 – Cell 2 | $SSB_RP3 - SSB_RP2 - \delta \leq \text{Reported RSRP(dB)} \leq SSB_RP3 - SSB_RP2 + \delta - (X)$ |
| Note 1: | SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration |
| Note 2: | δ is the RSRP relative accuracy requirement from Table 10.1.5.1.2-1 |
| Note 3: | Void |
| Note 4: | X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value. |

A.5.7.1.3 EN-DC inter-frequency measurement accuracy with FR1 serving cell and FR2 target cell

A.5.7.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.5.1.1 for inter-frequency measurements with the testing configurations in Table A.5.7.1.3.1-1.

Table A.5.7.1.3.1-1: Applicable NR configurations for FR2 inter-frequency SS-RSRP accuracy test

| Config | Description of serving cell | Description of target cell |
|--|---|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | |
| Note: The UE is only required to be tested in one of the supported test configurations | | |

A.5.7.1.3.2 Test parameters

In this set of test cases there are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on a different frequency than the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.5.7.1.3.2-1 and Table A.5.7.1.3.2-2 below. Both absolute and relative accuracy of RSRP inter-frequency measurements are tested by using the parameters in Table A.5.7.1.3.2-1 and Table A.5.7.1.3.2-2. The inter-frequency measurements are supported by a measurement gap.

Table A.5.7.1.3.2-1: SS-RSRP inter-frequency test parameters

| Parameter | Config | Unit | Test 1 | | Test 2 | |
|-------------------------------------|--------|------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| | | | Cell 2 | Cell 3 | Cell 2 | Cell 3 |
| SSB ARFCN | 1~6 | | freq1 | freq2 | freq1 | freq2 |
| BW _{channel} | 1,4 | MHz | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 |
| | 2,5 | | 10: N _{RB,c} = 52 | | 10: N _{RB,c} = 52 | |
| | 3,6 | | 40: N _{RB,c} = 106 | | 40: N _{RB,c} = 106 | |
| Gap pattern ID | | | 0 | | 0 | |
| Duplex mode | 1,4 | | FDD | TDD | FDD | TDD |
| | 2,5 | | TDD | | TDD | |
| | 3,6 | | TDD | | TDD | |
| TDD configuration | 1,4 | | N/A | TDDConf. 3.1 | N/A | TDDConf. 3.1 |
| | 2,5 | | TDDConf. 1.1 | | TDDConf. 1.1 | |
| | 3,6 | | TDDConf. 2.1 | | TDDConf. 2.1 | |
| PDSCH Reference measurement channel | 1,4 | | SR.1.1 FDD | - | SR.1.1 FDD | - |
| | 2,5 | | SR.1.1 TDD | | SR.1.1 TDD | |
| | 3,6 | | SR.2.1 FDD | | SR.2.1 FDD | |
| RMSI CORESET Reference Channel | 1,4 | | CR.1.1 FDD | - | CR.1.1 FDD | - |
| | 2,5 | | CR.1.1 TDD | | CR.1.1 TDD | |
| | 3,6 | | CR.2.1 FDD | | CR.2.1 FDD | |
| Dedicated CORESET Reference Channel | 1,4 | | CCR.1.1 FDD | - | CCR.1.1 FDD | - |
| | 2,5 | | CCR.1.1 TDD | | CCR.1.1 TDD | |
| | 3,6 | | CCR.2.1 TDD | | CCR.2.1 TDD | |
| SSB configuration | 1,4 | | SSB.1 FR1 | SSB.1 FR2 | SSB.1 FR1 | SSB.1 FR2 |
| | 2,5 | | SSB.1 FR1 | | SSB.1 FR1 | |

| | | | | | | |
|---|-----|---------|--|------|--|------|
| | 3,6 | | SSB.2 FR1 | | SSB.2 FR1 | |
| OCNG Patterns | 1~6 | | OP.1 | | OP.1 | |
| Initial BWP Configuration | 1~6 | | DLBWP.0.1 ULBWP.0.1 | | DLBWP.0.1 ULBWP.0.1 | |
| Dedicated BWP configuration | 1~6 | | DLBWP.1.3 ULBWP.1.3 | | DLBWP.1.3 ULBWP.1.3 | |
| TRS Configuration | 1~6 | | TRS.2.1 TDD | | TRS.2.1 TDD | |
| PDCCH/PDSCH TCI Configuration | 1~6 | | TCI.State.2 | | TCI.State.2 | |
| SMTTC configuration | 1~6 | | SMTTC.1 | | SMTTC.1 | |
| Time offset between Cell 2 and Cell 3 | 1~6 | μ s | 3 | | 3 | |
| EPRE ratio of PSS to SSS | 1~6 | dB | 0 | 0 | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | | | | |
| Propagation condition | 1~6 | - | NA Link only, see clause A.3.7A | AWGN | NA Link only, see clause A.3.7A | AWGN |
| Antenna configuration | 1~6 | - | | 1x2 | | 1x2 |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> | | | | | | |

Table A.5.7.1.3.2-2: SS-RSRP inter-frequency OTA related test parameters

| Parameter | Config | Unit | Test 1 | | Test 2 ^{NOTE 3} | |
|--|--------|---------------|---|----------|---|---------------------|
| | | | Cell 2 | Cell 3 | Cell 2 | Cell 3 |
| Angle of arrival configuration according to clause A.3.15 | | | NA | Setup 2b | NA | Setup 2b |
| Assumption for UE beams ^{Note 4} | | | N/A | Rough | N/A | Rough |
| N_{oc} | 1~4 | dBm/15 kHz | NA Link only, see clause A.3.7A | TBD | NA Link only, see clause A.3.7A | NA |
| N_{oc} | 1,2 | dBm/SS | | TBD | | NA |
| | 3,4 | B SCS | | TBD | | NA |
| \hat{E}_s / I_{ot} | 1~4 | dB | | TBD | | NA |
| SS-RSRP ^{Note1} | 1,2 | dBm/SCS | | TBD | | As in Table B.2.3-2 |
| | 3,4 | | | TBD | | As in Table B.2.3-2 |
| I_o ^{Note1} | 1~4 | dBm/95.04M Hz | | TBD | | SS-RSRP+28.98 |
| \hat{E}_s / N_{oc} | 1~4 | dB | TBD | NA | | |
| <p>Note 1: RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 3: No additional noise is added by the test system in Test 2.</p> <p>Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation</p> | | | | | | |

A.5.7.1.3.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 3 shall fulfil the Absolute requirement in clause 10.1.5.1.1.

A.5.7.2 SS-RSRQ

A.5.7.2.1 EN-DC Intra-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.5.7.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.8.1.1.

A.5.7.2.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configurations are shown in Table A.5.7.2.1.2-1. The absolute accuracy of SS-RSRQ intra-frequency measurement is test by using the parameters in Table A.5.7.2.1.2-2 and Table A.5.7.2.1.2-3. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1. In all test cases, Cell 2 is the PSCell and Cell 3 is the target cell.

Table A.5.7.2.1.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

| Configuration | Description |
|----------------------|---|
| 1 | FDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | TDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to pass in one of the supported test configurations |

Table A.5.7.2.1.2-2: SS-RSRQ Intra frequency test parameters

| Parameter | | Unit | Test 1 | | Test 2 | |
|--|------------------|------|----------------------|--------------|----------------------|--------------|
| | | | Cell 2 | Cell 3 | Cell 2 | Cell 3 |
| SSB ARFCN | | | Freq1 | | Freq1 | |
| Duplex mode | | | TDD | | TDD | |
| TDD configuration | | | TDDConf.3.1 | | TDDConf.3.1 | |
| $BW_{channel}$ | | MHz | 100: $N_{RB,c} = 66$ | | 100: $N_{RB,c} = 66$ | |
| BWP configuration | Initial DL BWP | | DLBWP.0.1 | | | |
| | Dedicated DL BWP | | DLBWP.1.1 | | | |
| | Initial UL BWP | | ULBWP.0.1 | | | |
| | Dedicated UL BWP | | ULBWP.1.1 | | | |
| TRS configuration | | | TRS.2.1 TDD | | TRS.2.1 TDD | |
| TCI state | | | TCI.State .0 | | TCI.State .0 | |
| PDSCH Reference measurement channel | | | SR.3.1 TDD | | SR.3.1 TDD | |
| RMSI CORESET Reference Channel | | | CR.3.1 TDD | - | CR.3.1 TDD | - |
| Control channel RMC | | | CCR.3.1 TDD | - | CCR.3.1 TDD | - |
| OCNG Patterns | | | OP.1 | OP.1 | OP.1 | OP.1 |
| SMTC configuration | | | SMTC.1 | | | |
| SSB configuration | | | SSB.1 FR2 | SSB.1 FR2 | SSB.1 FR2 | SSB.1 FR2 |
| PDSCH/PDCCH subcarrier spacing | | kHz | 120 | 120 | 120 | 120 |
| SS-RSSI-Measurement | | | Not Applicable | | | |
| EPRE ratio of PSS to SSS | | dB | 0 | 0 | 0 | 0 |
| EPRE ratio of PBCH_DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | | | | |
| \hat{E}_s / N_{oc} | | dB | 3 | 3 | -3 | -3 |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRQ, SS-RSRP, and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 5: Void</p> | | | | | | |

Table A.5.7.2.1.2-3: SS-RSRQ Intra frequency OTA related test parameters

| Parameter | Unit | Test 1 | | Test 2 | |
|---|---------------------------------------|--------------------------------------|--------|--------------------------------------|--------|
| | | Cell 2 | Cell 3 | Cell 2 | Cell 3 |
| Angle of arrival configuration | | Setup 1 according to clause A.3.15.1 | | Setup 1 according to clause A.3.15.1 | |
| Assumption for UE beams ^{Note 9} | | Rough | | | |
| N_{oc} ^{Note1} | dBm/15kHz ^{Note4} | -95 | | -95 | |
| N_{oc} ^{Note1} | dBm/SCS ₃ ^{Note3} | -86 | | -86 | |
| SS-RSRP ^{Note2} | dBm/SCS _{Note4} | -83 | -83 | -89 | -89 |
| SS-RSRQ ^{Note2} | dB | -14.77 | -14.77 | -16.81 | -16.81 |
| \hat{E}_s/I_{ot} | dB | -1.76 | -1.76 | -4.76 | -4.76 |
| I_o ^{Note2} | dBm/95.04 MHz ^{Note4} | -50 | | --54 | -54 |

| | |
|---------|--|
| Note 1: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. |
| Note 2: | SS-RSRQ, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. |
| Note 3: | SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. |
| Note 4: | Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone |
| Note 5: | As observed with 0dBi gain antenna at the centre of the quiet zone |
| Note 6: | NR operating band groups are as defined in Clause 3.5.2. |
| Note 7: | Void |
| Note 8: | Void |
| Note 9: | Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation |

A.5.7.2.1.3 Test Requirements

The SS-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal SS-RSRQ+2.5dB to Nominal SS-RSRQ -3.5dB and the SS-RSRQ measurement accuracy in test 2 shall be within the range Nominal SS-RSRQ +3.5dB to Nominal SS-RSRQ -4.5dB according to the requirements in clause 10.1.8.1.1 with an additional -1dB margin reflecting the possible impact of UE self noise in the test. Nominal SS-RSRQ is the value shown in table A.5.7.2.1.2-3. The SS-RSRQ relative measurement accuracy shall meet the requirements in clause 10.1.8.1.1.

A.5.7.2.2 EN-DC Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.5.7.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.9.1.1 and 10.1.9.1.2 for inter-frequency measurement.

A.5.7.2.2.2 Test Parameters

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.5.7.2.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-RSRQ inter-frequency measurement are tested by using test setup in Table A.5.7.2.2.2-2 and Table A.5.7.2.2.2-3. In all test cases, Cell 2 is the PSCell and Cell 3 is target cell. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1.

Table A.5.7.2.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |

Table A.5.7.2.2.2-2: SS-RSRQ Inter frequency general test parameters

| Parameter | Unit | Test 1 | | Test 2 | |
|---|------|----------------------|----------------|----------------------|----------------|
| | | Cell 2 | Cell 3 | Cell 2 | Cell 3 |
| SSB ARFCN | | Freq1 | freq2 | freq1 | Freq2 |
| Duplex mode | | TDD | | TDD | |
| TDD configuration | | TDDConf.3.1 | | TDDConf.3.1 | |
| $BW_{channel}$ | MHz | 100: $N_{RB,c} = 66$ | | 100: $N_{RB,c} = 66$ | |
| PDSCH Reference measurement channel | | SR.3.1 TDD | - | SR.3.1 TDD | - |
| RMSI CORESET Reference Channel | | CR.3.1 TDD | - | CR.3.1 TDD | - |
| OCNG Patterns | | OP.1 | OP.1 | OP.1 | OP.1 |
| SMTC configuration | | SMTC. 1 FR2 | SMTC. 1 FR2 | SMTC. 1 FR2 | SMTC. 1 FR2 |
| PDSCH/PDCCH subcarrier spacing | kHz | 120 | 120 | 120 | 120 |
| EPRE ratio of PSS to SSS | dB | 0 | 0 | 0 | 0 |
| EPRE ratio of PBCH_DMRS to SSS | | | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | | |
| \hat{E}_s / N_{oc} | dB | -1.75 | -1.75 | -3 | -3 |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRQ, SS-RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> | | | | | |

Table A.5.7.2.2.2-3: SS-RSRQ Inter frequency OTA related test parameters

| Parameter | Unit | Test 1 | | Test 2 | |
|-----------|------|--------|--------|--------|--------|
| | | Cell 2 | Cell 3 | Cell 2 | Cell 3 |

| AoA setup | | Setup 1 in clause in clause A.3.15 | | Setup 1 in clause in clause A.3.15 | |
|--|-----------------------------------|---------------------------------------|--------|---------------------------------------|--------|
| Assumption for UE beams ^{Note 8} | | Rough | | Rough | |
| N_{oc} ^{Note1} | dBm/15kHz ^{Note4} | -94.03 | | -94.03 | |
| N_{oc} ^{Note1} | dBm/SCS ^{Note3} | -85.0 | | -85.0 | |
| SSB_RP ^{Note2} | dBm/SCS ^{Note4} | -86.75 | -86.75 | -88 | -88 |
| SS-RSRQ ^{Note2} | dB | -14.75 | -14.75 | -15.56 | -15.56 |
| \hat{E}_s / I_{ot} | dB | -1.75 | -1.75 | -3 | -3 |
| I_o ^{Note2} | dBm/95.04 MHz ^{Note4} | -53.8 | -53.8 | -54.25 | -54.25 |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-RSRQ, SSB_RP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone</p> <p>Note 6: Void</p> <p>Note 7: Void</p> <p>Note 8: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation</p> | | | | | |

A.5.7.2.2.3 Test Requirements

The SS-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal SS-RSRQ+2.5dB to Nominal SS-RSRQ-3.5dB and the SS-RSRQ measurement accuracy in test 2 shall be within the range Nominal SS-RSRQ+3.5dB to Nominal SS-RSRQ-4.5dB according to the requirements in clause 10.1.10.1.1 with an additional -1dB margin reflecting the possible impact of UE self noise in the test.

The SS-RSRQ relative measurement accuracy shall fulfil the requirements in clause 10.1.10.1.2.

A.5.7.3 SS-SINR

A.5.7.3.1 EN-DC Intra-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.5.7.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.13.1.1.

A.5.7.3.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configurations are shown in Table A.5.7.3.1.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is test by using the parameters in Table A.5.7.3.1.2-2 and Table A.5.7.3.1.2-3. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1. In all test cases, Cell 2 is the PSCell and Cell 3 is the target cell.

Table A.5.7.3.1.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | FDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | TDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to pass in one of the supported test configurations |

Table A.5.7.3.1.2-2: SS-SINR Intra frequency test parameters

| Parameter | Unit | Test 1 | | Test 2 | |
|--|------|----------------------|--------------|----------------------|--------------|
| | | Cell 2 | Cell 3 | Cell 2 | Cell 3 |
| SSB ARFCN | | Freq2 | | Freq2 | |
| Duplex mode | | TDD | | TDD | |
| TDD configuration | | TDDConf.3.1 | | TDDConf.3.1 | |
| BW_{channel} | MHz | 100: $N_{RB,c} = 66$ | | 100: $N_{RB,c} = 66$ | |
| Downlink initial BWP configuration | | DLBWP.0.1 | | | |
| Downlink dedicated BWP configuration | | DLBWP.1.1 | | | |
| Uplink initial BWP configuration | | ULBWP.0.1 | | | |
| Uplink dedicated BWP configuration | | ULBWP.1.1 | | | |
| DRX cycle configuration | ms | Not applicable | | | |
| TRS configuration | | TRS.2.1 TDD | | | |
| TCI state | | TCI.State.0 | | | |
| PDSCH Reference measurement channel | | SR.3.1 TDD | | SR.3.1 TDD | |
| RMSI CORESET Reference Channel | | CR.3.1 TDD | - | CR.3.1 TDD | - |
| Dedicated RMSI CORESET Reference Channel | | CCR.3 .1 TDD | - | CCR.3. 1 TDD | - |
| OCNG Patterns | | OP.1 | OP.1 | OP.1 | OP.1 |
| SMTC configuration | | SMTC.1 | | | |
| SSB configuration | | SSB.1 FR2 | SSB.1 FR2 | SSB.1 FR2 | SSB.1 FR2 |
| PDSCH/PDCCH subcarrier spacing | kHz | 120 | 120 | 120 | 120 |
| SS-RSSI-Measurement | | Not Applicable | | | |
| EPRE ratio of PSS to SSS | dB | 0 | 0 | 0 | 0 |
| EPRE ratio of PBCH_DMRS to SSS | | | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | | | |
| \hat{E}_s / N_{oc} | dB | 4.54 | 2.66 | -3 | -3 |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-SINR, SS-RSRP, and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> | | | | | |

Table A.5.7.3.1.2-3: SS-SINR Intra frequency OTA related test parameters

| Parameter | Unit | Test 1 | | Test 2 | |
|---|--------------------------------------|--------------------------------------|--------|--------------------------------------|--------|
| | | Cell 2 | Cell 3 | Cell 2 | Cell 3 |
| Angle of arrival configuration | | Setup 1 according to clause A.3.15.1 | | Setup 1 according to clause A.3.15.1 | |
| Assumption for UE beams ^{Note 9} | | Rough | | Rough | |
| N_{oc} ^{Note1} | dBm/15kHz ^{Note4} | -105 | | -105 | |
| N_{oc} ^{Note1} | dBm/SCS ^{Note3} | -96 | | -96 | |
| SS-RSRP ^{Note2} | dBm/SCS ^{Note4} | -91.46 | -93.34 | -99 | -99 |
| SS-SINR ^{Note2} | dB | 0 | -3.2 | -4.76 | -4.76 |
| \hat{E}_s / I_{ot} | dB | 0 | -3.2 | -4.76 | -4.76 |
| I_o ^{Note2} | dBm/95.04 MHz ^{Note4} | -59.2 | | -64 | |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-SINR, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone</p> <p>Note 6: NR operating band groups are as defined in Clause 3.5.2.</p> <p>Note 7: Void</p> <p>Note 8: Void</p> <p>Note 9: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation</p> | | | | | |

A.5.7.3.1.3 Test Requirements

The SS-SINR absolute measurement accuracy in test 1 shall be within the range Nominal SS-SINR+3B to Nominal SS-SINR -4dB and the SS-SINR measurement accuracy in test 2 shall be within the range Nominal SS-SINR +3.5dB to Nominal SS-SINR -4.5dB according to the requirements in clause 10.1.10.13.1 with an additional -1dB margin reflecting the possible impact of UE self noise in the test. Nominal SS-SINR is the value shown in table A.5.7.3.1.2-3.

The SS-SINR relative measurement accuracy shall fulfil the requirements in clause 10.1.13.1.1.

A.5.7.3.2 EN-DC Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.5.7.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.15.1.1 and 10.1.15.1.2 for inter-frequency measurement.

A.5.7.3.2.2 Test Parameters

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.5.7.3.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test setup in Table A.5.7.3.2.2-2 and Table A.5.7.3.2.2-3. In all test cases, Cell 2 is the PSCell and Cell 3 is target cell. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.5.7.3.2.2-2: SS-SINR Inter frequency SS-SINR supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |

Table A. 5.7.3.2.2-2: SS-SINR Inter frequency general test parameters

| Parameter | Unit | Test 1 | | Test 2 | | Test 3 | |
|-----------|------|--------|--------|--------|--------|--------|--------|
| | | Cell 2 | Cell 3 | Cell 2 | Cell 3 | Cell 2 | Cell 3 |

| SSB ARFCN | | Freq1 | freq2 | freq1 | Freq2 | freq1 | Freq2 |
|--|--|-----------------------------|----------------|-----------------------------|----------------|-----------------------------|----------------|
| Duplex mode | | TDD | | TDD | | TDD | |
| TDD configuration | | TDDConf.3.1 | | TDDConf.3.1 | | TDDConf.3.1 | |
| BW _{channel} | MHz | 100: N _{RB,c} = 66 | | 100: N _{RB,c} = 66 | | 100: N _{RB,c} = 66 | |
| Downlink initial BWP configuration | | DLBWP.0.1 | | | | | |
| Downlink dedicated BWP configuration | | DLBWP.1.1 | | | | | |
| Uplink initial BWP configuration | | ULBWP.0.1 | | | | | |
| Uplink dedicated BWP configuration | | ULBWP.1.1 | | | | | |
| DRX cycle configuration | ms | Not applicable | | | | | |
| TRS configuration | | TRS.2.1 TDD | | | | | |
| TCI state | | TCI.State.0 | | | | | |
| AoA setup | | Setup 3 defined in A.3.15 | | | | | |
| PDSCH Reference measurement channel | | SR.3.1 TDD | - | SR.3.1 TDD | - | SR.3.1 TDD | - |
| RMSI CORESET Reference Channel | | CR.3.1 TDD | - | CR.3.1 TDD | - | CR.3.1 TDD | - |
| OCNG Patterns | | OP.1 | OP.1 | OP.1 | OP.1 | OP.1 | OP.1 |
| SMTc configuration | | SMTc. 1 FR2 | SMTc. 1 FR2 | SMTc. 1 FR2 | SMTc. 1 FR2 | SMTc. 1 FR2 | SMTc. 1 FR2 |
| PDSCH/PDCCH subcarrier spacing | kHz | 120 | 120 | 120 | 120 | 120 | 120 |
| EPRE ratio of PSS to SSS | dB | 0 | 0 | 0 | 0 | 0 | 0 |
| EPRE ratio of PBCH_DMRS to SSS | | | | | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | | | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | | | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | | | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | | | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | | | | |
| \hat{E}_s / N_{oc} | dB | -0.5 | -0.5 | 11.0 | 11.0 | -3.0 | -3.0 |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | | |
| Note 3: | SS-SINR, SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | | |
| Note 4: | SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | | | | |

Table A.5.7.3.2.2-3: SS-SINR Inter frequency OTA related test parameters

| Parameter | Unit | Test 1 | | Test 2 | | Test 3 | |
|-----------|------|--------|--------|--------|--------|--------|--------|
| | | Cell 2 | Cell 3 | Cell 2 | Cell 3 | Cell 2 | Cell 3 |

| Angle of arrival configuration | degrees | Setup 1 according to A.3.15.1 | | Setup 1 according to A.3.15.1 | | Setup 1 according to A.3.15.1 | |
|--|--------------------------------|-------------------------------|-------|-------------------------------|-----|-------------------------------|------|
| Assumption for UE beams ^{Note 10} | | Rough | | Rough | | Rough | |
| N_{oc} ^{Note1} | dBm/15kHz ^{Note4} | -105 | | -105 | | -105 | |
| N_{oc} ^{Note1} | dBm/SCS ^{Note3} | -96 | | -96 | | -96 | |
| SS-RSRP ^{Note2} | dBm/SCS ^{Note4} | -96.5 | -96.5 | -85 | -85 | -99 | -99 |
| SS-SINR ^{Note2} | dB | -0.5 | -0.5 | 11 | 11 | -3.0 | -3.0 |
| \hat{E}_s/I_{ot} | dB | -0.5 | -0.5 | 11 | 11 | -3.0 | -3.0 |
| I_o ^{Note2} | dBm/95.04 MHz ^{Note4} | -69.3 | | -55.4 | | -65.24 | |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-SINR, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone</p> <p>Note 6: NR operating band groups are as defined in Clause 3.5.2.</p> <p>Note 7: Void</p> <p>Note 8: Void</p> <p>Note 9: Void</p> <p>Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation</p> | | | | | | | |

A.5.7.3.2.3 Test Requirements

The SS-SINR absolute measurement accuracy in test 1 shall be within the range Nominal SS-SINR+3dB to Nominal SS-SINR -4dB and the SS-SINR measurement accuracy in test 2 shall be within the range Nominal SS-SINR+3.5dB to Nominal SS-SINR -4.5dB according to the requirements in clause 10.1.15.1.1 with an additional -1dB margin reflecting the possible impact of UE self noise in the test. Nominal SS-SINR is the value shown in table A.5.7.2.2.2-3

The SS-SINR relative measurement accuracy shall fulfil the requirements in clause 10.1.15.1.2.

A.5.7.4 L1-RSRP measurement for beam reporting

A.5.7.4.1 SSB based L1-RSRP measurement

A.5.7.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 9.5.2 and clause 10.1.20.1 for L1-RSRP measurements based on SSB with the testing configurations for NR cells in Table A.5.7.4.1.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

Table A.5.7.4.1.1-1: Applicable NR configurations for FR2 SSB based L1-RSRP test

| Config | Description |
|--------|---|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations in each supported band |

A.5.7.4.1.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.7.4.1.2-1 and Table A.5.7.4.1.2-2 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.5.7.4.1.2-1 and Table A.5.7.4.1.2-2.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources. UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSB resources 0 and 1.

Table A.5.7.4.1.2-1: FR2 SSB based L1-RSRP general test parameters

| Parameter | Config | Unit | Test 1 | Test 2 |
|---|--------|------|-----------------------------|-----------------------------|
| SSB GSCN | 1~4 | | freq1 | freq1 |
| Duplex mode | 1~4 | | TDD | TDD |
| TDD Configuration | 1~4 | | TDDConf.3.1 | TDDConf.3.1 |
| BW _{channel} | 1~4 | MHz | 100: N _{RB,c} = 66 | 100: N _{RB,c} = 66 |
| PDSCH Reference measurement channel | 1~4 | | SR.3.1 TDD | SR.3.1 TDD |
| RMSI CORESET Reference Channel | 1~4 | | CR.3.1 TDD | CR.3.1 TDD |
| Dedicated CORESET Reference Channel | 1~4 | | CCR.3.1 TDD | CCR.3.1 TDD |
| SSB configuration | 1,2 | | SSB.1 FR2 | SSB.1 FR2 |
| | 3,4 | | SSB.2 FR2 | SSB.2 FR2 |
| OCNG Patterns | 1~4 | | OP.1 | OP.1 |
| Initial BWP Configuration | 1~4 | | DLBWP.0.1 | DLBWP.0.1 |
| | | | ULBWP.0.1 | ULBWP.0.1 |
| Dedicated BWP configuration | 1~4 | | DLBWP.1.3 | DLBWP.1.3 |
| | | | ULBWP.1.3 | ULBWP.1.3 |
| TRS Configuration | 1~4 | | TRS.2.1 TDD | TRS.2.1 TDD |
| PDCCH/PDSCH TCI Configuration | 1~4 | | TCI.State.2 | TCI.State.2 |
| SMTTC configuration | 1~4 | | SMTTC.1 | SMTTC.1 |
| reportConfigType | 1~4 | | periodic | periodic |
| reportQuantity | 1~4 | | ssb-Index-RSRP | ssb-Index-RSRP |
| Number of reported RS | 1~4 | | 2 | 2 |
| L1-RSRP reporting period | 1~4 | | slot640 | slot640 |
| Propagation condition | 1~4 | | AWGN | AWGN |
| Antenna configuration | | | 1x2 | 1x2 |
| EPRE ratio of PSS to SSS | 1~4 | dB | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> | | | | |

Table A.5.7.4.1.2-2: FR2 SSB based L1-RSRP OTA related test parameters

| Parameter | Config | Unit | Test 1 | | Test 2 ^{NOTE 3} | |
|--|--------|---------------|-------------------------------|------|-------------------------------|------|
| | | | SSB0 | SSB1 | SSB0 | SSB1 |
| Angle of arrival configuration | | | Setup 1 according to A.3.15.1 | | Setup 1 according to A.3.15.1 | |
| Assumption for UE beams ^{Note 4} | | | Rough | | Rough | |
| N_{oc} | 1~4 | dBm/15 kHz | -100 | | n.a. | |
| N_{oc} | 1,2 | dBm/SS | -91 | | n.a. | |
| | 3,4 | B SCS | -88 | | n.a. | |
| \hat{E}_s / I_{ot} | 1~4 | dB | 10 | -2 | n.a. | |
| SS-RSRP ^{Note 1} | 1,2 | dBm/SC | -81 | -93 | As in Table B.2.4-2 | |
| | 3,4 | S | -78 | -90 | As in Table B.2.4-2 | |
| I_o ^{Note 1} | 1~4 | dBm/95.04M Hz | -51.57 | | SS-RSRP+28.98 | |
| \hat{E}_s / N_{oc} | 1~4 | dB | 10 | -2 | n.a. | |
| <p>Note 1: RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 3: No additional noise is added by the test system in Test 2.</p> <p>Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation</p> | | | | | | |

A.5.7.4.1.3 Test Requirements

After 640ms from the beginning of the test, the L1-RSRP measurement accuracy for SSB#0 and SSB#1 of Cell 2 shall fulfil the requirements in clauses 10.1.20.1. The following requirements are to be verified:

For Test 1:

Absolute accuracy of SSB0 and absolute accuracy of SSB1. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.5.7.4.1.3-1.

Relative accuracy of SSB0 compared with SSB1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.1.2-1.

For Test 2:

Absolute accuracy of SSB0 and absolute accuracy of SSB1. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.5.7.4.1.3-1.

Relative accuracy of SSB0 compared with SSB1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.1.2-1.

Table A.5.7.4.1.3-1: L1-RSRP absolute accuracy test requirement

| | Test requirement ^{Notes 1,2,3} |
|---------|--|
| SSB0 | $SSB_RP0 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP0 + \delta + G_{max}$ |
| SSB1 | $SSB_RP1 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP1 + \delta + G_{max}$ |
| Note 1: | SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the SSB n under consideration |
| Note 2: | δ is the RSRP absolute accuracy requirement from Table 10.1.20.1.1-1, selected according to the l_0 used in the test |
| Note 3: | G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class |

A.5.7.4.2 CSI-RS based L1-RSRP measurement on resource set with repetition off

A.5.7.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 9.5.3 and clause 10.1.20.2 for L1-RSRP measurements based on CSI-RS with the testing configurations for NR cells in Table A.5.7.4.2.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

Table A.5.7.4.2.1-1: Applicable NR configurations for FR2 CSI-RS based L1-RSRP test

| Config | Description |
|---------------|---|
| 1 | LTE FDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations in each supported band |

A.5.7.4.2.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.7.4.2.2-1 and Table A.5.7.4.2.2-2 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.5.7.4.2.2-1 and Table A.5.7.4.2.2-2.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB.

Table A.5.7.4.2.2-1: FR2 CSI-RS based L1-RSRP general test parameters

| Parameter | Config | Unit | Test 1 | Test 2 |
|--|--------|------|-----------------------------|-----------------------------|
| SSB GSCN | 1~2 | | freq1 | freq1 |
| Duplex mode | 1~2 | | TDD | TDD |
| TDD Configuration | 1~2 | | TDDConf.3.1 | TDDConf.3.1 |
| BW _{channel} | 1~2 | MHz | 100: N _{RB,c} = 66 | 100: N _{RB,c} = 66 |
| PDSCH Reference measurement channel | 1~2 | | SR.3.1 TDD | SR.3.1 TDD |
| RMSI CORESET Reference Channel | 1~2 | | CR.3.1 TDD | CR.3.1 TDD |
| Dedicated CORESET Reference Channel | 1~2 | | CCR.3.1 TDD | CCR.3.1 TDD |
| SSB configuration | 1~2 | | SSB.1 FR2 | SSB.1 FR2 |
| OCNG Patterns | 1~2 | | OP.1 | OP.1 |
| Initial BWP Configuration | 1~2 | | DLBWP.0.1 ULBWP.0.1 | DLBWP.0.1 ULBWP.0.1 |
| Dedicated BWP configuration | 1~2 | | DLBWP.1.1 ULBWP.1.1 | DLBWP.1.1 ULBWP.1.1 |
| TRS Configuration | 1~2 | | TRS.2.1 TDD | TRS.2.1 TDD |
| PDCCH/PDSCH TCI Configuration | 1~2 | | TCI.State.2 | TCI.State.2 |
| SMTC configuration | 1~2 | | SMTC.1 | SMTC.1 |
| CSI-RS | 1~2 | | CSI-RS.3.2 TDD | CSI-RS.3.2 TDD |
| reportConfigType | 1~2 | | periodic | periodic |
| reportQuantity | 1~2 | | cri-RSRP | cri-RSRP |
| Number of reported RS | 1~2 | | 2 | 2 |
| L1-RSRP reporting period | 1~2 | | slot640 | slot640 |
| Propagation condition | 1~2 | | AWGN | AWGN |
| Antenna configuration | 1~2 | | 1x2 | 1x2 |
| EPRE ratio of PSS to SSS | 1~2 | dB | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | | |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | |
| Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | |

Table A.5.7.4.2.2-2: FR2 CSI-RS based L1-RSRP OTA related test parameters

| Parameter | Config | Unit | Test 1 | | Test 2 ^{NOTE 3} | |
|--|--------|---------------|-------------------------------|---------|-------------------------------|---------|
| | | | CSI-RS0 | CSI-RS1 | CSI-RS0 | CSI-RS1 |
| Angle of arrival configuration | | | Setup 1 according to A.3.15.1 | | Setup 1 according to A.3.15.1 | |
| Assumption for UE beams ^{Note 4} | | | Rough | | Rough | |
| N_{oc} | 1~2 | dBm/15 kHz | -100 | | n.a. | |
| N_{oc} | 1~2 | dBm/SS B SCS | -91 | | n.a. n.a. | |
| \hat{E}_s / I_{ot} | 1~2 | dB | 10 | -2 | n.a. | |
| CSI-RS-RSRP ^{Note 1} | 1~2 | dBm/SC S | -81 | -93 | As in Table B.2.4-2 | |
| l_o ^{Note 1} | 1~2 | dBm/95.04M Hz | -59.86 | | SS-RSRP+28.98 | |
| \hat{E}_s / N_{oc} | 1~2 | dB | -51.57 | -2 | n.a. | |
| <p>Note 1: RSRP and l_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 3: No additional noise is added by the test system in Test 2.</p> <p>Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation</p> | | | | | | |

A.5.7.4.2.3 Test Requirements

After 640ms from the beginning of the test, the L1-RSRP measurement accuracy for CSI-RS#0 and CSI-RS#1 of Cell 2 shall fulfil the requirements in clauses 10.1.20.2. The following requirements are to be verified:

For Test 1:

Absolute accuracy of CSI-RS0 and absolute accuracy of CSI-RS1. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.5.7.4.2.3-1.

Relative accuracy of CSI-RS0 compared with CSI-RS1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

For Test 2:

Absolute accuracy of CSI-RS0 and absolute accuracy of CSI-RS1. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.5.7.4.2.3-1.

Relative accuracy of CSI-RS0 compared with CSI-RS1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

Table A.5.7.4.2.3-1: L1-RSRP absolute accuracy test requirement

| | Test requirement ^{Notes 1,2,3} |
|---------|--|
| CSI-RS0 | $\text{CSI-RS_RP0} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{CSI-RS_RP0} + \delta + G_{\max}$ |
| CSI-RS1 | $\text{CSI-RS_RP1} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{CSI-RS_RP1} + \delta + G_{\max}$ |
| Note 1: | CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration |
| Note 2: | δ is the RSRP absolute accuracy requirement from Table 10.1.20.2.1-1, selected according to the l_0 used in the test |
| Note 3: | G_{\min} and G_{\max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class |

A.5.8 Void

A.6 NR standalone tests with all NR cells in FR1

A.6.1 SA: RRC_IDLE state mobility

A.6.1.1 Cell re-selection to NR

A.6.1.1.1 Cell reselection to FR1 intra-frequency NR case

A.6.1.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements specified in clause 4.2.2.3.

A.6.1.1.1.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.6.1.1.1.2-1, A.6.1.1.1.2-2 and A.6.1.1.1.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.6.1.1.1.2-1: Supported test configurations

| Configuration | Description |
|---|---|
| 1 | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations. | |

Table A.6.1.1.1.2-2: General test parameters for intra frequency NR cell re-selection test case

| Parameter | | Unit | Test configuration | Value | Comment |
|----------------------------|-----------------|------|--------------------|----------------|--|
| Initial condition | Active cell | | 1, 2, 3 | Cell1 | |
| | Neighbour cells | | 1, 2, 3 | Cell2 | |
| T2 end condition | Active cell | | 1, 2, 3 | Cell2 | |
| | Neighbour cells | | 1, 2, 3 | Cell1 | |
| Final condition | Active cell | | 1, 2, 3 | Cell1 | |
| RF Channel Number | | | 1, 2, 3 | 1 | |
| Time offset between cells | | | 1 | 3 ms | Asynchronous cells |
| | | | 2 | 3 μ s | Synchronous cells |
| | | | 3 | 3 μ s | Synchronous cells |
| Access Barring Information | | - | 1, 2, 3 | Not Sent | No additional delays in random access procedure. |
| SSB configuration | | | 1 | SSB.1 FR1 | |
| | | | 2 | SSB.1 FR1 | |
| | | | 3 | SSB.2 FR1 | |
| SMTC configuration | | | 1 | SMTC pattern 2 | |
| | | | 2 | SMTC pattern 1 | |
| | | | 3 | SMTC pattern 1 | |

| | | | | |
|---------------------------|---|---------|----------------|---|
| DRX cycle length | s | 1, 2, 3 | 1.28 | The value shall be used for all cells in the test. |
| PRACH configuration index | | 1, 2, 3 | 102 | The detailed configuration is specified in TS 38.211 clause 6.3.3.2 |
| rangeToBestCell | | 1, 2, 3 | Not configured | |
| T1 | s | 1, 2, 3 | >7 | During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2 |
| T2 | s | 1, 2, 3 | 40 | T2 needs to be defined so that cell re-selection reaction time is taken into account. |
| T3 | s | 1, 2, 3 | 15 | T3 needs to be defined so that cell re-selection reaction time is taken into account. |

Table A.6.1.1.1.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case in AWGN

| Parameter | Unit | Test configuration | Cell 1 | | | Cell 2 | | |
|--|--|--------------------|-------------------------|--------|--------|-----------------------------|------|-------|
| | | | T1 | T2 | T3 | T1 | T2 | T3 |
| TDD configuration | | 1 | N/A | | | N/A | | |
| | | 2 | TDDConf.1.1 | | | TDDConf.1.1 | | |
| | | 3 | TDDConf.2.1 | | | TDDConf.2.1 | | |
| PDSCH RMC configuration | | 1 | SR.1.1 FDD | | | N/A | | |
| | | 2 | SR.1.1 TDD | | | | | |
| | | 3 | SR.2.1 TDD | | | | | |
| RMSI CORESET RMC configuration | | 1 | CR.1.1 FDD | | | CR.1.1 FDD | | |
| | | 2 | CR.1.1 TDD | | | CR.1.1 TDD | | |
| | | 3 | CR.2.1 TDD | | | CR.2.1 TDD | | |
| Dedicated CORESET RMC configuration | | 1 | CCR.1.1 FDD | | | CCR.1.1 FDD | | |
| | | 2 | CCR.1.1 TDD | | | CCR.1.1 TDD | | |
| | | 3 | CCR.2.1 TDD | | | CCR.2.1 TDD | | |
| OCNG Pattern | | 1, 2, 3 | OP.1 defined in A.3.2.1 | | | OP.1 defined in A.3.2.1 | | |
| Initial DL BWP configuration | | 1, 2, 3 | DLBWP.0.1 | | | DLBWP.0.1 | | |
| Initial UL BWP configuration | | 1, 2, 3 | ULBWP.0.1 | | | ULBWP.0.1 | | |
| RLM-RS | | 1, 2, 3 | SSB | | | SSB | | |
| Qrxlevmin | dBm/SCS | 1, 2 | -140 | | | -140 | | |
| | | 3 | -137 | | | -137 | | |
| Pcompensation | dB | 1, 2, 3 | 0 | | | 0 | | |
| Qhysts | dB | 1, 2, 3 | 0 | | | 0 | | |
| Qoffsets _{s, n} | dB | 1, 2, 3 | 0 | | | 0 | | |
| Cell_selection_and_reselection_quality_measurement | | 1, 2, 3 | SS-RSRP | | | SS-RSRP | | |
| \hat{E}_s / I_{ot} | dB | 1 | 16 | -3.11 | 2.79 | -infinity | 2.79 | -3.11 |
| | | 2 | | | | | | |
| | | 3 | | | | | | |
| N_{oc} ^{Note2} | dBm/SCS | 1 | -98 | | | | | |
| | | 2 | -98 | | | | | |
| | | 3 | -95 | | | | | |
| N_{oc} ^{Note2} | dBm/15 kHz | 1 | -98 | | | | | |
| | | 2 | | | | | | |
| | | 3 | | | | | | |
| \hat{E}_s / N_{oc} | dB | 1 | 16 | 13 | 16 | -infinity | 16 | 13 |
| | | 2 | | | | | | |
| | | 3 | | | | | | |
| SS-RSRP ^{Note3} | dBm/SCS | 1 | -82 | -85 | -82 | -infinity | -82 | -85 |
| | | 2 | -82 | -85 | -82 | -infinity | -82 | -85 |
| | | 3 | -79 | -82 | -79 | -infinity | -79 | -82 |
| I _o | dBm/9.36 MHz | 1 | -53.94 | -52.21 | -52.21 | pecified in Cell 1 columns- | | |
| | dBm/9.36 MHz | 2 | -53.94 | -52.21 | -52.21 | | | |
| | dBm/38.16 MHz | 3 | -47.85 | -46.12 | -46.12 | | | |
| Treselection | s | 1, 2, 3 | 0 | 0 | 0 | 0 | 0 | 0 |
| Sintrasearch | dB | 1, 2, 3 | N50 | | | N50 | | |
| Propagation Condition | | 1, 2, 3 | AWGN | | | | | |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | | | |
| Note 3: | SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | | | |

A.6.1.1.1.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than 34 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to an already detected cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{\text{detect, NR_Intra}} + T_{\text{SI-NR}}$, and to an already detected cell can be expressed as: $T_{\text{evaluate, NR_intra}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{detect, NR_Intra}}$ See Table 4.2.2.3-1 in clause 4.2.2.3

$T_{\text{evaluate, NR_intra}}$ See Table 4.2.2.3-1 in clause 4.2.2.3

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case.

This gives a total of 33.28 s, allow 34 s for the cell re-selection delay to a newly detectable cell and 7.68 s for the cell re-selection delay to an already detected cell in the test case, which we allow 8 s.

A.6.1.1.2 Cell reselection to FR1 inter-frequency NR case

A.6.1.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2.2.4.

A.6.1.1.2.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.6.1.1.2.2-1, A.6.1.1.2.2-2 and A.6.1.1.2.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

Table A.6.1.1.2.2-1: Supported test configurations

| Configuration | Description of serving cell | Description of target cell |
|---------------|---|---|
| 1 | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations. | |

Table A.6.1.1.2.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case

| Parameter | | Unit | Test configuration | Value | Comment |
|----------------------------|-----------------|------|--------------------|----------------|--|
| Initial condition | Active cell | | 1, 2, 3 | Cell2 | The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1 |
| T1 end condition | Active cell | | 1, 2, 3 | Cell1 | The UE shall perform reselection to cell 1 during T1 |
| | Neighbour cells | | 1, 2, 3 | Cell2 | |
| T3 end condition | Active cell | | 1, 2, 3 | Cell2 | The UE shall perform reselection to cell 2 with higher priority during T3 |
| RF Channel Number | | | 1, 2, 3 | 1, 2 | |
| Time offset between cells | | | 1 | 3 ms | Asynchronous cells |
| | | | 2 | 3 μ s | Synchronous cells |
| | | | 3 | 3 μ s | Synchronous cells |
| Access Barring Information | | - | 1, 2, 3 | Not Sent | No additional delays in random access procedure. |
| SSB configuration | | | 1 | SSB.1 FR1 | |
| | | | 2 | SSB.1 FR1 | |
| | | | 3 | SSB.2 FR1 | |
| SMTC configuration | | | 1 | SMTC pattern 2 | |
| | | | 2 | SMTC pattern 1 | |
| | | | 3 | SMTC pattern 1 | |
| DRX cycle length | | s | 1, 2, 3 | 1.28 | The value shall be used for all cells in the test. |
| PRACH configuration index | | | 1, 2, 3 | 102 | The detailed configuration is specified in TS 38.211 clause 6.3.3.2 |
| rangeToBestCell | | | 1, 2, 3 | Not configured | |
| T1 | | s | 1, 2, 3 | 15 | T1 needs to be defined so that cell re-selection reaction time is taken into account. |
| T2 | | s | 1, 2, 3 | >7 | During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3. |
| T3 | | s | 1, 2, 3 | 75 | T3 needs to be defined so that cell re-selection reaction time is taken into account. |

Table A.6.1.1.2.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN

| Parameter | Unit | Test configuration | Cell 1 | | | Cell 2 | | |
|--------------------------------|------|--------------------|-------------|----|----|-------------|----|----|
| | | | T1 | T2 | T3 | T1 | T2 | T3 |
| TDD configuration | | 1 | N/A | | | N/A | | |
| | | 2 | TDDConf.1.1 | | | TDDConf.1.1 | | |
| | | 3 | TDDConf.2.1 | | | TDDConf.2.1 | | |
| PDSCH RMC configuration | | 1 | SR.1.1 FDD | | | N/A | | |
| | | 2 | SR.1.1 TDD | | | | | |
| | | 3 | SR.2.1 TDD | | | | | |
| RMSI CORESET RMC configuration | | 1 | CR.1.1 FDD | | | CR.1.1 FDD | | |
| | | 2 | CR.1.1 TDD | | | CR.1.1 TDD | | |
| | | 3 | CR.2.1 TDD | | | CR.2.1 TDD | | |

| | | | | | | | | |
|--|--|---------|-------------------------|--------|--------|-------------------------|-----------|--------|
| Dedicated CORESET RMC configuration | | 1 | CCR.1.1 FDD | | | CCR.1.1 FDD | | |
| | | 2 | CCR.1.1 TDD | | | CCR.1.1 TDD | | |
| | | 3 | CCR.2.1 TDD | | | CCR.2.1 TDD | | |
| OCNG Pattern | | 1, 2, 3 | OP.1 defined in A.3.2.1 | | | OP.1 defined in A.3.2.1 | | |
| Initial DL BWP configuration | | 1, 2, 3 | DLBWP.0.1 | | | DLBWP.0.1 | | |
| Initial UL BWP configuration | | 1, 2, 3 | ULBWP.0.1 | | | ULBWP.0.1 | | |
| RLM-RS | | 1, 2, 3 | SSB | | | SSB | | |
| Qrxlevmin | dBm/SCS | 1, 2 | -140 | | | -140 | | |
| | | 3 | -137 | | | -137 | | |
| | | | 0 | | | 0 | | |
| Pcompensation | dB | 1, 2, 3 | 0 | | | 0 | | |
| Qhysts | dB | 1, 2, 3 | 0 | | | 0 | | |
| Qoffset _{s, n} | dB | 1, 2, 3 | 0 | | | 0 | | |
| Cell_selection_and_reselection_quality_measurement | | 1, 2, 3 | SS-RSRP | | | SS-RSRP | | |
| \hat{E}_s / I_{ot} | dB | 1 | 14 | 14 | 14 | -4 | -infinity | 12 |
| | | 2 | | | | | | |
| | | 3 | | | | | | |
| N_{oc} Note2 | dBm/SCS | 1 | -98 | | | | | |
| | | 2 | -98 | | | | | |
| | | 3 | -95 | | | | | |
| N_{oc} Note2 | dBm/15 kHz | 1 | -98 | | | | | |
| | | 2 | | | | | | |
| | | 3 | | | | | | |
| \hat{E}_s / N_{oc} | dB | 1 | 14 | 14 | 14 | -4 | -infinity | 12 |
| | | 2 | | | | | | |
| | | 3 | | | | | | |
| SS-RSRP Note3 | dBm/SCS | 1 | -84 | -84 | -84 | -102 | -infinity | -86 |
| | | 2 | -84 | -84 | -84 | -102 | -infinity | -86 |
| | | 3 | -81 | -81 | -81 | -99 | -infinity | -83 |
| I _o | dBm/9.36 MHz | 1 | -55.88 | -55.88 | -55.88 | -68.60 | -infinity | -57.78 |
| | dBm/9.36 MHz | 2 | -55.88 | -55.88 | -55.88 | -68.60 | -infinity | -57.78 |
| | dBm/38.16 MHz | 3 | -49.79 | -49.79 | -49.79 | -62.50 | -infinity | -51.69 |
| Treselection | s | 1, 2, 3 | 0 | 0 | 0 | 0 | 0 | 0 |
| Snoninrasearch | dB | 1, 2, 3 | 50 | | | Not sent | | |
| Thresh _{x, high} | dB | 1, 2, 3 | 48 | | | 48 | | |
| Thresh _{servng, low} | dB | 1, 2, 3 | 44 | | | 44 | | |
| Thresh _{x, low} | dB | 1, 2, 3 | 50 | | | 50 | | |
| Propagation Condition | | 1, 2, 3 | AWGN | | | | | |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | | | |
| Note 3: | SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | | | |

A.6.1.1.2.3 Test Requirements

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps again on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{\text{higher_priority_search}} + T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$, and to a lower priority cell can be expressed as: $T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$.

Where:

| | |
|---------------------------------------|---|
| $T_{\text{higher_priority_search}}$ | See clause 4.2.2.7 |
| $T_{\text{evaluate, NR_inter}}$ | See Table 4.2.2.4-1 in clause 4.2.2.4 |
| $T_{\text{SI-NR}}$ | Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case. |

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority cell and 7.68 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 8 s.

A.6.1.2 Inter-RAT E-UTRAN cell re-selection

A.6.1.2.1 Cell reselection to higher priority E-UTRAN

A.6.1.2.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection requirements specified in clause 4.2.2.5 when the E-UTRAN cell is of higher priority.

A.6.1.2.1.2 Test Parameters

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A.6.1.2.1.2-1, A.6.1.2.1.2-2, A.6.1.2.1.2-3 and A.6.1.2.1.2-4. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. NR cell 1 is already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of higher priority than cell 1.

Table A.6.1.2.1.2-1: Supported test configurations

| Configuration | Description of serving cell | Description of target cell |
|---------------|---|---------------------------------------|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | LTE 10 MHz bandwidth, TDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | LTE 10 MHz bandwidth, TDD duplex mode |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | LTE 10 MHz bandwidth, TDD duplex mode |
| 4 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | LTE 10 MHz bandwidth, FDD duplex mode |
| 5 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | LTE 10 MHz bandwidth, FDD duplex mode |
| 6 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | LTE 10 MHz bandwidth, FDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations. | |

Table A.6.1.2.1.2-2: General test parameters for NR to E-UTRAN cell re-selection test case

| Parameter | | Unit | Test configuration | Value | Comment |
|-----------------------------------|-----------------|------|--------------------|----------|--|
| Initial condition | Active cell | | 1, 2, 3, 4, 5, 6 | Cell1 | The UE camps on cell 1 in the initial phase and during T2 period the UE reselects to cell 2. |
| T2 end condition | Active cell | | 1, 2, 3, 4, 5, 6 | Cell2 | The UE shall perform reselection to cell 2 during T2. |
| | Neighbour cells | | 1, 2, 3, 4, 5, 6 | Cell1 | |
| T3 end condition | Active cell | | 1, 2, 3, 4, 5, 6 | Cell1 | The UE shall perform reselection to cell 1 during T3 for iteration of the tests. |
| | Neighbour cells | | 1, 2, 3, 4, 5, 6 | Cell2 | |
| Access Barring Information | | - | 1, 2, 3, 4, 5, 6 | Not Sent | No additional delays in random access procedure. |
| DRX cycle length | | s | 1, 2, 3, 4, 5, 6 | 1.28 | The value shall be used for all cells in the test. |
| NR PRACH configuration index | | | 1, 2, 3, 4, 5, 6 | 102 | The detailed configuration is specified in TS 38.211 clause 6.3.3.2 |
| E-UTRAN PRACH configuration index | | | 1, 2, 3 | 53 | As specified in table 5.7.1-2 in TS 36.211 [23] |
| | | | 4, 5, 6 | 4 | |
| T1 | | s | 1, 2, 3, 4, 5, 6 | >7 | During T1, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T2. |
| T2 | | s | 1, 2, 3, 4, 5, 6 | 75 | T2 needs to be defined so that cell re-selection reaction time is taken into account. |
| T3 | | s | 1, 2, 3, 4, 5, 6 | 15 | T3 needs to be defined so that cell re-selection reaction time is taken into account. |

Table A.6.1.2.1.2-3: Cell specific test parameters for NR cell 1

| Parameter | Unit | Test configuration | Cell 1 | | |
|------------------------------|------|--------------------|----------------|----|----|
| | | | T1 | T2 | T3 |
| TDD configuration | | 1, 4 | N/A | | |
| | | 2, 5 | TDDConf.1.1 | | |
| | | 3, 6 | TDDConf.2.1 | | |
| PDSCH parameters | | 1, 4 | SR.1.1 FDD | | |
| | | 2, 5 | SR.1.1 TDD | | |
| | | 3, 6 | SR.2.1 TDD | | |
| RMSI CORESET parameters | | 1, 4 | CR.1.1 FDD | | |
| | | 2, 5 | CR.1.1 TDD | | |
| | | 3, 6 | CR.2.1 TDD | | |
| Dedicated CORESET parameters | | 1, 4 | CCR.1.1 FDD | | |
| | | 2, 5 | CCR.1.1 TDD | | |
| | | 3, 6 | CCR.2.1 TDD | | |
| SSB parameters | | 1, 4 | SSB.1 FR1 | | |
| | | 2, 5 | SSB.1 FR1 | | |
| | | 3, 6 | SSB.2 FR1 | | |
| NR SMTC parameters | | 1, 4 | SMTC pattern 2 | | |
| | | 2, 5 | SMTC pattern 1 | | |
| | | 3, 6 | SMTC pattern 1 | | |

| | | | | | |
|---|---------------|------------------|-------------------------|--------|--------|
| OCNG Pattern | | 1, 2, 3, 4, 5, 6 | OP.1 defined in A.3.2.1 | | |
| Initial DL BWP configuration | | 1, 2, 3, 4, 5, 6 | DLBWP.0 | | |
| Initial UL BWP configuration | | 1, 2, 3, 4, 5, 6 | ULBWP.0 | | |
| RLM-RS | | 1, 2, 3, 4, 5, 6 | SSB | | |
| Qrxlevmin | dBm/SCS | 1, 2, 4, 5 | -140 | | |
| | | 3, 6 | -137 | | |
| N_{oc} | dBm/SCS | 1, 4 | -98 | | |
| | | 2, 5 | -98 | | |
| | | 3, 6 | -95 | | |
| N_{oc} | dBm/15 kHz | 1, 2, 3, 4, 5, 6 | -98 | | |
| SS-RSRP | dBm/SCS | 1, 4 | -84 | -84 | -84 |
| | | 2, 5 | -84 | -84 | -84 |
| | | 3, 6 | -81 | -81 | -81 |
| \hat{E}_s / I_{α} | dB | 1, 4 | 14 | 14 | 14 |
| | | 2, 5 | | | |
| | | 3, 6 | | | |
| \hat{E}_s / N_{oc} | dB | 1, 4 | 14 | 14 | 14 |
| | | 2, 5 | | | |
| | | 3, 6 | | | |
| Io | dBm/9.36 MHz | 1, 4 | -55.88 | -55.88 | -55.88 |
| | dBm/9.36 MHz | 2, 5 | -55.88 | -55.88 | -55.88 |
| | dBm/38.16 MHz | 3, 6 | -49.79 | -49.79 | -49.79 |
| Treselection | S | 1, 2, 3, 4, 5, 6 | 0 | | |
| Snointrasearch | dB | 1, 2, 3, 4, 5, 6 | 50 | | |
| Thresh _{x, high} (Note 2) | dB | 1, 2, 3, 4, 5, 6 | 48 | | |
| Thresh _{serv, low} | dB | 1, 2, 3, 4, 5, 6 | 44 | | |
| Thresh _{x, low} | dB | 1, 2, 3, 4, 5, 6 | 50 | | |
| Propagation Condition | | 1, 2, 3, 4, 5, 6 | AWGN | | |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | |
| Note 2: This refers to the value of Thresh _{x, high} which is included in NR system information, and is a threshold for the E-UTRA target cell | | | | | |

Table A.6.1.2.1.2-4: Cell specific test parameters for E-UTRA cell 2

| Parameter | Unit | Cell 2 | | |
|--|------|---|----|----|
| | | T1 | T2 | T3 |
| E-UTRA RF Channel number | | 1 | | |
| BW _{channel} | MHz | 10 | | |
| OCNG Patterns defined in TS 36.133 [15] clause A.3.2 | | OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6 | | |
| PBCH_RA | dB | 0 | | |
| PBCH_RB | dB | | | |
| PSS_RA | dB | | | |
| SSS_RA | dB | | | |
| PCFICH_RB | dB | | | |
| PHICH_RA | dB | | | |
| PHICH_RB | dB | | | |
| PDCCH_RA | dB | | | |
| PDCCH_RB | dB | | | |
| PDSCH_RA | dB | | | |
| PDSCH_RB | dB | | | |
| OCNG_RA ^{Note 1} | dB | | | |
| OCNG_RB ^{Note 1} | dB | | | |

| | | | | |
|--|------------|-----------|-----|------|
| Qrxlevmin | dBm | -140 | | |
| N_{oc} | dBm/15 kHz | -98 | | |
| RSRP | dBm/15 KHz | -infinity | -86 | -102 |
| \hat{E}_s/I_{ot} | dB | -infinity | 12 | -4 |
| \hat{E}_s/N_{oc} | dB | -infinity | 12 | -4 |
| TreselectionEUTRAN | S | 0 | | |
| Snonintrasearch | dB | Not sent | | |
| Thresh _{x, high} (Note 2) | dB | 48 | | |
| Thresh _{serv, low} | dB | 44 | | |
| Thresh _{x, low} | dB | 50 | | |
| Propagation Condition | | AWGN | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: This refers to the value of Thresh_{x, high} which is included in E-UTRA system information, and is a threshold for the NR target cell</p> | | | | |

A.6.1.2.1.3 Test Requirements

The cell reselection delay to a higher priority E-UTRAN cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{\text{higher_priority_search}} + T_{\text{evaluate, E-UTRAN}} + T_{\text{SLE-UTRA}}$,

Where:

$T_{\text{higher_priority_search}}$ See clause 4.2.2.7

$T_{\text{evaluate, E-UTRAN}}$ See Table 4.2.2.5-1 in clause 4.2.2.5

$T_{\text{SLE-UTRA}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority E-UTRAN cell.

A.6.1.2.2 Cell reselection to lower priority E-UTRAN

A.6.1.2.2.1 Test Purpose and Environment

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection requirements specified in clause 4.2.2.5 when the E-UTRAN cell is of lower priority.

A.6.1.2.2.2 Test Parameters

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A.6.1.2.2.2-1, A.6.1.2.2.2-2, A.6.1.2.2.2-3 and A.6.1.2.2.2-4. The test consists of three successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1.

Table A.6.1.2.2-1: Supported test configurations

| Configuration | Description of serving cell | Description of target cell |
|---------------|--|---------------------------------------|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | LTE 10 MHz bandwidth, TDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | LTE 10 MHz bandwidth, TDD duplex mode |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | LTE 10 MHz bandwidth, TDD duplex mode |
| 4 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | LTE 10 MHz bandwidth, FDD duplex mode |
| 5 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | LTE 10 MHz bandwidth, FDD duplex mode |
| 6 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | LTE 10 MHz bandwidth, FDD duplex mode |

Note: The UE is only required to be tested in one of the supported test configurations.

Table A.6.1.2.2-2: General test parameters for NR to E-UTRAN cell re-selection test case

| Parameter | | Unit | Test configuration | Value | Comment |
|-----------------------------------|-----------------|------|--------------------|----------|---|
| Initial condition | Active cell | | 1, 2, 3, 4, 5, 6 | Cell1 | The UE camps on cell 1 in the initial phase. |
| T1 end condition | Active cell | | 1, 2, 3, 4, 5, 6 | Cell2 | The UE shall perform reselection to cell 2 during T1. |
| | Neighbour cells | | 1, 2, 3, 4, 5, 6 | Cell1 | |
| T2 end condition | Active cell | | 1, 2, 3, 4, 5, 6 | Cell1 | The UE shall perform reselection to cell 1 during T2 for iteration of the tests. |
| | Neighbour cells | | 1, 2, 3, 4, 5, 6 | Cell2 | |
| Access Barring Information | | - | 1, 2, 3, 4, 5, 6 | Not Sent | No additional delays in random access procedure. |
| DRX cycle length | | s | 1, 2, 3, 4, 5, 6 | 1.28 | The value shall be used for all cells in the test. |
| NR PRACH configuration index | | | 1, 2, 3, 4, 5, 6 | 102 | The detailed configuration is specified in TS 38.211 clause 6.3.3.2 |
| E-UTRAN PRACH configuration index | | | 1, 2, 3 | 53 | As specified in table 5.7.1-2 in TS 36.211 [23] |
| | | | 4, 5, 6 | 4 | |
| T1 | | s | 1, 2, 3, 4, 5, 6 | 15 | T1 needs to be defined so that cell re-selection reaction time is taken into account. |
| T2 | | s | 1, 2, 3, 4, 5, 6 | 75 | T2 needs to be defined so that cell re-selection reaction time is taken into account. |

Table A.6.1.2.2.2-3: Cell specific test parameters for NR cell 1

| Parameter | Unit | Test configuration | Cell 1 | |
|---|---------------|--------------------|-------------------------|--------|
| | | | T1 | T2 |
| TDD configuration | | 1, 4 | N/A | |
| | | 2, 5 | TDDConf.1.1 | |
| | | 3, 6 | TDDConf.2.1 | |
| PDSCH RMC configuration | | 1, 4 | SR.1.1 FDD | |
| | | 2, 5 | SR.1.1 TDD | |
| | | 3, 6 | SR.2.1 TDD | |
| RMSI CORESET RMC configuration | | 1, 4 | CR.1.1 FDD | |
| | | 2, 5 | CR.1.1 TDD | |
| | | 3, 6 | CR.2.1 TDD | |
| Dedicated CORESET RMC configuration | | 1, 4 | CCR.1.1 FDD | |
| | | 2, 5 | CCR.1.1 TDD | |
| | | 3, 6 | CCR.2.1 TDD | |
| SSB configuration | | 1, 4 | SSB.1 FR1 | |
| | | 2, 5 | SSB.1 FR1 | |
| | | 3, 6 | SSB.2 FR1 | |
| SMTC configuration | | 1, 4 | SMTC pattern 2 | |
| | | 2, 5 | SMTC pattern 1 | |
| | | 3, 6 | SMTC pattern 1 | |
| OCNG Pattern | | 1, 2, 3, 4, 5, 6 | OP.1 defined in A.3.2.1 | |
| Initial DL BWP configuration | | 1, 2, 3, 4, 5, 6 | DLBWP.0 | |
| Initial UL BWP configuration | | 1, 2, 3, 4, 5, 6 | ULBWP.0 | |
| RLM-RS | | 1, 2, 3, 4, 5, 6 | SSB | |
| Qrxlevmin | dBm/SCS | 1, 2, 4, 5 | -140 | |
| | | 3, 6 | -137 | |
| N_{oc} | dBm/SCS | 1, 4 | -98 | |
| | | 2, 5 | -98 | |
| | | 3, 6 | -95 | |
| N_{oc} | dBm/15 kHz | 1, 2, 3, 4, 5, 6 | -98 | |
| SS-RSRP | dBm/SCS | 1, 4 | -102 | -86 |
| | | 2, 5 | -102 | -86 |
| | | 3, 6 | -99 | -83 |
| \hat{E}_s / I_{ot} | dB | 1, 4 | -4 | 12 |
| | | 2, 5 | | |
| | | 3, 6 | | |
| \hat{E}_s / N_{oc} | dB | 1, 4 | -4 | 12 |
| | | 2, 5 | | |
| | | 3, 6 | | |
| Io | dBm/9.36 MHz | 1, 4 | -68.60 | -57.78 |
| | dBm/9.36 MHz | 2, 5 | -68.60 | -57.78 |
| | dBm/38.16 MHz | 3, 6 | -62.50 | -51.69 |
| Treselection | S | 1, 2, 3, 4, 5, 6 | 0 | |
| Snonintrasearch | dB | 1, 2, 3, 4, 5, 6 | 50 | |
| Thresh _{x, high} (Note 2) | dB | 1, 2, 3, 4, 5, 6 | 48 | |
| Thresh _{-serving, low} | dB | 1, 2, 3, 4, 5, 6 | 44 | |
| Thresh _{x, low} | dB | 1, 2, 3, 4, 5, 6 | 50 | |
| Propagation Condition | | 1, 2, 3, 4, 5, 6 | AWGN | |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | |
| Note 2: This refers to the value of Thresh _{x, high} which is included in NR system information, and is a threshold for the E-UTRA target cell | | | | |

Table A.6.1.2.2.2-4: Cell specific test parameters for E-UTRA cell 2

| Parameter | Unit | Cell 2 | |
|---|------------|---|----------|
| | | T1 | T2 T3 |
| E-UTRA RF Channel number | | 1 | |
| $BW_{channel}$ | MHz | 10 | |
| OCNG Patterns defined in TS 36.133 [15] clause A.3.2 | | OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6 | |
| PBCH_RA | dB | 0 | |
| PBCH_RB | dB | | |
| PSS_RA | dB | | |
| SSS_RA | dB | | |
| PCFICH_RB | dB | | |
| PHICH_RA | dB | | |
| PHICH_RB | dB | | |
| PDCCH_RA | dB | | |
| PDCCH_RB | dB | | |
| PDSCH_RA | dB | | |
| PDSCH_RB | dB | | |
| OCNG_RA ^{Note 1} | dB | | |
| OCNG_RB ^{Note 1} | dB | | |
| $Q_{rxlevmin}$ | dBm | -140 | |
| N_{oc} | dBm/15 kHz | -98 | |
| RSRP | dBm/15 KHz | -84 | -84 |
| \hat{E}_s / I_{ot} | dB | 14 | 14 |
| \hat{E}_s / N_{oc} | dB | 14 | 14 |
| $T_{reselectionEUTRAN}$ | S | 0 | |
| $S_{nonintrasearch}$ | dB | Not sent | |
| $Thresh_{x, high}$ (Note 2) | dB | 48 | |
| $Thresh_{serving, low}$ | dB | 44 | |
| $Thresh_{x, low}$ | dB | 50 | |
| Propagation Condition | | AWGN | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: This refers to the value of $Thresh_{x, high}$ which is included in E-UTRA system information, and is a threshold for the NR target cell</p> | | | |

A.6.1.2.2.3 Test Requirements

The cell reselection delay to a lower priority E-UTRAN cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate, E-UTRAN} + T_{SLE-UTRA}$,

Where:

$T_{\text{evaluate, E-UTRAN}}$ See Table 4.2.2.5-1 in clause 4.2.2.5

$T_{\text{SI-E-UTRA}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8 s for the cell re-selection delay to a lower priority E-UTRAN cell.

A.6.2 SA: RRC_INACTIVE state mobility

A.6.3 RRC_CONNECTED state mobility

A.6.3.1 Handover

A.6.3.1.1 Intra-frequency handover from FR1 to FR1; known target cell

A.6.3.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 intra frequency handover requirements specified in clause 6.1.1.2.

A.6.3.1.1.2 Test Parameters

Supported test configurations are shown in table A.6.3.1.1.2-1. Both handover delay and interruption length are tested by using the parameters in table A.6.3.1.1.2-2, and A.6.3.1.1.2-3.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2.

NR shall send a RRC message implying handover to cell 2. The RRC message implying handover shall be sent to the UE during period T2, after the UE has reported Event A3. T3 is defined as the end of the last TTI containing the RRC message implying handover.

Table A.6.3.1.1.2-1: Intra-frequency handover from FR1 to FR1 test configurations

| Config | Description |
|--------|--|
| 1 | Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.6.3.1.1.2-2: General test parameters Intra-frequency handover from FR1 to FR1

| Parameter | Unit | Value | Comment |
|----------------------------|-------------------|-----------|--|
| Initial conditions | Active cell | Cell 1 | |
| | Neighbouring cell | Cell 2 | |
| Final condition | Active cell | Cell 2 | |
| A3-Offset | dB | 0 | |
| Hysteresis | dB | 0 | |
| Time To Trigger | s | 0 | |
| Filter coefficient | | 0 | L3 filtering is not used |
| Access Barring Information | - | Not Sent | No additional delays in random access procedure. |
| Time offset between cells | | 3 μ s | Synchronous cells |
| T1 | s | 5 | |
| T2 | s | ≤ 5 | |

| | | | |
|----|---|---|--|
| T3 | s | 1 | |
|----|---|---|--|

Table A.6.3.1.1.2-3: Cell specific test parameters for NR FR1-FR1 Intra frequency handover test case

| Parameter | | Unit | Cell 1 | | | Cell 2 | | |
|--|------------------|-----------|-----------------------------|----|----|--------|----|----|
| | | | T1 | T2 | T3 | T1 | T2 | T3 |
| NR RF Channel Number | | | 1 | | | 1 | | |
| Duplex mode | Config 1 | | FDD | | | | | |
| | Config 2,3 | | TDD | | | | | |
| TDD configuration | Config 1 | | Not Applicable | | | | | |
| | Config 2 | | TDDConf.1.1 | | | | | |
| | Config 3 | | TDDConf.2.1 | | | | | |
| BW _{channel} | Config 1 | MHz | 10: N _{RB,c} = 52 | | | | | |
| | Config 2 | | 10: N _{RB,c} = 52 | | | | | |
| | Config 3 | | 40: N _{RB,c} = 106 | | | | | |
| BWP BW | Config 1 | MHz | 10: N _{RB,c} = 52 | | | | | |
| | Config 2 | | 10: N _{RB,c} = 52 | | | | | |
| | Config 3 | | 40: N _{RB,c} = 106 | | | | | |
| DRx Cycle | | ms | Not Applicable | | | | | |
| PDSCH Reference measurement channel | Config 1 | | SR.1.1 FDD | | | | | |
| | Config 2 | | SR.1.1 TDD | | | | | |
| | Config 3 | | SR2.1 TDD | | | | | |
| CORESET Reference Channel | Config 1 | | CR.1.1 FDD | | | | | |
| | Config 2 | | CR.1.1 TDD | | | | | |
| | Config 3 | | CR2.1 TDD | | | | | |
| TRS configuration | Config 1 | | TRS.1.1 FDD | | | | | |
| | Config 2 | | TRS.1.1 TDD | | | | | |
| | Config 3 | | TRS.1.2 TDD | | | | | |
| OCNG Patterns | | | OP.1 | | | | | |
| SMTTC Configuration | | | SMTTC.1 | | | | | |
| SSB Configuration | Config 1,2 | | SSB.1 FR1 | | | | | |
| | Config 3 | | SSB.2 FR1 | | | | | |
| PDSCH/PDCCH subcarrier spacing | Config 1,2 | kHz | 15 kHz | | | | | |
| | Config 3 | | 30 kHz | | | | | |
| PUCCH/PUSCH subcarrier spacing | Config 1,2 | kHz | 15 kHz | | | | | |
| | Config 3 | | 30 kHz | | | | | |
| PRACH configuration | | | FR1 PRACH configuration 1 | | | | | |
| BWP configuraiton | Initial DL BWP | | DLBWP.0.1 | | | | | |
| | Dedicated DL BWP | | DLBWP.1.1 | | | | | |
| | Initial UL BWP | | ULBWP.0.1 | | | | | |
| | Dedicated UL BWP | | ULBWP.1.1 | | | | | |
| EPRE ratio of PSS to SSS | | dB | 0 | | | | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | | | |
| N_{oc} ^{Note2} | | dBm/15kHz | -98 | | | | | |
| N_{oc} ^{Note2} | Config 1,2 | dBm/SCS | -98 | | | | | |
| | Config 3 | | -95 | | | | | |

| | | | | | | | | |
|--|------------|------------------|--------|--------|--------|--------|--------|--------|
| \hat{E}_s / I_{ot} | | dB | 8 | -3.3 | -3.3 | - | 2.36 | 2.36 |
| \hat{E}_s / N_{oc} | | dB | 8 | 8 | 8 | - | 11 | 11 |
| SSB_RP | Config 1,2 | dBm/SCS | -90 | -90 | -90 | - | -87 | -87 |
| | Config 3 | dBm/SCS | -87 | -87 | -87 | - | -84 | -84 |
| I_{o}^{Note3} | Config 1,2 | dBm/ 9.36MHz | -61.41 | -57.06 | -57.06 | -61.41 | -57.06 | -57.06 |
| | Config 3 | dBm/ 38.16MHz | -55.31 | -50.96 | -50.96 | -55.31 | -50.96 | -50.96 |
| Propagation condition | | - | AWGN | | | AWGN | | |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | | | |
| Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | | | | |
| Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | | | | |

A.6.3.1.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 220 ms from the beginning of time period T3. The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{\text{interrupt}}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{\text{interrupt}}$ = 210 ms in the test. $T_{\text{interrupt}}$ is defined in clause 6.1.1.2.2.

This gives a total of 220 ms.

A.6.3.1.2 Intra-frequency handover from FR1 to FR1; unknown target cell

A.6.3.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 intra frequency handover requirements specified in clause 6.1.1.2.

A.6.3.1.2.2 Test Parameters

Supported test configurations are shown in table A.6.3.1.2.2-1. Both handover delay and interruption length are tested by using the parameters in table A.6.3.1.2.2-2, and A.6.3.1.2.2-3.

The test scenario comprises of two cells on one carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.6.3.1.2.2-1: Intra-frequency handover from FR1 to FR1 test configurations

| Config | Description |
|--|--|
| 1 | Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations | |

Table A.6.3.1.2.2-2: General test parameters Intra-frequency handover from FR1 to FR1

| Parameter | Unit | Value | Comment |
|----------------------------|-------------------|-----------|--|
| Initial conditions | Active cell | Cell 1 | |
| | Neighbouring cell | Cell 2 | |
| Final condition | Active cell | Cell 2 | |
| Access Barring Information | - | Not Sent | No additional delays in random access procedure. |
| Time offset between cells | | 3 μ s | Synchronous cells |
| T1 | s | 5 | |
| T2 | s | ≤ 5 | |

Table A.6.3.1.2.2-3: Cell specific test parameters for NR FR1-FR1 Intra frequency handover test case

| Parameter | Unit | Cell 1 | | Cell 2 | |
|-------------------------------------|------------|-----------------------------|----|--------|----|
| | | T1 | T2 | T1 | T2 |
| NR RF Channel Number | | 1 | | 1 | |
| Duplex mode | Config 1 | FDD | | | |
| | Config 2,3 | TDD | | | |
| TDD configuration | Config 1 | Not Applicable | | | |
| | Config 2 | TDDConf.1.1 | | | |
| | Config 3 | TDDConf. 2.1 | | | |
| BW _{channel} | Config 1 | 10: N _{RB,c} = 52 | | | |
| | Config 2 | 10: N _{RB,c} = 52 | | | |
| | Config 3 | 40: N _{RB,c} = 106 | | | |
| BWP BW | Config 1 | 10: N _{RB,c} = 52 | | | |
| | Config 2 | 10: N _{RB,c} = 52 | | | |
| | Config 3 | 40: N _{RB,c} = 106 | | | |
| DRx Cycle | ms | Not Applicable | | | |
| PDSCH Reference measurement channel | Config 1 | SR.1.1 FDD | | | |
| | Config 2 | SR.1.1 TDD | | | |
| | Config 3 | SR2.1 TDD | | | |
| CORESET Reference Channel | Config 1 | CR.1.1 FDD | | | |
| | Config 2 | CR.1.1 TDD | | | |
| | Config 3 | CR2.1 TDD | | | |
| TRS configuration | Config 1 | TRS.1.1 FDD | | | |
| | Config 2 | TRS.1.1 TDD | | | |
| | Config 3 | TRS.1.2 TDD | | | |
| OCNG Patterns | | OP.1 | | | |
| SMTC Configuration | | SMTC.1 | | | |
| SSB Configuration | Config 1,2 | SSB.1 FR1 | | | |
| | Config 3 | SSB.2 FR1 | | | |
| PDSCH/PDCCH subcarrier spacing | Config 1,2 | 15 kHz | | | |
| | Config 3 | 30 kHz | | | |
| PUCCH/PUSCH subcarrier spacing | Config 1,2 | 15 kHz | | | |
| | Config 3 | 30 kHz | | | |

| PRACH configuration | | FR1 PRACH configuration 1 | | | | |
|--|------------------|---------------------------|--------|--------|-----------|--------|
| BWP configuration | Initial DL BWP | DLBWP.0.1 | | | | |
| | Dedicated DL BWP | DLBWP.1.1 | | | | |
| | Initial UL BWP | ULBWP.0.1 | | | | |
| | Dedicated UL BWP | ULBWP.1.1 | | | | |
| EPRE ratio of PSS to SSS | | dB | 0 | | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | |
| EPRE ratio of OCNM DMRS to SSS(Note 1) | | | | | | |
| EPRE ratio of OCNM to OCNM DMRS (Note 1) | | | | | | |
| N_{oc} ^{Note2} | | dBm/15kHz | -98 | | | |
| N_{oc} ^{Note2} | Config 1,2 | dBm/SCS | -98 | | | |
| | Config 3 | | -95 | | | |
| \hat{E}_s / I_{ot} | | dB | 8 | -0.64 | -Infinity | -0.64 |
| \hat{E}_s / N_{oc} | | dB | 8 | 8 | -Infinity | 8 |
| SSB_RP | Config 1,2 | dBm/SCS | -90 | -90 | -Infinity | -90 |
| | Config 3 | dBm/SCS | -87 | -87 | -Infinity | -87 |
| I_0 ^{Note3} | Config 1,2 | dBm/ 9.36MHz | -61.41 | -58.71 | -61.41 | -58.71 |
| | Config 3 | dBm/ 38.16MHz | -55.31 | -52.60 | -55.31 | -52.60 |
| Propagation condition | | - | AWGN | | AWGN | |
| Note 1: OCNM shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | |
| Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | | |
| Note 3: I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | | |

A.6.3.1.2.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 282 ms from the beginning of time period T2. The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 232 ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.2.2.

This gives a total of 282 ms.

A.6.3.1.3 Inter-frequency handover from FR1 to FR1; unknown target cell

A.6.3.1.3.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 inter frequency handover requirements specified in clause 6.1.1.2.

A.6.3.1.3.2 Test Parameters

Supported test configurations are shown in table A.6.3.1.3.2-1. Both handover delay and interruption length are tested by using the parameters in table A.6.3.1.3.2-2, and A.6.3.1.3.2-3.

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.6.3.1.3.2-1: Inter-frequency handover from FR1 to FR1 test configurations

| Config | Description |
|--|--|
| 1 | Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations | |

Table A.6.3.1.3.2-2: General test parameters Inter-frequency handover from FR1 to FR1

| Parameter | Unit | Value | Comment |
|----------------------------|-------------------|----------|--|
| Initial conditions | Active cell | Cell 1 | |
| | Neighbouring cell | Cell 2 | |
| Final condition | Active cell | Cell 2 | |
| Access Barring Information | - | Not Sent | No additional delays in random access procedure. |
| T1 | s | 5 | |
| T2 | s | ≤5 | |

Table A.6.3.1.3.2-3: Cell specific test parameters for NR FR1-FR1 Inter frequency handover test case

| Parameter | Unit | Cell 1 | | Cell 2 | |
|-------------------------------------|------------|-----------------------------|----|--------|----|
| | | T1 | T2 | T1 | T2 |
| NR RF Channel Number | | 1 | | 2 | |
| Duplex mode | Config 1 | FDD | | | |
| | Config 2,3 | TDD | | | |
| TDD configuration | Config 1 | Not Applicable | | | |
| | Config 2 | TDDConf.1.1 | | | |
| | Config 3 | TDDConf.2.1 | | | |
| BW _{channel} | Config 1 | 10: N _{RB,c} = 52 | | | |
| | Config 2 | 10: N _{RB,c} = 52 | | | |
| | Config 3 | 40: N _{RB,c} = 106 | | | |
| BWP BW | Config 1 | 10: N _{RB,c} = 52 | | | |
| | Config 2 | 10: N _{RB,c} = 52 | | | |
| | Config 3 | 40: N _{RB,c} = 106 | | | |
| TRS configuration | Config 1 | TRS.1.1 FDD | | | |
| | Config 2 | TRS.1.1 TDD | | | |
| | Config 3 | TRS.1.2 TDD | | | |
| DRx Cycle | ms | Not Applicable | | | |
| PDSCH Reference measurement channel | Config 1 | SR.1.1 FDD | | | |
| | Config 2 | SR.1.1 TDD | | | |
| | Config 3 | SR2.1 TDD | | | |
| | | CR.1.1 FDD | | | |

| | | | | | | |
|--|------------------|--------------|---------------------------|--------|-----------|--------|
| CORESET Reference Channel | Config 2 | | CR.1.1 TDD | | | |
| | Config 3 | | CR2.1 TDD | | | |
| OCNG Patterns | | | OP.1 | | | |
| SMTTC Configuration | | | SMTTC.1 | | | |
| SSB Configuration | Config 1,2 | | SSB.1 FR1 | | | |
| | Config 3 | | SSB.2 FR1 | | | |
| PDSCH/PDCCH subcarrier spacing | Config 1,2 | kHz | 15 kHz | | | |
| | Config 3 | | 30 kHz | | | |
| PUCCH/PUSCH subcarrier spacing | Config 1,2 | kHz | 15 kHz | | | |
| | Config 3 | | 30 kHz | | | |
| PRACH configuration | | | FR1 PRACH configuration 1 | | | |
| BWP | Initial DL BWP | | DLBWP.0.1 | | | |
| | Dedicated DL BWP | | DLBWP.1.1 | | | |
| | Initial UL BWP | | ULBWP.0.1 | | | |
| | Dedicated UL BWP | | ULBWP.1.1 | | | |
| EPRE ratio of PSS to SSS | | dB | 0 | | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | |
| N_{oc} | Note2 | dBm/15kHz | -98 | | -98 | |
| N_{oc} | Config 1,2 | dBm/SCS | -98 | | -98 | |
| | Config 3 | | -95 | | -95 | |
| \hat{E}_s / I_{ot} | | dB | 4 | 4 | -Infinity | 5 |
| \hat{E}_s / N_{oc} | | dB | 4 | 4 | -Infinity | 5 |
| SSB_RP | Config 1,2 | dBm/SCS | -94 | -94 | -Infinity | -93 |
| | Config 3 | dBm/SCS | -91 | -91 | -Infinity | -90 |
| I_o | Config 1,2 | dBm/9.36MHz | -64.59 | -64.59 | -70.05 | -63.85 |
| | Config 3 | dBm/38.16MHz | -58.49 | -58.49 | -63.94 | -57.75 |
| Propagation condition | | - | AWGN | | AWGN | |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | |
| Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | | |
| Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | | |

A.6.3.1.3.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 282 ms from the beginning of time period T2. The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 272 ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.2.2.

This gives a total of 282 ms.

A.6.3.1.4 SA NR - E-UTRAN handover

A.6.3.1.4.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1. This test shall verify the NR to E-UTRAN handover requirements as specified in clause 6.1.2.1.

The test comprises of one NR carrier and one E-UTRA carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 9.1.2-1 is configured before T2 begins to enable inter-RAT frequency monitoring.

A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.6.3.1.4-1. General test parameters are provided in Table A.6.3.1.4-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.6.3.1.4-3 and A.6.3.1.4-4 respectively.

Table A.6.3.1.4-1: Supported test configurations for SA inter-RAT E-UTRAN handover tests

| Configuration | Description |
|---------------|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD |
| 4 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD |
| 5 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD |
| 6 | NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.6.3.1.4-2: General test parameters for SA inter-RAT E-UTRAN handover

| Parameter | | Unit | Value | Comment |
|------------------------------|-------------------|------|-----------------------------------|--|
| NR RF Channel Number | | | 1 | 1 NR carrier frequency is used in the test |
| LTE RF Channel Number | | | 2 | 1 E-UTRAN carrier frequency is used in the test |
| Initial conditions | Active cell | | Cell 1 | NR cell |
| | Neighbouring cell | | Cell 2 | E-UTRAN cell |
| Final condition | Active cell | | Cell 2 | |
| NR measurement quantity | | | SS-RSRP | |
| E-UTRAN measurement quantity | | | RSRP | |
| b2-Threshold1 | | dBm | As specified in Table A.6.3.1.4-3 | Absolute NR SS-RSRP threshold for event B2 |
| b2-Threshold2EUTRAN | | dBm | -98 | Absolute E-UTRAN RSRP threshold for event B2 |
| Hysteresis | | dB | 0 | |
| TimeToTrigger | | s | 0 | |
| Filter coefficient | | | 0 | L3 filtering is not used |
| DRX | | | OFF | Non-DRX test |
| Access Barring Information | | - | Not sent | No additional delays in random access procedure |
| Time offset between cells | | | 3 ms | Asynchronous cells |
| Gap pattern configuration Id | | | 0 | As specified in Table 9.1.2-1 started before T2 starts |
| T1 | | s | 5 | |
| T2 | | s | ≤5 | |
| T3 | | s | 1 | |

Table A.6.3.1.4-3: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 1)

| Parameter | Unit | Configuration | Cell 1 | | |
|-------------------------------------|------------------|------------------|-----------------------------------|----|----|
| | | | T1 | T2 | T3 |
| RF channel number | | 1, 2, 3, 4, 5, 6 | 1 | | |
| Duplex mode | | 1, 4 | FDD | | |
| | | 2, 3, 5, 6 | TDD | | |
| TDD Configuration | | 2, 5 | TDDConf.1.1 | | |
| | | 3, 6 | TDDConf.1.2 | | |
| BW _{channel} | MHz | 1, 4 | 10: N _{RB,c} = 52 (FDD) | | |
| | | 2, 5 | 10: N _{RB,c} = 52 (TDD) | | |
| | | 3, 6 | 40: N _{RB,c} = 106 (TDD) | | |
| PDSCH reference measurement channel | | 1, 4 | SR.1.1 FDD | | |
| | | 2, 5 | SR.1.1 TDD | | |
| | | 3, 6 | SR.2.1 TDD | | |
| CORSET reference channel | | 1, 4 | CR.1.1 FDD | | |
| | | 2, 5 | CR.1.1 TDD | | |
| | | 3, 6 | CR.2.1 TDD | | |
| TRS configuration | | 1, 4 | TRS.1.1 FDD | | |
| | | 2, 5 | TRS.1.1 TDD | | |
| | | 3, 6 | TRS.1.2 TDD | | |
| OCNG pattern ^{Note1} | | 1, 2, 3, 4, 5, 6 | OP.1 | | |
| BWP | Initial DL BWP | 1, 2, 3, 4, 5, 6 | DLBWP.0.1 | | |
| | Dedicated DL BWP | | DLBWP.1.1 | | |
| | Initial UL BWP | | ULBWP.0.1 | | |
| | Dedicated UL BWP | | ULBWP.1.1 | | |
| SMTc configuration | | 1, 2, 3, 4, 5, 6 | SMTc.1 | | |

| | | | | | |
|---|---------------|------------------|-----------|--------|--------|
| SSB configuration | | 1, 2, 4, 5 | SSB.1 FR1 | | |
| | | 3, 6 | SSB.2 FR1 | | |
| b2-Threshold1 | dBm | 1, 2, 4, 5 | -96 | | |
| | | 3, 6 | -93 | | |
| EPRE ratio of PSS to SSS | dB | 1, 2, 3, 4, 5, 6 | 0 | | |
| EPRE ratio of PBCH_DMRS to SSS | | | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | | | | |
| N_{oc} ^{Note2} | | | | | |
| N_{oc} ^{Note2} | dBm/SCS | 1, 2, 4, 5 | -100 | | |
| | | 3, 6 | -97 | | |
| \hat{E}_s/N_{oc} | dB | 1, 2, 3, 4, 5, 6 | 012 | 0-4 | 0-4 |
| \hat{E}_s/I_{ot} ^{Note3} | dB | 1, 2, 3, 4, 5, 6 | 012 | 0-4 | 0-4 |
| SS-RSRP ^{Note3} | dBm/SCS | 1, 2, 4, 5 | -88 | -104 | -104 |
| | | 3, 6 | -85 | -101 | -101 |
| I_o ^{Note3} | dBm/9.36 MHz | 1, 2, 4, 5 | -59.78 | -70.59 | -70.59 |
| | dBm/38.16 MHz | 3, 6 | -53.68 | -64.49 | -64.49 |
| Propagation condition | | 1, 2, 3, 4, 5, 6 | AWGN | | |
| Antenna Configuration and Correlation Matrix | | 1, 2, 3, 4, 5, 6 | 1x2 Low | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: \hat{E}_s/I_{ot}, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | |

Table A.6.3.1.4-4: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 2)

| Parameter | Unit | Configuration | Cell 2 | | |
|---|------|------------------|---|----|----|
| | | | T1 | T2 | T3 |
| RF channel number | | 1, 2, 3, 4, 5, 6 | 2 | | |
| Duplex mode | | 1, 2, 3 | FDD | | |
| | | 4, 5, 6 | TDD | | |
| TDD special subframe configuration ^{Note1} | | 4, 5, 6 | 6 | | |
| TDD uplink-downlink configuration ^{Note1} | | 4, 5, 6 | 1 | | |
| BW _{channel} | MHz | 1, 2, 3, 4, 5, 6 | 5 MHz: $N_{RB,c} = 25$ 10 MHz: $N_{RB,c} = 50$ 20 MHz: $N_{RB,c} = 100$ | | |
| PRACH Configuration ^{Note2} | | 1, 2, 3 | 4 | | |
| | | 4, 5, 6 | 53 | | |
| PDSCH parameters: | | 1, 2, 3 | 5 MHz: R.7 FDD 10 MHz: R.3 FDD | | |

| | | | | | |
|--|-----------|------------------|--|-----------------------------------|-----------------------------------|
| DL Reference Measurement Channel ^{Note3} | | | 20 MHz: R.6 FDD | | |
| | | 4, 5, 6 | 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD | | |
| PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note3} | | 1, 2, 3 | 5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD | | |
| | | 4, 5, 6 | 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD | | |
| OCNG Patterns ^{Note3} | | 1, 2, 3 | 5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD | | |
| | | 4, 5, 6 | 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD | | |
| PBCH_RA | dB | 1, 2, 3, 4, 5, 6 | 0 | | |
| PBCH_RB | | | | | |
| PSS_RA | | | | | |
| SSS_RA | | | | | |
| PCFICH_RB | | | | | |
| PHICH_RA | | | | | |
| PHICH_RB | | | | | |
| PDCCH_RA | | | | | |
| PDCCH_RB | | | | | |
| PDSCH_RA | | | | | |
| PDSCH_RB | | | | | |
| OCNG_RA ^{Note4} | | | | | |
| OCNG_RB ^{Note4} | | | | | |
| N_{oc} ^{Note5} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -98 | | |
| \hat{E}_s/N_{oc} | dB | 1, 2, 3, 4, 5, 6 | -Infinity | 8 | 78 |
| \hat{E}_s/I_{ot} ^{Note6} | dB | 1, 2, 3, 4, 5, 6 | -Infinity | 78 | 78 |
| RSRP ^{Note6} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -Infinity | -90 | -90 |
| SCH_RP ^{Note6} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -Infinity | -90 | -90 |
| I_o ^{Note6} | dBm/9MHz | 1, 2, 3, 4, 5, 6 | -67.21 $+10\log(N_{RB,c}/100)$ | -58.57 $+10\log(N_{RB,c}/100)$ | -58.57 $+10\log(N_{RB,c}/100)$ |
| Propagation Condition | | 1, 2, 3, 4, 5, 6 | AWGN | | |
| Antenna Configuration and Correlation Matrix ^{Note7} | | 1, 2, 3, 4, 5, 6 | 1x2 Low | | |
| <p>Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].</p> <p>Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].</p> <p>Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.</p> <p>Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 6: \hat{E}_s/I_{ot}, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].</p> | | | | | |

A.6.3.1.4.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 85 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and is specified in clause 6.1.2.1.

$T_{\text{interrupt}} = 35$ ms in the test; $T_{\text{interrupt}}$ is defined in clause 6.1.2.1.

This gives a total of 85 ms.

A.6.3.1.5 SA NR - E-UTRAN handover with unknown target cell

A.6.3.1.5.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1. This test shall verify the NR to E-UTRAN handover requirements for the case when the target E-UTRAN cell is unknown as specified in clause 6.1.2.1.

The test comprises of one NR carrier and one E-UTRA carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable. No Gap pattern shall be configured.

A RRC message implying handover shall be sent to the UE during period T1. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.6.3.1.5-1. General test parameters are provided in Table A.6.3.1.5-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.6.3.1.5-3 and A.6.3.1.5-4 respectively.

Table A.6.3.1.5-1: Supported test configurations for SA inter-RAT E-UTRAN handover tests

| Configuration | Description |
|---------------|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD |
| 4 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD |
| 5 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD |
| 6 | NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.6.3.1.5-2: General test parameters for SA inter-RAT E-UTRAN handover

| Parameter | Unit | Value | Comment |
|----------------------------|-------------------|----------|---|
| NR RF Channel Number | | 1 | 1 NR carrier frequency is used in the test |
| LTE RF Channel Number | | 2 | 1 E-UTRAN carrier frequency is used in the test |
| Initial conditions | Active cell | Cell 1 | NR cell |
| | Neighbouring cell | Cell 2 | E-UTRAN cell |
| Final condition | Active cell | Cell 2 | |
| NR measurement quantity | | SS-RSRP | |
| DRX | | OFF | Non-DRX test |
| Access Barring Information | - | Not sent | No additional delays in random access procedure |
| Time offset between cells | | 3 ms | Asynchronous cells |
| T1 | s | ≤5 | |
| T2 | s | 1 | |

Table A.6.3.1.5-3: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 1)

| Parameter | | Unit | Configuration | Cell 1 | |
|--|------------------|--------------|------------------|-----------------------------------|--------|
| | | | | T1 | T2 |
| RF channel number | | | 1, 2, 3, 4, 5, 6 | 1 | |
| Duplex mode | | | 1, 4 | FDD | |
| | | | 2, 3, 5, 6 | TDD | |
| TDD Configuration | | | 2, 5 | TDDConf.1.1 | |
| | | | 3, 6 | TDDConf.1.2 | |
| BW _{channel} | | MHz | 1, 4 | 10: N _{RB,c} = 52 (FDD) | |
| | | | 2, 5 | 10: N _{RB,c} = 52 (TDD) | |
| | | | 3, 6 | 40: N _{RB,c} = 106 (TDD) | |
| PDSCH reference measurement channel | | | 1, 4 | SR.1.1 FDD | |
| | | | 2, 5 | SR.1.1 TDD | |
| | | | 3, 6 | SR.2.1 TDD | |
| CORSET reference channel | | | 1, 4 | CR.1.1 FDD | |
| | | | 2, 5 | CR.1.1 TDD | |
| | | | 3, 6 | CR.2.1 TDD | |
| TRS configuration | | | 1, 4 | TRS.1.1 FDD | |
| | | | 2, 5 | TRS.1.1 TDD | |
| | | | 3, 6 | TRS.1.2 TDD | |
| OCNG pattern ^{Note1} | | | 1, 2, 3, 4, 5, 6 | OP.1 | |
| BWP | Initial DL BWP | | 1, 2, 3, 4, 5, 6 | DLBWP.0.1 | |
| | Dedicated DL BWP | | | DLBWP.1.1 | |
| | Initial UL BWP | | | ULBWP.0.1 | |
| | Dedicated UL BWP | | | ULBWP.1.1 | |
| SMTC configuration | | | 1, 2, 3, 4, 5, 6 | SMTC.1 | |
| SSB configuration | | | 1, 2, 4, 5 | SSB.1 FR1 | |
| | | | 3, 6 | SSB.2 FR1 | |
| EPRE ratio of PSS to SSS | | dB | 1, 2, 3, 4, 5, 6 | 0 | |
| EPRE ratio of PBCH_DMRS to SSS | | | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | | | | |
| N _{oc} ^{Note2} | | dBm/15 KHz | 1, 2, 3, 4, 5, 6 | -98 | |
| N _{oc} ^{Note2} | | dBm/SCS | 1, 2, 4, 5 | -98 | |
| | | | 3, 6 | -95 | |
| Ē _s /N _{oc} | | dB | 1, 2, 3, 4, 5, 6 | 0 | 0 |
| Ē _s /I _{ot} ^{Note3} | | dB | 1, 2, 3, 4, 5, 6 | 0 | 0 |
| SS-RSRP ^{Note3} | | dBm/SCS | 1, 2, 4, 5 | -98 | -98 |
| | | | 3, 6 | -95 | -95 |
| I _o ^{Note3} | | dBm/9.36 MHz | 1, 2, 4, 5 | -67.04 | -67.04 |
| | | | dBm/38.16 MHz | 3, 6 | -60.94 |

| | | | |
|--|--|------------------|---------|
| Propagation condition | | 1, 2, 3, 4, 5, 6 | AWGN |
| Antenna Configuration and Correlation Matrix | | 1, 2, 3, 4, 5, 6 | 1x2 Low |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | |
| Note 3: | \hat{E}_s/I_{ot} , SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | |

Table A.6.3.1.5-4: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 2)

| Parameter | Unit | Configuration | Cell 2 | |
|--|------|------------------|---|----|
| | | | T1 | T2 |
| RF channel number | | 1, 2, 3, 4, 5, 6 | 2 | |
| Duplex mode | | 1, 2, 3 | FDD | |
| | | 4, 5, 6 | TDD | |
| TDD special subframe configuration ^{Note1} | | 4, 5, 6 | 6 | |
| TDD uplink-downlink configuration ^{Note1} | | 4, 5, 6 | 1 | |
| BW _{channel} | MHz | 1, 2, 3, 4, 5, 6 | 5 MHz: $N_{RB,c} = 25$ 10 MHz: $N_{RB,c} = 50$ 20 MHz: $N_{RB,c} = 100$ | |
| PRACH Configuration ^{Note2} | | 1, 2, 3 | 4 | |
| | | 4, 5, 6 | 53 | |
| PDSCH parameters: DL Reference Measurement Channel ^{Note3} | | 1, 2, 3 | 5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD | |
| | | 4, 5, 6 | 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD | |
| PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note3} | | 1, 2, 3 | 5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD | |
| | | 4, 5, 6 | 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD | |
| OCNG Patterns ^{Note3} | | 1, 2, 3 | 5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD | |
| | | 4, 5, 6 | 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD | |
| PBCH_RA | dB | 1, 2, 3, 4, 5, 6 | 0 | |
| PBCH_RB | | | | |
| PSS_RA | | | | |
| SSS_RA | | | | |
| PCFICH_RB | | | | |
| PHICH_RA | | | | |
| PHICH_RB | | | | |
| PDCCH_RA | | | | |
| PDCCH_RB | | | | |
| PDSCH_RA | | | | |
| PDSCH_RB | | | | |
| OCNG_RA ^{Note4} | | | | |
| OCNG_RB ^{Note4} | | | | |

| | | | | |
|--|-----------|------------------|-----------|--------|
| N_{oc} ^{Note5} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -98 | |
| \hat{E}_s/N_{oc} | dB | 1, 2, 3, 4, 5, 6 | -Infinity | 7 |
| \hat{E}_s/I_{ot} ^{Note6} | dB | 1, 2, 3, 4, 5, 6 | -Infinity | 7 |
| RSRP ^{Note6} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -Infinity | -91 |
| SCH_RP ^{Note6} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -Infinity | -91 |
| I_o ^{Note6} | dBm/9MHz | 1, 2, 3, 4, 5, 6 | -70.22 | -62.43 |
| Propagation Condition | | 1, 2, 3, 4, 5, 6 | AWGN | |
| Antenna Configuration and Correlation Matrix ^{Note7} | | 1, 2, 3, 4, 5, 6 | 1x2 Low | |
| <p>Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].</p> <p>Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].</p> <p>Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.</p> <p>Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 6: \hat{E}_s/I_{ot}, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].</p> | | | | |

A.6.3.1.5.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 165 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and is specified in clause 6.1.2.1.

$T_{interrupt}$ = 115 ms in the test; $T_{interrupt}$ is defined in clause 6.1.2.1.

This gives a total of 165 ms.

A.6.3.2 RRC Connection Mobility Control

A.6.3.2.1 SA: RRC Re-establishment

A.6.3.2.1.1 Intra-frequency RRC Re-establishment in FR1

A.6.3.2.1.1.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR1 with known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1.

The test parameters are given in table A.6.3.2.1.1.1-1, table A.6.3.2.1.1.1-2 and table A.6.3.2.1.1.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.6.3.2.1.1.1-1: Supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations. |

Table A.6.3.2.1.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1

| Parameter | | Unit | Test configuration | Value | Comment |
|----------------------------|-----------------|------|--------------------|---------------------------|---|
| Initial condition | Active cell | | 1, 2, 3 | Cell1 | |
| | Neighbour cells | | 1, 2, 3 | Cell2 | |
| Final condition | Active cell | | 1, 2, 3 | Cell2 | |
| RF Channel Number | | | 1, 2, 3 | 1 | |
| Time offset between cells | | | 1 | 3 ms | Asynchronous cells |
| | | | 2 | 3 μ s | Synchronous cells |
| | | | 3 | 3 μ s | Synchronous cells |
| N310 | | - | 1, 2, 3 | 1 | Maximum consecutive out-of-sync indications from lower layers |
| N311 | | - | 1, 2, 3 | 1 | Minimum consecutive in-sync indications from lower layers |
| T310 | | ms | 1, 2, 3 | 0 | Radio link failure timer; T310 is disabled |
| T311 | | ms | 1, 2, 3 | 3000 | RRC re-establishment timer |
| Access Barring Information | | - | 1, 2, 3 | Not Sent | No additional delays in random access procedure. |
| SSB configuration | | | 1 | SSB.1 FR1 | |
| | | | 2 | SSB.1 FR1 | |
| | | | 3 | SSB.2 FR1 | |
| SMTC configuration | | | 1 | SMTC pattern 2 | |
| | | | 2 | SMTC pattern 1 | |
| | | | 3 | SMTC pattern 1 | |
| DRX cycle length | | s | 1, 2, 3 | OFF | |
| PRACH configuration | | | 1, 2, 3 | FR1 PRACH configuration 1 | Table A.3.8.2.1-1 |
| T1 | | s | 1, 2, 3 | 5 | |
| T2 | | ms | 1, 2, 3 | 200 | Time for the UE to detect RLF |
| T3 | | s | 1, 2, 3 | 2 | |

Table A.6.3.2.1.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR1

| Parameter | Unit | Test configuration | Cell 1 | | | Cell 2 | | |
|--|---------------|--------------------|-------------------------|-----------|-----------|-------------------------|--------|------------|
| | | | T1 | T2 | T3 | T1 | T2 | T3 |
| TDD configuration | | 1 | N/A | | | N/A | | |
| | | 2 | TDDConf.1.1 | | | TDDConf.1.1 | | |
| | | 3 | TDDConf.2.1 | | | TDDConf.2.1 | | |
| PDSCH RMC configuration | | 1 | SR.1.1 FDD | | | N/A | | |
| | | 2 | SR.1.1 TDD | | | | | |
| | | 3 | SR.2.1 TDD | | | | | |
| RMSI CORESET RMC configuration | | 1 | CR.1.1 FDD | | | CR.1.1 FDD | | |
| | | 2 | CR.1.1 TDD | | | CR.1.1 TDD | | |
| | | 3 | CR.2.1 TDD | | | CR.2.1 TDD | | |
| Dedicated CORESET RMC configuration | | 1 | CCR.1.1 FDD | | | CCR.1.1 FDD | | |
| | | 2 | CCR.1.1 TDD | | | CCR.1.1 TDD | | |
| | | 3 | CCR.2.1 TDD | | | CCR.2.1 TDD | | |
| OCNG Pattern | | 1, 2, 3 | OP.1 defined in A.3.2.1 | | | OP.1 defined in A.3.2.1 | | |
| TRS configuration | | 1 | TRS.1.1 FDD | | | N/A | | |
| | | 2 | TRS.1.1 TDD | | | | | |
| | | 3 | TRS.1.2 TDD | | | | | |
| Initial DL BWP configuration | | 1, 2, 3 | DLBWP.0.1 | | | DLBWP.0.1 | | |
| Initial UL BWP configuration | | 1, 2, 3 | ULBWP.0.1 | | | ULBWP.0.1 | | |
| Active DL BWP configuration | | 1, 2, 3 | DLBWP.1.1 | N/A | N/A | N/A | N/A | DLBW P.1.1 |
| Active UL BWP configuration | | 1, 2, 3 | ULBWP.1.1 | N/A | N/A | N/A | N/A | ULBW P.1.1 |
| RLM-RS | | 1, 2, 3 | SSB | | | SSB | | |
| \hat{E}_s / I_{ot} | dB | 1 | 1.54 | -infinity | -infinity | -3.79 | 4 | 4 |
| | | 2 | | | | | | |
| | | 3 | | | | | | |
| N_{oc} ^{Note2} | dBm/SCS | 1 | -98 | | | | | |
| | | 2 | -98 | | | | | |
| | | 3 | -95 | | | | | |
| N_{oc} ^{Note2} | dBm/15 kHz | 1 | -98 | | | | | |
| | | 2 | | | | | | |
| | | 3 | | | | | | |
| \hat{E}_s / N_{oc} | dB | 1 | 7 | -infinity | -infinity | 4 | 4 | 4 |
| | | 2 | | | | | | |
| | | 3 | | | | | | |
| SS-RSRP ^{Note3} | dBm/SCS | 1 | -91 | -infinity | -infinity | -94 | -94 | -94 |
| | | 2 | -91 | -infinity | -infinity | -94 | -94 | -94 |
| | | 3 | -88 | -infinity | -infinity | -91 | -91 | -91 |
| I _o | dBm/9.36 MHz | 1 | -60.74 | -64.59 | -64.59 | -60.74 | -64.59 | -64.59 |
| | dBm/9.36 MHz | 2 | -60.74 | -64.59 | -64.59 | -60.74 | -64.59 | -64.59 |
| | dBm/38.16 MHz | 3 | -54.65 | -58.50 | -58.50 | -54.65 | -58.50 | -58.50 |
| Propagation Condition | | 1, 2, 3 | AWGN | | | | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | | | |

A.6.3.2.1.1.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to a known NR intra frequency cell shall be less than 1.6 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

$T_{\text{UL_grant}}$ = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence $T_{\text{UL_grant}}$ is not used.

$$T_{\text{UE_re-establish_delay}} = 50 \text{ ms} + T_{\text{identify_intra_NR}} + \sum_{i=1}^{N_{\text{freq}}-1} T_{\text{identify_inter_NR},i} + T_{\text{SI-NR}} + T_{\text{PRACH}}$$

$$N_{\text{freq}} = 1$$

$$T_{\text{identify_intra_NR}} = 200 \text{ ms}$$

$T_{\text{SI}} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target intra-frequency NR cell.

$T_{\text{PRACH}} = 15 \text{ ms}$; it is the additional delay caused by the random access procedure.

This gives a total of 1545 ms, allow 1.6 s in the test case.

A.6.3.2.1.2 Inter-frequency RRC Re-establishment in FR1

A.6.3.2.1.2.1 Test Purpose and Environment

The purpose is to verify that the NR inter-frequency RRC re-establishment delay in FR1 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1.

The test parameters are given in table A.6.3.2.1.2.1-1, table A.6.3.2.1.2.1-2 and table A.6.3.2.1.2.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1.

Table A.6.3.2.1.2.1-1: Supported test configurations

| Configuration | Description of serving cell | Description of target cell |
|---------------|---|---|
| 1 | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations. | |

Table A.6.3.2.1.2.1-2: General test parameters for NR inter-frequency RRC Re-establishment test case in FR1

| Parameter | | Unit | Test configuration | Value | Comment |
|----------------------------|-----------------|------|--------------------|---------------------------|---|
| Initial condition | Active cell | | 1, 2, 3 | Cell1 | |
| | Neighbour cells | | 1, 2, 3 | Cell2 | |
| Final condition | Active cell | | 1, 2, 3 | Cell2 | |
| RF Channel Number | | | 1, 2, 3 | 1, 2 | |
| Time offset between cells | | | 1 | 3 ms | Asynchronous cells |
| | | | 2 | 3 μ s | Synchronous cells |
| | | | 3 | 3 μ s | Synchronous cells |
| N310 | | - | 1, 2, 3 | 1 | Maximum consecutive out-of-sync indications from lower layers |
| N311 | | - | 1, 2, 3 | 1 | Minimum consecutive in-sync indications from lower layers |
| T310 | | ms | 1, 2, 3 | 0 | Radio link failure timer; T310 is disabled |
| T311 | | ms | 1, 2, 3 | 5000 | RRC re-establishment timer |
| Access Barring Information | | - | 1, 2, 3 | Not Sent | No additional delays in random access procedure. |
| SSB configuration | | | 1 | SSB.1 FR1 | |
| | | | 2 | SSB.1 FR1 | |
| | | | 3 | SSB.2 FR1 | |
| SMTC configuration | | | 1 | SMTC pattern 2 | |
| | | | 2 | SMTC pattern 1 | |
| | | | 3 | SMTC pattern 1 | |
| DRX cycle length | | s | 1, 2, 3 | OFF | |
| PRACH configuration | | | 1, 2, 3 | FR1 PRACH configuration 1 | Table A.3.8.2.1-1 |
| T1 | | s | 1, 2, 3 | 5 | |
| T2 | | ms | 1, 2, 3 | 200 | Time for the UE to detect RLF |
| T3 | | s | 1, 2, 3 | 5 | |

Table A.6.3.2.1.2.1-3: Cell specific test parameters for NR inter-frequency RRC Re-establishment test case in FR1

| Parameter | Unit | Test configuration | Cell 1 | | | Cell 2 | | |
|-------------------------------------|------|--------------------|-------------------------|----|----|-------------------------|----|----|
| | | | T1 | T2 | T3 | T1 | T2 | T3 |
| RF Channel Number | | 1, 2, 3 | 1 | | | 2 | | |
| TDD configuration | | 1 | N/A | | | N/A | | |
| | | 2 | TDDConf.1.1 | | | TDDConf.1.1 | | |
| | | 3 | TDDConf.2.1 | | | TDDConf.2.1 | | |
| PDSCH RMC configuration | | 1 | SR.1.1 FDD | | | N/A | | |
| | | 2 | SR.1.1 TDD | | | | | |
| | | 3 | SR.2.1 TDD | | | | | |
| RMSI CORESET RMC configuration | | 1 | CR.1.1 FDD | | | CR.1.1 FDD | | |
| | | 2 | CR.1.1 TDD | | | CR.1.1 TDD | | |
| | | 3 | CR.2.1 TDD | | | CR.2.1 TDD | | |
| Dedicated CORESET RMC configuration | | 1 | CCR.1.1 FDD | | | CCR.1.1 FDD | | |
| | | 2 | CCR.1.1 TDD | | | CCR.1.1 TDD | | |
| | | 3 | CCR.2.1 TDD | | | CCR.2.1 TDD | | |
| OCNG Pattern | | 1, 2, 3 | OP.1 defined in A.3.2.1 | | | OP.1 defined in A.3.2.1 | | |

| | | | | | | | | |
|--|---------------|---------|-------------|-----------|-----------|-----------|-----------|-----------|
| TRS configuration | | 1 | TRS.1.1 FDD | | | N/A | | |
| | | 2 | TRS.1.1 TDD | | | | | |
| | | 3 | TRS.1.2 TDD | | | | | |
| Initial DL BWP configuration | | 1, 2, 3 | DLBWP.0 | | | DLBWP.0 | | |
| Initial UL BWP configuration | | 1, 2, 3 | ULBWP.0 | | | ULBWP.0 | | |
| Active DL BWP configuration | | 1, 2, 3 | DLBWP.1.1 | N/A | N/A | N/A | N/A | DLBWP.1.1 |
| Active UL BWP configuration | | 1, 2, 3 | ULBWP.1.1 | N/A | N/A | N/A | N/A | ULBWP.1.1 |
| RLM-RS | | 1, 2, 3 | SSB | | | SSB | | |
| \hat{E}_s / I_{ot} | dB | 1 | 4 | -infinity | -infinity | -infinity | -infinity | 7 |
| | | 2 | | | | | | |
| | | 3 | | | | | | |
| N_{oc} Note2 | dBm/SCS | 1 | -98 | | | | | |
| | | 2 | -98 | | | | | |
| | | 3 | -95 | | | | | |
| N_{oc} Note2 | dBm/15 kHz | 1 | -98 | | | | | |
| | | 2 | | | | | | |
| | | 3 | | | | | | |
| \hat{E}_s / N_{oc} | dB | 1 | 4 | -infinity | -infinity | -infinity | -infinity | 7 |
| | | 2 | | | | | | |
| | | 3 | | | | | | |
| SS-RSRP Note3 | dBm/SCS | 1 | -94 | -infinity | -infinity | -infinity | -infinity | -91 |
| | | 2 | -94 | -infinity | -infinity | -infinity | -infinity | -91 |
| | | 3 | -91 | -infinity | -infinity | -infinity | -infinity | -88 |
| I _o | dBm/9.36 MHz | 1 | -64.59 | -70.05 | -70.05 | -70.05 | -70.05 | -62.26 |
| | dBm/9.36 MHz | 2 | -64.59 | -70.05 | -70.05 | -70.05 | -70.05 | -62.26 |
| | dBm/38.16 MHz | 3 | -58.50 | -63.94 | -63.94 | -63.94 | -63.94 | -56.15 |
| Propagation Condition | | 1, 2, 3 | AWGN | | | | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | | | |

A.6.3.2.1.2.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less than 3 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

$T_{\text{UL_grant}}$ = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence $T_{\text{UL_grant}}$ is not used.

$$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

$$N_{freq} = 2$$

$$T_{identify_intra_NR} = 800 \text{ ms}$$

$$T_{identify_inter_NR} = 800 \text{ ms}$$

$T_{SI} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target inter-frequency NR cell.

$T_{PRACH} = 15 \text{ ms}$; it is the additional delay caused by the random access procedure.

This gives a total of 2945 ms, allow 3 s in the test case.

A.6.3.2.1.3 Intra-frequency RRC Re-establishment in FR1 without serving cell timing

A.6.3.2.1.3.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR1 without serving cell timing is within the specified limits. These tests will verify the requirements in clause 6.2.1.

The test parameters are given in table A.6.3.2.1.3.1-1, table A.6.3.2.1.3.1-2 and table A.6.3.2.1.3.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.6.3.2.1.3.1-1: Supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations. |

Table A.6.3.2.1.3.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1

| Parameter | | Unit | Test configuration | Value | Comment |
|----------------------------|-----------------|------|--------------------|---------------------------|--|
| Initial condition | Active cell | | 1, 2, 3 | Cell1 | |
| | Neighbour cells | | 1, 2, 3 | Cell2 | |
| Final condition | Active cell | | 1, 2, 3 | Cell2 | |
| RF Channel Number | | | 1, 2, 3 | 1 | |
| Time offset between cells | | | 1 | 3 ms | Asynchronous cells |
| | | | 2 | 3 μ s | Synchronous cells |
| | | | 3 | 3 μ s | Synchronous cells |
| N310 | | - | 1, 2, 3 | 1 | Maximum consecutive out-of-sync indications from lower layers |
| N311 | | - | 1, 2, 3 | 1 | Minimum consecutive in-sync indications from lower layers |
| T310 | | ms | 1, 2, 3 | 6000 | Radio link failure timer configured by <i>RLF-TimersAndConstants</i> |
| T311 | | ms | 1, 2, 3 | 3000 | RRC re-establishment timer |
| Access Barring Information | | - | 1, 2, 3 | Not Sent | No additional delays in random access procedure. |
| SSB configuration | | | 1 | SSB.1 FR1 | |
| | | | 2 | SSB.1 FR1 | |
| | | | 3 | SSB.2 FR1 | |
| SMTC configuration | | | 1 | SMTC pattern 2 | |
| | | | 2 | SMTC pattern 1 | |
| | | | 3 | SMTC pattern 1 | |
| DRX cycle length | | s | 1, 2, 3 | OFF | |
| PRACH configuration | | | 1, 2, 3 | FR1 PRACH configuration 1 | Table A.3.8.2.1-1 |
| T1 | | s | 1, 2, 3 | 5 | |
| T2 | | s | 1, 2, 3 | 6 | Time for the UE to detect RLF |
| T3 | | s | 1, 2, 3 | 3 | |

Table A.6.3.2.1.3.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR1

| Parameter | Unit | Test configuration | Cell 1 | | | Cell 2 | | |
|--|---------------|--------------------|-------------------------|-----------|-----------|-------------------------|-----------|--------|
| | | | T1 | T2 | T3 | T1 | T2 | T3 |
| TDD configuration | | 1 | N/A | | | N/A | | |
| | | 2 | TDDConf.1.1 | | | TDDConf.1.1 | | |
| | | 3 | TDDConf.2.1 | | | TDDConf.2.1 | | |
| PDSCH RMC configuration | | 1 | SR.1.1 FDD | | | N/A | | |
| | | 2 | SR.1.1 TDD | | | | | |
| | | 3 | SR.2.1 TDD | | | | | |
| RMSI CORESET RMC configuration | | 1 | CR.1.1 FDD | | | CR.1.1 FDD | | |
| | | 2 | CR.1.1 TDD | | | CR.1.1 TDD | | |
| | | 3 | CR.2.1 TDD | | | CR.2.1 TDD | | |
| Dedicated CORESET RMC configuration | | 1 | CCR.1.1 FDD | | | CCR.1.1 FDD | | |
| | | 2 | CCR.1.1 TDD | | | CCR.1.1 TDD | | |
| | | 3 | CCR.2.1 TDD | | | CCR.2.1 TDD | | |
| OCNG Pattern | | 1, 2, 3 | OP.1 defined in A.3.2.1 | | | OP.1 defined in A.3.2.1 | | |
| Initial DL BWP configuration | | 1, 2, 3 | DLBWP.0.1 | | | DLBWP.0.1 | | |
| Initial UL BWP configuration | | 1, 2, 3 | ULBWP.0.1 | | | ULBWP.0.1 | | |
| RLM-RS | | 1, 2, 3 | SSB | | | SSB | | |
| \hat{E}_s / I_{ot} | dB | 1 | 4 | -infinity | -infinity | -infinity | -infinity | 4 |
| | | 2 | | | | | | |
| | | 3 | | | | | | |
| N_{oc} <small>Note2</small> | dBm/SCS | 1 | -98 | | | | | |
| | | 2 | -98 | | | | | |
| | | 3 | -95 | | | | | |
| N_{oc} <small>Note2</small> | dBm/15 kHz | 1 | -98 | | | | | |
| | | 2 | | | | | | |
| | | 3 | | | | | | |
| \hat{E}_s / N_{oc} | dB | 1 | 4 | -infinity | -infinity | -infinity | -infinity | 4 |
| | | 2 | | | | | | |
| | | 3 | | | | | | |
| SS-RSRP <small>Note3</small> | dBm/SCS | 1 | -94 | -infinity | -infinity | -infinity | -infinity | -94 |
| | | 2 | -94 | -infinity | -infinity | -infinity | -infinity | -94 |
| | | 3 | -91 | -infinity | -infinity | -infinity | -infinity | -91 |
| I _o | dBm/9.36 MHz | 1 | -64.59 | -infinity | -infinity | -infinity | -infinity | -64.59 |
| | dBm/9.36 MHz | 2 | -64.59 | -infinity | -infinity | -infinity | -infinity | -64.59 |
| | dBm/38.16 MHz | 3 | -58.50 | -infinity | -infinity | -infinity | -infinity | -58.50 |
| Propagation Condition | | 1, 2, 3 | AWGN | | | | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | | | |

A.6.3.2.1.3.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell without serving cell timing shall be less than 2.2 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

$T_{\text{UL_grant}}$ = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence $T_{\text{UL_grant}}$ is not used.

$$T_{\text{UE_re-establish_delay}} = 50 \text{ ms} + T_{\text{identify_intra_NR}} + \sum_{i=1}^{N_{\text{freq}}-1} T_{\text{identify_inter_NR},i} + T_{\text{SI-NR}} + T_{\text{PRACH}}$$

$$N_{\text{freq}} = 1$$

$$T_{\text{identify_intra_NR}} = 800 \text{ ms}$$

$T_{\text{SI}} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 [2] for the target intra-frequency NR cell.

$T_{\text{PRACH}} = 15 \text{ ms}$; it is the additional delay caused by the random access procedure.

This gives a total of 2145 ms, allow 2.2 s in the test case.

A.6.3.2.2 Random Access

A.6.3.2.2.1 Contention based random access test in FR1 for NR standalone

A.6.3.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.2 and Clause 7.1.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.6.3.2.2.1.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.6.3.2.2.1.1-2.

Table A.6.3.2.2.1.1-1: Supported test configurations for contention based random access test in FR1 for NR standalone

| Config | Description |
|--------|---|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations depending on UE capability |

Table A.6.3.2.2.1-2: General test parameters for contention based random access test in FR1 for NR Standalone

| Parameter | | Unit | Test-1 | Comments | | |
|--|---------------------------|----------|----------------------|---|--|------|
| SSB Configuration | Config 1 | | SSB pattern 1 in FR1 | As defined in A.3.10, except for number of SSBs per SS-burst and SS/PBCH block index as below | | |
| | Config 2 | | SSB pattern 2 in FR1 | | | |
| Number of SSBs per SS-burst | | | 2 | Different from the definition in A.3.10 | | |
| SS/PBCH block index | | | 0,1 | Different from the definition in A.3.10 | | |
| Duplex Mode for Cell 2 | Config 1 | | FDD | | | |
| | Config 2 | | TDD | | | |
| TDD Configuration | Config 2 | | TDDConf.1.2 | | | |
| OCNG Pattern ^{Note 1} | | | OCNG pattern 1 | As defined in A.3.2.1. | | |
| PDSCH parameters ^{Note 4} | Config 1 | | SR.1.1 FDD | As defined in A.3.1.1. | | |
| | Config 2 | | SR.2.1 TDD | | | |
| NR RF Channel Number | | | 1 | | | |
| EPRE ratio of PSS to SSS | | dB | 0 | | | |
| EPRE ratio of PBCH_DMRS to SSS | | dB | | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | dB | | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | dB | | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | dB | | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | dB | | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | dB | | | | |
| SSB with index 0 | \hat{E}_s / I_{ot} | | dB | 3 | Power of SSB with index 0 is set to be above configured <i>rsrp-ThresholdSSB</i> | |
| | N_{oc} | Config 1 | dBm/15kHz | -98 | | |
| | | Config 2 | | -101 | | |
| | \hat{E}_s / N_{oc} | | dB | | | 3 |
| SS-RSRP ^{Note 3} | | dBm/ SCS | | -95 | | |
| SSB with index 1 | \hat{E}_s / I_{ot} | | dB | -17 | Power of SSB with index 1 is set to be below configured <i>rsrp-ThresholdSSB</i> | |
| | N_{oc} | Config 1 | dBm/15kHz | -98 | | |
| | | Config 2 | | -101 | | |
| | \hat{E}_s / N_{oc} | | dB | | | -17 |
| | SS-RSRP ^{Note 3} | | dBm/ SCS | | | -115 |
| I_o ^{Note 2} | Config 1 | dBm | | -65.3/9.36MHz | For symbols without SSB index 1 | |
| | Config 2 | | | -62.2/38.16MHz | | |
| ss-PBCH-BlockPower | | dBm/ SCS | | -5 | As defined in clause 6.3.2 in TS 38.331 [2]. | |
| Configured UE transmitted power ($P_{CMAX, f, c}$) | | dBm | | 23 | As defined in clause 6.2.4 in TS 38.101-1. | |
| PRACH Configuration | | | | FR1 PRACH configuration 1 | As defined in A.3.x. | |
| Propagation Condition | | - | | AWGN | | |
| <p>Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.</p> <p>Note 2: SS-RSRP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purpose. They are not settable parameters.</p> <p>Note 3: Void</p> <p>Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.</p> | | | | | | |

A.6.3.2.2.1.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.6.3.2.2.1.2.1 Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2.2.2.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *rsrp-ThresholdSSB*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.1.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.1.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.1.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.1.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.1.2.4 Receiving an UL grant for msg3 retransmission

To test the UE behavior specified in clause 6.2.2.2.1.4 the System Simulator shall provide an UL grant for msg3 retransmission following a successful Random Access Response.

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

A.6.3.2.2.1.2.5 Reception of an Incorrect Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element *not* matching the CCCH SDU transmitted in msg3 uplink message.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

A.4.3.2.2.1.2.6 Reception of a Correct Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element matching the CCCH SDU transmitted in the msg3 uplink message.

The UE shall send ACK if the Contention Resolution is successful.

A.6.3.2.2.1.2.7 Contention Resolution Timer expiry

To test the UE behavior specified in Clause 6.2.2.2.1.6 the System Simulator shall *not* send a response to a msg3.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

A.6.3.2.2.2 Non-Contention based random access test in FR1 for NR standalone

A.6.3.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.2 and Clause 7.1.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.6.3.2.2.2.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.6.3.2.2.2.1-2 for SSB-based non-contention based random access test (Test 1) and CSI-RS-based non-contention based random access test (Test 2). Test 2 is only applicable to UE which supports csi-RSRP-AndRSRQ-MeasWithSSB or csi-RSRP-AndRSRQ-MeasWithoutSSB.

Table A.6.3.2.2.2.1-1: Supported test configurations for non-contention based random access test in FR1 for NR standalone

| Config | Description |
|--------|---|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations depending on UE capability |

Table A.6.3.2.2.1-2: General test parameters for non-contention based random access test in FR1 for NR Standalone

| Parameter | | Unit | Test-1 | Test-2 | Comments |
|---|----------------------|----------|---------------------------|---------------------------|---|
| SSB Configuration | Config 1 | | SSB pattern 1 in FR1 | SSB pattern 1 in FR1 | As defined in A.3.10, except for number of SSBs per SS-burst and SS/PBCH block index as below |
| | Config 2 | | SSB pattern 2 in FR1 | SSB pattern 2 in FR1 | |
| Number of SSBs per SS-burst | | | 2 | 2 | Different from the definition in A.3.10 |
| SS/PBCH block index | | | 0,1 | 0,1 | Different from the definition in A.3.10 |
| CSI-RS Configuration | Config 1 | | N/A | CSI-RS.1.1 FDD | As defined in A.3.1.4 |
| | Config 2 | | | CSI-RS.2.1 TDD | |
| Duplex Mode for Cell 2 | Config 1 | | FDD | FDD | |
| | Config 2 | | TDD | TDD | |
| TDD Configuration | Config 2 | | TDDConf.1.2 | TDDConf.1.2 | |
| OCNG Pattern ^{Note 1} | | | OCNG pattern 1 | OCNG pattern 1 | As defined in A.3.2.1. |
| PDSCH parameters ^{Note 4} | Config 1 | | SR.1.1 FDD | SR.1.1 FDD | As defined in A.3.1.1. |
| | Config 2 | | SR.2.1 TDD | SR.2.1 TDD | |
| NR RF Channel Number | | | 1 | 1 | |
| EPRE ratio of PSS to SSS | | dB | 0 | 0 | |
| EPRE ratio of PBCH_DMRS to SSS | | dB | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | dB | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | dB | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | dB | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | dB | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | dB | | | |
| SSB with index 0 | \hat{E}_s / I_{ot} | | dB | 3 | Power of SSB with index 0 is set to be above configured <i>rsrp-ThresholdSSB</i> |
| | N_{oc} | Config 1 | dBm/15kHz | -98 | |
| | | Config 2 | | -101 | |
| | \hat{E}_s / N_{oc} | | dB | 3 | |
| SS-RSRP ^{Note 3} | | dBm/ SCS | -95 | -95 | |
| SSB with index 1 | \hat{E}_s / I_{ot} | | dB | -17 | Power of SSB with index 1 is set to be below configured <i>rsrp-ThresholdSSB</i> |
| | N_{oc} | Config 1 | dBm/15kHz | -98 | |
| | | Config 2 | | -101 | |
| | \hat{E}_s / N_{oc} | | dB | -17 | |
| SS-RSRP ^{Note 3} | | dBm/ SCS | -115 | -115 | |
| I_0 ^{Note 2} | Config 1 | dBm | -65.3/9.36MHz | -65.3/9.36MHz | For symbols without SSB index 1 |
| | Config 2 | | -62.2/38.16MHz | -62.2/38.16MHz | |
| ss-PBCH-BlockPower | | dBm/ SCS | -5 | -5 | As defined in clause 6.3.2 in TS 38.331 [2]. |
| Configured UE transmitted power ($P_{MAX, f, c}$) | | dBm | 23 | 23 | As defined in clause 6.2.4 in TS 38.101-1. |
| PRACH Configuration | | | FR1 PRACH configuration 2 | FR1 PRACH configuration 3 | As defined in A.3.8.2. |
| Propagation Condition | | - | AWGN | AWGN | |
| <p>Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.</p> | | | | | |

| | |
|---------|--|
| Note 2: | SS-RSRP, Es/lot and lo levels have been derived from other parameters for information purpose. They are not settable parameters. |
| Note 3: | Void |
| Note 4: | The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required. |

A.6.3.2.2.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.6.3.2.2.2.1 SSB-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.2.1 for SSB-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.2.2 CSI-RS-based Random Access Preamble Transmission

In Test-2, to test the UE behavior specified in Clause 6.2.2.2.1 for CSI-RS-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the CSI-RS configured.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-OccasionList*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.2.3 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.2.4 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -30 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.3 SA: RRC Connection Release with Redirection

A.6.3.2.3.1 Redirection from NR in FR1 to NR in FR1

A.6.3.2.3.1.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR to NR requirements specified in clause 6.2.3.2.1.

A.6.3.2.3.1.2 Test Parameters

Supported test configurations are shown in table A.6.3.2.3.1.2-1. The time delay is tested by using the parameters in table A.6.3.2.3.1.2-2, and A.6.3.2.3.1.2-3.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2.

Table A.6.3.2.3.1.2-1: Redirection from NR to NR test configurations

| Config | Description |
|--|--|
| 1 | Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations | |

Table A.6.3.2.3.1.2-2: General test parameters for Redirection from NR to NR test case

| Parameter | Unit | Value | Comment |
|----------------------------|-------------------|-----------|--|
| Initial conditions | Active cell | Cell 1 | |
| | Neighbouring cell | Cell 2 | |
| Final condition | Active cell | Cell 2 | |
| Filter coefficient | | 0 | L3 filtering is not used |
| Access Barring Information | - | Not Sent | No additional delays in random access procedure. |
| Time offset between cells | | 3 μ s | Synchronous cells |
| T1 | s | 5 | |
| T2 | s | 2.3 | |

Table A.6.3.2.3.1.2-3: Cell specific test parameters for Redirection from NR to NR test case

| Parameter | Unit | Cell 1 | | Cell 2 | |
|-------------------------------------|------------|-----------------------------|----|--------|----|
| | | T1 | T2 | T1 | T2 |
| NR RF Channel Number | | 1 | | 2 | |
| Duplex mode | Config 1 | FDD | | | |
| | Config 2,3 | TDD | | | |
| TDD configuration | Config 1 | Not Applicable | | | |
| | Config 2 | TDDConf.1.1 | | | |
| | Config 3 | TDDConf.2.1 | | | |
| BW _{channel} | Config 1 | 10: N _{RB,c} = 52 | | | |
| | Config 2 | 10: N _{RB,c} = 52 | | | |
| | Config 3 | 40: N _{RB,c} = 106 | | | |
| BWP BW | Config 1 | 10: N _{RB,c} = 52 | | | |
| | Config 2 | 10: N _{RB,c} = 52 | | | |
| | Config 3 | 40: N _{RB,c} = 106 | | | |
| DRx Cycle | ms | Not Applicable | | | |
| PDSCH Reference measurement channel | Config 1 | SR.1.1 FDD | | | |
| | Config 2 | SR.1.1 TDD | | | |
| | Config 3 | SR2.1 TDD | | | |
| CORESET Reference Channel | Config 1 | CR.1.1 FDD | | | |
| | Config 2 | CR.1.1 TDD | | | |

| | | Config 3 | CR2.1 TDD | | | |
|--|------------------|--------------|---------------------------|--------|-----------|--------|
| OCNG Patterns | | | OCNG pattern 1 | | | |
| SMTC configuration | Config 1,2 | | SMTC.1 FR1 | | | |
| | Config 3 | | SMTC.2 FR1 | | | |
| PDSCH/PDCCH subcarrier spacing | Config 1,2 | kHz | 15 kHz | | | |
| | Config 3 | | 30 kHz | | | |
| PUCCH/PUSCH subcarrier spacing | Config 1,2 | kHz | 15 kHz | | | |
| | Config 3 | | 30 kHz | | | |
| PRACH configuration | | | FR1 PRACH configuration 1 | | | |
| BWP configuraiton | Initial DL BWP | | DLBWP.0.1 | | | |
| | Dedicated DL BWP | | DLBWP.1.1 | | | |
| | Initial UL BWP | | ULBWP.0.1 | | | |
| | Dedicated UL BWP | | ULBWP.1.1 | | | |
| EPRE ratio of PSS to SSS | | dB | 0 | | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | |
| N_{oc} ^{Note2} | | dBm/15kHz | -98 | | | |
| N_{oc} ^{Note2} | Config 1,2 | dBm/SCS | -98 | | | |
| | Config 3 | | -95 | | | |
| \hat{E}_s/I_{ot} | | dB | 4 | 4 | -infinity | 4 |
| \hat{E}_s/N_{oc} | | dB | 4 | 4 | -infinity | 4 |
| I_0 ^{Note3} | Config 1,2 | dBm/9.36MHz | -64.59 | -64.59 | -70.05 | -64.59 |
| | Config 3 | dBm/38.16MHz | -58.49 | -58.49 | -63.94 | -58.49 |
| Propagation condition | | - | AWGN | | | |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | |
| Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | | |
| Note 3: I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | | |

A.6.3.2.3.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 2240 ms from the beginning of time period T2.
The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{\text{connection_release_redirect_NR}} = T_{\text{RRC_procedure_delay}} + T_{\text{identify-NR}} + T_{\text{SI-NR}} + T_{\text{RACH}},$$

where:

$T_{\text{RRC_procedure_delay}} = 110$ ms in the test.

$T_{\text{identify-NR}} = 680$ ms in the test.

$T_{\text{SI-NR}} = 1280$ ms, it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target NR cell.

$T_{\text{RACH}} = 170$ ms in the test.

This gives a total of 2240 ms.

A.6.3.2.3.2 Redirection from NR in FR1 to E-UTRAN

A.6.3.2.3.2.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR to E-UTRAN requirements specified in clause 6.2.3.2.2.

A.6.3.2.3.2.2 Test Parameters

Supported test configurations are shown in table A.6.3.2.3.2.2-1. The time delay is tested by using the parameters in table A.6.3.2.3.2.2-2, A.6.3.2.3.2.2-3 and A.6.3.2.3.2.2-4.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2.

Table A.6.3.2.3.2.2-1: Redirection from NR to E-UTRAN test configurations

| Configuration | Description |
|---------------|---|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD |
| 4 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD |
| 5 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD |
| 6 | NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD |

Note: The UE is only required to be tested in one of the supported test configurations

Table A.6.3.2.3.2.2-2: General test parameters for Redirection from NR to E-UTRAN test case

| Parameter | Unit | Value | Comment |
|----------------------------|-------------------|-----------|--|
| Initial conditions | Active cell | Cell 1 | |
| | Neighbouring cell | Cell 2 | |
| Final condition | Active cell | Cell 2 | |
| Filter coefficient | | 0 | L3 filtering is not used |
| Access Barring Information | - | Not Sent | No additional delays in random access procedure. |
| Time offset between cells | | 3 μ s | Synchronous cells |
| T1 | s | 5 | |
| T2 | s | 2.3 | |

Table A.6.3.2.3.2.2-3: Cell specific test parameters for Redirection from NR to E-UTRAN (cell 1)

| Parameter | Unit | Cell 1 | |
|-------------------|------|--------|----|
| | | T1 | T2 |
| RF Channel Number | | | 1 |

| | | | |
|--|------------------|----------------|-----------------------------|
| Duplex mode | Config 1 | | FDD |
| | Config 2,3 | | TDD |
| TDD configuration | Config 1 | | Not Applicable |
| | Config 2 | | TDDConf.1.1 |
| | Config 3 | | TDDConf.2.1 |
| BW _{channel} | Config 1 | MHz | 10: N _{RB,c} = 52 |
| | Config 2 | | 10: N _{RB,c} = 52 |
| | Config 3 | | 40: N _{RB,c} = 106 |
| BWP BW | Config 1 | MHz | 10: N _{RB,c} = 52 |
| | Config 2 | | 10: N _{RB,c} = 52 |
| | Config 3 | | 40: N _{RB,c} = 106 |
| DRx Cycle | | ms | Not Applicable |
| PDSCH Reference measurement channel | Config 1 | | SR.1.1 FDD |
| | Config 2 | | SR.1.1 TDD |
| | Config 3 | | SR2.1 TDD |
| CORESET Reference Channel | Config 1 | | CR.1.1 FDD |
| | Config 2 | | CR.1.1 TDD |
| | Config 3 | | CR2.1 TDD |
| OCNG Patterns | | | OCNG pattern 1 |
| SMTc configuration | Config 1,2 | | SMTc.1 FR1 |
| | Config 3 | | SMTc.2 FR1 |
| PDSCH/PDCCH subcarrier spacing | Config 1,2 | kHz | 15 kHz |
| | Config 3 | | 30 kHz |
| PUCCH/PUSCH subcarrier spacing | Config 1,2 | kHz | 15 kHz |
| | Config 3 | | 30 kHz |
| PRACH configuration | | | FR1 PRACH configuration 1 |
| BWP configuraiton | Initial DL BWP | | DLBWP.0.1 |
| | Dedicated DL BWP | | DLBWP.1.1 |
| | Initial UL BWP | | ULBWP.0.1 |
| | Dedicated UL BWP | | ULBWP.1.1 |
| EPRE ratio of PSS to SSS | | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | |
| N_{oc} ^{Note2} | | dBm/15kHz Z | -98 |

| | | | | |
|---|------------|------------------|--------|--------|
| N_{oc} ^{Note2} | Config 1,2 | dBm/SCS | -98 | |
| | Config 3 | | -95 | |
| \hat{E}_s/I_{ot} | | dB | 4 | 4 |
| \hat{E}_s/N_{oc} | | dB | 4 | 4 |
| I_o ^{Note3} | Config 1,2 | dBm/ 9.36MHz | -64.59 | -64.59 |
| | Config 3 | dBm/ 38.16MHz | -58.49 | -58.49 |
| Propagation condition | | - | AWGN | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | |

Table A.6.3.2.3.2.2-4: Cell specific test parameters for Redirection from NR to E-UTRAN (cell 2)

| Parameter | Unit | Configuration | Cell 2 | |
|---|------|------------------|--|----|
| | | | T1 | T2 |
| RF channel number | | 1, 2, 3, 4, 5, 6 | 2 | |
| Duplex mode | | 1, 2, 3 | FDD | |
| | | 4, 5, 6 | TDD | |
| TDD special subframe configuration ^{Note1} | | 4, 5, 6 | 6 | |
| TDD uplink-downlink configuration ^{Note1} | | 4, 5, 6 | 1 | |
| BW _{channel} | MHz | 1, 2, 3, 4, 5, 6 | 5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100 | |
| PRACH Configuration ^{Note2} | | 1, 2, 3 | 4 | |
| | | 4, 5, 6 | 53 | |
| PDSCH parameters: DL Reference Measurement Channel ^{Note3} | | 1, 2, 3 | 5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD | |
| | | 4, 5, 6 | 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD | |
| PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note3} | | 1, 2, 3 | 5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD | |
| | | 4, 5, 6 | 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD | |
| OCNG Patterns ^{Note3} | | 1, 2, 3 | 5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD | |
| | | 4, 5, 6 | 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD | |
| PBCH_RA | dB | 1, 2, 3, 4, 5, 6 | 0 | |
| PBCH_RB | | | | |
| PSS_RA | | | | |
| SSS_RA | | | | |
| PCFICH_RB | | | | |
| PHICH_RA | | | | |

| | | | | |
|--|-----------|------------------|-----------|--------|
| PHICH_RB | | | | |
| PDCCH_RA | | | | |
| PDCCH_RB | | | | |
| PDSCH_RA | | | | |
| PDSCH_RB | | | | |
| OCNG_RA ^{Note4} | | | | |
| OCNG_RB ^{Note4} | | | | |
| N_{oc} ^{Note5} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -98 | |
| \bar{E}_s/N_{oc} | dB | 1, 2, 3, 4, 5, 6 | -Infinity | 4 |
| \bar{E}_s/I_{ot} ^{Note6} | dB | 1, 2, 3, 4, 5, 6 | -Infinity | 4 |
| RSRP ^{Note6} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -Infinity | -94 |
| SCH_RP ^{Note6} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -Infinity | -94 |
| I_o ^{Note6} | dBm/9MHz | 1, 2, 3, 4, 5, 6 | -70.22 | -64.76 |
| Propagation Condition | | 1, 2, 3, 4, 5, 6 | AWGN | |
| <p>Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].</p> <p>Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].</p> <p>Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.</p> <p>Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 6: \bar{E}_s/I_{ot}, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].</p> | | | | |

A.6.3.2.3.2.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 2205 ms from the beginning of time period T2. The rate of correct RRC connection release redirection to E-UTRAN observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{\text{connection_release_redirect_E-UTRA}} = T_{\text{RRC_procedure_delay}} + T_{\text{identify-E-UTRA}} + T_{\text{SI-E-UTRA}} + T_{\text{RACH}},$$

where:

$T_{\text{RRC_procedure_delay}} = 110$ ms in the test.

$T_{\text{identify-E-UTRA}} = 800$ ms in the test.

$T_{\text{SI-E-UTRA}} = 1280$ ms, it is the time required for receiving all the relevant system information as defined in TS 36.331 for the target E-UTRA cell.

$T_{\text{RACH}} = 15$ ms in the test.

This gives a total of 2205 ms.

A.6.4 Timing

A.6.4.1 UE transmit timing

A.6.4.1.1 NR UE Transmit Timing Test for FR1

A.6.4.1.1.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeB and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1.2.

Supported test configurations are shown in Table 6.4.1.1.1-1

Table A.6.4.1.1.1-1: Supported test configurations for FR1 PCell

| Configuration | Description |
|---------------|--|
| 1 | NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz |
| 2 | NR TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz |
| 3 | NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz |
| Note: | The UE is only required to be tested in one of the supported test configurations |

For this test a single NR cell is used. Table A.6.4.1.1.1-2 defines the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.6.4.1.1.1-3.

Table A.6.4.1.1.1-2: Cell Specific Test Parameters for UL Transmit Timing test

| Parameter | Unit | Config | Test1 | Test2 |
|-------------------------------------|------|--------|-----------------------------|------------------------|
| SSB ARFCN | | 1,2,3 | 1 | 1 |
| TDD configuration | | 1 | Not Applicable | |
| | | 2 | TDDConf.1.1 | |
| | | 3 | TDDConf.1.2 | |
| BW _{channel} | MHz | 1 | 10: N _{RB,c} = 52 | |
| | | 2 | 10: N _{RB,c} = 52 | |
| | | 3 | 40: N _{RB,c} = 106 | |
| Initial BWP Configuration | | 1,2,3 | DLBWP.0.1 ULBWP.0.1 | |
| Dedicated BWP Configuration | | 1,2,3 | DLBWP.1.1 ULBWP.1.1 | |
| DRx Cycle | ms | 1,2,3 | N/A | DRX.8 ^{Note5} |
| PDSCH Reference measurement channel | | 1 | SR.1.1 FDD | |
| | | 2 | SR.1.1 TDD | |
| | | 3 | SR.2.1 TDD | |
| RMSI CORESET Reference Channel | | 1 | CR.1.1 FDD | |
| | | 2 | CR.1.1 TDD | |
| | | 3 | CR.2.1 TDD | |
| Dedicated CORESET Reference Channel | | 1 | CCR.1.1 FDD | |
| | | 2 | CCR.1.1 TDD | |
| | | 3 | CCR.2.1 TDD | |
| OCNG Patterns | | 1,2,3 | OP.1 | |
| SSB configuration | | 1,2 | SSB.1 FR1 | |
| | | 3 | SSB.2 FR1 | |
| SMTc Configuration | | 1,2 | SMTc.1 | |
| | | 3 | SMTc.2 | |
| TRS configuration | | 1 | TRS.1.1 FDD | |
| | | 2 | TRS.1.1 TDD | |
| | | 3 | TRS.1.2 TDD | |
| EPRE ratio of PSS to SSS | dB | 1,2,3 | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |

| | | | | |
|---|-------------|-------|---------------------------|---------------------------|
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | |
| N_{oc} ^{Note2} | dBm/15 kHz | 1,2,3 | -98 | -98 |
| N_{oc} ^{Note2} | dBm/SCS | 1,2 | -98 | -98 |
| | | 3 | -95 | -95 |
| \hat{E}_s / I_{ot} | | 1,2,3 | 3 | 3 |
| \hat{E}_s / N_{oc} | | 1,2,3 | 3 | 3 |
| SS-RSRP ^{Note3} | dBm/SCS | 1,2 | -95 | -95 |
| | | 3 | -92 | -92 |
| I_o ^{Note3} | dBm/9.36MHz | 1,2 | -65.2 | -65.2 |
| | dBm/38.1MHz | 3 | -59.2 | -59.2 |
| Propagation condition | | 1,2,3 | AWGN | |
| SRS Config | | 1,2 | SRSCnf.1 ^{Note6} | SRSCnf.3 ^{Note6} |
| | | 3 | SRSCnf.1 ^{Note6} | SRSCnf.2 ^{Note6} |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 5: DRx related parameters are given in Table A.3.3.8-1</p> <p>Note 6: SRS configs are given in Table A.6.4.1.1.1-3</p> | | | | |

Table A.6.4.1.1.1-3: SRS Configuration for Timing Accuracy Test

| | Field | SRSCnf.1 | SRSCnf.2 | SRSCnf.3 | Comments |
|-----------------|-------------------------------------|--|----------|----------------------|---|
| SRS-ResourceSet | srs-ResourceSetId | 0 | 0 | 0 | |
| | srs-ResourceIdList | 0 | 0 | 0 | |
| | resourceType | Periodic | Periodic | Periodic | |
| | Usage | Codebook | Codebook | Codebook | |
| SRS-Resource | SRS-ResourceId | 0 | 0 | 0 | |
| | nrofSRS-Ports | Port1 | Port1 | Port1 | |
| | transmissionComb | n2 | n2 | n2 | |
| | combOffset-n2 | 0 | 0 | 0 | |
| | cyclicShift-n2 | 0 | 0 | 0 | |
| | resourceMapping startPosition | 0 | 0 | 0 | |
| | resourceMapping nrofSymbols | n1 | n1 | n1 | |
| | resourceMapping repetitionFactor | n1 | n1 | n1 | |
| | freqDomainPosition | 0 | 0 | 0 | |
| | freqDomainShift | 0 | 0 | 0 | |
| | freqHopping c-SRS | 14 for test configuration 1,2 25 for test configuration 3 | 25 | 14 | Matches N _{RB,c} |
| | freqHopping b-SRS | 0 | 0 | 0 | |
| | freqHopping b-hop | 0 | 0 | 0 | |
| | groupOrSequenceHopping | Neither | Neither | Neither | |
| | resourceType | Periodic | Periodic | Periodic | |
| | periodicityAndOffset-p | sl1, 0 | sl640, 5 | sl320, 3 | Offset to align with DRx periodicity |
| sequenceId | 0 | 0 | 0 | Any 10 bit number | |

Table A.6.4.1.1.1-4: Void**A.6.4.1.1.2 Test requirements**

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test

- 1) Setup NR PCell according to parameters given in Table A.6.4.1.1.1-1.
- 2) After connection set up with the cell, the test equipment will verify that the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB.
 - a. The N_{TA} offset value (in T_c units) is 25600
 - b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 7.1.2-1
- 3) The test system shall adjust the timing of the DL path by values given in Table A.6.4.1.1.2-1

Table A.6.4.1.1.2-1: Adjustment Value for DL Timing

| SCS of SSB signals (KHz) | Adjustment Value | |
|--------------------------|----------------------|----------------------|
| | Test1 | Test2 |
| 15 | +64*64T _c | +32*64T _c |
| 30 | +32*64T _c | +16*64T _c |

- 4) The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in clause 7.1.2 Table 7.1.2-3 until the UE transmit timing offset is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ respective to the first detected path (in time) of DL SSB. Skip this step for test 2 with DRX configured.
- 5) The test system shall verify that the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment

A.6.4.2 UE timer accuracy

A.6.4.3 Timing advance

A.6.4.3.1 SA FR1 timing advance adjustment accuracy

A.6.4.3.1.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3.

A.6.4.3.1.2 Test Parameters

Supported test configurations are shown in table A.6.4.3.1.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.6.4.3.1.2-2, A.6.4.3.1.2-3 and A.6.4.3.1.2-4.

In all test cases, single cell is used. Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.6.4.3.1.2-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be.

During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element, as specified in Clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31, which according to Clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements, with Timing Advance Command value specified in table A.6.4.3.1.2-2. This value shall result in changes of the timing advance used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in Clause 7.3.2.1, the UE adjusts its uplink timing at slot n+k for a timing advance command received in slot n. This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in Clause 5.2 in TS 38.321 [7], shall be configured so that it does not expire in the duration of the test.

Table A.6.4.3.1.2-1: Timing advance supported test configurations

| Config | Description |
|--|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations | |

Table A.6.4.3.1.2-2: General test parameters for timing advance

| Parameter | Unit | Value | Comment |
|--|------|-----------|--|
| RF channel number | | 1 | |
| Initial DL BWP | | DLBWP.0.1 | As specified in Table A.3.9.2.1-1 |
| Dedicated DL BWP | | DLBWP.1.1 | As specified in Table A.3.9.2.2-1 |
| Initial UL BWP | | ULBWP.0.1 | As specified in Table A.3.9.3.1-1 |
| Dedicated UL BWP | | ULBWP.1.1 | As specified in Table A.3.9.3.2-1 |
| Timing Advance Command (T_A) value during T1 | | 31 | $N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2 |
| Timing Advance Command (T_A) value during T2 | | 39 | For 15 kHz SCS $N_{TA_new} = N_{TA_old} + 8192 * T_c$ For 30 kHz SCS $N_{TA_new} = N_{TA_old} + 4096 * T_c$ (based on equation in clause 4.2 of TS 38.213 [3]) |
| T1 | s | 5 | |
| T2 | s | 5 | |

Table A.6.4.3.1.2-3: Cell specific test parameters for timing advance

| Parameter | | Unit | Test1 | |
|-------------------------------------|------------|------|-----------------------------|----|
| | | | T1 | T2 |
| Duplex mode | Config 1 | | FDD | |
| | Config 2,3 | | TDD | |
| TDD configuration | Config 1 | | Not Applicable | |
| | Config 2 | | TDDConf.1.1 | |
| | Config 3 | | TDDConf.2.1 | |
| BW _{channel} | Config 1 | MHz | 10: N _{RB,c} = 52 | |
| | Config 2 | | 10: N _{RB,c} = 52 | |
| | Config 3 | | 40: N _{RB,c} = 106 | |
| BWP BW | Config 1 | MHz | 10: N _{RB,c} = 52 | |
| | Config 2 | | 10: N _{RB,c} = 52 | |
| | Config 3 | | 40: N _{RB,c} = 106 | |
| DRx Cycle | | ms | Not Applicable | |
| PDSCH Reference measurement channel | Config 1 | | SR.1.1 FDD | |
| | Config 2 | | SR.1.1 TDD | |
| | Config 3 | | SR2.1 TDD | |
| CORESET Reference Channel | Config 1 | | CR.1.1 FDD | |
| | Config 2 | | CR.1.1 TDD | |
| | Config 3 | | CR2.1 TDD | |
| TRS configuration | Config 1,4 | | TRS.1.1 FDD | |
| | Config 2,5 | | TRS.1.1 TDD | |
| | Config 3,6 | | TRS.1.2 TDD | |
| OCNG Patterns | | | OCNG pattern 1 | |
| SMTc configuration | Config 1,2 | | SMTc.1 FR1 | |
| | Config 3 | | SMTc.2 FR1 | |

| | | | |
|--|------------|------------------|-----------|
| SSB configuration | Config 1,2 | | SSB.1 FR1 |
| | Config 3 | | SSB.2 FR1 |
| PDSCH/PDCCH subcarrier spacing | Config 1,2 | kHz | 15 kHz |
| | Config 3 | | 30 kHz |
| PUCCH/PUSCH subcarrier spacing | Config 1,2 | kHz | 15 kHz |
| | Config 3 | | 30 kHz |
| EPRE ratio of PSS to SSS | | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | |
| N_{oc} ^{Note2} | | dBm/15kHz | -98 |
| N_{oc} ^{Note2} | Config 1,2 | dBm/SCS | -98 |
| | Config 3 | | -95 |
| \hat{E}_s / I_{ot} | | dB | 3 |
| \hat{E}_s / N_{oc} | | dB | 3 |
| I_o ^{Note3} | Config 1,2 | dBm/ 9.36MHz | -67.57 |
| | Config 3 | dBm/ 38.16MHz | -62.58 |
| Propagation condition | | - | AWGN |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |
| Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | |
| Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | |

Table A.6.4.3.1.2-4: Sounding Reference Symbol Configuration for timing advance

| Field | | Value | Comment |
|--|------------|-------------|--|
| c-SRS | Config 1,2 | 12 | Frequency hopping is disabled |
| | Config 3 | 24 | |
| b-SRS | | 0 | |
| b-hop | | 0 | |
| freqDomainPosition | | 0 | Frequency domain position of SRS |
| freqDomainShift | | 0 | |
| groupOrSequenceHopping | | neither | No group or sequence hopping |
| SRS-PeriodicityAndOffset | | sl5=0 | Once every 5 slots |
| pathlossReferenceRS | | ssb-Index=0 | SSB #0 is used for SRS path loss estimation |
| usage | | Codebook | Codebook based UL transmission |
| startPosition | | 0 | resourceMapping setting. SRS on last symbol of slot, and 1 symbols for SRS without repetition. |
| nrofSymbols | | n1 | |
| repetitionFactor | | n1 | |
| combOffset-n2 | | 0 | transmissionComb setting |
| cyclicShift-n2 | | 0 | |
| nrofSRS-Ports | | port1 | Number of antenna ports used for SRS transmission |
| Note: For further information see clause 6.3.2 in TS 38.331 [2]. | | | |

A.6.4.3.1.3 Test Requirements

The UE shall apply the signalled Timing Advance value to the transmission timing at the designated activation time i.e. $k+1$ slots after the reception of the timing advance command, where $k=5$.

The Timing Advance adjustment accuracy shall be within the limits specified in clause 7.3.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.6.5 Signalling characteristics

A.6.5.1 Radio link Monitoring

In the following clause, any uplink signal transmitted by the UE is used for detecting the In-/Out-of-Sync state of the UE. In terms of measurement, the uplink signal is verified on the basis of the UE output power:

For intra-band contiguous carrier aggregation, transmit OFF power is measured as the mean power per component carrier.

For UE with multiple transmit antennas, transmit OFF power is measured as the mean power at each transmit connector.

- UE output power higher than Transmit OFF power -50 dBm (as defined in TS 38.101-1 [18]) means uplink signal
- UE output power equal to or less than Transmit OFF power -50 dBm (as defined in TS 38.101-1 [18]) means no uplink signal.

A.6.5.1.1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode

A.6.5.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.6.5.1.1.1-1. The test parameters are given in Tables A.6.5.1.1.1-2, A.6.5.1.1.1-3, and A.6.5.1.1.1-4 below. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.6.5.1.1.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 1.

Table A.6.5.1.1.1-1: Supported test configurations for FR1 PCell

| Configuration | Description |
|---------------|--|
| 1 | FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz |
| 2 | TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz |
| 3 | TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz |
| Note: | The UE is only required to pass in one of the supported test configurations in FR1 |

Table A.6.5.1.1.1-2: General test parameters for FR1 out-of-sync testing in non-DRX mode

| Parameter | Unit | Value |
|--------------------------------|----------------|-----------------------------|
| | | Test 1 |
| Active PCell | | Cell 1 |
| RF Channel Number | | 1 |
| Duplex mode | Config 1 | FDD |
| | Config 2, 3 | TDD |
| BW _{channel} | Config 1 | 10: N _{RB,c} = 52 |
| | Config 2 | 10: N _{RB,c} = 52 |
| | Config 3 | 40: N _{RB,c} = 106 |
| DL initial BWP configuration | Config 1, 2, 3 | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1, 2, 3 | DLBWP.1.1 |
| UL initial BWP configuration | Config 1, 2, 3 | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1, 2, 3 | ULBWP.1.1 |
| TDD Configuration | Config 1 | Not Applicable |
| | Config 2 | TDDConf.1.1 |
| | Config 3 | TDDConf.2.1 |
| CORESET Reference Channel | Config 1 | CR.1.1 FDD |
| | Config 2 | CR.1.1 TDD |
| | Config 3 | CR.2.1 TDD |
| SSB Configuration | Config 1 | SSB.1 FR1 |
| | Config 2 | SSB.1 FR1 |
| | Config 3 | SSB.2 FR1 |

| | | | |
|---|--|------|-------------------|
| SMTC Configuration | Config 1, 2 | | SMTC.1 |
| | Config 3 | | SMTC.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2 | | 15 kHz |
| | Config 3 | | 30 kHz |
| PRACH Configuration | Config 1, 2 | | Table A.3.8.2.1-1 |
| | Config 3 | | Table A.3.8.2.1-1 |
| SSB index assigned as RLM RS | | | 0 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| Correlation Matrix and Antenna Configuration | | | 2x2 Low |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average SSS RE energy | | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| DRX | | | <i>OFF</i> |
| Gap pattern ID | | | <i>gp0</i> |
| Layer 3 filtering | | | <i>Enabled</i> |
| T310 timer | | ms | 0 |
| T311 timer | | ms | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |
| CSI-RS configuration for CSI reporting | Config 1 | | CSI-RS.1.1 FDD |
| | Config 2 | | CSI-RS.1.1 TDD |
| | Config 3 | | CSI-RS.2.1 TDD |
| CSI-RS for tracking | Config 1 | | TRS.1.1 FDD |
| | Config 2 | | TRS.1.1 TDD |
| | Config 3 | | TRS.1.2 TDD |
| T1 | s | 0.2 | |
| T2 | s | 0.48 | |
| T3 | s | 0.48 | |
| D1 | s | 0.44 | |
| Note 1: All configurations are assigned to the UE prior to the start of time period T1. | | | |
| Note 2: UE-specific PDCCH is not transmitted after T1 starts. | | | |

Table A.6.5.1.1-3: Cell specific test parameters for FR1 (Cell 1) for out-of-sync radio link monitoring tests in non-DRX mode

| Parameter | | Unit | Test 1 | | |
|--|----------------|-------|-------------------|----|-----|
| | | | T1 | T2 | T3 |
| EPRE ratio of PDCCH DMRS to SSS | | dB | 4 | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | dB | 0 | | |
| EPRE ratio of PBCH DMRS to SSS | | dB | 0 | | |
| EPRE ratio of PBCH to PBCH DMRS | | dB | | | |
| EPRE ratio of PSS to SSS | | dB | | | |
| EPRE ratio of PDSCH DMRS to SSS | | dB | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | dB | | | |
| EPRE ratio of OCNG DMRS to SSS | | dB | | | |
| EPRE ratio of OCNG to OCNG DMRS | | dB | | | |
| SNR on RLM-RS | Config 1 | dB | | | |
| | Config 2 | | 1 | -7 | -15 |
| | Config 3 | | 1 | -7 | -15 |
| SNR on other channels and signals | Config 1, 2, 3 | dB | 1 | | |
| N_{oc} | Config 1 | dBm/ | -98 | | |
| | Config 2 | 15kHz | -98 | | |
| | Config 3 | z | -98 | | |
| N_{oc} | Config 1 | dBm/ | -98 | | |
| | Config 2 | SCS | -98 | | |
| | Config 3 | | -95 | | |
| Propagation condition | | | TDL-C 300ns 100Hz | | |
| <p>Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.</p> <p>Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.</p> <p>Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure A.6.5.1.1-1.</p> <p>Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.</p> | | | | | |

Table A.6.5.1.1-4: Measurement gap configuration for out-of-sync tests in non-DRX mode

| Field | Test 1 |
|--|--------|
| | Value |
| gapOffset | 0 |
| <p>Note: Ensure that RLM RS is partially overlapped with measurement gap</p> | |

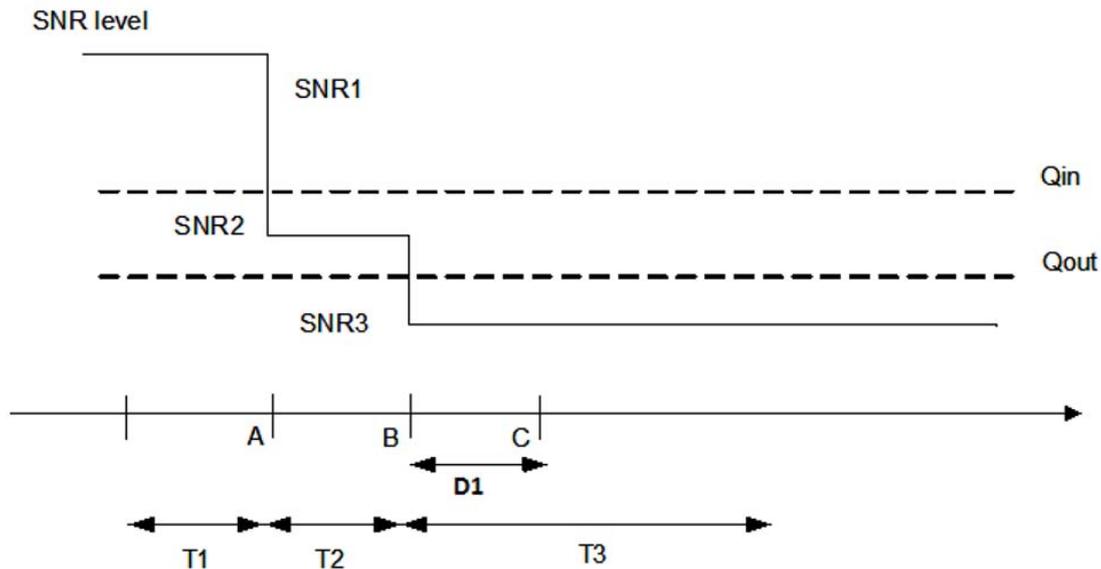


Figure A.6.5.1.1.1-1: SNR variation for out-of-sync testing

A.6.5.1.1.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.1.2 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode

A.6.5.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.6.5.1.2.1-1. The test parameters are given in Tables A.6.5.1.2.1-2, and A.6.5.1.2.1-3 below. There is one cell (Cell 1), which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.1.2.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

Table A.6.5.1.2.1-1: Supported test configurations for FR1 PCell

| Configuration | Description |
|---------------|--|
| 1 | FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz |
| 2 | TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz |
| 3 | TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz |
| Note: | The UE is only required to pass in one of the supported test configurations in FR1 |

Table A.6.5.1.2.1-2: General test parameters for FR1 in-sync testing in non-DRX mode

| Parameter | | Unit | Value |
|--|--|------|-----------------------------|
| | | | Test 1 |
| Active PCell | | | Cell 1 |
| RF Channel Number | | | 1 |
| Duplex mode | Config 1 | | FDD |
| | Config 2, 3 | | TDD |
| BW _{channel} | Config 1 | MHz | 10: N _{RB,c} = 52 |
| | Config 2 | | 10: N _{RB,c} = 52 |
| | Config 3 | | 40: N _{RB,c} = 106 |
| DL initial BWP configuration | Config 1, 2, 3 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1, 2, 3 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1, 2, 3 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1, 2, 3 | | ULBWP.1.1 |
| TDD Configuration | Config 1 | | Not Applicable |
| | Config 2 | | TDDConf.1.1 |
| | Config 3 | | TDDConf.2.1 |
| CORESET Reference Channel | Config 1 | | CR.1.1 FDD |
| | Config 2 | | CR.1.1 TDD |
| | Config 3 | | CR.2.1 TDD |
| SSB Configuration | Config 1 | | SSB.1 FR1 |
| | Config 2 | | SSB.1 FR1 |
| | Config 3 | | SSB.2 FR1 |
| SMTTC Configuration | Config 1, 2 | | SMTTC.1 |
| | Config 3 | | SMTTC.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2 | | 15 kHz |
| | Config 3 | | 30 kHz |
| PRACH Configuration | Config 1, 2 | | Table A.3.8.2.1-1 |
| | Config 3 | | Table A.3.8.2.1-1 |
| SSB index assigned as RLM RS | | | 0 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| Correlation Matrix and Antenna Configuration | | | 2x2 Low |
| In sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 4 |
| | Ratio of hypothetical PDCCH RE energy to average SSS RE energy | dB | 0 |

| | | | |
|---|--|-----|-----------------|
| | Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | dB | 0 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average SSS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| DRX | | | <i>OFF</i> |
| Gap pattern ID | | | N.A. |
| Layer 3 filtering | | | <i>Enabled</i> |
| T310 timer | | ms | 1000 |
| T311 timer | | ms | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |
| CSI-RS configuration for CSI reporting | Config 1 | | CSI-RS.1.1 FDD |
| | Config 2 | | CSI-RS.1.1 TDD |
| | Config 3 | | CSI-RS.2.1 TDD |
| CSI-RS for tracking | Config 1, 4 | | TRS.1.1 FDD |
| | Config 2, 5 | | TRS.1.1 TDD |
| | Config 3, 6 | | TRS.1.2 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 0.2 |
| T3 | | s | 0.24 |
| T4 | | s | 0.2 |
| T5 | | s | 0.88 |
| D1 | | s | 0.84 |
| Note 1: All configurations are assigned to the UE prior to the start of time period T1. | | | |
| Note 2: UE-specific PDCCH is not transmitted after T1 starts. | | | |

Table A.6.5.1.2.1-3: Cell specific test parameters for FR1 (Cell 1) for in-sync radio link monitoring tests in non-DRX mode

| Parameter | | Unit | Test 1 | | | | | |
|---|----------|----------------|-------------------|----|-----|------|----|---|
| | | | T1 | T2 | T3 | T4 | T5 | |
| EPRE ratio of PDCCH DMRS to SSS | | dB | 4 | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | dB | 0 | | | | | |
| EPRE ratio of PBCH DMRS to SSS | | dB | 0 | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | dB | | | | | | |
| EPRE ratio of PSS to SSS | | dB | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | dB | | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | dB | | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | dB | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | dB | | | | | | |
| SNR on RLM-RS | | dB | | | | | | 1 |
| Config 1 | | | 1 | -7 | -15 | -4.5 | 1 | |
| Config 2 | | | 1 | -7 | -15 | -4.5 | 1 | |
| SNR on other channels and signals | | Config 1, 2, 3 | dB | 1 | | | | |
| N_{oc} | Config 1 | dBm/ | -98 | | | | | |
| | Config 2 | 15 | -98 | | | | | |
| | Config 3 | kHz | -98 | | | | | |
| N_{oc} | Config 1 | dBm/ | -98 | | | | | |
| | Config 2 | SCS | -98 | | | | | |
| | Config 3 | | -95 | | | | | |
| Propagation condition | | | TDL-C 300ns 100Hz | | | | | |
| <p>Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.</p> <p>Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.</p> <p>Note 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.6.5.1.2.1-1.</p> <p>Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 and T4 is modified as specified in clause A.3.6.</p> | | | | | | | | |

Table A.6.5.1.2.1-4: Void

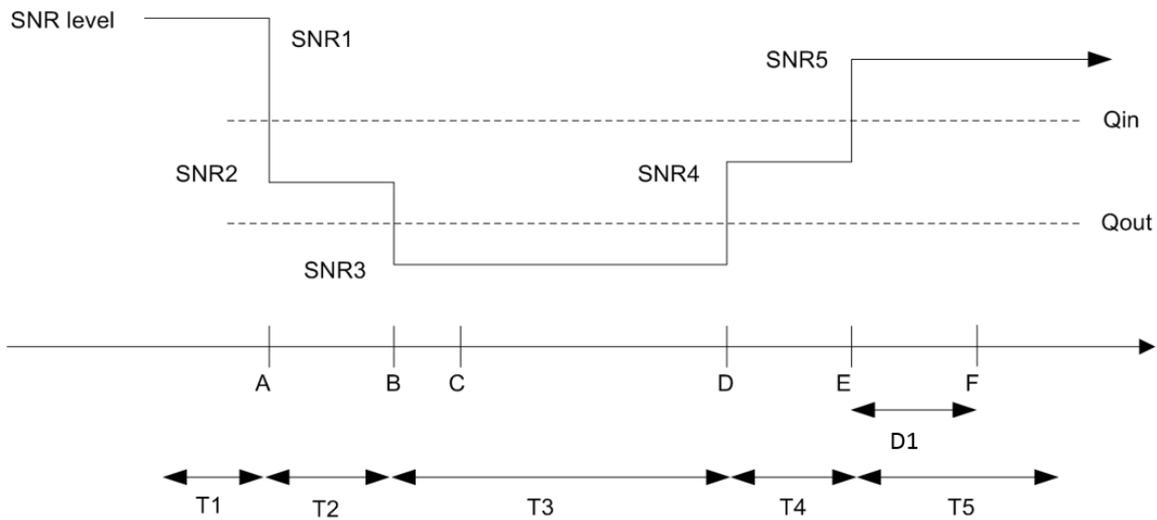


Figure A.6.5.1.2.1-1: SNR variation for in-sync testing

A.6.5.1.2.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.1.3 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode

A.6.5.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.6.5.1.3.1-1. The test parameters are given in Tables A.6.5.1.3.1-2, and A.6.5.1.3.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.6.5.1.3.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 2.

Table A.6.5.1.3.1-1: Supported test configurations for FR1 PCell

| Configuration | Description |
|---------------|--|
| 1 | FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz |
| 2 | TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz |
| 3 | TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz |
| Note: | The UE is only required to pass in one of the supported test configurations in FR1 |

Table A.6.5.1.3.1-2: General test parameters for FR1 out-of-sync testing in DRX mode

| Parameter | | Unit | Value |
|--|--------------------------------|------|-----------------------------|
| | | | Test 1 |
| Active PCell | | | Cell 1 |
| RF Channel Number | | | 1 |
| Duplex mode | Config 1 | | FDD |
| | Config 2, 3 | | TDD |
| BW _{channel} | Config 1 | MHz | 10: N _{RB,c} = 52 |
| | Config 2 | | 10: N _{RB,c} = 52 |
| | Config 3 | | 40: N _{RB,c} = 106 |
| DL initial BWP configuration | Config 1, 2, 3 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1, 2, 3 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1, 2, 3 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1, 2, 3 | | ULBWP.1.1 |
| TDD Configuration | Config 1 | | Not Applicable |
| | Config 2 | | TDDConf.1.1 |
| | Config 3 | | TDDConf.2.1 |
| CORESET Reference Channel | Config 1 | | CR.1.1 FDD |
| | Config 2 | | CR.1.1 TDD |
| | Config 3 | | CR.2.1 TDD |
| SSB Configuration | Config 1 | | SSB.1 FR1 |
| | Config 2 | | SSB.1 FR1 |
| | Config 3 | | SSB.2 FR1 |
| SMTC Configuration | Config 1, 2 | | SMTC.1 |
| | Config 3 | | SMTC.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2 | | 15 kHz |
| | Config 3 | | 30 kHz |
| PRACH Configuration | Config 1, 2 | | Table A.3.8.2.1-1 |
| | Config 3 | | Table A.3.8.2.1-1 |
| SSB index assigned as RLM RS | | | 0 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| Correlation Matrix and Antenna Configuration | | | 2x2 Low |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |

| | | | |
|---|--|----|-----------------|
| | Ratio of hypothetical PDCCH RE energy to average SSS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| DRX Configuration | | | DRX.3 |
| Gap pattern ID | | | N.A. |
| Layer 3 filtering | | | <i>Enabled</i> |
| T310 timer | | ms | 0 |
| T311 timer | | ms | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |
| CSI-RS configuration for CSI reporting | Config 1 | | CSI-RS.1.1 FDD |
| | Config 2 | | CSI-RS.1.1 TDD |
| | Config 3 | | CSI-RS.2.1 TDD |
| CSI-RS for tracking | Config 1 | | TRS.1.1 FDD |
| | Config 2 | | TRS.1.1 TDD |
| | Config 3 | | TRS.1.2 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 0.68 |
| T3 | | s | 0.68 |
| D1 | | s | 0.64 |
| Note 1: All configurations are assigned to the UE prior to the start of time period T1. | | | |
| Note 2: UE-specific PDCCH is not transmitted after T1 starts. | | | |

Table A.6.5.1.3.1-3: Cell specific test parameters for FR1 (Cell 1) for out-of-sync radio link monitoring tests in DRX mode

| Parameter | | Unit | Test 1 | | |
|---|----------------|--------|-------------------|----|-----|
| | | | T1 | T2 | T3 |
| EPRE ratio of PDCCH DMRS to SSS | | dB | 4 | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | dB | 0 | | |
| EPRE ratio of PBCH DMRS to SSS | | dB | 0 | | |
| EPRE ratio of PBCH to PBCH DMRS | | dB | | | |
| EPRE ratio of PSS to SSS | | dB | | | |
| EPRE ratio of PDSCH DMRS to SSS | | dB | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | dB | | | |
| EPRE ratio of OCNG DMRS to SSS | | dB | | | |
| EPRE ratio of OCNG to OCNG DMRS | | dB | | | |
| SNR on RLM-RS | Config 1 | dB | | | |
| | Config 2 | | 1 | -7 | -15 |
| | Config 3 | | 1 | -7 | -15 |
| SNR on other channels and signals | Config 1, 2, 3 | dB | 1 | | |
| N_{oc} | Config 1 | dBm/15 | -98 | | |
| | Config 2 | kHz | -98 | | |
| | Config 3 | | -98 | | |
| N_{oc} | Config 1 | dBm/S | -98 | | |
| | Config 2 | CS | -98 | | |
| | Config 3 | | -95 | | |
| Propagation condition | | | TDL-C 300ns 100Hz | | |
| Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | |
| Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. | | | | | |
| Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs. | | | | | |
| Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure A.6.5.1.3.1-1. | | | | | |
| Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6. | | | | | |

Table A.6.5.1.3.1-4: Void**Table A.6.5.1.3.1-5: Void****Table A.6.5.1.3.1-6: Void**

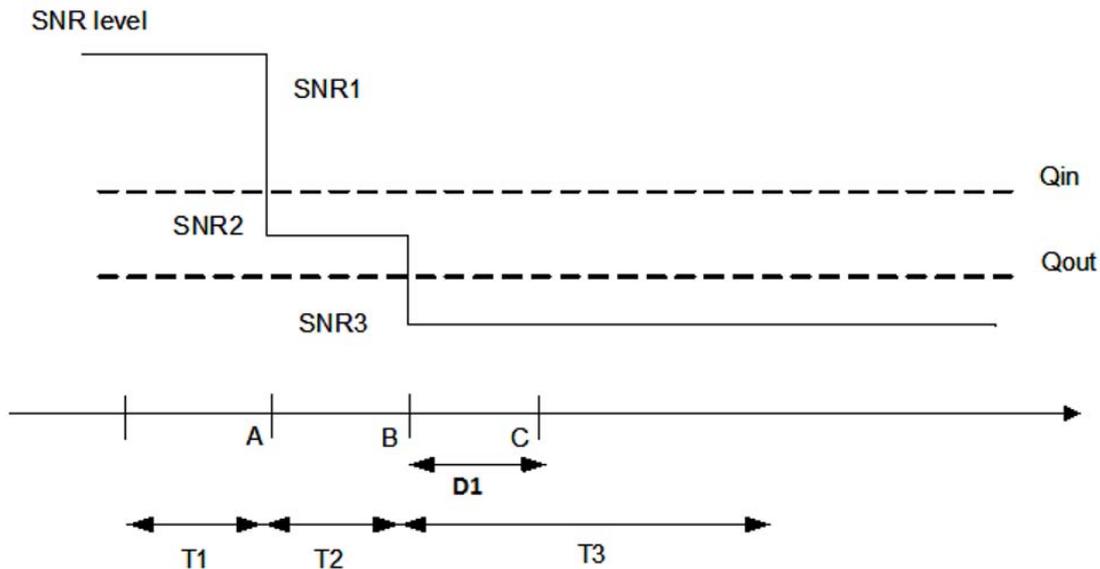


Figure A.6.5.1.3.1-1: SNR variation for out-of-sync testing

A.6.5.1.3.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.1.4 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode

A.6.5.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.6.5.1.4.1-1. The test parameters are given in Tables A.6.5.1.4.1-2, and A.6.5.1.4.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.1.4.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.6.5.1.4.1-1: Supported test configurations for FR1 PCell

| Configuration | Description |
|---------------|--|
| 1 | FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz |
| 2 | TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz |
| 3 | TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz |
| Note: | The UE is only required to pass in one of the supported test configurations in FR1 |

Table A.6.5.1.4.1-2: General test parameters for FR1 in-sync testing in DRX mode

| Parameter | | Unit | Value Test 1 |
|--|--------------------------------|------|-----------------------------|
| Active PCell | | | Cell 1 |
| RF Channel Number | | | 1 |
| Duplex mode | Config 1 | | FDD |
| | Config 2, 3 | | TDD |
| BW _{channel} | Config 1 | MHz | 10: N _{RB,c} = 52 |
| | Config 2 | | 10: N _{RB,c} = 52 |
| | Config 3 | | 40: N _{RB,c} = 106 |
| DL initial BWP configuration | Config 1, 2, 3 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1, 2, 3 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1, 2, 3 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1, 2, 3 | | ULBWP.1.1 |
| TDD Configuration | Config 1 | | Not Applicable |
| | Config 2 | | TDDConf.1.1 |
| | Config 3 | | TDDConf.2.1 |
| CORESET Reference Channel | Config 1 | | CR.1.1 FDD |
| | Config 2 | | CR.1.1 TDD |
| | Config 3 | | CR.2.1 TDD |
| SSB Configuration | Config 1 | | SSB.1 FR1 |
| | Config 2 | | SSB.1 FR1 |
| | Config 3 | | SSB.2 FR1 |
| SMTC Configuration | Config 1, 2 | | SMTC.1 |
| | Config 3 | | SMTC.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2 | | 15 kHz |
| | Config 3 | | 30 kHz |
| PRACH Configuration | Config 1, 2 | | Table A.3.8.2.1-1 |
| | Config 3 | | Table A.3.8.2.1-1 |
| SSB index assigned as RLM RS | | | 0 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| Correlation Matrix and Antenna Configuration | | | 2x2 Low |
| In sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 4 |

| | | | |
|--|---|----------------|-----------------|
| | Ratio of hypothetical PDCCH RE energy to average SSS RE energy | dB | 0 |
| | Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | dB | 0 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average SSS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| | DRX Configuration | | DRX.3 |
| Gap pattern ID | | N.A. | |
| Layer 3 filtering | | <i>Enabled</i> | |
| T310 timer | ms | 2000 | |
| T311 timer | ms | 1000 | |
| N310 | | 1 | |
| N311 | | 1 | |
| CSI-RS configuration for CSI reporting | Config 1 | | CSI-RS.1.1 FDD |
| | Config 2 | | CSI-RS.1.1 TDD |
| | Config 3 | | CSI-RS.2.1 TDD |
| CSI-RS for tracking | Config 1 | | TRS.1.1 FDD |
| | Config 2 | | TRS.1.1 TDD |
| | Config 3 | | TRS.1.2 TDD |
| T1 | s | 0.2 | |
| T2 | s | 0.2 | |
| T3 | s | 0.64 | |
| T4 | s | 0.2 | |
| T5 | s | 0.88 | |
| D1 | s | 0.84 | |
| Note 1: | All configurations are assigned to the UE prior to the start of time period T1. | | |
| Note 2: | UE-specific PDCCH is not transmitted after T1 starts. | | |

Table A.6.5.1.4.1-3: Cell specific test parameters for FR1 (Cell 1) for in-sync radio link monitoring tests in DRX mode

| Parameter | | Unit | Test 1 | | | | |
|---|----------|-------------|-------------------|----|-----|------|----|
| | | | T1 | T2 | T3 | T4 | T5 |
| EPRE ratio of PDCCH DMRS to SSS | | dB | 4 | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | dB | 0 | | | | |
| EPRE ratio of PBCH DMRS to SSS | | dB | 0 | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | dB | | | | | |
| EPRE ratio of PSS to SSS | | dB | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | dB | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | dB | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | dB | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | dB | | | | | |
| SNR on RLM-RS | | dB | | | | | |
| Config 1 | | | 1 | -7 | -15 | -4.5 | 1 |
| Config 2 | | | 1 | -7 | -15 | -4.5 | 1 |
| SNR on other channels and signals | | dB | 1 | | | | |
| Config 1, 2, 3 | | | | | | | |
| N_{oc} | Config 1 | dBm/15 | -98 | | | | |
| | Config 2 | kHz | -98 | | | | |
| | Config 3 | | -98 | | | | |
| N_{oc} | Config 1 | dBm/S CS | -98 | | | | |
| | Config 2 | | -98 | | | | |
| | Config 3 | | -95 | | | | |
| Propagation condition | | | TDL-C 300ns 100Hz | | | | |
| <p>Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.</p> <p>Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.</p> <p>Note 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.6.5.1.4.1-1.</p> <p>Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 and T4 is modified as specified in clause A.3.6.</p> | | | | | | | |

Table A.6.5.1.4.1-4: Void

Table A.6.5.1.4.1-5: Void

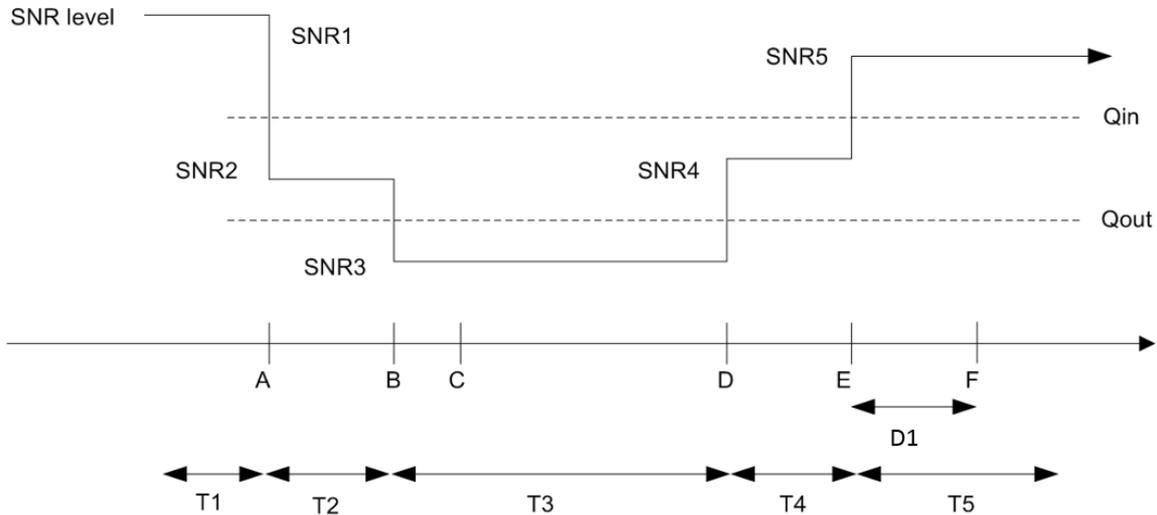


Figure A.6.5.1.4.1-1: SNR variation for in-sync testing.

A.6.5.1.4.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.1.5 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode

A.6.5.1.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.6.5.1.5.1-1, A.6.5.1.5.1-2, A.6.5.1.5.1-3, and A.6.5.1.5.1-3A below. There is one cell, cell 1 which is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.6.5.1.5.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 is configured as the BFD-RS.

Table A.6.5.1.5.1-1: Supported test configurations for FR1 PCell

| Configuration | Description |
|----------------------|--|
| 1 | FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth |
| 2 | TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth |
| 3 | TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth |
| Note: | The UE is only required to pass in one of the supported test configurations in FR1 |

Table A.6.5.1.5.1-2: General test parameters for FR1 PCell for CSI-RS out-of-sync testing in non-DRX mode

| Parameter | | Unit | Value |
|--|---|------|----------------------------|
| | | | Test 1 |
| Active PCell | | | Cell 1 |
| RF Channel Number | | | 1 |
| Duplex mode | Config 1 | | FDD |
| | Config 2, 3 | | TDD |
| TDD Configuration | Config 1 | | Not Applicable |
| | Config 2 | | TDDConf.1.1 |
| | Config 3 | | TDDConf.2.1 |
| DL initial BWP configuration | Config 1, 2, 3 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1, 2, 3 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1, 2, 3 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1, 2, 3 | | ULBWP.1.1 |
| CORESET Reference Channel | Config 1 | | CR.1.1 FDD |
| | Config 2 | | CR.1.1 TDD |
| | Config 3 | | CR.2.1 TDD |
| SSB Configuration | Config 1 | | SSB.1 FR1 |
| | Config 2 | | SSB.1 FR1 |
| | Config 3 | | SSB.2 FR1 |
| SMTC Configuration | Config 1, 2 | | SMTC.1 |
| | Config 3 | | SMTC.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2 | | 15 kHz |
| | Config 3 | | 30 kHz |
| TRS configuration | Config 1 | | TRS.1.1 FDD |
| | Config 2 | | TRS.1.1 TDD |
| | Config 3 | | TRS.1.2 TDD |
| CSI-RS for RLM | Config 1 | | Resource #4 in TRS.1.1 FDD |
| | Config 2 | | Resource #4 in TRS.1.1 TDD |
| | Config 3 | | Resource #4 in TRS.1.2 TDD |
| TCI configuration for PDCCH/PDSCH | | | TCI.State.0 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| Correlation Matrix and Antenna Configuration | | | 2x2 Low |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| DRX | | | OFF |
| Gap pattern ID | | | gp0 |
| Layer 3 filtering | | | Enabled |
| T310 timer | | ms | 0 |
| T311 timer | | ms | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |

| | | | |
|---|----------|---|----------------|
| CSI-RS configuration for CSI reporting | Config 1 | | CSI-RS.1.1 FDD |
| | Config 2 | | CSI-RS.1.1 TDD |
| | Config 3 | | CSI-RS.2.1 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 0.48 |
| T3 | | s | 0.48 |
| D1 | | s | 0.44 |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | |

Table A.6.5.1.5.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in non-DRX mode

| Parameter | | Unit | Test 1 | | |
|---|----------|-----------|-------------------|----|-----|
| | | | T1 | T2 | T3 |
| PDCCH_beta | | dB | 4 | | |
| PDCCH_DMRS_beta | | dB | 4 | | |
| PBCH_beta | | dB | 0 | | |
| PSS_beta | | dB | | | |
| SSS_beta | | dB | | | |
| PDSCH_beta | | dB | | | |
| OCNG_beta | | dB | | | |
| SNR on RLM-RS | Config 1 | dB | 1 | -7 | -15 |
| | Config 2 | | 1 | -7 | -15 |
| | Config 3 | | 1 | -7 | -15 |
| SNR on other channels and signals | Config 1 | dB | 1 | | |
| | Config 2 | | 1 | | |
| | Config 3 | | 1 | | |
| N_{oc} | Config 1 | dBm/15kHz | -98 | | |
| | Config 2 | | -98 | | |
| | Config 3 | | -98 | | |
| Propagation condition | | | TDL-C 300ns 100Hz | | |
| Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | |
| Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | |
| Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | |
| Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1. | | | | | |
| Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. | | | | | |
| Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG. | | | | | |
| Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs. | | | | | |
| Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.6.5.1.5.1-1. | | | | | |
| Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is [A.3.6]. | | | | | |

Table A.6.5.1.5.1-3A: Measurement gap configuration for FR1 CSI-RS out-of-sync radio link monitoring in non-DRX mode

| Field | Test 1 |
|--------------|--------|
| | Value |
| gapOffset | 0 |
| Note 1: Void | |

Table A.6.5.1.5.1-4: Void

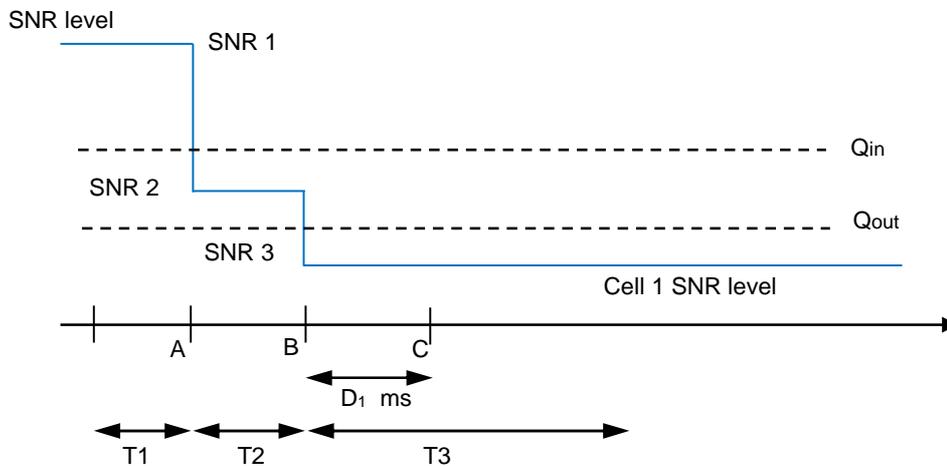


Figure A.6.5.1.5.1-1: SNR variation for CSI-RS out-of-sync testing

A.6.5.1.5.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During time durations T1, T2 and T3, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 no later than time point C (D_1 ms after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.1.6 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode

A.6.5.1.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR1 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.6.5.1.6.1-1, A.6.5.1.6.1-2, and A.6.5.1.6.1-3 below. There is one cells, cell 1 which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.1.6.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is not enabled. In the test, SSB0 is configured as the BFD-RS.

Table A.6.5.1.6.1-1: Supported test configurations for FR1 PCell

| Configuration | Description |
|--|---|
| 1 | FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth |
| 2 | TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth |
| 3 | TDD duplex mode, 30kHz SSB SCS, 40 MHz bandwidth |
| Note: The UE is only required to pass in one of the supported test configurations in FR1 | |

Table A.6.5.1.6.1-2: General test parameters for FR1 PCell for CSI-RS in-sync testing in non-DRX mode

| Parameter | | Unit | Value |
|--|--------------------------------|------|----------------------------|
| | | | Test 1 |
| Active PCell | | | Cell 1 |
| RF Channel Number | | | 1 |
| Duplex mode | Config 1 | | FDD |
| | Config 2, 3 | | TDD |
| TDD Configuration | Config 1 | | Not Applicable |
| | Config 2 | | TDDConf.1.1 |
| | Config 3 | | TDDConf.2.1 |
| DL initial BWP configuration | Config 1, 2, 3 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1, 2, 3 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1, 2, 3 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1, 2, 3 | | ULBWP.1.1 |
| CORESET Reference Channel | Config 1 | | CR.1.1 FDD |
| | Config 2 | | CR.1.1 TDD |
| | Config 3 | | CR.2.1 TDD |
| SSB Configuration | Config 1 | | SSB.1 FR1 |
| | Config 2 | | SSB.1 FR1 |
| | Config 3 | | SSB.2 FR1 |
| SMTTC Configuration | Config 1, 2 | | SMTTC.1 |
| | Config 3 | | SMTTC.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2 | | 15 kHz |
| | Config 3 | | 30 kHz |
| TRS configuration | Config 1 | | TRS.1.1 FDD |
| | Config 2 | | TRS.1.1 TDD |
| | Config 3 | | TRS.1.2 TDD |
| CSI-RS for RLM | Config 1 | | Resource #4 in TRS.1.1 FDD |
| | Config 2 | | Resource #4 in TRS.1.1 TDD |
| | Config 3 | | Resource #4 in TRS.1.2 TDD |
| TCI configuration for PDCCH/PDSCH | | | TCI.State.0 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| Correlation Matrix and Antenna Configuration | | | 2x2 Low |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |

| | | | |
|---|---|-----|-----------------|
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| In sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 4 |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| DRX | | | <i>OFF</i> |
| Gap pattern ID | | | N.A. |
| Layer 3 filtering | | | <i>Enabled</i> |
| T310 timer | | ms | 1000 |
| T311 timer | | ms | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |
| CSI-RS configuration for CSI reporting | Config 1 | | CSI-RS.1.1 FDD |
| | Config 2 | | CSI-RS.1.1 TDD |
| | Config 3 | | CSI-RS.2.1 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 0.2 |
| T3 | | s | 0.44 |
| T4 | | s | 0.2 |
| T5 | | s | 0.88 |
| T6 | | S | 0.84 |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | |

Table A.6.5.1.6.1-3: Cell specific test parameters for FR1 for CSI-RS in-sync radio link monitoring in non-DRX mode

| Parameter | | Unit | Test 1 | | | | |
|-----------------------------------|---|-----------|-------------------|----|-----|------|----|
| | | | T1 | T2 | T3 | T4 | T5 |
| PDCCH_beta | | dB | 4 | | | | |
| PDCCH_DMRS_beta | | dB | 4 | | | | |
| PBCH_beta | | dB | 0 | | | | |
| PSS_beta | | dB | | | | | |
| SSS_beta | | dB | | | | | |
| PDSCH_beta | | dB | | | | | |
| OCNG_beta | | dB | | | | | |
| SNR on RLM-RS | Config 1 | dB | | | | | |
| | Config 2 | | 1 | -7 | -15 | -4.5 | 1 |
| | Config 3 | | 1 | -7 | -15 | -4.5 | 1 |
| SNR on other channels and signals | Config 1 | dB | 1 | | | | |
| | Config 2 | | 1 | | | | |
| | Config 3 | | 1 | | | | |
| N_{oc} | Config 1 | dBm/15kHz | -98 | | | | |
| | Config 2 | | -98 | | | | |
| | Config 3 | | -98 | | | | |
| Propagation condition | | | TDL-C 300ns 100Hz | | | | |
| Note 1: | OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | |
| Note 2: | The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | | |
| Note 3: | NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | | |
| Note 4: | Measurement gap configuration is assigned to the UE prior to the start of time period T1. | | | | | | |
| Note 5: | The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. | | | | | | |
| Note 6: | The signal contains PDCCH for UEs other than the device under test as part of OCNG. | | | | | | |
| Note 7: | SNR levels correspond to the signal to noise ratio over the SSS REs. | | | | | | |
| Note 8: | The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.6.5.1.6.1-1. | | | | | | |
| Note 9: | The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is [A.3.6]. | | | | | | |

Table A.6.5.1.6.1-4: Void

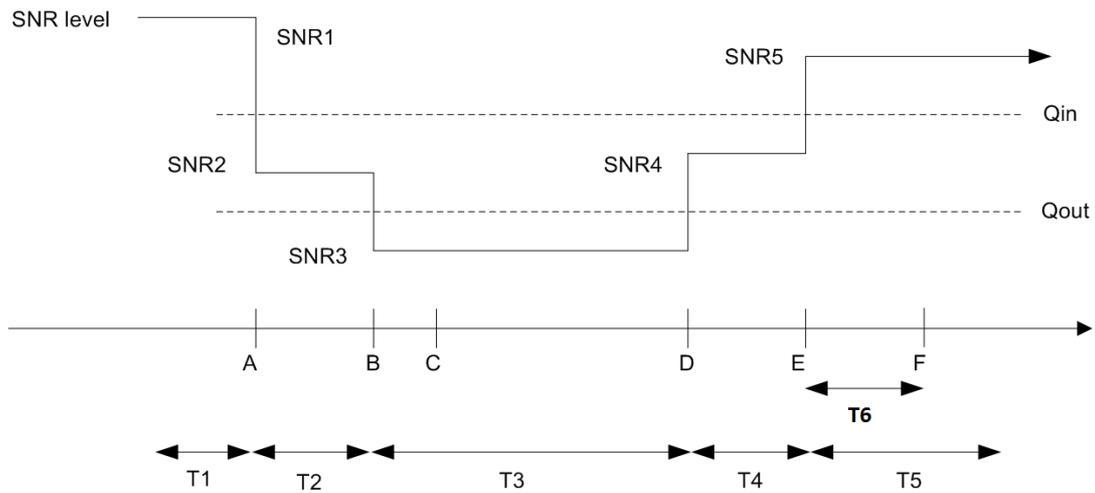


Figure A.6.5.1.6.1-1: SNR variation for CSI-RS in-sync testing

A.6.5.1.6.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.1.7 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode

A.6.5.1.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.6.5.1.7.1-1, A.6.5.1.7.1-2, and A.6.5.1.7.1-3 below. There is one cell, cell 1 is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.6.5.1.7.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test. In the test, SSB0 is configured as the BFD-RS.

Table A.6.5.1.7.1-1: Supported test configurations for FR1 PCell

| Configuration | Description |
|--|---|
| 1 | FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth |
| 2 | TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth |
| 3 | TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth |
| Note: The UE is only required to pass in one of the supported test configurations in FR1 | |

Table A.6.5.1.7.1-2: General test parameters for FR1 PCell for CSI-RS out-of-sync testing in DRX mode

| Parameter | | Unit | Value |
|--|--------------------------------|------|----------------------------|
| | | | Test 1 |
| Active PCell | | | Cell 1 |
| RF Channel Number | | | 1 |
| Duplex mode | Config 1 | | FDD |
| | Config 2, 3 | | TDD |
| TDD Configuration | Config 1 | | Not Applicable |
| | Config 2 | | TDDConf.1.1 |
| | Config 3 | | TDDConf.2.1 |
| DL initial BWP configuration | Config 1, 2, 3 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1, 2, 3 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1, 2, 3 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1, 2, 3 | | ULBWP.1.1 |
| CORESET Reference Channel | Config 1 | | CR.1.1 FDD |
| | Config 2 | | CR.1.1 TDD |
| | Config 3 | | CR.2.1 TDD |
| SSB Configuration | Config 1 | | SSB.1 FR1 |
| | Config 2 | | SSB.1 FR1 |
| | Config 3 | | SSB.2 FR1 |
| SMTc Configuration | Config 1, 2 | | SMTc.1 |
| | Config 3 | | SMTc.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2 | | 15 kHz |
| | Config 3 | | 30 kHz |
| TRS configuration | Config 1 | | TRS.1.1 FDD |
| | Config 2 | | TRS.1.1 TDD |
| | Config 3 | | TRS.1.2 TDD |
| CSI-RS for RLM | Config 1 | | Resource #4 in TRS.1.1 FDD |
| | Config 2 | | Resource #4 in TRS.1.1 TDD |
| | Config 3 | | Resource #4 in TRS.1.2 TDD |
| TCI configuration for PDCCH/PDSCH | | | TCI.State.0 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| Correlation Matrix and Antenna Configuration | | | 2x2 Low |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |

| | | | |
|---|---|----|-----------------|
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| DRX | | | DRX,3 |
| Gap pattern ID | | | N.A. |
| Layer 3 filtering | | | Enabled |
| T310 timer | | ms | 0 |
| T311 timer | | ms | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |
| CSI-RS configuration for CSI reporting | Config 1 | | CSI-RS.1.1 FDD |
| | Config 2 | | CSI-RS.1.1 TDD |
| | Config 3 | | CSI-RS.2.1 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 1.28 |
| T3 | | s | 1.28 |
| D1 | | s | 1.24 |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | |

Table A.6.5.1.7.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in DRX mode

| Parameter | | Unit | Test 1 | | |
|--|----------|-----------|-------------------|----|-----|
| | | | T1 | T2 | T3 |
| PDCCH_beta | | dB | 4 | | |
| PDCCH_DMRS_beta | | dB | 4 | | |
| PBCH_beta | | dB | 0 | | |
| PSS_beta | | dB | | | |
| SSS_beta | | dB | | | |
| PDSCH_beta | | dB | | | |
| OCNG_beta | | dB | | | |
| SNR on RLM-RS | Config 1 | dB | | | |
| | Config 2 | | 1 | -7 | -15 |
| | Config 3 | | 1 | -7 | -15 |
| SNR on other channels and signals | Config 1 | dB | 1 | | |
| | Config 2 | | 1 | | |
| | Config 3 | | 1 | | |
| N_{oc} | Config 1 | dBm/15kHz | -98 | | |
| | Config 2 | | -98 | | |
| | Config 3 | | -98 | | |
| Propagation condition | | | TDL-C 300ns 100Hz | | |
| <p>Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.</p> <p>Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.</p> <p>Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.</p> <p>Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.</p> <p>Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.</p> <p>Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.</p> <p>Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.6.5.1.7.1-1.</p> <p>Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is [A.3.6].</p> | | | | | |

Table A.6.5.1.7.1-4: Void**Table A.6.5.1.7.1-5: Void****Table A.6.5.1.7.1-6: Void**

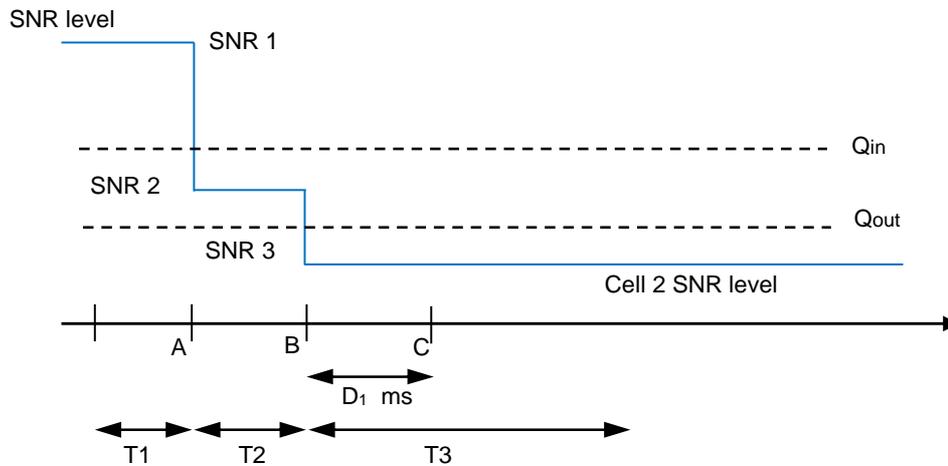


Figure A.6.5.1.7.1-1: SNR variation for CSI-RS out-of-sync testing

A.6.5.1.7.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During time durations T1, T2 and T3, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on PCell.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 (PCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 (PCell) no later than time point C (D_1 ms after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.1.8 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode

A.6.5.1.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.6.5.1.8.1-1, A.6.5.1.8.1-2, A.6.5.1.8.1-3 and A.6.5.1.8.1-3A below. There is one cells, cell 1 which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.1.8.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 is configured as the BFD-RS.

Table A.6.5.1.8.1-1: Supported test configurations for FR1 PSCell

| Configuration | Description |
|--|---|
| 1 | FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth |
| 2 | TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth |
| 3 | TDD duplex mode, 30kHz SSB SCS, 40 MHz bandwidth |
| Note: The UE is only required to pass in one of the supported test configurations in FR1 | |

Table A.6.5.1.8.1-2: General test parameters for FR1 PCell for CSI-RS in-sync testing in non-DRX mode

| Parameter | | Unit | Value |
|--|--------------------------------|------|----------------------------|
| | | | Test 1 |
| Active PCell | | | Cell 1 |
| RF Channel Number | | | 1 |
| Duplex mode | Config 1 | | FDD |
| | Config 2, 3 | | TDD |
| TDD Configuration | Config 1 | | Not Applicable |
| | Config 2 | | TDDConf.1.1 |
| | Config 3 | | TDDConf.2.1 |
| DL initial BWP configuration | Config 1, 2, 3 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1, 2, 3 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1, 2, 3 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1, 2, 3 | | ULBWP.1.1 |
| CORESET Reference Channel | Config 1 | | CR.1.1 FDD |
| | Config 2 | | CR.1.1 TDD |
| | Config 3 | | CR.2.1 TDD |
| SSB Configuration | Config 1 | | SSB.1 FR1 |
| | Config 2 | | SSB.1 FR1 |
| | Config 3 | | SSB.2 FR1 |
| SMTTC Configuration | Config 1, 2 | | SMTTC.1 |
| | Config 3 | | SMTTC.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2 | | 15 kHz |
| | Config 3 | | 30 kHz |
| TRS configuration | Config 1 | | TRS.1.1 FDD |
| | Config 2 | | TRS.1.1 TDD |
| | Config 3 | | TRS.1.2 TDD |
| CSI-RS for RLM | Config 1 | | Resource #4 in TRS.1.1 FDD |
| | Config 2 | | Resource #4 in TRS.1.1 TDD |
| | Config 3 | | Resource #4 in TRS.1.2 TDD |
| TCI configuration for PDCCH/PDSCH | | | TCI.State.0 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| Correlation Matrix and Antenna Configuration | | | 2x2 Low |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |

| | | | |
|---|---|-----|-----------------|
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| In sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 4 |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| DRX | | | DRX.3 |
| Gap pattern ID | | | gp0 |
| Layer 3 filtering | | | Enabled |
| T310 timer | | ms | 2000 |
| T311 timer | | ms | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |
| CSI-RS configuration for CSI reporting | Config 1 | | CSI-RS.1.1 FDD |
| | Config 2 | | CSI-RS.1.1 TDD |
| | Config 3 | | CSI-RS.2.1 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 0.2 |
| T3 | | s | 1.24 |
| T4 | | s | 0.2 |
| T5 | | s | 1.88 |
| T6 | | s | 1.84 |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | |

Table A.6.5.1.8.1-3: Cell specific test parameters for FR1 for CSI-RS in-sync radio link monitoring in non-DRX mode

| Parameter | | Unit | Test 1 | | | | |
|--|----------|-----------|-------------------|----|-----|------|----|
| | | | T1 | T2 | T3 | T4 | T5 |
| PDCCH_beta | | dB | 4 | | | | |
| PDCCH_DMRS_beta | | dB | 4 | | | | |
| PBCH_beta | | dB | 0 | | | | |
| PSS_beta | | dB | | | | | |
| SSS_beta | | dB | | | | | |
| PDSCH_beta | | dB | | | | | |
| OCNG_beta | | dB | | | | | |
| SNR on RLM-RS | Config 1 | dB | | | | | |
| | Config 2 | | 1 | -7 | -15 | -4.5 | 1 |
| | Config 3 | | 1 | -7 | -15 | -4.5 | 1 |
| SNR on other channels and signals | Config 1 | dB | 1 | | | | |
| | Config 2 | | 1 | | | | |
| | Config 3 | | 1 | | | | |
| N_{oc} | Config 1 | dBm/15kHz | -98 | | | | |
| | Config 2 | | -98 | | | | |
| | Config 3 | | -98 | | | | |
| Propagation condition | | | TDL-C 300ns 100Hz | | | | |
| <p>Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.</p> <p>Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.</p> <p>Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.</p> <p>Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.</p> <p>Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.</p> <p>Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.</p> <p>Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.6.5.1.8.1-1.</p> <p>Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is [A.3.6].</p> | | | | | | | |

Table A.6.5.1.8.1-3A: Measurement gap configuration for FR1 CSI-RS in-sync radio link monitoring in non-DRX mode

| Field | Test 1 |
|--------------|--------|
| | Value |
| gapOffset | 0 |
| Note 1: Void | |

Table A.6.5.1.8.1-4: Void

Table A.6.5.1.8.1-5: Void

Table A.6.5.1.8.1-6: Void

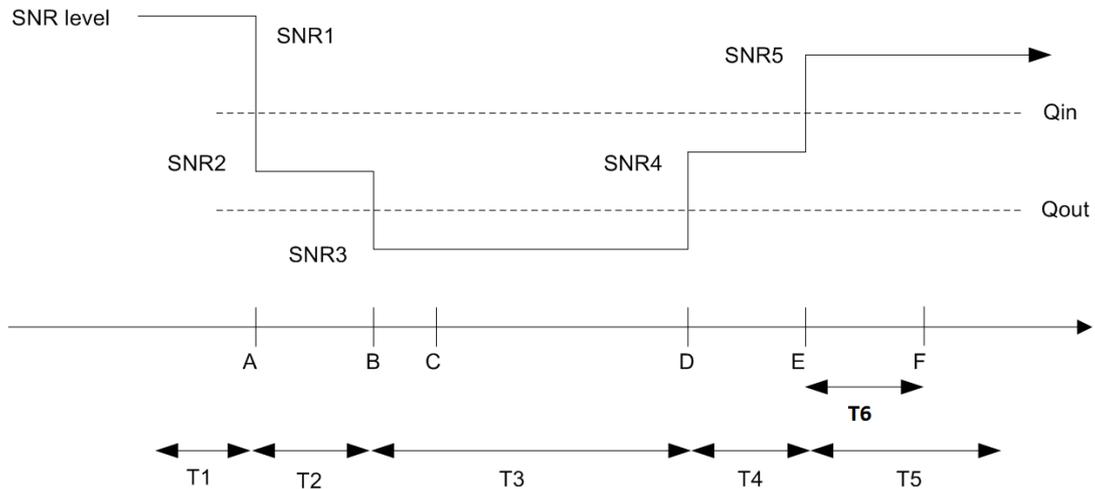


Figure A.6.5.1.8.1-1: SNR variation for CSI-RS in-sync testing

A.6.5.1.8.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.2 Interruption

A.6.5.2.1 Interruptions during measurements on deactivated NR SCC in FR1

A.6.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE missed ACK/NACK rate does not exceed the limits at NR PSCell interruptions during the measurement on the deactivated NR SCC. This test will verify the missed ACK/NACK rate for PCell in standalone NR specified in clause 8.2.2.2. Supported test configurations are shown in table A.6.5.2.1.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.6.5.2.1.1-2 and A 6.5.2.1.1-3 below. In the test there are two cells: Cell1 and Cell2. Cell1 is PCell, Cell2 is an NR deactivated SCell. Cell1 shall be configured as PCell and Cell2 shall be configured as SCell.

The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. The point in time at which the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated NR SCells is received at the UE antenna connector defines the start of time period T1. During T1, PCell is continuously scheduled in DL.

Table A.6.5.2.1.1-1: Interruptions during measurements on deactivated NR SCC supported test configurations

| Config | Description |
|--|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD – FDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD – TDD duplex mode |
| 3 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD – FDD duplex mode |
| 4 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD – TDD duplex mode |
| 5 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD – TDD duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations | |

Table A.6.5.2.1.1-2: General test parameters for interruptions during measurements on deactivated NR SCC in standalone NR

| Parameter | Unit | Value | Comment |
|--|------|--------|--|
| RF Channel Number | | 1, 2 | Two NR RF channels |
| Active PCell | | Cell1 | PCell on NR RF channel number 1. |
| Configured deactivated SCell | | Cell2 | Deactivated SCell on NR RF channel number 2. |
| CP length | | Normal | Applicable to Cell1 and Cell2 |
| DRX | | OFF | |
| Measurement gap pattern Id | | OFF | |
| SCell measurement cycle (measCycleSCell) | ms | 640 | |
| T1 | s | 10 | |

Table A.6.5.2.1.1-3: NR cell specific test parameters for interruptions during measurements on deactivated NR SCC in standalone NR

| Parameter | | Unit | Cell1 | Cell2 |
|-------------------------------------|----------------|------|---------------------------------|---------------------------------|
| Frequency Range | | | FR1 | FR1 |
| Duplex mode | Config 1 | | FDD | FDD |
| | Config 2,5 | | TDD | TDD |
| | Config 3 | | TDD | FDD |
| | Config 4 | | FDD | TDD |
| TDD configuration | Config 1 | | Not Applicable | Not Applicable |
| | Config 2 | | TDDConf.1.1 | TDDConf.1.1 |
| | Config 3 | | TDDConf.1.1 | Not Applicable |
| | Config 4 | | Not Applicable | TDDConf.1.1 |
| | Config 5 | | TDDConf.1.2 | TDDConf.1.2 |
| BW _{channel} | Config 1,2,3,4 | | 10 MHz: N _{RB,c} = 52 | 10 MHz: N _{RB,c} = 52 |
| | Config 5 | | 40 MHz: N _{RB,c} = 106 | 40 MHz: N _{RB,c} = 106 |
| Initial BWP Configuration | | | DLBWP.0.2 ^{Note6} | |
| PDSCH Reference measurement channel | Config 1 | | SR.1.1 FDD | SR.1.1 FDD |
| | Config 2 | | SR.1.1 TDD | SR.1.1 TDD |
| | Config 3 | | SR.1.1 TDD | SR.1.1 FDD |
| | Config 4 | | SR.1.1 FDD | SR.1.1 TDD |
| | Config 5 | | SR.2.1 TDD | SR.2.1 TDD |
| RMSI CORESET parameters | Config 1 | | CR.1.1 FDD | CR.1.1 FDD |
| | Config 2 | | CR.1.1 TDD | CR.1.1 TDD |
| | Config 3 | | CR.1.1 TDD | CR.1.1 FDD |
| | Config 4 | | CR.1.1 FDD | CR.1.1 TDD |
| | Config 5 | | CR.2.1 TDD | CR.2.1 TDD |
| Dedicated CORESET parameters | Config 1 | | CCR.1.1 FDD | CCR.1.1 FDD |
| | Config 2 | | CCR.1.1 TDD | CCR.1.1 TDD |
| | Config 3 | | CCR.1.1 TDD | CCR.1.1 FDD |

| | | Config 4 | | CCR.1.1 FDD | CCR.1.1 TDD |
|---|----------------|--------------|---|-------------|-------------|
| | | Config 5 | | CCR.2.1 TDD | CCR.2.1 TDD |
| OCNG Patterns | | | | OP.1 | OP.1 |
| SMTTC Configuration | | | | SMTTC.1 | SMTTC.1 |
| SSB Configuration | Config 1,2,3,4 | | | SSB.1 FR1 | SSB.1 FR1 |
| | Config 5 | | | SSB.2 FR1 | SSB.2 FR1 |
| Correlation Matrix and Antenna Configuration | | | | 1x2 Low | 1x2 Low |
| EPRE ratio of PSS to SSS | | dB | 0 | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | |
| N_{oc} ^{Note 2} | | dBm/15 kHz | | -104 | -104 |
| SS-RSRP ^{Note 3} | | dBm/15 kHz | | -87 | -87 |
| \hat{E}_s/I_{ot} | | dB | | 17 | 17 |
| \hat{E}_s/N_{oc} | | dB | | 17 | 17 |
| N_{oc} ^{Note 2} | Config 1,2,3,4 | dBm/S | | -104 | -104 |
| | Config 5 | | | -101 | -101 |
| I_o ^{Note3} | Config 1,2,3,4 | dBm/9.36MHz | | -58.96 | -58.96 |
| | Config 5 | dBm/38.16MHz | | -52.86 | -52.86 |
| Time offset to Cell1 ^{Note 5} | | μ s | | - | 3 |
| Propagation Condition | | | | AWGN | AWGN |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: Void</p> <p>Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.</p> <p>Note 6: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2 defined in clause 12 of TS 38.213 [3].</p> | | | | | |

A.6.5.2.1.2 Test Requirements

The UE shall be continuously scheduled on PCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on PCell.

The UE is only allowed to cause interruptions immediately before and immediately after an SMTTC. Each interruption on PCell shall not exceed the value defined in Table A.6.5.2.1.2-1 if the PCell is not in the same band as the deactivated SCell or Table A.6.5.2.1.2-2 if the PCell is in the same band as the deactivated SCell.

Table A.6.5.2.1.2-1: Interruption duration if the PCell is not in the same band as the deactivated SCell

| μ | NR Slot length (ms) | Interruption length |
|-------|---------------------|---------------------|
| 0 | 1 | 1 |
| 1 | 0.5 | 1 |

Table A.6.5.2.1.2-2: Interruption duration if the PCell is in the same band as the deactivated SCell

| μ | NR Slot length (ms) | Interruption length |
|-------|---------------------|---------------------|
| 0 | 1 | 1 + SMTC duration |
| 1 | 0.5 | 1 + SMTC duration |

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.3 SCell Activation and Deactivation Delay

A.6.5.3.1 SCell Activation and deactivation of known SCell in FR1 in non-DRX for 160ms SCell measurement cycle

A.6.5.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SCell activation and deactivation times are within the requirements stated in clause 8.3, when the SCell in FR1 is known by the UE at the time of activation.

The supported test configurations are shown in table A.6.5.3.1.1-1 below. The test parameters are given in Tables A.6.5.3.1.1-2 and cell-specific parameters in A.6.5.3.1.1-3 below. The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are two NR carriers, each with one cell. Both cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1, but is not aware of Cell2. The UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on radio channel 2. The UE now starts monitoring the SCC. The test equipment sends a MAC message for activation of the SCell.

The point in time at which the MAC message is received at the UE antenna connector, in slot # denoted n , defines the start of time period T2. The UE shall be able to report valid CSI in PCell for the activated SCell at latest in slot $n + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, as defined in clause 8.3. The UE shall start reporting CSI in PCell in slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PCell interruption due to activation of SCell shall occur in the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in section 8.2.

Time period T3 starts when a MAC message for deactivation of SCell, sent from the test equipment to the UE in a slot # denoted m , is received at the UE antenna connector. The UE shall carry out deactivation of the SCell in a slot $m + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3, and The starting point of any PCell interruption due to the deactivation shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for SCell is discontinued.

Table A.6.5.3.1.1-1: known FR1 SCell activation in non-DRX for 160ms SCell measurement cycle supported test configurations

| Config | Description |
|--------|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.6.5.3.1.1-2: General test parameters for known FR1 SCell activation case, 160ms SCell measurement cycle

| Parameter | Unit | Value | Comment |
|---|------|---|--|
| RF Channel Number | | 1,2 | Two NR radio channel (1, 2) are used for this test |
| Active PCell | | Cell 1 | Primary cell on NR RF channel number 1. |
| Configured deactivated SCell | | Cell 2 | Configured deactivated secondary cell on NR RF channel number 2 |
| CP length | | Normal | |
| DRX | | OFF | Continuous monitoring of primary cell |
| CQI/PMI periodicity and offset configuration index | | 0 | CQI reporting for SCell every second subframe |
| Cell-individual offset for cells on NR channel number | dB | 0 | Individual offset for cells on primary component carrier. |
| SCell measurement cycle (measCycleSCell) | ms | 160 | |
| Cell2 timing offset to cell1 | μs | 0 | |
| Time alignment error between cell2 and cell1 | μs | ≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1. | The value of time alignment error depends upon the type of carrier aggregation. |
| T1 | s | 7 | During this time the PSCell shall be known and the SCell configured and detected. |
| T2 | s | 1 | During this time the UE shall activate the SCell. |
| T3 | s | 1 | During this time the UE shall deactivate the SCell. |
| T _{HARQ} | ms | k ₁ ×NR slot length | k ₁ is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by <i>dl-DataToUL-ACK</i> , the value of k should be the minimum value defined in TS 38.213 [3] depends on UE's capability |
| T _{CSI_Reporting} | ms | 2 | the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2] |

Table A.6.5.3.1.1-3: Cell specific test parameters for known FR1 SCell activation case, 160ms SCell measurement cycle

| Parameter | Unit | T1 | T2 | T3 |
|-----------|------|----|----|----|
|-----------|------|----|----|----|

| | | | Cell 1 | Cell 2 | Cell 1 | Cell 2 | Cell 1 | Cell 2 |
|--|----------------|-----------|-----------------------------|--------|-------------|--------|-------------|--------|
| Duplex mode | Config 1 | | FDD | | | | | |
| | Config 2,3 | | TDD | | | | | |
| TDD configuration | Config 1 | | Not applicable | | | | | |
| | Config 2 | | TDDConf.1.1 | | | | | |
| | Config 3 | | TDDConf.1.2 | | | | | |
| BW _{channel} | Config 1,2 | MHz | 10: N _{RB,c} = 52 | | | | | |
| | Config 3 | | 40: N _{RB,c} = 106 | | | | | |
| Initial BWP configuration | | | DLBWP.0.2 | | | | | |
| TCI state | | | TCI.State.0 | | | | | |
| TRS Configuration | | | TRS.1.1 TDD | | | | | |
| PDSCH Reference measurement channel | Config 1 | | SR.1.1 FDD | - | SR.1.1 FDD | - | SR.1.1 FDD | - |
| | Config 2 | | SR.1.1 TDD | | SR.1.1 TDD | | SR.1.1 TDD | |
| | Config 3 | | SR2.1 TDD | | SR2.1 TDD | | SR2.1 TDD | |
| Dedicated CORESET parameters | Config 1 | | CCR.1.1 FDD | - | CCR.1.1 FDD | - | CCR.1.1 FDD | - |
| | Config 2 | | CCR.1.1 TDD | | CCR.1.1 TDD | | CCR.1.1 TDD | |
| | Config 3 | | CCR2.1 TDD | | CCR2.1 TDD | | CCR2.1 TDD | |
| RMSI CORESET parameters | Config 1 | | CR.1.1 FDD | - | CR.1.1 FDD | - | CR.1.1 FDD | - |
| | Config 2 | | CR.1.1 TDD | | CR.1.1 TDD | | CR.1.1 TDD | |
| | Config 3 | | CR2.1 TDD | | CR2.1 TDD | | CR2.1 TDD | |
| OCNG Patterns | | | OP.1 | | | | | |
| SSB Configuration | Config 1,2 | | SSB.1 FR1 | | | | | |
| | Config 3 | | SSB.2 FR1 | | | | | |
| SMTC configuration | | | SMTC.1 | | | | | |
| EPRE ratio of PSS to SSS | | dB | 0 | | | | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | | | |
| N _{oc} ^{Note2} | Config 1,2,4,5 | dBm/15kHz | -104 | | | | | |
| | Config 3,6 | | -101 | | | | | |
| \hat{E}_s/I_{ot} | | dB | 17 | | | | | |

| | | | |
|--|----------------|------------|------|
| \hat{E}_s / N_{oc} | | dB | 17 |
| SS-RSRP ^{Note3} | Config 1,2,4,5 | dBm/SCS | -87 |
| | Config 3,6 | | -84 |
| SCH_RP ^{Note 3} | | dBm/15 kHz | -87 |
| Propagation condition | | - | AWGN |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |
| Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | |
| Note 3: SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | |
| Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2. | | | |

A.6.5.3.1.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in a slot $n + 1 + \frac{T_{HARQ} + 3ms}{NR \text{ slot length}}$.

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot $n + \frac{T_{HARQ} + T_{activation_time} + T_{CSI_Reporting}}{NR \text{ slot length}}$, $T_{activation_time} = T_{FirstSSB} + 5ms$, as defined in clause 8.3.

During T3 the UE shall stop sending CSI reports for SCell at latest in a slot $m + \frac{T_{HARQ} + 3ms}{NR \text{ slot length}}$, as defined in clause 8.3.

During T2 interruption of PCell / PSCell during SCell activation shall not happen outside the slot $n + 1 + \frac{T_{HARQ}}{NR \text{ slot length}}$ to $n + 1 + \frac{T_{HARQ} + 3ms + T_X}{NR \text{ slot length}} + N_{interruption}$, as defined in clause 8.3.

During T3 the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{NR \text{ slot length}}$ to $m + 1 + \frac{T_{HARQ} + 3ms}{NR \text{ slot length}}$, as defined in clause 8.3.

The interruption on any activated serving cell shall not be more than the values specified for SA in clause 8.2.2.2.2.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $\frac{T_{HARQ} + T_{activation_time} + T_{CSI_Reporting}}{NR \text{ slot length}}$ as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.6.5.3.2 SCell Activation and deactivation of known SCell in FR1 in non-DRX for 320ms SCell measurement cycle

A.6.5.3.2.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.6.5.3.1.1. The supported test configurations are the same as defined in clause A.6.5.3.1.1. The test parameters are the same except those described in the following clause. The listed parameter values in Tables A.6.5.3.2.1-1 will replace the values of corresponding parameters in Tables A.4.5.3.1.1-1.

Table A.6.5.3.2.1-1: General test parameters for known FR1 SCell activation case, 320ms SCell measurement cycle

| Parameter | Unit | Value | Comment |
|--|------|-------|---------|
| SCell measurement cycle (measCycleSCell) | ms | 320 | |

A.6.5.3.2.2 Test Requirements

The test requirements defined in clause A.6.5.3.1.2 shall apply to this test case, except $T_{\text{activation_time}}$ will be replaced with the value $T_{\text{FirstSSB_MAX}} + T_{\text{rs}} + 5\text{ms}$.

A.6.5.3.3 SCell Activation and deactivation of unknown SCell in FR1 in non-DRX

A.6.5.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the SCell activation and deactivation times are within the requirements stated in clause 8.3, when the SCell in FR1 is unknown by the UE at the time of activation.

The supported test configurations are the same as defined in clause A.6.5.3.1.1. The test parameters are the same except those described in the following clause. The listed parameter values in Tables A.6.5.3.3.1-1 will replace the values of corresponding parameters in Tables A.6.5.3.1.1-1. The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are two NR carriers, each with one cell. Both cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1, but is not aware of Cell2. The UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on radio channel 2. The UE now starts monitoring the SCC. The test equipment sends a MAC message for activation of the SCell.

The point in time at which the MAC message is received at the UE antenna connector, in slot # denoted n , defines the start of time period T2. The UE shall be able to report valid CSI in PCell for the activated SCell at latest in slot $\frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, as defined in clause 8.3. The UE shall start reporting CSI in PCell in slot $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PCell interruption due to activation of SCell shall occur in the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in section 8.2.

Time period T3 starts when a MAC message for deactivation of SCell, sent from the test equipment to the UE in a slot # denoted m , is received at the UE antenna connector. The UE shall carry out deactivation of the SCell in a slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3, and the starting point of any PCell interruption due to the deactivation shall occur in the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for SCell is discontinued.

Table A.6.5.3.1-1: General test parameters for unknown FR1 SCell activation case, 160ms SCell measurement cycle

| Parameter | Unit | Value | Comment |
|-----------|------|-------|---|
| T1 | ms | 100 | During this time the PCell shall be known and the SCell configured, but not detected. |

A.6.5.3.3.2 Test Requirements

The test requirements defined in clause A.6.5.3.1.2 shall apply to this test case, except $T_{\text{activation_time}}$ will be replaced with the value $T_{\text{FirstSSB_MAX}} + T_{\text{SMTC_MAX}} + 2 * T_{\text{RS}} + 5\text{ms}$ as defined in clause 8.3.

A.6.5.4 UE UL carrier RRC reconfiguration Delay

A.6.5.4.1 UE UL carrier RRC reconfiguration Delay

Table A.6.5.4.1-1 - Table A.6.5.4.1-4 : Void

A.6.5.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that when the UE receives a RRC message implying NR UL or Supplementary UL carrier configuration, the UE shall be ready to start transmission on the newly configured carrier within the time limits specified in clause 8.4.2 and 8.4.3 for configuring and deconfiguring, respectively.

There are two cells: FR1 PCell (cell 1) and FR1 SCell (cell 2). Both NR uplink and supplementary uplink are broadcast by *ServingCellConfigCommonSIB*. The test parameters for PCell and SCell are given in Table A.6.5.4.1.1-1, Table A.6.5.4.1.1-2, Table A.6.5.4.1.1-3 and Table A.6.5.4.1.1-4 below. In test 1, the test consists of three time periods, with duration of T1, T2 and T3 respectively. During time duration T1, NR uplink of cell 2 is configured to UE. At the start of T2, a supplementary uplink of cell 2 is configured to UE through *RRCReconfiguration*, then UE shall start transmission both on the NR uplink and supplementary uplink. At the start of T3, the supplementary uplink is released through *RRCReconfiguration*.

In test 2, the test consists of three time periods, with duration of T1, T2 and T3 respectively. During time duration T1, supplementary uplink on cell 2 is configured to UE. At the start of T2, a NR uplink is configured to UE through *RRCReconfiguration*, then UE shall start transmission both on the NR uplink and supplementary uplink. At the start of T3, the NR uplink is released through *RRCReconfiguration*.

Table A.6.5.4.1.1-1: Supported test configurations

| Configuration | PCell (Cell 1) | SCell (Cell 2) |
|---------------|---|---|
| 1 | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | DL and UL: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode; SUL: 15 kHz SCS, 10 MHz bandwidth, SUL duplex mode |
| 2 | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | DL and UL: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode; SUL: 15 kHz SCS, 10 MHz bandwidth, SUL duplex mode |
| 3 | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | DL and UL: 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode; SUL: 30kHz SCS, 40 MHz bandwidth, SUL duplex mode |
| 4 | 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | DL and UL: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode; SUL: 15 kHz SCS, 10 MHz bandwidth, SUL duplex mode |
| 5 | 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | DL and UL: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode; |

| | | |
|--|---|---|
| | | SUL: 15 kHz SCS, 10 MHz bandwidth, SUL duplex mode |
| 6 | 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | DL and UL: 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode; SUL: 30kHz SCS, 40 MHz bandwidth, SUL duplex mode |
| 7 | 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | DL and UL: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode; SUL: 15 kHz SCS, 10 MHz bandwidth, SUL duplex mode |
| 8 | 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | DL and UL: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode; SUL: 15 kHz SCS, 10 MHz bandwidth, SUL duplex mode |
| 9 | 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | DL and UL: 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode; SUL: 30kHz SCS, 40 MHz bandwidth, SUL duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations | | |

Table A.6.5.4.1.1-2: General test parameters for NR standalone UE UL carrier RRC reconfiguration Delay on Pcell

| Parameter | Unit | Test configuration | Value | Comment |
|----------------------------|------|--------------------------------|--|--|
| RF Channel Number | | Config 1,2,3, 4, 5, 6, 7, 8, 9 | 1, 2 | Two radio channels are used for these two tests. |
| Active cell | | Config 1,2,3, 4, 5, 6, 7, 8, 9 | Cell 1: FR1 PCell Cell 2: FR1 SCell | PCell on RF channel number 1 FR1 SCell on RF channel number 2 |
| CP length | | Config 1,2,3, 4, 5, 6, 7, 8, 9 | Normal | |
| DRX | | Config 1,2,3, 4, 5, 6, 7, 8, 9 | OFF | |
| Measurement gap pattern Id | | Config 1,2,3, 4, 5, 6, 7, 8, 9 | OFF | |
| Filter coefficient | | Config 1,2,3, 4, 5, 6, 7, 8, 9 | 0 | L3 filtering is not used |
| T1 | s | Config 1,2,3, 4, 5, 6, 7, 8, 9 | 5 | |
| T2 | s | Config 1,2,3, 4, 5, 6, 7, 8, 9 | 5 | |
| T3 | s | Config 1,2,3, 4, 5, 6, 7, 8, 9 | 5 | |

Table A.6.5.4.1.1-3: NR Cell specific test parameters for NR standalone UE UL carrier RRC reconfiguration Delay on PCell (Cell 1)

| Parameter | Unit | Test Configuration | Test 1 | | | Test 2 | | |
|--|------|--------------------------------|-----------------------------|----|----|-----------------------------|----|----|
| | | | T1 | T2 | T3 | T1 | T2 | T3 |
| Channel number | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | 1 | | | 1 | | |
| TDD configuration | | Conf 1, 2, 3 | N/A | | | N/A | | |
| | | Conf 4, 5, 6 | TDD Conf.1.1 | | | TDD Conf.1.1 | | |
| | | Conf 7, 8, 9 | TDD Conf.2.1 | | | TDD Conf.2.1 | | |
| BW _{channel} | MHz | Conf 1, 2, 3 | 10: N _{RB,c} = 52 | | | 10: N _{RB,c} = 52 | | |
| | | Conf 4, 5, 6 | 10: N _{RB,c} = 52 | | | 10: N _{RB,c} = 52 | | |
| | | Conf 7, 8, 9 | 40: N _{RB,c} = 106 | | | 40: N _{RB,c} = 106 | | |
| PDSCH reference measurement channel as defined in A.3.1.1 | | Conf 1, 2, 3 | SR.1.1 FDD | | | SR.1.1 FDD | | |
| | | Conf 4, 5, 6 | SR.1.1 TDD | | | SR.1.1 TDD | | |
| | | Conf 7, 8, 9 | SR.2.1 TDD | | | SR.2.1 TDD | | |
| RMSI CORESET reference measurement channel as defined in A.3.1.2 | | Conf 1, 2, 3 | CR.1.1 FDD | | | CR.1.1 FDD | | |
| | | Conf 4, 5, 6 | CR.1.1 TDD | | | CR.1.1 TDD | | |
| | | Conf 7, 8, 9 | CR.2.1 TDD | | | CR.2.1 TDD | | |
| RMC CORESET reference measurement channel as defined in A.3.1.3 | | Conf 1, 2, 3 | CCR.1.1 FDD | | | CCR.1.1 FDD | | |
| | | Conf 4, 5, 6 | CCR.1.1 TDD | | | CCR.1.1 TDD | | |
| | | Conf 7, 8, 9 | CCR.2.1 TDD | | | CCR.2.1 TDD | | |
| OCNG Pattern ^{Note 1} | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | OP.1 | | | OP.1 | | |
| SSB configuration | | Conf 1, 2, 3, 4, 5, 6 | SSB.1 FR1 | | | SSB.1 FR1 | | |
| | | Conf 7, 8, 9 | SSB.2 FR1 | | | SSB.2 FR1 | | |
| SMTTC configuration | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | SMTTC.1 | | | SMTTC.1 | | |
| DL initial BWP configuration | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | DLBWP.0.1 | | | DLBWP.0.1 | | |
| DL dedicated BWP configuration | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | DLBWP.1.1 | | | DLBWP.1.1 | | |
| UL dedicated BWP configuration | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | ULBWP.1.1 | | | ULBWP.1.1 | | |
| EPRE ratio of PSS to SSS | dB | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | 0 | | | 0 | | |
| EPRE ratio of PBCH_DMRS to SSS | | | | | | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | | | | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | | | | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | | | | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | | | | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | | | | | | |

| | | | | | | | | |
|--|---------------|--------------------------------|-------|-------|-------|-------|-------|-------|
| EPRE ratio of OCNG DMRS to SSS | | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | | | | | | | |
| N_{oc} ^{Note 2} | dBm / 15kHz | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | -102 | | | -102 | | |
| | dBm/SCS | Conf 1,2,3,4,5,6 | -102 | | | -102 | | |
| | | Conf 7,8,9 | -99 | | | -99 | | |
| \hat{E}_s / N_{oc} | dB | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | 16 | 16 | 16 | 16 | 16 | 16 |
| \hat{E}_s / I_{ot} ^{Note 3} | dB | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | 16 | 16 | 16 | 16 | 16 | 16 |
| SS-RSRP ^{Note 3} | dBm/SCS | Conf 1,2,3,4,5,6 | -86 | -86 | -86 | -86 | -86 | -86 |
| | | Conf 7,8,9 | -83 | -83 | -83 | -83 | -83 | -83 |
| I_o ^{Note 3} | dBm/9.36 MHz | Conf 1,2,3,4,5,6 | -57.9 | -57.9 | -57.9 | -57.9 | -57.9 | -57.9 |
| | dBm/38.16 MHz | Conf 7,8,9 | -51.8 | -51.8 | -51.8 | -51.8 | -51.8 | -51.8 |
| Propagation Condition | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | AWGN | | | AWGN | | |
| Antenna configuration | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | 1 x 2 | | | 1 x 2 | | |
| <p>NOTE 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>NOTE 3: \hat{E}_s / I_{ot}, I_o, and SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | | | |

Table A.6.5.4.1.1-4: NR Cell specific test parameters for NR standalone UE UL carrier RRC reconfiguration Delay on SCell (Cell 2)

| Parameter | Unit | Test Configuration | Test 1 | | | Test 2 | | |
|---|------|--------------------------------|-----------------------------|---------------------------|---------------------------|-----------------------------|---------------------------|---------------------------|
| | | | T1 | T2 | T3 | T1 | T2 | T3 |
| Channel number | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | 2 | | | 2 | | |
| TDD configuration | | Conf 1, 4, 7 | N/A | | | N/A | | |
| | | Conf 2, 5, 8 | TDDConf.1.1 | | | TDDConf.1.1 | | |
| | | Conf 3, 6, 9 | TDDConf.2.1 | | | TDDConf.2.1 | | |
| BW _{channel} | MHz | Conf 1, 4, 7 | 10: N _{RB,c} = 52 | | | 10: N _{RB,c} = 52 | | |
| | | Conf 2, 5, 8 | 10: N _{RB,c} = 52 | | | 10: N _{RB,c} = 52 | | |
| | | Conf 3, 6, 9 | 40: N _{RB,c} = 106 | | | 40: N _{RB,c} = 106 | | |
| PUSCH parameters for NR UL carrier | | Conf 1, 4, 7 | G-FR1-A3-10 in [13] | G-FR1-A3-10 in [13] | G-FR1-A3-10 in [13] | N/A | G-FR1-A3-10 in [13] | N/A |
| | | Conf 2, 5, 8 | G-FR1-A3-10 in [13] | G-FR1-A3-10 in [13] | G-FR1-A3-10 in [13] | N/A | G-FR1-A3-10 in [13] | N/A |
| | | Conf 3, 6, 9 | G-FR1-A3-14 in [13] | G-FR1-A3-14 in [13] | G-FR1-A3-14 in [13] | N/A | G-FR1-A3-14 in [13] | N/A |
| PUCCH parameters For NR UL carrier | | Conf 1, 4, 7 | Table 8.3.3.1.2-1 in [13] | Table 8.3.3.1.2-1 in [13] | Table 8.3.3.1.2-1 in [13] | N/A | N/A | N/A |
| | | Conf 2, 5, 8 | Table 8.3.3.1.2-1 in [13] | Table 8.3.3.1.2-1 in [13] | Table 8.3.3.1.2-1 in [13] | N/A | N/A | N/A |
| | | Conf 3, 6, 9 | Table 8.3.3.1.2-2 in [13] | Table 8.3.3.1.2-2 in [13] | Table 8.3.3.1.2-2 in [13] | N/A | N/A | N/A |
| PUSCH parameters for supplementary UL | | Conf 1, 4, 7 | N/A | G-FR1-A3-10 in [13] | N/A | G-FR1-A3-10 in [13] | G-FR1-A3-10 in [13] | G-FR1-A3-10 in [13] |
| | | Conf 2, 5, 8 | N/A | G-FR1-A3-10 in [13] | N/A | G-FR1-A3-10 in [13] | G-FR1-A3-10 in [13] | G-FR1-A3-10 in [13] |
| | | Conf 3, 6, 9 | N/A | G-FR1-A3-14 in [13] | N/A | G-FR1-A3-14 in [13] | G-FR1-A3-14 in [13] | G-FR1-A3-14 in [13] |
| PUCCH parameters for supplementary UL | | Conf 1, 4, 7 | N/A | N/A | N/A | Table 8.3.3.1.2-1 in [13] | Table 8.3.3.1.2-1 in [13] | Table 8.3.3.1.2-1 in [13] |
| | | Conf 2, 5, 8 | N/A | N/A | N/A | Table 8.3.3.1.2-1 in [13] | Table 8.3.3.1.2-1 in [13] | Table 8.3.3.1.2-1 in [13] |
| | | Conf 3, 6, 9 | N/A | N/A | N/A | Table 8.3.3.1.2-2 in [13] | Table 8.3.3.1.2-2 in [13] | Table 8.3.3.1.2-2 in [13] |
| PDSCH reference measurement channel as defined in A.3.1.1 | | Conf 1, 4, 7 | SR.1.1 FDD | | | SR.1.1 FDD | | |
| | | Conf 2, 5, 8 | SR.1.1 TDD | | | SR.1.1 TDD | | |
| | | Conf 3, 6, 9 | SR.2.1 TDD | | | SR.2.1 TDD | | |
| | | Conf 1, 4, 7 | CR.1.1 FDD | | | CR.1.1 FDD | | |

| | | | | | | | | |
|--|-------------|--------------------------------|-------------|-----|-----|-------------|-----|-----|
| RMSI CORESET reference measurement channel as defined in A.3.1.2 | | Conf 2, 5, 8 | CR.1.1 TDD | | | CR.1.1 TDD | | |
| | | Conf 3, 6, 9 | CR.2.1 TDD | | | CR.2.1 TDD | | |
| RMC CORESET reference measurement channel as defined in A.3.1.3 | | Conf 1, 4, 7 | CCR.1.1 FDD | | | CCR.1.1 FDD | | |
| | | Conf 2, 5, 8 | CCR.1.1 TDD | | | CCR.1.1 TDD | | |
| | | Conf 3, 6, 9 | CCR.2.1 TDD | | | CCR.2.1 TDD | | |
| OCNG Pattern ^{Note 1} | | Conf 1, 2, 3 | OP.1 | | | OP.1 | | |
| SSB configuration | | Conf 1, 2, 4, 5, 7, 8 | SSB.1 FR1 | | | SSB.1 FR1 | | |
| | | Conf 3, 6, 9 | SSB.2 FR1 | | | SSB.2 FR1 | | |
| SMTC configuration | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | SMTC.1 | | | SMTC.1 | | |
| DL initial BWP configuration | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | DLBWP.0.1 | | | DLBWP.0.1 | | |
| DL dedicated BWP configuration | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | DLBWP.1.1 | | | DLBWP.1.1 | | |
| UL dedicated BWP configuration | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | ULBWP.1.1 | | | ULBWP.1.1 | | |
| EPRE ratio of PSS to SSS | dB | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | 0 | | | 0 | | |
| EPRE ratio of PBCH_DMRS to SSS | | | | | | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | | | | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | | | | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | | | | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | | | | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | | | | | | | |
| N_{oc} ^{Note 2} | dBm / 15kHz | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | -102 | | | -102 | | |
| | dBm/SCS | Conf 1, 2, 4, 5, 7, 8 | -102 | | | -102 | | |
| | | Conf 3, 6, 9 | -99 | | | -99 | | |
| \hat{E}_s / N_{oc} | dB | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | 16 | 16 | 16 | 16 | 16 | 16 |
| \hat{E}_s / I_{ot} ^{Note 3} | dB | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | 16 | 16 | 16 | 16 | 16 | 16 |
| SS-RSRP ^{Note 3} | dBm/SCS | Conf 1, 2, 4, 5, 7, 8 | -86 | -86 | -86 | -86 | -86 | -86 |
| | | Conf 3, 6, 9 | -83 | -83 | -83 | -83 | -83 | -83 |

| | | | | | | | | |
|--|----------------------|-----------------------------------|-------|-------|-------|-------|-------|-------|
| I _o ^{Note 3} | dBm/ 9.36 MHz | Conf 1, 2, 4, 5, 7,8 | -57.9 | -57.9 | -57.9 | -57.9 | -57.9 | -57.9 |
| | dBm/ 38.16 MHz | Conf 3, 6, 9 | -51.8 | -51.8 | -51.8 | -51.8 | -51.8 | -51.8 |
| Propagation Condition | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | AWGN | | | AWGN | | |
| Antenna configuration | | Conf 1, 2, 3, 4, 5, 6, 7, 8, 9 | 1 x 2 | | | 1 x 2 | | |
| NOTE 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | | | |
| NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | | | | |
| NOTE 3: \hat{E}_s/I_{ot} , I _o , and SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | | | | |

A.6.5.4.1.2 Test Requirements

In test 1 the UE shall be ready to start transmission on the supplementary uplink carrier on SCell within 20ms from the start of T2.

In test 1 the UE shall stop the transmission on the supplementary uplink carrier on SCell within 20ms from the start of T3.

In test 2 the UE shall be ready to start transmission on the NR uplink carrier on SCell within 20ms from the start of T2.

In test 2 the UE shall stop the transmission on the NR uplink carrier on SCell within 20ms from the start of T3.

All of the above test requirements shall be fulfilled in order for the observed UE UL carrier configuration delay and UE UL carrier release delay to be counted as correct. The rate of correct observed UE UL carrier configuration delay and UE UL carrier release delay during repeated tests shall be at least 90%.

A.6.5.4.2 Void

A.6.5.5 Beam Failure Detection and Link recovery procedures

A.6.5.5.1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode

A.6.5.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.6.5.5.1.1-1, A.6.5.5.1.1-2, A.6.5.5.1.1-3 and A.6.5.5.1.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.5.1.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.6.5.5.1.1-1 additionally shows the variation of the downlink SNR of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of

the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

Table A.6.5.5.1.1-1: Supported test configurations for FR1 PCell

| Configuration | Description |
|---------------|--|
| 1 | FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth |
| 2 | TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth |
| 3 | T TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth |
| Note: | The UE is only required to pass in one of the supported test configurations in FR1 |

Table A.6.5.5.1.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

| Parameter | Unit | Value | Comment |
|--|----------------|--------|-------------------|
| | | Test 1 | |
| Active PSCell | | Cell 1 | |
| RF Channel Number | | 1 | |
| Duplex mode | Config 1 | FDD | |
| | Config 2, 3 | TDD | |
| BWchannel | Config 1 | M Hz | 10: NRB,c = 52 |
| | Config 2 | | 10: NRB,c = 52 |
| | Config 3 | | 40: NRB,c = 106 |
| DL initial BWP configuration | Config 1, 2, 3 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1, 2, 3 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1, 2, 3 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1, 2, 3 | | ULBWP.1.1 |
| TDD Configuration | Config 1 | | Not Applicable |
| | Config 2 | | TDDConf.1.1 |
| | Config 3 | | TDDConf.2.1 |
| CORESET Reference Channel | Config 1 | | CR.1.1 FDD |
| | Config 2 | | CR.1.1 TDD |
| | Config 3 | | CR.2.1 TDD |
| SSB Configuration | Config 1 | | SSB.3 FR1 |
| | Config 2 | | SSB.3 FR1 |
| | Config 3 | | SSB.4 FR1 |
| SMTc Configuration | Config 1, 2 | | SMTc.1 |
| | Config 3 | | SMTc.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2 | | 15 KHz |
| | Config 3 | | 30 KHz |
| PRACH Configuration | Config 1, 2 | | Table A.3.8.2.2-1 |
| | Config 3 | | Table A.3.8.2.2-1 |
| SSB Index assigned as BFD RS (q_0) | | | 0 |

| | | | | |
|--|---|------|-----------------|--|
| SSB Index assigned as CBD RS (q_1) | | | 1 | |
| OCNG parameters | | | OP.1 | |
| CP length | | | Normal | |
| Correlation Matrix and Antenna Configuration | | | 2x2 Low | |
| Beam failure detection transmission parameters | DCI format | | 1-0 | |
| | Number of Control OFDM symbols | | 2 | |
| | Aggregation level | CC E | 8 | |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 | |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 | |
| | DMRS precoder granularity | | REG bundle size | |
| | REG bundle size | | 6 | |
| DRX | | | OFF | |
| Gap pattern ID | | | gp0 | |
| rimInSyncOutOfSyncThreshold | | | absent | When the field is absent, the UE applies the value 0. (Table 8.1.1-1). |
| rsrp-ThresholdSSB | | dBm | -98 | Threshold used for $Q_{in_LR_SSB}$ |
| powerControlOffsetSS | | | db0 | Used for deriving rsrp-ThresholdCSI-RS |
| beamFailureInstanceMaxCount | | | n1 | see clause 5.17 of TS 38.321 [7] |
| beamFailureDetectionTimer | | | pbfd4 | see clause 5.17 of TS 38.321 [7] |
| CSI-RS configuration for CSI reporting | Config 1 | | CSI-RS.1.1 FDD | |
| | Config 2 | | CSI-RS.1.1 TDD | |
| | Config 3 | | CSI-RS.2.1 TDD | |
| CSI-RS for tracking | Config 1 | | TRS.1.1 FDD | |
| | Config 2 | | TRS.1.1 TDD | |
| | Config 3 | | TRS.1.2 TDD | |
| SSB Index assigned as RLM RS | | 0, 1 | | |
| T310 Timer | ms | 1000 | | |
| N310 | | 2 | | |

| | | | |
|---|---|------|---|
| T1 | s | 0.2 | During this time the the UE shall be fully synchronized to cell 1 |
| T2 | s | 0.37 | |
| T3 | s | 0.24 | |
| T4 | s | 0 | |
| T5 | s | 0.17 | |
| D1 | s | 0.13 | |
| Note 1: All configurations are assigned to the UE prior to the start of time period T1. | | | |
| Note 2: UE-specific PDCCH is not transmitted after T1 starts. | | | |

Table A.6.5.5.1.1-3: Cell specific test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

| Parameter | Unit | Test 1 | | | | |
|--|---|-------------------|-----|-----|-----|-----|
| | | T1 | T2 | T3 | T4 | T5 |
| EPRE ratio of PDCCH DMRS to SSS | dB | 0 | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PSS to SSS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | | | | | |
| SNR _{SSB} of set q ₀ | Config 1 | 5 | -3 | -12 | -12 | -12 |
| | Config 2 | 5 | -3 | -12 | -12 | -12 |
| | Config 3 | 5 | -3 | -12 | -12 | -12 |
| SNR _{SSB} of set q ₁ | Config 1 | -12 | -12 | 5 | 5 | 5 |
| | Config 2 | -12 | -12 | 5 | 5 | 5 |
| | Config 3 | -12 | -12 | 5 | 5 | 5 |
| N_{oc} | Config 1 | dBm/15 | | | | |
| | Config 2 | KHz | | | | |
| | Config 3 | -98 | | | | |
| Propagation condition | | TDL-C 300ns 100Hz | | | | |
| Note 1: | OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | |
| Note 2: | The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | |
| Note 3: | NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | |
| Note 4: | Measurement gap configuration is assigned to the UE prior to the start of time period T1. | | | | | |
| Note 5: | The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. | | | | | |
| Note 6: | The signal contains PDCCH for UEs other than the device under test as part of OCNG. | | | | | |
| Note 7: | SNR levels correspond to the signal to noise ratio over the SSS REs. | | | | | |
| Note 8: | The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1. | | | | | |
| Note 9: | The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6. | | | | | |

Table A.6.5.5.1.1-4: Void

| Field | Test 1 |
|-----------|--------|
| | Value |
| gapOffset | 0 |

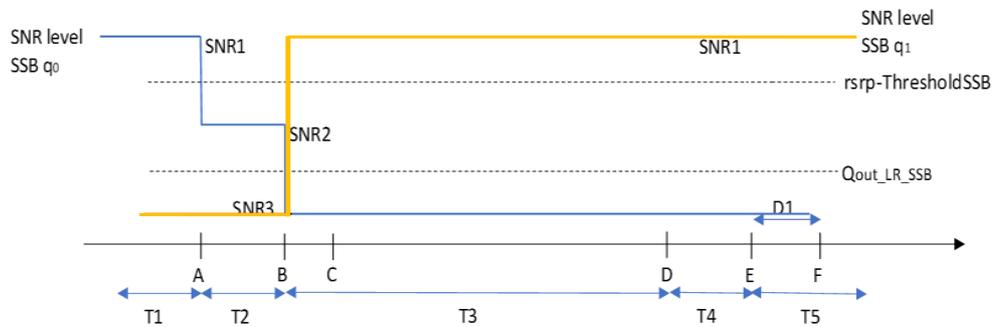


Figure A.6.5.5.1.1-1: SNR variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.6.5.5.1.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 120+10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.5.2 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode

A.6.5.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.6.5.5.2.1-1, A.6.5.5.2.1-2, A.6.5.5.2.1-3, A.6.5.5.2.1-4 and A.6.5.5.2.1-5 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.5.2.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.6.5.5.2.1-1 additionally shows the variation of the downlink SNR of the SSB in set q_1 of the candidate beam used for link recovery. Prior to

the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.6.5.5.2.1-1: Supported test configurations for FR1 PCell

| Configuration | Description |
|---------------|--|
| 1 | FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth |
| 2 | TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth |
| 3 | TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth |
| Note: | The UE is only required to pass in one of the supported test configurations in FR1 |

Table A.6.5.5.2.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

| Parameter | Unit | Value | Comment |
|--------------------------------|----------------|--------|-----------------|
| | | | |
| Active PCell | | Cell 1 | |
| RF Channel Number | | 1 | |
| Duplex mode | Config 1 | FDD | |
| | Config 2, 3 | TDD | |
| BWchannel | Config 1 | MHz | 10: NRB,c = 52 |
| | Config 2 | | 10: NRB,c = 52 |
| | Config 3 | | 40: NRB,c = 106 |
| DL initial BWP configuration | Config 1, 2, 3 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1, 2, 3 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1, 2, 3 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1, 2, 3 | | ULBWP.1.1 |
| TDD Configuration | Config 1 | | Not Applicable |
| | Config 2 | | TDDConf.1.1 |
| | Config 3 | | TDDConf.2.1 |
| CORESET Reference Channel | Config 1 | | CR.1.1 FDD |
| | Config 2 | | CR.1.1 TDD |
| | Config 3 | | CR.2.1 TDD |
| SSB Configuration | Config 1 | | SSB.3 FR1 |
| | Config 2 | | SSB.3 FR1 |
| | Config 3 | | SSB.4 FR1 |
| SMTTC Configuration | Config 1, 2 | | SMTTC.1 |
| | Config 3 | | SMTTC.1 |

| | | | | |
|--|---|------|-------------------|--|
| PDSCH/PDCCH subcarrier spacing | Config 1, 2 | | 15 KHz | |
| | Config 3 | | 30 KHz | |
| PRACH Configuration | Config 1, 2 | | Table A.3.8.2.2-1 | |
| | Config 3 | | Table A.3.8.2.2-1 | |
| SSB Index assigned as BFD RS (q_0) | | | 0 | |
| SSB Index assigned as CBD RS (q_1) | | | 1 | |
| OCNG parameters | | | OP.1 | |
| CP length | | | Normal | |
| Correlation Matrix and Antenna Configuration | | | 2x2 Low | |
| Beam failure detection transmission parameters | DCI format | | 1-0 | |
| | Number of Control OFDM symbols | | 2 | |
| | Aggregation level | CC E | 8 | |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 | |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 | |
| | DMRS precoder granularity | | REG bundle size | |
| | REG bundle size | | 6 | |
| DRX | | | DRX.7 | A.3.3.7 |
| Gap pattern ID | | | N.A. | |
| rimInSyncOutOfSyncThreshold | | | Absent | When the field is absent, the UE applies the value 0. (Table 8.1.1-1). |
| rsrp-ThresholdSSB | | dBm | -98 | Threshold used for $Q_{in_LR_SSB}$ |
| powerControlOffsetSS | | | db0 | Used for deriving rsrp-ThresholdCSI-RS |
| beamFailureInstanceMaxCount | | | n1 | see clause 5.17 of TS 38.321 [7] |

| | | | | |
|---|-------------|------|----------------|---|
| beamFailureDetectionTimer | | | pbfd4 | see clause 5.17 of TS 38.321 [7] |
| CSI-RS configuration for CSI reporting | Config 1, 4 | | CSI-RS.1.1 FDD | |
| | Config 2, 5 | | CSI-RS.1.1 TDD | |
| | Config 3, 6 | | CSI-RS.2.1 TDD | |
| CSI-RS for tracking | Config 1, 4 | | TRS.1.1 FDD | |
| | Config 2, 5 | | TRS.1.1 TDD | |
| | Config 3, 6 | | TRS.1.2 TDD | |
| SSB Index assigned as RLM RS | | 0, 1 | | |
| T310 Timer | ms | 1000 | | |
| N310 | | 2 | | |
| T1 | | s | 1 | During this time the the UE shall be fully synchronized to cell 1 |
| T2 | | s | 5.17 | |
| T3 | | s | 3.24 | |
| T4 | | s | 0 | |
| T5 | | s | 1.97 | |
| D1 | | s | 1.93 | |
| Note 1: All configurations are assigned to the UE prior to the start of time period T1. | | | | |
| Note 2: UE-specific PDCCH is not transmitted after T1 starts. | | | | |

Table A.6.5.5.2.1-3: Cell specific test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

| Parameter | Unit | Test 1 | | | | |
|-----------------------------------|----------|--------|-----|-----|-----|-----|
| | | T1 | T2 | T3 | T4 | T5 |
| EPRE ratio of PDCCH DMRS to SSS | dB | 0 | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PSS to SSS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | | | | | |
| SNR_SSB of set q ₀ | Config 1 | 5 | -3 | -12 | -12 | -12 |
| | Config 2 | 5 | -3 | -12 | -12 | -12 |
| | Config 3 | 5 | -3 | -12 | -12 | -12 |
| SNR_SSB of set q ₁ | Config 1 | -12 | -12 | 5 | 5 | 5 |
| | Config 2 | -12 | -12 | 5 | 5 | 5 |

| | | | | | | | |
|-----------------------|---|---------------|-------------------|-----|---|---|---|
| N_{oc} | Config 3 | dBm/15 KHz | -12 | -12 | 5 | 5 | 5 |
| | Config 1 | | -98 | | | | |
| | Config 2 | | -98 | | | | |
| | Config 3 | | -98 | | | | |
| Propagation condition | | | TDL-C 300ns 100Hz | | | | |
| Note 1: | OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | |
| Note 2: | The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | | |
| Note 3: | NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | | |
| Note 4: | Void | | | | | | |
| Note 5: | The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. | | | | | | |
| Note 6: | The signal contains PDCCH for UEs other than the device under test as part of OCNG. | | | | | | |
| Note 7: | SNR levels correspond to the signal to noise ratio over the SSS REs. | | | | | | |
| Note 8: | The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1. | | | | | | |
| Note 9: | The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6. | | | | | | |

Table A.6.5.5.2.1-4: Void

Table A.6.5.5.2.1-5: Void

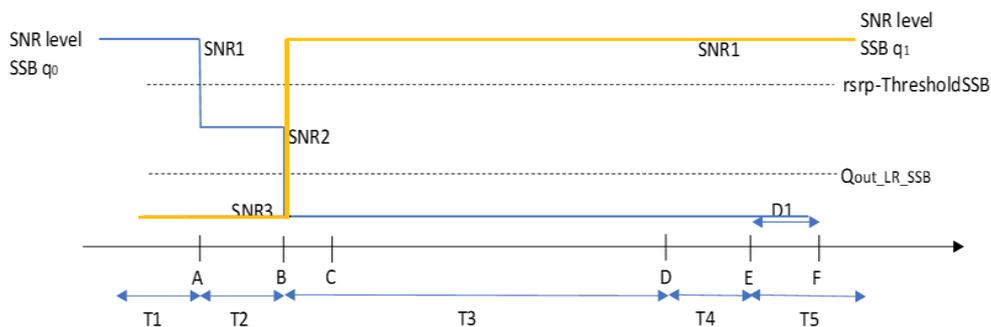


Figure A.6.5.5.2.1-1: SNR variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.6.5.5.2.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 1920 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.5.3 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in non-DRX mode

A.6.5.5.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.6.5.5.3.1-1, A.6.5.5.3.1-2, and below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.5.3.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.6.5.5.3.1-1 additionally shows the variation of the downlink SNR of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. In the test, DRX configuration is not enabled.

Table A.6.5.5.3.1-1: Supported test configurations for FR1 PCell

| Configuration | Description |
|---------------|--|
| 1 | FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth |
| 2 | TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth |
| 3 | TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth |
| Note: | The UE is only required to pass in one of the supported test configurations in FR1 |

Table A.6.5.5.3.1-2: General test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

| Parameter | | Unit | Value Test 1 | Comment |
|---|-------------|------|-----------------|---------|
| Active PCell | | | Cell 1 | |
| RF Channel Number | | | 1 | |
| Duplex mode | Config 1 | | FDD | |
| | Config 2, 3 | | TDD | |
| TDD Configuration | Config 1 | | Not Applicable | |
| | Config 2 | | TDDConf.1.1 | |
| | Config 3 | | TDDConf.2.1 | |
| CORESET Reference Channel | Config 1 | | CR.1.1 FDD | A.3.1.2 |
| | Config 2 | | CR.1.1 TDD | |
| | Config 3 | | CR.2.1 TDD | |
| SSB Configuration | Config 1 | | SSB.1 FR1 | A.3.10 |
| | Config 2 | | SSB.1 FR1 | |
| | Config 3 | | SSB.2 FR1 | |
| SMTC Configuration | Config 1, 2 | | SMTC.1 | A.3.11 |
| | Config 3 | | SMTC.1 | |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2 | | 15 KHz | |
| | Config 3 | | 30 KHz | |
| csi-RS-Index assigned as beam failure detection RS in set q_0 | | | 0 | |

| | | | | |
|---|---|-----|-----------------|--|
| OCNG parameters | | | OP.1 | A.3.2.1 |
| CP length | | | Normal | |
| Correlation Matrix and Antenna Configuration | | | 2x2 Low | |
| Beam failure detection transmission parameters | DCI format | | 1-0 | |
| | Number of Control OFDM symbols | | 2 | |
| | Aggregation level | CCE | 8 | |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 | |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 | |
| | DMRS precoder granularity | | REG bundle size | |
| | REG bundle size | | 6 | |
| DRX | | | OFF | |
| Gap pattern ID | | | N.A. | |
| csi-RS-Index assigned as candidate beam detection RS in set q_1 | | | 1 | N |
| rInSyncOutOfSyncThreshold | | | absent | When the field is absent, the UE applies the value 0. (Table 8.1.1-1). |
| rsrp-ThresholdSSB | dBm | | -98 | Threshold used for $Q_{in_LR_SSB}$ |
| powerControlOffsetSS | | | db0 | Used for deriving rsrp-ThresholdCSI-RS |
| beamFailureInstanceMaxCount | | | n1 | see clause 5.17 of TS 38.321 [7] |
| beamFailureDetectionTimer | | | pbfd4 | see clause 5.17 of TS 38.321 [7] |
| CSI-RS configuration for q_0 and q_1 | Config 1 | | CSI-RS.1.2 FDD | A.3.14 |
| | Config 2 | | CSI-RS.1.2 TDD | |
| | Config 3 | | CSI-RS.2.2 TDD | |
| CSI-RS configuration for CSI reporting | Config 1 | | CSI-RS.1.1 FDD | A.3.14 |
| | Config 2 | | CSI-RS.1.1 TDD | |
| | Config 3 | | CSI-RS.2.1 TDD | |
| TRS configuration | Config 1 | | TRS.1.1 FDD | |
| | Config 2 | | TRS.1.1 TDD | |
| | Config 3 | | TRS.1.2 TDD | |
| CSI-RS-Index assigned as RLM RS | Config 1 | | CSI-RS.1.2 FDD | A.3.14 |
| | Config 2 | | CSI-RS.1.2 TDD | |
| | Config 3 | | CSI-RS.2.2 TDD | |
| T310 Timer | | ms | 1000 | |
| N310 | | | 2 | |
| T1 | | s | 0.2 | During this time the the UE shall be fully synchronized to cell 1 |
| T2 | | s | 0.18 | |
| T3 | | s | 0.14 | |
| T4 | | s | 0 | |
| T5 | | s | 0.08 | |
| D1 | | s | 0.04 | |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | | |




Table A.6.5.5.3.1-3: Cell specific test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

| Parameter | | Unit | Test 1 | | | | |
|-----------------------------------|----------|---------------|--------|-----|-----|-----|-----|
| | | | T1 | T2 | T3 | T4 | T5 |
| EPRE ratio of PDCCH DMRS to SSS | | dB | 0 | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | |
| EPRE ratio of PSS to SSS | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | | | | | | |
| SNR_CSI-RS of set q_0 | Config 1 | dB | 5 | -3 | -12 | -12 | -12 |
| | Config 2 | | 5 | -3 | -12 | -12 | -12 |
| | Config 3 | | 5 | -3 | -12 | -12 | -12 |
| SNR_CSI-RS of set q_1 | Config 1 | dB | -12 | -12 | 5 | 5 | 5 |
| | Config 2 | | -12 | -12 | 5 | 5 | 5 |
| | Config 3 | | -12 | -12 | 5 | 5 | 5 |
| N_{oc} | Config 1 | dBm/15 KHz | -98 | | | | |
| | Config 2 | | -98 | | | | |
| | Config 3 | | -98 | | | | |

| Propagation condition | TDL-C 300ns 100Hz |
|-----------------------|---|
| Note 1: | OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
| Note 2: | The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. |
| Note 3: | NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. |
| Note 4: | Void |
| Note 5: | The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. |
| Note 6: | The signal contains PDCCH for UEs other than the device under test as part of OCNG. |
| Note 7: | SNR levels correspond to the signal to noise ratio over the SSS REs. |
| Note 8: | The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1. |
| Note 9: | The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6. |

Table A.6.5.5.3.1-4: Void

Table A.6.5.5.3.1-5: Void

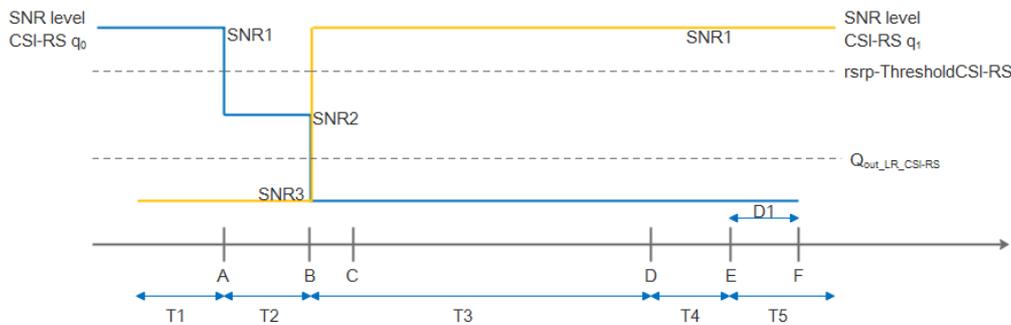


Figure A.6.5.5.3.1-1: SNR variation for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

A.6.5.5.3.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 30+10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.5.4 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode

A.6.5.5.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.6.5.5.4.1-1, A.6.5.5.4.1-2, A.6.5.5.4.1-3, and A.6.5.5.4.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.5.4.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.6.5.5.4.1-1 additionally shows the variation of the downlink SNR of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.6.5.5.4.1-1: Supported test configurations for FR1 PCell

| Configuration | Description |
|---------------|--|
| 1 | FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth |
| 2 | TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth |
| 3 | TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth |
| Note: | The UE is only required to pass in one of the supported test configurations in FR1 |

Table A.6.5.5.4.1-2: General test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

| Parameter | Unit | Value | Comment |
|---|-------------|----------------|---------|
| | | Test 1 | |
| Active PCell | | Cell 1 | |
| RF Channel Number | | 1 | |
| Duplex mode | Config 1 | FDD | |
| | Config 2, 3 | TDD | |
| TDD Configuration | Config 1 | Not Applicable | |
| | Config 2 | TDDConf.1.1 | |
| | Config 3 | TDDConf..21 | |
| CORESET Reference Channel | Config 1 | CR.1.1 FDD | A.3.1.2 |
| | Config 2 | CR.1.1 TDD | |
| | Config 3 | CR.2.1 TDD | |
| SSB Configuration | Config 1 | SSB.1 FR1 | A.3.10 |
| | Config 2 | SSB.1 FR1 | |
| | Config 3 | SSB.2 FR1 | |
| SMTTC Configuration | Config 1, 2 | SMTTC.1 | A.3.11 |
| | Config 3 | SMTTC.1 | |
| PDSCH/PDCC H subcarrier spacing | Config 1, 2 | 15 KHz | |
| | Config 3 | 30 KHz | |
| csi-RS-Index assigned as beam failure detection RS in set q_0 | | 0 | |

| | | | | |
|---|---|-----|-----------------|--|
| OCNG parameters | | | OP.1 | A.3.2.1 |
| CP length | | | Normal | |
| Correlation Matrix and Antenna Configuration | | | 2x2 Low | |
| Beam failure detection transmission parameters | DCI format | | 1-0 | |
| | Number of Control OFDM symbols | | 2 | |
| | Aggregation level | CCE | 8 | |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 | |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 | |
| | DMRS precoder granularity | | REG bundle size | |
| | REG bundle size | | 6 | |
| DRX | | | DRX.7 | A.3.3.7 |
| Gap pattern ID | | | N.A. | |
| csi-RS-Index assigned as candidate beam detection RS in set q_1 | | | 1 | |
| rlmInSyncOutOfSyncThreshold | | | absent | When the field is absent, the UE applies the value 0. (Table 8.1.1-1). |
| rsrp-ThresholdSSB | dBm | | -98 | Threshold used for $Q_{in_LR_SSB}$ |
| powerControlOffsetSS | | | db0 | Used for deriving rsrp-ThresholdCSI-RS |
| beamFailureInstanceMaxCount | | | n1 | see clause 5.17 of TS 38.321 [7] |
| beamFailureDetectionTimer | | | pbfd4 | see clause 5.17 of TS 38.321 [7] |
| CSI-RS configuration for q_0 and q_1 | Config 1 | | CSI-RS.1.2 FDD | A.3.14.1 |
| | Config 2 | | CSI-RS.1.2 TDD | |
| | Config 3 | | CSI-RS.2.2 TDD | |
| CSI-RS configuration for CSI reporting | Config 1 | | CSI-RS.1.1 FDD | A.3.14.1 |
| | Config 2 | | CSI-RS.1.1 TDD | |
| | Config 3 | | CSI-RS.2.1 TDD | |
| TRS configuration | Config 1 | | TRS.1.1 FDD | |
| | Config 2 | | TRS.1.1 TDD | |
| | Config 3 | | TRS.1.2 TDD | |
| CSI-RS-Index assigned as RLM RS | Config 1 | | CSI-RS.1.2 FDD | |
| | Config 2 | | CSI-RS.1.2 TDD | |
| | Config 3 | | CSI-RS.2.2 TDD | |
| T310 Timer | | ms | 1000 | |
| N310 | | | 2 | |
| T1 | | s | 1 | During this time the the UE shall be fully synchronized to cell 1 |
| T2 | | s | 8.37 | |
| T3 | | s | 6.44 | |
| T4 | | s | 0 | |
| T5 | | s | 1.97 | |
| D1 | | s | 1.93 | |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | | |

Table A.6.5.5.4.1-3: Cell specific test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

| Parameter | Unit | Test 1 | | | | |
|-----------------------------------|---|-------------------|-----|-----|-----|-----|
| | | T1 | T2 | T3 | T4 | T5 |
| EPRE ratio of PDCCH DMRS to SSS | dB | 0 | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | dB | | | | | |
| EPRE ratio of PBCH DMRS to SSS | dB | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | dB | | | | | |
| EPRE ratio of PSS to SSS | dB | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | dB | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | dB | | | | | |
| EPRE ratio of OCNG DMRS to SSS | dB | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | dB | | | | | |
| SNR_CSI-RS of set q_0 | Config 1 | 5 | -3 | -12 | -12 | -12 |
| | Config 2 | 5 | -3 | -12 | -12 | -12 |
| | Config 3 | 5 | -3 | -12 | -12 | -12 |
| SNR_CSI-RS of set q_1 | Config 1 | -12 | -12 | 5 | 5 | 5 |
| | Config 2 | -12 | -12 | 5 | 5 | 5 |
| | Config 3 | -12 | -12 | 5 | 5 | 5 |
| N_{oc} | Config 1 | -98 | | | | |
| | Config 2 | -98 | | | | |
| | Config 3 | -98 | | | | |
| Propagation condition | | TDL-C 300ns 100Hz | | | | |
| Note 1: | OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | |
| Note 2: | The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | |
| Note 3: | NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | |
| Note 4: | Void | | | | | |
| Note 5: | The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. | | | | | |
| Note 6: | The signal contains PDCCH for UEs other than the device under test as part of OCNG. | | | | | |
| Note 7: | SNR levels correspond to the signal to noise ratio over the SSS REs. | | | | | |
| Note 8: | The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1. | | | | | |
| Note 9: | The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6. | | | | | |

Table A.6.5.5.4.1-4: Void**Table A.6.5.5.4.1-5: Void****Table A.6.5.5.4.1-6: Void**

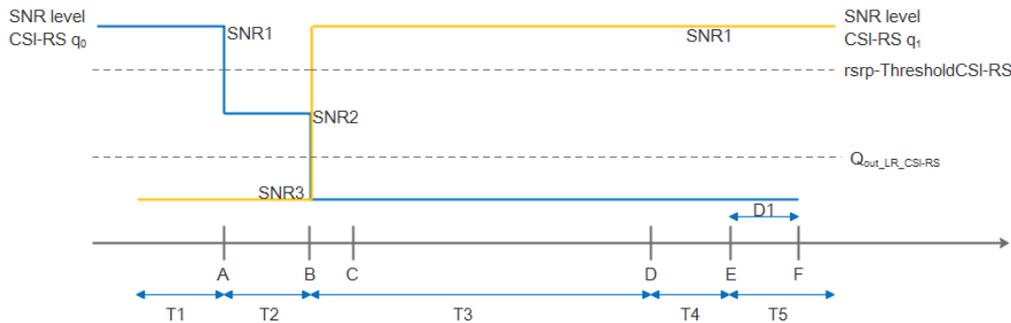


Figure A.6.5.4.1-1: SNR variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

A.6.5.5.4.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 1920 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.6 Active BWP switch

A.6.5.6.1 DCI-based and Timer-based Active BWP Switch

A.6.5.6.1.1 NR FR1- NR FR1 DL active BWP switch of PCell with non-DRX in SA

A.6.5.6.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6, and interruption requirement on other active serving cell defined in clause 8.2.2.2.5.

The supported test configurations are shown in Table A.6.5.6.1.1.1-1 below. The test scenario comprises of one NR PCell (Cell 1) and one NR SCell (Cell 2) as given in Table A.6.5.6.1.1.1-2. NR Cell-specific parameters is specified in Table A.6.5.6.1.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 1 and the time duration of T2.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 2) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (SCell) on radio channel 2 (SCC).

- UE is configured with 2 different UE-specific downlink bandwidth parts for PCell, BWP-1 and BWP-2, in Cell 1 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PCell.
- UE is configured with a *bwp-InactivityTimer* timer value for PCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for PCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted i . The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH no later than the beginning of the DL slot right after PCell's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PCell no later than the beginning of the DL slot right after slot ($i+T_{BWPswitchDelay}+kI$). The UE shall be continuously scheduled on PCell's BWP-2 no later than the beginning of the DL slot right after slot ($i+T_{BWPswitchDelay}$).

The starting time of SCell (Cell 2) interruption due to BWP switch on PCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on PCell(Cell 1).

During T3,

The time period T3 starts from the slot # j , where j is the beginning slot of the DL subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH no later than the beginning of the DL slot right after PCell's slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell at latest at the beginning of the DL slot right after slot ($j+T_{BWPswitchDelay}+kI$). The UE shall be continuously scheduled on SCell's BWP-1 no later than the beginning of the DL slot right after slot ($j+T_{BWPswitchDelay}$).

The starting time of SCell (Cell 2) interruption due to BWP switch of PCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in PCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

The test equipment verifies that potential interruption to SCell is carried out in the correct time span by monitoring ACK/NACK sent in SCell during BWP switch of PCell, respectively.

Table A.6.5.6.1.1-1: DL BWP switch supported test configurations

| Config | Description |
|--|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD -FDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD – TDD duplex mode |
| 3 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD – FDD duplex mode |
| 4 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD – TDD duplex mode |
| 5 | NR 30kHz SSB SCS, 40 MHz bandwidth, TDD - TDD duplex mode |
| Note 1: The UE is only required to be tested in one of the supported test configurations | |

Table A.6.5.6.1.1-2: General test parameters for DL BWP switch in SA

| Parameter | Unit | Value | Comment |
|---|------|--------|---|
| NR RF Channel Number | | 1, 2 | Two NR radio channels are used for this test |
| Active PCell | | Cell 1 | PCell on RF channel number 1. |
| Active SCell | | Cell 2 | SCell on RF channel number 2. |
| CP length | | Normal | |
| DRX | | OFF | For both PCell and SCell |
| <i>bwp-InactivityTimer</i> | ms | [200 | |
| Cell-individual offset for cells on RF channel number 1 | dB | 0 | Individual offset for cells on PCC. |
| Cell-individual offset for cells on RF channel number 2 | dB | 0 | Individual offset for cells on SCC. |
| Cell2 timing offset to cell1 | µs | 3 | Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1. |
| T1 | s | 0.2 | |
| T2 | s | 0.2 | |
| T3 | s | 0.2 | |

Table A6.5.6.1.1-3: NR Cell specific test parameters for DL BWP switch in SA

| Parameter | | Unit | Cell 1 | Cell2 |
|-------------------------------------|----------------|------|---------------------------------|---------------------------------|
| Frequency Range | | | FR1 | FR1 |
| Duplex mode | Config 1 | | FDD | FDD |
| | Config 2,5 | | TDD | TDD |
| | Config 3 | | TDD | FDD |
| | Config 4 | | FDD | TDD |
| TDD configuration | Config 1 | | Not Applicable | Not Applicable |
| | Config 2 | | TDDConf.1.1 | TDDConf.1.1 |
| | Config 3 | | TDDConf.1.1 | Not Applicable |
| | Config 4 | | Not Applicable | TDDConf.1.1 |
| | Config 5 | | TDDConf.1.2 | TDDConf.1.2 |
| BW _{channel} | Config 1,2,3,4 | | 10 MHz: N _{RB,c} = 52 | 10 MHz: N _{RB,c} = 52 |
| | Config 5 | | 40 MHz: N _{RB,c} = 106 | 40 MHz: N _{RB,c} = 106 |
| Active BWP ID | | | 1, 2 | 3 |
| Initial BWP Configuration | | | DLBWP.0.2 ^{Note4} | |
| Active BWP-1 Configuration | | | DLBWP.1.1 ^{Note4} | - |
| Active BWP-2 Configuration | | | DLBWP.1.3 ^{Note4} | - |
| PDSCH Reference measurement channel | Config 1 | | SR.1.1 FDD | SR.1.1 FDD |
| | Config 2 | | SR.1.1 TDD | SR.1.1 TDD |
| | Config 3 | | SR.1.1 TDD | SR.1.1 FDD |
| | Config 4 | | SR.1.1 FDD | SR.1.1 TDD |
| | Config 5 | | SR.2.1 TDD | SR.2.1 TDD |
| RMSI CORESET parameters | Config 1 | | CR.1.1 FDD | CR.1.1 FDD |
| | Config 2 | | CR.1.1 TDD | CR.1.1 TDD |
| | Config 3 | | CR.1.1 TDD | CR.1.1 FDD |
| | Config 4 | | CR.1.1 FDD | CR.1.1 TDD |
| | Config 5 | | CR.2.1 TDD | CR.2.1 TDD |
| Dedicated CORESET parameters | Config 1 | | CCR.1.1 FDD | CCR.1.1 FDD |
| | Config 2 | | CCR.1.1 TDD | CCR.1.1 TDD |
| | Config 3 | | CCR.1.1 TDD | CCR.1.1 FDD |
| | Config 4 | | CCR.1.1 FDD | CCR.1.1 TDD |
| | Config 5 | | CCR.2.1 TDD | CCR.2.1 TDD |
| OCNG Patterns | | | OP.1 | |
| SSB Configuration | Config 1,2,3,4 | | SSB.1 FR1 | |

| Config 5 | | SSB.2 FR1 | |
|--|----------------|------------------|---------|
| SMTC Configuration | | SMTC.1 | |
| Correlation Matrix and Antenna Configuration | | 1x2 Low | |
| EPRE ratio of PSS to SSS | | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | |
| $N_{oc}^{Note 2}$ | Config 1,2,3,4 | dBm/SCS | [-104] |
| | Config 5 | | [-110] |
| $N_{oc}^{Note 2}$ | | dBm/15KH z | [-104] |
| SS-RSRP ^{Note 3} | Config 1,2,3,4 | dBm/SCS | [-87] |
| | Config 5 | | [-90] |
| \hat{E}_s/I_{ot} | | dB | [17] |
| \hat{E}_s/N_{oc} | | dB | [17] |
| I_o^{Note3} | Config 1,2,3,4 | dBm/ 9.36MHz | [-59] |
| | Config 5 | dBm/ 38.16MHz | [-61.9] |
| Propagation Condition | | AWGN | AWGN |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].</p> | | | |

A.6.5.6.1.1.2 Test Requirements

During T1, the UE shall start to send the ACK for PSCell in the DL slot right after DL slot $(i+T_{BWPswitchDelay}+kI)$.

During T3, the UE shall start to send the ACK for PSCell in the DL slot right after DL slot $(j+T_{BWPswitchDelay}+kI)$.

Where, kI is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1 and T3, the start time of SCell interruption during PCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of SCell shall not be longer than the interruption duration specified for active BWP switch in clause 8.2.2.2.5.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after DL slot $(i + T_{BWPswitchDelay} + kI)$, $(j + T_{BWPswitchDelay} + kI)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK.

A.6.5.6.1.2 NR FR1 DL active BWP switch with non-DRX in SA

A.6.5.6.1.2.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6. Supported test configurations are shown in Table A.6.5.6.1.2.1-1.

The test scenario comprises of one NR cell (Cell 1) as given in Table A.6.5.6.1.2.1-2. Cell-specific parameters of the NR cell are specified in Table A.6.5.6.1.2.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE is configured with 2 different UE-specific downlink bandwidth parts, BWP-1 and BWP-2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1.
- UE is configured with a *bwp-InactivityTimer* timer value for Cell1.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for DL BWP switch, sent from the test equipment to the UE, is received at the UE side in Cell1's slot # denoted i . The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after Cell1's DL slot $(i + T_{BWPswitchDelay})$ as defined in clause 8.6 and starts to report valid ACK/NACK for the Cell1 no later than the beginning of the DL slot right after slot $(i + T_{BWPswitchDelay} + kI)$. The UE shall be continuously scheduled on Cell1's BWP-2 starting from the beginning of the DL slot right after slot $(i + T_{BWPswitchDelay})$.

During T2, the test equipment won't transmit DCI format for PDSCH reception on Cell1.

During T3,

The time period T3 starts from the slot # j , where j is the beginning slot of the DL subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after Cell1's slot $(j + T_{BWPswitchDelay})$ as defined in clause 8.6 and starts to report valid ACK/NACK for the Cell1 at latest at the beginning of the DL slot right after slot $(j + T_{BWPswitchDelay} + kI)$. The UE shall be continuously scheduled on Cell1's BWP-1 starting from the beginning of the DL slot right after slot $(j + T_{BWPswitchDelay})$.

The test equipment verifies the DL BWP switch time by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

Table A.6.5.6.1.2.1-1: DL BWP switch supported test configurations

| Config | Description |
|---------|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note 1: | The UE is only required to be tested in one of the supported test configurations. |
| Note 2: | A UE which fulfils the requirements in test case A.6.5.6.1.1 can skip the test cases in A.4.5.6.1.2. |

Table A.6.5.6.1.2.1-2: General test parameters for DL BWP switch in SA

| Parameter | Unit | Value | Comment |
|----------------------------|------|--------|--|
| NR RF Channel Number | | 1 | One NR radio channel is used for this test |
| Active Cell | | Cell 1 | Cell1 on RF channel number 1. |
| CP length | | Normal | |
| DRX | | OFF | |
| <i>bwp-InactivityTimer</i> | ms | [200] | |
| T1 | s | [0.2] | |
| T2 | s | [0.2] | |
| T3 | s | [0.2] | |

Table A.6.5.6.1.2.1-3: NR Cell specific test parameters for DL BWP switch in SA

| Parameter | Unit | Cell 2 |
|-------------------------------------|--------------|---------------------------------|
| Frequency Range | | FR1 |
| Duplex mode | Config 1 | FDD |
| | Config 2,3 | TDD |
| TDD configuration | Config 1 | Not Applicable |
| | Config 2 | TDDConf.1.1 |
| | Config 3 | TDDConf.1.2 |
| BW _{channel} | Config 1 | 10 MHz: N _{RB,c} = 52 |
| | Config 2 | 10 MHz: N _{RB,c} = 52 |
| | Config 3 | 40 MHz: N _{RB,c} = 106 |
| Active BWP ID | | 1, 2 |
| Initial DL BWP Configuration | Config 1,2,3 | DLBWP.0.2 ^{Note 4} |
| Active DL BWP-1 Configuration | Config 1,2,3 | DLBWP.1.1 ^{Note 4} |
| Active DL BWP-2 Configuration | Config 1,2,3 | DLBWP.1.3 ^{Note 4} |
| Initial UL BWP Configuration | Config 1,2,3 | ULBWP.0.2 ^{Note 4} |
| Active UL BWP-1 Configuration | Config 1,2,3 | ULBWP.1.1 ^{Note 4} |
| Active UL BWP-2 Configuration | Config 1,2,3 | ULBWP.1.3 ^{Note 4} |
| PDSCH Reference measurement channel | Config 1 | SR.1.1 FDD |
| | Config 2 | SR.1.1 TDD |
| | Config 3 | SR.2.1 TDD |
| RMSI CORESET parameters | Config 1 | CR.1.1 FDD |
| | Config 2 | CR.1.1 TDD |
| | Config 3 | CR.2.1 TDD |
| Dedicated CORESET parameters | Config 1 | CCR.1.1 FDD |
| | Config 2 | CCR.1.1 TDD |
| | Config 3 | CCR.2.1 TDD |

| | | | |
|--|------------|--------------|-------------|
| OCNG Patterns | | | OP.1 |
| SSB Configuration | Config 1,2 | | SSB.1 FR1 |
| | Config 3 | | SSB.2 FR1 |
| SMTC Configuration | | | SMTC.1 |
| Correlation Matrix and Antenna Configuration | | | 1x2 Low |
| TRS Configuration | Config 1,4 | | TRS.1.1 FDD |
| | Config 2,5 | | TRS.1.1 TDD |
| | Config 3,6 | | TRS.1.2 TDD |
| EPRE ratio of PSS to SSS | | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | |
| N_{oc} ^{Note 2} | Config 1,2 | dBm/SCS | [-104] |
| | Config 3 | | [-101] |
| N_{oc} ^{Note 2} | | dBm/15kHz | [-104] |
| SS-RSRP ^{Note 3} | Config 1,2 | dBm/SCS | [-87] |
| | Config 3 | | [-90] |
| \dot{E}_s/I_{ot} | | dB | [17] |
| \dot{E}_s/N_{oc} | | dB | [17] |
| I_o ^{Note3} | Config 1,2 | dBm/9.36MHz | [-59] |
| | Config 3 | dBm/38.16MHz | [-61.9] |
| Propagation Condition | | | AWGN |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].</p> | | | |

A.6.5.6.1.2.2 Test Requirements

During T1, the UE shall start to send the ACK for Cell1 in the DL slot right after DL slot $(i+T_{BWPswitchDelay}+kI)$.

During T3, the UE shall start to send the ACK for Cell1 in the DL slot right after DL slot $(j+T_{BWPswitchDelay}+kI)$.

Where, kI is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability $bwp-SwitchingDelay$ [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after DL slot ($i+T_{BWPswitchDelay+kI}$), ($j+T_{BWPswitchDelay+kI}$), then the UE shall use the next available uplink resource for reporting the corresponding ACK.

A.6.5.6.2 RRC-based Active BWP Switch

A.6.5.6.2.1 NR FR1- NR FR1 DL active BWP switch of PCell with non-DRX in SA

A.6.5.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6. Supported test configurations are shown in Table A.6.5.6.2.1.1-1.

The test scenario comprises of one NR PCell (Cell 1) as given in Table A.6.5.6.2.1.1-2. Cell-specific parameters of NR PCell are specified in Table A.6.5.6.2.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1 (PCell).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PCell.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is completely received at the UE side in PCell's slot # denoted i . The UE shall reconfigure its bandwidth part with the updated bandwidth part configuration.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PCell's DL slot ($i+T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}$) as defined in clause 8.6.3 and be ready for the reception of uplink grant for the PCell no later than at the beginning of the DL slot right after slot ($i+T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}$). The UE shall be continuously scheduled on PCell's BWP-1 starting from the beginning of the DL slot right after slot ($i+T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}$).

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in clause 8.6.3.

The test equipment verifies the DL BWP switch time in PCell by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when RRC Reconfiguration Complete message is received.

Table A.6.5.6.2.1.1-1: DL BWP switch supported test configurations

| Config | Description |
|--|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note 1: The UE is only required to be tested in one of the supported test configurations | |

Table A.6.5.6.2.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

| Parameter | Unit | Value | Comment |
|---|------|--------|--|
| NR RF Channel Number | | 1 | One NR radio channel is used for this test |
| Active PCell | | Cell 1 | PCell on RF channel number 1. |
| CP length | | Normal | |
| DRX | | OFF | |
| Cell-individual offset for cells on RF channel number 1 | dB | 0 | Individual offset for cells on PCC. |
| T1 | s | [0,2] | |

Table A.6.5.6.2.1.1-3: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

| Parameter | | Unit | Cell 1 |
|-------------------------------------|-------------------------------|------------|---------------------------------|
| Frequency Range | | | FR1 |
| Duplex mode | Config 1,4 | | FDD |
| | Config 2,3,5,6 | | TDD |
| TDD configuration | Config 1,4 | | Not Applicable |
| | Config 2,5 | | TDDConf.1.1 |
| | Config 3,6 | | TDDConf.1.2 |
| BW _{channel} | Config 1,4 | | 10 MHz: N _{RB,c} = 52 |
| | Config 2,5 | | 10 MHz: N _{RB,c} = 52 |
| | Config 3,6 | | 40 MHz: N _{RB,c} = 106 |
| Active BWP ID | | | 1 |
| Initial DL BWP Configuration | Config 1,4 | | DLBWP.0.2 |
| | Config 2,5 | | |
| | Config 3,6 | | |
| Initial UL BWP Configuration | Config 1,4 | | ULBWP.0.2 |
| | Config 2,5 | | |
| | Config 3,6 | | |
| Initial Condition | Active DL BWP-1 Configuration | Config 1,4 | DLBWP.1.3 |
| | | Config 2,5 | |
| | | Config 3,6 | |
| | Active UL BWP-1 Configuration | Config 1,4 | ULBWP.1.3 |
| | | Config 2,5 | |
| | | Config 3,6 | |
| Final Condition | Active DL BWP-1 Configuration | Config 1,4 | DLBWP.1.1 |
| | | Config 2,5 | |
| | | Config 3,6 | |
| | Active UL BWP-1 Configuration | Config 1,4 | ULBWP.1.1 |
| | | Config 2,5 | |
| | | Config 3,6 | |
| Initial UL BWP Configuration | Config 1,4 | | ULBWP.0.2 |
| | Config 2,5 | | |
| | Config 3,6 | | |
| Active UL BWP-1 Configuration | Config 1,4 | | ULBWP.1.3 |
| | Config 2,5 | | |
| | Config 3,6 | | |
| Active UL BWP-2 Configuration | Config 1,4 | | ULBWP.1.1 |
| | Config 2,5 | | |
| | Config 3,6 | | |
| PDSCH Reference measurement channel | Config 1,4 | | SR.1.1 FDD |
| | Config 2,5 | | SR.1.1 TDD |
| | Config 3,6 | | SR2.1 TDD |
| | Config 1,4 | | CR.1.1 FDD |

| | | | |
|---|----------------|--------------|-------------|
| RMSI CORESET parameters | Config 2,5 | | CR.1.1 TDD |
| | Config 3,6 | | CR.2.1 TDD |
| Dedicated CORESET parameters | Config 1,4 | | CCR.1.1 FDD |
| | Config 2,5 | | CCR.1.1 TDD |
| | Config 3,6 | | CCR.2.1 TDD |
| OCNG Patterns | | | OP.1 |
| SSB Configuration | Config 1,2,4,5 | | SSB.1 FR1 |
| | Config 3,6 | | SSB.2 FR1 |
| SMTC Configuration | | | SMTC.1 |
| TRS Configuration | Config 1,4 | | TRS.1.1 FDD |
| | Config 2,5 | | TRS.1.1 TDD |
| | Config 3,6 | | TRS.1.2 TDD |
| Antenna Configuration | | | 1x2 |
| Propagation Condition | | | AWGN |
| EPRE ratio of PSS to SSS | | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH | | | |
| EPRE ratio of OCNG DMRS to SSS ^(Note 1) | | | |
| EPRE ratio of OCNG to OCNG DMRS ^(Note 1) | | | |
| N_{oc} ^{Note 2} | | | |
| SS-RSRP ^{Note 3} | | dBm/15 kHz | [-87] |
| \hat{E}_s/I_{ot} | | dB | 17 |
| \hat{E}_s/N_{oc} | | dB | 17 |
| I_o ^{Note3} | Config 1,2,4,5 | dBm/9.36MHz | TBD |
| | Config 3,6 | dBm/38.16MHz | TBD |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |
| Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | |
| Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | |
| Note 4: Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3]. | | | |

A.6.5.6.2.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PCell in the DL slot right after slot $(i + T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC})$.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6 Measurement procedure

A.6.6.1 Intra-frequency Measurements

A.6.6.1.1 SA event triggered reporting tests without gap under non-DRX

A.6.6.1.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2.5.1 and 9.2.5.2.

A.6.6.1.1.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell and neighbour cell are given in Table A.6.6.1.1.1-1 and A.6.6.1.1.1-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.6.6.1.1.2-1: Supported test configurations

| Configuration | Description |
|---|---|
| 1 | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations. | |

Table A.6.6.1.1.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for FR1

| Parameter | Unit | Test configuration | Value | Comment |
|---|------|--------------------|----------------------|--|
| Active cell | | 1, 2, 3 | Cell 1 | |
| Neighbour cell | | 1, 2, 3 | Cell 2 | Cell to be identified. |
| RF Channel Number | | 1, 2, 3 | 1: Cell 1 and Cell 2 | |
| SSB configuration | | 1 | SSB.1 FR1 | |
| | | 2 | SSB.1 FR1 | |
| | | 3 | SSB.2 FR1 | |
| SMTC configuration | | 1 | SMTC.2 | |
| | | 2 | SMTC.1 | |
| | | 3 | SMTC.1 | |
| A3-Offset | dB | 1, 2, 3 | -4.5 | |
| CP length | | 1, 2, 3 | Normal | |
| Hysteresis | dB | 1, 2, 3 | 0 | |
| Time To Trigger | s | 1, 2, 3 | 0 | |
| Filter coefficient | | 1, 2, 3 | 0 | L3 filtering is not used |
| DRX | | 1, 2, 3 | OFF | |
| Time offset between serving and neighbour cells | | 1 | 3 ms | Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1. |
| | | 2 | 3 μ s | Synchronous cells |
| | | 3 | 3 μ s | Synchronous cells |
| T1 | s | 1, 2, 3 | 5 | |
| T2 | s | 1, 2, 3 | 5 | |

Table A.6.6.1.1.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for FR1

| Parameter | Unit | Test configuration | Cell 1 | | Cell 2 | |
|---|---------------|--------------------|------------------------|--------|------------------------|--------|
| | | | T1 | T2 | T1 | T2 |
| TDD configuration | | 1 | TN/A | | TN/A | |
| | | 2 | TDDConf.1.1 | | TDDConf.1.1 | |
| | | 3 | TDDConf.2.1 | | TDDConf.2.1 | |
| PDSCH RMC configuration | | 1 | SR.1.1 FDD | | N/A | |
| | | 2 | SR.1.1 TDD | | | |
| | | 3 | SR.2.1 TDD | | | |
| RMSI CORESET RMC configuration | | 1 | CR.1.1 FDD | | CR.1.1 FDD | |
| | | 2 | CR.1.1 TDD | | CR.1.1 TDD | |
| | | 3 | CR.2.1 TDD | | CR.2.1 TDD | |
| Dedicated CORESET RMC configuration | | 1 | CCR.1.1 FDD | | CCR.1.1 FDD | |
| | | 2 | CCR.1.1 TDD | | CCR.1.1 TDD | |
| | | 3 | CCR.2.1 TDD | | CCR.2.1 TDD | |
| OCNG Patterns | | 1, 2, 3 | OP.1 | | OP.1 | |
| TRS Configuration | | 1 | TRS.1.1 FDD | | N/A | |
| | | 2 | TRS.1.1 TDD | | N/A | |
| | | 3 | TRS.1.2 TDD | | N/A | |
| Initial BWP configuration | | 1, 2, 3 | DLBWP.0.1 ULBWP.0.1 | | DLBWP.0.1 ULBWP.0.1 | |
| Active DL BWP configuration | | 1, 2, 3 | DLBWP.1.1 | | DLBWP.1.1 | |
| Active UL BWP configuration | | 1, 2, 3 | ULBWP.1.1 | | ULBWP.1.1 | |
| RLM-RS | | 1, 2, 3 | SSB | | SSB | |
| N_{oc} ^{Note 2} | dBm/SCS | 1 | -98 | | | |
| | | 2 | -98 | | | |
| | | 3 | -95 | | | |
| N_{oc} ^{Note 2} | dBm/15 kHz | 1 | -98 | | | |
| | | 2 | | | | |
| | | 3 | | | | |
| \hat{E}_s/I_{ot} | dB | 1 | 4 | -1.46 | -Infinity | -1.46 |
| | | 2 | | | | |
| | | 3 | | | | |
| \hat{E}_s/N_{oc} | dB | 1 | 4 | 4 | -Infinity | 4 |
| | | 2 | | | | |
| | | 3 | | | | |
| SS-RSRP ^{Note 3} | dBm/SCS kHz | 1 | -94 | -94 | -Infinity | -94 |
| | | 2 | -94 | -94 | -Infinity | -94 |
| | | 3 | -91 | -91 | -Infinity | -91 |
| I _o | dBm/9.36 MHz | 1 | -64.60 | -62.25 | --64.60 | -62.25 |
| | dBm/9.36 MHz | 2 | -64.60 | -62.25 | --64.60 | -62.25 |
| | dBm/38.16 MHz | 3 | -58.50 | -56.16 | --58.50 | -56.16 |
| Propagation Condition | | 1, 2, 3 | AWGN | | | |
| <p>Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | |

A.6.6.1.1.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.1.2 SA event triggered reporting tests without gap under DRX

A.6.6.1.2.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2.5.1 and 9.2.5.2.

A.6.6.1.2.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.6.6.1.2.2-1, A.6.6.1.2.2-2 and A.6.6.1.2.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.6.6.1.2.2-1: Supported test configurations

| Configuration | Description |
|---|---|
| 1 | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations. | |

Table A.6.6.1.2.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for PCell in FR1 with DRX

| Parameter | Unit | Test configuration | Value | | Comment |
|--------------------|------|--------------------|----------------------|--------|------------------------|
| | | | Test 1 | Test 2 | |
| Active cell | | 1, 2, 3 | Cell 1 | | |
| Neighbour cell | | 1, 2, 3 | Cell 2 | | Cell to be identified. |
| RF Channel Number | | 1, 2, 3 | 1: Cell 1 and Cell 2 | | |
| SSB configuration | | 1 | SSB.1 FR1 | | |
| | | 2 | SSB.1 FR1 | | |
| | | 3 | SSB.2 FR1 | | |
| SMTC configuration | | 1 | SMTC.2 | | |
| | | 2 | SMTC.1 | | |
| | | 3 | SMTC.1 | | |

| | | | | | |
|---|----|---------|-----------|-------|---|
| A3-Offset | dB | 1, 2, 3 | -4.5 | | |
| CP length | | 1, 2, 3 | Normal | | |
| Hysteresis | dB | 1, 2, 3 | 0 | | |
| Time To Trigger | s | 1, 2, 3 | 0 | | |
| Filter coefficient | | 1, 2, 3 | 0 | | L3 filtering is not used |
| DRX | | 1, 2, 3 | DRX.1 | DRX.2 | |
| Time offset between serving and neighbour cells | | 1 | 3 ms | | Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1. |
| | | 2 | 3 μ s | | Synchronous cells |
| | | 3 | 3 μ s | | Synchronous cells |
| T1 | s | 1, 2, 3 | 5 | | |
| T2 | s | 1, 2, 3 | 5 | 10 | |

Table A.6.6.1.2.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for PCell in FR1 with DRX

| Parameter | Unit | Test configuration | Cell 1 | | Cell 2 | |
|-------------------------------------|-------------|--------------------|------------------------|-------|------------------------|-------|
| | | | T1 | T2 | T1 | T2 |
| TDD configuration | | 1 | TN/A | | TN/A | |
| | | 2 | TDDConf.1.1 | | TDDConf.1.1 | |
| | | 3 | TDDConf.2.1 | | TDDConf.2.1 | |
| PDSCH RMC configuration | | 1 | SR.1.1 FDD | | N/A | |
| | | 2 | SR.1.1 TDD | | | |
| | | 3 | SR.2.1 TDD | | | |
| RMSI CORESET RMC configuration | | 1 | CR.1.1 FDD | | CR.1.1 FDD | |
| | | 2 | CR.1.1 TDD | | CR.1.1 TDD | |
| | | 3 | CR.2.1 TDD | | CR.2.1 TDD | |
| Dedicated CORESET RMC configuration | | 1 | CCR.1.1 FDD | | CCR.1.1 FDD | |
| | | 2 | CCR.1.1 TDD | | CCR.1.1 TDD | |
| | | 3 | CCR.2.1 TDD | | CCR.2.1 TDD | |
| OCNG Patterns | | 1, 2, 3 | OP.1 | | OP.1 | |
| TRS configuration | | 1 | TRS.1.1 FDD | | N/A | |
| | | 2 | TRS.1.1 TDD | | N/A | |
| | | 3 | TRS.1.2 TDD | | N/A | |
| Initial BWP configuration | | 1, 2, 3 | DLBWP.0.1 ULBWP.0.1 | | DLBWP.0.1 ULBWP.0.1 | |
| Active DL BWP configuration | | 1, 2, 3 | DLBWP.1.1 | | DLBWP.1.1 | |
| Active UL BWP configuration | | 1, 2, 3 | ULBWP.1.1 | | ULBWP.1.1 | |
| RLM-RS | | 1, 2, 3 | SSB | | SSB | |
| N_{oc} Note 2 | dBm/SCS | 1 | | | -98 | |
| | | 2 | | | -98 | |
| | | 3 | | | -95 | |
| N_{oc} Note 2 | dBm/15 kHz | 1 | | | -98 | |
| | | 2 | | | | |
| | | 3 | | | | |
| \hat{E}_s/I_{ot} | dB | 1 | 4 | -1.46 | -Infinity | -1.46 |
| | | 2 | | | | |
| | | 3 | | | | |
| \hat{E}_s/N_{oc} | dB | 1 | 4 | 4 | -Infinity | 4 |
| | | 2 | | | | |
| | | 3 | | | | |
| SS-RSRP Note 3 | dBm/SCS kHz | 1 | -94 | -94 | -Infinity | -94 |
| | | 2 | -94 | -94 | -Infinity | -94 |
| | | 3 | -91 | -91 | -Infinity | -91 |

| | | | | | | |
|-----------------------|--|---------|--------|--------|---------|--------|
| Io | dBm/9.36 MHz | 1 | -64.60 | -62.25 | --64.60 | -62.25 |
| | dBm/9.36 MHz | 2 | -64.60 | -62.25 | --64.60 | -62.25 |
| | dBm/38.16 MHz | 3 | -58.50 | -56.16 | --58.50 | -56.16 |
| Propagation Condition | | 1, 2, 3 | AWGN | | | |
| Note 1: | The resources for uplink transmission are assigned to the UE prior to the start of time period T2. | | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | |
| Note 3: | SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | |

A.6.6.1.2.3 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 6400 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.1.3 SA event triggered reporting tests with per-UE gaps under non-DRX

A.6.6.1.3.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2.6.2 and 9.2.6.3.

A.6.6.1.3.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.6.6.1.3.1-1 and A.6.6.1.3.1-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

Table A.6.6.1.3.2-1: Supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations. |

Table A.6.6.1.3.2-2: General test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1

| Parameter | Unit | Test configuration | Value | Comment |
|---|------|--------------------|----------------------|---|
| Active cell | | 1, 2, 3 | Cell 1 | |
| Neighbour cell | | 1, 2, 3 | Cell 2 | Cell to be identified. |
| RF Channel Number | | 1, 2, 3 | 1: Cell 1 and Cell 2 | |
| Measurement gap type | | 1, 2, 3 | Per-UE gaps | |
| Measurement gap repetition periodicity | ms | 1, 2, 3 | 40 | |
| Measurement gap length | ms | 1, 2, 3 | 6 | |
| Measurement gap offset | ms | 1, 2, 3 | 39 | |
| SSB configuration | | 1 | SSB.1 FR1 | |
| | | 2 | SSB.1 FR1 | |
| | | 3 | SSB.2 FR1 | |
| SMTC configuration | | 1 | SMTC.2 | |
| | | 2 | SMTC.1 | |
| | | 3 | SMTC.1 | |
| CSI-RS parameters | | 1 | CSI-RS.1.2 FDD | |
| | | 2 | CSI-RS.1.2 TDD | |
| | | 3 | CSI-RS.2.2 TDD | |
| A3-Offset | dB | 1, 2, 3 | -4.5 | |
| CP length | | 1, 2, 3 | Normal | |
| Hysteresis | dB | 1, 2, 3 | 0 | |
| Time To Trigger | s | 1, 2, 3 | 0 | |
| Filter coefficient | | 1, 2, 3 | 0 | L3 filtering is not used |
| DRX | ms | 1, 2, 3 | | OFF |
| Time offset between serving and neighbour cells | | 1 | 3 ms | Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1. |
| | | 2 | 3 μ s | Synchronous cells |
| | | 3 | 3 μ s | Synchronous cells |
| T1 | s | 1, 2, 3 | 5 | |
| T2 | s | 1, 2, 3 | 5 | |

Table A.6.6.1.3.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1

| Parameter | Unit | Test configuration | Cell 1 | | Cell 2 | |
|-------------------------------------|------|--------------------|-------------|----|-------------|----|
| | | | T1 | T2 | T1 | T2 |
| TDD configuration | | 1 | TN/A | | TN/A | |
| | | 2 | TDDConf.1.1 | | TDDConf.1.1 | |
| | | 3 | TDDConf.2.1 | | TDDConf.2.1 | |
| PDSCH RMC configuration | | 1 | SR.1.1 FDD | | N/A | |
| | | 2 | SR.1.1 TDD | | | |
| | | 3 | SR.2.1 TDD | | | |
| RMSI CORESET RMC configuration | | 1 | CR.1.1 FDD | | CR.1.1 FDD | |
| | | 2 | CR.1.1 TDD | | CR.1.1 TDD | |
| | | 3 | CR.2.1 TDD | | CR.2.1 TDD | |
| Dedicated CORESET RMC configuration | | 1 | CCR.1.1 FDD | | CCR.1.1 FDD | |
| | | 2 | CCR.1.1 TDD | | CCR.1.1 TDD | |
| | | 3 | CCR.2.1 TDD | | CCR.2.1 TDD | |

| | | | | | | |
|---|---------------|---------|------------------------|--------|------------------------|--------|
| OCNG Patterns | | 1, 2, 3 | OP.1 | | OP.1 | |
| TRS configuration | | 1 | TRS.1.1 FDD | | N/A | |
| | | 2 | TRS.1.1 TDD | | N/A | |
| | | 3 | TRS.1.2 TDD | | N/A | |
| Initial BWP configuration | | 1, 2, 3 | DLBWP.0.1 ULBWP.0.1 | | DLBWP.0.1 ULBWP.0.1 | |
| Active DL BWP configuration | | 1, 2, 3 | DLBWP.1.2 | | DLBWP.1.1 | |
| Active UL BWP configuration | | 1, 2, 3 | ULBWP.1.2 | | ULBWP.1.1 | |
| RLM-RS | | 1, 2, 3 | CSI-RS | | SSB | |
| N_{oc} Note 2 | dBm/SCS | 1 | -98 | | | |
| | | 2 | -98 | | | |
| | | 3 | -95 | | | |
| N_{oc} Note 2 | dBm/15 kHz | 1 | -98 | | | |
| | | 2 | | | | |
| | | 3 | | | | |
| \hat{E}_s/I_{ot} | dB | 1 | 4 | -1.46 | -Infinity | -1.46 |
| | | 2 | | | | |
| | | 3 | | | | |
| \hat{E}_s/N_{oc} | dB | 1 | 4 | 4 | -Infinity | 4 |
| | | 2 | | | | |
| | | 3 | | | | |
| SS-RSRP Note 3 | dBm/SCS kHz | 1 | -94 | -94 | -Infinity | -94 |
| | | 2 | -94 | -94 | -Infinity | -94 |
| | | 3 | -91 | -91 | -Infinity | -91 |
| Io | dBm/9.36 MHz | 1 | -64.60 | -62.25 | --64.60 | -62.25 |
| | dBm/9.36 MHz | 2 | -64.60 | -62.25 | --64.60 | -62.25 |
| | dBm/38.16 MHz | 3 | -58.50 | -56.16 | --58.50 | -56.16 |
| Propagation Condition | | 1, 2, 3 | AWGN | | | |
| <p>Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | |

A.6.6.1.3.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCCH.

A.6.6.1.4 SA event triggered reporting tests with per-UE gaps under DRX

A.6.6.1.4.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2.6.2 and 9.2.6.3.

A.6.6.1.4.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.6.6.1.4.2-1, A.6.6.1.4.2-2 and A.6.6.1.4.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.6.6.1.4.2-1: Supported test configurations

| Configuration | Description |
|---|---|
| 1 | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations. | |

Table A.6.6.1.4.2-2: General test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1 with DRX

| Parameter | Unit | Test configuration | Value | | Comment |
|--|------|--------------------|----------------------|--------|------------------------|
| | | | Test 1 | Test 2 | |
| Active cell | | 1, 2, 3 | Cell 1 | | |
| Neighbour cell | | 1, 2, 3 | Cell 2 | | Cell to be identified. |
| RF Channel Number | | 1, 2, 3 | 1: Cell 1 and Cell 2 | | |
| Measurement gap type | | 1, 2, 3 | Per-UE gaps | | |
| Measurement gap repetition periodicity | ms | 1, 2, 3 | 40 | | |
| Measurement gap length | ms | 1, 2, 3 | 6 | | |
| Measurement gap offset | ms | 1, 2, 3 | 39 | | |
| SSB configuration | | 1 | SSB.1 FR1 | | |
| | | 2 | SSB.1 FR1 | | |
| | | 3 | SSB.2 FR1 | | |
| SMTC configuration | | 1 | SMTC.2 | | |
| | | 2 | SMTC.1 | | |
| | | 3 | SMTC.1 | | |
| CSI-RS parameters | | 1 | CSI-RS.1.2 FDD | | |
| | | 2 | CSI-RS.1.2 TDD | | |
| | | 3 | CSI-RS.2.2 TDD | | |

| | | | | | |
|---|----|---------|-----------|-------|---|
| A3-Offset | dB | 1, 2, 3 | -4.5 | | |
| CP length | | 1, 2, 3 | Normal | | |
| Hysteresis | dB | 1, 2, 3 | 0 | | |
| Time To Trigger | s | 1, 2, 3 | 0 | | |
| Filter coefficient | | 1, 2, 3 | 0 | | L3 filtering is not used |
| DRX | | 1, 2, 3 | DRX.1 | DRX.2 | |
| Time offset between serving and neighbour cells | | 1 | 3 ms | | Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 3. |
| | | 2 | 3 μ s | | Synchronous cells |
| | | 3 | 3 μ s | | Synchronous cells |
| T1 | s | 1, 2, 3 | 5 | | |
| T2 | s | 1, 2, 3 | 5 | 10 | |

Table A.6.6.1.4.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1 with DRX

| Parameter | Unit | Test configuration | Cell 1 | | Cell 2 | |
|-------------------------------------|-------------|--------------------|------------------------|-------|------------------------|-------|
| | | | T1 | T2 | T1 | T2 |
| TDD configuration | | 1 | TN/A | | TN/A | |
| | | 2 | TDDConf.1.1 | | TDDConf.1.1 | |
| | | 3 | TDDConf.2.1 | | TDDConf.2.1 | |
| PDSCH RMC configuration | | 1 | SR.1.1 FDD | | N/A | |
| | | 2 | SR.1.1 TDD | | | |
| | | 3 | SR.2.1 TDD | | | |
| RMSI CORESET RMC configuration | | 1 | CR.1.1 FDD | | CR.1.1 FDD | |
| | | 2 | CR.1.1 TDD | | CR.1.1 TDD | |
| | | 3 | CR.2.1 TDD | | CR.2.1 TDD | |
| Dedicated CORESET RMC configuration | | 1 | CCR.1.1 FDD | | CCR.1.1 FDD | |
| | | 2 | CCR.1.1 TDD | | CCR.1.1 TDD | |
| | | 3 | CCR.2.1 TDD | | CCR.2.1 TDD | |
| OCNG Patterns | | 1, 2, 3 | OP.1 | | OP.1 | |
| TRS configuration | | 1 | TRS.1.1 FDD | | N/A | |
| | | 2 | TRS.1.1 TDD | | N/A | |
| | | 3 | TRS.1.2 TDD | | N/A | |
| Initial BWP configuration | | 1, 2, 3 | DLBWP.0.1 ULBWP.0.1 | | DLBWP.0.1 ULBWP.0.1 | |
| Active DL BWP configuration | | 1, 2, 3 | DLBWP.1.2 | | DLBWP.1.1 | |
| Active UL BWP configuration | | 1, 2, 3 | ULBWP.1.2 | | ULBWP.1.1 | |
| RLM-RS | | 1, 2, 3 | CSI-RS | | SSB | |
| N_{oc} Note 2 | dBm/SCS | 1 | -98 | | | |
| | | 2 | -98 | | | |
| | | 3 | -95 | | | |
| N_{oc} Note 2 | dBm/15 kHz | 1 | -98 | | | |
| | | 2 | | | | |
| | | 3 | | | | |
| \hat{E}_s/I_{ot} | dB | 1 | 4 | -1.46 | -Infinity | -1.46 |
| | | 2 | | | | |
| | | 3 | | | | |
| \hat{E}_s/N_{oc} | dB | 1 | 4 | 4 | -Infinity | 4 |
| | | 2 | | | | |
| | | 3 | | | | |
| SS-RSRP Note 3 | dBm/SCS kHz | 1 | -94 | -94 | -Infinity | -94 |
| | | 2 | -94 | -94 | -Infinity | -94 |

| | | | | | | |
|-----------------------|--|---------|--------|--------|-----------|--------|
| I _o | | 3 | -91 | -91 | -Infinity | -91 |
| | dBm/9.36 MHz | 1 | -64.60 | -62.25 | --64.60 | -62.25 |
| | dBm/9.36 MHz | 2 | -64.60 | -62.25 | -64.60 | -62.25 |
| | dBm/38.16 MHz | 3 | -58.50 | -56.16 | --58.50 | -56.16 |
| Propagation Condition | | 1, 2, 3 | AWGN | | | |
| Note 1: | Table A.6.6.1.4.2-1 The resources for uplink transmission are assigned to the UE prior to the start of time period T2. | | | | | |
| Note 2: | Table A.6.6.1.4.2-1 Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | |
| Note 3: | Table A.6.6.1.4.2-1 SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | |

Table A.6.6.1.4.2-4: Void**Table A.6.6.1.4.2-5: Void**

A.6.6.1.4.3 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 6400 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCCH.

A.6.6.1.5 SA event triggered reporting tests without gap under non-DRX with SSB index reading

A.6.6.1.5.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the FDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2.

A.6.6.1.5.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for FDD PCell and neighbour cell are given in Table A.6.6.1.5.2-1 and A.6.6.1.5.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.6.6.1.5.2-1: Supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |

Table A.6.6.1.5.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for FDD PCell in FR1 with SSB index reading

| Parameter | Unit | Test configuration | Value | Comment |
|---|------|--------------------|----------------------|---|
| Active cell | | 1 | Cell 1 | |
| Neighbour cell | | 1 | Cell 2 | Cell to be identified. |
| RF Channel Number | | 1 | 1: Cell 1 and Cell 2 | |
| SSB configuration | | 1 | SSB.1 FR1 | |
| SMTC configuration | | 1 | SMTC.2 | |
| A3-Offset | dB | 1 | -4.5 | |
| CP length | | 1 | Normal | |
| Hysteresis | dB | 1 | 0 | |
| Time To Trigger | s | 1 | 0 | |
| Filter coefficient | | 1 | 0 | L3 filtering is not used |
| DRX | ms | 1 | | OFF |
| Time offset between serving and neighbour cells | | 1 | 3 ms | Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1. |
| T1 | s | 1 | 5 | |
| T2 | s | 1 | 5 | |

Table A.6.6.1.5.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for FDD PCell in FR1 with SSB index reading

| Parameter | Unit | Test configuration | Cell 1 | | Cell 2 | |
|-------------------------------------|------------|--------------------|------------------------|-------|------------------------|-------|
| | | | T1 | T2 | T1 | T2 |
| TDD configuration | | 1 | N/A | | N/A | |
| PDSCH RMC configuration | | 1 | SR.1.1 FDD | | N/A | |
| RMSI CORESET RMC configuration | | 1 | CR.1.1 FDD | | CR.1.1 FDD | |
| Dedicated CORESET RMC configuration | | 1 | CCR.1.1 FDD | | CCR.1.1 FDD | |
| OCNG Patterns | | 1 | OP.1 | | OP.1 | |
| TRS configuration | | 1 | TRS.1.1 FDD | | N/A | |
| Initial BWP configuration | | 1 | DLBWP.0.1 ULBWP.0.1 | | DLBWP.0.1 ULBWP.0.1 | |
| Active DL BWP configuration | | 1 | DLBWP.1.1 | | DLBWP.1.1 | |
| Active UL BWP configuration | | 1 | ULBWP.1.1 | | ULBWP.1.1 | |
| RLM-RS | | 1 | SSB | | SSB | |
| N_{oc} Note 2 | dBm/SCS | 1 | -98 | | | |
| N_{oc} Note 2 | dBm/15 kHz | 1 | -98 | | | |
| \hat{E}_s/I_{ot} | dB | 1 | 4 | -1.46 | -Infinity | -1.46 |

| | | | | | | |
|---|--------------|---|--------|--------|-----------|--------|
| \hat{E}_s / N_{oc} | dB | 1 | 4 | 4 | -Infinity | 4 |
| SS-RSRP ^{Note 3} | dBm/SCS kHz | 1 | -94 | -94 | -Infinity | -94 |
| lo | dBm/9.36 MHz | 1 | -64.60 | -62.25 | --64.60 | -62.25 |
| Propagation Condition | | 1 | AWGN | | | |
| <p>Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | |

A.6.6.1.5.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCC}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCC.

A.6.6.1.6 SA event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading

A.6.6.1.6.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the FDD intra-frequency cell search requirements in clause 9.2.6.2 and 9.2.6.3.

A.6.6.1.6.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for FDD PCell and neighbour cell are given in Table A.6.6.1.6.2-1 and A.6.6.1.6.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

Table A.6.6.1.6.2-1: Supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |

Table A.6.6.1.6.2-2: General test parameters for SA intra-frequency event triggered reporting with gap for FDD PCell in FR1 with SSB index reading

| Parameter | Unit | Test configuration | Value | Comment |
|---|------|--------------------|----------------------|---|
| Active cell | | 1 | Cell 1 | |
| Neighbour cell | | 1 | Cell 2 | Cell to be identified. |
| RF Channel Number | | 1 | 1: Cell 1 and Cell 2 | |
| Measurement gap type | | 1 | Per-UE gaps | |
| Measurement gap repetition periodicity | ms | 1 | 40 | |
| Measurement gap length | ms | 1 | 6 | |
| Measurement gap offset | ms | 1 | 39 | |
| SSB configuration | | 1 | SSB.1 FR1 | |
| SMTC configuration | | 1 | SMTC.2 | |
| CSI-RS parameters | | 1 | CSI-RS.1.2 FDD | |
| A3-Offset | dB | 1 | -4.5 | |
| CP length | | 1 | Normal | |
| Hysteresis | dB | 1 | 0 | |
| Time To Trigger | s | 1 | 0 | |
| Filter coefficient | | 1 | 0 | L3 filtering is not used |
| DRX | ms | 1 | | OFF |
| Time offset between serving and neighbour cells | | 1 | 3 ms | Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1. |
| T1 | s | 1 | 5 | |
| T2 | s | 1 | 5 | |

Table A.6.6.1.6.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with gap for FDD PCell in FR1 with SSB index reading

| Parameter | Unit | Test configuration | Cell 1 | | Cell 2 | |
|-------------------------------------|------------|--------------------|------------------------|-------|------------------------|-------|
| | | | T1 | T2 | T1 | T2 |
| TDD configuration | | 1 | N/A | | N/A | |
| PDSCH RMC configuration | | 1 | SR.1.1 FDD | | N/A | |
| RMSI CORESET RMC configuration | | 1 | CR.1.1 FDD | | CR.1.1 FDD | |
| Dedicated CORESET RMC configuration | | 1 | CCR.1.1 FDD | | CCR.1.1 FDD | |
| OCNG Patterns | | 1 | OP.1 | | OP.1 | |
| TRS configuration | | 1 | TRS.1.1 FDD | | N/A | |
| Initial BWP configuration | | 1 | DLBWP.0.1 ULBWP.0.1 | | DLBWP.0.1 ULBWP.0.1 | |
| Active DL BWP configuration | | 1 | DLBWP.1.2 | | DLBWP.1.1 | |
| Active UL BWP configuration | | 1 | ULBWP.1.2 | | ULBWP.1.1 | |
| RLM-RS | | 1 | CSI-RS | | SSB | |
| N_{oc} Note 2 | dBm/SCS | 1 | -98 | | | |
| N_{oc} Note 2 | dBm/15 kHz | 1 | -98 | | | |
| \hat{E}_s/I_{ot} | dB | 1 | 4 | -1.46 | -Infinity | -1.46 |

| | | | | | | |
|---|--------------|---|--------|--------|-----------|--------|
| \hat{E}_s / N_{oc} | dB | 1 | 4 | 4 | -Infinity | 4 |
| SS-RSRP ^{Note 3} | dBm/SCS kHz | 1 | -94 | -94 | -Infinity | -94 |
| lo | dBm/9.36 MHz | 1 | -64.60 | -62.25 | --64.60 | -62.25 |
| Propagation Condition | | 1 | AWGN | | | |
| <p>Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | |

A.6.6.1.6.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCC}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCC.

A.6.6.2 Inter-frequency Measurements

A.6.6.2.1 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is not used

A.6.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.6.6.2.1.1-1, A.6.6.2.1.1-2 and A.6.6.2.1.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.6.6.2.1.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.6.6.2.1.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.6.6.2.1.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

| Config | Description |
|---|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| <p>Note 1: The UE is only required to be tested in one of the supported test configurations</p> <p>Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell</p> | |

Table A.6.6.2.1.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

| Parameter | Unit | Test configuration | Value | | Comment |
|---|------|--------------------|-------------------|--------|---|
| | | | Test 1 | Test 2 | |
| NR RF Channel Number | | Config 1,2,3 | 1, 2 | | Two FR1 NR carrier frequencies is used. |
| Active cell | | Config 1,2,3 | NR cell 1 (Pcell) | | NR Cell 1 is on NR RF channel number 1. |
| Neighbour cell | | Config 1,2,3 | NR cell2 | | NR cell 2 is on NR RF channel number 2. |
| Gap Pattern Id | | Config 1,2,3 | 0 | 4 | As specified in clause 9.1.2-1. |
| Measurement gap offset | | Config 1,2,3 | 9 | 9 | |
| A3-Offset | dB | Config 1,2,3 | -6 | | |
| Hysteresis | dB | Config 1,2,3 | 0 | | |
| CP length | | Config 1,2,3 | Normal | | |
| TimeToTrigger | s | Config 1,2,3 | 0 | | |
| Filter coefficient | | Config 1,2,3 | 0 | | L3 filtering is not used |
| DRX | | Config 1,2,3 | OFF | | DRX is not used |
| Time offset between serving and neighbour cells | | Config 1 | 3ms | | Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1. |
| | | Config 2,3 | 3μs | | Synchronous cells. |
| T1 | s | Config 1,2,3 | 5 | | |
| T2 | s | Config 1,2,3 | 1 | 1 | |

Table A.6.6.2.1.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

| Parameter | | Unit | Test configuration | Cell 1 | | Cell 2 | |
|-----------------------|------------------|------|--------------------|-----------------------------|----|--------|----|
| | | | | T1 | T2 | T1 | T2 |
| NR RF Channel Number | | | Config 1,2,3 | 1 | | 2 | |
| Duplex mode | | | Config 1 | FDD | | | |
| | | | Config 2,3 | TDD | | | |
| TDD configuration | | | Config 1 | Not Applicable | | | |
| | | | Config 2 | TDDConf.1.1 | | | |
| | | | Config 3 | TDDConf.2.1 | | | |
| BW _{channel} | | MHz | Config 1,2 | 10: N _{RB,c} = 52 | | | |
| | | | Config 3 | 40: N _{RB,c} = 106 | | | |
| BWP BW | | MHz | Config 1,2 | 10: N _{RB,c} = 52 | | | |
| | | | Config 3 | 40: N _{RB,c} = 106 | | | |
| BWP configuration | Initial DL BWP | | Config 1, 2, 3 | DLBWP.0.1 | | NA | |
| | Initial UL BWP | | | ULBWP.0.1 | | NA | |
| | Dedicated DL BWP | | | DLBWP.1.1 | | NA | |
| | Dedicated UL BWP | | | ULBWP.1.1 | | NA | |
| TRS configuration | | | Config 1 | TRS.1.1 FDD | | NA | |

| | | | | | | |
|---|--------------|--------------------|-------------|--------|-----------|--------|
| | | Config 2 | TRS.1.1 TDD | | NA | |
| | | Config 3 | TRS.1.2 TDD | | NA | |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | Config 1,2,3 | OP.1 | | OP.1 | |
| PDSCH Reference measurement channel | | Config 1 | SR.1.1 FDD | | - | |
| | | Config 2 | SR.1.1 TDD | | | |
| | | Config 3 | SR.2.1 TDD | | | |
| CORESET Reference Channel | | Config 1 | CR.1.1 FDD | | - | |
| | | Config 2 | CR.1.1 TDD | | | |
| | | Config 3 | CR.2.1 TDD | | | |
| SSB parameters | | Config 1 | SSB.1 FR1 | | SSB.5 FR1 | |
| | | Config 2 | SSB.1 FR1 | | SSB.5 FR1 | |
| | | Config 3 | SSB.2 FR1 | | SSB.6 FR1 | |
| SMTC configuration defined in A.3.11 | | Config 1 | SMTC.2 | | SMTC.5 | |
| | | Config 2, 3 | SMTC.1 | | SMTC.4 | |
| PDSCH/PDCCH subcarrier spacing | kHz | Config 1,2 | 15 | | | |
| | | Config 3 | 30 | | | |
| EPRE ratio of PSS to SSS | | Config 1,2,3 | 0 | | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | |
| N_{oc} ^{Note2} | dBm/15 kHz | | -98 | | -98 | |
| N_{oc} ^{Note2} | dBm/S CS | Config 1,2 | -98 | | -98 | |
| | | Config 3 | -95 | | -95 | |
| SS-RSRP ^{Note 3} | dBm/S CS | Config 1,2 | -94 | -94 | -Infinity | -91 |
| | | Config 3 | -91 | -91 | -Infinity | -88 |
| \hat{E}_s/I_{ot} | dB | Config 1,2,3,4,5,6 | 4 | 4 | -Infinity | 7 |
| \hat{E}_s/N_{oc} | dB | Config 1,2,3 | 4 | 4 | -Infinity | 7 |
| I_o ^{Note3} | dBm/9.36MHz | Config 1,2 | -64.59 | -64.59 | -70.05 | -62.26 |
| | dBm/38.16MHz | Config 3 | -58.49 | -58.49 | -63.94 | -56.15 |
| Propagation Condition | | Config 1,2,3 | AWGN | | AWGN | |

| | |
|---------|--|
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. |
| Note 3: | SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. |
| Note 4: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. |

A.6.6.2.1.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 760 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCCH.

A.6.6.2.2 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used

A.6.6.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.6.6.2.2.1-1, A.6.6.2.2.1-2 and A.6.6.2.2.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.6.6.2.2.1-2 is provided for UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #4 as defined in Table A.6.6.2.2.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.6.6.2.2.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

| Config | Description |
|--|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note 1: The UE is only required to be tested in one of the supported test configurations | |
| Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell | |

Table A.6.6.2.2.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

| Parameter | Unit | Test configuration | Value | | | | Comment |
|---|------|--------------------|-------------------|--------|--------|--------|---|
| | | | Test 1 | Test 2 | Test 3 | Test 4 | |
| NR RF Channel Number | | Config 1,2,3 | 1, 2 | | | | Two FR1 NR carrier frequencies is used. |
| Active cell | | Config 1,2,3 | NR cell 1 (Pcell) | | | | NR Cell 1 is on NR RF channel number 1. |
| Neighbour cell | | Config 1,2,3 | NR cell2 | | | | NR cell 2 is on NR RF channel number 2. |
| Gap Pattern Id | | Config 1,2,3 | 0 | | 4 | | As specified in clause 9.1.2-1. |
| Measurement gap offset | | Config 1,2,3 | 39 | | 9 | | |
| A3-Offset | dB | Config 1,2,3 | -6 | | | | |
| Hysteresis | dB | Config 1,2,3 | 0 | | | | |
| CP length | | Config 1,2,3 | Normal | | | | |
| TimeToTrigger | s | Config 1,2,3 | 0 | | | | |
| Filter coefficient | | Config 1,2,3 | 0 | | | | L3 filtering is not used |
| DRX | | Config 1,2,3 | DRX .1 | DRX .2 | DRX .1 | DRX .2 | As specified in clause A.3.3 |
| Time offset between serving and neighbour cells | | Config 1 | 3ms | | | | Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1. |
| | | Config 2,3 | 3μs | | | | Synchronous cells. |
| T1 | s | Config 1,2,3 | 5 | | | | |
| T2 | s | Config 1,2,3 | 1.1 | 11 | 1.1 | 11 | |

Table A.6.6.2.2.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

| Parameter | Unit | Test configuration | Cell 1 | | Cell 2 | |
|-----------|------|--------------------|--------|----|--------|----|
| | | | T1 | T2 | T1 | T2 |
| | | | | | | |

| NR RF Channel Number | | | Config 1,2,3 | 1 | 2 |
|---|------------------|-----|----------------|-----------------------------|-----------|
| Duplex mode | | | Config 1 | FDD | |
| | | | Config 2,3 | TDD | |
| TDD configuration | | | Config 1 | Not Applicable | |
| | | | Config 2 | TDDConf.1.1 | |
| | | | Config 3 | TDDConf.2.1 | |
| BW _{channel} | | MHz | Config 1,2 | 10: N _{RB,c} = 52 | |
| | | | Config 3 | 40: N _{RB,c} = 106 | |
| BWP BW | | MHz | Config 1,2 | 10: N _{RB,c} = 52 | |
| | | | Config 3 | 40: N _{RB,c} = 106 | |
| BWP configuration | Initial DL BWP | | Config 1, 2, 3 | DLBWP.0.1 | NA |
| | Initial UL BWP | | Config 1, 2, 3 | ULBWP.0.1 | NA |
| | Dedicated DL BWP | | | DLBWP.1.1 | NA |
| | Dedicated UL BWP | | | ULBWP.1.1 | NA |
| TRS configuration | | | Config 1 | TRS.1.1 FDD | NA |
| | | | Config 2 | TRS.1.1 TDD | NA |
| | | | Config 3 | TRS.1.2 TDD | NA |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | | Config 1,2,3 | OP.1 | OP.1 |
| PDSCH Reference measurement channel | | | Config 1 | SR.1.1 FDD | - |
| | | | Config 2 | SR.1.1 TDD | |
| | | | Config 3 | SR.2.1 TDD | |
| CORESET Reference Channel | | | Config 1 | CR.1.1 FDD | - |
| | | | Config 2 | CR.1.1 TDD | |
| | | | Config 3 | CR.2.1 TDD | |
| SSB parameters | | | Config 1 | SSB.1 FR1 | SSB.5 FR1 |
| | | | Config 2 | SSB.1 FR1 | SSB.5 FR1 |
| | | | Config 3 | SSB.2 FR1 | SSB.6 FR1 |
| SMTC configuration defined in A.3.11 | | | Config 1 | SMTC.2 | SMTC.5 |
| | | | Config 2, 3 | SMTC.1 | SMTC.4 |
| PDSCH/PDCCH subcarrier spacing | | kHz | Config 1,2 | 15 | |
| | | | Config 3 | 30 | |
| EPRE ratio of PSS to SSS | | | Config 1,2,3 | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | |
| N_{oc} ^{Note2} | dBm/15 kHz | | Config 1,2,3 | -98 | -98 |

| | | | | | | |
|--|------------------|-----------------------|--------|--------|-----------|--------|
| N_{oc} ^{Note2} | dBm/S CS | Config 1,2 | -98 | | -98 | |
| | | Config 3 | -95 | | -95 | |
| SS-RSRP ^{Note3} | dBm/S CS | Config 1,2 | -94 | -94 | -Infinity | -91 |
| | | Config 3 | -91 | -91 | -Infinity | -88 |
| \hat{E}_s/I_{ot} | dB | Config 1,2,3,4,5,6 | 4 | 4 | -Infinity | 7 |
| \hat{E}_s/N_{oc} | dB | Config 1,2,3 | 4 | 4 | -Infinity | 7 |
| I_o ^{Note3} | dBm/9. 36MHz | Config 1,2 | -64.59 | -64.59 | -70.05 | -62.2 |
| | dBm/38 .16MHz | Config 3 | -58.49 | -58.49 | -63.94 | -56.15 |
| Propagation Condition | | Config 1,2,3 | AWGN | | AWGN | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> | | | | | | |

Table A.6.6.2.2.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

| Field | Test1&3 | Test2&4 | Comment |
|---------------------------|---------|---------|---|
| | Value | Value | |
| drx-onDurationTimer | ms1 | ms1 | As specified in clause 6.3.2 in TS 38.331 [2] |
| drx-InactivityTimer | ms1 | ms1 | |
| drx-RetransmissionTimerDL | sl1 | sl1 | |
| drx-RetransmissionTimerUL | sl1 | sl1 | |
| drx-LongCycleStartOffset | ms40 | Ms640 | |
| shortDRX | disable | disable | |

Table A.6.6.2.2.1-5: TimeAlignmentTimer -Configuration SA inter-frequency event triggered reporting without SSB time index detection

| Field | Value | Comment |
|--------------------|-------|---|
| TimeAlignmentTimer | ms500 | As specified in clause 6.3.2 in TS 38.331 [2] |

A.6.6.2.2.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, 2, 3 and 4 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCCH.

A.6.6.2.3 Void

A.6.6.2.4 Void

A.6.6.2.5 SA event triggered reporting tests for FR1 with SSB time index detection when DRX is not used

A.6.6.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.6.6.2.5.1-1, A.6.6.2.5.1-2 and A.6.6.2.5.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.6.6.2.5.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.6.6.2.5.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.6.6.2.5.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR1

| Config | Description |
|---------|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note 1: | The UE is only required to be tested in one of the supported test configurations |
| Note 2: | target NR cell has the same SCS, BW and duplex mode as NR serving cell |

Table A.6.6.2.5.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

| Parameter | Unit | Test configuration | Value | | Comment |
|---|------|--------------------|-------------------|--------|---|
| | | | Test 1 | Test 2 | |
| NR RF Channel Number | | Config 1,2,3 | 1, 2 | | Two FR1 NR carrier frequencies is used. |
| Active cell | | Config 1,2,3 | NR cell 1 (Pcell) | | NR Cell 1 is on NR RF channel number 1. |
| Neighbour cell | | Config 1,2,3 | NR cell2 | | NR cell 2 is on NR RF channel number 2. |
| Gap Pattern Id | | Config 1,2,3 | 0 | 4 | As specified in clause 9.1.2-1. |
| Measurement gap offset | | Config 1,2,3 | 9 | 9 | |
| A3-Offset | dB | Config 1,2,3 | -6 | | |
| Hysteresis | dB | Config 1,2,3 | 0 | | |
| CP length | | Config 1,2,3 | Normal | | |
| TimeToTrigger | s | Config 1,2,3 | 0 | | |
| Filter coefficient | | Config 1,2,3 | 0 | | L3 filtering is not used |
| DRX | | Config 1,2,3 | OFF | | DRX is not used |
| Time offset between serving and neighbour cells | | Config 1 | 3ms | | Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1. |
| | | Config 2,3 | 3μs | | Synchronous cells. |
| T1 | s | Config 1,2,3 | 5 | | |
| T2 | s | Config 1,2,3 | 1.1 | 1 | |

Table A.6.6.2.5.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

| Parameter | | Unit | Test configuration n | Cell 1 | | Cell 2 | |
|---|------------------|------|----------------------|-----------------------------|-----|-----------|-----|
| | | | | T1 | T2 | T1 | T2 |
| NR RF Channel Number | | | Config 1,2,3 | 1 | | 2 | |
| Duplex mode | | | Config 1 | FDD | | | |
| | | | Config 2,3 | TDD | | | |
| TDD configuration | | | Config 1 | Not Applicable | | | |
| | | | Config 2 | TDDConf.1.1 | | | |
| | | | Config 3 | TDDConf.2.1 | | | |
| BW _{channel} | | MHz | Config 1,2 | 10: N _{RB,c} = 52 | | | |
| | | | Config 3 | 40: N _{RB,c} = 106 | | | |
| BWP BW | | MHz | Config 1,2 | 10: N _{RB,c} = 52 | | | |
| | | | Config 3 | 40: N _{RB,c} = 106 | | | |
| BWP configuration | Initial DL BWP | | Config 1, 2, 3 | DLBWP.0.1 | | NA | |
| | Initial UL BWP | | | ULBWP.0.1 | | NA | |
| | Dedicated DL BWP | | | DLBWP.1.1 | | NA | |
| | Dedicated UL BWP | | | ULBWP.1.1 | | NA | |
| TRS configuration | | | Config 1 | TRS.1.1 FDD | | NA | |
| | | | Config 2 | TRS.1.1 TDD | | NA | |
| | | | Config 3 | TRS.1.2 TDD | | NA | |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | | Config 1,2,3 | OP.1 | | OP.1 | |
| PDSCH Reference measurement channel | | | Config 1 | SR.1.1 FDD | | - | |
| | | | Config 2 | SR.1.1 TDD | | | |
| | | | Config 3 | SR.2.1 TDD | | | |
| CORESET Reference Channel | | | Config 1 | CR.1.1 FDD | | - | |
| | | | Config 2 | CR.1.1 TDD | | | |
| | | | Config 3 | CR.2.1 TDD | | | |
| SSB parameters | | | Config 1 | SSB.1 FR1 | | SSB.5 FR1 | |
| | | | Config 2 | SSB.1 FR1 | | SSB.5 FR1 | |
| | | | Config 3 | SSB.2 FR1 | | SSB.6 FR1 | |
| SMTC configuration defined in A.3.11 | | | Config 1 | SMTC.2 | | SMTC.5 | |
| | | | Config 2, 3 | SMTC.1 | | SMTC.4 | |
| PDSCH/PDCCH subcarrier spacing | | kHz | Config 1,2 | 15 | | | |
| | | | Config 3 | 30 | | | |
| EPRE ratio of PSS to SSS | | | Config 1,2,3 | 0 | | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | | |
| N_{oc} ^{Note2} | dBm/15 kHz | | | -98 | | -98 | |
| N_{oc} ^{Note2} | dBm/S CS | | Config 1,2 | -98 | | -98 | |
| | | | Config 3 | -95 | | -95 | |
| SS-RSRP ^{Note 3} | | | Config 1,2 | -94 | -94 | -Infinity | -91 |

| | | | | | | |
|------------------------|--|--------------|--------|--------|-----------|--------|
| | dBm/S CS | Config 3 | -91 | -91 | -Infinity | -88 |
| \hat{E}_s/I_{ot} | dB | Config 1,2,3 | 4 | 4 | -Infinity | 7 |
| \hat{E}_s/N_{oc} | dB | Config 1,2,3 | 4 | 4 | -Infinity | 7 |
| I_o ^{Note3} | dBm/9. 36MHz | Config 1,2 | -64.59 | -64.59 | -70.05 | -62.2 |
| | dBm/38 .16MHz | Config 3 | -58.4 | -58.49 | -63.94 | -56.15 |
| Propagation Condition | | Config 1,2,3 | AWGN | | AWGN | |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | |
| Note 3: | SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | |
| Note 4: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | | | |

A.6.6.2.5.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1040 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 880 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCC}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCC.

A.6.6.2.6 SA event triggered reporting tests for FR1 with SSB time index detection when DRX is used

A.6.6.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.6.6.2.6.1-1, A.6.6.2.6.1-2 and A.6.6.2.6.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.6.6.2.6.1-2 is provided for UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #4 as defined in Table A.6.6.2.6.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided at least once every 500 ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.6.6.2.6.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR1

| Config | Description |
|--|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note 1: The UE is only required to be tested in one of the supported test configurations | |
| Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell | |

Table A.6.6.2.6.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

| Parameter | Unit | Test configuration | Value | | | | Comment |
|---|------|--------------------|-------------------|--------|--------|--------|---|
| | | | Test 1 | Test 2 | Test 3 | Test 4 | |
| NR RF Channel Number | | Config 1,2,3 | 1, 2 | | | | Two FR1 NR carrier frequencies is used. |
| Active cell | | Config 1,2,3 | NR cell 1 (Pcell) | | | | NR Cell 1 is on NR RF channel number 1. |
| Neighbour cell | | Config 1,2,3 | NR cell2 | | | | NR cell 2 is on NR RF channel number 2. |
| Gap Pattern Id | | Config 1,2,3 | 0 | | 4 | | As specified in clause 9.1.2-1. |
| Measurement gap offset | | Config 1,2,3 | 39 | | 9 | | |
| A3-Offset | dB | Config 1,2,3 | -6 | | | | |
| Hysteresis | dB | Config 1,2,3 | 0 | | | | |
| CP length | | Config 1,2,3 | Normal | | | | |
| TimeToTrigger | s | Config 1,2,3 | 0 | | | | |
| Filter coefficient | | Config 1,2,3 | 0 | | | | L3 filtering is not used |
| DRX | | Config 1,2,3 | DRX .1 | DRX .2 | DRX .1 | DRX .2 | As specified in clause A.3.3 |
| Time offset between serving and neighbour cells | | Config 1 | 3 ms | | | | Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1. |
| | | Config 2,3 | 3 μ s | | | | Synchronous cells. |
| T1 | s | Config 1,2,3 | 5 | | | | |
| T2 | s | Config 1,2,3 | 1.3 | 13.5 | 1.3 | 13.5 | |

Table A.6.6.2.6.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

| Parameter | Unit | Test configuration | Cell 1 | | Cell 2 | |
|-----------|------|--------------------|--------|----|--------|----|
| | | | T1 | T2 | T1 | T2 |
| | | | | | | |

| | | | | | | |
|---|------------------|----------------|-----------------------------|-----|-----------|-----|
| NR RF Channel Number | | Config 1,2,3 | 1 | 2 | | |
| Duplex mode | | Config 1 | FDD | | | |
| | | Config 2,3 | TDD | | | |
| TDD configuration | | Config 1 | Not Applicable | | | |
| | | Config 2 | TDDConf.1.1 | | | |
| | | Config 3 | TDDConf.2.1 | | | |
| BW _{channel} | MHz | Config 1,2 | 10: N _{RB,c} = 52 | | | |
| | | Config 3 | 40: N _{RB,c} = 106 | | | |
| BWP BW | MHz | Config 1,2 | 10: N _{RB,c} = 52 | | | |
| | | Config 3 | 40: N _{RB,c} = 106 | | | |
| BWP configuration | Initial DL BWP | Config 1, 2, 3 | DLBWP.0.1 | | NA | |
| | Initial UL BWP | | ULBWP.0.1 | | NA | |
| | Dedicated DL BWP | | DLBWP.1.1 | | NA | |
| | Dedicated UL BWP | | ULBWP.1.1 | | NA | |
| TRS configuration | | Config 1 | TRS.1.1 FDD | | NA | |
| | | Config 2 | TRS.1.1 TDD | | NA | |
| | | Config 3 | TRS.1.2 TDD | | NA | |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | Config 1,2,3 | OP.1 | | OP.1 | |
| PDSCH Reference measurement channel | | Config 1 | SR.1.1 FDD | | - | |
| | | Config 2 | SR.1.1 TDD | | | |
| | | Config 3 | SR2.1 TDD | | | |
| CORESET Reference Channel | | Config 1 | CR.1.1 FDD | | - | |
| | | Config 2 | CR.1.1 TDD | | | |
| | | Config 3 | CR2.1 TDD | | | |
| SSB parameters | | Config 1 | SSB.1 FR1 | | SSB.5 FR1 | |
| | | Config 2 | SSB.1 FR1 | | SSB.5 FR1 | |
| | | Config 3 | SSB.2 FR1 | | SSB.6 FR1 | |
| SMTC configuration defined in A.3.11 | | Config 1 | SMTC.2 | | SMTC.5 | |
| | | Config 2, 3 | SMTC.1 | | SMTC.4 | |
| PDSCH/PDCCH subcarrier spacing | kHz | Config 1,2 | 15 | | | |
| | | Config 3 | 30 | | | |
| EPRE ratio of PSS to SSS | | Config 1,2,3 | 0 | | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | |
| N_{oc} ^{Note2} | dBm/15 kHz | | -98 | | -98 | |
| N_{oc} ^{Note2} | dBm/S CS | Config 1,2 | -98 | | -98 | |
| | | Config 3 | -95 | | -95 | |
| SS-RSRP ^{Note 3} | dBm/S CS | Config 1,2 | -94 | -94 | -Infinity | -91 |
| | | Config 3 | -91 | -91 | -Infinity | -88 |

| | | | | | | |
|------------------------|--|--------------|--------|--------|-----------|--------|
| \hat{E}_s / I_{ot} | dB | Config 1,2,3 | 4 | 4 | -Infinity | 7 |
| \hat{E}_s / N_{oc} | dB | Config 1,2,3 | 4 | 4 | -Infinity | 7 |
| I_o ^{Note3} | dBm/9.36MHz | Config 1,2 | -64.59 | -64.59 | -70.05 | -62.26 |
| | dBm/38.16MHz | Config 3 | -58.49 | -58.49 | -63.94 | -56.15 |
| Propagation Condition | | Config 1,2,3 | AWGN | | AWGN | |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | |
| Note 3: | SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | |
| Note 4: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | | | |

A.6.6.2.6.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 13440 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 13440 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, 2, 3 and 4 UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCC}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCC.

A.6.6.2.7 Void

A.6.6.2.8 Void

A.6.6.3 Inter-RAT Measurements

A.6.6.3.1 SA NR - E-UTRAN event-triggered reporting in non-DRX in FR1

A.6.6.3.1.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements when operating in standalone (SA) operation with PCell in FR1. This test shall partly verify the cell search and measurement requirements in Clauses 9.4.2 and 9.4.3.

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN inter-RAT neighbour cell. In the measurement control information from the PCell it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2.

Supported test configurations are shown in table A.6.6.3.1.1-1. General test parameters are provided in Table A.6.6.3.1.1-2 below. Test parameters for Cell 1 and Cell 2, valid for both time duration T1 and T2, are provided in Tables A.6.6.3.1.1-3 and A.6.6.3.1.1-4, respectively.

Table A.6.6.3.1.1-1: Supported test configurations in SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

| Configuration | Description |
|---------------|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD |
| 4 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD |
| 5 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD |
| 6 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.6.6.3.1.1-2: General test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

| Parameter | Unit | Value | Comment |
|---|------|---|--|
| NR RF Channel Number | | 1 | 1 NR carrier frequency is used in the test |
| LTE RF Channel Number | | 1 | 1 LTE carrier frequency is used in the test |
| Channel Bandwidth | MHz | As specified in Tables A.6.6.3.1.1-2 and A.6.6.3.1.1-3. | |
| Active cell | | Cell 1 | Cell 1 is on RF channel number 1 |
| Neighbour cell | | Cell 2 | Cell 2 is on RF channel number 2 |
| Gap Pattern Id | | 0 | As specified in Clause Table 9.1.2-1. Per-UE gap pattern. |
| NR measurement quantity | | SS-RSRP | Measurement quantity for Cell 1 |
| Inter-RAT E-UTRAN measurement quantity | | RSRP | Measurement quantity for Cell 2 |
| b2-Threshold1 | dBm | Note 1 | SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2 |
| b2-Threshold2EUTRA | dBm | -97 | E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2 |
| Hysteresis | dB | 0 | |
| TimeToTrigger | s | 0 | |
| Filter coefficient | | 0 | L3 filtering is not used |
| DRX | | OFF | OFF |
| T1 | s | 5 | |
| T2 | s | 5 | |
| Note 1: Values are defined in Table A.6.6.3.1.1-3 | | | |

Table A.6.6.3.1.1-3: PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in non-DRX with PCell in FR1

| Parameter | | Unit | Configuration | Cell 1 | |
|-------------------------------------|------------------|------|------------------|-----------------------------------|----|
| | | | | T1 | T2 |
| RF channel number | | | 1, 2, 3, 4, 5, 6 | 1 | |
| Duplex mode | | | 1, 2, 3 | FDD | |
| | | | 4, 5, 6 | TDD | |
| TDD Configuration | SCS=15 KHz | | 2, 5 | TDDConf.1.1 | |
| | SCS=30 KHz | | 3, 6 | TDDConf.1.2 | |
| BW _{channel} | | MHz | 1, 4 | 10: N _{RB,c} = 52 (FDD) | |
| | | | 2, 5 | 10: N _{RB,c} = 52 (TDD) | |
| | | | 3, 6 | 40: N _{RB,c} = 106 (TDD) | |
| PDSCH reference measurement channel | | | 1, 4 | SR.1.1 FDD | |
| | | | 2, 5 | SR.1.1 TDD | |
| | | | 3, 6 | SR.2.1 TDD | |
| CORSET reference channel | | | 1, 4 | CR.1.1 FDD | |
| | | | 2, 5 | CR.1.1 TDD | |
| | | | 3, 6 | CR.2.1 TDD | |
| BWP configurations | Initial DL BWP | | 1, 2, 3, 4, 5, 6 | DLBWP.0.1 | |
| | Dedicated DL BWP | | 1, 2, 3, 4, 5, 6 | DLBWP.1.1 | |
| | Initial UL BWP | | 1, 2, 3, 4, 5, 6 | ULBWP.0.1 | |
| | Dedicated UL BWP | | 1, 2, 3, 4, 5, 6 | ULBWP.1.1 | |
| OCNG pattern ^{Note1} | | | 1, 2, 3, 4, 5, 6 | OP.1 | |
| SMTTC configuration | | | 1, 2, 3, 4, 5, 6 | SMTTC.1 | |
| SSB configuration | | | 1, 2, 4, 5 | SSB.1 FR1 | |
| | | | 3, 6 | SSB.2 FR1 | |
| b2-Threshold1 | | dBm | 1, 2, 4, 5 | -98 | |
| | | | 3, 6 | -95 | |
| EPRE ratio of PSS to SSS | | dB | 1, 2, 3, 4, 5, 6 | 0 | |

| | | | | |
|--|---------------|------------------|---------|--------|
| EPRE ratio of PBCH_DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | | |
| EPRE ratio of OCNG DMRS to SSS | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | | | |
| N_{oc}^{Note2} | dBm/15 KHz | 1, 2, 3, 4, 5, 6 | | -106 |
| N_{oc}^{Note2} | dBm/SCS | 1, 2, 4, 5 | | -106 |
| | | 3, 6 | | -103 |
| \bar{E}_s/N_{oc} | dB | 1, 2, 3, 4, 5, 6 | 18 | -2 |
| \bar{E}_s/I_{ot}^{Note3} | dB | 1, 2, 3, 4, 5, 6 | 18 | -2 |
| SS-RSRP ^{Note3} | dBm/SCS | 1, 2, 4, 5 | -88 | -108 |
| | | 3, 6 | -85 | -105 |
| SSB_RP ^{Note3} | dBm/SCS | 1, 2, 4, 5 | -88 | -108 |
| | | 3, 6 | -85 | -105 |
| I_o^{Note3} | dBm/9.36 MHz | 1, 2, 4, 5 | -59.98 | -75.92 |
| | dBm/38.16 MHz | 3, 6 | -53.88 | -69.82 |
| Propagation condition | | 1, 2, 3, 4, 5, 6 | ETDLA30 | |
| Antenna Configuration and Correlation Matrix | | 1, 2, 3, 4, 5, 6 | 1x2 Low | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: \bar{E}_s/I_{ot}, SS-RSRP, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | |

Table A.6.6.3.1.1-4: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

| Parameter | Unit | Configuration | Cell 2 | |
|--|------|------------------|---|----|
| | | | T1 | T2 |
| RF channel number | | 1, 2, 3, 4, 5, 6 | 1 | |
| Duplex mode | | 1, 2, 3 | FDD | |
| | | 4, 5, 6 | TDD | |
| TDD special subframe configuration ^{Note1} | | 4, 5, 6 | 6 | |
| TDD uplink-downlink configuration ^{Note1} | | 4, 5, 6 | 1 | |
| BW _{channel} | MHz | 1, 2, 3, 4, 5, 6 | 5 MHz: $N_{RB,c} = 25$ 10 MHz: $N_{RB,c} = 50$ 20 MHz: $N_{RB,c} = 100$ | |
| PDSCH parameters: DL Reference Measurement Channel ^{Note2} | | 1, 2, 3 | 5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD | |
| | | 4, 5, 6 | 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD | |
| PCFICH/PDCCH/PHICH parameters: | | 1, 2, 3 | 5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD | |

| | | | | |
|---|-----------|------------------|--|------------------------------|
| DL Reference Measurement Channel ^{Note2} | | 4, 5, 6 | 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD | |
| OCNG Patterns ^{Note2} | | 1, 2, 3 | 5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD | |
| | | 4, 5, 6 | 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD | |
| PBCH_RA | dB | 1, 2, 3, 4, 5, 6 | 0 | |
| PBCH_RB | | | | |
| PSS_RA | | | | |
| SSS_RA | | | | |
| PCFICH_RB | | | | |
| PHICH_RA | | | | |
| PHICH_RB | | | | |
| PDCCH_RA | | | | |
| PDCCH_RB | | | | |
| PDSCH_RA | | | | |
| PDSCH_RB | | | | |
| OCNG_RA ^{Note3} | | | | |
| OCNG_RB ^{Note3} | | | | |
| N_{oc} ^{Note4} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -106 | |
| \hat{E}_s/N_{oc} | dB | 1, 2, 3, 4, 5, 6 | -Infinity | 19 |
| \hat{E}_s/I_{ot} ^{Note5} | dB | 1, 2, 3, 4, 5, 6 | -Infinity | 19 |
| RSRP ^{Note5} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -Infinity | -87 |
| SCH_RP ^{Note5} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -Infinity | -87 |
| I_o ^{Note5} | dBm/9MHz | 1, 2, 3, 4, 5, 6 | $-78.22+10\log(N_{RB,c}/50)$ | $-59.16+10\log(N_{RB,c}/50)$ |
| Propagation Condition | | 1, 2, 3, 4, 5, 6 | ETU70 | |
| Antenna Configuration and Correlation Matrix | | 1, 2, 3, 4, 5, 6 | 1x2 Low | |
| <p>Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].</p> <p>Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.</p> <p>Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 5: \hat{E}_s/I_{ot}, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | |

A.6.6.3.1.2 Test Requirements

The UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3.84s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.3.2 SA NR - E-UTRAN event-triggered reporting in DRX in FR1

A.6.6.3.2.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements when operating in standalone (SA) operation with PCell in FR1 when DRX is used. This test shall partly verify the cell search and measurement requirements in Clauses 9.4.2 and 9.4.3. There are two test

cases. In test 1 the UE shall be configured with DRX cycle of 40 ms. In test 2 the UE shall be configured with DRX cycle of 640 ms.

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN inter-RAT neighbour cell. In the measurement control information from the PCell it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2.

In each test the UE shall be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore the UE shall be allocated with PUSCH resource at every DRX cycle.

Supported test configurations are shown in table A.6.6.3.2.1-1. General test parameters are provided in Table A.6.6.3.2.1-2 below. Test parameters for Cell 1 and Cell 2, valid for both time duration T1 and T2, are provided in Tables A.6.6.3.2.1-3 and A.6.6.3.2.1-4, respectively.

Table A.6.6.3.2.1-1: Supported test configurations in SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

| Configuration | Description |
|---------------|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD |
| 4 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD |
| 5 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD |
| 6 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.6.6.3.2.1-2: General test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

| Parameter | Unit | Test 1 | | Test 2 | | Comment |
|--|------|---|-------|--------|--|---|
| | | Value | | | | |
| NR RF Channel Number | | 1 | | | | 1 NR carrier frequency is used in the test |
| LTE RF Channel Number | | 2 | | | | 1 LTE carrier frequency is used in the test |
| Channel Bandwidth | MHz | As specified in Tables A.6.6.3.2.1-2 and A.6.6.3.2.1-3. | | | | |
| Active cell | | Cell 1 | | | | Cell 1 is on RF channel number 1 |
| Neighbour cell | | Cell 2 | | | | Cell 2 is on RF channel number 2 |
| Gap Pattern Id | | 0 | | | | As specified in Clause Table 9.1.2-1. Per-UE gap pattern. |
| NR measurement quantity | | SS-RSRP | | | | Measurement quantity for Cell 1 |
| Inter-RAT E-UTRAN measurement quantity | | RSRP | | | | Measurement quantity for Cell 2 |
| b2-Threshold1 | dBm | Note 1 | | | | SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2 |
| b2-Threshold2EUTRA | dBm | -97 | | | | E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2 |
| Hysteresis | dB | 0 | | | | |
| TimeToTrigger | s | 0 | | | | |
| Filter coefficient | | 0 | | | | L3 filtering is not used |
| DRX | | DRX.1 | DRX.2 | | | DRX cycle configurations DRX.1 and DRX.2 are defined in Table A.3.3.1-1 and Table A.3.3.2-1 respectively. |
| T1 | s | 5 | | | | |
| T2 | s | 5 | 15 | | | |

Note 1: Values are defined in Table A.6.6.3.2.1-3

Table A.6.6.3.2.1-3: PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in DRX with PCell in FR1

| Parameter | | Unit | Configuration | Cell 1 | |
|-------------------------------------|------------------|------|------------------|-----------------------------------|----|
| | | | | T1 | T2 |
| RF channel number | | | 1, 2, 3, 4, 5, 6 | 1 | |
| Duplex mode | | | 1, 2, 3 | FDD | |
| | | | 4, 5, 6 | TDD | |
| TDD Configuration | SCS=15 KHz | | 2, 5 | TDDConf.1.1 | |
| | SCS=30 KHz | | 3, 6 | TDDConf.2.1 | |
| BW _{channel} | | MHz | 1, 4 | 10: N _{RB,c} = 52 (FDD) | |
| | | | 2, 5 | 10: N _{RB,c} = 52 (TDD) | |
| | | | 3, 6 | 40: N _{RB,c} = 106 (TDD) | |
| PDSCH reference measurement channel | | | 1, 4 | SR.1.1 FDD | |
| | | | 2, 5 | SR.1.1 TDD | |
| | | | 3, 6 | SR.2.1 TDD | |
| CORSET reference channel | | | 1, 4 | CR.1.1 FDD | |
| | | | 2, 5 | CR.1.1 TDD | |
| | | | 3, 6 | CR.2.1 TDD | |
| BWP configurations | Initial DL BWP | | 1, 2, 3, 4, 5, 6 | DLBWP.0.1 | |
| | Dedicated DL BWP | | 1, 2, 3, 4, 5, 6 | DLBWP.1.1 | |
| | Initial UL BWP | | 1, 2, 3, 4, 5, 6 | ULBWP.0.1 | |
| | Dedicated UL BWP | | 1, 2, 3, 4, 5, 6 | ULBWP.1.1 | |
| OCNG pattern ^{Note1} | | | 1, 2, 3, 4, 5, 6 | OP.1 | |
| SMTc configuration | | | 1, 2, 3, 4, 5, 6 | SMTc.1 | |
| SSB configuration | | | 1, 2, 4, 5 | SSB.1 FR1 | |
| | | | 3, 6 | SSB.2 FR1 | |
| b2-Threshold1 | | dBm | 1, 2, 4, 5 | -98 | |

| | | | | |
|--|---------------|------------------|---------|--------|
| | | 3, 6 | -95 | |
| EPRE ratio of PSS to SSS | dB | 1, 2, 3, 4, 5, 6 | 0 | |
| EPRE ratio of PBCH_DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | | |
| EPRE ratio of OCNG DMRS to SSS | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | | | |
| N_{oc}^{Note2} | dBm/15 KHz | 1, 2, 3, 4, 5, 6 | -106 | |
| N_{oc}^{Note2} | dBm/SCS | 1, 2, 4, 5 | -106 | |
| | | 3, 6 | -103 | |
| \hat{E}_s/N_{oc} | dB | 1, 2, 3, 4, 5, 6 | 18 | -2 |
| \hat{E}_s/I_{ot}^{Note3} | dB | 1, 2, 3, 4, 5, 6 | 18 | -2 |
| SS-RSRP ^{Note3} | dBm/SCS | 1, 2, 4, 5 | -88 | -108 |
| | | 3, 6 | -85 | -105 |
| SSB_RP ^{Note3} | dBm/SCS | 1, 2, 4, 5 | -88 | -108 |
| | | 3, 6 | -85 | -105 |
| I_o^{Note3} | dBm/9.36 MHz | 1, 2, 4, 5 | -59.98 | -75.92 |
| | dBm/38.16 MHz | 3, 6 | -53.88 | -69.82 |
| Propagation condition | | 1, 2, 3, 4, 5, 6 | ETDLA30 | |
| Antenna Configuration and Correlation Matrix | | 1, 2, 3, 4, 5, 6 | 1x2 Low | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: \hat{E}_s/I_{ot}, SS-RSRP, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | |

Table A.6.6.3.2.1-4: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

| Parameter | Unit | Configuration | Cell 2 | |
|---|------|------------------|---|----|
| | | | T1 | T2 |
| RF channel number | | 1, 2, 3, 4, 5, 6 | 2 | |
| Duplex mode | | 1, 2, 3 | FDD | |
| | | 4, 5, 6 | TDD | |
| TDD special subframe configuration ^{Note1} | | 4, 5, 6 | 6 | |
| TDD uplink-downlink configuration ^{Note1} | | 4, 5, 6 | 1 | |
| BW _{channel} | MHz | 1, 2, 3, 4, 5, 6 | 5 MHz: $N_{RB,c} = 25$ 10 MHz: $N_{RB,c} = 50$ 20 MHz: $N_{RB,c} = 100$ | |
| PDSCH parameters: DL Reference Measurement Channel ^{Note2} | | 1, 2, 3 | 5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD | |
| | | 4, 5, 6 | 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD | |

| | | | | |
|--|-----------|------------------|--|------------------------------|
| PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2} | | 1, 2, 3 | 5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD | |
| | | 4, 5, 6 | 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD | |
| OCNG Patterns ^{Note2} | | 1, 2, 3 | 5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD | |
| | | 4, 5, 6 | 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD | |
| PBCH_RA | dB | 1, 2, 3, 4, 5, 6 | 0 | |
| PBCH_RB | | | | |
| PSS_RA | | | | |
| SSS_RA | | | | |
| PCFICH_RB | | | | |
| PHICH_RA | | | | |
| PHICH_RB | | | | |
| PDCCH_RA | | | | |
| PDCCH_RB | | | | |
| PDSCH_RA | | | | |
| PDSCH_RB | | | | |
| OCNG_RA ^{Note3} | | | | |
| OCNG_RB ^{Note3} | | | | |
| N_{oc} ^{Note4} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -106 | |
| \hat{E}_s/N_{oc} | dB | 1, 2, 3, 4, 5, 6 | -Infinity | 19 |
| \hat{E}_s/I_{ot} ^{Note5} | dB | 1, 2, 3, 4, 5, 6 | -Infinity | 19 |
| RSRP ^{Note5} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -Infinity | -87 |
| SCH_RP ^{Note5} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -Infinity | -87 |
| I_o ^{Note5} | dBm/9MHz | 1, 2, 3, 4, 5, 6 | $-78.22+10\log(N_{RB,c}/50)$ | $-59.16+10\log(N_{RB,c}/50)$ |
| Propagation Condition ^{Note6} | | 1, 2, 3, 4, 5, 6 | ETU70 | |
| Antenna Configuration and Correlation Matrix ^{Note6} | | 1, 2, 3, 4, 5, 6 | 1x2 Low | |
| <p>Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].</p> <p>Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.</p> <p>Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 5: \hat{E}_s/I_{ot}, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].</p> | | | | |

A.6.6.3.2.2 Test Requirements

In test 1, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3.84s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

In test 2, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 12.8s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.4 L1-RSRP measurement for beam reporting

A.6.6.4.1 SSB based L1-RSRP measurement when DRX is not used

A.6.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.6.6.4.1.1-1.

Table A.6.6.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

| Config | Description |
|--------|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

A.6.6.4.1.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.6.4.1.2-1 and Table A.6.6.4.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.6.6.4.1.2-1: General test parameters

| Parameter | Config | Unit | Value |
|-------------------------------------|--------|------|-----------------------------|
| SSB GSCN | 1~3 | | freq1 |
| Duplex mode | 1 | | FDD |
| | 2 | | TDD |
| | 3 | | TDD |
| TDD Configuration | 1 | | N/A |
| | 2 | | TDDConf.1.1 |
| | 3 | | TDDConf.2.1 |
| BW _{channel} | 1 | MHz | 10: N _{RB,c} = 52 |
| | 2 | | 10: N _{RB,c} = 52 |
| | 3 | | 40: N _{RB,c} = 106 |
| PDSCH Reference measurement channel | 1 | | SR.1.1 FDD |
| | 2 | | SR.1.1 TDD |
| | 3 | | SR.2.1 TDD |
| RMSI CORESET Reference Channel | 1 | | CR.1.1 FDD |
| | 2 | | CR.1.1 TDD |
| | 3 | | CR.2.1 TDD |
| Dedicated CORESET Reference Channel | 1 | | CCR.1.1 FDD |
| | 2 | | CCR.1.1 TDD |
| | 3 | | CCR.2.1 TDD |
| SSB configuration | 1 | | SSB.3 FR1 |
| | 2 | | SSB.3 FR1 |
| | 3 | | SSB.4 FR1 |

| | | | |
|---|-----|------|------------------------|
| OCNG Patterns | 1~3 | | OP.1 |
| Initial BWP Configuration | 1~3 | | DLBWP.0.1 ULBWP.0.1 |
| Dedicated BWP configuration | 1~3 | | DLBWP.1.1 ULBWP.1.1 |
| SMTC configuration | 1~3 | | SMTC.1 |
| TRS Configuration | 1 | | TRS.1.1 FDD |
| | 2 | | TRS.1.1 TDD |
| | 3 | | TRS.1.2 TDD |
| DRX configuration | 1~3 | | Off |
| reportConfigType | 1~3 | | periodic |
| reportQuantity | 1~3 | | ssb-Index-RSRP |
| Number of reported RS | 1~3 | | 2 |
| L1-RSRP reporting period | 1~3 | slot | 80 |
| T1 | 1~3 | s | 5 |
| T2 | 1~3 | s | 1 |
| EPRE ratio of PSS to SSS | 1~3 | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | |
| Propagation condition | | | |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |

Table A.6.6.4.1.2-2: SSB specific test parameters

| Parameter | Config | Unit | SSB#0 | | SSB#1 | |
|---------------------------|--------|---------------|--------|--------|-----------|--------|
| | | | T1 | T2 | T1 | T2 |
| N_{oc} ^{Note2} | 1~3 | dBm/15kHz | -94.65 | | | |
| N_{oc} ^{Note2} | 1,2 | dBm/SSB SCS | -94.65 | | | |
| | 3 | | -91.65 | | | |
| \hat{E}_s/I_{ot} | 1~3 | dB | 0 | 0 | -Infinity | 3 |
| SSB RSRP ^{Note3} | 1,2 | dBm/SSB SCS | -94.65 | -94.65 | -Infinity | -91.65 |
| | 3 | | -91.65 | -91.65 | -Infinity | -88.65 |
| I_o ^{Note3} | 1,2 | dBm/9.36 MHz | -63.69 | -63.69 | -66.70 | -61.93 |
| | 3 | dBm/38.16 MHz | -57.59 | -57.59 | -60.61 | -55.84 |

| | | | | | | |
|--|-----|----|---|---|-----------|---|
| \hat{E}_s / N_{oc} | 1~3 | dB | 0 | 0 | -Infinity | 3 |
| <p>Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | |

A.6.6.4.1.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.4.2 SSB based L1-RSRP measurement when DRX is used

A.6.6.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.6.6.4.2.1-1.

Table A.6.6.4.2.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

| Config | Description |
|--|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations | |

A.6.6.4.2.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.6.4.2.2-1 and Table A.6.6.4.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.6.6.4.2.2-1: General test parameters

| Parameter | Config | Unit | Value |
|-------------|--------|------|-------|
| SSB GSCN | 1~3 | | freq1 |
| Duplex mode | 1 | | FDD |
| | 2 | | TDD |
| | 3 | | TDD |

| | | | |
|---|-----|------|-----------------------------|
| TDD Configuration | 1 | | N/A |
| | 2 | | TDDConf.1.1 |
| | 3 | | TDDConf.2.1 |
| BW _{channel} | 1 | MHz | 10: N _{RB,c} = 52 |
| | 2 | | 10: N _{RB,c} = 52 |
| | 3 | | 40: N _{RB,c} = 106 |
| PDSCH Reference measurement channel | 1 | | SR.1.1 FDD |
| | 2 | | SR.1.1 TDD |
| | 3 | | SR.2.1 TDD |
| RMSI CORESET Reference Channel | 1 | | CR.1.1 FDD |
| | 2 | | CR.1.1 TDD |
| | 3 | | CR.2.1 TDD |
| Dedicated CORESET Reference Channel | 1 | | CCR.1.1 FDD |
| | 2 | | CCR.1.1 TDD |
| | 3 | | CCR.2.1 TDD |
| SSB configuration | 1 | | SSB.3 FR1 |
| | 2 | | SSB.3 FR1 |
| | 3 | | SSB.4 FR1 |
| OCNG Patterns | 1~3 | | OP.1 |
| Initial BWP Configuration | 1~3 | | DLBWP.0.1 ULBWP.0.1 |
| Dedicated BWP configuration | 1~3 | | DLBWP.1.1 ULBWP.1.1 |
| SMTC configuration | 1~3 | | SMTC.1 |
| TRS Configuration | 1 | | TRS.1.1 FDD |
| | 2 | | TRS.1.1 TDD |
| | 3 | | TRS.1.2 TDD |
| DRX configuration | 1~3 | | DRX.3 |
| reportConfigType | 1~3 | | periodic |
| reportQuantity | 1~3 | | ssb-Index-RSRP |
| Number of reported RS | 1~3 | | 2 |
| L1-RSRP reporting period | 1~3 | slot | 80 |
| T1 | 1~3 | s | 5 |
| T2 | 1~3 | s | 1 |
| EPRE ratio of PSS to SSS | 1~3 | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | |
| Propagation condition | | | |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |

Table A.6.6.4.2.2-2: SSB specific test parameters

| Parameter | Config | Unit | SSB#0 | | SSB#1 | |
|--|--------|---------------|--------|--------|-----------|--------|
| | | | T1 | T2 | T1 | T2 |
| N_{oc} ^{Note2} | 1~3 | dBm/15kHz | -94.65 | | | |
| N_{oc} ^{Note2} | 1,2 | dBm/SSB SCS | -94.65 | | | |
| | 3 | | -91.65 | | | |
| \hat{E}_s/I_{ot} | 1~3 | dB | 0 | 0 | -Infinity | 3 |
| SSB RSRP ^{Note3} | 1,2 | dBm/SSB SCS | -94.65 | -94.65 | -Infinity | -91.65 |
| | 3 | | -91.65 | -91.65 | -Infinity | -88.65 |
| I_o ^{Note3} | 1,2 | dBm/9.36 MHz | -63.69 | -63.69 | -66.70 | -61.93 |
| | 3 | dBm/38.16 MHz | -57.59 | -57.59 | -60.61 | -55.84 |
| \hat{E}_s/N_{oc} | 1~3 | dB | 0 | 0 | -Infinity | 3 |
| <p>Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | |

A.6.6.4.2.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCC}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCC.

A.6.6.4.3 CSI-RS based L1-RSRP measurement when DRX is not used

A.6.6.4A.6.6.4.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells in Table A.6.6.4.3.1-1.

Table A.6.6.4.3.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

| Config | Description |
|--|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations | |

A.6.6.4.3.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.6.4.3.2-1 and Table A.6.6.4.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (1 Config 1,2 and 8 for Config 3) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.6.6.4.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.6.6.4.3.2-1: General test parameters

| Parameter | Config | Unit | Value |
|-------------------------------------|--------|------|-----------------------------|
| SSB GSCN | 1~3 | | freq1 |
| Duplex mode | 1 | | FDD |
| | 2 | | TDD |
| | 3 | | TDD |
| TDD Configuration | 1 | | N/A |
| | 2 | | TDDConf.1.1 |
| | 3 | | TDDConf.2.1 |
| BW _{channel} | 1 | MHz | 10: N _{RB,c} = 52 |
| | 2 | | 10: N _{RB,c} = 52 |
| | 3 | | 40: N _{RB,c} = 106 |
| PDSCH Reference measurement channel | 1 | | SR.1.1 FDD |
| | 2 | | SR.1.1 TDD |
| | 3 | | SR.2.1 TDD |
| RMSI CORESET Reference Channel | 1 | | CR.1.1 FDD |
| | 2 | | CR.1.1 TDD |
| | 3 | | CR.2.1 TDD |
| Dedicated CORESET Reference Channel | 1 | | CCR.1.1 FDD |
| | 2 | | CCR.1.1 TDD |
| | 3 | | CCR.2.1 TDD |
| SSB configuration | 1 | | SSB.3 FR1 |
| | 2 | | SSB.3 FR1 |
| | 3 | | SSB.4 FR1 |
| CSI-RS configuration | 1 | | CSI-RS 1.3 FDD |
| | 2 | | CSI-RS 1.3 TDD |
| | 3 | | CSI-RS 2.3 TDD |
| OCNG Patterns | 1~3 | | OP.1 |
| TRS Configuration | 1 | | TRS.1.1 FDD |
| | 2 | | TRS.1.1 TDD |
| | 3 | | TRS.1.2 TDD |

| | | | |
|---|-----|-------|------------------------|
| Initial BWP Configuration | 1~3 | | DLBWP.0.1 ULBWP.0.1 |
| Dedicated BWP configuration | 1~3 | | DLBWP.1.1 ULBWP.1.1 |
| SMTC configuration | 1~3 | | SMTC.1 |
| DRX configuration | 1~3 | | Off |
| reportConfigType | 1~3 | | aperiodic |
| reportQuantity | 1~3 | | cri-RSRP |
| Number of reported RS | 1~3 | | 2 |
| qcl-Info | 1~3 | | SSB#0 for resource#0 |
| | | | SSB#1 for resource#1 |
| reportSlotOffsetList | 1~3 | slots | 26 |
| T1 | 1~3 | s | 5 |
| EPRE ratio of PSS to SSS | 1~3 | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | |
| Propagation condition | 1~3 | | AWGN |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |

Table A.6.6.4.3.2-2: CSI-RS specific test parameters

| Parameter | Config | Unit | CSI-RS#0 | CSI-RS#1 |
|---------------------------------|--------|---------------|----------|----------|
| N_{oc} ^{Note1} | 1~3 | dBm/15kHz | -94.65 | |
| N_{oc} ^{Note1} | 1,2 | dBm/SSB SCS | -94.65 | |
| | 3 | | -91.65 | |
| \hat{E}_s/I_{ot} | 1~3 | dB | 0 | 3 |
| CSI-RS RSRP ^{Note2} | 1,2 | dBm/SSB SCS | -94.65 | -91.65 |
| | 3 | | -91.65 | -88.65 |
| I_o ^{Note2} | 1,2 | dBm/9.36 MHz | -63.69 | -61.93 |
| | 3 | dBm/38.16 MHz | -57.59 | -55.84 |

| | | | | |
|--|-----|----|---|---|
| \hat{E}_s / N_{oc} | 1~3 | dB | 0 | 3 |
| <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | |

A.6.6.4.3.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 26 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause 10.1.20.1.1 and relative accuracy requirement in clause 10.1.20.1.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.4.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells in Table A.6.6.4.4.1-1.

Table A.6.6.4.4.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

| Config | Description |
|--|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations | |

A.6.6.4.4.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.6.4.4.2-1 and Table A.6.6.4.4.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (1 Config 1,2 and 8 for Config 3) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.6.6.4.4.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.6.6.4.4.2-1: General test parameters

| Parameter | Config | Unit | Value |
|-------------|--------|------|-------|
| SSB GSCN | 1~3 | | freq1 |
| Duplex mode | 1 | | FDD |
| | 2 | | TDD |
| | 3 | | TDD |

| | | | |
|-------------------------------------|-----|-----|-----------------------------|
| TDD Configuration | 1 | | N/A |
| | 2 | | TDDConf.1.1 |
| | 3 | | TDDConf.2.1 |
| BW _{channel} | 1 | MHz | 10: N _{RB,c} = 52 |
| | 2 | | 10: N _{RB,c} = 52 |
| | 3 | | 40: N _{RB,c} = 106 |
| PDSCH Reference measurement channel | 1 | | SR.1.1 FDD |
| | 2 | | SR.1.1 TDD |
| | 3 | | SR.2.1 TDD |
| RMSI CORESET Reference Channel | 1 | | CR.1.1 FDD |
| | 2 | | CR.1.1 TDD |
| | 3 | | CR.2.1 TDD |
| Dedicated CORESET Reference Channel | 1 | | CCR.1.1 FDD |
| | 2 | | CCR.1.1 TDD |
| | 3 | | CCR.2.1 TDD |
| SSB configuration | 1 | | SSB.3 FR1 |
| | 2 | | SSB.3 FR1 |
| | 3 | | SSB.4 FR1 |
| CSI-RS configuration | 1 | | CSI-RS 1.3 FDD |
| | 2 | | CSI-RS 1.3 TDD |
| | 3 | | CSI-RS 2.3 TDD |
| OCNG Patterns | 1~3 | | OP.1 |
| TRS Configuration | 1 | | TRS.1.1 FDD |
| | 2 | | TRS.1.1 TDD |
| | 3 | | TRS.1.2 TDD |
| Initial BWP Configuration | 1~3 | | DLBWP.0.1 ULBWP.0.1 |
| Dedicated BWP configuration | 1~3 | | DLBWP.1.1 ULBWP.1.1 |
| SMTC configuration | 1~3 | | SMTC.1 |
| DRX configuration | 1~3 | | DRX.3 |
| reportConfigType | 1~3 | | aperiodic |
| reportQuantity | 1~3 | | cri-RSRP |
| Number of reported RS | 1~3 | | 2 |
| qcl-Info | 1~3 | | SSB#0 for resource#0 |
| | | | SSB#1 for resource#1 |

| | | | |
|---|-----|-------|------|
| reportSlotOffsetList | 1~3 | slots | 26 |
| T1 | 1~3 | s | 5 |
| EPRE ratio of PSS to SSS | 1~3 | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | |
| EPRE ratio of OCNB DMRS to SSS ^{Note 1} | | | |
| EPRE ratio of OCNB to OCNB DMRS ^{Note 1} | | | |
| Propagation condition | 1~3 | | AWGN |
| Note 1: OCNB shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |

Table A.6.6.4.4.2-2: CSI-RS specific test parameters

| Parameter | Config | Unit | CSI-RS#0 | CSI-RS#1 |
|--|--------|---------------|----------|----------|
| N_{oc} ^{Note1} | 1~3 | dBm/15kHz | -94.65 | |
| N_{oc} ^{Note1} | 1,2 | dBm/SSB SCS | -94.65 | |
| | 3 | | -91.65 | |
| \hat{E}_s / I_{ot} | 1~3 | dB | 0 | 3 |
| CSI-RS RSRP ^{Note2} | 1,2 | dBm/SSB SCS | -94.65 | -91.65 |
| | 3 | | -91.65 | -88.65 |
| I_o ^{Note2} | 1,2 | dBm/9.36 MHz | -63.69 | -61.93 |
| | 3 | dBm/38.16 MHz | -57.59 | -55.84 |
| \hat{E}_s / N_{oc} | 1~3 | dB | 0 | 3 |
| <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | |

A.6.6.4.4.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 26 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause 10.1.20.1.1 and relative accuracy requirement in clause 10.1.20.1.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.4.4 CSI-RS based L1-RSRP measurement when DRX is used

Editor's Note: to be added based on A.6.6.3.3.

A.6.7 Measurement Performance requirements

A.6.7.1 SS-RSRP

A.6.7.1.1 SA: intra-frequency case measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.2.1.1 and 10.1.2.1.2 for intra-frequency measurements.

A.6.7.1.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.6.7.1.1.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in A.6.7.1.1.2-2. In all test cases, Cell 1 is the PCell, and Cell 2 is the target cell.

Table A.6.7.1.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

| Config | Description |
|--------|---|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations in each supported band |

Table A.6.7.1.1.2-2: SS-RSRP Intra frequency test parameters

| Parameter | | Unit | Test 1 | | Test 2 | | Test 3 | |
|--------------------------------------|------------|------|-----------------------------|--------|-------------|--------|-------------|--------|
| | | | Cell 1 | Cell 2 | Cell 1 | Cell 2 | Cell 1 | Cell 2 |
| Cell ID | | | 489 | 0 | 489 | 0 | 489 | 0 |
| SSB ARFCN | | | freq1 | | freq1 | | freq1 | |
| Duplex mode | Config 1 | | FDD | | | | | |
| | Config 2,3 | | TDD | | | | | |
| TDD configuration | Config 1 | | Not Applicable | | | | | |
| | Config 2 | | TDDConf.1.1 | | | | | |
| | Config 3 | | TDDConf.2.1 | | | | | |
| BW _{channel} | Config 1 | MHz | 10: N _{RB,c} = 52 | | | | | |
| | Config 2 | | 10: N _{RB,c} = 52 | | | | | |
| | Config 3 | | 40: N _{RB,c} = 106 | | | | | |
| BWP BW | Config 1 | | 10: N _{RB,c} = 52 | | | | | |
| | Config 2 | | 10: N _{RB,c} = 52 | | | | | |
| | Config 3 | | 40: N _{RB,c} = 106 | | | | | |
| Downlink initial BWP configuration | | | DLBWP.0.1 | | | | | |
| Downlink dedicated BWP configuration | | | DLBWP.1.1 | | | | | |
| Uplink initial BWP configuration | | | ULBWP.0.1 | | | | | |
| Uplink dedicated BWP configuration | | | ULBWP.1.1 | | | | | |
| TRS configuration | Config 1 | | TRS.1.1 FDD | NA | TRS.1.1 FDD | NA | TRS.1.1 FDD | NA |
| | Config 2 | | TRS.1.1 TDD | NA | TRS.1.1 TDD | NA | TRS.1.1 TDD | NA |
| | Config 3 | | TRS.1.2 TDD | NA | TRS.1.2 TDD | NA | TRS.1.2 TDD | NA |
| DRX Cycle | | ms | Not Applicable | | | | | |
| PDSCH Reference measurement channel | Config 1 | | SR.1.1 FDD | - | SR.1.1 FDD | - | SR.1.1 FDD | - |
| | Config 2 | | SR.1.1 TDD | - | SR.1.1 TDD | - | SR.1.1 TDD | - |
| | Config 3 | | SR2.1 TDD | - | SR2.1 TDD | - | SR2.1 TDD | - |
| RMSI CORESET Reference Channel | Config 1 | | CR.1.1 FDD | - | CR.1.1 FDD | - | CR.1.1 FDD | - |
| | Config 2 | | CR.1.1 TDD | - | CR.1.1 TDD | - | CR.1.1 TDD | - |
| | Config 3 | | CR2.1 TDD | - | CR2.1 TDD | - | CR2.1 TDD | - |
| Control channel RMC | Config 1 | | CCR.1.1 FDD | - | CCR.1.1 FDD | - | CCR.1.1 FDD | - |
| | Config 2 | | CCR.1.1 TDD | - | CCR.1.1 TDD | - | CCR.1.1 TDD | - |
| | Config 3 | | CCR2.1 TDD | - | CCR2.1 TDD | - | CCR2.1 TDD | - |
| SSB configuration | | | SSB 1 FR1 | - | SSB 1 FR1 | - | SSB 1 FR1 | - |

| | | | | | | | | |
|--|------------|---|----------------------------------|--------------|--------------|--------------|--------------|----------------------------------|
| | Config 2 | | SSB 1 FR1 | | SSB 1 FR1 | | SSB 1 FR1 | |
| | Config 3 | | SSB 2 FR1 | | SSB 2 FR1 | | SSB 2 FR1 | |
| SSB configuration | Config 1 | | SSB.1 FR1 | SSB.1 FR1 | SSB.1 FR1 | SSB.1 FR1 | SSB.1 FR1 | SSB.1 FR1 |
| | Config 2 | | SSB.1 FR1 | SSB.1 FR1 | SSB.1 FR1 | SSB.1 FR1 | SSB.1 FR1 | SSB.1 FR1 |
| | Config 3 | | SSB.2 FR1 | SSB.2 FR1 | SSB.2 FR1 | SSB.2 FR1 | SSB.2 FR1 | SSB.2 FR1 |
| Time offset with Cell 1 | Config 1 | ms | - | 3 | - | 3 | - | 3 |
| | Config 2,3 | µs | - | 3 | - | 3 | - | 3 |
| SMTC configuration | Config 1 | | SMTC.2 | | | | | |
| | Config 2,3 | | SMTC.1 | | | | | |
| OCNG Patterns | | | OCNG pattern 1 | | | | | |
| PDSCH/PDCCH subcarrier spacing | Config 1,2 | kHz | 15 kHz | | | | | |
| | Config 3 | | 30kHz | | | | | |
| EPRE ratio of PSS to SSS | | dB | 0 | 0 | 0 | 0 | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | | | |
| N_{oc} ^{Note2} | Config 1,2 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | -106 | | -88 | | | -114 |
| | | NR_FDD_FR1_B NR_TDD_FR1_C | | | | | | -113.5 |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | | -113 |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | -112.5 |
| | | NR_FDD_FR1_G NR_FDD_FR1_H | | | | | | -112 |
| | | | | | | | | -111 |
| | | | | | | | | -110.5 |
| | Config 3 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | Not applicable ^{Note 5} | | -94 | | | -114 |
| | | NR_FDD_FR1_B NR_TDD_FR1_C | | | | | | -113.5 |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | | -113 |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | -112.5 |
| | | NR_FDD_FR1_G NR_FDD_FR1_H | | | | | | -112 |
| | | | | | | | | -111 |
| | | | | | | | | -110.5 |
| N_{oc} ^{Note2} | Config 1,2 | | -106 | | -88 | | | Same as Noc/15kHz |
| | Config 3 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | | | | | | Not applicable ^{Note 5} |
| | | NR_FDD_FR1_B | -110.5 | | | | | |
| | | NR_TDD_FR1_C | -110 | | | | | |

| | | | | | | | | | | |
|--|--------------|--|----------------------------------|----------------------------------|----------------------------------|--------|--------|--------|--------|--|
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | | -109.5 | | |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | -109 | | |
| | | NR_FDD_FR1_G | | | | | | -108 | | |
| | | NR_FDD_FR1_H | | | | | | -107.5 | | |
| \hat{E}_s/I_{ot} | | | dB | 2.46 | -5.97 | 2.46 | -5.97 | -0.01 | -4.76 | |
| \hat{E}_s/N_{oc} | | | dB | 6 | 1 | 6 | 1 | 3 | 0 | |
| SS- RSRP ^{Not e3} | Config 1,2 | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 6</small> | dBm/SCS | -100 | -105 | -82 | -87 | - | - | |
| | | NR_FDD_FR1_B | | | | | | 111.00 | 114.00 | |
| | | NR_TDD_FR1_C | | | | | | - | - | |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | | 110.50 | 113.50 | |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | 110.00 | 113.00 | |
| | | NR_FDD_FR1_G | | | | | | - | - | |
| | NR_FDD_FR1_H | 109.50 | | 112.50 | | | | | | |
| | Config 3 | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 6</small> | | - | - | | | | | |
| | | NR_FDD_FR1_B | | 109.00 | 112.00 | | | | | |
| | | NR_TDD_FR1_C | | - | - | | | | | |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | 108.00 | 111.00 | | | | | |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | - | - | | | | | |
| | | NR_FDD_FR1_G | | 107.50 | 110.50 | | | | | |
| | | NR_FDD_FR1_H | | - | - | | | | | |
| NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 6</small> | | 108.00 | 111.00 | | | | | | | |
| NR_FDD_FR1_B | - | - | | | | | | | | |
| NR_TDD_FR1_C | 107.50 | 110.50 | | | | | | | | |
| NR_FDD_FR1_D, NR_TDD_FR1_D | - | - | | | | | | | | |
| NR_FDD_FR1_E, NR_TDD_FR1_E | 107.00 | 110.00 | | | | | | | | |
| NR_FDD_FR1_G | - | - | | | | | | | | |
| NR_FDD_FR1_H | 106.50 | 109.50 | | | | | | | | |
| | | | Not applicable ^{Note 5} | Not applicable ^{Note 5} | -85 | -90 | - | - | | |
| | | | | | | | 106.00 | 109.00 | | |
| | | | | | | | 105.00 | 108.00 | | |
| | | | | | | | - | - | | |
| | | | | | | | 104.50 | 107.50 | | |
| I_o ^{Note3} | Config 1,2 | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 6</small> | dBm/ 9.36MHz | -70.09 | | -52.09 | | -80.03 | | |
| | | NR_FDD_FR1_B | | | | | | -79.53 | | |
| | | NR_TDD_FR1_C | | | | | | -79.03 | | |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | | -78.53 | | |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | -78.03 | | |
| | | NR_FDD_FR1_G | | | | | | -77.03 | | |
| | NR_FDD_FR1_H | -76.53 | | | | | | | | |
| | Config 3 | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 6</small> | | dBm/ 38.16MHz | Not applicable ^{Note 5} | | | -51.99 | -73.94 | |
| | | NR_FDD_FR1_B | | | | | | | -73.44 | |
| | | NR_TDD_FR1_C | | | | | | | -72.94 | |
| NR_FDD_FR1_D, NR_TDD_FR1_D | | -72.44 | | | | | | | | |

| | | | | | | |
|-----------------------|--|-------------------------------|---|------|--|--------|
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -71.94 |
| | | NR_FDD_FR1_G | | | | -70.94 |
| | | NR_FDD_FR1_H | | | | -70.44 |
| Propagation condition | | | - | AWGN | | |
| Antenna configuration | | | | 1x2 | | |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | |
| Note 3: | SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | |
| Note 4: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | | | |
| Note 5: | Subtest 1 is not used when testing with 30kHz SSB SCS. | | | | | |
| Note 6: | The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification | | | | | |

A.6.7.1.1.3 Test Requirements

The SS-RSRP measurement accuracy for cell 1 and cell 2 shall fulfil absolute requirement in clause 10.1.2.1.1 and relative requirement in clause 10.1.2.1.2.

A.6.7.1.2 SA inter-frequency case measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.4.1.1 and 10.1.4.1.2 for inter-frequency measurements with the testing configurations for NR cells in Table A.6.7.1.2.1-1.

Table A.6.7.1.2.1-1: Applicable NR configurations for FR1 inter-frequency SS-RSRP accuracy test

| Config | Description |
|--------|---|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations in each supported band |

A.6.7.1.2.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on a different frequency than the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.6.7.1.2.2-1 below. Both absolute and relative accuracy of RSRP inter-frequency measurements are tested by using the parameters in Table A.6.7.1.2.2-1. The inter-frequency measurements are supported by a measurement gap.

Table A.6.7.1.2.2-1: SS-RSRP inter-frequency test parameters

| Parameter | Config | Unit | Test 1 | | Test 2 | |
|-----------|--------|------|--------|--------|--------|--------|
| | | | Cell 1 | Cell 2 | Cell 1 | Cell 2 |

| | | | | | | |
|---|--|-----|-----------------------------|--------|-------------------------------------|--------|
| SSB ARFCN | 1~3 | | freq1 | freq2 | freq1 | freq2 |
| BW _{channel} | 1 | MHz | 10: N _{RB,c} = 52 | | 10: N _{RB,c} = 52 | |
| | 2 | | 10: N _{RB,c} = 52 | | 10: N _{RB,c} = 52 | |
| | 3 | | 40: N _{RB,c} = 106 | | 40: N _{RB,c} = 106 | |
| Duplex mode | 1 | | FDD | | FDD | |
| | 2 | | TDD | | TDD | |
| | 3 | | TDD | | TDD | |
| TDD configuration | 1 | | N/A | | N/A | |
| | 2 | | TDDConf.1.1 | | TDDConf.1.1 | |
| | 3 | | TDDConf.2.1 | | TDDConf.2.1 | |
| PDSCH Reference measurement channel | 1 | | SR.1.1 FDD | - | SR.1.1 FDD | - |
| | 2 | | SR.1.1 TDD | | SR.1.1 TDD | |
| | 3 | | SR.2.1 FDD | | SR.2.1 FDD | |
| RMSI CORESET Reference Channel | 1 | | CR.1.1 FDD | - | CR.1.1 FDD | - |
| | 2 | | CR.1.1 TDD | | CR.1.1 TDD | |
| | 3 | | CR.2.1 FDD | | CR.2.1 FDD | |
| Dedicated CORESET Reference Channel | 1 | | CCR.1.1 FDD | - | CCR.1.1 FDD | - |
| | 2 | | CCR.1.1 TDD | | CCR.1.1 TDD | |
| | 3 | | CCR.2.1 TDD | | CCR.2.1 TDD | |
| SSB configuration | 1 | | SSB.1 FR1 | | SSB.1 FR1 | |
| | 2 | | SSB.1 FR1 | | SSB.1 FR1 | |
| | 3 | | SSB.2 FR1 | | SSB.2 FR1 | |
| OCNG Patterns | 1~3 | | OP.1 | | OP.1 | |
| TRS configuration | 1 | | TRS.1.1 FDD | - | TRS.1.1 FDD | |
| | 2 | | TRS.1.1 TDD | | TRS.1.1 TDD | |
| | 3 | | TRS.1.2 TDD | | TRS.1.2 TDD | |
| Initial BWP Configuration | 1~3 | | DLBWP.0.1 ULBWP.0.1 | | DLBWP.0.1 ULBWP.0.1 | |
| Dedicated BWP configuration | 1~3 | | DLBWP.1.1 ULBWP.1.1 | | DLBWP.1.1 ULBWP.1.1 | |
| Time offset with Cell 1 | 1 | ms | - | 3 | - | 3 |
| | 2,3 | μs | - | 3 | - | 3 |
| SMTC configuration | 1 | | SMTC.2 | | SMTC.2 | |
| | 2,3 | | SMTC.1 | | SMTC.1 | |
| EPRE ratio of PSS to SSS | 1~3 | dB | 0 | 0 | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | | | | |
| N_{oc} ^{Note 2} | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 5</small> | 1~3 | dBm/15 kHz | -94.65 | $(N_{oc}$ for Channel 2 +8dB) | -115 |
| | NR_FDD_FR1_B | | | | | -114.5 |
| | NR_TDD_FR1_C | | | | | -114 |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | -113.5 |

| | | | | | | | | |
|---|---|---|----------------------|---------|-------------------------------------|--------|---------|--------|
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | -113 | |
| | NR_FDD_FR1_G | | | | | | -112 | |
| | NR_FDD_FR1_H | | | | | | -111.5 | |
| N_{oc} Note2 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 1,2,4,5 | dBm/SS B SCS | -94.65 | $(N_{oc}$ for Channel 2 +8dB) | | -115 | |
| | NR_FDD_FR1_B | | | | | | -114.5 | |
| | NR_TDD_FR1_C | | | | | | -114 | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | | -113.5 | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | -113 | |
| | NR_FDD_FR1_G | | | | | | -112 | |
| | NR_FDD_FR1_H | | | | | | -111.5 | |
| | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | | | | | | 3 | -91.65 |
| | NR_FDD_FR1_B | -112.50 | | | | | | |
| | NR_TDD_FR1_C | -112.00 | | | | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | -111.50 | | | | | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | -111.00 | | | | | | |
| | NR_FDD_FR1_G | -110.00 | | | | | | |
| | NR_FDD_FR1_H | -110.50 | | | | | | |
| | | | | | | | | |
| | | \hat{E}_s/I_{ot} | | 1~3 | dB | 10 | 10 | 13 |
| SS- RSRP Note3 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 1,2,4,5 | dBm/SC S | -84.65 | (RSRP for Cell 2 +25dB) | | -118.00 | |
| | NR_FDD_FR1_B | | | | | | -117.50 | |
| | NR_TDD_FR1_C | | | | | | -117.00 | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | | -116.50 | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | -116.00 | |
| | NR_FDD_FR1_G | | | | | | -115.00 | |
| | NR_FDD_FR1_H | | | | | | -114.50 | |
| | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | | | | | | 3 | -81.65 |
| | NR_FDD_FR1_B | -114.50 | | | | | | |
| | NR_TDD_FR1_C | -114.00 | | | | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | -113.50 | | | | | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | -113.00 | | | | | | |
| | NR_FDD_FR1_G | -112.00 | | | | | | |
| | NR_FDD_FR1_H | -111.50 | | | | | | |
| | | | | | | | | |
| | I_o Note3 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | | 1,2,4,5 | dBm/ 9.36MH z | -56.28 | | |
| NR_FDD_FR1_B | | -84.78 | | | | | | |
| NR_TDD_FR1_C | | -84.28 | | | | | | |
| NR_FDD_FR1_D, NR_TDD_FR1_D | | -83.78 | | | | | | |
| NR_FDD_FR1_E, NR_TDD_FR1_E | | -83.28 | | | | | | |
| NR_FDD_FR1_G | | -82.28 | | | | | | |
| NR_FDD_FR1_H | | -81.78 | | | | | | |
| NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | | 3 | dBm/ 38.16M Hz | -50.19 | | | | -79.19 |
| NR_FDD_FR1_B | | | | | | | | -78.69 |
| NR_TDD_FR1_C | | | | | | | | -78.19 |

| | | | | | | | |
|---------|--|-----|----|------|----|------|--------|
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | | -77.69 |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | -77.19 |
| | NR_FDD_FR1_G | | | | | | -76.19 |
| | NR_FDD_FR1_H | | | | | | -75.69 |
| | \hat{E}_s / N_{oc} | 1~3 | dB | 10 | 10 | 13 | -3 |
| | Propagation condition | 1~3 | - | AWGN | | AWGN | |
| | Antenna configuration | 1~3 | | 1x2 | | 1x2 | |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | | |
| Note 3: | RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | | |
| Note 4: | RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | | | | |
| Note 5: | The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification | | | | | | |

A.6.7.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 1 and Cell 2 shall fulfil the absolute requirement in clause 10.1.4.1.1 and relative requirement in clause 10.1.4.1.2.

A.6.7.1.3 Void

A.6.7.2 SS-RSRQ

A.6.7.2.1 SA: Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.7.1.1.

A.6.7.2.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.6.7.2.1.2-1. The absolute accuracy of SS-RSRQ intra-frequency measurement is tested by using the parameters in Table A.6.7.2.1.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is the target cell.

Table A.6.7.2.1.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

| Config | Description |
|--------|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.6.7.2.1.2-2: SS-RSRQ Intra frequency test parameters

| Parameter | Unit | Test 1 | | Test 2 | | Test 3 | |
|-----------|------|--------|--------|--------|--------|--------|--------|
| | | Cell 1 | Cell 2 | Cell 1 | Cell 2 | Cell 1 | Cell 2 |

| | | | | | | | | |
|-------------------------------------|------------------|-----|-----------------------------|---|-------------|---|-------------|---|
| SSB ARFCN | | | freq1 | | freq1 | | freq1 | |
| Duplex mode | Config 1 | | FDD | | | | | |
| | Config 2,3 | | TDD | | | | | |
| TDD configuration | Config 1 | | Not Applicable | | | | | |
| | Config 2 | | TDDConf.1.1 | | | | | |
| | Config 3 | | TDDConf.2.1 | | | | | |
| BW _{channel} | Config 1 | MHz | 10: N _{RB,c} = 52 | | | | | |
| | Config 2 | | 10: N _{RB,c} = 52 | | | | | |
| | Config 3 | | 40: N _{RB,c} = 106 | | | | | |
| Gap Pattern ID | | | 0 | | | | | |
| BWP configuration | Initial DL BWP | | DLBWP.0.1 | | | | | |
| | Dedicated DL BWP | | DLBWP.1.1 | | | | | |
| | Initial UL BWP | | ULBWP.0.1 | | | | | |
| | Dedicated UL BWP | | ULBWP.1.1 | | | | | |
| DRX Cycle | | ms | Not Applicable | | | | | |
| PDSCH Reference measurement channel | Config 1 | | SR.1.1 FDD | - | SR.1.1 FDD | - | SR.1.1 FDD | - |
| | Config 2 | | SR.1.1 TDD | | SR.1.1 TDD | | SR.1.1 TDD | |
| | Config 3 | | SR2.1 TDD | | SR2.1 TDD | | SR2.1 TDD | |
| RMSI CORESET Reference Channel | Config 1 | | CR.1.1 FDD | - | CR.1.1 FDD | - | CR.1.1 FDD | - |
| | Config 2 | | CR.1.1 TDD | | CR.1.1 TDD | | CR.1.1 TDD | |
| | Config 3 | | CR.2.1 TDD | | CR.2.1 TDD | | CR.2.1 TDD | |
| Control Channel RMC | Config 1 | | CCR.1.1 FDD | - | CCR.1.1 FDD | - | CCR.1.1 FDD | - |
| | Config 2 | | CCR.1.1 TDD | | CCR.1.1 TDD | | CCR.1.1 TDD | |
| | Config 3 | | CCR.2.1 TDD | | CCR.2.1 TDD | | CCR.2.1 TDD | |
| OCNG Patterns | | | OP. 1 | | | | | |
| SS-RSSI-Measurement | | | Not Applicable | | | | | |
| Time offset with Cell 1 | Config 1 | ms | - | 3 | - | 3 | - | 3 |
| | Config 2,3 | µs | - | 3 | - | 3 | - | 3 |
| SMTTC configuration | Config 1 | | SMTTC.2 | | | | | |
| | Config 2,3 | | SMTTC.1 | | | | | |
| SSB configuration | Config 1,2 | | SSB.1 FR1 | | | | | |
| | Config 3 | | SSB.2 FR1 | | | | | |
| | Config 1,2 | kHz | 15 kHz | | | | | |

| | | | | | | | | | |
|--|----------------------------|--------------------------------------|--------------------------------------|---------|-----|------|------|-------|-------|
| PDSCH/PDCCH subcarrier spacing | | Config 3 | | 30kHz | | | | | |
| EPRE ratio of PSS to SSS | | | dB | 0 | 0 | 0 | 0 | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | | | | |
| N_{oc} Note2 | Config 1,2 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | | | | | | | |
| | | NR_FDD_FR1_B | -113.5 | | | | | | |
| | | NR_TDD_FR1_C | -113 | | | | | | |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | -112.5 | | | | | | |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | -112 | | | | | | |
| | | NR_FDD_FR1_G | -111 | | | | | | |
| | | NR_FDD_FR1_H | -110.5 | | | | | | |
| | | Config 3 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | -91 | - | | | | -114 |
| | NR_FDD_FR1_B | | -113.5 | | | | | | |
| | NR_TDD_FR1_C | | -113 | | | | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | -112.5 | | | | | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | -112 | | | | | | |
| | NR_FDD_FR1_G | | -111 | | | | | | |
| | N_{oc} Note2 | Config 1,2 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | dBm/SCS | -85 | -101 | | | |
| NR_FDD_FR1_B | | | -113.5 | | | | | | |
| NR_TDD_FR1_C | | | -113 | | | | | | |
| NR_FDD_FR1_D, NR_TDD_FR1_D | | | -112.5 | | | | | | |
| NR_FDD_FR1_E, NR_TDD_FR1_E | | | -112 | | | | | | |
| NR_FDD_FR1_G | | | -111 | | | | | | |
| NR_FDD_FR1_H | | | -110.5 | | | | | | |
| Config 3 | | | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | | | | | | |
| | | NR_FDD_FR1_B | -110.5 | | | | | | |
| | | NR_TDD_FR1_C | -110 | | | | | | |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | -109.5 | | | | | | |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | -109 | | | | | | |
| | | NR_FDD_FR1_G | -108 | | | | | | |
| NR_FDD_FR1_H | | -107.5 | | | | | | | |
| \hat{E}_s/I_{α} | | | dB | -1.76 | | -4.7 | | -5.46 | -5.46 |
| \hat{E}_s/N_{oc} | | | dB | 3 | 3 | -2.9 | -2.9 | -4 | -4 |

| | | | | | | | | | |
|----------------------------------|---|---|-----------------|------------------|--------|--------|--------|----------|----------|
| SS- RSRP ^{Note 3} | Config 1,2 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | dBm/SCS | -82 | -82 | -103.9 | -103.9 | -118 | -118 |
| | | NR_FDD_FR1_B | | | | | | -117.5 | -117.5 |
| | | NR_TDD_FR1_C | | | | | | -117 | -117 |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | | -116.5 | -116.5 |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | -116 | -116 |
| | | NR_FDD_FR1_G | | | | | | -115 | -115 |
| | | NR_FDD_FR1_H | | | | | | -114.5 | -114.5 |
| | Config 3 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | | -85 | -85 | - | - | -115 | -115 |
| | | NR_FDD_FR1_B | | | | | | -114.5 | -114.5 |
| | | NR_TDD_FR1_C | | | | | | -114 | -114 |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | | -113.5 | -113.5 |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | -113 | -113 |
| | | NR_FDD_FR1_G | | | | | | -112 | -112 |
| | | NR_FDD_FR1_H | | | | | | -111.5 | -111.5 |
| SS-RSRQ ^{Note 3} | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | dB | -14.77 | -14.77 | -16.76 | -16.76 | -17.34 | -17.34 | |
| | NR_FDD_FR1_B | | | | | | | | |
| | NR_TDD_FR1_C | | | | | | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | | | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | | | |
| | NR_FDD_FR1_G | | | | | | | | |
| | NR_FDD_FR1_H | | | | | | | | |
| I _o ^{Note 3} | Config 1,2 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | dBm/ 9.36MHz | -50 | | -70 | -83.5 | | |
| | | NR_FDD_FR1_B | | | | | -83 | | |
| | | NR_TDD_FR1_C | | | | | -82.5 | | |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | -82 | | |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | -81.5 | | |
| | | NR_FDD_FR1_G | | | | | -80.5 | | |
| | | NR_FDD_FR1_H | | | | | -80 | | |
| | Config 3 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | | dBm/ 38.16MHz | -50 | | - | -77.4 | |
| | | NR_FDD_FR1_B | | | | | | -76.9 | |
| | | NR_TDD_FR1_C | | | | | | -76.4 | |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | | -75.9 | |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | -75.4 | |
| | | NR_FDD_FR1_G | | | | | | -74.4 | |
| | | NR_FDD_FR1_H | | | | | | -73.9 | |
| Propagation condition | | | - | AWGN | AWGN | AWGN | AWGN | AWG N | AWG N |
| Antenna configuration | | | | 1x2 | 1x2 | 1x2 | 1x2 | 1x2 | 1x2 |

| | |
|---------|--|
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. |
| Note 3: | SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. |
| Note 4: | SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. |
| Note 5: | NR operating band groups are as defined in clause 3.5.2. |
| Note 6: | The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification |

A.6.7.2.1.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.7.1.1.

A.6.7.2.2 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.9.1.1 and 10.1.9.1.2.

A.6.7.2.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.6.7.2.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-RSRQ inter-frequency measurement are tested by using test parameters in Table A.6.7.2.2.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.6.7.2.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

| Config | Description |
|--------|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.6.7.2.2-2: SS-RSRQ Inter frequency test parameters

| Parameter | | Unit | Test 1 | | Test 2 | | Test 3 | |
|-----------------------|--------------|------|-----------------------------|--------|--------|--------|--------|--------|
| | | | Cell 1 | Cell 2 | Cell 1 | Cell 2 | Cell 1 | Cell 2 |
| SSB ARFCN | | | freq1 | freq2 | freq1 | freq2 | freq1 | freq2 |
| Duplex mode | Config 1 | | FDD | | | | | |
| | Config 2,3 | | TDD | | | | | |
| TDD configuration | Config 1 | | Not Applicable | | | | | |
| | Config 2 | | TDDConf.1.1 | | | | | |
| | Config 3 | | TDDConf.2.1 | | | | | |
| BW _{channel} | Config 1 | MHz | 10: N _{RB,c} = 52 | | | | | |
| | Config 2 | | 10: N _{RB,c} = 52 | | | | | |
| | Config 3 | | 40: N _{RB,c} = 106 | | | | | |
| Gap pattern ID | Config 1,2,3 | | 0 | | | | | |
| BWP BW | Config 1 | | 10: N _{RB,c} = 52 | | | | | |

| | | | | | | | | |
|--|------------|--|-----------------------------|--------|-------------|---|-------------|--------|
| | Config 2 | | 10: N _{RB,c} = 52 | | | | | |
| | Config 3 | | 40: N _{RB,c} = 106 | | | | | |
| DRX Cycle | | ms | Not Applicable | | | | | |
| PDSCH Reference measurement channel | Config 1,4 | | SR.1.1 FDD | | SR.1.1 FDD | | SR.1.1 FDD | |
| | Config 2,5 | | SR.1.1 TDD | - | SR.1.1 TDD | - | SR.1.1 TDD | - |
| | Config 3,6 | | SR2.1 TDD | | SR2.1 TDD | | SR2.1 TDD | |
| RMSI CORESET Reference Channel | Config 1 | | CR.1.1 FDD | - | R.1.1 FDD | - | CR.1.1 FDD | |
| | Config 2 | | CR.1.1 TDD | | CR.1.1 TDD | | CR.1.1 TDD | |
| | Config 3 | | CR2.1 TDD | | CR2.1 TDD | | CR2.1 TDD | |
| Dedicated CORESET Reference Channel | Config 1 | | CCR.1.1 FDD | | CCR.1.1 FDD | | CCR.1.1 FDD | |
| | Config 2 | | CCR.1.1 TDD | - | CCR.1.1 TDD | - | CCR.1.1 TDD | - |
| | Config 3 | | CCR2.1 TDD | | CCR2.1 TDD | | CCR2.1 TDD | |
| OCNG Patterns | | | OCNG pattern 1 | | | | | |
| Time offset with Cell 1 | Config 1 | ms | - | 3 | - | 3 | - | 3 |
| | Config 2,3 | µs | - | 3 | - | 3 | - | 3 |
| SMTC configuration | Config 1 | | SMTC pattern 2 | | | | | |
| | Config 2,3 | | SMTC pattern 1 | | | | | |
| SSB configuration | Config 1,2 | | SSB pattern 1 in FR1 | | | | | |
| | Config 3 | | SSB pattern 2 in FR1 | | | | | |
| PDSCH/PDCCH subcarrier spacing | Config 1,2 | kHz | 15 kHz | | | | | |
| | Config 3 | | 30 kHz | | | | | |
| EPRE ratio of PSS to SSS | | dB | 0 | 0 | 0 | 0 | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | | | |
| N _{oc} ^{Note2} | Config 1,2 | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | dBm/15kHz | -80.18 | -106 | | | -116 |
| | | NR_FDD_FR1_B | | | | | | -115.5 |
| | | NR_TDD_FR1_C | | | | | | -115 |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | | | -114.5 |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | | | -114 |
| | | NR_FDD_FR1_G | | | | | | -113 |
| | | NR_FDD_FR1_H | | | | | | -112.5 |
| N _{oc} ^{Note2} | Config 3 | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | dBm/15kHz | -86.27 | -113 | | | -116 |
| | | NR_FDD_FR1_B | | | | | | -115.5 |

| | | | | | | | | | | |
|--------------------------|------------|---|---------|----------|--------|--------|--------|----------|-----------------|------------|
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | | | -108.5 | - 113.2 5 | |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | | | -108 | - 112.7 5 | |
| | | NR_FDD_FR1_G | | | | | | -107 | - 111.7 5 | |
| | | NR_FDD_FR1_H | | | | | | -106.5 | - 111.2 5 | |
| SS-RSRQ ^{Note3} | | NR_FDD_FR1_A NR_TDD_FR1_A <small>NOTE 6</small> | dB | -14.77 | -14.77 | -40.59 | -40.59 | 12.56T | 14.76 T | |
| | | NR_FDD_FR1_B NR_TDD_FR1_C | | | | | | | | |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | | | | | |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | | | | | |
| | | NR_FDD_FR1_G NR_FDD_FR1_H | | | | | | | | |
| Io ^{Note3} | Config 1,2 | NR_FDD_FR1_A NR_TDD_FR1_A <small>NOTE 6</small> | dBm/SCS | -50 | | | -75.83 | | -83.28 | - 85.83 |
| | | NR_FDD_FR1_B | | | | | | | -82.78 | - 85.33 |
| | | NR_TDD_FR1_C | | | | | | | -82.28 | - 84.83 |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | | | | -81.78 | - 84.33 |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | | | | -81.28 | - 83.83 |
| | | NR_FDD_FR1_G | | | | | | | -80.28 | - 82.83 |
| | | NR_FDD_FR1_H | | | | | | | -79.78 | - 82.33 |
| | Config 3 | NR_FDD_FR1_A NR_TDD_FR1_A <small>NOTE 6</small> | | -50 | | -76.73 | | -77.19 | - 79.73 | |
| | | NR_FDD_FR1_B | | | | | | -76.69 | - 79.23 | |
| | | NR_TDD_FR1_C | | | | | | -76.19 | - 78.73 | |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | | | -75.69 | - 78.23 | |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | | | -75.19 | - 77.73 | |
| | | NR_FDD_FR1_G | | | | | | -74.19 | - 76.73 | |
| | | NR_FDD_FR1_H | | | | | | -73.69 | - 76.53 | |
| Propagation condition | | | - | AWG N | AWGN | AWGN | AWGN | AWG N | AWG N | |
| Antenna configuration | | | | 1x2 | 1x2 | 1x2 | 1x2 | 1x2 | 1x2 | |

| | |
|---------|--|
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. |
| Note 3: | SS-RSRQ, SS-RSRP, and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves. |
| Note 4: | SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. |
| Note 5: | NR operating band groups are as defined in clause 3.5.2. |
| Note 6: | The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification |

A.6.7.2.2.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.9.1.1 and 10.1.9.1.2.

A.6.7.3 SS-SINR

A.6.7.3.1 SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.12.1.1.

A.6.7.3.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.6.7.3.1.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table A.6.7.3.1.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is the target cell.

Table A.6.7.3.1.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

| Config | Description |
|--------|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.6.7.3.1.2-2: SS-SINR Intra frequency test parameters

| Parameter | | Unit | Test 1 | | Test 2 | |
|--------------------------------------|------------|------|----------------|--------|--------|--------|
| | | | Cell 1 | Cell 2 | Cell 1 | Cell 2 |
| SSB ARFCN | | | freq1 | | freq1 | |
| Duplex mode | Config 1 | | FDD | | | |
| | Config 2,3 | | TDD | | | |
| TDD configuration | Config 1 | | Not Applicable | | | |
| | Config 2 | | TDDConf.1.1 | | | |
| | Config 3 | | TDDConf.2.1 | | | |
| Downlink initial BWP configuration | | | DLBWP.0.1 | | | |
| Downlink dedicated BWP configuration | | | DLBWP.1.1 | | | |
| Uplink initial BWP configuration | | | ULBWP.0.1 | | | |
| Uplink dedicated BWP configuration | | | ULBWP.1.1 | | | |

| | | | | | | |
|--|---|----------------|----------------|--------|-------------|---|
| DRX Cycle configuration | | ms | Not Applicable | | | |
| TRS configuration | Config 1 | | TRS.1.1 FDD | | | |
| | Config 2 | | TRS.1.1 TDD | | | |
| | Config 3 | | TRS.1.2 TDD | | | |
| PDSCH Reference measurement channel | Config 1 | | SR.1.1 FDD | - | SR.1.1 FDD | - |
| | Config 2 | | SR.1.1 TDD | - | SR.1.1 TDD | - |
| | Config 3 | | SR.2.1 TDD | - | SR.2.1 TDD | - |
| RMSI CORESET Reference Channel | Config 1 | | CR.1.1 FDD | - | CR.1.1 FDD | - |
| | Config 2 | | CR.1.1 TDD | - | CR.1.1 TDD | - |
| | Config 3 | | CR.2.1 TDD | - | CR.2.1 TDD | - |
| Dedicated CORESET Reference Channel | Config 1 | | CCR.1.1 FDD | - | CCR.1.1 FDD | - |
| | Config 2 | | CCR.1.1 TDD | - | CCR.1.1 TDD | - |
| | Config 3 | | CCR.2.1 TDD | - | CCR.2.1 TDD | - |
| OCNG Patterns | | | OP.1 | | | |
| SS-RSSI-Measurement | | | Not Applicable | | | |
| Time offset with Cell 1 | Config 1 | ms | - | 3 | - | 3 |
| | Config 2,3 | µs | - | 3 | - | 3 |
| SMTTC configuration | Config 1 | | SMTTC.2 | | | |
| | Config 2,3 | | SMTTC.1 | | | |
| SSB configuration | Config 1,2 | | SSB.1 FR1 | | | |
| | Config 3 | | SSB.2 FR1 | | | |
| PDSCH/PDCCH subcarrier spacing | Config 1,2 | kHz | 15 | | | |
| | Config 3 | | 30 | | | |
| EPRE ratio of PSS to SSS | | dB | 0 | 0 | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | |
| N_{oc} <small>Note2</small> | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 6</small> | dBm/15kHz z | -93 | -116 | | |
| | NR_FDD_FR1_B | | | -115.5 | | |
| | NR_TDD_FR1_C | | | -115 | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | -114.5 | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | -114 | | |
| | NR_FDD_FR1_G | | | -113 | | |
| | NR_FDD_FR1_H | | | -112.5 | | |

| | | | | | | | |
|---------------------------|---|---|-----------------|--------|--------|------------------------|--------|
| N_{oc} Note2 | Config 1,2 | | dBm/SCS | -93 | | Same as Noc for 15 kHz | |
| | Config 3 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | | -90 | | -113 | |
| | | NR_FDD_FR1_B | | | | -112.5 | |
| | | NR_TDD_FR1_C | | | | -112 | |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -111.5 | |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -111 | |
| | | NR_FDD_FR1_G | | | | -110 | |
| | | NR_FDD_FR1_H | | | | -109.5 | |
| \hat{E}_s / I_{ot} | | | dB | 0 | -3.19 | -5.46 | -5.46 |
| \hat{E}_s / N_{oc} | | | dB | 4.54 | 2.66 | -4 | -4 |
| SS-RSRP ^{Not e3} | Config 1,2 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | dBm/SCS | -88.46 | -90.34 | -120 | -120 |
| | | NR_FDD_FR1_B | | | | -119.5 | -119.5 |
| | | NR_TDD_FR1_C | | | | -119 | -119 |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -118.5 | -118.5 |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -118 | -118 |
| | | NR_FDD_FR1_G | | | | -117 | -117 |
| | | NR_FDD_FR1_H | | | | -116.5 | -116.5 |
| | Config 3 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | -85.46 | -87.34 | -117 | -117 | |
| | | NR_FDD_FR1_B | | | -116.5 | -116.5 | |
| | | NR_TDD_FR1_C | | | -116 | -116 | |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | -115.5 | -115.5 | |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | -115 | -115 | |
| | | NR_FDD_FR1_G | | | -114 | -114 | |
| | | NR_FDD_FR1_H | | | -113.5 | -113.5 | |
| SS-SINR ^{Note3} | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | | dB | 0 | -3.19 | -5.46 | -5.46 |
| | NR_FDD_FR1_B | | | | | | |
| | NR_TDD_FR1_C | | | | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | | | |
| | NR_FDD_FR1_G | | | | | | |
| | NR_FDD_FR1_H | | | | | | |
| I_o ^{Note3} | Config 1,2 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | dBm/ 9.36MHz | -57.5 | | -85.51 | |
| | | NR_FDD_FR1_B | | | | -85.01 | |
| | | NR_TDD_FR1_C | | | | -84.51 | |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -84.01 | |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -83.51 | |
| | | NR_FDD_FR1_G | | | | -82.51 | |

| | | | | | |
|--|--|---|------------------|--------|--------|
| | | NR_FDD_FR1_H | | | -82.01 |
| Config 3 | | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 | dBm/ 38.16MHz | -51.41 | -79.41 |
| | | NR_FDD_FR1_B | | | -78.91 |
| | | NR_TDD_FR1_C | | | -78.41 |
| | | NR_FDD_FR1_D, NR_TDD_FR1_D | | | -77.91 |
| | | NR_FDD_FR1_E, NR_TDD_FR1_E | | | -77.41 |
| | | NR_FDD_FR1_G | | | -76.41 |
| | | NR_FDD_FR1_H | | | -75.91 |
| | | Propagation condition | | | - |
| Antenna configuration | | - | 1x2 | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-SINR, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 5: NR operating band groups are as defined in clause 3.5.2.</p> <p>Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification</p> | | | | | |

A.6.7.3.1.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.12.1.1.

A.6.7.3.2 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.14.1.1 and 10.1.14.1.2.

A.6.7.3.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.6.7.3.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test parameters in Table A.6.7.3.2.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.6.7.3.2.2-1: SS-SINR Inter frequency SS-SINR supported test configurations

| Config | Description |
|--|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations | |

Table A.6.7.3.2.2-2: SS-SINR Inter frequency test parameters

| Parameter | Unit | Test 1 | Test 2 | Test 3 |
|-----------|------|--------|--------|--------|
|-----------|------|--------|--------|--------|

| | | | Cell 1 | Cell 2 | Cell 1 | Cell 2 | Cell 1 | Cell 2 |
|--|------------|-----|----------------|--------|-------------|--------|-------------|--------|
| SSB ARFCN | | | freq1 | freq2 | freq1 | freq2 | freq1 | freq2 |
| Duplex mode | Config 1 | | FDD | | | | | |
| | Config 2,3 | | TDD | | | | | |
| TDD configuration | Config 1 | | Not Applicable | | | | | |
| | Config 2 | | TDDConf.1.1 | | | | | |
| | Config 3 | | TDDConf.2.1 | | | | | |
| Downlink initial BWP configuration | | | DLBWP.0.1 | | | | | |
| Downlink dedicated BWP configuration | | | DLBWP.1.1 | | | | | |
| Uplink initial BWP configuration | | | ULBWP.0.1 | | | | | |
| Uplink dedicated BWP configuration | | | ULBWP.1.1 | | | | | |
| DRX Cycle configuration | | ms | Not Applicable | | | | | |
| TRS configuration | Config 1 | | TRS.1.1 FDD | | | | | |
| | Config 2 | | TRS.1.1 TDD | | | | | |
| | Config 3 | | TRS.1.2 TDD | | | | | |
| PDSCH Reference measurement channel | Config 1 | | SR.1.1 FDD | | SR.1.1 FDD | | SR.1.1 FDD | |
| | Config 2 | | SR.1.1 TDD | - | SR.1.1 TDD | - | SR.1.1 TDD | - |
| | Config 3 | | SR2.1 TDD | | SR2.1 TDD | | SR2.1 TDD | |
| RMSI CORESET Reference Channel | Config 1 | | CR.1.1 FDD | - | R.1.1 FDD | - | CR.1.1 FDD | |
| | Config 2 | | CR.1.1 TDD | | CR.1.1 TDD | | CR.1.1 TDD | |
| | Config 3 | | CR2.1 TDD | | CR2.1 TDD | | CR2.1 TDD | |
| Dedicated CORESET Reference Channel | Config 1 | | CCR.1.1 FDD | | CCR.1.1 FDD | | CCR.1.1 FDD | |
| | Config 2 | | CCR.1.1 TDD | - | CCR.1.1 TDD | - | CCR.1.1 TDD | - |
| | Config 3 | | CCR2.1 TDD | | CCR2.1 TDD | | CCR2.1 TDD | |
| OCNG Patterns | | | OP.1 | | | | | |
| SS-RSSI-Measurement | | | Not Applicable | | | | | |
| Time offset with Cell 1 | Config 1 | ms | - | 3 | - | 3 | - | 3 |
| | Config 2,3 | µs | - | 3 | - | 3 | - | 3 |
| SMTC configuration | Config 1 | | SMTC pattern 2 | | | | | |
| | Config 2,3 | | SMTC pattern 1 | | | | | |
| SSB configuration | Config 1,2 | | SSB.1 FR1 | | | | | |
| | Config 3 | | SSB.2 FR1 | | | | | |
| PDSCH/PDCCH subcarrier spacing | Config 1,2 | | 15 | | | | | |
| | Config 3 | kHz | 30 | | | | | |
| EPRE ratio of PSS to SSS | | | | | | | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | 0 | 0 | 0 | 0 | 0 | 0 |

| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | | | |
|--|-----------------|--|-----------|--------|--------|----------------------------|------|------|
| N_{oc} Note2 | Config 1,2 | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | dBm/15kHz | -88 | -108.5 | -119.5 | | |
| | | NR_FDD_FR1_B | | | | -119 | | |
| | | NR_TDD_FR1_C | | | | -118.5 | | |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | -118 | | |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | -117.5 | | |
| | | NR_FDD_FR1_G | | | | -116.5 | | |
| | | NR_FDD_FR1_H | | | | -116 | | |
| N_{oc} Note2 | Config 1,2 N | | dBm/15kHz | -88 | -108.5 | Same as Noc for 15kHz T | | |
| | | | | | | | | |
| | Config 3 | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | dBm/15kHz | -85 | -105.5 | -116.5 | | |
| | | NR_FDD_FR1_B | | | | -116 | | |
| | | NR_TDD_FR1_C | | | | -115.5 | | |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | -115 | | |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | -114.5 | | |
| NR_FDD_FR1_G | -114.5 | | | | | | | |
| NR_FDD_FR1_H | -113 | | | | | | | |
| \hat{E}_s/I_{ot} | | | | | | | | |
| | | dB | -1.75 | -1.75 | 20 | 20 | -4.0 | -4.0 |
| \hat{E}_s/N_{oc} | | | | | | | | |
| | | dB | -1.75 | | 20 | | -4.0 | |
| SS- RSRP Note3 | Config 1,2 | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | dBm/SCS | -89.75 | -88.5 | -123.5 | | |
| | | NR_FDD_FR1_B | | | | -123 | | |
| | | NR_TDD_FR1_C | | | | -122.5 | | |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | -122 | | |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | -121.5 | | |
| | | NR_FDD_FR1_G | | | | -120.5 | | |
| | | NR_FDD_FR1_H | | | | -120 | | |
| | Config 3 | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | dBm/SCS | -86.75 | -85.5 | -120.5 | | |
| | | NR_FDD_FR1_B | | | | -120 | | |
| | | NR_TDD_FR1_C | | | | -119.5 | | |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | -119 | | |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | -118.5 | | |
| | | NR_FDD_FR1_G | | | | -117.5 | | |
| | | NR_FDD_FR1_H | | | | -117 | | |

| | | | | | | |
|---|------------|--|------------------|--------|--------|--------|
| SS-SINR ^{Note3} | | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | dB | -1.75 | 20 | -4.0 |
| | | NR_FDD_FR1_B | | | | |
| | | NR_TDD_FR1_C | | | | |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | |
| | | NR_FDD_FR1_G | | | | |
| | | NR_FDD_FR1_H | | | | |
| I _o ^{Note3} | Config 1,2 | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | dBm/ 9.36MHz | -57.83 | -60.5 | -90.09 |
| | | NR_FDD_FR1_B | | | | -89.59 |
| | | NR_TDD_FR1_C | | | | -89.09 |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | -88.59 |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | -88.09 |
| | | NR_FDD_FR1_G | | | | -87.09 |
| | | NR_FDD_FR1_H | | | | -86.59 |
| | Config 3 | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | dBm/ 38.16MHz | -51.73 | -54.41 | -84 |
| | | NR_FDD_FR1_B | | | | -83.5 |
| | | NR_TDD_FR1_C | | | | -83 |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | -82.5 |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | -82 |
| | | NR_FDD_FR1_G | | | | -81 |
| | | NR_FDD_FR1_H | | | | -80.5 |
| Propagation condition | | | - | AWGN | | |
| Antenna configuration | | | - | 1x2 | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-SINR, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 5: NR operating band groups are as defined in clause 3.5.2.</p> <p>Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification</p> | | | | | | |

A.6.7.3.2.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.14.1.1 and 10.1.14.1.2.

A.6.7.4 L1-RSRP measurement for beam reporting

A.6.7.4.1 SSB based L1-RSRP measurement

A.6.7.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.5.2 and clause 10.1.19.1 for L1-RSRP measurements based on SSB with the testing configurations for NR cells in Table A.6.7.4.1.1-1.

Table A.6.7.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

| Config | Description |
|--------|---|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations in each supported band |

A.6.7.4.1.2 Test parameters

In this set of test cases there one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.7.4.1.2-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.6.7.4.1.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources. UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSB resources 0 and 1.

Table A.6.7.4.1.2-1: FR1 SSB based L1-RSRP test parameters

| Parameter | Config | Unit | Test 1 | Test 2 | |
|---|-------------------------------|--------|-----------------------------|-----------------------------|---|
| SSB GSCN | 1~3 | | freq1 | freq1 | |
| Duplex mode | 1 | | FDD | FDD | |
| | 2 | | TDD | TDD | |
| | 3 | | TDD | TDD | |
| TDD Configuration | 1 | | N/A | N/A | |
| | 2 | | TDDConf.1.1 | TDDConf.1.1 | |
| | 3 | | TDDConf.2.1 | TDDConf.2.1 | |
| BW _{channel} | 1 | MHz | 10: N _{RB,c} = 52 | 10: N _{RB,c} = 52 | |
| | 2 | | 10: N _{RB,c} = 52 | 10: N _{RB,c} = 52 | |
| | 3 | | 40: N _{RB,c} = 106 | 40: N _{RB,c} = 106 | |
| PDSCH Reference measurement channel | 1 | | SR.1.1 FDD | SR.1.1 FDD | |
| | 2 | | SR.1.1 TDD | SR.1.1 TDD | |
| | 3 | | SR.2.1 TDD | SR.2.1 TDD | |
| RMSI CORESET Reference Channel | 1 | | CR.1.1 FDD | CR.1.1 FDD | |
| | 2 | | CR.1.1 TDD | CR.1.1 TDD | |
| | 3 | | CR.2.1 TDD | CR.2.1 TDD | |
| Dedicated CORESET Reference Channel | 1 | | CCR.1.1 FDD | CCR.1.1 FDD | |
| | 2 | | CCR.1.1 TDD | CCR.1.1 TDD | |
| | 3 | | CCR.2.1 TDD | CCR.2.1 TDD | |
| SSB configuration | 1 | | SSB.3 FR1 | SSB.3 FR1 | |
| | 2 | | SSB.3 FR1 | SSB.3 FR1 | |
| | 3 | | SSB.4 FR1 | SSB.4 FR1 | |
| OCNG Patterns | 1~3 | | OP.1 | OP.1 | |
| Initial BWP Configuration | 1~3 | | DLBWP.0.1 ULBWP.0.1 | DLBWP.0.1 ULBWP.0.1 | |
| TRS configuration | 1 | | TRS.1.1 FDD | TRS.1.1 FDD | |
| | 2 | | TRS.1.1 TDD | TRS.1.1 TDD | |
| | 3 | | TRS.1.2 TDD | TRS.1.2 TDD | |
| Dedicated BWP configuration | 1~3 | | DLBWP.1.1 ULBWP.1.1 | DLBWP.1.1 ULBWP.1.1 | |
| SMTC configuration | 1~3 | | SMTC.1 | SMTC.1 | |
| reportConfigType | 1~3 | | periodic | periodic | |
| reportQuantity | 1~3 | | ssb-Index-RSRP | ssb-Index-RSRP | |
| Number of reported RS | 1~3 | | 2 | 2 | |
| L1-RSRP reporting period | 1~3 | | slot80 | slot80 | |
| EPRE ratio of PSS to SSS | 1~3 | dB | 0 | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | | | |
| N_{oc} Note2 | | | | | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 |
| | NR_FDD_FR1_B | -116.5 | | | |
| | NR_TDD_FR1_C | -116 | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | -115.5 | | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | -115 | | | |

| | | | | | |
|----------------------|---|--------|-----------------|--------|--------|
| | NR_FDD_FR1_G | | | | -114 |
| | NR_FDD_FR1_H | | | | -113.5 |
| N_{oc} Note2 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 1,2 | dBm/SSB SCS | -94.65 | -117 |
| | NR_FDD_FR1_B | | | | -116.5 |
| | NR_TDD_FR1_C | | | | -116 |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -115.5 |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -115 |
| | NR_FDD_FR1_G | | | | -114 |
| | NR_FDD_FR1_H | -113.5 | | | |
| | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 3 | | -91.65 | -114 |
| | NR_FDD_FR1_B | | | | -113.5 |
| | NR_TDD_FR1_C | | | | -114 |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -112.5 |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -112 |
| | NR_FDD_FR1_G | | | | -111 |
| | NR_FDD_FR1_H | -110.5 | | | |
| \hat{E}_s/I_{ot} | | 1~3 | dB | 10 | -3 |
| SSB RSRP Note3 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 1,2 | dBm/SSB SCS | -84.65 | -120 |
| | NR_FDD_FR1_B | | | | -119.5 |
| | NR_TDD_FR1_C | | | | -119 |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -118.5 |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -118 |
| | NR_FDD_FR1_G | | | | -117 |
| | NR_FDD_FR1_H | -116.5 | | | |
| | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 3 | | -81.65 | -117 |
| | NR_FDD_FR1_B | | | | -116.5 |
| | NR_TDD_FR1_C | | | | -116 |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -115.5 |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -115 |
| | NR_FDD_FR1_G | | | | -114 |
| | NR_FDD_FR1_H | -113.5 | | | |
| I_o Note3 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 1,2 | dBm/9.36 MHz | -56.28 | -87.28 |
| | NR_FDD_FR1_B | | | | -86.78 |
| | NR_TDD_FR1_C | | | | -86.28 |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -85.78 |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -85.28 |
| | NR_FDD_FR1_G | | | | -84.28 |
| | NR_FDD_FR1_H | | | | -83.78 |

| | | | | |
|---|--|------------------|--------|--------|
| NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 3 | dBm/38.16 MHz | -50.19 | -81.19 |
| NR_FDD_FR1_B | | | | -80.69 |
| NR_TDD_FR1_C | | | | -80.19 |
| NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -79.69 |
| NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -79.19 |
| NR_FDD_FR1_G | | | | -78.19 |
| NR_FDD_FR1_H | | | | -77.69 |
| \hat{E}_s / N_{oc} | 1~3 | dB | 10 | -3 |
| Propagation condition | 1~3 | | AWGN | AWGN |
| Antenna configuration | 1~3 | | 1x2 | 1x2 |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | |
| Note 3: | RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | |
| Note 4: | RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | |
| Note 5: | The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification. | | | |

A.6.7.4.1.3 Test Requirements

The L1-RSRP measurement accuracy for SSB#0 and SSB#1 of Cell 2 shall fulfil the requirements in clauses 10.1.19.1.

A.6.7.4.2 CSI-RS based L1-RSRP measurement on resource set with repetition off

A.6.7.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.5.3 and clause 10.1.19.2 for L1-RSRP measurements based on CSI-RS with the testing configurations for NR cells in Table A.6.7.4.2.1-1.

Table A.6.7.4.2.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

| Config | Description |
|--------|---|
| 1 | NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations in each supported band |

A.6.7.4.2.2 Test parameters

In this set of test cases there are one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.7.4.2.2-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.6.7.4.2.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB.

Table A.6.7.4.2.2-1: FR1 CSI-RS based L1-RSRP test parameters

| Parameter | Config | Unit | Test 1 | Test 2 | |
|---|---|------|-----------------------------|-----------------------------|--------|
| SSB GSCN | 1~3 | | freq1 | freq1 | |
| Duplex mode | 1 | | FDD | FDD | |
| | 2 | | TDD | TDD | |
| | 3 | | TDD | TDD | |
| TDD Configuration | 1 | | N/A | N/A | |
| | 2 | | TDDConf.1.1 | TDDConf.1.1 | |
| | 3 | | TDDConf.2.1 | TDDConf.2.1 | |
| BW _{channel} | 1 | MHz | 10: N _{RB,c} = 52 | 10: N _{RB,c} = 52 | |
| | 2 | | 10: N _{RB,c} = 52 | 10: N _{RB,c} = 52 | |
| | 3 | | 40: N _{RB,c} = 106 | 40: N _{RB,c} = 106 | |
| PDSCH Reference measurement channel | 1 | | SR.1.1 FDD | SR.1.1 FDD | |
| | 2 | | SR.1.1 TDD | SR.1.1 TDD | |
| | 3 | | SR.2.1 TDD | SR.2.1 TDD | |
| RMSI CORESET Reference Channel | 1 | | CR.1.1 FDD | CR.1.1 FDD | |
| | 2 | | CR.1.1 TDD | CR.1.1 TDD | |
| | 3 | | CR.2.1 TDD | CR.2.1 TDD | |
| Dedicated CORESET Reference Channel | 1 | | CCR.1.1 FDD | CCR.1.1 FDD | |
| | 2 | | CCR.1.1 TDD | CCR.1.1 TDD | |
| | 3 | | CCR.2.1 TDD | CCR.2.1 TDD | |
| SSB configuration | 1 | | SSB.1 FR1 | SSB.1 FR1 | |
| | 2 | | SSB.1 FR1 | SSB.1 FR1 | |
| | 3 | | SSB.2 FR1 | SSB.2 FR1 | |
| OCNG Patterns | 1~3 | | OP.1 | OP.1 | |
| TRS configuration | 1 | | TRS.1.1 FDD | TRS.1.1 FDD | |
| | 2 | | TRS.1.1 TDD | TRS.1.1 TDD | |
| | 3 | | TRS.1.2 TDD | TRS.1.2 TDD | |
| Initial BWP Configuration | 1~3 | | DLBWP.0.1 ULBWP.0.1 | DLBWP.0.1 ULBWP.0.1 | |
| Dedicated BWP configuration | 1~3 | | DLBWP.1.1 ULBWP.1.1 | DLBWP.1.1 ULBWP.1.1 | |
| SMTC configuration | 1~3 | | SMTC.1 | SMTC.1 | |
| CSI-RS | 1 | | CSI-RS 1.2 FDD | CSI-RS 1.2 FDD | |
| | 2 | | CSI-RS 1.2 TDD | CSI-RS 1.2 TDD | |
| | 3 | | CSI-RS 2.2 TDD | CSI-RS 2.2 FDD | |
| reportConfigType | 1~3 | | periodic | periodic | |
| reportQuantity | 1~3 | | cri-RSRP | cri-RSRP | |
| Number of reported RS | 1~3 | | 2 | 2 | |
| L1-RSRP reporting period | 1~3 | | slot80 | slot80 | |
| EPRE ratio of PSS to SSS | 1~3 | dB | 0 | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | | | |
| N_{oc} Note2 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 1~3 | dBm/15kHz | -94.65 | -117 |
| | NR_FDD_FR1_B | | | | -116.5 |
| | NR_TDD_FR1_C | | | | -116 |

| | | | | | | | |
|---|---|---|-------------------|-----------------|-------------------|--------|--------|
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -115.5 | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -115 | | |
| | NR_FDD_FR1_G | | | | -114 | | |
| | NR_FDD_FR1_H | | | | -113.5 | | |
| N_{oc} Note2 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 1,2 | dBm/CSI-RS SCS | -94.65 | -117 | | |
| | NR_FDD_FR1_B | | | | -116.5 | | |
| | NR_TDD_FR1_C | | | | -116 | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -115.5 | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -115 | | |
| | NR_FDD_FR1_G | | | | -114 | | |
| | NR_FDD_FR1_H | -113.5 | | | | | |
| | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 3 | | -91.65 | -114 | | |
| | NR_FDD_FR1_B | | | | -113.5 | | |
| | NR_TDD_FR1_C | | | | -114 | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -112.5 | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -112 | | |
| | NR_FDD_FR1_G | | | | -111 | | |
| | NR_FDD_FR1_H | -110.5 | | | | | |
| | \hat{E}_s/I_{tot} | | | 1~3 | dB | 10 | -3 |
| | CSI-RS RSRP Note3 | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | | 1,2 | dBm/CSI-RS SCS | -84.65 | -120 |
| NR_FDD_FR1_B | | -119.5 | | | | | |
| NR_TDD_FR1_C | | -119 | | | | | |
| NR_FDD_FR1_D, NR_TDD_FR1_D | | -118.5 | | | | | |
| NR_FDD_FR1_E, NR_TDD_FR1_E | | -118 | | | | | |
| NR_FDD_FR1_G | | -117 | | | | | |
| NR_FDD_FR1_H | | -116.5 | | | | | |
| NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | | 3 | -81.65 | -117 | | | |
| NR_FDD_FR1_B | | | | -116.5 | | | |
| NR_TDD_FR1_C | | | | -116 | | | |
| NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -115.5 | | | |
| NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -115 | | | |
| NR_FDD_FR1_G | | | | -114 | | | |
| NR_FDD_FR1_H | | -113.5 | | | | | |
| I_o Note3 | | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 1,2 | dBm/9.36 MHz | | -56.28 | -87.28 |
| | | NR_FDD_FR1_B | | | | | -86.78 |
| | NR_TDD_FR1_C | -86.28 | | | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | -85.78 | | | | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | -85.28 | | | | | |

| | | | | | |
|--|---|-----|------------------|--------|--------|
| | NR_FDD_FR1_G | | | | -84.28 |
| | NR_FDD_FR1_H | | | | -83.78 |
| | NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 | 3 | dBm/38.16 MHz | -50.19 | -81.19 |
| | NR_FDD_FR1_B | | | | -80.69 |
| | NR_TDD_FR1_C | | | | -80.19 |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | -79.69 |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | -79.19 |
| | NR_FDD_FR1_G | | | | -78.19 |
| | NR_FDD_FR1_H | | | | -77.69 |
| | \hat{E}_s/N_{oc} | | | | 1~3 |
| | Propagation condition | 1~3 | | AWGN | AWGN |
| | Antenna configuration | 1~3 | | 1x2 | 1x2 |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.</p> | | | | | |

A.6.7.4.2.3 Test Requirements

The L1-RSRP measurement accuracy for CSI-RS#0 and CSI-RS#1 of Cell 1 shall fulfil the requirements in clause 10.1.19.2.

A.6.7.5 E-UTRAN RSRP

A.6.7.5.1 SA: inter-RAT measurement accuracy with FR1 serving cell

A.6.7.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the E-UTRAN RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.2.2 for SA inter-RAT E-UTRAN RSRP measurements.

A.6.7.5.1.2 Test parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an E-UTRAN inter-RAT neighbour cell. Supported test configurations are shown in table A.6.7.5.1.2-1. The measurement accuracy of SA inter-RAT E-UTRAN RSRP are tested by using the parameters in A.6.7.5.1.2-2 and A.6.7.5.1.2-3.

Table A.6.7.5.1.2-1: Inter-RAT E-UTRAN RSRP supported test configurations with FR1 serving cell

| Configuration | Description |
|----------------------|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN FDD |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN FDD |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, E-UTRAN FDD |
| 4 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN TDD |
| 5 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN TDD |
| 6 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, E-UTRAN TDD |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.6.7.5.1.2-2: NR Cell specific test parameters for SA Inter-RAT E-UTRAN RSRP test parameters

| Parameter | | Unit | Cell 1 |
|--|-------------------|---------------|----------------------------|
| NR RF channel number | | | 1 |
| Duplex mode | Config 1, 4 | | FDD |
| | Config 2, 3, 5, 6 | | TDD |
| TDD Configuration | Config 1, 4 | | N/A |
| | Config 2, 5 | | TDDConf.1.1 |
| | Config 3, 6 | | TDDConf.1.2 |
| BW_{channel} | Config 1, 4 | MHz | 10: $N_{RB,c} = 52$ (FDD) |
| | Config 2, 5 | | 10: $N_{RB,c} = 52$ (TDD) |
| | Config 3, 6 | | 40: $N_{RB,c} = 106$ (TDD) |
| Gap pattern Id | | | 0 |
| PDSCH reference measurement channel | Config 1, 4 | | SR.1.1 FDD |
| | Config 2, 5 | | SR.1.1 TDD |
| | Config 3, 6 | | SR.2.1 TDD |
| CORSET reference channel | Config 1, 4 | | CR.1.1 FDD |
| | Config 2, 5 | | CR.1.1 TDD |
| | Config 3, 6 | | CR.2.1 TDD |
| BWP configurations | Initial DL BWP | | DLBWP.0.1 |
| | Dedicated DL BWP | | DLBWP.1.1 |
| | Initial UL BWP | | ULBWP.0.1 |
| | Dedicated UL BWP | | ULBWP.1.1 |
| OCNG pattern ^{Note1} | | | OP.1 |
| SMTC configuration | | | SMTC.1 |
| SSB configuration | Config 1, 2, 4, 5 | | SSB.1 FR1 |
| | Config 3, 6 | | SSB.2 FR1 |
| EPRE ratio of PSS to SSS | | dB | 0 |
| EPRE ratio of PBCH_DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | |
| EPRE ratio of OCNG DMRS to SSS | | | |
| EPRE ratio of OCNG to OCNG DMRS | | | |
| N_{oc} ^{Note2} | | dBm/15 kHz | -104 |
| N_{oc} ^{Note2} | Config 1, 2, 4, 5 | dBm/SCS | -104 |
| | Config 3, 6 | | -101 |
| \hat{E}_s/N_{oc} | | dB | 17 |
| \hat{E}_s/I_{ot} ^{Note3} | | dB | 17 |
| SS-RSRP ^{Note3} | Config 1, 2, 4, 5 | dBm/SCS | -87 |
| | Config 3, 6 | | -84 |
| SSB_RP ^{Note3} | Config 1, 2, 4, 5 | dBm/SCS | -87 |
| | Config 3, 6 | | -84 |
| I_o ^{Note3} | Config 1, 2, 4, 5 | dBm/9.36 MHz | -58.96 |
| | Config 3, 6 | dBm/38.16 MHz | -52.87 |
| Propagation condition | | | AWGN |
| Antenna Configuration and Correlation Matrix | | | 1x2 |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |
| Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | |
| Note 3: \hat{E}_s/I_{ot} , SS-RSRP, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | |

Table A.6.7.5.1.2-3: E-UTRAN Cell specific test parameters for SA Inter-RAT E-UTRAN RSRP test parameters

| Parameter | | Unit | Cell 2 | |
|---|---|-----------|--|--------|
| | | | Test 1 | Test 2 |
| E-UTRA RF channel number | | | 1 | |
| Duplex mode | Config 1, 2, 3 | | FDD | |
| | Config 4, 5, 6 | | TDD | |
| TDD special subframe configuration ^{Note1} | Config 1, 2, 3 | | N/A | |
| | Config 4, 5, 6 | | 6 | |
| TDD uplink-downlink configuration ^{Note1} | Config 1, 2, 3 | | N/A | |
| | Config 4, 5, 6 | | 1 | |
| BW _{channel} | | MHz | 5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100 | |
| PDSCH parameters: DL Reference Measurement Channel ^{Note2} | | | - | |
| PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2} | Config 1, 2, 3 | | 5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD | |
| | Config 4, 5, 6 | | 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD | |
| OCNG Patterns ^{Note2} | Config 1, 2, 3 | | 5 MHz: OP.19 FDD 10 MHz: OP.6 FDD 20 MHz: OP.14 FDD | |
| | Config 4, 5, 6 | | 5 MHz: OP.10 TDD 10 MHz: OP.2 TDD 20 MHz: OP.8 TDD | |
| PBCH_RA | | dB | 0 | |
| PBCH_RB | | | | |
| PSS_RA | | | | |
| SSS_RA | | | | |
| PCFICH_RB | | | | |
| PHICH_RA | | | | |
| PHICH_RB | | | | |
| PDCCH_RA | | | | |
| PDCCH_RB | | | | |
| PDSCH_RA | | | | |
| PDSCH_RB | | | | |
| OCNG_RA ^{Note3} | | | | |
| OCNG_RB ^{Note3} | | | | |
| N _{oc} ^{Note4} | Bands FDD_A ^{Note 9} , TDD_A | | | |
| | Bands FDD_B1, FDD_B2 ^{Note 10} | -116.5 | | |
| | Bands FDD_C, TDD_C | -116 | | |
| | Bands FDD_D | -115.5 | | |
| | Bands FDD_E, FDD_F ^{Note 7} , TDD_E | -115 | | |
| | Bands FDD_G ^{Note 8} | -114 | | |
| | Bands FDD_H | | | -113.5 |
| \hat{E}_s/N_{oc} | | dB | 10 | -4 |
| \hat{E}_s/I_{ot} ^{Note5} | | dB | 10 | -4 |
| RSRP ^{Note5} | Bands FDD_A ^{Note 9} , TDD_A | dBm/15kHz | -81.65 | -121 |
| | Bands FDD_B1, FDD_B2 ^{Note 10} | | | -120.5 |
| | Bands FDD_C, TDD_C | | | -120 |
| | Bands FDD_D | | | -119.5 |

| | | | | |
|---|--|-----------|--|--|
| | Bands FDD_E, FDD_F Note 7, TDD_E | | | -119 |
| | Bands FDD_G Note 8 | | | -118 |
| | Bands FDD_H | | | -117.5 |
| SCH_RP ^{Note5} | Bands FDD_A ^{Note 9} , TDD_A | dBm/15kHz | -81.65 | -121 |
| | Bands FDD_B1, FDD_B2 ^{Note 10} | | | -120.5 |
| | Bands FDD_C, TDD_C | | | -120 |
| | Bands FDD_D | | | -119.5 |
| | Bands FDD_E, FDD_F Note 7, TDD_E | | | -119 |
| | Bands FDD_G Note 8 | | | -118 |
| | Bands FDD_H | | | -117.5 |
| I _o ^{Note5} | Bands FDD_A ^{Note 9} , TDD_A | dBm/Ch BW | -53.45 + 10log(N _{RB,c} /50) | -87.76 + 10log(N _{RB,c} /50) |
| | Bands FDD_B1, FDD_B2 ^{Note 10} | | | -87.26 + 10log(N _{RB,c} /50) |
| | Bands FDD_C, TDD_C | | | -86.76 + 10log(N _{RB,c} /50) |
| | Bands FDD_D | | | -86.26 + 10log(N _{RB,c} /50) |
| | Bands FDD_E, FDD_F Note 7, TDD_E | | | -85.76 + 10log(N _{RB,c} /50) |
| | Bands FDD_G Note 8 | | | -84.76 + 10log(N _{RB,c} /50) |
| | Bands FDD_H | | | -84.26 + 10log(N _{RB,c} /50) |
| Propagation Condition | | | | AWGN |
| Antenna Configuration and Correlation Matrix | | | | 1x2 |
| <p>Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].</p> <p>Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.</p> <p>Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 5: \hat{E}_s/I_{ot}, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 6: E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [15].</p> <p>Note 7: For Band 26, the tests shall be performed with the carrier frequency of assigned E-UTRA channel bandwidth within 865-894 MHz.</p> <p>Note 8: Except Band 29.</p> <p>Note 9: Except Band 32, Band 75 and Band 76.</p> <p>Note 10: For Band 74, the tests shall be performed with the carrier frequency of the assigned E-UTRA channel bandwidth within 1475.9-1510.9 MHz.</p> | | | | |

A.6.7.5.1.3 Test Requirements

The SA inter-RAT E-UTRAN RSRP measurement accuracy for cell 2 shall fulfil absolute requirement in clause 10.2.2.

A.6.7.6 E-UTRAN RSRQ

A.6.7.6.1 SA: inter-RAT measurement accuracy with FR1 serving cell

A.6.7.6.1.1 Test Purpose and Environment

The purpose of this test is to verify that the E-UTRAN RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.2.3 for SA inter-RAT E-UTRAN RSRQ measurements.

A.6.7.6.1.2 Test parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an E-UTRAN inter-RAT neighbour cell. Supported test configurations are shown in table A.6.7.6.1.2-1. The measurement accuracy of SA inter-RAT E-UTRAN RSRQ are tested by using the parameters in A.6.7.6.1.2-2 and A.6.7.6.1.2-3.

Table A.6.7.6.1.2-1: Inter-RAT E-UTRAN RSRQ supported test configurations with FR1 serving cell

| Configuration | Description |
|---------------|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN FDD |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN FDD |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, E-UTRAN FDD |
| 4 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN TDD |
| 5 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN TDD |
| 6 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, E-UTRAN TDD |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.6.7.6.1.2-2: NR Cell specific test parameters for SA Inter-RAT E-UTRAN RSRQ test parameters

| Parameter | | Unit | Cell 1 | |
|--|-------------------|---------------|-----------------------------------|--------|
| NR RF channel number | | | 1 | |
| Duplex mode | Config 1, 4 | | FDD | |
| | Config 2, 3, 5, 6 | | TDD | |
| TDD Configuration | Config 1, 4 | | N/A | |
| | Config 2, 5 | | TDDConf.1.1 | |
| | Config 3, 6 | | TDDConf.1.2 | |
| BW_{channel} | Config 1, 4 | MHz | 10: $N_{\text{RB,c}} = 52$ (FDD) | |
| | Config 2, 5 | | 10: $N_{\text{RB,c}} = 52$ (TDD) | |
| | Config 3, 6 | | 40: $N_{\text{RB,c}} = 106$ (TDD) | |
| Gap pattern Id | | | 0 | |
| PDSCH reference measurement channel | Config 1, 4 | | SR.1.1 FDD | |
| | Config 2, 5 | | SR.1.1 TDD | |
| | Config 3, 6 | | SR.2.1 TDD | |
| CORSET reference channel | Config 1, 4 | | CR.1.1 FDD | |
| | Config 2, 5 | | CR.1.1 TDD | |
| | Config 3, 6 | | CR.2.1 TDD | |
| BWP configurations | Initial DL BWP | | DLBWP.0.1 | |
| | Dedicated DL BWP | | DLBWP.1.1 | |
| | Initial UL BWP | | ULBWP.0.1 | |
| | Dedicated UL BWP | | ULBWP.1.1 | |
| OCNG pattern ^{Note1} | | | OP.1 | |
| SMTC configuration | | | SMTC.1 | |
| SSB configuration | Config 1, 2, 4, 5 | | SSB.1 FR1 | |
| | Config 3, 6 | | SSB.2 FR1 | |
| EPRE ratio of PSS to SSS | | dB | 0 | |
| EPRE ratio of PBCH_DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | | |
| EPRE ratio of OCNG DMRS to SSS | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | | | |
| N_{oc} ^{Note2} | | dBm/15 kHz | -104 | |
| N_{oc} ^{Note2} | Config 1, 2, 4, 5 | dBm/SCS | -104 | |
| | Config 3, 6 | | -101 | |
| \hat{E}_s/N_{oc} | | dB | 17 | 7 |
| \hat{E}_s/I_{ot} ^{Note3} | | dB | 17 | 7 |
| SS-RSRQ ^{Note3} | Config 1, 2, 4, 5 | dBm/SCS | -87 | -97 |
| | Config 3, 6 | | -84 | -94 |
| SSB_RP ^{Note3} | Config 1, 2, 4, 5 | dBm/SCS | -87 | -97 |
| | Config 3, 6 | | -84 | -94 |
| I_o ^{Note3} | Config 1, 2, 4, 5 | dBm/9.36 MHz | -58.96 | -68.26 |
| | Config 3, 6 | dBm/38.16 MHz | -52.87 | -62.17 |
| Propagation condition | | | AWGN | |
| Antenna Configuration and Correlation Matrix | | | 1x2 | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: \hat{E}_s/I_{ot}, SS-RSRQ, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | |

Table A.6.7.6.1.2-3: E-UTRAN Cell specific test parameters for SA Inter-RAT E-UTRAN RSRQ test parameters

| Parameter | | Unit | Cell 2 | | |
|---|---|-----------|--|---------|--------|
| | | | Test 1 | Test 2 | Test 3 |
| E-UTRA RF channel number | | | 1 | | |
| Duplex mode | Config 1, 2, 3 | | FDD | | |
| | Config 4, 5, 6 | | TDD | | |
| TDD special subframe configuration ^{Note1} | Config 1, 2, 3 | | N/A | | |
| | Config 4, 5, 6 | | 6 | | |
| TDD uplink-downlink configuration ^{Note1} | Config 1, 2, 3 | | N/A | | |
| | Config 4, 5, 6 | | 1 | | |
| BW _{channel} | | MHz | 5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100 | | |
| PDSCH parameters: DL Reference Measurement Channel ^{Note2} | | | - | | |
| PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2} | Config 1, 2, 3 | | 5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD | | |
| | Config 4, 5, 6 | | 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD | | |
| OCNG Patterns ^{Note2} | Config 1, 2, 3 | | 5 MHz: OP.19 FDD 10 MHz: OP.6 FDD 20 MHz: OP.14 FDD | | |
| | Config 4, 5, 6 | | 5 MHz: OP.10 TDD 10 MHz: OP.2 TDD 20 MHz: OP.8 TDD | | |
| PBCH_RA | | dB | 0 | | |
| PBCH_RB | | | | | |
| PSS_RA | | | | | |
| SSS_RA | | | | | |
| PCFICH_RB | | | | | |
| PHICH_RA | | | | | |
| PHICH_RB | | | | | |
| PDCCH_RA | | | | | |
| PDCCH_RB | | | | | |
| PDSCH_RA | | | | | |
| PDSCH_RB | | | | | |
| OCNG_RA ^{Note3} | | | | | |
| OCNG_RB ^{Note3} | | | | | |
| N _{oc} ^{Note4} | Bands FDD_A ^{Note 9} , TDD_A | | | | |
| | Bands FDD_B1, FDD_B2 ^{Note 10} | -119 | | | |
| | Bands FDD_C, TDD_C | -118.5 | | | |
| | Bands FDD_D | -118 | | | |
| | Bands FDD_E, FDD_F ^{Note 7} , TDD_E | -117.5 | | | |
| | Bands FDD_G ^{Note 8} | -116.5 | | | |
| | Bands FDD_H | | | | -116 |
| \hat{E}_s/N_{oc} | | dB | -1.75 | -4.0 | -4.0 |
| \hat{E}_s/I_{ot} ^{Note5} | | dB | -1.75 | -4.0 | -4.0 |
| RSRP ^{Note5} | Bands FDD_A ^{Note 9} , TDD_A | dBm/15kHz | -84.75 | -108.70 | -123.5 |
| | Bands FDD_B1, FDD_B2 ^{Note 10} | | | | -123 |
| | Bands FDD_C, TDD_C | | | | -122.5 |
| | Bands FDD_D | | | | -122 |

| | | | | | |
|---|--|--------------|--|---|---|
| | Bands FDD_E, FDD_F Note 7, TDD_E | | | | -121.5 |
| | Bands FDD_G Note 8 | | | | -120.5 |
| | Bands FDD_H | | | | -120 |
| RSRQ ^{Note5} | Bands FDD_A ^{Note 9} , TDD_A | dB | -14.76 | -16.25 | -16.25 |
| | Bands FDD_B1, FDD_B2 ^{Note 10} | | | | |
| | Bands FDD_C, TDD_C | | | | |
| | Bands FDD_D | | | | |
| | Bands FDD_E, FDD_F Note 7, TDD_E | | | | |
| | Bands FDD_G ^{Note 8} | | | | |
| | Bands FDD_H | | | | |
| I _o ^{Note5} | Bands FDD_A ^{Note 9} , TDD_A | dBm/Ch BW | -53 + 10log(N _{RB,c} /50) | -75.46 + 10log(N _{RB,c} /50) | -90.26 + 10log(N _{RB,c} /50) |
| | Bands FDD_B1, FDD_B2 ^{Note 10} | | | | -89.76 + 10log(N _{RB,c} /50) |
| | Bands FDD_C, TDD_C | | | | -89.26 + 10log(N _{RB,c} /50) |
| | Bands FDD_D | | | | -88.76 + 10log(N _{RB,c} /50) |
| | Bands FDD_E, FDD_F Note 7, TDD_E | | | | -88.26 + 10log(N _{RB,c} /50) |
| | Bands FDD_G ^{Note 8} | | | | -87.26 + 10log(N _{RB,c} /50) |
| | Bands FDD_H | | | | -86.76 + 10log(N _{RB,c} /50) |
| Propagation Condition | | AWGN | | | |
| Antenna Configuration and Correlation Matrix | | 1x2 | | | |
| <p>Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].</p> <p>Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.</p> <p>Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 5: \hat{E}_s/I_{ot}, RSRP, RSRQ and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 6: E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [15].</p> <p>Note 7: For Band 26, the tests shall be performed with the carrier frequency of assigned E-UTRA channel bandwidth within 865-894 MHz.</p> <p>Note 8: Except Band 29.</p> <p>Note 9: Except Band 32, Band 75 and Band 76.</p> <p>Note 10: For Band 74, the tests shall be performed with the carrier frequency of the assigned E-UTRA channel bandwidth within 1475.9-1510.9 MHz.</p> | | | | | |

A.6.7.6.1.3 Test Requirements

The SA inter-RAT E-UTRAN RSRQ measurement accuracy for cell 2 shall fulfil absolute requirement in clause 10.2.3.

A.6.7.7 E-UTRAN RS-SINR

A.6.7.7.1 SA: inter-RAT measurement accuracy with FR1 serving cell

A.6.7.7.1.1 Test Purpose and Environment

The purpose of this test is to verify that the E-UTRAN RS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.2.4 for SA inter-RAT E-UTRAN RS-SINR measurements.

A.6.7.7.1.2 Test parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an E-UTRAN inter-RAT neighbour cell. Supported test configurations are shown in table A.6.7.7.1.2-1. The measurement accuracy of SA inter-RAT E-UTRAN RS-SINR are tested by using the parameters in A.6.7.7.1.2-2 and A.6.7.7.1.2-3.

Table A.6.7.7.1.2-1: Inter-RAT E-UTRAN RS-SINR supported test configurations with FR1 serving cell

| Configuration | Description |
|---------------|--|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN FDD |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN FDD |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, E-UTRAN FDD |
| 4 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN TDD |
| 5 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN TDD |
| 6 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, E-UTRAN TDD |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.6.7.1.2-2: NR Cell specific test parameters for SA Inter-RAT E-UTRAN RS-SINR test parameters

| Parameter | | Unit | Cell 1 |
|--|-------------------|---------------|----------------------------|
| NR RF channel number | | | 1 |
| Duplex mode | Config 1, 4 | | FDD |
| | Config 2, 3, 5, 6 | | TDD |
| TDD Configuration | Config 1, 4 | | N/A |
| | Config 2, 5 | | TDDConf.1.1 |
| | Config 3, 6 | | TDDConf.1.2 |
| BW_{channel} | Config 1, 4 | MHz | 10: $N_{RB,c} = 52$ (FDD) |
| | Config 2, 5 | | 10: $N_{RB,c} = 52$ (TDD) |
| | Config 3, 6 | | 40: $N_{RB,c} = 106$ (TDD) |
| Gap pattern Id | | | 0 |
| PDSCH reference measurement channel | Config 1, 4 | | SR.1.1 FDD |
| | Config 2, 5 | | SR.1.1 TDD |
| | Config 3, 6 | | SR.2.1 TDD |
| CORSET reference channel | Config 1, 4 | | CR.1.1 FDD |
| | Config 2, 5 | | CR.1.1 TDD |
| | Config 3, 6 | | CR.2.1 TDD |
| BWP configurations | Initial DL BWP | | DLBWP.0.1 |
| | Dedicated DL BWP | | DLBWP.1.1 |
| | Initial UL BWP | | ULBWP.0.1 |
| | Dedicated UL BWP | | ULBWP.1.1 |
| OCNG pattern ^{Note1} | | | OP.1 |
| SMTC configuration | | | SMTC.1 |
| SSB configuration | Config 1, 2, 4, 5 | | SSB.1 FR1 |
| | Config 3, 6 | | SSB.2 FR1 |
| EPRE ratio of PSS to SSS | | dB | 0 |
| EPRE ratio of PBCH_DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | |
| EPRE ratio of OCNG DMRS to SSS | | | |
| EPRE ratio of OCNG to OCNG DMRS | | | |
| N_{oc} ^{Note2} | | dBm/15 kHz | -104 |
| N_{oc} ^{Note2} | Config 1, 2, 4, 5 | dBm/SCS | -104 |
| | Config 3, 6 | | -101 |
| \hat{E}_s/N_{oc} | | dB | 17 |
| \hat{E}_s/I_{ot} ^{Note3} | | dB | 17 |
| SS-RS-SINR ^{Note3} | Config 1, 2, 4, 5 | dBm/SCS | -87 |
| | Config 3, 6 | | -84 |
| SSB_RP ^{Note3} | Config 1, 2, 4, 5 | dBm/SCS | -87 |
| | Config 3, 6 | | -84 |
| I_o ^{Note3} | Config 1, 2, 4, 5 | dBm/9.36 MHz | -58.96 |
| | Config 3, 6 | dBm/38.16 MHz | -52.87 |
| Propagation condition | | | AWGN |
| Antenna Configuration and Correlation Matrix | | | 1x2 |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |
| Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | |
| Note 3: \hat{E}_s/I_{ot} , SS-RS-SINR, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | |

Table A.6.7.7.1.2-3: E-UTRAN Cell specific test parameters for SA Inter-RAT E-UTRAN RS-SINR test parameters

| Parameter | | Unit | Cell 2 | | |
|---|---|-----------|--|---------|----------------|
| | | | Test 1 | Test 2 | Test 3 |
| E-UTRA RF channel number | | | 1 | | |
| Duplex mode | Config 1, 2, 3 | | FDD | | |
| | Config 4, 5, 6 | | TDD | | |
| TDD special subframe configuration ^{Note1} | Config 1, 2, 3 | | N/A | | |
| | Config 4, 5, 6 | | 6 | | |
| TDD uplink-downlink configuration ^{Note1} | Config 1, 2, 3 | | N/A | | |
| | Config 4, 5, 6 | | 1 | | |
| BW _{channel} | | MHz | 5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100 | | |
| PDSCH parameters: DL Reference Measurement Channel ^{Note2} | | | - | | |
| PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2} | Config 1, 2, 3 | | 5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD | | |
| | Config 4, 5, 6 | | 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD | | |
| OCNG Patterns ^{Note2} | Config 1, 2, 3 | | 5 MHz: OP.19 FDD 10 MHz: OP.6 FDD 20 MHz: OP.14 FDD | | |
| | Config 4, 5, 6 | | 5 MHz: OP.10 TDD 10 MHz: OP.2 TDD 20 MHz: OP.8 TDD | | |
| PBCH_RA | | dB | 0 | | |
| PBCH_RB | | | | | |
| PSS_RA | | | | | |
| SSS_RA | | | | | |
| PCFICH_RB | | | | | |
| PHICH_RA | | | | | |
| PHICH_RB | | | | | |
| PDCCH_RA | | | | | |
| PDCCH_RB | | | | | |
| PDSCH_RA | | | | | |
| PDSCH_RB | | | | | |
| OCNG_RA ^{Note3} | | | | | |
| OCNG_RB ^{Note3} | | | | | |
| N _{oc1} ^{Note4} | Bands FDD_A ^{Note 9} , TDD_A | dBm/15kHz | -88 | -108.50 | -119.5 |
| | Bands FDD_B1, FDD_B2 ^{Note 10} | | | | -119 |
| | Bands FDD_C, TDD_C | | | | -118.5 |
| | Bands FDD_D | | | | -118 |
| | Bands FDD_E, FDD_F ^{Note 7} , TDD_E | | | | -117.5 |
| | Bands FDD_G ^{Note 8} Bands FDD_H | | | | -116.5 -116 |
| N _{oc2} ^{Note4a} | Bands FDD_A ^{Note 9} , TDD_A | dBm/15kHz | -82 | -114.5 | -113.5 |
| | Bands FDD_B1, FDD_B2 ^{Note 10} | | | | -113 |
| | Bands FDD_C, TDD_C | | | | -112.5 |
| | Bands FDD_D | | | | -112 |
| | Bands FDD_E, FDD_F ^{Note 7} , TDD_E | | | | -111.5 |

| | | | | | |
|---|---|--------------|----------------------------------|----------------------------------|----------------------------------|
| | Bands FDD_G ^{Note 8} | | | | -110.5 |
| | Bands FDD_H | | | | -110 |
| CRS \hat{E}_s/N_{oc1} | | dB | -1.75 | -4.0 | -4.0 |
| CRS \hat{E}_s/I_{ot} ^{Note 5} | | dB | -1.75 | -4.0 | -4.0 |
| RSRP ^{Note 5} | Bands FDD_A ^{Note 9} , TDD_A | dBm/15kHz | -89.75 | -88.50 | -123.5 |
| | Bands FDD_B1, FDD_B2 ^{Note 10} | | | | -123 |
| | Bands FDD_C, TDD_C | | | | -122.5 |
| | Bands FDD_D | | | | -122 |
| | Bands FDD_E, FDD_F ^{Note 7} , TDD_E | | | | -121.5 |
| | Bands FDD_G ^{Note 8} | | | | -120.5 |
| | Bands FDD_H | | | | -120 |
| RS-SINR ^{Note 5} | Bands FDD_A ^{Note 9} , TDD_A | dB | -1.75 | 20 | -4.0 |
| | Bands FDD_B1, FDD_B2 ^{Note 10} | | | | |
| | Bands FDD_C, TDD_C | | | | |
| | Bands FDD_D | | | | |
| | Bands FDD_E, FDD_F ^{Note 7} , TDD_E | | | | |
| | Bands FDD_G ^{Note 8} | | | | |
| | Bands FDD_H | | | | |
| I _o ^{Note 5} | Bands FDD_A ^{Note 9} , TDD_A | dBm/Ch BW | $-53.79 + 10\log(N_{RB,c} / 50)$ | $-60.56 + 10\log(N_{RB,c} / 50)$ | $-93.48 + 10\log(N_{RB,c} / 50)$ |
| | Bands FDD_B1, FDD_B2 ^{Note 10} | | | | $-92.98 + 10\log(N_{RB,c} / 50)$ |
| | Bands FDD_C, TDD_C | | | | $-92.48 + 10\log(N_{RB,c} / 50)$ |
| | Bands FDD_D | | | | $-91.98 + 10\log(N_{RB,c} / 50)$ |
| | Bands FDD_E, FDD_F ^{Note 7} , TDD_E | | | | $-91.48 + 10\log(N_{RB,c} / 50)$ |
| | Bands FDD_G ^{Note 8} | | | | $-90.48 + 10\log(N_{RB,c} / 50)$ |
| | Bands FDD_H | | | | $-89.98 + 10\log(N_{RB,c} / 50)$ |
| Propagation Condition | | | AWGN | | |
| Antenna Configuration and Correlation Matrix | | | 1x2 | | |
| <p>Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].</p> <p>Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.</p> <p>Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over CRS subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc1} to be fulfilled.</p> <p>Note 4a: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers other than CRS subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc2} to be fulfilled.</p> <p>Note 5: CRS \hat{E}_s/I_{ot}, RSRP, RS-SINR and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 6: E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [15].</p> <p>Note 7: For Band 26, the tests shall be performed with the carrier frequency of assigned E-UTRA channel bandwidth within 865-894 MHz.</p> | | | | | |

Note 8: Except Band 29.
 Note 9: Except Band 32, Band 75 and Band 76.
 Note 10: For Band 74, the tests shall be performed with the carrier frequency of the assigned E-UTRA channel bandwidth within 1475.9-1510.9 MHz.

A.6.7.7.1.3 Test Requirements

The SA inter-RAT E-UTRAN RS-SINR measurement accuracy for cell 2 shall fulfil absolute requirement in clause 10.2.4.

A.7 NR standalone tests with one or more NR cells in FR2

A.7.1 SA: RRC_IDLE state mobility

A.7.1.1 Cell re-selection to NR

A.7.1.1.1 Cell reselection to FR2 intra-frequency NR case

A.7.1.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements specified in clause 4.2.2.3.

A.7.1.1.1.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.7.1.1.1.2-1, A.7.1.1.1.2-2 and A.7.1.1.1.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.7.1.1.1.2-1: Supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations. |

Table A.7.1.1.1.2-2: General test parameters for intra frequency NR cell re-selection test case

| Parameter | | Unit | Test configuration | Value | Comment |
|----------------------------|-----------------|------|--------------------|----------------|---|
| Initial condition | Active cell | | 1, 2 | Cell1 | |
| | Neighbour cells | | 1, 2 | Cell2 | |
| T2 end condition | Active cell | | 1, 2 | Cell2 | |
| | Neighbour cells | | 1, 2 | Cell1 | |
| Final condition | Visited cell | | 1, 2 | Cell1 | |
| RF Channel Number | | | 1, 2 | 1 | |
| Time offset between cells | | | 1, 2 | 3 μ s | Synchronous cells |
| Access Barring Information | | - | 1, 2 | Not Sent | No additional delays in random access procedure. |
| SMTC configuration | | | 1, 2 | SMTC pattern 1 | |
| DRX cycle length | | s | 1, 2 | 1.28 | The value shall be used for all cells in the test. |
| PRACH configuration index | | | 1, 2 | 190 | The detailed configuration is specified in TS 38.211 clause 6.3.3.2 |
| rangeToBestCell | | | 1, 2 | Not configured | |
| T1 | | s | 1, 2 | >7 | During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2 |
| T2 | | s | 1, 2 | 135 | T2 needs to be defined so that cell re-selection reaction time is taken into account. |
| T3 | | s | 1, 2 | 35 | T3 needs to be defined so that cell re-selection reaction time is taken into account. |

Table A.7.1.1.1.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case in AWGN

| Parameter | Unit | Test configuration | Cell 1 | | | Cell 2 | | |
|--|---------------|--------------------|-----------------------------|--------|--------|-----------------------------|--------|--------|
| | | | T1 | T2 | T3 | T1 | T2 | T3 |
| TDD configuration | | 1, 2 | TDDConf.3.1 | | | TDDConf.3.1 | | |
| PDSCH RMC configuration | | 1 | SR.3.1 TDD | | | N/A | | |
| | | 2 | SR.3.1 TDD | | | | | |
| RMSI CORESET RMC configuration | | 1 | CR.3.1 TDD | | | CR.3.1 TDD | | |
| | | 2 | CR.3.1 TDD | | | CR.3.1 TDD | | |
| Dedicated CORESET RMC configuration | | 1 | CCR.3.1 TDD | | | CCR.3.1 TDD | | |
| | | 2 | CCR.3.1 TDD | | | CCR.3.1 TDD | | |
| SSB configuration | | 1 | SSB.3 FR2 | | | SSB.7 FR2 | | |
| | | 2 | SSB.4 FR2 | | | SSB.8 FR2 | | |
| OCNG Pattern | | 1, 2 | OP.4 | | | OP.4 | | |
| Initial DL BWP configuration | | 1, 2 | DLBWP.0.1 | | | DLBWP.0.1 | | |
| Initial UL BWP configuration | | 1, 2 | ULBWP.0.1 | | | ULBWP.0.1 | | |
| RLM-RS | | 1, 2 | SSB | | | SSB | | |
| Qrxlevmin | dBm/SCS | 1 | -140 | | | -140 | | |
| | | 2 | -137 | | | -137 | | |
| Pcompensation | dB | 1, 2 | 0 | | | 0 | | |
| Qhyst _s | dB | 1, 2 | 0 | | | 0 | | |
| Qoffset _{s, n} | dB | 1, 2 | 0 | | | 0 | | |
| Cell_selection_and_reselection_quality_measurement | | 1, 2 | SS-RSRP | | | SS-RSRP | | |
| AoA setup | | 1, 2 | Setup 1 defined in A.3.15.1 | | | Setup 1 defined in A.3.15.1 | | |
| \hat{E}_s / I_{ot} | dB | 1 | 8 | -3 | 1.5 | -infinity | 1.5 | -3 |
| | | 2 | | | | | | |
| N_{oc} ^{Note2} | dBm/SCS | 1 | -93 | | | | | |
| | | 2 | -90 | | | | | |
| N_{oc} ^{Note2} | dBm/15 kHz | 1 | -102 | | | | | |
| | | 2 | | | | | | |
| \hat{E}_s / N_{oc} | dB | 1 | 8 | -3 | 1.5 | -infinity | 1.5 | -3 |
| | | 2 | | | | | | |
| SS-RSRP ^{Note3} | dBm/SCS | 1 | -85 | -96 | -91.5 | -infinity | -91.5 | -96 |
| | | 2 | -82 | -93 | -88.5 | -infinity | -88.5 | -93 |
| Io on SSB symbols of each cell | dBm/95.04 MHz | 1 | -59.37 | -63.40 | -62.47 | -64.01 | -62.47 | -63.40 |
| | | 2 | -57.18 | -62.86 | -61.67 | -64.01 | -61.67 | -62.86 |
| Treselection | s | 1, 2 | 0 | 0 | 0 | 0 | 0 | 0 |
| SintrasearchP | dB | 1, 2 | 50 | | | 50 | | |
| Propagation Condition | | 1, 2 | AWGN | | | | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | | | |

A.7.1.1.1.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than 130 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to an already detected cell shall be less than 27 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{\text{detect, NR_Intra}} + T_{\text{SI-NR}}$, and to an already detected cell can be expressed as: $T_{\text{evaluate, NR_intra}} + T_{\text{SI-NR}}$,

Where:

| | |
|----------------------------------|---|
| $T_{\text{detect, NR_Intra}}$ | See Table 4.2.2.3-1 in clause 4.2.2.3 |
| $T_{\text{evaluate, NR_intra}}$ | See Table 4.2.2.3-1 in clause 4.2.2.3 |
| $T_{\text{SI-NR}}$ | Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case. |

This gives a total of 129.28 s, allow 130 s for the cell re-selection delay to a newly detectable cell and 26.88 s for the cell re-selection delay to an already detected cell in the test case, which we allow 27 s.

A.7.1.1.2 Cell reselection to FR2 inter-frequency NR case

A.7.1.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2.2.4.

A.7.1.1.2.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.7.1.1.2.2-1, A.7.1.1.2.2-2 and A.7.1.1.2.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.7.1.1.2.2-1: Supported test configurations

| Configuration | Description for serving cell | Description for target cell |
|---|---|---|
| 1 | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode | 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations. | | |

Table A.7.1.1.2.2-2: General test parameters for FR2 inter frequency NR cell re-selection test case

| Parameter | | Unit | Test configuration | Value | Comment |
|----------------------------|-----------------|------|--------------------|----------------|--|
| Initial condition | Active cell | | 1, 2 | Cell2 | The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1 |
| T1 end condition | Active cell | | 1, 2 | Cell1 | The UE shall perform reselection to cell 1 during T1 |
| | Neighbour cells | | 1, 2 | Cell2 | |
| T3 end condition | Active cell | | 1, 2 | Cell2 | The UE shall perform reselection to cell 2 with higher priority during T3 |
| RF Channel Number | | | 1, 2 | 1, 2 | |
| Time offset between cells | | | 1, 2 | 3 μ s | Synchronous cells |
| Access Barring Information | | - | 1, 2 | Not Sent | No additional delays in random access procedure. |
| SSB configuration | | | 1 | SSB.1 FR2 | |
| | | | 2 | SSB.2 FR2 | |
| SMTC configuration | | | 1, 2 | SMTC pattern 1 | |
| DRX cycle length | | s | 1, 2 | 1.28 | The value shall be used for all cells in the test. |
| PRACH configuration index | | | 1, 2 | 190 | The detailed configuration is specified in TS 38.211 clause 6.3.3.2 |
| rangeToBestCell | | | 1, 2 | Not configured | |
| T1 | | s | 1, 2 | 35 | T1 needs to be defined so that cell re-selection reaction time is taken into account. |
| T2 | | s | 1, 2 | >7 | During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3. |
| T3 | | s | 1, 2 | 95 | T3 needs to be defined so that cell re-selection reaction time is taken into account. |

Table A.7.1.1.2.2-3: Cell specific test parameters for FR2 inter frequency NR cell re-selection test case in AWGN

| Parameter | Unit | Test configuration | Cell 1 | | | Cell 2 | | |
|--|--|--------------------|-----------------------------|--------|--------|-----------------------------|-----------|--------|
| | | | T1 | T2 | T3 | T1 | T2 | T3 |
| TDD configuration | | 1, 2 | TDDConf.3.1 | | | TDDConf.3.1 | | |
| PDSCH RMC configuration | | 1, 2 | SR.3.1 TDD | | | N/A | | |
| RMSI CORESET parameters | | 1, 2 | CR.3.1 TDD | | | CR.3.1 TDD | | |
| RMSI CORESET RMC configuration | | 1, 2 | CCR.3.1 TDD | | | CCR.3.1 TDD | | |
| OCNG Pattern | | 1, 2 | OP.1 defined in A.3.2.1 | | | OP.1 defined in A.3.2.1 | | |
| Initial DL BWP configuration | | 1, 2 | DLBWP.0.1 | | | DLBWP.0.1 | | |
| Initial UL BWP configuration | | 1, 2 | ULBWP.0.1 | | | ULBWP.0.1 | | |
| RLM-RS | | 1, 2 | SSB | | | SSB | | |
| Qrxlevmin | dBm/SCS | 1 | -140 | | | -140 | | |
| | | 2 | -137 | | | -137 | | |
| Pcompensation | dB | 1, 2 | 0 | | | 0 | | |
| Qhysts | dB | 1, 2 | 0 | | | 0 | | |
| Qoffsets, n | dB | 1, 2 | 0 | | | 0 | | |
| Cell_selection_and_reselection_quality_measurement | | 1, 2 | SS-RSRP | | | SS-RSRP | | |
| AoA setup | | 1, 2 | Setup 1 defined in A.3.15.1 | | | Setup 1 defined in A.3.15.1 | | |
| \hat{E}_s / I_{ot} | dB | 1 | 8 | 8 | 8 | -3 | -infinity | 8 |
| | | 2 | | | | | | |
| N_{oc} Note2 | dBm/SCS | 1 | -93 | | | -93 | | |
| | | 2 | -90 | | | -90 | | |
| N_{oc} Note2 | dBm/15 kHz | 1 | -102 | | | -102 | | |
| | | 2 | | | | | | |
| \hat{E}_s / N_{oc} | dB | 1 | 8 | 8 | 8 | -3 | -infinity | 8 |
| | | 2 | | | | | | |
| SS-RSRP Note3 | dBm/SCS | 1 | -85 | -85 | -85 | -96 | -infinity | -85 |
| | | 2 | -82 | -82 | -82 | -93 | -infinity | -82 |
| Io | dBm/95.04 MHz | 1 | -55.37 | -55.37 | -55.37 | -62.25 | -infinity | -55.37 |
| | | 2 | -52.37 | -52.37 | -52.37 | -59.25 | -infinity | -52.37 |
| Treselection | s | 1, 2 | 0 | 0 | 0 | 0 | 0 | 0 |
| SnonintrasearchP | dB | 1, 2 | 50 | | | Not sent | | |
| Thresh _{x, high} | dB | 1, 2 | 48 | | | 48 | | |
| Thresh _{serv, low} | dB | 1, 2 | 44 | | | 44 | | |
| Thresh _{x, low} | dB | 1, 2 | 50 | | | 50 | | |
| Propagation Condition | | 1, 2 | AWGN | | | AWGN | | |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | | | |
| Note 3: | SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | | | |

A.7.1.1.2.3 Test Requirements

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps again on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 87 s.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to a lower priority cell shall be less than 27 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{\text{higher_priority_search}} + T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$, and to a lower priority cell can be expressed as: $T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$.

Where:

| | |
|---------------------------------------|---|
| $T_{\text{higher_priority_search}}$ | See clause 4.2.2.7 |
| $T_{\text{evaluate, NR_inter}}$ | See Table 4.2.2.4-1 in clause 4.2.2.4 |
| $T_{\text{SI-NR}}$ | Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case. |

This gives a total of 86.88 s, allow 87 s for the cell re-selection delay to a higher priority cell and 26.88 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 27 s.

A.7.2 SA: RRC_INACTIVE state mobility

A.7.3 RRC_CONNECTED state mobility

A.7.3.1 Handover

A.7.3.1.1 Inter-frequency handover from FR1 to FR2; unknown target cell

A.7.3.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR2 inter frequency handover requirements specified in clause 6.1.1.5.

A.7.3.1.1.2 Test Parameters

Supported test configurations are shown in table A.7.3.1.2.2-1. Both handover delay and interruption length are tested by using the parameters in table A.7.3.1.1.2-2, and A.7.3.1.1.2-3.

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.7.3.1.1.2-1: Inter-frequency handover from FR1 to FR2 test configurations

| Config | Description |
|--|--|
| 1 | Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 3 | Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations | |

Table A.7.3.1.1.2-2: General test parameters Inter-frequency handover from FR1 to FR2

| Parameter | Unit | Value | Comment |
|----------------------------|-------------------|-----------|--|
| Initial conditions | Active cell | Cell 1 | |
| | Neighbouring cell | Cell 2 | |
| Final condition | Active cell | Cell 2 | |
| A4-Offset | dBm | [-120] | |
| Hysteresis | dB | 0 | |
| Time To Trigger | s | 0 | |
| Filter coefficient | | 0 | L3 filtering is not used |
| Access Barring Information | - | Not Sent | No additional delays in random access procedure. |
| Time offset between cells | | 3 μ s | Synchronous cells |
| T1 | s | 5 | |
| T2 | s | ≤ 10 | |

Table A.7.3.1.1.2-3: Cell specific test parameters for NR FR1-FR2 Inter frequency handover test case

| Parameter | Unit | Cell 1 | | Cell 2 | |
|---|------|--------|----|--------------------------------|----|
| | | T1 | T2 | T1 | T2 |
| Assumption for UE beams ^{Note 6} | | N/A | | Rough | |
| AoA setup | | NA | | Setup TBD as defined in A.3.15 | |
| NR RF Channel Number | | 1 | | 2 | |

| | | | | |
|-------------------------------------|------------------|-----|-----------------------------|-----------------------------|
| Duplex mode | Config 1 | | FDD | TDD |
| | Config 2,3 | | TDD | TDD |
| TDD configuration | Config 1 | | Not Applicable | TDDConf.3.1 |
| | Config 2 | | TDDConf.1.1 | TDDConf.3.1 |
| | Config 3 | | TDDConf.2.1 | TDDConf.3.1 |
| BW _{channel} | Config 1 | MHz | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 |
| | Config 2 | | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 |
| | Config 3 | | 40: N _{RB,c} = 106 | 100: N _{RB,c} = 66 |
| BWP BW | Config 1 | MHz | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 |
| | Config 2 | | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 |
| | Config 3 | | 40: N _{RB,c} = 106 | 100: N _{RB,c} = 66 |
| DRx Cycle | | ms | Not Applicable | |
| PDSCH Reference measurement channel | Config 1 | | SR.1.1 FDD | SR3.1 TDD |
| | Config 2 | | SR.1.1 TDD | SR3.1 TDD |
| | Config 3 | | SR2.1 TDD | SR3.1 TDD |
| CORESET Reference Channel | Config 1 | | CR.1.1 FDD | CR3.1 TDD |
| | Config 2 | | CR.1.1 TDD | CR3.1 TDD |
| | Config 3 | | CR2.1 TDD | CR3.1 TDD |
| OCNG Patterns | | | OCNG pattern 1 | |
| SSB configuration | Config 1,2 | | SSB.1 FR1 | SSB.1 FR2 |
| | Config 3 | | SSB.2 FR1 | SSB.1 FR2 |
| SSB configuration | Config 1,2 | | SSB.1 FR1 | SSB.1 FR2 |
| | Config 3 | | SSB.2 FR1 | SSB.1 FR2 |
| SMTC configuration | Config 1,2 | | SMTC.1 | SMTC.1 |
| | Config 3 | | SMTC.2 | SMTC.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1,2 | kHz | 15 kHz | 120 kHz |
| | Config 3 | | 30 kHz | 120 kHz |
| PUCCH/PUSCH subcarrier spacing | Config 1,2 | kHz | 15 kHz | 120 kHz |
| | Config 3 | | 30 kHz | 120 kHz |
| PRACH configuration | | | FR1 PRACH configuration 1 | FR2 PRACH configuration 1 |
| TRS configuration | Config 1 | | TRS.1.1 FDD | TRS.2.1 TDD |
| | Config 2 | | TRS.1.1 TDD | TRS.2.1 TDD |
| | Config 3 | | TRS.1.2 TDD | TRS.2.1 TDD |
| TCI configuration | | | N/A | CSI-RS.Config.0 |
| BWP configuraiton | Initial DL BWP | | DLBWP.0.1 | DLBWP.0.1 |
| | Dedicated DL BWP | | DLBWP.1.1 | DLBWP.1.1 |
| | Initial UL BWP | | ULBWP.0.1 | ULBWP.0.1 |
| | Dedicated UL BWP | | ULBWP.1.1 | ULBWP.1.1 |
| EPRE ratio of PSS to SSS | | dB | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | |

| | | | | | | |
|---|------------|------------|---------------------------------------|-----------|--------|------|
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | |
| N_{oc} ^{Note2} | | dBm/15kHz | | | -104.7 | |
| N_{oc} ^{Note2} | Config 1,2 | dBm/SCS | | | -95.7 | |
| | Config 3 | | | | -95.7 | |
| \hat{E}_s / I_{ot} | | dB | NA Link only, see clause A.3.7A | -Infinity | 10 | |
| \hat{E}_s / N_{oc} | | dB | | -Infinity | 10 | |
| I_{o} ^{Note3} | Config 1,2 | dBm/ BW | | -66.7 | -55.4 | |
| | Config 3 | dBm/ BW | | -66.7 | -55.4 | |
| Propagation condition | | - | | | | AWGN |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone</p> <p>Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation</p> | | | | | | |

A.7.3.1.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than [562] ms from the beginning of time period T2. The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = [10] ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = [552] ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.5.2.

This gives a total of [562] ms.

A.7.3.1.2 Intra-frequency handover from FR2 to FR2; unknown target cell

A.7.3.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR2-NR FR2 intra frequency handover requirements specified in clause 6.1.1.4.

A.7.3.1.2.2 Test Parameters

Supported test configurations are shown in table A.7.3.1.2.2-1. Both handover delay and interruption length are tested by using the parameters in table A.7.3.1.2.2-2, and A.7.3.1.2.2-3.

The test scenario comprises of carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.7.3.1.2.2-1: Intra-frequency handover from FR2 to FR2 test configurations

| Config | Description |
|--------|--|
| 1 | Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |

Table A.7.3.1.2.2-2: General test parameters Intra-frequency handover from FR2 to FR2

| Parameter | Unit | Value | Comment |
|----------------------------|-------------------|-----------|--|
| Initial conditions | Active cell | Cell 1 | |
| | Neighbouring cell | Cell 2 | |
| Final condition | Active cell | Cell 2 | |
| A4-Offset | dBm | -120 | |
| Hysteresis | dB | 0 | |
| Time To Trigger | s | 0 | |
| Filter coefficient | | 0 | L3 filtering is not used |
| Access Barring Information | - | Not Sent | No additional delays in random access procedure. |
| Time offset between cells | | 3 μ s | Synchronous cells |
| T1 | s | 5 | |
| T2 | s | ≤ 10 | |

Table A.7.3.1.2.2-3: Cell specific test parameters for NR FR2-FR2 Intra frequency handover test case

| Parameter | Unit | Cell 1 | | Cell 2 | |
|---|------------------|--------------------------------|----|--------|----|
| | | T1 | T2 | T1 | T2 |
| Assumption for UE beams ^{Note 6} | | Rough | | Rough | |
| AoA setup | | Setup TBD as defined in A.3.15 | | | |
| NR RF Channel Number | | 1 | | 1 | |
| Duplex mode | | TDD | | | |
| TDD configuration | | TDDConf.3.1 | | | |
| BW _{channel} | MHz | 100: N _{RB,c} = 66 | | | |
| BWP BW | MHz | 100: N _{RB,c} = 66 | | | |
| DRx Cycle | ms | Not Applicable | | | |
| PDSCH Reference measurement channel | | SR3.1 TDD | | | |
| CORESET Reference Channel | | CR3.1 TDD | | | |
| OCNG Patterns | | OCNG pattern 1 | | | |
| SMTc Configuration | | SMTc pattern 1 | | | |
| SSB Configuration | | SSB.1 FR2 | | | |
| PDSCH/PDCCH subcarrier spacing | kHz | 120 kHz | | | |
| PUCCH/PUSCH subcarrier spacing | kHz | 120 kHz | | | |
| PRACH configuration | | FR2 PRACH configuration 1 | | | |
| TRS configuration | | TRS.2.1 TDD | | | |
| TCl configuration | | CSI-RS.Config.0 | | | |
| BWP configuration | Initial DL BWP | DLBWP.0.1 | | | |
| | Dedicated DL BWP | DLBWP.1.1 | | | |
| | Initial UL BWP | ULBWP.0.1 | | | |
| | Dedicated UL BWP | ULBWP.1.1 | | | |
| EPRE ratio of PSS to SSS | dB | 0 | | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | | |

| | | | | | | |
|--|------------|-----------|-------|--------|-----------|--------|
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | |
| N_{oc} ^{Note2} | | dBm/15kHz | | -104.7 | | -104.7 |
| N_{oc} ^{Note2} | Config 1,2 | dBm/SCS | | -95.7 | | -95.7 |
| | Config 3 | | | -95.7 | | -95.7 |
| \hat{E}_s / I_{ot} | | dB | 6 | -1.8 | -Infinity | 0 |
| \hat{E}_s / N_{oc} | | dB | 6 | 6 | -Infinity | 7 |
| I_o ^{Note3} | Config 1,2 | dBm/BW | -59.7 | -56.7 | -59.7 | -56.7 |
| | Config 3 | dBm/BW | -59.7 | -56.7 | -59.7 | -56.7 |
| Propagation condition | | - | AWGN | | | |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | |
| Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | | |
| Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | | |
| Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone | | | | | | |
| Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone | | | | | | |
| Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation | | | | | | |

A.7.3.1.2.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 222 ms from the beginning of time period T2. The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 212 ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.4.2.

This gives a total of 222 ms.

A.7.3.1.3 Inter-frequency handover from FR2 to FR2; unknown target cell

A.7.3.1.3.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR2-NR FR2 inter frequency handover requirements specified in clause 6.1.1.4.

A.7.3.1.3.2 Test Parameters

Supported test configurations are shown in table A.7.3.1.3.2-1. Both handover delay and interruption length are tested by using the parameters in table A.7.3.1.3.2-2, and A.7.3.1.3.2-3.

The test scenario comprises of carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.7.3.1.3.2-1: Inter-frequency handover from FR2 to FR2 test configurations

| Config | Description |
|--------|--|
| 1 | Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |

Table A.7.3.1.3.2-2: General test parameters Inter-frequency handover from FR2 to FR2

| Parameter | Unit | Value | Comment |
|----------------------------|-------------------|-----------|--|
| Initial conditions | Active cell | Cell 1 | |
| | Neighbouring cell | Cell 2 | |
| Final condition | Active cell | Cell 2 | |
| A4-Offset | dB | [-120] | |
| Hysteresis | dB | 0 | |
| Time To Trigger | s | 0 | |
| Filter coefficient | | 0 | L3 filtering is not used |
| Access Barring Information | - | Not Sent | No additional delays in random access procedure. |
| Time offset between cells | | 3 μ s | Synchronous cells |
| T1 | s | 5 | |
| T2 | s | ≤ 10 | |

Table A.7.3.1.3.2-3: Cell specific test parameters for NR FR2-FR2 Inter frequency handover test case

| Parameter | Unit | Cell 1 | | Cell 2 | |
|---|------------------|--------------------------------|----|--------|----|
| | | T1 | T2 | T1 | T2 |
| Assumption for UE beams ^{Note 6} | | Rough | | Rough | |
| AoA setup | | Setup TBD as defined in A.3.15 | | | |
| NR RF Channel Number | | 1 | | 2 | |
| Duplex mode | | TDD | | | |
| TDD configuration | | TDDConf.3.1 | | | |
| BW _{channel} | MHz | 100: N _{RB,c} = 66 | | | |
| BWP BW | MHz | 100: N _{RB,c} = 66 | | | |
| DRx Cycle | ms | Not Applicable | | | |
| PDSCH Reference measurement channel | | SR3.1 TDD | | | |
| CORESET Reference Channel | | CR3.1 TDD | | | |
| OCNG Patterns | | OCNG pattern 1 | | | |
| SMTTC Configuration | | SMTTC pattern 1 | | | |
| SSB Configuration | | SSB.1 FR2 | | | |
| PDSCH/PDCCH subcarrier spacing | kHz | 120 kHz | | | |
| PUCCH/PUSCH subcarrier spacing | kHz | 120 kHz | | | |
| PRACH configuration | | FR2 PRACH configuration 1 | | | |
| TRS configuration | | TRS.2.1 TDD | | | |
| TCI configuration | | CSI-RS.Config.0 | | | |
| BWP configuration | Initial DL BWP | DLBWP.0.1 | | | |
| | Dedicated DL BWP | DLBWP.1.1 | | | |
| | Initial UL BWP | ULBWP.0.1 | | | |
| | Dedicated UL BWP | ULBWP.1.1 | | | |
| EPRE ratio of PSS to SSS | dB | 0 | | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | | |

| | | | | | | |
|---|------------|----------------|--------|-------|-----------|-------|
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | |
| N_{oc} ^{Note2} | | dBm/15kHz z | -104.7 | | -104.7 | |
| N_{oc} ^{Note2} | Config 1,2 | dBm/SCS | -95.7 | | -95.7 | |
| | Config 3 | | -95.7 | | -95.7 | |
| \hat{E}_s / I_{ot} | | dB | 5 | 5 | -Infinity | 5 |
| \hat{E}_s / N_{oc} | | dB | 5 | 5 | -Infinity | 5 |
| I_o ^{Note3} | Config 1,2 | dBm/ BW | -60.5 | -60.5 | -66.7 | -60.5 |
| | Config 3 | dBm/ BW | -60.5 | -60.5 | -66.7 | -60.5 |
| Propagation condition | | - | AWGN | | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone</p> <p>Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation</p> | | | | | | |

A.7.3.1.3.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 542 ms from the beginning of time period T2. The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 532 ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.4.2.

This gives a total of 542 ms.

A.7.3.2 RRC Connection Mobility Control

A.7.3.2.1 SA: RRC Re-establishment

A.7.3.2.1.1 Intra-frequency RRC Re-establishment in FR2

A.7.3.2.1.1.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR2 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1.

The test parameters are given in table A.7.3.2.1.1.1-1, table A.7.3.2.1.1.1-2 and table A.7.3.2.1.1.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period

T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure.

Table A.7.3.2.1.1.1-1: Supported test configurations

| Config | Description |
|--------|--|
| 1 | NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |

Table A.7.3.2.1.1.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR2

| Parameter | | Unit | Test configuration | Value | Comment |
|----------------------------|-----------------|------|--------------------|---------------------------|---|
| Initial condition | Active cell | | 1 | Cell1 | |
| | Neighbour cells | | 1 | Cell2 | |
| Final condition | Active cell | | 1 | Cell2 | |
| RF Channel Number | | | 1 | 1 | |
| Time offset between cells | | | 1 | 3 μ s | Synchronous cells |
| N310 | | - | 1 | 1 | Maximum consecutive out-of-sync indications from lower layers |
| N311 | | - | 1 | 1 | Minimum consecutive in-sync indications from lower layers |
| T310 | | ms | 1 | 0 | Radio link failure timer; T310 is disabled |
| T311 | | ms | 1 | 5000 | RRC re-establishment timer |
| Access Barring Information | | - | 1 | Not Sent | No additional delays in random access procedure. |
| SSB configuration | | | 1 | SSB.1 FR2 | |
| SMTC configuration | | | 1 | SMTC pattern 1 | |
| DRX cycle length | | s | 1 | OFF | |
| PRACH configuration | | | 1 | FR2 PRACH configuration 1 | Table A.3.8.3.1-1 |
| T1 | | s | 1 | 5 | |
| T2 | | ms | 1 | 1600 | Time for the UE to detect RLF |
| T3 | | s | 1 | 3 | |

Table A.7.3.2.1.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR2

| Parameter | Unit | Test configuration | Cell 1 | | | Cell 2 | | |
|---|--|--------------------|-----------------------------|-----------|-----------|-----------------------------|--------|--------|
| | | | T1 | T2 | T3 | T1 | T2 | T3 |
| Assumption for UE beams ^{Note 4} | | | Rough | | | Rough | | |
| TDD configuration | | 1 | TDDConf.3.1 | | | TDDConf.3.1 | | |
| PDSCH RMC configuration | | 1 | SR.3.1 TDD | | | N/A | | |
| RMSI CORESET RMC configuration | | 1 | CR.3.1 TDD | | | CR.3.1 TDD | | |
| Dedicated CORESET RMC configuration | | 1 | CCR.3.1 TDD | | | CCR.3.1 TDD | | |
| TRS configuration | | 1 | TRS.2.1 TDD | | | N/A | | |
| PDSCH/PDCCH TCI state | | 1 | TCI.State.2 | | | N/A | | |
| OCNG Pattern | | 1 | OP.1 defined in A.3.2.1 | | | OP.1 defined in A.3.2.1 | | |
| Initial DL BWP configuration | | 1 | DLBWP.0.1 | | | DLBWP.0.1 | | |
| Initial UL BWP configuration | | 1 | ULBWP.0.1 | | | ULBWP.0.1 | | |
| RLM-RS | | 1 | SSB | | | SSB | | |
| AoA setup | | 1 | Setup 1 defined in A.3.15.1 | | | Setup 1 defined in A.3.15.1 | | |
| \hat{E}_s / I_{α} | dB | 1 | -3.07 | -infinity | -infinity | -5.07 | 2 | 2 |
| N_{oc} ^{Note2} | dBm/15 kHz | 1 | -98 | | | | | |
| N_{oc} ^{Note2} | dBm/SCS | 1 | -89 | | | | | |
| \hat{E}_s / N_{oc} | dB | 1 | 4 | -infinity | -infinity | 2 | 2 | 2 |
| SS-RSRP ^{Note3} | dBm/SCS | 1 | -85 | -infinity | -infinity | -87 | -87 | -87 |
| I_o | dBm/95.04 MHz | 1 | -52.94 | -55.89 | -55.89 | -52.94 | -55.89 | -55.89 |
| Propagation Condition | | 1 | AWGN | | | | | |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | | | |
| Note 3: | SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | | | |
| Note 4: | Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation | | | | | | | |

A.7.3.2.1.1.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell shall be less than 3 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

$$N_{freq} = 1$$

$$T_{identify_intra_NR} = 1600 \text{ ms}$$

$T_{SI} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target intra-frequency NR cell.

$T_{PRACH} = 15 \text{ ms}$; it is the additional delay caused by the random access procedure.

This gives a total of 2945 ms, allow 3 s in the test case.

A.7.3.2.1.2 Inter-frequency RRC Re-establishment in FR2

A.7.3.2.1.2.1 Test Purpose and Environment

The purpose is to verify that the NR inter-frequency RRC re-establishment delay in FR2 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1.

The test parameters are given in table A.7.3.2.1.2.1-1, table A.7.3.2.1.2.1-2 and table A.7.3.2.1.2.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1.

Table A.7.3.2.1.2.1-1: Supported test configurations

| Config | Description |
|--------|--|
| 1 | NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |

Table A.7.3.2.1.2.1-2: General test parameters for NR inter-frequency RRC Re-establishment test case in FR2

| Parameter | | Unit | Test configuration | Value | Comment |
|----------------------------|-----------------|------|--------------------|---------------------------|---|
| Initial condition | Active cell | | 1 | Cell1 | |
| | Neighbour cells | | 1 | Cell2 | |
| Final condition | Active cell | | 1 | Cell2 | |
| RF Channel Number | | | 1 | 1, 2 | |
| Time offset between cells | | | 1 | 3 μ s | Synchronous cells |
| N310 | | - | 1 | 1 | Maximum consecutive out-of-sync indications from lower layers |
| N311 | | - | 1 | 1 | Minimum consecutive in-sync indications from lower layers |
| T310 | | ms | 1 | 0 | Radio link failure timer; T310 is disabled |
| T311 | | ms | 1 | 5000 | RRC re-establishment timer |
| Access Barring Information | | - | 1 | Not Sent | No additional delays in random access procedure. |
| SSB configuration | | | 1 | SSB.1 FR2 | |
| | | | 1 | SMTC pattern 1 | |
| DRX cycle length | | s | 1 | OFF | |
| PRACH configuration | | | 1 | FR2 PRACH configuration 1 | Table A.3.8.3.1-1 |
| T1 | | s | 1 | 5 | |
| T2 | | ms | 1 | 1600 | Time for the UE to detect RLF |
| T3 | | s | 1 | 6 | |

Table A.7.3.2.1.2.1-3: Cell specific test parameters for NR inter-frequency RRC Re-establishment test case in FR2

| Parameter | Unit | Test configuration | Cell 1 | | | Cell 2 | | |
|---|--|--------------------|---------------------------------------|-----------|-----------|-------------------------|-----------|--------|
| | | | T1 | T2 | T3 | T1 | T2 | T3 |
| Assumption for UE beams ^{Note 4} | | | Rough | | | Rough | | |
| AoA setup | | 1 | Setup 3 as specified in clause A.3.15 | | | | | |
| | | | AoA1 | | | AoA2 | | |
| TDD configuration | | 1 | TDDConf.3.1 | | | TDDConf.3.1 | | |
| PDSCH RMC configuration | | 1 | SR.3.1 TDD | | | N/A | | |
| RMSI CORESET RMC configuration | | 1 | CR.3.1 TDD | | | CR.3.1 TDD | | |
| Dedicated CORESET RMC configuration | | 1 | CCR.3.1 TDD | | | CCR.3.1 TDD | | |
| TRS configuration | | 1 | TRS.2.1 TDD | | | N/A | | |
| PDSCH/PDCCH TCI state | | 1 | TCI.State.2 | | | N/A | | |
| OCNG Pattern | | 1 | OP.1 defined in A.3.2.1 | | | OP.1 defined in A.3.2.1 | | |
| Initial DL BWP configuration | | 1 | DLBWP.0.1 | | | DLBWP.0.1 | | |
| Initial UL BWP configuration | | 1 | ULBWP.0.1 | | | ULBWP.0.1 | | |
| RLM-RS | | 1 | SSB | | | SSB | | |
| \hat{E}_s / I_{ot} | dB | 1 | 5 | -infinity | -infinity | -infinity | -infinity | 8 |
| N_{oc} ^{Note2} | dBm/15 kHz | 1 | -98 | | | | | |
| N_{oc} ^{Note2} | dBm/SCS | 1 | -89 | | | | | |
| \hat{E}_s / N_{oc} | dB | 1 | 5 | -infinity | -infinity | -infinity | -infinity | 8 |
| SS-RSRP ^{Note3} | dBm/SCS | 1 | -84 | -infinity | -infinity | -infinity | -infinity | -81 |
| I_o | dBm/95.04 MHz | 1 | -53.82 | -infinity | -infinity | -infinity | -infinity | -51.37 |
| Propagation Condition | | 1 | AWGN | | | | | |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | | | |
| Note 3: | SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | | | |
| Note 4: | Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation | | | | | | | |

A.7.3.2.1.2.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less than 6 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

$$N_{freq} = 2$$

$$T_{identify_intra_NR} = 1600 \text{ ms}$$

$$T_{identify_inter_NR} = 2080 \text{ ms}$$

$T_{SI} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target inter-frequency NR cell.

$T_{PRACH} = 15 \text{ ms}$; it is the additional delay caused by the random access procedure.

This gives a total of 5025 ms, allow 6 s in the test case.

A.7.3.2.1.3 Intra-frequency RRC Re-establishment in FR2 without serving cell timing

A.7.3.2.1.3.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR2 without serving cell timing is within the specified limits. These tests will verify the requirements in clause 6.2.1.

The test parameters are given in table A.7.3.2.1.3.1-1, table A.7.3.2.1.3.1-2 and table A.7.3.2.1.3.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.7.3.2.1.3.1-1: Supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |

Table A.7.3.2.1.3.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR2

| Parameter | | Unit | Test configuration | Value | Comment |
|----------------------------|-----------------|------|--------------------|---------------------------|--|
| Initial condition | Active cell | | 1 | Cell1 | |
| | Neighbour cells | | 1 | Cell2 | |
| Final condition | Active cell | | 1 | Cell2 | |
| RF Channel Number | | | 1 | 1 | |
| Time offset between cells | | | 1 | 3 μ s | Synchronous cells |
| N310 | | - | 1 | 1 | Maximum consecutive out-of-sync indications from lower layers |
| N311 | | - | 1 | 1 | Minimum consecutive in-sync indications from lower layers |
| T310 | | ms | 1 | 6000 | Radio link failure timer configured by <i>RLF-TimersAndConstants</i> |
| T311 | | ms | 1 | 5000 | RRC re-establishment timer |
| Access Barring Information | | - | 1 | Not Sent | No additional delays in random access procedure. |
| SSB configuration | | | 1 | SSB.1 FR2 | |
| SMTC configuration | | | 1 | SMTC pattern 1 | |
| DRX cycle length | | s | 1 | OFF | |
| PRACH configuration | | | 1 | FR2 PRACH configuration 1 | Table A.3.8.3.1-1 |
| T1 | | s | 1 | 5 | |
| T2 | | s | 1 | 6 | Time for the UE to detect RLF |
| T3 | | s | 1 | 5 | |

Table A.7.3.2.1.3.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR2

| Parameter | Unit | Test configuration | Cell 1 | | | Cell 2 | | |
|--|---------------|--------------------|-----------------------------|-----------|-----------|-----------------------------|-----------|--------|
| | | | T1 | T2 | T3 | T1 | T2 | T3 |
| Assumption for UE beams ^{Note 4} | | | Rough | | | Rough | | |
| TDD configuration | | 1 | TDDConf.3.1 | | | TDDConf.3.1 | | |
| | | 1 | SR.3.1 TDD | | | N/A | | |
| RMSI CORESET RMC configuration | | 1 | CR.3.1 FDD | | | CR.3.1 FDD | | |
| Dedicated CORESET RMC configuration | | 1 | CCR.3.1 FDD | | | CCR.3.1 FDD | | |
| TRS configuration | | 1 | TRS.2.1 TDD | | | N/A | | |
| TCI state | | 1 | CSI-RS.Config.0 | | | N/A | | |
| OCNG Pattern | | 1 | OP.1 defined in A.3.2.1 | | | OP.1 defined in A.3.2.1 | | |
| Initial DL BWP configuration | | 1 | DLBWP.0.1 | | | DLBWP.0.1 | | |
| Initial UL BWP configuration | | 1 | ULBWP.0.1 | | | ULBWP.0.1 | | |
| RLM-RS | | 1 | SSB | | | SSB | | |
| AoA setup | | 1 | Setup 1 defined in A.3.15.1 | | | Setup 1 defined in A.3.15.1 | | |
| \hat{E}_s / I_{ot} | dB | 1 | 5 | -infinity | -infinity | -infinity | -infinity | 5 |
| N_{oc} ^{Note2} | dBm/SCS | 1 | -98 | | | | | |
| N_{oc} ^{Note2} | dBm/15 kHz | 1 | -89 | | | | | |
| \hat{E}_s / N_{oc} | dB | 1 | 5 | -infinity | -infinity | -infinity | -infinity | 5 |
| SS-RSRP ^{Note3} | dBm/SCS | 1 | -93 | -infinity | -infinity | -infinity | -infinity | -93 |
| l_o | dBm/95.04 MHz | 1 | -62.82 | -infinity | -infinity | -infinity | -infinity | -62.82 |
| Propagation Condition | | 1 | AWGN | | | | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation</p> | | | | | | | | |

A.7.3.2.1.3.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell without serving cell timing shall be less than 5 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

$$N_{freq} = 1$$

$$T_{identify_intra_NR} = 3520 \text{ ms}$$

$T_{SI} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 [2] for the target intra-frequency NR cell.

$T_{PRACH} = 15 \text{ ms}$; it is the additional delay caused by the random access procedure.

This gives a total of 4865 ms, allow 5 s in the test case.

A.7.3.2.2 Random Access

A.7.3.2.2.1 Contention based random access test in FR2 for NR Standalone

A.7.3.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.2 and Clause 7.1.2 in an AWGN model.

For this test one cell is used, with the configuration of Cell 1 configured as PCell or SCell in FR2. Supported test parameters are shown in Table A.7.3.2.2.1.1-1. UE capable of SA with PCell or SCell in FR2 needs to be tested by using the parameters in Table A.7.3.2.2.1.1-2 and Table A.7.3.2.2.1.1-3.

Table A.7.3.2.2.1.1-1: Supported test configurations for contention based random access test in FR2 for NR Standalone

| Config | Description |
|--------|---|
| 1 | NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |

Table A.7.3.2.2.1-2: General test parameters for contention based random access test in FR2 for NR Standalone

| Parameter | | Unit | Test-1 | Comments |
|---|------------|------|----------------------|---|
| SSB Configuration | Config 1,2 | | SSB pattern 1 in FR2 | As defined in A.3.10, except for for number of SSBs per SS-burst and SS/PBCH block index as below |
| Number of SSBs per SS-burst | | | 2 | Different from the definition in A.3.10 |
| SS/PBCH block index | | | 0,1 | Different from the definition in A.3.10 |
| Duplex Mode for Cell 2 | Config 1,2 | | TDD | |
| TDD Configuration | Config 1,2 | | TDDConf.3.1 | |
| OCNG Pattern ^{Note 1} | | | OCNG pattern 1 | As defined in A.3.2.1. |
| PDSCH parameters _{Note 2} | Config 1,2 | | SR3.X TDD | As defined in A.3.1.1. |
| NR RF Channel Number | | | 1 | |
| EPRE ratio of PSS to SSS | | dB | 0 | |
| EPRE ratio of PBCH_DMRS to SSS | | dB | | |
| EPRE ratio of PBCH to PBCH_DMRS | | dB | | |
| EPRE ratio of PDCCH_DMRS to SSS | | dB | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | dB | | |
| EPRE ratio of PDSCH_DMRS to SSS | | dB | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | dB | | |
| <p>Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.</p> <p>Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.</p> | | | | |

Table A.7.3.2.2.1-3: OTA-related test parameters for contention based random access test in FR2 for NR Standalone

| Parameter | | Unit | Test-1 | Comments |
|--|--------|------|--|--|
| AoA setup | | | Setup 2b | As defined in A.3.15.2.2. |
| Assumption for UE beams ^{Note 3} | | | Rough | |
| SSB with index 0 | SSB_RP | dB | [10] dB larger than SSB_RP for SSB index 1 | |
| SSB with index 1 | SSB_RP | dB | Minimum SSB_RP value is dependent on band and power class as specified for spherical coverage AoA in Table B.2.2-2 | |
| Configured UE transmitted power ($P_{\text{CMAX}, f, c}$) | | dBm | maximum value configurable for certain power class | As defined in clause 6.2.4 in TS 38.101-2. |
| PRACH Configuration | | | FR2 PRACH configuration 1 | As defined in A.3.8.3. |
| <i>preambleReceivedTargetPower</i> | | dBm | -60 | |
| Propagation Condition | | - | AWGN | |
| <p>Note 1: No artificial noise is applied in this test.</p> <p>Note 2: void.</p> <p>Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation</p> | | | | |

A.7.3.2.2.1.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.7.3.2.2.1.2.1 Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2.2.2.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *rsrp-ThresholdSSB*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -60 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.1.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.1.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -60 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.1.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.1.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -60 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.1.2.4 Receiving an UL grant for msg3 retransmission

To test the UE behavior specified in clause 6.2.2.2.1.4 the System Simulator shall provide an UL grant for msg3 retransmission following a successful Random Access Response.

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

A.7.3.2.2.1.2.5 Reception of an Incorrect Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element *not* matching the CCCH SDU transmitted in msg3 uplink message.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

A.7.3.2.2.1.2.6 Reception of a Correct Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element matching the CCCH SDU transmitted in the msg3 uplink message.

The UE shall send ACK if the Contention Resolution is successful.

A.7.3.2.2.1.2.7 Contention Resolution Timer expiry

To test the UE behavior specified in Clause 6.2.2.2.1.6 the System Simulator shall *not* send a response to a msg3.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

A.7.3.2.2.2 Non-contention based random access test in FR2 for NR Standalone

A.7.3.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.2 and Clause 7.1.2 in an AWGN model.

For this test one cell is used, with the configuration of Cell 1 configured as PCell or SCell in FR2. Supported test parameters are shown in Table A.7.3.2.2.2.1-1. UE capable of SA with PCell or SCell in FR2 needs to be tested by using the parameters in Table A.7.3.2.2.2.1-2 and Table A.7.3.2.2.2.1-3 for SSB-based non-contention based random access test (Test 1) and CSI-RS-based non-contention based random access test (Test 2). Test 2 is only applicable to UE which supports csi-RSRP-AndRSRQ-MeasWithSSB or csi-RSRP-AndRSRQ-MeasWithoutSSB.

Table A.7.3.2.2.2.1-1: Supported test configurations for non-contention based random access test in FR2 for NR Standalone

| Config | Description |
|--------|---|
| 1 | NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |

Table A.7.3.2.2.1-2: General test parameters for non-contention based random access test in FR2 for NR Standalone

| Parameter | | Unit | Test-1 | Test-2 | Comments |
|---|------------|------|----------------------|----------------------|--|
| SSB Configuration | Config 1,2 | | SSB pattern 1 in FR2 | SSB pattern 1 in FR2 | As defined in A.3.10, except of Number of SSBs per SS-burst and SS/PBCH block index as below |
| Number of SSBs per SS-burst | | | 2 | 2 | Different from the definition in A.3.10 |
| SS/PBCH block index | | | 0,1 | 0,1 | Different from the definition in A.3.10 |
| CSI-RS Configuration | Config 1,2 | | N/A | CSI-RS.3.1 TDD | As defined in A.3.1.4 |
| Duplex Mode for Cell 2 | Config 1,2 | | TDD | TDD | |
| TDD Configuration | Config 1,2 | | TDDConf.3.1 | TDDConf.3.1 | |
| OCNG Pattern ^{Note 1} | | | OCNG pattern 1 | OCNG pattern 1 | As defined in A.3.2.1. |
| PDSCH parameters ^{Note 2} | Config 1,2 | | SR3.X TDD | SR3.X TDD | As defined in A.3.1.1. |
| NR RF Channel Number | | | 1 | 1 | |
| EPRE ratio of PSS to SSS | | dB | 0 | 0 | |
| EPRE ratio of PBCH_DMRS to SSS | | dB | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | dB | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | dB | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | dB | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | dB | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | dB | | | |
| <p>Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.</p> <p>Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.</p> | | | | | |

Table A.7.3.2.2.1-3: OTA-related test parameters for non-contention based random access test in FR2 for NR Standalone

| Parameter | | Unit | Test-1 | Test-2 | Comments |
|---|--------|------|--|--|--|
| AoA setup | | | Setup 2b | Setup 2b | As defined in A.3.15.2.2. |
| Assumption for UE beams ^{Note 3} | | | Rough | Rough | |
| SSB with index 0 | SSB_RP | dB | [10] dB larger than SSB_RP for SSB index 1 | [10] dB larger than SSB_RP for SSB index 1 | |
| SSB with index 1 | SSB_RP | dB | Minimum SSB_RP value is dependent on band and power class as specified for spherical coverage AoA in Table B.2.2-2 | Minimum SSB_RP value is dependent on band and power class as specified for spherical coverage AoA in Table B.2.2-2 | |
| Configured UE transmitted power ($P_{\text{CMAX}, f, c}$) | | dBm | maximum value configurable for certain power class | maximum value configurable for certain power class | As defined in clause 6.2.4 in TS 38.101-2. |
| PRACH Configuration | | - | FR2 PRACH configuration 2 | FR2 PRACH configuration 3 | As defined in A.3.8.3. |
| <i>preambleReceivedTargetPower</i> | | dBm | -60 | -60 | |
| Propagation Condition | | - | AWGN | AWGN | |
| Note 1: No artificial noise is applied in this test. Note 2: void. Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation | | | | | |

A.7.3.2.2.2.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.7.3.2.2.2.2.1 SSB-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.2.1 for SSB-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -60 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.2.2.2 CSI-RS-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.2.1 for CSI-RS-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions

associated with CSI-RSs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the CSI-RS configured.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-OccasionList*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -60 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.2.3 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -60 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.2.4 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -60 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.3 SA: RRC Connection Release with Redirection

A.7.3.2.3.1 Redirection from NR in FR2 to NR in FR2

A.7.3.2.3.1.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR to NR requirements specified in clause 6.2.3.2.1.

A.7.3.2.3.1.2 Test Parameters

Supported test configurations are shown in table A.7.3.2.3.1.2-1. The time delay is tested by using the parameters in table A.7.3.2.3.1.2-2, and A.7.3.2.3.1.2-3.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2.

Table A.7.3.2.3.1.2-1: Redirection from NR to NR test configurations

| Config | Description |
|--------|--|
| 1 | Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |

Table A.7.3.2.3.1.2-2: General test parameters for Redirection from NR to NR test case

| Parameter | Unit | Value | Comment |
|----------------------------|-------------------|-----------|--|
| Initial conditions | Active cell | Cell 1 | |
| | Neighbouring cell | Cell 2 | |
| Final condition | Active cell | Cell 2 | |
| Filter coefficient | | 0 | L3 filtering is not used |
| Access Barring Information | - | Not Sent | No additional delays in random access procedure. |
| Time offset between cells | | 3 μ s | Synchronous cells |
| T1 | s | 5 | |
| T2 | s | 3.2 | |

Table A.7.3.2.3.1.2-3: Cell specific test parameters for Redirection from NR to NR test case

| Parameter | Unit | Cell 1 | | Cell 2 | |
|-----------|------|--------|----|--------|----|
| | | T1 | T2 | T1 | T2 |

| Assumption for UE beams ^{Note 6} | | | Rough | | Rough | | |
|--|------------------|-----------|--------------------------------|--------|-----------|--------|-------|
| AoA setup | | | Setup TBD as defined in A.3.15 | | | | |
| NR RF Channel Number | | | 1 | | 2 | | |
| Duplex mode | | | TDD | | | | |
| TDD configuration | | | TDDConf.3.1 | | | | |
| BW _{channel} | | MHz | 100: N _{RB,c} = 66 | | | | |
| BWP BW | | MHz | 100: N _{RB,c} = 66 | | | | |
| DRx Cycle | | ms | Not Applicable | | | | |
| PDSCH Reference measurement channel | | | SR3.1 TDD | | | | |
| CORESET Reference Channel | | | CR3.1 TDD | | | | |
| OCNG Patterns | | | OCNG pattern 1 | | | | |
| SMTc configuration | | | SMTc.1 FR2 | | | | |
| PDSCH/PDCCH subcarrier spacing | | kHz | 120 kHz | | | | |
| PUCCH/PUSCH subcarrier spacing | | kHz | 120 kHz | | | | |
| PRACH configuration | | | FR2 PRACH configuration 1 | | | | |
| TRS configuration | | | TRS.2.1 TDD | | | | |
| TCI configuration | | | CSI-RS.Config.0 | | | | |
| BWP configuraiton | Initial DL BWP | | DLBWP.0.1 | | | | |
| | Dedicated DL BWP | | DLBWP.1.1 | | | | |
| | Initial UL BWP | | ULBWP.0.1 | | | | |
| | Dedicated UL BWP | | ULBWP.1.1 | | | | |
| EPRE ratio of PSS to SSS | | dB | 0 | 0 | 0 | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | | |
| N_{oc} ^{Note2} | | dBm/15kHz | -104.7 | -104.7 | -104.7 | -104.7 | |
| N_{oc} ^{Note2} | Config 1,2 | | dBm/SCS | -95.7 | -95.7 | -95.7 | |
| | Config 3 | | dBm/SCS | -95.7 | -95.7 | -95.7 | |
| \hat{E}_s/I_{ot} | | dB | 5 | 5 | -Infinity | 5 | |
| \hat{E}_s/N_{oc} | | dB | 5 | 5 | -Infinity | 5 | |
| I_o ^{Note3} | Config 1,2 | | dBm/BW | -60.5 | -60.5 | -66.7 | -60.5 |
| | Config 3 | | dBm/BW | -60.5 | -60.5 | -66.7 | -60.5 |
| Propagation condition | | - | AWGN | | | | |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | | |
| Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | | | |
| Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | | | |
| Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone | | | | | | | |
| Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone | | | | | | | |
| Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation | | | | | | | |

A.7.3.2.3.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 3160 ms from the beginning of time period T2.

The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{\text{connection_release_redirect_NR}} = T_{\text{RRC_procedure_delay}} + T_{\text{identify-NR}} + T_{\text{SI-NR}} + T_{\text{RACH}}$$

where:

$T_{\text{RRC_procedure_delay}} = 110$ ms in the test.

$T_{\text{identify-NR}} = 1760$ ms in the test.

$T_{\text{SI-NR}} = 1280$ ms, it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target NR cell.

$T_{\text{RACH}} = 10$ ms in the test.

This gives a total of 3160 ms.

A.7.4 Timing

A.7.4.1 UE transmit timing

A.7.4.1.1 NR UE Transmit Timing Test for FR2

A.7.4.1.1.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeB and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1.2.

Supported test configurations are shown in Table 7.4.1.1.1-1.

Table A.7.4.1.1.1-1: Supported test configurations for FR2 PCell

| Configuration | Description |
|---------------|---|
| 1 | NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz |

For this test a single NR cell is used. Tables A.7.4.1.1.1-2 and A.7.4.1.1.1-2A define the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.7.4.1.1.1-3.

Table A.7.4.1.1.1-2: Cell Specific Test Parameters for UL Transmit Timing test

| Parameter | Unit | Config | Test1 | Test2 |
|---------------------------|------|--------|-----------------------------|-------|
| SSB ARFCN | | 1 | Freq1 | Freq1 |
| TDD configuration | | 1 | TDDConf.3.1 | |
| BW _{channel} | MHz | 1 | 100: N _{RB,c} = 66 | |
| Initial BWP Configuration | | 1 | DLBWP.0.1 ULBWP.0.1 | |

| | | | | |
|---|----|---|-----------------------------|-----------------------------|
| Dedicated BWP Configuration | | 1 | DLBWP.1.1 ULBWP.1.1 | |
| TRS Configuration | | 1 | TRS.2.1 TDD | |
| TCI State | | 1 | CSI-RS.Config.0 | |
| DRx Cycle | ms | 1 | N/A | DRX.8 ^{Note5} |
| PDSCH Reference measurement channel | | 1 | SR.3.1 TDD | |
| RMSI CORESET Reference Channel | | 1 | CR.3.1 TDD | |
| Dedicated CORESET Reference Channel | | 1 | CCR.3.1 TDD | |
| OCNG Patterns | | 1 | OP.1 | |
| SSB Configuration | | 1 | SSB.4 FR2 | |
| SMTC Configuration | | 1 | SMTC.1 | |
| EPRE ratio of PSS to SSS | dB | 1 | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | |
| Propagation condition | | 1 | AWGN | |
| SRS Config | | 1 | SRSCConf.1 ^{Note6} | SRSCConf.2 ^{Note6} |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 5: DRx related parameters are given in Table A.3.3.8-1</p> <p>Note 6: SRS configs are given in Table A.7.4.1.1.1-3</p> | | | | |

Table A.7.4.1.1.1-2A: OTA related test parameters

| Parameter | Unit | Test 1 | Test 2 |
|---|--|--------------------------------------|--------|
| Angle of arrival configuration | | Setup 1 according to clause A.3.15.1 | |
| Assumption for UE beams ^{Note 6} | | Fine | |
| N_{oc} ^{Note1} | dBm/15kHz ^{Note4} | -112 | |
| N_{oc} ^{Note1} | dBm/SCS ^{Note3} | -103 | |
| \hat{E}_s/N_{oc} | dB | 4 | |
| SS-RSRP ^{Note2} | dBm/SCS ^{Note4} | -99 | |
| \hat{E}_s/I_{ot} | dB | 4 | |
| I_o ^{Note2} | dBm/95.04 MHz ^{Note4} | -68.5 | |
| Note 1: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | |
| Note 2: | SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | |
| Note 3: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | |
| Note 4: | Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone | | |
| Note 5: | As observed with 0dBi gain antenna at the centre of the quiet zone | | |
| Note 6: | Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation | | |

Table A.7.4.1.1.1-3: SRS Configuration for Timing Accuracy Test

| | Field | SRSCConf.1 | SRSCConf.2 | Comments |
|-----------------|-------------------------------------|------------|-------------------|--------------------------------------|
| SRS-ResourceSet | srs-ResourceSetId | 0 | 0 | |
| | srs-ResourceSetList | 0 | 0 | |
| | resourceType | Periodic | Periodic | |
| | Usage | Codebook | Codebook | |
| SRS-Resource | SRS-ResourceId | 0 | 0 | |
| | nrofSRS-Ports | Port1 | Port1 | |
| | transmissionComb | n2 | n2 | |
| | combOffset-n2 | 0 | 0 | |
| | cyclicShift-n2 | 0 | 0 | |
| | resourceMapping startPosition | 0 | 0 | |
| | resourceMapping nrofSymbols | n1 | n1 | |
| | resourceMapping repetitionFactor | n1 | n1 | |
| | freqDomainPosition | 0 | 0 | |
| | freqDomainShift | 0 | 0 | |
| | freqHopping c-SRS | 17 | 17 | Matches $N_{RB,c}$ |
| | freqHopping b-SRS | 0 | 0 | |
| | freqHopping b-hop | 0 | 0 | |
| | groupOrSequenceHopping | Neither | Neither | |
| | resourceType | Periodic | Periodic | |
| | periodicityAndOffset-p | sl1, 0 | sl2560, 4 | Offset to align with DRx periodicity |
| sequenceId | 0 | 0 | Any 10 bit number | |

Table A.7.4.1.1.1-4: Void**A.7.4.1.1.2 Test requirements**

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test:

- 1) Setup NR PCell according to parameters given in Table A.7.4.1.1.1-1.
- 2) After connection set up with the cell, the test equipment will verify that the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB.
 - a. The N_{TA} offset value (in T_c units) is 13792
 - b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 7.1.2-1
- 3) The test system shall adjust the timing of the DL path by values given in Table A.7.4.1.1.2-1

Table A.7.4.1.1.2-1 Adjustment Value for DL Timing

| SCS of SSB signals (kHz) | Adjustment Value | |
|--------------------------|---------------------|---------------------|
| | Test1 | Test2 |
| 240 | +8*64T _c | +4*64T _c |

- 4) The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in clause 7.1.2 Table 7.1.2-3 until the UE transmit timing offset is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ respective to the first detected path (in time) of DL SSB. Skip this step for test 2 with DRX configured.
- 5) The test system shall verify that the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment.

A.7.4.2 UE timer accuracy

A.7.4.3 Timing advance

A.7.4.3.1 SA FR2 timing advance adjustment accuracy

A.7.4.3.1.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3.

A.7.4.3.1.2 Test Parameters

Supported test configurations are shown in table A.7.4.3.1.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.7.4.3.1.2-2, A.7.4.3.1.2-3 and A.7.4.3.1.2-4.

In all test cases, single cell is used. Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.7.4.3.1.2-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured.

During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element, as specified in clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31, which according to clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements, with Timing Advance Command value specified in table A.7.4.3.1.2-2. This value shall result in changes of the timing advance used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in Clause 7.3.2.1, the UE adjusts its uplink timing at slot n+k for a timing advance command received in slot n. This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in Clause 5.2 in TS 38.321 [7], shall be configured so that it does not expire in the duration of the test.

Table A.7.4.3.1.2-1: Timing advance supported test configurations

| Config | Description |
|--------|--|
| 1 | NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |

Table A.7.4.3.1.2-2: General test parameters for timing advance

| Parameter | Unit | Value | Comment |
|--|------|-----------|---|
| RF channel number | | 1 | |
| Initial DL BWP | | DLBWP.0.1 | As specified in Table A.3.9.2.1-1 |
| Dedicated DL BWP | | DLBWP.1.1 | As specified in Table A.3.9.2.2-1 |
| Initial UL BWP | | ULBWP.0.1 | As specified in Table A.3.9.3.1-1 |
| Dedicated UL BWP | | ULBWP.1.1 | As specified in Table A.3.9.3.2-1 |
| Timing Advance Command (T_A) value during T1 | | 31 | $N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2 |
| Timing Advance Command (T_A) value during T2 | | 39 | For 120 kHz SCS $N_{TA_new} = N_{TA_old} + 1024 * T_c$ (based on equation in clause 4.2 of TS 38.213 [3]) |
| T1 | s | 5 | |
| T2 | s | 5 | |

Table A.7.4.3.1.2-3: Cell specific test parameters for timing advance

| Parameter | Unit | Test1 | |
|--|--|----------------------|----|
| | | T1 | T2 |
| Duplex mode | | TDD | |
| TDD configuration | | TDDConf.3.1 | |
| $BW_{channel}$ | MHz | 100: $N_{RB,c} = 66$ | |
| BWP BW | MHz | 100: $N_{RB,c} = 66$ | |
| DRx Cycle | ms | Not Applicable | |
| PDSCH Reference measurement channel | | SR.3.1 TDD | |
| CORESET Reference Channel | | CR.3.1 TDD | |
| OCNG Patterns | | OCNG pattern 1 | |
| TRS configuration | | TRS.2.1 TDD | |
| TCI configuration | | CSI-RS.Config.0 | |
| SMTc configuration | | SMTc.1 FR2 | |
| SSB Configuration | | SSB.3 FR2 | |
| PDSCH/PDCCH subcarrier spacing | kHz | 120 kHz | |
| PUCCH/PUSCH subcarrier spacing | kHz | 120 kHz | |
| EPRE ratio of PSS to SSS | dB | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | |
| Propagation condition | - | AWGN | |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | |
| Note 3: | Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | |
| Note 4: | Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone | | |
| Note 5: | As observed with 0 dBi gain antenna at the centre of the quiet zone | | |

Table A.7.4.3.1.2-3A: OTA related test parameters

| Parameter | Unit | Test 1 | |
|---|--------------------------------|--------------------------------------|----|
| | | T1 | T2 |
| Angle of arrival configuration | | Setup 1 according to clause A.3.15.1 | |
| Assumption for UE beams ^{Note 6} | | Fine | |
| N_{oc} ^{Note1} | dBm/15kHz ^{Note4} | -112 | |
| N_{oc} ^{Note1} | dBm/SCS ^{Note3} | -103 | |
| \hat{E}_s/N_{oc} | dB | 4 | |
| SS-RSRP ^{Note2} | dBm/SCS ^{Note4} | -99 | |
| \hat{E}_s/I_{ot} | dB | 4 | |
| I_o ^{Note2} | dBm/95.04 MHz ^{Note4} | -68.5 | |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone</p> <p>Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation</p> | | | |

Table A.7.4.3.1.2-4: Sounding Reference Symbol Configuration for timing advance

| Field | Value | Comment |
|--|-------------|--|
| c-SRS | 16 | Frequency hopping is disabled |
| b-SRS | 0 | |
| b-hop | 0 | |
| freqDomainPosition | 0 | Frequency domain position of SRS |
| freqDomainShift | 0 | |
| groupOrSequenceHopping | neither | No group or sequence hopping |
| SRS-PeriodicityAndOffset | sl5=0 | Once every 5 slots |
| pathlossReferenceRS | ssb-Index=0 | SSB #0 is used for SRS path loss estimation |
| usage | Codebook | Codebook based UL transmission |
| startPosition | 0 | resourceMapping setting. SRS on last symbol of slot, and 1 symbols for SRS without repetition. |
| nrofSymbols | n1 | |
| repetitionFactor | n1 | |
| combOffset-n2 | 0 | transmissionComb setting |
| cyclicShift-n2 | 0 | |
| nrofSRS-Ports | port1 | Number of antenna ports used for SRS transmission |
| Note: For further information see clause 6.3.2 in TS 38.331 [2]. | | |

A.7.4.3.1.3 Test Requirements

The UE shall apply the signalled Timing Advance value to the transmission timing at the designated activation time i.e. $k+1$ slots after the reception of the timing advance command, where $k = 11$.

The Timing Advance adjustment accuracy shall be within the limits specified in clause 7.3.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.7.5 Signaling characteristics

A.7.5.1 Radio link Monitoring

In the following clause, any uplink signal transmitted by the UE is used for detecting the In-/Out-of-Sync state of the UE. In terms of measurement, the uplink signal is verified on the basis of the UE output power:

Editor note: The metric for the detection of the UE UL transmitted signal by the TE is FFS.

A.7.5.1.1 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode

A.7.5.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.7.5.1.1.1-1. The test parameters are given in Tables A.7.5.1.1.1-2, A.7.5.1.1.1-3, and A.7.5.1.1.1-4 below. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.7.5.1.1.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states, and Figure A.7.5.1.1.1-2 shows the Time multiplexed downlink transmissions from each Angle of Arrival. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In addition to RLM-RS radio link monitoring using SSB index 0 and SSB index 1, the UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 1.

Table A.7.5.1.1.1-1: Supported test configurations for FR2 PCell

| Configuration | Description |
|---------------|---|
| 1 | TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz |

Table A.7.5.1.1.1-2: General test parameters for FR2 out-of-sync testing in non-DRX mode

| Parameter | | Unit | Value |
|---|--|------|-----------------------------|
| | | | Test 1 |
| Active PCell | | | Cell 1 |
| RF Channel Number | | | 1 |
| Duplex mode | Config 1 | | TDD |
| BW _{channel} | Config 1 | | 100: N _{RB,c} = 66 |
| DL initial BWP configuration | Config 1 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1 | | ULBWP.1.1 |
| TDD Configuration | Config 1 | | TDDConf.3.1 |
| CORESET Reference Channel | Config 1 | | CR.3.1 TDD |
| SSB Configuration | Config 1 | | SSB.1 FR2 |
| SMTC Configuration | Config 1 | | SMTC.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1 | | 120 KHz |
| PRACH Configuration | Config 1 | | Table A.3.8.3.4 |
| SSB index assigned as RLM RS | Config 1 | | 0,1 |
| OCNG parameters | | | OP.2 |
| CP length | | | Normal |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average SSS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| DRX | | | OFF |
| Gap pattern ID | | | gp0 |
| Layer 3 filtering | | | Enabled |
| T310 timer | | ms | 0 |
| T311 timer | | ms | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |
| CSI-RS for CSI reporting | Config 1 | | CSI-RS.3.1 TDD |
| TCI states for PDCCH/PDSCH | | | TCI.State.2 |
| CSI-RS for tracking | Config 1 | | TRS.2.1 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 9.68 |
| T3 | | s | 9.68 |
| D1 | | s | 9.64 |
| Note 1: All configurations are assigned to the UE prior to the start of time period T1. | | | |
| Note 2: UE-specific PDCCH is not transmitted after T1 starts. | | | |

Table A.7.5.1.1.1-3: OTA related cell specific test parameters for FR2 (Cell 1) for out-of-sync radio link monitoring tests in non-DRX mode

| Parameter | Unit | Test 1 | | | | | | |
|--|----------|---------------------------|---------------------------------|----|----------|-----------------|-----|-----|
| | | T1 | T2 | T3 | T1 | T2 | T3 | |
| AoA setup | | Setup 3 defined in A.3.15 | | | | | | |
| | | AoA1 | | | AoA2 | | | |
| EPRE ratio of PDCCH DMRS to SSS | dB | 4 | | | Not sent | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | dB | 0 | | | | | | |
| EPRE ratio of PBCH DMRS to SSS | dB | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | dB | | | | | | | |
| EPRE ratio of PSS to SSS | dB | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | dB | | | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | dB | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS | dB | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | dB | | | | | | | |
| ssb-Index 0 SNR | Config 1 | dB | 2 | -6 | -15 | | | |
| ssb-Index 1 SNR | Config 1 | | Not sent | | | 2 | -15 | -15 |
| SNR on other channels and signals | Config 1 | dB | 2 | | | N/A | | |
| N_{oc} | Config 1 | dBm/15kHz | -92.1 | | | -92.1 | | |
| Time multiplexing of the downlink transmissions from each AoA | | | Defined in Figure A.7.5.1.1.1-2 | | | | | |
| Propagation condition | | | TDL-A 30ns 75Hz | | | TDL-A 30ns 75Hz | | |
| Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6. | | | | | | | | |

Table A.7.5.1.1.1-4: Measurement gap configuration for out-of-sync tests in non-DRX mode

| Field | Test 1 |
|-----------|--------|
| | Value |
| gapOffset | 0 |

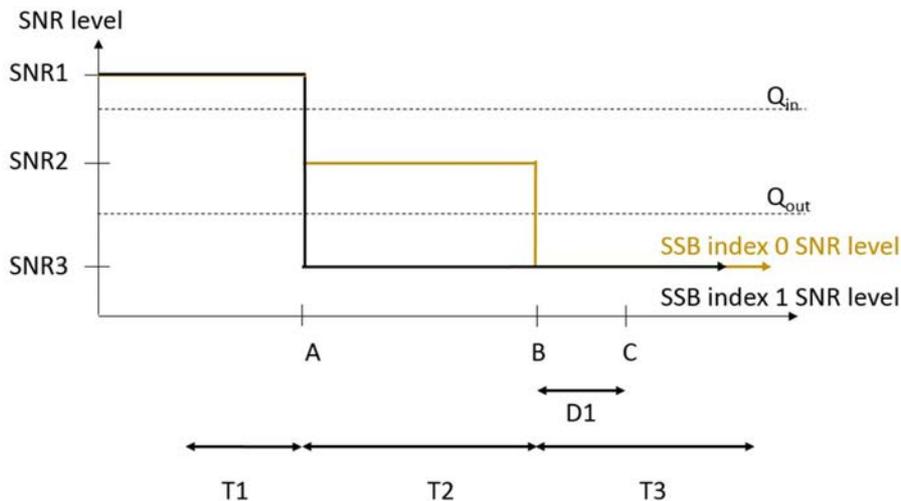


Figure A.7.5.1.1.1-1: SNR variation for out-of-sync testing

Table A.7.5.1.2.1-1: Supported test configurations for FR2 PCell

| Configuration | Description |
|---------------|---|
| 1 | TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz |

Table A.7.5.1.2.1-2: General test parameters for FR2 in-sync testing in non-DRX mode

| Parameter | | Unit | Value Test 1 |
|-------------------------------------|--|------|-----------------------------|
| Active PCell | | | Cell 1 |
| RF Channel Number | | | 1 |
| Duplex mode | Config 1 | | TDD |
| BW _{channel} | Config 1 | | 100: N _{RB,c} = 66 |
| DL initial BWP configuration | Config 1 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1 | | ULBWP.1.1 |
| TDD Configuration | Config 1 | | TDDConf.3.1 |
| CORESET Reference Channel | Config 1 | | CR.3.1 TDD |
| SSB Configuration | Config 1 | | SSB.1 FR2 |
| SMTC Configuration | Config 1 | | SMTC.3 |
| PDSCH/PDCCH subcarrier spacing | Config 1 | | 120 KHz |
| PRACH Configuration | Config 1 | | Table A.3.8.3.4 |
| SSB index assigned as RLM RS | Config 1 | | 0,1 |
| OCNG parameters | | | OP.2 |
| CP length | | | Normal |
| In sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 4 |
| | Ratio of hypothetical PDCCH RE energy to average SSS RE energy | dB | 0 |
| | Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | dB | 0 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average SSS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| DRX | | | OFF |
| Gap pattern ID | | | N.A. |
| Layer 3 filtering | | | Enabled |
| T310 timer | | ms | 4000 |
| T311 timer | | ms | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |
| CSI-RS for CSI reporting | Config 1 | | CSI-RS.3.1 TDD |
| TCI states for PDCCH/PDSCH | | | TCI.State.2 |
| CSI-RS for tracking | Config 1 | | TRS.2.1 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 0.2 |
| T3 | | s | 1.88 |

| | | |
|---|---|------|
| T4 | s | 0.2 |
| T5 | s | 3.84 |
| D1 | s | 3.8 |
| Note 1: All configurations are assigned to the UE prior to the start of time period T1. | | |
| Note 2: UE-specific PDCCH is not transmitted after T1 starts. | | |

Table A.7.5.1.2.1-3: OTA related cell specific test parameters for FR2 (Cell 1) for in-sync radio link monitoring tests in non-DRX mode

| Parameter | Unit | Test 1 | | | | | | | | | | |
|---|----------|---------------------------|---------------------------------|----|-----|------|----------|-----------------|-----|-----|-----|-----|
| | | T1 | T2 | T3 | T4 | T5 | T1 | T2 | T3 | T4 | T5 | |
| AoA setup | | Setup 3 defined in A.3.15 | | | | | | | | | | |
| | | AoA1 | | | | | AoA2 | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | dB | 4 | | | | | Not sent | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | dB | 0 | | | | | | | | | | |
| EPRE ratio of PBCH DMRS to SSS | dB | | | | | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | dB | | | | | | | | | | | |
| EPRE ratio of PSS to SSS | dB | | | | | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | dB | | | | | | | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | dB | | | | | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS | dB | | | | | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | dB | | | | | | | | | | | |
| ssb-Index 0 SNR | Config 1 | dB | 2 | -6 | -15 | -4.5 | 2 | | | | | |
| ssb-Index 1 SNR | Config 1 | | Not sent | | | | | 2 | -15 | -15 | -15 | -15 |
| SNR on other channels and signals | Config 1 | dB | 2 | | | | | N/A | | | | |
| N_{oc} | Config 1 | dBm/15kHz | -92.1 | | | | | -92.1 | | | | |
| Time multiplexing of the downlink transmissions from each AoA | | | Defined in Figure A.7.5.1.2.1-2 | | | | | | | | | |
| Propagation condition | | | TDL-A 30ns 75Hz | | | | | TDL-A 30ns 75Hz | | | | |

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.

Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.

Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.

Table A.7.5.1.2.1-4: Void

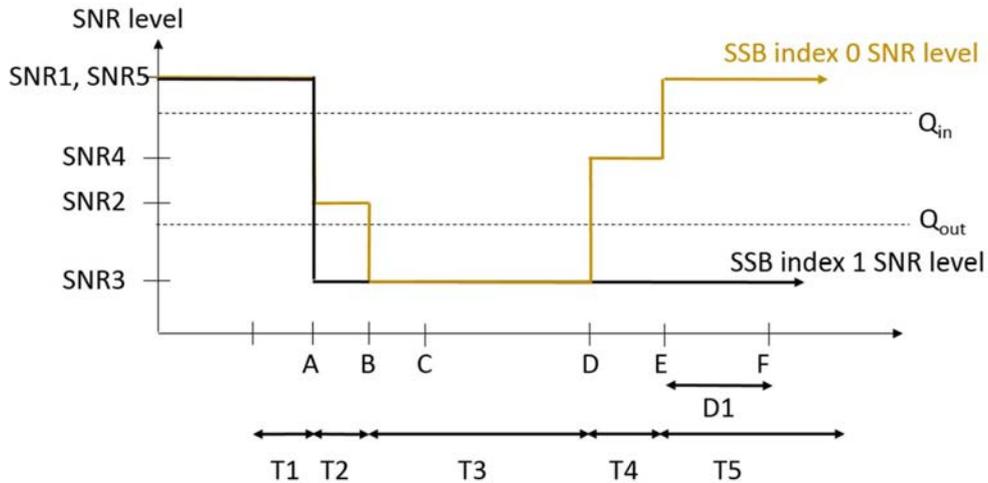


Figure A.7.5.1.2.1-1: SNR variation for in-sync testing

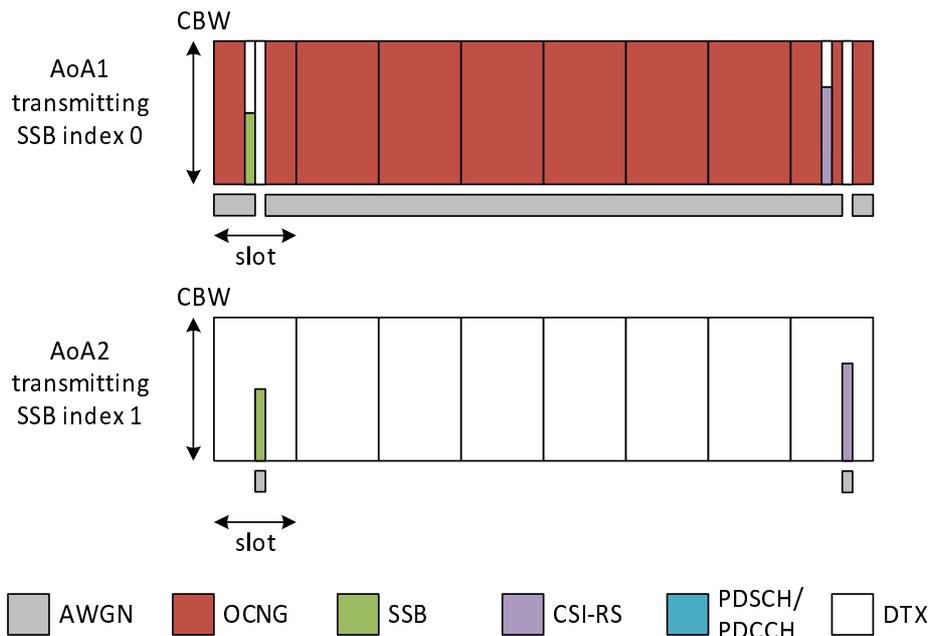


Figure A.7.5.1.2.1-2: Time multiplexed downlink transmissions

A.7.5.1.2.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.1.3 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode

A.7.5.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.7.5.1.3.1-1. The test parameters are given in Tables A.7.5.1.3.1-2, and A.7.5.1.3.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.7.5.1.3.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.7.5.1.3.1-1: Supported test configurations for FR2 PCell

| Configuration | Description |
|---------------|---|
| 1 | TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz |

Table A.7.5.1.3.1-2: General test parameters for FR2 out-of-sync testing in DRX mode

| Parameter | | Unit | Value |
|---|--|------|-----------------------------|
| | | | Test 1 |
| Active PCell | | | Cell 1 |
| RF Channel Number | | | 1 |
| Duplex mode | Config 1 | | TDD |
| BW _{channel} | Config 1 | | 100: N _{RB,c} = 66 |
| DL initial BWP configuration | Config 1 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1 | | ULBWP.1.1 |
| TDD Configuration | Config 1 | | TDDConf.3.1 |
| CORESET Reference Channel | Config 1 | | CR.3.1 TDD |
| SSB Configuration | Config 1 | | SSB.1 FR2 |
| SMTC Configuration | Config 1 | | SMTC.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1 | | 120 KHz |
| PRACH Configuration | Config 1 | | Table A.3.8.3.4 |
| SSB index assigned as RLM RS | Config 1 | | 0,1 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average SSS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| REG bundle size | | | 6 |
| DRX Configuration | | | DRX.3 |
| Gap pattern ID | | | N.A. |
| Layer 3 filtering | | | <i>Enabled</i> |
| T310 timer | | ms | 0 |
| T311 timer | | ms | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |
| CSI-RS for CSI reporting | Config 1 | | CSI-RS.3.1 TDD |
| TCI states for PDCCH/PDSCH | | | TCI.State.2 |
| CSI-RS for tracking | Config 1 | | TRS.2.1 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 14.48 |
| T3 | | s | 14.48 |
| D1 | | s | 14.44 |
| Note 1: All configurations are assigned to the UE prior to the start of time period T1. | | | |
| Note 2: UE-specific PDCCH is not transmitted after T1 starts. | | | |

Table A.7.5.1.3.1-3: OTA related cell specific test parameters for FR2 (Cell 1) for out-of-sync radio link monitoring tests in DRX mode

| Parameter | | Unit | Test 1 | | |
|---|----------|------------|---------------------------|-----|-----|
| | | | T1 | T2 | T3 |
| AoA setup | | | Setup 1 defined in A.3.15 | | |
| EPRE ratio of PDCCH DMRS to SSS | | dB | 4 | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | dB | 0 | | |
| EPRE ratio of PBCH DMRS to SSS | | dB | 0 | | |
| EPRE ratio of PBCH to PBCH DMRS | | dB | | | |
| EPRE ratio of PSS to SSS | | dB | | | |
| EPRE ratio of PDSCH DMRS to SSS | | dB | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | dB | | | |
| EPRE ratio of OCNG DMRS to SSS | | dB | | | |
| EPRE ratio of OCNG to OCNG DMRS | | dB | | | |
| ssb-Index 0 SNR | Config 1 | dB | 2 | -6 | -15 |
| ssb-Index 1 SNR | Config 1 | dB | 2 | -15 | -15 |
| SNR on other channels and signals | Config 1 | dB | 2 | | |
| N_{oc} | Config 1 | dBm/15K Hz | -104.7dBm | | |
| Propagation condition | | | TDL-A 30ns 75Hz | | |
| Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | |
| Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. | | | | | |
| Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs. | | | | | |
| Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6. | | | | | |

Table A.7.5.1.3.1-4: Void

Table A.7.5.1.3.1-5: Void

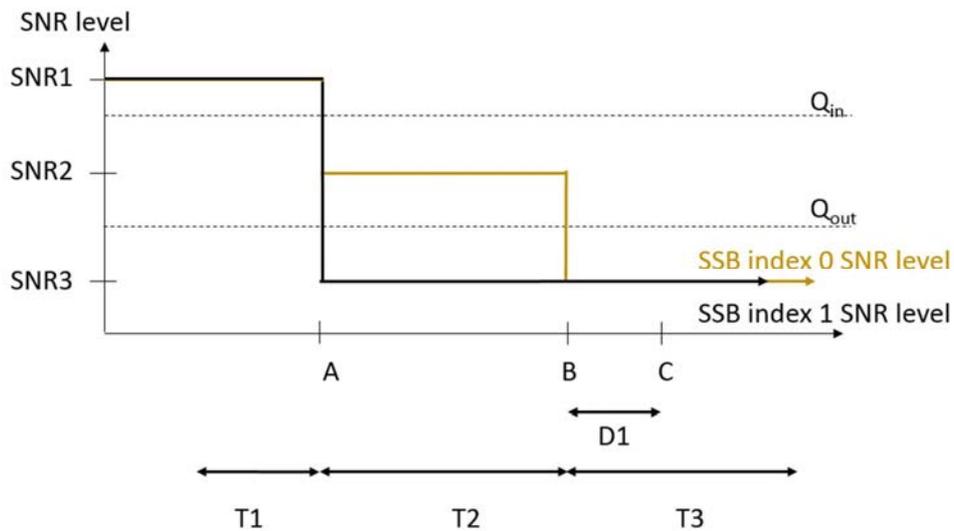


Figure A.7.5.1.3.1-1: SNR variation for out-of-sync testing

A.7.5.1.3.2 Test Requirements

The UE behavior in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.1.4 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode

A.7.5.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.7.5.1.4.1-1. The test parameters are given in Tables A.7.5.1.4.1-2, and A.7.5.1.4.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.1.4.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.7.5.1.4.1-1: Supported test configurations for FR2 PCell

| Configuration | Description |
|---------------|---|
| 1 | TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz |

Table A.7.5.1.4.1-2: General test parameters for FR2 in-sync testing in DRX mode

| Parameter | | Unit | Value |
|-------------------------------------|--|-----------------|-----------------------------|
| | | | Test 1 |
| Active PCell | | | Cell 1 |
| RF Channel Number | | | 1 |
| Duplex mode | Config 1 | | TDD |
| BW _{channel} | Config 1 | | 100: N _{RB,c} = 66 |
| DL initial BWP configuration | Config 1 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1 | | ULBWP.1.1 |
| TDD Configuration | Config 1 | | TDDConf.3.1 |
| CORESET Reference Channel | Config 1 | | CR.3.1 TDD |
| SSB Configuration | Config 1 | | SSB.1 FR2 |
| SMTC Configuration | Config 1 | | SMTC.3 |
| PDSCH/PDCCH subcarrier spacing | Config 1 | | 120 KHz |
| PRACH Configuration | Config 1 | | Table A.3.8.3.4 |
| SSB index assigned as RLM RS | Config 1 | | 0,1 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| In sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 4 |
| | Ratio of hypothetical PDCCH RE energy to average SSS RE energy | dB | 0 |
| | Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | dB | 0 |
| | DMRS precoder granularity | | REG bundle size |
| Out of sync transmission parameters | REG bundle size | | 6 |
| | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average SSS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy | dB | 4 |
| DMRS precoder granularity | | REG bundle size | |
| REG bundle size | | 6 | |
| DRX Configuration | | | DRX.11 |
| Gap pattern ID | | | N.A. |
| Layer 3 filtering | | | <i>Enabled</i> |
| T310 timer | | ms | 4000 |
| T311 timer | | ms | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |
| CSI-RS for CSI reporting | Config 1 | | CSI-RS.3.1 TDD |
| TCI states for PDCCH/PDSCH | | | TCI.State.2 |
| CSI-RS for tracking | Config 1 | | TRS.2.1 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 0.2 |
| T3 | | s | 2.8 |
| T4 | | s | 0.2 |
| T5 | | s | 3.88 |
| D1 | | s | 3.84 |

| | |
|---------|---|
| Note 1: | All configurations are assigned to the UE prior to the start of time period T1. |
| Note 2: | UE-specific PDCCH is not transmitted after T1 starts. |

Table A.7.5.1.4.1-3: OTA related cell specific test parameters for FR2 (Cell 1) for in-sync radio link monitoring test in DRX mode

| Parameter | | Unit | Test 1 | | | | |
|-----------------------------------|----------|---|---------------------------|-----|-----|------|-----|
| | | | T1 | T2 | T3 | T4 | T5 |
| AoA setup | | | Setup 1 defined in A.3.15 | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | dB | 4 | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | dB | 0 | | | | |
| EPRE ratio of PBCH DMRS to SSS | | dB | 0 | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | dB | | | | | |
| EPRE ratio of PSS to SSS | | dB | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | dB | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | dB | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | dB | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | dB | | | | | |
| ssb-Index 0 SNR | Config 1 | dB | 2 | -6 | -15 | -4.5 | 2 |
| ssb-Index 1 SNR | Config 1 | | 2 | -15 | -15 | -15 | -15 |
| SNR on other channels and signals | Config 1 | dB | 2 | | | | |
| N_{oc} | Config 1 | dBm/1 5KHz | -104.7dBm | | | | |
| Propagation condition | | | TDL-A 30ns 75Hz | | | | |
| Note 1: | | OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | |
| Note 2: | | The signal contains PDCCH for UEs other than the device under test as part of OCNG.3 | | | | | |
| Note 3: | | SNR levels correspond to the signal to noise ratio over the SSS REs. | | | | | |
| Note 4: | | The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6. | | | | | |

Table A.7.5.1.4.1-4: Void

Table A.7.5.1.4.1-5: Void

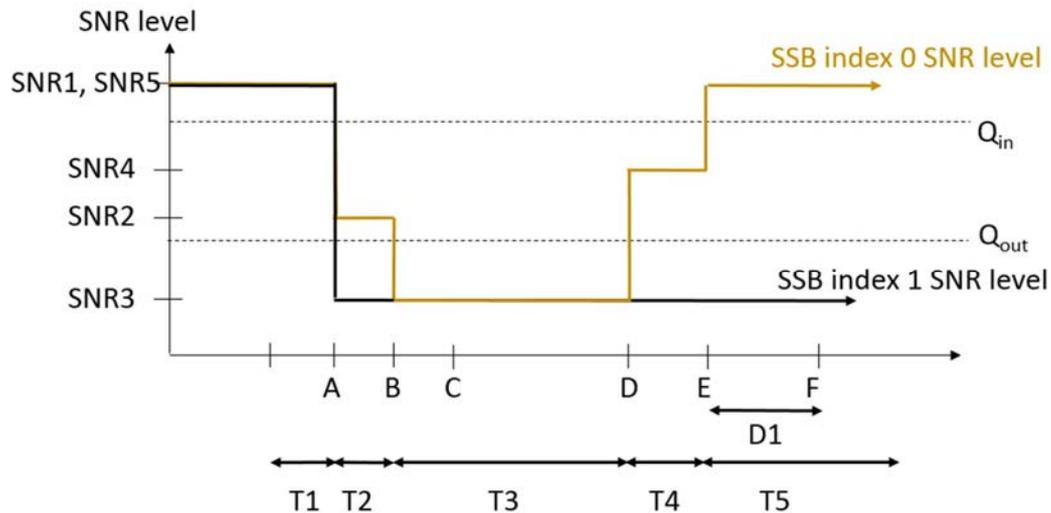


Figure A.7.5.1.4.1-1: SNR variation for in-sync testing

A.7.5.1.4.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.1.5 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode

A.7.5.1.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR2 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.7.5.1.5.1-1, A.7.5.1.5.1-2, A.7.5.1.5.1-3 and A.7.5.1.5.1-4 below. There is one cell, cell 1 which is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.7.5.1.5.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 10 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.7.5.1.5.1-1: Supported test configurations for FR2 PCell

| Configuration | Description |
|----------------------|---|
| 1 | TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth |

Table A.7.5.1.5.1-2: General test parameters for FR2 PCell for CSI-RS out-of-sync testing in non-DRX mode

| Parameter | | Unit | Value |
|---|---|------|--|
| | | | Test 1 |
| Active PCell | | | Cell 1 |
| RF Channel Number | | | 1 |
| Duplex mode | Config 1 | | TDD |
| TDD Configuration | Config 1 | | TDDConf.3.1 |
| DL initial BWP configuration | Config 1 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1 | | ULBWP.1.1 |
| CORESET Reference Channel | Config 1 | | CCR.3.1 TDD CCR.3.3 TDD |
| SSB Configuration | Config 1 | | SSB.1 FR2 |
| SMTC Configuration | Config 1 | | SMTC.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1 | | 120 KHz |
| CSI-RS for RLM | Config 1 | | Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD |
| TRS configuration | | | TRS.2.1 TDD TRS.2.2 TDD |
| TCI configuration for PDCCH#1/PDSCH | | | TCI.State.2 |
| TCI configuration for PDCCH#2 | | | TCI.State.3 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| REG bundle size | | | 6 |
| DRX | | | OFF |
| Gap pattern ID | | | *gp0 |
| Layer 3 filtering | | | Enabled |
| T310 timer | | ms | 0 |
| T311 timer | | ms | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |
| CSI-RS for CSI reporting | Config 1 | | CSI-RS.3.1 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 0.35 |
| T3 | | s | 0.35 |
| D1 | | s | 0.31 |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | |

Table A.7.5.1.5.1-3: Cell specific test parameters for FR2 for CSI-RS out-of-sync radio link monitoring in non-DRX mode

| Parameter | | Unit | Test 1 | | | | | |
|-----------------------------------|---|-----------|---------------------------|----|-----|-------------------|-----|-----|
| | | | T1 | T2 | T3 | T1 | T2 | T3 |
| AoA setup | | | Setup 3 defined in A.3.15 | | | | | |
| | | | AoA1 | | | AoA2 | | |
| PDCCH_beta | | dB | 4 | | | Not sent | | |
| PDCCH_DMRS_beta | | dB | 4 | | | | | |
| PBCH_beta | | dB | 0 | | | | | |
| PSS_beta | | dB | | | | | | |
| SSS_beta | | dB | | | | | | |
| PDSCH_beta | | dB | | | | | | |
| OCNG_beta | | dB | | | | | | |
| SNR on RLM-RS1 | Config 1 | dB | 2 | -6 | -15 | | | |
| SNR on RLM-RS2 | Config 1 | | Not sent | | | 2 | -14 | -15 |
| SNR on other channels and signals | Config 1 | dB | 2 | | | N/A | | |
| N_{oc} | Config 1 | dBm/15kHz | TBD | | | TBD | | |
| Propagation condition | | | TDL-C 300ns 100Hz | | | TDL-C 300ns 100Hz | | |
| Note 1: | OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | | |
| Note 2: | The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | | | |
| Note 3: | NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | | | |
| Note 4: | Measurement gap configuration is assigned to the UE prior to the start of time period T1. | | | | | | | |
| Note 5: | The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. | | | | | | | |
| Note 6: | The signal contains PDCCH for UEs other than the device under test as part of OCNG. | | | | | | | |
| Note 7: | SNR levels correspond to the signal to noise ratio over the SSS REs. | | | | | | | |
| Note 8: | The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.1.5.1-1. | | | | | | | |
| Note 9: | The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6. | | | | | | | |

Table A.7.5.1.5.1-4: Measurement gap configuration for FR2 CSI-RS out-of-sync radio link monitoring in non-DRX mode

| Field | Test 1 |
|-----------|---|
| | Value |
| gapOffset | 0 |
| Note 1: | RLM RS is partially overlapped with measurement gap |

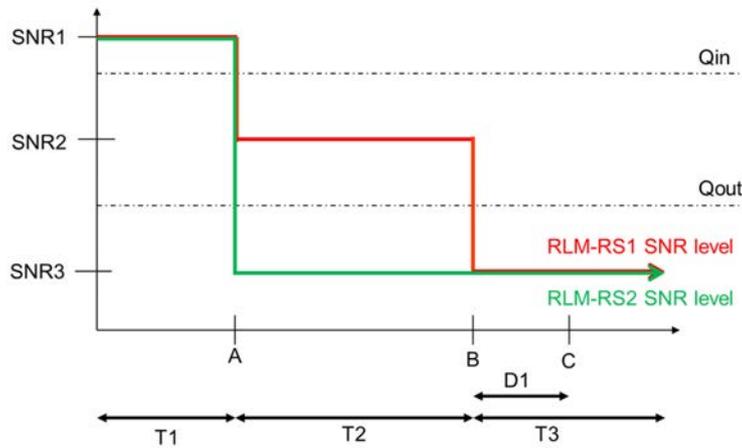


Figure A.7.5.1.5.1-1: SNR variation for CSI-RS out-of-sync testing

A.7.5.1.5.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During time durations T1, T2 and T3, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 no later than time point C (D_1 second after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.1.6 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode

A.7.5.1.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR2 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.7.5.1.6.1-1, A.7.5.1.6.1-2 and A.7.5.1.6.1-3 below. There is one cells, cell 1 which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.1.6.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 10 ms. In the test, DRX configuration is not enabled. In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.7.5.1.6.1-1: Supported test configurations for FR2 PCell

| Configuration | Description |
|---------------|---|
| 1 | TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth |

Table A.7.5.1.6.1-2: General test parameters for FR2 PCell for CSI-RS in-sync testing in non-DRX mode

| Parameter | | Unit | Value |
|-------------------------------------|---|------|--|
| | | | Test 1 |
| Active PCell | | | Cell 1 |
| RF Channel Number | | | 1 |
| Duplex mode | Config 1 | | TDD |
| TDD Configuration | Config 1 | | TDDConf.3.1 |
| DL initial BWP configuration | Config 1 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1 | | ULBWP.1.1 |
| CORESET Reference Channel | Config 1 | | CCR.3.1 TDD CCR.3.3 TDD |
| SSB Configuration | Config 1 | | SSB.1 FR2 |
| SMTc Configuration | Config 1 | | SMTc.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1 | | 120 KHz |
| CSI-RS for RLM | Config 1 | | Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD |
| TRS configuration | | | TRS.2.1 TDD TRS.2.2 TDD |
| TCI configuration for PDCCH#1/PDSCH | | | TCI.State.2 |
| TCI configuration for PDCCH#2 | | | TCI.State.3 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| In sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 4 |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| DRX | | | OFF |
| Gap pattern ID | | | N.A. |
| Layer 3 filtering | | | <i>Enabled</i> |
| T310 timer | | ms | 1000 |
| T311 timer | | ms | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |

| | | | |
|---|----------|---|----------------|
| CSI-RS for CSI reporting | Config 1 | | CSI-RS.3.1 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 0.2 |
| T3 | | s | 0.24 |
| T4 | | s | 0.2 |
| T5 | | s | 0.88 |
| D1 | | s | 0.84 |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | |

Table A.7.5.1.6.1-3: Cell specific test parameters for FR2 for CSI-RS in-sync radio link monitoring in non-DRX mode

| Parameter | Unit | Test 1 | | | | | | | | | | |
|-----------------------------------|----------|---------------------------|-------------------|----|-----|------|----------|-------------------|-----|-----|-----|-----|
| | | T1 | T2 | T3 | T4 | T5 | T1 | T2 | T3 | T4 | T5 | |
| AoA setup | | Setup 3 defined in A.3.15 | | | | | | | | | | |
| | | AoA1 | | | | | AoA2 | | | | | |
| PDCCH_beta | dB | 4 | | | | | Not sent | | | | | |
| PDCCH_DMRS_beta | dB | 4 | | | | | | | | | | |
| PBCH_beta | dB | 0 | | | | | | | | | | |
| PSS_beta | dB | | | | | | | | | | | |
| SSS_beta | dB | | | | | | | | | | | |
| PDSCH_beta | dB | | | | | | | | | | | |
| OCNG_beta | dB | | | | | | | | | | | |
| SNR on RLM-RS1 | Config 1 | dB | 2 | -6 | -15 | -4.5 | 2 | | | | | |
| SNR on RLM-RS2 | Config 1 | dB | Not sent | | | | | 2 | -14 | -15 | -15 | -14 |
| SNR on other channels and signals | Config 1 | dB | 2 | | | | | N/A | | | | |
| N_{oc} | Config 1 | dBm/15KHz | TBD | | | | | TBD | | | | |
| Propagation condition | | | TDL-C 300ns 100Hz | | | | | TDL-C 300ns 100Hz | | | | |

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.

Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.

Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.

Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.

Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.

Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.

Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.7.5.1.6.1-1.

Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.

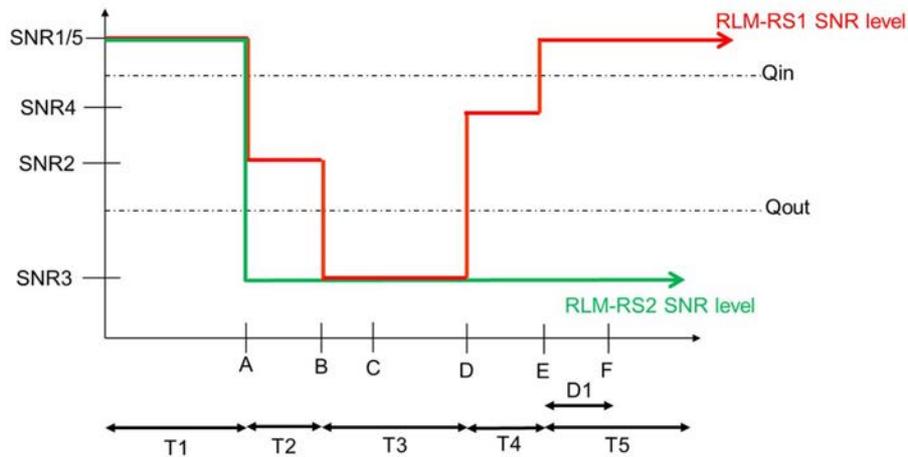


Figure A.7.5.1.6.1-1: SNR variation for CSI-RS in-sync testing

A.7.5.1.6.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.1.7 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode

A.7.5.1.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR2 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.7.5.1.7.1-1, A.7.5.1.7.1-2, and A.7.5.1.7.1-3 below. There is one cell, cell 1 is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.7.5.1.7.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 10 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test. In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.7.5.1.7.1-1: Supported test configurations for FR2 PCell

| Configuration | Description |
|---------------|---|
| 1 | TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth |

Table A.7.5.1.7.1-2: General test parameters for FR2 PCell for CSI-RS out-of-sync testing in DRX mode

| Parameter | | Unit | Value |
|---|---|------|--|
| | | | Test 1 |
| Active PCell | | | Cell 1 |
| RF Channel Number | | | 1 |
| Duplex mode | Config 1 | | TDD |
| TDD Configuration | Config 1 | | TDDConf.3.1 |
| DL initial BWP configuration | Config 1 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1 | | ULBWP.1.1 |
| CORESET Reference Channel | Config 1 | | CCR.3.1 TDD CCR.3.3 TDD |
| SSB Configuration | Config 1 | | SSB.1 FR2 |
| SMTC Configuration | Config 1 | | SMTC.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1 | | 120 KHz |
| CSI-RS for RLM | Config 1 | | Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD |
| TRS configuration | | | TRS.2.1 TDD TRS.2.2 TDD |
| TCI configuration for PDCCH#1/PDSCH | | | TCI.State.2 |
| TCI configuration for PDCCH#2 | | | TCI.State.3 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| REG bundle size | | | 6 |
| DRX | | | DRX.3 |
| Gap pattern ID | | | N.A. |
| Layer 3 filtering | | | <i>Enabled</i> |
| T310 timer | | ms | 0 |
| T311 timer | | ms | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |
| CSI-RS for CSI reporting | Config 1 | | CSI-RS.3.1 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 1.28 |
| T3 | | s | 1.28 |
| D1 | | s | 1.24 |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | |

Table A.7.5.1.7.1-3: Cell specific test parameters for FR2 for CSI-RS out-of-sync radio link monitoring in DRX mode

| Parameter | | Unit | Test 1 | | |
|--|----------|-----------|---------------------------|-----|-----|
| | | | T1 | T2 | T3 |
| AoA setup | | dB | Setup 1 defined in A.3.15 | | |
| PDCCH_beta | | dB | 4 | | |
| PDCCH_DMRS_beta | | dB | 4 | | |
| PBCH_beta | | dB | 0 | | |
| PSS_beta | | dB | | | |
| SSS_beta | | dB | | | |
| PDSCH_beta | | dB | | | |
| OCNG_beta | | dB | | | |
| SNR on RLM-RS1 | Config 1 | dB | 2 | -6 | -15 |
| SNR on RLM-RS2 | Config 1 | dB | 2 | -14 | -15 |
| SNR on other channels and signals | Config 1 | dB | 2 | | |
| N_{oc} | Config 1 | dBm/15KHz | -104.7 | | |
| Propagation condition | | | TDL-C 300ns 100Hz | | |
| <p>Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.</p> <p>Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.</p> <p>Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.</p> <p>Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.</p> <p>Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.</p> <p>Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.</p> <p>Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.1.7.1-1.</p> <p>Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is [A.3.6].</p> | | | | | |

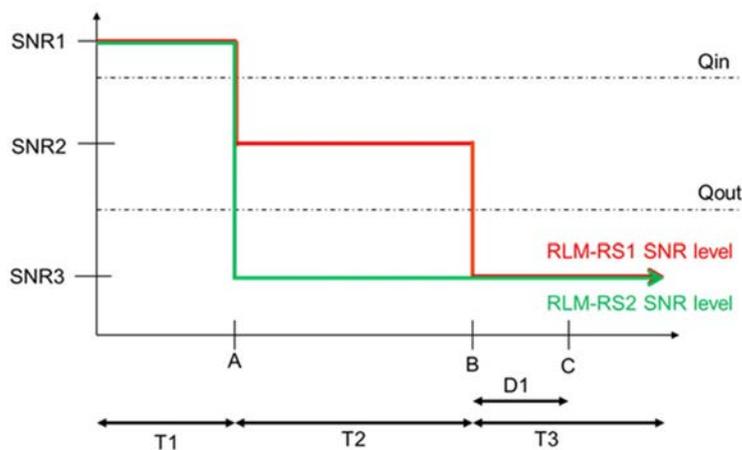


Figure A.7.5.1.7.1-1: SNR variation for CSI-RS out-of-sync testing

A.7.5.1.7.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During time durations T1, T2 and T3, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on PCell.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 (PCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 (PCell) no later than time point C (D_1 second after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.1.8 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode

A.7.5.1.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR2 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.7.5.1.8.1-1, A.7.5.1.8.1-2, A.7.5.1.8.1-3 and A.7.5.1.8.1-4 below. There is one cells, cell 1 which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.1.8.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 10 ms. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.7.5.1.8.1-1: Supported test configurations for FR2 PCell

| Configuration | Description |
|---------------|---|
| 1 | TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth |

Table A.7.5.1.8.1-2: General test parameters for FR2 PCell for CSI-RS in-sync testing in non-DRX mode

| Parameter | | Unit | Value |
|-------------------------------------|---|------|--|
| | | | Test 1 |
| Active PCell | | | Cell 1 |
| RF Channel Number | | | 1 |
| Duplex mode | Config 1 | | TDD |
| TDD Configuration | Config 1 | | TDDConf.3.1 |
| DL initial BWP configuration | Config 1 | | DLBWP.0.1 |
| DL dedicated BWP configuration | Config 1 | | DLBWP.1.1 |
| UL initial BWP configuration | Config 1 | | ULBWP.0.1 |
| UL dedicated BWP configuration | Config 1 | | ULBWP.1.1 |
| CORESET Reference Channel | Config 1 | | CCR.3.1 TDD CCR.3.3 TDD |
| SSB Configuration | Config 1 | | SSB.1 FR2 |
| SMT C Configuration | Config 1 | | SMT C.1 |
| PDSCH/PDCCH subcarrier spacing | Config 1 | | 120 KHz |
| CSI-RS for RLM | Config 1 | | Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD |
| TRS configuration | | | TRS.2.1 TDD TRS.2.2 TDD |
| TCI configuration for PDCCH#1/PDSCH | | | TCI.State.2 |
| TCI configuration for PDCCH#2 | | | TCI.State.3 |
| OCNG parameters | | | OP.1 |
| CP length | | | Normal |
| Out of sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 8 |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 4 |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 4 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| In sync transmission parameters | DCI format | | 1-0 |
| | Number of Control OFDM symbols | | 2 |
| | Aggregation level | CCE | 4 |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 |
| | DMRS precoder granularity | | REG bundle size |
| | REG bundle size | | 6 |
| DRX | | | DRX.3 |
| Gap pattern ID | | | *gp0 |
| Layer 3 filtering | | | Enabled |
| T310 timer | | ms | 2000 |
| T311 timer | | ms | 1000 |
| N310 | | | 1 |
| N311 | | | 1 |

| | | | |
|---|----------|---|----------------|
| CSI-RS for CSI reporting | Config 1 | | CSI-RS.3.1 TDD |
| T1 | | s | 0.2 |
| T2 | | s | 0.2 |
| T3 | | s | 1.64 |
| T4 | | s | 0.2 |
| T5 | | s | 1.88 |
| D1 | | s | 1.84 |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | |

Table A.7.5.1.8.1-3: Cell specific test parameters for FR2 for CSI-RS in-sync radio link monitoring in non-DRX mode

| Parameter | | Unit | Test 1 | | | | |
|---|----------|-----------|---------------------------|-----|-----|------|-----|
| | | | T1 | T2 | T3 | T4 | T5 |
| AoA setup | | dB | Setup 1 defined in A.3.15 | | | | |
| PDCCH_beta | | dB | 4 | | | | |
| PDCCH_DMRS_beta | | dB | 4 | | | | |
| PBCH_beta | | dB | 0 | | | | |
| PSS_beta | | dB | | | | | |
| SSS_beta | | dB | | | | | |
| PDSCH_beta | | dB | | | | | |
| OCNG_beta | | dB | | | | | |
| SNR on RLM-RS1 | Config 1 | dB | 2 | -6 | -15 | -4.5 | 2 |
| SNR on RLM-RS1 | Config 1 | dB | 2 | -14 | -15 | -15 | -14 |
| SNR on RLM-RS1 | Config 1 | dB | 2 | | | | |
| N_{oc} | Config 1 | dBm/15KHz | -104.7 | | | | |
| Propagation condition | | | TDL-C 300ns 100Hz | | | | |
| Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | | |
| Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | | | |
| Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | | | |
| Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1. | | | | | | | |
| Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. | | | | | | | |
| Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG. | | | | | | | |
| Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs. | | | | | | | |
| Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.7.5.1.8.1-1. | | | | | | | |
| Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6. | | | | | | | |

Table A.7.5.1.8.1-4: Measurement gap configuration for FR2 CSI-RS in-sync radio link monitoring in non-DRX mode

| Field | Test 1 |
|---|--------|
| | Value |
| gapOffset | 0 |
| Note 1: RLM RS is partially overlapped with measurement gap | |

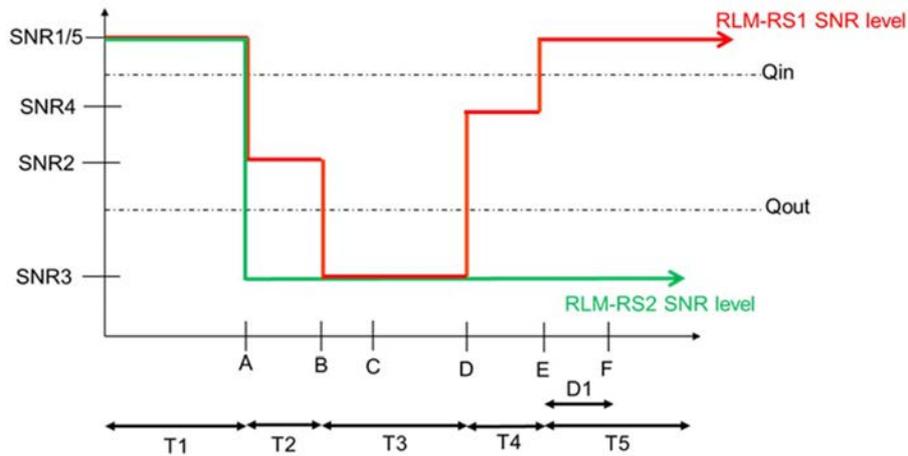


Figure A.7.5.1.8.1-1: SNR variation for CSI-RS in-sync testing

A.7.5.1.8.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.1.9 UE Radio Link Monitoring Scheduling Restrictions on FR2

A.7.5.1.9.1 Test Purpose and Environment

The purpose is to verify that the NR UE correctly follows the RLM scheduling restrictions requirements defined in clause 8.1.7. This test verifies that the UE correctly receive the PDCCH scheduled on the symbols right before the RLM SSB symbols without overlap so that it sends ACK/NACK correctly. The test case is only applicable to UE which supports pdccch-MonitoringAnyOccasions or pdccch-MonitoringAnyOccasionsWithSpanGap.

The test parameters are given in table A.7.5.1.9.1-1, table A.7.5.1.9.1-2 and table A.7.5.1.9.1-3 below. The UE is required during time period T1 to transmit ACK/NACK correctly upon scheduling of PDSCH.

Table A.7.5.1.9.1-1: Supported test configurations

| Configuration | Description |
|---------------|--|
| 1 | 120 kHz SSB SCS, 120 kHz RMC SCS, 100 MHz bandwidth, TDD duplex mode |

Table A.7.5.1.9.1-2: General test parameters for NR RLM scheduling restriction test case in FR2

| Parameter | Unit | Test configuration | Value | Comment |
|--------------------|------|--------------------|----------------|---|
| RF Channel Number | | 1 | 1 | |
| SSB configuration | | 1 | SSB.1 FR2 | |
| SMTC configuration | | 1 | SMTC pattern 1 | |
| DRX cycle length | s | 1 | OFF | |
| T1 | s | 1 | 5 | During T1 the UE is required to correctly transmit ACK/NACK |

Table A.7.5.1.9.1-3: Cell specific test parameters for NR RLM scheduling restriction test case in FR2

| Parameter | Unit | Test configuration | Cell 1 | |
|-------------------------------------|---------------|--------------------|-----------------------------|------------------|
| AoA setup | | 1 | Setup 3 defined in A.3.15.3 | |
| | | | AoA1 | AoA2 |
| TDD configuration | | 1 | TDDConf.3.1 | |
| PDSCH RMC configuration | | 1 | SR.3.1 TDD | Not sent |
| RMSI CORESET RMC configuration | | 1 | CR.3.1 TDD | Not sent |
| Dedicated CORESET RMC configuration | | 1 | CCR.3.2 TDD | Not sent |
| TRS configuration | | 1 | TRS.2.1 TDD | TRS.2.2 TDD |
| PDCCH/PDSCH TCI state | | 1 | TCI.State.2 | N/A |
| OCNG Pattern | | 1 | OP.1 defined in A.3.2.1 | Not sent |
| Initial DL BWP configuration | | 1 | DLBWP.0.1 | |
| Initial UL BWP configuration | | 1 | ULBWP.0.1 | |
| RLM-RS | | 1 | SSB with index 0 | SSB with index 1 |
| AoA setup | | 1 | Setup 3 defined in A.3.15.3 | |
| \hat{E}_s/I_{ot} | dB | 1 | 3 | N/A |
| N_{oc} ^{Note2} | dBm/SCS | 1 | -84.9 | Not sent |
| \hat{E}_s/N_{oc} | dB | 1 | 3 | N/A |
| SS-RSRP ^{Note3} | dBm/SCS | 1 | -81.9 | -81.9 |
| Io | dBm/95.04 MHz | 1 | -51.15 | -52.91 |
| Propagation Condition | | 1 | AWGN | - |

A.7.5.1.9.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.1.7.3.

A.7.5.2 Interruption

A.7.5.2.1 Interruptions during measurements on deactivated NR SCC in FR2

A.7.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE missed ACK/NACK rate does not exceed the limits at NR PSCell interruptions during the measurement on the deactivated NR SCC. This test will verify the missed ACK/NACK rate for PCell in standalone NR specified in clause 8.2.2.2. Supported test configurations are shown in table A.7.5.2.1.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.7.5.2.1.1-2 and A.7.5.2.1.1-3 below. In the test there are two cells: Cell1 and Cell2. Cell1 is PCell, Cell2 is an NR deactivated SCell. Cell1 shall be configured as PCell and Cell2 shall be configured as SCell.

The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. The point in time at which the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated NR SCells is received at the UE antenna connector, defines the start of time period T1. During T1, PCell is continuously scheduled in DL.

Table A.7.5.2.1.1-1: Interruptions during measurements on deactivated NR SCC supported test configurations

| Config | Description |
|--------|--|
| 1 | NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD – TDD duplex mode |

Table A.7.5.2.1.1-2: General test parameters for interruptions during measurements on deactivated NR SCC in standalone NR

| Parameter | Unit | Value | Comment |
|---|------|--------|--|
| RF Channel Number | | 1, 2 | Two NR RF channels |
| Active PCell | | Cell1 | PCell on NR RF channel number 1. |
| Configured deactivated SCell | | Cell2 | Deactivated SCell on NR RF channel number 2. |
| CP length | | Normal | Applicable to Cell1 and Cell2 |
| DRX | | OFF | |
| Measurement gap pattern Id | | OFF | |
| SCell measurement cycle (<i>measCycleSCell</i>) | ms | 640 | |
| T1 | s | 10 | |

Table A.7.5.2.1.1-3: NR cell specific test parameters for interruptions during measurements on deactivated NR SCC in standalone NR

| Parameter | | Unit | Cell1 | Cell2 |
|--|--|------|---------------------------------|-------|
| Frequency Range | | | FR2 | |
| Duplex mode | | | TDD | |
| TDD configuration | | | TDDConf.3.1 | |
| BW _{channel} | | | 100 MHz: N _{RB,c} = 66 | |
| Initial DL BWP Configuration | | | DLBWP.0.2 ^{Note4} | |
| Initial UL BWP Configuration | | | ULBWP.0.2 ^{Note6} | |
| Downlink dedicated BWP Configuration | | | DLBWP.1.1 | |
| Uplink dedicated BWP configuration | | | ULBWP.1.1 | |
| PDSCH Reference measurement channel | | | SR.3.1 TDD | |
| RMSI CORESET parameters | | | CR.3.1 TDD | |
| Dedicated CORESET parameters | | | CCR.3.1 TDD | |
| OCNG Patterns | | | OP.1 | |
| SMTC Configuration | | | SMTC.1 | |
| SSB Configuration | | | SSB.1 FR2 | |
| TCI State | | | TCI.State.0 | |
| TRS Configuration | | | TRS.2.1 TDD | |
| Correlation Matrix and Antenna Configuration | | | 1x2 Low | |
| EPRE ratio of PSS to SSS | | dB | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | |
| Time offset to Cell1 ^{Note 3} | | μs | - | 3 |
| Propagation Condition | | | AWGN | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Void</p> <p>Note 3: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.</p> <p>Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2 defined in clause 12 of of TS 38.213 [3].</p> | | | | |

Table A.7.5.2.1.1-4: OTA related test parameters for interruptions during measurements on deactivated NR SCC in standalone NR

| Parameter | | Unit | Cell 1 | Cell 2 |
|---|--------------|------------------------------------|------------------------------------|-------------------------------------|
| Angle of arrival configuration | | | Setup1 according to table A.3.15.1 | Setup 1 according to table A.3.15.1 |
| N_{oc} ^{Note1} | NR_TDD_FR2_A | dBm/15kHz | -112 | -112 |
| | NR_TDD_FR2_B | | | |
| | NR_TDD_FR2_F | | | |
| | NR_TDD_FR2_G | | | |
| | NR_TDD_FR2_T | | | |
| N_{oc} ^{Note1} | NR_TDD_FR2_A | dBm/SCS | -102.97 | -102.97 |
| | NR_TDD_FR2_B | | | |
| | NR_TDD_FR2_F | | | |
| | NR_TDD_FR2_G | | | |
| | NR_TDD_FR2_T | | | |
| SS-RSRP ^{Note2} | NR_TDD_FR2_A | dBm/120KHz z ^{Note3} | -85.97 | -85.97 |
| | NR_TDD_FR2_B | | | |
| | NR_TDD_FR2_F | | | |
| | NR_TDD_FR2_G | | | |
| | NR_TDD_FR2_T | | | |
| \hat{E}_s/N_{oc} | | dB | 17 | 17 |
| \hat{E}_s/I_{ot} | | dB | 17 | 17 |
| I_o ^{Note2} | NR_TDD_FR2_A | dBm/95.04 MHz ^{Note4} | -56.90 | -56.90 |
| | NR_TDD_FR2_B | | | |
| | NR_TDD_FR2_F | | | |
| | NR_TDD_FR2_G | | | |
| | NR_TDD_FR2_T | | | |
| NR_TDD_FR2_Y | | | | |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone</p> | | | | |

A.7.5.2.1.2 Test Requirements

The UE shall be continuously scheduled on PCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on PCell. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption on PCell shall not exceed the value defined in Table A.7.5.2.1.2-1 if the PCell is not in the same band as the deactivated SCell or Table A.7.5.2.1.2-2 if the PCell is in the same band as the deactivated SCell.

Table A.7.5.2.1.2-1: Interruption duration if the PCell is not in the same band as the deactivated SCell

| μ | NR Slot length (ms) | Interruption length (slot) |
|-------|---------------------|----------------------------|
| 3 | 0.125 | 4 |

Table A.7.5.2.1.2-2: Interruption duration if the PCell is in the same band as the deactivated SCell

| μ | NR Slot length (ms) | Interruption length (slot) |
|-------|---------------------|----------------------------|
| 3 | 0.125 | 4 + SMTC duration |

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.3 SCell Activation and Deactivation Delay

A.7.5.3.1 SCell Activation and deactivation for SCell in FR2 intra-band in non-DRX

A.7.5.3.1.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.6.5.3.1.1 except the PCell and SCell are in FR2 intra-band.

The supported test configurations are shown in table A.7.5.3.1.1-1 below. The general test parameters are the same as defined in Table A.6.5.3.1.1-2 except those described in Tables A.7.5.3.1.1-2, and cell specific test parameters are described in Tables A.7.5.3.1.1-3. OTA related test parameters are shown in table A.7.5.3.1.1-4 below.

Table A.7.5.3.1.1-1: Supported test configurations for FR2 SCell activation case

| Configuration | Description |
|---------------|---|
| 1 | NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode |

Table A.7.5.3.1.1-2: General test parameters for FR2 SCell activation case

| Parameter | Unit | Value | Comment |
|-------------------|------|-------|--|
| RF Channel Number | | 1,2 | Two NR radio channels are used for this test, cell 1 and cell2 use RF channel 1 and 2, respectively. |

Table A.7.5.3.1.1-3: Cell specific test parameters for FR2 SCell activation case

| Parameter ^{Note 5} | Unit | T1 | | T2 | | T3 | |
|-----------------------------|------|--------|--------|--------|--------|--------|--------|
| | | Cell 1 | Cell 2 | Cell 1 | Cell 2 | Cell 1 | Cell 2 |

| SSB ARFCN | | freq1 | freq2 | freq1 | freq2 | freq1 | freq2 |
|---|--|-----------------------------|-------|-----------------------------|-------|-----------------------------|-------|
| Duplex mode | | TDD | | TDD | | TDD | |
| TDD configuration | | TDDConf.3.1 | | TDDConf.3.1 | | TDDConf.3.1 | |
| Downlink initial BWP Configuration | | DLBWP.0.1 | | DLBWP.0.1 | | DLBWP.0.1 | |
| Downlink dedicated BWP Configuration | | DLBWP.1.1 | | DLBWP.1.1 | | DLBWP.1.1 | |
| Uplink initial BWP configuration | | ULBWP.0.1 | | ULBWP.0.1 | | ULBWP.0.1 | |
| Uplink dedicated BWP configuration | | ULBWP.1.1 | | ULBWP.1.1 | | ULBWP.1.1 | |
| TRS configuration | | TRS.2.1 TDD | | TRS.2.1 TDD | | TRS.2.1 TDD | |
| TCI state | | TCI.State.0 | | TCI.State.0 | | TCI.State.0 | |
| BW _{channel} | MHz | 100: N _{RB,c} = 66 | | 100: N _{RB,c} = 66 | | 100: N _{RB,c} = 66 | |
| PDSCH Reference measurement channel | | SR.3.1 TDD | - | SR.3.1 TDD | - | SR.3.1 TDD | - |
| RMSI CORESET Parameters | | CR.3.1 TDD | - | CR.3.1 TDD | - | CR.3.1 TDD | - |
| Dedicated CORESET Parameters | | CCR.3. 1 TDD | - | CCR.3. 1 TDD | - | CCR.3. 1 TDD | - |
| OCNG Patterns | | OP.1 | | | | | |
| SSB Configuration | | SSB.1 FR2 | | | | | |
| SMTTC Configuration | | SMTTC.1 | | | | | |
| EPRE ratio of PSS to SSS | dB | 0 | | | | | |
| EPRE ratio of PBCH_DMRS to SSS | | | | | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | | | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | | | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | | | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | | | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | | | | | |
| Propagation conditions | | AWGN | | | | | |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | | |
| Note 3: | SS-RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | | |
| Note 4: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | | | | |
| Note 5: | All parameters apply for configuration 1 and 2 | | | | | | |

Table A.7.5.3.1.1-4: OTA related test parameters for FR2 SCell activation case

| Parameter ^{Note 6} | Unit | Cell 1 | | | Cell 2 | | |
|-----------------------------|------|--------|----|----|--------|----|----|
| | | T1 | T2 | T3 | T1 | T2 | T3 |

| Angle of arrival configuration | | Setup 1 according to table A.3.15.1 | Setup 1 according to table A.3.15.1 |
|---|--------------------------------|-------------------------------------|-------------------------------------|
| N_{oc} ^{Note1} | dBm/15kHz ^{Note4} | -112 | -112 |
| N_{oc} ^{Note1} | dBm/SCS ^{Note3} | -102.97 | -102.97 |
| \hat{E}_s / N_{oc} | dB | 14 | 14 |
| SS-RSRP ^{Note2} | dBm/SCS ^{Note4} | -88.97 | -88.97 |
| \hat{E}_s / I_{ot} | dB | 14 | 14 |
| I_o ^{Note2} | dBm/95.04 MHz ^{Note4} | -88.80 | -88.80 |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone</p> <p>Note 6: All parameters apply for configuration 1 and 2</p> | | | |

A.7.5.3.1.2 Test Requirements

The test requirements defined in clause A.6.5.3.1.2 shall apply to this test case, except $T_{activation_time}$ will be replaced with the value $[T_{SMTC_SCell} + 5ms]$ as defined in clause 8.3.

A.7.5.3.2 SCell Activation and deactivation for FR1+FR2 inter-band with target SCell in FR2

A.7.5.3.2.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.7.5.3.1.1 except the PCell is in FR1 and SCell is in FR2.

The supported test configurations are the same as defined in Table A.7.5.3.2.1-1. The general test parameters are the same as defined in Table A.6.5.3.1.1-2. And cell specific test parameters are described in Tables A.7.5.3.2.1-2. OTA related test parameters are the same as defined in Table A.7.5.3.2.1-3.

Table A.7.5.3.2.1-1: Supported test configurations for FR2 SCell activation case

| Configuration | Description |
|---|---|
| 1 | PCell: 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode |
| 2 | PCell: 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode |
| 3 | PCell: 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to pass in one of the supported test configurations | |

Table A.7.5.3.2.1-2: Cell specific test parameters for FR2 SCell activation case

| Parameter ^{Note 5} | | Unit | T1 | | T2 | | T3 | |
|--|--------------|------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| | | | Cell 1 | Cell 2 | Cell 1 | Cell 2 | Cell 1 | Cell 2 |
| SSB ARFCN | | | Freq1 | Freq2 | Freq1 | Freq2 | Freq1 | Freq2 |
| Duplex mode | Config 1 | | FDD | TDD | FDD | TDD | FDD | TDD |
| | Config 2,3 | | TDD | | | | | |
| TDD configuration | Config 1 | | Not Applicable | TDDConf .3.1 | Not Applicable | TDDConf .3.1 | Not Applicable | TDDConf .3.1 |
| | Config 2,3 | | TDDConf .1.1 | | TDDConf .1.1 | | TDDConf .1.1 | |
| Downlink initial BWP Configuration | Config 1,2,3 | | DLBWP.0.1 | | | | | |
| Downlink dedicated BWP Configuration | Config 1,2,3 | | DLBWP.1 .1 | DLBWP.1.1 | DLBW P.1.1 | DLBW P.1.1 | DLBW P.1.1 | DLBW P.1.1 |
| Uplink initial BWP configuration | Config 1,2,3 | | ULBWP.0 .1 | ULBWP.0.1 | ULBW P.0.1 | ULBW P.0.1 | ULBW P.0.1 | ULBW P.0.1 |
| Uplink dedicated BWP configuration | Config 1,2,3 | | ULBWP.1 .1 | ULBWP.1.1 | ULBW P.1.1 | ULBW P.1.1 | ULBW P.1.1 | ULBW P.1.1 |
| TRS configuration | Config 1,2,3 | | N/A | TRS.2.1 TDD | N/A | TRS.2.1 TDD | N/A | TRS.2.1 TDD |
| TCI state | Config 1,2,3 | | TCI.State.0 | TCI.State.0 | TCI.State.0 | TCI.State.0 | TCI.State.0 | TCI.State.0 |
| BW _{channel} | Config 1,2 | MHz | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 |
| | Config 3 | | 40: N _{RB,c} = 106 | | 40: N _{RB,c} = 106 | | 40: N _{RB,c} = 106 | |
| PDSCH Reference measurement channel | Config 1 | | SR.1.1 FDD | - | SR.1.1 FDD | - | SR.1.1 FDD | - |
| | Config 2 | | SR.1.1 TDD | | SR.1.1 TDD | | SR.1.1 TDD | |
| | Config 3 | | SR.2.1 TDD | | SR.2.1 TDD | | SR.2.1 TDD | |
| RMSI CORESET Parameters | Config 1 | | CR.1.1 FDD | - | CR.1.1 FDD | - | CR.1.1 FDD | - |
| | Config 2 | | CR.1.1 TDD | | CR.1.1 TDD | | CR.1.1 TDD | |
| | Config 3 | | CR.2.1 TDD | | CR.2.1 TDD | | CR.2.1 TDD | |
| Dedicated CORESET Parameters | Config 1 | | CCR.1.1 FDD | - | CCR.1.1 FDD | - | CCR.1.1 FDD | - |
| | Config 2 | | CCR.1.1 TDD | | CCR.1.1 TDD | | CCR.1.1 TDD | |
| | Config 3 | | CCR.2.1 TDD | | CCR.2.1 TDD | | CCR.2.1 TDD | |
| OCNG Patterns | | | OP.1 | | | | | |
| SSB configuration | Config 1,2 | | SSB.1 FR1 | SSB.3 FR2 | SSB.1 FR1 | SSB.3 FR2 | SSB.1 FR1 | SSB.3 FR2 |
| | Config 3 | | SSB.2 FR1 | | SSB.2 FR1 | | SSB.2 FR1 | |
| SMTC configuration | | | SMTC.1 | | | | | |
| EPRE ratio of PSS to SSS | | dB | 0 | | | | | |
| EPRE ratio of PBCH_DMRS to SSS | | | | | | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | | | | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | | | | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | | | | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | | | | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | | | | | |

| | | | | | | | |
|--|--|---------------------------------|------|---------------------------------|------|---------------------------------|------|
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | | | | | |
| Propagation conditions | | NA Link only, see clause A.3.7A | AWGN | NA Link only, see clause A.3.7A | AWGN | NA Link only, see clause A.3.7A | AWGN |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 5: All parameters apply for configuration 1 and 2</p> | | | | | | | |

Table A.5.5.3.2.1-3: OTA related test parameters for FR1 PCell activation case with FR2 SCell

| Parameter | Unit | Cell 2 | | | Cell 1 | | |
|--------------------------------|------------|------------------------------|----|----|------------------------------------|----|----|
| | | T1 | T2 | T3 | T1 | T2 | T3 |
| Angle of arrival configuration | | According to clause A.3.15.1 | | | NA | | |
| N_{oc} ^{Note1} | dBm/15kHz | -112 | | | NA Link only, see clause A.3.7A | | |
| N_{oc} ^{Note1} | Config 1,2 | -102.97 | | | | | |
| | Config 3, | | | | | | |
| SS-RSRP ^{Note2} | Config 1,2 | -85.97 | | | | | |
| | Config 3 | | | | | | |
| \hat{E}_s / N_{oc} | dB | 17 | | | | | |
| \hat{E}_s / I_{ot} | dB | 17 | | | | | |
| I_o ^{Note2} | Config 1,2 | -56.90 | | | | | |
| | Config 3 | | | | | | |

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone

Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone

Note 6: ChBW is 94.04 MHz for Cell2, 9.36 MHz for Cell 3 in configurations 1,2,4,5, 38.1 MHz in configurations 3,6

A.7.5.3.2.2 Test Requirements

The test requirements defined in clause A.7.5.3.1.2 shall apply to this test case, except $T_{activation_time}$ will be replaced with the value [TBD] as defined in clause 8.3.

A.7.5.4 Viod

A.7.5.5 Beam Failure Detection and Link recovery procedures

A.7.5.5.1 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode

A.7.5.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.7.5.5.1.1-1, A.7.5.5.1.1-2, A.7.5.5.1.1-3 and A.7.5.5.1.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.1.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.7.5.5.1.1-1 additionally shows the variation of the downlink SNR of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

Table A.7.5.5.1.1-1: Supported test configurations for FR2 PCell

| Configuration | Description |
|---------------|--|
| 1 | TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth |
| 2 | TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth |
| Note: | The UE is only required to pass in one of the supported test configurations in FR2 |

Table A.7.5.5.1.1-2: General test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

| Parameter | Unit | Value | Comment |
|--------------------------------|-------------|-----------------------------|---------|
| | | Test 1 | |
| Active PCell | | Cell 1 | |
| RF Channel Number | | 1 | |
| Duplex mode | Config 1, 2 | TDD | |
| BW _{channel} | Config 1, 2 | 100: N _{RB,c} = 66 | |
| DL initial BWP configuration | Config 1, 2 | DLBWP.0.1 | |
| DL dedicated BWP configuration | Config 1, 2 | DLBWP.1.1 | |
| UL initial BWP configuration | Config 1, 2 | ULBWP.0.1 | |
| UL dedicated BWP configuration | Config 1, 2 | ULBWP.1.1 | |
| TDD Configuration | Config 1, 2 | TDDConf.3.1 | |
| CORESET Reference Channel | Config 1, 2 | CR. 3.1 TDD | |

| | | | | |
|--|---|-----|-----------------|--|
| SSB Configuration | Config 1 | | SSB.1 FR2 | |
| | Config 2 | | SSB.2 FR2 | |
| SMTC Configuration | Config 1, 2 | | SMTC.3 | |
| PDSCH/PDCCH subcarrier spacing | Config 1, 2 | | 120 KHz | |
| PRACH Configuration | Config 1, 2 | | Table A.3.8.3.4 | |
| SSB index assigned as BFD RS (q_0) | | | 0 | |
| SSB index assigned as CBD RS (q_1) | | | 1 | |
| TCI Configuration | Config 1, 2 | | TBD | |
| OCNG parameters | | | OP.1 | |
| CP length | | | Normal | |
| Beam failure detection transmission parameters | DCI format | | 1-0 | |
| | Number of Control OFDM symbols | | 2 | |
| | Aggregation level | CCE | 8 | |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 | |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 | |
| | DMRS precoder granularity | | REG bundle size | |
| REG bundle size | | | 6 | |
| DRX | | | OFF | |
| Gap pattern ID | | | gp0 | |
| rInSyncOutOfSyncThreshold | | | absent | When the field is absent, the UE applies the value 0. (Table 8.1.1-1). |
| rsrp-ThresholdSSB | dBm | | TBD | Threshold used for $Q_{in_LR_SSB}$ |
| powerControlOffsetSS | | | db0 | Used for deriving rsrp-ThresholdCSI-RS |
| beamFailureInstanceMaxCount | | | n1 | see clause 5.17 of TS 38.321 [7] |
| beamFailureDetectionTimer | | | pbfd4 | see clause 5.17 of TS 38.321 [7] |

| | | | | |
|---|-------------|----|----------------|---|
| CSI-RS configuration for CSI reporting | Config 1, 2 | | CSI-RS.3.1 TDD | |
| TCI states | | | [TCI.State.0] | TCI.State.0 |
| CSI-RS for tracking | Config 1, 2 | | TRS.2.1 TDD | |
| SSB index assigned as RLM RS | | | 0, 1 | |
| T310 Timer | | ms | 1000 | |
| N310 | | | 2 | |
| T1 | | s | 1 | During this time the the UE shall be fully synchronized to cell 1 |
| T2 | | s | 2.61 | |
| T3 | | s | 1.64 | |
| T4 | | s | 0 | |
| T5 | | s | 1.01 | |
| D1 | | s | 0.97 | |
| Note 1: All configurations are assigned to the UE prior to the start of time period T1. | | | | |
| Note 2: UE-specific PDCCH is not transmitted after T1 starts. | | | | |

Editor's note: An additional RS for RLM, different from BFD-RS at constant high SNR shall be configured as part of the test configuration.

Table A.7.5.5.1.1-3: Cell specific test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

| Parameter | Unit | Test 1 | | | | |
|-----------------------------------|----------|---------------------------|-----|-----|-----|-----|
| | | T1 | T2 | T3 | T4 | T5 |
| AoA setup | | Setup 1 defined in A.3.15 | | | | |
| EPRE ratio of PDCCH DMRS to SSS | dB | 0 | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | dB | | | | | |
| EPRE ratio of PBCH DMRS to SSS | dB | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | dB | | | | | |
| EPRE ratio of PSS to SSS | dB | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | dB | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | dB | | | | | |
| EPRE ratio of OCNG DMRS to SSS | dB | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | dB | | | | | |
| SNR_SSB of set q_0 | Config 1 | 5 | -3 | -12 | -12 | -12 |
| | Config 2 | 5 | -3 | -12 | -12 | -12 |
| SNR_SSB of set q_1 | Config 1 | -12 | -12 | 5 | 5 | 5 |
| | Config 2 | -12 | -12 | 5 | 5 | 5 |
| N_{oc} | Config 1 | TBD | | | | |
| | Config 2 | TBD | | | | |

| | |
|-----------------------|---|
| Propagation condition | TDL-A 30ns 75Hz |
| Note 1: | OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
| Note 2: | The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. |
| Note 3: | NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. |
| Note 4: | Measurement gap configuration is assigned to the UE prior to the start of time period T1. |
| Note 5: | The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. |
| Note 6: | The signal contains PDCCH for UEs other than the device under test as part of OCNG. |
| Note 7: | SNR levels correspond to the signal to noise ratio over the SSS REs. |
| Note 8: | The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.1.1-1. |
| Note 9: | The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6. |

Table A.7.5.5.1.1-4: Void

| Field | Test 1 Value |
|-----------|--------------|
| gapOffset | 0 |

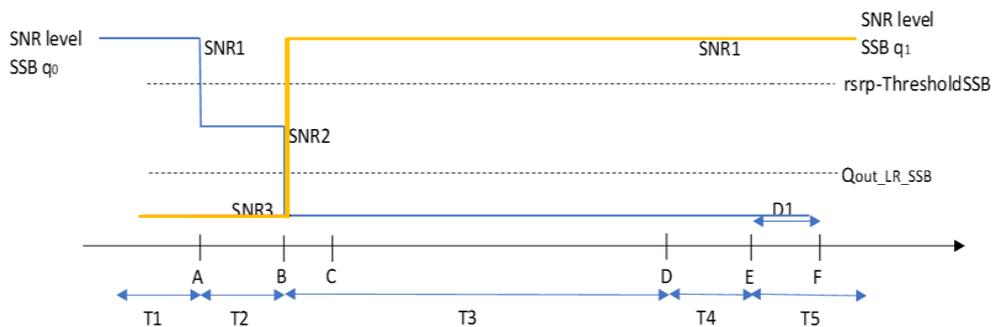


Figure A.7.5.5.1.1-1: SNR variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.7.5.5.1.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q₁.

No later than time point F occurring no later than D1 = 960+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q₁. The UE shall not transmit preamble on a beam associated with the candidate beam set q₁ earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in DRX mode

A.7.5.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.7.5.5.2.1-1, A.7.5.5.2.1-2, A.7.5.5.2.1-3, A.7.5.5.2.1-4 and A.7.5.5.2.1-5 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.2.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.7.5.5.2.1-1 additionally shows the variation of the downlink SNR of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.7.5.5.2.1-1: Supported test configurations for FR2 PCell

| Configuration | Description |
|---------------|--|
| 1 | TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth |
| 2 | TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth |
| Note: | The UE is only required to pass in one of the supported test configurations in FR2 |

Table A.7.5.5.2.1-2: General test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

| Parameter | Unit | Value | Comment |
|--------------------------------|-------------|-----------------------------|---------|
| | | Test 1 | |
| Active PCell | | Cell 1 | |
| RF Channel Number | | 1 | |
| Duplex mode | Config 1, 2 | TDD | |
| BW _{channel} | Config 1, 2 | 100: N _{RB,c} = 66 | |
| DL initial BWP configuration | Config 1, 2 | DLBWP.0.1 | |
| DL dedicated BWP configuration | Config 1, 2 | DLBWP.1.1 | |
| UL initial BWP configuration | Config 1, 2 | ULBWP.0.1 | |
| UL dedicated BWP configuration | Config 1, 2 | ULBWP.1.1 | |
| TDD Configuration | Config 1, 2 | TDDConf.3.1 | |
| CORESET Reference Channel | Config 1, 2 | CR. 3.1 TDD | |
| SSB Configuration | Config 1 | SSB.1 FR2 | |
| | Config 2 | SSB.2 FR2 | |
| SMTTC Configuration | Config 1, 2 | SMTTC.3 | |

| | | | | |
|--|---|-----|-----------------|--|
| PDSCH/PDCCH subcarrier spacing | Config 1, 2 | | 120 KHz | |
| PRACH Configuration | Config 1, 2 | | Table A.3.8.3.4 | |
| SSB index assigned as BFD RS (q_0) | | | 0 | |
| SSB index assigned as CBD RS (q_1) | | | 1 | |
| TCI Configuration | Config 1, 2 | | TBD | |
| OCNG parameters | | | OP.1 | |
| CP length | | | Normal | |
| Beam failure detection transmission parameters | DCI format | | 1-0 | |
| | Number of Control OFDM symbols | | 2 | |
| | Aggregation level | CCE | 8 | |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 | |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 | |
| | DMRS precoder granularity | | REG bundle size | |
| | REG bundle size | | 6 | |
| DRX | | | DRX.3 | A.3.3.3 |
| Gap pattern ID | | | N.A. | |
| rimInSyncOutOfSyncThreshold | | | absent | When the field is absent, the UE applies the value 0. (Table 8.1.1-1). |
| rsrp-ThresholdSSB | | dBm | TBD | Threshold used for $Q_{in_LR_SSB}$ |
| powerControlOffsetSS | | | db0 | Used for deriving rsrp-ThresholdCSI-RS |
| beamFailureInstanceMaxCount | | | n1 | see clause 5.17 of TS 38.321 [7] |
| beamFailureDetectionTimer | | | pbfd4 | see clause 5.17 of TS 38.321 [7] |
| CSI-RS configuration for CSI reporting | Config 1, 2 | | CSI-RS.3.1 TDD | A.3.14.2 |
| TCI states | | | [TCI.State.0] | TCI.State.0 |
| CSI-RS for tracking | Config 1, 2 | | TRS.2.1 TDD | |
| SSB index assigned as RLM RS | | | 0, 1 | |
| T310 Timer | | ms | 1000 | |
| N310 | | | 2 | |
| T1 | | s | 1 | During this time the the UE shall be fully synchronized to cell 1 |
| T2 | | s | 3.37 | |
| T3 | | s | 2.8 | |
| T4 | | s | 0 | |

| | | | |
|---|---|------|--|
| T5 | s | 0.61 | |
| D1 | s | 0.57 | |
| Note 1: All configurations are assigned to the UE prior to the start of time period T1. | | | |
| Note 2: UE-specific PDCCH is not transmitted after T1 starts. | | | |

Table A.7.5.5.2.1-3: Cell specific test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

| Parameter | Unit | Test 1 | | | | | |
|---|----------|---------------------------|-----|-----|-----|-----|-----|
| | | T1 | T2 | T3 | T4 | T5 | |
| AoA setup | | Setup 1 defined in A.3.15 | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | dB | 0 | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | dB | | | | | | |
| EPRE ratio of PBCH DMRS to SSS | dB | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | dB | | | | | | |
| EPRE ratio of PSS to SSS | dB | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | dB | | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | dB | | | | | | |
| EPRE ratio of OCNG DMRS to SSS | dB | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | dB | | | | | | |
| SNR_SSB of set q_0 | Config 1 | dB | 5 | -3 | -12 | -12 | -12 |
| | Config 2 | | 5 | -3 | -12 | -12 | -12 |
| SNR_SSB of set q_1 | Config 1 | dB | -12 | -12 | -12 | -3 | 10 |
| | Config 2 | | -12 | -12 | -12 | -3 | 10 |
| SNR_CSI-RS of RLM-RS | Config 1 | dB | 5 | 5 | 5 | 5 | 5 |
| | Config 2 | | 5 | 5 | 5 | 5 | 5 |
| N_{oc} | Config 1 | dBm/12 | TBD | | | | |
| | Config 2 | 0 KHz | TBD | | | | |
| Propagation condition | | TDL-A 30ns 75Hz | | | | | |
| Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | | |
| Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | | | |
| Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | | | |
| Note 4: Void | | | | | | | |
| Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. | | | | | | | |
| Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG. | | | | | | | |
| Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs. | | | | | | | |
| Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.1.1-1. | | | | | | | |
| Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6. | | | | | | | |

Table A.7.5.5.2.1-4: Void

| Field | Test 2 |
|-----------|--------|
| | Value |
| gapOffset | 0 |

Table A.7.5.5.2.1-5: Void

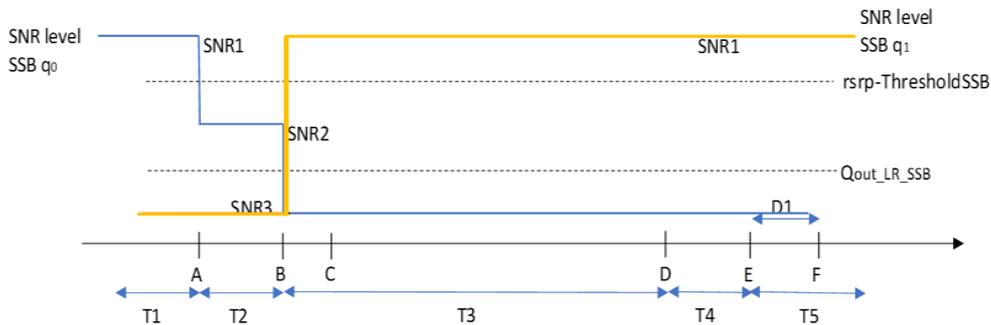


Figure A.7.5.5.2.1-1: SNR variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.7.5.5.2.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 560 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.3 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in non-DRX mode

A.7.5.5.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.7.5.5.3.1-1, A.7.5.5.3.1-2, and A.7.5.5.3.1-3 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.3.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.7.5.5.3.1-1 additionally shows the variation of the downlink SNR of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. In the test, DRX configuration is not enabled.

Table A.7.5.5.3.1-1: Supported test configurations for FR2 PCell

| Configuration | Description |
|----------------------|---|
| 1 | TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth |

Table A.7.5.5.3.1-2: General test parameters for FR2 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

| Parameter | | Unit | Value Test 1 | Comment |
|--|---|------|-----------------|---|
| Active PCell | | | Cell 1 | |
| RF Channel Number | | | 1 | |
| Duplex mode | Config 1 | | TDD | |
| TDD Configuration | Config 1 | | TDDConf.3.1 | |
| CORESET Reference Channel | Config 1 | | CR.3.1 TDD | A.3.1.2 |
| SSB Configuration | Config 1 | | SSB.3 FR2 | A.3.10 |
| SMTC Configuration | Config 1 | | SMTC.3 | A.3.11 |
| PDSCH/PDCCH subcarrier spacing | Config 1 | | 120KHz | |
| csi-RS-Index assigned as beam failure detection RS in set q_0 | | | 0 | |
| TRS configuration | | | TRS.2.1 TDD | |
| TCI configuration | | | CSI-RS.Config.0 | |
| OCNG parameters | | | OP.1 | A.3.2.1 |
| CP length | | | Normal | |
| Beam failure detection transmission parameters | DCI format | | 1-0 | |
| | Number of Control OFDM symbols | | 2 | |
| | Aggregation level | CCE | 8 | |
| | Ratio of hypothetical PDCCH RE energy to average CSI- RS RE energy | dB | 0 | |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 | |
| | DMRS precoder granularity | | REG bundle size | |
| | REG bundle size | | 6 | |
| DRX | | | OFF | |
| Gap pattern ID | | | N.A. | |
| csi-RS-Index assigned as candidate beam detection RS in set q_1 | | | 1 | |
| rInSyncOutOfSyncThreshold | | | absent | When the field is absent, the UE applies the value 0. (Table 8.1.1-1). |
| rsrp-ThresholdSSB | | dBm | TBD | Threshold used for $Q_{in_LR_SSB}$ |
| powerControlOffsetSS | | | NA | Used for deriving rsrp- ThresholdCSI-RS |
| beamFailureInstanceMaxCount | | | n1 | see clause 5.17 of TS 38.321 [7] |

| | | | | |
|---|----------|----|----------------|---|
| beamFailureDetectionTimer | | | pbfd4 | see clause 5.17 of TS 38.321 [7] |
| CSI-RS configuration for q_0 and q_1 | Config 1 | | CSI-RS.3.2 TDD | A.3.14.2 |
| CSI-RS configuration for CSI reporting | Config 1 | | CSI-RS.3.1 TDD | A.3.14.2 |
| csi-RS-Index assigned as RLM RS | | | 0, 1 | A.3.14.2 |
| T310 Timer | | ms | 1000 | |
| N310 | | | 2 | |
| T1 | | s | 1 | During this time the UE shall be fully synchronized to cell 1 |
| T2 | | s | 1.17 | |
| T3 | | s | 0.9 | |
| T4 | | s | 0 | |
| T5 | | s | 0.31 | |
| D1 | | s | 0.27 | |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | | |

Table A.7.5.3.1-3: Cell specific test parameters for FR2 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

| Parameter | | Unit | Test 1 | | | | |
|---|----------|------------|---------------------------|-----|-----|-----|-----|
| | | | T1 | T2 | T3 | T4 | T5 |
| AoA setup | | | Setup 1 defined in A.3.15 | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | dB | 0 | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | dB | | | | | |
| EPRE ratio of PBCH DMRS to SSS | | dB | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | dB | | | | | |
| EPRE ratio of PSS to SSS | | dB | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | dB | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | dB | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | dB | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | dB | | | | | |
| SNR_CSI-RS of set q_0 | Config 1 | dB | 5 | -3 | -12 | -12 | -12 |
| SNR_CSI-RS of set q_1 | Config 1 | dB | -12 | -12 | 5 | 5 | 5 |
| N_{oc} | Config 1 | dBm/15 KHz | TBD | | | | |
| Propagation condition | | | TDL-A 30ns 75Hz | | | | |
| <p>Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.</p> <p>Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.</p> <p>Note 4: Void</p> <p>Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.</p> <p>Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.</p> <p>Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.</p> <p>Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.3.1-1.</p> <p>Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.</p> | | | | | | | |

Table A.7.5.5.3.1-4: Void

Table A.7.5.5.3.1-5: Void

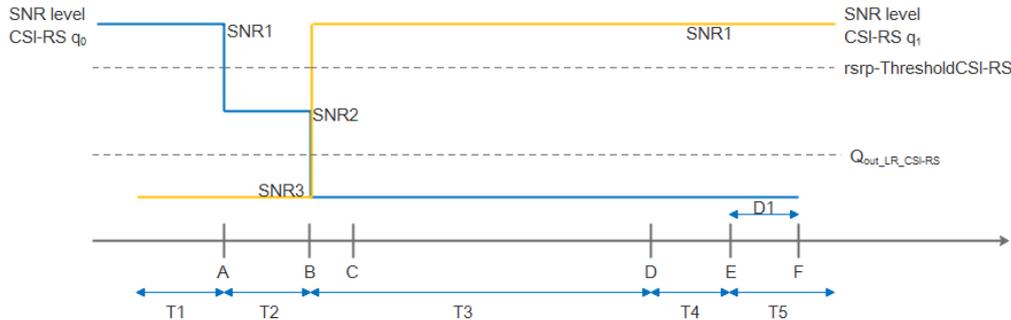


Figure A.7.5.5.3.1-1: SNR variation for CSI-RS based beam failure detection and link recovery testing in non-DRX mode

A.7.5.5.3.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 260 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.4 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in DRX mode

A.7.5.5.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.7.5.5.4.1-1, A.7.5.5.4.1-2, A.7.5.5.4.1-3, and A.7.5.5.4.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.4.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.7.5.5.4.1-1 additionally shows the variation of the downlink SNR of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period

when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.7.5.5.4.1-1: Supported test configurations for FR2 PCell

| Configuration | Description |
|----------------------|---|
| 1 | TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth |

Table A.4.5.1.1.1-2: General test parameters for FR2 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

| Parameter | | Unit | Value Test 1 | Comment |
|---|---|------|-----------------|--|
| Active PCell | | | Cell 1 | |
| RF Channel Number | | | 1 | |
| Duplex mode | Config 1 | | TDD | |
| TDD Configuration | Config 1 | | TDDConf.3.1 | |
| CORESET Reference Channel | Config 1 | | CR.3.1 TDD | A.3.1.2 |
| SSB Configuration | Config 1 | | SSB.3 FR2 | A.3.10 |
| SMTC Configuration | Config 1 | | SMTC.3 | A.3.11 |
| PDSCH/PDCCH subcarrier spacing | Config 1 | | 120 KHz | |
| csi-RS-Index assigned as beam failure detection RS in set q_0 | | | 0 | |
| TRS configuration | | | TRS.2.1 TDD | |
| TCI configuration | | | CSI-RS.Config.0 | |
| OCNG parameters | | | OP.1 | A.3.2.1 |
| CP length | | | Normal | |
| Beam failure detection transmission parameters | DCI format | | 1-0 | |
| | Number of Control OFDM symbols | | 2 | |
| | Aggregation level | CCE | 8 | |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 | |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 | |
| | DMRS precoder granularity | | REG bundle size | |
| | REG bundle size | | 6 | |
| DRX | | | DRX.3 | A.3.3.3 |
| Gap pattern ID | | | N.A. | |
| csi-RS-Index assigned as candidate beam detection RS in set q_1 | | | 1 | |
| rInSyncOutOfSyncThreshold | | | absent | When the field is absent, the UE applies the value 0. (Table 8.1.1-1). |
| rsrp-ThresholdSSB | | dBm | TBD | Threshold used for $Q_{in_LR_SSB}$ |
| powerControlOffsetSS | | | db0 | Used for deriving rsrp-ThresholdCSI-RS |
| beamFailureInstanceMaxCount | | | n1 | see clause 5.17 of TS 38.321 [7] |

| | | | | |
|---|----------|----|----------------|---|
| beamFailureDetectionTimer | | | pbfd4 | see clause 5.17 of TS 38.321 [7] |
| CSI-RS configuration for q_0 and q_1 | Config 1 | | CSI-RS.3.2 TDD | A.3.14.2 |
| CSI-RS configuration for CSI reporting | Config 1 | | CSI-RS.3.1 TDD | A.3.14.2 |
| csi-RS-Index assigned as RLM RS | Config 1 | | CSI-RS.3.2 TDD | A.3.14.2 |
| T310 Timer | | ms | 1000 | |
| N310 | | | 2 | |
| T1 | | s | 1 | During this time the the UE shall be fully synchronized to cell 1 |
| T2 | | s | 5.43 | |
| T3 | | s | 5.16 | |
| T4 | | s | 0 | |
| T5 | | s | 0.31 | |
| D1 | | s | 0.27 | |
| Note 1: UE-specific PDCCH is not transmitted after T1 starts. | | | | |

Table A.7.5.4.1-3: Cell specific test parameters for FR2 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

| Parameter | | Unit | Test 1 | | | | |
|-----------------------------------|----------|------|---------------------------|-----|-----|-----|-----|
| | | | T1 | T2 | T3 | T4 | T5 |
| AoA setup | | | Setup 1 defined in A.3.15 | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | dB | 0 | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | |
| EPRE ratio of PSS to SSS | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | | | | | | |
| SNR_CSI-RS of set q_0 | Config 1 | dB | 5 | -3 | -12 | -12 | -12 |
| SNR_CSI-RS of set q_1 | Config 1 | | -12 | -12 | 5 | 5 | 5 |

| | | | |
|---|----------|-----------------|-----|
| N_{oc} | Config 1 | dBm/12 0 KHz | TBD |
| Propagation condition | | TDL-A 30ns 75Hz | |
| <p>Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.</p> <p>Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.</p> <p>Note 4: Void</p> <p>Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.</p> <p>Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.</p> <p>Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.</p> <p>Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.4.1-1.</p> <p>Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.</p> | | | |

Table A.7.5.5.4.1-4: Void

Table A.7.5.5.4.1-5: Void

Table A.7.5.5.4.1-6: Void

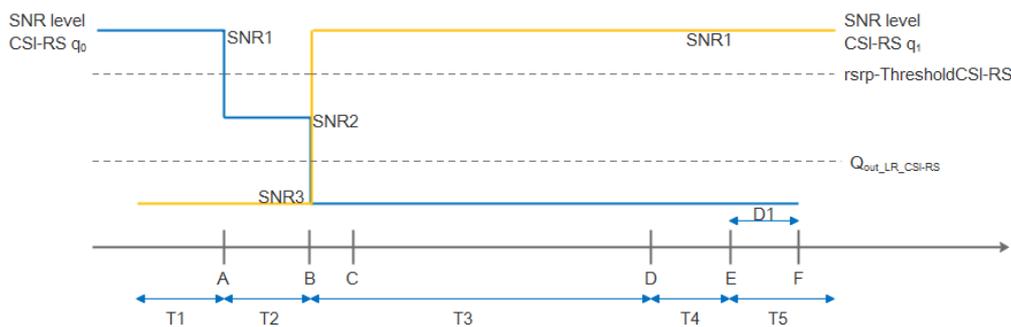


Figure A.7.5.5.4.1-1: SNR variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

A.7.5.5.4.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 260+10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.5 Scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode

A.7.5.5.5.1 Test Purpose and Environment

The purpose is to test scheduling availability restrictions when the UE is performing beam failure detection or when the UE is performing L1-RSRP measurement for candidate beam detection, when no DRX is used. This test will verify the scheduling availability restriction requirements in clause 8.5.7 and 8.5.8.

The test parameters are given in Tables A.7.5.5.5.1-1, A.7.5.5.5.1-2 and A.7.5.5.5.1-3 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.5.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.7.5.5.5.1-1 additionally shows the variation of the downlink SNR of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. This test will focus on the scheduling availability during beam failure detection) and candidate beam detection. In the test, DRX configuration is not enabled. Test is to test the scheduling availability restriction of UE performing beam failure detection and candidate beam detection when SSB RS configured for Beam failure detection and candidate beam detection. During the test the UE is scheduled to transmit continuously in UL.

Table A.7.5.5.1-1: Supported test configurations for FR2 PCell

| Configuration | Description |
|----------------------|--|
| 1 | NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.7.5.5.1-2: General test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

| Parameter | | Unit | Value Test 1 | Comment |
|--|---|------|-----------------|---|
| Active PCell | | | Cell 1 | |
| RF Channel Number | | | 1 | |
| Duplex mode | Config 1 | | TDD | |
| TDD Configuration | Config 1 | | TDDConf.3.1 | |
| DL initial BWP configuration | Config 1 | | DLBWP.0.1 | |
| DL dedicated BWP configuration | Config 1 | | DLBWP.1.1 | |
| UL initial BWP configuration | Config 1 | | ULBWP.0.1 | |
| UL dedicated BWP configuration | Config 1 | | ULBWP.1.1 | |
| CORESET Reference Channel | Config 1 | | CR. 3.1 TDD | |
| SSB Configuration | Config 1 | | SSB.1 FR2 | |
| SMTTC Configuration | Config 1 | | SMTTC.1 | |
| PDSCH/PDCCH subcarrier spacing | Config 1 | | 120 KHz | |
| SSB index assigned as BFD RS (q_0) | | | 0 | |
| SSB index assigned as CBD RS (q_1) | | | 1 | |
| TRS configuration | | | TRS.2.1 TDD | |
| TCI configuration | | | TCI.State.0 | |
| OCNG parameters | | | OP.1 | |
| AoA Setup | | | Setup 1 | A.3.15.1 |
| CP length | | | Normal | |
| Beam failure detection transmission parameters | DCI format | | 1-0 | |
| | Number of Control OFDM symbols | | 2 | |
| | Aggregation level | CCE | 8 | |
| | Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy | dB | 0 | |
| | Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy | dB | 0 | |
| | DMRS precoder granularity | | REG bundle size | |
| | REG bundle size | | 6 | |
| DRX | | | OFF | DRX is not in use |
| Gap pattern ID | | | N.A. | No measurement gap pattern is configured |
| ssb-Index | | | 2 | Number of SSB indexes used for beam failure detection |
| rlmInSyncOutOfSyncThreshold | | | absent | When the field is absent, the UE applies the 10% |
| rsrp-ThresholdSSB | | dBm | -94.5 | Threshold used for $Q_{in_LR_SSB}$ |
| powerControlOffsetSS | | | db0 | Used for deriving rsrp-ThresholdCSI-RS |
| beamFailureInstanceMaxCount | | | n2 | see TS 38.321 [7], clause 5.17 |
| beamFailureDetectionTimer | | | pbfd4 | see TS 38.321 [7], clause 5.17 |

| | | | | |
|---|----------|----|----------------|---|
| CSI Configuration for reporting | Config 1 | | CSI-RS.3.1 TDD | A.3.14.2 |
| T310 Timer | | ms | 1000 | |
| N310 | | | 2 | |
| T1 | | s | 1 | During this time the the UE shall be fully synchronized to cell 1 |
| T2 | | s | 2.6 | |
| T3 | | s | 1.64 | |
| T4 | | s | 0 | |
| T5 | | s | 1.01 | |
| D1 | | s | 0.97 | |
| Note 1: All configurations are assigned to the UE prior to the start of time period T1. | | | | |
| Note 2: UE-specific PDCCH is not transmitted after T1 starts. | | | | |

Table A.7.5.5.1-3: Cell specific test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

| Parameter | Unit | Test 1 | | | | |
|---|----------|-----------------|-----|-----|-----|-----|
| | | T1 | T2 | T3 | T4 | T5 |
| EPRE ratio of PDCCH DMRS to SSS | dB | 0 | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PSS to SSS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | | | | | |
| SNR_SSB of set q_0 | | | | | | |
| | Config 2 | 5 | -3 | -12 | -12 | -12 |
| SNR_SSB of set q_1 | Config 1 | -12 | -12 | 5 | 5 | 5 |
| | Config 2 | -12 | -12 | 5 | 5 | 5 |
| N_{oc} | Config 1 | -104.7 | | | | |
| | Config 2 | -104.7 | | | | |
| Propagation condition | | TDL-A 30ns 75Hz | | | | |
| Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | |
| Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | | |
| Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. | | | | | | |
| Note 4: Void | | | | | | |
| Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. | | | | | | |
| Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG. | | | | | | |
| Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs. | | | | | | |
| Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.1-1. | | | | | | |
| Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6. | | | | | | |

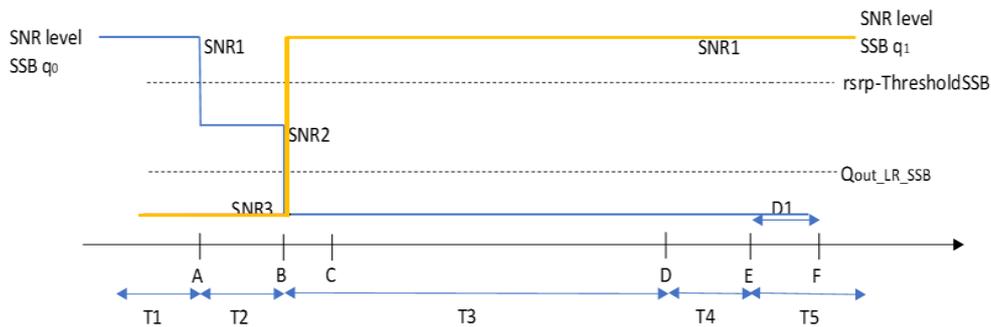


Figure A.7.5.5.1-1: SNR variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.7.5.5.2 Test Requirements

The UE behaviour during time duration T3 follows the requirements defined in clause 8.5.7.3:

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on BFD-RS symbols to be measured for beam failure detection.

The UE behaviour during time durations T4 and T5 follows the requirements defined in clause 8.5.8.3:

- The UE is not expected to transmit PUCCH/PUSCH or receive PDCCH/PDSCH on reference symbols to be measured for candidate beam detection.

A.7.5.6 Active BWP switch

A.7.5.6.1 DCI-based and Timer-based Active BWP Switch

A.7.5.6.1.1 NR FR2- NR FR2 DL active BWP switch of PCell with non-DRX in SA

A.7.5.6.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6, and interruption requirement on other active serving cell defined in clause 8.2.2.2.5.

The supported test configurations are shown in Table A.7.5.6.1.1.1-1 below. The test scenario comprises of one NR PCell (Cell 1) and one NR SCell (Cell 2) as given in Table A.7.5.6.1.1.1-2. NR Cell-specific parameters are specified in Table A.7.5.6.1.1.1-3 below. OTA related test parameters are shown in table A.7.5.6.1.1.1-4 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 1 and the time duration of T2.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 2) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (SCell) on radio channel 2 (SCC).

UE is configured with 2 different UE-specific downlink bandwidth parts for PCell, BWP-1 and BWP-2, in Cell 1 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.

UE is indicated in firstActiveDownlinkBWP-Id that the active DL BWP is BWP-1 in PCell.

UE is configured with a bwp-InactivityTimer timer value for PCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for PCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted i . The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH no later than at the beginning of the DL slot right after PCell's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PCell no later than at the beginning of the DL slot right after slot ($i+T_{BWPswitchDelay}+kI$). The UE shall be continuously scheduled on PCell's BWP-2 no later than at the beginning of the DL slot right after slot ($i+T_{BWPswitchDelay}$).

The starting time of SCell (Cell 2) interruption due to BWP switch on PCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on PCell(Cell 1).

During T3,

The time period T3 starts from the slot # j , where j is the beginning slot of the DL subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH no later than at the beginning of the DL slot right after PCell's DL slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PCell at latest at the beginning of the DL slot right after slot ($j+T_{BWPswitchDelay}+kI$). The UE shall be continuously scheduled on PCell's BWP-1 no later than the beginning of the DL slot right after slot ($j+T_{BWPswitchDelay}$).

The starting time of SCell (Cell 2) interruption due to BWP switch of PCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in PCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

The test equipment verifies that potential interruption to SCell is carried out in the correct time span by monitoring ACK/NACK sent in SCell during BWP switch of PCell, respectively.

Table A.7.5.6.1.1.1-1: DL BWP switch supported test configurations

| Config | Description |
|--------|---|
| 1 | NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD -TDD duplex mode |

Table A.7.5.6.1.1.1-2: General test parameters for DL BWP switch in SA

| Parameter | Unit | Value | Comment |
|---|---------|--------|---|
| NR RF Channel Number | | 1, 2 | Two NR radio channels are used for this test |
| Active PCell | | Cell 1 | PCell on RF channel number 1. |
| Active SCell | | Cell 2 | SCell on RF channel number 2. |
| CP length | | Normal | |
| DRX | | OFF | For both PCell and PSCell |
| <i>bwp-InactivityTimer</i> | ms | 200 | |
| Cell-individual offset for cells on RF channel number 1 | dB | 0 | Individual offset for cells on PCC. |
| Cell-individual offset for cells on RF channel number 2 | dB | 0 | Individual offset for cells on PSCC. |
| Cell2 timing offset to cell1 | μ s | 3 | Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1. |
| T1 | s | 0.2 | |
| T2 | s | 0.2 | |
| T3 | s | 0.2 | |

Table A7.5.6.1.1.1-3: NR Cell specific test parameters for DL BWP switch in SA

| Parameter | Unit | Cell 1 | Cell2 |
|---|------|---------------------------------|-------|
| Frequency Range | | FR2 | FR2 |
| Duplex mode | | TDD | |
| TDD configuration | | TDDConf.3.1 | |
| BW _{channel} | | 100 MHz: N _{RB,c} = 66 | |
| Active BWP ID | | 1, 2 | 3 |
| Downlink initial BWP Configuration | | DLBWP.0.2 | |
| Uplink initial BWP Configuration | | ULBWP.0.2 | |
| Downlink active BWP-1 Configuration | | DLBWP.1.3 | - |
| Downlink active BWP-2 Configuration | | DLBWP.1.3 | - |
| Uplink active BWP-1 Configuration | | ULBWP.1.3 | - |
| Uplink active BWP-2 Configuration | | ULBWP.1.3 | - |
| PDSCH Reference measurement channel | | SR.3.1 TDD | |
| TRS configuration | | TRS.2.1 TDD | |
| TCI state | | TCI.State.0 | |
| RMSI CORESET parameters | | CR.3.1 TDD | |
| Dedicated CORESET parameters | | CCR.3.1 TDD | |
| OCNG Patterns | | OP.1 | |
| SSB Configuration | | SSB.1 FR2 | |
| SMTC Configuration | | SMTC.1 | |
| Correlation Matrix and Antenna Configuration | | 1x2 Low | |
| EPRE ratio of PSS to SSS | dB | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | |
| Propagation Condition | | AWGN | AWGN |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |

Table A7.5.6.1.1.1-4: OTA related test parameters for BWP switching test case

| Parameter | Unit | Cell 1 | Cell 2 |
|--|-----------------------------------|------------------------------------|--------|
| Angle of arrival configuration | | Setup 1 defined in clause A.3.15.1 | |
| N_{oc} ^{Note1} | dBm/15kHz | -112 | -112 |
| N_{oc} ^{Note1} | dBm/SCS | -103 | -103 |
| SS-RSRP ^{Note2} | dBm/SCS ^{Note3} | -85 | -85 |
| \hat{E}_s/I_{ot} | dB | 18 | 18 |
| I_o ^{Note4} | dBm/95.04 MHz ^{Note4} | -56 | -56 |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone.</p> | | | |

A.7.5.6.1.1.2 Test Requirements

During T1, the UE shall start to send the ACK for PSCell in the DL slot right after DL slot $(i+T_{BWPswitchDelay}+kI)$.

During T3, the UE shall start to send the ACK for PSCell in the DL slot right after DL slot $(j+T_{BWPswitchDelay}+kI)$.

Where, kI is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1 and T3, the start time of SCell interruption during PCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of SCell shall not be longer than the interruption duration specified for active BWP switch in clause 8.2.2.2.5.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after DL slot $(i+Y1)$, $(j+Y2)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK.

A.7.5.6.1.2 NR FR1- NR FR2 DL active BWP switch of PCell with non-DRX in SA

A.7.5.6.1.2.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6, and interruption requirement on other active serving cell defined in clause 8.2.2.2.5.

The supported test configurations are shown in Table A.7.5.6.1.2.1-1 below. The test scenario comprises of one NR PCell (Cell 1) and one NR SCell (Cell 2). The general parameters are given in Table A.7.5.6.1.2.1-2. NR Cell-specific parameters are specified in Table A.7.5.6.1.2.1-3 below. OTA related test parameters are shown in table A.7.5.6.1.2.1-4 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 1 and the time duration of T2.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 2) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (SCell) on radio channel 2 (SCC).

UE is configured with 2 different UE-specific downlink bandwidth parts for PCell, BWP-1 and BWP-2, in Cell 1 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.

UE is indicated in firstActiveDownlinkBWP-Id that the active DL BWP is BWP-1 in PCell.

UE is configured with a bwp-InactivityTimer timer value for PCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for PCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted i . The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH no later than at the beginning of the DL slot right after PCell's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PCell no later than at the beginning of the DL slot right after slot ($i+T_{BWPswitchDelay}+kI$). The UE shall be continuously scheduled on PCell's BWP-2 no later than the beginning of the DL slot right after slot ($i+T_{BWPswitchDelay}$).

The starting time of SCell (Cell 2) interruption due to BWP switch on PCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on PCell(Cell 1).

During T3,

The time period T3 starts from the slot # j , where j is the beginning slot of the DL subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH no later than the beginning of the DL slot right after PCell's DL slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PCell at latest at the beginning of the DL slot right after slot ($j+T_{BWPswitchDelay}+kI$). The UE shall be continuously scheduled on PCell's BWP-1 no later than the beginning of the DL slot right after slot ($j+T_{BWPswitchDelay}$).

The starting time of SCell (Cell 2) interruption due to BWP switch of PCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in PCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

The test equipment verifies that potential interruption to SCell is carried out in the correct time span by monitoring ACK/NACK sent in SCell during BWP switch of PCell, respectively.

Table A.7.5.6.1.2.1-1: DL BWP switch supported test configurations

| Config | Description |
|--|--|
| 1 | PCell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode SCell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | PCell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode SCell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 3 | PCell: NR 30 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode SCell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note 1: The UE is only required to be tested in one of the supported test configurations | |

Table A.7.5.6.1.2.1-2: General test parameters for DL BWP switch in SA

| Parameter | Unit | Value | Comment |
|---|------|--------|---|
| NR RF Channel Number | | 2 | Two NR radio channel is used for this test |
| Active PCell | | Cell 1 | PCell on RF channel number 1. |
| Active SCell | | Cell 2 | SCell on RF channel number 2. |
| CP length | | Normal | |
| DRX | | OFF | For both PCell and PSCell |
| <i>bwp-InactivityTimer</i> | ms | 200 | |
| Cell-individual offset for cells on RF channel number 1 | dB | 0 | Individual offset for cells on PCC. |
| Cell-individual offset for cells on RF channel number 2 | dB | 0 | Individual offset for cells on PSCC. |
| Cell2 timing offset to cell1 | μs | 3 | Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1. |
| T1 | s | 0.2 | |
| T2 | s | 0.2 | |
| T3 | s | 0.2 | |

Table A6.5.6.1.2.1-3: NR Cell specific test parameters for DL BWP switch in SA

| Parameter | | Unit | Cell 1 | Cell2 |
|---|--------------|------|------------------------------------|---------------------------------|
| Frequency Range | | | FR1 | FR2 |
| Duplex mode | Config 1 | | FDD | TDD |
| | Config 2,3 | | TDD | |
| TDD configuration | Config 1 | | Not Applicable | TDDConf.3.1 |
| | Config 2 | | TDDConf.1.1 | |
| | Config 3 | | TDDConf.2.1 | |
| BW _{channel} | Config 1,2 | MHz | 10 MHz: N _{RB,c} = 52 | 100 MHz: N _{RB,c} = 66 |
| | Config 3 | | 40 MHz: N _{RB,c} = 106 | |
| Active BWP ID | | | 1, 2 | 3 |
| Downlink initial BWP Configuration | | | DLBWP.0.2 | |
| Uplink initial BWP Configuration | | | ULBWP.0.2 | |
| Downlink active BWP-1 Configuration | | | DLBWP.1.3 | - |
| Downlink active BWP-2 Configuration | | | DLBWP.1.3 | - |
| Uplink active BWP-1 Configuration | | | DLBWP.1.3 | - |
| Uplink active BWP-2 Configuration | | | DLBWP.1.3 | - |
| PDSCH Reference measurement channel | Config 1 | | SR.1.1 FDD | SR.3.1 TDD |
| | Config 2 | | SR.1.1 TDD | |
| | Config 3 | | SR.2.1 TDD | |
| RMSI CORESET parameters | Config 1 | | CR.1.1 FDD | CR.3.1 TDD |
| | Config 2 | | CR.1.1 TDD | |
| | Config 3 | | CR.2.1 TDD | |
| Dedicated CORESET parameters | Config 1 | | CCR.1.1 FDD | CCR.3.1 TDD |
| | Config 2 | | CCR.1.1 TDD | |
| | Config 3 | | CCR.2.1 TDD | |
| OCNG Patterns | | | OP.1 | |
| SSB Configuration | Config 1,2 | | SSB.1 FR1 | SSB.1 FR2 |
| | Config 3 | | SSB.2 FR1 | |
| TRS configuration | Config 1,2,3 | | - | TRS.2.1 TDD |
| TCI state | Config 1,2,3 | | TCI.State.0 | TCI.State.0 |
| SMTc Configuration | | | SMTc.1 | |
| Correlation Matrix and Antenna Configuration | | | NA Link only, see clause A.3.7A | 1x2 Low |
| EPRE ratio of PSS to SSS | | dB | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | |
| Propagation Condition | | | NA Link only, see clause A.3.7A | AWGN |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | |

Table A.7.5.6.1.2.1-4: OTA related test parameters for BWP switching test case

| Parameter | Unit | Cell 1 | Cell 2 |
|--|-----------------------------------|------------------------------------|------------------------------------|
| Angle of arrival configuration | | NA | Setup 1 defined in clause A.3.15.1 |
| N_{oc} ^{Note1} | dBm/15kHz | NA Link only, see clause A.3.7A | -112 |
| N_{oc} ^{Note1} | dBm/SCS | | -103 |
| SS-RSRP ^{Note2} | dBm/SCS ^{Note3} | | -85 |
| \hat{E}_s/I_{ot} | dB | | 18 |
| I_o ^{Note4} | dBm/95.04 MHz ^{Note4} | | -56 |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone.</p> | | | |

A.7.5.6.1.2.2 Test Requirements

During T1, the UE shall start to send the ACK for PSCell in the DL slot right after DL slot $(i+T_{BWPswitchDelay}+kI)$.

During T3, the UE shall start to send the ACK for PSCell in the DL slot right after DL slot $(j+T_{BWPswitchDelay}+kI)$.

Where, kI is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1 and T3, the start time of SCell interruption during PCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of SCell shall not be longer than the interruption duration specified for active BWP switch in clause 8.2.2.2.5.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after DL slot $(i+Y1)$, $(j+Y2)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK.

A.7.5.6.1.3 NR FR2 DL active BWP switch with non-DRX in SA

A.7.5.6.1.3.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6. Supported test configurations are shown in Table A.7.5.6.1.3.1-1.

The test scenario comprises of one NR cell (Cell 1) as given in Table A.7.5.6.1.3.1-2. Cell-specific parameters of NR PCell is specified in Table A.7.5.6.1.3.1-3 below. The OTA related test parameters for FR2 is shown in Table A.7.5.6.1.3.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE is configured with 2 different UE-specific downlink bandwidth parts, BWP-1 and BWP-2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1.
- UE is configured with a *bwp-InactivityTimer* timer value for Cell1.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for DL BWP switch, sent from the test equipment to the UE, is received at the UE side in Cell 1's slot # denoted i . The UE should switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after Cell 1's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the Cell 1 no later than at the beginning of the DL slot right after slot ($i+T_{BWPswitchDelay}+kI$). The UE shall be continuously scheduled on Cell 1's BWP-2 starting from the beginning of the DL slot right after slot ($i+T_{BWPswitchDelay}$).

During T2, the test equipment won't transmit DCI format for PDSCH reception on Cell 1.

During T3,

The time period T3 starts from the slot # j , where j is the beginning slot of the DL subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after Cell 1's DL slot ($j+T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the Cell 1 at latest at the beginning of the DL slot right after slot ($j+T_{BWPswitchDelay}+kI$). The UE shall be continuously scheduled on Cell 1's BWP-1 starting from the beginning of the DL slot right after slot ($j+T_{BWPswitchDelay}$).

The test equipment verifies the DL BWP switch time by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

Table A.7.5.6.1.3.1-1: DL BWP switch supported test configurations

| Config | Description |
|---------------|---|
| 1 | NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note 1: | Void. |
| Note 2: | A UE which fulfils the requirements in test case A.7.5.6.1.1 or A.7.5.6.1.2 can skip the test cases in A.7.5.6.1.3. |

Table A.7.5.6.1.3.1-2: General test parameters for DL BWP switch in SA

| Parameter | Unit | Value | Comment |
|----------------------------|------|--------|--|
| NR RF Channel Number | | 1 | One NR radio channel is used for this test |
| Active Cell | | Cell 1 | Cell on RF channel number 1. |
| CP length | | Normal | |
| DRX | | OFF | For both PCell and PSCell |
| <i>bwp-InactivityTimer</i> | ms | [200] | |
| T1 | s | [0.2] | |
| T2 | s | [0.2] | |
| T3 | s | [0.2] | |

Table A7.5.6.1.3.1-3: NR Cell specific test parameters for DL BWP switch in SA

| Parameter | Unit | Cell 1 |
|--|---|-----------------------------|
| Frequency Range | | FR2 |
| Duplex mode | | TDD |
| TDD configuration | | TDDConf.3.1 |
| $BW_{channel}$ | | 100 MHz: $N_{RB,c} = 66$ |
| Active BWP ID | | 1, 2 |
| Initial DL BWP Configuration | | DLBWP.0.2 ^{Note 2} |
| Active DL BWP-1 Configuration | | DLBWP.1.1 ^{Note 2} |
| Active DL BWP-2 Configuration | | DLBWP.1.3 ^{Note 2} |
| Initial UL BWP Configuration | | ULBWP.0.2 ^{Note 2} |
| Active UL BWP-1 Configuration | | ULBWP.1.1 ^{Note 2} |
| Active UL BWP-2 Configuration | | ULBWP.1.3 ^{Note 2} |
| PDSCH Reference measurement channel | | SR.3.1 TDD |
| RMSI CORESET parameters | | CR.3.1 TDD |
| Dedicated CORESET parameters | | CCR.3.1 TDD |
| OCNG Patterns | | OP.1 |
| SSB Configuration | | SSB.1 FR2 |
| SMTC Configuration | | SMTC.1 |
| TCI State | | TCI.State.0 |
| TRS Configuration | | TRS.2.1 TDD |
| Correlation Matrix and Antenna Configuration | | 1x2 Low |
| EPRE ratio of PSS to SSS | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | |
| EPRE ratio of PBCH to PBCH DMRS | | |
| EPRE ratio of PDCCH DMRS to SSS | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | |
| EPRE ratio of PDSCH DMRS to SSS | | |
| EPRE ratio of PDSCH to PDSCH | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | |
| Propagation Condition | | AWGN |
| Note 1: | OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | |
| Note 2: | For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3]. | |

Table A7.5.6.1.3.1-4: OTA related test parameters for DL BWP switch in SA

| Parameter | Unit | Cell 2 |
|--|---------------------------------|------------------------------------|
| Angle of arrival configuration | | Setup 1 defined in clause A.3.15.1 |
| N_{oc} ^{Note 1} | dBm/15 kHz | -112 |
| N_{oc} ^{Note 1} | dBm/SCS | -103 |
| SS-RSRP ^{Note 2} | dBm/120 kHz ^{Note 3} | -85 |
| \bar{E}_s/I_{ot} | dB | 18 |
| \bar{E}_s/N_{oc} ^{Note 5} | dB | 18 |
| I_o ^{Note 2} | dBm/95.04 MHz ^{Note 4} | -56 |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone.</p> | | |

A.7.5.6.1.3.2 Test Requirements

During T1, the UE shall start to send the ACK for Cell 1 in the DL slot right after slot $(i+T_{BWPswitchDelay}+kI)$.

During T3, the UE shall start to send the ACK for Cell 1 in the DL slot right after slot $(j+T_{BWPswitchDelay}+kI)$.

Where, kI is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after slot $(i+T_{BWPswitchDelay}+kI)$, $(j+T_{BWPswitchDelay}+kI)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK.

A.7.5.6.2 RRC-based Active BWP Switch

A.7.5.6.2.1 NR FR2 DL active BWP switch of PCell with non-DRX in SA

A.7.5.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6.3. Supported test configurations are shown in Table A.7.5.6.2.1.1-1.

The test scenario comprises of one NR PCell (Cell 1) as given in Table A.7.5.6.2.1.1-2. Cell-specific parameters of NR PCell are specified in Table A.7.5.6.2.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1 (PCell).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PCell.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part configuration.

The UE shall be able to completely receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i + T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$) as defined in clause 8.6.3 and be ready for the reception of uplink grant for the PSCell no later than at the beginning of the DL slot right after slot ($i + T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$). The UE shall be continuously scheduled on PSCell's BWP-1 starting from the beginning of the DL slot right after slot ($i + T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$).

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in clause 8.6.3.

The test equipment verifies the DL BWP switch time in PSCell by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when RRC Reconfiguration Complete message is received.

Table A.7.5.6.2.1.1-1: DL BWP switch supported test configurations

| Config | Description |
|--|--|
| 1 | NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note 1: The UE is only required to be tested in one of the supported test configurations | |

Table A.7.5.6.2.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

| Parameter | Unit | Value | Comment |
|---|------|--------|--|
| NR RF Channel Number | | 1 | One NR radio channel is used for this test |
| Active PCell | | Cell 1 | PCell on RF channel number 1. |
| CP length | | Normal | |
| DRX | | OFF | |
| Cell-individual offset for cells on RF channel number 1 | dB | 0 | Individual offset for cells on PCC. |
| T1 | s | [0.2] | |

Table A.7.5.6.2.1.1-3: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

| Parameter | | Unit | Cell 1 |
|--|-------------------------------|------|--------------------------|
| Frequency Range | | | FR2 |
| Duplex mode | | | TDD |
| TDD configuration | | | TDDConf.3.1 |
| BW_{channel} | | | 100 MHz: $N_{RB,c} = 66$ |
| Active BWP ID | | | 1 |
| Initial DL BWP Configuration | | | DLBWP.0.2 |
| Initial UL BWP Configuration | | | ULBWP.0.2 |
| Initial Condition | Active DL BWP-1 Configuration | | DLBWP.1.3 |
| | Active UL BWP-1 Configuration | | ULBWP.1.3 |
| Final Condition | Active DL BWP-1 Configuration | | DLBWP.1.1 |
| | Active UL BWP-1 Configuration | | ULBWP.1.1 |
| PDSCH Reference measurement channel | | | SR.3.1 TDD |
| RMSI CORESET parameters | | | CR.3.1 TDD |
| Dedicated CORESET parameters | | | CCR.3.1 TDD |
| OCNG Patterns | | | OP.1 |
| SSB Configuration | | | SSB.1 FR2 |
| SMTC Configuration | | | SMTC.1 |
| TCI State | | | TCI.State.0 |
| TRS Configuration | | | TRS.2.1 TDD |
| Antenna Configuration | | | 1x2 |
| Propagation Condition | | | AWGN |
| EPRE ratio of PSS to SSS | | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |
| Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | |
| Note 3: SS-RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | |
| Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3]. | | | |

Table A.7.5.6.2.1.1-4: OTA related test parameters for BWP switching test case

| Parameter | | Unit | Cell 2 |
|--------------------------------|--------------|-----------|-----------------------------------|
| Angle of arrival configuration | | | Setup 1 according to table A.3.15 |
| N_{oc} ^{Note1} | NR_TDD_FR2_A | dBm/15kHz | -112 |
| | NR_TDD_FR2_B | | |
| | NR_TDD_FR2_F | | |
| | NR_TDD_FR2_G | | |
| | NR_TDD_FR2_T | | |
| | NR_TDD_FR2_Y | | |

| | | | |
|---|--------------|-----------------------------------|------|
| N_{oc} ^{Note1} | NR_TDD_FR2_A | dBm/SCS | -103 |
| | NR_TDD_FR2_B | | |
| | NR_TDD_FR2_F | | |
| | NR_TDD_FR2_G | | |
| | NR_TDD_FR2_T | | |
| | NR_TDD_FR2_Y | | |
| SS-RSRP ^{Note2} | NR_TDD_FR2_A | dBm/SCS ^{Note3} | -85 |
| | NR_TDD_FR2_B | | |
| | NR_TDD_FR2_F | | |
| | NR_TDD_FR2_G | | |
| | NR_TDD_FR2_T | | |
| | NR_TDD_FR2_Y | | |
| I _o ^{Note2} | NR_TDD_FR2_A | dBm/95.04 MHz ^{Note4} | -56 |
| | NR_TDD_FR2_B | | |
| | NR_TDD_FR2_F | | |
| | NR_TDD_FR2_G | | |
| | NR_TDD_FR2_T | | |
| | NR_TDD_FR2_Y | | |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone</p> | | | |

A.7.5.6.2.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PCell in the beginning of the DL slot right after slot ($i+T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}$).

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.7 PSCell addition and release delay

A.7.5.7.1 Addition and Release Delay of known NR PSCell

A.7.5.7.1.1 Test Purpose and Environment

The purpose of this test is to verify the PSCell addition and release delay requirements defined in clauses 8.9.2 and 8.9.3, respectively, for the case where the PSCell is known to the UE at the time of addition.

The supported test configurations are given in Table A.7.5.7.1.1-1. The test scenario comprises two NR cells, Cell 1 and Cell 2, on radio channel 1 in FR1 and radio channel 2 in FR2, respectively. Test parameters are given in Tables A.7.5.7.1.1-2 and A.7.5.7.1.1-3 below. The test consists of five time periods with durations T1, T2, T3, T4 and T5, respectively.

At the start of T1, the UE shall be connected to Cell 1 (PCell) on radio channel 1 (PCC) and shall only monitor PCC and hence be unaware of Cell 2 (PSCell-to-be) on radio channel 2. Before the start of T2, the test system shall send measurement control information including measurement gap configuration and event-triggered reporting configuration for measurements on radio channel 2.

During T2, the UE shall identify Cell 2 and send an event-triggered report. When the tests system receives the report, it shall send updated measurement control information where the measurement gap pattern is released. Before the start of T3, the test system shall send a RRC message instructing the UE to add PSCell (Cell 2), and further instructing the UE to report CSI periodically in the PSCell once it has been added. Reception by the UE of this RRC message defines the start of T3.

During T3, the UE shall carry out random access towards the PSCell. Reception by the test system of the PRACH preamble defines the start of T4.

During T4, the UE shall send periodic CSI reports in PSCell. After having received at least one such report, the test system shall send a RRC message instructing the UE to release the PSCell. Reception by the UE of the RRC message defines the start of T5.

During T5, the UE shall release the PSCell.

Table A.7.5.7.1.1-1: Supported test configurations for FR2 PSCell

| Config | Description |
|--|---|
| 1 | FR1 FDD SSB SCS 15kHz BW 10MHz – FR2 TDD SSB SCS 240kHz BW 100MHz |
| 2 | FR1 TDD SSB SCS 15kHz BW 10MHz – FR2 TDD SSB SCS 240kHz BW 100MHz |
| 3 | FR1 TDD SSB SCS 30kHz BW 40MHz – FR2 TDD SSB SCS 240kHz BW 100MHz |
| Note 1: The UE is only required to be tested in one of the supported test configurations | |

Table A.7.5.7.1.1-2: General test parameters for PSCell addition and release delay

| Parameter | | Unit | Value | Comment |
|---|-----------------|------|---------------------------|--|
| RF Channel Number | | | 1, 2 | Two radio channels are used for this test |
| Active PCell | | | Cell 1 | PCell on RF channel number 1 in FR1 |
| Neighbour cell | | | Cell 2 | Neighbour cell (PSCell-to-be) on RF channel number 2 in FR2 |
| A4 | Hysteresis | dB | 0 | Hysteresis for event A4 |
| | Threshold RSRP | dBm | -97 | Threshold for event A4 |
| | Time to Trigger | S | 0 | Time to trigger for event A4 |
| DRX | | | OFF | For both PCell and PSCell once activated |
| Measurement gap pattern ID | | | 0 | Gaps are configured before T2 and released before T3. |
| PRACH configuration in Cell 2 | | | FR2 PRACH configuration 2 | PRACH configuration as specified in Clause A.3.8.3.2. |
| CSI reporting periodicity and offset configuration for Cell 2 | | ms | [2] | |
| T1 | | s | 5 | During this time the PCell is known and Cell 2 is unknown. |
| T2 | | s | 1 | During this time the UE shall identify neighbour cell 2 and report event B1. |
| T3 | | s | 1 | During this time the UE adds the PSCell. |
| T4 | | s | 1 | During this time the UE sends CSI reports for PSCell. |
| T5 | | s | 1 | During this time the UE releases the PSCell. |

Table A.7.5.7.1.1-3: NR Cell specific test parameters for PSCell addition and release delay

| Parameter | Unit | Config | Cell 1 | Cell2 | | | | |
|---------------------------------------|---------------|--------|-----------------------------|---|--------|----|----|----|
| | | | | T1 | T2 | T3 | T4 | T5 |
| AoA setup | | 1,2,3 | N/A | Setup 2a according to clause A.3.15.2.1 | | | | |
| Frequency Range | | 1,2,3 | FR1 | FR2 | | | | |
| Duplex mode | | 1 | FDD | TDD | | | | |
| | | 2,3 | TDD | | | | | |
| TDD configuration | | 1 | – | TDDConf.3.1 | | | | |
| | | 2 | TDDConf.1.1 | | | | | |
| | | 3 | TDDConf.2.1 | | | | | |
| BW _{channel} | MHz | 1,2 | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 | | | | |
| | | 3 | 40: N _{RB,c} = 106 | | | | | |
| Initial Downlink BWP configuration | | 1,2,3 | DLBWP.0.1 | DLBWP.0.1 | | | | |
| Initial Uplink BWP configuration | | 1,2,3 | ULBWP.0.1 | ULBWP.0.1 | | | | |
| Dedicated Downlink BWP configuration | | 1,2,3 | DLBWP.1.1 | DLBWP.1.1 | | | | |
| Dedicated Uplink BWP configuration | | 1,2,3 | ULBWP.1.1 | ULBWP.1.1 | | | | |
| PDSCH Reference Measurement Channel | | 1 | SR.1.1 FDD | SR.3.1 TDD | | | | |
| | | 2 | SR.1.1 TDD | | | | | |
| | | 3 | SR.2.1 TDD | | | | | |
| TRS configuration | | 1,2,3 | – | TRS.2.1 TDD | | | | |
| TCI state | | 1,2,3 | – | TCI.State.0 | | | | |
| RMSI CORESET parameters | | 1 | CR.1.1 FDD | CR.3.1 TDD | | | | |
| | | 2 | CR.1.1 TDD | | | | | |
| | | 3 | CR.2.1 TDD | | | | | |
| Dedicated CORESET parameters | | 1 | CCR.1.1 FDD | CCR.3.1 TDD | | | | |
| | | 2 | CCR.1.1 TDD | | | | | |
| | | 3 | CCR.2.1 TDD | | | | | |
| OCNG Patterns ^{Note1} | | 1,2,3 | OP.1 | OP.1 | | | | |
| SSB configuration | | 1,2 | SSB.1 FR1 | SSB.2 FR2 | | | | |
| | | 3 | SSB.2 FR1 | | | | | |
| SMTC configuration | | 1,2,3 | SMTC.2 | SMTC.1 | | | | |
| Correlation Matrix and Antenna config | | 1,2,3 | 1x2 Low | 1x2 Low | | | | |
| EPRE ratio of PSS to SSS | dB | 1,2,3 | 0 | 0 | | | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | | | | | | | |
| N _{oc} ^{Note2} | dBm/15kHz | 1,2,3 | -98 | N/A | -98 | | | |
| N _{oc} ^{Note2} | dBm/SCS | 1,2 | -98 | N/A | -89 | | | |
| | | 3 | -95 | | | | | |
| \hat{E}_s/I_{ot} | dB | 1,2,3 | 5 | –∞ | 5 | | | |
| \hat{E}_s/N_{oc} | dB | 1,2,3 | 5 | –∞ | 5 | | | |
| SS-RSRP ^{Note3,4} | dBm/SCS | 1,2 | -93 | N/A | -84 | | | |
| | | 3 | -90 | | | | | |
| I _o ^{Note3,4} | dBm/9.36 MHz | 1,2 | -63.85 | – | – | | | |
| | dBm/38.16 MHz | 3 | -57.76 | – | – | | | |
| | dBm/95.04 MHz | 1,2,3 | – | N/A | -53.82 | | | |
| Propagation Condition | | 1,2,3 | AWGN | AWGN | | | | |

| | |
|---------|---|
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. |
| Note 3: | SS-RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves. SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. |
| Note 4: | Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone. |

A.7.5.7.1.2 Test Requirements

The UE shall transmit the PRACH preamble to PSCell at latest [112] ms into T3.

The UE shall transmit at least one periodic CSI report for PSCell during T4.

The UE shall stop transmitting CSI reports for PSCell at latest [20] ms into T5.

All of the above test requirements shall be fulfilled in order for the observed PSCell addition and release delay to be counted as correct. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.7.2 Addition and Release Delay of unknown NR PSCell

A.7.5.7.2.1 Test Purpose and Environment

The purpose of this test is to verify the PSCell addition and release delay requirements defined in clauses 8.9.2 and 8.9.3, respectively, for the case where the PSCell is unknown to the UE at the time of addition.

The supported test configurations are given in Table A.7.5.7.2.1-1. The test scenario comprises two NR cells, Cell 1 and Cell 2, on radio channel 1 in FR1 and radio channel 2 in FR2, respectively. Test parameters are given in Tables A.7.5.7.2.1-2 and A.7.5.7.2.1-3 below. The test consists of four time periods with durations T1, T2, T3 and T4, respectively.

At the start of T1, the UE shall be connected to Cell 1 (PCell) on radio channel 1 (PCC) and shall only monitor PCC and hence be unaware of Cell 2 (PSCell-to-be) on radio channel 2. At the end of T1, the test system shall send a RRC message instructing the UE to add PSCell (Cell 2), and further instructing the UE to report CSI periodically in the PSCell once it has been added. Reception by the UE of this RRC message defines the start of T2.

During T2, the UE shall identify PSCell and carry out random access towards the PSCell. Reception by the test system of the PRACH preamble defines the start of T3.

During T3, the UE shall send periodic CSI reports in PSCell. After having received at least one such report, the test system shall send a RRC message instructing the UE to release the PSCell. Reception by the UE of the RRC message defines the start of T4.

During T4, the UE shall release the PSCell.

Table A.7.5.7.2.1-1: Supported test configurations for FR2 PSCell

| Config | Description |
|--|---|
| 1 | FR1 FDD SSB SCS 15kHz BW 10MHz – FR2 TDD SSB SCS 240kHz BW 100MHz |
| 2 | FR1 TDD SSB SCS 15kHz BW 10MHz – FR2 TDD SSB SCS 240kHz BW 100MHz |
| 3 | FR1 TDD SSB SCS 30kHz BW 40MHz – FR2 TDD SSB SCS 240kHz BW 100MHz |
| Note 1: The UE is only required to be tested in one of the supported test configurations | |

Table A.7.5.7.2.1-2: General test parameters for PSCell addition and release delay

| Parameter | Unit | Value | Comment |
|---|-------------|---------------------------|---|
| RF Channel Number | | 1, 2 | Two radio channels are used for this test |
| Active PCell | | Cell 1 | PCell on RF channel number 1 in FR1 |
| Neighbour cell | | Cell 2 | Neighbour cell (PSCell-to-be) on RF channel number 2 in FR2 |
| DRX | | OFF | For both PCell and PSCell once activated |
| PRACH configuration in Cell 2 | | FR2 PRACH configuration 2 | PRACH configuration as specified in Clause A.3.8.3.2. |
| CSI reporting periodicity and offset configuration for Cell 2 | ms | [2] | |
| T1 | s | 5 | During this time the PCell is known and Cell 2 is unknown. |
| T2 | s | 1 | During this time the UE adds the PSCell. |
| T3 | s | 1 | During this time the UE sends CSI reports for PSCell. |
| T4 | s | 1 | During this time the UE releases the PSCell. |

Table A.7.5.7.2.1-3: NR Cell specific test parameters for PSCell addition and release delay

| Parameter | Unit | Config | Cell 1 | Cell2 | | | |
|---------------------------------------|---------------|--------|-----------------------------|---|--------|----|----|
| | | | | T1 | T2 | T3 | T4 |
| AoA setup | | 1,2,3 | N/A | Setup 2a according to clause A.3.15.2.1 | | | |
| Frequency Range | | 1,2,3 | FR1 | FR2 | | | |
| Duplex mode | | 1 | FDD | TDD | | | |
| | | 2,3 | TDD | | | | |
| TDD configuration | | 1 | – | TDDConf.3.1 | | | |
| | | 2 | TDDConf.1.1 | | | | |
| | | 3 | TDDConf.2.1 | | | | |
| BW _{channel} | MHz | 1,2 | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 | | | |
| | | 3 | 40: N _{RB,c} = 106 | | | | |
| Initial Downlink BWP configuration | | 1,2,3 | DLBWP.0.1 | DLBWP.0.1 | | | |
| Initial Uplink BWP configuration | | 1,2,3 | ULBWP.0.1 | ULBWP.0.1 | | | |
| Dedicated Downlink BWP configuration | | 1,2,3 | DLBWP.1.1 | DLBWP.1.1 | | | |
| Dedicated Uplink BWP configuration | | 1,2,3 | ULBWP.1.1 | ULBWP.1.1 | | | |
| PDSCH Reference Measurement Channel | | 1 | SR.1.1 FDD | SR.3.1 TDD | | | |
| | | 2 | SR.1.1 TDD | | | | |
| | | 3 | SR.2.1 TDD | | | | |
| TRS configuration | | 1,2,3 | – | TRS.2.1 TDD | | | |
| TCI state | | 1,2,3 | – | TCI.State.0 | | | |
| RMSI CORESET parameters | | 1 | CR.1.1 FDD | CR.3.1 TDD | | | |
| | | 2 | CR.1.1 TDD | | | | |
| | | 3 | CR.2.1 TDD | | | | |
| Dedicated CORESET parameters | | 1 | CCR.1.1 FDD | CCR.3.1 TDD | | | |
| | | 2 | CCR.1.1 TDD | | | | |
| | | 3 | CCR.2.1 TDD | | | | |
| OCNG Patterns ^{Note1} | | 1,2,3 | OP.1 | OP.1 | | | |
| SSB configuration | | 1,2 | SSB.1 FR1 | SSB.2 FR2 | | | |
| | | 3 | SSB.2 FR1 | | | | |
| SMTC configuration | | 1,2,3 | SMTC.2 | SMTC.1 | | | |
| Correlation Matrix and Antenna config | | 1,2,3 | 1x2 Low | 1x2 Low | | | |
| EPRE ratio of PSS to SSS | dB | 1,2,3 | 0 | 0 | | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | | | | | | |
| N _{oc} ^{Note2} | dBm/15kHz | 1,2,3 | -98 | N/A | -98 | | |
| N _{oc} ^{Note2} | dBm/SCS | 1,2 | -98 | N/A | -89 | | |
| | | 3 | -95 | | | | |
| \hat{E}_s/I_{ot} | dB | 1,2,3 | 5 | –∞ | 5 | | |
| \hat{E}_s/N_{oc} | dB | 1,2,3 | 5 | –∞ | 5 | | |
| SS-RSRP ^{Note3,4} | dBm/SCS | 1,2 | -93 | N/A | -84 | | |
| | | 3 | -90 | | | | |
| I _o ^{Note3,4} | dBm/9.36 MHz | 1,2 | -63.85 | – | – | | |
| | dBm/38.16 MHz | 3 | -57.76 | – | – | | |
| | dBm/95.04 MHz | 1,2,3 | – | N/A | -53.82 | | |
| Propagation Condition | | 1,2,3 | AWGN | AWGN | | | |

| | |
|---------|---|
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. |
| Note 3: | SS-RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves. SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. |
| Note 4: | Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone. |

A.7.5.7.2.2 Test Requirements

The UE shall transmit the PRACH preamble to PSCell at latest [572] ms into T2.

The UE shall transmit at least one periodic CSI report for PSCell during T3.

The UE shall stop transmitting CSI reports for PSCell at latest [20] ms into T4.

All of the above test requirements shall be fulfilled in order for the observed PSCell addition and release delay to be counted as correct. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.8 Active TCI state switch delay

A.7.5.8.1 MAC-CE based active TCI state switch

A.7.5.8.1.1 NR PCell FR2 active TCI state switch for a known TCI state

A.7.5.8.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the active TCI state switch delay requirement defined in clause 8.10.3. Supported test configuration is shown in Table A.7.5.8.1.1.1-1.

The test scenario comprises of one NR PCell (Cell 1) as given in Table A.7.5.8.1.1.1-2. Cell-specific parameters of NR PCell are specified in Table A.7.5.8.1.1.1-3 below. The OTA related test parameters for FR2 are shown in Table A.7.5.8.1.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PCell to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE is configured with 2 different TCI states for PCell, PDCCH TCI state 0 (QCL'd to SSB0) and TCIstate 1 (QCL'd to SSB1), in Cell 1 before starting the test.
- UE is indicated in TCI state 0 as the active PDCCH TCI state

The test consists of two time periods, T1 and T2. During T1 only SSB to which PDCCH-TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI state 1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a MAC-CE command indicating a switch to TCI state 1. *tc- PresentInDCI* is not configured in the PDSCH configuration, i.e. TCI state for the PDSCH is identical to the PDCCH TCI state.

The test equipment verifies that UE can be scheduled on PCell on TCI state 0 till $n + T_{HARQ} + 3 \text{ ms} + T_{\text{first-SSB}}$. The test equipment also verifies the TCI state switch time in PCell by scheduling the UE on TCI state 1 after $n + T_{HARQ} + 3 \text{ ms} + (T_{\text{first-SSB}} + T_{\text{SSB-proc}})$.

Table A.7.5.8.1.1-1: Supported test configurations

| Config | Description |
|--------|--|
| 1 | NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |

Table A.7.5.8.1.1-2: General test parameters for TCI state switch

| Parameter | Unit | Value | Comment |
|---|------|--------|--|
| NR RF Channel Number | | 1 | One NR radio channel is used for this test |
| Active PCell | | Cell 1 | PCell on RF channel number 1. |
| CP length | | Normal | |
| DRX | | OFF | |
| Cell-individual offset for cells on RF channel number 1 | dB | 0 | Individual offset for cells on PCC. |
| Cell-individual offset for cells on RF channel number 2 | dB | 0 | Individual offset for cells on PSCC. |
| Cell2 timing offset to cell1 | μs | 3 | Synchronous EN-DC |
| T1 | s | [0,2] | |
| T2 | s | [0,2] | |

Table A.7.5.8.1.1-3: NR Cell specific test parameters for TCI state switch

| Parameter | Unit | Cell 1 |
|---|------|--------------------------|
| Frequency Range | | FR2 |
| Duplex mode | | TDD |
| TDD configuration | | TDDConf.3.1 |
| $BW_{channel}$ | | 100 MHz: $N_{RB,c} = 66$ |
| Initial DL BWP Configuration | | DLBWP.0.2 |
| Dedicated DL BWP Configuration | | DLBWP.1.1 |
| Initial UL BWP Configuration | | ULBWP.0.2 |
| Dedicated UL BWP Configuration | | ULBWP.1.1 |
| PDSCH Reference measurement channel | | SR.3.1 TDD |
| RMSI CORESET parameters | | CR.3.1 TDD |
| Dedicated CORESET parameters | | CCR.3.1 TDD |
| OCNG Patterns | | OP.1 |
| SSB Configuration | | SSB.1 FR2 |
| SMTC Configuration | | SMTC.1 |
| TCI State 0 | | TC. State.0 |
| TCI State 1 | | TCI.State.1 |
| TRS Configuration | | TRS.2.1 TDD |
| Correlation Matrix and Antenna Configuration | | 1x2 Low |
| EPRE ratio of PSS to SSS | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | |
| EPRE ratio of PBCH to PBCH DMRS | | |
| EPRE ratio of PDCCH DMRS to SSS | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | |
| EPRE ratio of PDSCH DMRS to SSS | | |
| EPRE ratio of PDSCH to PDSCH | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | |
| Propagation Condition | | |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | |

Table A.7.5.8.1.1-4: OTA related test parameters for TCI state switch

| Parameter | Unit | Cell 1 | | | |
|-----------|------|--------|----|------|----|
| | | SSB0 | | SSB1 | |
| | | T1 | T2 | T1 | T2 |
| | | | | | |

| Angle of arrival configuration | | Setup 3 According to clause A.3.15.3 | | | |
|--------------------------------|--|--------------------------------------|-------|-----------|-------|
| | | AoA1 | | AoA2 | |
| N_{oc} ^{Note 1} | dBm/15 kHz | [-92.1] | | | |
| N_{oc} ^{Note 1} | dBm/SCS | [-83.1] | | | |
| \bar{E}_s/N_{oc} | dB | 1 | 1 | -Infinity | 1 |
| SS-RSRP ^{Note 2} | dBm/120 kHz ^{Note 3} | -82.1 | -82.1 | -Infinity | -82.1 |
| l_o ^{Note 2} | dBm/95.04 MHz ^{Note 4} | -54.9 | -54.9 | -54.9 | -54.9 |
| Note 1: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | |
| Note 2: | SS-RSRP and l_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | |
| Note 3: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | | |
| Note 4: | Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone | | | | |
| Note 5: | As observed with 0dBi gain antenna at the center of the quiet zone. | | | | |

A.7.5.8.1.1.2 Test Requirements

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After receiving MAC-CE command in slot n, UE shall:

- be able to continue to receive on TCI state 0 till $n + T_{HARQ} + 3 \text{ ms} + T_{\text{first-SSB}}$
- be able to start receiving on TCI state 1 after $n + T_{HARQ} + 5 \text{ ms} + T_{O_k} * T_{\text{first-SSB}}$

A.7.5.8.2 RRC based active TCI state switch

A.7.5.8.2.1 NR PCell FR2 active TCI state switch for a known TCI state

A.7.5.8.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the active TCI state switch delay requirement defined in clause 8.10.3. Supported test configuration is shown in Table A.7.5.8.2.1.1-1.

The test scenario comprises of one NR PCell as given in Table A.7.5.8.2.1.1-2. Cell-specific parameters of NR PCell is specified in Table A.7.5.8.2.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.7.5.8.2.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PCell to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE is configured with 1 TCI state for PCell, PDCCH-TCI-state0 (QCL'd to SSB0)
- UE is indicated in TCI state0 as the active TCI state

The test consists of two time periods, T1 and T2. During T1 only SSB to which TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI-state0 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280 ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a RRC command indicating a switch to TCI-state1.

The test equipment verifies the TCI state switch time in PCell by scheduling the UE on TCI state 1 after $n + T_{\text{RRC_processing}} + T_{\text{first-SSB}} + 2\text{ms}$.

Table A.7.5.8.2.1.1-1: Supported test configurations

| Config | Description |
|--------|--|
| 1 | NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |

Table A.7.5.8.2.1.1-2: General test parameters for TCI state switch

| Parameter | Unit | Value | Comment |
|---|------|--------|--|
| NR RF Channel Number | | 1 | One NR radio channel is used for this test |
| Active PCell | | Cell 1 | PCell on RF channel number 1. |
| CP length | | Normal | |
| DRX | | OFF | |
| Cell-individual offset for cells on RF channel number 1 | dB | 0 | Individual offset for cells on PCC. |
| Cell-individual offset for cells on RF channel number 2 | dB | 0 | Individual offset for cells on PSCC. |
| Cell2 timing offset to cell1 | μs | 3 | Synchronous EN-DC |
| T1 | s | [0.2] | |
| T2 | s | [0.2] | |

Table A.7.5.8.2.1.1-3: NR Cell specific test parameters for TCI state switch

| Parameter | Unit | Cell 1 |
|---|------|--------------------------|
| Frequency Range | | FR2 |
| Duplex mode | | TDD |
| TDD configuration | | TDDConf.3.1 |
| $BW_{channel}$ | | 100 MHz: $N_{RB,c} = 66$ |
| Initial DL BWP Configuration | | DLBWP.0.2 |
| Dedicated DL BWP Configuration | | DLBWP.1.1 |
| Initial UL BWP Configuration | | ULBWP.0.2 |
| Dedicated UL BWP Configuration | | ULBWP.1.1 |
| PDSCH Reference measurement channel | | SR.3.1 TDD |
| RMSI CORESET parameters | | CR.3.1 TDD |
| Dedicated CORESET parameters | | CCR.3.1 TDD |
| OCNG Patterns | | OP.1 |
| SSB Configuration | | SSB.1 FR2 |
| SMTTC Configuration | | SMTTC.1 |
| TCI State 0 | | TC. State.0 |
| TCI State 1 | | TCI.State.1 |
| TRS Configuration | | TRS.2.1 TDD |
| Correlation Matrix and Antenna Configuration | | 1x2 Low |
| EPRE ratio of PSS to SSS | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | |
| EPRE ratio of PBCH to PBCH DMRS | | |
| EPRE ratio of PDCCH DMRS to SSS | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | |
| EPRE ratio of PDSCH DMRS to SSS | | |
| EPRE ratio of PDSCH to PDSCH | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | |
| Propagation Condition | | |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | |

Table A.7.5.8.2.1.1-4: OTA related test parameters for TCI state switch

| Parameter | Unit | Cell 1 | | | |
|-----------|------|--------|----|------|----|
| | | SSB0 | | SSB1 | |
| | | T1 | T2 | T1 | T2 |
| | | | | | |

| Angle of arrival configuration | | Setup 3 According to clause A.3.15.3 | | | |
|--------------------------------|--|--------------------------------------|-------|-----------|-------|
| | | AoA1 | | AoA2 | |
| N_{oc} ^{Note 1} | dBm/15 kHz | [-92.1] | | | |
| N_{oc} ^{Note 1} | dBm/SCS | [-83.1] | | | |
| \tilde{E}_s/N_{oc} | dB | 1 | 1 | -Infinity | 1 |
| SS-RSRP ^{Note 2} | dBm/120 kHz ^{Note 3} | -82.1 | -82.1 | -Infinity | -82.1 |
| l_o ^{Note 2} | dBm/95.04 MHz ^{Note 4} | -54.9 | -54.9 | -54.9 | -54.9 |
| Note 1: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | |
| Note 2: | SS-RSRP and l_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | |
| Note 3: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | | |
| Note 4: | Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone | | | | |
| Note 5: | As observed with 0dBi gain antenna at the center of the quiet zone. | | | | |

A.7.5.8.2.1.2 Test Requirements

During T2, UE shall send L1-RSRP report with both SSB0 and SSB1.

After receiving RRC command in slot n , UE shall be able to start receiving on TCI state 1 after $n + T_{RRC_processing} + T_{first-SSB} + 2ms$.

A.7.6 Measurement procedure

A.7.6.1 Intra-frequency Measurements

A.7.6.1.1 SA event triggered reporting test without gap under non-DRX

A.7.6.1.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.1.1-1.

Table A.7.6.1.1.1-1: supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations. |

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.1.1-2, A.7.6.1.1.1-3 and A.7.6.1.1.1-4 below.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.7.6.1.1.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

| Parameter | Unit | Config | Value | Comment |
|---------------------------------------|------|--------|----------------------|---|
| Active cell | | 1, 2 | PCell (Cell 1) | |
| Neighbour cell | | 1, 2 | Cell 2 | Cell to be identified. |
| RF Channel Number | | 1, 2 | 1: Cell 1 and Cell 2 | One TDD carrier frequency is used for the NR cells. |
| SMTC configuration | | 1, 2 | SMTC.1 | |
| A3-Offset | dB | 1, 2 | -6 | |
| CP length | | 1, 2 | Normal | |
| Hysteresis | dB | 1, 2 | 0 | |
| Time To Trigger | s | 1, 2 | 0 | |
| Filter coefficient | | 1, 2 | 0 | L3 filtering is not used |
| DRX | | 1, 2 | OFF | |
| Time offset between Cell 1 and Cell 2 | | 1, 2 | 3 μ s | Synchronous cells |
| T1 | s | 1, 2 | 5 | |
| T2 | s | 1, 2 | 5 | |

Table A.7.6.1.1.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

| Parameter | Unit | Config | Cell 1 | | Cell 2 | |
|-------------------------------------|------|--------|------------------------|----|------------------------|----|
| | | | T1 | T2 | T1 | T2 |
| TDD configuration | | 1, 2 | TDDConf.3.1 | | TDDConf.3.1 | |
| Initial BWP configuration | | 1, 2 | DLBWP.0.1 ULBWP.0.1 | | DLBWP.0.1 ULBWP.0.1 | |
| Active DL BWP configuration | | 1, 2 | DLBWP.1.1 | | DLBWP.1.1 | |
| Active UL BWP configuration | | 1, 2 | ULBWP.1.1 | | ULBWP.1.1 | |
| RLM-RS | | 1, 2 | SSB | | SSB | |
| PDSCH RMC configuration | | 1, 2 | SR.3.1 TDD | | N/A | |
| RMSI CORESET RMC configuration | | 1, 2 | CR.3.1 TDD | | CR.3.1 TDD | |
| Dedicated CORESET RMC configuration | | 1, 2 | CCR.3.1 TDD | | CCR.3.1 TDD | |
| TRS configuration | | 1, 2 | TRS.2.1 TDD | | N/A | |
| PDSCH/PDCCH TCI states | | 1, 2 | TCI.State.2 | | N/A | |
| OCNG Patterns | | 1, 2 | OP.1 | | OP.1 | |
| SSB | | 1 | SSB.1 FR2 | | SSB.1 FR2 | |
| | | 2 | SSB.2 FR2 | | SSB.2 FR2 | |
| Propagation Condition | | 1, 2 | AWGN | | | |

Table A.7.6.1.1.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

| Parameter | Unit | Config | Cell 1 | | Cell 2 | |
|-----------|------|--------|--------|----|--------|----|
| | | | T1 | T2 | T1 | T2 |

| AoA setup | | 1, 2 | Setup 3 defined in A.3.15.3 | | | |
|---|--------------|------|-----------------------------|-----|-----------|-----|
| | | | AoA1 | | AoA2 | |
| \hat{E}_s/I_{ot} | dB | 1, 2 | 4 | 4 | -Infinity | 8 |
| N_{oc} <small>Note 2</small> | dBm/15 KHz | 1, 2 | -102 | | | |
| N_{oc} <small>Note 2</small> | dBm/SCS | 1 | -93 | | | |
| | | 2 | -90 | | | |
| SS-RSRP | dBm/SCS | 1 | -89 | -89 | -Infinity | -85 |
| | | 2 | -86 | -86 | -Infinity | -82 |
| \hat{E}_s/N_{oc} | dB | 1, 2 | 4 | 4 | -Infinity | 8 |
| I_o | dBm/95.04MHz | 1, 2 | -58.56 | | -55.38 | |
| <p>Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | |

A.7.6.1.1.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 2.4s for a UE supporting power class 1,
- 1.44s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCC}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCC.

A.7.6.1.2 SA event triggered reporting test without gap under DRX

A.7.6.1.2.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.2.1-1.

Table A.7.6.1.2.1-1: supported test configurations

| Configuration | Description |
|---|---|
| 1 | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations. | |

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.2.1-2 ~ 6.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.1.2.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap with DRX

| Parameter | Unit | Config | Value | | Comment |
|---------------------------------------|------|--------|----------------------|--------|---|
| | | | Test 1 | Test 2 | |
| Active cell | | 1, 2 | PCell (Cell 1) | | |
| Neighbour cell | | 1, 2 | Cell 2 | | Cell to be identified. |
| RF Channel Number | | 1, 2 | 1: Cell 1 and Cell 2 | | One TDD carrier frequency is used for the NR cells. |
| SMTC configuration | | 1, 2 | SMTC.1 | | |
| A3-Offset | dB | 1, 2 | -6 | | |
| CP length | | 1, 2 | Normal | | |
| Hysteresis | dB | 1, 2 | 0 | | |
| Time To Trigger | s | 1, 2 | 0 | | |
| Filter coefficient | | 1, 2 | 0 | | L3 filtering is not used |
| DRX | | 1, 2 | DRX.1 | DRX.2 | DRX related parameters are defined in Table A.7.6.1.2.1-5 |
| Time offset between Cell 1 and Cell 2 | | 1, 2 | 3 μ s | | Synchronous cells |
| T1 | s | 1, 2 | 5 | | |
| T2 | s | 1, 2 | 10 | 52 | |

Table A.7.6.1.2.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap with DRX

| Parameter | Unit | Config | Cell 1 | | Cell 2 | |
|-------------------------------------|------|--------|------------------------|----|------------------------|----|
| | | | T1 | T2 | T1 | T2 |
| TDD configuration | | 1, 2 | TDDConf.3.1 | | TDDConf.3.1 | |
| Initial BWP configuration | | 1, 2 | DLBWP.0.1 ULBWP.0.1 | | DLBWP.0.1 ULBWP.0.1 | |
| Active DL BWP configuration | | 1, 2 | DLBWP.1.1 | | DLBWP.1.1 | |
| Active UL BWP configuration | | 1, 2 | ULBWP.1.1 | | ULBWP.1.1 | |
| RLM-RS | | 1, 2 | SSB | | SSB | |
| PDSCH RMC configuration | | 1, 2 | SR.3.1 TDD | | N/A | |
| RMSI CORESET RMC configuration | | 1, 2 | CR.3.1 TDD | | CR.3.1 TDD | |
| Dedicated CORESET RMC configuration | | 1, 2 | CCR.3.1 TDD | | CCR.3.1 TDD | |
| TRS configuration | | 1, 2 | TRS.2.1 TDD | | N/A | |
| PDSCH/PDCCH TCI states | | 1, 2 | TCI.State.2 | | N/A | |
| OCNG Patterns | | 1, 2 | OP.1 | | OP.1 | |
| SSB | | 1 | SSB.1 FR2 | | SSB.1 FR2 | |
| | | 2 | SSB.2 FR2 | | SSB.2 FR2 | |
| Propagation Condition | | 1, 2 | AWGN | | | |

Table A.7.6.1.2.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap with DRX

| Parameter | Unit | Config | Cell 1 | | Cell 2 | |
|----------------------------|--|--------|-----------------------------|--------|-----------|--------|
| | | | T1 | T2 | T1 | T2 |
| AoA setup | | 1, 2 | Setup 1 defined in A.3.15.1 | | | |
| \hat{E}_s / I_{ot} | dB | 1, 2 | 4 | -1.46 | -Infinity | -1.46 |
| N_{oc} ^{Note 2} | dBm/15 KHz | 1, 2 | -98 | | | |
| N_{oc} ^{Note 2} | dBm/SCS | 1 | -89 | | | |
| | | 2 | -86 | | | |
| SS-RSRP | dBm/SCS | 1 | -85 | -85 | -Infinity | -85 |
| | | 2 | -82 | -82 | -Infinity | -82 |
| \hat{E}_s / N_{oc} | dB | 1, 2 | 4 | 4 | -Infinity | 4 |
| I_o | dBm/95.04MHz | 1 | -54.56 | -52.21 | -54.56 | -52.21 |
| Note 1: | The resources for uplink transmission are assigned to the UE prior to the start of time period T2. | | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | |
| Note 3: | SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | |

Table A.7.6.1.2.1-5: Void**Table A.7.6.1.2.1-6: Void****A.7.6.1.2.2 Test Requirements**

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 7.2s for a UE supporting power class 1,
- 4.32s for a UE supporting power class 2, 3 and 4

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 51.2s for a UE supporting power class 1,
- 30.72s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCCH.

A.7.6.1.3 SA event triggered reporting test with per-UE gaps under non-DRX**A.7.6.1.3.1 Test purpose and Environment**

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.3.1-1.

Table A.7.6.1.3.1-1: supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations. |

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.3.1-2 ~ 4 below.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.7.6.1.3.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps without DRX

| Parameter | Unit | Config | Value | Comment |
|--|------|--------|----------------------|---|
| Active cell | | 1, 2 | PCell (Cell 1) | |
| Neighbour cell | | 1, 2 | Cell 2 | Cell to be identified. |
| RF Channel Number | | 1, 2 | 1: Cell 1 and Cell 2 | One TDD carrier frequency is used for the NR cells. |
| Gap type | | 1, 2 | Per-UE gaps | |
| Measurement gap repetition periodicity | ms | 1, 2 | 40 | |
| Measurement gap length | ms | 1, 2 | 6 | |
| Measurement gap offset | ms | 1, 2 | 39 | |
| SMTC configuration | | 1, 2 | SMTC.1 | |
| CSI-RS parameters | | 1, 2 | CSI-RS.3.2 TDD | |
| A3-Offset | dB | 1, 2 | -6 | |
| CP length | | 1, 2 | Normal | |
| Hysteresis | dB | 1, 2 | 0 | |
| Time To Trigger | s | 1, 2 | 0 | |
| Filter coefficient | | 1, 2 | 0 | L3 filtering is not used |
| DRX | | 1, 2 | OFF | |
| Time offset between Cell 1 and Cell 2 | | 1, 2 | 3 μ s | Synchronous cells |
| T1 | s | 1, 2 | 5 | |
| T2 | s | 1, 2 | 5 | |

Table A.7.6.1.3.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps without DRX

| Parameter | Unit | Config | Cell 1 | | Cell 2 | |
|-----------|------|--------|--------|----|--------|----|
| | | | T1 | T2 | T1 | T2 |
| | | | | | | |

| | | | | |
|-------------------------------------|--|------|------------------------|------------------------|
| TDD configuration | | 1, 2 | TDDConf.3.1 | TDDConf.3.1 |
| Initial BWP configuration | | 1, 2 | DLBWP.0.1 ULBWP.0.1 | DLBWP.0.1 ULBWP.0.1 |
| Active DL BWP configuration | | 1, 2 | DLBWP.1.2 | DLBWP.1.1 |
| Active UL BWP configuration | | 1, 2 | ULBWP.1.2 | ULBWP.1.1 |
| RLM-RS | | 1, 2 | CSI-RS | SSB |
| PDSCH RMC configuration | | 1, 2 | SR.3.1 TDD | N/A |
| RMSI CORESET RMC configuration | | 1, 2 | CR.3.1 TDD | CR.3.1 TDD |
| Dedicated CORESET RMC configuration | | 1, 2 | CCR.3.1 TDD | CCR.3.1 TDD |
| TRS configuration | | 1, 2 | TRS.2.1 TDD | N/A |
| PDSCH/PDCCH TCI states | | 1, 2 | TCI.State.2 | N/A |
| OCNG Patterns | | 1, 2 | OP.1 | OP.1 |
| SSB | | 1 | SSB.1 FR2 | SSB.1 FR2 |
| | | 2 | SSB.2 FR2 | SSB.2 FR2 |
| Propagation Condition | | 1, 2 | AWGN | |

Table A.7.6.1.3.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps without DRX

| Parameter | Unit | Config | Cell 1 | | Cell 2 | |
|---|--------------|--------|-----------------------------|-----|-----------|-----|
| | | | T1 | T2 | T1 | T2 |
| AoA setup | | 1, 2 | Setup 3 defined in A.3.15.3 | | | |
| | | | AoA1 | | AoA2 | |
| \hat{E}_s / I_{ot} | dB | 1, 2 | 4 | 4 | -Infinity | 8 |
| N_{oc} <small>Note 2</small> | dBm/15 KHz | 1, 2 | -102 | | | |
| N_{oc} <small>Note 2</small> | dBm/SCS | 1 | -93 | | | |
| | | 2 | -90 | | | |
| SS-RSRP | dBm/SCS | 1 | -89 | -89 | -Infinity | -85 |
| | | 2 | -86 | -86 | -Infinity | -82 |
| \hat{E}_s / N_{oc} | dB | 1, 2 | 4 | 4 | -Infinity | 8 |
| I_o | dBm/95.04MHz | 1, 2 | -58.56 | | -55.38 | |
| <p>Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | |

A.7.6.1.3.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 3.2s for a UE supporting power class 1,
- 1.92s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.1.4 SA event triggered reporting test with per-UE gaps under DRX

A.7.6.1.4.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.4.1-1.

Table A.7.6.1.4.1-1: supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations. |

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.4.1-2, A.7.6.1.4.1-3 and A.7.6.1.4.1-4 below.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.1.4.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps with DRX

| Parameter | Unit | Config | Value | | Comment |
|-----------|------|--------|--------|--------|---------|
| | | | Test 1 | Test 2 | |

| | | | | | |
|--|----|------|----------------------|-------|---|
| Active cell | | 1, 2 | PCell (Cell 1) | | |
| Neighbour cell | | 1, 2 | Cell 2 | | Cell to be identified. |
| RF Channel Number | | 1, 2 | 1: Cell 1 and Cell 2 | | One TDD carrier frequency is used for the NR cells. |
| Gap type | | 1, 2 | Per-UE gaps | | |
| Measurement gap repetition periodicity | ms | 1, 2 | 40 | | |
| Measurement gap length | ms | 1, 2 | 6 | | |
| Measurement gap offset | ms | 1, 2 | 39 | | |
| SMTC configuration | | 1, 2 | SMTC.1 | | |
| CSI-RS parameters | | 1, 2 | CSI-RS.3.2 TDD | | |
| A3-Offset | dB | 1, 2 | -6 | | |
| CP length | | 1, 2 | Normal | | |
| Hysteresis | dB | 1, 2 | 0 | | |
| Time To Trigger | s | 1, 2 | 0 | | |
| Filter coefficient | | 1, 2 | 0 | | L3 filtering is not used |
| DRX | | 1, 2 | DRX.1 | DRX.2 | DRX related parameters are defined in Table A.7.6.1.2.1-5 |
| Time offset between Cell 1 and Cell 2 | | 1, 2 | 3 μ s | | Synchronous cells |
| T1 | s | 1, 2 | 5 | | |
| T2 | s | 1, 2 | 10 | 52 | |

Table A.7.6.1.4.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps with DRX

| Parameter | Unit | Config | Cell 1 | | Cell 2 | |
|-------------------------------------|------|--------|------------------------|----|------------------------|----|
| | | | T1 | T2 | T1 | T2 |
| TDD configuration | | 1, 2 | TDDConf.3.1 | | TDDConf.3.1 | |
| Initial BWP configuration | | 1, 2 | DLBWP.0.1 ULBWP.0.1 | | DLBWP.0.1 ULBWP.0.1 | |
| Active DL BWP configuration | | 1, 2 | DLBWP.1.2 | | DLBWP.1.1 | |
| Active UL BWP configuration | | 1, 2 | ULBWP.1.2 | | ULBWP.1.1 | |
| RLM-RS | | 1, 2 | SCSI-RS | | SSB | |
| PDSCH RMC configuration | | 1, 2 | SR.3.1 TDD | | N/A | |
| RMSI CORESET RMC configuration | | 1, 2 | CR.3.1 TDD | | CR.3.1 TDD | |
| Dedicated CORESET RMC configuration | | 1, 2 | CCR.3.1 TDD | | CCR.3.1 TDD | |
| TRS configuration | | 1, 2 | TRS.2.1 TDD | | N/A | |
| TCI state | | 1, 2 | CSI-RS.Config.0 | | N/A | |
| OCNG Patterns | | 1, 2 | OP.1 | | OP.1 | |
| SSB | | 1 | SSB.1 FR2 | | SSB.1 FR2 | |
| | | 2 | SSB.2 FR2 | | SSB.2 FR2 | |
| Propagation Condition | | 1, 2 | AWGN | | | |

Table A.7.6.1.4.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps with DRX

| Parameter | Unit | Config | Cell 1 | | Cell 2 | |
|--------------------|--|--------|-----------------------------|--------|-----------|--------|
| | | | T1 | T2 | T1 | T2 |
| AoA setup | | 1, 2 | Setup 1 defined in A.3.15.1 | | | |
| \hat{E}_s/I_{ot} | dB | 1, 2 | 4 | -1.46 | -Infinity | -1.46 |
| N_{oc} Note 2 | dBm/15 KHz | 1, 2 | -98 | | | |
| N_{oc} Note 2 | dBm/SCS | 1 | -89 | | | |
| | | 2 | -86 | | | |
| SS-RSRP | dBm/SCS | 1 | -85 | -85 | -Infinity | -85 |
| | | 2 | -82 | -82 | -Infinity | -82 |
| \hat{E}_s/N_{oc} | dB | 1, 2 | 4 | 4 | -Infinity | 4 |
| I_o | dBm/95.04MHz | 1 | -54.56 | -52.21 | -54.56 | -52.21 |
| Note 1: | The resources for uplink transmission are assigned to the UE prior to the start of time period T2. | | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | |
| Note 3: | SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | |

Table A.7.6.1.4.1-5: Void**Table A.7.6.1.4.1-6: Void**

A.7.6.1.4.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 7.2s for a UE supporting power class 1,
- 4.32s for a UE supporting power class 2, 3 and 4

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 51.2s for a UE supporting power class 1,
- 30.72s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCC}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCC.

A.7.6.2 Inter-frequency Measurements

A.7.6.2.1 SA event triggered reporting tests For FR2 without SSB time index detection when DRX is not used (PCell in FR2)

A.7.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.1.1-1, A.7.6.2.1.1-2, and A.7.6.2.1.1-3.

Measurement gap pattern configuration # 13 as defined in Table A.7.6.2.1.1-2 is provided for UE that does not support per-FR gap and for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.1.1-1.

Table A.7.6.2.1.1-1 SA event triggered reporting tests without SSB index reading for FR2-FR2

| Config | Description |
|---------------|---|
| 1 | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note 1: | Void. |

Table A.7.6.2.1.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

| Parameter | Unit | Test configuration | Value | Comment |
|---|------|--------------------|-------------------------------|---|
| NR RF Channel Number | | Config 1 | 1, 2 | Two FR2 NR carrier frequencies is used. |
| Active cell | | Config 1 | NR cell 1 (Pcell) | NR Cell 1 is on NR RF channel number 1. |
| Neighbour cell | | Config 1 | NR cell 2 | NR cell 2 is on NR RF channel number 2. |
| Gap Pattern Id | | Config 1 | 13 | As specified in clause 9.1.2-1. |
| Measurement gap offset | | Config 1 | 39 | |
| SMTC-SSB parameters | | Config 1 | SSB.3 FR2 | As specified in clause A.3.10.2 |
| A3-Offset | dB | Config 1 | -30 | |
| Hysteresis | dB | Config 1 | 0 | |
| CP length | | Config 1 | Normal | |
| TimeToTrigger | s | Config 1 | 0 | |
| Filter coefficient | | Config 1 | 0 | L3 filtering is not used |
| DRX | | Config 1 | OFF | DRX is not used |
| Time offset between serving and neighbour cells | | Config 1 | 3 μ s | Synchronous cells. |
| T1 | s | Config 1 | 5 | |
| T2 | s | Config 1 | 5.2 for PC1; 3.5 for other PC | |

Table A.7.6.2.1.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

| Parameter | | Unit | Test configuration | Cell 1 | | Cell 1 | |
|--|-----------------------------|----------|--------------------|---------------------------------------|-----------|-----------------------------|----|
| | | | | T1 | T2 | T1 | T2 |
| AoA setup | | | Config 1 | Setup 3 as specified in clause A.3.15 | | | |
| | | | | AoA1 | | AoA2 | |
| NR RF Channel Number | | | Config 1 | 1 | | 2 | |
| Duplex mode | | | Config 1 | TDD | | TDD | |
| TDD configuration | | | Config 1 | TDDConf.3.1 | | TDDConf.3.1 | |
| BW _{channel} | | MHz | Config 1 | 100: N _{RB,c} = 66 | | 100: N _{RB,c} = 66 | |
| BWP BW | | MHz | Config 1 | 100: N _{RB,c} = 66 | | 100: N _{RB,c} = 66 | |
| BWP configuration | Initial DL BWP | | Config 1 | DLBWP.0.1 | | N/A | |
| | Initial UL BWP | | | ULBWP.0.1 | | N/A | |
| | Dedicated DL BWP | | | DLBWP.1.1 | | N/A | |
| | Dedicated UL BWP | | | ULBWP.1.1 | | N/A | |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | | Config 1 | OP.1 | | OP.1 | |
| PDSCH Reference measurement channel | | | Config 1 | SR.3.1 TDD | | - | |
| CORESET Reference Channel | | | Config 1 | CR.3.1 TDD | | - | |
| SMTTC configuration defined in A.3.11.1 and A.3.11.2 | | | Config 1 | SMTTC.1 | | SMTTC.1 | |
| PDSCH/PDCCH subcarrier spacing | | kHz | Config 1 | 120 | | 120 | |
| TRS configuration | | | Config 1 | TRS.2.1 TDD | | N/A | |
| TCI configuration | | | Config 1 | CSI-RS.Config.0 | | N/A | |
| EPRE ratio of PSS to SSS | | | Config 1 | 0 | | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | | |
| N_{oc} ^{Note2} | dBm/15 kHz ^{Note5} | | N/A | | N/A | | |
| N_{oc} ^{Note2} | dBm/S CS ^{Note4} | Config 1 | N/A | | N/A | | |
| SS-RSRP ^{Note 3} | dBm/S CS ^{Note5} | Config 1 | -87 | -87 | -Infinity | -87 | |
| \hat{E}_s/I_{ot} | dB | Config 1 | N/A | N/A | -Infinity | N/A | |

| | | | | | | |
|------------------------|--|----------|--------|--------|-----------|--------|
| \hat{E}_s/N_{oc} | dB | Config 1 | N/A | N/A | -Infinity | N/A |
| I_o ^{Note3} | dBm/95 .04 MHz Note5 | Config 1 | -58.01 | -58.01 | -Infinity | -58.01 |
| Propagation Condition | | Config 1 | AWGN | | | |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | |
| Note 3: | SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | |
| Note 4: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | | | |
| Note 5: | Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone | | | | | |
| Note 6: | As observed with 0 dBi gain antenna at the centre of the quiet zone | | | | | |

A.7.6.2.1.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

5120 for UE supporting power class 1, or

3200 for UE supporting other power class.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCC}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCC.

A.7.6.2.2 SA event triggered reporting tests For FR2 without SSB time index detection when DRX is used (PCell in FR2)

A.7.6.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.2.1-1, A.7.6.2.2.1-2, and A.7.6.2.2.1-3.

In test 1&2 measurement gap pattern configuration # 13 as defined in Table A.7.6.2.2.1-2 is provided for UE that does not support per-FR gap and for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.2.1-1.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.2.2.1-1: SA event triggered reporting tests without SSB index reading for FR2-FR2

| Config | Description |
|---------------|---|
| 1 | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note 1: Void. | |

Table A.7.6.2.2.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

| Parameter | Unit | Test configuration | Value | | Comment |
|---|------|--------------------|------------------------------|--------------------------------|---|
| | | | Test 1 | Test 2 | |
| NR RF Channel Number | | Config 1 | 1, 2 | | Two FR2 NR carrier frequencies is used. |
| Active cell | | Config 1 | NR cell 1 (Pcell) | | NR Cell 1 is on NR RF channel number 1. |
| Neighbour cell | | Config 1 | NR cell 2 | | NR cell 2 is on NR RF channel number 2. |
| Gap Pattern Id | | Config 1 | 13 | | As specified in clause 9.1.2-1. |
| Measurement gap offset | | Config 1 | 39 | | |
| SMTC-SSB parameters | | Config 1 | SSB.3 FR2 | | As specified in clause A.3.10.2 |
| A3-Offset | dB | Config 1 | -6 | | |
| Hysteresis | dB | Config 1 | 0 | | |
| CP length | | Config 1 | Normal | | |
| TimeToTrigger | s | Config 1 | 0 | | |
| Filter coefficient | | Config 1 | 0 | | L3 filtering is not used |
| DRX | | Config 1 | DRX.1 | DRX.2 | As specified in clause A.3.3 |
| Time offset between serving and neighbour cells | | Config 1 | 3μs | | Synchronous cells. |
| T1 | s | Config 1 | 5 | | |
| T2 | s | Config 1 | 8 for PC1; 5 for other PC | 82 for PC1; 52 for other PC | |

Table A.7.6.2.2.1-3: Cell specific test parameters for CA inter-frequency event triggered reporting without SSB time index detection

| Parameter | | Unit | Test configuration | Cell 1 | | Cell 2 | |
|-----------------------|----------------|------|--------------------|---------------------------------------|----|-----------------------------|----|
| | | | | T1 | T2 | T1 | T2 |
| AoA setup | | | Config 1 | Setup 1 as specified in clause A.3.15 | | | |
| NR RF Channel Number | | | Config 1 | 1 | | 2 | |
| TDD configuration | | | Config 1 | TDDConf.3.1 | | TDDConf.3.1 | |
| Duplex mode | | | Config 1 | TDD | | TDD | |
| BW _{channel} | | MHz | Config 1 | 100: N _{RB,c} = 66 | | 100: N _{RB,c} = 66 | |
| BWP BW | | MHz | Config 1 | 100: N _{RB,c} = 66 | | 100: N _{RB,c} = 66 | |
| BWP configuration | Initial DL BWP | | Config 1 | DLBWP.0.1 | | N/A | |

| | | | | | | |
|---|----------------------|----------|----------|-----------------|-----------|-------|
| | Initial UL BWP | | | ULBWP.0.1 | N/A | |
| | Dedicated DL BWP | | | DLBWP.1.1 | N/A | |
| | Dedicated UL BWP | | | ULBWP.1.1 | N/A | |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | | Config 1 | OP.1 | OP.1 | |
| PDSCH Reference measurement channel | | | Config 1 | SR.3.1 TDD | - | |
| CORESET Reference Channel | | | Config 1 | CR.3.1 TDD | - | |
| SMTC configuration defined in A.3.11.1 and A.3.11.2 | | | Config 1 | SMTC.1 | SMTC.1 | |
| PDSCH/PDCCH subcarrier spacing | | kHz | Config 1 | 120 | 120 | |
| TRS configuration | | | Config 1 | TRS.2.1 TDD | N/A | |
| TCI configuration | | | Config 1 | CSI-RS.Config.0 | N/A | |
| EPRE ratio of PSS to SSS | | | Config 1 | 0 | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | |
| N_{oc} Note2 | dBm/15 kHz Note5 | | | -104.7 | -104.7 | |
| N_{oc} Note2 | dBm/S CS Note4 | Config 1 | | -95.7 | -95.7 | |
| SS-RSRP Note 3 | dBm/S CS Note5 | Config 1 | -89.7 | -89.7 | -Infinity | -86.7 |
| \hat{E}_s/I_{ot} | dB | Config 1 | 6 | 6 | -Infinity | 9 |
| \hat{E}_s/N_{oc} | dB | Config 1 | 6 | 6 | -Infinity | 9 |
| I_o Note3 | dBm/95 .04 MHz Note5 | Config 1 | -59.7 | -59.7 | -66.7 | -57.2 |
| Propagation Condition | | | Config 1 | AWGN | | |

| | |
|---------|--|
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. |
| Note 3: | SS-RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves. |
| Note 4: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. |
| Note 5: | Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone |
| Note 6: | As observed with 0 dBi gain antenna at the centre of the quiet zone |

A.7.6.2.2.2 Test Requirements

In test 1 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $X1$ ms from the beginning of time period $T2$, where $X1$ is

7680 for UE supporting power class 1, or

4800 for UE supporting other power class.

In test 2 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $X2$ ms from the beginning of time period $T2$, where $X2$ is

81920 for UE supporting power class 1, or

51200 for UE supporting other power class.

In test 1 and 2 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCC}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCC.

A.7.6.2.3 SA event triggered reporting tests For FR2 with SSB time index detection when DRX is not used (PCell in FR2)

A.7.6.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.3.1-1, A.7.6.2.3.1-2, and A.7.6.2.3.1-3.

Measurement gap pattern configuration # 13 as defined in Table A.7.6.2.3.1-2 is provided for UE that does not support per-FR gap and for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of $T1$, and $T2$ respectively. During time duration $T1$, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.3.1-1.

Table A.7.6.2.3.1-1: SA event triggered reporting tests with SSB index reading for FR2-FR2

| Config | Description |
|---------------|---|
| 1 | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note 1: Void. | |

Table A.7.6.2.3.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

| Parameter | Unit | Test configuration | Value | Comment |
|---|------|--------------------|-----------------------------|---|
| NR RF Channel Number | | Config 1 | 1, 2 | Two FR2 NR carrier frequencies is used. |
| Active cell | | Config 1 | NR cell 1 (Pcell) | NR Cell 1 is on NR RF channel number 1. |
| Neighbour cell | | Config 1 | NR cell 2 | NR cell 2 is on NR RF channel number 2. |
| Gap Pattern Id | | Config 1 | 13 | As specified in clause 9.1.2-1. |
| Measurement gap offset | | Config 1 | 39 | |
| SMTC-SSB parameters | | Config 1 | SSB.3 FR2 | As specified in clause A.3.10.2 |
| A3-Offset | dB | Config 1 | -30 | |
| Hysteresis | dB | Config 1 | 0 | |
| CP length | | Config 1 | Normal | |
| TimeToTrigger | s | Config 1 | 0 | |
| Filter coefficient | | Config 1 | 0 | L3 filtering is not used |
| DRX | | Config 1 | OFF | DRX is not used |
| Time offset between serving and neighbour cells | | Config 1 | 3 μ s | Synchronous cells. |
| T1 | s | Config 1 | 5 | |
| T2 | s | Config 1 | 7 for PC1; 4.5 for other PC | |

Table A.7.6.2.3.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

| Parameter | | Unit | Test configuration | Cell 1 | | Cell 2 | |
|---|---------------------|----------|--------------------|---------------------------------------|-----------|-----------------------------|----|
| | | | | T1 | T2 | T1 | T2 |
| AoA setup | | | Config 1 | Setup 3 as specified in clause A.3.15 | | | |
| | | | | AoA1 | | AoA2 | |
| NR RF Channel Number | | | Config 1 | 1 | | 2 | |
| Duplex mode | | | Config 1 | TDD | | TDD | |
| TDD configuration | | | Config 1 | TDDConf.3.1 | | TDDConf.3.1 | |
| BW _{channel} | | MHz | Config 1 | 100: N _{RB,c} = 66 | | 100: N _{RB,c} = 66 | |
| BWP BW | | MHz | Config 1 | 100: N _{RB,c} = 66 | | 100: N _{RB,c} = 66 | |
| BWP configuration | Initial DL BWP | | Config 1 | DLBWP.0.1 | | N/A | |
| | Initial UL BWP | | | ULBWP.0.1 | | N/A | |
| | Dedicated DL BWP | | | DLBWP.1.1 | | N/A | |
| | Dedicated UL BWP | | | ULBWP.1.1 | | N/A | |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | | Config 1 | OP.1 | | OP.1 | |
| PDSCH Reference measurement channel | | | Config 1 | SR.3.1 TDD | | - | |
| CORESET Reference Channel | | | Config 1 | CR.3.1 TDD | | - | |
| SMTC configuration defined in A.3.11.1 and A.3.11.2 | | | Config 1 | SMTC.1 | | SMTC.1 | |
| PDSCH/PDCCH subcarrier spacing | | kHz | Config 1 | 120 | | 120 | |
| TRS configuration | | | Config 1 | TRS.2.1 TDD | | N/A | |
| TCI configuration | | | Config 1 | CSI-RS.Config.0 | | N/A | |
| EPRE ratio of PSS to SSS | | | Config 1 | 0 | | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | | |
| N_{oc} ^{Note2} | dBm/15 kHz Note5 | | N/A | | N/A | | |
| N_{oc} ^{Note2} | dBm/S CS Note4 | Config 1 | N/A | | N/A | | |
| SS-RSRP ^{Note 3} | dBm/S CS Note5 | Config 1 | -87 | -87 | -Infinity | -87 | |
| \hat{E}_s/I_{ot} | dB | Config 1 | N/A | N/A | N/A | N/A | |

| | | | | | | |
|------------------------|--|----------|--------|--------|-----------|--------|
| \hat{E}_s/N_{oc} | dB | Config 1 | N/A | N/A | N/A | N/A |
| I_o ^{Note3} | dBm/95 .04 MHz Note5 | Config 1 | -58.01 | -58.01 | -Infinity | -58.01 |
| Propagation Condition | | Config 1 | AWGN | | | |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | |
| Note 3: | SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | |
| Note 4: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | | | |
| Note 5: | Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone | | | | | |
| Note 6: | As observed with 0 dBi gain antenna at the centre of the quiet zone | | | | | |

A.7.6.2.3.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

6720 for UE supporting power class 1, or

4160 for UE supporting other power class.

The UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCCH.

A.7.6.2.4 SA event triggered reporting tests For FR2 with SSB time index detection when DRX is used (PCell in FR2)

A.7.6.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.4.1-1, A.7.6.2.4.1-2, and A.7.6.2.4.1-3.

In test 1&2 measurement gap pattern configuration # 13 as defined in Table A.7.6.2.4.1-2 is provided for UE that does not support per-FR gap and for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.4.1-1.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.2.4.1-1: SA event triggered reporting tests with SSB index reading for FR2-FR2

| Config | Description |
|---------------|---|
| 1 | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note 1: Void. | |

Table A.7.6.2.4.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

| Parameter | Unit | Test configuration | Value | | Comment |
|---|------|--------------------|---------------------------------|---------------------------------|---|
| | | | Test 1 | Test 2 | |
| NR RF Channel Number | | Config 1 | 1, 2 | | Two FR2 NR carrier frequencies is used. |
| Active cell | | Config 1 | NR cell 1 (Pcell) | | NR Cell 1 is on NR RF channel number 1. |
| Neighbour cell | | Config 1 | NR cell 2 | | NR cell 2 is on NR RF channel number 2. |
| Gap Pattern Id | | Config 1 | 13 | | As specified in clause 9.1.2-1. |
| Measurement gap offset | | Config 1 | 39 | | |
| SMTC-SSB parameters | | Config 1 | SSB.3 FR2 | | As specified in clause A.3.10.2 |
| A3-Offset | dB | Config 1 | -6 | | |
| Hysteresis | dB | Config 1 | 0 | | |
| CP length | | Config 1 | Normal | | |
| TimeToTrigger | s | Config 1 | 0 | | |
| Filter coefficient | | Config 1 | 0 | | L3 filtering is not used |
| DRX | | Config 1 | DRX.1 | DRX.2 | As specified in clause A.3.3 |
| Time offset between serving and neighbour cells | | Config 1 | 3µs | | Synchronous cells. |
| T1 | s | Config 1 | 5 | | |
| T2 | s | Config 1 | 11 for PC1; 6.5 for other PC | 108 for PC1; 67 for other PC | |

Table A.7.6.2.4.1-3: Cell specific test parameters for CA inter-frequency event triggered reporting with SSB time index detection

| Parameter | | Unit | Test configuration | Cell 1 | | Cell 2 | |
|-----------------------|------------------|------|--------------------|---------------------------------------|----|-----------------------------|----|
| | | | | T1 | T2 | T1 | T2 |
| AoA setup | | | Config 1 | Setup 1 as specified in clause A.3.15 | | | |
| NR RF Channel Number | | | Config 1 | 1 | | 2 | |
| Duplex mode | | | Config 1 | TDD | | TDD | |
| TDD configuration | | | Config 1 | TDDConf.3.1 | | TDDConf.3.1 | |
| BW _{channel} | | MHz | Config 1 | 100: N _{RB,c} = 66 | | 100: N _{RB,c} = 66 | |
| BWP BW | | MHz | Config 1 | 100: N _{RB,c} = 66 | | 100: N _{RB,c} = 66 | |
| BWP configuration | Initial DL BWP | | Config 1 | DLBWP.0.1 | | N/A | |
| | Initial UL BWP | | | ULBWP.0.1 | | N/A | |
| | Dedicated DL BWP | | | DLBWP.1.1 | | N/A | |
| | Dedicated UL BWP | | | ULBWP.1.1 | | N/A | |

| | | | | | | |
|--|-------------------------|----------|-----------------|-------|-----------|-------|
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | Config 1 | OP.1 | | OP.1 | |
| PDSCH Reference measurement channel | | Config 1 | SR.3.1 TDD | | - | |
| CORESET Reference Channel | | Config 1 | CR.3.1 TDD | | - | |
| SMTC configuration defined in A.3.11.1 and A.3.11.2 | | Config 1 | SMTC.1 | | SMTC.1 | |
| PDSCH/PDCCH subcarrier spacing | kHz | Config 1 | 120 | | 120 | |
| TRS configuration | | Config 1 | TRS.2.1 TDD | | N/A | |
| TCI configuration | | Config 1 | CSI-RS.Config.0 | | N/A | |
| EPRE ratio of PSS to SSS | | Config 1 | 0 | 0 | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | |
| N_{oc} ^{Note2} | dBm/15 kHz Note5 | | | | | |
| N_{oc} ^{Note2} | dBm/S CS Note4 | Config 1 | -95.7 | | -95.7 | |
| SS-RSRP ^{Note 3} | dBm/S CS Note5 | Config 1 | -89.7 | -89.7 | -Infinity | -86.7 |
| \hat{E}_s / I_{ot} | dB | Config 1 | 6 | 6 | -Infinity | 9 |
| \hat{E}_s / N_{oc} | dB | Config 1 | 6 | 6 | -Infinity | 9 |
| I_o ^{Note3} | dBm/95 .04 MHz Note5 | Config 1 | -59.7 | -59.7 | -66.7 | -57.2 |
| Propagation Condition | | Config 1 | AWGN | | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone</p> <p>Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone</p> | | | | | | |

A.7.6.2.4.2 Test Requirements

In test 1 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

10080 for UE supporting power class 1, or

6240 for UE supporting other power class.

In test 2 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

107520 for UE supporting power class 1, or

66560 for UE supporting other power class.

In test 1 and 2 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCCH.

A.7.6.2.5 SA event triggered reporting tests for FR2 without SSB time index detection when DRX is not used (PCell in FR1)

A.7.6.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 2 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.5.1-1, A.7.6.2.5.1-2, and A.7.6.2.5.1-3.

In test 1 per-UE measurement gap pattern configuration # 0 as defined in Table A.7.6.2.5.1-2 is provided for a UE that does not support per-FR gap and in test 2 no gap pattern is configured as defined in Table A.7.6.2.5.1-2. If the UE supports per-FR gap, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

Supported test configurations are shown in table A.7.6.2.5.1-1.

Table A.7.6.2.5.1-1 SA event triggered reporting tests without SSB index reading for FR1-FR2

| Config | Description of serving cell | Description of target cell |
|--------|--|---|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | |
| 3 | NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | |
| Note: | The UE is only required to be tested in one of the supported test configurations | |

Table A.7.6.2.5.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

| Parameter | Unit | Test configuration | Value | | Comment |
|---|------|--------------------|----------------------------------|---------------------------|---|
| | | | Test 1 | Test 2 | |
| NR RF Channel Number | | Config 1,2,3 | 1, 2 | | Two NR carrier frequencies is used. |
| Active cell | | Config 1,2,3 | NR cell 1 (Pcell) | | NR Cell 1 is on NR RF channel number 1. |
| Neighbour cell | | Config 1,2,3 | NR cell 2 | | NR cell 2 is on NR RF channel number 2. |
| Gap Pattern Id | | Config 1,2,3 | 0 | Gap not configured | As specified in clause 9.1.2-1. |
| Measurement gap offset | | Config 1,2,3 | 39 | N/A | |
| SMTC-SSB parameters on NR RF Channel 1 | | Config 1 | SSB.1 FR1 | | As specified in clause A.3.10.1 |
| | | Config 2 | SSB.1 FR1 | | As specified in clause A.3.10.1 |
| | | Config 3 | SSB.2 FR1 | | As specified in clause A.3.10.1 |
| SMTC-SSB parameters on NR RF Channel 2 | | Config 1,2,3 | SSB.3 FR2 | | As specified in clause A.3.10.2 |
| <i>offsetMO</i> | dB | Config 1,2,3 | 6 | | |
| Hysteresis | dB | Config 1,2,3 | 0 | | |
| <i>a4-Threshold</i> | dBm | Config 1,2,3 | -120 | | |
| CP length | | Config 1,2,3 | Normal | | |
| TimeToTrigger | s | Config 1,2,3 | 0 | | |
| Filter coefficient | | Config 1,2,3 | 0 | | L3 filtering is not used |
| DRX | | Config 1,2,3 | OFF | | DRX is not used |
| Time offset between serving and neighbour cells | | Config 1 | 3ms | | Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1. |
| | | Config 2,3 | 3μs | | Synchronous cells. |
| T1 | s | Config 1,2,3 | 5 | | |
| T2 | s | Config 1,2,3 | 5.2 for PC1; 3.5 for other PC | 3 for PC1; 2 for other PC | |

Table A.7.6.2.5.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

| Parameter | Unit | Test configuration | Cell 1 | | Cell 2 | |
|-----------------------|------|--------------------|-----------------------------|----|---------------------------------------|----|
| | | | T1 | T2 | T1 | T2 |
| AoA setup | | Config 1,2,3 | N/A | | Setup 1 as specified in clause A.3.15 | |
| NR RF Channel Number | | Config 1,2,3 | 1 | | 2 | |
| Duplex mode | | Config 1 | FDD | | TDD | |
| | | Config 2,3 | TDD | | TDD | |
| TDD configuration | | Config 1 | Not Applicable | | TDDConf.3.1 | |
| | | Config 2 | TDDConf.1.1 | | TDDConf.3.1 | |
| | | Config 3 | TDDConf.2.1 | | TDDConf.3.1 | |
| BW _{channel} | MHz | Config 1 | 10: N _{RB,c} = 52 | | 100: N _{RB,c} = 66 | |
| | | Config 2 | 10: N _{RB,c} = 52 | | 100: N _{RB,c} = 66 | |
| | | Config 3 | 40: N _{RB,c} = 106 | | 100: N _{RB,c} = 66 | |
| BWP BW | MHz | Config 1 | 10: N _{RB,c} = 52 | | 100: N _{RB,c} = 66 | |
| | | Config 2 | 10: N _{RB,c} = 52 | | 100: N _{RB,c} = 66 | |
| | | Config 3 | 40: N _{RB,c} = 106 | | 100: N _{RB,c} = 66 | |

| | | | | | | |
|---|------------------|--------------|------------------------|------------------------------------|-----------|-----|
| BWP configuration | Initial DL BWP | | Config 1,2,3 | DLBWP.0.1 | N/A | |
| | Initial UL BWP | | | ULBWP.0.1 | N/A | |
| | Dedicated DL BWP | | | DLBWP.1.1 | N/A | |
| | Dedicated UL BWP | | | ULBWP.1.1 | N/A | |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | | Config 1,2,3 | OP.1 | OP.1 | |
| PDSCH Reference measurement channel | | | Config 1 | SR.1.1 FDD | - | |
| | | | Config 2 | SR.1.1 TDD | | |
| | | | Config 3 | SR2.1 TDD | | |
| CORESET Reference Channel | | | Config 1 | CR.1.1 FDD | - | |
| | | | Config 2 | CR.1.1 TDD | | |
| | | | Config 3 | CR2.1 TDD | | |
| SMTC configuration defined in A.3.11.1 and A.3.11.2 | | | Config 1 | SMTC.2 | SMTC.2 | |
| | | | Config 2,3 | SMTC.1 | SMTC.1 | |
| PDSCH/PDCCH subcarrier spacing | kHz | | Config 1,2 | 15 | 120 | |
| | | | Config 3 | 30 | 120 | |
| EPRE ratio of PSS to SSS | | | Config 1,2,3 | 0 | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | |
| N_{oc} Note2 | dBm/15 kHz Note5 | | Config 1,2 Config 3 | NA Link only, see clause A.3.7A | NA | |
| N_{oc} Note2 | dBm/S CS Note4 | Config 1,2 | | | NA | |
| | | Config 3 | | | NA | |
| SS-RSRP Note 3 | dBm/S CS Note5 | Config 1,2 | | | -Infinity | -87 |
| | | Config 3 | | | -Infinity | -87 |
| \hat{E}_s/I_{ot} | dB | Config 1,2,3 | | | -Infinity | NA |
| \hat{E}_s/N_{oc} | dB | Config 1,2,3 | | | -Infinity | NA |
| I_o Note3 | dBm/9.36MHz | Config 1,2 | | | - | - |
| | dBm/38.16MHz | Config 3 | | | - | - |

| | | | | | |
|-----------------------|--|--------------|--|-----------|--------|
| | dBm/95 .04 MHz Note5 | Config 1,2,3 | | -Infinity | -58.01 |
| Propagation Condition | | Config 1,2,3 | | AWGN | |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | |
| Note 3: | SS-RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | |
| Note 4: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | | |
| Note 5: | Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone | | | | |
| Note 6: | As observed with 0 dBi gain antenna at the centre of the quiet zone | | | | |

A.7.6.2.5.2 Test Requirements

In test 1, with per-UE, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

5120 for UE supporting power class 1, or

3200 for UE supporting other power class.

In test 2, without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

2560 for UE supporting power class 1, or

1600 for UE supporting other power class.

In test 1 and 2 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.6 SA event triggered reporting tests for FR2 without SSB time index detection when DRX is used (PCell in FR1)

A.7.6.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 2 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.6.1-1, A.7.6.2.6.1-2, and A.7.6.2.6.1-3.

In test 1&2 per-UE measurement gap pattern configuration # 0 as defined in Table A.7.6.2.6.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 no gap pattern is configured as defined in Table A.7.6.2.6.1-2. If a UE supports per-FR gap it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

Supported test configurations are shown in table A.7.6.2.6.1-1.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.2.6.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR2

| Config | Description of serving cell | Description of target cell |
|--|--|----------------------------|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | 120 kHz SSB SCS, |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | 100 MHz bandwidth, TDD |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations | | |

Table A.7.6.2.6.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

| Parameter | Unit | Test configuration | Value | | | | Comment |
|---|------|--------------------|------------------------------|--------------------------------|------------------------------|--------------------------------|---|
| | | | Test 1 | Test 2 | Test 3 | Test 4 | |
| NR RF Channel Number | | Config 1,2,3 | 1, 2 | | | | Two NR carrier frequencies is used. |
| Active cell | | Config 1,2,3 | NR cell 1 (Pcell) | | | | NR Cell 1 is on NR RF channel number 1. |
| Neighbour cell | | Config 1,2,3 | NR cell 2 | | | | NR cell 2 is on NR RF channel number 2. |
| Gap Pattern Id | | Config 1,2,3 | 0 | | Gap not configured | | As specified in clause 9.1.2-1. |
| Measurement gap offset | | Config 1,2,3 | 39 | | N/A | | |
| SMTC-SSB parameters on NR RF Channel 1 | | Config 1 | SSB.1 FR1 | | | | As specified in clause A.3.10.1 |
| | | Config 2 | SSB.1 FR1 | | | | As specified in clause A.3.10.1 |
| | | Config 3 | SSB.2 FR1 | | | | As specified in clause A.3.10.1 |
| SMTC-SSB parameters on NR RF Channel 2 | | Config 1,2,3 | SSB.3 FR2 | | | | As specified in clause A.3.10.2 |
| <i>offsetMO</i> | dB | Config 1,2,3 | 6 | | | | |
| Hysteresis | dB | Config 1,2,3 | 0 | | | | |
| <i>a4-Threshold</i> | dBm | Config 1,2,3 | -120 | | | | |
| CP length | | Config 1,2,3 | Normal | | | | |
| TimeToTrigger | s | Config 1,2,3 | 0 | | | | |
| Filter coefficient | | Config 1,2,3 | 0 | | | | L3 filtering is not used |
| DRX | | Config 1,2,3 | DRX .1 | DRX .2 | DRX .1 | DRX .2 | As specified in clause A.3.3 |
| Time offset between serving and neighbour cells | | Config 1 | 3ms | | | | Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1. |
| | | Config 2,3 | 3μs | | | | Synchronous cells. |
| T1 | s | Config 1,2,3 | 5 | | | | |
| T2 | s | Config 1,2,3 | 8 for PC1; 5 for other PC | 82 for PC1; 52 for other PC | 8 for PC1; 5 for other PC | 82 for PC1; 52 for other PC | |

Table A.7.6.2.6.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

| Parameter | Unit | Test configuration | Cell 1 | | Cell 2 | |
|-----------|------|--------------------|--------|----|--------|----|
| | | | T1 | T2 | T1 | T2 |
| | | | | | | |

| | | | | | |
|---|------------------|------------------|--------------|------------------------------------|---------------------------------------|
| AoA setup | | | Config 1,2,3 | NA | Setup 1 as specified in clause A.3.15 |
| NR RF Channel Number | | | Config 1,2,3 | 1 | 2 |
| Duplex mode | | | Config 1 | FDD | TDD |
| | | | Config 2,3 | TDD | TDD |
| TDD configuration | | | Config 1 | Not Applicable | TDDConf.3.1 |
| | | | Config 2 | TDDConf.1.1 | TDDConf.3.1 |
| | | | Config 3 | TDDConf.2.1 | TDDConf.3.1 |
| BW _{channel} | | MHz | Config 1 | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 |
| | | | Config 2 | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 |
| | | | Config 3 | 40: N _{RB,c} = 106 | 100: N _{RB,c} = 66 |
| BWP BW | | MHz | Config 1 | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 |
| | | | Config 2 | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 |
| | | | Config 3 | 40: N _{RB,c} = 106 | 100: N _{RB,c} = 66 |
| BWP configuration | Initial DL BWP | | Config 1,2,3 | DLBWP.0.1 | N/A |
| | Initial UL BWP | | | ULBWP.0.1 | N/A |
| | Dedicated DL BWP | | | DLBWP.1.1 | N/A |
| | Dedicated UL BWP | | | ULBWP.1.1 | N/A |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | | Config 1,2,3 | OP.1 | OP.1 |
| PDSCH Reference measurement channel | | | Config 1 | SR.1.1 FDD | - |
| | | | Config 2 | SR.1.1 TDD | |
| | | | Config 3 | SR2.1 TDD | |
| CORESET Reference Channel | | | Config 1 | CR.1.1 FDD | - |
| | | | Config 2 | CR.1.1 TDD | |
| | | | Config 3 | CR2.1 TDD | |
| SMTC configuration defined in A.3.11.1 and A.3.11.2 | | | Config 1 | SMTC.2 | SMTC.2 |
| | | | Config 2,3 | SMTC.1 | SMTC.1 |
| PDSCH/PDCCH subcarrier spacing | | kHz | Config 1,2 | 15 | 120 |
| | | | Config 3 | 30 | 120 |
| EPRE ratio of PSS to SSS | | | Config 1,2,3 | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | |
| N_{oc} Note2 | | dBm/15 kHz Note5 | | NA Link only, see clause A.3.7A | -104.7 |
| | | | Config 1,2 | | -95.7 |

| | | | | |
|--|-------------------------------|--------------|--|-----------|
| N_{oc} ^{Note2} | dBm/S CS Note4 | Config 3 | | -95.7 |
| SS-RSRP ^{Note 3} | dBm/S CS Note5 | Config 1,2 | | -Infinity |
| | | Config 3 | | -86.7 |
| \hat{E}_s/I_{ot} | dB | Config 1,2,3 | | -Infinity |
| \hat{E}_s/N_{oc} | dB | Config 1,2,3 | | -Infinity |
| I_o ^{Note3} | dBm/9. 36MHz | Config 1,2 | | - |
| | dBm/38 .16MHz | Config 3 | | - |
| | dBm/95 .04 MHz Note5 | Config 1,2,3 | | -66.7 |
| Propagation Condition | | Config 1,2,3 | | AWGN |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone</p> <p>Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone</p> | | | | |

A.7.6.2.6.2 Test Requirements

In test 1 with per-UE gap and in test 3 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

7680 for UE supporting power class 1, or

4800 for UE supporting other power class.

In test 2 with per-UE gap and in test 4 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

81920 for UE supporting power class 1, or

51200 for UE supporting other power class.

In test 1, 2, 3 and 4 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCCH.

A.7.6.2.7 SA event triggered reporting tests for FR2 with SSB time index detection when DRX is not used (PCell in FR1)

A.7.6.2.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 2 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.7.1-1, A.7.6.2.7.1-2, and A.7.6.2.7.1-3.

In test 1 per-UE measurement gap pattern configuration # 0 as defined in Table A.7.6.2.7.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement no gap pattern is configured as defined in Table A.7.6.2.7.1-2. If the UE supports per-FR gap, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

Supported test configurations are shown in table A.7.6.2.7.1-1.

Table A.7.6.2.7.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR2

| Config | Description of serving cell | Description of target cell |
|--|--|---|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | |
| Note: The UE is only required to be tested in one of the supported test configurations | | |

Table A.7.6.2.7.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

| Parameter | Unit | Test configuration | Value | | Comment |
|---|------|--------------------|--------------------------------|----------------------------------|---|
| | | | Test 1 | Test 2 | |
| NR RF Channel Number | | Config 1,2,3 | 1, 2 | | Two NR carrier frequencies is used. |
| Active cell | | Config 1,2,3 | NR cell 1 (Pcell) | | NR Cell 1 is on NR RF channel number 1. |
| Neighbour cell | | Config 1,2,3 | NR cell 2 | | NR cell 2 is on NR RF channel number 2. |
| Gap Pattern Id | | Config 1,2,3 | 0 | Gap not configured | As specified in clause 9.1.2-1. |
| Measurement gap offset | | Config 1,2,3 | 39 | N/A | |
| SMTC-SSB parameters on NR RF Channel 1 | | Config 1 | SSB.1 FR1 | | As specified in clause A.3.10.1 |
| | | Config 2 | SSB.1 FR1 | | As specified in clause A.3.10.1 |
| | | Config 3 | SSB.2 FR1 | | As specified in clause A.3.10.1 |
| SMTC-SSB parameters on NR RF Channel 2 | | Config 1,2,3 | SSB.3 FR2 | | As specified in clause A.3.10.2 |
| <i>offsetMO</i> | dB | Config 1,2,3 | 6 | | |
| Hysteresis | dB | Config 1,2,3 | 0 | | |
| <i>a4-Threshold</i> | dBm | Config 1,2,3,4,5,6 | -120 | | |
| CP length | | Config 1,2,3 | Normal | | |
| TimeToTrigger | s | Config 1,2,3 | 0 | | |
| Filter coefficient | | Config 1,2,3 | 0 | | L3 filtering is not used |
| DRX | | Config 1,2,3 | OFF | | DRX is not used |
| Time offset between serving and neighbour cells | | Config 1 | 3ms | | Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1. |
| | | Config 2,3 | 3μs | | Synchronous cells. |
| T1 | s | Config 1,2,3 | 5 | | |
| T2 | s | Config 1,2,3 | 7 for PC1; 4.5 for other PC | 3.5 for PC1; 2.5 for other PC | |

Table A.7.6.2.7.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

| Parameter | Unit | Test configuration | Cell 1 | | Cell 2 | |
|-----------------------|------|--------------------|-----------------------------|----|---------------------------------------|----|
| | | | T1 | T2 | T1 | T2 |
| AoA setup | | Config 1,2,3 | NA | | Setup 1 as specified in clause A.3.15 | |
| NR RF Channel Number | | Config 1,2,3 | 1 | | 2 | |
| Duplex mode | | Config 1 | FDD | | TDD | |
| | | Config 2,3 | TDD | | TDD | |
| TDD configuration | | Config 1 | Not Applicable | | TDDConf.3.1 | |
| | | Config 2 | TDDConf.1.1 | | TDDConf.3.1 | |
| | | Config 3 | TDDConf.2.1 | | TDDConf.3.1 | |
| BW _{channel} | MHz | Config 1 | 10: N _{RB,c} = 52 | | 100: N _{RB,c} = 66 | |
| | | Config 2 | 10: N _{RB,c} = 52 | | 100: N _{RB,c} = 66 | |
| | | Config 3 | 40: N _{RB,c} = 106 | | 100: N _{RB,c} = 66 | |
| BWP BW | MHz | Config 1 | 10: N _{RB,c} = 52 | | 100: N _{RB,c} = 66 | |
| | | Config 2 | 10: N _{RB,c} = 52 | | 100: N _{RB,c} = 66 | |

| | | | Config 3 | 40: $N_{RB,c} = 106$ | 100: $N_{RB,c} = 66$ |
|---|---------------------|--------------|------------------------------------|----------------------|----------------------|
| BWP configuration | Initial DL BWP | | Config 1,2,3 | DLBWP.0.1 | N/A |
| | Initial UL BWP | | | ULBWP.0.1 | N/A |
| | Dedicated DL BWP | | | DLBWP.1.1 | N/A |
| | Dedicated UL BWP | | | ULBWP.1.1 | N/A |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | | Config 1,2,3 | OP.1 | OP.1 |
| PDSCH Reference measurement channel | | | Config 1 | SR.1.1 FDD | - |
| | | | Config 2 | SR.1.1 TDD | |
| | | | Config 3 | SR2.1 TDD | |
| CORESET Reference Channel | | | Config 1 | CR.1.1 FDD | - |
| | | | Config 2 | CR.1.1 TDD | |
| | | | Config 3 | CR2.1 TDD | |
| SMTC configuration defined in A.3.11.1 and A.3.11.2 | | | Config 1 | SMTC.2 | SMTC.2 |
| | | | Config 2,3 | SMTC.1 | SMTC.1 |
| PDSCH/PDCCH subcarrier spacing | kHz | | Config 1,2 | 15 | 120 |
| | | | Config 3 | 30 | 120 |
| EPRE ratio of PSS to SSS | | | Config 1,2,3 | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | |
| N_{oc} ^{Note2} | dBm/15 kHz Note5 | | NA Link only, see clause A.3.7A | NA | |
| N_{oc} ^{Note2} | dBm/S CS Note4 | Config 1,2 | | NA | |
| | | Config 3 | | NA | |
| SS-RSRP ^{Note 3} | dBm/S CS Note5 | Config 1,2 | | -Infinity | -87 |
| | | Config 3 | | -Infinity | -87 |
| \hat{E}_s / I_{ot} | dB | Config 1,2,3 | | -Infinity | NA |
| \hat{E}_s / N_{oc} | dB | Config 1,2,3 | | -Infinity | NA |
| I_o ^{Note3} | dBm/9.36MHz | Config 1,2 | | - | - |
| | dBm/38.16MHz | Config 3 | | - | - |

| | | | | | |
|-----------------------|--|--------------|--|----------|--------|
| | dBm/95 .04 MHz Note5 | Config 1,2,3 | | Infinity | -58.01 |
| Propagation Condition | | Config 1,2,3 | | AWGN | |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | |
| Note 3: | SS-RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | |
| Note 4: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | | |
| Note 5: | Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone | | | | |
| Note 6: | As observed with 0 dBi gain antenna at the centre of the quiet zone | | | | |

A.7.6.2.7.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

6720 for UE supporting power class 1, or

4160 for UE supporting other power class.

In test 2 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

3360 for UE supporting power class 1, or

2080 for UE supporting other power class.

In test 1 and 2 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCCH.

A.7.6.2.8 SA event triggered reporting tests for FR2 with SSB time index detection when DRX is used (PCell in FR1)

A.7.6.2.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 2 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.8.1-1, A.7.6.2.8.1-2, and A.7.6.2.8.1-3.

In test 1&2 per-UE measurement gap pattern configuration # 0 as defined in Table A.7.6.2.8.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 measurement no gap pattern is configured as defined in Table A.7.6.2.8.1-2. If a UE supports per-FR gap, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

Supported test configurations are shown in table A.7.6.2.8.1-1.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.2.8.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR2

| Config | Description of serving cell | Description of target cell |
|--|--|-----------------------------------|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | 120 kHz SSB SCS, |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | 100 MHz bandwidth, TDD |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | duplex mode |
| Note: The UE is only required to be tested in one of the supported test configurations | | |

Table A.7.6.2.8.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

| Parameter | Unit | Test configuration | Value | | | | Comment |
|---|------|--------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|---|
| | | | Test 1 | Test 2 | Test 3 | Test 4 | |
| NR RF Channel Number | | Config 1,2,3 | 1, 2 | | | | Two NR carrier frequencies is used. |
| Active cell | | Config 1,2,3 | NR cell 1 (Pcell) | | | | NR Cell 1 is on NR RF channel number 1. |
| Neighbour cell | | Config 1,2,3 | NR cell 2 | | | | NR cell 2 is on NR RF channel number 2. |
| Gap Pattern Id | | Config 1,2,3 | 0 | | Gap not configured | | As specified in clause 9.1.2-1. |
| Measurement gap offset | | Config 1,2,3 | 39 | | N/A | | |
| SMTC-SSB parameters on NR RF Channel 1 | | Config 1 | SSB.1 FR1 | | | | As specified in clause A.3.10.1 |
| | | Config 2 | SSB.1 FR1 | | | | As specified in clause A.3.10.1 |
| | | Config 3 | SSB.2 FR1 | | | | As specified in clause A.3.10.1 |
| SMTC-SSB parameters on NR RF Channel 2 | | Config 1,2,3 | SSB.3 FR2 | | | | As specified in clause A.3.10.2 |
| <i>offsetMO</i> | dB | Config 1,2,3 | 6 | | | | |
| Hysteresis | dB | Config 1,2,3 | 0 | | | | |
| <i>a4-Threshold</i> | dBm | Config 1,2,3 | -120 | | | | |
| CP length | | Config 1,2,3 | Normal | | | | |
| TimeToTrigger | s | Config 1,2,3 | 0 | | | | |
| Filter coefficient | | Config 1,2,3 | 0 | | | | L3 filtering is not used |
| DRX | | Config 1,2,3 | DRX .1 | DRX .2 | DRX .1 | DRX .2 | As specified in clause A.3.3 |
| Time offset between serving and neighbour cells | | Config 1 | 3ms | | | | Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1. |
| | | Config 2,3 | 3μs | | | | Synchronous cells. |
| T1 | s | Config 1,2,3 | 5 | | | | |
| T2 | s | Config 1,2,3 | 11 for PC1; 6.5 for other PCT BD | 108 for PC1; 67 for other PCT BD | 11 for PC1; 6.5 for other PCT BD | 108 for PC1; 67 for other PCT BD | |

Table A.7.6.2.8.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

| Parameter | Unit | Test configuration | Cell 1 | | Cell 2 | |
|----------------------|------|--------------------|----------------|----|---------------------------------------|----|
| | | | T1 | T2 | T1 | T2 |
| AoA setup | | Config 1,2,3 | NA | | Setup 1 as specified in clause A.3.15 | |
| NR RF Channel Number | | Config 1,2,3 | 1 | | 2 | |
| Duplex mode | | Config 1 | FDD | | TDD | |
| | | Config 2,3 | TDD | | TDD | |
| TDD configuration | | Config 1 | Not Applicable | | TDDConf.3.1 | |
| | | Config 2 | TDDConf.1.1 | | TDDConf.3.1 | |

| | | | | | | |
|---|---------------------|--------------|------------------------------------|-----------------------------|-------|--|
| BW _{channel} | MHz | Config 3 | TDDConf.2.1 | TDDConf.3.1 | | |
| | | Config 1 | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 | | |
| | | Config 2 | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 | | |
| BWP BW | MHz | Config 3 | 40: N _{RB,c} = 106 | 100: N _{RB,c} = 66 | | |
| | | Config 1 | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 | | |
| | | Config 2 | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 | | |
| BWP configuration | Initial DL BWP | Config 1,2,3 | DLBWP.0.1 | N/A | | |
| | Initial UL BWP | | ULBWP.0.1 | N/A | | |
| | Dedicated DL BWP | | DLBWP.1.1 | N/A | | |
| | Dedicated UL BWP | | ULBWP.1.1 | N/A | | |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | Config 1,2,3 | OP.1 | OP.1 | | |
| PDSCH Reference measurement channel | | Config 1 | SR.1.1 FDD | - | | |
| | | Config 2 | SR.1.1 TDD | | | |
| | | Config 3 | SR2.1 TDD | | | |
| CORESET Reference Channel | | Config 1 | CR.1.1 FDD | - | | |
| | | Config 2 | CR.1.1 TDD | | | |
| | | Config 3 | CR2.1 TDD | | | |
| SMTC configuration defined in A.3.11.1 and A.3.11.2 | | Config 1 | SMTC.2 | SMTC.2 | | |
| | | Config 2,3 | SMTC.1 | SMTC.1 | | |
| PDSCH/PDCCH subcarrier spacing | | Config 1,2 | 15 | 120 | | |
| | | Config 3 | 30 | 120 | | |
| EPRE ratio of PSS to SSS | | Config 1,2,3 | 0 | 0 | | |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | |
| N_{oc} ^{Note2} | dBm/15 kHz Note5 | | NA Link only, see clause A.3.7A | -104.7 | | |
| N_{oc} ^{Note2} | dBm/S CS Note4 | Config 1,2 | | -95.7 | | |
| | | Config 3 | | -95.7 | | |
| SS-RSRP ^{Note 3} | dBm/S CS Note5 | Config 1,2 | | -Infinity | -86.7 | |
| | | Config 3 | | -Infinity | -86.7 | |
| \hat{E}_s/I_{ot} | dB | Config 1,2,3 | | -Infinity | 9 | |
| \hat{E}_s/N_{oc} | dB | Config 1,2,3 | | -Infinity | 9 | |

| | | | | |
|-----------------------|--|--------------|-------|-------|
| I _o Note3 | dBm/9.36MHz | Config 1,2 | - | - |
| | dBm/38.16MHz | Config 3 | - | - |
| | dBm/95.04 MHz Note5 | Config 1,2,3 | -66.7 | -57.2 |
| Propagation Condition | | Config 1,2,3 | AWGN | |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | |
| Note 3: | SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | |
| Note 4: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | |
| Note 5: | Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone | | | |
| Note 6: | As observed with 0 dBi gain antenna at the centre of the quiet zone | | | |

A.7.6.2.8.2 Test Requirements

In test 1 with per-UE gap and in test 3 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

10080 for UE supporting power class 1, or

6240 for UE supporting other power class.

In test 2 with per-UE gap and in test 4 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

107520 for UE supporting power class 1, or

66560 for UE supporting other power class.

In test 1, 2, 3 and 4 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.3 L1-RSRP measurement for beam reporting

A.7.6.3.1 SSB based L1-RSRP measurement when DRX is not used

A.7.6.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.7.6.3.1.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15

Table A.7.6.3.1.1-1: Applicable NR configurations for FR2 SSB based L1-RSRP test

| Config | Description |
|---------------|--|
| 1 | NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

A.7.6.3.1.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.6.3.1.2-1 and Table A.7.6.3.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.7.6.3.1.2-1: General test parameters

| Parameter | Config | Unit | Value |
|--|--------|------|-----------------------------|
| SSB GSCN | 1~2 | | freq1 |
| Duplex mode | 1~2 | | TDD |
| TDD Configuration | 1~2 | | TDDConf.3.1 |
| BW _{channel} | 1~2 | MHz | 100: N _{RB,c} = 66 |
| PDSCH Reference measurement channel | 1~2 | | SR.3.1 TDD |
| RMSI CORESET Reference Channel | 1~2 | | CR.3.1 TDD |
| Dedicated CORESET Reference Channel | 1~2 | | CCR.3.1 TDD |
| SSB configuration | 1 | | SSB.1 FR2 |
| | 2 | | SSB.2 FR2 |
| OCNG Patterns | 1~2 | | OP.1 |
| Initial BWP Configuration | 1~2 | | DLBWP.0.1 ULBWP.0.1 |
| Dedicated BWP configuration | 1~2 | | DLBWP.1.3 ULBWP.1.3 |
| SMTc configuration | 1~2 | | SMTc.1 |
| TRS Configuration | 1~2 | | TRS.2.1 TDD |
| PDCCH/PDSCH TCI Configuration | 1~2 | | TCI.State.2 |
| DRX configuration | 1~2 | | Off |
| reportConfigType | 1~2 | | periodic |
| reportQuantity | 1~2 | | ssb-index-RSRP |
| Number of reported RS | 1~2 | | 2 |
| L1-RSRP reporting period | 1~2 | slot | 640 |
| T1 | 1~2 | s | 5 |
| T2 | 1~2 | s | 2 |
| Propagation condition | 1~2 | | AWGN |
| EPRE ratio of PSS to SSS | 1~2 | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | 1~2 | | AWGN |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> | | | |

Table A.7.6.3.1.2-2: SSB specific test parameters

| Parameter | Config | Unit | SSB#0 | | SSB#1 | |
|--|--------|--------------|-------------------------------|-------|-----------|-------|
| | | | T1 | T2 | T1 | T2 |
| Angle of arrival configuration | | | Setup 1 according to A.3.15.1 | | | |
| N_{oc} ^{Note2} | 1~2 | dBm/15kHz | -105 | | | |
| N_{oc} ^{Note2} | 1 | dBm/SSB SCS | -96 | | | |
| | 2 | | -93 | | | |
| \hat{E}_s/I_{ot} | 1~2 | dB | 0 | 0 | -Infinity | 9 |
| SSB RSRP ^{Note3} | 1 | dBm/SSB SCS | -96 | -96 | -Infinity | -87 |
| | 2 | | -93 | -93 | -Infinity | -84 |
| I_o ^{Note3} | 1 | dBm/95.04MHz | -67.5 | -67.5 | -71.1 | -60.7 |
| | 2 | | -67.5 | -67.5 | -71.1 | -60.7 |
| \hat{E}_s/N_{oc} | 1~2 | dB | 0 | 0 | -Infinity | 9 |
| <p>Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | |

A.7.6.3.1.3 Test Requirements

The UE shall send L1-RSRP report every 640 slots. No later than X ms plus 640 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1, where X is

- 1680 for UE supporting power class 1
- 1200 for UE supporting power class 2,3 or 4.

The reported L1-RSRP value shall include the Rx antenna gain in the range of [-10 ~ +20] dB.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.3.2 SSB based L1-RSRP measurement when DRX is used

A.7.6.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.7.6.3.2.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15

Table A.7.6.3.2.1-1: Applicable NR configurations for FR2 SSB based L1-RSRP test

| Config | Description |
|---------------|--|
| 1 | NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

A.7.6.3.2.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.6.3.2.2-1 and Table A.7.6.3.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.7.6.3.2.2-1: General test parameters

| Parameter | Config | Unit | Value |
|--|--------|------|-----------------------------|
| SSB GSCN | 1~2 | | freq1 |
| Duplex mode | 1~2 | | TDD |
| TDD Configuration | 1~2 | | TDDConf.3.1 |
| BW _{channel} | 1~2 | MHz | 100: N _{RB,c} = 66 |
| PDSCH Reference measurement channel | 1~2 | | SR.3.1 TDD |
| RMSI CORESET Reference Channel | 1~2 | | CR.3.1 TDD |
| Dedicated CORESET Reference Channel | 1~2 | | CCR.3.1 TDD |
| SSB configuration | 1 | | SSB.1 FR2 |
| | 2 | | SSB.2 FR2 |
| OCNG Patterns | 1~2 | | OP.1 |
| Initial BWP Configuration | 1~2 | | DLBWP.0.1 ULBWP.0.1 |
| Dedicated BWP configuration | 1~2 | | DLBWP.1.3 ULBWP.1.3 |
| SMTc configuration | 1~2 | | SMTc.1 |
| TRS Configuration | 1~2 | | TRS.2.1 TDD |
| PDCCH/PDSCH TCI Configuration | 1~2 | | TCI.State.2 |
| DRX configuration | 1~2 | | DRX.3 |
| reportConfigType | 1~2 | | periodic |
| reportQuantity | 1~2 | | ssb-index-RSRP |
| Number of reported RS | 1~2 | | 2 |
| L1-RSRP reporting period | 1~2 | slot | 640 |
| T1 | 1~2 | s | 5 |
| T2 | 1~2 | s | 3 |
| Propagation condition | 1~2 | | AWGN |
| EPRE ratio of PSS to SSS | 1~2 | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | 1~2 | | AWGN |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> | | | |

Table A.7.6.3.2.2-2: SSB specific test parameters

| Parameter | Config | Unit | SSB#0 | | SSB#1 | |
|--|--------|--------------|-------------------------------|-------|-----------|-------|
| | | | T1 | T2 | T1 | T2 |
| Angle of arrival configuration | | | Setup 1 according to A.3.15.1 | | | |
| N_{oc} ^{Note2} | 1~2 | dBm/15kHz | -105 | | | |
| N_{oc} ^{Note2} | 1 | dBm/SSB SCS | -96 | | | |
| | 2 | | -93 | | | |
| \hat{E}_s/I_{ot} | 1~2 | dB | 0 | 0 | -Infinity | 9 |
| SSB RSRP ^{Note3} | 1 | dBm/SSB SCS | -96 | -96 | -Infinity | -87 |
| | 2 | | -93 | -93 | -Infinity | -84 |
| I_o ^{Note3} | 1 | dBm/95.04MHz | -67.5 | -67.5 | -71.1 | -60.7 |
| | 2 | | -67.5 | -67.5 | -71.1 | -60.7 |
| \hat{E}_s/N_{oc} | 1~2 | dB | 0 | 0 | -Infinity | 9 |
| <p>Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | |

A.7.6.3.2.3 Test Requirements

The UE shall send L1-RSRP report every 640 slots. No later than X ms plus 640 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1, where X is

- 2880 for UE supporting power class 1
- 1920 for UE supporting power class 2,3 or 4.

The reported L1-RSRP value shall include the Rx antenna gain in the range of [-10 ~ +20] dB.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.3.3 CSI-RS based L1-RSRP measurement when DRX is not used

A.7.6.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells in Table A.7.6.3.3.1-1.

Table A.7.6.3.3.1-1: Applicable NR configurations for FR2 CSI-RS based L1-RSRP test

| Config | Description |
|---------------|--|
| 1 | NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

A.7.6.3.3.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.6.3.3.2-1 and Table A.7.6.3.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 480ms from the beginning of the test, the DCI trigger comes in slot 8 of a frame and UE provides the report back based on the reporting configuration as defined in Table A.7.6.3.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.7.6.3.3.2-1: General test parameters

| Parameter | Config | Unit | Value |
|---|--------|------|--|
| SSB GSCN | 1 | | freq1 |
| Duplex mode | 1 | | TDD |
| TDD Configuration | 1 | | TDDConf.3.1 |
| BW_{channel} | 1 | MHz | 100: $N_{RB,c} = 66$ |
| PDSCH Reference measurement channel | 1 | | SR.3.1 TDD |
| RMSI CORESET Reference Channel | 1 | | CR.3.1 TDD |
| Dedicated CORESET Reference Channel | 1 | | CCR.3.1 TDD |
| SSB configuration | 1 | | SSB.1 FR2 |
| CSI-RS configuration | 1 | | CSI-RS.3.3 TDD |
| OCNG Patterns | 1 | | OP.1 |
| Initial BWP Configuration | 1 | | DLBWP.0.1 ULBWP.0.1 |
| Dedicated BWP configuration | 1 | | DLBWP.1.3 ULBWP.1.3 |
| SMTc configuration | 1 | | SMTc.1 |
| TRS Configuration | 1 | | TRS.2.1 TDD |
| PDCCH/PDSCH TCI Configuration | 1 | | TCI.State.2 |
| DRX configuration | 1 | | Off |
| reportConfigType | 1 | | aperiodic |
| reportQuantity | 1 | | cri-RSRP |
| Number of reported RS | 1 | | 2 |
| qcl-Info | 1 | | SSB#0 for resource#0 SSB#1 for resource#1 |
| reportSlotOffsetList | 1 | | 26 |
| Propagation condition | 1 | | AWGN |
| T1 | 1 | s | 5 |
| EPRE ratio of PSS to SSS | 1 | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |

Table A.7.6.3.3.2-1: CSI-RS specific test parameters

| Parameter | Config | Unit | CSI-RS#0 | CSI-RS#1 |
|--------------------------------|--|--------------|-------------------------------|----------|
| Angle of arrival configuration | 1 | | Setup 1 according to A.3.15.1 | |
| N_{oc} ^{Note1} | 1 | dBm/15kHz | -105 | |
| N_{oc} ^{Note1} | 1 | dBm/SSB SCS | -95.97 | |
| \hat{E}_s / I_{ot} | 1 | dB | 0 | 9 |
| CSI-RS RSRP ^{Note2} | 1 | dBm/SSB SCS | -95.97 | -86.97 |
| I_o ^{Note2} | 1 | dBm/95.04MHz | -63.97 | -57.47 |
| \hat{E}_s / N_{oc} | 1 | dB | 0 | 9 |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | |
| Note 3: | CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | |

A.7.6.3.3.3 Test Requirements

After 480ms from the beginning of the test, the UE shall send L1-RSRP report at slot 26 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the accuracy requirements defined in clause 10.1.20.1.

For absolute accuracy of CSI-RS0 and absolute accuracy of CSI-RS1, the UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.7.6.3.3.3-1.

For relative accuracy of CSI-RS0 compared with CSI-RS1, the UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

Table A.7.6.3.3.3-1: L1-RSRP absolute accuracy test requirement

| | Test requirement ^{Notes1,2,3} |
|---------|--|
| CSI-RS0 | $CSI-RS_RP0 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq CSI-RS_RP0 + \delta + G_{max}$ |
| CSI-RS1 | $CSI-RS_RP1 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq CSI-RS_RP1 + \delta + G_{max}$ |
| Note 1: | CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration |
| Note 2: | δ is the RSRP absolute accuracy requirement from Table 10.1.20.2.1-1, selected according to the I_o used in the test |
| Note 3: | G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class |

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.3.4 CSI-RS based L1-RSRP measurement when DRX is used

A.7.6.3.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells in Table A.7.6.3.4.1-1.

Table A.7.6.3.4.1-1: Applicable NR configurations for FR2 CSI-RS based L1-RSRP test

| Config | Description |
|--------|--|
| 1 | NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

A.7.6.3.4.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.6.3.4.2-1 and Table A.7.6.3.4.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 1440ms from the beginning of the test, the DCI trigger comes in slot 8 of a frame and UE provides the report back based on the reporting configuration as defined in Table A.7.6.3.4.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.7.6.3.4.2-1: General test parameters

| Parameter | Config | Unit | Value |
|---|--------|------|--|
| SSB GSCN | 1 | | freq1 |
| Duplex mode | 1 | | TDD |
| TDD Configuration | 1 | | TDDConf.3.1 |
| $BW_{channel}$ | 1 | MHz | 100: $N_{RB,c} = 66$ |
| PDSCH Reference measurement channel | 1 | | SR.3.1 TDD |
| RMSI CORESET Reference Channel | 1 | | CR.3.1 TDD |
| Dedicated CORESET Reference Channel | 1 | | CCR.3.1 TDD |
| SSB configuration | 1 | | SSB.1 FR2 |
| CSI-RS configuration | 1 | | CSI-RS.3.3 TDD |
| OCNG Patterns | 1 | | OP.1 |
| Initial BWP Configuration | 1 | | DLBWP.0.1 ULBWP.0.1 |
| Dedicated BWP configuration | 1 | | DLBWP.1.3 ULBWP.1.3 |
| SMTc configuration | 1 | | SMTc.1 |
| TRS Configuration | 1 | | TRS.2.1 TDD |
| PDCCH/PDSCH TCI Configuration | 1 | | TCI.State.2 |
| DRX configuration | 1 | | DRX.3 |
| reportConfigType | 1 | | aperiodic |
| reportQuantity | 1 | | cri-RSRP |
| Number of reported RS | 1 | | 2 |
| qcl-Info | 1 | | SSB#0 for resource#0 SSB#1 for resource#1 |
| reportSlotOffsetList | 1 | | 26 |
| Propagation condition | 1 | | AWGN |
| T1 | 1 | s | 5 |
| EPRE ratio of PSS to SSS | 1 | dB | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | |
| Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |

Table A.7.6.3.4.2-1: CSI-RS specific test parameters

| Parameter | Config | Unit | CSI-RS#0 | CSI-RS#1 |
|--------------------------------|--|--------------|-------------------------------|----------|
| Angle of arrival configuration | 1 | | Setup 1 according to A.3.15.1 | |
| N_{oc} ^{Note1} | 1 | dBm/15kHz | -105 | |
| N_{oc} ^{Note1} | 1 | dBm/SSB SCS | -95.97 | |
| \hat{E}_s / I_{ot} | 1 | dB | 0 | 9 |
| CSI-RS RSRP ^{Note2} | 1 | dBm/SSB SCS | -95.97 | -86.97 |
| I_o ^{Note2} | 1 | dBm/95.04MHz | -63.97 | -57.47 |
| \hat{E}_s / N_{oc} | 1 | dB | 0 | 9 |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | |
| Note 3: | CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | |

A.7.6.3.4.3 Test Requirements

After 1440ms from the beginning of the test, the UE shall send L1-RSRP report at slot 26 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the accuracy requirements defined in clause 10.1.20.1.

For absolute accuracy of CSI-RS0 and absolute accuracy of CSI-RS1, the UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.7.6.3.4.3-1.

For relative accuracy of CSI-RS0 compared with CSI-RS1, the UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

Table A.7.6.3.4.3-1: L1-RSRP absolute accuracy test requirement

| | Test requirement ^{Notes1,2,3} |
|---------|--|
| CSI-RS0 | $CSI-RS_RP0 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq CSI-RS_RP0 + \delta + G_{max}$ |
| CSI-RS1 | $CSI-RS_RP1 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq CSI-RS_RP1 + \delta + G_{max}$ |
| Note 1: | CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration |
| Note 2: | δ is the RSRP absolute accuracy requirement from Table 10.1.20.2.1-1, selected according to the I_o used in the test |
| Note 3: | G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class |

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.7 Measurement Performance requirements

A.7.7.1 SS-RSRP

A.7.7.1.1 SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.7.7.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.3.1.1 and 10.1.3.1.2 for intra-frequency measurements.

A.7.7.1.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.7.1.1.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in Table A.7.7.1.1.2-2 and A.7.7.1.1.2-3. In all test cases, Cell 1 is the PCell and Cell 2 the target cell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1. The test consists of two time phases T1 and T2.

Table A.7.7.1.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |

Table A.7.7.1.1.2-2: SS-RSRP Intra frequency general test parameters

| Parameter | Unit | T1 | | T2 | |
|-----------|------|--------|--------|--------|--------|
| | | Cell 1 | Cell 2 | Cell 1 | Cell 2 |
| Cell ID | | 489 | 0 | 489 | 0 |

| SSB ARFCN | | freq1 | | freq1 | |
|---|-----|-----------------------------|--------------|-----------------------------|--------------|
| Duplex mode | | TDD | | TDD | |
| TDD configuration | | TDDConf.3.1 | | TDDConf.3.1 | |
| BW _{channel} | MHz | 100: N _{RB,c} = 24 | | 100: N _{RB,c} = 24 | |
| Downlink initial BWP configuration | | DLB WP.0. 1 | - | DLB WP.0. 1 | - |
| Downlink dedicated BWP configuration | | DLB WP.1. 1 | - | DLB WP.1. 1 | - |
| Uplink initial BWP configuration | | ULB WP.0. 1 | - | ULB WP.0. 1 | - |
| Uplink dedicated BWP configuration | | ULB WP.1. 1 | - | ULB WP.1. 1 | - |
| DRX cycle configuration | | Not applicable | - | Not applicable | - |
| TRS configuration | | TRS.2 .1 TDD | - | TRS.2 .1 TDD | - |
| TCI state | | TCI.St ate.0 | - | TCI.St ate.0 | - |
| PDSCH Reference measurement channel | | SR.3. 1 TDD | - | SR.3. 1 TDD | - |
| RMSI CORESET Reference Channel | | CR.3. 1 TDD | - | CR.3. 1 TDD | - |
| Control channel RMC | | CCR. 3.1 TDD | - | CCR. 3.1 TDD | - |
| OCNG Patterns | | OP.3 | OP.3 | OP.3 | OP.3 |
| SSB configuration | | SSB.3 FR2 | SSB.3 FR2 | SSB.3 FR2 | SSB.3 FR2 |
| SMTC configuration | | SMTC .1 | SMTC .1 | SMTC .1 | SMTC .1 |
| Time offset with Cell 1 | μs | - | 3 | - | 3 |
| PDSCH/PDCCH subcarrier spacing | kHz | 120 | 120 | 120 | 120 |
| EPRE ratio of PSS to SSS | | | | | |
| EPRE ratio of PBCH_DMRS to SSS | | | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | | | |
| | dB | 0 | 0 | 0 | 0 |

| | | | | | |
|------------------------|---|----------|----------|----------|----------|
| Propagation conditions | | AWG N | AWG N | AWG N | AWG N |
| Antenna configuration | | 1x2 | 1x2 | 1x2 | 1x2 |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | |
| Note 2: | Void | | | | |
| Note 3: | Void | | | | |
| Note 4: | Void | | | | |
| Note 5: | Void | | | | |

Table A.7.7.1.1.2-3: SS-RSRP Intra frequency OTA related test parameters

| Parameter | Unit | T1 | | T2 | |
|---|---|------------------------------|--------|---|-------------------------------------|
| | | Cell 1 | Cell 2 | Cell 1 | Cell 2 |
| Angle of arrival configuration | | According to clause A.3.15.1 | | | |
| Assumption for UE beams ^{Note 7} | | Rough | | Assumption for UE beams ^{Note 7} | |
| N_{oc} ^{Note1} | dBm/15kHz z ^{Note4} | -91.6 | | N/A | |
| N_{oc} ^{Note1} | dBm/SCS ^{Note4} | -82.6 | | N/A | |
| \hat{E}_s / N_{oc} | dB | 6.0 | 1.0 | N/A | N/A |
| E_s | dBm/SCS ^{Note4} | | | (Table B.2.2-2 Rx Beam Peak +3.1dB) | (Table B.2.2-2 Rx Beam Peak +3.1dB) |
| SSB_RP ^{Note2} | dBm/SCS | -76.6 | -81.6 | (Table B.2.2-2 Rx Beam Peak +3.1dB) | (Table B.2.2-2 Rx Beam Peak +3.1dB) |
| $\hat{E}_s / I_{ot\ BB}$ ^{Note6} | dB | 2.44 | -5.98 | -5.98 | -5.98 |
| I_o ^{Note2} | dBm/95.04 MHz ^{Note4} | -50.05 | | (Table B.2.2-2 Rx Beam Peak +30.70dB) | |
| Note 1: | Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | |
| Note 2: | SSB_RP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | |
| Note 3: | Void | | | | |
| Note 4: | Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone | | | | |
| Note 5: | Void | | | | |
| Note 6: | Calculation of $E_s/I_{ot\ BB}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 2dB for UE multi-band relaxation factor $\sum MB_P$ from TS 38.101-2 [19] Table 6.2.1.3-4. | | | | |
| Note 7: | Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation | | | | |

A.7.7.1.1.3 Test Requirements

The SS-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clauses 10.1.3.1.1 and relative accuracy requirements in clause 10.1.3.1.2. The following requirements are to be verified:

During T1:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in table A.7.7.1.1.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1.3.1.2-1.

During T2:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in table A.7.7.1.1.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1.3.1.2-1.

During T1 and T2:

Relative accuracy of Cell 1 during T2 compared with Cell 1 during T1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1.3.1.2-1.

Relative accuracy of Cell 2 during T2 compared with Cell 2 during T1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1.3.1.2-1.

Table A.7.7.1.1.3-1: SS-RSRP absolute accuracy test requirement

| | Test requirement ^{Notes1,2,3} |
|---------|---|
| Cell 1 | $SSB_RP1 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP1 + \delta + G_{max}$ |
| Cell 2 | $SSB_RP2 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP2 + \delta + G_{max}$ |
| Note 1: | SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration |
| Note 2: | δ is the RSRP absolute accuracy requirement from Table 10.1.3.1.1-1, selected according to the I_o used in the test |
| Note 3: | G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class |

A.7.7.1.2 SA inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.7.7.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.5.1.1 and 10.1.5.1.2 for intrer-frequency measurements with the testing configurations for NR cells in Table A.7.7.1.2.1-1.

Table A.7.7.1.2.1-1: Applicable NR configurations for FR2 inter-frequency SS-RSRP accuracy test

| Configuration | Description |
|---------------|---|
| 1 | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |

A.7.7.1.2.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on a different frequency than the PCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.7.1.2.2-1 and Table A.7.7.1.2.2-2 below. Both absolute and relative accuracy of RSRP inter-frequency measurements are tested by using the parameters in Table A.7.7.1.2.2-1 and Table A.7.7.1.2.2-1. The inter-frequency measurements are supported by a measurement gap.

Table A.7.7.1.2.2-1: SS-RSRP inter-frequency test parameters

| Parameter | Config | Unit | Test 1 | | Test 2 | |
|---|--------|------|--------------------------------|--------|--------------------------------|--------|
| | | | Cell 1 | Cell 2 | Cell 1 | Cell 2 |
| SSB ARFCN | 1~2 | | freq1 | freq2 | freq1 | freq2 |
| BW _{channel} | 1~2 | | 100: N _{RB,c} = 24 | | 100: N _{RB,c} = 24 | |
| Gap pattern ID | | | 0 | | 0 | |
| Duplex mode | 1~2 | | TDD | TDD | TDD | TDD |
| TDD configuration | 1~2 | | TDDConf.3.1 | | TDDConf.3.1 | |
| PDSCH Reference measurement channel | 1~2 | | SR.3.1 TDD | - | SR.3.1 TDD | - |
| RMSI CORESET Reference Channel | 1~2 | | CR.3.1 TDD | - | CR.3.1 TDD | - |
| Dedicated CORESET Reference Channel | 1~2 | | CCR.3.1 TDD | - | CCR.3.1 TDD | - |
| SSB configuration | 1 | | SSB.3 FR2 | | SSB.3 FR2 | |
| | 2 | | SSB.4 FR2 | | SSB.4 FR2 | |
| OCNG Patterns | 1~2 | | OP.3 | | OP.3 | |
| Initial BWP Configuration | 1~2 | | DLBWP.0.1 ULBWP.0.1 | | DLBWP.0.1 ULBWP.0.1 | |
| Dedicated BWP configuration | 1~2 | | DLBWP.1.3 ULBWP.1.3 | | DLBWP.1.3 ULBWP.1.3 | |
| TRS Configuration | 1~2 | | TRS.2.1 TDD | | TRS.2.1 TDD | |
| PDCCH/PDSCH TCI Configuration | 1~2 | | TCI.State.2 | | TCI.State.2 | |
| SMTTC configuration | 1~2 | | SMTTC.1 | | SMTTC.1 | |
| Time offset between Cell 2 and Cell 3 | 1~2 | µs | 3 | | 3 | |
| EPRE ratio of PSS to SSS | 1~2 | dB | 0 | 0 | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | | | | |
| Propagation condition | 1~2 | - | AWGN | AWGN | AWGN | AWGN |
| Antenna configuration | 1~2 | - | 1x2 | 1x2 | 1x2 | 1x2 |

| | |
|---------|---|
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
| Note 2: | Void |

Table A.7.7.1.2.2-2: SS-RSRP inter frequency OTA related test parameters

| Parameter | Unit | Test 1 | | Test 2 | |
|--|--|---|-------------------|---|---------------------------------------|
| | | Cell 1 | Cell 2 | Cell 1 | Cell 2 |
| Angle of arrival configuration | | Setup 4b according to clause A.3.15.4.2 | | Setup 4b according to clause A.3.15.4.2 | |
| | | AoA1 Spherical coverage | AoA2 Rx Beam Peak | AoA1 Spherical coverage | AoA2 Rx Beam Peak |
| Assumption for UE beams ^{Note 7} | | Rough | | Rough | |
| N_{oc} ^{Note1} | dBm/15kHz _{z^{Note4}} | -90.6 | -90.6 | (Table B.2.3-2 Rx Beam Peak +1.97dB) | (Table B.2.3-2 Rx Beam Peak - 3.03dB) |
| N_{oc} ^{Note1} | dBm/SCS _{Note4} | -81.6 | -81.6 | (Table B.2.3-2 Rx Beam Peak +11.0dB) | (Table B.2.3-2 Rx Beam Peak +6.0dB) |
| \hat{E}_s / N_{oc} | dB | 6.0 | 6.0 | 17.0 | -1.0 |
| SSB_RP ^{Note2} | dBm/SCS | -75.60 | -75.60 | (Table B.2.3-2 Rx Beam Peak +28.0dB) | (Table B.2.3-2 Rx Beam Peak +5.0dB) |
| (SSB_RP _{Cell 1} – SSB_RP _{Cell 2}) | dB | 0 | | 23.00 | |
| $\hat{E}_s / I_{ot\ BB}$ ^{Note6} | dB | 5.29 | 5.96 | 8.86 | -3.92 |
| I_{o} ^{Note2} | dBm/95.04 MHz _{Note4} | -50.03 | -50.03 | (Table B.2.3-2 Rx Beam Peak +52.68dB) | (Table B.2.3-2 Rx Beam Peak +33.13dB) |
| ($I_{ofreq 1} - I_{ofreq 2}$) | dB | 0 | | 19.55 | |
| Note 1: | Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | |
| Note 2: | SSB_RP, E_s/I_{ot} , I_o , (SSB_RP _{Cell 2} – SSB_RP _{Cell 1}) and ($I_{ofreq 2} - I_{ofreq 1}$) levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | |
| Note 3: | Void | | | | |
| Note 4: | Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone | | | | |
| Note 5: | Void | | | | |
| Note 6: | Calculation of $E_s/I_{ot\ BB}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 2dB for UE multi-band relaxation factor $\sum MB_P$ or $\sum MB_S$ from TS 38.101-2 [19] Table 6.2.1.3-4. | | | | |
| Note 7: | Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation | | | | |

A.7.7.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 1 and Cell 2 shall fulfil the absolute requirements in clause 10.1.5.1.1 and the relative requirements in clause 10.1.5.1.2.

Test 1:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table A.7.7.1.2.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in A.7.7.1.2.3-2.

Test 2:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table A.7.7.1.2.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in A.7.7.1.2.3-2.

Table A.7.7.1.2.3-1: SS-RSRP absolute accuracy test requirement

| | Test requirement ^{Notes 1,2,3,4} |
|---------|--|
| Cell 1 | $SSB_RP1 - \delta + G_{min} + X \leq \text{Reported RSRP(dBm)} \leq SSB_RP1 + \delta + G_{max}$ |
| Cell 2 | $SSB_RP2 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP2 + \delta + G_{max}$ |
| Note 1: | SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration |
| Note 2: | δ is the RSRP absolute accuracy requirement from Table 10.1.5.1.1-1, selected according to the lo used in the test |
| Note 3: | G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class |
| Note 4: | X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value. |

Table A.7.7.1.2.3-2: SS-RSRP relative accuracy test requirement

| | Test requirement ^{Notes 1,2,3,4} |
|-----------------|--|
| Cell 2 – Cell 1 | $SSB_RP2 - SSB_RP1 - \delta \leq \text{Reported RSRP(dB)} \leq SSB_RP2 - SSB_RP1 + \delta - (X)$ |
| Note 1: | SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration |
| Note 2: | δ is the RSRP relative accuracy requirement from Table 10.1.5.1.2-1 |
| Note 3: | Void |
| Note 4: | X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value. |

A.7.7.1.3 SA inter-frequency measurement accuracy with FR1 serving cell and FR2 target cell

A.7.7.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.5.1.1 for inter-frequency measurements with the testing configurations in Table A.7.7.1.3.1-1.

Table A.7.7.1.3.1-1: Applicable NR configurations for FR2 inter-frequency SS-RSRP accuracy test

| Config | Description of serving cell | Description of target cell |
|--------|---|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode | |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode | |

A.7.7.1.3.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1) in FR1 and Cell 2 in FR2. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.7.1.3.2-1 and Table A.7.7.1.3.2-2 below. Both absolute and relative accuracy of RSRP inter-frequency measurements are tested by using the parameters in Table A.7.7.1.3.2-1 and Table A.7.7.1.3.2-2. The inter-frequency measurements are supported by a measurement gap.

Table A.7.7.1.3.2-1: SS-RSRP inter-frequency test parameters

| Parameter | Config | Unit | Test 1 | | Test 2 | |
|-------------------------------------|--------|------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| | | | Cell 1 | Cell 2 | Cell 1 | Cell 2 |
| SSB ARFCN | 1~3 | | freq1 | freq2 | freq1 | freq2 |
| BW _{channel} | 1 | MHz | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 | 10: N _{RB,c} = 52 | 100: N _{RB,c} = 66 |
| | 2 | | 10: N _{RB,c} = 52 | | 10: N _{RB,c} = 52 | |
| | 3 | | 40: N _{RB,c} = 106 | | 40: N _{RB,c} = 106 | |
| Duplex mode | 1 | | FDD | TDD | FDD | TDD |
| | 2 | | TDD | | TDD | |
| | 3 | | TDD | | TDD | |
| TDD configuration | 1 | | N/A | TDDConf. 3.1 | N/A | TDDConf. 3.1 |
| | 2 | | TDDConf. 1.1 | | TDDConf. 1.1 | |
| | 3 | | TDDConf. 2.1 | | TDDConf. 2.1 | |
| PDSCH Reference measurement channel | 1 | | SR.1.1 FDD | - | SR.1.1 FDD | - |
| | 2 | | SR.1.1 TDD | | SR.1.1 TDD | |
| | 3 | | SR.2.1 FDD | | SR.2.1 FDD | |
| RMSI CORESET Reference Channel | 1 | | CR.1.1 FDD | - | CR.1.1 FDD | - |
| | 2 | | CR.1.1 TDD | | CR.1.1 TDD | |
| | 3 | | CR.2.1 FDD | | CR.2.1 FDD | |
| Dedicated CORESET Reference Channel | 1 | | CCR.1.1 FDD | - | CCR.1.1 FDD | - |
| | 2 | | CCR.1.1 TDD | | CCR.1.1 TDD | |
| | 3 | | CCR.2.1 TDD | | CCR.2.1 TDD | |
| SSB configuration | 1 | | SSB.1 FR1 | SSB.1 FR2 | SSB.1 FR1 | SSB.1 FR2 |
| | 2 | | SSB.1 FR1 | | SSB.1 FR1 | |
| | 3 | | SSB.2 FR1 | | SSB.2 FR1 | |
| OCNG Patterns | 1~3 | | OP.1 | | OP.1 | |
| Initial BWP Configuration | 1~3 | | DLBWP.0.1 ULBWP.0.1 | | DLBWP.0.1 ULBWP.0.1 | |
| Dedicated BWP configuration | 1~3 | | DLBWP.1.3 ULBWP.1.3 | | DLBWP.1.3 ULBWP.1.3 | |
| TRS Configuration | 1~3 | | TRS.2.1 TDD | | TRS.2.1 TDD | |
| PDCCH/PDSCH TCI Configuration | 1~3 | | TCI.State.2 | | TCI.State.2 | |

| | | | | | | |
|---|-----|---------------|------------------------------|------|------------------------------|------|
| SMTC configuration | 1~3 | | SMTC.1 | | SMTC.1 | |
| Time offset between Cell 2 and Cell 3 | 1~3 | μs | 3 | | 3 | |
| EPRE ratio of PSS to SSS | 1~3 | dB | 0 | 0 | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | | | | |
| Propagation condition | 1~3 | - | NA | AWGN | NA | AWGN |
| Antenna configuration | 1~3 | - | Link only, see clause A.3.7A | 1x2 | Link only, see clause A.3.7A | 1x2 |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> | | | | | | |

Table A.7.7.1.3.2-2: SS-RSRP inter-frequency OTA related test parameters

| Parameter | Config | Unit | Test 1 | | Test 2 ^{NOTE 3} | |
|-----------|--------|------|--------|--------|--------------------------|--------|
| | | | Cell 1 | Cell 2 | Cell 1 | Cell 2 |
| | | | | | | |

| | | | | | | |
|--|-----|----------------------|---|----------|---|---------------------------|
| Angle of arrival configuration according to clause A.3.15 | | | NA | Setup 2b | NA | Setup 2b |
| Assumption for UE beams ^{Note 4} | | | N/A | Rough | N/A | Rough |
| N_{oc} | 1~4 | dBm/15 kHz | NA Link only, see clause A.3.7A | TBD | NA Link only, see clause A.3.7A | NA |
| N_{oc} | 1,2 | dBm/SS | | TBD | | NA |
| | 3,4 | B SCS | | TBD | | NA |
| \hat{E}_s / I_{ot} | 1~4 | dB | | TBD | | NA |
| SS-RSRP ^{Note1} | 1,2 | dBm/SC | | TBD | | As in Table B.2.3-2 |
| | 3,4 | S | | TBD | | As in Table B.2.3-2 |
| I_o ^{Note1} | 1~4 | dBm/ 95.04M Hz | | TBD | | SS- RSRP+ 28.98 |
| \hat{E}_s / N_{oc} | 1~4 | dB | TBD | NA | | |
| <p>Note 1: RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 3: No additional noise is added by the test system in Test 2.</p> <p>Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation</p> | | | | | | |

A.7.7.1.3.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 2 shall fulfil the Absolute requirement in clause 10.1.5.1.1.

A.7.7.2 SS-RSRQ

A.7.7.2.1 SA intra-frequency measurement accuracy with FR2 serving cell and FR2 target cell

A.7.7.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.8.1.1.

A.7.7.2.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.7.2.1.2-1. The absolute accuracy of SS-RSRQ intra-frequency measurement is test by using the parameters in Table A.7.7.2.1.2-2 and Table A.7.7.2.1.2-3. In all test cases, Cell 1 is the PCell and Cell 2 the target cell.

Table A.7.7.2.1.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |

Table A.7.7.2.1.2-2: SS-RSRQ Intra frequency test parameters

| Parameter | Unit | Test 1 | | Test 2 | |
|-----------|------|--------|--------|--------|--------|
| | | Cell 1 | Cell 2 | Cell 1 | Cell 2 |

| | | | | | | |
|--|------------------|-----|-----------------------------|--------------|-----------------------------|--------------|
| SSB ARFCN | | | Freq1 | | Freq1 | |
| Duplex mode | | | TDD | | TDD | |
| TDD configuration | | | TDDConf.3.1 | | TDDConf.3.1 | |
| BW _{channel} | | MHz | 100: N _{RB,c} = 66 | | 100: N _{RB,c} = 66 | |
| BWP configuration | Initial DL BWP | | DLBWP.0.1 | | | |
| | Dedicated DL BWP | | DLBWP.1.1 | | | |
| | Initial UL BWP | | ULBWP.0.1 | | | |
| | Dedicated UL BWP | | ULBWP.1.1 | | | |
| TRS configuration | | | TRS.2.1 TDD | | TRS.2.1 TDD | |
| TCI state | | | TCI.State .0 | | TCI.State .0 | |
| PDSCH Reference measurement channel | | | SR.3.1 TDD | | SR.3.1 TDD | |
| RMSI CORESET Reference Channel | | | CR.3.1 TDD | - | CR.3.1 TDD | |
| Control channel RMC | | | CCR.3.1 TDD | - | CCR.3.1 TDD | - |
| OCNG Patterns | | | OP.1 | OP.1 | OP.1 | OP.1 |
| SMTC configuration | | | SMTC.1 | | | |
| SSB configuration | | | SSB.1 FR2 | SSB.1 FR2 | SSB.1 FR2 | SSB.1 FR2 |
| PDSCH/PDCCH subcarrier spacing | | kHz | 120 | 120 | 120 | 120 |
| SS-RSSI-Measurement | | | Not Applicable | | | |
| EPRE ratio of PSS to SSS | | | | | | |
| EPRE ratio of PBCH_DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | | | | |
| \hat{E}_s / N_{oc} | | dB | 3 | 3 | -3 | -3 |
| Propagation condition | | | AWGN | | AWGN | |
| Antenna configuration | | | 1x2 | | 1x2 | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 5: Void</p> | | | | | | |

Table A.7.7.2.1.2-3: SS-RSRQ Intra frequency OTA related test parameters

| | Unit | Test 1 | | Test 2 | |
|---|---|--------------------------------------|--------|--------------------------------------|--------|
| | | Cell 1 | Cell 2 | Cell 1 | Cell 2 |
| Angle of arrival configuration | | Setup 1 according to clause A.3.15.1 | | Setup 1 according to clause A.3.15.1 | |
| Assumption for UE beams ^{Note 9} | | Rough | | | |
| N_{oc} ^{Note1} | $\text{dBm}/15\text{kHz}$ ^{Note4} | -95 | | -95 | |
| N_{oc} ^{Note1} | dBm/SCS ^{Note3} | -86 | | -86 | |
| SS-RSRP ^{Note2} | dBm/SCS ^{Note4} | -83 | -83 | -89 | -89 |
| SS-RSRQ ^{Note2} | dB | -14.77 | -14.77 | -16.81 | -16.81 |
| \hat{E}_s/I_{ot} | dB | -1.76 | -1.76 | -4.76 | -4.76 |
| I_o ^{Note2} | $\text{dBm}/95.04\text{MHz}$ ^{Note4} | -50 | | -54 | -54 |

| | |
|---------|--|
| Note 1: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. |
| Note 2: | SS-RSRQ, SS-RSRP, and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves. |
| Note 3: | SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. |
| Note 4: | Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone |
| Note 5: | As observed with 0dBi gain antenna at the centre of the quiet zone |
| Note 6: | NR operating band groups are as defined in Clause 3.5.2. |
| Note 7: | Void |
| Note 8: | Void |
| Note 9: | Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation |

A.7.7.2.1.3 Test Requirements

The SS-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal SS-RSRQ+2.5dB to Nominal SS-RSRQ-3.5dB and the SS-RSRQ measurement accuracy in test 2 shall be within the range Nominal RSRQ+3.5dB to Nominal RSRQ-4.5dB according to the requirements in clause 10.1.8.1.1 with an additional -1dB margin reflecting the possible impact of UE self noise in the test. Nominal RSRQ is the value shown in table A.7.7.2.1.2-3. Relative accuracy shall fulfil the requirements in clause 10.1.8.1.1.

A.7.7.2.2 SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.7.7.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.9.1.1 and 10.1.9.1.2 for inter-frequency measurement.

A.7.7.2.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.7.7.2.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-RSRQ inter-frequency measurement are tested by using test parameters in Table A.7.7.2.2.2-2 and Table A.7.7.2.2.2-3.. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.7.7.2.2.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |

Table A.7.7.2.2.2-2: SS-RSRQ Inter frequency general test parameters

| Parameter | Unit | Test 1 | | Test 2 | |
|-----------|------|--------|--------|--------|--------|
| | | Cell 1 | Cell 2 | Cell 1 | Cell 2 |

| SSB ARFCN | | Freq1 | freq2 | freq1 | Freq2 |
|--|--|-----------------------------|----------------|-----------------------------|----------------|
| Duplex mode | | TDD | | TDD | |
| TDD configuration | | TDDConf.3.1 | | TDDConf.3.1 | |
| BW_{channel} | MHz | 100: $N_{\text{RB,c}} = 66$ | | 100: $N_{\text{RB,c}} = 66$ | |
| PDSCH Reference measurement channel | | SR.3.1 TDD | - | SR.3.1 TDD | - |
| RMSI CORESET Reference Channel | | CR.3.1 TDD | - | CR.3.1 TDD | - |
| OCNG Patterns | | OP.1 | OP.1 | OP.1 | OP.1 |
| SMTC configuration | | SMTC. 1 FR2 | SMTC. 1 FR2 | SMTC. 1 FR2 | SMTC. 1 FR2 |
| PDSCH/PDCCH subcarrier spacing | kHz | 120 | 120 | 120 | 120 |
| EPRE ratio of PSS to SSS | dB | 0 | 0 | 0 | 0 |
| EPRE ratio of PBCH_DMRS to SSS | | | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | | |
| \hat{E}_s / N_{oc} | dB | -1.75 | -1.75 | 3 | -1.75 |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | |
| Note 3: | SS-RSRQ, SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | |
| Note 4: | SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | | |

Table A.7.7.2.2-3: SS-RSRQ Inter frequency OTA related test parameters

| Parameter | Unit | Test 1 | | Test 2 | |
|-----------|------|--------|--------|--------|--------|
| | | Cell 1 | Cell 2 | Cell 1 | Cell 2 |

| AoA setup | | Setup 1 in clause A.3.15. | | Setup 1 in clause A.3.15. | |
|--|---------------------------------------|---------------------------|--------|---------------------------|--------|
| Assumption for UE beams ^{Note 8} | | Rough | | Rough | |
| N_{oc} ^{Note1} | dBm/15kHz ^{Note4} | -94.03 | | -94.03 | |
| N_{oc} ^{Note1} | dBm/SCS ₃ ^{Note5} | -85.0 | | -85.0 | |
| SSB_RP ^{Note2} | dBm/SCS _{Note4} | -86.75 | -86.75 | -88 | -88 |
| SS-RSRQ ^{Note2} | dB | -14.75 | -14.75 | -15.56 | -15.56 |
| \hat{E}_s/I_{ot} | dB | -1.75 | -1.75 | -3 | -3 |
| I_o ^{Note2} | dBm/95.04 MHz ^{Note4} | -53.8 | -53.8 | -54.25 | -54.25 |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-RSRQ, SSB_RP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone</p> <p>Note 6: Void</p> <p>Note 7: Void</p> <p>Note 8: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation</p> | | | | | |

A.7.7.2.2.3 Test Requirements

The SS-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal SS-RSRQ+2.5dB to Nominal SS-RSRQ -3.5dB and the SS-RSRQ measurement accuracy in test 2 shall be within the range Nominal SS-RSRQ +3.5dB to Nominal SS-RSRQ -4.5dB according to the requirements in clause 10.1.10.1.1 with an additional -1dB margin reflecting the possible impact of UE self noise in the test.

The SS-RSRQ relative measurement accuracy shall fulfil the requirements in clause 10.1.10.1.2.

A.7.7.3 SS-SINR

A.7.7.3.1 SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.7.7.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.13.1.1.

A.7.7.3.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.7.3.1.2-1. . The absolute accuracy of SS-SINR intra-frequency measurement is test by using the parameters in Table A.7.7.3.1.2-2 and Table A.7.7.3.1.2-3. In all test cases, Cell 1 is the PCell and Cell 2 the target cell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.7.7.3.1.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |

Table A.7.7.3.1.2-2: SS-SINR Intra frequency test parameters

| Parameter | Unit | Test 1 | | Test 2 | |
|-----------|------|--------|--------|--------|--------|
| | | Cell 1 | Cell 2 | Cell 1 | Cell 2 |
| SSB ARFCN | | Freq2 | | Freq2 | |

| | | | | | |
|---|--|-----------------------------|--------------|-----------------------------|--------------|
| Duplex mode | | TDD | | TDD | |
| TDD configuration | | TDDConf.3.1 | | TDDConf.3.1 | |
| BW _{channel} | MHz | 100: N _{RB,c} = 66 | | 100: N _{RB,c} = 66 | |
| Downlink initial BWP configuration | | DLBWP.0.1 | | | |
| Downlink dedicated BWP configuration | | DLBWP.1.1 | | | |
| Uplink initial BWP configuration | | ULBWP.0.1 | | | |
| Uplink dedicated BWP configuration | | ULBWP.1.1 | | | |
| DRX cycle configuration | ms | Not applicable | | | |
| TRS configuration | | TRS.2.1 TDD | | | |
| TCI state | | TCI.State.0 | | | |
| PDSCH Reference measurement channel | | SR.3.1 TDD | | SR.3.1 TDD | |
| RMSI CORESET Reference Channel | | CR.3.1 TDD | - | CR.3.1 TDD | |
| Dedicated RMSI CORESET Reference Channel | | CCR.3 .1 TDD | - | CCR.3. 1 TDD | - |
| OCNG Patterns | | OP.1 | OP.1 | OP.1 | OP.1 |
| SMTC configuration | | SMTC.1 | | | |
| SSB configuration | | SSB.1 FR2 | SSB.1 FR2 | SSB.1 FR2 | SSB.1 FR2 |
| PDSCH/PDCCH subcarrier spacing | kHz | 120 | 120 | 120 | 120 |
| SS-RSSI-Measurement | | Not Applicable | | | |
| EPRE ratio of PSS to SSS | dB | 0 | 0 | 0 | 0 |
| EPRE ratio of PBCH_DMRS to SSS | | | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | | | |
| \hat{E}_s / N_{oc} | dB | 4.54 | 2.66 | -3 | -3 |
| Propagation conditions | | AWGN | | | |
| Antenna configuration | | 1x2 | | | |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | |
| Note 3: | SS-SINR, SS-RSRP, and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | |
| Note 4: | SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | | |

Table A.7.7.3.1.2-3: SS-SINR Intra frequency OTA related test parameters

| Parameter | Unit | Test 1 | | Test 3 | |
|---|------|--------------------------------------|--------|--------------------------------------|--------|
| | | Cell 1 | Cell 2 | Cell 1 | Cell 2 |
| Angle of arrival configuration | | Setup 1 according to clause A.3.15.1 | | Setup 1 according to clause A.3.15.1 | |
| Assumption for UE beams ^{Note 9} | | Rough | | Rough | |

| | | | | | |
|---|--------------------------------------|--------|--------|-------|-------|
| N_{oc} ^{Note1} | dBm/15kHz ^{Note4} | -105 | | -105 | |
| N_{oc} ^{Note1} | dBm/SCS ^{Note3} | -96 | | -96 | |
| SS-RSRP ^{Note2} | dBm/SCS ^{Note4} | -91.46 | -93.34 | -99 | -99 |
| SS-SINR ^{Note2} | dB | 0 | -3.2 | -4.76 | -4.76 |
| \hat{E}_s/I_{ot} | dB | 0 | -3.2 | -4.76 | -4.76 |
| I_o ^{Note2} | dBm/95.04 MHz ^{Note4} | -59.2 | | -64 | |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-SINR, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone</p> <p>Note 6: NR operating band groups are as defined in clause 3.5.2.</p> <p>Note 7: Void</p> <p>Note 8: Void</p> <p>Note 9: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation</p> | | | | | |

A.7.7.3.1.3 Test Requirements

The SS-SINR absolute measurement accuracy in test 1 shall be within the range Nominal SS-SINR+3B to Nominal SS-SINR -4dB and the SS-SINR measurement accuracy in test 2 shall be within the range Nominal SS-SINR +3.5dB to Nominal SS-SINR -4.5dB according to the requirements in clause 10.1.10.13.1 with an additional -1dB margin reflecting the possible impact of UE self noise in the test. The relative SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.13.1.1.

A.7.7.3.2 SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.7.7.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.15.1.1 and 10.1.15.1.2 for inter-frequency measurement.

A.7.7.3.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.7.7.3.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test parameters in Table A.7.7.3.2.2-2 and Table A.7.7.3.2.2-3. In all test cases, Cell 1 is the PCell and Cell 2 is target cell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.7.7.3.2.2-1: SS-SINR Inter frequency SS-SINR supported test configurations

| Configuration | Description |
|----------------------|---|
| 1 | 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |

Table A.7.7.3.2.2-2: SS-SINR Inter frequency general test parameters

| Parameter | Unit | Test 1 | | Test 2 | | Test 3 | |
|--|--|-----------------------------|----------------|-----------------------------|----------------|-----------------------------|----------------|
| | | Cell 1 | Cell 2 | Cell 1 | Cell 2 | Cell 1 | Cell 2 |
| SSB ARFCN | | freq1 | freq2 | freq1 | freq2 | freq1 | freq2 |
| Duplex mode | | TDD | | TDD | | TDD | |
| TDD configuration | | TDDConf.3.1 | | TDDConf.3.1 | | TDDConf.3.1 | |
| BW _{channel} | MHz | 100: N _{RB,c} = 66 | | 100: N _{RB,c} = 66 | | 100: N _{RB,c} = 66 | |
| Downlink initial BWP configuration | | DLBWP.0.1 | | | | | |
| Downlink dedicated BWP configuration | | DLBWP.1.1 | | | | | |
| Uplink initial BWP configuration | | ULBWP.0.1 | | | | | |
| Uplink dedicated BWP configuration | | ULBWP.1.1 | | | | | |
| DRX cycle configuration | ms | Not applicable | | | | | |
| TRS configuration | | TRS.2.1 TDD | | | | | |
| TCI state | | TCI.State.0 | | | | | |
| AoA setup | | Setup 3 defined in A.3.15 | | | | | |
| PDSCH Reference measurement channel | | SR.3.1 TDD | - | SR.3.1 TDD | - | SR.3.1 TDD | - |
| RMSI CORESET Reference Channel | | CR.3.1 TDD | - | CR.3.1 TDD | - | CR.3.1 TDD | - |
| OCNG Patterns | | OP.1 | OP.1 | OP.1 | OP.1 | OP.1 | OP.1 |
| SMTc configuration | | SMTc. 1 FR2 | SMTc. 1 FR2 | SMTc. 1 FR2 | SMTc. 1 FR2 | SMTc. 1 FR2 | SMTc. 1 FR2 |
| PDSCH/PDCCH subcarrier spacing | kHz | 120 | 120 | 120 | 120 | 120 | 120 |
| EPRE ratio of PSS to SSS | dB | 0 | 0 | 0 | 0 | 0 | 0 |
| EPRE ratio of PBCH_DMRS to SSS | | | | | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | | | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | | | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | | | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | | | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | | | | |
| \hat{E}_s / N_{oc} | dB | -0.5 | -0.5 | 11.0 | 11.0 | -3.0 | -3.0 |
| Propagation conditions | | AWGN | | | | | |
| Antenna configuration | | 1x2 | | | | | |
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | | | | |
| Note 3: | SS-SINR, SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | | |
| Note 4: | SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | | | | |

Table A.7.7.3.2.2-3: SS-SINR Inter frequency OTA related test parameters

| Parameter | Unit | Test 1 | | Test 2 | | Test 3 | |
|-----------|------|--------|--------|--------|--------|--------|--------|
| | | Cell 1 | Cell 2 | Cell 1 | Cell 2 | Cell 1 | Cell 2 |

| Angle of arrival configuration | degrees | Setup 1 according to A.3.15.1 | | Setup 1 according to A.3.15.1 | | Setup 1 according to A.3.15.1 | |
|--|--------------------------------|-------------------------------|-------|-------------------------------|-----|-------------------------------|------|
| Assumption for UE beams ^{Note 10} | | Rough | | Rough | | Rough | |
| N_{oc} ^{Note1} | dBm/15kHz ^{Note4} | -105 | | -105 | | -105 | |
| N_{oc} ^{Note1} | dBm/SCS ^{Note3} | -96 | | -96 | | -96 | |
| SS-RSRP ^{Note2} | dBm/SCS ^{Note4} | -96.5 | -96.5 | -85 | -85 | -99 | -99 |
| SS-SINR ^{Note2} | dB | -0.5 | -0.5 | 11 | 11 | -3.0 | -3.0 |
| \hat{E}_s/I_{ot} | dB | -0.5 | -0.5 | 11 | 11 | -3.0 | -3.0 |
| I_o ^{Note2} | dBm/95.04 MHz ^{Note4} | -69.3 | | -55.4 | | -65.24 | |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-SINR, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone</p> <p>Note 6: NR operating band groups are as defined in Clause 3.5.2.</p> <p>Note 7: Void</p> <p>Note 8: Void</p> <p>Note 9: Void</p> <p>Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation</p> | | | | | | | |

A.7.7.3.2.3 Test Requirements

The SS-SINR absolute measurement accuracy in test 1 shall be within the range Nominal SS-SINR +3dB to Nominal SS-SINR -4dB and the SS-SINR measurement accuracy in test 2 shall be within the range Nominal SS-SINR +3.5dB to Nominal SS-SINR -4.5dB according to the requirements in clause 10.1.15.1.1 with an additional -1dB margin reflecting the possible impact of UE self noise in the test.

The SS-SINR relative measurement accuracy shall fulfil the requirements in clause 10.1.15.1.2.

A.7.7.4 L1-RSRP measurement for beam reporting

A.7.7.4.1 SSB based L1-RSRP measurement

A.7.7.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 9.5.2 and clause 10.1.20.1 for L1-RSRP measurements based on SSB with the testing configurations for NR cells in Table A.7.7.4.1.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

Table A.7.7.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

| Config | Description |
|--------|---|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE FDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations in each supported band |

A.7.7.4.1.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.7.4.1.2-1 and Table A.7.7.4.1.2-2 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.7.7.4.1.2-1 and Table A.7.7.4.1.2-2.

Here is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources. UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSB resources 0 and 1.

Table A.7.7.4.1.2-1: FR2 SSB based L1-RSRP general test parameters

| Parameter | Config | Unit | Test 1 | Test 2 |
|---|--------|------|-----------------------------|-----------------------------|
| SSB GSCN | 1~2 | | freq1 | freq1 |
| Duplex mode | 1~2 | | TDD | TDD |
| TDD Configuration | 1~2 | | TDDConf.3.1 | TDDConf.3.1 |
| BW _{channel} | 1~2 | MHz | 100: N _{RB,c} = 66 | 100: N _{RB,c} = 66 |
| PDSCH Reference measurement channel | 1~2 | | SR.3.1 TDD | SR.3.1 TDD |
| RMSI CORESET Reference Channel | 1~2 | | CR.3.1 TDD | CR.3.1 TDD |
| Dedicated CORESET Reference Channel | 1~2 | | CCR.3.1 TDD | CCR.3.1 TDD |
| SSB configuration | 1 | | SSB.1 FR2 | SSB.1 FR2 |
| | 2 | | SSB.2 FR2 | SSB.2 FR2 |
| OCNG Patterns | 1~2 | | OP.1 | OP.1 |
| Initial BWP Configuration | 1~2 | | DLBWP.0.1 | DLBWP.0.1 |
| | | | ULBWP.0.1 | ULBWP.0.1 |
| Dedicated BWP configuration | 1~2 | | DLBWP.1.3 | DLBWP.1.3 |
| | | | ULBWP.1.3 | ULBWP.1.3 |
| TRS Configuration | 1~2 | | TRS.2.1 TDD | TRS.2.1 TDD |
| PDCCH/PDSCH TCI Configuration | 1~2 | | TCI.State.2 | TCI.State.2 |
| SMTTC configuration | 1~2 | | SMTTC.1 | SMTTC.1 |
| reportConfigType | 1~2 | | periodic | periodic |
| reportQuantity | 1~2 | | ssb-Index-RSRP | ssb-Index-RSRP |
| Number of reported RS | 1~2 | | 2 | 2 |
| L1-RSRP reporting period | 1~2 | | slot640 | slot640 |
| Propagation condition | 1~2 | | AWGN | AWGN |
| Antenna configuration | 1~2 | | 1x2 | 1x2 |
| EPRE ratio of PSS to SSS | 1~2 | dB | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> | | | | |

Table A.7.7.4.1.2-2: FR2 SSB based L1-RSRP OTA related test parameters

| Parameter | Config | Unit | Test 1 | | Test 2 ^{NOTE 3} | |
|---|--|---------------|-------------------------------|------|-------------------------------|------|
| | | | SSB0 | SSB1 | SSB0 | SSB1 |
| Angle of arrival configuration | | | Setup 1 according to A.3.15.1 | | Setup 1 according to A.3.15.1 | |
| Assumption for UE beams ^{Note 4} | | | Rough | | Rough | |
| N_{oc} | 1~4 | dBm/15 kHz | -100 | | n.a. | |
| N_{oc} | 1,2 | dBm/SS | -91 | | n.a. | |
| | 3,4 | B SCS | -88 | | n.a. | |
| \hat{E}_s/I_{ot} | 1~4 | dB | 10 | -2 | n.a. | |
| SS-RSRP ^{Note1} | 1,2 | dBm/SC | -81 | -93 | As in Table B.2.4-2 | |
| | 3,4 | S | -78 | -90 | As in Table B.2.4-2 | |
| I_o ^{Note1} | 1~4 | dBm/95.04M Hz | -51.57 | | SS-RSRP+28.98 | |
| \hat{E}_s/N_{oc} | 1~4 | dB | 10 | -2 | n.a. | |
| Note 1: | RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | |
| Note 2: | RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | | | |
| Note 3: | No additional noise is added by the test system in Test 2. | | | | | |
| Note 4: | Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation | | | | | |

A.7.7.4.1.3 Test Requirements

After 640ms from the beginning of the test, the L1-RSRP measurement accuracy for SSB#0 and SSB#1 of Cell 2 shall fulfil the requirements in clauses 10.1.20.1. The following requirements are to be verified:

For Test 1:

Absolute accuracy of SSB0 and absolute accuracy of SSB1. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.7.7.4.1.3-1.

Relative accuracy of SSB0 compared with SSB1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.1.2-1.

For Test 2:

Absolute accuracy of SSB0 and absolute accuracy of SSB1. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.7.7.4.1.3-1.

Relative accuracy of SSB0 compared with SSB1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.1.2-1.

Table A.7.7.4.1.3-1: L1-RSRP absolute accuracy test requirement

| | Test requirement ^{Notes 1,2,3} |
|---------|--|
| SSB0 | $SSB_RP0 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP0 + \delta + G_{max}$ |
| SSB1 | $SSB_RP1 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP1 + \delta + G_{max}$ |
| Note 1: | SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the SSB n under consideration |
| Note 2: | δ is the RSRP absolute accuracy requirement from Table 10.1.20.1.1-1, selected according to the l_0 used in the test |
| Note 3: | G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class |

A.7.7.4.2 CSI-RS based L1-RSRP measurement on resource set with repetition off

A.7.7.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 9.5.3 and clause 10.1.20.2 for L1-RSRP measurements based on CSI-RS with the testing configurations for NR cells in Table A.7.7.4.2.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

Table A.7.7.4.2.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

| Config | Description |
|---------------|---|
| 1 | NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode |

A.7.7.4.2.2 Test parameters

In this set of test cases there are one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.7.4.2.2-1 and Table A.7.7.4.2.2-2 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.7.7.4.2.2-1 and Table A.7.7.4.2.2-2.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB.

Table A.7.7.4.2.2-1: FR2 CSI-RS based L1-RSRP general test parameters

| Parameter | Config | Unit | Test 1 | Test 2 |
|---|--------|------|-----------------------------|-----------------------------|
| SSB GSCN | 1 | | freq1 | freq1 |
| Duplex mode | 1 | | TDD | TDD |
| TDD Configuration | 1 | | TDDConf.3.1 | TDDConf.3.1 |
| BW _{channel} | 1 | MHz | 100: N _{RB,c} = 66 | 100: N _{RB,c} = 66 |
| PDSCH Reference measurement channel | 1 | | SR.3.1 TDD | SR.3.1 TDD |
| RMSI CORESET Reference Channel | 1 | | CR.3.1 TDD | CR.3.1 TDD |
| Dedicated CORESET Reference Channel | 1 | | CCR.3.1 TDD | CCR.3.1 TDD |
| SSB configuration | 1 | | SSB.1 FR2 | SSB.1 FR2 |
| OCNG Patterns | 1 | | OP.1 | OP.1 |
| Initial BWP Configuration | 1 | | DLBWP.0.1 ULBWP.0.1 | DLBWP.0.1 ULBWP.0.1 |
| Dedicated BWP configuration | 1 | | DLBWP.1.1 ULBWP.1.1 | DLBWP.1.1 ULBWP.1.1 |
| TRS Configuration | 1 | | TRS.2.1 TDD | TRS.2.1 TDD |
| PDCCH/PDSCH TCI Configuration | 1 | | TCI.State.2 | TCI.State.2 |
| SMTC configuration | 1 | | SMTC.1 | SMTC.1 |
| CSI-RS | 1 | | CSI-RS.3.2 TDD | CSI-RS.3.2 TDD |
| reportConfigType | 1 | | periodic | periodic |
| reportQuantity | 1 | | cri-RSRP | cri-RSRP |
| Number of reported RS | 1 | | 2 | 2 |
| L1-RSRP reporting period | 1 | | slot80 | slot80 |
| Propagation condition | 1 | | AWGN | AWGN |
| Antenna configuration | 1 | | 1x2 | 1x2 |
| EPRE ratio of PSS to SSS | 1 | dB | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | | | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> | | | | |

Table A.7.7.4.2.2-2: FR2 CSI-RS based L1-RSRP OTA related test parameters

| Parameter | Config | Unit | Test 1 | | Test 2 ^{NOTE 3} | |
|---|--|---------------|-------------------------------|---------|-------------------------------|---------|
| | | | CSI-RS0 | CSI-RS1 | CSI-RS0 | CSI-RS1 |
| Angle of arrival configuration | | | Setup 1 according to A.3.15.1 | | Setup 1 according to A.3.15.1 | |
| Assumption for UE beams ^{Note 4} | | | Rough | | Rough | |
| N_{oc} | 1~2 | dBm/15 kHz | -100 | | n.a. | |
| N_{oc} | 1~2 | dBm/SS B SCS | -91 | | n.a. n.a. | |
| \hat{E}_s/I_{α} | 1~2 | dB | 10 | -2 | n.a. | |
| CSI-RS-RSRP ^{Note1} | 1~2 | dBm/SC S | -81 | -93 | As in Table B.2.4-2 | |
| I_0 ^{Note1} | 1~2 | dBm/95.04M Hz | -59.86 | | SS-RSRP+28.98 | |
| \hat{E}_s/N_{oc} | 1~2 | dB | -51.57 | -2 | n.a. | |
| Note 1: | RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | | | |
| Note 2: | RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | | | |
| Note 3: | No additional noise is added by the test system in Test 2. | | | | | |
| Note 4: | Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation | | | | | |

A.7.7.4.2.3 Test Requirements

After 640ms from the beginning of the test, the L1-RSRP measurement accuracy for CSI-RS#0 and CSI-RS#1 of Cell 1 shall fulfil the requirements in clause 10.1.20.2. The following requirements are to be verified:

For Test 1:

Absolute accuracy of CSI-RS0 and absolute accuracy of CSI-RS1. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.7.7.4.2.3-1.

Relative accuracy of CSI-RS0 compared with CSI-RS1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

For Test 2:

Absolute accuracy of CSI-RS0 and absolute accuracy of CSI-RS1. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.7.7.4.2.3-1.

Relative accuracy of CSI-RS0 compared with CSI-RS1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

Table A.7.7.4.2.3-1: L1-RSRP absolute accuracy test requirement

| | Test requirement ^{Notes 1,2,3} |
|---------|--|
| CSI-RS0 | $\text{CSI-RS_RP0} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{CSI-RS_RP0} + \delta + G_{\max}$ |
| CSI-RS1 | $\text{CSI-RS_RP1} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{CSI-RS_RP1} + \delta + G_{\max}$ |
| Note 1: | CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration |
| Note 2: | δ is the RSRP absolute accuracy requirement from Table 10.1.20.2.1-1, selected according to the l_0 used in the test |
| Note 3: | G_{\min} and G_{\max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class |

A.8 E-UTRA standalone tests for NR RRM

Editor notes: All NR RRM tests under E-UTRA standalone operations are included in this Annex. All EN-DC related NR RRM tests are in A.6

A.8.1 Void

A.8.2 RRC_IDLE state mobility

A.8.2.1 Inter-RAT NR Cell re-selection

A.8.2.1.1 E-UTRA Cell reselection to higher priority NR target Cell in FR1

A.8.2.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the E-UTRAN to NR inter-RAT cell reselection requirements specified in clause 4.2.2.5.6 in TS 36.133 [15].

The test scenario comprises of 1 E-UTRA cell and 1 NR cell as given in tables A.8.2.1.1.1-1, A.8.2.1.1.1-2, A.8.2.1.1.1-3 and A.8.2.1.1.1-4. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. E-UTRA cell 1 is already identified by the UE prior to the start of the test. Cell 2 is of higher priority than cell 1.

Table A.8.2.1.1.1-1: Supported test configurations

| Configuration | Description |
|----------------------|--|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.8.2.1.1-2: General test parameters for E-UTRA cell re-selection FR1 NR cell test case

| Parameter | | Unit | Test configuration | Value | Comment |
|------------------------------|-----------------|------|--------------------|-----------|--|
| Initial condition | Active cell | | 1, 2, 3, 4, 5, 6 | Cell1 | The UE camps on cell 1 in the initial phase and during T3 period the UE reselects to cell 2 |
| T3 end condition | Active cell | | 1, 2, 3, 4, 5, 6 | Cell2 | The UE shall perform reselection to cell 2 during T3 |
| | Neighbour cells | | 1, 2, 3, 4, 5, 6 | Cell1 | |
| | Neighbour cells | | 1, 2, 3, 4, 5, 6 | Cell2 | |
| RF Channel Number | | | 1, 2, 3, 4, 5, 6 | 1, 2 | E-UTRAN radio channel (1) and NR radio channel (2) are used for this test |
| Time offset between cells | | | 1, 4 | 3 ms | Asynchronous cells |
| | | | 2, 5 | 3 μ s | Synchronous cells |
| | | | 3, 6 | 3 μ s | Synchronous cells |
| Access Barring Information | | - | 1, 2, 3, 4, 5, 6 | Not Sent | No additional delays in random access procedure. |
| DRX cycle length | | s | 1, 2, 3, 4, 5, 6 | 1.28 | The value shall be used for all cells in the test. |
| NR PRACH configuration index | | | 1, 2, 3, 4, 5, 6 | 102 | The detailed configuration is specified in TS 38.211 clause 6.3.3.2 |
| T1 | | s | 1, 2, 3, 4, 5, 6 | 15 | T1 needs to be defined so that cell re-selection reaction time is taken into account. |
| T2 | | s | 1, 2, 3, 4, 5, 6 | >7 | During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3. |
| T3 | | s | 1, 2, 3, 4, 5, 6 | 75 | T3 needs to be defined so that cell re-selection reaction time is taken into account. |

Table A.8.2.1.1-3: Cell specific test parameters for NR cell 2

| Parameter | Unit | Test configuration | Cell 2 | | |
|-------------------------------------|------|--------------------|-------------|----|----|
| | | | T1 | T2 | T3 |
| TDD configuration | | 1, 4 | N/A | | |
| | | 2, 5 | TDDConf.1.1 | | |
| | | 3, 6 | TDDConf.2.1 | | |
| PDSCH Reference measurement channel | | 1, 4 | SR.1.1 FDD | | |
| | | 2, 5 | SR.1.1 TDD | | |
| | | 3, 6 | SR.2.1 TDD | | |
| RMSI CORESET Reference Channel | | 1, 4 | CR.1.1 FDD | | |
| | | 2, 5 | CR.1.1 TDD | | |
| | | 3, 6 | CR.2.1 TDD | | |
| RMC CORESET Reference Channel | | 1, 4 | CCR.1.1 FDD | | |
| | | 2, 5 | CCR.1.1 TDD | | |
| | | 3, 6 | CCR.2.1 TDD | | |
| OCNG Patterns | | 1, 2, 3, 4, 5, 6 | OP.1 | | |
| SMTc configuration | | 1, 2, 3, 4, 5, 6 | SMTc.1 | | |
| SSB configuration | | 1, 4 | SSB.1 FR1 | | |
| | | 2, 5 | SSB.1 FR1 | | |
| | | 3, 6 | SSB.2 FR1 | | |
| Initial DL BWP configuration | | 1, 2, 3, 4, 5, 6 | DLBWP.0.1 | | |
| Initial UL BWP configuration | | 1, 2, 3, 4, 5, 6 | ULBWP.0.1 | | |

| | | | | | |
|--|---------------|------------------|----------|-----------|--------|
| RLM-RS | | 1, 2, 3, 4, 5, 6 | SSB | | |
| Qrxlevmin | dBm/SCS | 1, 2, 4, 5 | -140 | | |
| | | 3, 6 | -137 | | |
| Pcompensation | dB | 1, 2, 3, 4, 5, 6 | 0 | | |
| Qhyst _s | dB | 1, 2, 3, 4, 5, 6 | 0 | | |
| Qoffset _{s, n} | dB | 1, 2, 3, 4, 5, 6 | 0 | | |
| Cell_selection_and_reselection_quality_measurement | | 1, 2, 3, 4, 5, 6 | SS-RSRP | | |
| \hat{E}_s / I_{ot} | dB | 1, 4 | -4 | -infinity | 12 |
| | | 2, 5 | | | |
| | | 3, 6 | | | |
| N_{oc} Note2 | dBm/SCS | 1, 4 | -98 | | |
| | | 2, 5 | -98 | | |
| | | 3, 6 | -95 | | |
| N_{oc} Note2 | dBm/15 kHz | 1, 4 | -98 | | |
| | | 2, 5 | | | |
| | | 3, 6 | | | |
| \hat{E}_s / N_{oc} | dB | 1, 4 | -4 | -infinity | 12 |
| | | 2, 5 | | | |
| | | 3, 6 | | | |
| SS-RSRP Note3 | dBm/SCS | 1, 4 | -102 | -infinity | -86 |
| | | 2, 5 | -102 | -infinity | -86 |
| | | 3, 6 | -99 | -infinity | -83 |
| Io | dBm/9.36 MHz | 1, 4 | -68.60 | -infinity | -57.78 |
| | dBm/9.36 MHz | 2, 5 | -68.60 | -infinity | -57.78 |
| | dBm/38.16 MHz | 3, 6 | -62.50 | -infinity | -51.69 |
| Treselection | s | 1, 2, 3, 4, 5, 6 | 0 | 0 | 0 |
| Snonintrasearch | dB | 1, 2, 3, 4, 5, 6 | Not sent | | |
| Thresh _{x, high} | dB | 1, 2, 3, 4, 5, 6 | 48 | | |
| Thresh _{serv, low} | dB | 1, 2, 3, 4, 5, 6 | 44 | | |
| Thresh _{x, low} | dB | 1, 2, 3, 4, 5, 6 | 50 | | |
| Propagation Condition | | 1, 2, 3, 4, 5, 6 | AWGN | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | |

Table A.8.2.1.1.1-4: Cell specific test parameters for E-UTRA cell 1

| Parameter | Unit | Cell 1 | | |
|---|------------|---|-----|-----|
| | | T1 | T2 | T3 |
| E-UTRA RF Channel number | | 1 | | |
| BW_{channel} | MHz | 10 | | |
| OCNG Patterns defined in TS 36.133 [15] clause A.3.2 | | OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6 | | |
| PBCH_RA | dB | 0 | | |
| PBCH_RB | dB | | | |
| PSS_RA | dB | | | |
| SSS_RA | dB | | | |
| PCFICH_RB | dB | | | |
| PHICH_RA | dB | | | |
| PHICH_RB | dB | | | |
| PDCCH_RA | dB | | | |
| PDCCH_RB | dB | | | |
| PDSCH_RA | dB | | | |
| PDSCH_RB | dB | | | |
| OCNG_RA ^{Note 1} | dB | | | |
| OCNG_RB ^{Note 1} | dB | | | |
| Qrxlevmin | dBm | -140 | | |
| N_{oc} ^{Note 2} | dBm/15 kHz | -98 | | |
| RSRP ^{Note 3} | dBm/15 KHz | -84 | -84 | -84 |
| \hat{E}_s/I_{ot} | dB | 14 | 14 | 14 |
| \hat{E}_s/N_{oc} | dB | 14 | 14 | 14 |
| Treselection _{EUTRAN} | S | 0 | | |
| Snonintra search | dB | 50 | | |
| Thresh _{x, high} | dB | 48 | | |
| Thresh _{-serving, low} | dB | 44 | | |
| Thresh _{x, low} | dB | 50 | | |
| Propagation Condition | | AWGN | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | |

A.8.2.1.1.2 Test Requirements

The cell reselection delay to a higher priority NR cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{\text{higher_priority_search}} + T_{\text{evaluate, NR}} + T_{\text{SI-NR}}$, and to a lower priority cell can be expressed as: $T_{\text{evaluate, NR}} + T_{\text{SI-NR}}$.

Where:

| | |
|---------------------------------------|---|
| $T_{\text{higher_priority_search}}$ | See clause 4.2.2 in TS 36.133 [15] |
| $T_{\text{evaluate, NR}}$ | See Table 4.2.2.5.6-1 in clause 4.2.2.5.6 in TS 36.133 [15] |
| $T_{\text{SI-NR}}$ | Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case. |

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority NR cell and 7.68 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 8 s.

A.8.3 RRC_CONNECTED state mobility

A.8.3.1 Handover

A.8.3.1.1 E-UTRAN - NR handover in FR1

A.8.3.1.1.1 Test Purpose and Environment

This test shall verify the E-UTRAN to NR FR1 handover requirements as specified in clause 6.1.2.1 specified in clause 5.3.4 in TS 36.133 [15].

The test comprises of one E-UTRA carrier and one NR carrier. There are two cells and one cell on each carrier. Cell 1 is the E-UTRAN and Cell 2 is an inter-RAT NR neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 8.1.2.1-1 of TS 36.133 [15] is configured before T2 begins to enable inter-RAT frequency monitoring.

A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.8.3.1.1-1. General test parameters are provided in Table A.8.3.1.1-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.8.3.1.1-3 and A.8.3.1.1-4 respectively.

Table A.8.3.1.1-1: Supported test configurations for E-UTRAN inter-RAT NR handover

| Configuration | Description |
|---------------|--|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.8.3.1.1-2: General test parameters for E-UTRAN inter-RAT NR handover

| Parameter | | Unit | Value | Comment |
|------------------------------|-------------------|------|-----------------------------------|---|
| NR RF Channel Number | | | 1 | 1 NR carrier frequency is used in the test |
| LTE RF Channel Number | | | 2 | 1 E-UTRAN carrier frequency is used in the test |
| Initial conditions | Active cell | | Cell 1 | E-UTRAN cell |
| | Neighbouring cell | | Cell 2 | NR cell |
| Final condition | Active cell | | Cell 2 | |
| NR measurement quantity | | | SS-RSRP | |
| E-UTRAN measurement quantity | | | RSRP | |
| b2-Threshold1 | | dBm | -84 | Absolute E-UTRAN RSRP threshold for event B2 |
| b2-Threshold2NR | | dBm | As specified in Table A.8.3.1.1-4 | Absolute NR SS-RSRP threshold for event B2 |
| Hysteresis | | dB | 0 | |
| TimeToTrigger | | s | 0 | |
| Filter coefficient | | | 0 | L3 filtering is not used |
| DRX | | | OFF | Non-DRX test |
| Access Barring Information | | - | Not sent | No additional delays in random access procedure |
| Time offset between cells | | | 3 ms | Asynchronous cells |
| Gap pattern configuration Id | | | 0 | As specified in Table 8.1.2.1-1 started before T2 starts [15] |
| T1 | | s | 5 | |
| T2 | | s | ≤5 | |
| T3 | | s | 1 | |

Table A.8.3.1.1-3: Cell specific test parameters for E-UTRAN inter-RAT NR handover (Cell 1)

| Parameter | Unit | Configuration | Cell 1 | | |
|---|------|------------------|--|----|----|
| | | | T1 | T2 | T3 |
| RF channel number | | 1, 2, 3, 4, 5, 6 | 2 | | |
| Duplex mode | | 1, 2, 3 | FDD | | |
| | | 4, 5, 6 | TDD | | |
| TDD special subframe configuration ^{Note1} | | 4, 5, 6 | 6 | | |
| TDD uplink-downlink configuration ^{Note1} | | 4, 5, 6 | 1 | | |
| BW _{channel} | MHz | 1, 2, 3, 4, 5, 6 | 5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100 | | |
| PRACH Configuration ^{Note2} | | 1, 2, 3 | 4 | | |
| | | 4, 5, 6 | 53 | | |
| PDSCH parameters: DL Reference Measurement Channel ^{Note3} | | 1, 2, 3 | 5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD | | |
| | | 4, 5, 6 | 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD | | |
| PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note3} | | 1, 2, 3 | 5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD | | |
| | | 4, 5, 6 | 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD | | |
| OCNG Patterns ^{Note3} | | 1, 2, 3 | 5 MHz: OP.20 FDD 10 MHz: OP.10 FDD | | |

| | | | | | |
|--|-----------|------------------|---|--------|--------|
| | | | 20 MHz: OP.17 FDD | | |
| | | 4, 5, 6 | 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD | | |
| PBCH_RA | dB | 1, 2, 3, 4, 5, 6 | 0 | | |
| PBCH_RB | | | | | |
| PSS_RA | | | | | |
| SSS_RA | | | | | |
| PCFICH_RB | | | | | |
| PHICH_RA | | | | | |
| PHICH_RB | | | | | |
| PDCCH_RA | | | | | |
| PDCCH_RB | | | | | |
| PDSCH_RA | | | | | |
| PDSCH_RB | | | | | |
| OCNG_RA ^{Note4} | | | | | |
| OCNG_RB ^{Note4} | | | | | |
| N_{oc} ^{Note5} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -98 | | |
| \bar{E}_s/N_{oc} | dB | 1, 2, 3, 4, 5, 6 | 7 | 7 | 7 |
| \bar{E}_s/I_{ot} ^{Note6} | dB | 1, 2, 3, 4, 5, 6 | 7 | 7 | 7 |
| RSRP ^{Note6} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -91 | -91 | -91 |
| SCH_RP ^{Note6} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -91 | -91 | -91 |
| I_o ^{Note6} | dBm/9MHz | 1, 2, 3, 4, 5, 6 | -62.43 | -62.43 | -62.43 |
| Propagation Condition | | 1, 2, 3, 4, 5, 6 | AWGN | | |
| Antenna Configuration and Correlation Matrix ^{Note7} | | 1, 2, 3, 4, 5, 6 | 1x2 Low | | |
| <p>Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].</p> <p>Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].</p> <p>Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.</p> <p>Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 6: \bar{E}_s/I_{ot}, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].</p> | | | | | |

Table A.8.3.1.1-4: Cell specific test parameters E-UTRAN inter-RAT NR handover (Cell 2)

| Parameter | Unit | Configuration | Cell 2 | | |
|-------------------------------------|----------------|------------------|----------------------------|----|----|
| | | | T1 | T2 | T3 |
| RF channel number | | 1, 2, 3, 4, 5, 6 | 1 | | |
| Duplex mode | | 1, 4 | FDD | | |
| | | 2, 3, 5, 6 | TDD | | |
| TDD Configuration | | 2, 5 | TDDConf.1.1 | | |
| | | 3, 6 | TDDConf.1.2 | | |
| BW _{channel} | MHz | 1, 4 | 10: $N_{RB,c} = 52$ (FDD) | | |
| | | 2, 5 | 10: $N_{RB,c} = 52$ (TDD) | | |
| | | 3, 6 | 40: $N_{RB,c} = 106$ (TDD) | | |
| PDSCH reference measurement channel | | 1, 4 | SR.1.1 FDD | | |
| | | 2, 5 | SR.1.1 TDD | | |
| | | 3, 6 | SR.2.1 TDD | | |
| CORSET reference channel | | 1, 4 | CR.1.1 FDD | | |
| | | 2, 5 | CR.1.1 TDD | | |
| | | 3, 6 | CR.2.1 TDD | | |
| OCNG pattern ^{Note1} | | 1, 2, 3, 4, 5, 6 | OP.1 | | |
| BWP | Initial DL BWP | 1, 2, 3, 4, 5, 6 | DLBWP.0.1 | | |

| | | | | | | |
|---|------------------|--------------|------------------|-----------|--------|--------|
| | Dedicated DL BWP | | | DLBWP.1.1 | | |
| | Initial UL BWP | | | ULBWP.0.1 | | |
| | Dedicated UL BWP | | | ULBWP.1.1 | | |
| SMTc configuration | | | 1, 2, 3, 4, 5, 6 | SMTc.1 | | |
| SSB configuration | | | 1, 2, 4, 5 | SSB.1 FR1 | | |
| | | | 3, 6 | SSB.2 FR1 | | |
| b2-Threshold2NR | | dBm | 1, 2, 4, 5 | -105 | | |
| | | | 3, 6 | -103 | | |
| EPRE ratio of PSS to SSS | | dB | 1, 2, 3, 4, 5, 6 | 0 | | |
| EPRE ratio of PBCH_DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | | | | |
| EPRE ratio of OCNG DMRS to SSS | | | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | | | | | |
| N_{oc}^{Note2} | | | | | | |
| N_{oc}^{Note2} | | dBm/SCS | 1, 2, 4, 5 | -98 | | |
| | | | 3, 6 | -95 | | |
| \hat{E}_s/N_{oc} | | dB | 1, 2, 3, 4, 5, 6 | -inifinit | 0 | 0 |
| \hat{E}_s/I_{ot}^{Note3} | | dB | 1, 2, 3, 4, 5, 6 | -inifinit | 0 | 0 |
| SS-RSRP ^{Note3} | | dBm/SCS | 1, 2, 4, 5 | -inifinit | -98 | -98 |
| | | | 3, 6 | -inifinit | -95 | -95 |
| I_o^{Note3} | | dBm/9.36 MHz | 1, 2, 4, 5 | -70.05 | -67.04 | -67.04 |
| | | | dBm/38.16 MHz | 3, 6 | -63.96 | -60.94 |
| Propagation condition | | | 1, 2, 3, 4, 5, 6 | AWGN | | |
| Antenna Configuration and Correlation Matrix | | | 1, 2, 3, 4, 5, 6 | 1x2 Low | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: \hat{E}_s/I_{ot}, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | | | | |

A.8.3.1.1.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 85 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and is specified in TS36.331.

$T_{interrupt}$ = 210 ms in the test; $T_{interrupt}$ is defined in TS36.133 clause 5.3.4.3.

This gives a total of 260 ms.

A.8.4 Measurement procedure

A.8.4.1 E-UTRA – NR Inter-RAT SFTD Measurement Delay

A.8.4.1.1 E-UTRA – NR Inter-RAT SFTD Measurement Delay in non-DRX

A.8.4.1.1.1 Test Purpose and Environment

The purpose of this test is to partly verify that measurement reporting delay for SFTD between E-UTRA PCell and inter-RAT NR neighbour cell in FR1 is within the requirements stated in clauses 8.1.2.4.25 and 8.1.2.4.26 of TS 36.133 [15] for E-UTRA FDD and TDD, respectively, when no measurement gaps are provided and no DRX is configured.

The tests consist of a single time period of duration T1. Two carriers are used in the tests: one E-UTRA carrier with the PCell (Cell 1), and one NR carrier with the NR neighbour cell (Cell 2).

Prior to the start of time duration T1, the UE is connected to Cell 1 and configured to carry out intra-frequency measurements only. The point in time at which the UE receives, at the UE antenna connector(s), a RRC message containing a measurement configuration for SFTD measurements on RF channel 2 defines the start of time duration T1. Following the start of T1 the UE shall detect Cell 2, determine the SFN and frame time difference of Cell 2 relative to Cell 1, and send a measurement report.

The supported test configurations are listed in Table A.8.4.1.1.1-1 below. Test parameters and cell-specific parameters for the NR cell are provided in Tables A.8.4.1.1.1-2 and A.8.4.1.1.1-3 below, respectively. Cell-specific parameters for the E-UTRA cell are provided in Table A.3.7.2.1-1 in clause A.3.7.2.1.

Table A.8.4.1.1.1-1: Applicable E-UTRA and NR configurations for inter-RAT SFTD measurement delay test

| Config | Description |
|--------|--|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.8.4.1.1.1-2: Applicable E-UTRA and NR configurations for inter-RAT SFTD measurement delay test

| Parameter | Unit | Test configuration | Value | | Comment |
|---|------|--------------------|-----------|--------|--|
| | | | Test 1 | Test 2 | |
| E-UTRA RF Channel Number | | Config 1,2,3,4,5,6 | 1 | | One E-UTRAN TDD carrier frequencies is used. |
| NR RF Channel Number | | Config 1,2,3,4,5,6 | 1 | | One NR FR1 carrier frequencies is used. |
| Active cell | | Config 1,2,3,4,5,6 | Cell 1 | | Cell 1 is on E-UTRA RF channel number 1. |
| Neighbour cell | | Config 1,2,3,4,5,6 | Cell 2 | | Cell 2 is on NR RF channel number 1. |
| SMTC-SSB parameters | | Config 1,4 | SSB.1 FR1 | | As specified in clause A.3.10.1 |
| | | Config 2,5 | SSB.1 FR1 | | As specified in clause A.3.10.1 |
| | | Config 3,6 | SSB.2 FR1 | | As specified in clause A.3.10.1 |
| CP length | | Config 1,2,3,4,5,6 | Normal | | Applicable to both cells. |
| DRX | | Config 1,2,3,4,5,6 | OFF | | DRX is not used |
| Frame time offset between serving and neighbour cells | ms | Config 1,2,3,4 | 3 | 7 | Asynchronous cells. The timing of Cell 2 relative to the timing of Cell 1. |
| | μs | Config 5,6 | 3 | | Synchronous cells. |
| SFN offset between serving and neighbour cells | | Config 1,2,3,4,5,6 | 0 | 1 | SFN of Cell 2 relative to SFN of Cell 1. |
| T1 | s | Config 1,2,3,4,5,6 | 1 | | |

Table A.8.4.1.1-3: Cell specific test parameters for Cell 2 in inter-RAT SFTD measurement delay test

| Parameter | Unit | Test configuration | Cell 2 |
|---|--------------|--------------------|-----------------------------|
| NR RF Channel Number | | Config 1,2,3,4,5,6 | 1 |
| Duplex mode | | Config 1,4 | FDD |
| | | Config 2,3,5,6 | TDD |
| BW _{channel} | MHz | Config 1,4 | 10: N _{RB,c} = 52 |
| | | Config 2,5 | 10: N _{RB,c} = 52 |
| | | Config 3,6 | 40: N _{RB,c} = 106 |
| TDD configuration | | Config 2,5 | TDDConf.1.1 |
| | | Config 3,6 | TDDConf.2.1 |
| OCNG Pattern defined in A.3.2.1.1 | | Config 1,2,3,4,5,6 | OP.1 |
| SMTC configuration defined in A.3.2.11.1 and A.3.2.11.2 | | Config 1,4 | SMTC.2 |
| | | Config 2,3,5,6 | SMTC.1 |
| PDSCH/PDCCH subcarrier spacing | kHz | Config 1,2,4,5 | 15 |
| | | Config 3,6 | 30 |
| EPRE ratio of PSS to SSS | dB | Config 1,2,3,4,5,6 | 0 |
| EPRE ratio of PBCH DMRS to SSS | dB | | |
| EPRE ratio of PBCH to PBCH DMRS | dB | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | dB | | |
| EPRE ratio of OCNG to OCNG DMRS ^{Note 1} | dB | | |
| N _{oc} ^{Note2} | dBm/15kHz | | -98 |
| N _{oc} ^{Note2} | dBm/SCS | Config 1,2,4,5 | -98 |
| | | Config 3,6 | -95 |
| SS-RSRP ^{Note 3, 4} | dBm/SCS | Config 1,2,4,5 | -94 |
| | | Config 3,6 | -91 |
| \hat{E}_s/I_{ot} | dB | Config 1,2,3,4,5,6 | 4 |
| \hat{E}_s/N_{oc} | dB | Config 1,2,3,4,5,6 | 4 |
| I _o ^{Note 3} | dBm/9.36MHz | Config 1,2,4,5 | -67.11 |
| | dBm/38.16MHz | Config 3,6 | -62.27 |
| Propagation Condition | | Config 1,2,3,4,5,6 | AWGN |
| <p>Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> | | | |

A.8.4.1.1.2 Test Requirements

Following the start of T1, the UE shall detect Cell 2 and determine the relative time difference between Cell 1 and Cell 2. At latest at $T_{\text{RRC_procedure_delay}} + T_{\text{measure_SFTD1}}$ after the beginning of time duration T1, the UE shall send a measurement report on SFTD between Cell 1 and Cell 2.

The observed rate of successful SFTD reports in repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times T_{\text{TI_DCCCH}}$ longer than the measurement reporting delays above due to TTI insertion uncertainty of the measurement report in DCCCH.

A.8.4.1.2 E-UTRA – NR Inter-RAT SFTD Measurement Delay in DRX

A.8.4.1.2.1 Test Purpose and Environment

The purpose of this test is to partly verify that measurement reporting delay for SFTD between E-UTRA PCell and inter-RAT NR neighbour cell in FR1 is within the requirements stated in clauses 8.1.2.4.25 and 8.1.2.4.26 of TS 36.133 [15] for E-UTRA FDD and TDD, respectively, when no measurement gaps are provided and DRX is configured.

The tests consist of a single time period of duration T1. Two carriers are used in the tests: one E-UTRA carrier with the PCell (Cell 1), and one NR carrier with the NR neighbour cell (Cell 2).

Prior to the start of time duration T1, the UE is connected to Cell 1 and configured to carry out intra-frequency measurements only. The point in time at which the UE receives, at the UE antenna connector(s), a RRC message containing a measurement configuration for SFTD measurements on RF channel 2 defines the start of time duration T1. Following the start of T1 the UE shall detect Cell 2, determine the SFN and frame time difference of Cell 2 relative to Cell 1, and send a measurement report.

The supported test configurations are listed in Table A.8.4.1.2.1-1 below. Test parameters are provided in Tables A.8.4.1.2.1-2 below. Cell-specific parameters for the E-UTRA and NR cells are provided in Table A.3.7.2.1-1 in clause A.3.7.2.1, and Table A.8.4.1.1.1-3 in clause A.8.4.1.1.1, respectively.

Table A.8.4.1.2.1-1: Applicable E-UTRA and NR configurations for inter-RAT SFTD measurement delay test in DRX

| Config | Description |
|--------|--|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.8.4.1.2.1-2: Applicable E-UTRA and NR configurations for inter-RAT SFTD measurement delay test in DRX

| Parameter | Unit | Test configuration | Value | | Comment |
|---|------|--------------------|-----------|--------|--|
| | | | Test 1 | Test 2 | |
| E-UTRA RF Channel Number | | Config 1,2,3,4,5,6 | 1 | | One E-UTRAN TDD carrier frequencies is used. |
| NR RF Channel Number | | Config 1,2,3,4,5,6 | 1 | | One NR FR1 carrier frequencies is used. |
| Active cell | | Config 1,2,3,4,5,6 | Cell 1 | | Cell 1 is on E-UTRA RF channel number 1. |
| Neighbour cell | | Config 1,2,3,4,5,6 | Cell 2 | | Cell 2 is on NR RF channel number 1. |
| SMTC-SSB parameters | | Config 1,4 | SSB.1 FR1 | | As specified in clause A.3.10.1 |
| | | Config 2,5 | SSB.1 FR1 | | As specified in clause A.3.10.1 |
| | | Config 3,6 | SSB.2 FR1 | | As specified in clause A.3.10.1 |
| CP length | | Config 1,2,3,4,5,6 | Normal | | Applicable to both cells. |
| DRX | | Config 1,2,3,4,5,6 | DRX.4 | | DRX configuration as specified in clause A.3.3.4 |
| Frame time offset between serving and neighbour cells | ms | Config 1,2,3,4 | 3 | 7 | Asynchronous cells. The timing of Cell 2 relative to the timing of Cell 1. |
| | μs | Config 5,6 | 3 | | Synchronous cells. |
| SFN offset between serving and neighbour cells | | Config 1,2,3,4,5,6 | 0 | 1 | SFN of Cell 2 relative to SFN of Cell 1. |
| T1 | s | Config 1,2,3,4,5,6 | 1 | | |

A.8.4.1.2.2 Test Requirements

Following the start of T1, the UE shall detect Cell 2 and determine the relative time difference between Cell 1 and Cell 2. At latest at the earliest DRX activity time following upon $T_{RRC_procedure_delay} + T_{measure_SFTD1}$ from the beginning of time duration T1, the UE shall send a measurement report on SFTD between Cell 1 and Cell 2.

The observed rate of successful SFTD reports in repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCC}$ longer than the measurement reporting delays above due to TTI insertion uncertainty of the measurement report in DCC.

A.8.4.2 E-UTRA – NR Inter-RAT Measurements

A.8.4.2.1 NR Inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used

A.8.4.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.1.1-1, A.8.4.2.1.1-2, A.8.4.2.1.1-3 and A.8.4.2.1.1-4.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.8.4.2.1.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.8.4.2.1.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.8.4.2.1.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

| Configuration | Description |
|---|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note 1: The UE is only required to be tested in one of the supported test configurations. | |

Table A.8.4.2.1.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

| Parameter | Unit | Test configuration | Value | | Comment |
|--|------|--------------------|-----------------------|--------|---|
| | | | Test 1 | Test 2 | |
| E-UTRA RF Channel Number | | 1, 2, 3, 4, 5, 6 | 1 | | One E-UTRA carrier frequency is used. |
| NR RF Channel Number | | 1, 2, 3, 4, 5, 6 | 1 | | One FR1 NR carrier frequency is used. |
| Active cell | | 1, 2, 3, 4, 5, 6 | E-UTRA cell 1 (PCell) | | E-UTRA cell 1 is on E-UTRA RF channel number 1. |
| Neighbour cell | | 1, 2, 3, 4, 5, 6 | NR cell 2 | | NR cell 2 is on NR RF channel number 1. |
| Gap Pattern Id | | 1, 2, 3, 4, 5, 6 | 0 | 4 | As specified in clause Table 8.1.2.1-1 of TS 36.133 [15]. |
| Measurement gap offset | | 1, 2, 3, 4, 5, 6 | 39 | 19 | As specified in TS 36.331 [16]. |
| b2-Threshold1 | dBm | 1, 2, 3, 4, 5, 6 | Note 1 | | E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16] |
| b2-Threshold2NR | dBm | 1, 2, 3, 4, 5, 6 | Note 2 | | SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [16] |
| Hysteresis | dB | 1, 2, 3, 4, 5, 6 | 0 | | |
| CP length | | 1, 2, 3, 4, 5, 6 | Normal | | |
| TimeToTrigger | s | 1, 2, 3, 4, 5, 6 | 0 | | |
| Filter coefficient | | 1, 2, 3, 4, 5, 6 | 0 | | L3 filtering is not used |
| DRX | | 1, 2, 3, 4, 5, 6 | OFF | | DRX is not used |
| Time offset between serving and neighbour cells | | 1, 4 | 3ms | | Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1. |
| | | 2, 3, 5, 6 | 3μs | | Synchronous cells. |
| T1 | s | 1, 2, 3, 4, 5, 6 | 5 | | |
| T2 | s | 1, 2, 3, 4, 5, 6 | 1 | 1 | |
| Note 1: The value of b2-Threshold1 is defined in Table A.8.4.2.1.1-3 | | | | | |
| Note 2: The value of b2-Threshold2NR is defined in Table A.8.4.2.1.1-4 | | | | | |

Table A.8.4.2.1.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neighbour cell in FR1 without SSB time index detection

| Parameter | Unit | Configuration | Cell 1 | |
|---|------|------------------|--|----|
| | | | T1 | T2 |
| RF channel number | | 1, 2, 3, 4, 5, 6 | 1 | |
| Duplex mode | | 1, 2, 3 | FDD | |
| | | 4, 5, 6 | TDD | |
| TDD special subframe configuration ^{Note1} | | 4, 5, 6 | 6 | |
| TDD uplink-downlink configuration ^{Note1} | | 4, 5, 6 | 1 | |
| BW _{channel} | MHz | 1, 2, 3, 4, 5, 6 | 5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100 | |

| | | | | |
|--|-----------|------------------|--|------------------------------|
| PDSCH parameters: DL Reference Measurement Channel ^{Note2} | | 1, 2, 3 | 5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD | |
| | | 4, 5, 6 | 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD | |
| PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2} | | 1, 2, 3 | 5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD | |
| | | 4, 5, 6 | 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD | |
| OCNG Patterns ^{Note2} | | 1, 2, 3 | 5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD | |
| | | 4, 5, 6 | 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD | |
| b2-Threshold1 | dBm | 1, 2, 3, 4, 5, 6 | -79 | |
| PBCH_RA | dB | 1, 2, 3, 4, 5, 6 | 0 | |
| PBCH_RB | | | | |
| PSS_RA | | | | |
| SSS_RA | | | | |
| PCFICH_RB | | | | |
| PHICH_RA | | | | |
| PHICH_RB | | | | |
| PDCCH_RA | | | | |
| PDCCH_RB | | | | |
| PDSCH_RA | | | | |
| PDSCH_RB | | | | |
| OCNG_RA ^{Note3} | | | | |
| OCNG_RB ^{Note3} | | | | |
| N _{oc} ^{Note4} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -104 | |
| \hat{E}_s/N_{oc} | dB | 1, 2, 3, 4, 5, 6 | -Infinity | 17 |
| \hat{E}_s/I_{ot} ^{Note5} | dB | 1, 2, 3, 4, 5, 6 | -Infinity | 17 |
| RSRP ^{Note5} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -Infinity | -87 |
| SCH_RP ^{Note5} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -Infinity | -87 |
| I _o ^{Note5} | dBm/9MHz | 1, 2, 3, 4, 5, 6 | $-76.22+10\log(N_{RB,c}/50)$ | $-59.13+10\log(N_{RB,c}/50)$ |
| Propagation Condition ^{Note6} | | 1, 2, 3, 4, 5, 6 | ETU70 | |
| Antenna Configuration and Correlation Matrix ^{Note6} | | 1, 2, 3, 4, 5, 6 | 1x2 Low | |
| <p>Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].</p> <p>Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.</p> <p>Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 5: \hat{E}_s/I_{ot}, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].</p> | | | | |

Table A.8.4.2.1.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

| Parameter | Unit | Test configuration | Cell 2 | |
|--|--------------|--------------------|-----------------------------|--------|
| | | | T1 | T2 |
| NR RF Channel Number | | 1, 2, 3, 4, 5, 6 | 1 | |
| Duplex mode | | 1, 4 | FDD | |
| | | 2, 3, 5, 6 | TDD | |
| TDD configuration | | 2, 5 | TDDConf.1.1 | |
| | | 3, 6 | TDDConf.2.1 | |
| BW _{channel} | MHz | 1, 2, 4, 5 | 10: N _{RB,c} = 52 | |
| | | 3, 6 | 40: N _{RB,c} = 106 | |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | 1, 2, 3, 4, 5, 6 | OP.1 | |
| SMTC configuration defined in A.3.11.1 and A.3.11.2 | | 1, 4 | SMTC.2 | |
| | | 2, 3, 5, 6 | SMTC.1 | |
| PDSCH/PDCCH subcarrier spacing | kHz | 1, 2, 4, 5 | 15 | |
| | | 3, 6 | 30 | |
| b2-Threshold2NR | dBm/SCS | 1, 2, 4, 5 | -99 | |
| | | 3, 6 | -96 | |
| EPRE ratio of PSS to SSS | | 1, 2, 3, 4, 5, 6 | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | |
| EPRE ratio of OCNG DMRS to SSS (Note 1) | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | |
| N_{oc} ^{Note2} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -98 | |
| N_{oc} ^{Note2} | dBm/SCS | 1, 2, 4, 5 | -98 | |
| | | 3, 6 | -95 | |
| SS-RSRP ^{Note 3} | dBm/SCS | 1, 2, 4, 5 | -Infinity | -91 |
| | | 3, 6 | -Infinity | -88 |
| \hat{E}_s/I_{ot} | dB | 1, 2, 3, 4, 5, 6 | -Infinity | 7 |
| \hat{E}_s/N_{oc} | dB | 1, 2, 3, 4, 5, 6 | -Infinity | 7 |
| I _o ^{Note3} | dBm/9.36MHz | 1, 2, 4, 5 | -Infinity | -65.38 |
| | dBm/38.16MHz | 3, 6 | -Infinity | -61.06 |
| Propagation Condition | | 1, 2, 3, 4, 5, 6 | ETU70 | |
| Antenna Configuration and Correlation Matrix | | 1, 2, 3, 4, 5, 6 | 1x2 Low | |
| <p>Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> | | | | |

A.8.4.2.1.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered

measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and test 2, the UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCCH.

A.8.4.2.2 NR Inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used

A.8.4.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.2.1-1, A.8.4.2.2.1-2, A.8.4.2.2.1-3 and A.8.4.2.2.1-4.

In tests 1 and 2, measurement gap pattern configuration # 0 as defined in Table A.8.4.2.2.1-2 is provided for UE that does not support per-FR gap and in tests 3 and 4, measurement gap pattern configuration #4 as defined in Table A.8.4.2.2.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.8.4.2.2.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

| Configuration | Description |
|---------------|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note 1: | The UE is only required to be tested in one of the supported test configurations. |

Table A.8.4.2.2.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

| Parameter | Unit | Test configuration | Value | | | | Comment |
|--|------|--------------------|-----------------------|--------|--------|--------|---|
| | | | Test 1 | Test 2 | Test 2 | Test 4 | |
| E-UTRA RF Channel Number | | 1, 2, 3, 4, 5, 6 | 1 | | | | One E-UTRA carrier frequency is used. |
| NR RF Channel Number | | 1, 2, 3, 4, 5, 6 | 1 | | | | One FR1 NR carrier frequency is used. |
| Active cell | | 1, 2, 3, 4, 5, 6 | E-UTRA cell 1 (PCell) | | | | E-UTRA cell 1 is on E-UTRA RF channel number 1. |
| Neighbour cell | | 1, 2, 3, 4, 5, 6 | NR cell 2 | | | | NR cell 2 is on NR RF channel number 1. |
| Gap Pattern Id | | 1, 2, 3, 4, 5, 6 | 0 | | 4 | | As specified in clause Table 8.1.2.1-1 of TS 36.133 [15]. |
| Measurement gap offset | | 1, 2, 3, 4, 5, 6 | 39 | | 19 | | As specified in TS 36.331 [16]. |
| b2-Threshold1 | dBm | 1, 2, 3, 4, 5, 6 | Note 1 | | | | E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16] |
| b2-Threshold2NR | dBm | 1, 2, 3, 4, 5, 6 | Note 2 | | | | SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [16] |
| Hysteresis | dB | 1, 2, 3, 4, 5, 6 | 0 | | | | |
| CP length | | 1, 2, 3, 4, 5, 6 | Normal | | | | |
| TimeToTrigger | s | 1, 2, 3, 4, 5, 6 | 0 | | | | |
| Filter coefficient | | 1, 2, 3, 4, 5, 6 | 0 | | | | L3 filtering is not used |
| DRX | | 1, 2, 3, 4, 5, 6 | DRX.9 | DRX.10 | DRX.9 | DRX.10 | As specified in clause A.3.3 |
| Time offset between serving and neighbour cells | | 1, 4 | 3ms | | | | Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1. |
| | | 2, 3, 5, 6 | 3µs | | | | Synchronous cells. |
| T1 | s | 1, 2, 3, 4, 5, 6 | 5 | | | | |
| T2 | s | 1, 2, 3, 4, 5, 6 | 2 | 11 | 2 | 11 | |
| Note 1: The value of b2-Threshold1 is defined in Table A.8.4.2.2.1-3 | | | | | | | |
| Note 2: The value of b2-Threshold2NR is defined in Table A.8.4.2.2.1-4 | | | | | | | |

Table A.8.4.2.2.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neighbour cell in FR1 without SSB time index detection

| Parameter | Unit | Configuration | Cell 1 | |
|---|------|------------------|---|----|
| | | | T1 | T2 |
| RF channel number | | 1, 2, 3, 4, 5, 6 | 1 | |
| Duplex mode | | 1, 2, 3 | FDD | |
| | | 4, 5, 6 | TDD | |
| TDD special subframe configuration ^{Note1} | | 4, 5, 6 | 6 | |
| TDD uplink-downlink configuration ^{Note1} | | 4, 5, 6 | 1 | |
| BW _{channel} | MHz | 1, 2, 3, 4, 5, 6 | 5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 | |

| | | | |
|--|-----------|------------------|--|
| PDSCH parameters: DL Reference Measurement Channel ^{Note2} | | 1, 2, 3 | 20 MHz: $N_{RB,c} = 100$ 5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD |
| | | 4, 5, 6 | 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD |
| PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2} | | 1, 2, 3 | 5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD |
| | | 4, 5, 6 | 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD |
| OCNG Patterns ^{Note2} | | 1, 2, 3 | 5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD |
| | | 4, 5, 6 | 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD |
| b2-Threshold1 | dBm | 1, 2, 3, 4, 5, 6 | -79 |
| PBCH_RA | dB | 1, 2, 3, 4, 5, 6 | 0 |
| PBCH_RB | | | |
| PSS_RA | | | |
| SSS_RA | | | |
| PCFICH_RB | | | |
| PHICH_RA | | | |
| PHICH_RB | | | |
| PDCCH_RA | | | |
| PDCCH_RB | | | |
| PDSCH_RA | | | |
| PDSCH_RB | | | |
| OCNG_RA ^{Note3} | | | |
| OCNG_RB ^{Note3} | | | |
| N_{oc} ^{Note4} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -104 |
| \hat{E}_s/N_{oc} | dB | 1, 2, 3, 4, 5, 6 | -Infinity 17 |
| \hat{E}_s/I_{ot} ^{Note5} | dB | 1, 2, 3, 4, 5, 6 | -Infinity 17 |
| RSRP ^{Note5} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -Infinity -87 |
| SCH_RP ^{Note5} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -Infinity -87 |
| I_o ^{Note5} | dBm/9MHz | 1, 2, 3, 4, 5, 6 | $-76.22+10\log(N_{RB,c}/50)$ $-59.13+10\log(N_{RB,c}/50)$ |
| Propagation Condition ^{Note6} | | 1, 2, 3, 4, 5, 6 | ETU70 |
| Antenna Configuration and Correlation Matrix ^{Note6} | | 1, 2, 3, 4, 5, 6 | 1x2 Low |
| <p>Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].</p> <p>Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.</p> <p>Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 5: \hat{E}_s/I_{ot}, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].</p> | | | |

Table A.8.4.2.2.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

| Parameter | Unit | Test configuration | Cell 2 | |
|---|--|--------------------|-----------------------------|--------|
| | | | T1 | T2 |
| NR RF Channel Number | | 1, 2, 3, 4, 5, 6 | 1 | |
| Duplex mode | | 1, 4 | FDD | |
| | | 2, 3, 5, 6 | TDD | |
| TDD configuration | | 2, 5 | TDDConf.1.1 | |
| | | 3, 6 | TDDConf.2.1 | |
| BW _{channel} | MHz | 1, 2, 4, 5 | 10: N _{RB,c} = 52 | |
| | | 3, 6 | 40: N _{RB,c} = 106 | |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | 1, 2, 3, 4, 5, 6 | OP.1 | |
| SMTC configuration defined in A.3.11.1 and A.3.11.2 | | 1, 4 | SMTC.2 | |
| | | 2, 3, 5, 6 | SMTC.1 | |
| PDSCH/PDCCH subcarrier spacing | kHz | 1, 2, 4, 5 | 15 | |
| | | 3, 6 | 30 | |
| b2-Threshold2NR | dBm/SCS | 1, 2, 4, 5 | -99 | |
| | | 3, 6 | -96 | |
| EPRE ratio of PSS to SSS | | 1, 2, 3, 4, 5, 6 | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | |
| EPRE ratio of OCNG DMRS to SSS (Note 1) | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | |
| N_{oc} ^{Note2} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -98 | |
| N_{oc} ^{Note2} | dBm/SCS | 1, 2, 4, 5 | -98 | |
| | | 3, 6 | -95 | |
| SS-RSRP ^{Note 3} | dBm/SCS | 1, 2, 4, 5 | -Infinity | -91 |
| | | 3, 6 | -Infinity | -88 |
| \hat{E}_s/I_{ot} | dB | 1, 2, 3, 4, 5, 6 | -Infinity | 7 |
| \hat{E}_s/N_{oc} | dB | 1, 2, 3, 4, 5, 6 | -Infinity | 7 |
| I _o ^{Note3} | dBm/9.36MHz | 1, 2, 4, 5 | -Infinity | -65.38 |
| | dBm/38.16MHz | 3, 6 | -Infinity | -61.06 |
| Propagation Condition | | 1, 2, 3, 4, 5, 6 | ETU70 | |
| Antenna Configuration and Correlation Matrix | | 1, 2, 3, 4, 5, 6 | 1x2 Low | |
| Note 1: | OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | |
| Note 3: | SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | |
| Note 4: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | |

A.8.4.2.2.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered

measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1, 2, 3 and 4, the UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.4.2.3 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used

A.8.4.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.3.1-1, A.8.4.2.3.1-2, A.8.4.2.3.1-3 and A.8.4.2.3.1-4.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.8.4.2.3.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.8.4.2.3.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.8.4.2.3.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

| Configuration | Description |
|---|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note 1: The UE is only required to be tested in one of the supported test configurations. | |

Table A.8.4.2.3.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

| Parameter | Unit | Test configuration | Value | | Comment |
|--|------|--------------------|-----------------------|--------|--|
| | | | Test 1 | Test 2 | |
| E-UTRA RF Channel Number | | 1, 2, 3, 4, 5, 6 | 1 | | One E-UTRA carrier frequency is used. |
| NR RF Channel Number | | 1, 2, 3, 4, 5, 6 | 1 | | One FR1 NR carrier frequency is used. |
| Active cell | | 1, 2, 3, 4, 5, 6 | E-UTRA cell 1 (PCell) | | E-UTRA cell 1 is on E-UTRA RF channel number 1. |
| Neighbour cell | | 1, 2, 3, 4, 5, 6 | NR cell 2 | | NR cell 2 is on NR RF channel number 1. |
| Gap Pattern Id | | 1, 2, 3, 4, 5, 6 | 0 | 4 | As specified in clause Table 8.1.2.1-1 of TS 36.133 [15]. |
| Measurement gap offset | | 1, 2, 3, 4, 5, 6 | 39 | 19 | As specified in TS 36.331 [16]. |
| b2-Threshold1 | dBm | 1, 2, 3, 4, 5, 6 | Note 1 | | E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16] |
| b2-Threshold2NR | dBm | 1, 2, 3, 4, 5, 6 | Note 2 | | SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [16] |
| Hysteresis | dB | 1, 2, 3, 4, 5, 6 | 0 | | |
| CP length | | 1, 2, 3, 4, 5, 6 | Normal | | |
| TimeToTrigger | s | 1, 2, 3, 4, 5, 6 | 0 | | |
| Filter coefficient | | 1, 2, 3, 4, 5, 6 | 0 | | L3 filtering is not used |
| DRX | | 1, 2, 3, 4, 5, 6 | OFF | | DRX is not used |
| Time offset between serving and neighbour cells | | 1, 4 | 3ms | | Asynchronous cells. The timing of Cell 2 is 3 ms later than the timing of Cell 1. |
| | | 2, 3, 5, 6 | 3μs | | Synchronous cells. |
| T1 | s | 1, 2, 3, 4, 5, 6 | 5 | | |
| T2 | s | 1, 2, 3, 4, 5, 6 | 2 | 1 | |
| Note 1: The value of b2-Threshold1 is defined in Table A.8.4.2.3.1-3 | | | | | |
| Note 2: The value of b2-Threshold2NR is defined in Table A.8.4.2.3.1-4 | | | | | |

Table A.8.4.2.3.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neighbour cell in FR1 without SSB time index detection

| Parameter | Unit | Configuration | Cell 1 | |
|---|------|------------------|---|----|
| | | | T1 | T2 |
| RF channel number | | 1, 2, 3, 4, 5, 6 | 1 | |
| Duplex mode | | 1, 2, 3 | FDD | |
| | | 4, 5, 6 | TDD | |
| TDD special subframe configuration ^{Note1} | | 4, 5, 6 | 6 | |
| TDD uplink-downlink configuration ^{Note1} | | 4, 5, 6 | 1 | |
| BW _{channel} | MHz | 1, 2, 3, 4, 5, 6 | 5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 | |

| | | | |
|---|--|------------------|--|
| PDSCH parameters: DL Reference Measurement Channel ^{Note2} | | 1, 2, 3 | 20 MHz: $N_{RB,c} = 100$ 5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD |
| | | 4, 5, 6 | 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD |
| PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2} | | 1, 2, 3 | 5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD |
| | | 4, 5, 6 | 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD |
| OCNG Patterns ^{Note2} | | 1, 2, 3 | 5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD |
| | | 4, 5, 6 | 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD |
| b2-Threshold1 | dBm | 1, 2, 3, 4, 5, 6 | -79 |
| PBCH_RA | dB | 1, 2, 3, 4, 5, 6 | 0 |
| PBCH_RB | | | |
| PSS_RA | | | |
| SSS_RA | | | |
| PCFICH_RB | | | |
| PHICH_RA | | | |
| PHICH_RB | | | |
| PDCCH_RA | | | |
| PDCCH_RB | | | |
| PDSCH_RA | | | |
| PDSCH_RB | | | |
| OCNG_RA ^{Note3} | | | |
| OCNG_RB ^{Note3} | | | |
| N_{oc} ^{Note4} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -104 |
| \hat{E}_s/N_{oc} | dB | 1, 2, 3, 4, 5, 6 | -Infinity 17 |
| \hat{E}_s/I_{ot} ^{Note5} | dB | 1, 2, 3, 4, 5, 6 | -Infinity 17 |
| RSRP ^{Note5} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -Infinity -87 |
| SCH_RP ^{Note5} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -Infinity -87 |
| I_o ^{Note5} | dBm/9MHz | 1, 2, 3, 4, 5, 6 | $-76.22+10\log(N_{RB,c}/50)$ $-59.13+10\log(N_{RB,c}/50)$ |
| Propagation Condition ^{Note6} | | 1, 2, 3, 4, 5, 6 | ETU70 |
| Antenna Configuration and Correlation Matrix ^{Note6} | | 1, 2, 3, 4, 5, 6 | 1x2 Low |
| Note 1: | Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23]. | | |
| Note 2: | DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively. | | |
| Note 3: | OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | |
| Note 4: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | |
| Note 5: | \hat{E}_s/I_{ot} , RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | |
| Note 6: | Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25]. | | |

Table A.8.4.2.3.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

| Parameter | Unit | Test configuration | Cell 2 | |
|--|--------------|--------------------|-----------------------------|--------|
| | | | T1 | T2 |
| NR RF Channel Number | | 1, 2, 3, 4, 5, 6 | 1 | |
| Duplex mode | | 1, 4 | FDD | |
| | | 2, 3, 5, 6 | TDD | |
| TDD configuration | | 2, 5 | TDDConf.1.1 | |
| | | 3, 6 | TDDConf.2.1 | |
| BW _{channel} | MHz | 1, 2, 4, 5 | 10: N _{RB,c} = 52 | |
| | | 3, 6 | 40: N _{RB,c} = 106 | |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | 1, 2, 3, 4, 5, 6 | OP.1 | |
| SMTC configuration defined in A.3.11.1 and A.3.11.2 | | 1, 4 | SMTC.2 | |
| | | 2, 3, 5, 6 | SMTC.1 | |
| PDSCH/PDCCH subcarrier spacing | kHz | 1, 2, 4, 5 | 15 | |
| | | 3, 6 | 30 | |
| b2-Threshold2NR | dBm/SCS | 1, 2, 4, 5 | -99 | |
| | | 3, 6 | -96 | |
| EPRE ratio of PSS to SSS | | 1, 2, 3, 4, 5, 6 | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | |
| EPRE ratio of OCNG DMRS to SSS (Note 1) | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | |
| N_{oc} ^{Note2} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -98 | |
| N_{oc} ^{Note2} | dBm/SCS | 1, 2, 4, 5 | -98 | |
| | | 3, 6 | -95 | |
| SS-RSRP ^{Note 3} | dBm/SCS | 1, 2, 4, 5 | -Infinity | -91 |
| | | 3, 6 | -Infinity | -88 |
| \hat{E}_s/I_{ot} | dB | 1, 2, 3, 4, 5, 6 | -Infinity | 7 |
| \hat{E}_s/N_{oc} | dB | 1, 2, 3, 4, 5, 6 | -Infinity | 7 |
| I _o ^{Note3} | dBm/9.36MHz | 1, 2, 4, 5 | -Infinity | -65.38 |
| | dBm/38.16MHz | 3, 6 | -Infinity | -61.06 |
| Propagation Condition | | 1, 2, 3, 4, 5, 6 | ETU70 | |
| Antenna Configuration and Correlation Matrix | | 1, 2, 3, 4, 5, 6 | 1x2 Low | |
| <p>Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> | | | | |

A.8.4.2.3.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1040 ms from the beginning of time period T2. The UE shall not send event triggered

measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and test 2, the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.4.2.4 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used

A.8.4.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.4.1-1, A.8.4.2.4.1-2, A.8.4.2.4.1-3 and A.8.4.2.4.1-4.

In tests 1 and 2, measurement gap pattern configuration # 0 as defined in Table A.8.4.2.4.1-2 is provided for UE that does not support per-FR gap and in tests 3 and 4, measurement gap pattern configuration #4 as defined in Table A.8.4.2.4.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.8.4.2.4.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

| Configuration | Description |
|---------------|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note 1: | The UE is only required to be tested in one of the supported test configurations. |

Table A.8.4.2.4.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

| Parameter | Unit | Test configuration | Value | | | | Comment |
|--|------|--------------------|-----------------------|--------|--------|--------|---|
| | | | Test 1 | Test 2 | Test 2 | Test 4 | |
| E-UTRA RF Channel Number | | 1, 2, 3, 4, 5, 6 | 1 | | | | One E-UTRA carrier frequency is used. |
| NR RF Channel Number | | 1, 2, 3, 4, 5, 6 | 1 | | | | One FR1 NR carrier frequency is used. |
| Active cell | | 1, 2, 3, 4, 5, 6 | E-UTRA cell 1 (PCell) | | | | E-UTRA cell 1 is on E-UTRA RF channel number 1. |
| Neighbour cell | | 1, 2, 3, 4, 5, 6 | NR cell 2 | | | | NR cell 2 is on NR RF channel number 1. |
| Gap Pattern Id | | 1, 2, 3, 4, 5, 6 | 0 | | 4 | | As specified in clause Table 8.1.2.1-1 of TS 36.133 [15]. |
| Measurement gap offset | | 1, 2, 3, 4, 5, 6 | 39 | | 19 | | As specified in TS 36.331 [16]. |
| b2-Threshold1 | dBm | 1, 2, 3, 4, 5, 6 | Note 1 | | | | E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16] |
| b2-Threshold2NR | dBm | 1, 2, 3, 4, 5, 6 | Note 2 | | | | SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [16] |
| Hysteresis | dB | 1, 2, 3, 4, 5, 6 | 0 | | | | |
| CP length | | 1, 2, 3, 4, 5, 6 | Normal | | | | |
| TimeToTrigger | s | 1, 2, 3, 4, 5, 6 | 0 | | | | |
| Filter coefficient | | 1, 2, 3, 4, 5, 6 | 0 | | | | L3 filtering is not used |
| DRX | | 1, 2, 3, 4, 5, 6 | DRX.9 | DRX.10 | DRX.9 | DRX.10 | As specified in clause A.3.3 |
| Time offset between serving and neighbour cells | | 1, 4 | 3ms | | | | Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1. |
| | | 2, 3, 5, 6 | 3μs | | | | Synchronous cells. |
| T1 | s | 1, 2, 3, 4, 5, 6 | 5 | | | | |
| T2 | s | 1, 2, 3, 4, 5, 6 | 2 | 13 | 2 | 13 | |
| Note 1: The value of b2-Threshold1 is defined in Table A.8.4.2.4.1-3 | | | | | | | |
| Note 2: The value of b2-Threshold2NR is defined in Table A.8.4.2.4.1-4 | | | | | | | |

Table A.8.4.2.4.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neighbour cell in FR1 without SSB time index detection

| Parameter | Unit | Configuration | Cell 1 | |
|---|------|------------------|---|----|
| | | | T1 | T2 |
| RF channel number | | 1, 2, 3, 4, 5, 6 | 1 | |
| Duplex mode | | 1, 2, 3 | FDD | |
| | | 4, 5, 6 | TDD | |
| TDD special subframe configuration ^{Note1} | | 4, 5, 6 | 6 | |
| TDD uplink-downlink configuration ^{Note1} | | 4, 5, 6 | 1 | |
| BW _{channel} | MHz | 1, 2, 3, 4, 5, 6 | 5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 | |

| | | | |
|--|-----------|------------------|--|
| PDSCH parameters: DL Reference Measurement Channel ^{Note2} | | 1, 2, 3 | 20 MHz: $N_{RB,c} = 100$ 5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD |
| | | 4, 5, 6 | 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD |
| PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2} | | 1, 2, 3 | 5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD |
| | | 4, 5, 6 | 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD |
| OCNG Patterns ^{Note2} | | 1, 2, 3 | 5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD |
| | | 4, 5, 6 | 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD |
| b2-Threshold1 | dBm | 1, 2, 3, 4, 5, 6 | -79 |
| PBCH_RA | dB | 1, 2, 3, 4, 5, 6 | 0 |
| PBCH_RB | | | |
| PSS_RA | | | |
| SSS_RA | | | |
| PCFICH_RB | | | |
| PHICH_RA | | | |
| PHICH_RB | | | |
| PDCCH_RA | | | |
| PDCCH_RB | | | |
| PDSCH_RA | | | |
| PDSCH_RB | | | |
| OCNG_RA ^{Note3} | | | |
| OCNG_RB ^{Note3} | | | |
| N_{oc} ^{Note4} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -104 |
| \hat{E}_s/N_{oc} | dB | 1, 2, 3, 4, 5, 6 | -Infinity 17 |
| \hat{E}_s/I_{ot} ^{Note5} | dB | 1, 2, 3, 4, 5, 6 | -Infinity 17 |
| RSRP ^{Note5} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -Infinity -87 |
| SCH_RP ^{Note5} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -Infinity -87 |
| I_o ^{Note5} | dBm/9MHz | 1, 2, 3, 4, 5, 6 | $-76.22+10\log(N_{RB,c}/50)$ $-59.13+10\log(N_{RB,c}/50)$ |
| Propagation Condition ^{Note6} | | 1, 2, 3, 4, 5, 6 | ETU70 |
| Antenna Configuration and Correlation Matrix ^{Note6} | | 1, 2, 3, 4, 5, 6 | 1x2 Low |
| <p>Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].</p> <p>Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.</p> <p>Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 5: \hat{E}_s/I_{ot}, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].</p> | | | |

Table A.8.4.2.4.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

| Parameter | Unit | Test configuration | Cell 2 | |
|---|--|--------------------|-----------------------------|--------|
| | | | T1 | T2 |
| NR RF Channel Number | | 1, 2, 3, 4, 5, 6 | 1 | |
| Duplex mode | | 1, 4 | FDD | |
| | | 2, 3, 5, 6 | TDD | |
| TDD configuration | | 2, 5 | TDDConf.1.1 | |
| | | 3, 6 | TDDConf.2.1 | |
| BW _{channel} | MHz | 1, 2, 4, 5 | 10: N _{RB,c} = 52 | |
| | | 3, 6 | 40: N _{RB,c} = 106 | |
| OCNG Patterns defined in A.3.2.1.1 (OP.1) | | 1, 2, 3, 4, 5, 6 | OP.1 | |
| SMTC configuration defined in A.3.11.1 and A.3.11.2 | | 1, 4 | SMTC.2 | |
| | | 2, 3, 5, 6 | SMTC.1 | |
| PDSCH/PDCCH subcarrier spacing | kHz | 1, 2, 4, 5 | 15 | |
| | | 3, 6 | 30 | |
| b2-Threshold2NR | dBm/SCS | 1, 2, 4, 5 | -99 | |
| | | 3, 6 | -96 | |
| EPRE ratio of PSS to SSS | | 1, 2, 3, 4, 5, 6 | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | |
| EPRE ratio of OCNG DMRS to SSS (Note 1) | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | |
| N_{oc} ^{Note2} | dBm/15kHz | 1, 2, 3, 4, 5, 6 | -98 | |
| N_{oc} ^{Note2} | dBm/SCS | 1, 2, 4, 5 | -98 | |
| | | 3, 6 | -95 | |
| SS-RSRP ^{Note 3} | dBm/SCS | 1, 2, 4, 5 | -Infinity | -91 |
| | | 3, 6 | -Infinity | -88 |
| \hat{E}_s/I_{ot} | dB | 1, 2, 3, 4, 5, 6 | -Infinity | 7 |
| \hat{E}_s/N_{oc} | dB | 1, 2, 3, 4, 5, 6 | -Infinity | 7 |
| I _o ^{Note3} | dBm/9.36MHz | 1, 2, 4, 5 | -Infinity | -65.38 |
| | dBm/38.16MHz | 3, 6 | -Infinity | -61.06 |
| Propagation Condition | | 1, 2, 3, 4, 5, 6 | ETU70 | |
| Antenna Configuration and Correlation Matrix | | 1, 2, 3, 4, 5, 6 | 1x2 Low | |
| Note 1: | OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. | | | |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. | | | |
| Note 3: | SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. | | | |
| Note 4: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. | | | |

A.8.4.2.4.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered

measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 12160 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 12160 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1, 2, 3 and 4, the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.4.2.5 NR Inter-RAT event triggered reporting tests for FR2 without SSB time index detection when DRX is not used

A.8.4.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.5.1-1, A.8.4.2.5.1-2 and A.8.4.2.5.1-3.

The cell specific test parameters for E-UTRA cell1 as PCell are defined in clause A.3.7.2.2.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.8.4.2.5.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.8.4.2.5.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) [16] is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have timing information of NR cell 2.

Table A.8.4.2.5.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR2 in non-DRX

| Configuration | Description |
|---|---|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note 1: The UE is only required to be tested in one of the supported test configurations. | |

Table A.8.4.2.5.1-2: General test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in non-DRX

| Parameter | Unit | Test configuration | Value | | Comment |
|---|------|--------------------|-----------------------|--------|---|
| | | | Test 1 | Test 2 | |
| E-UTRA RF Channel Number | | 1, 2 | 1 | | One E-UTRA carrier frequency is used. |
| NR RF Channel Number | | 1, 2 | 1 | | One FR2 NR carrier frequency is used. |
| Active cell | | 1, 2 | E-UTRA cell 1 (PCell) | | E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.3.7.2.2. |
| Neighbour cell | | 1, 2 | NR cell 2 | | NR cell 2 is on NR RF channel number 1. |
| Gap Pattern Id | | 1, 2 | 0 | 4 | As specified in clause Table 8.1.2.1-1 of TS 36.133 [15]. |
| Measurement gap offset | | 1, 2 | 39 | 19 | As specified in TS 36.331 [16]. |
| b1-ThresholdNR | dBm | 1, 2 | Note 1 | | SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [16] |
| Hysteresis | dB | 1, 2 | 0 | | |
| CP length | | 1, 2 | Normal | | |
| TimeToTrigger | s | 1, 2 | 0 | | |
| Filter coefficient | | 1, 2 | 0 | | L3 filtering is not used |
| DRX | | 1, 2 | OFF | | DRX is not used |
| Time offset between serving and neighbour cells | | 1 | 3ms | | Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1. |
| | | 2 | 3μs | | Synchronous cells. |
| T1 | s | 1, 2 | 10 | | |
| T2 | s | 1, 2 | 6 | 3 | |
| Note 1: The value of b1-ThresholdNR is defined in Table A.8.4.2.5.1-3 | | | | | |

Table A.8.4.2.5.1-3: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in non-DRX

| Parameter | Unit | Test configuration | Cell 2 | |
|---|--------------|--------------------|-----------------------------|--------|
| | | | T1 | T2 |
| AoA setup defined in A.3.15.2.1 | | 1, 2 | Setup 2a | |
| NR RF Channel Number | | 1, 2 | 1 | |
| Duplex mode | | 1, 2 | TDD | |
| TDD configuration | | 1, 2 | TDDConf.3.1 | |
| BW _{channel} | MHz | 1, 2 | 100: N _{RB,c} = 66 | |
| OCNG patterns defined in A.3.2.1.1 (OP.1) | | 1, 2 | OP.1 | |
| SMTC configuration defined in A.3.11.1 and A.3.11.2 | | 1 | SMTC.2 | |
| | | 2 | SMTC.1 | |
| PDSCH/PDCCH subcarrier spacing | kHz | 1, 2 | 120 | |
| b1-ThresholdNR UE power class 3 | dBm/SCS | 1, 2 | -108 | |
| EPRE ratio of PSS to SSS | | 1, 2 | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | |
| EPRE ratio of OCNG DMRS to SSS (Note 1) | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | |
| N_{oc} ^{Note2} | dBm/15kHz | 1, 2 | -111 | |
| N_{oc} ^{Note2} | dBm/SCS | 1, 2 | -102 | |
| SS-RSRP ^{Note 3} | dBm/SCS | 1, 2 | -Infinity | -88 |
| \hat{E}_s/I_{ot} | dB | 1, 2 | -Infinity | 14 |
| \hat{E}_s/N_{oc} | dB | 1, 2 | -Infinity | 14 |
| I_o ^{Note3} | dBm/95.04MHz | 1, 2 | -Infinity | -58.84 |
| Propagation Condition | | 1, 2 | AWGN | |
| <p>Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> | | | | |

A.8.4.2.5.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D1 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D2 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and test 2, the UE is not required to report SSB time index.

Table A.8.4.2.5.2-1: Test requirements for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in non-DRX

| Test case | Measurement reporting delay (ms) | |
|------------------|----------------------------------|---------------|
| | Test 1: D1 ms | Test 2: D2 ms |
| UE power class 3 | 3200 | 1600 |

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.4.2.6 NR Inter-RAT event triggered reporting tests for FR2 without SSB time index detection when DRX is used

A.8.4.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.6.1-1, A.8.4.2.6.1-2 and A.8.4.2.6.1-3.

The cell specific test parameters for E-UTRA cell1 as PCell are defined in clause A.3.7.2.2.

In tests 1 and 2, measurement gap pattern configuration # 0 as defined in Table A.8.4.2.6.1-2 is provided for UE that does not support per-FR gap and in tests 3 and 4, measurement gap pattern configuration #4 as defined in Table A.8.4.2.6.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have timing information of NR cell 2.

Table A.8.4.2.6.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR2 in DRX

| Configuration | Description |
|---|---|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note 1: The UE is only required to be tested in one of the supported test configurations. | |

Table A.8.4.2.6.1-2: General test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in DRX

| Parameter | Unit | Test configuration | Value | | | | Comment |
|---|------|--------------------|-----------------------|--------|--------|--------|---|
| | | | Test 1 | Test 2 | Test 3 | Test 4 | |
| E-UTRA RF Channel Number | | 1, 2 | 1 | | | | One E-UTRA carrier frequency is used. |
| NR RF Channel Number | | 1, 2 | 1 | | | | One FR2 NR carrier frequency is used. |
| Active cell | | 1, 2, 3, 4, 5, 6 | E-UTRA cell 1 (PCell) | | | | E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.3.7.2.2. |
| Neighbour cell | | 1, 2, 3, 4, 5, 6 | NR cell 2 | | | | NR cell 2 is on NR RF channel number 1. |
| Gap Pattern Id | | 1, 2, 3, 4, 5, 6 | 0 | | 4 | | As specified in clause Table 8.1.2.1-1 of TS 36.133 [15]. |
| Measurement gap offset | | 1, 2, 3, 4, 5, 6 | 39 | | 19 | | As specified in TS 36.331 [16]. |
| b1-ThresholdNR | dBm | 1, 2 | Note 1 | | | | SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [16] |
| Hysteresis | dB | 1, 2, 3, 4, 5, 6 | 0 | | | | |
| CP length | | 1, 2, 3, 4, 5, 6 | Normal | | | | |
| TimeToTrigger | s | 1, 2, 3, 4, 5, 6 | 0 | | | | |
| Filter coefficient | | 1, 2, 3, 4, 5, 6 | 0 | | | | L3 filtering is not used |
| DRX | | 1, 2, 3, 4, 5, 6 | DRX.9 | DRX.10 | DRX.9 | DRX.10 | As specified in clause A.3.3 |
| Time offset between serving and neighbour cells | | 1 | 3ms | | | | Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1. |
| | | 2 | 3μs | | | | Synchronous cells. |
| T1 | s | 1, 2, 3, 4, 5, 6 | 5 | | | | |
| T2 | s | 1, 2, 3, 4, 5, 6 | 6 | 83 | 6 | 83 | |
| Note 1: The value of b1-ThresholdNR is defined in Table A.8.4.2.5.1-3 | | | | | | | |

Table A.8.4.2.6.1-3: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in DRX

| Parameter | Unit | Test configuration | Cell 2 | |
|---|--------------|--------------------|-----------------------------|--------|
| | | | T1 | T2 |
| AoA setup defined in A.3.15.1 | | 1, 2 | Setup 1 | |
| NR RF Channel Number | | 1, 2 | 1 | |
| Duplex mode | | 1, 2 | TDD | |
| TDD configuration | | 1, 2 | TDDConf.3.1 | |
| BW _{channel} | MHz | 1, 2 | 100: N _{RB,c} = 66 | |
| OCNG patterns defined in A.3.2.1.1 (OP.1) | | 1, 2 | OP.1 | |
| SMTC configuration defined in A.3.11.1 and A.3.11.2 | | 1 | SMTC.2 | |
| | | 2 | SMTC.1 | |
| PDSCH/PDCCH subcarrier spacing | kHz | 1, 2 | 120 | |
| b1-ThresholdNR UE power class 3 | dBm/SCS | 1, 2 | -96 | |
| EPRE ratio of PSS to SSS | | 1, 2 | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | |
| EPRE ratio of OCNG DMRS to SSS (Note 1) | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | |
| N_{oc} ^{Note2} | dBm/15kHz | 1, 2 | -111 | |
| N_{oc} ^{Note2} | dBm/SCS | 1, 2 | -102 | |
| SS-RSRP ^{Note 3} | dBm/SCS | 1, 2 | -Infinity | -88 |
| \hat{E}_s/I_{ot} | dB | 1, 2 | -Infinity | 14 |
| \hat{E}_s/N_{oc} | dB | 1, 2 | -Infinity | 14 |
| I_o ^{Note3} | dBm/95.04MHz | 1, 2 | -Infinity | -58.84 |
| Propagation Condition | | 1, 2 | AWGN | |
| <p>Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> | | | | |

A.8.4.2.6.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D1 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D2 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D3 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D4 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1, 2, 3 and 4, the UE is not required to report SSB time index.

Table A.8.4.2.6.2-1: Test requirements for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in DRX

| Test case | Measurement reporting delay (ms) | | | |
|------------------|----------------------------------|---------------|---------------|---------------|
| | Test 1: D1 ms | Test 2: D2 ms | Test 3: D3 ms | Test 4: D4 ms |
| UE power class 3 | 4800 | 51200 | 4800 | 51200 |

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.4.2.7 NR Inter-RAT event triggered reporting tests for FR2 with SSB time index detection when DRX is not used

A.8.4.2.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.7.1-1, A.8.4.2.7.1-2 and A.8.4.2.7.1-3.

The cell specific test parameters for E-UTRA cell1 as PCell are defined in clause A.3.7.2.2.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.8.4.2.7.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.8.4.2.7.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.8.4.2.7.1-1: NR inter-RAT event triggered reporting tests with SSB index reading for FR2 in non-DRX

| Configuration | Description |
|---|---|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note 1: The UE is only required to be tested in one of the supported test configurations. | |

Table A.8.4.2.7.1-2: General test parameters for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in non-DRX

| Parameter | Unit | Test configuration | Value | | Comment |
|---|------|--------------------|-----------------------|--------|---|
| | | | Test 1 | Test 2 | |
| E-UTRA RF Channel Numbers | | 1, 2 | 1 | | One E-UTRA carrier frequency is used. |
| NR RF Channel Numbers | | 1, 2 | 1 | | One FR2 NR carrier frequency is used. |
| Active cell | | 1, 2 | E-UTRA cell 1 (PCell) | | E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.3.7.2.2. |
| Neighbour cell | | 1, 2 | NR cell 2 | | NR cell 2 is on NR RF channel number 1. |
| Gap Pattern Id | | 1, 2 | 0 | 4 | As specified in clause Table 8.1.2.1-1 of TS 36.133 [15]. |
| Measurement gap offset | | 1, 2 | 39 | 19 | As specified in TS 36.331 [16]. |
| b1-ThresholdNR | dBm | 1, 2 | Note 1 | | SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [16] |
| Hysteresis | dB | 1, 2 | 0 | | |
| CP length | | 1, 2 | Normal | | |
| TimeToTrigger | s | 1, 2 | 0 | | |
| Filter coefficient | | 1, 2 | 0 | | L3 filtering is not used |
| DRX | | 1, 2 | OFF | | DRX is not used |
| Time offset between serving and neighbour cells | | 1 | 3ms | | Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1. |
| | | 2 | 3μs | | Synchronous cells. |
| T1 | s | 1, 2 | 5 | | |
| T2 | s | 1, 2 | 5 | 3 | |
| Note 1: The value of b1-ThresholdNR is defined in Table A.8.4.2.5.1-3 | | | | | |

Table A.8.4.2.7.1-3: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in non-DRX

| Parameter | Unit | Test configuration | Cell 2 | |
|---|--------------|--------------------|-----------------------------|--------|
| | | | T1 | T2 |
| AoA setup defined in A.3.15.1 | | 1, 2 | Setup 1 | |
| NR RF Channel Number | | 1, 2 | 1 | |
| Duplex mode | | 1, 2 | TDD | |
| TDD configuration | | 1, 2 | TDDConf.3.1 | |
| BW _{channel} | MHz | 1, 2 | 100: N _{RB,c} = 66 | |
| OCNG patterns defined in A.3.2.1.1 (OP.1) | | 1, 2 | OP.1 | |
| SMTC configuration defined in A.3.11.1 and A.3.11.2 | | 1 | SMTC.2 | |
| | | 2 | SMTC.1 | |
| PDSCH/PDCCH subcarrier spacing | kHz | 1, 2 | 120 | |
| b1-ThresholdNR UE power class 3 | dBm/SCS | 1, 2 | -96 | |
| EPRE ratio of PSS to SSS | | 1, 2 | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | |
| EPRE ratio of OCNG DMRS to SSS (Note 1) | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | |
| | | | | |
| N_{oc} ^{Note2} | dBm/15kHz | 1, 2 | -111 | |
| N_{oc} ^{Note2} | dBm/SCS | 1, 2 | -102 | |
| SS-RSRP ^{Note 3} | dBm/SCS | 1, 2 | -Infinity | -88 |
| \hat{E}_s/I_{α} | dB | 1, 2 | -Infinity | 14 |
| \hat{E}_s/N_{oc} | dB | 1, 2 | -Infinity | 14 |
| I_o ^{Note3} | dBm/95.04MHz | 1, 2 | -Infinity | -58.84 |
| Propagation Condition | | 1, 2 | AWGN | |
| <p>Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> | | | | |

A.8.4.2.7.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than D1 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than D2 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and test 2, the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

Table A.8.4.2.7.2-1: Test requirements for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in non-DRX

| Test case | Measurement reporting delay (ms) | |
|------------------|----------------------------------|---------------|
| | Test 1: D1 ms | Test 2: D2 ms |
| UE power class 3 | 4160 | 2080 |

A.8.4.2.8 NR Inter-RAT event triggered reporting tests for FR2 with SSB time index detection when DRX is used

A.8.4.2.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.8.1-1, A.8.4.2.8.1-2 and A.8.4.2.8.1-3.

The cell specific test parameters for E-UTRA cell1 as PCell are defined in clause A.3.7.2.2.

In tests 1 and 2, measurement gap pattern configuration # 0 as defined in Table A.8.4.2.8.1-2 is provided for UE that does not support per-FR gap and in tests 3 and 4, measurement gap pattern configuration #4 as defined in Table A.8.4.2.8.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.8.4.2.8.1-1: NR inter-RAT event triggered reporting tests with SSB index reading for FR2 in DRX

| Configuration | Description |
|---|---|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| Note 1: The UE is only required to be tested in one of the supported test configurations. | |

Table A.8.4.2.8.1-2: General test parameters for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in DRX

| Parameter | Unit | Test configuration | Value | | | | Comment |
|---|------|--------------------|-----------------------|--------|--------|--------|---|
| | | | Test 1 | Test 2 | Test 3 | Test 4 | |
| E-UTRA RF Channel Number | | 1, 2 | 1 | | | | One E-UTRA carrier frequency is used. |
| NR RF Channel Number | | 1, 2 | 1 | | | | One FR2 NR carrier frequency is used. |
| Active cell | | 1, 2 | E-UTRA cell 1 (PCell) | | | | E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.3.7.2.2. |
| Neighbour cell | | 1, 2 | NR cell 2 | | | | NR cell 2 is on NR RF channel number 1. |
| Gap Pattern Id | | 1, 2 | 0 | | 4 | | As specified in clause Table 8.1.2.1-1 of TS 36.133 [15]. |
| Measurement gap offset | | 1, 2 | 39 | | 19 | | As specified in TS 36.331 [16]. |
| b1-ThresholdNR | dBm | 1, 2 | Note 1 | | | | SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [16] |
| Hysteresis | dB | 1, 2 | 0 | | | | |
| CP length | | 1, 2 | Normal | | | | |
| TimeToTrigger | s | 1, 2 | 0 | | | | |
| Filter coefficient | | 1, 2 | 0 | | | | L3 filtering is not used |
| DRX | | | DRX.9 | DRX.10 | DRX.9 | DRX.10 | As specified in clause A.3.3 |
| Time offset between serving and neighbour cells | | 1 | 3ms | | | | Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1. |
| | | 2 | 3μs | | | | Synchronous cells. |
| T1 | s | 1, 2 | 5 | | | | |
| T2 | s | 1, 2 | 7 | 70 | 7 | 70 | |
| Note 1: The value of b1-ThresholdNR is defined in Table A.8.4.2.5.1-3 | | | | | | | |

Table A.8.4.2.8.1-3: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 with SSB time index detection

| Parameter | Unit | Test configuration | Cell 2 | |
|---|-------------------|--------------------|-----------------------------|--------|
| | | | T1 | T2 |
| AoA setup defined in A.3.15.1 | | 1, 2 | Setup 1 | |
| NR RF Channel Number | | 1, 2 | 1 | |
| Duplex mode | | 1, 2 | TDD | |
| TDD configuration | | 1, 2 | TDDConf.3.1 | |
| BW _{channel} | MHz | 1, 2 | 100: N _{RB,c} = 66 | |
| OCNG patterns defined in A.3.2.1.1 (OP.1) | | 1, 2 | OP.1 | |
| SMTC configuration defined in A.3.11.1 and A.3.11.2 | | 1 | SMTC.2 | |
| | | 2 | SMTC.1 | |
| PDSCH/PDCCH subcarrier spacing | kHz | 1, 2 | 120 | |
| b1-ThresholdNR UE power class 3 | dBm/SCS | 1, 2 | -96 | |
| EPRE ratio of PSS to SSS | | 1, 2 | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | |
| EPRE ratio of OCNG DMRS to SSS (Note 1) | | | | |
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | |
| N_{oc} ^{Note2} | dBm/15kHz | | | |
| N_{oc} ^{Note2} | dBm/SCS | 1, 2 | -102 | |
| SS-RSRP ^{Note 3} | dBm/SCS | 1, 2 | -Infinity | -88 |
| \hat{E}_s/I_{ot} | dB | 1, 2 | -Infinity | 14 |
| \hat{E}_s/N_{oc} | dB | 1, 2 | -Infinity | 14 |
| I_o ^{Note3} | dBm/95.04MHz z | 1, 2 | -Infinity | -58.84 |
| Propagation Condition | | 1, 2 | AWGN | |
| <p>Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> | | | | |

A.8.4.2.8.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than D1 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than D2 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than D3 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than D4 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1, 2, 3 and 4, the UE is required to report SSB time index.

Table A.8.4.2.8.2-1: Test requirements for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in DRX

| Test case | Measurement reporting delay (ms) | | | |
|------------------|----------------------------------|---------------|---------------|---------------|
| | Test 1: D1 ms | Test 2: D2 ms | Test 3: D3 ms | Test 4: D4 ms |
| UE power class 3 | 6240 | 66560 | 6240 | 66560 |

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.5 Measurement performance

A.8.5.1 SFTD accuracy

A.8.5.1.1 SFTD accuracy

A.8.5.1.1.1 Test Purpose

The purpose of this set of tests is to verify that the SFTD measurement accuracy is within the specified limits. This test will verify the requirements as specified in clause 9.1.27 in TS 36.133 [15] for inter-RAT FR1 SFTD measurements.

A.8.5.1.1.2 Test Environment

Supported test configurations are shown in Table A.8.5.1.1.2-1. In this set of test cases there are two cells on different carriers. Cell 1 is E-UTRAN PCell and Cell 2 is inter-RAT NR FR1 target cell. The test parameters of cell 1 are given in clause A.8.5.1.1.2-2. The test parameters of cell 2 are given in Table A.8.5.1.1.2-3. The SFTD between PCell and target cell shall be set by the test equipment to one of the time differences in Table A.8.5.1.1.2-4.

Table A.8.5.1.1.2-1: Supported test configurations for SFTD accuracy

| Configuration | Description |
|---------------|---|
| 1 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD |
| 2 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD |
| 3 | NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD |
| 4 | NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD |
| 5 | NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD |
| 6 | NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD |

Note: The UE is only required to be tested in one of the supported test configurations

Table A.8.5.1.1.2-2: Test parameters for SFTD accuracy (Cell 1)

| Parameter | Unit | Test 1 |
|--------------------------|------|------------|
| E-UTRA RF Channel Number | | 1 |
| Duplex mode | | FDD or TDD |

| | | | |
|--|------------|---|------|
| TDD special subframe configuration ^{Note1} | | 6 | |
| TDD uplink-downlink configuration ^{Note1} | | 1 | |
| BW _{channel} | | 5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100 | |
| PDSCH parameters: DL Reference Measurement Channel ^{Note2} | | 5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD | |
| PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2} | | 5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD | |
| OCNG Patterns ^{Note2} | | 5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD | |
| PBCH_RA | dB | 0 | |
| PBCH_RB | dB | | |
| PSS_RA | dB | | |
| SSS_RA | dB | | |
| PCFICH_RB | dB | | |
| PHICH_RA | dB | | |
| PHICH_RB | dB | | |
| PDCCH_RA | dB | | |
| PDCCH_RB | dB | | |
| PDSCH_RA | dB | | |
| PDSCH_RB | dB | | |
| OCNG_RA ^{Note3} | dB | | |
| OCNG_RB ^{Note3} | dB | | |
| N _{oc} ^{Note4} | dBm/15 kHz | | -104 |
| \bar{E}_s/N_{oc} | dB | | -3 |
| \bar{E}_s/I_{ot} | dB | -3 | |
| RSRP ^{Note5} | dBm/15 kHz | -107 | |
| SCH_RP ^{Note5} | dBm/15 kHz | -107 | |
| I _o ^{Note5} | dBm/Ch BW | -74.45 +10log (N _{RB,c} /50) | |
| Propagation Condition | | AWGN | |
| Antenna Configuration | | 1x2 | |
| <p>Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].</p> <p>Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.</p> <p>Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 5: E_s/I_{ot}, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> | | | |

Table A.8.5.1.1.2-3: Test parameters for SFTD accuracy (Cell 2)

| Parameter | Config | Unit | Test 1 | |
|--|---|---------|-----------------------------|------|
| SSB GSCN | 1~6 | | freq1 | |
| Duplex mode | 1,4 | | FDD | |
| | 2,5 | | TDD | |
| | 3,6 | | TDD | |
| TDD Configuration | 1,4 | | N/A | |
| | 2,5 | | TDDConf.1.1 | |
| | 3,6 | | TDDConf.2.1 | |
| BW _{channel} | 1,4 | MHz | 10: N _{RB,c} = 52 | |
| | 2,5 | | 10: N _{RB,c} = 52 | |
| | 3,6 | | 40: N _{RB,c} = 106 | |
| PDSCH Reference measurement channel | 1,4 | | SR.1.1 FDD | |
| | 2,5 | | SR.1.1 TDD | |
| | 3,6 | | SR.2.1 TDD | |
| RMSI CORESET Reference Channel | 1,4 | | CR.1.1 FDD | |
| | 2,5 | | CR.1.1 TDD | |
| | 3,6 | | CR.2.1 TDD | |
| RMC CORESET Reference Channel | 1,4 | | CCR.1.1 FDD | |
| | 2,5 | | CCR.1.1 TDD | |
| | 3,6 | | CCR.2.1 TDD | |
| SSB configuration | 1,4 | | SSB.1 FR1 | |
| | 2,5 | | SSB.1 FR1 | |
| | 3,6 | | SSB.2 FR1 | |
| SMTC configuration | 1~6 | | SMTC.1 | |
| DL BWP configuration | 1~6 | | DLBWP.1.1 | |
| UL BWP configuration | 1~6 | | ULBWP.1.1 | |
| OCNG Patterns | 1~6 | | OP.1 | |
| EPRE ratio of PSS to SSS | 1~6 | dB | 0 | |
| EPRE ratio of PBCH DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH DMRS | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | |
| EPRE ratio of OCNG to OCNG DMRS | | | | |
| Note 1 | | | | |
| N_{oc} ^{Note2} | NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5} | 1~6 | dBm/15kHz | -104 |
| | NR_FDD_FR1_B | | | |
| | NR_TDD_FR1_C | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | |
| | NR_FDD_FR1_G | | | |
| | NR_FDD_FR1_H | | | |
| N_{oc} ^{Note2} | NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5} | 1,2,4,5 | dBm/SSB SCS | -104 |
| | NR_FDD_FR1_B | | | |
| | NR_TDD_FR1_C | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | |

| | | | | | |
|---------------------------------|---|---------|--------------|---------------|--------|
| | NR_FDD_FR1_G | 3,6 | | -101 | |
| | NR_FDD_FR1_H | | | | |
| | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 5</small> | | | | |
| | NR_FDD_FR1_B | | | | |
| | NR_TDD_FR1_C | | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | |
| | NR_FDD_FR1_G NR_FDD_FR1_H | | | | |
| \hat{E}_s / I_{ot} | | 1~6 | dB | -3 | |
| \hat{E}_s / N_{oc} | | 1~6 | dB | -3 | |
| SS-RSRP <small>Note3</small> | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 5</small> | 1,2,4,5 | dBm/SCS | -107 | |
| | NR_FDD_FR1_B | | | | |
| | NR_TDD_FR1_C | | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | |
| | NR_FDD_FR1_G | | | | |
| | NR_FDD_FR1_H | 3,6 | | -104 | |
| | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 5</small> | | | | |
| | NR_FDD_FR1_B | | | | |
| | NR_TDD_FR1_C | | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | |
| | NR_FDD_FR1_G | | | | |
| | NR_FDD_FR1_H | | | | |
| I_o <small>Note3</small> | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 5</small> | 1,2,4,5 | dBm/9.36 MHz | -74.28 | |
| | NR_FDD_FR1_B | | | | |
| | NR_TDD_FR1_C | | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | |
| | NR_FDD_FR1_G | | | | |
| | NR_FDD_FR1_H | 3,6 | | dBm/38.16 MHz | -68.18 |
| | NR_FDD_FR1_A, NR_TDD_FR1_A <small>NOTE 5</small> | | | | |
| | NR_FDD_FR1_B | | | | |
| | NR_TDD_FR1_C | | | | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | | | | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | | | | |
| | NR_FDD_FR1_G | | | | |
| | NR_FDD_FR1_H | | | | |
| Propagation condition | | 1~6 | | AWGN | |
| Antenna configuration | | 1~6 | | 1x2 | |

| | |
|---------|--|
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. |
| Note 3: | SS-RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves. |
| Note 4: | SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. |
| Note 5: | The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification. |

Table A.8.5.1.1.2-4: Timing offsets for SFTD accuracy test

| Configuration | SFN offset between PCell and PSCell | Frame boundary offset between PCell and PSCell (Ts) |
|---------------|-------------------------------------|---|
| 1 | 100 | -122000 |
| 2 | 300 | -60540 |
| 3 | 500 | 1000 |
| 4 | 700 | 62540 |
| 5 | 900 | 124000 |

A.8.5.1.1.3 Test Requirements

The SFTD reported by the UE consists of 2 elements, SFN offset and frame boundary offset between PCell and inter-RAT NR target cell. The reported SFTD accuracy shall fulfil the requirement in clause 9.1.27 in TS 36.133 [15].

A.8.5.2 E-UTRA – NR Inter-RAT Measurement Performance requirements

A.8.5.2.1 SS-RSRP

A.8.5.2.1.1 E-UTRAN – NR inter-RAT measurements with FR1 target cell

A.8.5.2.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.11.1 in TS 36.133 [15] for inter-RAT FR1 SS-RSRP measurements.

A.8.5.2.1.1.2 Test Parameters

Supported test configurations are shown in Table A.8.5.2.1.1.2-1. In this test case there are two cells on different carriers. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1. Cell 2 is the inter-RAT NR FR1 target cell. The absolute accuracy requirements of SS-RSRP inter-RAT measurement is tested by using test parameters in Table A.8.5.2.1.1.2-2.

Table A.8.5.2.1.1.2-1: SS-RSRP Inter-RAT SS-RSRP supported test configurations

| Config | Description |
|---------------|--|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.8.5.2.1.1.2-2: SS-RSRP inter-RAT test parameters

| Parameter | | Unit | Test 1 | | Test 2 | |
|--------------------------------------|----------------|------|----------------|--------|--------|--------|
| | | | Cell 1 | Cell 2 | Cell 1 | Cell 2 |
| SSB ARFCN | | | freq1 | | freq1 | |
| Duplex mode | Config 1,4 | | FDD | | | |
| | Config 2,3,5,6 | | TDD | | | |
| TDD configuration | Config 1,4 | | Not Applicable | | | |
| | Config 2,5 | | TDDConf.1.1 | | | |
| | Config 3,6 | | TDDConf.2.1 | | | |
| Downlink initial BWP configuration | | | DLBWP.0.1 | | | |
| Downlink dedicated BWP configuration | | | DLBWP.1.1 | | | |
| Uplink initial BWP configuration | | | ULBWP.0.1 | | | |
| Uplink dedicated BWP configuration | | | ULBWP.1.1 | | | |
| DRX Cycle configuration | | ms | Not Applicable | | | |
| TRS configuration | Config 1,4 | | TRS.1.1 FDD | | | |
| | Config 2,5 | | TRS.1.1 TDD | | | |
| | Config 3,6 | | TRS.1.2 TDD | | | |
| PDSCH Reference measurement channel | Config 1,4 | | - | - | - | - |
| | Config 2,5 | | - | - | - | - |
| | Config 3,6 | | - | - | - | - |
| RMSI CORESET Reference Channel | Config 1,4 | | - | - | - | - |
| | Config 2,5 | | - | - | - | - |
| | Config 3,6 | | - | - | - | - |
| Dedicated CORESET Reference Channel | Config 1,4 | | - | - | - | - |
| | Config 2,5 | | - | - | - | - |
| | Config 3,6 | | - | - | - | - |
| OCNG Patterns | | | OP.1 | | | |
| SS-RSSI-Measurement | | | Not Applicable | | | |
| SMTC configuration | | | SMTC.1 | | | |
| SSB configuration | Config 1,2,4,5 | | SSB.1 FR1 | | | |
| | Config 3,6 | | SSB.2 FR1 | | | |
| PDSCH/PDCCH subcarrier spacing | Config 1,2,4,5 | kHz | 15 | | | |
| | Config 3,6 | | 30 | | | |
| EPRE ratio of PSS to SSS | | dB | 0 | 0 | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | |

| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | | |
|--|--|--|-----------------|--------|--|------|-------------|
| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | | |
| N_{oc} Note2 | Config 1,2,4,5 | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | dBm/15k Hz | -94.65 | -117 | | |
| | | NR_FDD_FR1_B | | | -116.5 | | |
| | | NR_TDD_FR1_C | | | -116 | | |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | -115.5 | | |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | -115 | | |
| | | NR_FDD_FR1_G | | | -114 | | |
| | | NR_FDD_FR1_H | | | -113.5 | | |
| | | N_{oc} Note2 | | | Config 1,2,4,5 | | dBm/SC S |
| Config 3,6 | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | | -114 | | | | |
| | NR_FDD_FR1_B | | -113.5 | | | | |
| | NR_TDD_FR1_C | | -113 | | | | |
| | NR_FDD_FR1_D NR_TDD_FR1_D | | -112.5 | | | | |
| | NR_FDD_FR1_E NR_TDD_FR1_E | | -112 | | | | |
| | NR_FDD_FR1_G | | -111 | | | | |
| | NR_FDD_FR1_H | | -110.5 | | | | |
| | | | | | | | |
| \hat{E}_s / I_{α} | | | dB | 10 | -4 | | |
| \hat{E}_s / N_{oc} | | | dB | 10 | -4 | | |
| SS- RSRP ^{Not} e3 | Config 1,2,4,5 | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | dBm/SC S | -84.65 | -121 | | |
| | | NR_FDD_FR1_B | | | -120.5 | | |
| | | NR_TDD_FR1_C | | | -120 | | |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | -119.5 | | |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | -119 | | |
| | | NR_FDD_FR1_G | | | -118 | | |
| | | NR_FDD_FR1_H | | | -117.5 | | |
| | | Config 3,6 | | | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | -124 | |
| | NR_FDD_FR1_B | | | | -123.5 | | |
| | NR_TDD_FR1_C | | | | -123 | | |
| | NR_FDD_FR1_D NR_TDD_FR1_D | | | | -122.5 | | |
| | NR_FDD_FR1_E NR_TDD_FR1_E | | | | -122 | | |
| | NR_FDD_FR1_G | | | | -121 | | |
| | NR_FDD_FR1_H | -120.5 | | | | | |
| I_0 ^{Note3} | Config 1,2,4,5 | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | dBm/ 9.36MHz | -56.28 | -87.76 | | |
| | | NR_FDD_FR1_B | | | -87.26 | | |
| | | NR_TDD_FR1_C | | | -86.76 | | |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | -86.26 | | |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | -85.76 | | |

| | | | | |
|---|--|-----------------------|--------|--------|
| Config 3,6 | NR_FDD_FR1_G | dBm/ 38.16MHz z | -50.19 | -84.76 |
| | NR_FDD_FR1_H | | | -84.26 |
| | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | | | -84.76 |
| | NR_FDD_FR1_B | | | -84.26 |
| | NR_TDD_FR1_C | | | -83.76 |
| | NR_FDD_FR1_D NR_TDD_FR1_D | | | -83.26 |
| | NR_FDD_FR1_E NR_TDD_FR1_E | | | -82.76 |
| | NR_FDD_FR1_G | | | -81.76 |
| | NR_FDD_FR1_H | | | -81.26 |
| | Propagation condition | | | - |
| Antenna configuration | | - | 1x2 | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP, and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 5: NR operating band groups are as defined in clause 3.5.2.</p> <p>Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.</p> | | | | |

A.8.5.2.1.1.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 2 shall fulfil the requirement in clause 9.11.1 in TS 36.133 [15].

A.8.5.2.1.2 E-UTRAN – NR inter-RAT measurements with FR2 target cell

A.8.5.2.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.11.1 in TS 36.133 [15] for inter-RAT FR2 SS-RSRP measurements.

A.8.5.2.1.2.2 Test Parameters

Supported test configurations are shown in Table A.8.5.2.1.2.2-1. In this test case there are two cells on different carriers. Both absolute accuracy and relative accuracy requirements of SS-RSRP inter-RAT measurement are tested by using test setup in Table A.8.5.2.1.2.2-2 and Table A.8.5.2.1.2.2-3. In all test cases, Cell 2 is target cell. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1.

Table A.8.5.2.1.2.2-1: SS-RSRP Inter-RAT SS-RSRP supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |

Table A.8.5.2.1.2.2-2: SS-RSRP Inter-RAT general test parameters

| Parameter | Unit | Test 1 | Test 2 |
|--|------|----------------------|----------------------|
| | | Cell 2 | Cell 2 |
| SSB ARFCN | | Freq1 | freq1 |
| Duplex mode | | TDD | TDD |
| TDD configuration | | TDDConf.3.1 | TDDConf.3.1 |
| $BW_{channel}$ | MHz | 100: $N_{RB,c} = 66$ | 100: $N_{RB,c} = 66$ |
| Downlink initial BWP configuration | | DLBWP.0.1 | |
| Downlink dedicated BWP configuration | | DLBWP.1.1 | |
| Uplink initial BWP configuration | | ULBWP.0.1 | |
| Uplink dedicated BWP configuration | | ULBWP.1.1 | |
| DRX cycle configuration | ms | Not applicable | |
| TRS configuration | | TRS.2.1 TDD | |
| TCI state | | TCI.State.0 | |
| PDSCH Reference measurement channel | | - | - |
| RMSI CORESET Reference Channel | | - | - |
| OCNG Patterns | | OP.1 | OP.1 |
| SMTTC configuration | | SMTTC.1 FR2 | SMTTC.1 FR2 |
| PDSCH/PDCCH subcarrier spacing | kHz | 120 | 120 |
| EPRE ratio of PSS to SSS | dB | 0 | 0 |
| EPRE ratio of PBCH_DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | |
| \hat{E}_s / N_{oc} | dB | 10 | N/A |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> | | | |

Table A.8.5.2.1.2.2-3: SS-RSRP Inter-RAT OTA related test parameters

| Parameter | Unit | Test 1 | Test 2 |
|--------------------------------|--------------|-------------------------------|-------------------------------|
| | | Cell 2 | Cell 2 |
| Angle of arrival configuration | | Setup 1 according to A.3.15.1 | Setup 1 according to A.3.15.1 |
| N_{oc} ^{Note1} | NR_TDD_FR2_A | -100 | N/A |
| | NR_TDD_FR2_B | | N/A |
| | NR_TDD_FR2_F | | N/A |
| | NR_TDD_FR2_G | | N/A |
| | NR_TDD_FR2_T | | N/A |
| N_{oc} ^{Note1} | NR_TDD_FR2_Y | -96 | N/A |
| | NR_TDD_FR2_A | | N/A |
| | NR_TDD_FR2_B | | N/A |
| | NR_TDD_FR2_F | | N/A |
| | NR_TDD_FR2_G | | N/A |

| | | | | |
|---|--------------|-----------------------------------|-------|-------|
| | NR_TDD_FR2_T | | | N/A |
| | NR_TDD_FR2_Y | | | N/A |
| SS-RSRP ^{Note2} | NR_TDD_FR2_A | dBm/SCS ^{Note4} | -85 | Note7 |
| | NR_TDD_FR2_B | | | Note7 |
| | NR_TDD_FR2_F | | | Note7 |
| | NR_TDD_FR2_G | | | Note7 |
| | NR_TDD_FR2_T | | | Note7 |
| | NR_TDD_FR2_Y | | | Note7 |
| \hat{E}_s / I_{ot} | | dB | 11 | N/A |
| I _o ^{Note2} | NR_TDD_FR2_A | dBm/95.04 MHz ^{Note4} | -55.4 | Note8 |
| | NR_TDD_FR2_B | | | Note8 |
| | NR_TDD_FR2_F | | | Note8 |
| | NR_TDD_FR2_G | | | Note8 |
| | NR_TDD_FR2_T | | | Note8 |
| | NR_TDD_FR2_Y | | | Note8 |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone</p> <p>Note 6: NR operating band groups are as defined in clause 3.5.2.</p> <p>Note 7: SS-RSRP is applied at level the same as the minimum level specified in Table B.2.3-2 for spherical coverage.</p> <p>Note 8: I_o is applied at level $10\log_{10}(792)$ dB above the minimum level specified in Table B.2.3-2 for spherical coverage</p> | | | | |

A.8.5.2.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 2 shall fulfil the requirement in clause 9.11.1 in TS 36.133 [15].

A.8.5.2.2 SS-RSRQ

A.8.5.2.2.1 E-UTRAN – NR inter-RAT measurements with FR1 target cell

A.8.5.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.11.2 in TS 36.133 [15] for inter-RAT FR1 SS-RSRQ measurements.

A.8.5.2.2.1.2 Test Parameters

Supported test configurations are shown in Table A.8.5.2.2.1.2-1. In this test case there are two cells on different carriers. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1. Cell 2 is the inter-RAT NR FR1 target cell. The absolute accuracy requirements of SS-RSRP inter-RAT measurement is tested by using test parameters in Table A.8.5.2.2.1.2-2.

Table A.8.5.2.2.1.2-1: SS-RSRQ Inter-RAT SS-RSRQ supported test configurations

| Config | Description |
|---------------|--|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| Note: | The UE is only required to be tested in one of the supported test configurations |

Table A.8.5.2.2.1.2-2: SS-RSRQ inter-RAT test parameters

| Parameter | | Unit | Test 1 | | Test 2 | | Test 3 | |
|--|----------------|------|----------------|---|--------|---|--------|---|
| | | | Cell 2 | | Cell 2 | | Cell 2 | |
| SSB ARFCN | | | freq1 | | freq1 | | freq1 | |
| Duplex mode | Config 1,4 | | FDD | | | | | |
| | Config 2,3,5,6 | | TDD | | | | | |
| TDD configuration | Config 1,4 | | Not Applicable | | | | | |
| | Config 2,5 | | TDDConf.1.1 | | | | | |
| | Config 3,6 | | TDDConf.2.1 | | | | | |
| Downlink initial BWP configuration | | | DLBWP.0.1 | | | | | |
| Downlink dedicated BWP configuration | | | DLBWP.1.1 | | | | | |
| Uplink initial BWP configuration | | | ULBWP.0.1 | | | | | |
| Uplink dedicated BWP configuration | | | ULBWP.1.1 | | | | | |
| DRX Cycle configuration | | ms | Not Applicable | | | | | |
| TRS configuration | Config 1,4 | | TRS.1.1 FDD | | | | | |
| | Config 2,5 | | TRS.1.1 TDD | | | | | |
| | Config 3,6 | | TRS.1.2 TDD | | | | | |
| PDSCH Reference measurement channel | Config 1,4 | | - | - | - | - | - | - |
| | Config 2,5 | | - | - | - | - | - | - |
| | Config 3,6 | | - | - | - | - | - | - |
| RMSI CORESET Reference Channel | Config 1,4 | | - | - | - | - | - | - |
| | Config 2,5 | | - | - | - | - | - | - |
| | Config 3,6 | | - | - | - | - | - | - |
| Dedicated CORESET Reference Channel | Config 1,4 | | - | - | - | - | - | - |
| | Config 2,5 | | - | - | - | - | - | - |
| | Config 3,6 | | - | - | - | - | - | - |
| OCNG Patterns | | | OP.1 | | | | | |
| SS-RSSI-Measurement | | | Not Applicable | | | | | |
| SMTTC configuration | | | SMTTC.1 | | | | | |
| SSB configuration | Config 1,2,4,5 | | SSB.1 FR1 | | | | | |
| | Config 3,6 | | SSB.2 FR1 | | | | | |
| PDSCH/PDCCH subcarrier spacing | Config 1,2,4,5 | kHz | 15 | | | | | |
| | Config 3,6 | | 30 | | | | | |
| EPRE ratio of PSS to SSS | | dB | 0 | 0 | 0 | 0 | 0 | 0 |
| EPRE ratio of PBCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PBCH to PBCH DMRS | | | | | | | | |
| EPRE ratio of PDCCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PDCCH to PDCCH DMRS | | | | | | | | |
| EPRE ratio of PDSCH DMRS to SSS | | | | | | | | |
| EPRE ratio of PDSCH to PDSCH | | | | | | | | |
| EPRE ratio of OCNG DMRS to SSS(Note 1) | | | | | | | | |

| EPRE ratio of OCNG to OCNG DMRS (Note 1) | | | | | | |
|--|-------------------|--|---------------|--------|---------|--------------------------|
| N_{oc} Note2 | Config 1,2,4,5 | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | dBm/15k Hz | -80.18 | -106 | -116 |
| | | NR_FDD_FR1_B | | | | -115.5 |
| | | NR_TDD_FR1_C | | | | -115 |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | -114.5 |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | -114 |
| | | NR_FDD_FR1_G | | | | -113 |
| | | NR_FDD_FR1_H | | | | -112.5 |
| N_{oc} Note2 | Config 1,2,4,5 | | dBm/SC S | -80.18 | -106 | Same as Noc for 15kHz |
| | | | | | | |
| | Config 3,6 | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | | -83.27 | -110 | -113 |
| | | NR_FDD_FR1_B | | | | -112.5 |
| | | NR_TDD_FR1_C | | | | -112 |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | -111.5 |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | -111 |
| NR_FDD_FR1_G | -110 | | | | | |
| NR_FDD_FR1_H | -109.5 | | | | | |
| \hat{E}_s/I_{ot} | | | dB | -1.75 | -1.75 | -1.75 |
| \hat{E}_s/N_{oc} | | | dB | -1.75 | -1.75 | -1.75 |
| SS- RSRP ^{Note3} | Config 1,2,4,5 | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | dBm/SC S | -81.93 | -107.75 | -117.75 |
| | | NR_FDD_FR1_B | | | | -117.25 |
| | | NR_TDD_FR1_C | | | | -116.75 |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | -116.25 |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | -115.75 |
| | | NR_FDD_FR1_G | | | | -114.75 |
| | | NR_FDD_FR1_H | | | | -114.25 |
| | Config 3,6 | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | | -85.02 | -111.75 | -114.75 |
| | | NR_FDD_FR1_B | | | | -114.25 |
| | | NR_TDD_FR1_C | | | | -113.75 |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | -113.25 |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | -112.75 |
| | | NR_FDD_FR1_G | | | | -111.75 |
| | | NR_FDD_FR1_H | | | | -111.25 |
| SS-RSRQ ^{Note3} | | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | dB | -14.77 | -40.59 | -14.76 |
| | | NR_FDD_FR1_B | | | | |
| | | NR_TDD_FR1_C | | | | |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | |
| | | NR_FDD_FR1_G | | | | |

| | | | | | | | | |
|---|----------------|------------------------|-----------------------|------|--------|--|--------|--------|
| I _o ^{Note3} | Config 1,2,4,5 | NR_FDD_FR1_H | dBm/ 9.36MHz | -50 | -75.83 | | | |
| | | NR_FDD_FR1_A | | | | | -85.83 | |
| | | NR_TDD_FR1_A NOTE 6 | | | | | | |
| | | NR_FDD_FR1_B | | | | | -85.33 | |
| | | NR_TDD_FR1_C | | | | | -84.83 | |
| | | NR_FDD_FR1_D | | | | | -84.33 | |
| | | NR_TDD_FR1_D | | | | | | |
| | NR_FDD_FR1_E | -83.83 | | | | | | |
| | NR_TDD_FR1_E | | | | | | | |
| | NR_FDD_FR1_G | -82.83 | | | | | | |
| | NR_FDD_FR1_H | -82.33 | | | | | | |
| | Config 3,6 | NR_FDD_FR1_A | dBm/ 38.16MHz z | -50 | -76.73 | | | |
| | | NR_TDD_FR1_A NOTE 6 | | | | | | -79.73 |
| | | NR_FDD_FR1_B | | | | | | -79.23 |
| NR_TDD_FR1_C | | -78.73 | | | | | | |
| NR_FDD_FR1_D | | -78.23 | | | | | | |
| NR_TDD_FR1_D | | | | | | | | |
| NR_FDD_FR1_E | | -77.73 | | | | | | |
| NR_TDD_FR1_E | | | | | | | | |
| NR_FDD_FR1_G | -76.73 | | | | | | | |
| NR_FDD_FR1_H | -76.53 | | | | | | | |
| Propagation condition | | | - | AWGN | | | | |
| Antenna configuration | | | - | 1x2 | | | | |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-RSRQ, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-RSRQ minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 5: NR operating band groups are as defined in clause 3.5.2.</p> <p>Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.</p> | | | | | | | | |

A.8.5.2.2.1.3 Test Requirements

The SS-RSRQ measurement accuracy for Cell 2 shall fulfil the requirement in clause 9.11.2 in TS 36.133 [15].

A.8.5.2.2.2 E-UTRAN – NR inter-RAT measurements with FR2 target cell

A.8.5.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.11.2 in TS 36.133 [15] for inter-RAT FR2 SS-RSRQ measurements.

A.8.5.2.2.2.2 Test Parameters

Supported test configurations are shown in Table A.8.5.2.2.2.2-1. In this test case there are two cells on different carriers. Both absolute accuracy and relative accuracy requirements of SS-RSRQ inter-RAT measurement are tested by using test setup in Table A.8.5.2.2.2.2-2 and Table A.8.5.2.2.2.2-3. In all test cases, Cell 2 is target cell. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1.

Table A.8.5.2.2.2-1: SS-RSRQ Inter-RAT SS-RSRQ supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |

Table A.8.5.2.2.2-2: SS-RSRQ Inter-RAT general test parameters

| Parameter | Unit | Test 1 | Test 2 |
|---|------|----------------------|----------------------|
| | | Cell 2 | Cell 2 |
| SSB ARFCN | | Freq1 | freq1 |
| Duplex mode | | TDD | TDD |
| TDD configuration | | TDDConf.3.1 | TDDConf.3.1 |
| $BW_{channel}$ | MHz | 100: $N_{RB,c} = 66$ | 100: $N_{RB,c} = 66$ |
| Downlink initial BWP configuration | | DLBWP.0.1 | |
| Downlink dedicated BWP configuration | | DLBWP.1.1 | |
| Uplink initial BWP configuration | | ULBWP.0.1 | |
| Uplink dedicated BWP configuration | | ULBWP.1.1 | |
| DRX cycle configuration | ms | Not applicable | |
| TRS configuration | | TRS.2.1 TDD | |
| TCI state | | TCI.State.0 | |
| PDSCH Reference measurement channel | | - | - |
| RMSI CORESET Reference Channel | | - | - |
| OCNG Patterns | | OP.1 | OP.1 |
| SMTTC configuration | | SMTTC.1 FR2 | SMTTC.1 FR2 |
| PDSCH/PDCCH subcarrier spacing | kHz | 120 | 120 |
| EPRE ratio of PSS to SSS | dB | 0 | 0 |
| EPRE ratio of PBCH_DMRS to SSS | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | |
| \hat{E}_s / N_{oc} | dB | -0.5 | -1.75 |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-SINR, SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> | | | |

Table A.8.5.2.2.2-3: SS-RSRQ Inter-RAT OTA related test parameters

| Parameter | | Unit | Test 1 | Test 2 |
|--|--------------|--------------------------------|-------------------------------|-------------------------------|
| | | | Cell 2 | Cell 2 |
| Angle of arrival configuration | | | Setup 1 according to A.3.15.1 | Setup 1 according to A.3.15.1 |
| N_{oc} ^{Note1} | NR_TDD_FR2_A | dBm/15kHz ^{Note4} | -105 | Note7 |
| | NR_TDD_FR2_B | | | Note7 |
| | NR_TDD_FR2_F | | | Note7 |
| | NR_TDD_FR2_G | | | Note7 |
| | NR_TDD_FR2_T | | | Note7 |
| N_{oc} ^{Note1} | NR_TDD_FR2_A | dBm/SCS ^{Note3} | -96 | Note7 |
| | NR_TDD_FR2_B | | | Note7 |
| | NR_TDD_FR2_F | | | Note7 |
| | NR_TDD_FR2_G | | | Note7 |
| | NR_TDD_FR2_T | | | Note7 |
| SS-RSRP ^{Note2} | NR_TDD_FR2_A | dBm/SCS ^{Note4} | -96.5 | Note8 |
| | NR_TDD_FR2_B | | | Note8 |
| | NR_TDD_FR2_F | | | Note8 |
| | NR_TDD_FR2_G | | | Note8 |
| | NR_TDD_FR2_T | | | Note8 |
| SS-RSRQ ^{Note2} | NR_TDD_FR2_A | dB | -14.4 | -14.82 |
| | NR_TDD_FR2_B | | | -14.82 |
| | NR_TDD_FR2_F | | | -14.82 |
| | NR_TDD_FR2_G | | | -14.82 |
| | NR_TDD_FR2_T | | | -14.82 |
| \hat{E}_s / I_{ot} | NR_TDD_FR2_A | dB | -0.5 | -1.75 |
| | NR_TDD_FR2_B | | | |
| | NR_TDD_FR2_F | | | |
| | NR_TDD_FR2_G | | | |
| | NR_TDD_FR2_T | | | |
| I_o ^{Note2} | NR_TDD_FR2_A | dBm/95.04 MHz ^{Note4} | -63.9 | Note 9 |
| | NR_TDD_FR2_B | | | Note 9 |
| | NR_TDD_FR2_F | | | Note 9 |
| | NR_TDD_FR2_G | | | Note 9 |
| | NR_TDD_FR2_T | | | Note 9 |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-RSRQ, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone</p> <p>Note 6: NR operating band groups are as defined in clause 3.5.2.</p> <p>Note 7: N_{oc} for SCS 15kHz is applied at level $-10\log_{10}(8)+4$dB above the minimum level specified in Table B.2.3-2 for spherical coverage. N_{oc} for SCS 120kHz is applied at 4 dB above the minimum level specified in Table B.2.3-2 for spherical coverage.</p> <p>Note 8: SS_RSRP is applied at level 2.25dB above the minimum level specified in Table B.2.3-2 for spherical coverage.</p> <p>Note 9: I_o is applied at level $10\log_{10}(792)+6.22$dB above the minimum level specified in Table B.2.3-2 for spherical coverage.</p> | | | | |

A.8.5.2.2.3 Test Requirements

The SS-RSRQ measurement accuracy for Cell 2 shall fulfil the requirement in clause 9.11.2 in TS 36.133 [15].

In this test case there are two cells on different carriers and measurement gaps are provided

A.8.5.2.3 SS-SINR

A.8.5.2.3.1 E-UTRAN – NR inter-RAT measurements with FR1 target cell

A.8.5.2.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS- SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.11.3 in TS 36.133 [15] for inter-RAT FR1 SS-SINR measurements.

A.8.5.2.3.1.2 Test Parameters

Supported test configurations are shown in Table A.8.5.2.3.1.2-1. In this test case there are two cells on different carriers. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1. Cell 2 is the inter-RAT NR FR1 target cell. The absolute accuracy requirements of SS-RSRP inter-RAT measurement is tested by using test parameters in Table A.8.5.2.3.1.2-2.

Table A.8.5.2.3.1.2-1: SS- SINR Inter-RAT SS- SINR supported test configurations

| Config | Description |
|--------|---|
| 1 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 2 | LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 3 | LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |
| 4 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode |
| 5 | LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode |
| 6 | LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode |

Note: The UE is only required to be tested in one of the supported test configurations

Table A.8.5.2.3.1.2-2: SS-SINR inter-RAT test parameters

| Parameter | | Unit | Test 1 | Test 2 | Test 3 |
|--------------------------------------|----------------|------|----------------|--------|--------|
| | | | Cell 2 | Cell 2 | Cell 2 |
| SSB ARFCN | | | freq1 | freq1 | freq1 |
| Duplex mode | Config 1,4 | | FDD | | |
| | Config 2,3,5,6 | | TDD | | |
| TDD configuration | Config 1,4 | | Not Applicable | | |
| | Config 2,5 | | TDDConf.1.1 | | |
| | Config 3,6 | | TDDConf.2.1 | | |
| Downlink initial BWP configuration | | | DLBWP.0.1 | | |
| Downlink dedicated BWP configuration | | | DLBWP.1.1 | | |
| Uplink initial BWP configuration | | | ULBWP.0.1 | | |
| Uplink dedicated BWP configuration | | | ULBWP.1.1 | | |
| DRX Cycle configuration | | ms | Not Applicable | | |
| TRS configuration | Config 1,4 | | TRS.1.1 FDD | | |
| | Config 2,5 | | TRS.1.1 TDD | | |
| | Config 3,6 | | TRS.1.2 TDD | | |
| PDSCH Reference measurement channel | Config 1,4 | | - | - | - |
| | Config 2,5 | | - | - | - |
| | Config 3,6 | | - | - | - |

| | | | | | | | |
|---------------------------------|----------------|--|-----------------|------------------|----------|----------|---------|
| SS-RSRP ^{Note3} | Config 1,2,4,5 | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | dBm/SC S | [-81.75] | [-88.5] | [-123.5] | |
| | | NR_FDD_FR1_B | | | | [-123] | |
| | | NR_TDD_FR1_C | | | | [-122.5] | |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | [-122] | |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | [-121.5] | |
| | | NR_FDD_FR1_G | | | | [-120.5] | |
| | | NR_FDD_FR1_H | | | | [-120] | |
| | Config 3,6 | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | | [-78.75] | [-85.5] | [-120.5] | |
| | | NR_FDD_FR1_B | | | | [-120] | |
| | | NR_TDD_FR1_C | | | | [-119.5] | |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | [-119] | |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | [-118.5] | |
| | | NR_FDD_FR1_G | | | | [-117.5] | |
| | | NR_FDD_FR1_H | | | | [-117] | |
| SS-SINR ^{Note3} | | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | dB | [-1.75] | [20] | [-4.0] | |
| | | NR_FDD_FR1_B | | | | | |
| | | NR_TDD_FR1_C | | | | | |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | | |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | | |
| | | NR_FDD_FR1_G | | | | | |
| | | NR_FDD_FR1_H | | | | | |
| I _o ^{Note3} | Config 1,2,4,5 | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | dBm/ 9.36MHz | [-49.83] | [-60.5] | [-90.09] | |
| | | NR_FDD_FR1_B | | | | [-89.59] | |
| | | NR_TDD_FR1_C | | | | [-89.09] | |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | [-88.59] | |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | [-88.09] | |
| | | NR_FDD_FR1_G | | | | [-87.09] | |
| | | NR_FDD_FR1_H | | | | [-86.59] | |
| | Config 3,6 | NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6 | | dBm/ 38.16MHz | [-43.73] | [-54.41] | [-84] |
| | | NR_FDD_FR1_B | | | | | [-83.5] |
| | | NR_TDD_FR1_C | | | | | [-83] |
| | | NR_FDD_FR1_D NR_TDD_FR1_D | | | | | [-82.5] |
| | | NR_FDD_FR1_E NR_TDD_FR1_E | | | | | [-82] |
| | | NR_FDD_FR1_G | | | | | [-81] |
| | | NR_FDD_FR1_H | | | | | [-80.5] |
| Propagation condition | | | - | AWGN | | | |
| Antenna configuration | | | - | 1x2 | | | |

| | |
|---------|--|
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. |
| Note 3: | SS-SINR, SS-RSRP, and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves. |
| Note 4: | SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. |
| Note 5: | NR operating band groups are as defined in clause 3.5.2. |
| Note 6: | The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification |

A.8.5.2.3.1.3 Test Requirements

The SS-SINR measurement accuracy for Cell 2 shall fulfil the requirement in clause 9.11.3 in TS 36.133 [15].

A.8.5.2.3.2 E-UTRAN – NR inter-RAT measurements with FR2 target cell

A.8.5.2.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS- SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.11.3 in TS 36.133 [15] for inter-RAT FR2 SS-SINR measurements.

A.8.5.2.3.2.2 Test Parameters

Supported test configurations are shown in Table A.8.5.2.3.2.2-1. In this test case there are two cells on different carriers. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-RAT measurement are tested by using test setup in Table A.8.5.2.3.2.2-2 and A.8.5.2.3.2.2-3. In all test cases, Cell 2 is target cell. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1.

Table A.8.5.2.3.2.2-1: SS-SINR Inter-RAT SS-SINR supported test configurations

| Configuration | Description |
|---------------|---|
| 1 | LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |
| 2 | LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode |

Table A.8.5.2.3.2.2-2: SS-SINR Inter-RAT general test parameters

| Parameter | Unit | Test 1 | Test 2 | Test 3 |
|--|------|-----------------------------|-----------------------------|-----------------------------|
| | | Cell 2 | Cell 2 | Cell 2 |
| SSB ARFCN | | Freq1 | freq1 | freq1 |
| Duplex mode | | TDD | TDD | TDD |
| TDD configuration | | TDDConf.3.1 | TDDConf.3.1 | TDDConf.3.1 |
| BW _{channel} | MHz | 100: N _{RB,c} = 66 | 100: N _{RB,c} = 66 | 100: N _{RB,c} = 66 |
| Downlink initial BWP configuration | | DLBWP.0.1 | | |
| Downlink dedicated BWP configuration | | DLBWP.1.1 | | |
| Uplink initial BWP configuration | | ULBWP.0.1 | | |
| Uplink dedicated BWP configuration | | ULBWP.1.1 | | |
| DRX cycle configuration | ms | Not applicable | | |
| TRS configuration | | TRS.2.1 TDD | | |
| TCI state | | TCI.State.0 | | |
| PDSCH Reference measurement channel | | - | - | - |
| RMSI CORESET Reference Channel | | - | - | - |
| OCNG Patterns | | OP.1 | OP.1 | OP.1 |
| SMTC configuration | | SMTC.1 FR2 | SMTC.1 FR2 | SMTC.1 FR2 |
| PDSCH/PDCCH subcarrier spacing | kHz | 120 | 120 | 120 |
| EPRE ratio of PSS to SSS | dB | 0 | 0 | 0 |
| EPRE ratio of PBCH_DMRS to SSS | | | | |
| EPRE ratio of PBCH to PBCH_DMRS | | | | |
| EPRE ratio of PDCCH_DMRS to SSS | | | | |
| EPRE ratio of PDCCH to PDCCH_DMRS | | | | |
| EPRE ratio of PDSCH_DMRS to SSS | | | | |
| EPRE ratio of PDSCH to PDSCH_DMRS | | | | |
| EPRE ratio of OCNG DMRS to SSS ^{Note 1} | | | | |
| \hat{E}_s / N_{oc} | dB | -0.5 | 11.0 | -3.0 |
| <p>Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.</p> <p>Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 3: SS-SINR, SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 4: SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> | | | | |

Table A.8.5.2.3.2-3: SS-SINR Inter-RAT OTA related test parameters

| Parameter | | Unit | Test 1 | Test 2 | Test 3 |
|---|--------------|-----------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| | | | Cell 2 | Cell 2 | Cell 2 |
| Angle of arrival configuration | | | Setup 1 according to A.3.15.1 | Setup 1 according to A.3.15.1 | Setup 1 according to A.3.15.1 |
| N_{oc} ^{Note1} | NR_TDD_FR2_A | dBm/15kHz ^{Note4} | -105 | -105 | Note7 |
| | NR_TDD_FR2_B | | | | Note7 |
| | NR_TDD_FR2_F | | | | Note7 |
| | NR_TDD_FR2_G | | | | Note7 |
| | NR_TDD_FR2_T | | | | Note7 |
| | NR_TDD_FR2_Y | | | | Note7 |
| N_{oc} ^{Note1} | NR_TDD_FR2_A | dBm/SCS ^{Note3} | -96 | -96 | Note7 |
| | NR_TDD_FR2_B | | | | Note7 |
| | NR_TDD_FR2_F | | | | Note7 |
| | NR_TDD_FR2_G | | | | Note7 |
| | NR_TDD_FR2_T | | | | Note7 |
| | NR_TDD_FR2_Y | | | | Note7 |
| SS-RSRP ^{Note2} | NR_TDD_FR2_A | dBm/SCS ^{Note4} | -96.5 | -85 | Note8 |
| | NR_TDD_FR2_B | | | | Note8 |
| | NR_TDD_FR2_F | | | | Note8 |
| | NR_TDD_FR2_G | | | | Note8 |
| | NR_TDD_FR2_T | | | | Note8 |
| | NR_TDD_FR2_Y | | | | Note8 |
| SS-SINR ^{Note2} | NR_TDD_FR2_A | dB | -0.5 | 11 | -3.0 |
| | NR_TDD_FR2_B | | | | -3.0 |
| | NR_TDD_FR2_F | | | | -3.0 |
| | NR_TDD_FR2_G | | | | -3.0 |
| | NR_TDD_FR2_T | | | | -3.0 |
| | NR_TDD_FR2_Y | | | | -3.0 |
| \hat{E}_s/I_{ot} | | dB | -0.5 | 11 | -3.0 |
| I_o ^{Note2} | NR_TDD_FR2_A | dBm/95.04 MHz ^{Note4} | -69.3 | -55.4 | Note9 |
| | NR_TDD_FR2_B | | | | Note9 |
| | NR_TDD_FR2_F | | | | Note9 |
| | NR_TDD_FR2_G | | | | Note9 |
| | NR_TDD_FR2_T | | | | Note9 |
| | NR_TDD_FR2_Y | | | | Note9 |
| <p>Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.</p> <p>Note 2: SS-SINR, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.</p> <p>Note 3: SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.</p> <p>Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone</p> <p>Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone</p> <p>Note 6: NR operating band groups are as defined in clause 3.5.2.</p> <p>Note 7: N_{oc} for SCS 15kHz is applied at level $-10\log_{10}(8)+4$dB above the minimum level specified in Table B.2.3-2 for spherical coverage. N_{oc} for SCS 120kHz is applied at 4 dB above the minimum level specified in Table B.2.3-2 for spherical coverage.</p> <p>Note 8: SS-RSRP is applied at level 3dB above the minimum level specified in Table B.2.3-2 for spherical coverage.</p> <p>Note 9: I_o is applied at level $10\log_{10}(792)+6.54$dB above the minimum level specified in Table B.2.3-2 for spherical coverage.</p> | | | | | |

A.8.5.2.3.2.3 Test Requirements

The SS-SINR measurement accuracy for Cell 2 shall fulfil the requirement in clause 9.11.3 in TS 36.133 [15].

Annex B (normative): Conditions for RRM requirements applicability for operating bands

B.1 Conditions for NR RRC_IDLE state mobility

B.1.1 Introduction

In Annex B.1, the following conditions are specified:

- UE conditions which shall apply for UE intra-frequency measurements procedures and requirements in clause 4,
- UE conditions which shall apply for UE inter-frequency measurements procedures and requirements in clause 4.

B.1.2 Conditions for measurements on NR intra-frequency cells for cell re-selection

This clause defines the following conditions for NR intra-frequency measurements performed based on SSBs for cell re-selection: SSB_{RP} and SSB \dot{E}_s/I_{ot} , applicable for a corresponding operating band.

The conditions are defined in Table B.1.2-1 for FR1 NR cells.

The conditions are defined in Table B.1.2-2 for FR2 NR cells.

Table B.1.2-1: Conditions for intra-frequency cell re-selection in FR1

| Parameter | NR operating band groups ^{Note1} | Minimum SSB _{RP} | | SSB \dot{E}_s/I_{ot} |
|------------|---|-----------------------------|-----------------------------|------------------------|
| | | dBm / SCS _{SSB} | | dB |
| | | SCS _{SSB} = 15 kHz | SCS _{SSB} = 30 kHz | |
| Conditions | NR_FDD_FR1_A, NR_TDD_FR1_A | -124 | -121 | ≥ -4 |
| | NR_FDD_FR1_B | -123.5 | -120.5 | |
| | NR_TDD_FR1_C | -123 | -120 | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | -122.5 | -119.5 | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | -122 | -119 | |
| | NR_FDD_FR1_G | -121 | -118 | |
| | NR_FDD_FR1_H | -120.5 | -117.5 | |

NOTE 1: NR operating band groups are defined in clause 3.5.2.

Table B.1.2-2: Conditions for intra-frequency cell re-selection in FR2

| Parameter | Angle of arrival | NR operating bands | Minimum SSB _{RP} ^{Note 2, Note 3} | | | | SSB \hat{E}_s/lot | |
|------------|--------------------------------------|--------------------|---|------------|------------------------------|---------------------------|---|-----|
| | | | dBm / SCS _{SSB} | | | | dB | |
| | | | SCS _{SSB} = 120 kHz | | SCS _{SSB} = 240 kHz | | | |
| | | | UE Power class | | UE Power class | | | |
| 1 | 2 | 3 | 4 | 1, 2, 3, 4 | | | | |
| Conditions | Rx Beam Peak | n257 | - 125.3+Y ₁ | -110.8 | -109.1 | - 124.8+Y ₄ | (Value for SCS _{SSB} = 120 kHz) +3dB | ≥-4 |
| | | n258 | - 125.3+Y ₁ | -110.8 | -109.1 | - 124.8+Y ₄ | | |
| | | n260 | - 122.3+Y ₁ | | -106.5 | - 122.8+Y ₄ | | |
| | | n261 | - 125.3+Y ₁ | -110.8 | -109.1 | - 124.8+Y ₄ | | |
| | Spherical coverage ^{Note 1} | n257 | - 117.3+Z ₁ | -99.8 | -98.2 | - 115.8+Z ₄ | (Value for SCS _{SSB} = 120 kHz) +3dB | ≥-4 |
| | | n258 | - 117.3+Z ₁ | -99.8 | -98.2 | - 115.8+Z ₄ | | |
| | | n260 | - 114.3+Z ₁ | | -93.9 | - 110.8+Z ₄ | | |
| | | n261 | - 117.3+Z ₁ | -99.8 | -98.2 | - 115.8+Z ₄ | | |

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.

NOTE 2: Values specified at the Reference point to give minimum SSB \hat{E}_s/lot , with no applied noise.

NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by ΣMB_P and Spherical coverage values are increased by ΣMB_S , the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.1.2-2:

- The value of Y for Power classes 1 and 4 is FFS, where Y₁ and Y₄ are the rough/fine beam gain differences in Rx beam peak direction for Power classes 1 and 4 respectively
- The value of Z for Power classes 1 and 4 is FFS, where Z₁ and Z₄ are the rough/fine beam gain differences in spherical coverage directions for Power classes 1 and 4 respectively

B.1.3 Conditions for measurements on NR inter-frequency cells for cell re-selection

This clause defines the following conditions for NR inter-frequency measurements performed based on SSBs for cell re-selection: SSB_{RP} and SSB \hat{E}_s/lot , applicable for a corresponding operating band.

The conditions defined in Table B.1.2-1 for FR1 NR intra-frequency cell re-selection shall also apply for FR1 NR inter-frequency cells in this clause.

The conditions defined in Table B.1.2-2 for FR2 NR intra-frequency cell re-selection shall also apply for FR2 NR inter-frequency cells in this clause.

B.2 Conditions for UE measurements procedures and performance requirements in RRC_CONNECTED state

B.2.1 Introduction

B.2.1.1 General

In Annex B.2, the following conditions are specified:

- The conditions for RRC connection release with redirection to NR requirements in clause 6.2.3.2.1,
- The conditions for UE transmit timing adjustment in clause 7.1,
- UE conditions which shall apply for UE intra-frequency measurements procedures and requirements in clause 9, UE conditions which shall apply for UE inter-frequency measurements procedures and requirements in clause 9,
- UE conditions which shall apply for UE intra-frequency measurements performance requirements in clause 10,
- UE conditions which shall apply for UE inter-frequency measurements performance requirements in clause 10.

B.2.1.2 Derivation of Minimum SSB_RP values for FR1

[FFS]

B.2.1.3 Derivation of Minimum SSB_RP values for FR2

Editor's note:

- The Assumption for UE beams (fine or rough) in Annex A RRM test cases is defined based on power class 3, and unless otherwise stated also applies for other UE power classes

B.2.1.3.1 Minimum SSB_RP values for Rx Beam Peak angle of arrival

Minimum SSB_RP values in Tables B.2.2-2 and B.2.3-2 are based on reference sensitivity for the Operating band and for the UE power class, taking a baseline of UE power class 3 in Band n260 with 50 MHz channel bandwidth.

Minimum SSB_RP = Reference sensitivity_{PC3, n260, 50MHz} + Y - 10Log₁₀(PRB_{Refsens} × 12) - SNR_{Refsens} + SSB Ês/Iot + ΣMBP

where:

Reference sensitivity_{PC3, n260, 50MHz} is the reference sensitivity value in dBm specified for power class 3 in Band n260 for 50 MHz Channel bandwidth in Table 7.3.2.3-1 of TS 38.101-2 [19];

Y is the gain difference between fine and rough beams, which is defined in Table B.2.1.3.1-1;

Table B.2.1.3.1-1: Gain difference Y between fine and rough beams, Rx beam peak direction

| Value "Y" in dB, for each UE power class | | | |
|--|-----|-----|-----|
| 1 | 2 | 3 | 4 |
| FFS | 9.0 | 7.0 | FFS |

PRB_{Refsens} is N_{RB} associated with subcarrier spacing 120 kHz for 50MHz in TS 38.101-2 [19] Table 5.3.2-1, and is 32;

12 is the number of subcarriers in a PRB;

SNR_{Refsens} is the SNR used for simulation of Refsens and EIS spherical coverage, and is -1 dB;

SSB Ês/Iot is the minimum value required by the UE to perform measurements, and is -6 dB for intra-frequency measurements and -4 dB for inter-frequency measurements. The only contribution to Iot is the UE internal noise;

ΣMB_P is the UE multi-band relaxation factor value in dB specified in TS 38.101-2 [19] clause 6.2.1.

The calculated Minimum SSB_RP value for the baseline of UE power class 3 in Band n260 is $(-109.5 + \Sigma MB_P)$ dBm/120kHz for intra-frequency measurements and $(-107.5 + \Sigma MB_P)$ dBm/120kHz for inter-frequency measurements.

The following methodology to define the Minimum SSB_RP level for power class X (PC_X) and operating band Y (Band_Y) is used:

For Intra-frequency: Minimum SSB_RP (PC_X, Band_Y) = -109.5 dBm/120kHz + Refsens_{PC_X, Band_Y, 50MHz} – Refsens_{PC3, n260, 50MHz} + $Y_{PC_X} - Y_{PC3} + \Sigma MB_P$,

For Inter-frequency: Minimum SSB_RP (PC_X, Band_Y) = -107.5 dBm/120kHz + Refsens_{PC_X, Band_Y, 50MHz} – Refsens_{PC3, n260, 50MHz} + $Y_{PC_X} - Y_{PC3} + \Sigma MB_P$.

B.2.1.3.2 Minimum SSB_RP values for angle of arrival within Spherical coverage

Minimum SSB_RP values in Tables B.2.2-2 and B.2.3-2 are based on EIS spherical coverage for the Operating band and for the UE power class, taking a baseline of UE power class 3 in Band n260 with 50 MHz channel bandwidth.

Minimum SSB_RP = EIS spherical coverage_{PC3, n260, 50MHz} + $Z - 10 \log_{10}(\text{PRB}_{\text{Refsens}} \times 12) - \text{SNR}_{\text{Refsens}} + \text{SSB } \hat{E}_s/\text{Iot} + \Sigma MB_S$,

where:

EIS spherical coverage_{PC3, n260, 50MHz} is the EIS spherical coverage value in dBm specified for power class 3 in Band n260 for 50MHz Channel bandwidth in TS 38.101-2 [19] Table 7.3.4.3-1;

Z is the gain difference between fine and rough beams, and is defined in Table B.2.1.3.2-1;

Table B.2.1.3.2-1: Gain difference Z between fine and rough beams, Spherical coverage directions

| Value "Z" in dB, for each UE power class | | | |
|--|-----|-----|-----|
| 1 | 2 | 3 | 4 |
| FFS | 9.0 | 7.0 | FFS |

$\text{PRB}_{\text{Refsens}}$ is N_{RB} associated with subcarrier spacing 120 kHz for 50MHz in TS 38.101-2 [19] Table 5.3.2-1, and is 32;

12 is the number of subcarriers in a PRB;

$\text{SNR}_{\text{Refsens}}$ is the SNR used for simulation of Refsens and EIS spherical coverage, and is -1 dB;

$\text{SSB } \hat{E}_s/\text{Iot}$ is the minimum value required by the UE to perform measurements, and is -6 dB for intra-frequency measurements and -4 dB for inter-frequency measurements. The only contribution to Iot is the UE internal noise;

ΣMB_S is the UE multi-band relaxation factor value in dB specified in TS 38.101-2 [19] clause 6.2.1.

The calculated Minimum SSB_RP value for the baseline of UE power class 3 in Band n260 is $(-96.9 + \Sigma MB_S)$ dBm/120kHz for intra-frequency measurements and is $(-94.9 + \Sigma MB_S)$ dBm/120kHz for inter-frequency measurements.

The following methodology to define the Minimum SSB_RP level for power class X (PC_X) and operating band Y (Band_Y) is used:

For Intra-frequency: Minimum SSB_RP (PC_X, Band_Y) = $(-103.9 + \Sigma MB_S + Z)$ dBm/120 kHz + Refsens_{PC_X, Band_Y, 50MHz} – Refsens_{PC3, n260, 50MHz} + $Z_{PC_X} - Z_{PC3} + \Sigma MB_S$,

For Inter-frequency: Minimum SSB_RP (PC_X, Band_Y) = $(-101.9 + \Sigma MB_S + Z)$ dBm/120 kHz + Refsens_{PC_X, Band_Y, 50MHz} – Refsens_{PC3, n260, 50MHz} + $Z_{PC_X} - Z_{PC3} + \Sigma MB_S$

B.2.1.4 Gain to SS-RSRP measurement point for FR1

In FR1 conducted requirements are specified at the UE antenna connector, which is also the SS-RSRP measurement point.

B.2.1.5 Gain to SS-RSRP measurement point for FR2

B.2.1.5.1 Gain to SS-RSRP measurement point for Rx Beam Peak angle of arrival

In clause 5.1.1 of TS 38.215 [4] SS-RSRP is defined to be measured based on the combined signal from antenna elements corresponding to a given receiver branch. The reference point for requirement parameters from the UE perspective is the input of the UE antenna array. The gain “G” relates the combined signal from antenna elements corresponding to a given receiver branch to the reference point for requirement parameters.

The gain “G” affects absolute signal level values reported by the UE.

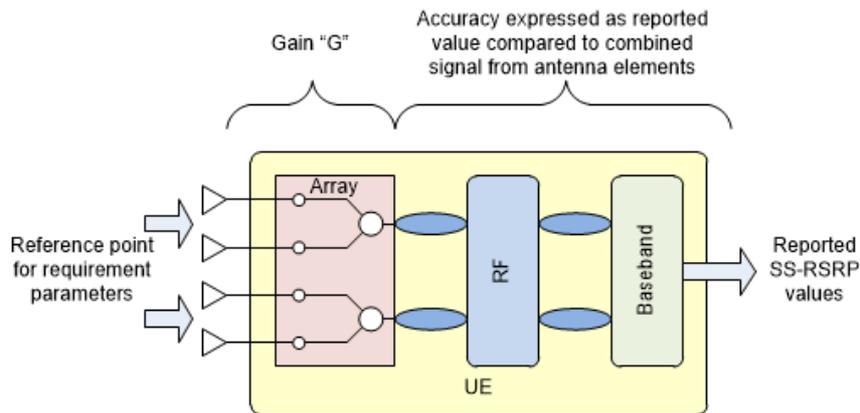


Figure B.2.1.5.1-1: Gain and Reference point for requirement parameters

The gain range for each power class is specified in Table B.2.1.5.1-1.

Table B.2.1.5.1-1: UE gain G, Rx beam peak direction

| | UE Power class | | | |
|--------------|----------------|-----|-----|-----|
| | 1 | 2 | 3 | 4 |
| Minimum, dBi | FFS | FFS | -10 | FFS |
| Maximum, dBi | FFS | FFS | +20 | FFS |

Gain range in spherical coverage directions may be lower than in Rx beam peak direction, according to the difference between the EIS spherical coverage value specified in TS 38.101-2 [19] clause 7.3.4 and the Reference sensitivity level specified in TS 38.101-2 [19] clause 7.3.2.

B.2.2 Conditions for NR intra-frequency measurements

This clause defines the following conditions for NR intra-frequency measurements and corresponding procedures performed based on SSBs: SSB_{RP} and SSB_{Ês/Iot}, applicable for a corresponding operating band.

The conditions are defined in Table B.2.2-1 for FR1 NR cells.

The conditions are defined in Table B.2.2-2 for FR2 NR cells.

Table B.2.2-1: Conditions for intra-frequency measurements in FR1

| Parameter | NR operating band groups ^{Note1} | Minimum SSB _{RP} | | SSB \hat{E}_s/lot |
|------------|---|-----------------------------|-----------------------------|----------------------------|
| | | dBm / SCS _{SSB} | | |
| | | SCS _{SSB} = 15 kHz | SCS _{SSB} = 30 kHz | dB |
| Conditions | NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A | -127 | -124 | ≥ -6 |
| | NR_FDD_FR1_B | -126.5 | -123.5 | |
| | NR_TDD_FR1_C | -126 | -123 | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | -125.5 | -122.5 | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | -125 | -122 | |
| | NR_FDD_FR1_G | -124 | -121 | |
| | NR_FDD_FR1_H | -123.5 | -120.5 | |

NOTE 1: NR operating band groups are defined in clause 3.5.2.

Table B.2.2-2: Conditions for intra-frequency measurements in FR2

| Parameter | Angle of arrival | NR operating bands | Minimum SSB _{RP} ^{Note 2, Note 3} | | | | SSB \hat{E}_s/lot | |
|------------|--------------------------------------|--------------------|---|--------|--------|------------------------------|---|------------|
| | | | dBm / SCS _{SSB} | | | | | |
| | | | SCS _{SSB} = 120 kHz | | | SCS _{SSB} = 240 kHz | dB | |
| | | | UE power class | | | UE power class | | |
| | | | 1 | 2 | 3 | 4 | | 1, 2, 3, 4 |
| Conditions | Rx Beam Peak | n257 | - 128.3+Y ₁ | -113.8 | -112.1 | - 127.8+Y ₄ | (Value for SCS _{SSB} = 120 kHz) +3dB | ≥ -6 |
| | | n258 | - 128.3+Y ₁ | -113.8 | -112.1 | - 127.8+Y ₄ | | |
| | | n260 | - 125.3+Y ₁ | | -109.5 | - 125.8+Y ₄ | | |
| | | n261 | - 128.3+Y ₁ | -113.8 | -112.1 | - 127.8+Y ₄ | | |
| | Spherical coverage ^{Note 1} | n257 | - 120.3+Z ₁ | -102.8 | -101.2 | - 118.8+Z ₄ | (Value for SCS _{SSB} = 120 kHz) +3dB | ≥ -6 |
| | | n258 | - 120.3+Z ₁ | -102.8 | -101.2 | - 118.8+Z ₄ | | |
| | | n260 | - 117.3+Z ₁ | | -96.9 | - 113.8+Z ₄ | | |
| | | n261 | - 120.3+Z ₁ | -102.8 | -101.2 | - 118.8+Z ₄ | | |

Note 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.

Note 2: Values specified at the Reference point to give minimum SSB \hat{E}_s/lot , with no applied noise.

Note 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by ΣMB_P and Spherical coverage values are increased by ΣMB_S , the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.2.2-2:

- The value of Y for power classes 1 and 4 is FFS, where Y₁ and Y₄ are the rough/fine beam gain differences in Rx beam peak direction for power classes 1 and 4 respectively
- The value of Z for power classes 1 and 4 is FFS, where Z₁ and Z₄ are the rough/fine beam gain differences in spherical coverage directions for power classes 1 and 4 respectively

B.2.3 Conditions for NR inter-frequency measurements

This clause defines the following conditions for NR inter-frequency measurements and corresponding procedures performed based on SSBs: SSB_{RP} and SSB \hat{E}_s/lot , applicable for a corresponding operating band.

The conditions are defined in Table B.2.3-1 for FR1 NR cells.

The conditions are defined in Table B.2.3-2 for FR2 NR cells.

Table B.2.3-1: Conditions for inter-frequency measurements in FR1

| Parameter | NR operating band groups ^{Note1} | Minimum SSB _{RP} | | SSB \hat{E} s/lot |
|------------|---|-----------------------------|-----------------------------|---------------------|
| | | dBm / SCS _{SSB} | | dB |
| | | SCS _{SSB} = 15 kHz | SCS _{SSB} = 30 kHz | |
| Conditions | NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A | -125 | -122 | ≥ -4 |
| | NR_FDD_FR1_B | -124.5 | -121.5 | |
| | NR_TDD_FR1_C | -124 | -121 | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | -124.5 | -120.5 | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | -123 | -120 | |
| | NR_FDD_FR1_G | -122 | -119 | |
| | NR_FDD_FR1_H | -121.5 | -118.5 | |

NOTE 1: NR operating band groups are defined in clause 3.5.2.

Table B.2.3-2: Conditions for inter-frequency measurements in FR2

| Parameter | Angle of arrival | NR operating bands | Minimum SSB _{RP} ^{Note 2, Note 3} | | | | SSB \hat{E} s/lot | |
|------------|--------------------------------------|--------------------|---|--------|------------------------------|----------------------|---|------|
| | | | dBm / SCS _{SSB} | | | | dB | |
| | | | SCS _{SSB} = 120 kHz | | SCS _{SSB} = 240 kHz | | | |
| | | | UE power class | | | | UE power class | |
| | | | 1 | 2 | 3 | 4 | 1, 2, 3, 4 | |
| Conditions | Rx Beam Peak | n257 | - | -111.8 | -110.1 | - | (Value for SCS _{SSB} = 120 kHz) +3dB | ≥ -4 |
| | | n258 | 126.3+Y ₁ | -111.8 | -110.1 | 125.8+Y ₄ | | |
| | | n260 | 123.3+Y ₁ | | -107.5 | 123.8+Y ₄ | | |
| | | n261 | 126.3+Y ₁ | -111.8 | -110.1 | 125.8+Y ₄ | | |
| | Spherical coverage ^{Note 1} | n257 | - | -100.8 | -99.2 | - | (Value for SCS _{SSB} = 120 kHz) +3dB | ≥ -4 |
| | | n258 | 118.3+Z ₁ | -100.8 | -99.2 | 116.8+Z ₄ | | |
| | | n260 | 115.3+Z ₁ | | -94.9 | 111.8+Z ₄ | | |
| | | n261 | 118.3+Z ₁ | -100.8 | -99.2 | 116.8+Z ₄ | | |

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.

NOTE 2: Values specified at the Reference point to give minimum SSB \hat{E} s/lot, with no applied noise.

NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by ΣMB_P and Spherical coverage values are increased by ΣMB_S , the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.2.3-2:

- The value of Y for power classes 1 and 4 is FFS, where Y₁ and Y₄ are the rough/fine beam gain differences in Rx beam peak direction for power classes 1 and 4 respectively
- The value of Z for power classes 1 and 4 is FFS, where Z₁, and Z₄ are the rough/fine beam gain differences in spherical coverage directions for power classes 1 and 4 respectively

B.2.4 Conditions for NR L1-RSRP reporting

B.2.4.1 Conditions for SSB based L1-RSRP reporting

This clause defines the following conditions for NR L1-RSRP measurement reporting and corresponding procedures performed based on SSBs: SSB_RP and SSB \hat{E}_s/lot , applicable for a corresponding operating band.

The conditions are defined in Table B.2.4.1-1 for FR1 NR cells.

The conditions are defined in Table B.2.4.1-2 for FR2 NR cells.

Table B.2.4.1-1: Conditions for SSB based L1-RSRP measurements in FR1

| Parameter | NR operating band groups ^{Note1} | Minimum SSB_RP | | SSB \hat{E}_s/lot |
|------------|---|-----------------------------|-----------------------------|----------------------------|
| | | dBm / SCS _{SSB} | | dB |
| | | SCS _{SSB} = 15 kHz | SCS _{SSB} = 30 kHz | |
| Conditions | NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A | -124 | -121 | ≥ -3 |
| | NR_FDD_FR1_B | -123.5 | -120.5 | |
| | NR_TDD_FR1_C | -123 | -120 | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | -122.5 | -119.5 | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | -122 | -119 | |
| | NR_FDD_FR1_G | -121 | -118 | |
| | NR_FDD_FR1_H | -120.5 | -117.5 | |

NOTE 1: NR operating band groups are defined in clause 3.5.2.

Table B.2.4.1-2: Conditions for SSB based L1-RSRP measurements in FR2

| Parameter | Angle of arrival | NR operating bands | Minimum SSB_RP ^{Note 2, Note 3} | | | | SSB \hat{E}_s/lot | |
|------------|--------------------------------------|--------------------|--|--------|------------------------------|------------|---|------|
| | | | dBm / SCS _{SSB} | | | | dB | |
| | | | SCS _{SSB} = 120 kHz | | SCS _{SSB} = 240 kHz | | | |
| | | | UE power class | | | | | |
| | | 1 | 2 | 3 | 4 | 1, 2, 3, 4 | | |
| Conditions | Rx Beam Peak | n257 | - | -110.8 | -109.1 | - | (Value for SCS _{SSB} = 120 kHz) +3dB | ≥ -3 |
| | | n258 | - | -110.8 | -109.1 | - | | |
| | | n260 | - | | -106.5 | - | | |
| | | n261 | - | -110.8 | -109.1 | - | | |
| | Spherical coverage ^{Note 1} | n257 | - | -99.8 | -98.2 | - | (Value for SCS _{SSB} = 120 kHz) +3dB | |
| | | n258 | - | -99.8 | -98.2 | - | | |
| | | n260 | - | | -93.9 | - | | |
| | | n261 | - | -99.8 | -98.2 | - | | |

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.

NOTE 2: Values specified at the Reference point to give minimum SSB \hat{E}_s/lot , with no applied noise.

NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by ΣMB_P and Spherical coverage values are increased by ΣMB_S , the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.2.4.1-2:

- The value of Y for power classes 1 and 4 is FFS, where Y_1 and Y_4 are the rough/fine beam gain differences in Rx beam peak direction for power classes 1 and 4 respectively

- The value of Z for power classes 1 and 4 is FFS, where Z_1 and Z_4 are the rough/fine beam gain differences in spherical coverage directions for power classes 1 and 4 respectively

B.2.4.2 Conditions for CSI-RS based L1-RSRP reporting

This clause defines the following conditions for NR L1-RSRP measurement reporting and corresponding procedures performed based on CSI-RS: CSI-RS_{RP} and CSI-RS \hat{E}_s/I_{ot} , applicable for a corresponding operating band.

The conditions are defined in Table B.2.4.2-1 for FR1 NR cells.

The conditions are defined in Table B.2.4.2-2 for FR2 NR cells.

Table B.2.4.2-1: Conditions for CSI-RS based L1-RSRP measurements in FR1

| Parameter | NR operating band groups ^{Note1} | Minimum CSI-RS _{RP} | | | CSI-RS \hat{E}_s/I_{ot} |
|------------|--|--------------------------------|--------------------------------|--------------------------------|---------------------------|
| | | dBm / SCS _{CSI-RS} | | | |
| | | SCS _{CSI-RS} = 15 kHz | SCS _{CSI-RS} = 30 kHz | SCS _{CSI-RS} = 60 kHz | dB |
| Conditions | NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A | -124 | -121 | -118 | ≥ -3 |
| | NR_FDD_FR1_B | -123.5 | -120.5 | -117.5 | |
| | NR_TDD_FR1_C | -123 | -120 | -117 | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | -122.5 | -119.5 | -116.5 | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | -122 | -119 | -116 | |
| | NR_FDD_FR1_G | -121 | -118 | -115 | |
| | NR_FDD_FR1_H | -120.5 | -117.5 | -114.5 | |

NOTE 1: NR operating band groups are defined in clause 3.5.2.

Table B.2.4.2-2: Conditions for CSI-RS based L1-RSRP measurements in FR2

| Parameter | Angle of arrival | NR operating bands | Minimum CSI-RS _{RP} ^{Note 2, Note 3} | | | | CSI-RS \hat{E}_s/I_{ot} | |
|------------|--------------------------------------|--------------------|--|------------|--------|---------------------------------|---|------|
| | | | dBm / SCS _{CSI-RS} | | | | | |
| | | | SCS _{CSI-RS} = 60 kHz | | | SCS _{CSI-RS} = 120 kHz | dB | |
| | | | UE power class | | | UE power class | | |
| 1 | 2 | 3 | 4 | 1, 2, 3, 4 | | | | |
| Conditions | Rx Beam Peak | n257 | - 128.3+Y ₁ | -113.8 | -112.1 | - 127.8+Y ₄ | (Value for SCS _{CSI-RS} = 60 kHz) +3dB | ≥ -3 |
| | | n258 | - 128.3+Y ₁ | -113.8 | -112.1 | - 127.8+Y ₄ | | |
| | | n260 | - 125.3+Y ₁ | | -109.5 | - 125.8+Y ₄ | | |
| | | n261 | - 128.3+Y ₁ | -113.8 | -112.1 | - 127.8+Y ₄ | | |
| | Spherical coverage ^{Note 1} | n257 | - 120.3+Z ₁ | -102.8 | -101.2 | - 118.8+Z ₄ | (Value for SCS _{CSI-RS} = 60 kHz) +3dB | |
| | | n258 | - 120.3+Z ₁ | -102.8 | -101.2 | - 118.8+Z ₄ | | |
| | | n260 | - 117.3+Z ₁ | | -96.9 | - 113.8+Z ₄ | | |
| | | n261 | - 120.3+Z ₁ | -102.8 | -101.2 | - 118.8+Z ₄ | | |

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.

NOTE 2: Values specified at the Reference point to give minimum CSI-RS \hat{E}_s/I_{ot} , with no applied noise.

NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by ΣMB_P and Spherical coverage values are increased by ΣMB_S , the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.2.4.2-2:

- The value of Y for power classes 1 and 4 is FFS, where Y_1 and Y_4 are the rough/fine beam gain differences in Rx beam peak direction for power classes 1 and 4 respectively

- The value of Z for power classes 1 and 4 is FFS, where Z_1 and Z_4 are the rough/fine beam gain differences in spherical coverage directions for power classes 1 and 4 respectively

B.2.5 Conditions for RRC connection release with redirection to NR

This clause defines the following conditions for RRC connection release with redirection to NR: SSB_{RP} and SSB_{Es/lot}, applicable for a corresponding operating band.

The conditions are defined in Table B.2.5-1 for FR1 NR cells.

The conditions are defined in Table B.2.5-2 for FR2 NR cells.

Table B.2.5-1: Conditions for for RRC connection release with redirection to NR in FR1

| Parameter | NR operating band groups ^{Note1} | Minimum SSB _{RP} | | SSB \hat{E} s/lot |
|------------|---|-----------------------------|-----------------------------|---------------------|
| | | dBm / SCS _{SSB} | | |
| | | SCS _{SSB} = 15 kHz | SCS _{SSB} = 30 kHz | dB |
| Conditions | NR_FDD_FR1_A, NR_TDD_FR1_A | -125 | -122 | ≥ -4 |
| | NR_FDD_FR1_B | -124.5 | -121.5 | |
| | NR_TDD_FR1_C | -124 | -121 | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | -124.5 | -120.5 | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | -123 | -120 | |
| | NR_FDD_FR1_G | -122 | -119 | |
| | NR_FDD_FR1_H | -121.5 | -118.5 | |

NOTE 1: NR operating band groups are defined in clause 3.5.2.

Table B.2.5-2: Conditions for RRC connection release with redirection to NR in FR2

| Parameter | Angle of arrival | NR operating bands | Minimum SSB _{RP} ^{Note 2, Note 3} | | | | SSB \hat{E} s/lot | |
|------------|--------------------------------------|--------------------|---|--------|--------|------------------------------|---|------------|
| | | | dBm / SCS _{SSB} | | | | | |
| | | | SCS _{SSB} = 120 kHz | | | SCS _{SSB} = 240 kHz | dB | |
| | | | UE power class | | | UE power class | | |
| | | | 1 | 2 | 3 | 4 | | 1, 2, 3, 4 |
| Conditions | Rx Beam Peak | n257 | - | -111.8 | -110.1 | - | (Value for SCS _{SSB} = 120 kHz) +3dB | ≥ -4 |
| | | n258 | - | -111.8 | -110.1 | - | | |
| | | n260 | - | - | -107.5 | - | | |
| | | n261 | - | -111.8 | -110.1 | - | | |
| | Spherical coverage ^{Note 1} | n257 | - | -100.8 | -99.2 | - | (Value for SCS _{SSB} = 120 kHz) +3dB | |
| | | n258 | - | -100.8 | -99.2 | - | | |
| | | n260 | - | - | -94.9 | - | | |
| | | n261 | -114.3 | -100.8 | -99.2 | - | | |

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.

NOTE 2: Values specified at the Reference point to give minimum SSB \hat{E} s/lot, with no applied noise.

NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by ΣMB_P and Spherical coverage values are increased by ΣMB_S , the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.2.5.2-2:

- The value of Y for power classes 1 and 4 is FFS, where Y_1 and Y_4 are the rough/fine beam gain differences in Rx beam peak direction for power classes 1 and 4 respectively

- The value of Z for power classes 1 and 4 is FFS, where Z_1 and Z_4 are the rough/fine beam gain differences in spherical coverage directions for power classes 1 and 4 respectively

B.2.6 Conditions for UE transmit timing

B.2.6.1 Conditions for SSB based UE transmit timing

This clause defines the following conditions for UE transmit timing adjustment performed based on SSBs: SSB_{RP} and SSB \hat{E}_s/lot and applicable for a corresponding operating band.

The conditions are defined in Table B.2.6.1-1 for FR1 SSB.

Table B.2.6.1-1: Conditions for SSB based UE transmit timing in FR1

| Parameter | NR operating band groups ^{Note1} | Minimum SSB _{RP} | | SSB \hat{E}_s/lot |
|------------|---|----------------------------|----------------------------|----------------------------|
| | | dBm / SCS _{SSB} | | dB |
| | | SCS _{SSB} =15 kHz | SCS _{SSB} =30 kHz | |
| Conditions | NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A | -124 | -121 | ≥ -3 |
| | NR_FDD_FR1_B | -123.5 | -120.5 | |
| | NR_TDD_FR1_C | -123 | -120 | |
| | NR_FDD_FR1_D, NR_TDD_FR1_D | -122.5 | -119.5 | |
| | NR_FDD_FR1_E, NR_TDD_FR1_E | -122 | -119 | |
| | NR_FDD_FR1_G | -121 | -118 | |
| | NR_FDD_FR1_H | -120.5 | -117.5 | |

NOTE 1: NR operating band groups are defined in clause 3.5.2.

The conditions are defined in Table B.2.6.1-2 for FR2 SSB.

Table B.2.6.1-2: Conditions for SSB based UE transmit timing in FR2

| Parameter | Angle of arrival | NR operating bands | Minimum SSB _{RP} ^{Note 2, Note 3} | | | | SSB \hat{E}_s/lot | | |
|------------|--------------------------------------|--------------------|---|--------|--------|------------------------------|----------------------------|---|------|
| | | | dBm / SCS _{SSB} | | | | dB | | |
| | | | SCS _{SSB} = 120 kHz | | | SCS _{SSB} = 240 kHz | | | |
| | | | UE power class | | | UE power class | | | |
| | | | 1 | 2 | 3 | 4 | 1, 2, 3, 4 | | |
| Conditions | Rx Beam Peak | n257 | - | -110.8 | -109.1 | - | - | (Value for SCS _{SSB} = 120 kHz) +3dB | ≥ -3 |
| | | n258 | 125.3+ Y_1 | -110.8 | -109.1 | 124.8+ Y_4 | - | | |
| | | n260 | - | - | -106.5 | 122.8+ Y_4 | - | | |
| | | n261 | 125.3+ Y_1 | -110.8 | -109.1 | 124.8+ Y_4 | - | | |
| | Spherical coverage ^{Note 1} | n257 | - | -99.8 | -98.2 | - | - | (Value for SCS _{SSB} = 120 kHz) +3dB | ≥ -3 |
| | | n258 | 117.3+ Z_1 | -99.8 | -98.2 | 115.8+ Z_4 | - | | |
| | | n260 | - | - | -93.9 | 110.8+ Z_4 | - | | |
| | | n261 | 117.3+ Z_1 | -99.8 | -98.2 | 115.8+ Z_4 | - | | |

| |
|--|
| <p>NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.</p> <p>NOTE 2: Values specified at the Reference point to give minimum SSB \hat{E}_s/I_{ot}, with no applied noise.</p> <p>NOET 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by ΣMB_P and Spherical coverage values are increased by ΣMB_S, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].</p> |
|--|

Editor's notes for Table B.2.6.1-2:

- The value of Y for power classes 1 and 4 is FFS, where Y_1 and Y_4 are the rough/fine beam gain differences in Rx beam peak direction for power classes 1 and 4 respectively
- The value of Z for power classes 1 and 4 is FFS, where Z_1 and Z_4 are the rough/fine beam gain differences in spherical coverage directions for power classes 1 and 4 respectively

B.2.6.2 Void

B.3 RRM Requirements Exceptions

B.3.1 Introduction

Annex B.3 covers exceptions for side conditions based on receiver sensitivity for CA, DC, and SUL.

B.3.2 Receiver sensitivity relaxation for CA

B.3.2.1 Receiver sensitivity relaxation for UE supporting CA in FR1

For a UE supporting inter-band carrier aggregation configuration with uplink in NR band, if there is a relaxation of receiver sensitivity $\Delta R_{IB,c} > 0$ dB as defined in clause 7.3A.3 of TS 38.101-1 [18], the relevant side conditions specifying received power levels (SSB_{RP} and I_o) shall be increased by the amount $\Delta = \Delta R_{IB,c}$ defined for the corresponding downlink NR bands.

For a UE supporting CA configuration in FR1, the requirement in this clause applies for both SC and CA operation.

B.3.2.2 Receiver sensitivity relaxation for UE configured with CA in FR1

B.3.2.2.1 Inter-band carrier aggregation

For a UE configured with inter-band carrier aggregation with active uplink in NR band, if there is a relaxation of receiver sensitivity $\Delta R_{IB,c} > 0$ dB as defined in clause 7.3A.3 of TS 38.101-1 [18], the relevant side conditions specifying received power levels (SSB_{RP} and I_o) shall be increased by the amount $\Delta = \Delta R_{IB,c}$ defined for the corresponding downlink NR bands.

If the relaxation Δ specified in this clause applies, then the relaxation specified in clause B.3.2.1 should not be applied.

B.3.2.2.2 Reference sensitivity exceptions due to UL harmonic interference for CA

In this clause, requirements exceptions are described for the UE configured with a band in FR1 when it is impacted by UL harmonic interference from another band in FR1 of the same CA configuration.

A relevant side condition (SSB_{RP} and I_o) in a requirement shall be increased by the amount $\Delta = L_2 - L_1$, where L_1 is the reference sensitivity level specified in clause 7.3.2 of TS 38.101-1 [18], and L_2 is the reference sensitivity level based on the requirements in clause 7.3A.4 of TS 38.101-1 [18], when the following conditions are fulfilled,

- corresponding downlink component carriers on different NR bands are configured with CA and active,
- the uplink is configured in the NR low operating band and is active,
- the uplink configuration is as specified in clause 7.3A.4 of TS 38.101-1 [18], and
- the exception requirements specified in clause 7.3A.4 of TS 38.101-1 [18] apply.

If the relaxation Δ specified in this clause applies, then the relaxation specified in clause B.3.2.1 should not be applied.

B.3.2.2.3 Reference sensitivity exceptions due to intermodulation interference due to 2UL CA

In this clause, requirements exceptions are described for the UE with an inter-band carrier aggregation with uplink assigned to two NR bands.

A relevant side condition (SSB_RP and I_o) in a requirement shall be increased by the amount $\Delta=L_2-L_1$, where L_1 is the reference sensitivity level specified in clause 7.3.2 of TS 38.101-1 [18], and L_2 is the reference sensitivity level based on the requirements in clause 7.3A.5 of TS 38.101-1 [18], when the following conditions are fulfilled,

- corresponding downlink component carriers on different bands are configured with CA and active,
- uplinks are assigned to two NR bands,
- the exception requirements specified in clause 7.3A.5 of TS 38.101-1 [18] apply.

If the relaxation Δ specified in this clause applies, then the relaxation specified in clause B.3.2.1 should not be applied.

B.3.2.3 Receiver sensitivity relaxation for UE supporting CA in FR2

B.3.2.4 Receiver sensitivity relaxation for UE configured with CA in FR2

B.3.2.4.1 Intra-band contiguous carrier aggregation

For a UE configured with intra-band contiguous carrier aggregation in NR band in FR2, if there is a relaxation of receiver sensitivity $\Delta R_{IB} > 0$ dB as defined in clause 7.3A.2.1 of TS 38.101-2 [19] depending on the aggregated channel bandwidth, the relevant side conditions specifying received power levels (SSB_RP and I_o) shall be increased by the amount $\Delta = \Delta R_{IB}$ defined for the corresponding downlink NR bands.

B.3.2.4.2 Intra-band non-contiguous carrier aggregation

For a UE configured with intra-band non-contiguous carrier aggregation in NR band in FR2, if there is a relaxation of receiver sensitivity $\Delta R_{IB} > 0$ dB as defined in clause 7.3A.2.1 of TS 38.101-2 [19] depending on the aggregated channel bandwidth, the relevant side conditions specifying received power levels (SSB_RP and I_o) shall be increased by the amount $\Delta = \Delta R_{IB}$ defined for the corresponding downlink NR bands.

B.3.3 Receiver sensitivity relaxation for DC

B.3.3.1 Receiver sensitivity relaxation for EN-DC

Editor's note: TBD

B.3.3.2 Receiver sensitivity relaxation for NE-DC

Editor's note: TBD

B.3.4 Receiver sensitivity relaxation for SUL

B.3.4.1 Receiver sensitivity relaxation for UE supporting SUL in FR1

For a UE supporting a SUL configuration in FR1, if there is a relaxation of receiver sensitivity $\Delta R_{IB,c} > 0$ dB as defined in clause 7.3C.3 of TS 38.101-1 [18], the relevant side conditions specifying received power levels (SSB_RP and I_o) shall be increased by the amount $\Delta = \Delta R_{IB,c}$ defined for the corresponding downlink NR bands.

For a UE supporting a SUL configuration in FR1, the requirement in this clause applies for both SC and SUL operation.

B.3.4.2 Receiver sensitivity relaxation for UE configured with SUL in FR1

B.3.4.2.1 Reference sensitivity exceptions due to UL harmonic interference for SUL

In this clause, requirements exceptions are described for the UE with a band in FR1 when it is impacted by UL harmonic interference from another band in FR1 of the same SUL configuration.

A relevant side condition (SSB_{RP} and I_o) in a requirement shall be increased by the amount $\Delta=L2-L1$, where L1 is the reference sensitivity level specified in clause 7.3.2 of TS 38.101-1 [18], and L2 is the reference sensitivity level based on the requirements in clause 7.3C.2 of TS 38.101-1 [18], when the following conditions are fulfilled,

- a downlink component carrier is configured in NR band and is active,
- the uplink is configured in the NR low operating band and is active,
- the uplink configuration is as specified in clause 7.3C.2 of TS 38.101-1 [18], and
- the exception requirements specified in clause 7.3C.2 of TS 38.101-1 [18] apply.

If the relaxation Δ specified in this clause applies, then the relaxation specified in clause B.3.4.1 should not be applied.

Annex C (informative): Change history

| Change history | | | | | | | |
|----------------|---------------|------------|------|-----|-----|--|-------------|
| Date | Meeting | TDoc | CR | Rev | Cat | Subject/Comment | New version |
| 2017-05 | RAN4#83 | R4-1706324 | | | | Specification skeleton | 0.0.1 |
| 2017-09 | | | | | | Email approved | 0.1.0 |
| 2017-09 | RAN4-NR AH #3 | R4-1709413 | | | | Capture TPs approved in the meeting | 0.2.0 |
| 2017-10 | RAN4#84 -Bis | R4-1711985 | | | | Capture TPs approved in the meeting | 0.3.0 |
| 2017-12 | RAN4#85 | R4-1714546 | | | | Capture TPs approved in RAN4#85 | 0.4.0 |
| 2017-12 | RAN#78 | RP-172407 | | | | v1.0.0 submitted for plenary approval | 1.0.0 |
| 2017-12 | RAN#78 | | | | | Approved by plenary – Rel-15 spec under change control | 15.0.0 |
| 2018-03 | RAN#79 | RP-180264 | 0032 | | B | CR to TS38.133 | 15.1.0 |
| 2018-06 | RAN#80 | RP-181075 | 0037 | | B | CR to TS 38.133: Implementation of endorsed draft CRs from RAN4 #86bis and RAN4 #87 | 15.2.0 |
| 2018-09 | RAN#81 | RP-181896 | 0043 | | B | CR to TS 38.133: Implementation of endorsed draft CRs from RAN4-AH-1807 and RAN4 #88 | 15.3.0 |
| 2018-12 | RAN#82 | RP-182763 | 0057 | 3 | B | CR to TS 38.133: Implementation of endorsed draft CRs from RAN4-88bis and RAN4-89 | 15.4.0 |
| 2019-03 | RAN#83 | RP-190569 | 0064 | 1 | B | CR to TS 38.133: Implementation of endorsed draft CRs from RAN4#90 | 15.5.0 |
| 2019-06 | RAN#84 | RP-191240 | 0072 | 1 | F | CR to TS 38.133: Implementation of endorsed draft CRs from RAN4#90bis and RAN4#91 | 15.6.0 |
| 2019-09 | RAN#85 | RP-192022 | 0084 | | F | CR to TS 38.133: Implementation of endorsed draft CRs from RAN4#92 (Rel-15) | 15.7.0 |
| 2019-12 | RAN#86 | RP-193039 | 0089 | | F | Correction to the starting point of the DRX cycle length interval | 15.8.0 |
| 2019-12 | RAN#86 | RP-193042 | 0090 | | F | CR to 38.133 R15 Add the missing units to DRX cycle values | 15.8.0 |
| 2019-12 | RAN#86 | RP-192997 | 0092 | 1 | F | Specification of UE antenna gain range | 15.8.0 |
| 2019-12 | RAN#86 | RP-192992 | 0094 | | F | Add RRM Test case setup for 1 AoA in Rx beam peak and 1 in non Rx beam peak | 15.8.0 |
| 2019-12 | RAN#86 | RP-192997 | 0096 | | F | Update of Parameters, Test case A.7.7.1.1 FR2 Intra-frequency SS-RSRP accuracy | 15.8.0 |
| 2019-12 | RAN#86 | RP-192997 | 0098 | | F | Update of Parameters, Test case A.5.7.1.1 FR2 Intra-frequency SS-RSRP accuracy | 15.8.0 |
| 2019-12 | RAN#86 | RP-192997 | 0100 | | F | Update of Parameters, Test case A.7.7.1.2 FR2 Inter-frequency SS-RSRP accuracy | 15.8.0 |
| 2019-12 | RAN#86 | RP-192997 | 0102 | | F | Update of Parameters, Test case A.5.7.1.2 FR2 Inter-frequency SS-RSRP accuracy | 15.8.0 |
| 2019-12 | RAN#86 | RP-192992 | 0104 | | F | Correction to Random access test case in FR1 for PSCell in EN-DC | 15.8.0 |
| 2019-12 | RAN#86 | RP-193040 | 0106 | | F | CR on handover 38.133 | 15.8.0 |
| 2019-12 | RAN#86 | RP-192994 | 0108 | | F | CR on the BWP switch test cases EN-DC FR1 (clause A.4.5.6) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192994 | 0109 | | F | CR on the BWP switch test cases EN-DC FR2 (clause A.5.5.6) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192994 | 0110 | | F | CR on the BWP switch test cases SA FR1 (clause A.6.5.6) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192994 | 0111 | | F | CR on the BWP switch test cases SA FR2 (clause A.7.5.6) | 15.8.0 |
| 2019-12 | RAN#86 | RP-193042 | 0116 | | F | CR to TS38.133 on correction for BWP switching with SCS changing (Clause 8.2.1.2.7, 8.2.2.2.5 and 8.6.2) | 15.8.0 |
| 2019-12 | RAN#86 | RP-193040 | 0120 | | F | CR on handover RRM requirement (clause 6.1.1.5) (R15) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192994 | 0122 | | F | CR on test cases for EN-DC FR2 inter-frequency measurement (clause A.5.6.2) (R15) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192994 | 0126 | | F | CR on test cases for Redirection from NR in FR2 to NR in FR2 (clause A.7.3.2.3) (R15) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192994 | 0128 | | F | CR on test cases for FR2 handover (clause A.7.3.1) (R15) | 15.8.0 |
| 2019-12 | RAN#86 | RP-193042 | 0130 | | F | CR to 38.133 on TCI state switching (Clause 8.10) (R15) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192994 | 0136 | | F | CR on TC with monitoring PDCCH not in first 3 OFDM symbols R15 | 15.8.0 |
| 2019-12 | RAN#86 | RP-193042 | 0144 | | F | Editorial correction for SCell activation and deactivation delay | 15.8.0 |
| 2019-12 | RAN#86 | RP-193040 | 0147 | | F | CR on inter-RAT measurement in TS38.133 (clause 9.4.2, 9.4.3) | 15.8.0 |
| 2019-12 | RAN#86 | RP-193041 | 0155 | | F | CR on NR MTTD and MRTD definition for R15 | 15.8.0 |
| 2019-12 | RAN#86 | RP-193039 | 0158 | | F | CR for SCell activation delay in FR2 | 15.8.0 |
| 2019-12 | RAN#86 | RP-193040 | 0160 | | F | CR for scheduling restriction due to L1-RSRP measurement | 15.8.0 |
| 2019-12 | RAN#86 | RP-192993 | 0166 | 1 | F | CR on SSB setting for new gap and SMTC setting (Clause A.3.10) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192995 | 0168 | | F | CR on TS38.133 for EN-DC SS-SINR tests with PSCell in FR1 (Clause A.4.7.3) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192995 | 0170 | | F | CR on TS38.133 for SA SS-SINR tests with PCell in FR1 (Clause A.6.7.3) | 15.8.0 |

| | | | | | | | |
|---------|--------|-----------|------|---|---|--|--------|
| 2019-12 | RAN#86 | RP-192993 | 0184 | | F | CR on cell-reselection test cases for NR SA FR2 R15 | 15.8.0 |
| 2019-12 | RAN#86 | RP-192995 | 0186 | | F | endorsed CR on intra-frequency measurement and reporting for EN-DC FR2 R15 | 15.8.0 |
| 2019-12 | RAN#86 | RP-192996 | 0188 | | F | endorsed CR on intra-frequency measurement and reporting for NR SA FR2 R15 | 15.8.0 |
| 2019-12 | RAN#86 | RP-192996 | 0190 | | F | endorsed CR on RLM scheduling restrictions for EN-DC FR2 R15 | 15.8.0 |
| 2019-12 | RAN#86 | RP-192996 | 0192 | | F | endorsed CR on RLM scheduling restrictions for NR SA FR2 R15 | 15.8.0 |
| 2019-12 | RAN#86 | RP-192992 | 0200 | 1 | F | Correction to PRACH configuration index in test cases | 15.8.0 |
| 2019-12 | RAN#86 | RP-193039 | 0208 | | F | Correction on the TCI state switching (clause 8.10) | 15.8.0 |
| 2019-12 | RAN#86 | RP-193039 | 0214 | 1 | F | CR for 38133 editorial for clause 8.1,8.8,8.9,8.10,8.11 in Rel-15 | 15.8.0 |
| 2019-12 | RAN#86 | RP-193039 | 0215 | 1 | F | CR for 38133 editorial for clause 8.5 in Rel-15 | 15.8.0 |
| 2019-12 | RAN#86 | RP-193039 | 0216 | 1 | F | CR for 38133 editorial for clause 9.3 in Rel-15 | 15.8.0 |
| 2019-12 | RAN#86 | RP-193040 | 0217 | 1 | F | CR on 38133 for removal the duplicated reference in clause 2 | 15.8.0 |
| 2019-12 | RAN#86 | RP-193040 | 0218 | 1 | F | CR on 38133 for clause 11 in Rel-15 | 15.8.0 |
| 2019-12 | RAN#86 | RP-192994 | 0224 | 2 | F | CR on TC of UE transmit timing (A.4.4.1.1, A.5.4.1.1, A.6.4.1.1, A.7.4.1.1) Rel-15 | 15.8.0 |
| 2019-12 | RAN#86 | RP-193042 | 0229 | 1 | F | Update on requirements related to inter-band EN-DC and NE-DC synchronous requirements | 15.8.0 |
| 2019-12 | RAN#86 | RP-192995 | 0232 | 1 | F | Editorial corrections to measurement accuracy tests | 15.8.0 |
| 2019-12 | RAN#86 | RP-192992 | 0234 | | F | Corrections to SS-RSRQ and SS-SINR OTA tests with SA | 15.8.0 |
| 2019-12 | RAN#86 | RP-192992 | 0236 | | F | Corrections to SS-RSRQ and SS-SINR OTA tests with EN-DC | 15.8.0 |
| 2019-12 | RAN#86 | RP-193042 | 0238 | 1 | F | Editorial corrections to clause 9.2 | 15.8.0 |
| 2019-12 | RAN#86 | RP-192992 | 0241 | | F | Corrections to band applicability of measurement accuracy tests | 15.8.0 |
| 2019-12 | RAN#86 | RP-192996 | 0243 | 1 | F | Introduction of bandwidth limited OCNG for OTA testing | 15.8.0 |
| 2019-12 | RAN#86 | RP-192992 | 0247 | 1 | F | Corrections to test cases for SA FR2 inter-frequency measurement (clause A.7.6.2) | 15.8.0 |
| 2019-12 | RAN#86 | RP-193041 | 0249 | | F | CR to 38.133 NR reporting criteria | 15.8.0 |
| 2019-12 | RAN#86 | RP-192993 | 0263 | 1 | F | CR on correcting CSI-RS based BFD and link recovery tests for EN-DC in FR1 | 15.8.0 |
| 2019-12 | RAN#86 | RP-192993 | 0265 | 1 | F | CR on correcting CSI-RS based BFD and link recovery tests for SA in FR1 | 15.8.0 |
| 2019-12 | RAN#86 | RP-192993 | 0267 | 1 | F | CR on correcting CSI-RS based BFD and link recovery tests for EN-DC in FR2 | 15.8.0 |
| 2019-12 | RAN#86 | RP-192993 | 0269 | 1 | F | CR on correcting CSI-RS based BFD and link recovery tests for SA in FR2 | 15.8.0 |
| 2019-12 | RAN#86 | RP-193040 | 0275 | 1 | F | CR on delay uncertainty of RRC Release with redirection requirements in TS 38.133 | 15.8.0 |
| 2019-12 | RAN#86 | RP-193040 | 0277 | 1 | F | CR on known condition of PSCell addition requirement in NE-DC | 15.8.0 |
| 2019-12 | RAN#86 | RP-193041 | 0279 | 1 | F | CR on known condition of PSCell addition requirement in NR DC | 15.8.0 |
| 2019-12 | RAN#86 | RP-193041 | 0281 | 1 | F | CR on RRC Re-establishment requirements in TS 38.133 | 15.8.0 |
| 2019-12 | RAN#86 | RP-193041 | 0283 | 2 | F | CR on scope of interruption requirements of EN-DC in TS 38.133 | 15.8.0 |
| 2019-12 | RAN#86 | RP-193041 | 0285 | 1 | F | CR on scope of MTTD requirements in TS 38.133 | 15.8.0 |
| 2019-12 | RAN#86 | RP-192994 | 0287 | 1 | F | CR on SSB-based RLM test case for EN-DC FR1 | 15.8.0 |
| 2019-12 | RAN#86 | RP-192994 | 0289 | 1 | F | CR on SSB-based RLM test case for NR SA FR1 | 15.8.0 |
| 2019-12 | RAN#86 | RP-193042 | 0291 | 1 | F | Editorial CR on clause 8.2 | 15.8.0 |
| 2019-12 | RAN#86 | RP-193041 | 0295 | 1 | F | CR on NR inter-frequency identification | 15.8.0 |
| 2019-12 | RAN#86 | RP-193041 | 0297 | 1 | F | CR on NR intra-frequency measurements | 15.8.0 |
| 2019-12 | RAN#86 | RP-193039 | 0311 | 1 | F | Correction on CSSF within measurement gap (clause 9.1.5.2) | 15.8.0 |
| 2019-12 | RAN#86 | RP-193041 | 0313 | | F | CR on RLM scheduling restriction (clause 8.1.7) | 15.8.0 |
| 2019-12 | RAN#86 | RP-193041 | 0315 | 1 | F | CR on SCell activation requirements (clause 8.3.2) | 15.8.0 |
| 2019-12 | RAN#86 | RP-193042 | 0317 | | F | CR to add QCL definition (clause 3.6) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192993 | 0319 | | F | CR on power offset in TRS RMC (A.3.17) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192995 | 0321 | | F | CR to introduce new PDCCH RMC (A.3.1.3.2) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192997 | 0323 | | F | Maintenance CR for measurement accuracy (clause 10.1) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192996 | 0325 | | F | FR1 CSI-RS RLM test OOS/IS non-DRX for EN-DC (clause A.4.5.1) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192996 | 0327 | 1 | F | FR2 CSI-RS RLM test OOS/IS non-DRX for EN-DC (clause A.4.5.1) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192996 | 0329 | | F | FR1 CSI-RS RLM test OOS/IS non-DRX for SA (clause A.6.5.1) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192996 | 0331 | 1 | F | FR2 CSI-RS RLM test OOS/IS non-DRX for SA (clause A.6.5.1) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192997 | 0333 | 1 | F | L1-RSRP delay test FR1 EN-DC (clause A.4.6.3) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192997 | 0335 | | F | L1-RSRP delay test FR2 EN-DC (clause A.5.6.3) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192997 | 0337 | 1 | F | L1-RSRP delay test FR1 SA (clause A.6.6.4) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192997 | 0339 | | F | L1-RSRP delay test FR2 SA (clause A.7.6.3) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192996 | 0343 | | F | L1-RSRP accuracy test FR2 EN-DC (clause A.5.7.4) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192996 | 0345 | | F | L1-RSRP accuracy test FR2 SA (clause A.7.7.4) | 15.8.0 |
| 2019-12 | RAN#86 | RP-193039 | 0357 | | F | CR 38.133 (8.3.2) Amendment of requirements depending on T_SMTc_Max | 15.8.0 |
| 2019-12 | RAN#86 | RP-193039 | 0359 | | F | CR 38.133 (8.3.3) Correction of SCell deactivation delay | 15.8.0 |
| 2019-12 | RAN#86 | RP-192992 | 0361 | | F | CR 38.133 (A.7.5.7) TCs for PSCell addition and release delay | 15.8.0 |
| 2019-12 | RAN#86 | RP-192995 | 0365 | | F | CR to TS 38.133: New common clause with OTA related definitions for FR2 testing (Rel-15) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192995 | 0367 | | F | CR to TS 38.133: Configuration of NR FR1 cell in NR FR1-FR2 tests (Rel-15) | 15.8.0 |

| | | | | | | | |
|---------|--------|-----------|------|---|---|---|--------|
| 2019-12 | RAN#86 | RP-192995 | 0369 | | F | CR to TS 38.133: Clarificatins to Antenna Configurations for FR2 (Rel-15) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192995 | 0371 | | F | CR to TS 38.133: Corrections to CORESET RMCs (Rel-15) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192995 | 0373 | | F | CR to TS 38.133: Corrections to FR2 test configurations (Rel-15) | 15.8.0 |
| 2019-12 | RAN#86 | RP-193042 | 0375 | 1 | F | Editorial updates (clause 9.4) | 15.8.0 |
| 2019-12 | RAN#86 | RP-193039 | 0377 | 1 | F | Correction in interruption requirements (clause 8.2) | 15.8.0 |
| 2019-12 | RAN#86 | RP-193042 | 0379 | 1 | F | Editorial updates (Annex B) | 15.8.0 |
| 2019-12 | RAN#86 | RP-193040 | 0381 | | F | CR on 38133 for MRTD and MTTD in intra-band EN-DC | 15.8.0 |
| 2019-12 | RAN#86 | RP-192992 | 0384 | 1 | F | CR for MAC-CE based TCI State switch for ENDC (Clause A.5.5.8) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192993 | 0385 | 1 | B | CR for MAC-CE based TCI State switch for NR SA (Clause A.7.5.7) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192993 | 0386 | 1 | B | CR for RRC based TCI State switch for NR SA (Clause A.7.5.7) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192993 | 0387 | 1 | F | CR for RRC based TCI State switch for EN-DC (Clause A.5.5.8) | 15.8.0 |
| 2019-12 | RAN#86 | RP-192992 | 0388 | 1 | F | CR for FR1 handover test cases (Clause A.6.3.1.1, A.6.3.1.2, A.6.3.1.3) | 15.8.0 |
| 2019-12 | RAN#86 | RP-193041 | 0389 | 1 | F | CR on MTTD for intra-band EN-DC | 15.8.0 |
| 2019-12 | RAN#86 | RP-193040 | 0397 | | F | CR on corrections on NR intra frequency measurement reporting requirements (Clause 9.2.4) | 15.8.0 |
| 2020-03 | RAN#87 | RP-200400 | 0404 | 1 | F | [CR] handover requirements 38.133 R15 | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0411 | 1 | F | [CR] SCell activation delay 38.133 R15 | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0416 | | F | Corrections to RRM Test case A.7.1.1.2 | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0418 | | F | Correction to Active UL BWP for SA intra-frequency event triggered reporting with per-UE gaps | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0420 | | F | Correction to FR1-E-UTRA Inter-RAT cell re-selection test cases | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0422 | | F | Removal of Time offset between PCell and PSCell in SA RRM Test cases | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0424 | | F | Correction to SRS periodicity and Offset for UL transit timing with DRx config | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0426 | | F | Update of Test Requirements, FR2 Intra-frequency SS-RSRP accuracy Test cases | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0428 | | F | Update of Test requirements, FR2 Inter-frequency SS-RSRP accuracy Test cases | 15.9.0 |
| 2020-03 | RAN#87 | RP-200484 | 0438 | 2 | F | CR on test cases for SA FR2 inter-frequency measurement R15 (section A.7.6.2) | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0444 | 1 | F | Editorial corrections for 38.133 Perf Part R15 | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0446 | | F | Editorial corrections for 38.133 Core Part R15 | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0453 | | F | Editorial correction for active TCI state switching delay | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0461 | 1 | F | Corrections for BWP switch delay R15 | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0463 | | F | CR for reference correction on L1-RSRP measurement period (section 9.5.3) | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0465 | | F | CR for measurement restriction in FR2 across CCs (section 8.1.2.3, 8.1.3.3, 8.5.2.3, 8.5.3.3, 8.5.5.3, 8.5.6.3, 9.5.5.1, 9.5.5.2) | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0467 | | F | CR for SSB based candidate beam detection (section 8.5.5.2) | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0487 | | F | CR to TS 38.133: Corrections to FR1-FR2 event triggered test cases Annex A.5 (Rel-15) | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0489 | | F | CR to TS 38.133: Corrections to FR1-FR2 event triggered test cases Annex A.7 (Rel-15) | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0491 | | F | CR to TS 38.133: Clarifications to AoA setup and AoA cell assignment Annex A.5 (Rel-15) | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0493 | | F | CR to TS 38.133: Clarifications to AoA setup Annex A.8 (Rel-15) | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0495 | | F | CR to TS 38.133: Addition of TC A.4.7.2.2 (Rel-15) | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0499 | | F | Editorial correction of EN-DC FR1 L1-RSRP measurement for beam reporting | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0501 | | F | Editorial correction of NR SA FR1 L1-RSRP measurement for beam reporting | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0508 | | F | CR on removing one-shot timing adjustment requirements | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0515 | 1 | F | Correction to BWP switching delay | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0517 | 1 | F | Correction to inter-RAT measurement on LTE serving carrier | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0519 | 1 | F | Correction to configurations for TRS | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0521 | | F | Correction to FR1 SA inter-RAT measurement TCs | 15.9.0 |
| | | | | | | NOTE The CR is not implemented because the changes in this CR were already implemented in the latest version of the specification. | |
| 2020-03 | RAN#87 | RP-200400 | 0523 | | F | Correction to interruption TCs | 15.9.0 |
| | | | | | | NOTE The CR is not implemented because some parts of changes in the CR were already implemented in the latest version of the specification. | |
| 2020-03 | RAN#87 | RP-200400 | 0527 | | F | Correction to RF channels configuration | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0529 | | F | Correction to RRC release with redirection TCs | 15.9.0 |

| | | | | | | | |
|---------|--------|-----------|------|---|---|---|---------|
| 2020-03 | RAN#87 | RP-200400 | 0531 | | F | Correction to UL reconfiguration delay TCs | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0537 | | F | CR on SSB RLM test cases EN-DC R15 | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0539 | | F | CR on SSB RLM test cases SA R15 | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0541 | | F | CR on cell reselection test cases for FR2 SA R15 | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0543 | | F | OCNG pattern for TDM-ed SSB R15 | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0563 | | F | NR editorial correction | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0579 | 1 | F | CR 38.133 (8.11) Corrections to PSCell change delay requirements | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0586 | | F | PRACH configurations in FR1 SSB based RLM tests | 15.9.0 |
| 2020-03 | RAN#87 | RP-200400 | 0588 | | F | PRACH configurations in FR1 SSB based BFR tests | 15.9.0 |
| 2020-06 | RAN#88 | RP-200987 | 0594 | 1 | F | [CR] Editorial corrections for 38.133 R15 Core Part | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0597 | 1 | F | [CR] Editorial corrections for 38.133 R15 Perf Part | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0601 | 1 | F | CR to Intra-frequency handover from FR1 to FR1 | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0605 | | F | CR to A.6.1.2.1 Cell reselection to higher priority E-UTRAN | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0607 | | F | Correction to General test parameters in A.6.6.1.2 | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0619 | 1 | F | CR on CSSF correction for R15 TS38.133 | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0628 | 1 | F | CR on Active TCI State Switching requirements - Rel15 | 15.10.0 |
| 2020-06 | RAN#88 | RP-200988 | 0633 | 2 | F | Rapporteur CR for TS38.133 | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0650 | | F | Add UE Beam assumption for RRM Test cases in A.7.3, A.7.4, A.7.7 | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0652 | | F | Add UE Beam assumption for RRM Test cases in A.5.3, A.5.4, A.5.7 | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0654 | | F | Update of FR2 RLM Test cases with 2 Angles of Arrival | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0656 | | F | Update of Tx Timing Test cases | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0658 | | F | Update of FR2 RLM and BFD-LR Test cases | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0660 | | F | Update of FR2 SS-RSRP Test cases | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0662 | 1 | F | CR on TCI state switch | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0664 | | F | CR on PDSCH RMC | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0679 | | F | Correction of CFRA RSRP threshold | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0695 | 1 | F | CR on SMTC period for beam management requirements | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0697 | | F | CR for CSI-RS based L1-RSRP measurement period | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0699 | | F | CR on RACH test cases with CSI-RS resource R15 | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0703 | | F | CR on TS38.133 for modification of the layer 3 and layer 1 measurement sharing factor when both SSB and RSSI symbol to be measured are considered | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0705 | | F | CR on TS38.133 for modification on number of cells and number of SSB to be measured for FR2 intra-frequency measurement | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0707 | 1 | F | [CR] TCI state switch delay 38.133 R15 | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0714 | | F | Correction of NR SA FR2 inter-freq measurement reporting | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0726 | | F | CR: Correction of L1-RSRP measurement period | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0728 | 1 | F | CR to TS 38.133: Correction to CSI-RS configurations in A.3.14 (Rel-15) | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0730 | | F | CR to TS 38.133: Correction to SMTC configuration in measurement accuracy tests (Rel-15) | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0732 | | F | CR to TS 38.133: Clarifications to AoA setup Annex A.5 (Rel-15) | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0734 | | F | CR to TS 38.133: Clarifications to AoA setup Annex A.7 (Rel-15) | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0737 | 1 | F | Applicability of QCL | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0747 | 1 | F | CR on Psharingfactor | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0749 | 1 | F | CR on E-UTRAN Serving Cell Parameters | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0751 | 1 | F | CR on Modified parameters for BFD TCs with 4Rx antenna | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0753 | 1 | F | CR on BFD TCs | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0755 | 1 | F | CR on UL carrier RRC reconfiguration Delay TC | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0757 | 1 | F | CR to FR1 SCell activation delay test cases | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0759 | 1 | F | CR to inter-frequency measurement TCs | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0761 | 1 | F | CR to interruption TCs | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0776 | | F | CR on interruption due to Acitve BWP switch | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0780 | | F | CR on UE transmit timing | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0782 | | F | Editorial CR on TS 38.133 Rel-15 | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0784 | | F | CR on RRC Connection Release with Redirection test cases | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0786 | | F | CR on RRC Re-establishment test cases | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0788 | | F | CR on Timing advance test cases for EN-DC | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0790 | | F | CR on Timing test cases for NR SA | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0798 | | F | Correction on TCI state switching R15 | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0800 | | F | Accuracy of carrier aggregation in NR R15 | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0812 | | F | CR 38.133 (8.10.5) Corrections to RRC-based TCI state change | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0815 | 2 | F | CR 38.133 (8.3.2) Corrections to SCell Activation delay requirements | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0820 | | F | CR on FR2 measurement requirements outside gaps R15 | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0822 | | F | CR on inter-RAT RSTD requirements for NE-DC in 38.133 R15 | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0824 | 1 | F | CR on SCell activation requirements R15 | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0826 | | F | CR on SSB based L1-RSRP measurement R15 | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0828 | | F | CR on L1-RSRP delay tests for FR2 R15 | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0830 | | F | CR to L1-RSRP accuracy TC for FR2 EN-DC R15 | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0832 | | F | CR to L1-RSRP accuracy TC for FR2 SA R15 | 15.10.0 |

| | | | | | | | |
|---------|--------|-----------|------|--|---|-------------------------------|---------|
| 2020-06 | RAN#88 | RP-200987 | 0834 | | F | CR to TCI state switch TC R15 | 15.10.0 |
| 2020-06 | RAN#88 | RP-200987 | 0866 | | F | Clarification on RLM | 15.10.0 |

History

| Document history | | |
|-------------------------|----------------|-------------|
| V15.2.0 | July 2018 | Publication |
| V15.3.0 | October 2018 | Publication |
| V15.4.0 | April 2019 | Publication |
| V15.5.0 | July 2019 | Publication |
| V15.6.0 | July 2019 | Publication |
| V15.7.0 | October 2019 | Publication |
| V15.8.0 | February 2020 | Publication |
| V15.9.0 | April 2020 | Publication |
| V15.10.0 | September 2020 | Publication |