

Draft **EN 301 391** V1.1.1 (1998-11)

European Standard (Telecommunications series)

**Electromagnetic compatibility
and Radio spectrum Matters (ERM);
Data communications using short range devices;
Access protocol, occupation rules and corresponding
technical characteristics for the transmission of data**



Reference

DEN/ERM-RP02-034 (cvo00ico.PDF)

Keywords

access, data, mobile, protocol, radio

ETSI

Postal address

F-06921 Sophia Antipolis Cedex - FRANCE

Office address

650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16
Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Internet

secretariat@etsi.fr
<http://www.etsi.org>

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1998.
All rights reserved.

Contents

Intellectual Property Rights.....	5
Foreword	5
Introduction	5
1 Scope.....	6
2 References.....	6
3 Definitions, symbols and abbreviations	7
3.1 Definitions	7
3.2 Symbols	7
3.3 Abbreviations.....	7
4 General	8
4.1 Applications using this protocol	8
4.2 Conformity to the present document	8
4.2.1 Declaration of conformity	8
4.2.2 Measurements to be performed	8
4.2.3 Interpretation of the measurement results.....	9
5 Technical characteristics of the equipment.....	9
6 Access protocol definition	9
6.1 Duration of the radio channel occupancy for each access.....	9
6.2 Principles	10
6.3 Procedure.....	10
6.4 Carrier sensing	10
6.5 Observation time.....	11
6.6 Message priority delay	11
6.7 Duty Cycle	11
6.8 Anti blocking	11
7 Methods of measurement and limits	12
7.1 Channel access duration.....	12
7.1.1 Definition	12
7.1.2 Method of measurement.....	12
7.1.2.1 Single transmitter only using a channel access	12
7.1.2.2 More than one transmitter using a channel access	12
7.1.3 Limit.....	12
7.2 Reply carrier delay.....	13
7.2.1 Definition	13
7.2.2 Method of measurement.....	13
7.2.3 Limit.....	13
7.3 Anti blocking	13
7.3.1 Definition	13
7.3.2 Method of measurement.....	13
7.3.3 Limit.....	14
7.4 Carrier sense threshold.....	14
7.4.1 Definition	14
7.4.2 Method of measurement.....	14
7.4.3 Limit.....	15
7.5 Carrier sense delay.....	15
7.5.1 Definition	15
7.5.2 Method of measurement.....	15
7.5.3 Limit.....	16
7.6 Observation time.....	16
7.6.1 Definition	16

7.6.2	Method of measurement	16
7.6.3	Limit	17
7.7	Channel accessing carrier attack time	17
7.7.1	Definition	17
7.7.2	Method of measurement	18
7.7.3	Limit	18
8	Examples of channel access timing	19
9	Measurement uncertainty	20
Annex A (normative): Radiated measurement		21
A.1	Test sites and general arrangements for measurements involving the use of radiated fields	21
A.1.1	Anechoic chamber	21
A.1.2	Anechoic chamber with a ground plane	22
A.1.3	OATS	23
A.1.4	Test antenna	24
A.1.5	Substitution antenna	25
A.1.6	Measuring antenna	25
A.2	Guidance on the use of radiation test sites	25
A.2.1	Verification of the test site	25
A.2.2	Preparation of the EUT	25
A.2.3	Power supplies to the EUT	25
A.2.4	Volume control setting for analogue speech tests	26
A.2.5	Range length	26
A.2.6	Site preparation	26
A.3	Coupling of signals	27
A.3.1	General	27
A.3.2	Data Signals	27
A.3.3	Speech and analogue signals	27
A.3.3.1	Acoustic coupler description	27
A.3.3.2	Calibration	28
Bibliography		29
History		30

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available **free of charge** from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM), and is now submitted for the Public Enquiry phase of the ETSI standards Two-step Approval Procedure.

Annex A is normative and provides additional information concerning measurements. In the case of equipment not designed for operation in the band 868 MHz to 870 MHz, similar annexes in the appropriate radio product standard will take when appropriate.

Proposed national transposition dates	
Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	36 months after doa

Introduction

The present document specifies an access protocol intended to be used in equipment employing short range (radio) devices for the cordless transfer of small data packets.

It is intended that the implementation of this protocol is sufficiently simple to suit the low costs necessary for some products.

The present document relies on all equipment on a shared channel using this protocol.

The protocol allows efficient channel sharing in high data traffic situations, and has been devised to provide an equitable share between all users of the channel. The present document only applies to applications that require infrequent bursts of small data packets for the purpose of control and limited data transfer i.e. not continuous unbroken data transmission.

This protocol relies on there being a limited radiated power and therefore a limited range, thus restricting the overlap of local users (cell size) to a level where the protocol can cope by time sharing between them.

Data collision is minimized in this protocol by using carrier sense multiple access (CSMA) which requires that the radio channel is silent before starting any transmission.

Arbitration between competing users is achieved by using a pseudo random length delay period before transmitting. A mechanism for prioritizing messages, based on message length, is also provided as part of the arbitration process.

1 Scope

The present document covers a radio channel access protocol and provides all the parameters that are essential for its use.

The present document has been designed to be used with Short Range Devices sharing a common, single frequency, radio channel and transmitting small (short duration) data packets. Standards EN 300 220, I-ETS 300 330 and I-ETS 300 440 provide technical characteristics for short range device equipment. These products will be co-existing on the same radio spectrum.

The present document specifies the access protocol and the occupation rules for data communications on a radio channel shared by different users. The present document does not specify or impose any restriction on the bit rate, data format or modulation scheme.

This access protocol is not intended for applications requiring continuous (unbroken) data transmission.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

- [1] EN 300 220-1 (V1.2): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Short range devices; Technical characteristics and test methods for radio equipment to be used in the 25 MHz to 1 000 MHz frequency range with power levels ranging up to 500 mW; Part 1: Parameter intended for regulatory purposes".
- [2] EN 300 220-2 (V1.2): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Short range devices; Technical characteristics and test methods for radio equipment to be used in the 25 MHz to 1 000 MHz frequency range with power levels ranging up to 500 mW; Part 2: Supplementary parameters not intended for regulatory purposes".
- [3] I-I-ETS 300 330 (1994): "Radio Equipment and Systems (RES); Short Range Devices (SRDs); Technical characteristics and test methods for radio equipment in the frequency range 9 kHz to 25 MHz and inductive loop systems in the frequency range 9 kHz to 30 MHz".
- [4] I-ETS 300 440 (1995): "Radio Equipment and Systems (RES); Short Range Devices (SRDs); Technical characteristics and test methods for radio equipment to be used in the 1 GHz to 25 GHz frequency range".
- [5] ETS 300 113 (1996): "Radio Equipment and Systems (RES); Land mobile service; Technical characteristics and test conditions for radio equipment intended for the transmission of data (and speech) and having an antenna connector".
- [6] ETS 300 390 (1996): "Radio Equipment and Systems (RES); Land mobile service; Technical characteristics and test conditions for radio equipment intended for the transmission of data (and speech) and using an integral antenna".

- [7] ETS 300 471 (1995): "Radio Equipment and Systems (RES); Land mobile service; Access protocol, occupation rules and corresponding technical characteristics of radio equipment for the transmission of data on shared channels".
- [8] CEPT/ERC Recommendation 70-03 (1997, revised 1998): "Relating to the use of Short Range Devices (SRD)". Including Appendices and Annexes.
- [9] IEC 60489-3: "Methods of measurement for radio equipment used in the mobile services. Part 3: Receivers for A3E or F3E emissions".
- [10] ETR 273 parts 2 to 4: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Improvement of radiated methods of measurement (using test sites) and evaluation of the corresponding measurement uncertainties".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the following definitions apply:

attack time: The time taken between establishing that the channel can be accessed to the actual instant of access.

Observation time: The definition is given in subclause 6.5.

bit: Binary digit.

data packet: The smallest quantity of data sent over the radio channel in one access period. A number of useful bits are always sent together with corresponding redundancy bits in any given packet. An acknowledge reply, if used, is also included in the packet.

message: User data to be transferred in one or more packets in a session.

message length: Time taken to transmit a message; the sum of the carrier on time of all the data packets used and the carrier off (silence) times of all the data packets used.

reply: A transmission by a device in answer to the "initiating transmitter". This reply can be an acknowledge ("ACK") or a negative acknowledge ("NACK") and/or a longer packet of useful / requested information.

reply carrier delay: The time period between end of a transmission and start of an acknowledge / reply.

silence: The condition of no detected carrier energy in the radio channel in question.

transmission (physical): One packet transmitted between carrier on and final carrier off of a particular transmitter.

3.2 Symbols

For the purposes of the present document, the following symbols apply:

dB	decibel
dBm	dB relative to 1 mW
dB μ V	dB relative to 1 μ V
Tx	transmitter (radio)

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ACK	ACKnowledge
ASK	Amplitude Shift Keying

CSMA	Carrier Sense Multiple Access
EUT	Equipment Under Test
f_c	carrier frequency (band centre)
FSK	Frequency Shift Keying
NACK	Negative ACKnowledge
OATS	Open Area Test Site
P_{off}	carrier off power level
$p_{r acc}$	minimum receiver sensitivity needed to check that a channel is free
$P_{r check}$	received carrier power level, generated by a checking transmitter
PSK	Phase Shift Keying
QAM	Quadrature Amplitude Modulation
RF	Radio Frequency
t_f	fixed part of Observation time
t_o	Observation time
t_p	priority part of Observation time
t_r	pseudo random part of Observation time

4 General

4.1 Applications using this protocol

This access protocol applies to a wide variety of applications operating at various data rates in both domestic and industrial fields. To accommodate this situation, four priority levels are included which correspond to different data packet lengths. This, for example, improves the chance of access for a simple control function (requiring a fast response time) in favour of a function transferring a large amount of data (less critical of response time).

The protocol may be used with the following types of communication:

- point-to-point (source to destination);
- point-to-multi-point (source to group);
- multi-point-to-point (polling).

4.2 Conformity to the present document

Conformity to the requirements of the present document is based upon both declarations and measurements.

4.2.1 Declaration of conformity

Those parameters covered by manufacturers declaration are given in clause 6 of the present document.

A signed declaration shall be provided as confirmation that the equipment meets the requirements of this access protocol. This declaration may be submitted by the manufacturer, or his representative, together with the application form for tests.

In the case where the controlling software for the equipment (or modules thereof) has not been designed by the manufacturer of the radio equipment, the responsible party for engineering such software shall also provide a signed declaration of conformity.

4.2.2 Measurements to be performed

- These measurements shall be performed for all parts of the equipment included in the system, designed to use this protocol. Clause 7 of the present document gives the methods of measurements and limits for the above parameters.

The manufacturer shall provide any necessary test points and/or test fixtures, dedicated test equipment (if needed) and/or test modes for the purpose of testing and making measurements.

The following measurements and tests shall be performed, in an accredited test laboratory:

- Channel Access duration;
- Reply carrier delay;
- Anti blocking;
- Carrier sense threshold;
- Carrier sense delay;
- Observation time;
- Channel accessing carrier attack time.

4.2.3 Interpretation of the measurement results

The interpretation of the measurement results recorded in a test report for the measurements described in the present document shall be as follows:

- a) the measured value related to the corresponding limit shall be used to decide whether the equipment under test meets the requirements of the present document or not;
- b) the actual measurement uncertainty of the test laboratory carrying out the measurement, for each particular measurement, shall be included in the test report;
- c) the values of the actual measurement uncertainty shall be, for each measurement, equal to or lower than the figures given in clause 9, absolute measurement uncertainties.

5 Technical characteristics of the equipment

This protocol is intended to be used by short range devices fulfilling the requirements of EN 300 220, (I-)I-ETS 300 330 and (I-)I-ETS 300 440 as applicable. The use of short range devices (SRD) is also covered in CEPT/ERC Recommendation 70-03.

It is recommended that the spread of the minimum reception sensitivity between all manufactured devices in a system be kept as small as possible. This is in the interests of minimizing data clashes between competing systems.

The number of transmission retries (intended to overcome transmission collisions and corruption) should be limited to a maximum of 5.

6 Access protocol definition

All devices fulfilling the present standard shall use this protocol each time they access the RF channel and the RF channel is to be used only by such devices.

6.1 Duration of the radio channel occupancy for each access

The total time during which the channel may be occupied (channel occupation time) shall not exceed **100 ms**. This includes any acknowledge / reply duration from a responding device.

Provided that both the maximum time for channel occupation and the reply carrier delay limits are fulfilled, the channel may be occupied by a sequence of any number of transmissions (involving, possibly, replies from one or more transmitters).

If, therefore, a replying device, or devices are required to return data (e.g. for handshake purposes), then the time taken to do this shall be included in the channel occupation time.

Transfer of large quantities of data shall be achieved by dividing it up into suitably small packets to satisfy the protocol.

The channel occupation time is taken to be the time between the initial transmission reaching 1 % of its mean power and the time when the final transmission falls to 1 % of its mean power.

6.2 Principles

For the purpose of channel access, the equipment determines whether or not the channel is free and has been free for the Observation time t_o by means of carrier sensing in the channel.

The Observation time (see subclause 6.5) consists of a fixed part, a Priority part and a pseudo-random additional part. When the channel appears to have been continuously free by the end of the Observation time, the transmitter may be initiated and shall be powered up within the specified time (the accessing carrier attack time delay, see subclause 7.6).

The Priority part has been included in the Observation time for the purpose of giving priority to shorter messages in order to improve their response time chances.

The total duration of the RF carrier emission (access time) is limited (see subclauses 6.1 and 7.1).

The overall duty cycle limitation is given in subclause 6.7.

6.3 Procedure

In order to gain access to the radio channel the equipment shall determine whether or not the channel is, and has been, free during the Observation time t_o , by means of carrier sensing (see subclause 6.4). If the channel appears to be free throughout the Observation time and there is information to be sent, the transmission shall then be initiated and RF carrier radiation commenced within the specified time (carrier attack time; see subclause 7.6.1 for definition). Once the channel has been seized it may be occupied for up to the maximum time allowed for a single channel occupancy (see subclauses 6.1 and 7.1).

At the end of a transmission, another Observation time may start immediately, unless the duty cycle limit has been reached (subclause 6.7).

If a re-transmission is required (due, for example, to a "collision"), this same process shall be repeated and, once again, the channel shall be detected as being free during the Observation time prior to repeating the attempt to transmit.

To ensure that no other user can access the channel during a half duplex access, a maximum Reply carrier delay t_c has been defined (see subclause 7.2).

6.4 Carrier sensing

Carrier sensing, or more appropriately channel energy sensing, is the detection of whether the RF level in the receive channel exceeds a given threshold or not.

The carrier sense shall be able to detect RF signals with different types of modulation (e.g. FSK, ASK, PSK, QAM etc.).

The channel shall be regarded as in use during the Observation time (see subclause 6.5) if the level of the RF signal on the channel exceeds the threshold given in subclause 7.4.

Carrier sensing shall take place throughout the Observation time either continuously or at regular intervals not exceeding **250 μ s** and the carrier sense delay shall not exceed the limit given in subclause 7.5.

6.5 Observation time

The Observation time t_0 is the sum of the fixed part t_f , the Priority part t_p and the pseudo random part t_r $t_0 = t_f + t_p + t_r$.

The fixed part, t_f of the Observation time shall be not less than **5 ms**.

The Priority part, t_p of the Observation time shall be not less than that given in the table in subclause 6.6 (**0 ms to 8 ms**).

The pseudo random part t_r shall consist of a range of N different values t_i .

The number N of these different values (t_i) shall not be less than **11**

The different values (t_i) shall not be less than **1 ms** of each other.

The mean of all these N values shall not be less than **5 ms**.

The smallest of these different values (t_i) may be **0 ms**.

All of these N different values (t_i) shall be used in N successive transmission transactions.

6.6 Message priority delay

A Priority delay t_p shall be included in each Observation time. The value used for t_p will be according to the message length and is given in table 1.

Table 1: Message priority delay categories

Category	Data Packet length	Priority delay t_p
Very short	not greater than 12 ms	≥ 0 ms
Short	not greater than 25 ms	≥ 2 ms
Normal	not greater than 50 ms	≥ 5 ms
Long	not greater than 100 ms	≥ 8 ms

6.7 Duty Cycle

The duty cycle of devices transmitting messages shall be limited as given for category 3 in duty cycle categories, CEPT/ERC Recommendation 70-03.

Duty cycle limitations are only provided in order to avoid that a device unable to receive correctly may block the channel with an unacceptable Duty cycle.

6.8 Anti blocking

In the case of interference, the channel may appear to be in constant use. In accordance with the protocol defined so far, all the devices should remain in the Observation status and the channel would then be "blocked".

In order to avoid the real blocking of all the devices, a mechanism is provided to allow also for channel access in such conditions.

This mechanism is optional, however, this mechanism requires a minimum wait time before channel access is allowed (see subclause 7.3).

Under all circumstances, the duty cycle limitation given in subclause 6.7 applies.

7 Methods of measurement and limits

A special test mode may be used provided that the normal operating characteristics are not affected.

7.1 Channel access duration

7.1.1 Definition

The channel access duration is the time elapsed between the initial access carrier reaching 1 % of its mean power to the final carrier falling below 1 % of its mean power at the end of the transmission or the end of the reply carrier in the case of a multi transmitter communication.

Devices which are able to initiate a transmission and are transmitting without response to any previous initial transmission from other devices shall to be considered for this measurement (see subclause 7.1.2.1).

A multi transmitter channel access is one which is used by several transmitting devices. It consists of an initiating transmission followed by one or several sequential replying transmissions (see subclause 7.1.2.2).

7.1.2 Method of measurement

Two different measurements are required to be performed.

The maximum channel access duration of a device that is able to initiate a data packet transmission (single transmitter, see subclause 7.1.2.1) shall be measured.

The maximum channel access duration for an initiating transmission followed by all devices capable of replying with their transmissions (see subclause 7.1.2.2) shall also be measured.

7.1.2.1 Single transmitter only using a channel access

The measurement shall be made of the time elapsed between the instant when the carrier reaches 1 % of its mean power level from the wanted carrier off power level P_{off} , and the instant when the carrier falls to 1 % from its mean power down to the carrier off power level P_{off} .

The duty cycle is required to be measured in conformance with EN 300 220-1; I-ETS 300 330 and I-ETS 300 440 as applicable.

7.1.2.2 More than one transmitter using a channel access

The measurement shall be made of the time elapsed between the instant when the carrier of the initiating device reaches 1 % of its mean power from the wanted carrier off power P_{off} level, and the instant when the last replying device falls to 1 % of its mean power down to the wanted carrier off power P_{off} level. All replying carrier delays t_r during the channel access shall be included in the measurement.

The duty cycle has to be measured in conformance with EN 300 220-1; I-ETS 300 330 and I-ETS 300 440 as applicable and is given in CEPT/ERC Recommendation 70-03, annex 1.

7.1.3 Limit

Under all conditions and all phases of the applications supported, the total channel access duration shall be less than or equal to **100 ms**.

The conditions under which the measurements has been performed shall be included in the test report.

7.2 Reply carrier delay

7.2.1 Definition

The reply carrier delay is the time which elapses between the instant a transmission falls below 1 % from its mean power to the instant that the carrier of a replying device reaches 50 % of its mean power.

This measurement is applicable only to multi transmitter, channel access.

7.2.2 Method of measurement

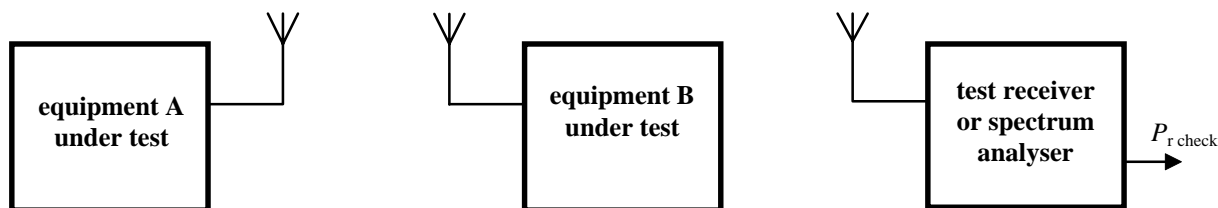


Figure 1: Measurement arrangement for device capable of replying to a communication initiating device

The measurement shall be made of the time elapsed between the instant that the received carrier $P_{r \text{ check}}$ at the test receiver, falls 1 % from its mean power level to the instant in which the carrier from the last replying device reaches 50 % of its mean power.

7.2.3 Limit

The reply carrier delay shall not be greater than **4 ms**.

7.3 Anti blocking

In the case of interference the channel may appear as blocked. The following measurements are performed to check the anti blocking characteristic of a device. The worst case of blocking interference is a continuous carrier transmission, interrupted by short gaps.

7.3.1 Definition

Anti blocking is the ability of a device to access the channel if the channel has been found to be blocked for at least 600 ms.

7.3.2 Method of measurement

The device to be tested and a checking transmitter shall be placed on a test bench and shall be separated by a distance of 3 metres.

A test receiver or spectrum analyser shall be used to monitor signals from the equipment under test and the checking transmitter.

The checking transmitter may be a signal generator capable of generating a CW signal at the centre carrier frequency.

The output signal from the checking transmitter shall be able to be switched on and off.

Initially, the level of the test signal be set to at least -80 dBm and then adjusted such that a signal received from the equipment under test, displayed on the spectrum analyser, is at least 10 dB higher than that from the checking transmitter.

The checking transmitter shall be keyed on and off continuously with an on time of 12 ms and an off time of 4 ms.

The equipment under test shall be triggered to initiate a channel access. Means shall be available to establish when the device has started to seek channel access.

The time between the equipment under test starting a channel access seek and the appearance of the RF output signal from the equipment under test shall be measured.

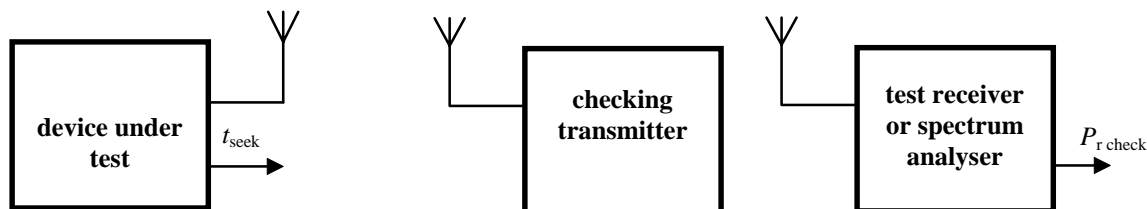


Figure 2: Measurement arrangement for evaluation of the anti blocking characteristic

7.3.3 Limit

A channel access attempt may not begin before **600 ms** has elapsed.

7.4 Carrier sense threshold

7.4.1 Definition

The carrier sense threshold is the minimum level of the input signal which will trigger a change in the status of the carrier sense logic signal.

7.4.2 Method of measurement

The equipment shall be arranged as shown in figure 2 above, with 3 metres between the device under test and the checking transmitter (to be supplied by the manufacturer).

The device under test shall have an appropriate test point available from which a signal exists corresponding / coinciding with the carrier sense logic signal used for the purpose of carrier detection.

The checking transmitter shall have a carrier frequency at the channel centre and have a mean power level equal to that of a transmitter of the system under test (± 3 dB) of that of the system transmitter.

The checking transmitter is required to be on for 12 ms and off for 4 ms in a continuous sequence to form a blocking signal.

The device under test shall be triggered with a request to transmit.

The elapsed time shall be measured between the request to transmit event and the instant that the device under test initiates a transmission, or when the carrier sense logic signal changes state.

The carrier of the checking transmitter is required to be decreased until a change in the logical state of the carrier sense signal is noted. Care should be taken in order to avoid that the device under test does not enter an anti blocking procedure (possible after 600 ms of continuous carrier).

The carrier level which has generated an effect in the carrier sense of the device under test shall be noted and maintained continuously.

The device under test shall then be replaced by a measuring receiver and the field strength recorded.

To allow for threshold hysteresis the measurement shall then be repeated for increasing output from the checking transmitter until the 600 ms inhibition starts to occur.

These measurements shall be repeated with the checking transmitter frequency carrier at band centre and at band centre + N and at band centre - N as illustrated in figure 3, where N = channel spacing/3.

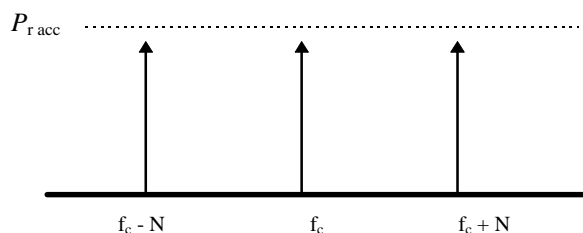


Figure 3: Measurements taken at three carrier frequencies

The carrier sense threshold limit case shall be the highest of the 6 values measured above.

7.4.3 Limit

The carrier sense threshold shall not exceed the level $P_{r\text{acc}}$ as defined in table 2, according to the channel spacing that applies.

Table 2: Carrier sense limit versus channel spacing

Carrier sense Limit	Channel Spacing
24 dB μ V/m	up to 10 kHz
27 dB μ V/m	> 10 kHz to 20 kHz
30 dB μ V/m	> 20 kHz to 40 kHz
33 dB μ V/m	> 40 kHz to 80 kHz
36 dB μ V/m	> 80 kHz to 160 kHz
39 dB μ V/m	above 160 kHz

7.5 Carrier sense delay

7.5.1 Definition

The carrier sense delay is the time which elapses between a carrier reaching 1 % of its mean power and the changing of the state of the carrier sense logic signal.

7.5.2 Method of measurement

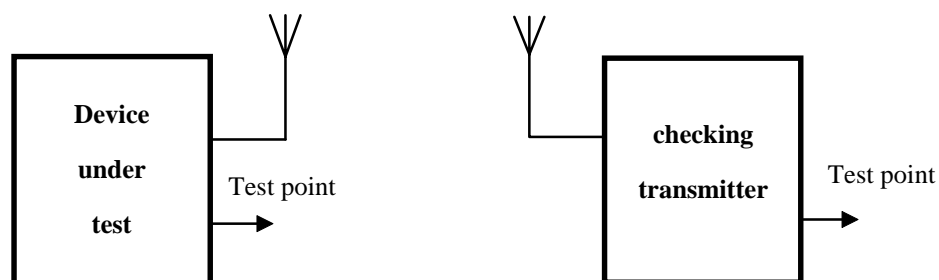


Figure 4: Measurement arrangement for a device's carrier sense delay measurement

The equipment shall be arranged as shown in figure 4 with 3 metres between the device under test and the checking transmitter (to be supplied by the manufacturer).

The device under test shall have an appropriate test point available from which a signal exists corresponding / coinciding with the carrier sense logic signal used for the purpose of carrier detection.

The checking transmitter shall have a carrier frequency at the channel centre and have a mean power level equal to that of a transmitter of the system under test (± 3 dB) of that of the system transmitter. The checking transmitter shall have a test point, or similar means, to time the instant that the switched carrier reaches 1 % of its mean power level.

A measurement is to be made of the time between the moment when the checking transmitter crosses the 1 % point and the changing of the state of the carrier sense signal of the device under test.

The measurement shall be repeated for the carrier on to off transition of the checking transmitter. The rise and decay times of the checking transmitter shall not be significant taking into account the measurement uncertainty sought (see clause 9).

The carrier sense delay is the longest of the two values measured above.

7.5.3 Limit

The carrier sense delay shall not exceed **300 μ s**.

7.6 Observation time

7.6.1 Definition

The Observation time is the time which elapses between the instant that an application makes a request to transmit, to the instant that the carrier reaches 1 % of its mean power.

7.6.2 Method of measurement

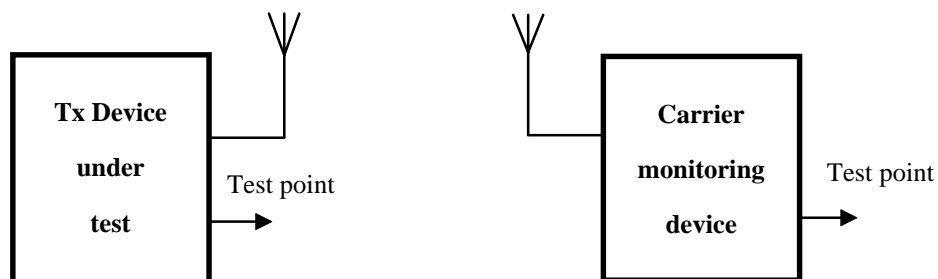


Figure 5: Measurement arrangement for a transmitting device's Observation period before transmission

The equipment shall be arranged as shown in figure 5 with 3 metres between the device under test and the carrier monitoring device (supplied by the manufacturer).

The device under test shall have an appropriate test point from which a pulse is produced, the leading edge of which shall coincide with the request to transmit event.

The carrier monitoring device shall provide a signal at its test point output which corresponds to the carrier envelope from the transmitting device. The carrier monitoring device shall not introduce any signal delay greater than 25 μ s.

A sequence of measurements should be made from consecutive transmissions. The number of these measurements shall be equal to the number of different values used for the pseudo random part (i.e. not less than 11, information supplied by the applicant).

7.6.3 Limit

The applicant is required to declare which message lengths are expected.

The mean value of all the Observation duration measurements made should be as follows:

For message lengths not greater than 12 ms the mean value of all measurements shall not be less than **10 ms**.

For message lengths not greater than 25 ms the mean value of all measurements shall not be less than **12 ms**.

For message lengths not greater than 50 ms the mean value of all measurements shall not be less than **15 ms**.

For message lengths not greater than 100 ms the mean value of all measurements shall not be less than **18 ms**.

If messages of different lengths have been observed, the appropriate weighting may be applied to the limit values given above.

Details shall be included in the test report.

7.7 Channel accessing carrier attack time

7.7.1 Definition

The channel accessing carrier attack time is the time which elapses between the instant of establishing that a transmission can take place and;

the moment when the transmitter output power has reached a level 1 dB below or 1,5 dB above the steady state mean power (P_c) and maintains a mean power level within +1,5 dB / -1 dB from P_c thereafter, as seen on the measuring equipment or in the plot of power as a function of time; or

the instant after which the frequency of the carrier remains within ± 10 kHz (in the case of 100 kHz channels) of its steady state frequency (f_c) as seen on the measuring equipment or the plot of frequency as a function of time;

whichever occurs later.

7.7.2 Method of measurement

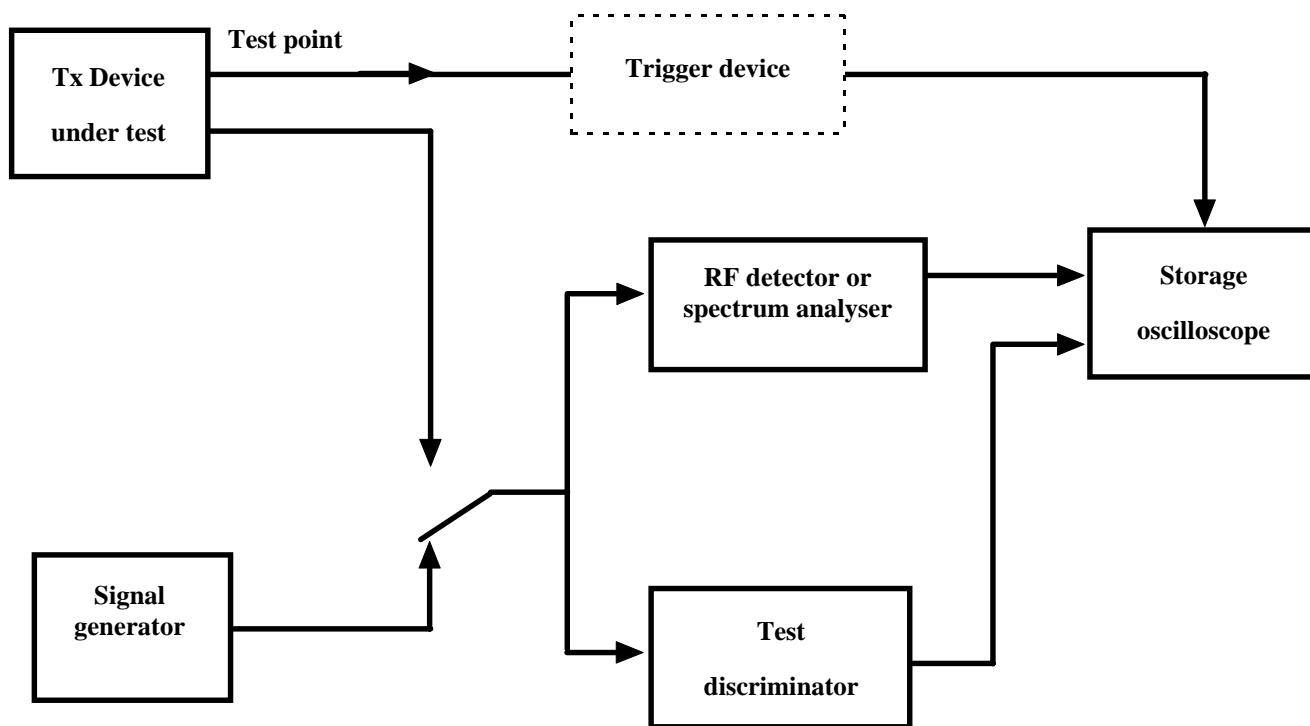


Figure 6: Measurement arrangement for the channel accessing carrier attack delay

Figure 7 shows the test arrangement. Equivalent methods may be used by an accredited test laboratory. If so, it should be documented in the test report.

The measurement procedure shall be as follows:

- a) The transmitter is connected to a RF detector and to a test discriminator via a matched test load. The attenuation of the test load shall be chosen in such a way that the input of the test discriminator is protected against overload and the limiter amplifier of the test discriminator operates correctly in the limiting range as soon as the transmitter carrier power (before attenuation) exceeds 1 mW. A dual trace storage oscilloscope (or a transient recorder) records the amplitude transient from the detector on a logarithmic scale and the frequency transient from the discriminator.

A trigger device may be required to ensure that the start of the sweep of the oscilloscope time base occurs at the instant the decision is made that a transmission can take place. The measuring arrangement is shown in figure 7 above.

A spectrum analyser and a test discriminator / storage oscilloscope can be used.

The traces of the oscilloscope shall be calibrated in power and frequency (y-axes) and in time (x-axis), using the signal generator.

The channel accessing attack time shall be measured by direct reading on the oscilloscope while the transmitter is preferably unmodulated.

See ETS 300 113 subclauses 8.8 to 8.10 for more detail of this test method.

7.7.3 Limit

The channel accessing attack time shall not exceed **300 µs**.

8 Examples of channel access timing

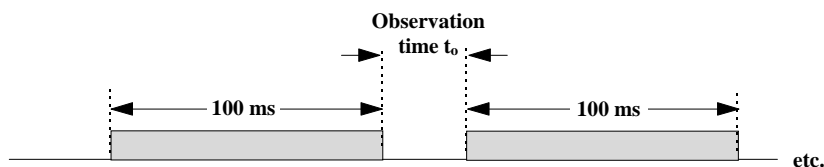


Figure 7: Channel access using half duplex transmission

Figure 1 above shows the RF carriers for transmitter 'X' and transmitter 'Y'. Half duplex communication is illustrated between a sending device 'X' and a corresponding (correctly addressed) receiving device returning an acknowledge / reply. This is followed in turn by a transmission from device 'Y'.

Assuming that device 'Y' is waiting to transmit whilst device 'X' is transmitting, then device 'Y' will detect the carrier gap (during its Observation time), but having again detected the presence of a carrier will continue to wait, as illustrated, until the reply to 'X' has finished, according to the rules of the protocol.

Device 'Y' having eventually detected carrier silence (see subclause 6.4) throughout its full Observation time (see subclause 6.5), will then commence its transmission.

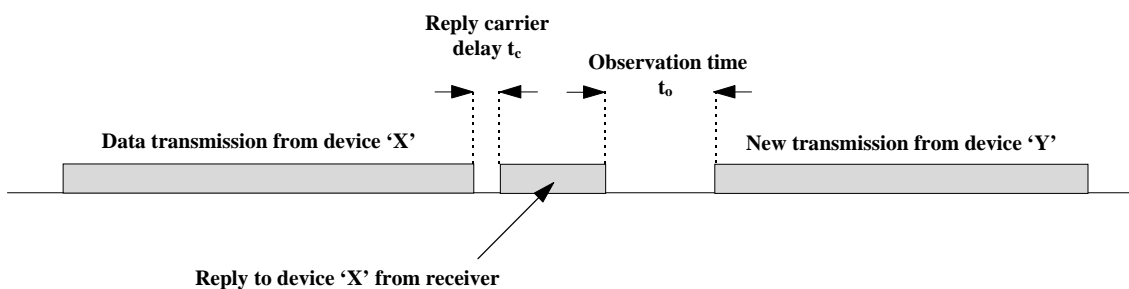


Figure 8: Channel access for a fixed rate of change of analogue level control

Figure 2 above illustrates a transmitting device used for a fixed rate of change level control. In general, it would be expected that for analogue level control for TV/hi-fi applications, the repeat repetition time would be typically every 115 ms for a 64 step range. For this type of application, only a small number of level steps would typically be required, lasting a few seconds. Allowance shall obviously be made for a mean Observation time of about 10 ms when designing for a given average repetition rate in this case (assuming an access packet length of < 12 ms).

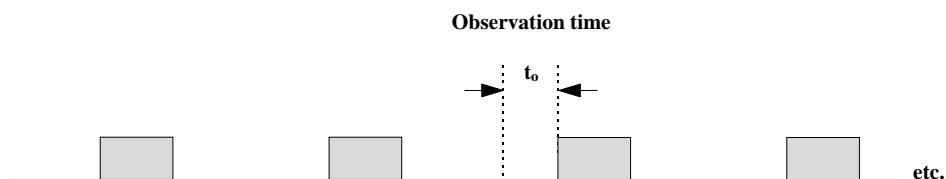


Figure 9: Channel access using maximum transmit time

Figure 3 above illustrates a transmitting device transferring data at the maximum permissible throughput allowed by the protocol. Also in this example there are no other devices competing for the radio channel. A Priority delay of 8 ms shall be included in the Observation time in this case. Such applications are subject to the overall duty cycle specified in subclause 6.7.

9 Measurement uncertainty

Table 3: Absolute measurement uncertainties: maximum values

All timings	5 %
-------------	-----

Annex A (normative): Radiated measurement

A.1 Test sites and general arrangements for measurements involving the use of radiated fields

This normative annex introduces three most commonly available test sites, an anechoic chamber, an anechoic chamber with a ground plane and an Open Area Test Site (OATS), which may be used for radiated tests. These test sites are generally referred to as free field test sites. Both absolute and relative measurements can be performed in these sites. Where absolute measurements are to be carried out, the chamber should be verified. A detailed verification procedure is described in ETR 273 relevant parts 2, 3 and 4.

NOTE: To ensure reproducibility and traceability of radiated measurements only these test sites should be used in type test measurements.

A.1.1 Anechoic chamber

An anechoic chamber is an enclosure, usually shielded, whose internal walls, floor and ceiling are covered with radio absorbing material, normally of the pyramidal urethane foam type. The chamber usually contains an antenna support at one end and a turntable at the other. A typical anechoic chamber is shown in figure A.1.

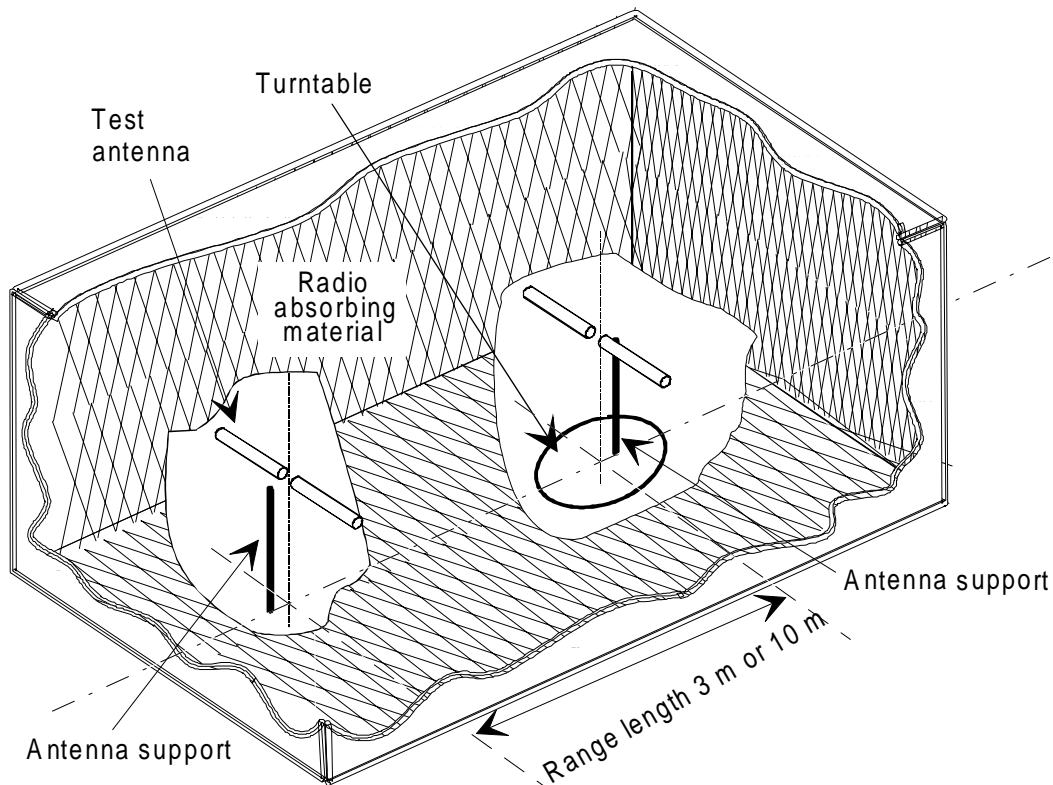


Figure A.1: A typical anechoic chamber

The chamber shielding and radio absorbing material work together to provide a controlled environment for testing purposes. This type of test chamber attempts to simulate free space conditions.

The shielding provides a test space, with reduced levels of interference from ambient signals and other outside effects, whilst the radio absorbing material minimizes unwanted reflections from the walls and ceiling which can influence the measurements. In practice it is relatively easy for shielding to provide high levels (80 dB to 140 dB) of ambient interference rejection, normally making ambient interference negligible.

A turntable is capable of rotation through 360° in the horizontal plane and it is used to support the test sample (EUT) at a suitable height (e.g. 1 m) above the ground plane. The chamber shall be large enough to allow the measuring distance of at least 3 m or $2(d_1+d_2)^2/\lambda$ (m), whichever is greater (see subclause A.2.5). The distance used in actual measurements shall be recorded with the test results.

The anechoic chamber generally has several advantages over other test facilities. There is minimal ambient interference, minimal floor, ceiling and wall reflections and it is independent of the weather. It does however have some disadvantages which include limited measuring distance and limited lower frequency usage due to the size of the pyramidal absorbers. To improve low frequency performance, a combination structure of ferrite tiles and urethane foam absorbers is commonly used.

All types of emission, sensitivity and immunity testing can be carried out within an anechoic chamber without limitation.

A.1.2 Anechoic chamber with a ground plane

An anechoic chamber with a ground plane is an enclosure, usually shielded, whose internal walls and ceiling are covered with radio absorbing material, normally of the pyramidal urethane foam type. The floor, which is metallic, is not covered and forms the ground plane. The chamber usually contains an antenna mast at one end and a turntable at the other. A typical anechoic chamber with a ground plane is shown in figure A.2.

This type of test chamber attempts to simulate an ideal OATS whose primary characteristic is a perfectly conducting ground plane of infinite extent.

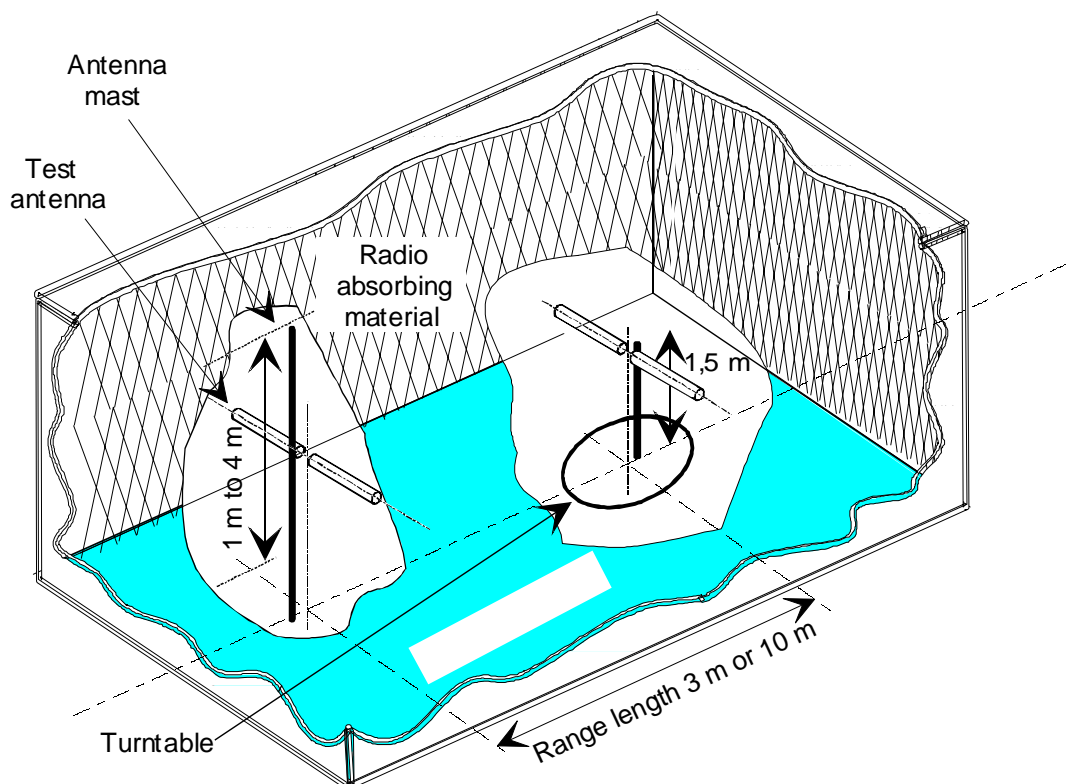


Figure A.2: A typical anechoic chamber with a ground plane

In this facility the ground plane creates the wanted reflection path, such that the signal received by the receiving antenna is the sum of the signals from both the direct and reflected transmission paths. This creates a unique received signal level for each height of the transmitting antenna (or EUT) and the receiving antenna above the ground plane.

The antenna mast provides a variable height facility (from 1 m to 4 m) so that the position of the test antenna can be optimized for maximum coupled signal between antennas or between an EUT and the test antenna.

A turntable is capable of rotation through 360° in the horizontal plane and it is used to support the test sample (EUT) at a specified height, usually 1,5 m above the ground plane. The chamber shall be large enough to allow the measuring distance of at least 3 m or $2(d_1+d_2)^2/\lambda$ (m), whichever is greater (see subclause A.2.5). The distance used in actual measurements shall be recorded with the test results.

Emission testing involves firstly "peaking" the field strength from the EUT by raising and lowering the receiving antenna on the mast (to obtain the maximum constructive interference of the direct and reflected signals from the EUT) and then rotating the turntable for a "peak" in the azimuth plane. At this height of the test antenna on the mast, the amplitude of the received signal is noted. Secondly the EUT is replaced by a substitution antenna (positioned at the EUT's phase or volume centre) which is connected to a signal generator. The signal is again "peaked" and the signal generator output adjusted until the level, noted in stage one, is again measured on the receiving device.

Receiver sensitivity tests over a ground plane also involve 'peaking' the field strength by raising and lowering the test antenna on the mast to obtain the maximum constructive interference of the direct and reflected signals, this time using a measuring antenna which has been positioned where the phase or volume centre of the EUT will be during testing. A transform factor is derived. The test antenna remains at the same height for stage two, during which the measuring antenna is replaced by the EUT. The amplitude of the transmitted signal is reduced to determine the field strength level at which a specified response is obtained from the EUT.

A.1.3 OATS

An OATS comprises a turntable at one end and an antenna mast of variable height at the other end above a ground plane which, in the ideal case, is perfectly conducting and of infinite extent. In practice, whilst good conductivity can be achieved, the ground plane size has to be limited. A typical OATS is shown in figure A.3.

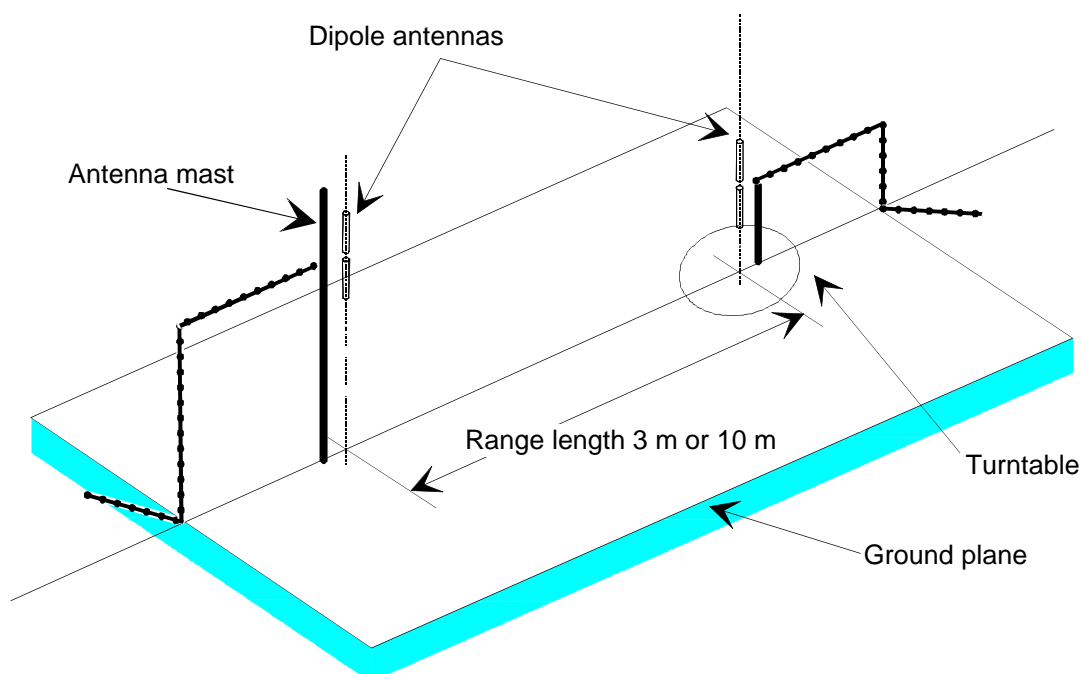


Figure A.3: A typical OATS

The ground plane creates a wanted reflection path, such that the signal received by the receiving antenna is the sum of the signals received from the direct and reflected transmission paths. The phasing of these two signals creates a unique received level for each height of the transmitting antenna (or EUT) and the receiving antenna above the ground plane.

Site qualification concerning antenna positions, turntable, measurement distance and other arrangements are same as for anechoic chamber with a ground plane. In radiated measurements an OATS is also used by the same way as anechoic chamber with a ground plane.

Typical measuring arrangement common for ground plane test sites is presented in figure A.4.

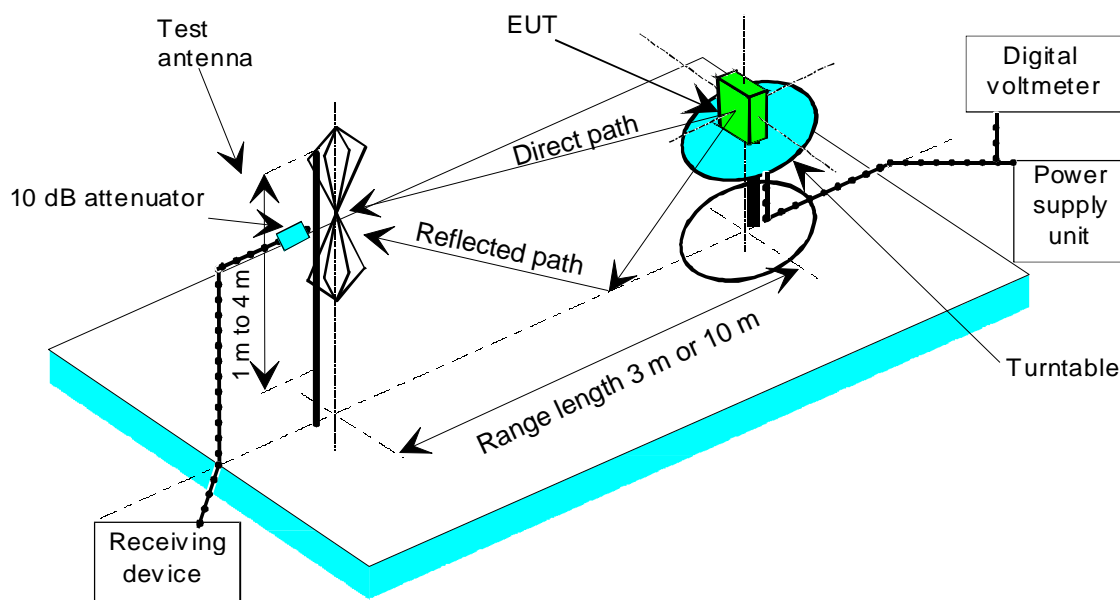


Figure A.4: Measuring arrangement on ground plane test site (OATS set-up for spurious emission testing)

A.1.4 Test antenna

A test antenna is always used in radiated test methods. In emission tests (i.e. frequency error, effective radiated power, spurious emissions and adjacent channel power) the test antenna is used to detect the field from the EUT in one stage of the measurement and from the substitution antenna in the other stage. When the test site is used for the measurement of receiver characteristics (i.e. sensitivity and various immunity parameters) the antenna is used as the transmitting device.

The test antenna should be mounted on a support capable of allowing the antenna to be used in either horizontal or vertical polarization which, on ground plane sites (i.e. anechoic chambers with ground planes and OATS), should additionally allow the height of its centre above the ground to be varied over the specified range (usually 1 m to 4 m).

In the frequency band 30 MHz to 1 000 MHz, dipole antennas (constructed in accordance with ANSI C63.5) are generally recommended. For frequencies of 80 MHz and above, the dipoles should have their arm lengths set for resonance at the frequency of test. Below 80 MHz, shortened arm lengths are recommended. For spurious emission testing, however, a combination of bicones and log periodic dipole array antennas (commonly termed "log periodics") could be used to cover the entire 30 MHz to 1 000 MHz band. Above 1 000 MHz, waveguide horns are recommended although, again, log periodics could be used.

NOTE: The gain of a horn antenna is generally expressed relative to an isotropic radiator.

A.1.5 Substitution antenna

The substitution antenna is used to replace the EUT for tests in which a transmitting parameter (i.e. frequency error, effective radiated power, spurious emissions and adjacent channel power) is being measured. For measurements in the frequency band 30 MHz to 1 000 MHz, the substitution antenna should be a dipole antenna (constructed in accordance with ANSI C63.5). For frequencies of 80 MHz and above, the dipoles should have their arm lengths set for resonance at the frequency of test. Below 80 MHz, shortened arm lengths are recommended. For measurements above 1 000 MHz, a waveguide horn is recommended. The centre of this antenna should coincide with either the phase centre or volume centre (as specified in the test method) of the EUT it has replaced.

A.1.6 Measuring antenna

The measuring antenna is used in tests on an EUT in which a receiving parameter (i.e. sensitivity and various immunity tests) is being measured. Its purpose is to enable a measurement of the electric field strength in the vicinity of the EUT. For measurements in the frequency band 30 MHz to 1 000 MHz, the measuring antenna should be a dipole antenna (constructed in accordance with ANSI C63.5). For frequencies of 80 MHz and above, the dipoles should have their arm lengths set for resonance at the frequency of test. Below 80 MHz, shortened arm lengths are recommended. The centre of this antenna should coincide with either the phase centre or volume centre (as specified in the test method) of the EUT.

A.2 Guidance on the use of radiation test sites

This clause details procedures, test equipment arrangements and verification that should be carried out before any of the radiated test are undertaken. These schemes are common to all types of test sites described in this annex.

A.2.1 Verification of the test site

No test should be carried out on a test site which does not possess a valid certificate of verification. The verification procedures for the different types of test sites described in this annex (i.e. anechoic chamber, anechoic chamber with a ground plane and OATS) are given in ETR 273 parts 2, 3 and 4, respectively.

A.2.2 Preparation of the EUT

The manufacturer should supply information about the EUT covering the operating frequency, polarization, supply voltage(s) and the reference face. Additional information, specific to the type of EUT should include, where relevant, carrier power, CSP, whether different operating modes are available (e.g. high and low power modes) and if operation is continuous or is subject to a maximum test duty cycle (e.g. 1 m on, 4 m off).

Where necessary, a mounting bracket of minimal size should be available for mounting the EUT on the turntable. This bracket should be made from low conductivity, low relative dielectric constant (i.e. less than 1,5) material(s) such as expanded polystyrene, balsa wood, etc.

A.2.3 Power supplies to the EUT

All tests should be performed using power supplies wherever possible, including tests on EUT designed for battery-only use. In all cases, power leads should be connected to the EUT's supply terminals (and monitored with a digital voltmeter) but the battery should remain present, electrically isolated from the rest of the equipment, possibly by putting tape over its contacts.

The presence of these power cables can, however, affect the measured performance of the EUT. For this reason, they should be made to be "transparent" as far as the testing is concerned. This can be achieved by routing them away from the EUT and down to the either the screen, ground plane or facility wall (as appropriate) by the shortest possible paths. Precautions should be taken to minimize pick-up on these leads (e.g. the leads could be twisted together, loaded with ferrite beads at 0,15 m spacing or otherwise loaded).

Details shall be included in the test report.

A.2.4 Volume control setting for analogue speech tests

Unless otherwise stated, in all receiver measurements for analogue speech the receiver volume control where possible, should be adjusted to give at least 50 % of the rated audio output power. In the case of stepped volume controls, to volume control should be set to the first step that provides an output power of at least 50 % of the rated audio output power. This control should not be readjusted between normal and extreme test conditions in tests.

A.2.5 Range length

The range length for all these types of test facility should be adequate to allow for testing in the far-field of the EUT i.e. it should be equal to or exceed:

$$\frac{2(d_1 + d_2)^2}{\lambda}$$

where:

- d_1 is the largest dimension of the EUT / dipole after substitution (m);
- d_2 is the largest dimension of the test antenna (m);
- λ is the test frequency wavelength (m).

It should be noted that in the substitution part of this measurement, where both test and substitution antennas are half wavelength dipoles, this minimum range length for far-field testing would be:

$$2\lambda$$

It should be noted in the test report when either of these conditions is not met so that the additional measurement uncertainty can be incorporated into the results.

NOTE 1: **For the fully anechoic chamber**, no part of the volume of the EUT should, at any angle of rotation of the turntable, fall outside the "quiet zone" of the chamber at the nominal frequency of the test.

NOTE 2: The "quiet zone" is a volume within the anechoic chamber (without a ground plane) in which a specified performance has either been proven by test, or is guaranteed by the designer / manufacture. The specified performance is usually the reflectivity of the absorbing panels or a directly related parameter (e.g. signal uniformity in amplitude and phase). It should be noted however that the defining levels of the quiet zone tend to vary.

NOTE 3: **For the anechoic chamber with a ground plane**, a full height scanning capability, i.e. 1 m to 4 m, should be available for which no part of the test antenna should come within 1 m of the absorbing panels. For both types of **anechoic chamber**, the reflectivity of the absorbing panels should not be worse than -5 dB.

NOTE 4: **For both the anechoic chamber with a ground plane and the OATS**, no part of any antenna should come within 0,25 m of the ground plane at any time throughout the tests. Where any of these conditions cannot be met, measurements should not be carried out.

A.2.6 Site preparation

The cables for both ends of the test site should be routed horizontally away from the testing area for a minimum of 2 m (unless, in the case both types of **anechoic chamber**, a back wall is reached) and then allowed to drop vertically and out through either the ground plane or screen (as appropriate) to the test equipment. Precautions should be taken to minimize pick up on these leads (e.g. dressing with ferrite beads, or other loading). The cables, their routing and dressing should be identical to the verification set-up.

NOTE: For ground reflection test sites (**i.e. anechoic chambers with ground planes and OATS**) which incorporate a cable drum with the antenna mast, the 2 m requirement may be impossible to comply with.

Calibration data for all items of test equipment should be available and valid. For test, substitution and measuring antennas, the data should include gain relative to an isotropic radiator (or antenna factor) for the frequency of test. Also, the VSWR of the substitution and measuring antennas should be known.

The calibration data on all cables and attenuators should include insertion loss and VSWR throughout the entire frequency range of the tests. All VSWR and insertion loss figures should be recorded in the log book results sheet for the specific test.

Where correction factors / tables are required, these should be immediately available.

For all items of test equipment, the maximum errors they exhibit should be known along with the distribution of the error e.g.:

- cable loss: $\pm 0,5$ dB with a rectangular distribution;
- measuring receiver: 1,0 dB (standard deviation) signal level accuracy with a Gaussian error distribution.

At the start of measurements, system checks should be made on the items of test equipment used on the test site.

A.3 Coupling of signals

A.3.1 General

The presence of leads in the radiated field may cause a disturbance of that field and lead to additional measurement uncertainty. These disturbances can be minimized by using suitable coupling methods, offering signal isolation and minimum field disturbance (e.g. optical and acoustic coupling).

A.3.2 Data Signals

Isolation can be provided by the use of optical, ultra sonic or infra red means. Field disturbance can be minimized by using a suitable fibre optic connection. Ultra sonic or infra red radiated connections require suitable measures for the minimization of ambient noise.

A.3.3 Speech and analogue signals

Where an audio output socket is not available an acoustic coupler should be used.

When using the acoustic coupler, care should be exercised that possible ambient noise does not influence the test result.

A.3.3.1 Acoustic coupler description

The acoustic coupler comprises a plastic funnel, an acoustic pipe and a microphone with a suitable amplifier. The materials used to fabricate the funnel and pipe should be of low conductivity and of low relative dielectric constant (i.e. less than 1,5).

- The acoustic pipe should be long enough to reach from the EUT to the microphone which should be located in a position that will not disturb the RF field. The acoustic pipe should have an inner diameter of about 6 mm and a wall thickness of about 1,5 mm and should be sufficiently flexible so as not to hinder the rotation of the turntable;
- the plastic funnel should have a diameter appropriate to the size of the loudspeaker in the EUT, with soft foam rubber glued to its edge, it should be fitted to one end of the acoustic pipe and the microphone should be fitted to the other end. It is very important to fix the centre of the funnel in a reproducible position relative to the EUT, since the position of the centre has a strong influence on the frequency response that will be measured. This can be achieved by placing the EUT in a close fitting acoustic mounting jig, supplied by the manufacturer, of which the funnel is an integral part;

- the microphone should have a response characteristic flat within 1 dB over a frequency range of 50 Hz to 20 kHz, a linear dynamic range of at least 50 dB. The sensitivity of the microphone and the receiver audio output level should be suitable to measure a signal to noise ratio of at least 40 dB at the nominal audio output level of the EUT. Its size should be sufficiently small to couple to the acoustic pipe;
- the frequency correcting network should correct the frequency response of the acoustic coupler so that the acoustic SINAD measurement is valid (see IEC Publication 489-3 appendix F).

A.3.3.2 Calibration

The aim of the calibration of the acoustic coupler is to determine the acoustic SINAD ratio which is equivalent to the SINAD ratio at the receiver output.

Bibliography

The following material, though not specifically referenced in the body of the present document (or not publicly available), gives supporting information.

- ETSI/STC-RES 02(97)011: "Radio Channel Access Protocol for Short Range Applications".
- ETS 300 471: "Radio Equipment and Systems (RES); Land Mobile Service; Access protocol, occupation rules and corresponding technical characteristics of radio equipment for the transmission of data on shared channels".
- FM26(96) 38: Letter from Philips (NL), "Comments to DSI phase 2".
- FM26(96) 120: Letter from Bosch Telecom (D), "Request for frequency".
- FM26(96) 127: Letter from Landis & Gyr,(CH), "Request for frequency".
- FM26(96) 146: Letter from EHSA, "System description for 868 MHz SRD".
- FM26(96) 148: Letter from Philips (UK), "Radio channel access protocol description".
- FM26(96) 155: EACEM letter "Establishing an Access Protocol through the ERO with EHSA collaboration".
- FM26(96) 164: Letter from Bosch Telecom (D), to CEPT/ERC/FM PT26.
- FM26(96) 171: Landis & Gyr (CH), Comments to duty cycle.
- FM26(96) 180: Bandplan comments from LPRA to CEPT/ERC/FM PT26.
- ETSI TC RES(97)016: European Home Systems Association (EHSA) letter of support.
- ETSI/TC RES(97)040, part B 10.3.3: TC RES 22nd meeting.
- E-WPS DE/RES02-zz.

History

Document history			
V1.1.1	November 1998	Public Enquiry	PE 9913: 1998-11-27 to 1999-03-26