

Draft **ETSI EN 303 345** V1.1.1 (2016-07)



**Broadcast Sound Receivers;
Harmonised Standard covering the essential requirements
of article 3.2 of Directive 2014/53/EU**

Reference

DEN/ERM-TG17-15

Keywordsbroadcast, digital, Harmonised standard, radio,
receiver**ETSI**

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important noticeThe present document can be downloaded from:
<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at
<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:
<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2016.
All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.
3GPP™ and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.
GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	5
Foreword.....	5
Modal verbs terminology.....	5
Introduction	5
1 Scope	6
2 References	6
2.1 Normative references	6
2.2 Informative references.....	6
3 Definitions and abbreviations.....	7
3.1 Definitions.....	7
3.2 Abbreviations	7
4 Technical requirements specifications	8
4.1 Environmental profile.....	8
4.2 Conformance requirements	8
4.2.1 Broadcast radio modulation methods.....	8
4.2.2 Broadcast radio frequency bands	8
4.2.3 Test signal configurations.....	9
4.2.3.1 AM testing.....	9
4.2.3.2 FM testing	9
4.2.3.3 DAB testing.....	10
4.2.3.4 DRM testing.....	10
4.2.4 Sensitivity	10
4.2.4.1 Definition	10
4.2.4.2 Limits	10
4.2.4.3 Conformance.....	11
4.2.5 Adjacent channel selectivity and blocking.....	11
4.2.5.1 Definition	11
4.2.5.2 Limits	12
4.2.5.3 Conformance.....	13
4.2.6 Unwanted emissions in the spurious domain	13
4.2.6.1 Definition	13
4.2.6.2 Limits	13
4.2.6.3 Conformance.....	13
5 Testing for compliance with technical requirements.....	13
5.1 Environmental conditions for testing	13
5.2 Interpretation of the measurement results	14
5.3 Methods of measurement	14
5.3.1 Generic methods of measurement.....	14
5.3.2 Generic measurement set-up for radiated testing.....	15
5.3.3 Generic measurement set-up for equipment for conducted testing	16
5.3.4 Sensitivity measurement methods.....	17
5.3.4.1 AM and FM sensitivity measurements.....	17
5.3.4.2 DAB and DRM sensitivity measurements	17
5.3.5 Adjacent channel selectivity and blocking measurement methods	17
5.3.5.1 AM and FM adjacent channel selectivity and blocking measurements.....	17
5.3.5.2 DAB and DRM adjacent channel selectivity and blocking measurements	18
5.3.6 Unwanted emissions in the spurious domain	18
5.3.6.1 Methods of measurement	18
Annex A (normative): Relationship between the present document and the essential requirements of Directive 2014/53/EU	19
Annex B (informative): Commentary on development of the present document.....	20

Annex C (informative): **Change History**21
History22

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This draft Harmonised European Standard (EN) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM), and is now submitted for the combined Public Enquiry and Vote phase of the ETSI standards EN Approval Procedure.

The present document has been prepared under the Commission's standardisation request C(2015) 5376 final [i.9] to provide one voluntary means of conforming to the essential requirements of Directive 2014/53/EU on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC [i.1].

Once the present document is cited in the Official Journal of the European Union under that Directive, compliance with the normative clauses of the present document given in table A.1 confers, within the limits of the scope of the present document, a presumption of conformity with the corresponding essential requirements of that Directive, and associated EFTA regulations.

Proposed national transposition dates	
Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	18 months after doa

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Introduction

The present document describes the requirements for radio broadcast receivers to meet the essential requirements of article 3.2 of Directive 2014/53/EU [i.1].

1 Scope

The present document applies to devices, including the supplied antenna, that receive broadcast sound services, whether analogue or digital modulation is used. Multi-function devices may also fall under the requirements of other documents.

The present document contains requirements to demonstrate that radio equipment both effectively uses and supports the efficient use of radio spectrum in order to avoid harmful interference.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] ETSI EN 300 401 (V1.4.1) (06-2006): "Radio Broadcasting Systems; Digital Audio Broadcasting (DAB) to mobile, portable and fixed receivers".
- [2] ETSI ES 201 980 (V4.1.1) (01-2014): "Digital Radio Mondiale (DRM); System Specification".
- [3] CENELEC EN 55032:2015: "Electromagnetic compatibility of multimedia equipment - Emission Requirements".
- [4] CENELEC EN 55020:2007: "Sound and television broadcast receivers and associated equipment - Immunity characteristics - Limits and methods of measurement".
- [5] Recommendation ITU-R BS.559-2 (06/1990): "Objective measurement of radio-frequency protection ratios in LF, MF and HF broadcasting".
- [6] Recommendation ITU-R BS.468-4 (07/1986): "Measurement of audio-frequency noise voltage level in sound broadcasting".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] Directive 2014/53/EU of the European Parliament and of the Council of 16 April 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC.
- [i.2] ETSI TR 100 028-1: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1".

- [i.3] ETSI TR 100 028-2: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2".
- [i.4] ECA table at www.efis.dk.
- [i.5] Recommendation ITU-R BS.1615-1: "Planning parameters for digital sound broadcasting at frequencies below 30 MHz".
- [i.6] Recommendation ITU-R BS.641: "Determination of radio-frequency protection ratios for frequency-modulated sound broadcasting".
- [i.7] CEPT/ERC/Recommendation 74-01E (2011): "Unwanted emissions in the spurious domain".
- [i.8] CISPR 35: "Electromagnetic Compatibility of Multimedia equipment - Immunity Requirements".
- [i.9] Commission Implementing Decision C(2015) 5376 final of 4.8.2015 on a standardisation request to the European Committee for Electrotechnical Standardisation and to the European Telecommunications Standards Institute as regards radio equipment in support of Directive 2014/53/EU of the European Parliament and of the Council.

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

adjacent channel selectivity: at a given frequency separation, the ratio of the maximum unwanted signal level to the wanted signal level necessary to provide a given level of audio quality

blocking: at a given frequency separation, the ratio of the maximum AM unwanted signal level to the wanted signal level necessary to provide a given level of audio quality

built-in antenna: antenna that cannot be detached from the equipment

dBm: decibels relative to 1 mW of power

dBQ: audio decibels after Recommendation ITU-R 468-4 [6] noise weighting and a quasi-peak detector have been applied

dB μ V: decibels relative to 1 μ V

dB μ V/m: decibels relative to 1 μ V/m

external antenna: antenna designed to be connected to the equipment with the use of a 50 Ω or 75 Ω external connector

integral antenna: antenna designed to be connected to the equipment without the use of a 50 Ω or 75 Ω external connector and considered to be part of the equipment

NOTE: A device that uses a supplied earphone as the antenna has an integral antenna.

sensitivity: minimum wanted signal level required to provide a given level of audio quality

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AAC	Advanced Audio Coding
AM	Amplitude Modulation
AMSS	Amplitude Modulation Signalling System
BS	Broadcast Sound
CISPR	Comité International Spécial des Perturbations Radioélectriques

DAB	Digital Audio Broadcasting
DRM	Digital Radio Mondiale
ECA	European Common Allocation
EEP	Equal Error Protection
EFTA	European Free Trade Area
FAR	Fully Anechoic Room
FM	Frequency Modulation
HF	High Frequency
ITU-R	International Telecommunications Union - Radiocommunications
LF	Low Frequency
MF	Medium Frequency
MSC	Main Service Channel
PC	Personal Computer
RDS	Radio Data System
RF	Radio Frequency
RM	Robustness Mode
RMS	Root Mean Square
SAC	Semi Anechoic Chamber
SNR	Signal to Noise Ratio
TEM	Transverse Electro-Magnetic
UI	User Interface
VHF	Very High Frequency

4 Technical requirements specifications

4.1 Environmental profile

The technical requirements of the present document apply under the environmental profile for operation of the equipment, which shall be declared by the manufacturer. The equipment shall comply with all the technical requirements of the present document at all times when operating within the boundary limits of the declared operational environmental profile.

4.2 Conformance requirements

4.2.1 Broadcast radio modulation methods

The following broadcast radio modulation methods are considered feasible within the current authorization regime in Europe:

- Amplitude modulation, with or without AMSS (AM).
- Frequency modulation, with or without RDS (FM).
- Digital Audio Broadcasting (DAB).
- Digital Radio Mondiale (DRM).

Broadcast radio receivers may include demodulation capability for one or more of these modulation methods. Conformance shall only be required for each of the modulation methods included in the receiver.

4.2.2 Broadcast radio frequency bands

The following frequency bands are identified in the ECA table [i.4] for broadcast radio services:

- Low frequency (LF): 148,5 kHz to 283,5 kHz.
- Medium frequency (MF): 526,5 kHz to 1 606,5 kHz.

- High Frequency (HF): 3 950 kHz to 4 000 kHz, 5 900 kHz to 6 200 kHz, 7 200 kHz to 7 450 kHz, 9 400 kHz to 9 900 kHz, 11 600 kHz to 12 100 kHz, 13 570 kHz to 13 870 kHz, 15 100 kHz to 15 800 kHz, 17 480 kHz to 17 900 kHz, 18 900 kHz to 19 020 kHz, 21 450 kHz to 21 850 kHz and 25 670 kHz to 26 100 kHz.
- VHF band I: 47 MHz to 68 MHz.
- VHF band II: 87,5 MHz to 108 MHz.
- VHF band III: 174 MHz to 240 MHz.

Broadcast radio receivers may include tuning capability for one or more of these frequency bands. Conformance shall only be required for each of the frequency bands included in the receiver.

4.2.3 Test signal configurations

4.2.3.1 AM testing

The generated AM signals (wanted, unwanted and blocking) shall be in accordance with table 1. The configuration is based on Recommendation ITU-R BS.1615-1 [i.5].

Table 1: AM configuration

Parameter	AM signals		
	<i>Wanted</i>	<i>Unwanted</i>	<i>Blocking</i>
Audio modulation	1 kHz tone	Weighted noise Recommendation ITU-R BS.559-2 [5]	1 kHz tone
	Band-limited to 4,5 kHz		
Other modulation parameters	40 %	50 % quasi-peak	80 % depth

4.2.3.2 FM testing

The generated FM signals (wanted and unwanted) and the blocking signal shall be in accordance with table 2. The configuration is based on Recommendation ITU-R BS.641 [i.6].

Table 2: FM configuration

Parameter	FM signals		AM signal
	<i>Wanted</i>	<i>Unwanted</i>	<i>Blocking</i>
Audio modulation	1 kHz tone	Weighted noise Recommendation ITU-R BS.559-2 [5]	1 kHz tone
	Band-limited to 15 kHz		
Other modulation parameters	±60,8 kHz peak deviation	32 kHz quasi-peak deviation (see note)	80 % depth
Pilot tone	None	None	
NOTE: This is equivalent to 19 kHz RMS deviation in the absence of pre-emphasis.			

4.2.3.3 DAB testing

The generated DAB signals (wanted and unwanted) and the blocking signal shall be in accordance in table 3.

Table 3: DAB configuration

Parameter	DAB signal			AM signal
	<i>Wanted and Unwanted</i>			<i>Blocking</i>
Audio modulation	Service label: "Sine+" 1 kHz tone at a level of -3 dBFS Coding: mono, 128 kbit/s AAC			1 kHz tone
Other modulation parameters	DAB signal with EEP-3A to ETSI EN 300 401 [1]			80 % depth

4.2.3.4 DRM testing

The generated DRM signals (wanted and unwanted) and the blocking signal shall be in accordance in table 4.

Table 4: DRM configuration

Parameter	DRM signal				AM signal
	<i>Wanted and Unwanted</i>				<i>Blocking</i>
Audio coding	Service label: "Sine +" 1 kHz tone at a level of -3 dBFS Coding: mono AAC at maximum permitted rate				1 kHz tone
Frequency band		LF/MF	HF	VHF	
Channel coding parameters	RM flag	0	0	1	
	protection level	1	1	2	
	MSC mode	0	0	0	
	interleaver depth	1	1	0	
	robustness mode	B	B	E	
	spectrum occupancy	2	3	0	
Other modulation Parameters	DRM signal to ETSI ES 201 980 [2].				80 % depth

4.2.4 Sensitivity

4.2.4.1 Definition

The receiver sensitivity is the minimum wanted signal level required to provide a given level of audio quality.

The appropriate measure of audio quality, known as the impairment criteria, are specified for each modulation type.

4.2.4.2 Limits

The limits for sensitivity specified in table 5 shall apply. Each figure quoted is the required level of wanted signal which provides a given level of audio quality. The audio impairment criteria relevant for these tests for the different demodulation types are given in table 6.

Table 5: Sensitivity requirements

Test	De-modulation	Tuned frequency band	Wanted signal centre frequency (MHz)	Required sensitivity limit	
				Conducted (dBm)	Radiated (dBµV/m)
1	AM	LF	0,216	-65	74
2		MF	0,999	-65	66
3		HF	9,9	-65	60
4	FM	VHF band II	98	-90	50 (note 1)
5	DAB	VHF band III	202,928	-98	33 (note 2)
6	DRM	LF	0,216	-101	58
7		MF	0,999	-101	52
8		HF1	4	-101	44
9		HF2	19	-101	40
10		VHF band I	65	-102	45
11		VHF band II	100	-102	46
12		VHF band III	200	-102	51

NOTE 1: For products with an integral antenna, the requirement is relaxed to 67 dBµV/m.
NOTE 2: For products with an integral antenna, the requirement is relaxed to 50 dBµV/m.

Table 6: Impairment criteria for sensitivity tests

Demodulation	Impairment criteria
AM	SNR \geq 28 dBQ ref 40 % AM
FM	SNR \geq 40 dBQ ref \pm 60,8 kHz deviation; clean audio (see note 1)
DAB	Clean audio (see note 2)
DRM	Clean audio (see note 2)

NOTE 1: Clean audio is defined as 10 seconds of audio with no subjective impairments (e.g. clicks resulting from FM threshold effects).
NOTE 2: Clean audio is defined as 10 seconds of audio with no subjective impairments (e.g. muting, clicks, warbles or squeaks).

4.2.4.3 Conformance

Conformance tests as defined in clause 5.3 shall be carried out. Only demodulation systems supported by the receiver shall be tested. Only bands supported by the receiver shall be tested.

4.2.5 Adjacent channel selectivity and blocking

4.2.5.1 Definition

The adjacent channel selectivity at a given frequency separation, is the ratio of the maximum unwanted signal level to the wanted signal level necessary to provide a given level of audio quality. The wanted and unwanted signals are of the same modulation type.

The blocking ratio at a given frequency separation, is the ratio of the maximum AM unwanted signal level to the wanted signal level necessary to provide a given level of audio quality.

The appropriate measure of audio quality, known as the impairment criteria, are specified for each modulation type.

In order to provide effective use of spectrum, devices shall be able to demodulate the tuned signal in the presence of similar signals in adjacent channels. The first, second and third adjacent channels both above and below the tuned signal shall be tested. In addition, testing shall also be performed to check the ability of the receiver to work effectively with interfering signals at a greater separation from the wanted signal (blocking). The channel spacings specified in table 7 shall apply.

Table 7: Channel spacing for adjacent channel selectivity and blocking

Demodulation	Tuned frequency band	Unwanted frequency (N = 1, 2, 3)	Unwanted frequency (blocking)
AM	LF	$\pm N \times 9$ kHz	± 90 kHz
	MF	$\pm N \times 9$ kHz	± 90 kHz
	HF	$\pm N \times 10$ kHz	± 100 kHz
FM	VHF band II	$\pm N \times 100$ kHz	± 800 kHz
DAB	VHF band III	$\pm N \times 1\,712$ kHz	± 12 MHz
DRM	LF	$\pm N \times 9$ kHz	± 90 kHz
	MF	$\pm N \times 9$ kHz	± 90 kHz
	HF	$\pm N \times 10$ kHz	± 100 kHz
	VHF band I	$\pm N \times 100$ kHz	± 800 kHz
	VHF band II	$\pm N \times 100$ kHz	± 800 kHz
	VHF band III	$\pm N \times 100$ kHz	± 800 kHz

4.2.5.2 Limits

The limits for selectivity and blocking specified in table 8 shall apply with the channel spacings given in table 7. Each figure quoted is the minimum acceptable level of unwanted signal, relative to that of the wanted signal, which provides a given level of audio quality. The audio impairment criteria relevant for these tests for the different demodulation types are given in table 9.

Table 8: Adjacent channel selectivity and blocking requirements

Test	De-modulation	Tuned frequency band	C Wanted signal centre frequency (MHz)	C Wanted signal level		Required I/C ratio (see notes 1 and 2)			
				Conducted (dBm)	Radiated (dB μ V/m)	N = 1 (dB)	N = 2 (dB)	N = 3 (dB)	Blocking (dB)
1	AM (built-in or integral antenna)	LF	0,216	n/a	80	-30	10	20	20
2		MF	0,999	n/a	72	-30	10	20	20
3		HF	9,9	n/a	66	-30	10	20	20
4	AM (external antenna)	LF	0,216	-59	n/a	-5	25	35	40
5		MF	0,999	-59	n/a	-5	25	35	40
6		HF	9,9	-59	n/a	-5	25	35	40
7	FM (built-in or integral antenna)	VHF band II	98	n/a	51	-23	-15	-3	20
8	FM (external antenna)	VHF band II	98	-89	n/a	-23	3	17	30
9	DAB	VHF band III	202,928	-70	61	35	40	45	40
10	DRM	LF	0,216	-91	68	25	35	45	50
11		MF	0,999	-91	62	25	35	45	50
12		HF1	4	-91	54	25	35	45	50
13		HF2	19	-91	54	25	35	45	50
14		VHF band I	65	-91	50	35	40	45	50
15		VHF band II	100	-92	55	35	40	45	50
16		VHF band III	200	-92	61	35	40	45	50

NOTE 1: The frequency of the interferer shall be calculated using the channel spacing data in table 7 for each of the 6 defined adjacent channels $N = \{-3, -2, -1, +1, +2, +3\}$ and the two blocking offsets. Each row of table 8 thus defines 8 individual tests.

NOTE 2: The minimum level of I for the relevant level of impairment is calculated by adding the I/C ratio to the wanted C level.

Table 9: Impairment criteria for adjacent channel selectivity and blocking tests

Demodulation	Impairment criteria
AM	SNR \geq 28 dBQ ref 40 % AM
FM	SNR \geq 40 dBQ ref \pm 60,8 kHz deviation; clean audio (see note 1)
DAB	Clean audio (see note 2)
DRM	Clean audio (see note 2)
NOTE 1: Clean audio is defined as 10 seconds of audio with no subjective impairments (e.g. clicks resulting from FM threshold effects).	
NOTE 2: Clean audio is defined as 10 seconds of audio with no subjective impairments (e.g. muting, clicks, warbles or squeaks).	

4.2.5.3 Conformance

Conformance tests as defined in clause 5.3 shall be carried out. Only demodulation systems supported by the receiver shall be tested. Only bands supported by the receiver shall be tested.

4.2.6 Unwanted emissions in the spurious domain

4.2.6.1 Definition

Unwanted emissions in the spurious domain are emissions from the equipment in the frequency range defined by CEPT/ERC/Recommendation 74-01E [i.7].

4.2.6.2 Limits

The limits in CENELEC EN 55032 [3], Class B shall not be exceeded.

4.2.6.3 Conformance

Manufacturers shall provide a representative sample of the receiver system. The level of spurious emissions shall be measured by either:

- a) conducted (conducted differential voltage) emissions from an external RF port; and radiated emissions from the cabinet and structure of the equipment (cabinet radiation); or
- b) radiated emissions from the cabinet and the integral antenna.

Conformance tests as defined in clause 5.3 shall be carried out.

5 Testing for compliance with technical requirements

5.1 Environmental conditions for testing

The equipment shall be tested under normal test conditions according to the relevant product and basic standards or to the information accompanying the equipment, which are within the manufacturers declared range of humidity, temperature and supply voltage. The test conditions shall be recorded in the test report.

5.2 Interpretation of the measurement results

The interpretation of the results recorded in a test report for the measurements described in the present document shall be as follows:

- the measured value related to the corresponding limit shall be used to decide whether an equipment meets the requirements of the present document;
- the value of the measurement uncertainty for the measurement of each parameter shall be included in the test report;
- the recorded value of the measurement uncertainty shall be, for each measurement, equal to or lower than the figures in table 10.

For the test methods, according to the present document, the measurement uncertainty figures shall be calculated and shall correspond to an expansion factor (coverage factor) $k = 1,96$ or $k = 2$ (which provide confidence levels of respectively 95 % and 95,45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)). Principles for the calculation of measurement uncertainty are contained in ETSI TR 100 028-1 [i.2], in particular in annex D of the ETSI TR 100 028-2 [i.3].

Table 10 is based on such expansion factors.

Table 10: Maximum measurement uncertainty

Parameter	Uncertainty
Uncertainty in conducted measurements	± 1 dB
Uncertainty in radiated measurements	± 6 dB
Spurious emissions	See CENELEC EN 55032 [3]

5.3 Methods of measurement

5.3.1 Generic methods of measurement

Two generic methods of measurement are applicable to verifying the performance of the receiving equipment in question. The radiated test methods apply to receivers supplied with a built-in antenna or integral antenna. The conducted test methods apply to receivers supplied with an external antenna connector.

For both generic methods, two generators are needed. One provides the wanted signal, and the other the unwanted signal, or interferer (when required). The two signals are combined in such a way as to maintain isolation between the generators. It is necessary to provide calibrated attenuators for control of the individual levels; very often these will be built into the generators. Where the attenuators are external, cable lengths should be kept short to avoid cross-coupling effects.

The tests require the audio output of the receiver to be measured. The measurement device for the different modulation methods is given in table 11.

Table 11: Measurement device requirements

Modulation method	Measurement device on audio output
AM	quasi-peak detector employing Recommendation ITU-R BS.468-4 [6] weighting
FM	quasi-peak detector employing Recommendation ITU-R BS.468-4 [6] weighting
DAB	none (listen to audio)
DRM	none (listen to audio)

5.3.2 Generic measurement set-up for radiated testing

The measurement set-up is shown in figure 1. Details of the positioning of the receiver under test within the TEM-cell follow in figure 2. The measurement device, where external to the TEM-cell, shall be connected in such a way as to avoid either disturbance to the field within the cell or ingress of external interference. The following methods of connection for the audio output of the receiver to the external environment can be used:

- Electrical with a ferrite core or filter. For products using an earphone as antenna, an electrical method can be used if the audio signal is isolated from RF by using an adaptor to prevent antenna performance degradation. An example of such an adaptor is shown in figure 3.
- Acoustic, refer to annex G CISPR 35 [1.8] for guidance.
- Optical.

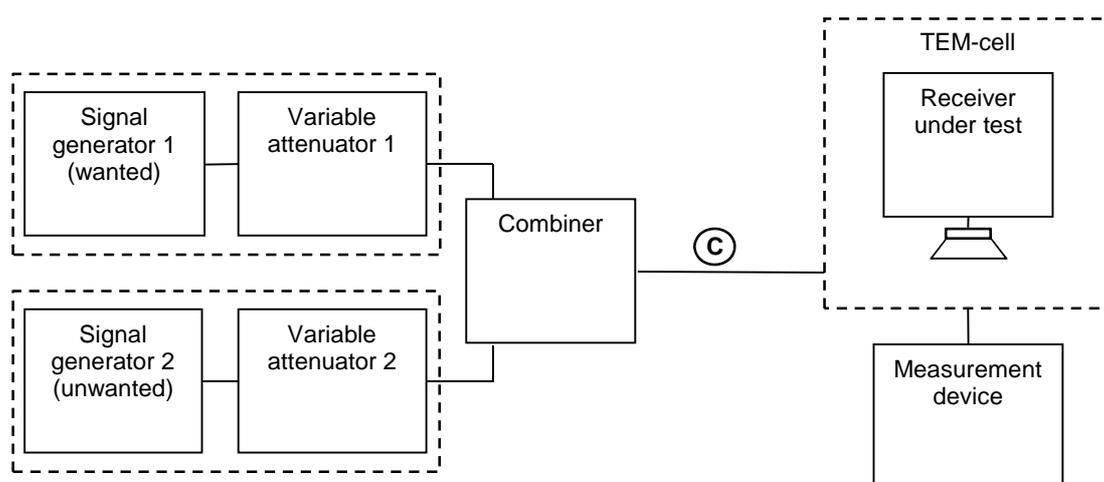


Figure 1: Generic measurement arrangement for receivers with built-in antennas

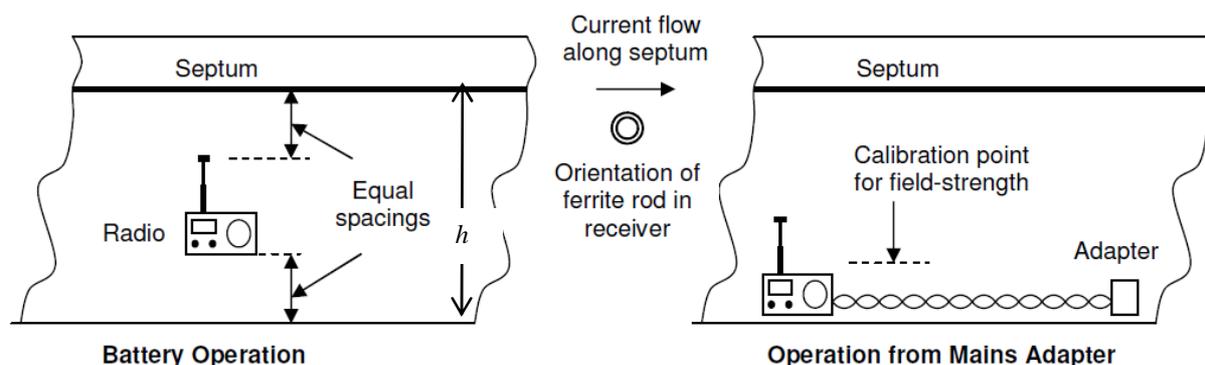


Figure 2: Diagram to show the positioning of receiver within TEM-cell

© represents the calibration point of the system. The power levels of the two generators are measured here, after which they can be converted into field-strengths within the cell. For a 50Ω system, if the power at © is P mW (0 dBm), the nominal field-strength E is given by $\sqrt{(50P) / h}$, where h is the height of the cell's septum above its floor. The exact relationship between P and E should be obtained from the manufacturer of the cell.

A Semi Anechoic Chamber (SAC) or Fully Anechoic Room (FAR) in compliance with CENELEC EN 55032 [3] may be used in place of a G-TEM cell.

For R.F. frequencies below 108 MHz only, an open stripline TEM device in combination with absorbing plates inside a screened room, as specified in CENELEC EN 55020 [4], may be used in place of a G-TEM cell. The positioning and dimensions described in CENELEC EN 55020 [4] shall be followed.

Receivers using a wire antenna (typically clock radios) shall be placed in the measuring environment such that the wire is fully contained within the calibrated zone. This may require the wire to be supported on a non-conducting structure.

Most portable AM receivers have internal ferrite rod antennas. TEM-cells generate E and H fields in the same proportion as would exist in free space. In figure 2, the axis of the ferrite rod should be perpendicular to the plane of the paper. An alternative way of generating a known magnetic field is by means of a test-loop, typically a single turn of wire about 300 mm in diameter and possessing an internal termination. Loops vary, and the manufacturer's instructions should be followed. The test-loop shall be used in a screened environment.

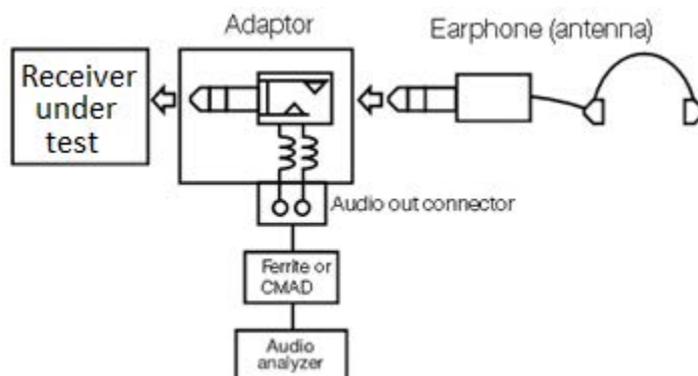


Figure 3: Example adaptor for products using earphone as antenna

5.3.3 Generic measurement set-up for equipment for conducted testing

The measurement set-up is shown in figure 4. In this case, there is no need for careful screening from the external environment, although high field-strengths from potential interferers should be avoided.

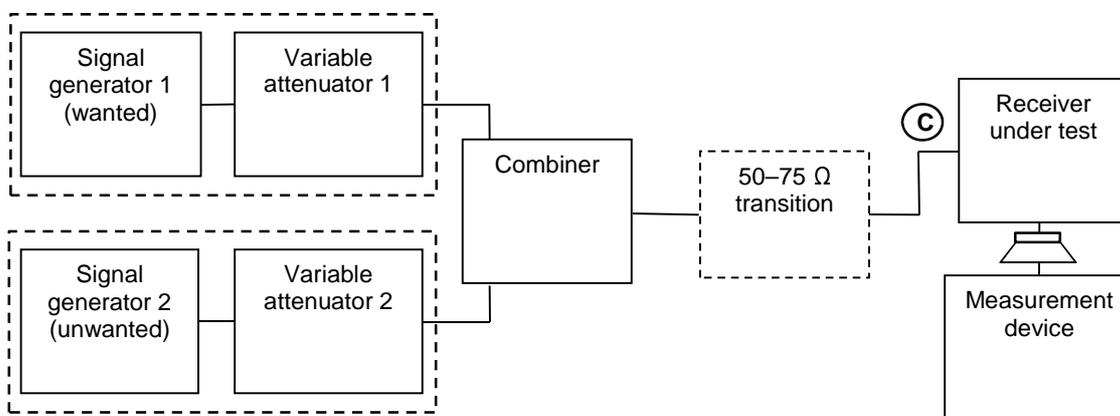


Figure 4: Generic measurement arrangement for receivers with external antennas

© represents the calibration point of the system. The power levels of the two generators are measured here. Most test equipment is designed for 50 Ω systems, whereas domestic equipment is usually 75 Ω . Where the absolute level needs to be known, allowance shall be made for the loss in the transition, typically 6 dB for a minimum loss pad and 0 dB for a transformer. Care should be taken not to mix 50 Ω connectors and 75 Ω connectors, or damage could result.

5.3.4 Sensitivity measurement methods

5.3.4.1 AM and FM sensitivity measurements

- 1) The 'unwanted' signal generator remains switched off for the duration of the test.
- 2) The 'wanted' signal generator is set to the required modulation method and test configuration as specified in clause 4.2.3, and to the frequency specified in clause 4.2.4. The signal level is adjusted to provide the level, as measured at ©, specified in clause 4.2.4 plus 30 dB.
- 3) The receiver is tuned to the frequency of the 'wanted' signal generator. The audio level shall be set so as to provide clean 1 kHz audio tone at the audio output (that is less than 10 % total harmonic distortion) but of sufficient level to drive the measurement device.
- 4) The level of the 'wanted' signal generator is adjusted to provide the level, as measured at ©, specified in clause 4.2.4.
- 5) The audio output, measured using the measurement device, is recorded as the signal level, S.
- 6) The modulating audio signal for the 'wanted' signal generator is removed. The audio output, measured using the measurement device, is recorded as the noise level, N.
- 7) If the impairment criteria given in clause 4.2.4 are met then the receiver has passed the test.

5.3.4.2 DAB and DRM sensitivity measurements

- 1) The 'unwanted' signal generator remains switched off for the duration of the test.
- 2) The 'wanted' signal generator is set to the required modulation method and test configuration as specified in clause 4.2.3, and to the frequency specified in clause 4.2.4. The signal level is adjusted to provide the level, as measured at ©, specified in clause 4.2.4 plus 30 dB.
- 3) The receiver is tuned to the frequency of the 'wanted' signal generator and the required service is selected using the UI. The audio level shall be set so as to provide clean 1 kHz audio tone at the audio output (that is less than 10 % total harmonic distortion) but of sufficient level to drive the measurement device.
- 4) The level of the 'wanted' signal generator is adjusted to provide the level, as measured at ©, specified in clause 4.2.4.
- 5) If the impairment criteria given in clause 4.2.4 are met then the receiver has passed the test.

5.3.5 Adjacent channel selectivity and blocking measurement methods

5.3.5.1 AM and FM adjacent channel selectivity and blocking measurements

The means of generating the noise modulation for AM and FM 'unwanted' signals is shown in figure 5. It is feasible to use a PC to generate these signals, but care is needed to ensure freedom from out-of-band artifacts.

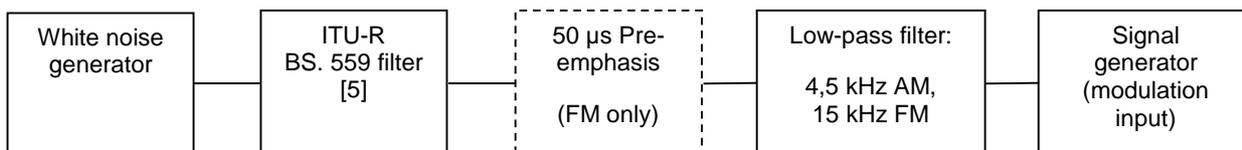


Figure 5: Arrangement for generating AM and FM interferers

Care needs to be exercised in setting up the modulation level. Normally a quasi-peak detector is appropriate. A useful technique for FM is to switch off the pre-emphasis and then apply a 1 kHz audio tone to the modulation input of the generator. The tone is adjusted in level to achieve 19 kHz peak deviation. The tone is measured with an RMS voltmeter and replaced with noise of the same RMS voltage. With the pre-emphasis restored, the deviation should now be 32 kHz quasi-peak:

- 1) The 'wanted' signal generator is set to the required modulation method and test configuration as specified in clause 4.2.3, and to the frequency specified in clause 4.2.5. The signal level is adjusted to provide the level, as measured at ©, specified in clause 4.2.5, with the 'unwanted' generator switched off.
- 2) The receiver is tuned to the frequency of the 'wanted' signal generator. The audio level shall be set so as to provide clean 1 kHz audio tone at the audio output (that is less than 10 % total harmonic distortion) but of sufficient level to drive the measurement device.
- 3) The 'unwanted' signal generator is set to the required modulation method and test configuration as specified in clause 4.2.3, and to the frequency calculated from the wanted signal centre frequency and the required offset specified in clause 4.2.5. The signal level is adjusted to provide the level, as measured at ©, specified in clause 4.2.5, with the 'wanted' generator switched off. For the blocking test only, the audio modulation of the 'unwanted' signal shall be removed whilst measuring the level at ©.
- 4) The 'wanted' signal generator is switched back on.
- 5) The audio output, measured using the measurement device, is recorded as the signal level, S.
- 6) The modulating audio signal for the 'wanted' signal generator is removed. The audio output, measured using the measurement device, is recorded as the noise level, N.
- 7) If the impairment criteria given in clause 4.2.5 are met then the receiver has passed the test.

5.3.5.2 DAB and DRM adjacent channel selectivity and blocking measurements

- 1) The 'wanted' signal generator is set to the required modulation method and test configuration as specified in clause 4.2.3, and to the frequency specified in clause 4.2.5. The signal level is adjusted to provide the level, as measured at ©, specified in clause 4.2.5, with the 'unwanted' generator switched off.
- 2) The receiver is tuned to the frequency of the 'wanted' signal generator. The audio level shall be set so as to provide clean 1 kHz audio tone at the audio output (that is less than 10 % total harmonic distortion) but of sufficient level to drive the measurement device.
- 3) The 'unwanted' signal generator is set to the required modulation method and test configuration as specified in clause 4.2.3, and to the frequency calculated from the wanted signal centre frequency and the required offset specified in clause 4.2.5. The signal level is adjusted to provide the level, as measured at ©, specified in clause 4.2.5, with the 'wanted' generator switched off. For the blocking test only, the audio modulation of the 'unwanted' signal shall be removed whilst measuring the level at ©.
- 4) The 'wanted' signal generator is switched back on.
- 5) If the impairment criteria given in clause 4.2.5 are met then the receiver has passed the test.

5.3.6 Unwanted emissions in the spurious domain

5.3.6.1 Methods of measurement

Refer to CENELEC EN 55032 [3].

Annex A (normative): Relationship between the present document and the essential requirements of Directive 2014/53/EU

The present document has been prepared under the Commission's standardisation request C(2015) 5376 final [i.9] to provide one voluntary means of conforming to the essential requirements of Directive 2014/53/EU on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC [i.1].

Once the present document is cited in the Official Journal of the European Union under that Directive, compliance with the normative clauses of the present document given in table A.1 confers, within the limits of the scope of the present document, a presumption of conformity with the corresponding essential requirements of that Directive, and associated EFTA regulations.

Table A.1: Relationship between the present document and the essential requirements of Directive 2014/53/EU

Harmonised Standard ETSI EN 303 345				
The following requirements are relevant to the presumption of conformity under the article 3.2 of Directive 2014/53/EU [i.1]				
Requirement			Requirement Conditionality	
No	Description	Reference: Clause No	U/C	Condition
1	Sensitivity	4.2.4	U	
2	Receiver adjacent channel selectivity and blocking	4.2.5	U	
3	Unwanted emissions in the spurious domain	4.2.6	U	

Key to columns:

Requirement:

No A unique identifier for one row of the table which may be used to identify a requirement.

Description A textual reference to the requirement.

Clause Number Identification of clause(s) defining the requirement in the present document unless another document is referenced explicitly.

Requirement Conditionality:

U/C Indicates whether the requirement shall be unconditionally applicable (U) or is conditional upon the manufacturers claimed functionality of the equipment (C).

Condition Explains the conditions when the requirement shall or shall not be applicable for a requirement which is classified "conditional".

Presumption of conformity stays valid only as long as a reference to the present document is maintained in the list published in the Official Journal of the European Union. Users of the present document should consult frequently the latest list published in the Official Journal of the European Union.

Other Union legislation may be applicable to the product(s) falling within the scope of the present document.

Annex B (informative): Commentary on development of the present document

The present document applies to devices that receive broadcast sound services, whether analogue or digital modulation is used, and such devices have not had such requirements before. Due discussion took place regarding the test requirements and limits that were essential for the fulfilment of the directive, and that discussion revolved around the maturity of the market for analogue and digital broadcast sound receivers.

Regarding digital receivers, the requirements were relatively straightforward to agree since these systems are comparatively new and are only beginning to establish themselves in the market. The risk of product performance being associated with system performance is therefore strong, and the industry has been fairly united in agreeing performance targets that will ensure system acceptance from the public, thus avoiding market failure. Largely, the performance targets from voluntary conformance schemes, such as the UK Digital Radio Tick Mark, have been adopted here.

However, for analogue receivers, the market is long established and mature and no such correlation between the performance of individual products and the performance of the broadcast modulation method is evident. In establishing the relevant limits for analogue receivers, it has been necessary to make the appropriate decisions between receiver parameters assumed for the purposes of international frequency coordination (so called "planning parameters"), the signals that are actually on-air across Europe, manufacturing process variations, and the extremely wide variety of analogue receivers, with a broad range of price points, that the public has come to expect to be available. Especially in the case of receivers with built-in antennas, commercially successful products exist with performance that would not be seen to be "typical" in ITU-R planning documents, but which nevertheless perform adequately for their chosen usage, generally because the user has the benefit of greater signal strength than that assumed to be at the "edge of coverage".

It is unlikely that increased spectrum efficiency for the analogue broadcast bands will come from mandating requirements that exceed the current performance envelope of broadcast sound receivers. However, over time, as manufacturers become more aware of the factors that influence the requirements of the present document, improved performance figures could be introduced.

Annex C (informative): Change History

Version	Information about changes
1.1.1	First published version.

History

Document history				
V1.1.0	July 2015	EN Approval Procedure	AP 20151127:	2015-07-30 to 2015-11-27
V1.1.1	July 2016	EN Approval Procedure	AP 20161011:	2016-07-13 to 2016-10-11