



INTERIM
EUROPEAN
TELECOMMUNICATION
STANDARD

DRAFT
pr I-ETS 300 808

September 1996

Source: ETSI TC-ECMA

Reference: DI/ECMA-00114

ICS: 35.120

Key words: ANF, CTM, mobility, PISN, PTN, QSIG, stage 3

**Private Integrated Services Network (PISN);
Inter-exchange signalling protocol;
Cordless terminal outgoing call additional network feature**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1996. All rights reserved.

Contents

Foreword		5
1	Scope	7
2	Conformance.....	7
3	References.....	7
4	Definitions.....	8
4.1	External definitions.....	8
4.2	Home data base (HDB)	8
4.3	Home PINX.....	8
5	List of acronyms	8
6	Signalling protocol for the support of ANF-CTMO.....	9
6.1	ANF-CTMO description	9
6.2	ANF-CTMO operational requirements	9
6.2.1	Requirements on the Originating PINX	9
6.2.2	Requirements on the Home PINX.....	9
6.2.3	Requirements on a Transit PINX	9
6.3	ANF-CTMO coding requirements	10
6.3.1	Operations.....	10
6.3.2	Information elements.....	10
6.3.2.1	Facility information element.....	10
6.3.2.2	Other information elements	10
6.3.3	Messages	10
6.4	ANF-CTMO State definitions	11
6.4.1	States at the Originating PINX	11
6.4.1.1	CTMO-Idle	11
6.4.2	States at the Home PINX	11
6.4.2.1	CTMO-Idle	11
6.4.2.2	CTMO-Await-Info.....	11
6.5	ANF-CTMO signalling procedures.....	11
6.5.1	Actions at the Originating PINX.....	11
6.5.1.1	Normal procedures	11
6.5.1.2	Exceptional procedures	11
6.5.2	Actions at the Home PINX.....	11
6.5.2.1	Normal procedures	12
6.5.2.2	Exceptional procedures	12
6.5.3	Actions at the Transit PINX	12
6.6	Impact of interworking with public ISDNs	12
6.7	Impact of interworking with non-ISDNs.....	12
6.8	Protocol interactions between ANF-CTMO and other supplementary services and ANFs.....	12
6.8.1	Interaction with Calling Name Identification Presentation (SS-CNIP)	13
6.8.2	Interaction with Connected Name Identification Presentation (SS-CONP)	13
6.8.3	Interaction with Call Transfer (SS-CT)	13
6.8.4	Interaction with Call Diversion (SS-DIV).....	13
6.8.5	Interaction with Call Completion to Busy Subscriber (SS-CCBS)	13
6.8.6	Interaction with Call Completion on No Reply (SS-CCNR)	13
6.8.7	Interaction with Call Offer (SS-CO)	13
6.8.8	Interaction with Call Intrusion (SS-CI)	13
6.8.9	Interaction with Do Not Disturb (SS-DND)	13
6.8.10	Interaction with Do Not Disturb Override (SS-DNDO).....	13
6.8.11	Interaction with Path Replacement (ANF-PR).....	13
6.8.12	Interaction with Recall (SS-RE).....	13

6.8.13	Interaction with Advice of Charge (SS-AOC).....	13
6.8.14	Interaction with Call Interception (ANF-CINT)	13
6.8.15	Interaction with Cordless Terminal Mobility Incoming Call (ANF-CTMI).....	13
6.8.16	Interaction with Cordless Terminal Location Registration (SS-CTLR).....	13
6.9	Parameter values (timers).....	14
6.9.1	Timers at the Originating PINX.....	14
6.9.2	Timers at the Home PINX.....	14
Annex A (normative):	Protocol Implementation Conformance Statement (PICS) Proforma	15
A.1	Introduction.....	15
A.2	Instructions for completing the PICS proforma	15
A.2.1	General structure of the PICS proforma	15
A.2.2	Additional Information	16
A.2.3	Exception Information	16
A.3	PICS proforma for ECMA-233.....	17
A.3.1	Implementation Identification	17
A.3.2	Protocol Summary	17
A.3.3	General	18
A.3.4	Procedures	18
A.3.5	Coding	18
A.3.6	Timers.....	18
A.3.7	Protocol interactions	19
A.3.7.1	Interaction with Call Transfer	19
A.3.7.2	Interaction with Call Diversion.....	19
A.3.7.3	Interaction with Path Replacement	19
A.3.7.4	Interaction with Call Interception	20
A.3.7.5	Interaction with Cordless Terminal Incoming Call.....	20
Annex B (informative):	Examples of message sequences.....	21
B.1	Successful invocation of ANF-CTMO with overlap operation	21
B.2	Successful invocation of ANF-CTMO with en-bloc operation	22
Annex C (informative):	Specification and Description Language (SDL) representation of procedures ..	23
C.1	Behaviour of the Originating PINX	24
C.2	Behaviour of the Home PINX	25
Annex D (informative):	Imported data types	27
History	28

Foreword

This draft Interim European Telecommunication Standard (I-ETS) has been produced by the Communication, Networks, and Systems Interconnection Technical Committee (TC32) of ECMA on behalf of its members and those of the European Telecommunications Standards Institute (ETSI), and is now submitted for the Public Enquiry phase of the ETSI standards approval procedure.

An ETSI standard may be given I-ETS status either because it is regarded as a provisional solution ahead of a more advanced standard, or because it is immature and requires a "trial period". The life of an I-ETS is limited to three years after which it can be converted into an ETS, have its life extended for a further two years, be replaced by a new version, or be withdrawn.

Proposed announcement date	
Date of latest announcement of this I-ETS (doa):	3 months after ETSI publication

This I-ETS was produced by ECMA using the ECMA guidelines for the production of standards and using the ECMA stylesheet. In order to avoid undue delays in the approval process for this I-ETS, it has been agreed that this ETS will not be converted to the ETSI stylesheet.

Brief History

This Standard is one of a series of ECMA standards defining services and signalling protocols applicable to Private Integrated Services Networks (PISNs). The series uses the ISDN concepts as developed by ITU-T (formerly CCITT) and is also within the framework of standards for open systems interconnection as defined by ISO.

This Standard specifies the signalling protocol for use at the Q reference point in support of the Cordless Terminal Outgoing Call additional network feature.

The Standard is based upon the practical experience of ECMA member companies and the results of their active and continuous participation in the work of ISO/IEC JTC1, ITU-T, ETSI and various international and national standardization bodies. It has been produced under ETSI work item DE/ECMA-00114. It represents a pragmatic and widely based consensus.

This ECMA Standard is envisaged for contribution to ISO/IEC JTC1 under the terms of the fast-track procedure for adoption as an ISO/IEC International Standard.

1 Scope

This Standard specifies the signalling protocol for the support of the Cordless Terminal Outgoing Call additional network feature (ANF-CTMO) at the Q reference point between Private Integrated Services Network Exchanges (PINX) connected together within a Private Integrated Services Network (PISN).

ANF-CTMO permits the PISN to process call requests from a CTM user at the home location, if required.

The Q reference point is defined in ISO/IEC 11579-1.

Service specifications are produced in three stages and according to the method specified in ETS 300 387. This Standard contains the stage 3 specification for the Q reference point and satisfies the requirements identified by the stage 1 and stage 2 specifications in ETS 300 694 and ETS 300 695, respectively.

The signalling protocol for ANF-CTMO operates on top of the signalling protocol for basic circuit switched call control, as specified in ISO/IEC 11572, and uses certain aspects of the generic procedures for the control of supplementary services specified in ISO/IEC 11582.

This Standard also specifies additional signalling protocol requirements for the support of interactions at the Q reference point between ANF-CTMO and other supplementary services and ANFs.

NOTE 1

Additional interactions that have no impact on the signalling protocol at the Q reference point can be found in the relevant stage 1 specifications.

This Standard is applicable to PINXs which can interconnect to form a PISN.

2 Conformance

In order to conform to this Standard, a PINX shall satisfy the requirements identified in the Protocol Implementation Conformance Statement (PICS) proforma in annex A.

Conformance to this Standard includes conforming to those clauses that specify protocol interactions between ANF-CTMO and other supplementary services and ANFs for which signalling protocols at the Q reference point are supported in accordance with the stage 3 standards concerned.

3 References

ECMA-215	Private Telecommunication Networks (PTN) - Inter-Exchange Signalling Protocol - Cordless Terminal Incoming Call Additional Network Feature (QSIG-CTMI) (1994)
ECMA-221	Private Integrated Services Network (PISN) - Inter-Exchange Signalling Protocol - Call Interception Additional Network Feature (QSIG-CINT) (1995)
ISO/IEC 11572	Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Circuit mode bearer services - Inter-exchange signalling procedures and protocol (1994)
ISO/IEC 11579-1	Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Part 1: Reference configuration for PISN Exchanges (PINX) (1994)
ISO/IEC 11582	Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Generic functional protocol for the support of supplementary services - Inter-exchange signalling procedures and protocol (1995)
ISO/IEC 13869	Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Inter-exchange signalling protocol - Call transfer supplementary service (1995)
ISO/IEC 13873	Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Inter-exchange signalling protocol - Call diversion supplementary services (1995)

ISO/IEC 13874	Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Inter-exchange signalling protocol - Path replacement additional network feature (1995)
ETS 300 387	Private Telecommunication Network (PTN); Method for the specification of basic and supplementary services (1994)
Final draft ETS 300 694	Private Integrated Services Network (PISN); Cordless Terminal Mobility (CTM); Call handling additional network features; Service description
Final draft ETS 300 695	Private Integrated Services Network (PISN); Cordless Terminal Mobility (CTM); Call handling additional network features; Functional capabilities and information flows
CCITT Rec. I.112	Vocabulary of terms for ISDNs (1988)
CCITT Rec. Z.100	Specification and description language (1988)

4 Definitions

For the purpose of this Standard the following definitions apply.

4.1 External definitions

This Standard uses the following terms defined in other documents:

- Additional Network Feature (ANF)	(ISO/IEC 11582)
- Application Protocol Data Unit (APDU)	(ISO/IEC 11582)
- Call, Basic Call	(ISO/IEC 11582)
- Call Related	(ISO/IEC 11582)
- CTM user	(ETS 300 694)
- End PINX	(ISO/IEC 11582)
- Interpretation APDU	(ISO/IEC 11582)
- Network Facility Extension (NFE)	(ISO/IEC 11582)
- Originating PINX	(ISO/IEC 11572)
- Private Integrated Services Network (PISN)	(ISO/IEC 11579-1)
- Private Integrated Services Network Exchange (PINX)	(ISO/IEC 11579-1)
- Signalling	(CCITT Rec. I.112)
- Supplementary Service Control Entity	(ISO/IEC 11582)
- Subsequent PINX	(ISO/IEC 11572)
- Terminating PINX	(ISO/IEC 11572)
- Transit PINX	(ISO/IEC 11572)

4.2 Home data base (HDB)

The database in which the data on the current location and associated parameters of a cordless terminal or mobile user are stored.

4.3 Home PINX

The PINX which has direct access to the HDB entry for a particular CTM user.

5 List of acronyms

ANF	Additional Network Feature
ANF-CTMO	Additional Network Feature Outgoing CTM Call Handling
APDU	Application Protocol Data Unit

ASN.1	Abstract Syntax Notation no. 1
CTM	Cordless Terminal Mobility
HDB	Home Data Base
ISDN	Integrated Services Digital Network
NFE	Network Facility Extension
PICS	Protocol Implementation Conformance Statement
PINX	Private Integrated Services Network Exchange
PISN	Private Integrated Services Network
SDL	Specification and Description Language

6 Signalling protocol for the support of ANF-CTMO

6.1 ANF-CTMO description

ANF-CTMO permits the PISN to process call requests from a CTM user at the home location, if required.

NOTE 2

Further actions that may be performed at the visited location - verification of the CTM user's identity, local access to the service profile, local call processing - are outside the scope of this Standard.

6.2 ANF-CTMO operational requirements

6.2.1 Requirements on the Originating PINX

Call establishment procedures for the outgoing side of an inter-PINX link and call release procedures, as specified in ISO/IEC 11572, shall apply.

Generic procedures for the call related control of supplementary services, as specified in ISO/IEC 11582 for an End PINX, shall apply.

6.2.2 Requirements on the Home PINX

Call establishment procedures for the incoming side of an inter-PINX link and call release procedures, as specified in ISO/IEC 11572, shall apply.

Generic procedures for the call related control of supplementary services, as specified in ISO/IEC 11582 for an End PINX, shall apply.

6.2.3 Requirements on a Transit PINX

Basic call procedures for call establishment and call clearing at a Transit PINX, as specified in ISO/IEC 11572, shall apply.

Generic procedures for the call related control of supplementary services, as specified in ISO/IEC 11582 for a Transit PINX, shall apply.

6.3 ANF-CTMO coding requirements**6.3.1 Operations**

```

ANF-CTMO-Operations {      iso (1)  identified-organization (3)  icd-ecma (0012)
standard (0)
                        qsig-cordless-terminal-outgoing-call (233)  operations (0) }
DEFINITIONS      EXPLICIT TAGS ::=
BEGIN
IMPORTS
    OPERATION, ERROR      FROM      Remote-Operation-Notation
                        { joint-iso-ccitt (2) remote-operations (4) notation (0) }
    Extension      FROM      Manufacturer-specific-service-extension-definition
                        { iso (1) standard (0)
                        pss1-generic-procedures (11582)  msi-definition (0) }
    PartyNumber      FROM      Addressing-Data-Elements
                        { iso (1) standard (0)
                        pss1-generic-procedures (11582)  addressing-data-elements (9) };
CtmoCall      ::=      OPERATION
                        ARGUMENT      CtmoArg
CtmoArg      ::=      SEQUENCE {
                        destinationNumber [0] PartyNumber OPTIONAL,
                        sendingComplete [1] IMPLICIT NULL      OPTIONAL,
                        extension      CHOICE
                        { single      [2] IMPLICIT Extension,
                        multiple      [3] IMPLICIT SEQUENCE OF
                        } OPTIONAL }
Extension
ctmoCall      CtmoCall ::= 71
END -- of ANF-CTMO-Operations

```

6.3.2 Information elements**6.3.2.1 Facility information element**

The operation defined in 6.3.1 shall be coded in the Facility information element in accordance with 11.3.3 of ISO/IEC 11582.

The Facility information element shall always contain an NFE with the destinationEntity element having value endPINX.

A Facility information element conveying a ctmoCall invoke APDU shall also contain an Interpretation APDU with value clearCallIfAnyInvokePduNotRecognised, if sent in a SETUP message. If sent in a FACILITY message, the Interpretation APDU shall either be omitted or included with value rejectAnyUnrecognisedInvokePdu.

6.3.2.2 Other information elements

Any other information elements (e.g. Calling party number, Called party number) shall be coded in accordance with the rules of ISO/IEC 11572 and ISO/IEC 11582.

6.3.3 Messages

The Facility information element shall be conveyed in the messages as specified in clause 10 of ISO/IEC 11582.

6.4 ANF-CTMO State definitions

6.4.1 States at the Originating PINX

The procedures for the Originating PINX are written in terms of the following conceptual states existing within the ANF-CTMO Service Control entity in that PINX in association with a particular CTMO Request.

6.4.1.1 CTMO-Idle

This state exists if ANF-CTMO is not active.

6.4.2 States at the Home PINX

The procedures for the Home PINX are written in terms of the following conceptual states existing within the ANF-CTMO Service Control entity in that PINX in association with a particular CTMO Request.

6.4.2.1 CTMO-Idle

This state exists if ANF-CTMO is not active.

6.4.2.2 CTMO-Await-Info

This state exists while further address information can be received in overlap mode.

6.5 ANF-CTMO signalling procedures

Examples of message sequences are shown in annex B.

6.5.1 Actions at the Originating PINX

The SDL representation of procedures at the Originating PINX is shown in C.1 of annex C.

6.5.1.1 Normal procedures

If the Originating PINX decides to pass to the Home PINX for processing a call request that was initiated by the CTM user, the Originating PINX shall send a SETUP message according to ISO/IEC 11572 to the Home PINX. The SETUP message shall contain a ctmoCall invoke APDU, in the Calling party number information element the number of the CTM user, and in the Called party number information element a number sufficient to route to the CTM user's Home PINX. If (part of) the intended destination number is already available it shall be included in element destinationNumber of the invoke APDU's argument. If the destination number is complete, element sendingComplete may also be included in the argument.

NOTE 3

The number to be used in the Called party number information element is outside the scope of this Standard. It could, for example, be the number of the CTM user.

Subsequently, if the destination number sent in the SETUP message was not complete, additional address information from the CTM user shall be included in the argument of ctmoCall invoke APDUs, which shall be sent to the Home PINX in FACILITY messages, with the digit(s) encoded in element destinationNumber. The end of number information transmission may be indicated to the Home PINX by means of a sendingComplete element.

6.5.1.2 Exceptional procedures

Not applicable.

6.5.2 Actions at the Home PINX

The SDL representation of procedures at the Home PINX is shown in C.2 of annex C.

6.5.2.1 Normal procedures

If on receipt of a SETUP message with a ctmoCall invoke APDU enough digits of the destination number are present in the argument of the APDU to select a route for call extension, the Home PINX shall initiate call establishment towards the intended destination in accordance with ISO/IEC 11572 and join the two call legs. If the destination number is not complete, the Home PINX shall enter state CTMO-Await-Info, optionally send a PROGRESS message to the Originating PINX to stop T310 at Transit PINXs, and start timer T1. Otherwise it shall remain in state CTMO-Idle.

While in state CTMO-Await-Info, additional number information received as argument of ctmoCall invoke APDUs in a FACILITY message shall be used to select a route for call extension or, if the call has already been extended, passed on to the Subsequent PINX. If the Home PINX regards the number information complete it shall stop timer T1, initiate call establishment towards the intended destination in accordance with ISO/IEC 11572 if not already done, join the two call legs, and return to state CTMO-Idle. Otherwise it shall restart timer T1 and stay in state CTMO-Await-Info.

If a sendingComplete element is contained in a ctmoCall invoke APDU received while in state CTMO-Await-Info, the Home PINX shall process any number information present in the argument, stop timer T1, initiate call establishment towards the intended destination in accordance with ISO/IEC 11572 if not already done, join the two call legs, and return to state CTMO-Idle.

6.5.2.2 Exceptional procedures

If timer T1 expires the Home PINX shall return to state CTMO-Idle and

- if the number information received so far is considered sufficient, initiate call establishment towards the intended destination in accordance with ISO/IEC 11572, if not already done, and join the two call legs;
- if the information is not sufficient to proceed, initiate call clearing with an appropriate cause value, e.g. #28 'invalid number format (address incomplete)'.

A ctmoCall invoke APDU received in a FACILITY message while in state CTMO-Idle shall be ignored.

6.5.3 Actions at the Transit PINX

No special actions are required for ANF-CTMO.

6.6 Impact of interworking with public ISDNs

Not applicable.

6.7 Impact of interworking with non-ISDNs

Not applicable.

6.8 Protocol interactions between ANF-CTMO and other supplementary services and ANFs

This clause specifies protocol interactions with other supplementary services and ANFs for which stage 3 standards had been published at the time of publication of this Standard. For interactions with supplementary services and ANFs for which stage 3 standards are published subsequent to the publication of this Standard, see those other stage 3 standards.

NOTE 4

Simultaneous conveyance of APDUs for ANF-CTMO and another supplementary service or ANF in the same message, each in accordance with the requirements of its respective stage 3 standard, does not, on its own, constitute a protocol interaction.

NOTE 5

The transmission of a Facility information element on one leg as a result of receiving a Facility information element on the other leg does not constitute a protocol interaction.

6.8.1 Interaction with Calling Name Identification Presentation (SS-CNIP)

No interaction.

6.8.2 Interaction with Connected Name Identification Presentation (SS-CONP)

No interaction.

6.8.3 Interaction with Call Transfer (SS-CT)

The Home PINX may act as the Transferring PINX if both the primary and the secondary call pass through the Home PINX, otherwise a request to transfer a call shall be rejected when received at the Home PINX.

6.8.4 Interaction with Call Diversion (SS-DIV)

On receipt of a callRerouting invoke APDU while in state CTMO-Idle the Home PINX may act as the Rerouting PINX.

6.8.5 Interaction with Call Completion to Busy Subscriber (SS-CCBS)

No interaction.

6.8.6 Interaction with Call Completion on No Reply (SS-CCNR)

No interaction.

6.8.7 Interaction with Call Offer (SS-CO)

No interaction.

6.8.8 Interaction with Call Intrusion (SS-CI)

No interaction.

6.8.9 Interaction with Do Not Disturb (SS-DND)

No interaction.

6.8.10 Interaction with Do Not Disturb Override (SS-DNDO)

No interaction.

6.8.11 Interaction with Path Replacement (ANF-PR)

The Home PINX may act as the Cooperating PINX when receiving a prPropose invoke APDU from either side.

6.8.12 Interaction with Recall (SS-RE)

No interaction.

6.8.13 Interaction with Advice of Charge (SS-AOC)

No interaction.

6.8.14 Interaction with Call Interception (ANF-CINT)

The Home PINX may act as Intercepting PINX.

6.8.15 Interaction with Cordless Terminal Mobility Incoming Call (ANF-CTMI)

A SETUP containing a ctmoCall invoke APDU shall not be redirected by means of ANF-CTMI.

6.8.16 Interaction with Cordless Terminal Location Registration (SS-CTRL)

No interaction.

6.9 Parameter values (timers)

6.9.1 Timers at the Originating PINX

None.

6.9.2 Timers at the Home PINX

T1 Information receiving

This timer is started on receipt of the first ctmoCall invoke APDU with incomplete number information, restarted on receipt of a further ctmoCall invoke APDU with incomplete number information, and stopped when a ctmoCall invoke APDU containing final number information or an element sendingComplete is received.

On expiry of timer T1 the call is either cleared or proceeds as normal basic call.

The value of timer T1 should be in the range 14 - 16 seconds.

Annex A (normative): Protocol Implementation Conformance Statement (PICS) Proforma

A.1 Introduction

The supplier of a protocol implementation which is claimed to conform to this Standard shall complete the following Protocol Implementation Conformance Statement (PICS) proforma.

A completed PICS proforma is the PICS for the implementation in question. The PICS is a statement of which capabilities and options of the protocol have been implemented. The PICS can have a number of uses, including use:

- by the protocol implementor, as a check list to reduce the risk of failure to conform to the standard through oversight;
- by the supplier and acquirer, or potential acquirer, of the implementation, as a detailed indication of the capabilities of the implementation, stated relative to the common basis for understanding provided by the Standard's PICS proforma;
- by the user or potential user of the implementation, as a basis for initially checking the possibility of interworking with another implementation - while interworking can never be guaranteed, failure to interwork can often be predicted from incompatible PICSs;
- by a protocol tester, as the basis for selecting appropriate tests against which to assess the claim for conformance of the implementation.

A.2 Instructions for completing the PICS proforma

A.2.1 General structure of the PICS proforma

The PICS proforma is a fixed format questionnaire divided into subclauses each containing a group of individual items. Each item is identified by an item number, the name of the item (question to be answered), and the reference(s) to the clause(s) specifying the item in the main body of this Standard.

The "Status" column indicates whether an item is applicable and if so whether support is mandatory or optional. The following terms are used:

m	mandatory (the capability is required for conformance to the protocol);
o	optional (the capability is not required for conformance to the protocol, but if the capability is implemented it is required to conform to the protocol specifications);
o.<n>	optional, but support of at least one of the group of options labelled by the same numeral <n> is required;
x	prohibited;
c.<cond>	conditional requirement, depending on support for the item or items listed in condition <cond>;
<item>:m	simple conditional requirement, the capability being mandatory if item number <item> is supported, otherwise not applicable;
<item>:o	simple conditional requirement, the capability being optional if item number <item> is supported, otherwise not applicable.

Answers to the questionnaire items are to be provided either in the "Support" column, by simply marking an answer to indicate a restricted choice (Yes or No), or in the "Not Applicable" column (N/A).

A.2.2 Additional Information

Items of Additional Information allow a supplier to provide further information intended to assist the interpretation of the PICS. It is not intended or expected that a large quantity will be supplied, and a PICS can be considered complete without any such information. Examples might be an outline of the ways in which a (single) implementation can be set up to operate in a variety of environments and configurations.

References to items of Additional Information may be entered next to any answer in the questionnaire, and may be included in items of Exception information.

A.2.3 Exception Information

It may occasionally happen that a supplier will wish to answer an item with mandatory or prohibited status (after any conditions have been applied) in a way that conflicts with the indicated requirement. No pre-printed answer will be found in the Support column for this. Instead, the supplier is required to write into the Support column an x.<i> reference to an item of Exception Information, and to provide the appropriate rationale in the Exception item itself.

An implementation for which an Exception item is required in this way does not conform to this Standard. A possible reason for the situation described above is that a defect in the Standard has been reported, a correction for which is expected to change the requirement not met by the implementation.

A.3 PICS proforma for ECMA-233

A.3.1 Implementation Identification

Supplier	
Contact point for queries about the PICS	
Implementation Name(s) and Version(s)	
Other information necessary for full identification, e.g., name(s) and version(s) for machines and/or operating systems; system name(s)	

Only the first three items are required for all implementations; other information may be completed as appropriate in meeting the requirement for full identification.

The terms Name and Version should be interpreted appropriately to correspond with a supplier's terminology (e.g., Type, Series, Model).

A.3.2 Protocol Summary

Protocol Version	1.0
Addenda Implemented (if applicable)	
Amendments Implemented	
Have any exception items been required (see A.2.3) ?	No [] Yes [] (The answer YES means that the implementation does not conform to this Standard)

Date of Statement	
-------------------	--

A.3.3 General

Item	Question / feature	References	Status	N/A	Support
A1	PINX can act as Originating PINX for basic calls		o.1		Yes [] No []
A2	PINX can act as Home PINX for basic calls		o.1		Yes [] No []
A3	Support of relevant procedures of ISO/IEC 11572 and ISO/IEC 11582	6.2	m		Yes []

A.3.4 Procedures

Item	Question / feature	References	Status	N/A	Support
B1	Ctmo procedures at Originating PINX	6.5.1	A1:m	[]	m: Yes []
B2	Ctmo procedures at Home PINX	6.5.2	A2:m	[]	m: Yes []

A.3.5 Coding

Item	Question / feature	References	Status	N/A	Support
C1	Sending of ctmoCall invoke APDU	6.3.1	A1:m	[]	m: Yes []
C2	Receipt of ctmoCall invoke APDU	6.3.1	A2:m	[]	m: Yes []

A.3.6 Timers

Item	Question / feature	References	Status	N/A	Support
D1	Support of timer T1	6.8.2	A2:m	[]	m: Yes [] Value:

A.3.7 Protocol interactions

A.3.7.1 Interaction with Call Transfer

Item	Question / feature	References	Status	N/A	Support
E1	Support of Call Transfer	ISO/IEC 13869	o		Yes [] No []
E2	Home PINX acts as Transferring PINX	6.8.3	c.1	[]	o: Yes [] No []

c.1: if A2 and E1 then o else N/A

A.3.7.2 Interaction with Call Diversion

Item	Question / feature	References	Status	N/A	Support
E3	Support of Call Diversion	ISO/IEC 13873	o		Yes [] No []
E4	Home PINX acts as Rerouting PINX	6.8.4	c.2	[]	o: Yes [] No []

c.2: if A2 and E3 then o else N/A

A.3.7.3 Interaction with Path Replacement

Item	Question / feature	References	Status	N/A	Support
E5	Support of Path Replacement	ISO/IEC 13874	o		Yes [] No []
E6	Home PINX acts as Cooperating PINX	6.8.11	c.3	[]	o: Yes [] No []

c.3: if A2 and E5 then o else N/A

A.3.7.4 Interaction with Call Interception

Item	Question / feature	References	Status	N/A	Support
E7	Support of Call Interception	ECMA-221	o		Yes [] No []
E8	Home PINX acts as Intercepting PINX	6.8.13	c.4	[]	o: Yes [] No []

c.4; if A2 and E7 then o else N/A

A.3.7.5 Interaction with Cordless Terminal Incoming Call


Item	Question / feature	References	Status	N/A	Support
E9	Support of ANF-CTMI	ECMA-215	o		Yes [] No []
E10	Home PINX does not reroute SETUP with ctmoCall invoke APDU	6.8.14	c.5	[]	m: Yes []

c.5; if A2 and E9 then m else N/A

Annex B (informative): Examples of message sequences

This annex describes some typical message flows for ANF-CTMO. The following conventions are used in the figures of this annex.

- The following notation is used:

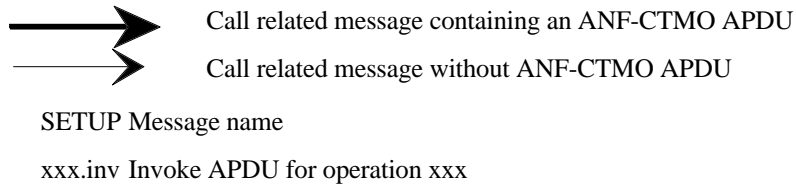

- The figures show messages exchanged via Protocol Control between the Originating PINX and a Transit PINX and between a Transit PINX and the Home PINX. Only messages relevant to ANF-CTMO are shown.
- Only the relevant information content (ANF-CTMO APDUs) is listed below each message name. The Facility information elements containing the ANF-CTMO APDUs are not explicitly shown. Information with no impact on ANF-CTMO is not shown.

B.1 Successful invocation of ANF-CTMO with overlap operation

Figure B-1 shows an example of the invocation of ANF-CTMO where the destination number is sent in pieces.

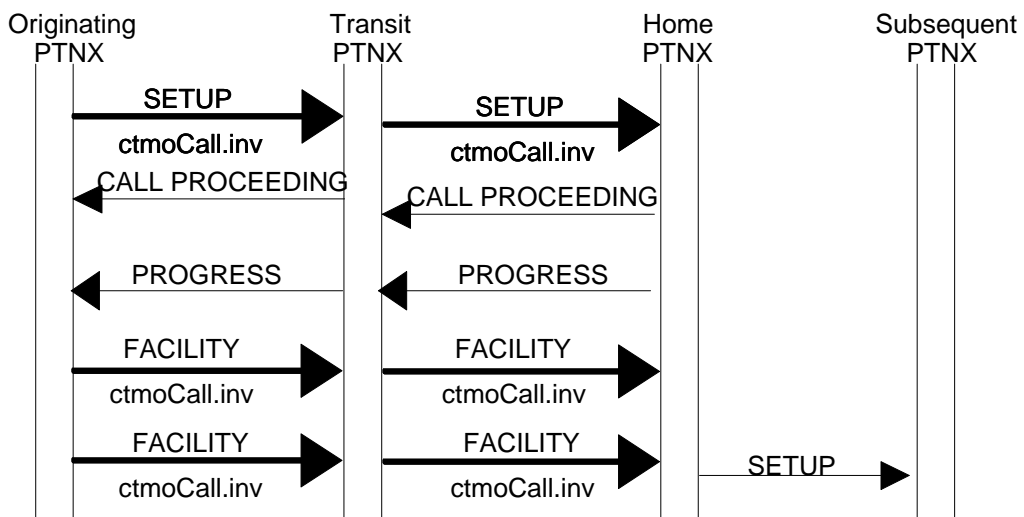


Figure B-1 - Successful invocation of ANF-CTMO with overlap operation

B.2 Successful invocation of ANF-CTMO with en-bloc operation

Figure B-2 shows an example of the invocation of ANF-CTMO where the whole destination number is sent in the first message.

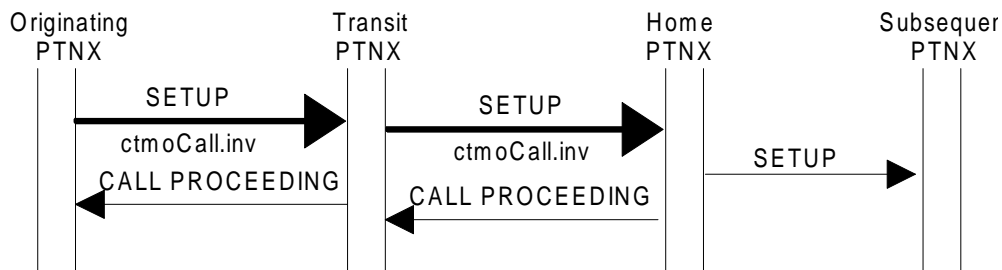


Figure B-2 - Successful invocation of ANF-CTMO with en-bloc operation

Annex C (informative): Specification and Description Language (SDL) representation of procedures

The diagrams in this annex use the Specification and Description Language defined in CCITT Recommendation Z.100 (1988).

Each diagram represents the behaviour of an ANF-CTMO Service Control entity at a particular type of PINX. In accordance with the protocol model described in ISO/IEC 11582, the Supplementary Service Control entity uses, via the Coordination function, the services of Generic Functional Procedures Control and Basic Call Control.

Where an output symbol represents a primitive to the Coordination function, and that primitive results in a message being sent, the output symbol bears the name of the message and any remote operations APDU(s) contained in that message. In the case of a message specified in ISO/IEC 11572, basic call actions associated with the sending of that message are deemed to occur.

Where an input symbol represents a primitive from the Coordination function, and that primitive is the result of a message being received, the input signal bears the name of the message and any remote operations APDU(s) contained in that message. In the case of a message specified in ISO/IEC 11572, basic call actions associated with the receipt of that message are deemed to have occurred.

The following abbreviation is used:

inv Invoke APDU

C.1 Behaviour of the Originating PINX

Figure C.1 shows the behaviour of the Originating PINX.

Input signals from the left represent internal primitives. Output signals to the right represent messages to the peer SS-Control entity (i.e. in the Home PINX).

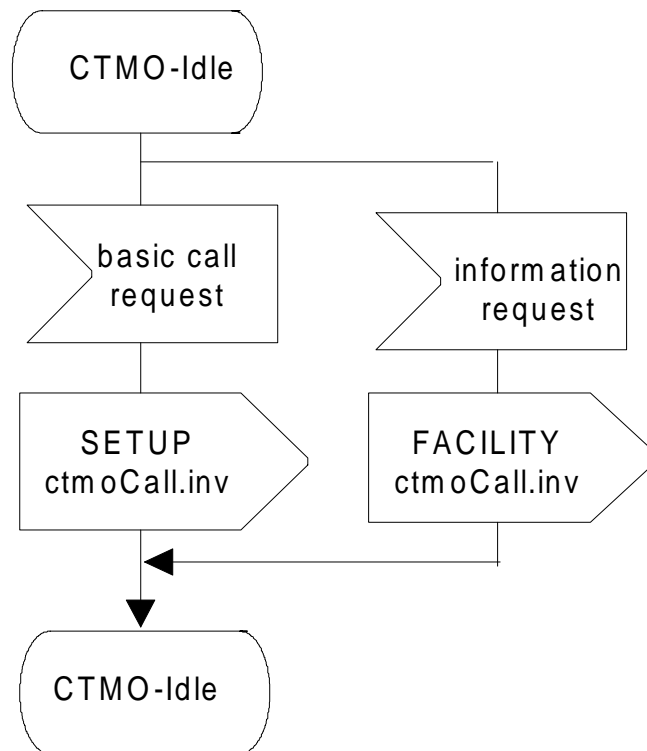


Figure C.1 - Originating PINX behaviour

C.2 Behaviour of the Home PINX

Figures C.2 and C.3 show the behaviour of the Home PINX.

Input signals from the left represent messages from the peer SS-Control entity (i.e. in the Originating PINX). Output signals to the right and input signals from the right represent internal primitives.

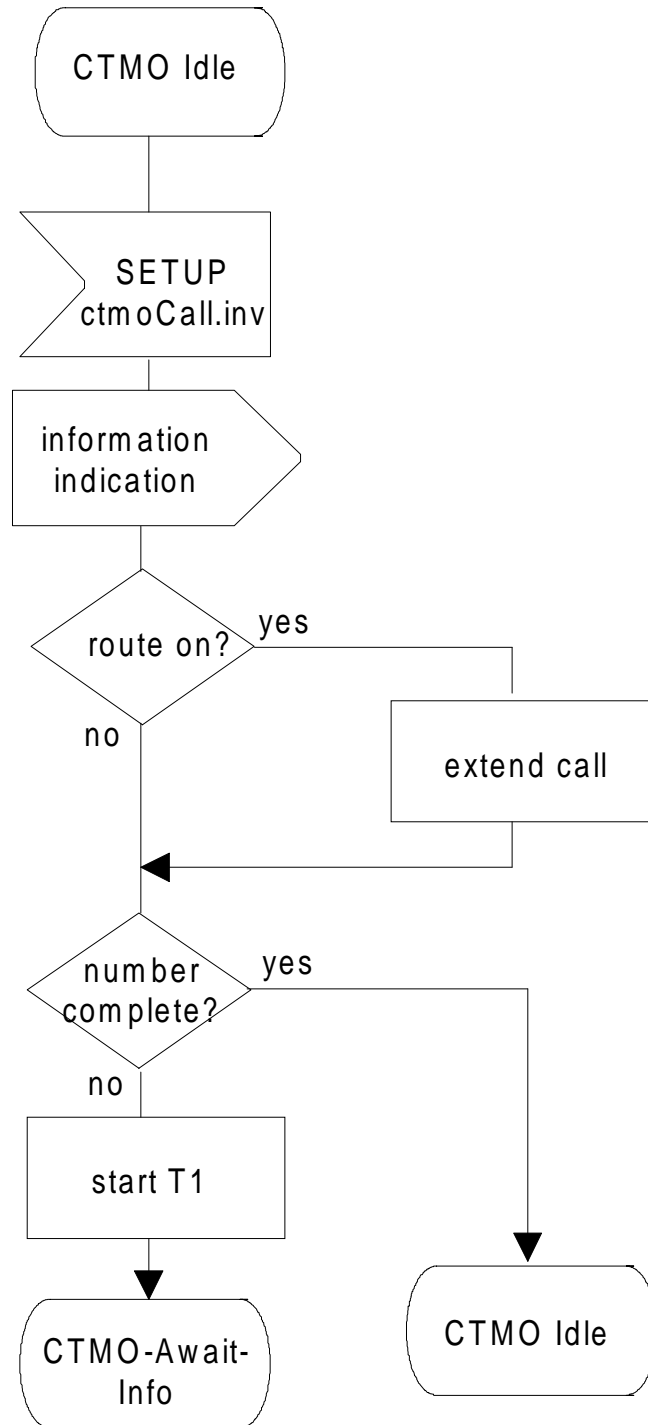


Figure C.2 - Home PINX behaviour (part 1)

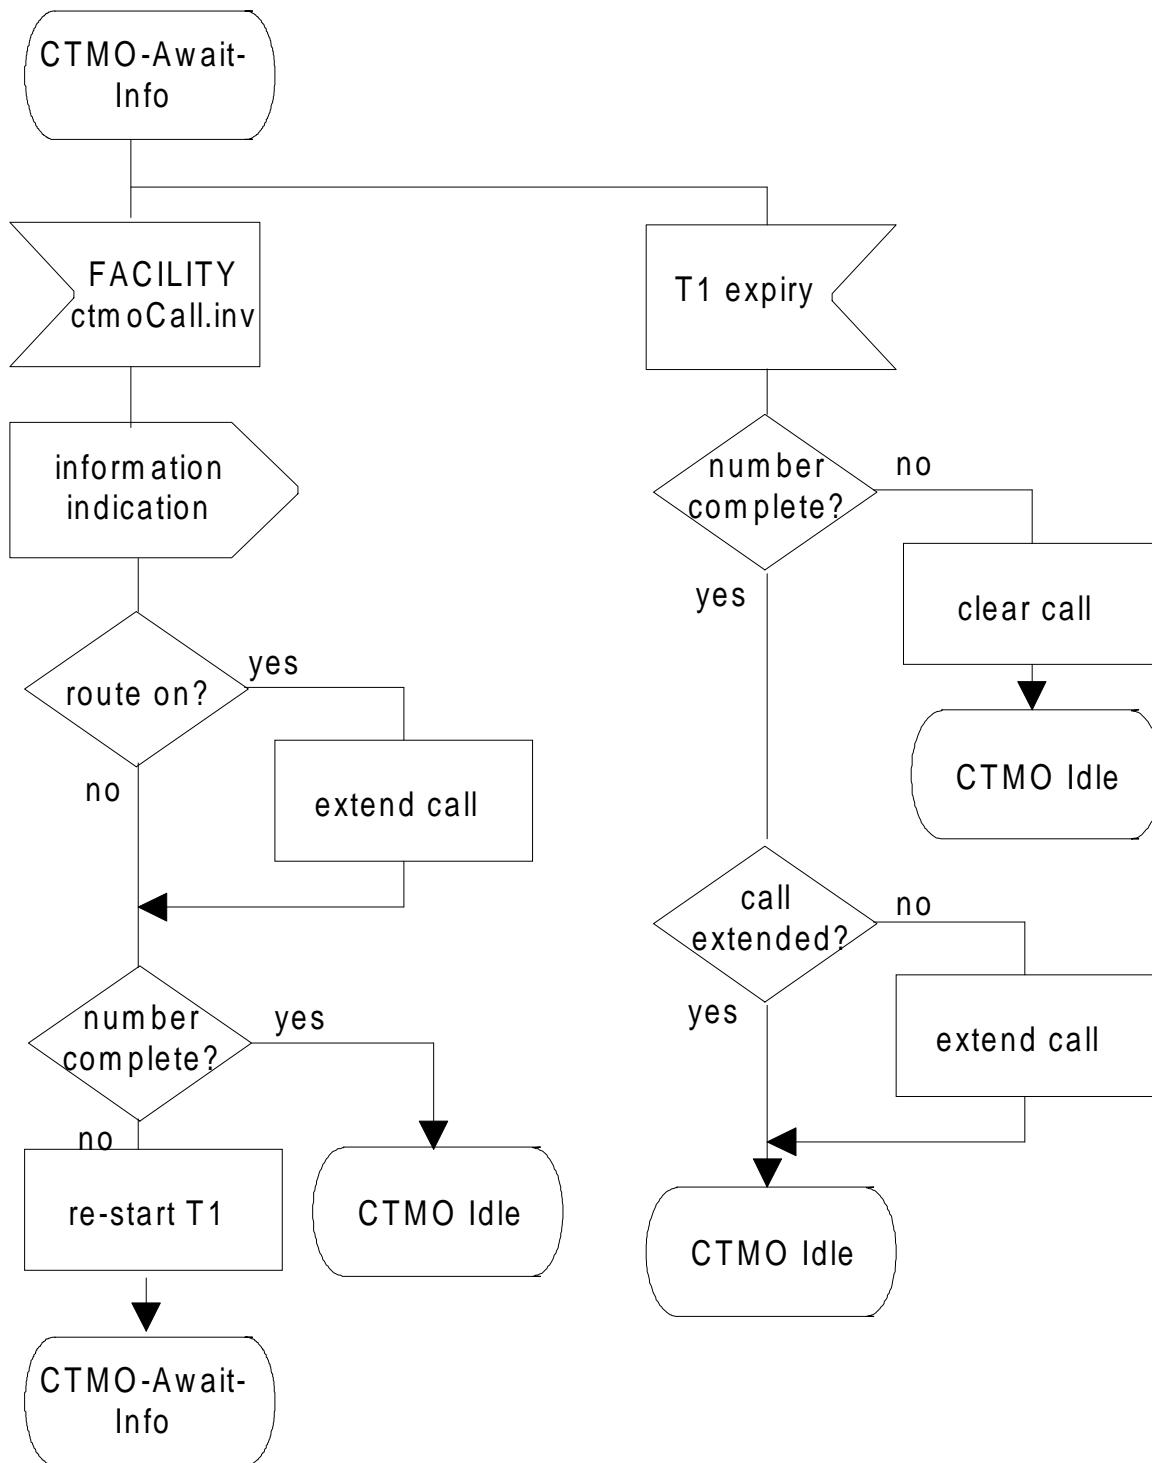


Figure C.3 - Home PINX behaviour (part 2)

Annex D (informative): Imported data types

The following is an extract from module 'Addressing-Data-Elements' defined in ISO/IEC 11582.

<i>- Definition of Type PartyNumber -</i>	
PartyNumber	::= CHOICE { unknownPartyNumber [0] IMPLICIT NumberDigits, publicPartyNumber [1] IMPLICIT PublicPartyNumber, dataPartyNumber [3] IMPLICIT NumberDigits, telexPartyNumber [4] IMPLICIT NumberDigits, privateNumber [5] IMPLICIT PrivatePartyNumber, nationalStandardPartyNumber [8] IMPLICIT NumberDigits }
NumberDigits	::= NumericString (SIZE (1..20))
PrivatePartyNumber	::= SEQUENCE { privateTypeOfNumber PrivateTypeOfNumber, privateNumberDigits NumberDigits }
PrivateTypeOfNumber	::= ENUMERATED { unknown (0), level2RegionalNumber (1), level1RegionalNumber (2), pISNSpecificNumber (3), localNumber (4), abbreviatedNumber (6) }
PublicPartyNumber	::= SEQUENCE { publicTypeOfNumber PublicTypeOfNumber, publicNumberDigits NumberDigits }
PublicTypeOfNumber	::= ENUMERATED { unknown (0), internationalNumber (1), nationalNumber (2), networkSpecificNumber (3), subscriberNumber (4), abbreviatedNumber (6) }

History

Document history	
September 1996	Public Enquiry PE 114: 1996-09-23 to 1997-01-17